



FCC TEST REPORT

No. 161100003SHA-001

Applicant : HP Inc.
26, Jiafeng Road, Waigaoqiao Free Trade,
Shanghai, China

Manufacturer : Hong Fu Jin Precision Electronics (Chong Qing)
Co., Ltd.
No.1 East district 1st Road, Shapingba District,
Chong Qing City, China

Product Name : HP rokit 130

Type/Model : SNPRH-1701

TEST RESULT : PASS

SUMMARY

The equipment complies with the requirements according to the following standard(s) or specification:

47CFR Part 15 (2015): Radio Frequency Devices

ANSI C63.10 (2013): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

RSS-247 Issue 1 (May 2015): Digital Transmission Systems (DTSSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

RSS-Gen Issue 4 (December 2014): General Requirements for Compliance of Radio Apparatus

Date of issue: February 14, 2017

Prepared by:

Nemo Li (*Project Engineer*)

Reviewed by:

Daniel Zhao (*Reviewer*)



Description of Test Facility

Name: Intertek Testing Service Limited Shanghai
Address: Building No.86, 1198 Qinzhou Road(North), Shanghai 200233, P.R.
China

FCC Registration Number: 236597
IC Assigned Code: 2402B-1

Name of contact: Jonny Jing
Tel: 86 21 61278271
Fax: 86 21 54262353

Content

SUMMARY.....	1
1 GENERAL INFORMATION	5
1.1 Description of Client.....	5
1.2 Identification of the EUT	5
1.3 Technical Specification.....	6
2 TEST SPECIFICATIONS.....	7
2.1 Standards or specification	7
2.2 Mode of operation during the test.....	7
2.3 Test software list	7
2.4 Test peripherals list	7
2.5 Instrument list	8
2.6 Test Summary	9
2.7 Measurement uncertainty.....	10
3 20 DB BANDWIDTH.....	11
3.1 Limit.....	11
3.2 Test Configuration	11
3.3 Test Procedure and test setup.....	11
3.4 Test Protocol	12
4 CARRIER FREQUENCY SEPARATION	16
4.1 Test limit	16
4.2 Test Configuration	16
4.3 Test procedure and test setup.....	16
4.4 Test protocol	17
5 MAXIMUM PEAK OUTPUT POWER	21
5.1 Test limit	21
5.2 Test Configuration	21
5.3 Test procedure and test setup.....	21
5.4 Test Protocol	22
6 EMISSION OUTSIDE THE FREQUENCY BAND.....	23
6.1 Test limit	23
6.2 Test Configuration	23
6.3 Test procedure and test setup.....	23
6.4 Test Protocol	24
7 NUMBER OF HOPPING FREQUENCIES.....	36
7.1 Test limit	36
7.2 Test Configuration	36
7.3 Test procedure and test setup.....	36
7.4 Test Protocol	37
8 DWELL TIME	38
8.1 Test limit	38
8.2 Test Configuration	38
8.3 Test procedure and test setup.....	38
8.4 Test Protocol	39
9 RADIATED EMISSIONS IN RESTRICTED FREQUENCY BANDS.....	43
9.1 Test limit	43



- 9.2 Test Configuration43
- 9.3 Test procedure and test setup44
- 9.4 Test Protocol45
- 10 POWER LINE CONDUCTED EMISSION48**
 - 10.1 Limit.....48
 - 10.2 Test configuration48
 - 10.3 Test procedure and test set up49
 - 10.4 Test protocol50
- 11 OCCUPIED BANDWIDTH51**
 - 11.1 Test limit51
 - 11.2 Test Configuration51
 - 11.3 Test procedure and test setup51
 - 11.4 Test protocol52

1 GENERAL INFORMATION

1.1 Description of Client

Applicant : HP Inc.
26, Jiafeng Road, Waigaoqiao Free Trade, Shanghai,
China
Manufacturer : Hong Fu Jin Precision Electronics (Chong Qing) Co.,
Ltd.
No.1 East district 1st Road, Shapingba District, Chong
Qing City, China

1.2 Identification of the EUT

Product Name : HP rokit 130
Type/model : SNPRH-1701
FCC ID : B94SNPRH1701
IC : 466S-SNPRH1701

1.3 Technical Specification

Operation Frequency	: 2400 – 2483.5 MHz
Band	
Protocol	: Bluetooth Base Rate + EDR
Type of Modulation	: GFSK, $\pi/4$ -DQPSK, 8DPSK
Channel Number	: 79 channels
Description of EUT	: EUT is a printer with Bluetooth function. The Bluetooth has three types of modulation. GFSK is different from $\pi/4$ DQPSK and 8DPSK. 8DPSK is similar with $\pi/4$ DQPSK but more complex, and with a bigger data rate. So all the tests were performed with GFSK and 8DPSK modulation as representative. EUT has two alternative power adaptor, all the two adaptor were tested and the worst data was listed in the report.
Antenna	: PCB antenna, 1.46dBi max
Rating	: 110-240V ~, 50/60Hz, Class II
Category of EUT	: Class B
EUT type	: <input checked="" type="checkbox"/> Table top <input type="checkbox"/> Floor standing
Sample received date	: January 04, 2017
Date of test	: January 04, 2017 ~ January 26, 2017

2 TEST SPECIFICATIONS

2.1 Standards or specification

47CFR Part 15 (2014)
RSS-247 Issue 1 (May 2015)
RSS-Gen Issue 4 (December 2014)
ANSI C63.10 (2013)

2.2 Mode of operation during the test

While testing transmitting mode of EUT, the internal modulation and continuously transmission was applied.

The lowest, middle and highest channel were tested as representatives.

Freq. Band (MHz)	Modulation	Lowest (MHz)	Middle (MHz)	Highest (MHz)
2400-2483.5	GFSK	2402	2441	2480
	$\pi/4$ -DQPSK	2402	2441	2480
	8DPSK	2402	2441	2480

2.3 Test software list

Test Items	Software	Manufacturer	Version
Conducted emission	ESxS-K1	R&S	V2.1.0
Radiated emission	ES-K1	R&S	V1.71

2.4 Test peripherals list

Item No.	Name	Band and Model	Description
1	Laptop computer	HP, EliteBook 2530P	-

2.5 Instrument list

Selected	Instrument	EC no.	Model	Valid until date
<input checked="" type="checkbox"/>	Shielded room	EC 2838	GB88	2018-1-8
<input checked="" type="checkbox"/>	EMI test receiver	EC 2107	ESCS 30	2017-10-19
<input checked="" type="checkbox"/>	A.M.N.	EC 3119	ESH2-Z5	2017-12-16
<input type="checkbox"/>	A.M.N.	EC 3394	ENV 216	2017-8-1
<input checked="" type="checkbox"/>	Semi anechoic chamber	EC 3048	-	2017-5-11
<input checked="" type="checkbox"/>	EMI test receiver	EC 3045	ESIB26	2017-10-19
<input checked="" type="checkbox"/>	Broadband antenna	EC 4206	CBL 6112D	2017-4-27
<input checked="" type="checkbox"/>	Horn antenna	EC 3049	HF906	2017-4-27
<input type="checkbox"/>	Horn antenna	EC 4792-1	3117	2017-4-21
<input checked="" type="checkbox"/>	Horn antenna	EC 4792-3	HAP18-26W	2017-6-11
<input type="checkbox"/>	Pre-amplifier	EC 5262	pre-amp 18	2017-5-25
<input checked="" type="checkbox"/>	Pre-amplifier	EC 4792-2	TPA0118-40	2017-4-10
<input type="checkbox"/>	High Pass Filter	EC 4797-1	WHKX 1.0/15G-10SS	2018-1-8
<input checked="" type="checkbox"/>	High Pass Filter	EC 4797-2	WHKX 2.8/18G-12SS	2018-1-8
<input type="checkbox"/>	High Pass Filter	EC 4797-3	WHKX 7.0/1.8G-8SS	2018-1-8
<input checked="" type="checkbox"/>	Band Reject Filter	EC 4797-4	WRCGV2400/2483/10SS	2018-1-8
<input type="checkbox"/>	Test Receiver	EC 4501	ESCI 7	2018-1-13
<input checked="" type="checkbox"/>	PXA Signal Analyzer	EC5338	N9030A	2017-5-14
<input checked="" type="checkbox"/>	Power sensor/Power meter	EC4318	N1911A/N1921A	2017-4-8
<input type="checkbox"/>	Power sensor	EC5338-1	U2021XA	2017-3-5
<input type="checkbox"/>	MXG Analog Signal Generator	EC5338-2	N5181A	2017-3-5
<input type="checkbox"/>	MXG Vector Signal Generator	EC5175	N51812B	2018-1-8

2.6 Test Summary

This report applies to tested sample only. The test results have been compared directly with the limits, and the measurement uncertainty is recorded. This report shall not be reproduced in part without written approval of Intertek Testing Service Shanghai Limited.

TEST ITEM	FCC REFERANCE	IC REFERANCE	RESULT
20 dB Bandwidth	15.247(a)(1)	RSS-247 Issue 1 Clause 5.1	Tested
Carrier Frequency Separation	15.247(a)(1)	RSS-247 Issue 1 Clause 5.1	Pass
Maximum peak output power	15.247(b)(1)	RSS-247 Issue 1 Clause 5.4	Pass
Radiated Emissions in restricted frequency bands	15.205 & 15.209	RSS-Gen Issue 4 Clause 8.9	Pass
Emission outside the frequency band	15.247(d)	RSS-247 Issue 1 Clause 5.5	Pass
Number of Hopping Frequencies	15.247(a)(1)(iii)	RSS-247 Issue 1 Clause 5.1	Pass
Dwell time	15.247(a)(1)(iii)	RSS-247 Issue 1 Clause 5.1	Pass
Power line conducted emission	15.207	RSS-Gen Issue 4 Clause 8.8	Pass
Occupied bandwidth	-	RSS-Gen Issue 4 Clause 6.6	Tested

Notes: 1: NA =Not Applicable

2: This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

2.7 Measurement uncertainty

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

TEST ITEM	MEASUREMENT UNCERTAINTY
Maximum peak output power	$\pm 0.74\text{dB}$
Radiated Emissions in restricted frequency bands below 1GHz	$\pm 4.90\text{dB}$
Radiated Emissions in restricted frequency bands above 1GHz	$\pm 5.02\text{dB}$
Emission outside the frequency band	$\pm 2.89\text{dB}$
Power line conducted emission	$\pm 3.19\text{dB}$

3 20 dB Bandwidth


Test result: Pass

3.1 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

3.2 Test Configuration

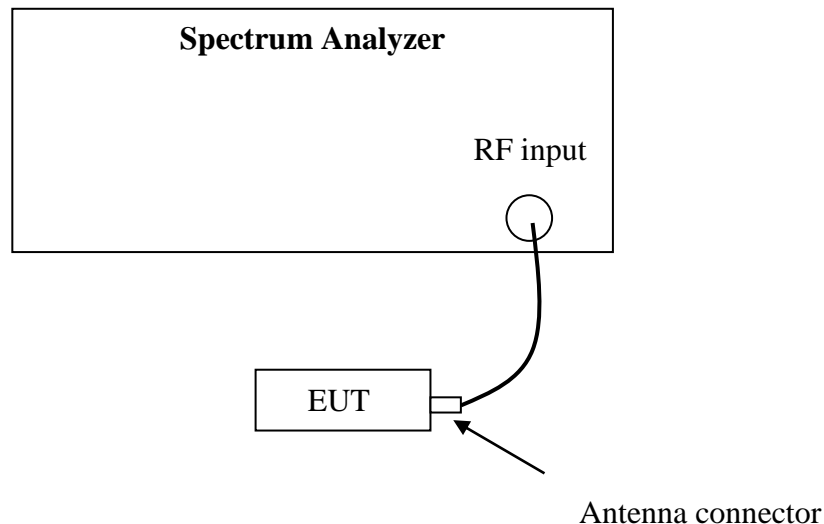

3.3 Test Procedure and test setup

The 20 bandwidth per FCC § 15.247(a)(1) is measured using the Spectrum Analyzer with Span = 2 to 3 times the 20 dB bandwidth, $RBW \geq 1\%$ of the 20 dB bandwidth, $VBW \geq RBW$, Sweep = auto, Detector = peak, Trace = max hold.

The test was performed at 3 channels (lowest, middle and highest channel).


The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems)

3.4 Test Protocol

Temperature: 22°C
Relative Humidity: 54%

Modulation	Channel	20dB Bandwidth (kHz)	Two-thirds of Bandwidth (kHz)
GFSK	L	946.7	631.13
	M	944.6	629.73
	H	945.0	630.00

Channel L

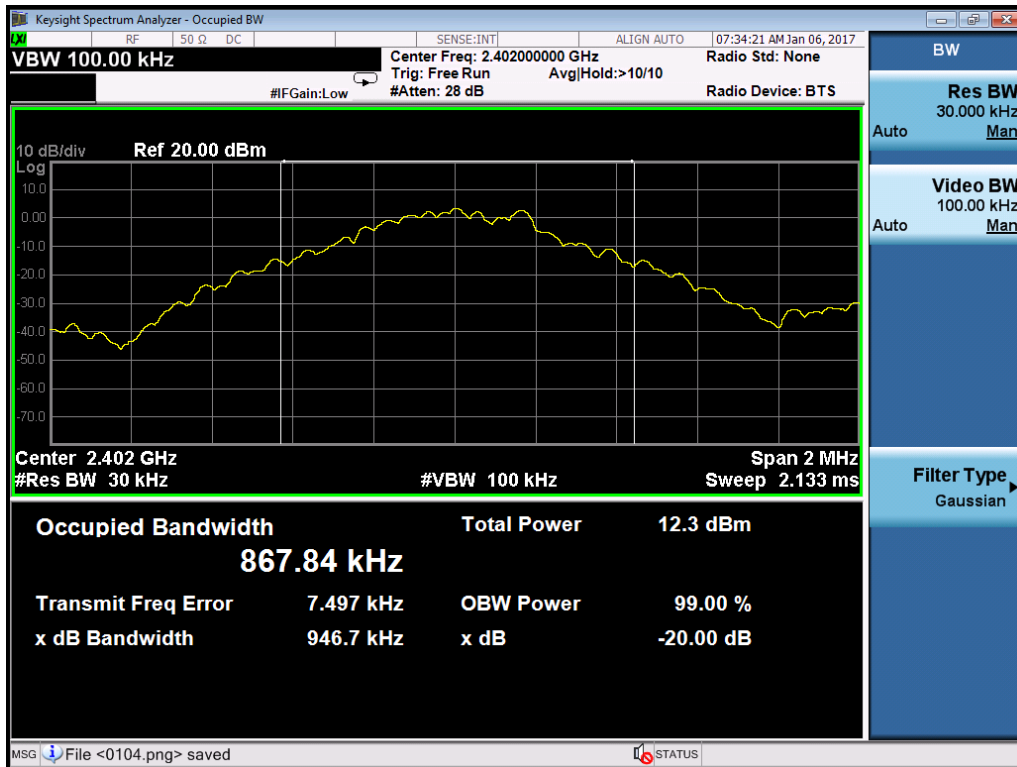

Channel M




Channel H




Modulation	Channel	20dB Bandwidth (kHz)	Two-thirds of Bandwidth (kHz)
8DPSK	L	1258	838.67
	M	1259	839.33
	H	1257	838.00

Channel L

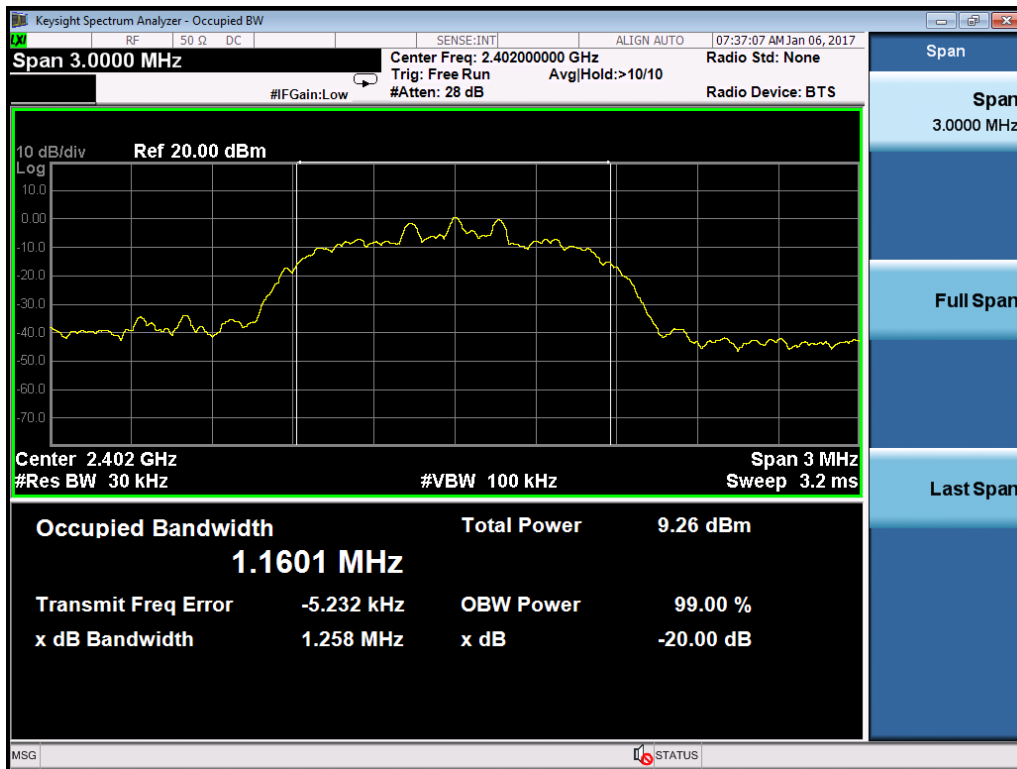

Channel M

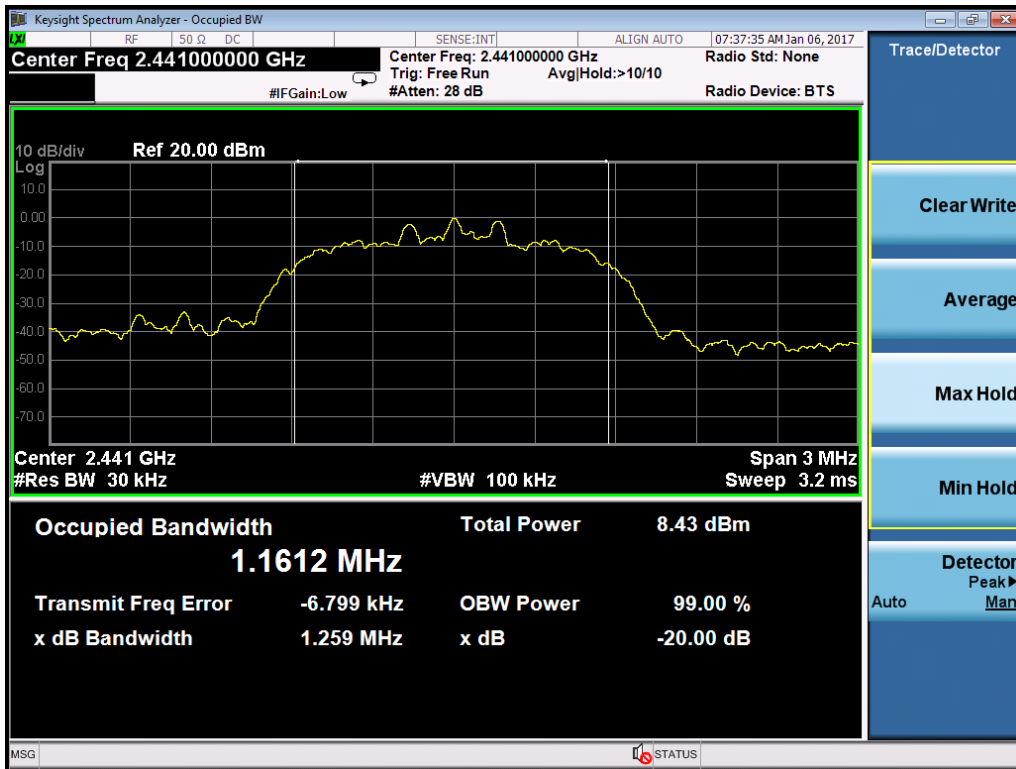

Channel H



4 Carrier Frequency Separation


Test result: Pass

4.1 Test limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

4.2 Test Configuration

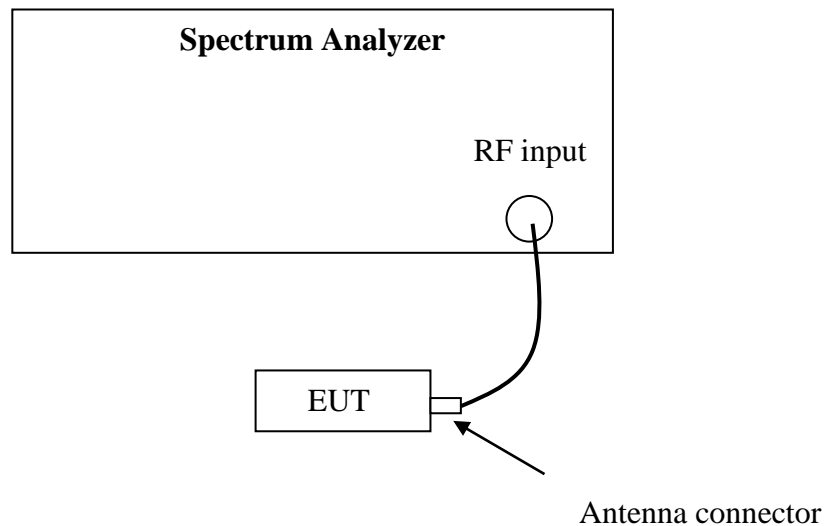

4.3 Test procedure and test setup

The Carrier Frequency Separation per FCC § 15.247(a)(1) is measured using the Spectrum Analyzer with Span can capture two adjacent channels, $RBW \geq 1\%$ of the span, $VBW \geq RBW$, Sweep = auto, Detector = peak, Trace = max hold.

The test was performed at 3 channels (lowest, middle and highest channel).


The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems)

4.4 Test protocol


Temperature: 22 °C
Relative Humidity: 54 %

Modulation	Channel	Frequency Separation (kHz)	Limit (kHz)
GFSK	L	1004	≥ 631.13
	M	996	≥ 629.73
	H	980	≥ 630.00

Channel L

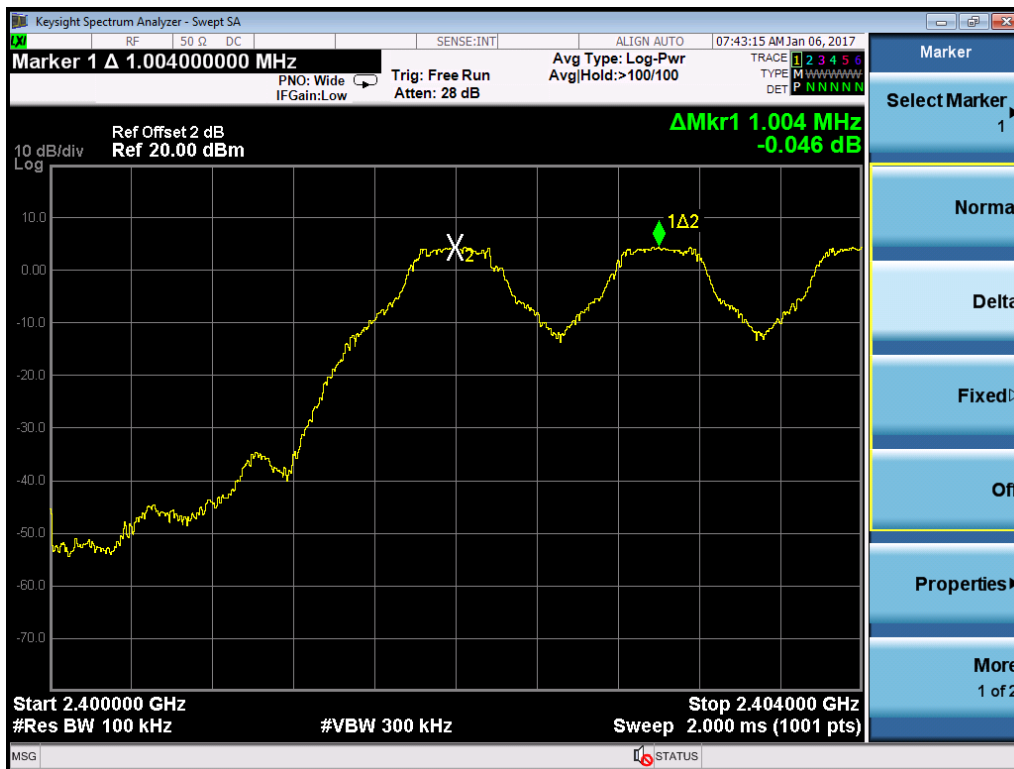

Channel M

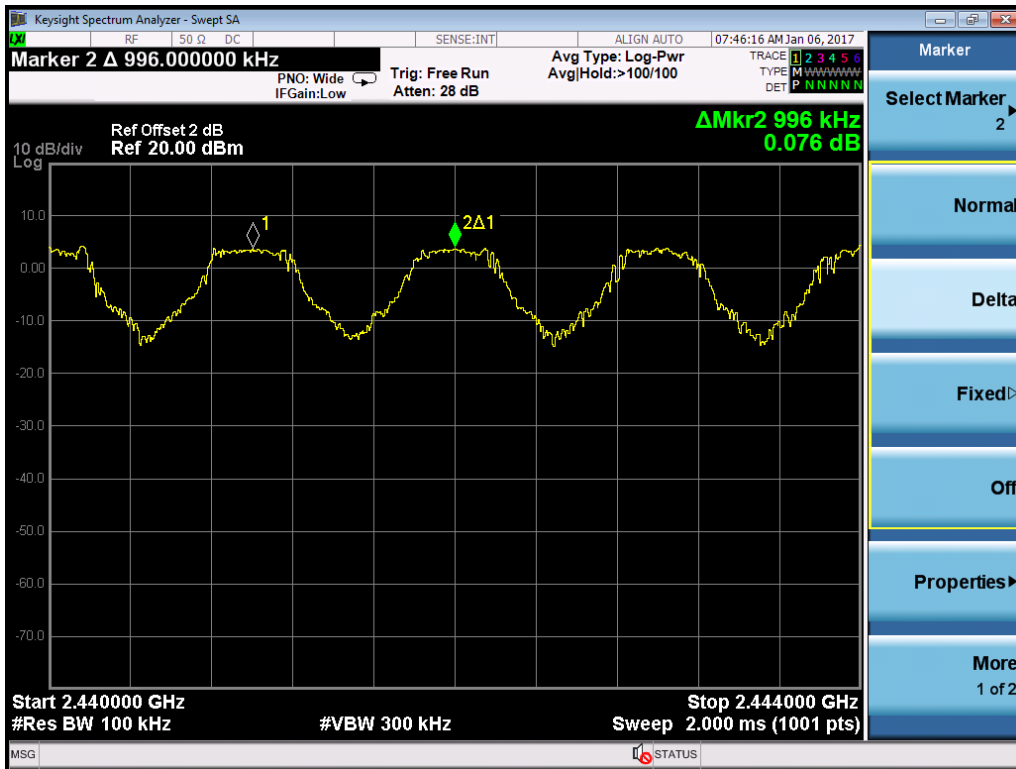

Channel H




Modulation	Channel	Frequency Separation (kHz)	Limit (kHz)
8DPSK	L	1012	≥ 838.67
	M	1020	≥ 839.33
	H	1004	≥ 838.00

Channel L



Channel M

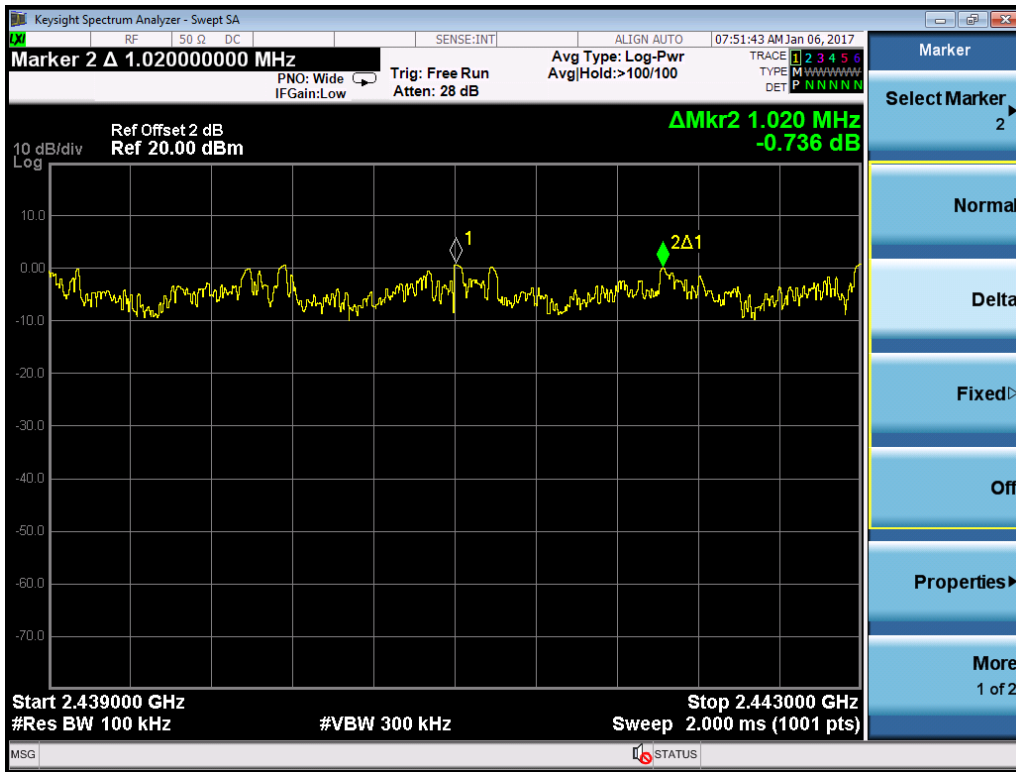

Channel H



5 Maximum peak output power

Test result: Pass

5.1 Test limit


For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt

For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts

If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.

5.2 Test Configuration

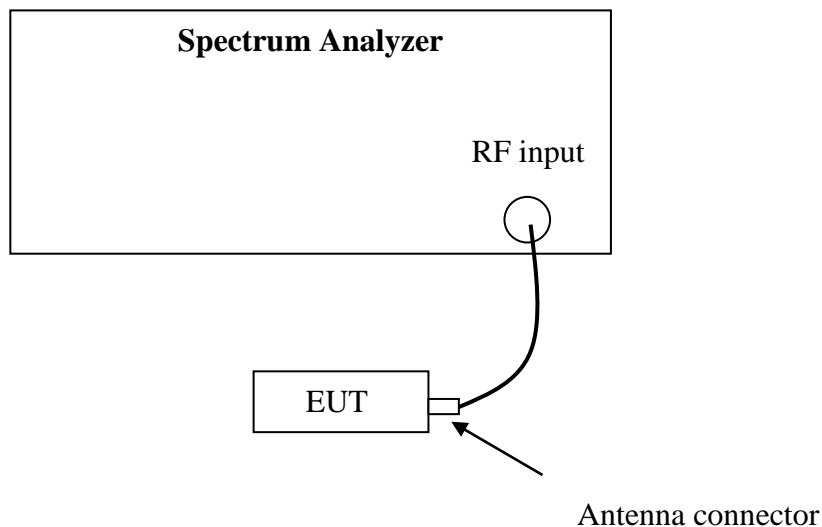

5.3 Test procedure and test setup

The Maximum peak output power per FCC § 15.247(b) is measured using the Spectrum Analyzer with Span = 5 times the 20 dB bandwidth, RBW \geq the 20 dB bandwidth, VBW \geq RBW, Sweep = auto, Detector = peak, Trace = max hold.

The test was performed at 3 channels (lowest, middle and highest channel).

The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems)

5.4 Test Protocol

Temperature: 22°C
Relative Humidity: 54%

Modulation	Channel	Conducted Power (dBm)	Limit (dBm)
GFSK	L	5.15	≤ 21.00
	M	4.45	≤ 21.00
	H	6.09	≤ 21.00

Modulation	Channel	Conducted Power (dBm)	Limit (dBm)
8DPSK	L	3.05	≤ 21.00
	M	2.35	≤ 21.00
	H	4.02	≤ 21.00

Conclusion: The maximum EIRP = 6.09dBm+1.46dBi = 5.69mW which is lower than the limit of 4W listed in RSS-247.


6 Emission outside the frequency band

Test result: Pass

6.1 Test limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

6.2 Test Configuration

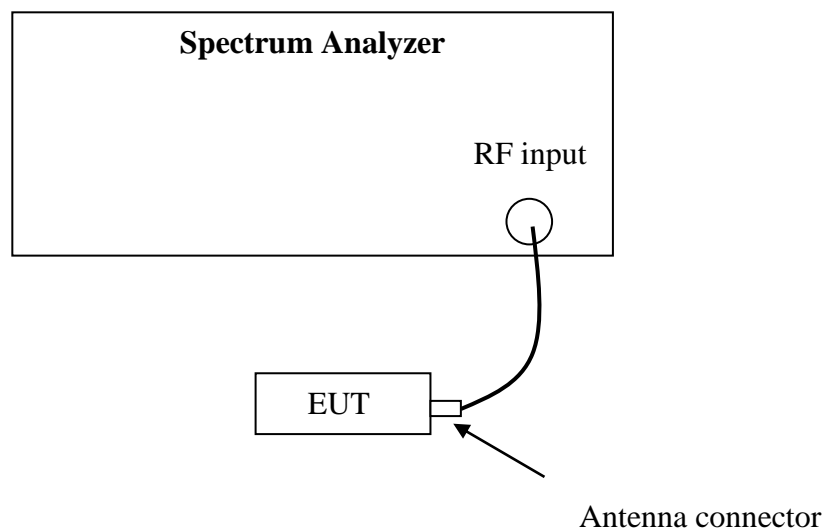

6.3 Test procedure and test setup


The Emission outside the frequency band per FCC § 15.247(d) is measured using the Spectrum Analyzer with Span wide enough capturing all spurious from the lowest emission frequency of the EUT up to 10th harmonics, RBW = 100kHz, VBW \geq RBW, Sweep = auto, Detector = peak, Trace = max hold. The test was performed at 3 channels (lowest, middle and highest channel). The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems)



6.4 Test Protocol

Temperature: 22°C
Relative Humidity: 54%



Modulation	Channel	Result	Limit (dBm)
GFSK	L	Pass	≥20
	M	Pass	≥20
	H	Pass	≥20
	Hopping	Pass	≥20


Channel L

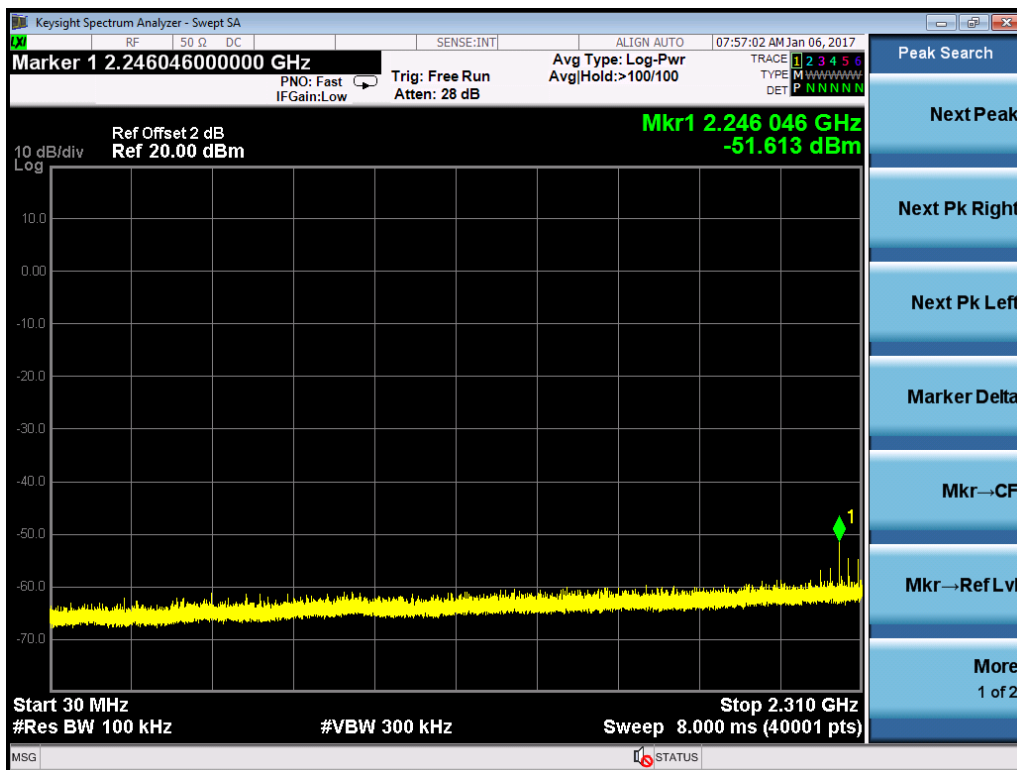

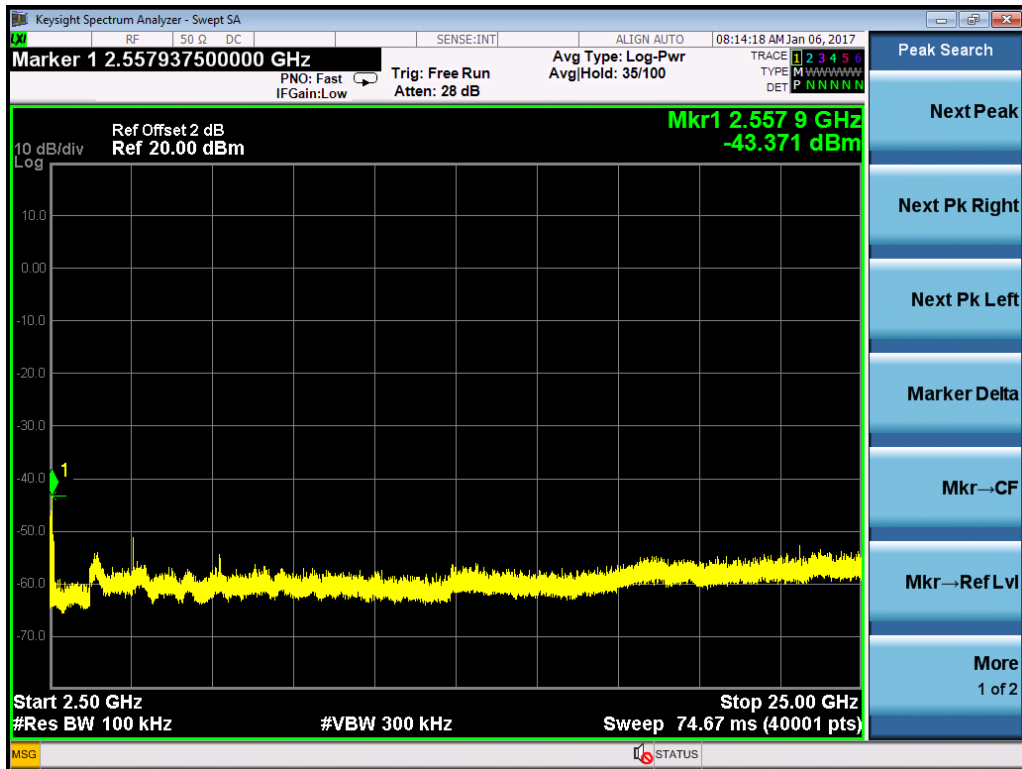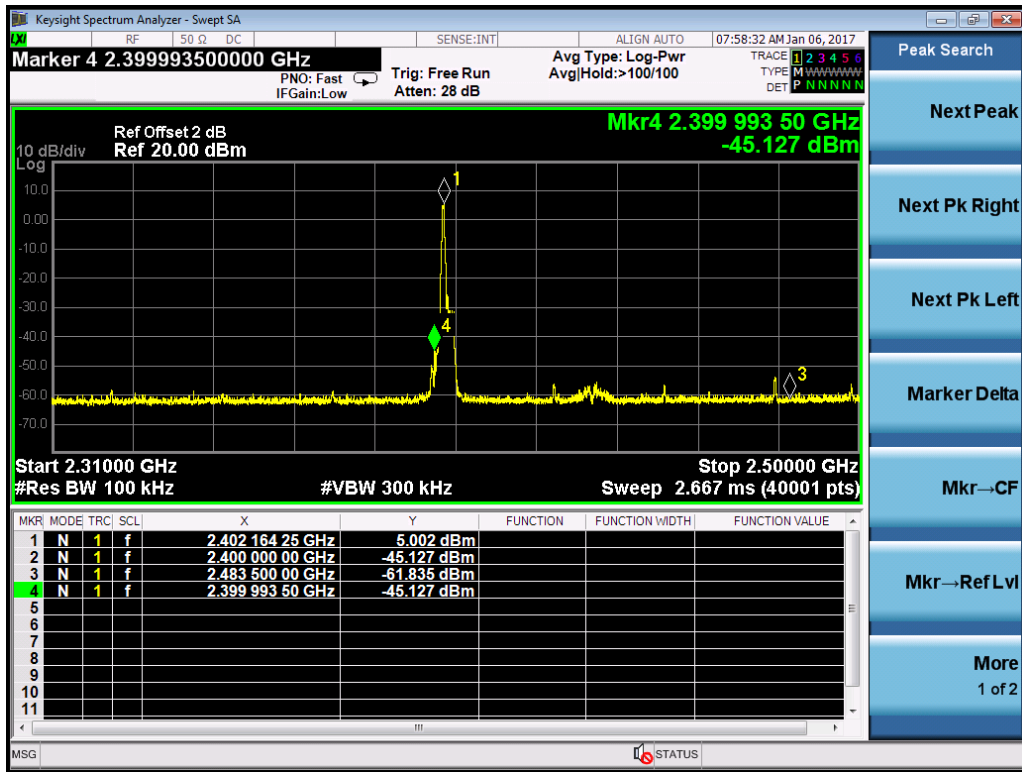




Channel M

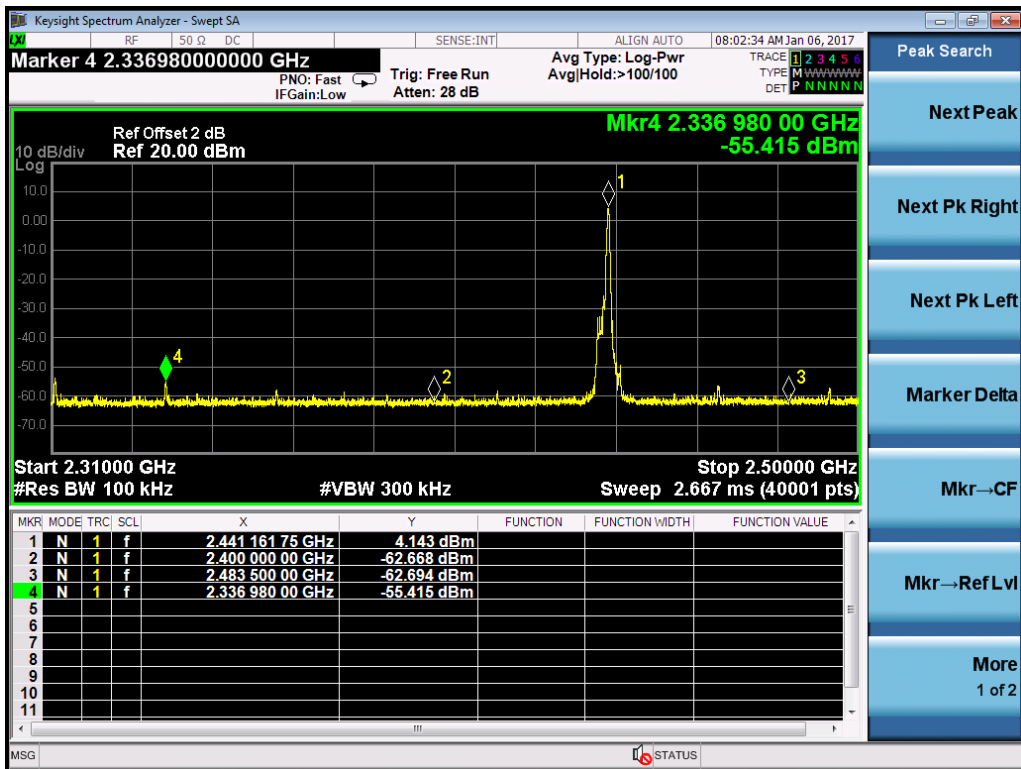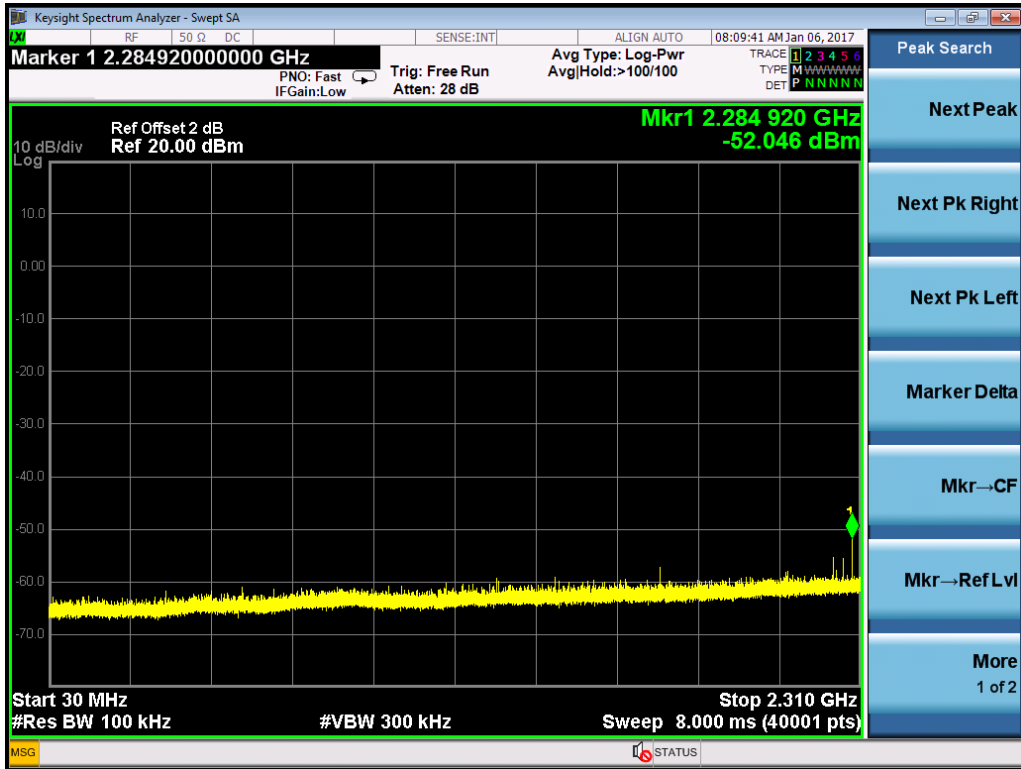

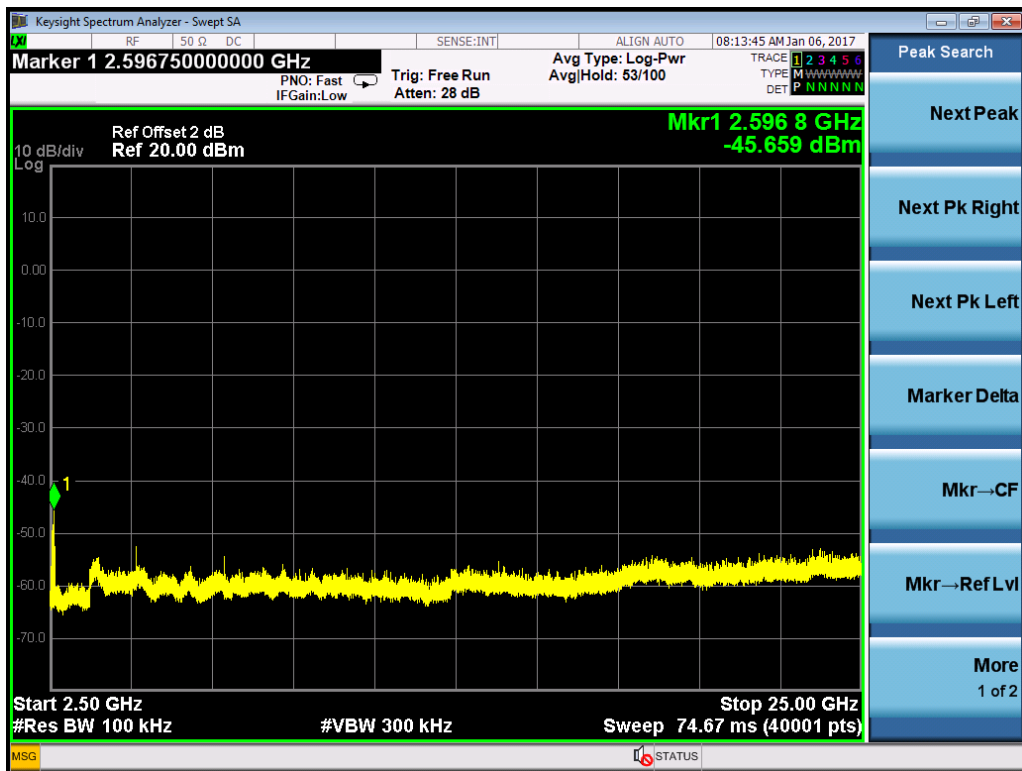


Channel H

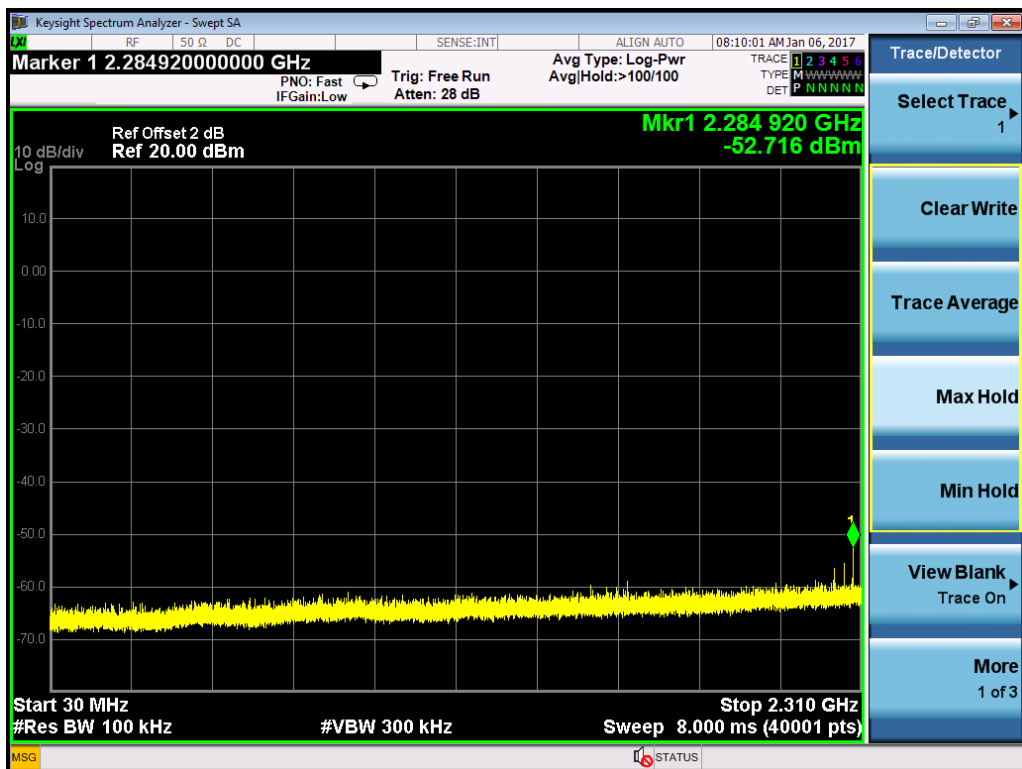

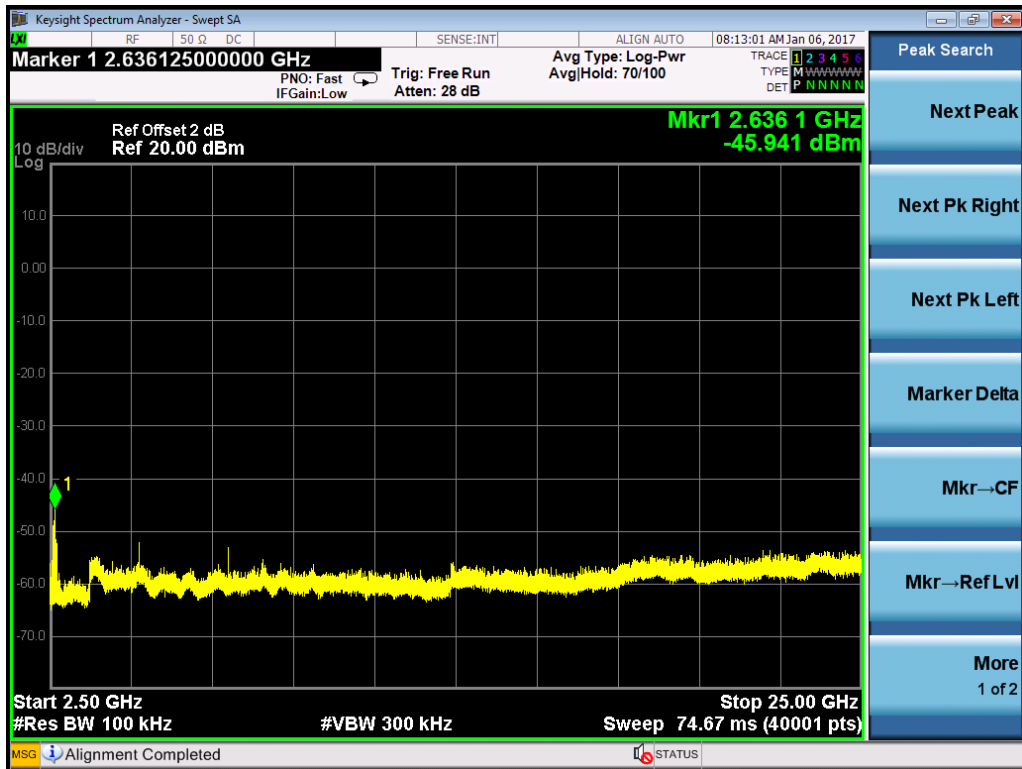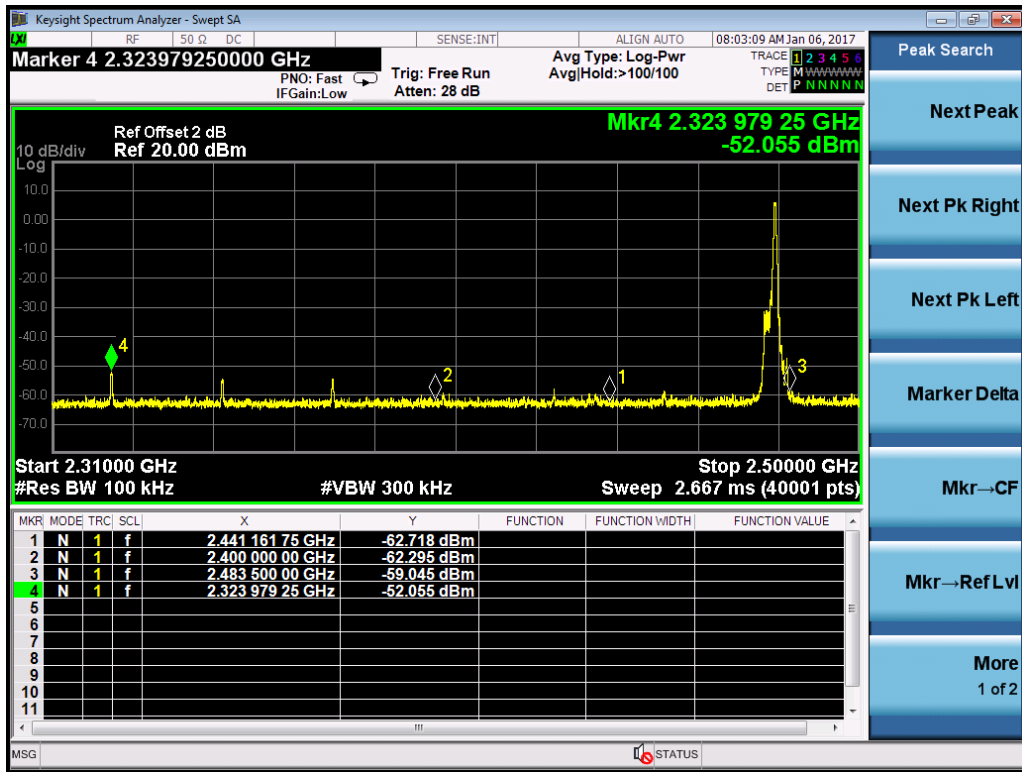




Hopping

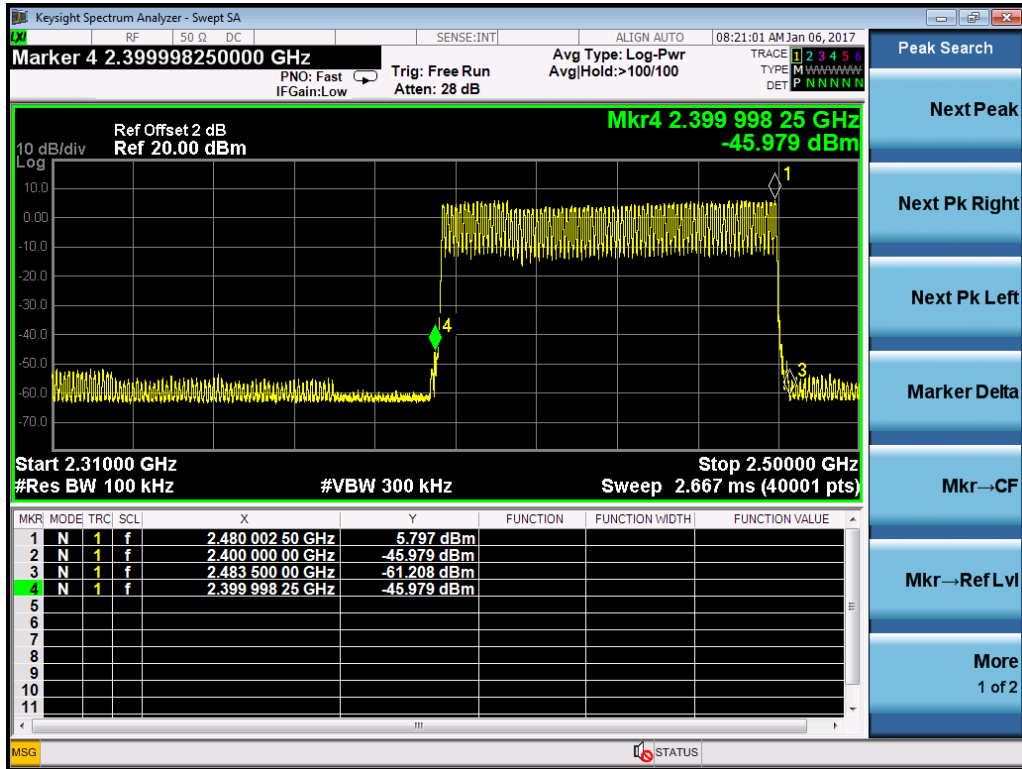



Modulation	Channel	Result	Limit (dBm)
8DPSK	L	Pass	≥ 20
	M	Pass	≥ 20
	H	Pass	≥ 20
	Hopping	Pass	≥ 20


Channel L

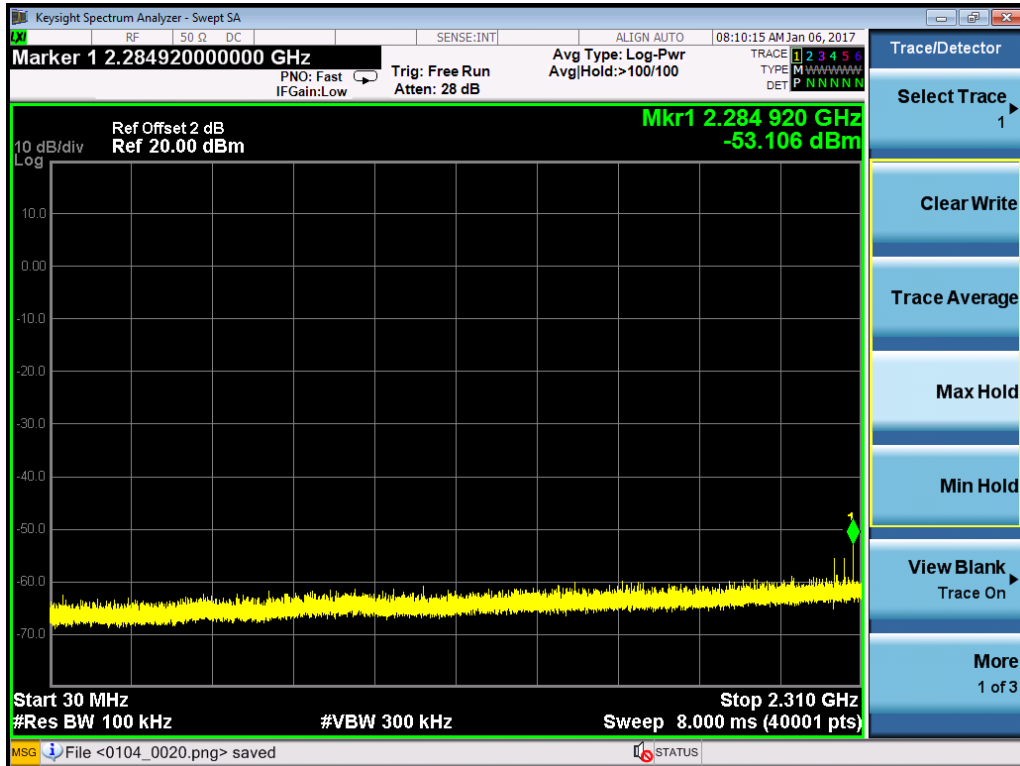

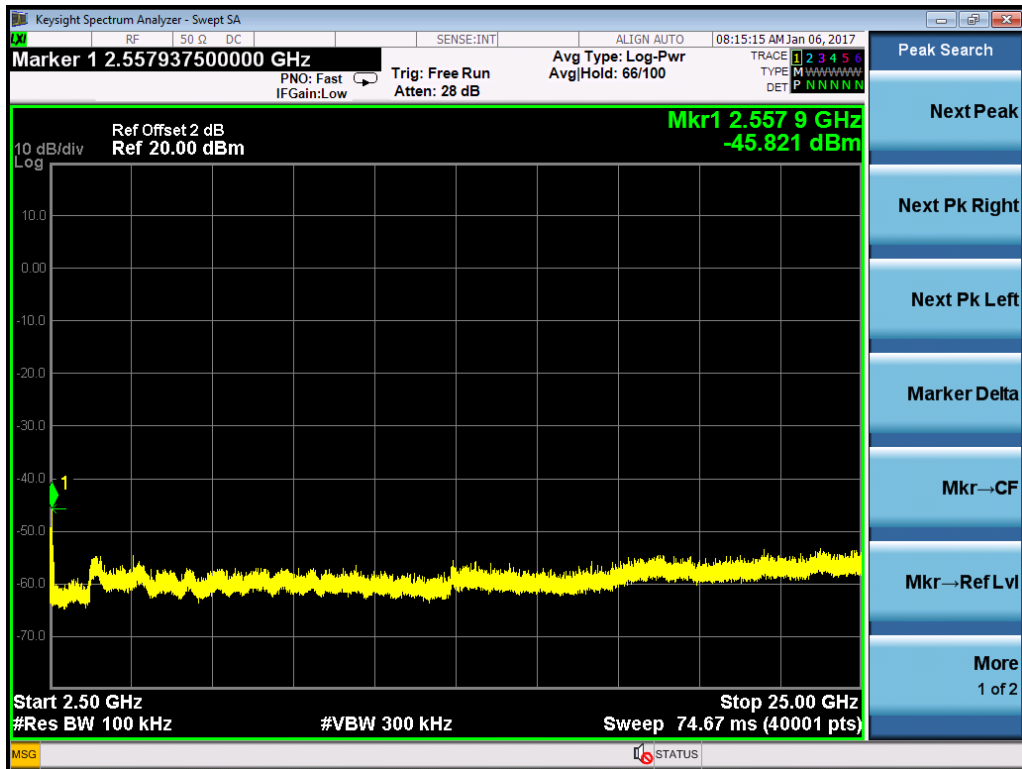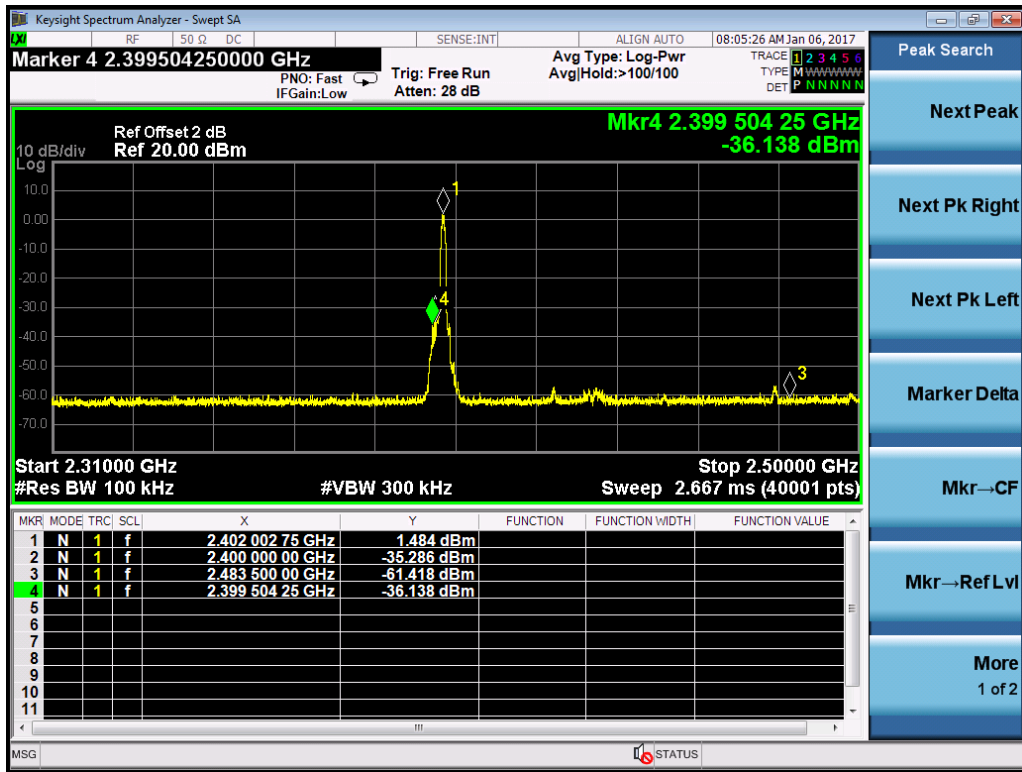




Channel M

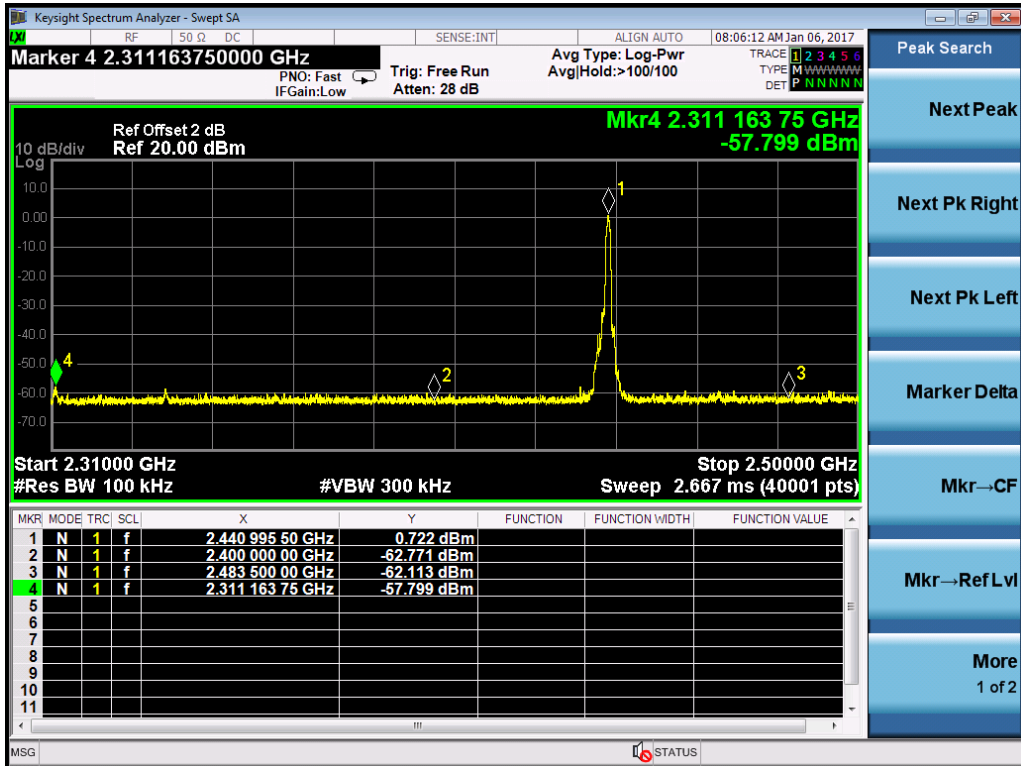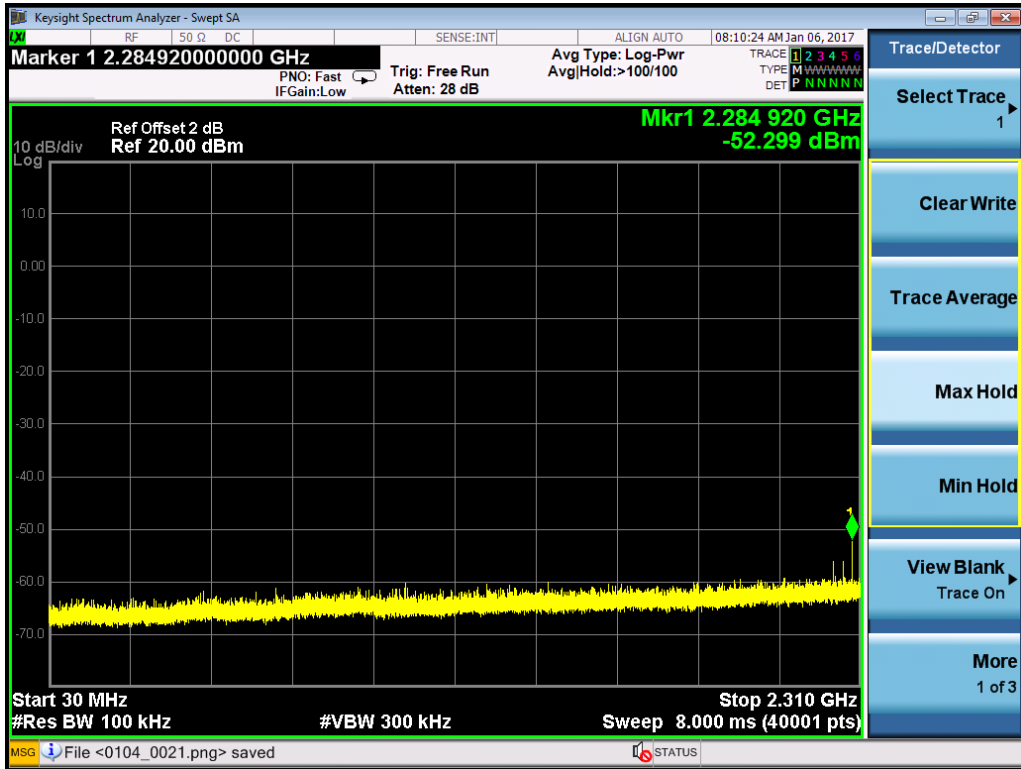

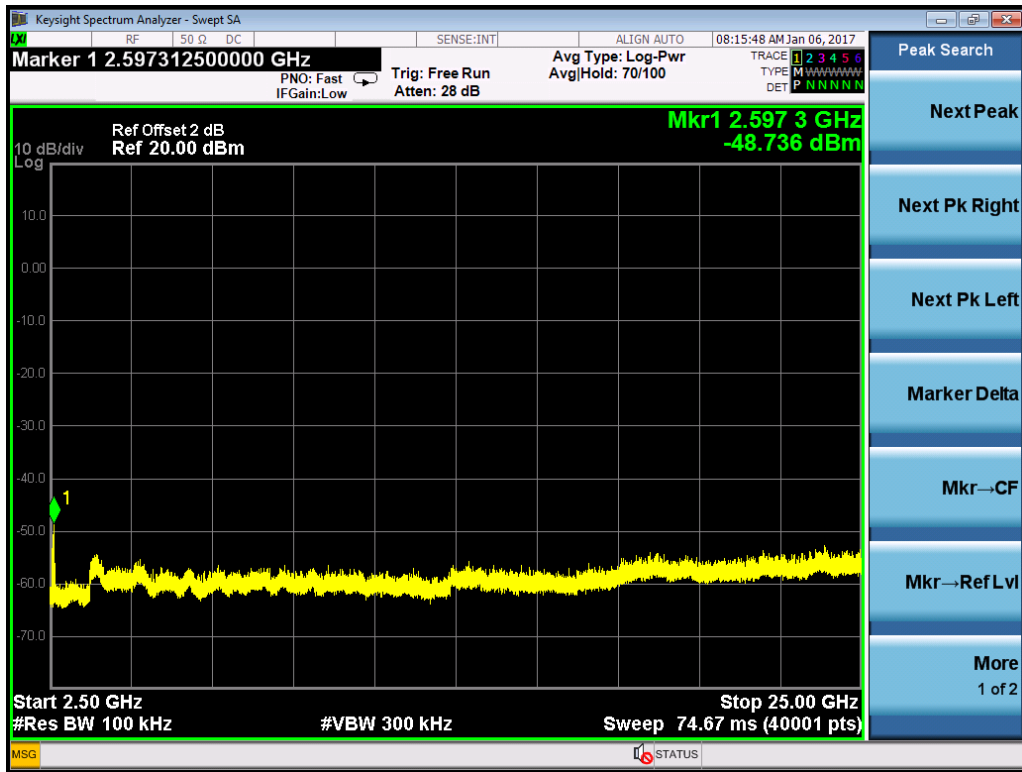


Channel H

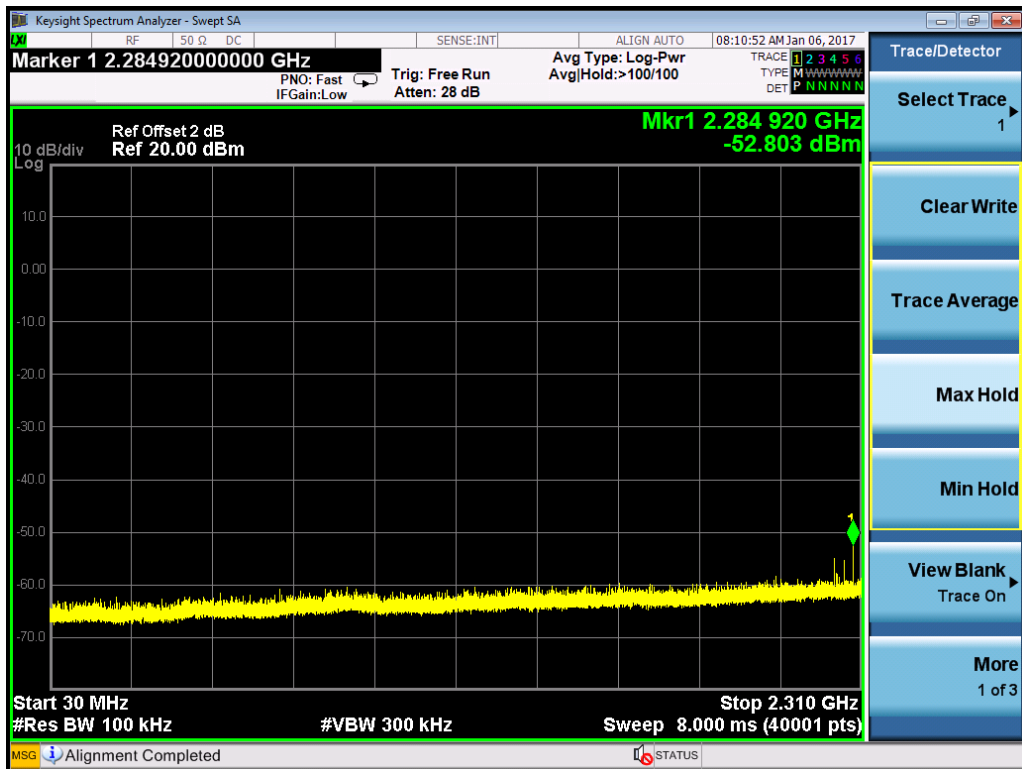

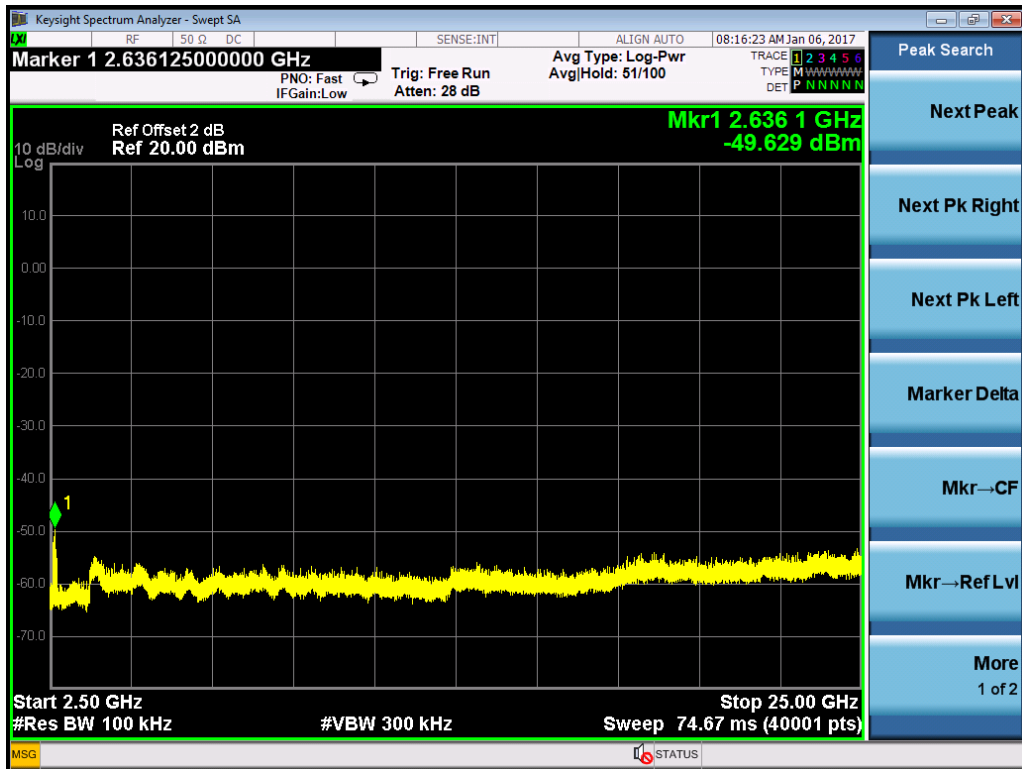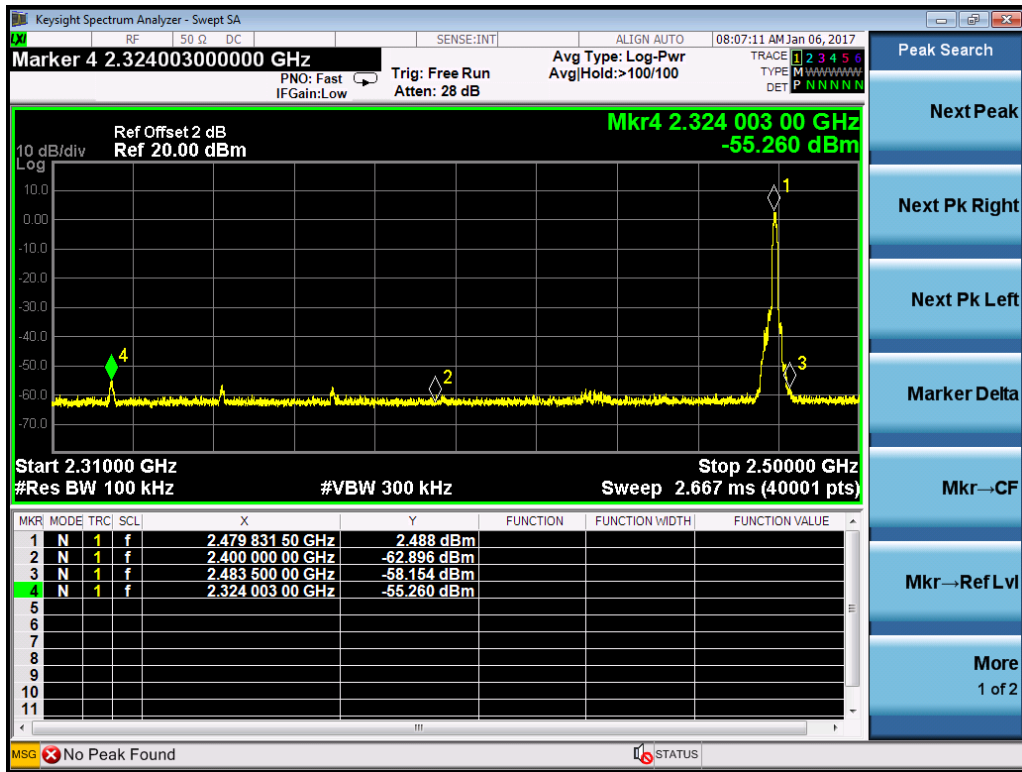

Hopping

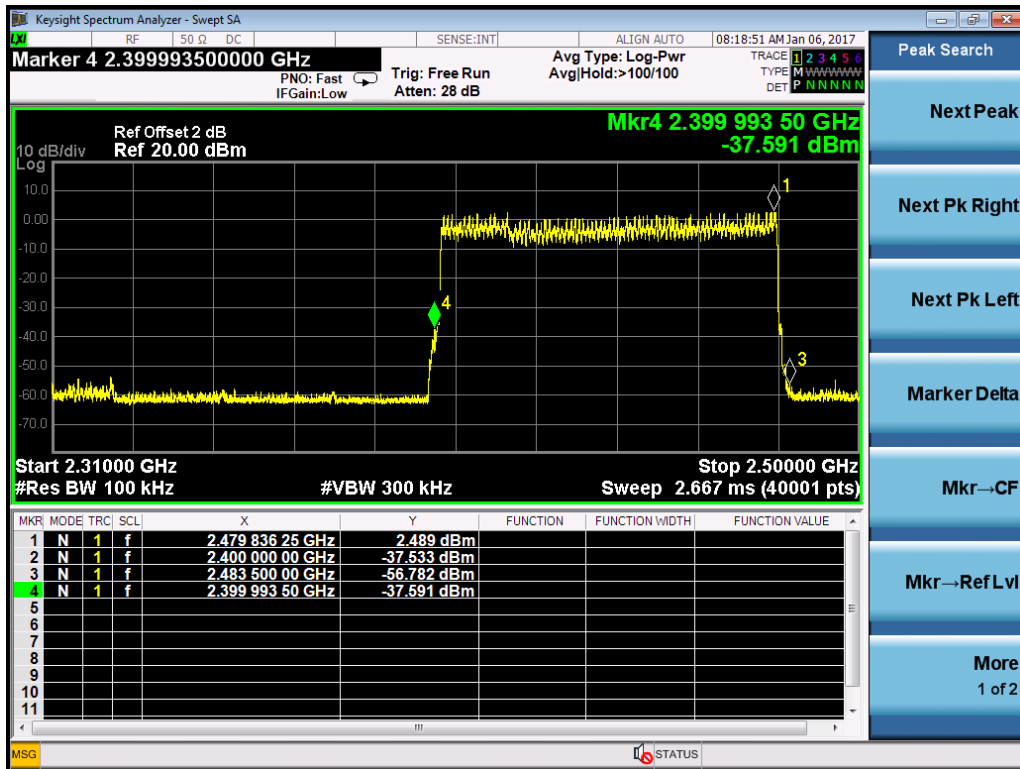


7 Number of Hopping Frequencies

Test result: Pass

7.1 Test limit

Number of Hopping Frequencies in the 2400-2483.5 MHz band shall use at least 15 channels.

7.2 Test Configuration

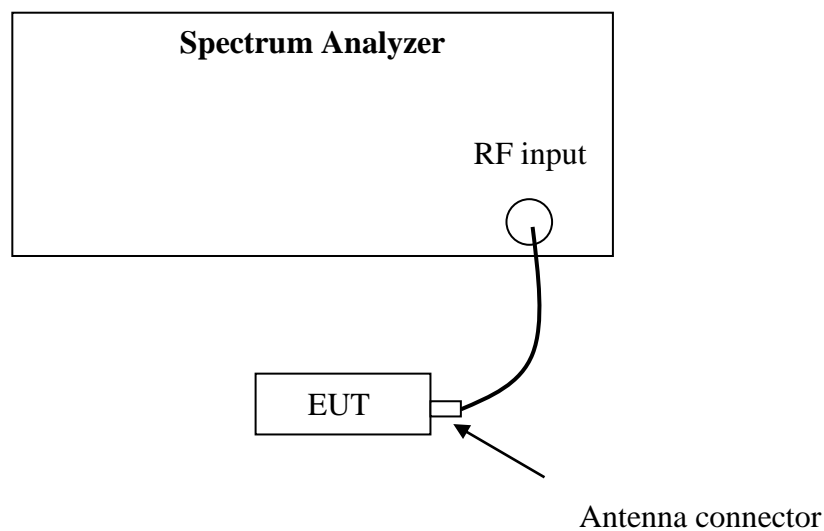

7.3 Test procedure and test setup


The Number of Hopping Frequencies per FCC § 15.247(a)(1)(iii) is measured using the Spectrum Analyzer with RBW=100kHz, VBW \geq RBW, Sweep = auto, Detector = peak, Trace = max hold.

The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems).

7.4 Test Protocol

Temperature: 22°C
Relative Humidity: 54%

Number of Hopping Frequencies	Limit
79	≥15

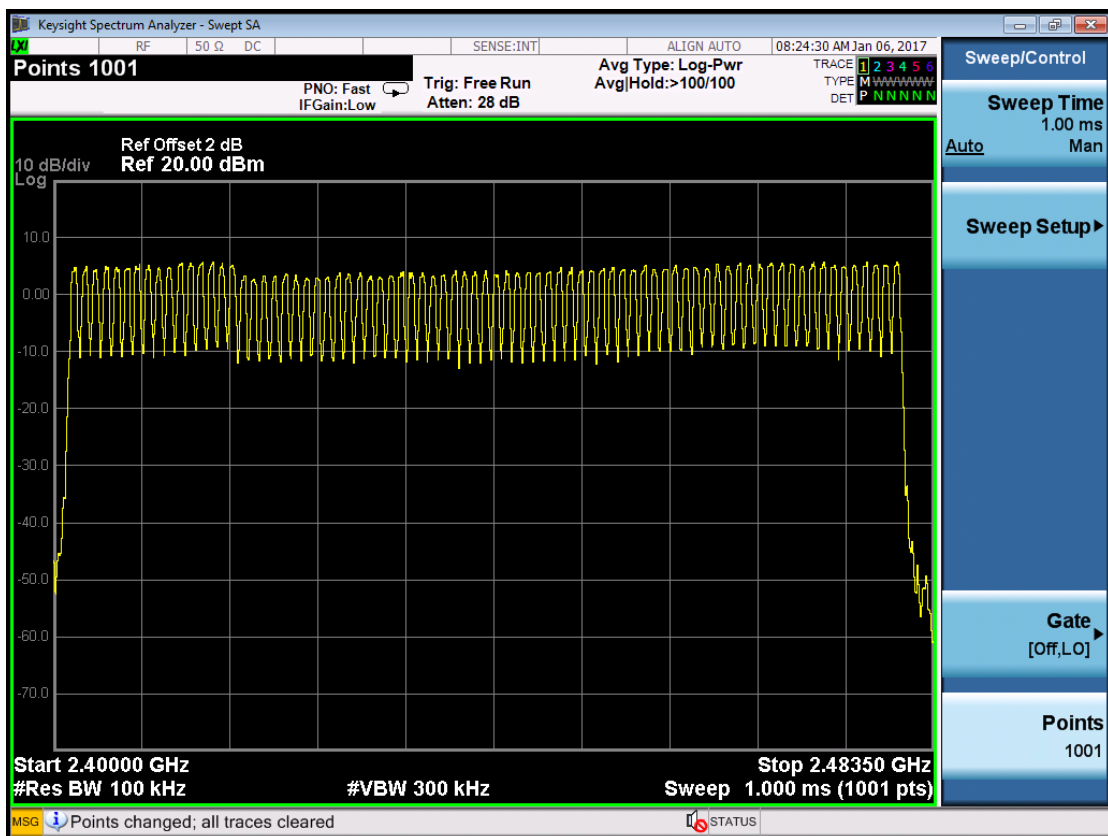


8 Dwell Time

Test result: Pass

8.1 Test limit

The dwell time on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

8.2 Test Configuration

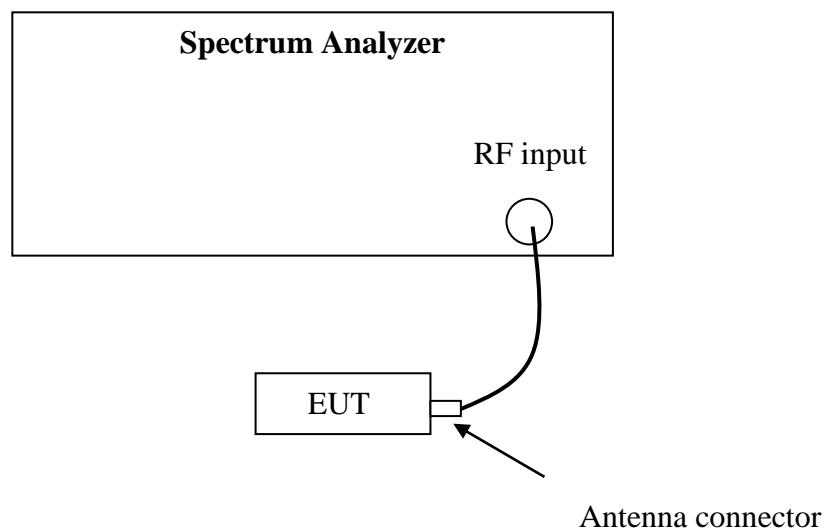

8.3 Test procedure and test setup

Dwell time per FCC § 15.247(a)(1)(iii) is measured using the Spectrum Analyzer with Span = 0, RBW=1MHz, VBW \geq RBW, Sweep can capture the entire dwell time, Detector = peak, Trace = max hold. The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems).

8.4 Test Protocol



Temperature: 22°C
Relative Humidity: 54%

Packet	Occupancy time for single hop (ms) O	Channel	Real observed period (s) P	Hops among Observed period I	Dwell time (ms) T	Limit (s)
DH1	0.414	L	3.16	32	132.48	≤0.4
		M	3.16	32	132.48	
		H	3.16	32	132.48	
DH3	1.669	L	3.16	16	267.04	
		M	3.16	16	267.04	
		H	3.16	16	267.04	
DH5	2.919	L	3.16	11	321.09	
		M	3.16	11	321.09	
		H	3.16	11	321.09	



Remark: 1. There are 79 channels in all. So the complete observed period $P = 0.4 * 79 = 31.6$ s.

2. Average time of occupancy $T = O * I * 31.6 / P$



DH1

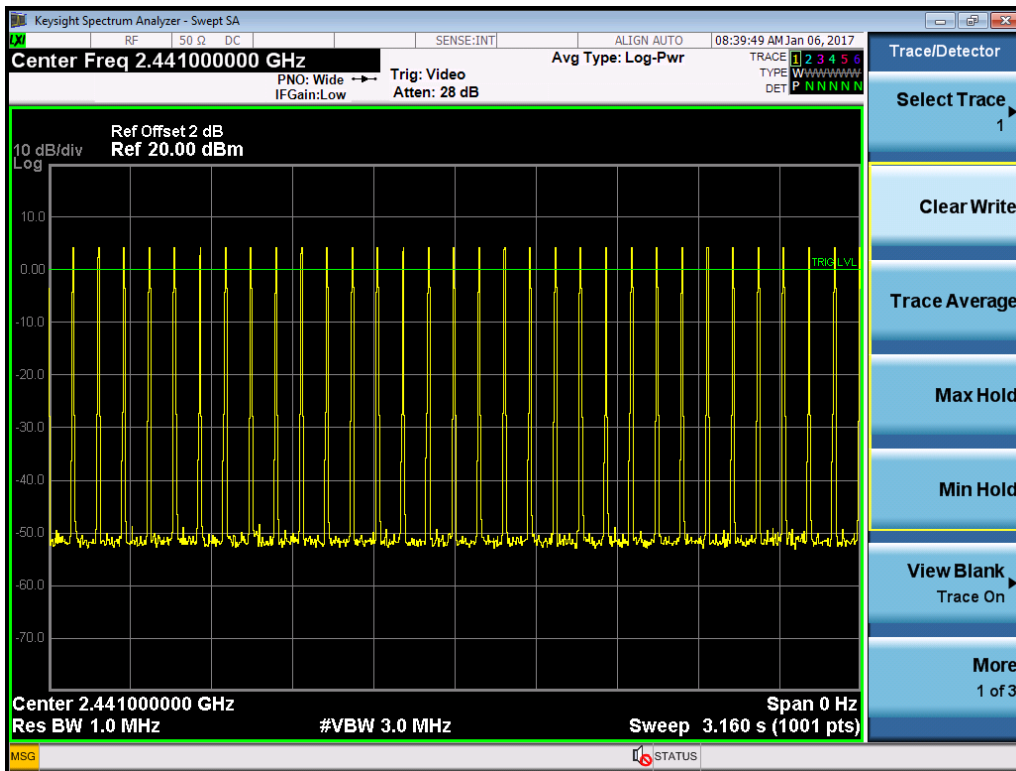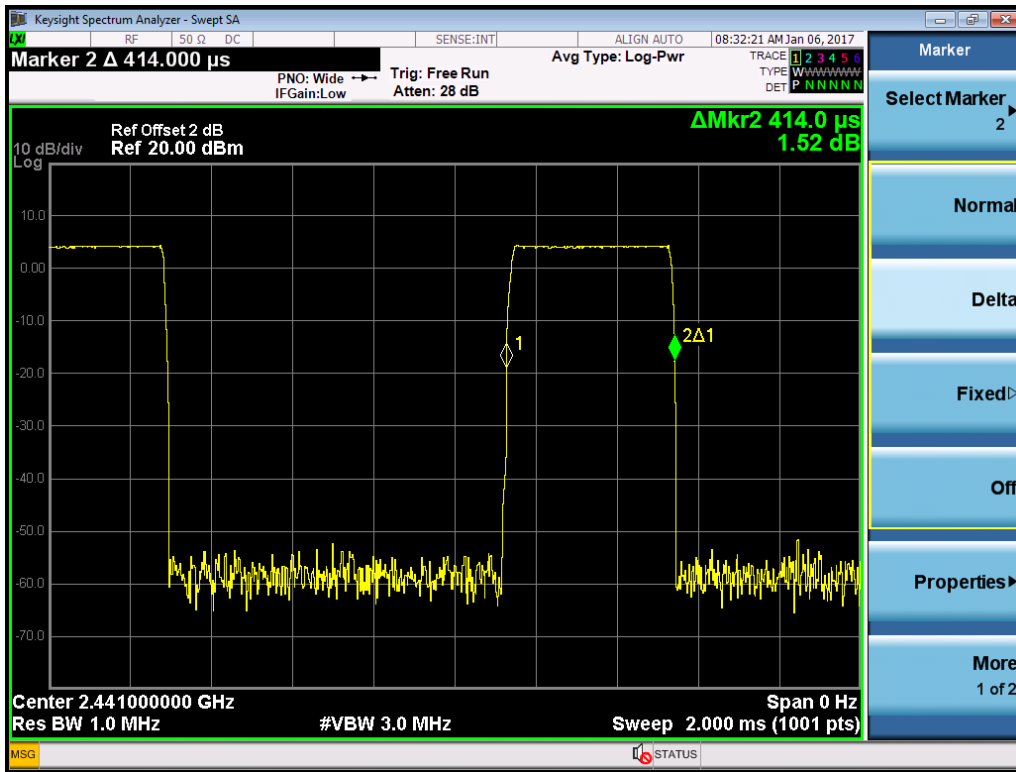

DH3

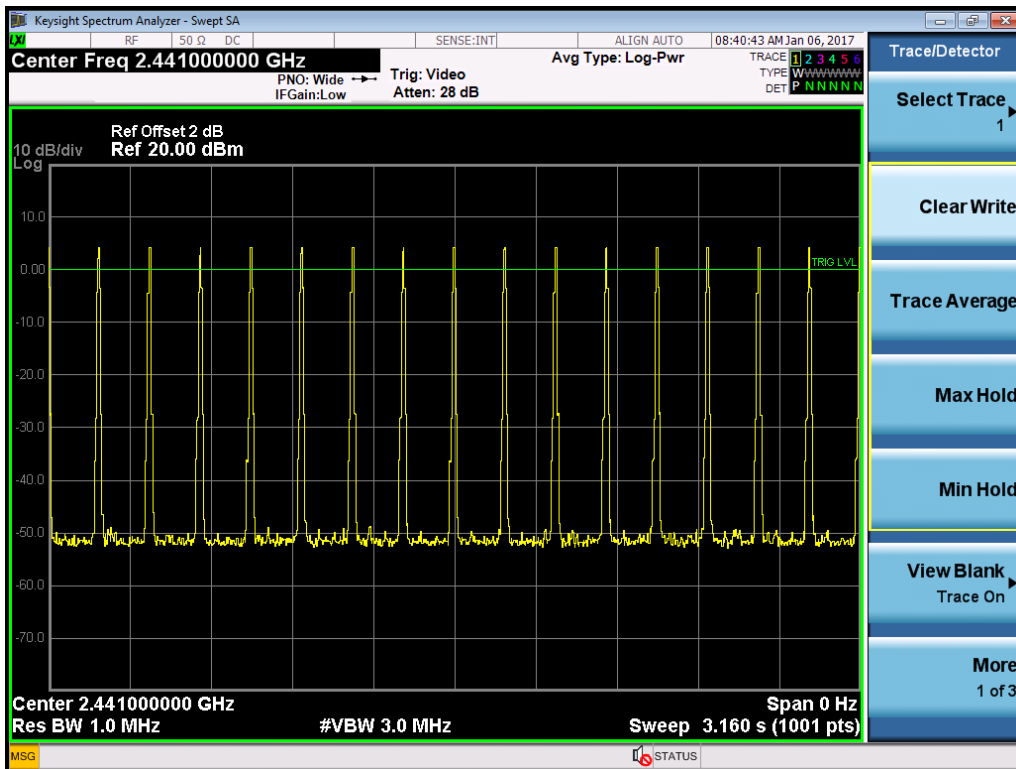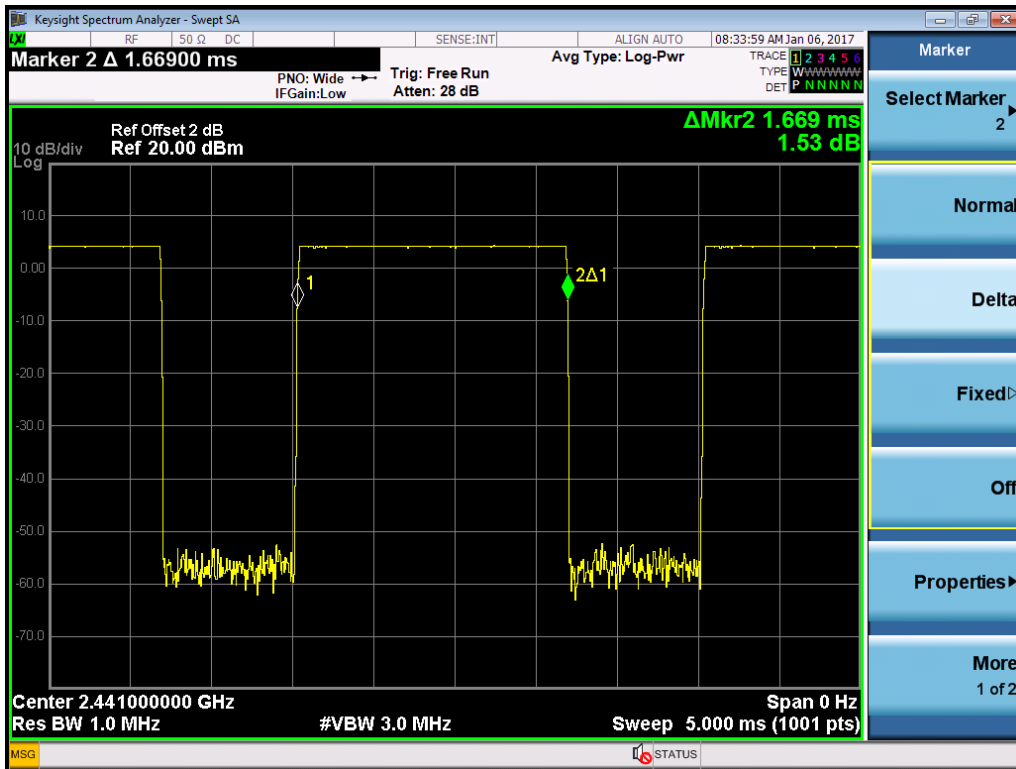

DH5

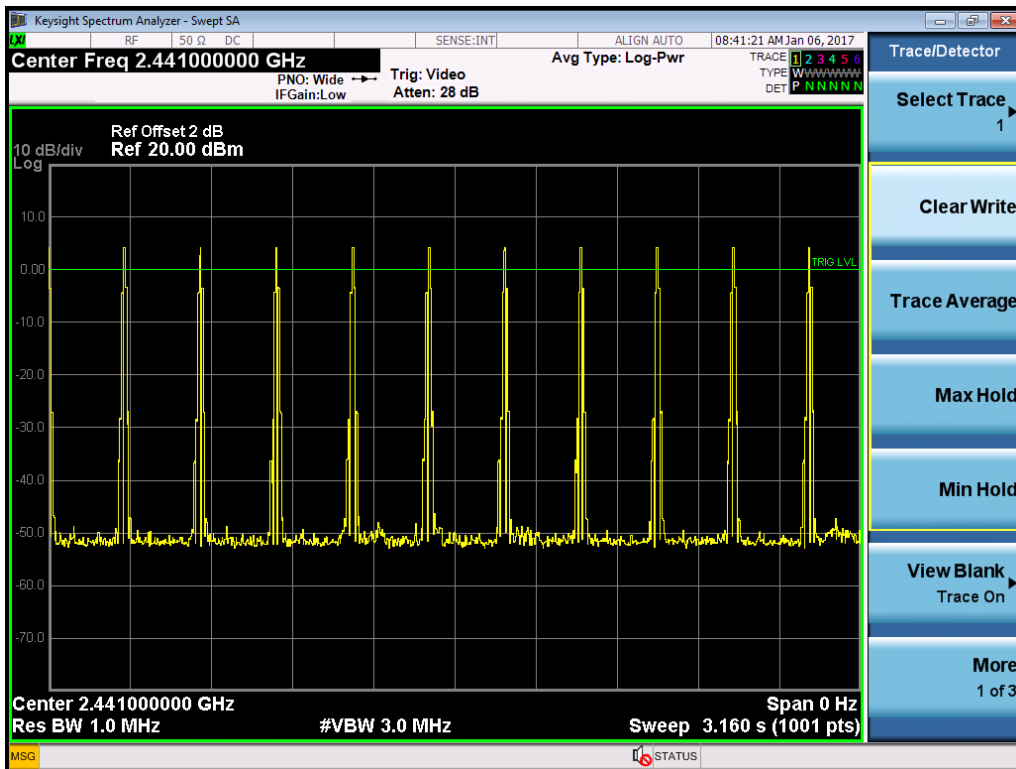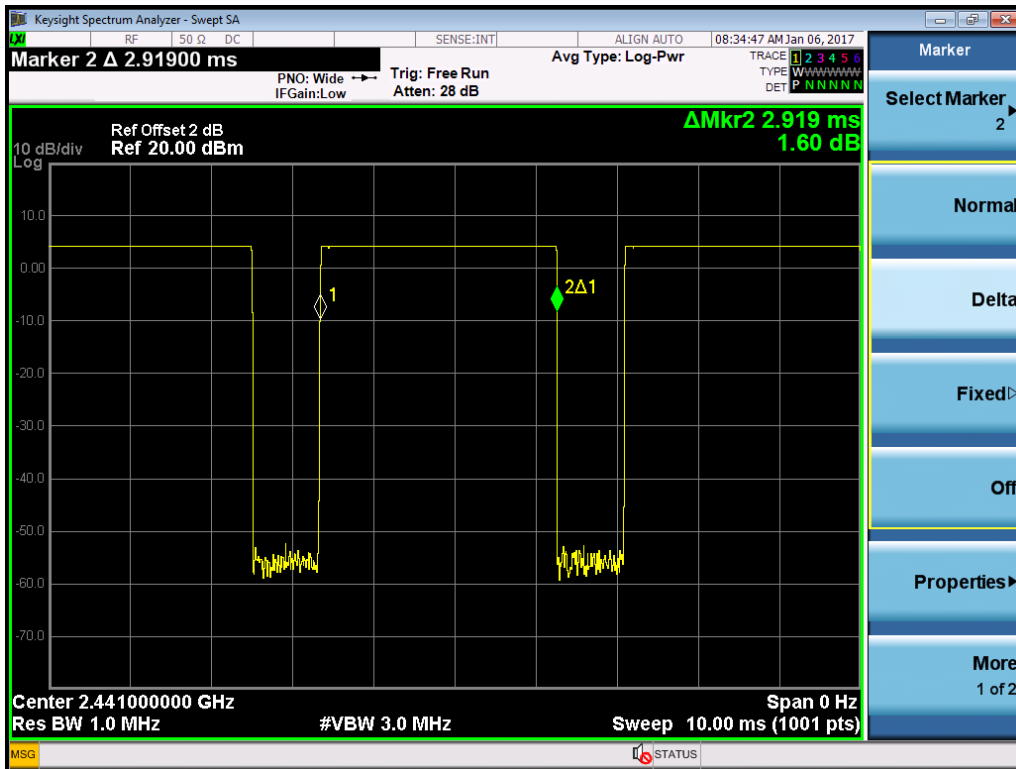

9 Radiated Emissions in restricted frequency bands


Test result: Pass

9.1 Test limit

The radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) showed as below:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

9.2 Test Configuration

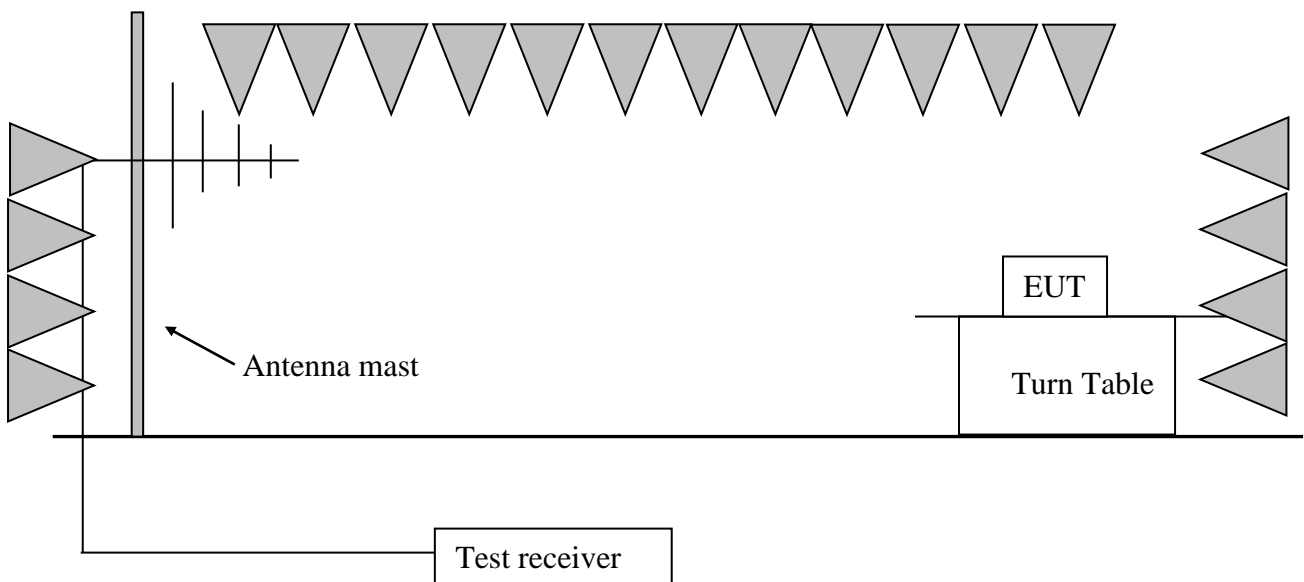

9.3 Test procedure and test setup

The measurement was applied in a semi-anechoic chamber. While testing for spurious emission higher than 1GHz, if applied, the pre-amplifier would be equipped just at the output terminal of the antenna.

Tabletop devices shall be placed on a nonconducting platform with nominal top surface dimensions 1 m by 1.5 m. For emissions testing at or below 1 GHz, the table height shall be 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m.

The turntable rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mast. The antenna moved up and down between from 1meter to 4 meters to find out the maximum emission level.

The radiated emission was measured using the Spectrum Analyzer with the resolutions bandwidth set as:

RBW = 300 Hz, VBW = 1 kHz (9 kHz~150 kHz);
RBW = 10 kHz, VBW = 30 kHz (150 kHz~30MHz);
RBW = 100 kHz, VBW = 300 kHz (30MHz~1GHz for PK)
RBW = 1MHz, VBW = 3MHz (>1GHz for PK);

Remark:

1. Factor= Antenna Factor + Cable Loss (-Amplifier, is employed)
2. Measured level= Original Receiver Reading + Factor
3. Margin = Limit – Measured level
4. If the PK measured level is lower than AV limit, the AV test can be elided.

Example:

Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10dBuV.
Then Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m;
Measured level = 10dBuV + 0.20dB/m = 10.20dBuV/m
Assuming limit = 54dBuV/m,
Measured level = 10.20dBuV/m, then Margin = 54 - 10.20 = 43.80dBuV/m.

9.4 Test Protocol


Temperature: 22°C
Relative Humidity: 54%

All the two models of product were tested and the worst data was listed in the report.


The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

The worst waveform from 30MHz to 1000MHz (GFSK, 2480MHz) is listed as below:

Horizontal

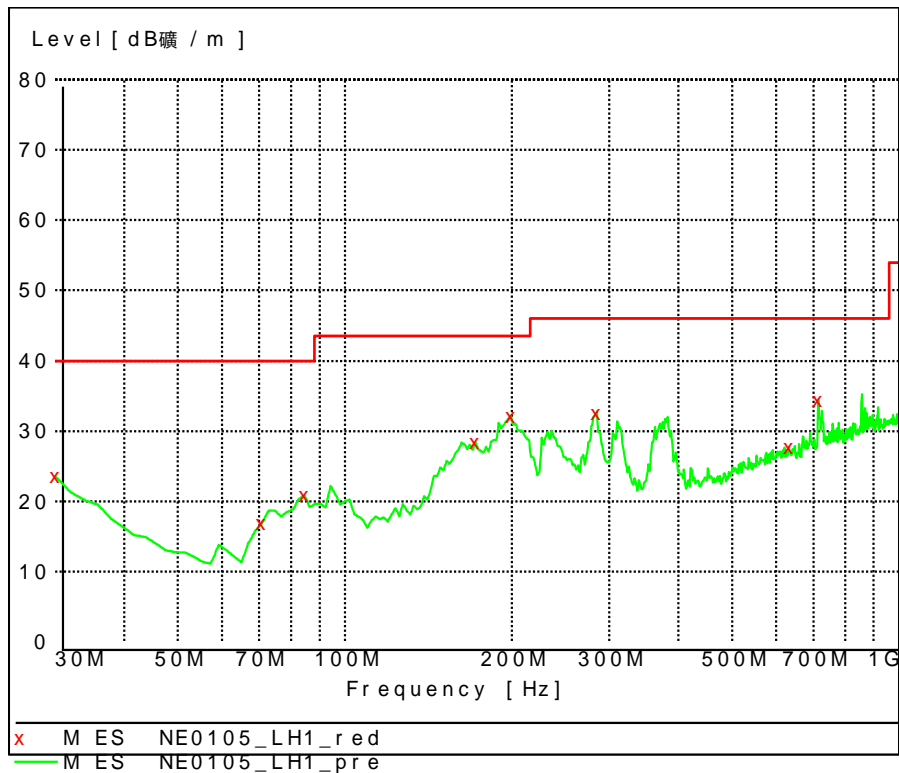

Vertical

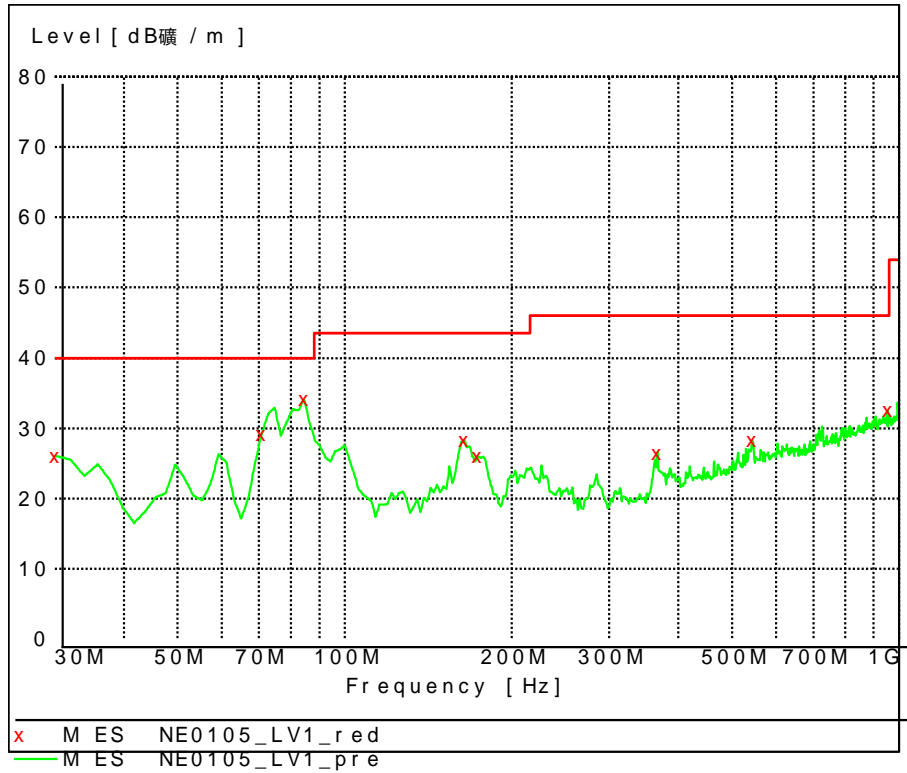

Test result below 1GHz:

Channel	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
H	H	199.12	32.20	12.2	43.5	11.30	PK
	H	284.65	32.60	15.2	46.0	13.40	PK
	H	714.25	34.40	22.6	46.0	11.60	PK
	V	30.00	26.10	21.0	40.0	13.90	PK
	V	70.82	29.20	8.5	40.0	10.80	PK
	V	84.43	34.10	9.3	40.0	5.90	PK

Test result above 1GHz:

The emission within the frequency range of 1GHz to 25GHz was tested.

GFSK:

Channel	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	V	2389.70	52.40	34.29	74.00	21.60	PK
	V	4804.20	51.20	-3.55	74.00	22.80	PK
M	V	4882.70	50.20	-3.35	74.00	23.80	PK
H	V	2483.65	51.60	34.63	74.00	22.40	PK
	V	4960.90	52.60	-3.16	74.00	21.40	PK

8DPSK:

Channel	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	V	2389.25	52.10	34.30	74.00	21.90	PK
	V	4804.31	50.80	-3.55	74.00	23.20	PK
M	V	4882.27	50.50	-3.35	74.00	23.50	PK
H	V	2483.85	51.60	34.65	74.00	22.40	PK
	V	4960.81	51.80	-3.16	74.00	22.20	PK

- Remark: 1. Correct Factor = Antenna Factor + Cable Loss (-Amplifier, is employed)
 2. Corrected Reading = Original Receiver Reading + Correct Factor
 3. Margin = limit – Corrected Reading

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
 Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10dBuV.
 Then Correct Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m; Corrected Reading = 10dBuV + 0.20dB/m = 10.20dBuV/m
 Assuming limit = 54dBuV/m, Corrected Reading = 10.20dBuV/m, then
 Margin = 54 -10.20 = 43.80dBuV/m

10 Power line conducted emission


Test result: Pass

10.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

10.2 Test configuration

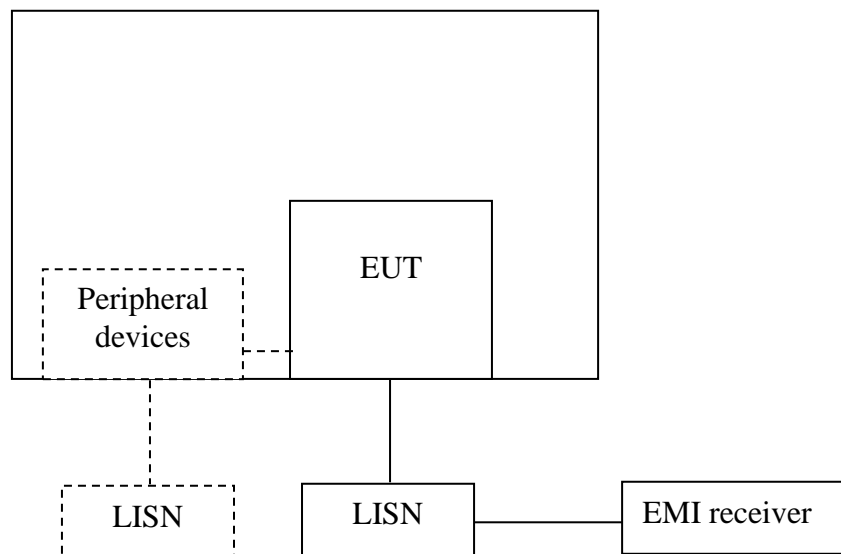

For table top equipment, wooden support is 0.8m height table

For floor standing equipment, wooden support is 0.1m height rack.

10.3 Test procedure and test set up

Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50 Ω LISN port (to which the EUT is connected), where permitted, terminated into a 50 Ω measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50 Ω measuring port is terminated by a measuring instrument having 50 Ω input impedance. All other ports are terminated in 50 Ω loads.


Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.

The bandwidth of the test receiver is set at 9 kHz.


10.4 Test protocol

Temperature: 22°C
Relative Humidity: 54%

L line:

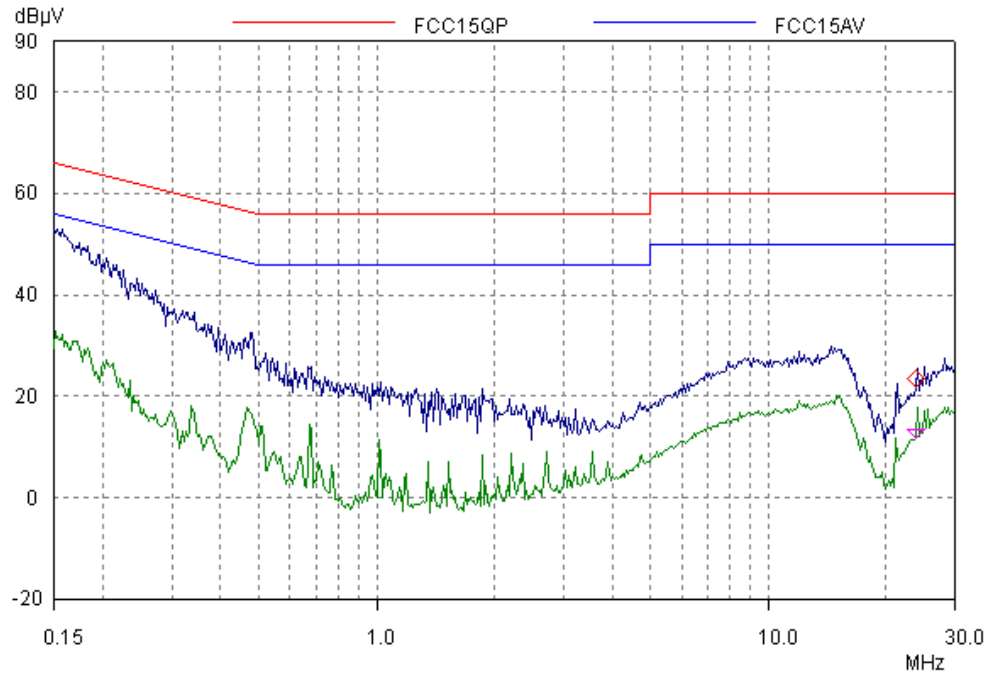

N line:

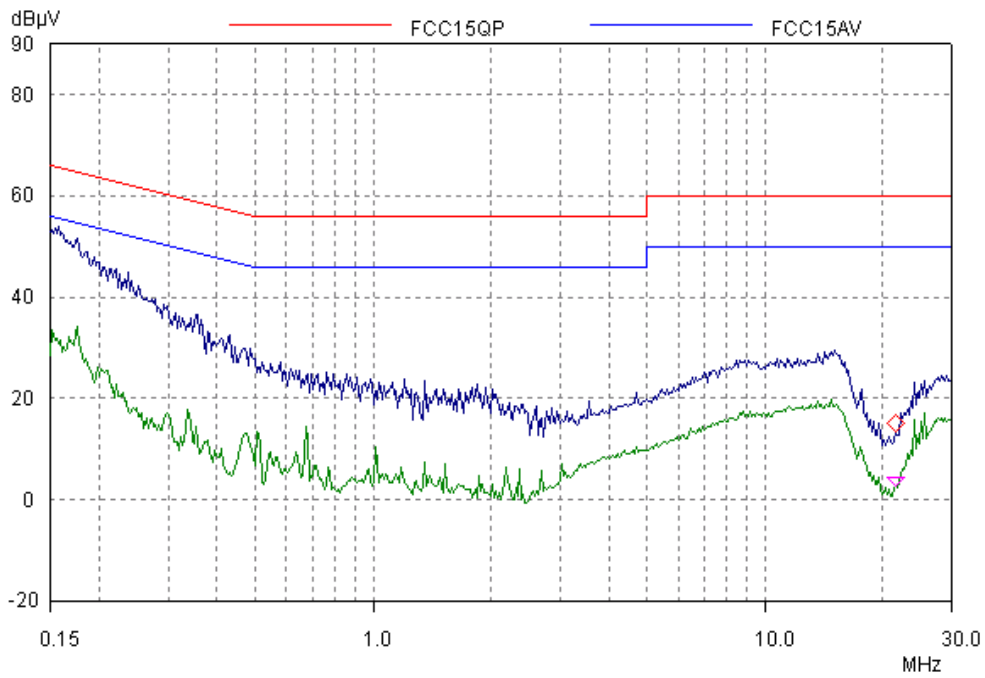


11 Occupied Bandwidth

Test Status: Tested

11.1 Test limit

None

11.2 Test Configuration

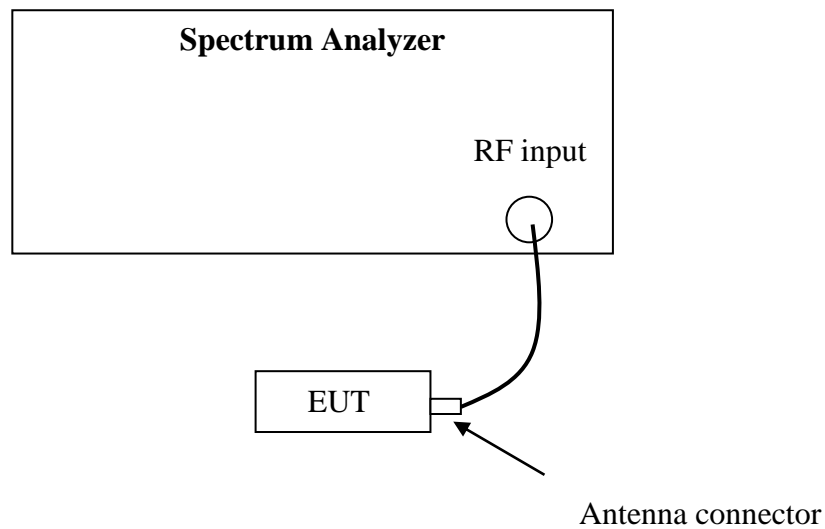

11.3 Test procedure and test setup


The occupied bandwidth per RSS-Gen Issue 4 Clause 6.6 was measured using the Spectrum Analyzer.

11.4 Test protocol

Temperature : 22 °C
Relative Humidity : 54 %

Modulation	Mode	99% Bandwidth (MHz)
GFSK	L	867.84
	M	859.41
	H	859.53

Channel L

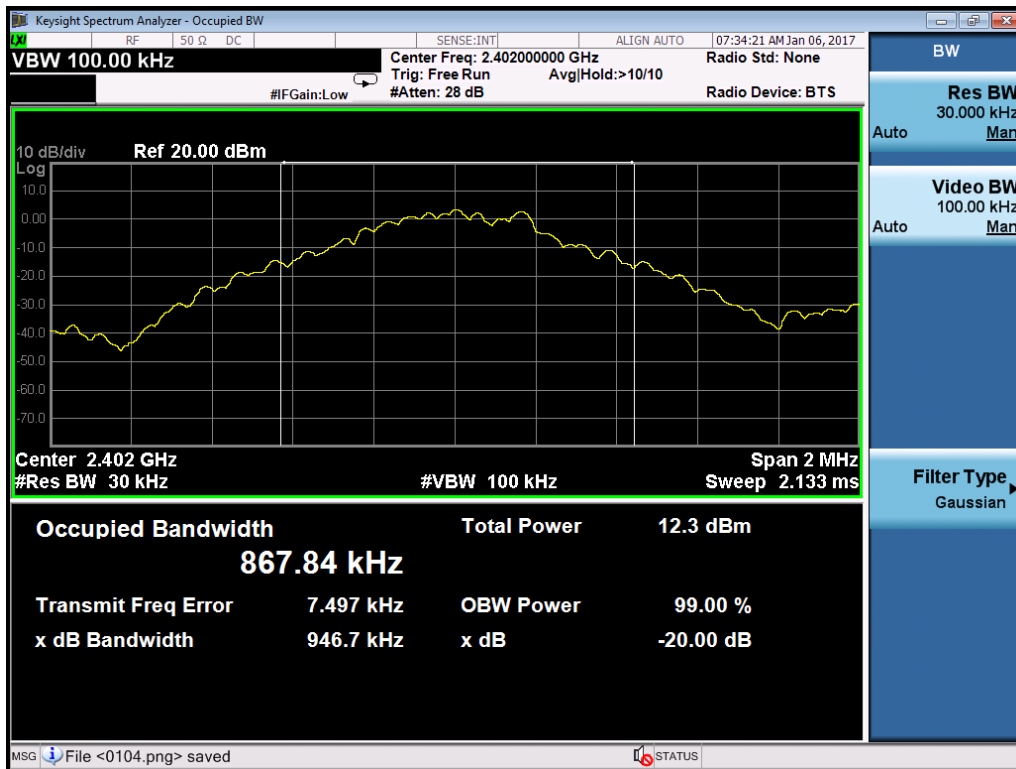

Channel M




Channel H




Modulation	Mode	99% Bandwidth (MHz)
8DPSK	L	1160.1
	M	1161.2
	H	1161.1

Channel L

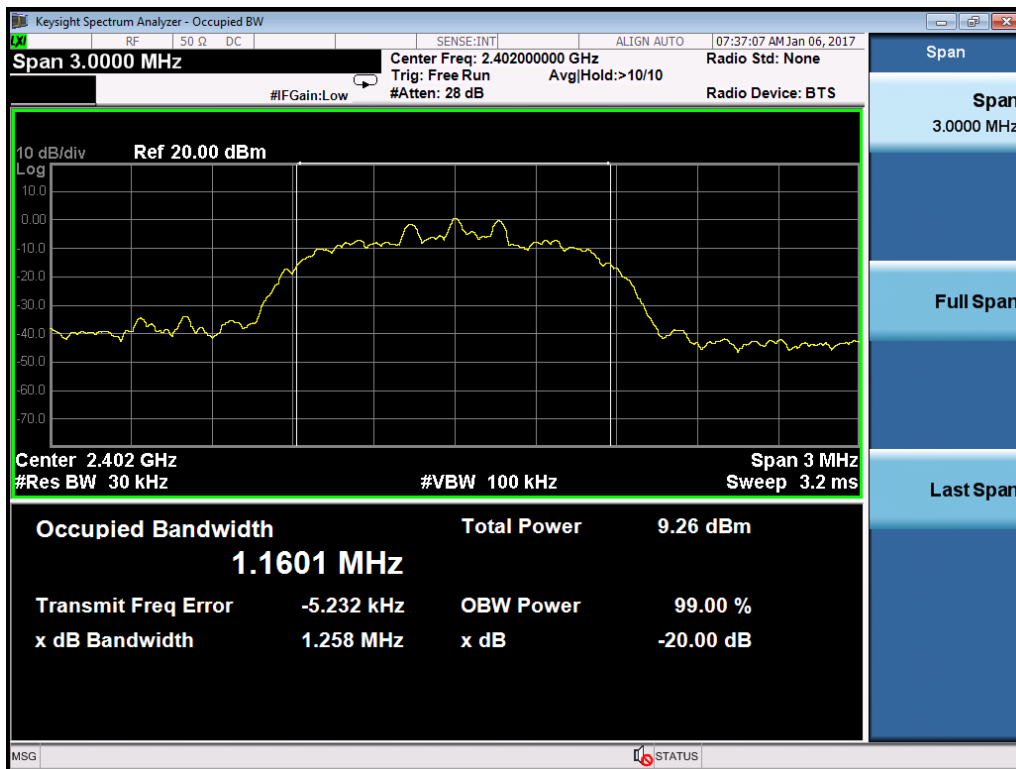

Channel M

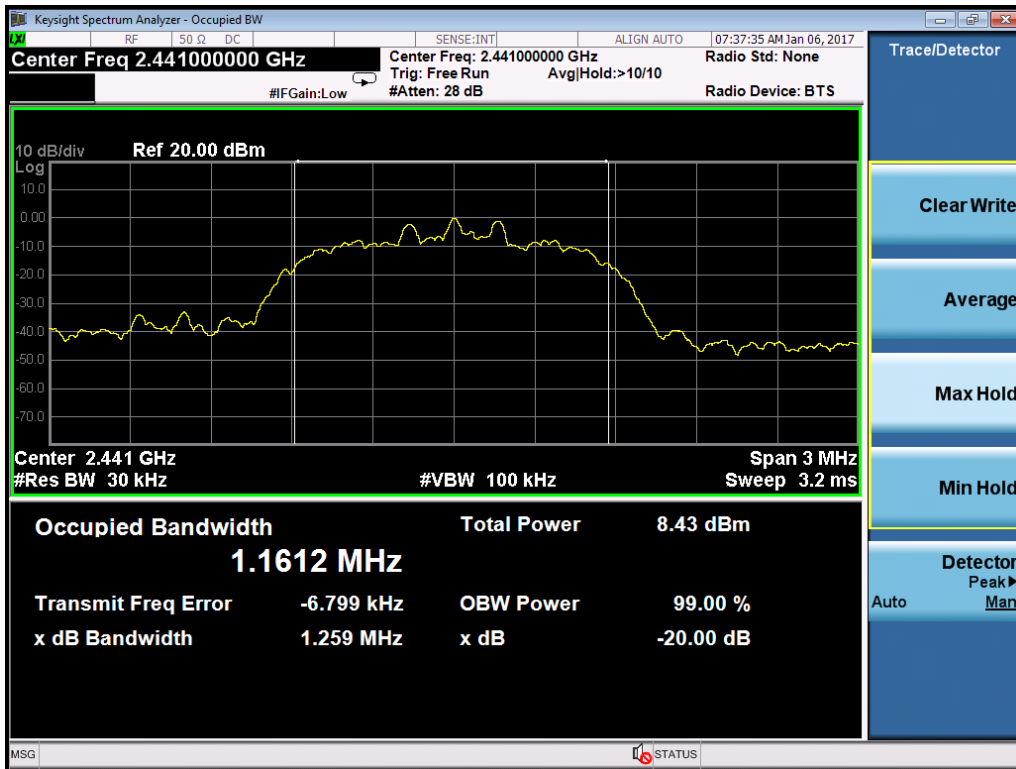

Channel H

