

| Band | Modulation | Bandwidth | RB Size | RB Offset | Channel | Frequency | Power |
|------|------------|-----------|---------|-----------|---------|-----------|-------|
| 7 | QPSK | 10 MHz | 50 | 0 | 20800 | 2505.0 | 12.9 |
| | | | | | 21100 | 2535.0 | 13.0 |
| | | | | | 21400 | 2565.0 | 12.7 |
| | | | 25 | 12 | 20800 | 2505.0 | 12.6 |
| | | | | | 21100 | 2535.0 | 13.2 |
| | | | | | 21400 | 2565.0 | 13.1 |
| | | | 1 | 0 | 20800 | 2505.0 | 13.8 |
| | | | | | 21100 | 2535.0 | 13.5 |
| | | | | | 21400 | 2565.0 | 13.6 |
| | | | 1 | 24 | 20800 | 2505.0 | 13.6 |
| | | | | | 21100 | 2535.0 | 14.1 |
| | | | | | 21400 | 2565.0 | 14.0 |
| | | 15 MHz | 75 | 0 | 20825 | 2507.5 | 12.8 |
| | | | | | 21100 | 2535.0 | 12.6 |
| | | | | | 21375 | 2562.5 | 12.8 |
| | | | 36 | 19 | 20825 | 2507.5 | 12.8 |
| | | | | | 21100 | 2535.0 | 12.8 |
| | | | | | 21375 | 2562.5 | 12.9 |
| | | | 1 | 0 | 20825 | 2507.5 | 13.8 |
| | | | | | 21100 | 2535.0 | 13.7 |
| | | | | | 21375 | 2562.5 | 13.6 |
| | | | 1 | 74 | 20825 | 2507.5 | 13.5 |
| | | | | | 21100 | 2535.0 | 14.0 |
| | | | | | 21375 | 2562.5 | 13.9 |
| | | 20 MHz | 100 | 0 | 20850 | 2510.0 | 13.1 |
| | | | | | 21100 | 2535.0 | 13.2 |
| | | | | | 21350 | 2560.0 | 12.8 |
| | | | 50 | 25 | 20850 | 2510.0 | 12.9 |
| | | | | | 21100 | 2535.0 | 12.9 |
| | | | | | 21350 | 2560.0 | 13.0 |
| | | | 1 | 0 | 20850 | 2510.0 | 13.6 |
| | | | | | 21100 | 2535.0 | 14.2 |
| | | | | | 21350 | 2560.0 | 13.8 |
| | | | 1 | 99 | 20850 | 2510.0 | 14.1 |
| | | | | | 21100 | 2535.0 | 13.9 |
| | | | | | 21350 | 2560.0 | 13.5 |

| Band | Modulation | Bandwidth | RB Size | RB Offset | Channel | Frequency | Power |
|------|------------|-----------|---------|-----------|---------|-----------|-------|
| 7 | 16QAM | 5 MHz | 25 | 0 | 20775 | 2502.5 | 11.8 |
| | | | | | 21100 | 2535.0 | 11.5 |
| | | | | | 21425 | 2567.5 | 11.7 |
| | | | 12 | 6 | 20775 | 2502.5 | 11.6 |
| | | | | | 21100 | 2535.0 | 11.6 |
| | | | | | 21425 | 2567.5 | 12.0 |
| | | | 1 | 0 | 20775 | 2502.5 | 12.6 |
| | | | | | 21100 | 2535.0 | 13.1 |
| | | | | | 21425 | 2567.5 | 12.5 |
| | | | 1 | 24 | 20775 | 2502.5 | 12.5 |
| | | | | | 21100 | 2535.0 | 13.2 |
| | | | | | 21425 | 2567.5 | 12.6 |

| Band | Modulation | Bandwidth | RB Size | RB Offset | Channel | Frequency | Power |
|------|------------|-----------|---------|-----------|---------|-----------|-------|
| 7 | 16QAM | 10 MHz | 50 | 0 | 20800 | 2505.0 | 12.1 |
| | | | | | 21100 | 2535.0 | 12.1 |
| | | | | | 21400 | 2565.0 | 11.9 |
| | | | 25 | 12 | 20800 | 2505.0 | 11.9 |
| | | | | | 21100 | 2535.0 | 11.5 |
| | | | | | 21400 | 2565.0 | 11.9 |
| | | | 1 | 0 | 20800 | 2505.0 | 12.6 |
| | | | | | 21100 | 2535.0 | 13.0 |
| | | | | | 21400 | 2565.0 | 12.7 |
| | | | 1 | 24 | 20800 | 2505.0 | 12.9 |
| | | | | | 21100 | 2535.0 | 13.0 |
| | | | | | 21400 | 2565.0 | 13.1 |
| | | 15 MHz | 75 | 0 | 20825 | 2507.5 | 12.1 |
| | | | | | 21100 | 2535.0 | 12.0 |
| | | | | | 21375 | 2562.5 | 12.2 |
| | | | 36 | 19 | 20825 | 2507.5 | 11.7 |
| | | | | | 21100 | 2535.0 | 12.0 |
| | | | | | 21375 | 2562.5 | 11.7 |
| | | | 1 | 0 | 20825 | 2507.5 | 13.2 |
| | | | | | 21100 | 2535.0 | 13.2 |
| | | | | | 21375 | 2562.5 | 13.0 |
| | | | 1 | 74 | 20825 | 2507.5 | 13.2 |
| | | | | | 21100 | 2535.0 | 12.8 |
| | | | | | 21375 | 2562.5 | 12.9 |
| | | 20 MHz | 100 | 0 | 20850 | 2510.0 | 12.0 |
| | | | | | 21100 | 2535.0 | 11.9 |
| | | | | | 21350 | 2560.0 | 11.9 |
| | | | 50 | 25 | 20850 | 2510.0 | 12.0 |
| | | | | | 21100 | 2535.0 | 12.1 |
| | | | | | 21350 | 2560.0 | 11.9 |
| | | | 1 | 0 | 20850 | 2510.0 | 12.7 |
| | | | | | 21100 | 2535.0 | 12.8 |
| | | | | | 21350 | 2560.0 | 13.1 |
| | | | 1 | 99 | 20850 | 2510.0 | 13.0 |
| | | | | | 21100 | 2535.0 | 12.8 |
| | | | | | 21350 | 2560.0 | 12.6 |

| Band | Modulation | Bandwidth | RB Size | RB Offset | Channel | Frequency | Power |
|------|------------|-----------|---------|-----------|---------|-----------|-------|
| 41 | QPSK | 5 MHz | 25 | 0 | 39675 | 2498.5 | 14.6 |
| | | | | | 40620 | 2593.0 | 14.5 |
| | | | | | 41565 | 2687.5 | 14.9 |
| | | | 12 | 6 | 39675 | 2498.5 | 14.7 |
| | | | | | 40620 | 2593.0 | 14.5 |
| | | | | | 41565 | 2687.5 | 15.0 |
| | | | 1 | 0 | 39675 | 2498.5 | 15.8 |
| | | | | | 40620 | 2593.0 | 15.6 |
| | | | | | 41565 | 2687.5 | 16.0 |
| | | | 1 | 24 | 39675 | 2498.5 | 15.7 |
| | | | | | 40620 | 2593.0 | 15.7 |
| | | | | | 41565 | 2687.5 | 16.1 |

| Band | Modulation | Bandwidth | RB Size | RB Offset | Channel | Frequency | Power |
|------|------------|-----------|---------|-----------|---------|-----------|-------|
| 41 | QPSK | 10 MHz | 50 | 0 | 39700 | 2501.0 | 15.0 |
| | | | | | 40620 | 2593.0 | 15.1 |
| | | | | | 41540 | 2685.0 | 15.1 |
| | | | 25 | 12 | 39700 | 2501.0 | 14.6 |
| | | | | | 40620 | 2593.0 | 14.7 |
| | | | | | 41540 | 2685.0 | 14.8 |
| | | | 1 | 0 | 39700 | 2501.0 | 15.5 |
| | | | | | 40620 | 2593.0 | 15.6 |
| | | | | | 41540 | 2685.0 | 15.5 |
| | | | 1 | 24 | 39700 | 2501.0 | 15.5 |
| | | | | | 40620 | 2593.0 | 15.8 |
| | | | | | 41540 | 2685.0 | 16.1 |
| | | 15 MHz | 75 | 0 | 39725 | 2503.5 | 15.0 |
| | | | | | 40620 | 2593.0 | 14.9 |
| | | | | | 41515 | 2682.5 | 15.0 |
| | | | 36 | 19 | 39725 | 2503.5 | 14.9 |
| | | | | | 40620 | 2593.0 | 14.5 |
| | | | | | 41515 | 2682.5 | 14.7 |
| | | | 1 | 0 | 39725 | 2503.5 | 15.9 |
| | | | | | 40620 | 2593.0 | 16.2 |
| | | | | | 41515 | 2682.5 | 16.2 |
| | | | 1 | 74 | 39725 | 2503.5 | 15.8 |
| | | | | | 40620 | 2593.0 | 15.8 |
| | | | | | 41515 | 2682.5 | 15.9 |
| | | 20 MHz | 100 | 0 | 39750 | 2506.0 | 14.9 |
| | | | | | 40620 | 2593.0 | 14.6 |
| | | | | | 41490 | 2680.0 | 15.0 |
| | | | 50 | 25 | 39750 | 2506.0 | 14.7 |
| | | | | | 40620 | 2593.0 | 14.6 |
| | | | | | 41490 | 2680.0 | 14.6 |
| | | | 1 | 0 | 39750 | 2506.0 | 15.5 |
| | | | | | 40620 | 2593.0 | 16.1 |
| | | | | | 41490 | 2680.0 | 16.0 |
| | | | 1 | 99 | 39750 | 2506.0 | 15.7 |
| | | | | | 40620 | 2593.0 | 16.1 |
| | | | | | 41490 | 2680.0 | 15.6 |

| Band | Modulation | Bandwidth | RB Size | RB Offset | Channel | Frequency | Power |
|------|------------|-----------|---------|-----------|---------|-----------|-------|
| 41 | 16QAM | 5 MHz | 25 | 0 | 39675 | 2498.5 | 14.0 |
| | | | | | 40620 | 2593.0 | 13.9 |
| | | | | | 41565 | 2687.5 | 13.6 |
| | | | 12 | 6 | 39675 | 2498.5 | 14.0 |
| | | | | | 40620 | 2593.0 | 14.0 |
| | | | | | 41565 | 2687.5 | 13.7 |
| | | | 1 | 0 | 39675 | 2498.5 | 14.7 |
| | | | | | 40620 | 2593.0 | 14.7 |
| | | | | | 41565 | 2687.5 | 14.5 |
| | | | 1 | 24 | 39675 | 2498.5 | 15.1 |
| | | | | | 40620 | 2593.0 | 14.9 |
| | | | | | 41565 | 2687.5 | 15.1 |

| Band | Modulation | Bandwidth | RB Size | RB Offset | Channel | Frequency | Power |
|------|------------|-----------|---------|-----------|---------|-----------|-------|
| 41 | 16QAM | 10 MHz | 50 | 0 | 39700 | 2501.0 | 13.8 |
| | | | | | 40620 | 2593.0 | 13.9 |
| | | | | | 41540 | 2685.0 | 13.7 |
| | | | 25 | 12 | 39700 | 2501.0 | 14.2 |
| | | | | | 40620 | 2593.0 | 14.2 |
| | | | | | 41540 | 2685.0 | 13.7 |
| | | | 1 | 0 | 39700 | 2501.0 | 14.7 |
| | | | | | 40620 | 2593.0 | 14.7 |
| | | | | | 41540 | 2685.0 | 15.0 |
| | | | 1 | 24 | 39700 | 2501.0 | 15.1 |
| | | | | | 40620 | 2593.0 | 14.7 |
| | | | | | 41540 | 2685.0 | 15.1 |
| | | 15 MHz | 75 | 0 | 39725 | 2503.5 | 13.7 |
| | | | | | 40620 | 2593.0 | 14.2 |
| | | | | | 41515 | 2682.5 | 13.9 |
| | | | 36 | 19 | 39725 | 2503.5 | 13.9 |
| | | | | | 40620 | 2593.0 | 14.2 |
| | | | | | 41515 | 2682.5 | 13.5 |
| | | | 1 | 0 | 39725 | 2503.5 | 15.2 |
| | | | | | 40620 | 2593.0 | 14.9 |
| | | | | | 41515 | 2682.5 | 15.2 |
| | | | 1 | 74 | 39725 | 2503.5 | 15.1 |
| | | | | | 40620 | 2593.0 | 15.1 |
| | | | | | 41515 | 2682.5 | 15.1 |
| | | 20 MHz | 100 | 0 | 39750 | 2506.0 | 14.0 |
| | | | | | 40620 | 2593.0 | 14.2 |
| | | | | | 41490 | 2680.0 | 14.1 |
| | | | 50 | 25 | 39750 | 2506.0 | 13.8 |
| | | | | | 40620 | 2593.0 | 14.1 |
| | | | | | 41490 | 2680.0 | 13.9 |
| | | | 1 | 0 | 39750 | 2506.0 | 14.8 |
| | | | | | 40620 | 2593.0 | 14.6 |
| | | | | | 41490 | 2680.0 | 14.6 |
| | | | 1 | 99 | 39750 | 2506.0 | 15.0 |
| | | | | | 40620 | 2593.0 | 14.8 |
| | | | | | 41490 | 2680.0 | 15.1 |

| Band | Modulation | Bandwidth | RB Size | RB Offset | Channel | Frequency | Power |
|------|------------|-----------|---------|-----------|---------|-----------|-------|
| 2 | QPSK | 1.4 MHz | 6 | 0 | 18607 | 1850.7 | 13.8 |
| | | | | | 18900 | 1880.0 | 14.0 |
| | | | | | 19193 | 1909.3 | 14.1 |
| | | | 3 | 1 | 18607 | 1850.7 | 14.1 |
| | | | | | 18900 | 1880.0 | 14.0 |
| | | | | | 19193 | 1909.3 | 13.8 |
| | | | 1 | 0 | 18607 | 1850.7 | 14.6 |
| | | | | | 18900 | 1880.0 | 14.6 |
| | | | | | 19193 | 1909.3 | 15.0 |
| | | 1 | 5 | 18607 | 1850.7 | 15.0 | |
| | | | | 18900 | 1880.0 | 14.9 | |
| | | | | 19193 | 1909.3 | 15.2 | |
| | | 3 MHz | 15 | 0 | 18615 | 1851.5 | 13.6 |
| | | | | | 18900 | 1880.0 | 13.7 |
| | | | | | 19185 | 1908.5 | 13.6 |
| | | | 8 | 3 | 18615 | 1851.5 | 13.6 |
| | | | | | 18900 | 1880.0 | 13.5 |
| | | | | | 19185 | 1908.5 | 13.6 |
| | | | 1 | 0 | 18615 | 1851.5 | 15.0 |
| | | | | | 18900 | 1880.0 | 14.9 |
| | | | | | 19185 | 1908.5 | 14.9 |
| | | 1 | 14 | 18615 | 1851.5 | 14.9 | |
| | | | | 18900 | 1880.0 | 15.1 | |
| | | | | 19185 | 1908.5 | 15.2 | |
| | | 5 MHz | 25 | 0 | 18625 | 1852.5 | 13.6 |
| | | | | | 18900 | 1880.0 | 13.6 |
| | | | | | 19175 | 1907.5 | 13.6 |
| | | | 12 | 6 | 18625 | 1852.5 | 13.6 |
| | | | | | 18900 | 1880.0 | 13.8 |
| | | | | | 19175 | 1907.5 | 14.2 |
| 1 | 0 | | 18625 | 1852.5 | 14.9 | | |
| | | | 18900 | 1880.0 | 15.1 | | |
| | | | 19175 | 1907.5 | 14.6 | | |
| 1 | 24 | 18625 | 1852.5 | 14.7 | | | |
| | | 18900 | 1880.0 | 15.0 | | | |
| | | 19175 | 1907.5 | 14.8 | | | |

| Band | Modulation | Bandwidth | RB Size | RB Offset | Channel | Frequency | Power |
|------|------------|-----------|---------|-----------|---------|-----------|-------|
| 2 | QPSK | 10 MHz | 50 | 0 | 18650 | 1855.0 | 13.8 |
| | | | | | 18900 | 1880.0 | 14.2 |
| | | | | | 19150 | 1905.0 | 13.8 |
| | | | 25 | 12 | 18650 | 1855.0 | 13.7 |
| | | | | | 18900 | 1880.0 | 13.7 |
| | | | | | 19150 | 1905.0 | 13.7 |
| | | | 1 | 0 | 18650 | 1855.0 | 15.0 |
| | | | | | 18900 | 1880.0 | 14.7 |
| | | | | | 19150 | 1905.0 | 14.5 |
| | | 1 | 24 | 18650 | 1855.0 | 15.2 | |
| | | | | 18900 | 1880.0 | 14.9 | |
| | | | | 19150 | 1905.0 | 14.6 | |
| | | 15 MHz | 75 | 0 | 18675 | 1857.5 | 13.6 |
| | | | | | 18900 | 1880.0 | 14.0 |
| | | | | | 19125 | 1902.5 | 13.6 |
| | | | 36 | 19 | 18675 | 1857.5 | 14.0 |
| | | | | | 18900 | 1880.0 | 13.6 |
| | | | | | 19125 | 1902.5 | 14.1 |
| | | | 1 | 0 | 18675 | 1857.5 | 14.7 |
| | | | | | 18900 | 1880.0 | 15.1 |
| | | | | | 19125 | 1902.5 | 14.6 |
| | | 1 | 74 | 18675 | 1857.5 | 14.6 | |
| | | | | 18900 | 1880.0 | 14.9 | |
| | | | | 19125 | 1902.5 | 15.1 | |
| | | 20 MHz | 100 | 0 | 18700 | 1860.0 | 13.6 |
| | | | | | 18900 | 1880.0 | 13.8 |
| | | | | | 19100 | 1900.0 | 13.9 |
| | | | 50 | 25 | 18700 | 1860.0 | 13.9 |
| | | | | | 18900 | 1880.0 | 14.2 |
| | | | | | 19100 | 1900.0 | 13.8 |
| 1 | 0 | | 18700 | 1860.0 | 14.8 | | |
| | | | 18900 | 1880.0 | 15.1 | | |
| | | | 19100 | 1900.0 | 15.0 | | |
| 1 | 99 | 18700 | 1860.0 | 14.5 | | | |
| | | 18900 | 1880.0 | 14.7 | | | |
| | | 19100 | 1900.0 | 14.6 | | | |

| Band | Modulation | Bandwidth | RB Size | RB Offset | Channel | Frequency | Power |
|------|------------|-----------|---------|-----------|---------|-----------|-------|
| 2 | 16QAM | 1.4 MHz | 6 | 0 | 18607 | 1850.7 | 13.0 |
| | | | | | 18900 | 1880.0 | 13.0 |
| | | | | | 19193 | 1909.3 | 12.9 |
| | | | 3 | 1 | 18607 | 1850.7 | 12.8 |
| | | | | | 18900 | 1880.0 | 13.1 |
| | | | | | 19193 | 1909.3 | 12.9 |
| | | | 1 | 0 | 18607 | 1850.7 | 13.9 |
| | | | | | 18900 | 1880.0 | 13.6 |
| | | | | | 19193 | 1909.3 | 13.9 |
| | | | 1 | 5 | 18607 | 1850.7 | 13.7 |
| | | | | | 18900 | 1880.0 | 14.2 |
| | | | | | 19193 | 1909.3 | 13.8 |
| | | 3 MHz | 15 | 0 | 18615 | 1851.5 | 13.1 |
| | | | | | 18900 | 1880.0 | 12.6 |
| | | | | | 19185 | 1908.5 | 12.6 |
| | | | 8 | 3 | 18615 | 1851.5 | 12.9 |
| | | | | | 18900 | 1880.0 | 13.1 |
| | | | | | 19185 | 1908.5 | 12.8 |
| | | | 1 | 0 | 18615 | 1851.5 | 14.0 |
| | | | | | 18900 | 1880.0 | 14.0 |
| | | | | | 19185 | 1908.5 | 13.6 |
| | | | 1 | 14 | 18615 | 1851.5 | 13.6 |
| | | | | | 18900 | 1880.0 | 14.1 |
| | | | | | 19185 | 1908.5 | 13.6 |
| | | 5 MHz | 25 | 0 | 18625 | 1852.5 | 12.8 |
| | | | | | 18900 | 1880.0 | 12.6 |
| | | | | | 19175 | 1907.5 | 13.1 |
| | | | 12 | 6 | 18625 | 1852.5 | 12.6 |
| | | | | | 18900 | 1880.0 | 12.7 |
| | | | | | 19175 | 1907.5 | 13.0 |
| 1 | 0 | | 18625 | 1852.5 | 14.1 | | |
| | | | 18900 | 1880.0 | 13.9 | | |
| | | | 19175 | 1907.5 | 13.7 | | |
| 1 | 24 | | 18625 | 1852.5 | 14.0 | | |
| | | | 18900 | 1880.0 | 13.8 | | |
| | | | 19175 | 1907.5 | 14.0 | | |

| Band | Modulation | Bandwidth | RB Size | RB Offset | Channel | Frequency | Power |
|------|------------|-----------|---------|-----------|---------|-----------|-------|
| 2 | 16QAM | 10 MHz | 50 | 0 | 18650 | 1855.0 | 12.5 |
| | | | | | 18900 | 1880.0 | 13.0 |
| | | | | | 19150 | 1905.0 | 12.9 |
| | | | 25 | 12 | 18650 | 1855.0 | 13.0 |
| | | | | | 18900 | 1880.0 | 13.0 |
| | | | | | 19150 | 1905.0 | 12.7 |
| | | | 1 | 0 | 18650 | 1855.0 | 14.2 |
| | | | | | 18900 | 1880.0 | 14.1 |
| | | | | | 19150 | 1905.0 | 13.6 |
| | | 1 | 24 | 18650 | 1855.0 | 13.9 | |
| | | | | 18900 | 1880.0 | 13.6 | |
| | | | | 19150 | 1905.0 | 13.5 | |
| | | 15 MHz | 75 | 0 | 18675 | 1857.5 | 12.6 |
| | | | | | 18900 | 1880.0 | 13.2 |
| | | | | | 19125 | 1902.5 | 13.0 |
| | | | 36 | 19 | 18675 | 1857.5 | 12.6 |
| | | | | | 18900 | 1880.0 | 12.5 |
| | | | | | 19125 | 1902.5 | 12.6 |
| | | | 1 | 0 | 18675 | 1857.5 | 14.1 |
| | | | | | 18900 | 1880.0 | 14.0 |
| | | | | | 19125 | 1902.5 | 13.9 |
| | | 1 | 74 | 18675 | 1857.5 | 13.6 | |
| | | | | 18900 | 1880.0 | 14.2 | |
| | | | | 19125 | 1902.5 | 13.7 | |
| | | 20 MHz | 100 | 0 | 18700 | 1860.0 | 12.6 |
| | | | | | 18900 | 1880.0 | 13.1 |
| | | | | | 19100 | 1900.0 | 12.6 |
| | | | 50 | 25 | 18700 | 1860.0 | 12.6 |
| | | | | | 18900 | 1880.0 | 12.7 |
| | | | | | 19100 | 1900.0 | 12.8 |
| | | | 1 | 0 | 18700 | 1860.0 | 13.6 |
| | | | | | 18900 | 1880.0 | 13.8 |
| | | | | | 19100 | 1900.0 | 13.6 |
| | | 1 | 99 | 18700 | 1860.0 | 13.8 | |
| | | | | 18900 | 1880.0 | 13.6 | |
| | | | | 19100 | 1900.0 | 13.9 | |

| Band | Modulation | Bandwidth | RB Size | RB Offset | Channel | Frequency | Power |
|------|------------|-----------|---------|-----------|---------|-----------|-------|
| 25 | QPSK | 1.4 MHz | 6 | 0 | 26047 | 1850.7 | 13.6 |
| | | | | | 26365 | 1882.5 | 13.5 |
| | | | | | 26683 | 1914.3 | 13.7 |
| | | | 3 | 1 | 26047 | 1850.7 | 13.6 |
| | | | | | 26365 | 1882.5 | 14.1 |
| | | | | | 26683 | 1914.3 | 13.7 |
| | | | 1 | 0 | 26047 | 1850.7 | 14.9 |
| | | | | | 26365 | 1882.5 | 14.7 |
| | | | | | 26683 | 1914.3 | 14.5 |
| | | | 1 | 5 | 26047 | 1850.7 | 14.7 |
| | | | | | 26365 | 1882.5 | 14.6 |
| | | | | | 26683 | 1914.3 | 14.5 |
| | | 3 MHz | 15 | 0 | 26055 | 1851.5 | 13.6 |
| | | | | | 26365 | 1882.5 | 13.7 |
| | | | | | 26675 | 1913.5 | 13.8 |
| | | | 8 | 3 | 26055 | 1851.5 | 13.8 |
| | | | | | 26365 | 1882.5 | 13.7 |
| | | | | | 26675 | 1913.5 | 14.0 |
| | | | 1 | 0 | 26055 | 1851.5 | 14.8 |
| | | | | | 26365 | 1882.5 | 14.9 |
| | | | | | 26675 | 1913.5 | 14.6 |
| | | | 1 | 14 | 26055 | 1851.5 | 14.9 |
| | | | | | 26365 | 1882.5 | 14.8 |
| | | | | | 26675 | 1913.5 | 15.0 |
| | | 5 MHz | 25 | 0 | 26065 | 1852.5 | 13.6 |
| | | | | | 26365 | 1882.5 | 14.1 |
| | | | | | 26665 | 1912.5 | 14.0 |
| | | | 12 | 6 | 26065 | 1852.5 | 13.8 |
| | | | | | 26365 | 1882.5 | 13.7 |
| | | | | | 26665 | 1912.5 | 13.9 |
| | | | 1 | 0 | 26065 | 1852.5 | 15.0 |
| | | | | | 26365 | 1882.5 | 15.2 |
| | | | | | 26665 | 1912.5 | 15.1 |
| | | | 1 | 24 | 26065 | 1852.5 | 15.2 |
| | | | | | 26365 | 1882.5 | 15.0 |
| | | | | | 26665 | 1912.5 | 14.8 |

| Band | Modulation | Bandwidth | RB Size | RB Offset | Channel | Frequency | Power |
|------|------------|-----------|---------|-----------|---------|-----------|-------|
| 25 | QPSK | 10 MHz | 50 | 0 | 26090 | 1855.0 | 14.0 |
| | | | | | 26365 | 1882.5 | 14.2 |
| | | | | | 26640 | 1910.0 | 13.6 |
| | | | 25 | 12 | 26090 | 1855.0 | 13.5 |
| | | | | | 26365 | 1882.5 | 13.9 |
| | | | | | 26640 | 1910.0 | 14.2 |
| | | | 1 | 0 | 26090 | 1855.0 | 14.5 |
| | | | | | 26365 | 1882.5 | 14.9 |
| | | | | | 26640 | 1910.0 | 15.2 |
| | | 1 | 24 | 26090 | 1855.0 | 15.0 | |
| | | | | 26365 | 1882.5 | 14.9 | |
| | | | | 26640 | 1910.0 | 15.0 | |
| | | 15 MHz | 75 | 0 | 26115 | 1857.5 | 14.0 |
| | | | | | 26365 | 1882.5 | 13.5 |
| | | | | | 26615 | 1907.5 | 13.5 |
| | | | 36 | 19 | 26115 | 1857.5 | 14.2 |
| | | | | | 26365 | 1882.5 | 13.6 |
| | | | | | 26615 | 1907.5 | 13.6 |
| | | | 1 | 0 | 26115 | 1857.5 | 15.1 |
| | | | | | 26365 | 1882.5 | 14.8 |
| | | | | | 26615 | 1907.5 | 14.9 |
| | | 1 | 74 | 26115 | 1857.5 | 14.6 | |
| | | | | 26365 | 1882.5 | 14.9 | |
| | | | | 26615 | 1907.5 | 14.5 | |
| | | 20 MHz | 100 | 0 | 26140 | 1860.0 | 14.0 |
| | | | | | 26365 | 1882.5 | 14.0 |
| | | | | | 26590 | 1905.0 | 14.1 |
| | | | 50 | 25 | 26140 | 1860.0 | 14.1 |
| | | | | | 26365 | 1882.5 | 13.5 |
| | | | | | 26590 | 1905.0 | 13.9 |
| 1 | 0 | | 26140 | 1860.0 | 15.0 | | |
| | | | 26365 | 1882.5 | 14.8 | | |
| | | | 26590 | 1905.0 | 15.1 | | |
| 1 | 99 | 26140 | 1860.0 | 15.1 | | | |
| | | 26365 | 1882.5 | 15.2 | | | |
| | | 26590 | 1905.0 | 14.6 | | | |

| Band | Modulation | Bandwidth | RB Size | RB Offset | Channel | Frequency | Power |
|------|------------|-----------|---------|-----------|---------|-----------|-------|
| 25 | 16QAM | 1.4 MHz | 6 | 0 | 26047 | 1850.7 | 12.9 |
| | | | | | 26365 | 1882.5 | 12.8 |
| | | | | | 26683 | 1914.3 | 13.0 |
| | | | 3 | 1 | 26047 | 1850.7 | 12.9 |
| | | | | | 26365 | 1882.5 | 13.2 |
| | | | | | 26683 | 1914.3 | 12.7 |
| | | | 1 | 0 | 26047 | 1850.7 | 13.9 |
| | | | | | 26365 | 1882.5 | 14.1 |
| | | | | | 26683 | 1914.3 | 13.6 |
| | | | 1 | 5 | 26047 | 1850.7 | 13.9 |
| | | | | | 26365 | 1882.5 | 13.8 |
| | | | | | 26683 | 1914.3 | 14.1 |
| | | 3 MHz | 15 | 0 | 26055 | 1851.5 | 13.2 |
| | | | | | 26365 | 1882.5 | 12.7 |
| | | | | | 26675 | 1913.5 | 13.2 |
| | | | 8 | 3 | 26055 | 1851.5 | 13.1 |
| | | | | | 26365 | 1882.5 | 12.8 |
| | | | | | 26675 | 1913.5 | 13.2 |
| | | | 1 | 0 | 26055 | 1851.5 | 14.0 |
| | | | | | 26365 | 1882.5 | 13.7 |
| | | | | | 26675 | 1913.5 | 14.0 |
| | | | 1 | 14 | 26055 | 1851.5 | 13.9 |
| | | | | | 26365 | 1882.5 | 14.2 |
| | | | | | 26675 | 1913.5 | 13.6 |
| | | 5 MHz | 25 | 0 | 26065 | 1852.5 | 12.9 |
| | | | | | 26365 | 1882.5 | 12.8 |
| | | | | | 26665 | 1912.5 | 12.9 |
| | | | 12 | 6 | 26065 | 1852.5 | 13.0 |
| | | | | | 26365 | 1882.5 | 12.9 |
| | | | | | 26665 | 1912.5 | 12.8 |
| | | | 1 | 0 | 26065 | 1852.5 | 13.8 |
| | | | | | 26365 | 1882.5 | 13.8 |
| | | | | | 26665 | 1912.5 | 13.7 |
| | | | 1 | 24 | 26065 | 1852.5 | 13.7 |
| | | | | | 26365 | 1882.5 | 13.8 |
| | | | | | 26665 | 1912.5 | 13.6 |

| Band | Modulation | Bandwidth | RB Size | RB Offset | Channel | Frequency | Power |
|------|------------|-----------|---------|-----------|---------|-----------|-------|
| 25 | 16QAM | 10 MHz | 50 | 0 | 26090 | 1855.0 | 12.5 |
| | | | | | 26365 | 1882.5 | 12.7 |
| | | | | | 26640 | 1910.0 | 13.1 |
| | | | 25 | 12 | 26090 | 1855.0 | 13.1 |
| | | | | | 26365 | 1882.5 | 12.8 |
| | | | | | 26640 | 1910.0 | 13.0 |
| | | | 1 | 0 | 26090 | 1855.0 | 13.6 |
| | | | | | 26365 | 1882.5 | 14.1 |
| | | | | | 26640 | 1910.0 | 13.8 |
| | | 1 | 24 | 26090 | 1855.0 | 14.0 | |
| | | | | 26365 | 1882.5 | 13.6 | |
| | | | | 26640 | 1910.0 | 14.1 | |
| | | 15 MHz | 75 | 0 | 26115 | 1857.5 | 12.8 |
| | | | | | 26365 | 1882.5 | 13.0 |
| | | | | | 26615 | 1907.5 | 13.2 |
| | | | 36 | 19 | 26115 | 1857.5 | 12.8 |
| | | | | | 26365 | 1882.5 | 13.2 |
| | | | | | 26615 | 1907.5 | 13.0 |
| | | | 1 | 0 | 26115 | 1857.5 | 13.9 |
| | | | | | 26365 | 1882.5 | 13.7 |
| | | | | | 26615 | 1907.5 | 14.2 |
| | | 1 | 74 | 26115 | 1857.5 | 13.6 | |
| | | | | 26365 | 1882.5 | 13.6 | |
| | | | | 26615 | 1907.5 | 14.1 | |
| | | 20 MHz | 100 | 0 | 26140 | 1860.0 | 12.6 |
| | | | | | 26365 | 1882.5 | 12.7 |
| | | | | | 26590 | 1905.0 | 12.6 |
| | | | 50 | 25 | 26140 | 1860.0 | 12.6 |
| | | | | | 26365 | 1882.5 | 13.1 |
| | | | | | 26590 | 1905.0 | 12.5 |
| 1 | 0 | | 26140 | 1860.0 | 13.8 | | |
| | | | 26365 | 1882.5 | 13.6 | | |
| | | | 26590 | 1905.0 | 13.8 | | |
| 1 | 99 | 26140 | 1860.0 | 13.9 | | | |
| | | 26365 | 1882.5 | 13.5 | | | |
| | | 26590 | 1905.0 | 14.0 | | | |

| Band | Modulation | Bandwidth | RB Size | RB Offset | Channel | Frequency | Power |
|------|------------|-----------|---------|-----------|---------|-----------|-------|
| 17 | QPSK | 5 MHz | 25 | 0 | 23755 | 706.5 | 19.0 |
| | | | | | 23790 | 710.0 | 18.8 |
| | | | | | 23824 | 713.5 | 18.6 |
| | | | 12 | 6 | 23755 | 706.5 | 18.9 |
| | | | | | 23790 | 710.0 | 18.9 |
| | | | | | 23824 | 713.5 | 18.8 |
| | | | 1 | 0 | 23755 | 706.5 | 19.8 |
| | | | | | 23790 | 710.0 | 19.8 |
| | | | | | 23824 | 713.5 | 19.7 |
| | | 1 | 24 | 23755 | 706.5 | 19.8 | |
| | | | | 23790 | 710.0 | 20.1 | |
| | | | | 23824 | 713.5 | 19.7 | |
| | | 10 MHz | 50 | 0 | 23780 | 709.0 | 18.7 |
| | | | | | 23790 | 710.0 | 19.2 |
| | | | | | 23800 | 711.0 | 19.2 |
| | 25 | | 12 | 23780 | 709.0 | 18.8 | |
| | | | | 23790 | 710.0 | 18.8 | |
| | | | | 23800 | 711.0 | 19.0 | |
| | 1 | | 0 | 23780 | 709.0 | 19.9 | |
| | | | | 23790 | 710.0 | 19.9 | |
| | | | | 23800 | 711.0 | 19.6 | |
| | 1 | 24 | 23780 | 709.0 | 19.9 | | |
| | | | 23790 | 710.0 | 19.9 | | |
| | | | 23800 | 711.0 | 19.9 | | |
| | 16QAM | 5 MHz | 25 | 0 | 23755 | 706.5 | 17.5 |
| | | | | | 23790 | 710.0 | 17.7 |
| | | | | | 23824 | 713.5 | 17.6 |
| | | | 12 | 6 | 23755 | 706.5 | 18.0 |
| | | | | | 23790 | 710.0 | 18.0 |
| | | | | | 23824 | 713.5 | 17.6 |
| 1 | | | 0 | 23755 | 706.5 | 18.7 | |
| | | | | 23790 | 710.0 | 19.0 | |
| | | | | 23824 | 713.5 | 18.5 | |
| 1 | | 24 | 23755 | 706.5 | 19.0 | | |
| | | | 23790 | 710.0 | 18.8 | | |
| | | | 23824 | 713.5 | 18.7 | | |

| Band | Modulation | Bandwidth | RB Size | RB Offset | Channel | Frequency | Power | |
|------|------------|-----------|---------|-----------|---------|-----------|--------|------|
| 17 | 16QAM | 10 MHz | 50 | 0 | 23780 | 709.0 | 17.7 | |
| | | | | | 23790 | 710.0 | 17.9 | |
| | | | | | 23800 | 711.0 | 17.6 | |
| | | | 25 | 12 | 23780 | 709.0 | 17.5 | |
| | | | | | 23790 | 710.0 | 17.7 | |
| | | | | | 23800 | 711.0 | 18.0 | |
| | | | 1 | 0 | 23780 | 709.0 | 18.7 | |
| | | | | | 23790 | 710.0 | 19.0 | |
| | | | | | 23800 | 711.0 | 18.5 | |
| | | | 1 | 24 | 23780 | 709.0 | 18.8 | |
| | | | | | 23790 | 710.0 | 18.7 | |
| | | | | | 23800 | 711.0 | 19.1 | |
| 30 | QPSK | 5 MHz | 25 | 0 | 27685 | 2307.5 | 12.5 | |
| | | | | | 27710 | 2310.0 | 12.0 | |
| | | | | | 27735 | 2312.5 | 12.2 | |
| | | | 12 | 6 | 27685 | 2307.5 | 12.7 | |
| | | | | | 27710 | 2310.0 | 12.3 | |
| | | | | | 27735 | 2312.5 | 12.3 | |
| | | | 1 | 0 | 27685 | 2307.5 | 13.4 | |
| | | | | | 27710 | 2310.0 | 13.3 | |
| | | | | | 27735 | 2312.5 | 13.1 | |
| | | 1 | 24 | 27685 | 2307.5 | 13.7 | | |
| | | | | 27710 | 2310.0 | 13.4 | | |
| | | | | 27735 | 2312.5 | 13.6 | | |
| | | 10 MHz | | 50 | 0 | 27710 | 2310.0 | 12.4 |
| | | | | 25 | 12 | 27710 | 2310.0 | 12.7 |
| | | | | 1 | 0 | 27710 | 2310.0 | 13.5 |
| 1 | 24 | | | 27710 | 2310.0 | 13.1 | | |

| Band | Modulation | Bandwidth | RB Size | RB Offset | Channel | Frequency | Power |
|------|------------|-----------|---------|-----------|---------|-----------|-------|
| 30 | 16QAM | 5 MHz | 25 | 0 | 27685 | 2307.5 | 11.2 |
| | | | | | 27710 | 2310.0 | 11.3 |
| | | | | | 27735 | 2312.5 | 11.5 |
| | | | 12 | 6 | 27685 | 2307.5 | 11.6 |
| | | | | | 27710 | 2310.0 | 11.5 |
| | | | | | 27735 | 2312.5 | 11.4 |
| | | | 1 | 0 | 27685 | 2307.5 | 12.5 |
| | | | | | 27710 | 2310.0 | 12.0 |
| | | | | | 27735 | 2312.5 | 12.4 |
| | | 1 | 24 | 27685 | 2307.5 | 12.5 | |
| | | | | 27710 | 2310.0 | 12.7 | |
| | | | | 27735 | 2312.5 | 12.5 | |
| | | 10 MHz | 50 | 0 | 27710 | 2310.0 | 11.1 |
| | | | 25 | 12 | 27710 | 2310.0 | 11.6 |
| | | | 1 | 0 | 27710 | 2310.0 | 12.2 |
| | | | 1 | 24 | 27710 | 2310.0 | 12.4 |

| Band | Modulation | Bandwidth | RB Size | RB Offset | Channel | Frequency | Power |
|------|------------|-----------|---------|-----------|---------|-----------|-------|
| 66 | QPSK | 1.4 MHz | 6 | 0 | 131979 | 1710.7 | 14.4 |
| | | | | | 132322 | 1745.0 | 14.1 |
| | | | | | 132665 | 1779.3 | 14.2 |
| | | | 3 | 1 | 131979 | 1710.7 | 14.6 |
| | | | | | 132322 | 1745.0 | 14.2 |
| | | | | | 132665 | 1779.3 | 14.6 |
| | | | 1 | 0 | 131979 | 1710.7 | 15.0 |
| | | | | | 132322 | 1745.0 | 15.6 |
| | | | | | 132665 | 1779.3 | 15.5 |
| | | | 1 | 5 | 131979 | 1710.7 | 15.3 |
| | | | | | 132322 | 1745.0 | 15.4 |
| | | | | | 132665 | 1779.3 | 15.3 |
| | | 3 MHz | 15 | 0 | 131987 | 1711.5 | 14.5 |
| | | | | | 132322 | 1745.0 | 14.7 |
| | | | | | 132657 | 1778.5 | 14.5 |
| | | | 8 | 3 | 131987 | 1711.5 | 14.6 |
| | | | | | 132322 | 1745.0 | 14.6 |
| | | | | | 132657 | 1778.5 | 14.6 |
| | | | 1 | 0 | 131987 | 1711.5 | 15.4 |
| | | | | | 132322 | 1745.0 | 15.1 |
| | | | | | 132657 | 1778.5 | 15.1 |
| | | | 1 | 14 | 131987 | 1711.5 | 15.5 |
| | | | | | 132322 | 1745.0 | 15.1 |
| | | | | | 132657 | 1778.5 | 15.1 |
| | | 5 MHz | 25 | 0 | 131997 | 1712.5 | 14.4 |
| | | | | | 132322 | 1745.0 | 14.1 |
| | | | | | 132647 | 1777.5 | 14.4 |
| | | | 12 | 6 | 131997 | 1712.5 | 14.0 |
| | | | | | 132322 | 1745.0 | 14.6 |
| | | | | | 132647 | 1777.5 | 14.3 |
| 1 | 0 | | 131997 | 1712.5 | 15.4 | | |
| | | | 132322 | 1745.0 | 15.7 | | |
| | | | 132647 | 1777.5 | 15.3 | | |
| 1 | 24 | | 131997 | 1712.5 | 15.6 | | |
| | | | 132322 | 1745.0 | 15.2 | | |
| | | | 132647 | 1777.5 | 15.3 | | |

| Band | Modulation | Bandwidth | RB Size | RB Offset | Channel | Frequency | Power |
|------|------------|-----------|---------|-----------|---------|-----------|-------|
| 66 | QPSK | 10 MHz | 50 | 0 | 132022 | 1715.0 | 14.5 |
| | | | | | 132322 | 1745.0 | 14.7 |
| | | | | | 132622 | 1775.0 | 14.3 |
| | | | 25 | 12 | 132022 | 1715.0 | 14.2 |
| | | | | | 132322 | 1745.0 | 14.2 |
| | | | | | 132622 | 1775.0 | 14.3 |
| | | | 1 | 0 | 132022 | 1715.0 | 15.4 |
| | | | | | 132322 | 1745.0 | 15.5 |
| | | | | | 132622 | 1775.0 | 15.5 |
| | | 1 | 24 | 132022 | 1715.0 | 15.1 | |
| | | | | 132322 | 1745.0 | 15.2 | |
| | | | | 132622 | 1775.0 | 15.0 | |
| | | 15 MHz | 75 | 0 | 132047 | 1717.5 | 14.5 |
| | | | | | 132322 | 1745.0 | 14.5 |
| | | | | | 132597 | 1772.5 | 14.3 |
| | | | 36 | 19 | 132047 | 1717.5 | 14.7 |
| | | | | | 132322 | 1745.0 | 14.1 |
| | | | | | 132597 | 1772.5 | 14.6 |
| | | | 1 | 0 | 132047 | 1717.5 | 15.1 |
| | | | | | 132322 | 1745.0 | 15.3 |
| | | | | | 132597 | 1772.5 | 15.6 |
| | | 1 | 74 | 132047 | 1717.5 | 15.2 | |
| | | | | 132322 | 1745.0 | 15.1 | |
| | | | | 132597 | 1772.5 | 15.6 | |
| | | 20 MHz | 100 | 0 | 132072 | 1720.0 | 14.0 |
| | | | | | 132322 | 1745.0 | 14.2 |
| | | | | | 132572 | 1770.0 | 14.6 |
| | | | 50 | 25 | 132072 | 1720.0 | 14.2 |
| | | | | | 132322 | 1745.0 | 14.7 |
| | | | | | 132572 | 1770.0 | 14.2 |
| 1 | 49 | | 132072 | 1720.0 | 15.7 | | |
| | | | 132322 | 1745.0 | 15.4 | | |
| | | | 132572 | 1770.0 | 15.0 | | |
| 1 | 99 | 132072 | 1720.0 | 15.7 | | | |
| | | 132322 | 1745.0 | 15.1 | | | |
| | | 132572 | 1770.0 | 15.4 | | | |

| Band | Modulation | Bandwidth | RB Size | RB Offset | Channel | Frequency | Power |
|------|------------|-----------|---------|-----------|---------|-----------|-------|
| 66 | 16QAM | 1.4 MHz | 6 | 0 | 131979 | 1710.7 | 13.2 |
| | | | | | 132322 | 1745.0 | 13.4 |
| | | | | | 132665 | 1779.3 | 13.5 |
| | | | 3 | 1 | 131979 | 1710.7 | 13.5 |
| | | | | | 132322 | 1745.0 | 13.4 |
| | | | | | 132665 | 1779.3 | 13.6 |
| | | | 1 | 0 | 131979 | 1710.7 | 14.3 |
| | | | | | 132322 | 1745.0 | 14.0 |
| | | | | | 132665 | 1779.3 | 14.1 |
| | | | 1 | 5 | 131979 | 1710.7 | 14.6 |
| | | | | | 132322 | 1745.0 | 14.7 |
| | | | | | 132665 | 1779.3 | 14.6 |
| | | 3 MHz | 15 | 0 | 131987 | 1711.5 | 13.0 |
| | | | | | 132322 | 1745.0 | 13.3 |
| | | | | | 132657 | 1778.5 | 13.2 |
| | | | 8 | 3 | 131987 | 1711.5 | 13.4 |
| | | | | | 132322 | 1745.0 | 13.2 |
| | | | | | 132657 | 1778.5 | 13.4 |
| | | | 1 | 0 | 131987 | 1711.5 | 14.5 |
| | | | | | 132322 | 1745.0 | 14.1 |
| | | | | | 132657 | 1778.5 | 14.3 |
| | | | 1 | 14 | 131987 | 1711.5 | 14.2 |
| | | | | | 132322 | 1745.0 | 14.2 |
| | | | | | 132657 | 1778.5 | 14.6 |
| | | 5 MHz | 25 | 0 | 131997 | 1712.5 | 13.5 |
| | | | | | 132322 | 1745.0 | 13.2 |
| | | | | | 132647 | 1777.5 | 13.2 |
| | | | 12 | 6 | 131997 | 1712.5 | 13.3 |
| | | | | | 132322 | 1745.0 | 13.7 |
| | | | | | 132647 | 1777.5 | 13.6 |
| | | | 1 | 0 | 131997 | 1712.5 | 14.1 |
| | | | | | 132322 | 1745.0 | 14.3 |
| | | | | | 132647 | 1777.5 | 14.6 |
| | | | 1 | 24 | 131997 | 1712.5 | 14.0 |
| | | | | | 132322 | 1745.0 | 14.1 |
| | | | | | 132647 | 1777.5 | 14.4 |

| Band | Modulation | Bandwidth | RB Size | RB Offset | Channel | Frequency | Power |
|------|------------|-----------|---------|-----------|---------|-----------|-------|
| 66 | 16QAM | 10 MHz | 50 | 0 | 132022 | 1715.0 | 13.4 |
| | | | | | 132322 | 1745.0 | 13.5 |
| | | | | | 132622 | 1775.0 | 13.1 |
| | | | 25 | 12 | 132022 | 1715.0 | 13.4 |
| | | | | | 132322 | 1745.0 | 13.3 |
| | | | | | 132622 | 1775.0 | 13.6 |
| | | | 1 | 0 | 132022 | 1715.0 | 14.4 |
| | | | | | 132322 | 1745.0 | 14.1 |
| | | | | | 132622 | 1775.0 | 14.5 |
| | | 1 | 24 | 132022 | 1715.0 | 14.6 | |
| | | | | 132322 | 1745.0 | 14.5 | |
| | | | | 132622 | 1775.0 | 14.5 | |
| | | 15 MHz | 75 | 0 | 132047 | 1717.5 | 13.6 |
| | | | | | 132322 | 1745.0 | 13.6 |
| | | | | | 132597 | 1772.5 | 13.5 |
| | | | 36 | 19 | 132047 | 1717.5 | 13.5 |
| | | | | | 132322 | 1745.0 | 13.3 |
| | | | | | 132597 | 1772.5 | 13.4 |
| | | | 1 | 0 | 132047 | 1717.5 | 14.6 |
| | | | | | 132322 | 1745.0 | 14.6 |
| | | | | | 132597 | 1772.5 | 14.4 |
| | | 1 | 74 | 132047 | 1717.5 | 14.4 | |
| | | | | 132322 | 1745.0 | 14.7 | |
| | | | | 132597 | 1772.5 | 14.4 | |
| | | 20 MHz | 100 | 0 | 132072 | 1720.0 | 13.2 |
| | | | | | 132322 | 1745.0 | 13.3 |
| | | | | | 132572 | 1770.0 | 13.2 |
| | | | 50 | 25 | 132072 | 1720.0 | 13.6 |
| | | | | | 132322 | 1745.0 | 13.2 |
| | | | | | 132572 | 1770.0 | 13.4 |
| 1 | 0 | | 132072 | 1720.0 | 14.6 | | |
| | | | 132322 | 1745.0 | 14.2 | | |
| | | | 132572 | 1770.0 | 14.1 | | |
| 1 | 99 | 132072 | 1720.0 | 14.6 | | | |
| | | 132322 | 1745.0 | 14.0 | | | |
| | | 132572 | 1770.0 | 14.4 | | | |

| Band | Modulation | Bandwidth | RB Size | RB Offset | Channel | Frequency | Power |
|------|------------|-----------|---------|-----------|---------|-----------|-------|
| 38 | QPSK | 5 MHz | 25 | 0 | 37775 | 2572.5 | 14.5 |
| | | | | | 38000 | 2595.0 | 15.2 |
| | | | | | 38225 | 2617.5 | 15.1 |
| | | | 12 | 6 | 37775 | 2572.5 | 15.0 |
| | | | | | 38000 | 2595.0 | 14.5 |
| | | | | | 38225 | 2617.5 | 14.8 |
| | | | 1 | 0 | 37775 | 2572.5 | 15.6 |
| | | | | | 38000 | 2595.0 | 16.0 |
| | | | | | 38225 | 2617.5 | 15.7 |
| | | | 1 | 24 | 37775 | 2572.5 | 15.9 |
| | | | | | 38000 | 2595.0 | 15.9 |
| | | | | | 38225 | 2617.5 | 16.1 |

| Band | Modulation | Bandwidth | RB Size | RB Offset | Channel | Frequency | Power |
|------|------------|-----------|---------|-----------|---------|-----------|-------|
| 38 | QPSK | 10 MHz | 50 | 0 | 37800 | 2575.0 | 14.8 |
| | | | | | 38000 | 2595.0 | 15.1 |
| | | | | | 38200 | 2615.0 | 14.5 |
| | | | 25 | 12 | 37800 | 2575.0 | 15.0 |
| | | | | | 38000 | 2595.0 | 14.8 |
| | | | | | 38200 | 2615.0 | 14.7 |
| | | | 1 | 0 | 37800 | 2575.0 | 16.0 |
| | | | | | 38000 | 2595.0 | 15.8 |
| | | | | | 38200 | 2615.0 | 15.8 |
| | | 1 | 24 | 37800 | 2575.0 | 15.8 | |
| | | | | 38000 | 2595.0 | 15.7 | |
| | | | | 38200 | 2615.0 | 15.9 | |
| | | 15 MHz | 75 | 0 | 37825 | 2577.5 | 14.5 |
| | | | | | 38000 | 2595.0 | 15.1 |
| | | | | | 38175 | 2612.5 | 14.6 |
| | | | 36 | 19 | 37825 | 2577.5 | 15.1 |
| | | | | | 38000 | 2595.0 | 14.7 |
| | | | | | 38175 | 2612.5 | 14.5 |
| | | | 1 | 0 | 37825 | 2577.5 | 15.5 |
| | | | | | 38000 | 2595.0 | 15.9 |
| | | | | | 38175 | 2612.5 | 15.8 |
| | | 1 | 74 | 37825 | 2577.5 | 16.0 | |
| | | | | 38000 | 2595.0 | 16.0 | |
| | | | | 38175 | 2612.5 | 15.8 | |
| | | 20 MHz | 100 | 0 | 37850 | 2580.0 | 14.7 |
| | | | | | 38000 | 2595.0 | 14.6 |
| | | | | | 38150 | 2610.0 | 14.6 |
| | | | 50 | 25 | 37850 | 2580.0 | 14.6 |
| | | | | | 38000 | 2595.0 | 14.9 |
| | | | | | 38150 | 2610.0 | 15.1 |
| | | | 1 | 0 | 37850 | 2580.0 | 16.0 |
| | | | | | 38000 | 2595.0 | 15.7 |
| | | | | | 38150 | 2610.0 | 16.0 |
| | | 1 | 99 | 37850 | 2580.0 | 15.6 | |
| | | | | 38000 | 2595.0 | 16.1 | |
| | | | | 38150 | 2610.0 | 15.7 | |

| Band | Modulation | Bandwidth | RB Size | RB Offset | Channel | Frequency | Power |
|------|------------|-----------|---------|-----------|---------|-----------|-------|
| 38 | 16QAM | 5 MHz | 25 | 0 | 37775 | 2572.5 | 14.2 |
| | | | | | 38000 | 2595.0 | 14.0 |
| | | | | | 38225 | 2617.5 | 13.8 |
| | | | 12 | 6 | 37775 | 2572.5 | 13.7 |
| | | | | | 38000 | 2595.0 | 13.7 |
| | | | | | 38225 | 2617.5 | 13.6 |
| | | | 1 | 0 | 37775 | 2572.5 | 14.6 |
| | | | | | 38000 | 2595.0 | 14.7 |
| | | | | | 38225 | 2617.5 | 15.2 |
| | | | 1 | 24 | 37775 | 2572.5 | 14.9 |
| | | | | | 38000 | 2595.0 | 14.6 |
| | | | | | 38225 | 2617.5 | 15.1 |

| Band | Modulation | Bandwidth | RB Size | RB Offset | Channel | Frequency | Power |
|------|------------|-----------|---------|-----------|---------|-----------|-------|
| 38 | 16QAM | 10 MHz | 50 | 0 | 37800 | 2575.0 | 13.7 |
| | | | | | 38000 | 2595.0 | 13.9 |
| | | | | | 38200 | 2615.0 | 13.6 |
| | | | 25 | 12 | 37800 | 2575.0 | 13.8 |
| | | | | | 38000 | 2595.0 | 14.0 |
| | | | | | 38200 | 2615.0 | 14.1 |
| | | | 1 | 0 | 37800 | 2575.0 | 14.5 |
| | | | | | 38000 | 2595.0 | 14.9 |
| | | | | | 38200 | 2615.0 | 14.6 |
| | | | 1 | 24 | 37800 | 2575.0 | 14.7 |
| | | | | | 38000 | 2595.0 | 14.9 |
| | | | | | 38200 | 2615.0 | 15.0 |
| | | 15 MHz | 75 | 0 | 37825 | 2577.5 | 13.6 |
| | | | | | 38000 | 2595.0 | 13.6 |
| | | | | | 38175 | 2612.5 | 13.7 |
| | | | 36 | 19 | 37825 | 2577.5 | 14.0 |
| | | | | | 38000 | 2595.0 | 14.1 |
| | | | | | 38175 | 2612.5 | 13.5 |
| | | | 1 | 0 | 37825 | 2577.5 | 14.7 |
| | | | | | 38000 | 2595.0 | 14.9 |
| | | | | | 38175 | 2612.5 | 15.1 |
| | | | 1 | 74 | 37825 | 2577.5 | 14.8 |
| | | | | | 38000 | 2595.0 | 15.1 |
| | | | | | 38175 | 2612.5 | 14.7 |
| | | 20 MHz | 100 | 0 | 37850 | 2580.0 | 13.6 |
| | | | | | 38000 | 2595.0 | 13.9 |
| | | | | | 38150 | 2610.0 | 13.5 |
| | | | 50 | 25 | 37850 | 2580.0 | 14.2 |
| | | | | | 38000 | 2595.0 | 13.7 |
| | | | | | 38150 | 2610.0 | 14.0 |
| | | | 1 | 0 | 37850 | 2580.0 | 15.1 |
| | | | | | 38000 | 2595.0 | 14.7 |
| | | | | | 38150 | 2610.0 | 14.8 |
| | | | 1 | 99 | 37850 | 2580.0 | 14.9 |
| | | | | | 38000 | 2595.0 | 14.8 |
| | | | | | 38150 | 2610.0 | 14.6 |

| Antenna | Operation Mode | Lid Angle | LTE Band 7 |
|---------|----------------|-----------|------------|
| WWAN | Lid Close | 0° | 0.0 |
| | | 1° | 0.0 |
| | | 2° | 0.0 |
| | | 3° | 0.0 |
| | | 4° | 0.0 |
| | | 5° | 0.0 |
| | | 6° | 0.0 |
| | | 7° | 0.0 |
| | | 8° | 0.0 |
| | | 9° | 16.1 |
| | 10° | 16.1 | |
| | Laptop Mode | 11° | 16.1 |
| | | 12° | 16.1 |
| | | 13° | 16.1 |
| | | 14° | 16.1 |
| | | 15° | 16.1 |
| | | 25° | 16.1 |
| | | 35° | 16.1 |
| | | 45° | 16.1 |
| | | 55° | 16.1 |
| | | 65° | 16.1 |
| | | 75° | 16.1 |
| | | 85° | 16.1 |
| | | 95° | 16.1 |
| | | 105° | 16.1 |
| | | 115° | 16.1 |
| | | 125° | 16.1 |
| | | 135° | 16.1 |
| | | 145° | 16.1 |
| | | 155° | 16.1 |
| | | 165° | 16.1 |
| | | 175° | 16.1 |
| | | 185° | 16.1 |
| 186° | | 16.1 | |
| 187° | 16.1 | | |
| 188° | 16.1 | | |
| 189° | 14.2 | | |
| 190° | 14.2 | | |

| Antenna | Operation Mode | Lid Angle | LTE Band 7 |
|---------|----------------|-----------|------------|
| WWAN | Tablet Mode | 191° | 14.2 |
| | | 192° | 14.2 |
| | | 193° | 14.2 |
| | | 194° | 14.2 |
| | | 195° | 14.2 |
| | | 205° | 14.2 |
| | | 215° | 14.2 |
| | | 225° | 14.2 |
| | | 235° | 14.2 |
| | | 245° | 14.2 |
| | | 255° | 14.2 |
| | | 265° | 14.2 |
| | | 275° | 14.2 |
| | | 285° | 14.2 |
| | | 295° | 14.2 |
| | | 305° | 14.2 |
| | | 315° | 14.2 |
| | | 325° | 14.2 |
| | | 335° | 14.2 |
| | | 345° | 14.2 |
| 355° | 14.2 | | |
| 356° | 14.2 | | |
| 357° | 14.2 | | |
| 358° | 14.2 | | |
| 359° | 14.2 | | |
| 360° | 14.2 | | |

| Antenna | Operation Mode | Lid Angle | LTE Band 7 |
|---------|----------------|-----------|------------|
| WWAN | Book Mode | 11° | 14.2 |
| | | 12° | 14.2 |
| | | 13° | 14.2 |
| | | 14° | 14.2 |
| | | 15° | 14.2 |
| | | 25° | 14.2 |
| | | 35° | 14.2 |
| | | 45° | 14.2 |
| | | 55° | 14.2 |
| | | 65° | 14.2 |
| | | 75° | 14.2 |
| | | 85° | 14.2 |
| | | 95° | 14.2 |
| | | 105° | 14.2 |
| | | 115° | 14.2 |
| | | 125° | 14.2 |
| | | 135° | 14.2 |
| | | 145° | 14.2 |
| | | 155° | 14.2 |
| | | 165° | 14.2 |
| | | 175° | 14.2 |
| | | 185° | 14.2 |
| | | 195° | 14.2 |
| | | 205° | 14.2 |
| | | 215° | 14.2 |
| | | 225° | 14.2 |
| | | 235° | 14.2 |
| | | 245° | 14.2 |
| | | 255° | 14.2 |
| | | 265° | 14.2 |
| | | 275° | 14.2 |
| | | 285° | 14.2 |
| | | 295° | 14.2 |
| | | 305° | 14.2 |
| | | 315° | 14.2 |
| | | 325° | 14.2 |
| 335° | 14.2 | | |
| 345° | 14.2 | | |
| 355° | 14.2 | | |
| 356° | 14.2 | | |
| 357° | 14.2 | | |
| 358° | 14.2 | | |
| 359° | 14.2 | | |
| 360° | 14.2 | | |

| Antenna | Operation Mode | Lid Angle | LTE Band 7 |
|---------|----------------|-----------|------------|
| WWAN | Book Mode | 360° | 14.2 |
| | | 359° | 14.2 |
| | | 358° | 14.2 |
| | | 357° | 14.2 |
| | | 356° | 14.2 |
| | | 355° | 14.2 |
| | | 345° | 14.2 |
| | | 335° | 14.2 |
| | | 325° | 14.2 |
| | | 315° | 14.2 |
| | | 305° | 14.2 |
| | | 295° | 14.2 |
| | | 285° | 17.3 |
| | | 275° | 14.2 |
| | | 265° | 14.2 |
| | | 255° | 14.2 |
| | | 245° | 14.2 |
| | | 235° | 14.2 |
| | | 225° | 14.2 |
| | | 215° | 14.2 |
| | | 205° | 14.2 |
| | | 195° | 14.2 |
| | | 185° | 14.2 |
| | | 175° | 14.2 |
| | | 165° | 14.2 |
| | | 155° | 14.2 |
| | | 145° | 14.2 |
| | | 135° | 14.2 |
| | | 125° | 14.2 |
| | | 115° | 14.2 |
| 105° | 14.2 | | |
| 95° | 14.2 | | |
| 85° | 14.2 | | |
| 75° | 14.2 | | |
| 65° | 14.2 | | |
| 55° | 14.2 | | |
| 45° | 14.2 | | |
| 35° | 14.2 | | |
| 25° | 14.2 | | |
| 15° | 14.2 | | |
| 14° | 14.2 | | |
| 13° | 14.2 | | |
| 12° | 14.2 | | |
| 11° | 0.0 | | |

| Antenna | Operation Mode | Lid Angle | LTE Band 7 |
|---------|----------------|-----------|------------|
| WWAN | Tablet Mode | 360° | 14.2 |
| | | 359° | 14.2 |
| | | 358° | 14.2 |
| | | 357° | 14.2 |
| | | 356° | 14.2 |
| | | 355° | 14.2 |
| | | 345° | 14.2 |
| | | 335° | 14.2 |
| | | 325° | 14.2 |
| | | 315° | 14.2 |
| | | 305° | 14.2 |
| | | 295° | 14.2 |
| | | 285° | 14.2 |
| | | 275° | 14.2 |
| | | 265° | 14.2 |
| | | 255° | 14.2 |
| | | 245° | 14.2 |
| | | 235° | 14.2 |
| | | 225° | 14.2 |
| | | 215° | 14.2 |
| 205° | 14.2 | | |
| 195° | 14.2 | | |
| 194° | 14.2 | | |
| 193° | 14.2 | | |
| 192° | 16.1 | | |
| 191° | 16.1 | | |

| Antenna | Operation Mode | Lid Angle | LTE Band 7 |
|---------|----------------|-----------|------------|
| WWAN | Laptop Mode | 190° | 16.1 |
| | | 189° | 16.1 |
| | | 188° | 16.1 |
| | | 187° | 16.1 |
| | | 186° | 16.1 |
| | | 185° | 16.1 |
| | | 175° | 16.1 |
| | | 165° | 16.1 |
| | | 155° | 16.1 |
| | | 145° | 16.1 |
| | | 135° | 16.1 |
| | | 125° | 16.1 |
| | | 115° | 16.1 |
| | | 105° | 16.1 |
| | | 95° | 16.1 |
| | | 85° | 16.1 |
| | | 75° | 16.1 |
| | | 65° | 16.1 |
| | | 55° | 16.1 |
| | | 45° | 16.1 |
| | | 35° | 16.1 |
| | | 25° | 16.1 |
| | | 15° | 16.1 |
| | 14° | 16.1 | |
| | 13° | 16.1 | |
| | 12° | 16.1 | |
| | 11° | 0.0 | |
| | Lid Close | 11° | 0.0 |
| | | 10° | 0.0 |
| | | 9° | 0.0 |
| | | 8° | 0.0 |
| | | 7° | 0.0 |
| | | 6° | 0.0 |
| 5° | | 0.0 | |
| 4° | | 0.0 | |
| 3° | | 0.0 | |
| 2° | | 0.0 | |
| 1° | 0.0 | | |

Table 11.5.2 Test Reduction Table – LTE

| Band/ Frequency (MHz) | Side | Required Test Channel | Bandwidth | Modulation | RB Allocation | RB Offset | Tested/ Reduced | | |
|--|--|--------------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| Band 25 1850-1915 MHz | Back | 26140 | 20 MHz | QPSK | 50 | 0 | Reduced ⁷ | | |
| | | 26365 | | | | | Tested | | |
| | | 26590 | | | | | Reduced ⁷ | | |
| | | 26140 | | | | | Reduced ¹ | | |
| | | 26365 | | | 100 | 0 | Reduced ¹ | | |
| | | 26590 | | | | | Reduced ¹ | | |
| | | 26140 | | | | | Reduced ¹ | | |
| | | 26365 | | | | | Tested | | |
| | | 26590 | | | 1 | 49 | Tested | | |
| | | 26140 | | | | | Tested | | |
| | | 26365 | | | | | Reduced ² | | |
| | | 26590 | | | | | Reduced ² | | |
| | | 26140 | | 99 | 99 | Reduced ² | | | |
| | | 26365 | | | | Reduced ² | | | |
| | | 26590 | | | | Reduced ² | | | |
| | | 26140 | | | | Reduced ³ | | | |
| | | 26365 | | 50 | 25 | 16QAM | Reduced ³ | | |
| | | 26590 | | | | | Reduced ³ | | |
| | | 26140 | | | | | Reduced ¹ | | |
| | | 26365 | | | | | Reduced ¹ | | |
| | | 26590 | | 100 | 0 | Reduced ¹ | | | |
| | | 26140 | | | | Reduced ¹ | | | |
| | | 26365 | | | | Reduced ¹ | | | |
| | | 26590 | | | | Reduced ¹ | | | |
| | 26140 | 1 | 0 | 16QAM | Reduced ⁴ | | | | |
| | 26365 | | | | Reduced ⁴ | | | | |
| | 26590 | | | | Reduced ⁴ | | | | |
| | 26140 | | | | Reduced ⁴ | | | | |
| | 26365 | 99 | 99 | Reduced ⁴ | | | | | |
| | 26590 | | | Reduced ⁴ | | | | | |
| | 26140 | | | Reduced ⁴ | | | | | |
| | 26365 | | | Reduced ⁴ | | | | | |
| | All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz) | | | | | | | Reduced ⁵ | |
| | Top | QPSK | 26140 | 20 MHz | 50 | 25 | Reduced ¹ | | |
| | | | 26365 | | | | Tested | | |
| | | | 26590 | | | | Reduced ¹ | | |
| | | | 26140 | | | | Reduced ¹ | | |
| | | | 26365 | | | | 100 | 0 | Reduced ¹ |
| | | | 26590 | | | | | | Reduced ¹ |
| | | | 26140 | | Reduced ¹ | | | | |
| | | | 26365 | | Tested | | | | |
| | | | 26590 | | 1 | 0 | | | Reduced ¹ |
| | | | 26140 | | | | | | Reduced ² |
| | | | 26365 | | | | Reduced ² | | |
| | | | 26590 | | | | Reduced ² | | |
| | | 26140 | 99 | | | | 99 | Reduced ² | |
| | | 26365 | | | | | | Reduced ² | |
| | | 26590 | | | Reduced ³ | | | | |
| 26140 | | Reduced ³ | | | | | | | |
| 26365 | | 50 | | | 25 | 16QAM | | Reduced ³ | |
| 26590 | | | | | | | | Reduced ³ | |
| 26140 | | | Reduced ¹ | | | | | | |
| 26365 | | | Reduced ¹ | | | | | | |
| 26590 | | | 100 | | | | 0 | Reduced ¹ | |
| 26140 | | | | | | | | Reduced ¹ | |
| 26365 | | Reduced ¹ | | | | | | | |
| 26590 | | Reduced ⁴ | | | | | | | |
| 26140 | 1 | 0 | | Reduced ⁴ | | | | | |
| 26365 | | | | Reduced ⁴ | | | | | |
| 26590 | | | Reduced ⁴ | | | | | | |
| 26140 | | | 99 | 99 | Reduced ⁴ | | | | |
| 26365 | | | | | Reduced ⁴ | | | | |
| 26590 | | | | | Reduced ⁴ | | | | |
| 26140 | Reduced ⁴ | | | | | | | | |
| 26365 | Reduced ⁴ | | | | | | | | |
| 26590 | Reduced ⁴ | | | | | | | | |
| All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz) | | | | | | | Reduced ⁵ | | |
| All remaining sides | | | | | | | Reduced ⁶ | | |

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3) A) I) page 4.
 Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3) B) I) page 4.
 Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) A) I) page 4.
 Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) B) I) page 5.
 Reduced⁵- If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.
 Reduced⁶ – When the antenna is more than 25 mm from a side, the test can be reduced per KDB447498 D01 v06 section 4.3.1 1) page 11. See below for calculations.
 Reduced⁷- If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ±0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Maximum Power: 251.2 mW
 Closest Distance to right: 290.0 mm
 Closest Distance to Bottom: 140 mm

$$[(3.0/(\sqrt{1.915})) * 50 \text{ mm}] + [(140 - 50 \text{ mm}) * 10] = 1008 \text{ mW}$$

which is greater than 251.2 mW

| Band/ Frequency (MHz) | Side | Required Test Channel | Bandwidth | Modulation | RB Allocation | RB Offset | Tested/ Reduced | |
|--|--|--------------------------|-----------|------------|------------------|----------------------|----------------------|----------------------|
| Band 25 1850-1915 MHz | Left | 26140 | 20 MHz | QPSK | 50 | 0 | Reduced ⁷ | |
| | | 26365 | | | | | Tested | |
| | | 26590 | | | | | Reduced ⁷ | |
| | | 26140 | | | 100 | 0 | Reduced ¹ | |
| | | 26365 | | | | | Reduced ¹ | |
| | | 26590 | | | | | Reduced ¹ | |
| | | 26140 | | | 1 | 49 | Tested | |
| | | 26365 | | | | | Tested | |
| | | 26590 | | | | | Tested | |
| | | 26140 | | | 99 | 99 | Reduced ² | |
| | | 26365 | | | | | Reduced ² | |
| | | 26590 | | | | | Reduced ² | |
| | | 26140 | | 50 | 25 | Reduced ³ | | |
| | | 26365 | | | | Reduced ³ | | |
| | | 26590 | | | | Reduced ³ | | |
| | | 26140 | | 100 | 0 | Reduced ¹ | | |
| | | 26365 | | | | Reduced ¹ | | |
| | | 26590 | | | | Reduced ¹ | | |
| | | 26140 | | 1 | 0 | Reduced ⁴ | | |
| | | 26365 | | | | Reduced ⁴ | | |
| | | 26590 | | | | Reduced ⁴ | | |
| | | 26140 | | 99 | 99 | Reduced ⁴ | | |
| | | 26365 | | | | Reduced ⁴ | | |
| | | 26590 | | | | Reduced ⁴ | | |
| | All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz) | | | | | | | Reduced ⁵ |
| | Laptop | QPSK | 26140 | 20 MHz | 50 | 0 | Reduced ⁷ | |
| | | | 26365 | | | | Tested | |
| | | | 26590 | | | | Reduced ⁷ | |
| | | | 26140 | | 100 | 0 | Reduced ¹ | |
| | | | 26365 | | | | Tested | |
| | | | 26590 | | | | Reduced ¹ | |
| | | | 26140 | | 1 | 49 | Tested | |
| | | | 26365 | | | | Tested | |
| | | | 26590 | | | | Tested | |
| | | | 26140 | | 99 | 99 | Reduced ² | |
| | | | 26365 | | | | Reduced ² | |
| | | | 26590 | | | | Reduced ² | |
| | | 26140 | 50 | | 25 | Reduced ³ | | |
| | | 26365 | | | | Reduced ³ | | |
| | | 26590 | | | | Reduced ³ | | |
| | | 26140 | 100 | | 0 | Reduced ¹ | | |
| | | 26365 | | | | Reduced ¹ | | |
| | | 26590 | | | | Reduced ¹ | | |
| | | 26140 | 1 | | 0 | Reduced ⁴ | | |
| | | 26365 | | | | Reduced ⁴ | | |
| | | 26590 | | | | Reduced ⁴ | | |
| | | 26140 | 99 | | 99 | Reduced ⁴ | | |
| | | 26365 | | | | Reduced ⁴ | | |
| 26590 | | Reduced ⁴ | | | | | | |
| All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz) | | | | | | | Reduced ⁵ | |
| All remaining sides | | | | | | | Reduced ⁶ | |

Reduced¹ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3) A) I) page 4.
 Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3) B) I) page 4.
 Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) A) I) page 4.
 Reduced⁴ - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) B) I) page 5.
 Reduced⁵ - If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.
 Reduced⁶ - When the antenna is more than 25 mm from a side, the test can be reduced per KDB447498 D01 v06 section 4.3.1 1) page 11. See below for calculations.
 Reduced⁷ - If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ±0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Maximum Power: 251.2 mW
 Closest Distance to right: 290.0 mm
 Closest Distance to Bottom: 140 mm

$$[[[(3.0)/(\sqrt{1.915})]*50 \text{ mm}]+[(140-50 \text{ mm})*10]=1008 \text{ mW which is greater than } 251.2 \text{ mW}]$$

| Band/ Frequency (MHz) | Side | Required Test Channel | Bandwidth | Modulation | RB Allocation | RB Offset | Tested/ Reduced | |
|--|--|--------------------------|----------------------|----------------------|------------------|--------------|----------------------|----------------------|
| Band 66 1710-1780 MHz | Back | 132072 | 20 MHz | QPSK | 50 | 25 | Tested | |
| | | 132322 | | | | | Tested | |
| | | 132572 | | | | | Tested | |
| | | 132072 | | | 100 | 0 | Reduced ¹ | |
| | | 132322 | | | | | Tested | |
| | | 132572 | | | | | Reduced ¹ | |
| | | 132072 | | | 1 | 49 | Tested | |
| | | 132322 | | | | | Tested | |
| | | 132572 | | | | | Reduced ² | |
| | | 132072 | | | 99 | 99 | Reduced ² | |
| | | 132322 | | | | | Reduced ² | |
| | | 132572 | | | | | Reduced ² | |
| | | 132072 | | | 50 | 25 | Reduced ³ | |
| | | 132322 | | | | | Reduced ³ | |
| | | 132572 | | | | | Reduced ³ | |
| | | 132072 | | | 100 | 0 | Reduced ¹ | |
| | | 132322 | | | | | Reduced ¹ | |
| | | 132572 | | | | | Reduced ¹ | |
| | | 132072 | | | 1 | 49 | Reduced ⁴ | |
| | | 132322 | | | | | Reduced ⁴ | |
| | | 132572 | | | | | Reduced ⁴ | |
| | 132072 | 99 | 99 | Reduced ⁴ | | | | |
| | 132322 | | | Reduced ⁴ | | | | |
| | 132572 | | | Reduced ⁴ | | | | |
| | All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz) | | | | | | | Reduced ⁵ |
| | Top | 20 MHz | 132072 | 20 MHz | QPSK | 50 | 25 | Reduced ⁷ |
| | | | 132322 | | | | | Tested |
| | | | 132572 | | | | | Reduced ⁷ |
| | | | 132072 | | | 100 | 0 | Reduced ¹ |
| | | | 132322 | | | | | Reduced ¹ |
| | | | 132572 | | | | | Reduced ¹ |
| | | | 132072 | | | 1 | 0 | Reduced ⁷ |
| | | | 132322 | | | | | Tested |
| | | | 132572 | | | | | Reduced ⁷ |
| | | | 132072 | | | 99 | 99 | Reduced ² |
| | | | 132322 | | | | | Reduced ² |
| | | | 132572 | | | | | Reduced ² |
| | | | 132072 | | | 50 | 25 | Reduced ³ |
| | | | 132322 | | | | | Reduced ³ |
| | | | 132572 | | | | | Reduced ³ |
| | | | 132072 | | | 100 | 0 | Reduced ¹ |
| | | | 132322 | | | | | Reduced ¹ |
| 132572 | | | Reduced ¹ | | | | | |
| 132072 | | | 1 | | | 0 | Reduced ⁴ | |
| 132322 | | | | | | | Reduced ⁴ | |
| 132572 | | | | | | | Reduced ⁴ | |
| 132072 | 99 | 99 | Reduced ⁴ | | | | | |
| 132322 | | | Reduced ⁴ | | | | | |
| 132572 | | | Reduced ⁴ | | | | | |
| All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz) | | | | | | | Reduced ⁵ | |
| All remaining sides | | | | | | | Reduced ⁶ | |

Reduced¹ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3) A) I) page 4.
 Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3) B) I) page 4.
 Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) A) I) page 4.
 Reduced⁴ - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) B) I) page 5.
 Reduced⁵ - If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.
 Reduced⁶ - When the antenna is more than 25 mm from a side, the test can be reduced per KDB447498 D01 v06 section 4.3.1 1) page 11. See below for calculations.
 Reduced⁷ - If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ±0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Maximum Power: 251.2 mW
 Closest Distance to right: 290.0 mm
 Closest Distance to Bottom: 140 mm

$$[[[(3.0)/(\sqrt{1.78})]*50 \text{ mm}]]+[(140-50 \text{ mm})*10]=1012 \text{ mW which is greater than 251.2 mW}$$

| Band/ Frequency (MHz) | Side | Required Test Channel | Bandwidth | Modulation | RB Allocation | RB Offset | Tested/ Reduced | | | |
|--------------------------|---------------------|--------------------------|--|--|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| Band 66 1710-1780 MHz | Left | 132072 | 20 MHz | QPSK | 50 | 25 | Tested | | | |
| | | 132322 | | | | | Tested | | | |
| | | 132572 | | | | | Tested | | | |
| | | 132072 | | | 100 | 0 | Reduced ¹ | | | |
| | | 132322 | | | | | Reduced ¹ | | | |
| | | 132572 | | | | | Reduced ¹ | | | |
| | | 132072 | | | 1 | 49 | Tested | | | |
| | | 132322 | | | | | Tested | | | |
| | | 132572 | | | | | Tested | | | |
| | | 132072 | | | 99 | | Reduced ² | | | |
| | | 132322 | | | | | Reduced ² | | | |
| | | 132572 | | | | | Reduced ² | | | |
| | | 132072 | | 16QAM | 50 | 25 | Reduced ³ | | | |
| | | 132322 | | | | | Reduced ³ | | | |
| | | 132572 | | | 100 | 0 | Reduced ³ | | | |
| | | 132072 | | | | | Reduced ¹ | | | |
| | | 132322 | | | 1 | 49 | Reduced ¹ | | | |
| | | 132572 | | | | | Reduced ⁴ | | | |
| | | 132072 | | 99 | | Reduced ⁴ | | | | |
| | | 132322 | | | | Reduced ⁴ | | | | |
| | | 132572 | | All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz) | | | | | | Reduced ⁵ |
| | | Laptop | | QPSK | 132072 | 20 MHz | 50 | 25 | Tested | |
| | | | | | 132322 | | | | Tested | |
| | | | | | 132572 | | | | Tested | |
| | 132072 | | 100 | | 0 | | | | Reduced ¹ | |
| | 132322 | | | | | | | | Reduced ¹ | |
| | 132572 | | | | | | | | Reduced ¹ | |
| | 132072 | | 1 | | 0 | | Tested | | | |
| | 132322 | | | | | | Tested | | | |
| | 132572 | | | | | | Tested | | | |
| | 132072 | | 99 | | | | Reduced ² | | | |
| | 132322 | | | | | | Reduced ² | | | |
| | 132572 | | | | | | Reduced ² | | | |
| | 132072 | | 16QAM | 50 | 25 | | Reduced ³ | | | |
| | 132322 | | | | | | Reduced ³ | | | |
| | 132572 | | | 100 | 0 | | Reduced ³ | | | |
| | 132072 | | | | | | Reduced ¹ | | | |
| | 132322 | | | 1 | 0 | | Reduced ¹ | | | |
| | 132572 | | | | | | Reduced ⁴ | | | |
| | 132072 | | 99 | | Reduced ⁴ | | | | | |
| | 132322 | | | | Reduced ⁴ | | | | | |
| | 132572 | | All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz) | | | | | | Reduced ⁵ | |
| | All remaining sides | | | | | | | Reduced ⁶ | | |

Reduced¹ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3) A) I) page 4.
 Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3) B) I) page 4.
 Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) A) I) page 4.
 Reduced⁴ - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) B) I) page 5.
 Reduced⁵ - If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.
 Reduced⁶ - When the antenna is more than 25 mm from a side, the test can be reduced per KDB447498 D01 v06 section 4.3.1 1) page 11. See below for calculations.
 Reduced⁷ - If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ±0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Maximum Power: 251.2 mW
 Closest Distance to right: 290.0 mm
 Closest Distance to Bottom: 140 mm

$(((3.0)/(\sqrt{1.78}))*50 \text{ mm}) + ((140-50 \text{ mm})*10) = 1012 \text{ mW}$ which is greater than 251.2 mW

| Band/ Frequency (MHz) | Side | Required Test Channel | Bandwidth | Modulation | RB Allocation | RB Offset | Tested/ Reduced | |
|------------------------------|------------------------------|--------------------------|----------------------|------------|------------------|----------------------|----------------------|----------------------|
| Band 26 814-849 MHz | Back | 26740 | 15 MHz | QPSK | 25 | 12 | Tested | |
| | | 26865 | | | | | Tested | |
| | | 26990 | | | | | Tested | |
| | | 26740 | | | 50 | 0 | Tested | |
| | | 26865 | | | | | Reduced ¹ | |
| | | 26990 | | | | | Reduced ¹ | |
| | | 26740 | | | 1 | 0 | Tested | |
| | | 26865 | | | | | Reduced ² | |
| | | 26990 | | | | | Reduced ² | |
| | | 26740 | | | 24 | 24 | Reduced ² | |
| | | 26865 | | | | | Reduced ² | |
| | | 26990 | | | | | Reduced ² | |
| | | 26740 | | 16QAM | 25 | 12 | Reduced ³ | |
| | | 26865 | | | | | Reduced ³ | |
| | | 26990 | | | | | Reduced ³ | |
| | | 26740 | | | 50 | 0 | Reduced ¹ | |
| | | 26865 | | | | | Reduced ¹ | |
| | | 26990 | | | | | Reduced ¹ | |
| | | 26740 | | 1 | 0 | Reduced ⁴ | | |
| | | 26865 | | | | Reduced ⁴ | | |
| | | 26990 | | | | Reduced ⁴ | | |
| | | 26740 | | 24 | 24 | Reduced ⁴ | | |
| | | 26865 | | | | Reduced ⁴ | | |
| | | 26990 | | | | Reduced ⁴ | | |
| | All lower bandwidths (5 MHz) | | | | | | | Reduced ⁵ |
| | Top | 15 MHz | 26740 | 15 MHz | QPSK | 25 | 12 | Reduced ⁷ |
| | | | 26865 | | | | | Tested |
| | | | 26990 | | | | | Reduced ⁷ |
| | | | 26740 | | | 50 | 0 | Reduced ¹ |
| | | | 26865 | | | | | Reduced ¹ |
| | | | 26990 | | | | | Reduced ¹ |
| | | | 26740 | | | 1 | 0 | Reduced ⁷ |
| | | | 26865 | | | | | Tested |
| | | | 26990 | | | | | Reduced ⁷ |
| | | | 26740 | | | 24 | 24 | Reduced ² |
| | | | 26865 | | | | | Reduced ² |
| | | | 26990 | | | | | Reduced ² |
| | | | 26740 | | 16QAM | 25 | 12 | Reduced ³ |
| | | | 26865 | | | | | Reduced ³ |
| | | | 26990 | | | | | Reduced ³ |
| | | | 26740 | | | 50 | 0 | Reduced ¹ |
| | | | 26865 | | | | | Reduced ¹ |
| | | | 26990 | | | | | Reduced ¹ |
| | | | 26740 | | 1 | 0 | Reduced ⁴ | |
| | | | 26865 | | | | Reduced ⁴ | |
| | | | 26990 | | | | Reduced ⁴ | |
| | | | 26740 | | 24 | 24 | Reduced ⁴ | |
| | | | 26865 | | | | Reduced ⁴ | |
| 26990 | | | Reduced ⁴ | | | | | |
| All lower bandwidths (5 MHz) | | | | | | | Reduced ⁵ | |
| All remaining sides | | | | | | | Reduced ⁷ | |

Reduced¹ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3) A) I) page 4.
 Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3) B) I) page 4.
 Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) A) I) page 4.
 Reduced⁴ - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) B) I) page 5.
 Reduced⁵ - If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.
 Reduced⁶ - If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ±0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.
 Reduced⁷ - When the antenna is more than 25 mm from a side, the test can be reduced per KDB447498 D01 v06 section 4.3.1 1) page 11. See below for calculations.

Maximum Power: 251.2 mW
 Closest Distance to right: 290.0 mm
 Closest Distance to Bottom: 140 mm

$$[[[(3.0)/(\sqrt{0.849})]^*50 \text{ mm}]]+[(140-50 \text{ mm})^*10]=1062 \text{ mW which is greater than } 251.2 \text{ mW}$$

| Band/ Frequency (MHz) | Side | Required Test Channel | Bandwidth | Modulation | RB Allocation | RB Offset | Tested/ Reduced | |
|------------------------------|------------------------------|--------------------------|----------------------|------------|------------------|----------------------|----------------------|----------------------|
| Band 26 814-849 MHz | Left | 26740 | 15 MHz | QPSK | 25 | 12 | Reduced ⁷ | |
| | | 26865 | | | | | Tested | |
| | | 26990 | | | | | Reduced ⁷ | |
| | | 26740 | | | 50 | 0 | Reduced ¹ | |
| | | 26865 | | | | | Reduced ¹ | |
| | | 26990 | | | | | Reduced ¹ | |
| | | 26740 | | | 1 | 0 | Reduced ⁷ | |
| | | 26865 | | | | | Tested | |
| | | 26990 | | | | | Reduced ⁷ | |
| | | 26740 | | | 24 | 0 | Reduced ² | |
| | | 26865 | | | | | Reduced ² | |
| | | 26990 | | | | | Reduced ² | |
| | | 26740 | | 25 | 12 | Reduced ³ | | |
| | | 26865 | | | | Reduced ³ | | |
| | | 26990 | | | | Reduced ³ | | |
| | | 26740 | | 50 | 0 | Reduced ¹ | | |
| | | 26865 | | | | Reduced ¹ | | |
| | | 26990 | | | | Reduced ¹ | | |
| | | 26740 | | 1 | 0 | Reduced ⁴ | | |
| | | 26865 | | | | Reduced ⁴ | | |
| | | 26990 | | | | Reduced ⁴ | | |
| | | 26740 | | 24 | 0 | Reduced ⁴ | | |
| | | 26865 | | | | Reduced ⁴ | | |
| | | 26990 | | | | Reduced ⁴ | | |
| | All lower bandwidths (5 MHz) | | | | | | | Reduced ⁵ |
| | Laptop | Laptop | 26740 | 15 MHz | QPSK | 25 | 12 | Reduced ⁷ |
| | | | 26865 | | | | | Tested |
| | | | 26990 | | | | | Reduced ⁷ |
| | | | 26740 | | | 50 | 0 | Reduced ¹ |
| | | | 26865 | | | | | Reduced ¹ |
| | | | 26990 | | | | | Reduced ¹ |
| | | | 26740 | | | 1 | 0 | Tested |
| | | | 26865 | | | | | Tested |
| | | | 26990 | | | | | Tested |
| | | | 26740 | | | 24 | 0 | Reduced ² |
| | | | 26865 | | | | | Reduced ² |
| | | | 26990 | | | | | Reduced ² |
| | | | 26740 | | 25 | 12 | Reduced ³ | |
| | | | 26865 | | | | Reduced ³ | |
| | | | 26990 | | | | Reduced ³ | |
| | | | 26740 | | 50 | 0 | Reduced ¹ | |
| | | | 26865 | | | | Reduced ¹ | |
| | | | 26990 | | | | Reduced ¹ | |
| | | | 26740 | | 1 | 0 | Reduced ⁴ | |
| | | | 26865 | | | | Reduced ⁴ | |
| | | | 26990 | | | | Reduced ⁴ | |
| | | | 26740 | | 24 | 0 | Reduced ⁴ | |
| | | | 26865 | | | | Reduced ⁴ | |
| 26990 | | | Reduced ⁴ | | | | | |
| All lower bandwidths (5 MHz) | | | | | | | Reduced ⁵ | |
| All remaining sides | | | | | | | Reduced ⁷ | |

Reduced¹ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3) A) I) page 4.
 Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3) B) I) page 4.
 Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) A) I) page 4.
 Reduced⁴ - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) B) I) page 5.
 Reduced⁵ - If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.
 Reduced⁶ - If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ±0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.
 Reduced⁷ - When the antenna is more than 25 mm from a side, the test can be reduced per KDB447498 D01 v06 section 4.3.1 1) page 11. See below for calculations.

Maximum Power: 251.2 mW
 Closest Distance to right: 290.0 mm
 Closest Distance to Bottom: 140 mm

$$[(((3.0)/(\sqrt{0.849}))^*50 \text{ mm})+[(140-50 \text{ mm})^*10]=1062 \text{ mW which is greater than } 251.2 \text{ mW}$$

| Band/ Frequency (MHz) | Side | Required Test Channel | Bandwidth | Modulation | RB Allocation | RB Offset | Tested/ Reduced | |
|--------------------------|------------------------------|--------------------------|-----------|------------|------------------|--------------|----------------------|----------------------|
| Band 13 777-787 MHz | Back | 23230 | 10 MHz | QPSK | 25 | 12 | Tested | |
| | | 23230 | | | 50 | 0 | Tested | |
| | | 23230 | | | 1 | 0 | Tested | |
| | | 23230 | | | | 24 | Reduced ² | |
| | | 23230 | | 16QAM | 25 | 12 | Reduced ³ | |
| | | 23230 | | | 50 | 0 | Reduced ¹ | |
| | | 23230 | | | 1 | 0 | Reduced ⁴ | |
| | | 23230 | | | | 24 | Reduced ⁴ | |
| | All lower bandwidths (5 MHz) | | | | | | | Reduced ⁵ |
| | Top | 10 MHz | 23230 | QPSK | 25 | 12 | Tested | |
| | | | 23230 | | 50 | 0 | Reduced ² | |
| | | | 23230 | | 1 | 0 | Tested | |
| | | | 23230 | | | 24 | Reduced ² | |
| | | | 23230 | 16QAM | 25 | 12 | Reduced ³ | |
| | | | 23230 | | 50 | 0 | Reduced ¹ | |
| | | | 23230 | | 1 | 0 | Reduced ⁴ | |
| | | | 23230 | | | 24 | Reduced ⁴ | |
| | All lower bandwidths (5 MHz) | | | | | | | Reduced ⁵ |
| | Left | 10 MHz | 23230 | QPSK | 25 | 12 | Tested | |
| | | | 23230 | | 50 | 0 | Reduced ² | |
| | | | 23230 | | 1 | 0 | Tested | |
| | | | 23230 | | | 24 | Reduced ² | |
| | | | 23230 | 16QAM | 25 | 12 | Reduced ³ | |
| | | | 23230 | | 50 | 0 | Reduced ¹ | |
| | | | 23230 | | 1 | 0 | Reduced ⁴ | |
| | | | 23230 | | | 24 | Reduced ⁴ | |
| | All lower bandwidths (5 MHz) | | | | | | | Reduced ⁵ |
| | Laptop | 10 MHz | 23230 | QPSK | 25 | 12 | Tested | |
| | | | 23230 | | 50 | 0 | Reduced ² | |
| | | | 23230 | | 1 | 0 | Tested | |
| | | | 23230 | | | 24 | Reduced ² | |
| | | | 23230 | 16QAM | 25 | 12 | Reduced ³ | |
| | | | 23230 | | 50 | 0 | Reduced ¹ | |
| | | | 23230 | | 1 | 0 | Reduced ⁴ | |
| | | | 23230 | | | 24 | Reduced ⁴ | |
| | All lower bandwidths (5 MHz) | | | | | | | Reduced ⁵ |
| All remaining sides | | | | | | | Reduced ⁷ | |

- Reduced¹ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3) A) I) page 4.
- Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3) B) I) page 4.
- Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) A) I) page 4.
- Reduced⁴ - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) B) I) page 5.
- Reduced⁵ - If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.
- Reduced⁶ - If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ±0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.
- Reduced⁷ - When the antenna is more than 25 mm from a side, the test can be reduced per KDB447498 D01 v06 section 4.3.1 1) page 11. See below for calculations.

Maximum Power: 251.2 mW
 Closest Distance to right: 290.0 mm
 Closest Distance to Bottom: 140 mm

$$[(3.0)/(\sqrt{0.787}) * 50 \text{ mm}] + [(140 - 50 \text{ mm}) * 10] = 1069 \text{ mW which is greater than } 251.2 \text{ mW}$$

| Band/ Frequency (MHz) | Side | Required Test Channel | Bandwidth | Modulation | RB Allocation | RB Offset | Tested/ Reduced | |
|------------------------------|------------------------------|--------------------------|-----------|------------|------------------|----------------------|----------------------|----------------------|
| Band 14 788-798 MHz | Back | 23330 | 10 MHz | QPSK | 25 | 12 | Tested | |
| | | 23330 | | | 50 | 0 | Tested | |
| | | 23330 | | | 1 | 0 | Tested | |
| | | 23330 | | | | 24 | Reduced ² | |
| | | 23330 | | 16QAM | 25 | 12 | Reduced ³ | |
| | | 23330 | | | 50 | 0 | Reduced ¹ | |
| | | 23330 | | | 1 | 0 | Reduced ⁴ | |
| | | 23330 | | | | 24 | Reduced ⁴ | |
| | All lower bandwidths (5 MHz) | | | | | | | Reduced ⁵ |
| | Top | 10 MHz | 23330 | QPSK | 25 | 12 | Tested | |
| | | | 23330 | | 50 | 0 | Reduced ² | |
| | | | 23330 | | 1 | 0 | Tested | |
| | | | 23330 | | | 24 | Reduced ² | |
| | | | 23330 | 16QAM | 25 | 12 | Reduced ³ | |
| | | | 23330 | | 50 | 0 | Reduced ¹ | |
| | | | 23330 | | 1 | 0 | Reduced ⁴ | |
| | | | 23330 | | | 24 | Reduced ⁴ | |
| | All lower bandwidths (5 MHz) | | | | | | | |
| | Left | 10 MHz | 23330 | QPSK | 25 | 12 | Tested | |
| | | | 23330 | | 50 | 0 | Reduced ¹ | |
| | | | 23330 | | 1 | 0 | Tested | |
| | | | 23330 | | | 24 | Reduced ² | |
| | | | 23330 | 16QAM | 25 | 12 | Reduced ³ | |
| | | | 23330 | | 50 | 0 | Reduced ¹ | |
| | | | 23330 | | 1 | 0 | Reduced ⁴ | |
| | | | 23330 | | | 24 | Reduced ⁴ | |
| | All lower bandwidths (5 MHz) | | | | | | | Reduced ⁵ |
| | Laptop | 10 MHz | 23330 | QPSK | 25 | 12 | Tested | |
| | | | 23330 | | 50 | 0 | Reduced ¹ | |
| | | | 23330 | | 1 | 0 | Tested | |
| | | | 23330 | | | 24 | Reduced ² | |
| | | | 23330 | 16QAM | 25 | 12 | Reduced ³ | |
| | | | 23330 | | 50 | 0 | Reduced ¹ | |
| 23330 | | | 1 | | 0 | Reduced ⁴ | | |
| 23330 | | | | | 24 | Reduced ⁴ | | |
| All lower bandwidths (5 MHz) | | | | | | | Reduced ⁵ | |
| All remaining sides | | | | | | | Reduced ⁷ | |

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3) A) I) page 4.
 Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3) B) I) page 4.
 Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) A) I) page 4.
 Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) B) I) page 5.
 Reduced⁵- If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.
 Reduced⁶- If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ±0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.
 Reduced⁷ – When the antenna is more than 25 mm from a side, the test can be reduced per KDB447498 D01 v06 section 4.3.1 1) page 11. See below for calculations.

Maximum Power: 251.2 mW
 Closest Distance to right: 290.0 mm
 Closest Distance to Bottom: 140 mm

$$[[(3.0)/(\sqrt{0.798})]^2 * 50 \text{ mm}] + [(140 - 50 \text{ mm})^2 * 10] = 1067 \text{ mW}$$

which is greater than 251.2 mW

| Band/ Frequency (MHz) | Side | Required Test Channel | Bandwidth | Modulation | RB Allocation | RB Offset | Tested/ Reduced | |
|------------------------------|------------------------------|--------------------------|-----------|------------|------------------|----------------------|----------------------|----------------------|
| Band 12 699-716 MHz | Back | 23060 | 10 MHz | QPSK | 25 | 12 | Tested | |
| | | 23095 | | | | | Tested | |
| | | 23129 | | | | | Tested | |
| | | 23060 | | | 50 | 0 | Reduced ¹ | |
| | | 23095 | | | | | Tested | |
| | | 23129 | | | | | Reduced ¹ | |
| | | 23060 | | | 1 | 12 | Tested | |
| | | 23095 | | | | | Tested | |
| | | 23129 | | | | | Tested | |
| | | 23060 | | | 24 | 24 | Reduced ¹ | |
| | | 23095 | | | | | Reduced ² | |
| | | 23129 | | | | | Reduced ² | |
| | | 23060 | | 25 | 12 | Reduced ³ | | |
| | | 23095 | | | | Reduced ³ | | |
| | | 23129 | | | | Reduced ³ | | |
| | | 23060 | | 50 | 0 | Reduced ¹ | | |
| | | 23095 | | | | Reduced ¹ | | |
| | | 23129 | | | | Reduced ¹ | | |
| | | 23060 | | 1 | 0 | Reduced ⁴ | | |
| | | 23095 | | | | Reduced ⁴ | | |
| | | 23129 | | | | Reduced ⁴ | | |
| | | 23060 | | 24 | 24 | Reduced ⁴ | | |
| | | 23095 | | | | Reduced ⁴ | | |
| | | 23129 | | | | Reduced ⁴ | | |
| | All lower bandwidths (5 MHz) | | | | | | | Reduced ⁵ |
| | Top | QPSK | 23060 | 10 MHz | 25 | 12 | Reduced ⁶ | |
| | | | 23095 | | | | Tested | |
| | | | 23129 | | | | Reduced ⁶ | |
| | | | 23060 | | 50 | 0 | Reduced ¹ | |
| | | | 23095 | | | | Reduced ¹ | |
| | | | 23129 | | | | Reduced ¹ | |
| | | | 23060 | | 1 | 24 | Reduced ⁶ | |
| | | | 23095 | | | | Tested | |
| | | | 23129 | | | | Reduced ⁶ | |
| | | | 23060 | | 49 | 49 | Reduced ¹ | |
| | | | 23095 | | | | Reduced ² | |
| | | | 23129 | | | | Reduced ² | |
| | | 23060 | 25 | | 12 | Reduced ³ | | |
| | | 23095 | | | | Reduced ³ | | |
| | | 23129 | | | | Reduced ³ | | |
| | | 23060 | 50 | | 0 | Reduced ¹ | | |
| | | 23095 | | | | Reduced ¹ | | |
| | | 23129 | | | | Reduced ¹ | | |
| | | 23060 | 1 | | 0 | Reduced ⁴ | | |
| | | 23095 | | | | Reduced ⁴ | | |
| | | 23129 | | | | Reduced ⁴ | | |
| | | 23060 | 24 | | 24 | Reduced ⁴ | | |
| | | 23095 | | | | Reduced ⁴ | | |
| 23129 | | Reduced ⁴ | | | | | | |
| All lower bandwidths (5 MHz) | | | | | | | Reduced ⁵ | |
| All remaining sides | | | | | | | Reduced ⁷ | |

Reduced¹ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3) A) I) page 4.
 Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3) B) I) page 4.
 Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) A) I) page 4.
 Reduced⁴ - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) B) I) page 5.
 Reduced⁵ - If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.
 Reduced⁶ - If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ±0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.
 Reduced⁷ - When the antenna is more than 25 mm from a side, the test can be reduced per KDB447498 D01 v06 section 4.3.1 1) page 11. See below for calculations.

Maximum Power: 251.2 mW
 Closest Distance to right: 290.0 mm
 Closest Distance to Bottom: 140 mm

$$[(((3.0)/(\sqrt{0.716})) * 50 \text{ mm})] + [(140 - 50 \text{ mm}) * 10] = 1077 \text{ mW which is greater than 251.2 mW}$$

| Band/ Frequency (MHz) | Side | Required Test Channel | Bandwidth | Modulation | RB Allocation | RB Offset | Tested/ Reduced | | | |
|------------------------------|------------------------------|--------------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|--|
| Band 12 699-716 MHz | Left | 23060 | 10 MHz | QPSK | 25 | 12 | Reduced ⁶ | | | |
| | | 23095 | | | | | Tested | | | |
| | | 23129 | | | | | Reduced ⁶ | | | |
| | | 23060 | | | | | 50 | 0 | Reduced ¹ | |
| | | 23095 | | | | | | | Reduced ¹ | |
| | | 23129 | | | Reduced ¹ | | | | | |
| | | 23060 | | | 1 | 12 | | | Reduced ⁶ | |
| | | 23095 | | | | | | | Tested | |
| | | 23129 | | | | | Reduced ⁶ | | | |
| | | 23060 | | | | | 24 | 24 | Reduced ¹ | |
| | | 23095 | | Reduced ² | | | | | | |
| | | 23129 | | Reduced ² | | | | | | |
| | | 23060 | | 16QAM | 25 | 12 | | | Reduced ³ | |
| | | 23095 | | | | | | | Reduced ³ | |
| | | 23129 | | | | | Reduced ³ | | | |
| | | 23060 | | | | | 50 | 0 | Reduced ¹ | |
| | | 23095 | | | | | | | Reduced ¹ | |
| | | 23129 | | Reduced ¹ | | | | | | |
| | | 23060 | | 1 | 0 | Reduced ⁴ | | | | |
| | | 23095 | | | | Reduced ⁴ | | | | |
| | 23129 | Reduced ⁴ | | | | | | | | |
| | 23060 | 24 | 24 | | | Reduced ⁴ | | | | |
| | 23095 | | | | | Reduced ⁴ | | | | |
| | 23129 | | | Reduced ⁴ | | | | | | |
| | All lower bandwidths (5 MHz) | | | | | | | Reduced ⁵ | | |
| | All remaining sides | | | | | | | Reduced ⁶ | | |
| | Laptop | QPSK | 23060 | 10 MHz | 25 | 12 | Tested | | | |
| | | | 23095 | | | | Reduced ⁵ | | | |
| | | | 23129 | | | | Reduced ⁵ | | | |
| | | | 23060 | | | | 50 | 0 | Reduced ¹ | |
| | | | 23095 | | | | | | Reduced ¹ | |
| | | | 23129 | | Reduced ¹ | | | | | |
| | | | 23060 | | 1 | 24 | | | Reduced ⁶ | |
| | | | 23095 | | | | | | Tested | |
| | | | 23129 | | | | Reduced ⁶ | | | |
| | | | 23060 | | | | 49 | 49 | Reduced ¹ | |
| | | 23095 | Reduced ² | | | | | | | |
| | | 23129 | Reduced ² | | | | | | | |
| | | 23060 | 16QAM | | 25 | 12 | | | Reduced ³ | |
| | | 23095 | | | | | | | Reduced ³ | |
| | | 23129 | | | | | Reduced ³ | | | |
| | | 23060 | | | | | 50 | 0 | Reduced ¹ | |
| | | 23095 | | | | | | | Reduced ¹ | |
| | | 23129 | Reduced ¹ | | | | | | | |
| | | 23060 | 1 | | 0 | Reduced ⁴ | | | | |
| | | 23095 | | | | Reduced ⁴ | | | | |
| | 23129 | Reduced ⁴ | | | | | | | | |
| | 23060 | 24 | | 24 | | Reduced ⁴ | | | | |
| | 23095 | | | | | Reduced ⁴ | | | | |
| | 23129 | | Reduced ⁴ | | | | | | | |
| All lower bandwidths (5 MHz) | | | | | | | Reduced ⁵ | | | |
| All remaining sides | | | | | | | Reduced ⁷ | | | |

Reduced¹ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3) A) I) page 4.
 Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3) B) I) page 4.
 Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) A) I) page 4.
 Reduced⁴ - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) B) I) page 5.
 Reduced⁵ - If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.
 Reduced⁶ - If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ±0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.
 Reduced⁷ - When the antenna is more than 25 mm from a side, the test can be reduced per KDB447498 D01 v06 section 4.3.1 1) page 11. See below for calculations.

Maximum Power: 251.2 mW
 Closest Distance to right: 290.0 mm
 Closest Distance to Bottom: 140 mm

$$[[[(3.0)/(\sqrt{0.716})]*50 \text{ mm}]]+[[140-50 \text{ mm}]*10]=1077 \text{ mW which is greater than } 251.2 \text{ mW}$$

| Band/ Frequency (MHz) | Side | Required Test Channel | Bandwidth | Modulation | RB Allocation | RB Offset | Tested/ Reduced | |
|------------------------------|------------------------------|--------------------------|-----------|----------------------|----------------------|----------------------|----------------------|----------------------|
| Band 30 2305-2315 MHz | Back | 27710 | 10 MHz | QPSK | 25 | 12 | Tested | |
| | | 27710 | | | 50 | 0 | Reduced ¹ | |
| | | 27710 | | | 1 | 0 | Tested | |
| | | 27710 | | | 24 | Reduced ² | | |
| | | 27710 | | 16QAM | 25 | 12 | Reduced ³ | |
| | | 27710 | | | 50 | 0 | Reduced ¹ | |
| | | 27710 | | | 1 | 0 | Reduced ⁴ | |
| | | 27710 | | | 24 | Reduced ⁴ | | |
| | All lower bandwidths (5 MHz) | | | | | | | Reduced ⁵ |
| | Top | 10 MHz | QPSK | 25 | 12 | Tested | | |
| | | | | 50 | 0 | Reduced ¹ | | |
| | | | | 1 | 0 | Tested | | |
| | | | | 24 | Reduced ² | | | |
| | | | 16QAM | 25 | 12 | Reduced ³ | | |
| | | | | 50 | 0 | Reduced ¹ | | |
| | | | | 1 | 0 | Reduced ⁴ | | |
| | | | | 24 | Reduced ⁴ | | | |
| | All lower bandwidths (5 MHz) | | | | | | | |
| | Left | 10 MHz | QPSK | 25 | 12 | Tested | | |
| | | | | 50 | 0 | Reduced ¹ | | |
| | | | | 1 | 0 | Tested | | |
| | | | | 24 | Reduced ² | | | |
| | | | 16QAM | 25 | 12 | Reduced ³ | | |
| | | | | 50 | 0 | Reduced ¹ | | |
| | | | | 1 | 0 | Reduced ⁴ | | |
| | | | | 24 | Reduced ⁴ | | | |
| | All lower bandwidths (5 MHz) | | | | | | | Reduced ⁵ |
| | Laptop | 10 MHz | QPSK | 25 | 12 | Tested | | |
| | | | | 50 | 0 | Tested | | |
| | | | | 1 | 0 | Tested | | |
| | | | | 24 | Reduced ² | | | |
| | | | 16QAM | 25 | 12 | Reduced ³ | | |
| | | | | 50 | 0 | Reduced ¹ | | |
| 1 | | | | 0 | Reduced ⁴ | | | |
| 24 | | | | Reduced ⁴ | | | | |
| All lower bandwidths (5 MHz) | | | | | | | Reduced ⁵ | |
| All remaining sides | | | | | | | Reduced ⁷ | |

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3) A) I) page 4.
 Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3) B) I) page 4.
 Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) A) I) page 4.
 Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) B) I) page 5.
 Reduced⁵- If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.
 Reduced⁶- If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ±0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.
 Reduced⁷ – When the antenna is more than 25 mm from a side, the test can be reduced per KDB447498 D01 v06 section 4.3.1 1) page 11. See below for calculations.

Maximum Power: 251.2 mW
 Closest Distance to right: 290.0 mm
 Closest Distance to Bottom: 140 mm

$$[[(3.0)/(\sqrt{2.315})] * 50 \text{ mm}] + [(140 - 50 \text{ mm}) * 10] = 998 \text{ mW which is greater than } 251.2 \text{ mW}$$

| Band/ Frequency (MHz) | Side | Required Test Channel | Bandwidth | Modulation | RB Allocation | RB Offset | Tested/ Reduced | | |
|--|--|--------------------------|-----------|------------|------------------|----------------------|----------------------|----------------------|----------------------|
| Band 7 2500-2570 MHz | Back | 20850 | 20 MHz | QPSK | 50 | 0 | Tested | | |
| | | 21100 | | | | | Tested | | |
| | | 21350 | | | | | Tested | | |
| | | 20850 | | | 100 | 0 | Reduced ¹ | | |
| | | 21100 | | | | | Reduced ¹ | | |
| | | 21350 | | | | | Reduced ¹ | | |
| | | 20850 | | | 1 | 49 | Tested | | |
| | | 21100 | | | | | Tested | | |
| | | 21350 | | | | | Tested | | |
| | | 20850 | | | 99 | 99 | Reduced ² | | |
| | | 21100 | | | | | Reduced ² | | |
| | | 21350 | | | | | Reduced ² | | |
| | | 20850 | | 50 | 25 | Reduced ³ | | | |
| | | 21100 | | | | Reduced ³ | | | |
| | | 21350 | | | | Reduced ³ | | | |
| | | 20850 | | 100 | 0 | Reduced ¹ | | | |
| | | 21100 | | | | Reduced ¹ | | | |
| | | 21350 | | | | Reduced ¹ | | | |
| | | 20850 | | 1 | 49 | Reduced ⁴ | | | |
| | | 21100 | | | | Reduced ⁴ | | | |
| | | 21350 | | | | Reduced ⁴ | | | |
| | | 20850 | | 99 | 99 | Reduced ⁴ | | | |
| | | 21100 | | | | Reduced ⁴ | | | |
| | | 21350 | | | | Reduced ⁴ | | | |
| | All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz) | | | | | | | Reduced ⁵ | |
| | Top | QPSK | 20850 | 20 MHz | 50 | 25 | Reduced ⁷ | | |
| | | | 21100 | | | | Tested | | |
| | | | 21350 | | | | Reduced ⁷ | | |
| | | | 20850 | | | | 100 | 0 | Reduced ¹ |
| | | | 21100 | | | | | | Reduced ¹ |
| | | | 21350 | | | | | | Reduced ¹ |
| | | | 20850 | | 1 | 49 | Reduced ⁷ | | |
| | | | 21100 | | | | Tested | | |
| | | | 21350 | | | | Reduced ⁷ | | |
| | | | 20850 | | 99 | 99 | Reduced ² | | |
| | | | 21100 | | | | Reduced ² | | |
| | | | 21350 | | | | Reduced ² | | |
| | | 20850 | 50 | | 25 | Reduced ³ | | | |
| | | 21100 | | | | Reduced ³ | | | |
| | | 21350 | | | | Reduced ³ | | | |
| | | 20850 | 100 | | 0 | Reduced ¹ | | | |
| | | 21100 | | | | Reduced ¹ | | | |
| | | 21350 | | | | Reduced ¹ | | | |
| | | 20850 | 1 | | 49 | Reduced ⁴ | | | |
| | | 21100 | | | | Reduced ⁴ | | | |
| | | 21350 | | | | Reduced ⁴ | | | |
| | | 20850 | 99 | | 99 | Reduced ⁴ | | | |
| | | 21100 | | | | Reduced ⁴ | | | |
| 21350 | | Reduced ⁴ | | | | | | | |
| All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz) | | | | | | | Reduced ⁵ | | |
| All remaining sides | | | | | | | Reduced ⁶ | | |

Reduced¹ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3) A) I) page 4.
 Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3) B) I) page 4.
 Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) A) I) page 4.
 Reduced⁴ - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) B) I) page 5.
 Reduced⁵ - If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.
 Reduced⁶ - When the antenna is more than 25 mm from a side, the test can be reduced per KDB447498 D01 v06 section 4.3.1 1) page 11. See below for calculations.
 Reduced⁷ - If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ±0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Maximum Power: 251.2 mW
 Closest Distance to right: 290.0 mm
 Closest Distance to Bottom: 140 mm

$$[[[(3.0)/(\sqrt{2.57})]^*50 \text{ mm}]]+[(140-50 \text{ mm})^*10]=993 \text{ mW which is greater than 251.2 mW}$$

| Band/ Frequency (MHz) | Side | Required Test Channel | Bandwidth | Modulation | RB Allocation | RB Offset | Tested/ Reduced | |
|--|--|--------------------------|----------------------|----------------------|----------------------|--------------|----------------------|----------------------|
| Band 7 2500-2570 MHz | Left | 20850 | 20 MHz | QPSK | 50 | 0 | Reduced ⁷ | |
| | | 21100 | | | | | Tested | |
| | | 21350 | | | | | Reduced ⁷ | |
| | | 20850 | | | | | Reduced ¹ | |
| | | 21100 | | | Reduced ¹ | | | |
| | | 21350 | | | Reduced ¹ | | | |
| | | 20850 | | | Reduced ⁷ | | | |
| | | 21100 | | | Tested | | | |
| | | 21350 | | | Reduced ⁷ | | | |
| | | 20850 | | | Reduced ² | | | |
| | | 21100 | | | Reduced ² | | | |
| | | 21350 | | | Reduced ² | | | |
| | | 20850 | | Reduced ³ | | | | |
| | | 21100 | | Reduced ³ | | | | |
| | | 21350 | | Reduced ³ | | | | |
| | | 20850 | | Reduced ¹ | | | | |
| | | 21100 | | Reduced ¹ | | | | |
| | | 21350 | | Reduced ¹ | | | | |
| | | 20850 | | Reduced ⁴ | | | | |
| | | 21100 | | Reduced ⁴ | | | | |
| | | 21350 | | Reduced ⁴ | | | | |
| | | 20850 | | Reduced ⁴ | | | | |
| | | 21100 | | Reduced ⁴ | | | | |
| | | 21350 | | Reduced ⁴ | | | | |
| | All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz) | | | | | | | Reduced ⁵ |
| | Laptop | QPSK | 20850 | 20 MHz | 50 | 25 | Tested | |
| | | | 21100 | | | | Tested | |
| | | | 21350 | | | | Tested | |
| | | | 20850 | | | | Reduced ¹ | |
| | | | 21100 | | Tested | | | |
| | | | 21350 | | Reduced ¹ | | | |
| | | | 20850 | | Tested | | | |
| | | | 21100 | | Tested | | | |
| | | | 21350 | | Tested | | | |
| | | | 20850 | | Reduced ² | | | |
| | | | 21100 | | Reduced ² | | | |
| | | | 21350 | | Reduced ² | | | |
| | | 20850 | Reduced ³ | | | | | |
| | | 21100 | Reduced ³ | | | | | |
| | | 21350 | Reduced ³ | | | | | |
| | | 20850 | Reduced ¹ | | | | | |
| | | 21100 | Reduced ¹ | | | | | |
| | | 21350 | Reduced ¹ | | | | | |
| | | 20850 | Reduced ⁴ | | | | | |
| | | 21100 | Reduced ⁴ | | | | | |
| | | 21350 | Reduced ⁴ | | | | | |
| | | 20850 | Reduced ⁴ | | | | | |
| | | 21100 | Reduced ⁴ | | | | | |
| 21350 | | Reduced ⁴ | | | | | | |
| All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz) | | | | | | | Reduced ⁵ | |
| All remaining sides | | | | | | | Reduced ⁶ | |

Reduced¹ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3) A) I) page 4.
 Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3) B) I) page 4.
 Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) A) I) page 4.
 Reduced⁴ - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) B) I) page 5.
 Reduced⁵ - If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.
 Reduced⁶ - When the antenna is more than 25 mm from a side, the test can be reduced per KDB447498 D01 v06 section 4.3.1 1) page 11. See below for calculations.
 Reduced⁷ - If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ±0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Maximum Power: 251.2 mW
 Closest Distance to right: 290.0 mm
 Closest Distance to Bottom: 140 mm

$$[[[(3.0)/(\sqrt{2.57})]*50 \text{ mm}]]+[(140-50 \text{ mm})*10]=993 \text{ mW which is greater than } 251.2 \text{ mW}$$

| Band/ Frequency (MHz) | Side | Required Test Channel | Bandwidth | Modulation | RB Allocation | RB Offset | Tested/ Reduced | | | |
|--------------------------|------|--|-----------|----------------------|----------------------|--------------|----------------------|--|----------------------|--|
| Band 41 2496-2690 MHz | Back | 39750 | 20 MHz | QPSK | 50 | 0 | Reduced ⁷ | | | |
| | | 40135 | | | | | Reduced ⁷ | | | |
| | | 40620 | | | | | Tested | | | |
| | | 41105 | | | | | Reduced ⁷ | | | |
| | | 41490 | | | | | Reduced ⁷ | | | |
| | | 39750 | | | | | Reduced ¹ | | | |
| | | 40135 | | | Reduced ¹ | | | | | |
| | | 40620 | | | Tested | | | | | |
| | | 41105 | | | Reduced ¹ | | | | | |
| | | 41490 | | | Reduced ¹ | | | | | |
| | | 39750 | | | Tested | | | | | |
| | | 40135 | | | Tested | | | | | |
| | | 40620 | | | Tested | | | | | |
| | | 41105 | | | Tested | | | | | |
| | | 41490 | | | Tested | | | | | |
| | | 39750 | | | Reduced ² | | | | | |
| | | 40135 | | | Reduced ² | | | | | |
| | | 40620 | | | Reduced ² | | | | | |
| | | 41105 | | | Reduced ² | | | | | |
| | | 41490 | | | Reduced ² | | | | | |
| | | 39750 | | | Reduced ³ | | | | | |
| | | 40135 | | | Reduced ³ | | | | | |
| | | 40620 | | | Reduced ³ | | | | | |
| | | 41105 | | | Reduced ³ | | | | | |
| | | 41490 | | Reduced ³ | | | | | | |
| | | 39750 | | Reduced ¹ | | | | | | |
| | | 40135 | | Reduced ¹ | | | | | | |
| | | 40620 | | Reduced ¹ | | | | | | |
| | | 41105 | | Reduced ¹ | | | | | | |
| | | 41490 | | Reduced ¹ | | | | | | |
| | | 39750 | | Reduced ⁴ | | | | | | |
| | | 40135 | | Reduced ⁴ | | | | | | |
| | | 40620 | | Reduced ⁴ | | | | | | |
| | | 41105 | | Reduced ⁴ | | | | | | |
| | | 41490 | | Reduced ⁴ | | | | | | |
| | | 39750 | | Reduced ⁴ | | | | | | |
| | | 40135 | | Reduced ⁴ | | | | | | |
| | | 40620 | | Reduced ⁴ | | | | | | |
| | | 41105 | | Reduced ⁴ | | | | | | |
| | | 41490 | | Reduced ⁴ | | | | | | |
| | | All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz) | | | | | | | Reduced ⁵ | |
| | | All remaining sides | | | | | | | Reduced ⁶ | |

Reduced¹ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3) A) I) page 4.
 Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3) B) I) page 4.
 Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) A) I) page 4.
 Reduced⁴ - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) B) I) page 5.
 Reduced⁵ - If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.
 Reduced⁶ - When the antenna is more than 25 mm from a side, the test can be reduced per KDB447498 D01 v06 section 4.3.1 1) page 11. See below for calculations.
 Reduced⁷ - If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ±0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Maximum Power: 251.2 mW
 Closest Distance to right: 290.0 mm
 Closest Distance to Bottom: 140 mm

$$[(((3.0)/(\sqrt{2.69})) * 50 \text{ mm}) + ((140 - 50 \text{ mm}) * 10)] = 991 \text{ mW}$$
 which is greater than 251.2 mW

| Band/ Frequency (MHz) | Side | Required Test Channel | Bandwidth | Modulation | RB Allocation | RB Offset | Tested/ Reduced |
|--|----------------------|--------------------------|-----------|----------------------|----------------------|----------------------|----------------------|
| Band 41 2496-2690 MHz | Top | 39750 | 20 MHz | QPSK | 50 | 0 | Reduced ⁷ |
| | | 40135 | | | | | Reduced ⁷ |
| | | 40620 | | | | | Tested |
| | | 41105 | | | | | Reduced ⁷ |
| | | 41490 | | | | | Reduced ⁷ |
| | | 39750 | | | | | Reduced ¹ |
| | | 40135 | | | Reduced ¹ | | |
| | | 40620 | | | Reduced ¹ | | |
| | | 41105 | | | Reduced ¹ | | |
| | | 41490 | | | Reduced ¹ | | |
| | | 39750 | | | Reduced ⁷ | | |
| | | 40135 | | | Reduced ⁷ | | |
| | | 40620 | | | 49 | Tested | |
| | | 41105 | | | | Reduced ⁷ | |
| | | 41490 | | | | Reduced ⁷ | |
| | | 39750 | | | 1 | Reduced ² | |
| | | 40135 | | | | Reduced ² | |
| | | 40620 | | | | Reduced ² | |
| | | 41105 | | | 99 | Reduced ² | |
| | | 41490 | | | | Reduced ² | |
| | | 39750 | | | | Reduced ² | |
| | | 40135 | | | 50 | 25 | Reduced ³ |
| | | 40620 | | | | | Reduced ³ |
| | | 41105 | | | | | Reduced ³ |
| | | 41490 | | Reduced ³ | | | |
| | | 39750 | | Reduced ¹ | | | |
| | | 40135 | | 100 | 0 | Reduced ¹ | |
| | | 40620 | | | | Reduced ¹ | |
| | | 41105 | | | | Reduced ¹ | |
| | | 41490 | | 1 | 49 | Reduced ⁴ | |
| | | 39750 | | | | Reduced ⁴ | |
| | | 40135 | | | | Reduced ⁴ | |
| | | 40620 | | | 99 | Reduced ⁴ | |
| | | 41105 | | | | Reduced ⁴ | |
| | | 41490 | | | | Reduced ⁴ | |
| | | 39750 | | 99 | 99 | Reduced ⁴ | |
| | | 40135 | | | | Reduced ⁴ | |
| | | 40620 | | | | Reduced ⁴ | |
| | | 41105 | | 99 | 99 | Reduced ⁴ | |
| | | 41490 | | | | Reduced ⁴ | |
| | | 39750 | | | | Reduced ⁴ | |
| | | 40135 | | 99 | 99 | Reduced ⁴ | |
| | | 40620 | | | | Reduced ⁴ | |
| | | 41105 | | | | Reduced ⁴ | |
| | | 41490 | | 99 | 99 | Reduced ⁴ | |
| | | 39750 | | | | Reduced ⁴ | |
| | | 40135 | | | | Reduced ⁴ | |
| | | 40620 | | 99 | 99 | Reduced ⁴ | |
| 41105 | Reduced ⁴ | | | | | | |
| 41490 | Reduced ⁴ | | | | | | |
| All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz) | | | | | | | Reduced ⁵ |
| All remaining sides | | | | | | | Reduced ⁶ |

Reduced¹ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3) A) I) page 4.
 Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3) B) I) page 4.
 Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) A) I) page 4.
 Reduced⁴ - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) B) I) page 5.
 Reduced⁵ - If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.
 Reduced⁶ - When the antenna is more than 25 mm from a side, the test can be reduced per KDB447498 D01 v06 section 4.3.1 1) page 11. See below for calculations.
 Reduced⁷ - If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ±0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Maximum Power: 251.2 mW
 Closest Distance to right: 290.0 mm
 Closest Distance to Bottom: 140 mm

$$[(((3.0)/(\sqrt{2.69})) * 50 \text{ mm}) + ((140 - 50 \text{ mm}) * 10)] = 991 \text{ mW which is greater than } 251.2 \text{ mW}$$

| Band/ Frequency (MHz) | Side | Required Test Channel | Bandwidth | Modulation | RB Allocation | RB Offset | Tested/ Reduced | | | |
|--------------------------|------|--|-----------|----------------------|----------------------|--------------|----------------------|--|----------------------|--|
| Band 41 2496-2690 MHz | Left | 39750 | 20 MHz | QPSK | 50 | 0 | Reduced ⁷ | | | |
| | | 40135 | | | | | Reduced ⁷ | | | |
| | | 40620 | | | | | Tested | | | |
| | | 41105 | | | | | Reduced ⁷ | | | |
| | | 41490 | | | | | Reduced ⁷ | | | |
| | | 39750 | | | | | Reduced ¹ | | | |
| | | 40135 | | | | | Reduced ¹ | | | |
| | | 40620 | | | | | Reduced ¹ | | | |
| | | 41105 | | | Reduced ¹ | | | | | |
| | | 41490 | | | Reduced ¹ | | | | | |
| | | 39750 | | | Reduced ⁷ | | | | | |
| | | 40135 | | | Reduced ⁷ | | | | | |
| | | 40620 | | | Tested | | | | | |
| | | 41105 | | | Reduced ⁷ | | | | | |
| | | 41490 | | | Reduced ⁷ | | | | | |
| | | 39750 | | | Reduced ² | | | | | |
| | | 40135 | | | Reduced ² | | | | | |
| | | 40620 | | | Reduced ² | | | | | |
| | | 41105 | | | Reduced ² | | | | | |
| | | 41490 | | | Reduced ² | | | | | |
| | | 39750 | | | Reduced ³ | | | | | |
| | | 40135 | | | Reduced ³ | | | | | |
| | | 40620 | | | Reduced ³ | | | | | |
| | | 41105 | | | Reduced ³ | | | | | |
| | | 41490 | | Reduced ³ | | | | | | |
| | | 39750 | | Reduced ¹ | | | | | | |
| | | 40135 | | Reduced ¹ | | | | | | |
| | | 40620 | | Reduced ¹ | | | | | | |
| | | 41105 | | Reduced ¹ | | | | | | |
| | | 41490 | | Reduced ¹ | | | | | | |
| | | 39750 | | Reduced ⁴ | | | | | | |
| | | 40135 | | Reduced ⁴ | | | | | | |
| | | 40620 | | Reduced ⁴ | | | | | | |
| | | 41105 | | Reduced ⁴ | | | | | | |
| | | 41490 | | Reduced ⁴ | | | | | | |
| | | 39750 | | Reduced ⁴ | | | | | | |
| | | 40135 | | Reduced ⁴ | | | | | | |
| | | 40620 | | Reduced ⁴ | | | | | | |
| | | 41105 | | Reduced ⁴ | | | | | | |
| | | 41490 | | Reduced ⁴ | | | | | | |
| | | All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz) | | | | | | | Reduced ⁵ | |
| | | All remaining sides | | | | | | | Reduced ⁶ | |

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3) A) I) page 4.
 Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3) B) I) page 4.
 Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) A) I) page 4.
 Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) B) I) page 5.
 Reduced⁵- If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.
 Reduced⁶ – When the antenna is more than 25 mm from a side, the test can be reduced per KDB447498 D01 v06 section 4.3.1 1) page 11. See below for calculations.
 Reduced⁷ – If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ±0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Maximum Power: 251.2 mW
 Closest Distance to right: 290.0 mm
 Closest Distance to Bottom: 140 mm

$$[[[(3.0)/(\sqrt{2.69})]*50 \text{ mm}]]+[(140-50 \text{ mm})*10]=991 \text{ mW which is greater than } 251.2 \text{ mW}$$

| Band/ Frequency (MHz) | Side | Required Test Channel | Bandwidth | Modulation | RB Allocation | RB Offset | Tested/ Reduced | | | |
|--------------------------|--------|--|-----------|----------------------|----------------------|--------------|----------------------|--|----------------------|--|
| Band 41 2496-2690 MHz | Laptop | 39750 | 20 MHz | QPSK | 50 | 0 | Reduced ⁷ | | | |
| | | 40135 | | | | | Reduced ⁷ | | | |
| | | 40620 | | | | | Tested | | | |
| | | 41105 | | | | | Reduced ⁷ | | | |
| | | 41490 | | | | | Reduced ⁷ | | | |
| | | 39750 | | | | | Reduced ¹ | | | |
| | | 40135 | | | Reduced ¹ | | | | | |
| | | 40620 | | | Reduced ¹ | | | | | |
| | | 41105 | | | Reduced ¹ | | | | | |
| | | 41490 | | | Reduced ¹ | | | | | |
| | | 39750 | | | Reduced ⁷ | | | | | |
| | | 40135 | | | Reduced ⁷ | | | | | |
| | | 40620 | | | Tested | | | | | |
| | | 41105 | | | Reduced ⁷ | | | | | |
| | | 41490 | | | Reduced ⁷ | | | | | |
| | | 39750 | | | Reduced ² | | | | | |
| | | 40135 | | | Reduced ² | | | | | |
| | | 40620 | | | Reduced ² | | | | | |
| | | 41105 | | | Reduced ² | | | | | |
| | | 41490 | | | Reduced ² | | | | | |
| | | 39750 | | | Reduced ³ | | | | | |
| | | 40135 | | | Reduced ³ | | | | | |
| | | 40620 | | | Reduced ³ | | | | | |
| | | 41105 | | | Reduced ³ | | | | | |
| | | 41490 | | Reduced ³ | | | | | | |
| | | 39750 | | Reduced ¹ | | | | | | |
| | | 40135 | | Reduced ¹ | | | | | | |
| | | 40620 | | Reduced ¹ | | | | | | |
| | | 41105 | | Reduced ¹ | | | | | | |
| | | 41490 | | Reduced ¹ | | | | | | |
| | | 39750 | | Reduced ⁴ | | | | | | |
| | | 40135 | | Reduced ⁴ | | | | | | |
| | | 40620 | | Reduced ⁴ | | | | | | |
| | | 41105 | | Reduced ⁴ | | | | | | |
| | | 41490 | | Reduced ⁴ | | | | | | |
| | | 39750 | | Reduced ⁴ | | | | | | |
| | | 40135 | | Reduced ⁴ | | | | | | |
| | | 40620 | | Reduced ⁴ | | | | | | |
| | | 41105 | | Reduced ⁴ | | | | | | |
| | | 41490 | | Reduced ⁴ | | | | | | |
| | | All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz) | | | | | | | Reduced ⁵ | |
| | | All remaining sides | | | | | | | Reduced ⁶ | |

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3) A) I) page 4.
 Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3) B) I) page 4.
 Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) A) I) page 4.
 Reduced⁴ - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) B) I) page 5.
 Reduced⁵ - If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.
 Reduced⁶ – When the antenna is more than 25 mm from a side, the test can be reduced per KDB447498 D01 v06 section 4.3.1 1) page 11. See below for calculations.
 Reduced⁷ – If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ±0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Maximum Power: 251.2 mW
 Closest Distance to right: 290.0 mm
 Closest Distance to Bottom: 140 mm

$$[[[(3.0)/(\sqrt{2.69})]*50 \text{ mm}]]+[(140-50 \text{ mm})*10]=991 \text{ mW which is greater than } 251.2 \text{ mW}$$

SAR Data Summary – 750 MHz Body – LTE Band 12

MEASUREMENT RESULTS

| Gap | Plot | Position | Frequency | | BW/ Modulation | RB Size | RB Offset | MPR Target | End Power (dBm) | Measured SAR (W/kg) | Reported SAR (W/kg) |
|---------|-------|----------|-----------|-------------|-------------------|------------|--------------|---------------|-----------------------|------------------------|------------------------|
| | | | MHz | Ch. | | | | | | | |
| 0 mm | ----- | Back | 704.0 | 23060 | 10 MHz/QPSK | 1 | 0 | 0 | 19.8 | 1.15 | 1.35 |
| | 1 | | 707.5 | 23095 | 10 MHz/QPSK | 1 | 0 | 0 | 19.7 | 1.17 | 1.41 |
| | ----- | | 711.0 | 23129 | 10 MHz/QPSK | 1 | 0 | 0 | 19.9 | 1.15 | 1.32 |
| | ----- | | 704.0 | 23060 | 10 MHz/QPSK | 25 | 12 | 0 | 19.1 | 0.973 | 1.07 |
| | ----- | | 707.5 | 23095 | 10 MHz/QPSK | 25 | 12 | 0 | 18.9 | 0.977 | 1.12 |
| | ----- | | 711.0 | 23129 | 10 MHz/QPSK | 25 | 12 | 0 | 18.6 | 0.962 | 1.18 |
| | ----- | 707.5 | 23095 | 10 MHz/QPSK | 50 | 0 | 0 | 18.8 | 0.825 | 0.97 | |
| | ----- | Top | 704.0 | 23060 | 10 MHz/QPSK | 1 | 0 | 0 | 19.8 | 0.822 | 0.97 |
| | ----- | | 707.5 | 23095 | 10 MHz/QPSK | 1 | 0 | 0 | 19.7 | 0.865 | 1.04 |
| | ----- | | 711.0 | 23129 | 10 MHz/QPSK | 1 | 0 | 0 | 19.9 | 0.847 | 0.97 |
| | ----- | Left | 707.5 | 23095 | 10 MHz/QPSK | 25 | 0 | 0 | 18.9 | 0.650 | 0.75 |
| | ----- | | 704.0 | 23060 | 10 MHz/QPSK | 1 | 0 | 0 | 19.8 | 0.711 | 0.84 |
| | ----- | | 707.5 | 23095 | 10 MHz/QPSK | 1 | 0 | 0 | 19.7 | 0.744 | 0.89 |
| | ----- | Laptop | 711.0 | 23129 | 10 MHz/QPSK | 1 | 0 | 0 | 19.9 | 0.723 | 0.83 |
| | ----- | | 707.5 | 23095 | 10 MHz/QPSK | 25 | 0 | 0 | 18.9 | 0.546 | 0.63 |
| | ----- | Repeated | 707.5 | 23095 | 10 MHz/QPSK | 1 | 0 | 0 | 22.5 | 0.623 | 0.70 |
| | ----- | | 707.5 | 23095 | 10 MHz/QPSK | 25 | 0 | 0 | 21.5 | 0.418 | 0.47 |

Body
1.6 W/kg (mW/g)
averaged over 1 gram

1. SAR Measurement
 Phantom Configuration Left Head Eli4 Right Head
 SAR Configuration Head Body
2. Test Signal Call Mode Test Code Base Station Simulator
3. Test Configuration With Belt Clip Without Belt Clip N/A
4. Tissue Depth is at least 15.0 cm



Jay M. Moulton
Vice President

Note: LTE Band 17 is fully within the frequency bands of Band 12. Therefore, Band 17 was not tested for this report.


SAR Data Summary – 750 MHz Body – LTE Band 13

MEASUREMENT RESULTS

| Gap | Plot | Position | Frequency | | BW/ Modulation | RB Size | RB Offset | MPR Target | End Power (dBm) | Measured SAR (W/kg) | Reported SAR (W/kg) |
|---------|-------|----------|-----------|-------|-------------------|------------|--------------|---------------|-----------------------|------------------------|------------------------|
| | | | MHz | Ch. | | | | | | | |
| 0 mm | 2 | Back | 782.0 | 23230 | 10 MHz/QPSK | 1 | 0 | 0 | 20.3 | 1.18 | 1.39 |
| | ----- | | 782.0 | 23230 | 10 MHz/QPSK | 25 | 12 | 0 | 19.6 | 0.963 | 1.06 |
| | ----- | | 782.0 | 23230 | 10 MHz/QPSK | 50 | 0 | 0 | 19.4 | 0.892 | 1.02 |
| | ----- | Top | 782.0 | 23230 | 10 MHz/QPSK | 1 | 0 | 0 | 20.3 | 0.696 | 0.82 |
| | ----- | | 782.0 | 23230 | 10 MHz/QPSK | 25 | 12 | 0 | 19.6 | 0.565 | 0.62 |
| | ----- | Left | 782.0 | 23230 | 10 MHz/QPSK | 1 | 0 | 0 | 20.3 | 0.948 | 1.11 |
| | ----- | | 782.0 | 23230 | 10 MHz/QPSK | 25 | 0 | 0 | 19.6 | 0.787 | 0.86 |
| | ----- | Laptop | 782.0 | 23230 | 10 MHz/QPSK | 1 | 0 | 0 | 23.0 | 0.498 | 0.63 |
| | ----- | | 782.0 | 23230 | 10 MHz/QPSK | 25 | 0 | 0 | 22.4 | 0.304 | 0.35 |
| | ----- | Repeated | 782.0 | 23230 | 10 MHz/QPSK | 1 | 0 | 0 | 20.3 | 1.16 | 1.36 |

Body
1.6 W/kg (mW/g)
averaged over 1 gram

1. SAR Measurement
 Phantom Configuration Left Head Eli4 Right Head
 SAR Configuration Head Body
2. Test Signal Call Mode Test Code Base Station Simulator
3. Test Configuration With Belt Clip Without Belt Clip N/A
4. Tissue Depth is at least 15.0 cm

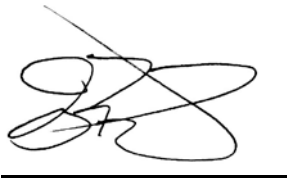

Jay M. Moulton
Vice President


SAR Data Summary – 750 MHz Body – LTE Band 14

MEASUREMENT RESULTS

| Gap | Plot | Position | Frequency | | BW/ Modulation | RB Size | RB Offset | MPR Target | End Power (dBm) | Measured SAR (W/kg) | Reported SAR (W/kg) |
|---------|-------|----------|-----------|-------|-------------------|------------|--------------|---------------|-----------------------|------------------------|------------------------|
| | | | MHz | Ch. | | | | | | | |
| 0 mm | 3 | Back | 793.0 | 23330 | 10 MHz/QPSK | 1 | 0 | 0 | 20.2 | 1.16 | 1.40 |
| | ----- | | 793.0 | 23330 | 10 MHz/QPSK | 25 | 12 | 0 | 19.6 | 0.946 | 1.04 |
| | ----- | | 793.0 | 23330 | 10 MHz/QPSK | 50 | 0 | 0 | 19.6 | 0.873 | 0.96 |
| | ----- | Top | 793.0 | 23330 | 10 MHz/QPSK | 1 | 0 | 0 | 20.2 | 0.661 | 0.80 |
| | ----- | | 793.0 | 23330 | 10 MHz/QPSK | 25 | 12 | 0 | 19.6 | 0.466 | 0.51 |
| | ----- | Left | 793.0 | 23330 | 10 MHz/QPSK | 1 | 0 | 0 | 20.2 | 0.913 | 1.10 |
| | ----- | | 793.0 | 23330 | 10 MHz/QPSK | 25 | 12 | 0 | 19.6 | 0.763 | 0.84 |
| | ----- | Laptop | 793.0 | 23330 | 10 MHz/QPSK | 1 | 0 | 0 | 23.0 | 0.468 | 0.59 |
| | ----- | | 793.0 | 23330 | 10 MHz/QPSK | 25 | 12 | 0 | 22.4 | 0.281 | 0.32 |
| | ----- | Repeated | 793.0 | 23330 | 10 MHz/QPSK | 1 | 0 | 0 | 20.2 | 1.14 | 1.37 |

Body
1.6 W/kg (mW/g)
averaged over 1 gram

1. SAR Measurement
Phantom Configuration Left Head Eli4 Right Head
SAR Configuration Head Body
2. Test Signal Call Mode Test Code Base Station Simulator
3. Test Configuration With Belt Clip Without Belt Clip N/A
4. Tissue Depth is at least 15.0 cm

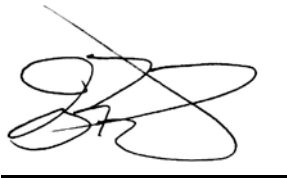

Jay M. Moulton
Vice President

SAR Data Summary – 835 MHz Body - WCDMA

MEASUREMENT RESULTS

| Gap | Plot | Frequency | | Modulation | Position | End Power (dBm) | RMC | Test Set Up | Measured SAR (W/kg) | Reported SAR (W/kg) |
|------|------|-----------|------|------------|----------|-----------------|-----------|-------------|---------------------|---------------------|
| | | MHz | Ch. | | | | | | | |
| 0 mm | 4 | 826.4 | 4132 | WCDMA | Back | 21.37 | 12.2 kbps | Test Loop 1 | 1.08 | 1.25 |
| | ---- | 836.6 | 4183 | WCDMA | | 21.39 | 12.2 kbps | Test Loop 1 | 1.06 | 1.22 |
| | ---- | 846.6 | 4233 | WCDMA | | 21.29 | 12.2 kbps | Test Loop 1 | 1.01 | 1.19 |
| | ---- | 836.6 | 4183 | WCDMA | Top | 21.39 | 12.2 kbps | Test Loop 1 | 0.524 | 0.60 |
| | ---- | 826.4 | 4132 | WCDMA | Left | 21.37 | 12.2 kbps | Test Loop 1 | 0.860 | 0.99 |
| | ---- | 836.6 | 4183 | WCDMA | | 21.39 | 12.2 kbps | Test Loop 1 | 0.903 | 1.04 |
| | ---- | 846.6 | 4233 | WCDMA | | 21.29 | 12.2 kbps | Test Loop 1 | 0.826 | 0.97 |
| | ---- | 826.4 | 4132 | WCDMA | Laptop | 23.97 | 12.2 kbps | Test Loop 1 | 0.986 | 1.11 |
| | ---- | 836.6 | 4183 | WCDMA | | 23.64 | 12.2 kbps | Test Loop 1 | 0.881 | 1.07 |
| | ---- | 846.6 | 4233 | WCDMA | | 23.72 | 12.2 kbps | Test Loop 1 | 0.878 | 1.05 |
| | ---- | 826.4 | 4132 | WCDMA | Repeat | 21.37 | 12.2 kbps | Test Loop 1 | 1.06 | 1.23 |

Body
1.6 W/kg (mW/g)
 averaged over 1 gram

1. SAR Measurement
 Phantom Configuration Left Head Eli4 Right Head
 SAR Configuration Head Body
2. Test Signal Call Mode Test Code Base Station Simulator
3. Test Configuration With Belt Clip Without Belt Clip N/A
4. Tissue Depth is at least 15.0 cm



Jay M. Moulton
 Vice President

SAR Data Summary – 835 MHz Body – LTE Bands 26

| MEASUREMENT RESULTS | | | | | | | | | | | |
|---------------------|------|----------|-----------|-------|----------------|---------|-----------|------------|-----------------|---------------------|---------------------|
| Gap | Plot | Position | Frequency | | BW/ Modulation | RB Size | RB Offset | MPR Target | End Power (dBm) | Measured SAR (W/kg) | Reported SAR (W/kg) |
| | | | MHz | Ch. | | | | | | | |
| 0 mm | ---- | Back | 831.5 | 26865 | 15 MHz/QPSK | 1 | 0 | 0 | 21.2 | 0.398 | 0.48 |
| | ---- | | 831.5 | 26865 | 15 MHz/QPSK | 25 | 0 | 0 | 20.3 | 0.396 | 0.47 |
| | 5 | Top | 821.5 | 26740 | 15 MHz/QPSK | 1 | 0 | 0 | 21.3 | 1.08 | 1.27 |
| | ---- | | 831.5 | 26865 | 15 MHz/QPSK | 1 | 0 | 0 | 21.2 | 1.03 | 1.24 |
| | ---- | | 841.5 | 26990 | 15 MHz/QPSK | 1 | 0 | 0 | 21.0 | 0.982 | 1.24 |
| | ---- | | 821.5 | 26740 | 15 MHz/QPSK | 25 | 0 | 0 | 20.1 | 0.891 | 1.10 |
| | ---- | | 831.5 | 26865 | 15 MHz/QPSK | 25 | 0 | 0 | 20.3 | 0.820 | 0.96 |
| | ---- | | 841.5 | 26990 | 15 MHz/QPSK | 25 | 0 | 0 | 20.4 | 0.706 | 0.81 |
| | ---- | | 821.5 | 26740 | 15 MHz/QPSK | 50 | 0 | 0 | 20.2 | 0.796 | 0.96 |
| | ---- | | 831.5 | 26865 | 15 MHz/QPSK | 1 | 0 | 0 | 21.2 | 0.523 | 0.63 |
| | ---- | Left | 831.5 | 26865 | 15 MHz/QPSK | 25 | 0 | 0 | 20.3 | 0.519 | 0.61 |
| | ---- | | 821.5 | 26740 | 15 MHz/QPSK | 1 | 0 | 0 | 23.2 | 0.933 | 1.12 |
| | ---- | Laptop | 831.5 | 26865 | 15 MHz/QPSK | 1 | 0 | 0 | 23.5 | 0.909 | 1.02 |
| | ---- | | 841.5 | 26990 | 15 MHz/QPSK | 1 | 0 | 0 | 23.5 | 0.861 | 0.97 |
| | ---- | | 821.5 | 26740 | 15 MHz/QPSK | 25 | 0 | 0 | 22.6 | 0.658 | 0.72 |
| | ---- | | 831.5 | 26865 | 15 MHz/QPSK | 25 | 0 | 0 | 22.1 | 0.692 | 0.85 |
| | ---- | ---- | 841.5 | 26990 | 15 MHz/QPSK | 25 | 0 | 0 | 22.7 | 0.639 | 0.69 |
| | ---- | Repeated | 821.5 | 26740 | 15 MHz/QPSK | 1 | 0 | 0 | 21.3 | 1.06 | 1.25 |

Body
1.6 W/kg (mW/g)
averaged over 1 gram

1. SAR Measurement
Phantom Configuration Left Head Eli4 Right Head
SAR Configuration Head Body
2. Test Signal Call Mode Test Code Base Station Simulator
3. Test Configuration With Belt Clip Without Belt Clip N/A
4. Tissue Depth is at least 15.0 cm



Jay M. Moulton
Vice President

Note: LTE Band 5 is fully within the frequency bands of Band 26. Therefore, Band 5 was not tested for this report.

SAR Data Summary – 1750 MHz Body - WCDMA

MEASUREMENT RESULTS

| Gap | Plot | Frequency | | Rev Level/ Modulation | Position | End Power (dBm) | RMC | Test Set Up | Measured SAR (W/kg) | Reported SAR (W/kg) |
|---------|------|-----------|------|--------------------------|----------|-----------------------|-----------|-------------|---------------------------|---------------------------|
| | | MHz | Ch. | | | | | | | |
| 0 mm | ---- | 1712.4 | 1312 | WCDMA | Back | 15.43 | 12.2 kbps | Test Loop 1 | 0.878 | 1.00 |
| | ---- | 1732.6 | 1413 | WCDMA | | 15.19 | 12.2 kbps | Test Loop 1 | 0.965 | 1.16 |
| | ---- | 1752.6 | 1513 | WCDMA | | 15.23 | 12.2 kbps | Test Loop 1 | 0.786 | 0.94 |
| | ---- | 1732.6 | 1413 | WCDMA | Top | 15.19 | 12.2 kbps | Test Loop 1 | 0.176 | 0.21 |
| | ---- | 1732.6 | 1413 | WCDMA | Left | 15.19 | 12.2 kbps | Test Loop 1 | 0.183 | 0.22 |
| | ---- | 1712.4 | 1312 | WCDMA | Laptop | 19.54 | 12.2 kbps | Test Loop 1 | 0.806 | 1.01 |
| | ---- | 1732.6 | 1413 | WCDMA | | 19.57 | 12.2 kbps | Test Loop 1 | 0.901 | 1.12 |
| | 6 | 1752.6 | 1513 | WCDMA | | 19.69 | 12.2 kbps | Test Loop 1 | 1.00 | 1.21 |
| | ---- | 1752.6 | 1513 | WCDMA | Repeat | 19.69 | 12.2 kbps | Test Loop 1 | 0.986 | 1.19 |

Body
1.6 W/kg (mW/g)
 averaged over 1 gram

1. SAR Measurement
 Phantom Configuration Left Head Eli4 Right Head
 SAR Configuration Head Body
2. Test Signal Call Mode Test Code Base Station Simulator
3. Test Configuration With Belt Clip Without Belt Clip N/A
4. Tissue Depth is at least 15.0 cm




Jay M. Moulton
 Vice President

SAR Data Summary – 1750 MHz Body – LTE Band 66

| MEASUREMENT RESULTS | | | | | | | | | | | |
|---------------------|--------|----------|-----------|-------------|-------------------|------------|--------------|---------------|-----------------------|------------------------|------------------------|
| Gap | Plot | Position | Frequency | | BW/ Modulation | RB Size | RB Offset | MPR Target | End Power (dBm) | Measured SAR (W/kg) | Reported SAR (W/kg) |
| | | | MHz | Ch. | | | | | | | |
| 0 mm | ----- | Back | 1720.0 | 132072 | 20 MHz/QPSK | 1 | 0 | 0 | 15.7 | 0.923 | 0.99 |
| | ----- | | 1745.0 | 132322 | 20 MHz/QPSK | 1 | 0 | 0 | 15.4 | 1.09 | 1.25 |
| | 7 | | 1770.0 | 132571 | 20 MHz/QPSK | 1 | 0 | 0 | 15.0 | 1.10 | 1.39 |
| | ----- | | 1720.0 | 132072 | 20 MHz/QPSK | 50 | 0 | 0 | 14.2 | 0.882 | 1.06 |
| | ----- | | 1745.0 | 132322 | 20 MHz/QPSK | 50 | 0 | 0 | 14.7 | 0.852 | 0.91 |
| | ----- | | 1770.0 | 132571 | 20 MHz/QPSK | 50 | 0 | 0 | 14.2 | 0.861 | 1.04 |
| | ----- | | 1745.0 | 132322 | 20 MHz/QPSK | 100 | 0 | 0 | 14.6 | 0.756 | 0.83 |
| | ----- | Top | 1745.0 | 132322 | 20 MHz/QPSK | 1 | 0 | 0 | 15.4 | 0.134 | 0.15 |
| | ----- | | 1745.0 | 132322 | 20 MHz/QPSK | 50 | 0 | 0 | 14.7 | 0.129 | 0.14 |
| | ----- | Left | 1720.0 | 132072 | 20 MHz/QPSK | 1 | 0 | 0 | 15.7 | 0.976 | 1.05 |
| | ----- | | 1745.0 | 132322 | 20 MHz/QPSK | 1 | 0 | 0 | 15.4 | 1.04 | 1.19 |
| | ----- | | 1770.0 | 132571 | 20 MHz/QPSK | 1 | 0 | 0 | 15.0 | 1.06 | 1.33 |
| | ----- | | 1720.0 | 132072 | 20 MHz/QPSK | 50 | 0 | 0 | 14.2 | 0.766 | 0.92 |
| | ----- | | 1745.0 | 132322 | 20 MHz/QPSK | 50 | 0 | 0 | 14.7 | 0.832 | 0.89 |
| | ----- | Laptop | 1770.0 | 132571 | 20 MHz/QPSK | 50 | 0 | 0 | 14.2 | 0.839 | 1.01 |
| | ----- | | 1720.0 | 132072 | 20 MHz/QPSK | 1 | 0 | 0 | 19.9 | 0.825 | 0.95 |
| | ----- | | 1745.0 | 132322 | 20 MHz/QPSK | 1 | 0 | 0 | 19.5 | 1.09 | 1.37 |
| | ----- | | 1770.0 | 132571 | 20 MHz/QPSK | 1 | 0 | 0 | 20.1 | 1.12 | 1.23 |
| | ----- | | 1720.0 | 132072 | 20 MHz/QPSK | 50 | 0 | 0 | 18.7 | 0.814 | 0.98 |
| | ----- | Repeated | 1745.0 | 132322 | 20 MHz/QPSK | 50 | 0 | 0 | 19.0 | 0.856 | 0.96 |
| ----- | 1770.0 | | 132571 | 20 MHz/QPSK | 50 | 0 | 0 | 18.5 | 0.924 | 1.16 | |
| ----- | ----- | 1745.0 | 132322 | 20 MHz/QPSK | 1 | 0 | 0 | 15.0 | 1.08 | 1.36 | |

Body
1.6 W/kg (mW/g)
averaged over 1 gram

- SAR Measurement
Phantom Configuration Left Head Eli4 Right Head
SAR Configuration Head Body
- Test Signal Call Mode Test Code Base Station Simulator
- Test Configuration With Belt Clip Without Belt Clip N/A
- Tissue Depth is at least 15.0 cm

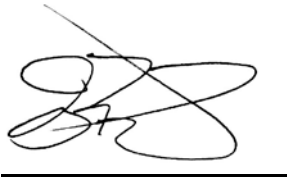

Jay M. Moulton
Vice President

Note: LTE Band 4 is fully within the frequency bands of Band 66. Therefore, Band 4 was not tested for this report.

SAR Data Summary – 1900 MHz Body - WCDMA

MEASUREMENT RESULTS

| Gap | Plot | Frequency | | Rev Level/ Modulation | Position | End Power (dBm) | RMC | Test Set Up | Measured SAR (W/kg) | Reported SAR (W/kg) |
|---------|--------|-----------|-------|--------------------------|----------|-----------------------|-------------|-------------|---------------------------|---------------------------|
| | | MHz | Ch. | | | | | | | |
| 0 mm | ---- | 1852.4 | 9262 | WCDMA | Back | 14.67 | 12.2 kbps | Test Loop 1 | 1.04 | 1.26 |
| | ---- | 1880.0 | 9400 | WCDMA | | 14.86 | 12.2 kbps | Test Loop 1 | 1.09 | 1.26 |
| | ---- | 1907.6 | 9538 | WCDMA | | 14.51 | 12.2 kbps | Test Loop 1 | 1.09 | 1.37 |
| | ---- | 1880.0 | 9400 | WCDMA | Top | 14.86 | 12.2 kbps | Test Loop 1 | 0.354 | 0.41 |
| | ---- | 1852.4 | 9262 | WCDMA | Left | 14.67 | 12.2 kbps | Test Loop 1 | 1.03 | 1.25 |
| | ---- | 1880.0 | 9400 | WCDMA | | 14.86 | 12.2 kbps | Test Loop 1 | 0.926 | 1.07 |
| | ---- | 1907.6 | 9538 | WCDMA | | 14.51 | 12.2 kbps | Test Loop 1 | 0.709 | 0.89 |
| | ---- | 1852.4 | 9262 | WCDMA | Laptop | 19.01 | 12.2 kbps | Test Loop 1 | 1.11 | 1.39 |
| | 8 | 1880.0 | 9400 | WCDMA | | 19.09 | 12.2 kbps | Test Loop 1 | 1.15 | 1.42 |
| | ---- | 1907.6 | 9538 | WCDMA | | 19.12 | 12.2 kbps | Test Loop 1 | 1.10 | 1.35 |
| ---- | 1880.0 | 9400 | WCDMA | Repeat | 19.09 | 12.2 kbps | Test Loop 1 | 1.13 | 1.39 | |

Body
1.6 W/kg (mW/g)
 averaged over 1 gram

1. SAR Measurement
 Phantom Configuration Left Head Eli4 Right Head
 SAR Configuration Head Body
2. Test Signal Call Mode Test Code Base Station Simulator
3. Test Configuration With Belt Clip Without Belt Clip N/A
4. Tissue Depth is at least 15.0 cm



Jay M. Moulton
 Vice President


SAR Data Summary – 1900 MHz Body – LTE Band 25

MEASUREMENT RESULTS

| Gap | Plot | Position | Frequency | | BW/ Modulation | RB Size | RB Offset | MPR Target | End Power (dBm) | Measured SAR (W/kg) | Reported SAR (W/kg) |
|------|-------|----------|-----------|-------------|----------------|---------|-----------|------------|-----------------|---------------------|---------------------|
| | | | MHz | Ch. | | | | | | | |
| 0 mm | ---- | Back | 1860.0 | 26140 | 20 MHz/QPSK | 1 | 0 | 0 | 15.0 | 1.07 | 1.20 |
| | ---- | | 1882.5 | 26365 | 20 MHz/QPSK | 1 | 0 | 0 | 14.8 | 1.06 | 1.25 |
| | ---- | | 1905.0 | 26590 | 20 MHz/QPSK | 1 | 0 | 0 | 15.1 | 1.16 | 1.27 |
| | ---- | | 1882.5 | 26365 | 20 MHz/QPSK | 50 | 0 | 0 | 13.5 | 0.581 | 0.73 |
| | ---- | Top | 1882.5 | 26365 | 20 MHz/QPSK | 1 | 0 | 0 | 14.8 | 0.439 | 0.52 |
| | ---- | | 1882.5 | 26365 | 20 MHz/QPSK | 50 | 0 | 0 | 13.5 | 0.339 | 0.43 |
| | ---- | Left | 1860.0 | 26140 | 20 MHz/QPSK | 1 | 0 | 0 | 15.0 | 0.981 | 1.10 |
| | ---- | | 1882.5 | 26365 | 20 MHz/QPSK | 1 | 0 | 0 | 14.8 | 0.874 | 1.03 |
| | ---- | | 1905.0 | 26590 | 20 MHz/QPSK | 1 | 0 | 0 | 15.1 | 0.734 | 0.80 |
| | ---- | | 1882.5 | 26365 | 20 MHz/QPSK | 50 | 0 | 0 | 13.5 | 0.577 | 0.73 |
| | ---- | Laptop | 1860.0 | 26140 | 20 MHz/QPSK | 1 | 0 | 0 | 19.5 | 1.14 | 1.28 |
| | 9 | | 1882.5 | 26365 | 20 MHz/QPSK | 1 | 0 | 0 | 19.5 | 1.23 | 1.38 |
| | ---- | | 1905.0 | 26590 | 20 MHz/QPSK | 1 | 0 | 0 | 19.3 | 1.15 | 1.35 |
| | ---- | | 1882.5 | 26365 | 20 MHz/QPSK | 50 | 0 | 0 | 18.1 | 0.664 | 0.82 |
| | ---- | Repeated | 1882.5 | 26365 | 20 MHz/QPSK | 100 | 0 | 0 | 18.5 | 0.572 | 0.64 |
| ---- | 26365 | | 1882.5 | 20 MHz/QPSK | 1 | 0 | 0 | 19.5 | 1.21 | 1.36 | |

Body
1.6 W/kg (mW/g)
averaged over 1 gram

1. SAR Measurement
Phantom Configuration Left Head Eli4 Right Head
SAR Configuration Head Body
2. Test Signal Call Mode Test Code Base Station Simulator
3. Test Configuration With Belt Clip Without Belt Clip N/A
4. Tissue Depth is at least 15.0 cm

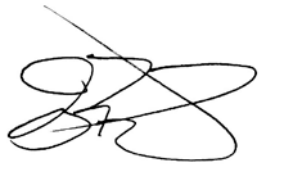

Jay M. Moulton
Vice President

Note: LTE Band 5 is fully within the frequency bands of Band 25. Therefore, Band 5 was not tested for this report.


SAR Data Summary – 2300 MHz Body – LTE Band 30

MEASUREMENT RESULTS

| Gap | Plot | Position | Frequency | | BW/ Modulation | RB Size | RB Offset | MPR Target | End Power (dBm) | Measured SAR (W/kg) | Reported SAR (W/kg) |
|---------|------|----------|-----------|-------|-------------------|------------|--------------|---------------|-----------------------|------------------------|------------------------|
| | | | MHz | Ch. | | | | | | | |
| 0 mm | ---- | Back | 2310 | 27710 | 10 MHz/QPSK | 1 | 0 | 0 | 13.5 | 0.901 | 1.01 |
| | ---- | | 2310 | 27710 | 10 MHz/QPSK | 25 | 12 | 0 | 12.7 | 0.718 | 0.77 |
| | ---- | Top | 2310 | 27710 | 10 MHz/QPSK | 1 | 0 | 0 | 13.5 | 0.258 | 0.29 |
| | ---- | | 2310 | 27710 | 10 MHz/QPSK | 25 | 12 | 0 | 12.7 | 0.170 | 0.18 |
| | ---- | Left | 2310 | 27710 | 10 MHz/QPSK | 1 | 0 | 0 | 13.5 | 0.450 | 0.51 |
| | ---- | | 2310 | 27710 | 10 MHz/QPSK | 25 | 12 | 0 | 12.7 | 0.253 | 0.27 |
| | 10 | Laptop | 2310 | 27710 | 10 MHz/QPSK | 1 | 0 | 0 | 17.5 | 1.09 | 1.37 |
| | ---- | | 2310 | 27710 | 10 MHz/QPSK | 25 | 12 | 0 | 16.6 | 0.972 | 1.20 |
| | ---- | | 2310 | 27710 | 10 MHz/QPSK | 50 | 0 | 0 | 16.7 | 0.876 | 1.05 |
| | ---- | Repeat | 2310 | 27710 | 10 MHz/QPSK | 1 | 0 | 0 | 17.5 | 1.07 | 1.35 |

Body
1.6 W/kg (mW/g)
averaged over 1 gram

1. SAR Measurement
 Phantom Configuration Left Head Eli4 Right Head
 SAR Configuration Head Body
2. Test Signal Call Mode Test Code Base Station Simulator
3. Test Configuration With Belt Clip Without Belt Clip N/A
4. Tissue Depth is at least 15.0 cm

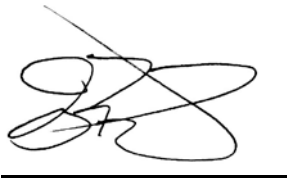

Jay M. Moulton
Vice President


SAR Data Summary – 2500 MHz Body – LTE Band 7

MEASUREMENT RESULTS

| Gap | Plot | Position | Frequency | | BW/ Modulation | RB Size | RB Offset | MPR Target | End Power (dBm) | Measured SAR (W/kg) | Reported SAR (W/kg) |
|------|--------|----------|-----------|-------------|----------------|---------|-----------|------------|-----------------|---------------------|---------------------|
| | | | MHz | Ch. | | | | | | | |
| 0 mm | ---- | Back | 2507.5 | 20850 | 20 MHz/QPSK | 1 | 0 | 0 | 13.6 | 1.02 | 1.26 |
| | ---- | | 2535.0 | 21100 | 20 MHz/QPSK | 1 | 0 | 0 | 14.2 | 1.03 | 1.10 |
| | ---- | | 2562.5 | 21350 | 20 MHz/QPSK | 1 | 0 | 0 | 13.8 | 1.06 | 1.25 |
| | ---- | | 2507.5 | 20850 | 20 MHz/QPSK | 50 | 0 | 0 | 12.9 | 0.856 | 0.98 |
| | ---- | | 2535.0 | 21100 | 20 MHz/QPSK | 50 | 0 | 0 | 12.9 | 0.902 | 1.04 |
| | ---- | 2562.5 | 21350 | 20 MHz/QPSK | 50 | 0 | 0 | 13.0 | 0.879 | 0.99 | |
| | ---- | Top | 2535.0 | 21100 | 20 MHz/QPSK | 1 | 0 | 0 | 14.2 | 0.265 | 0.28 |
| | ---- | | 2535.0 | 21100 | 20 MHz/QPSK | 50 | 0 | 0 | 12.9 | 0.133 | 0.15 |
| | ---- | Left | 2535.0 | 21100 | 20 MHz/QPSK | 1 | 0 | 0 | 14.2 | 0.629 | 0.67 |
| | ---- | | 2535.0 | 21100 | 20 MHz/QPSK | 50 | 0 | 0 | 12.9 | 0.535 | 0.60 |
| | 11 | Laptop | 2507.5 | 20850 | 20 MHz/QPSK | 1 | 0 | 0 | 16.3 | 1.18 | 1.39 |
| | ---- | | 2535.0 | 21100 | 20 MHz/QPSK | 1 | 0 | 0 | 16.1 | 1.10 | 1.35 |
| | ---- | | 2562.5 | 21350 | 20 MHz/QPSK | 1 | 0 | 0 | 16.1 | 1.13 | 1.39 |
| | ---- | | 2507.5 | 20850 | 20 MHz/QPSK | 50 | 0 | 0 | 15.1 | 0.981 | 1.21 |
| | ---- | | 2535.0 | 21100 | 20 MHz/QPSK | 50 | 0 | 0 | 15.3 | 0.942 | 1.11 |
| | ---- | | 2562.5 | 21350 | 20 MHz/QPSK | 50 | 0 | 0 | 15.0 | 0.947 | 1.19 |
| | ---- | 2535.0 | 21100 | 20 MHz/QPSK | 100 | 0 | 0 | 15.7 | 0.902 | 0.97 | |
| ---- | Repeat | 2507.5 | 20850 | 20 MHz/QPSK | 1 | 0 | 0 | 16.3 | 1.16 | 1.36 | |

Body
1.6 W/kg (mW/g)
averaged over 1 gram

1. SAR Measurement
 Phantom Configuration Left Head Eli4 Right Head
 SAR Configuration Head Body
 2. Test Signal Call Mode Test Code Base Station Simulator
 3. Test Configuration With Belt Clip Without Belt Clip N/A
 4. Tissue Depth is at least 15.0 cm



Jay M. Moulton
Vice President

SAR Data Summary –LTE Bands 41

MEASUREMENT RESULTS

| Gap | Plot | Position | Frequency | | BW/ Modulation | RB Size | RB Offset | MPR Target | End Power (dBm) | Measured SAR (W/kg) | Reported SAR (W/kg) |
|------|------|----------|-----------|-------|-------------------|------------|--------------|---------------|-----------------------|---------------------------|---------------------------|
| | | | MHz | Ch. | | | | | | | |
| 0 mm | ---- | Back | 2506 | 39750 | 20 MHz/QPSK | 1 | 0 | 0 | 15.5 | 0.736 | 0.93 |
| | ---- | | 2549.5 | 40185 | 20 MHz/QPSK | 1 | 0 | 0 | 15.7 | 0.726 | 0.87 |
| | 12 | | 2593 | 40620 | 20 MHz/QPSK | 1 | 0 | 0 | 16.1 | 0.847 | 0.93 |
| | ---- | | 2636.5 | 41055 | 20 MHz/QPSK | 1 | 0 | 0 | 15.9 | 0.802 | 0.92 |
| | ---- | | 2680 | 41490 | 20 MHz/QPSK | 1 | 0 | 0 | 16.0 | 0.811 | 0.91 |
| | ---- | | 2593 | 40620 | 20 MHz/QPSK | 50 | 24 | 0 | 14.6 | 0.643 | 0.79 |
| | ---- | | 2593 | 40620 | 20 MHz/QPSK | 100 | 0 | 0 | 14.6 | 0.611 | 0.75 |
| | ---- | Top | 2593 | 40620 | 20 MHz/QPSK | 1 | 0 | 0 | 16.1 | 0.253 | 0.28 |
| | ---- | | 2593 | 40620 | 20 MHz/QPSK | 50 | 24 | 0 | 14.6 | 0.221 | 0.27 |
| | ---- | Left | 2593 | 40620 | 20 MHz/QPSK | 1 | 0 | 0 | 16.1 | 0.348 | 0.38 |
| | ---- | | 2593 | 40620 | 20 MHz/QPSK | 50 | 24 | 0 | 14.6 | 0.244 | 0.30 |
| | ---- | Laptop | 2593 | 40620 | 20 MHz/QPSK | 1 | 0 | 0 | 18.5 | 0.639 | 0.72 |
| | ---- | | 2593 | 40620 | 20 MHz/QPSK | 50 | 24 | 0 | 17.5 | 0.413 | 0.46 |
| | ---- | Repeated | 2593 | 40620 | 20 MHz/QPSK | 1 | 0 | 0 | 16.1 | 0.826 | 0.91 |

Body
1.6 W/kg (mW/g)
averaged over 1 gram

1. SAR Measurement
 Phantom Configuration Left Head Eli4 Right Head
 SAR Configuration Head Body
2. Test Signal Call Mode Test Code Base Station Simulator
3. Test Configuration With Belt Clip Without Belt Clip N/A
4. Tissue Depth is at least 15.0 cm



Jay M. Moulton
Vice President

LTE TDD testing is performed using the SAR test guidance provided in FCC KDB 941225 D05 v02r05 clause 5.4. TDD is tested at the highest duty factor using UL-DL configuration 0 with special subframe configuration 6 and applying the FDD LTE procedures in KDB 941225 D05 v02r05. SAR testing is performed using the extended cyclic prefix listed in 3GPP TS 36.211 Section 4. A duty cycle of 1:1.58 is the highest duty cycle achievable which was used for testing Band 41.

Note: LTE Band 38 is fully within the frequency bands of Band 41. Therefore, Band 38 was not tested for this report.


SAR Data Summary – 2450 MHz Body 802.11b & BT

MEASUREMENT RESULTS

| Plot | Gap | Antenna | Position | Frequency | | Modulation | Antenna | End Power (dBm) | Measured SAR (W/kg) | Reported SAR (W/kg) |
|-------|------|---------|----------|-----------|-----|------------|---------|--------------------|------------------------|------------------------|
| | | | | MHz | Ch. | | | | | |
| ----- | 0 mm | Inpaq | Back | 2437 | 6 | DSSS | Main | 18.00 | 0.290 | 0.29 |
| ----- | | | | 2437 | 6 | DSSS | Aux | 18.00 | 0.297 | 0.30 |
| ----- | | | Bottom | 2437 | 6 | DSSS | Main | 18.00 | 0.909 | 0.91 |
| ----- | | | | 2462 | 11 | DSSS | | 18.00 | 0.947 | 0.95 |
| 13 | | | | 2437 | 6 | DSSS | Aux | 18.00 | 1.04 | 1.04 |
| ----- | | | | 2462 | 11 | DSSS | | 18.00 | 0.969 | 0.97 |
| ----- | | | Laptop | 2437 | 6 | DSSS | Main | 21.00 | 0.100 | 0.10 |
| ----- | | | | 2437 | 6 | DSSS | Aux | 21.00 | 0.104 | 0.10 |
| ----- | | | Back | 2440 | 39 | GFSK | Aux | 11.00 | 0.0263 | 0.03 |
| ----- | | | Bottom | 2440 | 39 | GFSK | | 11.00 | 0.0974 | 0.10 |
| ----- | | | Laptop | 2440 | 39 | GFSK | | 11.00 | 0.0138 | 0.01 |
| ----- | | | Repeated | 2437 | 6 | DSSS | Aux | 18.00 | 1.02 | 1.02 |

Body
1.6 W/kg (mW/g)
 averaged over 1 gram

1. Battery is fully charged for all tests.
 Power Measured Conducted ERP EIRP
2. SAR Measurement
 Phantom Configuration Left Head Eli4 Right Head
 SAR Configuration Head Body
3. Test Signal Call Mode Test Code Base Station Simulator
4. Test Configuration With Belt Clip Without Belt Clip N/A
5. Tissue Depth is at least 15.0 cm



 Jay M. Moulton
 Vice President


SAR Data Summary – 5250 MHz Body 802.11a

MEASUREMENT RESULTS

| Plot | Gap | Antenna | Position | Frequency | | Modulation | Antenna | End Power (dBm) | Measured SAR (W/kg) | Reported SAR (W/kg) |
|------|------|---------|----------|-----------|------|------------|---------|--------------------|------------------------|------------------------|
| | | | | MHz | Ch. | | | | | |
| ---- | 0 mm | Inpaq | Back | 5300 | 60 | OFDM | Main | 15.50 | 0.233 | 0.23 |
| ---- | | | | 5300 | 60 | OFDM | Aux | 15.00 | 0.191 | 0.19 |
| ---- | | | Bottom | 5280 | 56 | OFDM | Main | 15.50 | 0.757 | 0.76 |
| 14 | | | | 5300 | 60 | OFDM | | 15.50 | 0.813 | 0.81 |
| ---- | | | | 5280 | 56 | OFDM | Aux | 15.00 | 0.662 | 0.66 |
| ---- | | | 5300 | 60 | OFDM | 15.00 | | 0.669 | 0.67 | |
| ---- | | | Laptop | 5300 | 60 | OFDM | Main | 21.00 | 0.168 | 0.17 |
| ---- | | | | 5300 | 60 | OFDM | Aux | 21.00 | 0.153 | 0.15 |
| ---- | | | Repeated | 5300 | 60 | OFDM | Main | 15.50 | 0.798 | 0.80 |

Body
1.6 W/kg (mW/g)
 averaged over 1 gram

- Battery is fully charged for all tests.
 Power Measured Conducted ERP EIRP
- SAR Measurement
 Phantom Configuration Left Head Eli4 Right Head
 SAR Configuration Head Body
- Test Signal Call Mode Test Code Base Station Simulator
- Test Configuration With Belt Clip Without Belt Clip N/A
- Tissue Depth is at least 15.0 cm

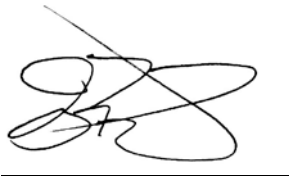

Jay M. Moulton
 Vice President


SAR Data Summary – 5600 MHz Body 802.11a

MEASUREMENT RESULTS

| Plot | Gap | Antenna | Position | Frequency | | Modulation | Antenna | End Power (dBm) | Measured SAR (W/kg) | Reported SAR (W/kg) |
|------|------|---------|----------|-----------|------|------------|---------|-----------------|---------------------|---------------------|
| | | | | MHz | Ch. | | | | | |
| ---- | 0 mm | Inpaq | Back | 5620 | 124 | OFDM | Main | 15.50 | 0.290 | 0.29 |
| ---- | | | | 5620 | 124 | OFDM | Aux | 15.00 | 0.250 | 0.25 |
| ---- | | | Bottom | 5580 | 116 | OFDM | Main | 15.50 | 0.777 | 0.78 |
| 15 | | | | 5620 | 124 | OFDM | | 15.50 | 0.800 | 0.80 |
| ---- | | | | 5580 | 116 | OFDM | Aux | 15.00 | 0.745 | 0.75 |
| ---- | | | 5620 | 124 | OFDM | 15.00 | | 0.763 | 0.76 | |
| ---- | | | Laptop | 5620 | 124 | OFDM | Main | 21.00 | 0.215 | 0.22 |
| ---- | | | | 5620 | 124 | OFDM | Aux | 21.00 | 0.215 | 0.22 |
| ---- | | | Repeated | 5620 | 124 | OFDM | Aux | 15.00 | 0.786 | 0.79 |

Body
1.6 W/kg (mW/g)
 averaged over 1 gram

- Battery is fully charged for all tests.
 Power Measured Conducted ERP EIRP
- SAR Measurement
 Phantom Configuration Left Head Eli4 Right Head
 SAR Configuration Head Body
- Test Signal Call Mode Test Code Base Station Simulator
- Test Configuration With Belt Clip Without Belt Clip N/A
- Tissue Depth is at least 15.0 cm



Jay M. Moulton
 Vice President


SAR Data Summary – 5800 MHz Body 802.11a

MEASUREMENT RESULTS

| Plot | Gap | Antenna | Position | Frequency | | Modulation | Antenna | End Power (dBm) | Measured SAR (W/kg) | Reported SAR (W/kg) | |
|-------|------|---------|----------|-----------|------|------------|---------|--------------------|------------------------|------------------------|------|
| | | | | MHz | Ch. | | | | | | |
| ----- | 0 mm | Inpaq | Back | 5785 | 157 | OFDM | Main | 15.50 | 0.260 | 0.26 | |
| ----- | | | | 5785 | 157 | OFDM | Aux | 15.00 | 0.211 | 0.21 | |
| 16 | | | Bottom | 5785 | 157 | OFDM | Main | 15.50 | 0.831 | 0.83 | |
| ----- | | | | 5825 | 165 | OFDM | | 15.50 | 0.811 | 0.81 | |
| ----- | | | | 5785 | 157 | OFDM | Aux | 15.00 | 0.705 | 0.71 | |
| ----- | | | | 5825 | 165 | OFDM | | 15.00 | 0.697 | 0.70 | |
| ----- | | | | Laptop | 5785 | 157 | OFDM | Main | 21.00 | 0.426 | 0.43 |
| ----- | | | | | 5825 | 165 | OFDM | | 21.00 | 0.458 | 0.46 |
| ----- | | | 5785 | | 157 | OFDM | Aux | 21.00 | 0.378 | 0.38 | |
| ----- | | | Repeated | 5785 | 157 | OFDM | Main | 15.50 | 0.814 | 0.81 | |

Body
1.6 W/kg (mW/g)
 averaged over 1 gram

1. Battery is fully charged for all tests.
 Power Measured Conducted ERP EIRP
2. SAR Measurement
 Phantom Configuration Left Head Eli4 Right Head
 SAR Configuration Head Body
3. Test Signal Call Mode Test Code Base Station Simulator
4. Test Configuration With Belt Clip Without Belt Clip N/A
5. Tissue Depth is at least 15.0 cm

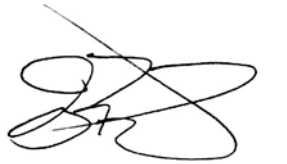

Jay M. Moulton
 Vice President

SAR Data Summary – Simultaneous Evaluation

MEASUREMENT RESULTS – WWAN-WiFi (Main)

| Position | Frequency | | Maxima | | | Frequency | | Maxima | | | SAR ₁ | SAR ₂ | SAR Total |
|----------|-----------|-----|--------|--------|-------|-----------|--------|--------|---------|-------|------------------|------------------|-----------|
| | MHz | Ch. | X | Y | Z | MHz | Ch. | X | Y | Z | | | |
| Back | 2437 | 6 | 105.00 | -22.00 | -1.16 | 707.5 | 23095 | -75.54 | 148.80 | -1.38 | 0.29 | 1.41 | 1.70 |
| Top | Estimated | | | | | 821.5 | 26740 | -4.90 | -105.51 | -1.82 | 0.40 | 1.27 | 1.67 |
| Bottom | 2462 | 11 | ----- | ----- | ----- | Estimated | | | | | 0.95 | 0.40 | 1.35 |
| Left | Estimated | | | | | 1770 | 132571 | -7.32 | 56.71 | -1.09 | 0.40 | 1.33 | 1.73 |
| Laptop | 5825 | 165 | 110.80 | 37.20 | -0.80 | 1880 | 9400 | -54.93 | -141.78 | -0.55 | 0.46 | 1.42 | 1.88 |

Body
1.6 W/kg (mW/g)
averaged over 1 gram

Back – 248.53 mm SPLSR=0.01
 Top – 135.40 mm (Min) SPLSR=0.02
 Left – 135.40 mm (Min) SPLSR=0.02
 Laptop – 243.93 mm SPLSR=0.02 See Plot 1 Below

Simultaneous Separation Ratio Calculation

$(SAR_1 + SAR_2)^{1.5}/R_i \leq 0.04$ rounded to two digits

MEASUREMENT RESULTS – WWAN-WiFi (Aux)

| Position | Frequency | | Maxima | | | Frequency | | Maxima | | | SAR ₁ | SAR ₂ | SAR Total |
|----------|-----------|-----|--------|-------|-------|-----------|--------|--------|---------|-------|------------------|------------------|-----------|
| | MHz | Ch. | X | Y | Z | MHz | Ch. | X | Y | Z | | | |
| Back | 2437 | 6 | 94.00 | 14.00 | -1.61 | 707.5 | 23095 | -75.54 | 148.80 | -1.38 | 0.30 | 1.41 | 1.71 |
| Top | Estimated | | | | | 821.5 | 26740 | -4.90 | -105.51 | -1.82 | 0.40 | 1.27 | 1.67 |
| Bottom | 2437 | 6 | ----- | ----- | ----- | Estimated | | | | | 1.04 | 0.40 | 1.44 |
| Left | Estimated | | | | | 1770 | 132571 | -7.32 | 56.71 | -1.09 | 0.40 | 1.33 | 1.73 |
| Laptop | 5785 | 157 | 110.60 | -6.20 | -0.85 | 1880 | 9400 | -54.93 | -141.78 | -0.55 | 0.38 | 1.42 | 1.80 |

Body
1.6 W/kg (mW/g)
averaged over 1 gram

Back – 216.60 mm SPLSR=0.01
 Top – 135.40 mm (Min) SPLSR=0.02
 Left – 135.40 mm (Min) SPLSR=0.02
 Laptop – 213.97 mm SPLSR=0.02 See Plot 2 Below

Simultaneous Separation Ratio Calculation

$(SAR_1 + SAR_2)^{1.5}/R_i \leq 0.04$ rounded to two digits

| MEASUREMENT RESULTS – BT | | | | | | | | |
|--------------------------|-----|------------|-----------|-----|------------|------------------|------------------|-----------|
| Frequency | | Modulation | Frequency | | Modulation | SAR ₁ | SAR ₂ | SAR Total |
| MHz | Ch. | | MHz | Ch. | | | | |
| 2462 | 11 | DSSS | 2440 | 39 | GFSK | 0.95 | 0.10 | 1.05 |
| 5300 | 60 | OFDM | 2440 | 39 | GFSK | 0.81 | 0.10 | 0.91 |
| 5620 | 124 | OFDM | 2440 | 39 | GFSK | 0.80 | 0.10 | 0.90 |
| 5745 | 157 | OFDM | 2440 | 39 | GFSK | 0.83 | 0.10 | 0.93 |

Body
1.6 W/kg (mW/g)
averaged over 1 gram

The sum of the two transmitters is less than the limit; therefore, the simultaneous transmission meets the requirements of KDB447498 D01 v06 section 4.3.2 page 11.

| MEASUREMENT RESULTS – WiFi (Main)-WiFi (Aux) | | | | | | | | | | | | | |
|--|-----------|-----|--------|--------|-------|-----------|-----|--------|--------|-------|------------------|------------------|-----------|
| Position | Frequency | | Maxima | | | Frequency | | Maxima | | | SAR ₁ | SAR ₂ | SAR Total |
| | MHz | Ch. | X | Y | Z | MHz | Ch. | X | Y | Z | | | |
| Back | 2437 | 6 | ----- | ----- | ----- | 2437 | 6 | ----- | ----- | ----- | 0.29 | 0.30 | 0.59 |
| Bottom | 2462 | 11 | -23.00 | -34.00 | -1.79 | 2437 | 6 | -21.00 | -32.00 | -1.84 | 0.95 | 1.04 | 1.99 |
| Laptop | 5825 | 165 | ----- | ----- | ----- | 5785 | 157 | ----- | ----- | ----- | 0.46 | 0.38 | 0.84 |


Body
1.6 W/kg (mW/g)
 averaged over 1 gram

Bottom – 66.03 mm SPLSR=0.04 See Plot 3 Below


Simultaneous Separation Ratio Calculation

$(SAR_1 + SAR_2)^{1.5}/R_i \leq 0.04$ rounded to two digits


Plot 1

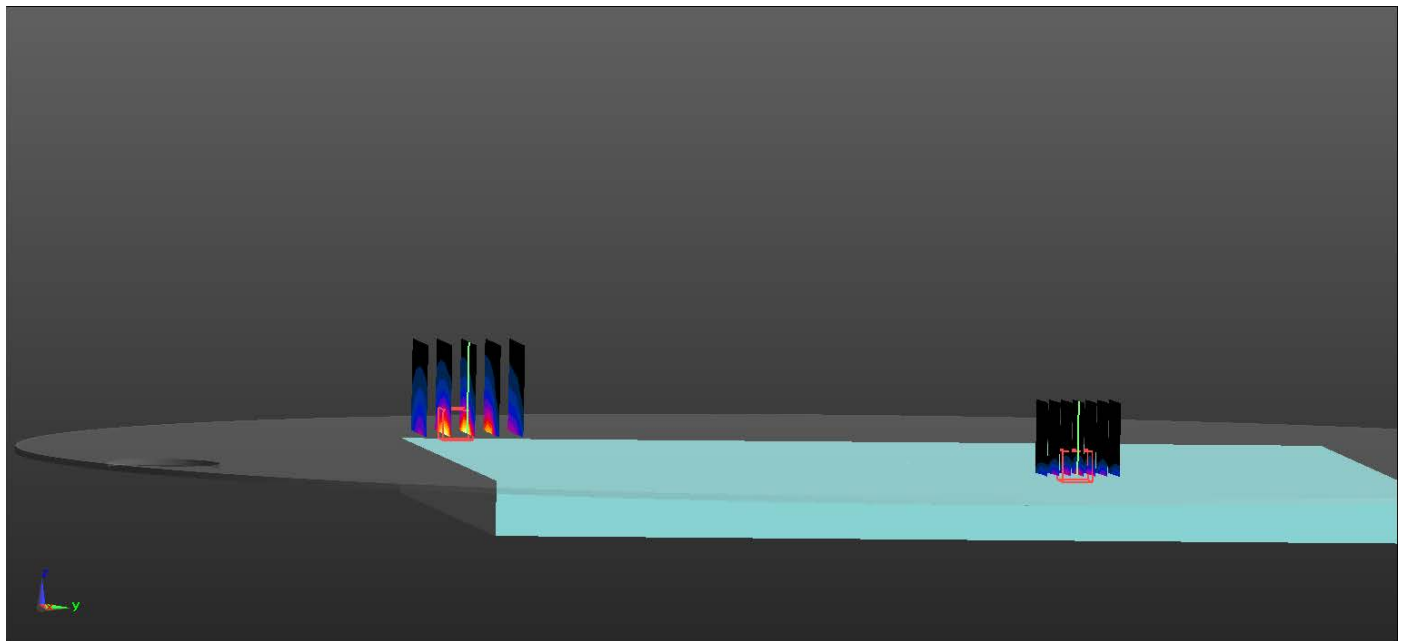

Plot 2

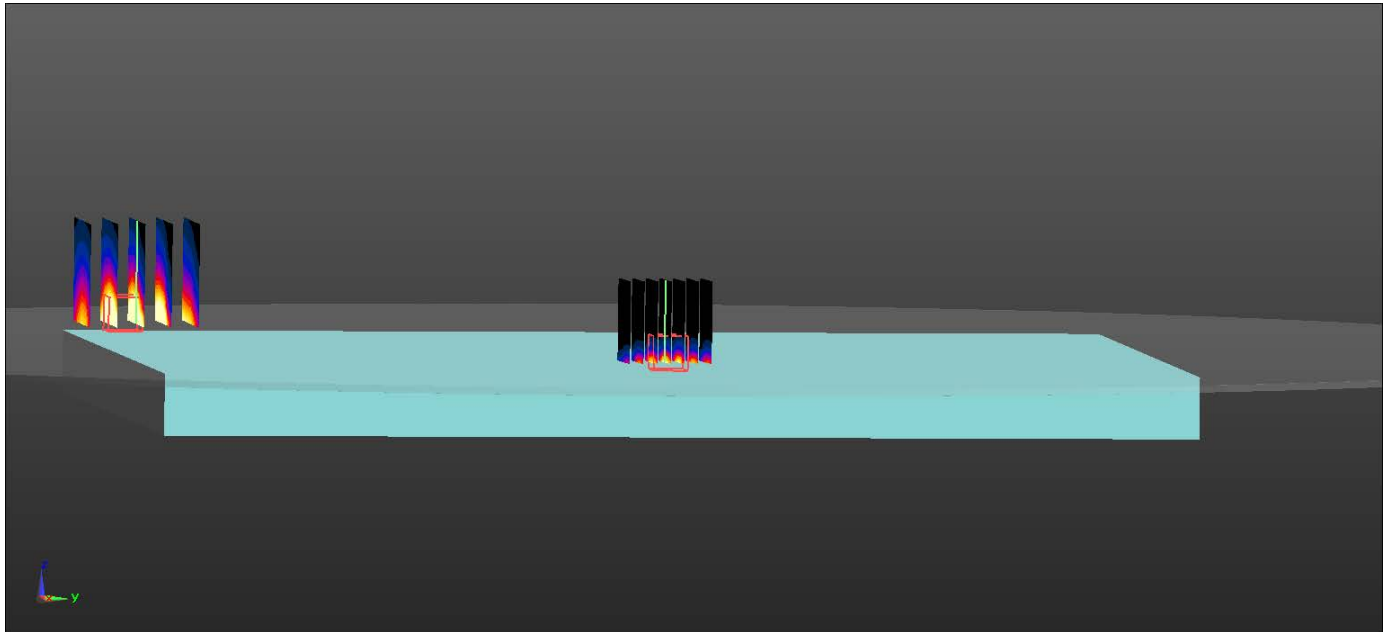

Plot 3

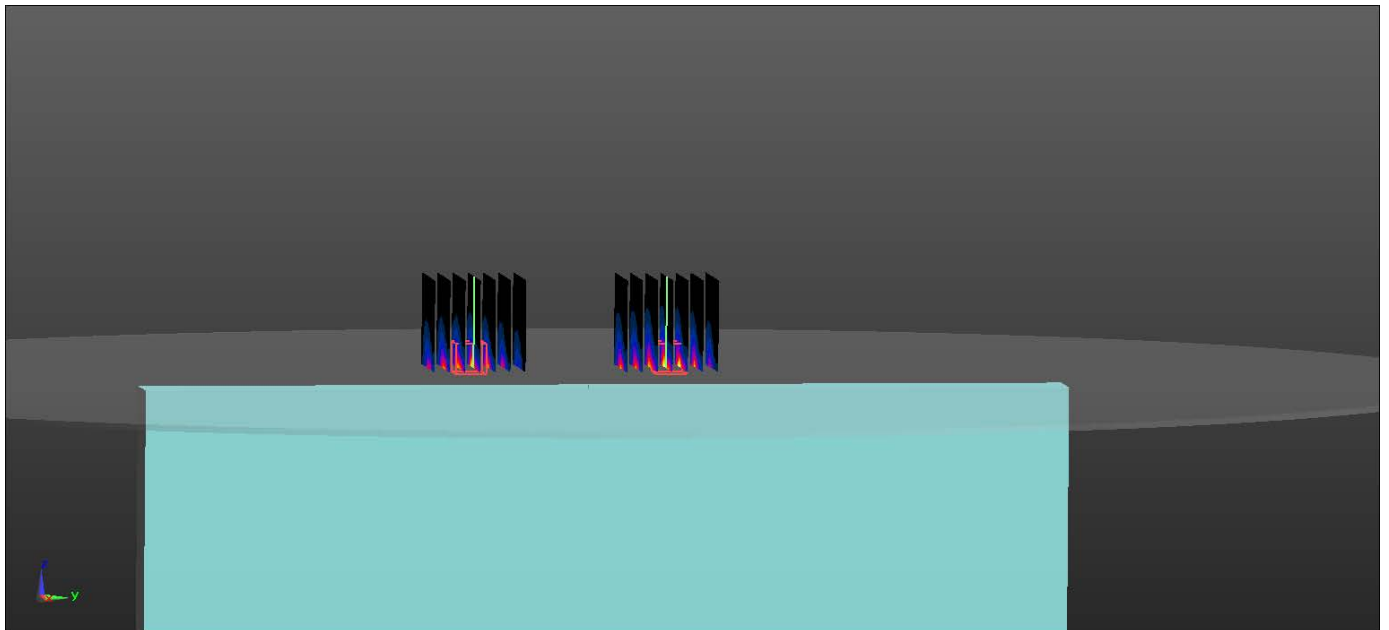

11. Test Equipment List

Table 11.1 Equipment Specifications

| Type | Calibration Due Date | Calibration Done Date | Serial Number |
|--|----------------------|-----------------------|-----------------|
| Staubli Robot TX60L | N/A | N/A | F07/55M6A1/A/01 |
| Measurement Controller CS8c | N/A | N/A | 1012 |
| ELI4 Flat Phantom | N/A | N/A | 1065 |
| Device Holder | N/A | N/A | N/A |
| Data Acquisition Electronics 4 | 01/10/2020 | 01/10/2019 | 1321 |
| Data Acquisition Electronics 4 | 04/16/2020 | 04/16/2019 | 1416 |
| SPEAG E-Field Probe EX3DV4 | 04/24/2020 | 04/24/2019 | 3662 |
| SPEAG E-Field Probe EX3DV4 | 04/03/2020 | 04/03/2019 | 7530 |
| Speag Validation Dipole D750V2 | 07/13/2019 | 07/13/2018 | 1016 |
| Speag Validation Dipole D835V2 | 07/13/2019 | 07/13/2018 | 4d089 |
| Speag Validation Dipole D1750V2 | 07/20/2019 | 07/20/2018 | 1018 |
| Speag Validation Dipole D1900V2 | 07/13/2019 | 07/13/2018 | 5d116 |
| Speag Validation Dipole D2300V2 | 08/20/2019 | 08/20/2018 | 1060 |
| Speag Validation Dipole D2550V2 | 07/12/2019 | 07/12/2018 | 1003 |
| Speag Validation Dipole D2450V2 | 07/12/2019 | 07/12/2018 | 829 |
| Speag Validation Dipole D5GHzV2 | 07/19/2019 | 07/19/2018 | 1085 |
| Agilent N1911A Power Meter | 04/27/2020 | 04/27/2019 | GB45100254 |
| Agilent N1922A Power Sensor | 04/27/2020 | 04/27/2019 | MY45240464 |
| Advantest R3261A Spectrum Analyzer | 03/25/2020 | 03/25/2019 | 31720068 |
| Agilent (HP) 8350B Signal Generator | 03/20/2020 | 03/20/2019 | 2749A10226 |
| Agilent (HP) 83525A RF Plug-In | 03/20/2020 | 03/20/2019 | 2647A01172 |
| Agilent (HP) 8753C Vector Network Analyzer | 03/20/2020 | 03/20/2019 | 3135A01724 |
| Agilent (HP) 85047A S-Parameter Test Set | 03/20/2020 | 03/20/2019 | 2904A00595 |
| Agilent (HP) 8960 Base Station Sim. | 03/19/2020 | 03/19/2019 | MY48360364 |
| Anritsu MT8820C | 01/26/2020 | 01/26/2019 | 6201176199 |
| Apriel Dielectric Probe Assembly | N/A | N/A | 0011 |
| Body Equivalent Matter (750 MHz) | N/A | N/A | N/A |
| Body Equivalent Matter (835 MHz) | N/A | N/A | N/A |
| Body Equivalent Matter (1750 MHz) | N/A | N/A | N/A |
| Body Equivalent Matter (1900 MHz) | N/A | N/A | N/A |
| Body Equivalent Matter (2300 MHz) | N/A | N/A | N/A |
| Body Equivalent Matter (2550 MHz) | N/A | N/A | N/A |
| Body Equivalent Matter (2450 MHz) | N/A | N/A | N/A |
| Body Equivalent Matter (5 GHz) | N/A | N/A | N/A |

12. Conclusion

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the FCC/IC. These measurements are taken to simulate the RF effects exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters subject to the test. The test results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body is a very complex phenomena that depends on the mass, shape, and size of the body; the orientation of the body with respect to the field vectors; and, the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because innumerable factors may interact to determine the specific biological outcome of an exposure to electromagnetic fields, any protection guide shall consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.

13. References

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radio Frequency Radiation, August 1996

- [2] ANSI/IEEE C95.1 – 1992, American National Standard Safety Levels with respect to Human Exposure to Radio Frequency Electromagnetic Fields, 300kHz to 100GHz, New York: IEEE, 1992.

- [3] ANSI/IEEE C95.3 – 1992, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave, New York: IEEE, 1992.

- [4] International Electrotechnical Commission, IEC 62209-2 (Edition 1.0), Human Exposure to radio frequency fields from hand-held and body mounted wireless communication devices – Human models, instrumentation, and procedures – Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), March 2010.

- [5] IEEE Standard 1528 – 2013, IEEE Recommended Practice for Determining the Peak-Spatial Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communication Devices: Measurement Techniques, June 2013.

- [6] Industry Canada, RSS – 102 Issue 5, Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands), March 2015.

- [7] Health Canada, Safety Code 6, Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3kHz to 300 GHz, 2009.

Appendix A – System Validation Plots and Data

Test Result for UIM Dielectric Parameter

Mon 01/Jul/2019

Freq Frequency(GHz)

FCC_eB Limits for Body Epsilon

FCC_sB Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

| Freq | FCC_eB | FCC_sB | Test_e | Test_s |
|--------|--------|--------|--------|--------|
| 0.7000 | 55.73 | 0.96 | 55.08 | 0.96 |
| 0.7040 | 55.714 | 0.96 | 55.068 | 0.964* |
| 0.7075 | 55.70 | 0.96 | 55.058 | 0.968* |
| 0.7100 | 55.69 | 0.96 | 55.05 | 0.97 |
| 0.7110 | 55.686 | 0.96 | 55.047 | 0.97* |
| 0.7200 | 55.65 | 0.96 | 55.02 | 0.97 |
| 0.7300 | 55.61 | 0.96 | 54.99 | 0.98 |
| 0.7400 | 55.57 | 0.96 | 54.96 | 0.98 |
| 0.7500 | 55.53 | 0.96 | 54.93 | 0.98 |
| 0.7600 | 55.49 | 0.96 | 54.90 | 0.98 |
| 0.7700 | 55.45 | 0.96 | 54.86 | 0.99 |
| 0.7800 | 55.41 | 0.97 | 54.82 | 0.99 |
| 0.7820 | 55.404 | 0.97 | 54.812 | 0.99* |
| 0.7900 | 55.38 | 0.97 | 54.78 | 0.99 |
| 0.7930 | 55.368 | 0.97 | 54.768 | 0.993* |
| 0.8000 | 55.34 | 0.97 | 54.74 | 1.00 |

* value interpolated

Test Result for UIM Dielectric Parameter

Tue 09/Jul/2019

Freq Frequency(GHz)

FCC_eB Limits for Body Epsilon

FCC_sB Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

| Freq | FCC_eB | FCC_sB | Test_e | Test_s |
|--------|--------|--------|--------|--------|
| 0.8050 | 55.32 | 0.97 | 55.13 | 0.99 |
| 0.8150 | 55.28 | 0.97 | 55.08 | 1.00 |
| 0.8190 | 55.264 | 0.97 | 55.06 | 1.00* |
| 0.8250 | 55.24 | 0.97 | 55.03 | 1.00 |
| 0.8264 | 55.234 | 0.97 | 55.024 | 1.001* |
| 0.8290 | 55.224 | 0.97 | 55.014 | 1.004* |
| 0.8315 | 55.214 | 0.97 | 55.004 | 1.007* |
| 0.8350 | 55.20 | 0.97 | 54.99 | 1.01 |
| 0.8365 | 55.196 | 0.972 | 54.983 | 1.01* |
| 0.8366 | 55.195 | 0.972 | 54.982 | 1.01* |
| 0.8440 | 55.173 | 0.979 | 54.945 | 1.01* |
| 0.8450 | 55.17 | 0.98 | 54.94 | 1.01 |
| 0.8466 | 55.165 | 0.982 | 54.937 | 1.012* |
| 0.8550 | 55.14 | 0.99 | 54.92 | 1.02 |
| 0.8650 | 55.11 | 1.01 | 54.88 | 1.03 |
| 0.8750 | 55.08 | 1.02 | 54.865 | 1.04 |
| 0.8850 | 55.05 | 1.03 | 54.81 | 1.05 |
| 0.8950 | 55.02 | 1.04 | 54.787 | 1.06 |

* value interpolated

Test Result for UIM Dielectric Parameter

Mon 08/Jul/2019

Freq Frequency(GHz)

FCC_eB Limits for Body Epsilon

FCC_sB Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

| Freq | FCC_eB | FCC_sB | Test_e | Test_s |
|--------|--------|--------|--------|--------|
| 1.7100 | 53.53 | 1.47 | 53.04 | 1.47 |
| 1.7124 | 53.525 | 1.47 | 53.033 | 1.472* |
| 1.7200 | 53.51 | 1.47 | 53.01 | 1.48 |
| 1.7300 | 53.48 | 1.48 | 52.87 | 1.49 |
| 1.7325 | 53.475 | 1.48 | 52.865 | 1.493* |
| 1.7326 | 53.475 | 1.48 | 52.865 | 1.493* |
| 1.7400 | 53.46 | 1.48 | 52.85 | 1.50 |
| 1.7450 | 53.445 | 1.485 | 52.83 | 1.505* |
| 1.7500 | 53.43 | 1.49 | 52.81 | 1.51 |
| 1.7526 | 53.425 | 1.49 | 52.805 | 1.513* |
| 1.7600 | 53.41 | 1.49 | 52.79 | 1.52 |
| 1.7700 | 53.38 | 1.50 | 52.76 | 1.53 |
| 1.7800 | 53.35 | 1.51 | 52.72 | 1.54 |

* value interpolated

Test Result for UIM Dielectric Parameter

Mon 08/Jul/2019

Freq Frequency(GHz)

FCC_eB Limits for Body Epsilon

FCC_sB Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

| Freq | FCC_eB | FCC_sB | Test_e | Test_s |
|--------|--------|--------|--------|--------|
| 1.8400 | 53.30 | 1.52 | 52.75 | 1.53 |
| 1.8500 | 53.30 | 1.52 | 52.74 | 1.54 |
| 1.8524 | 53.30 | 1.52 | 52.733 | 1.54* |
| 1.8600 | 53.30 | 1.52 | 52.71 | 1.54 |
| 1.8700 | 53.30 | 1.52 | 52.70 | 1.54 |
| 1.8800 | 53.30 | 1.52 | 52.66 | 1.55 |
| 1.8825 | 53.30 | 1.52 | 52.653 | 1.55* |
| 1.8900 | 53.30 | 1.52 | 52.63 | 1.55 |
| 1.9000 | 53.30 | 1.52 | 52.61 | 1.55 |
| 1.9050 | 53.30 | 1.52 | 52.595 | 1.555* |
| 1.9076 | 53.30 | 1.52 | 52.592 | 1.558* |
| 1.9100 | 53.30 | 1.52 | 52.58 | 1.56 |
| 1.9200 | 53.30 | 1.52 | 52.56 | 1.56 |

* value interpolated

Test Result for UIM Dielectric Parameter

Tue 02/Jul/2019

Freq Frequency(GHz)

FCC_eB Limits for Body Epsilon

FCC_sB Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

| Freq | FCC_eB | FCC_sB | Test_e | Test_s |
|--------|--------|--------|--------|--------|
| 2.2900 | 52.91 | 1.80 | 52.28 | 1.82 |
| 2.3000 | 52.90 | 1.81 | 52.26 | 1.83 |
| 2.3100 | 52.89 | 1.82 | 52.24 | 1.84 |
| 2.3200 | 52.87 | 1.83 | 52.22 | 1.85 |
| 2.3300 | 52.86 | 1.84 | 52.21 | 1.86 |
| 2.3400 | 52.85 | 1.84 | 52.19 | 1.87 |
| 2.3500 | 52.83 | 1.85 | 52.17 | 1.88 |

Test Result for UIM Dielectric Parameter

Tue 02/Jul/2019

Freq Frequency(GHz)

FCC_eB Limits for Body Epsilon

FCC_sB Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

| Freq | FCC_eB | FCC_sB | Test_e | Test_s |
|--------|--------|--------|--------|--------|
| 2.4900 | 52.65 | 2.01 | 51.86 | 2.03 |
| 2.5000 | 52.64 | 2.02 | 51.84 | 2.04 |
| 2.5060 | 52.628 | 2.032 | 51.822 | 2.052* |
| 2.5100 | 52.62 | 2.04 | 51.81 | 2.06 |
| 2.5200 | 52.61 | 2.05 | 51.78 | 2.08 |
| 2.5300 | 52.60 | 2.06 | 51.76 | 2.10 |
| 2.5350 | 52.595 | 2.07 | 51.755 | 2.11* |
| 2.5400 | 52.59 | 2.08 | 51.75 | 2.12 |
| 2.5495 | 52.571 | 2.09 | 51.731 | 2.125* |
| 2.5500 | 52.57 | 2.09 | 51.73 | 2.13 |
| 2.5600 | 52.56 | 2.11 | 51.71 | 2.14 |
| 2.5700 | 52.55 | 2.12 | 51.69 | 2.15 |
| 2.5800 | 52.53 | 2.13 | 51.68 | 2.16 |
| 2.5900 | 52.52 | 2.15 | 51.65 | 2.18 |
| 2.5930 | 52.517 | 2.153 | 51.647 | 2.186* |
| 2.5950 | 52.515 | 2.155 | 51.645 | 2.19* |
| 2.6000 | 52.51 | 2.16 | 51.64 | 2.20 |
| 2.6100 | 52.50 | 2.18 | 51.61 | 2.21 |
| 2.6200 | 52.48 | 2.19 | 51.59 | 2.22 |
| 2.6300 | 52.47 | 2.21 | 51.58 | 2.24 |
| 2.6365 | 52.464 | 2.217 | 51.567 | 2.253* |
| 2.6400 | 52.46 | 2.22 | 51.56 | 2.26 |
| 2.6500 | 52.45 | 2.23 | 51.55 | 2.27 |
| 2.6600 | 52.43 | 2.25 | 51.53 | 2.29 |
| 2.6700 | 52.42 | 2.26 | 51.51 | 2.30 |
| 2.6800 | 52.41 | 2.28 | 51.49 | 2.32 |
| 2.6900 | 52.39 | 2.29 | 51.46 | 2.34 |
| 2.7000 | 52.38 | 2.30 | 51.45 | 2.35 |
| 2.8000 | 52.37 | 2.31 | 51.43 | 2.36 |

* value interpolated

Test Result for UIM Dielectric Parameter

Tue 02/Jul/2019

Freq Frequency(GHz)

FCC_eB Limits for Body Epsilon

FCC_sB Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

| Freq | FCC_eB | FCC_sB | Test_e | Test_s |
|--------|--------|--------|--------|--------|
| 2.4100 | 52.75 | 1.91 | 52.85 | 1.88 |
| 2.4120 | 52.748 | 1.912 | 52.846 | 1.882* |
| 2.4200 | 52.74 | 1.92 | 52.83 | 1.89 |
| 2.4300 | 52.73 | 1.93 | 52.81 | 1.90 |
| 2.4370 | 52.716 | 1.937 | 52.796 | 1.907* |
| 2.4400 | 52.71 | 1.94 | 52.79 | 1.91 |
| 2.4500 | 52.70 | 1.95 | 52.77 | 1.92 |
| 2.4600 | 52.69 | 1.96 | 52.75 | 1.93 |
| 2.4620 | 52.686 | 1.964 | 52.746 | 1.932* |
| 2.4700 | 52.67 | 1.98 | 52.73 | 1.94 |
| 2.4800 | 52.66 | 1.99 | 52.71 | 1.95 |

* value interpolated

Test Result for UIM Dielectric Parameter

Mon 01/Jul/2019

Freq Frequency(GHz)

FCC_eB Limits for Body Epsilon

FCC_sB Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

| Freq | FCC_eB | FCC_sB | Test_e | Test_s |
|--------|--------|--------|--------|--------|
| 5.1000 | 49.15 | 5.18 | 49.22 | 5.10 |
| 5.1200 | 49.12 | 5.21 | 49.19 | 5.12 |
| 5.1400 | 49.10 | 5.23 | 49.16 | 5.14 |
| 5.1600 | 49.07 | 5.25 | 49.13 | 5.16 |
| 5.1800 | 49.04 | 5.28 | 49.10 | 5.19 |
| 5.2000 | 49.01 | 5.30 | 49.07 | 5.21 |
| 5.2100 | 49.00 | 5.31 | 49.055 | 5.22* |
| 5.2200 | 48.99 | 5.32 | 49.04 | 5.23 |
| 5.2400 | 48.96 | 5.35 | 49.01 | 5.25 |
| 5.2500 | 48.945 | 5.36 | 48.995 | 5.265* |
| 5.2600 | 48.93 | 5.37 | 48.98 | 5.28 |
| 5.2800 | 48.91 | 5.39 | 48.95 | 5.31 |
| 5.2900 | 48.895 | 5.405 | 48.935 | 5.32* |
| 5.3000 | 48.88 | 5.42 | 48.92 | 5.33 |
| 5.3200 | 48.85 | 5.44 | 48.89 | 5.36 |
| 5.3400 | 48.82 | 5.46 | 48.86 | 5.38 |
| 5.3600 | 48.80 | 5.49 | 48.83 | 5.40 |
| 5.3800 | 48.77 | 5.51 | 48.80 | 5.43 |
| 5.4000 | 48.74 | 5.53 | 48.77 | 5.46 |
| 5.4200 | 48.72 | 5.56 | 48.74 | 5.49 |
| 5.4400 | 48.69 | 5.58 | 48.71 | 5.51 |
| 5.4600 | 48.66 | 5.60 | 48.68 | 5.53 |
| 5.4800 | 48.63 | 5.63 | 48.65 | 5.55 |
| 5.5000 | 48.61 | 5.65 | 48.62 | 5.58 |
| 5.5200 | 48.58 | 5.67 | 48.59 | 5.61 |
| 5.5400 | 48.55 | 5.70 | 48.56 | 5.64 |
| 5.5600 | 48.53 | 5.72 | 48.53 | 5.67 |
| 5.5800 | 48.50 | 5.74 | 48.50 | 5.70 |
| 5.6000 | 48.47 | 5.77 | 48.47 | 5.73 |
| 5.6100 | 48.455 | 5.78 | 48.455 | 5.74* |
| 5.6200 | 48.44 | 5.79 | 48.44 | 5.75 |
| 5.6400 | 48.42 | 5.81 | 48.41 | 5.78 |
| 5.6600 | 48.39 | 5.84 | 48.38 | 5.81 |
| 5.6800 | 48.36 | 5.86 | 48.35 | 5.84 |
| 5.7000 | 48.34 | 5.88 | 48.32 | 5.86 |
| 5.7200 | 48.31 | 5.91 | 48.29 | 5.89 |
| 5.7400 | 48.28 | 5.93 | 48.26 | 5.91 |
| 5.7450 | 48.273 | 5.935 | 48.253 | 5.918* |
| 5.7500 | 48.265 | 5.94 | 48.245 | 5.925* |
| 5.7600 | 48.25 | 5.95 | 48.23 | 5.94 |
| 5.7750 | 48.235 | 5.973 | 48.208 | 5.963* |
| 5.7800 | 48.23 | 5.98 | 48.20 | 5.97 |
| 5.7850 | 48.223 | 5.985 | 48.193 | 5.975* |
| 5.8000 | 48.20 | 6.00 | 48.17 | 5.99 |
| 5.8200 | 48.17 | 6.02 | 48.14 | 6.02 |
| 5.8250 | 48.165 | 6.028 | 48.133 | 6.025* |
| 5.8400 | 48.15 | 6.05 | 48.11 | 6.04 |

* value interpolated

RF Exposure Lab

Plot 1

DUT: Dipole 750 MHz D750V3; Type: D750V3; Serial: D750V3 - SN: 1016

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1
Medium: MSL750; Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.98 \text{ S/m}$; $\epsilon_r = 54.93$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section


Test Date: Date: 7/1/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C


Probe: EX3DV4 - SN3662; ConvF(9.55, 9.55, 9.55); Calibrated: 4/24/2019;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/16/2019
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

750 MHz/Verification/Area Scan (5x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 1.03 W/kg

750 MHz/Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 30.596 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 1.32 W/kg
 $P_{in} = 100 \text{ mW}$
SAR(1 g) = 0.861 W/kg; SAR(10 g) = 0.563 W/kg
Maximum value of SAR (measured) = 1.11 W/kg

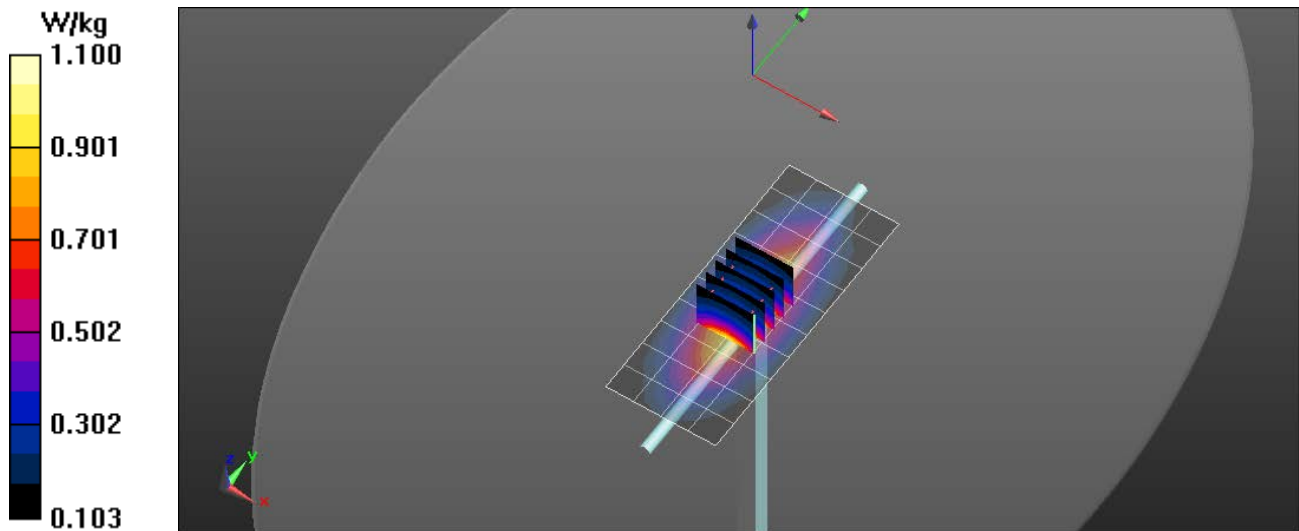

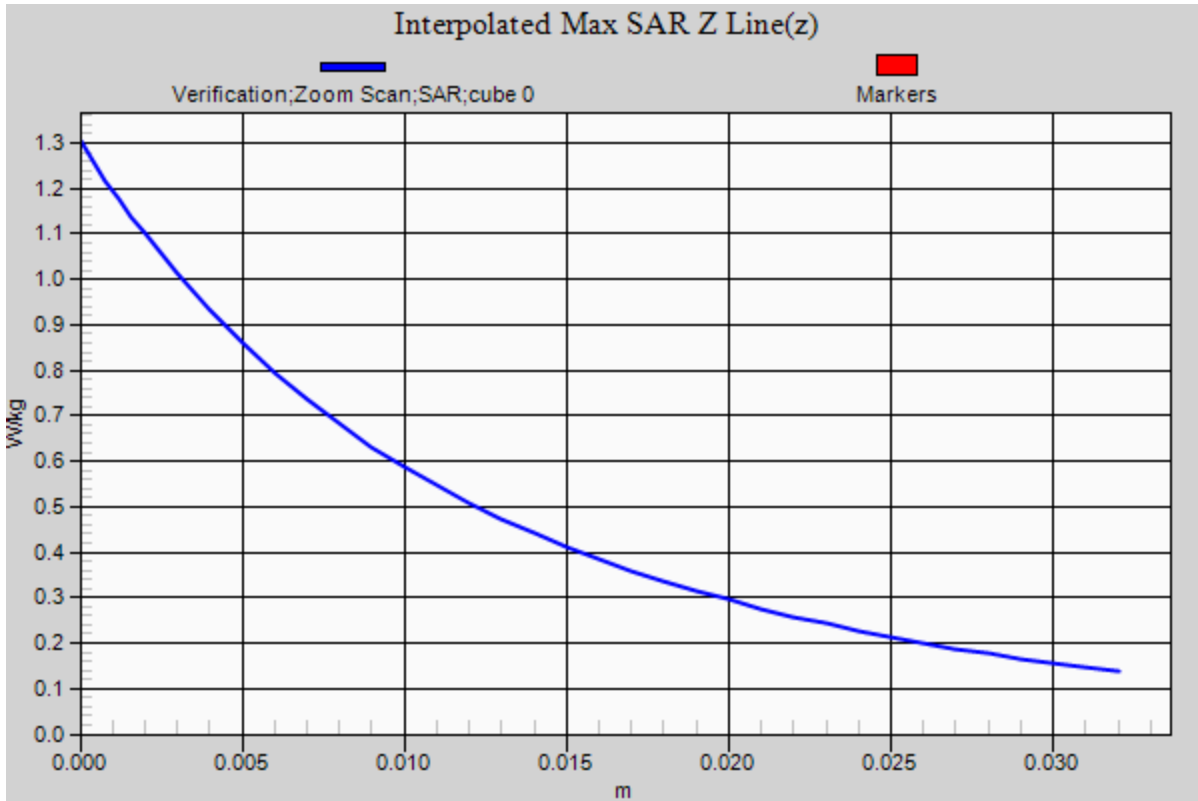

RF Exposure Lab

Plot 2

DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN: 4d089


Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
Medium: MSL835; Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 1.01 \text{ S/m}$; $\epsilon_r = 54.99$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section


Test Date: Date: 7/9/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C
Probe: EX3DV4 - SN3662; ConvF(9.34, 9.34, 9.34); Calibrated: 4/24/2019;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/16/2019
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

835 MHz Body/Verification/Area Scan (81x161x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
Maximum value of SAR (interpolated) = 1.23 W/kg

835 MHz Body/Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 55.029 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 1.43 W/kg
 $P_{in} = 100 \text{ mW}$
SAR(1 g) = 0.952 W/kg; SAR(10 g) = 0.639 W/kg
Maximum value of SAR (measured) = 1.29 W/kg

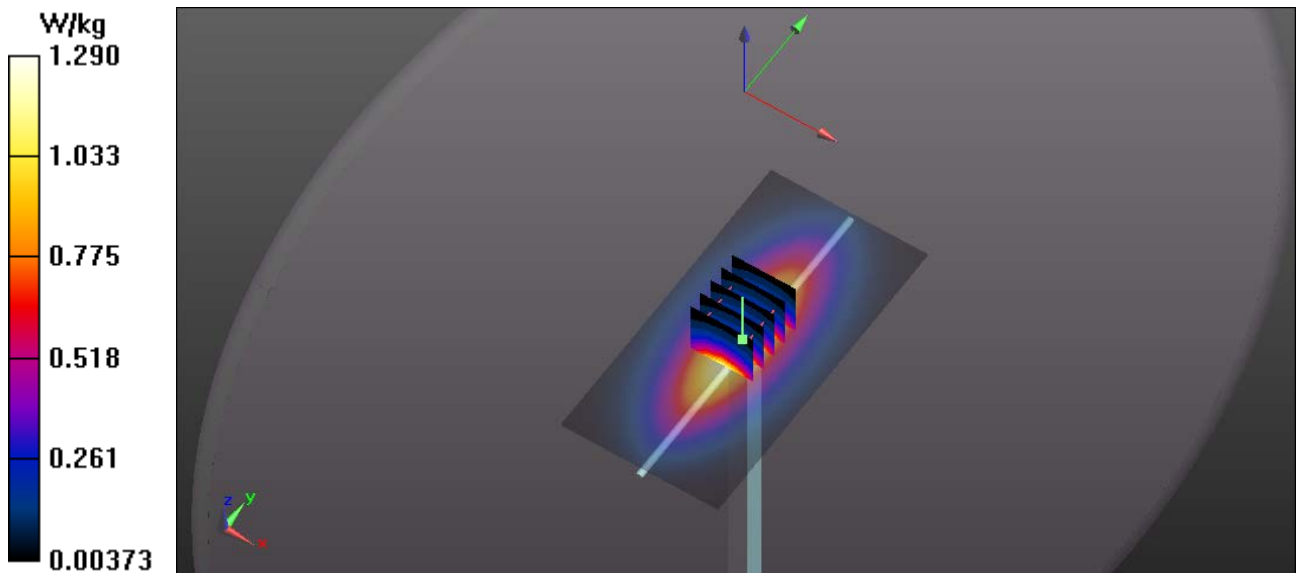

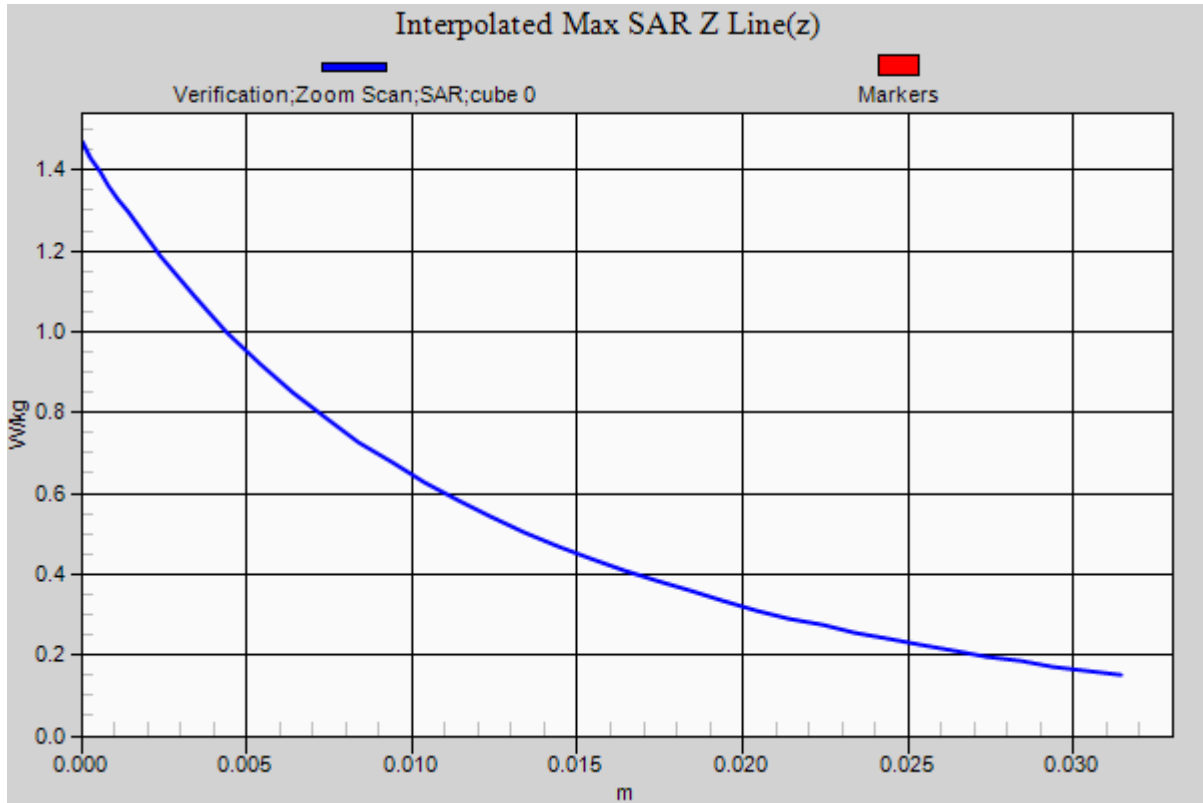

RF Exposure Lab

Plot 3

DUT: Dipole 1750 MHz D1750V2; Type: D1750V2; Serial: D1750V2 - SN: 1018

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1
Medium: MSL1750; Medium parameters used: $f = 1750$ MHz; $\sigma = 1.51$ S/m; $\epsilon_r = 52.81$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Test Date: Date: 7/8/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C


Probe: EX3DV4 - SN3662; ConvF(7.95, 7.95, 7.95); Calibrated: 4/24/2019;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/16/2019
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

1750 MHz/Verification/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 5.31 W/kg

1750 MHz/Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 30.756 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 6.82 W/kg
 $P_{in} = 100$ mW
SAR(1 g) = 3.67 W/kg; SAR(10 g) = 2.01 W/kg
Maximum value of SAR (measured) = 5.51 W/kg

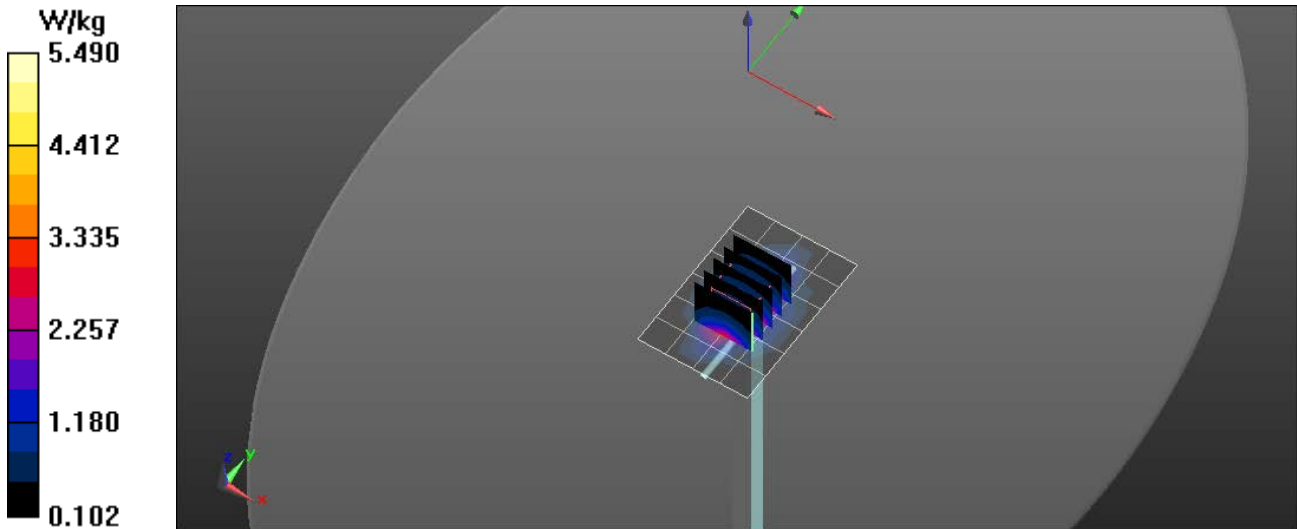

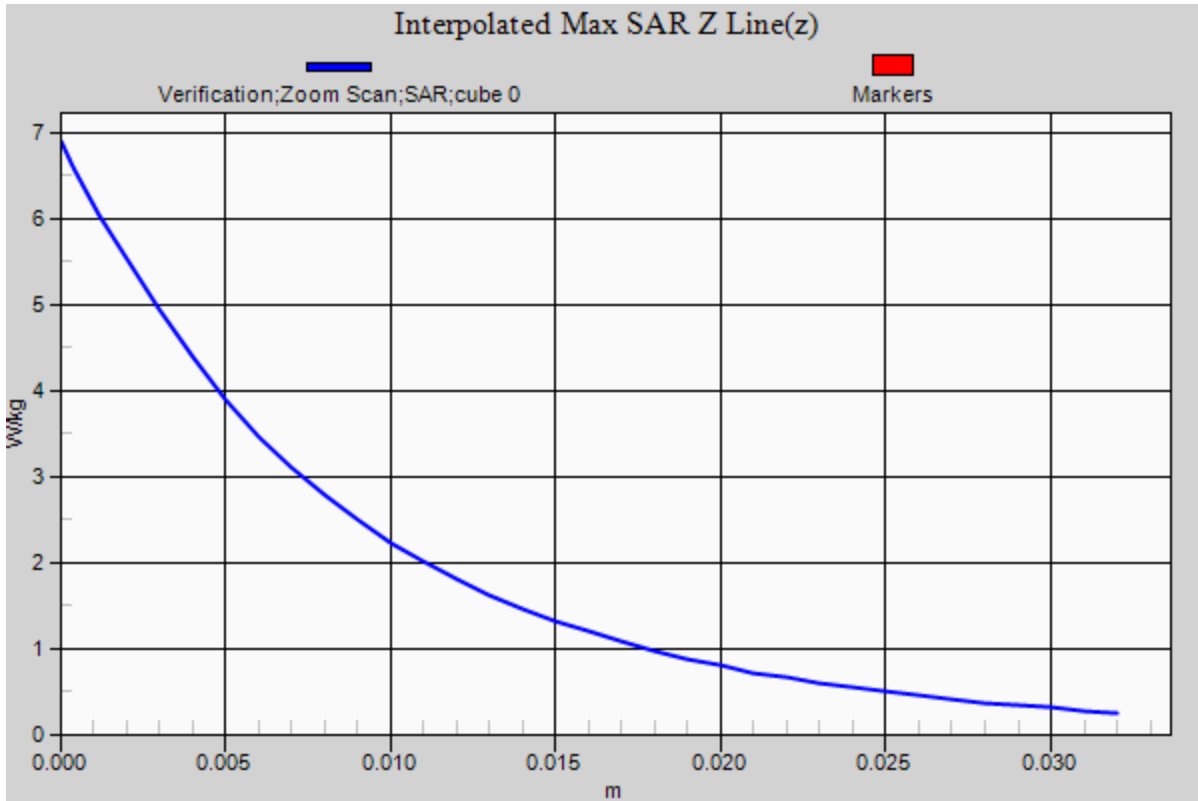

RF Exposure Lab

Plot 4

DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN: 5d1116


Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1
 Medium: MSL1900; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.55$ S/m; $\epsilon_r = 52.61$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section


Test Date: Date: 7/8/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C
 Probe: EX3DV4 - SN3662; ConvF(7.69, 7.69, 7.69); Calibrated: 4/24/2019;
 Sensor-Surface: 2mm (Mechanical Surface Detection)
 Electronics: DAE4 Sn1416; Calibrated: 4/16/2019
 Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
 Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

1900 MHz Body/Verification/Area Scan (61x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 5.52 W/kg

1900 MHz Body/Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 53.684 V/m; Power Drift = -0.01 dB
 Peak SAR (extrapolated) = 6.66 W/kg
 $P_{in} = 100$ mW
SAR(1 g) = 4.01 W/kg; SAR(10 g) = 1.94 W/kg
 Maximum value of SAR (measured) = 5.62 W/kg

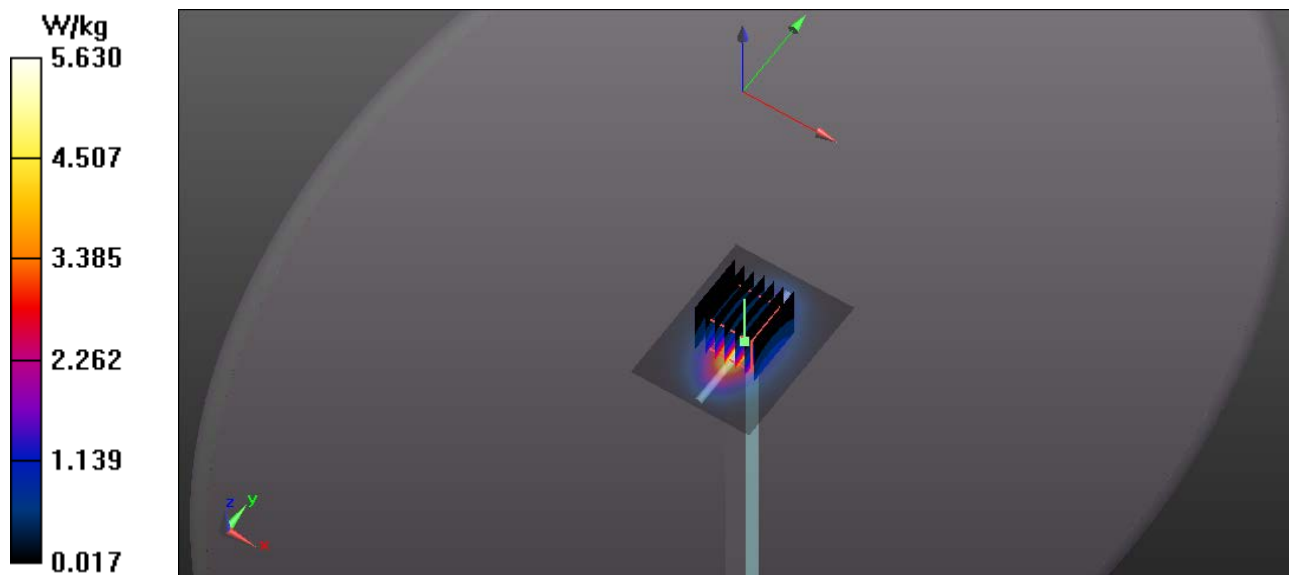

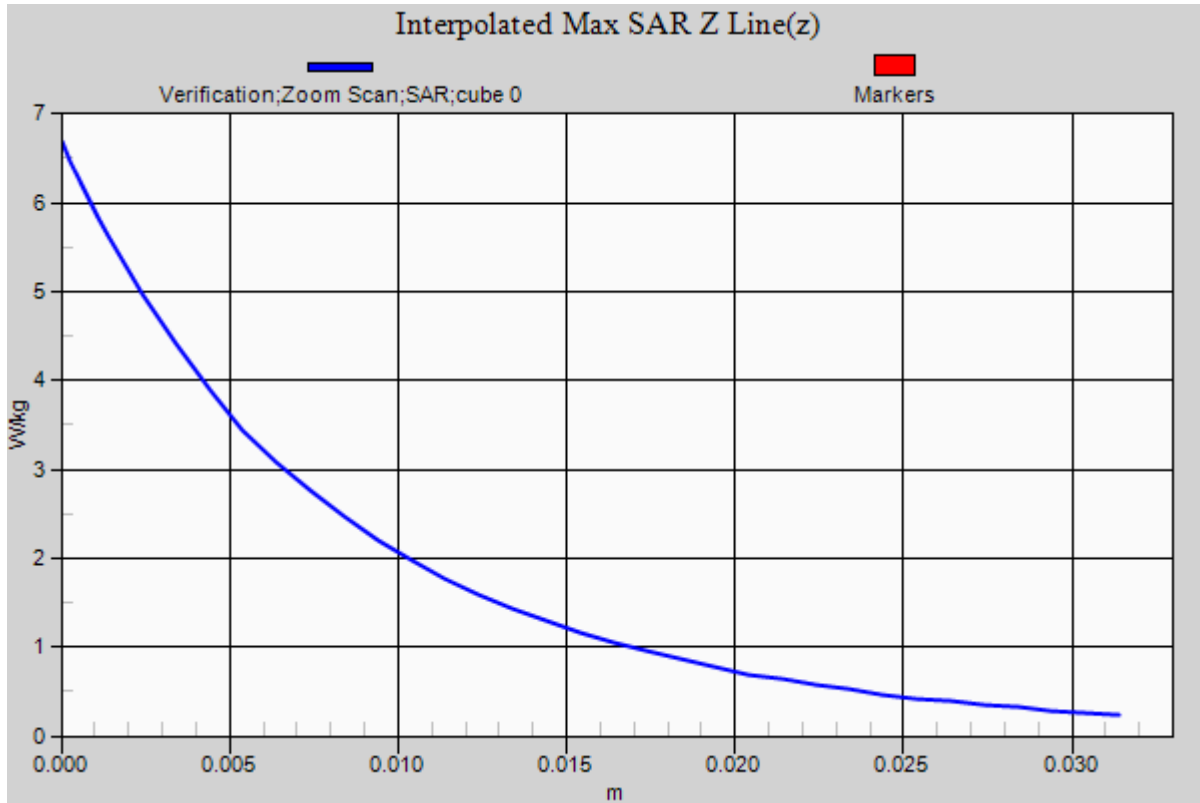

RF Exposure Lab

Plot 5

DUT: Dipole 2300 MHz D2300V2; Type: D2300V2; Serial: D2300V2 - SN: 1060


Communication System: CW; Frequency: 2300 MHz; Duty Cycle: 1:1
 Medium: MSL2300; Medium parameters used: $f = 2300$ MHz; $\sigma = 1.83$ S/m; $\epsilon_r = 52.26$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section


Test Date: Date: 7/2/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C
 Probe: EX3DV4 - SN3662; ConvF(7.43, 7.43, 7.43); Calibrated: 4/24/2019;
 Sensor-Surface: 2mm (Mechanical Surface Detection)
 Electronics: DAE4 Sn1416; Calibrated: 4/16/2019
 Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
 Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

Body Verification/2300 MHz/Area Scan (61x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
 Maximum value of SAR (interpolated) = 8.84 W/kg

Body Verification/2300 MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 52.697 V/m; Power Drift = -0.01 dB
 Peak SAR (extrapolated) = 11.05 W/kg
 $P_{in} = 100$ mW
SAR(1 g) = 4.75 W/kg; SAR(10 g) = 2.16 W/kg
 Maximum value of SAR (measured) = 8.95 W/kg

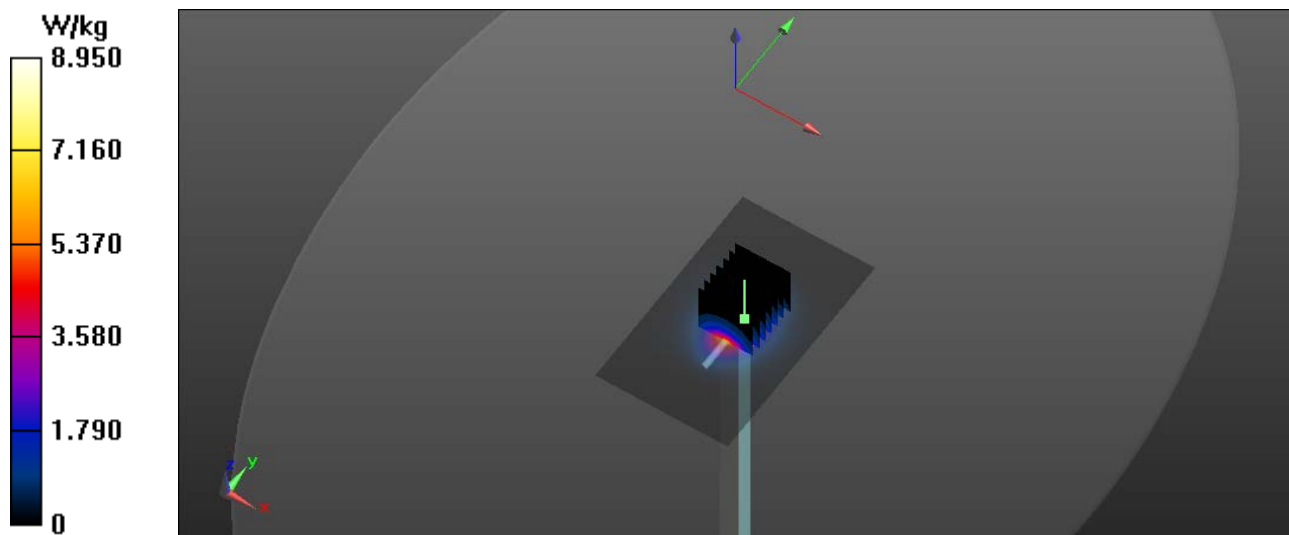

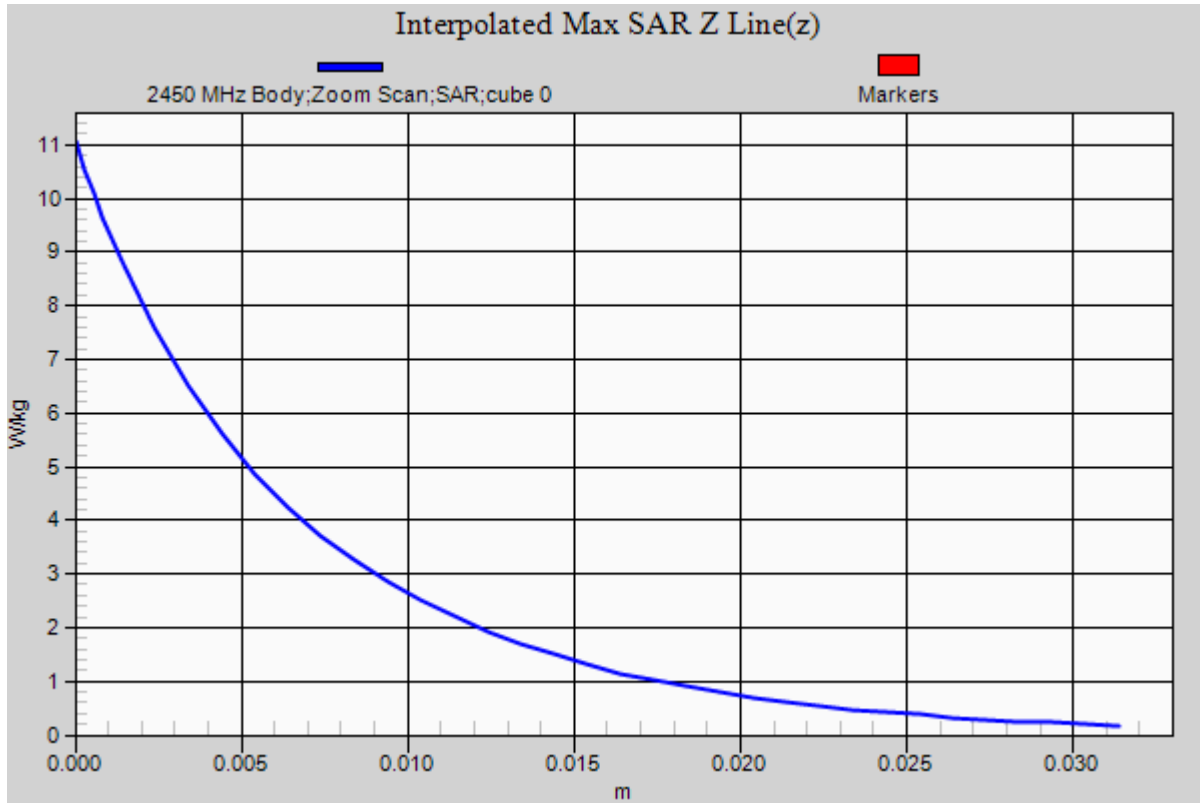

RF Exposure Lab

Plot 6

DUT: Dipole 2550 MHz D2550V2; Type: D2550V2; Serial: D2550V2 - SN: 1003


Communication System: CW; Frequency: 2550 MHz; Duty Cycle: 1:1
 Medium: MSL2600; Medium parameters used: $f = 2550$ MHz; $\sigma = 2.13$ S/m; $\epsilon_r = 51.73$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section


Test Date: Date: 7/2/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C
 Probe: EX3DV4 - SN3662; ConvF(7.12, 7.12, 7.12); Calibrated: 4/24/2019;
 Sensor-Surface: 2mm (Mechanical Surface Detection)
 Electronics: DAE4 Sn1416; Calibrated: 4/16/2019
 Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
 Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

2550 MHz Body/Verification/Area Scan (61x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 9.09 W/kg

2550 MHz Body/Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 51.287 V/m; Power Drift = -0.03 dB
 Peak SAR (extrapolated) = 11.42 W/kg
 $P_{in} = 100$ mW
SAR(1 g) = 5.35 W/kg; SAR(10 g) = 2.38 W/kg
 Maximum value of SAR (measured) = 9.17 W/kg

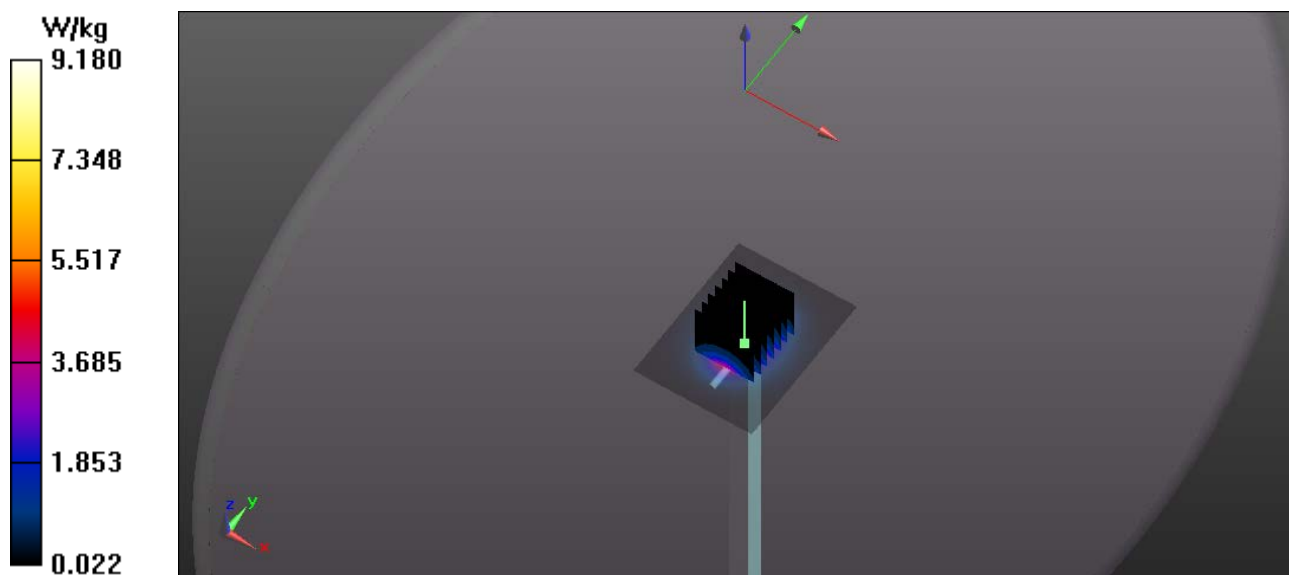

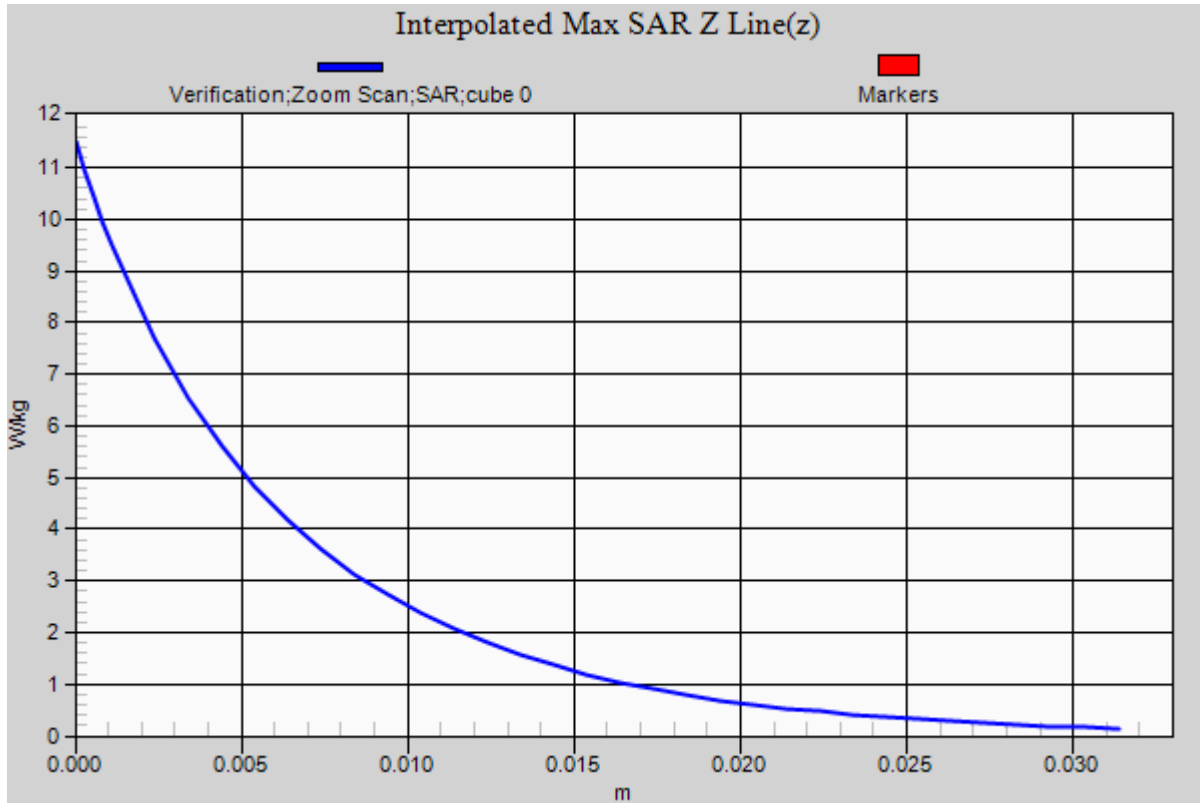

RF Exposure Lab

Plot 7

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN: 829


Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1
 Medium: MSL2450; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.92$ S/m; $\epsilon_r = 52.77$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section


Test Date: Date: 7/2/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C
 Probe: EX3DV4 – SN7530; ConvF(7.79, 7.79, 7.79); Calibrated: 4/3/2019;
 Sensor-Surface: 2mm (Mechanical Surface Detection)
 Electronics: DAE4 Sn1321; Calibrated: 1/10/2019
 Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251
 Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

Body Verification/2450 MHz/Area Scan (61x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
 Maximum value of SAR (interpolated) = 8.92 W/kg

Body Verification/2450 MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 53.359 V/m; Power Drift = -0.02 dB
 Peak SAR (extrapolated) = 11.04 W/kg
SAR(1 g) = 5.22 W/kg; SAR(10 g) = 2.47 W/kg
 Maximum value of SAR (measured) = 8.79 W/kg

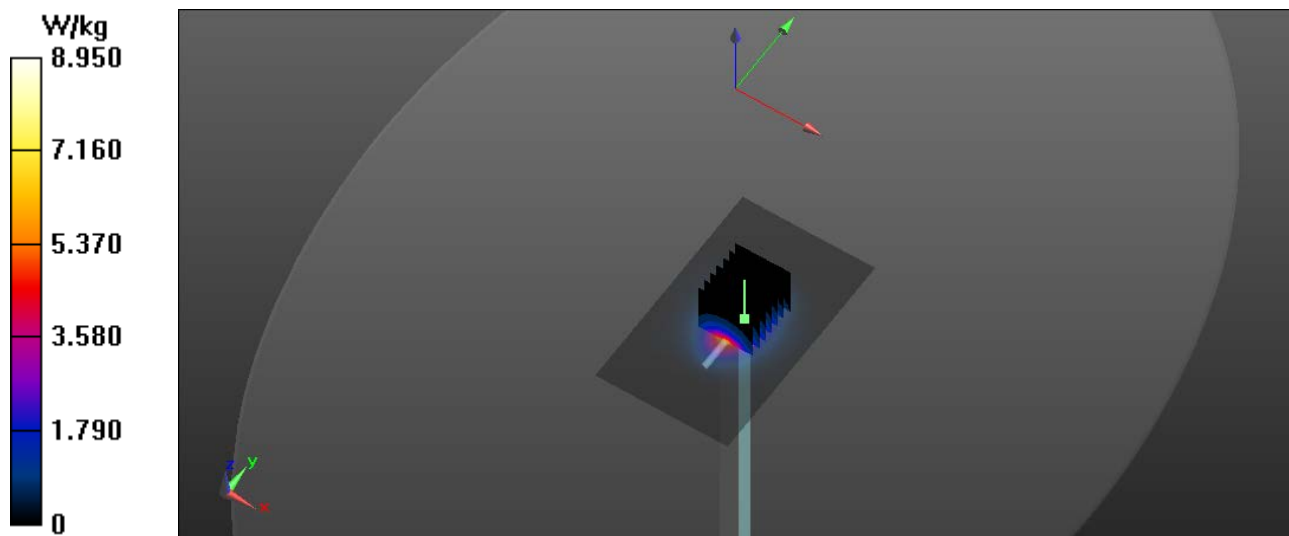

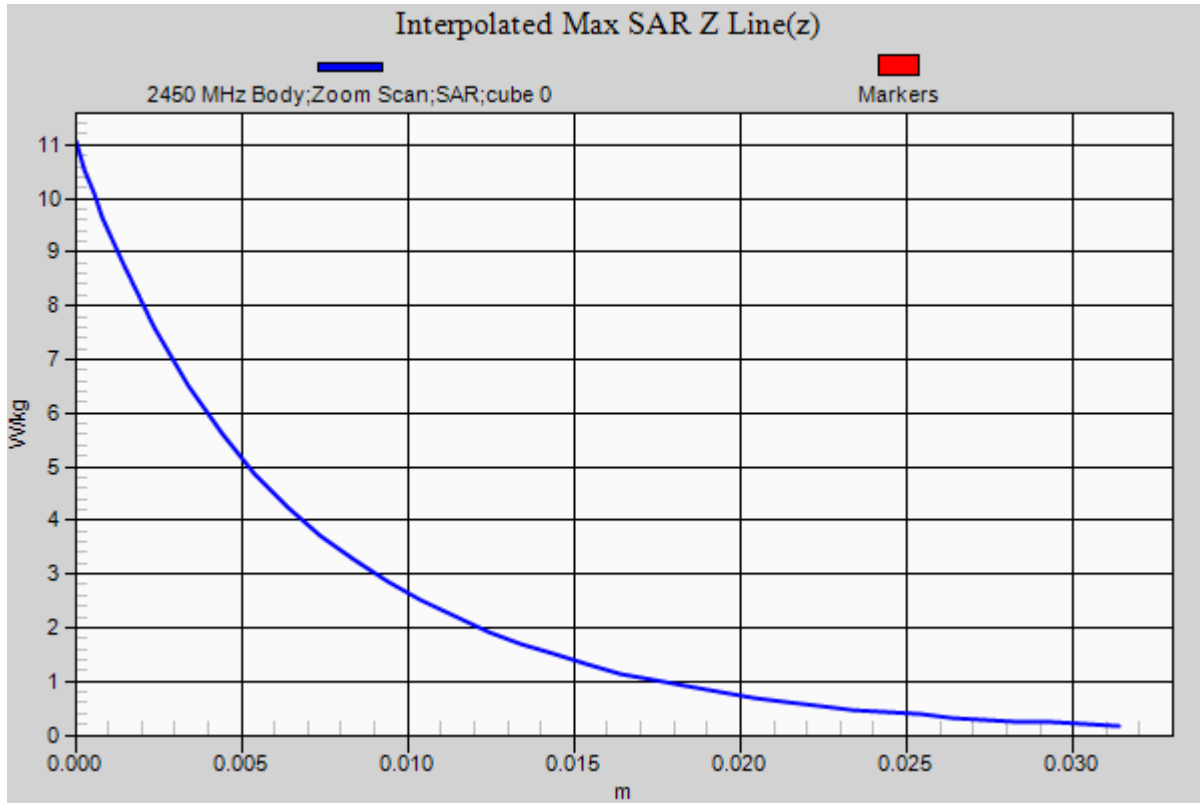

RF Exposure Lab

Plot 8

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1085

Communication System: CW; Frequency: 5250 MHz; Duty Cycle: 1:1
 Medium: MSL 3-6 GHz; Medium parameters used (interpolated): $f = 5250$ MHz; $\sigma = 5.265$ S/m; $\epsilon_r = 48.995$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Test Date: Date: 7/1/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C
 Probe: EX3DV4 – SN7530; ConvF(4.68, 4.68, 4.68); Calibrated: 4/3/2019;
 Sensor-Surface: 2mm (Mechanical Surface Detection)
 Electronics: DAE4 Sn1321; Calibrated: 1/10/2019
 Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251
 Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

5250 MHz Body/Verification/Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.58 W/kg

5250 MHz Body/Verification/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 11.705 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 3.75 W/kg

SAR(1 g) = 0.783 W/kg; SAR(10 g) = 0.216 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.65 W/kg

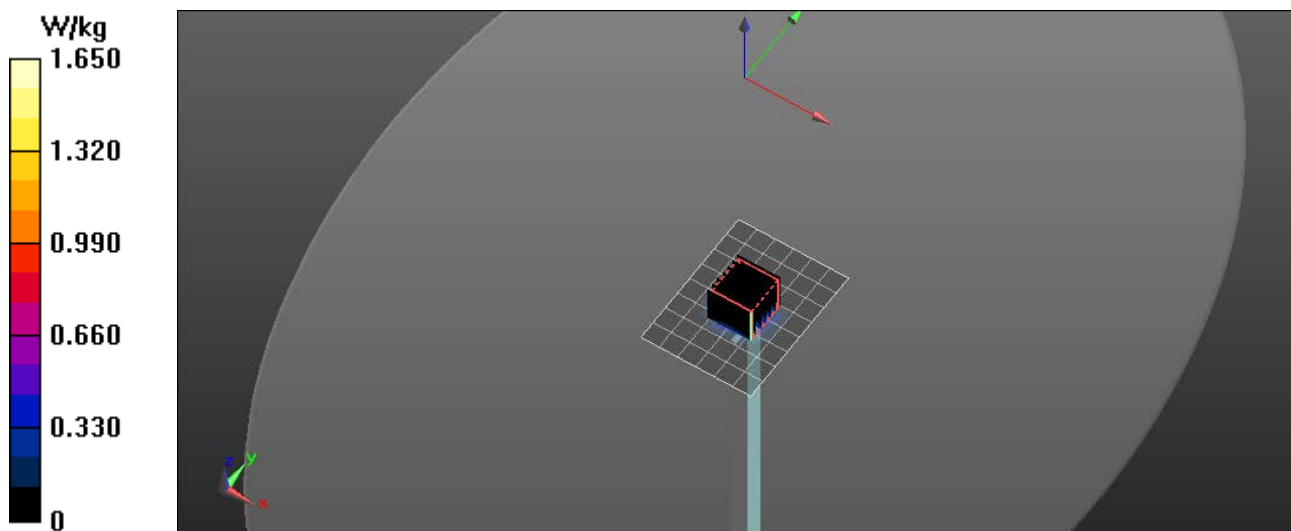

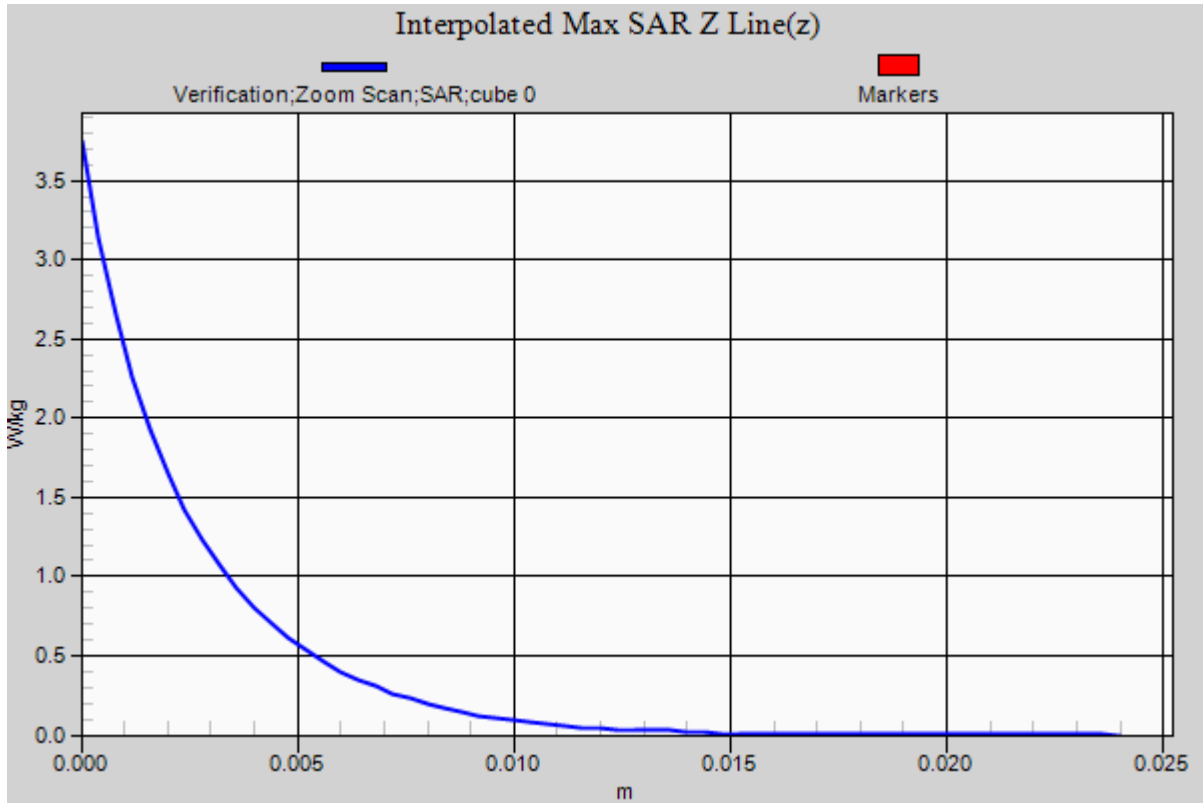

RF Exposure Lab

Plot 9

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1085


Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1
 Medium: MSL 3-6 GHz; Medium parameters used: $f = 5600$ MHz; $\sigma = 5.73$ S/m; $\epsilon_r = 48.47$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section


Test Date: Date: 7/1/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C
 Probe: EX3DV4 – SN7530; ConvF(4.29, 4.29, 4.29); Calibrated: 4/3/2019;
 Sensor-Surface: 2mm (Mechanical Surface Detection)
 Electronics: DAE4 Sn1321; Calibrated: 1/10/2019
 Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251
 Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

5600 MHz Body/Verification/Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 1.64 W/kg

5600 MHz Body/Verification/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
 Reference Value = 11.892 V/m; Power Drift = 0.01 dB
 Peak SAR (extrapolated) = 3.63 W/kg
SAR(1 g) = 0.813 W/kg; SAR(10 g) = 0.226 W/kg
 Maximum value of SAR (measured) = 1.70 W/kg

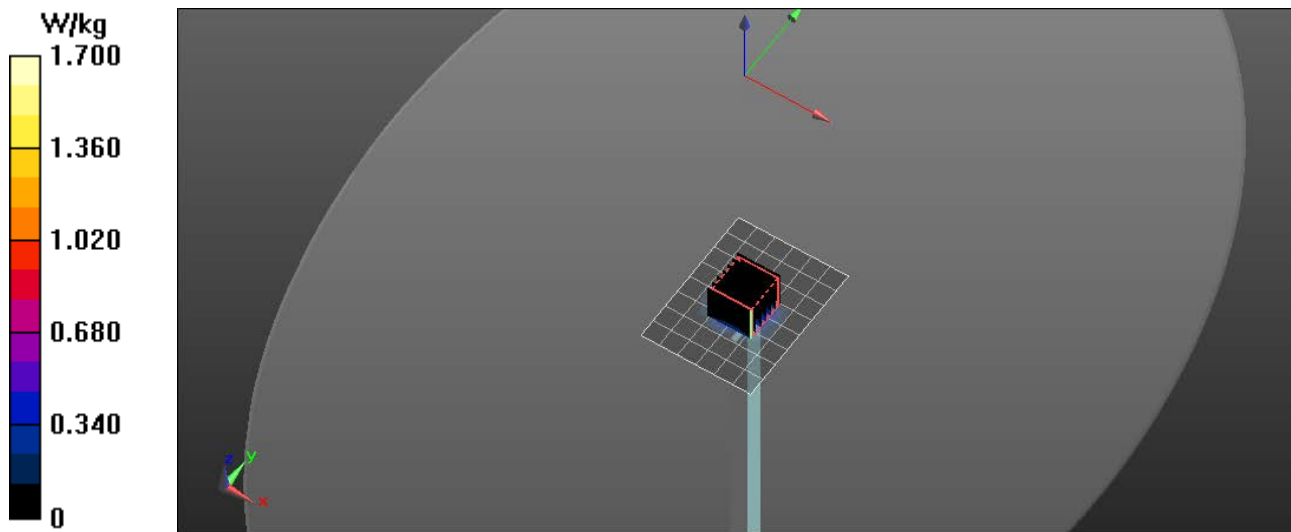

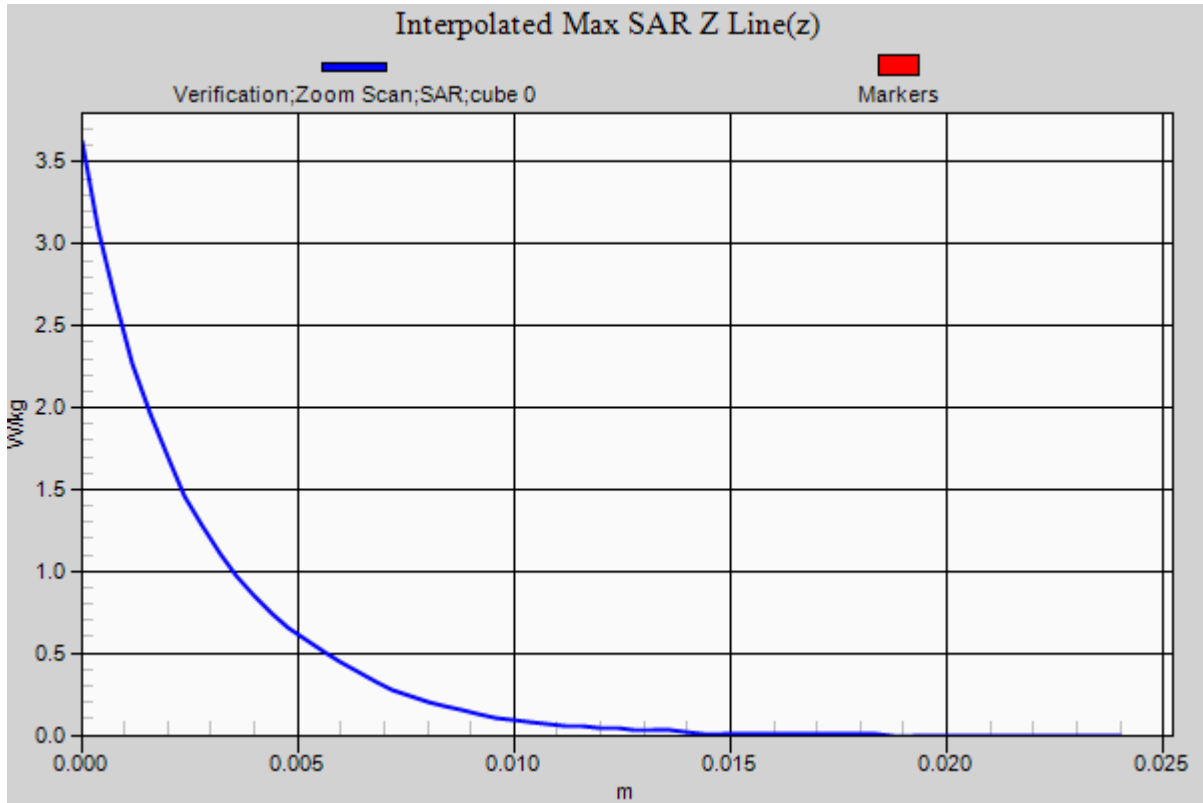

RF Exposure Lab

Plot 10

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1085

Communication System: CW; Frequency: 5750 MHz; Duty Cycle: 1:1
 Medium: MSL 3-6 GHz; Medium parameters used (interpolated): $f = 5750$ MHz; $\sigma = 5.925$ S/m; $\epsilon_r = 48.245$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Test Date: Date: 7/1/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C
 Probe: EX3DV4 – SN7530; ConvF(4.35, 4.35, 4.35); Calibrated: 4/3/2019;
 Sensor-Surface: 2mm (Mechanical Surface Detection)
 Electronics: DAE4 Sn1321; Calibrated: 1/10/2019
 Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251
 Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

5750 MHz Body/Verification/Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.56 W/kg

5750 MHz Body/Verification/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 11.621 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 3.47 W/kg

SAR(1 g) = 0.779 W/kg; SAR(10 g) = 0.218 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.63 W/kg

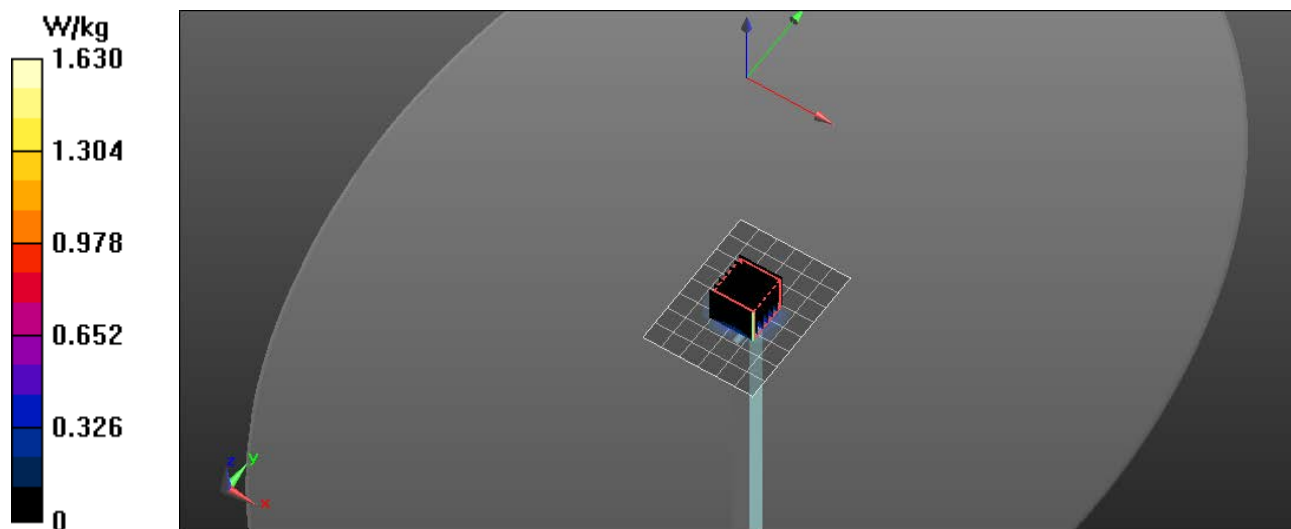

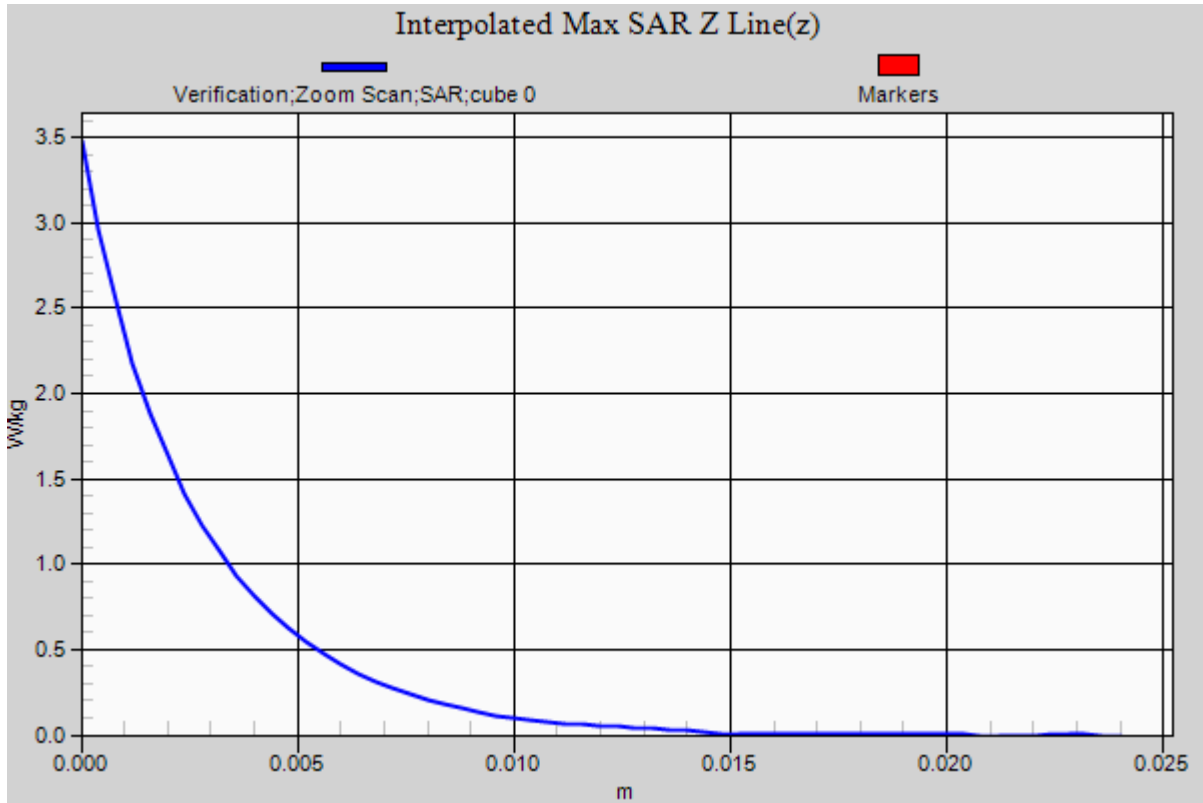

Appendix B – SAR Test Data Plots

RF Exposure Lab

Plot 1

DUT: TPN-Q225; Type: Tablet PC; Serial: Eng 1

Communication System: LTE (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 704 MHz; Duty Cycle: 1:1
Medium: MSL750; Medium parameters used (interpolated): $f = 704$ MHz; $\sigma = 0.964$ S/m; $\epsilon_r = 55.068$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 7/1/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(9.57, 9.57, 9.57); Calibrated: 4/24/2019;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/16/2019
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

750 MHz B12 LTE/Back Low 1 RB 0 Offset/Area Scan (9x5x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.35 W/kg

750 MHz B12 LTE/Back Low 1 RB 0 Offset/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.52 W/kg

SAR(1 g) = 1.17 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.81 W/kg

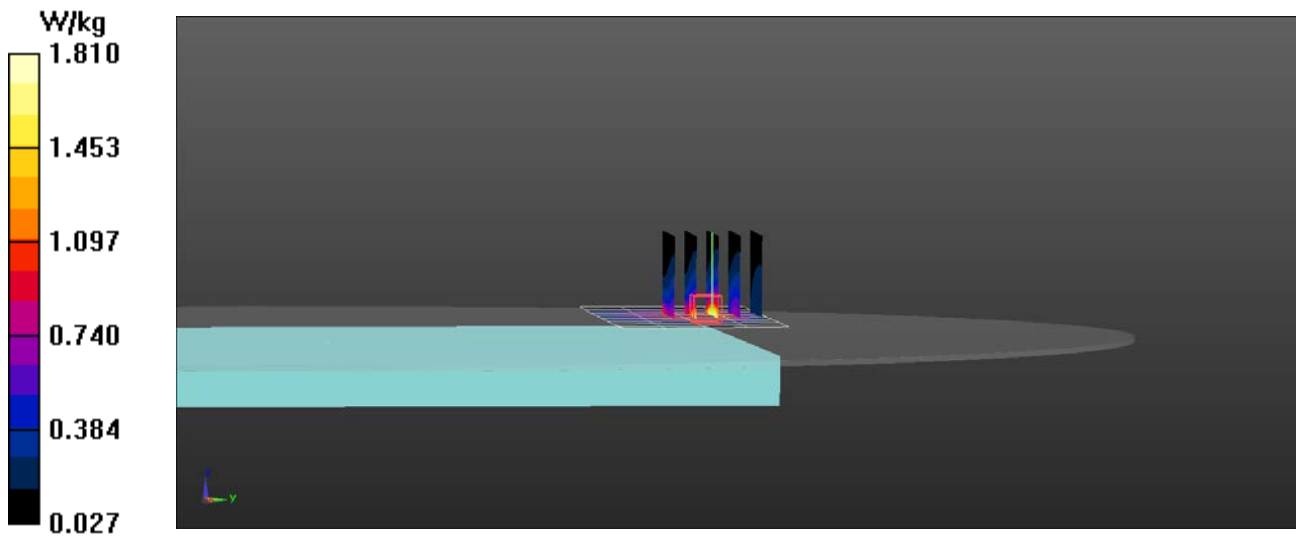

RF Exposure Lab

Plot 2

DUT: TPN-Q225; Type: Tablet PC; Serial: Eng 1

Communication System: LTE (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 782 MHz; Duty Cycle: 1:1
Medium: MSL750; Medium parameters used (interpolated): $f = 782 \text{ MHz}$; $\sigma = 0.99 \text{ S/m}$; $\epsilon_r = 54.812$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

Test Date: Date: 7/1/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(9.57, 9.57, 9.57); Calibrated: 4/24/2019;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/16/2019
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

750 MHz B13 LTE/Back Mid 1 RB 0 Offset/Area Scan (9x5x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.87 W/kg

750 MHz B13 LTE/Back Mid 1 RB 0 Offset/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.43 W/kg

SAR(1 g) = 1.18 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.79 W/kg

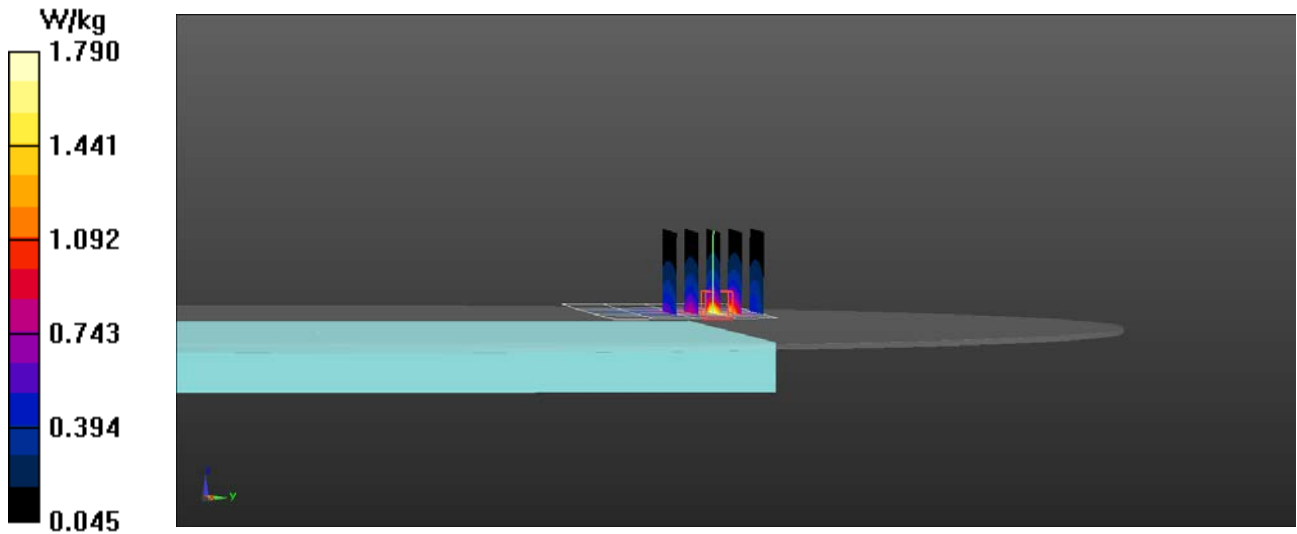

RF Exposure Lab

Plot 3

DUT: TPN-Q225; Type: Tablet PC; Serial: Eng 1

Communication System: LTE (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 793 MHz; Duty Cycle: 1:1
Medium: MSL750; Medium parameters used (interpolated): $f = 793$ MHz; $\sigma = 0.993$ S/m; $\epsilon_r = 54.768$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 7/1/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(9.57, 9.57, 9.57); Calibrated: 4/24/2019;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/16/2019
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

750 MHz B14 LTE/Back Mid 1 RB 0 Offset/Area Scan (9x5x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.82 W/kg

750 MHz B14 LTE/Back Mid 1 RB 0 Offset/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.38 W/kg

SAR(1 g) = 1.16 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.75 W/kg

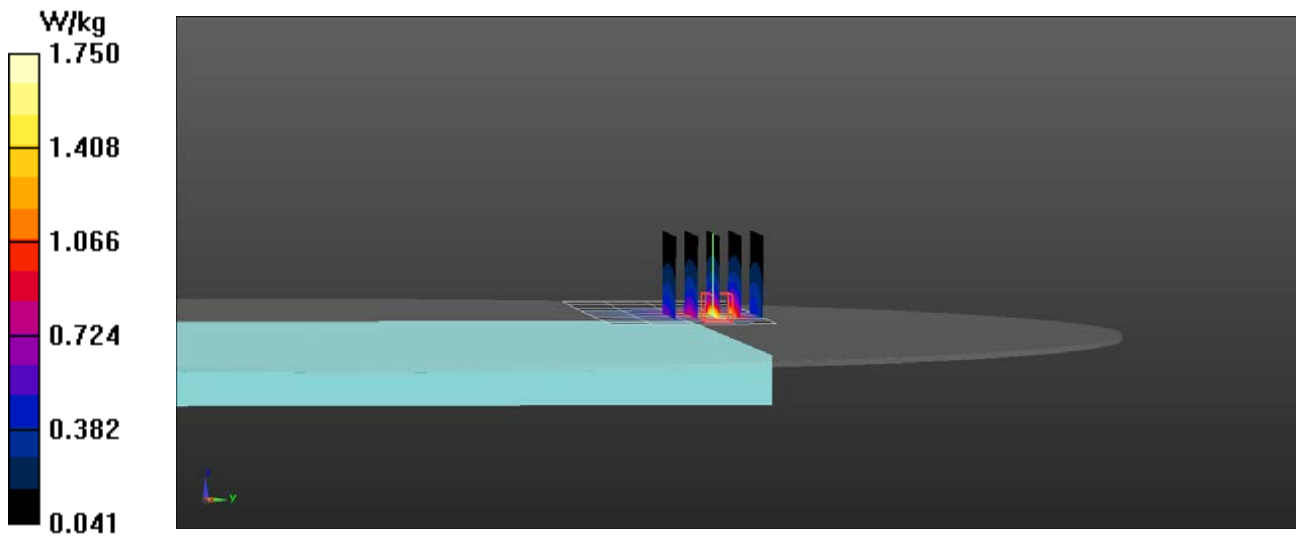

RF Exposure Lab

Plot 4

DUT: TPN-Q225; Type: Tablet PC; Serial: Eng 1

Communication System: UMTS (WCDMA); Frequency: 826.4 MHz; Duty Cycle: 1:1
Medium: MSL835; Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 1.001$ S/m; $\epsilon_r = 55.024$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 7/9/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(9.34, 9.34, 9.34); Calibrated: 4/24/2019;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/16/2019
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

835 MHz WCDMA/Back Low/Area Scan (9x5x1): Measurement grid: dx=15mm, dy=15mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.941 W/kg

835 MHz WCDMA/Back Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.55 W/kg

SAR(1 g) = 1.08 W/kg

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.81 W/kg

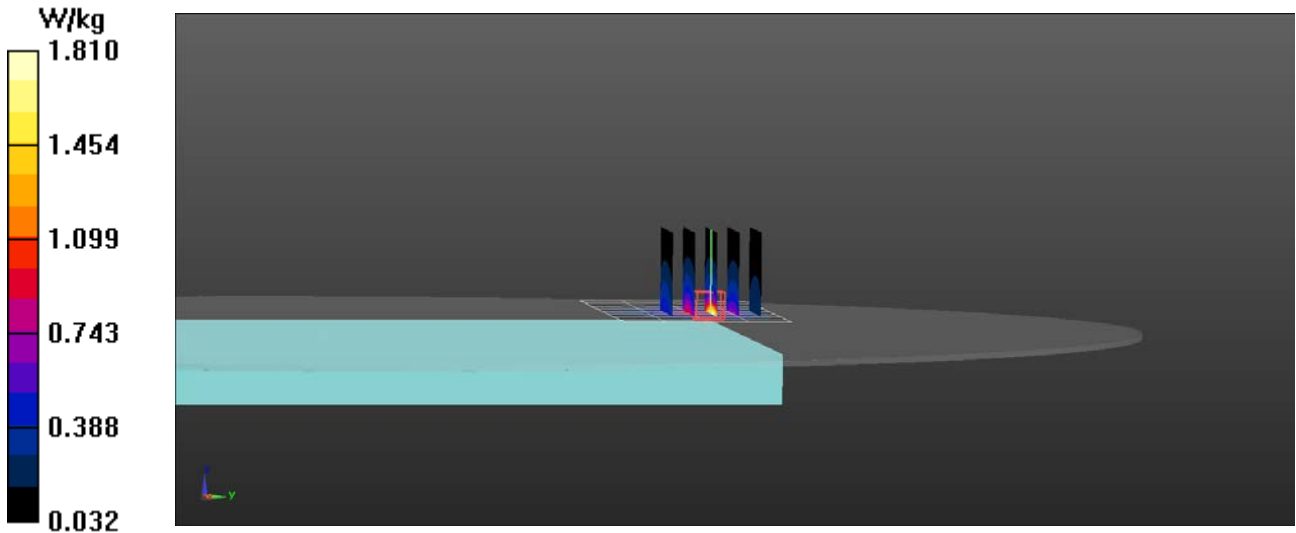

RF Exposure Lab

Plot 5

DUT: TPN-Q225; Type: Tablet PC; Serial: Eng 1

Communication System: LTE (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 819 MHz; Duty Cycle: 1:1
Medium: MSL835; Medium parameters used (interpolated): $f = 819$ MHz; $\sigma = 1$ S/m; $\epsilon_r = 55.06$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 7/9/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(9.34, 9.34, 9.34); Calibrated: 4/24/2019;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/16/2019
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

835 MHz B26 LTE/Back Low 1 RB 0 Offset/Area Scan (9x5x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.04 W/kg

835 MHz B26 LTE/Back Low 1 RB 0 Offset/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.49 W/kg

SAR(1 g) = 1.08 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.79 W/kg

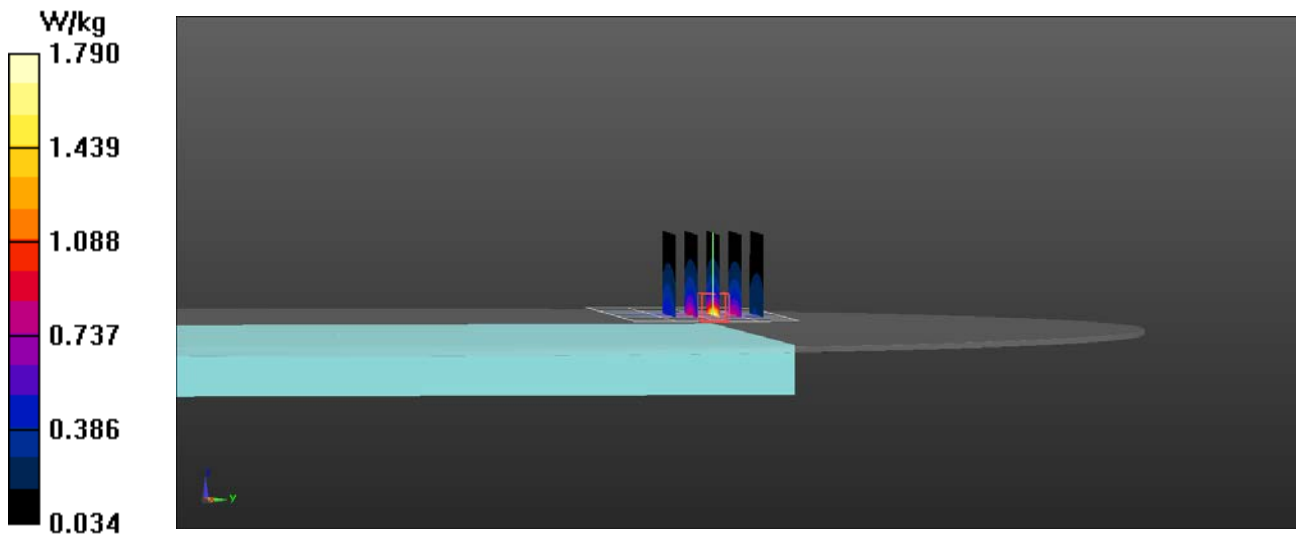

RF Exposure Lab

Plot 6

DUT: TPN-Q225; Type: Tablet PC; Serial: Eng 1

Communication System: UMTS (WCDMA); Frequency: 1752.6 MHz; Duty Cycle: 1:1
Medium: MSL1750; Medium parameters used (interpolated): $f = 1752.6$ MHz; $\sigma = 1.513$ S/m; $\epsilon_r = 52.805$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 7/8/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(7.95, 7.95, 7.95); Calibrated: 4/24/2019;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/16/2019
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

1750 MHz WCDMA/Laptop High/Area Scan (9x5x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.45 W/kg

1750 MHz WCDMA/Laptop High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.94 W/kg

SAR(1 g) = 1 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.54 W/kg

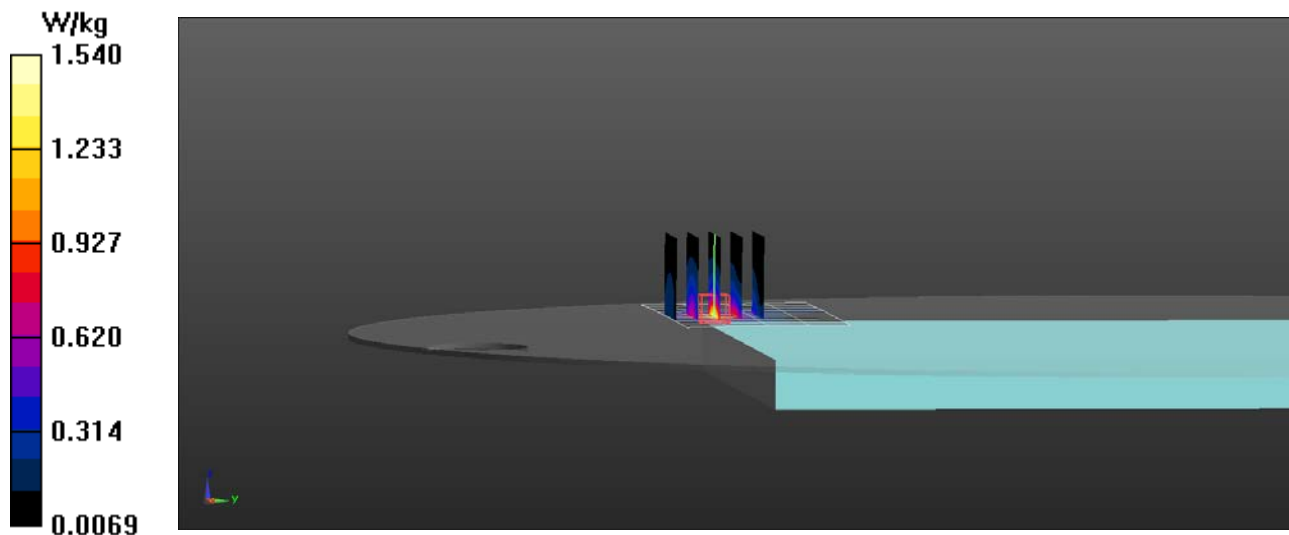

RF Exposure Lab

Plot 7

DUT: TPN-Q225; Type: Tablet PC; Serial: Eng 1

Communication System: LTE (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1770 MHz; Duty Cycle: 1:1
 Medium: MSL1750; Medium parameters used (interpolated): $f = 1770$ MHz; $\sigma = 1.53$ S/m; $\epsilon_r = 52.76$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Test Date: Date: 7/8/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(7.95, 7.95, 7.95); Calibrated: 4/24/2019;
 Sensor-Surface: 2mm (Mechanical Surface Detection)
 Electronics: DAE4 Sn1416; Calibrated: 4/16/2019
 Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
 Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

1750 MHz B66 LTE/Back High 1 RB 49 Offset/Area Scan (9x5x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.43 W/kg

1750 MHz B66 LTE/Back High 1 RB 49 Offset/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.66 W/kg

SAR(1 g) = 1.10 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.81 W/kg

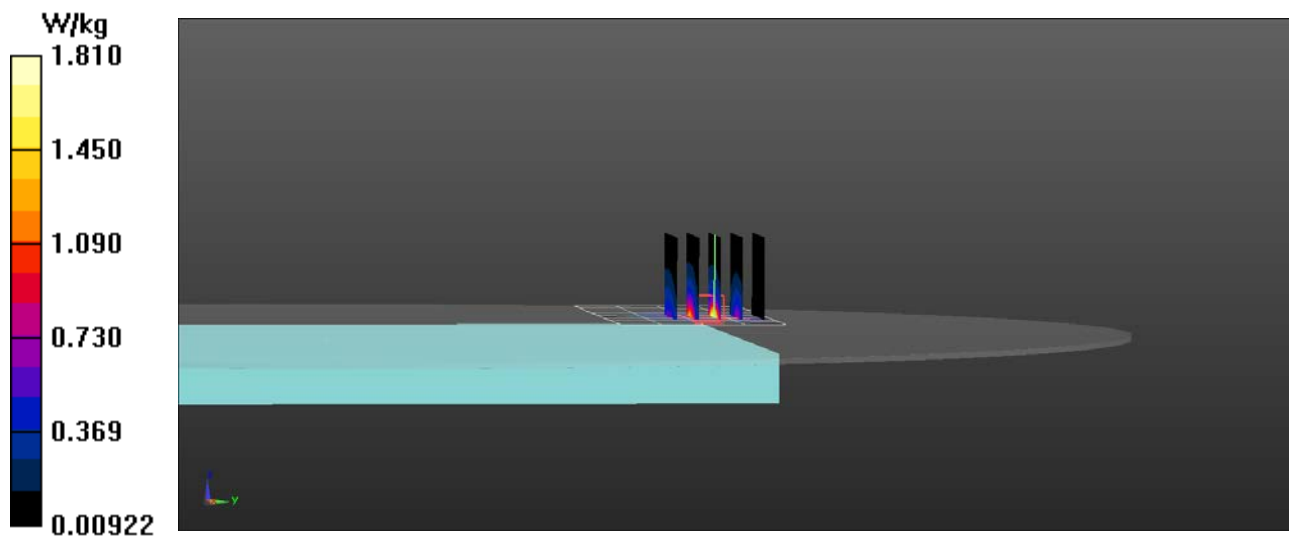

RF Exposure Lab

Plot 8

DUT: TPN-Q225; Type: Tablet PC; Serial: Eng 1

Communication System: UMTS (WCDMA); Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium: MSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.55$ S/m; $\epsilon_r = 52.66$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section


Test Date: Date: 7/8/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(7.69, 7.69, 7.69); Calibrated: 4/24/2019;
 Sensor-Surface: 2mm (Mechanical Surface Detection)
 Electronics: DAE4 Sn1416; Calibrated: 4/16/2019
 Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
 Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

1900 MHz WCDMA/Laptop Mid/Area Scan (9x5x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 1.79 W/kg

1900 MHz WCDMA/Laptop Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 0.2810 V/m; Power Drift = -0.02 dB
 Peak SAR (extrapolated) = 2.31 W/kg
SAR(1 g) = 1.15 W/kg
 Maximum value of SAR (measured) = 1.65 W/kg

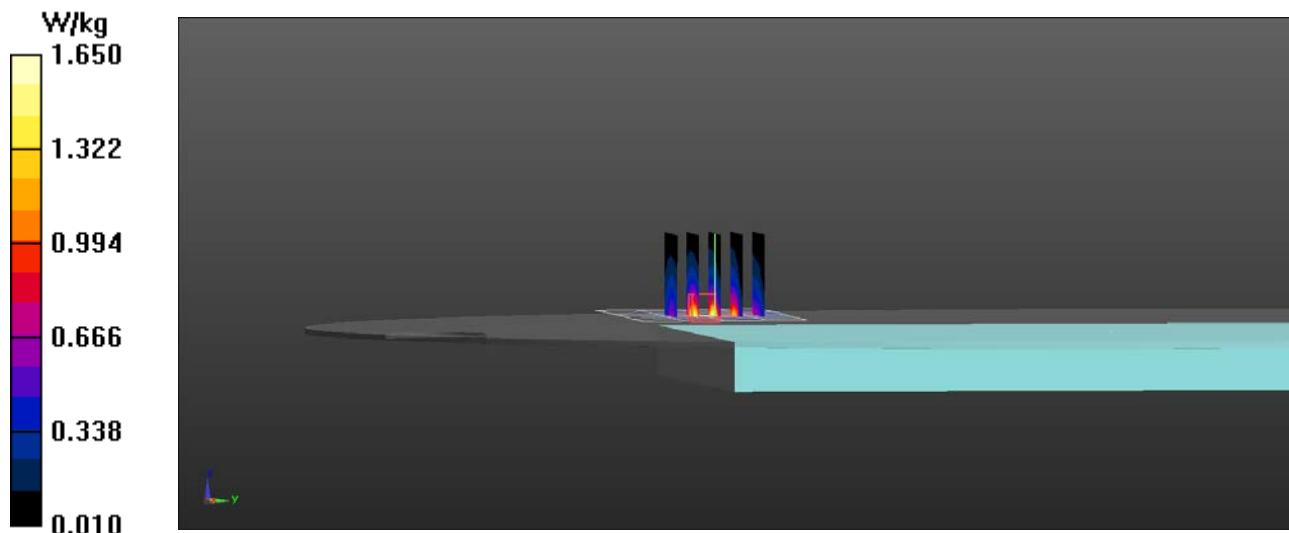

RF Exposure Lab

Plot 9

DUT: TPN-Q225; Type: Tablet PC; Serial: Eng 1

Communication System: LTE (SC-FDMA, 50% RB, 20 MHz, QPSK); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium: MSL1900; Medium parameters used (interpolated): $f = 1882.5$ MHz; $\sigma = 1.55$ S/m; $\epsilon_r = 52.653$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 7/9/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(7.69, 7.69, 7.69); Calibrated: 4/24/2019;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/16/2019
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

1900 MHz B25 LTE/Laptop Mid 50 RB 24 Offset/Area Scan (9x5x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.60 W/kg

1900 MHz B25 LTE/Laptop Mid 50 RB 24 Offset/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.40 W/kg

SAR(1 g) = 1.29 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.72 W/kg

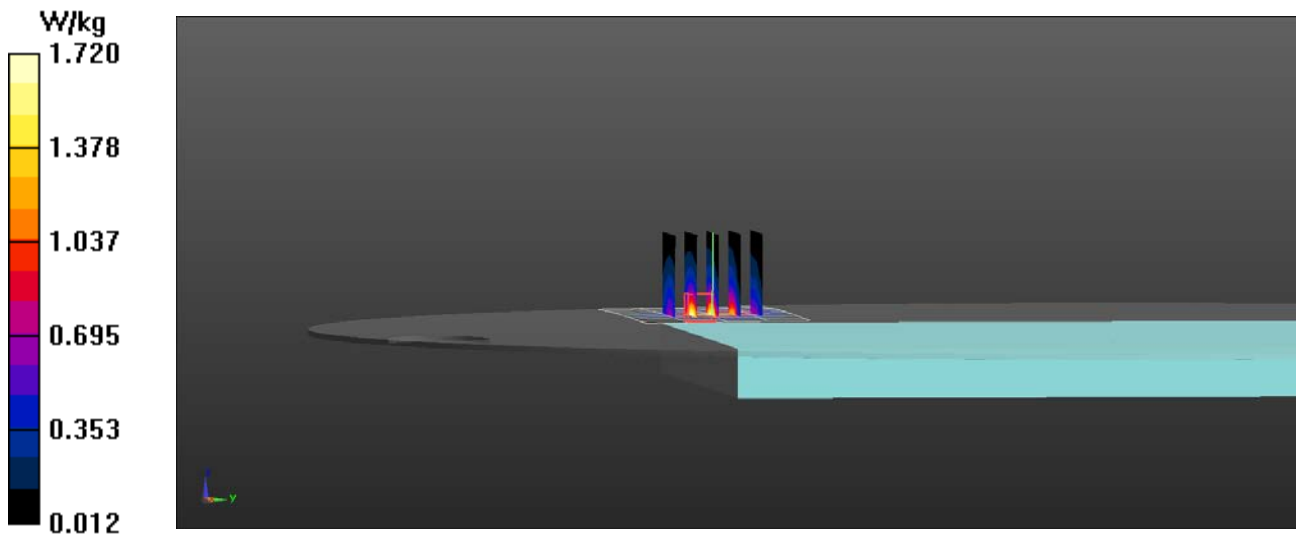

RF Exposure Lab

Plot 10

DUT: TPN-Q225; Type: Tablet PC; Serial: Eng 1

Communication System: LTE (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 2310 MHz; Duty Cycle: 1:1
Medium: MSL2300; Medium parameters used: $f = 2310$ MHz; $\sigma = 1.84$ S/m; $\epsilon_r = 52.24$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Test Date: Date: 7/2/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(7.43, 7.43, 7.43); Calibrated: 4/24/2019;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/16/2019
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

2300 MHz B30 LTE/Laptop Mid 1 RB 24 Offset/Area Scan (11x6x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.56 W/kg

2300 MHz B30 LTE/Laptop Mid 1 RB 24 Offset/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 2.22 W/kg
SAR(1 g) = 1.09 W/kg
Maximum value of SAR (measured) = 1.69 W/kg

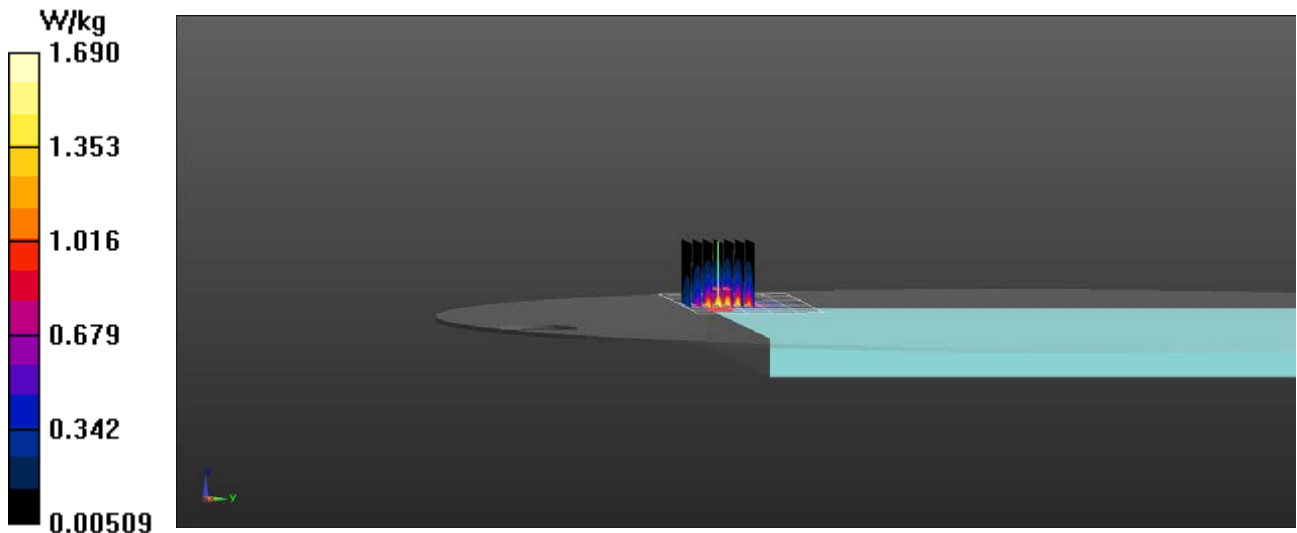

RF Exposure Lab

Plot 11

DUT: TPN-Q225; Type: Tablet PC; Serial: Eng 1

Communication System: LTE (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2510 MHz; Duty Cycle: 1:1
Medium: MSL2550; Medium parameters used: $f = 2510$ MHz; $\sigma = 2.06$ S/m; $\epsilon_r = 51.81$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Test Date: Date: 7/2/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(7.12, 7.12, 7.12); Calibrated: 4/24/2019;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/16/2019
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

2600 MHz B7 LTE/Laptop Low 1 RB 49 Offset/Area Scan (11x6x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.56 W/kg

2600 MHz B7 LTE/Laptop Low 1 RB 49 Offset/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 2.40 W/kg
SAR(1 g) = 1.18 W/kg
Maximum value of SAR (measured) = 1.77 W/kg

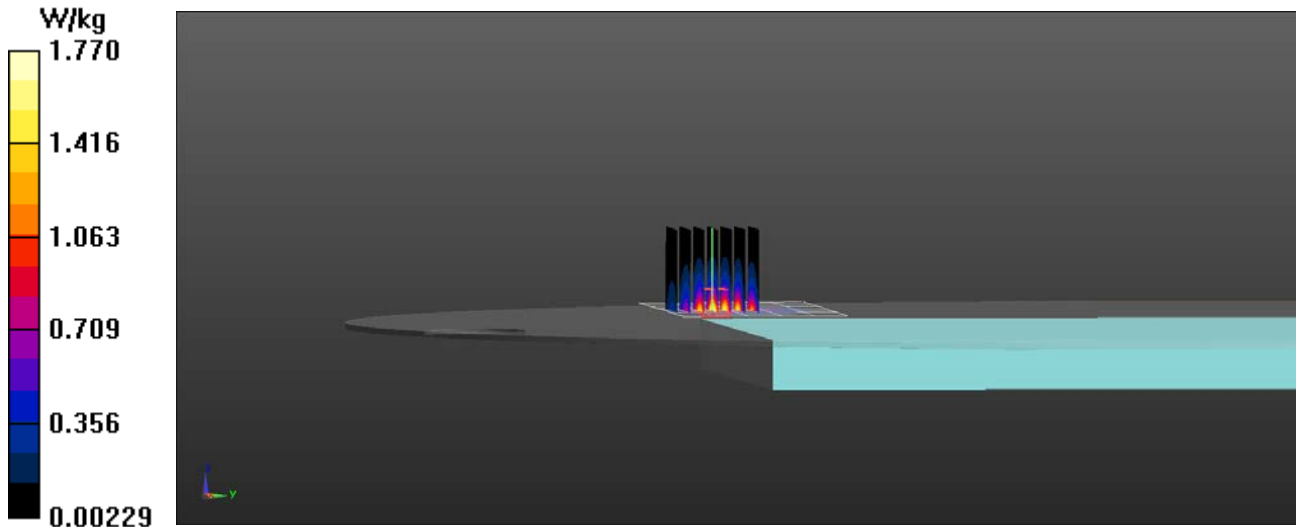

RF Exposure Lab

Plot 12

DUT: TPN-Q225; Type: Tablet PC; Serial: Eng 1

Communication System: LTE (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2593 MHz; Duty Cycle: 1:1
Medium: MSL2550; Medium parameters used (extrapolated): $f = 2593$ MHz; $\sigma = 2.186$ S/m; $\epsilon_r = 51.647$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 7/3/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(7.12, 7.12, 7.12); Calibrated: 4/24/2019;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/16/2019
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

2500 MHz B41 LTE/Back Mid 1 RB 49 Offset/Area Scan (11x6x1): Measurement grid: dx=12mm, dy=12mm

[Info: Extrapolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.32 W/kg

2500 MHz B41 LTE/Back Mid 1 RB 49 Offset/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.65 W/kg

SAR(1 g) = 0.847 W/kg

[Info: Extrapolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.42 W/kg

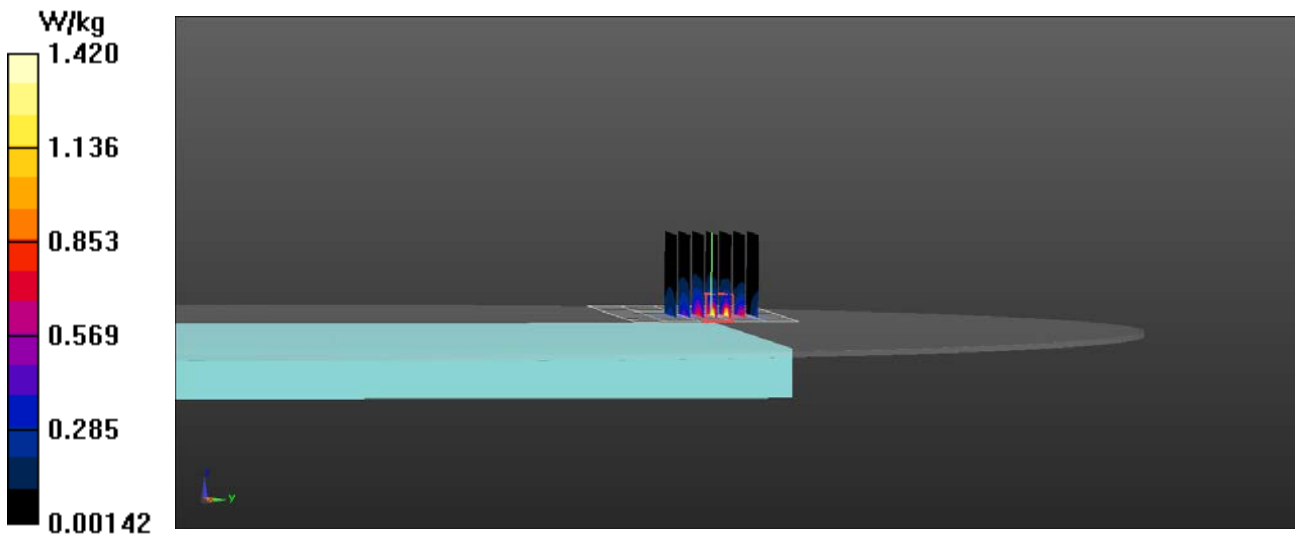

RF Exposure Lab

Plot 13

DUT: TPN-Q225; Type: Tablet PC; Serial: Eng 1

Communication System: WiFi 802.11b (DSSS, 1 Mbps); Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: MSL2450; Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.907$ S/m; $\epsilon_r = 52.796$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 7/2/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN7530; ConvF(7.79, 7.79, 7.79); Calibrated: 4/3/2019;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1321; Calibrated: 1/10/2019
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

2450 MHz Inpaq/Tablet Bottom Tx2 Mid/Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.78 W/kg

2450 MHz Inpaq/Tablet Bottom Tx2 Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 12.40 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.64 W/kg

SAR(1 g) = 1.04 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.81 W/kg

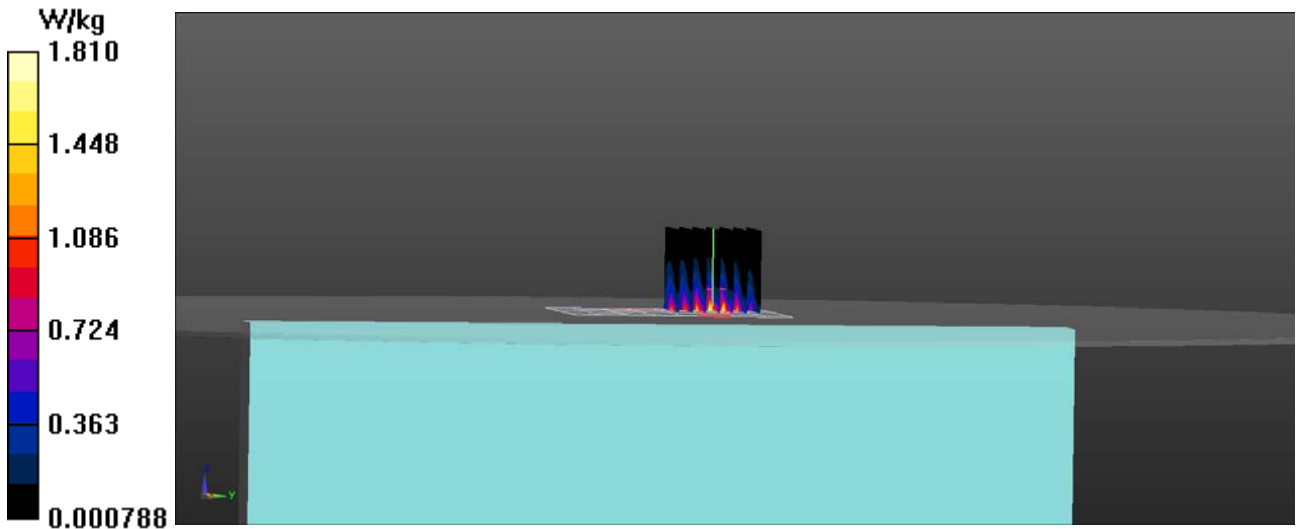

RF Exposure Lab

Plot 14

DUT: TPN-Q225; Type: Tablet PC; Serial: Eng 1

Communication System: WiFi 802.11a (OFDM, 6 Mbps); Frequency: 5300 MHz; Duty Cycle: 1:1
Medium: MSL 3-6 GHz; Medium parameters used: $f = 5300$ MHz; $\sigma = 5.33$ S/m; $\epsilon_r = 48.92$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Test Date: Date: 7/1/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN7530; ConvF(4.68, 4.68, 4.68); Calibrated: 4/3/2019;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1321; Calibrated: 1/10/2019
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

5200 MHz Inpaq/Tablet Bottom Tx1 60/Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.52 W/kg

5200 MHz Inpaq/Tablet Bottom Tx1 60/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0.8590 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 3.96 W/kg
SAR(1 g) = 0.813 W/kg
Maximum value of SAR (measured) = 1.68 W/kg

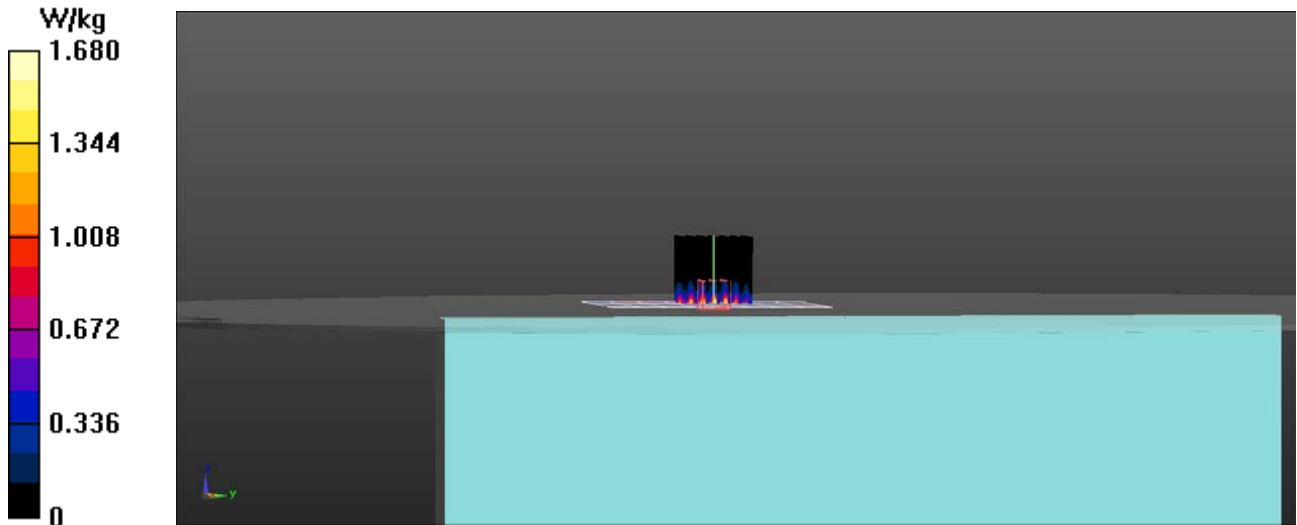

RF Exposure Lab

Plot 15

DUT: TPN-Q225; Type: Tablet PC; Serial: Eng 1

Communication System: WiFi 802.11a (OFDM, 6 Mbps); Frequency: 5620 MHz; Duty Cycle: 1:1
Medium: MSL 3-6 GHz; Medium parameters used: $f = 5620$ MHz; $\sigma = 5.75$ S/m; $\epsilon_r = 48.44$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Test Date: Date: 7/1/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN7530; ConvF(4.29, 4.29, 4.29); Calibrated: 4/3/2019;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1321; Calibrated: 1/10/2019
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

5600 MHz Inpaq/Tablet Bottom Tx1 124/Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.58 W/kg

5600 MHz Inpaq/Tablet Bottom Tx1 124/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 1.751 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 4.06 W/kg
SAR(1 g) = 0.800 W/kg
Maximum value of SAR (measured) = 1.75 W/kg

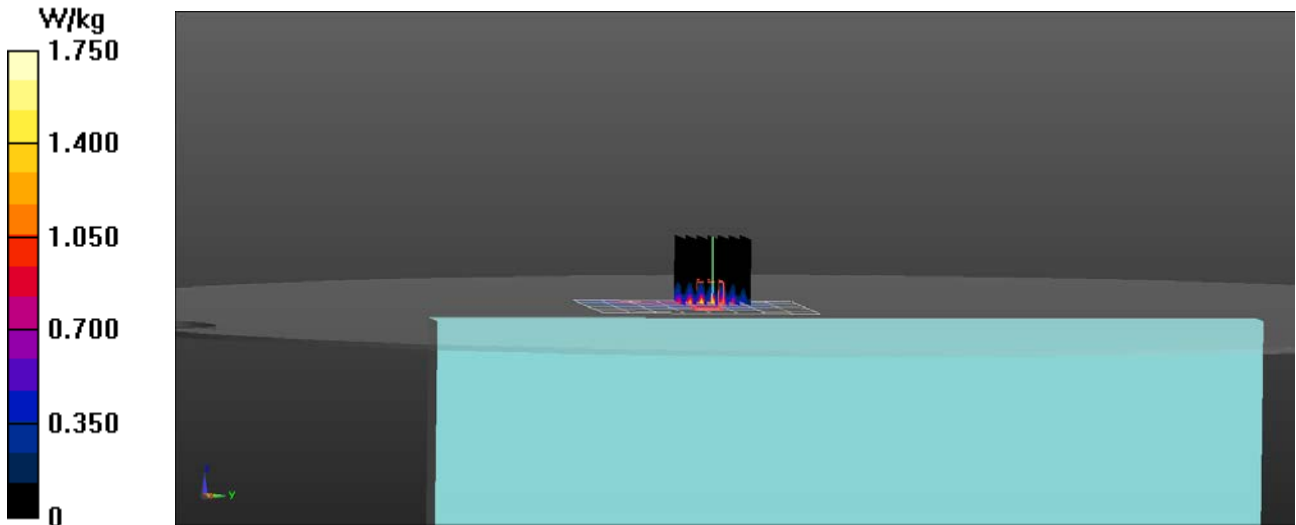

RF Exposure Lab

Plot 16

DUT: TPN-Q225; Type: Tablet PC; Serial: Eng 1

Communication System: WiFi 802.11a (OFDM, 6 Mbps); Frequency: 5785 MHz; Duty Cycle: 1:1
Medium: MSL 3-6 GHz; Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 5.975$ S/m; $\epsilon_r = 48.193$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 7/1/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN7530; ConvF(4.35, 4.35, 4.35); Calibrated: 4/3/2019;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1321; Calibrated: 1/10/2019
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

5800 MHz Inpaq/Tablet Bottom Tx1 157/Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.65 W/kg

5800 MHz Inpaq/Tablet Bottom Tx1 157/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 1.480 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 4.28 W/kg

SAR(1 g) = 0.831 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.80 W/kg

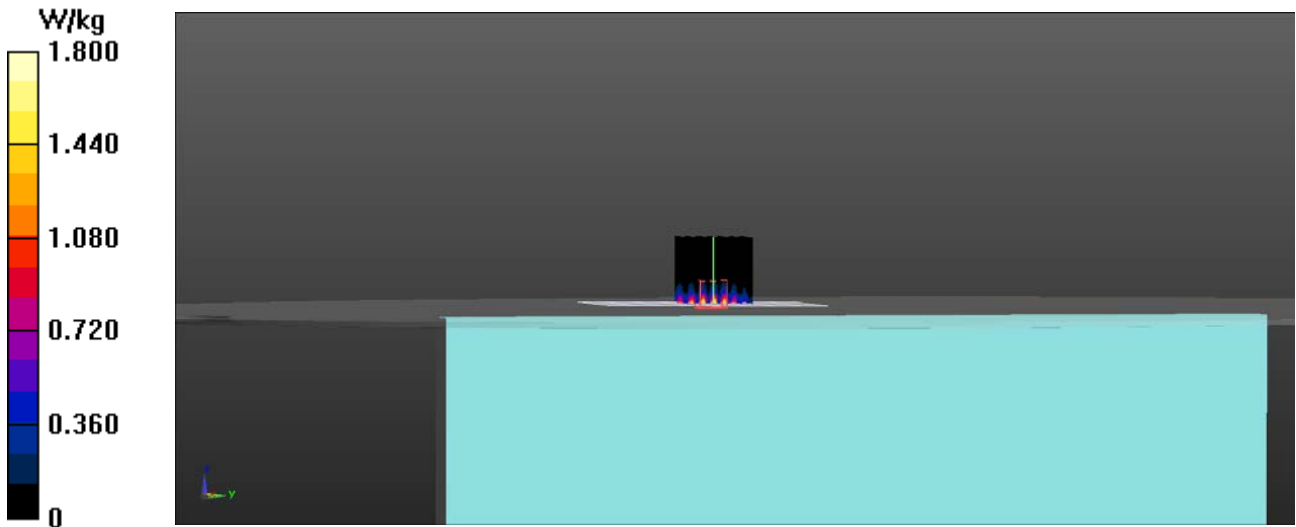

Appendix D – Probe Calibration Data Sheets

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **RF Exposure Lab**

Certificate No: **EX3-3662_Apr19**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3662**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-14.v5, QA CAL-23.v5, QA CAL-25.v7
Calibration procedure for dosimetric E-field probes**

Calibration date: **April 24, 2019**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID | Cal Date (Certificate No.) | Scheduled Calibration |
|----------------------------|------------------|-----------------------------------|------------------------|
| Power meter NRP | SN: 104778 | 03-Apr-19 (No. 217-02892/02893) | Apr-20 |
| Power sensor NRP-Z91 | SN: 103244 | 03-Apr-19 (No. 217-02892) | Apr-20 |
| Power sensor NRP-Z91 | SN: 103245 | 03-Apr-19 (No. 217-02893) | Apr-20 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 04-Apr-19 (No. 217-02894) | Apr-20 |
| DAE4 | SN: 660 | 19-Dec-18 (No. DAE4-660_Dec18) | Dec-19 |
| Reference Probe ES3DV2 | SN: 3013 | 31-Dec-18 (No. ES3-3013_Dec18) | Dec-19 |
| Secondary Standards | ID | Check Date (in house) | Scheduled Check |
| Power meter E4419B | SN: GB41293874 | 06-Apr-16 (in house check Jun-18) | In house check: Jun-20 |
| Power sensor E4412A | SN: MY41498087 | 06-Apr-16 (in house check Jun-18) | In house check: Jun-20 |
| Power sensor E4412A | SN: 000110210 | 06-Apr-16 (in house check Jun-18) | In house check: Jun-20 |
| RF generator HP 8648C | SN: US3642U01700 | 04-Aug-99 (in house check Jun-18) | In house check: Jun-20 |
| Network Analyzer E8358A | SN: US41080477 | 31-Mar-14 (in house check Oct-18) | In house check: Oct-19 |

Calibrated by: **Claudio Leubler** (Name) / **Laboratory Technician** (Function) / *[Signature]* (Signature)

Approved by: **Katja Pokovic** (Name) / **Technical Manager** (Function) / *[Signature]* (Signature)

Issued: April 25, 2019

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

| | |
|--------------------------|---|
| TSL | tissue simulating liquid |
| NORM _{x,y,z} | sensitivity in free space |
| ConvF | sensitivity in TSL / NORM _{x,y,z} |
| DCP | diode compression point |
| CF | crest factor (1/duty_cycle) of the RF signal |
| A, B, C, D | modulation dependent linearization parameters |
| Polarization ϕ | ϕ rotation around probe axis |
| Polarization ϑ | ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis |
| Connector Angle | information used in DASY system to align probe sensor X to the robot coordinate system |

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E^2 -field uncertainty inside TSL (see below *ConvF*).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * *frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3662

Basic Calibration Parameters

| | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|---|----------|----------|----------|-----------|
| Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A | 0.43 | 0.45 | 0.50 | ± 10.1 % |
| DCP (mV) ^B | 100.7 | 100.3 | 97.0 | |

Calibration Results for Modulation Response

| UID | Communication System Name | | A dB | B dB $\sqrt{\mu\text{V}}$ | C | D dB | VR mV | Max dev. | Unc ^E (k=2) |
|-----|---------------------------|---|---------|------------------------------|-----|---------|----------|-------------|---------------------------|
| 0 | CW | X | 0.0 | 0.0 | 1.0 | 0.00 | 157.7 | ±1.9 % | ± 4.7 % |
| | | Y | 0.0 | 0.0 | 1.0 | | 152.9 | | |
| | | Y | 0.0 | 0.0 | 1.0 | | 153.2 | | |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3662

Other Probe Parameters

| | |
|---|------------|
| Sensor Arrangement | Triangular |
| Connector Angle (°) | -22.4 |
| Mechanical Surface Detection Mode | enabled |
| Optical Surface Detection Mode | disabled |
| Probe Overall Length | 337 mm |
| Probe Body Diameter | 10 mm |
| Tip Length | 9 mm |
| Tip Diameter | 2.5 mm |
| Probe Tip to Sensor X Calibration Point | 1 mm |
| Probe Tip to Sensor Y Calibration Point | 1 mm |
| Probe Tip to Sensor Z Calibration Point | 1 mm |
| Recommended Measurement Distance from Surface | 1.4 mm |

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3662

Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) ^C | Relative Permittivity ^F | Conductivity (S/m) ^F | ConvF X | ConvF Y | ConvF Z | Alpha ^G | Depth ^G (mm) | Unc (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-----------|
| 750 | 41.9 | 0.89 | 9.57 | 9.57 | 9.57 | 0.49 | 0.80 | ± 12.0 % |
| 900 | 41.5 | 0.97 | 9.12 | 9.12 | 9.12 | 0.51 | 0.80 | ± 12.0 % |
| 1750 | 40.1 | 1.37 | 8.23 | 8.23 | 8.23 | 0.38 | 0.85 | ± 12.0 % |
| 1900 | 40.0 | 1.40 | 7.90 | 7.90 | 7.90 | 0.37 | 0.85 | ± 12.0 % |
| 2300 | 39.5 | 1.67 | 7.50 | 7.50 | 7.50 | 0.39 | 0.85 | ± 12.0 % |
| 2450 | 39.2 | 1.80 | 7.33 | 7.33 | 7.33 | 0.41 | 0.84 | ± 12.0 % |
| 2600 | 39.0 | 1.96 | 7.21 | 7.21 | 7.21 | 0.42 | 0.85 | ± 12.0 % |
| 3500 | 37.9 | 2.91 | 7.07 | 7.07 | 7.07 | 0.30 | 1.20 | ± 13.1 % |
| 3700 | 37.7 | 3.12 | 6.92 | 6.92 | 6.92 | 0.35 | 1.25 | ± 13.1 % |
| 5250 | 35.9 | 4.71 | 5.05 | 5.05 | 5.05 | 0.40 | 1.80 | ± 13.1 % |
| 5600 | 35.5 | 5.07 | 4.81 | 4.81 | 4.81 | 0.40 | 1.80 | ± 13.1 % |
| 5750 | 35.4 | 5.22 | 4.90 | 4.90 | 4.90 | 0.40 | 1.80 | ± 13.1 % |

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3662

Calibration Parameter Determined in Body Tissue Simulating Media


| f (MHz) ^C | Relative Permittivity ^F | Conductivity (S/m) ^F | ConvF X | ConvF Y | ConvF Z | Alpha ^G | Depth ^G (mm) | Unc (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-----------|
| 750 | 55.5 | 0.96 | 9.55 | 9.55 | 9.55 | 0.47 | 0.80 | ± 12.0 % |
| 900 | 55.0 | 1.05 | 9.34 | 9.34 | 9.34 | 0.45 | 0.80 | ± 12.0 % |
| 1750 | 53.4 | 1.49 | 7.95 | 7.95 | 7.95 | 0.40 | 0.85 | ± 12.0 % |
| 1900 | 53.3 | 1.52 | 7.69 | 7.69 | 7.69 | 0.43 | 0.84 | ± 12.0 % |
| 2300 | 52.9 | 1.81 | 7.43 | 7.43 | 7.43 | 0.40 | 0.86 | ± 12.0 % |
| 2450 | 52.7 | 1.95 | 7.36 | 7.36 | 7.36 | 0.40 | 0.85 | ± 12.0 % |
| 2600 | 52.5 | 2.16 | 7.12 | 7.12 | 7.12 | 0.22 | 0.97 | ± 12.0 % |
| 3500 | 51.3 | 3.31 | 6.83 | 6.83 | 6.83 | 0.30 | 1.25 | ± 13.1 % |
| 3700 | 51.0 | 3.55 | 6.52 | 6.52 | 6.52 | 0.35 | 1.25 | ± 13.1 % |
| 5250 | 48.9 | 5.36 | 4.30 | 4.30 | 4.30 | 0.50 | 1.90 | ± 13.1 % |
| 5600 | 48.5 | 5.77 | 3.87 | 3.87 | 3.87 | 0.50 | 1.90 | ± 13.1 % |
| 5750 | 48.3 | 5.94 | 4.07 | 4.07 | 4.07 | 0.50 | 1.90 | ± 13.1 % |

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.


Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

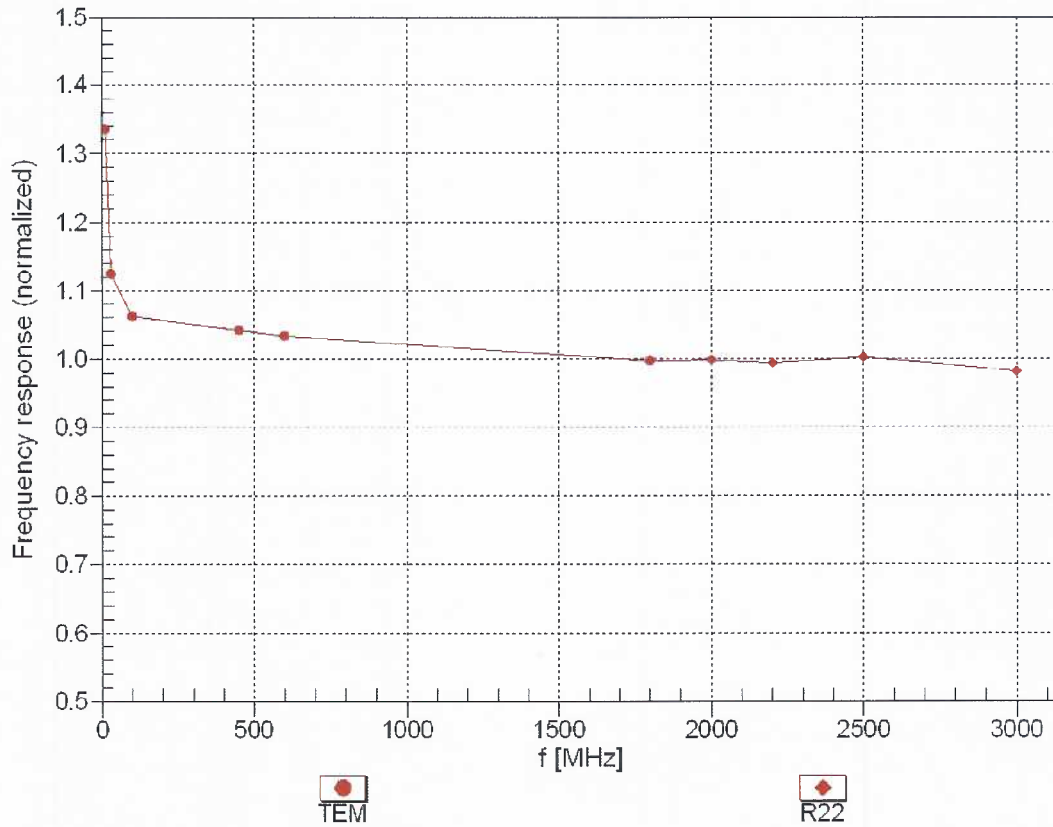



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

f=600 MHz,TEM


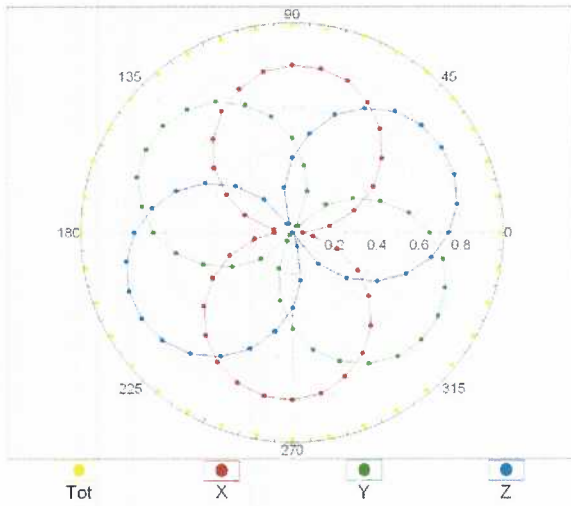


f=1800 MHz,R22

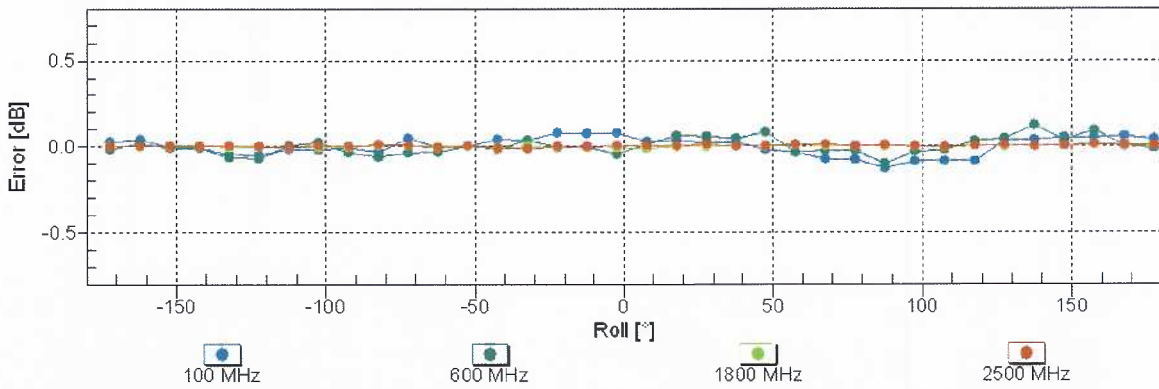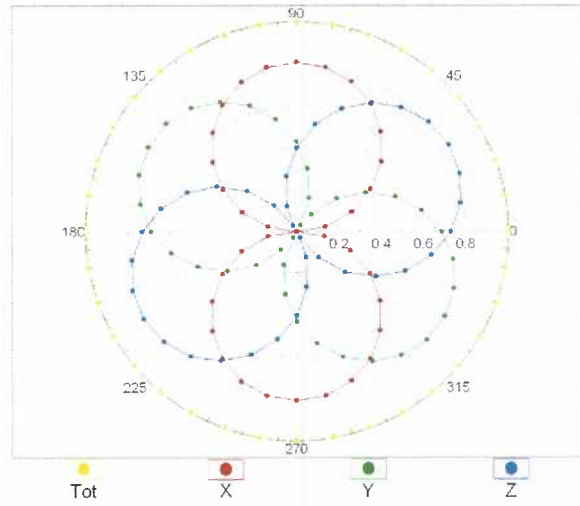


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

Dynamic Range f(SAR_{head}) (TEM cell , f_{eval}= 1900 MHz)

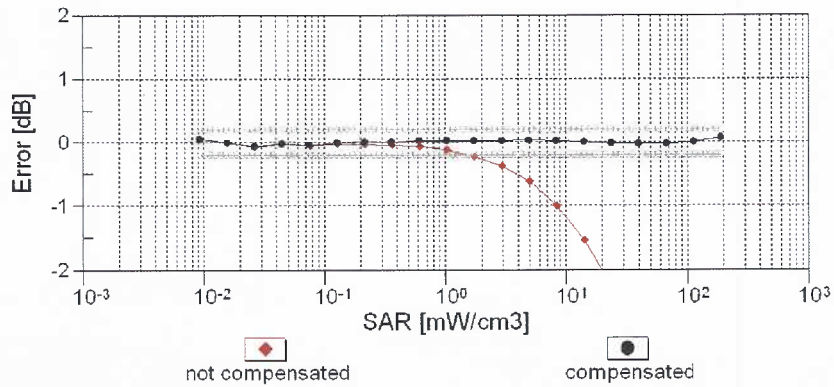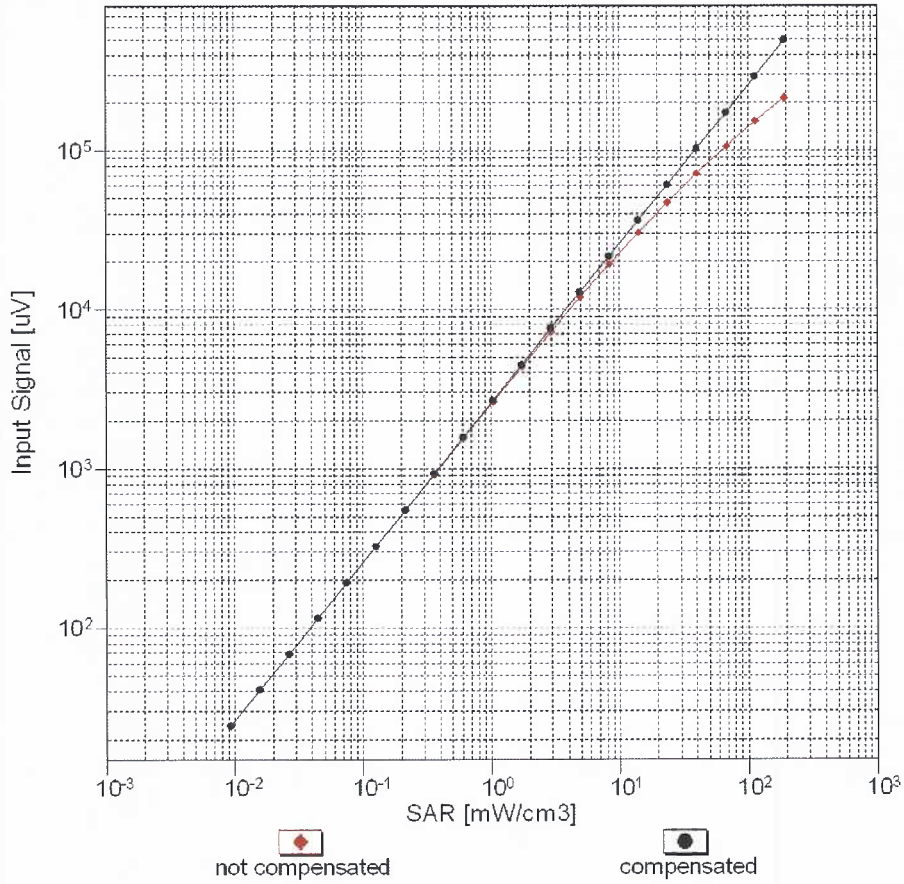


Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Conversion Factor Assessment

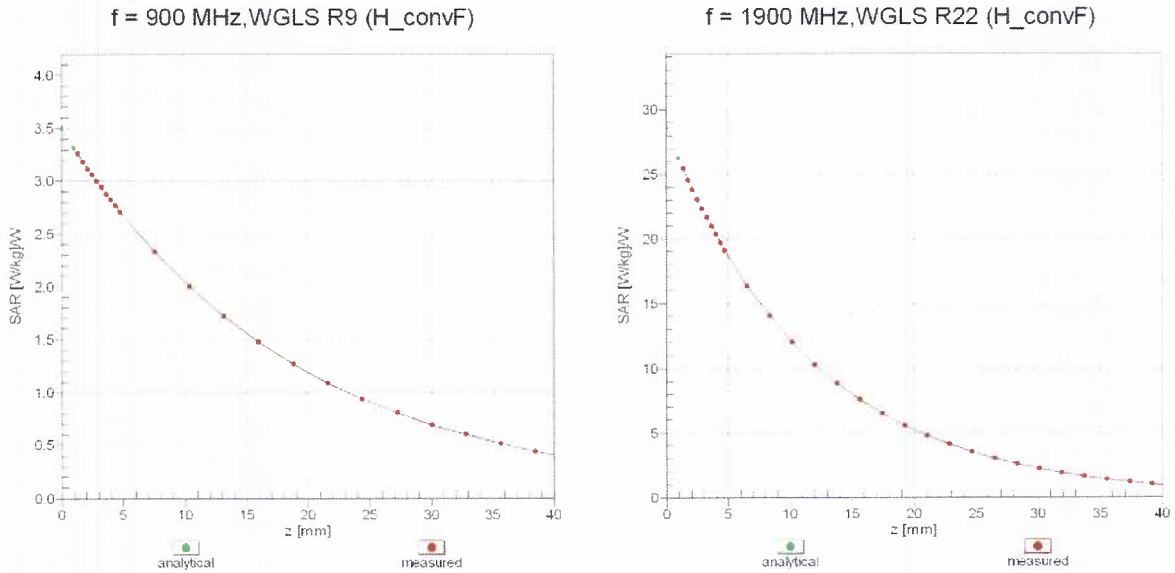

Deviation from Isotropy in Liquid Error (ϕ, θ), f = 900 MHz

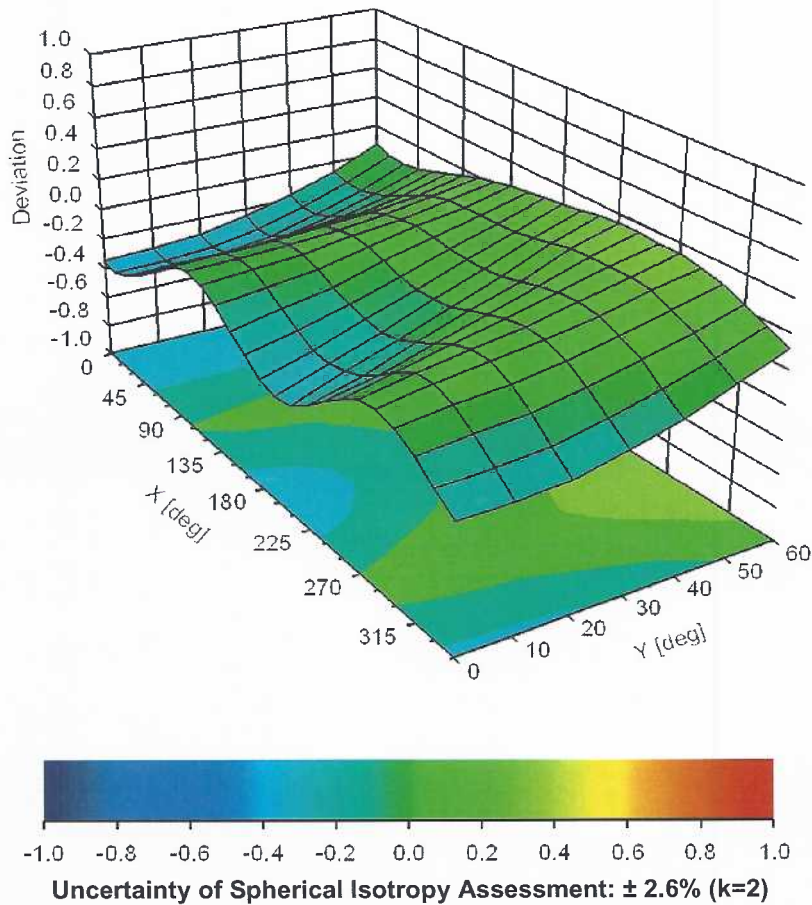

gm

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **RF Exposure Lab**

Certificate No: **EX3-7530_Apr19**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:7530**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-14.v5, QA CAL-23.v5, QA CAL-25.v7**
Calibration procedure for dosimetric E-field probes

Calibration date: **April 3, 2019**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID | Cal Date (Certificate No.) | Scheduled Calibration |
|----------------------------|------------------|-----------------------------------|------------------------|
| Power meter NRP | SN: 104778 | 04-Apr-18 (No. 217-02672/02673) | Apr-19 |
| Power sensor NRP-Z91 | SN: 103244 | 04-Apr-18 (No. 217-02672) | Apr-19 |
| Power sensor NRP-Z91 | SN: 103245 | 04-Apr-18 (No. 217-02673) | Apr-19 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 04-Apr-18 (No. 217-02682) | Apr-19 |
| DAE4 | SN: 660 | 19-Dec-18 (No. DAE4-660_Dec18) | Dec-19 |
| Reference Probe ES3DV2 | SN: 3013 | 31-Dec-18 (No. ES3-3013_Dec18) | Dec-19 |
| Secondary Standards | ID | Check Date (in house) | Scheduled Check |
| Power meter E4419B | SN: GB41293874 | 06-Apr-16 (in house check Jun-18) | In house check: Jun-20 |
| Power sensor E4412A | SN: MY41498087 | 06-Apr-16 (in house check Jun-18) | In house check: Jun-20 |
| Power sensor E4412A | SN: 000110210 | 06-Apr-16 (in house check Jun-18) | In house check: Jun-20 |
| RF generator HP 8648C | SN: US3642U01700 | 04-Aug-99 (in house check Jun-18) | In house check: Jun-20 |
| Network Analyzer E8358A | SN: US41080477 | 31-Mar-14 (in house check Oct-18) | In house check: Oct-19 |

| | | | |
|----------------|------------------------------|--|---------------|
| Calibrated by: | Name Manu Seitz | Function Laboratory Technician | Signature |
| Approved by: | Name Katja Pokovic | Function Technical Manager | |

Issued: April 6, 2019

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

| | |
|-----------------------|---|
| TSL | tissue simulating liquid |
| NORM _{x,y,z} | sensitivity in free space |
| ConvF | sensitivity in TSL / NORM _{x,y,z} |
| DCP | diode compression point |
| CF | crest factor (1/duty_cycle) of the RF signal |
| A, B, C, D | modulation dependent linearization parameters |
| Polarization φ | φ rotation around probe axis |
| Polarization θ | θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., θ = 0 is normal to probe axis |
| Connector Angle | information used in DASY system to align probe sensor X to the robot coordinate system |

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- *NORM_{x,y,z}*: Assessed for E-field polarization θ = 0 (f ≤ 900 MHz in TEM-cell; f > 1800 MHz: R22 waveguide). *NORM_{x,y,z}* are only intermediate values, i.e., the uncertainties of *NORM_{x,y,z}* does not affect the E²-field uncertainty inside TSL (see below *ConvF*).
- *NORM(f)_{x,y,z}* = *NORM_{x,y,z}* * *frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- *DCP_{x,y,z}*: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- *PAR*: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- *A_{x,y,z}*; *B_{x,y,z}*; *C_{x,y,z}*; *D_{x,y,z}*; *VR_{x,y,z}*: *A, B, C, D* are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. *VR* is the maximum calibration range expressed in RMS voltage across the diode.
- *ConvF and Boundary Effect Parameters*: Assessed in flat phantom using E-field (or Temperature Transfer Standard for f ≤ 800 MHz) and inside waveguide using analytical field distributions based on power measurements for f > 800 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to *NORM_{x,y,z}* * *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- *Spherical isotropy (3D deviation from isotropy)*: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- *Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- *Connector Angle*: The angle is assessed using the information gained by determining the *NORM_x* (no uncertainty required).

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7530

Basic Calibration Parameters

| | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|---|----------|----------|----------|-----------|
| Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A | 0.42 | 0.47 | 0.43 | ± 10.1 % |
| DCP (mV) ^B | 99.6 | 100.4 | 100.3 | |

Calibration Results for Modulation Response

| UID | Communication System Name | | A dB | B dB $\sqrt{\mu\text{V}}$ | C | D dB | VR mV | Max dev. | Unc ^E (k=2) |
|-----|---------------------------|---|---------|------------------------------|-----|---------|----------|-------------|---------------------------|
| 0 | CW | X | 0.0 | 0.0 | 1.0 | 0.00 | 163.4 | ±3.3 % | ± 4.7 % |
| | | Y | 0.0 | 0.0 | 1.0 | | 162.3 | | |
| | | Y | 0.0 | 0.0 | 1.0 | | 167.8 | | |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7530

Other Probe Parameters

| | |
|---|------------|
| Sensor Arrangement | Triangular |
| Connector Angle (°) | 36.8 |
| Mechanical Surface Detection Mode | enabled |
| Optical Surface Detection Mode | disabled |
| Probe Overall Length | 337 mm |
| Probe Body Diameter | 10 mm |
| Tip Length | 9 mm |
| Tip Diameter | 2.5 mm |
| Probe Tip to Sensor X Calibration Point | 1 mm |
| Probe Tip to Sensor Y Calibration Point | 1 mm |
| Probe Tip to Sensor Z Calibration Point | 1 mm |
| Recommended Measurement Distance from Surface | 1.4 mm |

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7530

Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) ^C | Relative Permittivity ^F | Conductivity (S/m) ^F | ConvF X | ConvF Y | ConvF Z | Alpha ^G | Depth ^G (mm) | Unc (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-----------|
| 2450 | 39.2 | 1.80 | 7.66 | 7.66 | 7.66 | 0.36 | 0.88 | ± 12.0 % |
| 5250 | 35.9 | 4.71 | 5.41 | 5.41 | 5.41 | 0.40 | 1.80 | ± 13.1 % |
| 5600 | 35.5 | 5.07 | 4.74 | 4.74 | 4.74 | 0.40 | 1.80 | ± 13.1 % |
| 5750 | 35.4 | 5.22 | 5.00 | 5.00 | 5.00 | 0.40 | 1.80 | ± 13.1 % |

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7530

Calibration Parameter Determined in Body Tissue Simulating Media


| f (MHz) ^C | Relative Permittivity ^F | Conductivity (S/m) ^F | ConvF X | ConvF Y | ConvF Z | Alpha ^G | Depth ^G (mm) | Unc (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-----------|
| 2450 | 52.7 | 1.95 | 7.79 | 7.79 | 7.79 | 0.33 | 0.90 | ± 12.0 % |
| 5250 | 48.9 | 5.36 | 4.68 | 4.68 | 4.68 | 0.50 | 1.90 | ± 13.1 % |
| 5600 | 48.5 | 5.77 | 4.29 | 4.29 | 4.29 | 0.50 | 1.90 | ± 13.1 % |
| 5750 | 48.3 | 5.94 | 4.35 | 4.35 | 4.35 | 0.50 | 1.90 | ± 13.1 % |

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)


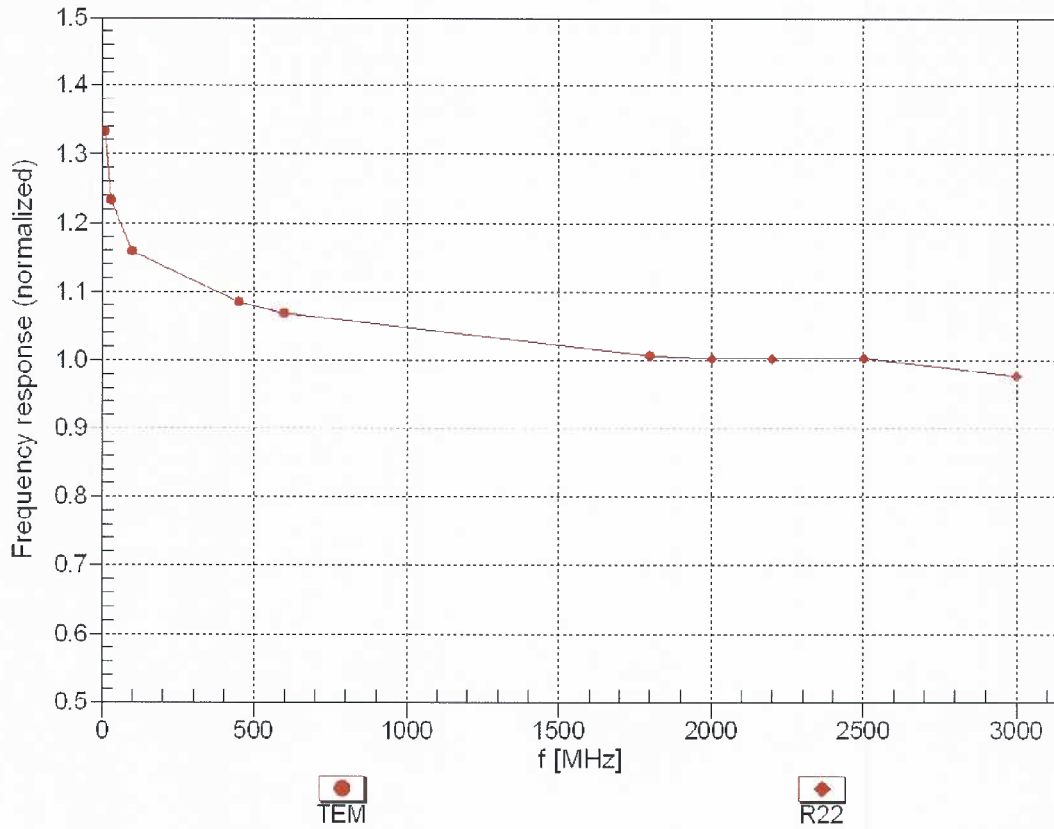


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

Receiving Pattern (ϕ), $\vartheta = 0^\circ$



f=600 MHz,TEM

f=1800 MHz,R22

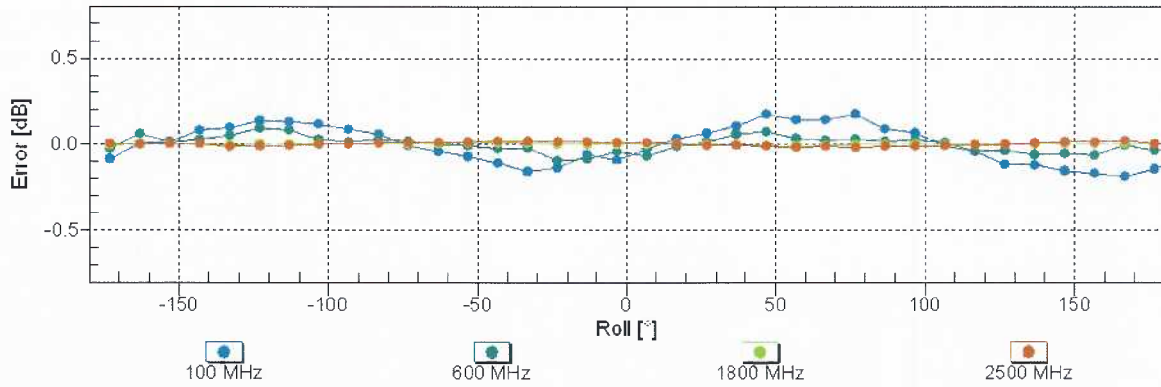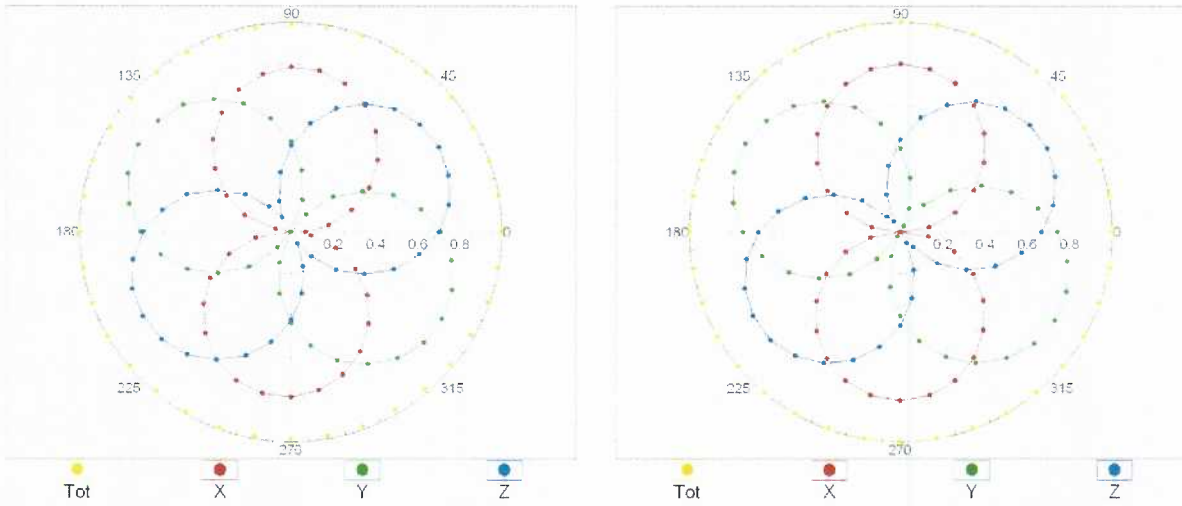


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

Dynamic Range f(SAR_{head}) (TEM cell , f_{eval}= 1900 MHz)

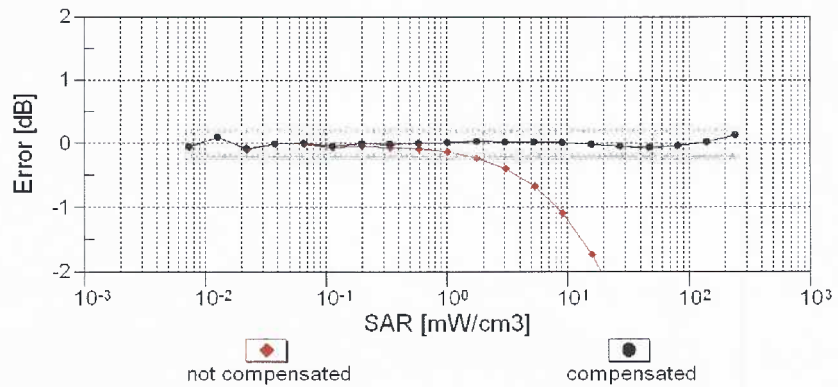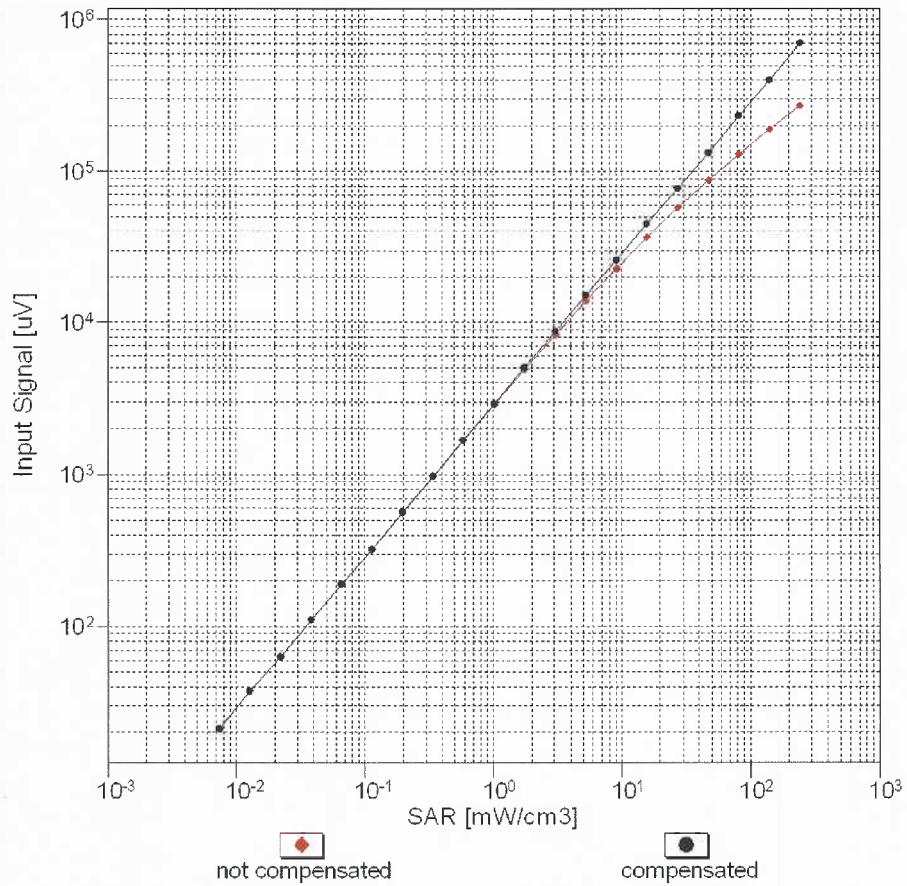


Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Conversion Factor Assessment

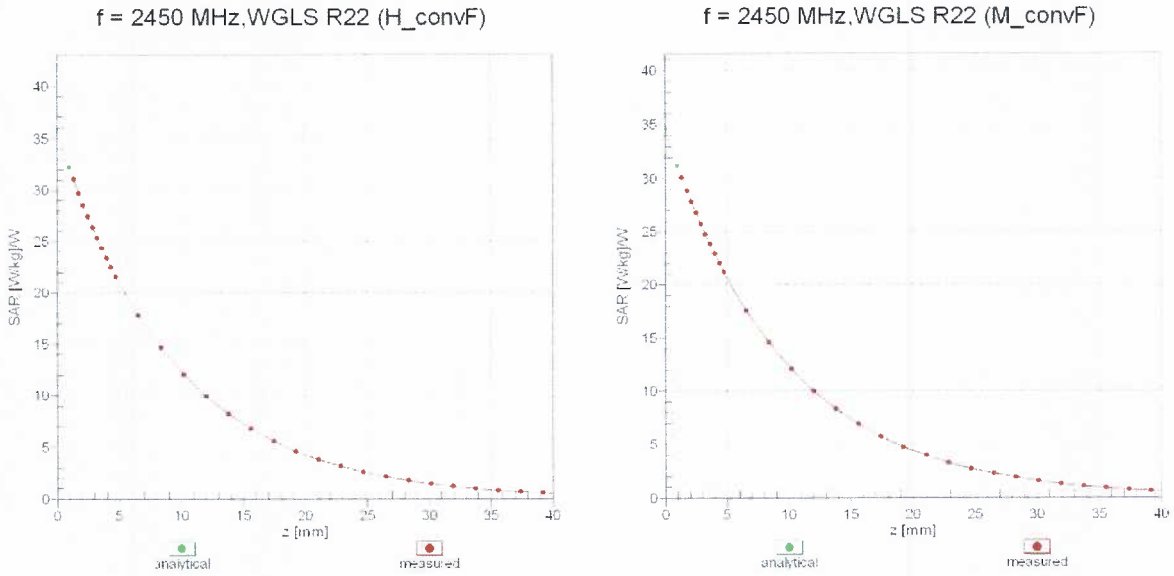

Deviation from Isotropy in Liquid Error (ϕ, ϑ), f = 900 MHz

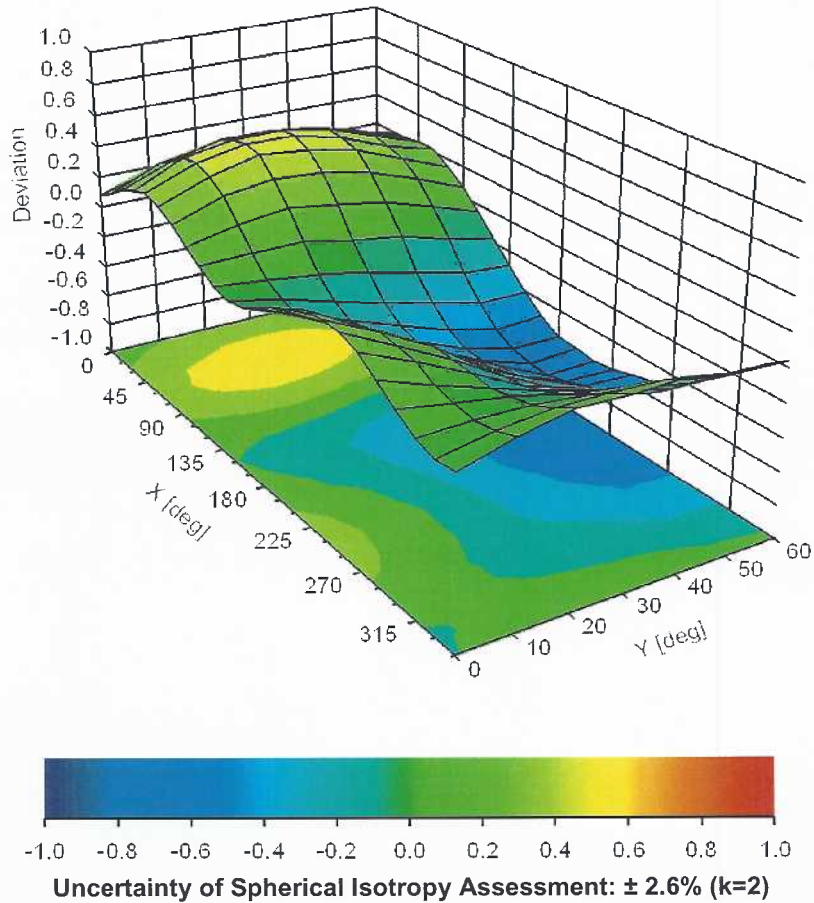

Appendix E – Dipole Calibration Data Sheets



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **RF Exposure Lab**

Certificate No: **D750V3-1016_Jul18**

CALIBRATION CERTIFICATE

Object **D750V3 - SN:1016**

Calibration procedure(s) **QA CAL-05.v10
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **July 13, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|-----------------------------|--------------------|---------------------------------|-----------------------|
| Power meter NRP | SN: 104778 | 04-Apr-18 (No. 217-02672/02673) | Apr-19 |
| Power sensor NRP-Z91 | SN: 103244 | 04-Apr-18 (No. 217-02672) | Apr-19 |
| Power sensor NRP-Z91 | SN: 103245 | 04-Apr-18 (No. 217-02673) | Apr-19 |
| Reference 20 dB Attenuator | SN: 5058 (20k) | 04-Apr-18 (No. 217-02682) | Apr-19 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 04-Apr-18 (No. 217-02683) | Apr-19 |
| Reference Probe EX3DV4 | SN: 7349 | 30-Dec-17 (No. EX3-7349_Dec17) | Dec-18 |
| DAE4 | SN: 601 | 26-Oct-17 (No. DAE4-601_Oct17) | Oct-18 |

| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
|---------------------------------|----------------|-----------------------------------|------------------------|
| Power meter EPM-442A | SN: GB37480704 | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A | SN: US37292783 | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A | SN: MY41092317 | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| RF generator R&S SMT-06 | SN: 100972 | 15-Jun-15 (in house check Oct-16) | In house check: Oct-18 |
| Network Analyzer Agilent E8358A | SN: US41080477 | 31-Mar-14 (in house check Oct-17) | In house check: Oct-18 |

Calibrated by: **Manu Seitz** Name **Laboratory Technician** Function

Approved by: **Katja Pokovic** Name **Technical Manager** Function

Signature

Issued: July 16, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

| | |
|-------|---------------------------------|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A | not applicable or not measured |

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|-------------------------------------|------------------------|-------------|
| DASY Version | DASY5 | V52.10.1 |
| Extrapolation | Advanced Extrapolation | |
| Phantom | Modular Flat Phantom | |
| Distance Dipole Center - TSL | 15 mm | with Spacer |
| Zoom Scan Resolution | dx, dy, dz = 5 mm | |
| Frequency | 750 MHz ± 1 MHz | |

Head TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|--|-----------------|--------------|------------------|
| Nominal Head TSL parameters | 22.0 °C | 41.9 | 0.89 mho/m |
| Measured Head TSL parameters | (22.0 ± 0.2) °C | 40.9 ± 6 % | 0.89 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Head TSL

| SAR averaged over 1 cm³ (1 g) of Head TSL | Condition | |
|---|--------------------|---------------------------------|
| SAR measured | 250 mW input power | 2.07 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 8.23 W/kg ± 17.0 % (k=2) |

| SAR averaged over 10 cm³ (10 g) of Head TSL | condition | |
|---|--------------------|---------------------------------|
| SAR measured | 250 mW input power | 1.35 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 5.38 W/kg ± 16.5 % (k=2) |

Body TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|--|-----------------|--------------|------------------|
| Nominal Body TSL parameters | 22.0 °C | 55.5 | 0.96 mho/m |
| Measured Body TSL parameters | (22.0 ± 0.2) °C | 55.3 ± 6 % | 0.96 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Body TSL

| SAR averaged over 1 cm³ (1 g) of Body TSL | Condition | |
|---|--------------------|---------------------------------|
| SAR measured | 250 mW input power | 2.14 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | 8.55 W/kg ± 17.0 % (k=2) |

| SAR averaged over 10 cm³ (10 g) of Body TSL | condition | |
|---|--------------------|---------------------------------|
| SAR measured | 250 mW input power | 1.41 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | 5.64 W/kg ± 16.5 % (k=2) |

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

| | |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 53.4 Ω + 0.0 j Ω |
| Return Loss | - 29.6 dB |

Antenna Parameters with Body TSL

| | |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 48.8 Ω - 2.6 j Ω |
| Return Loss | - 30.7 dB |

General Antenna Parameters and Design

| | |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.038 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

| | |
|-----------------|----------------|
| Manufactured by | SPEAG |
| Manufactured on | March 22, 2010 |

DASY5 Validation Report for Head TSL

Date: 13.07.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1016

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.22, 10.22, 10.22) @ 750 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 59.03 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 3.10 W/kg


SAR(1 g) = 2.07 W/kg; SAR(10 g) = 1.35 W/kg

Maximum value of SAR (measured) = 2.76 W/kg

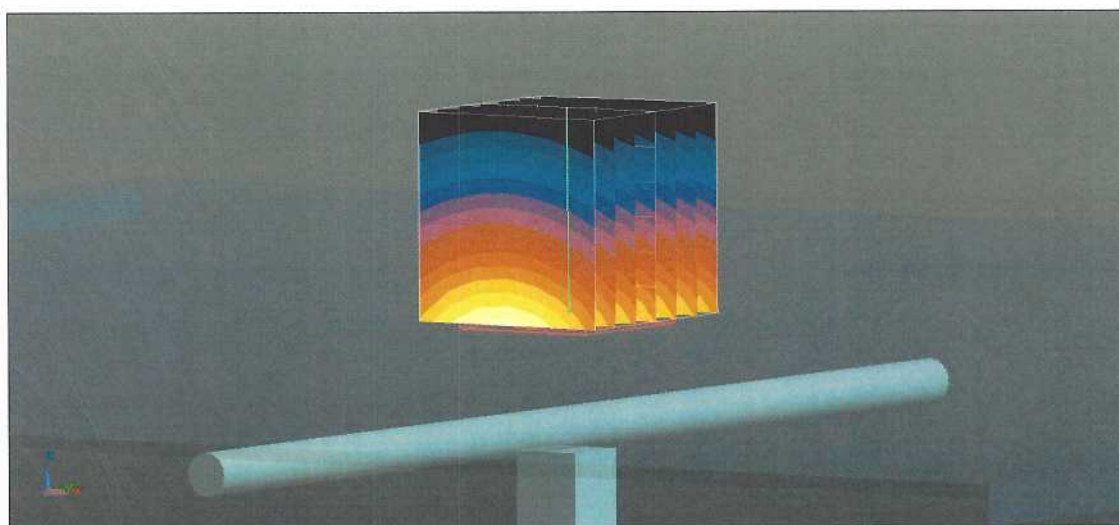

0 dB = 2.76 W/kg = 4.41 dBW/kg

Impedance Measurement Plot for Head TSL

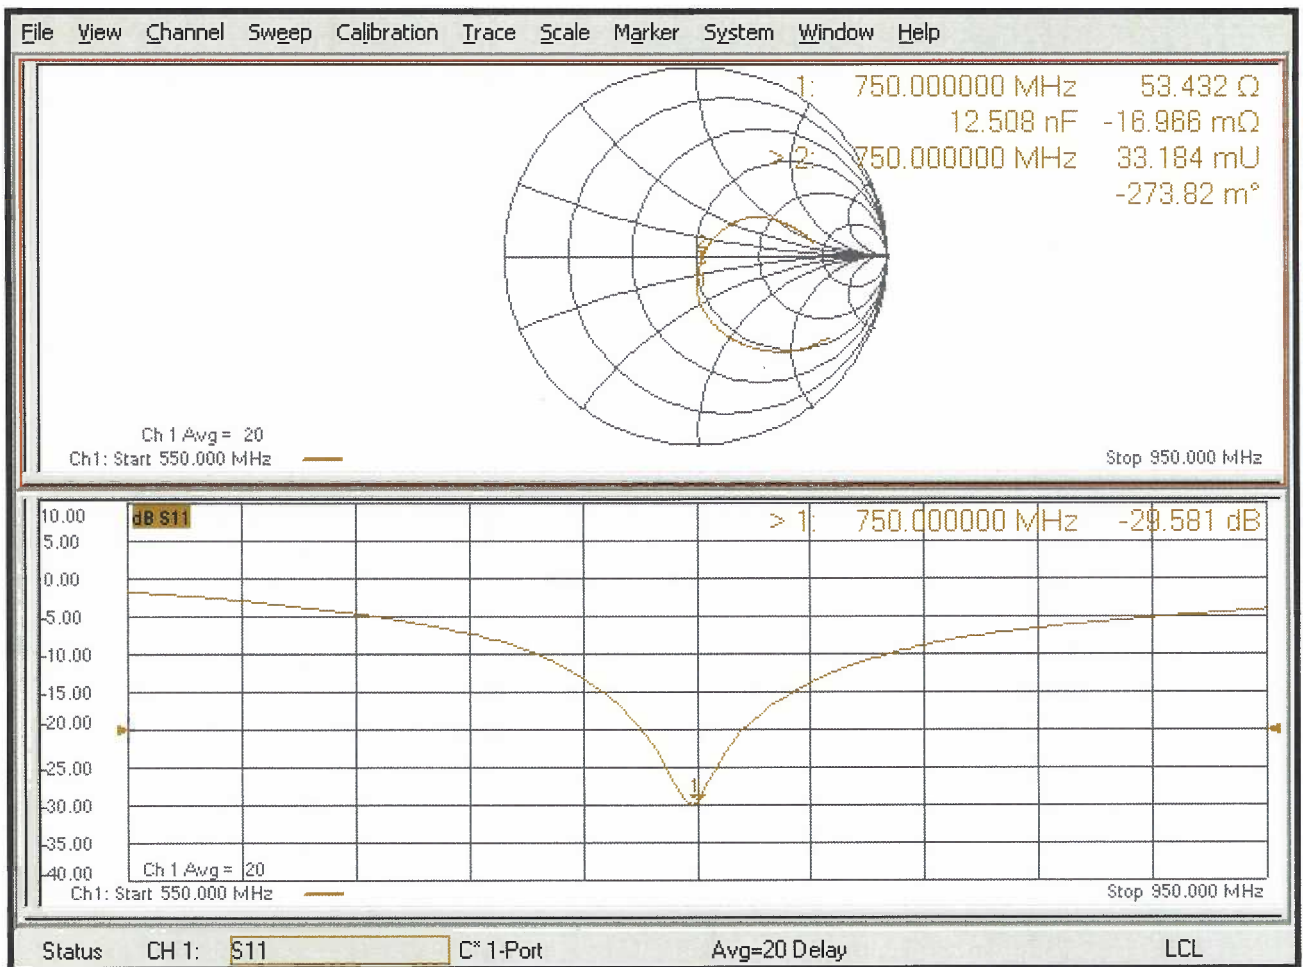

DASY5 Validation Report for Body TSL

Date: 13.07.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1016

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 55.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.19, 10.19, 10.19) @ 750 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 4.9 (Back); Type: QD 00R P49 AA; Serial: 1005
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.68 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 3.18 W/kg


SAR(1 g) = 2.14 W/kg; SAR(10 g) = 1.41 W/kg

Maximum value of SAR (measured) = 2.84 W/kg

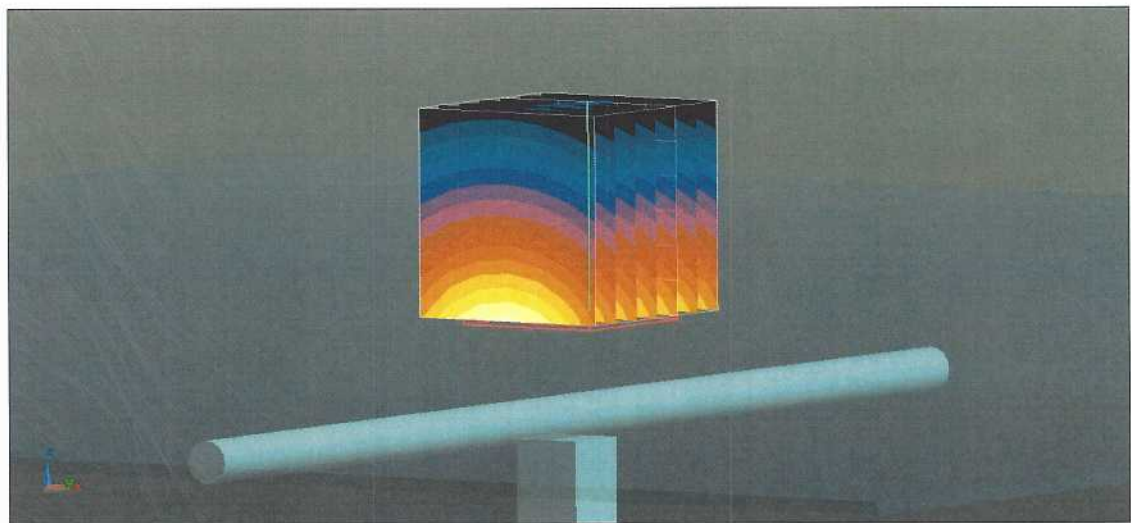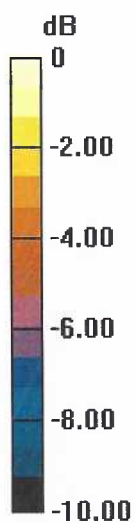

0 dB = 2.84 W/kg = 4.53 dBW/kg

Impedance Measurement Plot for Body TSL

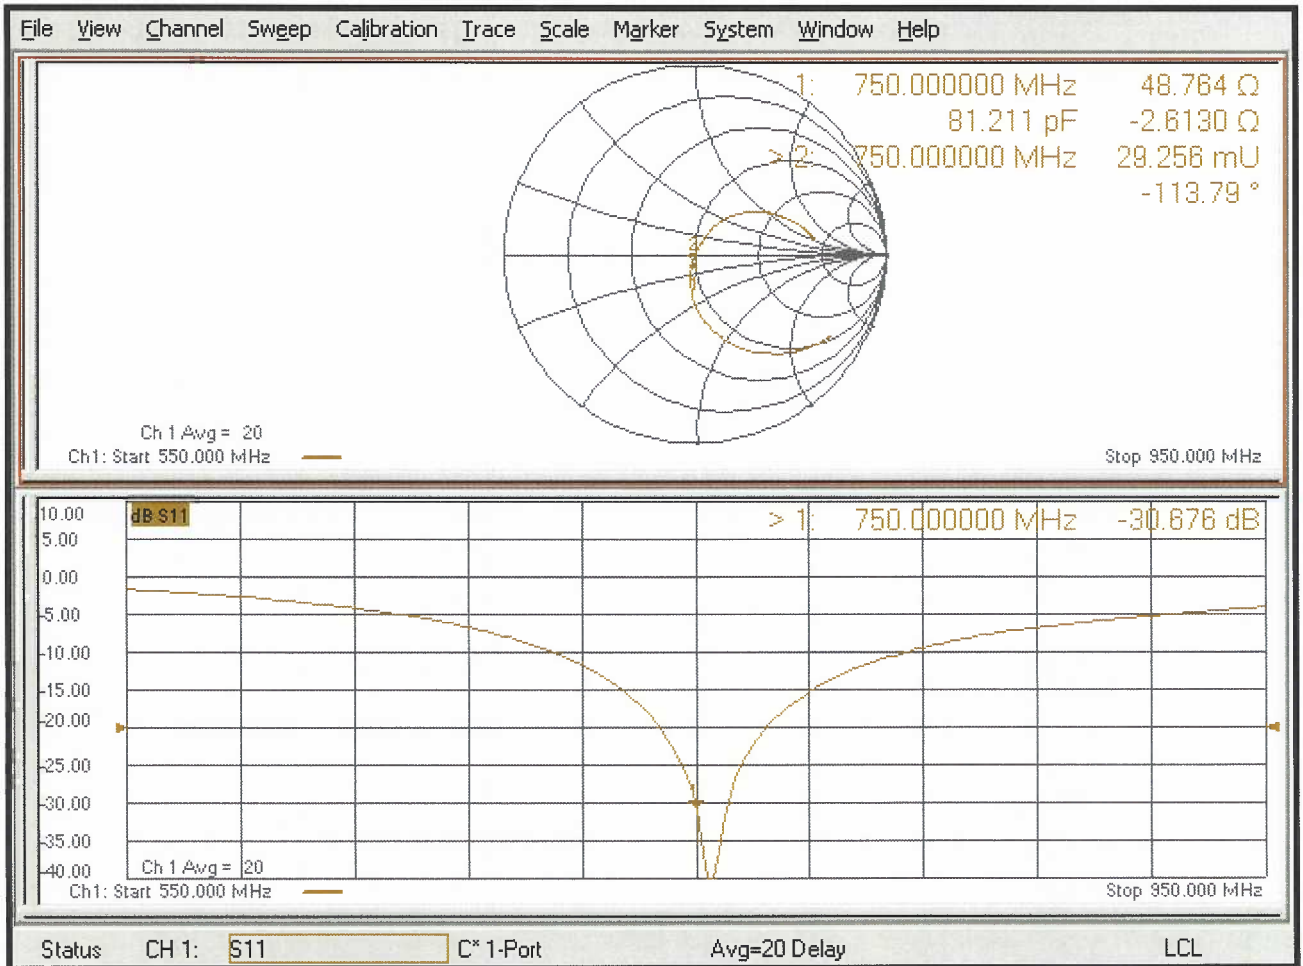



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **RF Exposure Lab**

Certificate No: **D835V2-4d089_Jul18**

CALIBRATION CERTIFICATE

Object **D835V2 - SN:4d089**

Calibration procedure(s) **QA CAL-05.v10
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **July 13, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|-----------------------------|--------------------|---------------------------------|-----------------------|
| Power meter NRP | SN: 104778 | 04-Apr-18 (No. 217-02672/02673) | Apr-19 |
| Power sensor NRP-Z91 | SN: 103244 | 04-Apr-18 (No. 217-02672) | Apr-19 |
| Power sensor NRP-Z91 | SN: 103245 | 04-Apr-18 (No. 217-02673) | Apr-19 |
| Reference 20 dB Attenuator | SN: 5058 (20k) | 04-Apr-18 (No. 217-02682) | Apr-19 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 04-Apr-18 (No. 217-02683) | Apr-19 |
| Reference Probe EX3DV4 | SN: 7349 | 30-Dec-17 (No. EX3-7349_Dec17) | Dec-18 |
| DAE4 | SN: 601 | 26-Oct-17 (No. DAE4-601_Oct17) | Oct-18 |

| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
|---------------------------------|----------------|-----------------------------------|------------------------|
| Power meter EPM-442A | SN: GB37480704 | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A | SN: US37292783 | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A | SN: MY41092317 | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| RF generator R&S SMT-06 | SN: 100972 | 15-Jun-15 (in house check Oct-16) | In house check: Oct-18 |
| Network Analyzer Agilent E8358A | SN: US41080477 | 31-Mar-14 (in house check Oct-17) | In house check: Oct-18 |

Calibrated by: **Manu Seitz** Name: **Manu Seitz** Function: **Laboratory Technician** Signature:

Approved by: **Katja Pokovic** Name: **Katja Pokovic** Function: **Technical Manager** Signature:

Issued: July 17, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

| | |
|-------|---------------------------------|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A | not applicable or not measured |

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|-------------------------------------|------------------------|-------------|
| DASY Version | DASY5 | V52.10.1 |
| Extrapolation | Advanced Extrapolation | |
| Phantom | Modular Flat Phantom | |
| Distance Dipole Center - TSL | 15 mm | with Spacer |
| Zoom Scan Resolution | dx, dy, dz = 5 mm | |
| Frequency | 835 MHz ± 1 MHz | |

Head TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|--|-----------------|--------------|------------------|
| Nominal Head TSL parameters | 22.0 °C | 41.5 | 0.90 mho/m |
| Measured Head TSL parameters | (22.0 ± 0.2) °C | 40.7 ± 6 % | 0.92 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Head TSL

| SAR averaged over 1 cm³ (1 g) of Head TSL | Condition | |
|---|--------------------|---------------------------------|
| SAR measured | 250 mW input power | 2.41 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 9.44 W/kg ± 17.0 % (k=2) |

| SAR averaged over 10 cm³ (10 g) of Head TSL | condition | |
|---|--------------------|---------------------------------|
| SAR measured | 250 mW input power | 1.55 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 6.10 W/kg ± 16.5 % (k=2) |

Body TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|--|-----------------|--------------|------------------|
| Nominal Body TSL parameters | 22.0 °C | 55.2 | 0.97 mho/m |
| Measured Body TSL parameters | (22.0 ± 0.2) °C | 55.2 ± 6 % | 0.99 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Body TSL

| SAR averaged over 1 cm³ (1 g) of Body TSL | Condition | |
|---|--------------------|---------------------------------|
| SAR measured | 250 mW input power | 2.43 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | 9.57 W/kg ± 17.0 % (k=2) |

| SAR averaged over 10 cm³ (10 g) of Body TSL | condition | |
|---|--------------------|---------------------------------|
| SAR measured | 250 mW input power | 1.58 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | 6.24 W/kg ± 16.5 % (k=2) |

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

| | |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 51.6 Ω - 3.3 j Ω |
| Return Loss | - 28.9 dB |

Antenna Parameters with Body TSL

| | |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 47.3 Ω - 5.3 j Ω |
| Return Loss | - 24.3 dB |

General Antenna Parameters and Design

| | |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.391 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

| | |
|-----------------|------------------|
| Manufactured by | SPEAG |
| Manufactured on | October 17, 2008 |