

## Regulatory WLAN Antenna Information

	Vendor Name	Project Code
OEM	Hewlett-Packard Company	Heavenly-Tablet
ODM	Compal Corporation	HAU20
Antenna	Wistron Neweb Corporation	EBC-C

## Antenna Sample / Antenna Data Requirements for worldwide regulatory approval

Section	Description of Required OEM / ODM Antenna Information	US / IC	EU	Japan	Taiwan	S.Korea
1A	Part Number for Antenna only	Required	Required	Required	Required	Required
1B	Antenna Manufacturer Name	Required	Required	Required	Required	Required
1C	Description of Antenna Type	Required	N/A	N/A	N/A	N/A
1D	Part number of Antenna Assembly / cable impedance, length & diameter.	Required	Desired	Desired	Desired	Desired
1E	Main & Aux antenna (Peak Gain W/ cable loss)	Required	Required	Required	Required	Required
	1E OR 1F, 1G, 1H					
1F	Main & Aux antenna (Peak Gain only)	Required	Required	Required	Required	Required
1G	VSWR of cable including connector	Required	Required	Required	Required	Required
1H	Main & Aux antenna (Cable loss W/ connector)	Required	Required	Required	Required	Required
2	Dimensioned Photographs and Drawings of main & auxiliary antennas	Required	Required	Required	Required	Required
3	Radiation patterns of antennas loaded in the host platform.	Required	Desired	Required	N/A	Required
4	Platform model name / number - correlated to antenna manufacturer and antenna part number	Required	Required	Desired	Required	Desired
5	Photograph(s) or Drawings showing location of antennas in platform. (S. Korea requires photographs of antennas for approval submission). Taiwan requires pictures of each antenna type shown in the system.	Required	Required	Desired	Required (Photos)	Required (Photos)
6	Mech. drawings / photos with dimensions of antenna locations and distance from end-user (For evaluation of SAR testing requirement).	Required	N/A	N/A	N/A	N/A
7	Photograph(s) or Drawings showing the location of all antennas (WLAN, BT, other) and distance between those transmitting antennas. Information will be used to evaluate whether co-location testing is required.	Required	N/A	N/A	N/A	N/A

# Antenna Information

## Section 1. Antenna Assembly Specifications


### Antenna Assembly Summary:

1A Antenna Part Number	1B Manufacture	1C Antenna Type	1D Cable Assembly Part Number and Information	1E Peak Gain W/ Cable loss (dBi)	1F Peak Gain w/o Cable Loss (dBi)	1G VSWR	1H Cable Loss (dBi)
<b>Main Antenna</b> (WNC P/N: 81EBC15COMM4)  (customer P/N: DC330015310)	Wistron Newweb Corporation	PIFA	P/N: <b>WN-S-1.13B-380MM-(2-2-1)</b>  50 ohm Coaxial.  length: <b>380 mm</b> diameter: <b>1.13 mm</b> Connector: <b>IPEX</b>	2400-2500MHz	2400-2500MHz	2400-2500MHz	2400-2500MHz
				<b>0.09</b> dBi (peak)	<b>1.50</b> dBi (peak)	<b>2.0</b> max	<b>1.41</b> dBi (peak)
				5150-5350MHz	5150-5350MHz	5150-5350MHz	5150-5350MHz
				<b>1.17</b> dBi (peak)	<b>3.26</b> dBi (peak)	<b>2.5</b> max	<b>2.09</b> dBi (peak)
<b>AUX Antenna</b> (WNC P/N: 81EBC15COMA4)  (customer P/N: DC330015410)	Wistron Newweb Corporation	PIFA	P/N: <b>WN-S-1.13W-550MM-(2-2-1)</b>  50 ohm Coaxial.  length: <b>550 mm</b> diameter: <b>1.13 mm</b> Connector: <b>IPEX</b>	2400-2500MHz	2400-2500MHz	2400-2500MHz	2400-2500MHz
				<b>-0.61</b> dBi (peak)	<b>1.34</b> dBi (peak)	<b>2.0</b> max	<b>1.95</b> dBi (peak)
				5150-5350MHz	5150-5350MHz	5150-5350MHz	5150-5350MHz
				<b>0.04</b> dBi (peak)	<b>2.96</b> dBi (peak)	<b>2.5</b> max	<b>2.91</b> dBi (peak)
				5470-5725MHz	5470-5725MHz	5470-5725MHz	5470-5725MHz
				<b>3.66</b> dBi (peak)	<b>5.79</b> dBi (peak)	<b>2.5</b> max	<b>2.13</b> dBi (peak)
				5725-5825MHz	5725-5825MHz	5725-5825MHz	5725-5825MHz
				<b>3.34</b> dBi (peak)	<b>5.54</b> dBi (peak)	<b>2.5</b> max	<b>2.20</b> dBi (peak)
				2400-2500MHz	2400-2500MHz	2400-2500MHz	2400-2500MHz
				<b>0.61</b> dBi (peak)	<b>1.34</b> dBi (peak)	<b>2.0</b> max	<b>1.95</b> dBi (peak)
				5150-5350MHz	5150-5350MHz	5150-5350MHz	5150-5350MHz
				<b>0.04</b> dBi (peak)	<b>2.96</b> dBi (peak)	<b>2.5</b> max	<b>2.91</b> dBi (peak)
				5470-5725MHz	5470-5725MHz	5470-5725MHz	5470-5725MHz
				<b>1.66</b> dBi (peak)	<b>4.64</b> dBi (peak)	<b>2.5</b> max	<b>2.98</b> dBi (peak)
				5725-5825MHz	5725-5825MHz	5725-5825MHz	5725-5825MHz
				<b>1.24</b> dBi (peak)	<b>4.31</b> dBi (peak)	<b>2.5</b> max	<b>3.08</b> dBi (peak)

## Section 2. Dimensioned Photos or Drawings of Antennas

Include a dimensioned photo and dimensioned drawing of main antenna here.

### Main Antenna Dimensioned Drawing:

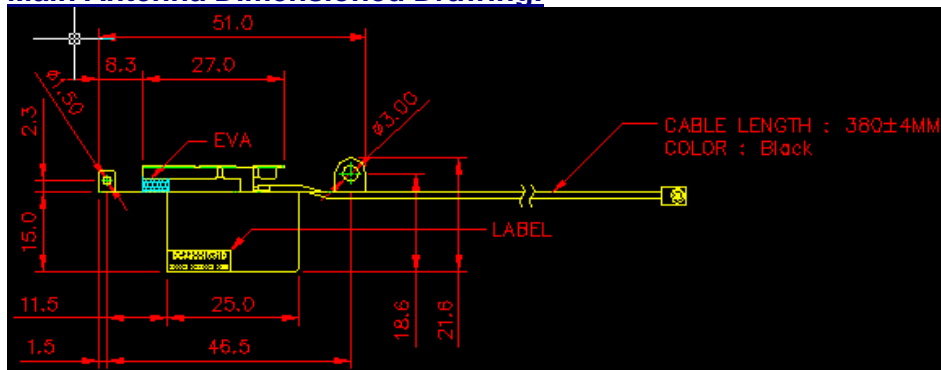


### Main Antenna Photo:




Include a dimensioned photo and dimensioned drawing of aux antenna here.

**Aux Antenna Dimensioned Drawing:**

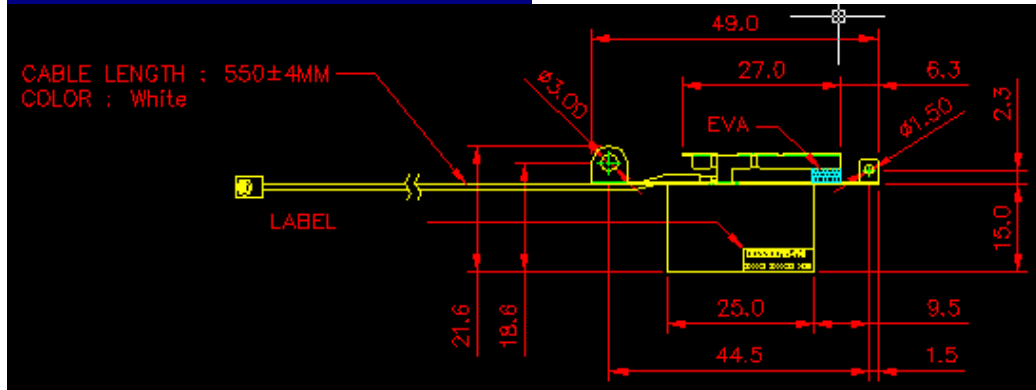


**Aux Antenna Photo:**

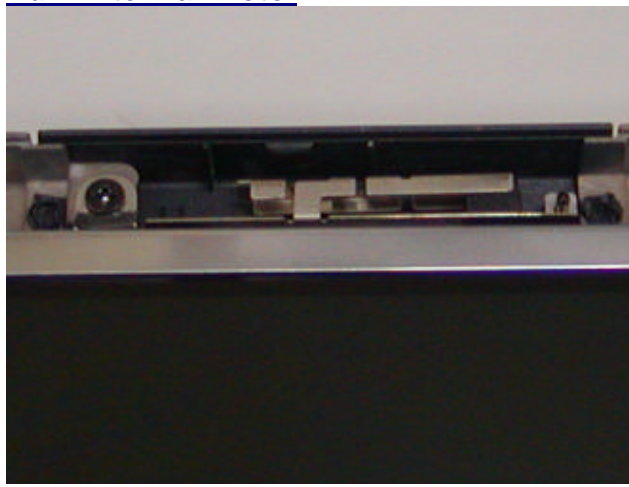


## Section 3. Radiation characteristics of antennae Loaded in Host Platform

### 2400-2500MHz radiation characteristic

#### Main antenna: 2400 MHz

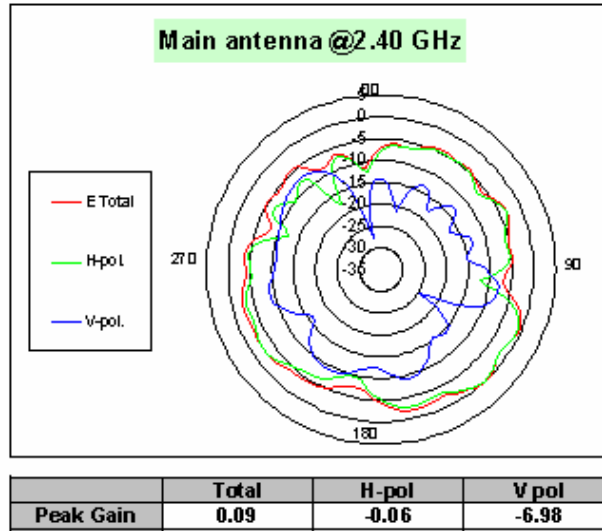


### Main antenna: 2450 MHz

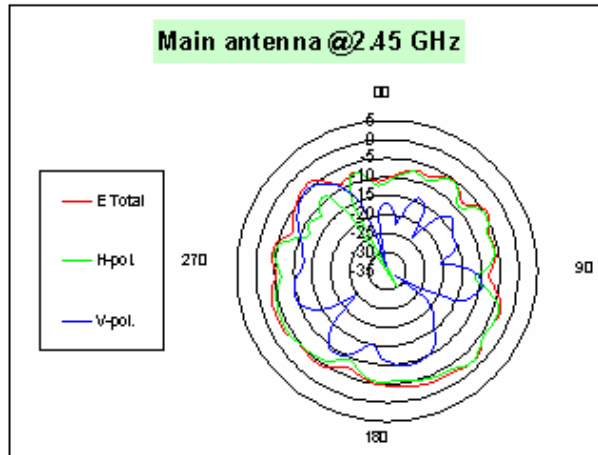


	Total	H-pol	V pol
Peak Gain	-1.87	-2.02	-4.77

### Main antenna: 2500 MHz

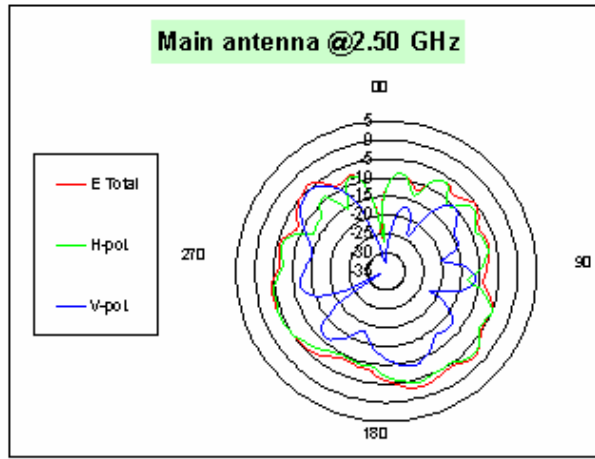

	Total	H-pol	V pol
Peak Gain	-2.54	-2.98	-5.32


### Auxiliary antenna: 2400 MHz

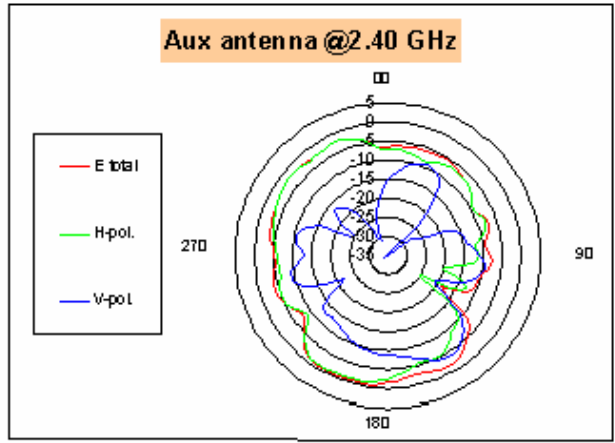

	Total	H-pol	V pol
<b>Peak Gain</b>	<b>-0.61</b>	<b>-0.94</b>	<b>-4.00</b>




### Auxiliary antenna: 2450 MHz

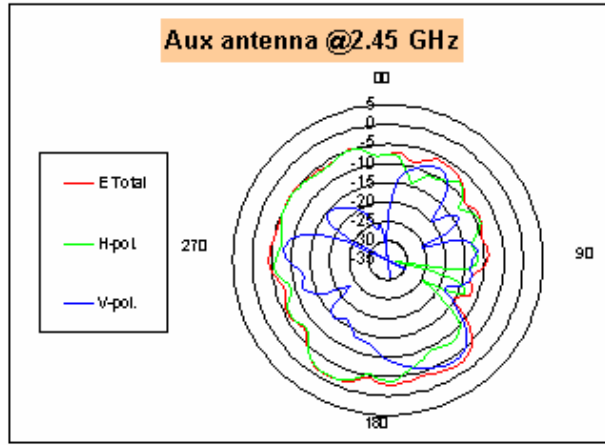

	Total	H-pol	V pol
Peak Gain	-1.41	-1.60	-3.79


**Auxiliary antenna: 2500 MHz**

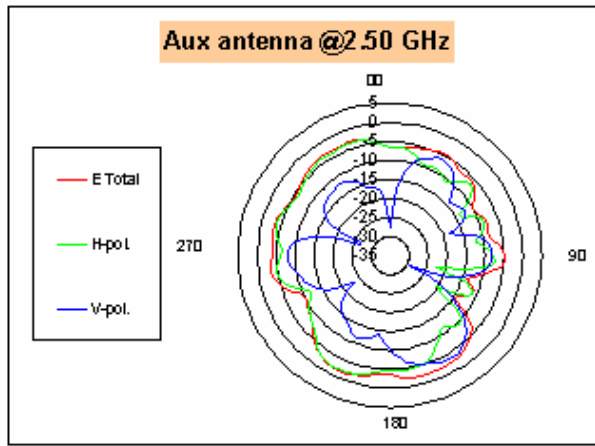

	Total	H-pol	V pol
<b>Peak Gain</b>	<b>-1.69</b>	<b>-2.11</b>	<b>-3.58</b>


### 5150-5350 MHz radiation characteristic

#### Main antenna: 5150 MHz

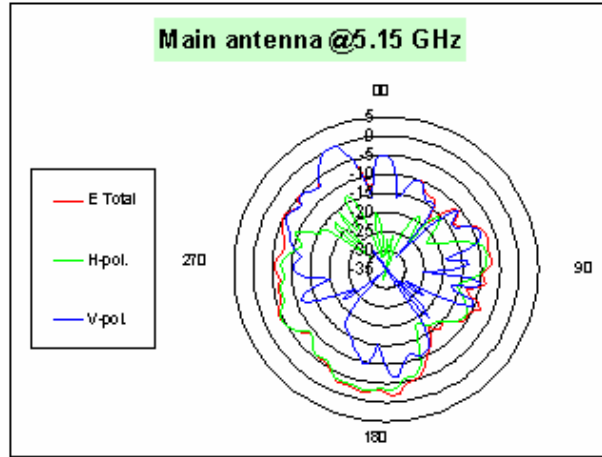


	Total	H-pol	V pol
Peak Gain	0.29	-2.80	0.18

### Main antenna: 5250 MHz

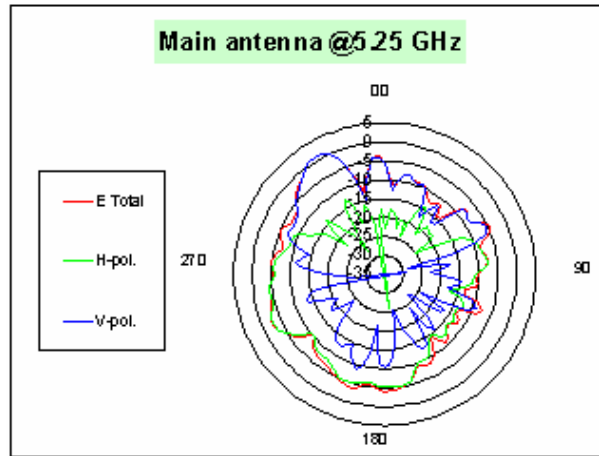


	Total	H-pol	V pol
Peak Gain	1.17	-2.59	1.05

### Main antenna: 5350 MHz

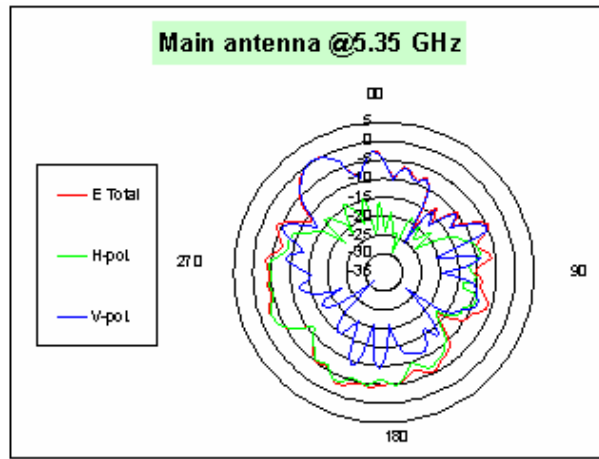


	Total	H-pol	V pol
Peak Gain	0.33	-2.72	0.18

### Auxiliary antenna: 5150 MHz

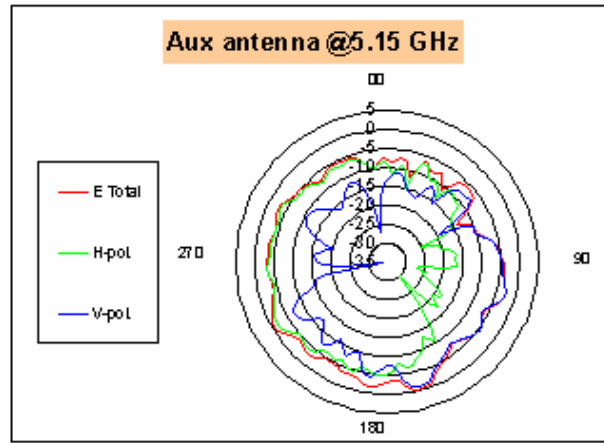


	Total	H-pol	V pol
Peak Gain	0.04	-1.71	-0.91

### Auxiliary antenna: 5250 MHz

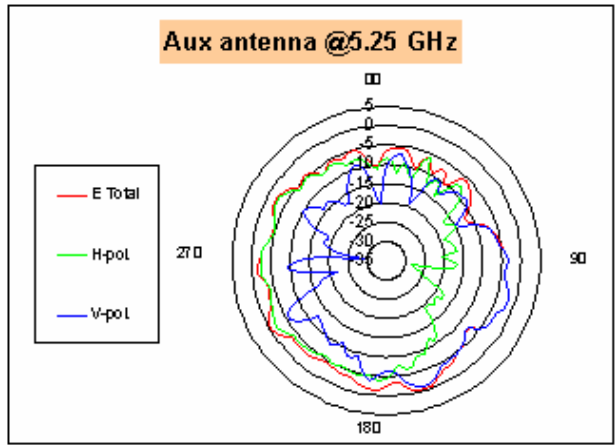

	Total	H-pol	V pol
Peak Gain	-0.09	-1.51	-1.07

### Auxiliary antenna: 5350 MHz

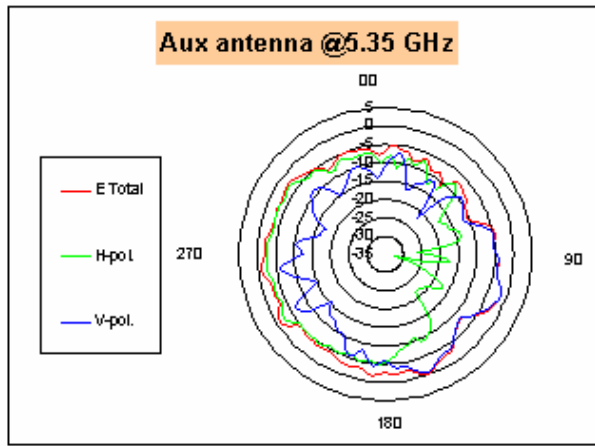


	Total	H-pol	V pol
<b>Peak Gain</b>	<b>-0.19</b>	<b>-2.27</b>	<b>-0.58</b>




### 5470-5725MHz radiation characteristic

#### Main antenna: 5470 MHz

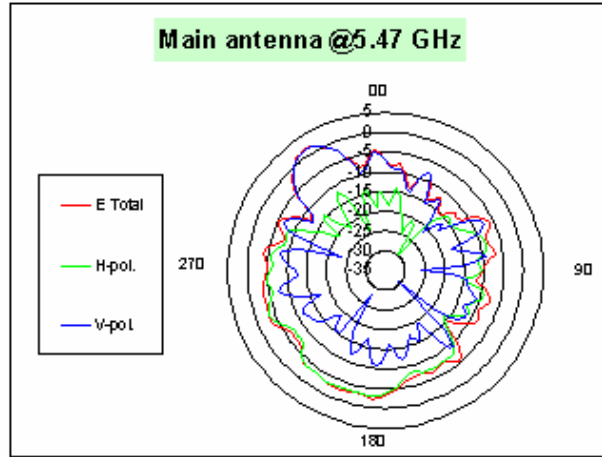


	Total	H-pol	V pol
Peak Gain	1.91	-2.90	1.77

### Main antenna: 5647.5 MHz

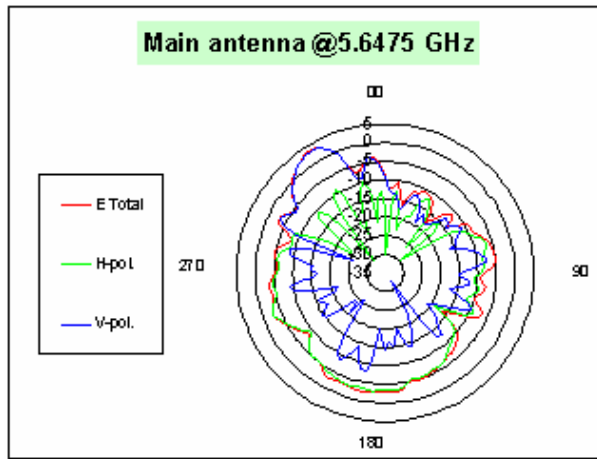


	Total	H-pol	V pol
Peak Gain	3.66	-2.75	3.39

### Main antenna: 5825 MHz

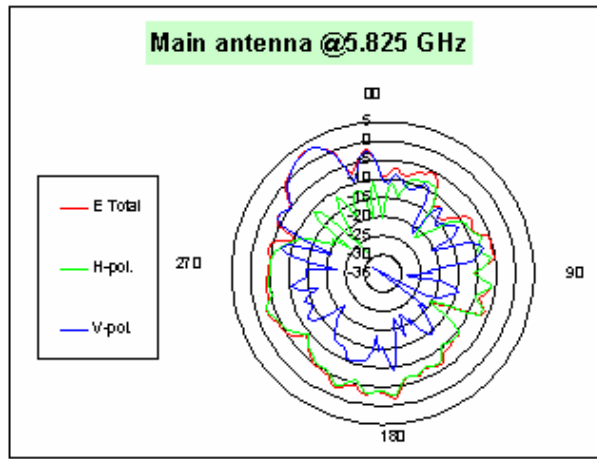


	Total	H-pol	V pol
Peak Gain	3.34	-2.73	3.20

**Auxiliary antenna: 5470 MHz**

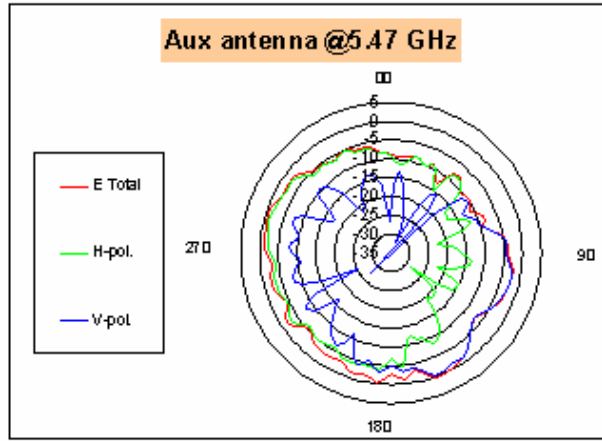


	Total	H-pol	V-pol
<b>Peak Gain</b>	<b>0.34</b>	<b>-1.48</b>	<b>-0.13</b>

### Auxiliary antenna: 5647.5 MHz

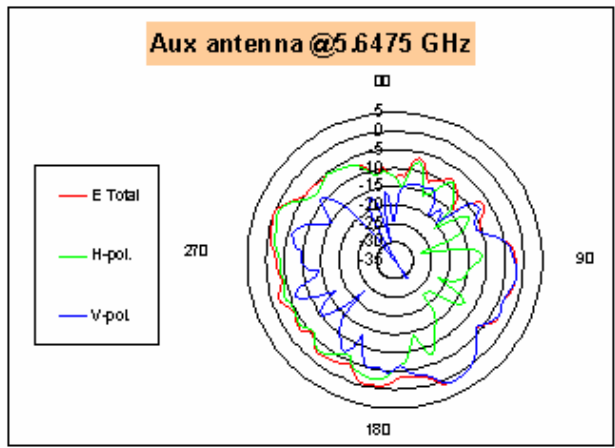

	Total	H-pol	V-pol
<b>Peak Gain</b>	<b>1.66</b>	<b>-0.66</b>	<b>1.29</b>

### Auxiliary antenna: 5825 MHz

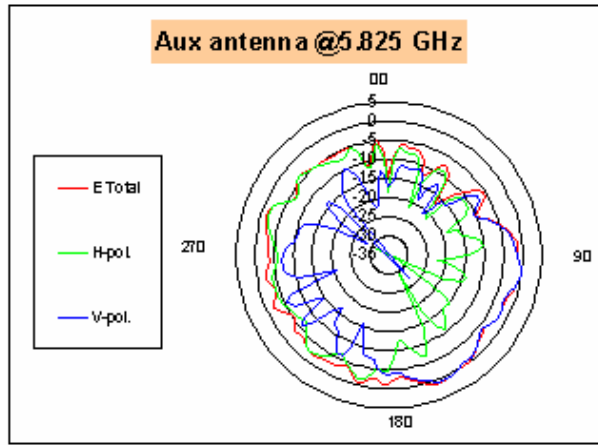

	Total	H-pol	V pol
Peak Gain	1.24	-1.44	0.79



## Section 4. Host Platform Information

OEM / ODM Host platform: (XXXXXXX) platform correlated to antenna data  
Rating Label Photo:

Module Location Photo: (if Singapore required)

## Section 5. Antenna Host Platform Location Information

Include a dimensioned photos or dimensioned drawings of main and auxiliary antenna placements.

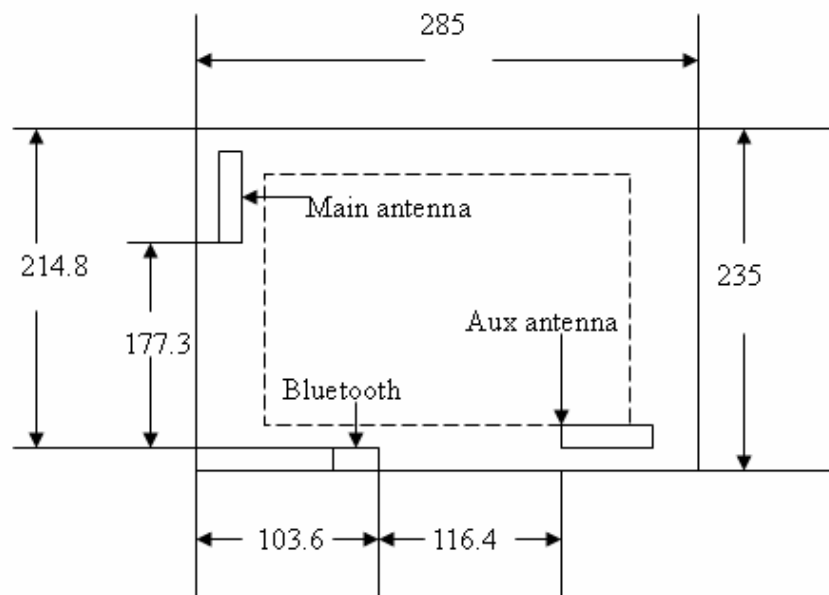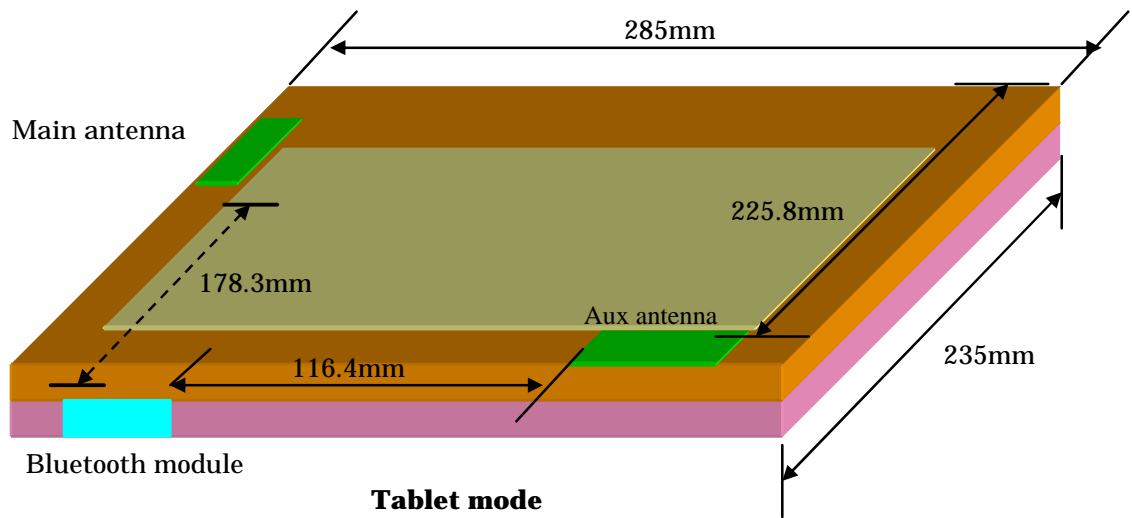



## Section 6. Antenna dimensional information for SAR evaluation

Include a dimensioned photos or dimensioned drawings showing the distance (mm) between the transmit (main) antenna and the user (excluding hands, wrist, feet, and ankle)



## Section 7. Diagram Example of Co-Location Antenna Separation

Indicate distance between WLAN module antennas and Bluetooth/other radio antenna element.

(Note: Due to the evolving rules regarding co-location, each platform will need to be reviewed on a case by case basis)

