#### **CETECOM Inc.**

411 Dixon Landing Road, Milpitas, CA-95035, USA Phone: +1 408 586 6200 Fax: +1 408 586 6299

www.cetecom.com



Issued test report consists of 48 Pages

Page 1 (48)

FCC LISTED, REG. NO.: 101450 &
RECOGNIZED BY INDUSTRY CANADA
IC – 3925

Test report no.:173FCC/2001\_2WLAN
FCC Part 15.247
FCC ID: B94xt1000WLAN
(HP Omnibook xt1000)



### **Table of Contents**

- 1 General information
- 1.1 Notes
- 1.2 Testing laboratory
- 1.3 Details of applicant
- 1.4 Application details
- 1.5 Test item
- 1.6 Test standards
- 2 Technical test
- 2.1 Summary of test results
- 2.2 Test report
- 1 General information

#### 1.1 Notes

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM Inc. USA does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc. USA.

### **TEST REPORT PREPARED BY:**

EMC & Radio Engineer: Harpreet Sidhu

#### 1.2 Testing laboratory

#### **CETECOM Inc.**

411 Dixon Landing Road, Milpitas, CA-95035, USA Phone: +1 408 586 6200 Fax: +1 408 586 6299

E-mail: lothar.schmidt@cetecomusa.com

Internet: www.cetecom.com



#### 1.3 Details of applicant

Name : Hewlett Packard Street : 19310 Pruneridge Av.

City : Cupertino, CA

Country: USA

Contact : Richard Barbin Telephone : 408 343 7972 Telefax : 408 343 7366

e-mail : richard\_barbin@hp.com

1.4 Application details

Date of receipt of application : 2001-07-10 Date of receipt of test item : 2001-09-26

Date of test : 2001-09-26/27/28

1.5 Test item

Manufacturer : applicant

Name of EUT : T60H300.01 installed into HP Omnibook xt1000

Description : 802.11b wireless card

Model No. : T60H300.01

Serial No. : N/A

FCC ID : B94xt1000WLAN

Additional informations

Frequency : 2.412 – 2.462 GHz for US, 2.412 – 2.472 GHz for EU

Type of modulation : DBPSK at 1Mb/s; DQPSK at 2Mb/s; CCK at 5.5.11Mb/s

Number of channels : 11 Channels in US, 13 Channels in EU

Antenna : Internal Power supply : 3.3V Output power : 15dBm

Extreme Vol. Limits : 2.97V - 3.63VExtreme Temp. Limits :  $0^{\circ}C - +40^{\circ}C$ 

1.6 Test standards : FCC Part 15 §15.247



Technical responsibility for area of testing:

2001-10-25 EMC & Radio Lothar Schmidt

Date Section Name Signature



2.2 Testreport

**TEST REPORT** 

Testreport no.: 173FCC/2001\_2WLAN FCC ID: B94xt1000WLAN (HP Omnibook xt1000)



### TEST REPORT REFERENCE

#### LIST OF MEASUREMENTS

Paragraph	PARAMETER TO BE MEASURED	PAGE	
	Transmitter parameters		
§ 15.247 (a)(2)	Spectrum Bandwith of a DSSS System	7	
§ 15.247 (b)(1)	Maximum peak output power	11	
§ 15.247 (c)(1)	<b>Emission limitations</b>	19	
§ 15.247 (d)	Power Spectral Density	37	
§ 15.107	Conducted emissions	41	
	Receiver parameters		
§ 15.209	<b>Receiver Spurious Radiation</b>	43	
	Test equipment listing	48	



#### SPECTRUM BANDWITH OF DSSS-SYSTEM

**SUBCLAUSE § 15.247 (a)(2)** 

TEST CONDITIONS		6 dB BANDWIDTH ( kHz )			
Frequenc	cy (MHz)	2412	2437	2462	
T <sub>nom</sub> (23)°C	$V_{nom}(3.3)V$	9919	9619	9919	
Measurement uncertainty			±3dB	1	

**LIMIT** 

**SUBCLAUSE §15.247(a) (2)** 


The minimum 6dB bandwith shall shall be at least 500 KHz



#### SPECTRUM BANDWITH OF DSSS-SYSTEM

SUBCLAUSE § 15.247 (a)(2)

**Low Channel: 2412 MHz** 

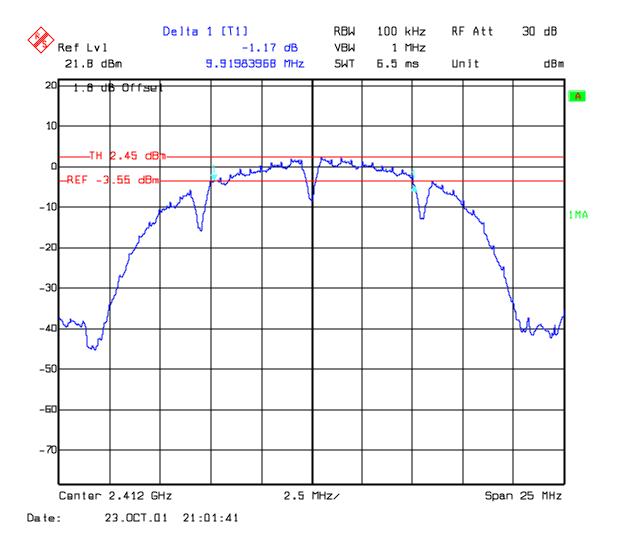

**LIMIT** 

**SUBCLAUSE §15.247(a) (2)** 


The minimum 6dB bandwith shall shall be at least 500 KHz



#### SPECTRUM BANDWITH OF DSSS-SYSTEM

SUBCLAUSE § 15.247 (a)(2)

Mid Channel: 2437 MHz

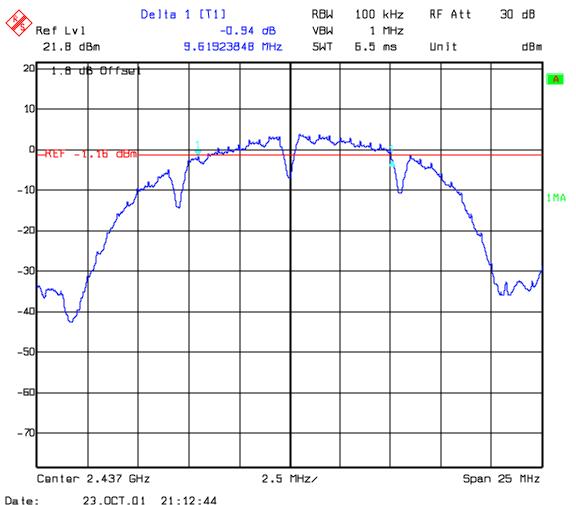

23.001.01 21.12.44

**LIMIT** 

**SUBCLAUSE §15.247(a) (2)** 


The minimum 6dB bandwith shall shall be at least 500 KHz



#### SPECTRUM BANDWITH OF DSSS-SYSTEM

SUBCLAUSE § 15.247 (a)(2)

High Channel: 2462 MHz

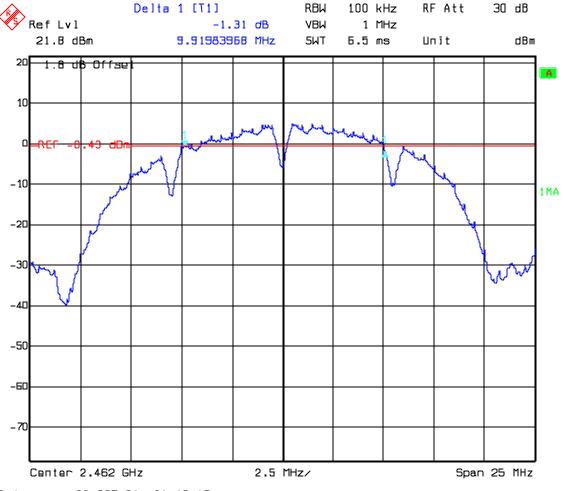

Date: 23.0CT.01 21:16:17

**LIMIT** 

**SUBCLAUSE §15.247(a) (2)** 

The minimum 6dB bandwith shall shall be at least 500 KHz



MAXIMUM PEAK OUTPUT POWER (CONDUCTED)

**SUBCLAUSE § 15.247 (b) (1)** 

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (dBm)					
Frequency (MHz)			2412		2437		2462
T <sub>nom</sub> (23)°C	V <sub>nom</sub> (3.3)V	Pk	17.74	Pk	18.91	Pk	19.67
		Av	10.60	Av	12.06	Av	12.65
Measurement uncertainty				•	±3dB		

**LIMIT** 

**SUBCLAUSE § 15.247 (b) (1)** 


Frequency range	RF power output
2400-2483.5 MHz / 5725 – 5850 MHz	1.0 Watt



# MAXIMUM PEAK OUTPUT POWER (CONDUCTED)

**SUBCLAUSE § 15.247 (b) (1)** 

Low Channel: 2412 MHz

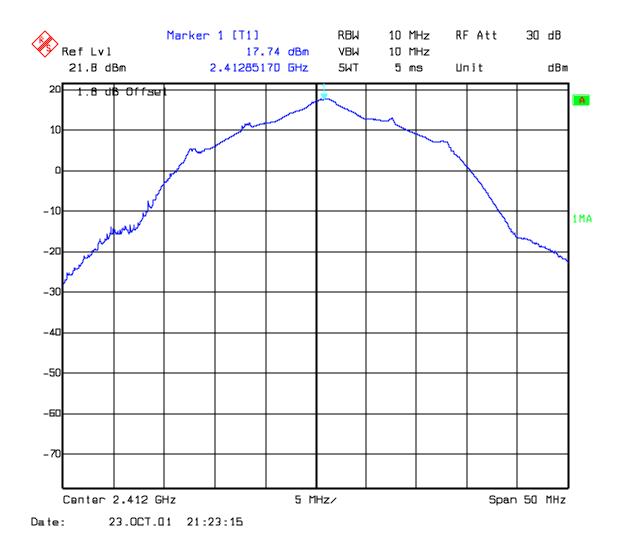




### MAXIMUM PEAK OUTPUT POWER

**SUBCLAUSE § 15.247 (b) (1)** 

(CONDUCTED)
Mid Channel: 2437 MHz

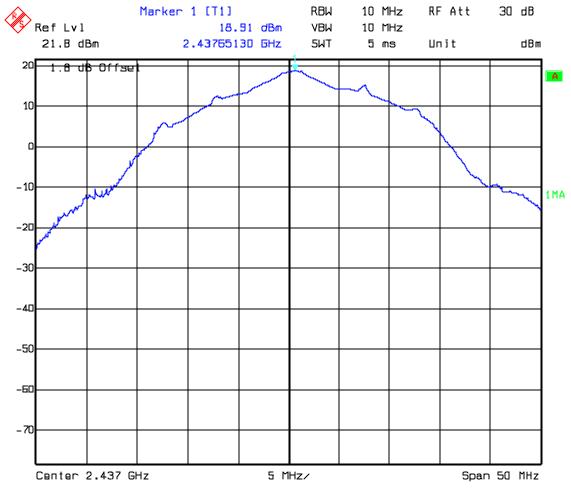


Date: 23.0CT.01 21:21:49



### MAXIMUM PEAK OUTPUT POWER

**SUBCLAUSE § 15.247 (b) (1)** 

(CONDUCTED) High Channel: 2462 MHz

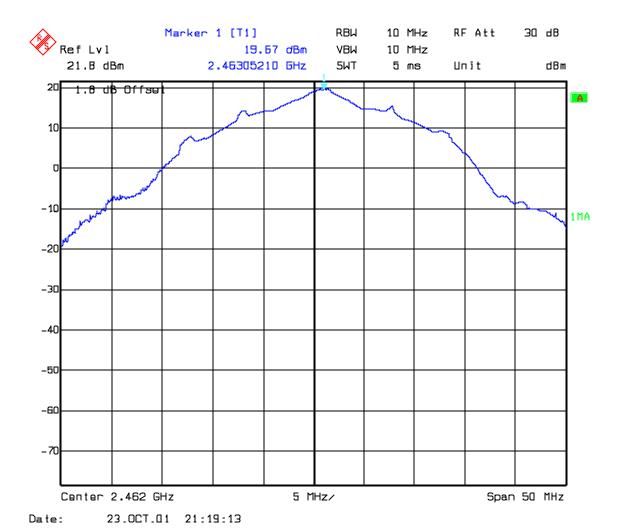



MAXIMUM PEAK OUTPUT POWER (EIRP) SUBCLAUSE § 15.247 (b) (1) (RADIATED)

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (dBm)			
Frequency (MHz)		2412	2437	2462	
T <sub>nom</sub> (23)°C	$V_{nom}(3.3)V$	16.69	16.49	16.74	
Measurement uncertainty			±3dB	l	

**LIMIT SUBCLAUSE § 15.247 (b) (1)** 

Frequency range	RF power output	
2400-2483.5 MHz / 5725 – 5850 MHz	1.0 Watt	




MAXIMUM PEAK OUTPUT POWER (EIRP)

**SUBCLAUSE § 15.247 (b) (1)** 

(RADIATED)

Low Channel: 2412 MHz

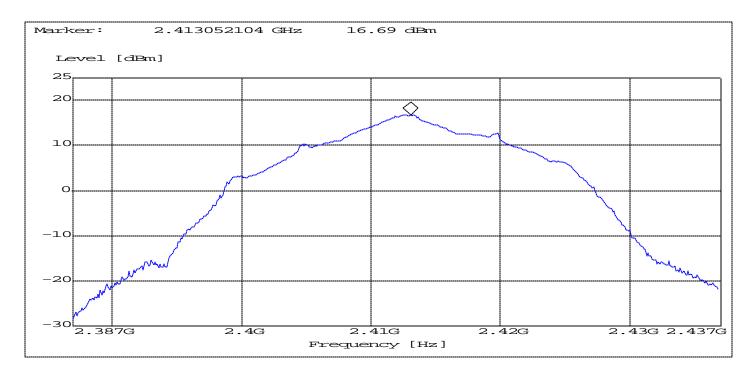




MAXIMUM PEAK OUTPUT POWER (EIRP)

**SUBCLAUSE § 15.247 (b) (1)** 

(RADIATED)

Mid Channel: 2437 MHz

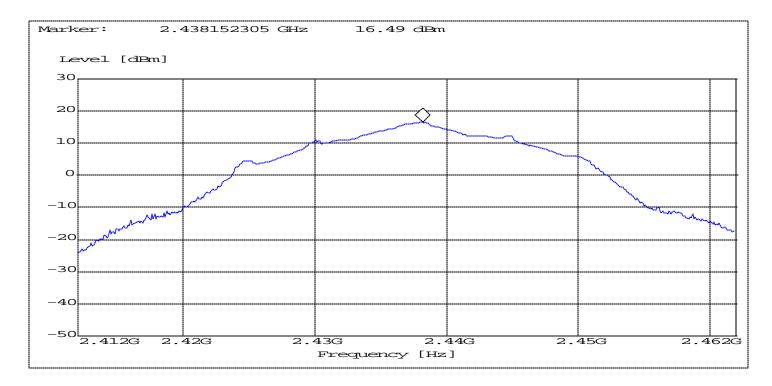




MAXIMUM PEAK OUTPUT POWER (EIRP)

**SUBCLAUSE § 15.247 (b) (1)** 

(RADIATED)

High Channel: 2462 MHz

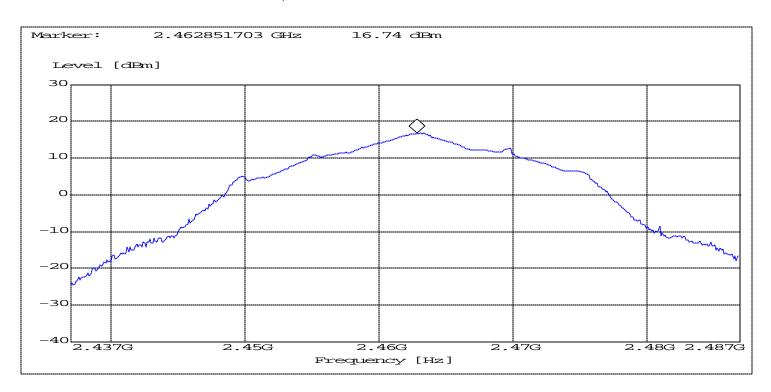



**EMISSION LIMITATIONS - Conducted (Transmitter)** 

§ 15.247 (c) (1)

#### **LIMITS**

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

<u>NOTE</u>: Frequency resolution is not fine enough to show the exact frequency of the carrier, refer to plots under EIRP.




**EMISSION LIMITATIONS (Transmitter)** 

**SUBCLAUSE § 15.247 (c) (1)** 

**Conducted** 

Low Channel (2412 MHz): 30MHz - 4GHz

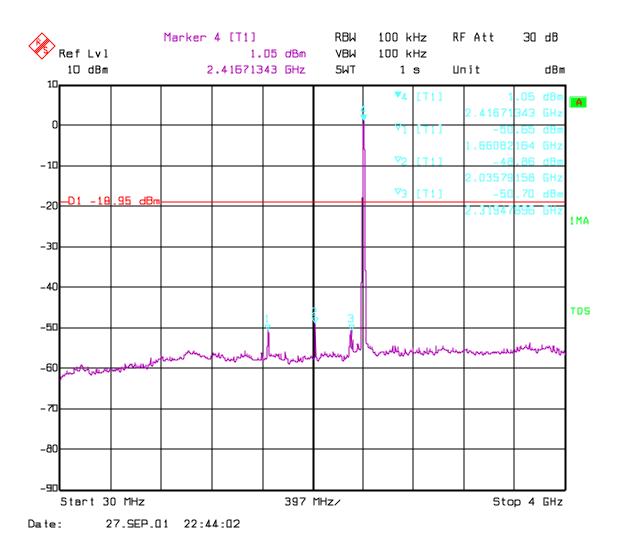




### **EMISSION LIMITATIONS (Transmitter)**

**SUBCLAUSE § 15.247 (c) (1)** 

conducted

Low Channel (2412 MHz): 2GHz - 25GHz

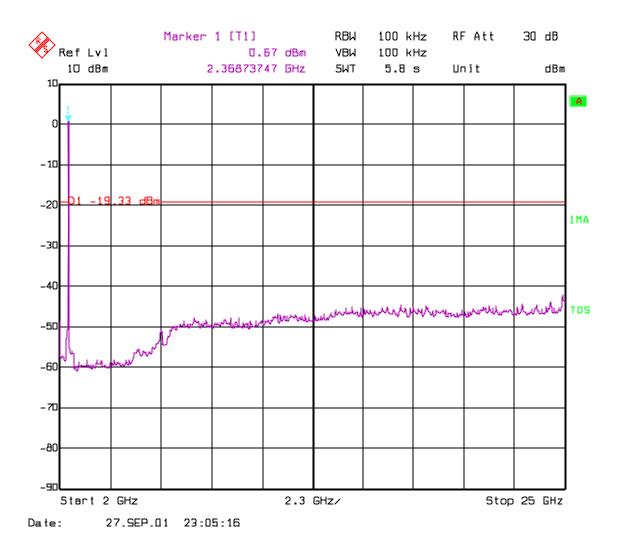




**EMISSION LIMITATIONS (Transmitter)** 

**SUBCLAUSE § 15.247 (c) (1)** 

conducted

Mid Channel (2437 MHz): 30MHz - 4GHz

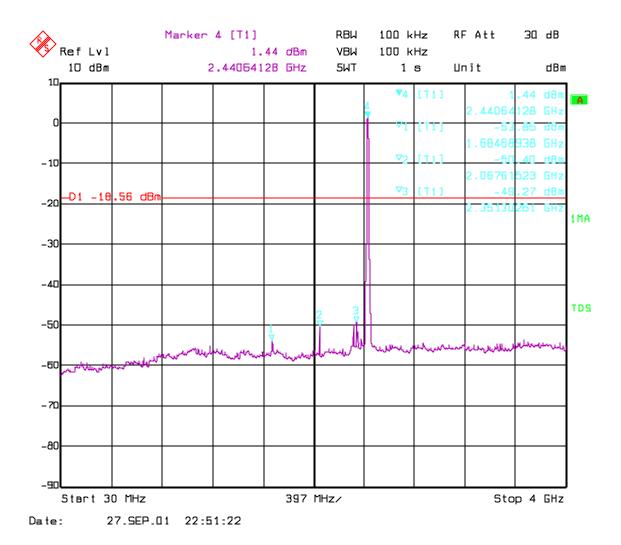




### **EMISSION LIMITATIONS (Transmitter)**

**SUBCLAUSE § 15.247 (c) (1)** 

**Conducted** 

Mid Channel (2437 MHz): 2GHz - 25GHz

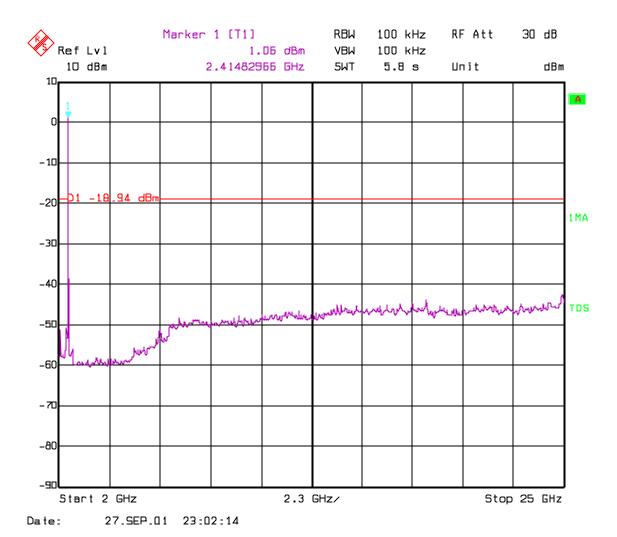




### **EMISSION LIMITATIONS (Transmitter)**

**SUBCLAUSE § 15.247 (c) (1)** 

#### conducted

High Channel (2462 MHz): 30MHz - 4GHz

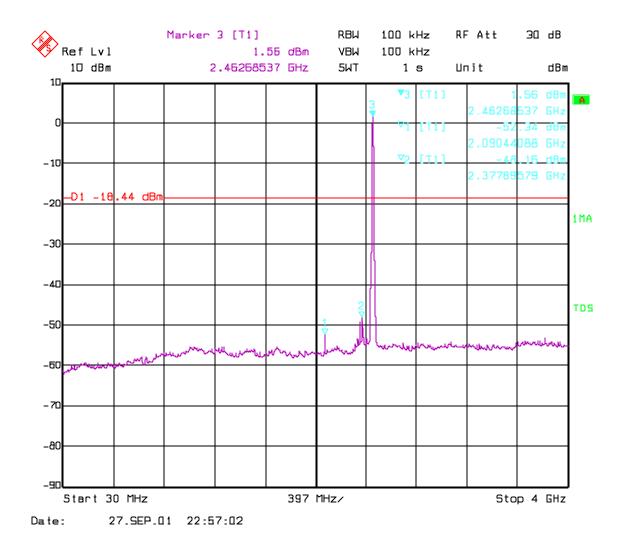




### **EMISSION LIMITATIONS (Transmitter)**

**SUBCLAUSE § 15.247 (c) (1)** 

**Conducted** 

High Channel (2462 MHz): 2GHz - 25GHz

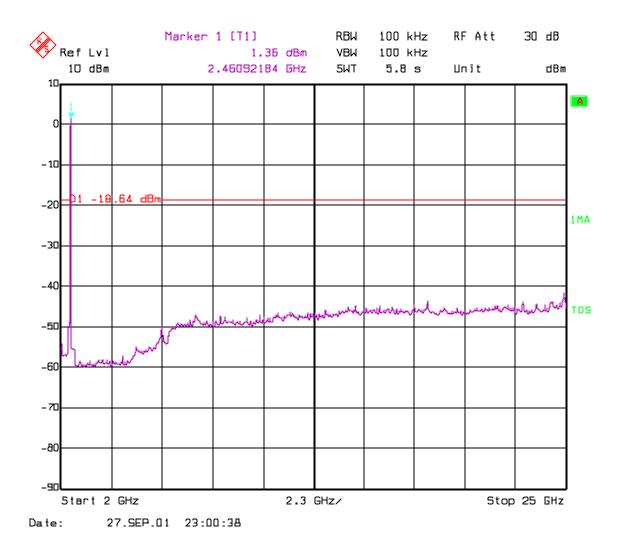




**EMISSION LIMITATIONS (Transmitter)** 


**SUBCLAUSE § 15.247 (c) (2)** 

spurious in the restricted band  $2483.5 - 2500 \ MHz$ <u>Higher Band Edge</u>

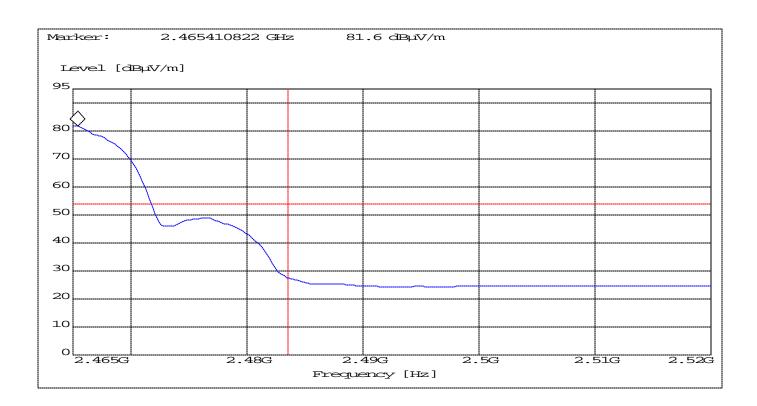



### **Lower Band Edge**

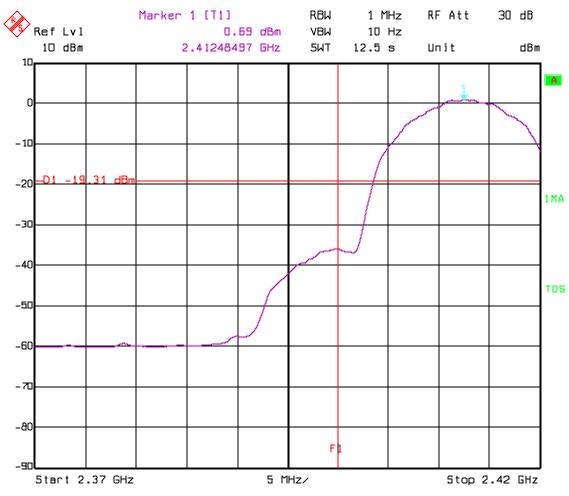

Date: 27.SEP.01 23:20:39



**EMISSION LIMITATIONS - Radiated (Transmitter)** 

**SUBCLAUSE § 15.247 (c) (1)** 

#### **LIMITS**

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

#### NOTE:

- 1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 18 and 25 GHz very short cable connections to the antenna was used to minimize the noise level.
- 2. Frequency resolution is not fine enough to show the exact frequency of the carrier, refer to plots under EIRP.
- 3. All emission measurements were done in Peak mode. In case limits are exceeded the measurements will be repeated and documented in the test report either with Quasi Peak or average detector depending on the frequency range specified in FCC 15 and/or DA00-705. Bandwidth, sweeptime etc. were set according DA00-705 and recorded

Results for the radiated measurements below 30MHz according § 15.33

Frequency	Measured values	Remarks
10KHz – 30MHz	No emissions found, caused by the EUT	This is valid for all the tested
TUKHZ — SUMHZ		channels




**EMISSION LIMITATIONS (Transmitter)** 

**SUBCLAUSE § 15.247 (c) (1)** 

Radiated

Low Channel(2412MHz): 30MHz-1GHz

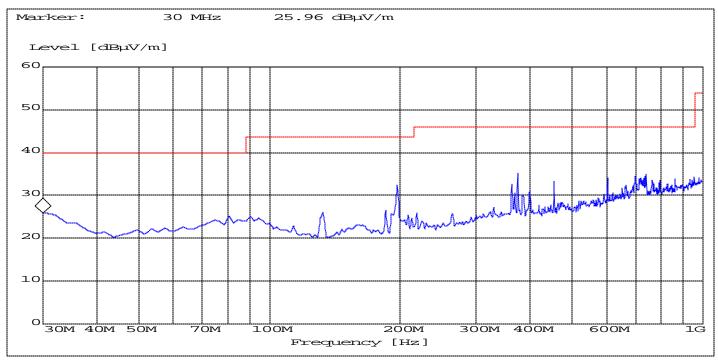

ANALYZER SETTINGS: f < 1 GHz : RBW/VBW: 100 kHz


f 3 1GHz: RBW/VBW: 1 MHz



EMISSION LIMITATIONS (Transmitter) SUBCLAUSE § 15.247 (c) (1) Radiated

Low Channel(2412MHz): 1GHz-8GHz

#### NOTE: The peak above the limit line is the carrier frequency.

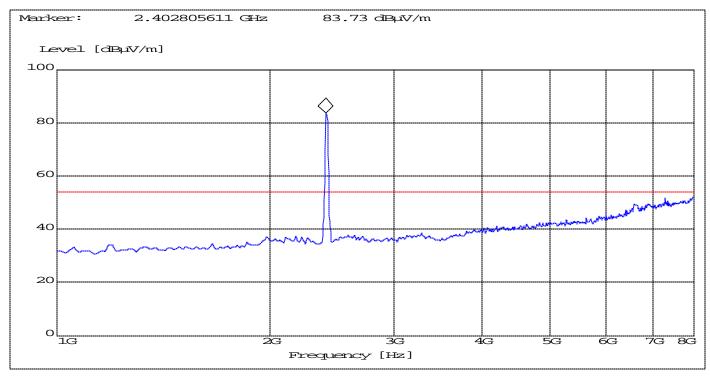




EMISSION LIMITATIONS (Transmitter) SUBCLAUSE § 15.247 (c) (1)

Radiated

Mid Channel(2437MHz): 30MHz-1GHz

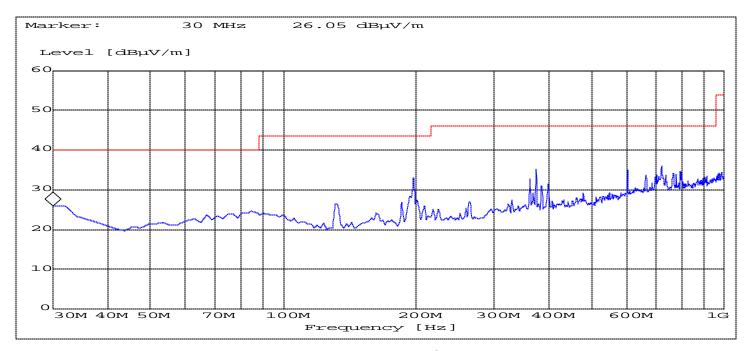




EMISSION LIMITATIONS (Transmitter) SUBCLAUSE § 15.247 (c) (1) Radiated

Mid Channel(2437MHz): 1GHz-8GHz

#### NOTE: The peak above the limit line is the carrier frequency.

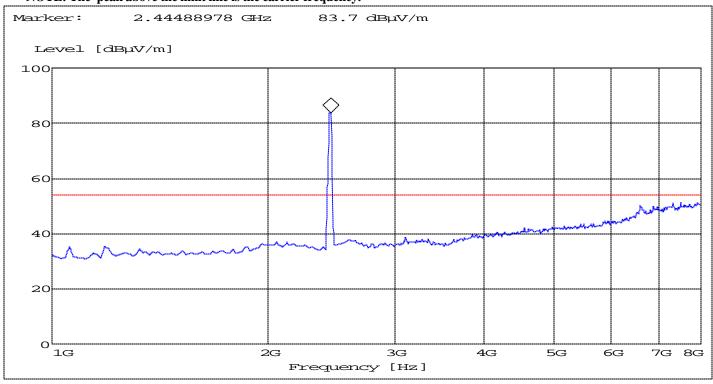




EMISSION LIMITATIONS (Transmitter) SUBCLAUSE § 15.247 (c) (1)

Radiated

Hihg Channel(2462MHz): 30MHz-1GHz

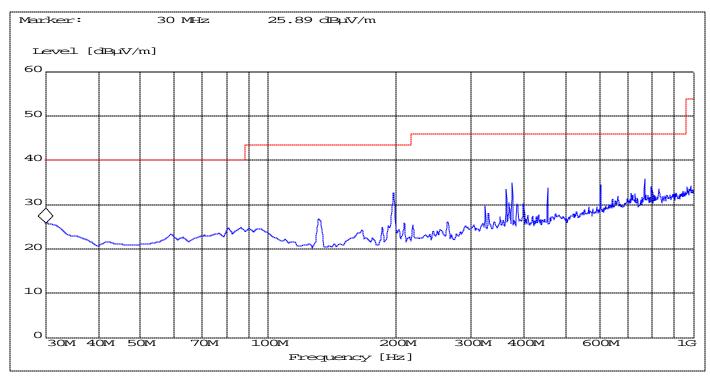

ANALYZER SETTINGS: f < 1 GHz: RBW/VBW: 100 kHz f 3 10


f 3 1GHz: RBW/VBW: 1 MHz



EMISSION LIMITATIONS (Transmitter) SUBCLAUSE § 15.247 (c) (1) Radiated

High Channel(2462MHz): 1GHz-8GHz

NOTE: The peak above the limit line is the carrier frequency.

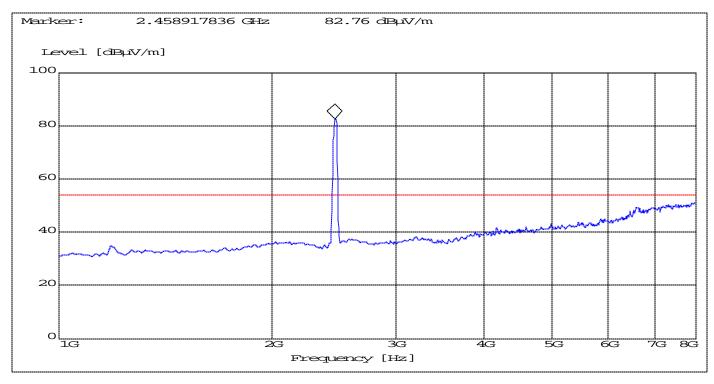




EMISSION LIMITATIONS (Transmitter) SUBCLAUSE § 15.247 (c) (1) Radiated

8GHz-18GHz

(This plot is valid for all three channels)

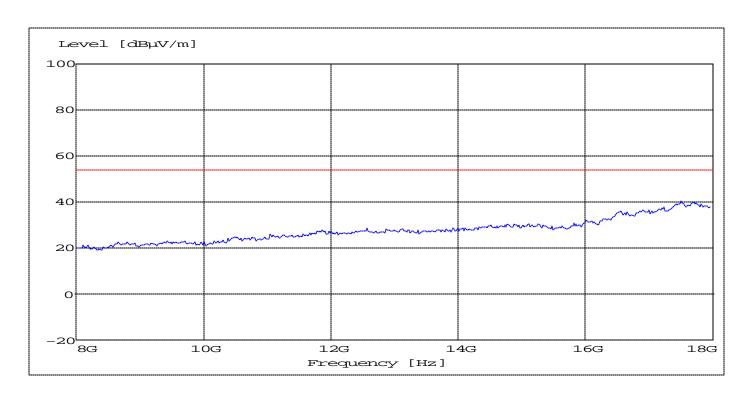




EMISSION LIMITATIONS (Transmitter) SUBCLAUSE § 15.247 (c) (1) Radiated

18GHz-25GHz

(This plot is valid for all three channels)

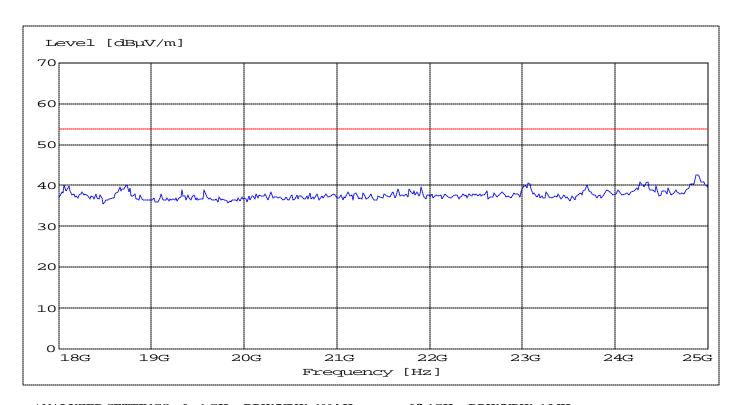

ANALYZER SETTINGS: f < 1 GHz: RBW/VBW: 100 kHz  $f^3 1 \text{GHz}$ : RBW/VBW: 1 MHz



**POWER SPECTRAL DENSITY** 

**SUBCLAUSE § 15.247 (d)** 

TEST CONDITIONS		RF POWER LEVEL IN 3 kHz BW		
Frequency (MHz)		2412	2437	2462
T <sub>nom</sub> (23)°C	$V_{nom}(3.3)V$	-12.95 dBm	-12.35dBm	-12.28 dBm
Measurement uncertainty		±3dB		

**LIMIT** 

**SUBCLAUSE §15.247(d)** 

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band


ANALYZER SETTINGS: RBW=3KHz, VBW=3KHz



### POWER SPECTRAL DENSITY

**SUBCLAUSE § 15.247 (d)** 

Low Channel: 2412 MHz

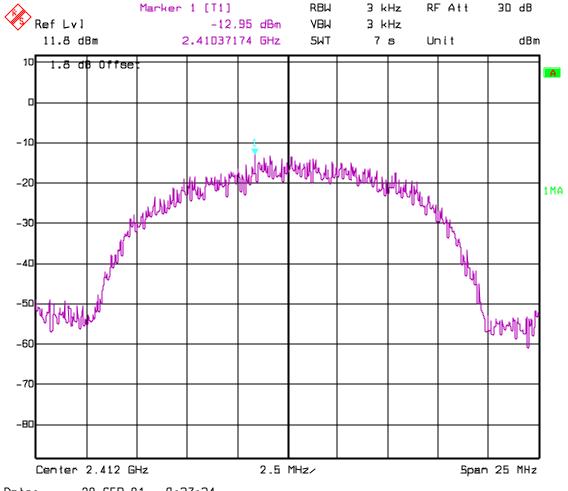


Date: 28.SEP.01 0:37:34



### POWER SPECTRAL DENSITY

**SUBCLAUSE § 15.247 (d)** 

Mid Channel: 2437 MHz

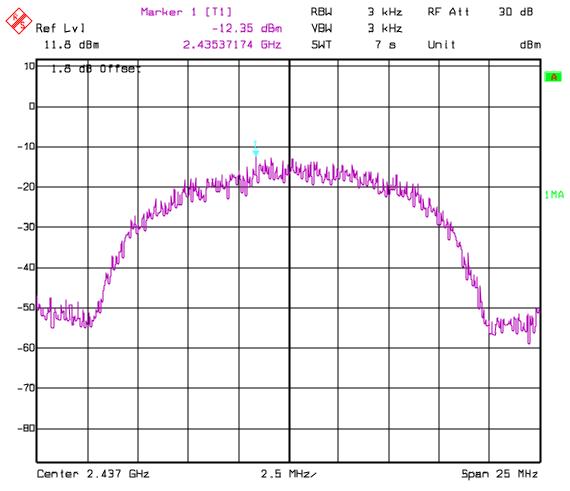

Date: 28.SEP.01 0:38:45




Test report no.: 173FCC/2001\_2WLAN Issued date:2001-10-25 Page 40 (48)

### POWER SPECTRAL DENSITY

**SUBCLAUSE § 15.247 (d)** 

**High Channel: 2462 MHz** 

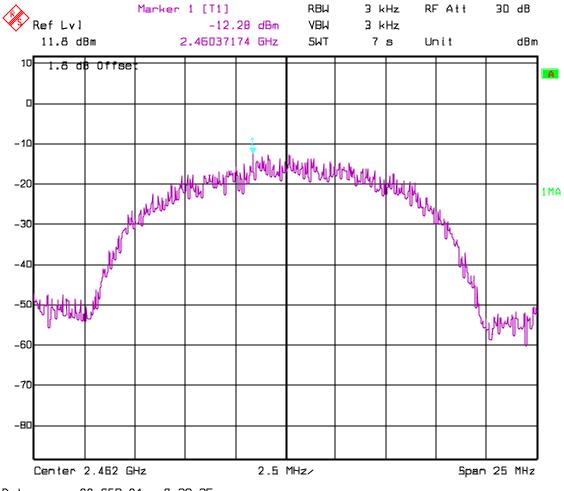

Date: 28.SEP.01 0:39:35




### **CONDUCTED EMISSIONS**

§ 15.107/207

Measured with AC/DC power adapter plugged in LISN

**Phase: Line** 

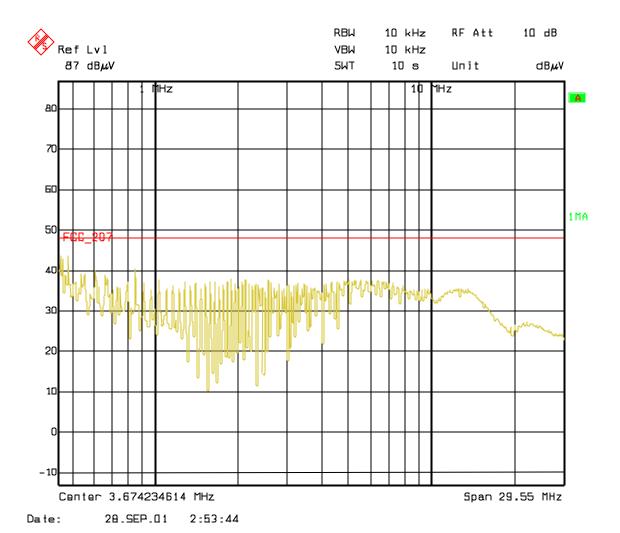

Technical specification : 15.107 / 15.207 (Revised as of October 1, 1991 )  $\overline{\phantom{a}}$ 


Limit

0.45 to 30 MHz	250 μV / 47.96 dBμV
0.15 to 50 WHZ	230 μ 7 17.50 αΒμ 7

\_



**Phase: Neutral** 

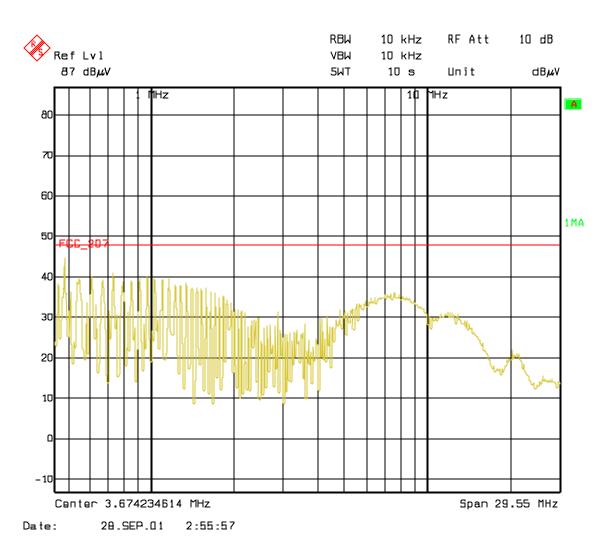

 $Technical\ specification: 15.107\ /\ 15.207\ (Revised\ as\ of\ October\ 1,\ 1991\ )$ 

Limit

0.45 to 30 MHz	250 μV / 47.96 dBμV
----------------	---------------------

\_



### RECEIVER SPURIOUS RADIATION

§ 15.209

#### Limits

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

### **NOTE:**


- 1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 18 and 25 GHz very short cable connections to the antenna was used to minimize the noise level.
- 2. Measurements were done on low, mid & high channels, but plots depicting the worst case are submitted in the test report.
- 3. All emission measurements were done in Peak mode. In case limits are exceeded the measurements will be repeated and documented in the test report either with Quasi Peak or average detector depending on the frequency range specified in FCC 15 and/or DA00-705. Bandwidth, sweeptime etc. were set according DA00-705 and recorded



### RECEIVER SPURIOUS RADIATION

§ 15.209

30MHz – 1GHz (This plot is valid for all three channels)

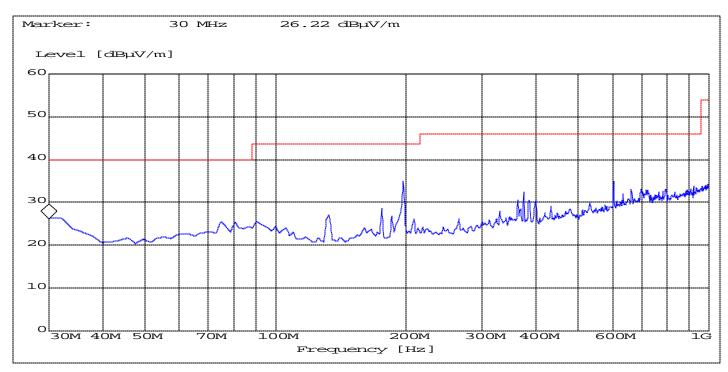

ANALYZER SETTINGS: f < 1 GHz : RBW/VBW: 100 kHz


f 3 1GHz: RBW/VBW: 1 MHz



### RECEIVER SPURIOUS RADIATION

§ 15.209

1GHz – 8GHz (This plot is valid for all three channels)

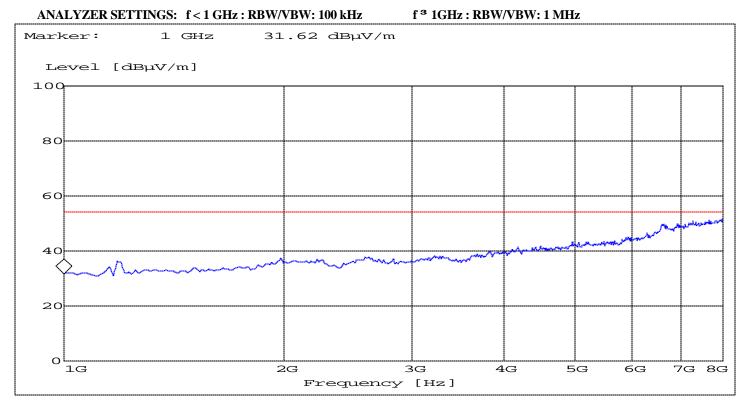




### RECEIVER SPURIOUS RADIATION

§ 15.209

**8GHz – 18GHz** 

(NOTE: This plot is valid for all three channels)

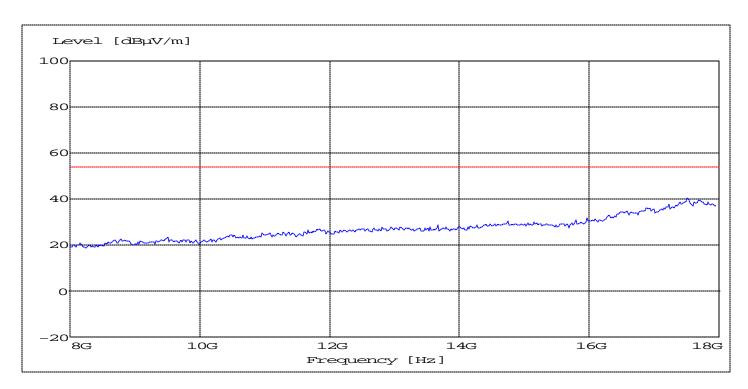

ANALYZER SETTINGS: f < 1 GHz : RBW/VBW: 100 kHz f 3 1GHz : RBW/VBW: 1 MHz




### RECEIVER SPURIOUS RADIATION

§ 15.209

18GHz - 25GHz

(NOTE: This plot is valid for all three channels)

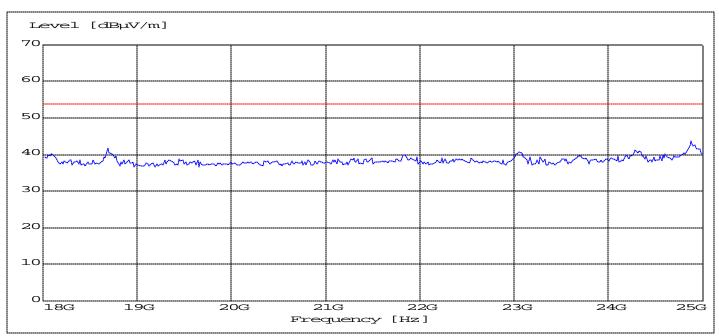

ANALYZER SETTINGS: f < 1 GHz: RBW/VBW: 100 kHz

f 3 1GHz: RBW/VBW: 1 MHz



### TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

No	Instrument/Ancillary	Туре	Manufacturer	Serial No.
01	Spectrum Analyzer	FSEM 30	Rohde & Schwarz	826880/010
02	Signal Generator	SMY0	Rohde & Schwarz	836878/011
03	Power-Meter	NRVD	Rohde & Schwarz	0857.8008.02
04	Power Amlifier	250W1000	Amplifier Research	300031
05	Biconilog Antenna	3141	EMCO	0005-1186
06	Horn Antenna	SAS-200/571	AH Systems	325
07	Power Splitter	11667B	Hewlett Packard	645348
08	Climatic Chamber	VT4004	Votch	G1115
09	Pre-Amplifier	JS4-00102600	Miteq	00616
10	Power Sensor	URV5-Z2	Rohde & Schwarz	DE30807
11	Power Sensor	URV5-Z2	Rohde & Schwarz	DE30808