



RADIO TEST REPORT

Test Report No. : 10007806H-G

Applicant : FUJITSU TEN LIMITED
Type of Equipment : Car Navigation
Model No. : FT0054A
FCC ID : BABFT0054A
Test regulation : FCC Part 15 Subpart C: 2012
*Bluetooth part
Test Result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Date of test: April 23 to May 16, 2013

Representative test engineer: S. Matsuyama
Satofumi Matsuyama
Engineer of WiSE Japan,
UL Verification Service

Approved by: T. Hatakeda
Takahiro Hatakeda
Leader of WiSE Japan,
UL Verification Service



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation. *As for the range of Accreditation in NVLAP, you may refer to the WEB address, <http://www.ul.com/japan/jpn/pages/services/emc/about/mark1/index.jsp#nvlap>

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

13-EM-F0429

REVISION HISTORY

Original Test Report No.: 10007806H-G

Revision	Test report No.	Date	Page revised	Contents
- (Original)	10007806H-G	June 21, 2013	-	-

CONTENTS	PAGE
SECTION 1: Customer information.....	4
SECTION 2: Equipment under test (E.U.T.).....	4
SECTION 3: Test specification, procedures & results.....	5
SECTION 4: Operation of E.U.T. during testing.....	9
SECTION 5: Radiated Spurious Emission	12
SECTION 6: Antenna Terminal Conducted Tests.....	13
APPENDIX 1: Data of EMI test.....	14
20dB Bandwidth and Carrier Frequency Separation.....	14
Number of Hopping Frequency	17
Dwell time.....	19
Maximum Peak Output Power.....	22
Radiated Spurious Emission	23
Conducted Spurious Emission	32
Conducted Emission Band Edge compliance	44
99%Occupied Bandwidth	46
APPENDIX 2: Test instruments	48
APPENDIX 3: Photographs of test setup	49
Radiated Spurious Emission	49

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 1: Customer information

Company Name : FUJITSU TEN LIMITED
Address : 2-28, Goshō-dori 1-Chome, Hyogo-ku, Kobe, 652-8510 JAPAN
Telephone Number : +81-78-682-2159
Facsimile Number : +81-78-671-7160
Contact Person : YO SHOTATSU

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : Car Navigation
Model No. : FT0054A
Serial No. : Refer to Section 4, Clause 4.2
Rating : DC 12.0V
Rated range : DC 10.5 to 16.0V
Receipt Date of Sample : April 20, 2013
Country of Mass-production : Mexico
Condition of EUT : Production prototype
(Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT : No Modification by the test lab

2.2 Product Description

General Specification

Clock frequency(ies) in the system : 792MHz

Radio Specification

[WLAN (IEEE802.11b/g/n-20)]

Radio Type : Transceiver
Frequency of Operation : 2412-2462MHz
Modulation : DSSS
Power Supply (radio part input) : DC 3.3V
Antenna type : Inverted F type Antenna
Antenna Gain : 0.49dBi

[Bluetooth (Ver. 3.0 with EDR function)]

Radio Type : Transceiver
Frequency of Operation : 2402-2480MHz
Modulation : FHSS
Power Supply (radio part input) : DC 3.3V
Antenna type : Inverted F type Antenna
Antenna Gain : 1.23dBi

[GPS]

Radio Type : Receiver
Frequency of Operation : 1575.42MHz
Modulation : CDMA
Power Supply (radio part input) : DC 4.5V
Antenna type : Dome Antenna
Antenna Gain : 26.5dBi

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8999
Facsimile : +81 596 24 8124

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : Test specification: FCC Part 15 Subpart C: 2012, final revised on December 27, 2012 and effective January 28, 2013

Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.207 Conducted limits
Section 15.247 Operation within the bands 902-928MHz,
2400-2483.5MHz, and 5725-5850MHz

*The EUT complies with FCC Part 15 Subpart B: 2012, final revised on December 27, 2012 and effective January 28, 2013.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

3.2 Procedures and results

Item	Test Procedure	Specification	Worst Margin	Results	Remarks
Conducted Emission	FCC: ANSI C63.4:2003 7. AC powerline conducted emission measurements IC: RSS-Gen 7.2.4	FCC: Section 15.207 ----- IC: RSS-Gen 7.2.4	N/A	N/A *1)	-
Carrier Frequency Separation	FCC: FCC Public Notice DA 00-705 ----- IC: -	FCC: Section 15.247(a)(1) ----- IC: RSS-210 A8.1 (b)	See data.	Complied	Conducted
20dB Bandwidth	FCC: FCC Public Notice DA 00-705 ----- IC: -	FCC: Section 15.247(a)(1) ----- IC: RSS-210 A8.1 (a)		Complied	Conducted
Number of Hopping Frequency	FCC: FCC Public Notice DA 00-705 ----- IC: -	FCC: Section 15.247(a)(1)(iii) ----- IC: RSS-210 A8.1 (d)		Complied	Conducted
Dwell time	FCC: FCC Public Notice DA 00-705 ----- IC: -	FCC: Section 15.247(a)(1)(iii) ----- IC: RSS-210 A8.1 (d)		Complied	Conducted
Maximum Peak Output Power	FCC: FCC Public Notice DA 00-705 ----- IC: RSS-Gen 4.8	FCC: Section 15.247(a)(b)(1) ----- IC: RSS-210 A8.4 (2)		Complied	Conducted
Spurious Emission & Band Edge Compliance	FCC: FCC Public Notice DA 00-705 ----- IC: RSS-Gen 4.9	FCC: Section 15.247(d) ----- IC: RSS-210 A8.5 RSS-Gen 6 and 7.2.3		1.3dB 40.000MHz, QP, Vert.	Complied

Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.

*1) The test is not applicable since the EUT is not the device that is designed to be connected to the public utility (AC) power line.

* In case any questions arise about test procedure, ANSI C63.4: 2003 is also referred.

FCC 15.31 (e)

The EUT is a battery-operated device and test was performed with the full-charged battery. Therefore, this EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

3.3 Addition to standard

Item	Test Procedure	Specification	Worst margin	Results	Remarks
99% Occupied Bandwidth	IC: RSS-Gen 4.6.1	IC: RSS-Gen 4.6.1	N/A	-	Conducted

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

EMI

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

Test room (semi-anechoic chamber)	Radiated emission						
	(3m*)(+dB)				(1m*)(+dB)		(0.5m*)(+dB)
	9kHz -30MHz	30MHz -300MHz	300MHz -1GHz	1GHz -10GHz	10GHz -18GHz	18GHz -26.5GHz	26.5GHz -40GHz
No.1	4.3dB	5.0dB	5.1dB	4.9dB	5.8dB	4.4dB	4.3dB
No.2	4.3dB	5.2dB	5.1dB	5.0dB	5.7dB	4.3dB	4.2dB
No.3	4.6dB	5.0dB	5.1dB	5.0dB	5.7dB	4.5dB	4.2dB
No.4	4.8dB	5.2dB	5.0dB	5.0dB	5.7dB	5.2dB	4.2dB

*3m/1m/0.5m = Measurement distance

Power meter (+dB)	
Below 1GHz	Above 1GHz
0.7dB	1.5dB

Antenna terminal conducted emission and Power density (+dB)			Antenna terminal conducted emission (+dB)		Channel power (+dB)
Below 1GHz	1GHz-3GHz	3GHz-18GHz	18GHz-26.5GHz	26.5GHz-40GHz	
1.5dB	1.7dB	2.8dB	2.8dB	2.9dB	2.6dB

Radiated emission test(3m)

The data listed in this report meets the limits unless the uncertainty is taken into consideration.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

3.5 Test Location

UL Japan, Inc. Head Office EMC Lab. *NVLAP Lab. code: 200572-0
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8999 Facsimile : +81 596 24 8124

	FCC Registration Number	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms
No.1 semi-anechoic chamber	313583	2973C-1	19.2 x 11.2 x 7.7m	7.0 x 6.0m	No.1 Power source room
No.2 semi-anechoic chamber	655103	2973C-2	7.5 x 5.8 x 5.2m	4.0 x 4.0m	-
No.3 semi-anechoic chamber	148738	2973C-3	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.3 Preparation room
No.3 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.4 semi-anechoic chamber	134570	2973C-4	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.4 Preparation room
No.4 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.5 semi-anechoic chamber	-	-	6.0 x 6.0 x 3.9m	6.0 x 6.0m	-
No.6 shielded room	-	-	4.0 x 4.5 x 2.7m	4.75 x 5.4 m	-
No.6 measurement room	-	-	4.75 x 5.4 x 3.0m	4.75 x 4.15 m	-
No.7 shielded room	-	-	4.7 x 7.5 x 2.7m	4.7 x 7.5m	-
No.8 measurement room	-	-	3.1 x 5.0 x 2.7m	N/A	-
No.9 measurement room	-	-	8.0 x 4.5 x 2.8m	2.0 x 2.0m	-
No.10 measurement room	-	-	2.6 x 2.8 x 2.5m	2.4 x 2.4m	-
No.11 measurement room	-	-	3.1 x 3.4 x 3.0m	2.4 x 3.4m	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

3.6 Data of EMI, Test instruments, and Test set up

Refer to APPENDIX.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 4: Operation of E.U.T. during testing

4.1 Operating Mode(s)

Bluetooth (BT): Transmitting (Tx), Payload: PRBS9
*EUT does not have Inquiry mode.

Details of Operating Mode(s)

Test Item	Mode	Tested frequency
20dB Bandwidth Maximum Peak Output Power Spurious Emission (Conducted/Radiated)	Tx (Hopping off) DH5, 3DH5	2402MHz 2441MHz 2480MHz
Carrier Frequency Separation	Tx (Hopping on) DH5, 3DH5	2402MHz 2441MHz 2480MHz
Number of Hopping Frequency	Tx (Hopping on) DH5, 3DH5	-
Dwell time	Tx (Hopping on), -DH1, DH3, DH5 -3DH1, 3DH3, 3DH5	-
Band Edge Compliance (Conducted)	Tx DH5, 3DH5 -Hopping on -Hopping off	2402MHz 2480MHz
99% Occupied Bandwidth	Tx DH5, 3DH5 -Hopping on -Hopping off	2402MHz 2441MHz 2480MHz
<p>*As a result of preliminary test, the formal test was performed with the above modes, which had the maximum payload length (except Dwell time test) *EUT has the power settings by the software as follows; Power settings: Same as production model Software: Diag. mode(BT Certification mode) *This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.</p>		

UL Japan, Inc.


Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

4.2 Configuration and peripherals

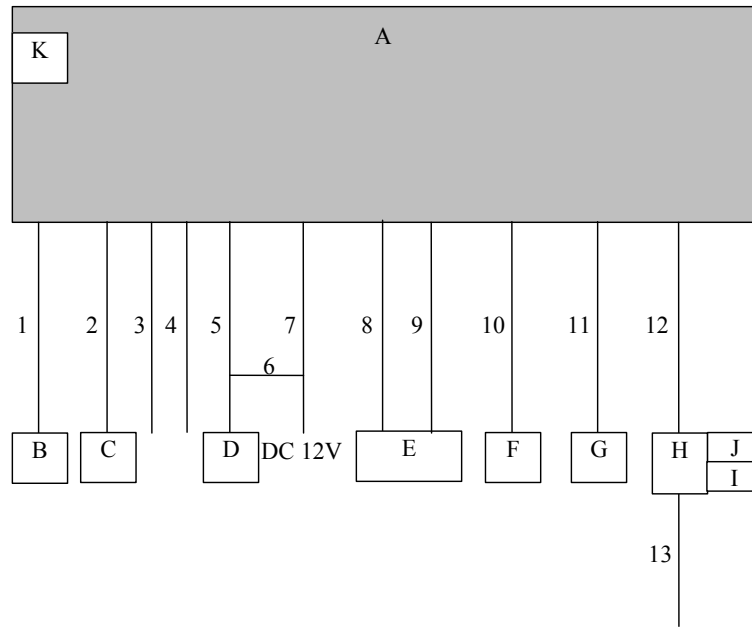

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Car Navigation	FT0054A	22 *1) 21 *2)	FUJITSU TEN	EUT
B	GPS Antenna	86277AJ411	11310004	FUJITSU TEN	-
C	75Ω Dummy load	-	-	-	-
D	Mic	-	-	FUJITSU TEN	-
E	Dummy load	-	-	-	-
F	75Ω Dummy load	-	-	-	-
G	Camera	-	-	FUJITSU TEN	-
H	USB connector box	-	-	-	-
I	USB memory	MB-RUF2-4GB	3	BUFFALO	-
J	USB memory	MB-RUF2-4GB	4	BUFFALO	-
K	MicroSD Card	-	-	Panasonic	-

*1) Used for Spurious Emission (Radiated) test only

*2) Used for all tests except for Spurious Emission (Radiated) test

List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	Signal Cable	3.0	Shielded	Shielded	-
2	Signal Cable	5.2	Unshielded	Unshielded	-
3	Signal Cable	3.0	Unshielded	Unshielded	-
4	Signal Cable	3.0	Unshielded	Unshielded	-
5	Signal Cable	3.2	Unshielded	Unshielded	-
6	Signal Cable	1.3	Unshielded	Unshielded	-
7	DC Cable	4.0	Unshielded	Unshielded	-
8	Audio Cable	3.3	Unshielded	Unshielded	-
9	Audio Cable	3.3	Unshielded	Unshielded	-
10	Audio Cable	1.7	Unshielded	Unshielded	-
11	Signal Cable	12.0	Shielded	Shielded	-
12	Signal Cable	0.6	Unshielded	Unshielded	-
13	Signal Cable	1.5	Unshielded	Unshielded	-

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 5: Radiated Spurious Emission

Test Procedure

EUT was placed on a urethane platform of nominal size, 1.0m by 1.5m, raised 0.8m above the conducting ground plane.

The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

The height of the measuring antenna varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

Test Antennas are used as below;

Frequency	30MHz to 300MHz	300MHz to 1GHz	Above 1GHz
Antenna Type	Biconical	Logperiodic	Horn

In any 100kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

20dBc was applied to the frequency over the limit of FCC 15.209 / Table 5 of RSS-Gen 7.2.5 (IC) and outside the restricted band of FCC15.205 / Table 3 of RSS-Gen 7.2.2 (IC).

Frequency	Below 1GHz	Above 1GHz		20dBc
Instrument used	Test Receiver	Spectrum Analyzer		Spectrum Analyzer
Detector	QP	PK	AV	PK
IF Bandwidth	BW 120kHz(T/R)	RBW: 1MHz VBW: 3MHz	RBW: 1MHz VBW: 10Hz *1)	RBW: 100kHz VBW: 300kHz (S/A)
Test Distance	3m	3m (below 10GHz), 1m*2) (above 10GHz)		3m (below 10GHz), 1m*2) (above 10GHz)

*1) Although 00-705 accepts VBW=10Hz for AV measurements, it was confirmed that superfluous smoothing was not performed.”

*2) Distance Factor: $20 \times \log(3.0\text{m}/1.0\text{m}) = 9.5\text{dB}$

The test was made on EUT at the normal use position.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Measurement range : 30M-26.5GHz
Test data : APPENDIX
Test result : Pass

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 6: Antenna Terminal Conducted Tests

Test Procedure

The tests were made with below setting connected to the antenna port.

Test	Span	RBW	VBW	Sweep time	Detector	Trace	Instrument used
20dB Bandwidth	3MHz	30kHz	100kHz	Auto	Peak	Max Hold	Spectrum Analyzer
99% Occupied Bandwidth	Enough width to display 20dB Bandwidth	1 to 3% of Span	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer
Maximum Peak Output Power	-	-	-	Auto	Peak/ Average *1)	-	Power Meter (Sensor: 50MHz BW)
Carrier Frequency Separation	3MHz	30kHz	100kHz	Auto	Peak	Max Hold	Spectrum Analyzer
Number of Hopping Frequency	30MHz	300kHz	1MHz	Auto	Peak	Max Hold	Spectrum Analyzer
Dwell Time	Zero Span	100kHz, 1MHz	300kHz, 3MHz	As necessary capture the entire dwell time per hopping channel	Peak	Clear Write	Spectrum Analyzer
Conducted Spurious Emission *2)	9kHz to 150kHz	200Hz	620Hz	Auto	Peak	Max Hold	Spectrum Analyzer
	150kHz to 30MHz	9.1kHz	27kHz				
	30MHz to 25GHz (Less or equal to 5GHz)	100kHz	300kHz				
Conducted Spurious Emission Band Edge compliance	10MHz	100kHz	300kHz	Auto	Peak	Max Hold	Spectrum Analyzer
*1) Reference data							
*2) In the frequency range below 30MHz, RBW was narrowed to separate the noise contents. Then, wide-band noise near the limit was checked separately, however the noise was low enough as shown in the chart (9kHz-150kHz:RBW=200Hz, 150kHz-30MHz:RBW=9.1kHz). The EUT complies with the limit of FCC15.209.							

The test results and limit are rounded off to two decimals place, so some differences might be observed.

Test data : APPENDIX
Test result : Pass

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

APPENDIX 1: Data of EMI test

20dB Bandwidth and Carrier Frequency Separation

Test place Head Office EMC Lab. No.6 Measurement Room
Report No. 10007806H
Date 04/30/2013
Temperature/ Humidity 20deg. C / 63% RH
Engineer Shinya Watanabe
Mode Tx (Hopping on) DH5/3DH5

Mode	Freq. [MHz]	20dB Bandwidth [MHz]	Carrier Frequency Separation [MHz]	Limit for Carrier Frequency separation [MHz]
DH5	2402.0	0.962	1.000	≥ 0.641
DH5	2441.0	0.959	1.000	≥ 0.639
DH5	2480.0	0.960	1.000	≥ 0.640
3DH5	2402.0	1.282	1.000	≥ 0.855
3DH5	2441.0	1.289	1.000	≥ 0.859
3DH5	2480.0	1.286	1.000	≥ 0.857

Limit: Two-thirds of 20dB Bandwidth or 25kHz (whichever is greater).
No limit applies to 20dB Bandwidth.

UL Japan, Inc.


Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

20dB Bandwidth and Carrier Frequency Separation

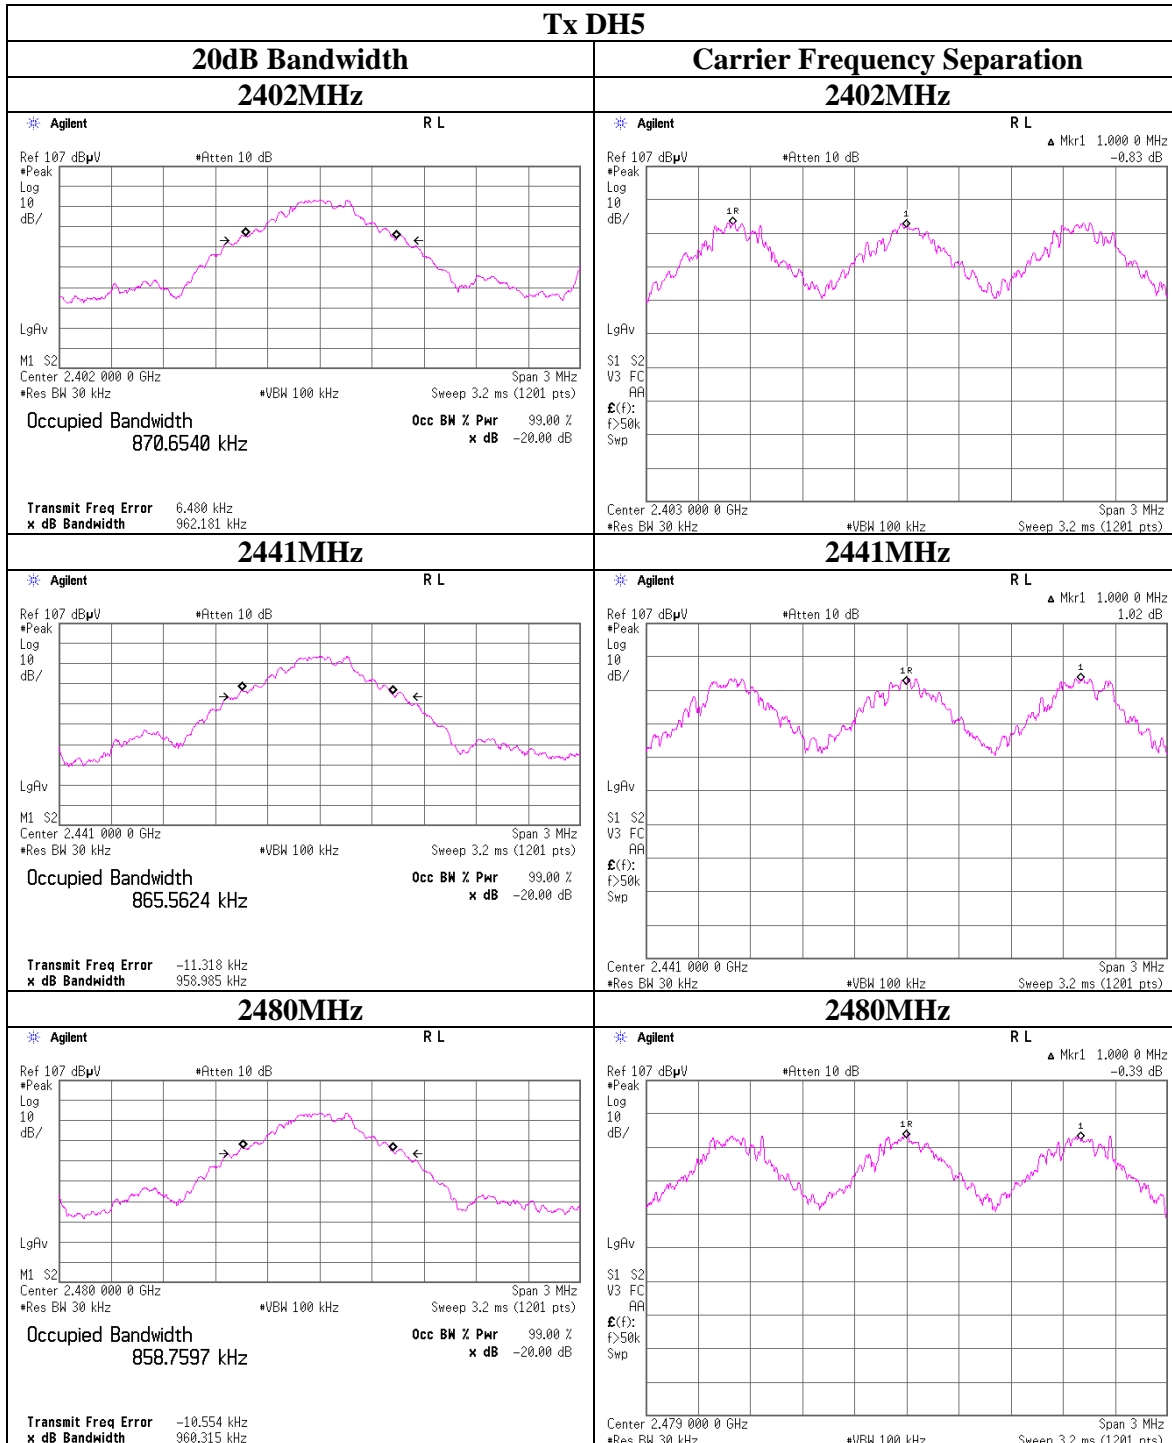

20dB Bandwidth and Carrier Frequency Separation

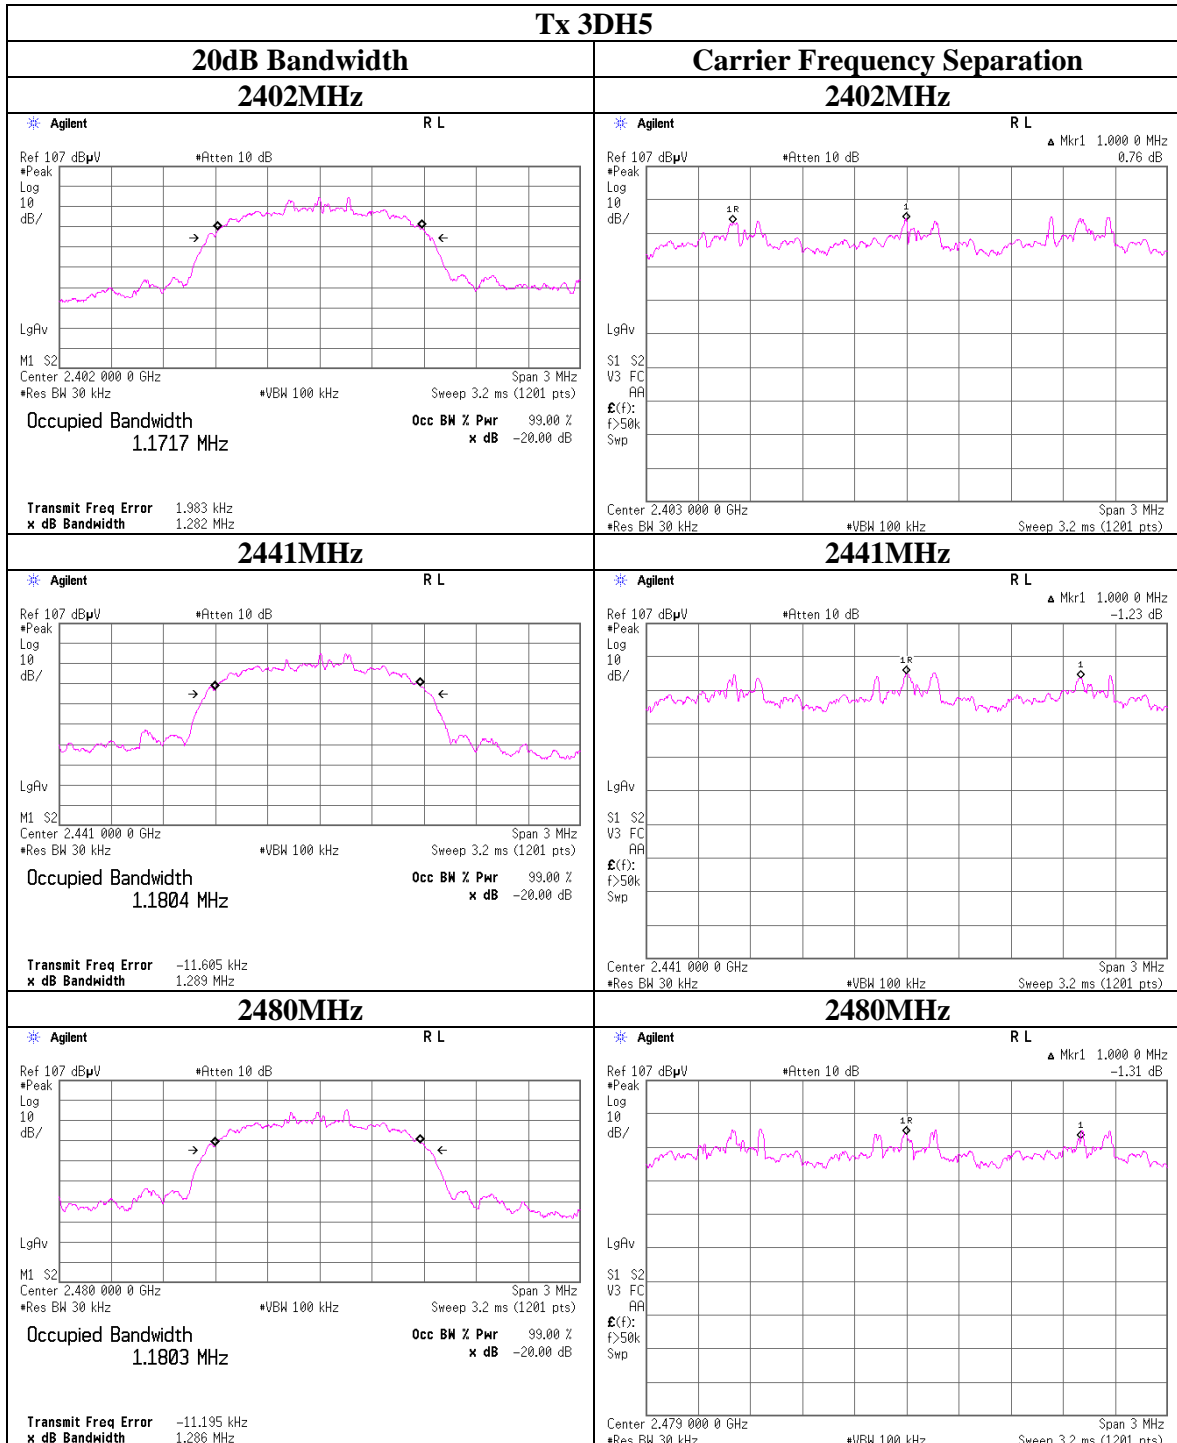


Number of Hopping Frequency

Test place Head Office EMC Lab. No.6 Measurement Room
Report No. 10007806H
Date 04/30/2013
Temperature/ Humidity 20deg. C / 63% RH
Engineer Shinya Watanabe
Mode Tx (Hopping on) DH5/3DH5

Mode	Number of channel [times]	Limit [times]
DH5	79	>= 15
3DH5	79	>= 15

Test was not performed at AFH mode whose number of hopping channel is 20 channels because this Bluetooth radio is in compliance of Bluetooth Specification.

Number of Hopping Frequency

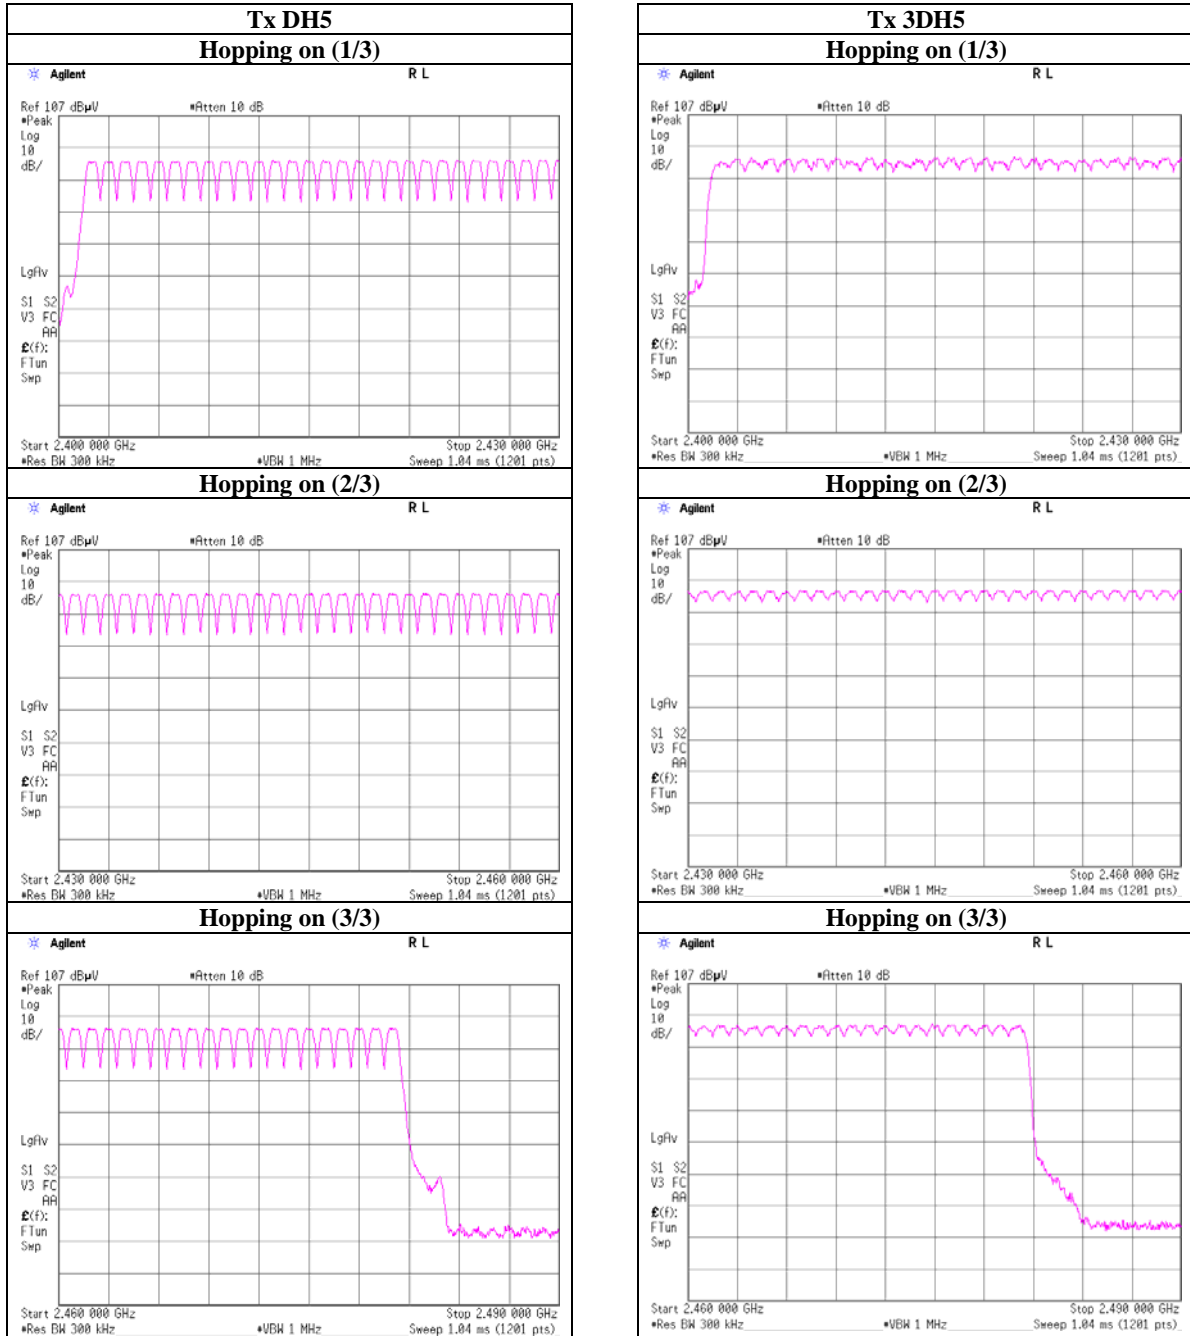

Dwell time

Test place Head Office EMC Lab. No.6 Measurement Room
Report No. 10007806H
Date 04/30/2013
Temperature/ Humidity 20deg. C / 63% RH
Engineer Shinya Watanabe
Mode Tx (Hopping on) DH5/3DH5

Mode	Number of transmission in a 31.6(79 Hopping x 0.4) / 12.8(32 Hopping x 0.4)second period			Length of transmission time [msec]	Result [msec]	Limit [msec]
DH1	51.0 times / 5 sec. x	31.6 sec. =	323 times	0.419	135	400
DH3	25.0 times / 5 sec. x	31.6 sec. =	158 times	1.517	240	400
DH5	17.0 times / 5 sec. x	31.6 sec. =	108 times	2.927	316	400
3DH1	50.0 times / 5 sec. x	31.6 sec. =	316 times	0.433	137	400
3DH3	25.0 times / 5 sec. x	31.6 sec. =	158 times	1.788	283	400
3DH5	17.0 times / 5 sec. x	31.6 sec. =	108 times	2.940	318	400

Sample Calculation

Result = Number of transmission x Length of transmission time

This device complies with the Bluetooth protocol for FHSS operation, employing a pseudo random channel selection and hopping rate to ensure that the occupancy time in $N \times 0.4s$, where N is the number of channels being used in the hopping sequence ($20 \leq N \leq 79$), is always less than $0.4s$ regardless of packet size. This is confirmed in the test report for $N=79$.

UL Japan, Inc.


Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Dwell time

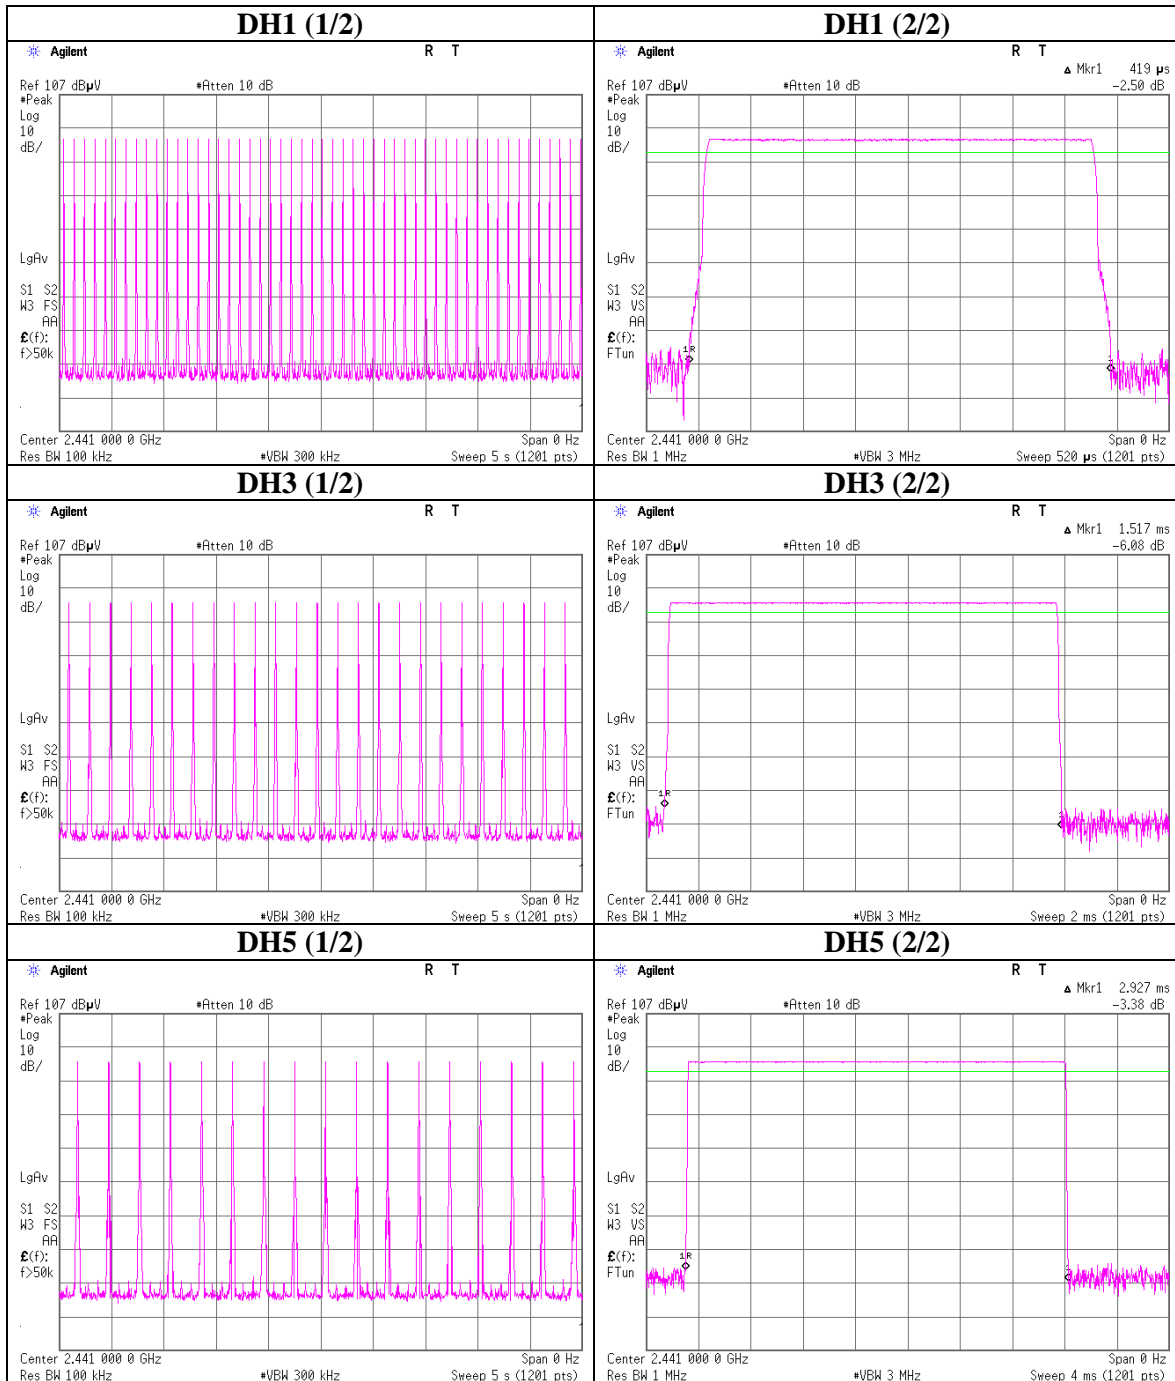

Dwell time

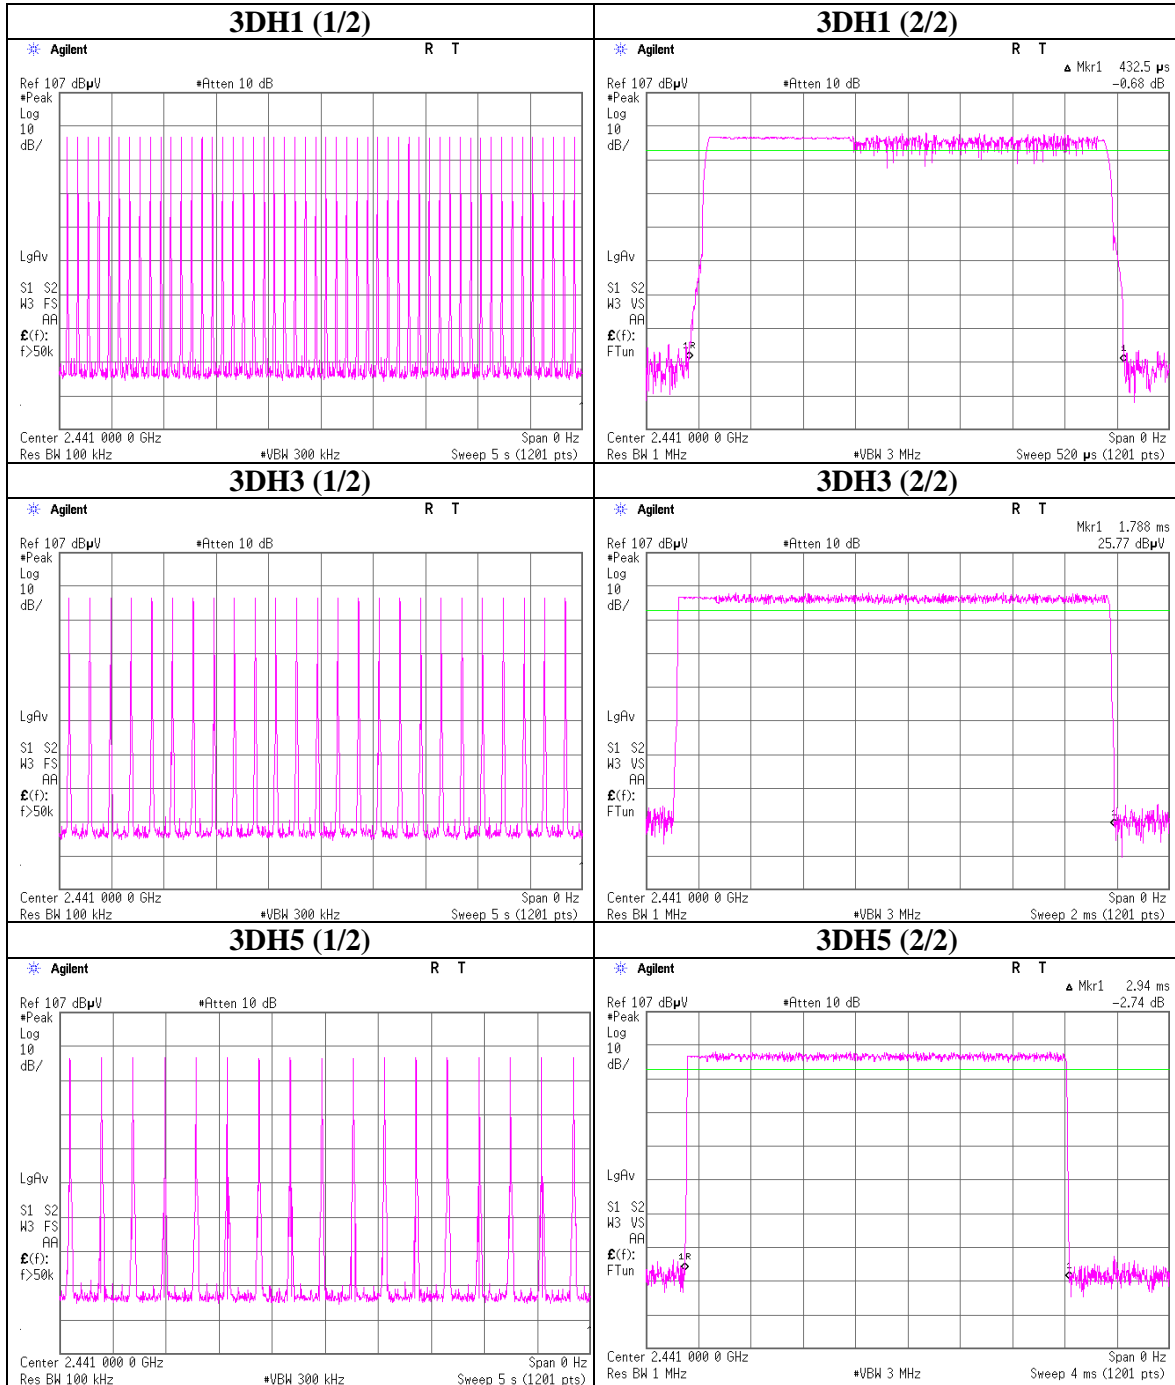

Maximum Peak Output Power

Test place Head Office EMC Lab. No.11 Measurement Room
Report No. 10007806H
Date 04/23/2013
Temperature/ Humidity 25 deg. C / 37% RH
Engineer Kazuya Yoshioka
Mode Tx (Hopping off) DH5/3DH5

Mode	Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Limit		Margin [dB]
					[dBm]	[mW]	[dBm]	[mW]	
DH5	2402.0	-13.80	1.63	9.95	-2.22	0.60	20.96	125	23.18
DH5	2441.0	-13.11	1.51	9.95	-1.65	0.68	20.96	125	22.61
DH5	2480.0	-13.17	1.57	9.95	-1.65	0.68	20.96	125	22.61
3DH5	2402.0	-11.52	1.63	9.95	0.06	1.01	20.96	125	20.90
3DH5	2441.0	-10.60	1.51	9.95	0.86	1.22	20.96	125	20.10
3DH5	2480.0	-10.63	1.57	9.95	0.89	1.23	20.96	125	20.07

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied)+ Attenuator

Average Output Power (for reporting purpose only)

Test place Head Office EMC Lab. No.11 Measurement Room
Report No. 10007806H
Date 04/23/2013
Temperature/ Humidity 25 deg. C / 37% RH
Engineer Kazuya Yoshioka
Mode Tx (Hopping off) DH5/3DH5

Mode	Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Limit		Margin [dB]
					[dBm]	[mW]	[dBm]	[mW]	
DH5	2402.0	-15.54	1.63	9.95	-3.96	0.40	20.96	125	24.92
DH5	2441.0	-14.74	1.51	9.95	-3.28	0.47	20.96	125	24.24
DH5	2480.0	-14.82	1.57	9.95	-3.30	0.47	20.96	125	24.26
3DH5	2402.0	-15.80	1.63	9.95	-4.22	0.38	20.96	125	25.18
3DH5	2441.0	-14.97	1.51	9.95	-3.51	0.45	20.96	125	24.47
3DH5	2480.0	-14.76	1.57	9.95	-3.24	0.47	20.96	125	24.20

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied)+ Attenuator

Test was not performed at AFH mode, because the decrease of number of channel (min: 20ch) at AFH mode does not influence on the output power and bandwidth of the EUT.

As this device had AFH mode and frequency separation could not meet the requirement of over 20dB BW without 2/3 relaxation, 125mW power limit was applied to it.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place : Head Office EMC Lab. No.2 and 3 Semi Anechoic Chamber
Report No. : 10007806H
Date : 05/12/2013 05/14/2013
Temperature/ Humidity : 25 deg. C / 34% RH 23 deg. C / 37% RH
Engineer : Satofumi Matsuyama Satofumi Matsuyama
(Above 1GHz) (30-1000MHz)
Mode : Tx, DH5 2402MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	39.488	QP	32.4	14.7	7.2	32.2	22.1	40.0	17.9	
Hori	123.749	QP	31.8	13.3	8.3	32.1	21.3	43.5	22.2	
Hori	199.917	QP	32.0	16.7	9.0	32.1	25.6	43.5	17.9	
Hori	296.997	QP	30.4	19.8	9.8	32.0	28.0	46.0	18.0	
Hori	407.104	QP	34.8	17.4	10.6	32.0	30.8	46.0	15.2	
Hori	481.122	QP	30.4	17.9	11.1	32.0	27.4	46.0	18.6	
Hori	2390.000	PK	44.6	26.8	2.4	35.7	38.1	73.9	35.8	
Hori	4804.000	PK	44.5	30.6	4.2	34.9	44.4	73.9	29.5	
Hori	7206.000	PK	NS	-	-	-	-	73.9	-	
Hori	9608.000	PK	NS	-	-	-	-	73.9	-	
Hori	2390.000	AV	32.4	26.8	2.4	35.7	25.9	53.9	28.0	
Hori	4804.000	AV	33.7	30.6	4.2	34.9	33.6	53.9	20.3	
Hori	7206.000	AV	NS	-	-	-	-	53.9	-	
Hori	9608.000	AV	NS	-	-	-	-	53.9	-	
Vert	39.497	QP	48.3	14.7	7.2	32.2	38.0	40.0	2.0	
Vert	123.747	QP	33.8	13.3	8.3	32.1	23.3	43.5	20.2	
Vert	199.911	QP	34.4	16.7	9.0	32.1	28.0	43.5	15.5	
Vert	296.997	QP	32.2	19.8	9.8	32.0	29.8	46.0	16.2	
Vert	407.092	QP	35.0	17.4	10.6	32.0	31.0	46.0	15.0	
Vert	481.112	QP	34.5	17.9	11.1	32.0	31.5	46.0	14.5	
Vert	2390.000	PK	44.9	26.8	2.4	35.7	38.4	73.9	35.5	
Vert	4804.000	PK	46.8	30.6	4.2	34.9	46.7	73.9	27.2	
Vert	7206.000	PK	NS	-	-	-	-	73.9	-	
Vert	9608.000	PK	NS	-	-	-	-	73.9	-	
Vert	2390.000	AV	32.4	26.8	2.4	35.7	25.9	53.9	28.0	
Vert	4804.000	AV	36.4	30.6	4.2	34.9	36.3	53.9	17.6	
Vert	7206.000	AV	NS	-	-	-	-	53.9	-	
Vert	9608.000	AV	NS	-	-	-	-	53.9	-	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

Distance factor: 10GHz-26.5GHz 20log(3.0m/1.0m)= 9.5dB

NS: No Signal Detect

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place Head Office EMC Lab. No.2 Semi Anechoic Chamber
Report No. 10007806H
Date 05/12/2013
Temperature/ Humidity 25 deg. C / 34% RH
Engineer Satofumi Matsuyama

Mode Tx, DH5 2402MHz

20dBc Data Sheet

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	2402.000	PK	96.6	26.8	2.4	35.7	90.1	-	-	Carrier
Hori	2400.000	PK	51.8	26.8	2.4	35.7	45.3	70.1	24.8	
Vert	2402.000	PK	97.5	26.8	2.4	35.7	91.0	-	-	Carrier
Vert	2400.000	PK	52.5	26.8	2.4	35.7	46.0	71.0	25.0	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place : Head Office EMC Lab. No.2 and 3 Semi Anechoic Chamber
Report No. : 10007806H
Date : 05/12/2013 05/14/2013
Temperature/ Humidity : 25 deg. C / 34% RH 23 deg. C / 37% RH
Engineer : Satofumi Matsuyama Satofumi Matsuyama
(Above 1GHz) (30-1000MHz)
Mode : Tx, DH5 2441MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	39.490	QP	32.3	14.7	7.2	32.2	22.0	40.0	18.0	
Hori	123.748	QP	31.5	13.3	8.3	32.1	21.0	43.5	22.5	
Hori	199.912	QP	32.3	16.7	9.0	32.1	25.9	43.5	17.6	
Hori	296.996	QP	30.4	19.8	9.8	32.0	28.0	46.0	18.0	
Hori	407.100	QP	34.7	17.4	10.6	32.0	30.7	46.0	15.3	
Hori	481.119	QP	30.3	17.9	11.1	32.0	27.3	46.0	18.7	
Hori	4882.000	PK	45.4	30.9	4.2	34.9	45.6	73.9	28.3	
Hori	7323.000	PK	NS	-	-	-	-	73.9	-	
Hori	9764.000	PK	NS	-	-	-	-	73.9	-	
Hori	4882.000	AV	35.3	30.9	4.2	34.9	35.5	53.9	18.4	
Hori	7323.000	AV	NS	-	-	-	-	53.9	-	
Hori	9764.000	AV	NS	-	-	-	-	53.9	-	
Vert	39.495	QP	48.2	14.7	7.2	32.2	37.9	40.0	2.1	
Vert	123.746	QP	33.1	13.3	8.3	32.1	22.6	43.5	20.9	
Vert	199.915	QP	34.4	16.7	9.0	32.1	28.0	43.5	15.5	
Vert	296.997	QP	32.1	19.8	9.8	32.0	29.7	46.0	16.3	
Vert	407.091	QP	35.3	17.4	10.6	32.0	31.3	46.0	14.7	
Vert	481.115	QP	34.2	17.9	11.1	32.0	31.2	46.0	14.8	
Vert	4882.000	PK	45.3	30.9	4.2	34.9	45.5	73.9	28.4	
Vert	7323.000	PK	NS	-	-	-	-	73.9	-	
Vert	9764.000	PK	NS	-	-	-	-	73.9	-	
Vert	4882.000	AV	35.3	30.9	4.2	34.9	35.5	53.9	18.4	
Vert	7323.000	AV	NS	-	-	-	-	53.9	-	
Vert	9764.000	AV	NS	-	-	-	-	53.9	-	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

Distance factor: 10GHz-26.5GHz 20log(3.0m/1.0m)= 9.5dB

NS: No Signal Detect

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place : Head Office EMC Lab. No.2 Semi Anechoic Chamber
Report No. : 10007806H
Date : 05/12/2013 05/16/2013
Temperature/ Humidity : 25 deg. C / 34% RH 23 deg. C / 52% RH
Engineer : Satofumi Matsuyama Katsunori Okai
(Above 1GHz) (30-1000MHz)
Mode : Tx, DH5 2480MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	40.000	QP	28.0	14.5	6.9	28.6	20.8	40.0	19.2	
Hori	111.028	QP	33.4	11.7	7.6	28.3	24.4	43.5	19.1	
Hori	296.997	QP	32.7	19.6	8.8	27.6	33.5	46.0	12.5	
Hori	333.081	QP	33.6	15.2	9.0	27.9	29.9	46.0	16.1	
Hori	395.994	QP	33.5	17.3	9.3	28.4	31.7	46.0	14.3	
Hori	407.097	QP	33.2	17.4	9.3	28.4	31.5	46.0	14.5	
Hori	2483.500	PK	49.0	26.7	2.4	35.7	42.4	73.9	31.5	
Hori	4960.000	PK	45.7	31.1	4.2	34.9	46.1	73.9	27.8	
Hori	7440.000	PK	NS	-	-	-	-	73.9	-	
Hori	9920.000	PK	NS	-	-	-	-	73.9	-	
Hori	2483.500	AV	36.4	26.7	2.4	35.7	29.8	53.9	24.1	
Hori	4960.000	AV	35.8	31.1	4.2	34.9	36.2	53.9	17.7	
Hori	7440.000	AV	NS	-	-	-	-	53.9	-	
Hori	9920.000	AV	NS	-	-	-	-	53.9	-	
Vert	40.000	QP	45.9	14.5	6.9	28.6	38.7	40.0	1.3	
Vert	111.026	QP	35.2	11.7	7.6	28.3	26.2	43.5	17.3	
Vert	123.748	QP	33.7	13.2	7.7	28.2	26.4	43.5	17.1	
Vert	296.998	QP	30.2	19.6	8.8	27.6	31.0	46.0	15.0	
Vert	395.997	QP	34.4	17.3	9.3	28.4	32.6	46.0	13.4	
Vert	407.095	QP	34.0	17.4	9.3	28.4	32.3	46.0	13.7	
Vert	481.112	QP	33.5	17.9	9.6	28.7	32.3	46.0	13.7	
Vert	2483.500	PK	47.9	26.7	2.4	35.7	41.3	73.9	32.6	
Vert	4960.000	PK	44.3	31.1	4.2	34.9	44.7	73.9	29.2	
Vert	7440.000	PK	NS	-	-	-	-	73.9	-	
Vert	9920.000	PK	NS	-	-	-	-	73.9	-	
Vert	2483.500	AV	35.0	26.7	2.4	35.7	28.4	53.9	25.5	
Vert	4960.000	AV	33.3	31.1	4.2	34.9	33.7	53.9	20.2	
Vert	7440.000	AV	NS	-	-	-	-	53.9	-	
Vert	9920.000	AV	NS	-	-	-	-	53.9	-	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

Distance factor: 10GHz-26.5GHz 20log(3.0m/1.0m)= 9.5dB

NS: No Signal Detect

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place : Head Office EMC Lab. No.2 Semi Anechoic Chamber
Report No. : 10007806H
Date : 05/12/2013 05/16/2013
Temperature/ Humidity : 25 deg. C / 34% RH 23 deg. C / 52% RH
Engineer : Satofumi Matsuyama Katsunori Okai
(Above 1GHz) (30-1000MHz)
Mode : Tx, 3DH5 2402MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	111.028	QP	32.5	11.7	7.6	28.3	23.5	43.5	20.0	
Hori	199.908	QP	31.3	16.6	8.1	27.8	28.2	43.5	15.3	
Hori	296.995	QP	32.5	19.6	8.8	27.6	33.3	46.0	12.7	
Hori	333.079	QP	31.7	15.2	9.0	27.9	28.0	46.0	18.0	
Hori	395.995	QP	32.8	17.3	9.3	28.4	31.0	46.0	15.0	
Hori	407.097	QP	32.7	17.4	9.3	28.4	31.0	46.0	15.0	
Hori	2390.000	PK	45.3	26.8	2.4	35.7	38.8	73.9	35.1	
Hori	4804.000	PK	43.5	30.6	4.2	34.9	43.4	73.9	30.5	
Hori	7206.000	PK	NS	-	-	-	-	73.9	-	
Hori	9608.000	PK	NS	-	-	-	-	73.9	-	
Hori	2390.000	AV	32.2	26.8	2.4	35.7	25.7	53.9	28.2	
Hori	4804.000	AV	32.0	30.6	4.2	34.9	31.9	53.9	22.0	
Hori	7206.000	AV	NS	-	-	-	-	53.9	-	
Hori	9608.000	AV	NS	-	-	-	-	53.9	-	
Vert	40.000	QP	45.6	14.5	6.9	28.6	38.4	40.0	1.6	
Vert	111.027	QP	34.9	11.7	7.6	28.3	25.9	43.5	17.6	
Vert	296.994	QP	30.4	19.6	8.8	27.6	31.2	46.0	14.8	
Vert	407.096	QP	32.8	17.4	9.3	28.4	31.1	46.0	14.9	
Vert	420.743	QP	31.0	17.5	9.4	28.5	29.4	46.0	16.6	
Vert	481.112	QP	32.7	17.9	9.6	28.7	31.5	46.0	14.5	
Vert	2390.000	PK	44.4	26.8	2.4	35.7	37.9	73.9	36.0	
Vert	4804.000	PK	45.0	30.6	4.2	34.9	44.9	73.9	29.0	
Vert	7206.000	PK	NS	-	-	-	-	73.9	-	
Vert	9608.000	PK	NS	-	-	-	-	73.9	-	
Vert	2390.000	AV	32.2	26.8	2.4	35.7	25.7	53.9	28.2	
Vert	4804.000	AV	34.2	30.6	4.2	34.9	34.1	53.9	19.8	
Vert	7206.000	AV	NS	-	-	-	-	53.9	-	
Vert	9608.000	AV	NS	-	-	-	-	53.9	-	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

Distance factor: 10GHz-26.5GHz 20log(3.0m/1.0m)= 9.5dB
NS: No Signal Detect

Radiated Spurious Emission

Test place : Head Office EMC Lab. No.2 Semi Anechoic Chamber
 Report No. : 10007806H
 Date : 05/12/2013
 Temperature/ Humidity : 25 deg. C / 34% RH
 Engineer : Satofumi Matsuyama
 Mode : Tx, 3DH5 2402MHz

20dBc Data Sheet

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	2402.000	PK	96.7	26.8	2.4	35.7	90.2	-	-	Carrier
Hori	2400.000	PK	48.3	26.8	2.4	35.7	41.8	70.2	28.4	
Vert	2402.000	PK	97.2	26.8	2.4	35.7	90.7	-	-	Carrier
Vert	2400.000	PK	48.8	26.8	2.4	35.7	42.3	70.7	28.4	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place : Head Office EMC Lab. No.2 Semi Anechoic Chamber
Report No. : 10007806H
Date : 05/12/2013 05/16/2013
Temperature/ Humidity : 25 deg. C / 34% RH 23 deg. C / 52% RH
Engineer : Satofumi Matsuyama Katsunori Okai
(Above 1GHz) (30-1000MHz)
Mode : Tx, 3DH5 2441MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	111.027	QP	33.4	11.7	7.6	28.3	24.4	43.5	19.1	
Hori	199.908	QP	31.5	16.6	8.1	27.8	28.4	43.5	15.1	
Hori	296.995	QP	30.1	19.6	8.8	27.6	30.9	46.0	15.1	
Hori	333.078	QP	33.0	15.2	9.0	27.9	29.3	46.0	16.7	
Hori	371.242	QP	31.8	16.5	9.2	28.2	29.3	46.0	16.7	
Hori	407.096	QP	32.8	17.4	9.3	28.4	31.1	46.0	14.9	
Hori	4882.000	PK	45.0	30.9	4.2	34.9	45.2	73.9	28.7	
Hori	7323.000	PK	NS	-	-	-	-	73.9	-	
Hori	9764.000	PK	NS	-	-	-	-	73.9	-	
Hori	4882.000	AV	33.4	30.9	4.2	34.9	33.6	53.9	20.3	
Hori	7323.000	AV	NS	-	-	-	-	53.9	-	
Hori	9764.000	AV	NS	-	-	-	-	53.9	-	
Vert	40.501	QP	42.1	14.3	6.9	28.6	34.7	40.0	5.3	
Vert	123.748	QP	33.0	13.2	7.7	28.2	25.7	43.5	17.8	
Vert	296.994	QP	28.8	19.6	8.8	27.6	29.6	46.0	16.4	
Vert	407.096	QP	32.5	17.4	9.3	28.4	30.8	46.0	15.2	
Vert	420.744	QP	30.5	17.5	9.4	28.5	28.9	46.0	17.1	
Vert	481.113	QP	32.9	17.9	9.6	28.7	31.7	46.0	14.3	
Vert	4882.000	PK	44.6	30.9	4.2	34.9	44.8	73.9	29.1	
Vert	7323.000	PK	NS	-	-	-	-	73.9	-	
Vert	9764.000	PK	NS	-	-	-	-	73.9	-	
Vert	4882.000	AV	33.6	30.9	4.2	34.9	33.8	53.9	20.1	
Vert	7323.000	AV	NS	-	-	-	-	53.9	-	
Vert	9764.000	AV	NS	-	-	-	-	53.9	-	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

Distance factor: 10GHz-26.5GHz 20log(3.0m/1.0m)= 9.5dB

NS: No Signal Detect

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission



Test place : Head Office EMC Lab. No.2 Semi Anechoic Chamber
Report No. : 10007806H
Date : 05/12/2013 05/16/2013
Temperature/ Humidity : 25 deg. C / 34% RH 23 deg. C / 52% RH
Engineer : Satofumi Matsuyama Katsunori Okai
(Above 1GHz) (30-1000MHz)
Mode : Tx, 3DH5 2480MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	111.027	QP	33.0	11.7	7.6	28.3	24.0	43.5	19.5	
Hori	199.907	QP	31.0	16.6	8.1	27.8	27.9	43.5	15.6	
Hori	296.997	QP	30.6	19.6	8.8	27.6	31.4	46.0	14.6	
Hori	333.079	QP	32.5	15.2	9.0	27.9	28.8	46.0	17.2	
Hori	395.995	QP	35.4	17.3	9.3	28.4	33.6	46.0	12.4	
Hori	407.096	QP	33.1	17.4	9.3	28.4	31.4	46.0	14.6	
Hori	2483.500	PK	51.0	26.7	2.4	35.7	44.4	73.9	29.5	
Hori	4960.000	PK	44.8	31.1	4.2	34.9	45.2	73.9	28.7	
Hori	7440.000	PK	NS	-	-	-	-	73.9	-	
Hori	9920.000	PK	NS	-	-	-	-	73.9	-	
Hori	2483.500	AV	37.0	26.7	2.4	35.7	30.4	53.9	23.5	
Hori	4960.000	AV	34.1	31.1	4.2	34.9	34.5	53.9	19.4	
Hori	7440.000	AV	NS	-	-	-	-	53.9	-	
Hori	9920.000	AV	NS	-	-	-	-	53.9	-	
Vert	40.501	QP	42.6	14.3	6.9	28.6	35.2	40.0	4.8	
Vert	199.907	QP	34.0	16.6	8.1	27.8	30.9	43.5	12.6	
Vert	296.995	QP	28.7	19.6	8.8	27.6	29.5	46.0	16.5	
Vert	407.096	QP	33.2	17.4	9.3	28.4	31.5	46.0	14.5	
Vert	420.744	QP	33.0	17.5	9.4	28.5	31.4	46.0	14.6	
Vert	481.113	QP	32.9	17.9	9.6	28.7	31.7	46.0	14.3	
Vert	2483.500	PK	50.2	26.7	2.4	35.7	43.6	73.9	30.3	
Vert	4960.000	PK	44.1	31.1	4.2	34.9	44.5	73.9	29.4	
Vert	7440.000	PK	NS	-	-	-	-	73.9	-	
Vert	9920.000	PK	NS	-	-	-	-	73.9	-	
Vert	2483.500	AV	35.5	26.7	2.4	35.7	28.9	53.9	25.0	
Vert	4960.000	AV	32.6	31.1	4.2	34.9	33.0	53.9	20.9	
Vert	7440.000	AV	NS	-	-	-	-	53.9	-	
Vert	9920.000	AV	NS	-	-	-	-	53.9	-	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).


Distance factor: 10GHz-26.5GHz 20log(3.0m/1.0m)= 9.5dB
NS: No Signal Detect

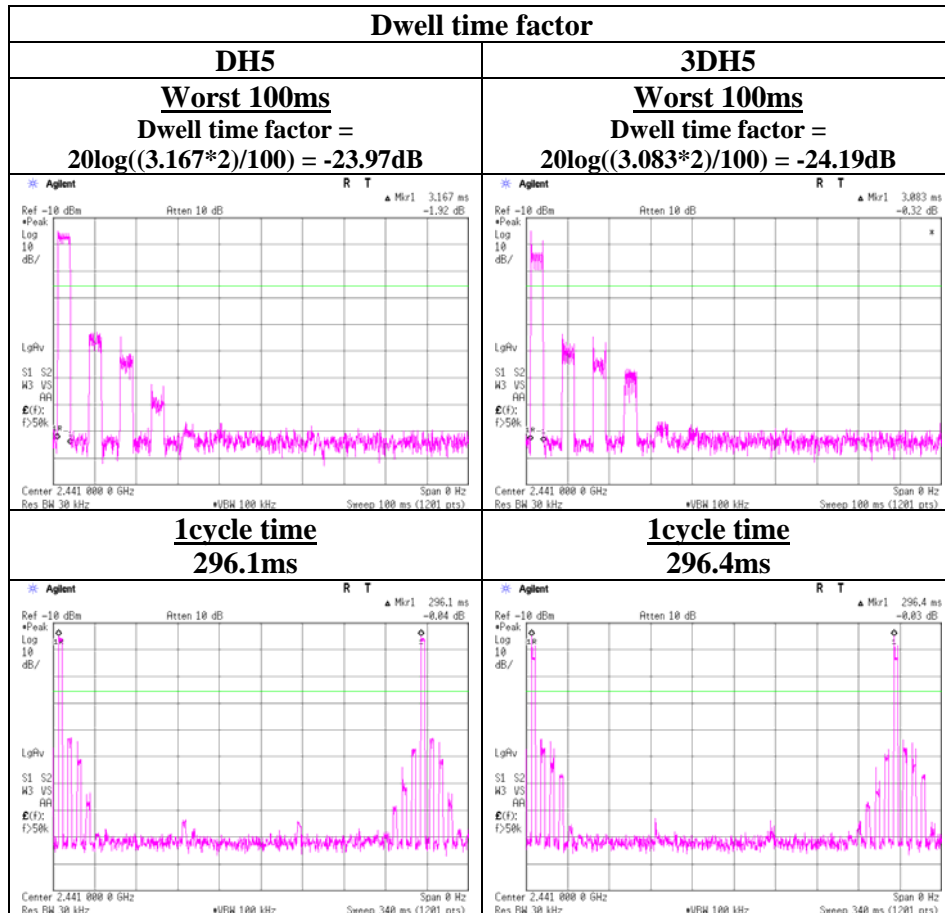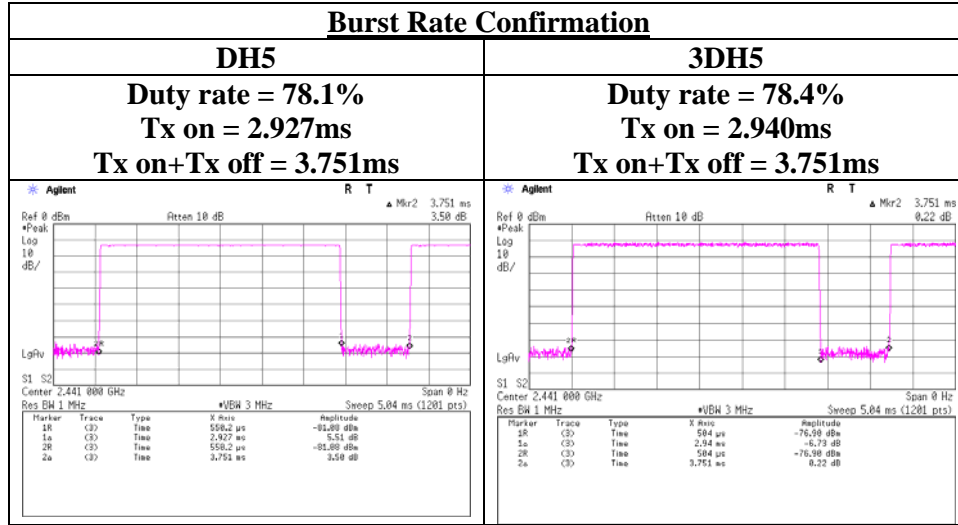

* Dwell time factor was not used for Radiated emission.

Conducted Spurious Emission

Tx DH5 2402MHz

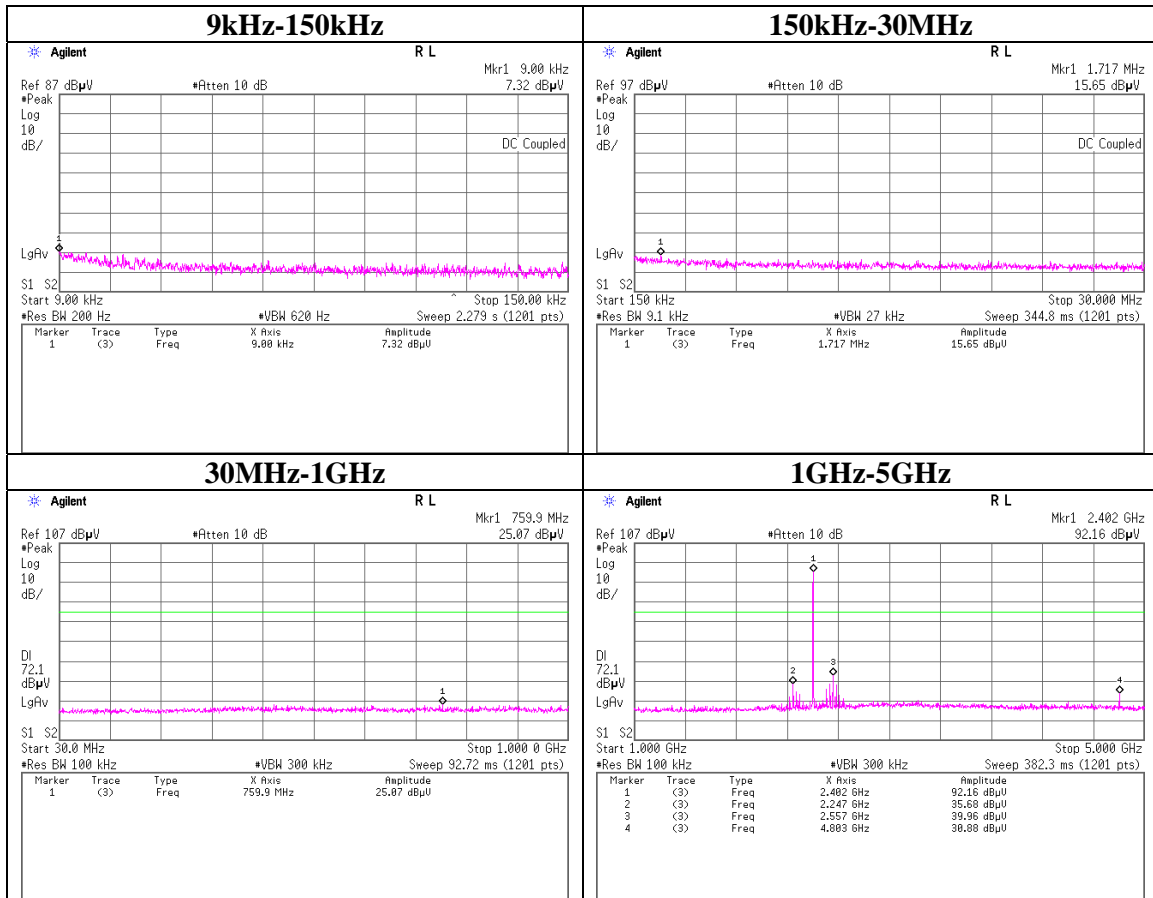

UL Japan, Inc.

Head Office EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Conducted Spurious Emission

Tx DH5 2402MHz

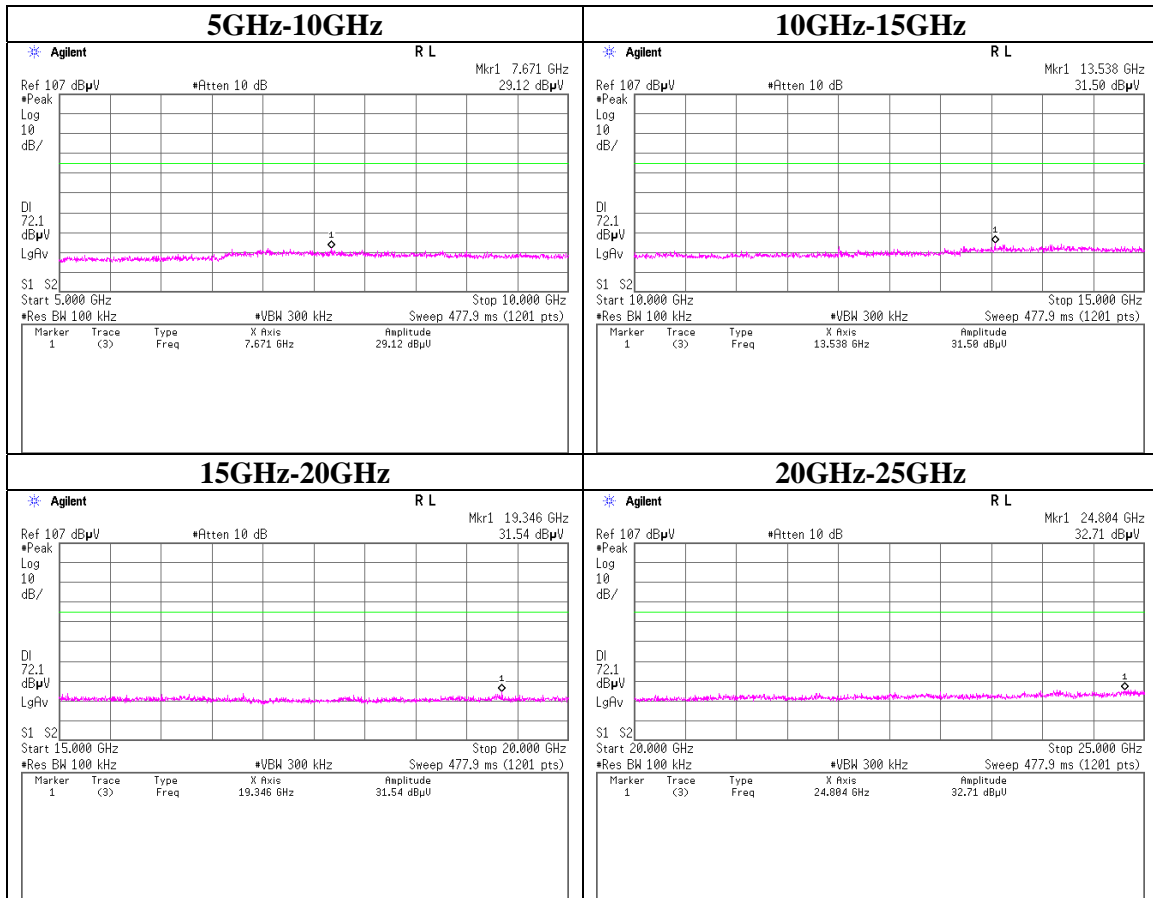

UL Japan, Inc.

Head Office EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Conducted Spurious Emission

Tx DH5 2441MHz

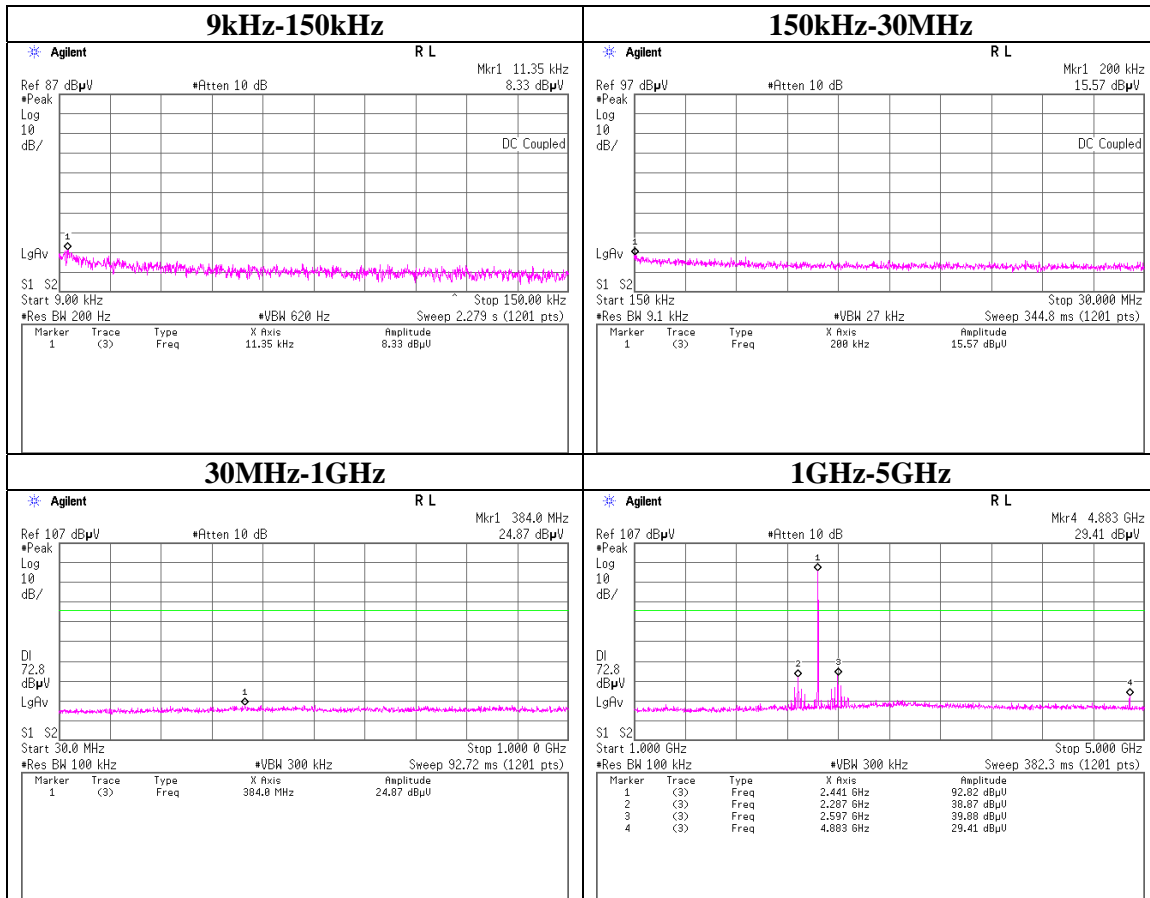

UL Japan, Inc.

Head Office EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Conducted Spurious Emission

Tx DH5 2441MHz

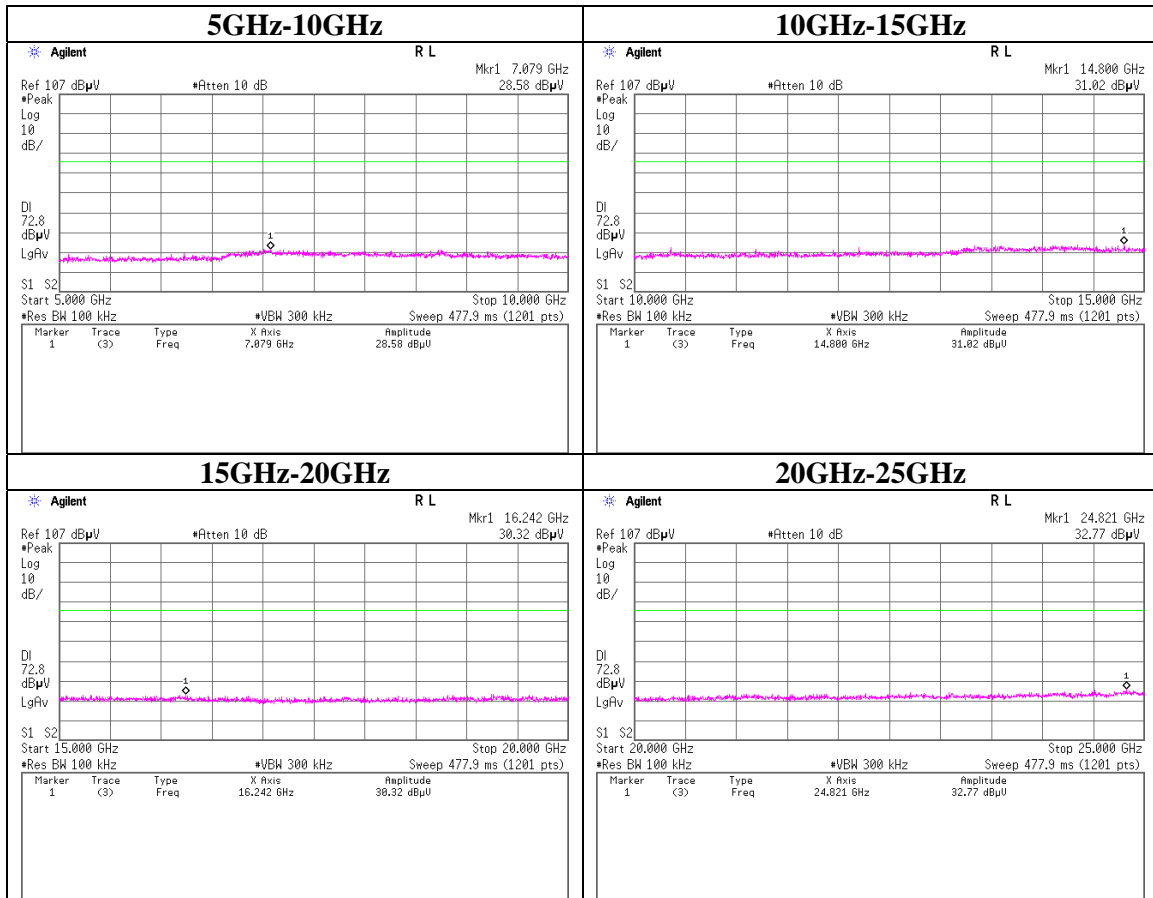

UL Japan, Inc.

Head Office EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Conducted Spurious Emission

Tx DH5 2480MHz

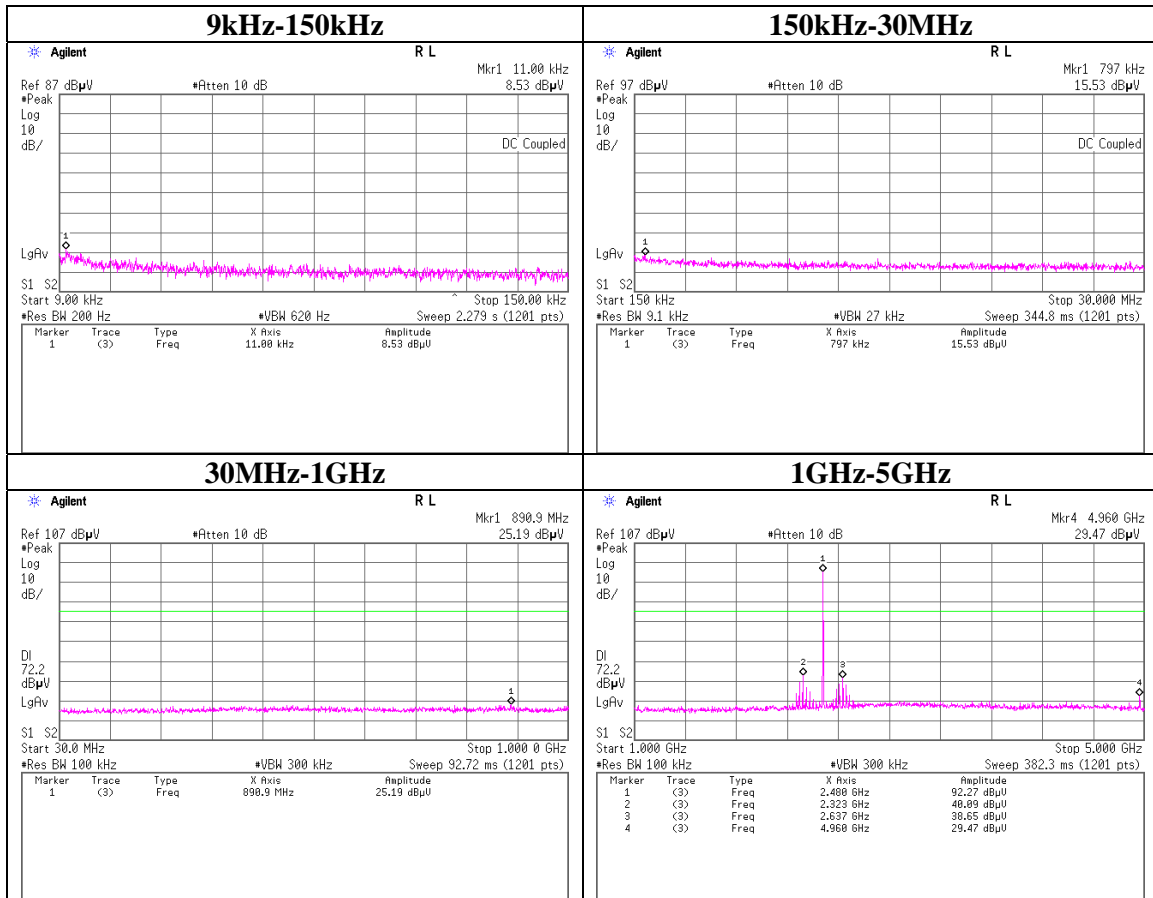

UL Japan, Inc.

Head Office EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Conducted Spurious Emission

Tx DH5 2480MHz

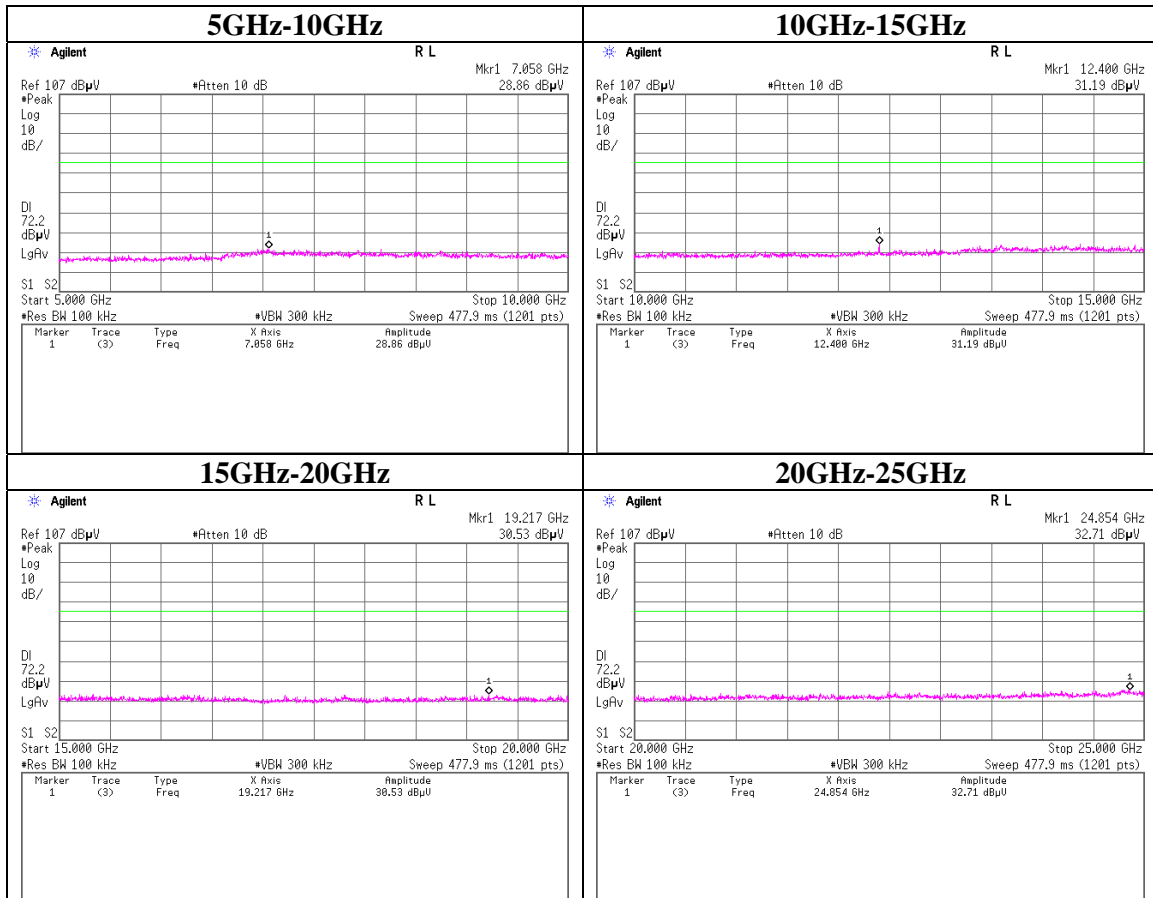

UL Japan, Inc.

Head Office EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Conducted Spurious Emission

Tx 3DH5 2402MHz

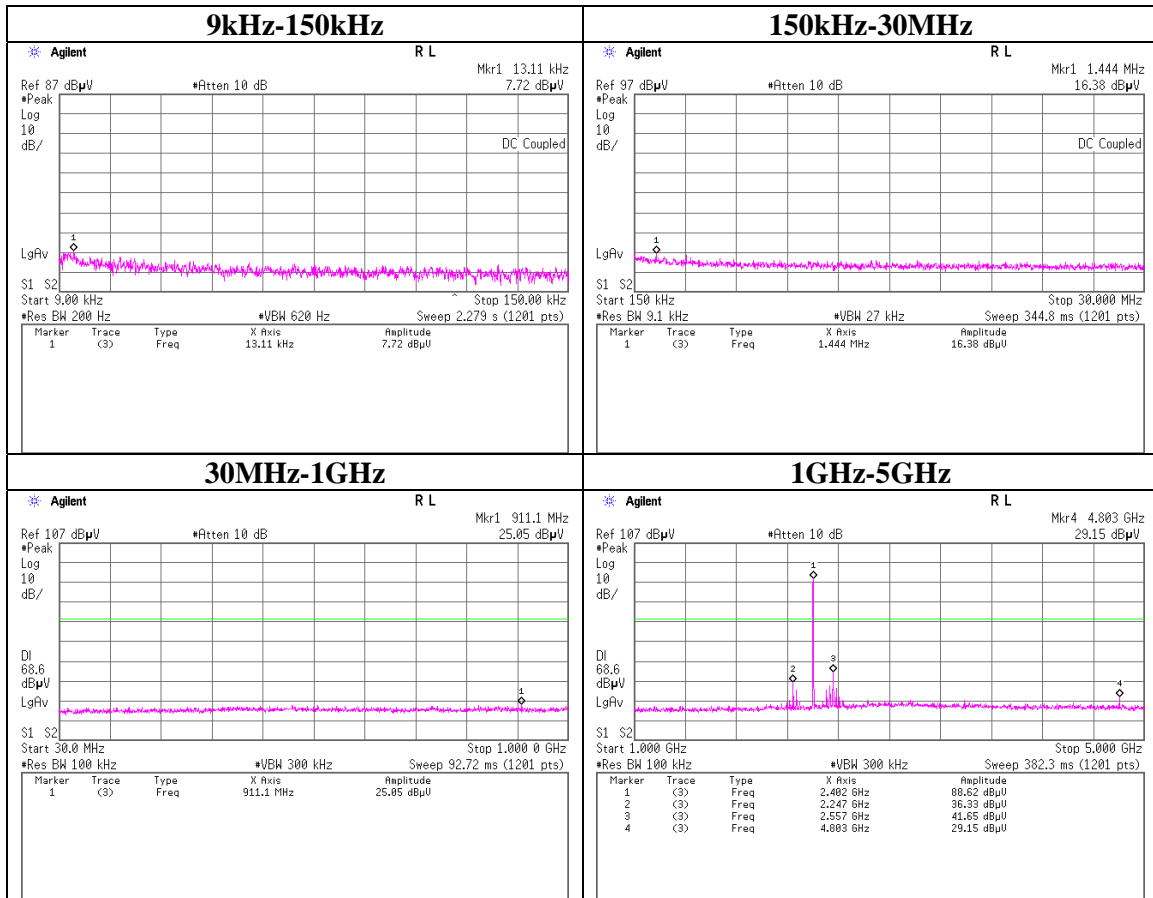

UL Japan, Inc.

Head Office EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Conducted Spurious Emission

Tx 3DH5 2402MHz

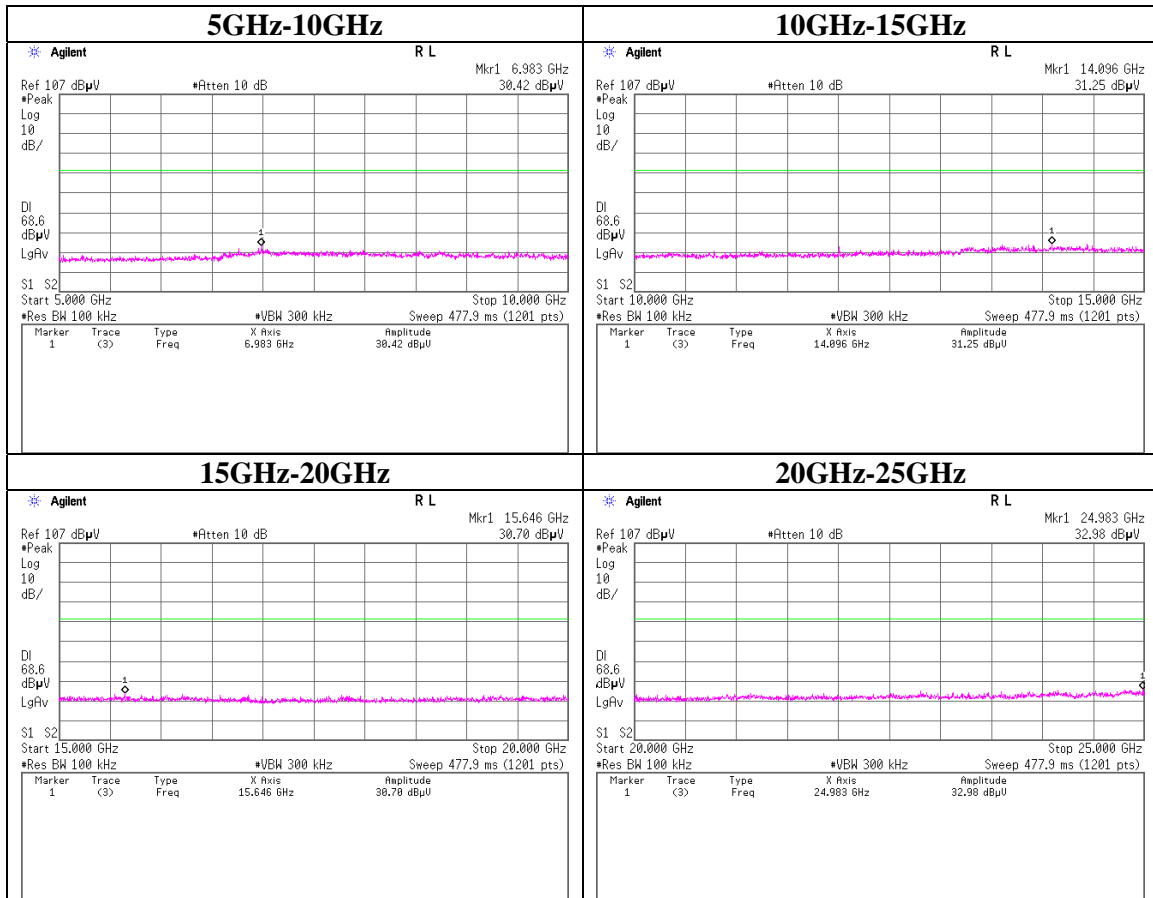

UL Japan, Inc.

Head Office EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Conducted Spurious Emission

Tx 3DH5 2441MHz

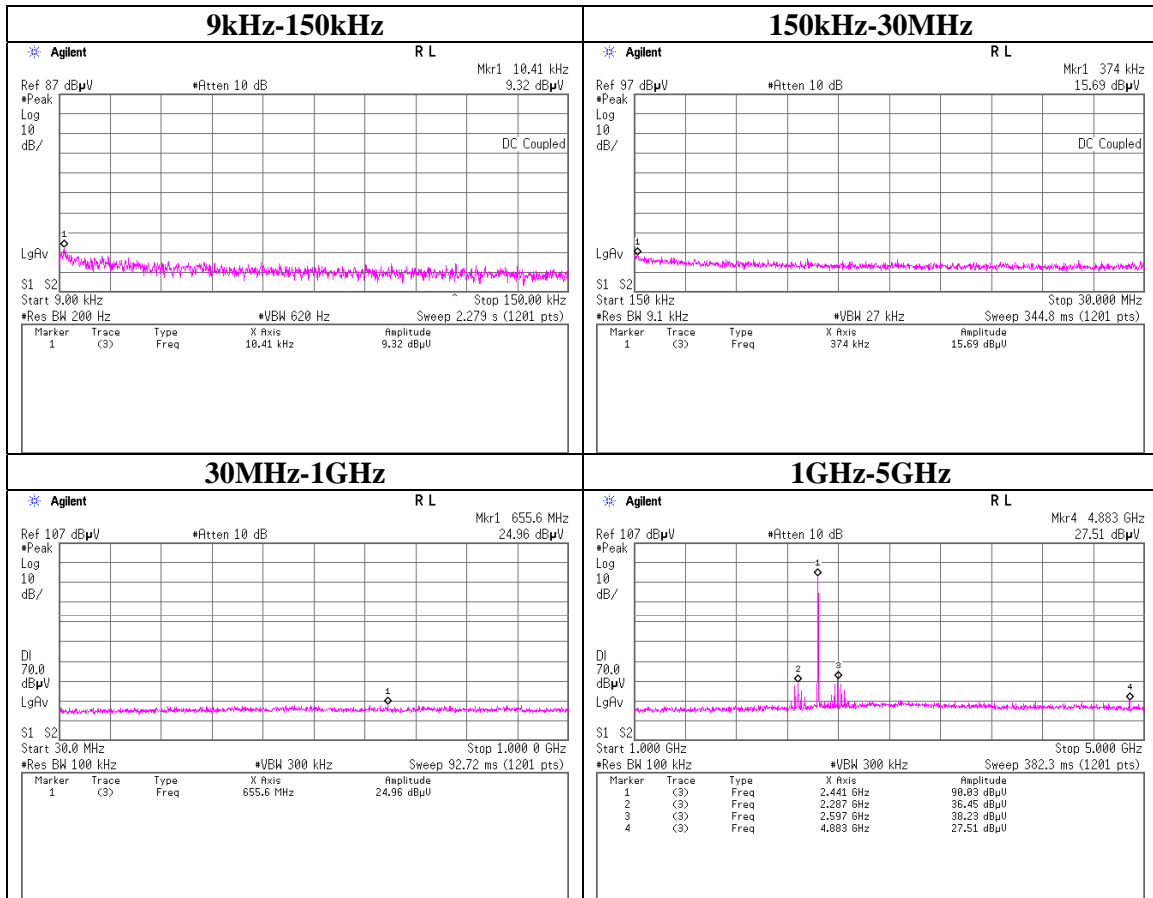

UL Japan, Inc.

Head Office EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Conducted Spurious Emission

Tx 3DH5 2441MHz

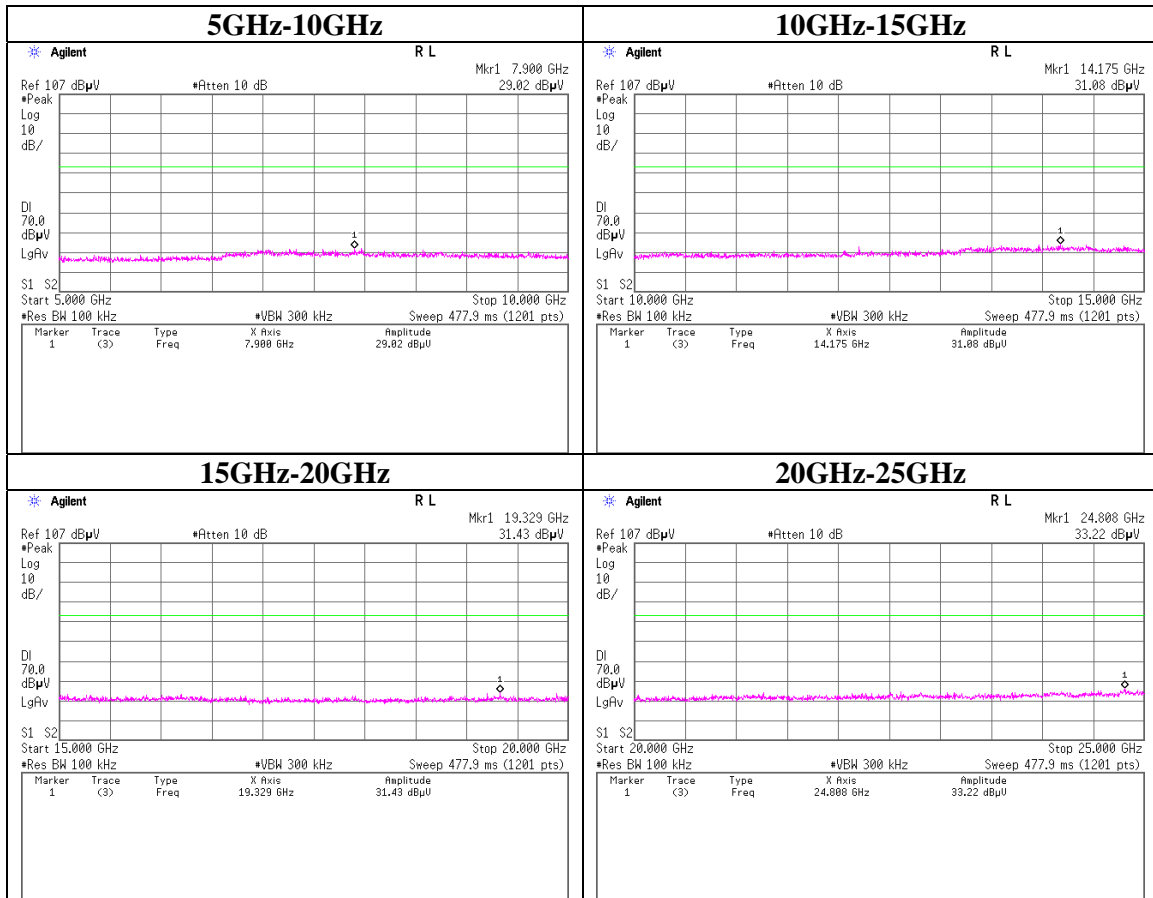

UL Japan, Inc.

Head Office EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Conducted Spurious Emission

Tx 3DH5 2480MHz

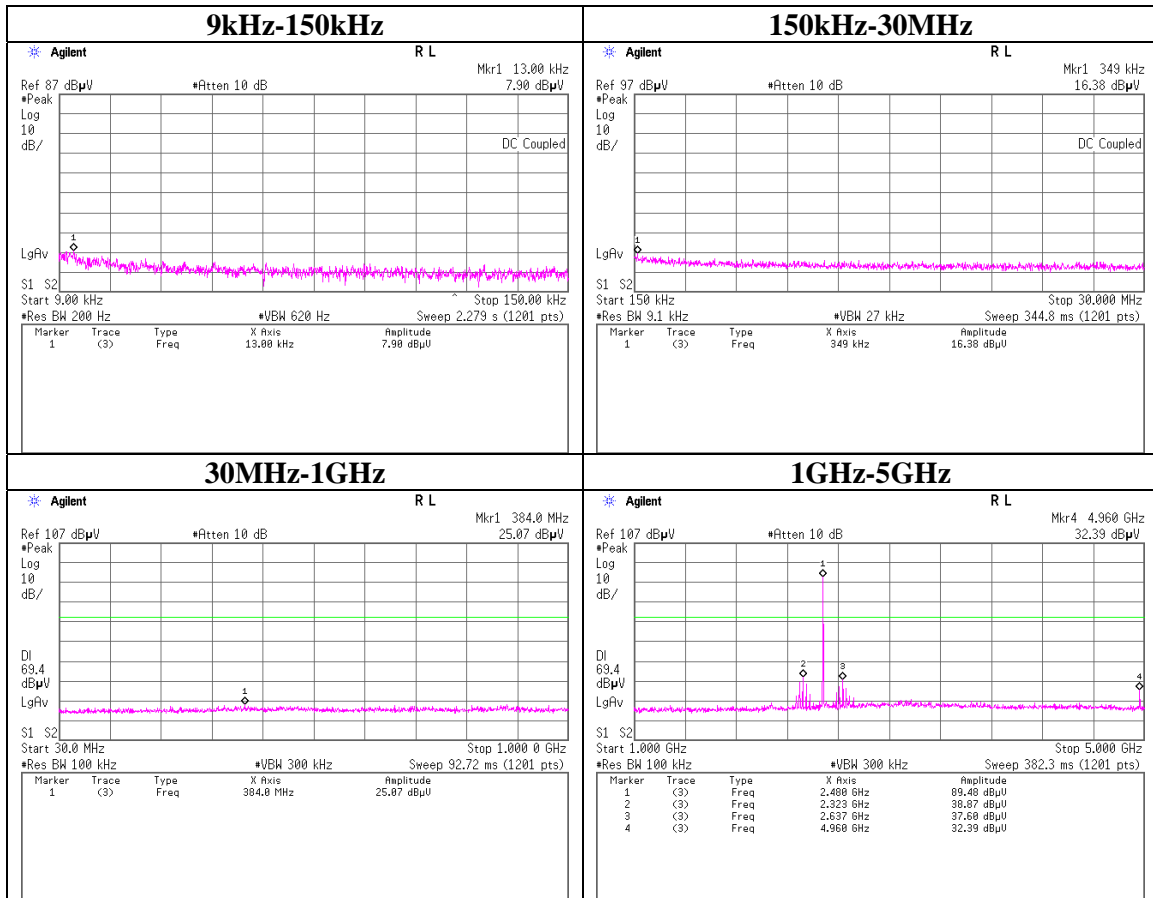

UL Japan, Inc.

Head Office EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Conducted Spurious Emission

Tx 3DH5 2480MHz

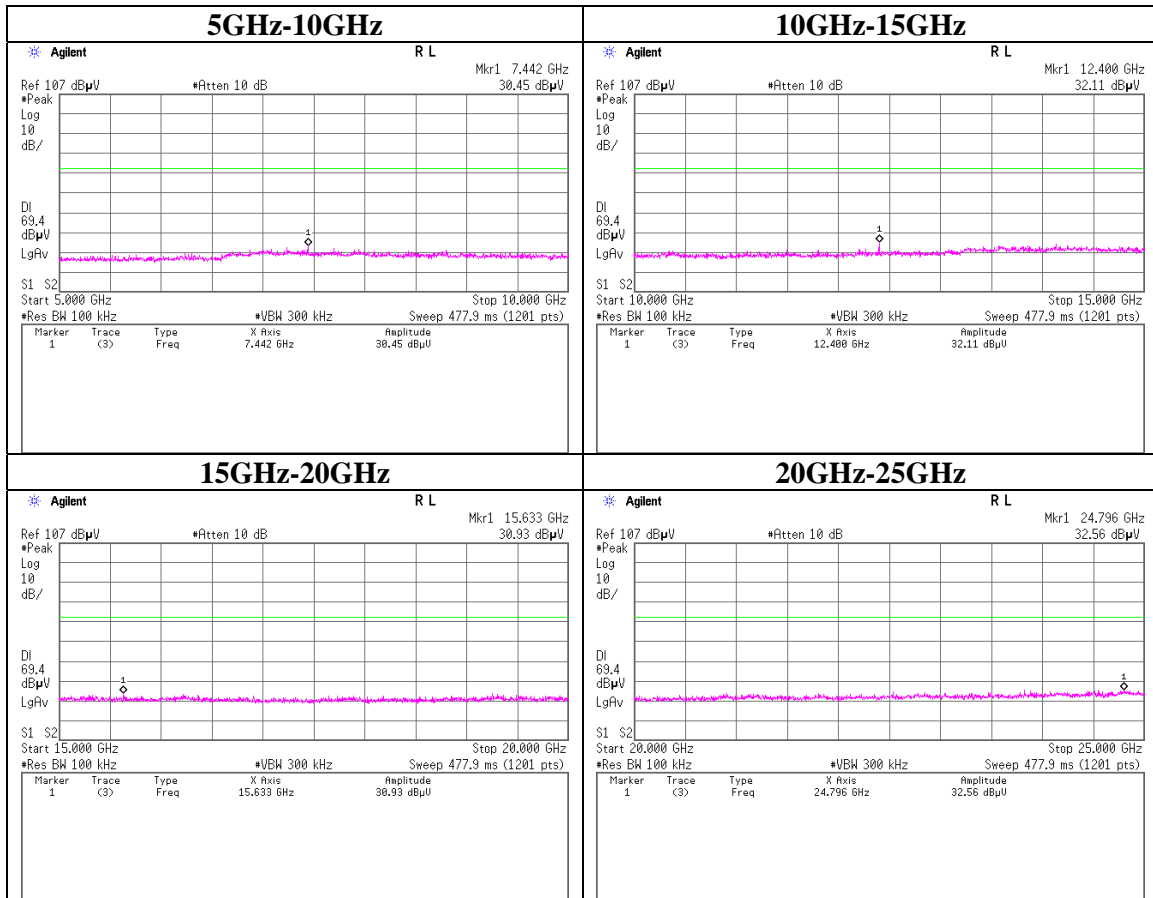

UL Japan, Inc.

Head Office EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999


Facsimile : +81 596 24 8124

Conducted Emission Band Edge compliance

Tx DH5, Hopping on

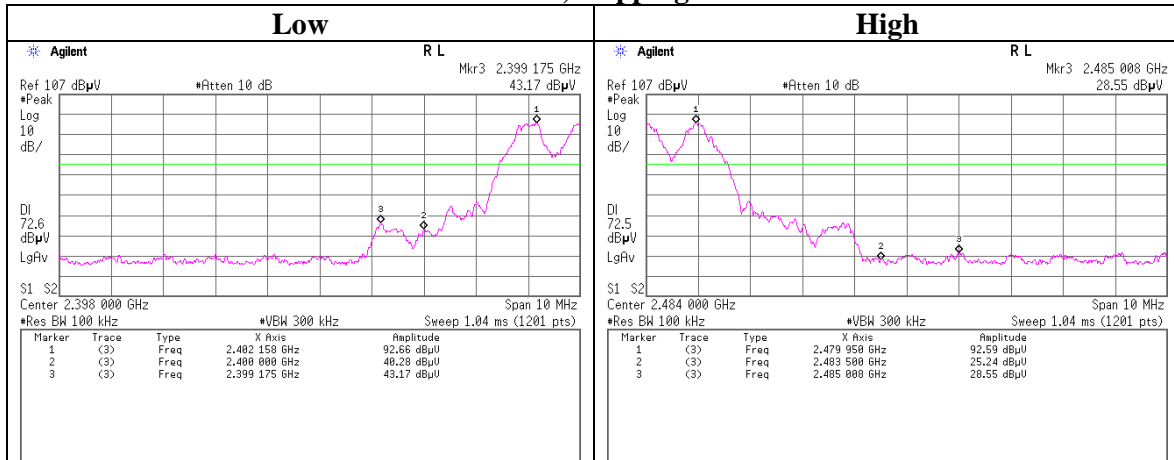

Tx DH5, Hopping off

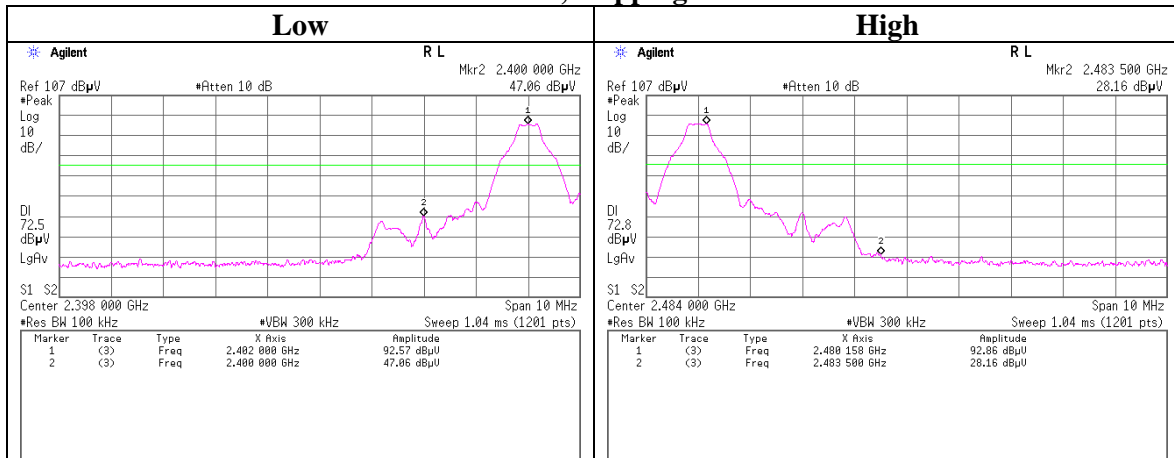

UL Japan, Inc.

Head Office EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999


Facsimile : +81 596 24 8124

Conducted Emission Band Edge compliance

Tx 3DH5, Hopping on

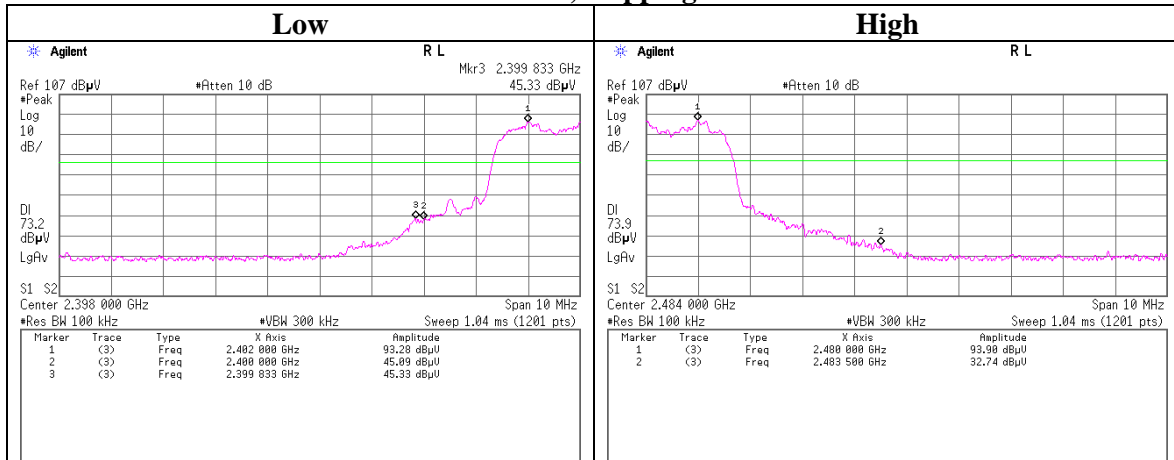

Tx 3DH5, Hopping off

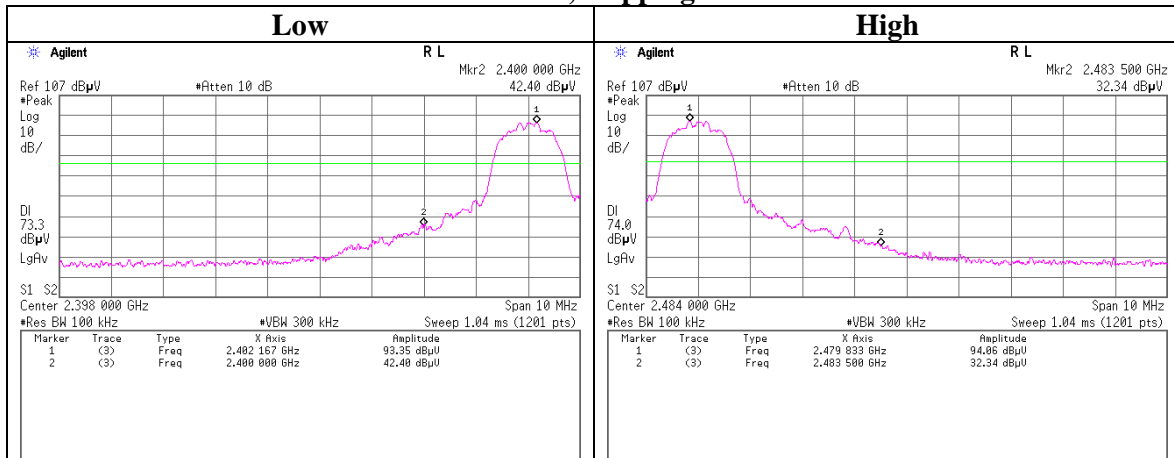

UL Japan, Inc.


Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

99% Occupied Bandwidth

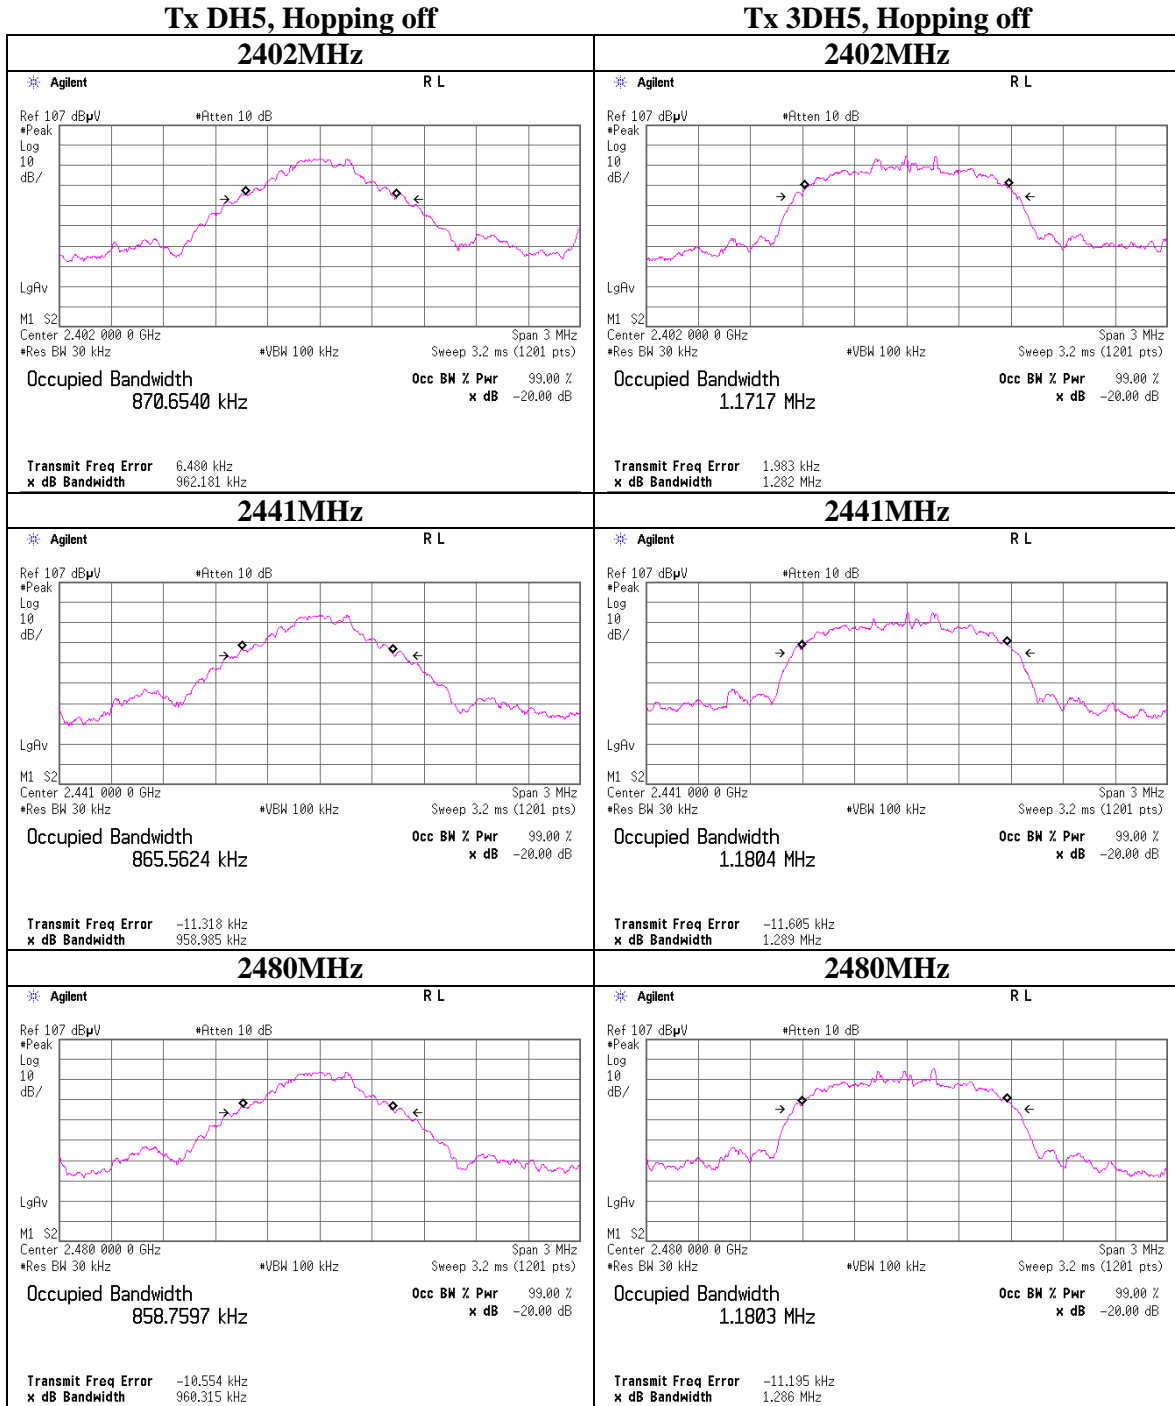

99% Occupied Bandwidth

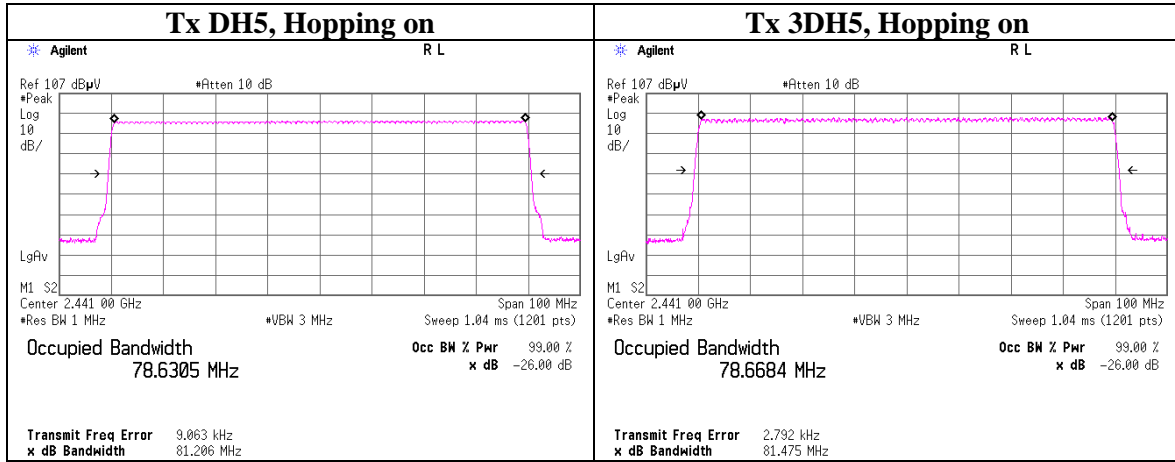

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

APPENDIX 2: Test instruments

EMI test equipment

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
MRENT-95	Spectrum Analyzer	Agilent	E4440A	MY46185823	AT	2012/06/19 * 12
MCC-99	Microwave Cable 1G-40GHz	Schner	SUCOFLEX102	30820/2	AT	2012/05/09 * 12
MAT-24	Attenuator(10dB)(above 1GHz)	Agilent	8493C	71389	AT	2012/06/27 * 12
MOS-19	Thermo-Hygrometer	Custom	CTH-201	0001	AT	2012/12/25 * 12
MPM-12	Power Meter	Anritsu	ML2495A	0825002	AT	2012/06/01 * 12
MPSE-17	Power sensor	Anritsu	MA2411B	0738285	AT	2012/06/01 * 12
MOS-14	Thermo-Hygrometer	Custom	CTH-201	-	AT	2013/02/26 * 12
MCC-137	Microwave cable	HUBER+SUHNER	SUCOFLEX 102	37954/2	AT	2012/10/19 * 12
MAEC-02	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-06902	RE	2012/06/29 * 12
MOS-22	Thermo-Hygrometer	Custom	CTH-201	0003	RE	2013/02/26 * 12
MJM-14	Measure	KOMELON	KMC-36	-	RE	-
COTS-MEMI	EMI measurement program	TSJ	TEPTO-DV	-	RE	-
MSA-03	Spectrum Analyzer	Agilent	E4448A	MY44020357	RE	2012/11/20 * 12
MHA-06	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	254	RE	2013/02/15 * 12
MPA-10	Pre Amplifier	Agilent	8449B	3008A02142	RE	2013/01/10 * 12
MHA-02	Horn Antenna 18-26.5GHz	EMCO	3160-09	1265	RE	2013/02/15 * 12
MCC-132	Microwave Cable	HUBER+SUHNER	SUCOFLEX104	336161/4(1m) / 340639(5m)	RE	2012/09/05 * 12
MHF-06	High Pass Filter 3.5-24GHz	TOKIMEC	TF323DCA	601	RE	2012/05/30 * 12
MAEC-03	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	RE	2013/02/28 * 12
MOS-13	Thermo-Hygrometer	Custom	CTH-180	-	RE	2013/02/26 * 12
MJM-16	Measure	KOMELON	KMC-36	-	RE	-
MTR-08	Test Receiver	Rohde & Schwarz	ESCI	100767	RE	2012/08/23 * 12
MBA-03	Biconical Antenna	Schwarzbeck	BBA9106	1915	RE	2012/10/08 * 12
MLA-03	Logperiodic Antenna	Schwarzbeck	USLP9143	174	RE	2012/10/08 * 12
MCC-51	Coaxial cable	UL Japan	-	-	RE	2012/07/12 * 12
MAT-70	Attenuator(6dB)	Agilent	8491A-006	MY52460153	RE	2013/04/05 * 12
MPA-13	Pre Amplifier	SONOMA INSTRUMENT	310	260834	RE	2013/03/12 * 12
MTR-03	Test Receiver	Rohde & Schwarz	ESCI	100300	RE	2013/04/10 * 12
MBA-02	Biconical Antenna	Schwarzbeck	BBA9106	VHA91032008	RE	2012/10/08 * 12
MLA-02	Logperiodic Antenna	Schwarzbeck	USLP9143	201	RE	2012/10/08 * 12
MCC-12	Coaxial Cable	Fujikura/Agilent	-	-	RE	2013/02/06 * 12
MAT-07	Attenuator(6dB)	Weinschel Corp	2	BK7970	RE	2012/11/06 * 12
MPA-09	Pre Amplifier	Agilent	8447D	2944A10845	RE	2012/09/11 * 12

The expiration date of the calibration is the end of the expired month.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

Test Item: RE: Radiated Emission

AT: Antenna Terminal Conducted test

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124