




EMI TEST REPORT


Test Report No. : 12720228H-C-R1


Applicant : DENSO TEN Limited
Type of Equipment : Car Audio
Model No. : FT0106B
FCC ID : BABFT0106B
Test regulation : FCC Part 15 Subpart B: 2017 Class B
ICES-003 Issue 6: 2016 + Amendment 1: 2017 Class B
Test Result : Complied (Refer to SECTION 3.2)

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report covers EMC technical requirements. It does not cover administrative issues such as Manual or non-EMC test related Requirements. (if applicable)
6. The all test items in this test report are conducted by UL Japan, Inc. Ise EMC Lab.
7. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.
8. The information provided from the customer for this report is identified in SECTION 1.
9. This report is a revised version of 12720228H-C. 12720228H-C is replaced with this report.

Date of test: February 2 and 19, 2019

Representative test engineer: 
Takumi Shimada
Engineer
Consumer Technology Division

Approved by: 
Tsubasa Takayama
Reader
Consumer Technology Division

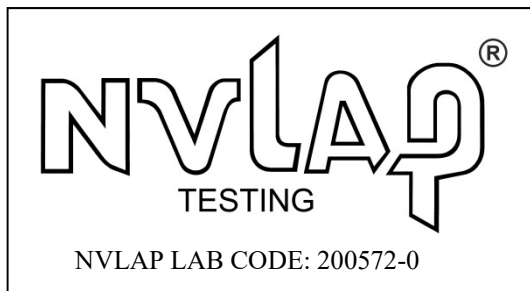

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation. *As for the range of Accreditation in NVLAP, you may refer to the WEB address, http://japan.ul.com/resources/emc_accredited/

- The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan.
 There is no testing item of "Non-accreditation".

UL Japan, Inc.
Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8999
Facsimile : +81 596 24 8124

CONTENTS	PAGE
SECTION 1: Customer information.....	4
SECTION 2: Equipment under test (E.U.T.).....	4
SECTION 3: Test specification, procedures & results.....	6
SECTION 4: Operation of E.U.T. during testing.....	9
SECTION 5: Radiated Emission.....	11
SECTION 6: Antenna Terminal	13
APPENDIX 1: Test data	14
Radiated Emission.....	14
Antenna Terminal Conducted Emission.....	21
APPENDIX 2: Test instruments	27
APPENDIX 3: Photographs of test setup	28
Radiated Emission.....	28

SECTION 1: Customer information

Company Name : DENSO TEN Limited
Address : 2-28, Gosho-dori 1-Chome, Hyogo-ku, Kobe, 652-8510 JAPAN
Telephone Number : +81-78-682-2159
Facsimile Number : +81-78-671-7160
Contact Person : DAISUKE FUKII

The information provided from the customer is as follows;

- Applicant, Type of Equipment, Model No. on the cover and other relevant pages
- SECTION 1: Customer information
- SECTION 2: Equipment under test (E.U.T.)
- SECTION 4: Operation of E.U.T. during testing

* The laboratory is exempted from liability of any test results affected from the above information in SECTION 2 and 4.

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : Car Audio
Model No. : FT0106B
Serial No. : Refer to Section 4, Clause 4.2
Rating : DC 12 V
Receipt Date of Sample : January 30, 2019
(Information from test lab.)
Country of Mass-production : Mexico, Japan
Condition of EUT : Production prototype
(Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT : No Modification by the test lab

2.2 Product Description

Model: FT0106B (referred to as the EUT in this report) is a Car Audio.

General Specification

Clock frequency(ies) : 1495.780 MHz (Main), 48.75 MHz (WLAN), 2.955 MHz (BT)
Operating Temperature : -20 deg. C- +65 deg. C

Radio Specification

WLAN (IEEE802.11b/g/n-20)

Radio Type : Transceiver
Frequency of Operation : 2412 MHz - 2462 MHz
Modulation : DSSS/OFDM
Antenna type : Inverted F Antenna
Antenna Gain : 0.96 dBi

Bluetooth (Ver.4.1 + EDR)

Equipment Type : Transceiver
Frequency of Operation : 2402 MHz - 2480 MHz
Type of Modulation : FHSS, GFSK, $\pi/4$ DQPSK, 8 DPSK
Antenna Type : Inverted F Antenna
Antenna Gain : 0.96 dBi

GPS Receiver

Type of Receiver : GPS Receiver
Frequency of Operation : 1575.42 MHz
Modulation : DSSS
Antenna type : GPS Antenna
Antenna Gain : 29 dBi

Broadcast Receiver

Radio Type : Receiver
Frequency of Operation : AM/HD_AM: 530 kHz - 1710 kHz
FM/RBDS/HD_FM: 87.75 MHz - 107.9 MHz
XM: 2332.25 MHz - 2345 MHz
Channel spacing : AM/HD_AM: 10 kHz
FM/RBDS/HD_FM: 0.02 MHz
Antenna connector type : HFC III

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part 15 Subpart B
FCC Part 15 final revised on March 12, 2018 and effective April 11, 2018

Title : FCC 47CFR Part15 Radio Frequency Device
Subpart B Unintentional Radiators

Test specification : ICES-003 Issue 6: 2016 + Amendment 1: 2017
Title : Spectrum Management and Telecommunications
Interference-Causing Equipment Standard
Information Technology Equipment (Including Digital Apparatus) -
Limits and Methods of Measurement

*Also the EUT complies with FCC Part 15 Subpart C / RSS-Gen and RSS-247.

3.2 Procedures and results

Item	Test Procedure	Limits	Deviation	Worst margin	Result
Conducted emission	FCC: ANSI C63.4: 2014 7. AC power - line conducted emission measurements IEEE 187: 2003 ----- IC: ICES-003 Issue 6: 2016 + Amendment 1: 2017	Class B	N/A *1)	-	N/A
Radiated emission	FCC: ANSI C63.4: 2014 8. Radiated emission measurements IEEE 187: 2003 ----- IC: ICES-003 Issue 6: 2016 + Amendment 1: 2017	Class B	N/A	12.2 dB 924.002 MHz, Vertical	Complied a)
Antenna Terminal	FCC: ANSI C63.4: 2014 12. Measurement of unintentional radiators other than ITE IEEE 187: 2003 ----- IC: -	Class B	N/A	12.83 dB 2424.500 MHz	Complied b)
<p>*Note: UL Japan, Inc's EMI Work Procedure 13-EM-W0420. *1) The test is not applicable since the EUT is not the device that is designed to be connected to the public utility (AC) power line.</p> <p>a) Refer to APPENDIX 1 (data of Radiated Emission) b) Refer to APPENDIX 1 (data of Antenna Terminal Conducted Emission)</p> <p>Symbols: Complied The data of this test item has enough margin, more than the measurement uncertainty. Complied# The data of this test item meets the limits unless the measurement uncertainty is taken into consideration.</p>					

3.3 Addition to standard

No addition, exclusion nor deviation has been made from the standard.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

3.4 Uncertainty

There is no applicable rule of uncertainty in this applied standard. Therefore, the following results are derived depending on whether or not laboratory uncertainty is applied.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k = 2$.

Radiated emission

Measurement distance	Frequency range	Uncertainty (+/-)
3 m	30 MHz to 200 MHz (Horizontal) (Vertical)	4.8 dB
		5.0 dB
	200 MHz to 1000 MHz (Horizontal) (Vertical)	5.2 dB
		6.3 dB
3 m	1 GHz to 6 GHz	5.0 dB
	6 GHz to 18 GHz	5.3 dB
1 m	10 GHz to 26.5 GHz	5.8 dB
	26.5 GHz to 40 GHz	5.8 dB
10 m	1 GHz to 18 GHz	5.2 dB

Antenna Terminal test

Test Item	Uncertainty (+/-)
Antenna terminal conducted emission / Power density / Burst power	2.7 dB

3.5 Test Location

UL Japan, Inc. Ise EMC Lab.
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone: +81 596 24 8999, Facsimile: +81 596 24 8124
NVLAP Lab. code: 200572-0 / FCC Test Firm Registration Number: 199967

Test site	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	2973C-1	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	2973C-2	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	2973C-3	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	-	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	2973C-4	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	-	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	-	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.6 shielded room	-	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	-	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	-	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	-	3.1 x 5.0 x 2.7	3.1 x 5.0	-	-
No.9 measurement room	-	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.11 measurement room	-	6.2 x 4.7 x 3.0	4.8 x 4.6	-	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 m x 2.0 m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

3.6 Test data, Test instruments, and Test set up


Refer to APPENDIX.

SECTION 4: Operation of E.U.T. during testing

4.1 Operating Mode(s)

The mode(s) : 1. USB Play mode: Radiated Emission test only
2. FM Receiving mode: Radiated Emission test only (Local / Other)
3. FM Tuning mode (Antenna port A / B): Antenna Terminal Conducted test only

4.2 Configuration and peripherals

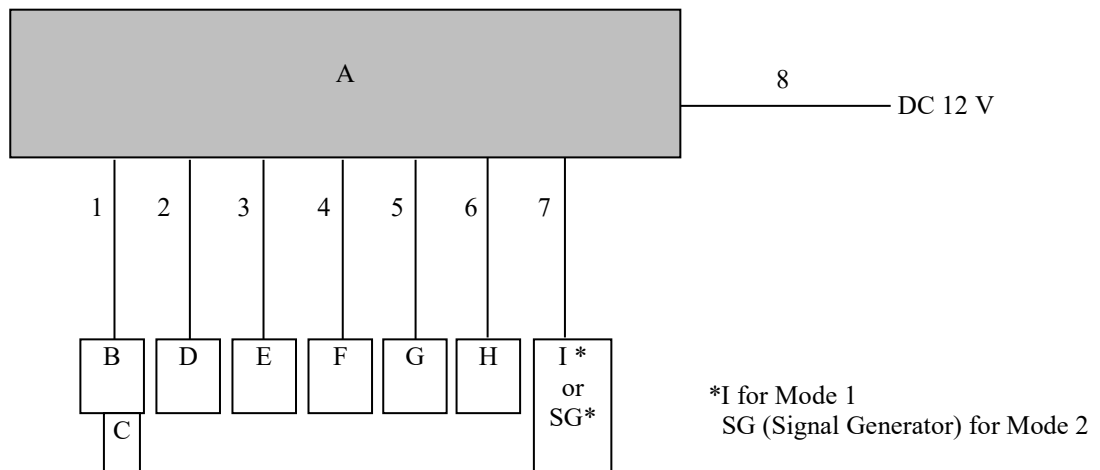

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Car Audio	FT0106B	AQ800005	DENSO TEN Limited	EUT
B	USB/Audio Connector	-	-	-	-
C	USB Memory	USM4GR	17116DGGNN	Sony	-
D	ANT-AMP	-	863C0-06010	-	-
E	GPS Antenna	-	-	-	-
F	Microphone	-	317616010-017	-	-
G	Camera	-	317616007-001	-	-
H	Steering switch	-	-	-	-
I	Radio-ANT-AMP	NKB02917	86300-33330	-	-

List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	USB Cable	2.0	Shielded	Shielded	-
2	Signal Cable	6.3	Unshielded	Unshielded	-
3	Signal Cable	0.5	Unshielded	Unshielded	-
4	Signal Cable	3.2	Unshielded	Unshielded	-
5	Signal Cable	3.5	Unshielded	Unshielded	-
6	Signal Cable	3.5	Unshielded	Unshielded	-
7	Signal Cable	2.7	Unshielded	Unshielded	-
8	DC Cable	5.0	Unshielded	Unshielded	-

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 5: Radiated Emission

5.1 Operating environment

Test place : No.3 semi anechoic chamber
Temperature : See data
Humidity : See data

5.2 Test configuration

EUT was placed on a urethane platform of nominal size, 1.0 m by 2.0 m, raised 0.8 m above the conducting ground plane.

The rear of EUT and peripherals was aligned and flushed with rear of tabletop.

Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

Photographs of the set up are shown in APPENDIX 3.

5.3 Test conditions

Frequency range : 30 MHz - 200 MHz (Biconical antenna) / 200 MHz - 1000 MHz (Logperiodic antenna)
1000 MHz - 26500 MHz (Horn antenna)
Test distance : 3 m
EUT position : Table top
EUT operation mode : See Clause 4.1

5.4 Test procedure

The height of the measuring antenna varied between 1 and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver.

The radiated emission measurements were made with the following detector function of the Test Receiver.

For Mode 3, test was performed under the condition that signal of FM 98 MHz from Signal Generator was input to the EUT.

The test of Local oscillator spurious has been measured up to appropriate frequency based on the result of the antenna terminal test.

Frequency	Below 1 GHz	Above 1 GHz *1)
Instrument used	Test Receiver	Spectrum Analyzer
IF Bandwidth	QP: BW 120 kHz	PK: RBW: 1 MHz / VBW: 3 MHz AV *2): RBW: 1 MHz / VBW: 10 Hz


*1) The measurement data was adjusted to a 3 m distance using the following Distance Factor.

Distance Factor: $20 \times \log(3.3 \text{ m} / 3 \text{ m}) = 0.83 \text{ dB}$

*2) When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

Figure 1: Test Setup


Below 1 GHz

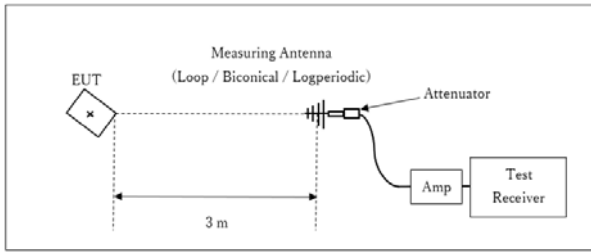

× : Center of turn table

Test Distance: 3 m

1 GHz - 10 GHz

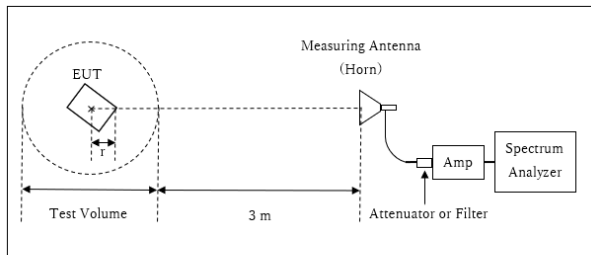


r : Radius of an outer periphery of EUT
 × : Center of turn table

Distance Factor: $20 \times \log(3.3 \text{ m} / 3.0 \text{ m}) = 0.83 \text{ dB}$
 * Test Distance: $(3 + \text{Test Volume} / 2) - r = 3.3 \text{ m}$

Test Volume : 2.0 m
 (Test Volume has been calibrated based on CISPR 16-1-4.)
 $r = 0.7 \text{ m}$

10 GHz – 26.5 GHz

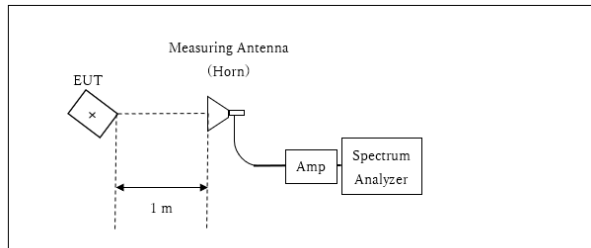

× : Center of turn table

Distance Factor: $20 \times \log(1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$
 *Test Distance: 1 m

The test was made on EUT at the normal use position.

5.5 Test result

Summary of the test results: Pass

The limit is rounded down to one decimal place.

The test result is rounded off to one or two decimal places, so some differences might be observed.

Date: February 2, 2019
 February 19, 2019

Test engineer: Tomoki Matsui
 Koji Yamamoto

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 6: Antenna Terminal

6.1 Operating environment

Test place : No.3 Semi anechoic chamber
Temperature : See data
Humidity : See data

6.2 Test configuration

EUT was placed on a wooden table of nominal size, 1.0 m by 1.5 m, raised 0.8 m from the ground.

6.3 Test conditions

Frequency range : 30 MHz - 1000 MHz / 1000 MHz - 26500 MHz
Test distance : N / A
EUT position : Table top
EUT operation mode : See Clause 4.1

6.4 Test procedure

The Antenna Terminal was measured with a spectrum analyzer connected to the antenna port.

Frequency	Below 1 GHz	Above 1 GHz
Instrument used	Spectrum Analyzer	Spectrum Analyzer
IF Bandwidth	PK: RBW: 100 kHz / VBW: 300 kHz	PK: RBW: 1 MHz / VBW: 3 MHz

6.5 Test result

Summary of the test results: Pass

Date: February 19, 2019


Test engineer: Takumi Shimada

APPENDIX 1: Test data

Radiated Emission

Report No. 12720228H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.3
Date February 2, 2019
Temperature / Humidity 20 deg. C / 32% RH
Engineer Tomoki Matsui
(Below 1 GHz)
Mode Mode 1

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK
Except for the data below : adequate margin data below the limits.

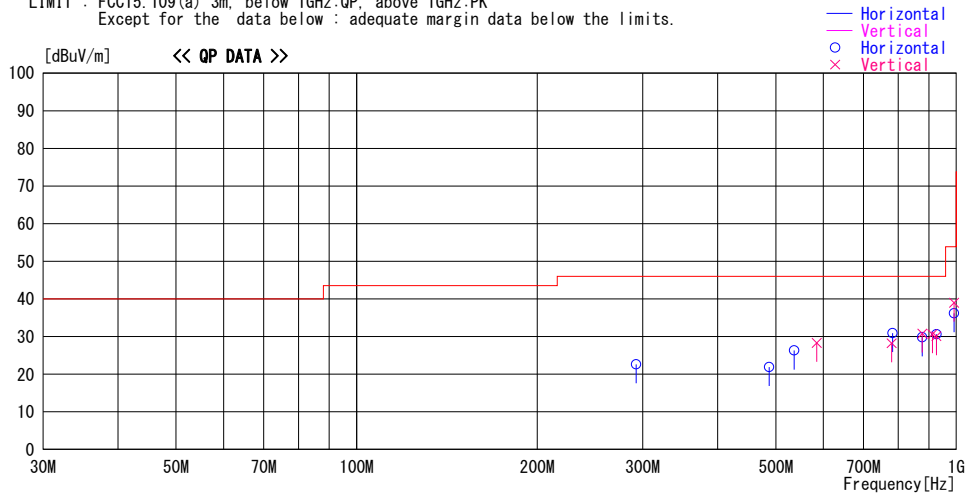

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level	Angle	Height	Polar.	Limit	Margin	Comment
			Factor	Gain					[dBuV/m]	[dB]	
292.498	31.2	QP	13.5	-22.1	22.6	122	100	Hori.	46.0	23.4	
487.493	25.2	QP	17.5	-20.8	21.9	204	100	Hori.	46.0	24.1	
536.244	29.2	QP	17.6	-20.5	26.3	126	189	Hori.	46.0	19.7	
584.996	29.7	QP	18.8	-20.2	28.3	0	100	Vert.	46.0	17.7	
779.998	26.0	QP	20.8	-18.6	28.2	304	145	Vert.	46.0	17.8	
782.998	28.6	QP	20.9	-18.6	30.9	87	100	Hori.	46.0	15.1	
877.495	25.3	QP	22.1	-17.6	29.8	224	100	Hori.	46.0	16.2	
877.496	26.3	QP	22.1	-17.6	30.8	12	107	Vert.	46.0	15.2	
911.996	25.7	QP	22.1	-17.2	30.6	189	123	Vert.	46.0	15.4	
926.244	25.6	QP	22.1	-17.1	30.6	294	100	Hori.	46.0	15.4	
926.246	25.1	QP	22.1	-17.1	30.1	0	121	Vert.	46.0	15.9	
991.245	33.0	QP	22.4	-16.4	39.0	183	118	Vert.	53.9	14.9	
991.245	30.2	QP	22.4	-16.4	36.2	80	100	Hori.	53.9	17.7	


CHART: WITH FACTOR

ANT TYPE: - 30 MHz: LOOP, 30 MHz - 200 MHz: BICONICAL, 200 MHz - 1000 MHz: LOGPERIODIC, 1000 MHz -: HORN
CALCULATION: RESULT = READING + ANT FACTOR + LOSS & GAIN (CABLE + ATT - GAIN(AMP))

Radiated emission

Report No. 12720228H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.3
Date February 2, 2019
Temperature / Humidity 20 deg. C / 32% RH
Engineer Tomoki Matsui
(Above 1 GHz)
Mode Mode 1

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK
FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:AV

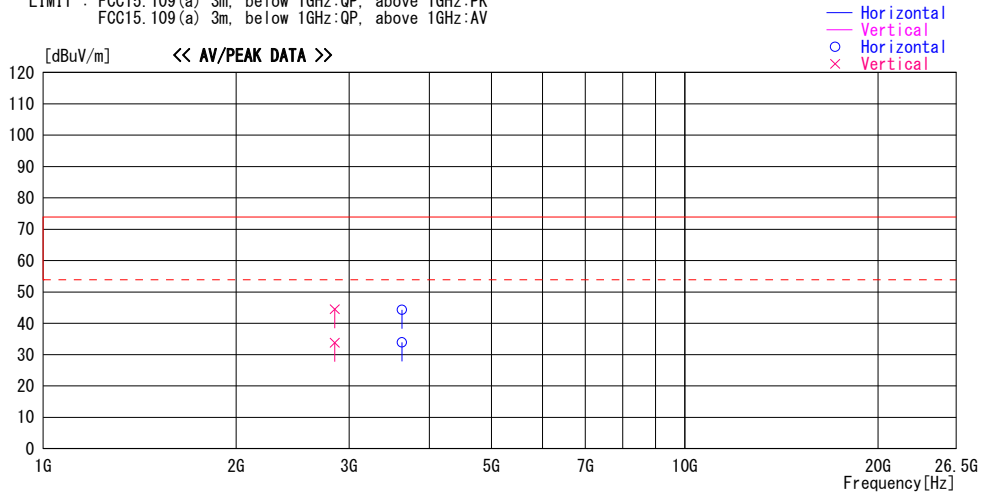

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level [dBuV/m]	Angle [Deg]	Height [cm]	Polar.	Limit	Margin	Comment
			Factor [dB/m]	Gain [dB]					[dBuV/m]	[dB]	
2849.562	44.2	PK	29.1	-28.8	44.5	207	100	Vert.	73.9	29.4	
2849.562	33.5	AV	29.1	-28.8	33.8	207	100	Vert.	53.9	20.1	
3626.614	42.7	PK	29.7	-28.1	44.3	217	100	Hori.	73.9	29.6	
3626.614	32.3	AV	29.7	-28.1	33.9	217	100	Hori.	53.9	20.0	


CHART: WITH FACTOR

ANT TYPE: - 30 MHz: LOOP, 30 MHz - 200 MHz: BICONICAL, 200 MHz - 1000 MHz: LOGPERIODIC, 1000 MHz -: HORN
CALCULATION: RESULT = READING + ANT FACTOR + LOSS & GAIN (CABLE - GAIN(AMP) + D-factor)

Radiated emission

Report No. 12720228H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.3
Date February 19, 2019
Temperature / Humidity 22 deg. C / 34% RH
Engineer Koji Yamamoto
(Below 1 GHz)
Mode Mode 2 Local

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK
All other spurious emissions were less than 20dB for the limit.

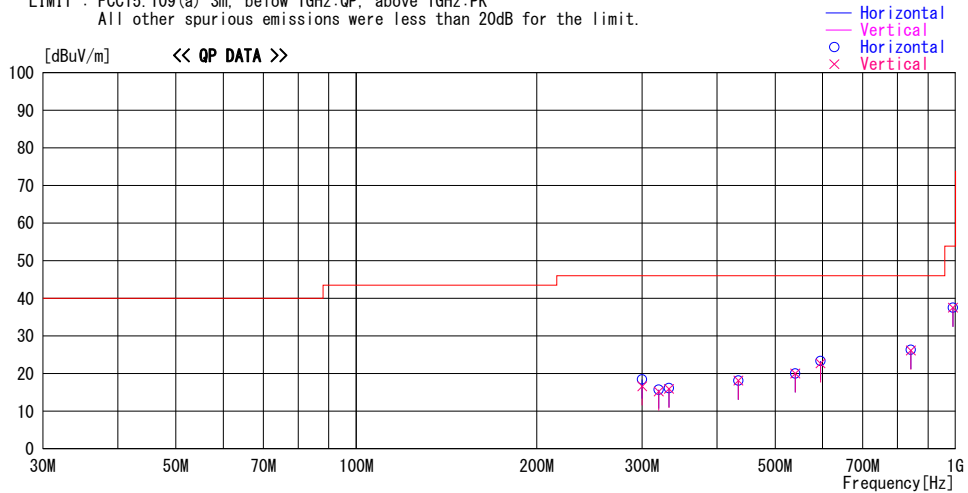

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level [dBuV/m]	Angle [Deg.]	Height [cm]	Polar.	Limit	Margin	Comment
			Factor [dB/m]	Gain [dB]					[dBuV/m]	[dB]	
300.000	26.5	QP	13.7	-21.8	18.4	327	146	Hori.	46.0	27.6	
300.000	24.7	QP	13.7	-21.8	16.6	137	100	Vert.	46.0	29.4	
319.833	22.7	QP	14.2	-21.7	15.2	0	100	Vert.	46.0	30.8	
319.833	23.2	QP	14.2	-21.7	15.7	74	100	Hori.	46.0	30.3	
332.667	22.7	QP	14.8	-21.6	15.9	0	100	Vert.	46.0	30.1	
332.667	22.9	QP	14.8	-21.6	16.1	0	100	Hori.	46.0	29.9	
434.167	22.6	QP	16.5	-21.0	18.1	0	100	Vert.	46.0	27.9	
434.167	22.6	QP	16.5	-21.0	18.1	0	100	Hori.	46.0	27.9	
540.333	22.7	QP	17.6	-20.3	20.0	0	100	Vert.	46.0	26.0	
540.333	22.7	QP	17.6	-20.3	20.0	0	100	Hori.	46.0	26.0	
595.167	23.6	QP	19.1	-20.0	22.7	243	100	Vert.	46.0	23.3	
595.167	24.2	QP	19.1	-20.0	23.3	140	100	Hori.	46.0	22.7	
842.500	22.4	QP	21.5	-17.8	26.1	0	100	Vert.	46.0	19.9	
842.500	22.6	QP	21.5	-17.8	26.3	293	100	Hori.	46.0	19.7	
990.667	31.4	QP	22.4	-16.3	37.5	187	100	Vert.	53.9	16.4	
990.667	31.4	QP	22.4	-16.3	37.5	66	100	Hori.	53.9	16.4	


CHART: WITH FACTOR

ANT TYPE: - 30 MHz: LOOP, 30 MHz - 200 MHz: BICONICAL, 200 MHz - 1000 MHz: LOGPERIODIC, 1000 MHz -: HORN
CALCULATION: RESULT = READING + ANT FACTOR + LOSS & GAIN (CABLE + ATT - GAIN(AMP))

Radiated emission

Report No. 12720228H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.3
Date February 2, 2019
Temperature / Humidity 20 deg. C / 32% RH
Engineer Tomoki Matsui
(Below 1 GHz)
Mode Mode 2 Other

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK
Except for the data below : adequate margin data below the limits.

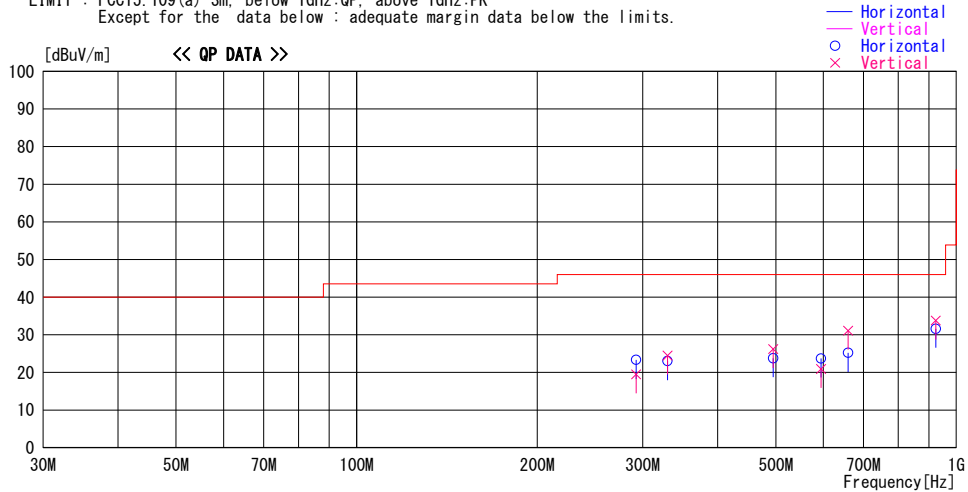

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level [dBuV/m]	Angle [Deg]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]	Comment
			Factor [dB/m]	Gain [dB]							
292.499	31.9	QP	13.5	-22.1	23.3	124	100	Hori.	46.0	22.7	
292.499	28.1	QP	13.5	-22.1	19.5	322	100	Vert.	46.0	26.5	
330.004	30.1	QP	14.7	-21.8	23.0	227	221	Hori.	46.0	23.0	
330.004	31.6	QP	14.7	-21.8	24.5	54	100	Vert.	46.0	21.5	
495.002	26.9	QP	17.6	-20.7	23.8	119	164	Hori.	46.0	22.2	
495.002	29.3	QP	17.6	-20.7	26.2	4	100	Vert.	46.0	19.8	
594.745	21.9	QP	19.1	-20.1	20.9	31	100	Vert.	46.0	25.1	
594.745	24.7	QP	19.1	-20.1	23.7	294	100	Hori.	46.0	22.3	
660.000	31.3	QP	19.5	-19.7	31.1	160	100	Vert.	46.0	14.9	
660.000	25.4	QP	19.5	-19.7	25.2	96	100	Hori.	46.0	20.8	
924.002	26.6	QP	22.1	-17.1	31.6	119	143	Hori.	46.0	14.4	
924.002	28.8	QP	22.1	-17.1	33.8	165	100	Vert.	46.0	12.2	


CHART: WITH FACTOR

ANT TYPE: - 30 MHz: LOOP, 30 MHz - 200 MHz: BICONICAL, 200 MHz - 1000 MHz: LOGPERIODIC, 1000 MHz -: HORN
CALCULATION: RESULT = READING + ANT FACTOR + LOSS & GAIN (CABLE + ATT - GAIN(AMP))

Radiated emission

Report No. 12720228H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.3
Date February 19, 2019
Temperature / Humidity 22 deg. C / 34% RH
Engineer Koji Yamamoto
(1 GHz - 10 GHz)
Mode Mode 2 Local

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK
FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:AV

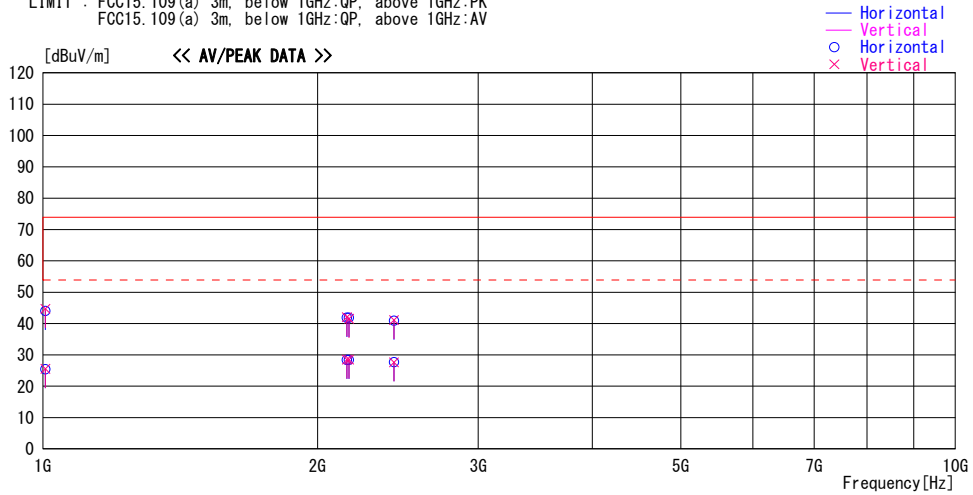

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level [dBuV/m]	Angle [Deg]	Height [cm]	Polar.	Limit	Margin	Comment
			Factor [dB/m]	Gain [dB]					[dBuV/m]	[dB]	
1006.167	52.3	PK	24.6	-32.9	44.0	271	100	Hor.i.	73.9	29.9	
1006.167	53.0	PK	24.6	-32.9	44.7	20	100	Vert.	73.9	29.2	
1006.167	33.7	AV	24.6	-32.9	25.4	271	100	Hor.i.	53.9	28.5	
1006.167	33.8	AV	24.6	-32.9	25.5	20	100	Vert.	53.9	28.4	
2153.167	42.8	PK	28.8	-29.8	41.8	0	100	Hor.i.	73.9	32.1	
2153.167	43.0	PK	28.8	-29.8	42.0	0	100	Vert.	73.9	31.9	
2153.167	29.4	AV	28.8	-29.8	28.4	0	100	Hor.i.	53.9	25.5	
2153.167	29.5	AV	28.8	-29.8	28.5	0	100	Vert.	53.9	25.4	
2165.500	43.2	PK	28.4	-29.8	41.8	0	100	Hor.i.	73.9	32.1	
2165.500	42.9	PK	28.4	-29.8	41.5	0	100	Vert.	73.9	32.4	
2165.500	29.8	AV	28.4	-29.8	28.4	0	100	Hor.i.	53.9	25.5	
2165.500	29.9	AV	28.4	-29.8	28.5	0	100	Vert.	53.9	25.4	
2424.500	42.7	PK	27.6	-29.4	40.9	0	100	Hor.i.	73.9	33.0	
2424.500	42.9	PK	27.6	-29.4	41.1	0	100	Vert.	73.9	32.8	
2424.500	29.4	AV	27.6	-29.4	27.6	0	100	Hor.i.	53.9	26.3	
2424.500	29.4	AV	27.6	-29.4	27.6	0	100	Vert.	53.9	26.3	

CHART: WITH FACTOR

ANT TYPE: - 30 MHz: LOOP, 30 MHz - 200 MHz: BICONICAL, 200 MHz - 1000 MHz: LOGPERIODIC, 1000 MHz -: HORN
CALCULATION: RESULT = READING + ANT FACTOR + LOSS & GAIN (CABLE - GAIN(AMP) + D-factor)


UL Japan, Inc.
Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8999
Facsimile : +81 596 24 8124

Radiated emission

Report No. 12720228H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.3
Date February 19, 2019
Temperature / Humidity 22 deg. C / 34% RH
Engineer Koji Yamamoto
(10 GHz - 26.5 GHz)
Mode Mode 2 Local

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK
FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:AV

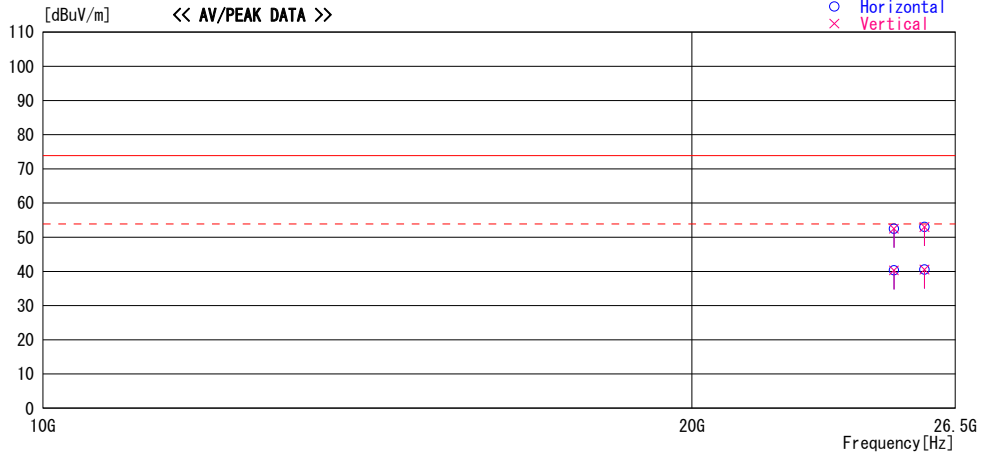

Frequency [MHz]	Reading [dBuV]	DET	Antenna		Level [dBuV/m]	Angle [Deg]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]	Comment
			Factor [dB/m]	Loss& Gain [dB]							
24814.170	47.4	PK	37.5	-32.4	52.5	0	100	Hori.	73.9	21.4	
24814.170	47.4	PK	37.5	-32.4	52.5	0	100	Vert.	73.9	21.4	
24814.170	35.2	AV	37.5	-32.4	40.3	0	100	Hori.	53.9	13.6	
24814.170	35.2	AV	37.5	-32.4	40.3	0	100	Vert.	53.9	13.6	
25635.830	47.0	PK	37.7	-31.7	53.0	0	100	Hori.	73.9	20.9	
25635.830	47.0	PK	37.7	-31.7	53.0	0	100	Vert.	73.9	20.9	
25635.830	34.5	AV	37.7	-31.7	40.5	0	100	Hori.	53.9	13.4	
25635.830	34.5	AV	37.7	-31.7	40.5	0	100	Vert.	53.9	13.4	


CHART: WITH FACTOR

ANT TYPE: - 30 MHz: LOOP, 30 MHz - 200 MHz: BICONICAL, 200 MHz - 1000 MHz: LOGPERIODIC, 1000 MHz -: HORN
CALCULATION: RESULT = READING + ANT FACTOR + LOSS & GAIN (CABLE - GAIN(AMP) + D-factor)

Radiated emission

Report No. 12720228H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.3
Date February 2, 2019
Temperature / Humidity 20 deg. C / 32% RH
Engineer Tomoki Matsui
(Above 1 GHz)
Mode Mode 2 other

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK
FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:AV

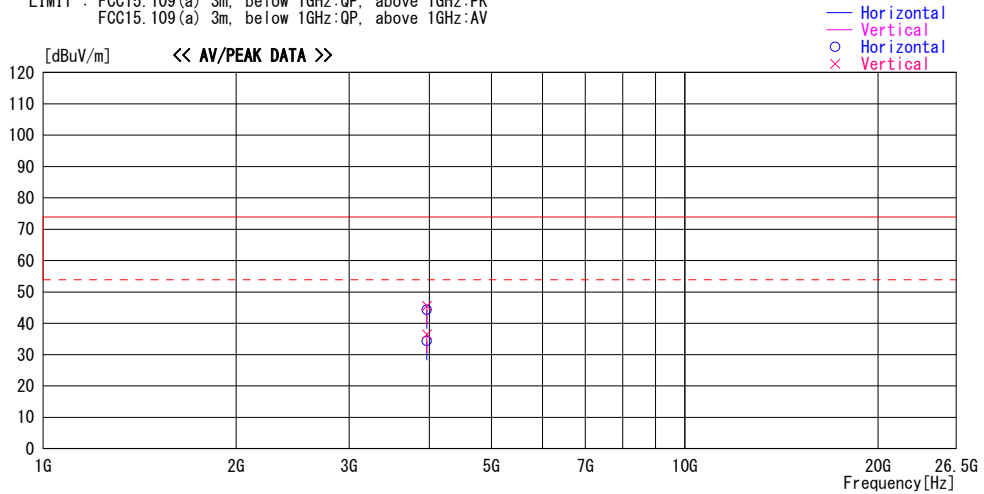

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level [dBuV/m]	Angle [Deg]	Height [cm]	Polar.	Limit	Margin	Comment
			Factor [dB/m]	Gain [dB]					[dBuV/m]	[dB]	
3964.935	42.2	PK	30.0	-27.9	44.3	179	100	Hori.	73.9	29.6	
3964.935	43.4	PK	30.0	-27.9	45.5	177	100	Vert.	73.9	28.4	
3964.935	34.4	AV	30.0	-27.9	36.5	177	100	Vert.	53.9	17.4	
3964.935	32.2	AV	30.0	-27.9	34.3	179	100	Hori.	53.9	19.6	

CHART: WITH FACTOR


ANT TYPE: - 30 MHz: LOOP, 30 MHz - 200 MHz: BICONICAL, 200 MHz - 1000 MHz: LOGPERIODIC, 1000 MHz -: HORN
CALCULATION: RESULT = READING + ANT FACTOR + LOSS & GAIN (CABLE - GAIN(AMP) + D-factor)

Antenna Terminal Conducted Emission (Antenna Port A)

UL Japan, Inc. Ise EMC Lab. No.3 Semi Anechoic Chamber

Report No. : **12720228H**
Temp/Humi : 23 deg. C / 47 % RH
Engineer : Takumi Shimada

MODE : **Mode 3**
Limit : FCC15.111 Antenna terminal measurement

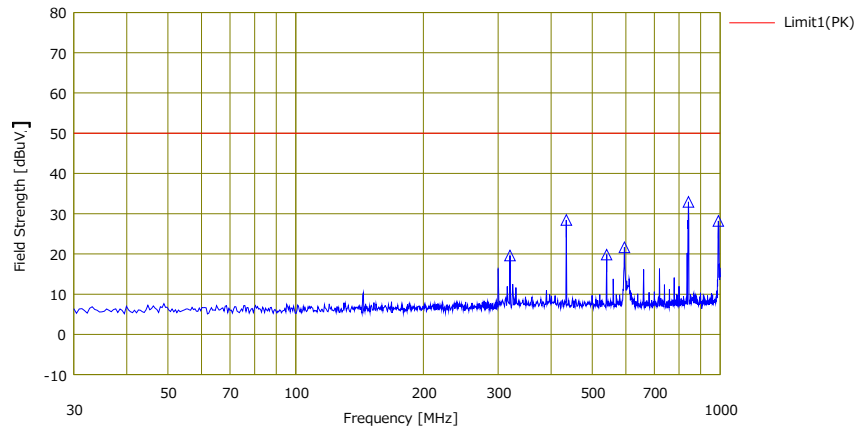

No.	Freq. [MHz]	Reading	Ant.Fac [dB/m]	Loss [dB]	Gain [dB]	Result		Margin [dB]	Pda. [H/V]	Ant. Type	Comment
		[dBuV]				[dB]	[dBuV]				
1	319.833	40.84	0.00	6.00	27.82	19.62	50.00	30.38	-	-	
2	434.167	50.32	0.00	6.83	28.70	28.45	50.00	21.55	-	-	
3	540.333	42.13	0.00	6.88	29.19	19.82	50.00	30.18	-	-	
4	595.167	44.03	0.00	6.86	29.26	21.63	50.00	28.37	-	-	
5	842.500	54.83	0.00	7.04	28.93	32.94	50.00	17.06	-	-	
6	990.667	49.57	0.00	7.17	28.53	28.21	50.00	21.79	-	-	

*1) 2nW = -57dBm = 50dBuV

CALCULATION: RESULT = READING + LOSS (CABLE + ATTEN.) - GAIN(AMP)


*The test result is rounded off to one or two decimal places, so some differences might be observed.

Antenna Terminal Conducted Emission (Antenna Port A)

UL Japan, Inc. Ise EMC Lab. No.3 Semi Anechoic Chamber

Report No. : 12720228H
 Temp/Humi : 23 deg. C / 47 % RH
 Engineer : Takumi Shimada

MODE : **Mode 3**
 Limit : FCC15.111 Antenna terminal measurement

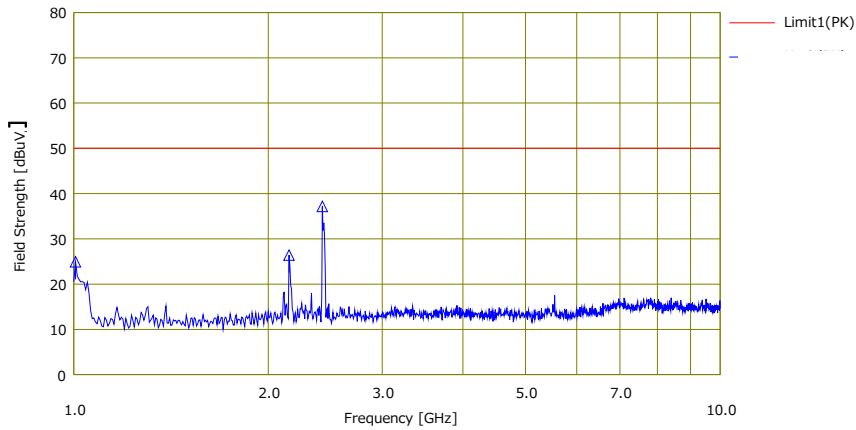

No.	Freq. [MHz]	Reading	Ant.Fac [dB/m]	Loss [dB]	Gain [dB]	Result		Margin [dB]	Pda. [H/V]	Ant. Type	Comment
		[dBuV]				[dB]	[dBuV]				
1	1006.167	57.33	0.00	1.64	34.05	24.92	50.00	25.08	-	-	
2	2153.167	55.39	0.00	2.45	31.45	26.39	50.00	23.61	-	-	
3	2424.500	65.90	0.00	2.60	31.33	37.17	50.00	12.83	-	-	

*1) 2nW = -57dBm = 50dBuV

CALCULATION: RESULT = READING + LOSS (CABLE + ATTEN.) - GAIN(AMP)

*The test result is rounded off to one or two decimal places, so some differences might be observed.


Antenna Terminal Conducted Emission (Antenna Port A)

UL Japan, Inc. Ise EMC Lab. No.3 Semi Anechoic Chamber

Report No. : 12720228H
 Temp/Humi : 23 deg. C / 47 % RH
 Engineer : Takumi Shimada

MODE : **Mode 3**

Limit : FCC15.111 Antenna terminal measurement

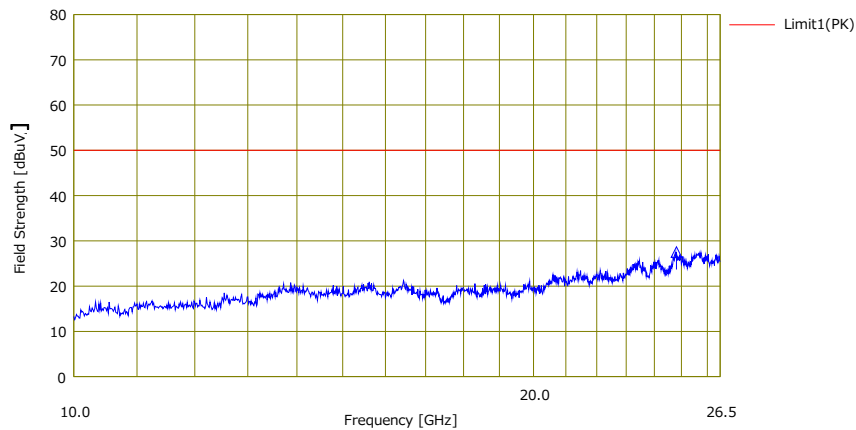

No.	Freq. [MHz]	Reading	Ant.Fac [dB/m]	Loss [dB]	Gain [dB]	Result		Margin [dB]	Pda. [H/V]	Ant. Type	Comment
		[dBuV]				[dBuV]	[dB]				
1	2481.4170	50.32	0.00	9.30	32.09	27.53	50.00	22.47	-	-	

*1) 2nW = -57dBm = 50dBuV

CALCULATION: RESULT = READING + LOSS (CABLE + ATTEN.) - GAIN(AMP)


*The test result is rounded off to one or two decimal places, so some differences might be observed.
 *No signal was detected above 26.5 GHz.

Antenna Terminal Conducted Emission (Antenna Port B)

UL Japan, Inc. Ise EMC Lab. No.3 Semi Anechoic Chamber

Report No. **12720228H**
 Temp/Humi : 23 deg. C / 47 % RH
 Engineer : Takumi Shimada

MODE : **Mode 3**
 Limit : FCC15.111 Antenna terminal measurement

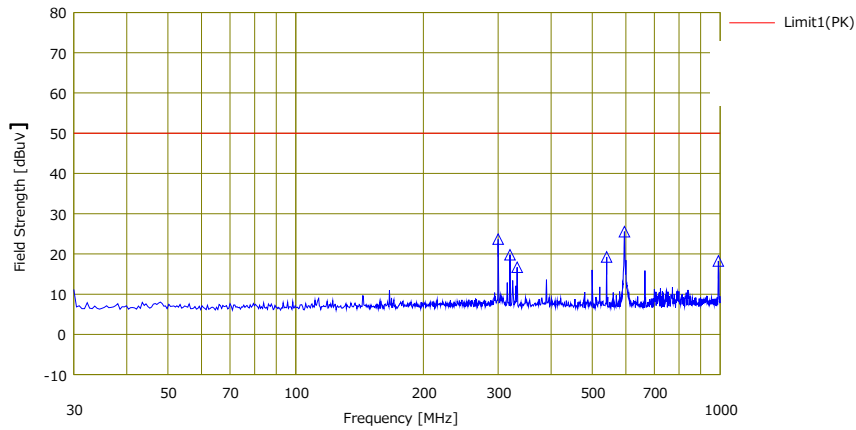

No.	Freq. [MHz]	Reading	Ant.Fac [dB/m]	Loss [dB]	Gain [dB]	Result		Margin [dB]	Pda. [H/V]	Ant. Type	Comment
		[dBuV]				(PK)	(PK)				
1	300.000	44.62	0.00	6.56	27.69	23.68	50.00	26.32	-	-	
2	319.833	41.01	0.00	6.60	27.82	19.79	50.00	30.21	-	-	
3	332.667	37.96	0.00	6.64	27.91	16.68	50.00	33.32	-	-	
4	540.333	41.55	0.00	6.88	29.19	19.24	50.00	30.76	-	-	
5	595.167	47.93	0.00	6.86	29.26	25.53	50.00	24.47	-	-	
6	990.667	39.60	0.00	7.17	28.53	18.24	50.00	31.76	-	-	

*1) 2nW = -57dBm = 50dBuV

CALCULATION: RESULT = READING + LOSS (CABLE + ATTEN.) - GAIN(AMP)

*The test result is rounded off to one or two decimal places, so some differences might be observed.


Antenna Terminal Conducted Emission (Antenna Port B)

UL Japan, Inc. Ise EMC Lab. No.3 Semi Anechoic Chamber

Report No. : 12720228H
 Temp/Humi : 23 deg. C / 47 % RH
 Engineer : Takumi Shimada

MODE : **Mode 3**

Limit : FCC15.111 Antenna terminal measurement

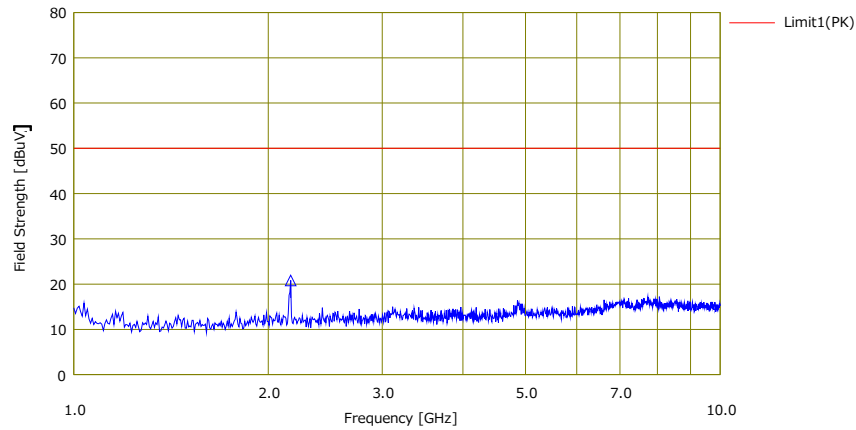

No.	Freq. [MHz]	Reading	Ant.Fac [dB/m]	Loss [dB]	Gain [dB]	Result		Margin [dB]	Pda. [H/V]	Ant. Type	Comment
		[dBuV]				[dBuV]	[dBuV]				
1	2165.500	49.80	0.00	2.46	31.45	20.81	50.00	29.19	-	-	

*1) 2nW = -57dBm = 50dBuV

CALCULATION: RESULT = READING + LOSS (CABLE + ATTEN.) - GAIN(AMP)


*The test result is rounded off to one or two decimal places, so some differences might be observed.

Antenna Terminal Conducted Emission (Antenna Port B)

UL Japan, Inc. Ise EMC Lab. No.3 Semi Anechoic Chamber

Report No. : 12720228H
 Temp/Humi : 23 deg. C / 47 % RH
 Engineer : Takumi Shimada

MODE : **Mode 3**
 Limit : FCC15.111 Antenna terminal measurement

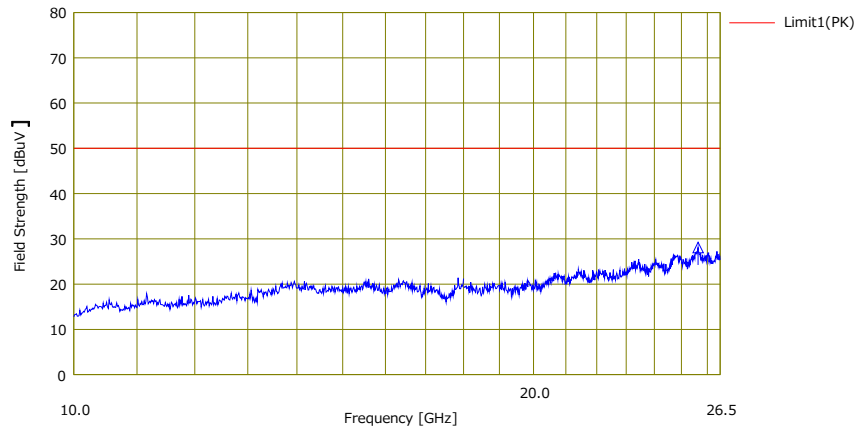

No.	Freq. [MHz]	Reading	Ant.Fac	Loss	Gain	Result	Limit	Margin	Pola.	Ant.	Comment
		[dBuV]	[dB/m]	[dB]	[dB]	[dBuV]	[dBuV]	[dB]	[H/V]	Type	
1	25605830	50.37	0.00	9.36	31.65	28.00	50.00	21.92	-	-	

*1) 2nW = -57dBm = 50dBuV

CALCULATION: RESULT = READING + LOSS (CABLE + ATTEN.) - GAIN(AMP)

*The test result is rounded off to one or two decimal places, so some differences might be observed.
 *No signal was detected above 26.5 GHz.

APPENDIX 2: Test instruments

Test Item	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Calibration Due Date	Cal Int
RE	141424	Biconical Antenna	Schwarzbeck	BBA9106	1915	06/04/2018	06/30/2019	12
RE	142183	Measure	KOMELON	KMC-36	-	-	-	-
RE	148897	Attenuator	KEYSIGHT	8491A	MY52462349	12/20/2018	12/31/2019	12
RE	141554	Thermo-Hygrometer	CUSTOM	CTH-180	1301	01/11/2019	01/31/2020	12
RE	141582	Pre Amplifier	SONOMA INSTRUMENT	310	260834	02/27/2018	02/28/2019	12
RE	142008	AC3_Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	06/26/2018	06/30/2020	24
RE	141152	EMI measurement program	TSJ	TEPTO-DV	-	-	-	-
RE	141532	DIGITAL HiTESTER	HIOKI	3805	51201197	01/29/2019	01/31/2020	12
RE	141323	Coaxial cable	UL Japan	-	-	07/03/2018	07/31/2019	12
RE	141902	Spectrum Analyzer	AGILENT	E4440A	MY46187105	10/04/2018	10/31/2019	12
RE	141949	Test Receiver	Rohde & Schwarz	ESCI	100767	08/06/2018	08/31/2019	12
RE	141266	Logperiodic Antenna(200-1000MHz)	Schwarzbeck	VUSLP9111B	911B-191	06/04/2018	06/30/2019	12
RE	141507	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	258	06/07/2018	06/30/2019	12
RE	141513	Horn Antenna 15-40GHz	Schwarzbeck	BBHA9170	BBHA9170306	06/07/2018	06/30/2019	12
RE	141580	MicroWave System Amplifier	AGILENT	83017A	MY39500779	03/13/2018	03/31/2019	12
RE	141412	Microwave Cable	Junkosha	MWX221	1305S002R(1m) / 1405S146(5m)	06/14/2018	06/30/2019	12
RE	142013	AC3_Semi Anechoic Chamber(SVSWR)	TDK	Semi Anechoic Chamber 3m	DA-10005	04/06/2018	04/30/2019	12
AT	141395	Coaxial Cable	UL Japan	-	-	11/13/2018	11/30/2019	12
AT	141594	Pre Amplifier	AGILENT	8447D	2944A10150	02/12/2019	02/29/2020	12
AT	141392	Microwave Cable	Junkosha	MWX221	1604S253(1 m) / 1608S087(5 m)	08/08/2018	08/31/2019	12
AT	141581	MicroWave System Amplifier	AGILENT	83017A	650	10/04/2018	10/31/2019	12
AT	141899	Spectrum Analyzer	AGILENT	E4448A	MY46180655	08/10/2018	08/31/2019	12
AT	141564	Thermo-Hygrometer	CUSTOM	CTH-201	0004	12/05/2018	12/31/2019	12
AT	141327	Coaxial Cable	UL Japan	-	-	02/07/2019	02/29/2020	12
AT	148898	Attenuator	KEYSIGHT	8491A	MY52462282	10/03/2018	10/31/2019	12
RE	141393	Microwave Cable	Junkosha	MWX221	1604S254(1 m) / 1608S088(5 m)	08/08/2018	08/31/2019	12
RE	141950	EMI Test Receiver	Rohde & Schwarz	ESU26	100412	06/15/2018	06/30/2019	12
RE	141885	Spectrum Analyzer	AGILENT	E4448A	US44300523	11/07/2018	11/30/2019	12

*Hyphens for Last Calibration Date, Calibration Due Date and Cal Int are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

Test item:

RE: Radiated Emission

AT: Antenna Terminal Conducted test

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124