





RADIO TEST REPORT

Test Report No. 15182431H-C-R1

Customer	DENSO TEN Limited
Description of EUT	Car Navigation
Model Number of EUT	TN0022A
FCC ID	BABTN0022A
Test Regulation	FCC Part 15 Subpart E
Test Result	Complied
Issue Date	June 3, 2024
Remarks	Radiated Spurious Emission only * For permissive change

Representative Test Engineer	Approved By
	
Hiroyuki Furutaka Engineer	Ryota Yamanaka Engineer
 	
CERTIFICATE 5107.02	
<input type="checkbox"/> The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan, Inc.	
<input checked="" type="checkbox"/> There is no testing item of "Non-accreditation".	

Report Cover Page - Form-ULID-003532 (DCS:13-EM-F0429) Issue# 23.0

ANNOUNCEMENT

- This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
- The results in this report apply only to the sample tested. (Laboratory was not involved in sampling.)
- This sample tested is in compliance with the limits of the above regulation.
- The test results in this test report are traceable to the national or international standards.
- This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
- This test report covers Radio technical requirements.
It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
- The all test items in this test report are conducted by UL Japan, Inc. Ise EMC Lab.
- The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan, Inc. has been accredited.
- The information provided by the customer for this report is identified in SECTION 1.
- The laboratory is not responsible for information provided by the customer which can impact the validity of the results.
- For test report(s) referred in this report, the latest version (including any revisions) is always referred.

REVISION HISTORY

Original Test Report No. 15182431H-C

This report is a revised version of 15182431H-C. 15182431H-C is replaced with this report.

Revision	Test Report No.	Date	Page Revised Contents
- (Original)	15182431H-C	March 26, 2024	-
1	15182431H-C-R1	June 3, 2024	SECTION 2.2 Radio Specification Deletion of item about DAB

Reference: Abbreviations (Including words undescribed in this report)

A2LA	The American Association for Laboratory Accreditation	ICES	Interference-Causing Equipment Standard
AC	Alternating Current	IEC	International Electrotechnical Commission
AFH	Adaptive Frequency Hopping	IEEE	Institute of Electrical and Electronics Engineers
AM	Amplitude Modulation	IF	Intermediate Frequency
Amp, AMP	Amplifier	ILAC	International Laboratory Accreditation Conference
ANSI	American National Standards Institute	ISED	Innovation, Science and Economic Development Canada
Ant, ANT	Antenna	ISO	International Organization for Standardization
AP	Access Point	JAB	Japan Accreditation Board
ASK	Amplitude Shift Keying	LAN	Local Area Network
Atten., ATT	Attenuator	LIMS	Laboratory Information Management System
AV	Average	MCS	Modulation and Coding Scheme
BPSK	Binary Phase-Shift Keying	MRA	Mutual Recognition Arrangement
BR	Bluetooth Basic Rate	N/A	Not Applicable
BT	Bluetooth	NIST	National Institute of Standards and Technology
BT LE	Bluetooth Low Energy	NS	No signal detect.
BW	BandWidth	NSA	Normalized Site Attenuation
Cal Int	Calibration Interval	NVLAP	National Voluntary Laboratory Accreditation Program
CCK	Complementary Code Keying	OBW	Occupied Band Width
Ch., CH	Channel	OFDM	Orthogonal Frequency Division Multiplexing
CISPR	Comite International Special des Perturbations Radioelectriques	P/M	Power meter
CW	Continuous Wave	PCB	Printed Circuit Board
DBPSK	Differential BPSK	PER	Packet Error Rate
DC	Direct Current	PHY	Physical Layer
D-factor	Distance factor	PK	Peak
DFS	Dynamic Frequency Selection	PN	Pseudo random Noise
DQPSK	Differential QPSK	PRBS	Pseudo-Random Bit Sequence
DSSS	Direct Sequence Spread Spectrum	PSD	Power Spectral Density
EDR	Enhanced Data Rate	QAM	Quadrature Amplitude Modulation
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	QP	Quasi-Peak
EMC	ElectroMagnetic Compatibility	QPSK	Quadri-Phase Shift Keying
EMI	ElectroMagnetic Interference	RBW	Resolution Band Width
EN	European Norm	RDS	Radio Data System
ERP, e.r.p.	Effective Radiated Power	RE	Radio Equipment
EU	European Union	RF	Radio Frequency
EUT	Equipment Under Test	RMS	Root Mean Square
Fac.	Factor	RSS	Radio Standards Specifications
FCC	Federal Communications Commission	Rx	Receiving
FHSS	Frequency Hopping Spread Spectrum	SA, S/A	Spectrum Analyzer
FM	Frequency Modulation	SG	Signal Generator
Freq.	Frequency	SVSWR	Site-Voltage Standing Wave Ratio
FSK	Frequency Shift Keying	TR	Test Receiver
GFSK	Gaussian Frequency-Shift Keying	Tx	Transmitting
GNSS	Global Navigation Satellite System	VBW	Video BandWidth
GPS	Global Positioning System	Vert.	Vertical
Hori.	Horizontal	WLAN	Wireless LAN

CONTENTS	PAGE
SECTION 1: Customer Information	5
SECTION 2: Equipment Under Test (EUT)	5
SECTION 3: Test specification, Procedures & Results	7
SECTION 4: Operation of EUT during testing	10
SECTION 5: Radiated Spurious Emission and Band Edge Compliance	13
APPENDIX 1: Test Data	16
Burst Rate Confirmation.....	16
Radiated Spurious Emission.....	17
APPENDIX 2: Test Instruments	52
APPENDIX 3: Photographs of Test Setup	54
Radiated Spurious Emission.....	54

SECTION 1: Customer Information

Company Name	DENSO TEN Limited
Address	2-28, Goshō-dori 1-Chome, Hyogo-ku, Kobe, 652-8510 Japan
Telephone Number	+81-78-682-2159
Contact Person	Kaoru Abe

The information provided by the customer is as follows;

- Customer, Description of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
- Operating/Test Mode(s) (Mode(s)) on all the relevant pages
- SECTION 1: Customer Information
- SECTION 2: Equipment Under Test (EUT) other than the Receipt Date and Test Date
- SECTION 4: Operation of EUT during testing

SECTION 2: Equipment Under Test (EUT)

2.1 Identification of EUT

Description	Car Navigation
Model Number	TN0022A
Serial Number	Refer to SECTION 4.2
Condition	Production prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification	No Modification by the test lab
Receipt Date	February 19, 2024
Test Date	February 22 to March 8, 2024

2.2 Product Description

General Specification

Rating	DC 12 V
Operating Temperature	-30 deg. C to +65 deg. C

Radio Specification

WLAN (IEEE802.11b/11g/11n-20)

Equipment Type	Transceiver
Frequency of Operation	2412 MHz to 2462 MHz
Type of Modulation	DSSS, OFDM
Antenna Gain	-0.84 dBi

Bluetooth (BR/EDR/Low Energy)

Equipment Type	Transceiver
Frequency of Operation	2402 MHz to 2480 MHz
Type of Modulation	BT: FHSS (GFSK, $\pi/4$ DQPSK, 8 DPSK) BT LE: GFSK
Antenna Gain	-0.35 dBi

WLAN (IEEE802.11a/11n-20/11ac-20/11n-40/11ac-40/11ac-80)

Equipment Type	Transceiver	
Frequency of Operation	20 MHz Band	5180 MHz to 5240 MHz 5745 MHz to 5825 MHz
	40 MHz Band	5190 MHz to 5230 MHz 5755 MHz to 5795 MHz
	80 MHz Band	5210 MHz 5775 MHz
Type of Modulation	OFDM	
Antenna Gain	3.49 dBi (ANT 1) / 3.43 dBi (ANT 2)	

AM (incl. HD_AM) / FM (incl. RBDS/HD_FM)

Equipment Type	Receiver
Frequency of Operation	AM, HD_AM: 530 kHz - 1710 kHz FM, RBDS/HD_FM: 87.75 MHz - 107.9 MHz SDARS: 2320 MHz - 2345 MHz
Type of Modulation	AM, HD_AM: 10 kHz FM, RBDS/HD_FM: 200 kHz
Antenna Connector Type	HFC IV
Impedance	AM, FM: 75 ohm

SECTION 3: Test specification, Procedures & Results

3.1 Test Specification

Test Specification	FCC Part 15 Subpart E The latest version on the first day of the testing period
Title	FCC 47 CFR Part 15 Radio Frequency Device Subpart E Unlicensed National Information Infrastructure Devices Section 15.407 General technical requirements

3.2 Procedures and Results

Item	Test Procedure	Specification	Worst Margin	Results	Remarks
Spurious Emission Restricted Band Edge	FCC: ANSI C63.10-2013 KDB Publication Number 789033	FCC: 15.407 (b), 15.205 and 15.209	7.5 dB 5150.000 MHz, AV, Hori.	Complied	Conducted (< 30 MHz)/ Radiated (> 30 MHz) *1)
	ISED: -	ISED: RSS-247 6.2.1.2 6.2.2.2 6.2.3.2 6.2.4.2			

Note: UL Japan, Inc.'s EMI Work Procedures: Work Instructions-ULID-003591 and Work Instructions-ULID-003593.

* In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.

*1) Radiated test was selected over 30 MHz based on FCC 15.407 (b) and KDB 789033 D02 G.3.b).

FCC Part 15.31 (e)

This EUT provides the stable voltage constantly to RF Module regardless of input voltage. Therefore, this EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT.

Therefore, the equipment complies with the antenna requirement of Section 15.203.

3.3 Addition to Standard

No addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

Measurement uncertainty is not taken into account when stating conformity with a specified requirement. Note: When margins obtained from test results are less than the measurement uncertainty, the test results may exceed the limit.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k = 2$.

Radiated Emission

Measurement distance	Frequency range		Unit	Calculated Uncertainty (+/-)
3 m	9 kHz to 30 MHz		dB	3.3
10 m			dB	3.1
3 m	30 MHz to 200 MHz	Horizontal	dB	4.8
		Vertical	dB	5.0
	200 MHz to 1000 MHz	Horizontal	dB	5.1
		Vertical	dB	6.2
10 m	30 MHz to 200 MHz	Horizontal	dB	4.8
		Vertical	dB	4.8
	200 MHz to 1000 MHz	Horizontal	dB	4.9
		Vertical	dB	5.0
3 m	1 GHz to 6 GHz	Test Receiver	dB	5.1
		Spectrum Analyzer	dB	4.9
	6 GHz to 18 GHz	Test Receiver	dB	5.4
		Spectrum Analyzer	dB	5.2
1 m	10 GHz to 18 GHz	Spectrum analyzer	dB	5.0
	18 GHz to 26.5 GHz	Spectrum analyzer	dB	5.6
	26.5 GHz to 40 GHz	Spectrum analyzer	dB	4.9
0.5 m	26.5 GHz to 40 GHz	Spectrum analyzer	dB	4.9
10 m	1 GHz to 18 GHz	Test Receiver	dB	5.4

3.5 Test Location

UL Japan, Inc. Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 Japan

Telephone: +81-596-24-8999

A2LA Certificate Number: 5107.02 / FCC Test Firm Registration Number: 884919

ISED Lab Company Number: 2973C / CAB identifier: JP0002

Test site	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.5 measurement room	6.4 x 6.4 x 3.0	6.4 x 6.4	-	-
No.6 shielded room	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	3.1 x 5.0 x 2.7	3.1 x 5.0	-	-
No.9 measurement room	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.10 shielded room	3.8 x 2.8 x 2.8	3.8 x 2.8	-	-
No.11 measurement room	4.0 x 3.4 x 2.5	N/A	-	-
No.12 measurement room	2.6 x 3.4 x 2.5	N/A	-	-
Large Chamber	16.9 x 22.1 x 10.17	16.9 x 22.1	-	10 m
Small Chamber	5.3 x 6.69 x 3.59	5.3 x 6.69	-	-

3.6 Test Data, Test Instruments, and Test Set Up

Refer to APPENDIX.

SECTION 4: Operation of EUT During Testing

4.1 Operating Mode(s)

Mode	Remarks*
IEEE 802.11a (11a)	54 Mbps, PN9
IEEE 802.11ac SISO 20 MHz BW (11ac-20)	MCS 7 (Short GI), PN9
IEEE 802.11ac SISO 40 MHz BW (11ac-40)	MCS 7 (Short GI), PN9
IEEE 802.11ac SISO 80 MHz BW (11ac-80)	MCS 7 (Short GI), PN9
<p>*Power of the EUT was set by the software as follows; Power 11a: 7.5 dBm Setting: 11ac-20: 6.5 dBm (5.5 dBm for MCS 8) 11ac-40: 5.5 dBm (3.5 dBm for MCS 8 and MCS 9) 11ac-80: 4.5 dBm (2.5 dBm for MCS 8 and MCS 9) Software: QCA RCT Ver 3.0.144.0(Date: October 9, 2017, Storage location: Driven by connected PC) *This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product. Test operating mode was determined as follows according to "Section 1 of 6 802.11 a/b/g/n testing - Managing Complex Regulatory Approvals - " of TCB Council Workshop October 2009 and also was judged the necessity of 802.11ac mode by the pre-test.</p>	


*The Details of Operation Mode(s)

Test Item	Operating Mode	Tested Antenna *2)	Tested Frequency			
			Lower Band	Middle Band	Additional Band	Upper Band
Radiated Spurious Emission (Below 1 GHz)	Tx 11a *1)	2	5180 MHz	-	-	-
Radiated Spurious Emission (Above 1 GHz)	Tx 11a	2 *4)	5180 MHz	-	-	5745 MHz
	Tx 11ac-20 *3)		5220 MHz	-	-	5785 MHz
	Tx 11ac-40 *3)	1 *5)	5240 MHz	-	-	5825 MHz
	Tx 11ac-80		5190 MHz	-	-	5755 MHz
			5230 MHz	-	-	5795 MHz
			5210 MHz	-	-	5775 MHz
<p>*1) The mode was tested as a representative, because it had the highest power at antenna terminal test. *2) The test was performed with the antenna that had higher power as a representative. *3) Since 11n-20 and 11ac-20, 11n-40 and 11ac-40, have the same modulation method and no differences in transmitting specification, test was performed on the representative mode that had the highest out power. *4) 5180 MHz to 5240 MHz, 5190 MHz to 5230 MHz, 5210 MHz *5) 5745 MHz to 5825 MHz, 5755 MHz to 5795 MHz, 5775 MHz</p>						

Simultaneous Transmission

Test Item	Mode *1)	Tested Antenna
Radiated Spurious Emission	Tx 11a 5745 MHz + Tx BT DH5 Hopping On	11a (Antenna 2) + BT (Antenna 2)
<p>*1) The test was conducted on representative mode, the worst mode at Spurious emission test for BT and the test was performed on the mode as a representative, because it had the highest power (11a mode / Antenna 2) of 5 GHz band at antenna terminal test. (*The highest power is regarding high power setting in original report.)</p>		

4.2 Configuration and Peripherals

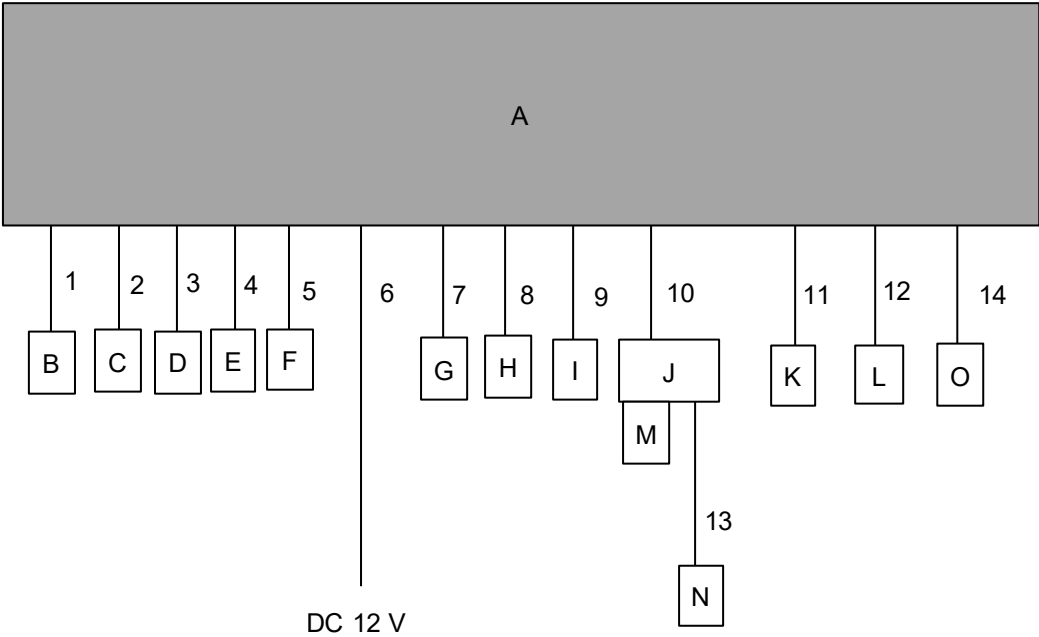

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support Equipment

No.	Item	Model number	Serial Number	Manufacturer	Remarks
A	Car Navigation	TN0022A	MX100018	DENSO TEN Limited	EUT
B	Switch	-	-	-	-
C	DCM	19MC DCM	E-033720026/004	DENSO Corporation.	-
D	Steering Switch	84250-33500	No.3	TOYOTA	-
E	Low noise Amp	ZX60-242GLN-S+	S 2036302044	Mini-Circuits	-
F	GPS Antenna	23D90064	No.3	DENSO TEN Limited	-
G	FM/AM connector (Main)	86300-30C30	PTA00490	DENSO TEN Limited	-
H	FM/AM connector (Sub)	86300-30C70	PU106543	DENSO TEN Limited	-
I	Back Camera	867B0-78080	07SD00006	KYOCERA CORPORATION	-
J	USB/AUX socket	86190-12040	No.3	Kojima Industries Corporation	-
K	Mic	86730-11010	E-033720014/022	Panasonic	-
L	Mic	86730-11010	E-033720014/024	Panasonic	-
M	USB Memory	RUF3-K16GB	P10416	Buffalo.Inc	-
N	iPod touch	A1367	CCQ50WDDCPC	Apple	-
O	Speaker Dummy	-	-	-	-

List of Cables Used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	Signal Cable	2.4	Unshielded	Unshielded	-
2	Signal Cable	2.4	Unshielded	Unshielded	-
3	Signal Cable	2.4	Unshielded	Unshielded	-
4	Signal Cable	1.0	Unshielded	Unshielded	-
5	GNSS Antenna Cable	8.0	Shielded	Shielded	-
6	DC Cable	4.4	Unshielded	Unshielded	-
7	Signal Cable	2.6	Unshielded	Unshielded	-
8	Signal Cable	2.6	Unshielded	Unshielded	-
9	Signal Cable	6.8	Unshielded	Unshielded	-
10	USB Cable	2.5	Shielded	Shielded	-
11	Signal Cable	2.7	Unshielded	Unshielded	-
12	Signal Cable	2.7	Unshielded	Unshielded	-
13	Audio Cable	1.5	Shielded	Shielded	-
14	Speaker Cable	3.2	Unshielded	Unshielded	-

SECTION 5: Radiated Spurious Emission and Band Edge Compliance

Test Procedure

< Below 1 GHz >

EUT was placed on a urethane platform of nominal size, 1.0 m by 1.5 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

< Above 1 GHz >

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane. Test antenna was aimed at the EUT for receiving the maximum signal and always kept within the illumination area of the 3 dB beamwidth of the antenna.

The height of the measuring antenna varied between 1 m and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

< Below 1 GHz >

The result also satisfied with the general limits specified in section 15.209 (a).

< Above 1 GHz >

Inside of restricted bands (Section 15.205):

Apply to limit in the Section 15.209 (a).

Outside of the restricted bands:

Apply to limit 68.2 dBuV/m, 3 m (-27 dBm e.i.r.p.*) in the Section 15.407 (b) (1) (2) (3).

For W58 Bandedge

-27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge in the section 15.407(b)(4)(i).

Restricted band edge:

Apply to limit in the Section 15.209 (a).

Since this limit is severer than the limit of the inside of restricted bands.

*Electric field strength to e.i.r.p. conversion:

$$E = \frac{1000000\sqrt{30P}}{3} \text{ (uV/m)} \quad :P \text{ is the e.i.r.p. (Watts)}$$


Test Antennas are used as below;

Frequency	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Biconical	Logperiodic	Horn

Frequency	Below 1 GHz	Above 1 GHz	
Instrument Used	Test Receiver	Spectrum Analyzer	
Detector	QP	Peak	Average
IF Bandwidth	BW: 120 kHz	RBW: 1 MHz VBW: 3 MHz	Method AD RBW: 1 MHz VBW: 3 MHz Detector: Power Averaging (RMS) Trace: ≥ 100 traces If duty cycle was less than 98%, a duty factor was added to the results.

Figure 1: Test Setup


Below 1 GHz

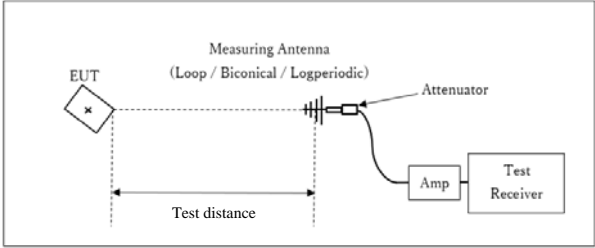

Test Distance: 3 m

x : Center of turn table

1 GHz to 6 GHz

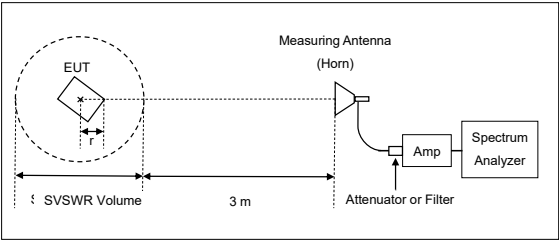


Distance Factor: $20 \times \log(3.80 \text{ m} / 3.0 \text{ m}) = 2.06 \text{ dB}$
 * Test Distance: $(3 + \text{SVSWR Volume} / 2) - r = 3.80 \text{ m}$

SVSWR Volume : 2.0 m
 (SVSWR Volume has been calibrated based on CISPR 16-1-4.)
 $r = 0.2 \text{ m}$

r : Radius of an outer periphery of EUT
 x : Center of turn table

6 GHz to 10 GHz

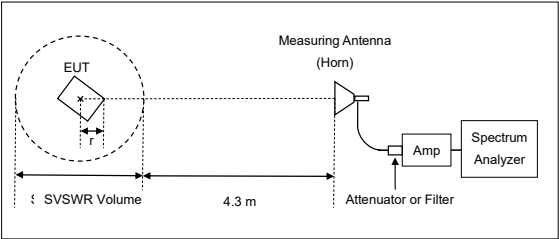


Distance Factor: $20 \times \log(4.8 \text{ m} / 3.0 \text{ m}) = 4.09 \text{ dB}$
 * Test Distance: $(4.3 + \text{SVSWR Volume} / 2) - r = 4.80 \text{ m}$

SVSWR Volume : 1.4 m
 (SVSWR Volume has been calibrated based on CISPR 16-1-4.)
 $r = 0.2 \text{ m}$

r : Radius of an outer periphery of EUT
 x : Center of turn table

10 GHz to 40 GHz

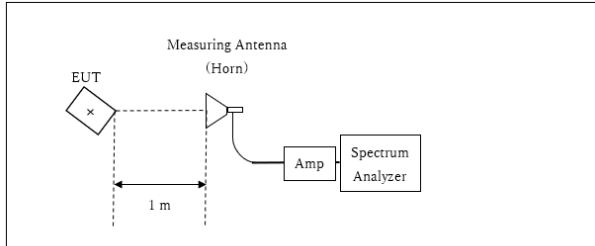

Distance Factor: $20 \times \log(1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$
 *Test Distance: 1 m

x : Center of turn table

The test was made on EUT at the normal use position.

Test results are rounded off and limit are rounded down, so some differences might be observed.


Measurement Range : 30 MHz to 40 GHz
 Test Data : APPENDIX
 Test Result : Pass

APPENDIX 1: Test Data


Burst Rate Confirmation

Test Place Ise EMC Lab.
Semi Anechoic Chamber No.4
Date February 22, 2024
Temperature / Humidity 20 deg. C / 52 % RH
Engineer Yuichiro Yamazaki
Mode Tx


11a 54 Mbps

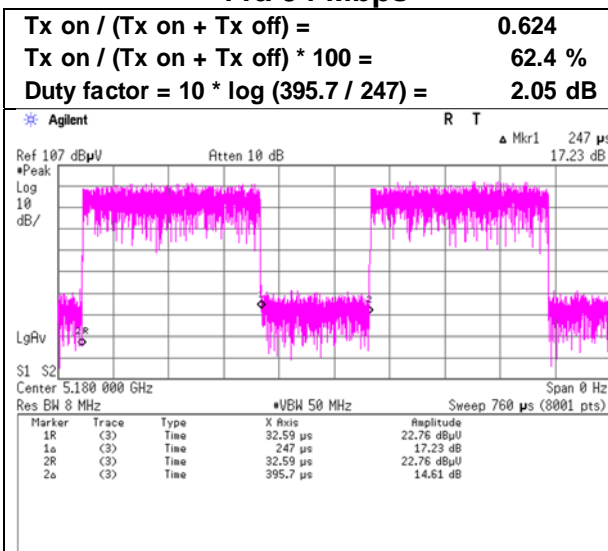


11ac-20 MCS 7 SGI

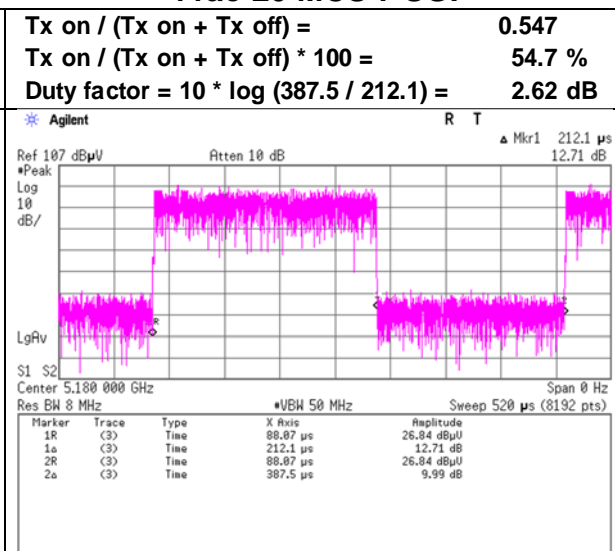

11ac-40 MCS 7 SGI

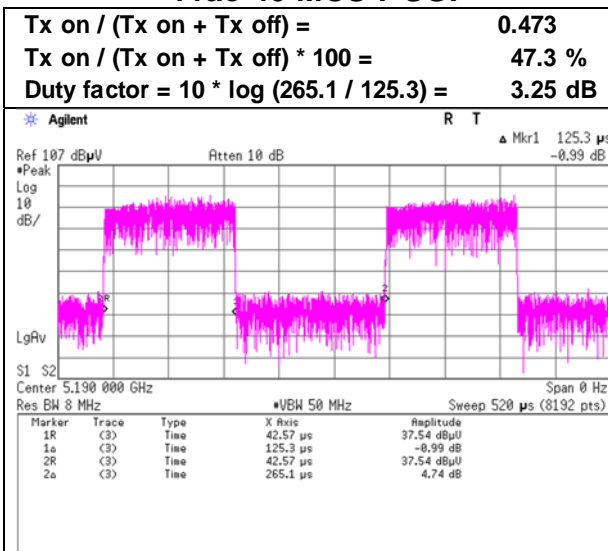

11ac-80 MCS 7 SGI

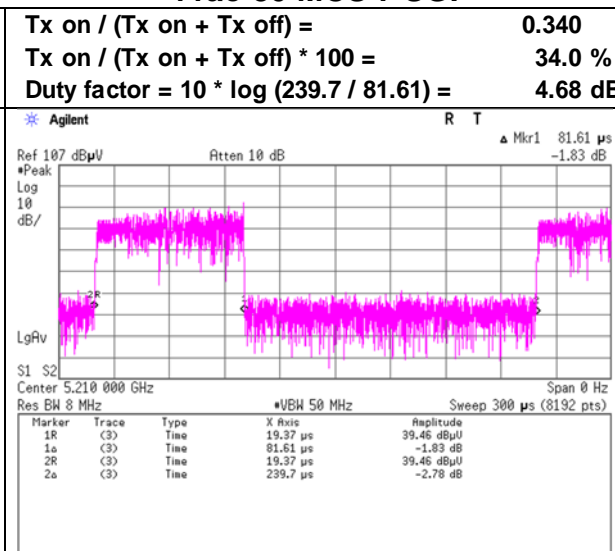

Radiated Spurious Emission

Test Place	Ise EMC Lab.			
Semi Anechoic Chamber	No.4	No.3	No.3	No.3
Date	February 22, 2024	February 25, 2024	March 5, 2024	March 5, 2024
Temperature / Humidity	20 deg. C / 52 % RH	22 deg. C / 39 %RH	20 deg. C / 40 % RH	20 deg. C / 41 % RH
Engineer	Yuichiro Yamazaki (1 GHz to 6 GHz)	Hiroyuki Furutaka (6 GHz to 10 GHz)	Takumi Nishida (10 GHz to 18 GHz)	Hiroyuki Furutaka (18 GHz to 26.5 GHz)
Semi Anechoic Chamber	No.3	No.3		
Date	March 7, 2024	March 8, 2024		
Temperature / Humidity	21 deg. C / 31 % RH	22 deg. C / 35 % RH		
Engineer	Hiroyuki Furutaka (26.5 GHz to 40 GHz)	Hiroyuki Furutaka (Below 1 GHz)		
Mode	Tx 11a 5180 MHz			

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	36.9	25.7	-	12.0	7.0	32.2	-	12.5	-	40.0	-	27.5	-	
Hori.	61.4	28.3	-	9.2	7.4	32.2	-	12.7	-	40.0	-	27.3	-	
Hori.	76.2	24.8	-	9.1	7.6	32.2	-	9.3	-	40.0	-	30.7	-	
Hori.	86.0	30.4	-	9.3	7.7	32.2	-	15.2	-	40.0	-	24.8	-	
Hori.	286.8	30.3	-	13.5	9.6	32.0	-	21.3	-	46.0	-	24.7	-	
Hori.	914.5	29.7	-	22.2	13.0	30.9	-	34.0	-	46.0	-	12.0	-	
Hori.	1580.0	47.9	40.4	25.0	3.9	33.1	-	43.7	36.2	73.9	53.9	30.2	17.7	
Hori.	2225.3	44.6	36.8	28.2	4.3	31.9	-	45.2	37.4	73.9	53.9	28.7	16.5	
Hori.	2500.0	43.6	35.1	27.7	4.5	31.7	-	44.0	35.6	68.2	53.9	24.2	18.3	
Hori.	2818.6	45.9	39.1	28.5	4.6	31.6	-	47.5	40.6	73.9	53.9	26.4	13.3	
Hori.	3159.9	48.8	-	28.9	4.8	31.4	-	51.1	-	68.2	-	17.1	-	
Hori.	5000.0	42.3	36.3	31.8	5.6	30.8	-	48.8	42.8	73.9	53.9	25.1	11.1	
Hori.	5150.0	44.8	35.8	32.1	5.6	30.9	2.1	51.7	44.7	73.9	53.9	22.2	9.2	*1)
Hori.	10000.0	47.8	-	36.5	-2.7	33.1	-	48.4	-	68.2	-	19.8	-	
Hori.	10360.0	41.1	-	36.1	-2.6	33.1	-	41.4	-	68.2	-	26.8	-	Floor noise
Hori.	15540.0	42.7	34.3	39.4	-0.7	32.2	-	49.2	40.8	73.9	53.9	24.7	13.1	Floor noise
Vert.	36.9	32.8	-	12.0	7.0	32.2	-	19.6	-	40.0	-	20.4	-	
Vert.	61.4	26.5	-	9.2	7.4	32.2	-	10.9	-	40.0	-	29.1	-	
Vert.	76.2	24.1	-	9.1	7.6	32.2	-	8.6	-	40.0	-	31.4	-	
Vert.	86.0	29.5	-	9.3	7.7	32.2	-	14.3	-	40.0	-	25.7	-	
Vert.	286.8	28.7	-	13.5	9.6	32.0	-	19.7	-	46.0	-	26.3	-	
Vert.	914.5	29.9	-	22.2	13.0	30.9	-	34.2	-	46.0	-	11.8	-	
Vert.	1580.0	50.3	44.3	25.0	3.9	33.1	-	46.1	40.1	73.9	53.9	27.8	13.8	
Vert.	2225.3	45.2	39.4	28.2	4.3	31.9	-	45.9	40.0	73.9	53.9	28.1	13.9	
Vert.	2500.0	42.2	35.7	27.7	4.5	31.7	-	42.7	36.1	68.2	53.9	25.5	17.8	
Vert.	2818.6	47.7	41.2	28.5	4.6	31.6	-	49.3	42.8	73.9	53.9	24.6	11.1	
Vert.	3159.9	51.8	-	28.9	4.8	31.4	-	54.0	-	68.2	-	14.2	-	
Vert.	5000.0	43.5	39.1	31.8	5.6	30.8	-	50.0	45.6	73.9	53.9	23.9	8.3	
Vert.	5150.0	43.3	34.6	32.1	5.6	30.9	2.1	50.2	43.6	73.9	53.9	23.7	10.3	*1)
Vert.	10000.0	46.2	-	36.5	-2.7	33.1	-	46.8	-	68.2	-	21.4	-	
Vert.	10360.0	41.2	-	36.1	-2.6	33.1	-	41.5	-	68.2	-	26.7	-	Floor noise
Vert.	15540.0	42.7	34.4	39.4	-0.7	32.2	-	49.2	40.9	73.9	53.9	24.7	13.0	Floor noise



Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)
 Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor
 *Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).
 *QP detector was used up to 1GHz.
 *1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 6 GHz 20log (3.8 m / 3.0 m) = 2.06 dB
 6 GHz - 10 GHz 20log (4.8 m / 3.0 m) = 4.09 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Test Place
Semi Anechoic Chamber
Date
Temperature / Humidity
Engineer
Mode

Ise EMC Lab.
No.4
February 22, 2024
20 deg. C / 52 % RH
Yuichiro Yamazaki
(1 GHz to 6 GHz)
Tx 11a 5180 MHz

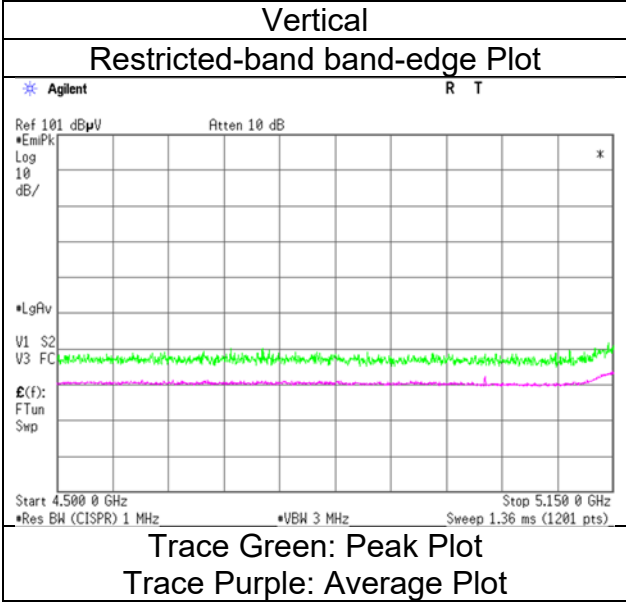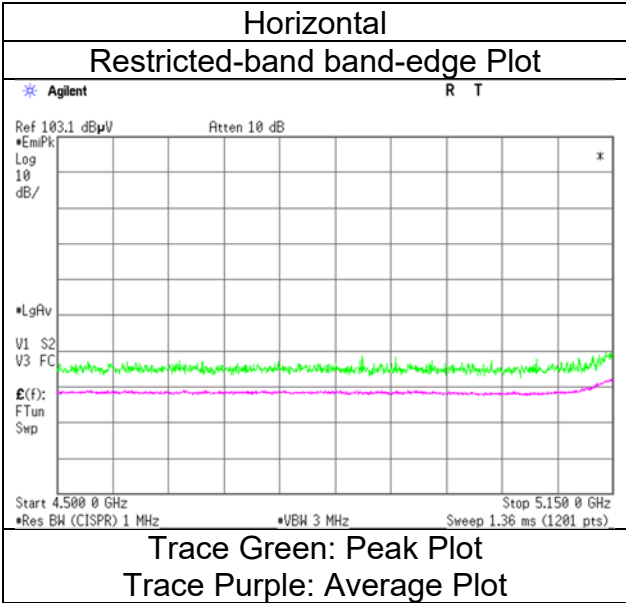

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test Place	Ise EMC Lab.			
Semi Anechoic Chamber	No.4	No.3	No.3	No.3
Date	February 22, 2024	February 25, 2024	March 5, 2024	March 5, 2024
Temperature / Humidity	20 deg. C / 52 % RH	22 deg. C / 39 % RH	20 deg. C / 40 % RH	20 deg. C / 41 % RH
Engineer	Yuichiro Yamazaki (1 GHz to 6 GHz)	Hiroyuki Furutaka (6 GHz to 10 GHz)	Takumi Nishida (10 GHz to 18 GHz)	Hiroyuki Furutaka (18 GHz to 26.5 GHz)

Semi Anechoic Chamber No.3
Date March 7, 2024
Temperature / Humidity 21 deg. C / 31 % RH
Engineer Hiroyuki Furutaka
(26.5 GHz to 40 GHz)
Mode Tx 11a 5220 MHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	1580.0	47.5	40.2	25.0	3.9	33.1	-	43.3	36.0	73.9	53.9	30.6	17.9	
Hori.	2225.3	44.3	36.5	28.2	4.3	31.9	-	44.9	37.1	73.9	53.9	29.0	16.8	
Hori.	2500.0	43.2	35.1	27.7	4.5	31.7	-	43.7	35.5	68.2	53.9	24.5	18.4	
Hori.	2818.6	45.9	39.4	28.5	4.6	31.6	-	47.5	40.9	73.9	53.9	26.4	13.0	
Hori.	3159.9	49.9	-	28.9	4.8	31.4	-	52.1	-	68.2	-	16.1	-	
Hori.	5000.0	42.5	36.6	31.8	5.6	30.8	-	49.0	43.1	73.9	53.9	24.9	10.8	
Hori.	10000.0	47.7	-	36.5	-2.7	33.1	-	48.3	-	68.2	-	19.9	-	
Hori.	10440.0	41.0	-	36.1	-2.6	33.1	-	41.3	-	68.2	-	26.9	-	Floor noise
Hori.	15660.0	42.4	34.3	39.6	-0.7	32.2	-	49.1	41.0	73.9	53.9	24.8	12.9	Floor noise
Vert.	1580.0	49.6	43.9	25.0	3.9	33.1	-	45.4	39.7	73.9	53.9	28.5	14.2	
Vert.	2225.3	45.9	39.4	28.2	4.3	31.9	-	46.5	40.0	73.9	53.9	27.4	13.9	
Vert.	2500.0	43.3	35.6	27.7	4.5	31.7	-	43.8	36.1	68.2	53.9	24.4	17.8	
Vert.	2818.6	47.3	41.4	28.5	4.6	31.6	-	48.8	42.9	73.9	53.9	25.1	11.0	
Vert.	3159.9	51.3	-	28.9	4.8	31.4	-	53.5	-	68.2	-	14.7	-	
Vert.	5000.0	43.4	38.7	31.8	5.6	30.8	-	49.9	45.2	73.9	53.9	24.0	8.7	
Vert.	10000.0	46.3	-	36.5	-2.7	33.1	-	47.0	-	68.2	-	21.3	-	
Vert.	10440.0	41.2	-	36.1	-2.6	33.1	-	41.5	-	68.2	-	26.7	-	Floor noise
Vert.	15660.0	42.7	34.7	39.6	-0.7	32.2	-	49.4	41.4	73.9	53.9	24.5	12.5	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)
 Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor
 *Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).
 *QP detector was used up to 1GHz.

Distance factor: 1 GHz - 6 GHz 20log (3.8 m / 3.0 m) = 2.06 dB
 6 GHz - 10 GHz 20log (4.8 m / 3.0 m) = 4.09 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Test Place	Ise EMC Lab.			
Semi Anechoic Chamber	No.4	No.3	No.3	No.3
Date	February 22, 2024	February 25, 2024	March 5, 2024	March 5, 2024
Temperature / Humidity	20 deg. C / 52 % RH	22 deg. C / 39 % RH	20 deg. C / 40 % RH	20 deg. C / 41 % RH
Engineer	Yuichiro Yamazaki (1 GHz to 6 GHz)	Hiroyuki Furutaka (6 GHz to 10 GHz)	Takumi Nishida (10 GHz to 18 GHz)	Hiroyuki Furutaka (18 GHz to 26.5 GHz)
Mode	Tx 11a 5240 MHz			

Polarity [Hori/Vert]	Frequency [MHz]	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
Hori.	1580.0	47.7	39.6	25.0	3.9	33.1	-	43.5	35.4	73.9	53.9	30.4	18.5	
Hori.	2225.3	44.9	35.9	28.2	4.3	31.9	-	45.5	36.5	73.9	53.9	28.4	17.4	
Hori.	2500.0	43.8	35.1	27.7	4.5	31.7	-	44.3	35.6	68.2	53.9	23.9	18.3	
Hori.	2818.6	46.9	39.5	28.5	4.6	31.6	-	48.5	41.0	73.9	53.9	25.4	12.9	
Hori.	3159.9	50.4	-	28.9	4.8	31.4	-	52.7	-	68.2	-	15.6	-	
Hori.	5000.0	42.4	36.6	31.8	5.6	30.8	-	48.9	43.1	73.9	53.9	25.0	10.8	
Hori.	5350.0	41.4	32.6	31.8	5.7	30.9	2.1	47.9	41.2	73.9	53.9	26.0	12.7	*1)
Hori.	10000.0	47.7	-	36.5	-2.7	33.1	-	48.3	-	68.2	-	19.9	-	
Hori.	10480.0	41.1	-	36.1	-2.6	33.1	-	41.5	-	68.2	-	26.7	-	Floor noise
Hori.	15720.0	42.6	34.2	39.6	-0.7	32.2	-	49.3	40.9	73.9	53.9	24.6	13.0	Floor noise
Vert.	1580.0	49.9	43.4	25.0	3.9	33.1	-	45.7	39.2	73.9	53.9	28.2	14.7	
Vert.	2225.3	46.0	39.4	28.2	4.3	31.9	-	46.6	40.0	73.9	53.9	27.3	13.9	
Vert.	2500.0	43.7	35.1	27.7	4.5	31.7	-	44.2	35.6	68.2	53.9	24.0	18.3	
Vert.	2818.6	46.9	41.8	28.5	4.6	31.6	-	48.5	43.3	73.9	53.9	25.5	10.6	
Vert.	3159.9	50.2	-	28.9	4.8	31.4	-	52.4	-	68.2	-	15.8	-	
Vert.	5000.0	43.8	38.8	31.8	5.6	30.8	-	50.3	45.3	73.9	53.9	23.6	8.6	
Vert.	5350.0	40.3	32.3	31.8	5.7	30.9	2.1	46.8	40.9	73.9	53.9	27.1	13.0	*1)
Vert.	10000.0	46.2	-	36.5	-2.7	33.1	-	46.9	-	68.2	-	21.3	-	
Vert.	10480.0	41.2	-	36.1	-2.6	33.1	-	41.6	-	68.2	-	26.6	-	Floor noise
Vert.	15720.0	42.4	34.3	39.6	-0.7	32.2	-	49.1	41.0	73.9	53.9	24.8	12.9	Floor noise



Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)
 Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor
 *Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).
 *QP detector was used up to 1GHz.
 *1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 6 GHz 20log (3.8 m / 3.0 m) = 2.06 dB
 6 GHz - 10 GHz 20log (4.8 m / 3.0 m) = 4.09 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Test Place
Semi Anechoic Chamber
Date
Temperature / Humidity
Engineer
Mode

Ise EMC Lab.
No.4
February 22, 2024
20 deg. C / 52 % RH
Yuichiro Yamazaki
(1 GHz to 6 GHz)
Tx 11a 5240 MHz

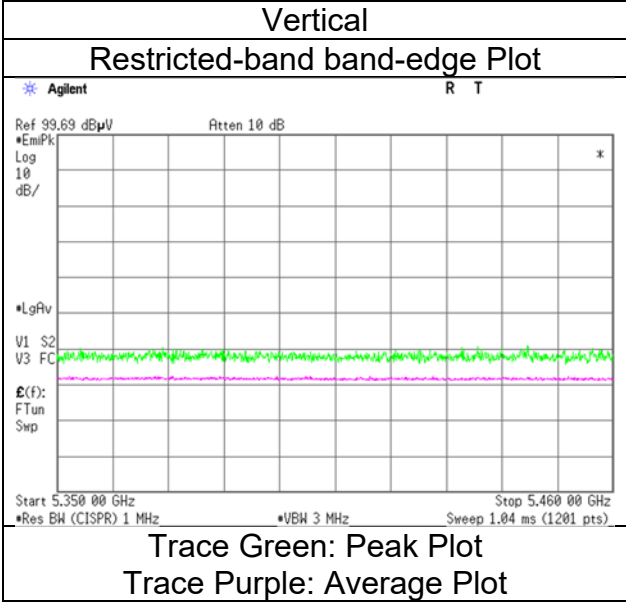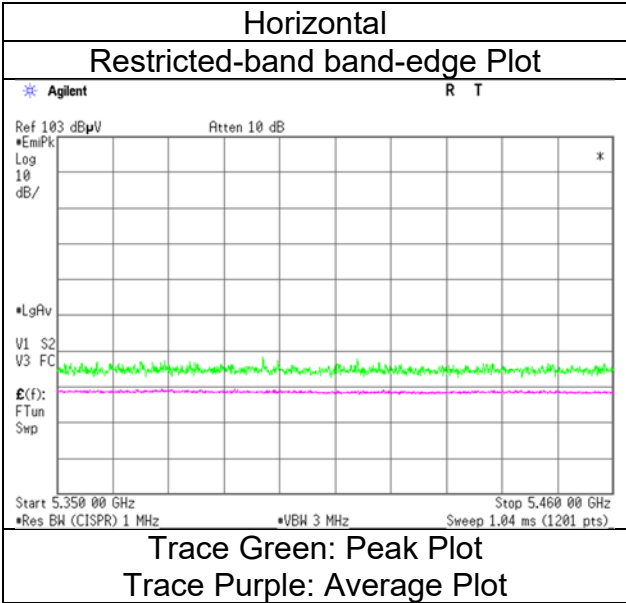

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test Place Ise EMC Lab.
Semi Anechoic Chamber No.4 No.3 No.3 No.3
Date February 22, 2024 February 25, 2024 March 5, 2024 March 5, 2024
Temperature / Humidity 20 deg. C / 52 % RH 22 deg. C / 39 % RH 20 deg. C / 40 % RH 20 deg. C / 41 % RH
Engineer Yuichiro Yamazaki (1 GHz to 6 GHz) Hiroyuki Furutaka (6 GHz to 10 GHz) Takumi Nishida (10 GHz to 18 GHz) Hiroyuki Furutaka (18 GHz to 26.5 GHz)

Semi Anechoic Chamber No.3
Date March 7, 2024
Temperature / Humidity 21 deg. C / 31 % RH
Engineer Hiroyuki Furutaka (26.5 GHz to 40 GHz)
Mode Tx 11a 5745 MHz

Polarity [Hori/Vert]	Frequency [MHz]	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
Hori.	1580.0	47.8	40.2	25.0	3.9	33.1	-	43.6	36.0	73.9	53.9	30.3	17.9	
Hori.	2225.3	44.2	36.5	28.2	4.3	31.9	-	44.8	37.1	73.9	53.9	29.1	16.8	
Hori.	2500.0	44.3	35.1	27.7	4.5	31.7	-	44.7	35.6	68.2	53.9	23.5	18.3	
Hori.	2818.6	46.3	38.5	28.5	4.6	31.6	-	47.8	40.1	73.9	53.9	26.1	13.8	
Hori.	3159.9	50.7	-	28.9	4.8	31.4	-	53.0	-	68.2	-	15.2	-	
Hori.	5000.0	42.8	36.3	31.8	5.6	30.8	-	49.3	42.8	73.9	53.9	24.6	11.1	
Hori.	5650.0	41.3	-	32.2	5.8	31.0	-	48.3	-	68.2	-	19.9	-	
Hori.	5700.0	41.5	-	32.3	5.8	31.0	-	48.6	-	105.2	-	56.6	-	
Hori.	5720.0	45.9	-	32.3	5.8	31.0	-	53.1	-	110.8	-	57.7	-	
Hori.	5725.0	48.0	-	32.4	5.8	31.0	-	55.2	-	122.2	-	67.0	-	
Hori.	10000.0	47.7	-	36.5	-2.7	33.1	-	48.3	-	68.2	-	19.9	-	
Hori.	11490.0	40.9	33.0	37.7	-2.2	33.1	-	43.3	35.4	73.9	53.9	30.6	18.5	Floor noise
Hori.	17235.0	42.9	-	39.9	-0.6	32.3	-	50.0	-	68.2	-	18.2	-	Floor noise
Vert.	1580.0	49.8	44.7	25.0	3.9	33.1	-	45.6	40.5	73.9	53.9	28.3	13.4	
Vert.	2225.3	45.2	38.7	28.2	4.3	31.9	-	45.8	39.3	73.9	53.9	28.1	14.6	
Vert.	2500.0	42.9	36.1	27.7	4.5	31.7	-	43.4	36.6	68.2	53.9	24.8	17.3	
Vert.	2818.6	47.4	41.6	28.5	4.6	31.6	-	48.9	43.1	73.9	53.9	25.0	10.8	
Vert.	3159.9	49.9	-	28.9	4.8	31.4	-	52.2	-	68.2	-	16.1	-	
Vert.	5000.0	43.2	38.2	31.8	5.6	30.8	-	49.7	44.7	73.9	53.9	24.3	9.2	
Vert.	5650.0	41.3	-	32.2	5.8	31.0	-	48.3	-	68.2	-	19.9	-	
Vert.	5700.0	41.5	-	32.3	5.8	31.0	-	48.6	-	105.2	-	56.6	-	
Vert.	5720.0	46.1	-	32.3	5.8	31.0	-	53.3	-	110.8	-	57.5	-	
Vert.	5725.0	47.7	-	32.4	5.8	31.0	-	54.9	-	122.2	-	67.3	-	
Vert.	10000.0	46.3	-	36.5	-2.7	33.1	-	47.0	-	68.2	-	21.2	-	
Vert.	11490.0	40.8	32.9	37.7	-2.2	33.1	-	43.2	35.3	73.9	53.9	30.7	18.6	Floor noise
Vert.	17235.0	43.0	-	39.9	-0.6	32.3	-	50.1	-	68.2	-	18.1	-	Floor noise



Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)
Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor
*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).
*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 6 GHz 20log (3.8 m / 3.0 m) = 2.06 dB
6 GHz - 10 GHz 20log (4.8 m / 3.0 m) = 4.09 dB
10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Test Place
Semi Anechoic Chamber
Date
Temperature / Humidity
Engineer
Mode

Ise EMC Lab.
No.4
February 22, 2024
20 deg. C / 52 % RH
Yuichiro Yamazaki
(1 GHz to 6 GHz)
Tx 11a 5745 MHz

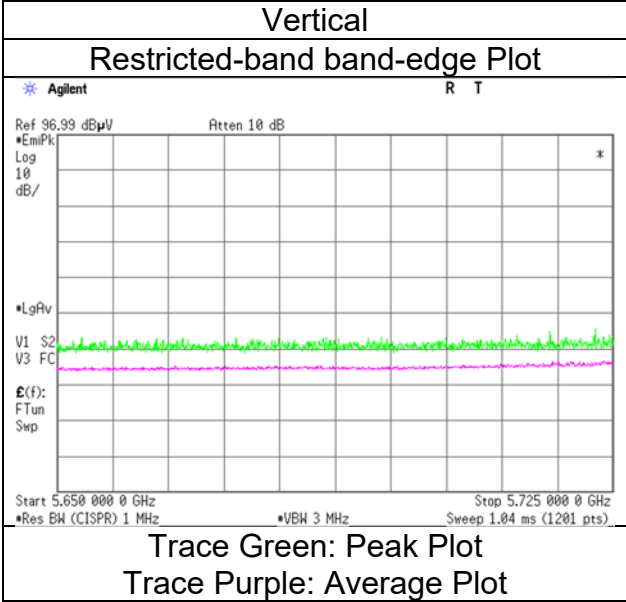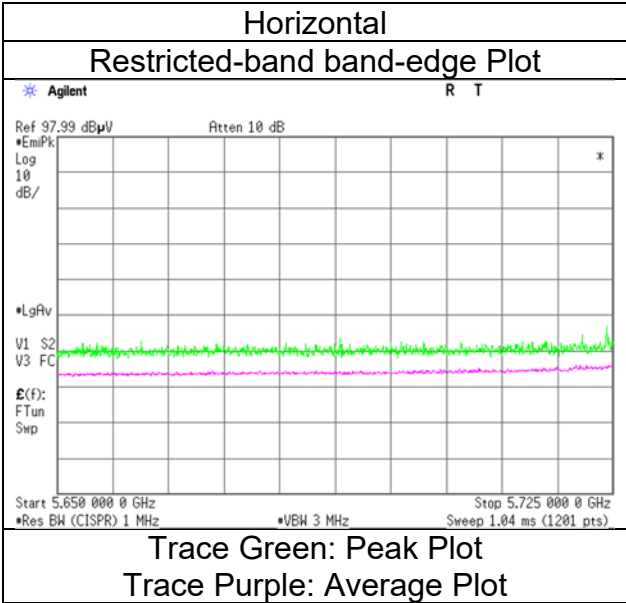

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test Place	Ise EMC Lab.			
Semi Anechoic Chamber	No.4	No.3	No.3	No.3
Date	February 22, 2024	February 25, 2024	March 5, 2024	March 5, 2024
Temperature / Humidity	20 deg. C / 52 % RH	22 deg. C / 39 % RH	20 deg. C / 40 % RH	20 deg. C / 41 % RH
Engineer	Yuichiro Yamazaki (1 GHz to 6 GHz)	Hiroyuki Furutaka (6 GHz to 10 GHz)	Takumi Nishida (10 GHz to 18 GHz)	Hiroyuki Furutaka (18 GHz to 26.5 GHz)
Semi Anechoic Chamber	No.3			
Date	March 7, 2024			
Temperature / Humidity	21 deg. C / 31 % RH			
Engineer	Hiroyuki Furutaka (26.5 GHz to 40 GHz)			
Mode	Tx 11a 5785 MHz			

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	1580.0	48.3	40.4	25.0	3.9	33.1	-	44.1	36.2	73.9	53.9	29.8	17.7	
Hori.	2225.3	43.9	36.2	28.2	4.3	31.9	-	44.5	36.8	73.9	53.9	29.4	17.1	
Hori.	2500.0	44.2	35.4	27.7	4.5	31.7	-	44.7	35.9	68.2	53.9	23.5	18.0	
Hori.	2818.6	46.4	38.5	28.5	4.6	31.6	-	47.9	40.1	73.9	53.9	26.0	13.8	
Hori.	3159.9	50.4	-	28.9	4.8	31.4	-	52.6	-	68.2	-	15.6	-	
Hori.	5000.0	42.6	36.3	31.8	5.6	30.8	-	49.1	42.8	73.9	53.9	24.8	11.1	
Hori.	10000.0	47.8	-	36.5	-2.7	33.1	-	48.4	-	68.2	-	19.8	-	
Hori.	11570.0	43.4	33.1	37.8	-2.2	33.0	-	46.0	35.6	73.9	53.9	27.9	18.3	Floor noise
Hori.	17355.0	42.6	-	40.1	-0.6	32.3	-	49.8	-	68.2	-	18.4	-	Floor noise
Vert.	1580.0	50.3	44.3	25.0	3.9	33.1	-	46.1	40.1	73.9	53.9	27.8	13.8	
Vert.	2225.3	45.2	38.2	28.2	4.3	31.9	-	45.8	38.9	73.9	53.9	28.1	15.1	
Vert.	2500.0	42.5	36.3	27.7	4.5	31.7	-	42.9	36.8	68.2	53.9	25.3	17.1	
Vert.	2818.6	47.2	40.2	28.5	4.6	31.6	-	48.8	41.8	73.9	53.9	25.2	12.1	
Vert.	3159.9	50.9	-	28.9	4.8	31.4	-	53.2	-	68.2	-	15.0	-	
Vert.	5000.0	43.4	38.6	31.8	5.6	30.8	-	49.9	45.1	73.9	53.9	24.0	8.8	
Vert.	10000.0	46.1	-	36.5	-2.7	33.1	-	46.8	-	68.2	-	21.4	-	
Vert.	11570.0	41.2	33.0	37.8	-2.2	33.0	-	43.7	35.5	73.9	53.9	30.2	18.4	Floor noise
Vert.	17355.0	42.8	-	40.1	-0.6	32.3	-	50.0	-	68.2	-	18.2	-	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor:	1 GHz - 6 GHz	20log (3.8 m / 3.0 m) = 2.06 dB
	6 GHz - 10 GHz	20log (4.8 m / 3.0 m) = 4.09 dB
	10 GHz - 40 GHz	20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Test Place	Ise EMC Lab.			
Semi Anechoic Chamber	No.4	No.3	No.3	No.3
Date	February 22, 2024	February 25, 2024	March 5, 2024	March 5, 2024
Temperature / Humidity	20 deg. C / 52 % RH	22 deg. C / 39 % RH	20 deg. C / 40 % RH	20 deg. C / 41 % RH
Engineer	Yuichiro Yamazaki (1 GHz to 6 GHz)	Hiroyuki Furutaka (6 GHz to 10 GHz)	Takumi Nishida (10 GHz to 18 GHz)	Hiroyuki Furutaka (18 GHz to 26.5 GHz)

Semi Anechoic Chamber No.3
 Date March 7, 2024
 Temperature / Humidity 21 deg. C / 31 % RH
 Engineer Hiroyuki Furutaka
 (26.5 GHz to 40 GHz)
 Mode Tx 11a 5825 MHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	1580.0	48.4	40.8	25.0	3.9	33.1	-	44.2	36.6	73.9	53.9	29.7	17.3	
Hori.	2225.3	44.0	36.5	28.2	4.3	31.9	-	44.6	37.1	73.9	53.9	29.3	16.8	
Hori.	2500.0	43.9	35.2	27.7	4.5	31.7	-	44.4	35.6	68.2	53.9	23.8	18.3	
Hori.	2818.6	46.7	38.1	28.5	4.6	31.6	-	48.3	39.6	73.9	53.9	25.7	14.3	
Hori.	3159.9	49.9	-	28.9	4.8	31.4	-	52.1	-	68.2	-	16.1	-	
Hori.	5000.0	42.6	36.7	31.8	5.6	30.8	-	49.1	43.2	73.9	53.9	24.8	10.7	
Hori.	5850.0	43.8	-	32.7	5.9	31.1	-	51.2	-	122.2	-	71.0	-	
Hori.	5855.0	43.3	-	32.7	5.9	31.1	-	50.8	-	110.8	-	60.0	-	
Hori.	5875.0	41.3	-	32.7	5.9	31.1	-	48.9	-	105.2	-	56.3	-	
Hori.	5925.0	41.2	-	32.8	5.9	31.1	-	48.8	-	68.2	-	19.4	-	
Hori.	10000.0	47.8	-	36.5	-2.7	33.1	-	48.4	-	68.2	-	19.8	-	
Hori.	11650.0	41.3	33.3	37.8	-2.1	33.0	-	44.0	36.0	73.9	53.9	30.0	18.0	Floor noise
Hori.	17475.0	42.5	-	40.2	-0.6	32.3	-	49.9	-	68.2	-	18.3	-	Floor noise
Vert.	1580.0	50.8	44.2	25.0	3.9	33.1	-	46.6	40.0	73.9	53.9	27.3	13.9	
Vert.	2225.3	45.7	38.2	28.2	4.3	31.9	-	46.3	38.8	73.9	53.9	27.6	15.1	
Vert.	2500.0	43.1	36.0	27.7	4.5	31.7	-	43.6	36.5	68.2	53.9	24.6	17.4	
Vert.	2818.6	47.4	39.9	28.5	4.6	31.6	-	49.0	41.5	73.9	53.9	24.9	12.5	
Vert.	3159.9	50.5	-	28.9	4.8	31.4	-	52.7	-	68.2	-	15.5	-	
Vert.	5000.0	43.3	38.7	31.8	5.6	30.8	-	49.8	45.2	73.9	53.9	24.1	8.7	
Vert.	5850.0	43.2	-	32.7	5.9	31.1	-	50.7	-	122.2	-	71.6	-	
Vert.	5855.0	42.8	-	32.7	5.9	31.1	-	50.2	-	110.8	-	60.6	-	
Vert.	5875.0	41.5	-	32.7	5.9	31.1	-	49.1	-	105.2	-	56.1	-	
Vert.	5925.0	41.1	-	32.8	5.9	31.1	-	48.7	-	68.2	-	19.5	-	
Vert.	10000.0	46.7	-	36.5	-2.7	33.1	-	47.3	-	68.2	-	20.9	-	
Vert.	11650.0	41.2	33.2	37.8	-2.1	33.0	-	43.9	35.9	73.9	53.9	30.1	18.1	Floor noise
Vert.	17475.0	42.7	-	40.2	-0.6	32.3	-	50.1	-	68.2	-	18.1	-	Floor noise



Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)
 Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor
 *Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).
 *QP detector was used up to 1GHz.

Distance factor: 1 GHz - 6 GHz 20log (3.8 m / 3.0 m) = 2.06 dB
 6 GHz - 10 GHz 20log (4.8 m / 3.0 m) = 4.09 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Test Place
 Semi Anechoic Chamber
 Date
 Temperature / Humidity
 Engineer
 Mode

Ise EMC Lab.
 No.4
 February 22, 2024
 20 deg. C / 52 % RH
 Yuichiro Yamazaki
 (1 GHz to 6 GHz)
 Tx 11a 5825 MHz

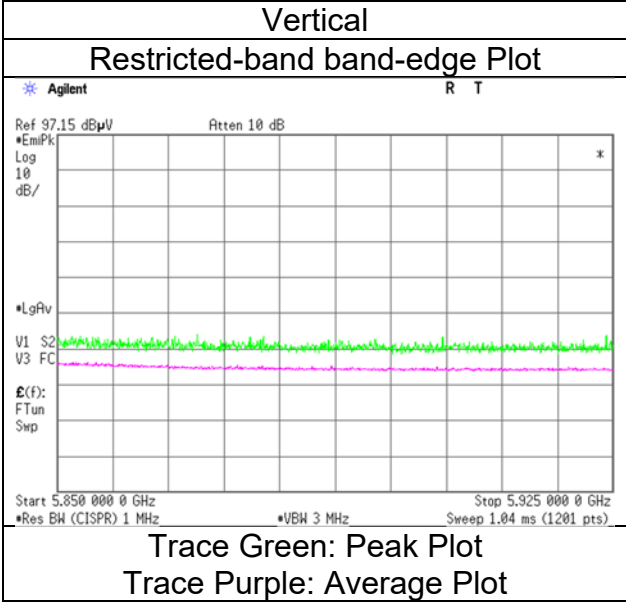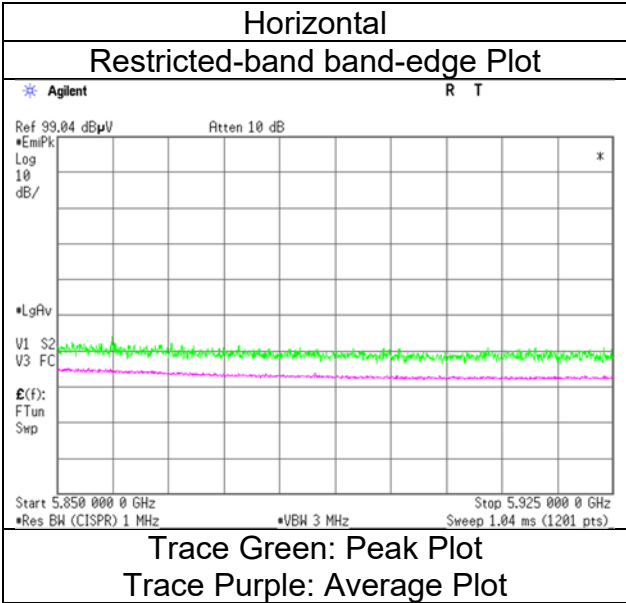

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
 Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test Place	Ise EMC Lab.			
Semi Anechoic Chamber	No.4	No.3	No.3	No.3
Date	February 22, 2024	February 25, 2024	March 5, 2024	March 5, 2024
Temperature / Humidity	20 deg. C / 52 % RH	22 deg. C / 39 % RH	20 deg. C / 40 % RH	20 deg. C / 41 % RH
Engineer	Yuichiro Yamazaki (1 GHz to 6 GHz)	Hiroyuki Furutaka (6 GHz to 10 GHz)	Takumi Nishida (10 GHz to 18 GHz)	Hiroyuki Furutaka (18 GHz to 26.5 GHz)
Semi Anechoic Chamber	No.3			
Date	March 7, 2024			
Temperature / Humidity	21 deg. C / 31 % RH			
Engineer	Hiroyuki Furutaka (26.5 GHz to 40 GHz)			
Mode	Tx 11ac-20 5180 MHz			

Polarity [Hori/Vert]	Frequency [MHz]	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
Hori.	1580.0	46.9	39.1	25.0	3.9	33.1	-	42.7	34.9	73.9	53.9	31.3	19.0	
Hori.	2225.3	44.5	35.7	28.2	4.3	31.9	-	45.2	36.3	73.9	53.9	28.8	17.6	
Hori.	2500.0	43.5	35.3	27.7	4.5	31.7	-	44.0	35.8	68.2	53.9	24.2	18.1	
Hori.	2818.6	47.3	39.2	28.5	4.6	31.6	-	48.9	40.8	73.9	53.9	25.1	13.2	
Hori.	3159.9	50.5	-	28.9	4.8	31.4	-	52.8	-	68.2	-	15.4	-	
Hori.	5000.0	42.2	36.6	31.8	5.6	30.8	-	48.7	43.1	73.9	53.9	25.3	10.8	
Hori.	5150.0	44.4	34.0	32.1	5.6	30.9	2.6	51.3	43.5	73.9	53.9	22.6	10.4	*1)
Hori.	10000.0	47.9	-	36.5	-2.7	33.1	-	48.5	-	68.2	-	19.7	-	
Hori.	10360.0	41.2	-	36.1	-2.6	33.1	-	41.5	-	68.2	-	26.7	-	Floor noise
Hori.	15540.0	42.6	34.4	39.4	-0.7	32.2	-	49.1	40.9	73.9	53.9	24.8	13.0	Floor noise
Vert.	1580.0	49.9	43.4	25.0	3.9	33.1	-	45.7	39.2	73.9	53.9	28.2	14.7	
Vert.	2225.3	46.0	39.1	28.2	4.3	31.9	-	46.6	39.7	73.9	53.9	27.3	14.2	
Vert.	2500.0	43.7	35.5	27.7	4.5	31.7	-	44.2	36.0	68.2	53.9	24.0	17.9	
Vert.	2818.6	47.0	41.3	28.5	4.6	31.6	-	48.6	42.9	73.9	53.9	25.4	11.0	
Vert.	3159.9	51.1	-	28.9	4.8	31.4	-	53.4	-	68.2	-	14.9	-	
Vert.	5000.0	43.6	38.6	31.8	5.6	30.8	-	50.1	45.1	73.9	53.9	23.8	8.8	
Vert.	5150.0	43.3	34.7	32.1	5.6	30.9	2.6	50.2	44.2	73.9	53.9	23.7	9.7	*1)
Vert.	10000.0	46.3	-	36.5	-2.7	33.1	-	46.9	-	68.2	-	21.3	-	
Vert.	10360.0	41.3	-	36.1	-2.6	33.1	-	41.6	-	68.2	-	26.6	-	Floor noise
Vert.	15540.0	42.6	34.6	39.4	-0.7	32.2	-	49.1	41.1	73.9	53.9	24.8	12.8	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.



*1) Not Out of Band emission(Leakage Power)

Distance factor:	1 GHz - 6 GHz	20log (3.8 m / 3.0 m) = 2.06 dB
	6 GHz - 10 GHz	20log (4.8 m / 3.0 m) = 4.09 dB
	10 GHz - 40 GHz	20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Test Place
Semi Anechoic Chamber
Date
Temperature / Humidity
Engineer
Mode

Ise EMC Lab.
No.4
February 22, 2024
20 deg. C / 52 % RH
Yuichiro Yamazaki
(1 GHz to 6 GHz)
Tx 11ac-20 5180 MHz

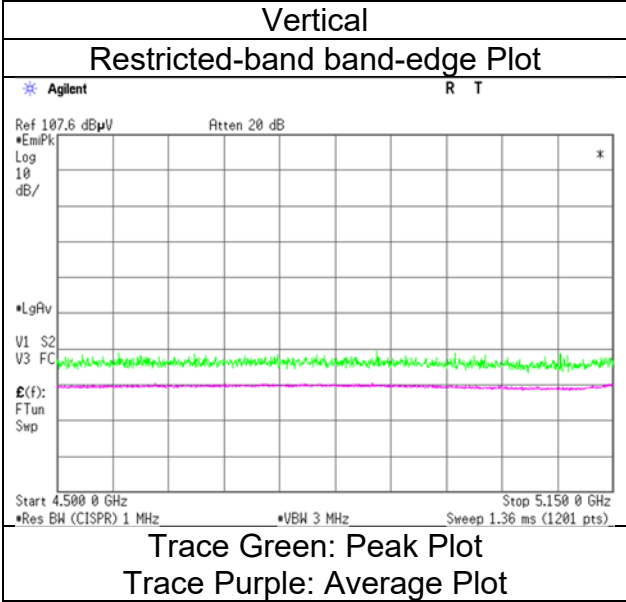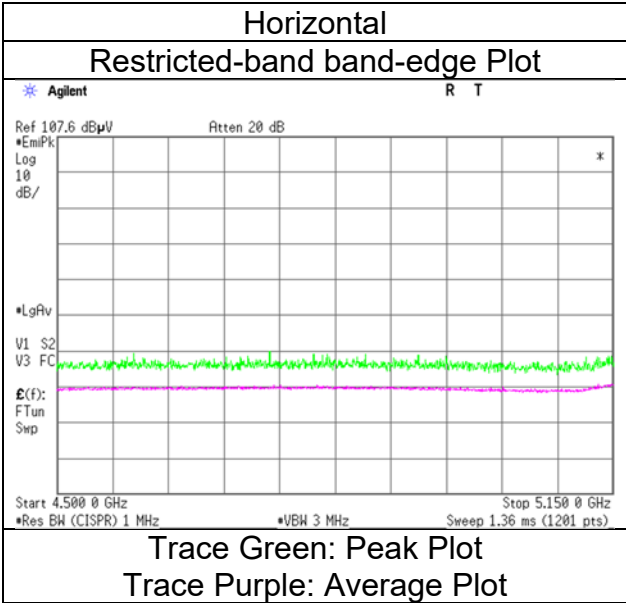

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test Place	Ise EMC Lab.			
Semi Anechoic Chamber	No.4	No.3	No.3	No.3
Date	February 22, 2024	February 25, 2024	March 5, 2024	March 5, 2024
Temperature / Humidity	20 deg. C / 52 % RH	22 deg. C / 39 % RH	20 deg. C / 40 % RH	20 deg. C / 41 % RH
Engineer	Yuichiro Yamazaki (1 GHz to 6 GHz)	Hiroyuki Furutaka (6 GHz to 10 GHz)	Takumi Nishida (10 GHz to 18 GHz)	Hiroyuki Furutaka (18 GHz to 26.5 GHz)

Semi Anechoic Chamber No.3
 Date March 7, 2024
 Temperature / Humidity 21 deg. C / 31 % RH
 Engineer Hiroyuki Furutaka
 (26.5 GHz to 40 GHz)
 Mode Tx 11ac-20 5220 MHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	1580.0	46.8	40.1	25.0	3.9	33.1	-	42.6	35.9	73.9	53.9	31.3	18.0	
Hori.	2225.3	43.8	35.2	28.2	4.3	31.9	-	44.5	35.8	73.9	53.9	29.5	18.1	
Hori.	2500.0	44.0	35.7	27.7	4.5	31.7	-	44.5	36.1	68.2	53.9	23.7	17.8	
Hori.	2818.6	48.2	39.4	28.5	4.6	31.6	-	49.7	41.0	73.9	53.9	24.2	12.9	
Hori.	3159.9	51.2	-	28.9	4.8	31.4	-	53.5	-	68.2	-	14.7	-	
Hori.	5000.0	42.2	36.2	31.8	5.6	30.8	-	48.7	42.7	73.9	53.9	25.2	11.2	
Hori.	10000.0	47.5	-	36.5	-2.7	33.1	-	48.1	-	68.2	-	20.1	-	
Hori.	10440.0	41.1	-	36.1	-2.6	33.1	-	41.4	-	68.2	-	26.8	-	Floor noise
Hori.	15660.0	42.6	34.4	39.6	-0.7	32.2	-	49.3	41.1	73.9	53.9	24.6	12.8	Floor noise
Vert.	1580.0	49.5	43.3	25.0	3.9	33.1	-	45.3	39.1	73.9	53.9	28.6	14.8	
Vert.	2225.3	46.2	39.5	28.2	4.3	31.9	-	46.8	40.1	73.9	53.9	27.1	13.8	
Vert.	2500.0	43.8	35.5	27.7	4.5	31.7	-	44.3	36.0	68.2	53.9	23.9	17.9	
Vert.	2818.6	46.9	41.6	28.5	4.6	31.6	-	48.4	43.1	73.9	53.9	25.5	10.8	
Vert.	3159.9	51.6	-	28.9	4.8	31.4	-	53.8	-	68.2	-	14.4	-	
Vert.	5000.0	43.9	38.5	31.8	5.6	30.8	-	50.4	45.0	73.9	53.9	23.5	8.9	
Vert.	10000.0	46.3	-	36.5	-2.7	33.1	-	46.9	-	68.2	-	21.3	-	
Vert.	10440.0	41.7	-	36.1	-2.6	33.1	-	42.0	-	68.2	-	26.2	-	Floor noise
Vert.	15660.0	42.4	34.6	39.6	-0.7	32.2	-	49.1	41.3	73.9	53.9	24.8	12.6	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor:	1 GHz - 6 GHz	20log (3.8 m / 3.0 m) = 2.06 dB
	6 GHz - 10 GHz	20log (4.8 m / 3.0 m) = 4.09 dB
	10 GHz - 40 GHz	20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Test Place	Ise EMC Lab.			
Semi Anechoic Chamber	No.4	No.3	No.3	No.3
Date	February 22, 2024	February 25, 2024	March 5, 2024	March 5, 2024
Temperature / Humidity	20 deg. C / 52 % RH	22 deg. C / 39 % RH	20 deg. C / 40 % RH	20 deg. C / 41 % RH
Engineer	Yuichiro Yamazaki (1 GHz to 6 GHz)	Hiroyuki Furutaka (6 GHz to 10 GHz)	Takumi Nishida (10 GHz to 18 GHz)	Hiroyuki Furutaka (18 GHz to 26.5 GHz)
Semi Anechoic Chamber	No.3			
Date	March 7, 2024			
Temperature / Humidity	21 deg. C / 31 % RH			
Engineer	Hiroyuki Furutaka (26.5 GHz to 40 GHz)			
Mode	Tx 11ac-20 5240 MHz			

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	1580.0	47.7	39.8	25.0	3.9	33.1	-	43.5	35.6	73.9	53.9	30.4	18.3	
Hori.	2225.3	44.6	35.6	28.2	4.3	31.9	-	45.3	36.2	73.9	53.9	28.7	17.7	
Hori.	2500.0	43.7	35.0	27.7	4.5	31.7	-	44.2	35.4	68.2	53.9	24.0	18.5	
Hori.	2818.6	47.3	39.8	28.5	4.6	31.6	-	48.9	41.3	73.9	53.9	25.0	12.6	
Hori.	3159.9	51.4	-	28.9	4.8	31.4	-	53.6	-	68.2	-	14.6	-	
Hori.	5000.0	42.5	36.5	31.8	5.6	30.8	-	49.0	43.0	73.9	53.9	24.9	11.0	
Hori.	5350.0	41.0	32.5	31.8	5.7	30.9	2.6	47.5	41.7	73.9	53.9	26.4	12.2	*1)
Hori.	10000.0	47.8	-	36.5	-2.7	33.1	-	48.5	-	68.2	-	19.7	-	
Hori.	10480.0	41.3	-	36.1	-2.6	33.1	-	41.7	-	68.2	-	26.5	-	Floor noise
Hori.	15720.0	44.0	34.5	39.6	-0.7	32.2	-	50.7	41.2	73.9	53.9	23.2	12.7	Floor noise
Vert.	1580.0	49.7	43.4	25.0	3.9	33.1	-	45.5	39.2	73.9	53.9	28.4	14.7	
Vert.	2225.3	46.2	39.0	28.2	4.3	31.9	-	46.8	39.6	73.9	53.9	27.1	14.3	
Vert.	2500.0	43.5	35.0	27.7	4.5	31.7	-	44.0	35.5	68.2	53.9	24.2	18.4	
Vert.	2818.6	46.5	41.8	28.5	4.6	31.6	-	48.1	43.3	73.9	53.9	25.9	10.6	
Vert.	3159.9	49.9	-	28.9	4.8	31.4	-	52.2	-	68.2	-	16.0	-	
Vert.	5000.0	43.1	38.7	31.8	5.6	30.8	-	49.6	45.2	73.9	53.9	24.3	8.7	
Vert.	5350.0	40.2	32.5	31.8	5.7	30.9	2.6	46.8	41.6	73.9	53.9	27.1	12.3	*1)
Vert.	10000.0	46.4	-	36.5	-2.7	33.1	-	47.0	-	68.2	-	21.2	-	
Vert.	10480.0	41.1	-	36.1	-2.6	33.1	-	41.5	-	68.2	-	26.7	-	Floor noise
Vert.	15720.0	42.3	34.5	39.6	-0.7	32.2	-	49.1	41.3	73.9	53.9	24.8	12.7	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.



*1) Not Out of Band emission(Leakage Power)

Distance factor:	1 GHz - 6 GHz	20log (3.8 m / 3.0 m) = 2.06 dB
	6 GHz - 10 GHz	20log (4.8 m / 3.0 m) = 4.09 dB
	10 GHz - 40 GHz	20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Test Place
Semi Anechoic Chamber
Date
Temperature / Humidity
Engineer
Mode

Ise EMC Lab.
No.4
February 22, 2024
20 deg. C / 52 % RH
Yuichiro Yamazaki
(1 GHz to 6 GHz)
Tx 11ac-20 5240 MHz

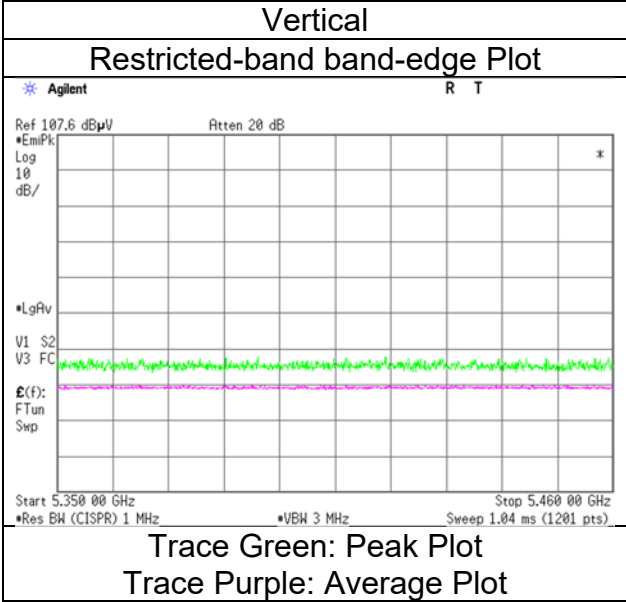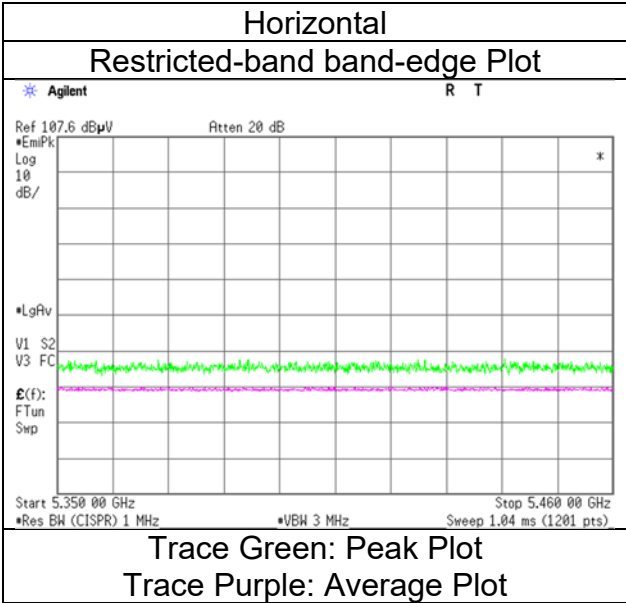

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test Place	Ise EMC Lab.			
Semi Anechoic Chamber	No.4	No.3	No.3	No.3
Date	February 25, 2024	February 25, 2024	March 5, 2024	March 5, 2024
Temperature / Humidity	18 deg. C / 45 % RH	22 deg. C / 39 % RH	20 deg. C / 40 % RH	20 deg. C / 41 % RH
Engineer	Shousei Hamaguchi (1 GHz to 6 GHz)	Hiroyuki Furutaka (6 GHz to 10 GHz)	Takumi Nishida (10 GHz to 18 GHz)	Hiroyuki Furutaka (18 GHz to 26.5 GHz)

Semi Anechoic Chamber No.3
 Date March 7, 2024
 Temperature / Humidity 21 deg. C / 31 % RH
 Engineer Hiroyuki Furutaka
 (26.5 GHz to 40 GHz)
 Mode Tx 11ac-20 5745 MHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	1580.0	45.3	39.2	25.0	3.9	33.1	-	41.1	35.0	73.9	53.9	32.8	18.9	
Hori.	2225.3	44.9	39.1	28.2	4.3	31.9	-	45.5	39.7	73.9	53.9	28.4	14.2	
Hori.	2500.0	43.3	35.5	27.7	4.5	31.7	-	43.7	36.0	68.2	53.9	24.5	17.9	
Hori.	2818.6	43.0	36.0	28.5	4.6	31.6	-	44.6	37.5	73.9	53.9	29.3	16.4	
Hori.	3159.9	46.0	-	28.9	4.8	31.4	-	48.3	-	68.2	-	19.9	-	
Hori.	5000.0	43.0	38.2	31.8	5.6	30.8	-	49.5	44.7	73.9	53.9	24.4	9.2	
Hori.	5650.0	40.3	-	32.2	5.8	31.0	-	47.2	-	68.2	-	21.0	-	
Hori.	5700.0	41.1	-	32.3	5.8	31.0	-	48.2	-	105.2	-	57.0	-	
Hori.	5720.0	41.5	-	32.3	5.8	31.0	-	48.6	-	110.8	-	62.2	-	
Hori.	5725.0	42.6	-	32.4	5.8	31.0	-	49.8	-	122.2	-	72.4	-	
Hori.	10000.0	47.7	-	36.5	-2.7	33.1	-	48.3	-	68.2	-	19.9	-	
Hori.	11570.0	41.4	33.3	37.8	-2.2	33.0	-	43.9	35.8	73.9	53.9	30.0	18.1	Floor noise
Hori.	17355.0	42.7	-	40.1	-0.6	32.3	-	49.9	-	68.2	-	18.3	-	Floor noise
Vert.	1580.0	47.9	43.3	25.0	3.9	33.1	-	43.7	39.1	73.9	53.9	30.2	14.8	
Vert.	2225.3	44.8	38.6	28.2	4.3	31.9	-	45.4	39.2	73.9	53.9	28.5	14.7	
Vert.	2500.0	42.4	36.0	27.7	4.5	31.7	-	42.9	36.5	68.2	53.9	25.3	17.4	
Vert.	2818.6	47.2	40.9	28.5	4.6	31.6	-	48.7	42.4	73.9	53.9	25.2	11.5	
Vert.	3159.9	45.2	-	28.9	4.8	31.4	-	47.4	-	68.2	-	20.8	-	
Vert.	5000.0	42.3	37.2	31.8	5.6	30.8	-	48.8	43.7	73.9	53.9	25.1	10.2	
Vert.	5650.0	40.5	-	32.2	5.8	31.0	-	47.5	-	68.2	-	20.7	-	
Vert.	5700.0	41.0	-	32.3	5.8	31.0	-	48.1	-	105.2	-	57.1	-	
Vert.	5720.0	41.5	-	32.3	5.8	31.0	-	48.7	-	110.8	-	62.1	-	
Vert.	5725.0	42.3	-	32.4	5.8	31.0	-	49.5	-	122.2	-	72.7	-	
Vert.	10000.0	46.5	-	36.5	-2.7	33.1	-	47.2	-	68.2	-	21.0	-	
Vert.	11570.0	41.3	33.2	37.8	-2.2	33.0	-	43.8	35.7	73.9	53.9	30.1	18.2	Floor noise
Vert.	17355.0	42.6	-	40.1	-0.6	32.3	-	49.8	-	68.2	-	18.4	-	Floor noise



Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)
 Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor
 *Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).
 *QP detector was used up to 1GHz.

Distance factor: 1 GHz - 6 GHz 20log (3.8 m / 3.0 m) = 2.06 dB
 6 GHz - 10 GHz 20log (4.8 m / 3.0 m) = 4.09 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Test Place
Semi Anechoic Chamber
Date
Temperature / Humidity
Engineer
Mode

Ise EMC Lab.
No.4
February 25, 2024
18 deg. C / 45 % RH
Shousei Hamaguchi
(1 GHz to 6 GHz)
Tx 11ac-20 5745 MHz

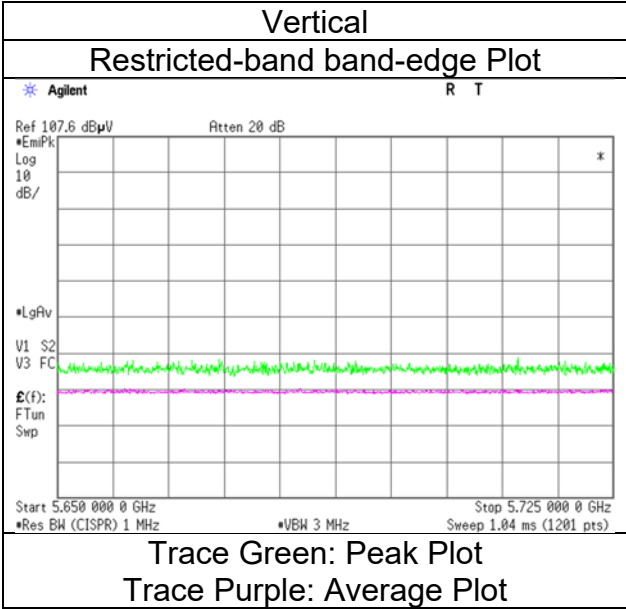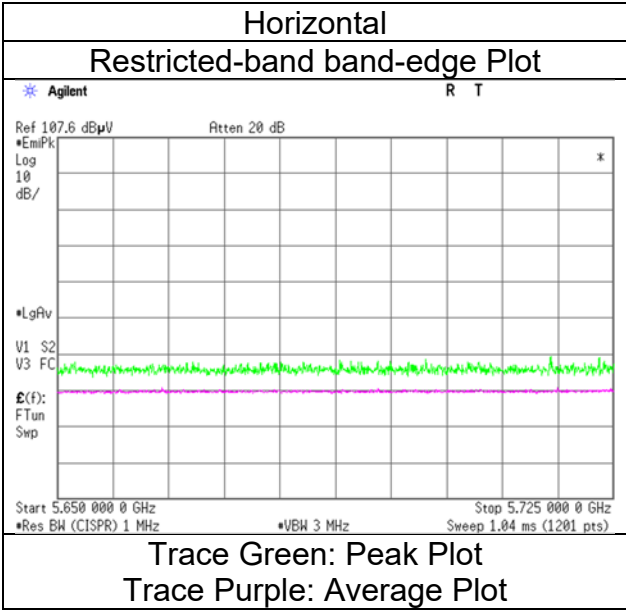

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test Place	Ise EMC Lab.			
Semi Anechoic Chamber	No.4	No.3	No.3	No.3
Date	February 25, 2024	February 25, 2024	March 5, 2024	March 5, 2024
Temperature / Humidity	18 deg. C / 45 % RH	22 deg. C / 39 % RH	20 deg. C / 40 % RH	20 deg. C / 41 % RH
Engineer	Shousei Hamaguchi (1 GHz to 6 GHz)	Hiroyuki Furutaka (6 GHz to 10 GHz)	Takumi Nishida (10 GHz to 18 GHz)	Hiroyuki Furutaka (18 GHz to 26.5 GHz)

Semi Anechoic Chamber No.3
 Date March 7, 2024
 Temperature / Humidity 21 deg. C / 31 % RH
 Engineer Hiroyuki Furutaka
 (26.5 GHz to 40 GHz)
 Mode Tx 11ac-20 5785 MHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	1580.0	45.3	39.2	25.0	3.9	33.1	-	41.1	35.0	73.9	53.9	32.8	18.9	
Hori.	2225.3	44.9	39.1	28.2	4.3	31.9	-	45.5	39.7	73.9	53.9	28.4	14.2	
Hori.	2500.0	43.3	35.5	27.7	4.5	31.7	-	43.7	36.0	68.2	53.9	24.5	17.9	
Hori.	2818.6	43.0	36.0	28.5	4.6	31.6	-	44.6	37.5	73.9	53.9	29.3	16.4	
Hori.	3159.9	46.0	-	28.9	4.8	31.4	-	48.3	-	68.2	-	19.9	-	
Hori.	5000.0	43.0	38.2	31.8	5.6	30.8	-	49.5	44.7	73.9	53.9	24.4	9.2	
Hori.	10000.0	47.8	-	36.5	-2.7	33.1	-	48.4	-	68.2	-	19.8	-	
Hori.	11570.0	41.0	33.1	37.8	-2.2	33.0	-	43.5	35.6	73.9	53.9	30.4	18.3	Floor noise
Hori.	17355.0	42.8	-	40.1	-0.6	32.3	-	50.0	-	68.2	-	18.2	-	Floor noise
Vert.	1580.0	47.9	43.3	25.0	3.9	33.1	-	43.7	39.1	73.9	53.9	30.2	14.8	
Vert.	2225.3	44.8	38.6	28.2	4.3	31.9	-	45.4	39.2	73.9	53.9	28.5	14.7	
Vert.	2500.0	42.4	36.0	27.7	4.5	31.7	-	42.9	36.5	68.2	53.9	25.3	17.4	
Vert.	2818.6	47.2	40.9	28.5	4.6	31.6	-	48.7	42.4	73.9	53.9	25.2	11.5	
Vert.	3159.9	45.2	-	28.9	4.8	31.4	-	47.4	-	68.2	-	20.8	-	
Vert.	5000.0	42.3	37.2	31.8	5.6	30.8	-	48.8	43.7	73.9	53.9	25.1	10.2	
Vert.	10000.0	46.5	-	36.5	-2.7	33.1	-	47.2	-	68.2	-	21.0	-	
Vert.	11570.0	41.2	33.1	37.8	-2.2	33.0	-	43.7	35.6	73.9	53.9	30.2	18.3	Floor noise
Vert.	17355.0	42.7	-	40.1	-0.6	32.3	-	49.9	-	68.2	-	18.3	-	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor:	1 GHz - 6 GHz	20log (3.8 m / 3.0 m) = 2.06 dB
	6 GHz - 10 GHz	20log (4.8 m / 3.0 m) = 4.09 dB
	10 GHz - 40 GHz	20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Test Place Ise EMC Lab.
Semi Anechoic Chamber No.4 No.3 No.3 No.3
Date February 25, 2024 February 25, 2024 March 5, 2024 March 5, 2024
Temperature / Humidity 18 deg. C / 45 % RH 22 deg. C / 39 % RH 20 deg. C / 40 % RH 20 deg. C / 41 % RH
Engineer Shousei Hamaguchi (1 GHz to 6 GHz) Hiroyuki Furutaka (6 GHz to 10 GHz) Takumi Nishida (10 GHz to 18 GHz) Hiroyuki Furutaka (18 GHz to 26.5 GHz)

Semi Anechoic Chamber No.3
Date March 7, 2024
Temperature / Humidity 21 deg. C / 31 % RH
Engineer Hiroyuki Furutaka (26.5 GHz to 40 GHz)
Mode Tx 11ac-20 5825 MHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	1580.0	45.3	39.2	25.0	3.9	33.1	-	41.1	35.0	73.9	53.9	32.8	18.9	
Hori.	2225.3	44.9	39.1	28.2	4.3	31.9	-	45.5	39.7	73.9	53.9	28.4	14.2	
Hori.	2500.0	43.3	35.5	27.7	4.5	31.7	-	43.7	36.0	68.2	53.9	24.5	17.9	
Hori.	2818.6	43.0	36.0	28.5	4.6	31.6	-	44.6	37.5	73.9	53.9	29.3	16.4	
Hori.	3159.9	46.0	-	28.9	4.8	31.4	-	48.3	-	68.2	-	19.9	-	
Hori.	5000.0	43.0	38.2	31.8	5.6	30.8	-	49.5	44.7	73.9	53.9	24.4	9.2	
Hori.	5850.0	42.0	-	32.7	5.9	31.1	-	49.5	-	122.2	-	72.7	-	
Hori.	5855.0	41.7	-	32.7	5.9	31.1	-	49.2	-	110.8	-	61.6	-	
Hori.	5875.0	40.6	-	32.7	5.9	31.1	-	48.2	-	105.2	-	57.1	-	
Hori.	5925.0	40.3	-	32.8	5.9	31.1	-	47.9	-	68.2	-	20.3	-	
Hori.	10000.0	47.7	-	36.5	-2.7	33.1	-	48.3	-	68.2	-	19.9	-	
Hori.	11650.0	41.1	33.4	37.8	-2.1	33.0	-	43.8	36.1	73.9	53.9	30.2	17.9	Floor noise
Hori.	17475.0	42.4	-	40.2	-0.6	32.3	-	49.8	-	68.2	-	18.4	-	Floor noise
Vert.	1580.0	47.9	43.3	25.0	3.9	33.1	-	43.7	39.1	73.9	53.9	30.2	14.8	
Vert.	2225.3	44.8	38.6	28.2	4.3	31.9	-	45.4	39.2	73.9	53.9	28.5	14.7	
Vert.	2500.0	42.4	36.0	27.7	4.5	31.7	-	42.9	36.5	68.2	53.9	25.3	17.4	
Vert.	2818.6	47.2	40.9	28.5	4.6	31.6	-	48.7	42.4	73.9	53.9	25.2	11.5	
Vert.	3159.9	45.2	-	28.9	4.8	31.4	-	47.4	-	68.2	-	20.8	-	
Vert.	5000.0	42.3	37.2	31.8	5.6	30.8	-	48.8	43.7	73.9	53.9	25.1	10.2	
Vert.	5850.0	41.4	-	32.7	5.9	31.1	-	48.9	-	122.2	-	73.3	-	
Vert.	5855.0	41.3	-	32.7	5.9	31.1	-	48.8	-	110.8	-	62.0	-	
Vert.	5875.0	41.1	-	32.7	5.9	31.1	-	48.7	-	105.2	-	56.6	-	
Vert.	5925.0	40.5	-	32.8	5.9	31.1	-	48.1	-	68.2	-	20.1	-	
Vert.	10000.0	46.3	-	36.5	-2.7	33.1	-	46.9	-	68.2	-	21.3	-	
Vert.	11650.0	41.0	33.2	37.8	-2.1	33.0	-	43.7	35.9	73.9	53.9	30.3	18.1	Floor noise
Vert.	17475.0	42.4	-	40.2	-0.6	32.3	-	49.8	-	68.2	-	18.4	-	Floor noise



Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)
 Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor
 *Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).
 *QP detector was used up to 1GHz.

Distance factor: 1 GHz - 6 GHz 20log (3.8 m / 3.0 m) = 2.06 dB
 6 GHz - 10 GHz 20log (4.8 m / 3.0 m) = 4.09 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Test Place
Semi Anechoic Chamber
Date
Temperature / Humidity
Engineer
Mode

Ise EMC Lab.
No.4
February 25, 2024
18 deg. C / 45 % RH
Shousei Hamaguchi
(1 GHz to 6 GHz)
Tx 11ac-20 5825 MHz

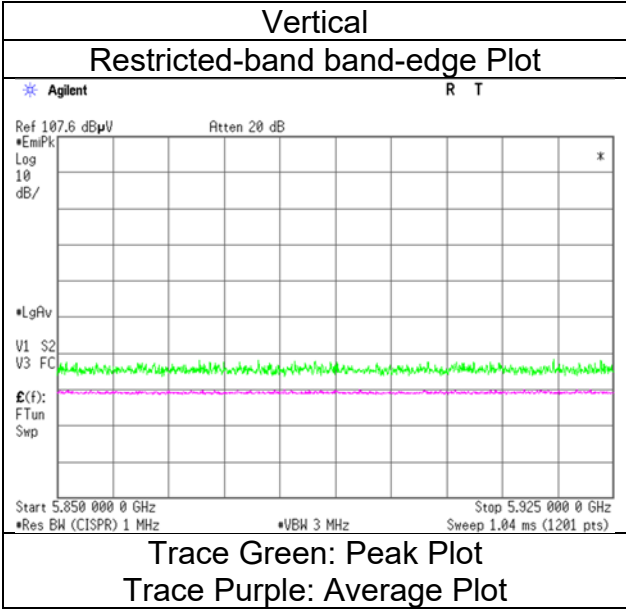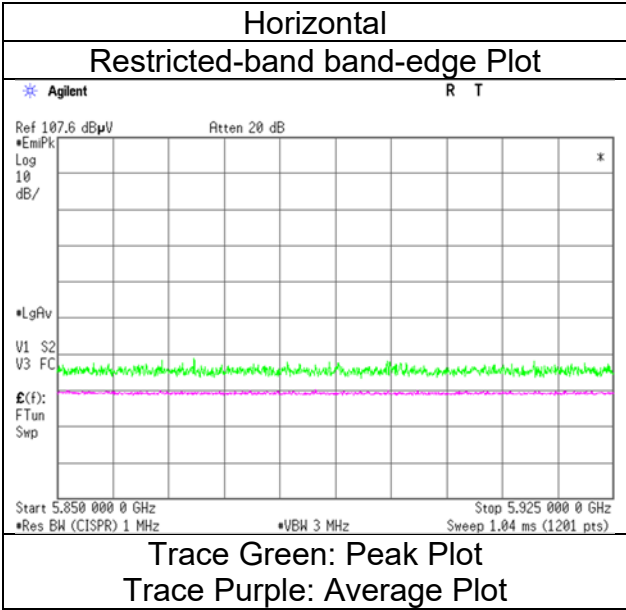

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test Place	Ise EMC Lab.			
Semi Anechoic Chamber	No.4	No.3	No.3	No.3
Date	February 22, 2024	February 25, 2024	March 5, 2024	March 5, 2024
Temperature / Humidity	20 deg. C / 52 % RH	22 deg. C / 39 % RH	20 deg. C / 40 % RH	20 deg. C / 41 % RH
Engineer	Yuichiro Yamazaki (1 GHz to 6 GHz)	Hiroyuki Furutaka (6 GHz to 10 GHz)	Takumi Nishida (10 GHz to 18 GHz)	Hiroyuki Furutaka (18 GHz to 26.5 GHz)

Semi Anechoic Chamber No.3
 Date March 7, 2024
 Temperature / Humidity 21 deg. C / 31 % RH
 Engineer Hiroyuki Furutaka
 (26.5 GHz to 40 GHz)
 Mode Tx 11ac-40 5190 MHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	1580.0	46.7	39.8	25.0	3.9	33.1	-	42.5	35.6	73.9	53.9	31.4	18.3	
Hori.	2225.3	44.5	35.1	28.2	4.3	31.9	-	45.1	35.7	73.9	53.9	28.8	18.2	
Hori.	2500.0	43.5	34.8	27.7	4.5	31.7	-	44.0	35.2	68.2	53.9	24.2	18.7	
Hori.	2818.6	47.2	39.8	28.5	4.6	31.6	-	48.8	41.3	73.9	53.9	25.2	12.6	
Hori.	3159.9	51.6	-	28.9	4.8	31.4	-	53.8	-	68.2	-	14.4	-	
Hori.	5000.0	42.9	36.3	31.8	5.6	30.8	-	49.4	42.8	73.9	53.9	24.5	11.1	
Hori.	5150.0	50.3	35.7	32.1	5.6	30.9	3.3	57.2	45.8	73.9	53.9	16.7	8.1	*1)
Hori.	10000.0	47.6	-	36.5	-2.7	33.1	-	48.2	-	68.2	-	20.0	-	
Hori.	10380.0	41.2	-	36.1	-2.6	33.1	-	41.5	-	68.2	-	26.7	-	Floor noise
Hori.	15570.0	42.3	34.0	39.4	-0.7	32.2	-	48.8	40.5	73.9	53.9	25.1	13.4	Floor noise
Vert.	1580.0	49.2	42.9	25.0	3.9	33.1	-	45.0	38.7	73.9	53.9	28.9	15.2	
Vert.	2225.3	46.4	38.5	28.2	4.3	31.9	-	47.0	39.1	73.9	53.9	26.9	14.8	
Vert.	2500.0	43.7	34.6	27.7	4.5	31.7	-	44.1	35.1	68.2	53.9	24.1	18.8	
Vert.	2818.6	46.7	41.8	28.5	4.6	31.6	-	48.2	43.4	73.9	53.9	25.7	10.5	
Vert.	3159.9	50.9	-	28.9	4.8	31.4	-	53.2	-	68.2	-	15.1	-	
Vert.	5000.0	43.8	38.9	31.8	5.6	30.8	-	50.3	45.4	73.9	53.9	23.6	8.5	
Vert.	5150.0	48.4	33.8	32.1	5.6	30.9	3.3	55.3	44.0	73.9	53.9	18.6	9.9	*1)
Vert.	10000.0	46.2	-	36.5	-2.7	33.1	-	46.8	-	68.2	-	21.4	-	
Vert.	10380.0	41.0	-	36.1	-2.6	33.1	-	41.3	-	68.2	-	26.9	-	Floor noise
Vert.	15570.0	42.4	34.1	39.4	-0.7	32.2	-	48.9	40.6	73.9	53.9	25.0	13.3	Floor noise



Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)
 Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor
 *Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).
 *QP detector was used up to 1GHz.
 *1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 6 GHz 20log (3.8 m / 3.0 m) = 2.06 dB
 6 GHz - 10 GHz 20log (4.8 m / 3.0 m) = 4.09 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Test Place
Semi Anechoic Chamber
Date
Temperature / Humidity
Engineer
Mode

Ise EMC Lab.
No.4
February 22, 2024
20 deg. C / 52 % RH
Yuichiro Yamazaki
(1 GHz to 6 GHz)
Tx 11ac-40 5190 MHz

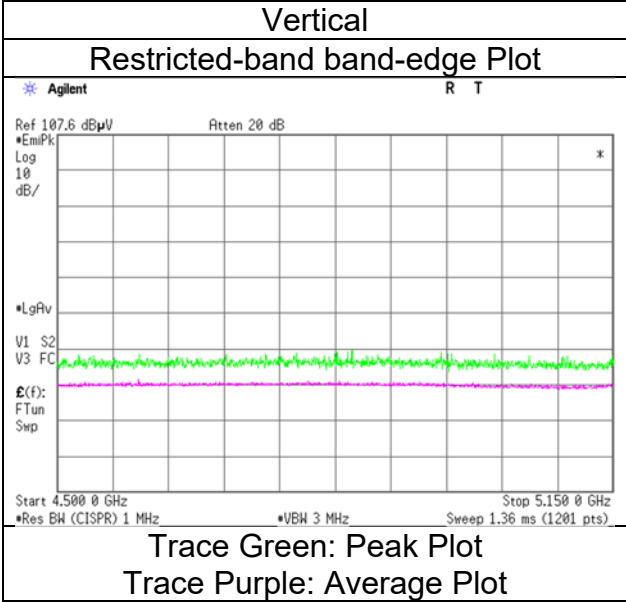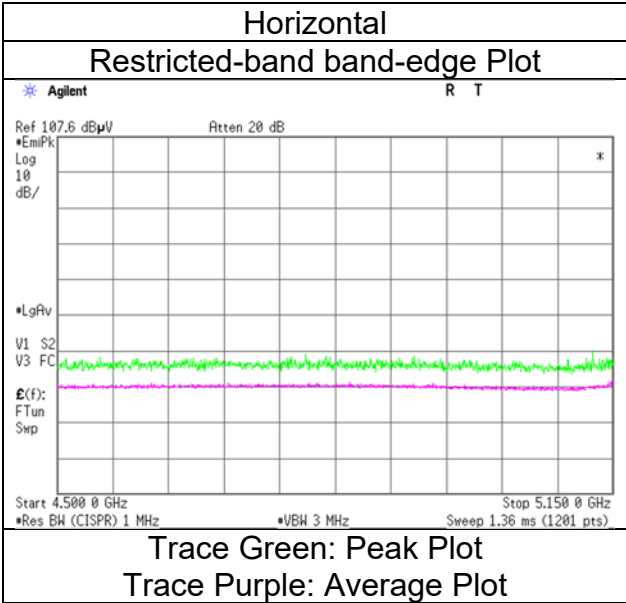

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test Place	Ise EMC Lab.			
Semi Anechoic Chamber	No.4	No.3	No.3	No.3
Date	February 22, 2024	February 25, 2024	March 5, 2024	March 5, 2024
Temperature / Humidity	20 deg. C / 52 % RH	22 deg. C / 39 % RH	20 deg. C / 40 % RH	20 deg. C / 41 % RH
Engineer	Yuichiro Yamazaki (1 GHz to 6 GHz)	Hiroyuki Furutaka (6 GHz to 10 GHz)	Takumi Nishida (10 GHz to 18 GHz)	Hiroyuki Furutaka (18 GHz to 26.5 GHz)
Semi Anechoic Chamber	No.3			
Date	March 7, 2024			
Temperature / Humidity	21 deg. C / 31 % RH			
Engineer	Hiroyuki Furutaka (26.5 GHz to 40 GHz)			
Mode	Tx 11ac-40 5230 MHz			

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	1580.0	47.1	40.3	25.0	3.9	33.1	-	42.9	36.1	73.9	53.9	31.0	17.8	
Hori.	2225.3	44.8	35.4	28.2	4.3	31.9	-	45.4	36.0	73.9	53.9	28.5	17.9	
Hori.	2500.0	43.8	34.4	27.7	4.5	31.7	-	44.2	34.9	68.2	53.9	24.0	19.0	
Hori.	2818.6	46.9	39.8	28.5	4.6	31.6	-	48.4	41.3	73.9	53.9	25.5	12.6	
Hori.	3159.9	51.7	-	28.9	4.8	31.4	-	54.0	-	68.2	-	14.2	-	
Hori.	5000.0	42.2	36.4	31.8	5.6	30.8	-	48.7	42.9	73.9	53.9	25.2	11.0	
Hori.	5350.0	40.8	32.3	31.8	5.7	30.9	3.3	47.3	42.1	73.9	53.9	26.6	11.8	*1)
Hori.	10000.0	47.6	-	36.5	-2.7	33.1	-	48.2	-	68.2	-	20.0	-	
Hori.	10460.0	41.2	-	36.1	-2.6	33.1	-	41.6	-	68.2	-	26.6	-	Floor noise
Hori.	15690.0	42.8	34.4	39.6	-0.7	32.2	-	49.5	41.1	73.9	53.9	24.4	12.8	Floor noise
Vert.	1580.0	49.9	43.0	25.0	3.9	33.1	-	45.7	38.8	73.9	53.9	28.2	15.1	
Vert.	2225.3	45.9	39.0	28.2	4.3	31.9	-	46.5	39.6	73.9	53.9	27.4	14.3	
Vert.	2500.0	45.4	35.2	27.7	4.5	31.7	-	45.8	35.7	68.2	53.9	22.4	18.2	
Vert.	2818.6	47.4	41.6	28.5	4.6	31.6	-	49.0	43.2	73.9	53.9	24.9	10.7	
Vert.	3159.9	50.2	-	28.9	4.8	31.4	-	52.5	-	68.2	-	15.8	-	
Vert.	5000.0	44.0	39.0	31.8	5.6	30.8	-	50.5	45.5	73.9	53.9	23.4	8.4	
Vert.	5350.0	40.7	32.2	31.8	5.7	30.9	3.3	47.2	42.0	73.9	53.9	26.7	12.0	*1)
Vert.	10000.0	46.2	-	36.5	-2.7	33.1	-	46.8	-	68.2	-	21.4	-	
Vert.	10460.0	41.0	-	36.1	-2.6	33.1	-	41.4	-	68.2	-	26.8	-	Floor noise
Vert.	15690.0	42.5	34.6	39.6	-0.7	32.2	-	49.2	41.2	73.9	53.9	24.7	12.7	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

*1) Not Out of Band emission(Leakage Power)



Distance factor:	1 GHz - 6 GHz	20log (3.8 m / 3.0 m) = 2.06 dB
	6 GHz - 10 GHz	20log (4.8 m / 3.0 m) = 4.09 dB
	10 GHz - 40 GHz	20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Test Place
Semi Anechoic Chamber
Date
Temperature / Humidity
Engineer

Mode

Ise EMC Lab.
No.4
February 22, 2024
20 deg. C / 52 % RH
Yuichiro Yamazaki
(1 GHz to 6 GHz)
Tx 11ac-40 5230 MHz

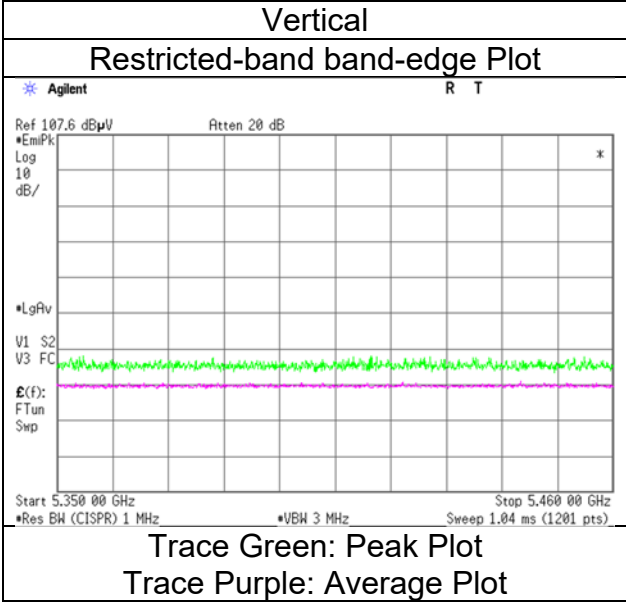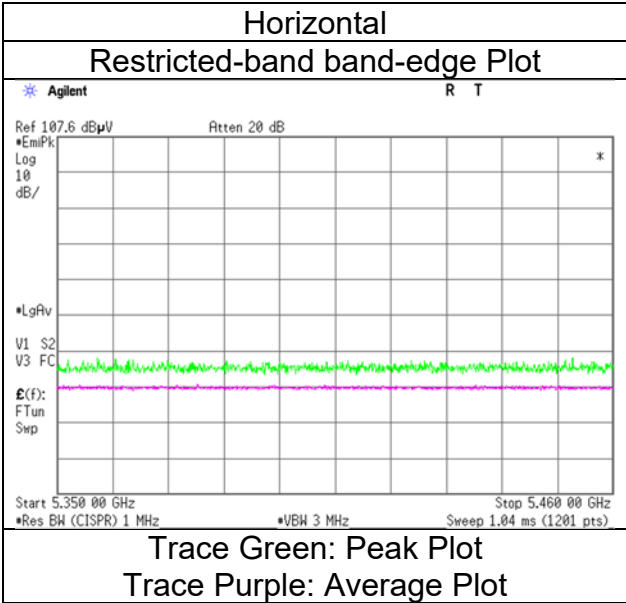

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test Place	Ise EMC Lab.			
Semi Anechoic Chamber	No.4	No.3	No.3	No.3
Date	February 25, 2024	February 25, 2024	March 5, 2024	March 5, 2024
Temperature / Humidity	18 deg. C / 45 % RH	22 deg. C / 39 % RH	20 deg. C / 40 % RH	20 deg. C / 41 % RH
Engineer	Shousei Hamaguchi (1 GHz to 6 GHz)	Hiroyuki Furutaka (6 GHz to 10 GHz)	Takumi Nishida (10 GHz to 18 GHz)	Hiroyuki Furutaka (18 GHz to 26.5 GHz)
Semi Anechoic Chamber	No.3			
Date	March 7, 2024			
Temperature / Humidity	21 deg. C / 31 % RH			
Engineer	Hiroyuki Furutaka (26.5 GHz to 40 GHz)			
Mode	Tx 11ac-40 5755 MHz			

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	1580.0	45.4	39.3	25.0	3.9	33.1	-	41.2	35.1	73.9	53.9	32.7	18.8	
Hori.	2225.3	44.3	39.1	28.2	4.3	31.9	-	44.9	39.7	73.9	53.9	29.0	14.2	
Hori.	2500.0	43.8	35.4	27.7	4.5	31.7	-	44.3	35.8	68.2	53.9	23.9	18.1	
Hori.	2818.6	43.4	36.0	28.5	4.6	31.6	-	44.9	37.5	73.9	53.9	29.0	16.4	
Hori.	3159.9	46.0	-	28.9	4.8	31.4	-	48.3	-	68.2	-	19.9	-	
Hori.	5000.0	43.1	38.5	31.8	5.6	30.8	-	49.6	45.0	73.9	53.9	24.3	9.0	
Hori.	5650.0	40.8	-	32.2	5.8	31.0	-	47.7	-	68.2	-	20.5	-	
Hori.	5700.0	40.9	-	32.3	5.8	31.0	-	48.0	-	105.2	-	57.2	-	
Hori.	5720.0	48.5	-	32.3	5.8	31.0	-	55.6	-	110.8	-	55.2	-	
Hori.	5725.0	49.8	-	32.4	5.8	31.0	-	57.0	-	122.2	-	65.2	-	
Hori.	10000.0	47.8	-	36.5	-2.7	33.1	-	48.4	-	68.2	-	19.8	-	
Hori.	11510.0	41.2	33.2	37.7	-2.2	33.1	-	43.7	35.7	73.9	53.9	30.2	18.2	Floor noise
Hori.	17265.0	42.6	-	40.0	-0.6	32.3	-	49.7	-	68.2	-	18.5	-	Floor noise
Vert.	1580.0	47.9	43.3	25.0	3.9	33.1	-	43.7	39.1	73.9	53.9	30.2	14.8	
Vert.	2225.3	44.8	38.6	28.2	4.3	31.9	-	45.5	39.2	73.9	53.9	28.5	14.7	
Vert.	2500.0	42.7	36.0	27.7	4.5	31.7	-	43.2	36.5	68.2	53.9	25.0	17.4	
Vert.	2818.6	47.8	40.7	28.5	4.6	31.6	-	49.4	42.3	73.9	53.9	24.5	11.6	
Vert.	3159.9	45.2	-	28.9	4.8	31.4	-	47.5	-	68.2	-	20.7	-	
Vert.	5000.0	42.1	37.2	31.8	5.6	30.8	-	48.6	43.7	73.9	53.9	25.3	10.2	
Vert.	5650.0	40.5	-	32.2	5.8	31.0	-	47.5	-	68.2	-	20.7	-	
Vert.	5700.0	40.6	-	32.3	5.8	31.0	-	47.7	-	105.2	-	57.5	-	
Vert.	5720.0	45.8	-	32.3	5.8	31.0	-	53.0	-	110.8	-	57.8	-	
Vert.	5725.0	46.7	-	32.4	5.8	31.0	-	53.9	-	122.2	-	68.3	-	
Vert.	10000.0	46.2	-	36.5	-2.7	33.1	-	46.8	-	68.2	-	21.4	-	
Vert.	11510.0	41.0	33.1	37.7	-2.2	33.1	-	43.5	35.6	73.9	53.9	30.4	18.3	Floor noise
Vert.	17265.0	42.8	-	40.0	-0.6	32.3	-	49.9	-	68.2	-	18.3	-	Floor noise



Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)
 Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor
 *Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).
 *QP detector was used up to 1GHz.

Distance factor: 1 GHz - 6 GHz 20log (3.8 m / 3.0 m) = 2.06 dB
 6 GHz - 10 GHz 20log (4.8 m / 3.0 m) = 4.09 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Test Place
Semi Anechoic Chamber
Date
Temperature / Humidity
Engineer
Mode

Ise EMC Lab.
No.4
February 25, 2024
18 deg. C / 45 % RH
Shousei Hamaguchi
(1 GHz to 6 GHz)
Tx 11ac-40 5755 MHz

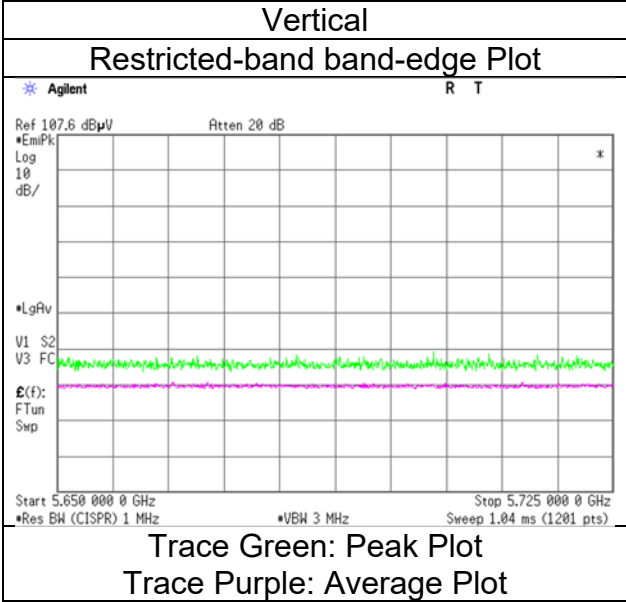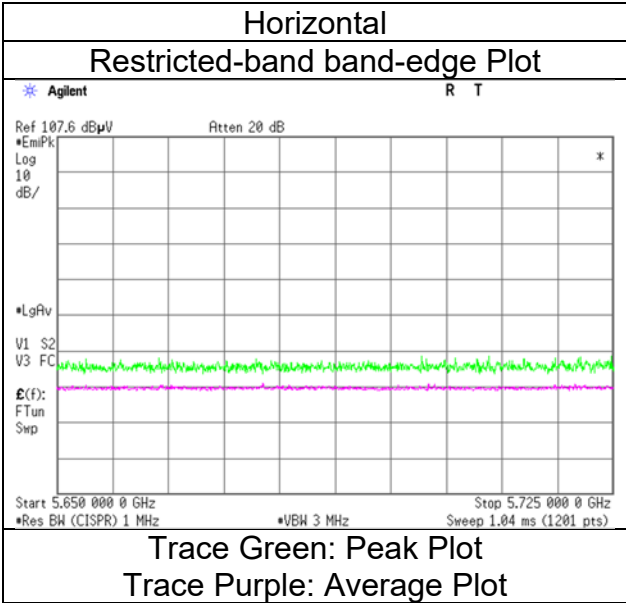

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test Place Ise EMC Lab.
Semi Anechoic Chamber No.4 No.3 No.3 No.3
Date February 25, 2024 February 25, 2024 March 5, 2024 March 5, 2024
Temperature / Humidity 18 deg. C / 45 % RH 22 deg. C / 39 % RH 20 deg. C / 40 % RH 20 deg. C / 41 % RH
Engineer Shousei Hamaguchi (1 GHz to 6 GHz) Hiroyuki Furutaka (6 GHz to 10 GHz) Takumi Nishida (10 GHz to 18 GHz) Hiroyuki Furutaka (18 GHz to 26.5 GHz)

Semi Anechoic Chamber No.3
Date March 7, 2024
Temperature / Humidity 21 deg. C / 31 % RH
Engineer Hiroyuki Furutaka (26.5 GHz to 40 GHz)
Mode Tx 11ac-40 5795 MHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	1580.0	45.4	39.3	25.0	3.9	33.1	-	41.2	35.1	73.9	53.9	32.7	18.8	
Hori.	2225.3	44.3	39.1	28.2	4.3	31.9	-	44.9	39.7	73.9	53.9	29.0	14.2	
Hori.	2500.0	43.8	35.4	27.7	4.5	31.7	-	44.3	35.8	68.2	53.9	23.9	18.1	
Hori.	2818.6	43.4	36.0	28.5	4.6	31.6	-	44.9	37.5	73.9	53.9	29.0	16.4	
Hori.	3159.9	46.0	-	28.9	4.8	31.4	-	48.3	-	68.2	-	19.9	-	
Hori.	5000.0	43.1	38.5	31.8	5.6	30.8	-	49.6	45.0	73.9	53.9	24.3	9.0	
Hori.	5850.0	41.4	-	32.7	5.9	31.1	-	48.9	-	122.2	-	73.3	-	
Hori.	5855.0	41.3	-	32.7	5.9	31.1	-	48.7	-	110.8	-	62.1	-	
Hori.	5875.0	40.9	-	32.7	5.9	31.1	-	48.4	-	105.2	-	56.8	-	
Hori.	5925.0	40.4	-	32.8	5.9	31.1	-	48.0	-	68.2	-	20.2	-	
Hori.	10000.0	47.5	-	36.5	-2.7	33.1	-	48.1	-	68.2	-	20.1	-	
Hori.	11590.0	41.3	33.1	37.8	-2.2	33.0	-	43.9	35.7	73.9	53.9	30.1	18.3	Floor noise
Hori.	17385.0	42.5	-	40.1	-0.6	32.3	-	49.7	-	68.2	-	18.5	-	Floor noise
Vert.	1580.0	47.9	43.3	25.0	3.9	33.1	-	43.7	39.1	73.9	53.9	30.2	14.8	
Vert.	2225.3	44.8	38.6	28.2	4.3	31.9	-	45.5	39.2	73.9	53.9	28.5	14.7	
Vert.	2500.0	42.7	36.0	27.7	4.5	31.7	-	43.2	36.5	68.2	53.9	25.0	17.4	
Vert.	2818.6	47.8	40.7	28.5	4.6	31.6	-	49.4	42.3	73.9	53.9	24.5	11.6	
Vert.	3159.9	45.2	-	28.9	4.8	31.4	-	47.5	-	68.2	-	20.7	-	
Vert.	5000.0	42.1	37.2	31.8	5.6	30.8	-	48.6	43.7	73.9	53.9	25.3	10.2	
Vert.	5850.0	41.4	-	32.7	5.9	31.1	-	48.9	-	122.2	-	73.3	-	
Vert.	5855.0	40.9	-	32.7	5.9	31.1	-	48.4	-	110.8	-	62.4	-	
Vert.	5875.0	40.9	-	32.7	5.9	31.1	-	48.4	-	105.2	-	56.8	-	
Vert.	5925.0	40.5	-	32.8	5.9	31.1	-	48.1	-	68.2	-	20.1	-	
Vert.	10000.0	46.3	-	36.5	-2.7	33.1	-	46.9	-	68.2	-	21.3	-	
Vert.	11590.0	41.2	33.2	37.8	-2.2	33.0	-	43.8	35.8	73.9	53.9	30.2	18.2	Floor noise
Vert.	17385.0	42.5	-	40.1	-0.6	32.3	-	49.8	-	68.2	-	18.4	-	Floor noise



Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)
 Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor
 *Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).
 *QP detector was used up to 1GHz.

Distance factor: 1 GHz - 6 GHz 20log (3.8 m / 3.0 m) = 2.06 dB
 6 GHz - 10 GHz 20log (4.8 m / 3.0 m) = 4.09 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Test Place
 Semi Anechoic Chamber
 Date
 Temperature / Humidity
 Engineer
 Mode

Ise EMC Lab.
 No.4
 February 25, 2024
 18 deg. C / 45 % RH
 Shousei Hamaguchi
 (1 GHz to 6 GHz)
 Tx 11ac-40 5795 MHz

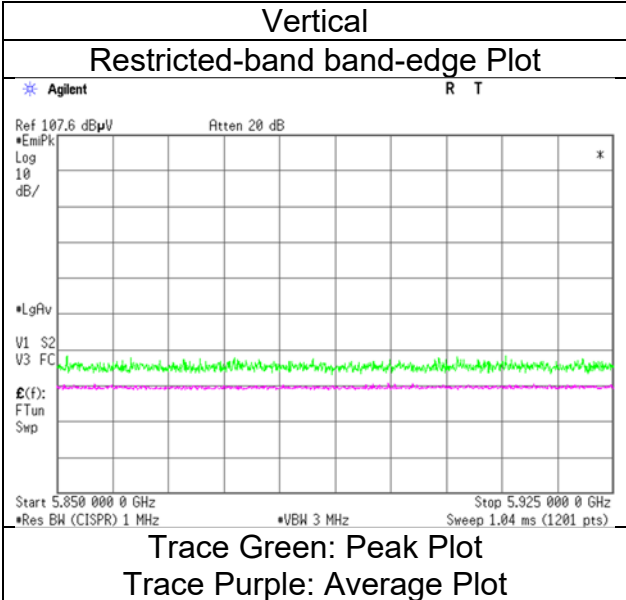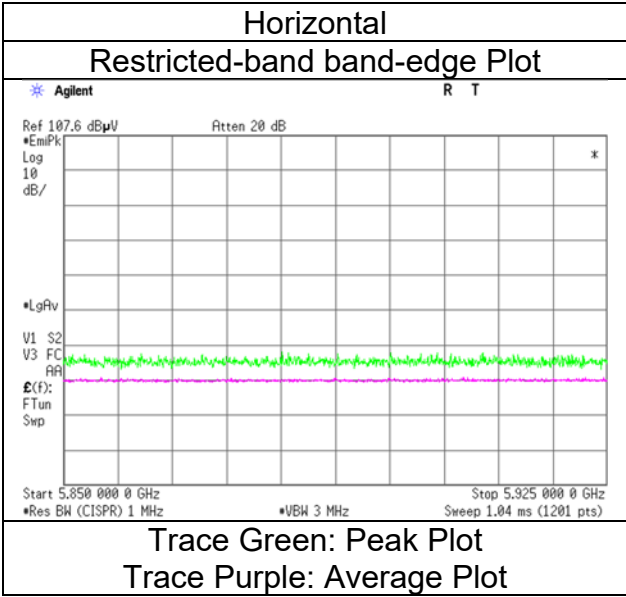

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
 Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test Place	Ise EMC Lab.			
Semi Anechoic Chamber	No.4	No.3	No.3	No.3
Date	February 22, 2024	February 25, 2024	March 5, 2024	March 5, 2024
Temperature / Humidity	20 deg. C / 52 % RH	22 deg. C / 39 % RH	20 deg. C / 40 % RH	20 deg. C / 41 % RH
Engineer	Yuichiro Yamazaki (1 GHz to 6 GHz)	Hiroyuki Furutaka (6 GHz to 10 GHz)	Takumi Nishida (10 GHz to 18 GHz)	Hiroyuki Furutaka (18 GHz to 26.5 GHz)

Semi Anechoic Chamber No.3
Date March 7, 2024
Temperature / Humidity 21 deg. C / 31 % RH
Engineer Hiroyuki Furutaka
(26.5 GHz to 40 GHz)
Mode Tx 11ac-80 5210 MHz



Polarity [Hori/Vert]	Frequency [MHz]	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
Hori.	1580.0	46.8	39.8	25.0	3.9	33.1	-	42.6	35.6	73.9	53.9	31.3	18.3	
Hori.	2225.3	44.8	35.2	28.2	4.3	31.9	-	45.4	35.8	73.9	53.9	28.5	18.1	
Hori.	2500.0	43.3	34.1	27.7	4.5	31.7	-	43.7	34.6	68.2	53.9	24.5	19.3	
Hori.	2818.6	46.8	40.0	28.5	4.6	31.6	-	48.3	41.6	73.9	53.9	25.6	12.4	
Hori.	3159.9	51.1	-	28.9	4.8	31.4	-	53.3	-	68.2	-	14.9	-	
Hori.	5000.0	42.9	36.1	31.8	5.6	30.8	-	49.4	42.6	73.9	53.9	24.5	11.3	
Hori.	5150.0	50.1	34.8	32.1	5.6	30.9	4.7	57.0	46.4	73.9	53.9	16.9	7.5	*1)
Hori.	5350.0	41.4	32.8	31.8	5.7	30.9	4.7	47.9	44.0	73.9	53.9	26.0	9.9	*1)
Hori.	10000.0	47.6	-	36.5	-2.7	33.1	-	48.2	-	68.2	-	20.0	-	
Hori.	10420.0	41.1	-	36.1	-2.6	33.1	-	41.4	-	68.2	-	26.8	-	Floor noise
Hori.	15630.0	42.3	33.5	39.5	-0.7	32.2	-	48.9	40.1	73.9	53.9	25.0	13.8	Floor noise
Vert.	1580.0	49.8	43.6	25.0	3.9	33.1	-	45.6	39.4	73.9	53.9	28.3	14.5	
Vert.	2225.3	45.4	39.0	28.2	4.3	31.9	-	46.0	39.6	73.9	53.9	27.9	14.3	
Vert.	2500.0	45.6	35.4	27.7	4.5	31.7	-	46.1	35.9	68.2	53.9	22.1	18.0	
Vert.	2818.6	47.6	41.2	28.5	4.6	31.6	-	49.1	42.8	73.9	53.9	24.8	11.1	
Vert.	3159.9	50.5	-	28.9	4.8	31.4	-	52.7	-	68.2	-	15.5	-	
Vert.	5000.0	44.1	39.0	31.8	5.6	30.8	-	50.6	45.5	73.9	53.9	23.3	8.4	
Vert.	5150.0	49.4	34.7	32.1	5.6	30.9	4.7	56.3	46.3	73.9	53.9	17.6	7.6	*1)
Vert.	5350.0	40.3	32.3	31.8	5.7	30.9	4.7	46.9	43.5	73.9	53.9	27.1	10.4	*1)
Vert.	10000.0	46.3	-	36.5	-2.7	33.1	-	46.9	-	68.2	-	21.3	-	
Vert.	10420.0	41.3	-	36.1	-2.6	33.1	-	41.6	-	68.2	-	26.6	-	Floor noise
Vert.	15630.0	42.2	33.4	39.5	-0.7	32.2	-	48.8	40.0	73.9	53.9	25.1	13.9	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)
 Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor
 *Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).
 *QP detector was used up to 1GHz.
 *1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 6 GHz 20log (3.8 m / 3.0 m) = 2.06 dB
 6 GHz - 10 GHz 20log (4.8 m / 3.0 m) = 4.09 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Test Place	Ise EMC Lab.
Semi Anechoic Chamber	No.4
Date	February 22, 2024
Temperature / Humidity	20 deg. C / 52 % RH
Engineer	Yuichiro Yamazaki
	(1 GHz to 6 GHz)
Mode	Tx 11ac-80 5210 MHz

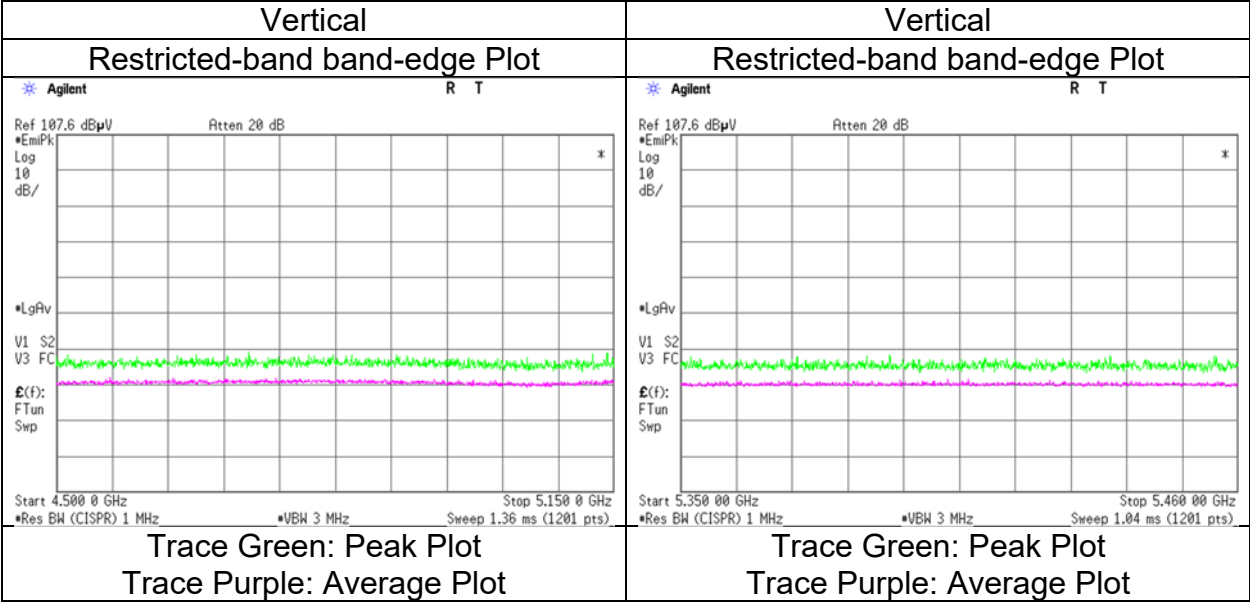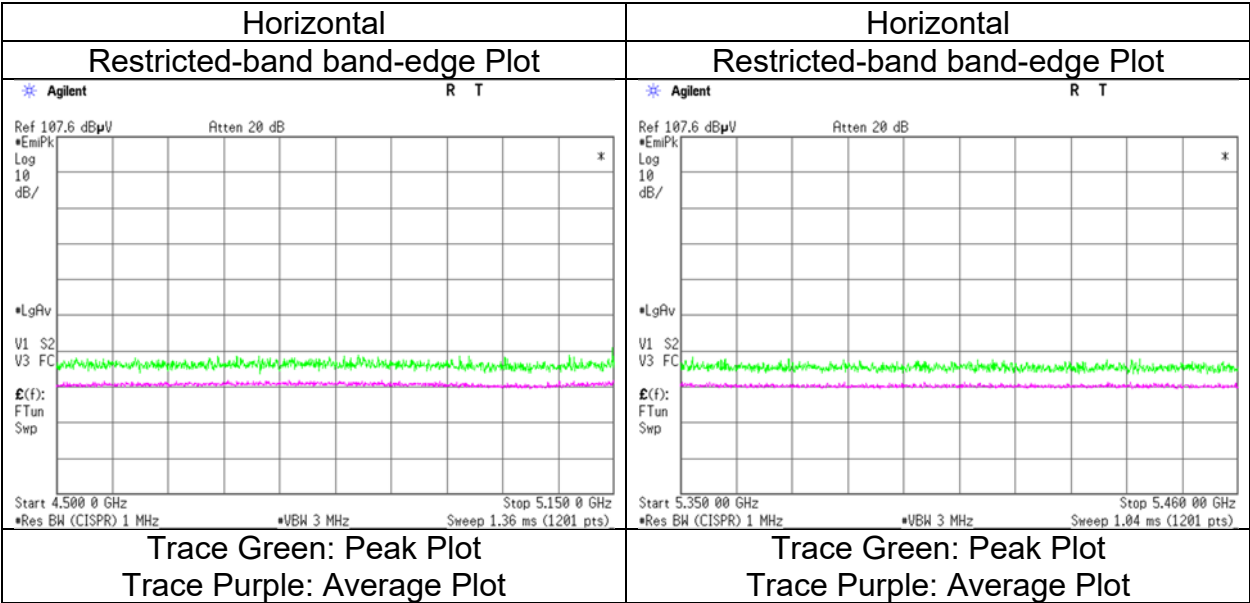

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
 Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test Place	Ise EMC Lab.			
Semi Anechoic Chamber	No.4	No.3	No.3	No.3
Date	February 25, 2024	February 25, 2024	March 5, 2024	March 5, 2024
Temperature / Humidity	18 deg. C / 45 % RH	22 deg. C / 39 % RH	20 deg. C / 40 % RH	20 deg. C / 41 % RH
Engineer	Shousei Hamaguchi (1 GHz to 6 GHz)	Hiroyuki Furutaka (6 GHz to 10 GHz)	Takumi Nishida (10 GHz to 18 GHz)	Hiroyuki Furutaka (18 GHz to 26.5 GHz)
Semi Anechoic Chamber	No.3			
Date	March 7, 2024			
Temperature / Humidity	21 deg. C / 31 % RH			
Engineer	Hiroyuki Furutaka (26.5 GHz to 40 GHz)			
Mode	Tx 11ac-80 5775 MHz			

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	1580.0	45.4	39.3	25.0	3.9	33.1	-	41.2	35.1	73.9	53.9	32.7	18.8	
Hori.	2225.3	44.3	39.1	28.2	4.3	31.9	-	44.9	39.7	73.9	53.9	29.0	14.2	
Hori.	2500.0	43.8	35.4	27.7	4.5	31.7	-	44.3	35.8	68.2	53.9	23.9	18.1	
Hori.	2818.6	43.4	36.0	28.5	4.6	31.6	-	44.9	37.5	73.9	53.9	29.0	16.4	
Hori.	3159.9	46.0	-	28.9	4.8	31.4	-	48.3	-	68.2	-	19.9	-	
Hori.	5000.0	43.1	38.5	31.8	5.6	30.8	-	49.6	45.0	73.9	53.9	24.3	9.0	
Hori.	5650.0	41.6	-	32.2	5.8	31.0	-	48.6	-	68.2	-	19.6	-	
Hori.	5700.0	42.2	-	32.3	5.8	31.0	-	49.3	-	105.2	-	55.9	-	
Hori.	5720.0	47.5	-	32.3	5.8	31.0	-	54.6	-	110.8	-	56.2	-	
Hori.	5725.0	49.2	-	32.4	5.8	31.0	-	56.4	-	122.2	-	65.8	-	
Hori.	5850.0	43.1	-	32.7	5.9	31.1	-	50.6	-	122.2	-	71.6	-	
Hori.	5855.0	42.6	-	32.7	5.9	31.1	-	50.1	-	110.8	-	60.7	-	
Hori.	5875.0	41.6	-	32.7	5.9	31.1	-	49.2	-	105.2	-	56.1	-	
Hori.	5925.0	41.4	-	32.8	5.9	31.1	-	49.0	-	68.2	-	19.2	-	
Hori.	10000.0	47.8	-	36.5	-2.7	33.1	-	48.4	-	68.2	-	19.8	-	
Hori.	11550.0	41.3	33.0	37.7	-2.2	33.0	-	43.8	35.5	73.9	53.9	30.1	18.4	Floor noise
Hori.	17325.0	42.5	-	40.0	-0.6	32.3	-	49.6	-	68.2	-	18.6	-	Floor noise
Vert.	1580.0	47.9	43.3	25.0	3.9	33.1	-	43.7	39.1	73.9	53.9	30.2	14.8	
Vert.	2225.3	44.8	38.6	28.2	4.3	31.9	-	45.5	39.2	73.9	53.9	28.5	14.7	
Vert.	2500.0	42.7	36.0	27.7	4.5	31.7	-	43.2	36.5	68.2	53.9	25.0	17.4	
Vert.	2818.6	47.8	40.7	28.5	4.6	31.6	-	49.4	42.3	73.9	53.9	24.5	11.6	
Vert.	3159.9	45.2	-	28.9	4.8	31.4	-	47.5	-	68.2	-	20.7	-	
Vert.	5000.0	42.1	37.2	31.8	5.6	30.8	-	48.6	43.7	73.9	53.9	25.3	10.2	
Vert.	5650.0	40.6	-	32.2	5.8	31.0	-	47.6	-	68.2	-	20.6	-	
Vert.	5700.0	41.1	-	32.3	5.8	31.0	-	48.2	-	105.2	-	57.0	-	
Vert.	5720.0	41.6	-	32.3	5.8	31.0	-	48.8	-	110.8	-	62.0	-	
Vert.	5725.0	42.7	-	32.4	5.8	31.0	-	49.8	-	122.2	-	72.4	-	
Vert.	5850.0	41.5	-	32.7	5.9	31.1	-	49.0	-	122.2	-	73.2	-	
Vert.	5855.0	41.4	-	32.7	5.9	31.1	-	48.9	-	110.8	-	61.9	-	
Vert.	5875.0	41.0	-	32.7	5.9	31.1	-	48.5	-	105.2	-	56.7	-	
Vert.	5925.0	40.8	-	32.8	5.9	31.1	-	48.4	-	68.2	-	19.8	-	
Vert.	10000.0	46.4	-	36.5	-2.7	33.1	-	47.0	-	68.2	-	21.2	-	
Vert.	11550.0	41.2	33.1	37.7	-2.2	33.0	-	43.7	35.7	73.9	53.9	30.2	18.3	Floor noise
Vert.	17325.0	42.6	-	40.0	-0.6	32.3	-	49.8	-	68.2	-	18.4	-	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor:	1 GHz - 6 GHz	20log (3.8 m / 3.0 m) = 2.06 dB
	6 GHz - 10 GHz	20log (4.8 m / 3.0 m) = 4.09 dB
	10 GHz - 40 GHz	20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Test Place	Ise EMC Lab.
Semi Anechoic Chamber	No.4
Date	February 25, 2024
Temperature / Humidity	18 deg. C / 45 % RH
Engineer	Shousei Hamaguchi (1 GHz to 6 GHz)
Mode	Tx 11ac-80 5775 MHz

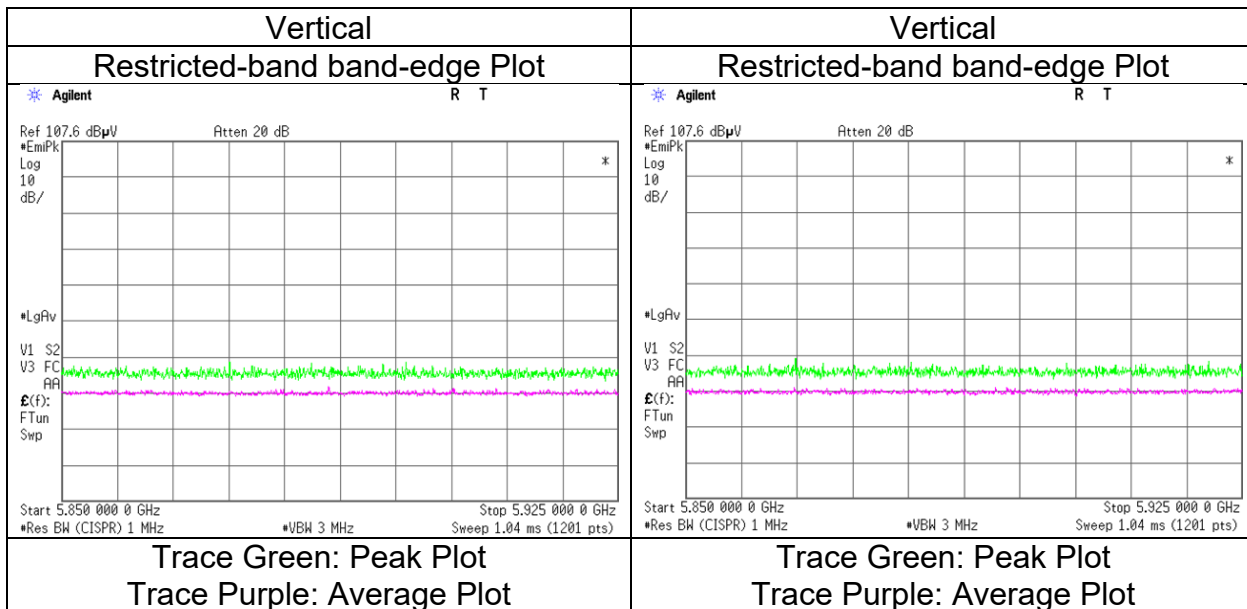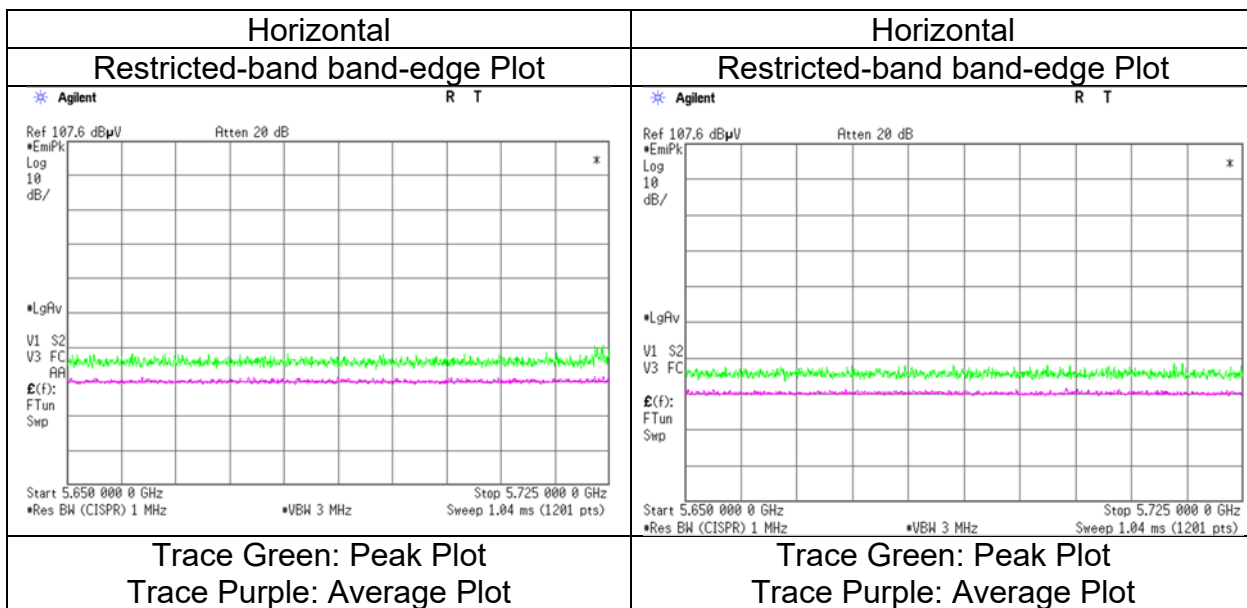

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test Place	Ise EMC Lab.			
Semi Anechoic Chamber	No.3	No.3	No.3	No.3
Date	March 6, 2024	March 7, 2024	March 7, 2024	March 8, 2024
Temperature / Humidity	21 deg. C / 41 % RH	21 deg. C / 31 % RH	21 deg. C / 31 % RH	22 deg. C / 35 % RH
Engineer	Takumi Nishida	Hiroyuki Furutaka	Hiroyuki Furutaka	Hiroyuki Furutaka
	(1 GHz to 10 GHz)	(10 GHz to 26.5 GHz)	(26.5 GHz to 40 GHz)	(Below 1 GHz)
Mode	Tx 11a 5745 MHz + Tx BT DH5 Hopping On			

Polarity [Hori/Vert]	Frequency [MHz]	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
Hori.	1580.0	50.1	43.1	25.1	3.9	33.6	-	45.5	38.5	73.9	53.9	28.4	15.4	
Hori.	3159.9	51.4	-	28.7	4.8	32.1	-	52.8	-	68.2	-	15.4	-	
Hori.	5000.0	43.2	38.5	31.7	5.6	31.4	-	49.0	44.3	73.9	53.9	24.9	9.6	
Hori.	5650.0	49.4	-	31.7	5.8	31.5	-	55.5	-	68.2	-	12.7	-	
Hori.	5700.0	47.0	-	31.8	5.8	31.5	-	53.2	-	105.2	-	52.0	-	
Hori.	5720.0	48.5	-	31.9	5.8	31.5	-	54.8	-	110.8	-	56.0	-	
Hori.	5725.0	46.6	-	31.9	5.8	31.5	-	52.8	-	122.2	-	69.4	-	
Hori.	5850.0	41.6	-	32.2	5.9	31.5	-	48.2	-	122.2	-	74.1	-	
Hori.	5855.0	40.8	-	32.2	5.9	31.5	-	47.4	-	110.8	-	63.4	-	
Hori.	5875.0	40.5	-	32.2	5.9	31.5	-	47.1	-	105.2	-	58.1	-	
Hori.	5925.0	40.0	-	32.3	5.9	31.5	-	46.7	-	68.2	-	21.5	-	
Hori.	10000.0	49.4	-	36.5	-2.7	33.1	-	50.1	-	68.2	-	18.1	-	
Hori.	11490.0	41.1	33.1	37.7	-2.2	33.1	-	43.6	35.6	73.9	53.9	30.3	18.3	Floor noise
Hori.	17235.0	43.1	-	39.9	-0.5	32.3	-	50.3	-	68.2	-	18.0	-	Floor noise
Vert.	1580.0	56.3	46.1	25.1	3.9	33.6	-	51.7	41.5	73.9	53.9	22.2	12.4	
Vert.	3159.9	50.5	-	28.7	4.8	32.1	-	51.9	-	68.2	-	16.3	-	
Vert.	5000.0	43.6	37.3	31.7	5.6	31.4	-	49.4	43.1	73.9	53.9	24.5	10.8	
Vert.	5650.0	48.3	-	31.7	5.8	31.5	-	54.4	-	68.2	-	13.8	-	
Vert.	5700.0	47.2	-	31.8	5.8	31.5	-	53.4	-	105.2	-	51.8	-	
Vert.	5720.0	47.9	-	31.9	5.8	31.5	-	54.1	-	110.8	-	56.7	-	
Vert.	5725.0	46.0	-	31.9	5.8	31.5	-	52.3	-	122.2	-	69.9	-	
Vert.	5850.0	41.2	-	32.2	5.9	31.5	-	47.8	-	122.2	-	74.4	-	
Vert.	5855.0	40.5	-	32.2	5.9	31.5	-	47.2	-	110.8	-	63.7	-	
Vert.	5875.0	40.3	-	32.2	5.9	31.5	-	47.0	-	105.2	-	58.3	-	
Vert.	5925.0	40.1	-	32.3	5.9	31.5	-	46.8	-	68.2	-	21.4	-	
Vert.	10000.0	47.5	-	36.5	-2.7	33.1	-	48.2	-	68.2	-	20.0	-	
Vert.	11490.0	40.9	33.0	37.7	-2.2	33.1	-	43.4	35.5	73.9	53.9	30.5	18.4	Floor noise
Vert.	17235.0	43.2	-	39.9	-0.5	32.3	-	50.4	-	68.2	-	17.9	-	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor:	1 GHz- 6 GHz	20log (3.8 m / 3.0 m) = 2.06 dB
	6 GHz- 10 GHz	20log (4.8 m / 3.0 m) = 4.09 dB
	10 GHz- 40 GHz	20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission



Test Place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	March 6, 2024
Temperature / Humidity	21 deg. C / 41 % RH
Engineer	Takumi Nishida
	(1 GHz to 10 GHz)
Mode	Tx 11ac-80 5775 MHz

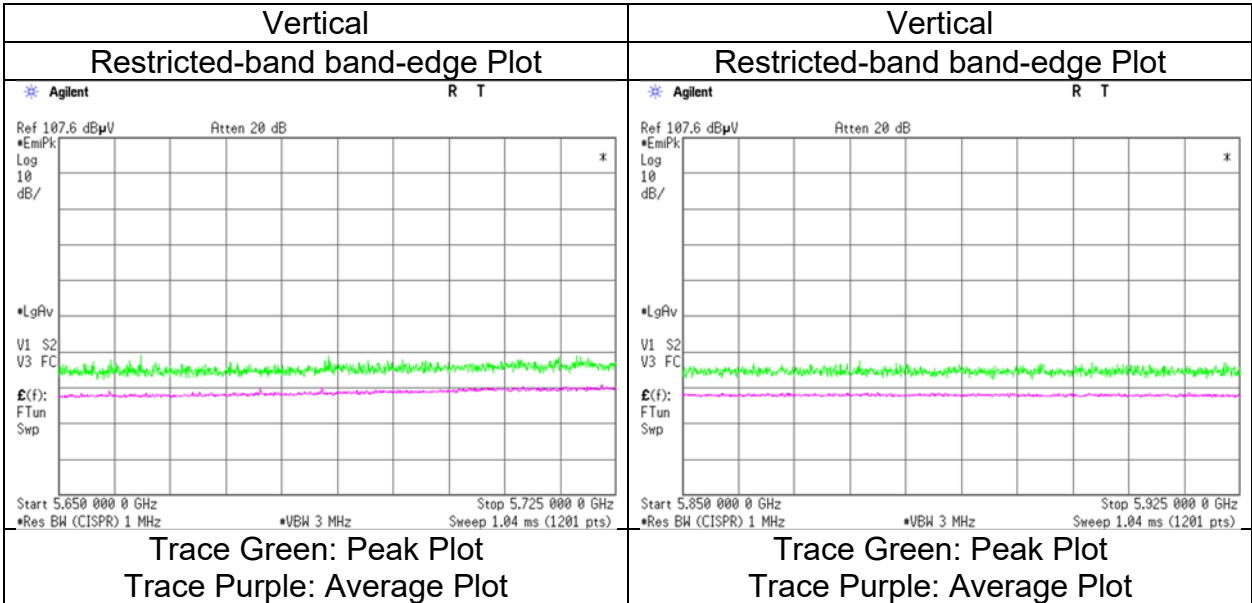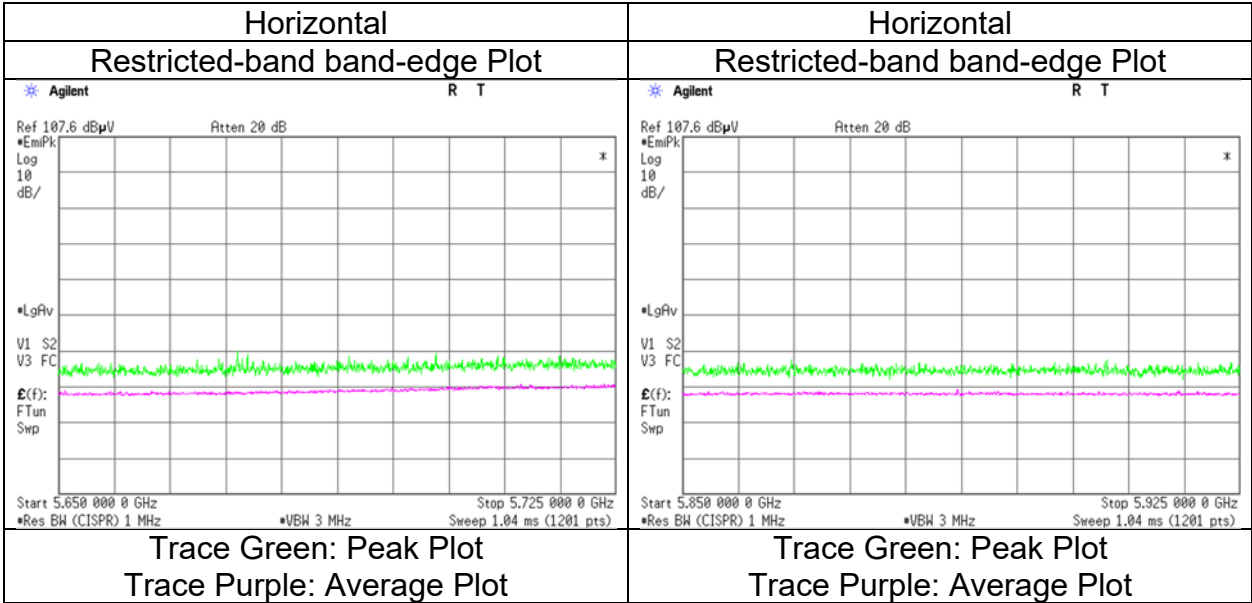

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission (Plot Data, Worst case mode for Maximum Conducted Output Power)

Test Place	Ise EMC Lab.			
Semi Anechoic Chamber	No.4	No.3	No.3	No.3
Date	February 22, 2024	February 25, 2024	March 5, 2024	March 5, 2024
Temperature / Humidity	20 deg. C / 52 % RH	22 deg. C / 39 %RH	20 deg. C / 40 % RH	20 deg. C / 41 % RH
Engineer	Yuichiro Yamazaki (1 GHz to 6 GHz)	Hiroyuki Furutaka (6 GHz to 10 GHz)	Takumi Nishida (10 GHz to 18 GHz)	Hiroyuki Furutaka (18 GHz to 26.5 GHz)
Semi Anechoic Chamber	No.3		No.3	
Date	March 7, 2024	March 8, 2024		
Temperature / Humidity	21 deg. C / 31 % RH	22 deg. C / 35 % RH		
Engineer	Hiroyuki Furutaka (26.5 GHz to 40 GHz)	Hiroyuki Furutaka (Below 1 GHz)		
Mode	Tx 11a 5180 MHz			

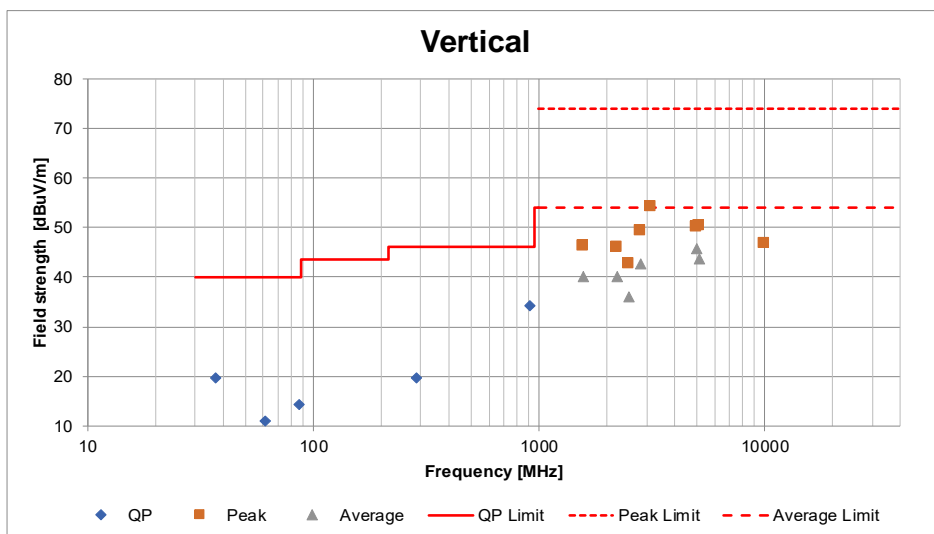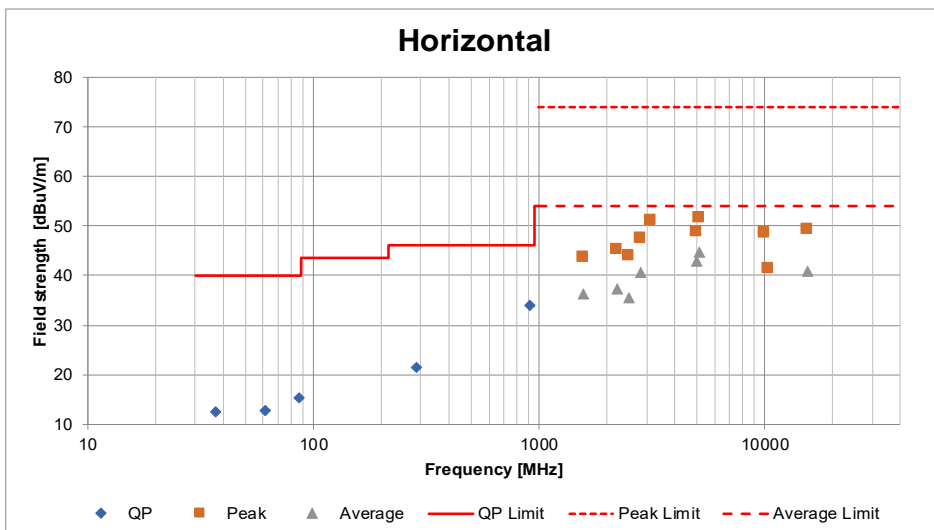

*These plots data contains sufficient number to show the trend of characteristic features for EUT.

APPENDIX 2: Test Instruments

Test Equipment

Test Item	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
RE	141227	Microwave Cable	Junkosha	MMX221-00500DMSDMS	1502S305	03/04/2024	12
RE	141232	High Pass Filter 3.5-18.0GHz	UL Japan	HPF SELECTOR	001	09/04/2023	12
RE	141266	Logperiodic Antenna (200-1000MHz)	Schwarzbeck Mess-Elektronik OHG	VUSLP9111B	9111B-191	08/10/2023	12
RE	141279	Microwave Cable	Junkosha	MMX221-00500DMSDMS	1502S303	03/04/2024	12
RE	141293	High Pass Filter 7-20GHz	TOKIMEC	TF37NCCB	602	02/15/2024	12
RE	141323	Coaxial cable	UL Japan	-	-	09/10/2023	12
RE	141503	Horn Antenna 18-26.5GHz	EMCO	3160-09	1265	06/23/2023	12
RE	141508	Horn Antenna 1-18GHz	Schwarzbeck Mess-Elektronik OHG	BBHA9120D	557	05/17/2023	12
RE	141517	Horn Antenna 26.5-40GHz	ETS-Lindgren	3160-10	152399	11/20/2023	12
RE	141532	DIGITAL HiTESTER	HIOKI E.E. CORPORATION	3805	051201197	01/31/2024	12
RE	141545	DIGITAL HiTESTER	HIOKI E.E. CORPORATION	3805	51201148	02/01/2024	12
RE	141554	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	1301	-	-
RE	141580	MicroWave System Amplifier	Keysight Technologies Inc	83017A	MY39500779	03/08/2024	12
RE	141581	MicroWave System Amplifier	Keysight Technologies Inc	83017A	00650	10/05/2023	12
RE	141582	Pre Amplifier	SONOMA INSTRUMENT	310	260834	02/17/2024	12
RE	141588	Pre Amplifier	L3 Narda-MITEQ	AMF-6F-2600400-33-8P / AMF-4F-2600400-33-8P	1871355 / 1871328	01/22/2024	12
RE	141884	Spectrum Analyzer	Keysight Technologies Inc	E4448A	MY44020357	03/13/2023	12
RE	141885	Spectrum Analyzer	Keysight Technologies Inc	E4448A	US44300523	11/29/2023	12
RE	141901	Spectrum Analyzer	Keysight Technologies Inc	E4440A	MY48250080	01/26/2024	12
RE	141950	EMI Test Receiver	Rohde & Schwarz	ESU26	100412	11/20/2023	12
RE	142008	AC3_Semi Anechoic Chamber (NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	12/11/2023	24
RE	142013	AC3_Semi Anechoic Chamber (SVSWR)	TDK	Semi Anechoic Chamber 3m	DA-10005	10/18/2023	12
RE	142017	AC4_Semi Anechoic Chamber (SVSWR)	TDK	Semi Anechoic Chamber 3m	DA-10005	10/11/2023	12
RE	142183	Measure	KOMELON	KMC-36	-	10/20/2023	12
RE	142230	Measure, Tape, Steel	KOMELON	KMC-36	-	-	-
RE	142314	Attenuator	Pasternack Enterprises	PE7390-6	D/C 1504	06/23/2023	12
RE	160324	Coaxial Cable	Huber+Suhner	SUCOFLEX 102A	MY009/2A	10/05/2023	12
RE	178648	EMI measurement program	TSJ (Techno Science Japan)	TEPTO-DV	-	-	-
RE	197990	Biconical Antenna	Schwarzbeck Mess-Elektronik OHG	VHBB 9124 + BBA 9106	01365	11/29/2023	12
RE	234602	Microwave Cable	Huber+Suhner	SF126E/11PC35/11PC35/1000M,5000M	537063/126E / 537074/126E	03/08/2024	12
RE	238713	Double Ridge Horn Antenna	Schwarzbeck Mess-Elektronik OHG	BBHA 9120 C	688	08/10/2023	12
RE	244710	Thermo-Hygrometer	HIOKI E.E. CORPORATION	LR5001	231202104	01/25/2024	12

*Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item:

RE: Radiated Emission