



**FCC CFR47 PART 90, SUBPART I
CERTIFICATION TEST REPORT**

FOR

36 – 42MHZ RF POWER AMPLIFIER

MODEL NUMBER: PA1-1AEM

FCC ID: BBD1-1AEM

REPORT NUMBER: 07U10913-1

ISSUE DATE: MARCH 28, 2007

Prepared for
TPL COMMUNICATION
3370 SAN FERNANDO ROAD, SUITE 206
LOS ANGELES, CA 90065, USA

Prepared by
COMPLIANCE CERTIFICATION SERVICES
47173 BENICIA STREET
FREMONT, CA 94538, USA
TEL: (510) 771-1000
FAX: (510) 661-0888

NVLAP®

NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
---	03/28/07	Initial Issue	T. Chan

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY.....	5
4.1. <i>MEASURING INSTRUMENT CALIBRATION.....</i>	5
4.2. <i>MEASUREMENT UNCERTAINTY.....</i>	5
5. EQUIPMENT UNDER TEST.....	6
5.1. <i>DESCRIPTION OF EUT</i>	6
5.2. <i>MAXIMUM OUTPUT POWER</i>	6
5.3. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	6
5.4. <i>DESCRIPTION OF TEST SETUP</i>	7
6. TEST AND MEASUREMENT EQUIPMENT	9
7. LIMITS AND RESULTS	10
7.1. <i>OCCUPIED BANDWIDTH</i>	10
7.2. <i>FM EMISSION LIMITATION.....</i>	17
7.3. <i>MODULATION CHARACTERISTICS.....</i>	24
7.4. <i>RF POWER OUTPUT.....</i>	24
7.5. <i>VOLTAGE STABILITY.....</i>	28
7.6. <i>SPURIOUS EMISSION AT ANTENNA TERMINAL.....</i>	29
7.7. <i>FIELD STRENGTH OF SPURIOUS RADIATION.....</i>	33
7.7.1. <i>30MHz TO 1000MHz SPURIOUS RADIATION</i>	34
8. SETUP PHOTOS	35

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: TPL COMMUNICATION
3370 SAN FERNANDO ROAD, SUITE 206
LOS ANGELES, CA 90065 USA

EUT DESCRIPTION: 36 – 42MHZ RF POWER AMPLIFIER

MODEL: PA1-1AEM

SERIAL NUMBER: 1889

DATE TESTED: MARCH 17-21, 2007

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 90 SUBPART I	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:



THU CHAN
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES

Tested By:



CHIN PANG
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA/EIA 603C (2004), FCC CFR 47 Part 2, and FCC CFR 47 Part 90.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a RF Power Amplifier, the operation frequency range is: 36-42MHz, 110 Watt. The radio module is manufactured by TPL Communications.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

Frequency Range (MHz)	Modulation	Conducted Output Power (dBm)	Conducted Output Power (W)
36-42	CW	50.38	109.1

5.3. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined as the channel with the highest output power. The highest measured output power was at 36MHz mid channel.

5.4. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
500 Watt 50 Ohm Terminator	Bird Electronic Corp	8201	13288	NA
Signal Generator, 1024 MHz	R & S	SMY01	839957/011	12/12/07
DC Power Supply	Innovative Circuit Technology	ICT22012-30A/TP	30A532186	NA
Power Amplifier	Amplifier Research	75A250	303332	NA
Directional Coupler 500W 40dB	Werlatone	C6021	8576	CNR


I/O CABLES

I/O CABLE LIST						
Cable	Port	# of	Connector	Cable	Cable	Remarks
No.		Identical	Type	Type	Length	
		Ports				
1	AC	2	US 115V	Un-shielded	2m	N/A
2	DC	1	DC	Un-shielded	2m	N/A
3 to 7	RF In/Out	5	N-Type Connector	Shielded	1m	N/A

TEST SETUP

The EUT is a stand-alone device. The input was given by signal generator as the source modulations of CW and FM during the tests.

SETUP DIAGRAM FOR TESTS

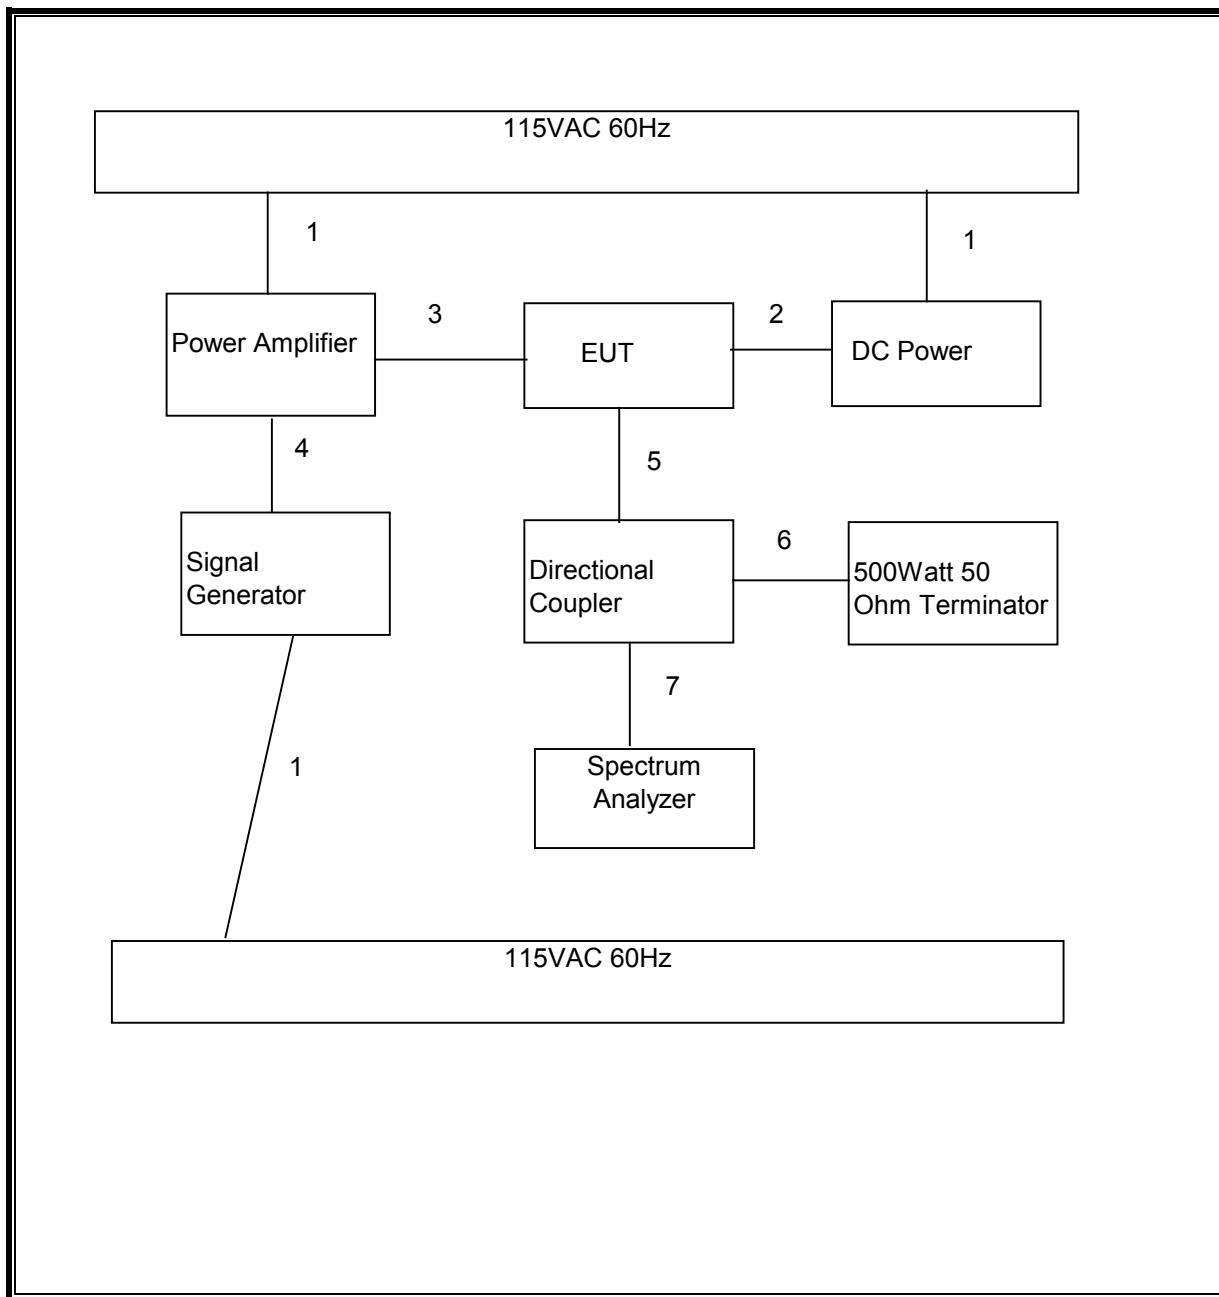

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
Signal Generator, 1024 MHz	R & S	SMY01	839957/011	12/12/2007
Spectrum Analyzer 3 Hz ~ 44 GHz	Agilent / HP	E4446A	US42070220	7/29/2007
Antenna, Horn 1 ~ 18 GHz	ETS	3117	29310	4/22/2007
Antenna, Bilog 30 MHz ~ 2 Ghz	Sunol Sciences	JB1	A0022704	9/3/2007
Preamplifier, 1300 MHz	Agilent / HP	8447D	1937A02062	1/23/2008
SA RF Section, 1.5 GHz	Agilent / HP	85680B	2814A04227	1/7/2008
Quasi-Peak Adaptor	Agilent / HP	85650A	3145A01654	1/21/2008
SA Display Section 2	Agilent / HP	85662A	2816A16696	4/7/2008

7. LIMITS AND RESULTS

7.1. OCCUPIED BANDWIDTH

LIMIT

None: for reporting purposes only.

TEST PROCEDURE

Measurements were made with the modulating signal at 2.5 KHz with 5 KHz of FM deviation. The transmitter output is connected to a spectrum analyzer. The RBW is set to 1% to 3% of the 26 dB bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled.

RESULTS

No non-compliance noted:


FM Modulation - Input


Channel	Frequency (MHz)	99% BW (KHz)	26dBc BW (KHz)
Low	36	15.171	20.180
Middle	39	15.172	20.182
High	42	15.172	20.181


FM Modulation - Output

Channel	Frequency (MHz)	99% BW (KHz)	26dBc BW (KHz)
Low	36	15.170	20.181
Middle	39	15.171	20.183
High	42	15.173	20.183


FM 26 dB BANDWIDTH - INPUT

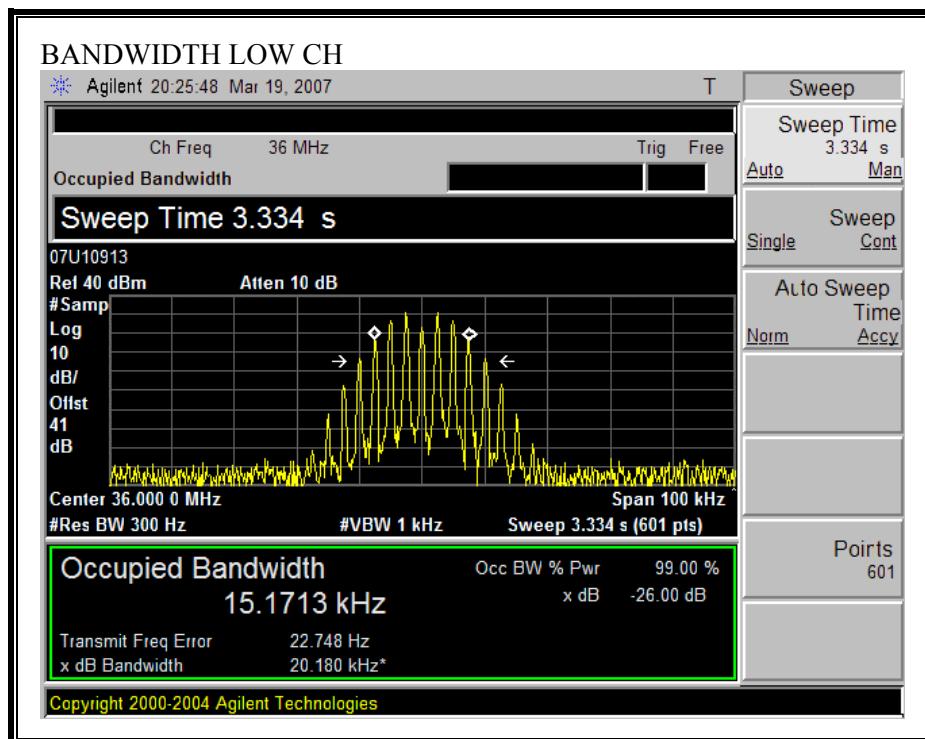


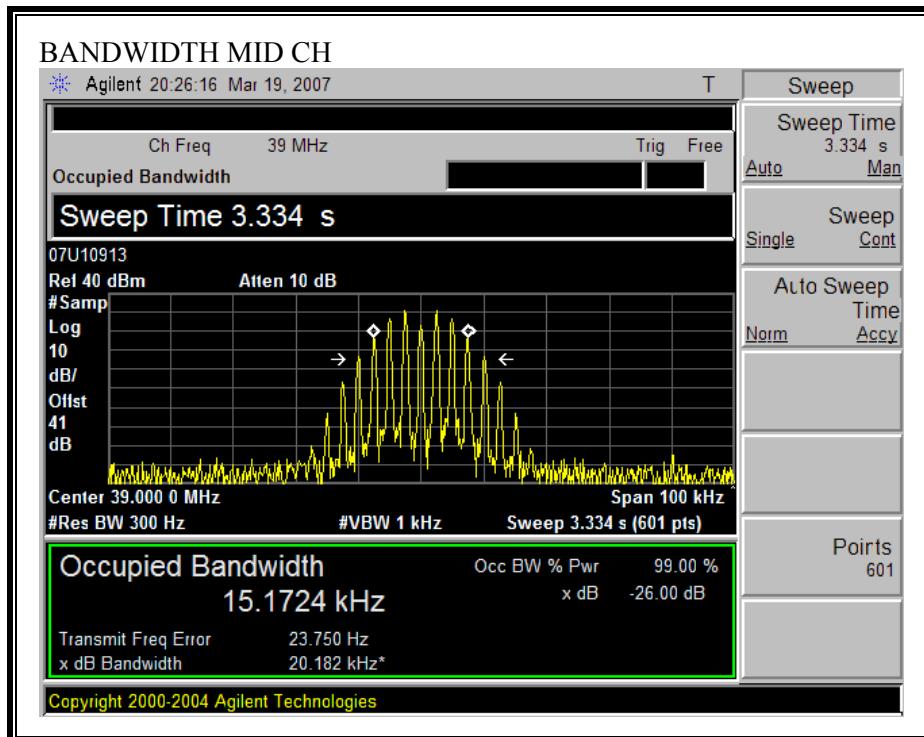


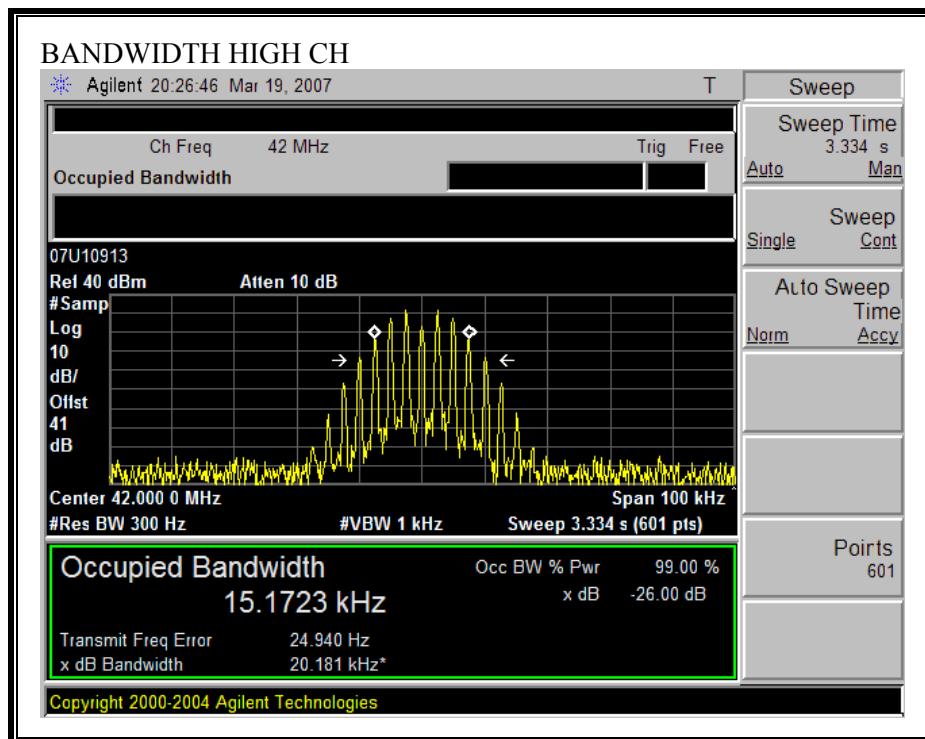

FM 26 dB BANDWIDTH -OUTPUT

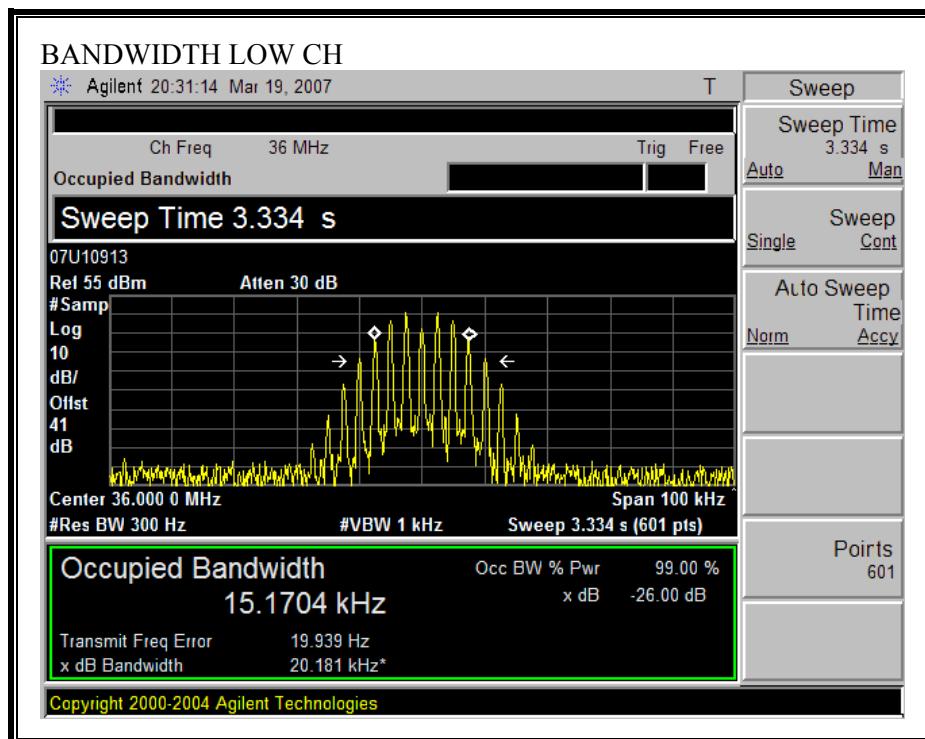

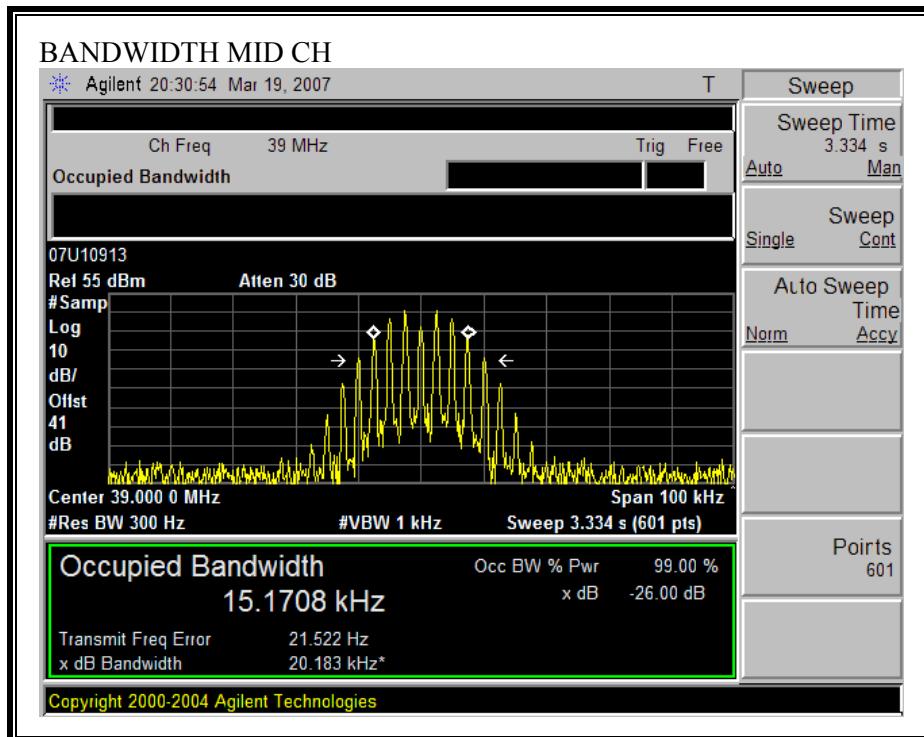

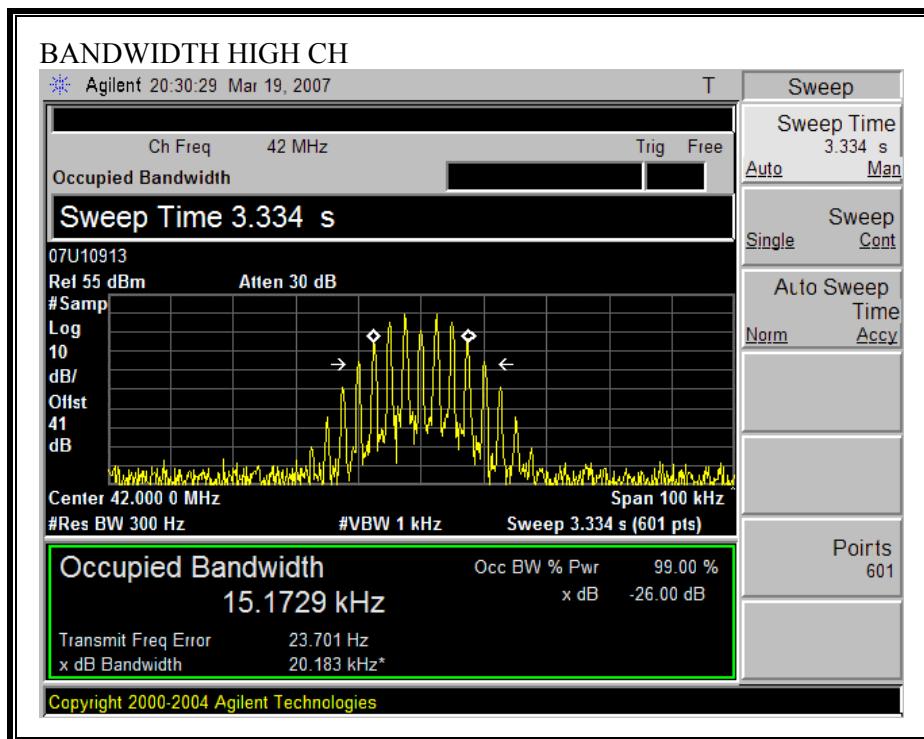

7.2. FM EMISSION LIMITATION

LIMIT

§90.210(c):

For transmitters that are not equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

- (1) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 5 kHz, but no more than 10 kHz: At least $83 \log (fd/5)$ dB;
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 10 kHz, but not more than 250 percent of the authorized bandwidth: At least $29 \log (fd 2/11)$ dB or 50 dB, whichever is the lesser attenuation;
- (3) On any frequency removed from the center of the authorized bandwidth by more than 250 percent of the authorized bandwidth: At least $43 + 10 \log (P)$ dB.


TEST PROCEDURE


ANSI / TIA / EIA 603 Clause 3.2.11


RESULTS

No non-compliance noted:


Un-modulated Signal:

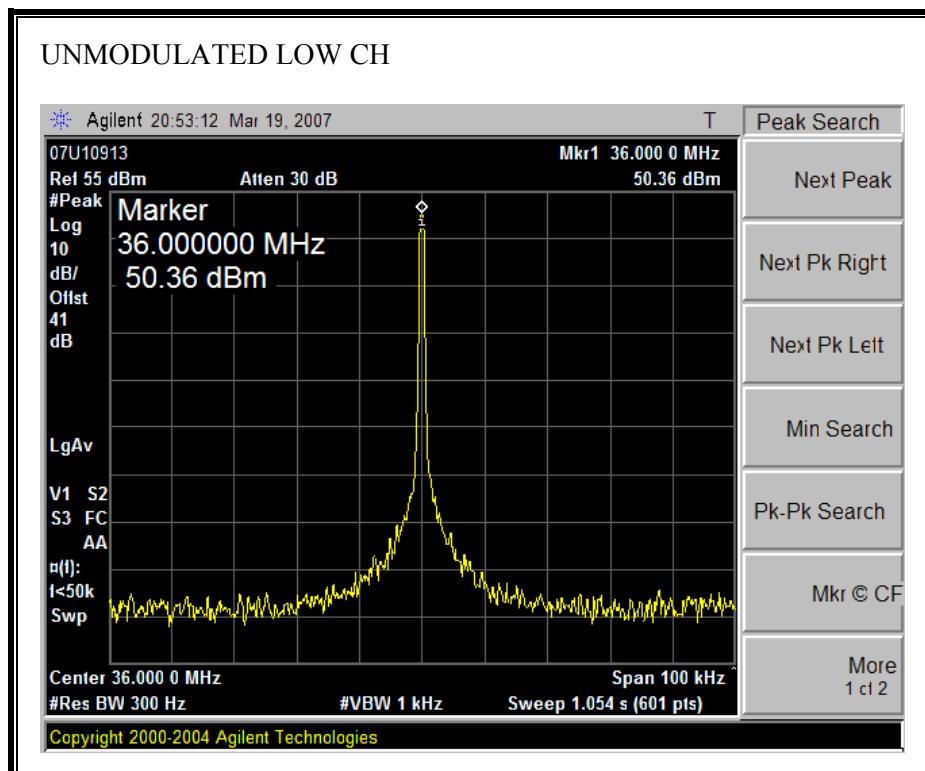


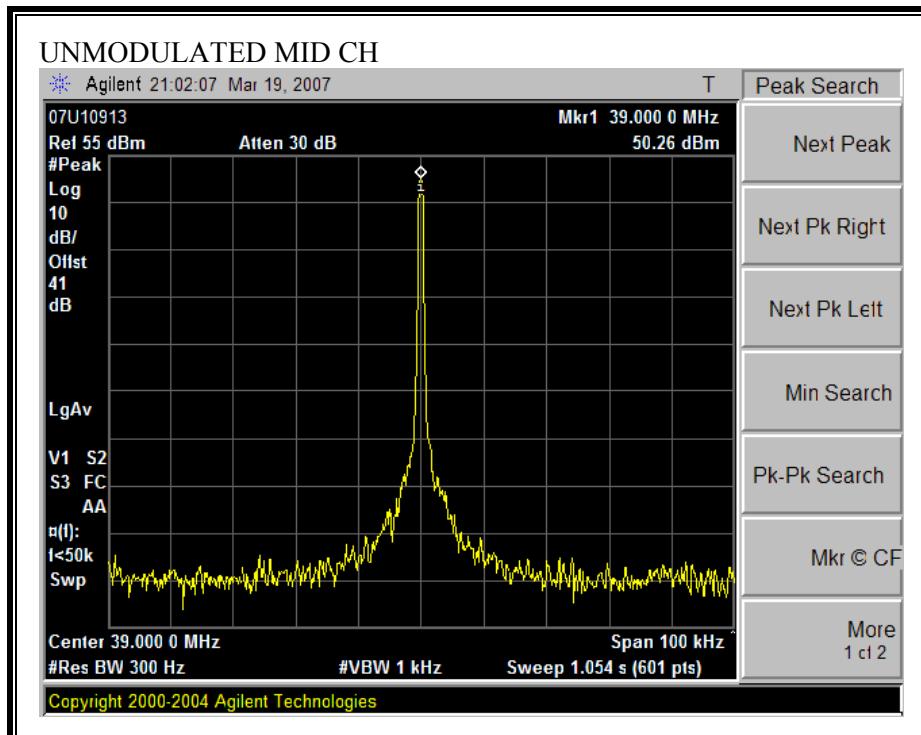


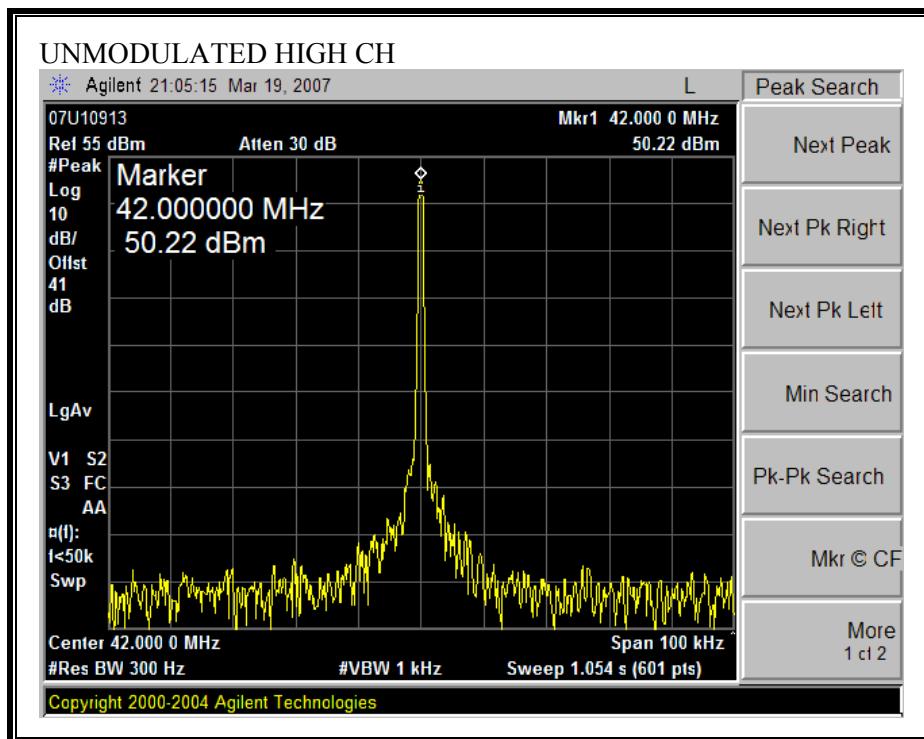

FM EMISSIONS MASK

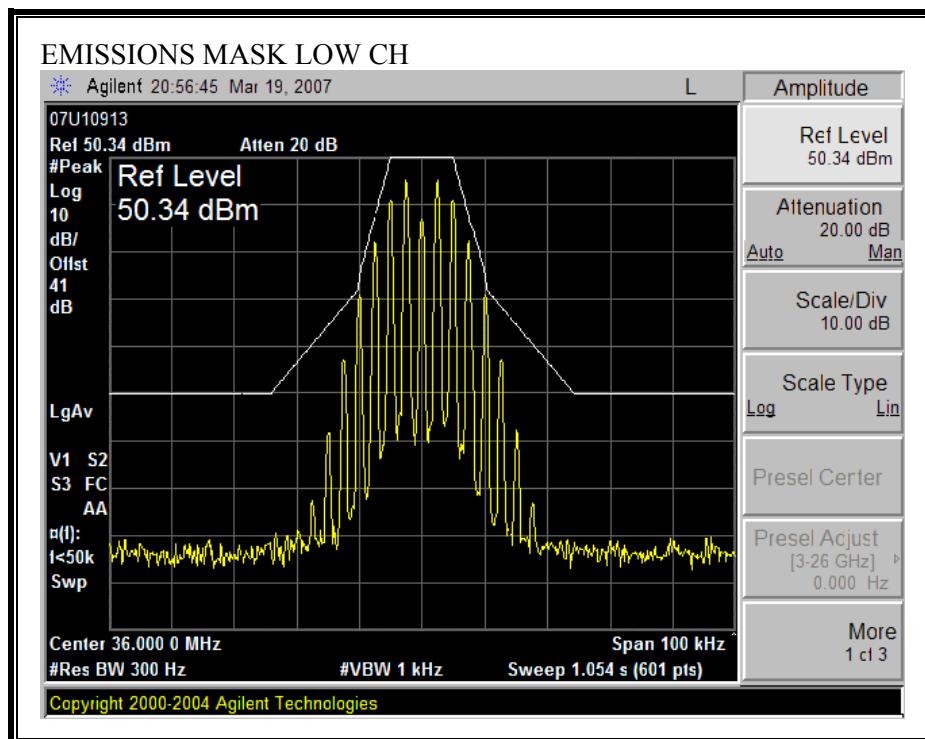

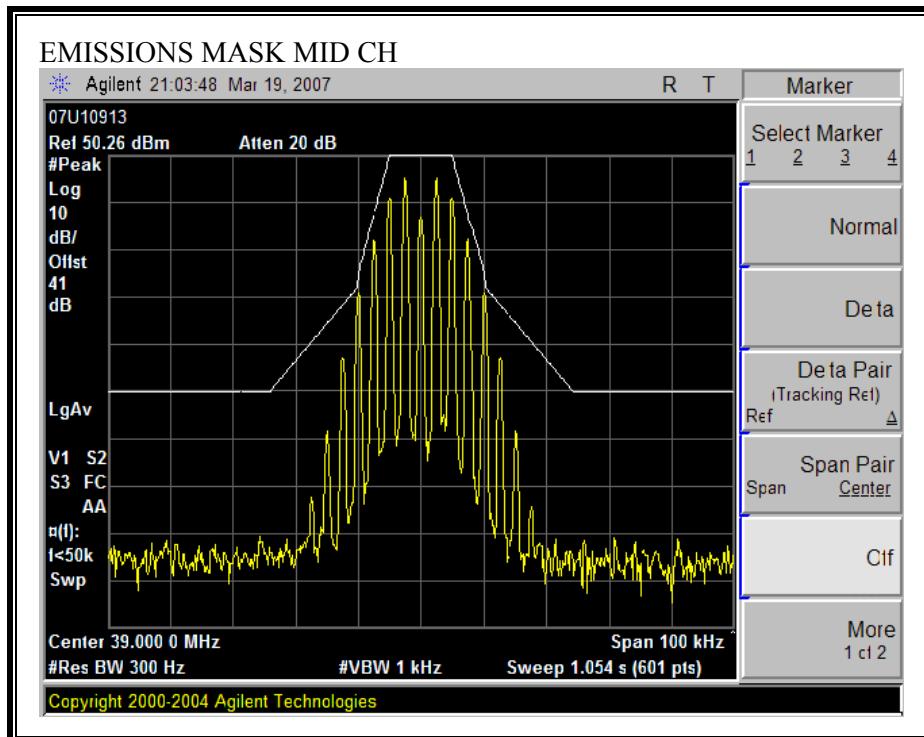

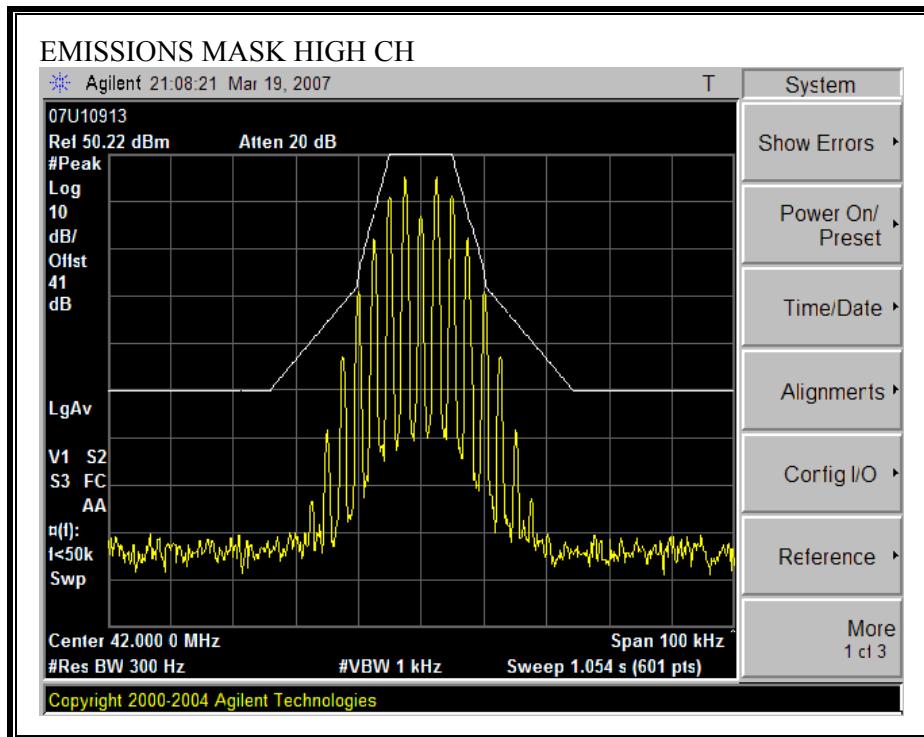

7.3. MODULATION CHARACTERISTICS

Not Applicable. Due to this EUT is a power amplifier and has no Mix circuitry to modulate the RF signal.

7.4. RF POWER OUTPUT

LIMIT

FCC part 90: The Maximum ERP transmitter power will be considered and authorized on a case-by-case basis. Please refer to the limitations on power and antenna heights are specified in §90.205, §90.279, and §90.309.

ST PROCEDURE

ANSI / TIA / EIA 603 Clause 3.2.1

RESULTS


No non-compliance noted.


Conducted Output Power


CW Output Power

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	36	50.38	109.14
Mid	39	50.37	108.89
High	42	50.34	108.14

Conducted Output Power

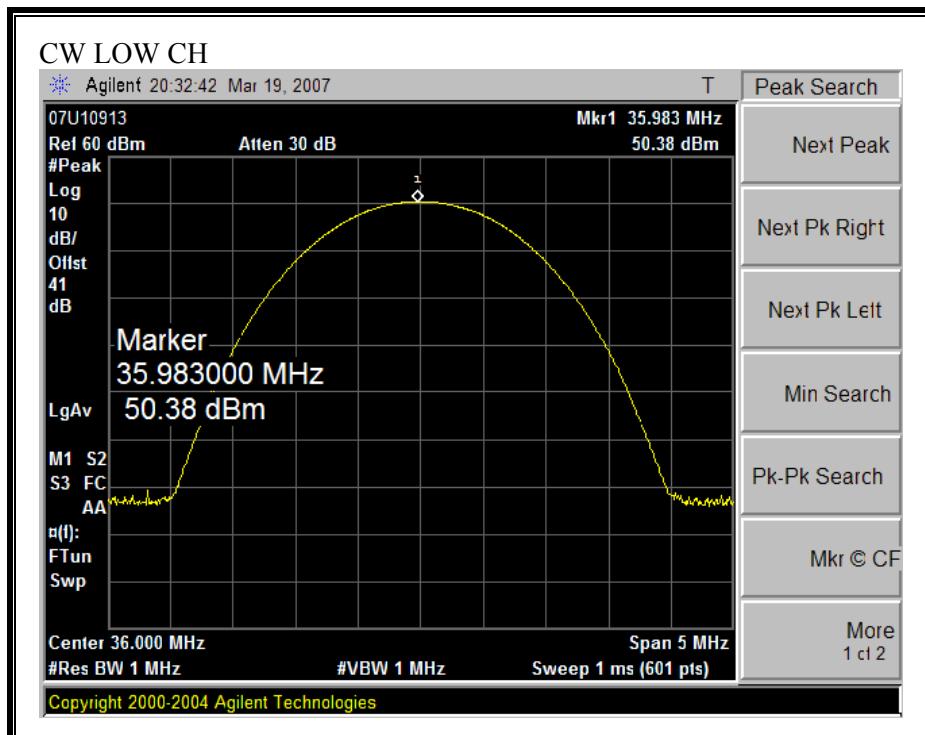

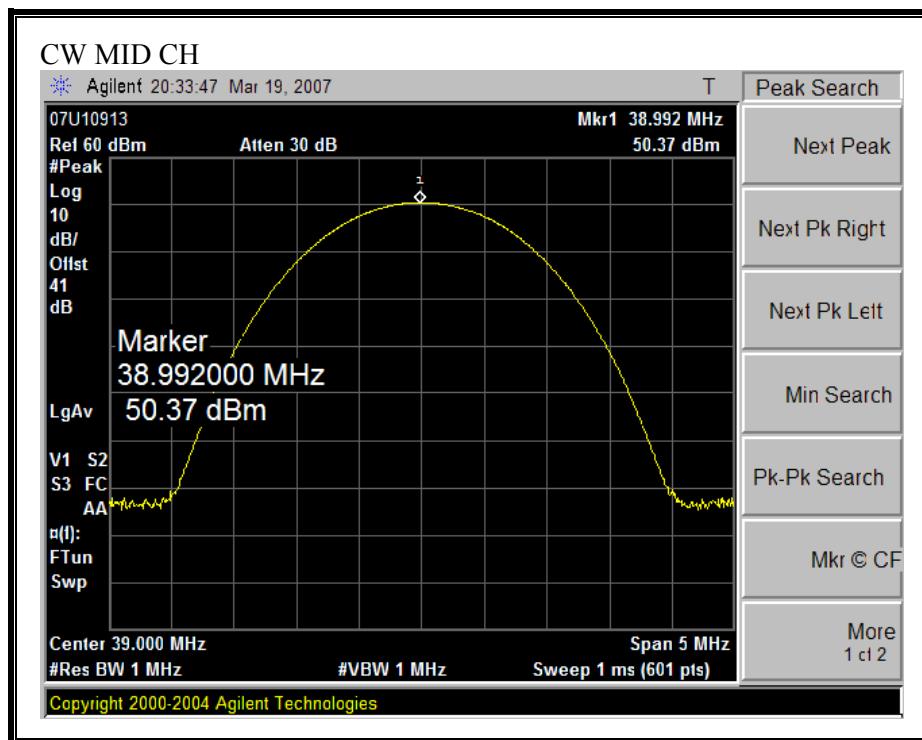

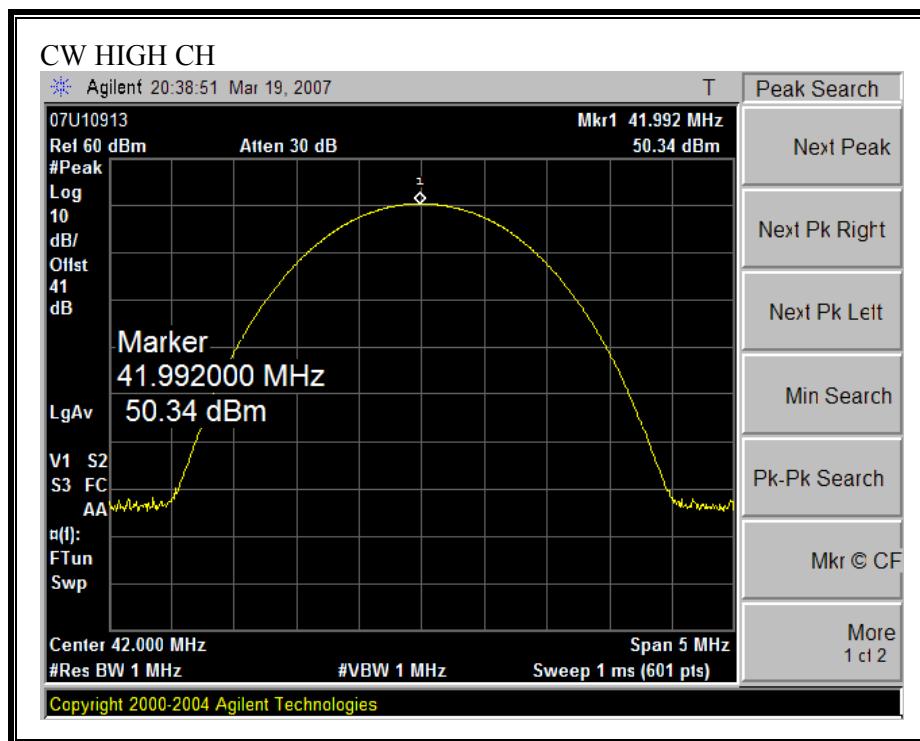

7.5. VOLTAGE STABILITY

LIMIT

FCC part 90: The Maximum ERP transmitter power will be considered and authorized on a case-by-case basis. Please refer to the limitations on power and antenna heights are specified in §90.205, §90.279, and §90.309.

TEST PROCEDURE

ANSI / TIA / EIA 603 Clause 3.2.1

Conducted Output Power vs Voltage

CW Output Power vs Voltage

Channel Frequency (MHz)	Output Power at DC Normal Voltage		Output Power at 85% Voltage		Output Power at 115% Voltage	
	dBm	Watt	dBm	Watt	dBm	Watt
36	50.38	109.14	49.61	91.41	50.71	117.76
39	50.37	108.89	49.58	90.78	50.41	109.90
42	50.34	108.14	49.77	94.84	50.51	112.46

7.6. SPURIOUS EMISSION AT ANTENNA TERMINAL

LIMIT

§90.210 Out of band emissions, The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB


TEST PROCEDURE

ANSI / TIA / EIA 603 Clause 3.2.13, & FCC 90.210


RESULTS

No non-compliance noted.


Low Channel, 10MHz to 1000MHz

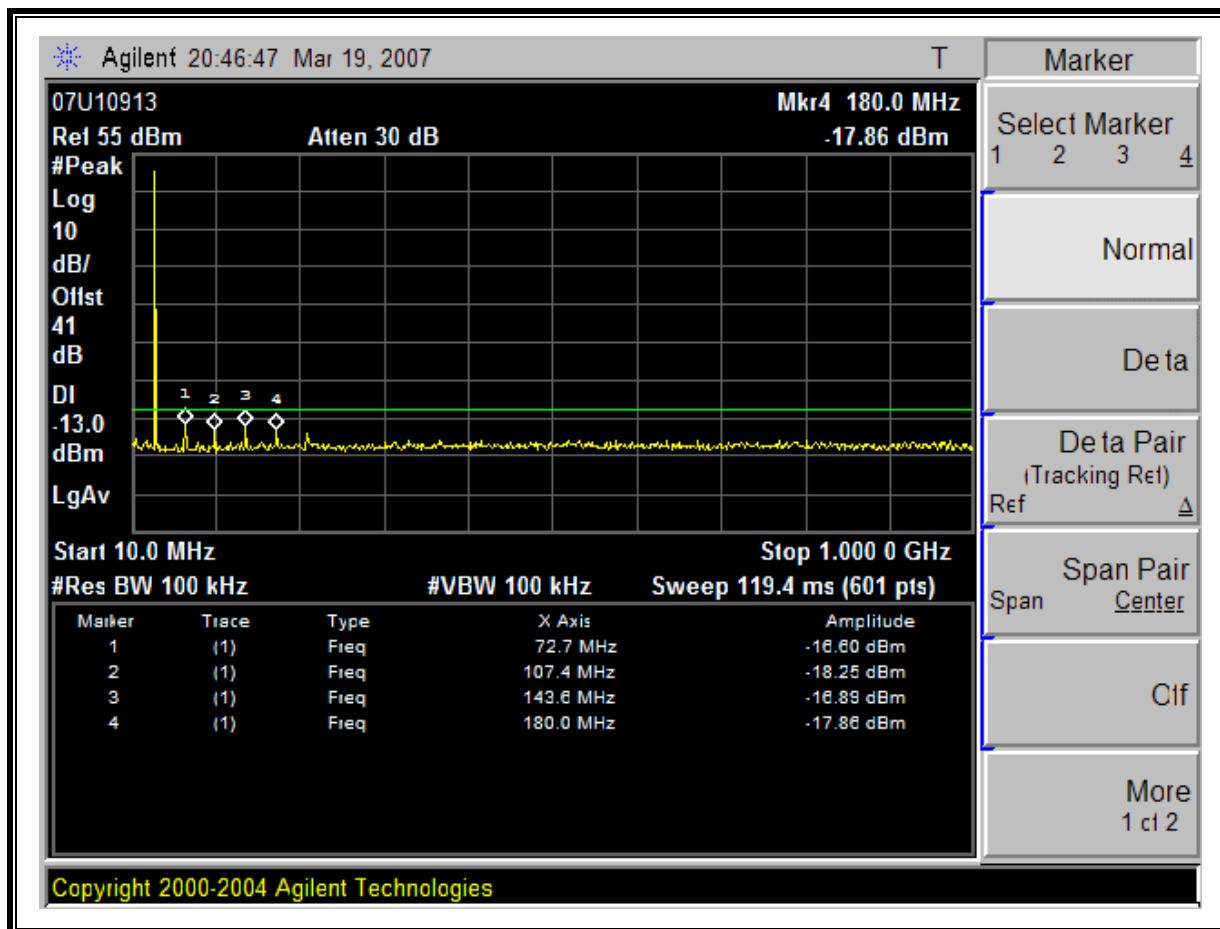

Mid Channel, 10MHz to 1000MHz

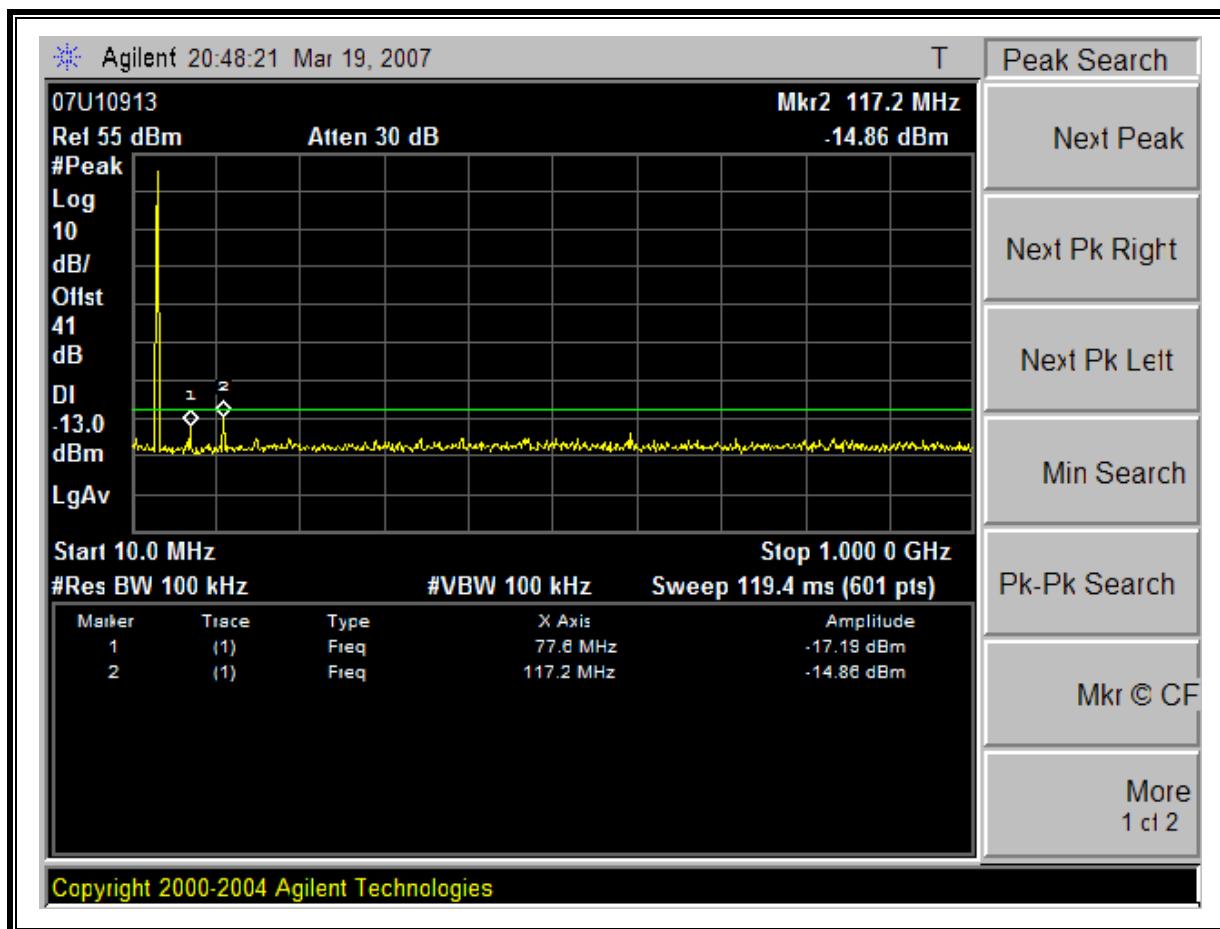

High Channel, 10MHz to 1000MHz

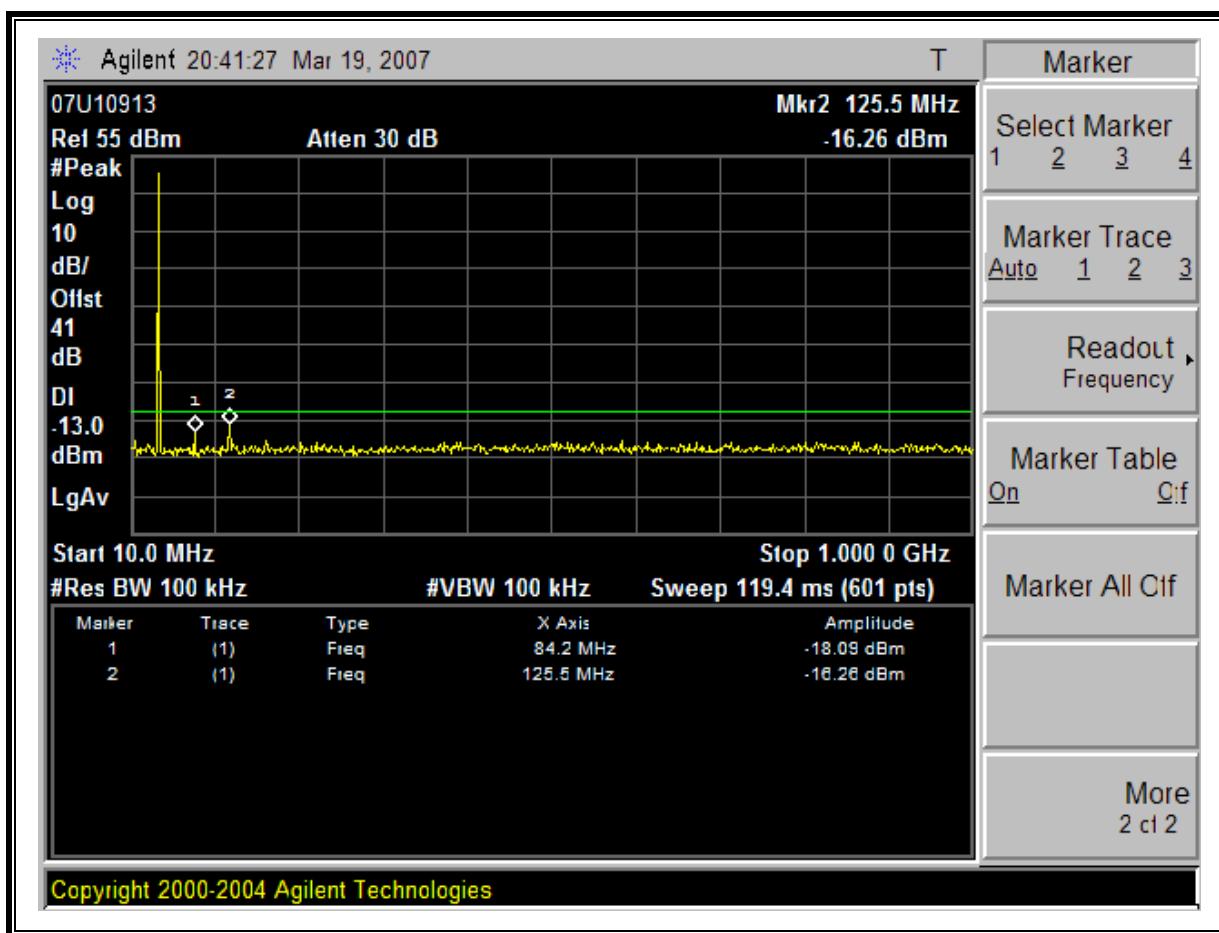

7.7. FIELD STRENGTH OF SPURIOUS RADIATION

LIMIT

§90.210 Out of band emissions, The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

ANSI / TIA / EIA 603 Clause 3.2.13, & FCC 90.210

RESULTS

No non-compliance noted.

7.7.1. 30MHz TO 1000MHz SPURIOUS RADIATION


Spurious & Harmonic (ERP)

30 - 1000MHz Substitution Measurement Compliance Certification Services, Fremont 5m A-Chamber										
Company:TPL Communications Project #:07U10913 Date:3/16/2007 Test Engineer:Chin Pang Configuration:EUT/Support Equipment Mode:TX (36-42MHz)			Test Equipment:							
	Bilog Antenna	Cable	Pre-amplifier 8447D	Limit						
	5m Chamber Sunol Biolog	5m Chamber Cable	T5 8447D	ERP						
f MHz	SA reading (dBuV/m)	Ant. Pol. (H/V)	SG reading (dBm)	CL (dB)	Gain (dBi)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
w Ch, 36MHz										
72.90	89.0	V	-23.3	1.2	-1.4	-3.6	-28.1	-13.0	-15.1	
109.10	85.0	V	-23.7	1.4	-1.7	-3.9	-28.9	-13.0	-15.9	
145.20	76.0	V	-32.7	1.5	-0.2	-2.4	-36.7	-13.0	-23.7	
181.30	75.0	V	-34.4	1.7	3.1	1.0	-35.1	-13.0	-22.1	
238.00	72.0	V	-37.5	1.9	6.0	3.8	-35.6	-13.0	-22.6	
118.00	81.0	H	-26.2	1.4	-2.5	-4.7	-32.2	-13.0	-19.2	
157.00	73.0	H	-35.8	1.6	1.0	-1.1	-38.6	-13.0	-25.6	
196.20	70.0	H	-39.6	1.7	4.1	1.9	-39.4	-13.0	-26.4	
238.00	71.7	H	-37.9	1.9	6.0	3.8	-36.0	-13.0	-23.0	
316.00	72.5	H	-33.5	2.1	6.0	3.9	-31.8	-13.0	-18.8	
822.00	71.6	H	-27.1	3.4	6.7	4.6	-25.9	-13.0	-12.9	
Mid ch, 39MHz										
78.90	88.0	V	-24.4	1.2	-0.7	-2.8	-28.4	-13.0	-15.4	
118.00	86.0	V	-21.2	1.4	-2.5	-4.7	-27.2	-13.0	-14.2	
145.20	76.0	V	-32.7	1.5	-0.2	-2.4	-36.7	-13.0	-23.7	
181.30	75.0	V	-34.4	1.7	3.1	1.0	-35.1	-13.0	-22.1	
276.00	70.8	V	-37.6	2.0	6.0	3.9	-35.7	-13.0	-22.7	
822.00	67.4	V	-30.8	3.4	6.7	4.6	-29.7	-13.0	-16.7	
78.90	85.5	H	-29.6	1.2	-0.7	-2.8	-33.6	-13.0	-20.6	
118.00	80.3	H	-26.9	1.4	-2.5	-4.7	-32.9	-13.0	-19.9	
157.00	70.0	H	-38.8	1.6	1.0	-1.1	-41.6	-13.0	-28.6	
196.20	76.0	H	-33.6	1.7	4.1	1.9	-33.4	-13.0	-20.4	
276.00	67.4	H	-40.5	2.0	6.0	3.9	-38.6	-13.0	-25.6	
822.00	72.7	H	-26.0	3.4	6.7	4.6	-24.8	-13.0	-11.8	
High Ch, 42MHz										
84.00	97.0	V	-14.3	1.2	-0.4	-2.6	-18.1	-13.0	-5.1	
126.90	87.0	V	-20.4	1.4	-2.2	-4.3	-26.2	-13.0	-13.2	
169.00	78.0	V	-31.9	1.6	2.1	-0.1	-33.6	-13.0	-20.6	
214.00	72.4	V	-37.9	1.9	5.8	3.6	-36.2	-13.0	-23.2	
800.00	74.6	V	-23.9	3.4	6.7	4.5	-22.7	-13.0	-9.7	
842.00	72.6	V	-25.3	3.5	6.7	4.6	-24.2	-13.0	-11.2	
84.00	85.8	H	-28.5	1.2	-0.4	-2.6	-32.3	-13.0	-19.3	
126.90	81.0	H	-26.4	1.4	-2.2	-4.3	-32.2	-13.0	-19.2	
169.00	67.0	H	-42.1	1.6	2.1	-0.1	-43.8	-13.0	-30.8	
212.00	74.0	H	-36.4	1.9	5.8	3.6	-34.7	-13.0	-21.7	
800.00	70.0	H	-28.9	3.4	6.7	4.5	-27.8	-13.0	-14.8	
842.00	70.6	H	-27.8	3.5	6.7	4.6	-26.7	-13.0	-13.7	

Rev. 3.13.7
 Note: No other emissions were detected above the system noise floor up to 1Ghz.

8. SETUP PHOTOS

ANTENNA PORT CONDUCTED RF MEASUREMENT SETUP

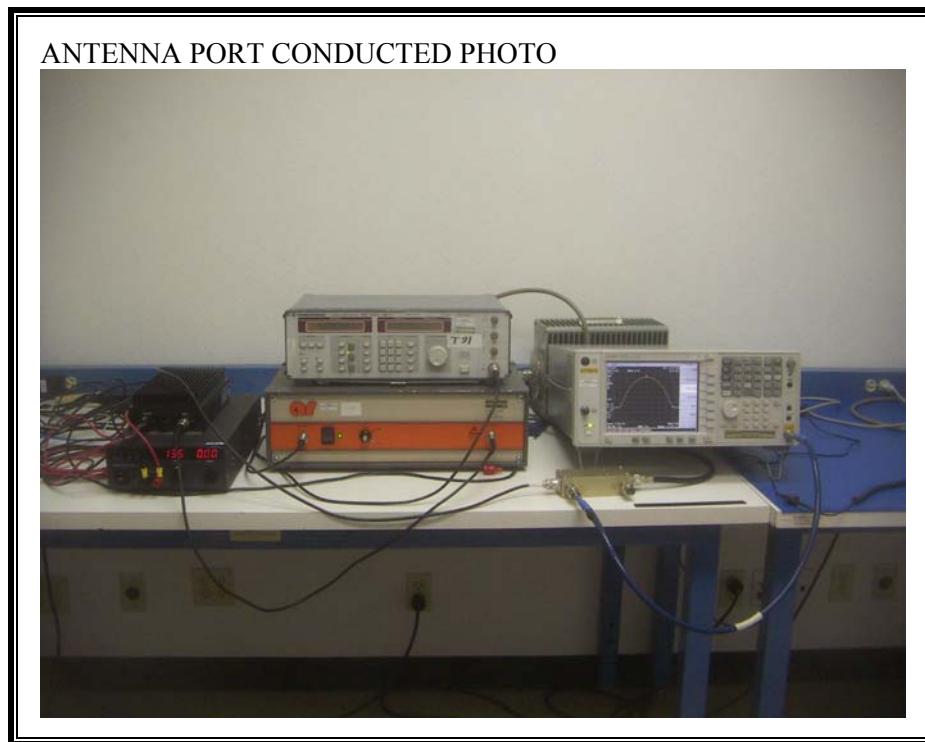

RADIATED RF MEASUREMENT SETUP

RADIATED FRONT PHOTO





END OF REPORT