



**FCC CFR47 PART 22, SUBPART E  
AND  
FCC CFR47 PART 90, SUBPART I  
CLASS II PERMISSIVE CHANGE CERTIFICATION TEST REPORT**

**FOR**

**RF POWER AMPLIFIER**

**MODEL NUMBER: PA2-2AB-RSPS-P1**

**FCC ID: BBD2-2AB**

**REPORT NUMBER: 06U10123-1**

**ISSUE DATE: MARCH 14, 206**

*Prepared for*  
**TPL COMMUNICATION  
3370 SAN FERNANDO ROAD, SUITE 206  
LOS ANGELES, CA 90065, USA**

*Prepared by*  
**COMPLIANCE CERTIFICATION SERVICES  
561F MONTEREY ROAD  
MORGAN HILL, CA 95037, USA  
TEL: (408) 463-0885  
FAX: (408) 463-0888**

**NVLAP®**  
LAB CODE:200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
A	3/14/06	Initial Issue	Thu

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS.....</b>	<b>4</b>
<b>2. TEST METHODOLOGY .....</b>	<b>5</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>5</b>
<b>4. CALIBRATION AND UNCERTAINTY.....</b>	<b>5</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION.....</i>	<i>5</i>
4.2. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>5</i>
<b>5. EQUIPMENT UNDER TEST.....</b>	<b>6</b>
5.1. <i>DESCRIPTION OF EUT .....</i>	<i>6</i>
5.2. <i>DESCRIPTION OF CLASS II CHANGE.....</i>	<i>6</i>
5.3. <i>MAXIMUM OUTPUT POWER .....</i>	<i>6</i>
5.4. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	<i>6</i>
5.5. <i>DESCRIPTION OF TEST SETUP .....</i>	<i>7</i>
<b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>9</b>
<b>7. LIMITS AND RESULTS .....</b>	<b>10</b>
7.1. <i>OCCUPIED BANDWIDTH .....</i>	<i>10</i>
7.2. <i>FM EMISSION LIMITATION.....</i>	<i>15</i>
7.3. <i>MODULATION CHARACTERISTICS.....</i>	<i>20</i>
7.4. <i>RF POWER OUTPUT.....</i>	<i>20</i>
7.5. <i>VOLTAGE STABILITY.....</i>	<i>23</i>
7.6. <i>FREQUENCY STABILITY.....</i>	<i>24</i>
7.7. <i>SPURIOUS EMISSION AT ANTENNA TERMINAL.....</i>	<i>24</i>
7.8. <i>FIELD STRENGTH OF SPURIOUS RADIATION.....</i>	<i>27</i>
7.8.1. <i>SPURIOUS RADIATION .....</i>	<i>28</i>
<b>8. SETUP PHOTOS .....</b>	<b>29</b>

## 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** TPL COMMUNICATION  
3370 SAN FERNANDO ROAD, SUITE 206  
LOS ANGELES, CA 90065 USA

**EUT DESCRIPTION:** RF POWER AMPLIFIER

**MODEL:** PA2-2AB-RSPS-P1

**SERIAL NUMBER:** 01683

**DATE TESTED:** MARCH 02-03, 2006

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 22 SUBPART E	NO NON-COMPLIANCE NOTED
FCC PART 90 SUBPART I	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:



---

THU CHAN  
EMC SUPERVISOR  
COMPLIANCE CERTIFICATION SERVICES

Tested By:



---

CHIN PANG  
EMC ENGINEER  
COMPLIANCE CERTIFICATION SERVICES

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA/EIA 603C (2004), FCC CFR 47 Part 2, FCC CFR 47 Part 22, and FCC CFR 47 Part 90.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a RF Power Amplifier, the operation frequency range is: 72-76MHz, 10Watts. The radio module is manufactured by TPL Communications.

### 5.2. DESCRIPTION OF CLASS II CHANGE

The change made to the EUT is removal of Control Circuit Board

### 5.3. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

Frequency Range (MHz)	Modulation	Conducted Output Power (dBm)	Conducted Output Power (W)
72-76	CW	40	10.0

### 5.4. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined as the channel with the highest output power.

## 5.5. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
Amplifier	AR	75A250	303332	CNR
Signal Generator, 1024 MHz	R & S	SMY01	839957/011	12/12/07
Directional Coupler, 500W, 40 dB, 10 ~ 1000 MHz	Werlatone	C6021	8576	CNR
50 Ohm Load, 500 W, 2.5 GHz	Bird	8201	13288	CNR


### I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	4	US 115V	Un-shielded	2m	N/A
2 -- 6	Input / Output	5	N-Connector	Shielded	1m	N/A

### TEST SETUP

The EUT is a stand-alone device. The input was given by signal generator as the source modulations of CW and FM during the tests.

**SETUP DIAGRAM FOR TESTS**

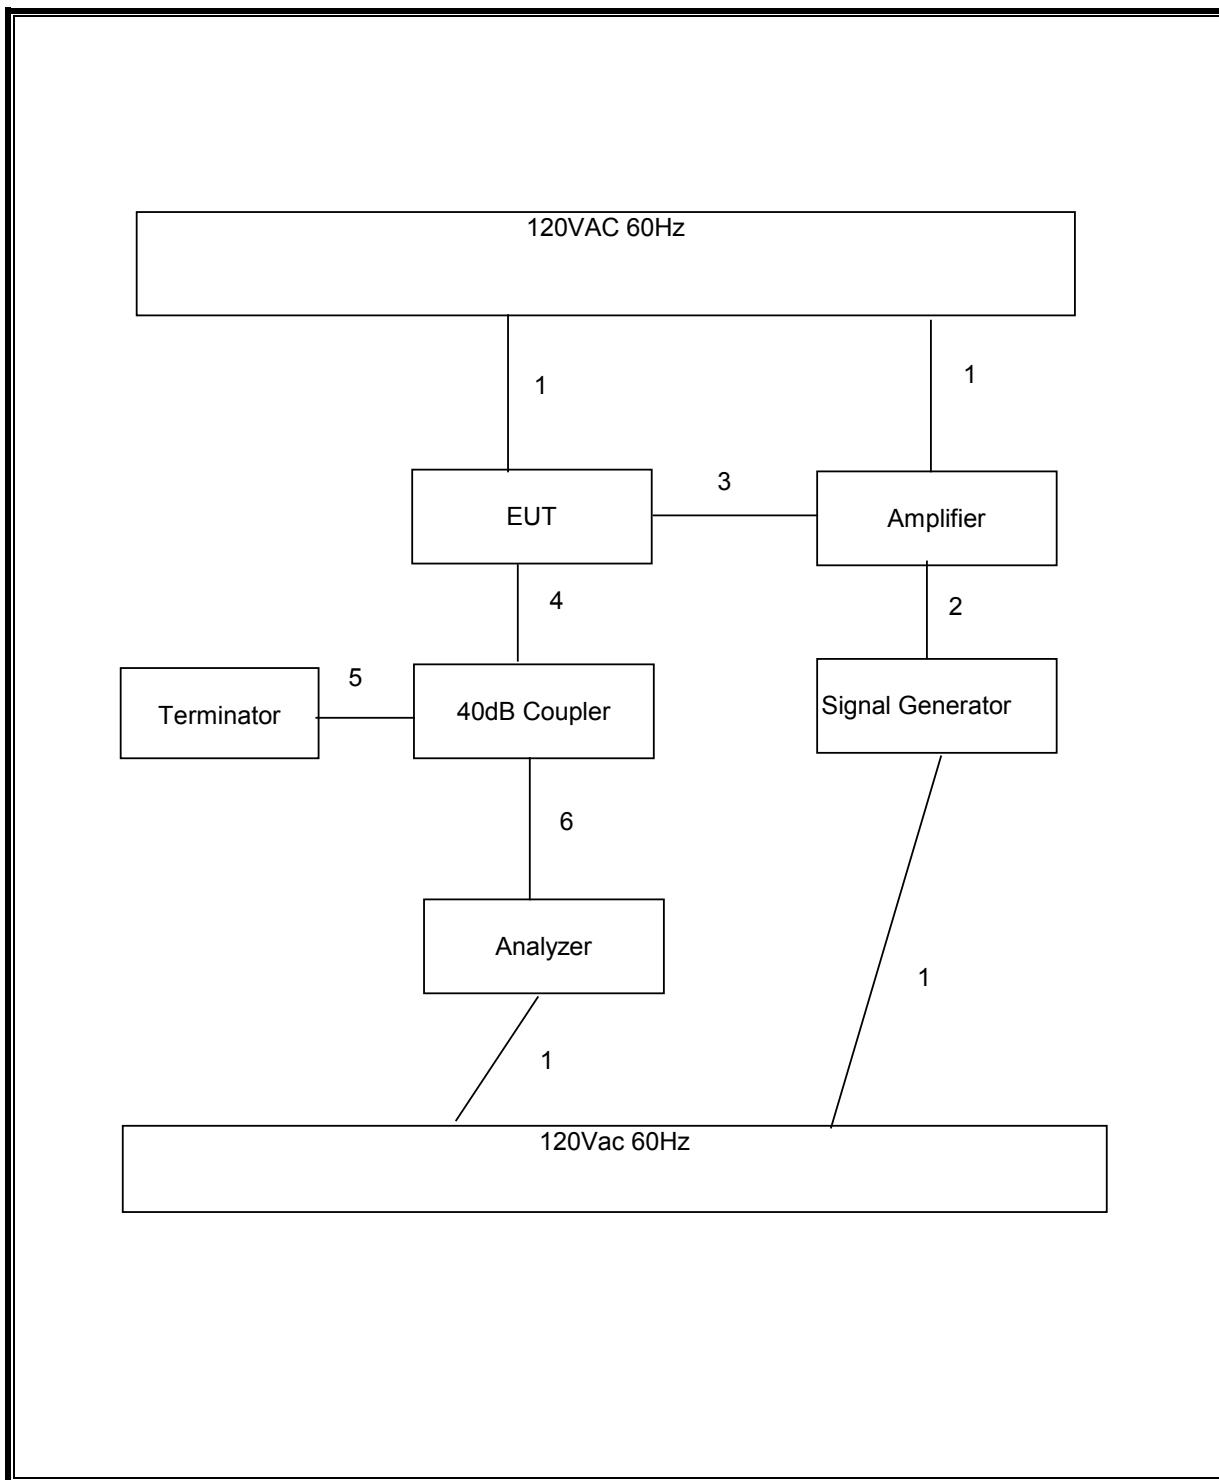

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
EMI Receiver, 9 kHz ~ 2.9 GHz	HP	8542E	3942A00286	2/4/2007
RF Filter Section	HP	85420E	3705A00256	2/4/2007
Preamplifier, 1300 MHz	HP	8447D	1937A02062	1/23/2007
Antenna, Bilog 30 MHz ~ 2 Ghz	Sunol Sciences	JB1	A121003	9/3/2006
Spectrum Analyzer 3 Hz ~ 44 GHz	Agilent	E4446A	US42510266	10/19/2006
Signal Generator, 1024 MHz	R & S	SMY01	839957/011	12/12/2007

## 7. LIMITS AND RESULTS

### 7.1. OCCUPIED BANDWIDTH

#### LIMIT

None: for reporting purposes only.

#### TEST PROCEDURE

Measurements were made with the modulating signal at 2.5 KHz with 5 KHz of FM deviation. The transmitter output is connected to a spectrum analyzer. The RBW is set to 1% to 3% of the 26 dB bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled.

#### RESULTS

No non-compliance noted:


##### FM Modulation - Input


Channel	Frequency (MHz)	Bandwidth (kHz)
Low	72	20.188
High	76	20.192

##### FM Modulation - Output


Channel	Frequency (MHz)	Bandwidth (kHz)
Low	72	20.184
High	76	20.189


**FM 26 dB BANDWIDTH - INPUT**

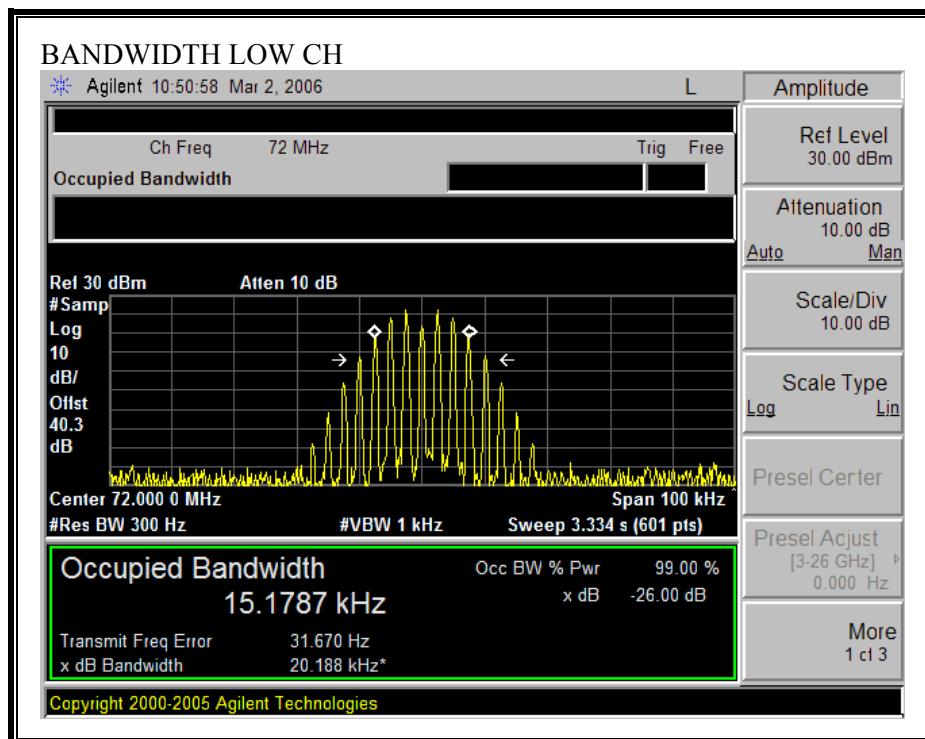

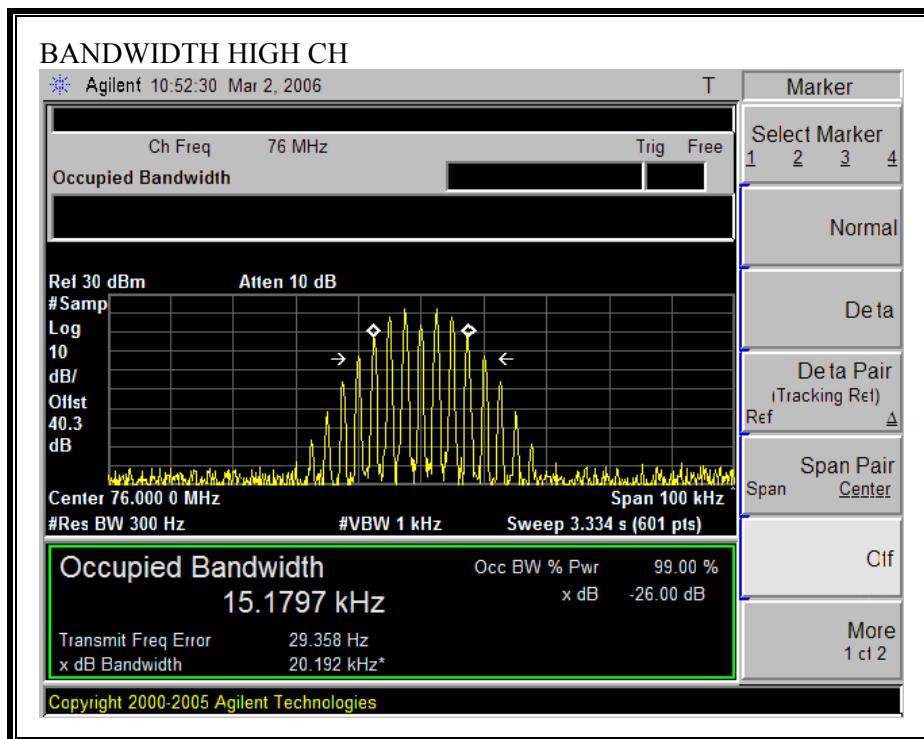

**FM 26 dB BANDWIDTH -OUTPUT**

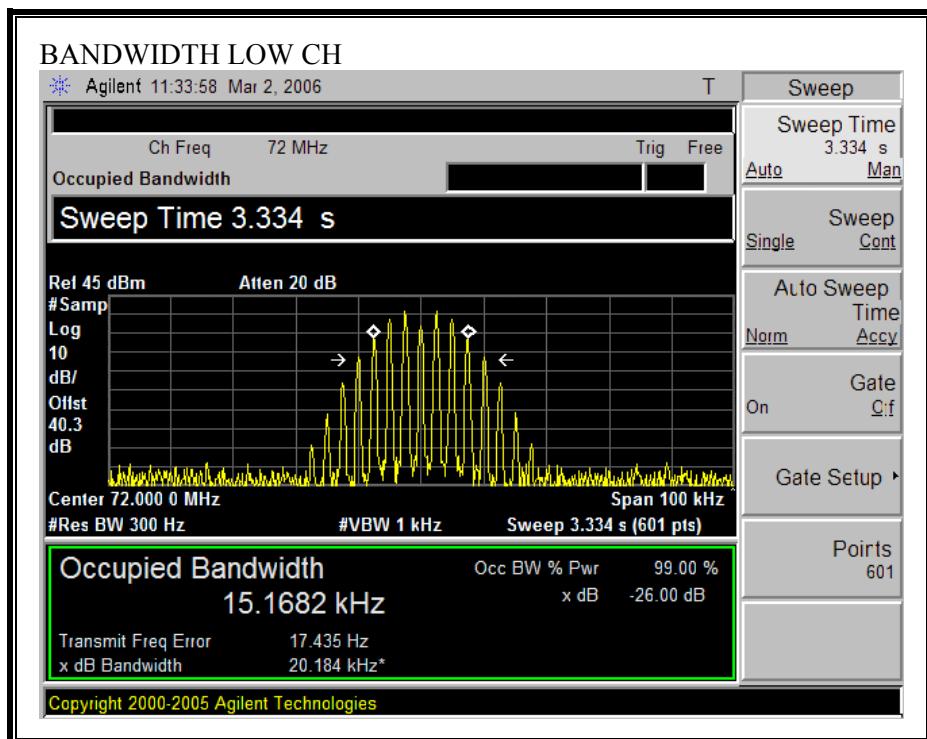

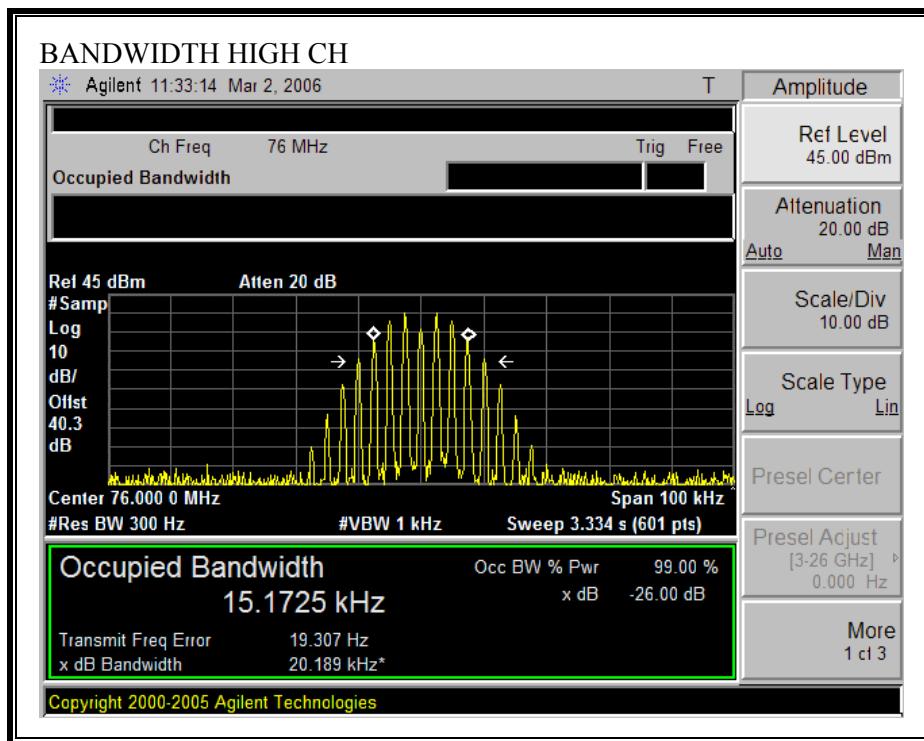

## 7.2. FM EMISSION LIMITATION

### LIMIT

§90.210 (c) & 22.359 (b): For transmitters that are not equipped with an audio low-pass filter, the power of any emission must be attenuated below the un-modulated carrier power (P) as follows:

- (1) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 5 kHz, but no more than 10 kHz: At least  $83 \log (fd/5)$  dB;
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 10 kHz, but not more than 250 percent of the authorized bandwidth: At least  $29 \log (fd 2/11)$  dB or 50 dB, whichever is the lesser attenuation;
- (3) On any frequency removed from the center of the authorized bandwidth by more than 250 percent of the authorized bandwidth: At least  $43 + 10 \log (P)$  dB.


### TEST PROCEDURE


ANSI / TIA / EIA 603 Clause 3.2.11

### RESULTS


No non-compliance noted:


**Un-modulated Signal:**

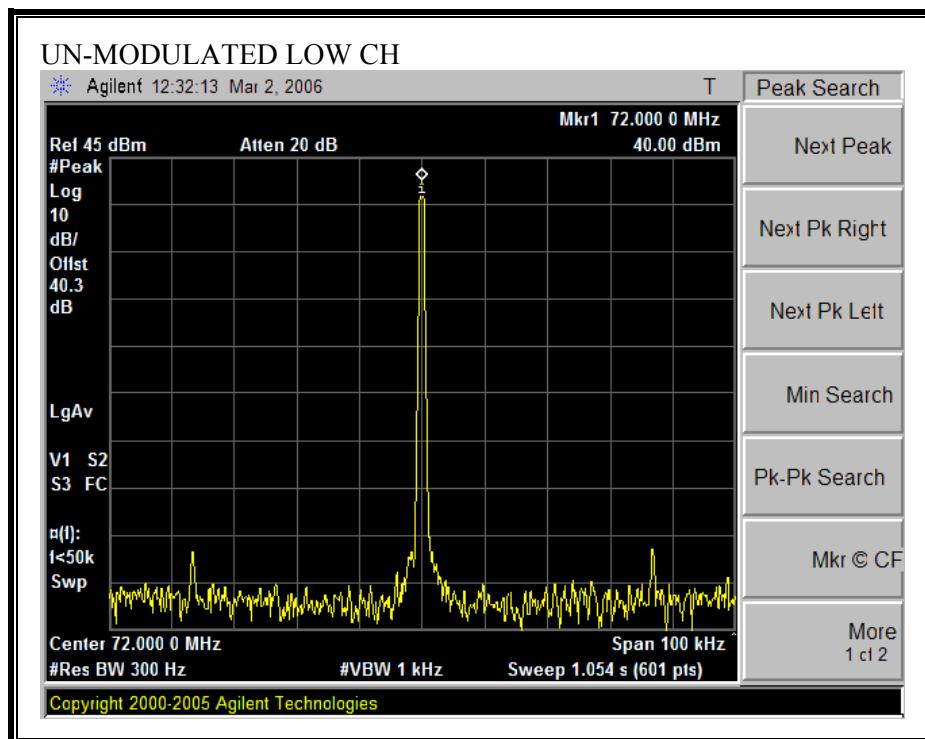

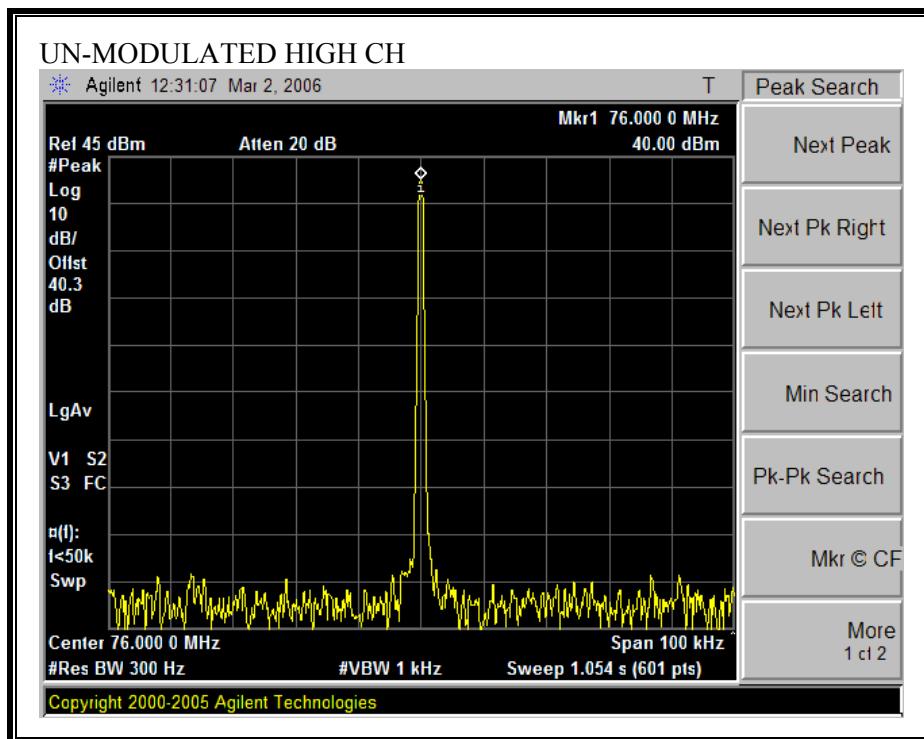

**FM EMISSIONS MASK**

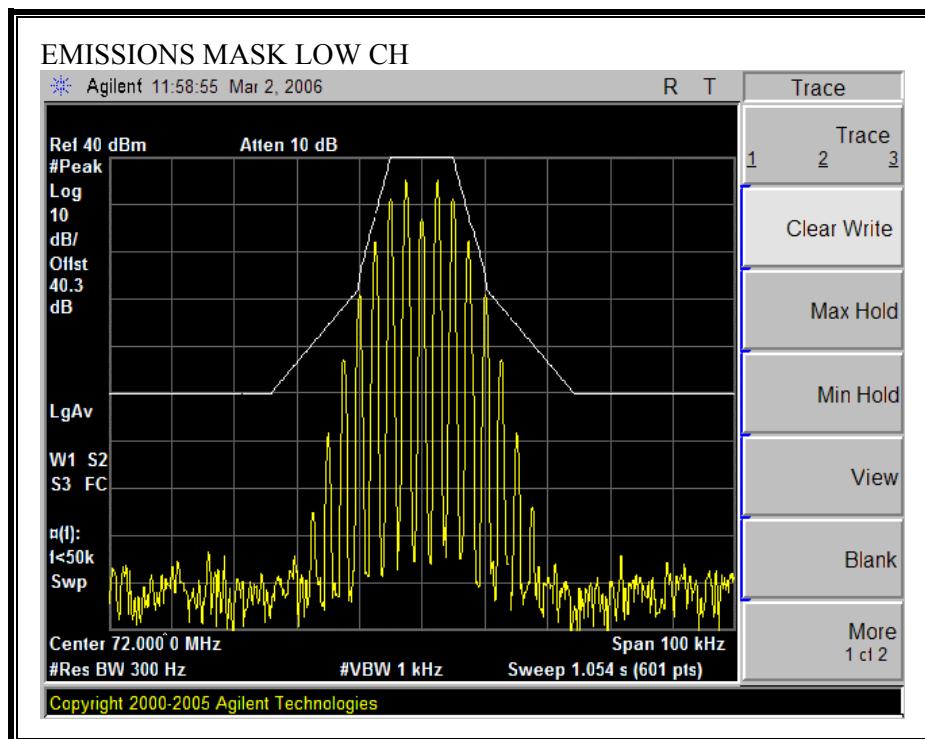

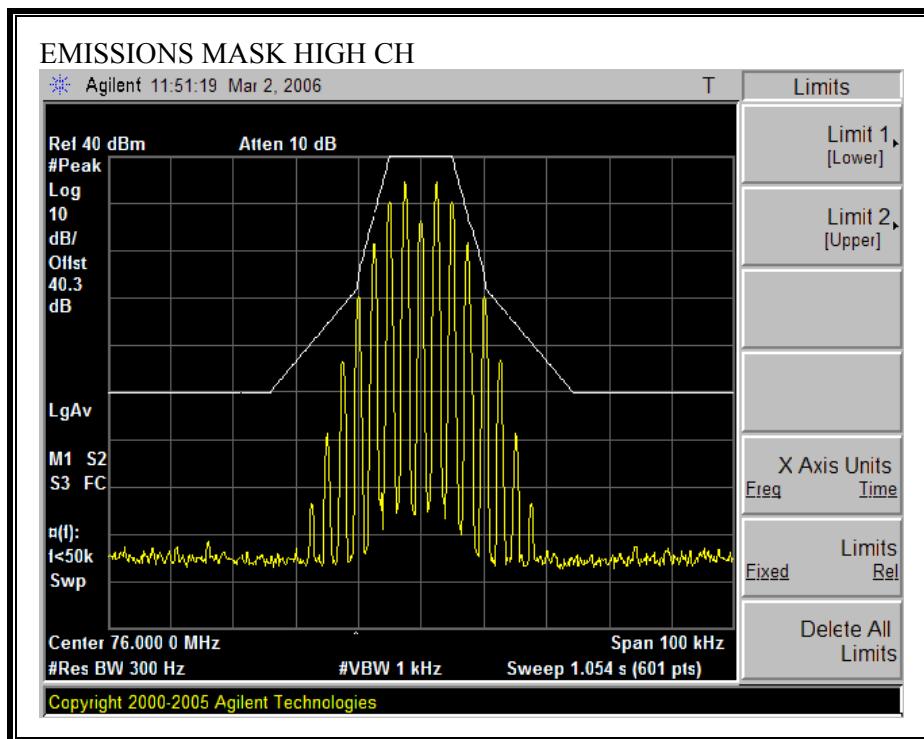

### 7.3. MODULATION CHARACTERISTICS

Not Applicable. Due to this EUT is a power amplifier and has no Mix circuitry to modulate the RF signal.

### 7.4. RF POWER OUTPUT

#### LIMIT

The Maximum ERP of base transmitters and cellular repeaters must not exceed 500 Watts.

FCC part 90: The Maximum ERP transmitter power will be considered and authorized on a case-by-case basis. Please refer to the limitations on power and antenna heights are specified in §90.205, §90.279, and §90.309.

#### TEST PROCEDURE

ANSI / TIA / EIA 603 Clause 3.2.1


#### RESULTS


No non-compliance noted.

CW Output Power

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	72	39.99	9.98
High	76	40.00	10.00

**Conducted Output Power**

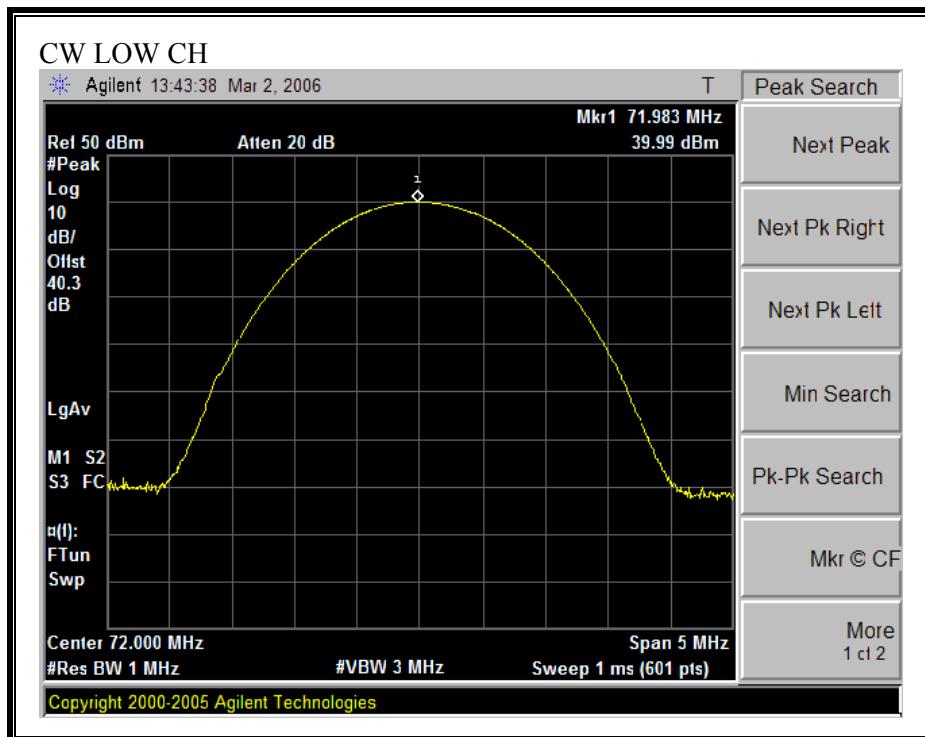

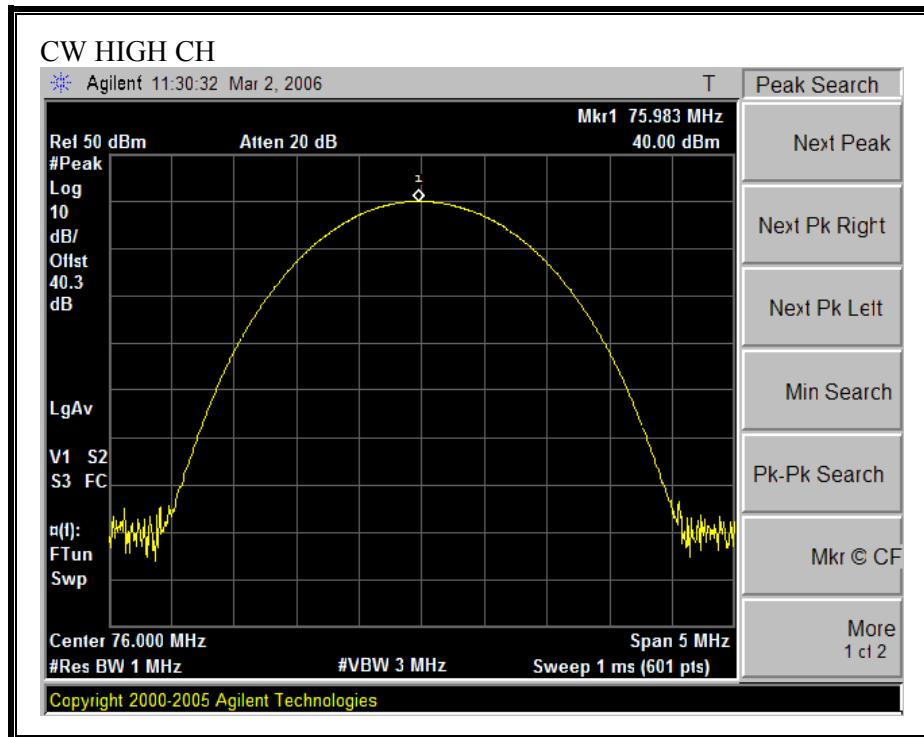

## 7.5. VOLTAGE STABILITY

### LIMIT

The Maximum ERP of base transmitters and cellular repeaters must not exceed 500 Watts.

FCC part 90: The Maximum ERP transmitter power will be considered and authorized on a case-by-case basis. Please refer to the limitations on power and antenna heights are specified in §90.205, §90.279, and §90.309.

### TEST PROCEDURE

ANSI / TIA / EIA 603 Clause 3.2.1

### Conducted Output Power vs Voltage

CW Output Power vs Voltage

Channel Frequency (MHz)	Output Power at normal voltage AC		Output Power at 85% voltage AC		Output Power at 115% voltage AC	
	120	102	138	dBm	Watt	dBm
72	39.99	9.98	39.99	9.98	40.00	10.00
76	40.00	10.00	39.99	9.98	39.99	9.98

## **7.6. FREQUENCY STABILITY**

Not Applicable. Due to this EUT is a power amplifier and has no Local Oscillator circuitry to shift the RF signal.

## **7.7. SPURIOUS EMISSION AT ANTENNA TERMINAL**

### **LIMIT**

§22.861 and §90.210 Out of band emissions, The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB.


### **TEST PROCEDURE**

ANSI / TIA / EIA 603 Clause 3.2.13, FCC 22.861, & FCC 90.210


### **RESULTS**

No non-compliance noted.

Low Channel, 10MHz to 1000MHz

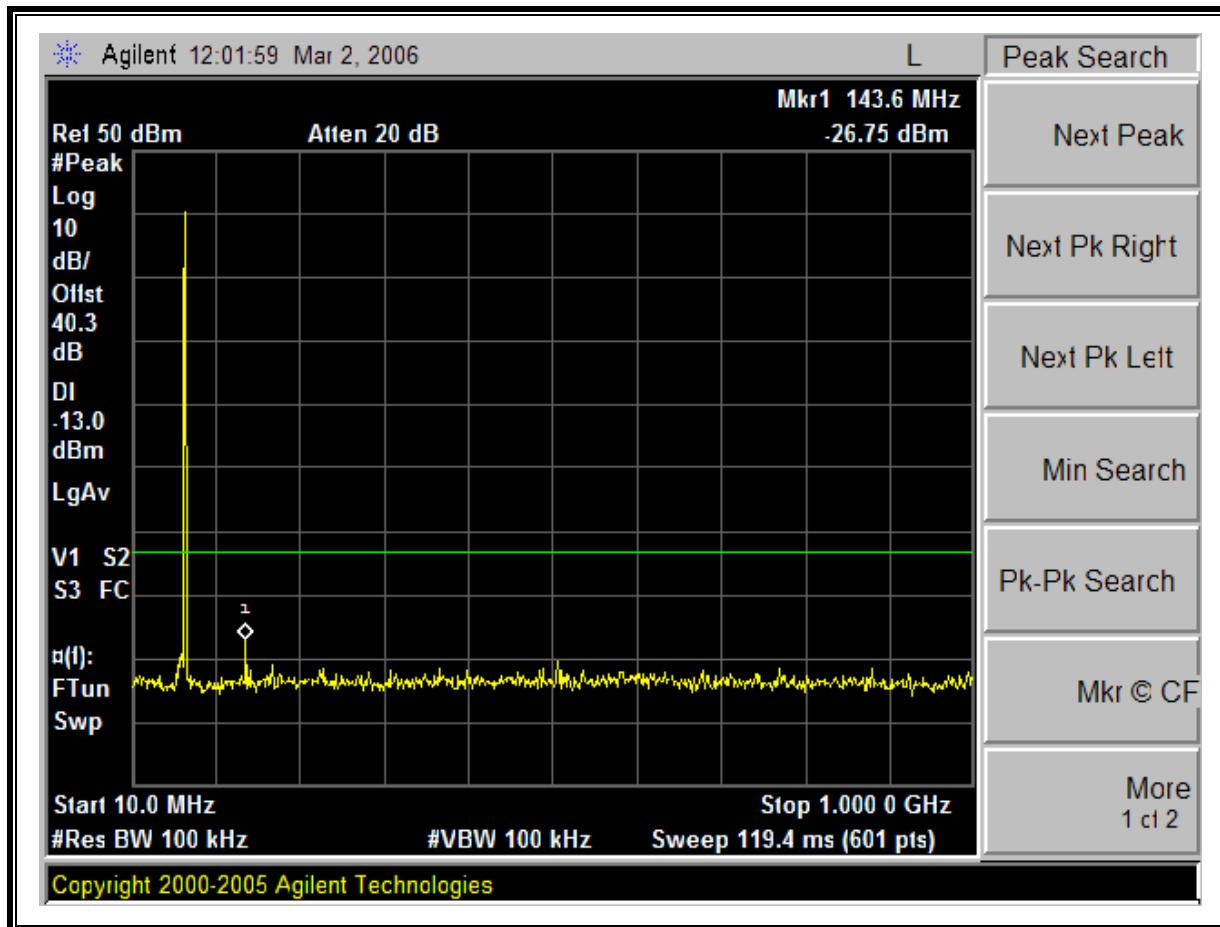

High Channel, 10MHz to 1000MHz

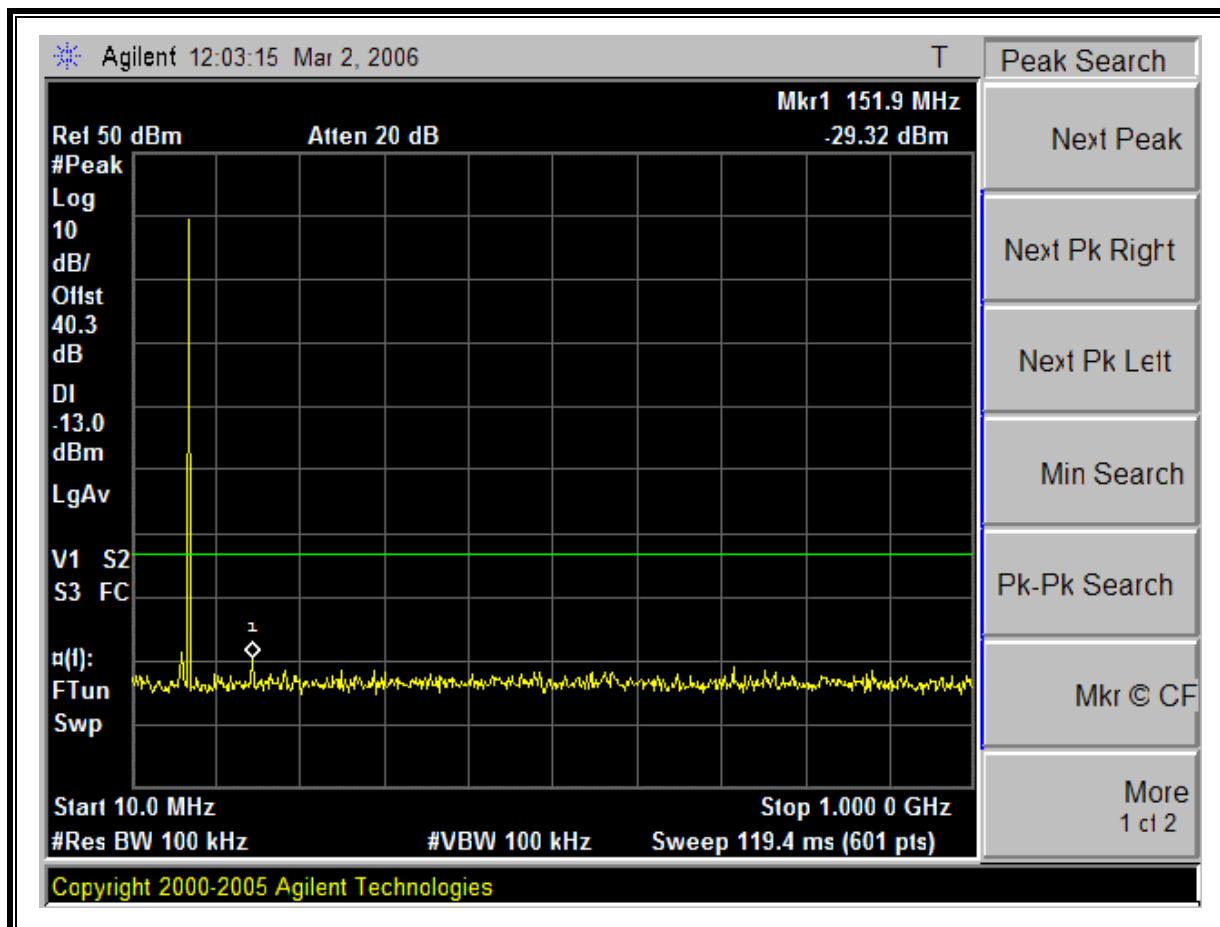

## 7.8. FIELD STRENGTH OF SPURIOUS RADIATION

### LIMIT

§22.861 and §90.210 Out of band emissions, The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

### TEST PROCEDURE

ANSI / TIA / EIA 603 Clause 3.2.13, FCC 22.861, & FCC 90.210

### RESULTS

No non-compliance noted.


### 7.8.1. SPURIOUS RADIATION

#### Spurious & Harmonic (ERP),


03/02/06 30 - 1000MHz Substitution Measurement Compliance Certification Services, Morgan Hill 5m Chamber Site										
Test Engr:Chin Pang Project #: 06U10123-1 Company:TPL Communication Inc. EUT Descrip.:RF Power Amplifier. EUT M/N:PA2-2AB-RSPS-P1 Test Target: FCC Part 22 and 90 Mode Oper:Normal Operation.										
Test Equipment:										
Bilog Antenna			Cable			Pre-amplifier 8447D			Limit	
f MHz	SA reading (dBuV/m)	Ant. Pol. (H/V)	SG reading (dBm)	CL (dB)	Gain (dBi)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch, 72MHz										
144.00	66.0	V	-42.7	1.5	-0.4	-2.5	-46.7	-13.0	-33.7	
216.00	59.2	V	-51.1	1.9	5.8	3.6	-49.3	-13.0	-36.3	
366.00	53.2	V	-52.6	2.3	6.0	3.9	-51.0	-13.0	-38.0	
144.00	65.4	H	-42.6	1.5	-0.4	-2.5	-46.7	-13.0	-33.7	
216.00	60.7	H	-49.6	1.9	5.8	3.6	-47.8	-13.0	-34.8	
366.00	57.0	H	-47.9	2.3	6.0	3.9	-46.3	-13.0	-33.3	
High Ch, 76MHz										
152.00	64.4	V	-43.7	1.6	0.6	-1.6	-46.9	-13.0	-33.9	
228.00	55.3	V	-54.6	1.9	5.9	3.7	-52.7	-13.0	-39.7	
384.00	64.0	V	-41.4	2.3	6.0	3.9	-39.9	-13.0	-26.9	
152.00	68.4	H	-40.3	1.6	0.6	-1.6	-43.5	-13.0	-30.5	
228.00	58.2	H	-51.7	1.9	5.9	3.7	-49.9	-13.0	-36.9	
384.00	65.6	H	-38.9	2.3	6.0	3.9	-37.3	-13.0	-24.3	


## 8. SETUP PHOTOS

### ANTENNA PORT CONDUCTED RF MEASUREMENT SETUP

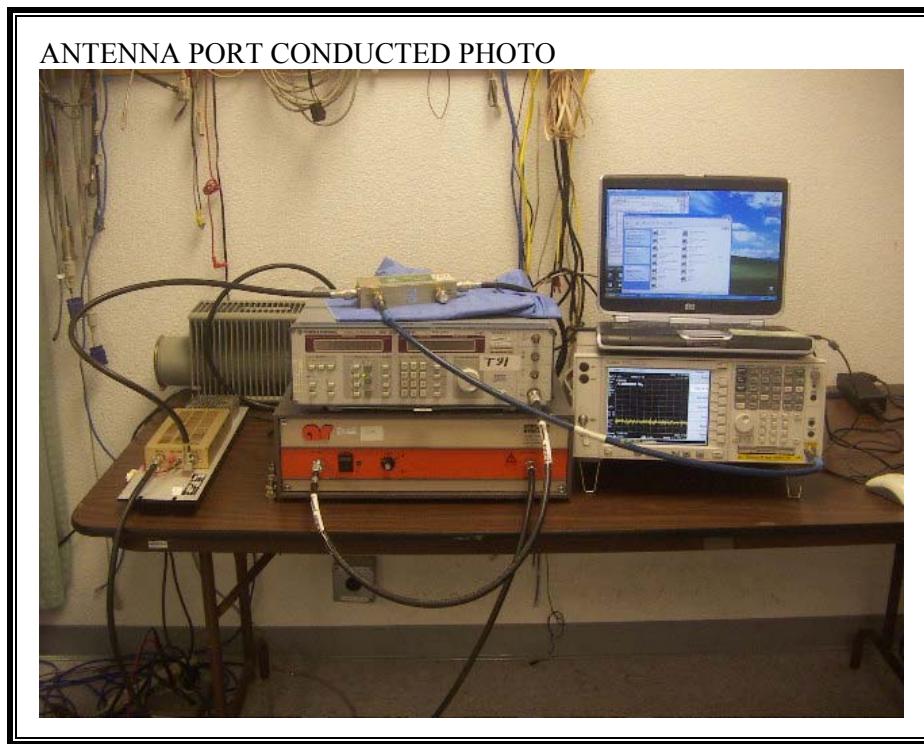

**RADIATED RF MEASUREMENT SETUP**

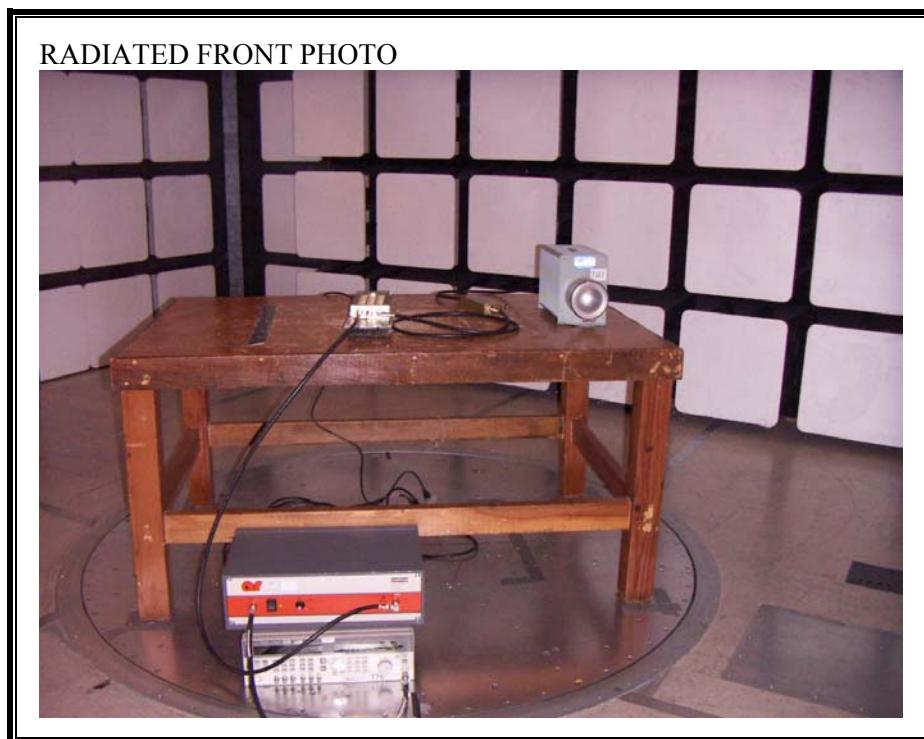

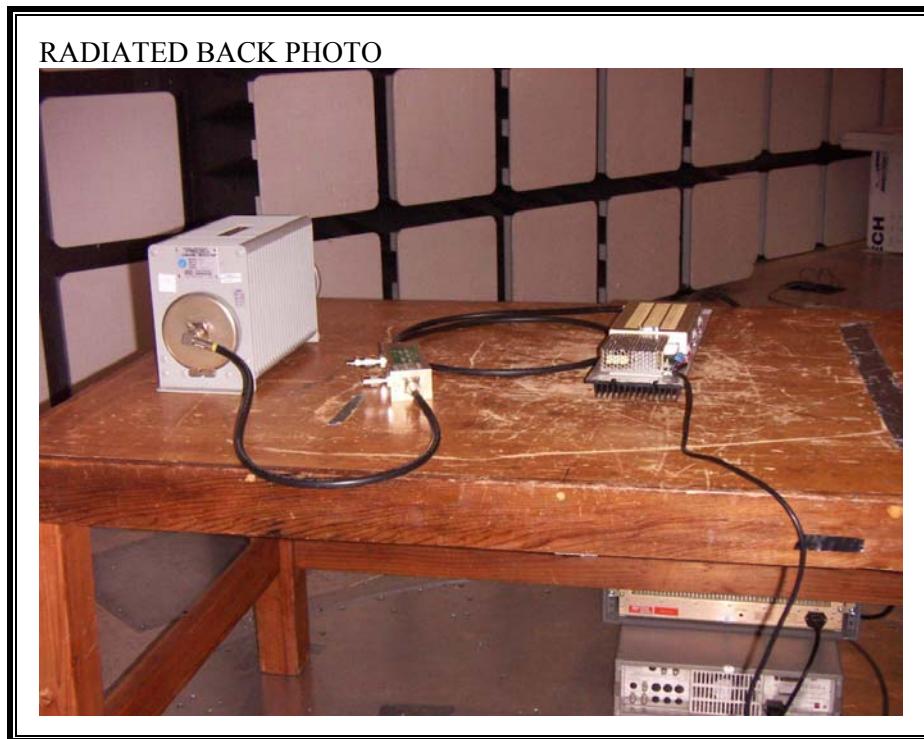

**END OF REPORT**