



## FCC PART 90

### TEST AND MEASUREMENT REPORT

For

### TPL Communications Inc.

3370 San Fernando Road, Unit 206,  
Los Angeles, CA 90065, USA

**FCC ID: BBD3-60**

<b>Report Type:</b> Original Report	<b>Product Type:</b> VHF RF Power Amplifier
<b>Prepared By</b> <u>Wei Sun</u> <i>Wei Sun</i>	
<b>Report Number</b> <u>R12091326-90</u>	
<b>Report Date</b> <u>2012-10-04</u>	
Quinn Jiang <i>Quinn Jiang</i>	
<b>Reviewed By</b> <u>Test Engineer</u> <i>Test Engineer</i>	
Bay Area Compliance Laboratories Corp. 1274 Anvilwood Avenue, Sunnyvale, CA 94089, USA Tel: (408) 732-9162 Fax: (408) 732 9164	

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by A2LA\* or any agency of the Federal Government.

\* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “\*” (Rev.2)

## TABLE OF CONTENTS

<b>1</b>	<b>GENERAL INFORMATION .....</b>	<b>5</b>
1.1	PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	5
1.2	MECHANICAL DESCRIPTION OF EUT.....	5
1.3	OBJECTIVE .....	5
1.4	RELATED SUBMITTAL(S)/GRANT(S).....	5
1.5	TEST METHODOLOGY.....	5
1.6	MEASUREMENT UNCERTAINTY .....	6
1.7	TEST FACILITY .....	6
<b>2</b>	<b>SYSTEM TEST CONFIGURATION .....</b>	<b>7</b>
2.1	JUSTIFICATION .....	7
2.2	EUT EXERCISE SOFTWARE .....	7
2.3	EQUIPMENT MODIFICATIONS .....	7
2.4	SPECIAL EQUIPMENT .....	7
2.5	LOCAL SUPPORT EQUIPMENT .....	7
2.6	EUT INTERNAL CONFIGURATION DETAILS .....	7
2.7	EXTERNAL I/O CABLING LIST AND DETAILS.....	7
<b>3</b>	<b>SUMMARY OF TEST RESULTS .....</b>	<b>8</b>
<b>4</b>	<b>FCC §2.1046 &amp; §90.205 – RF OUTPUT POWER .....</b>	<b>9</b>
4.1	APPLICABLE STANDARDS.....	9
4.2	TEST PROCEDURE.....	9
4.3	TEST SETUP BLOCK DIAGRAM .....	9
4.4	TEST EQUIPMENT LIST AND DETAILS.....	9
4.5	TEST ENVIRONMENTAL CONDITIONS .....	10
4.6	TEST RESULTS.....	10
<b>5</b>	<b>FCC §2.1049, §90.209 &amp; §90.210 – EMISSION BANDWIDTH &amp; MASK.....</b>	<b>12</b>
5.1	APPLICABLE STANDARD .....	12
5.2	TEST PROCEDURE.....	13
5.3	TEST SETUP BLOCK DIAGRAM .....	14
5.4	TEST EQUIPMENT LIST AND DETAILS .....	14
5.5	TEST ENVIRONMENTAL CONDITIONS .....	14
5.6	TEST RESULTS.....	15
<b>6</b>	<b>FCC §2.1051 &amp; §90.210 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....</b>	<b>38</b>
6.1	APPLICABLE STANDARD .....	38
6.2	TEST PROCEDURE.....	38
6.3	TEST SETUP BLOCK DIAGRAM .....	38
6.4	TEST EQUIPMENT LIST AND DETAILS .....	39
6.5	TEST ENVIRONMENTAL CONDITIONS .....	39
6.6	TEST RESULTS.....	39
<b>7</b>	<b>FCC §2.1053 &amp; §90.210 – FIELD STRENGTH OF SPURIOUS RADIATIONS .....</b>	<b>50</b>
7.1	APPLICABLE STANDARD .....	50
7.2	TEST PROCEDURE.....	50
7.3	TEST SETUP BLOCK DIAGRAM .....	51
7.4	TEST EQUIPMENT LIST AND DETAILS .....	51
7.5	TEST ENVIRONMENTAL CONDITIONS .....	52
7.6	TEST RESULTS.....	52
<b>8</b>	<b>FCC §2.1091 - RF EXPOSURE INFORMATION.....</b>	<b>53</b>

8.1	APPLICABLE STANDARDS.....	53
8.2	MPE PREDICTION.....	53
<b>9</b>	<b>EXHIBIT A - FCC ID LABELING AND WARNING STATEMENT .....</b>	<b>54</b>
9.1	FCC ID LABEL REQUIREMENT.....	54
9.2	FCC ID LABEL CONTENTS AND LOCATION.....	54
<b>10</b>	<b>EXHIBIT B - TEST SETUP PHOTOGRAPHS.....</b>	<b>55</b>
10.1	RADIATED EMISSIONS - FRONT VIEW.....	55
10.2	RADIATED EMISSIONS - REAR VIEW (BELOW 1 GHz).....	55
10.3	RADIATED EMISSIONS - REAR VIEW (ABOVE 1 GHz) .....	56
<b>11</b>	<b>EXHIBIT C - EUT PHOTOGRAPHS .....</b>	<b>57</b>
11.1	EUT TOP VIEW.....	57
11.2	EUT - BOTTOM VIEW.....	57
11.3	EUT – SIDE VIEW 1.....	58
11.4	EUT – SIDE VIEW 2.....	58
11.5	EUT – FRONT VIEW .....	59
11.6	EUT – REAR VIEW .....	59
11.7	EUT – OPEN CASE VIEW.....	60
11.8	EUT – PCB COMPONENT VIEW .....	60
11.9	EUT – PCB SOLDER VIEW.....	61

**DOCUMENT REVISION HISTORY**

<b>Revision Number</b>	<b>Report Number</b>	<b>Description of Revision</b>	<b>Date of Revision</b>
0	R12091326-90	Original Report	2012-10-04

## 1 GENERAL INFORMATION

### 1.1 Product Description for Equipment under Test (EUT)

This test and measurement report was prepared on behalf of *TPL Communications, Inc.*, and their product, FCC ID: BBD3-60 model: PA3-1XC, which will henceforth be referred to as the EUT “Equipment under Test”. The EUT is a VHF RF Power Amplifier. Two 50 Ω SMA connectors are used to connect the input and output of the amplifier. The frequency band is: 136~174 MHz.

Specifications	
Frequency Bands	136-174 MHz
Modulation Type	FM
Emission Designator	F1E, F3E, F1D, F2D, F1W, F7W, FXW, FXE
RF Output Power	15-60 Watt
Channel Spacing	12.5 kHz, 6.25 kHz
Power Supply	13.8 Vdc

### 1.2 Mechanical Description of EUT

The EUT Approximate measurement is: 29.5 cm (L) x 14 cm (W) x 7.6 cm (H). Weight: 1.8kg.

*The test data gathered are from typical production sample, serial number: 12091326-1 assigned by BACL.*

### 1.3 Objective

This type approval report is prepared on behalf of *TPL Communications, Inc.*, accordance with Part 90.

### 1.4 Related Submittal(s)/Grant(s)

No Related Submittals

### 1.5 Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of federal Regulations Title 47 Part 2, as well as the following individual parts:

Part 90 – Private Land Mobile Radio Service

Applicable Standards: TIA603-C

All emissions measurement was performed by Bay Area Compliance Laboratories Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

## 1.6 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR16-4-2:2003, The Treatment of Uncertainty in EMC Measurements, the values ranging from  $\pm 2.0$  dB for Conducted Emissions tests and  $\pm 4.0$  dB for Radiated Emissions tests are the most accurate estimates pertaining to uncertainty of EMC measurements at BACL Corp.

## 1.7 Test Facility

The test site used by BACL Corp. to collect radiated and conducted emissions measurement data is located at its facility in Sunnyvale, California, USA.

The test site at BACL Corp. has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997, and Article 8 of the VCCI regulations on December 25, 1997. The test site also complies with the test methods and procedures set forth in CISPR 22:2008 §10.4 for measurements below 1 GHz and §10.6 for measurements above 1 GHz as well as ANSI C63.4-2003, ANSI C63.4-2009, TIA/EIA-603 & CISPR 24:2010.

The Federal Communications Commission and Voluntary Control Council for Interference have the reports on file and they are listed under FCC registration number: 90464 and VCCI Registration No.: A-0027. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BACL Corp. is an American Association for Laboratory Accreditation (A2LA) accredited laboratory (Lab Code 3297-02). The current scope of accreditations can be found at

<http://www.a2la.org/scopepdf/3297-02.pdf?CFID=1132286&CFTOKEN=e42a3240dac3f6ba-6DE17DCB-1851-9E57-477422F667031258&jsessionid=8430d44f1f47cf2996124343c704b367816b>

## 2 SYSTEM TEST CONFIGURATION

### 2.1 Justification

The EUT was configured for testing according to TIA/EIA-603-C.

The EUT was tested in the normal (native) operating mode to represent *worst-case* results during the final qualification test.

### 2.2 EUT Exercise Software

Signal was sent through EUT using a signal generator.

### 2.3 Equipment Modifications

No modification was made to the EUT

### 2.4 Special Equipment

No special equipment was used during testing

### 2.5 Local Support Equipment

Manufacturer	Description	Model	Serial Number
Electronic Measurements Inc.	TCR power supply	TCR 80S34-2-0V	92D-6839
IFI	Wideband Amplifier	CMX5001	2194-1296

### 2.6 EUT Internal Configuration Details

Manufacturer	Description	Model	Serial Number
TPL Communications, Inc	PCB Board	PA3-1XC	102944C

### 2.7 External I/O Cabling List and Details

Cable Descriptions	Length (m)	From	To
RF cable	<1	Signal Generator	Amplifier
RF cable	<1	Output/ EUT	Attenuator
RF cable	<1	Amplifier	Input/ EUT
RF cable	<1	Attenuator	Spectral Analyzer

### 3 SUMMARY OF TEST RESULTS

FCC Rules	Description of Tests	Results
§1.1310, §2.1091	RF Exposure	Compliant
§2.1046, §90.205	RF Output Power	Compliant
§2.1047, §90.207	Modulation Characteristics, Audio Frequency Response and Audio Filter Response	N/A <sup>1</sup>
§2.1049, §90.209/90.210	Occupied Bandwidth and Emission Mask	Compliant
§2.1051, §90.210	Spurious Emissions at Antenna Terminals	Compliant
§2.1055, §90.213	Frequency Stability	N/A <sup>2</sup>
§2.1051, §90.210	Field Strength of Spurious Radiation	Compliant
§ 90.214	Transient Frequency Behavior	N/A <sup>1</sup>

*Note:*

N/A<sup>1</sup> - Not applicable due to the EUT is a power amplifier and has no mix circuitry to modulate the RF signal.

N/A<sup>2</sup> - The EUT is the amplifier and does not contain modulation circuitry or frequency generation.

## 4 FCC §2.1046 & §90.205 – RF OUTPUT POWER

### 4.1 Applicable Standards


According to FCC §2.1046, and §90.205, maximum ERP is dependent upon the station's antenna HAAT and required service area.

### 4.2 Test Procedure

*Conducted:*

The RF output of the transmitter was connected to the signal generator and the spectrum analyzer through sufficient attenuation.

### 4.3 Test Setup Block Diagram

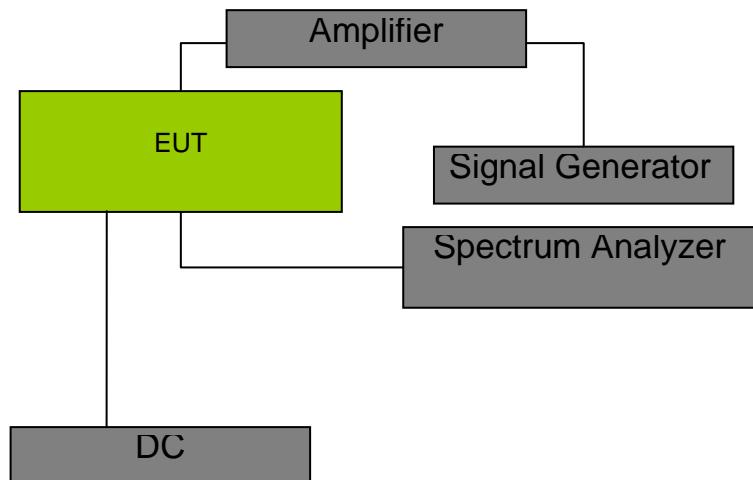

### 4.4 Test Equipment List and Details

Manufacturers	Descriptions	Models	Serial Numbers	Calibration Dates
Agilent	Spectrum Analyzer	E4440A	MY44303352	2012-05-10
HP	Signal Generator	8648C	3426A00417	2012-08-18
Electronic Measurements Inc.	TCR power supply	TCR 80S34-2-0V	92D-6839	N/R
Agilent	Signal Generator	E4438C	MY45091309	2012-05-03
IFI	Wideband Amplifier	CMX5001	2194-1296	N/R

**Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

#### 4.5 Test Environmental Conditions

<b>Temperature:</b>	22-24°C
<b>Relative Humidity:</b>	50-55 %
<b>ATM Pressure:</b>	101-102kPa

The testing was performed by Wei Sun on 2012-09-19 on RF Site.

#### 4.6 Test Results

Input power: 36.50 dBm (High power)

For FM Voice Modulation, 12.5 kHz Channel Spacing

Frequency (MHz)	Conducted Output Power (dBm)	Conducted Output Power (Watt)
138.1	47.70	58.88
156	47.71	59.02
173.9	47.68	58.61

For FM Data Modulation, 12.5 kHz Channel Spacing

Frequency (MHz)	Conducted Output Power (dBm)	Conducted Output Power (Watt)
138.1	47.66	58.34
156	47.72	59.16
173.9	47.70	58.88

Input power: 30.39 dBm (Low power)

For FM Voice Modulation, 12.5 kHz Channel Spacing

Frequency (MHz)	Conducted Output Power (dBm)	Conducted Output Power (Watt)
138.1	42.09	16.18
156	42.21	16.63
173.9	42.13	16.33

For FM Data Modulation, 12.5 kHz Channel Spacing

Frequency (MHz)	Conducted Output Power (dBm)	Conducted Output Power (Watt)
138.1	42.11	16.26
156	42.24	16.75
173.9	42.17	16.48

Input power: 36.50 dBm (High power)

For FM Voice Modulation, 6.25 kHz Channel Spacing

Frequency (MHz)	Conducted Output Power (dBm)	Conducted Output Power (Watt)
138.1	47.69	58.75
156	47.74	59.43
173.9	47.73	59.29

For FM Data Modulation, 6.25 kHz Channel Spacing

Frequency (MHz)	Conducted Output Power (dBm)	Conducted Output Power (Watt)
138.1	47.68	58.61
156	47.70	58.88
173.9	47.69	58.75

Input power: 30.39 dBm (Low power)

For FM Voice Modulation, 6.25 kHz Channel Spacing

Frequency (MHz)	Conducted Output Power (dBm)	Conducted Output Power (Watt)
138.1	42.12	16.29
156	42.23	16.71
173.9	42.09	16.18

For FM Data Modulation, 6.25 kHz Channel Spacing

Frequency (MHz)	Conducted Output Power (dBm)	Conducted Output Power (Watt)
138.1	42.14	16.37
156	42.21	16.63
173.9	42.14	16.37

Note: The power range declared by the manufacture is 15-60 watts

## 5 FCC §2.1049, §90.209 & §90.210 – EMISSION BANDWIDTH & MASK

### 5.1 Applicable Standard

#### §90.209

Operations using equipment using a 25 kHz bandwidth will be authorized a 20 kHz bandwidth. Operations using equipment designed to operate with a 12.5 kHz channel bandwidth will be authorized an 11.25 kHz bandwidth.

#### §2.1049, §90.210

Emission Mask C. For transmitters that are not equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier output power (P) as follows:

- (1) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fdin kHz) of more than 5 kHz, but not more than 10 kHz: At least  $83 \log (fd/5)$  dB;
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fdin kHz) of more than 10 kHz, but not more than 250 percent of the authorized bandwidth: At least  $29 \log (fd/11)$  dB or 50 dB, whichever is the lesser attenuation;
- (3) On any frequency removed from the center of the authorized bandwidth by more than 250 percent of the authorized bandwidth: At least  $43 + 10 \log (P)$  dB.

Emission Mask E—6.25 kHz or less channel bandwidth equipment. For transmitters designed to operate with a 6.25 kHz or less bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f0 to 3.0 kHz removed from f0: Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fdin kHz) of more than 3.0 kHz but no more than 4.6 kHz: At least  $30 + 16.67(fd-3 \text{ kHz})$  or  $55 + 10 \log (P)$  or 65 dB, whichever is the lesser attenuation.
- (3) On any frequency removed from the center of the authorized bandwidth by more than 4.6 kHz: At least  $55 + 10 \log (P)$  or 65 dB, whichever is the lesser attenuation.
- (4) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two to three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emissions mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its bandwidth must not be less than the instrument resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (m) of this section. If it can be shown that use of the above instrumentation settings do not accurately represent the true interference potential of the equipment under test, then an alternate procedure may be used provided prior Commission approval is obtained.

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- 1) For any frequency removed from the center of the authorized bandwidth  $f_0$  to 5.625kHz removed from  $f_0$ , 0dB.
- 2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 5.626kHz but no more than 12.5kHz, at least 7.27 ( $f_d - 2.88$ kHz) dB.
- 3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 12.5kHz at least:

$50 + 10 \log P = 50 + 10 \log (P)$  or 70 dB, whichever is the lesser attenuation.

Emission Mask B. For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

- 1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.
- 2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.
- 3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least  $43 + \log (P)$  dB.


The resolution bandwidth was 100Hz or greater for measuring up to 250kHz from the edge of the authorized frequency segment, and 30kHz or greater for measuring more than 250kHz from the authorized frequency segment.

## 5.2 Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

According to the FCC 2-11-04/EAB/RF, Input and output signals were compared to verify that there was no any degradation to the signal due to amplification and conversion from the repeater using an RBW of 300 Hz or 1% of the emission bandwidth. Then the 20 dB & 99% bandwidth was recorded.

### 5.3 Test Setup Block Diagram

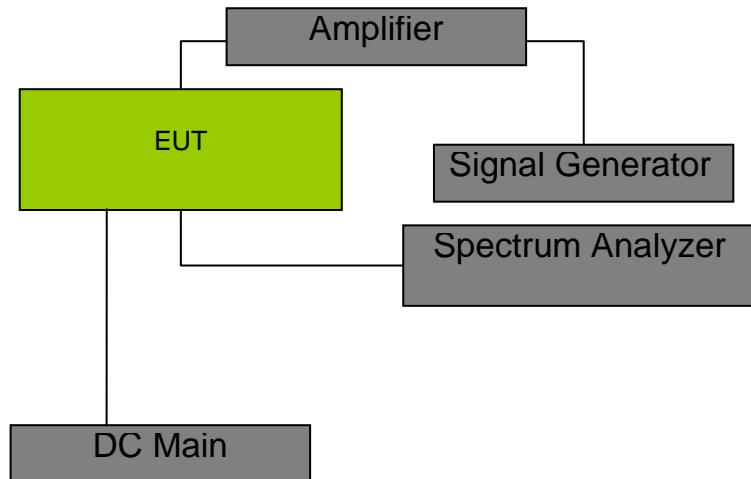

### 5.4 Test Equipment List and Details

Manufacturers	Descriptions	Models	Serial Numbers	Calibration Dates	Calibration Interval
Agilent	Spectrum Analyzer	E4440A	MY44303352	2012-05-10	1 year
HP	Signal Generator	8648C	3426A00417	2012-09-17	1 year
Agilent	Signal Generator	E4438C	MY45091309	2012-05-03	1 year
IFI	Wideband Amplifier	CMX5001	2194-1296	N/R	N/R

**Statement of Traceability:** BACL Corp. attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

### 5.5 Test Environmental Conditions

Temperature:	22-24°C
Relative Humidity:	50-55 %
ATM Pressure:	101-102kPa

The testing was performed by Wei Sun on 2012-09-24 on RF Site.

## 5.6 Test Results

For 12.5 kHz Channel Spacing, FM Voice Modulation

Frequency (MHz)	Input Occupied Bandwidth (kHz)	Output Occupied Bandwidth (kHz)
156	8.8457	8.7240

For 12.5 kHz Channel Spacing, FM Data Modulation

Frequency (MHz)	Input Occupied Bandwidth (kHz)	Output Occupied Bandwidth (kHz)
156	8.4451	8.5565

For 6.25 kHz Channel Spacing, FM Voice Modulation


Frequency (MHz)	Input Occupied Bandwidth (kHz)	Output Occupied Bandwidth (kHz)
156	4.0124	3.9394

For 6.25 kHz Channel Spacing, FM Data Modulation


Frequency (MHz)	Input Occupied Bandwidth (kHz)	Output Occupied Bandwidth (kHz)
156	4.3361	4.3050

Please refer to the following plots:


## 12.5 kHz channel Spacing with FM Voice Modulation Input

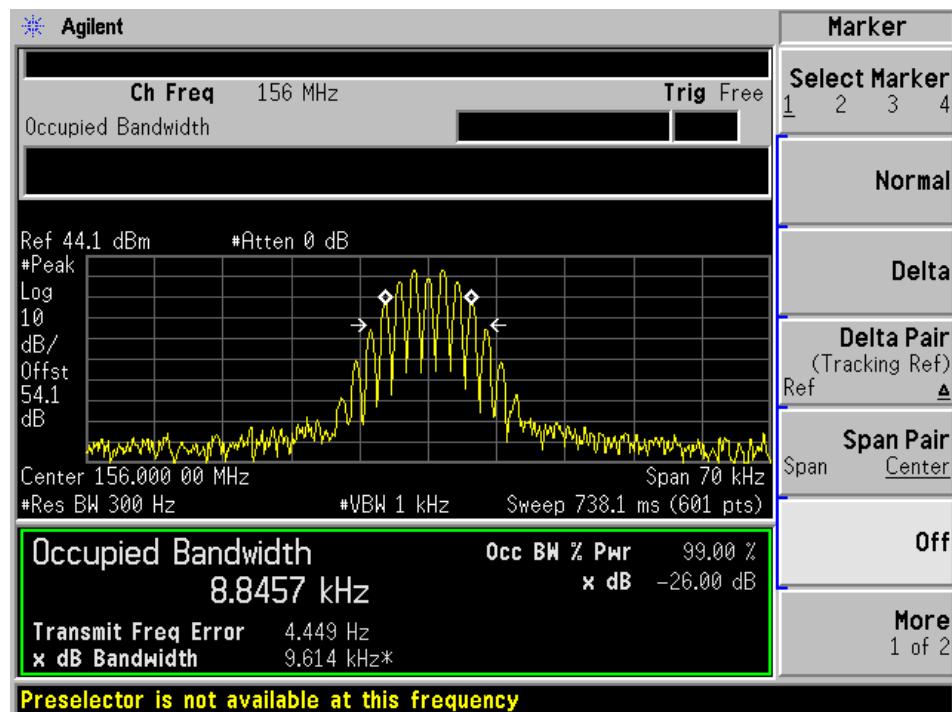


## 12.5 kHz channel Spacing with FM Voice Modulation Output

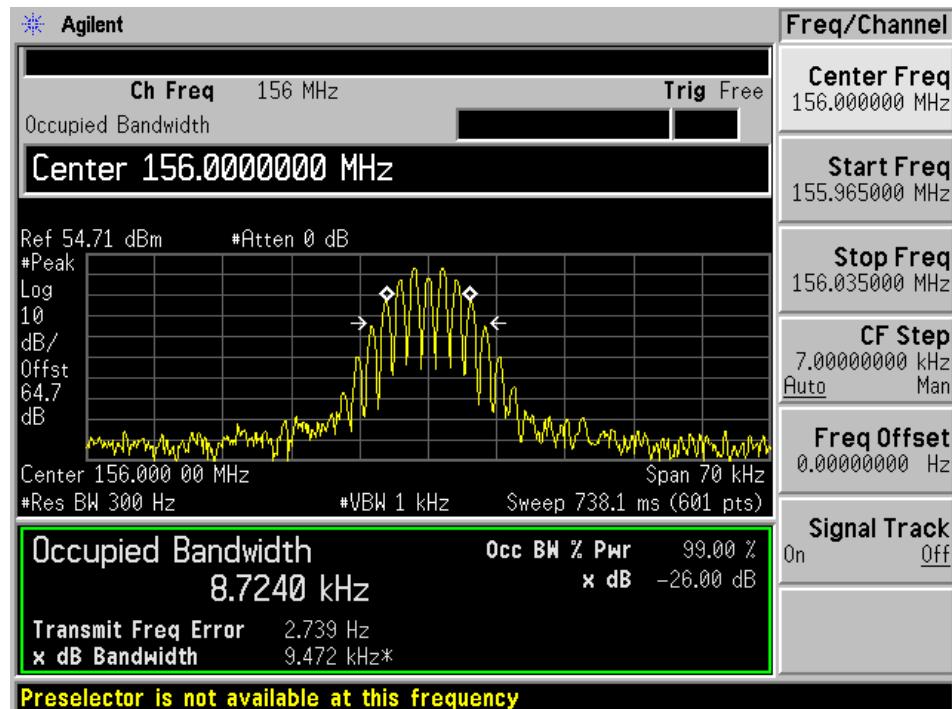


## 12.5 kHz channel Spacing with FM Data Modulation Input

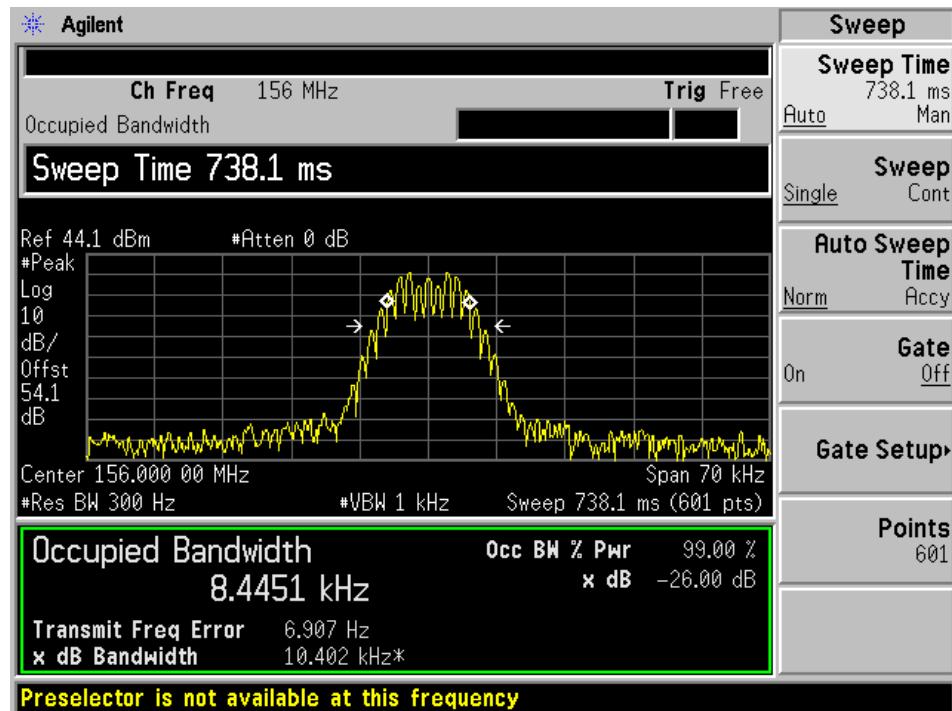


## 12.5 kHz channel Spacing with FM Data Modulation Output

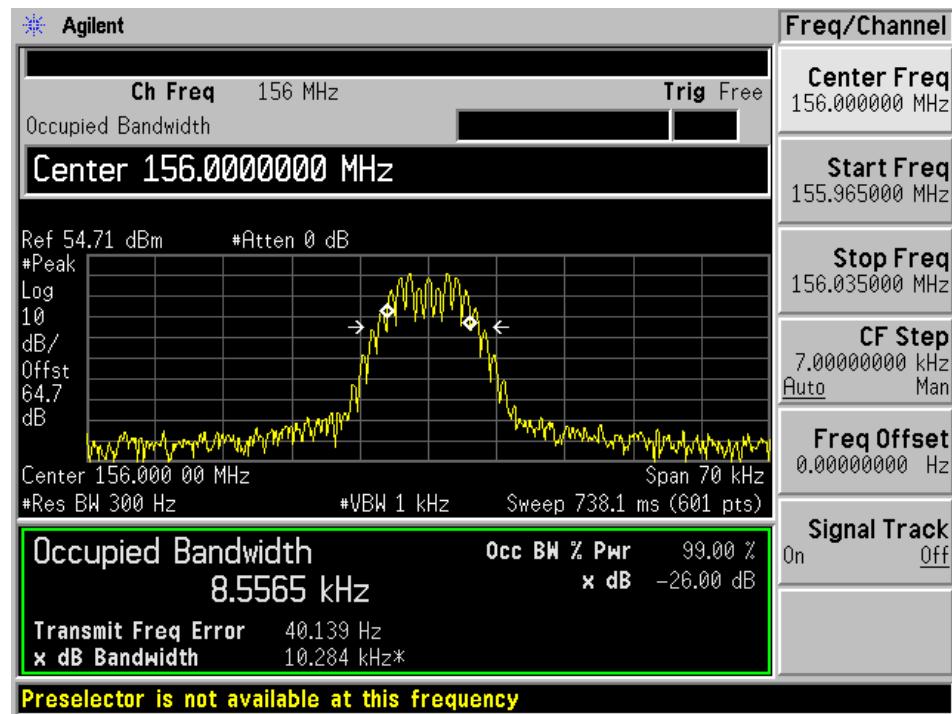


## 6.25 kHz channel Spacing with FM Voice Modulation Input

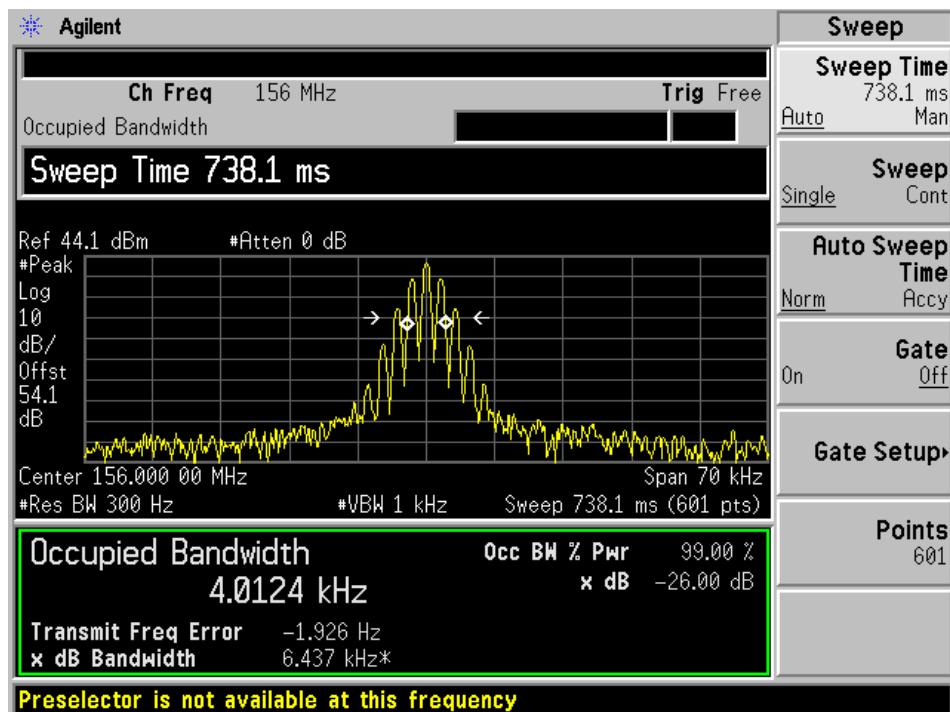


## 6.25 kHz channel Spacing with FM Voice Modulation Output

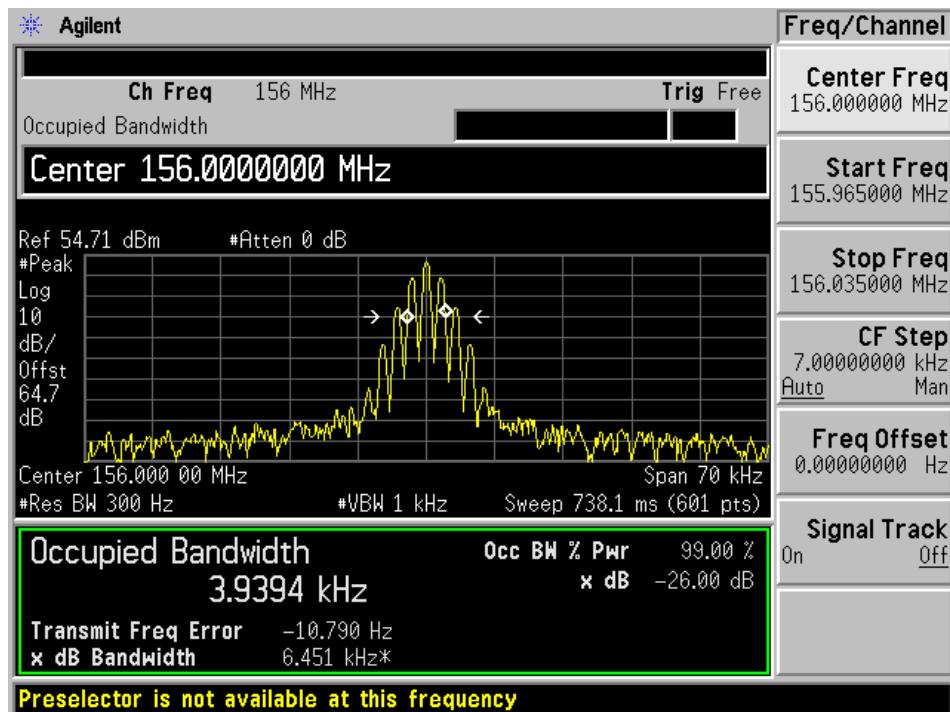

## 6.25 kHz channel Spacing with FM Data Modulation Input

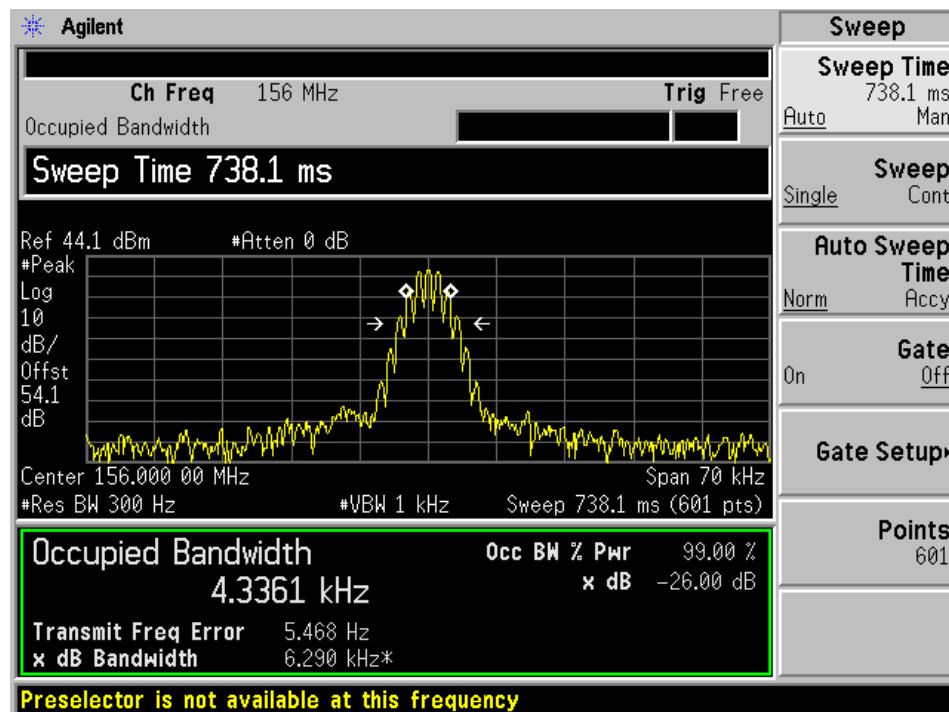


## 6.25 kHz channel Spacing with FM Data Modulation Output

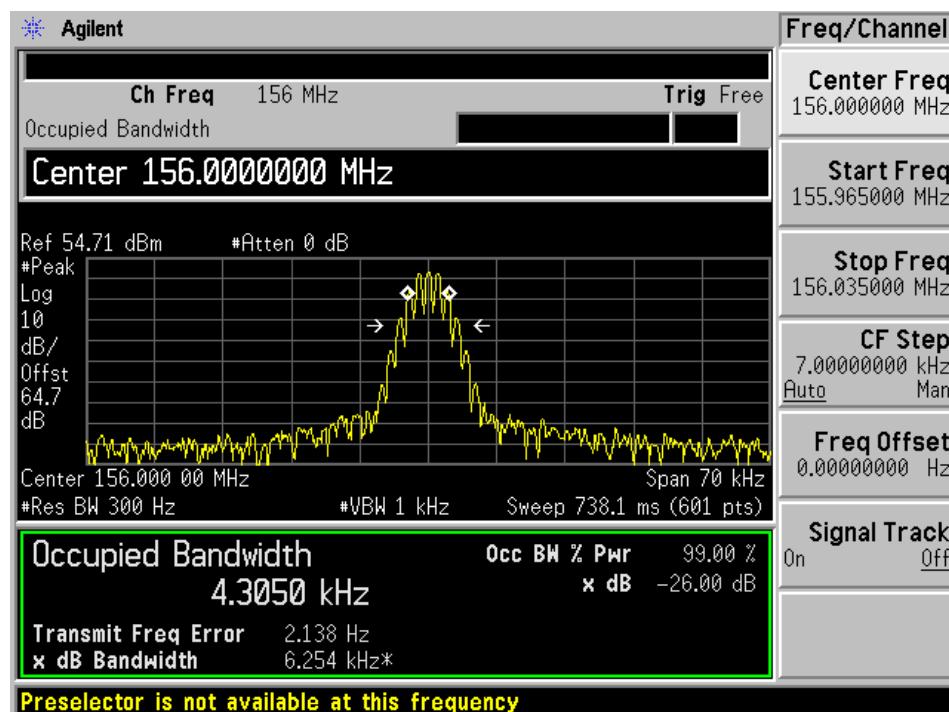


## 12.5 kHz Channel Spacing, Emission Mask B

Low Channel: 138.1 MHz

FM Voice Modulation

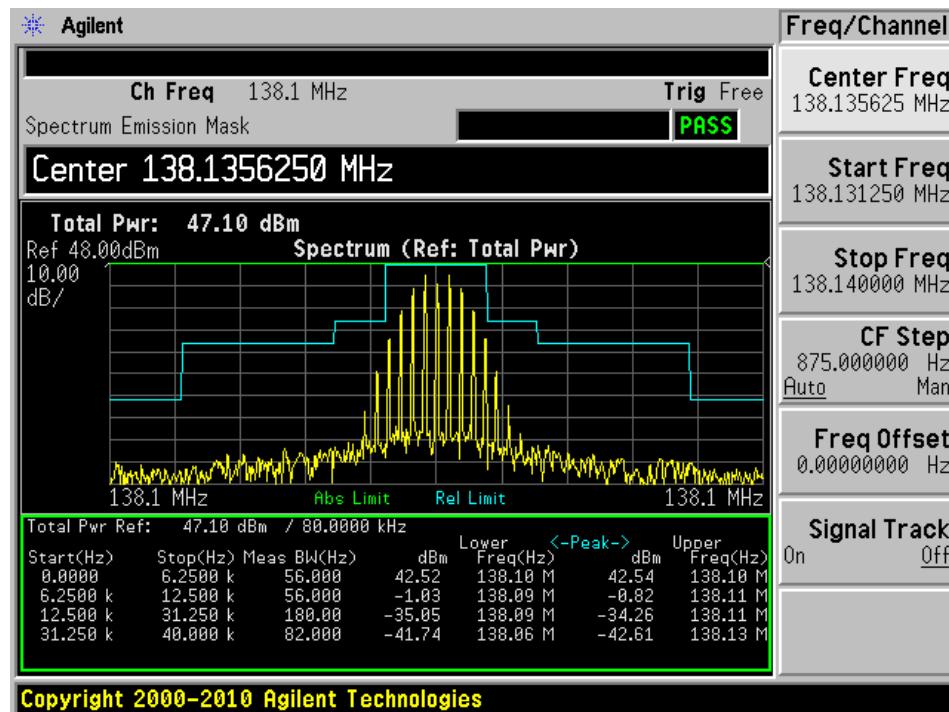


FM Data Modulation

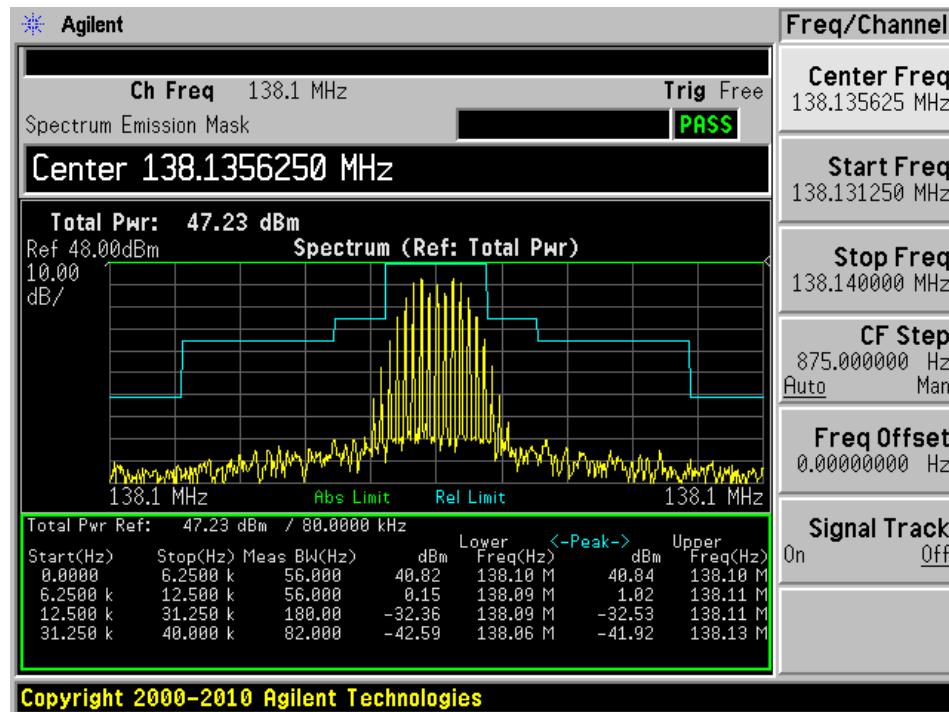


## Middle Channel: 156 MHz

## FM Voice Modulation

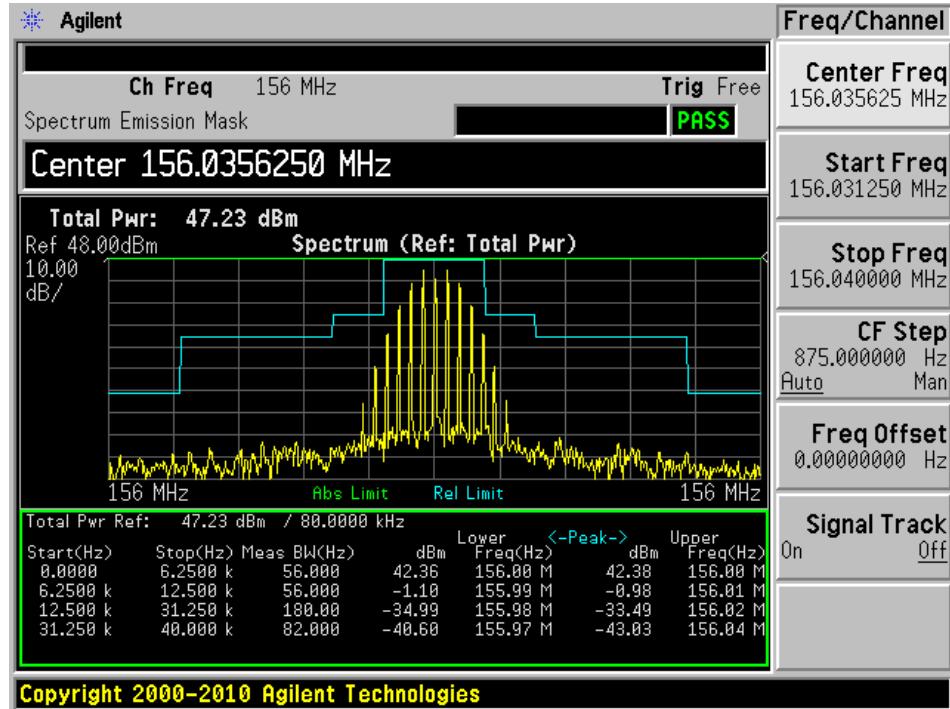


## FM Data Modulation

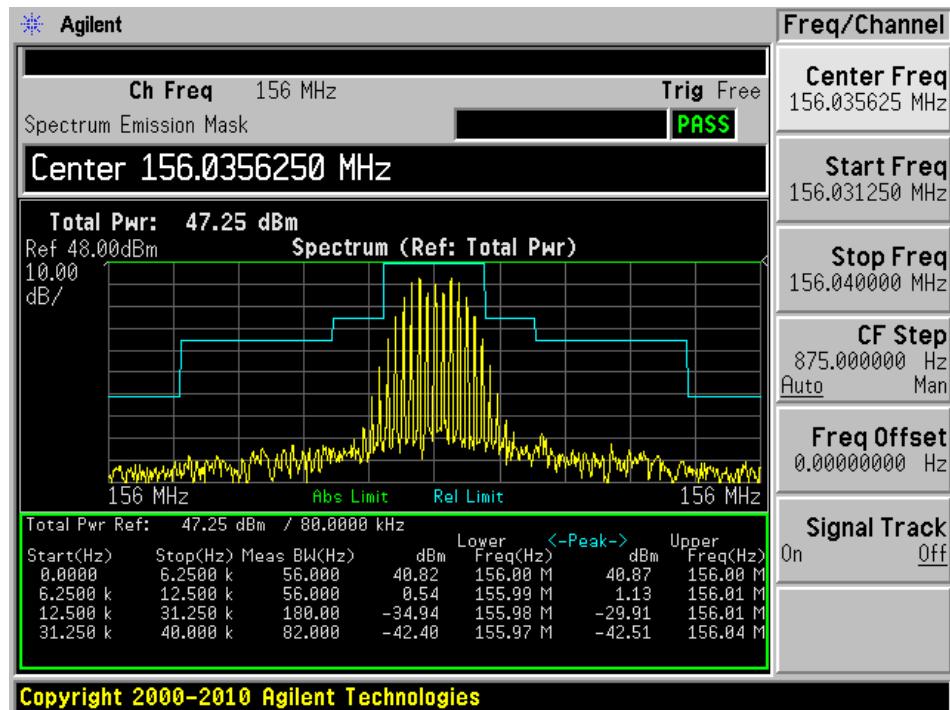


## High Channel: 173.9 MHz

FM Voice Modulation

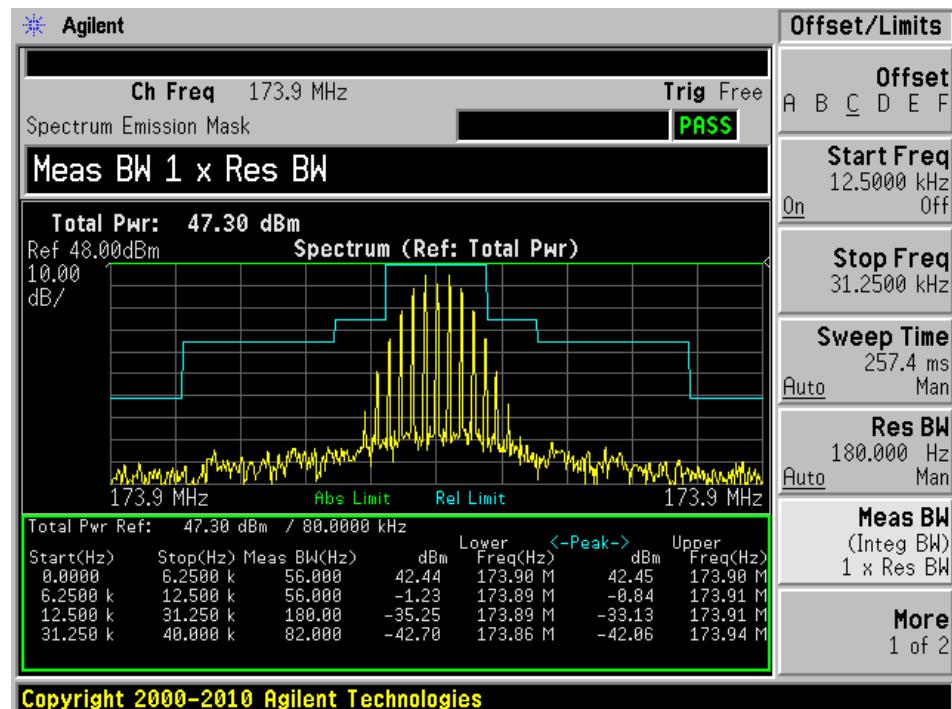


FM Data Modulation

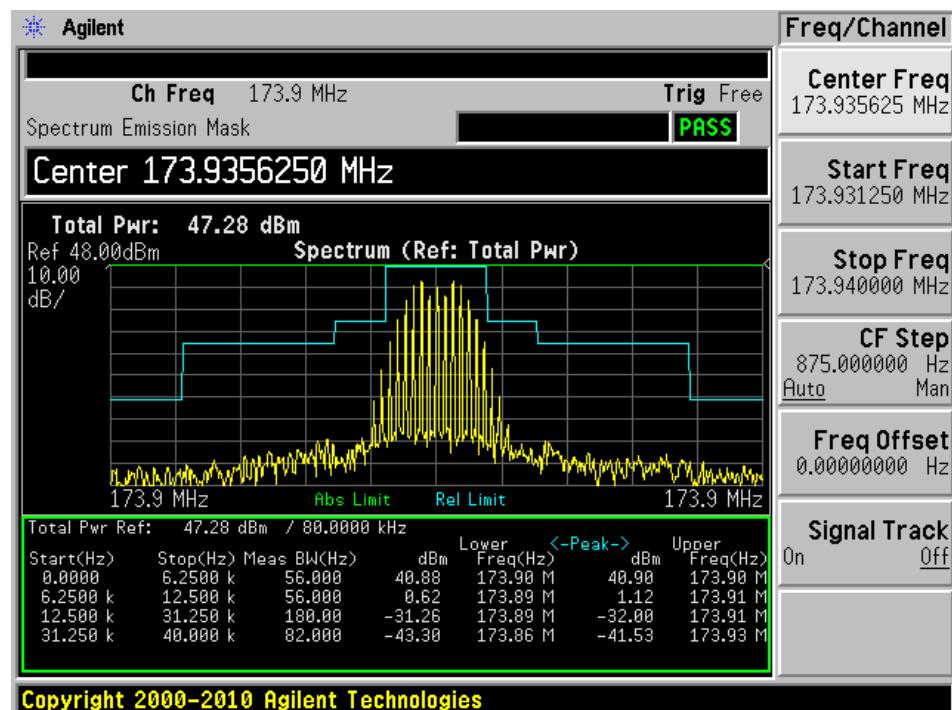


## 6.25 kHz Channel Spacing, Emission Mask B

Low Channel: 138.1 MHz

FM Voice Modulation

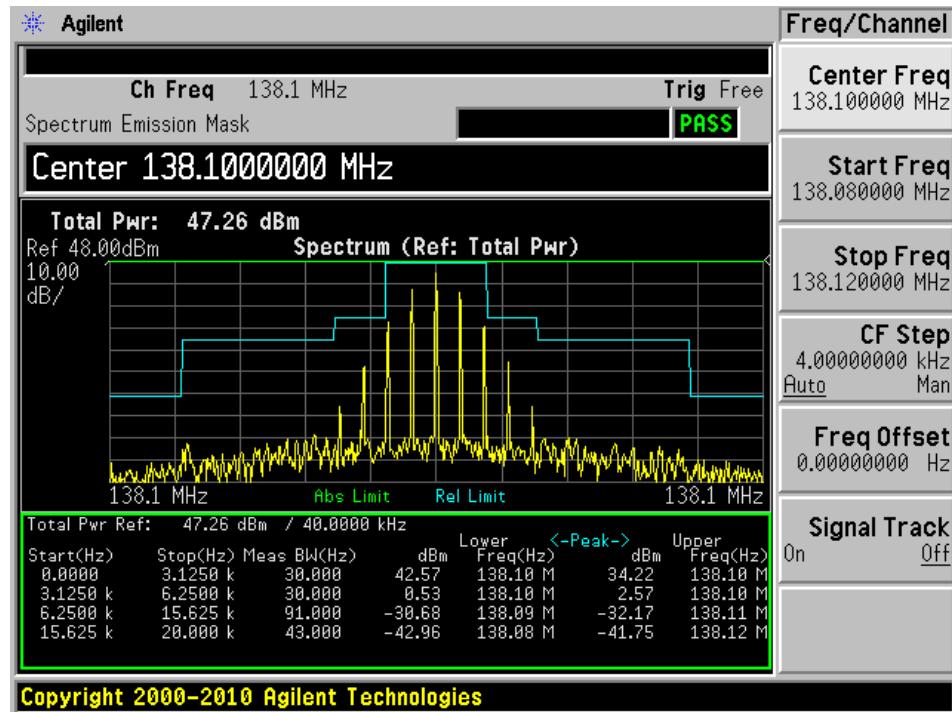


FM Data Modulation

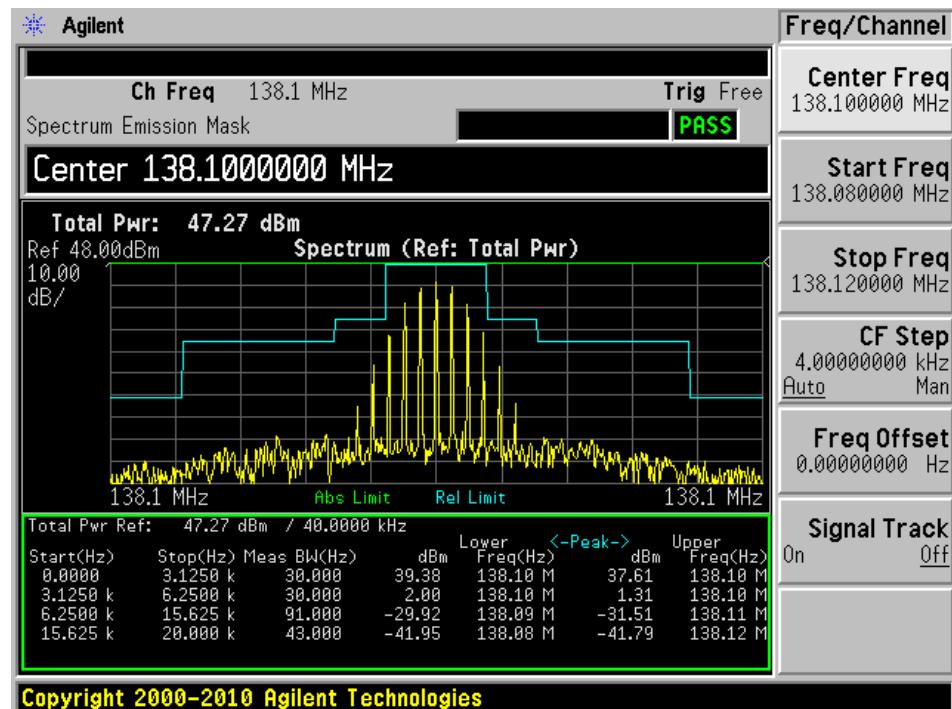


## Middle Channel: 156 MHz

FM Voice Modulation

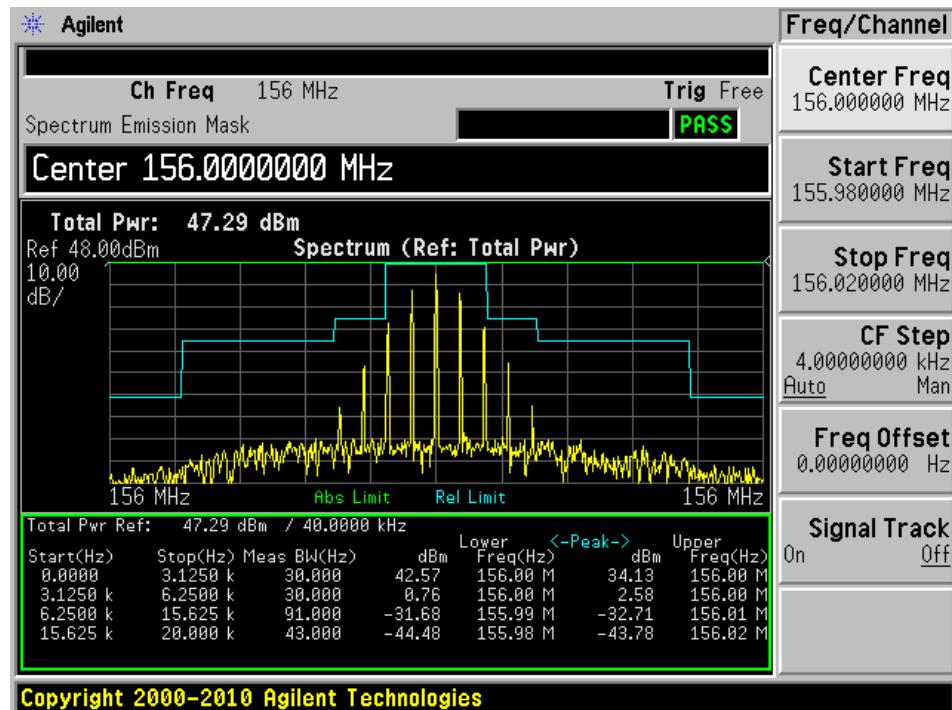


FM Data Modulation

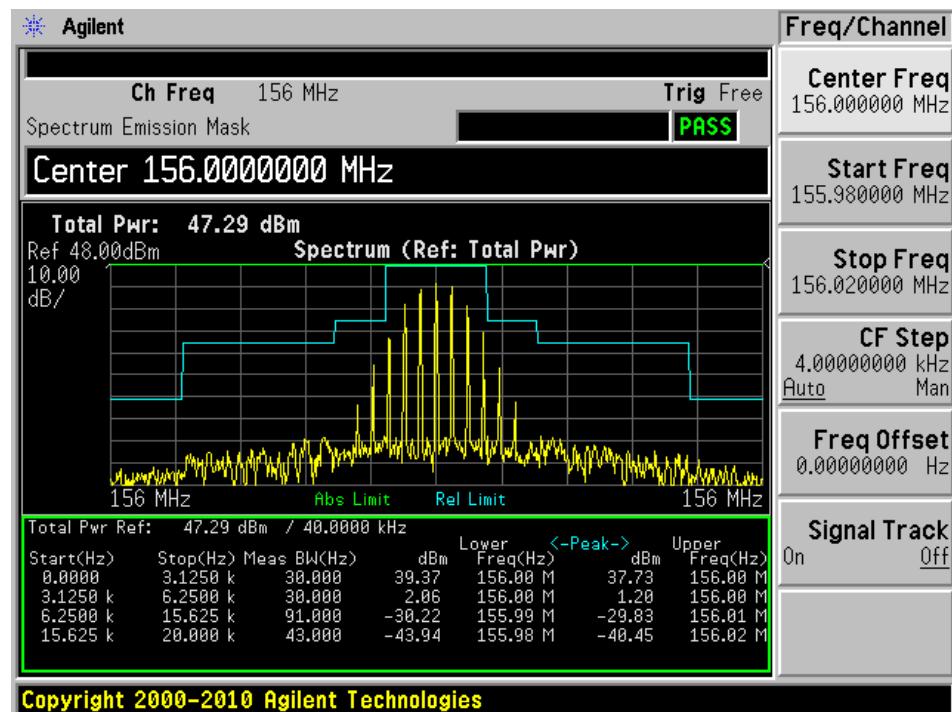


## High Channel: 173.9 MHz

FM Voice Modulation

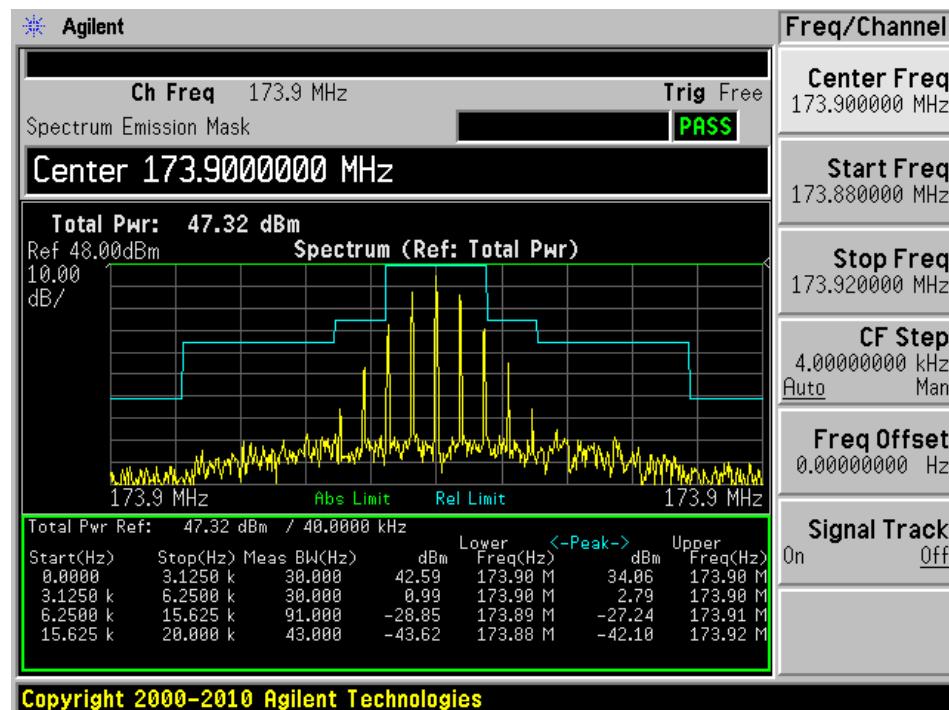


## FM Data Modulation

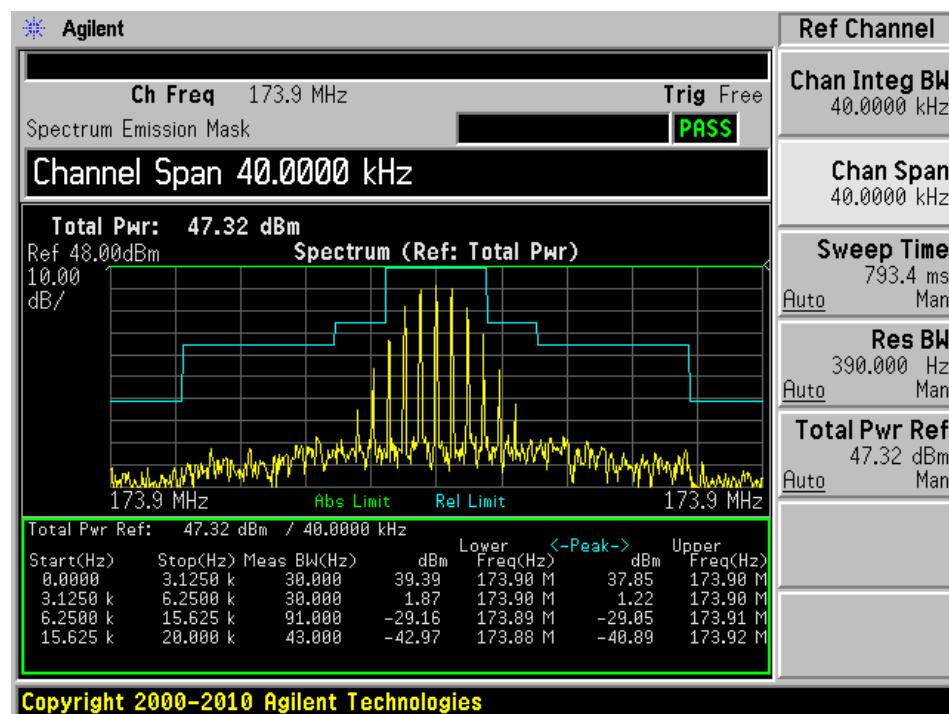


## 12.5 kHz Channel Spacing, Emission Mask C

Low Channel: 138.1 MHz

FM Voice Modulation

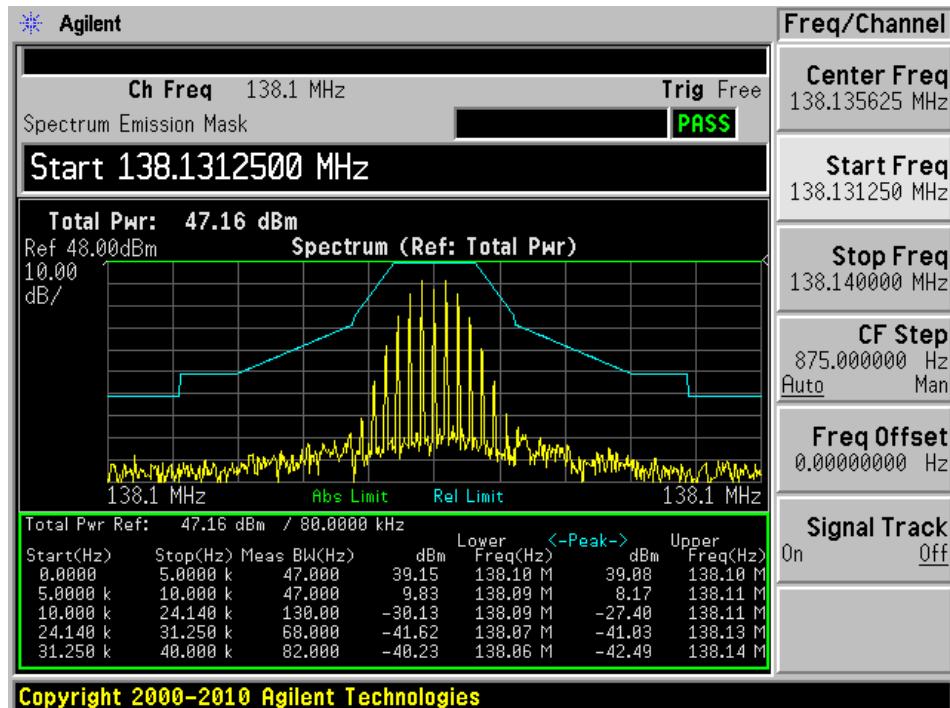


FM Data Modulation

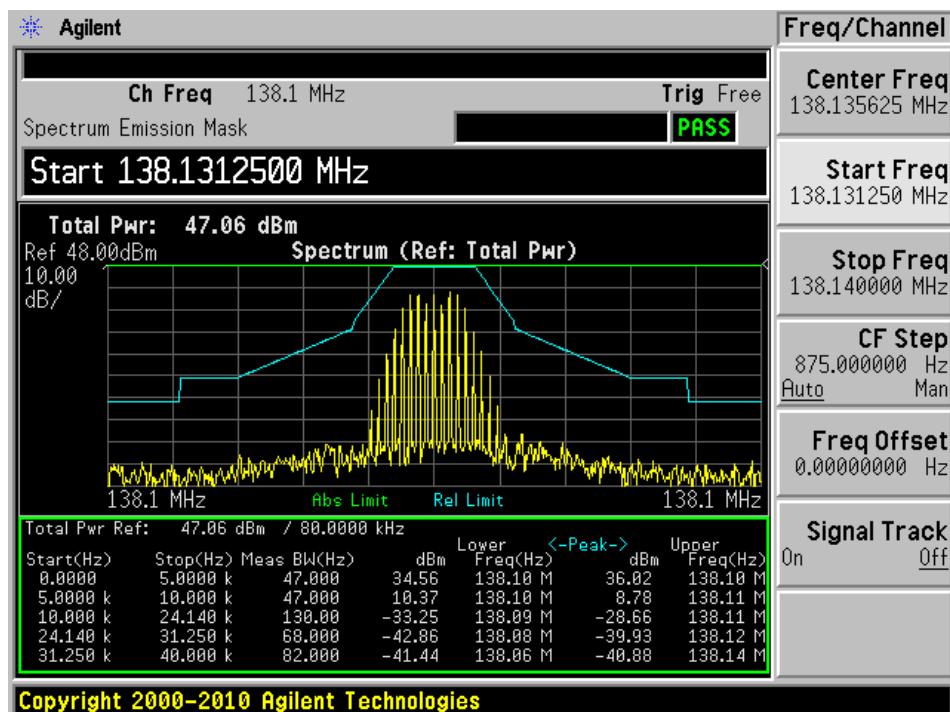


## Middle Channel: 156 MHz

FM Voice Modulation

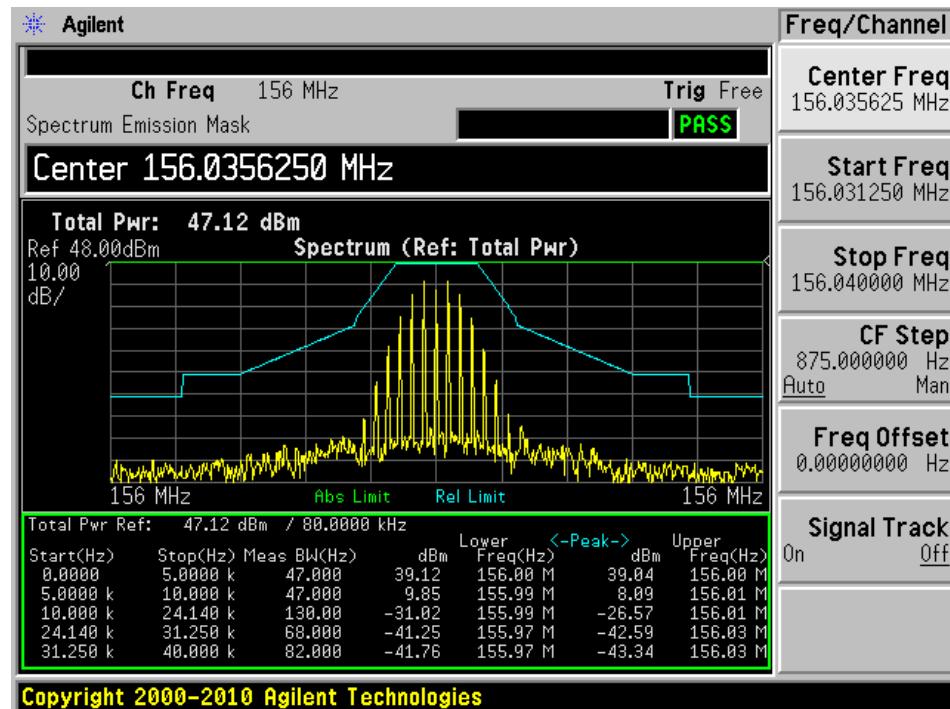


FM Data Modulation

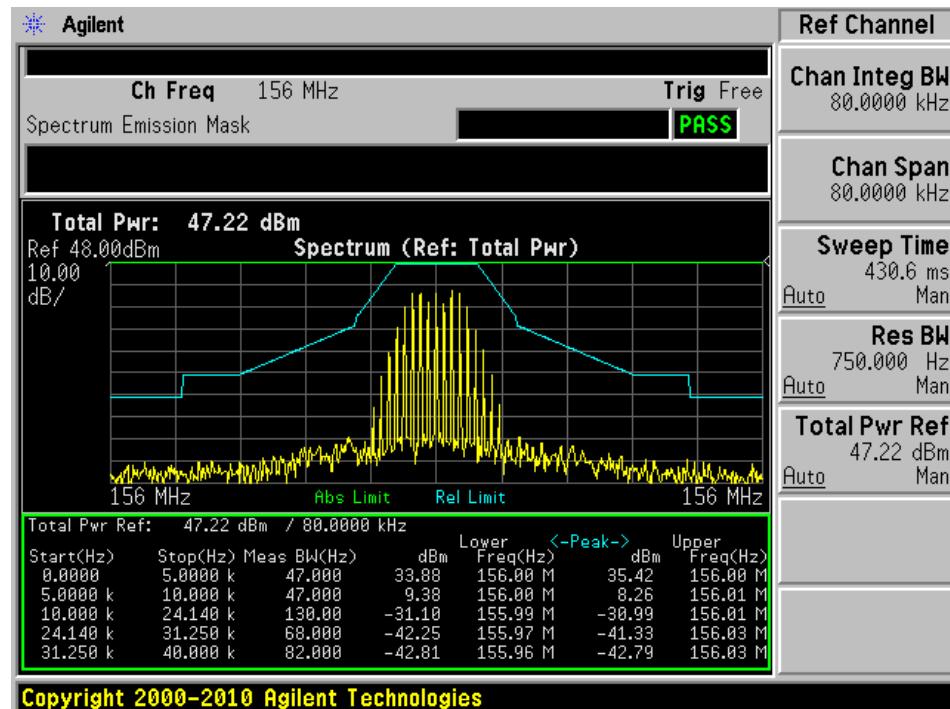


## High Channel: 173.9 MHz

FM Voice Modulation

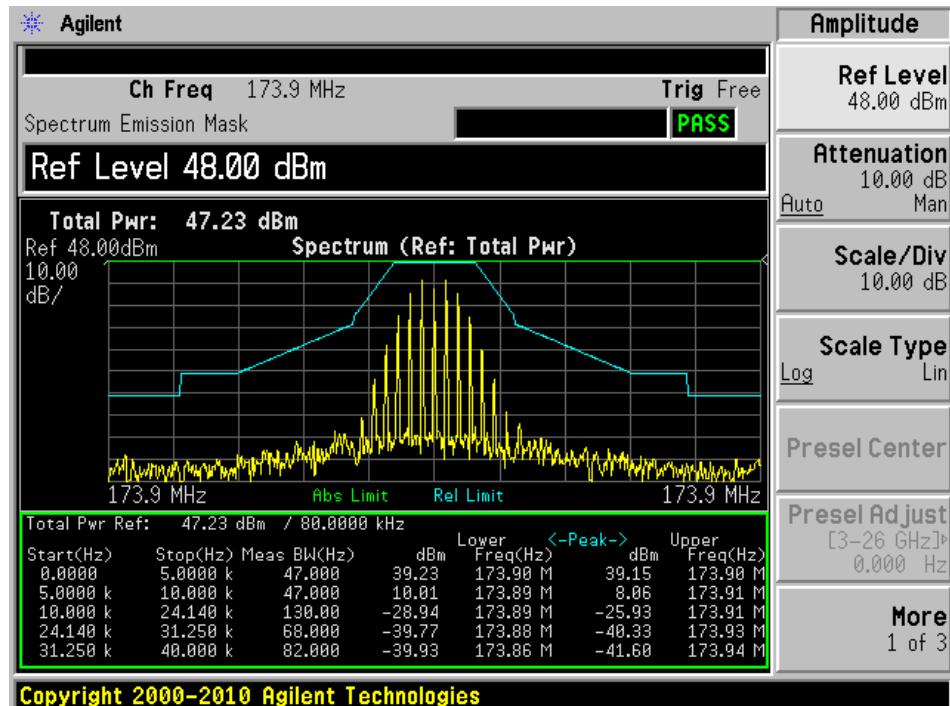


FM data Modulation

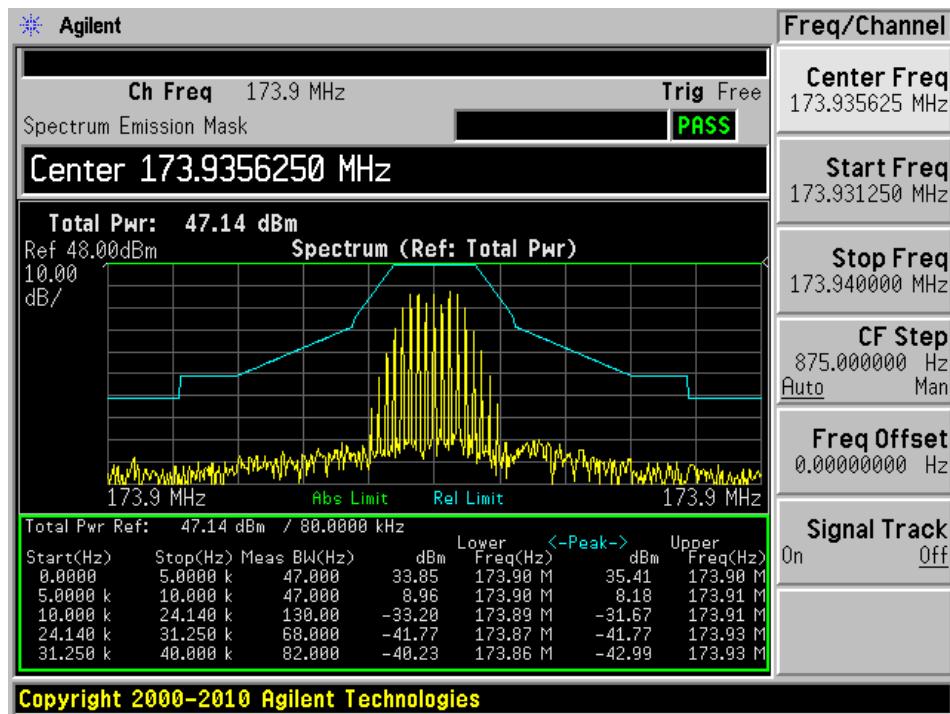


## 6.25 kHz Channel Spacing, Emission Mask C

Low Channel: 138.1 MHz

FM Voice Modulation

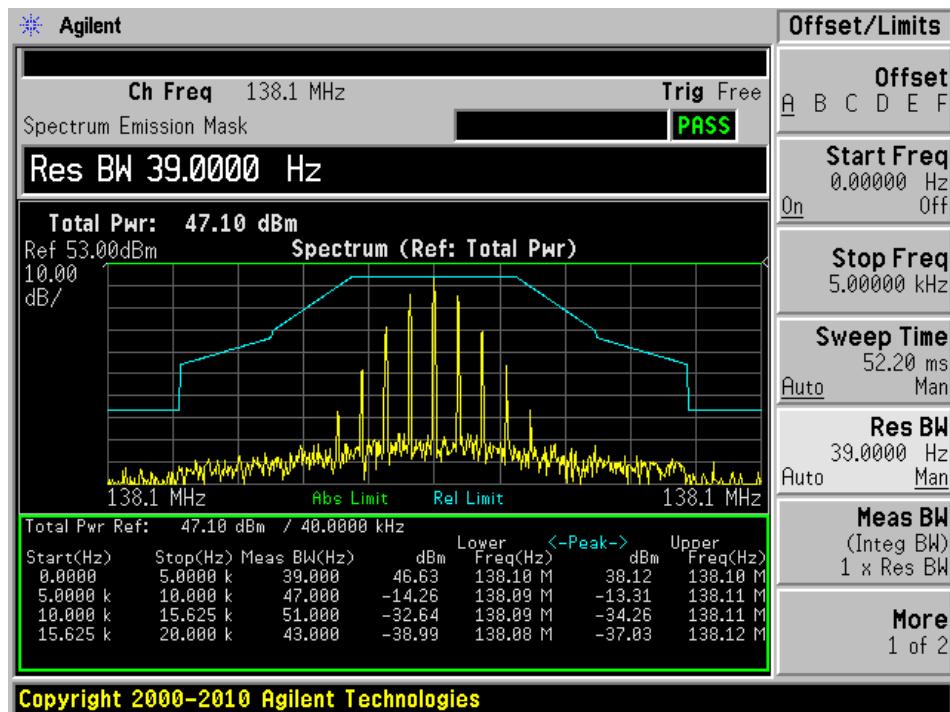


FM Data Modulation

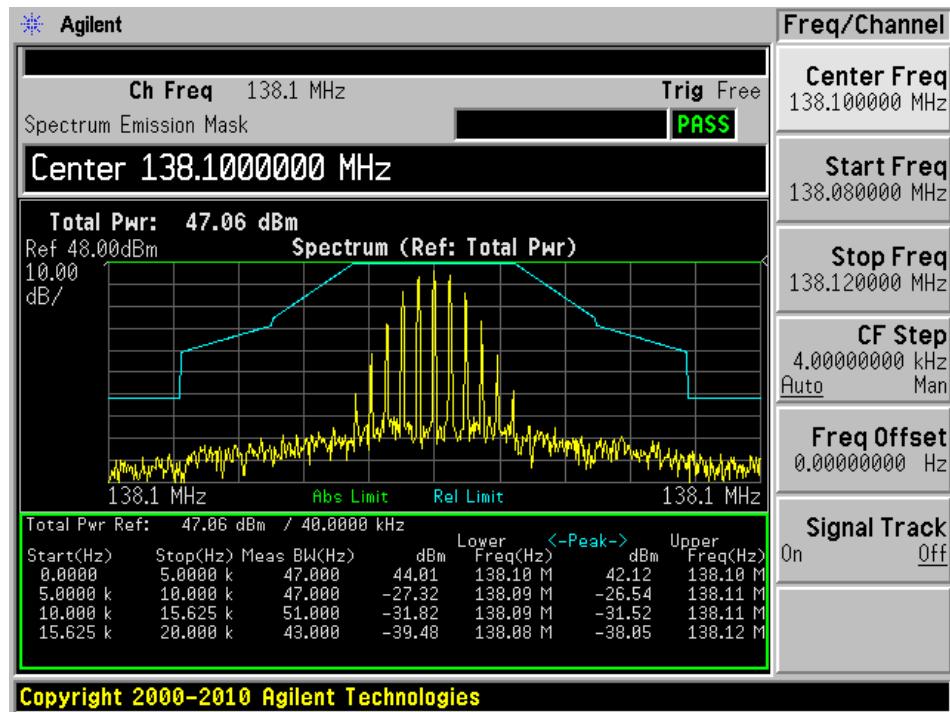


## Middle Channel: 156 MHz

## FM Voice Modulation

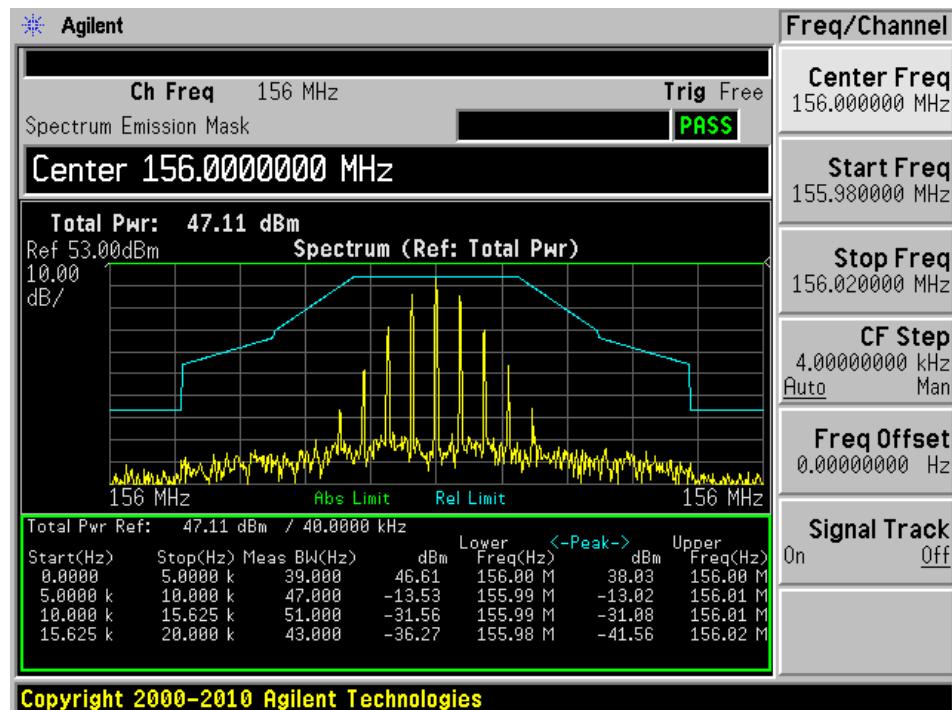


## FM Data Modulation

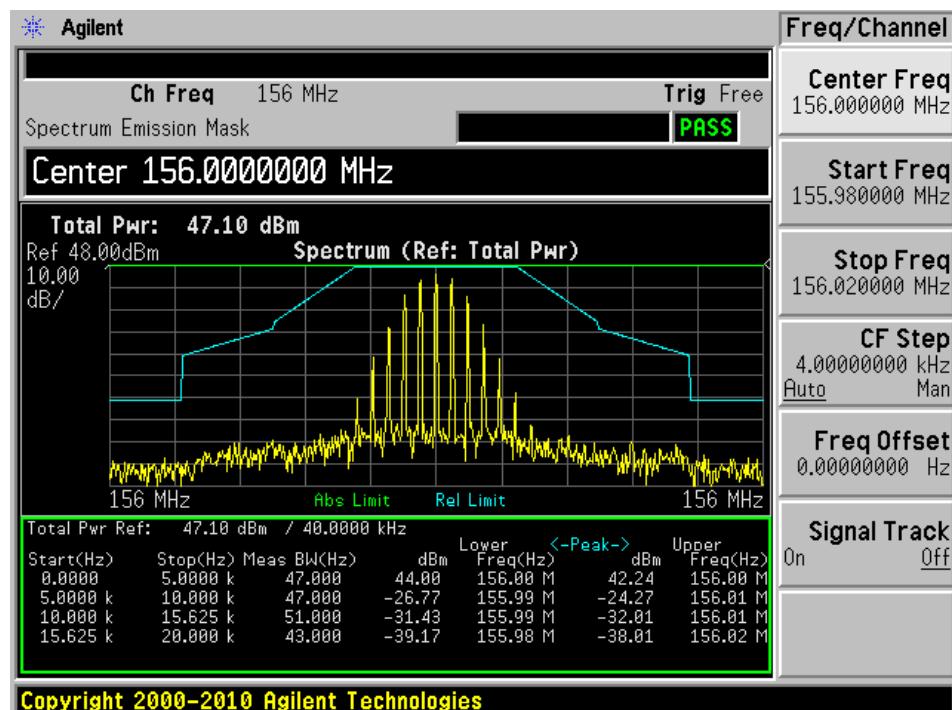


## High Channel: 173.9 MHz

## FM Voice Modulation

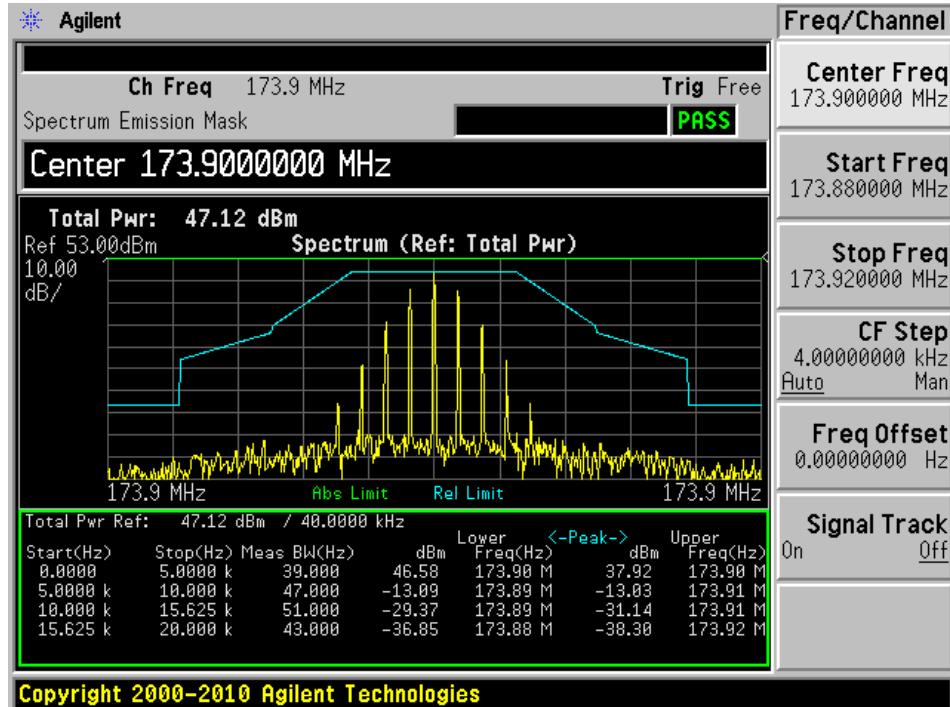


## FM Data Modulation

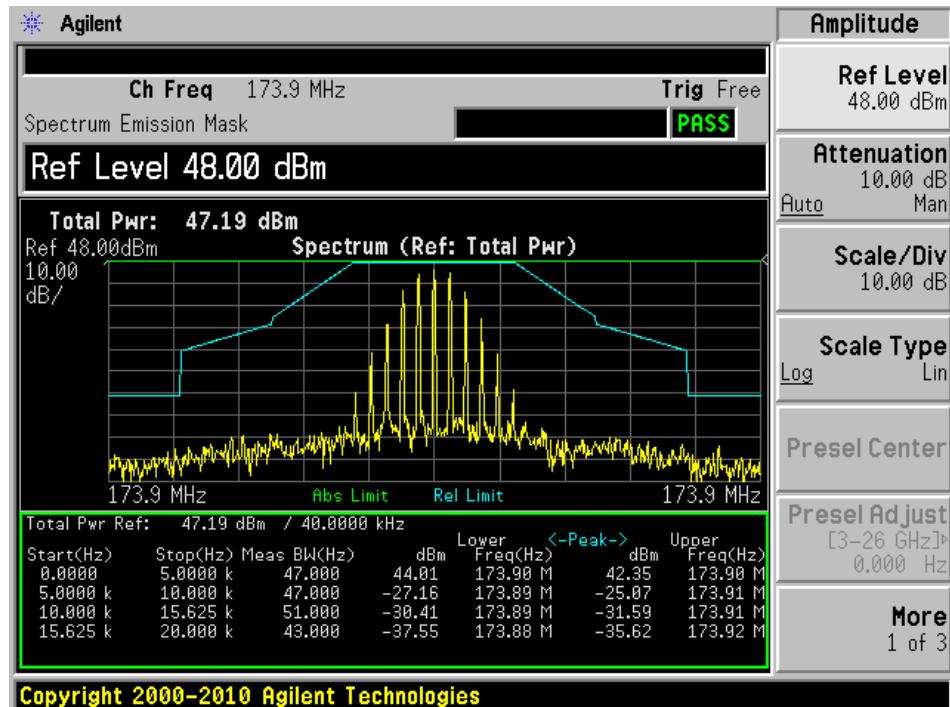


## 12.5 kHz Channel Spacing, Emission Mask D

Low Channel: 138.1 MHz

FM Voice Modulation

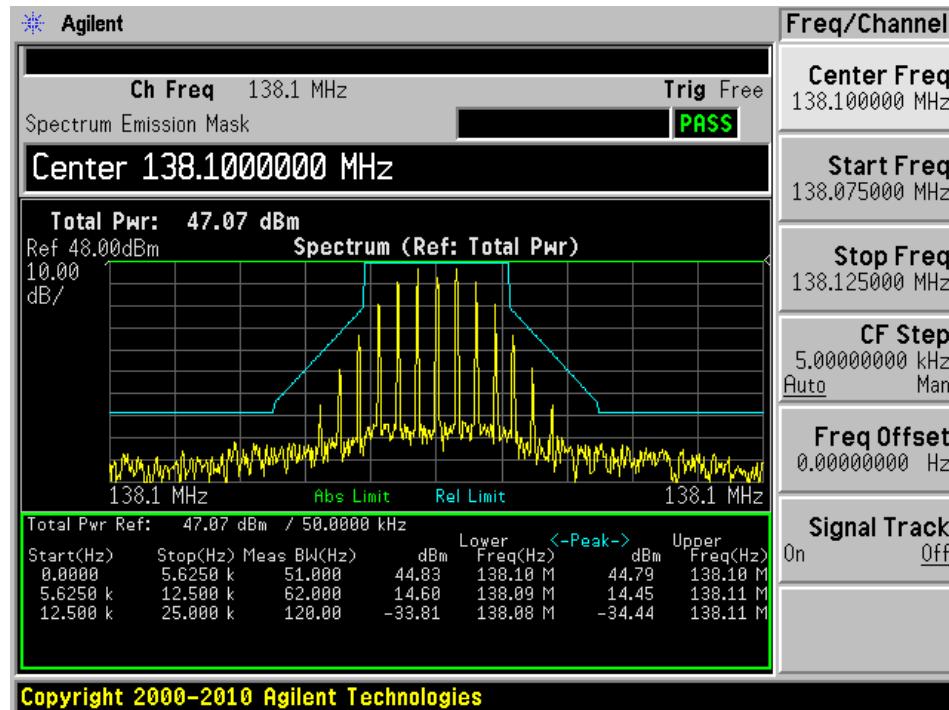


FM Data Modulation

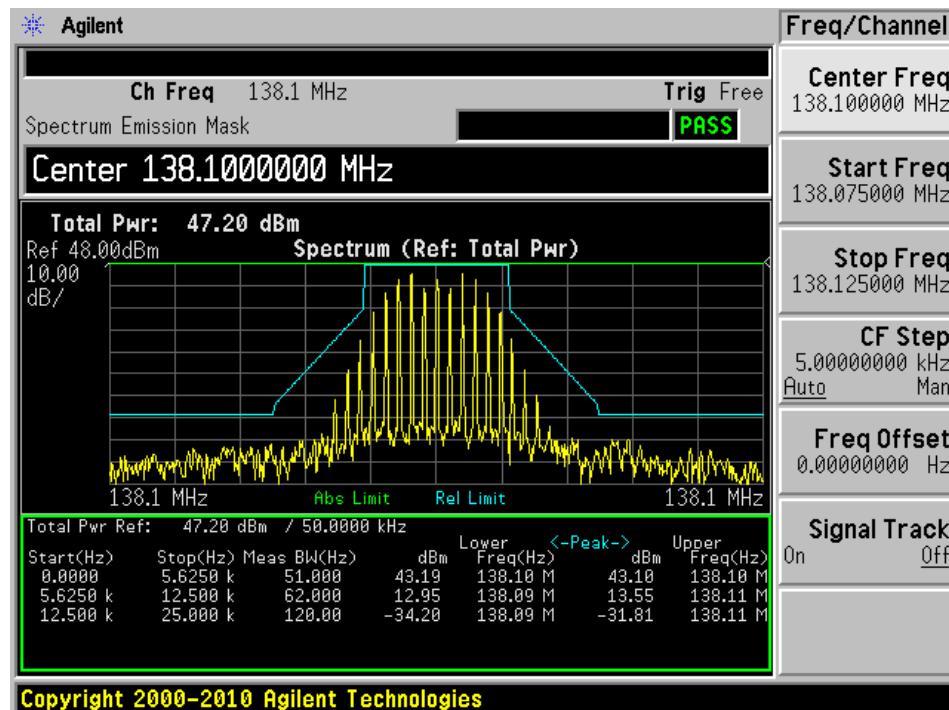


## Middle Channel: 156 MHz

## FM Voice Modulation

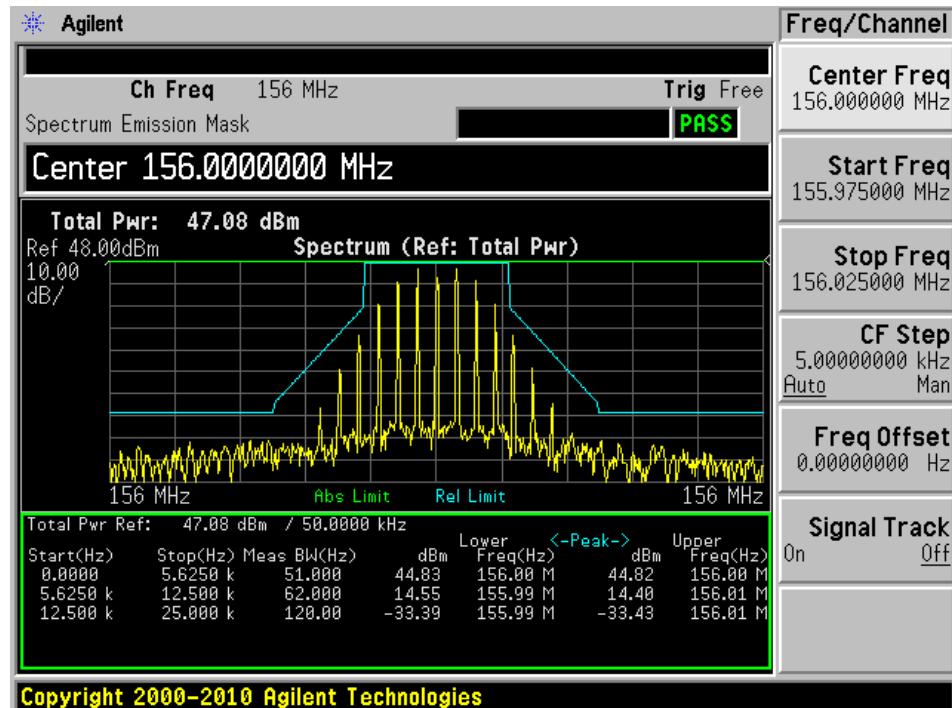


## FM Data Modulation

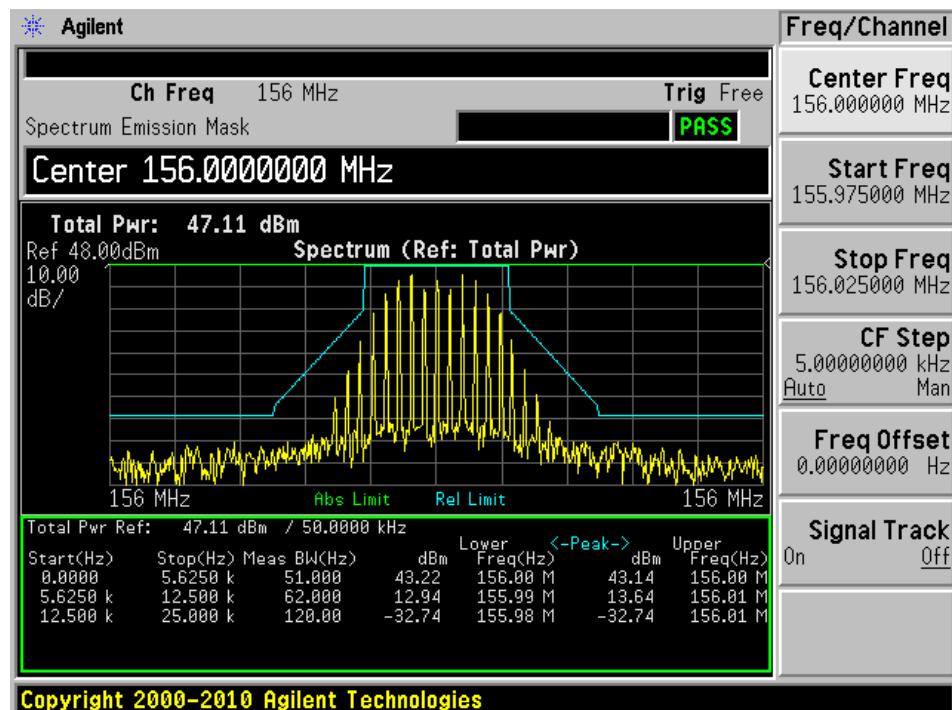


## High Channel: 173.9 MHz

FM Voice Modulation

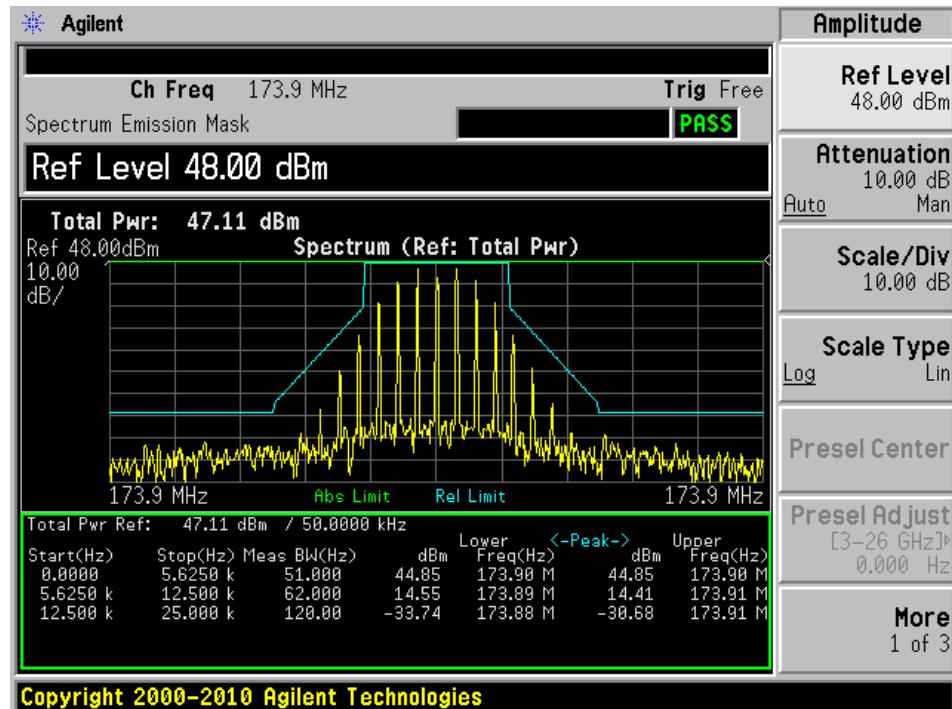


FM Data Modulation

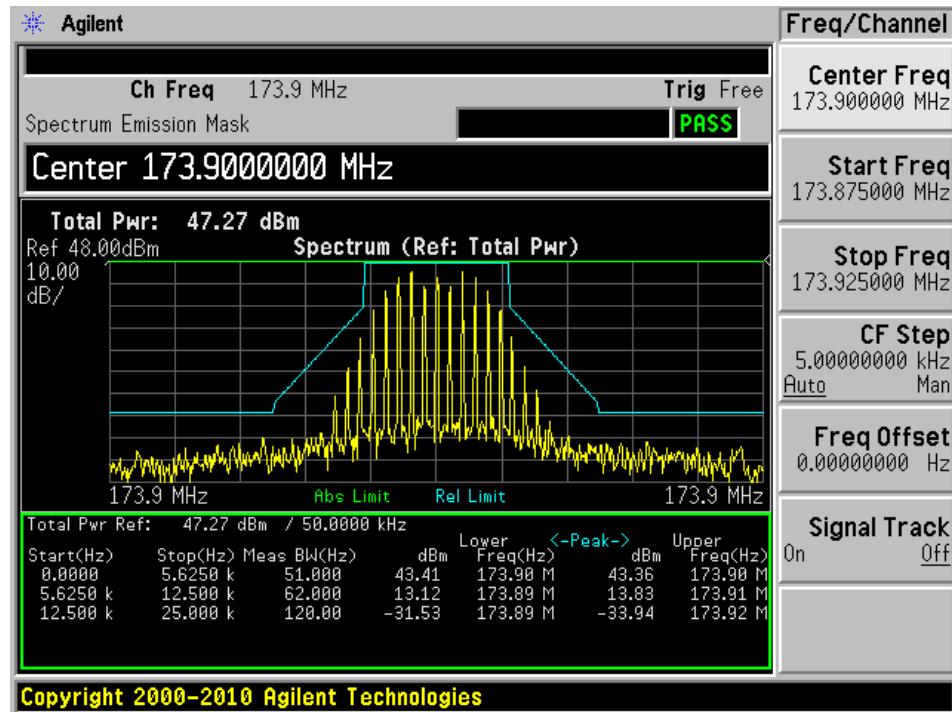


## 6.25 kHz Channel Spacing, Emission Mask E

Low Channel: 138.1 MHz

FM Voice Modulation

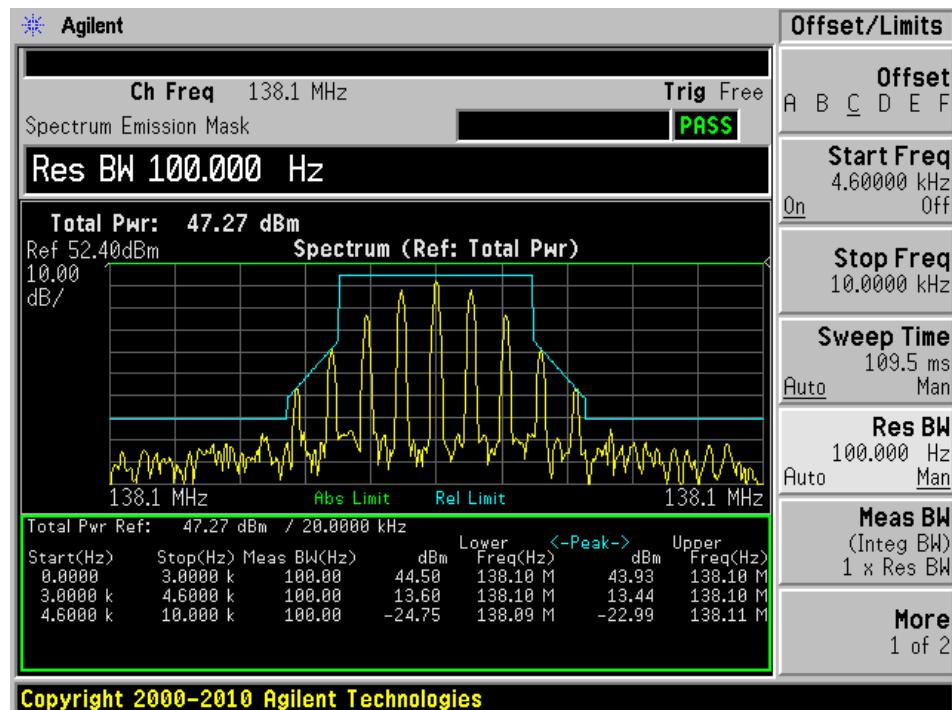


FM Data Modulation

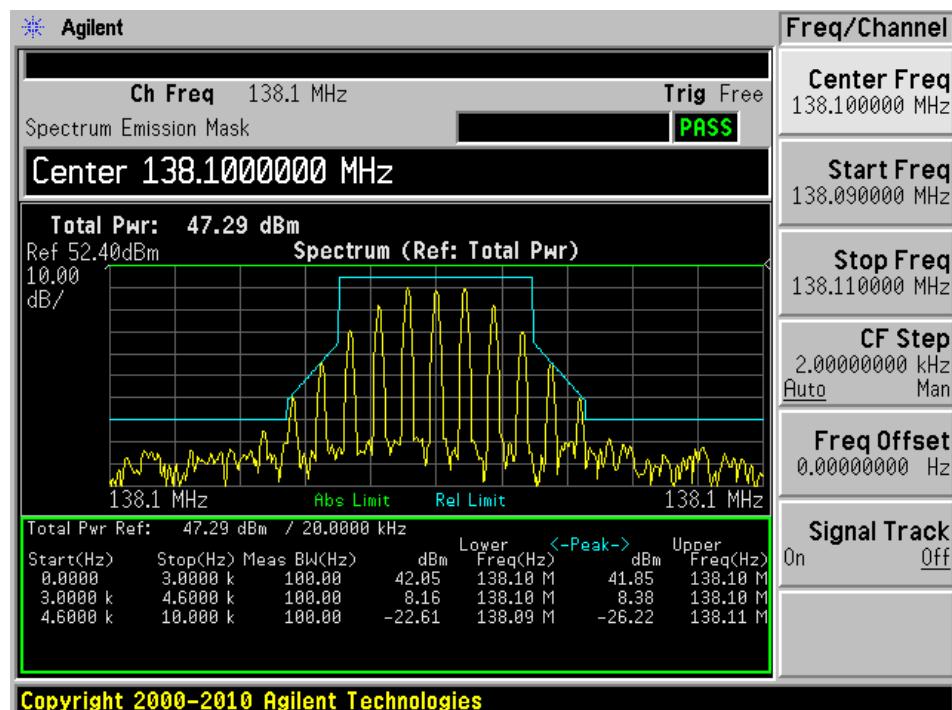


## Middle Channel: 156 MHz

FM Voice Modulation

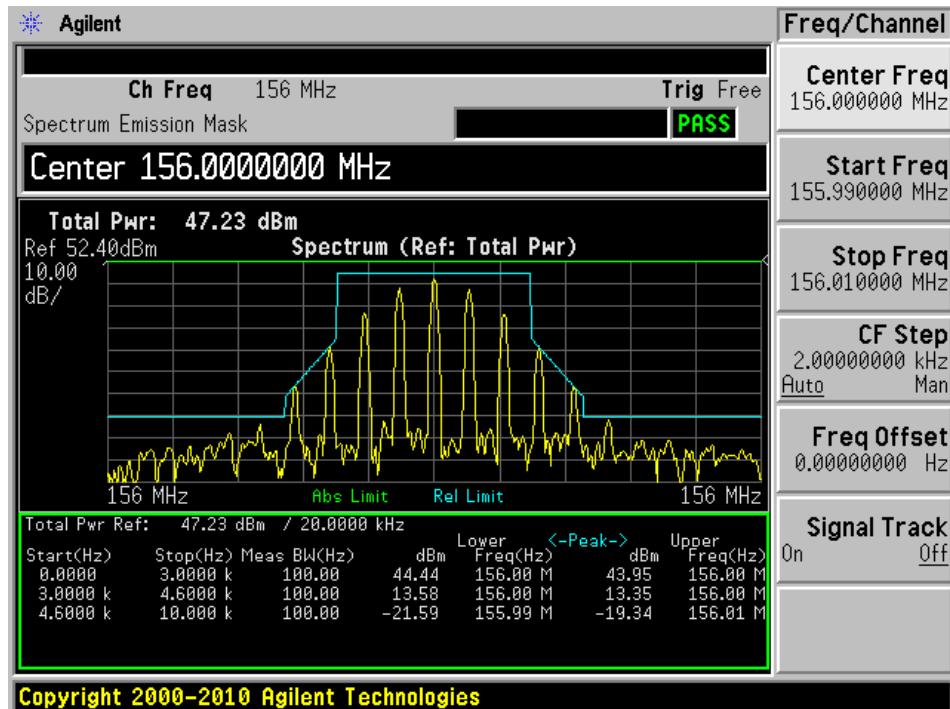


FM Data Modulation

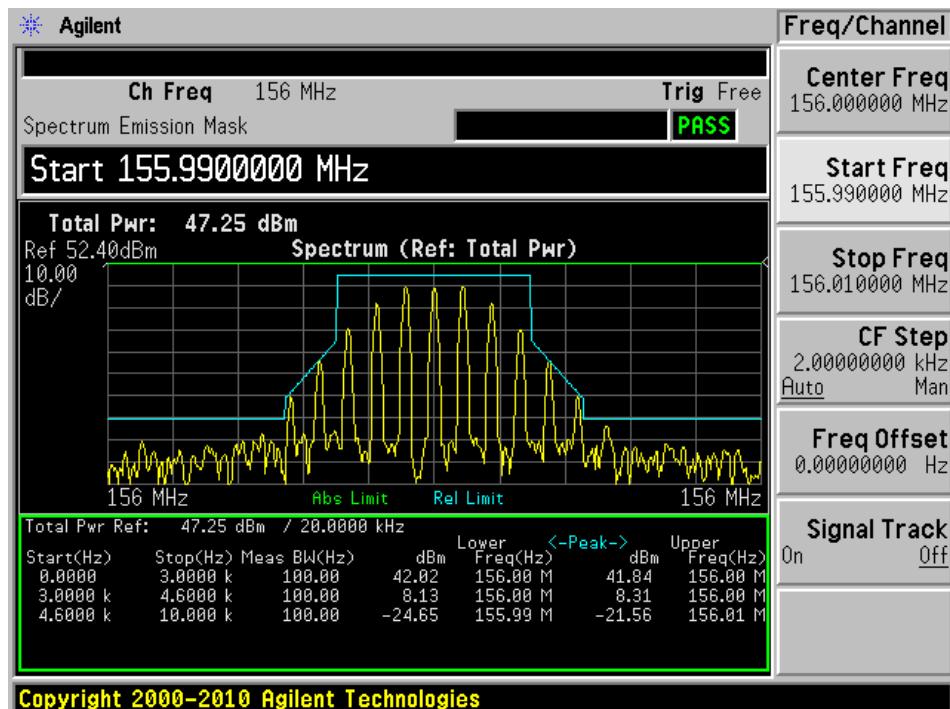


## High Channel: 173.9 MHz

FM Voice Modulation

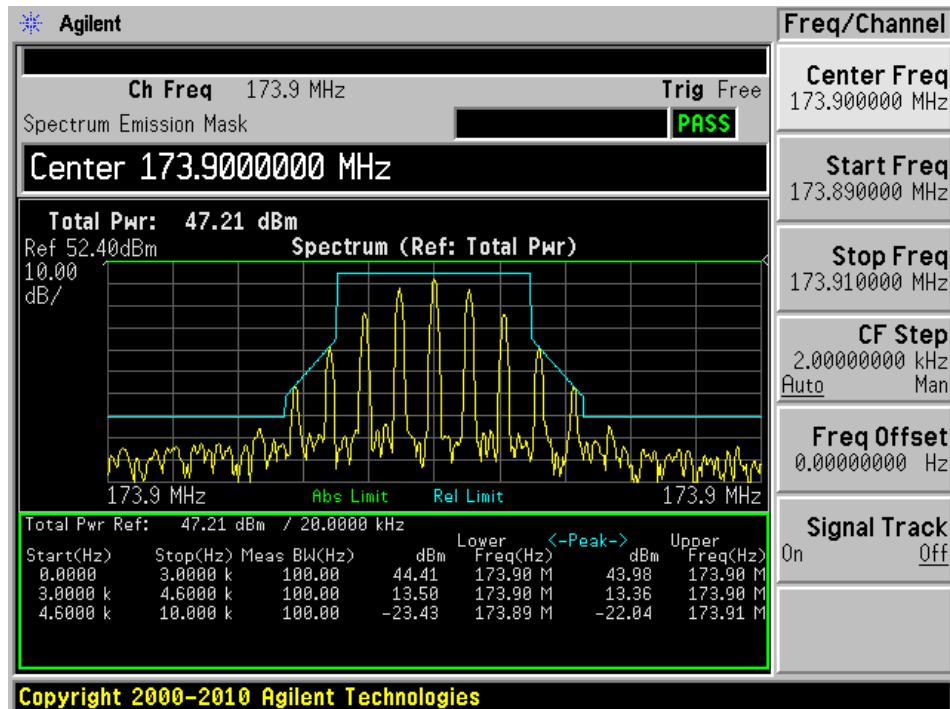

FM data Modulation

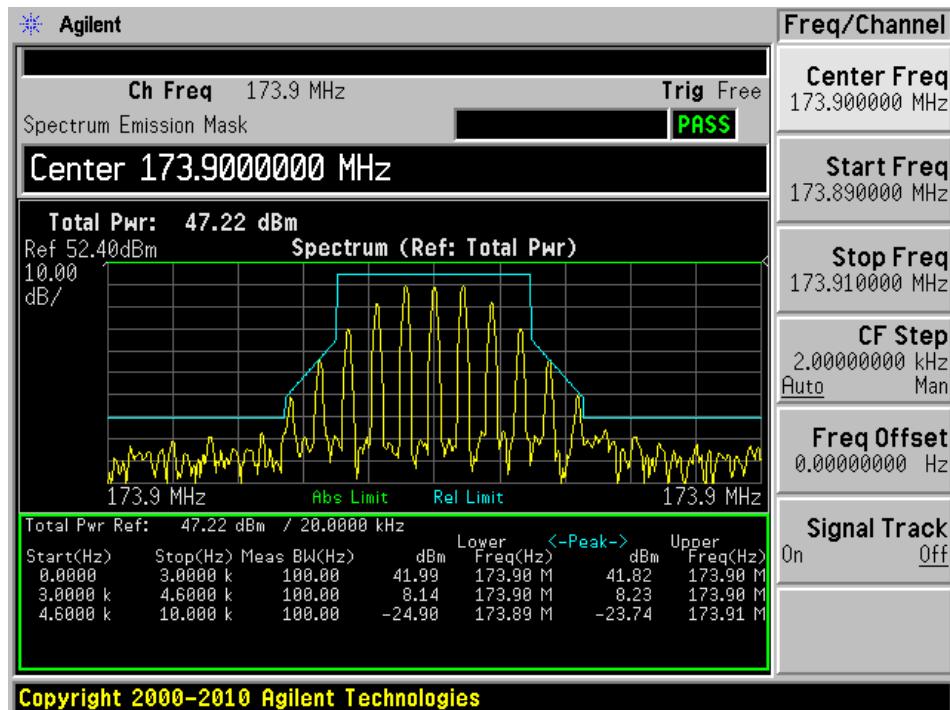

## 6 FCC §2.1051 & §90.210 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS

### 6.1 Applicable Standard

§90.210 (12.5 kHz bandwidth only)


On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 12.5 kHz at least:

$50 + 10 \log P$  or 70 dB

### 6.2 Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz. Sufficient scans were taken to show any out of band emissions up to 10<sup>th</sup> harmonic.

### 6.3 Test Setup Block Diagram

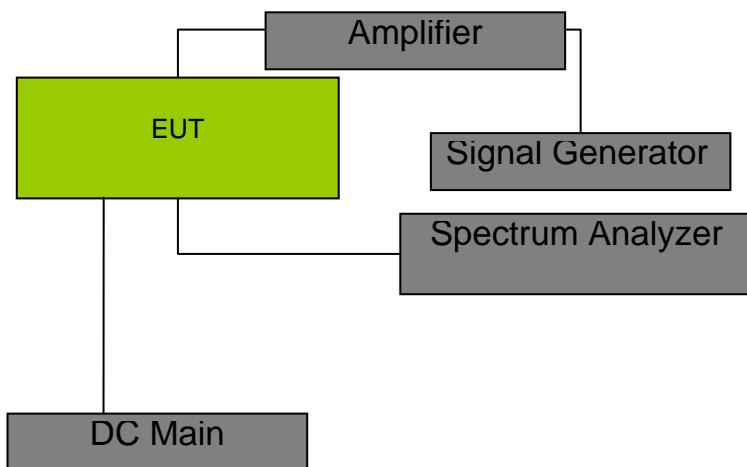

## 6.4 Test Equipment List and Details

Manufacturers	Descriptions	Models	Serial Numbers	Calibration Dates	Calibration Interval
Agilent	Spectrum Analyzer	E4440A	MY44303352	2012-05-10	1 year
HP	Signal Generator	8648C	3426A00417	2012-09-17	1 year
Agilent	Signal Generator	E4438C	MY45091309	2012-05-03	1 year
IFI	Wideband Amplifier	CMX5001	2194-1296	N/R	N/R

**Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

## 6.5 Test Environmental Conditions

Temperature:	22-24°C
Relative Humidity:	50-55 %
ATM Pressure:	101-102kPa


The testing was performed by Wei Sun on 2012-09-19 on RF Site.

## 6.6 Test Results


Please refer to the plot hereinafter.

**Middle Channel: 156 MHz (Worst Case: CW Signal)**


Plot 1: 30 MHz to 300 MHz

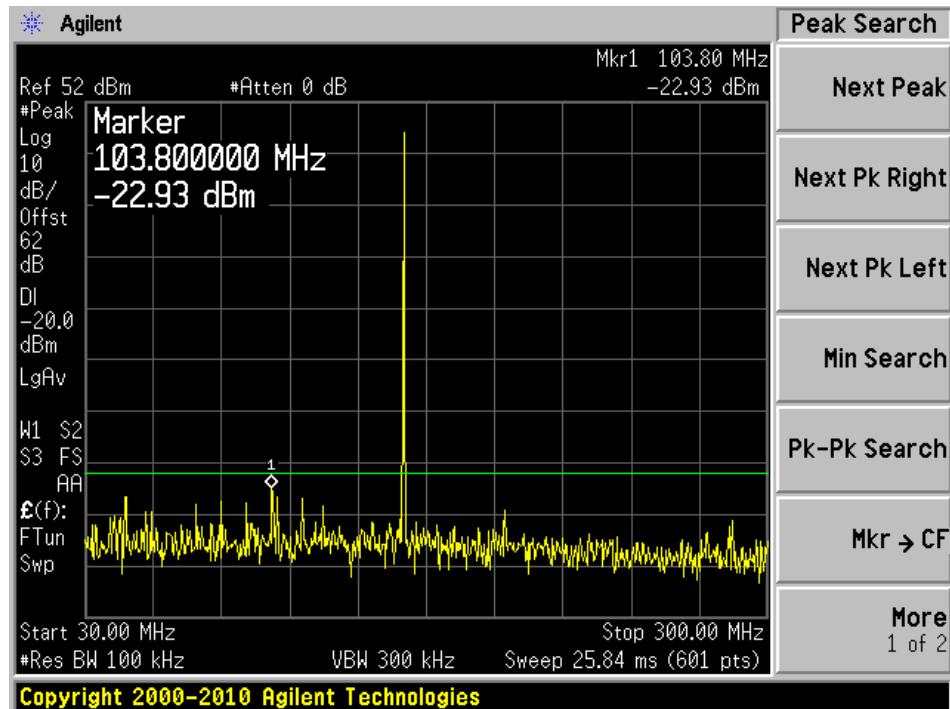


Plot 2: 300 MHz - 1 GHz

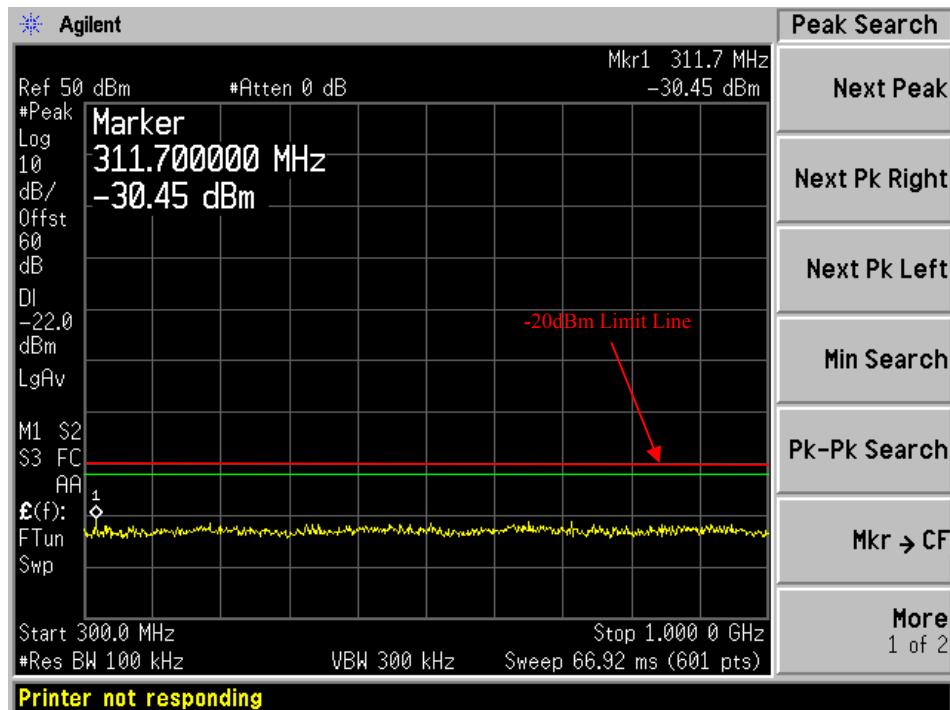


Plot 3: above 1 GHz


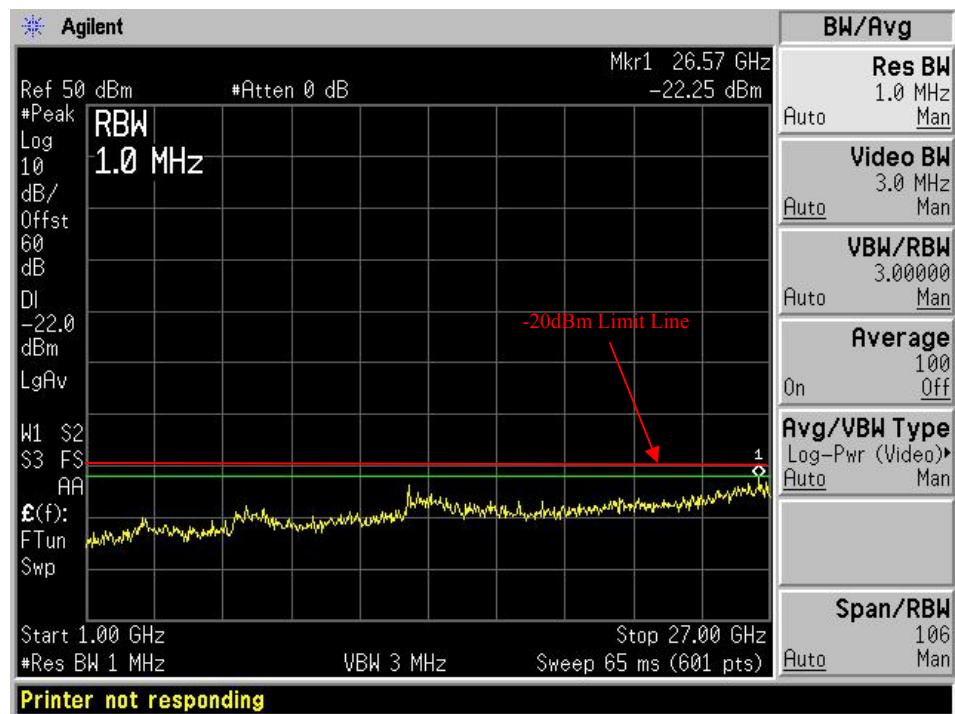


## Inter-modulation, Two Tones, Low Channel, Input

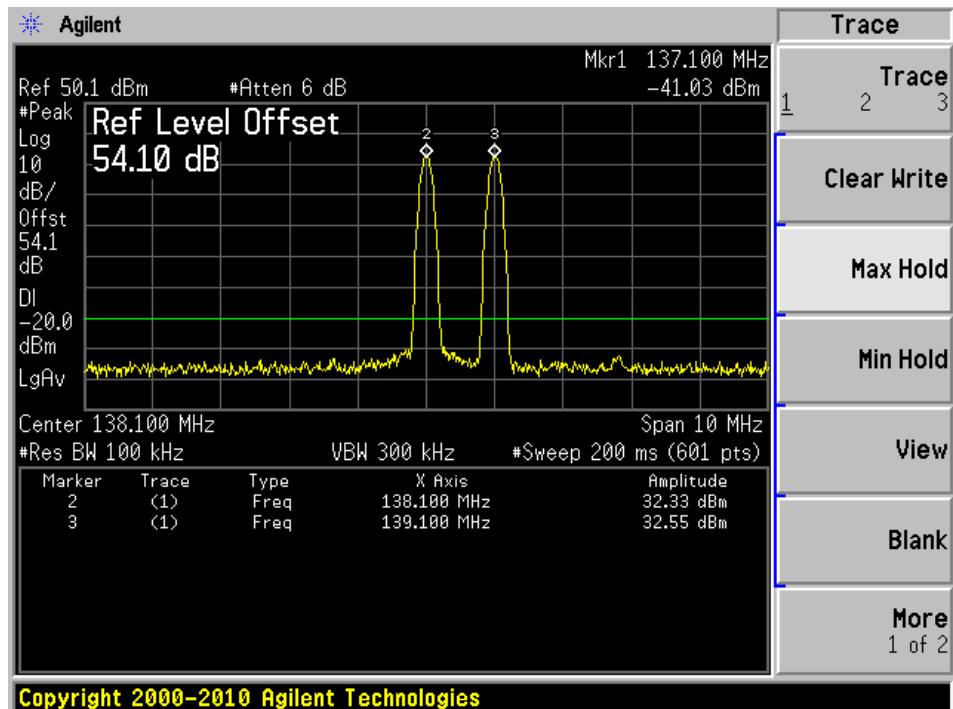


## Inter-modulation, Two Tones, Low Channel, Output

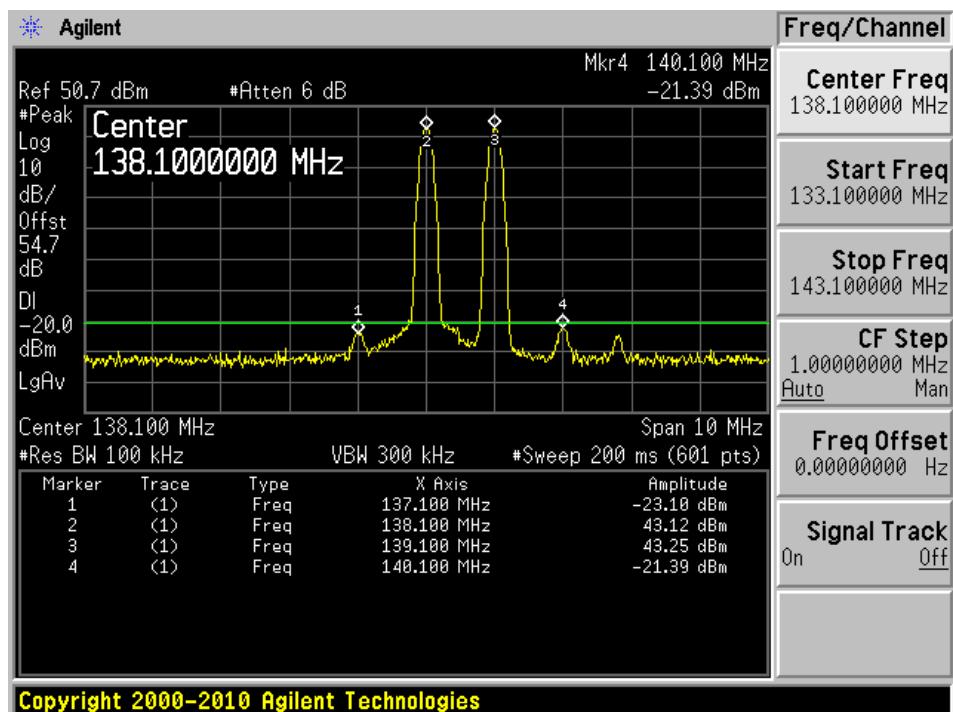


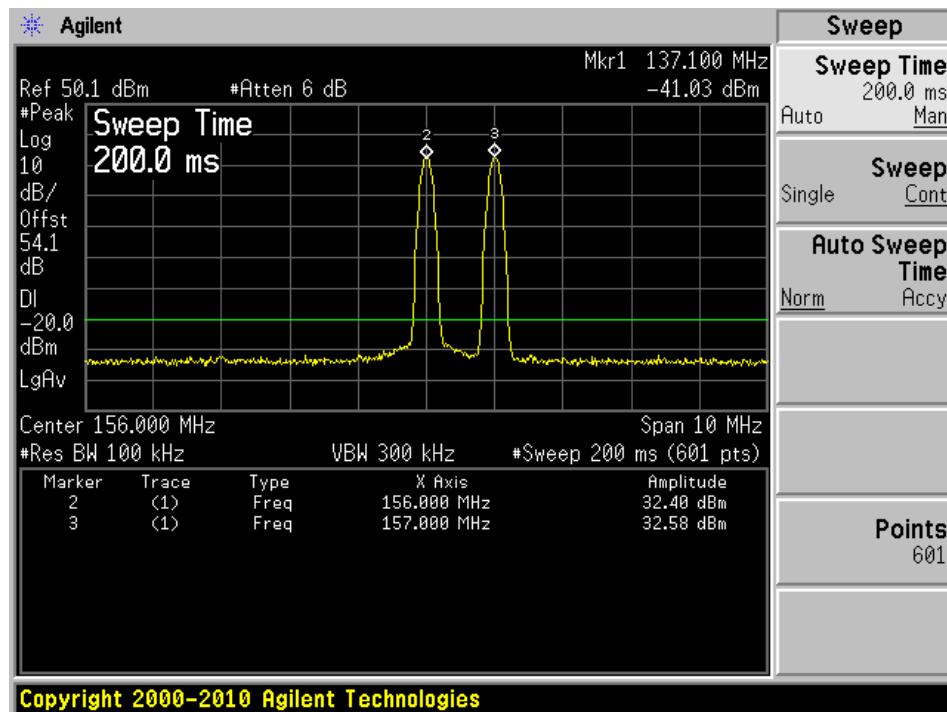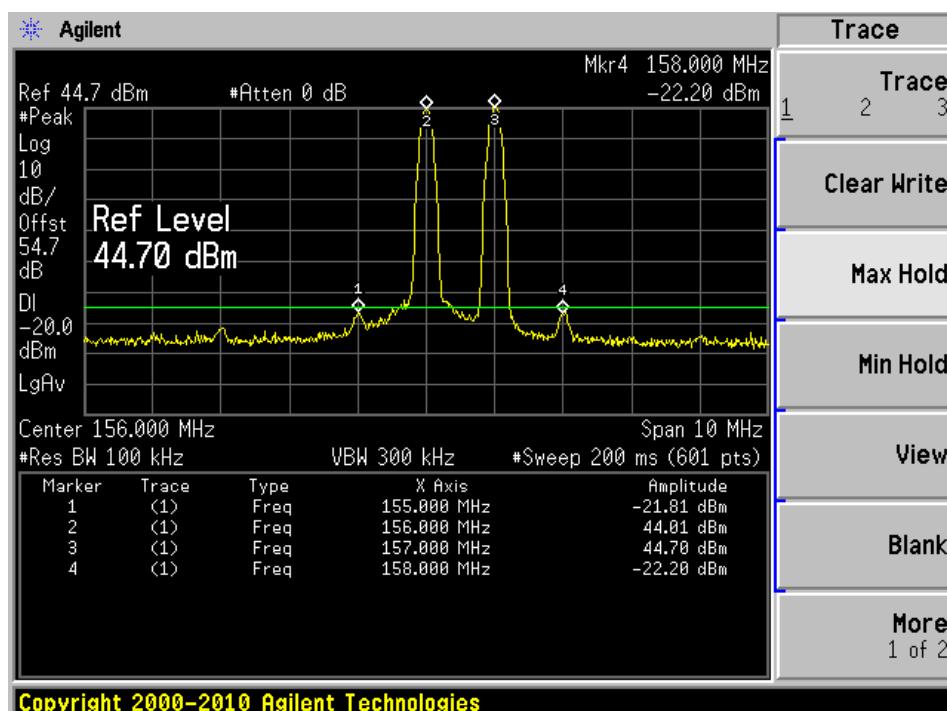**Inter-modulation, Two Tones, Middle Channel, Input****Inter-modulation, Two Tones, Middle Channel, Output**


## Inter-modulation, Two Tones, High Channel, Input

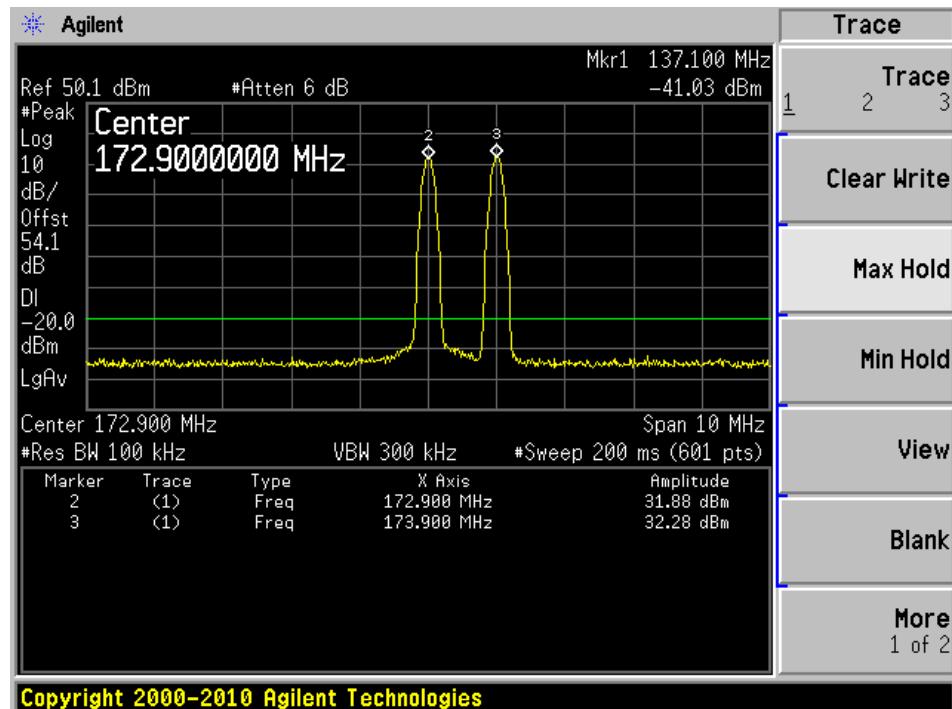


## Inter-modulation, Two Tones, High Channel, Output

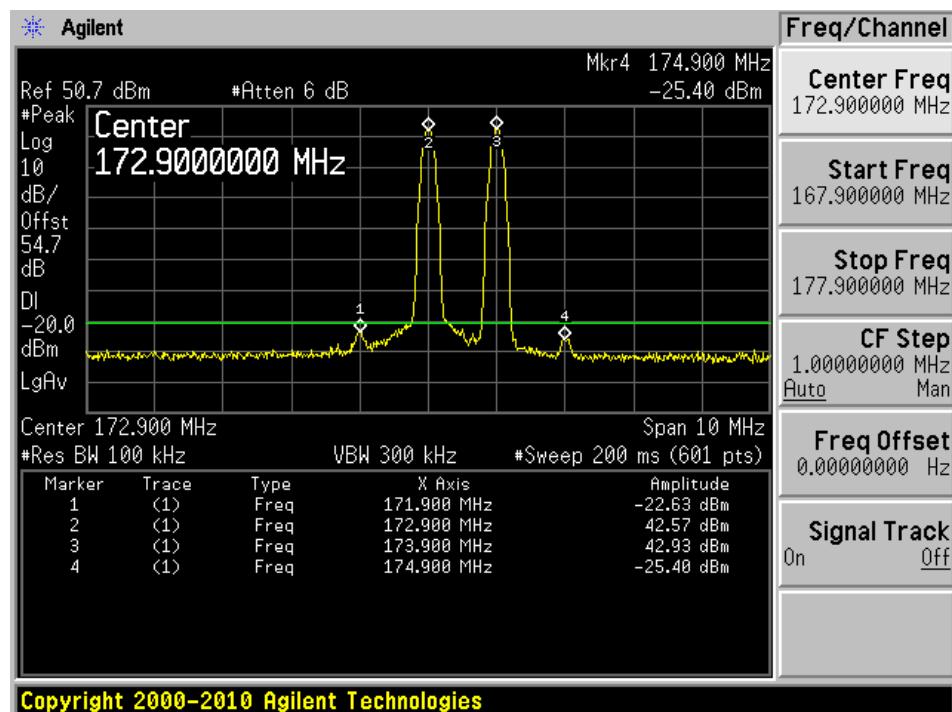


## Inter-modulation, Three Tones, Low Channel, Input

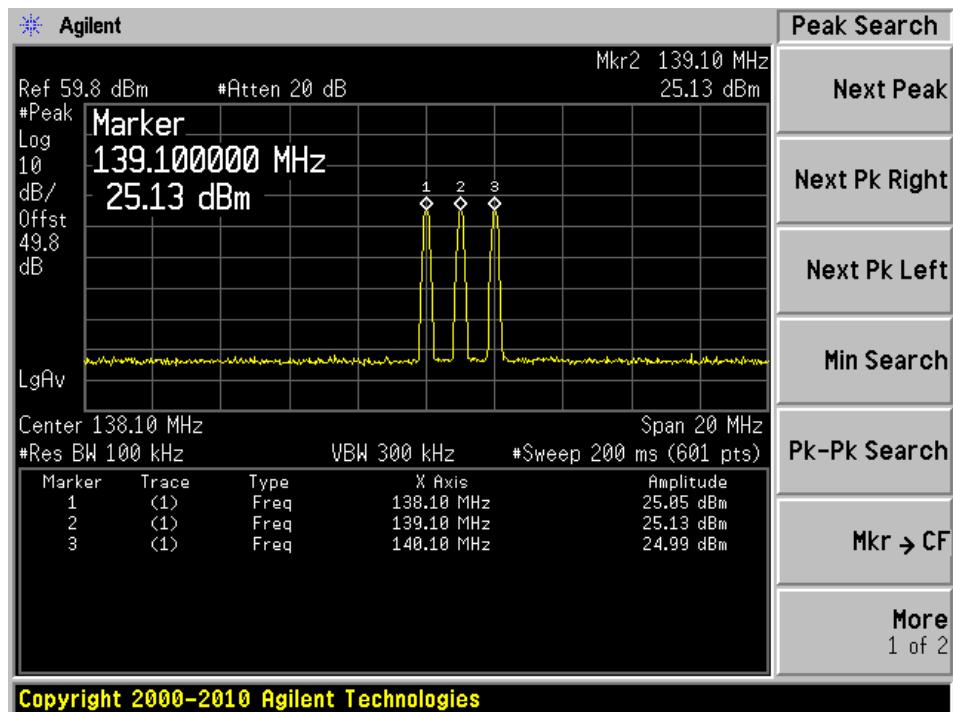


## Inter-modulation, Three Tones, Low Channel, Output (1)

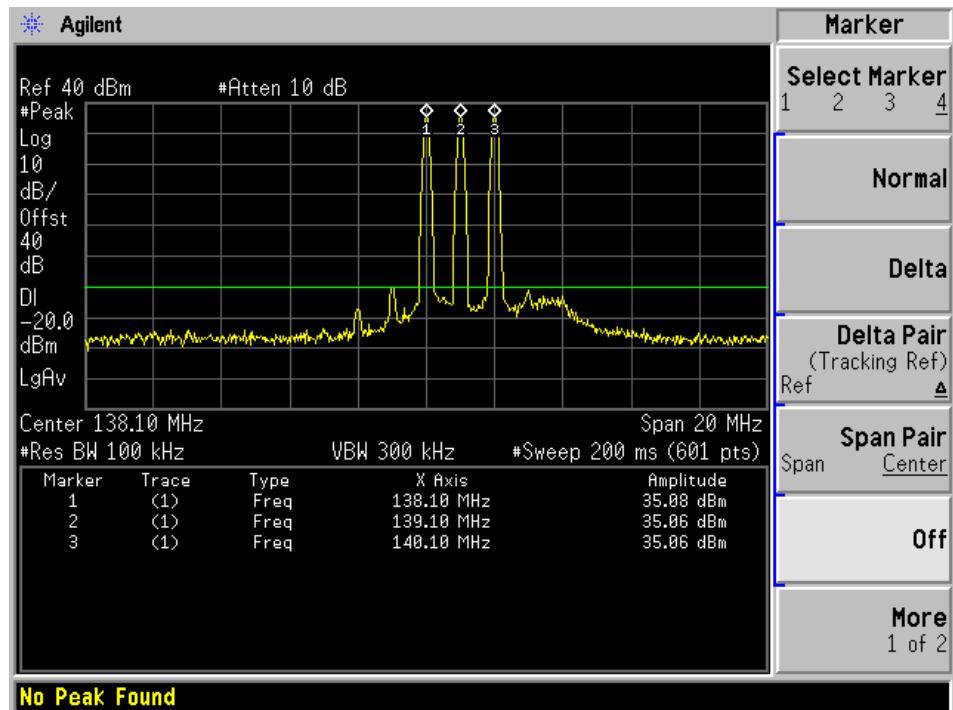


## Inter-modulation, Three Tones, Low Channel, Output (2)

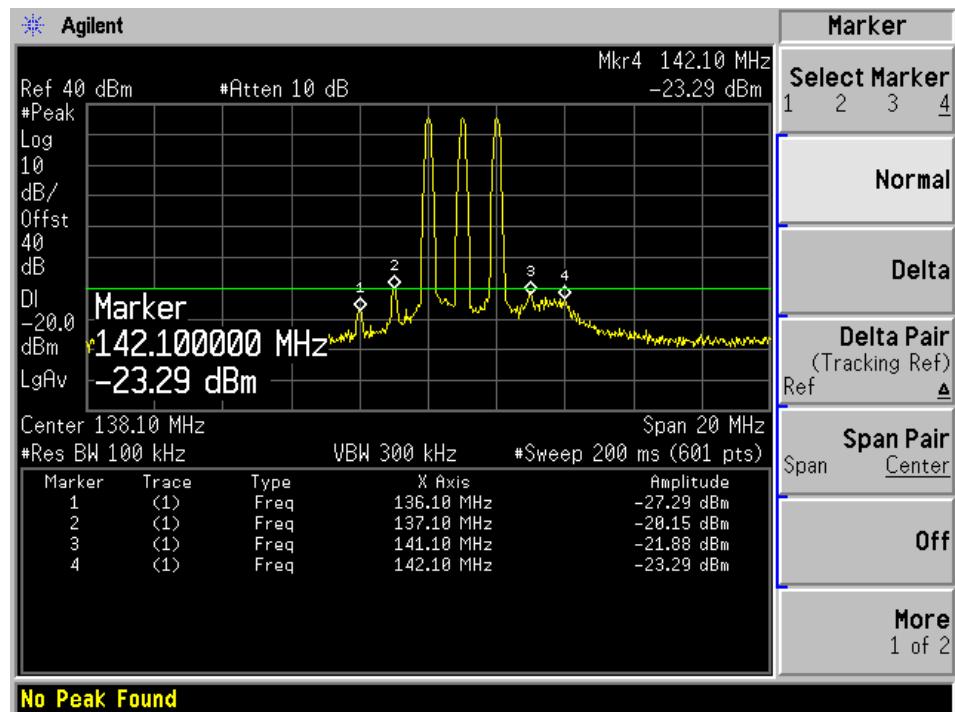


## Inter-modulation, Three Tones, Middle Channel, Input

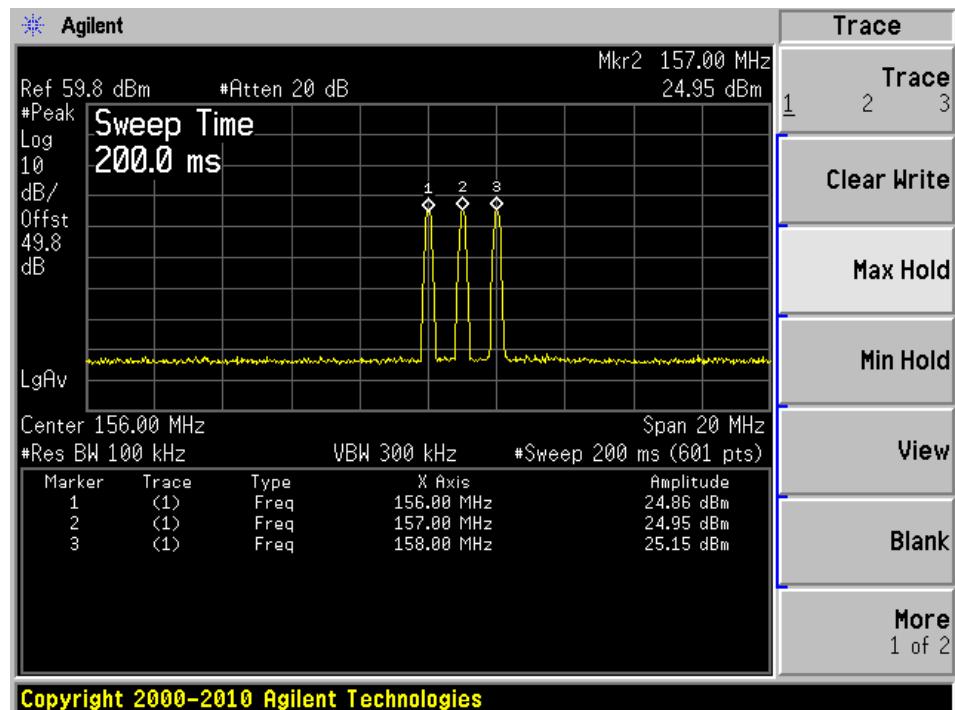


## Inter-modulation, Three Tones, Middle Channel, Output (1)

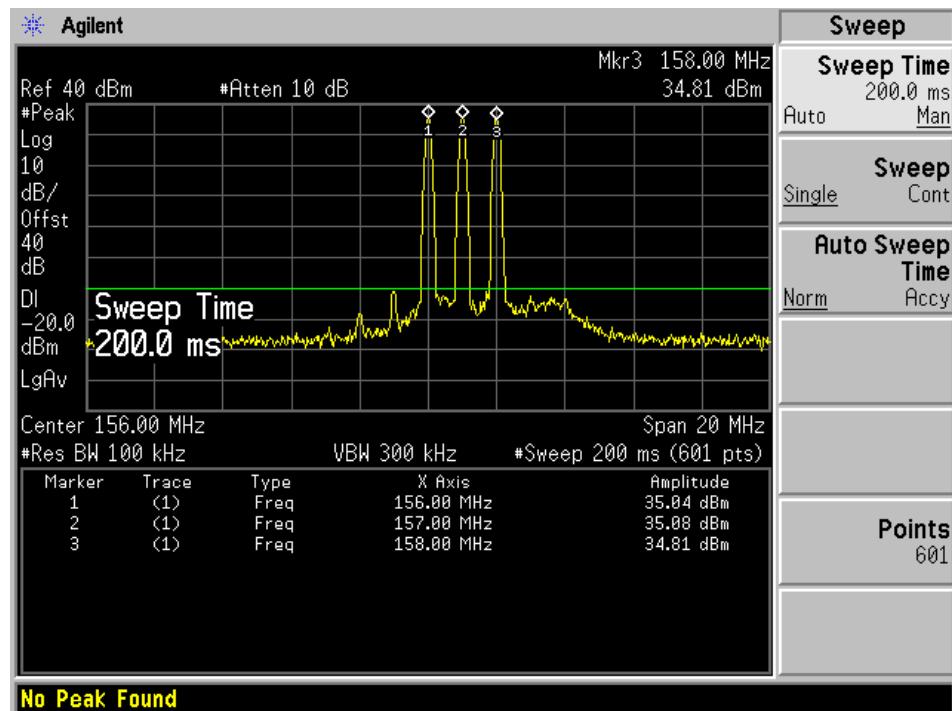


## Inter-modulation, Three Tones, Middle Channel, Output (2)

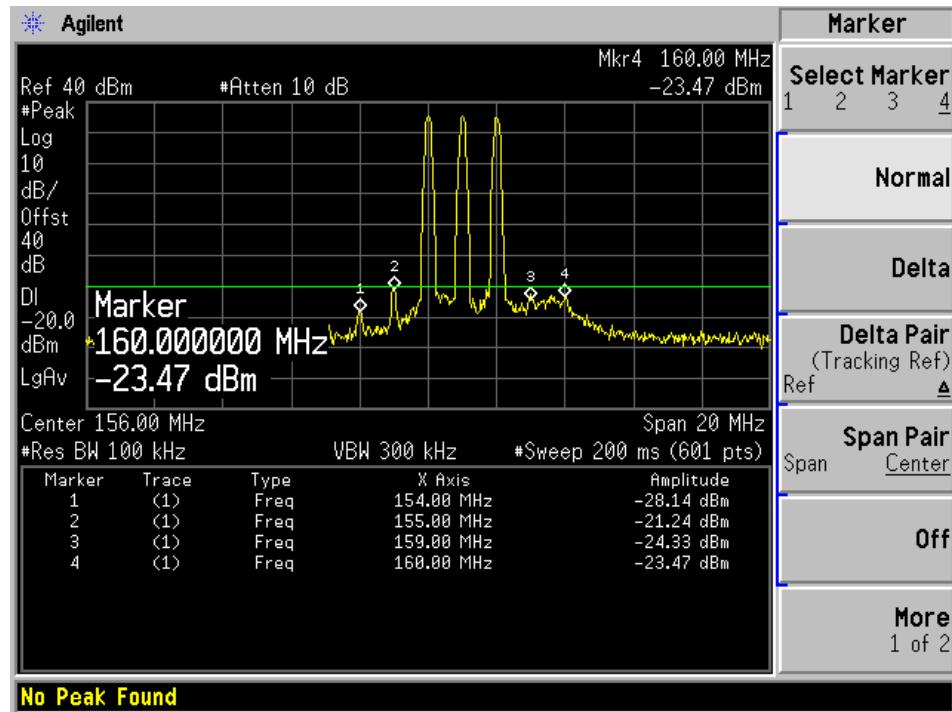


## Inter-modulation, Three Tones, High Channel, Input

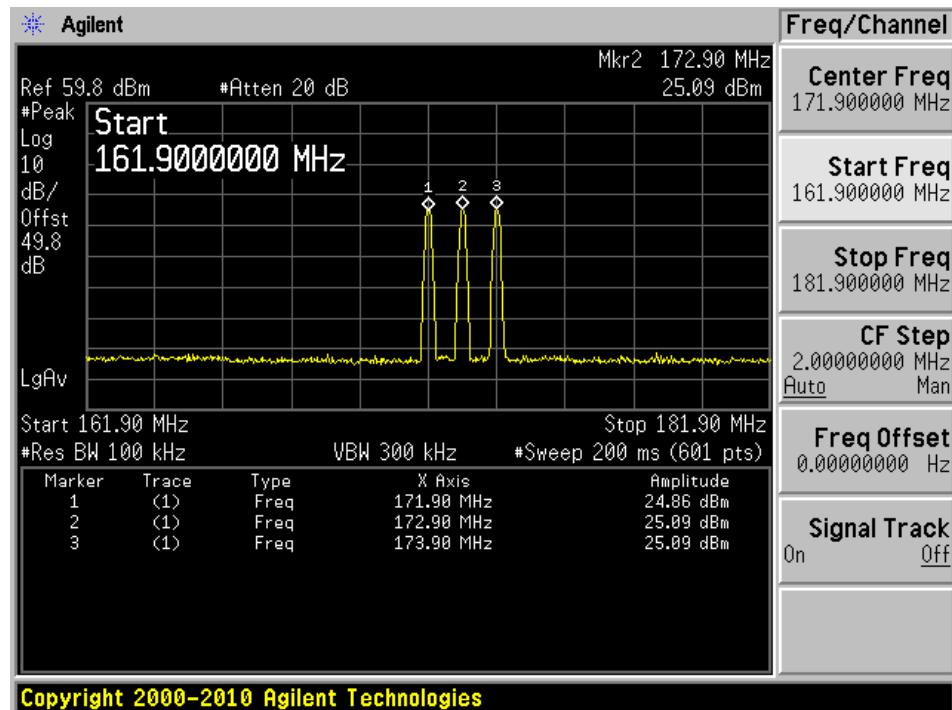

## Inter-modulation, Three Tones, High Channel, Output (1)

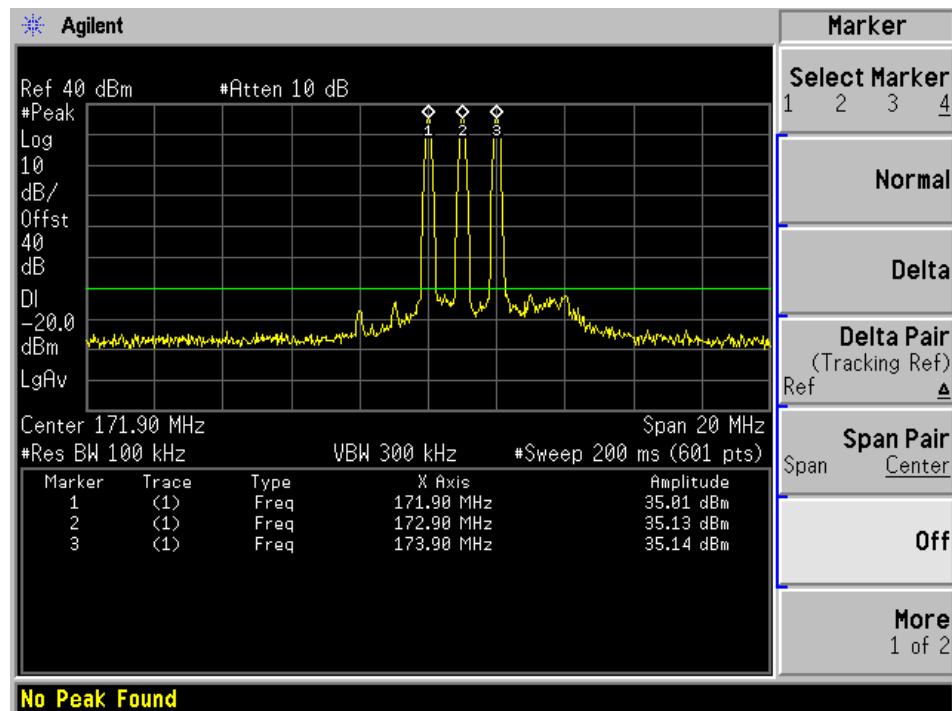

## Inter-modulation, Three Tones, High Channel, Output (2)

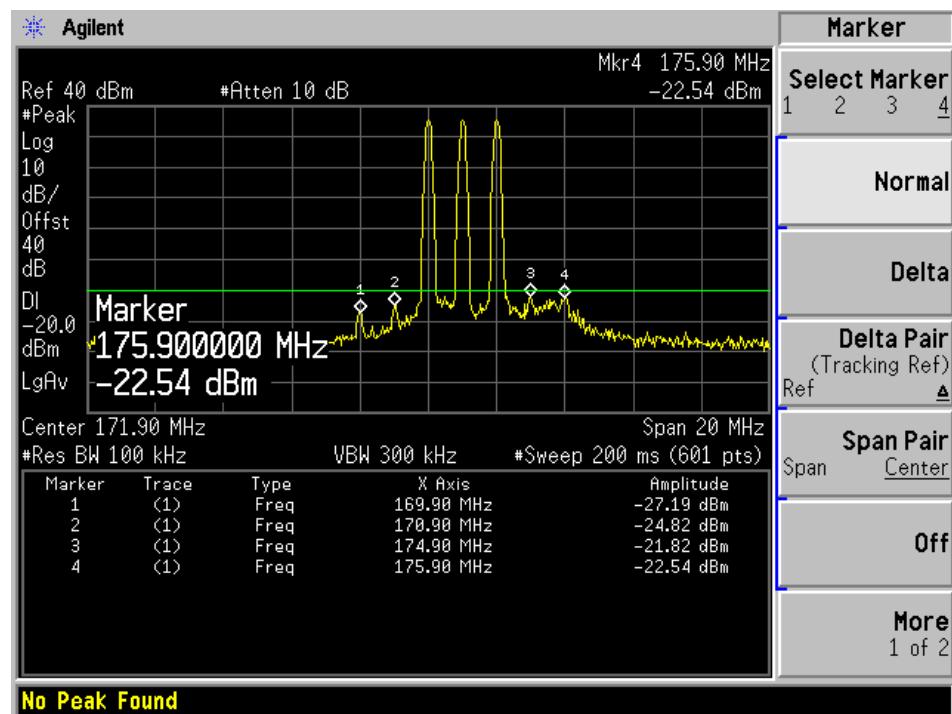

## 7 FCC §2.1053 & §90.210 – FIELD STRENGTH OF SPURIOUS RADIATIONS

### 7.1 Applicable Standard

§2.1053 (a) Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of §2.1049, as appropriate. and §90.210(b),(d): Except as indicated elsewhere in this part, transmitters used in the radio services governed by this part must comply with the emission masks outlined in this section. Unless otherwise stated, per paragraphs (d)(4), (e)(4), and (m) of this section, measurements of emission power can be expressed in either peak or average values provided that emission powers are expressed with the same parameters used to specify the unmodulated transmitter carrier power. For transmitters that do not produce a full power unmodulated carrier, reference to the unmodulated transmitter carrier power refers to the total power contained in the channel bandwidth. Unless indicated elsewhere in this part, the table in this section specifies the emission masks for equipment operating in the frequency bands governed under this part.

### 7.2 Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.


The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = 10 log (TX Power in Watts/0.001) – the absolute level

Spurious attenuation limit in dB = 50 + 10 Log10 (power out in Watts)

### 7.3 Test Setup Block Diagram

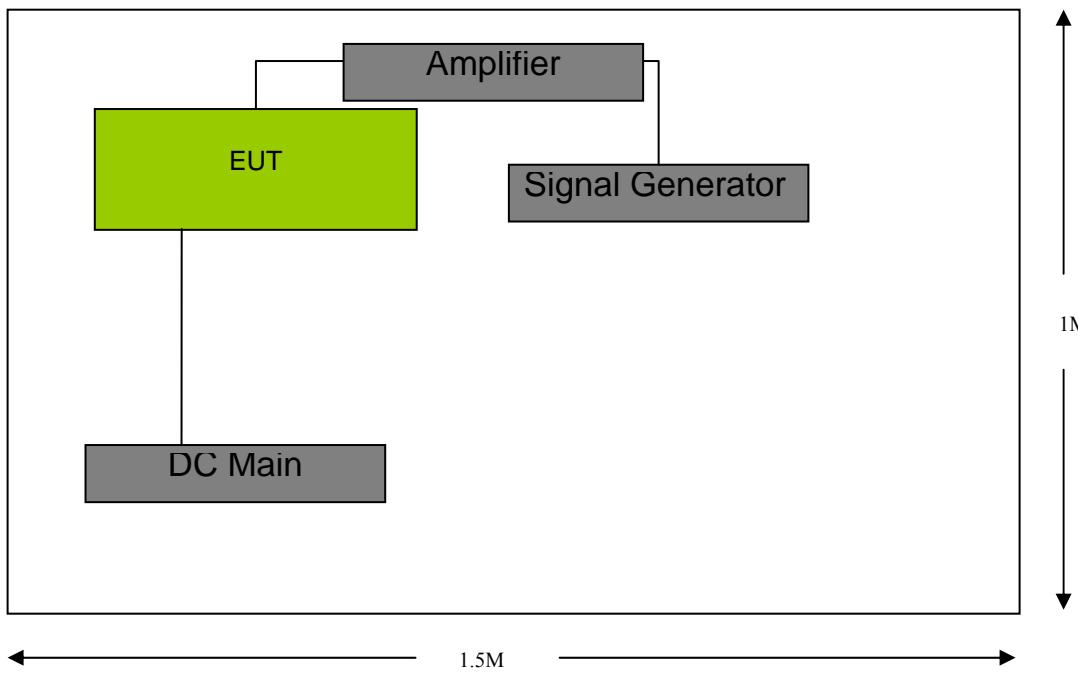

### 7.4 Test Equipment List and Details

Manufacturers	Descriptions	Models	Serial Numbers	Calibration Dates	Calibration Interval
Agilent	Spectrum Analyzer	E4440A	MY44303352	2012-05-10	1 year
Sunol Science Corp	System Controller	SC99V	122303-1	N/R	N/R
Sunol Science Corp	Combination Antenna	JB3	A020106-3	2012-06-18	1 year
Hewlett Packard	Pre-amplifier	8447D	2944A10187	2012-03-08	1 year
Eaton	Horn antenna	96001	Mar-07	2011-10-03	1 year
A.H. Systems	Horn antenna	SAS-200/571	261	2012-01-18	1 year
Mini-Circuits	Pre Amplifier	ZVA-183-S	570400946	2012-05-09	1 year
Com-Power	Dipole Antenna	AD-100	2229	2012-07-23	2 years
Agilent	Signal Generator	E4438C	MY45091309	2012-05-03	1 year

**Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

## 7.5 Test Environmental Conditions

<b>Temperature:</b>	22-24°C
<b>Relative Humidity:</b>	50-55 %
<b>ATM Pressure:</b>	101-102kPa

The testing was performed by Wei Sun on 2012-09-21 in 5 Meters Chamber #2.

## 7.6 Test Results

Middle Channel, Input frequency = 156 MHz (Worst mode: CW signal)

Indicated		Turntable Azimuth (degree)	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polarity (H/V)	Frequency (MHz)	Level (dBm)	Ant. Cord. (dB)	Cable Loss (dB)	Absolute Level (dBm)		
312	71.59	23	169	V	312	-26.06	0	0.67	-26.73	-20	-6.73
312	65.14	154	175	H	312	-33.03	0	0.67	-33.7	-20	-13.7

## 8 FCC §2.1091 - RF EXPOSURE INFORMATION

### 8.1 Applicable Standards

FCC §2.1091, (a) Requirements of this section are a consequence of Commission responsibilities under the National Environmental Policy Act to evaluate the environmental significance of its actions. See subpart I of part 1 of this chapter, in particular §1.1307(b).

According to §1.1310 and §2.1091 RF exposure is calculated.

#### Limits for Exposure

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (minutes)
<b>(A) Limits for Occupational/Controlled Exposures</b>				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6

*f = frequency in MHz*

*\* = Plane-wave equivalent power density*

### 8.2 MPE Prediction

Predication of MPE limit at a given distance, Equation from OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: *S* = power density

*P* = power input to antenna

*G* = power gain of the antenna in the direction of interest relative to an isotropic radiator

*R* = distance to the center of radiation of the antenna

Maximum peak output power at antenna input terminal (dBm): 47.78

Maximum peak output power at antenna input terminal (W): 60

Prediction distance (cm): 60

Prediction frequency (MHz): 156

Antenna Gain (dB): 0

Cable, typical (dB): -1.5

Maximum Antenna Net Gain (numeric): 0.71

Power density of prediction frequency at 60 cm (mW/cm<sup>2</sup>): 0.939

MPE limit for uncontrolled exposure at prediction frequency (mW/cm<sup>2</sup>): 1.0

### Conclusion

The device complies with the MPE requirements by providing a safe separation distance of at least 60 cm between the antenna and human body, including any radiating structure, and any persons when normally operated.