

 Testing and Engineering Services Lab	Date(s) of Evaluation	Test Report Serial No.	Test Report Revision No.	 Test Lab Certificate No. 2470.01
	Dec. 13, 2011	113011BBO-T1138-S95U	Rev. 1.1 (2nd Release)	
Test Report Issue Date		Description of Test(s)	RF Exposure Category	
	Jan. 19, 2012	Specific Absorption Rate	Gen. Pop. / Uncontrolled	

DECLARATION OF COMPLIANCE		SAR RF EXPOSURE EVALUATION			FCC & IC	
Test Lab Information		Name	CELLTECH LABS INC.			
		Address	21-364 Lougheed Road, Kelowna, British Columbia V1X 7R8 Canada			
Test Lab Accreditation		ISO 17025	A2LA Test Lab Certificate No. 2470.01			
Applicant Information		Name	COBRA ELECTRONICS CORPORATION			
		Address	6500 West Cortland Street, Chicago, IL 60707 United States			
Standard(s) Applied		FCC	47 CFR §2.1093	IC	Health Canada Safety Code 6	
Procedure(s) Applied		FCC	OET Bulletin 65, Supp. C (01-01)	KDB Publication 447498 D01v04		
		IC	RSS-102 Issue 4	IEEE	1528-2003	IEC
Device Classification(s)		FCC	Part 95 Family Radio Face Held Transmitter (FRF)			
		IC	Licence-exempt Radio Apparatus: Category I Equipment (RSS-210 Issue 8)			
Application Type(s)		FCC/IC	New Certification			
Device Identifier(s)		FCC ID:	BBO1122A	IC:	906A-1122A	
Device Model(s)		CXT280, CXT235 (only model difference is the CXT280 has battery charging connections)				
Test Sample Serial No.		None (Identical Prototype)				
Hardware Revision No.		V1.3	Firmware Revision No.	V1.3a		
Date of Sample Receipt		Nov. 30, 2011	Date(s) of Evaluation	Dec. 13, 2011		
Device Description		Portable FM UHF GMRS/FRS Push-To-Talk (PTT) Radio Transceiver				
Transmit Frequency Range(s)		462.5500 - 462.7250 MHz (GMRS Channels 15-22)				
		462.5625 - 462.7125 MHz (GMRS/FRS Channels 1-7)				
		467.5625 - 467.7125 MHz (FRS Channels 8-14)				
RF Output Power Tested		CXT280	0.92 Watts	29.64 dBm	ERP	462.5625 MHz
		CXT235	0.88 Watts	29.45 dBm	ERP	462.5625 MHz
Battery Type(s) Tested		Ni-MH Battery	4x AAA	1.2 V	300 mAh	
		Alkaline Battery	4x AAA	1.5 V	Energizer Industrial	
Antenna Type(s) Tested		External Non-detachable				
Body-worn Accessories Tested		Plastic Belt-Clip (supplied with DUT)				
Audio Accessories Tested		Ear-bud with Lapel-Microphone & PTT (P/N: GA-EBM2)				
Max. SAR Level(s) Evaluated		Face-held	0.362 W/kg	1g	50% ptt duty cycle	General Population / Uncontrolled
		Body-worn	0.376 W/kg	1g	50% ptt duty cycle	General Population / Uncontrolled
FCC Spatial Peak SAR Limit		Head/Body	1.6 W/kg	1g	50% ptt duty cycle	General Population / Uncontrolled
Celltech Labs Inc. declares under its sole responsibility that this wireless portable device has demonstrated compliance with the Specific Absorption Rate (SAR) RF exposure requirements specified in FCC 47 CFR §2.1093 and Health Canada's Safety Code 6 for the General Population / Uncontrolled Exposure environment. The device was tested in accordance with the measurement procedures specified in FCC OET Bulletin 65, Supplement C (Edition 01-01), Industry Canada RSS-102 Issue 4, IEEE Standard 1528-2003 and International Standard IEC 62209-2:2010. All measurements were performed in accordance with the SAR system manufacturer recommendations.						
I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.						
The results and statements contained in this report pertain only to the device(s) evaluated.						
This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc.						
Test Report Approved By		 Sean Johnston		Sean Johnston	Lab Manager	Celltech Labs Inc.

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO1122A	IC:	906A-1122A	 COBRA ELECTRONICS CORPORATION
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver	Model(s):	CXT280, CXT235			
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 1 of 50		



Date(s) of Evaluation
Dec. 13, 2011

Test Report Serial No.
113011BBO-T1138-S95U

Test Report Revision No.
Rev. 1.1 (2nd Release)

Test Report Issue Date
Jan. 19, 2012

Description of Test(s)
Specific Absorption Rate

RF Exposure Category
Gen. Pop. / Uncontrolled



Test Lab Certificate No. 2470.01

TABLE OF CONTENTS

1.0 INTRODUCTION	4
2.0 SAR MEASUREMENT SYSTEM	4
3.0 RF OUTPUT POWER MEASUREMENTS	5
4.0 FCC POWER THRESHOLDS FOR PTT DEVICES ($F < 0.5$ GHZ)	5
5.0 SAR PROBE CALIBRATION & MEASUREMENT FREQUENCIES	5
6.0 FLUID DIELECTRIC PARAMETERS	6
7.0 SAR MEASUREMENT SUMMARY	8
8.0 SAR LEVEL CORRECTION FOR FLUID DEVIATION (IC RSS-102 / IEC 62209-2)	9
9.0 DETAILS OF SAR EVALUATION	10
10.0 SAR EVALUATION PROCEDURES	10
11.0 SYSTEM PERFORMANCE CHECK	11
12.0 SIMULATED EQUIVALENT TISSUES	12
13.0 SAR LIMITS	12
14.0 ROBOT SYSTEM SPECIFICATIONS	13
15.0 PROBE SPECIFICATION (ET3DV6)	14
16.0 BARKSI PLANAR PHANTOM	14
17.0 DEVICE HOLDER	14
18.0 TEST EQUIPMENT LIST	15
19.0 JUSTIFICATION FOR EXTENDED SAR DIPOLE CALIBRATION	15
20.0 MEASUREMENT UNCERTAINTIES (IEEE 1528-2003)	16
21.0 MEASUREMENT UNCERTAINTY (IC RSS-102 / IEC 62209-2)	17
22.0 REFERENCES	18
APPENDIX A - SAR MEASUREMENT PLOTS	19
APPENDIX B - SYSTEM PERFORMANCE CHECK PLOTS	28
APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS	33
APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS	38
APPENDIX E - DIPOLE CALIBRATION	48
APPENDIX F - PROBE CALIBRATION	49
APPENDIX G - BARKSI PLANAR PHANTOM CERTIFICATE OF CONFORMITY	50

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO1122A	IC:	906A-1122A	
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver	Model(s):	CXT280, CXT235			

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 13, 2011	<u>Test Report Serial No.</u> 113011BBO-T1138-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)
	<u>Test Report Issue Date</u> Jan. 19, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled



REVISION HISTORY

REVISION NO.	DESCRIPTION	IMPLEMENTED BY	RELEASE DATE
1.0	1st Release	Jon Hughes	Dec. 20, 2011
1.1	2nd Release		
	Added IC Cert. No. & Standards		
	Added Sections 8.0 and 21.0		Jan. 19, 2012
	Revised Sections 6.0, 7.0, 18.0 and 22.0		

TEST REPORT SIGN-OFF

DEVICE TESTED BY	REPORT PREPARED BY	QA REVIEW BY	REPORT APPROVED BY
Mike Meaker	Mike Meaker	Sean Johnston	Sean Johnston

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO1122A	IC:	906A-1122A	 <small>ELectronics Corporation</small>
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver	Model(s):	CXT280, CXT235			
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 3 of 50	


 Celltech Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> Dec. 13, 2011	<u>Test Report Serial No.</u> 113011BBO-T1138-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 ilac-MRA  JAI ACCREDITED
	<u>Test Report Issue Date</u> Jan. 19, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

1.0 INTRODUCTION

This measurement report demonstrates that the Cobra Electronics Corporation Models: CXT235, CX280 Portable FM UHF GMRS/FRS PTT Radio Transceiver complies with the SAR (Specific Absorption Rate) RF exposure requirements specified in FCC 47 CFR §2.1093 (see reference [1]) and Health Canada's Safety Code 6 (see reference [2]) for the General Population / Uncontrolled Exposure environment. The test procedures described in FCC OET Bulletin 65, Supplement C Edition 01-01 (see reference [3]), IC RSS-102 Issue 4 (see reference [4]), IEEE Standard 1528-2003 (see reference [5]) and International Standard IEC 62209-2:2010 (see reference [6]) were employed. A description of the device, operating configuration, detailed summary of the test results, methodology and procedures used in the evaluation, equipment used and the various provisions of the rules are included within this test report.

2.0 SAR MEASUREMENT SYSTEM

Celltech Labs Inc. SAR measurement facility utilizes the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 measurement system is comprised of the measurement server, robot controller, computer, near-field probe, probe alignment sensor, specific anthropomorphic mannequin (SAM) phantom, and various planar phantoms for head and/or body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot utilizes a controller with built in VME-bus computer.

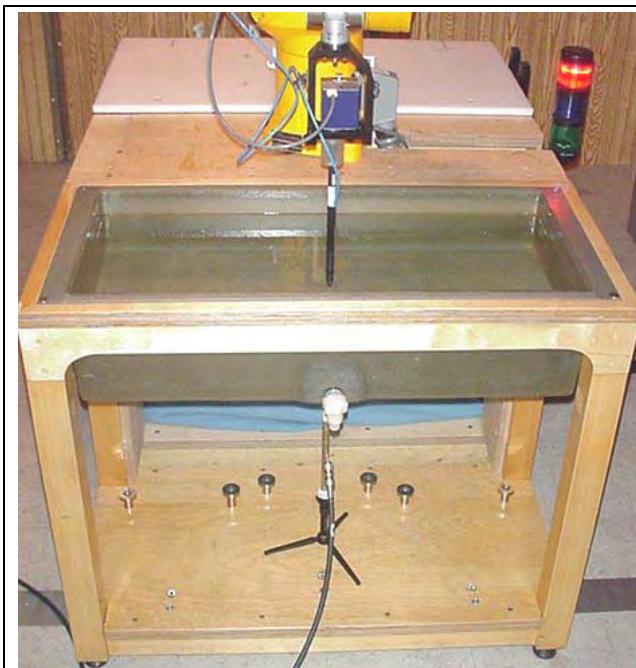

DASY4 SAR System with Barski Fiberglas Planar Phantom



DASY4 Measurement Server

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO1122A	IC:	906A-1122A		
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver		Model(s):	CXT280, CXT235			
2012 Celtech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celtech Labs Inc.				Page 4 of 50		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u>	<u>Test Report Serial No.</u>	<u>Test Report Revision No.</u>	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u>	<u>Description of Test(s)</u>	<u>RF Exposure Category</u>	
	Dec. 13, 2011	113011BBO-T1138-S95U	Rev. 1.1 (2nd Release)	
	Jan. 19, 2012	Specific Absorption Rate	Gen. Pop. / Uncontrolled	

3.0 RF OUTPUT POWER MEASUREMENTS

MEASURED RF OUTPUT POWER						
Mode	Freq. / Chan.	DUT Model	Modulation	Method	dBm	Watts
GMRS	462.5625 MHz CH 1	CXT280	Unmodulated (Continuous Wave)	ERP	29.64	0.92
GMRS	462.5625 MHz CH 1	CXT235	Unmodulated (Continuous Wave)	ERP	29.45	0.88
Notes						
1. The number of test channels ($N_c=1$) was selected in accordance with the procedures specified in FCC KDB 447498 (see reference [7]) Section 6) c).						
2. The ERP level of the DUT was measured by Celltech prior to the SAR evaluations on the open area test site using the substitution method in accordance with the procedures specified in ANSI/TIA/EIA-603-C (see reference [12]).						

4.0 FCC POWER THRESHOLDS FOR PTT DEVICES ($f \leq 0.5$ GHz)

FCC SAR Evaluation Power Thresholds for PTT Devices, $f \leq 0.5$ GHz*		
Exposure Conditions	P mW (General Population)	P mW (Occupational)
Held to face, $d \geq 2.5$ cm	250	1250
Body-worn, $d \geq 1.5$ cm	200	1000
Body-worn, $d \geq 1.0$ cm	150	750

1. The time-averaged output power, corresponding to the required PTT duty factor, is compared with these thresholds.
 2. The closest distance between the user and the device or its antenna is used to determine the power thresholds.
 * Per FCC KDB 447498 D01v04 Section 5)b)ii (see reference [7]).

5.0 SAR PROBE CALIBRATION & MEASUREMENT FREQUENCIES

The following procedures are recommended for measurements at 150 MHz - 3 GHz to minimize probe calibration and tissue dielectric parameter discrepancies. In general, SAR measurements below 300 MHz should be within ± 50 MHz of the probe calibration frequency. At 300 MHz to 3 GHz, measurements should be within ± 100 MHz of the probe calibration frequency. Measurements exceeding 50% of these intervals, ± 25 MHz $<$ 300 MHz and ± 50 MHz \geq 300 MHz, require additional steps (per FCC KDB 450824 D01 v01r01, SAR Probe Calibration and System Verification Considerations for Measurements at 150 MHz - 3 GHz - see reference [8]).

Probe Calibration Freq.	Device Measurement Freq.	Frequency Interval	± 50 MHz \geq 300 MHz
450 MHz	462.5625 MHz	12.5625 MHz	< 50 MHz

The probe calibration and measurement frequency interval is < 50 MHz; therefore the additional steps are not required.

Applicant:	Cobra Electronics Corporation		FCC ID:	BBO1122A	IC:	906A-1122A	 Cobra <small>ELCTRONICS CORPORATION</small>	
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver		Model(s):	CXT280, CXT235				
2012 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 5 of 50		

 Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> Dec. 13, 2011	<u>Test Report Serial No.</u> 113011BBO-T1138-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jan. 19, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

6.0 FLUID DIELECTRIC PARAMETERS

FLUID DIELECTRIC PARAMETERS						
Date: 12/13/2011		Frequency: 450 MHz			Tissue: Head	
Freq	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity
0.350	47.36	0.77	43.5	0.87	8.87%	-11.49%
0.360	47.15	0.77	43.5	0.87	8.39%	-11.49%
0.370	45.91	0.78	43.5	0.87	5.54%	-10.34%
0.380	45.54	0.79	43.5	0.87	4.69%	-9.20%
0.390	45.28	0.81	43.5	0.87	4.09%	-6.90%
0.400	45.62	0.81	43.5	0.87	4.87%	-6.90%
0.410	45.61	0.82	43.5	0.87	4.85%	-5.75%
0.420	44.71	0.83	43.5	0.87	2.78%	-4.60%
0.430	45.55	0.83	43.5	0.87	4.71%	-4.60%
0.440	44.72	0.85	43.5	0.87	2.80%	-2.30%
0.450	44.48	0.86	43.5	0.87	2.25%	-1.15%
0.460	44.38	0.87	43.5	0.87	2.02%	0.00%
0.4625625*	44.4	0.873	43.5	0.87	2.07%	0.34%
0.470	44.37	0.88	43.5	0.87	2.00%	1.15%
0.480	43.98	0.87	43.5	0.87	1.10%	0.00%
0.490	43.69	0.89	43.5	0.87	0.44%	2.30%
0.500	43.78	0.89	43.5	0.87	0.64%	2.30%
0.510	43.58	0.9	43.5	0.87	0.18%	3.45%
0.520	43.28	0.92	43.5	0.87	-0.51%	5.75%
0.530	43.05	0.93	43.5	0.87	-1.03%	6.90%
0.540	42.71	0.93	43.5	0.87	-1.82%	6.90%
0.550	42.8	0.95	43.5	0.87	-1.61%	9.20%

*interpolated using DASY4 software

Test Date	Fluid Type	Ambient Temperature	Fluid Temperature	Fluid Depth	Atmospheric Pressure	Relative Humidity	ρ (Kg/m ³)
Dec 13	450 Head	22.0 °C	20.8 °C	≥ 15 cm	101.1 kPa	30%	1000

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO1122A	IC:	906A-1122A	 Cobra ELECTRONICS CORPORATION
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver	Model(s):	CXT280, CXT235			
2012 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 6 of 50

 Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> Dec. 13, 2011	<u>Test Report Serial No.</u> 113011BBO-T1138-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jan. 19, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

FLUID DIELECTRIC PARAMETERS						
Date: 12/13/2011		Frequency: 450 MHz			Tissue: Body	
Freq	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity
0.350	58.99	0.83	56.7	0.94	4.04%	-11.70%
0.360	58.67	0.83	56.7	0.94	3.47%	-11.70%
0.370	58.58	0.85	56.7	0.94	3.32%	-9.57%
0.380	57.78	0.86	56.7	0.94	1.90%	-8.51%
0.390	57.32	0.86	56.7	0.94	1.09%	-8.51%
0.400	57.65	0.88	56.7	0.94	1.68%	-6.38%
0.410	57.39	0.87	56.7	0.94	1.22%	-7.45%
0.420	57.57	0.88	56.7	0.94	1.53%	-6.38%
0.430	57.75	0.9	56.7	0.94	1.85%	-4.26%
0.440	57.25	0.9	56.7	0.94	0.97%	-4.26%
0.450	56.93	0.92	56.7	0.94	0.41%	-2.13%
0.460	56.7	0.93	56.7	0.94	0.00%	-1.06%
0.4625625*	56.7	0.93	56.7	0.94	0.00%	-1.06%
0.470	56.67	0.93	56.7	0.94	-0.05%	-1.06%
0.480	56.56	0.93	56.7	0.94	-0.25%	-1.06%
0.490	56.37	0.94	56.7	0.94	-0.58%	0.00%
0.500	56.67	0.95	56.7	0.94	-0.05%	1.06%
0.510	56.09	0.95	56.7	0.94	-1.08%	1.06%
0.520	56.06	0.96	56.7	0.94	-1.13%	2.13%
0.530	55.88	0.98	56.7	0.94	-1.45%	4.26%
0.540	55.39	0.99	56.7	0.94	-2.31%	5.32%
0.550	55.87	1.01	56.7	0.94	-1.46%	7.45%

*interpolated using DASY4 software

Test Date	Fluid Type	Ambient Temperature	Fluid Temperature	Fluid Depth	Atmospheric Pressure	Relative Humidity	ρ (Kg/m ³)
Dec 13	450 Body	22.0 °C	21.4 °C	≥ 15 cm	101.1 kPa	30%	1000

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO1122A	IC:	906A-1122A	 Cobra ELECTRONICS CORPORATION
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver	Model(s):	CXT280, CXT235			
2012 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 7 of 50

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 13, 2011	<u>Test Report Serial No.</u> 113011BBO-T1138-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jan. 19, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

7.0 SAR MEASUREMENT SUMMARY

SAR EVALUATION RESULTS

Test Config.	Test Freq.	Chan. / Mode	Battery Type	Accessories	DUT Spacing to Planar Phantom		DUT Power Before Test (ERP)	Measured SAR 1g (W/kg)		SAR Drift During Test	Scaled SAR with droop 1g (W/kg)			
					Body	Audio		DUT	Antenna		dBm	100%	50%	
FACE (CXT280)	462.5625	1	GMRS	Ni-MH	n/a	n/a	2.5 cm	3.3 cm	29.64	0.589	0.295	-0.248	0.624	0.312
	462.5625	1	GMRS	Alkaline	n/a	n/a	2.5 cm	3.3 cm	29.64	0.723	0.362	-0.418	0.796	0.398
BODY (CXT280)	462.5625	1	GMRS	Ni-MH	Belt-Clip	Ear-bud	0.6 cm	1.4 cm	29.64	0.676	0.338	-0.725	0.799	0.399
	462.5625	1	GMRS	Alkaline	Belt-Clip	Ear-bud	0.6 cm	1.4 cm	29.64	0.752	0.376	-0.654	0.874	0.437
BODY (CXT235)	462.5625	1	GMRS	Alkaline	Belt-Clip	Ear-bud	0.6 cm	1.4 cm	29.45	0.735	0.368	-0.571	0.838	0.419

SAR LIMIT(S)

HEAD / BODY

SPATIAL PEAK

RF EXPOSURE CATEGORY

FCC 47 CFR 2.1093

1.6 W/kg

averaged over 1 gram

General Population / Uncontrolled

Notes

1.	Detailed measurement plots showing the maximum SAR location of the DUT are reported in Appendix A.
2.	The CXT235 model variant was evaluated for SAR in the maximum SAR configuration evaluated with CXT280 model (body-worn).
3.	The SAR droop measured by the DASY4 system for the duration of the SAR zoom scan evaluation was added to the measured SAR level to report the scaled SAR result as shown in the above test data table.
4.	The DUT was tested in unmodulated continuous transmit operation (Continuous Wave mode at 100% PTT duty cycle) with the PTT constantly depressed.
5.	The fluid temperature remained within +/-2°C from the dielectric parameter measurement to the completion of the SAR evaluations.
6.	The dielectric parameters of the simulated tissue mixtures were measured prior to the SAR evaluations using a Dielectric Probe Kit and a Network Analyzer (see Section 6 and Appendix C).

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO1122A	IC:	906A-1122A	 Cobra <small>ELectronics Corporation</small>
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver	Model(s):	CXT280, CXT235			
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 8 of 50	

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 13, 2011	<u>Test Report Serial No.</u> 113011BBO-T1138-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 <small>Test Lab Certificate No. 2470.01</small>
	<u>Test Report Issue Date</u> Jan. 19, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

8.0 SAR LEVEL CORRECTION FOR FLUID DEVIATION (IC RSS-102 / IEC 62209-2)

The SAR levels are corrected for deviation of complex permittivity in accordance with Section 6.1.1 of IEC 62209-2:2010 (see reference [6]) as shown below (Note: this section is required for Industry Canada only).

Test Config.	Test Freq. (MHz)	Target_e	Target_s	Test_e	Test_s	Deviation Permittivity	Deviation Conductivity	Measured SAR Level 50% (W/kg)	Scaled SAR Level 50% (W/kg)	Corrected SAR Level 50% (W/kg)
Face	462.5625	43.5	0.87	44.4	0.873	2.07%	0.34%	0.295	0.312	N/A
Face	462.5625	43.5	0.87	44.4	0.873	2.07%	0.34%	0.362	0.398	N/A
Body	462.5625	56.7	0.94	56.7	0.93	0.00%	-1.06%	0.338	0.399	N/A
Body	462.5625	56.7	0.94	56.7	0.93	0.00%	-1.06%	0.376	0.437	N/A
Body	462.5625	56.7	0.94	56.7	0.93	0.00%	-1.06%	0.368	0.419	N/A

SAR Correction Formula (IEC 62209-2:2010 Section 6.1.1)

$$\Delta\text{SAR} = c_e \Delta\epsilon_r + c_\sigma \Delta\sigma \quad (\text{F.1})$$

where

$c_e = \partial(\Delta\text{SAR})/\partial(\Delta\epsilon_r)$ is the coefficients representing the sensitivity of SAR to permittivity where SAR is normalized to output power;

$c_\sigma = \partial(\Delta\text{SAR})/\partial(\Delta\sigma)$ is the coefficients representing the sensitivity of SAR to conductivity, where SAR is normalized to output power.

The values of c_e and c_σ have a simple relationship with frequency that can be described using polynomial equations. For the 1 g averaged SAR c_e and c_σ are given by

$$c_e = -7.854 \times 10^{-4} f^3 + 9.402 \times 10^{-3} f^2 - 2.742 \times 10^{-2} f - 0.2026 \quad (\text{F.2})$$

$$c_\sigma = 9.804 \times 10^{-3} f^3 - 8.661 \times 10^{-2} f^2 + 2.981 \times 10^{-2} f + 0.7829 \quad (\text{F.3})$$

where

f is the frequency in GHz.

SAR Correction Calculation

Test Plot #	Face 1	Face 2	Body 1	Body 2	Body 3
Frequency (GHz)	0.4625625	0.4625625	0.4625625	0.4625625	0.4625625
C _e	-0.2133	-0.2133	-0.2133	-0.2133	-0.2133
C _σ	0.7791	0.7791	0.7791	0.7791	0.7791
Δ E	0.0207	0.0207	0.0000	0.0000	0.0000
Δσ	0.0034	0.0034	-0.0106	-0.0106	-0.0106
ΔSAR	-0.0018	-0.0018	-0.0083	-0.0083	-0.0083

Conclusion

The correction is only applied where ΔSAR has a positive sign. Since all ΔSAR values are negative; no correction is applied.

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO1122A	IC:	906A-1122A	 <small>ELCTRONICS CORPORATION</small>
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver	Model(s):	CXT280, CXT235			
2012 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 9 of 50

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 13, 2011	<u>Test Report Serial No.</u> 113011BBO-T1138-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jan. 19, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

9.0 DETAILS OF SAR EVALUATION

The Cobra Electronics Corporation Models: CXT280, CXT235 Portable FM UHF GMRS/FRS PTT Radio Transceiver was compliant for localized Specific Absorption Rate (General Population / Uncontrolled Exposure) based on the test provisions and conditions described below. The detailed test setup photographs are shown in Appendix D.

1. The DUT was evaluated for SAR in a face-held configuration (CXT280 only) with the front of the radio placed parallel to the outer surface of the planar phantom. A 2.5 cm spacing was maintained between the front of the DUT and the outer surface of the planar phantom.
2. The DUT was evaluated for SAR in a body-worn configuration with the back of the radio facing the outer surface of the planar phantom. The DUT antenna was placed parallel to the planar phantom. The attached plastic belt-clip accessory was touching the planar phantom and provided 0.6 cm spacing from the back of the DUT to the outer surface of the planar phantom. The DUT was evaluated for body-worn SAR with the Cobra supplied ear-bud lapel-microphone audio accessory connected to the external audio port.
3. The SAR drift of the DUT was measured by the DASY4 system for the duration of the zoom scan. A SAR-versus-Time power droop evaluation was performed and is shown in Appendix A.
4. New or fully charged batteries were used for each SAR evaluation. The batteries were again replaced with a fresh set before zoom scans of each evaluation.
5. The DUT was tested in unmodulated continuous transmit operation (Continuous Wave mode at 100% duty cycle) with the PTT transmit key constantly depressed. For a push-to-talk device the 50% duty cycle compensation reported assumes a transmit/receive cycle of equal time base.

10.0 SAR EVALUATION PROCEDURES

- (i) The evaluation was performed in the applicable area of the phantom depending on the type of device being tested. For devices held to the ear during normal operation, both the left and right ear positions were evaluated using the SAM phantom.
 (ii) For body-worn and face-held devices a planar phantom was used.
- b. The SAR was determined by a pre-defined procedure within the DASY4 software. Upon completion of a reference and optical surface check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 15mm x 15mm.
 An area scan was determined as follows:
- c. Based on the defined area scan grid, a more detailed grid is created to increase the points by a factor of 10. The interpolation function then evaluates all field values between corresponding measurement points.
- d. A linear search is applied to find all the candidate maxima. Subsequently, all maxima are removed that are >2 dB from the global maximum. The remaining maxima are then used to position the cube scans.
 A 1g and 10g spatial peak SAR was determined as follows:
- e. Extrapolation is used to find the points between the dipole center of the probe and the surface of the phantom. This data cannot be measured, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.4 mm (see probe calibration document in Appendix F). The extrapolation was based on trivariate quadratics computed from the previously calculated 3D interpolated points nearest the phantom surface.
- f. Interpolated data is used to calculate the average SAR over 1g and 10g cubes by spatially discretizing the entire measured cube. The volume used to determine the averaged SAR is a 1mm grid (42875 interpolated points).
- g. A zoom scan volume of 30 mm x 30 mm x 30 mm (5 x 5 x 7 points) centered at the peak SAR location determined from the area scan is used for all zoom scans for devices with a transmit frequency < 800 MHz. Zoom scans for frequencies ≥ 800 MHz are determined with a scan volume of 30 mm x 30 mm x 30 mm (7 x 7 x 7) to ensure complete capture of the peak spatial-average SAR.

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO1122A	IC:	906A-1122A	 Cobra <small>ELectromagnetic CORPORATION</small>
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver	Model(s):	CXT280, CXT235			
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 10 of 50



 Testing and Engineering Services Lab	Date(s) of Evaluation	Test Report Serial No.	Test Report Revision No.	 Test Lab Certificate No. 2470.01
	Dec. 13, 2011	113011BBO-T1138-S95U	Rev. 1.1 (2nd Release)	
Test Report Issue Date	Jan. 19, 2012	Description of Test(s)	RF Exposure Category	
		Specific Absorption Rate	Gen. Pop. / Uncontrolled	

11.0 SYSTEM PERFORMANCE CHECK

Prior to the SAR evaluations, daily system checks were performed with the Barski planar phantom and 450 MHz SPEAG validation dipole (see Appendix B for system performance check test plots) in accordance with the procedures described in IEEE Standard 1528-2003 (see reference [5]) and IEC Standard 62209-2 (see reference [6]). The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer (see Appendix C for measured fluid dielectric parameters). A forward power of 398 mW was applied to the dipole and the system was verified to a tolerance of $\pm 10\%$ from the SAR system manufacturer's dipole calibration target SAR value (see Appendix E for system manufacturer's dipole calibration procedures).

SYSTEM PERFORMANCE CHECK EVALUATION

Test Date	Equiv. Tissue	SAR 1g (W/kg)			Dielectric Constant ϵ_r			Conductivity σ (mho/m)			ρ (Kg/m ³)	Amb. Temp. (°C)	Fluid Temp. (°C)	Fluid Depth (cm)	Humid. (%)	Barom. Press. (kPa)	
		Freq. (MHz)	Target	Meas.	Dev.	Target	Meas.	Dev.	Target	Meas.	Dev.						
Dec 12	Head 450	1.87 $\pm 10\%$	1.88	+0.5%	43.5 $\pm 5\%$	45.5	+4.6%	0.87 $\pm 5\%$	0.88	+1.1%	1000	22.0	21.4	≥ 15	30	101.1	
Dec 12	Body 450	1.78 $\pm 10\%$	1.73	-2.8%	56.7 $\pm 5\%$	56.8	+0.2%	0.94 $\pm 5\%$	0.91	-3.2%	1000	22.0	21.7	≥ 15	30	101.1	
Notes	1.	The target SAR value is the measured value specified by the SAR system manufacturer in the dipole calibration (see Appendix E).															
	2.	The target dielectric parameters are the nominal values specified by the SAR system manufacturer in the dipole calibration (see Appendix E).															
	3.	The fluid temperature remained within $+/-2^{\circ}\text{C}$ from the dielectric parameter measurement to the completion of the system performance check.															
	4.	The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer (see Appendix C).															
	5.	The system performance check evaluations were performed the day before the DUT SAR evaluation test date. Compliance was met with the following provision per TCBC Workshop Presentation April 5-7, 2011 (Kwok Chan Presentation File 04-06-2011-FCC 4 RF Exposure Guidance 040611- KC): SAR System Verification when head and body tissue dielectric parameters are required to test a device, separate SAR system verifications are required - daily verification of each liquid is usually not necessary when liquid parameter tolerances are maintained in a controlled environment - typically every few days is sufficient or when liquid is changed															

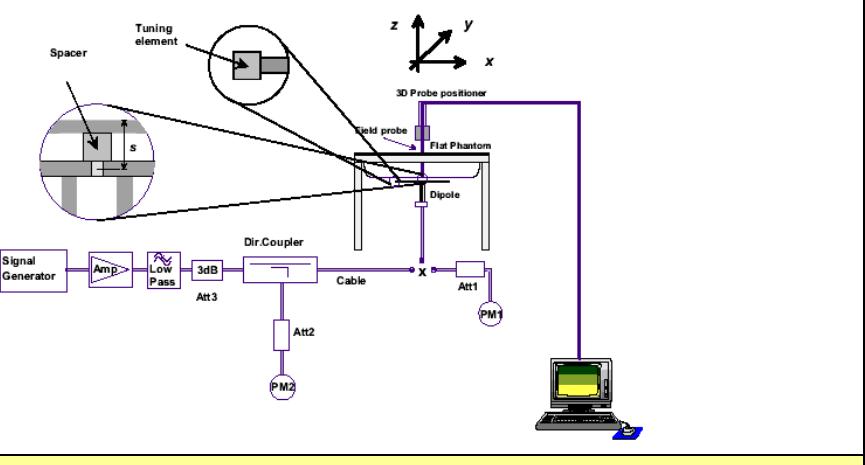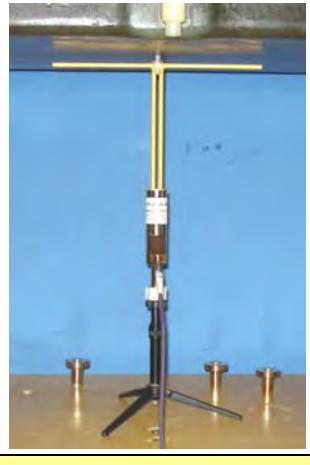	
System Performance Check Measurement Setup Diagram (IEEE Standard 1528-2003)	SPEAG 450 MHz Validation Dipole Setup

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO1122A	IC:	906A-1122A		
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver	Model(s):	CXT280, CXT235				
2012 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 11 of 50		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 13, 2011	<u>Test Report Serial No.</u> 113011BBO-T1138-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jan. 19, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

12.0 SIMULATED EQUIVALENT TISSUES

The simulated equivalent tissue recipes in the table below are derived from the SAR system manufacturer's suggested recipes in the DASY4 manual (see references [9] and [10]) in accordance with the procedures specified in IEEE Standard 1528-2003 (see reference [5]). The ingredient percentage may have been adjusted minimally in order to achieve the appropriate target dielectric parameters within the specified tolerance.

SIMULATED TISSUE MIXTURES		
INGREDIENT	450 MHz HEAD	450 MHz BODY
Water	38.56 %	52.00 %
Sugar	56.32 %	45.65 %
Salt	3.95 %	1.75 %
HEC	0.98 %	0.50 %
Bactericide	0.19 %	0.10 %

13.0 SAR LIMITS

SAR RF EXPOSURE LIMITS			
FCC 47 CFR 2.1093	Health Canada Safety Code 6	General Population	Occupational
Spatial Average (averaged over the whole body)		0.08 W/kg	0.4 W/kg
Spatial Peak (averaged over any 1 g of tissue)		1.6 W/kg	8.0 W/kg
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)		4.0 W/kg	20.0 W/kg
The Spatial Average value of the SAR averaged over the whole body.			
The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.			
The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.			
Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.			
Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.			

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO1122A	IC:	906A-1122A	 Cobra <small>ELCTRONIC COMMUNICATION</small>
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver	Model(s):	CXT280, CXT235			
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 12 of 50

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 13, 2011	<u>Test Report Serial No.</u> 113011BBO-T1138-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jan. 19, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

14.0 ROBOT SYSTEM SPECIFICATIONS

<u>Specifications</u>	
Positioner	Stäubli Unimation Corp. Robot Model: RX60L
Repeatability	0.02 mm
No. of axis	6
<u>Data Acquisition Electronic (DAE) System</u>	
Cell Controller	
Processor	AMD Athlon XP 2400+
Clock Speed	2.0 GHz
Operating System	Windows XP Professional
Data Converter	
Features	Signal Amplifier, multiplexer, A/D converter, and control logic
Software	Measurement Software: DASY4, V4.7 Build 44 Postprocessing Software: SEMCAD, V1.8 Build 171
Connecting Lines	Optical downlink for data and status info., Optical uplink for commands and clock
<u>DASY4 Measurement Server</u>	
Function	Real-time data evaluation for field measurements and surface detection
Hardware	PC/104 166MHz Pentium CPU; 32 MB chipdisk; 64 MB RAM
Connections	COM1, COM2, DAE, Robot, Ethernet, Service Interface
<u>E-Field Probe</u>	
Model	ET3DV6
Serial No.	1590
Construction	Triangular core fiber optic detection system
Frequency	10 MHz to 6 GHz
Linearity	± 0.2 dB (30 MHz to 3 GHz)
<u>Phantom</u>	
Type	Barski Planar Phantom
Shell Material	Fiberglass
Thickness	2.0 ± 0.1 mm
Volume	Approx. 70 liters

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO1122A	IC:	906A-1122A	 COBRA <small>ELCTRONICS CORPORATION</small>
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver	Model(s):	CXT280, CXT235			
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 13 of 50	

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 13, 2011	<u>Test Report Serial No.</u> 113011BBO-T1138-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jan. 19, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

15.0 PROBE SPECIFICATION (ET3DV6)

Construction:	Symmetrical design with triangular core; Built-in shielding against static charges	
Calibration:	PEEK enclosure material (resistant to organic solvents, glycol)	
	In air from 10 MHz to 2.5 GHz	
	In head simulating tissue at frequencies of 900 MHz	
	and 1.8 GHz (accuracy \pm 8%)	
Frequency:	10 MHz to > 6 GHz; Linearity: \pm 0.2 dB (30 MHz to 3 GHz)	
Directivity:	\pm 0.2 dB in head tissue (rotation around probe axis) \pm 0.4 dB in head tissue (rotation normal to probe axis)	
Dynamic Range:	5 μ W/g to > 100 mW/g; Linearity: \pm 0.2 dB	
Surface Detect:	\pm 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces	
Dimensions:	Overall length: 330 mm; Tip length: 16 mm; Body diameter: 12 mm; Tip diameter: 6.8 mm	
Application:	Distance from probe tip to dipole centers: 2.7 mm General dosimetry up to 3 GHz; Compliance tests of mobile phone	

ET3DV6 E-Field Probe

16.0 BARKSI PLANAR PHANTOM

The Barski planar phantom is a fiberglass shell phantom with a 2.0 mm (+/-0.2mm) thick device measurement area at the center of the phantom for SAR evaluations of devices with a larger surface area than the planar section of the SAM phantom. The planar phantom is integrated in a wooden table. The planar phantom was used for the DUT SAR evaluations and the system performance check evaluations. See Appendix G for dimensions and specifications of the Barski planar phantom.



Barski Planar Phantom

17.0 DEVICE HOLDER

<p>The DASY4 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.</p>	
--	---

Device Holder

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO1122A	IC:	906A-1122A	
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver	Model(s):	CXT280, CXT235			
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 14 of 50	

 Celltech Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> Dec. 13, 2011	<u>Test Report Serial No.</u> 113011BBO-T1138-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 ilac-MRA  JL ACCREDITED
	<u>Test Report Issue Date</u> Jan. 19, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

18.0 TEST EQUIPMENT LIST

TEST EQUIPMENT		ASSET NO.	SERIAL NO.	DATE CALIBRATED	CALIBRATION INTERVAL
USED	DESCRIPTION				
x	Schmid & Partner DASY4 System	-	-	-	-
x	-DASY4 Measurement Server	00158	1078	CNR	CNR
x	-Robot	00046	599396-01	CNR	CNR
x	-DAE4	00019	353	27Apr10	Biennial
x	-ET3DV6 E-Field Probe	00017	1590	22Jun11	Annual
x	-SPEAG D450V3 Validation Dipole	00217	1068	18Jan10	Triennial
x	-Barski Planar Phantom	00155	03-01	CNR	CNR
x	HP 85070C Dielectric Probe Kit	00033	none	CNR	CNR
x	Gigatronics 8652A Power Meter	00007	1835272	04May10	Biennial
x	Gigatronics 80701A Power Sensor	00014	1833699	04May10	Biennial
x	Gigatronics 80701A Power Sensor	00011	1833542	04May10	Biennial
x	Narda 3020A Directional Coupler	00064	none	CNR	CNR
x	10dB Attenuator	00102	none	CNR	CNR
x	HP 8753ET Network Analyzer	00134	US39170292	04May10	Biennial
x	Rohde & Schwarz SMR20 Signal Generator	00006	100104	CNR	CNR
x	Amplifier Research 5S1G4 Power Amplifier	00106	26235	CNR	CNR
Abbr.	CNR = Calibration Not Required				

19.0 JUSTIFICATION FOR EXTENDED SAR DIPOLE CALIBRATION

SAR dipoles calibrated less than two years ago but more than one year ago were confirmed by maintaining return loss (< -20dB, within 20% of prior calibration) and impedance (within 5Ω from prior calibration) requirements per extended calibrations in FCC KDB 450824 (see reference [8]).

SPEAG VALIDATION DIPOLE D450V3 - SN: 1068						
Measurement Date	Freq.	TSL	Return Loss (dB)	Δ %	Impedance (Ω)	Δ Ω
January 18, 2010	450 MHz	Head	-21.0		57.5	
February 7, 2011			-21.3	1.5%	53.8	3.7
January 18, 2010	450 MHz	Body	-20.0		54.8	
February 7, 2011			-20.5	2.5%	50.4	4.4

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO1122A	IC:	906A-1122A	
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver		Model(s):	CXT280, CXT235		
2012 Celtech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celtech Labs Inc.				Page 15 of 50	

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u>	<u>Test Report Serial No.</u>	<u>Test Report Revision No.</u>	 <small>Test Lab Certificate No. 2470.01</small>
	<u>Test Report Issue Date</u>	<u>Description of Test(s)</u>	<u>RF Exposure Category</u>	

20.0 MEASUREMENT UNCERTAINTIES (IEEE 1528-2003)

UNCERTAINTY BUDGET FOR DEVICE EVALUATION (IEEE 1528-2003)									
Uncertainty Component	IEEE 1528 Section	Uncertainty Value ±%	Probability Distribution	Divisor	ci 1g	ci 10g	Uncertainty Value ±% (1g)	Uncertainty Value ±% (10g)	V_i or V_{eff}
Measurement System									
Probe Calibration (450 MHz)	E.2.1	6.7	Normal	1	1	1	6.7	6.7	∞
Axial Isotropy	E.2.2	4.7	Rectangular	1.732050808	0.7	0.7	1.9	1.9	∞
Hemispherical Isotropy	E.2.2	9.6	Rectangular	1.732050808	0.7	0.7	3.9	3.9	∞
Boundary Effect	E.2.3	1	Rectangular	1.732050808	1	1	0.6	0.6	∞
Linearity	E.2.4	4.7	Rectangular	1.732050808	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1	Rectangular	1.732050808	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	0.3	Normal	1	1	1	0.3	0.3	∞
Response Time	E.2.7	0.8	Rectangular	1.732050808	1	1	0.5	0.5	∞
Integration Time	E.2.8	2.6	Rectangular	1.732050808	1	1	1.5	1.5	∞
RF Ambient Conditions	E.6.1	3	Rectangular	1.732050808	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	Rectangular	1.732050808	1	1	0.2	0.2	∞
Probe Positioning wrt Phantom Shell	E.6.3	2.9	Rectangular	1.732050808	1	1	1.7	1.7	∞
Extrapolation, interpolation & integration algorithms for max. SAR evaluation	E.5	1	Rectangular	1.732050808	1	1	0.6	0.6	∞
Test Sample Related									
Test Sample Positioning	E.4.2	2.9	Normal	1	1	1	2.9	2.9	12
Device Holder Uncertainty	E.4.1	3.6	Normal	1	1	1	3.6	3.6	8
SAR Drift Measurement	6.6.2	5	Rectangular	1.732050808	1	1	2.9	2.9	∞
Phantom and Tissue Parameters									
Phantom Uncertainty	E.3.1	4	Rectangular	1.732050808	1	1	2.3	2.3	∞
Liquid Conductivity (target)	E.3.2	5	Rectangular	1.732050808	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (measured)	E.3.3	1.06	Normal	1	0.64	0.43	0.7	0.5	∞
Liquid Permittivity (target)	E.3.2	5	Rectangular	1.732050808	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (measured)	E.3.3	2.07	Normal	1	0.6	0.49	1.2	1.0	∞
Combined Standard Uncertainty				RSS			11.13	10.96	
Expanded Uncertainty (95% Confidence Interval)				k=2			22.25	21.92	

Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2

Applicant:	Cobra Electronics Corporation		FCC ID:	BBO1122A	IC:	906A-1122A	 Cobra <small>TELECOMMUNICATIONS</small>	
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver		Model(s):	CXT280, CXT235				
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 16 of 50			

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u>	<u>Test Report Serial No.</u>	<u>Test Report Revision No.</u>	 ILAC-MRA  ACCREDITED
	Dec. 13, 2011	113011BBO-T1138-S95U	Rev. 1.1 (2nd Release)	
	<u>Test Report Issue Date</u>	<u>Description of Test(s)</u>	<u>RF Exposure Category</u>	
	Jan. 19, 2012	Specific Absorption Rate	Gen. Pop. / Uncontrolled	Test Lab Certificate No. 2470.01

21.0 MEASUREMENT UNCERTAINTY (IC RSS-102 / IEC 62209-2)

Uncertainty Budget for Device Evaluation (IEC 62209-2:2010)									
Source of Uncertainty	IEC 62209-2 Section	Tolerance / Uncertainty ±%	Probability Distribution	Divisor	ci 1g	ci 10g	Standard Uncertainty ±% (1g)	Standard Uncertainty ±% (10g)	V _i or V _{eff}
Measurement System									
Probe Calibration (450 MHz)	7.2.2.1	6.7	Normal	1	1	1	6.7	6.7	∞
Isotropy	7.2.2.2	4.7	Rectangular	1.732050808	1	1	2.7	2.7	∞
Boundary Effect	7.2.2.6	1	Rectangular	1.732050808	1	1	0.6	0.6	∞
Linearity	7.2.2.3	4.7	Rectangular	1.732050808	1	1	2.7	2.7	∞
Detection Limits	7.2.2.5	1	Rectangular	1.732050808	1	1	0.6	0.6	∞
Readout Electronics	7.2.2.7	0.3	Normal	1	1	1	0.3	0.3	∞
Response Time	7.2.2.8	0.8	Rectangular	1.732050808	1	1	0.5	0.5	∞
Integration Time	7.2.2.9	2.6	Rectangular	1.732050808	1	1	1.5	1.5	∞
RF Ambient Conditions	7.2.4.5	3	Rectangular	1.732050808	1	1	1.7	1.7	∞
Probe Positioner Mechanical Restrictions	7.2.3.1	0.4	Rectangular	1.732050808	1	1	0.2	0.2	∞
Probe Positioning wrt Phantom Shell	7.2.3.3	2.9	Rectangular	1.732050808	1	1	1.7	1.7	∞
Post-processing	7.2.5	1	Rectangular	1.732050808	1	1	0.6	0.6	∞
Test Sample Related									
Test Sample Positioning	7.2.3.4.3	2.9	Normal	1	1	1	2.9	2.9	12
Device Holder Uncertainty	7.2.3.4.2	3.6	Normal	1	1	1	3.6	3.6	8
Drift of Output Power (meas. SAR drift)	7.2.2.10	0	Rectangular	1.732050808	1	1	0.0	0.0	∞
Phantom and Tissue Parameters									
Phantom Uncertainty	7.2.3.2	4	Rectangular	1.732050808	1	1	2.3	2.3	∞
SAR Correction Algorithm for deviations in permittivity and conductivity	7.2.4.3	1.2	Normal	1	1	0.81	1.2	0.97	∞
Liquid Conductivity (measured)	7.2.4.3	1.06	Normal	1	0.78	0.71	0.8	0.8	∞
Liquid Permittivity (measured)	7.2.4.3	2.07	Normal	1	0.23	0.26	0.5	0.5	∞
Liquid Permittivity - temp. uncertainty	7.2.4.4	0.27	Rectangular	1.732050808	0.78	0.71	0.1	0.1	∞
Liquid Conductivity - temp. uncertainty	7.2.4.4	0.84	Rectangular	1.732050808	0.23	0.26	0.1	0.1	∞
Combined Standard Uncertainty	7.3.1		RSS				9.91	9.88	
Expanded Uncertainty (95% Confidence Interval)	7.3.2		k=2				19.81	19.75	

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO1122A	IC:	906A-1122A		
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver		Model(s):	CXT280, CXT235			
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 17 of 50		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 13, 2011	<u>Test Report Serial No.</u> 113011BBO-T1138-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jan. 19, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

22.0 REFERENCES

- [1] Federal Communications Commission - "Radiofrequency radiation exposure evaluation: portable devices", Rule Part 47 CFR §2.1093.
- [2] Health Canada - "Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz", Safety Code 6: 1999.
- [3] Federal Communications Commission - "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.
- [4] Industry Canada - "Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)", Radio Standards Specification RSS-102 Issue 4: March 2010.
- [5] IEEE Standard 1528-2003 - "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques": December 2003.
- [6] International Standard IEC 62209-2 Edition 1.0 2010-03 - "Human exposure to radio frequency fields from hand-held & body-mounted wireless communication devices - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)".
- [7] Federal Communications Commission, Office of Engineering and Technology - "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies"; KDB 447498 D01v04: November 2009.
- [8] Federal Communications Commission, Office of Engineering and Technology - "Application Note: SAR Probe Calibration and System Verification Considerations for Measurements at 150 MHz - 3 GHz"; KDB 450824 D01 v01r01: January 2007.
- [9] Schmid & Partner Engineering AG - DASY4 Manual V4.6, Chapter 16 Application Note, Head Tissue Recipe: Sept. 2005.
- [10] Schmid & Partner Engineering AG - DASY4 Manual V4.6, Chapter 17 Application Note, Body Tissue Recipe: Sept. 2005.
- [11] ISO/IEC 17025 - "General requirements for the competence of testing and calibration laboratories (ISO/IEC 17025:2005)."
- [12] ANSI/TIA-603-C - "Land Mobile FM or PM Communications Equipment - Measurement and Performance Standards": December 2004.

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO1122A	IC:	906A-1122A	 <small>ELectroMAGnetiC CORPORATiOn</small>	
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver		Model(s):	CXT280, CXT235			
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 18 of 50		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 13, 2011	<u>Test Report Serial No.</u> 113011BBO-T1138-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)
	<u>Test Report Issue Date</u> Jan. 19, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled



APPENDIX A - SAR MEASUREMENT PLOTS

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO1122A	IC:	906A-1122A	 <small>ELectroMAGnetiC CORPORATiOn</small>
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver	Model(s):	CXT280, CXT235			
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 19 of 50	

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 13, 2011	<u>Test Report Serial No.</u> 113011BBO-T1138-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)
	<u>Test Report Issue Date</u> Jan. 19, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled



Date Tested: 12/13/2011

Face-held SAR - GMRS - Ch. 1 - 462.5625 MHz - Ni-MH AAA Rechargeable Batteries

DUT: Cobra; Model: CXT280; Type: Portable GMRS/FRS PTT Radio Transceiver; Serial: None

Ambient Temp: 22C; Fluid Temp: 20.8C; Barometric Pressure: 101.1 kPa; Humidity: 30%

Communication System: CW

Frequency: 462.563 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used (interpolated): $f = 462.563$ MHz; $\sigma = 0.873$ mho/m; $\epsilon_r = 44.4$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(7.3, 7.3, 7.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglas Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

CXT280 - NiMH/Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.726 mW/g

CXT280 - NiMH/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 24.1 V/m; Power Drift = -0.248 dB

Peak SAR (extrapolated) = 0.836 W/kg

SAR(1 g) = 0.589 mW/g; SAR(10 g) = 0.424 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.617 mW/g

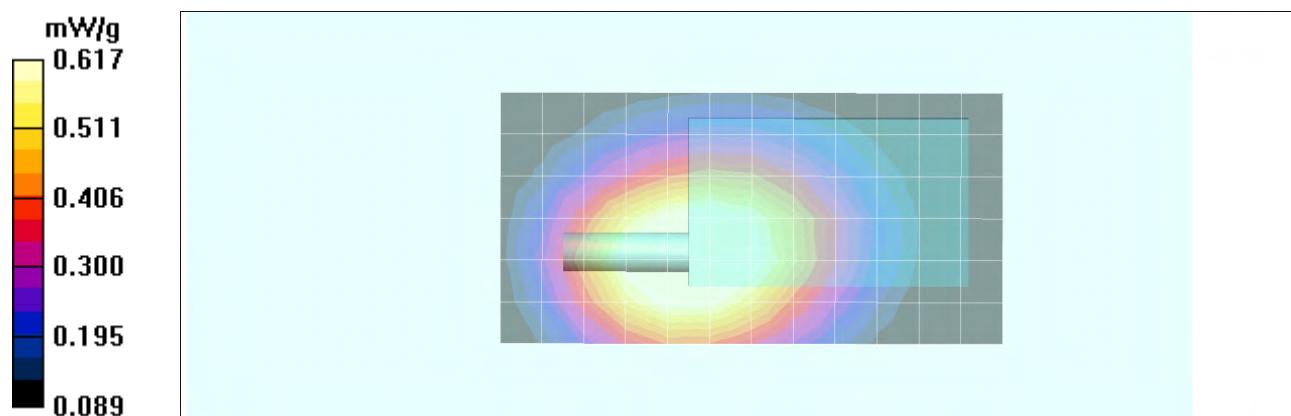

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO1122A	IC:	906A-1122A	 Cobra <small>ELectronics Corporation</small>
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver	Model(s):	CXT280, CXT235			

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 13, 2011	<u>Test Report Serial No.</u> 113011BBO-T1138-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)
	<u>Test Report Issue Date</u> Jan. 19, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled



Date Tested: 12/13/2011

Face-held SAR - GMRS - Ch. 1 - 462.5625 MHz - Energizer AAA Alkaline Batteries

DUT: Cobra; Model: CXT280; Type: Portable GMRS/FRS PTT Radio Transceiver; Serial: None

Ambient Temp: 22C; Fluid Temp: 20.8C; Barometric Pressure: 101.1 kPa; Humidity: 30%

Communication System: CW

Frequency: 462.563 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used (interpolated): $f = 462.563$ MHz; $\sigma = 0.873$ mho/m; $\epsilon_r = 44.4$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(7.3, 7.3, 7.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglas Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

CXT280 - Alkaline/Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.769 mW/g

CXT280 - Alkaline/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 27.2 V/m; Power Drift = -0.418 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.723 mW/g; SAR(10 g) = 0.521 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.754 mW/g

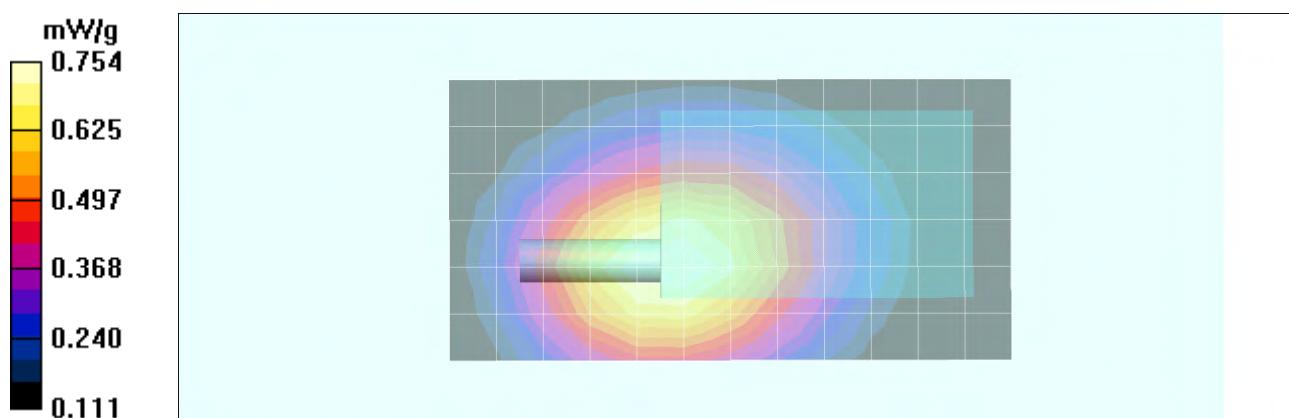


Applicant:	Cobra Electronics Corporation	FCC ID:	BBO1122A	IC:	906A-1122A	 Cobra <small>ELectromagnetic CORPORATION</small>
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver	Model(s):	CXT280, CXT235			

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 13, 2011	<u>Test Report Serial No.</u> 113011BBO-T1138-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)
	<u>Test Report Issue Date</u> Jan. 19, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled



Z-Axis Scan

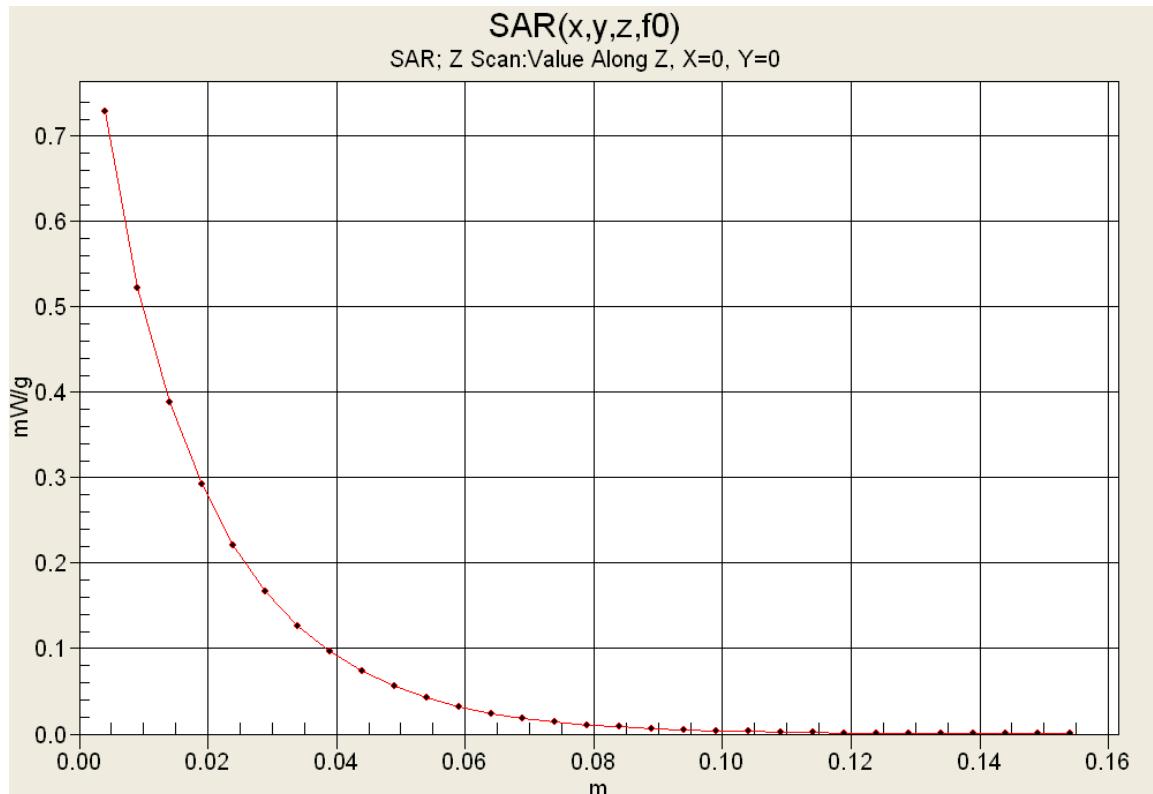

Applicant:	Cobra Electronics Corporation		FCC ID:	BBO1122A	IC:	906A-1122A	 Cobra <small>Electronics Corporation</small>
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver		Model(s):	CXT280, CXT235			
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 22 of 50		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 13, 2011	<u>Test Report Serial No.</u> 113011BBO-T1138-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)
	<u>Test Report Issue Date</u> Jan. 19, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled



Date Tested: 12/13/2011

**Body-worn SAR - GMRS - Ch. 1 - 462.5625 MHz - Ni-MH AAA Rechargeable Batteries
Plastic Belt-clip - Earbud**

DUT: Cobra; Model: CXT280; Type: Portable GMRS/FRS PTT Radio Transceiver; Serial: None

Ambient Temp: 22C; Fluid Temp: 21.4C; Barometric Pressure: 101.1 kPa; Humidity: 30%

Communication System: CW

Frequency: 462.563 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used (interpolated): $f = 462.563$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 56.7$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(7.82, 7.82, 7.82); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglas Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

CXT280 - NiMH - Belt-clip - Ear-mic/Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.482 mW/g

CXT280 - NiMH - Belt-clip - Ear-mic/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 27.7 V/m; Power Drift = -0.725 dB

Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.676 mW/g; SAR(10 g) = 0.466 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.707 mW/g

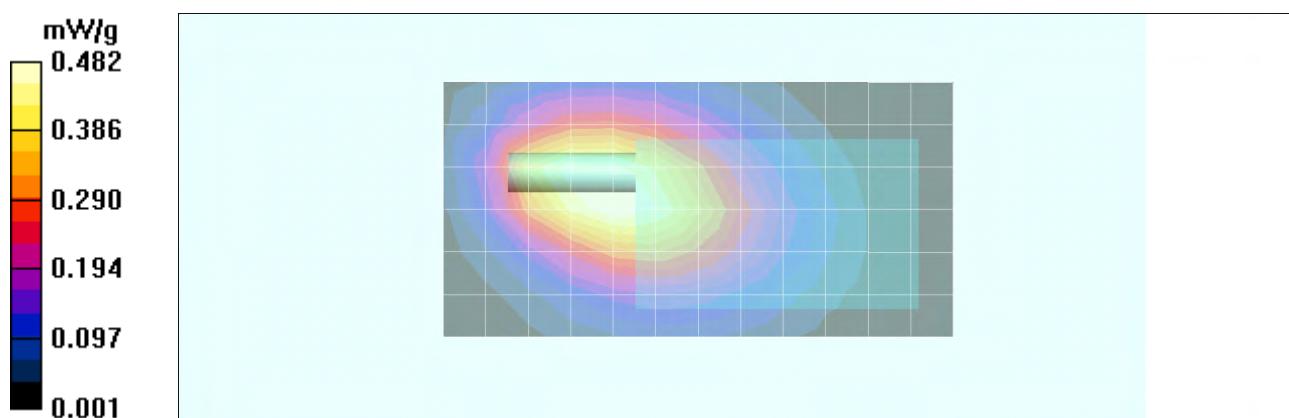

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO1122A	IC:	906A-1122A	 <small>ELectroMAGnetiC CORPORATION</small>
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver		Model(s):	CXT280, CXT235		
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 23 of 50	

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 13, 2011	<u>Test Report Serial No.</u> 113011BBO-T1138-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jan. 19, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

Date Tested: 12/13/2011

**Body-worn SAR - GMRS - Ch. 1 - 462.5625 MHz - Energizer AAA Alkaline Batteries
Plastic Belt-clip - Earbud**

DUT: Cobra; Model: CXT280; Type: Portable GMRS/FRS PTT Radio Transceiver; Serial: None

Ambient Temp: 22C; Fluid Temp: 21.4C; Barometric Pressure: 101.1 kPa; Humidity: 30%

Communication System: CW

Frequency: 462.563 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used (interpolated): $f = 462.563$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 56.7$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(7.82, 7.82, 7.82); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglas Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

CXT280 - Alkaline - Belt-clip - Ear-mic/Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.488 mW/g

CXT280 - Alkaline - Belt-clip - Ear-mic/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 28.3 V/m; Power Drift = -0.654 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.752 mW/g; SAR(10 g) = 0.508 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.795 mW/g

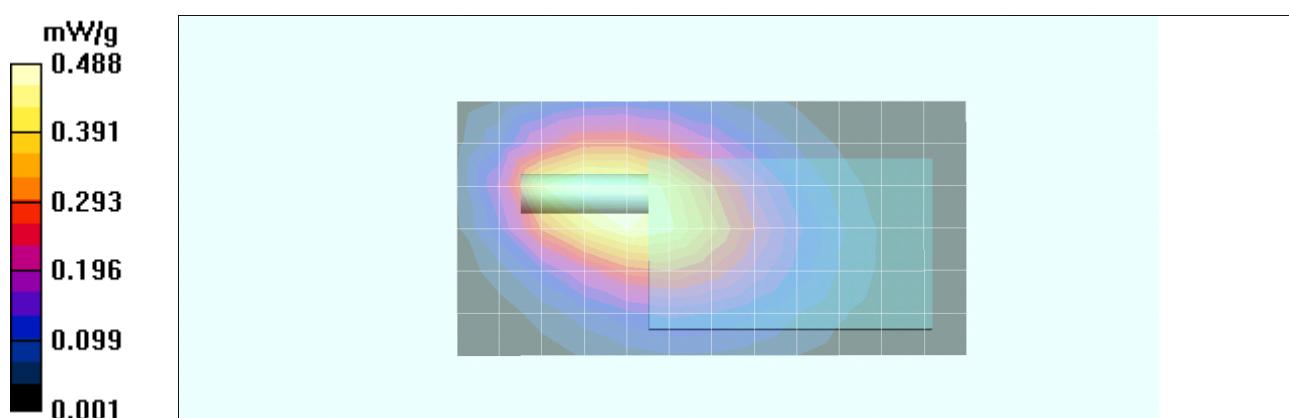


Applicant:	Cobra Electronics Corporation	FCC ID:	BBO1122A	IC:	906A-1122A		
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver		Model(s):	CXT280, CXT235			
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 24 of 50		


 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 13, 2011	<u>Test Report Serial No.</u> 113011BBO-T1138-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)
	<u>Test Report Issue Date</u> Jan. 19, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled



Z-Axis Scan

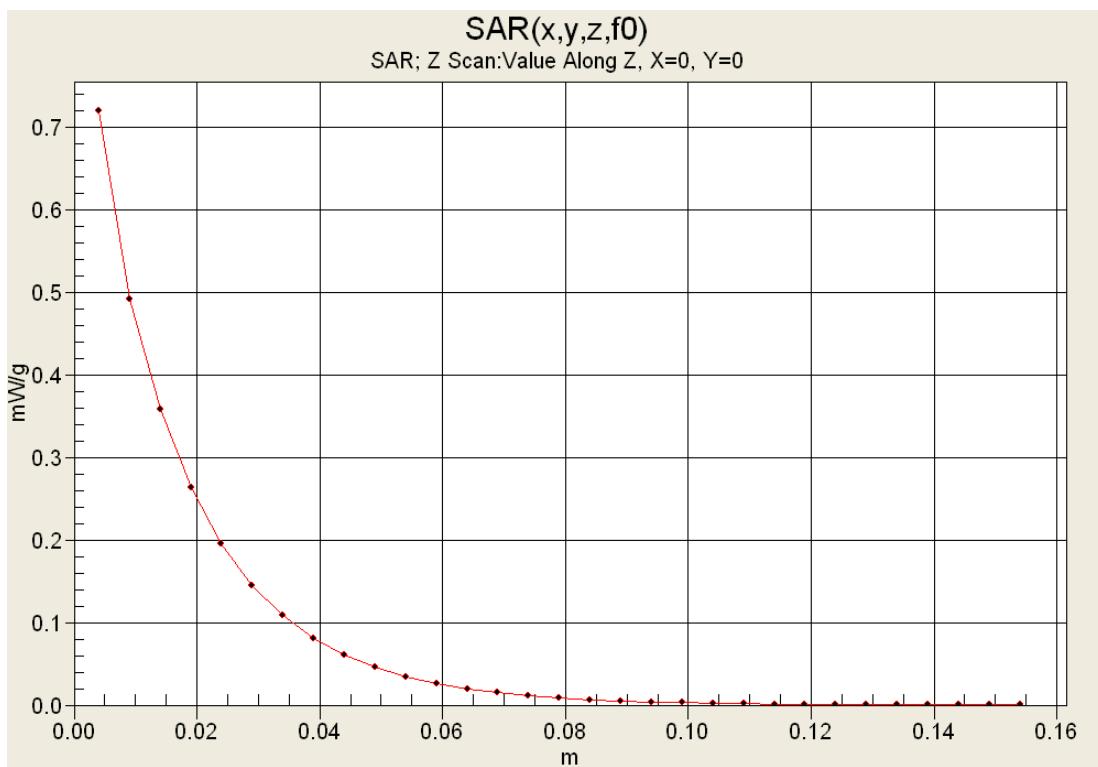

SAR vs TIME

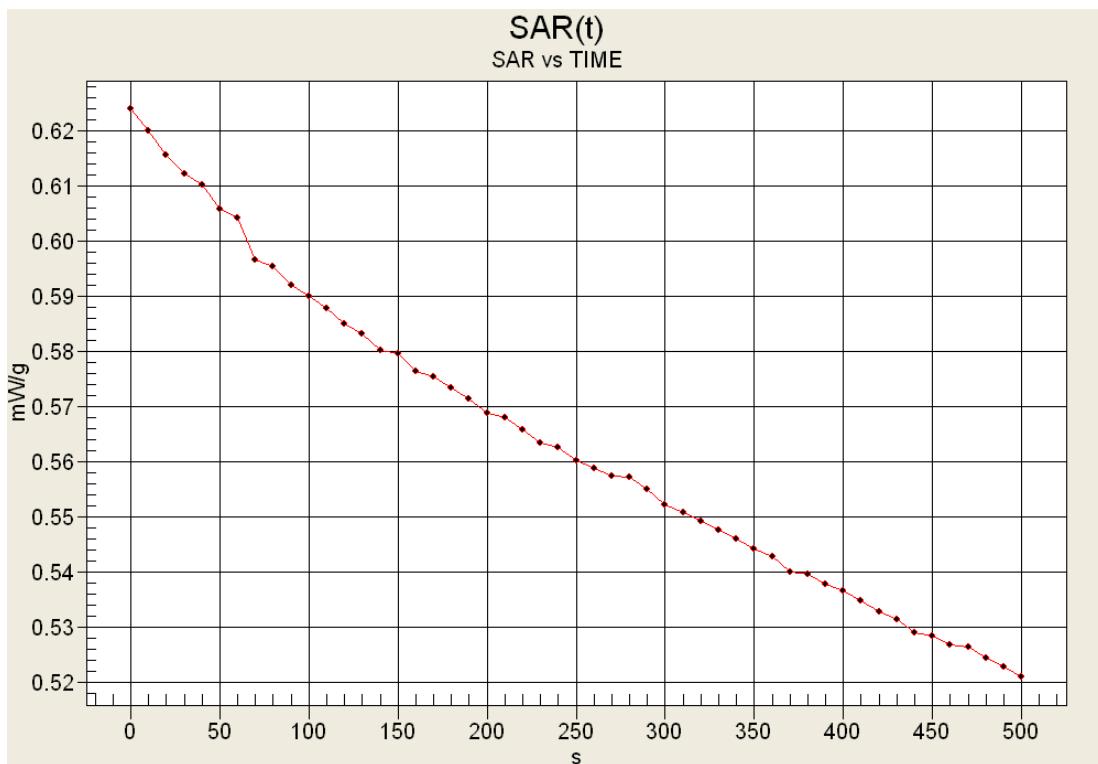

Applicant:	Cobra Electronics Corporation		FCC ID:	BBO1122A	IC:	906A-1122A	 Cobra <small>Electronics Corporation</small>
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver		Model(s):	CXT280, CXT235			
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 25 of 50		

 Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> Dec. 13, 2011	<u>Test Report Serial No.</u> 113011BBO-T1138-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jan. 19, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

Date Tested: 12/13/2011

**Body-worn SAR - GMRS - Ch. 1 - 462.5625 MHz - Energizer AAA Alkaline Batteries
Plastic Belt-clip - Earbud**

DUT: Cobra; Model: CXT235; Type: Portable GMRS/FRS PTT Radio Transceiver; Serial: None

Ambient Temp: 22C; Fluid Temp: 21.4C; Barometric Pressure: 101.1 kPa; Humidity: 30%:

Communication System: CW

Frequency: 462.563 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used (interpolated): $f = 462.563$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 56.7$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(7.82, 7.82, 7.82); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglas Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

CXT235 - Alkaline - Belt-clip - Ear-mic/Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.683 mW/g

CXT235 - Alkaline - Belt-clip - Ear-mic/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 28.6 V/m; Power Drift = -0.571 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.735 mW/g; SAR(10 g) = 0.503 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.775 mW/g

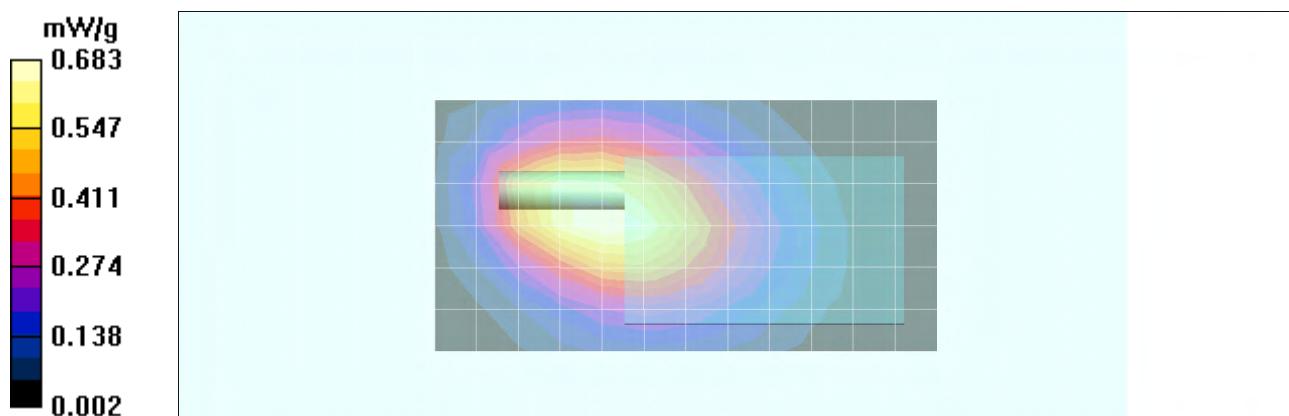


Applicant:	Cobra Electronics Corporation	FCC ID:	BBO1122A	IC:	906A-1122A	
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver	Model(s):	CXT280, CXT235			
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 26 of 50		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 13, 2011	<u>Test Report Serial No.</u> 113011BBO-T1138-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)
	<u>Test Report Issue Date</u> Jan. 19, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled



SAR vs TIME

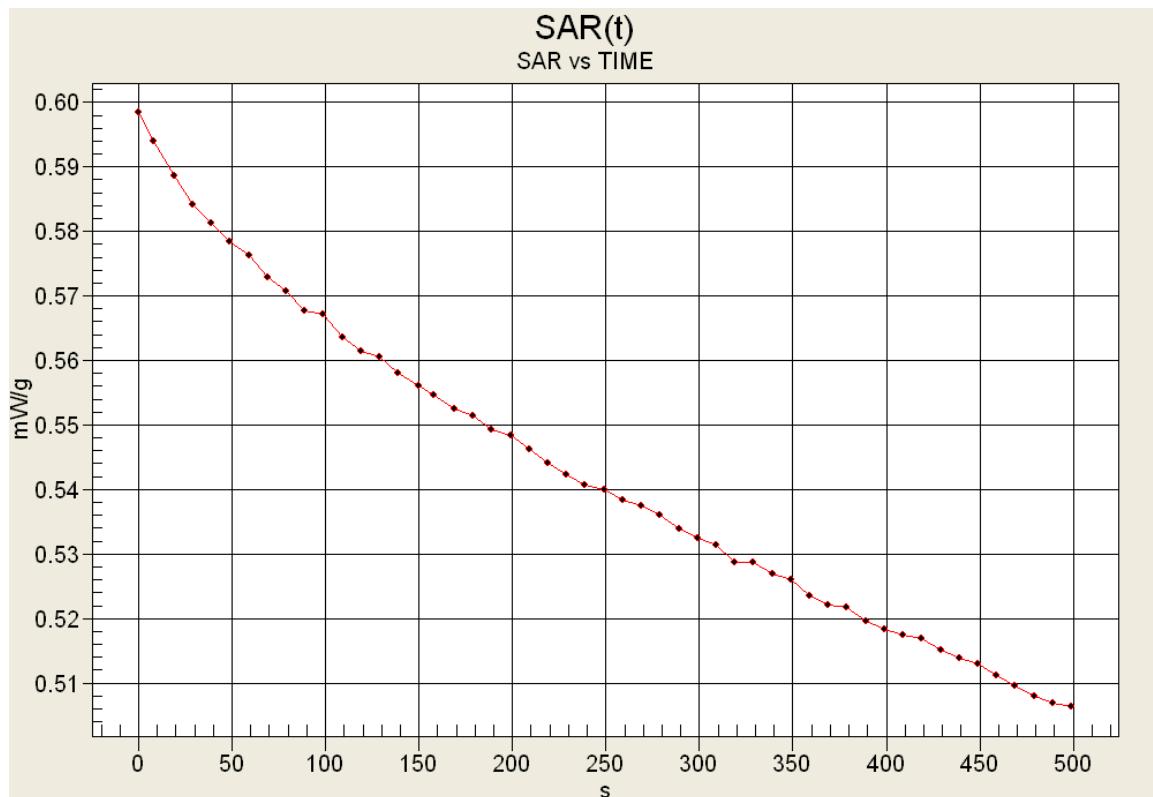

Applicant:	Cobra Electronics Corporation		FCC ID:	BBO1122A	IC:	906A-1122A	 <small>ELectronics CORPORATION</small>
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver		Model(s):	CXT280, CXT235			
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 27 of 50		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 13, 2011	<u>Test Report Serial No.</u> 113011BBO-T1138-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)
	<u>Test Report Issue Date</u> Jan. 19, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled



APPENDIX B - SYSTEM PERFORMANCE CHECK PLOTS

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO1122A	IC:	906A-1122A	 <small>ELectroMAGnetiC CORPORATiOn</small>	
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver	Model(s):	CXT280, CXT235				
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 28 of 50		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 13, 2011	<u>Test Report Serial No.</u> 113011BBO-T1138-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)
	<u>Test Report Issue Date</u> Jan. 19, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled



Date Tested: 12/12/2011

System Performance Check - 450 MHz Dipole - Head

DUT: Dipole 450 MHz; Type: D450V3; Serial: 1068; Calibrated: 01/18/2010

Ambient Temp: 22C; Fluid Temp: 21.4C; Barometric Pressure: 101.1 kPa; Humidity: 30%

Communication System: CW

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used: $f = 450$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 45.5$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(7.3, 7.3, 7.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglas Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Head d=15mm Pin=398mW/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.98 mW/g


Head d=15mm Pin=398mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 46.6 V/m; Power Drift = 0.020 dB

Peak SAR (extrapolated) = 3.01 W/kg

SAR(1 g) = 1.88 mW/g; SAR(10 g) = 1.24 mW/g


Maximum value of SAR (measured) = 2.01 mW/g

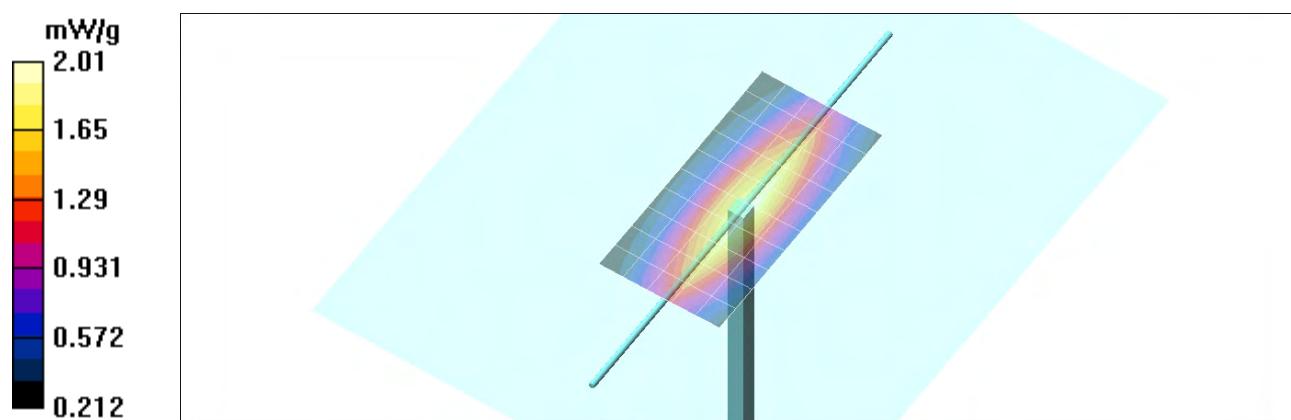

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO1122A	IC:	906A-1122A	 Cobra <small>Electronics Corporation</small>
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver	Model(s):	CXT280, CXT235			
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 29 of 50		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 13, 2011	<u>Test Report Serial No.</u> 113011BBO-T1138-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jan. 19, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

Z-Axis Scan

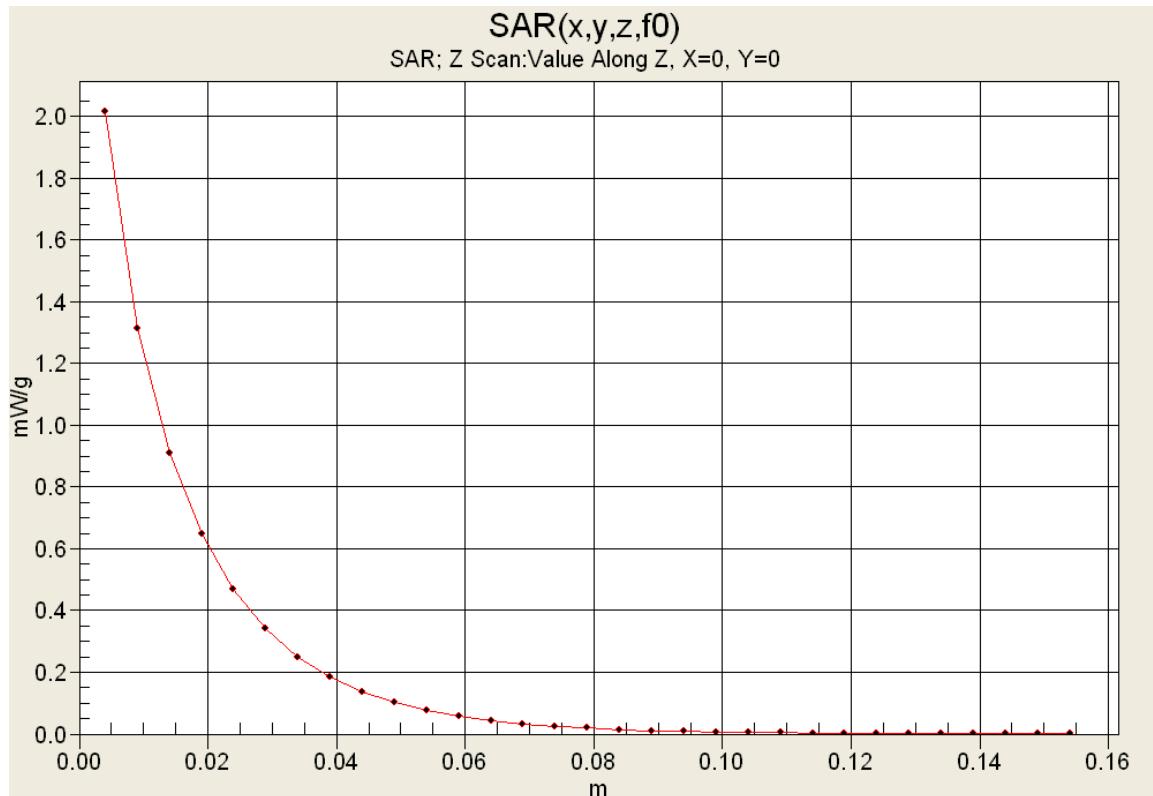

Applicant:	Cobra Electronics Corporation		FCC ID:	BBO1122A	IC:	906A-1122A	 Cobra <small>Electronics Corporation</small>
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver		Model(s):	CXT280, CXT235			
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 30 of 50		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 13, 2011	<u>Test Report Serial No.</u> 113011BBO-T1138-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)
	<u>Test Report Issue Date</u> Jan. 19, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled



Date Tested: 12/12/2011

System Performance Check - 450 MHz Dipole - Body

DUT: Dipole 450 MHz; Type: D450V3; Serial: 1068; Calibrated: 01/18/2010

Ambient Temp: 22C; Fluid Temp: 21.7C; Barometric Pressure: 101.1 kPa; Humidity: 30%

Communication System: CW

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used: $f = 450$ MHz; $\sigma = 0.91$ mho/m; $\epsilon_r = 56.8$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(7.82, 7.82, 7.82); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglas Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body d=15mm Pin=398mW/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.82 mW/g


Body d=15mm Pin=398mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 44.0 V/m; Power Drift = -0.008 dB

Peak SAR (extrapolated) = 2.80 W/kg

SAR(1 g) = 1.73 mW/g; SAR(10 g) = 1.14 mW/g

Maximum value of SAR (measured) = 1.84 mW/g

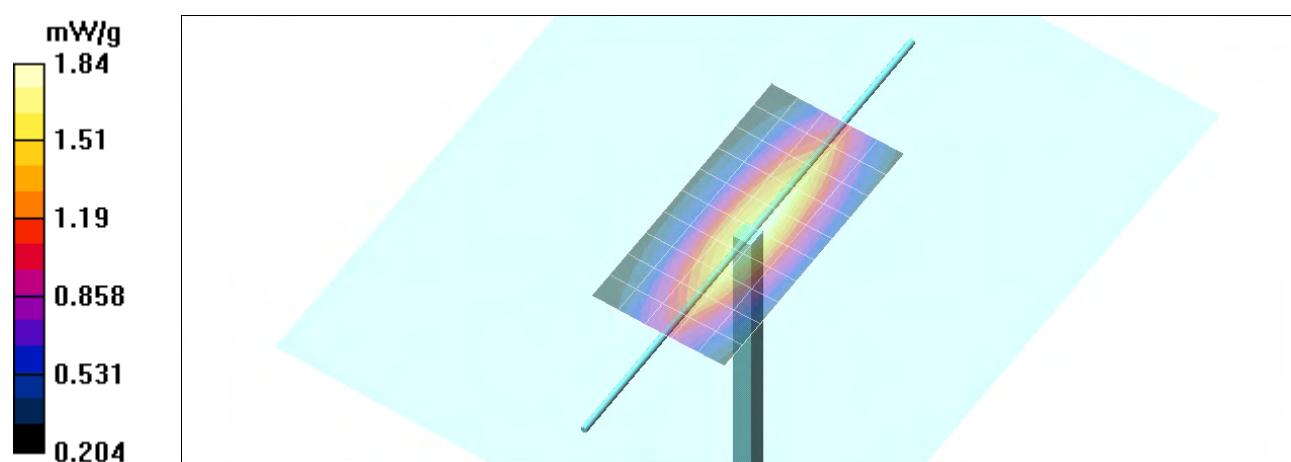


Applicant:	Cobra Electronics Corporation	FCC ID:	BBO1122A	IC:	906A-1122A	 Cobra <small>Electronics Corporation</small>
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver	Model(s):	CXT280, CXT235			
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 31 of 50

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 13, 2011	<u>Test Report Serial No.</u> 113011BBO-T1138-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)
	<u>Test Report Issue Date</u> Jan. 19, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled



Z-Axis Scan

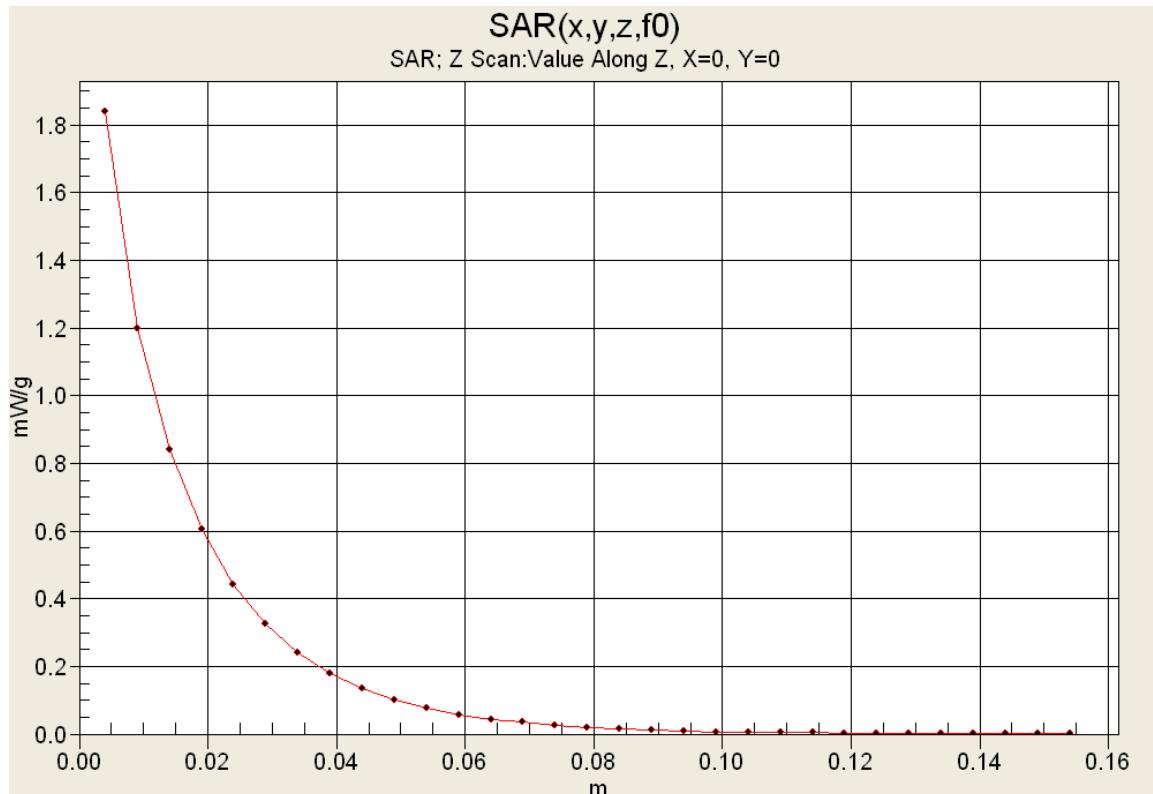

Applicant:	Cobra Electronics Corporation		FCC ID:	BBO1122A	IC:	906A-1122A	 Cobra <small>Electronics Corporation</small>
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver		Model(s):	CXT280, CXT235			
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 32 of 50		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 13, 2011	<u>Test Report Serial No.</u> 113011BBO-T1138-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)
	<u>Test Report Issue Date</u> Jan. 19, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled



APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO1122A	IC:	906A-1122A	 <small>COBRA ELECTRONICS CORPORATION</small>	
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver		Model(s):	CXT280, CXT235			
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 33 of 50		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 13, 2011	<u>Test Report Serial No.</u> 113011BBO-T1138-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)
	<u>Test Report Issue Date</u> Jan. 19, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled



450 MHz Head

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

12/Dec/2011

Frequency (GHz)

FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
 FCC_sH FCC OET 65 Supplement C (June 2001) Limits for Head Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eHFCC	FCC_sH	Test_e	Test_s
0.3500	44.70	0.87	47.83	0.77
0.3600	44.58	0.87	47.78	0.78
0.3700	44.46	0.87	47.18	0.80
0.3800	44.34	0.87	47.26	0.81
0.3900	44.22	0.87	46.74	0.83
0.4000	44.10	0.87	46.73	0.82
0.4100	43.98	0.87	45.89	0.83
0.4200	43.86	0.87	45.71	0.83
0.4300	43.74	0.87	45.59	0.86
0.4400	43.62	0.87	45.55	0.87
0.4500	43.50	0.87	45.45	0.88
0.4600	43.45	0.87	45.05	0.88
0.4700	43.40	0.87	45.35	0.88
0.4800	43.34	0.87	44.82	0.89
0.4900	43.29	0.87	44.24	0.91
0.5000	43.24	0.87	44.22	0.91
0.5100	43.19	0.87	44.63	0.92
0.5200	43.14	0.88	43.99	0.92
0.5300	43.08	0.88	43.96	0.94
0.5400	43.03	0.88	43.63	0.94
0.5500	42.98	0.88	43.65	0.97

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO1122A	IC:	906A-1122A	 <small>ELectronics Corporation</small>	
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver		Model(s):	CXT280, CXT235			
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 34 of 50		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 13, 2011	<u>Test Report Serial No.</u> 113011BBO-T1138-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)
	<u>Test Report Issue Date</u> Jan. 19, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled



450 MHz Body

 Celltech Labs Inc.
 Test Result for UIM Dielectric Parameter
 12/Dec/2011
 Frequency (GHz)
 FCC_eB FCC Limits for Body Epsilon
 FCC_sB FCC Limits for Body Sigma
 Test_e Epsilon of UIM
 Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.3500	57.70	0.93	58.68	0.83
0.3600	57.60	0.93	58.28	0.83
0.3700	57.50	0.93	57.92	0.84
0.3800	57.40	0.93	58.22	0.86
0.3900	57.30	0.93	57.87	0.88
0.4000	57.20	0.93	57.83	0.87
0.4100	57.10	0.93	57.40	0.87
0.4200	57.00	0.94	57.29	0.89
0.4300	56.90	0.94	57.38	0.90
0.4400	56.80	0.94	57.08	0.91
0.4500	56.70	0.94	56.76	0.91
0.4600	56.66	0.94	57.09	0.91
0.4700	56.62	0.94	56.92	0.92
0.4800	56.58	0.94	56.97	0.93
0.4900	56.54	0.94	56.54	0.94
0.5000	56.51	0.94	56.46	0.95
0.5100	56.47	0.94	56.72	0.96
0.5200	56.43	0.95	56.20	0.95
0.5300	56.39	0.95	55.80	0.97
0.5400	56.35	0.95	55.82	1.00
0.5500	56.31	0.95	55.85	1.00

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO1122A	IC:	906A-1122A	 Cobra <small>ELectronics Corporation</small>
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver	Model(s):	CXT280, CXT235			
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 35 of 50	

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 13, 2011	<u>Test Report Serial No.</u> 113011BBO-T1138-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)
	<u>Test Report Issue Date</u> Jan. 19, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled



450 MHz Head

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

13/Dec/2011

Frequency (GHz)

FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon

FCC_sH FCC OET 65 Supplement C (June 2001) Limits for Head Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eHFCC	FCC_sH	Test_e	Test_s
0.3500	44.70	0.87	47.36	0.77
0.3600	44.58	0.87	47.15	0.77
0.3700	44.46	0.87	45.91	0.78
0.3800	44.34	0.87	45.54	0.79
0.3900	44.22	0.87	45.28	0.81
0.4000	44.10	0.87	45.62	0.81
0.4100	43.98	0.87	45.61	0.82
0.4200	43.86	0.87	44.71	0.83
0.4300	43.74	0.87	45.55	0.83
0.4400	43.62	0.87	44.72	0.85
0.4500	43.50	0.87	44.48	0.86
0.4600	43.45	0.87	44.38	0.87
0.4700	43.40	0.87	44.37	0.88
0.4800	43.34	0.87	43.98	0.87
0.4900	43.29	0.87	43.69	0.89
0.5000	43.24	0.87	43.78	0.89
0.5100	43.19	0.87	43.58	0.90
0.5200	43.14	0.88	43.28	0.92
0.5300	43.08	0.88	43.05	0.93
0.5400	43.03	0.88	42.71	0.93
0.5500	42.98	0.88	42.80	0.95

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO1122A	IC:	906A-1122A	 <small>ELectronics Corporation</small>	
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver	Model(s):	CXT280, CXT235				
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 36 of 50		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 13, 2011	<u>Test Report Serial No.</u> 113011BBO-T1138-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jan. 19, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

450 MHz Body

Celltech Labs Inc.
 Test Result for UIM Dielectric Parameter
 13/Dec/2011
 Frequency (GHz)
 FCC_eB FCC Limits for Body Epsilon
 FCC_sB FCC Limits for Body Sigma
 Test_e Epsilon of UIM
 Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.3500	57.70	0.93	58.99	0.83
0.3600	57.60	0.93	58.67	0.83
0.3700	57.50	0.93	58.58	0.85
0.3800	57.40	0.93	57.78	0.86
0.3900	57.30	0.93	57.32	0.86
0.4000	57.20	0.93	57.65	0.88
0.4100	57.10	0.93	57.39	0.87
0.4200	57.00	0.94	57.57	0.88
0.4300	56.90	0.94	57.75	0.90
0.4400	56.80	0.94	57.25	0.90
0.4500	56.70	0.94	56.93	0.92
0.4600	56.66	0.94	56.70	0.93
0.4700	56.62	0.94	56.67	0.93
0.4800	56.58	0.94	56.56	0.93
0.4900	56.54	0.94	56.37	0.94
0.5000	56.51	0.94	56.67	0.95
0.5100	56.47	0.94	56.09	0.95
0.5200	56.43	0.95	56.06	0.96
0.5300	56.39	0.95	55.88	0.98
0.5400	56.35	0.95	55.39	0.99
0.5500	56.31	0.95	55.87	1.01

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO1122A	IC:	906A-1122A	 Cobra <small>TELECOMMUNICATIONS</small>
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver	Model(s):	CXT280, CXT235			
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 37 of 50	

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 13, 2011	<u>Test Report Serial No.</u> 113011BBO-T1138-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)
	<u>Test Report Issue Date</u> Jan. 19, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled




APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO1122A	IC:	906A-1122A	 <small>ELectroMAGnetiC CORPORATION</small>	
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver		Model(s):	CXT280, CXT235			
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 38 of 50		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 13, 2011	<u>Test Report Serial No.</u> 113011BBO-T1138-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jan. 19, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

FACE-HELD SAR TEST SETUP PHOTOGRAPHS

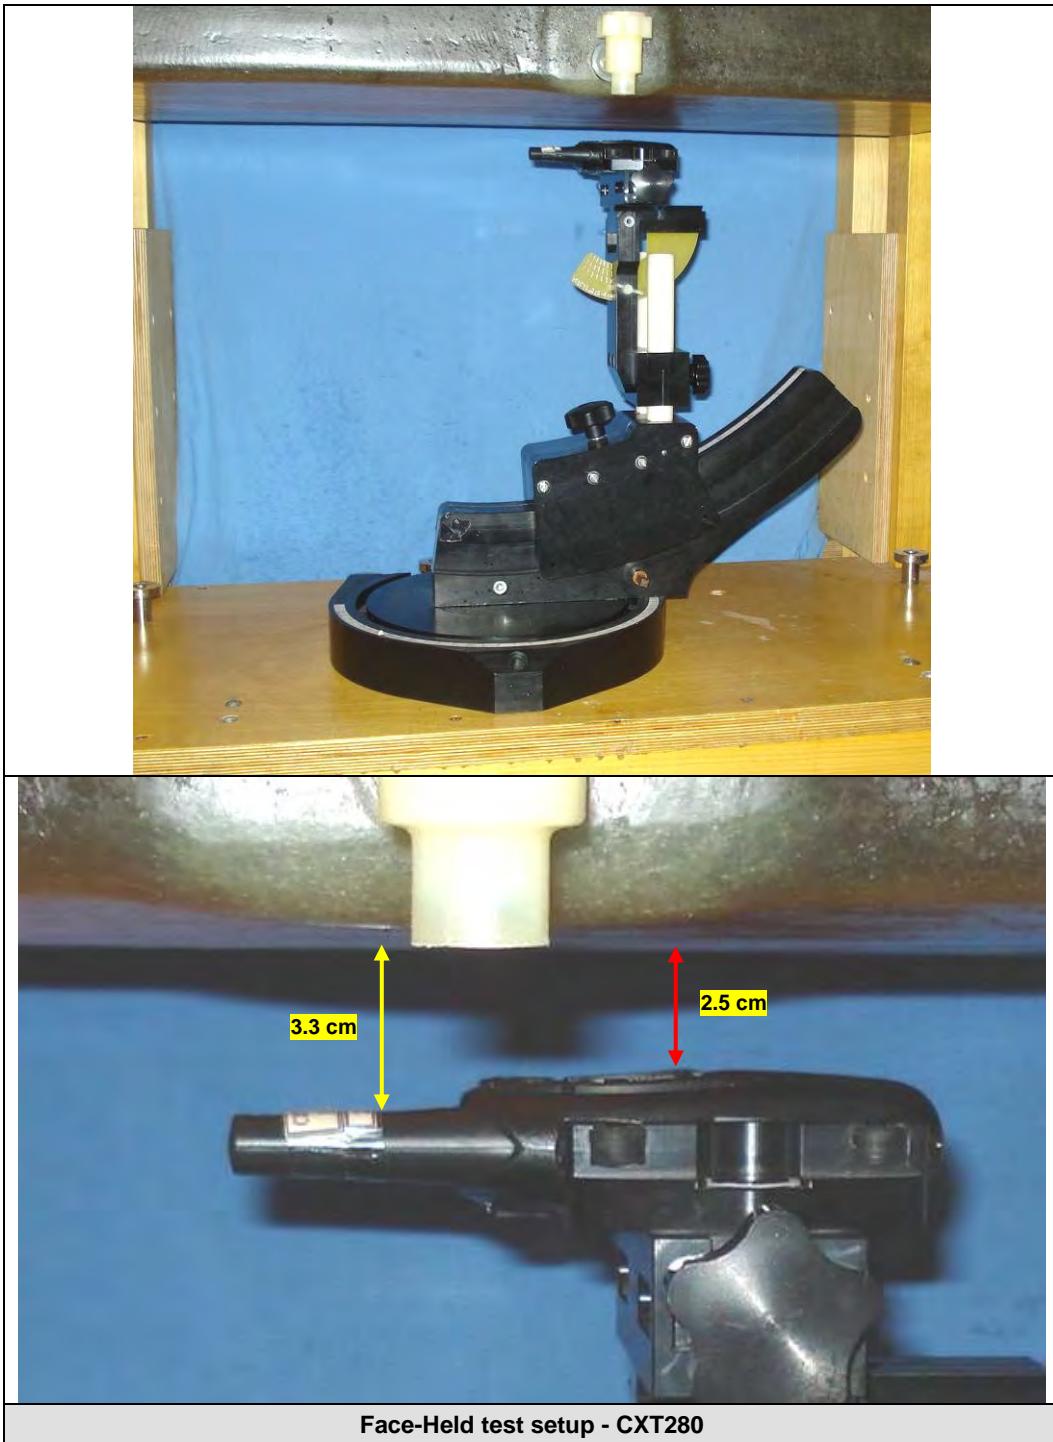

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO1122A	IC:	906A-1122A						
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver	Model(s):	CXT280, CXT235								
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.										
	Page 39 of 50										



Date(s) of Evaluation
Dec. 13, 2011

Test Report Issue Date
Jan. 19, 2012

Test Report Serial No.
113011BBO-T1138-S95U


Test Report Revision No.
Rev. 1.1 (2nd Release)

Description of Test(s)
Specific Absorption Rate

RF Exposure Category
Gen. Pop. / Uncontrolled



BODY-WORN SAR TEST SETUP PHOTOGRAPHS

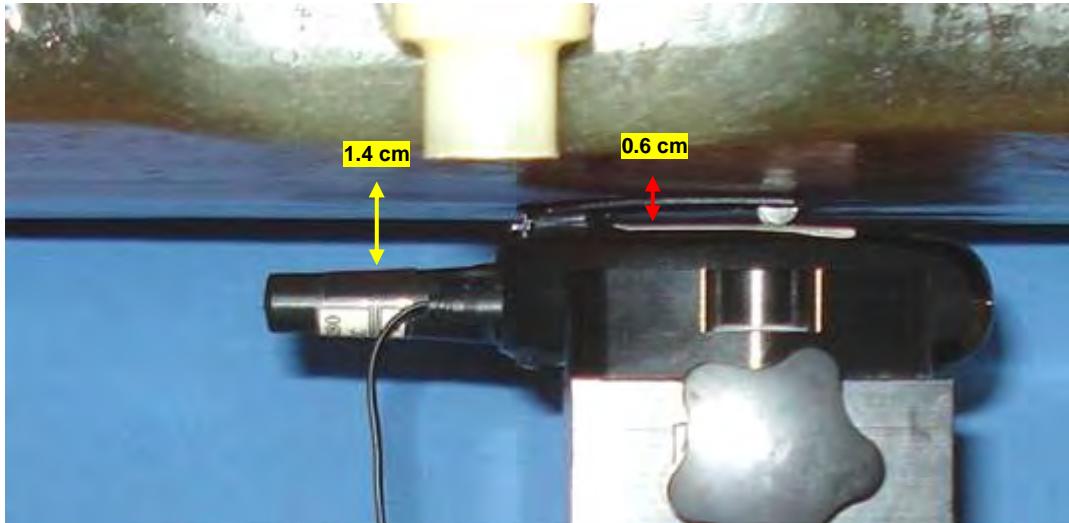


Body-worn test setup - CXT280 - Belt-clip - Earbud

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO1122A	IC:	906A-1122A	
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver	Model(s):	CXT280, CXT235			
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 40 of 50	

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 13, 2011	<u>Test Report Serial No.</u> 113011BBO-T1138-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)
	<u>Test Report Issue Date</u> Jan. 19, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled



BODY-WORN SAR TEST SETUP PHOTOGRAPHS

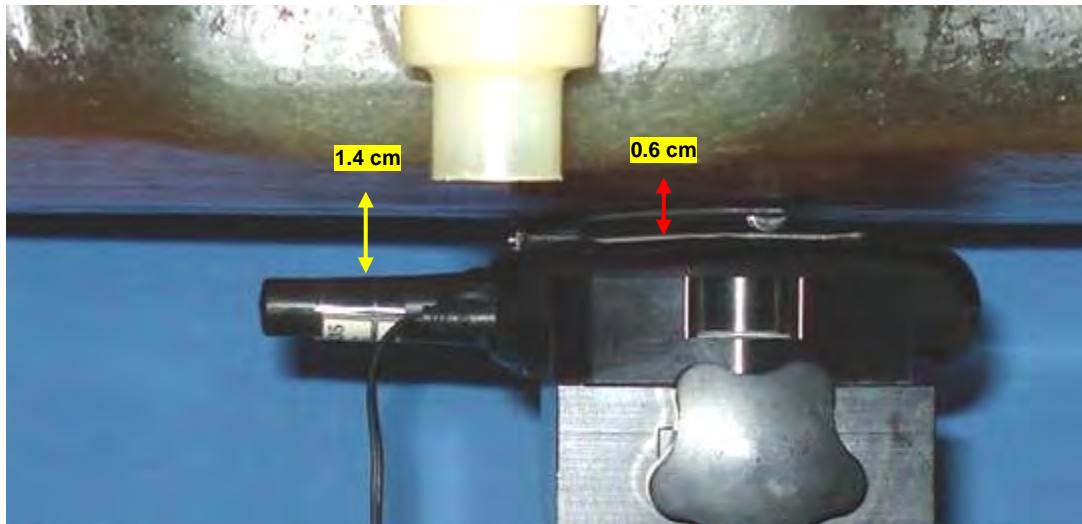

Body-worn test setup - CXT235 - Belt-clip - Earbud

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO1122A	IC:	906A-1122A	 Cobra <small>ELectronics Corporation</small>
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver	Model(s):	CXT280, CXT235			

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 13, 2011	<u>Test Report Serial No.</u> 113011BBO-T1138-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jan. 19, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

DUT PHOTOGRAPHS

			
CXT280 – Front side	CXT280 - Left side	CXT280 – Back side	CXT280 - Right side
			
CXT280 – Top end		CXT280 – Bottom end	

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO1122A	IC:	906A-1122A			
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver		Model(s):	CXT280, CXT235				
2012 Celltech Labs Inc.						This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.		
						Page 42 of 50		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 13, 2011	<u>Test Report Serial No.</u> 113011BBO-T1138-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jan. 19, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

DUT PHOTOGRAPHS

			
CXT235 – Front side	CXT235 - Left side	CXT235 – Back side	CXT235 - Right side
			
CXT235 – Top end		CXT235 – Bottom end	

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO1122A	IC:	906A-1122A	
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver			Model(s):	CXT280, CXT235	
2012 Celltech Labs Inc.						Page 43 of 50

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 13, 2011	<u>Test Report Serial No.</u> 113011BBO-T1138-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)
	<u>Test Report Issue Date</u> Jan. 19, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled



DUT PHOTOGRAPHS



DUT with Plastic Belt-clip

Applicant:	Cobra Electronics Corporation		FCC ID:	BBO1122A	IC:	906A-1122A	 <small>COBRA ELECTRONICS CORPORATION</small>	
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver		Model(s):	CXT280, CXT235				
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 44 of 50			

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 13, 2011	<u>Test Report Serial No.</u> 113011BBO-T1138-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 ilac-MRA <small>ACCREDITED</small>
	<u>Test Report Issue Date</u> Jan. 19, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

Test Lab Certificate No. 2470.01

DUT PHOTOGRAPHS

		
DUT Battery Housing	DUT with Ni-MH AAA Batteries	DUT with Alkaline AAA Batteries

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO1122A	IC:	906A-1122A	 Cobra <small>TELECOMMUNICATIONS</small>
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver	Model(s):	CXT280, CXT235			

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 13, 2011	<u>Test Report Serial No.</u> 113011BBO-T1138-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)
	<u>Test Report Issue Date</u> Jan. 19, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled



DUT PHOTOGRAPHS



Applicant:	Cobra Electronics Corporation		FCC ID:	BBO1122A	IC:	906A-1122A	
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver		Model(s):	CXT280, CXT235			
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 46 of 50		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 13, 2011	<u>Test Report Serial No.</u> 113011BBO-T1138-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)
	<u>Test Report Issue Date</u> Jan. 19, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled



DUT PHOTOGRAPHS



DUT with Ear-bud Lapel-Microphone Audio Accessory (P/N: GA-EBM2)

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO1122A	IC:	906A-1122A	
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver	Model(s):	CXT280, CXT235			

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 13, 2011	<u>Test Report Serial No.</u> 113011BBO-T1138-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)
	<u>Test Report Issue Date</u> Jan. 19, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled



APPENDIX E - DIPOLE CALIBRATION

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO1122A	IC:	906A-1122A	 <small>ELectroMAGnetiC CORPORATION</small>	
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver		Model(s):	CXT280, CXT235			
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 48 of 50		



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Client **Celltech**

Certificate No: **D450V3-1068_Jan10**

CALIBRATION CERTIFICATE

Object **D450V3 - SN: 1068**

Calibration procedure(s) **QA CAL-15.v5**
Calibration Procedure for dipole validation kits below 800 MHz

Calibration date: **January 18, 2010**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-09 (No. 217-01030)	Apr-10
Power sensor E4412A	MY41495277	1-Apr-09 (No. 217-01030)	Apr-10
Power sensor E4412A	MY41498087	1-Apr-09 (No. 217-01030)	Apr-10
Reference 3 dB Attenuator	SN: S5054 (3c)	31-Mar-09 (No. 217-01026)	Mar-10
Reference 20 dB Attenuator	SN: S5086 (20b)	31-Mar-09 (No. 217-01028)	Mar-10
Type-N mismatch combination	SN: 5047.2 / 06327	31-Mar-09 (No. 217-01029)	Mar-10
Reference Probe ET3DV6 (LF)	SN: 1507	03-Jul-09 (No. ET3-1507_Jul09)	Jul-10
DAE4	SN: 654	04-May-09 (No. DAE4-654_May09)	May-10
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	04-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-09)	In house check: Oct-10

Calibrated by: **Jeton Kastrati** **Laboratory Technician**

i.V. (Signature)

Approved by: **Katja Pokovic** **Technical Manager**

K.P. (Signature)

Issued: January 20, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TS	tissue simulating liquid
ConF	sensitivity in TS / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY4 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TS:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TS parameters:* The measured TS parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V5.2
Extrapolation	Advanced Extrapolation	
Phantom	ELI4 Flat Phantom	Shell thickness: 2 ± 0.2 mm
Distance Dipole Center - TSL	15 mm	with Spacer
Area Scan Resolution	dx, dy = 15 mm	
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	450 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	43.5	0.87 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	44.2 ± 6 %	0.86 mho/m ± 6 %
Head TSL temperature during test	(22.0 ± 0.2) °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	condition	
SAR measured	398 mW input power	1.87 mW / g
SAR normalized	normalized to 1W	4.70 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	4.76 mW / g ± 18.1 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	398 mW input power	1.25 mW / g
SAR normalized	normalized to 1W	3.14 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	3.17 mW / g ± 17.6 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	56.7	0.94 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	54.1 ± 6 %	0.90 mho/m ± 6 %
Body TSL temperature during test	(22.0 ± 0.2) °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	condition	
SAR measured	398 mW input power	1.78 mW / g
SAR normalized	normalized to 1W	4.47 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	4.58 mW / g ± 18.1 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	398 mW input power	1.19 mW / g
SAR normalized	normalized to 1W	2.99 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	3.06 mW / g ± 17.6 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	57.5 Ω - 5.9 $j\Omega$
Return Loss	-21.0 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	54.8 Ω - 9.3 $j\Omega$
Return Loss	-20.0 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.350 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	July 16, 2009

DASY5 Validation Report for Head TSL

Date/Time: 1/18/2010 10:59:37 AM

DUT: Dipole 450 MHz; Type: D450V3; Serial: D450V3 - SN:1068

Communication System: CW; Frequency: 450 MHz; Duty Cycle: 1:1

Medium: HSL450

Medium parameters used: $f = 450$ MHz; $\sigma = 0.86$ mho/m; $\epsilon_r = 44.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ET3DV6 - SN1507 (LF); ConvF(6.66, 6.66, 6.66); Calibrated: 7/3/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn654; Calibrated: 5/4/2009
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1003
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 57

Head/d=15mm, Pin=398mW/Area Scan (41x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.99 mW/g


Head/d=15mm, Pin=398mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 50.2 V/m; Power Drift = -0.020 dB


Peak SAR (extrapolated) = 2.78 W/kg

SAR(1 g) = 1.87 mW/g; SAR(10 g) = 1.25 mW/g

Maximum value of SAR (measured) = 2 mW/g

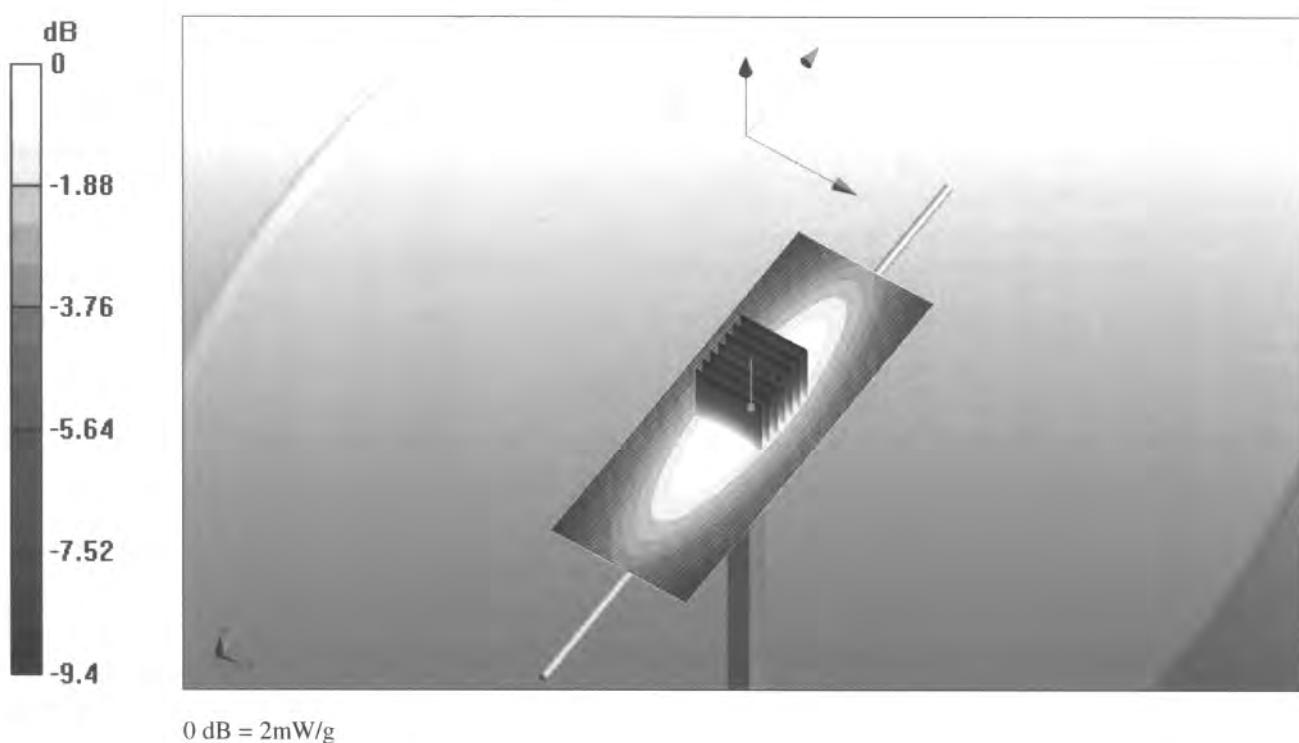

Impedance Measurement Plot for Head TSL

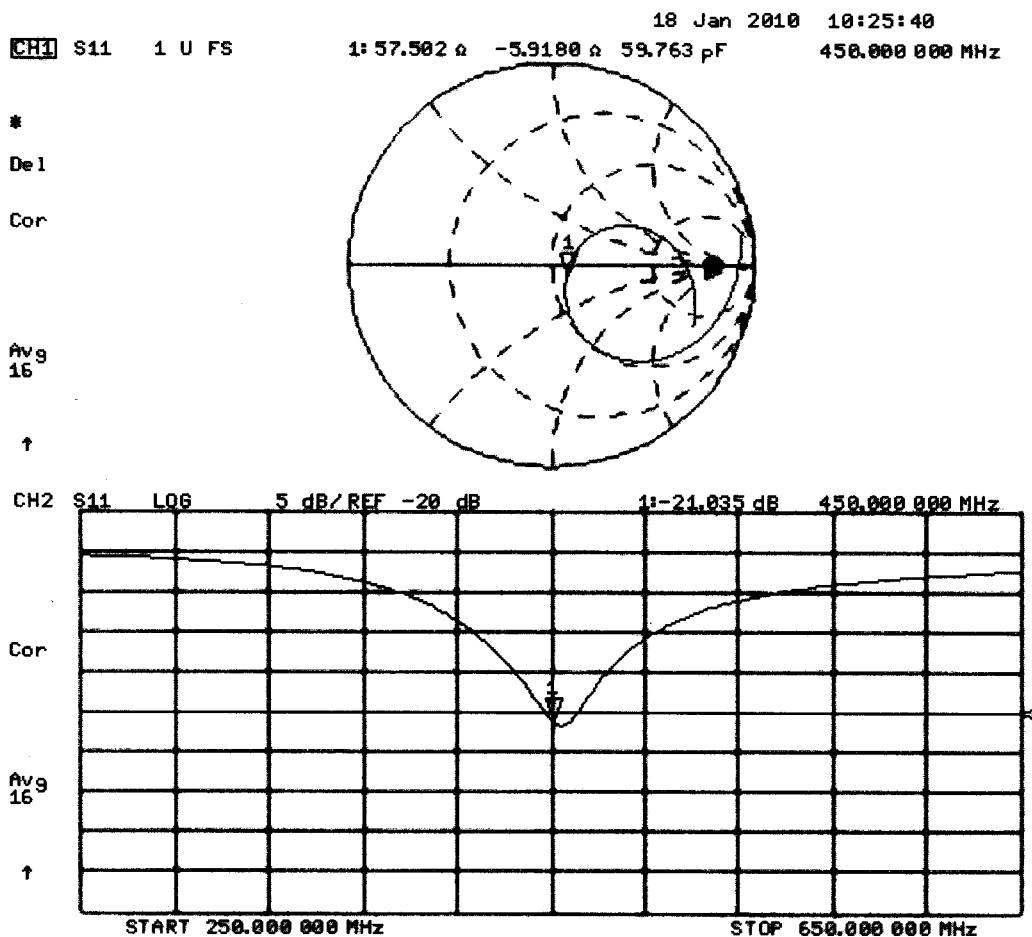

DUT: Dipole 450 MHz; Type: D450V3; Serial: D450V3 - SN:1068

Communication System: CW; Frequency: 450 MHz; Duty Cycle: 1:1

Medium: MSL450

Medium parameters used: $f = 450$ MHz; $\sigma = 0.9$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ET3DV6 - SN1507 (LF); ConvF(7.11, 7.11, 7.11); Calibrated: 7/3/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn654; Calibrated: 5/4/2009
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1003
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 57

Body/d=15mm, Pin=398mW/Area Scan (61x201x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.9 mW/g


Body/d=15mm, Pin=398mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 47.4 V/m; Power Drift = -0.034 dB


Peak SAR (extrapolated) = 2.71 W/kg

SAR(1 g) = 1.78 mW/g; SAR(10 g) = 1.19 mW/g

Maximum value of SAR (measured) = 1.9 mW/g

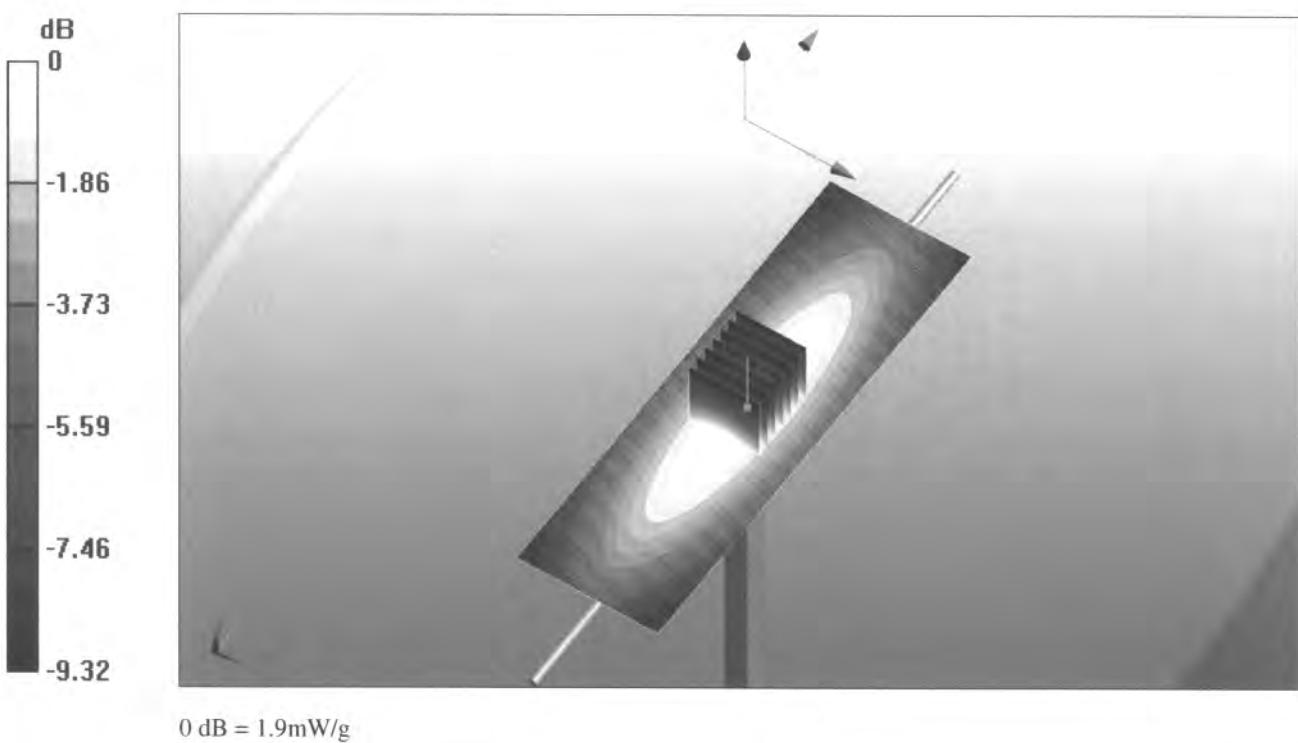

Impedance Measurement Plot for Body TSL

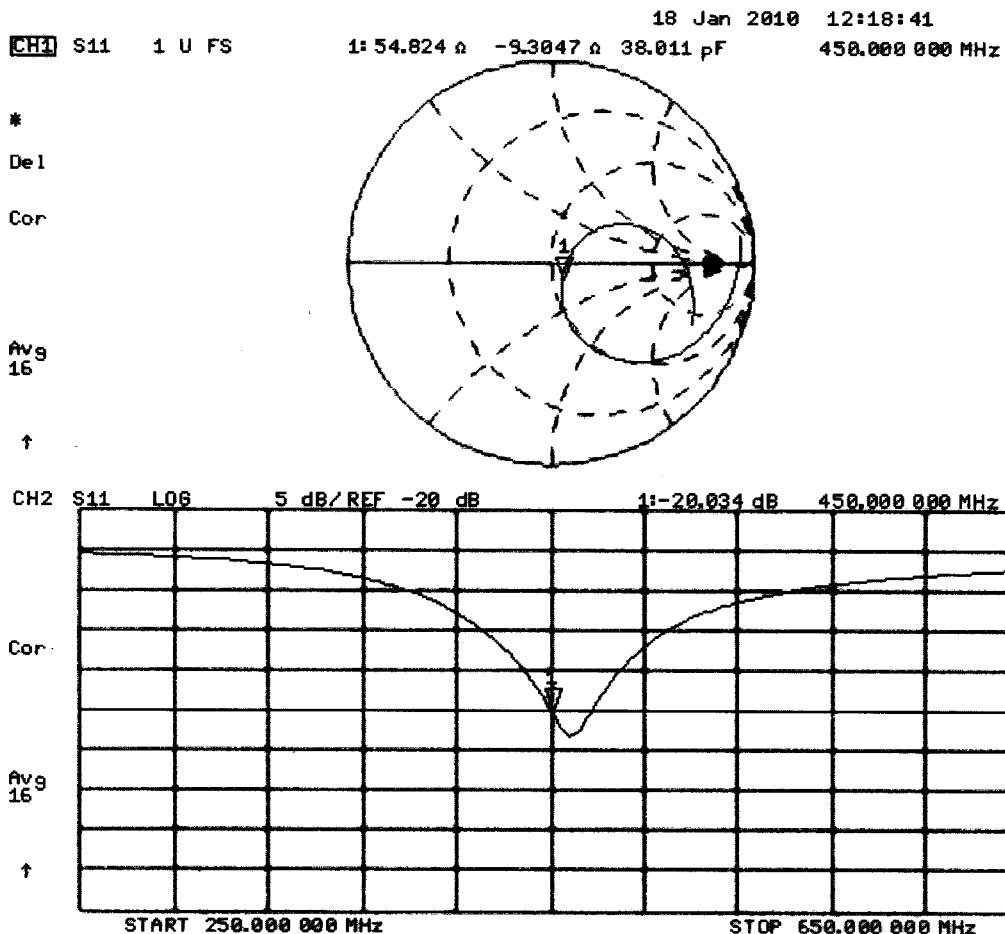

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 13, 2011	<u>Test Report Serial No.</u> 113011BBO-T1138-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)
	<u>Test Report Issue Date</u> Jan. 19, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled



APPENDIX F - PROBE CALIBRATION

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO1122A	IC:	906A-1122A	 <small>ELectroMAGnetiC CORPORATiOn</small>	
DUT Type:	Portable UHF GMRS/FRS PTT Radio Transceiver	Model(s):	CXT280, CXT235				
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 49 of 50		



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Client **Celltech**

Certificate No: **ET3-1590_Jun11**

CALIBRATION CERTIFICATE

Object **ET3DV6 - SN:1590**

Calibration procedure(s) **QA CAL-01.v8, QA CAL-12.v7, QA CAL-23.v4, QA CAL-25.v4**
 Calibration procedure for dosimetric E-field probes

Calibration date: **June 22, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	31-Mar-11 (No. 217-01372)	Apr-12
Power sensor E4412A	MY41498087	31-Mar-11 (No. 217-01372)	Apr-12
Reference 3 dB Attenuator	SN: S5054 (3c)	29-Mar-11 (No. 217-01369)	Apr-12
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-11 (No. 217-01367)	Apr-12
Reference 30 dB Attenuator	SN: S5129 (30b)	29-Mar-11 (No. 217-01370)	Apr-12
Reference Probe ES3DV2	SN: 3013	29-Dec-10 (No. ES3-3013_Dec10)	Dec-11
DAE4	SN: 654	3-May-11 (No. DAE4-654_May11)	May-12
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

Calibrated by:	Name	Function	Signature
	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: June 23, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = **NORM_{x,y,z}** * *frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCPx,y,z**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; VR_{x,y,z}**: A, B, C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to **NORM_{x,y,z}** * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe ET3DV6

SN:1590

Manufactured: March 19, 2001
Calibrated: June 22, 2011

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: ET3DV6 - SN:1590

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	1.93	2.00	1.66	$\pm 10.1\%$
DCP (mV) ^B	96.0	98.7	88.6	

Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dB	C dB	VR mV	Unc ^E (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	104.2	$\pm 2.7\%$
			Y	0.00	0.00	1.00	117.7	
			Z	0.00	0.00	1.00	129.9	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: ET3DV6 - SN:1590

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
450	43.5	0.87	7.30	7.30	7.30	0.18	2.10	± 13.4 %
835	41.5	0.90	6.50	6.50	6.50	0.38	2.55	± 12.0 %
900	41.5	0.97	6.39	6.39	6.39	0.39	2.47	± 12.0 %

^c Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

DASY/EASY - Parameters of Probe: ET3DV6- SN:1590

Calibration Parameter Determined in Body Tissue Simulating Media


f (MHz) ^c	Relative Permittivity ^f	Conductivity (S/m) ^f	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
450	56.7	0.94	7.82	7.82	7.82	0.12	2.04	± 13.4 %
835	55.2	0.97	6.37	6.37	6.37	0.42	2.33	± 12.0 %
900	55.0	1.05	6.27	6.27	6.27	0.40	2.45	± 12.0 %

^c Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^f At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

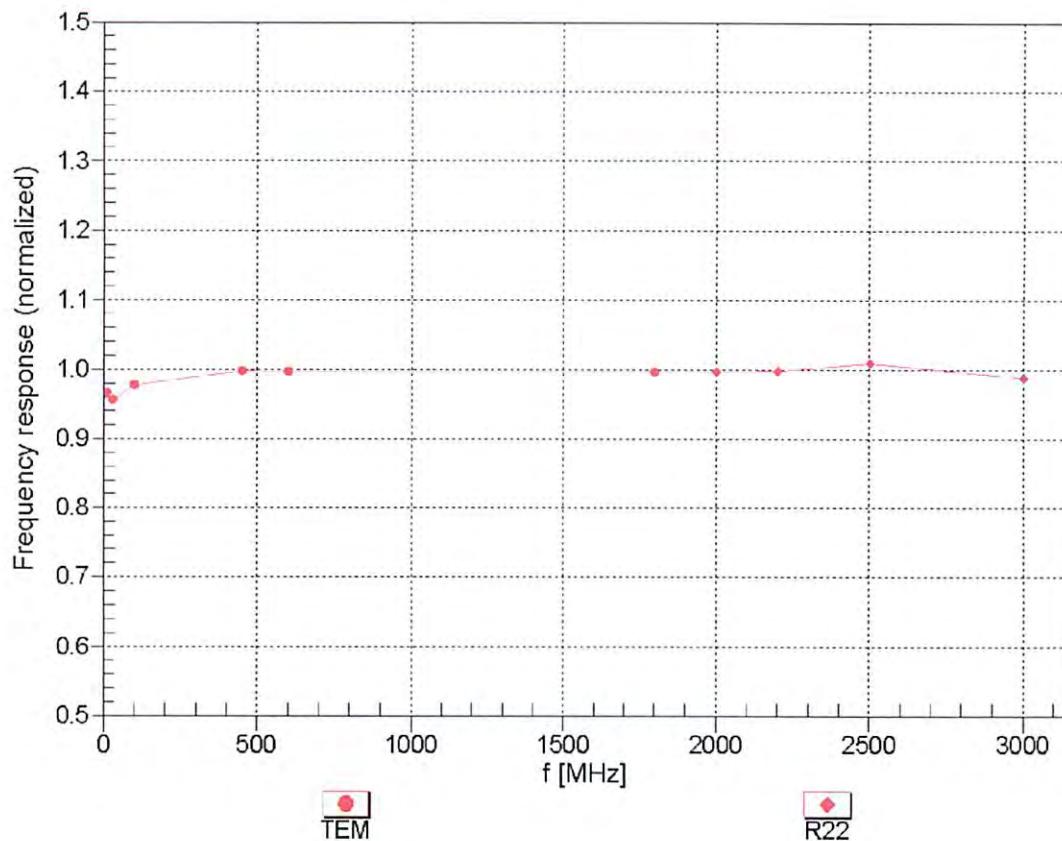



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz,TEM


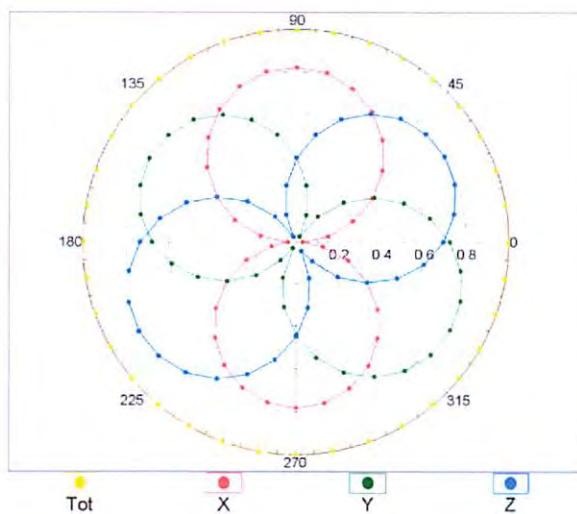


f=1800 MHz,R22

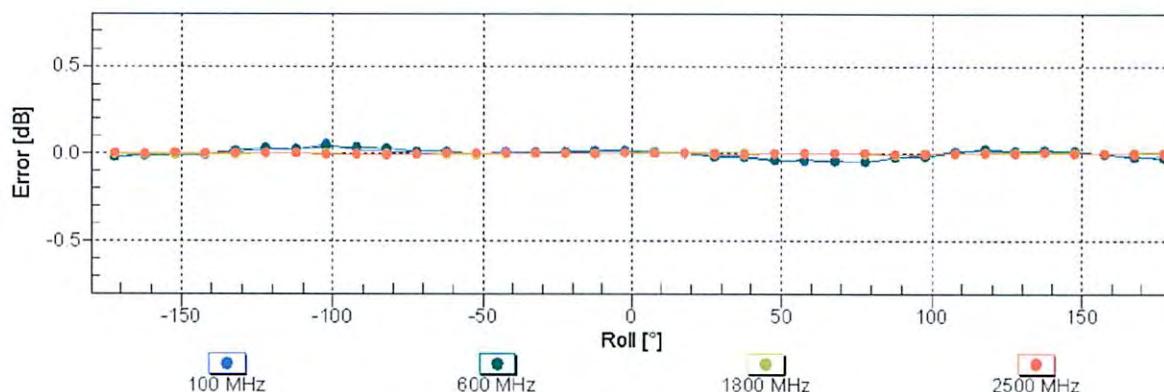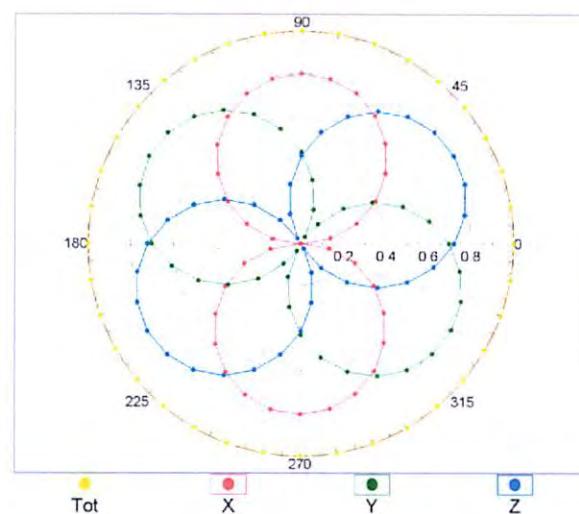Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)


Dynamic Range $f(\text{SAR}_{\text{head}})$

(TEM cell , $f = 900$ MHz)

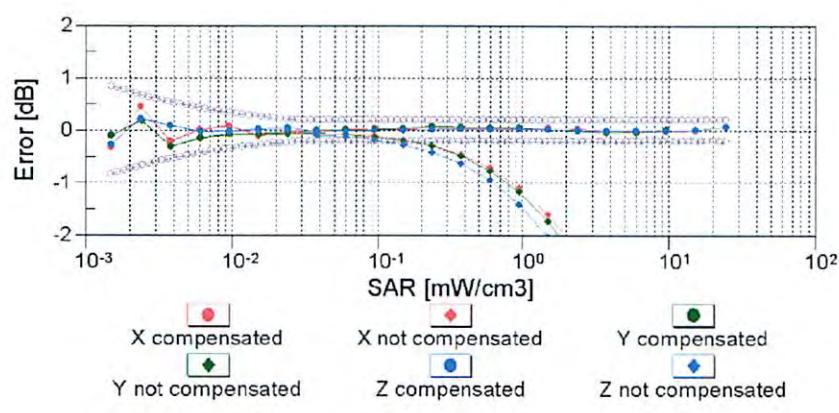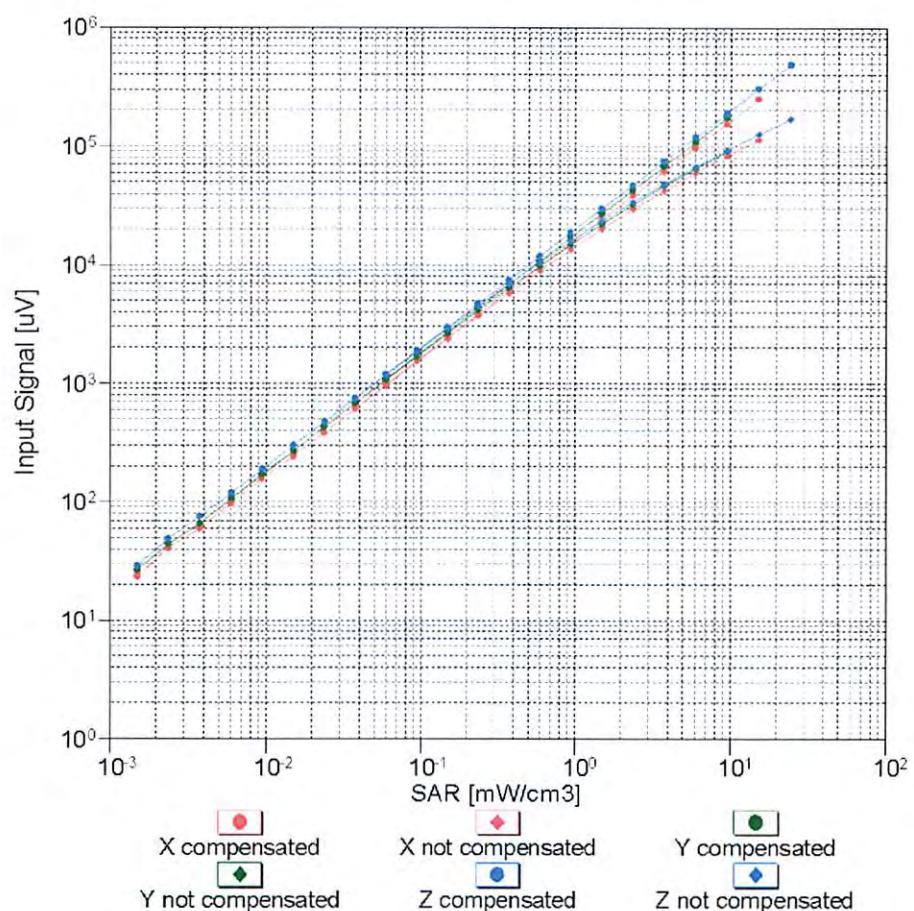


Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

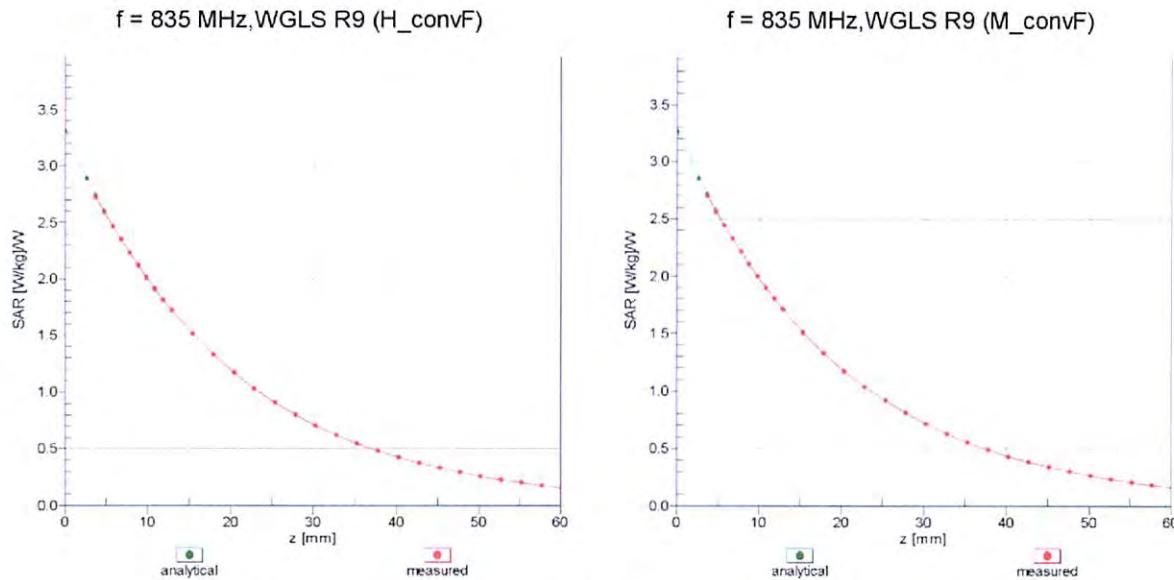

Deviation from Isotropy in Liquid

Error (ϕ, θ), $f = 900 \text{ MHz}$

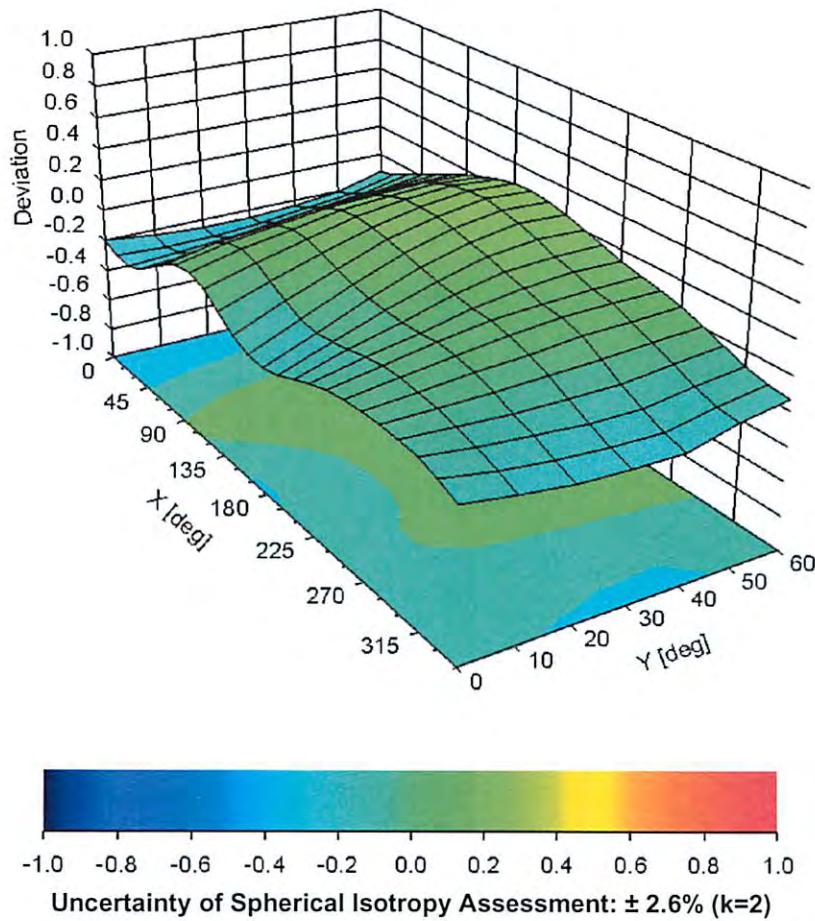

DASY/EASY - Parameters of Probe: ET3DV6 - SN:1590

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	Not applicable
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	enabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	6.8 mm
Probe Tip to Sensor X Calibration Point	2.7 mm
Probe Tip to Sensor Y Calibration Point	2.7 mm
Probe Tip to Sensor Z Calibration Point	2.7 mm
Recommended Measurement Distance from Surface	4 mm

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> Dec. 13, 2011	<u>Test Report Serial No.</u> 113011BBO-T1138-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)
	<u>Test Report Issue Date</u> Jan. 19, 2012	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled



APPENDIX G - BARSKI PLANAR PHANTOM CERTIFICATE OF CONFORMITY

Applicant: Cobra Electronics Corporation	FCC ID: BBO1122A	IC: 906A-1122A	 <small>COBRA ELECTRONICS CORPORATION</small>
DUT Type: Portable UHF GMRS/FRS PTT Radio Transceiver	Model(s): CXT280, CXT235		
2012 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.		Page 50 of 50

2378 Westlake Road
Kelowna, B.C. Canada
V1Z-2V2



Ph. # 250-769-6848
Fax # 250-769-6334
E-mail: barskiind@shaw.ca
Web: www.bcfiberglass.com

FIBERGLASS FABRICATORS

Certificate of Conformity

Item : Flat Planar Phantom Unit # 03-01

Date: June 16, 2003

Manufacturer: Barski Industries (1985 Ltd)

Test	Requirement	Details
Shape	Compliance to geometry according to drawing	Supplied CAD drawing
Material Thickness	Compliant with the requirements	2mm +/- 0.2mm in measurement area
Material Parameters	Dielectric parameters for required frequencies Based on Dow Chemical technical data	100 MHz-5 GHz Relative permittivity < 5 Loss Tangent < 0.05

Conformity

Based on the above information, we certify this product to be compliant to the requirements specified.

Signature: 

Daniel Chailler



Fiberglass Planar Phantom - Top View



Fiberglass Planar Phantom - Front View




Fiberglass Planar Phantom - Back View



Fiberglass Planar Phantom - Bottom View

Dimensions of Fiberglass Planar Phantom

(Manufactured by Barski Industries Ltd. - Unit# 03-01)

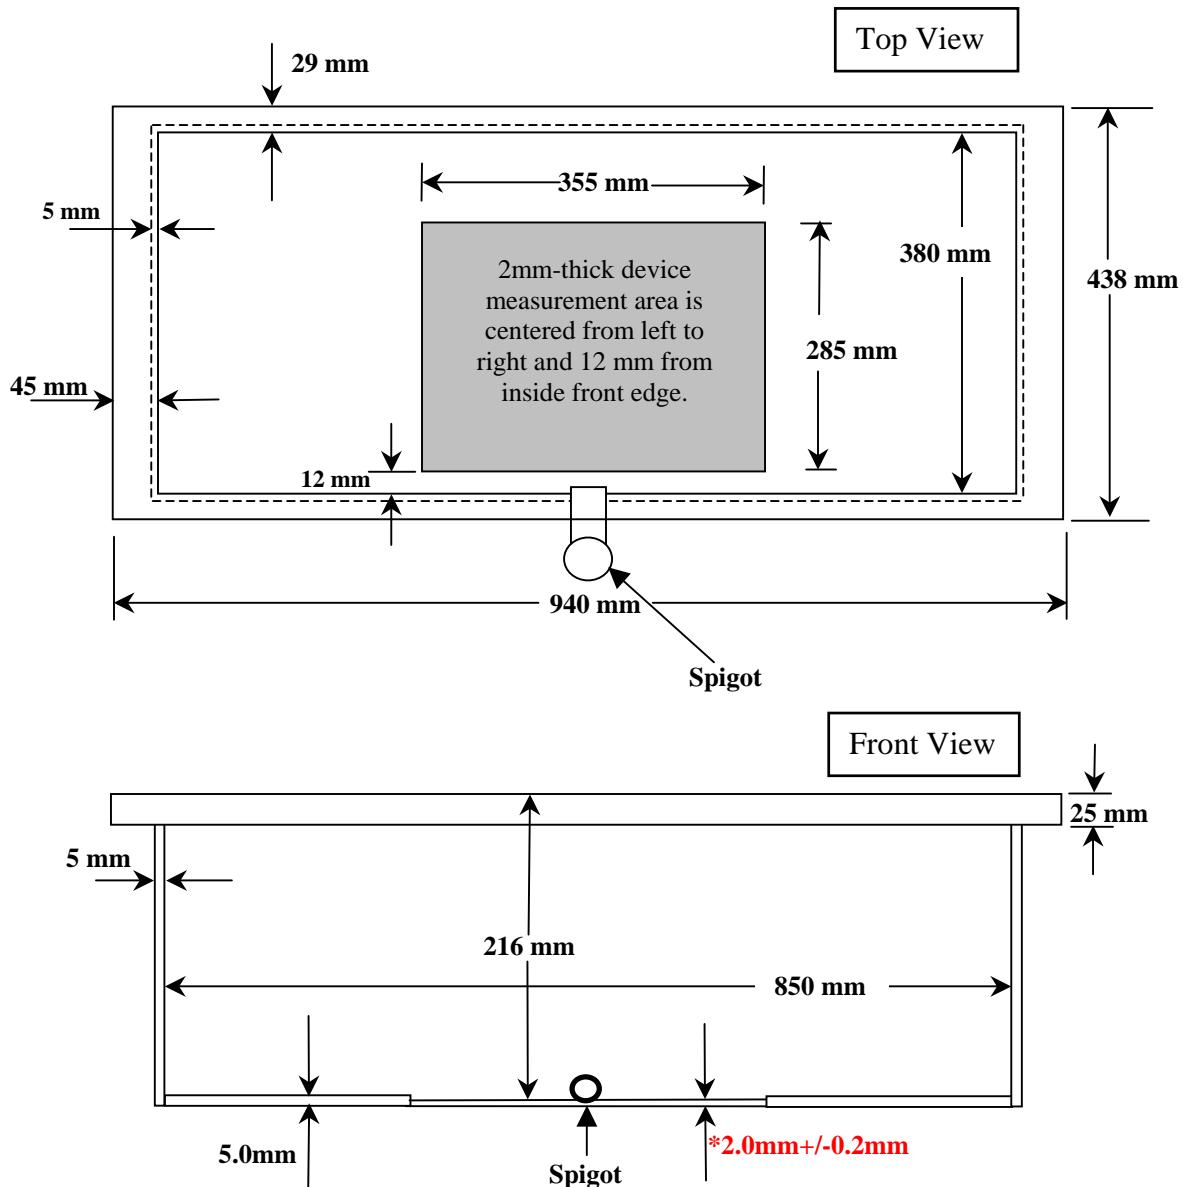

Note: Measurements that aren't repeated for the opposite sides are the same as the side measured.
This drawing is not to scale.