

# **FCC Test Report**

Report No.: AGC01284210601FE10

FCC ID : BBO19MINI

PRODUCT DESIGNATION : CB Radio

**BRAND NAME** : COBRA

**MODEL NAME** : 19MINICB

**APPLICANT**: Cobra Electronics Corporation

**DATE OF ISSUE** : Jul. 09, 2021

**STANDARD(S)** : FCC Part 95 Rules

**REPORT VERSION**: V 1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test resu presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of the test report and in the report apply only to the test report should be addressed to AGC by agc@agc-cert.com.



Page 2 of 36

## REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jul. 09, 2021	Valid	Initial Release

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Restrict/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



## Page 3 of 36

## **TABLE OF CONTENTS**

1.		5
2. I	PRODUCT INFORMATION	6
	2.1 PRODUCT TECHNICAL DESCRIPTION	6
	2.2 TEST FREQUENCY LIST	
	2.3 RELATED SUBMITTAL(S) / GRANT (S)	
	2.4 TEST METHODOLOGY	
	2.5 CALCULATION OF EMISSION INDICATORS	
	2.6 STATEMENT - COMPLIANCE TO §95.977	8
	2.7 SPECIAL ACCESSORIES	8
	2.8 EQUIPMENT MODIFICATIONS	
3	TEST ENVIRONMENT	9
	3.1 ADDRESS OF THE TEST LABORATORY	9
	3.2 TEST FACILITY	9
	3.3 ENVIRONMENTAL CONDITIONS	10
	3.4 MEASUREMENT UNCERTAINTY	10
	3.5 LIST OF EQUIPMENTS USED	
4.8	SYSTEM TEST CONFIGURATION	12
	4.1 EUT CONFIGURATION	12
	4.2 EUT EXERCISE	
	4.3 CONFIGURATION OF TESTED SYSTEM	12
	4.4 EQUIPMENT USED IN TESTED SYSTEM	
	4.5 SUMMARY OF TEST RESULTS	13
5. I	DESCRIPTION OF TEST MODES	14
6.F	FREQUENCY STABILITY	15
	6.1 PROVISIONS APPLICABLE	
	6.2 MEASUREMENT PROCEDURE	15
	6.3 MEASUREMENT SETUP	15
	6.4 MEASUREMENT RESULTS	16
7. I	EMISSION BANDWIDTH	17
	7.1 PROVISIONS APPLICABLE	17
	7.2 MEASUREMENT PROCEDURE	
	7.3 MEASUREMENT SETUP	17
	7.4 MEASUREMENT RESULTS	
8. I	RATIATED SPURIOUS EMISSION	19
	0.4 PROVICIONO APRILICARI E	

8.1 PROVISIONS APPLICABLE.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Declicated Feat and Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 4 of 36

8.2 MEASUREMENT PROCEDURE	
8.3 MEASUREMENT SETUP	
8.4 MEASUREMENT RESULTS	
8.5 EMISSION MASK PLOT	
9. SPURIOUS EMISSION ON ANTENNA PORT	27
9.1 PROVISIONS APPLICABLE	27
9.2 MEASUREMENT METHOD	27
9.3 MEASUREMENT SETUP	27
9.4 MEASUREMENT RESULTS	28
10. MAXIMUMN TRANSMITTER POWER	31
10.1 PROVISIONS APPLICABLE	31
10.2 MEASUREMENT METHOD	
10.3 MEASUREMENT SETUP	
10.4 MEASUREMENT RESULTS	
11.MODULATION CHARACTERISTICS	33
11.1 PROVISIONS APPLICABLE	
11.2 MEASUREMENT METHOD	
11.3 MEASUREMENT SETUP	
11.4 MEASUREMENT RESULTS	34
APPENDIX I: PHOTOGRAPHS OF TEST SETUP&EUT	36

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Specificated Restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 5 of 36

#### 1. GENERAL INFORMATION

Applicant	Cobra Electronics Corporation		
Address	6500 West Cortland Street Chicago, IL 60707-4013 United States		
Manufacturer	Cobra Electronics Corporation		
Address	6500 West Cortland Street Chicago, IL 60707-4013 United States		
Factory	Cobra Electronics Corporation		
Address	6500 West Cortland Street Chicago, IL 60707-4013 United States		
Product Designation	CB Radio		
Brand Name	COBRA		
Test Model	19MINICB		
Deviation from Standard	None		
Date of Receipt	Jun. 10, 2021		
Date of Test	Jun. 10, 2021~Jul. 09, 2021		
Test Result	Pass		

#### WE HEREBY CERTIFY THAT:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI/TIA-382-A-1998. The sample tested as described in this report is in compliance with the FCC Rules Part 95. The test results of this report relate only to the tested sample identified in this report.

Prepared By

Donjon Huang
(Project Engineer)

Reviewed By

Calvin Liu
(Reviewer)

Approved By

Forrest Lei
Authorized Officer

Jul. 09, 2021

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Page 6 of 36

## 2. PRODUCT INFORMATION

## 2.1 PRODUCT TECHNICAL DESCRIPTION

Hardware Version	V1.0
Software Version	V1.02
Power Supply	DC 13.8V
Communication Type	Voice / Tone only
Operation Frequency Range	26.965MHz-27.405MHz
Modulation Type	AM
Channel Separation	10 KHz
Emission Designator	5.909KHz
Number of Channels:	40 Channels
Rated Output Power	4W (It was fixed by the manufacturer, any individual can't arbitrarily change it.)
Maximum Transmitter Power	36.006dBm
Antenna Designation	Detachable
Antenna Type	External antenna
Antenna Gain	0dBi (Typical), 5dBi (Max)
Frequency Tolerance	1.064ppm

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 7 of 36

#### 2.2 TEST FREQUENCY LIST

According to ANSI C63.26 section 5.1.2.1:

Measurements of transmitters shall be performed and, if required, reported for each frequency band in which the EUT can be operated with the device transmitting at the number of frequencies in each band specified in Table 2.

Frequency range Over which EUT operates	Number of Frequencies	Location in frequency range of operation
1 MHz or less 1		Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle, and 1 near bottom

	CBRS	ency Each of Channel	BRS
01			
Channel	Frequency	Channel	Frequency
1 6	26.965 MHz	21	27.215 MHz
2	26.975 MHz	22	27.225 MHz
3	26.985 MHz	23	27.255 MHz
4	27.005 MHz	24	27.235 MHz
5	27.015 MHz	25	27.245 MHz
6	27.025 MHz	26	27.265 MHz
7	27.035 MHz	27	27.275 MHz
8	27.055 MHz	28	27.285 MHz
9	27.065 MHz	29	27.295 MHz
10	27.075 MHz	30	27.305 MHz
11	27.085 MHz	31	27.315 MHz
12	27.105 MHz	32	27.325 MHz
13	27.115 MHz	33	27.335 MHz
14	27.125 MHz	34	27.345 MHz
15	27.135 MHz	35	27.355 MHz
16	27.155 MHz	36	27.365 MHz
17	27.165 MHz	37	27.375 MHz
18	27.175 MHz	38	27.385 MHz
19	27.205 MHz	39	27.395 MHz
20	27.205 MHz	40	27.405 MHz

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 8 of 36

#### 2.3 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for FCC ID: **BBO19MINI**, filing to comply with Part 2, Part 95 of the Federal Communication Commission rules.

#### 2.4 TEST METHODOLOGY

The tests were performed according to following standards:

No.	Identity	Document Title		
1	FCC 47 CFR Part 95	PERSONAL RADIO SERVICES		
2	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations		
3	ANSI C63.26-2015 American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services			
4	ANSI EIA/TIA 382-A-1989	Minimum standards – Citizens band radio service amplitude modulated (AM) transceivers operating in the 27MHz band.		

#### 2.5 CALCULATION OF EMISSION INDICATORS

FCC Rules and Regulations Part 2.202: Necessary Bandwidth and Emission Bandwidth

## For AM Mode (ChannelSpacing: 10kHz)

Emission Designator 8K00A3E

Bn = 2M, M may vary between 4000 and 10000 depending on the quality desired.

Speech and music, M = 4000, Bandwidth: 8000 Hz= 8 kHz

A3E portion of the designator represents an AM voice transmission.

Therefore, the entire designator for 10 kHz channel spacing AM mode is 8K00A3E.

#### 2.6 STATEMENT - COMPLIANCE TO §95.977

§95.977 CBRS tone transmissions.

In addition to the tones permitted under §95.377, CBRS transmitter types may be designed to transmit brief tones to indicate the beginning or end of a transmission.

This device is capable of transmitting a brief (less than one second) audio tone, "Roger Beep", when the PTT button is released on the microphone indicating end of transmission. This function is user selectable and complies with the requirements of §95.377. See User's Manual .

#### 2.7 SPECIAL ACCESSORIES

Not available for this EUT intended for grant.

#### 2.8 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pestud/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 9 of 36

#### 3. TEST ENVIRONMENT

#### 3.1 ADDRESS OF THE TEST LABORATORY

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

#### 3.2 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

#### CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

## A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

#### IC-Registration No.: 24842

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the condicated restrouting portion of Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Page 10 of 36

#### 3.3 ENVIRONMENTAL CONDITIONS

NORMAL CONDITIONS	EXTREME CONDITIONS
15 - 35	-20 - 50
20 % - 75 %	20 % - 75 %
86 - 106	86 - 106
DC13.8V	LV: DC 11.73V/HV:DC 15.87V
	15 - 35 20 % - 75 % 86 - 106

Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.

#### 3.4 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Test Items	Measurement Uncertainty		
Frequency stability	±0.5%		
Transmitter power conducted	±0.8dB		
Transmitter power Radiated	±1.3dB		
Conducted spurious emission 9kHz-40 GHz	±2.7dB		
Conducted Emission	±3.2 dB		
Radiated Emission below 1GHz	±3.9 dB		
Radiated Emission above 1GHz	±4.8 dB		
Occupied Channel Bandwidth	±2 %		
FM deviation	±2 %		
Audio level	±0.98dB		
Low Pass Filter Response	±0.65dB		
Modulation Limiting	0.42 %		
Transient Frequency Behavior	6.8 %		

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Residual Algorithms and the report is not permitted without the written authorization of AGC where the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 11 of 36

#### 3.5 LIST OF EQUIPMENTS USED

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Apr. 14, 2021	Apr. 13, 2022
EXA Signal Analyzer	Aglient	N9020A	W1312-60196	Aug. 21, 2020	Aug. 20, 2021
EXA Signal Analyzer	Aglient	N9020A	MY52090123	Sep. 03, 2020	Sep. 02, 2021
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep.16, 2019	Sep.15, 2021
preamplifier	ChengYi	EMC184045SE	980508	Sep. 23, 2019	Sep. 22, 202
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Apr. 23, 2021	Apr. 22, 2023
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun. 09, 2020	Jun. 08, 2021
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun. 07, 2021	Jun. 06, 2022
HORN ANTENNA	EM	EM-AH-10180	1	Feb. 26, 2021	Feb. 25, 2022
SIGNAL GENERATOR	AGILENT	E4421B	MY43351603	May 11, 2021	May 10, 2022
SIGNAL GENERATOR	R&S	SMT03	A0304261	Jun. 09, 2020	Jun. 08, 2021
SIGNAL GENERATOR	R&S	SMT03	A0304261	Jun. 07, 2021	Jun. 06, 2022
ANTENNA	SCHWARZBECK	VULB9168	VULB9168-494	Jan. 08, 2021	Jan. 07, 2023
ANTENNA	SCHWARZBECK	VULB9168	D69250	Sep. 20, 2019	Sep. 19, 202
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	May 22, 2021	May 20, 2022
Modulation Domain Analyzer	HP	53310A	3121A02467	Aug. 26, 2020	Aug. 25, 202
Small environmental tester	ESPEC	SH-242	-	Sep. 03, 2020	Sep. 02, 2022
RF Communication Test Set	CHP	8920B	US35010161	Sep. 03, 2020	Sep. 02, 2027
Attenuator	Weinachel Corp	58-30-33	ML030	Oct. 26, 2020	Oct. 25, 2021
RF Cable	R&S	1#	GC	Each time	N/A
RF Cable	R&S	2#	®	Each time	N/A
Fliter-UHF	Microwave	N25155M2	498705	May 09, 2021	May 08, 2022

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 12 of 36

## **4.SYSTEM TEST CONFIGURATION**

#### **4.1 EUT CONFIGURATION**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### **4.2 EUT EXERCISE**

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

#### 4.3 CONFIGURATION OF TESTED SYSTEM

Fig. 2-1 Configuration of Tested System

EUT

Table 2-1 Equipment Used in Tested System

#### **4.4 EQUIPMENT USED IN TESTED SYSTEM**

The Following Peripheral Devices And Interface Cables Were Connected During The Measurement:

- ☐ Test Accessories Come From The Laboratory
- Test Accessories Come From The Manufacturer

Item	Equipment	Model No.	Identifier	Note
1	CB Radio	19MINICB	FCC ID: BBO19MINI	EUT
2	Hand microphone	BAT-R1		Accessories

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the condicated restrouting portion of Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Report No.: AGC01284210601FE10 Page 13 of 36

#### 4.5 SUMMARY OF TEST RESULTS

Item	FCC Rules	Description of Test	Result
1	§ 95.967& 2.1046(a)	Maximum Transmitter Power	Pass
2	§95.975& 2.1047(a) (b)	Modulation Limit	Pass
3	§95.975& 2.1047(a)	Audio Frequency Response	Pass
4	§95.973& 2.1049	Emission Bandwidth	Pass
5	§95.979& 2.1049	Emission Mask	Pass
6	§95.965& 2.1055(a) (1)	Frequency Stability	Pass
7	§95.979& 2.1051	Spurious Emission on Antenna Port	Pass
8	§95.979& 2.1053	Ratiated Spurious Emission	Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Pest Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issue of Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com. g/Inspection he test results



Page 14 of 36

#### 5. DESCRIPTION OF TEST MODES

The EUT (CB Radio) has been tested under normal operating condition. (CBRS TX) are chosen for testing at each channel separation.

NO.	TEST MODE DESCRIPTION	CHANNEL SEPARATION
1 0	CBRS TX CHANNEL 1	10.0 kHz
2	CBRS TX CHANNEL 19	10.0 kHz
3	CBRS TX CHANNEL 40	10.0 kHz

#### Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- Manufacturers use computer PC programming software to switch and operate frequency points, refer to the instructions for details

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written appropriation of AGC the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.



Page 15 of 36

#### 6.FREQUENCY STABILITY

#### **6.1 PROVISIONS APPLICABLE**

Each CBRS transmitter type must be designed such that the transmit carrier frequency (or in the case of SSB transmissions, the reference frequency) remains within 50 parts-per- million of the channel center frequencies specified in §95.963 under all normal operating conditions.

#### **6.2 MEASUREMENT PROCEDURE**


#### 6.2.1 Frequency stability versus environmental temperature

- 1. Setup the configuration per figure 1 for frequencies measurement inside an environment chamber, Install new battery in the EUT.
- Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1kHz and Video Resolution Bandwidth to 1kHz and Frequency Span to 50kHz.Record this frequency as reference frequency.
- 3. Set the temperature of chamber to 50°C. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
- 4. Repeat step 2 with a 10℃ decreased per stage until the lowest temperature -30℃ is measured, record all measured frequencies on each temperature step.

#### 6.2.2 Frequency stability versus input voltage

- Setup the configuration per figure 1 for frequencies measured at temperature if it is within 15℃ to 25℃.
   Otherwise, an environment chamber set for a temperature of 20℃ shall be used. The EUT shall be powered by DC 13.8V.
- 2. Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1 kHz and Video Resolution Bandwidth to 1kHz. Record this frequency as reference frequency.
- 3. Supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.

#### **6.3 MEASUREMENT SETUP**

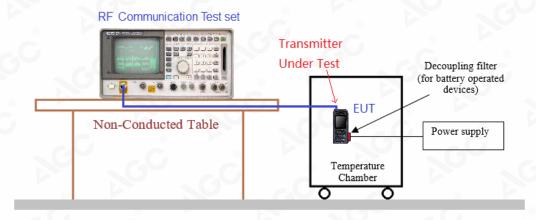

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written exporization of AGC he test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.



Report No.: AGC01284210601FE10 Page 16 of 36

## **6.4 MEASUREMENT RESULTS**

Test conditions		Frequency error (ppm)				
Voltage	Temp	Test Frequency (MHz)			Limit (ppm)	Result
(V)	(℃)	26.965	27.185	27.405	(PPIII)	
13.80	-30	0.832	0.653	0.676	10°	
	-20	0.604	0.611	0.965		
	-10	1.048	0.945	0.965	8	
	0	0.917	0.721	0.780	7,0	
	10	0.893	0.659	0.561		
	20	0.897	1.026	0.691	50	Pass
	30	0.576	0.557	0.524		8
	40	0.851	0.636	0.882		
	50	0.797	0.617	0.516		
15.87	20	0.987	0.589	1.021	CC	
11.73	20	0.525	0.803	1.064		-0

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Pest Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issue of Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com. g/Inspection the test results he test report.



Page 17 of 36

#### 7. EMISSION BANDWIDTH

#### 7.1 PROVISIONS APPLICABLE

FCC Part 95.973, FCC Part 2.1049

Each CBRS transmitter type must be designed such that the occupied bandwidth does not exceed the authorized bandwidth for the emission type under test.

- (a) AM. The authorized bandwidth for emission type A3E is 8 kHz.
- (b)SSB.The authorized bandwidth for emission types J3E, R3E, and H3E is 4 kHz.

#### 7.2 MEASUREMENT PROCEDURE

- 1. Connect the equipment as illustrated
- The EUT was modulated by 2.5kHz sine wave audio signal; the level of the audio signal employed is 16dB greater than that necessary to produce 50% of rated system deviation.
  - Rated system deviation is 2.5 kHz for 12.5kHz channel spacing).
- 3. Spectrum set as follow:
  - Centre frequency = the nominal EUT channel center frequency,
  - The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (typically a span of 1.5 × OBW is sufficient)
  - RBW = 1% to 5% of the anticipated OBW, VBW  $\geq$  3  $\times$  RBW, Sweep = auto, Detector function = peak, Trace = max hold
- 4. Set 99% Occupied Bandwidth and 26dB Bandwidth
- 5. Measure and record the results in the test report.

#### 7.3 MEASUREMENT SETUP



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated resting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.




Page 18 of 36

## 7.4 MEASUREMENT RESULTS

Emission Bandwidth Measurement Result-CBRS				
Operating Frequency	10 kHz Channel Separation			
Operating Frequency	Occupied Bandwidth	Emission Bandwidth	Limits	Result
26.965 MHz	5.572 kHz	5.900 kHz	8.0 kHz	Pass
27.205 MHz	5.576 kHz	5.909 kHz	8.0 kHz	Pass
27.405 MHz	5.569 kHz	5.897 kHz	8.0 kHz	Pass

#### Test plot as follows:

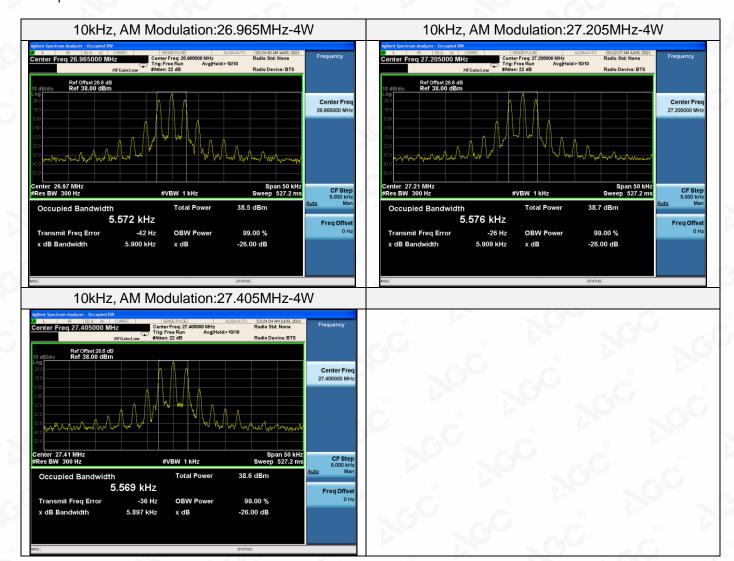

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the sedicated restroy/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written exchorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 19 of 36

#### 8. RATIATED SPURIOUS EMISSION

#### 8.1 PROVISIONS APPLICABLE

FCC Part 95.979(a), FCC Part 2.1049

Each CBRS transmitter type must be designed to comply with the applicable unwanted emissions limits in this section. The power of unwanted emissions must be attenuated below the transmitter output power in Watts (P) as specified in the applicable paragraphs listed in the following table:

Emission type	Paragraph
A3E	(1), (3), (5), (6)
H3E, J3E, R3E	(2), (4), (5), (6)

- (1) 25 dB (decibels) in the frequency band 4 kHz to 8 kHz removed from the channel center frequency;
- (2) 25 dB in the frequency band 2 kHz to 6 kHz removed from the channel center frequency;
- (3) 35 dB in the frequency band 8 kHz to 20 kHz removed from the channel center frequency;
- (4) 35 dB in the frequency band 6 kHz to 10 kHz removed from the channel center frequency;
- (5) 53 + 10 log (P) dB in any frequency band removed from the channel center frequency by more than 250% of the authorized bandwidth.
- (6) 60 dB in any frequency band centered on a harmonic (i.e., an integer multiple of two or more times) of the carrier frequency.

#### **8.2 MEASUREMENT PROCEDURE**

- 1. EUT was placed on a 0.8 or 1.5meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made. The radiated emission measurements of all transmit frequencies in all channels were measured with peak detector.
- 2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- 3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
- 4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

- 5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (PcI) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test
- 6. The measurement results are obtained as described below: Power(EIRP)=PMea- PAg Pcl Ga The measurement results are amend as described below:Power(EIRP)=PMea- Pcl Ga
- 7. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
- 8. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.
- 9. Test the EUT in the lowest channel, the middle channel the Highest channel

#### **8.3 MEASUREMENT SETUP**

Receiver / Spectrum Analyzer

Antenna

Measurement distance = 3 m

Multi device Controller


Fre-Amplifier

Ground Reference Plane

Ground Reference Plane

Ground Reference Plane

Radiated Emissions Below 30MHz-1GHz Test Setup

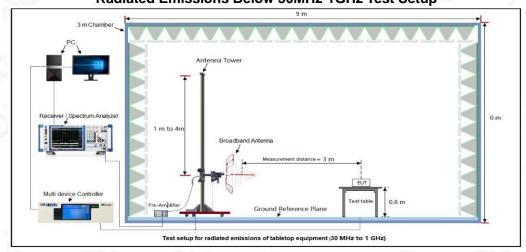

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.