




	<u>Date(s) of Evaluation</u> February 16, 2010	<u>Test Report Serial No.</u> 0215BBO-T1008-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> February 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

SAR TEST REPORT (FCC/IC)				
RF EXPOSURE EVALUATION		SPECIFIC ABSORPTION RATE		
APPLICANT / MANUFACTURER	COBRA ELECTRONICS CORPORATION			
DEVICE UNDER TEST (DUT)	PORTABLE GMRS/FRS PTT RADIO TRANSCEIVER			
DUT FREQUENCY RANGE(S)	462.5500 - 462.7250 MHz		GMRS Channels 15-22	
	462.5625 - 462.7125 MHz		GMRS/FRS Channels 1-7	
	467.5625 - 467.7125 MHz		FRS Channels 8-14	
DUT MODEL(S)	CXT425			
DEVICE IDENTIFIER(S)	FCC ID:	BBO2104B	IC:	906B-2104B
APPLICATION TYPE	FCC/IC Certification			
STANDARD(S) APPLIED	FCC 47 CFR §2.1093			
	Health Canada Safety Code 6			
PROCEDURE(S) APPLIED	FCC OET Bulletin 65, Supp. C (01-01)			
	FCC KDB 447498 D01v04			
	IC RSS-102 Issue 3			
	IEEE 1528-2003			
	IEC 62209-1:2005			
RF EXPOSURE CATEGORY	General Population / Uncontrolled			
RF EXPOSURE EVALUATION(S)	Face-held		Body-worn	
DATE(S) OF EVALUATION(S)	February 16, 2010			
TEST REPORT SERIAL NO.	021510BBO-T1008-S95U			
TEST REPORT REVISION NO.	Revision 1.0	Initial Release	February 19, 2010	
TEST REPORT SIGNATORIES	Testing Performed By		Test Report Prepared By	
	Sean Johnston - Celltech Labs		Jon Hughes - Celltech Labs	
TEST LAB AND LOCATION	Celltech Compliance Testing and Engineering Laboratory			
	21-364 Lougheed Road, Kelowna, B.C. V1X 7R8 Canada			
TEST LAB CONTACT INFO.	Tel.: 250-765-7650		Fax: 250-765-7645	
	info@celltechlabs.com		www.celltechlabs.com	
TEST LAB ACCREDITATION(S)	 Test Lab Certificate No. 2470.01			


Applicant:	Cobra Electronics Corporation	FCC ID:	BBO2104B	IC:	906B-2104B	
Model(s):	CXT425	DUT:	Portable GMRS/FRS PTT Radio Transceiver	462.5500 - 467.7125 MHz		
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 1 of 36

	<u>Date(s) of Evaluation</u> February 16, 2010	<u>Test Report Serial No.</u> 0215BBO-T1008-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

DECLARATION OF COMPLIANCE SAR RF EXPOSURE EVALUATION

Test Lab Information	Name	CELLTECH LABS INC.			
	Address	21-364 Lougheed Road, Kelowna, British Columbia V1X 7R8 Canada			
Applicant Information	Name	COBRA ELECTRONICS CORPORATION			
	Address	6500 West Cortland Street, Chicago, IL 60707 United States			
Standard(s) Applied	FCC	47 CFR §2.1093			
	IC	Health Canada Safety Code 6			
Procedure(s) Applied	FCC	OET Bulletin 65, Supplement C (Edition 01-01)	KDB 447498 D01v04		
	IC	RSS-102 Issue 3			
	IEEE	1528-2003			
	IEC	62209-1:2005; 62209-2 (Draft)			
Device Identifier(s)	FCC ID:	BBO2104B			
	IC:	906B-2104B			
	Model(s)	CXT425			
	Serial No.	#18 (Identical Prototype)			
Application Type	FCC/IC	TCB/CB Certification			
Device Description	Portable FM UHF GMRS/FRS Push-To-Talk (PTT) Radio Transceiver				
Transmit Frequency Range(s)	462.5500 - 462.7250 MHz (GMRS Channels 15-22)				
	462.5625 - 462.7125 MHz (GMRS/FRS Channels 1-7)				
	467.5625 - 467.7125 MHz (FRS Channels 8-14)				
RF Output Power Tested	1.7 Watts	32.3 dBm	Conducted	462.7250 MHz	GMRS Ch. 22
Battery Type(s) Tested	Ni-MH Battery	4x AAA	1.2 V	600 mAh	
	Alkaline Battery	4x AAA	1.5 V	Energizer Industrial	
Antenna Type(s) Tested	External Non-detachable				
Body-worn Accessories Tested	Plastic Belt-Clip (supplied with DUT)				
Audio Accessories Tested	Ear-bud with Lapel-Microphone & PTT (P/N: GA-EBM2)				
Max. SAR Level(s) Evaluated	Face-held	0.560 W/kg	1g	50% duty cycle	General Population / Uncontrolled
	Body-worn	0.635 W/kg	1g	50% duty cycle	General Population / Uncontrolled
FCC/IC Spatial Peak SAR Limit	Head/Body	1.6 W/kg	1g	50% duty cycle	General Population / Uncontrolled
<p>Celltech Labs Inc. declares under its sole responsibility that this wireless portable device has demonstrated compliance with the Specific Absorption Rate (SAR) RF exposure requirements specified in FCC 47 CFR §2.1093 and Health Canada's Safety Code 6 for the General Population / Uncontrolled Exposure environment. The device was tested in accordance with the measurement procedures described in FCC OET Bulletin 65, Supplement C (Edition 01-01), Industry Canada RSS-102 Issue 3, IEEE Standard 1528-2003, IEC International Standard 62209-1:2005 and IEC International Draft Standard 62209-2 (106-62209-2-CDV_090323). All measurements were performed in accordance with the SAR system manufacturer recommendations.</p>					
<p>I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.</p>					
<p>The results and statements contained in this report pertain only to the device(s) evaluated. This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc.</p>					
Test Report Approved By			Sean Johnston	Celltech Labs Inc.	



Applicant:	Cobra Electronics Corporation	FCC ID:	BBO2104B	IC:	906B-2104B	
Model(s):	CXT425	DUT:	Portable GMRS/FRS PTT Radio Transceiver	462.5500 - 467.7125 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 2 of 36







	<u>Date(s) of Evaluation</u> February 16, 2010	<u>Test Report Serial No.</u> 0215BBO-T1008-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 
	<u>Test Report Issue Date</u> February 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

TABLE OF CONTENTS

1.0 INTRODUCTION	4
2.0 SAR MEASUREMENT SYSTEM	4
3.0 RF CONDUCTED OUTPUT POWER MEASUREMENTS	4
4.0 SAR MEASUREMENT SUMMARY	5
5.0 DETAILS OF SAR EVALUATION	6
6.0 EVALUATION PROCEDURES	6
7.0 SYSTEM PERFORMANCE CHECK	7
8.0 SAR PROBE CALIBRATION & MEASUREMENT FREQUENCIES	8
9.0 SIMULATED EQUIVALENT TISSUES	8
10.0 SAR LIMITS	8
11.0 ROBOT SYSTEM SPECIFICATIONS	9
12.0 PROBE SPECIFICATION (ET3DV6)	10
13.0 PLANAR PHANTOM	10
14.0 DEVICE HOLDER	10
15.0 TEST EQUIPMENT LIST	11
16.0 MEASUREMENT UNCERTAINTIES	12
17.0 REFERENCES	13
APPENDIX A - SAR MEASUREMENT DATA	14
APPENDIX B - SYSTEM PERFORMANCE CHECK DATA	21
APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS	24
APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS	27
APPENDIX E - DIPOLE CALIBRATION	34
APPENDIX F - PROBE CALIBRATION	35
APPENDIX G - PLANAR PHANTOM CERTIFICATE OF CONFORMITY	36

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO2104B	IC:	906B-2104B	
Model(s):	CXT425	DUT:	Portable GMRS/FRS PTT Radio Transceiver	462.5500 - 467.7125 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 3 of 36

	<u>Date(s) of Evaluation</u> February 16, 2010	<u>Test Report Serial No.</u> 0215BBO-T1008-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

1.0 INTRODUCTION


This measurement report demonstrates that the Cobra Electronics Corporation Model: CXT425 Portable FM UHF GMRS/FRS PTT Radio Transceiver complies with the SAR (Specific Absorption Rate) RF exposure requirements specified in FCC 47 CFR §2.1093 (see reference [1]) and Health Canada's Safety Code 6 (see reference [2]) for the General Population / Uncontrolled Exposure environment. The measurement procedures described in FCC OET Bulletin 65, Supplement C 01-01 (see reference [2]), IEEE Standard 1528-2003 (see reference [3]), IEC Standard 62209-1:2005 (see reference [4]) and IEC Draft Standard 62209-2 (see reference [5]) were employed. A description of the device, operating configuration, detailed summary of the test results, methodology and procedures used in the evaluation, equipment used and the various provisions of the rules are included within this test report.



2.0 SAR MEASUREMENT SYSTEM

Celltech Labs Inc. SAR measurement facility utilizes the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 measurement system is comprised of the measurement server, robot controller, computer, near-field probe, probe alignment sensor, specific anthropomorphic mannequin (SAM) phantom, and various planar phantoms for Body and/or body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot utilizes a controller with built in VME-bus computer.

3.0 RF CONDUCTED OUTPUT POWER MEASUREMENTS

MEASURED RF CONDUCTED OUTPUT POWER						
Mode	Frequency	Channel	Modulation	Power Setting	dBm	Watts
GMRS	462.7250 MHz	22	Unmodulated (Continuous Wave)	High	32.3	1.7
Notes						
2. The RF conducted output power level of the DUT was measured using a Gigatronics 8652A Universal Power Meter (see page 33 for DUT conducted power measurement configuration).						

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO2104B	IC:	906B-2104B	
Model(s):	CXT425	DUT:	Portable GMRS/FRS PTT Radio Transceiver	462.5500 - 467.7125 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 4 of 36

	<u>Date(s) of Evaluation</u> February 16, 2010	<u>Test Report Serial No.</u> 0215BBO-T1008-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> February 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

4.0 SAR MEASUREMENT SUMMARY



SAR EVALUATION RESULTS

Test Config.	Freq.	Channel		Batt. Type	Accessories		DUT Spacing to Planar Phantom		Cond. Power Before Test	Measured SAR 1g (W/kg)		SAR Drift During Test	Scaled SAR with droop 1g (W/kg)	
										PTT Duty Cycle			PTT Duty Cycle	
	MHz	Body	Audio	DUT	Antenna	Watts	100%	50%	dB	100%	50%			
FACE	462.725	22	GMRS	Ni-MH	n/a	n/a	2.5 cm	3.5 cm	1.7	0.883	0.442	-0.746	1.05	0.525
	462.725	22	GMRS	Alkaline	n/a	n/a	2.5 cm	3.5 cm	1.7	0.887	0.444	-0.993	1.12	0.560
BODY	462.725	22	GMRS	Ni-MH	Belt-Clip	Ear-bud	0.8 cm	1.5 cm	1.7	1.05	0.525	-0.432	1.16	0.580
	462.725	22	GMRS	Alkaline	Belt-Clip	Ear-bud	0.8 cm	1.5 cm	1.7	1.05	0.525	-0.813	1.27	0.635

SAR LIMIT(S)				HEAD & BODY				SPATIAL PEAK				RF EXPOSURE CATEGORY							
FCC 47 CFR 2.1093				Health Canada Safety Code 6				1.6 W/kg				averaged over 1 gram				General Population / Uncontrolled			
Test Date(s)		February 16, 2010				February 16, 2010				Atmosph. Pressure		H	101.1	B	101.1	kPa			
Measured Fluid		450 MHz Head		460 MHz Eval.		450 MHz Body		460 MHz Eval.		Relative Humidity		H	35	B	35	%			
Dielectric Constant ϵ_r		IEEE Target		Meas.	Dev.	IEEE Target		Meas.	Dev.	Ambient Temp.		H	22.9	B	22.1	°C			
		43.5	± 5%	44.7	+2.8%	56.7	± 5%	56.0	-1.2%	Fluid Temp.		H	21.8	B	21.2	°C			
Conductivity σ (mho/m)		IEEE Target		Meas.	Dev.	IEEE Target		Meas.	Dev.	Fluid Depth		H	≥ 15	B	≥ 15	cm			
		0.87	± 5%	0.85	-2.3%	0.94	± 5%	0.91	-3.2%	ρ (Kg/m ³)		1000							

- Notes**
- Detailed measurement plots showing the maximum SAR location of the DUT are reported in Appendix A.
 - The transmission band of the DUT is less than 10 MHz; therefore single channel data only is required to be reported (per FCC OET Bulletin 65, Supplement C, Edition 01-01 - see reference [3]).
 - The power droop measured by the DASY4 system for the duration of the SAR evaluation was added to the measured SAR level to report the scaled SAR result as shown in the above test data table. A SAR-versus-Time power droop evaluation was also performed and the evaluation plot is shown in Appendix A (SAR Test Plots).
 - The DUT was tested in unmodulated continuous transmit operation (Continuous Wave mode at 100% duty cycle) with the PTT transmit key constantly depressed.

5.	SAR Evaluation Power Thresholds for PTT Devices, $f \leq 0.5$ GHz per FCC KDB 447498 D01v04 Section 5)b)i)						RF Conducted Output Power Levels			
							GMRS Mode		FRS Mode	
	Exposure Conditions		P mW (General Population)		P mW (Occupational)		PTT Duty Cycle		PTT Duty Cycle	
							100%	50%	100%	50%
Held to face, $d \geq 2.5$ cm		250		1250		1.7 W	0.85 W	0.5 W	0.25 W	
Body-worn, $d \geq 1.5$ cm		200		1000						
Body-worn, $d < 1.5$ cm		150		750		1.7 W	0.85 W	0.5 W	0.25 W	
<ol style="list-style-type: none"> The time-averaged output power, corresponding to the required PTT duty factor, is compared with these thresholds. The closest distance between the user and the device or its antenna is used to determine the power thresholds. 						<ol style="list-style-type: none"> The GMRS conducted output power level exceeds the FCC threshold for SAR evaluation. The FRS conducted output power level is below the FCC threshold for SAR evaluation. 				

	<u>Date(s) of Evaluation</u> February 16, 2010	<u>Test Report Serial No.</u> 0215BBO-T1008-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	


5.0 DETAILS OF SAR EVALUATION



The Cobra Electronics Corporation Model: CXT425 Portable FM UHF GMRS/FRS PTT Radio Transceiver was compliant for localized Specific Absorption Rate (General Population / Uncontrolled Exposure) based on the test provisions and conditions described below. The detailed test setup photographs are shown in Appendix D.

- The DUT was evaluated for SAR in a face-held configuration with the front of the radio placed parallel to the outer surface of the planar phantom. A 2.5 cm spacing was maintained between the front of the DUT and the outer surface of the planar phantom.
- The DUT was evaluated for SAR in a body-worn configuration with the back of the radio facing the outer surface of the planar phantom. The DUT antenna was placed parallel to the planar phantom. The attached plastic belt-clip accessory was touching the planar phantom and provided 0.8 cm spacing from the back of the DUT to the outer surface of the planar phantom. The DUT was evaluated for body-worn SAR the Cobra supplied ear-bud lapel-microphone audio accessory connected to the external audio port.
- The conducted output power level of the DUT referenced in this report was measured by Celltech Labs prior to the SAR evaluations using a Gigatronics 8652A Universal Power Meter in accordance with the requirements of FCC 47 CFR §2.1046 and IC RSS-Gen.
- The Ni-MH batteries were fully charged prior to the Ni-MH battery SAR evaluations. New alkaline batteries were used for the alkaline battery SAR evaluations.
- The DUT was tested at maximum power preset by the manufacturer in unmodulated continuous transmit operation (Continuous Wave mode at 100% duty cycle) with the PTT transmit key constantly depressed. For a push-to-talk device the 50% duty cycle compensation reported assumes a transmit/receive cycle of equal time base.
- The fluid temperature was measured prior to and after the SAR evaluations to ensure the temperature remained within +/-2°C of the fluid temperature reported during the dielectric parameter measurements.
- The dielectric parameters of the simulated tissue mixtures were measured prior to the SAR evaluations using a Dielectric Probe Kit and a Network Analyzer (see Appendix C).

6.0 EVALUATION PROCEDURES

- The evaluation was performed in the applicable area of the phantom depending on the type of device being tested. For devices held to the ear during normal operation, both the left and right ear positions were evaluated using the SAM phantom.
 - For body-worn and face-held devices a planar phantom was used.
- The SAR was determined by a pre-defined procedure within the DASY4 software. Upon completion of a reference and optical surface check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 15mm x 15mm.
An area scan was determined as follows:
- Based on the defined area scan grid, a more detailed grid is created to increase the points by a factor of 10. The interpolation function then evaluates all field values between corresponding measurement points.
- A linear search is applied to find all the candidate maxima. Subsequently, all maxima are removed that are >2 dB from the global maximum. The remaining maxima are then used to position the cube scans.
A 1g and 10g spatial peak SAR was determined as follows:
- Extrapolation is used to find the points between the dipole center of the probe and the surface of the phantom. This data cannot be measured, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.4 mm (see probe calibration document in Appendix E). The extrapolation was based on trivariate quadratics computed from the previously calculated 3D interpolated points nearest the phantom surface.
- Interpolated data is used to calculate the average SAR over 1g and 10g cubes by spatially discretizing the entire measured cube. The volume used to determine the averaged SAR is a 1mm grid (42875 interpolated points).
- A zoom scan volume of 32 mm x 32 mm x 30 mm (5 x 5 x 7 points) centered at the peak SAR location determined from the area scan is used for all zoom scans for devices with a transmit frequency < 800 MHz. Zoom scans for frequencies ≥ 800 MHz are determined with a scan volume of 30 mm x 30 mm x 30 mm (7 x 7 x 7) to ensure complete capture of the peak spatial-average SAR.


Applicant:	Cobra Electronics Corporation	FCC ID:	BBO2104B	IC:	906B-2104B	
Model(s):	CXT425	DUT:	Portable GMRS/FRS PTT Radio Transceiver	462.5500 - 467.7125 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 6 of 36

	<u>Date(s) of Evaluation</u> February 16, 2010	<u>Test Report Serial No.</u> 0215BBO-T1008-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

7.0 SYSTEM PERFORMANCE CHECK


Prior to the SAR evaluation a daily system check was performed with a Fiberglass planar phantom and SPEAG 450 MHz dipole (see Appendix B for system performance check test plots) in accordance with the procedures described in IEEE Standard 1528-2003 (see reference [3]). The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer (see Appendix C for measured fluid dielectric parameters). A forward power of 398 mW was applied to the dipole and the system was verified to a tolerance of $\pm 10\%$ from the SAR system manufacturer's dipole calibration target SAR value (see Appendix E for system manufacturer's dipole calibration procedures).

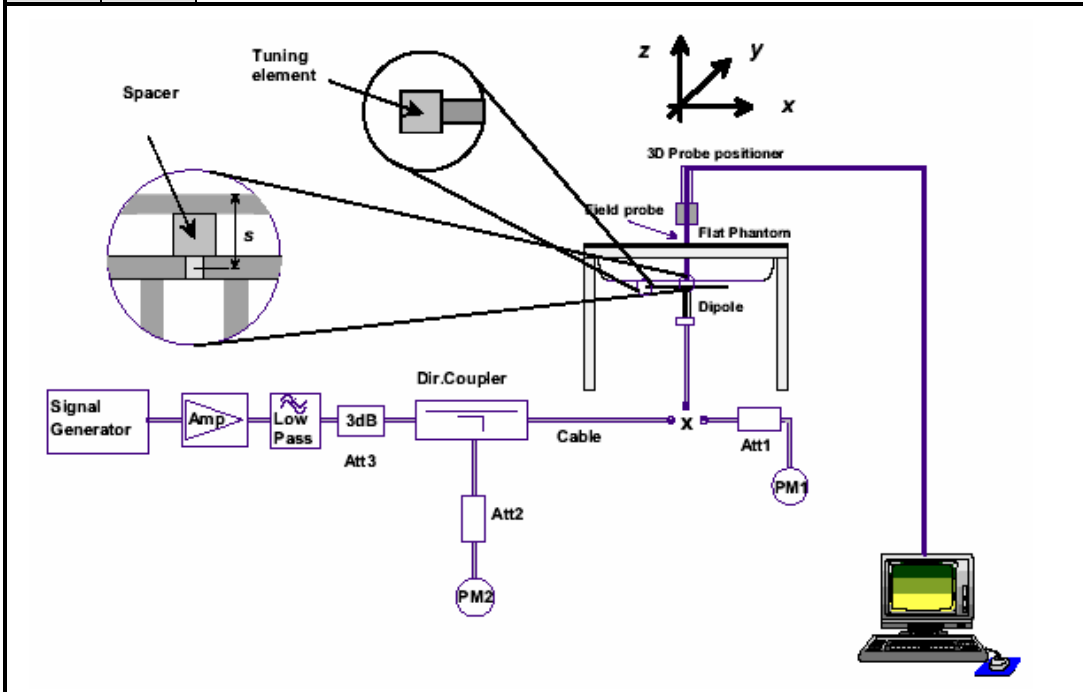

SYSTEM PERFORMANCE CHECK EVALUATION																
Test Date	Equiv. Tissue	SAR 1g (W/kg)			Dielectric Constant ϵ_r			Conductivity σ (mho/m)			ρ (Kg/m ³)	Amb. Temp. (°C)	Fluid Temp. (°C)	Fluid Depth (cm)	Humid. (%)	Barom. Press. (kPa)
		Freq. (MHz)	SPEAG Target	Meas.	Dev.	SPEAG Target	Meas.	Dev.	SPEAG Target	Meas.						
Feb 16	Body 450	1.78 $\pm 10\%$	1.80	+1.1%	56.7 $\pm 5\%$	56.5	-0.4%	0.94 $\pm 5\%$	0.91	-3.2%	1000	22.1	21.2	≥ 15	35	101.1
Notes	1.	The target SAR value is the measured value from the SAR system manufacturer's dipole calibration (see Appendix E).														
	2.	The target dielectric parameters are the nominal values from the SAR system manufacturer's dipole calibration (see Appendix E).														
	3.	The fluid temperature was measured prior to and after the system performance check to ensure the temperature remained within $\pm 2^\circ\text{C}$ of the fluid temperature reported during the dielectric parameter measurements.														
	4.	The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer (see Appendix C).														



System Performance Check Measurement Setup (IEEE Standard 1528-2003)

SPEAG 450 MHz Validation Dipole Setup

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO2104B	IC:	906B-2104B	
Model(s):	CXT425	DUT:	Portable GMRS/FRS PTT Radio Transceiver	462.5500 - 467.7125 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 7 of 36

	<u>Date(s) of Evaluation</u> February 16, 2010	<u>Test Report Serial No.</u> 0215BBO-T1008-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

8.0 SAR PROBE CALIBRATION & MEASUREMENT FREQUENCIES

The following procedures are recommended for measurements at 150 MHz - 3 GHz to minimize probe calibration and tissue dielectric parameter discrepancies. In general, SAR measurements below 300 MHz should be within ± 50 MHz of the probe calibration frequency. At 300 MHz to 3 GHz, measurements should be within ± 100 MHz of the probe calibration frequency. Measurements exceeding 50% of these intervals, ± 25 MHz < 300 MHz and ± 50 MHz ≥ 300 MHz, require additional steps (per FCC KDB 450824 D01 v01r01, SAR Probe Calibration and System Verification Considerations for Measurements at 150 MHz - 3 GHz - see reference [9]).

Probe Calibration Freq.	Device Measurement Freq.	Frequency Interval	± 50 MHz ≥ 300 MHz
450 MHz	462.7250 MHz	12.725 MHz	< 50 MHz
The probe calibration and measurement frequency interval is < 50 MHz; therefore the additional steps are not required.			


9.0 SIMULATED EQUIVALENT TISSUES



The simulated equivalent tissue recipes in the table below are derived from the SAR system manufacturer's suggested recipes in the DASY4 manual (see references [10] and [11]) in accordance with the procedures and requirements specified in IEEE Standard 1528-2003 (see reference [5]). The ingredient percentage may have been adjusted minimally in order to achieve the appropriate target dielectric parameters within the specified tolerance.

SIMULATED TISSUE MIXTURES		
INGREDIENT	450 MHz Head	450 MHz Body
Water	38.56 %	52.00 %
Sugar	56.32 %	45.65 %
Salt	3.95 %	1.75 %
HEC	0.98 %	0.50 %
Bactericide	0.19 %	0.10 %

10.0 SAR LIMITS


SAR RF EXPOSURE LIMITS			
FCC 47 CFR 2.1093	Health Canada Safety Code 6	General Population	Occupational
Spatial Average (averaged over the whole body)		0.08 W/kg	0.4 W/kg
Spatial Peak (averaged over any 1 g of tissue)		1.6 W/kg	8.0 W/kg
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)		4.0 W/kg	20.0 W/kg
The Spatial Average value of the SAR averaged over the whole body.			
The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.			
The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.			
Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.			
Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.			



Applicant:	Cobra Electronics Corporation	FCC ID:	BBO2104B	IC:	906B-2104B	
Model(s):	CXT425	DUT:	Portable GMRS/FRS PTT Radio Transceiver	462.5500 - 467.7125 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 8 of 36

	<u>Date(s) of Evaluation</u> February 16, 2010	<u>Test Report Serial No.</u> 0215BBO-T1008-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

11.0 ROBOT SYSTEM SPECIFICATIONS

<u>Specifications</u>	
Positioner	Stäubli Unimation Corp. Robot Model: RX60L
Repeatability	0.02 mm
No. of axis	6
<u>Data Acquisition Electronic (DAE) System</u>	
<u>Cell Controller</u>	
Processor	AMD Athlon XP 2400+
Clock Speed	2.0 GHz
Operating System	Windows XP Professional
<u>Data Converter</u>	
Features	Signal Amplifier, multiplexer, A/D converter, and control logic
Software	Measurement Software: DASY4, V4.7 Build 44
	Postprocessing Software: SEMCAD, V1.8 Build 171
Connecting Lines	Optical downlink for data and status info., Optical uplink for commands and clock
<u>DASY4 Measurement Server</u>	
Function	Real-time data evaluation for field measurements and surface detection
Hardware	PC/104 166MHz Pentium CPU; 32 MB chipdisk; 64 MB RAM
Connections	COM1, COM2, DAE, Robot, Ethernet, Service Interface
<u>E-Field Probe</u>	
Model	ET3DV6
Serial No.	1590
Construction	Triangular core fiber optic detection system
Frequency	10 MHz to 6 GHz
Linearity	±0.2 dB (30 MHz to 3 GHz)
<u>Evaluation Phantom</u>	
Type	Planar Phantom
Shell Material	Fiberglass
Thickness	2.0 ±0.1 mm
Volume	Approx. 70 liters
<u>Validation Phantom</u>	
Type	Planar Phantom
Shell Material	Fiberglass
Thickness	2.0 ±0.1 mm
Volume	Approx. 70 liters

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO2104B	IC:	906B-2104B	
Model(s):	CXT425	DUT:	Portable GMRS/FRS PTT Radio Transceiver	462.5500 - 467.7125 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 9 of 36

	<u>Date(s) of Evaluation</u> February 16, 2010	<u>Test Report Serial No.</u> 0215BBO-T1008-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> February 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

12.0 PROBE SPECIFICATION (ET3DV6)

Construction: Symmetrical design with triangular core;
Built-in shielding against static charges
PEEK enclosure material (resistant to organic solvents, glycol)

Calibration: In air from 10 MHz to 2.5 GHz
In head simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy $\pm 8\%$)

Frequency: 10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)

Directivity: ± 0.2 dB in head tissue (rotation around probe axis)
 ± 0.4 dB in head tissue (rotation normal to probe axis)

Dynamic Range: 5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB

Surface Detect: ± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces

Dimensions: Overall length: 330 mm; Tip length: 16 mm;
Body diameter: 12 mm; Tip diameter: 6.8 mm
Distance from probe tip to dipole centers: 2.7 mm

Application: General dosimetry up to 3 GHz; Compliance tests of mobile phone



ET3DV6 E-Field Probe

13.0 PLANAR PHANTOM

The planar phantom is a fiberglass shell phantom with a 2.0 mm (+/-0.2mm) thick device measurement area at the center of the phantom for SAR evaluations of devices with a larger surface area than the planar section of the SAM phantom. The planar phantom is integrated in a wooden table (see Appendix G for dimensions and specifications of the planar phantom). The planar phantom is used for test device SAR evaluations and daily system performance check evaluations.




Planar Phantom



14.0 DEVICE HOLDER

The DASY4 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. Face-held SAR evaluations (PTT radios) are performed with the device holder in the body axis. For evaluation of devices with a larger footprint (e.g. Laptop PC, Tablet PC), or to avoid perturbation due to device holder clamps for devices with a smaller footprint, a Plexiglas platform is attached to the device holder.




Device Holder



Applicant:	Cobra Electronics Corporation	FCC ID:	BBO2104B	IC:	906B-2104B	
Model(s):	CXT425	DUT:	Portable GMRS/FRS PTT Radio Transceiver	462.5500 - 467.7125 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 10 of 36

	<u>Date(s) of Evaluation</u> February 16, 2010	<u>Test Report Serial No.</u> 0215BBO-T1008-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

15.0 TEST EQUIPMENT LIST


TEST EQUIPMENT		ASSET NO.	SERIAL NO.	DATE CALIBRATED	CALIBRATION DUE DATE
USED	DESCRIPTION				
x	Schmid & Partner DASY4 System	-	-	-	-
x	-DASY4 Measurement Server	00158	1078	CNR	CNR
x	-Robot	00046	599396-01	CNR	CNR
x	-DAE4	00019	353	28Apr09	28Apr10
x	-ET3DV6 E-Field Probe	00017	1590	16Jul09	16Jul10
x	-SPEAG D450V3 Validation Dipole	000217	1068	18Jan10	18Jan11
x	-Barski Planar Phantom	00155	03-01	CNR	CNR
x	HP 85070C Dielectric Probe Kit	00033	US39240170	CNR	CNR
x	HP E4408B Spectrum Analyzer	00015	US39240170	23Apr08	28Apr10
x	Gigatronics 8652A Power Meter	00007	1835272	23Apr08	28Apr10
x	Gigatronics 80701A Power Sensor	00014	1833699	23Apr08	28Apr10
x	HP 8753ET Network Analyzer	00134	US39170292	28Apr08	28Apr10
x	Rohde & Schwarz SMR20 Signal Generator	00006	100104	CNR	CNR
x	Amplifier Research 5S1G4 Power Amplifier	00106	26235	CNR	CNR
Abbr.	CNR = Calibration Not Required				



Applicant:	Cobra Electronics Corporation	FCC ID:	BBO2104B	IC:	906B-2104B	
Model(s):	CXT425	DUT:	Portable GMRS/FRS PTT Radio Transceiver	462.5500 - 467.7125 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 11 of 36

	<u>Date(s) of Evaluation</u> February 16, 2010	<u>Test Report Serial No.</u> 0215BBO-T1008-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> February 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

16.0 MEASUREMENT UNCERTAINTIES


UNCERTAINTY BUDGET FOR DEVICE EVALUATION									
Uncertainty Component	IEEE 1528 Section	Uncertainty Value ±%	Probability Distribution	Divisor	ci 1g	ci 10g	Uncertainty Value ±% (1g)	Uncertainty Value ±% (10g)	V _i or V _{eff}
Measurement System									
Probe Calibration (450 MHz)	E.2.1	6.65	Normal	1	1	1	6.65	6.65	∞
Axial Isotropy	E.2.2	4.7	Rectangular	1.732050808	0.7	0.7	1.9	1.9	∞
Hemispherical Isotropy	E.2.2	9.6	Rectangular	1.732050808	0.7	0.7	3.9	3.9	∞
Boundary Effect	E.2.3	1	Rectangular	1.732050808	1	1	0.6	0.6	∞
Linearity	E.2.4	4.7	Rectangular	1.732050808	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1	Rectangular	1.732050808	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	0.3	Normal	1	1	1	0.3	0.3	∞
Response Time	E.2.7	0.8	Rectangular	1.732050808	1	1	0.5	0.5	∞
Integration Time	E.2.8	2.6	Rectangular	1.732050808	1	1	1.5	1.5	∞
RF Ambient Conditions	E.6.1	3	Rectangular	1.732050808	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	Rectangular	1.732050808	1	1	0.2	0.2	∞
Probe Positioning wrt Phantom Shell	E.6.3	2.9	Rectangular	1.732050808	1	1	1.7	1.7	∞
Extrapolation, interpolation & integration algorithms for max. SAR evaluation	E.5	1	Rectangular	1.732050808	1	1	0.6	0.6	∞
Test Sample Related									
Test Sample Positioning	E.4.2	2.9	Normal	1	1	1	2.9	2.9	12
Device Holder Uncertainty	E.4.1	3.6	Normal	1	1	1	3.6	3.6	8
SAR Drift Measurement	6.6.2	5	Rectangular	1.732050808	1	1	2.9	2.9	∞
Phantom and Tissue Parameters									
Phantom Uncertainty	E.3.1	4	Rectangular	1.732050808	1	1	2.3	2.3	∞
Liquid Conductivity (target)	E.3.2	5	Rectangular	1.732050808	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (measured)	E.3.3	3.2	Normal	1	0.64	0.43	2.0	1.4	∞
Liquid Permittivity (target)	E.3.2	5	Rectangular	1.732050808	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (measured)	E.3.3	2.8	Normal	1	0.6	0.49	1.7	1.4	∞
Combined Standard Uncertainty			RSS				11.32	11.05	
Expanded Uncertainty (95% Confidence Interval)			k=2				22.64	22.09	
Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003									



Applicant:	Cobra Electronics Corporation	FCC ID:	BBO2104B	IC:	906B-2104B		
Model(s):	CXT425	DUT:	Portable GMRS/FRS PTT Radio Transceiver	462.5500 - 467.7125 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 12 of 36

	<u>Date(s) of Evaluation</u> February 16, 2010	<u>Test Report Serial No.</u> 0215BBO-T1008-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	


17.0 REFERENCES



- [1] Federal Communications Commission - "Radiofrequency radiation exposure evaluation: portable devices", Rule Part 47 CFR §2.1093.
- [2] Health Canada - "Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz", Safety Code 6: 1999.
- [3] Federal Communications Commission - "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.
- [4] Industry Canada - "Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)", Radio Standards Specification RSS-102 Issue 3: June 2009.
- [5] IEEE Standard 1528-2003 - "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques": December 2003.
- [6] International Standard IEC 62209-1:2005 - "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures."
- [7] International Standard IEC 62209-2 Draft (106-62209-2-CDV_090323) - "Human exposure to radio frequency fields from hand-held & body-mounted wireless comm. devices - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (30 MHz to 6 GHz)".
- [8] Federal Communications Commission, Office of Engineering and Technology - "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies"; KDB 447498 D01v04: November 2009.
- [9] Federal Communications Commission, Office of Engineering and Technology - "Application Note: SAR Probe Calibration and System Verification Considerations for Measurements at 150 MHz - 3 GHz"; KDB 450824 D01 v01r01: January 2007.
- [[10] Schmid & Partner Engineering AG - DASY4 Manual V4.6, Chapter 16 Application Note, Head Tissue Recipe: Sept. 2005.
- [11] Schmid & Partner Engineering AG - DASY4 Manual V4.6, Chapter 17 Application Note, Body Tissue Recipe: Sept. 2005.

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO2104B	IC:	906B-2104B	
Model(s):	CXT425	DUT:	Portable GMRS/FRS PTT Radio Transceiver	462.5500 - 467.7125 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 13 of 36

	<u>Date(s) of Evaluation</u> February 16, 2010	<u>Test Report Serial No.</u> 0215BBO-T1008-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

APPENDIX A - SAR MEASUREMENT DATA

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO2104B	IC:	906B-2104B	
Model(s):	CXT425	DUT:	Portable GMRS/FRS PTT Radio Transceiver	462.5500 - 467.7125 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 14 of 36

	<u>Date(s) of Evaluation</u> February 16, 2010	<u>Test Report Serial No.</u> 0215BBO-T1008-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

Date Tested: 02/16/2010

Face-held SAR - GMRS - Channel 22 - 462.7250 MHz - Ni-MH AAA Rechargeable Batteries

DUT: Cobra; Model: CXT425; Type: Portable GMRS/FRS PTT Radio Transceiver; Serial: #18

Ambient Temp: 22.9°C; Fluid Temp: 21.8°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: UHF FM (CW)

Frequency: 462.725 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used: $f = 462.725 \text{ MHz}$; $\sigma = 0.85 \text{ mho/m}$; $\epsilon_r = 44.7$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.34, 7.34, 7.34); Calibrated: 16/07/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 28/04/2009
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASy4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Face-held SAR - 2.5 cm Spacing from Front of DUT to Planar Phantom

Area Scan (7x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.04 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 34.1 V/m; Power Drift = -0.746 dB



Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.883 mW/g; SAR(10 g) = 0.644 mW/g

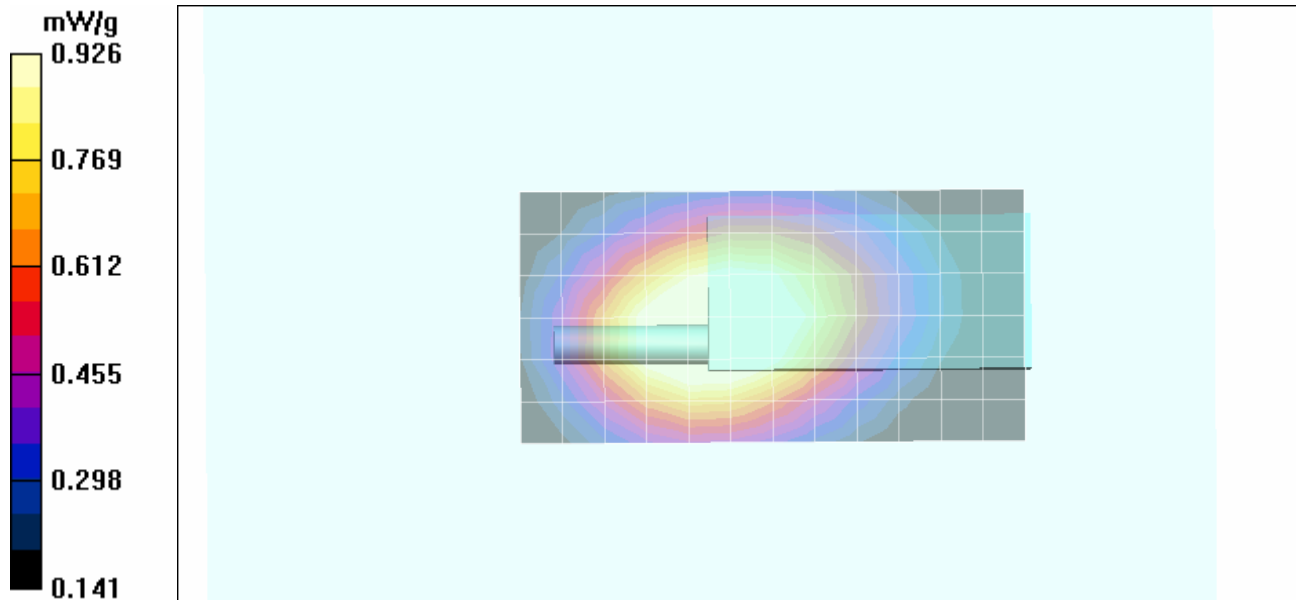Maximum value of SAR (measured) = 0.926 mW/g



Applicant:	Cobra Electronics Corporation	FCC ID:	BBO2104B	IC:	906B-2104B	
Model(s):	CXT425	DUT:	Portable GMRS/FRS PTT Radio Transceiver	462.5500 - 467.7125 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 15 of 36

	<u>Date(s) of Evaluation</u> February 16, 2010	<u>Test Report Serial No.</u> 0215BBO-T1008-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

Date Tested: 02/16/2010

Face-held SAR - GMRS - Channel 22 - 462.7250 MHz - Energizer AAA Alkaline Batteries

DUT: Cobra; Model: CXT425; Type: Portable GMRS/FRS PTT Radio Transceiver; Serial: #18

Ambient Temp: 22.9°C; Fluid Temp: 21.8°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: UHF FM (CW)

Frequency: 462.725 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used: $f = 462.725 \text{ MHz}$; $\sigma = 0.85 \text{ mho/m}$; $\epsilon_r = 44.7$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.34, 7.34, 7.34); Calibrated: 16/07/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 28/04/2009
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASy4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Face-held SAR - 2.5 cm Spacing from Front of DUT to Planar Phantom

Area Scan (7x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.870 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 34.4 V/m; Power Drift = -0.993 dB

Peak SAR (extrapolated) = 1.23 W/kg


SAR(1 g) = 0.887 mW/g; SAR(10 g) = 0.647 mW/g

Maximum value of SAR (measured) = 0.926 mW/g

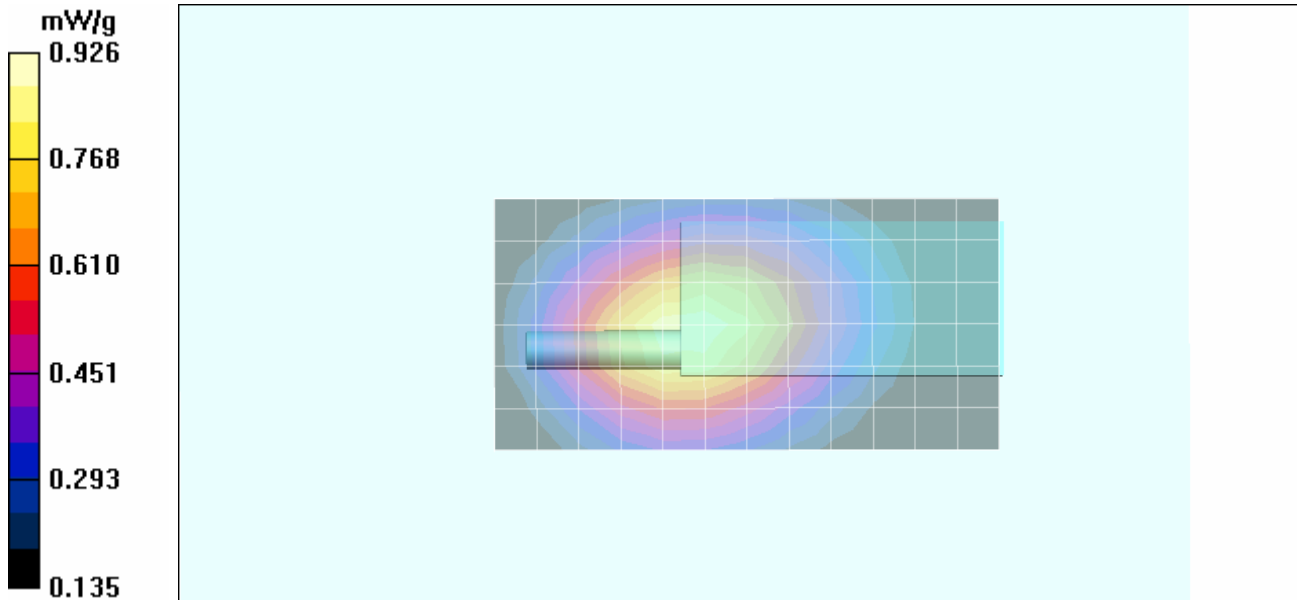


Applicant:	Cobra Electronics Corporation	FCC ID:	BBO2104B	IC:	906B-2104B	
Model(s):	CXT425	DUT:	Portable GMRS/FRS PTT Radio Transceiver	462.5500 - 467.7125 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 16 of 36

Z-Axis Scan

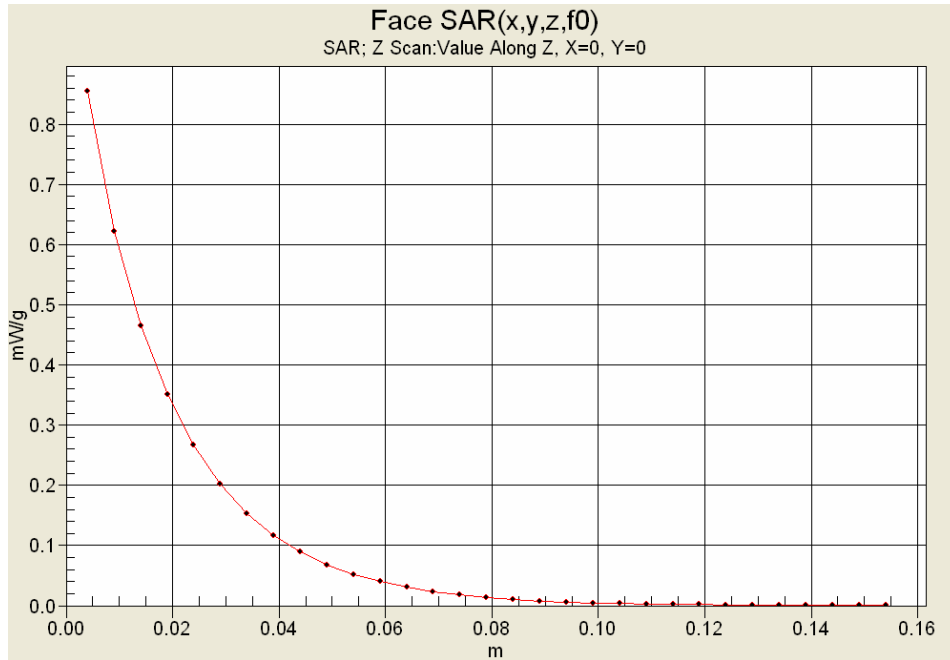



SAR-versus-Time Droop Evaluation

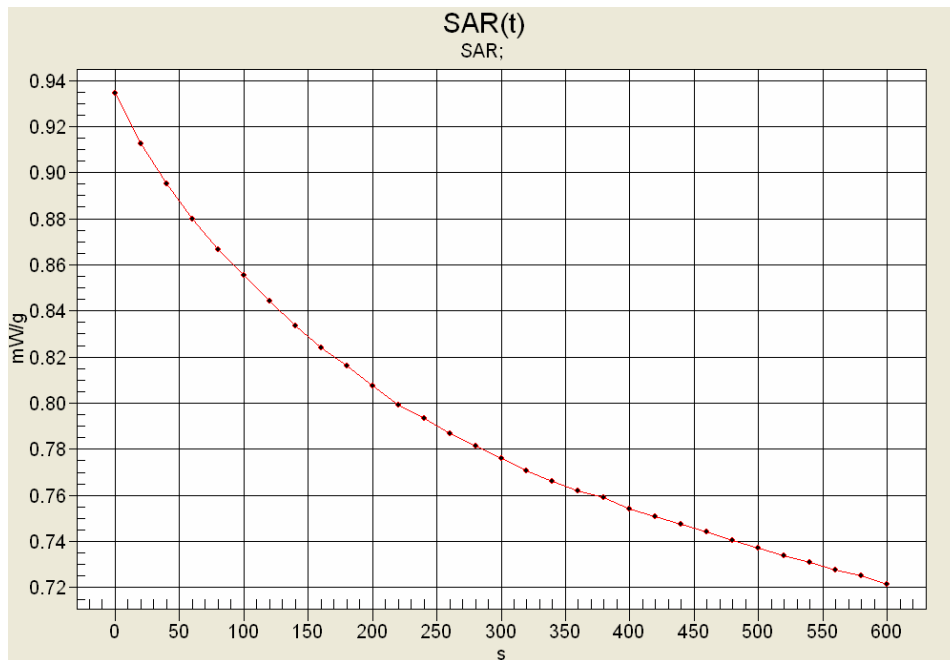Face-held Configuration
 GMRS Ch. 22 (462.7250 MHz)
 Alkaline AAA Batteries



Start SAR: 0.934 mW/g
 End SAR: 0.722 mW/g (-1.12 dB)
 SAR after 340s: 0.766 mW/g (-0.861 dB)
 (340s = Zoom Scan Duration)
 (600s = Area Scan Duration)

	<u>Date(s) of Evaluation</u> February 16, 2010	<u>Test Report Serial No.</u> 0215BBO-T1008-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> February 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

Date Tested: 02/16/2010

Body-worn SAR - GMRS - Channel 22 - 462.7250 MHz - Ni-MH AAA Rechargeable Batteries

DUT: Cobra; Model: CXT425; Type: Portable GMRS/FRS PTT Radio Transceiver; Serial: #18

Body-worn Accessory: Plastic Belt-Clip; Audio Accessory: Earbud Lapel-Microphone with PTT (P/N: GA-EBM2)

Ambient Temp: 22.1°C; Fluid Temp: 21.2°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: UHF FM (CW)

Frequency: 462.725 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used: $f = 462.725 \text{ MHz}$; $\sigma = 0.91 \text{ mho/m}$; $\epsilon_r = 56$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.34, 7.34, 7.34); Calibrated: 16/07/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 28/04/2009
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn SAR - 0.8 cm Belt-Clip Spacing from Back of DUT to Planar Phantom

Area Scan (7x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.11 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 34.6 V/m; Power Drift = -0.432 dB



Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.726 mW/g

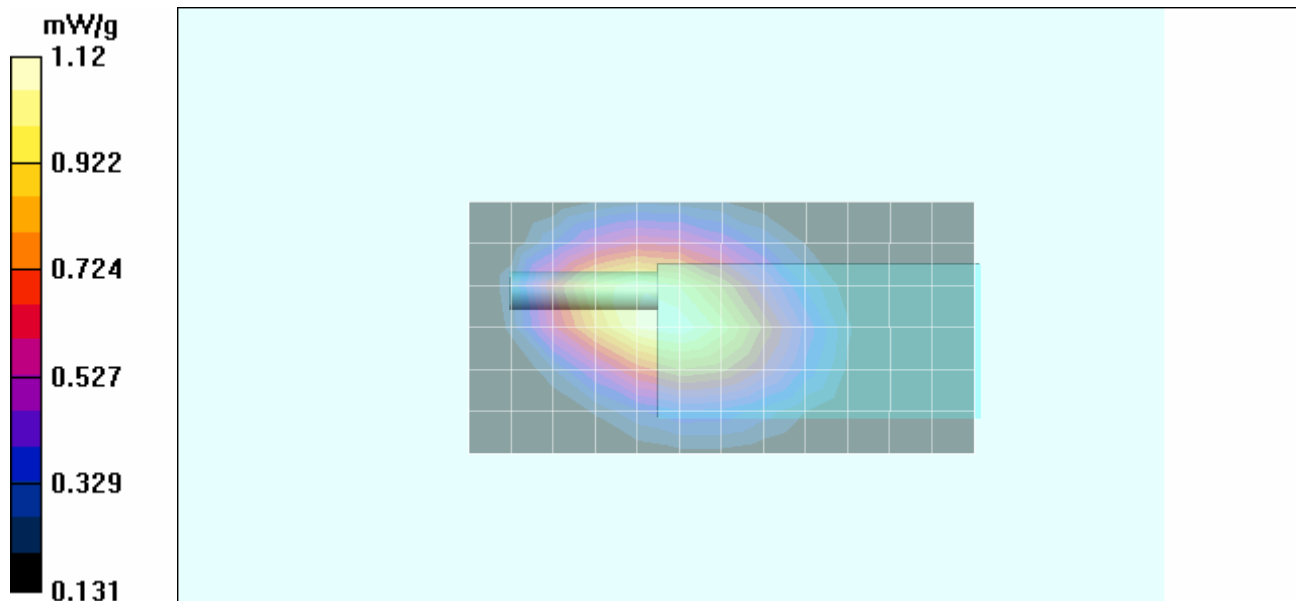Maximum value of SAR (measured) = 1.12 mW/g



Applicant:	Cobra Electronics Corporation	FCC ID:	BBO2104B	IC:	906B-2104B	
Model(s):	CXT425	DUT:	Portable GMRS/FRS PTT Radio Transceiver	462.5500 - 467.7125 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 18 of 36

	<u>Date(s) of Evaluation</u> February 16, 2010	<u>Test Report Serial No.</u> 0215BBO-T1008-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> February 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

Date Tested: 02/16/2010

Body-worn SAR - GMRS - Channel 22 - 462.7250 MHz - Energizer Alkaline AAA Batteries

DUT: Cobra; Model: CXT425; Type: Portable GMRS/FRS PTT Radio Transceiver; Serial: #18

Body-worn Accessory: Plastic Belt-Clip; Audio Accessory: Earbud Lapel-Microphone with PTT (P/N: GA-EBM2)

Ambient Temp: 22.1°C; Fluid Temp: 21.2°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: UHF FM (CW)

Frequency: 462.725 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used: $f = 462.725 \text{ MHz}$; $\sigma = 0.91 \text{ mho/m}$; $\epsilon_r = 56$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.34, 7.34, 7.34); Calibrated: 16/07/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 28/04/2009
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn SAR - 0.8 cm Belt-Clip Spacing from Back of DUT to Planar Phantom

Area Scan (7x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.07 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 34.1 V/m; Power Drift = -0.813 dB



Peak SAR (extrapolated) = 1.56 W/kg

SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.733 mW/g

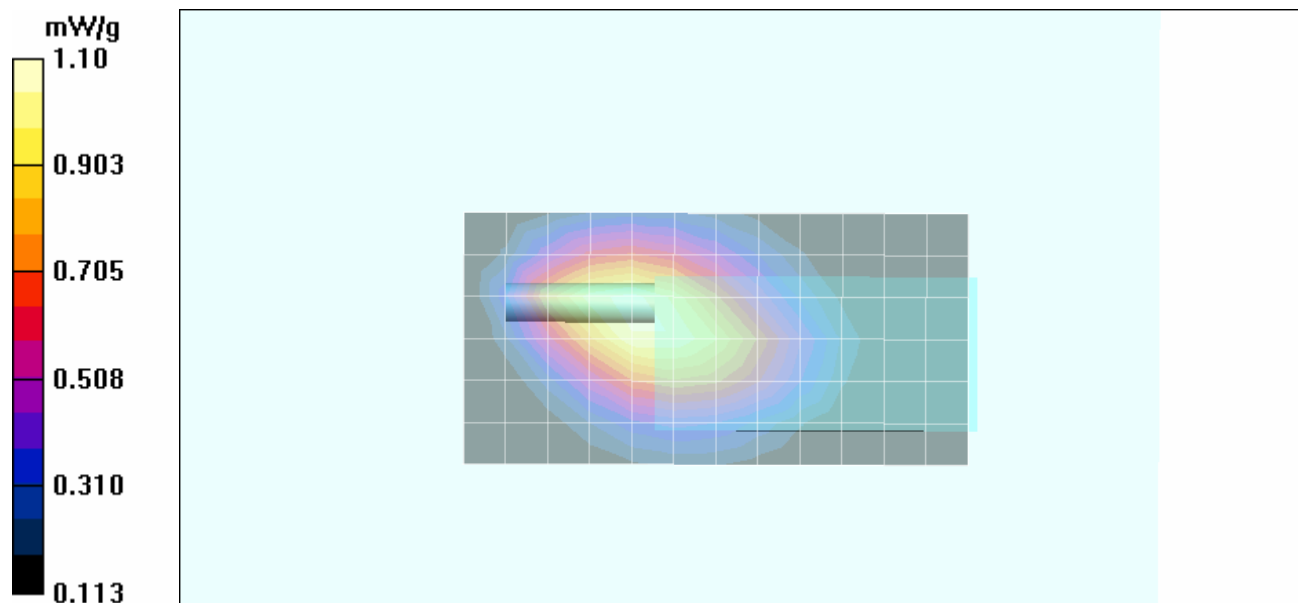
Maximum value of SAR (measured) = 1.10 mW/g






Applicant:	Cobra Electronics Corporation	FCC ID:	BBO2104B	IC:	906B-2104B	
Model(s):	CXT425	DUT:	Portable GMRS/FRS PTT Radio Transceiver	462.5500 - 467.7125 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 19 of 36

	<u>Date(s) of Evaluation</u> February 16, 2010	<u>Test Report Serial No.</u> 0215BBO-T1008-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> February 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

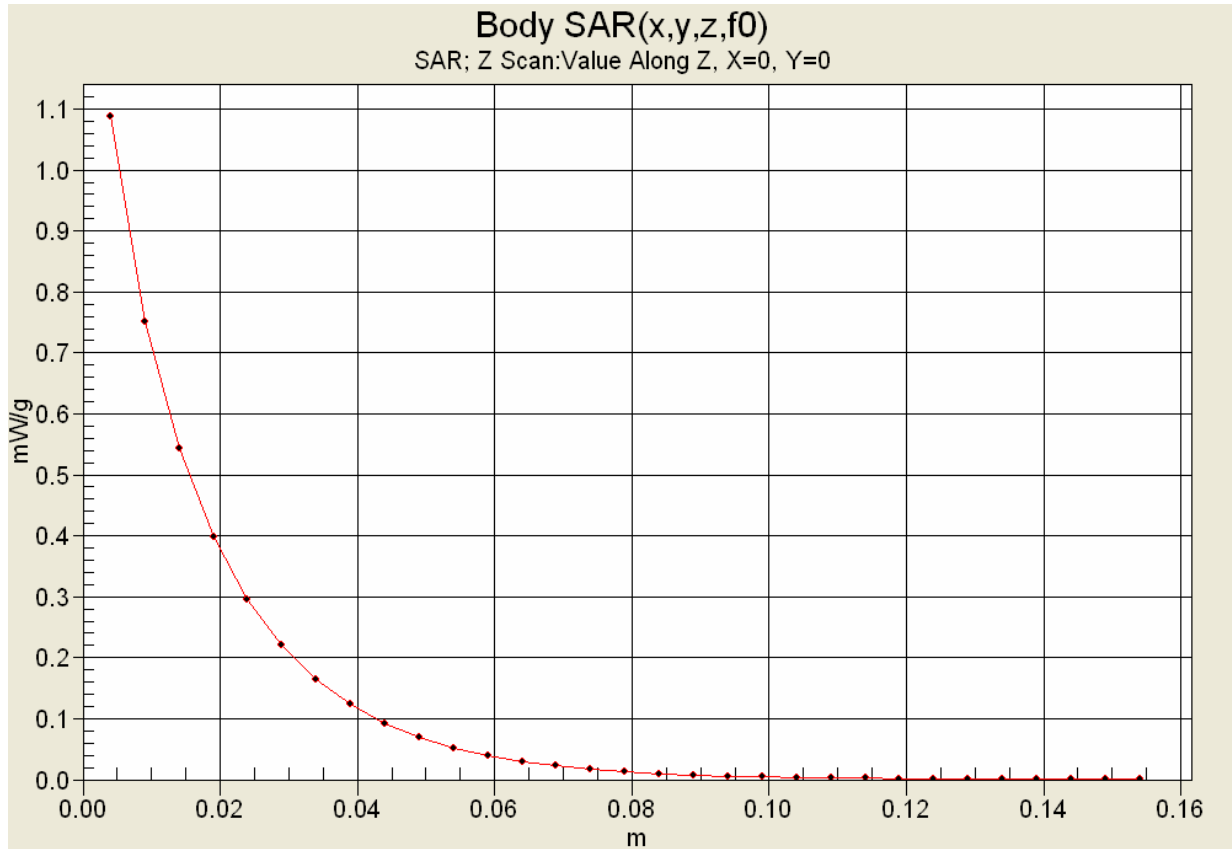
Z-Axis Scan






Applicant:	Cobra Electronics Corporation	FCC ID:	BBO2104B	IC:	906B-2104B	
Model(s):	CXT425	DUT:	Portable GMRS/FRS PTT Radio Transceiver	462.5500 - 467.7125 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 20 of 36

	<u>Date(s) of Evaluation</u> February 16, 2010	<u>Test Report Serial No.</u> 0215BBO-T1008-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

APPENDIX B - SYSTEM PERFORMANCE CHECK DATA

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO2104B	IC:	906B-2104B	
Model(s):	CXT425	DUT:	Portable GMRS/FRS PTT Radio Transceiver	462.5500 - 467.7125 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 21 of 36

	<u>Date(s) of Evaluation</u> February 16, 2010	<u>Test Report Serial No.</u> 0215BBO-T1008-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	  Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

Date Tested: 02/16/2010

System Performance Check - 450 MHz Dipole - MSL

DUT: Dipole D450V3; Asset: 000217; Serial: 1068; Calibration: 01/18/2010


Ambient Temp: 22.1°C; Fluid Temp: 21.2°C; Barometric Pressure: 101.1 kPa; Humidity: 35%


Communication System: CW
Forward Conducted Power: 398 mW
Frequency: 450 MHz; Duty Cycle: 1:1
Medium: M450 Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.91 \text{ mho/m}$; $\epsilon_r = 56.5$; $\rho = 1000 \text{ kg/m}^3$



- Probe: ET3DV6 - SN1590; ConvF(7.34, 7.34, 7.34); Calibrated: 16/07/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 28/04/2009
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

System Performance Check - 450 MHz Dipole

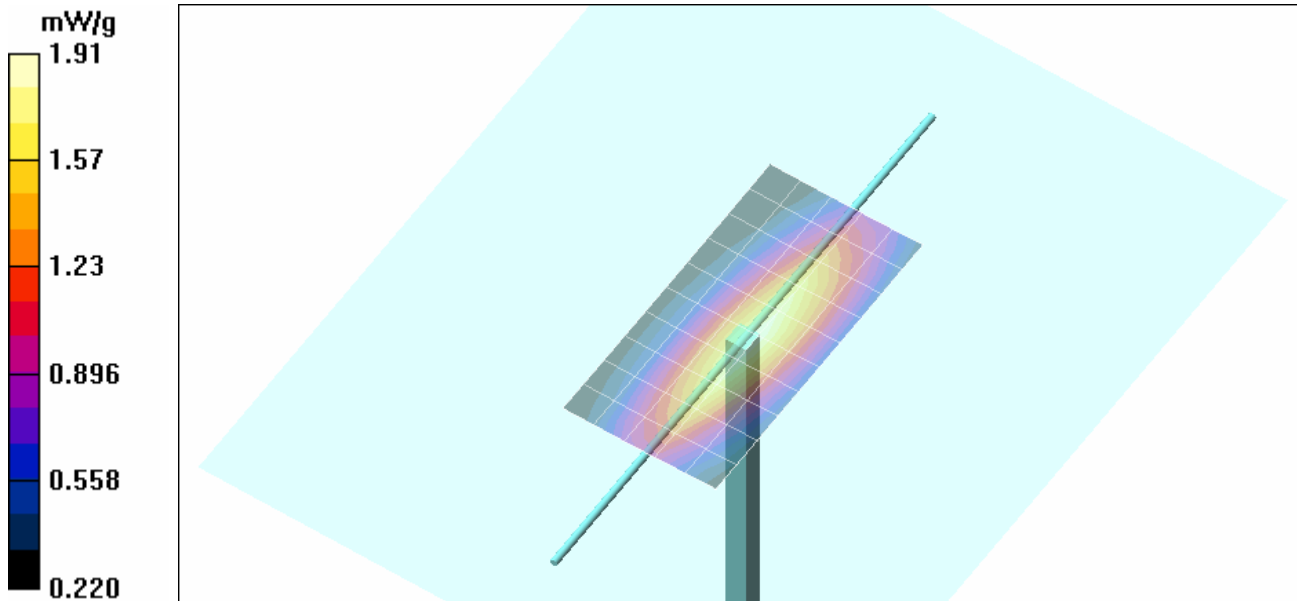
Area Scan (6x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 1.91 mW/g
Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 43.7 V/m; Power Drift = 0.050 dB
Peak SAR (extrapolated) = 2.81 W/kg
SAR(1 g) = 1.8 mW/g; SAR(10 g) = 1.2 mW/g






Applicant:	Cobra Electronics Corporation	FCC ID:	BBO2104B	IC:	906B-2104B	
Model(s):	CXT425	DUT:	Portable GMRS/FRS PTT Radio Transceiver	462.5500 - 467.7125 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 22 of 36

	<u>Date(s) of Evaluation</u> February 16, 2010	<u>Test Report Serial No.</u> 0215BBO-T1008-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

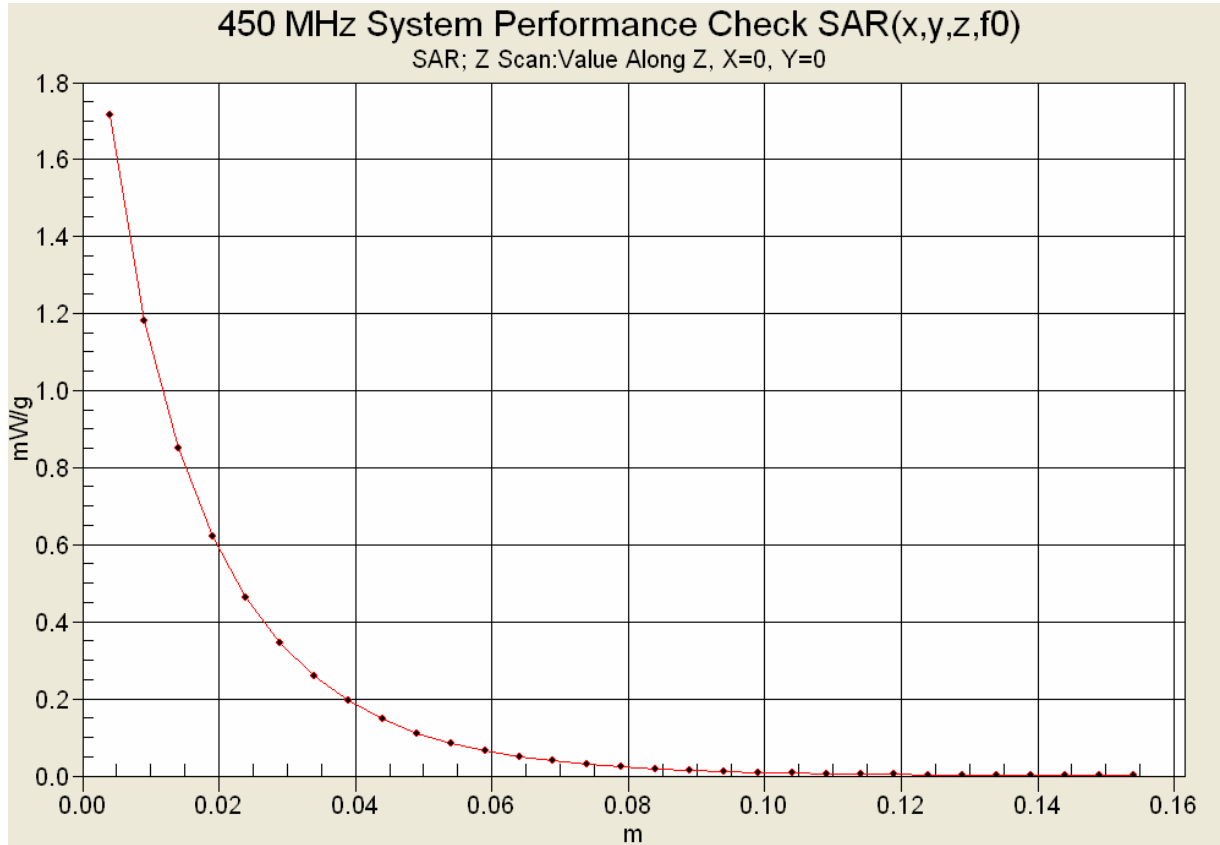
Z-Axis Scan





Applicant:	Cobra Electronics Corporation	FCC ID:	BBO2104B	IC:	906B-2104B	
Model(s):	CXT425	DUT:	Portable GMRS/FRS PTT Radio Transceiver	462.5500 - 467.7125 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 23 of 36

	<u>Date(s) of Evaluation</u> February 16, 2010	<u>Test Report Serial No.</u> 0215BBO-T1008-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS


Applicant:	Cobra Electronics Corporation	FCC ID:	BBO2104B	IC:	906B-2104B	
Model(s):	CXT425	DUT:	Portable GMRS/FRS PTT Radio Transceiver	462.5500 - 467.7125 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 24 of 36



	<u>Date(s) of Evaluation</u> February 16, 2010	<u>Test Report Serial No.</u> 0215BBO-T1008-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> February 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

460 MHz DUT Evaluation (Head)

Celltech Labs Inc.
 Test Result for UIM Dielectric Parameter
 16/Feb/2010
 Frequency (GHz)
 FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
 FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma
 Test_e Epsilon of UIM
 Test_s Sigma of UIM

Freq	FCC_eHFCC_sH	Test_e	Test_s
0.3500	44.70	0.87	47.85
0.3600	44.58	0.87	46.38
0.3700	44.46	0.87	46.82
0.3800	44.34	0.87	46.59
0.3900	44.22	0.87	46.06
0.4000	44.10	0.87	45.42
0.4100	43.98	0.87	45.65
0.4200	43.86	0.87	45.24
0.4300	43.74	0.87	44.76
0.4400	43.62	0.87	44.52
0.4500	43.50	0.87	44.32
0.4600	43.45	0.87	44.70
0.4700	43.40	0.87	44.36
0.4800	43.34	0.87	43.94
0.4900	43.29	0.87	44.24
0.5000	43.24	0.87	43.52
0.5100	43.19	0.87	43.73
0.5200	43.14	0.88	43.50
0.5300	43.08	0.88	43.45
0.5400	43.03	0.88	42.69
0.5500	42.98	0.88	43.38


Applicant:	Cobra Electronics Corporation	FCC ID:	BBO2104B	IC:	906B-2104B	
Model(s):	CXT425	DUT:	Portable GMRS/FRS PTT Radio Transceiver	462.5500 - 467.7125 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 25 of 36



	<u>Date(s) of Evaluation</u> February 16, 2010	<u>Test Report Serial No.</u> 0215BBO-T1008-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> February 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

450 MHz System Performance Check & 460 MHz DUT Evaluation (Body)


Celltech Labs Inc.
 Test Result for UIM Dielectric Parameter
 16/Feb/2010
 Frequency (GHz)
 FCC_eHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon
 FCC_sHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma
 FCC_eB FCC Limits for Body Epsilon
 FCC_sB FCC Limits for Body Sigma
 Test_e Epsilon of UIM
 Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.3500	57.70	0.93	58.18	0.83
0.3600	57.60	0.93	56.98	0.82
0.3700	57.50	0.93	57.58	0.84
0.3800	57.40	0.93	57.31	0.85
0.3900	57.30	0.93	56.67	0.85
0.4000	57.20	0.93	56.57	0.85
0.4100	57.10	0.93	56.87	0.88
0.4200	57.00	0.94	56.41	0.88
0.4300	56.90	0.94	56.02	0.88
0.4400	56.80	0.94	55.76	0.88
0.4500	56.70	0.94	56.54	0.91
0.4600	56.66	0.94	56.00	0.91
0.4700	56.62	0.94	55.27	0.91
0.4800	56.58	0.94	55.37	0.92
0.4900	56.54	0.94	55.61	0.94
0.5000	56.51	0.94	55.35	0.94
0.5100	56.47	0.94	55.41	0.97
0.5200	56.43	0.95	55.10	0.95
0.5300	56.39	0.95	55.36	0.96
0.5400	56.35	0.95	54.53	0.99
0.5500	56.31	0.95	55.13	0.98


Applicant:	Cobra Electronics Corporation	FCC ID:	BBO2104B	IC:	906B-2104B	
Model(s):	CXT425	DUT:	Portable GMRS/FRS PTT Radio Transceiver	462.5500 - 467.7125 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 26 of 36



	<u>Date(s) of Evaluation</u> February 16, 2010	<u>Test Report Serial No.</u> 0215BBO-T1008-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS


Applicant:	Cobra Electronics Corporation	FCC ID:	BBO2104B	IC:	906B-2104B	
Model(s):	CXT425	DUT:	Portable GMRS/FRS PTT Radio Transceiver	462.5500 - 467.7125 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 27 of 36

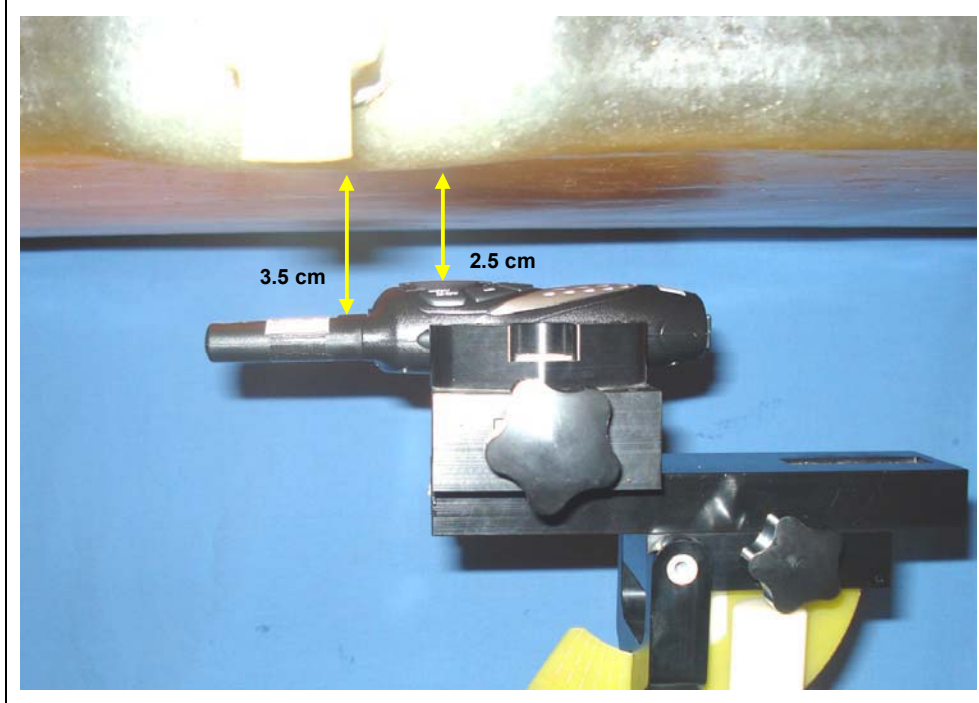
FACE-HELD SAR TEST SETUP PHOTOGRAPHS
2.5 cm Spacing from Front of DUT to Planar Phantom





	<u>Date(s) of Evaluation</u> February 16, 2010	<u>Test Report Serial No.</u> 0215BBO-T1008-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

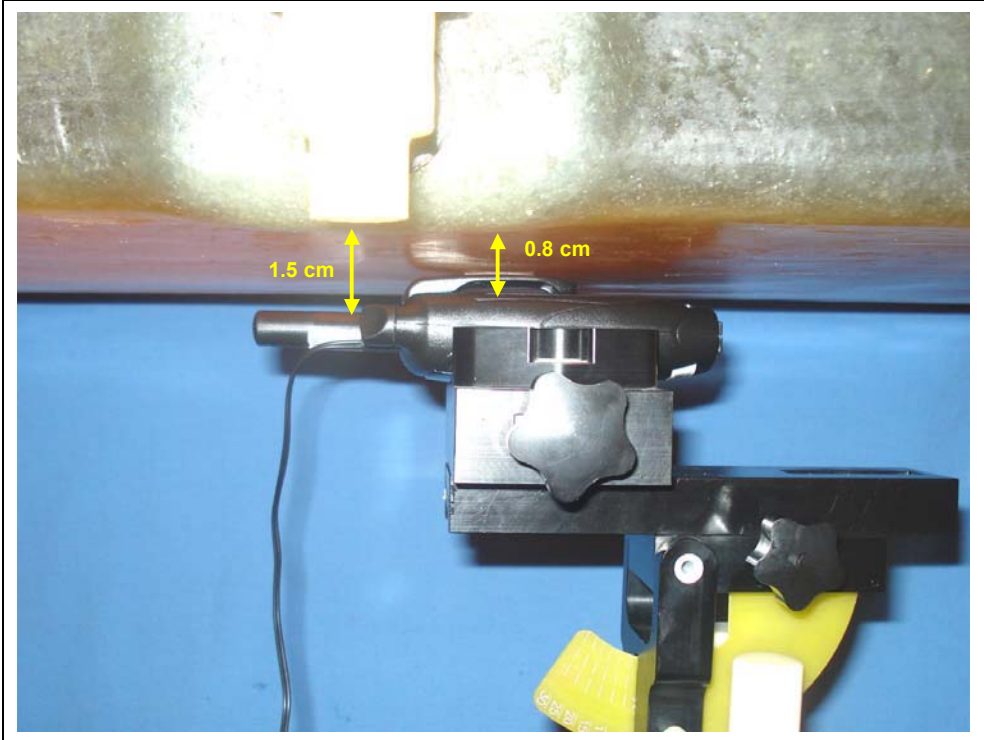BODY-WORN SAR TEST SETUP PHOTOGRAPHS
0.8 cm Belt-Clip Spacing from Back of DUT to Planar Phantom
DUT with Earbud Lapel-Microphone Audio Accessory



Applicant:	Cobra Electronics Corporation	FCC ID:	BBO2104B	IC:	906B-2104B	
Model(s):	CXT425	DUT:	Portable GMRS/FRS PTT Radio Transceiver	462.5500 - 467.7125 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 29 of 36

	<u>Date(s) of Evaluation</u> February 16, 2010	<u>Test Report Serial No.</u> 0215BBO-T1008-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	


DUT PHOTOGRAPHS





Front Side of DUT Back Side of DUT Back Side of DUT with Plastic Belt-Clip




Top End of DUT Bottom End of DUT



Applicant:	Cobra Electronics Corporation	FCC ID:	BBO2104B	IC:	906B-2104B	
Model(s):	CXT425	DUT:	Portable GMRS/FRS PTT Radio Transceiver	462.5500 - 467.7125 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 30 of 36

	<u>Date(s) of Evaluation</u> February 16, 2010	<u>Test Report Serial No.</u> 0215BBO-T1008-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

DUT PHOTOGRAPHS


				
Left Side of DUT with Plastic Belt-Clip		Left Side of DUT with Plastic Belt-Clip		
				
Right Side of DUT with Plastic Belt-Clip		Right Side of DUT with Plastic Belt-Clip		
				
DUT Battery Housing	DUT with Ni-MH AAA Batt.	DUT with Alkaline AAA Batt.	Plastic Belt-Clip Accessory (supplied with DUT)	



Applicant:	Cobra Electronics Corporation	FCC ID:	BBO2104B	IC:	906B-2104B	
Model(s):	CXT425	DUT:	Portable GMRS/FRS PTT Radio Transceiver	462.5500 - 467.7125 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 31 of 36

	<u>Date(s) of Evaluation</u> February 16, 2010	<u>Test Report Serial No.</u> 0215BBO-T1008-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

DUT PHOTOGRAPHS




Applicant:	Cobra Electronics Corporation	FCC ID:	BBO2104B	IC:	906B-2104B	
Model(s):	CXT425	DUT:	Portable GMRS/FRS PTT Radio Transceiver	462.5500 - 467.7125 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 32 of 36



	<u>Date(s) of Evaluation</u> February 16, 2010	<u>Test Report Serial No.</u> 0215BBO-T1008-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

DUT PHOTOGRAPHS




DUT configuration for conducted output power measurement

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO2104B	IC:	906B-2104B	
Model(s):	CXT425	DUT:	Portable GMRS/FRS PTT Radio Transceiver	462.5500 - 467.7125 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 33 of 36

	<u>Date(s) of Evaluation</u> February 16, 2010	<u>Test Report Serial No.</u> 0215BBO-T1008-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

APPENDIX E - DIPOLE CALIBRATION

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO2104B	IC:	906B-2104B	
Model(s):	CXT425	DUT:	Portable GMRS/FRS PTT Radio Transceiver	462.5500 - 467.7125 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 34 of 36



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Celltech**

Certificate No.: **D450V3-1068 Jan10**

CALIBRATION CERTIFICATE

Object **D450V3 - SN: 1068**

Calibration procedure(s) **QA CAL-15.v5
Calibration Procedure for dipole validation kits below 800 MHz**

Calibration date: **January 18, 2010**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-09 (No. 217-01030)	Apr-10
Power sensor E4412A	MY41495277	1-Apr-09 (No. 217-01030)	Apr-10
Power sensor E4412A	MY41498087	1-Apr-09 (No. 217-01030)	Apr-10
Reference 3 dB Attenuator	SN: S5054 (3c)	31-Mar-09 (No. 217-01026)	Mar-10
Reference 20 dB Attenuator	SN: S5086 (20b)	31-Mar-09 (No. 217-01028)	Mar-10
Type-N mismatch combination	SN: 5047.2 / 06327	31-Mar-09 (No. 217-01029)	Mar-10
Reference Probe ET3DV6 (LF)	SN: 1507	03-Jul-09 (No. ET3-1507_Jul09)	Jul-10
DAE4	SN: 654	04-May-09 (No. DAE4-654_May09)	May-10
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	04-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-09)	In house check: Oct-10

Calibrated by: **Jeton Kastrati** Function: **Laboratory Technician** Signature: *i.v. [Signature]*

Approved by: **Katja Pokovic** Technical Manager *[Signature]*

Issued: January 20, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V5.2
Extrapolation	Advanced Extrapolation	
Phantom	ELI4 Flat Phantom	Shell thickness: 2 ± 0.2 mm
Distance Dipole Center - TSL	15 mm	with Spacer
Area Scan Resolution	dx, dy = 15 mm	
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	450 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	43.5	0.87 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	44.2 \pm 6 %	0.86 mho/m \pm 6 %
Head TSL temperature during test	(22.0 \pm 0.2) °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	condition	
SAR measured	398 mW input power	1.87 mW / g
SAR normalized	normalized to 1W	4.70 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	4.76 mW / g \pm 18.1 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	398 mW input power	1.25 mW / g
SAR normalized	normalized to 1W	3.14 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	3.17 mW / g \pm 17.6 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	56.7	0.94 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	54.1 ± 6 %	0.90 mho/m ± 6 %
Body TSL temperature during test	(22.0 ± 0.2) °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	condition	
SAR measured	398 mW input power	1.78 mW / g
SAR normalized	normalized to 1W	4.47 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	4.58 mW / g ± 18.1 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	398 mW input power	1.19 mW / g
SAR normalized	normalized to 1W	2.99 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	3.06 mW / g ± 17.6 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	57.5 Ω - 5.9 j Ω
Return Loss	- 21.0 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	54.8 Ω - 9.3 j Ω
Return Loss	- 20.0 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.350 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	July 16, 2009

DASY5 Validation Report for Head TSL

Date/Time: 1/18/2010 10:59:37 AM

DUT: Dipole 450 MHz; Type: D450V3; Serial: D450V3 - SN:1068

Communication System: CW; Frequency: 450 MHz; Duty Cycle: 1:1

Medium: HSL450

Medium parameters used: $f = 450$ MHz; $\sigma = 0.86$ mho/m; $\epsilon_r = 44.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ET3DV6 - SN1507 (LF); ConvF(6.66, 6.66, 6.66); Calibrated: 7/3/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn654; Calibrated: 5/4/2009
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1003
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 57

Head/d=15mm, Pin=398mW/Area Scan (41x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.99 mW/g


Head/d=15mm, Pin=398mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 50.2 V/m; Power Drift = -0.020 dB

Peak SAR (extrapolated) = 2.78 W/kg

SAR(1 g) = 1.87 mW/g; SAR(10 g) = 1.25 mW/g

Maximum value of SAR (measured) = 2 mW/g

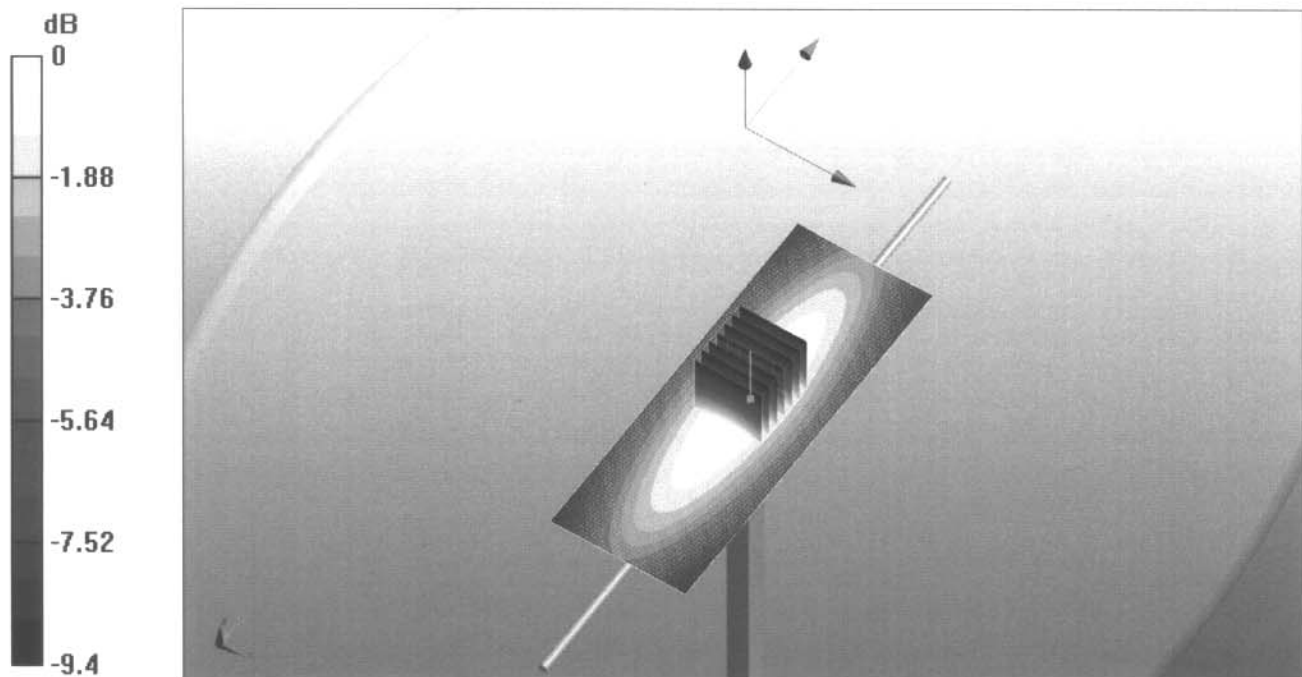

0 dB = 2mW/g

Impedance Measurement Plot for Head TSL

18 Jan 2010 10:25:40

CH1 S11 1 U FS

1: 57.502 Ω -5.9180 Ω 59.763 pF


450.000 000 MHz

*
Del

Cor

Avg
16

↑

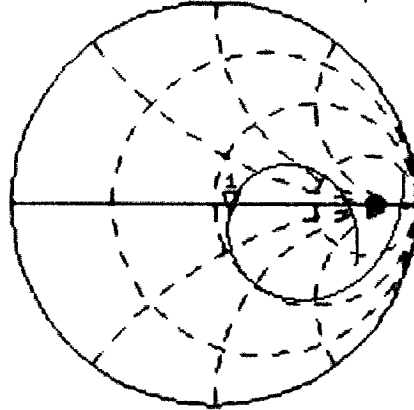

CH2 S11 LOG

5 dB/REF -20 dB


1: -21.035 dB

450.000 000 MHz

Cor

Avg
16

↑

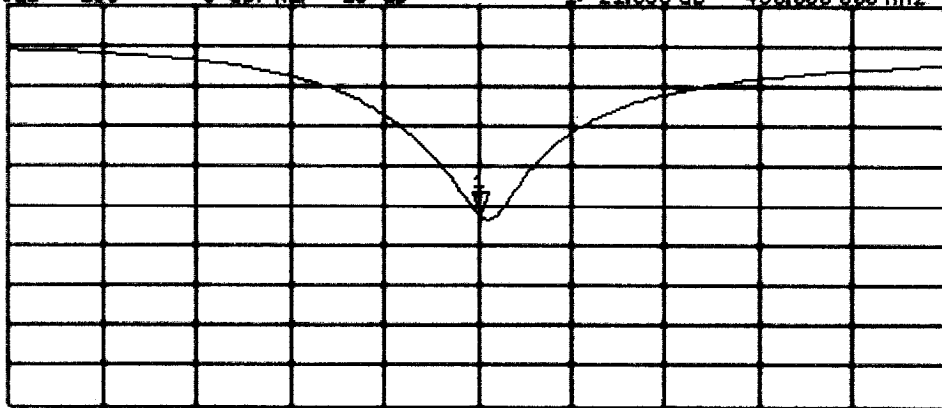

START 250.000 000 MHz

STOP 650.000 000 MHz

DASY5 Validation Report for Body TSL

Date/Time: 1/18/2010 1:24:11 PM

DUT: Dipole 450 MHz; Type: D450V3; Serial: D450V3 - SN:1068

Communication System: CW; Frequency: 450 MHz; Duty Cycle: 1:1

Medium: MSL450

Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.9 \text{ mho/m}$; $\epsilon_r = 54.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ET3DV6 - SN1507 (LF); ConvF(7.11, 7.11, 7.11); Calibrated: 7/3/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn654; Calibrated: 5/4/2009
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1003
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 57

Body/d=15mm, Pin=398mW/Area Scan (61x201x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 1.9 mW/g


Body/d=15mm, Pin=398mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 47.4 V/m; Power Drift = -0.034 dB

Peak SAR (extrapolated) = 2.71 W/kg

SAR(1 g) = 1.78 mW/g; SAR(10 g) = 1.19 mW/g

Maximum value of SAR (measured) = 1.9 mW/g

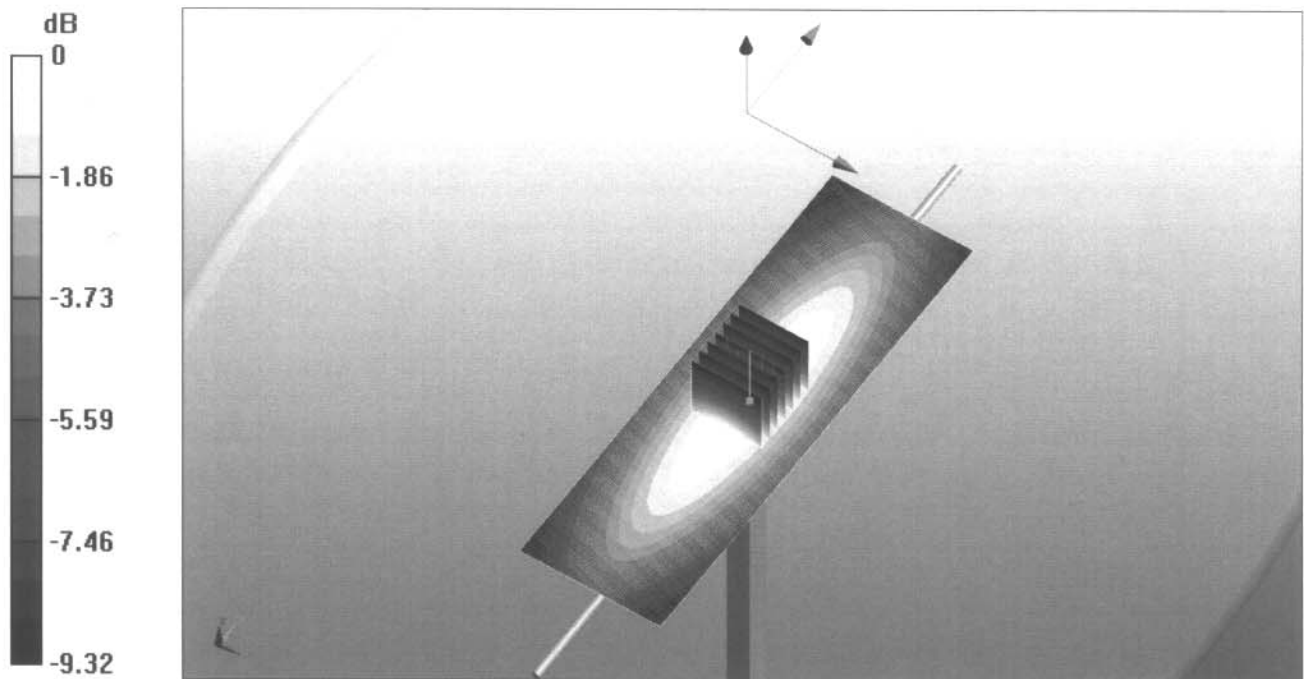

0 dB = 1.9mW/g

Impedance Measurement Plot for Body TSL


18 Jan 2010 12:18:41

CH1 S11 1 U FS

1: 54.824 Ω -9.3047 Ω 38.011 pF

450.000 000 MHz

*
Del
Cor

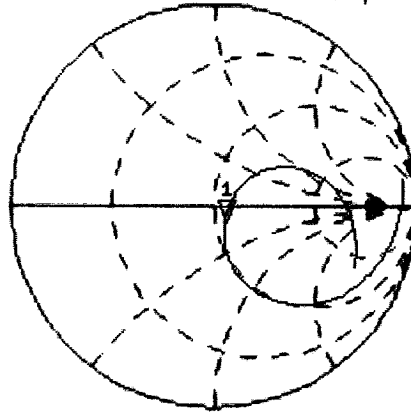

Avg
16


↑

CH2 S11 L06 5 dB/REF -20 dB 1:-20.034 dB 450.000 000 MHz

Cor



Avg
16

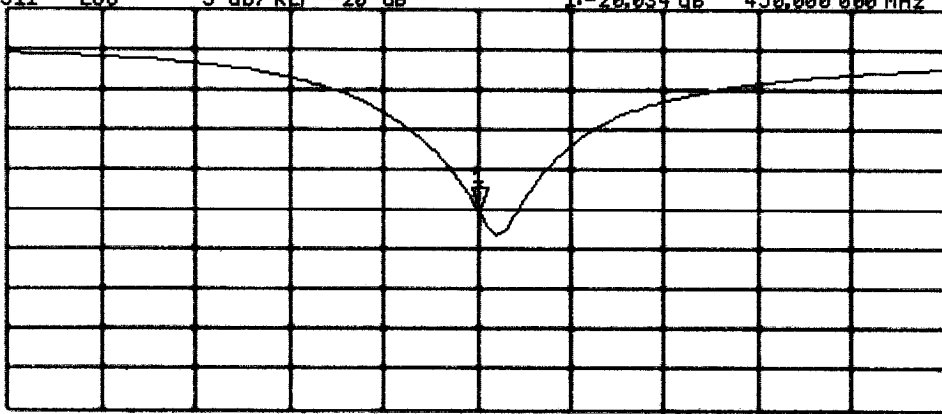↑




START 250.000 000 MHz

STOP 650.000 000 MHz

	<u>Date(s) of Evaluation</u> February 16, 2010	<u>Test Report Serial No.</u> 0215BBO-T1008-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

APPENDIX F - PROBE CALIBRATION

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO2104B	IC:	906B-2104B	
Model(s):	CXT425	DUT:	Portable GMRS/FRS PTT Radio Transceiver	462.5500 - 467.7125 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 35 of 36



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Celltech**

Certificate No: **ET3-1590_Jul09**

CALIBRATION CERTIFICATE

Object **ET3DV6 - SN:1590**

Calibration procedure(s) **QA CAL-01.v6, QA CAL-12.v5, QA CAL-23.v3 and QA CAL-25.v2
Calibration procedure for dosimetric E-field probes**

Calibration date: **July 16, 2009**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-09 (No. 217-01030)	Apr-10
Power sensor E4412A	MY41495277	1-Apr-09 (No. 217-01030)	Apr-10
Power sensor E4412A	MY41498087	1-Apr-09 (No. 217-01030)	Apr-10
Reference 3 dB Attenuator	SN: S5054 (3c)	31-Mar-09 (No. 217-01026)	Mar-10
Reference 20 dB Attenuator	SN: S5086 (20b)	31-Mar-09 (No. 217-01028)	Mar-10
Reference 30 dB Attenuator	SN: S5129 (30b)	31-Mar-09 (No. 217-01027)	Mar-10
Reference Probe ES3DV2	SN: 3013	2-Jan-09 (No. ES3-3013_Jan09)	Jan-10
DAE4	SN: 660	9-Sep-08 (No. DAE4-660_Sep08)	Sep-09

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-08)	In house check: Oct-09

Calibrated by:	Name	Function	Signature
	Marcel Fehr	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: July 16, 2009

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E²-field uncertainty inside TSL (see below *ConvF*).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe ET3DV6

SN:1590

Manufactured:	March 19, 2001
Last calibrated:	July 21, 2008
Recalibrated:	July 16, 2009

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

DASY - Parameters of Probe: ET3DV6 SN:1590**Sensitivity in Free Space^A**

NormX	1.83 ± 10.1%	$\mu V/(V/m)^2$
NormY	2.02 ± 10.1%	$\mu V/(V/m)^2$
NormZ	1.73 ± 10.1%	$\mu V/(V/m)^2$

Diode Compression^B

DCP X	90 mV
DCP Y	95 mV
DCP Z	85 mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

Boundary Effect

TSL 835 MHz Typical SAR gradient: 5 % per mm

Sensor Center to Phantom Surface Distance		3.7 mm	4.7 mm
SAR _{be} [%]	Without Correction Algorithm	9.9	6.3
SAR _{be} [%]	With Correction Algorithm	0.9	0.6

Sensor Offset

Probe Tip to Sensor Center **2.7 mm**


The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Page 8).

^B Numerical linearization parameter: uncertainty not required.




Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

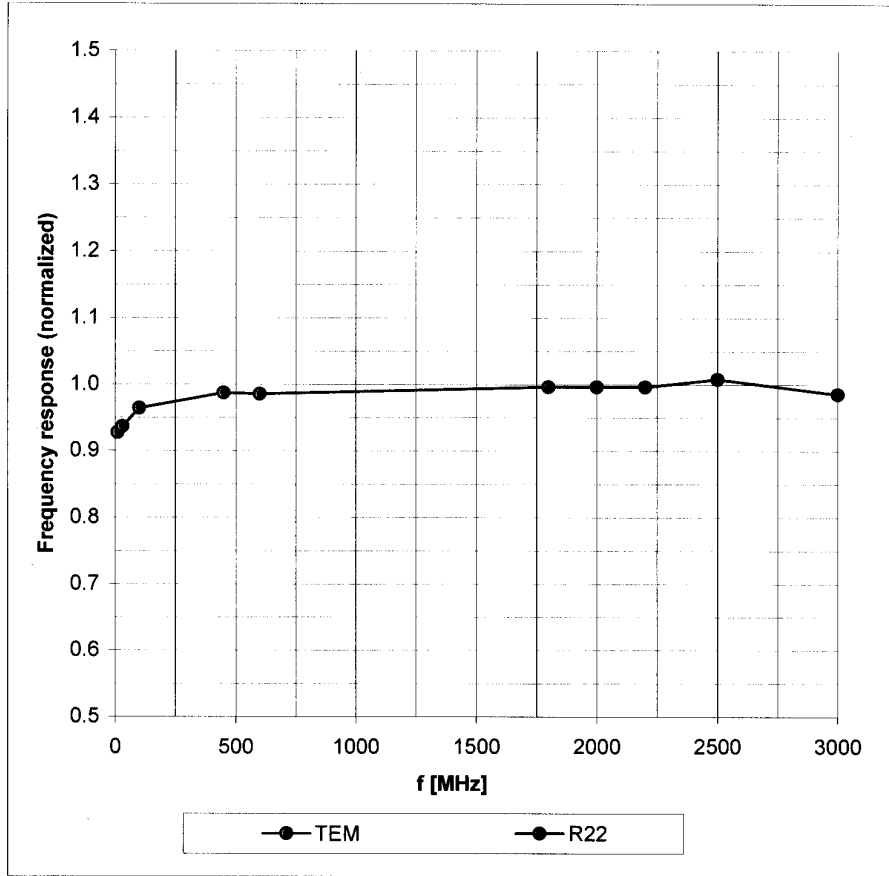



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

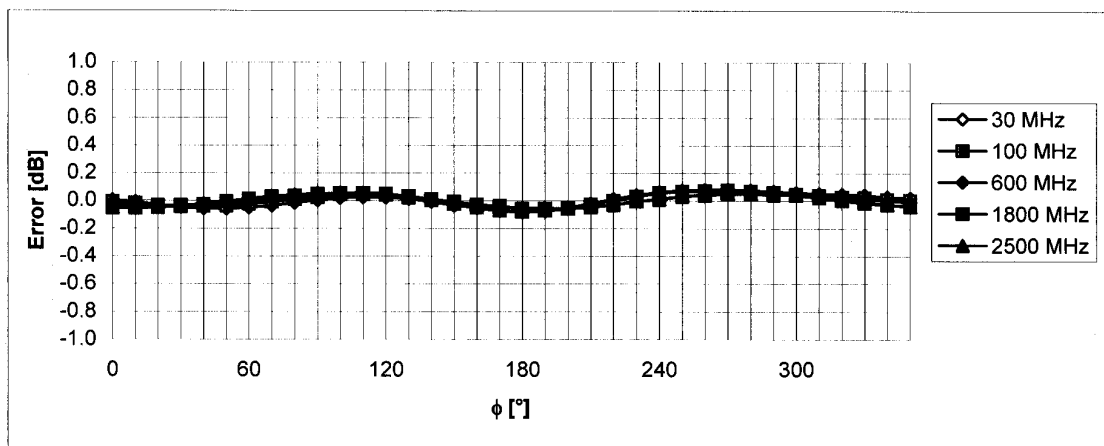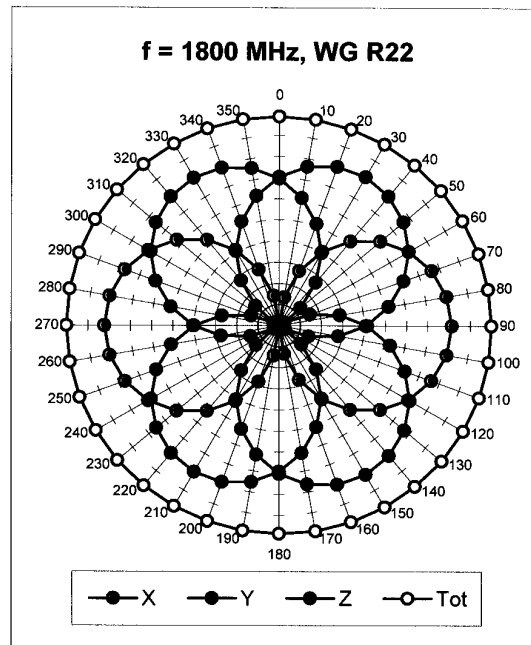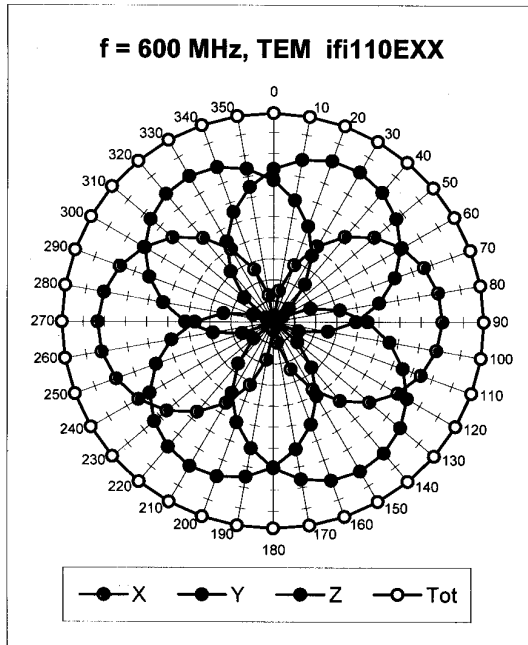



Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range $f(\text{SAR}_{\text{head}})$ (Waveguide R22, $f = 1800 \text{ MHz}$)

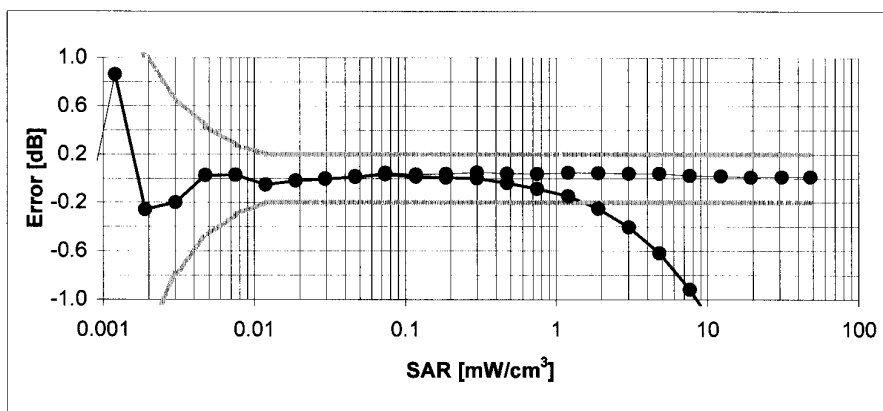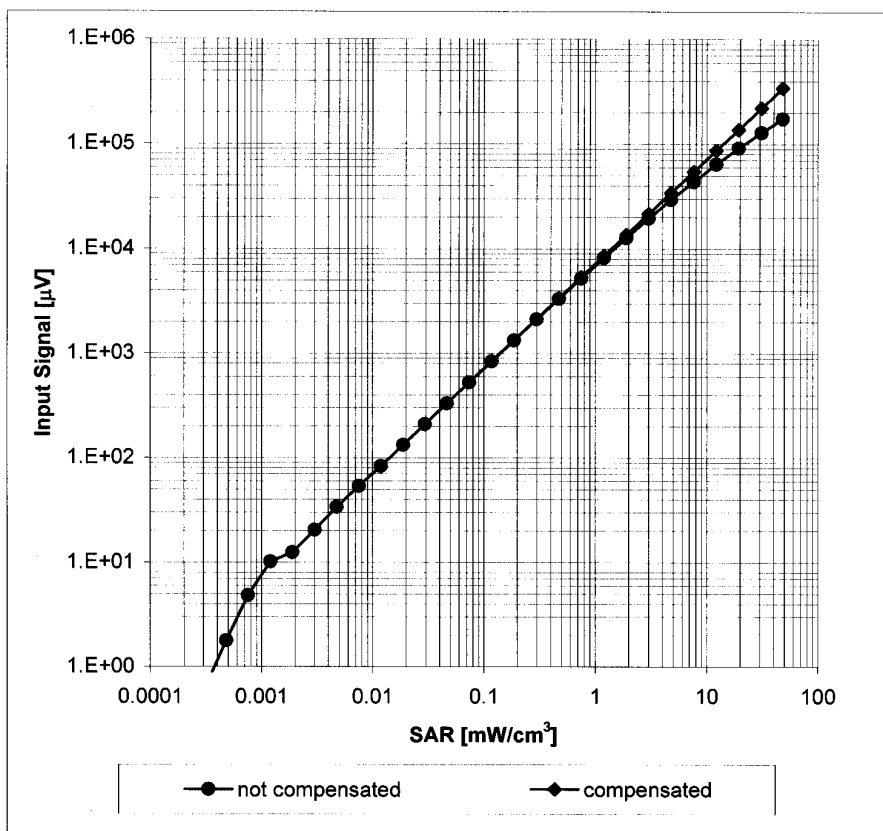

Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

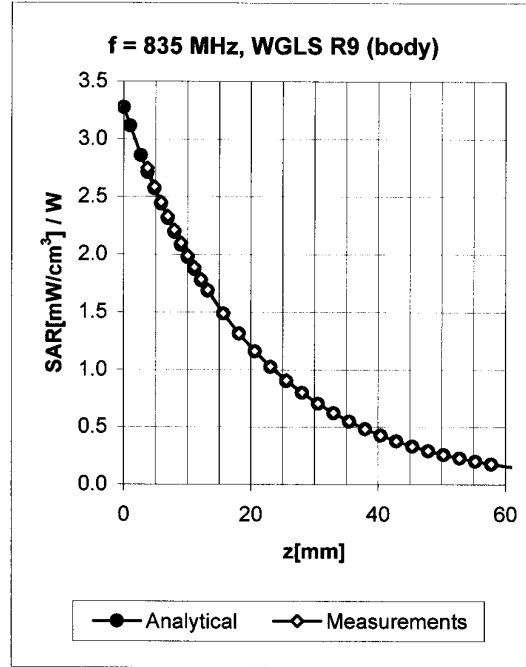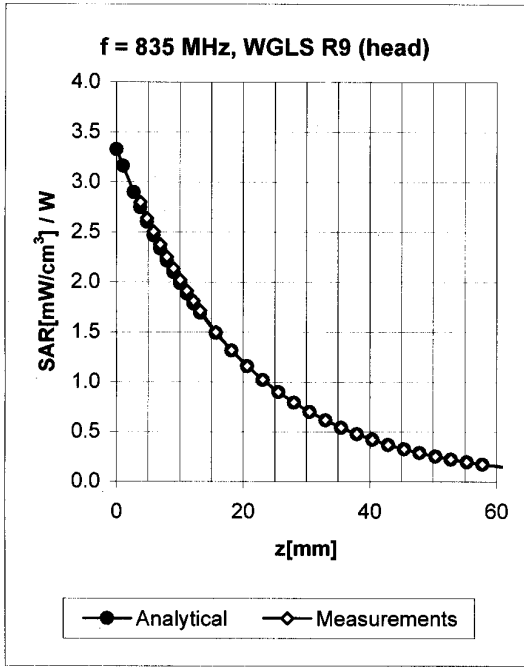


f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
450	± 50 / ± 100	Head	43.5 ± 5%	0.87 ± 5%	0.29	1.90	7.34 ± 13.3% (k=2)
835	± 50 / ± 100	Head	41.5 ± 5%	0.90 ± 5%	0.37	2.32	6.59 ± 11.0% (k=2)
450	± 50 / ± 100	Body	56.7 ± 5%	0.94 ± 5%	0.22	1.91	7.34 ± 13.3% (k=2)
835	± 50 / ± 100	Body	55.2 ± 5%	0.97 ± 5%	0.30	2.77	6.34 ± 11.0% (k=2)



^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

Deviation from Isotropy in HSL

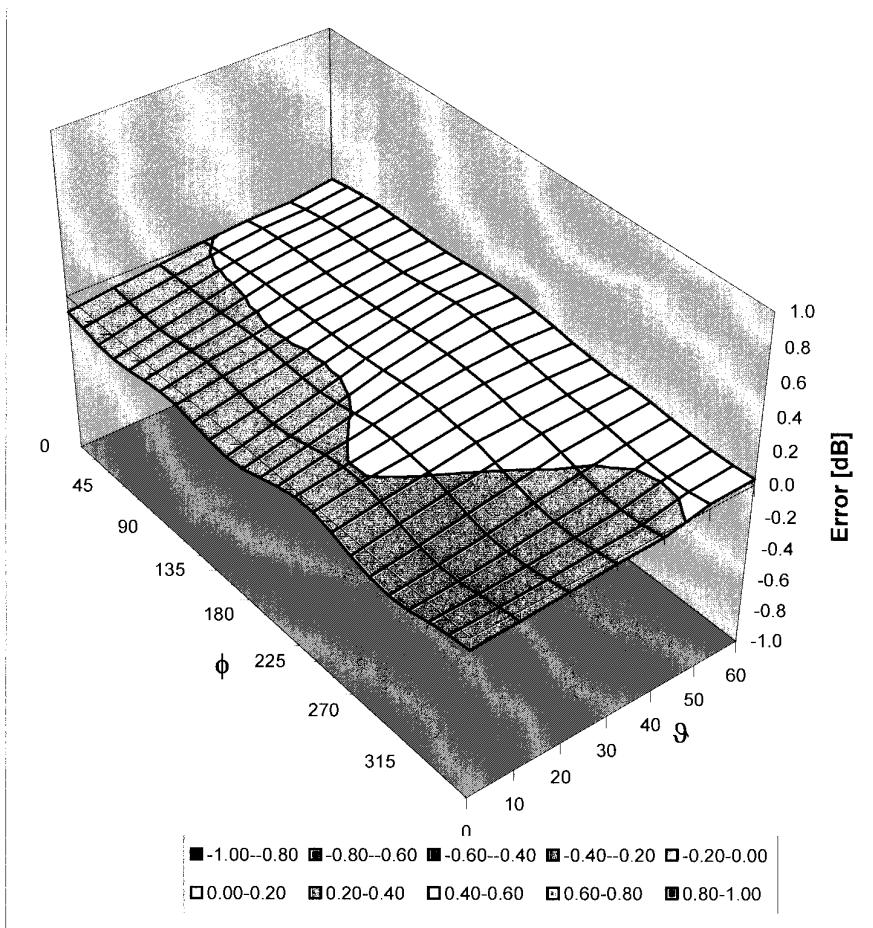
Error (ϕ , ϑ), $f = 900$ MHz



Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

	<u>Date(s) of Evaluation</u> February 16, 2010	<u>Test Report Serial No.</u> 0215BBO-T1008-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

APPENDIX G - PLANAR PHANTOM CERTIFICATE OF CONFORMITY

Applicant:	Cobra Electronics Corporation	FCC ID:	BBO2104B	IC:	906B-2104B	
Model(s):	CXT425	DUT:	Portable GMRS/FRS PTT Radio Transceiver	462.5500 - 467.7125 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 36 of 36

2378 Westlake Road
Kelowna, B.C. Canada
V1Z-2V2



Ph. # 250-769-6848
Fax # 250-769-6334
E-mail: barskiind@shaw.ca
Web: www.bcfiberglass.com

FIBERGLASS FABRICATORS

Certificate of Conformity

Item : Flat Planar Phantom Unit # 03-01
Date: June 16, 2003
Manufacturer: Barski Industries (1985 Ltd)

Test	Requirement	Details
Shape	Compliance to geometry according to drawing	Supplied CAD drawing
Material Thickness	Compliant with the requirements	2mm +/- 0.2mm in measurement area
Material Parameters	Dielectric parameters for required frequencies Based on Dow Chemical technical data	100 MHz-5 GHz Relative permittivity < 5 Loss Tangent < 0.05

Conformity

Based on the above information, we certify this product to be compliant to the requirements specified.

Signature: _____

A handwritten signature in black ink, appearing to read 'Daniel Chailier', is written over a horizontal line.

Daniel Chailier



Fiberglass Planar Phantom - Top View



Fiberglass Planar Phantom - Front View




Fiberglass Planar Phantom - Back View



Fiberglass Planar Phantom - Bottom View

Dimensions of Fiberglass Planar Phantom (Manufactured by Barski Industries Ltd. - Unit# 03-01)

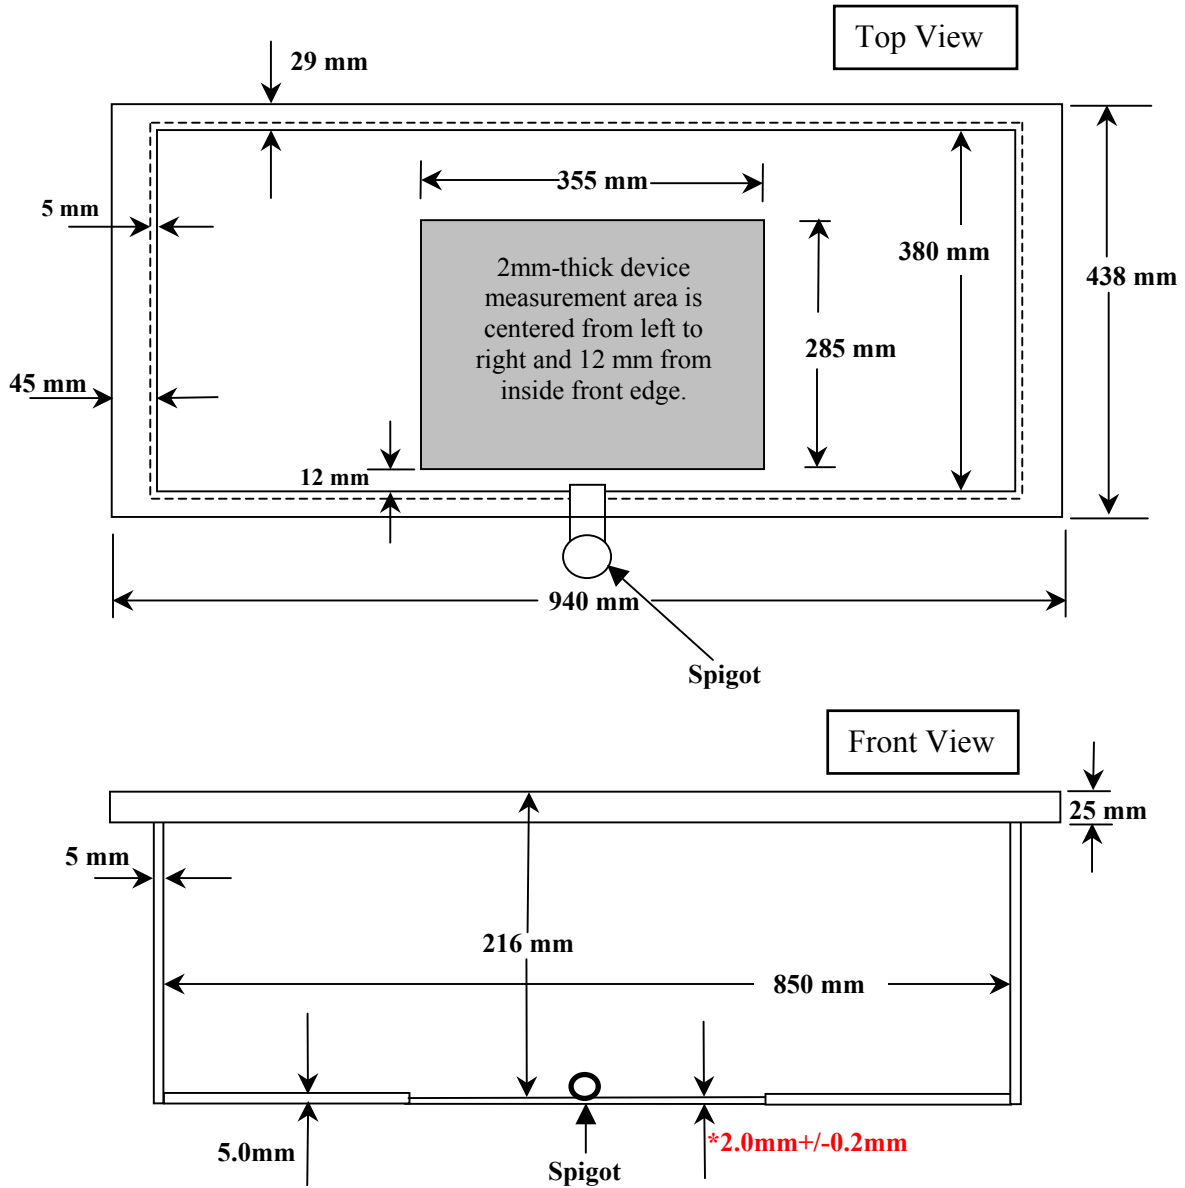

**Note: Measurements that aren't repeated for the opposite sides are the same as the side measured.
This drawing is not to scale.**