

10. MAXIMUMN TRANSMITTER POWER

10.1 PROVISIONS APPLICABLE

FCC Part 95.967, FCC Part2.1046(a)

Each CBRS transmitter type must be designed such that the transmitter power can not exceed the following limits:

(a) When transmitting amplitude modulated (AM) voice signals or frequency modulated (FM) voice signals, the mean carrier power must not exceed 4 Watts

(b) When transmitting single sideband (SSB) voice signals, the peak envelope power must not exceed 12 Watts.


10.2 MEASUREMENT METHOD

Conducted RF Output Power:

- 1. The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.
- 2. The DUT was connected to a Spectrum Analyzer (SA) via a 30dB attenuator connected to the DUT's antenna port. The SA was configured as above using the Automatic 6dB Cursor Bandwidth measurement. The output power of the DUT was set to the manufacturer's highest output power setting at the Low, Mid and High frequency channels as permitted by the device. The DUT was set to transmit at its maximum Duty Cycle.
- 3. Spectrum set as follow:

Centre frequency = fundamental frequency, Span=50kHz, RBW=300Hz, VBW=3KHz ;

Sweep = auto, Detector function = peak, Trace = max hold

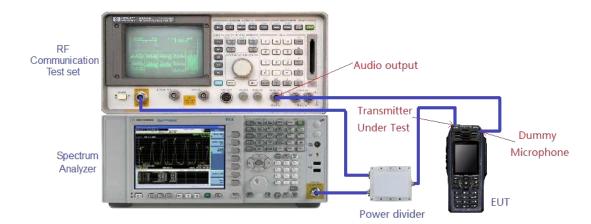

10.3 MEASUREMENT SETUP

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd


 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com
 Web: http://www.agccert.com/



10.4 MEASUREMENT RESULTS

Conducted Power Measurement Results			
Mode	Channel Separation	Test Channel	Measurement Result (dBm)
		26.965 MHz	35.69
CBRS TX	10 kHz	27.205 MHz	35.55
		27.405 MHz	35.18

Test plot as follows:

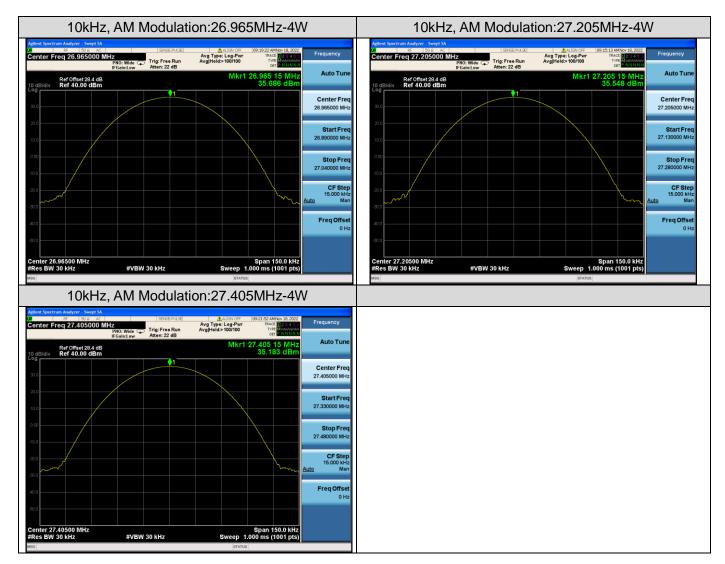



Conducted Power Measurement Results			
Mode	Channel Separation	Test Channel	Measurement Result (dBm)
		26.965 MHz	35.94
CBRS TX	10 kHz	27.205 MHz	35.85
		27.405 MHz	35.89

Test plot as follows:

10kHz, FM Modulati	on:26.965MHz-4W	10kHz, FM Modulation:27.205MHz-4W
Agilent Spectrum Analyzer - Swept SA SPEEPULSE Center Freq 26.955000 MHz Froi Wide to Froi Pro: Wid	Avg Type: Leg-Pwr TRACE B 20 4 4 7 Avg Type: Leg-Pwr TRACE B 20 4 4 7 Avg Hold>100/100 type:	Agtient Spectrum Analyzer - Swept SA SPEEPIUSE ALINI OFF (0216/341M Sop 19, 2022) Center Freq 27.205000 MHz Trig: Free Run Avg Type: Leg-Swr Nixclin Dis a sin Frequency Trig: Free Run Avg Type: Leg-Swr Sixclin Dis a sin Frequency
Ref Offset 28.4 dB 0 dB/dlv Ref 40.00 dBm 00 00 00 </td <td>Mkr1 26.965 00 MHz 35,938 dBm 26.96500 MHz 26.96000 MHz 26.99000 MHz 26.99000 MHz 26.99000 MHz 27.04000 MHz 27.04000 MHz 26.99000 MHz 26.9900 MHZ 26.99000 MHZ 26.9900 M</td> <td>Ref Offset28.4 B Mint 12/20010 Mint 100 Binly 35.846 dBm 200 0 35.846 dBm 21,0000 MH 35.846 dBm 21,000 MHz \$Span 150.0 kHz \$Stop Freq Offset200 MHz \$Span 150.00 kHz #Res EW 30 kHz \$Sweep 1.000 ms (1001 pts)</td>	Mkr1 26.965 00 MHz 35,938 dBm 26.96500 MHz 26.96000 MHz 26.99000 MHz 26.99000 MHz 26.99000 MHz 27.04000 MHz 27.04000 MHz 26.99000 MHz 26.9900 MHZ 26.99000 MHZ 26.9900 M	Ref Offset28.4 B Mint 12/20010 Mint 100 Binly 35.846 dBm 200 0 35.846 dBm 21,0000 MH 35.846 dBm 21,000 MHz \$Span 150.0 kHz \$Stop Freq Offset200 MHz \$Span 150.00 kHz #Res EW 30 kHz \$Sweep 1.000 ms (1001 pts)
10kHz, FM Modulati	on:27.405MHz-4W	MIG (STATUS)
Astimit Spectrum Andrzer, Swigt SA D L B 20 Solo Salo Salo Salo Salo Salo Salo Salo	▲ ALEX OFF 02518-52PM Sep 19.2022 Avg Type: Log-Pwr THACE 0.2 Sec 19.2022 Avg Hold>100100 cr 17.00 Mkr1 27.405 45 MHz	e
Ref Office 128 4 dB 10 dBidling 1 30 0 1 40 0 1 40 0 1 40 0 1 40 0 1 40 0 1 40 0 1	Start Freq Center Freq 27.45600 MHz Start Freq 27.45000 MHz Start Freq 27.480000 MHz Storp Freq 27.480000 MHz Storp Freq 27.480000 MHz Storp Freq 27.480000 MHz Man Freq Offset 0 Hz	
Center 27.40500 MHz	Span 150.0 kHz	



11.MODULATION CHARACTERISTICS

11.1 PROVISIONS APPLICABLE

FCC Part 95.975, FCC Part 2.1047(b)

Each CBRS transmitter type must be designed such that the modulation characteristics are in compliance with the rules in this section.

- a) When emission type A3E is transmitted with voice modulation, the modulation percentage must be at least 85%, but not more than 100%.
- b) When emission type A3E is transmitted by a CBRS transmitter having a transmitter output power of more than 2.5 W, the transmitter must contain a circuit that automatically prevents the modulation percentage from exceeding 100%.
- c) When emission type F3E is transmitted the peak frequency deviation shall not exceed ±2 kHz.

11.2 MEASUREMENT METHOD_(AM)

(A) Audio frequency response

Connect the equipment as illustrated.

Adjust to deliver 50% modulation at the audio frequency that produces the maximum modulation level

Record the modulation input level (mV) and use this level as 0dB for plotting modulation limiting.

Vary the modulating frequency from 100Hz to 10000Hz and record the input levels necessary to maintain a constant 50% modulation.

Graph the audio level in dB relative to the 0dB reference level as a function of the modulating frequency. Record audio frequency where it is impossible to perform the measurement.

(B) Modulation limiting

Connect the equipment as illustrated.

Adjust to deliver 50% modulation at the audio frequency that produces the maximum modulation level Record the modulation input level (mV) and use this level as 0dB for plotting modulation limiting. Increment the audio signal level to 40dB above the reference level. Record the modulation level (%).

Repeat the measurements using a 400Hz and a 2500Hz sinusoidal audio signal, record the modulation level (%), perform for both positive and negative modulation.

11.3 MEASUREMENT METHOD_(FM)

(C) Modulation limiting

- (1). Configure the EUT as shown in figure 1, adjust the audio input for 60% of rated system deviation at 1kHz using this level as a reference (0dB) and vary the input level from –20 to +20dB. Record the frequency deviation obtained as a function of the input level.
- (2). Repeat step 1 with input frequency changing to 300, 1000, 1500 and 3000Hz in sequence.

(D) Audio frequency response

- (1). Configure the EUT as shown in figure 1.
- (2). Adjust the audio input for 20% of rated system deviation at 1 kHz using this level as a reference (0 dB).
- (3). Vary the Audio frequency from 100 Hz to 10 kHz and record the frequency deviation.
- (4). Audio Frequency Response = 20log10 (Deviation of test frequency/Deviation of 1 kHz reference).

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd



11.4 MEASUREMENT SETUP






11.5 MEASUREMENT RESULTS

(A). MODULATION LIMIT:

10kHz, AM modulation, Assigned Frequency:27.405MHz-4W				
Modulation Level (mV)	Peak Freq. Deviation At 300 Hz (%)	Peak Freq. Deviation At 600 Hz (%)	Peak Freq. Deviation At 1000 Hz (%)	Peak Freq. Deviation At 2500 Hz (%)
1	14	22	24	25
10	26	60	61	61
100	28	77	63	69
300	34	79	69	72
500	35	82	75	77
700	36	85	81	82
800	51	88	85	85
900	56	89	86	89
1000	55	88	87	87

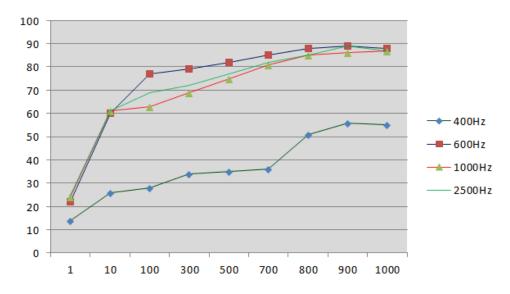

Note:

1. All the modes had been tested, but only the worst data recorded in the report


2. The equipment circuit comes with circuit control that automatically prevents the modulation limit from exceed ing 100%.



(B). AUDIO FREQUENCY RESPONSE:

10kHz, AM modulation, Assigned Frequency:27.405MHz-4W			
Frequency (Hz)	modulation level (mV)	Deviation (kHz)	Audio Frequency Response(dB)
100			
200			
300	20.11	0.07	-19.88
400	13.41	0.09	-17.69
500	12.56	0.16	-12.69
600	9.00	0.24	-9.17
700	8.42	0.39	-4.96
800	7.69	0.49	-2.97
900	6.22	0.71	0.25
1000	6.10	0.69	0.00
1200	6.56	0.74	0.61
1400	6.43	0.75	0.72
1600	5.28	0.82	1.50
1800	5.37	0.84	1.71
2000	5.62	0.88	2.11
2400	5.58	0.89	2.21
2500	5.61	0.78	1.06
2800	5.74	0.63	-0.79
3000	6.65	0.52	-2.46
3200	7.37	0.31	-6.95
3600	8.42	0.19	-11.20
3800	9.41	0.09	-17.69
4000	10.08	0.06	-21.21
4200	11.43	0.04	-25.34
4800	14.26	0.03	-27.96
5200	19.03	0.02	-32.26
6000			

Audio Frequency Response@50%MI

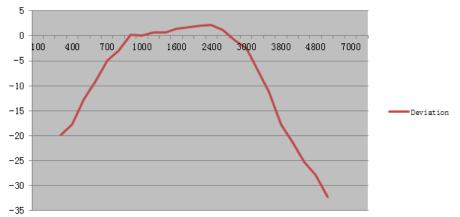


10 KHz Channel Separations

Note:1.All the modes had been tested, but only the worst data recorded in the report. 2. 50% MI Could not be achieved above 5200 Hz.



(C). MODULATION LIMIT:

10kHz, FM modulation, Assigned Frequency:27.405MHz-4W				
Modulation Level (dB)	Peak Freq. Deviation At 300 Hz (kHz)	Peak Freq. Deviation At 1000 Hz (kHz)	Peak Freq. Deviation At 1500 Hz (kHz)	Peak Freq. Deviation At 3000 Hz (kHz)
-20	0.09	0.28	0.46	0.62
-15	0.28	0.52	0.78	0.98
-10	0.31	0.55	0.89	1.15
-5	0.42	0.61	0.85	1.24
0	0.53	0.76	0.96	1.33
+5	0.59	0.85	0.95	1.34
+10	0.74	0.89	1.02	1.36
+15	0.69	0.91	1.25	1.42
+20	0.61	0.88	1.19	1.41

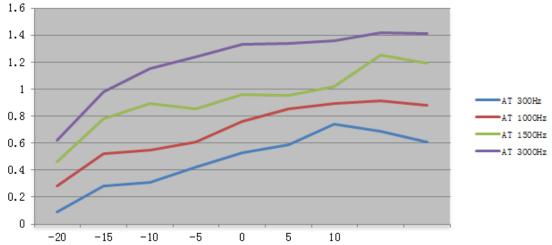


Note: All the modes had been tested, but only the worst data recorded in the report



(D). AUDIO FREQUENCY RESPONSE:

10kHz, Analog modulation, Assigned Frequency:27.405MHz-4W				
Frequency (Hz)	Deviation (kHz)	Audio Frequency Response(dB)		
100				
200				
300	0.07	-26.27		
400	0.26	-14.87		
500	0.33	-12.80		
600	0.52	-8.85		
700	0.69	-6.39		
800	1.01	-3.08		
900	1.36	-0.50		
1000	1.44	0.00		
1200	1.78	1.84		
1400	2.11	3.32		
1600	2.25	3.88		
1800	2.26	3.91		
2000	2.32	4.14		
2400	2.49	4.76		
2500	2.45	4.62		
2800	1.74	1.64		
3000	1.45	0.06		
3200	1.42	-0.12		
3600	0.91	-3.99		
4000	0.71	-6.14		
4500	0.63	-7.18		
5000	0.44	-10.30		
5500	0.32	-13.06		
6000	0.28	-14.22		
6500	0.21	-16.72		
7000	0.13	-20.89		
7500	0.08	-25.11		

10 KHz Channel Separations

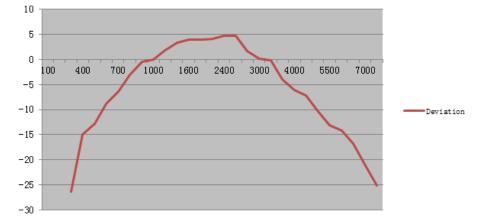

Note: All the modes had been tested, but only the worst data recorded in the report.



APPENDIX I: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC01284220902AP01

APPENDIX II: PHOTOGRAPHS OF TEST EUT

Refer to the Report No.: AGC01284220902AP02

----END OF REPORT----



Conditions of Issuance of Test Reports

 All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd. (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
 Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.