



Dashboard Mounting Option -


- 1 Attach Hook & Loop to Detector

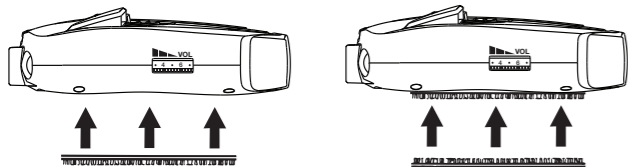

- 2 Attach Detector to Dashboard Surface

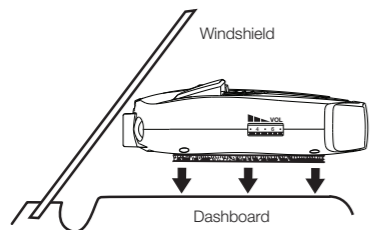

- 3 Connect Detector to 12V Power Source



Download the Cobra iRadar® App



Share and receive red light, speed camera and live enforcement alerts from the iRadar driving community.



- A Connecting your Detector to your Smartphone via Bluetooth®

- 1 Power on RAD 480i - Make sure the unit is connected to your car's 12V port.

Note: the first time RAD 480i is powered on, you will be prompted to select your time zone and daylight saving time

- 2 Install and run the Cobra iRadar app on your smartphone


Note: the first time you run the app, you will be prompted to register a new account

- 3 In the iRadar app, press the Menu button then select "Devices"

- 4 Select "RAD 480i" from the list

- 5 In the iRadar app, the RAD 480i entry will display "Connected" when it has paired. Press the "Menu" button then "Home" to return to the Map screen.

- 6 You're all set!

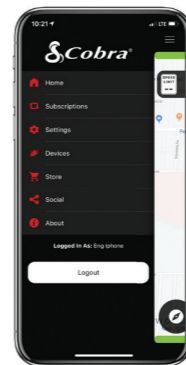

Cobra®

RAD 480i

RADAR/LASER DETECTOR



QUICK START GUIDE

RAD 480i Features

THANK YOU!
For purchasing the new
COBRA® RAD 480i

Full manual available at: www.cobra.com



FCC ID: BBOIRADD5. THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS: (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRABLE OPERATION.




NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.


FCC NOTE: Modifications not expressly approved by the manufacturer could void the user's FCC granted authority to operate the equipment.

Cobra® iRadar® and the snake design are registered trademarks of Cobra Electronics Corporation, USA.

Cobra Electronics Corporation™ is a trademark of Cobra Electronics Corporation, USA. Other trademarks and trade names are those of their respective owners.

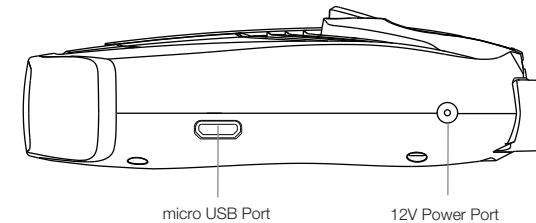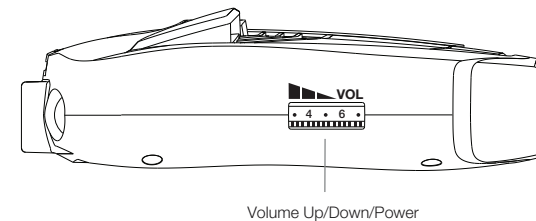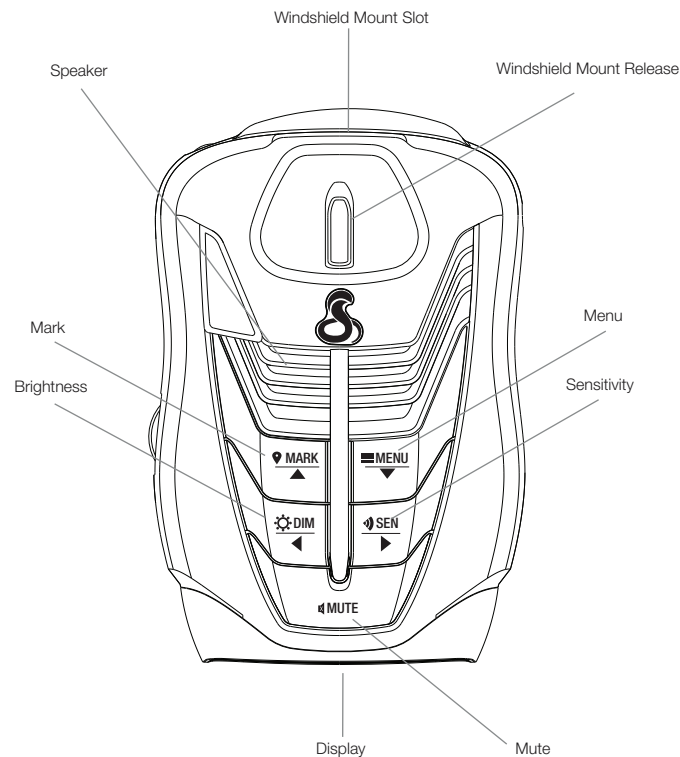


Windshield Suction Cup Bracket



12V Power Cord

Windshield Mounting Option -


- 1 Assemble Suction Cup Bracket




- 2 Adjust Suction Cup Bracket to ensure your RAD 480i has a level view of the road



- 3 Attach Suction Cup Bracket to Windshield



- 4 Attach RAD 480i to Suction Cup Bracket

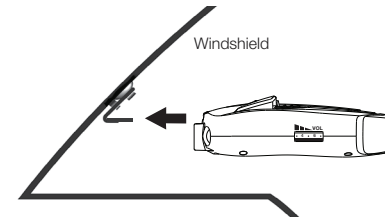

- 5 Connect Detector to 12V Power Source

