

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)

## Test Report

Product Name: FRS/GMRS TRANSCEIVER

FCC ID: BBOLI6500

Applicant:

COBRA ELECTRONICS CORPORATION  
6500 WEST CORTLAND STREET  
CHICAGO IL 60707  
USA

**Date Receipt:** 10/9/2006

**Date Tested:** 12/12/2006

APPLICANT: COBRA ELECTRONICS CORPORATION  
FCC ID: BBOLI6500  
REPORT #: C\COBRA\2833AUT6\2833AUT6TestReport.doc

COVER SHEET

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

## TABLE OF CONTENTS LIST

### TEST REPORT:

PAGE 1.....	GENERAL INFORMATION & TECHNICAL DESCRIPTION
PAGE 2.....	TECHNICAL DESCRIPTION CONTINUED RF POWER OUTPUT
PAGE 3.....	MODULATION CHARACTERISTICS AUDIO FREQUENCY RESPONSE GRAPH
PAGE 4.....	MODULATION LIMITING GRAPH
PAGE 5.....	AUDIO LOW PASS FILTER GRAPH
PAGE 6.....	OCCUPIED BANDWIDTH
PAGE 7.....	OCCUPIED BANDWIDTH PLOT
PAGE 8.....	SPURIOUS EMISSIONS AT ANTENNA TERMINALS
PAGE 9.....	UNWANTED RADIATION - GMRS
PAGE 10.....	UNWANTED RADIATION - FRS
PAGE 11.....	METHOD OF MEASURING RADIATED SPURIOUS EMISSIONS
PAGE 12.....	FREQUENCY STABILITY
PAGE 13.....	LIST OF TEST EQUIPMENT

### EXHIBITS INCLUDED:

CONFIDENTIALITY LETTER  
BLOCK DIAGRAM  
SCHEMATICS  
PARTS LIST  
USERS MANUAL  
LABEL SAMPLE  
LABEL LOCATION  
EXTERNAL PHOTOGRAPHS  
INTERNAL PHOTOGRAPHS  
ALIGNMENT PROCEDURE  
OPERATIONAL DESCRIPTION  
TEST SET UP PHOTOGRAPHS

APPLICANT: COBRA ELECTRONICS CORPORATION  
FCC ID: BBOLI6500  
REPORT #: C\COBRA\2833AUT6\2833AUT6TestReport.doc

TABLE OF CONTENTS

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

## GENERAL INFORMATION REQUIRED FOR CERTIFICATION

2.1033(c)(1)(2) COBRA ELECTRONICS CORPORATION will manufacture the  
FCCID: BBOLI6500  
GMRS/FRS COMBINATION TRANSCEIVER in quantity,  
for use under FCC RULES PART 95.

COBRA ELECTRONICS CORPORATION  
6500 WEST CORTLAND STREET  
CHICAGO IL 60707 USA

2.1033 (c) TECHNICAL DESCRIPTION

2.1033(c)(3) Instruction book. A draft copy of the instruction  
manual is included is included in the exhibits.

2.1033(c) (4) Type of Emission: 9K7F3E  
95.631

Bn = 2M + 2DK  
M = 2500  
D = 2.35K  
Bn = 2(2500)+2(2350) = 9.7K

GMRS Authorized Bandwidth 20.0 kHz

2.1033(c)(5) GMRS Frequency Range:	1. 462.5500	13. 462.7000
95.621	2. 462.5625	14. 462.7125
	3. 462.5750	15. 462.7250
	4. 462.5875	16. 467.5500
	5. 462.6000	17. 467.5750
	6. 462.6125	18. 467.6000
	7. 462.6250	19. 467.6250
	8. 462.6375	20. 467.6500
	9. 462.6500	21. 467.6750
	10. 462.6625	22. 467.7000
	11. 462.6750	23. 467.7250
	12. 462.6875	

FRS Authorized Bandwidth 12.5 kHz

2.1033(c)(5) FRS Frequency Range:	1. 462.5625	8. 467.5625
95.627	2. 462.5875	9. 467.5875
	3. 462.6125	10. 467.6125
	4. 462.6375	11. 467.6375
	5. 462.6625	12. 467.6625
	6. 462.6875	13. 467.6875
	7. 462.7125	14. 467.7125 MHz

APPLICANT: COBRA ELECTRONICS CORPORATION  
FCC ID: BBOLI6500  
REPORT #: C\COBRA\2833AUT6\2833AUT6TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

- 2.1033(c)(6)(7) Power Output shall not exceed 0.50 Watts effective radiated power. There can be no provisions for increasing the power or varying the power.  
95.639  
95.649
- 2.1033(c)(8) DC Voltages and Current into Final Amplifier:  
FINAL AMPLIFIER ONLY
- FOR LOW POWER SETTING INPUT POWER: (7.4V)(.130A) = 0.96 Watts  
FOR MEDIUM POWER SETTING INPUT POWER:(7.4V)(.180A) = 1.33 Watts  
FOR HIGH POWER SETTING INPUT POWER: (7.4V)(.240A) = 1.77 Watts
- 2.1033(c)(9) Tune-up procedure. The tune-up procedure is included in the exhibits.
- 2.1033(c)(10) Complete Circuit Diagrams: The circuit diagram and block diagram are included in the exhibits.
- 2.1033(c)(11) A photograph or a drawing of the equipment identification label is included in the exhibits.
- 2.1033(c)(12) Photographs(8"X10") of the equipment of sufficient clarity to reveal equipment construction and layout, including meters, labels for controls, including any view under shields.
- 2.1033(c)(13) Digital modulation is not allowed.
- 2.1033(c)(14) The data required by 2.1046 through 2.1057 is submitted below.
- 2.10311c)(6)(7) RF power is measured by the substitution method as outlined in TIA/EIA - 603. With a nominal battery voltage of 7.4 V, and the transmitter properly adjusted the RF output measures:  
2.1046(a)
- GMRS - 1.00 Watt ERP  
FRS - .50 Watt ERP

APPLICANT: COBRA ELECTRONICS CORPORATION

FCC ID: BBOLI6500

REPORT #: C\COBRA\2833AUT6\2833AUT6TestReport.doc

# TIMCO ENGINEERING INC.


849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

2.1047(a)(b) Modulation characteristics:

## AUDIO FREQUENCY RESPONSE

The audio frequency response was measured in accordance with TIA/EIA Specification 603. The audio frequency response curve is shown on the next page. The audio signal was fed into a dummy microphone circuit and into the microphone connector. The input required to produce 30 percent modulation level was measured. See plot below.

### Audio Frequency Response Plot

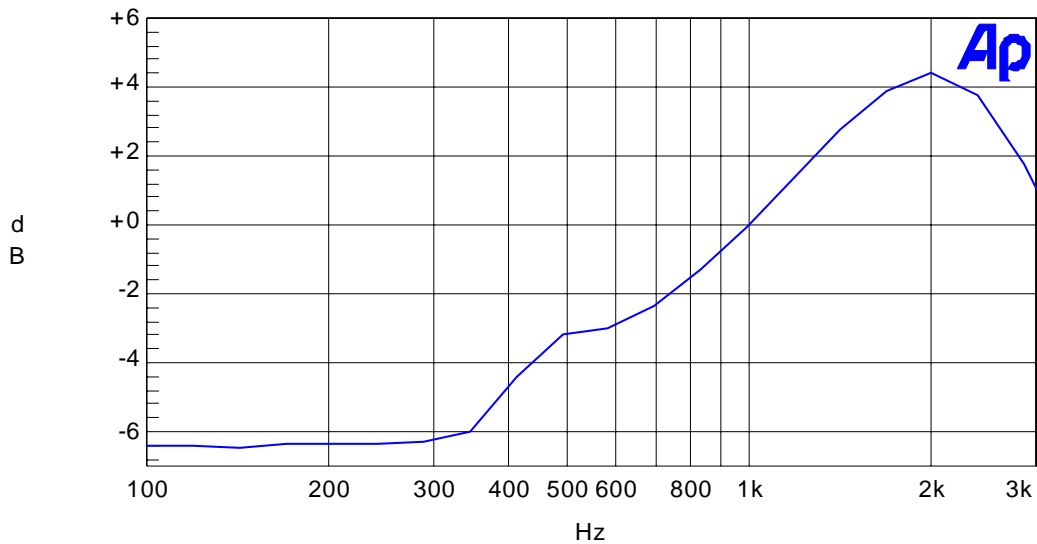

Color	Line Style	Thick	Data	Axis
Blue	Solid	1	Anlr.Level A!Normalize	Left

MaxFreq.at1


# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

2.1047(b) Audio input versus modulation  
The audio input level needed for a particular percentage of modulation was measured in accordance with TIA/EIA Specification 603. The audio input curves versus modulation are on the following pages. Curves are provided for audio input frequencies of 300, 1000, and 2500 Hz. See the plot below.

## MODULATION LIMITING GRAPH

Modulation Limiting Plots:  
2.5 KHz (Green), 1.0 KHz (Blue), and 300 Hz (Yellow)

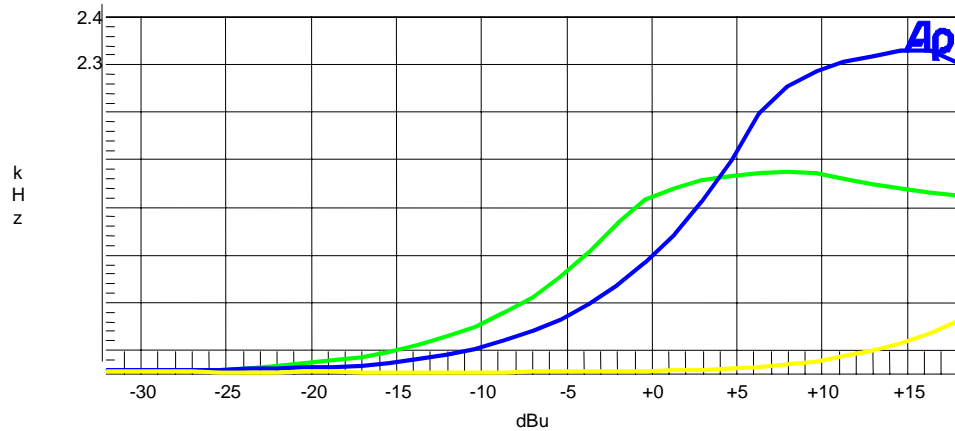

# TIMCO ENGINEERING INC.

849 NW State Road 45


Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

95.637 Post Limiter Filter Each GMRs transmitter, except a mobile station transmitter with a power of 2.5Watts or less, must be equipped with an audio low pass filter. At any frequency between 3 & 20 kHz the filter must have an attenuation of  $60\log(f/3)$  greater than the attenuation at 1kHz. See below.

## Audio Low Pass Filter

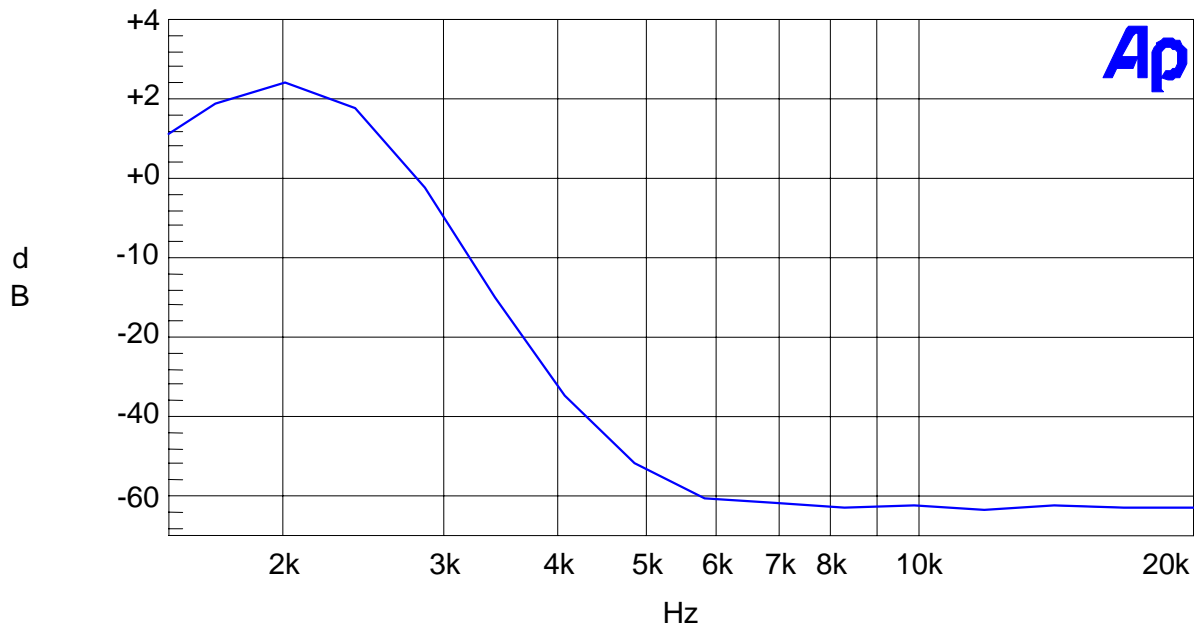

APPLICANT: COBRA ELECTRONICS CORPORATION

FCC ID: BBOLI6500

REPORT #: C\COBRA\2833AUT6\2833AUT6TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669


<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

2.1049 Occupied bandwidth:  
95.635(b)(1)(3)(7)

At least 25dB on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth. At least 35 dB on any frequency removed from the center of the authorized BW by more than 100% up to and including 250% of the authorized BW. At least  $43 + \log_{10}(TP)$  dB on any frequency removed from the center of the authorized bandwidth by more than 250%. See the following plot.

Occupied BW Test Equipment Setup

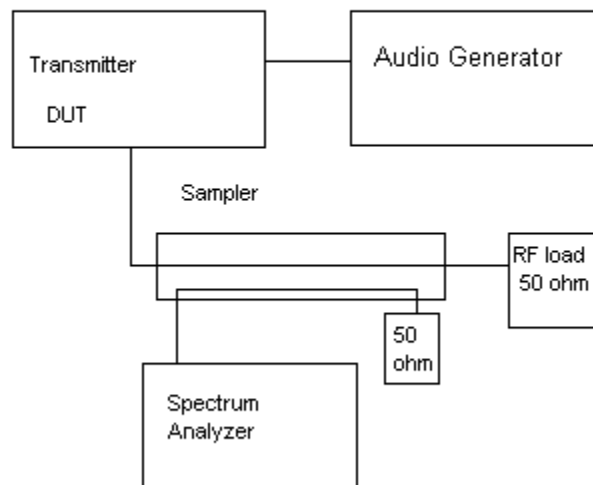

APPLICANT: COBRA ELECTRONICS CORPORATION

FCC ID: BBOLI6500

REPORT #: C\COBRA\2833AUT6\2833AUT6TestReport.doc



# TIMCO ENGINEERING INC.


849 NW State Road 45  
 Newberry, Florida 32669  
 http://www.timcoengr.com  
 888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

## OCCUPIED BANDWIDTH PLOT

### NOTES:

COBRA ELECTRONICS CORPORATION - FCC ID: BBOL16500  
 OCCUPIED BANDWIDTH PLOT

### FCC 95.635 Mask (1) (3) (7)

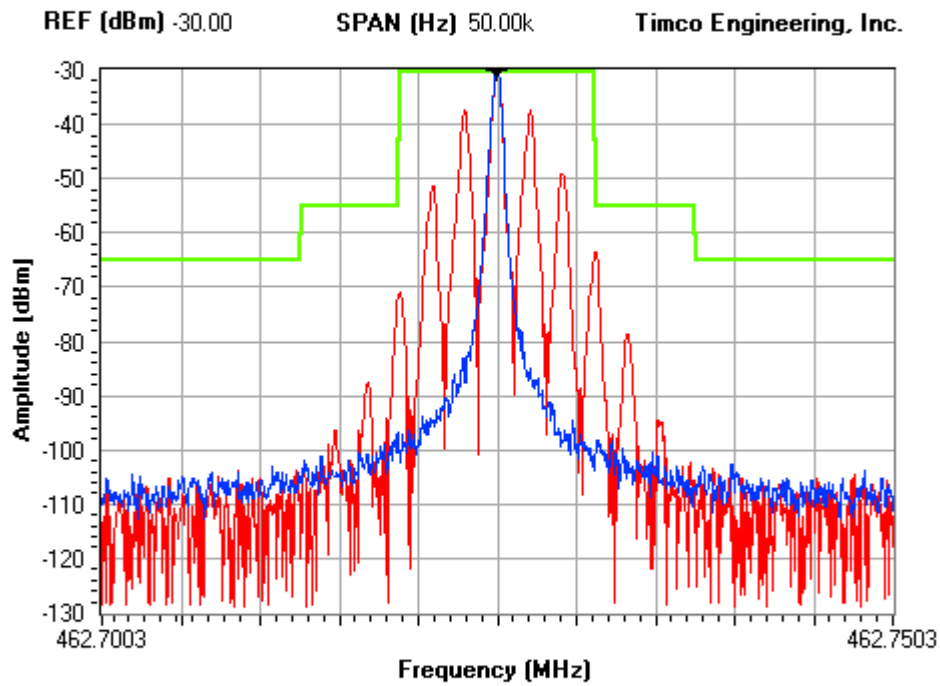

**RBW**      **VBW**      **ST (sec)**  
 300 Hz      100 kHz      1

**Center Frequency (Hz)** 462.725M

**Marker Delta (Hz)** 0.00

Peak	462.725	-30.00	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
MKR2	0.000	0.00	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
MKR3	0.000	0.00	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
HWMK	23.076	6.27	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

APPLICANT: COBRA ELECTRONICS CORPORATION  
 FCC ID: BBOL16500  
 REPORT #: C\COBRA\2833AUT6\2833AUT6TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)


2.1051 Spurious emissions at antenna terminals(conducted):  
The following data shows the level of conducted spurious responses at the antenna terminal. The test procedure used was TIA/EIA 603 S2.2.13 with the exception that the emissions were recorded in dBc. The spectrum was scanned from 0.4 to at least the 10th harmonic of the fundamental.

NAME OF TEST: SPURIOUS EMISSIONS AT ANTENNA TERMINALS

2.1051 Not Applicable, no antenna terminal allowed.

## Method of Measuring Conducted Spurious Emissions

Spurious Emissions at  
Antenna Terminals

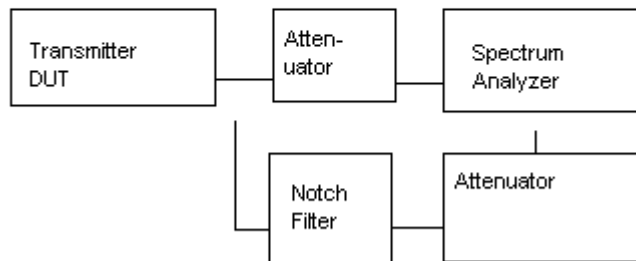

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

2.1053  
95.635(b)(7)

## UNWANTED RADIATION:

The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 MHz to at least the 10th harmonic of the fundamental. This test was conducted per ANSI C63.4-2003.

REQUIREMENTS: GMRS:  $43 + 10\log(1.00) = 43$  dB

## TEST DATA (GMRS):

<b>Emission Frequency MHz</b>	<b>Ant. Polarity</b>	<b>dB Below Carrier (dBc)</b>
<b>462.73</b>	<b>V</b>	<b>0.00</b>
<b>925.45</b>	<b>H</b>	<b>56.65</b>
<b>1388.18</b>	<b>V</b>	<b>94.80</b>
<b>1850.90</b>	<b>H</b>	<b>73.64</b>
<b>2313.63</b>	<b>H</b>	<b>73.30</b>
<b>2776.35</b>	<b>H</b>	<b>71.93</b>
<b>3239.08</b>	<b>V</b>	<b>64.11</b>
<b>3701.80</b>	<b>H</b>	<b>59.85</b>
<b>4164.53</b>	<b>V</b>	<b>46.54</b>
<b>4627.25</b>	<b>V</b>	<b>46.10</b>

METHOD OF MEASUREMENT: The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. This test was conducted per TIA/EIA Standard 603 using the substitution method. Measurements were made at the open field test site of TIMCO ENGINEERING, INC. located at 849 NW State Road 45, Newberry, FL 32669.

APPLICANT: COBRA ELECTRONICS CORPORATION  
FCC ID: BBOLI6500  
REPORT #: C\COBRA\2833AUT6\2833AUT6TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

2.1053  
95.635(b)(7)

## UNWANTED RADIATION:

The tabulated Data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 MHz to at least the 10th harmonic of the fundamental. This test was conducted per ANSI C63.4-2003.

REQUIREMENTS: FRS:  $43 + 10\log(.5) = 40.06$  dB

<b>Emission Frequency MHz</b>	<b>Ant. Polarity</b>	<b>dB Below Carrier (dBc)</b>
<b>467.56</b>	V	0
<b>935.13</b>	H	57.65
<b>1402.69</b>	V	60.02
<b>1870.25</b>	H	63.51
<b>2337.81</b>	V	75.6
<b>2805.38</b>	H	81.19
<b>3272.94</b>	V	70.47
<b>3740.50</b>	V	67.23
<b>4208.06</b>	V	53.95
<b>4675.63</b>	V	57.54

METHOD OF MEASUREMENT: The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. This test was conducted per TIA/EIA standard 603 using the substitution method. Measurements were made at the open field test site of TIMCO ENGINEERING, INC. located at 849 NW State Road 45, Newberry, FL 32669.

APPLICANT: COBRA ELECTRONICS CORPORATION  
FCC ID: BBOLI6500  
REPORT #: C\COBRA\2833AUT6\2833AUT6TestReport.doc

# TIMCO ENGINEERING INC.


849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

## Method of Measuring Radiated Spurious Emissions

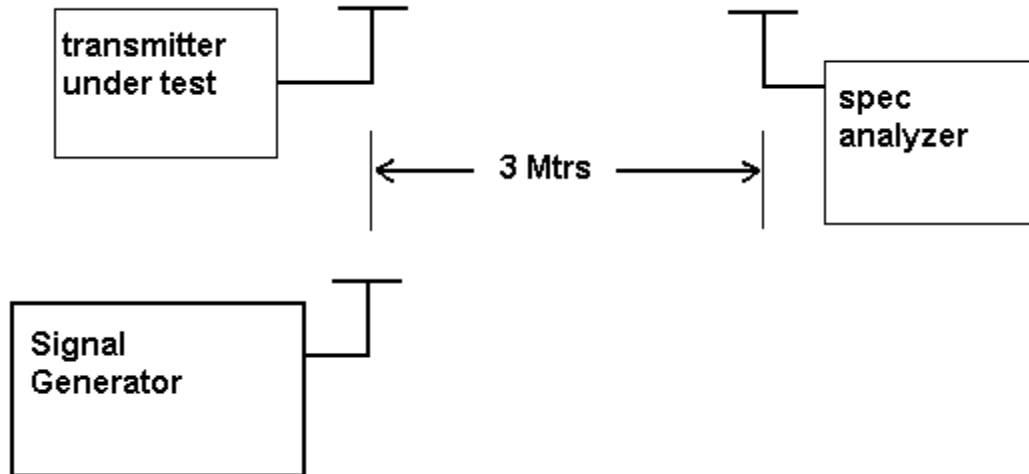

Equipment placed 80 cm above ground  
on a rotatable platform.

\* Appropriate antenna raised from 1 to 4 M.

APPLICANT: COBRA ELECTRONICS CORPORATION

FCC ID: BBOLI6500

REPORT #: C\COBRA\2833AUT6\2833AUT6TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

2.1055 Frequency stability:  
95.621(b)

Temperature and voltage tests were performed to verify that the frequency remains within the 0.0005%, 5 ppm specification limit. The test was conducted as follows: The transmitter was placed in the temperature chamber at 25° C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15 second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30° C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15 second intervals. The worst case number was recorded for temperature plotting. This procedure was repeated in 10 degree increments up to + 50° C.

Readings were also taken at plus and minus 15% of the battery voltage of 7.4 VDC.

## MEASUREMENT DATA:

	Ref. Freq.	
	462.575323	
TEMPERATURE °C	FREQUENCY MHz	PPM
-30C	462.57446	-1.66
-20C	462.57478	-0.97
-10C	462.57568	0.97
0C	462.57612	1.92
10C	462.57587	1.38
20C	462.57550	0.58
30C	462.57508	-0.32
40C	462.57485	-0.82
50C	462.57498	-0.54
Batt. Volts	Data	PPM
-15%	462.575463	0.19
+15%	462.575460	0.18

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

## EMC Equipment List

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3/10-Meter OATS	TEI	N/A	N/A	Listed 3/27/04	3/26/07
3-Meter OATS	TEI	N/A	N/A	Listed 1/11/06	1/10/09
Antenna: Biconnical	Eaton	94455-1	1057	CAL 12/12/05	12/12/07
Antenna: Biconnical	Electro-Metrics	BIA-25	1171	CAL 4/29/05	4/29/07
Analyzer Blue Tower Quasi-Peak Adapter	HP	85650A	2811A01279	CAL 4/13/05	4/13/07
Analyzer Blue Tower RF Preselector	HP	85685A	2926A00983	CAL 9/5/05	9/5/07
Analyzer Blue Tower Spectrum Analyzer	HP	8568B	2928A04729 2848A18049	CAL 4/13/05	4/13/07
LISN	Electro-Metrics	EM-7820	2682	CAL 4/28/05	4/28/07
Antenna: Log-Periodic	Eaton	96005	1243	CAL 12/14/05	12/14/07