

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: tei@timcoengr.com

Test Report

Product Name: MARINE RADIO

FCC ID: BBOMRHH425

Applicant:

**COBRA ELECTRONICS CORPORATION
6500 WEST CORTLAND STREET
CHICAGO IL 60707
USA**

Date Receipt: 12/6/2006

Date Tested: 12/21/2006

APPLICANT: COBRA ELECTRONICS CORPORATION
FCC ID: BBOMRHH425
REPORT #: V:\C\COBRA\3329BUT6\3329BUT6TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: tei@timcoengr.com

TABLE OF CONTENTS LIST

APPLICANT: COBRA ELECTRONICS CORPORATION

FCC ID: BBOMRHH425

TEST REPORT:

PAGE 1.....	GENERAL INFORMATION & TECHNICAL DESCRIPTION
PAGE 2.....	TECHNICAL DESCRIPTION CONTINUED
	RF POWER OUTPUT
PAGE 3.....	TECHNICAL DATA
PAGE 4.....	VOICE MODULATION CHARACTERISTICS
	AUDIO FREQUENCY RESPONSE
PAGE 5.....	AUDIO LOW PASS FILTER
PAGE 6.....	MODULATION LIMITING
PAGE 7.....	OCCUPIED BANDWIDTH
PAGE 8.....	OCCUPIED BANDWIDTH PLOT
PAGE 9.....	SPURIOUS EMISSIONS AT ANTENNA TERMINALS
PAGE 10.....	METHOD OF MEASURING CONDUCTED SPURIOUS EMISSIONS
PAGE 11.....	FIELD STRENGTH OF SPURIOUS EMISSIONS
PAGE 12.....	METHOD OF MEASURING RADIATED SPURIOUS EMISSIONS
PAGE 13.....	FREQUENCY STABILITY
PAGE 14.....	LIST OF TEST EQUIPMENT

EXHIBITS INCLUDING:

CONFIDENTIALITY REQUEST LETTER
BLOCK DIAGRAM
SCHEMATIC
PARTS LIST
USERS MANUAL
LABEL SAMPLE
LABEL LOCATION
EXTERNAL PHOTOGRAPHS
INTERNAL PHOTOGRAPHS
OPERATIONAL DESCRIPTION
TUNING PROCEDURE
TEST SET UP PHOTOGRAPHS

APPLICANT: COBRA ELECTRONICS CORPORATION

FCC ID: BBOMRHH425

REPORT #: V:\C\COBRA\3329BUT6\3329BUT6TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: tei@timcoengr.com

GENERAL INFORMATION

2.1033(c) COBRA ELECTRONICS CORPORATION will sell the FCC ID: BBOMRHH425 VHF Marine transmitter in quantity, for Use under FCC RULES PART 80.

TECHNICAL DESCRIPTION

(4) Type of Emission: 16K0F3E

Bn = 2M + 2DK
M = 3000
D = 5.0KHz (Peak Deviation)
K = 1
Bn = 2(3.0K) + 2(5.0K)(1) = 6.0K + 10.0 = 16.0K

80.205 (a) ALLOWED AUTHORIZED BANDWIDTH = 20.00 kHz

2.1033(c)(6) Frequency Range: 156.025 - 157.425 MHz

2.1033(c)(7) Power Range and Controls: There is a user Power switch for High/Low Power. Maximum Output Power Rating: High (5.0) Watts, low (1.0) Watt into a 50 ohm resistive load.

2.1033(c)(8) DC Voltages and Current into Final Amplifier:

POWER INPUT
FINAL AMPLIFIER ONLY

FOR LOW POWER SETTING INPUT POWER: (7.2V)(0.79A) = 5.69 Watts
FOR HIGH POWER SETTING INPUT POWER: (7.2V)(1.88A) = 13.54 Watts

Function of each electron tube or semiconductor device or other active circuit device is included in the parts list exhibit.

2.1033(c)(9) Complete Circuit Diagrams: The circuit and block diagrams are included.

2.1033(c)(10) Instruction book. The instruction manual is included.

APPLICANT: COBRA ELECTRONICS CORPORATION

FCC ID: BBOMRHH425

REPORT #: V:\C\COBRA\3329BUT6\3329BUT6TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: tei@timcoengr.com

2.1033(c)(11) Tune-up procedure. The tune-up procedure is included.

Description of all circuitry and devices provided for determining and stabilizing frequency is included in the circuit description

2.1033(c)(11) Digital modulation. This unit does NOT use digital modulation.

The data required by 2.1046 through 2.1055 is submitted below.


RF power output.

80.215 (e)(1)

RF power is measured by connecting a 50 ohm, resistive wattmeter to the RF output connector. With a nominal battery voltage, and the transmitter properly adjusted the RF output measures:

OUTPUT POWER: HIGH: 5 W CONDUCTED
LOW: 1 W CONDUCTED

METHOD OF MEASURING RF POWER OUTPUT

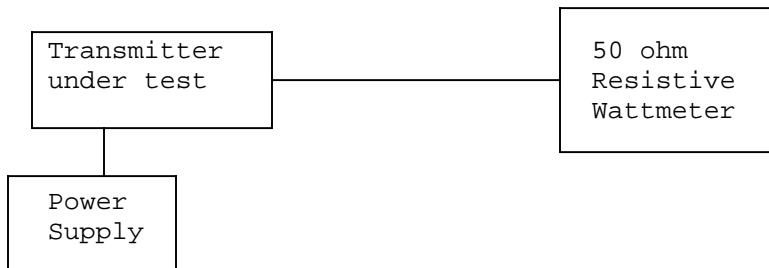

APPLICANT: COBRA ELECTRONICS CORPORATION

FCC ID: BBOMRHH425

REPORT #: V:\C\COBRA\3329BUT6\3329BUT6TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: tei@timcoengr.com

TECHNICAL DATA:

80.203 (b) **External Controls:** The transmitter is capable of changing frequency between 156.05 - 157.425 MHz by external control. The available channels are shown in the User Manual description Channel List. These channels are preprogrammed by the manufacturer and change of frequency is inaccessible to the station operator.

80.203 (c) Five minutes continuous transmission test. The antenna was connected to a dummy load and the radio was locked in a transmit PTT mode. An external timer digital clock was used to observe the duration of the un-modulated transmission. The transmitter turned off and the radio went to receive mode at 4 minutes, 58 seconds as displayed by the external digital clock.

APPLICANT: COBRA ELECTRONICS CORPORATION

FCC ID: BBOMRHH425

REPORT #: V:\C\COBRA\3329BUT6\3329BUT6TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669


<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: tei@timcoengr.com

2.1047(a) Voice Modulation_characteristics:

(b) AUDIO_FREQUENCY_RESPONSE

Audio Frequency Response Plot

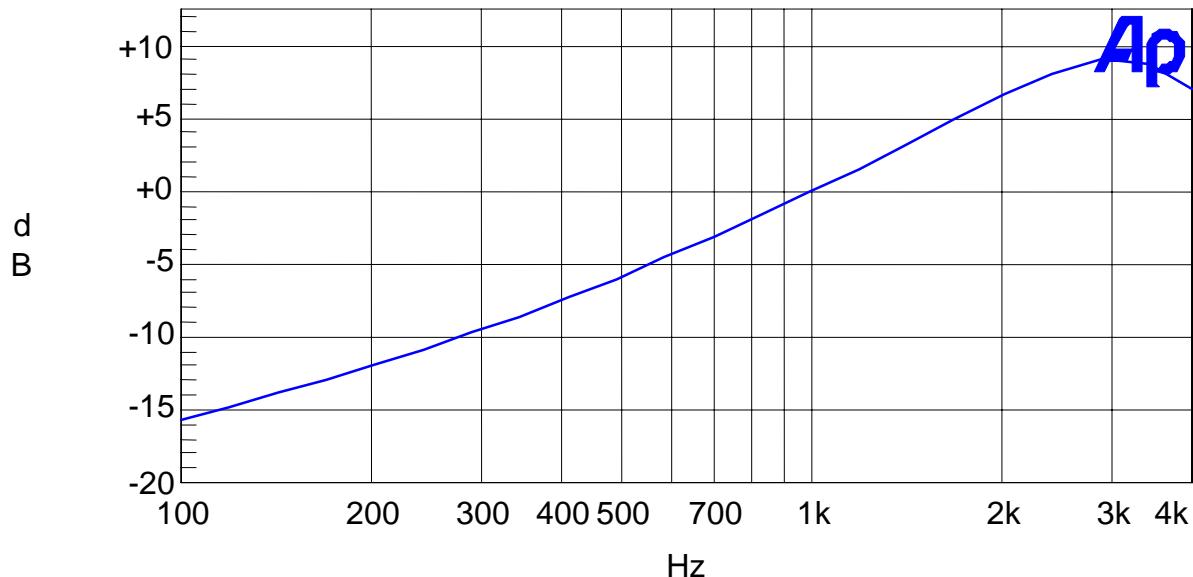

APPLICANT: COBRA ELECTRONICS CORPORATION

FCC ID: BBOMRHH425

REPORT #: V:\C\COBRA\3329BUT6\3329BUT6TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669


<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: tei@timcoengr.com

2.1047(a) AUDIO_LOW_PASS_FILTER

The audio low pass filter shown in the following plot.

Audio Low Pass Filter

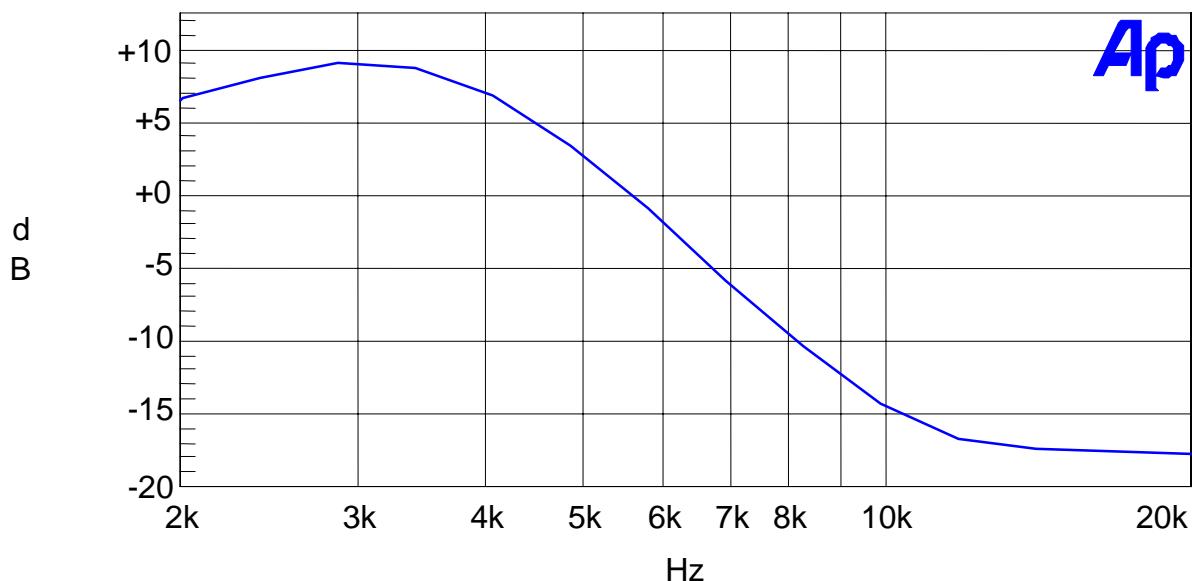

Color	Line Style	Thick	Data	Axis
Blue	Solid	1	Anlr.Level A!Normalize	Left

APPLICANT: COBRA ELECTRONICS CORPORATION

FCC ID: BBOMRHH425

REPORT #: V:\C\COBRA\3329BUT6\3329BUT6TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: tei@timcoengr.com


2.1047(b)

80.213 (d)

Audio_input_versus_modulation

A plot of the audio input versus deviation is shown in the following plot.

Modulation Limiting Plots:
2.5 KHz (Green), 1.0 KHz (Blue), and 300 Hz (Yellow)

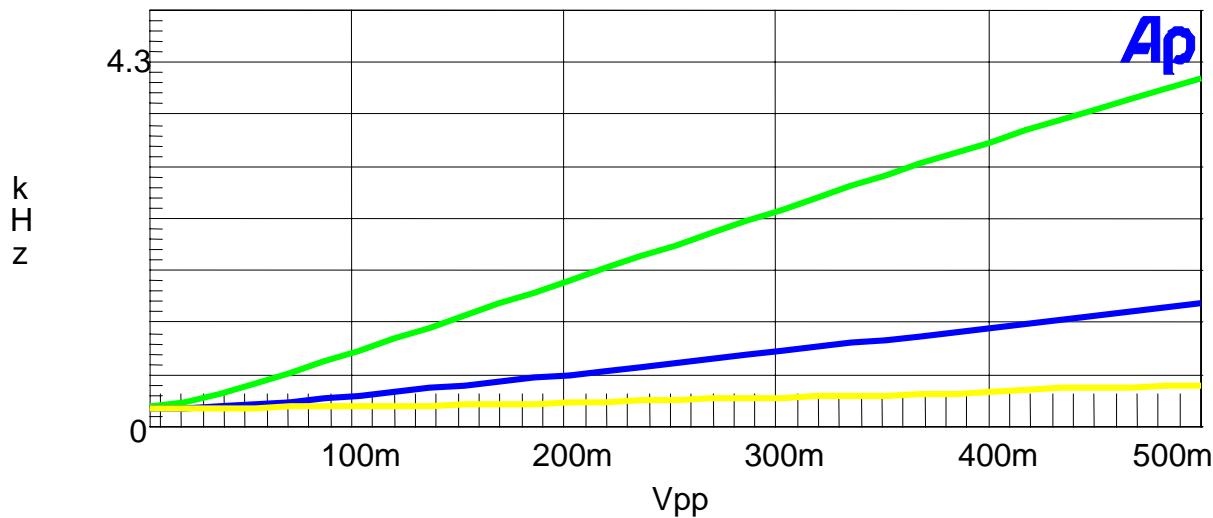

Color	Line Style	Thick	Data	Axis
Green	Solid	3	Anlr.Level A	Left
Blue	Solid	3	Anlr.Level A	Left
Yellow	Solid	3	Anlr.Level A	Left

APPLICANT: COBRA ELECTRONICS CORPORATION

FCC ID: BBOMRHH425

REPORT #: V:\C\COBRA\3329BUT6\3329BUT6TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: tei@timcoengr.com

2.1049(c)

Occupied bandwidth:

80.213 (b)


Data in the plots shows that on any frequency removed from the assigned frequency by more than 50%, but not more than 100%: At least 25dB. On any frequency removed from the assigned frequency by more than 100%, but not more than 250%: At least 35dB. On any frequency removed from the assigned frequency by more than 250%, of the authorized bandwidth:
At least $43 + \log(P)$ dB.

Radiotelephone transmitter with modulation limiter.

Test procedure: TIA/EIA-603 para 2.2.11, with the exception that various tones were used.

Test procedure diagram

OCCUPIED BANDWIDTH MEASUREMENT

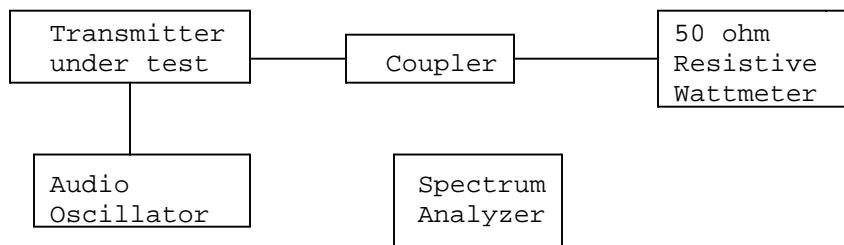

APPLICANT: COBRA ELECTRONICS CORPORATION

FCC ID: BBOMRHH425

REPORT #: V:\C\COBRA\3329BUT6\3329BUT6TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669


<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: tei@timcoengr.com

OCCUPIED BANDWIDTH PLOT

NOTES:

COBRA ELECTRONICS CORPORATION - FCC ID: BBOMRHH425
OCCUPIED BANDWIDTH PLOT

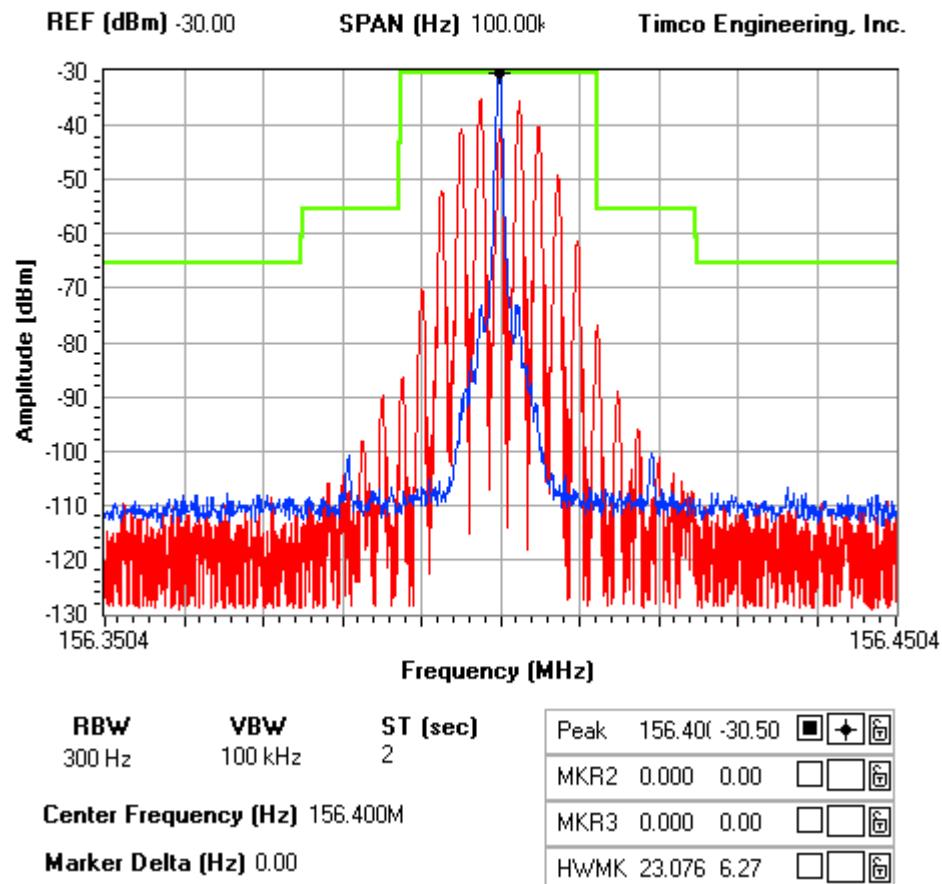

APPLICANT: COBRA ELECTRONICS CORPORATION

FCC ID: BBOMRHH425

REPORT #: V:\C\COBRA\3329BUT6\3329BUT6TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: tei@timcoengr.com

2.1051

80.211

Spurious emissions at antenna terminals (conducted):

The data on the following page shows the level of conducted spurious responses. The carrier was modulated 100% using a 2500Hz tone. The spectrum was scanned from 0.4 to at least the 10th harmonic of the fundamental. The measurements were made in accordance with standard TIA/EIA-603.

REQUIREMENTS:

Emissions must be $43 + 10\log(Po)$ dB below the mean power output of the transmitter.

43 + 10log(5) = 50

43 + 10log(1) = 43

TF HIGH POWER	EF	dB below carrier		TF LOW POWER	EF	dB below carrier
156.42	312.84	65.7		156.42	312.84	61.7
	469.26	56.1			469.26	57.8
	625.68	65.5			625.68	57.6
	782.10	61.3			782.10	69.5
	938.52	77.8			938.52	80
	1094.94	90.6			1094.94	91.4
	1251.36	88.1			1251.36	82.1
	1407.78	88.2			1407.78	90.3
	1564.20	93.4			1564.20	90.7

TF HIGH POWER	EF	dB below carrier		TF LOW POWER	EF	dB below carrier
157.45	314.90	64.6		157.45	314.90	60.6
	472.35	55.4			472.35	56.7
	629.80	64.8			629.80	57.9
	787.25	61.3			787.25	71.5
	944.70	78			944.70	80
	1102.15	90.1			1102.15	90.9
	1259.60	87.8			1259.60	81.5
	1417.05	87.7			1417.05	89.7
	1574.50	92.4			1574.50	90.7

APPLICANT: COBRA ELECTRONICS CORPORATION

FCC ID: BBOMRHH425

REPORT #: V:\C\COBRA\3329BUT6\3329BUT6TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: tei@timcoengr.com

Method of Measuring Conducted Spurious Emissions



METHOD OF MEASUREMENT: The procedure used was TIA/EIA-603 Standard without any exceptions. The measurements were made using the shielded room located at TIMCO ENGINEERING INC. 849 STATE ROAD 45, NEWBERRY FLORIDA 32669.

APPLICANT: COBRA ELECTRONICS CORPORATION

FCC ID: BBOMRHH425

REPORT #: V:\C\COBRA\3329BUT6\3329BUT6TestReport.doc

Page 10 of 14

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: tei@timcoengr.com

2.1053(a)

Field strength of spurious emissions:

NAME OF TEST: RADIATED SPURIOUS EMISSIONS

REQUIREMENTS: Emissions must be $43 + 10\log(Po)$ dB below the mean power output of the transmitter.

TEST DATA:

$43 + 10\log(5) = 50$

$43 + 10\log(1) = 43$

TF HIGH POWER	Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
156.42	312.80	V	76.24
	469.20	V	67.81
	625.60	V	69.35
	782.00	V	72.52
	938.40	V	77.88
	1094.80	H	88.49
	1251.20	H	87.3
	1407.60	H	92.5
	1564.00	V	90.11

TF LOW POWER	Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
156.42	312.80	V	76.15
	469.20	H	72.52
	625.60	V	64.66
	782.00	V	73.73
	938.40	V	70.29
	1094.80	V	87.3
	1251.20	H	82.11
	1407.60	V	80.41
	1564.00	H	83.42

TF HIGH POWER	Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
157.45	314.85	V	77.54
	472.28	V	66.23
	629.70	V	68.52
	787.13	V	71.13
	944.55	H	86.67
	1101.98	V	97.25
	1259.40	V	95.35
	1416.83	H	92.45
	1574.25	H	89.51

TF LOW POWER	Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
157.45	314.85	V	76.75
	472.28	H	72.54
	629.70	V	65.13
	787.13	V	74.44
	944.55	V	82.68
	1101.98	V	87.86
	1259.40	H	81.66
	1416.83	H	85.76
	1574.25	H	82.02

APPLICANT: COBRA ELECTRONICS CORPORATION

FCC ID: BBOMRHH425


REPORT #: V:\C\COBRA\3329BUT6\3329BUT6TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: tei@timcoengr.com

2.1053(a) Continued Field_strength_of_spurious_emissions:

Method of Measuring Radiated Spurious Emissions

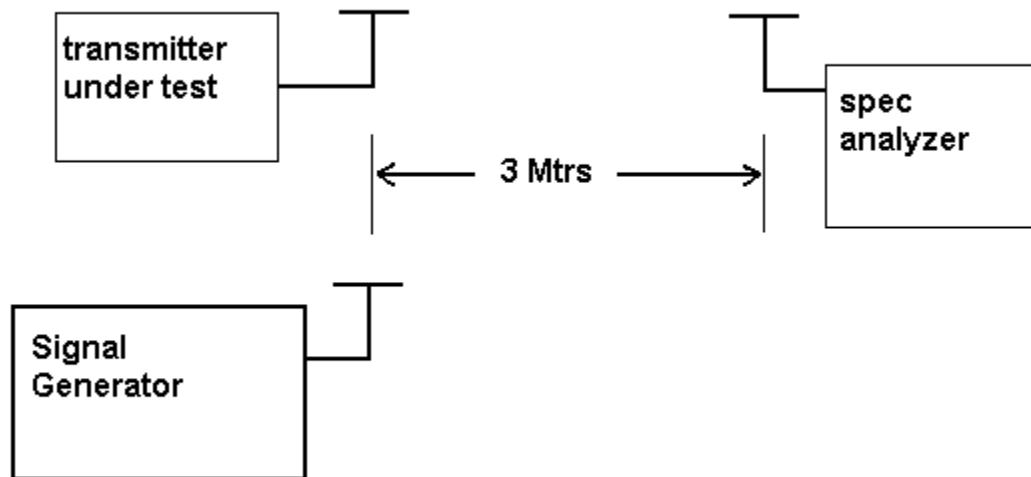

METHOD OF MEASUREMENT: The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 to at least the tenth harmonic of the fundamental. This test was conducted per TIA/EIA STANDARD 603 using the substitution method. Measurements were made at the open field test site of TIMCO ENGINEERING, INC. located at 849 N.W. State Road 45, Newberry, FL 32669.

APPLICANT: COBRA ELECTRONICS CORPORATION

FCC ID: BBOMRHH425

REPORT #: V:\C\COBRA\3329BUT6\3329BUT6TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: tei@timcoengr.com

Frequency stability:

2.1055(a)(2)

80.209 (a)

Temperature and voltage tests were performed to verify that the frequency remains within the .0010%, 10.0ppm specification limit, for 20kHz spacing. The test was conducted as follows: The transmitter was placed in the temperature chamber at 25° C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15 second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30° C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15 sec intervals. The worst-case number was recorded for temperature plotting. This procedure was repeated in 10-degree increments up to + 50° C.

MEASUREMENT DATA:

Assigned Frequency (Ref. Frequency): 156.400 000MHz

TEMPERATURE °C	FREQUENCY MHz	PPM
-20C	156.399707	-3.20
-10C	156.400066	-0.90
0C	156.400235	0.18
10C	156.400285	0.50
20C	156.400207	0.00
30C	156.400075	-0.84
40C	156.400021	-1.19
50C	156.400123	-0.54
-15%		-0.03

APPLICANT: COBRA ELECTRONICS CORPORATION

FCC ID: BBOMRHH425

REPORT #: V:\C\COBRA\3329BUT6\3329BUT6TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: tei@timcoengr.com

EMC Equipment List

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3/10-Meter OATS	TEI	N/A	N/A	Listed 3/27/04	3/26/07
3-Meter OATS	TEI	N/A	N/A	Listed 1/11/06	1/10/09
Antenna: Biconnical	Eaton	94455-1	1057	CAL 12/12/05	12/12/07
Antenna: Biconnical	Eaton	94455-1	1096	CAL 10/11/06	10/11/08
Antenna: Biconnical	Electro-Metrics	BIA-25	1171	CAL 4/29/05	4/29/07
Analyzer Blue Tower Quasi-Peak Adapter	HP	85650A	2811A01279	CAL 4/13/05	4/13/07
Analyzer Blue Tower RF Preselector	HP	85685A	2926A00983	CAL 9/5/05	9/5/07
Analyzer Blue Tower Spectrum Analyzer	HP	8568B	2928A04729 2848A18049	CAL 4/13/05	4/13/07
LISN	Electro-Metrics	ANS-25/2	2604	CAL 10/5/06	10/5/08
LISN	Electro-Metrics	EM-7820	2682	CAL 4/28/05	4/28/07
Antenna: Log-Periodic	Eaton	96005	1243	CAL 12/14/05	12/14/07

APPLICANT: COBRA ELECTRONICS CORPORATION

FCC ID: BBOMRHH425

REPORT #: V:\C\COBRA\3329BUT6\3329BUT6TestReport.doc