

# FCC Test Report

Product Name	DIGITAL CAMERA
Model No.	R04010
FCC ID.	BBP-R04010

Applicant	Ricoh Company Ltd
Address	2-7-1 Izumi Ebina Kanagawa, 243-0460 Japan.

Date of Receipt	Jun. 24, 2021
Issued Date	Sep. 08, 2021
Report No.	2161023R-RFUSBLEV01-A
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

# Test Report


Issued Date: Sep. 08, 2021

Report No.: 2161023R-RFUSBLEV01-A




Product Name	DIGITAL CAMERA
Applicant	Ricoh Company Ltd
Address	2-7-1 Izumi Ebina Kanagawa, 243-0460 Japan.
Manufacturer	Ricoh Company, Ltd.
Model No.	R04010
FCC ID.	BBP-R04010
EUT Rated Voltage	DC 5V by USB or DC 3.6V by Battery
EUT Test Voltage	DC 5V by USB
Trade Name	RICOH
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C ANSI C63.4: 2014, ANSI C63.10: 2013
Test Result	Complied

Documented By :




(Senior Project Specialist / April Chen)

Tested By :



(Senior Engineer / Bill Lin)

Approved By :



(Senior Engineer / Alan Chen)

## TABLE OF CONTENTS

Description	Page
<b>1. GENERAL INFORMATION .....</b>	<b>5</b>
1.1. EUT Description.....	5
1.2. Tested System Details.....	7
1.3. Configuration of Tested System .....	7
1.4. EUT Exercise Software .....	7
1.5. Test Facility .....	8
1.6. List of Test Equipment.....	9
1.7. Uncertainty .....	10
<b>2. CONDUCTED EMISSION .....</b>	<b>11</b>
2.1. Test Setup .....	11
2.2. Limits.....	11
2.3. Test Procedure .....	12
2.4. Test Result of Conducted Emission.....	13
<b>3. PEAK POWER OUTPUT .....</b>	<b>15</b>
3.1. Test Setup .....	15
3.2. Limit .....	15
3.3. Test Procedure .....	15
3.4. Test Result of Peak Power Output .....	16
<b>4. RADIATED EMISSION .....</b>	<b>18</b>
4.1. Test Setup .....	18
4.2. Limits.....	19
4.3. Test Procedure .....	20
4.4. Test Result of Radiated Emission.....	22
<b>5. RF ANTENNA CONDUCTED TEST .....</b>	<b>38</b>
5.1. Test Setup .....	38
5.2. Limits.....	38
5.3. Test Procedure .....	38
5.4. Test Result of RF Antenna Conducted Test.....	39
<b>6. BAND EDGE .....</b>	<b>41</b>
6.1. Test Setup .....	41
6.2. Limit .....	42
6.3. Test Procedure .....	42
6.4. Test Result of Band Edge .....	44
<b>7. 6DB BANDWIDTH .....</b>	<b>60</b>
7.1. Test Setup .....	60
7.2. Limits.....	60
7.3. Test Procedure .....	60
7.4. Test Result of 6dB Bandwidth.....	61
<b>8. POWER DENSITY .....</b>	<b>65</b>
8.1. Test Setup .....	65
8.2. Limits.....	65
8.3. Test Procedure .....	65
8.4. Test Result of Power Density .....	66
<b>9. DUTY CYCLE.....</b>	<b>70</b>
9.1. Test Setup .....	70
9.2. Test Procedure .....	70
9.3. Test Result of Duty Cycle.....	71
<b>10. EMI REDUCTION METHOD DURING COMPLIANCE TESTING .....</b>	<b>73</b>

Appendix 1: EUT Test Photographs

Appendix 2: EUT Detailed Photographs

## Revision History

Report No.	Version	Description	Issued Date
2161023R-RFUSBLEV01-A	V1.0	Initial issue of report.	Sep. 08, 2021

## 1. GENERAL INFORMATION

### 1.1. EUT Description

Product Name	DIGITAL CAMERA
Trade Name	RICOH
Model No.	R04010
FCC ID.	BBP-R04010
Frequency Range	2402 – 2480MHz
Channel Separation	2MHz
Channel Number	Bluetooth V5.0: 40CH
Type of Modulation	Bluetooth V5.0: GFSK (1Mbps)/( 2Mbps)
Antenna Type	PIFA Antenna
Channel Control	Auto
Antenna Gain	Refer to the table “Antenna List”
USB Cable	Trade Name:YiChenXing, M/N: YCX-A0020184A Shielded, 0.40m
Serial No.	A0M63P000070
FW version	0.89

#### Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	LYNwave	ALX20M-222AAA-00(Main) ALX20M-222AAA-01(Aux)	PIFA Antenna	1.4 dBi for 2.4 GHz

Note: The antenna of EUT is conforming to FCC 15.203.

Center Frequency of Each Channel: (For Bluetooth V4.2)

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 00:	2402 MHz	Channel 01:	2404 MHz	Channel 02:	2406 MHz	Channel 03:	2408 MHz
Channel 04:	2410 MHz	Channel 05:	2412 MHz	Channel 06:	2414 MHz	Channel 07:	2416 MHz
Channel 08:	2418 MHz	Channel 09:	2420 MHz	Channel 10:	2422 MHz	Channel 11:	2424 MHz
Channel 12:	2426 MHz	Channel 13:	2428 MHz	Channel 14:	2430 MHz	Channel 15:	2432 MHz
Channel 16:	2434 MHz	Channel 17:	2436 MHz	Channel 18:	2438 MHz	Channel 19:	2440 MHz
Channel 20:	2442 MHz	Channel 21:	2444 MHz	Channel 22:	2446 MHz	Channel 23:	2448 MHz
Channel 24:	2450 MHz	Channel 25:	2452 MHz	Channel 26:	2454 MHz	Channel 27:	2456 MHz
Channel 28:	2458 MHz	Channel 29:	2460 MHz	Channel 30:	2462 MHz	Channel 31:	2464 MHz
Channel 32:	2466 MHz	Channel 33:	2468 MHz	Channel 34:	2470 MHz	Channel 35:	2472 MHz
Channel 36:	2474 MHz	Channel 37:	2476 MHz	Channel 38:	2478 MHz	Channel 39:	2480 MHz

Note:

1. The EUT is a DIGITAL CAMERA with built-in WLAN and Bluetooth transceiver, this report for Bluetooth V5.0.
2. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.
3. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
4. These tests were conducted on a sample for the purpose of demonstrating compliance of Bluetooth V5.0 transmitter with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.

Test Mode	Mode 1: Transmit - BLE 1Mbps Mode 1: Transmit - BLE 2Mbps
-----------	--


## 1.2. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook PC	DELL	Latitude E5440	FS9TK32	N/A

Signal Cable Type	Signal cable Description
A	USB Cable
	Shielded, 0.4m

## 1.3. Configuration of Tested System

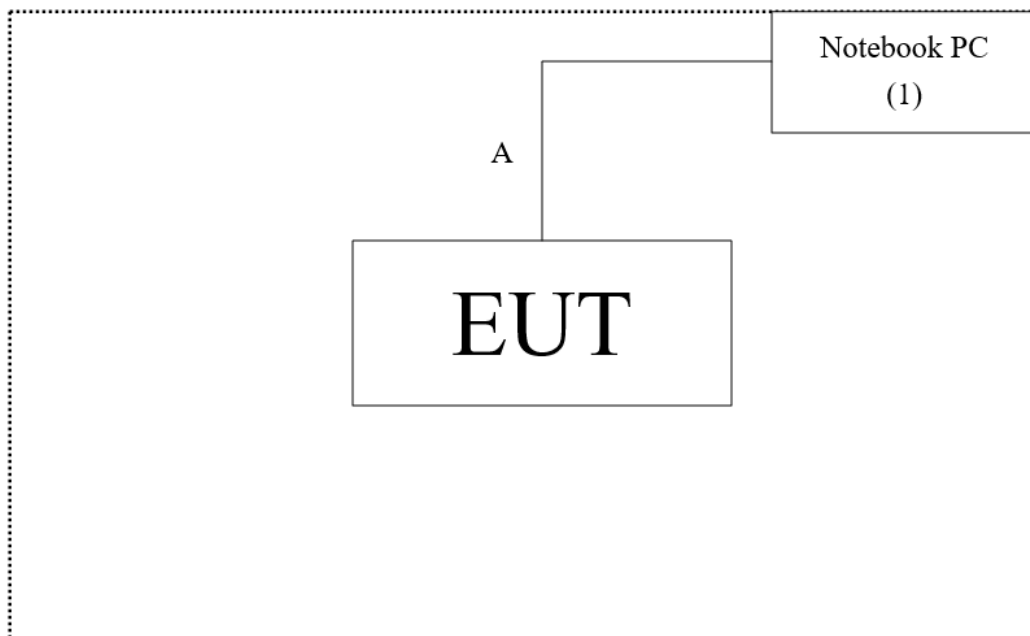

## 1.4. EUT Exercise Software

1. Setup the EUT as shown in Section 1.3.
2. Execute software “Qualcomm ® Radio Control Toolkit Version 4.0.00172.0” on the Notebook PC.
3. Configure the test mode, the test channel, and the data rate.
4. Press “OK” to start the continuous Transmit.
5. Verify that the EUT works properly.

## 1.5. Test Facility

Ambient conditions in the laboratory:

Performed Item	Items	Required	Actual
Conducted Emission	Temperature (°C)	10~40 °C	28.2 °C
	Humidity (%RH)	10~90 %	66.9 %
Radiated Emission	Temperature (°C)	10~40 °C	25.5 °C
	Humidity (%RH)	10~90 %	62.3 %
Conductive	Temperature (°C)	10~40 °C	22.0 °C
	Humidity (%RH)	10~90 %	55.0 %

**USA : FCC Registration Number: TW0033**

**Canada : IC Registration Number: 26930**

Site Description : Accredited by TAF  
Accredited Number: 3023

Test Laboratory : DEKRA Testing and Certification Co., Ltd  
Address : No. 26, Huaya 1st Rd., Guishan Dist.,  
Taoyuan City 333411, Taiwan, R.O.C.  
Phone number : 886-3-275-7255  
Fax number : 866-3-327-5505  
Email address : [info.tw@dekra.com](mailto:info.tw@dekra.com)  
Website : <http://www.dekra.com.tw>



## 1.6. List of Test Equipment

### For Conduction measurements /SH1

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due. Date
X	EMI Test Receiver	R&S	ESR7	101601	2021.01.04	2022.01.03
X	Two-Line V-Network	R&S	ENV216	101306	2021.04.08	2022.04.07
X	Two-Line V-Network	R&S	ENV216	101307	2021.04.16	2022.04.15
X	Coaxial Cable	DEKRA	RG400_BNC	RF001	2021.05.24	2022.05.23

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with “X” are used to measure the final test results.
3. Test Software version : DEKRA Testing System V2.0

### For Conducted measurements /SH2

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due. Date
X	Spectrum Analyzer	R&S	FSV30	103466	2020.12.28	2021.12.27
X	Power Meter	Anritsu	ML2496A	MY51000539	2021.06.07	2022.06.06
X	Power Sensor	Anritsu	MA2411B	MY59240002	2021.05.17	2022.05.16
X	Power Sensor	Anritsu	MA2411B	MY59240003	2021.05.17	2022.05.16

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with “X” are used to measure the final test results.
3. Test Software version : DEKRA Conduction Test System V9.0.5.

### For Radiated measurements / 966-3

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due. Date
X	Loop Antenna	AMETEK	HLA6121	56736	2021.04.14	2022.04.13
X	Bi-Log Antenna	SCHWARZBECK	VULB9168	9168-678	2020.09.04	2021.09.03
X	Horn Antenna	ETS-Lindgren	3117	00201259	2020.10.23	2021.10.22
X	Horn Antenna	Com-Power	AH-840	101087	2021.06.16	2022.06.15
X	Pre-Amplifier	EMCI	EMC001330	980302	2021.07.26	2022.07.25
X	Pre-Amplifier	EMCI	EMC051835SE	980312	2021.02.24	2022.02.23
X	Pre-Amplifier	EMCI	EMC05820SE	980308	2020.09.18	2021.09.17
X	Pre-Amplifier	EMCI	EMC184045SE	980369	2021.04.27	2022.04.26
X	Filter	MICRO TRONICS	BRM50702	G251	2020.09.17	2021.09.16
	Filter	MICRO TRONICS	BRM50716	G188	2020.09.17	2021.09.16
X	EMI Test Receiver	R&S	ESR7	102793	2020.12.17	2021.12.16
X	Spectrum Analyzer	R&S	FSV3044	101113	2021.02.03	2022.02.02
X	Coaxial Cable	SGH, EMCI	HA800 , SGH18	HY2103-001C	2021.03.03	2022.03.02
	Mircoflex Cable	HUBER SUHNER	SUCOFLEX 102	MY3381/2	2021.06.25	2022.06.24

Note:

1. Loop Antenna is calibrated every two years, the other equipments are calibrated every one year.
2. The test instruments marked with “X” are used to measure the final test results.
3. Test Software version : DEKRA Testing System V2.0

## 1.7. Uncertainty

Uncertainties have been calculated according to the DEKRA internal document, and is described in each test chapter of this report.


The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95%.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test item	Uncertainty	
Conducted Emission	±3.42 dB	
Peak Power Output	±0.91 dB	
Radiated Emission	Under 1GHz ±4.06 dB	Above 1GHz ±3.73 dB
RF Antenna Conducted Test	±2.53 dB	
Band Edge	Under 1GHz ±4.06 dB	Above 1GHz ±3.73 dB
6dB Bandwidth	±682.83 Hz	
Power Density	±2.53 dB	
Duty Cycle	±2.31 ms	

## 2. Conducted Emission

### 2.1. Test Setup

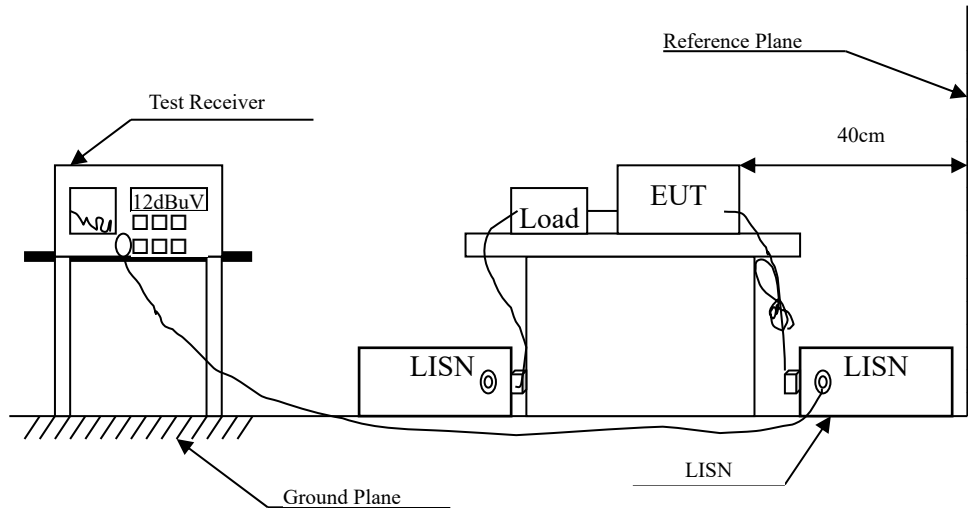

### 2.2. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

### 2.3. Test Procedure

The EUT and Peripherals are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs.)


Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

The EUT was setup to ANSI C63.4, 2014; tested to DTS test procedure of FCC KDB-558074 for compliance to FCC 47CFR Subpart C requirements.

### 2.4. Test Result of Conducted Emission

Model No	R04010	Site	SH1
Test Voltage	AC 120V/60Hz	Test Date	2021/8/25
Test Mode	Mode 1: Transmit	Engineer	Jason Tuan
Phase	L1	Temperature (°C)	28.2
Test Condition	--	Humidity (%RH)	66.9
Note	BLE 2M,2440MHz		

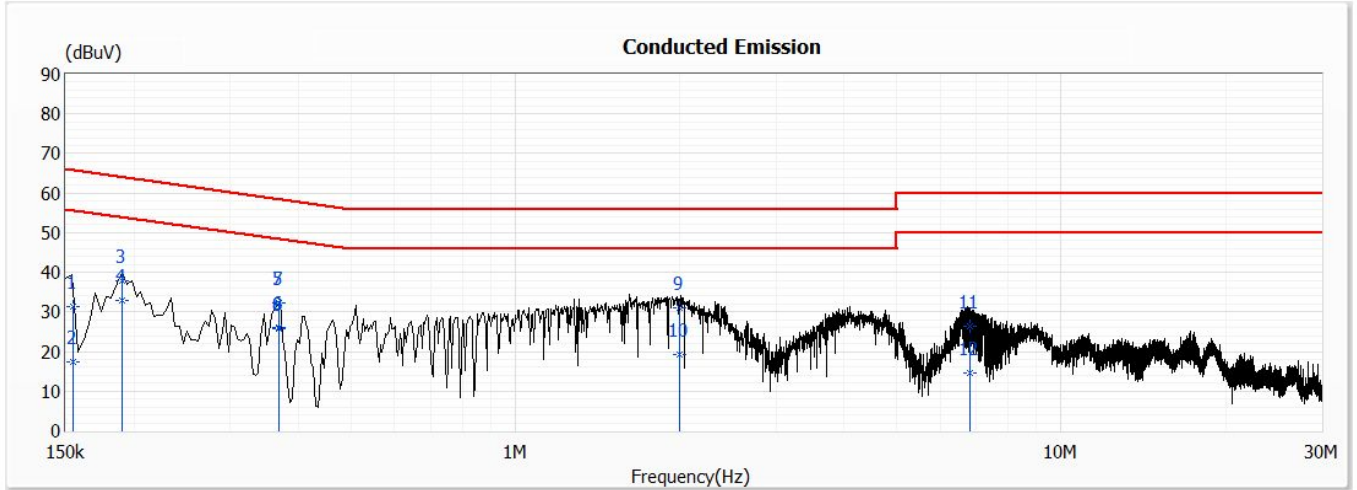


No	Frequency (MHz)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	0.155	31.40	65.74	-34.34	21.70	9.70	QP
2	0.155	17.46	55.74	-38.28	7.76	9.70	AV
3	0.190	38.01	64.02	-26.01	28.32	9.69	QP
*4	0.190	32.79	54.02	-21.23	23.10	9.69	AV
5	0.369	32.30	58.52	-26.22	22.60	9.70	QP
6	0.369	25.94	48.52	-22.58	16.24	9.70	AV
7	0.369	32.30	58.51	-26.21	22.60	9.70	QP
8	0.369	25.65	48.51	-22.86	15.95	9.70	AV
9	2.004	31.15	56.00	-24.85	21.32	9.83	QP
10	2.004	19.21	46.00	-26.79	9.38	9.83	AV
11	6.812	26.38	60.00	-33.62	15.55	10.83	QP
12	6.812	14.61	50.00	-35.39	3.78	10.83	AV

Note:

1. “ \* “ means this data is the worst emission level.
2. Emission Level = Reading Level + Correct Factor.
3. Margin = Emission Level – Limit.
4. Correct Factor = LISN insertion loss + Cable loss.

Model No	R04010	Site	ASR1-1
Test Voltage	AC 120V/60Hz	Test Date	2021/8/25
Test Mode	Mode 1: Transmit	Engineer	Jason Tuan
Phase	N	Temperature (°C)	28.2
Test Condition	--	Humidity (%RH)	66.9
Note	BLE 2M,2440MHz		

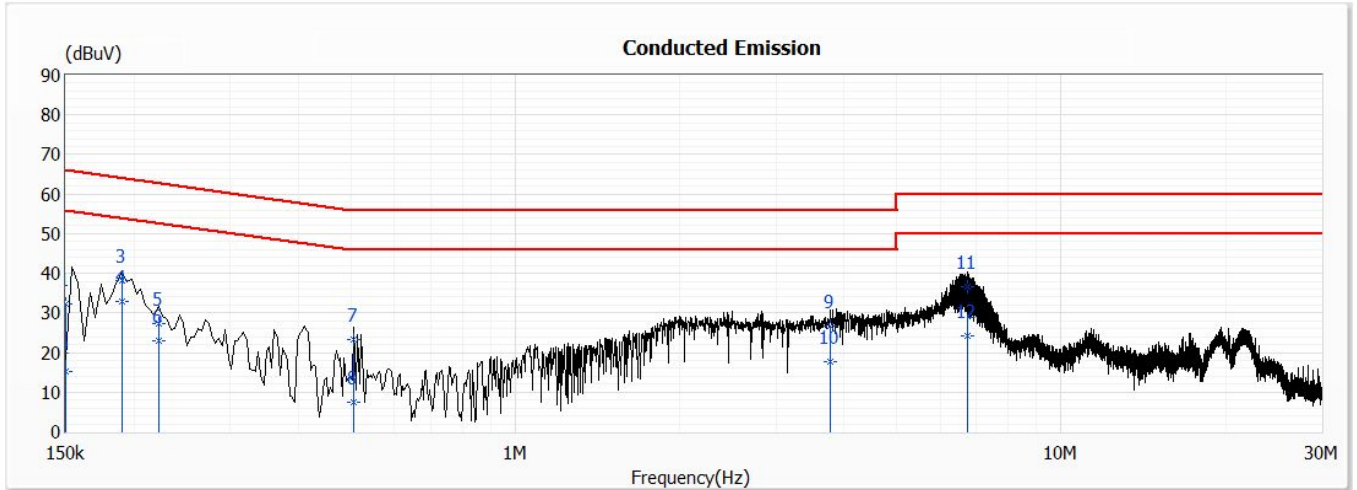

No	Frequency (MHz)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	0.150	32.16	65.99	-33.83	22.45	9.71	QP
2	0.150	15.09	55.99	-40.90	5.38	9.71	AV
3	0.190	38.07	64.02	-25.95	28.36	9.71	QP
*4	0.190	32.95	54.02	-21.07	23.24	9.71	AV
5	0.223	27.33	62.72	-35.39	17.62	9.71	QP
6	0.223	22.84	52.72	-29.88	13.13	9.71	AV
7	0.505	23.34	56.00	-32.66	13.63	9.71	QP
8	0.505	7.30	46.00	-38.70	-2.41	9.71	AV
9	3.779	26.66	56.00	-29.34	16.22	10.44	QP
10	3.779	17.79	46.00	-28.21	7.35	10.44	AV
11	6.735	36.66	60.00	-23.34	25.80	10.86	QP
12	6.735	24.19	50.00	-25.81	13.33	10.86	AV


Note:

1. “ \* “ means this data is the worst emission level.
2. Emission Level = Reading Level + Correct Factor.
3. Margin = Emission Level – Limit.
4. Correct Factor = LISN insertion loss + Cable loss.

Test Result of Conducted Emission	<b>PASS</b>
-----------------------------------	-------------

### 3. Peak Power Output

#### 3.1. Test Setup

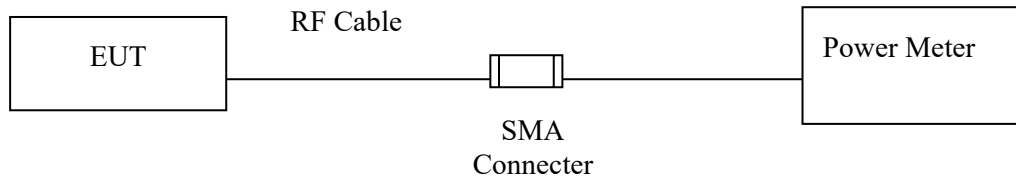

#### 3.2. Limit

The maximum peak power shall be less 1Watt.

#### 3.3. Test Procedure

The EUT was tested according to C63.10:2013 for compliance to FCC 47CFR 15.247 requirements. The maximum peak conducted output power using C63.10:2013 Section 11.9.1.3 PKPM1 Peak power meter method.

### 3.4. Test Result of Peak Power Output

Product : DIGITAL CAMERA  
Test Item : Peak Power Output  
Test Mode : Mode 1: Transmit - BLE 1Mbps  
Test Date : 2021/08/06

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402	0.37	1 Watt= 30 dBm	Pass
Channel 19	2440	-0.77	1 Watt= 30 dBm	Pass
Channel 39	2480	0.50	1 Watt= 30 dBm	Pass



Product : DIGITAL CAMERA  
Test Item : Peak Power Output  
Test Mode : Mode 1: Transmit - BLE 2Mbps  
Test Date : 2021/08/06


Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402	0.58	1 Watt= 30 dBm	Pass
Channel 19	2440	-0.57	1 Watt= 30 dBm	Pass
Channel 39	2480	0.74	1 Watt= 30 dBm	Pass

Test Result of Peak Power Output	<b>PASS</b>
----------------------------------	-------------


## 4. Radiated Emission

### 4.1. Test Setup


Radiated Emission Under 30MHz

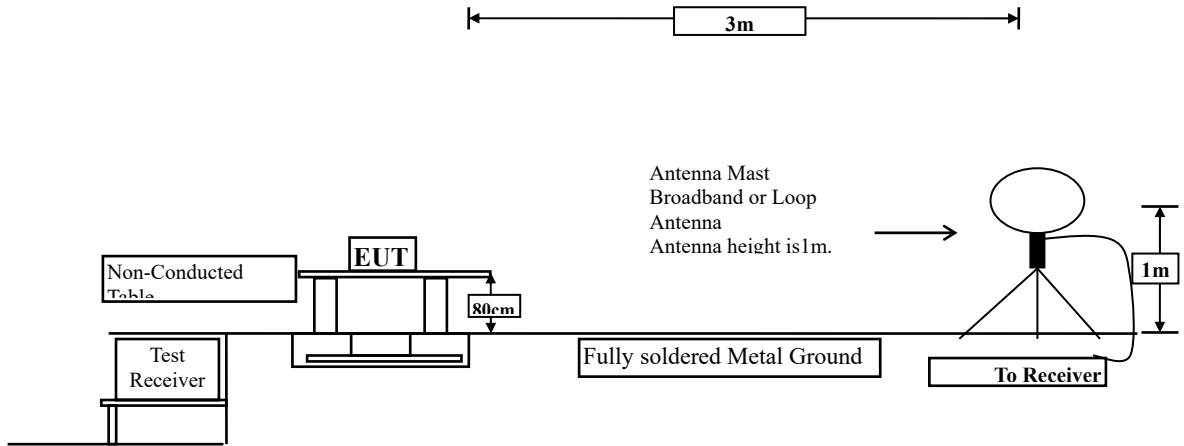

Radiated Emission Below 1GHz

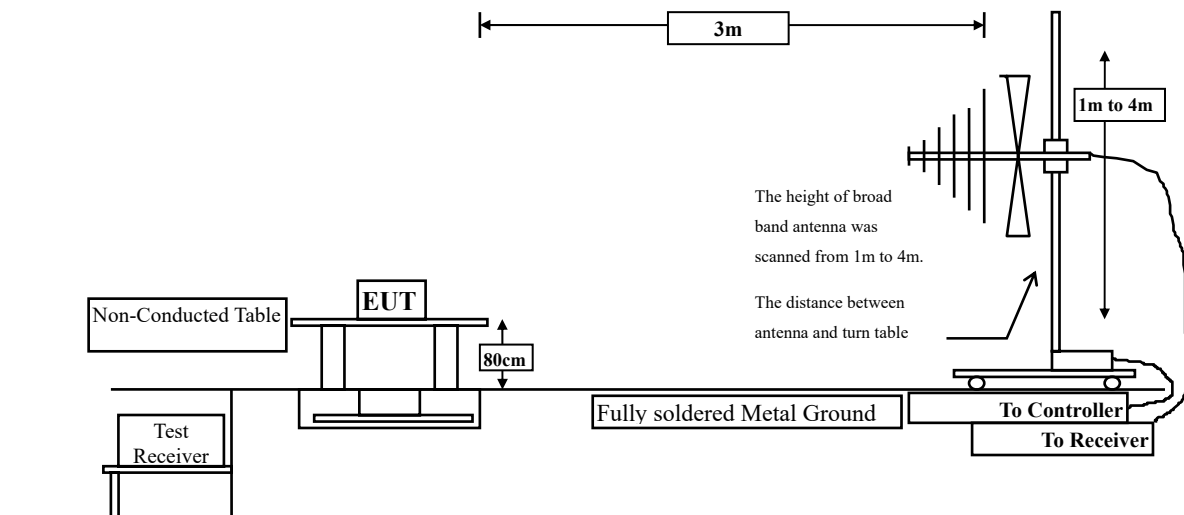

Radiated Emission Above 1GHz

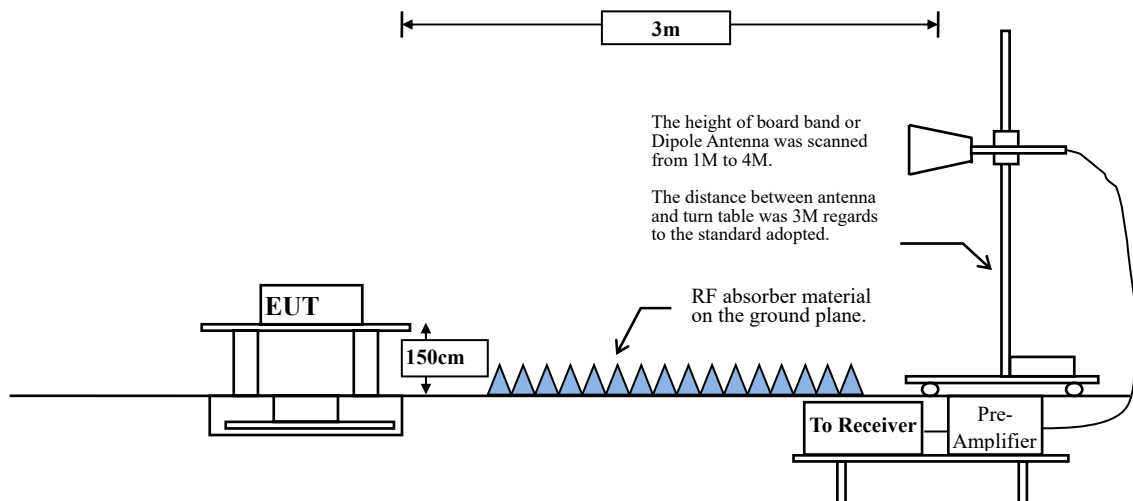

## 4.2. Limits

### ➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

<b>FCC Part 15 Subpart C Paragraph 15.209 Limits</b>		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

- Remarks:
1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
  2. In the Above Table, the tighter limit applies at the band edges.
  3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

### 4.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to C63.10:2013 Section 11.12.1 for compliance to FCC 47CFR 15.247 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna. The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

**RBW and VBW Parameter setting:**

According to C63.10 Section 11.12.2.4 Peak measurement procedure.

RBW = as specified in Table 1.

$VBW \geq 3 \times RBW$ .

**Table 1 —RBW as a function of frequency**

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

According to C63.10 Section 11.12.2.5 Average measurement procedure.

RBW = 1MHz.

VBW = 10Hz, when duty cycle  $\geq 98\%$

$VBW \geq 1/T$ , when duty cycle  $< 98\%$


( T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)

2.4GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
BLE 1Mbps	62.40	0.3900	2564	3000
BLE 2Mbps	32.91	0.2060	4854	5000

Note: Duty Cycle Refer to Section 9.

#### 4.4. Test Result of Radiated Emission

Model No	R04010	Site	966-3
Test Voltage	AC 120 V / 60 Hz	Test Date	2021/8/2
Test Mode	Mode 1: Transmit	Engineer	Nick Chen
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	BLE 1M,2.402GHz	Humidity (%RH)	62.3

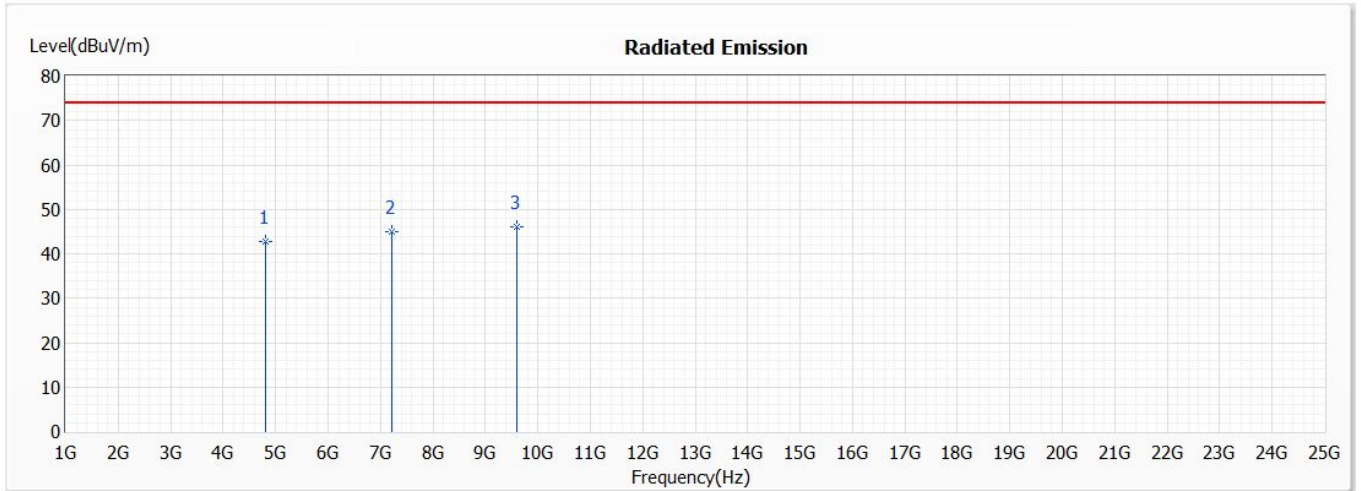


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4804.000	42.78	74.00	-31.22	42.29	0.49	PK
2	7206.000	44.86	74.00	-29.14	40.15	4.71	PK
* 3	9608.000	46.00	74.00	-28.00	39.15	6.85	PK

Remark:

1. "\*" means this data is the worst emission level;  
"!" means this data is over limit.
2. Emission Level=Reading Level + Correct Factor(Correct Factor=Ant Factor+ Cable Loss- Pre Amp).
3. Margin= Emission Level- Limit.

Model No	R04010	Site	966-3
Test Voltage	AC 120 V / 60 Hz	Test Date	2021/8/2
Test Mode	Mode 1: Transmit	Engineer	Nick Chen
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	BLE 1M,2.402GHz	Humidity (%RH)	62.3

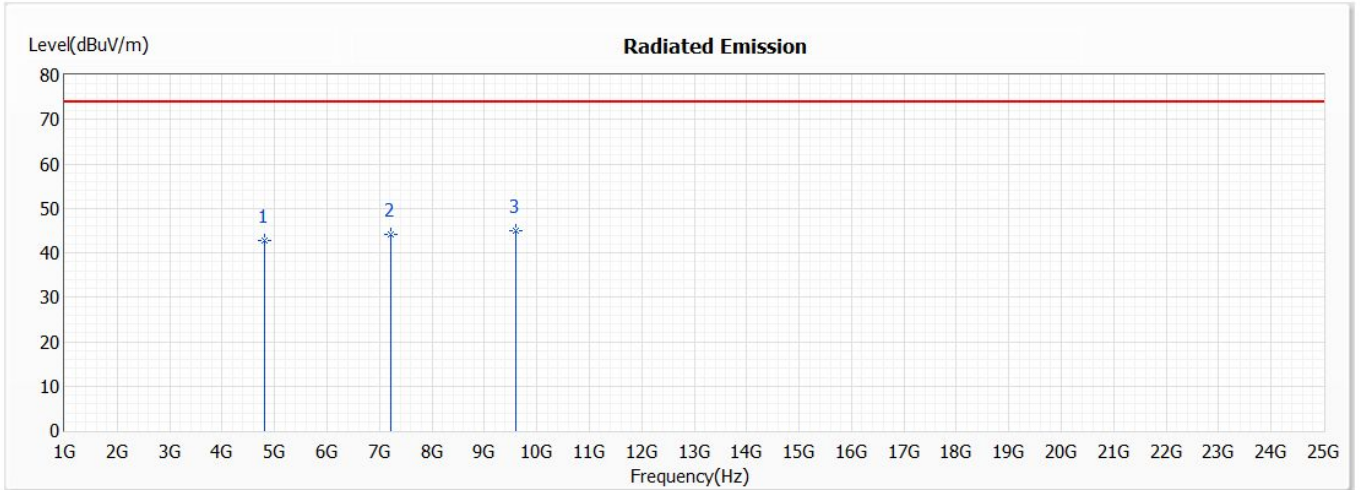


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4804.000	42.72	74.00	-31.28	42.23	0.49	PK
2	7206.000	44.27	74.00	-29.73	39.56	4.71	PK
* 3	9608.000	45.07	74.00	-28.93	38.22	6.85	PK

Remark:

- "\*" means this data is the worst emission level;  
"!" means this data is over limit.
- Emission Level=Reading Level + Correct Factor(Correct Factor=Ant Factor+ Cable Loss- Pre Amp).
- Margin= Emission Level- Limit.

Model No	R04010	Site	966-3
Test Voltage	AC 120 V / 60 Hz	Test Date	2021/8/2
Test Mode	Mode 1: Transmit	Engineer	Nick Chen
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	BLE 1M,2.44GHz	Humidity (%RH)	62.3

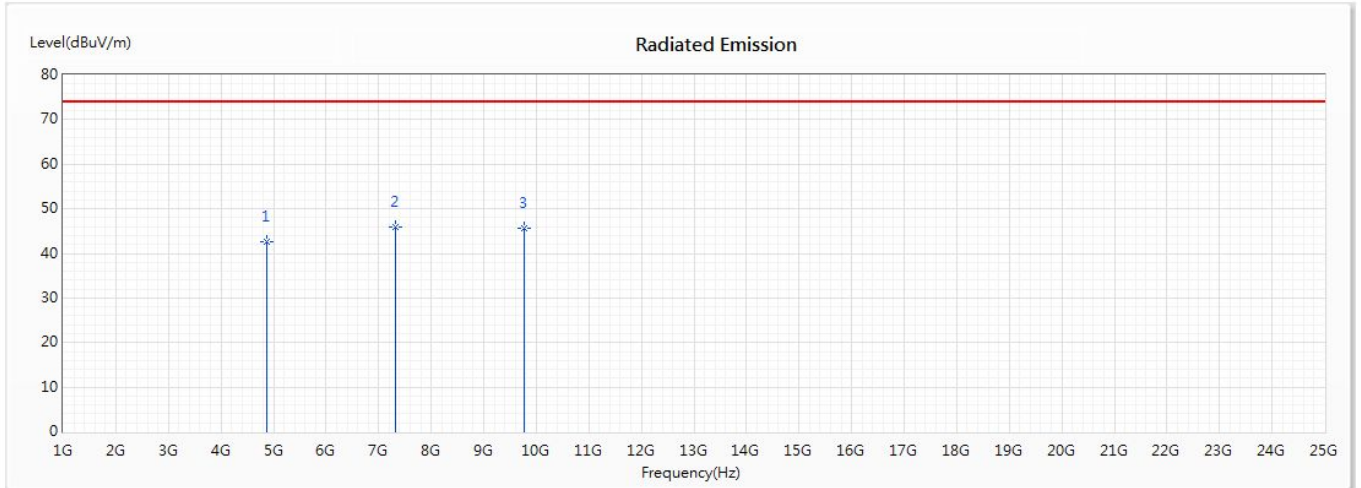


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4880.000	42.71	74.00	-31.29	42.11	0.60	PK
* 2	7320.000	45.82	74.00	-28.18	40.98	4.84	PK
3	9760.000	45.75	74.00	-28.25	38.53	7.22	PK

Remark:

- "\*" means this data is the worst emission level;  
"!" means this data is over limit.
- Emission Level=Reading Level + Correct Factor(Correct Factor=Ant Factor+ Cable Loss- Pre Amp).
- Margin= Emission Level- Limit.



Model No	R04010	Site	966-3
Test Voltage	AC 120 V / 60 Hz	Test Date	2021/8/2
Test Mode	Mode 1: Transmit	Engineer	Nick Chen
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	BLE 1M,2.44GHz	Humidity (%RH)	62.3

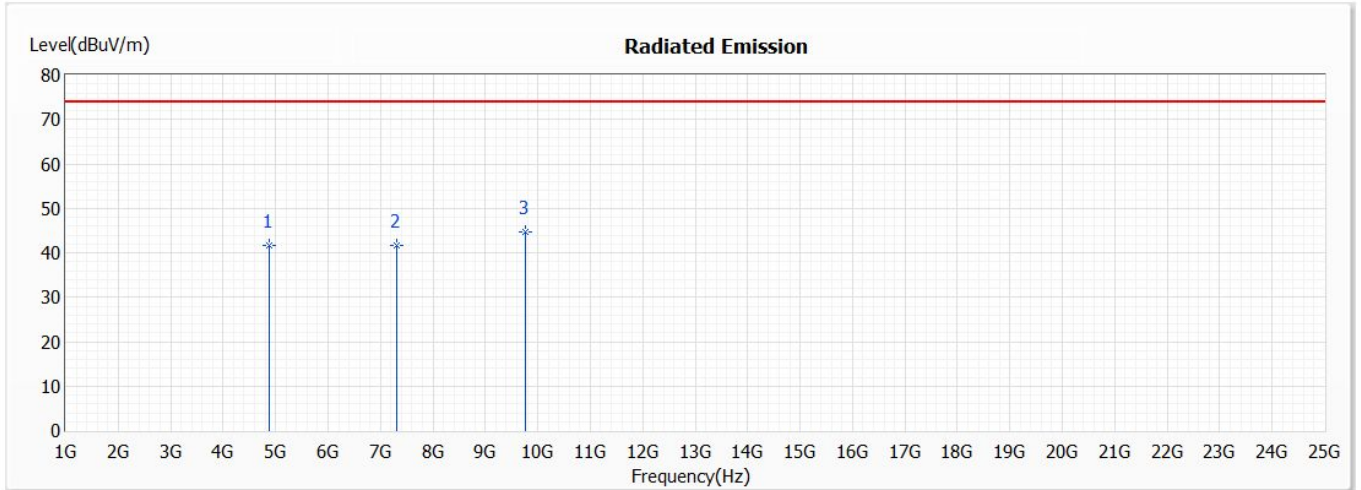


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4880.000	41.58	74.00	-32.42	40.98	0.60	PK
2	7320.000	41.58	74.00	-32.42	36.74	4.84	PK
* 3	9760.000	44.70	74.00	-29.30	37.48	7.22	PK

Remark:

- "\*" means this data is the worst emission level;  
"!" means this data is over limit.
- Emission Level=Reading Level + Correct Factor(Correct Factor=Ant Factor+ Cable Loss- Pre Amp).
- Margin= Emission Level- Limit.

Model No	R04010	Site	966-3
Test Voltage	AC 120 V / 60 Hz	Test Date	2021/8/2
Test Mode	Mode 1: Transmit	Engineer	Nick Chen
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	BLE 1M,2.48GHz	Humidity (%RH)	62.3

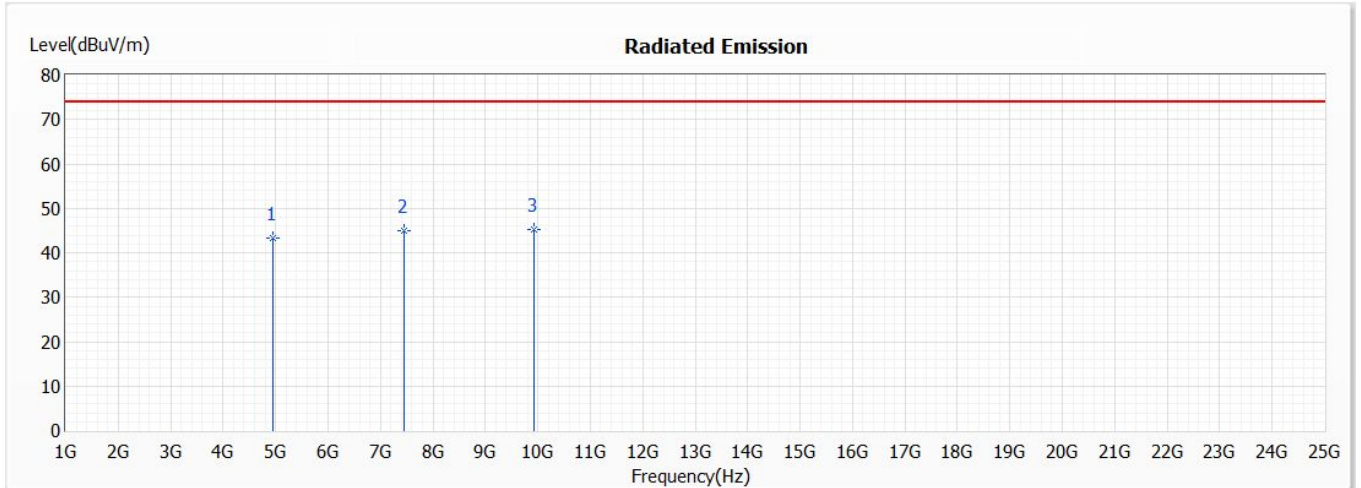


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4960.000	43.40	74.00	-30.60	42.70	0.70	PK
2	7440.000	45.01	74.00	-28.99	40.08	4.93	PK
* 3	9920.000	45.37	74.00	-28.63	37.97	7.40	PK

Remark:

- "\*" means this data is the worst emission level;  
"!" means this data is over limit.
- Emission Level=Reading Level + Correct Factor(Correct Factor=Ant Factor+ Cable Loss- Pre Amp).
- Margin= Emission Level- Limit.

Model No	R04010	Site	966-3
Test Voltage	AC 120 V / 60 Hz	Test Date	2021/8/2
Test Mode	Mode 1: Transmit	Engineer	Nick Chen
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	BLE 1M,2.48GHz	Humidity (%RH)	62.3

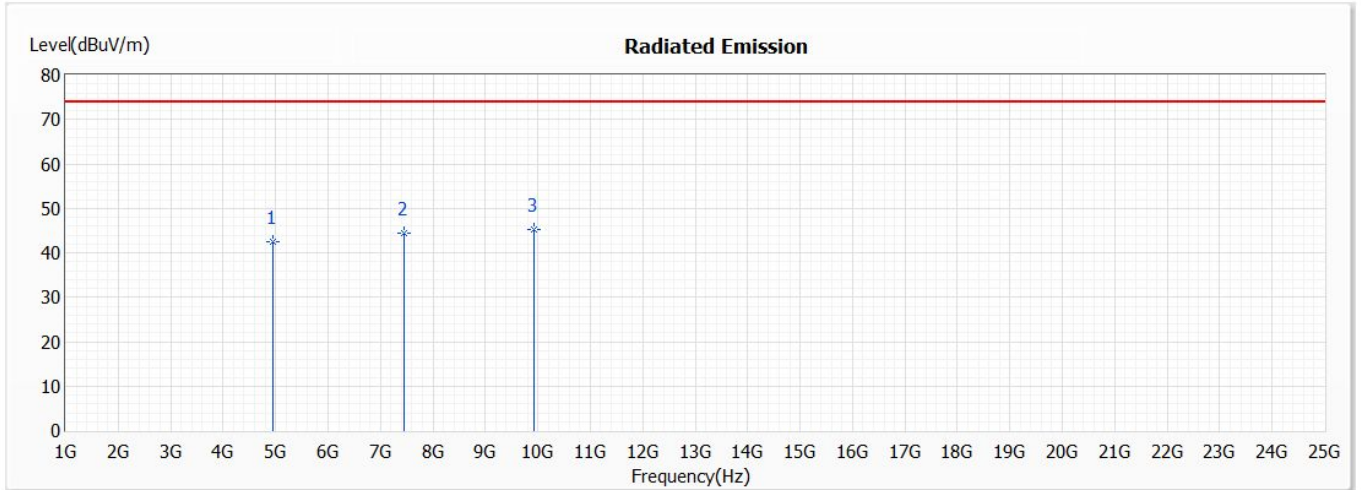


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4960.000	42.56	74.00	-31.44	41.86	0.70	PK
2	7440.000	44.39	74.00	-29.61	39.46	4.93	PK
* 3	9920.000	45.17	74.00	-28.83	37.77	7.40	PK

Remark:

- "\*" means this data is the worst emission level;  
"!" means this data is over limit.
- Emission Level=Reading Level + Correct Factor(Correct Factor=Ant Factor+ Cable Loss- Pre Amp).
- Margin= Emission Level- Limit.

Model No	R04010	Site	966-3
Test Voltage	AC 120 V / 60 Hz	Test Date	2021/8/26
Test Mode	Mode 1: Transmit	Engineer	Johnny Lee
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	BLE 2M,2.402GHz	Humidity (%RH)	62.3

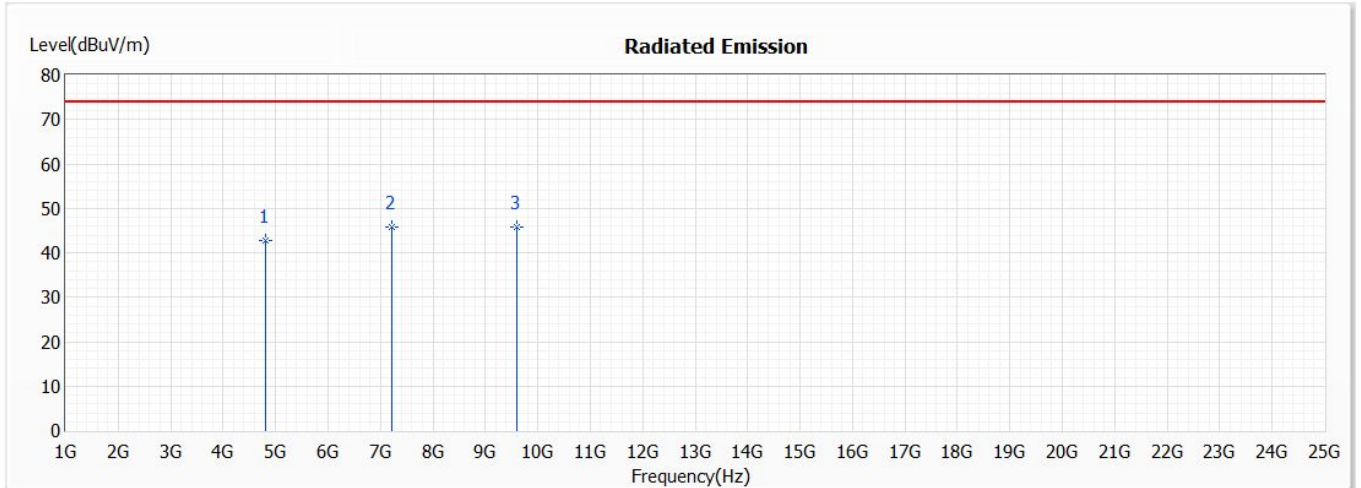


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4804.000	42.75	74.00	-31.25	42.26	0.49	PK
2	7206.000	45.80	74.00	-28.20	41.09	4.71	PK
* 3	9608.000	45.84	74.00	-28.16	38.99	6.85	PK

Remark:

- "\*" means this data is the worst emission level;  
"!" means this data is over limit.
- Emission Level=Reading Level + Correct Factor(Correct Factor=Ant Factor+ Cable Loss- Pre Amp).
- Margin= Emission Level- Limit.

Model No	R04010	Site	966-3
Test Voltage	AC 120 V / 60 Hz	Test Date	2021/8/26
Test Mode	Mode 1: Transmit	Engineer	Johnny Lee
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	BLE 2M,2.402GHz	Humidity (%RH)	62.3

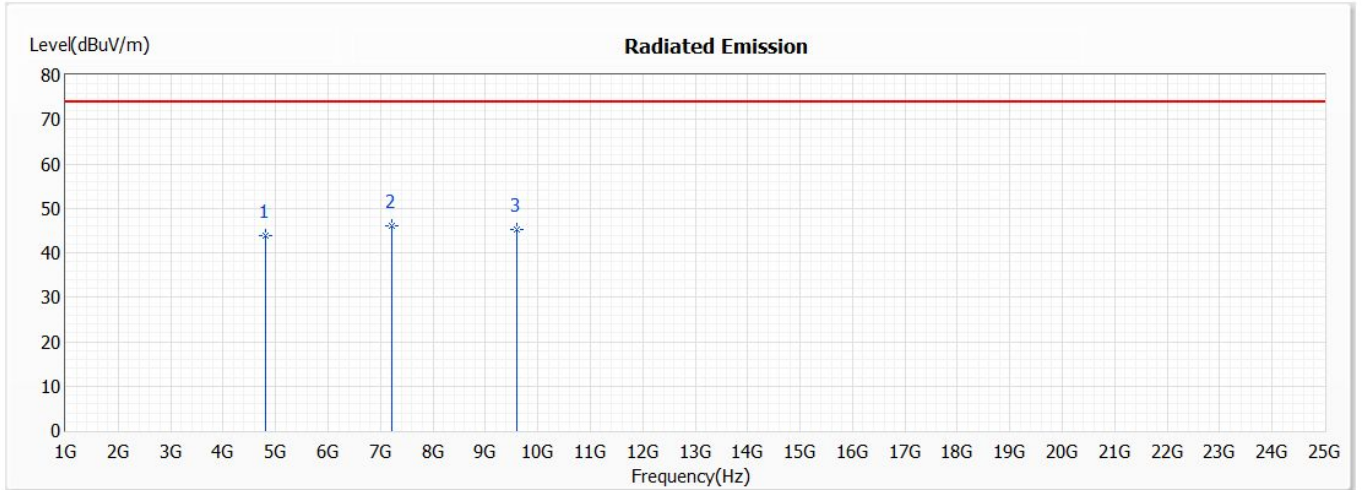


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4804.000	43.98	74.00	-30.02	43.49	0.49	PK
* 2	7206.000	46.11	74.00	-27.89	41.40	4.71	PK
3	9608.000	45.20	74.00	-28.80	38.35	6.85	PK

Remark:

1. "\*" means this data is the worst emission level;  
 "!" means this data is over limit.
2. Emission Level=Reading Level + Correct Factor(Correct Factor=Ant Factor+ Cable Loss- Pre Amp).
3. Margin= Emission Level- Limit.

Model No	R04010	Site	966-3
Test Voltage	AC 120 V / 60 Hz	Test Date	2021/8/26
Test Mode	Mode 1: Transmit	Engineer	Johnny Lee
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	BLE 2M,2.44GHz	Humidity (%RH)	62.3

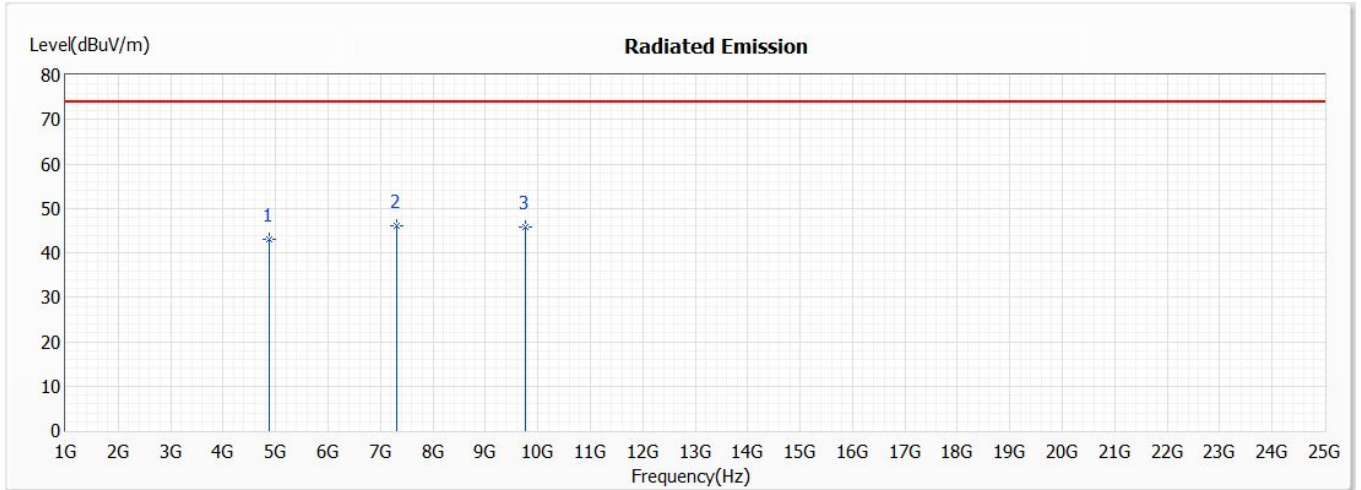


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4880.000	43.03	74.00	-30.97	42.43	0.60	PK
* 2	7320.000	46.17	74.00	-27.83	41.33	4.84	PK
3	9760.000	45.80	74.00	-28.20	38.58	7.22	PK

Remark:

- "\*" means this data is the worst emission level;  
"!" means this data is over limit.
- Emission Level=Reading Level + Correct Factor(Correct Factor=Ant Factor+ Cable Loss- Pre Amp).
- Margin= Emission Level- Limit.

Model No	R04010	Site	966-3
Test Voltage	AC 120 V / 60 Hz	Test Date	2021/8/26
Test Mode	Mode 1: Transmit	Engineer	Johnny Lee
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	BLE 2M,2.44GHz	Humidity (%RH)	62.3

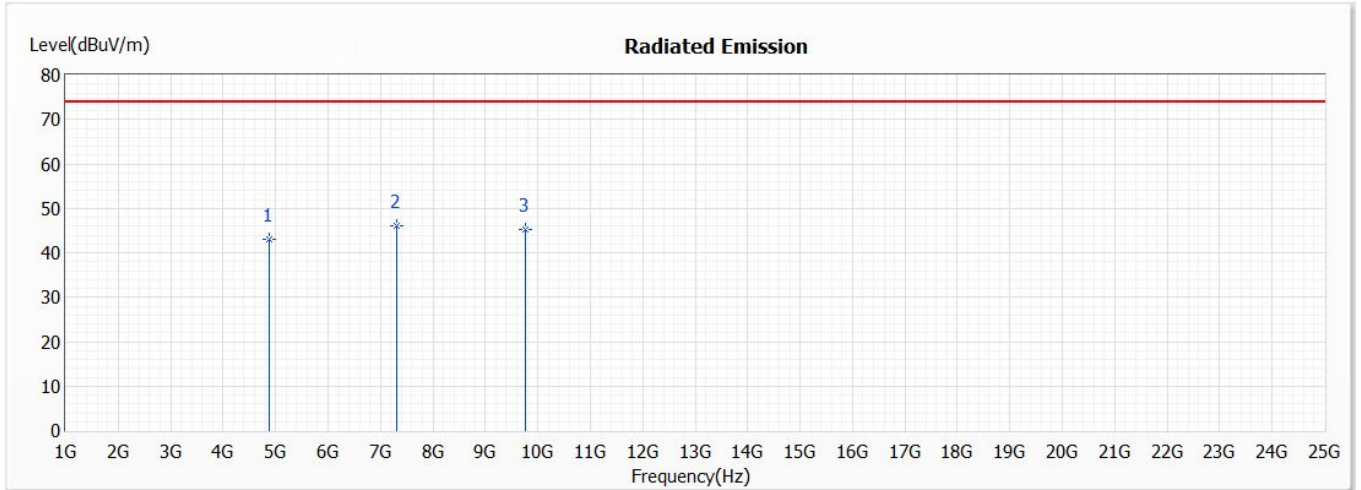


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4880.000	42.98	74.00	-31.02	42.38	0.60	PK
* 2	7320.000	46.15	74.00	-27.85	41.31	4.84	PK
3	9760.000	45.33	74.00	-28.67	38.11	7.22	PK

Remark:

- "\*" means this data is the worst emission level;  
"!" means this data is over limit.
- Emission Level=Reading Level + Correct Factor(Correct Factor=Ant Factor+ Cable Loss- Pre Amp).
- Margin= Emission Level- Limit.

Model No	R04010	Site	966-3
Test Voltage	AC 120 V / 60 Hz	Test Date	2021/8/26
Test Mode	Mode 1: Transmit	Engineer	Johnny Lee
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	BLE 2M,2.48GHz	Humidity (%RH)	62.3

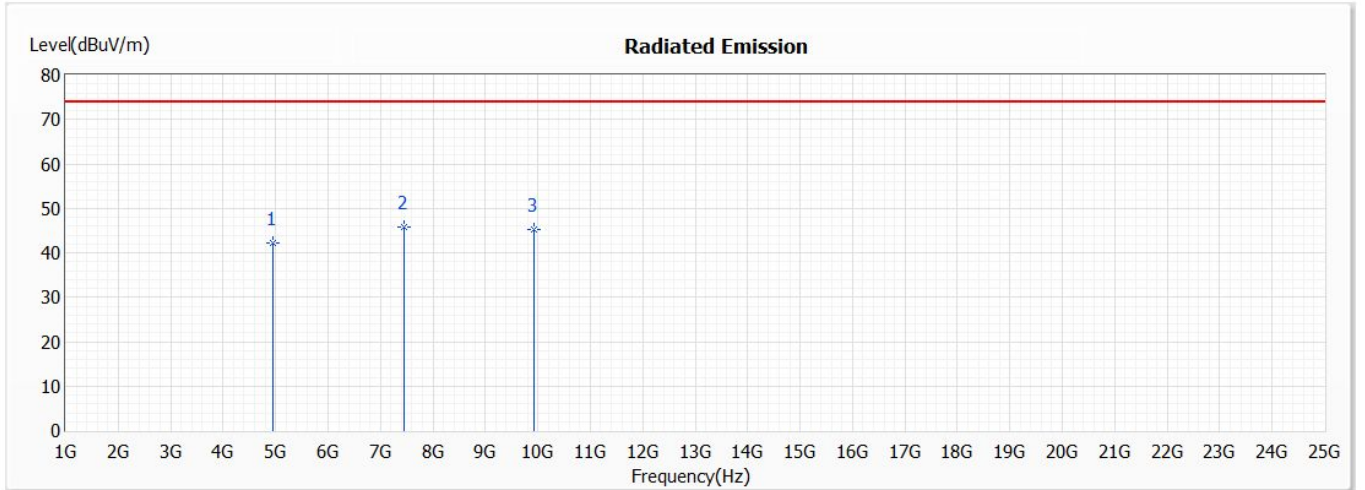


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4960.000	42.18	74.00	-31.82	41.48	0.70	PK
* 2	7440.000	45.82	74.00	-28.18	40.89	4.93	PK
3	9920.000	45.37	74.00	-28.63	37.97	7.40	PK

Remark:

- "\*" means this data is the worst emission level;  
"!" means this data is over limit.
- Emission Level=Reading Level + Correct Factor(Correct Factor=Ant Factor+ Cable Loss- Pre Amp).
- Margin= Emission Level- Limit.



Model No	R04010	Site	966-3
Test Voltage	AC 120 V / 60 Hz	Test Date	2021/8/26
Test Mode	Mode 1: Transmit	Engineer	Johnny Lee
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	BLE 2M,2.48GHz	Humidity (%RH)	62.3

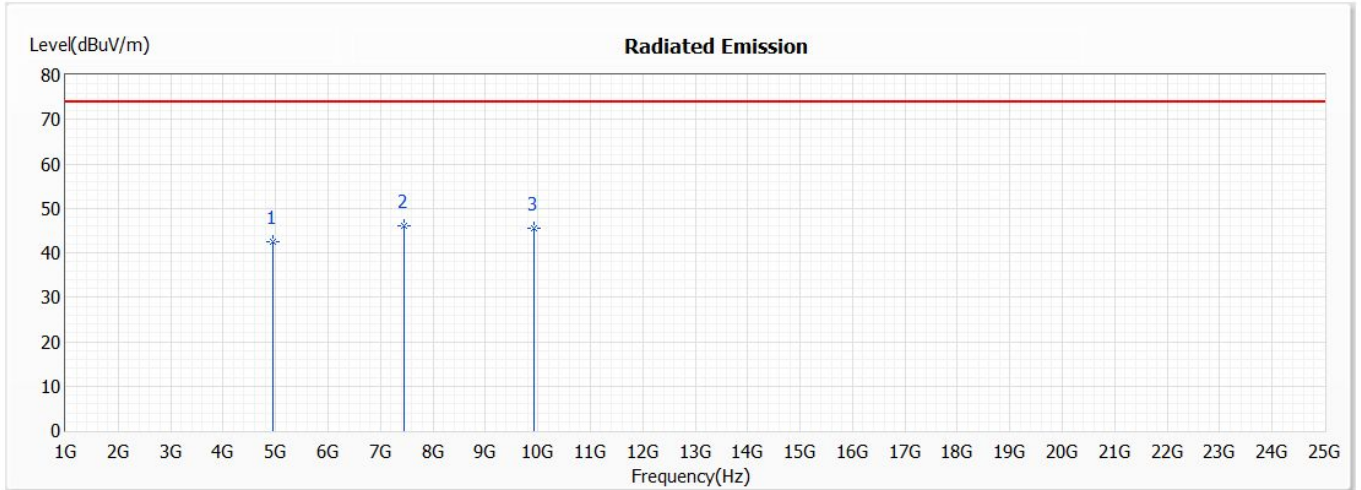


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4960.000	42.35	74.00	-31.65	41.65	0.70	PK
* 2	7440.000	45.99	74.00	-28.01	41.06	4.93	PK
3	9920.000	45.56	74.00	-28.44	38.16	7.40	PK

Remark:

- "\*" means this data is the worst emission level;  
"!" means this data is over limit.
- Emission Level=Reading Level + Correct Factor(Correct Factor=Ant Factor+ Cable Loss- Pre Amp).
- Margin= Emission Level- Limit.

Model No	R04010	Site	966-3
Test Voltage	AC 120 V / 60 Hz	Test Date	2021/8/2
Test Mode	Mode 1: Transmit	Engineer	Nick Chen
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	BLE 1M,2.44GHz	Humidity (%RH)	62.3

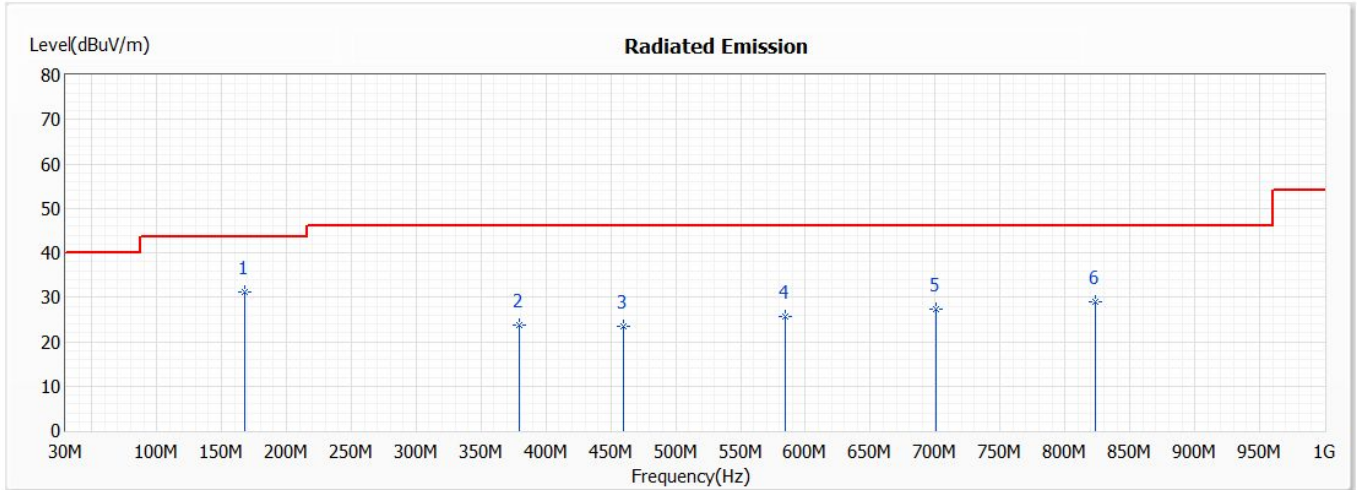


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	167.740	31.19	43.50	-12.31	41.65	-10.46	QP
2	379.200	23.68	46.00	-22.32	31.41	-7.73	QP
3	459.710	23.37	46.00	-22.63	29.35	-5.98	QP
4	584.840	25.78	46.00	-20.22	29.36	-3.58	QP
5	700.270	27.40	46.00	-18.60	29.24	-1.84	QP
6	823.460	28.99	46.00	-17.01	29.13	-0.14	QP

Remark:

- "\*" means this data is the worst emission level;  
"!" means this data is over limit.
- Emission Level=Reading Level + Correct Factor(Correct Factor=Ant Factor+ Cable Loss- Pre Amp).
- Margin= Emission Level- Limit.

Model No	R04010	Site	966-3
Test Voltage	AC 120 V / 60 Hz	Test Date	2021/8/2
Test Mode	Mode 1: Transmit	Engineer	Nick Chen
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	BLE 1M,2.44GHz	Humidity (%RH)	62.3

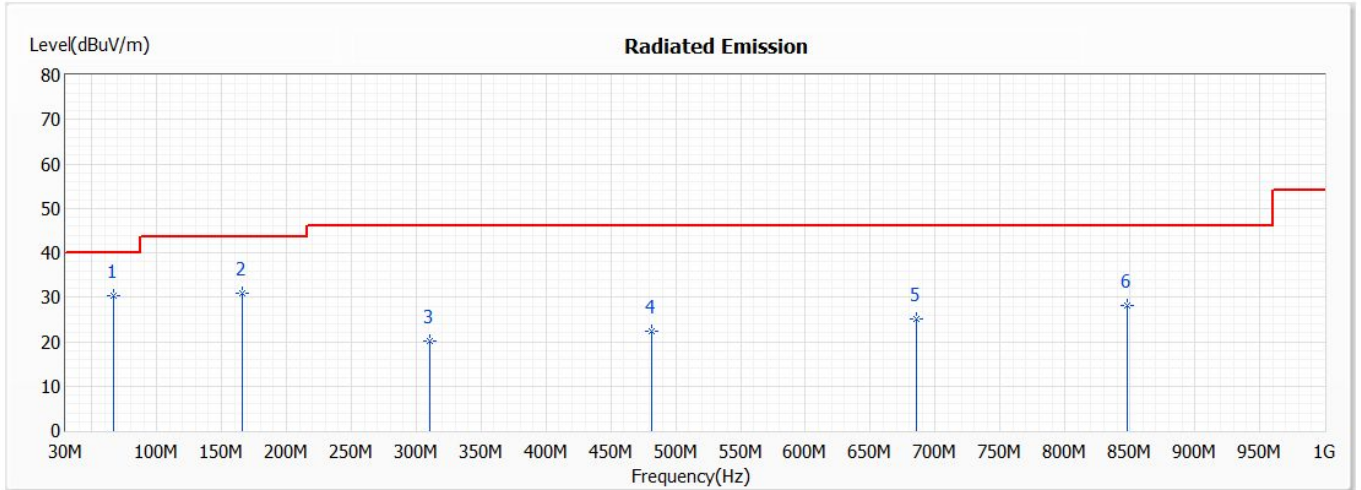


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	66.860	30.38	40.00	-9.62	43.24	-12.86	QP
2	165.800	30.78	43.50	-12.72	41.26	-10.48	QP
3	310.330	20.27	46.00	-25.73	29.77	-9.50	QP
4	481.050	22.30	46.00	-23.70	27.87	-5.57	QP
5	685.720	25.03	46.00	-20.97	27.03	-2.00	QP
6	847.710	28.21	46.00	-17.79	27.92	0.29	QP

Remark:

- "\*" means this data is the worst emission level;  
"!" means this data is over limit.
- Emission Level=Reading Level + Correct Factor(Correct Factor=Ant Factor+ Cable Loss- Pre Amp).
- Margin= Emission Level- Limit.

Model No	R04010	Site	966-3
Test Voltage	AC 120 V / 60 Hz	Test Date	2021/8/26
Test Mode	Mode 1: Transmit	Engineer	Nick Chen
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	BLE 2M,2.44GHz	Humidity (%RH)	62.3

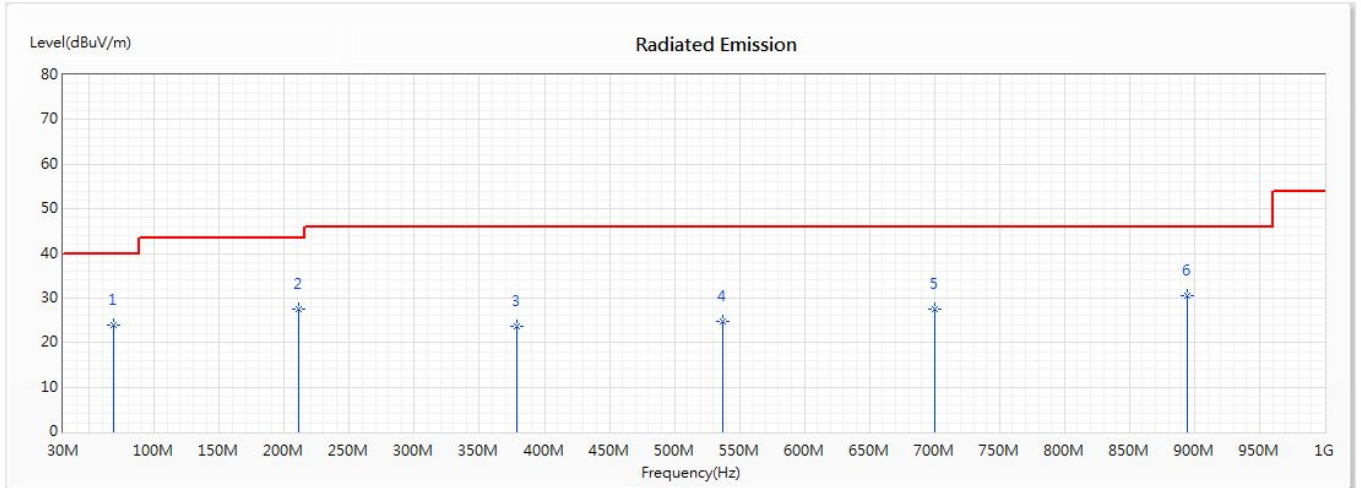


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	68.800	23.99	40.00	-16.01	37.19	-13.20	QP
2	211.390	27.55	43.50	-15.95	40.69	-13.14	QP
3	379.200	23.68	46.00	-22.32	31.41	-7.73	QP
4	537.310	24.68	46.00	-21.32	29.08	-4.40	QP
5	700.270	27.40	46.00	-18.60	29.24	-1.84	QP
* 6	894.270	30.49	46.00	-15.51	29.69	0.80	QP

Remark:

1. "\*" means this data is the worst emission level;  
"!" means this data is over limit.
2. Emission Level=Reading Level + Correct Factor(Correct Factor=Ant Factor+ Cable Loss- Pre Amp).
3. Margin= Emission Level- Limit.

Model No	R04010	Site	966-3
Test Voltage	AC 120 V / 60 Hz	Test Date	2021/8/26
Test Mode	Mode 1: Transmit	Engineer	Nick Chen
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	BLE 2M,2.44GHz	Humidity (%RH)	62.3

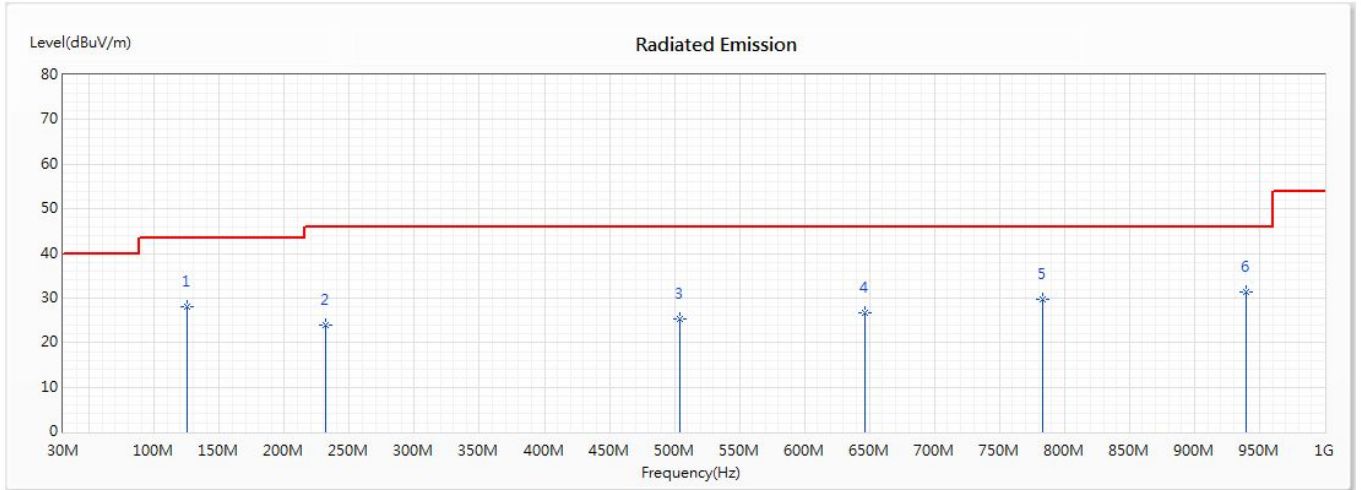

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	125.060	27.92	43.50	-15.58	40.67	-12.75	QP
2	231.760	23.93	46.00	-22.07	35.75	-11.82	QP
3	504.330	25.38	46.00	-20.62	30.53	-5.15	QP
4	646.920	26.65	46.00	-19.35	29.17	-2.52	QP
5	782.720	29.68	46.00	-16.32	30.00	-0.32	QP
* 6	939.860	31.21	46.00	-14.79	29.68	1.53	QP


Remark:

- "\*" means this data is the worst emission level;  
"!" means this data is over limit.
- Emission Level=Reading Level + Correct Factor(Correct Factor=Ant Factor+ Cable Loss- Pre Amp).
- Margin= Emission Level- Limit.

Test Result of Radiated Emission	<b>PASS</b>
----------------------------------	-------------

## 5. RF Antenna Conducted Test

### 5.1. Test Setup

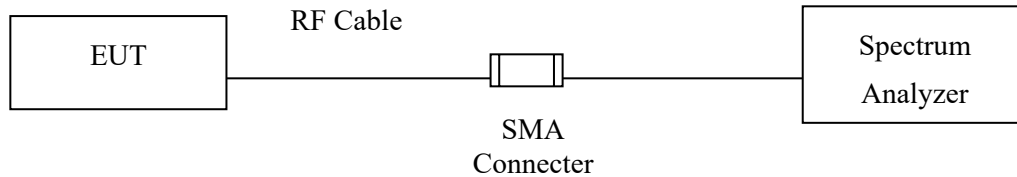

### 5.2. Limits

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

### 5.3. Test Procedure


The EUT was tested according to C63.10:2013 Section 11.11 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 100 kHz, Set VBW > RBW, scan up through 10th harmonic.


### 5.4. Test Result of RF Antenna Conducted Test

Product : DIGITAL CAMERA  
 Test Item : RF Antenna Conducted Test  
 Test Mode : Mode 1: Transmit - BLE 1Mbps  
 Test Date : 2021/08/06


**Figure Channel 00:**

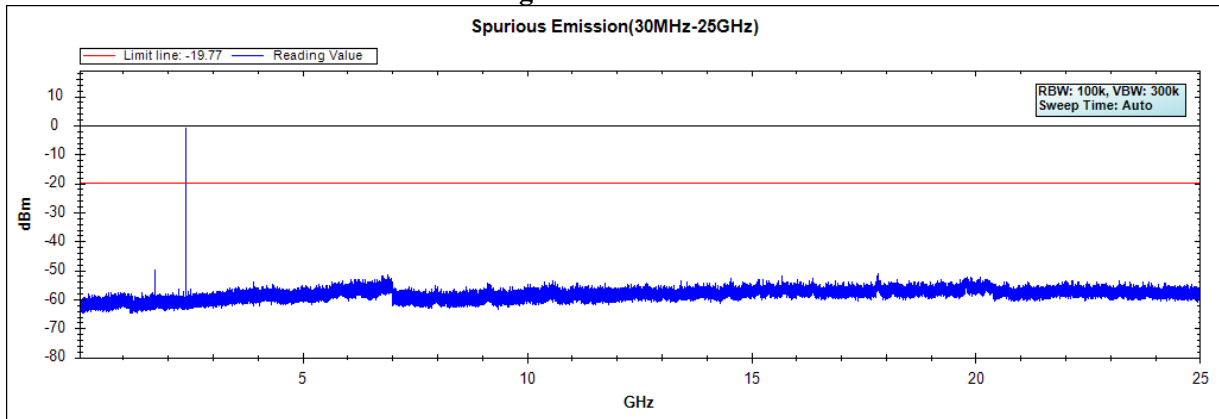

**Figure Channel 19:**

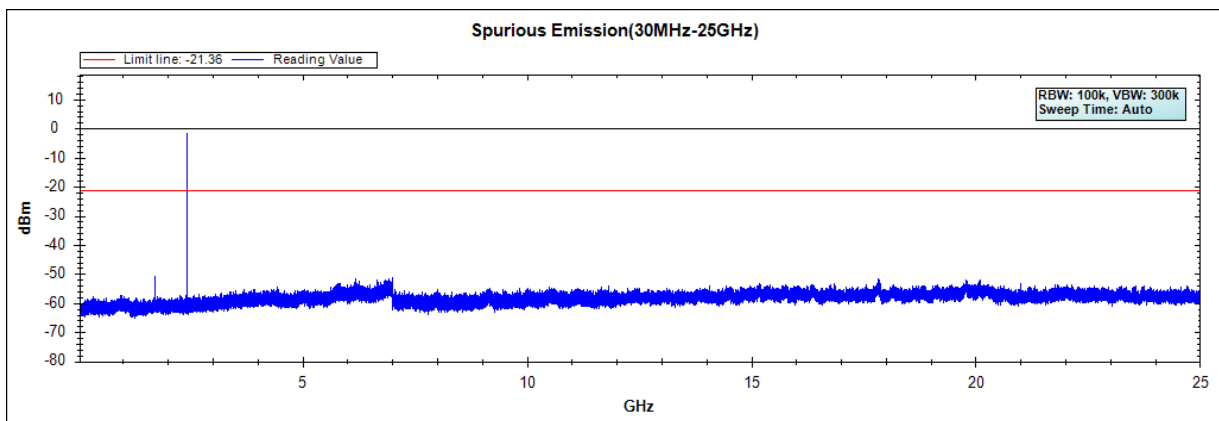

**Figure Channel 39:**

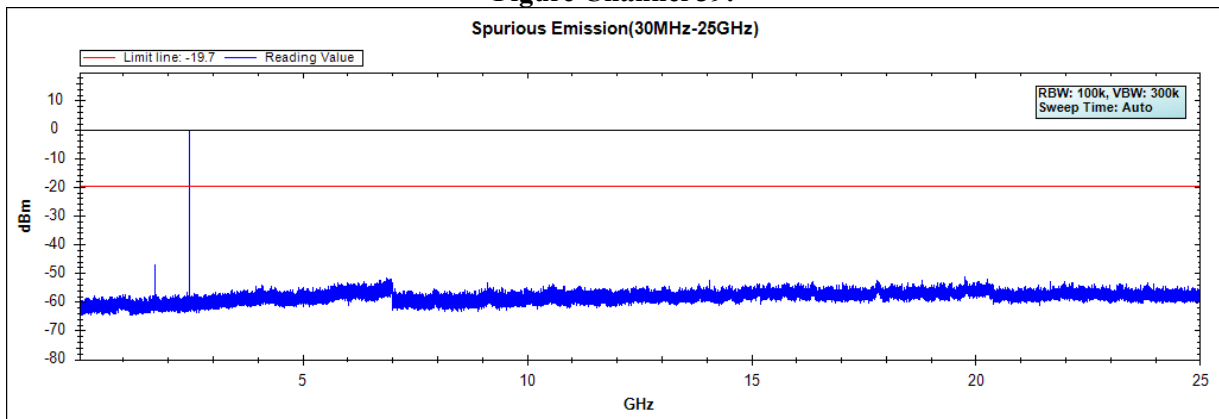


Note: The above test pattern is synthesized by multiple of the frequency range.


Test Result of RF Antenna Conducted Test	<b>PASS</b>
--	-------------

Product : DIGITAL CAMERA  
 Test Item : RF Antenna Conducted Test  
 Test Mode : Mode 1: Transmit - BLE 2Mbps  
 Test Date : 2021/08/06


**Figure Channel 00:**

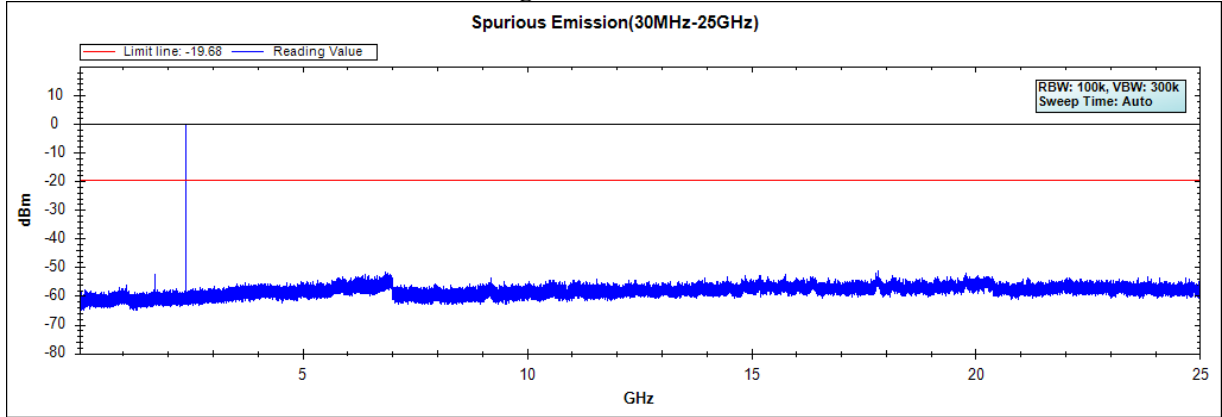

**Figure Channel 19:**

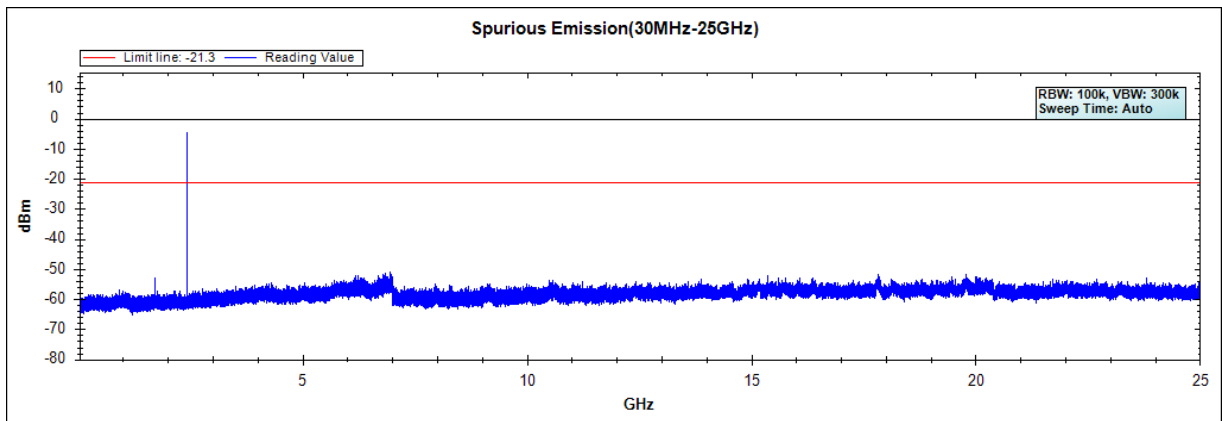

**Figure Channel 39:**

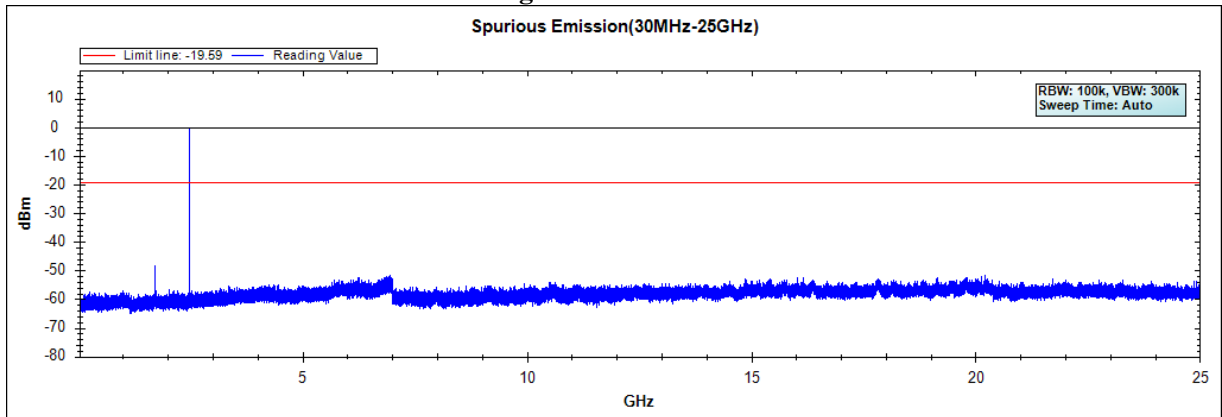

Note: The above test pattern is synthesized by multiple of the frequency range.


Test Result of RF Antenna Conducted Test	<b>PASS</b>
--	-------------




## 6. Band Edge

### 6.1. Test Setup

#### RF Conducted Measurement

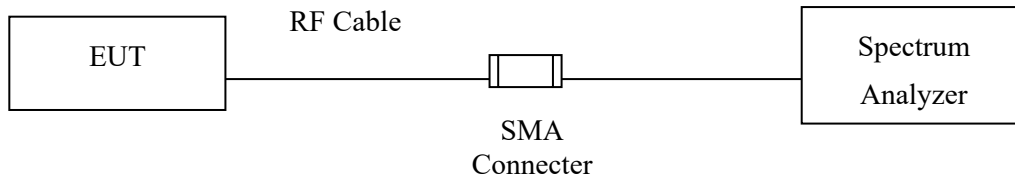

#### RF Radiated Measurement:

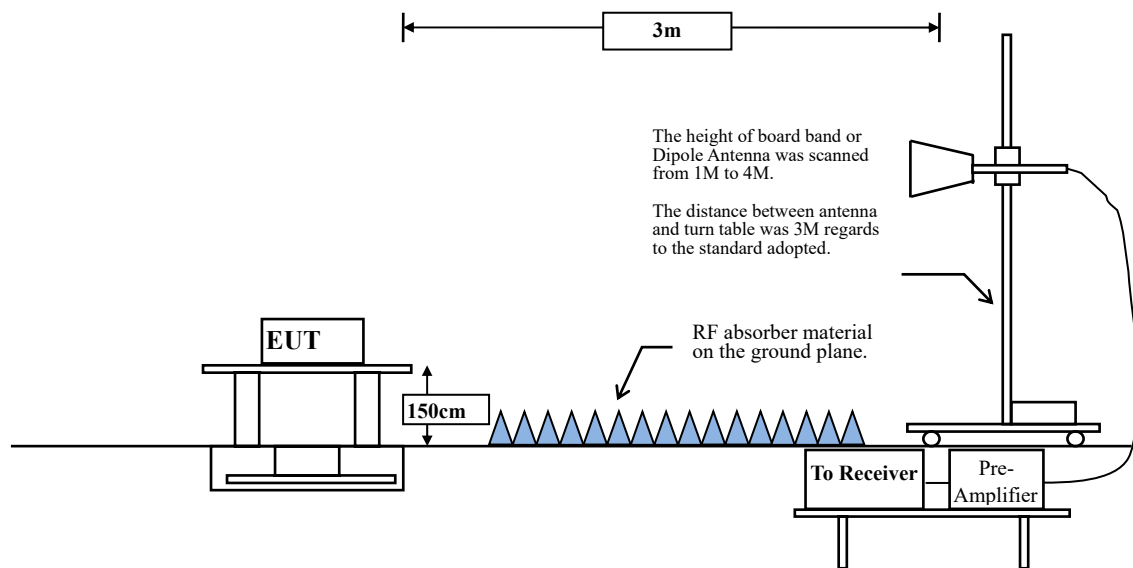

## 6.2. Limit

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

## 6.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested according to C63.10:2013 Section 11.12.1 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.

**RBW and VBW Parameter setting:**

According to C63.10 Section 11.12.2.4 Peak measurement procedure.

RBW = as specified in Table 1.

$VBW \geq 3 \times RBW$ .

**Table 1 —RBW as a function of frequency**

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

According to C63.10 Section 11.12.2.5 Average measurement procedure.

RBW = 1MHz.

VBW = 10Hz, when duty cycle  $\geq 98\%$

$VBW \geq 1/T$ , when duty cycle  $< 98\%$


( T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)

2.4GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
BLE 1Mbps	62.40	0.3900	2564	3000
BLE 2Mbps	32.91	0.2060	4854	5000

Note: Duty Cycle Refer to Section 9.

### 6.4. Test Result of Band Edge

Model No	R04010	Site	966-3
Test Voltage	AC 120 V / 60 Hz	Test Date	2021/7/29
Test Mode	Mode 1: Transmit	Engineer	Nick Chen
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	BLE 1M,2.402GHz	Humidity (%RH)	62.3

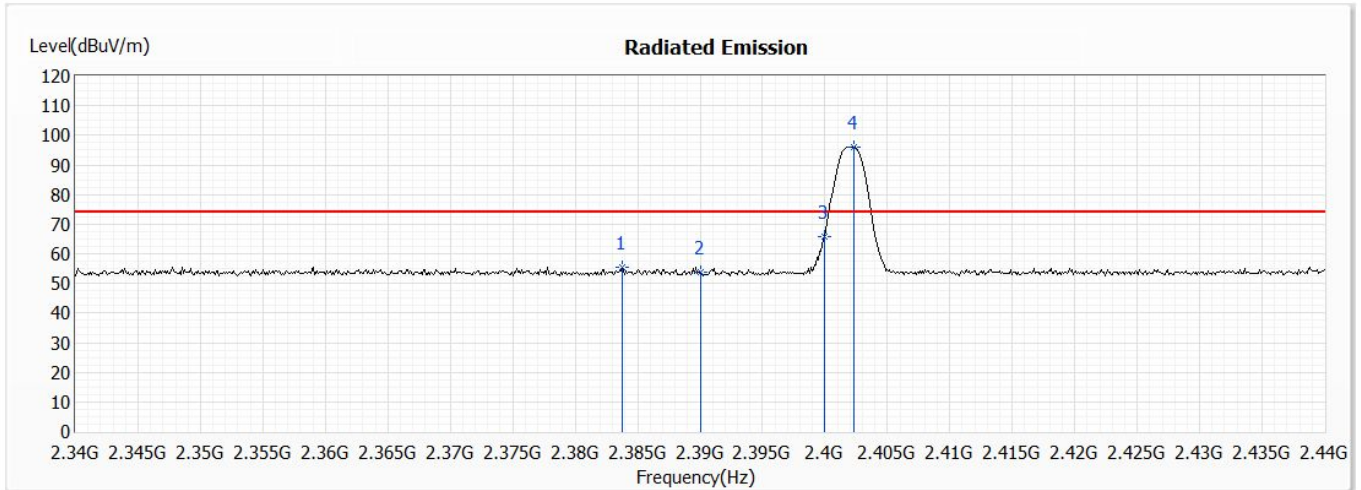


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2383.800	55.29	74.00	-18.71	42.11	13.18	PK
2	2390.000	53.91	74.00	-20.09	40.72	13.19	PK
3	2400.000	65.61	--	--	52.41	13.20	PK
!4	2402.300	95.98	--	--	82.78	13.20	PK

Remark:

1. "\*" means this data is the worst emission level;  
"!" means this data is over limit.
2. Emission Level=Reading Level + Correct Factor(Correct Factor=Ant Factor+ Cable Loss- Pre Amp).
3. Margin= Emission Level- Limit.

Model No	R04010	Site	966-3
Test Voltage	AC 120 V / 60 Hz	Test Date	2021/7/29
Test Mode	Mode 1: Transmit	Engineer	Nick Chen
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	BLE 1M,2.402GHz	Humidity (%RH)	62.3

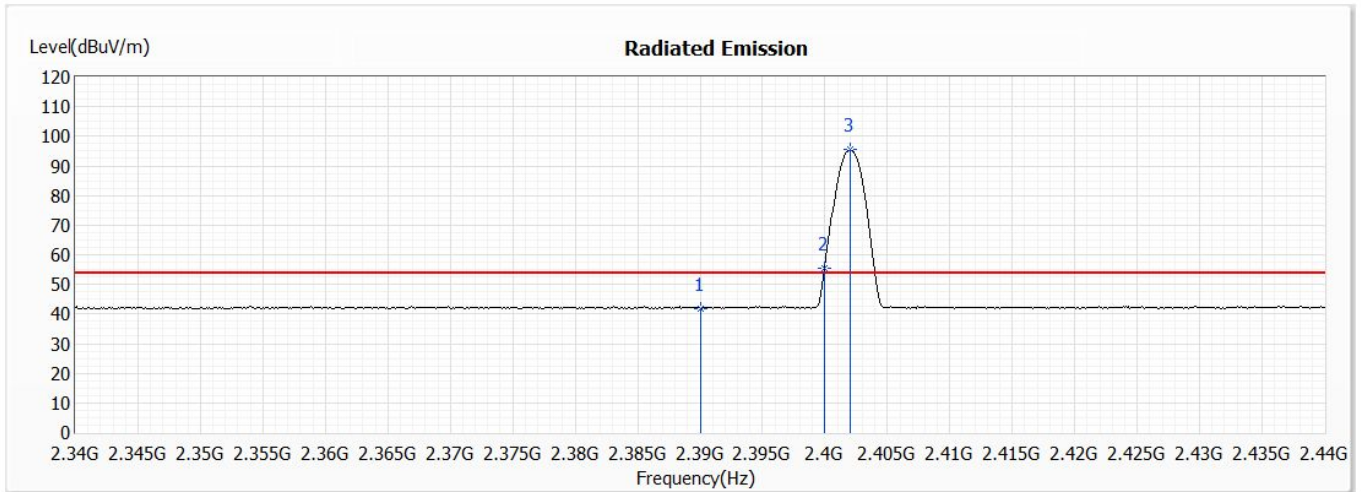


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2390.000	41.99	54.00	-12.01	28.80	13.19	AV
! 2	2400.000	55.40	--	--	42.20	13.20	AV
! 3	2402.000	95.38	--	--	82.18	13.20	AV

Remark:

1. "\*" means this data is the worst emission level;  
"!" means this data is over limit.
2. Emission Level=Reading Level + Correct Factor(Correct Factor=Ant Factor+ Cable Loss- Pre Amp).
3. Margin= Emission Level- Limit.

Model No	R04010	Site	966-3
Test Voltage	AC 120 V / 60 Hz	Test Date	2021/7/29
Test Mode	Mode 1: Transmit	Engineer	Nick Chen
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	BLE 1M,2.402GHz	Humidity (%RH)	62.3

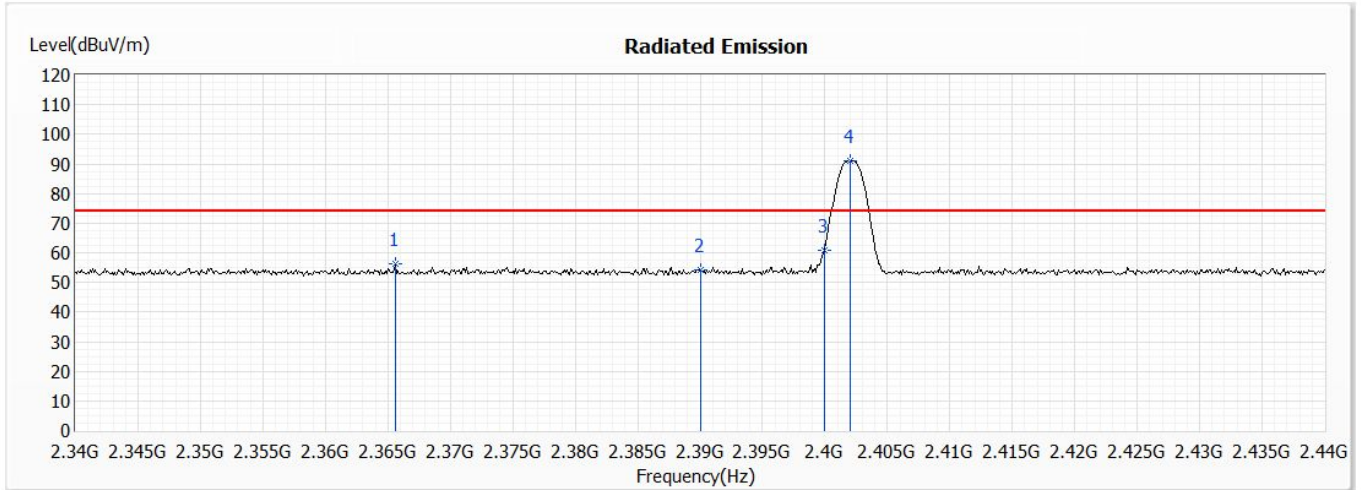


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2365.600	56.07	74.00	-17.93	42.91	13.16	PK
2	2390.000	54.36	74.00	-19.64	41.17	13.19	PK
3	2400.000	60.83	--	--	47.63	13.20	PK
!4	2402.000	90.87	--	--	77.67	13.20	PK

Remark:

1. "\*" means this data is the worst emission level;  
 "!" means this data is over limit.
2. Emission Level=Reading Level + Correct Factor(Correct Factor=Ant Factor+ Cable Loss- Pre Amp).
3. Margin= Emission Level- Limit.

Model No	R04010	Site	966-3
Test Voltage	AC 120 V / 60 Hz	Test Date	2021/7/29
Test Mode	Mode 1: Transmit	Engineer	Nick Chen
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	BLE 1M,2.402GHz	Humidity (%RH)	62.3

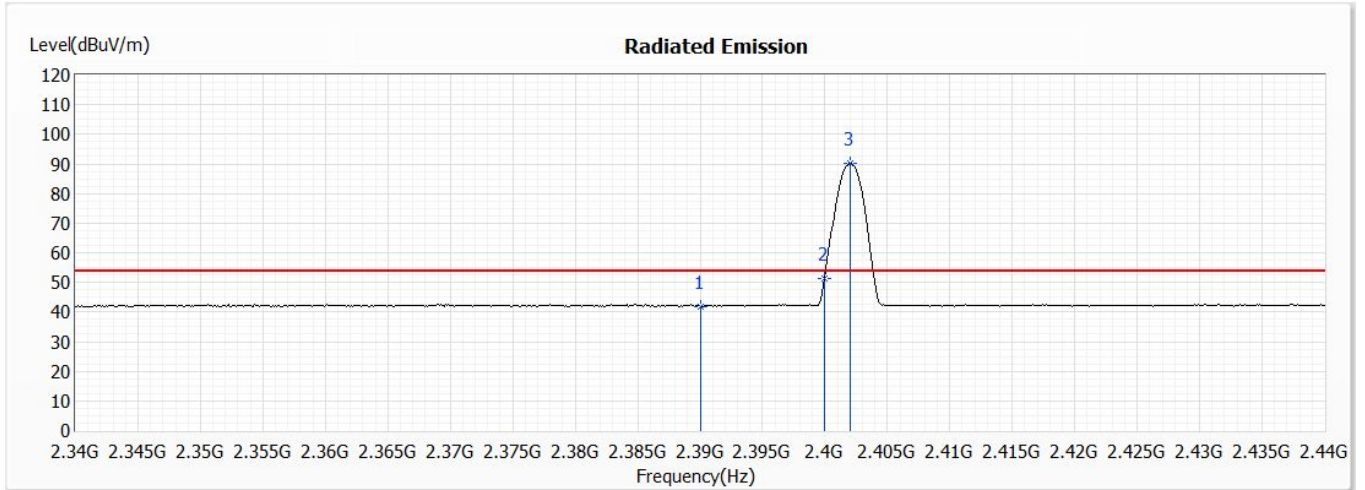


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2390.000	41.97	54.00	-12.03	28.78	13.19	AV
2	2400.000	51.47	--	--	38.27	13.20	AV
! 3	2402.000	90.20	--	--	77.00	13.20	AV

Remark:

1. "\*" means this data is the worst emission level;  
"!" means this data is over limit.
2. Emission Level=Reading Level + Correct Factor(Correct Factor=Ant Factor+ Cable Loss- Pre Amp).
3. Margin= Emission Level- Limit.

Model No	R04010	Site	966-3
Test Voltage	AC 120 V / 60 Hz	Test Date	2021/7/29
Test Mode	Mode 1: Transmit	Engineer	Nick Chen
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	BLE 1M,2.48GHz	Humidity (%RH)	62.3

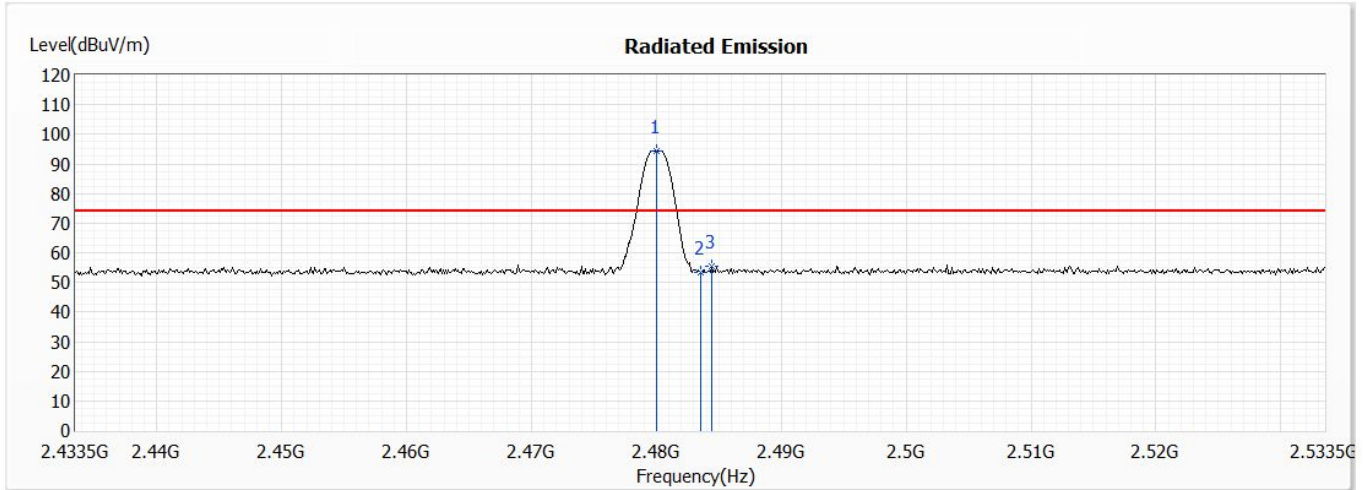


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2480.000	94.44	--	--	81.23	13.21	PK
2	2483.500	53.37	74.00	-20.63	40.16	13.21	PK
3	2484.400	55.51	74.00	-18.49	42.30	13.21	PK

Remark:

- "\*" means this data is the worst emission level;  
"!" means this data is over limit.
- Emission Level=Reading Level + Correct Factor(Correct Factor=Ant Factor+ Cable Loss- Pre Amp).
- Margin= Emission Level- Limit.



Model No	R04010	Site	966-3
Test Voltage	AC 120 V / 60 Hz	Test Date	2021/7/29
Test Mode	Mode 1: Transmit	Engineer	Nick Chen
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	BLE 1M,2.48GHz	Humidity (%RH)	62.3

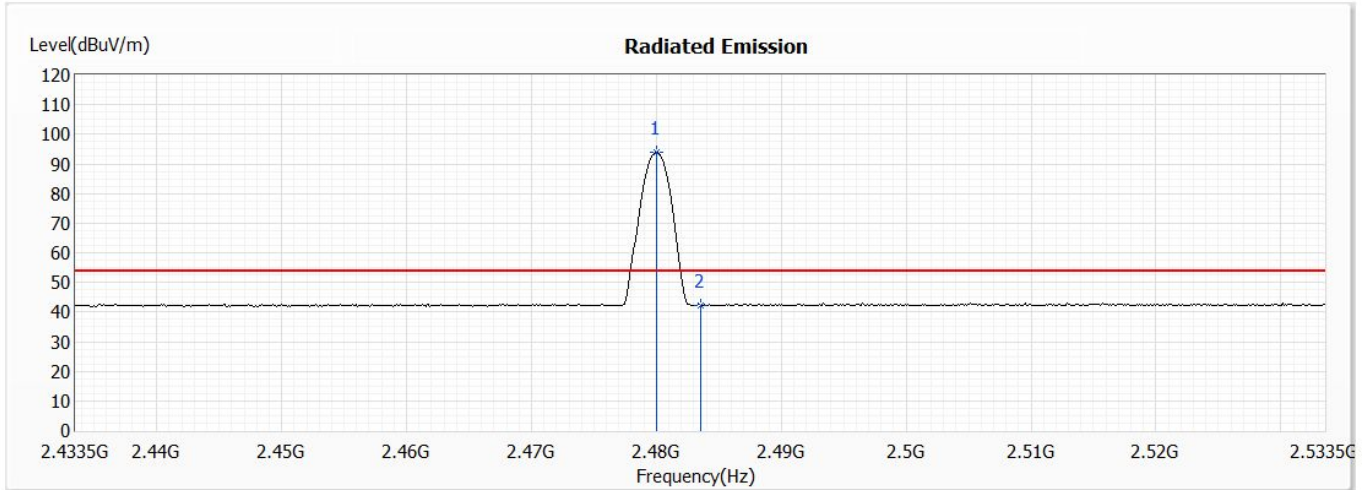


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2480.000	93.81	--	--	80.60	13.21	AV
2	2483.500	42.40	54.00	-11.60	29.19	13.21	AV

Remark:

- "\*" means this data is the worst emission level;  
"!" means this data is over limit.
- Emission Level=Reading Level + Correct Factor(Correct Factor=Ant Factor+ Cable Loss- Pre Amp).
- Margin= Emission Level- Limit.

Model No	R04010	Site	966-3
Test Voltage	AC 120 V / 60 Hz	Test Date	2021/7/29
Test Mode	Mode 1: Transmit	Engineer	Nick Chen
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	BLE 1M,2.48GHz	Humidity (%RH)	62.3

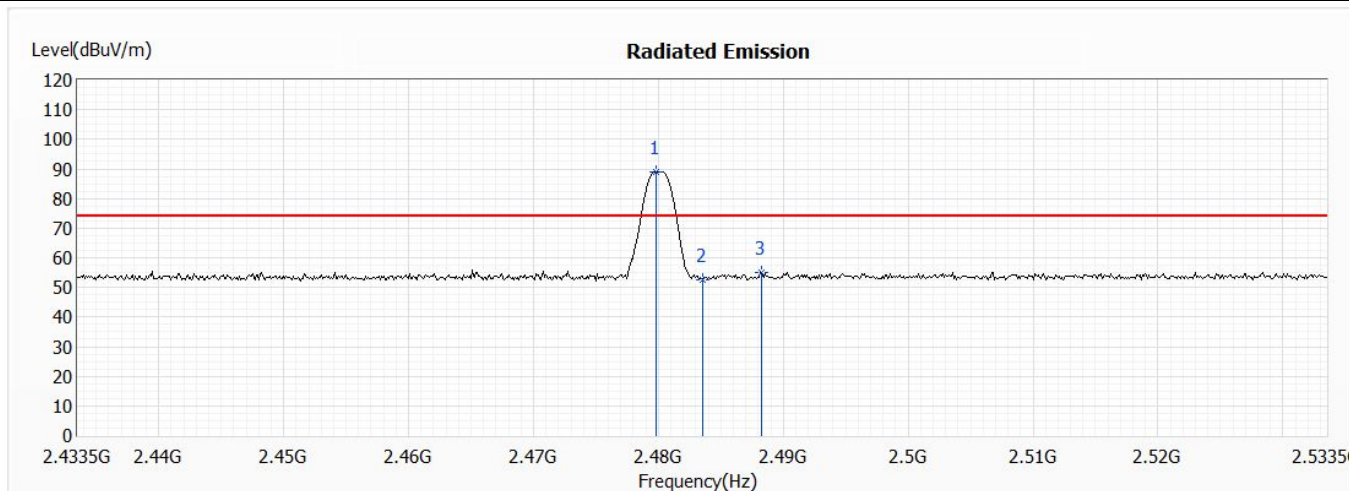


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2479.800	89.16	--	--	75.95	13.21	PK
2	2483.500	52.66	74.00	-21.34	39.45	13.21	PK
3	2488.300	55.02	74.00	-18.98	41.80	13.22	PK

Remark:

- "\*" means this data is the worst emission level;  
"!" means this data is over limit.
- Emission Level=Reading Level + Correct Factor(Correct Factor=Ant Factor+ Cable Loss- Pre Amp).
- Margin= Emission Level- Limit.

Model No	R04010	Site	966-3
Test Voltage	AC 120 V / 60 Hz	Test Date	2021/7/29
Test Mode	Mode 1: Transmit	Engineer	Nick Chen
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	BLE 1M,2.48GHz	Humidity (%RH)	62.3

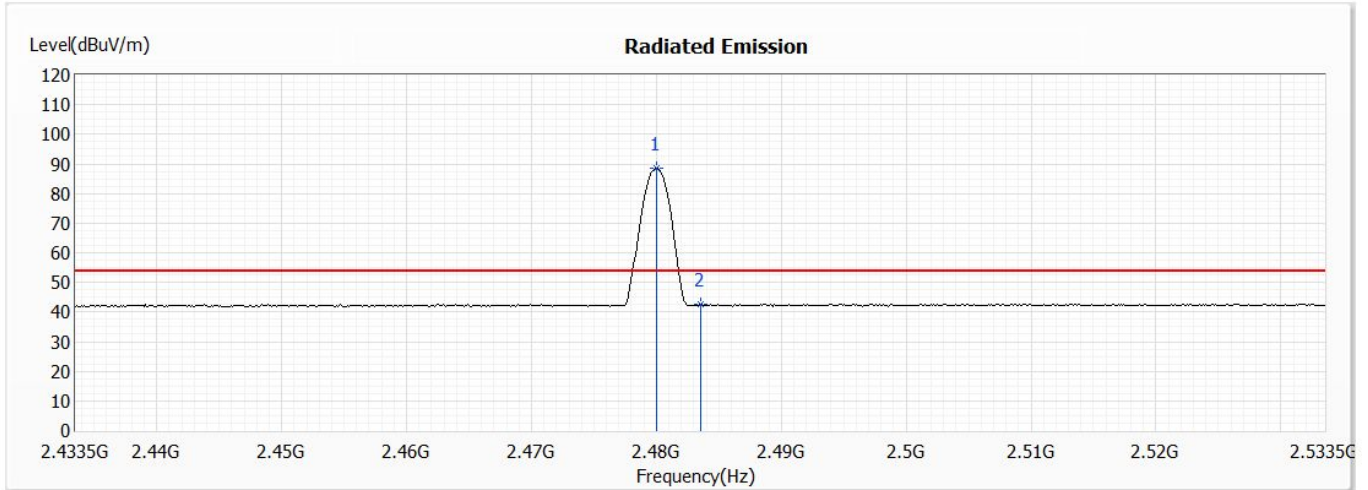


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2480.000	88.45	--	--	75.24	13.21	AV
2	2483.500	42.54	54.00	-11.46	29.33	13.21	AV

Remark:

- "\*" means this data is the worst emission level;  
"!" means this data is over limit.
- Emission Level=Reading Level + Correct Factor(Correct Factor=Ant Factor+ Cable Loss- Pre Amp).
- Margin= Emission Level- Limit.

Model No	R04010	Site	966-3
Test Voltage	AC 120 V / 60 Hz	Test Date	2021/8/26
Test Mode	Mode 1: Transmit	Engineer	Johnny Lee
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	BLE 2M,2.402GHz	Humidity (%RH)	62.3

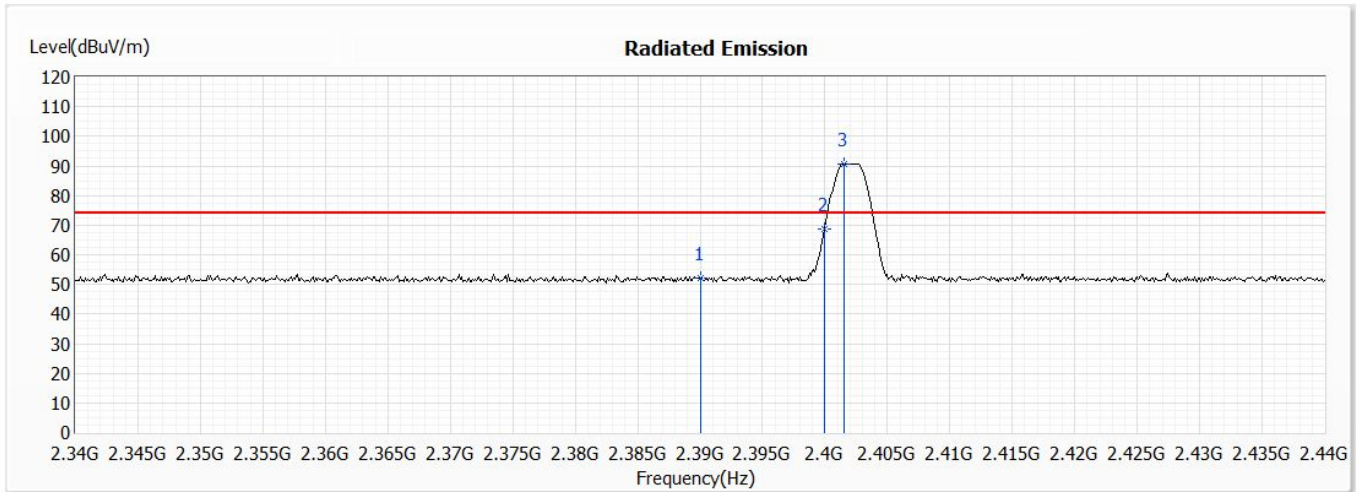


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2390.000	52.12	74.00	-21.88	38.93	13.19	PK
2	2400.000	68.57	--	--	55.37	13.20	PK
! 3	2401.500	90.80	--	--	77.60	13.20	PK

Remark:

1. "\*" means this data is the worst emission level;  
"!" means this data is over limit.
2. Emission Level=Reading Level + Correct Factor(Correct Factor=Ant Factor+ Cable Loss- Pre Amp).
3. Margin= Emission Level- Limit.

Model No	R04010	Site	966-3
Test Voltage	AC 120 V / 60 Hz	Test Date	2021/8/26
Test Mode	Mode 1: Transmit	Engineer	Johnny Lee
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	BLE 2M,2.402GHz	Humidity (%RH)	62.3

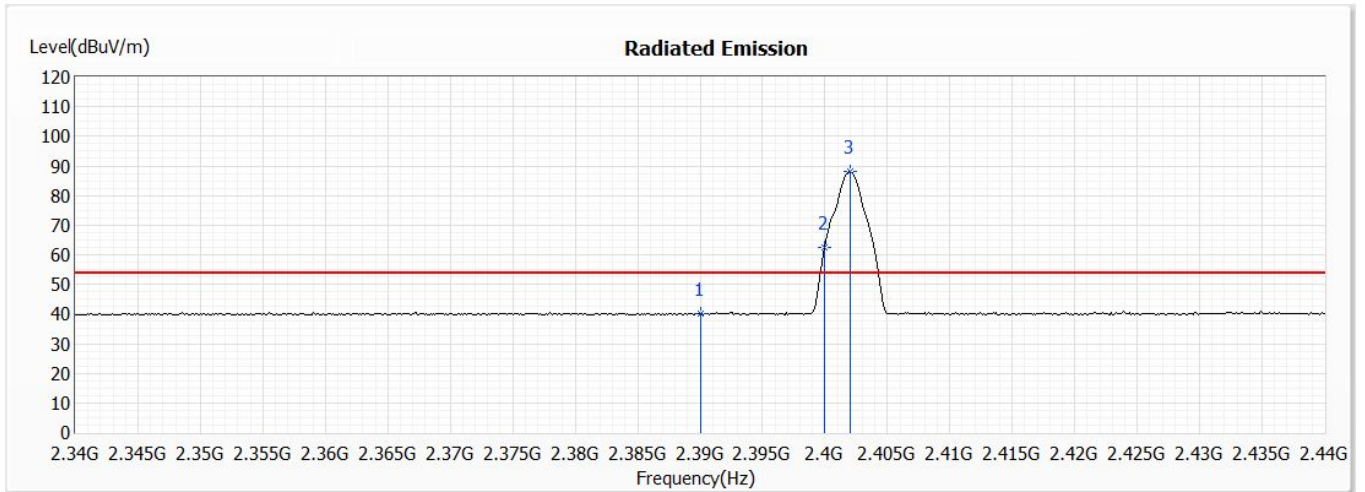


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2390.000	40.27	54.00	-13.73	27.08	13.19	AV
! 2	2400.000	62.50	--	--	49.30	13.20	AV
! 3	2402.000	87.99	--	--	74.79	13.20	AV

Remark:

1. "\*" means this data is the worst emission level;  
 "!" means this data is over limit.
2. Emission Level=Reading Level + Correct Factor(Correct Factor=Ant Factor+ Cable Loss- Pre Amp).
3. Margin= Emission Level- Limit.

Model No	R04010	Site	966-3
Test Voltage	AC 120 V / 60 Hz	Test Date	2021/8/26
Test Mode	Mode 1: Transmit	Engineer	Johnny Lee
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	BLE 2M,2.402GHz	Humidity (%RH)	62.3

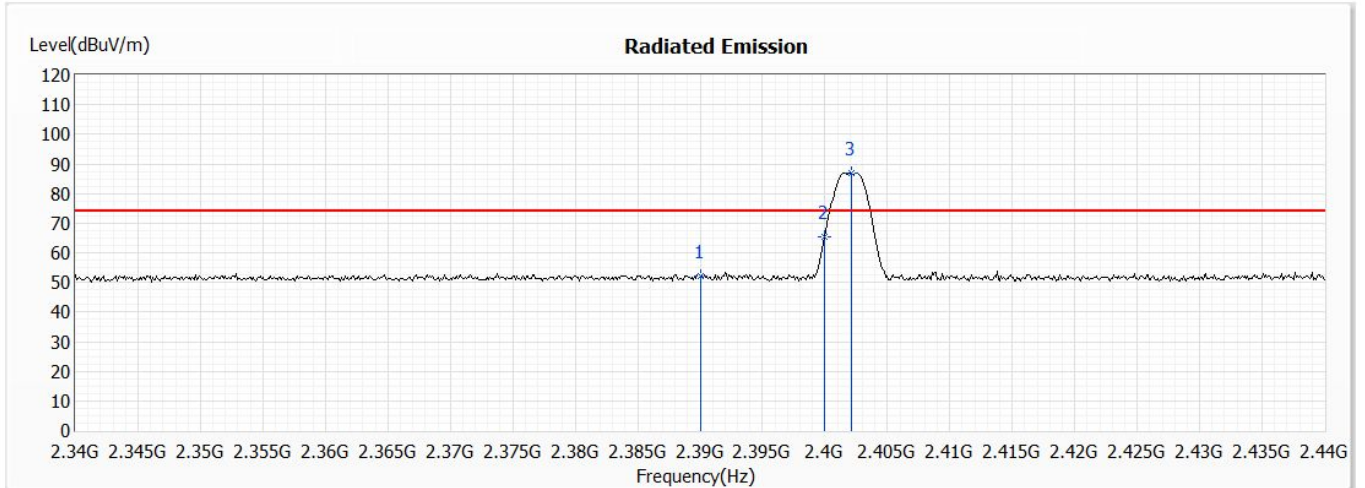


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2390.000	52.20	74.00	-21.80	39.01	13.19	PK
2	2400.000	65.38	--	--	52.18	13.20	PK
! 3	2402.100	86.83	--	--	73.63	13.20	PK

Remark:

- "\*" means this data is the worst emission level;  
"!" means this data is over limit.
- Emission Level=Reading Level + Correct Factor(Correct Factor=Ant Factor+ Cable Loss- Pre Amp).
- Margin= Emission Level- Limit.

Model No	R04010	Site	966-3
Test Voltage	AC 120 V / 60 Hz	Test Date	2021/8/26
Test Mode	Mode 1: Transmit	Engineer	Johnny Lee
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	BLE 2M,2.402GHz	Humidity (%RH)	62.3

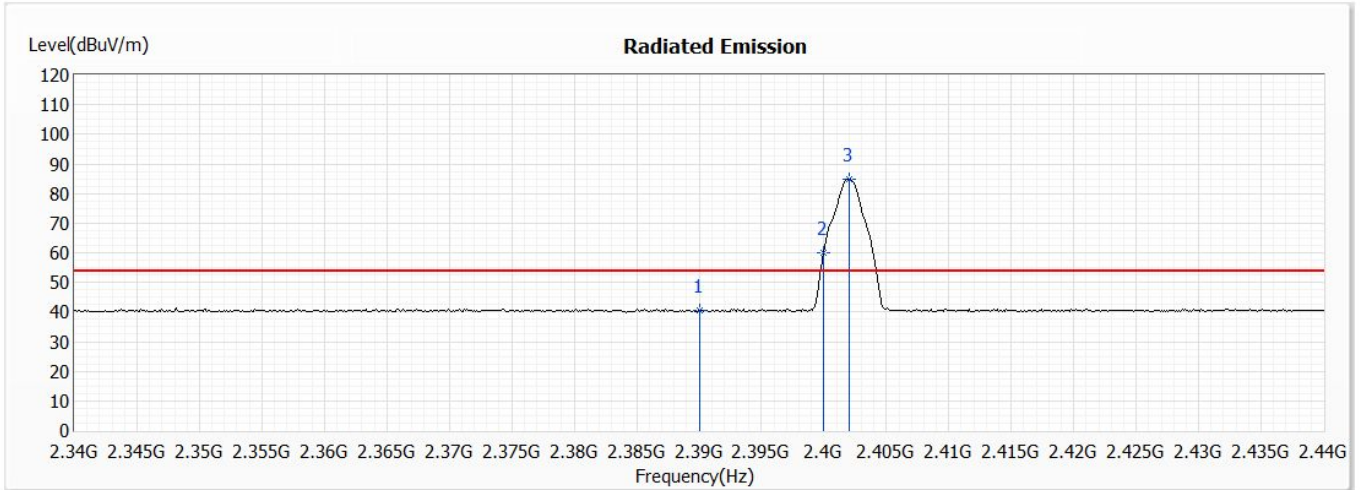


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2390.000	40.44	54.00	-13.56	27.25	13.19	AV
! 2	2400.000	59.97	--	--	46.77	13.20	AV
! 3	2402.000	84.94	--	--	71.74	13.20	AV

Remark:

1. "\*" means this data is the worst emission level;  
"!" means this data is over limit.
2. Emission Level=Reading Level + Correct Factor(Correct Factor=Ant Factor+ Cable Loss- Pre Amp).
3. Margin= Emission Level- Limit.

Model No	R04010	Site	966-3
Test Voltage	AC 120 V / 60 Hz	Test Date	2021/8/26
Test Mode	Mode 1: Transmit	Engineer	Johnny Lee
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	BLE 2M,2.48GHz	Humidity (%RH)	62.3

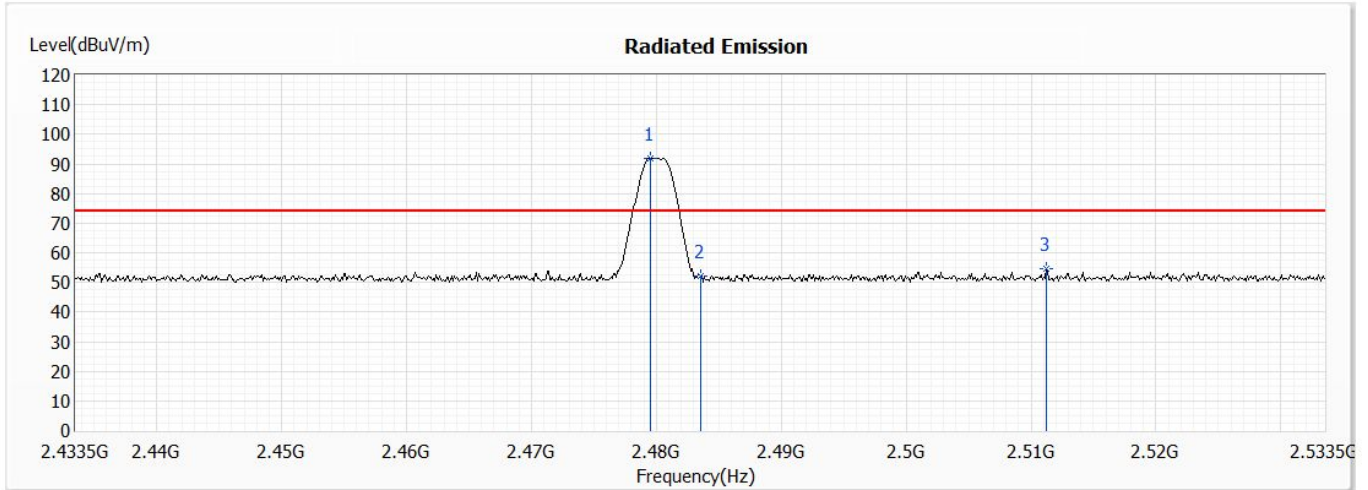


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2479.500	92.00	--	--	78.79	13.21	PK
2	2483.500	51.98	74.00	-22.02	38.77	13.21	PK
3	2511.200	54.50	74.00	-19.50	41.28	13.22	PK

Remark:

1. "\*" means this data is the worst emission level;  
"!" means this data is over limit.
2. Emission Level=Reading Level + Correct Factor(Correct Factor=Ant Factor+ Cable Loss- Pre Amp).
3. Margin= Emission Level- Limit.



Model No	R04010	Site	966-3
Test Voltage	AC 120 V / 60 Hz	Test Date	2021/8/26
Test Mode	Mode 1: Transmit	Engineer	Johnny Lee
Polarity	Horizontal	Temperature (°C)	25.5
Test Condition	BLE 2M,2.48GHz	Humidity (%RH)	62.3

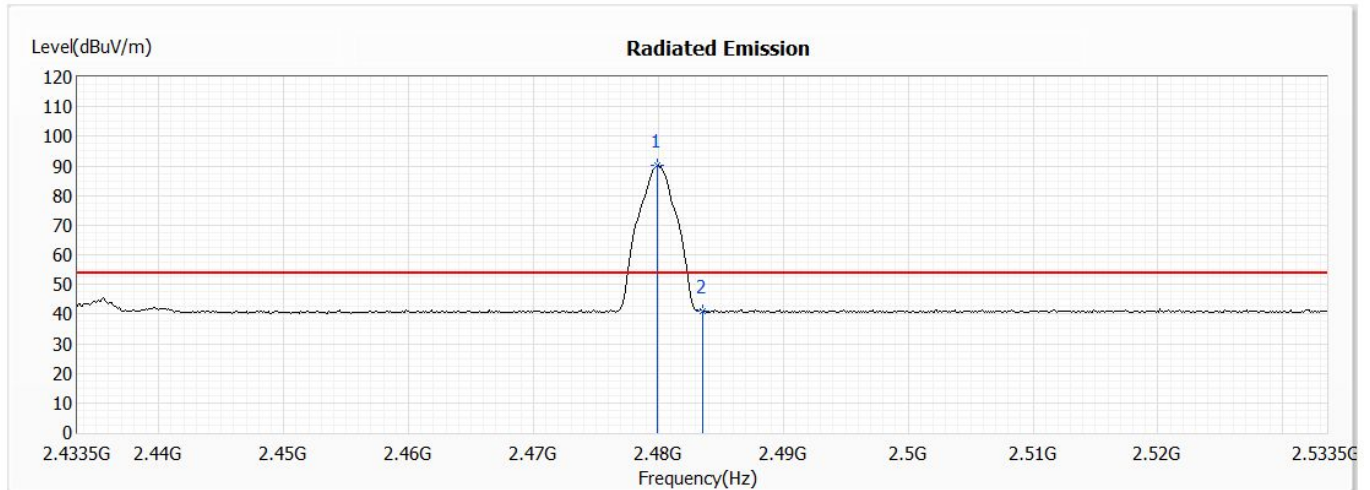


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2479.900	90.05	--	--	76.84	13.21	AV
2	2483.500	40.94	54.00	-13.06	27.73	13.21	AV

Remark:

- "\*" means this data is the worst emission level;  
"!" means this data is over limit.
- Emission Level=Reading Level + Correct Factor(Correct Factor=Ant Factor+ Cable Loss- Pre Amp).
- Margin= Emission Level- Limit.

Model No	R04010	Site	966-3
Test Voltage	AC 120 V / 60 Hz	Test Date	2021/8/26
Test Mode	Mode 1: Transmit	Engineer	Johnny Lee
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	BLE 2M,2.48GHz	Humidity (%RH)	62.3

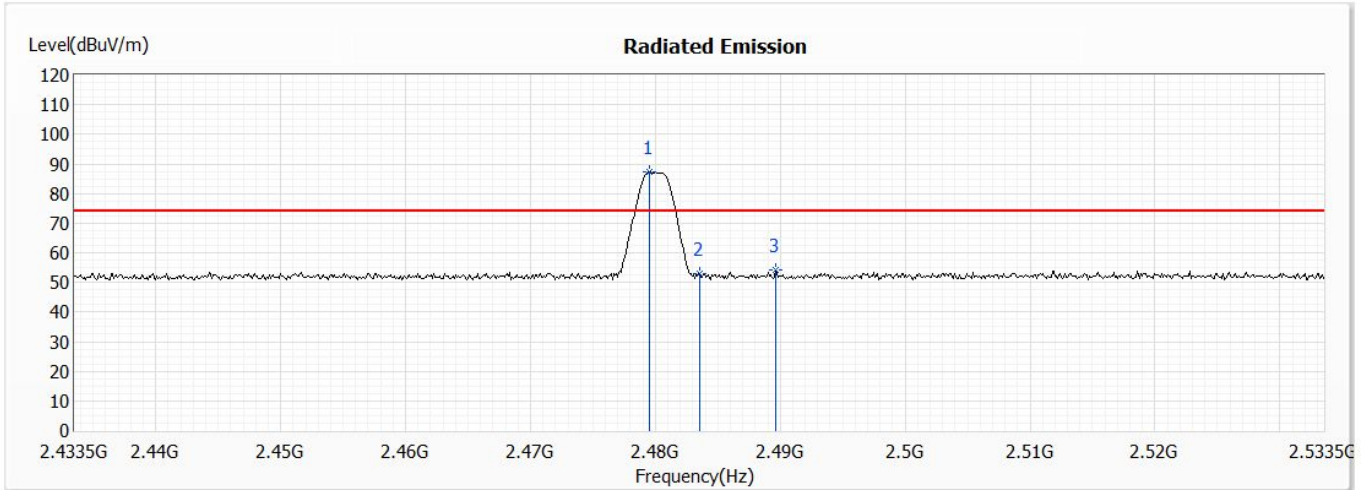


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2479.500	87.32	--	--	74.11	13.21	PK
2	2483.500	52.84	74.00	-21.16	39.63	13.21	PK
3	2489.600	54.27	74.00	-19.73	41.05	13.22	PK

Remark:

- "\*" means this data is the worst emission level;  
"!" means this data is over limit.
- Emission Level=Reading Level + Correct Factor(Correct Factor=Ant Factor+ Cable Loss- Pre Amp).
- Margin= Emission Level- Limit.

Model No	R04010	Site	966-3
Test Voltage	AC 120 V / 60 Hz	Test Date	2021/8/26
Test Mode	Mode 1: Transmit	Engineer	Johnny Lee
Polarity	Vertical	Temperature (°C)	25.5
Test Condition	BLE 2M,2.48GHz	Humidity (%RH)	62.3

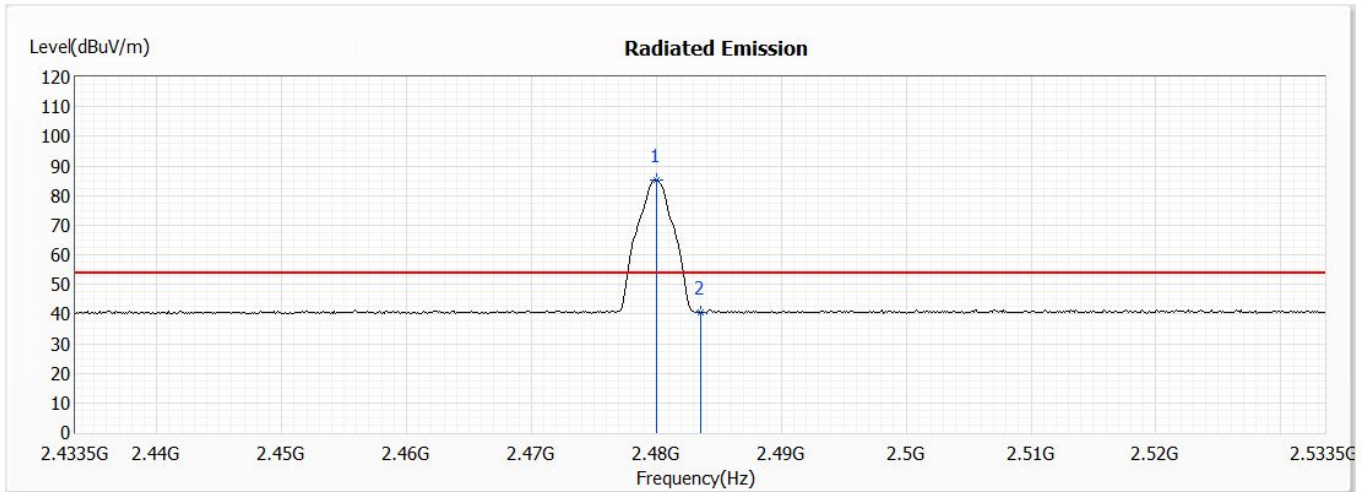

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2480.000	85.26	--	--	72.05	13.21	AV
2	2483.500	40.62	54.00	-13.38	27.41	13.21	AV


Remark:

- "\*" means this data is the worst emission level;  
"!" means this data is over limit.
- Emission Level=Reading Level + Correct Factor(Correct Factor=Ant Factor+ Cable Loss- Pre Amp).
- Margin= Emission Level- Limit.

Test Result of Band Edge	<b>PASS</b>
--------------------------	-------------

## 7. 6dB Bandwidth

### 7.1. Test Setup

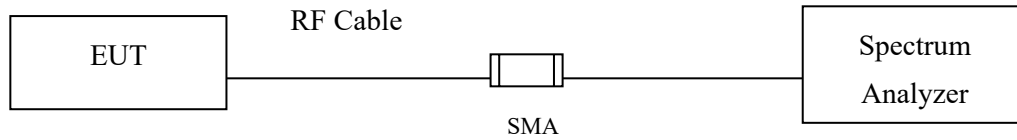

### 7.2. Limits

The minimum bandwidth shall be at least 500 kHz.

### 7.3. Test Procedure


The EUT was setup according to ANSI C63.4, 2014; tested according to ANSI C63.10 Section 11.8 for compliance to FCC 47CFR 15.247 requirements.

### 7.4. Test Result of 6dB Bandwidth

Product : DIGITAL CAMERA  
 Test Item : 6dB Bandwidth Data  
 Test Mode : Mode 1: Transmit - BLE 1Mbps


Channel No.	Frequency (MHz)	Emission Level (kHz)	Required Limit (kHz)	Result
00	2402	685	>500	Pass
19	2440	685	>500	Pass
39	2480	685	>500	Pass

Figure Channel 00:

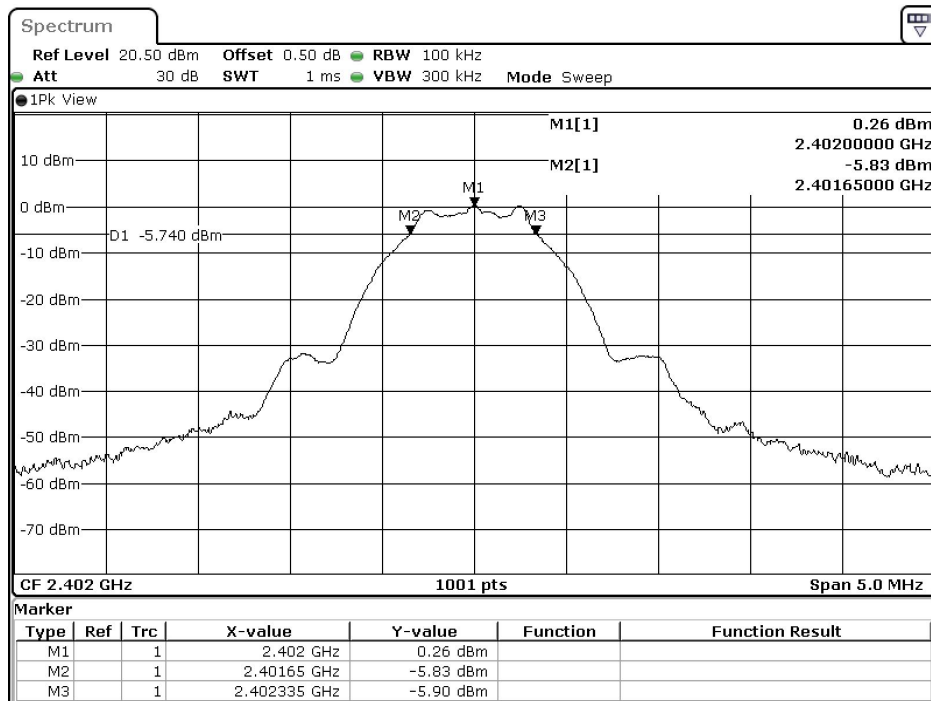


Date: 5.AUG.2021 20:25:04

Figure Channel 19:

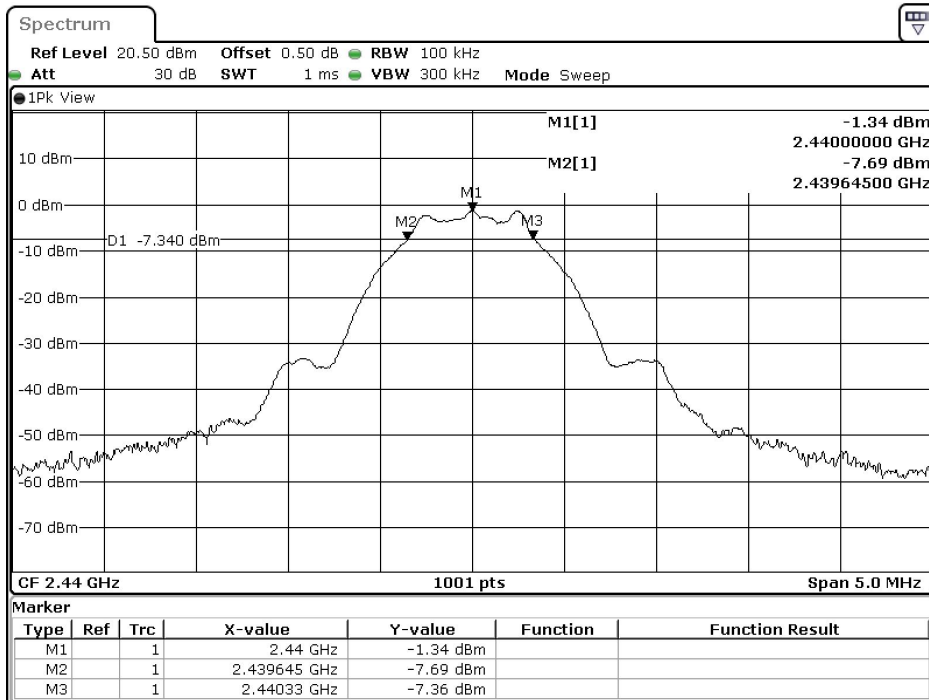

Date: 5.AUG.2021 20:27:40

Figure Channel 39:

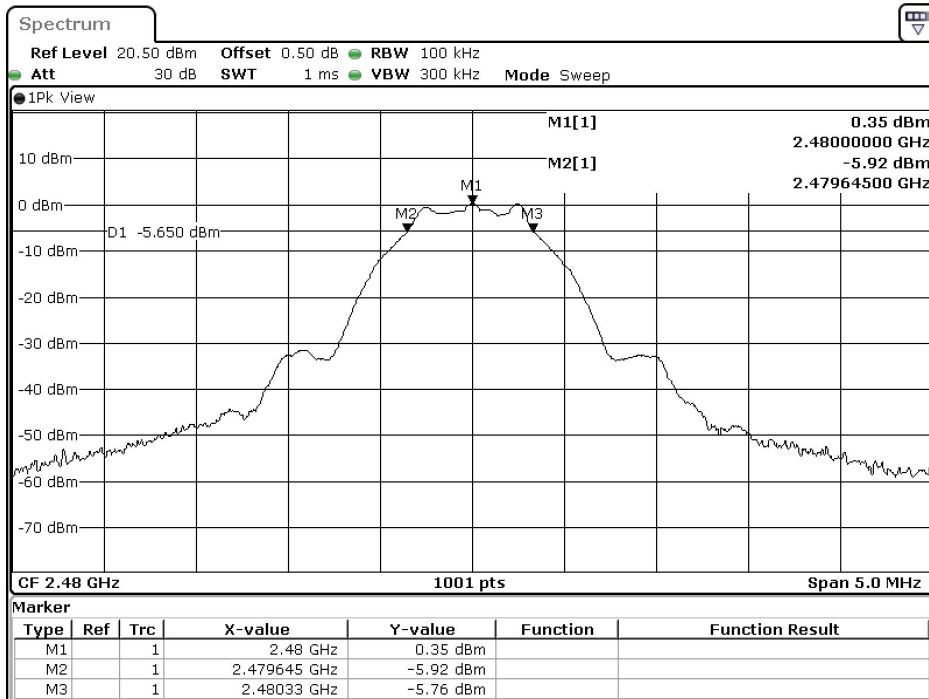


Date: 5.AUG.2021 20:32:32

Test Result of 6dB Bandwidth	PASS
------------------------------	------

Product : DIGITAL CAMERA  
 Test Item : 6dB Bandwidth Data  
 Test Mode : Mode 1: Transmit - BLE 2Mbps


Channel No.	Frequency (MHz)	Emission Level (kHz)	Required Limit (kHz)	Result
00	2402	1165	>500	Pass
19	2440	1165	>500	Pass
39	2480	1165	>500	Pass

Figure Channel 00:

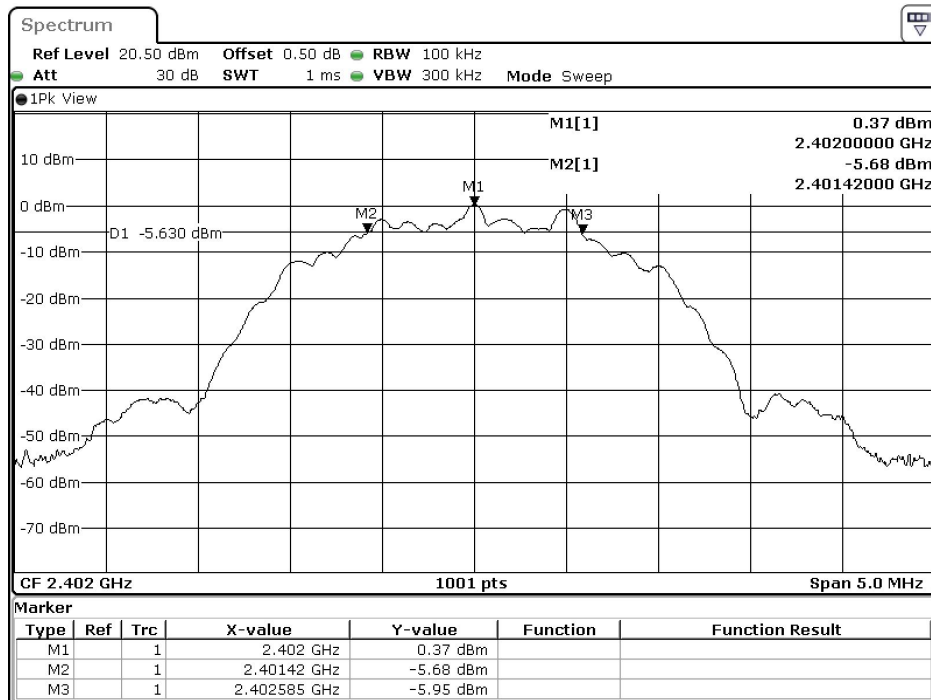


Date: 5.AUG.2021 20:54:21

Figure Channel 19:

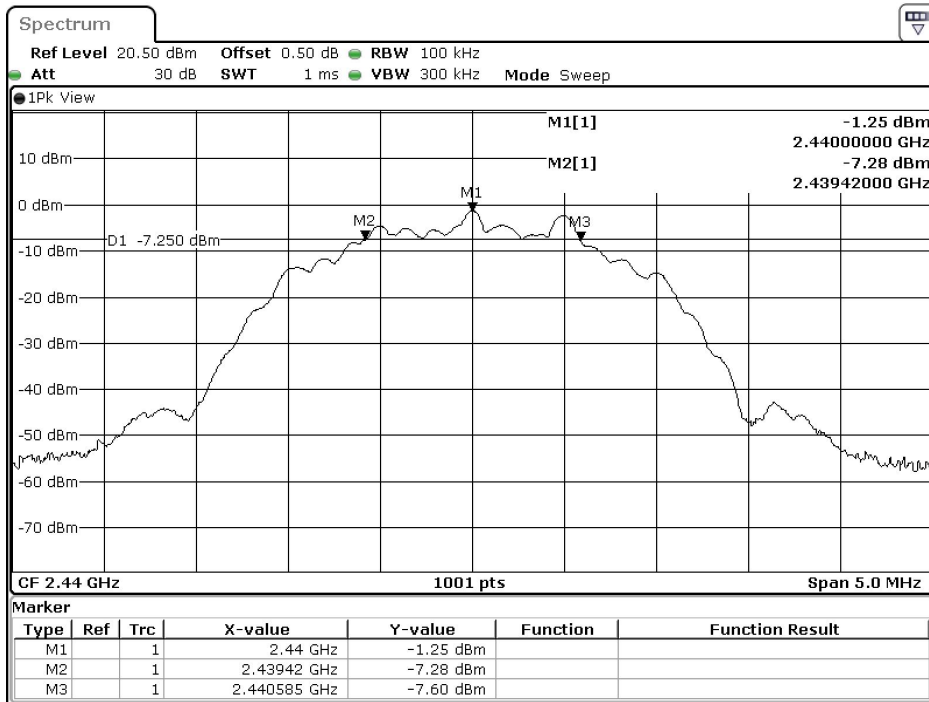

Date: 5.AUG.2021 20:57:20

Figure Channel 39:

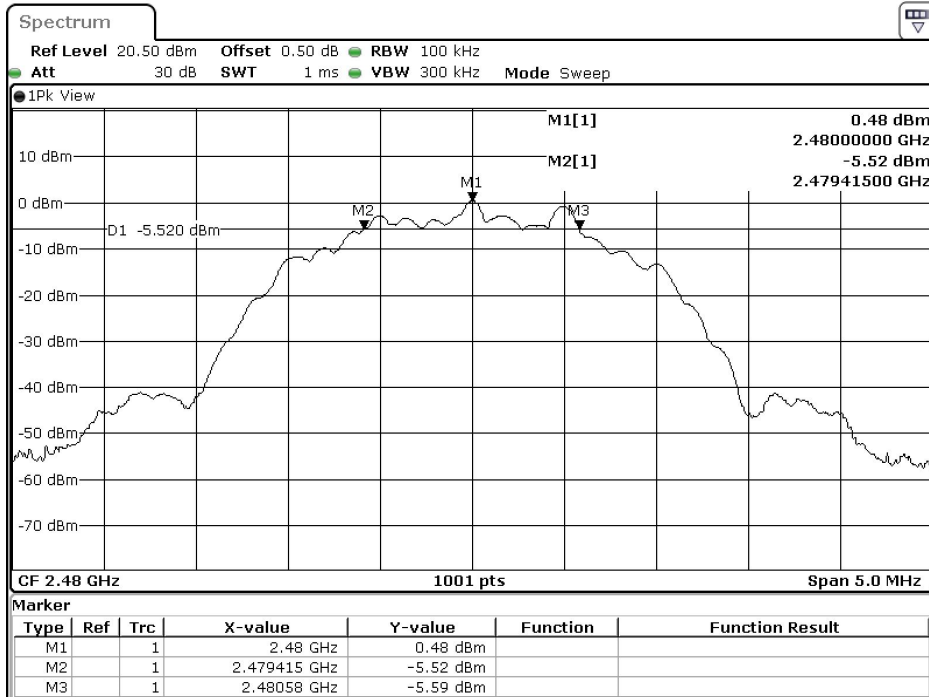


Date: 5.AUG.2021 21:18:40

Test Result of 6dB Bandwidth	PASS
------------------------------	------



## 8. Power Density

### 8.1. Test Setup

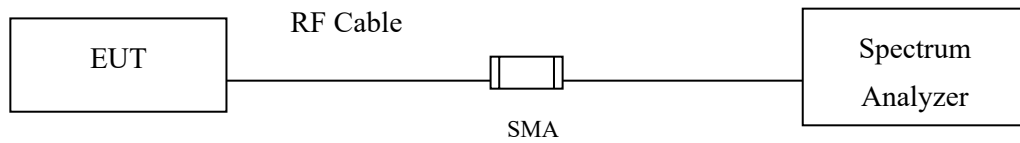

### 8.2. Limits

The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3kHz bandwidth.

### 8.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013; tested according to DTS test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements.


The maximum power spectral density using C63.10 Section 11.10.2 Method PKPSD (peak PSD)

### 8.4. Test Result of Power Density

Product : DIGITAL CAMERA  
 Test Item : Power Density Data  
 Test Mode : Mode 1: Transmit - BLE 1Mbps


Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
00	2402	0.23	≤ 8dBm	Pass
19	2440	-1.36	≤ 8dBm	Pass
39	2480	0.30	≤ 8dBm	Pass

Figure Channel 00:

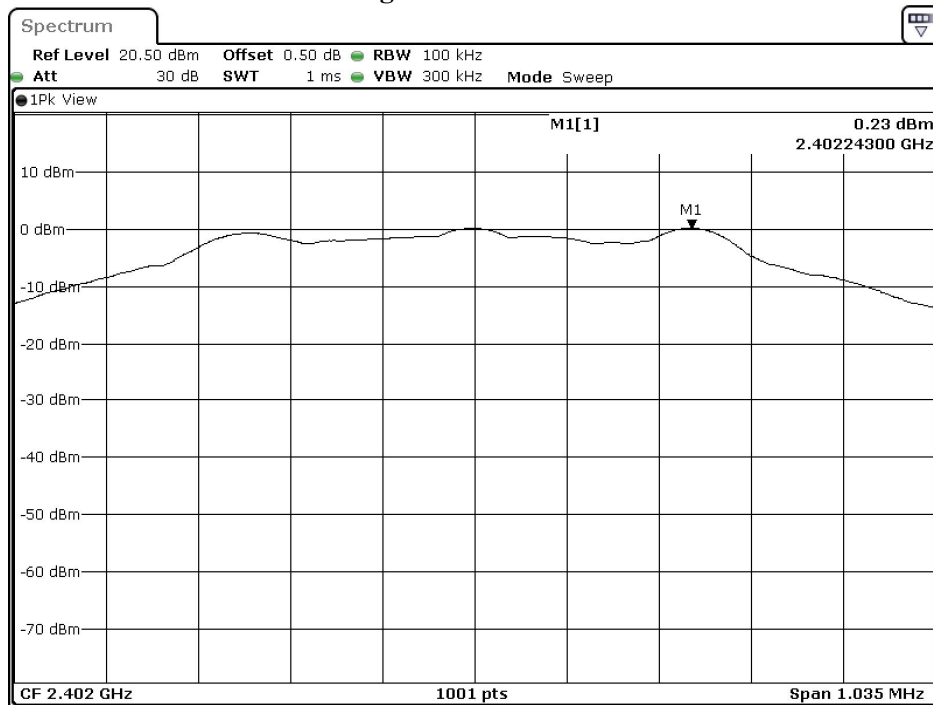


Date: 5.AUG.2021 20:25:25

Figure Channel 19:

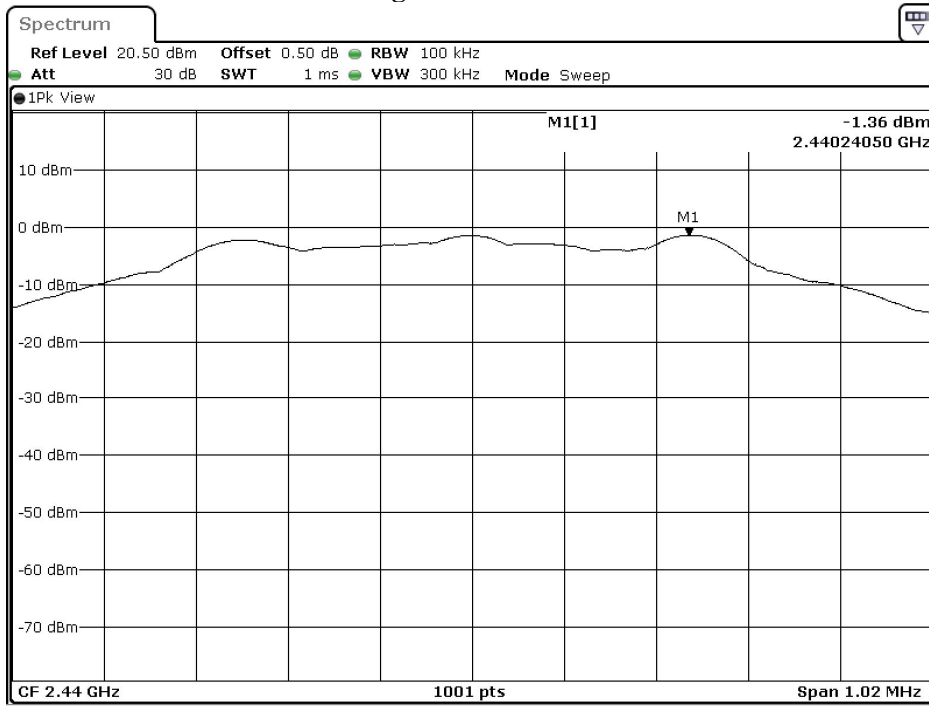

Date: 5.AUG.2021 20:28:02

Figure Channel 39:

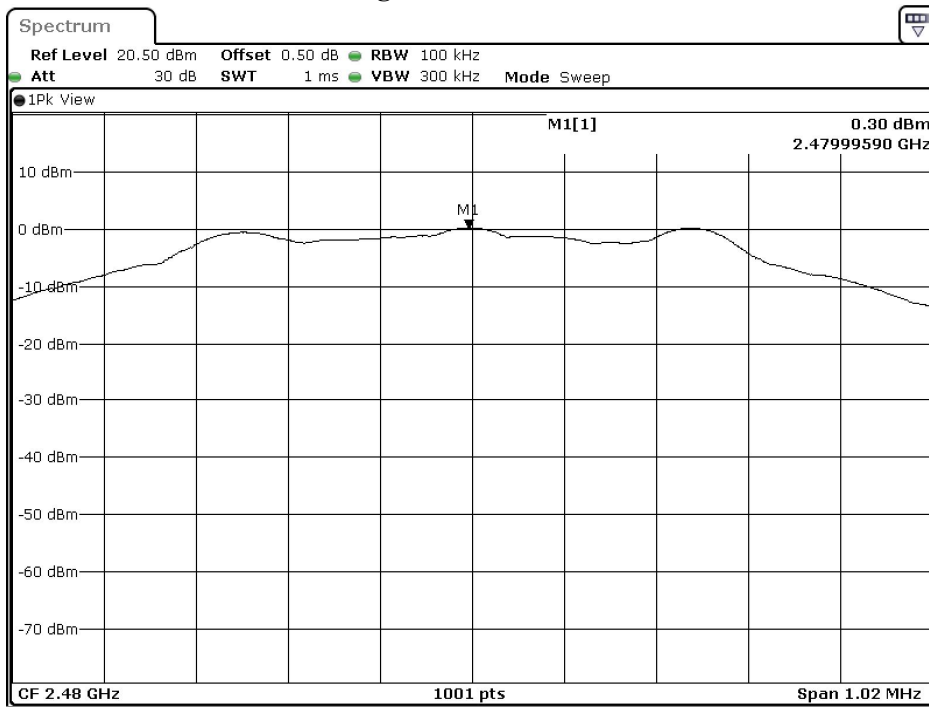


Date: 5.AUG.2021 20:32:54

Test Result of Power Density	PASS
------------------------------	------

Product : DIGITAL CAMERA  
 Test Item : Power Density Data  
 Test Mode : Mode 1: Transmit - BLE 2Mbps


Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
00	2402	0.32	≤ 8dBm	Pass
19	2440	-1.30	≤ 8dBm	Pass
39	2480	0.41	≤ 8dBm	Pass

Figure Channel 00:

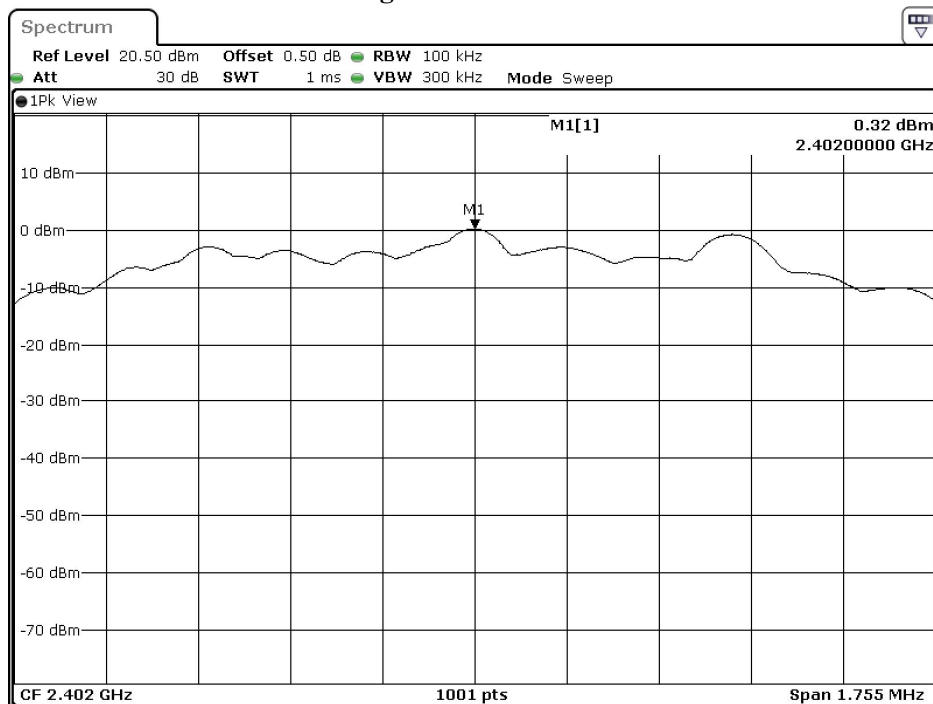


Date: 5.AUG.2021 20:54:42

Figure Channel 19:

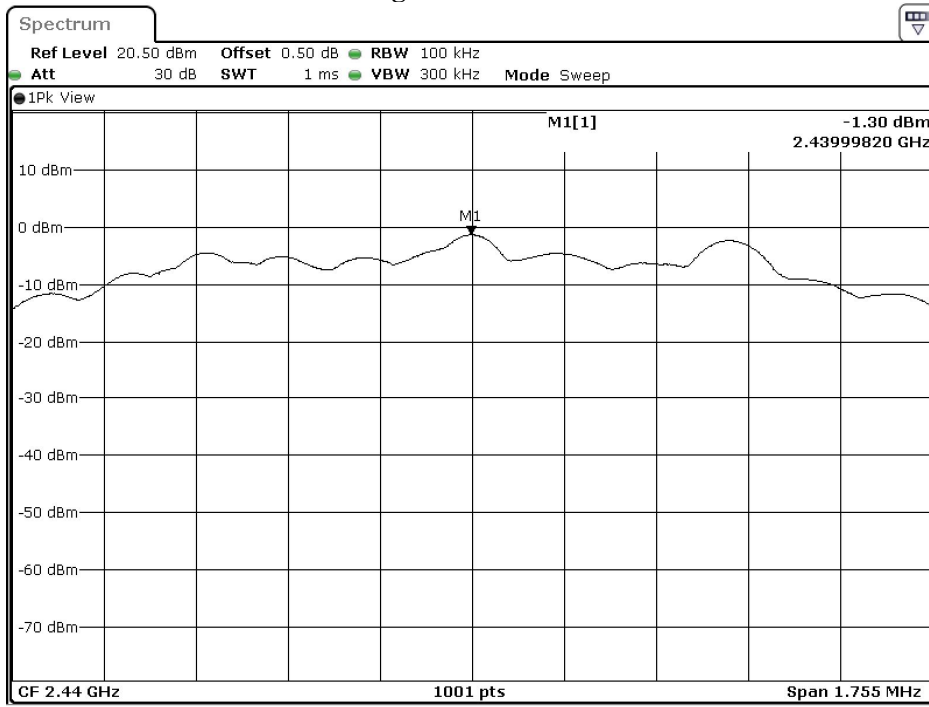

Date: 5.AUG.2021 20:57:42

Figure Channel 39:

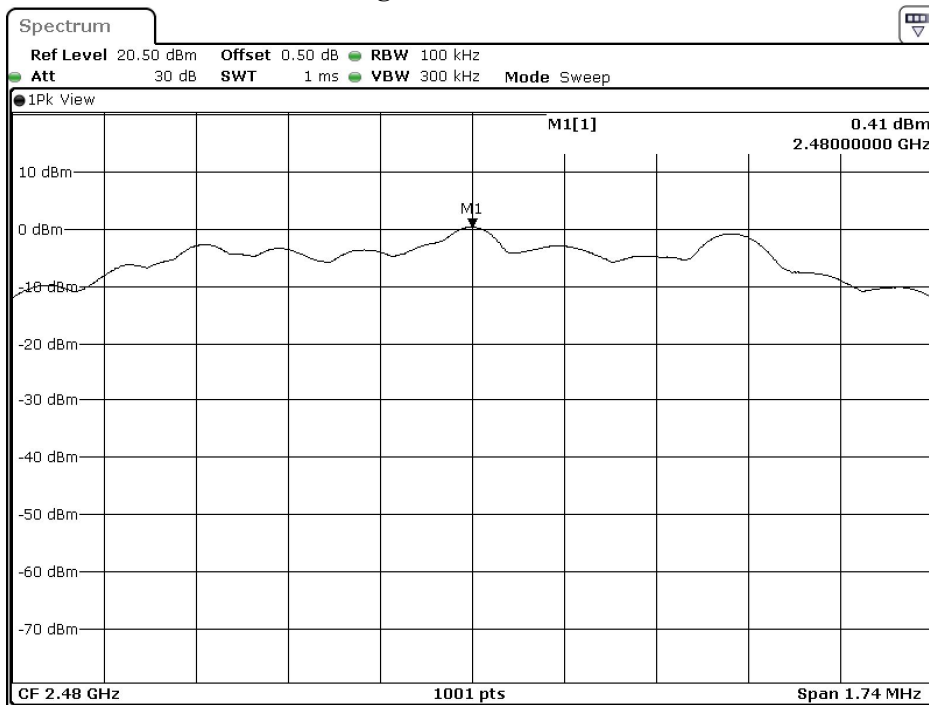


Date: 5.AUG.2021 21:19:02

Test Result of Power Density	PASS
------------------------------	------

## 9. Duty Cycle

### 9.1. Test Setup

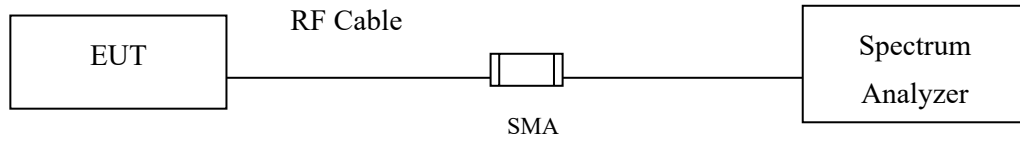

### 9.2. Test Procedure

The EUT was setup according to ANSI C63.10 2013; tested according to ANSI C63.10 2013 for compliance to FCC 47CFR 15.247 requirements.

### 9.3. Test Result of Duty Cycle

Product : DIGITAL CAMERA  
 Test Item : Duty Cycle  
 Test Mode : Mode 1: Transmit - BLE 1Mbps


Duty Cycle Formula:

$$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff})$$

$$\text{Duty Factor} = 10 \text{ Log} (1/\text{Duty Cycle})$$

Results:

2.4GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
BLE 1Mbps	0.3900	0.6250	62.40	2.05

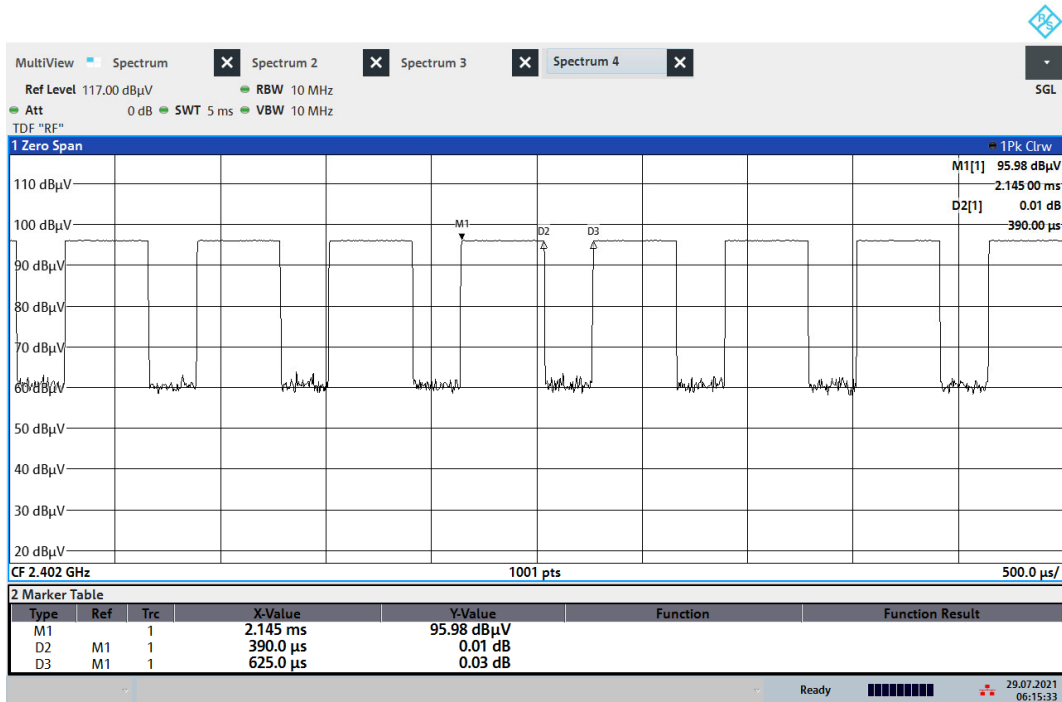

06:15:34 29.07.2021

Product : DIGITAL CAMERA  
 Test Item : Duty Cycle  
 Test Mode : Mode 1: Transmit - BLE 2Mbps

Duty Cycle Formula:

$$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff})$$

$$\text{Duty Factor} = 10 \text{ Log} (1/\text{Duty Cycle})$$

Results:

2.4GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
BLE 2Mbps	0.2060	0.6260	32.91	4.83



15:47:29 26.08.2021



---

**10. EMI Reduction Method During Compliance Testing**

No modification was made during testing.