



SAR TEST REPORT

Test Report No.: 11641159S-A

Applicant : RICOH COMPANY, LTD.
Type of Equipment : Digital Camera
Model No. : RICOH THETA V
FCC ID : BBP-RR214
Test Standard : FCC 47CFR §2.1093
Test Result : Complied

Highest Reported SAR(1g) [W/kg]				Remarks (DTS band)				Remarks (UNII band)			
DTS band	UNII band	Type	Limit	Frequency [MHz]	Mode	Output power (average) [dBm]		Frequency [MHz]	Mode	Output power (average) [dBm]	
						Measured	Max.			Measured	Max
1.28	1.41	Body-worn	1.6	2412	11n(20HT)(MCS0)	13.84	14	5210	11ac(80VHT)(MCS0)	13.13	14

*. Highest reported SAR of this device for body-worn and simultaneous transmission (Bluetooth + Wi-Fi(W52); 0.13(estimated)+1.41=1.54 W/kg) are "1.41 W/kg" and "1.54 W/kg".

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by any agency of the Federal Government.
6. The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan has been accredited.
7. This test report covers Radio technical requirements. It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)

Date of test: May 8~17, 2017

Test engineer: H. Naka
 Hiroshi Naka
 Engineer, Consumer Technology Division

Approved by: T. Imamura
 Toyokazu Imamura
 Leader, Consumer Technology Division

- The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan.
 There is no testing item of "Non-accreditation".



REVISION HISTORY

Revision	Test report No.	Date	Page revised	Contents
Original	11641159S-A	July 11, 2017	-	

*. By issue of new revision report, the report of an old revision becomes invalid.

CONTENTS**PAGE**

REVISION HISTORY	2
CONTENTS	2
SECTION 1: Customer information	3
SECTION 2: Equipment under test (EUT)	3
2.1 Identification of EUT	3
2.2 Product Description.....	3
SECTION 3: Test specification, procedures and results	4
3.1 Test specification.....	4
3.2 Exposure limit	4
3.3 Procedure and result	4
3.4 Test location	4
3.5 Confirmation before SAR testing.....	5
3.6 Confirmation after SAR testing.....	5
3.7 Test setup of EUT and SAR measurement procedure	6
SECTION 4: Operation of EUT during testing	7
SECTION 5: Uncertainty assessment (SAR measurement)	8
SECTION 6: Confirmation before testing	9
6.1 SAR reference power measurement (antenna terminal conducted average power of EUT).....	9
SECTION 7: SAR Measurement results	11
7.1 SAR measurement results.....	11
7.2 SAR Measurement Variability	12
7.3 Simultaneous transmission evaluation	13
7.4 Device holder perturbation verification.....	13

Contents of appendixes

APPENDIX 1: Photographs of test setup	14
Appendix 1-1 Photograph of EUT and antenna position	14
Appendix 1-2 EUT and support equipment.....	15
Appendix 1-3 Photograph of test setup	16
APPENDIX 2: SAR Measurement data	20
Appendix 2-1 Evaluation procedure.....	20
Appendix 2-2 SAR measurement data	21
APPENDIX 3: Test instruments	40
Appendix 3-1 Equipment used	40
Appendix 3-2 Configuration and peripherals	41
Appendix 3-3 Test system specification.....	42
Appendix 3-4 Simulated tissues composition and parameter confirmation	43
Appendix 3-5 Daily check results	43
Appendix 3-6 Daily check measurement data	44
Appendix 3-7 Daily check uncertainty	46
Appendix 3-8 Calibration certificate: E-Field Probe (EX3DV4)	47
Appendix 3-9 Calibration certificate: Dipole (D2450V2).....	58
Appendix 3-10 Calibration certificate: Dipole (D5GHzV2)	66

SECTION 1: Customer information

Company Name	RICOH COMPANY, LTD.
Brand Name	RICOH
Address	1-3-6 Nakamagome, Ohta-ku, Tokyo 143-8555, Japan
Telephone Number	+81-50-3534-5213
Contact Person	Kenji Daigo

SECTION 2: Equipment under test (EUT)**2.1 Identification of EUT**

Type of Equipment	Digital Camera
Model Number	RICOH THETA V
Serial Number	YL00000260
Condition of EUT	Production prototype (Not for sale: This samples is equivalent to mass-produced items.)
Receipt Date of Sample	April 27, 2017 (*. EUT for power measurement.) *. No modification by the Lab. May 12, 2017 (*. EUT for SAR test.) *. No modification by the Lab. (*. After power measurement, the EUT was returned to the customer, and the RF wiring was changed to the original antenna line from the antenna conducted power measurement line for SAR test.)
Country of Mass-production	China
Category Identified	Portable device *. Since EUT may contact and/or very close to a human body during Wi-Fi operation, the partial-body SAR (1g) shall be observed.
Rating	DC 3.6V (Li-ion battery operation), DC 5V (USB BUS power operation) *. The EUT was operated by either the build-in re-chargeable Li-ion battery or USB BUS power via USB cable.
Feature of EUT	The EUT is a Digital Camera which support wireless LAN and Bluetooth 4.2.
SAR Accessory	None

2.2 Product Description (Wireless Module)

	Mode	channel	Operation frequency [MHz]	Data rate [Mbps]	Modulation	Channel spacing [MHz]	Band width [MHz]	Average power [dBm]			
								Min.	Typical	Max.	
Transmit average power (* The measured Tx output power (antenna terminal conducted) refers to section 6 in this report.)	Bluetooth (Ver.4.2)	BDR/EDR	0~79	2402~2480	1~3	FHSS	1	1	-6	0.2	4
		Low energy	0~39	2402~2480	1	FHSS	2	2	-6	0.2	4
		11b	1~11	2412~2462	1~11	DSSS	5	20	10	12	14
		11g	1~11	2412~2462	6~54	OFDM	5	20	10	12	14
		11n(20HT)	1~11	2412~2462	MCS0~7	OFDM	5	20	10	12	14
		11a	36,40,44,48	5180~5240	6~54	OFDM	20	20	10	12	14
		11n(20HT)	36,40,44,48	5180~5240	MCS0~7	OFDM	20	20	10	12	14
		11ac(20VHT)	36,40,44,48	5180~5240	MCS0~8	OFDM	20	20	10	12	14
		11n(40HT)	38,46	5190 5230	MCS0~7	OFDM	20	40	10	12	14
		11ac(40VHT)	38,46	5190 5230	MCS0~9	OFDM	20	40	10	12	14
	11ac(80VHT)	42	5210	MCS0~9	OFDM	20	80	10	12	14	
Equipment type	Transceiver										
Type of modulation	Bluetooth	FHSS: GFSK (*. EDR: GFSK+ $\pi/4$ -DQPSK, GFSK+ 8DPSK)									
	Wi-Fi	DSSS: DBPSK, DQPSK, CCK / OFDM: BPSK, QPSK, 16QAM, 64QAM, 256QAM (*.256QAM is supported by 11ac mode.)									
Power supply	DC 1.3V, DC 1.8V, DC 3.0V (*. These power are supplied via constant voltage circuit.)										
Quantity of Antenna	1 piece										
Antenna type	$\lambda/4$ Monopole antenna	Antenna connector type	This antenna is printed on the print circuit board.								
Antenna gain (Peak)	0.119 dBi (2.4GHz band), -3.803 dBi (W52 band) (*.including cable loss)										

*. The EUT do not use the special transmitting technique such as "beam-forming" and "time-space code diversity."

*. This Wireless module supports both Wi-Fi and Bluetooth. Wi-Fi of 2.4GHz and Bluetooth were not transmitted simultaneously. Wi-Fi of 5GHz and Bluetooth were transmitted simultaneously at same antenna. Therefore simultaneously transmitted SAR was only considered for Wi-Fi of 5GHz band operation.

SECTION 3: Test specification, procedures and results

3.1 Test specification

The US Federal Communications Commission has released the report and order "Guidelines for Evaluating the Environmental Effects of RF Radiation", ET Docket No. 93-62 in August 1996. The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g for an uncontrolled environment and 8.0 mW/g for an occupational/controlled environment as recommended by the ANSI/IEEE standard C95.1-1992. The device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling in accordance with the following measurement procedures..

KDB 447498 D01 (v06):	General RF exposure guidance
KDB 248227 D01 (v02r02):	SAR Guidance for IEEE 802.11 (Wi-Fi) transmitters
KDB 865664 D01 (v01r04):	SAR measurement 100MHz to 6GHz
IEEE Std. 1528-2013:	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

3.2 Exposure limit

Environments of exposure limit	Whole-Body (averaged over the entire body)	Partial-Body (averaged over any 1g of tissue)	Hands, Wrists, Feet and Ankles (averaged over any 10g of tissue)
(A) Limits for Occupational /Controlled Exposure (W/kg)	0.4	8.0	20.0
(B) Limits for General population /Uncontrolled Exposure (W/kg)	0.08	1.6	4.0

*. **Occupational/Controlled Environments:** are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

*. **General Population/Uncontrolled Environments:** are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

The limit applied in this test report is;

General population / uncontrolled exposure, Partial-Body (averaged over any 1g of tissue) limit: 1.6 W/kg
General population / uncontrolled exposure, Hands (averaged over any 10g of tissue) limit: 4 W/kg

3.3 Procedures and Results

Band (Operation frequency [MHz])	Bluetooth (BT) (2402-2480)	Wi-Fi (DTS) (2412-2462)	Wi-Fi (U-NII-1) (5180-5240)(W52)	Simultaneous transmission (Bluetooth+Wi-Fi(U-NII-1,W52))(*1)
Test Procedure	SAR measurement; KDB 447498, KDB 248227, KDB 865664, IEEE Std.1528			
Category	FCC 47CFR §2.1093 (Portable device)		SAR type	Body touch
Results (Reported SAR(1g))	Complied	Complied	Complied	Complied
SAR (1g) Limit [W/kg]	1.6	1.6	1.6	1.6
Reported SAR(1g) value	0.12 W/kg (* Estimated SAR: 0.13 W/kg)	1.28 W/kg	1.41 W/kg	1.54 W/kg (BT: 0.13 W/kg (Estimated) + Wi-Fi(W52): 1.41 W/kg)
Measured SAR value	0.108 W/kg	1.23 W/kg	1.13 W/kg	(Refer to left column)
Mode, frequency[MHz]	BDR(DH5), 2441	11n(20HT)(MCS0), 2412	11ac(80VHT)(MCS0), 5210	(Refer to left column)
Duty cycle [%] (scaled factor)	77.8 (×1.02 (*1))	99.7 (×1.00)	97.7 (×1.02)	(Refer to left column)
Output average power [dBm] (max. power, scaled factor)	3.66 (4, ×1.08)	13.84 (14, ×1.04)	13.13 (14, ×1.22)	(Refer to left column)

Note: UL Japan's SAR Work Procedures No.13-EM-W0429 and 13-EM-W0430. No addition, deviation nor exclusion has been made from standards

*. (Calculating formula) Corrected SAR to max.power (W/kg) = (Measured SAR (W/kg)) × (Duty scaled) × (Tune-up factor)

where; Tune-up factor [-] = 1 / (10 ^ (^Δmax (max.power - burst average power, dB" / 10)), Duty scaled factor [-] = 100(%) / (duty cycle, %)

*1. This Wireless module supports both Wi-Fi and Bluetooth. Wi-Fi of 2.4GHz and Bluetooth were not transmitted simultaneously. Wi-Fi of 5GHz and Bluetooth were transmitted simultaneously at same antenna. Therefore simultaneously transmitted SAR was only considered for Wi-Fi of 5GHz band operation.

*2. The measured duty cycle number of BDR was nearly equal to highest theory duty cycle. Therefore the duty scaled factor for SAR was decided by "×1.00".

3.4 Test Location

No.7 shielded room (2.76 m (Width) × 3.76 m (Depth) × 2.4 m (Height)) for SAR testing.

UL Japan, Inc., Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken 259-1220 JAPAN

Telephone number: +81 463 50 6400 / Facsimile number: +81 463 50 6401

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400 / Facsimile: +81 463 50 6401

3.5 Confirmation before SAR testing

3.5.1 Average power for SAR tests

Before SAR test, the RF wiring for the sample had been switched to the antenna conducted power measurement line from the antenna line and the average power was measured. The result is shown in Section 6.

*. The EUT transmission power was verified that it was within 2dB lower than the maximum tune-up tolerance limit when it was set the rated power. (Clause 4.1, KDB447498 D01 (v06))

Step.1 Data rate check (*. The EUT supported the following data rate in each operation mode.)

802.11b		802.11g		802.11a		802.11n(HT20)		802.11n(HT40)			
Modulation	Data rate	Modulation	Data rate	Modulation	Data rate	MCS	SS	Modulation	MCS	SS	Modulation
DBPSK/DSSS	1 Mbps	BPSK/OFDM	6 Mbps	BPSK/OFDM	6 Mbps	0	1	BPSK/OFDM	0	1	BPSK/OFDM
DQPSK/DSSS	2 Mbps	BPSK/OFDM	9 Mbps	BPSK/OFDM	9 Mbps	1	1	QPSK/OFDM	1	1	QPSK/OFDM
CCK/DSSS	5.5 Mbps	QPSK/OFDM	12 Mbps	QPSK/OFDM	12 Mbps	2	1	QPSK/OFDM	2	1	QPSK/OFDM
CCK/DSSS	11 Mbps	QPSK/OFDM	18 Mbps	QPSK/OFDM	18 Mbps	3	1	16QAM/OFDM	3	1	16QAM/OFDM
		16QAM/OFDM	24 Mbps	16QAM/OFDM	24 Mbps	4	1	16QAM/OFDM	4	1	16QAM/OFDM
		16QAM/OFDM	36 Mbps	16QAM/OFDM	36 Mbps	5	1	64QAM/OFDM	5	1	64QAM/OFDM
		64QAM/OFDM	48 Mbps	64QAM/OFDM	48 Mbps	6	1	64QAM/OFDM	6	1	64QAM/OFDM
		64QAM/OFDM	54 Mbps	64QAM/OFDM	54 Mbps	7	1	64QAM/OFDM	7	1	64QAM/OFDM

802.11ac(VHT20)			802.11ac(VHT40)			802.11ac(VHT80)			Bluetooth		
MCS	SS	Modulation	MCS	SS	Modulation	MCS	SS	Modulation	Type	Modulation	Packet type
0	1	BPSK/OFDM	0	1	BPSK/OFDM	0	1	BPSK/OFDM	BLE	GFSK/FHSS	BLE (1Mbps)
1	1	QPSK/OFDM	1	1	QPSK/OFDM	1	1	QPSK/OFDM	BDR	GFSK/FHSS	DH1 (1Mbps)
2	1	QPSK/OFDM	2	1	QPSK/OFDM	2	1	QPSK/OFDM	BDR	GFSK/FHSS	DH3 (1Mbps)
3	1	16QAM/OFDM	3	1	16QAM/OFDM	3	1	16QAM/OFDM	BDR	GFSK/FHSS	DH5 (1Mbps)
4	1	16QAM/OFDM	4	1	16QAM/OFDM	4	1	16QAM/OFDM	EDR2	$\pi/4$ -DQPSK/FHSS	2-DH1 (2Mbps)
5	1	64QAM/OFDM	5	1	64QAM/OFDM	5	1	64QAM/OFDM	EDR2	$\pi/4$ -DQPSK/FHSS	2-DH3 (2Mbps)
6	1	64QAM/OFDM	6	1	64QAM/OFDM	6	1	64QAM/OFDM	EDR2	$\pi/4$ -DQPSK/FHSS	2-DH5 (2Mbps)
7	1	64QAM/OFDM	7	1	64QAM/OFDM	7	1	64QAM/OFDM	EDR3	8DPSK/FSSS	3-DH1 (3Mbps)
8	1	256QAM/OFDM	8	1	256QAM/OFDM	8	1	256QAM/OFDM	EDR3	8DPSK/FSSS	3-DH3 (3Mbps)
			9	1	256QAM/OFDM	9	1	256QAM/OFDM	EDR3	8DPSK/FSSS	3-DH5 (3Mbps)

*. SS: Spatial Stream

Step.2 Consideration of SAR test channel

For the SAR test reference, on each operation band, the average output power was measured on the low/middle/upper and specified channels with the worst data rate condition in step 1 in the above.

3.6 Confirmation after SAR testing

It was checked that the power drift [W] is within $\pm 5\%$ in the evaluation procedure of SAR testing. The verification of power drift during the SAR test is that DASY5 system calculates the power drift by measuring the e-filed at the same location at beginning and the end of the scan measurement for each test position.

The result is shown in APPENDIX 2.

*. DASY5 system calculation Power drift value[dB] = $20\log(E_a)/(E_b)$ (where, Before SAR testing: $E_b[V/m]$ / After SAR testing: $E_a[V/m]$)

Limit of power drift[W] = $\pm 5\%$

Power drift limit (X) [dB] = $10\log(P_drift) = 10\log(1.05/1) = 10\log(1.05) - 10\log(1) = 0.21\text{dB}$
from E-filed relations with power.

$S = E \times H = E^2 / \eta = P / (4 \times \pi \times r^2)$ (η : Space impedance) $\rightarrow P = (E^2 \times 4 \times \pi \times r^2) / \eta$

Therefore, The correlation of power and the E-filed

Power drift limit (X) dB = $10\log(P_drift) = 10\log(E_drift)^2 = 20\log(E_drift)$

From the above mentioned, **the calculated power drift of DASY5 system must be the less than $\pm 0.21\text{dB}$.**

3.7 Test setup of EUT and SAR measurement procedure

Antenna separation distances in each test setup plan are shown as follows.

Setup plan	Explanation of SAR test setup plan (* Refer to Appendix 1 for test setup photographs which had been tested.)	D [mm]	SAR Tested /Reduced (*1)	SAR type
Front-right	The right portion of front of camera(shutter button side) is touched to the Flat phantom with tilted.	2.1	Tested	Body-touch
Front	The front lens of camera (shutter button side) is touched to the Flat phantom.	2.8	Tested	
Right	The right surface (switch side) of camera is touched to the Flat phantom.	6.2	Tested	
Back	The back lens of camera is touched to the Flat phantom.	≈13	Tested	
Left	The left surface of camera is touched to the Flat phantom.	32.3	Reduced	
Top	When test is required, the top of camera is touched to the Flat phantom.	46.6	Reduced	
Bottom	When test is required, the bottom of camera is touched to the Flat phantom.	75.6	Reduced	

*. D: Antenna separation distance. It is the distance from the antenna inside EUT to the outer surface of EUT which an operator may touch.

*. Size of EUT: 45.2 mm (width) × 130.9 mm (height) × 22.9 mm (depth)

*1. Consideration for SAR evaluation exemption

KDB 447498 D01 (v06) was taken into consideration to reduce SAR test.

Consideration of SAR test reduction by the antenna separation distance (100MHz~6GHz, ≤50mm)														
Band, Mode	Setup Position	Minimum distance		Upper frequency [GHz]	Maximum power			Calculation of exclusion (*2)	SAR type	SAR test exclusion		Remarks		
		[mm]	[mm] (rounded)		[dBm]	[mW]	[mW] (rounded)			Judge for Exclusion	Standalone SAR test required?			
Bluetooth (BDR/EDRL/LE)	Front-right	2.1	≤5	2.480	4.0	2.5	3	0.9	1g	≤3.0	Reduced	*. SAR test was applied.		
	Front-right	2.1	≤5							10.0	1g		≤3.0	(>3) Required
WLAN 2.4GHz b.g.n(20HT)	Front	2.8	≤5	2.462	15.0	31.6	32	10.0	1g	≤3.0	(>3) Required	-		
	Right	6.2	6							8.4	1g	≤3.0	(>3) Required	-
	Back	≈13	13							3.9	1g	≤3.0	(>3) Required	-
	Left	32.3	32							1.6	1g	≤3.0	Reduced	≥32mm can reduce SAR test.
	Top	46.6	47							1.1	1g	≤3.0	Reduced	-
	Front-right	2.1	≤5							5.240	15.0	31.6	32	14.7
Front	2.8	≤5	14.7	1g	≤3.0	(>3) Required	-							
Right	6.2	6	12.2	1g	≤3.0	(>3) Required	-							
Back	≈13	13	5.6	1g	≤3.0	(>3) Required	-							
Left	32.3	32	1.6	1g	≤3.0	Reduced	≥32mm can reduce SAR test.							
Top	46.6	47	1.5	1g	≤3.0	Reduced	-							

*2. Parenthesis 1), Clause 4.3.1, KDB 447498 D01 (v06) gives the following formula to calculate the SAR(1g) test exclusion thresholds for 100MHz-6GHz at test separation distance ≤50mm.

$$[(\text{max.power of channel, including tune-up tolerance, mW}) / (\text{min.test separation distance, mm})] \times [\sqrt{f} (\text{GHz})] \leq 3.0 \text{ (for SAR(1g))}, 7.5 \text{ (for SAR(10g))} \quad \text{formula (1)}$$

If power is calculated from the upper formula (1);

$$[\text{SAR(1g) test exclusion thresholds, mW}] = 3 \times [\text{test separation distance, mm}] / [\sqrt{f} (\text{GHz})] \dots \dots \dots \text{formula (2a)}$$

<Conclusion for consideration for SAR test reduction>

- 1) The SAR setups of the near antenna which includes "Front-right", "Front", "Right" and "Back" are applied the SAR test in body-liquid.
- 2) The SAR tests of "Left", "Top" and "Bottom" setup are reduced because there is enough antenna separation distance.
- 3) The antenna section did not touch a human head because of the structure of the camera lens (360 degrees view camera), therefore SAR test for the head was reduced

By the determined test setup shown above, the SAR test was applied in the following procedures.

Step 1	On 2.4GHz band, in body liquid, worst SAR search by DSSS mode with a highest measurement output power channel. Add test for OFDM mode, if it's necessary.
Step 2	On W52 band, in body liquid, worst SAR search by largest channel bandwidth mode with a highest measurement output power channel. Add test for other bandwidth mode, if it's necessary.

*. During SAR test, the radiated power is always monitored by Spectrum Analyzer.

SECTION 4: Operation of EUT during testing

4.1 Operation mode for SAR testing

The EUT has Bluetooth (BDR, EDR, Low energy) and IEEE 802.11b, g, a, n(20HT), n(40HT), ac(20VHT), ac(40VHT) and ac(80VHT) continuous transmitting modes. The frequency and the modulation used in the SAR testing are shown as a following.

Operation mode	BDR	EDR	LE	b		g	n20	a	n20	ac20	n40	ac40	ac80	
band	Bluetooth			2.4GHz band						U-NII-1(W52)				
Tx band [MHz]	2402~2480			2412~2462						5180~5240		5190, 5230		5210
Bandwidth [MHz]	1	1	2	20		20	20	20	20	20	40	40	80	
Max.power [dBm]	4	4	4	14		14	14	14	14	14	14	14	14	
Modulation	FHSS	FHSS	FHSS	DSSS		OFDM	OFDM	OFDM	OFDM	OFDM	OFDM	OFDM	OFDM	
Data rate [Mbps]	1	-	1	1	5.5Short	6	MCS0	MCS0	6	MCS0	MCS0	MCS0	MCS0	
Frequency tested [MHz]	2441 (*1)	n/a	n/a	2412, 2437, 2462	2412 (*1)	2412, 2437, 2462	2412, 2437, 2462	5180, 5220, 5240	5180, 5220, 5240	5180, 5220, 5240	5190, 5230	5190, 5230	5210	
Controlled software	Bluetooth operation: Bluetooth test: RICOH BT RF TEST Version 4 / Wi-Fi operation: RICOH BT WLAN TEST Version 4 (Firmware version of RICOH THETA V: 00500000.)													

*. n/a: SAR test was not applied.

*1. This channel has a highest measured average output power.

SAR test reduction consideration

[Table 1. Output power and Body-SAR test channel selection and Reported SAR(1g) [W/kg] (Results) and test reduction plan]

802.11 Modes	b	g	n(20HT)	a	n(20HT)	ac(20HT)	n(40HT)	ac(40VHT)	ac(80VHT)
Data rate [Mbps]	1	6	MCS0	6	MCS0	MCS0	MCS0	MCS0	MCS0
2.4GHz, Ch.	1/6/11	1/6/11	1/6/11						
Max. power [mW]	32/32/32	32/32/32	32/32/32						
Measured Ave. [mW]	24/23/23	24/24/23	24/24/24						
Reported SAR 1g	1.25/1.21/1.21	1.26/1.19/1.20	1.28/1.22/1.20						
W52, Ch.				36/40/44/48	36/40/44/48	36/40/44/48	38/46	38/46	42
Max. power [mW]				32/32/32/32	32/32/32/32	32/32/32/32	32/32	32/32	32
Measured Ave. [mW]				24/24/25/24	25/24/24/25	25/24/24/25	24/24	24/24	25
Reported SAR 1g				1.32/1.37/1.40	1.32/1.34/1.40	1.29/1.38/1.37	1.31/1.35	1.32/1.35	1.41

SECTION 5: Uncertainty Assessment (SAR measurement)


Uncertainty of SAR measurement (2.4-6GHz) (*:ε&σ: ≤±5%, DAK3.5, Tx: ≈100% duty cycle) (v08)	1g SAR	10g SAR
Combined measurement uncertainty of the measurement system (k=1)	± 13.7%	± 13.6%
Expanded uncertainty (k=2)	± 27.4%	± 27.2%

	Error Description (2.4-6GHz) (v08)	Uncertainty Value	Probability distribution	Divisor	ci (1g)	ci (10g)	ui (1g) (std. uncertainty)	ui (10g) (std. uncertainty)	Vi, veff
A	Measurement System (DASY5)								
1	Probe Calibration Error	±6.55 %	Normal	1	1	1	±6.55 %	±6.55 %	∞
2	Axial isotropy Error	±4.7 %	Rectangular	√3	√0.5	√0.5	±1.9 %	±1.9 %	∞
3	Hemispherical isotropy Error	±9.6 %	Rectangular	√3	√0.5	√0.5	±3.9 %	±3.9 %	∞
4	Linearity Error	±4.7 %	Rectangular	√3	1	1	±2.7 %	±2.7 %	∞
5	Probe modulation response	±2.4 %	Rectangular	√3	1	1	±1.4 %	±1.4 %	∞
6	Sensitivity Error (detection limit)	±1.0 %	Rectangular	√3	1	1	±0.6 %	±0.6 %	∞
7	Boundary effects Error	±4.3%	Rectangular	√3	1	1	±2.5 %	±2.5 %	∞
8	Readout Electronics Error(DAE)	±0.3 %	Rectangular	√3	1	1	±0.3 %	±0.3 %	∞
9	Response Time Error	±0.8 %	Normal	1	1	1	±0.8 %	±0.8 %	∞
10	Integration Time Error (≈100% duty cycle)	±0 %	Rectangular	√3	1	1	0 %	0 %	∞
11	RF ambient conditions-noise	±3.0 %	Rectangular	√3	1	1	±1.7 %	±1.7 %	∞
12	RF ambient conditions-reflections	±3.0 %	Rectangular	√3	1	1	±1.7 %	±1.7 %	∞
13	Probe positioner mechanical tolerance	±3.3 %	Rectangular	√3	1	1	±1.9 %	±1.9 %	∞
14	Probe Positioning with respect to phantom shell	±6.7 %	Rectangular	√3	1	1	±3.9 %	±3.9 %	∞
15	Max. SAR evaluation (Post-processing)	±4.0 %	Rectangular	√3	1	1	±2.3 %	±2.3 %	∞
B	Test Sample Related								
16	Device Holder or Positioner Tolerance	±3.6 %	Normal	1	1	1	±3.6 %	±3.6 %	5
17	Test Sample Positioning Error	±5.0 %	Normal	1	1	1	±5.0 %	±5.0 %	145
18	Power scaling	±0%	Rectangular	√3	1	1	±0 %	±0 %	∞
19	Drift of output power (measured, <0.2dB)	±2.3%	Rectangular	√3	1	1	±2.9 %	±2.9 %	∞
C	Phantom and Setup								
20	Phantom uncertainty (shape, thickness tolerances)	±7.5 %	Rectangular	√3	1	1	±4.3 %	±4.3 %	∞
21	Algorithm for correcting SAR (ε,σ: ≤5%)	±1.2 %	Normal	1	1	0.84	±1.2 %	±0.97 %	∞
22	Measurement Liquid Conductivity Error (DAK3.5)	±3.0 %	Normal	1	0.78	0.71	±2.3 %	±2.1 %	7
23	Measurement Liquid Permittivity Error (DAK3.5)	±3.1 %	Normal	1	0.23	0.26	±0.7 %	±0.8 %	7
24	Liquid Conductivity-temp.uncertainty (≤2deg.C.)	±5.3 %	Rectangular	√3	0.78	0.71	±2.4 %	±2.2 %	∞
25	Liquid Permittivity-temp.uncertainty (≤2deg.C.)	±0.9 %	Rectangular	√3	0.23	0.26	±0.1 %	±0.1 %	∞
	Combined Standard Uncertainty						±13.7 %	±13.6 %	733
	Expanded Uncertainty (k=2)						±27.4 %	±27.2 %	

*. Table of uncertainties are listed for ISO/IEC 17025.

*. This measurement uncertainty budget is suggested by IEEE Std.1528(2013) and determined by Schmid & Partner Engineering AG (DASY5 Uncertainty Budget). Per KDB 865664 D01 (v01r04) SAR Measurement 100 MHz to 6 GHz Section 2.8.1., when the highest measured SAR(1g) within a frequency band is < 1.5W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std.1528 (2013) is not required in SAR reports submitted for equipment approval.

*. Chart of the worst cycle for each operation mode.

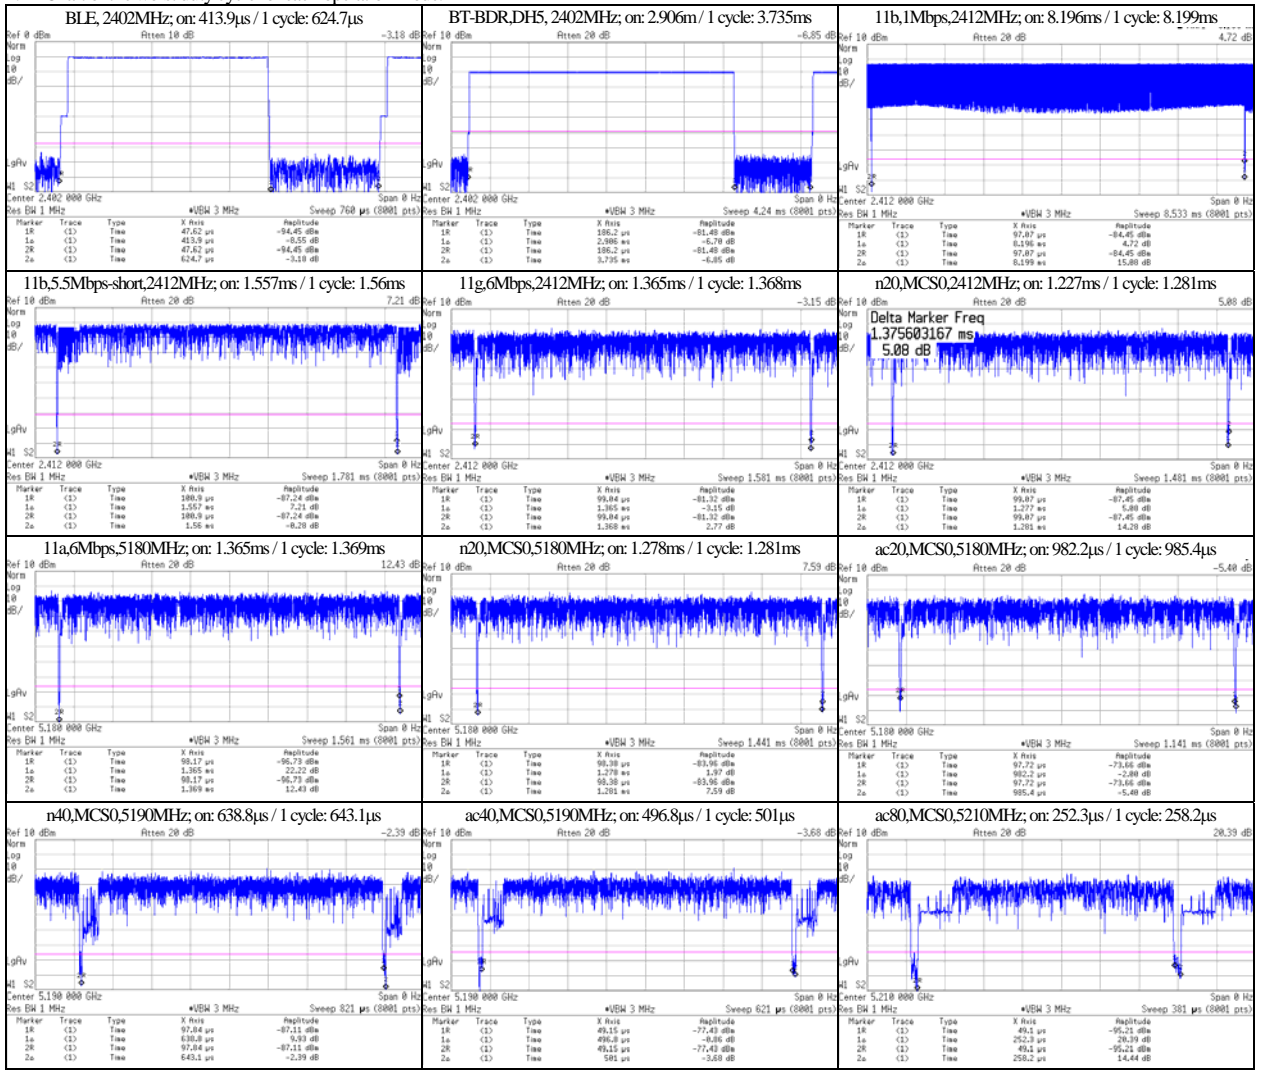

*. CH: channel, Max: Maximum.

*. Calculating formula: Result-Time average power (dBm) = (P/M Reading, dBm)+(Cable loss, dB)+(Attenuator, dB)
 Result-Burst power (dBm) (*.equal to 100% duty cycle) = (P/M Reading, dBm)+(Cable loss, dB)+(Attenuator, dB)+(duty factor, dB)
 Duty factor (dBm) = 10 × log (100/(duty cycle, %))
 Δ form max. (dB) = (Results-Burst power (average, dBm)) - (Max.-specification output power (average, dBm))
 Duty scaled factor (Duty cycle correction factor for obtained SAR value) (unit: (-)) = 100(%) / (duty cycle, %)
 Tune-up factor (Power tune-up factor for obtained SAR value) (unit: (-)) = 1 / (10 ^ ("Deviation from max., dB" / 10))

*. Date measured: May 8 and 9, 2017 / Measured by: Hiroshi Naka / Place: preparation room of No. 7 shielded room. ((25±1) deg.C. / (40-50) %RH)

*. Uncertainty of antenna port conducted test; Power measurement uncertainty above 1GHz for this test was: (±) 0.72 dB(Average)/(±) 0.85 dB(Peak).

*. Uncertainty of antenna port conducted test; Duty cycle and time measurement: (±) 0.012 %.

SECTION 7: SAR Measurement results

7.1 SAR measurement results

Measurement date: May 12~17, 2017

Measurement by: Hiroshi Naka

[Liquid measurement]

Frequency [MHz] (Channel)	Liquid type	Liquid parameters (*a)							ASAR Coefficients(*b)		Date measured			
		Permittivity (εr) [-]			Limit	Conductivity [S/m]			Temp. [deg.C.]	Depth [mm]		ASAR 1g [%]	Correction required?	
		Target	Measured			Target	Measured							Limit
2412 (1)	Body	52.75	50.54	-4.2	-5% ≤ εr-meas. ≤ 0%	1.914	1.941	+1.5	0% ≤ σ-meas. ≤ +5%	22.4	151	+1.65	not required.	May 12, 2017, before SAR test
2437 (6)		52.72	50.46	-4.3		1.938	1.968	+1.6				+1.71	not required.	
2462 (11)		52.68	50.30	-4.5		1.967	2.011	+2.3				+2.09	not required.	
2412 (1)	Body	52.75	50.70	-3.9	-5% ≤ εr-meas. ≤ 0%	1.914	1.935	+1.1	0% ≤ σ-meas. ≤ +5%	22.5	152	+1.42	not required.	May 17, 2017, before SAR test
2437 (6)		52.72	50.60	-4.0		1.938	1.970	+1.7				+1.70	not required.	
2462 (11)		52.68	50.46	-4.2		1.967	2.005	+1.9				+1.87	not required.	
2441(39)	Body	52.71	50.59	-4.0	-5% ≤ εr-meas. ≤ 0%	1.941	1.975	+1.7	0% ≤ σ-meas. ≤ +5%	23.3	151	+1.73	not required.	May 15~16, 2017 (*1), before SAR test
5180 (36)		49.04	47.17	-3.8		5.276	5.429	+2.9				+0.70	not required.	
5190 (38)		49.03	47.28	-3.6		5.288	5.437	+2.8				+0.65	not required.	
5210 (42)		49.00	47.12	-3.9		5.311	5.466	+2.9				+0.63	not required.	
5220 (44)		48.99	47.02	-4.0		5.323	5.480	+3.0				+0.73	not required.	
5230 (46)		48.97	47.16	-3.7		5.334	5.485	+2.8				+0.67	not required.	
5240 (48)		48.96	47.14	-3.7		5.346	5.511	+3.1				+0.66	not required.	

*1. On May 16, it was within 24 hours from measurement on May 15 and same liquid temperature, so measured parameters of May 15 were used continuously

[Measured and Reported (Scaled) SAR results]

Mode	Frequency [MHz] (Channel)	Data rate [Mbps]	SAR measurement results					Reported SAR (1g) [W/kg]					Remarks		
			EUT setup		SAR (1g) [W/kg]			SAR plot # in Appendix 2-2	Duty cycle correction		Output average power correction			SAR Corrected (Scaled) (*d)	
			Position	Gap [mm]	Max. value of multi-peak	Duty [%]	Duty scaled		Meas. [dBm]	Max. [dBm]	Tune-up factor				
Step 1: 2.4GHz Band															
11b	2412(1)	1	Front-right	0	1.18	+1.65	n/a (*c)	Plot 1-2	≈100	×1.00	13.75	14	×1.06	1.251	
				0	1.14	+1.42	n/a (*c)	Plot 1-3	≈100	×1.00	13.75	14	×1.06	1.208	* Battery operation.
				0	0.643	+1.65	n/a (*c)	Plot 1-4	≈100	×1.00	13.75	14	×1.06	0.682	
				0	0.238	+1.65	n/a (*c)	Plot 1-5	≈100	×1.00	13.75	14	×1.06	0.252	
				0	0.135	+1.65	n/a (*c)	Plot 1-6	≈100	×1.00	13.75	14	×1.06	0.143	
	2437(6)	5.5	Front-right	0	1.11	+1.71	n/a (*c)	Plot 1-7	≈100	×1.00	13.64	14	×1.09	1.210	
	2462(11)			0	1.1	+2.09	n/a (*c)	Plot 1-8	≈100	×1.00	13.59	14	×1.10	1.210	
	2412(1)			0	1.21	+1.42	n/a (*c)	Plot 1-9	99.8	×1.00	13.99	14	×1.00	1.210	
	2412(1)			0	1.2	+1.65	n/a (*c)	Plot 1-10	99.8	×1.00	13.80	14	×1.05	1.260	
	2437(6)			0	1.13	+1.71	n/a (*c)	Plot 1-11	99.8	×1.00	13.78	14	×1.05	1.187	
2462(11)	0	1.11	+2.09	n/a (*c)	Plot 1-12	99.8	×1.00	13.68	14	×1.08	1.199				
2412(1)	MCS0	Front-right	0	1.23	+1.65	n/a (*c)	Plot 1-1	99.7	×1.00	13.84	14	×1.04	1.279	Higher Rep.&Meas.-SAR.	
2437(6)			0	1.18	+1.71	n/a (*c)	Plot 1-13	99.7	×1.00	13.86	14	×1.03	1.215		
2462(11)			0	1.15	+2.09	n/a (*c)	Plot 1-14	99.7	×1.00	13.84	14	×1.04	1.196		
BDR	2441(39)	DH5	0	0.108	+1.73	n/a (*c)	Plot 1-15	77.8	×1.00	3.66	4	×1.08	0.117	* Estimated SAR (1g) value is "0.126 W/kg" (Clause 7.3)	
Step 2: W52 Band															
ac(80VHT)	5210(42)	MCS0	Front-right	0	1.13	+0.63	n/a (*c)	Plot 2-1	97.7	×1.02	13.13	14	×1.22	1.406	Higher Rep.-SAR.
				0	0.999	+0.63	n/a (*c)	Plot 2-2	97.7	×1.02	13.13	14	×1.22	1.243	* Battery operation.
				0	0.563	+0.63	n/a (*c)	Plot 2-3	97.7	×1.02	13.13	14	×1.22	0.701	
				0	0.147	+0.63	n/a (*c)	Plot 2-4	97.7	×1.02	13.13	14	×1.22	0.183	
n(40HT)	5190(38)	MCS0	Front-right	0	1.25	+0.65	n/a (*c)	Plot 2-6	99.3	×1.01	13.84	14	×1.04	1.313	
	5230(46)			0	1.3	+0.67	n/a (*c)	Plot 2-7	99.3	×1.01	13.87	14	×1.03	1.352	
ac(40VHT)	5190(38)	MCS0	Front-right	0	1.26	+0.65	n/a (*c)	Plot 2-8	99.2	×1.01	13.82	14	×1.04	1.324	
	5230(46)			0	1.28	+0.67	n/a (*c)	Plot 2-9	99.2	×1.01	13.85	14	×1.04	1.345	
11a	5180(36)	6	Front-right	0	1.28	+0.70	n/a (*c)	Plot 2-10	99.7	×1.00	13.86	14	×1.03	1.318	
	5220(44)			0	1.34	+0.73	n/a (*c)	Plot 2-11	99.7	×1.00	13.90	14	×1.02	1.367	
	5240(48)			0	1.36	+0.66	n/a (*c)	Plot 2-12	99.7	×1.00	13.87	14	×1.03	1.401	
n(20HT)	5180(36)	MCS0	Front-right	0	1.31	+0.70	n/a (*c)	Plot 2-13	99.8	×1.00	13.97	14	×1.01	1.323	
	5220(44)			0	1.34	+0.73	n/a (*c)	Plot 2-14	99.8	×1.00	13.98	14	×1.00	1.340	
	5240(48)			0	1.37	+0.66	n/a (*c)	Plot 2-15	99.8	×1.00	13.92	14	×1.02	1.397	Higher Meas.-SAR.
ac(20VHT)	5180(36)	MCS0	Front-right	0	1.29	+0.70	n/a (*c)	Plot 2-16	99.7	×1.00	13.99	14	×1.00	1.290	
	5220(44)			0	1.34	+0.73	n/a (*c)	Plot 2-17	99.7	×1.00	13.86	14	×1.03	1.380	
	5240(48)			0	1.34	+0.66	n/a (*c)	Plot 2-18	99.7	×1.00	13.92	14	×1.02	1.367	

Notes:

- *. Gap: It is the separation distance between the EUT outer surface and the bottom outer surface of phantom; Max.: Maximum; Meas.: Measured value; Rep.: Reported; n/a: not applied;
- *. During test, the EUT was operated with connecting the host pc via USB cable (battery charging).
- *. Calibration frequency of the SAR measurement probe (and used conversion factors)

Liquid	SAR test frequency	Probe calibration frequency	Validity	Conversion factor	Uncertainty
Body	2412, 2437, 2441, 2462 MHz	2450 MHz	within ±50 MHz of calibration frequency	7.38	±12.0 %
Body	5180, 5190, 5210, 5220, 5230, 5240 MHz	5250 MHz	within ±110 MHz of calibration frequency	4.65	±13.1 %

- *. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

Memo1 :

- *a. The target value is a parameter defined in Appendix A of KDB865664 D01 (v01r04), the dielectric parameters suggested are given at 2000, 2450, 3000 and 5800MHz. Parameters for the frequencies between (2000~3000) MHz and (3000~5800) MHz were obtained using linear interpolation.
- *b. Calculating formula: $\Delta SAR(1g) = C_{\sigma} \times \Delta \sigma + C_{\sigma} \times \Delta \sigma$, $C_{\sigma} = 7.854E-4 \times f^3 + 9.402E-3 \times f^2 - 2.742E-2 \times f + 0.2026$ / $C_{\sigma} = 9.804E-3 \times f^3 - 8.661E-2 \times f^2 + 2.981E-2 \times f + 0.7829$
- *c. Since the calculated ΔSAR values of the tested liquid had shown positive correction, the measured SAR was not converted by ΔSAR correction.
Calculating formula: $\Delta SAR \text{ corrected SAR (W/kg)} = (\text{Meas. SAR (W/kg)}) \times (100 - (\Delta SAR(\%))) / 100$
- *d. Calculating formula: $\text{Reported SAR (W/kg)} = (\text{Measured SAR (W/kg)}) \times (\text{Duty scaled}) \times (\text{Tune-up factor})$
Duty scaled = Duty scaled factor: Duty cycle correction factor for obtained SAR value, Duty scaled factor [-] = 100% / (duty cycle, %)
Tune-up factor: Power tune-up factor for obtained SAR value, Tune-up factor [-] = $1 / (10^{(Deviation from max., dB)} / 10)$

Memo2 :

(Clause 5.2, 2.4GHz SAR Procedures for 2.4GHz band DSSS and OFDM, in KDB248227 D01 (v02r02))

5.2.1 802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel (section 3.1) for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

5.2.2 2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3, including sub-sections). SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

(Clause 5: SAR TEST PROCEDURE for 5GHz OFDM band, in KDB248227 D01 (v02r02))

5.1.1 Initial Test Position SAR Test Reduction Procedure

- 1) When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other (remaining) test positions in that exposure configuration and 802.11 transmission mode combination within the frequency band or aggregated band. SAR is also not required for that exposure configuration in the subsequent test configuration(s).
- 2) When the reported SAR of the initial test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position using subsequent highest extrapolated or estimated 1-g SAR conditions determined by area scans or next closest/smallest test separation distance and maximum RF coupling test positions based on manufacturer justification, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions (left, right, touch, tilt or subsequent surfaces and edges) are tested.
- 3) For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

7.2 SAR Measurement Variability

In accordance with published RF Exposure KDB procedure 865664 D01 (v01r04) SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Mode	Frequency [MHz]	Data rate	EUT setup position	Measured SAR (1g) [W/kg]		Largest to Smallest SAR Ratio	SAR plot # in Appendix 2-2	Remarks
				Original	Repeated			
n(20HT)	2412 (1ch)	MCS0	Front-right	1.23	1.21	1.017	Original: Plot 1-1 Repeated: Plot 3-1	*. 2 nd repeated measurement is not required since the ratio of the largest to smallest SAR for the original and 1 st repeated measurement is not > 1.20 .
n(20HT)	5240 (46ch)	MCS0	Front-right	1.37	1.36	1.007	Original: Plot 2-15 Repeated: Plot 3-2	*. 2 nd repeated measurement is not required since the ratio of the largest to smallest SAR for the original and 1 st repeated measurement is not > 1.20 .

7.3 Simultaneous transmission evaluation

This Wireless module supports both Wi-Fi and Bluetooth. Wi-Fi of 2.4GHz and Bluetooth were not transmitted simultaneously. Wi-Fi of 5GHz and Bluetooth were transmitted simultaneously at same antenna. Therefore simultaneously transmitted SAR was only considered for Wi-Fi of 5GHz band operation.

Test position	Simultaneous transmission scenario			Σ1g SAR [W/kg] (≤1.6)	SPLSR (Yes / No)	Calculated distance [mm]	SPLSR (≤ 0.04)	Volume Scan (Yes/No)	Figure	Remarks
	Highest Reported SAR(1g) [W/kg] (Standalone base)									
	Wi-Fi: DTS Band	Wi-Fi: UNII band	Bluetooth (BT)							
Front-right	-	1.41	0.13 (* Estimated)	1.54	No	-	-	-	-	Wi-Fi(W52)+BT

General Note:

- Bluetooth and Wi-Fi share the same antenna, and cannot transmit simultaneously on 2.4GHz band.
- EUT will choose either Wi-Fi of 2.4GHz or 5GHz according to the network signal condition, therefore, Wi-Fi of 2.4GHz and 5GHz will not operate simultaneously.
- The Reported SAR simulation is calculated based on the same configuration and test position.
- Per KDB447498 D01(v06), simultaneously transmission SAR is compliant if;
 - Reported SAR summation < 1.6 W/kg
 - "SPLSR = (SAR1 + SAR2)^{1.5} / (minimum antenna separation distance, mm)", and the peak separation distance is determined from the square root of [(x1-x2)² + (y1-y2)² + (z1-z2)²], where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR location in the zoom scan. (where; "SAR1" is simulated SAR(1g) of Bluetooth, "SAR2" is highest reported SAR(1g) on antenna when it is 5GHz Wi-Fi operated.)
 - if SPLSR ≤ 0.04, simultaneously transmission SAR measurement is not necessary.
 - Simultaneously transmission SAR, and the reported multi-band SAR < 1.6 W/kg.
- For simultaneously transmission analysis, Bluetooth SAR is estimated per KDB447498 D01(v06) based on the formula below.
 - [(max. power of channel, including tune-up tolerance, mW) / (minimum test separation distance, mm)]^x / [√ f(GHz)/x] W/kg, for test separation distances ≤ 50 mm; where x = 7.5 for 1-g SAR and x = 18.75 for 10-g SAR
 - When the minimum separation distance is < 5mm, the distance is used 5mm to determine SAR test exclusion.
 - Bluetooth estimated SAR is conservatively determined by 5mm separation, for all applicable exposure positions.

Maximum power	Exposure Position	Minimum separation distance	Estimated SAR(BT)	Remarks
4 dBm (3 mW) (Bluetooth)	All SAR test setup	< 5mm for all SAR test setup	0.126 W/kg	Actual measured reported SAR(1g) value was "0.117 W/kg". Refer to clause 7.1 and Plot 1-15.

$$\text{Estimated SAR(BT)} = (3\text{mW}) / (5\text{mm})^* (\sqrt{2.480\text{GHz}} / (7.5)) = 0.126 \text{ W/kg}$$

7.4 Device holder perturbation verification

When the highest reported SAR of an antenna is > 1.2 W/kg, holder perturbation verification is required for each antenna, using the highest SAR configuration among all applicable frequency bands.

[Device holder perturbation verification; Measured and Reported (Scaled) SAR results]

Mode	Frequency [MHz] (Channel)	Data rate [Mbps]	SAR measurement results					Reported SAR (1g) [W/kg]						Remarks	
			EUT setup		SAR (1g) [W/kg]			Duty cycle correction		Output average power correction			SAR Corrected (Scaled) (%d)		
			Position	Gap [mm]	Max. value of multi-peak	ASAR [%]	ASAR corrected	SAR plot # in Appendix 2-2	Duty [%]	Duty scaled	Meas. [dBm]	Max. [dBm]			Tune-up factor
With device holder															
n(20HT)	2412(1)	MCS0	Front-right	0	1.23	+1.65	n/a (%c)	Plot 1-1	99.7	×1.00	13.84	14	×1.04	1.279	Higher Rep.&Meas.-SAR.
ac(80HT)	5210(42)	MCS0	Front-right	0	1.13	+0.63	n/a (%c)	Plot 2-1	97.7	×1.02	13.13	14	×1.22	1.406	Higher Rep.-SAR.
No device holder															
n(20HT)	2412(1)	MCS0	Front-right	0	1.22	+1.65	n/a (%c)	Plot 4-1	99.7	×1.00	13.84	14	×1.04	1.269	-
ac(80HT)	5210(42)	MCS0	Front-right	0	1.1	+0.63	n/a (%c)	Plot 4-2	97.7	×1.02	13.13	14	×1.22	1.369	-

[Device holder perturbation verification]

Mode	Frequency [MHz]	Data rate	EUT setup position	Reported SAR (1g) [W/kg]		Device holder perturbation SAR Ratio	Remarks
				Device holder			
				Exist	None		
n(20HT)	2412 (1ch)	MCS0	Front-right	1.279	1.269	- 0.8 %	*.It was smaller than 5% of uncertainty of the setup, so influence of a device holder was judged to be no problem.
ac(80VHT)	5210 (42ch)	MCS0	Front-right	1.406	1.369	- 2.6 %	*.It was smaller than 5% of uncertainty of the setup, so influence of a device holder was judged to be no problem.

*. Calculating formula: Device holder perturbation SAR Ratio (%) = {((Reported SAR-none (W/kg)) / Reported SAR-exist (W/kg)) - 1} * 100