



TEST REPORT

REPORT NUMBER : AKL-199374
APPLICANT : RICOH COMPANY, LTD.
MODEL NUMBER : MP7080A
FCC ID : BBP7080A
REGULATION : FCC Part15B Class B
Canada ICES-003 Class B

Conducted Emission Test
Radiated Emission Test



NVLAP accreditation is valid only
FCC Part15(Digital Devices),
CISPR22, and AS/NZS 3548
test reports.

Akzo Kashima Limited
EMC Division
Kashima Site

1, Oaza Sunayama, Hasaki-machi, Kashima-gun
Ibaraki-ken, 314-0255 Japan
Tel.: +81 479 40 1097 Fax.: +81 479 46 1788

TABLE OF CONTENTS

	Page
ABBREVIATIONS	3
SECTION 1. TEST CERTIFICATION	4
SECTION 2. CONCLUSION	5
SECTION 3. EQUIPMENT UNDER TEST	6
SECTION 4. SUPPORT EQUIPMENT USED	7
SECTION 5. CABLE (S) USED	8
SECTION 6. CONSTRUCTION OF EQUIPMENT	9
SECTION 7. OPERATING CONDITIONS	10
SECTION 8. TEST PROCEDURE(S)	11
SECTION 9. EVALUATION OF TEST RESULTS	16
SECTION 10. PHOTOGRAPHS OF MAXIMUM EMISSION SET-UP	21
SECTION 11. INSTRUMENTS USED FOR FINAL TEST	22
SECTION 12. UNCERTAINTY OF MEASUREMENT	23
SECTION 13. VALIDITY OF TEST REPORT	24
SECTION 14. DESCRIPTION OF TEST LABORATORY	25

ABBREVIATIONS

LISN = Line Impedance Stabilization Network

AMN = Artificial Mains Network

ANT = Antenna

BBA = Broad-band Antenna

DIP = Dipole Antenna

AMP = Amplifier

ATT = Attenuator

EUT = Equipment Under Test

Q-P = Quasi-peak

AVG = Average

SECTION 1. TEST CERTIFICATION**APPLICANT INFORMATION**

Company : RICOH COMPANY, LTD.
Address : 3-2-3, Shin-yokohama, Kohoku-ku, Yokohama-shi, Kanagawa-ken,
222-8530 Japan
Telephone number : +81 45 477 1663
Fax number : +81 45 477 1649

DESCRIPTION OF TEST ITEM

Kind of equipment : Compact Disc Rewritable Drive
Condition of equipment : Pre-Production
Type : Table-Top (Built-in type)
Trademark : RICOH
FCC ID : BBP7080A
Model number : MP7080A
Serial number : DVT-21

TEST PERFORMED

Location : Kashima No. 1 Test Site (FCC File No. : 31040/SIT)
EUT received : October 12, 1999
Test started : October 13, 1999
Test completed : October 13, 1999
Purpose of test : FCC Docket 87-389
and Canadian Interference-Causing Equipment Regulations
Regulation : FCC Part15B Class B and Canada ICES-003 Class B
Unintentional Radiators
Test setup : ANSI C63.4-1992

Report file number : AKL-199374
Report issue date : October 14, 1999
Test engineer : Kenichi Takagi
Report approved by : Junichi Okada
[Site Manager]



This equipment complies with above standard or regulation under the test condition or test configuration shown on this test report.

SECTION 2. CONCLUSION

This test report clearly shows that the EUT is in compliance with the FCC Part 15B Class B specification and the Canada ICES-003 Class B specification.

Traceability to national standards of test result is achieved by means of calibration traceability to national standards.

The minimum margins to the limits are as follows:

Conduction measurement				
Write mode	12.1 dB	at	5.1980 MHz	
Radiation measurement				
Write mode	4.0 dB	at	801.86 MHz	

Note : See Section 9 for details.

SECTION 3. EQUIPMENT UNDER TEST

The equipment under test (EUT) consisted of the following equipment.
Indication in the following left side column corresponds to Section 6.

Symbol	Item	Model No.	Serial No.	FCC ID / DoC	Manufacturer	Remarks
A)	Compact Disc Rewritable Drive	MP7080A	DVT-21	BBP7080A	RICOH COMPANY, LTD.	

Power ratings of EUT : DC 5V, 2A
DC 12V, 1A

DoC : Device for Declaration of Conformity

3.1 Port(s)/Connector(s) :

Port name	Connector type	Connector pin	Remarks
Headphone	Mini-Jack	1 pin	
ATAPI	Pin Header	40 pin	
Audio Out (Analog)	Pin Header	4 pin	
Audio Out (Digital)	Pin Header	2 pin	

3.2 Oscillator(s)/Crystal(s) :

Oscillator	Operating frequency	Board name	Remarks
24.00 MHz	24.00 MHz	Main PCB	
33.86 MHz	33.86 MHz	Main PCB	
260 MHz	260 MHz	Pickup Module	Highest frequency

SECTION 4. SUPPORT EQUIPMENT USED

The EUT was supported by the following equipment during the test. Indication in the following left side column corresponds to Section 6.

Symbol	Item	Model No.	Serial No.	FCC ID / DoC	Manufacturer	Remarks
B)	Computer	PROLINEA 575	00146555	CNT75MDB6V 5	Compaq	
C)	CRT Display	85121-001	72-0736575	ANO7NF8512	IBM	
D)	Printer	2225C+	2950S64811	DSI6XU2225	Hewlett Packard	
E)	Modem	OPTIMA288	AO125240K346	BFJ5201AM	Hayes	
F)	Keyboard	RT6674TJP	82151364	AQ6-MTN4C15	Compaq	
G)	Mouse	M-S28	None	DZL210513	Compaq	
H)	Headphone	MDR-CD1700	None	N.A.	SONY	
I)	AC Adapter	82241AJ	None	N.A.	Hewlett Packard	
J)	AC Adapter	TRAC288	None	N.A.	RICOH COMPANY, LTD.	

DoC : Device was tested and authorized under a Declaration of Conformity to the applicable FCC rules.

SECTION 5. CABLE (S) USED

The following cable(s) was used for the test.

Indication number in the following left side column corresponds to Section 6.

Number	Name	Length	Shield	Connector
1)	Headphone cable	2.80 m	None	Metal
2)	RS-232C cable	1.50 m	Yes	Metal
3)	Printer cable	1.50 m	Yes	Metal
4)	Keyboard cable	1.90 m	Yes	Plastic
5)	Mouse cable	1.80 m	Yes	Plastic
6)	CRT Video cable	1.80 m	Yes	Metal
7)	Power cord for Computer	2.30 m	None	
8)	Power cord for CRT Display	1.80 m	None	
9)	Power cord for Printer	2.00 m	None	
10)	Power cord for Modem (AC)	0.85 m	None	
11)	Power cord for Modem (AC)	1.75 m	None	


Note :

- a. No ferrite core is attached to the outer cables.

SECTION 6. CONSTRUCTION OF EQUIPMENT

The construction of EUT during the test was as follows.

System configuration

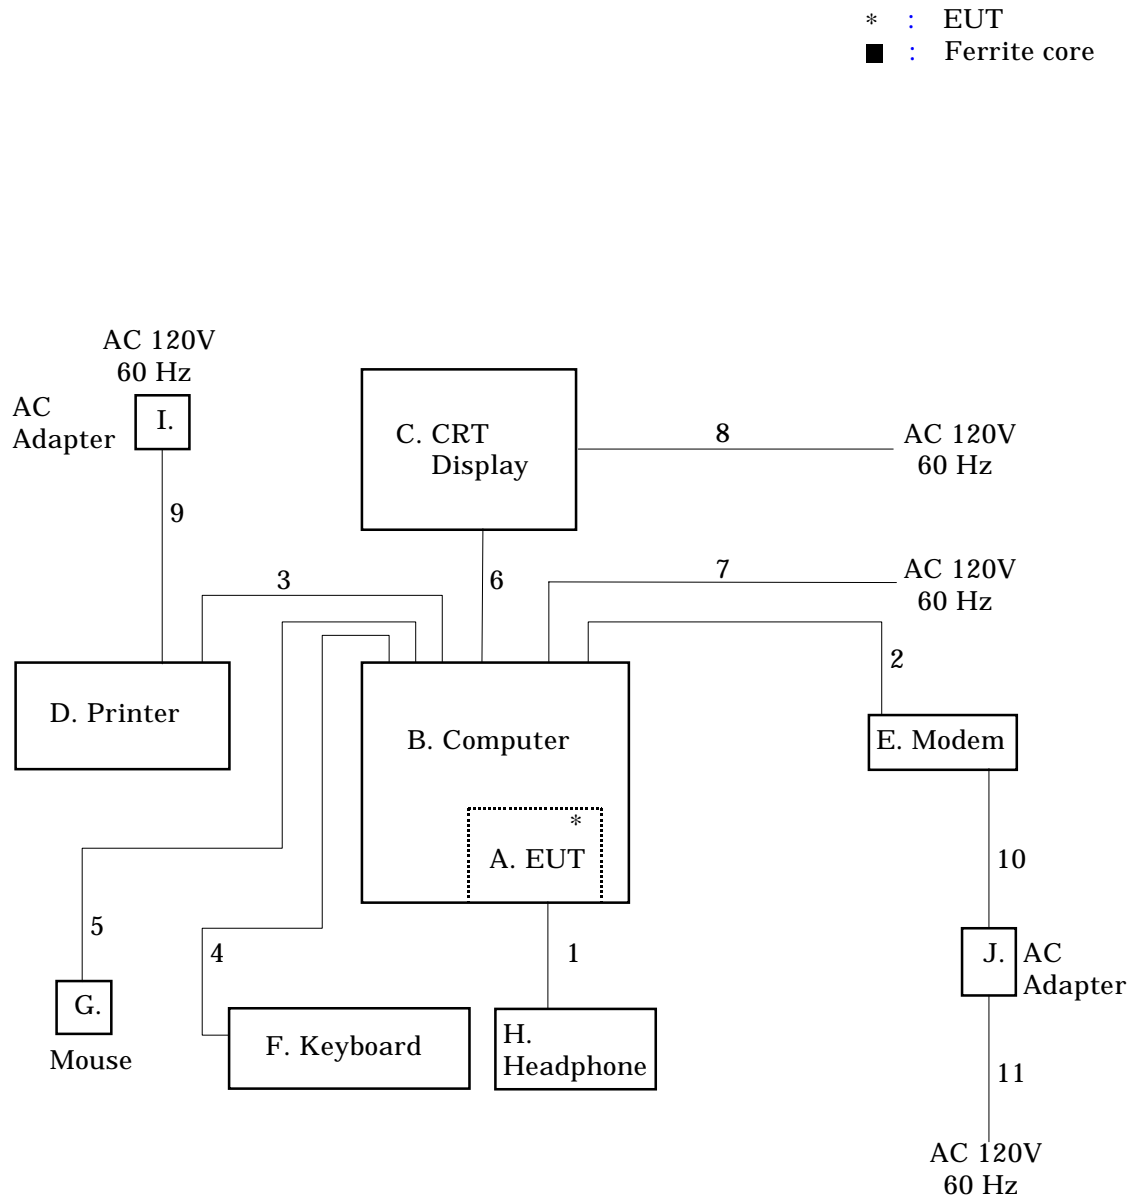

Symbols or numbers assigned to equipment or cables on this diagram are corresponded to the symbols or numbers assigned to equipment or cables on tables in Sections 3 to 5.

SECTION 7. OPERATING CONDITIONS

The EUT was operated under the following conditions during the test.


7.1 Operating condition

The test was carried out under Read mode and Write mode.
EUT was examined in the operating conditions that had maximum emissions.


7.2 Operating flow

Following operations were performed continuously.

7.2.1 Read mode

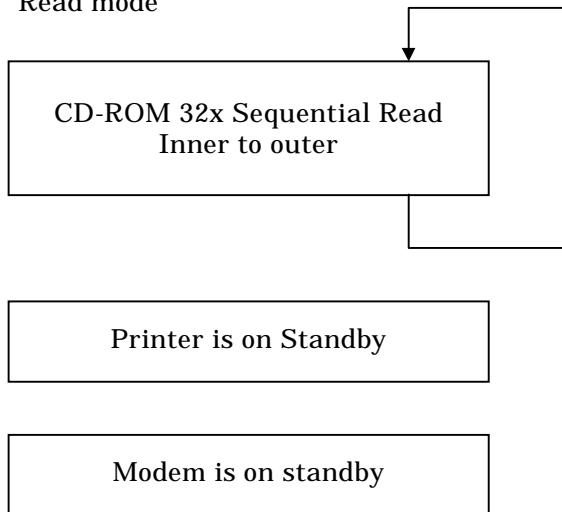

7.2.2 Write mode

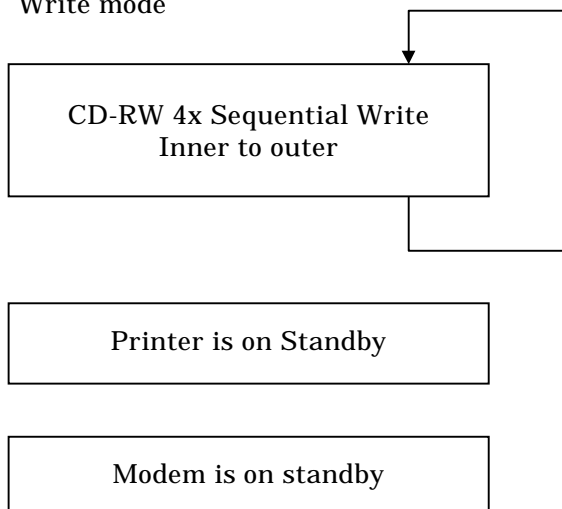


SECTION 8. TEST PROCEDURE(S)

Test was carried out under the following conditions.



Test was carried out with no deviations from standards and test methods.

Subject	Test procedure	Scan frequency
Conducted Emission	Akzo Kashima Document number : 03-10-004	0.45 - 30 MHz
Radiated Emission	Akzo Kashima Document number : 03-10-003	30 - 2000 MHz

Schema for the conducted measurement

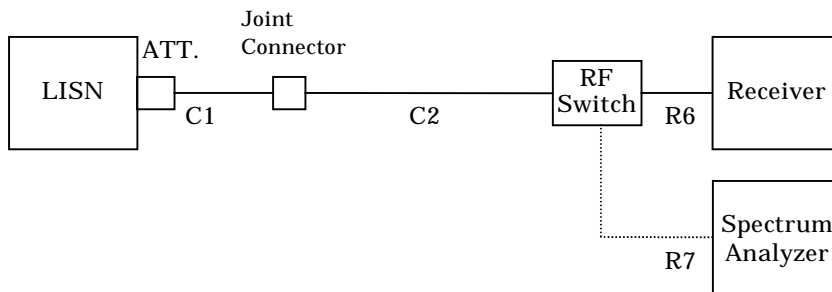

Schema for the radiated measurement

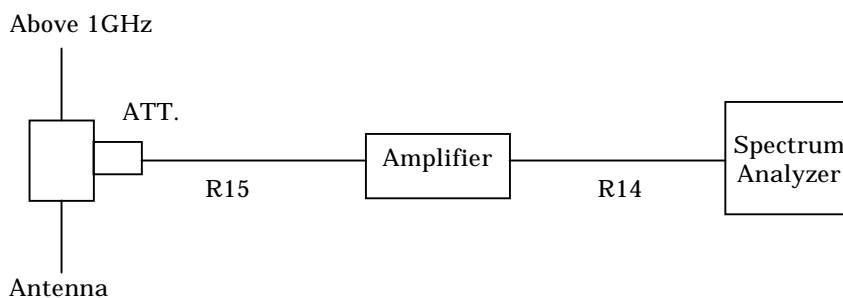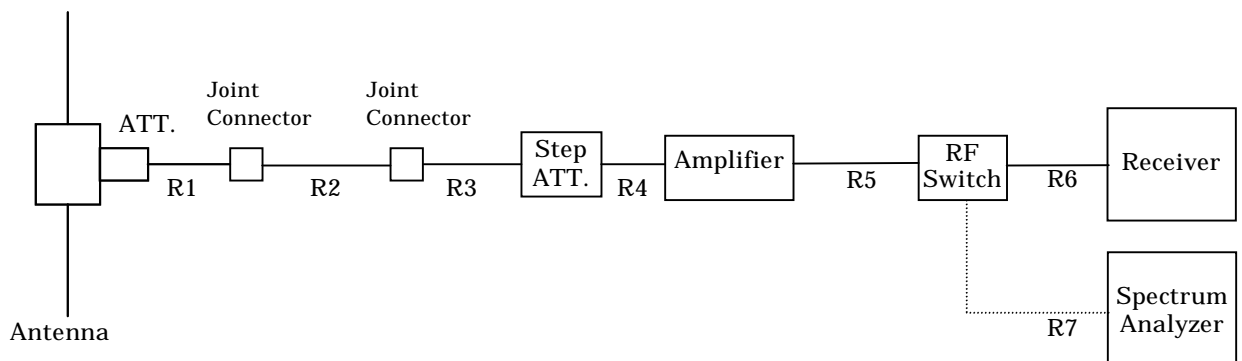

Summary ;

8.1 Conducted Emission Test

8.1.1 Equipment Setup

System configuration and Equipment setup are shown on Section 6 and Section 10.

8.1.1.1 Table-Top Equipment

EUT is placed on the wooden table raised 0.8meter above the metal ground plane.

8.1.1.2 Interconnecting Cables

Excess part of the interconnecting cables longer than 1 meter are bundled in the center. Cables that hang closer than 40 cm to the ground plane is folded back and forth forming bundle 30 to 40 cm long, hanging approx, in the middle between ground plane and table.

8.1.1.3 AC Power Cord

AC power cord for EUT is connected to one LISN which is placed on top of ground plane. The LISN is placed in 80 cm from the nearest part of EUT chassis. The excess power cable is bundled in the center, or shortened to appropriate length. AC cables except from the EUT are connected second LISN.

8.1.2 Measuring Instruments

Measuring instruments list and calibration schedule are shown on Section 11, and brief description are as follows;

8.1.2.1 Spectrum Analyzer

The Spectrum analyzer is used for preliminary measurement.

8.1.2.2 EMI Test Receiver

The Quasi-peak detector(Resolution bandwidth : 10 kHz) and average detector (Resolution bandwidth : 10 kHz) built in test receiver is used for final measurement. The test receiver is complied with the specification of the CISPR publication 16.

8.1.2.3 LISN

The 50 μ H/50 Ω LISN is used. The chassis of the LISN is bonded to the ground plane by the copper blade.

The lead to be tested is selectable by switch, and the terminals which are not connected to the EUT are terminated in 50 Ω resistor termination.

8.1.3 Test Procedure

8.1.3.1 Preliminary Measurement

EUT is tested on all operating conditions.

The spectrum analyzer is controlled by the computer program to sweep regulation frequency, then spectrum chart are plotted out to detect the worst conditions in operating mode and/or configuration for the final test.

All leads other than safety ground are tested.

8.1.3.2 Final Measurement

The EUT is operated in the worst condition where maximum emission is detected by the preliminary test. The equipment and cables are arranged or manipulated within the range of the test standard in the above condition.

The each spectrum to be tested are measured in quasi-peak using the test receiver. When the value in the quasi-peak mode is higher than the limit in the standard, the measurement in the average mode is done to compare to the value in the quasi-peak mode. If the value in the quasi-peak mode exceeds the value in the average mode by more than 6 dB, the value reducing 13 dB from the value in the quasi mode is used to compare to the limit.

8.2 Radiated Emission Test

8.2.1 Equipment Setup

System configuration and Equipment setup are shown on Section 6 and Section 10.

8.2.1.1 Table-Top Equipment

EUT is placed on the wooden table raised 0.8meter above the metal ground plane(turntable).

8.2.1.2 Interconnecting Cables

Excess part of the interconnecting cables longer than 1 meter are bundled in the center. Cables that hang closer than 40 cm to the ground plane is folded back and forth forming bundle 30 to 40 cm long, hanging approx, in the middle between ground plane and table.

8.2.2 Measuring Instruments

Measuring instruments list and calibration schedule are shown on Section 11, and brief description are as follows;

8.2.2.1 Antennas

The broadband Bi-cog antenna is used for measurement on the frequency range 30 – 1000 MHz.

The Double ridged guide antenna is used for frequency higher than 1000 MHz.

If uncertain result was obtained, the broadband antenna is replaced by the half wave length dipole, then measurement is carried out over again.

8.2.2.2 Pre-amplifier

The broadband pre-amplifier is used for radiated emission measurement.

The signal to noise ratio is improved by using pre-amplifier.

8.2.2.3 Spectrum Analyzer

The spectrum analyzer is used for preliminary measurement of frequency range 30 – 1000 MHz, and also used for final measurement of higher than 1000 MHz (Resolution bandwidth : 1 MHz).

8.2.2.4 EMI Test Receiver

The Quasi-peak detector(Resolution bandwidth : 120 kHz) built in test receiver is used for final measurement of the frequency 30 – 1000 MHz.

The test receiver is complied with the specification of the CISPR publication 16.

8.2.2.5 Turntable

The turntable is capable for EUT weight and rotatable 0 to 360 degree horizontally by remote control in the test room.

8.2.2.6 Antenna Mast

The antenna mast is attachable to all antennas described on clause 8.2.2.1 and antenna height is adjustable 1 to 4 meters continuously by remote control at the test room, and antenna polarization is also changed by the remote control.

8.2.3 Test Procedure

8.2.3.1 Preliminary Measurement

EUT is tested on all operating conditions.

The spectrum analyzer is set max-hold mode and swept during turntable was rotated 0 to 360 degree. Then spectrum chart are plotted out to detect the worst conditions in configuration, operating mode, or ambient noise notation.

8.2.3.2 Final Measurement

The EUT operated in the condition where maximum emission is detected in the preliminary test.

The turntable azimuth(EUT direction) and antenna height are adjusted the position so that maximum field strength is obtained for each frequency spectrum to be measured. The equipment and cables are arranged or manipulated within the range of the test standard in the above condition.

When the uncertain result was obtained, the measurement is retried by using the half wave dipole antenna instead of the broadband antenna.


SECTION 9. EVALUATION OF TEST RESULTS

9.1 Conducted Emission Test

9.1.1 Read mode

Akzo Kashima Limited
Kashima No.1 Test site
INTERFERENCE CONDUCTION TEST

APPLICANT : RICOH COMPANY LTD.
 EUT NAME : Compact Disk Rewritable Drive
 MODEL NO. : MP7080A
 SERIAL NO. : DVT-21
 TEST MODE : Read
 POWER SOURCE : DC+5V/2A DC+12V/1A (AC120V/60Hz)
 DATE TESTED : Oct 13 1999
 FILE NO. : AKL-199374
 REGULATION : FCC Part15B CLASS B
 TEST METHOD : ANSI C63.4-1992

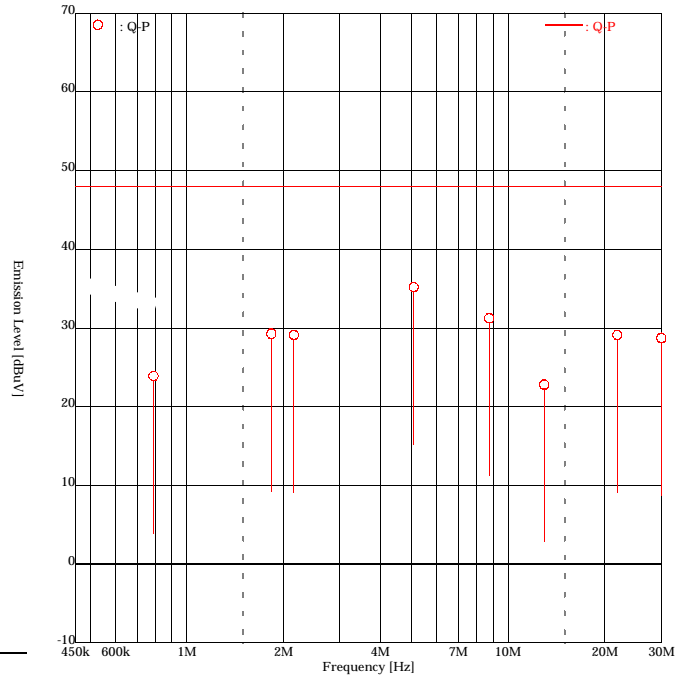

ENGINEER : Kenichi Takagi


FREQUENCY No	[MHz]	READING [dBuV]		FACTOR [dB]		EMISSION [dBuV]		LIMIT [dBuV]	MARGIN [dB]	
		Line1	Line2	Line1	Line2	Line1	Line2		Line1	Line2
1	0.7886	17.8	17.8	6.1	6.1	23.9	23.9	48.0	24.1	24.1
2	1.8372	22.8	22.5	6.4	6.4	29.2	28.9	48.0	18.8	19.1
3	2.1535	22.6	21.9	6.5	6.5	29.1	28.4	48.0	18.9	19.6
4	5.0905	28.4	20.6	6.8	6.8	35.2	27.4	48.0	12.8	20.6
5	8.7430	24.3	24.6	6.6	6.6	30.9	31.2	48.0	17.1	16.8
6	12.9686	14.0	15.9	6.9	6.9	20.9	22.8	48.0	27.1	25.2
7	21.8530	21.9	21.0	7.2	7.2	29.1	28.2	48.0	18.9	19.8
8	29.9833	21.3	20.4	7.4	7.4	28.7	27.8	48.0	19.3	20.2

Higher six points are underlined.
 Other frequencies : Below the FCC Part15B CLASS B limit
 Emission Level = Read + Factor(LISN,Pad,Cable)

9.1.2 Write mode

Akzo Kashima Limited
Kashima No.1 Test site
INTERFERENCE CONDUCTION TEST

APPLICANT : RICOH COMPANY LTD.
 EUT NAME : Compact Disk Rewritable Drive
 MODEL NO. : MP7080A
 SERIAL NO. : DVT-21
 TEST MODE : Write
 POWER SOURCE : DC+5V/2A DC+12V/1A (AC120V/60Hz)
 DATE TESTED : Oct 13 1999
 FILE NO. : AKL-199374
 REGULATION : FCC Part15B CLASS B
 TEST METHOD : ANSI C63.4-1992

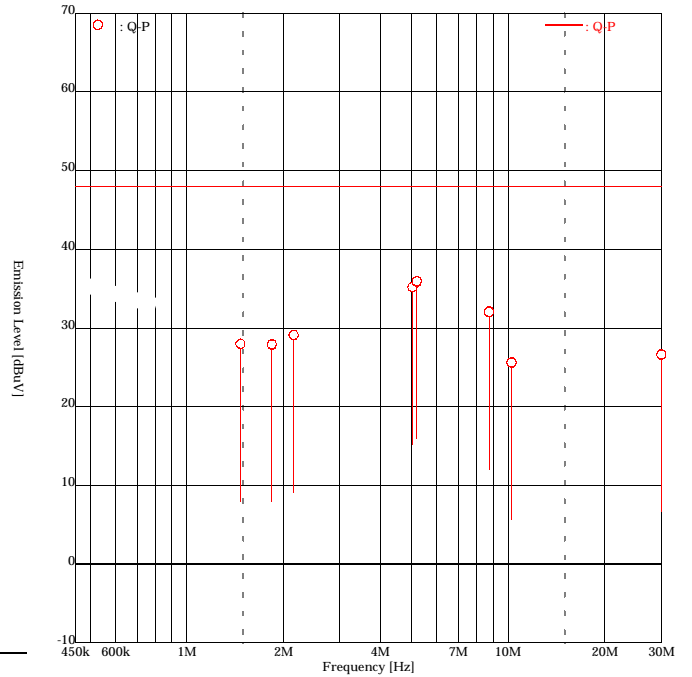

ENGINEER : Kenichi Takagi

FREQUENCY No	[MHz]	READING [dBuV]		FACTOR [dB]		EMISSION [dBuV]		LIMIT [dBuV]	MARGIN [dB]	
		Line1	Line2	Line1	Line2	Line1	Line2		Line1	Line2
1	1.4713	<u>21.7</u>	21.0	6.3	6.3	<u>28.0</u>	27.3	48.0	20.0	20.7
2	1.8400	<u>21.5</u>	21.5	6.4	6.4	<u>27.9</u>	27.9	48.0	20.1	20.1
3	2.1513	<u>22.6</u>	21.8	6.5	6.5	<u>29.1</u>	28.3	48.0	18.9	19.7
4	5.0417	<u>28.4</u>	20.6	6.8	6.8	<u>35.2</u>	27.4	48.0	12.8	20.6
5	5.1980	<u>29.1</u>	20.5	6.8	6.8	<u>35.9</u>	27.3	48.0	12.1	20.7
6	8.7425	<u>25.4</u>	25.3	6.6	6.6	<u>32.0</u>	31.9	48.0	16.0	16.1
7	10.2407	19.0	16.9	6.6	6.6	25.6	23.5	48.0	22.4	24.5
8	29.9857	19.2	18.3	7.4	7.4	26.6	25.7	48.0	21.4	22.3


Higher six points are underlined.
 Other frequencies : Below the FCC Part15B CLASS B limit
 Emission Level = Read + Factor(LISN,Pad,Cable)

9.2 Radiated Emission Test

9.2.1 Read mode

Akzo Kashima Limited
Kashima No.1 Test site
INTERFERENCE RADIATION TEST

APPLICANT : RICOH COMPANY LTD.
 EUT NAME : Compact Disk Rewritable Drive
 MODEL NO. : MP7080A
 SERIAL NO. : DVT-21
 TEST MODE : Read
 POWER SOURCE : DC+5V/2A DC+12V/1A (AC120V/60Hz)
 DATE TESTED : Oct 13 1999
 FILE NO. : AKL-199374
 REGULATION : FCC Part15B CLASS B
 TEST METHOD : ANSI C63.4-1992
 DISTANCE : 3.0 [m]
 TEMPERATURE : 24.0 [degC]
 HUMIDITY : 50.0 [%]

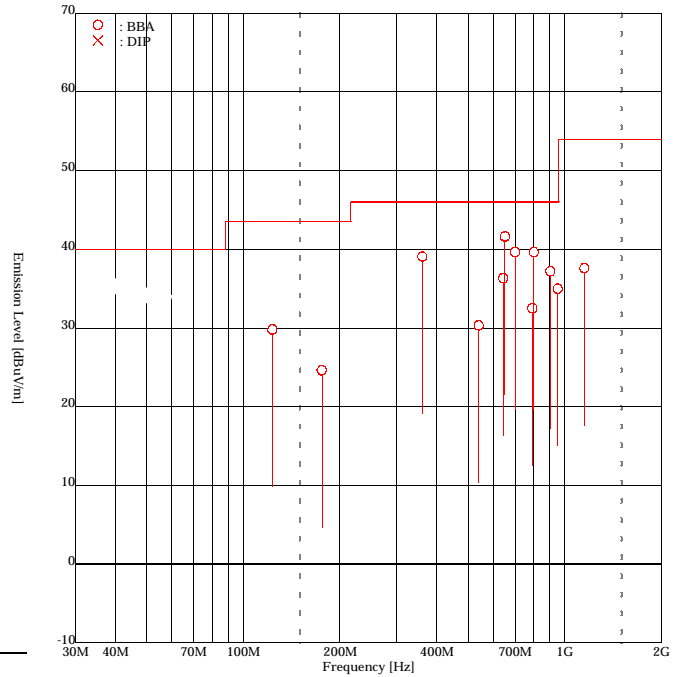

ENGINEER : Kenichi Takagi

FREQUENCY No	ANT. [MHz]	READING [dBuV]		FACTOR [dB]		EMISSION [dBuV/m]		LIMIT [dBuV/m]	MARGIN [dB]		
		Hori	Vert	Hori	Vert	Hori	Vert		Hori	Vert	
1	123.21	BBA	-	38.2	-8.4	-8.4	-	29.8	43.5	-	13.7
2	175.40	BBA	-	33.7	-9.1	-9.1	-	24.6	43.5	-	18.9
3	360.83	BBA	<u>42.3</u>	-	-3.2	-3.2	<u>39.1</u>	-	46.0	<u>6.9</u>	-
4	540.03	BBA	29.3	-	1.0	1.0	30.3	-	46.0	15.7	-
5	644.35	BBA	-	<u>33.4</u>	2.9	2.9	-	<u>36.3</u>	46.0	-	<u>9.7</u>
6	651.51	BBA	33.3	<u>38.5</u>	3.1	3.1	<u>36.4</u>	<u>41.6</u>	46.0	9.6	<u>4.4</u>
7	701.64	BBA	31.9	<u>35.2</u>	4.4	4.4	<u>36.3</u>	<u>39.6</u>	46.0	9.7	<u>6.4</u>
8	793.84	BBA	-	27.2	5.3	5.3	-	32.5	46.0	-	13.5
9	801.87	BBA	31.3	34.1	5.5	5.5	36.8	39.6	46.0	9.2	6.4
10	902.08	BBA	-	<u>30.4</u>	6.8	6.8	-	<u>37.2</u>	46.0	-	<u>8.8</u>
11	952.21	BBA	-	27.5	7.5	7.5	-	35.0	46.0	-	11.0
12	1152.65	BBA	31.0	34.6	3.0	3.0	34.0	37.6	54.0	20.0	16.4

Higher six points are underlined.

Other frequencies : Below the FCC Part15B CLASS B limit


Emission Level = Read + Factor(Antenna, Antenna Pad, Cable, Preamp)

ANT. : Used antenna (BBA = Broadband antenna, DIP = Dipole antenna)

9.2.2 Write mode

Akzo Kashima Limited
Kashima No.1 Test site
INTERFERENCE RADIATION TEST

APPLICANT : RICOH COMPANY LTD.
 EUT NAME : Compact Disk Rewritable Drive
 MODEL NO. : MP7080A
 SERIAL NO. : DVT-21
 TEST MODE : Write
 POWER SOURCE : DC+5V/2A DC+12V/1A (AC120V/60Hz)
 DATE TESTED : Oct 13 1999
 FILE NO. : AKL-199374
 REGULATION : FCC Part15B CLASS B and Canada ICES-003 Class B
 TEST METHOD : ANSI C63.4:1992
 DISTANCE : 3.0 [m]
 TEMPERATURE : 24.0 [degC]
 HUMIDITY : 50.0 [%]

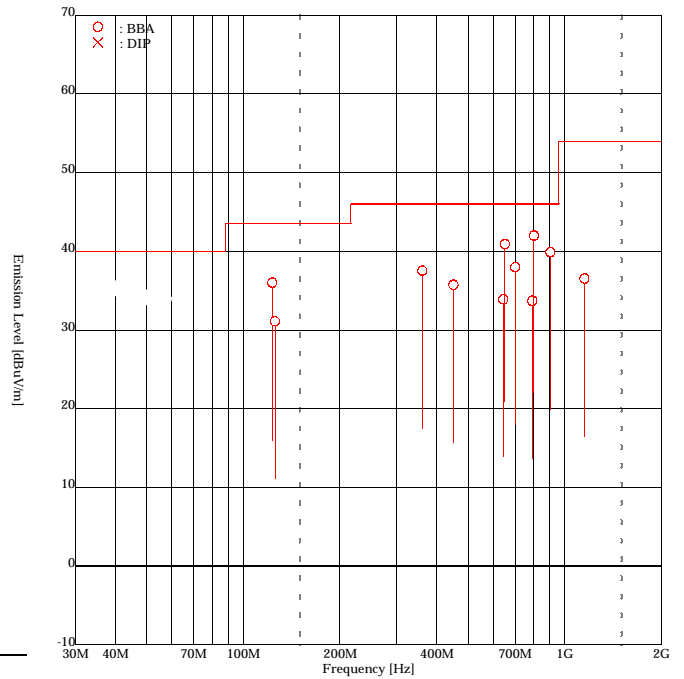

ENGINEER : Kenichi Takagi

FREQUENCY No	ANT. [MHz]	READING [dBuV]		FACTOR [dB]		EMISSION [dBuV/m]		LIMIT [dBuV/m]	MARGIN [dB]		
		Hori	Vert	Hori	Vert	Hori	Vert		Hori	Vert	
1	122.91	BBA	-	44.3	-8.3	-8.3	-	36.0	43.5	-	7.5
2	125.29	BBA	39.7	-	-8.6	-8.6	31.1	-	43.5	12.4	-
3	360.84	BBA	40.7	-	-3.2	-3.2	37.5	-	46.0	8.5	-
4	451.17	BBA	36.5	-	-0.8	-0.8	35.7	-	46.0	10.3	-
5	644.35	BBA	-	31.0	2.9	2.9	-	33.9	46.0	-	12.1
6	651.52	BBA	33.2	37.8	3.1	3.1	36.3	40.9	46.0	9.7	5.1
7	701.61	BBA	32.8	33.6	4.4	4.4	37.2	38.0	46.0	8.8	8.0
8	793.84	BBA	-	28.4	5.3	5.3	-	33.7	46.0	-	12.3
9	801.86	BBA	30.3	36.5	5.5	5.5	35.8	42.0	46.0	10.2	4.0
10	902.09	BBA	-	33.1	6.8	6.8	-	39.9	46.0	-	6.1
11	1152.65	BBA	30.0	33.5	3.0	3.0	33.0	36.5	54.0	21.0	17.5

Higher six points are underlined.

Other frequencies : Below the FCC Part15B CLASS B and Canada ICES-003 Class B limit

Emission Level = Read + Factor(Antenna, Antenna Pad, Cable, Preamp)

ANT. : Used antenna (BBA = Broadband antenna, DIP = Dipole antenna)

9.3 Sample Calculations

9.3.1 Conducted Emission

Example @ 5.1980 MHz

$$\begin{array}{rcl} \text{Emission Level} & = & \text{Meter Reading} & 29.1 \text{ dBuV} \\ & & + \text{Factor} & + \underline{6.8 \text{ dB}} \\ & & & = 35.9 \text{ dBuV} \end{array}$$

$$\begin{array}{rcl} \text{Margin} & = & \text{Limit} & 48.0 \text{ dBuV} \\ & & - \text{Emission Level} & - \underline{35.9 \text{ dBuV}} \\ & & & = 12.1 \text{ dB} \end{array}$$

Factor = LISN Factor + Cable Loss + Pad Loss

9.3.2 Radiated Emission

Example @ 801.86 MHz

$$\begin{array}{rcl} \text{Emission Level} & = & \text{Meter Reading} & 36.5 \text{ dBuV} \\ & & + \text{Factor} & + \underline{5.5 \text{ dB}} \\ & & & = 42.0 \text{ dBuV/m} \end{array}$$

$$\begin{array}{rcl} \text{Margin} & = & \text{Limit} & 46.0 \text{ dBuV/m} \\ & & - \text{Emission Level} & - \underline{42.0 \text{ dBuV/m}} \\ & & & = 4.0 \text{ dB} \end{array}$$

Factor = Antenna Factor + Cable Loss - Amplifier Gain + Pad Loss
- Distance Conversion Factor

SECTION 10. PHOTOGRAPHS OF MAXIMUM EMISSION SET-UP

10.1 Conducted Emission Test

Test setup in accordance with ANSI C63.4-1992



Front view



Side view

10.2 Radiated Emission Test

Test setup in accordance with ANSI C63.4-1992



Front view



Rear view

Note : Maintaining 10cm spacing between all the equipment cabinets.

SECTION 11. INSTRUMENTS USED FOR FINAL TEST

Instrument	Model No.	Serial No.	Manufacturer	Last cal. date	Period
Spectrum Analyzer	8564E	3643A00665	HEWLETT PACKARD	Mar. 23, 99	1 Year
Amplifier	8447D	1937A03130	HEWLETT PACKARD	Jul. 8, 99	1 Year
	83051A	3332A00329	HEWLETT PACKARD	Oct. 8, 99	1 Year
Test receiver	ESS	847151/012	ROHDE & SCHWARZ	Apr. 28, 99	1 Year
Broad Band antenna	LPB-2513/A	1072	A.R.A.	May 25, 99	1 Year
Double ridged antenna	3115	5044	EMCO	Mar. 25, 99	1 Year
LISN	ESH2-Z5	882395/022	ROHDE & SCHWARZ	Aug. 6, 99	1 Year
	ESH2-Z5	890484/002	ROHDE & SCHWARZ	May 17, 99	1 Year
Step Attenuator	8494B	2726A14513	HEWLETT PACKARD	Oct. 6, 99	1 Year
6dB Attenuator	CFA-01	None	TME	Oct. 6, 99	1 Year
	6806.17.B	None	SUHNER	Jan. 12, 99	1 Year
RF Switch	ACX-150	None	AKZO	Oct. 6, 99	1 Year
Coaxial cable	5D-2W (7.0m)	C1	AKZO	Oct. 6, 99	1 Year
Coaxial cable	5D-2W (2.0 m)	C2	AKZO	Oct. 6, 99	1 Year
Coaxial cable	5D-2W (9.0 m)	R1	AKZO	Oct. 6, 99	1 Year
Coaxial cable	10D-2W (5.5 m)	R2	AKZO	Oct. 6, 99	1 Year
Coaxial cable	5D-2W (2.0 m)	R3	AKZO	Oct. 6, 99	1 Year
Coaxial cable	5D-2W (0.2 m)	R4	AKZO	Oct. 6, 99	1 Year
Coaxial cable	5D-2W (1.0 m)	R5	AKZO	Oct. 6, 99	1 Year
Coaxial cable	5D-2W (1.0 m)	R6	AKZO	Oct. 6, 99	1 Year
Coaxial cable	5D-2W (1.0 m)	R7	AKZO	Oct. 6, 99	1 Year
Coaxial cable	SUCOFLEX 102 (1.0 m)	R14 13271/2	SUHNER	Jul. 1, 99	1 Year
Coaxial cable	SUCOFLEX 102 (6.0 m)	R15 13272/2	SUHNER	Jul. 1, 99	1 Year
Site Attenuation				Oct. 19, 98	1 Year

Note : Test instruments are calibrated according to Quality Manual and Calibration Rules of EMC division.

SECTION 12. UNCERTAINTY OF MEASUREMENT

Uncertainty of measurement

The uncertainty of the measurements performed for this report lies:

Radiated emission at 3m

30 MHz – 1000 MHz +/- 3.6 dB

Above 1 GHz +/- 3.9 dB

Conducted emission

9 kHz – 30 MHz +/- 1.8 dB

These figures indicate the uncertainty of the measurements when the same staff performs the test with the same testing equipment and facility.

The uncertainty of the measurements when a different staff with different equipment and facility are under study.

Please note that these uncertainty are not reflected to the compliance judgement of the test results in this report.

SECTION 13. VALIDITY OF TEST REPORT

- 13.1 The test result of this report is effective for equipment under test itself and under the test configuration described on the report.
- 13.2 This test report does not assure that whether the test result taken in other testing laboratory is compatible or reproducible to the test result on this report or not.
- 13.3 Copying of this report without permission is prohibited.

SECTION 14. DESCRIPTION OF TEST LABORATORY

14.1 Outline of Akzo Kashima Limited, EMC Division

Akzo Kashima Ltd. was established in 1975 for manufacturing specialty chemicals. The shares are owned by Akzo Nobel KK (70%), the country organization in Japan for Akzo Novel nv., and TOSOH Corporation (30%), one of the leading petrochemical manufacturers in Japan. Akzo Nobel, headquartered in the Netherlands, is one of the world's leading companies in selected areas of chemicals, coatings, healthcare products and fibers with work force of approximately 70,000 people in over 50 countries.

In 1984, in order to respond to the growing testing demand, in particular, for FCC filing, Akzo Kashima started EMI testing business, installing the first open air test site in Kashima, Ibaraki prefecture. Further the business has been expanded by installing additional testing facilities not only in Kashima but also in other areas such as Shizuoka, Nagano, Kanagawa and Tochigi. As results, Akzo Kashima has now 16 open air test sites and 4 anechoic chambers for EMI/EMC testing. As the largest EMC testing laboratory in number of testing facilities and staffs, EMC Division has been organized separately in the company and independently operated in conformity with the requirements of ISO Guide 25 (EN 45000) for its competency as a testing laboratory.

Akzo Kashima EMC Division is the first foreign private laboratory accredited by NVLAP, National Voluntary Laboratory Accreditation Program-NIST, USA. The division has been certified, authorized and/or filed as a competent testing laboratory by various testing organizations/authorities as described below.

14.2 Filing, certification, authorization and accreditation list

EMI/EMC testing

FCC	(USA)
NVLAP	(USA)
NEMKO	(Norway)
VCCI	(Japan)
NMi	(The Netherlands)
TÜV PRODUCT SERVICE	(Germany)

Telecommunications terminal testing

FCC	(USA)
NVLAP	(USA)
NATA	(Australia)
IC	(Canada)

Note : NVLAP accreditation does not constitute any product endorsement by NVLAP or any agent of the U.S. Government.