

Test Laboratory: UL CCS SAR Lab B

Face Up

Communication System: WLAN_5GHz; Frequency: 5200 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5200$ MHz; $\sigma = 5.267$ mho/m; $\epsilon_r = 51.18$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(4.1, 4.1, 4.1); Calibrated: 03/05/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 02/05/2011
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1120
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

802.11a/Ch 40_Ant1/Area Scan (13x20x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 0.320 mW/g


802.11a/Ch 40_Ant1/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 8.413 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.559 W/kg

SAR(1 g) = 0.183 mW/g; SAR(10 g) = 0.062 mW/g

Maximum value of SAR (measured) = 0.325 mW/g

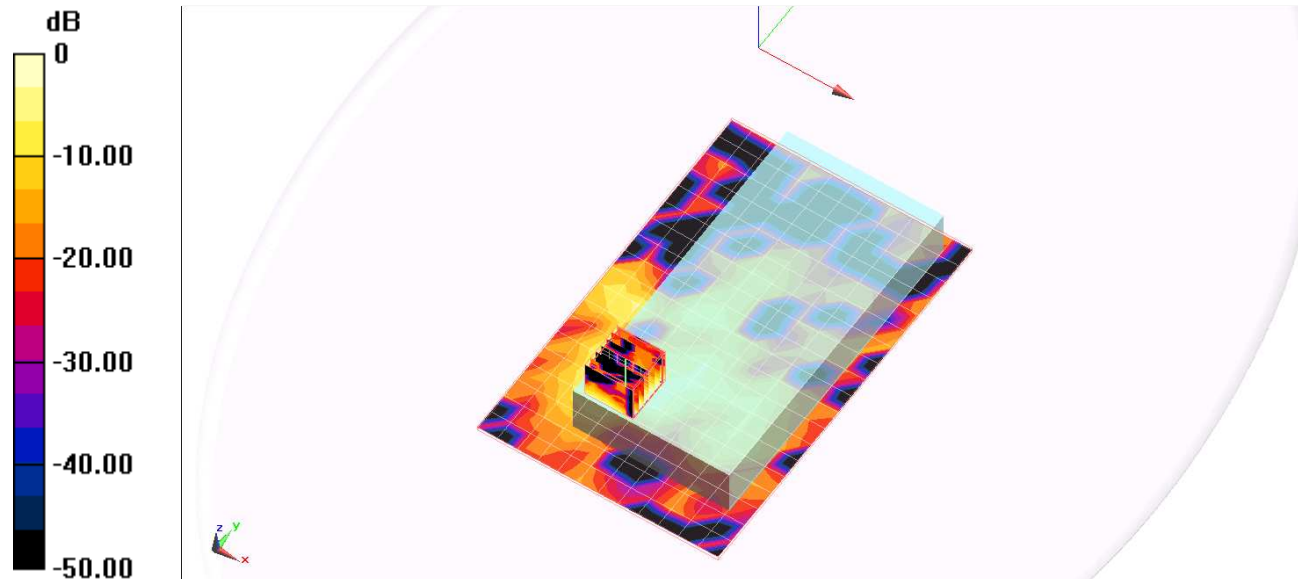

0 dB = 0.320mW/g


Test Laboratory: UL CCS SAR Lab B

Face Up

DUT: Casio Handheld; Type: N/A; Serial: N/A

Communication System: WLAN_5GHz; Frequency: 5200 MHz;Duty Cycle: 1:1

802.11a /Ch 40_Ant1/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 0.348 mW/g

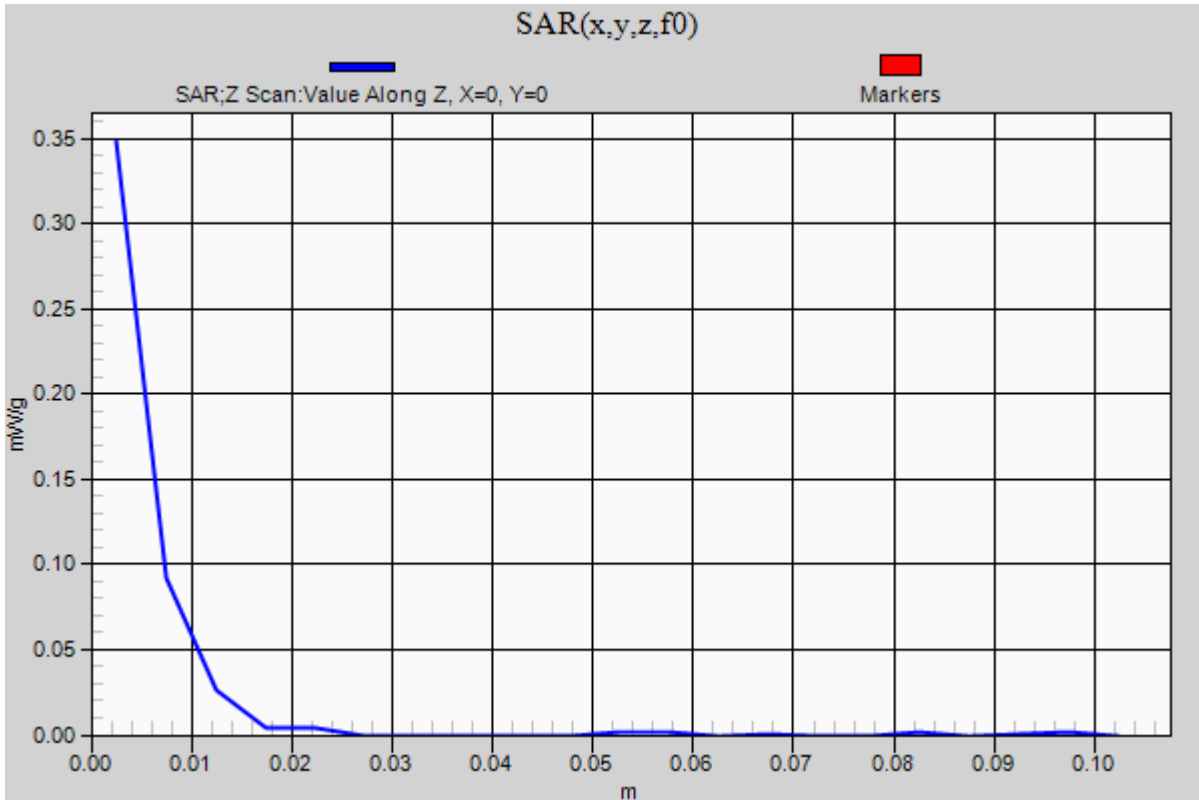

Test Laboratory: UL CCS SAR Lab B

Face Up

Communication System: WLAN_5GHz; Frequency: 5200 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5200$ MHz; $\sigma = 5.267$ mho/m; $\epsilon_r = 51.18$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(4.1, 4.1, 4.1); Calibrated: 03/05/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 02/05/2011
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1120
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

802.11a /Ch 40_Ant2/Area Scan (13x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.012 mW/g


802.11a /Ch 40_Ant2/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.190 V/m; Power Drift = -009.0 dB

Peak SAR (extrapolated) = 0.007 W/kg

SAR(1 g) = 0.001 mW/g; SAR(10 g) = 0.001 mW/g

Maximum value of SAR (measured) = 0.015 mW/g

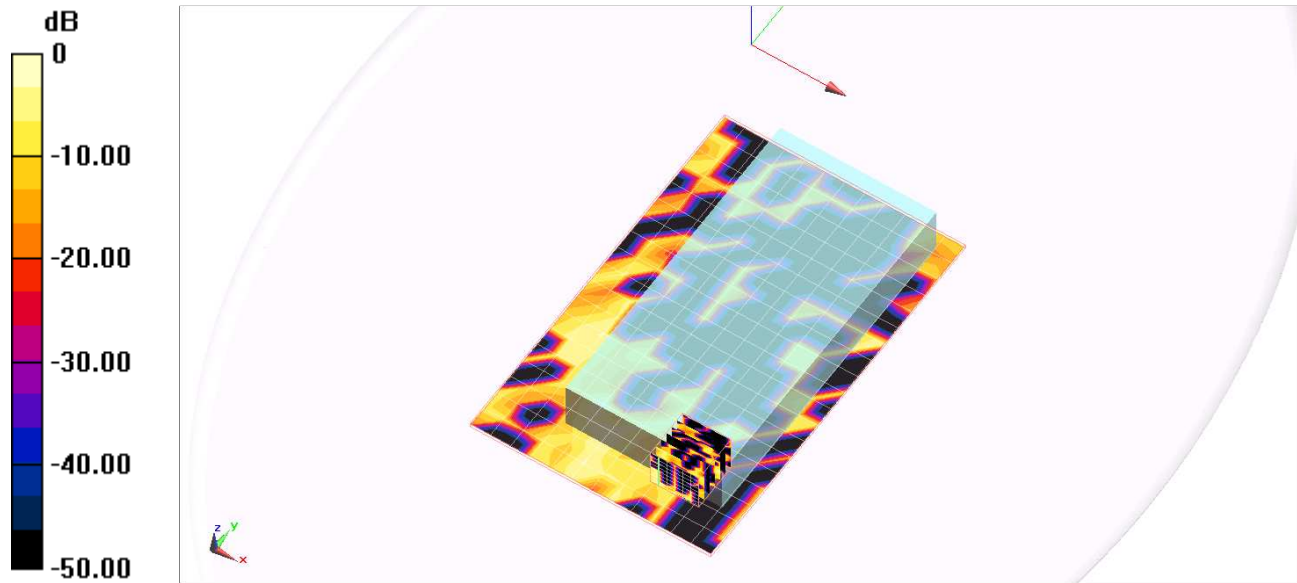

0 dB = 0.020mW/g

Test Laboratory: UL CCS SAR Lab B

Face Up

Communication System: WLAN_5GHz; Frequency: 5280 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5280$ MHz; $\sigma = 5.388$ mho/m; $\epsilon_r = 51.03$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(3.88, 3.88, 3.88); Calibrated: 03/05/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 02/05/2011
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1120
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

802.11a/Ch 56_Ant1/Area Scan (13x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.029 mW/g


802.11a/Ch 56_Ant1/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.188 V/m; Power Drift = -0.042 dB

Peak SAR (extrapolated) = 0.212 W/kg

SAR(1 g) = 0.015 mW/g; SAR(10 g) = 0.0019 mW/g

Maximum value of SAR (measured) = 0.034 mW/g

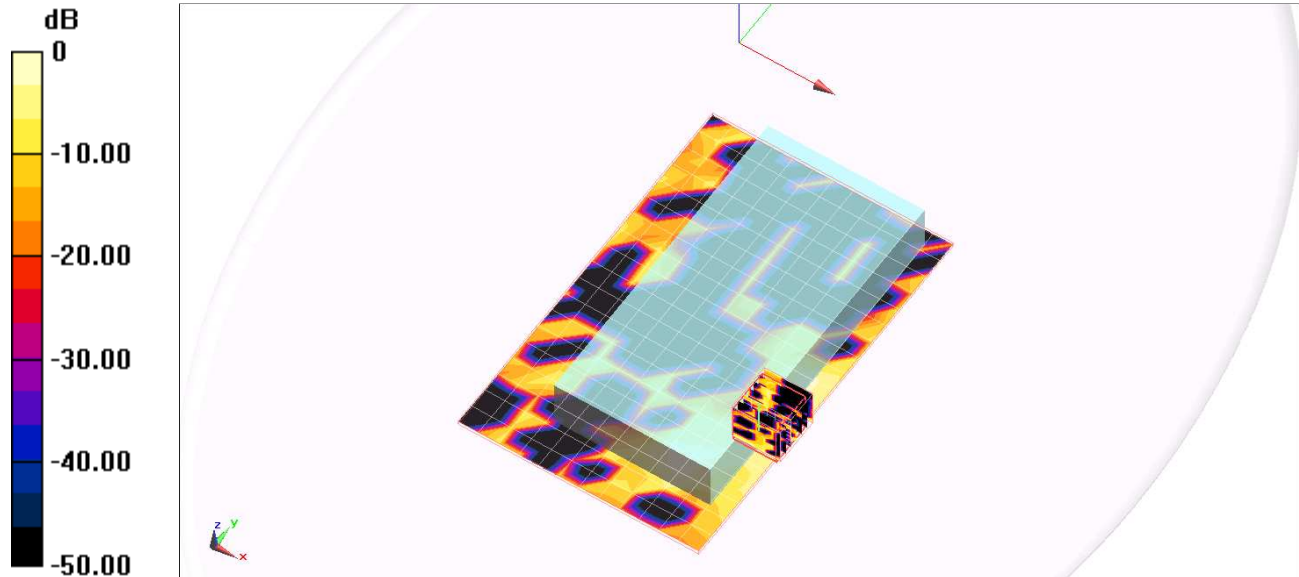

0 dB = 0.030mW/g


Test Laboratory: UL CCS SAR Lab B

Face Up

DUT: Casio Handheld; Type: N/A; Serial: N/A

Communication System: WLAN_5GHz; Frequency: 5280 MHz;Duty Cycle: 1:1

802.11a/Ch 56_Ant1/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 0.020 mW/g

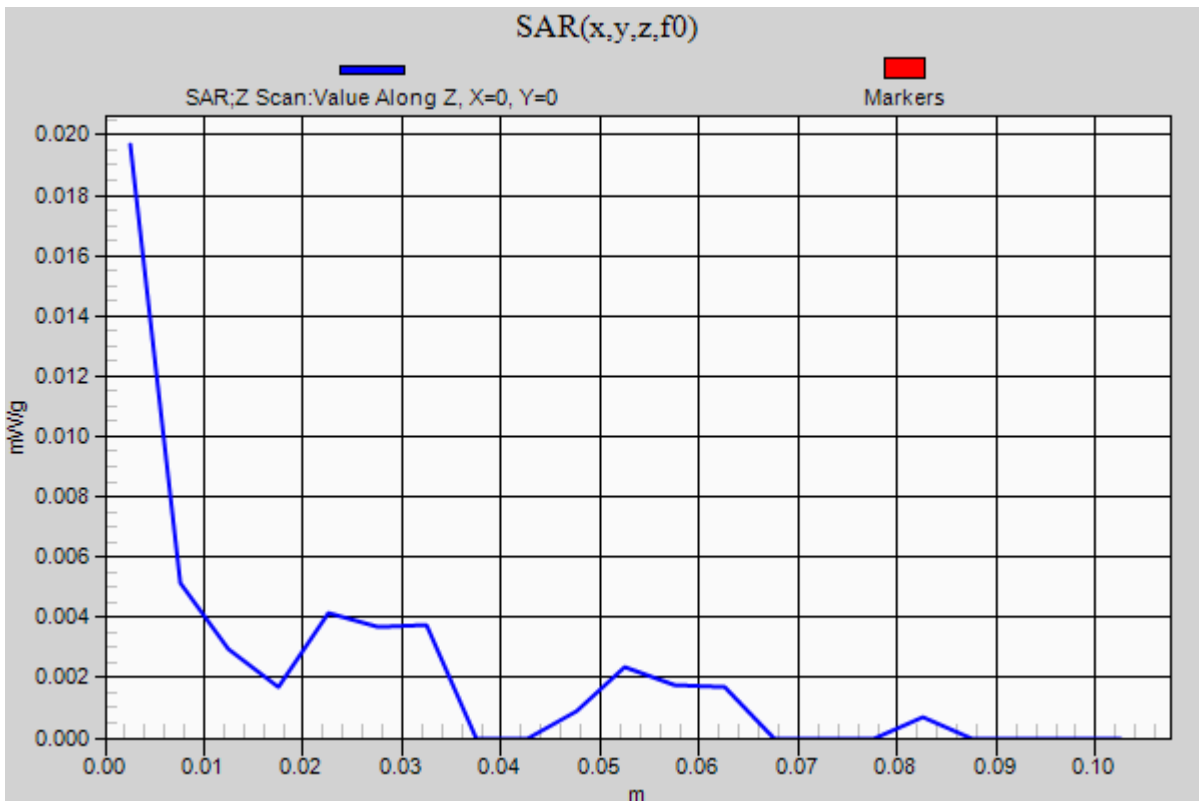

Test Laboratory: UL CCS SAR Lab B

Face Up

Communication System: WLAN_5GHz; Frequency: 5280 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5280$ MHz; $\sigma = 5.388$ mho/m; $\epsilon_r = 51.03$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(3.88, 3.88, 3.88); Calibrated: 03/05/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 02/05/2011
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1120
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

802.11a/Ch 56_Ant2/Area Scan (13x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.011 mW/g


802.11a/Ch 56_Ant2/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.192 V/m; Power Drift = 0.001 dB

Peak SAR (extrapolated) = 0.008 W/kg

SAR(1 g) = 0.001 mW/g; SAR(10 g) = 0.001 mW/g

Maximum value of SAR (measured) = 0.016 mW/g

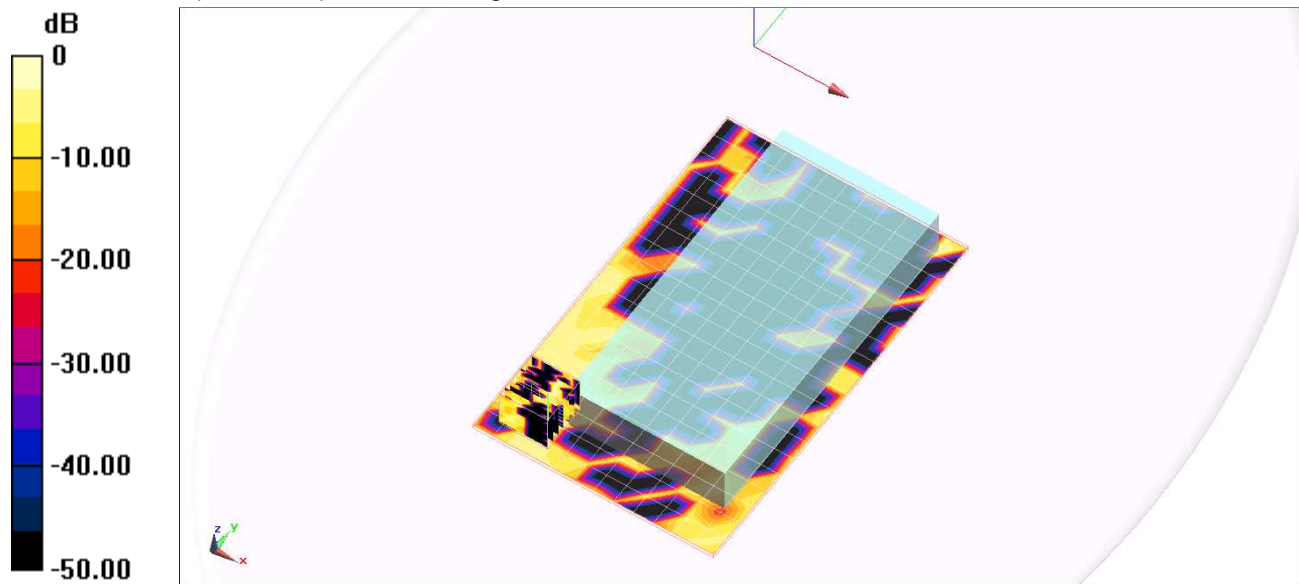

0 dB = 0.020mW/g

Test Laboratory: UL CCS SAR Lab B

Face Up

Communication System: WLAN_5GHz; Frequency: 5600 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5600$ MHz; $\sigma = 5.849$ mho/m; $\epsilon_r = 50.342$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(3.26, 3.26, 3.26); Calibrated: 03/05/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 02/05/2011
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1120
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

802.11a/Ch 120_Ant1/Area Scan (13x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.090 mW/g


802.11a/Ch 120_Ant1/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 4.204 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.444 W/kg

SAR(1 g) = 0.052 mW/g; SAR(10 g) = 0.018 mW/g

Maximum value of SAR (measured) = 0.091 mW/g

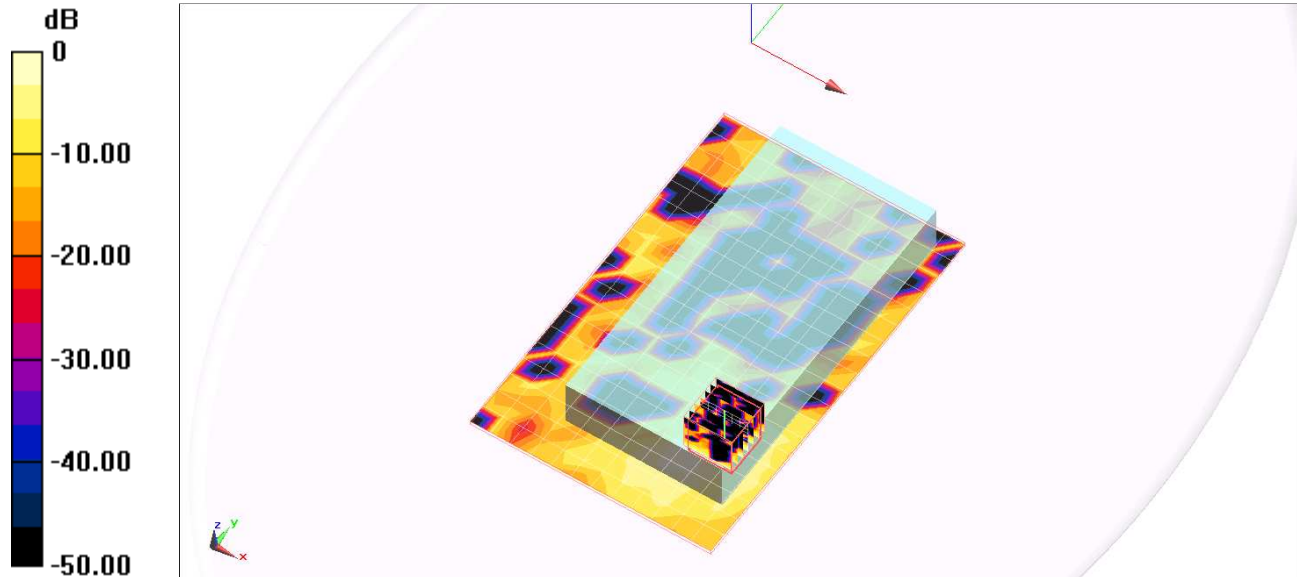

0 dB = 0.090mW/g


Test Laboratory: UL CCS SAR Lab B

Face Up

DUT: Casio Handheld; Type: N/A; Serial: N/A

Communication System: WLAN_5GHz; Frequency: 5600 MHz;Duty Cycle: 1:1

802.11a/Ch 120_Ant1/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 0.087 mW/g

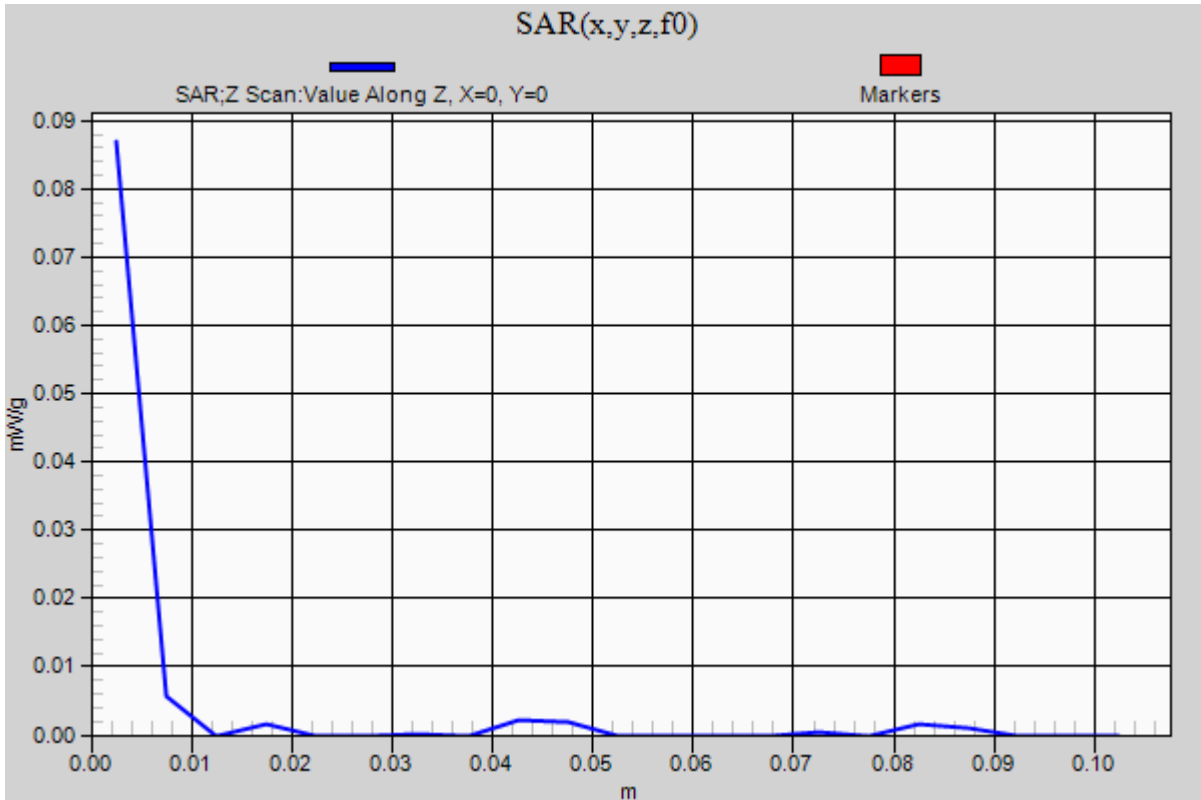

Test Laboratory: UL CCS SAR Lab B

Face Up

Communication System: WLAN_5GHz; Frequency: 5600 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5600$ MHz; $\sigma = 5.849$ mho/m; $\epsilon_r = 50.342$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(3.26, 3.26, 3.26); Calibrated: 03/05/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 02/05/2011
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1120
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

802.11a/Ch 120_Ant2/Area Scan (13x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.021 mW/g


802.11a/Ch 120_Ant2/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.624 V/m; Power Drift = -0.054 dB

Peak SAR (extrapolated) = 0.023 W/kg

SAR(1 g) = 0.000304 mW/g; SAR(10 g) = 2.06e-005 mW/g

Maximum value of SAR (measured) = 0.027 mW/g

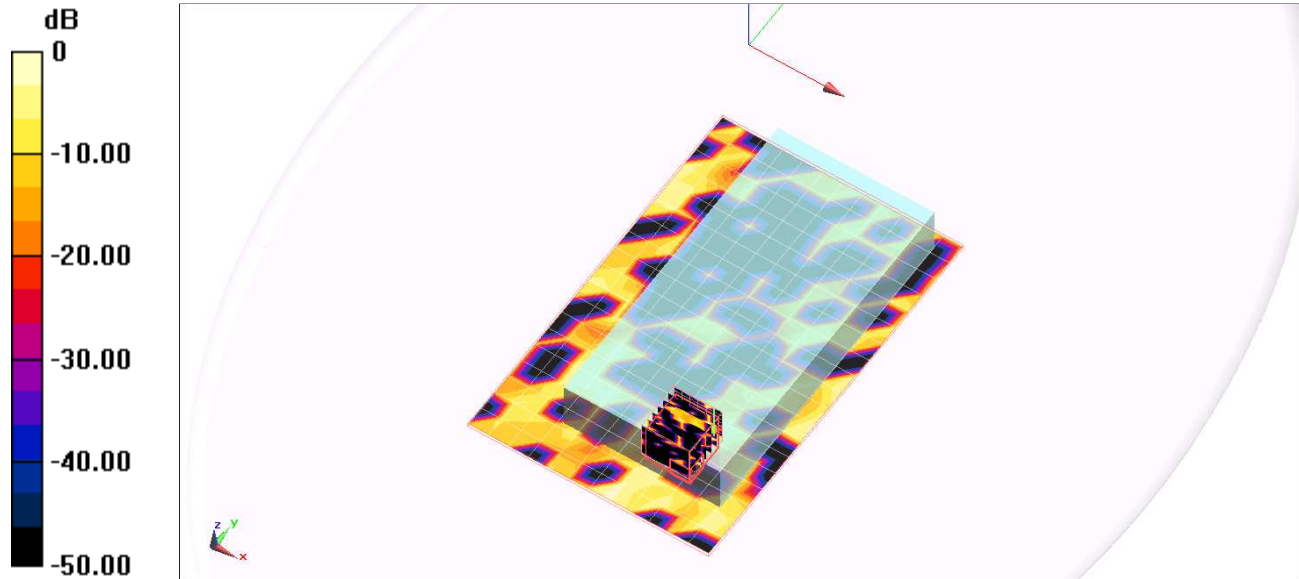

0 dB = 0.030mW/g

Test Laboratory: UL CCS SAR Lab B

Face Down

Communication System: 802.11a 5.2-802.11a; Frequency: 5200 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5200$ MHz; $\sigma = 5.267$ mho/m; $\epsilon_r = 51.18$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(4.1, 4.1, 4.1); Calibrated: 03/05/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 02/05/2011
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1120
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

802.11a/Ch 40_Ant 1/Area Scan (13x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.253 mW/g


802.11a/Ch 40_Ant 1/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 7.495 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.732 W/kg

SAR(1 g) = 0.156 mW/g; SAR(10 g) = 0.050 mW/g

Maximum value of SAR (measured) = 0.263 mW/g

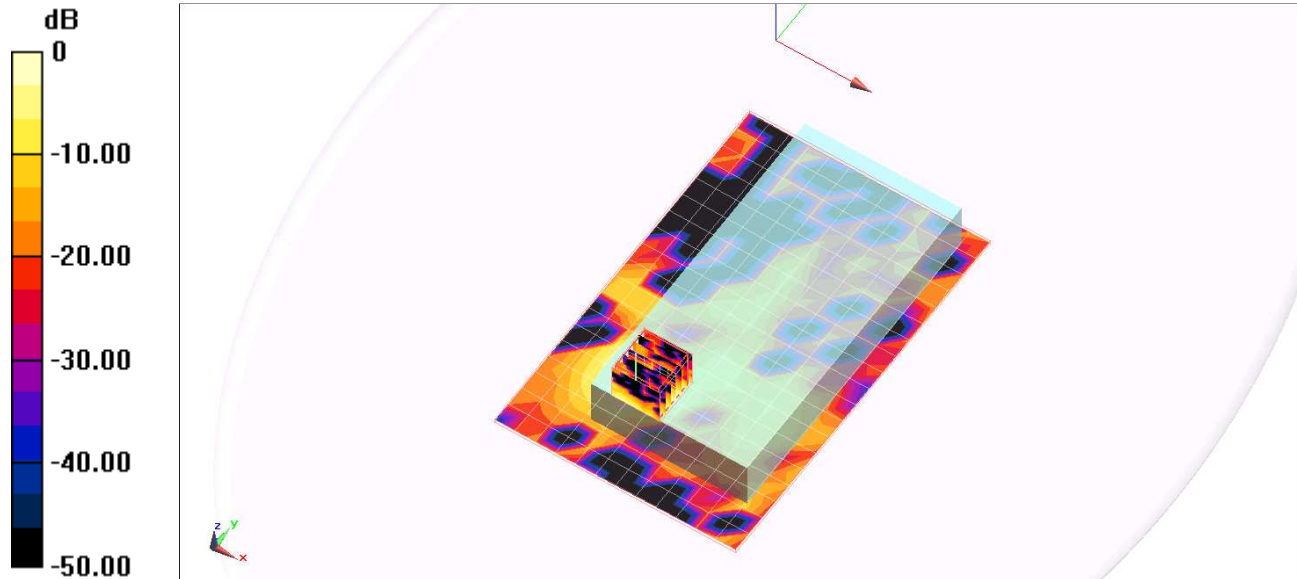

0 dB = 0.260mW/g

Test Laboratory: UL CCS SAR Lab B

Face Down

Communication System: 802.11a 5.2-802.11a; Frequency: 5200 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5200$ MHz; $\sigma = 5.267$ mho/m; $\epsilon_r = 51.18$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(4.1, 4.1, 4.1); Calibrated: 03/05/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 02/05/2011
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1120
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

802.11a/Ch 40_Ant 2/Area Scan (13x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.524 mW/g


802.11a/Ch 40_Ant 2/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 10.954 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.483 W/kg

SAR(1 g) = 0.378 mW/g; SAR(10 g) = 0.081 mW/g

Maximum value of SAR (measured) = 0.770 mW/g

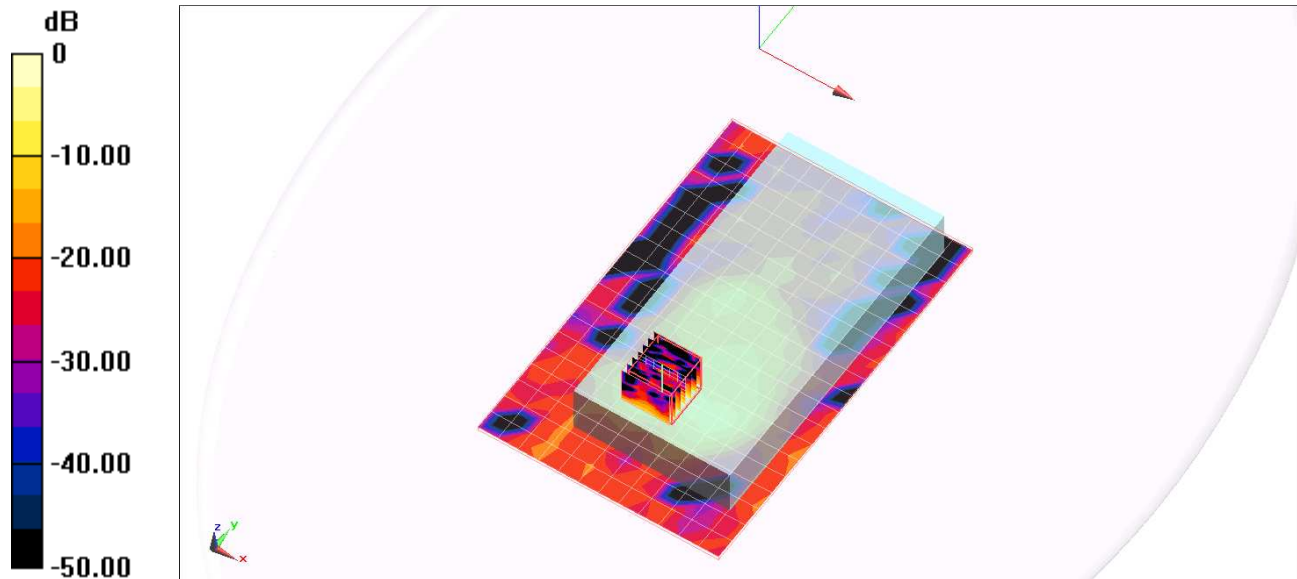

0 dB = 0.770mW/g

Test Laboratory: UL CCS SAR Lab B

Face Down

Communication System: WLAN_5GHz; Frequency: 5280 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5280$ MHz; $\sigma = 5.388$ mho/m; $\epsilon_r = 51.03$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(3.88, 3.88, 3.88); Calibrated: 03/05/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 02/05/2011
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1120
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

802.11a/Ant1_Ch56/Area Scan (13x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.181 mW/g


802.11a/Ant1_Ch56/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 6.142 V/m; Power Drift = 0.0067 dB

Peak SAR (extrapolated) = 0.383 W/kg

SAR(1 g) = 0.117 mW/g; SAR(10 g) = 0.036 mW/g

Maximum value of SAR (measured) = 0.210 mW/g

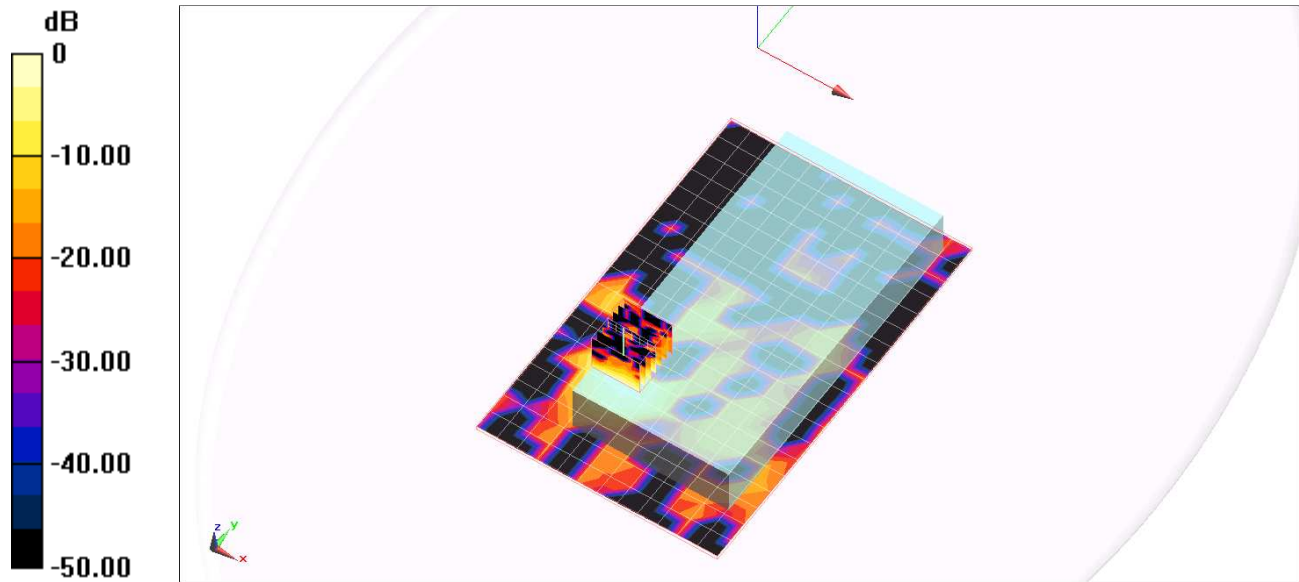

0 dB = 0.210mW/g

Test Laboratory: UL CCS SAR Lab B

Face Down

Communication System: WLAN_5GHz; Frequency: 5280 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5280$ MHz; $\sigma = 5.388$ mho/m; $\epsilon_r = 51.03$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(3.88, 3.88, 3.88); Calibrated: 03/05/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 02/05/2011
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1120
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

802.11a/Ant2_Ch56/Area Scan (13x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.675 mW/g


802.11a/Ant2_Ch56/Zoom Scan 2 (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 11.956 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 2.023 W/kg

SAR(1 g) = 0.513 mW/g; SAR(10 g) = 0.108 mW/g

Maximum value of SAR (measured) = 1.009 mW/g

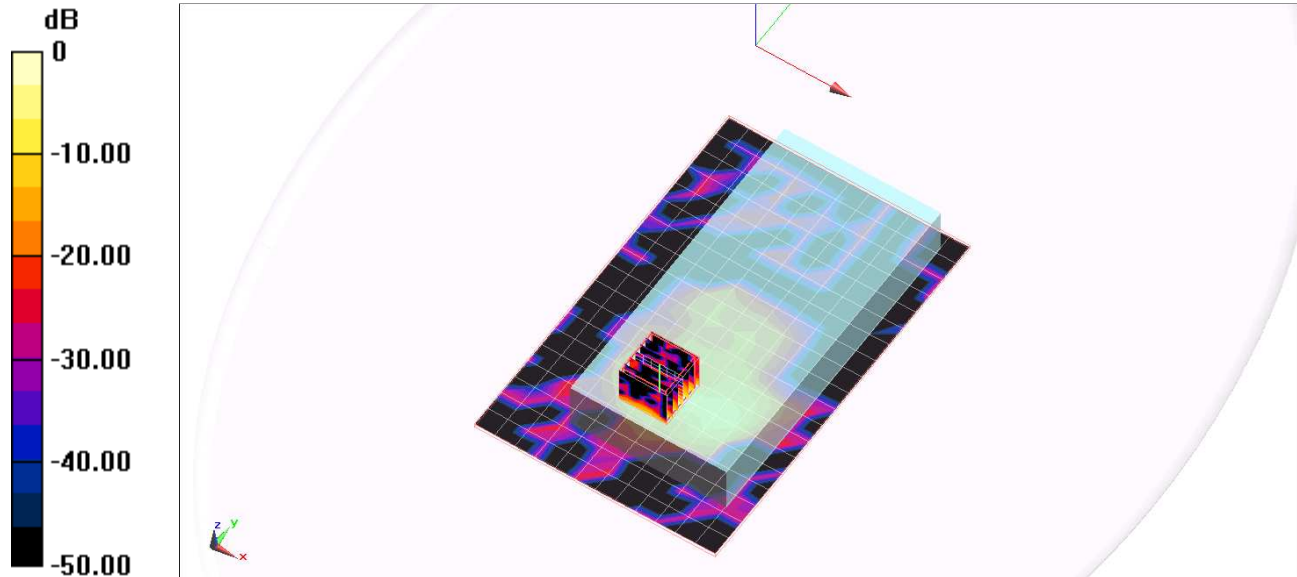

0 dB = 1.010mW/g


Test Laboratory: UL CCS SAR Lab B

Face Down

DUT: Casio Handheld; Type: N/A; Serial: N/A

Communication System: WLAN_5GHz; Frequency: 5280 MHz; Duty Cycle: 1:1

Ant2_Ch56/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 0.971 mW/g

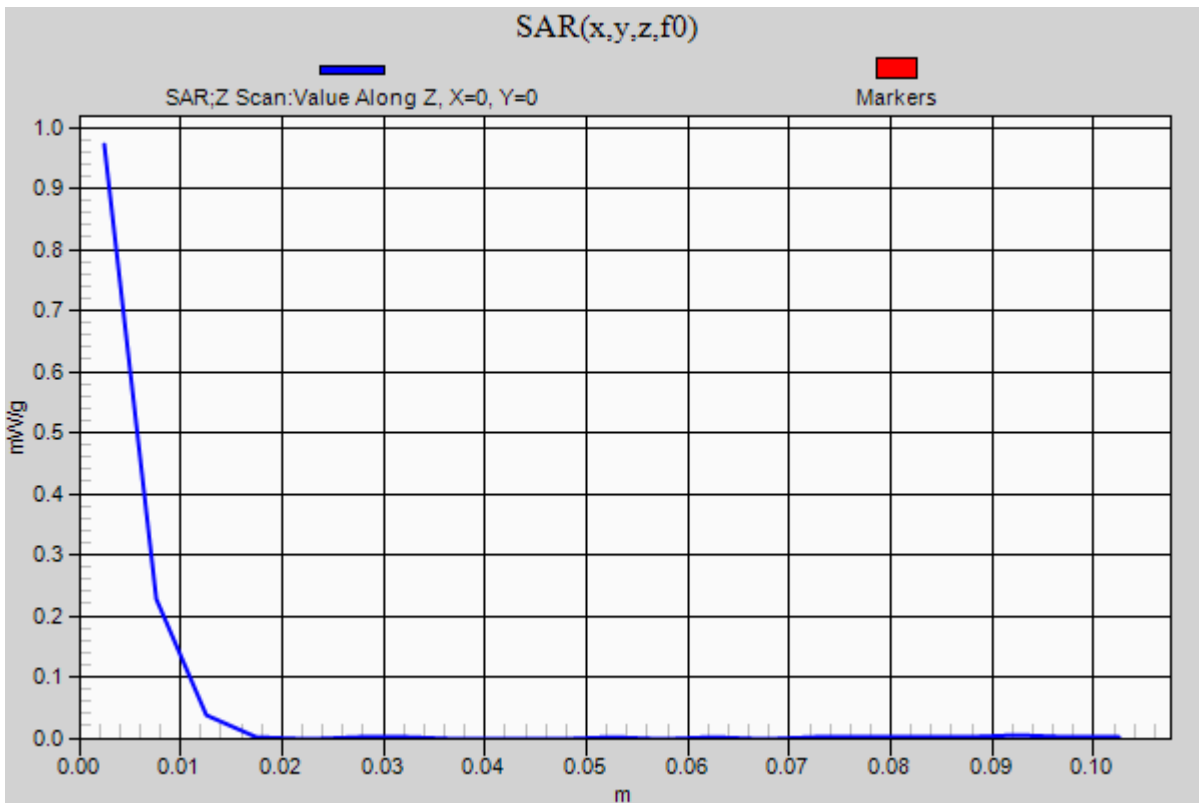

Test Laboratory: UL CCS SAR Lab B

Face Down

Communication System: WLAN_5GHz; Frequency: 5600 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5600$ MHz; $\sigma = 5.849$ mho/m; $\epsilon_r = 50.342$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(3.26, 3.26, 3.26); Calibrated: 03/05/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 02/05/2011
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1120
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

802.11a/Ch 120_Ant 1/Area Scan (13x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.212 mW/g


802.11a/Ch 120_Ant 1/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 6.660 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.439 W/kg

SAR(1 g) = 0.123 mW/g; SAR(10 g) = 0.048 mW/g

Maximum value of SAR (measured) = 0.227 mW/g

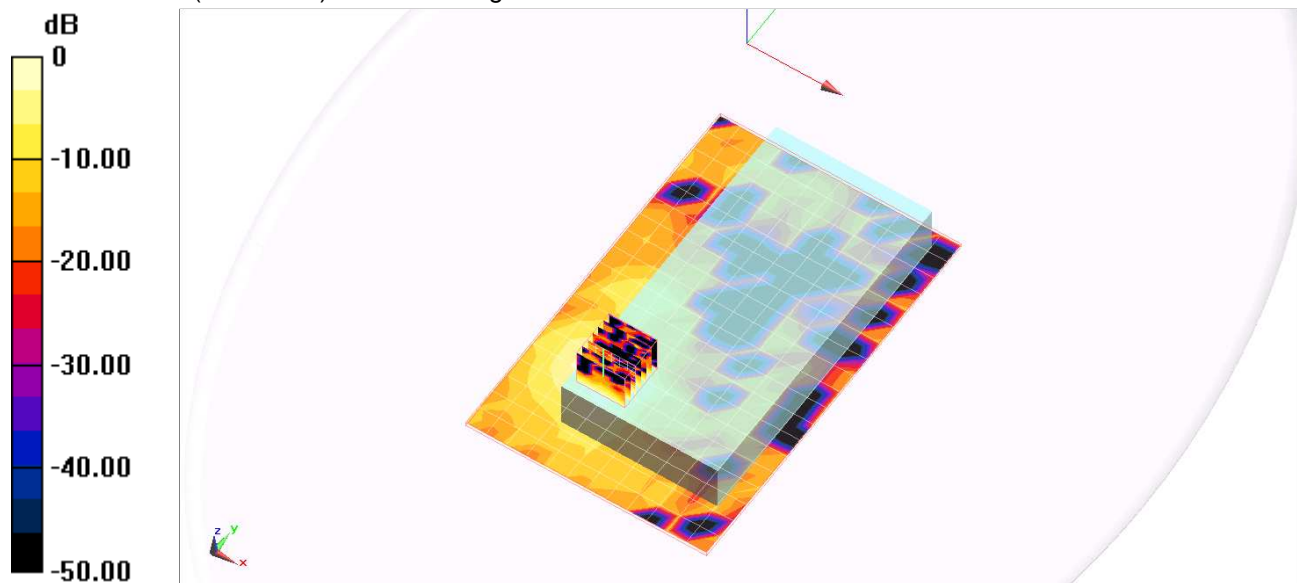


Test Laboratory: UL CCS SAR Lab B

Face Down

DUT: Casio Handheld; Type: N/A; Serial: N/A

Communication System: WLAN_5GHz; Frequency: 5600 MHz;Duty Cycle: 1:1

802.11a/Ch 120_Ant 1/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 0.228 mW/g

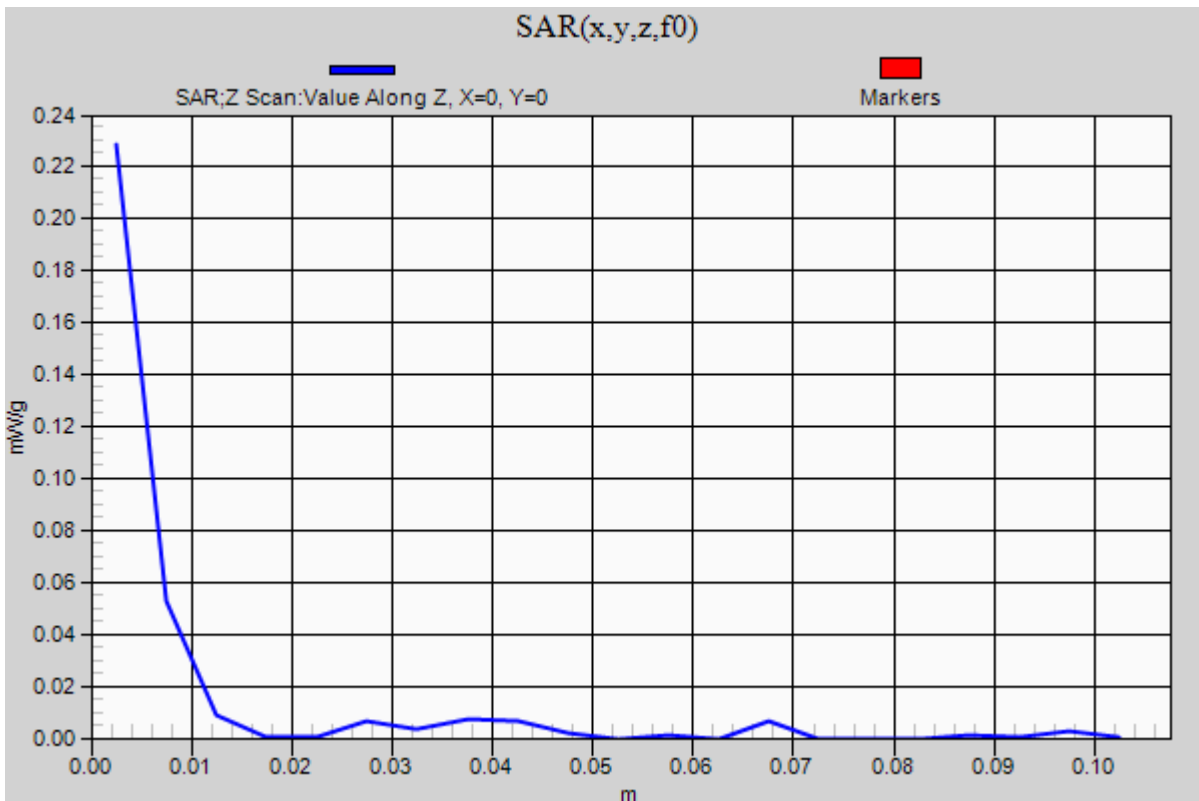

Test Laboratory: UL CCS SAR Lab B

Face Down

Communication System: WLAN_5GHz; Frequency: 5600 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5600$ MHz; $\sigma = 5.849$ mho/m; $\epsilon_r = 50.342$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(3.26, 3.26, 3.26); Calibrated: 03/05/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 02/05/2011
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1120
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

802.11a/Ch 120_Ant 2/Area Scan (13x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.281 mW/g


802.11a/Ch 120_Ant 2/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 7.488 V/m; Power Drift = 0.24 dB

Peak SAR (extrapolated) = 0.612 W/kg

SAR(1 g) = 0.165 mW/g; SAR(10 g) = 0.041 mW/g

Maximum value of SAR (measured) = 0.319 mW/g

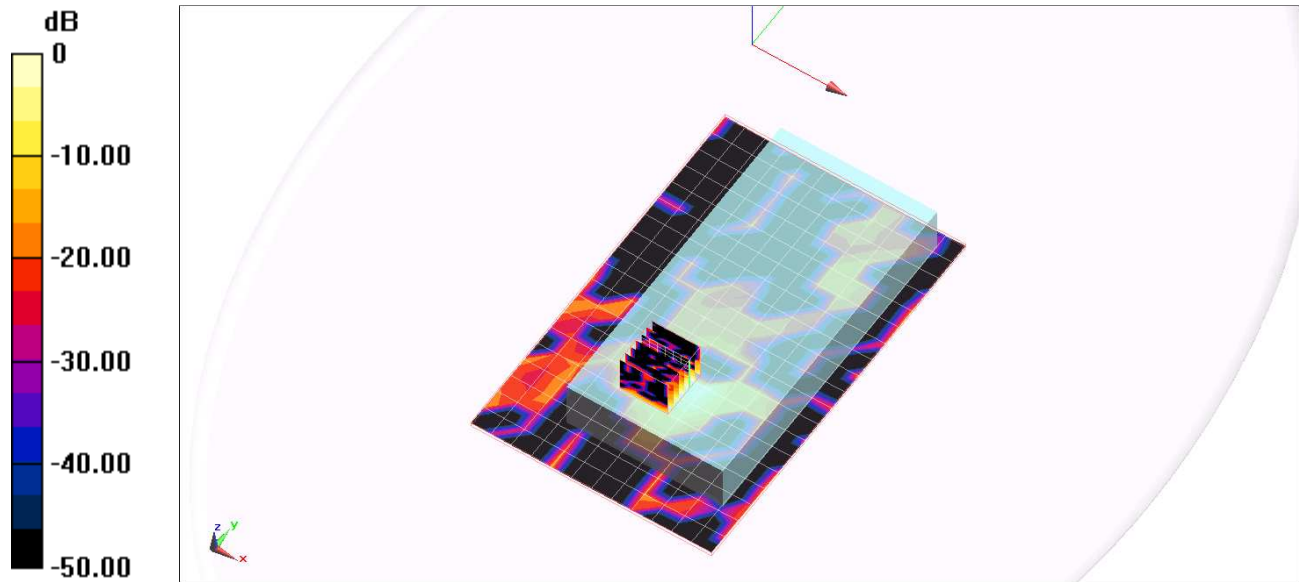

0 dB = 0.320mW/g

Test Laboratory: UL CCS SAR Lab B

Face Down

Communication System: WLAN_5GHz; Frequency: 5280 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5280$ MHz; $\sigma = 5.388$ mho/m; $\epsilon_r = 51.03$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3773; ConvF(3.88, 3.88, 3.88); Calibrated: 03/05/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 02/05/2011
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1120
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

802.11a/Ch 56_Ant 2_Ext-Batt/Area Scan (13x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.473 mW/g


802.11a/Ch 56_Ant 2_Ext-Batt/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 10.087 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.538 W/kg

SAR(1 g) = 0.361 mW/g; SAR(10 g) = 0.082 mW/g

Maximum value of SAR (measured) = 0.685 mW/g

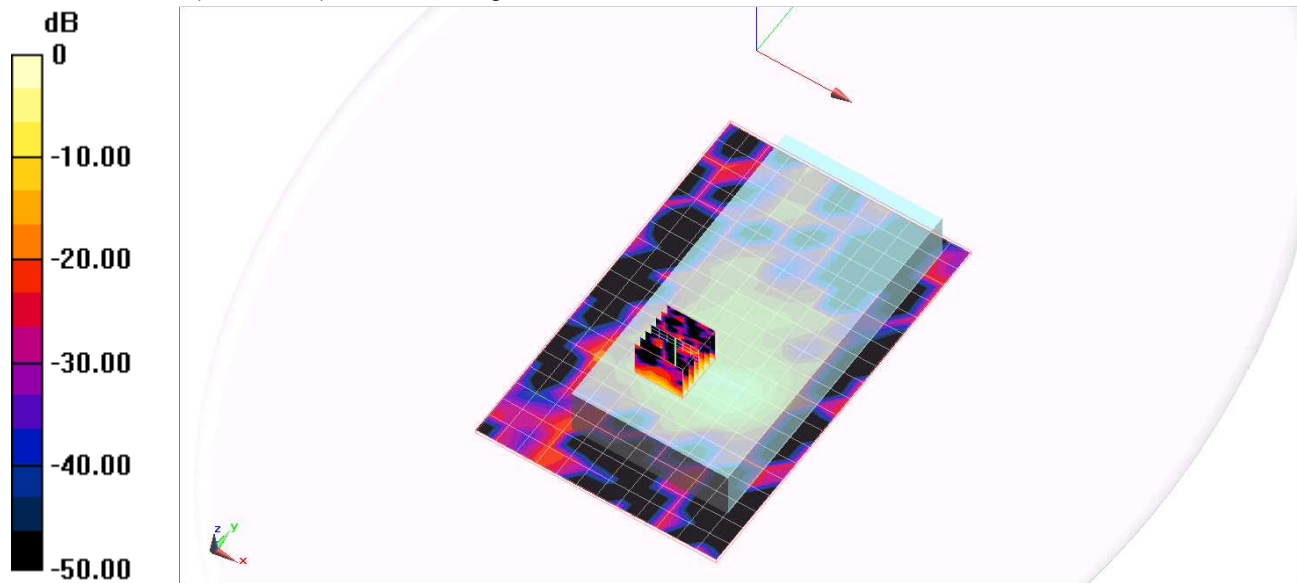

0 dB = 0.690mW/g