







RADIO TEST REPORT

Test Report No. 14039670S-A

| | |
|---------------------|--|
| Customer | CASIO COMPUTER CO., LTD. |
| Description of EUT | Watch |
| Model Number of EUT | DW-B5600 (Bluetooth Module: CW3509 is contained.) |
| FCC ID | BBQS35W |
| Test Regulation | FCC Part 15 Subpart C: 2021 |
| Test Result | Complied (Refer to SECTION 3) |
| Issue Date | March 10, 2022 |
| Remarks | - |

| | |
|--|--|
| Representative Test Engineer | Approved By |
|  |  |
| Kenichi Adachi Engineer | Akio Hayashi Manager |
|  | |
|  | |
| CERTIFICATE 1266.03 | |
| <input type="checkbox"/> The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan, Inc. | |
| <input checked="" type="checkbox"/> There is no testing item of "Non-accreditation". | |

ANNOUNCEMENT

- This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
- The results in this report apply only to the sample tested.
- This sample tested is in compliance with the limits of the above regulation.
- The test results in this test report are traceable to the national or international standards.
- This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
- This test report covers Radio technical requirements.
It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
- The all test items in this test report are conducted by UL Japan, Inc Shonan EMC Lab.
- The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan, Inc. has been accredited.
- The information provided from the applicant for this report is identified in Section 1.
- For test report(s) referred in this report, the latest version (including any revisions) is always referred.

REVISION HISTORY

Original Test Report No.: 14039670S-A

| Revision | Test Report No. | Date | Page Revised Contents |
|-----------------|-----------------|----------------|-----------------------|
| - (Original) | 14039670S-A | March 10, 2022 | - |

Reference: Abbreviations (Including words undescribed in this report)

| | | | |
|----------------|---|---------|---|
| A2LA | The American Association for Laboratory Accreditation | ICES | Interference-Causing Equipment Standard |
| AC | Alternating Current | IEC | International Electrotechnical Commission |
| AFH | Adaptive Frequency Hopping | IEEE | Institute of Electrical and Electronics Engineers |
| AM | Amplitude Modulation | IF | Intermediate Frequency |
| Amp, AMP | Amplifier | ILAC | International Laboratory Accreditation Conference |
| ANSI | American National Standards Institute | ISED | Innovation, Science and Economic Development Canada |
| Ant, ANT | Antenna | ISO | International Organization for Standardization |
| AP | Access Point | JAB | Japan Accreditation Board |
| ASK | Amplitude Shift Keying | LAN | Local Area Network |
| Atten., ATT | Attenuator | LIMS | Laboratory Information Management System |
| AV | Average | MCS | Modulation and Coding Scheme |
| BPSK | Binary Phase-Shift Keying | MRA | Mutual Recognition Arrangement |
| BR | Bluetooth Basic Rate | N/A | Not Applicable |
| BT | Bluetooth | NIST | National Institute of Standards and Technology |
| BT LE | Bluetooth Low Energy | NS | No signal detect. |
| BW | BandWidth | NSA | Normalized Site Attenuation |
| Cal Int | Calibration Interval | NVLAP | National Voluntary Laboratory Accreditation Program |
| CCK | Complementary Code Keying | OBW | Occupied Band Width |
| Ch., CH | Channel | OFDM | Orthogonal Frequency Division Multiplexing |
| CISPR | Comite International Special des Perturbations Radioelectriques | P/M | Power meter |
| CW | Continuous Wave | PCB | Printed Circuit Board |
| DBPSK | Differential BPSK | PER | Packet Error Rate |
| DC | Direct Current | PHY | Physical Layer |
| D-factor | Distance factor | PK | Peak |
| DFS | Dynamic Frequency Selection | PN | Pseudo random Noise |
| DQPSK | Differential QPSK | PRBS | Pseudo-Random Bit Sequence |
| DSSS | Direct Sequence Spread Spectrum | PSD | Power Spectral Density |
| EDR | Enhanced Data Rate | QAM | Quadrature Amplitude Modulation |
| EIRP, e.i.r.p. | Equivalent Isotropically Radiated Power | QP | Quasi-Peak |
| EMC | ElectroMagnetic Compatibility | QPSK | Quadri-Phase Shift Keying |
| EMI | ElectroMagnetic Interference | RBW | Resolution Band Width |
| EN | European Norm | RDS | Radio Data System |
| ERP, e.r.p. | Effective Radiated Power | RE | Radio Equipment |
| EU | European Union | RF | Radio Frequency |
| EUT | Equipment Under Test | RMS | Root Mean Square |
| Fac. | Factor | RSS | Radio Standards Specifications |
| FCC | Federal Communications Commission | Rx | Receiving |
| FHSS | Frequency Hopping Spread Spectrum | SA, S/A | Spectrum Analyzer |
| FM | Frequency Modulation | SG | Signal Generator |
| Freq. | Frequency | SVSWR | Site-Voltage Standing Wave Ratio |
| FSK | Frequency Shift Keying | TR | Test Receiver |
| GFSK | Gaussian Frequency-Shift Keying | Tx | Transmitting |
| GNSS | Global Navigation Satellite System | VBW | Video BandWidth |
| GPS | Global Positioning System | Vert. | Vertical |
| Hori. | Horizontal | WLAN | Wireless LAN |

| CONTENTS | PAGE |
|---|-------------|
| SECTION 1: Customer Information | 5 |
| SECTION 2: Equipment Under Test (EUT)..... | 5 |
| SECTION 3: Test Specification, Procedures & Results..... | 6 |
| SECTION 4: Operation of EUT during testing | 9 |
| SECTION 5: Radiated Spurious Emission | 11 |
| SECTION 6: Antenna Terminal Conducted Tests..... | 13 |
| APPENDIX 1: Test Data..... | 14 |
| 99 % Occupied Bandwidth and 6 dB Bandwidth..... | 14 |
| Maximum Peak Output Power | 16 |
| Average Output Power | 17 |
| Radiated Spurious Emission | 19 |
| Conducted Spurious Emission | 25 |
| Power Density | 28 |
| APPENDIX 2: Test Instruments..... | 30 |
| APPENDIX 3: Photographs of Test Setup | 32 |
| Radiated Spurious Emission | 32 |
| Pre-check of Worst Case Position..... | 33 |
| Antenna Terminal Conducted Tests..... | 34 |

SECTION 1: Customer Information

| | |
|------------------|---|
| Company Name | CASIO COMPUTER CO., LTD. |
| Address | 2-1, Sakaecho 3 chome, Hamura-shi, Tokyo 205-8555 Japan |
| Telephone Number | +81-42-579-7282 |
| Contact Person | Shuji Yamashita |

The information provided from the customer is as follows;

- Customer, Description of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
 - Operating/Test Mode(s) (Mode(s)) on all the relevant pages
 - SECTION 1: Customer Information
 - SECTION 2: Equipment Under Test (EUT) other than the Receipt Date and Test Date
 - SECTION 4: Operation of EUT during testing
- * The laboratory is exempted from liability of any test results affected from the above information in SECTION 2 and 4.

SECTION 2: Equipment Under Test (EUT)

2.1 Identification of EUT

| | |
|------------------|---|
| Description | Watch |
| Model Number | DW-B5600 |
| Alternative name | R041 |
| Serial Number | Refer to SECTION 4.2 |
| Condition | Production prototype (Not for Sale: This sample is equivalent to mass-produced items.) |
| Modification | No Modification by the test lab |
| Receipt Date | January 31, 2022 |
| Test Date | February 4 to 5, 2022 |

2.2 Product Description

General Specification

| | |
|-----------------------|---|
| Rating | DW-B5600 (Watch): Typical: DC 3.0 V, Min.: DC 1.9 V, Max.: DC 3.3 V CW3509 (Module): Typical: DC 3.0 V, Min.: DC 1.9 V, Max.: DC 3.3 V |
| Operating temperature | -10 deg. C to +60 deg. C |

Radio Specification

| | |
|------------------------|-------------------------------|
| Equipment Type | Transceiver |
| Frequency of Operation | 2402 MHz to 2480 MHz |
| Type of Modulation | GFSK |
| Antenna Type | Chip Antenna (Mono Pole), SMD |
| Antenna Gain | 2.5 dBi |

SECTION 3: Test Specification, Procedures & Results

3.1 Test Specification

| | |
|--------------------|--|
| Test Specification | FCC Part 15 Subpart C FCC Part 15 final revised on May 3, 2021 and effective July 2, 2021 |
| Title | FCC 47 CFR Part 15 Radio Frequency Device Subpart C Intentional Radiators Section 15.207 Conducted limits Section 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz |

* Also the EUT complies with FCC Part 15 Subpart B.

3.2 Procedures and Results

| Item | Test Procedure | Specification | Worst Margin | Results | Remarks |
|---|---|--|---|-------------------|---|
| Conducted Emission | FCC: ANSI C63.10-2013 6. Standard test methods ISED: RSS-Gen 8.8 | FCC: Section 15.207 ISED: RSS-Gen 8.8 | N/A | N/A | *1) |
| 6 dB Bandwidth | FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: RSS-Gen 6.7 | FCC: Section 15.247(a)(2) ISED: RSS-247 5.2(a) | See data. | Complied a) | Conducted |
| Maximum Peak Output Power | FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: RSS-Gen 6.12 | FCC: Section 15.247(b)(3) ISED: RSS-247 5.4(d) | | Complied b) | Conducted |
| Power Density | FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: - | FCC: Section 15.247(e) ISED: RSS-247 5.2(b) | | Complied c) | Conducted |
| Spurious Emission Restricted Band Edges | FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: RSS-Gen 6.13 | FCC: Section 15.247(d) ISED: RSS-247 5.5 RSS-Gen 8.9 RSS-Gen 8.10 | 5.6 dB 4804.000 MHz, AV, Hori. Tx BT LE, 2402 MHz | Complied d),e) | Conducted (below 30 MHz)/ Radiated (above 30 MHz) *2) |
| <p>Note: UL Japan, Inc.'s EMI Work Procedures: Work Instructions-ULID-003591 and Work Instructions-ULID-003593. * In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred. *1) The test is not applicable since the EUT does not have AC mains. *2) Radiated test was selected over 30 MHz based on section 15.247(d) and KDB 558074 D01 15.247 Meas Guidance v05r02 8.5 and 8.6.</p> | | | | | |
| <p>a) Refer to APPENDIX 1 (data of 99 % Occupied Bandwidth and 6 dB Bandwidth) b) Refer to APPENDIX 1 (data of Maximum Peak Output Power) c) Refer to APPENDIX 1 (data of Power Density) d) Refer to APPENDIX 1 (data of Conducted Spurious Emission) e) Refer to APPENDIX 1 (data of Radiated Spurious Emission)</p> | | | | | |
| <p>Symbols: Complied The data of this test item has enough margin, more than the measurement uncertainty. Complied# The data of this test item meets the limits unless the measurement uncertainty is taken into consideration</p> | | | | | |

FCC Part 15.31 (e)

The EUT provides stable voltage constantly to the RF part regardless of input voltage. Instead of a new battery, DC power supply was used for the test. That does not affect the test result, therefore the EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the requirement.

3.3 Addition to Standard

| Item | Test Procedure | Specification | Worst Margin | Results | Remarks |
|---|-------------------|---------------|--------------|---------|-----------|
| 99 % Occupied Bandwidth | ISED: RSS-Gen 6.7 | ISED: - | N/A | - a) | Conducted |
| a) Refer to APPENDIX 1 (data of 6 dB Bandwidth and 99 % Occupied Bandwidth) | | | | | |

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

There is no applicable rule of uncertainty in this applied standard. Therefore, the results are derived depending on whether or not laboratory uncertainty is applied.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k=2$.

Shonan EMC Lab.

| Item | Frequency range | Uncertainty (+/-) | | |
|--|-----------------|-------------------|----------------|----------------|
| | | No. 1 SAC / SR | No. 2 SAC / SR | No. 3 SAC / SR |
| Conducted emission (AC Mains) LISN | 150 kHz-30 MHz | 2.9 dB | 2.9 dB | 3.0 dB |
| Radiated emission (Measurement distance: 3 m) | 9 kHz-30 MHz | 3.2 dB | 3.1 dB | 3.1 dB |
| | 30 MHz-200 MHz | 4.6 dB | 4.6 dB | 4.6 dB |
| | 200 MHz-1 GHz | 6.0 dB | 6.1 dB | 6.1 dB |
| | 1 GHz-6 GHz | 4.7 dB | 4.7 dB | 4.7 dB |
| | 6 GHz-18 GHz | 5.2 dB | 5.3 dB | 5.3 dB |
| | 18 GHz-40 GHz | 5.4 dB | 5.5 dB | 5.5 dB |
| Radiated emission (Measurement distance: 1 m) | 1 GHz-18 GHz | 5.6 dB | 5.6 dB | 5.6 dB |
| | 18 GHz-40 GHz | 5.8 dB | 5.8 dB | 5.8 dB |

SAC=Semi-Anechoic Chamber

SR= Shielded Room is applied besides radiated emission

| Antenna terminal test | Uncertainty (+/-) |
|---|-------------------|
| Power Measurement above 1 GHz (Average Detector)_SPM-06 | 1.2 dB |
| Power Measurement above 1 GHz (Peak Detector)_SPM-06 | 2.0 dB |
| Power Measurement above 1 GHz (Average Detector)_SPM-07 | 1.2 dB |
| Power Measurement above 1 GHz (Peak Detector)_SPM-07 | 1.3 dB |
| Power Measurement above 1 GHz (Average Detector)_SPM-13 | 1.3 dB |
| Power Measurement above 1 GHz (Peak Detector)_SPM-13 | 1.3 dB |
| Spurious emission (Conducted) below 1GHz | 0.93 dB |
| Spurious emission (Conducted), Power Density measurement 1 GHz-3 GHz | 0.92 dB |
| Spurious emission (Conducted), Power Density measurement 3 GHz-18 GHz | 2.3 dB |
| Spurious emission (Conducted) 18 GHz-26.5 GHz | 2.3 dB |
| Spurious emission (Conducted) 26.5 GHz-40 GHz | 2.3 dB |
| Bandwidth Measurement | 0.012 % |
| Duty cycle and Time Measurement | 0.27 % |
| Temperature_SCH-01 | 0.93 deg.C. |
| Humidity_SCH-01 | 4.1 % |
| Temperature_SCH-02 | 2.0 deg.C. |
| Humidity_SCH-02 | 6.6 % |
| Voltage | 0.97 % |

3.5 Test Location

UL Japan, Inc. Shonan EMC Lab.

1-22-3, Megumigaoka, Hiratsuka-shi, Kanagawa-ken 259-1220 JAPAN

Telephone: +81 463 50 6400, Facsimile: +81 463 50 6401

A2LA Certificate Number: 1266.03

(FCC test firm registration number: 626366, ISED lab company number: 2973D / CAB identifier: JP0001)

| Test site | IC Registration Number | Width x Depth x Height (m) | Size of reference ground plane (m) / horizontal conducting plane | Maximum measurement distance |
|----------------------------|------------------------|----------------------------|--|------------------------------|
| No.1 Semi-anechoic chamber | 2973D-1 | 20.6 x 11.3 x 7.65 | 20.6 x 11.3 | 10 m |
| No.2 Semi-anechoic chamber | 2973D-2 | 20.6 x 11.3 x 7.65 | 20.6 x 11.3 | 10 m |
| No.3 Semi-anechoic chamber | 2973D-3 | 12.7 x 7.7 x 5.35 | 12.7 x 7.7 | 5 m |
| No.4 Semi-anechoic chamber | - | 8.1 x 5.1 x 3.55 | 8.1 x 5.1 | - |
| No.1 Shielded room | - | 6.8 x 4.1 x 2.7 | 6.8 x 4.1 | - |
| No.2 Shielded room | - | 6.8 x 4.1 x 2.7 | 6.8 x 4.1 | - |
| No.3 Shielded room | - | 6.3 x 4.7 x 2.7 | 6.3 x 4.7 | - |
| No.4 Shielded room | - | 4.4 x 4.7 x 2.7 | 4.4 x 4.7 | - |
| No.5 Shielded room | - | 7.8 x 6.4 x 2.7 | 7.8 x 6.4 | - |
| No.6 Shielded room | - | 7.8 x 6.4 x 2.7 | 7.8 x 6.4 | - |
| No.8 Shielded room | - | 3.45 x 5.5 x 2.4 | 3.45 x 5.5 | - |
| No.1 Measurement room | - | 2.55 x 4.1 x 2.5 | - | - |

3.6 Test Data, Test Instruments, and Test Set Up

Refer to APPENDIX.

SECTION 4: Operation of EUT during testing


4.1 Operating Mode(s)

| Mode | Remarks* |
|--|---|
| Bluetooth Low Energy (BT LE) | 1 M-PHY Uncoded PHY, Maximum Packet Size, PRBS9 |
| <p>*Power of the EUT was set by the software as follows; Power Setting: Fixed Software: BLE RF Test Version: 9.9 (Date: 2021.12 24, Storage location: EUT memory)</p> <p>*This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.</p> | |

*The Details of Operating Mode(s)

| Test Item | Operating Mode | Tested frequency |
|--|-----------------------|----------------------------------|
| Radiated Spurious Emission (Below 1 GHz) | Tx BT LE | 2480 MHz *1) |
| Radiated Spurious Emission (Above 1 GHz), Maximum Peak Output Power, Power Density, 6 dB Bandwidth, 99 % Occupied Bandwidth, Conducted Spurious Emission | Tx BT LE | 2402 MHz 2440 MHz 2480 MHz |
| <p>*1) Spurious emissions for frequencies below 1 GHz were limited to the channel that had the highest power during the antenna terminal test, as preliminary testing indicated that changing the operating frequency had no significant impact on the emissions in those frequency bands.</p> | | |

4.2 Configuration and Peripherals



* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support equipment

| No. | Item | Model number | Serial number | Manufacturer | Remarks |
|-----|-------------------|--------------|------------------|--------------|---------|
| A | Watch | DW-B5600 | 25 *1) 26 *2) | Casio | EUT |
| B | Power Supply (DC) | PAN35-10A | NA000955 | KIKUSUI | - |

*1) Used for Antenna Terminal conducted test

*2) Used for Radiated Emission test

List of cables used

| No. | Name | Length (m) | Shield | | Remarks |
|-----|--------|------------|------------|------------|-----------|
| | | | Cable | Connector | |
| 1 | DC | 0.1 | Unshielded | Unshielded | *3) |
| 2 | DC | 0.1 | Unshielded | Unshielded | *3) |
| 3 | Signal | 0.1 | Unshielded | Unshielded | *4) |
| 4 | DC | 2.0 | Unshielded | Unshielded | Extension |
| 5 | DC | 2.0 | Unshielded | Unshielded | Extension |
| 6 | AC | 2.0 | Unshielded | Unshielded | - |

*3) Cable for test operation

*4) Cable for system reset during the development, not used for the product

SECTION 5: Radiated Spurious Emission

Test Procedure

It was measured based on "8.5 and 8.6 of KDB 558074 D01 15.247 Meas Guidance v05r02".

[For below 1 GHz]

EUT was placed on a urethane platform of nominal size, 1.5 m by 1.0 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.

The height of the measuring antenna varied between 1 m and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

Test antenna was aimed at the EUT for receiving the maximum signal and always kept within the illumination area of the 3 dB beamwidth of the antenna.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

Test Antennas are used as below;

| | | | |
|--------------|-------------------|------------------|-------------|
| Frequency | 30 MHz to 200 MHz | 200 MHz to 1 GHz | Above 1 GHz |
| Antenna Type | Biconical | Logperiodic | Horn |

In any 100 kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.


20 dBc was applied to the frequency over the limit of FCC 15.209 / Table 4 of RSS-Gen 8.9(ISED) and outside the restricted band of FCC15.205 / Table 6 of RSS-Gen 8.10 (ISED).

| | | | | |
|-----------------|---------------|--------------------------|--|------------------------------|
| Frequency | Below 1 GHz | Above 1 GHz | | 20 dBc |
| Instrument Used | Test Receiver | Spectrum Analyzer | | Spectrum Analyzer |
| Detector | QP | PK | AV *1) | PK |
| IF Bandwidth | BW 120 kHz | RBW: 1 MHz VBW: 3 MHz | 11,12,2.5.2 RBW: 1 MHz VBW: 3 MHz Detector: Power Averaging (Linear voltage) Trace: 100 traces Duty factor was added to the results. | RBW: 100 kHz VBW: 300 kHz |

*1) Average Power Measurement was performed based on ANSI C63.10-2013.


Figure 2: Test Setup

Below 1 GHz

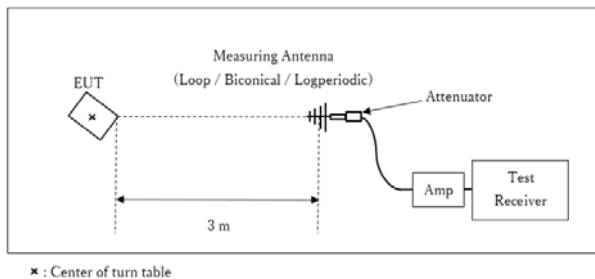

Test Distance: 3 m

1 GHz to 10 GHz

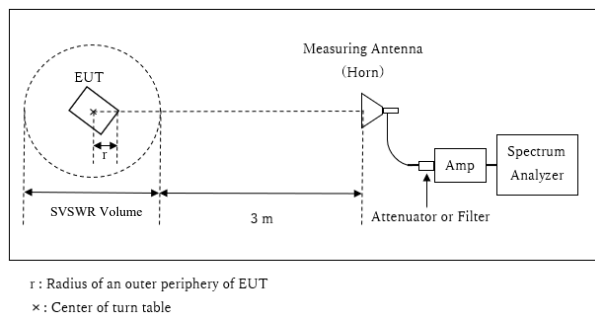


Distance Factor: $20 \times \log (3.97 \text{ m} / 3.0 \text{ m}) = 2.44 \text{ dB}$
* Test Distance: $(3 + \text{SVSWR Volume} / 2) - r = 3.97 \text{ m}$

SVSWR Volume : 2.0 m
(SVSWR Volume has been calibrated based on CISPR 16-1-4.)
 $r = 0.03 \text{ m}$

* The test was performed with $r = 0.0 \text{ m}$ since EUT is small and it was the rather conservative condition.

10 GHz to 26.5 GHz

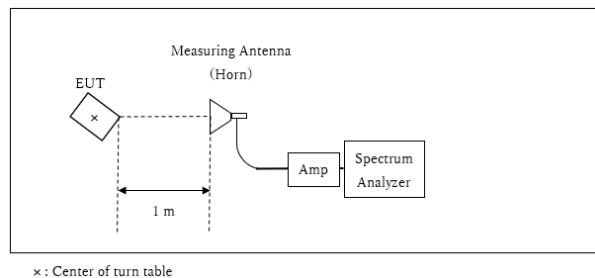

Distance Factor: $20 \times \log (1.0 \text{ m} / 3.0 \text{ m}) = -9.54 \text{ dB}$
*Test Distance: 1 m

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

| Antenna polarization | Carrier | Spurious (30 MHz - 1 GHz) | Spurious (1 GHz - 2.8 GHz) | Spurious (2.8 GHz - 10 GHz) | Spurious (10 GHz - 18 GHz) | Spurious (18 GHz - 26.5 GHz) |
|----------------------|---------|---------------------------|----------------------------|-----------------------------|----------------------------|------------------------------|
| Horizontal | X | Y | X | Y | Y | X |
| Vertical | Z | X | Z | Z | X | X |

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Measurement Range : 30 MHz to 26.5 GHz
Test Data : APPENDIX
Test Result : Pass

SECTION 6: Antenna Terminal Conducted Tests

Test Procedure

The tests were made with below setting connected to the antenna port.

| Test | Span | RBW | VBW | Sweep time | Detector | Trace | Instrument Used |
|-------------------------------------|---|-----------------|--------------------|------------|------------------|----------|----------------------------------|
| 6 dB Bandwidth | 10 MHz | 100 kHz | 300 kHz | Auto | Peak | Max Hold | Spectrum Analyzer |
| 99 % Occupied Bandwidth *1) | Enough width to display emission skirts | 1 to 5 % of OBW | Three times of RBW | Auto | Peak | Max Hold | Spectrum Analyzer |
| Maximum Peak Output Power | - | - | - | Auto | Peak/Average *2) | - | Power Meter (Sensor: 160 MHz BW) |
| Peak Power Density | 1.5 times the 6 dB Bandwidth | 3 kHz | 9.1 kHz | Auto | Peak | Max Hold | Spectrum Analyzer *3) |
| Conducted Spurious Emission *4) *5) | 9 kHz to 150 kHz | 200 Hz | 620 Hz | Auto | Peak | Max Hold | Spectrum Analyzer |
| | 150 kHz to 30 MHz | 10 kHz | 30 kHz | | | | |

*1) Peak hold was applied as Worst-case measurement.

*2) Reference data

*3) Section 11.10.2 Method PKPSD (peak PSD) of "ANSI C63.10-2013".

*4) In the frequency range below 30 MHz, RBW was narrowed to separate the noise contents.

Then, wide-band noise near the limit was checked separately, however the noise was low enough as shown in the chart.

(9 kHz - 150 kHz: RBW = 200 Hz, 150 kHz - 30 MHz: RBW = 10 kHz).

*5) The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377 Ohms. For example, the measurement at frequency 9 kHz resulted in a level of 45.5 dBuV/m, which is equivalent to $45.5 - 51.5 = -6.0$ dBuA/m, which has the same margin, 3 dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

The test results and limit are rounded off to two decimals place, so some differences might be observed.
The equipment and cables were not used for factor 0 dB of the data sheets.

Test Data : **APPENDIX**

Test Result : **Pass**


APPENDIX 1: Test Data

99 % Occupied Bandwidth and 6 dB Bandwidth

Report No. 14039670S-A
Test place Shonan EMC Lab. No.1 Shielded Room
Date February 4, 2022
Temperature / Humidity 25 deg. C / 25 % RH
Engineer Takahiro Kawakami
Mode Tx BT LE

| Frequency [MHz] | 99 % Occupied Bandwidth [kHz] | 6 dB Bandwidth [MHz] | Limit for 6 dB Bandwidth [MHz] |
|--------------------|-------------------------------------|-------------------------|--------------------------------------|
| 2402 | 1053.4 | 0.714 | > 0.5000 |
| 2440 | 1047.8 | 0.718 | > 0.5000 |
| 2480 | 1044.7 | 0.698 | > 0.5000 |

99 % Occupied Bandwidth and 6 dB Bandwidth

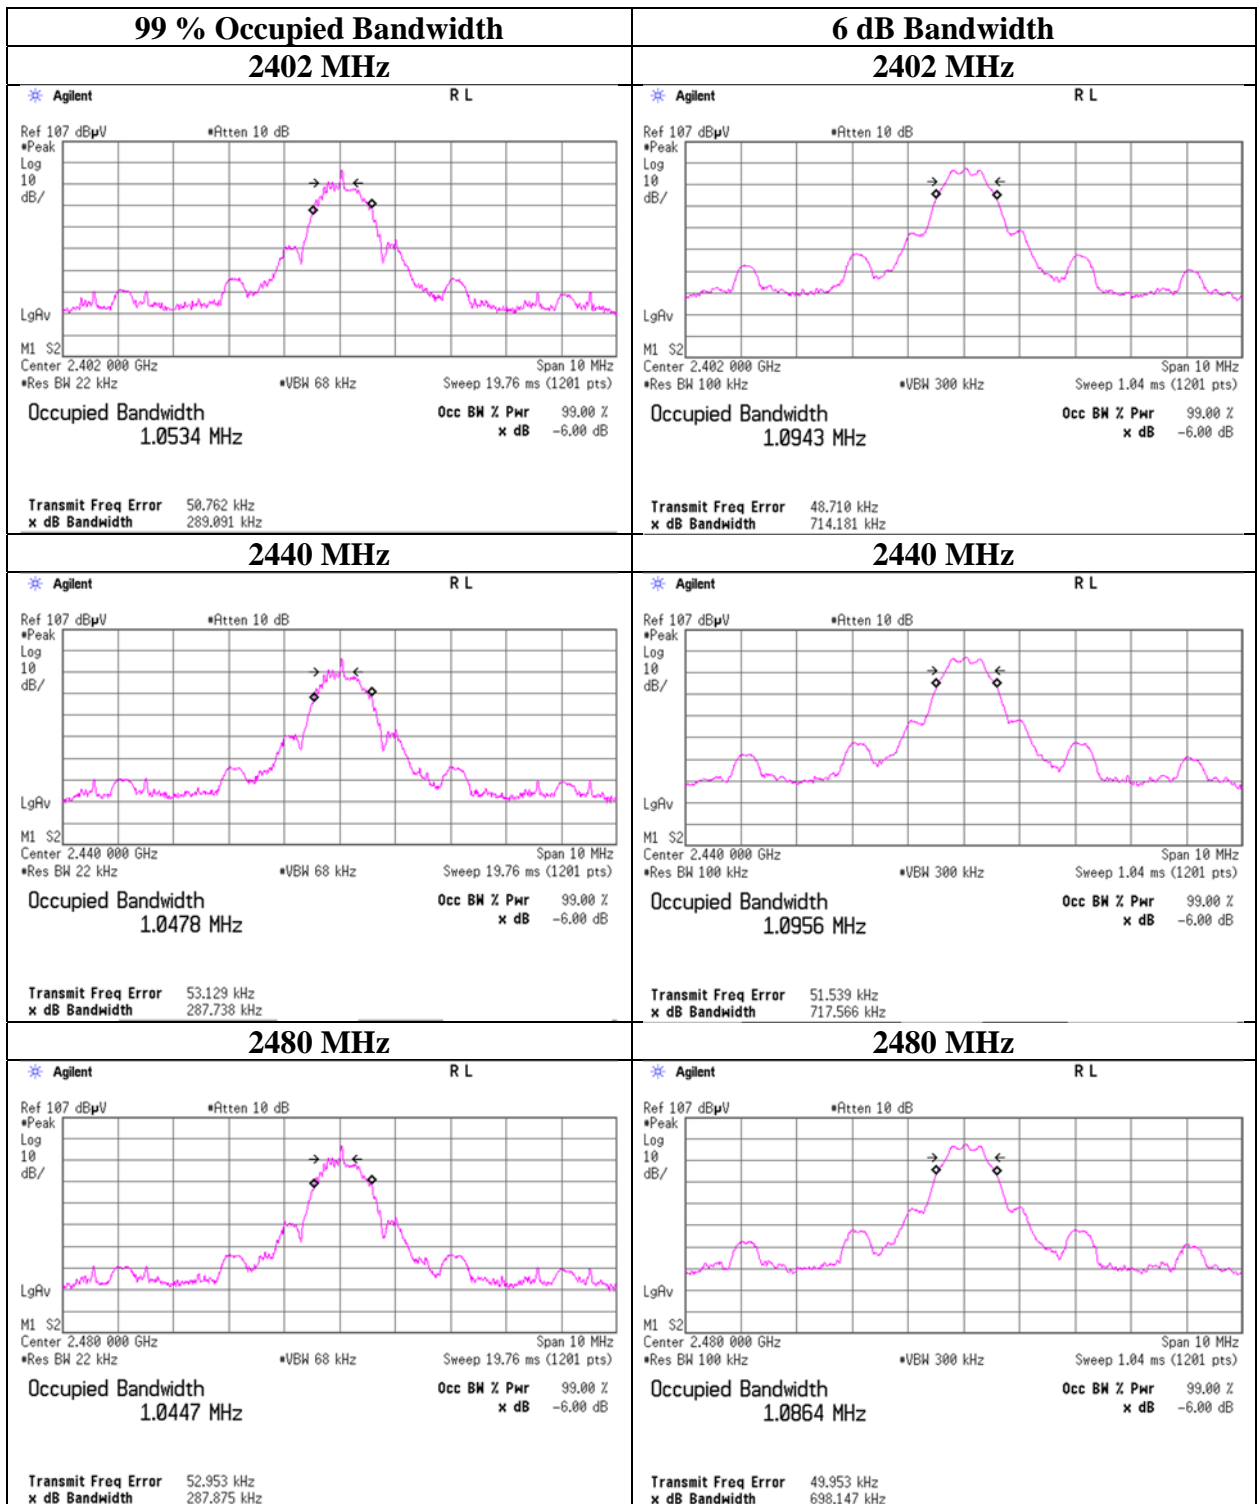

Maximum Peak Output Power

Report No. 14039670S-A
 Test place Shonan EMC Lab. No.1 Shielded Room
 Date February 4, 2022
 Temperature / Humidity 25 deg. C / 25 % RH
 Engineer Takahiro Kawakami
 Mode Tx BT LE

| Freq. | Reading | Cable Loss | Atten. Loss | Conducted Power | | | | | e.i.r.p. for RSS-247 | | | | | |
|-------|---------|------------|-------------|-----------------|------|-------|------|--------|----------------------|--------|-------|-------|------|--------|
| | | | | Result | | Limit | | Margin | Antenna Gain | Result | | Limit | | Margin |
| | | | | [dBm] | [mW] | [dBm] | [mW] | | | [dB] | [dBi] | [dBm] | [mW] | |
| 2402 | -12.30 | 1.31 | 9.92 | -1.07 | 0.78 | 30.00 | 1000 | 31.07 | 2.50 | 1.43 | 1.39 | 36.02 | 4000 | 34.59 |
| 2440 | -12.49 | 1.31 | 9.92 | -1.26 | 0.75 | 30.00 | 1000 | 31.26 | 2.50 | 1.24 | 1.33 | 36.02 | 4000 | 34.78 |
| 2480 | -12.28 | 1.32 | 9.92 | -1.04 | 0.79 | 30.00 | 1000 | 31.04 | 2.50 | 1.46 | 1.40 | 36.02 | 4000 | 34.56 |

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Average Output Power
(Reference data for RF Exposure)

Report No. 14039670S-A
Test place Shonan EMC Lab. No.1 Shielded Room
Date February 4, 2022
Temperature / Humidity 25 deg. C / 25 % RH
Engineer Takahiro Kawakami
Mode Tx BT LE

| Freq. [MHz] | Reading [dBm] | Cable Loss [dB] | Atten. Loss [dB] | Result (Time average) | | Duty factor [dB] | Result (Burst power average) | |
|----------------|------------------|-----------------------|------------------------|--------------------------|------|------------------------|---------------------------------|------|
| | | | | [dBm] | [mW] | | [dBm] | [mW] |
| 2402 | -14.68 | 1.31 | 9.92 | -3.45 | 0.45 | 1.65 | -1.80 | 0.66 |
| 2440 | -14.89 | 1.31 | 9.92 | -3.66 | 0.43 | 1.65 | -2.01 | 0.63 |
| 2480 | -14.63 | 1.34 | 9.92 | -3.37 | 0.46 | 1.65 | -1.72 | 0.67 |


Sample Calculation:

Result (Time average) = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

Result (Burst power average) = Time average + Duty factor

Burst rate confirmation

| | |
|------------------------|------------------------------------|
| Report No. | 14039670S-A |
| Test place | Shonan EMC Lab. No.1 Shielded Room |
| Date | February 4, 2022 |
| Temperature / Humidity | 25 deg. C / 25 % RH |
| Engineer | Takahiro Kawakami |
| Mode | Tx BT LE |

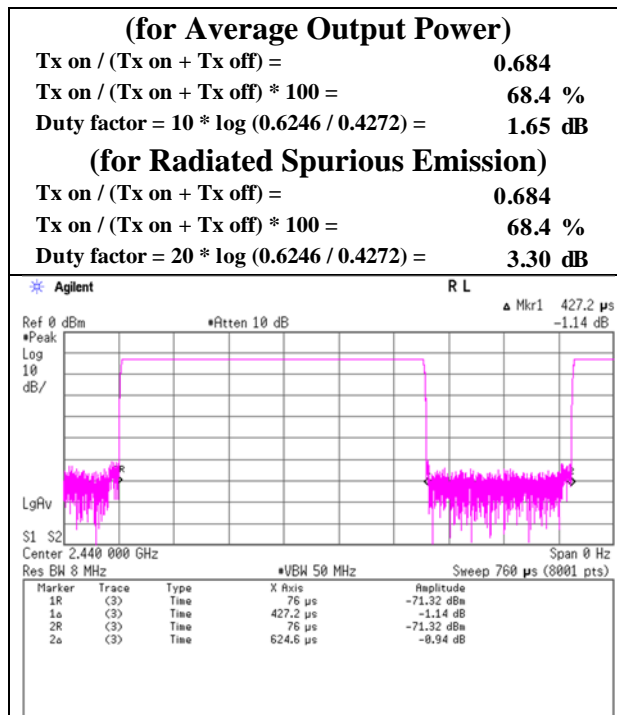

* Since the burst rate is not different between the channels, the data has been obtained on the representative channel.

Radiated Spurious Emission

Report No. 14039670S-A
 Test place Shonan EMC Lab.
 Semi Anechoic Chamber No.3
 Date February 5, 2022
 Temperature / Humidity 23 deg. C / 28 % RH
 Engineer Kenichi Adachi

 Mode Tx BT LE, 2402 MHz

(* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|-------------|-------------------|
| Hori. | 2390.000 | PK | 47.58 | 28.33 | 14.30 | 41.62 | 2.44 | 51.03 | 73.9 | 22.8 | 209 | 146 | - |
| Hori. | 4804.000 | PK | 54.92 | 31.77 | 6.71 | 42.89 | 2.44 | 52.95 | 73.9 | 20.9 | 233 | 324 | - |
| Hori. | 7206.000 | PK | 47.57 | 37.37 | 8.14 | 43.39 | 2.44 | 52.13 | 73.9 | 21.7 | 150 | 0 | - |
| Hori. | 9608.000 | PK | 48.97 | 39.12 | 9.39 | 43.18 | 2.44 | 56.74 | 73.9 | 17.1 | 150 | 0 | - |
| Hori. | 12010.000 | PK | 50.56 | 38.32 | 10.27 | 42.58 | -9.54 | 47.03 | 73.9 | 26.8 | 144 | 342 | - |
| Hori. | 7206.000 | AV | 38.76 | 37.37 | 8.14 | 43.39 | 2.44 | 43.32 | 53.9 | 10.5 | 150 | 0 | floor noise level |
| Hori. | 9608.000 | AV | 39.78 | 39.12 | 9.39 | 43.18 | 2.44 | 47.55 | 53.9 | 6.3 | 150 | 0 | floor noise level |
| Vert. | 2390.000 | PK | 47.56 | 28.33 | 14.30 | 41.62 | 2.44 | 51.01 | 73.9 | 22.8 | 225 | 269 | - |
| Vert. | 4804.000 | PK | 53.93 | 31.77 | 6.71 | 42.89 | 2.44 | 51.96 | 73.9 | 21.9 | 242 | 327 | - |
| Vert. | 7206.000 | PK | 47.68 | 37.37 | 8.14 | 43.39 | 2.44 | 52.24 | 73.9 | 21.6 | 150 | 0 | - |
| Vert. | 9608.000 | PK | 49.11 | 39.12 | 9.39 | 43.18 | 2.44 | 56.88 | 73.9 | 17.0 | 150 | 0 | - |
| Vert. | 12010.000 | PK | 50.44 | 38.32 | 10.27 | 42.58 | -9.54 | 46.91 | 73.9 | 26.9 | 121 | 10 | - |
| Vert. | 7206.000 | AV | 38.89 | 37.37 | 8.14 | 43.39 | 2.44 | 43.45 | 53.9 | 10.4 | 150 | 0 | floor noise level |
| Vert. | 9608.000 | AV | 39.85 | 39.12 | 9.39 | 43.18 | 2.44 | 47.62 | 53.9 | 6.2 | 150 | 0 | floor noise level |

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.97\text{ m} / 3.0\text{ m}) = 2.44\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Average measurement value with duty factor

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Duty Factor [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|------------------|----------------------|-----------------|----------------|-------------|--------|
| Hori. | 2390.000 | AV | 37.70 | 28.33 | 14.30 | 41.62 | 3.30 | 2.44 | 44.45 | 53.9 | 9.4 | *1) |
| Hori. | 4804.000 | AV | 46.94 | 31.77 | 6.71 | 42.89 | 3.30 | 2.44 | 48.27 | 53.9 | 5.6 | - |
| Hori. | 12010.000 | AV | 40.87 | 38.32 | 10.27 | 42.58 | 3.30 | -9.54 | 40.64 | 53.9 | 13.2 | - |
| Vert. | 2390.000 | AV | 37.72 | 28.33 | 14.30 | 41.62 | 3.30 | 2.44 | 44.47 | 53.9 | 9.4 | *1) |
| Vert. | 4804.000 | AV | 45.92 | 31.77 | 6.71 | 42.89 | 3.30 | 2.44 | 47.25 | 53.9 | 6.6 | - |
| Vert. | 12010.000 | AV | 40.55 | 38.32 | 10.27 | 42.58 | 3.30 | -9.54 | 40.32 | 53.9 | 13.5 | - |

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Duty factor + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.97\text{ m} / 3.0\text{ m}) = 2.44\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Duty factor refer to "Burst rate confirmation" sheet.

*1) Not out of band emission (Leakage Power)

20 dBc Data Sheet (RBW 100 kHz, VBW 300 kHz)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|---------|
| Hori. | 2402.000 | PK | 75.38 | 28.31 | 14.32 | 41.63 | 2.44 | 78.82 | - | - | Carrier |
| Hori. | 2400.000 | PK | 40.76 | 28.31 | 14.32 | 41.63 | 2.44 | 44.20 | 58.8 | 14.6 | - |
| Vert. | 2402.000 | PK | 68.95 | 28.31 | 14.32 | 41.63 | 2.44 | 72.39 | - | - | Carrier |
| Vert. | 2400.000 | PK | 39.28 | 28.31 | 14.32 | 41.63 | 2.44 | 42.72 | 52.3 | 9.5 | - |

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor



Distance factor : 1 GHz - 10 GHz : $20\log(3.97\text{ m} / 3.0\text{ m}) = 2.44\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Radiated Spurious Emission (Reference Plot for band-edge)

| | |
|------------------------|---------------------|
| Report No. | 14039670S-A |
| Test place | Shonan EMC Lab. |
| Semi Anechoic Chamber | No.3 |
| Date | February 5, 2022 |
| Temperature / Humidity | 23 deg. C / 28 % RH |
| Engineer | Kenichi Adachi |

Mode Tx BT LE, 2402 MHz

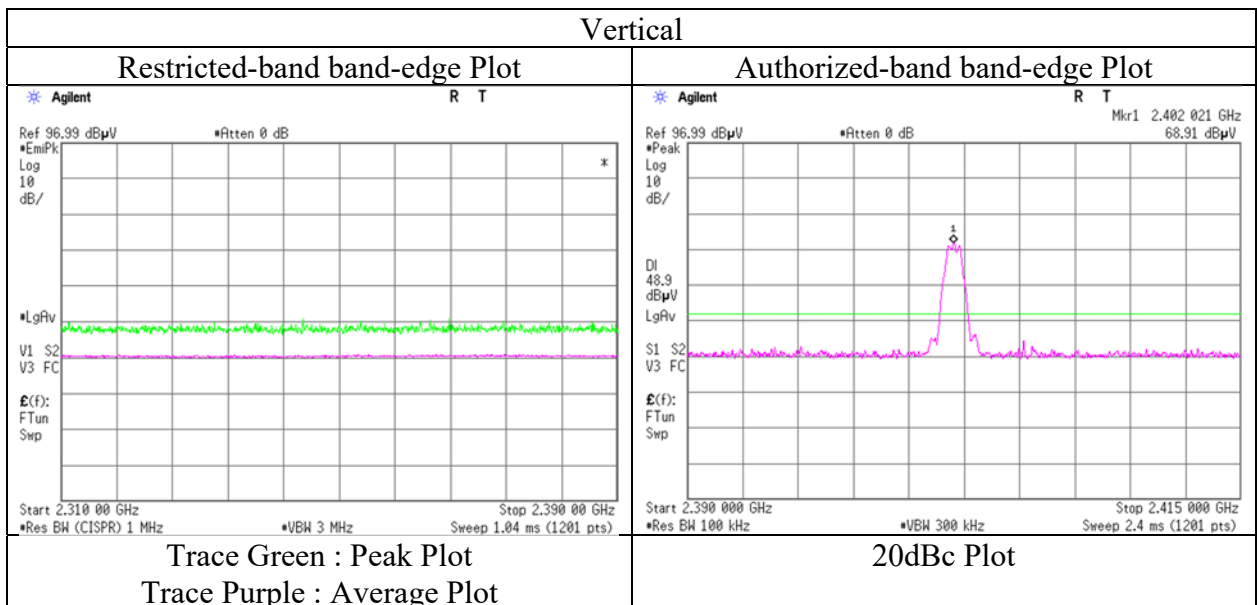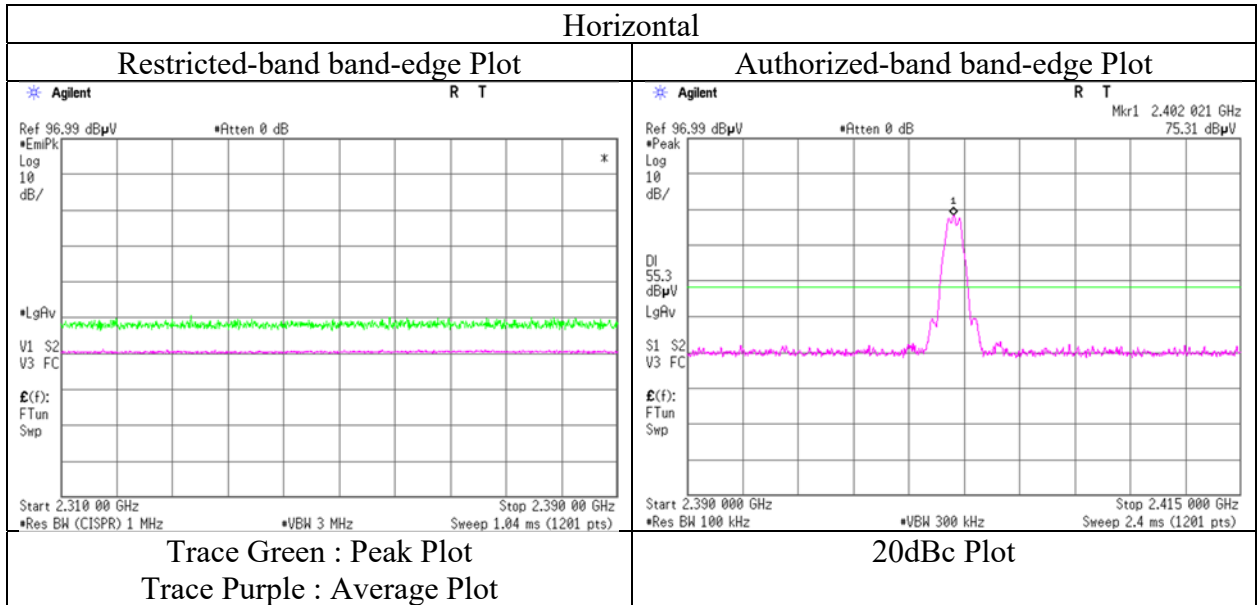

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Report No. 14039670S-A
 Test place Shonan EMC Lab.
 Semi Anechoic Chamber No.3
 Date February 5, 2022
 Temperature / Humidity 23 deg. C / 28 % RH
 Engineer Kenichi Adachi

Mode Tx BT LE, 2440 MHz

(* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|-------------|-------------------|
| Hori. | 4880.000 | PK | 53.06 | 31.87 | 6.76 | 42.89 | 2.44 | 51.24 | 73.9 | 22.6 | 231 | 321 | - |
| Hori. | 7320.000 | PK | 48.88 | 37.53 | 8.21 | 43.52 | 2.44 | 53.54 | 73.9 | 20.3 | 150 | 0 | - |
| Hori. | 9760.000 | PK | 47.94 | 39.41 | 9.45 | 42.98 | 2.44 | 56.26 | 73.9 | 17.6 | 150 | 0 | - |
| Hori. | 12200.000 | PK | 50.29 | 38.42 | 10.33 | 42.39 | -9.54 | 47.11 | 73.9 | 26.7 | 143 | 334 | - |
| Hori. | 7320.000 | AV | 39.18 | 37.53 | 8.21 | 43.52 | 2.44 | 43.84 | 53.9 | 10.0 | 150 | 0 | floor noise level |
| Hori. | 9760.000 | AV | 39.24 | 39.41 | 9.45 | 42.98 | 2.44 | 47.56 | 53.9 | 6.3 | 150 | 0 | floor noise level |
| Vert. | 4880.000 | PK | 52.28 | 31.87 | 6.76 | 42.89 | 2.44 | 50.46 | 73.9 | 23.4 | 239 | 311 | - |
| Vert. | 7320.000 | PK | 48.98 | 37.53 | 8.21 | 43.52 | 2.44 | 53.64 | 73.9 | 20.2 | 150 | 0 | - |
| Vert. | 9760.000 | PK | 48.08 | 39.41 | 9.45 | 42.98 | 2.44 | 56.40 | 73.9 | 17.5 | 150 | 0 | - |
| Vert. | 12200.000 | PK | 50.12 | 38.42 | 10.33 | 42.39 | -9.54 | 46.94 | 73.9 | 26.9 | 120 | 7 | - |
| Vert. | 7320.000 | AV | 39.22 | 37.53 | 8.21 | 43.52 | 2.44 | 43.88 | 53.9 | 10.0 | 150 | 0 | floor noise level |
| Vert. | 9760.000 | AV | 39.12 | 39.41 | 9.45 | 42.98 | 2.44 | 47.44 | 53.9 | 6.4 | 150 | 0 | floor noise level |

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor
 Distance factor : 1 GHz - 10 GHz : $20\log(3.97\text{ m} / 3.0\text{ m}) = 2.44\text{ dB}$
 10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Average measurement value with duty factor

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Duty Factor [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|------------------|----------------------|-----------------|----------------|-------------|--------|
| Hori. | 4880.000 | AV | 45.02 | 31.87 | 6.76 | 42.89 | 3.30 | 2.44 | 46.50 | 53.9 | 7.4 | - |
| Hori. | 12200.000 | AV | 40.66 | 38.42 | 10.33 | 42.39 | 3.30 | -9.54 | 40.78 | 53.9 | 13.1 | - |
| Vert. | 4880.000 | AV | 44.59 | 31.87 | 6.76 | 42.89 | 3.30 | 2.44 | 46.07 | 53.9 | 7.8 | - |
| Vert. | 12200.000 | AV | 40.24 | 38.42 | 10.33 | 42.39 | 3.30 | -9.54 | 40.36 | 53.9 | 13.5 | - |

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Duty factor + Distance factor
 Distance factor : 1 GHz - 10 GHz : $20\log(3.97\text{ m} / 3.0\text{ m}) = 2.44\text{ dB}$
 10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$
 Duty factor refer to "Burst rate confirmation" sheet.

Radiated Spurious Emission

| | | |
|------------------------|---------------------|---------------------|
| Report No. | 14039670S-A | |
| Test place | Shonan EMC Lab. | |
| Semi Anechoic Chamber | No.1 | No.3 |
| Date | February 4, 2022 | February 5, 2022 |
| Temperature / Humidity | 21 deg. C / 27 % RH | 23 deg. C / 28 % RH |
| Engineer | Yusuke Tanikawara | Kenichi Adachi |
| | (30 MHz - 1 GHz) | (1 GHz - 26.5 GHz) |
| Mode | Tx BT LE, 2480 MHz | |

(* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|-------------|-------------------|
| Hori. | 165.821 | QP | 21.60 | 15.57 | 8.96 | 31.78 | 0.00 | 14.35 | 43.5 | 29.1 | 300 | 359 | - |
| Hori. | 271.179 | QP | 21.40 | 12.94 | 6.34 | 31.76 | 0.00 | 8.92 | 46.0 | 37.0 | 150 | 1 | - |
| Hori. | 504.003 | QP | 32.80 | 17.80 | 7.85 | 31.93 | 0.00 | 26.52 | 46.0 | 19.4 | 175 | 50 | - |
| Hori. | 584.003 | QP | 31.10 | 18.84 | 8.28 | 32.03 | 0.00 | 26.19 | 46.0 | 19.8 | 161 | 37 | - |
| Hori. | 783.998 | QP | 24.90 | 20.66 | 9.31 | 31.95 | 0.00 | 22.92 | 46.0 | 23.0 | 100 | 84 | - |
| Hori. | 2483.500 | PK | 47.94 | 28.24 | 14.40 | 41.65 | 2.44 | 51.37 | 73.9 | 22.5 | 214 | 143 | - |
| Hori. | 4960.000 | PK | 50.98 | 32.14 | 6.82 | 42.89 | 2.44 | 49.49 | 73.9 | 24.4 | 218 | 262 | - |
| Hori. | 7440.000 | PK | 47.44 | 37.62 | 8.26 | 43.65 | 2.44 | 52.11 | 73.9 | 21.7 | 150 | 0 | - |
| Hori. | 9920.000 | PK | 47.08 | 39.30 | 9.53 | 42.77 | 2.44 | 55.58 | 73.9 | 18.3 | 150 | 0 | - |
| Hori. | 12400.000 | PK | 49.98 | 38.28 | 10.40 | 42.20 | -9.54 | 46.92 | 73.9 | 26.9 | 141 | 339 | - |
| Hori. | 7440.000 | AV | 38.46 | 37.62 | 8.26 | 43.65 | 2.44 | 43.13 | 53.9 | 10.7 | 150 | 0 | floor noise level |
| Hori. | 9920.000 | AV | 38.15 | 39.30 | 9.53 | 42.77 | 2.44 | 46.65 | 53.9 | 7.2 | 150 | 0 | floor noise level |
| Vert. | 44.778 | QP | 21.90 | 13.09 | 7.39 | 31.82 | 0.00 | 10.56 | 40.0 | 29.4 | 100 | 348 | - |
| Vert. | 240.562 | QP | 21.60 | 11.55 | 6.10 | 31.75 | 0.00 | 7.50 | 46.0 | 38.5 | 100 | 359 | - |
| Vert. | 340.648 | QP | 26.20 | 14.88 | 6.84 | 31.77 | 0.00 | 16.15 | 46.0 | 29.8 | 126 | 144 | - |
| Vert. | 432.006 | QP | 32.00 | 16.14 | 7.44 | 31.87 | 0.00 | 23.71 | 46.0 | 22.2 | 148 | 355 | - |
| Vert. | 820.663 | QP | 21.40 | 20.83 | 9.50 | 31.83 | 0.00 | 19.90 | 46.0 | 26.1 | 150 | 1 | - |
| Vert. | 2483.500 | PK | 47.38 | 28.24 | 14.40 | 41.65 | 2.44 | 50.81 | 73.9 | 23.0 | 214 | 241 | - |
| Vert. | 4960.000 | PK | 51.86 | 32.14 | 6.82 | 42.89 | 2.44 | 50.37 | 73.9 | 23.5 | 212 | 307 | - |
| Vert. | 7440.000 | PK | 47.48 | 37.62 | 8.26 | 43.65 | 2.44 | 52.15 | 73.9 | 21.7 | 150 | 0 | - |
| Vert. | 9920.000 | PK | 47.16 | 39.30 | 9.53 | 42.77 | 2.44 | 55.66 | 73.9 | 18.2 | 150 | 0 | - |
| Vert. | 12400.000 | PK | 49.96 | 38.28 | 10.40 | 42.20 | -9.54 | 46.90 | 73.9 | 27.0 | 125 | 4 | - |
| Vert. | 7440.000 | AV | 38.52 | 37.62 | 8.26 | 43.65 | 2.44 | 43.19 | 53.9 | 10.7 | 150 | 0 | floor noise level |
| Vert. | 9920.000 | AV | 38.22 | 39.30 | 9.53 | 42.77 | 2.44 | 46.72 | 53.9 | 7.1 | 150 | 0 | floor noise level |

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.97\text{ m} / 3.0\text{ m}) = 2.44\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Average measurement value with duty factor

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Duty Factor [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|------------------|----------------------|-----------------|----------------|-------------|--------|
| Hori. | 2483.500 | AV | 37.96 | 28.24 | 14.40 | 41.65 | 3.30 | 2.44 | 44.69 | 53.9 | 9.2 | *1) |
| Hori. | 4960.000 | AV | 42.28 | 32.14 | 6.82 | 42.89 | 3.30 | 2.44 | 44.09 | 53.9 | 9.8 | - |
| Hori. | 12400.000 | AV | 40.46 | 38.28 | 10.40 | 42.20 | 3.30 | -9.54 | 40.70 | 53.9 | 13.2 | - |
| Vert. | 2483.500 | AV | 37.86 | 28.24 | 14.40 | 41.65 | 3.30 | 2.44 | 44.59 | 53.9 | 9.3 | *1) |
| Vert. | 4960.000 | AV | 43.06 | 32.14 | 6.82 | 42.89 | 3.30 | 2.44 | 44.87 | 53.9 | 9.0 | - |
| Vert. | 12400.000 | AV | 39.93 | 38.28 | 10.40 | 42.20 | 3.30 | -9.54 | 40.17 | 53.9 | 13.7 | - |

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Duty factor + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.97\text{ m} / 3.0\text{ m}) = 2.44\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$



Duty factor refer to "Burst rate confirmation" sheet.

*1) Not out of band emission (Leakage Power)

Radiated Spurious Emission (Reference Plot for band-edge)

Report No. 14039670S-A
Test place Shonan EMC Lab.
Semi Anechoic Chamber No.3
Date February 5, 2022
Temperature / Humidity 23 deg. C / 28 % RH
Engineer Kenichi Adachi


Mode Tx BT LE, 2480 MHz

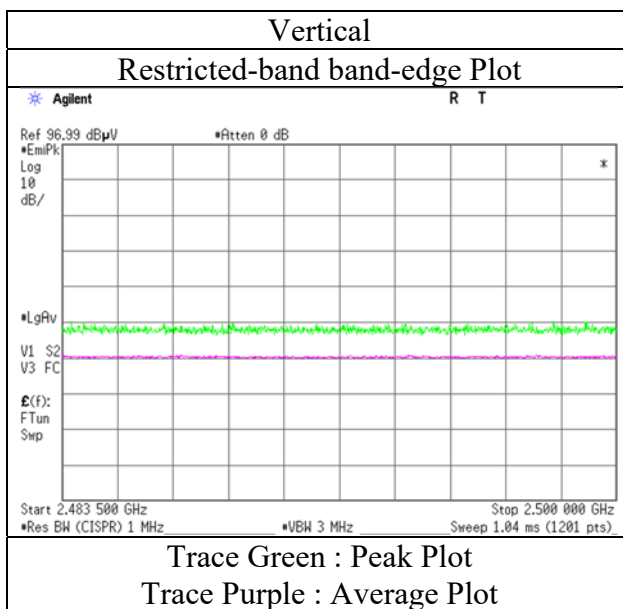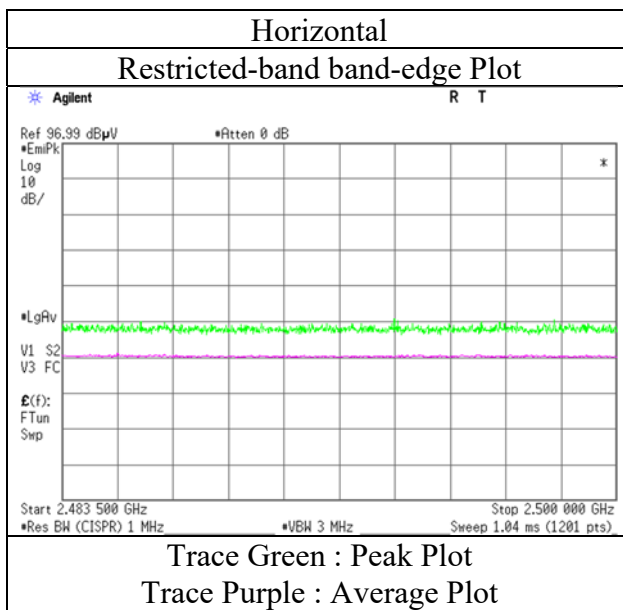

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission
(Plot data, Worst case mode for Maximum Peak Output Power)


| | | |
|------------------------|---------------------------------------|--------------------------------------|
| Report No. | 14039670S-A | |
| Test place | Shonan EMC Lab. | |
| Semi Anechoic Chamber | No.1 | No.3 |
| Date | February 4, 2022 | February 5, 2022 |
| Temperature / Humidity | 21 deg. C / 27 % RH | 23 deg. C / 28 % RH |
| Engineer | Yusuke Tanikawara (30 MHz - 1 GHz) | Kenichi Adachi (1 GHz - 26.5 GHz) |
| Mode | Tx BT LE, 2480 MHz | |

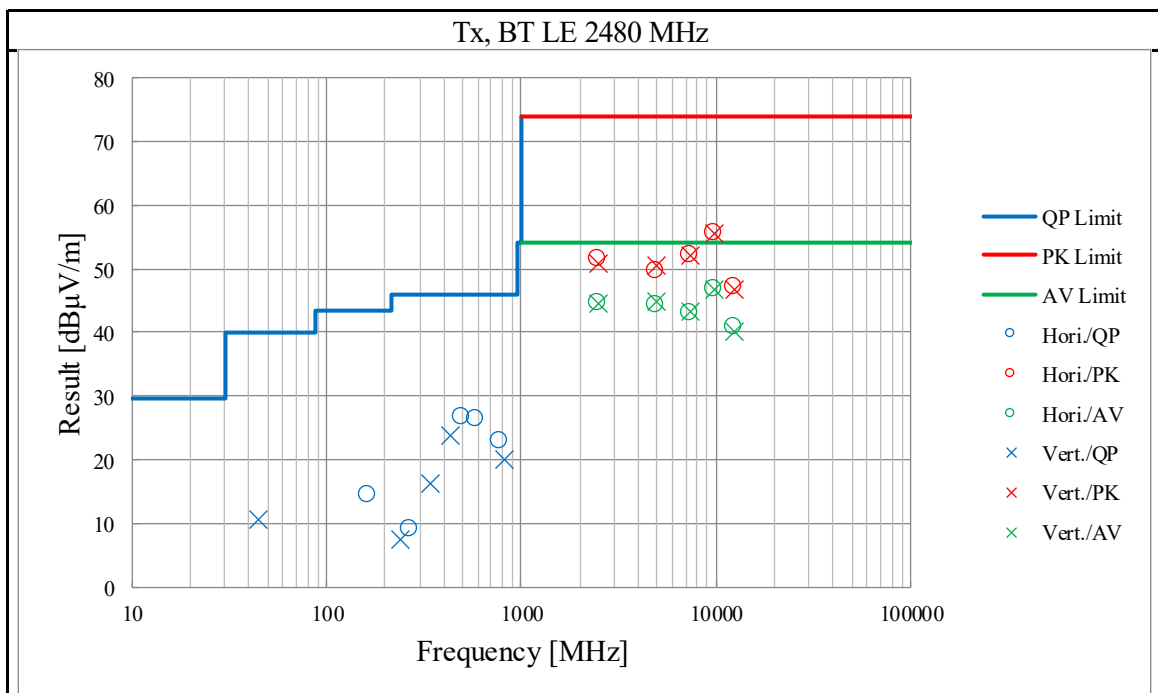

*These plots data contains sufficient number to show the trend of characteristic features for EUT.

Conducted Spurious Emission

Report No. 14039670S-A
 Test place Shonan EMC Lab. No.1 Shielded Room
 Date February 4, 2022
 Temperature / Humidity 25 deg. C / 25 % RH
 Engineer Takahiro Kawakami
 Mode Tx BT LE 2402 MHz

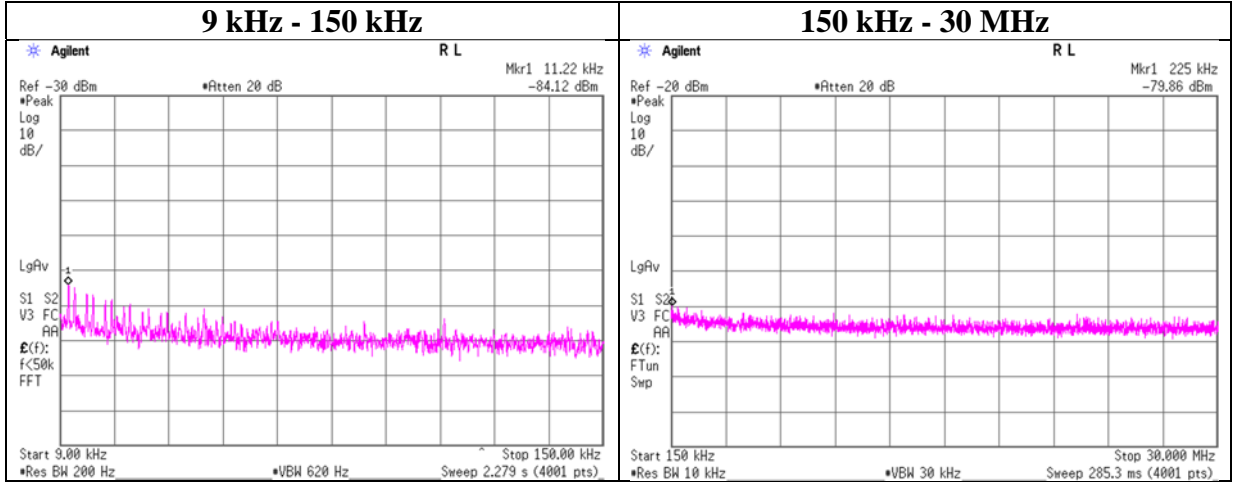

| Frequency [kHz] | Reading [dBm] | Cable Loss [dB] | Attenuator Loss [dB] | Antenna Gain [dBi] | N (Number of Output) | EIRP [dBm] | Distance [m] | Ground bounce [dB] | E (field strength) [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark |
|-----------------|---------------|-----------------|----------------------|--------------------|----------------------|------------|--------------|--------------------|-----------------------------|----------------|-------------|--------|
| 11.22 | -84.12 | 0.01 | 9.83 | 2.5 | 1 | -71.8 | 300 | 6.0 | -10.5 | 46.6 | 57.1 | - |
| 225.00 | -79.86 | 0.01 | 9.83 | 2.5 | 1 | -67.5 | 300 | 6.0 | -6.3 | 20.5 | 26.8 | - |


$E [dBuV/m] = EIRP [dBm] - 20 \log (Distance [m]) + Ground\ bounce [dB] + 104.8 [dBuV/m]$

$EIRP[dBm] = Reading [dBm] + Cable\ loss [dB] + Attenuator\ Loss [dB] + Antenna\ gain [dBi] + 10 * \log (N)$

N: Number of output

Conducted Spurious Emission

Report No. 14039670S-A
 Test place Shonan EMC Lab. No.1 Shielded Room
 Date February 4, 2022
 Temperature / Humidity 25 deg. C / 25 % RH
 Engineer Takahiro Kawakami
 Mode Tx BT LE 2440 MHz

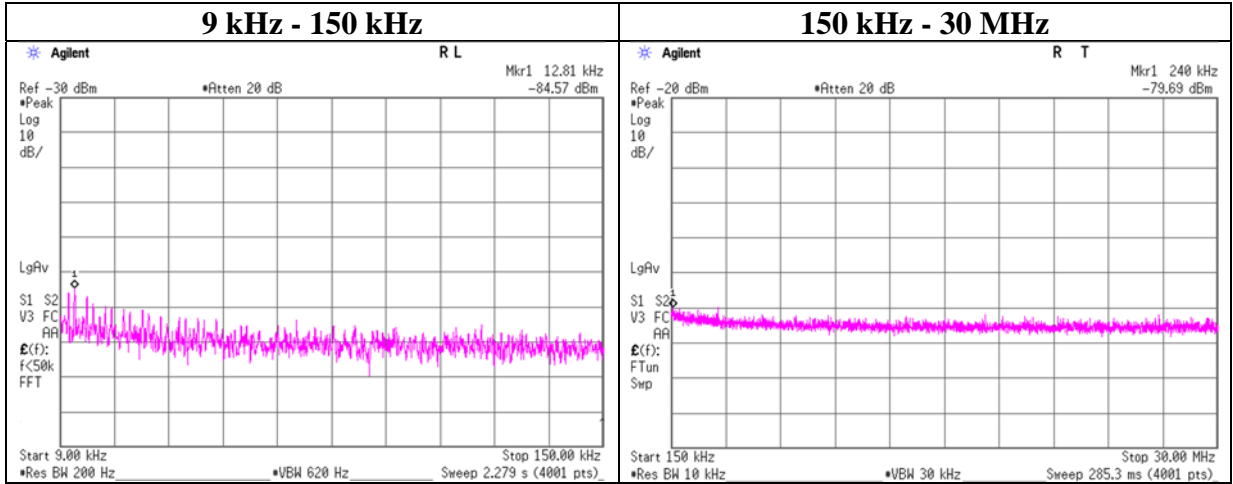

| Frequency [kHz] | Reading [dBm] | Cable Loss [dB] | Attenuator Loss [dB] | Antenna Gain [dBi] | N (Number of Output) | EIRP [dBm] | Distance [m] | Ground bounce [dB] | E (field strength) [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark |
|-----------------|---------------|-----------------|----------------------|--------------------|----------------------|------------|--------------|--------------------|-----------------------------|----------------|-------------|--------|
| 12.81 | -84.57 | 0.01 | 9.83 | 2.5 | 1 | -72.2 | 300 | 6.0 | -11.0 | 45.4 | 56.4 | - |
| 240.00 | -79.69 | 0.01 | 9.83 | 2.5 | 1 | -67.4 | 300 | 6.0 | -6.1 | 20.0 | 26.1 | - |


$E \text{ [dBuV/m]} = \text{EIRP [dBm]} - 20 \log(\text{Distance [m]}) + \text{Ground bounce [dB]} + 104.8 \text{ [dBuV/m]}$

$\text{EIRP [dBm]} = \text{Reading [dBm]} + \text{Cable loss [dB]} + \text{Attenuator Loss [dB]} + \text{Antenna gain [dBi]} + 10 * \log(N)$

N: Number of output

Conducted Spurious Emission

| | |
|------------------------|------------------------------------|
| Report No. | 14039670S-A |
| Test place | Shonan EMC Lab. No.1 Shielded Room |
| Date | February 4, 2022 |
| Temperature / Humidity | 25 deg. C / 25 % RH |
| Engineer | Takahiro Kawakami |
| Mode | Tx BT LE 2480 MHz |

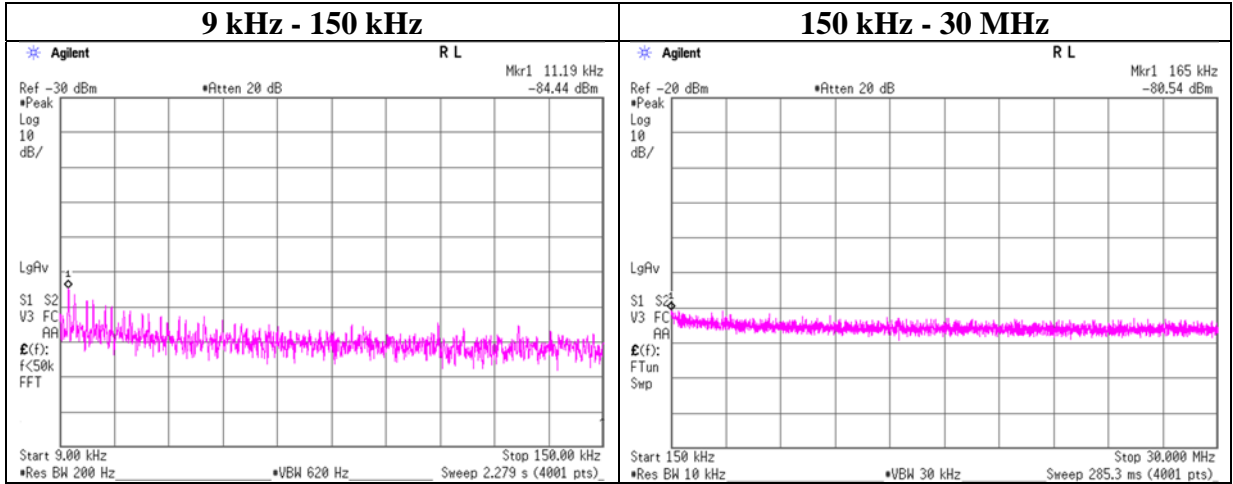

| Frequency [kHz] | Reading [dBm] | Cable Loss [dB] | Attenuator Loss [dB] | Antenna Gain [dBi] | N (Number of Output) | EIRP [dBm] | Distance [m] | Ground bounce [dB] | E (field strength) [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark |
|-----------------|---------------|-----------------|----------------------|--------------------|----------------------|------------|--------------|--------------------|-----------------------------|----------------|-------------|--------|
| 11.19 | -84.44 | 0.01 | 9.83 | 2.5 | 1 | -72.1 | 300 | 6.0 | -10.8 | 46.6 | 57.4 | - |
| 165.00 | -80.54 | 0.01 | 9.83 | 2.5 | 1 | -68.2 | 300 | 6.0 | -6.9 | 23.2 | 30.1 | - |

$E \text{ [dBuV/m]} = \text{EIRP [dBm]} - 20 \log(\text{Distance [m]}) + \text{Ground bounce [dB]} + 104.8 \text{ [dBuV/m]}$

$\text{EIRP [dBm]} = \text{Reading [dBm]} + \text{Cable loss [dB]} + \text{Attenuator Loss [dB]} + \text{Antenna gain [dBi]} + 10 * \log(N)$

N: Number of output

Power Density

| | |
|------------------------|------------------------------------|
| Report No. | 14039670S-A |
| Test place | Shonan EMC Lab. No.1 Shielded Room |
| Date | February 4, 2022 |
| Temperature / Humidity | 25 deg. C / 25 % RH |
| Engineer | Takahiro Kawakami |
| Mode | Tx BT LE |


| Freq. [MHz] | Reading [dBm / 3 kHz] | Cable Loss [dB] | Atten. Loss [dB] | Result [dBm / 3 kHz] | Limit [dBm / 3 kHz] | Margin [dB] |
|----------------|--------------------------|-----------------------|------------------------|-------------------------|------------------------|----------------|
| 2402 | -26.41 | 1.31 | 9.92 | -15.18 | 8.00 | 23.18 |
| 2440 | -26.61 | 1.31 | 9.92 | -15.38 | 8.00 | 23.38 |
| 2480 | -26.60 | 1.32 | 9.92 | -15.36 | 8.00 | 23.36 |

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

*The equipment and cables were not used for factor 0 dB of the data sheets.

Power Density

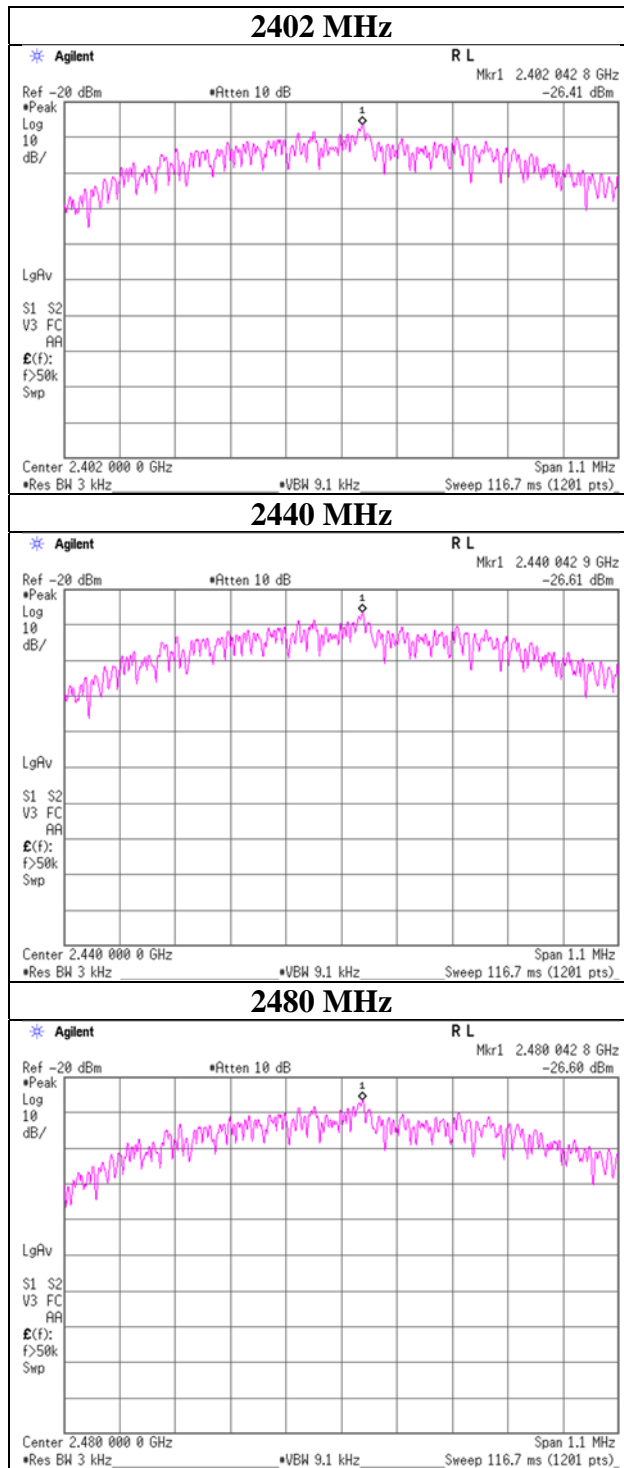

APPENDIX 2: Test Instruments

Test equipment (1/2)

| Test Item | Local ID | LIMS ID | Description | Manufacturer | Model | Serial | Last Calibration Date | Cal Int |
|-----------|--------------------------------|---------|---------------------------|--|--|-------------------------|-----------------------|---------|
| AT | KSA-08 | 145089 | Spectrum Analyzer | Keysight Technologies Inc | E4446A | MY46180525 | 2021/10/13 | 12 |
| AT | SAT10-12 | 151609 | Attenuator | Weinschel Corp. | 54A-10 | 81601 | 2021/03/01 | 12 |
| AT | SCC-G12 | 145040 | Coaxial Cable | Suhner | SUCOFLEX 102 | 30790/2 | 2021/03/04 | 12 |
| AT | SOS-16 | 167990 | Humidity Indicator | CUSTOM. Inc | CTH-202 | 708Q08R | 2021/10/14 | 12 |
| AT | SPM-07 | 146247 | Power Meter | Keysight Technologies Inc | 8990B | MY5100272 | 2021/05/25 | 12 |
| AT | SPSS-04 | 146310 | Power sensor | Keysight Technologies Inc | N1923A | MY5326009 | 2021/05/25 | 12 |
| AT,RE | STS-01 | 145792 | Digital Hitester | HIOKI E.E. CORPORATION | 3805-50 | 80997812 | 2021/09/14 | 12 |
| RE | COTS-SEMI-5 | 170932 | EMI Software | TSJ (Techno Science Japan) | TEPTO-DV3(RE,CE,ME,P E) | - | - | - |
| RE | KAT10-S2 | 144892 | Attenuator | Keysight Technologies Inc | 8490D 010 | 6036 | 2021/10/07 | 12 |
| RE | KAT6-04 | 144899 | Attenuator | Inmet | 18N-6dB | - | 2021/12/10 | 12 |
| RE | KBA-01 | 146343 | Biconical Antenna | Schwarzbeck Mess-Elektronik OHG | BBA9106 | 1748 | 2021/06/12 | 12 |
| RE | KJM-02 | 146432 | Measure | TAJIMA | GL19-55 | - | - | - |
| RE | SAEC-01(NSA) | 145597 | Semi-Anechoic Chamber | TDK | SAEC-01(NSA) | 1 | 2021/04/30 | 12 |
| RE | SAEC-03(SVSWR) | 145566 | Semi-Anechoic Chamber | TDK | SAEC-03(SVSWR) | 3 | 2021/05/21 | 12 |
| RE | SAF-01 | 145003 | Pre Amplifier | SONOMA | 310N | 290211 | 2021/02/10 | 12 |
| RE | SAF-06 | 145005 | Pre Amplifier | Toyo Corporation | TPA0118-36 | 1440491 | 2021/02/08 | 12 |
| RE | SAF-08 | 145007 | Pre Amplifier | Toyo Corporation | HAP18-26W | 19 | 2021/03/01 | 12 |
| RE | SAJ-03 | 146105 | Antenna Tilt Jig | Intelligent System Engineering Co., Ltd | Antenna Tilt Jig | T-S003 | - | - |
| RE | SAT3-09 | 144959 | Attenuator | JFW | 50HF-003N | - | 2021/08/16 | 12 |
| RE | SCC-A1/A3/A5/A7/A8/A13/SRSE-01 | 144967 | Coaxial Cable&RF Selector | Fujikura/Fujikura/Suhner/Suhner/Suhner/Suhner/TOYO | 8D2W/12DSFA/141PE/141PE/141PE/141PE/NS4906 | -/0901-269(RF Selector) | 2021/04/13 | 12 |
| RE | SCC-A2/A4/A6/A7/A8/A13/SRSE-01 | 144968 | Coaxial Cable&RF Selector | Fujikura/Fujikura/Suhner/Suhner/Suhner/Suhner/TOYO | 8D2W/12DSFA/141PE/141PE/141PE/141PE/NS4906 | -/0901-269(RF Selector) | 2021/04/12 | 12 |
| RE | SCC-G15 | 145176 | Coaxial Cable | Suhner | SUCOFLEX 102 | 32703/2 | 2021/03/01 | 12 |
| RE | SCC-G40 | 166491 | Coaxial Cable | Junkosha | MWX221-01000NFSNMS/B | 1612S005 | 2022/01/06 | 12 |
| RE | SCC-G43 | 156380 | Coaxial Cable | Huber+Suhner | SUCOFLEX_104_E | SN MY 13406/4E | 2021/05/17 | 12 |
| RE | SCC-G57 | 179540 | Coaxial Cable | Huber+Suhner | SUCOFLEX 102 | 802815/2 | 2021/05/18 | 12 |

Test equipment (2/2)

| Test Item | Local ID | LIMS ID | Description | Manufacturer | Model | Serial | Last Calibration Date | Cal Int |
|-----------|----------|---------|------------------------------|---------------------------------|--------------|------------|-----------------------|---------|
| RE | SCC-G58 | 183047 | Coaxial Cable | Huber+Suhner | SUCOFLEX 104 | 800287/4A | 2021/05/17 | 12 |
| RE | SCC-G70 | 200010 | Coaxial Cable | Huber+Suhner | SUCOFLEX 104 | 575618/4 | 2021/07/06 | 12 |
| RE | SFL-18 | 145305 | Highpass Filter | MICRO-TRONICS | HPM50111 | 119 | 2021/04/08 | 12 |
| RE | SHA-03 | 145501 | Horn Antenna | Schwarzbeck Mess-Elektronik OHG | BBHA9120D | 9120D-739 | 2021/06/14 | 12 |
| RE | SHA-04 | 145512 | Horn Antenna | ETS-Lindgren | 3160-09 | 00094868 | 2021/06/14 | 12 |
| RE | SHA-10 | 194685 | Horn Antenna | Schwarzbeck Mess-Elektronik OHG | BBHA 9120 C | 711 | 2021/03/03 | 12 |
| RE | SJM-21 | 207278 | Measuring Tool, Tape Measure | ASKUL | - | - | - | - |
| RE | SLA-05 | 145527 | Logperiodic Antenna | Schwarzbeck Mess-Elektronik OHG | VUSLP9111B | 193 | 2021/04/10 | 12 |
| RE | SOS-20 | 191837 | Humidity Indicator | CUSTOM. Inc | CTH-201 | - | 2021/08/02 | 12 |
| RE | SOS-23 | 191840 | Humidity Indicator | CUSTOM. Inc | CTH-201 | - | 2021/08/02 | 12 |
| RE | SSA-02 | 145800 | Spectrum Analyzer | Keysight Technologies Inc | E4448A | MY48250106 | 2021/04/13 | 12 |
| RE | STR-01 | 145790 | Test Receiver | Rohde & Schwarz | ESU40 | 100093 | 2021/04/27 | 12 |
| RE | STS-03 | 146210 | Digital Hitester | HIOKI E.E. CORPORATION | 3805-50 | 80997823 | 2021/09/14 | 12 |

*Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item: **RE: Radiated Emission**
 AT: Antenna Terminal Conducted