







RADIO TEST REPORT

Test Report No. 14584347S-A-R1

Customer	CASIO COMPUTER CO., LTD.
Description of EUT	Watch
Model Number of EUT	OCW-T6000 (Bluetooth Module: CW5712 is contained.)
FCC ID	BBQS42W
Test Regulation	FCC Part 15 Subpart C
Test Result	Complied (Refer to SECTION 3)
Issue Date	April 28, 2023
Remarks	-

Representative Test Engineer	Approved By
	
Yohsuke Matsuzawa Engineer	Akio Hayashi Manager
 	
CERTIFICATE 1266.03	
<input type="checkbox"/> The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan, Inc.	
<input checked="" type="checkbox"/> There is no testing item of "Non-accreditation".	

Report Cover Page - Form-ULID-003532 (DCS:13-EM-F0429) Issue# 21.0

ANNOUNCEMENT

- This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
- The results in this report apply only to the sample tested. (Laboratory was not involved in sampling.)
- This sample tested is in compliance with the limits of the above regulation.
- The test results in this test report are traceable to the national or international standards.
- This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
- This test report covers Radio technical requirements.
It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
- The all test items in this test report are conducted by UL Japan, Inc. Shonan EMC Lab.
- The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan, Inc. has been accredited.
- The information provided from the customer for this report is identified in Section 1.
- For test report(s) referred in this report, the latest version (including any revisions) is always referred.

REVISION HISTORY

Original Test Report No.: 14584347S-A

This report is a revised version of 14584347S-A. 14584347S-A is replaced with this report.

Revision	Test Report No.	Date	Page Revised Contents																																																																																
- (Original)	14584347S-A	January 31, 2023	-																																																																																
1	14584347S-A-R1	April 28, 2023	<p>Page 16 Corrected duty factor and result at 2402 MHz, 2440 MHz and 2480 MHz as follows.</p> <p>[Before correction]</p> <table border="1"> <thead> <tr> <th rowspan="2">Freq. [MHz]</th> <th rowspan="2">Reading [dBm]</th> <th rowspan="2">Cable Loss [dB]</th> <th rowspan="2">Atten. Loss [dB]</th> <th colspan="2">Result (Time average)</th> <th rowspan="2">Duty factor [dB]</th> <th colspan="2">Result (Burst power average)</th> </tr> <tr> <th>[dBm]</th> <th>[mW]</th> <th>[dBm]</th> <th>[mW]</th> </tr> </thead> <tbody> <tr> <td>2402</td> <td>-13.86</td> <td>0.86</td> <td>9.98</td> <td>-3.02</td> <td>0.50</td> <td>1.68</td> <td>-1.34</td> <td>0.73</td> </tr> <tr> <td>2440</td> <td>-13.88</td> <td>0.86</td> <td>9.98</td> <td>-3.04</td> <td>0.50</td> <td>1.68</td> <td>-1.36</td> <td>0.73</td> </tr> <tr> <td>2480</td> <td>-13.85</td> <td>0.86</td> <td>9.98</td> <td>-3.01</td> <td>0.50</td> <td>1.68</td> <td>-1.33</td> <td>0.74</td> </tr> </tbody> </table> <p>[After correction]</p> <table border="1"> <thead> <tr> <th rowspan="2">Freq. [MHz]</th> <th rowspan="2">Reading [dBm]</th> <th rowspan="2">Cable Loss [dB]</th> <th rowspan="2">Atten. Loss [dB]</th> <th colspan="2">Result (Time average)</th> <th rowspan="2">Duty factor [dB]</th> <th colspan="2">Result (Burst power average)</th> </tr> <tr> <th>[dBm]</th> <th>[mW]</th> <th>[dBm]</th> <th>[mW]</th> </tr> </thead> <tbody> <tr> <td>2402</td> <td>-13.86</td> <td>0.86</td> <td>9.98</td> <td>-3.02</td> <td>0.50</td> <td>1.69</td> <td>-1.33</td> <td>0.74</td> </tr> <tr> <td>2440</td> <td>-13.88</td> <td>0.86</td> <td>9.98</td> <td>-3.04</td> <td>0.50</td> <td>1.69</td> <td>-1.35</td> <td>0.73</td> </tr> <tr> <td>2480</td> <td>-13.85</td> <td>0.86</td> <td>9.98</td> <td>-3.01</td> <td>0.50</td> <td>1.69</td> <td>-1.32</td> <td>0.74</td> </tr> </tbody> </table> <p>Page 27 Deletion of blank fields in the Test Instruments.</p>	Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)		Duty factor [dB]	Result (Burst power average)		[dBm]	[mW]	[dBm]	[mW]	2402	-13.86	0.86	9.98	-3.02	0.50	1.68	-1.34	0.73	2440	-13.88	0.86	9.98	-3.04	0.50	1.68	-1.36	0.73	2480	-13.85	0.86	9.98	-3.01	0.50	1.68	-1.33	0.74	Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)		Duty factor [dB]	Result (Burst power average)		[dBm]	[mW]	[dBm]	[mW]	2402	-13.86	0.86	9.98	-3.02	0.50	1.69	-1.33	0.74	2440	-13.88	0.86	9.98	-3.04	0.50	1.69	-1.35	0.73	2480	-13.85	0.86	9.98	-3.01	0.50	1.69	-1.32	0.74
Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]					Result (Time average)			Duty factor [dB]	Result (Burst power average)																																																																							
				[dBm]	[mW]	[dBm]	[mW]																																																																												
2402	-13.86	0.86	9.98	-3.02	0.50	1.68	-1.34	0.73																																																																											
2440	-13.88	0.86	9.98	-3.04	0.50	1.68	-1.36	0.73																																																																											
2480	-13.85	0.86	9.98	-3.01	0.50	1.68	-1.33	0.74																																																																											
Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)		Duty factor [dB]	Result (Burst power average)																																																																												
				[dBm]	[mW]		[dBm]	[mW]																																																																											
2402	-13.86	0.86	9.98	-3.02	0.50	1.69	-1.33	0.74																																																																											
2440	-13.88	0.86	9.98	-3.04	0.50	1.69	-1.35	0.73																																																																											
2480	-13.85	0.86	9.98	-3.01	0.50	1.69	-1.32	0.74																																																																											

Reference: Abbreviations (Including words undescribed in this report)

A2LA	The American Association for Laboratory Accreditation	ICES	Interference-Causing Equipment Standard
AC	Alternating Current	IEC	International Electrotechnical Commission
AFH	Adaptive Frequency Hopping	IEEE	Institute of Electrical and Electronics Engineers
AM	Amplitude Modulation	IF	Intermediate Frequency
Amp, AMP	Amplifier	ILAC	International Laboratory Accreditation Conference
ANSI	American National Standards Institute	ISED	Innovation, Science and Economic Development Canada
Ant, ANT	Antenna	ISO	International Organization for Standardization
AP	Access Point	JAB	Japan Accreditation Board
ASK	Amplitude Shift Keying	LAN	Local Area Network
Atten., ATT	Attenuator	LIMS	Laboratory Information Management System
AV	Average	MCS	Modulation and Coding Scheme
BPSK	Binary Phase-Shift Keying	MRA	Mutual Recognition Arrangement
BR	Bluetooth Basic Rate	N/A	Not Applicable
BT	Bluetooth	NIST	National Institute of Standards and Technology
BT LE	Bluetooth Low Energy	NS	No signal detect.
BW	BandWidth	NSA	Normalized Site Attenuation
Cal Int	Calibration Interval	NVLAP	National Voluntary Laboratory Accreditation Program
CCK	Complementary Code Keying	OBW	Occupied Band Width
Ch., CH	Channel	OFDM	Orthogonal Frequency Division Multiplexing
CISPR	Comite International Special des Perturbations Radioelectriques	P/M	Power meter
CW	Continuous Wave	PCB	Printed Circuit Board
DBPSK	Differential BPSK	PER	Packet Error Rate
DC	Direct Current	PHY	Physical Layer
D-factor	Distance factor	PK	Peak
DFS	Dynamic Frequency Selection	PN	Pseudo random Noise
DQPSK	Differential QPSK	PRBS	Pseudo-Random Bit Sequence
DSSS	Direct Sequence Spread Spectrum	PSD	Power Spectral Density
EDR	Enhanced Data Rate	QAM	Quadrature Amplitude Modulation
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	QP	Quasi-Peak
EMC	ElectroMagnetic Compatibility	QPSK	Quadri-Phase Shift Keying
EMI	ElectroMagnetic Interference	RBW	Resolution Band Width
EN	European Norm	RDS	Radio Data System
ERP, e.r.p.	Effective Radiated Power	RE	Radio Equipment
EU	European Union	RF	Radio Frequency
EUT	Equipment Under Test	RMS	Root Mean Square
Fac.	Factor	RSS	Radio Standards Specifications
FCC	Federal Communications Commission	Rx	Receiving
FHSS	Frequency Hopping Spread Spectrum	SA, S/A	Spectrum Analyzer
FM	Frequency Modulation	SG	Signal Generator
Freq.	Frequency	SVSWR	Site-Voltage Standing Wave Ratio
FSK	Frequency Shift Keying	TR	Test Receiver
GFSK	Gaussian Frequency-Shift Keying	Tx	Transmitting
GNSS	Global Navigation Satellite System	VBW	Video BandWidth
GPS	Global Positioning System	Vert.	Vertical
Hori.	Horizontal	WLAN	Wireless LAN

CONTENTS	PAGE
SECTION 1: Customer Information	5
SECTION 2: Equipment Under Test (EUT).....	5
SECTION 3: Test Specification, Procedures & Results	6
SECTION 4: Operation of EUT during testing.....	8
SECTION 5: Radiated Spurious Emission	10
SECTION 6: Antenna Terminal Conducted Tests.....	12
APPENDIX 1: Test Data	13
99 % Occupied Bandwidth and 6 dB Bandwidth	13
Maximum Peak Output Power.....	15
Average Output Power.....	16
Radiated Spurious Emission	18
Conducted Spurious Emission	24
Power Density	25
APPENDIX 2: Test Instruments.....	27
APPENDIX 3: Photographs of Test Setup.....	29
Radiated Spurious Emission	29
Pre-check of Worst Case Position.....	30
Antenna Terminal Conducted Tests.....	31

SECTION 1: Customer Information

Company Name	CASIO COMPUTER CO., LTD.
Address	2-1, Sakaecho 3 chome, Hamura-shi, Tokyo 205-8555 Japan
Telephone Number	+81-42-579-7282
Contact Person	Shuji Yamashita

The information provided from the customer is as follows;

- Customer, Description of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
- Operating/Test Mode(s) (Mode(s)) on all the relevant pages
- SECTION 1: Customer Information
- SECTION 2: Equipment Under Test (EUT) other than the Receipt Date and Test Date
- SECTION 4: Operation of EUT during testing

* The laboratory is exempted from liability of any test results affected from the above information in SECTION 2 and 4.

SECTION 2: Equipment Under Test (EUT)

2.1 Identification of EUT

Description	Watch
Model Number	OCW-T6000
Alternative Name	R053
Serial Number	Refer to 4.2.
Condition	Production prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification	No Modification by the test lab.
Receipt Date	December 26, 2022
Test Date	January 12 to 14, 2023

2.2 Product Description

General Specification

Rating	OCW-T6000 (Watch): Typical: DC 2.5 V, Min.: DC 1.9 V, Max.: DC 2.7 V CW5712 (Module): Typical: DC 2.5 V, Min.: DC 1.9 V, Max.: DC 2.7 V
Clock frequency (ies) in the system	32.768 kHz, 32 MHz

Radio Specification

Bluetooth (Low Energy)

Equipment Type	Transceiver
Frequency of Operation	2402 MHz to 2480 MHz
Type of Modulation	GFSK
Antenna Gain	-2.0 dBi

SECTION 3: Test Specification, Procedures & Results

3.1 Test Specification

Test Specification	FCC Part 15 Subpart C The latest version on the first day of the testing period
Title	FCC 47 CFR Part 15 Radio Frequency Device Subpart C Intentional Radiators Section 15.207 Conducted limits Section 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

* Also the EUT complies with FCC Part 15 Subpart B.

3.2 Procedures and Results

Item	Test Procedure	Specification	Worst Margin	Results	Remarks
Conducted Emission	FCC: ANSI C63.10-2013 6. Standard test methods ISED: RSS-Gen 8.8	FCC: Section 15.207 ----- ISED: RSS-Gen 8.8	N/A	N/A	*1)
6dB Bandwidth	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section 15.247(a)(2) ----- ISED: RSS-247 5.2(a)	See data.	Complied a)	Conducted
Maximum Peak Output Power	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: RSS-Gen 6.12	FCC: Section 15.247(b)(3) ----- ISED: RSS-247 5.4(d)		Complied b)	Conducted
Power Density	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section 15.247(e) ----- ISED: RSS-247 5.2(b)		Complied c)	Conducted
Spurious Emission Restricted Band Edges	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: RSS-Gen 6.13	FCC: Section 15.247(d) ----- ISED: RSS-247 5.5 RSS-Gen 8.9 RSS-Gen 8.10	8.7 dB 2390.000 MHz, AV, Vert. Mode: Tx BT LE 2402 MHz 2483.500 MHz, AV, Vert. Mode: Tx BT LE 2480 MHz	Complied d), e)	Conducted (below 30 MHz)/ Radiated (above 30 MHz) *2)
<p>Note: UL Japan, Inc.'s EMI Work Procedures: Work Instructions-ULID-003591 and Work Instructions-ULID-003593. * In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred. *1) The test is not applicable since the EUT does not have AC mains. *2) Radiated test was selected over 30 MHz based on section 15.247(d) and KDB 558074 D01 15.247 Meas Guidance v05r02 8.5 and 8.6.</p>					
<p>a) Refer to APPENDIX 1 (data of 99 % Occupied Bandwidth and 6 dB Bandwidth) b) Refer to APPENDIX 1 (data of Maximum Peak Output Power) c) Refer to APPENDIX 1 (data of Power Density) d) Refer to APPENDIX 1 (data of Conducted Spurious Emission) e) Refer to APPENDIX 1 (data of Radiated Spurious Emission)</p>					

FCC Part 15.31 (e)

The EUT provides stable voltage constantly to the RF part regardless of input voltage. Instead of a new battery, DC power supply was used for the test. That does not affect the test result, therefore the EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the requirement.

3.3 Addition to Standard

Item	Test Procedure	Specification	Worst Margin	Results	Remarks
99 % Occupied Bandwidth	ISED: RSS-Gen 6.7	ISED: -	N/A	Complied a)	Conducted
a) Refer to APPENDIX 1 (data of 99 % Occupied Bandwidth and 6 dB Bandwidth)					

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

Measurement uncertainty is not taken into account when stating conformity with a specified requirement.

Note: When margins obtained from test results are less than the measurement uncertainty, the test results may exceed the limit.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k = 2$.

Item	Frequency range	Uncertainty (+/-)
Conducted emission (AC Mains) LISN	150 kHz-30 MHz	3.1 dB
Radiated emission (Measurement distance: 3 m)	9 kHz-30 MHz	3.3 dB
	30 MHz-200 MHz	4.8 dB
	200 MHz-1 GHz	6.1 dB
	1 GHz-6 GHz	4.7 dB
	6 GHz-18 GHz	5.3 dB
	18 GHz-40 GHz	5.5 dB
Radiated emission (Measurement distance: 1 m)	1 GHz-18 GHz	5.6 dB
	18 GHz-40 GHz	5.8 dB

Antenna terminal test	Uncertainty (+/-)
Duty cycle and Time Measurement	0.27 %

3.5 Test Location

UL Japan, Inc. Shonan EMC Lab.

1-22-3, Megumigaoka, Hiratsuka-shi, Kanagawa-ken 259-1220 Japan

Telephone: +81-463-50-6400

A2LA Certificate Number: 1266.03

(FCC test firm registration number: 626366, ISED lab company number: 2973D / CAB identifier: JP0001)

Test site	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Maximum measurement distance
No.1 Semi-anechoic chamber	2973D-1	20.6 x 11.3 x 7.65	20.6 x 11.3	10 m
No.2 Semi-anechoic chamber	2973D-2	20.6 x 11.3 x 7.65	20.6 x 11.3	10 m
No.3 Semi-anechoic chamber	2973D-3	12.7 x 7.7 x 5.35	12.7 x 7.7	5 m
No.4 Semi-anechoic chamber	-	8.1 x 5.1 x 3.55	8.1 x 5.1	-
No.1 Shielded room	-	6.8 x 4.1 x 2.7	6.8 x 4.1	-
No.2 Shielded room	-	6.8 x 4.1 x 2.7	6.8 x 4.1	-
No.3 Shielded room	-	6.3 x 4.7 x 2.7	6.3 x 4.7	-
No.4 Shielded room	-	4.4 x 4.7 x 2.7	4.4 x 4.7	-
No.5 Shielded room	-	7.8 x 6.4 x 2.7	7.8 x 6.4	-
No.6 Shielded room	-	7.8 x 6.4 x 2.7	7.8 x 6.4	-
No.8 Shielded room	-	3.45 x 5.5 x 2.4	3.45 x 5.5	-
No.1 Measurement room	-	2.55 x 4.1 x 2.5	-	-

3.6 Test Data, Test Instruments, and Test Set Up

Refer to APPENDIX.

SECTION 4: Operation of EUT during testing


4.1 Operating Mode(s)

Mode	Remarks*
Bluetooth Low Energy (BLE) 1M-PHY Uncoded PHY (1M-PHY)	Maximum Packet Size, PRBS9
<p>*Power of the EUT was set by the software as follows; Power Setting: Fixed Software: BLE RF Test Version 9.9 (Date: 2023.01.11, Storage location: EUT memory)</p> <p>*This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.</p>	

*The Details of Operating Mode(s)

Test Item	Operating Mode	Tested frequency
Radiated Spurious Emission (Below 1 GHz), Conducted Spurious Emission	Tx BT LE, 1 M-PHY *1)	2402 MHz
Radiated Spurious Emission (Above 1 GHz), Maximum Peak Output Power, Power Density, 6 dB Bandwidth, 99 % Occupied Bandwidth,	Tx BT LE, 1 M-PHY	2402 MHz 2440 MHz 2480 MHz
<p>*1) Conducted emissions and Spurious emissions for frequencies below 1 GHz were limited to the channel that had the highest peak power during the antenna terminal test, as preliminary testing indicated that changing the operating frequency had no significant impact on the emissions in those frequency bands.</p>		

4.2 Configuration and Peripherals

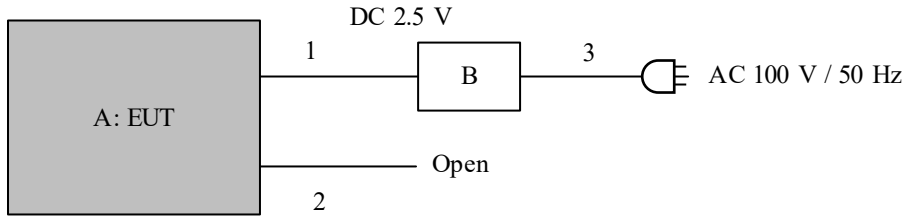

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support Equipment

No.	Item	Model number	Serial Number	Manufacturer	Remarks
A	Watch	OCW-T6000	62 *1) 93 *2)	CASIO COMPUTER	EUT
B	Power Supply (DC)	PW16-5ADP	19100034	GW Instek	*1)
		PAN60-10A	NL0023283	KIKUSUI	*2)

List of Cables Used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	DC	0.1 + 2.0 + 0.5	Unshielded	Unshielded	*3)
2	Signal	0.1	Unshielded	Unshielded	*4)
3	AC	2.0	Unshielded	Unshielded	-

*1) Used for Antenna Terminal conducted test.

*2) Used for Radiated Emission test.

*3) Cable for test operation.

*4) Cable for system reset during the development, not used for the product.

SECTION 5: Radiated Spurious Emission

Test Procedure

It was measured based on "8.5 and 8.6 of KDB 558074 D01 15.247 Meas Guidance v05r02".

[For below 1 GHz]

EUT was placed on a urethane platform of nominal size, 1.0 m by 1.5 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane. Test antenna was aimed at the EUT for receiving the maximum signal and always kept within the illumination area of the 3 dB beamwidth of the antenna.

The height of the measuring antenna varied between 1 m and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

Test Antennas are used as below;

Frequency	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Biconical	Logperiodic	Horn


In any 100 kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

20 dBc was applied to the frequency over the limit of FCC 15.209 / Table 4 of RSS-Gen 8.9(ISED) and outside the restricted band of FCC15.205 / Table 6 of RSS-Gen 8.10 (ISED).

Frequency	Below 1 GHz	Above 1 GHz		20 dBc
Instrument Used	Test Receiver	Spectrum Analyzer		Spectrum Analyzer
Detector	QP	PK	AV	PK
IF Bandwidth	BW 120 kHz	RBW: 1 MHz VBW: 3 MHz	<u>11.12.2.5.2</u> RBW: 1 MHz VBW: 3 MHz Detector: Power Averaging (Linear voltage) Trace: 100 traces Duty factor was added to the results.	RBW: 100 kHz VBW: 300 kHz


Figure 2: Test Setup

Below 1 GHz

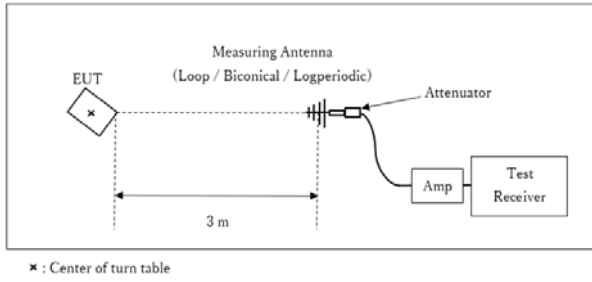

Test Distance: 3 m


1 GHz to 10 GHz

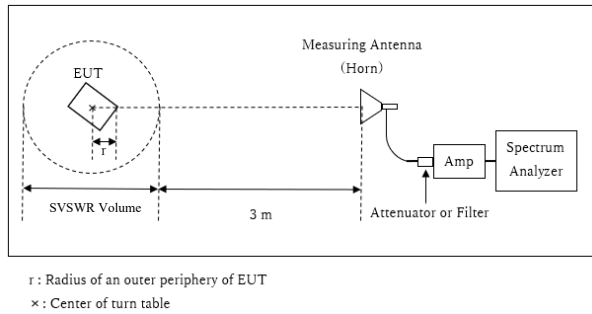

Distance Factor: $20 \times \log(3.97 \text{ m} / 3.0 \text{ m}) = 2.44 \text{ dB}$
* Test Distance: $(3 + \text{SVSWR Volume} / 2) - r = 3.97 \text{ m}$

SVSWR Volume : 2.0 m
(SVSWR Volume has been calibrated based on CISPR 16-1-4.)
 $r = 0.03 \text{ m}$

10 GHz to 26.5 GHz

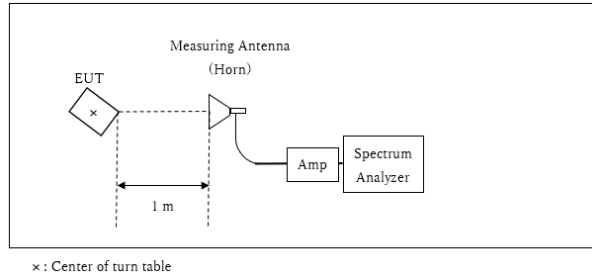

Distance Factor: $20 \times \log(1.0 \text{ m} / 3.0 \text{ m}) = -9.54 \text{ dB}$
*Test Distance: 1 m

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

Antenna polarization	Carrier	Spurious (30 MHz - 1 GHz)	Spurious (1 GHz - 2.8 GHz)	Spurious (2.8 GHz - 10 GHz)	Spurious (10 GHz - 18 GHz)	Spurious (18 GHz - 26.5 GHz)
Horizontal	X	X	X	X	X	X
Vertical	Z	X	Z	X	X	X

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Measurement Range : 30 MHz to 26.5 GHz
Test Data : APPENDIX
Test Result : Pass

SECTION 6: Antenna Terminal Conducted Tests

Test Procedure

The tests were made with below setting connected to the antenna port.

Test	Span	RBW	VBW	Sweep time	Detector	Trace	Instrument Used
6 dB Bandwidth	3 MHz	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
99 % Occupied Bandwidth *1)	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer
Maximum Peak Output Power	-	-	-	Auto	Peak/ Average *2)	-	Power Meter (Sensor: 160 MHz BW)
Peak Power Density	1.5 times the 6dB Bandwidth	3 kHz	9.1 kHz	Auto	Peak	Max Hold	Spectrum Analyzer *3)
Conducted Spurious Emission *4) *5)	9 kHz to 150 kHz	200 Hz	620 Hz	Auto	Peak	Max Hold	Spectrum Analyzer
	150 kHz to 30 MHz	10 kHz	30 kHz				

*1) Peak hold was applied as Worst-case measurement.

*2) Reference data

*3) Section 11.10.2 Method PKPSD (peak PSD) of "ANSI C63.10-2013".

*4) In the frequency range below 30MHz, RBW was narrowed to separate the noise contents.

Then, wide-band noise near the limit was checked separately, however the noise was low enough as shown in the chart.

(9 kHz - 150 kHz: RBW = 200 Hz, 150 kHz - 30 MHz: RBW = 9.1 kHz).

*5) The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377 Ohms. For example, the measurement at frequency 9 kHz resulted in a level of 45.5 dBuV/m, which is equivalent to $45.5 - 51.5 = -6.0$ dBuA/m, which has the same margin, 3 dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

The test results and limit are rounded off to two decimals place, so some differences might be observed.

The equipment and cables were not used for factor 0 dB of the data sheets.

Test Data : APPENDIX
Test Result : Pass

APPENDIX 1: Test Data

99 % Occupied Bandwidth and 6 dB Bandwidth


Test place Shonan EMC Lab. No.1 Measurement Room
Date January 12, 2023
Temperature / Humidity 23 deg. C / 43 % RH
Engineer Yohsuke Matsuzawa
Mode Tx BT LE

BT LE 1 M-PHY

Frequency [MHz]	99 % Occupied Bandwidth [kHz]	6 dB Bandwidth [MHz]	Limit for 6 dB Bandwidth [MHz]
2402	1053.2	0.677	> 0.5000
2440	1058.8	0.688	> 0.5000
2480	1056.0	0.684	> 0.5000

99 % Occupied Bandwidth and 6 dB Bandwidth

BT LE, 1 M-PHY

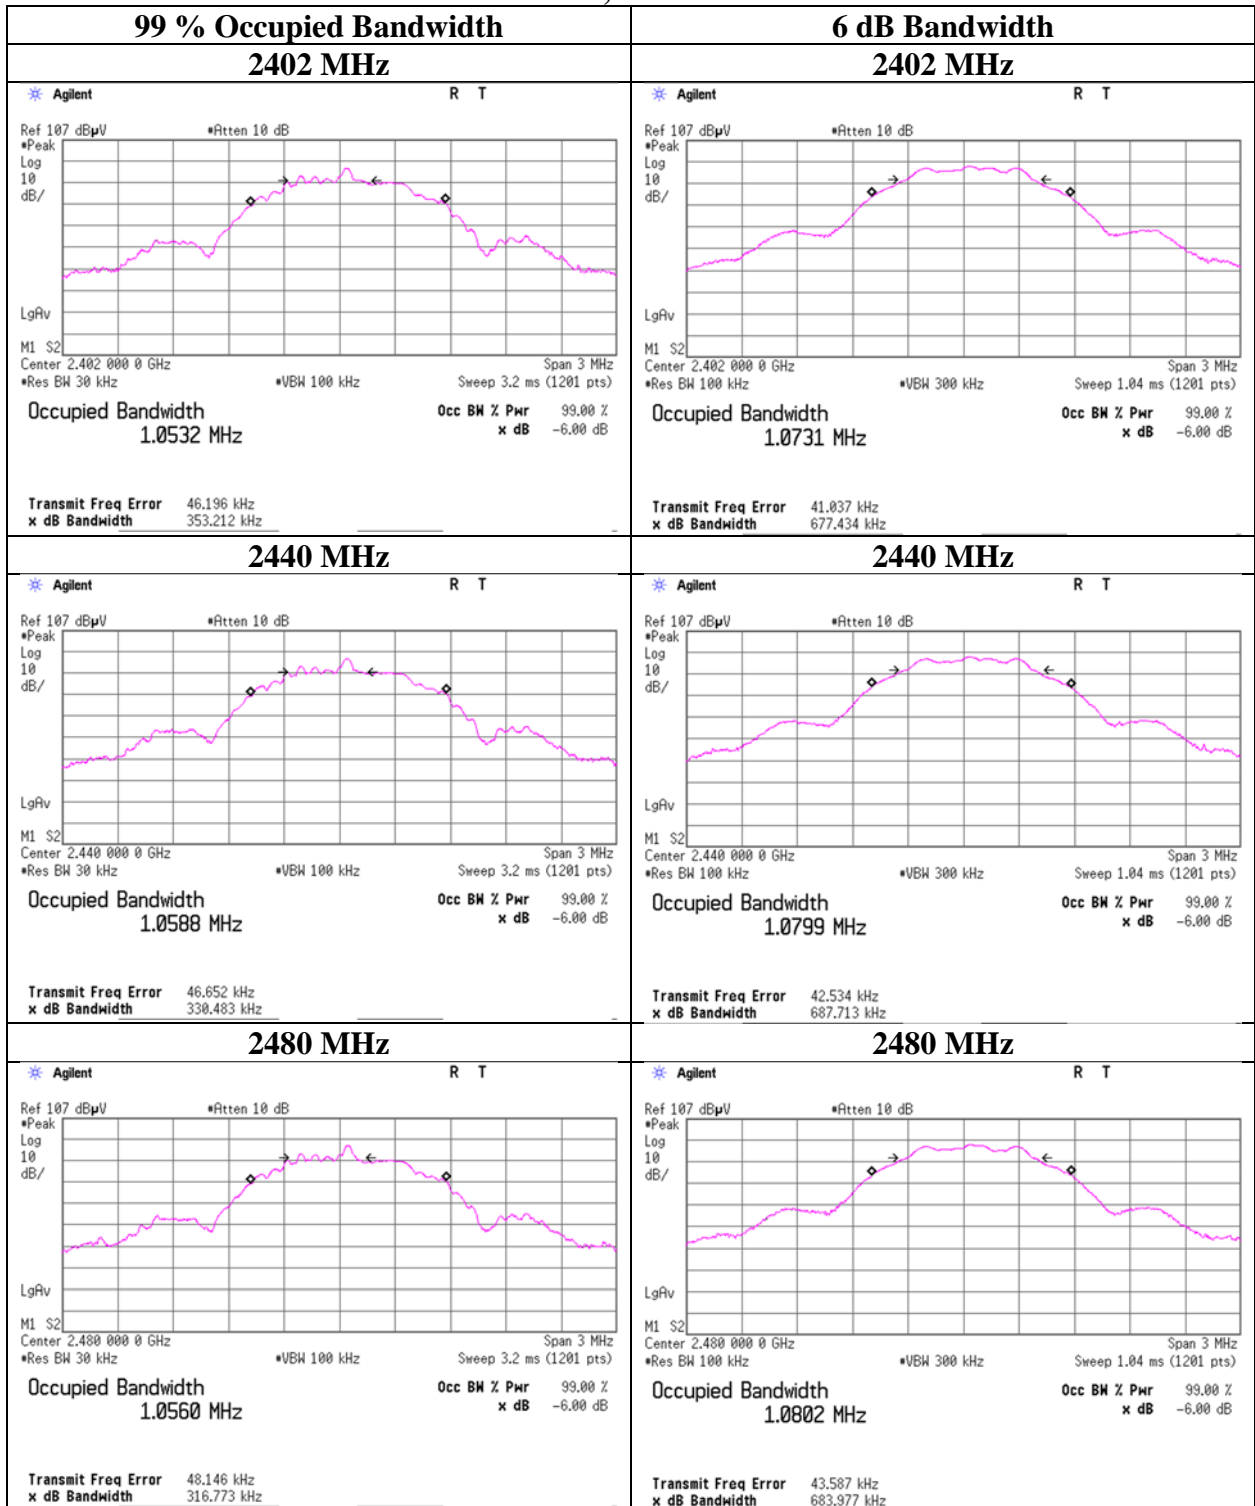

Maximum Peak Output Power

Test place	Shonan EMC Lab. No.1 Measurement Room
Date	January 12, 2023
Temperature / Humidity	23 deg. C / 43 % RH
Engineer	Yohsuke Matsuzawa
Mode	Tx BT LE

BT LE 1 M-PHY

Maximum peak output power

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Conducted Power					e.i.r.p. for RSS-247					
				Result		Limit		Margin	Antenna Gain [dBi]	Result		Limit		Margin
				[dBm]	[mW]	[dBm]	[mW]	[dB]		[dBm]	[mW]	[dBm]	[mW]	
2402	-11.52	0.86	9.98	-0.68	0.86	30.00	1000	30.68	-2.00	-2.68	0.54	36.02	4000	38.70
2440	-11.55	0.86	9.98	-0.71	0.85	30.00	1000	30.71	-2.00	-2.71	0.54	36.02	4000	38.73
2480	-11.53	0.86	9.98	-0.69	0.85	30.00	1000	30.69	-2.00	-2.69	0.54	36.02	4000	38.71

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Average Output Power
(Reference data for RF Exposure)

Test place Shonan EMC Lab. No.1 Measurement Room
Date January 12, 2023
Temperature / Humidity 23 deg. C / 43 % RH
Engineer Yohsuke Matsuzawa
Mode Tx BT LE

BT LE 1 M-PHY

Average power

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)		Duty factor [dB]	Result (Burst power average)	
				[dBm]	[mW]		[dBm]	[mW]
2402	-13.86	0.86	9.98	-3.02	0.50	1.69	-1.33	0.74
2440	-13.88	0.86	9.98	-3.04	0.50	1.69	-1.35	0.73
2480	-13.85	0.86	9.98	-3.01	0.50	1.69	-1.32	0.74

Sample Calculation:


Result (Time average) = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

Result (Burst power average) = Result (Time average) + Duty factor

Burst rate confirmation

Test place	Shonan EMC Lab. No.1 Measurement Room
Date	January 12, 2023
Temperature / Humidity	23 deg. C / 43 % RH
Engineer	Yohsuke Matsuzawa
Mode	Tx BT LE

BT LE 1 M-PHY (for Average power) *1) BT LE 1 M-PHY (for Radiated emission) *2)

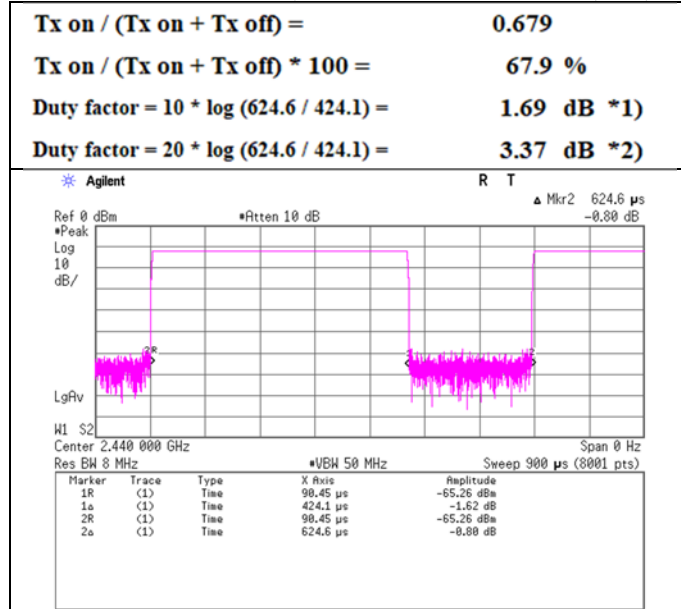

* Since the burst rate is not different between the channels, the data has been obtained on the representative channel.

Radiated Spurious Emission

Test place	Shonan EMC Lab.		
Semi Anechoic Chamber	No.1	No.1	No.1
Date	January 14, 2023	January 13, 2023	January 14, 2023
Temperature / Humidity	19 deg. C / 34 % RH	20 deg. C / 24 % RH	23 deg. C / 32 % RH
Engineer	Yusuke Tanikawara	Hiromasa Sato	Takahiro Suzuki
Mode	(30 MHz - 1 GHz)	(1 GHz - 10 GHz)	(10 GHz - 26.5 GHz)
	Tx BT LE 2402 MHz		

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	32.233	QP	22.10	17.74	7.08	31.84	0.00	15.08	40.0	24.9	100	0	-
Hori.	47.510	QP	22.80	12.15	7.43	31.83	0.00	10.55	40.0	29.4	100	0	-
Hori.	165.559	QP	21.40	15.52	8.99	31.78	0.00	14.13	43.5	29.3	100	0	-
Hori.	858.486	QP	21.00	21.87	9.77	31.60	0.00	21.04	46.0	24.9	100	0	-
Hori.	2390.000	PK	46.16	27.85	14.86	39.62	2.44	51.69	73.9	22.2	148	93	-
Hori.	4804.000	PK	48.01	31.17	7.87	39.73	2.44	49.76	73.9	24.1	153	169	-
Hori.	7206.000	PK	46.20	36.88	9.51	39.52	2.44	55.51	73.9	18.3	150	0	floor noise
Hori.	9608.000	PK	44.27	38.11	11.08	39.73	2.44	56.17	73.9	17.7	150	0	floor noise
Hori.	7206.000	AV	35.27	36.88	9.51	39.52	2.44	44.58	53.9	9.3	150	0	floor noise
Hori.	9608.000	AV	35.33	38.11	11.08	39.73	2.44	47.23	53.9	6.6	150	0	floor noise
Vert.	30.681	QP	21.40	18.41	7.04	31.84	0.00	15.01	40.0	24.9	100	0	-
Vert.	125.416	QP	21.50	13.63	8.30	31.80	0.00	11.63	43.5	31.8	100	0	-
Vert.	196.176	QP	21.40	16.62	9.05	31.77	0.00	15.30	43.5	28.2	100	0	-
Vert.	601.096	QP	21.10	19.43	8.42	32.00	0.00	16.95	46.0	29.0	100	0	-
Vert.	910.324	QP	20.60	22.14	10.02	31.27	0.00	21.49	46.0	24.5	100	0	-
Vert.	995.105	QP	20.20	22.55	10.41	30.57	0.00	22.59	53.9	31.3	100	0	-
Vert.	2390.000	PK	45.87	27.85	14.86	39.62	2.44	51.40	73.9	22.5	260	132	-
Vert.	4804.000	PK	47.84	31.17	7.87	39.73	2.44	49.59	73.9	24.3	162	336	-
Vert.	7206.000	PK	44.93	36.88	9.51	39.52	2.44	54.24	73.9	19.6	150	0	floor noise
Vert.	9608.000	PK	44.23	38.11	11.08	39.73	2.44	56.13	73.9	17.7	150	0	floor noise
Vert.	7206.000	AV	35.13	36.88	9.51	39.52	2.44	44.44	53.9	9.4	150	0	floor noise
Vert.	9608.000	AV	35.45	38.11	11.08	39.73	2.44	47.35	53.9	6.5	150	0	floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.97\text{ m} / 3.0\text{ m}) = 2.44\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Average measurement value with duty factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2390.000	AV	35.68	27.85	14.86	39.62	3.37	2.44	44.58	53.9	9.3	*1)
Hori.	4804.000	AV	36.71	31.17	7.87	39.73	3.37	2.44	41.83	53.9	12.0	-
Vert.	2390.000	AV	36.22	27.85	14.86	39.62	3.37	2.44	45.12	53.9	8.7	*1)
Vert.	4804.000	AV	36.63	31.17	7.87	39.73	3.37	2.44	41.75	53.9	12.1	-

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Duty factor + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.97\text{ m} / 3.0\text{ m}) = 2.44\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Duty factor refer to "Burst rate confirmation" sheet.

*1) Not out of band emission (Leakage Power)

20 dBc Data Sheet (RBW 100 kHz, VBW 300 kHz)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2402.000	PK	74.51	27.83	14.88	39.62	2.44	80.04	-	-	Carrier
Hori.	2400.000	PK	39.88	27.83	14.88	39.62	2.44	45.41	60.0	14.5	-
Vert.	2402.000	PK	74.71	27.83	14.88	39.62	2.44	80.24	-	-	Carrier
Vert.	2400.000	PK	40.70	27.83	14.88	39.62	2.44	46.23	60.2	13.9	-



Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.97\text{ m} / 3.0\text{ m}) = 2.44\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Radiated Spurious Emission
(Reference Plot for band-edge)

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	No.1
Date	January 13, 2023
Temperature / Humidity	20 deg. C / 24 % RH
Engineer	Hiromasa Sato
	(1 GHz – 10 GHz)
Mode	Tx BT LE 2402 MHz

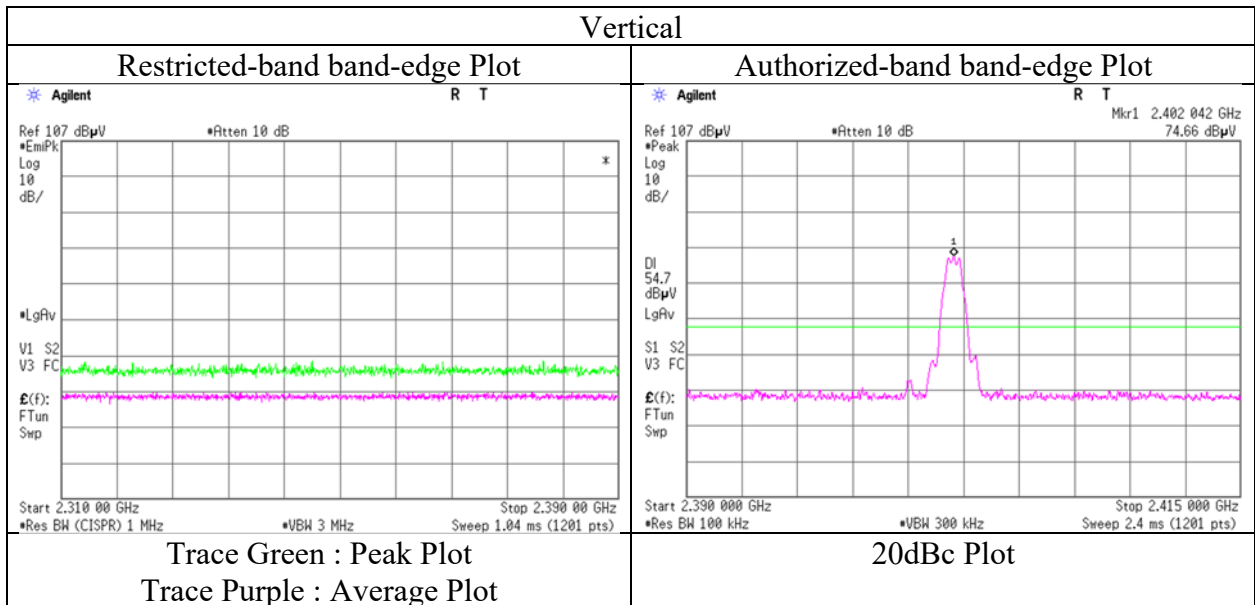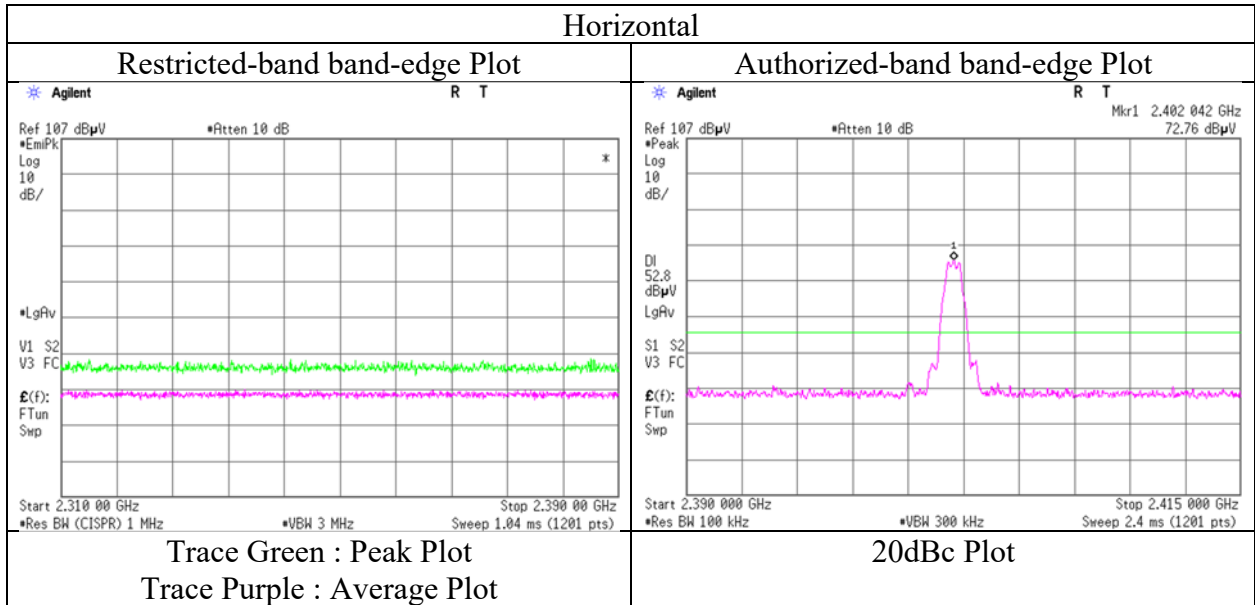

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Shonan EMC Lab.		
Semi Anechoic Chamber	No.1	No.1	No.1
Date	January 14, 2023	January 13, 2023	January 14, 2023
Temperature / Humidity	19 deg. C / 34 % RH	20 deg. C / 24 % RH	23 deg. C / 32 % RH
Engineer	Yusuke Tanikawara	Hiromasa Sato	Takahiro Suzuki
Mode	(30 MHz - 1 GHz)	(1 GHz - 10 GHz)	(10 GHz - 26.5 GHz)
	Tx BT LE 2440 MHz		

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	4880.000	PK	48.25	31.23	7.93	39.76	2.44	50.09	73.9	23.8	172	154	-
Hori.	7320.000	PK	45.99	36.92	9.61	39.48	2.44	55.48	73.9	18.4	150	0	floor noise
Hori.	9760.000	PK	44.36	38.55	11.10	39.67	2.44	56.78	73.9	17.1	150	0	floor noise
Hori.	7320.000	AV	35.10	36.92	9.61	39.48	2.44	44.59	53.9	9.3	150	0	floor noise
Hori.	9760.000	AV	35.40	38.55	11.10	39.67	2.44	47.82	53.9	6.0	150	0	floor noise
Vert.	4880.000	PK	45.72	31.23	7.93	39.76	2.44	47.56	73.9	26.3	176	355	-
Vert.	7320.000	PK	43.45	36.92	9.61	39.48	2.44	52.94	73.9	20.9	150	0	floor noise
Vert.	9760.000	PK	44.17	38.55	11.10	39.67	2.44	56.59	73.9	17.3	150	0	floor noise
Vert.	7320.000	AV	34.82	36.92	9.61	39.48	2.44	44.31	53.9	9.5	150	0	floor noise
Vert.	9760.000	AV	35.11	38.55	11.10	39.67	2.44	47.53	53.9	6.3	150	0	floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.97\text{ m} / 3.0\text{ m}) = 2.44\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Average measurement value with duty factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	4880.000	AV	37.06	31.23	7.93	39.76	3.37	2.44	42.27	53.9	11.6	-
Vert.	4880.000	AV	36.39	31.23	7.93	39.76	3.37	2.44	41.60	53.9	12.3	-

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Duty factor + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.97\text{ m} / 3.0\text{ m}) = 2.44\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Duty factor refer to "Burst rate confirmation" sheet.

Radiated Spurious Emission

Test place	Shonan EMC Lab.		
Semi Anechoic Chamber	No.1	No.1	No.1
Date	January 14, 2023	January 13, 2023	January 14, 2023
Temperature / Humidity	19 deg. C / 34 % RH	20 deg. C / 24 % RH	23 deg. C / 32 % RH
Engineer	Yusuke Tanikawara	Hiromasa Sato	Takahiro Suzuki
Mode	(30 MHz - 1 GHz) Tx BT LE 2480 MHz	(1 GHz - 10 GHz)	(10 GHz - 26.5 GHz)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant. Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	2483.500	PK	44.98	27.72	14.98	39.65	2.44	50.47	73.9	23.4	155	116	-
Hori.	4960.000	PK	46.62	31.40	7.99	39.79	2.44	48.66	73.9	25.2	163	174	-
Hori.	7440.000	PK	45.07	37.02	9.69	39.43	2.44	54.79	73.9	19.1	150	0	floor noise
Hori.	9920.000	PK	44.98	38.57	11.12	39.60	2.44	57.51	73.9	16.3	150	0	floor noise
Hori.	7440.000	AV	35.64	37.02	9.69	39.43	2.44	45.36	53.9	8.5	150	0	floor noise
Hori.	9920.000	AV	35.13	38.57	11.12	39.60	2.44	47.66	53.9	6.2	150	0	floor noise
Vert.	2483.500	PK	45.62	27.72	14.98	39.65	2.44	51.11	73.9	22.7	225	124	-
Vert.	4960.000	PK	45.96	31.40	7.99	39.79	2.44	48.00	73.9	25.9	175	348	-
Vert.	7440.000	PK	44.23	37.02	9.69	39.43	2.44	53.95	73.9	19.9	150	0	floor noise
Vert.	9920.000	PK	43.87	38.57	11.12	39.60	2.44	56.40	73.9	17.5	150	0	floor noise
Vert.	7440.000	AV	35.70	37.02	9.69	39.43	2.44	45.42	53.9	8.4	150	0	floor noise
Vert.	9920.000	AV	35.20	38.57	11.12	39.60	2.44	47.73	53.9	6.1	150	0	floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.97\text{ m} / 3.0\text{ m}) = 2.44\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Average measurement value with duty factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant. Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2483.500	AV	36.17	27.72	14.98	39.65	3.37	2.44	45.03	53.9	8.8	*1)
Hori.	4960.000	AV	37.17	31.40	7.99	39.79	3.37	2.44	42.58	53.9	11.3	-
Vert.	2483.500	AV	36.25	27.72	14.98	39.65	3.37	2.44	45.11	53.9	8.7	*1)
Vert.	4960.000	AV	36.49	31.40	7.99	39.79	3.37	2.44	41.90	53.9	12.0	-

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Duty factor + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.97\text{ m} / 3.0\text{ m}) = 2.44\text{ dB}$



10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Duty factor refer to "Burst rate confirmation" sheet.

*1) Not out of band emission (Leakage Power)

Radiated Spurious Emission
(Reference Plot for band-edge)


Test place Shonan EMC Lab.
Semi Anechoic Chamber No.1
Date January 13, 2023
Temperature / Humidity 20 deg. C / 24 % RH
Engineer Hiromasa Sato
 (1 GHz - 10 GHz)
Mode Tx BT LE 2480 MHz

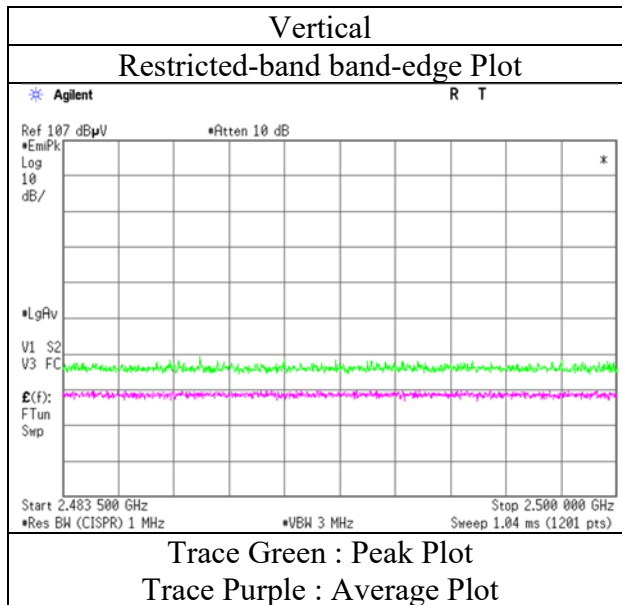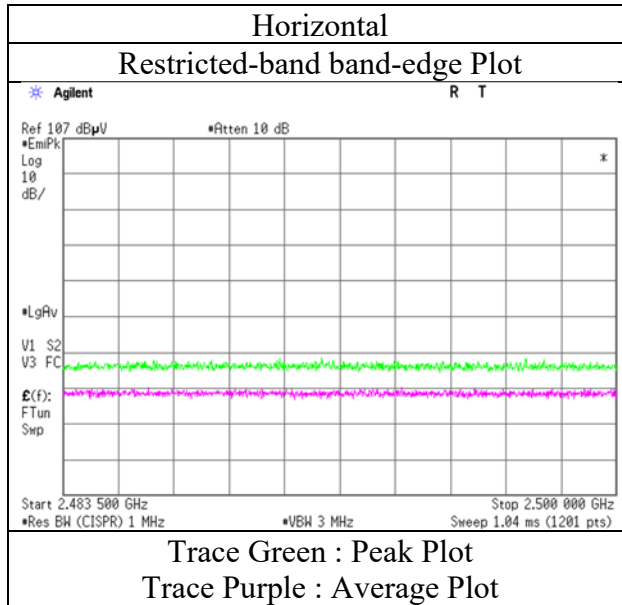

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission
(Plot data, Worst case mode for Maximum Peak Output Power)


Test place	Shonan EMC Lab.		
Semi Anechoic Chamber	No.1	No.1	No.1
Date	January 14, 2023	January 13, 2023	January 14, 2023
Temperature / Humidity	19 deg. C / 34 % RH	20 deg. C / 24 % RH	23 deg. C / 32 % RH
Engineer	Yusuke Tanikawara (30 MHz - 1 GHz)	Hiromasa Sato (1 GHz - 10 GHz)	Takahiro Suzuki (10 GHz - 26.5 GHz)
Mode	Tx BT LE 2402 MHz		

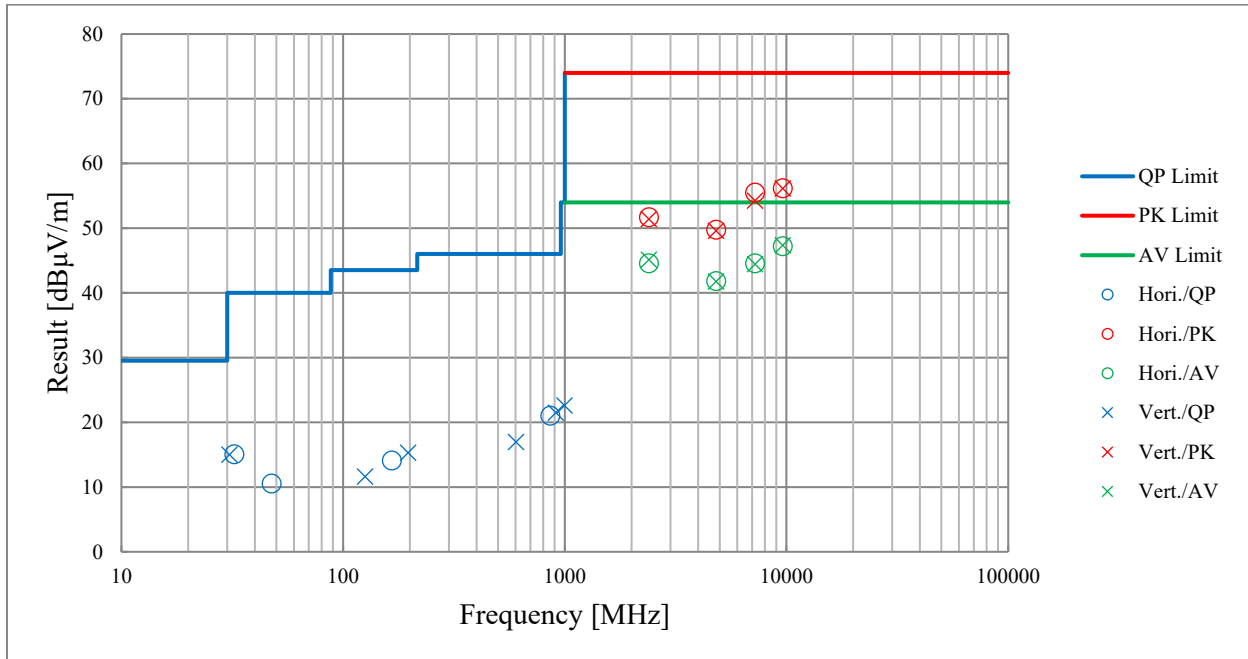

*These plots data contains sufficient number to show the trend of characteristic features for EUT.

Conducted Spurious Emission

Test place	Shonan EMC Lab. No.1 Measurement Room
Date	January 12, 2023
Temperature / Humidity	23 deg. C / 43 % RH
Engineer	Yohsuke Matsuzawa
Mode	Tx BT LE 1 M-PHY 2402 MHz

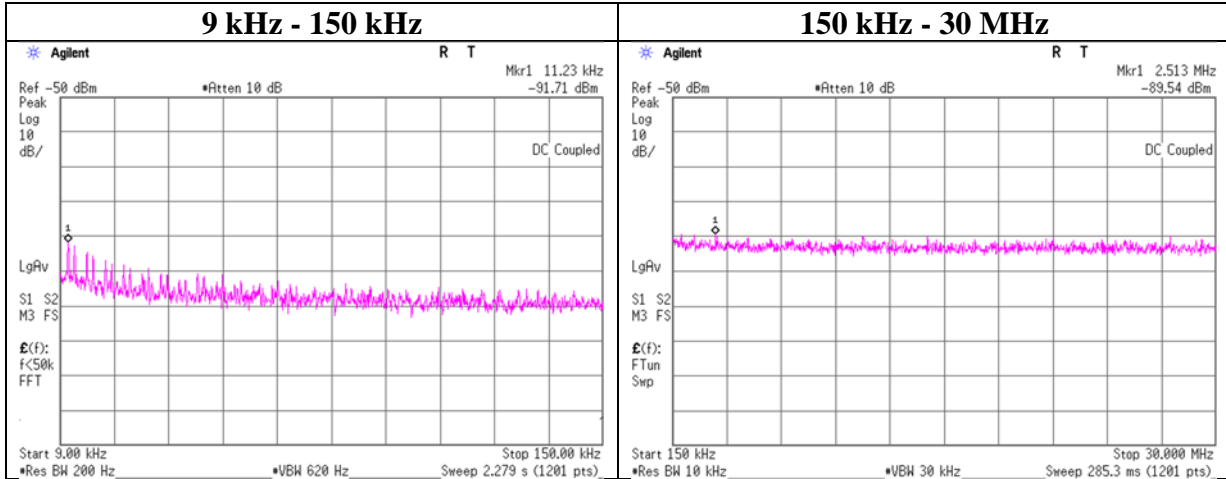

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator Loss [dB]	Antenna Gain * [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
11.23	-91.7	0.5	9.9	2.0	1.0	-79.3	300	6.0	-18.0	46.5	64.5	-
2513.00	-89.5	0.5	9.9	2.0	1.0	-77.1	30	6.0	4.1	29.5	25.4	-

$E \text{ [dBuV/m]} = \text{EIRP [dBm]} - 20 \log(\text{Distance [m]}) + \text{Ground bounce [dB]} + 104.8 \text{ [dBuV/m]}$

$\text{EIRP [dBm]} = \text{Reading [dBm]} + \text{Cable loss [dB]} + \text{Attenuator Loss [dB]} + \text{Antenna gain [dBi]} + 10 * \log(N)$

N: Number of output

*2.0 dBi was applied to the test result based on ANSI C63.10 since antenna gain was less than 2.0 dBi.

Power Density

Test place Shonan EMC Lab. No.1 Measurement Room
Date January 12, 2023
Temperature / Humidity 23 deg. C / 43 % RH
Engineer Yohsuke Matsuzawa
Mode Tx BT LE

BT LE 1 M-PHY


Frequency [MHz]	Measured Frequency [MHz]	Reading [dBm/3 kHz]	Cable Loss [dB]	Atten. Loss [dB]	Result [dBm/3 kHz]	Limit [dBm/3 kHz]	Margin [dB]
2402	2402.021	-26.22	0.86	9.98	-15.38	8.00	23.38
2440	2440.021	-26.36	0.86	9.98	-15.52	8.00	23.52
2480	2480.021	-27.02	0.86	9.98	-16.18	8.00	24.18

Sample Calculation:


Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

Power Density


BT LE, 1 M-PHY 2402 MHz

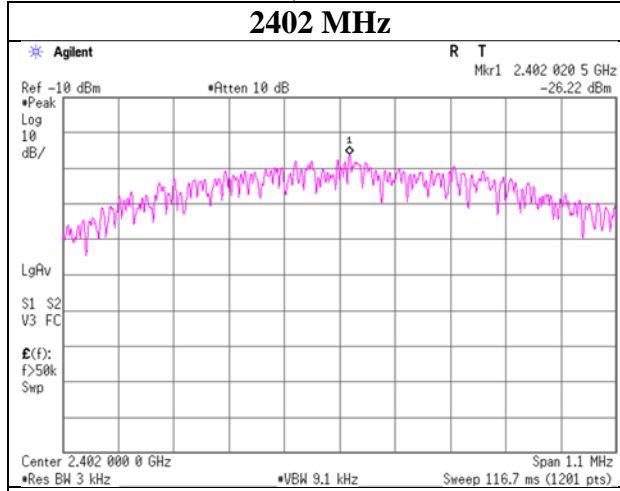

2440 MHz

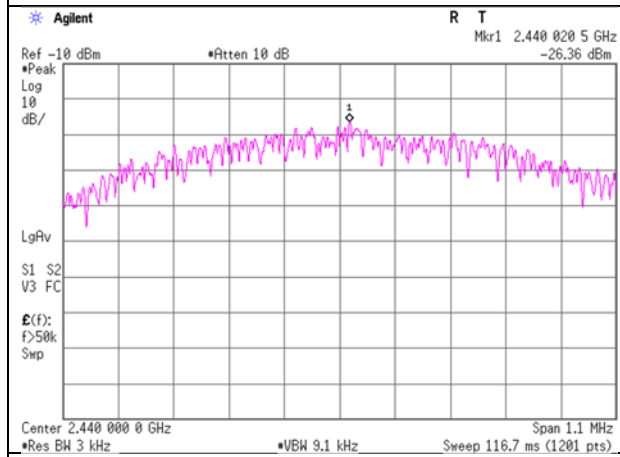

2480 MHz

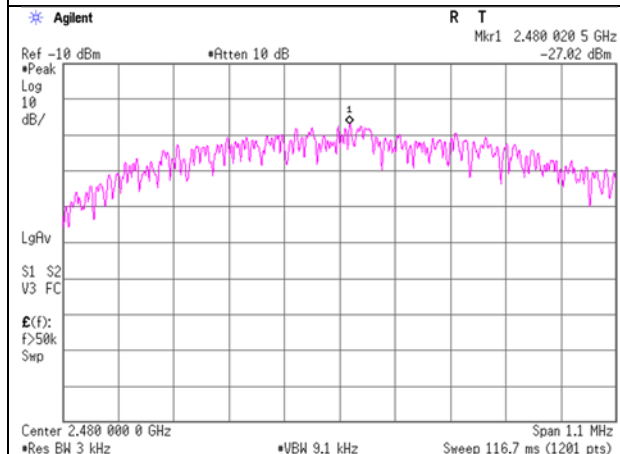

APPENDIX 2: Test Instruments

Test Equipment

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
AT	KTS-08	145095	Digital Tester	SANWA	PC500	7019224	2022/04/07	12
AT	SAT10-23	204927	Attenuator	Weinschel Corp.	54A-10	109972	2022/02/21	12
AT	SCC-G60	196941	Coaxial Cable	Huber+Suhner	SUCOFLEX 102	803093/2	2022/03/01	12
AT	SOS-28	191846	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	-	2022/08/08	12
AT	SPM-13	169910	Power Meter	Keysight Technologies Inc	8990B	MY51000448	2022/11/08	12
AT	SPSS-06	169911	Power sensor	Keysight Technologies Inc	N1923A	MY57270004	2022/11/08	12
AT	SRENT-09	150461	Spectrum Analyzer	Keysight Technologies Inc	E4440A	MY46186392	2022/03/14	12
RE	COTS-SEMI-5	170932	EMI Software	TSJ (Techno Science Japan)	TEPTO-DV3(RE,CE,ME,PE)	-	-	-
RE	KAT6-04	144899	Attenuator	Inmet	18N-6dB	-	2022/12/16	12
RE	KSA-08	145089	Spectrum Analyzer	Keysight Technologies Inc	E4446A	MY46180525	2022/11/01	12
RE	SAEC-01(NSA)	145597	Semi-Anechoic Chamber	TDK	SAEC-01(NSA)	1	2022/04/11	12
RE	SAEC-01(SVSWR)	145561	Semi-Anechoic Chamber	TDK	SAEC-01(SVSWR)	1	2022/05/13	12
RE	SAF-01	145003	Pre Amplifier	SONOMA	310N	290211	2022/02/24	12
RE	SAF-04	145127	Pre Amplifier	Toyo Corporation	TPA0118-36	2072554	2022/05/20	12
RE	SAF-08	145007	Pre Amplifier	Toyo Corporation	HAP18-26W	19	2022/03/03	12
RE	SAT10-05	145136	Attenuator	Keysight Technologies Inc	8493C-010	74864	2022/10/20	12
RE	SAT3-09	144959	Attenuator	JFW	50HF-003N	-	2022/08/23	12
RE	SBA-01	145161	Biconical Antenna	Schwarzbeck Mess-Elektronik OHG	BBA9106	91032664	2022/04/16	12
RE	SCC-A1/A3/A5/A7/A8/A13/SRSE-01	144967	Coaxial Cable&RF Selector	Fujikura/Fujikura/Suhner/Suhner/Suhner/Suhner/TOYO	8D2W/12DSFA/141PE/141PE/141PE/141PE/NS4906	-/0901-269(RF Selector)	2022/04/20	12
RE	SCC-A2/A4/A6/A7/A8/A13/SRSE-01	144968	Coaxial Cable&RF Selector	Fujikura/Fujikura/Suhner/Suhner/Suhner/Suhner/TOYO	8D2W/12DSFA/141PE/141PE/141PE/141PE/NS4906	-/0901-269(RF Selector)	2022/04/20	12
RE	SCC-G05	145039	Coaxial Cable	Junkosha	J12J102207-00	APR-30-15-037	2022/01/06	12
RE	SCC-G15	145176	Coaxial Cable	Suhner	SUCOFLEX 102	32703/2	2022/03/03	12
RE	SCC-G41	151617	Coaxial Cable	Junkosha	MWX221-01000NFSNMS/B	1612S006	2022/01/06	12
RE	SCC-G57	179540	Coaxial Cable	Huber+Suhner	SUCOFLEX 102	802815/2	2022/05/12	12
RE	SCC-G62	196985	Coaxial Cable	Huber+Suhner	SUCOFLEX 102	803650/2	2022/03/08	12
RE	SCC-G68	200008	Coaxial Cable	Huber+Suhner	SUCOFLEX 104	575616/4	2022/07/21	12

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
RE	SFL-02	145301	Highpass Filter	MICRO-TRONICS	HPM50111	51	2022/10/20	12
RE	SHA-01	145383	Horn Antenna	Schwarzbeck Mess-Elektronik OHG	BBHA9120D	9120D-725	2022/03/01	12
RE	SHA-04	145512	Horn Antenna	ETS-Lindgren	3160-09	00094868	2022/06/06	12
RE	SHA-08	194683	Horn Antenna	Schwarzbeck Mess-Elektronik OHG	BBHA 9120 C	694	2022/03/01	12
RE	SJM-22	207279	Measuring Tool, Tape Measure	ASKUL	-	-	-	-
RE	SLA-05	145527	Logperiodic Antenna	Schwarzbeck Mess-Elektronik OHG	VUSLP9111B	193	2022/04/16	12
RE	SOS-20	191837	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	-	2022/08/06	12
RE	STR-01	145790	Test Receiver	Rohde & Schwarz	ESU40	100093	2022/04/28	12
RE	STS-01	145792	Digital Hitester	HIOKI E.E. CORPORATION	3805-50	80997812	2022/09/20	12

*Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item: RE: Radiated Emission
AT: Antenna Terminal Conducted