



Appendix B


RF power output conducted



FCC part 15.247

Peak output power conducted

EUT	Bluetooth wireless stereo dongle
Model	Jabra A120s
Approval Holder	GN Mobile A/S
Temperature / Voltage	22°C / Unom: 3.7 V DC
Test Site / Operator	ETS / Mr. Handrik
Test Specification	FCC part 15 section 247(b)
Test Case	Peak output_power
Comment 1	Channel.: 0 / 2402 MHz
Comment 2	

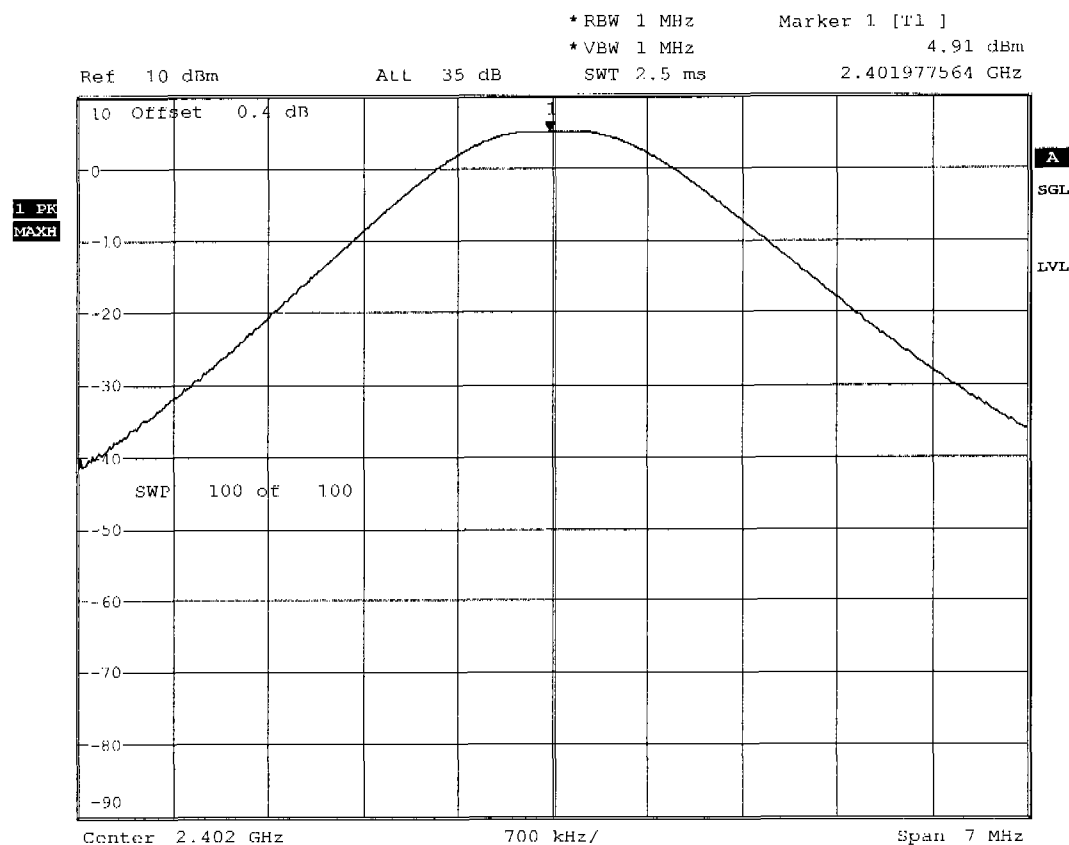


Date: 4.APR.2006 09:17:36

Measurement diagram



FCC part 15.247
Peak output power conducted

EUT	Bluetooth wireless stereo dongle
Model	Jabra A120s
Approval Holder	GN Mobile A/S
Temperature / Voltage	22°C / Unom: 3.7 V DC
Test Site / Operator	ETS / Mr. Handrik
Test Specification	FCC part 15 section 247(b)
Test Case	Peak output_power
Comment 1	Channel.: 39 / 2441 MHz
Comment 2	

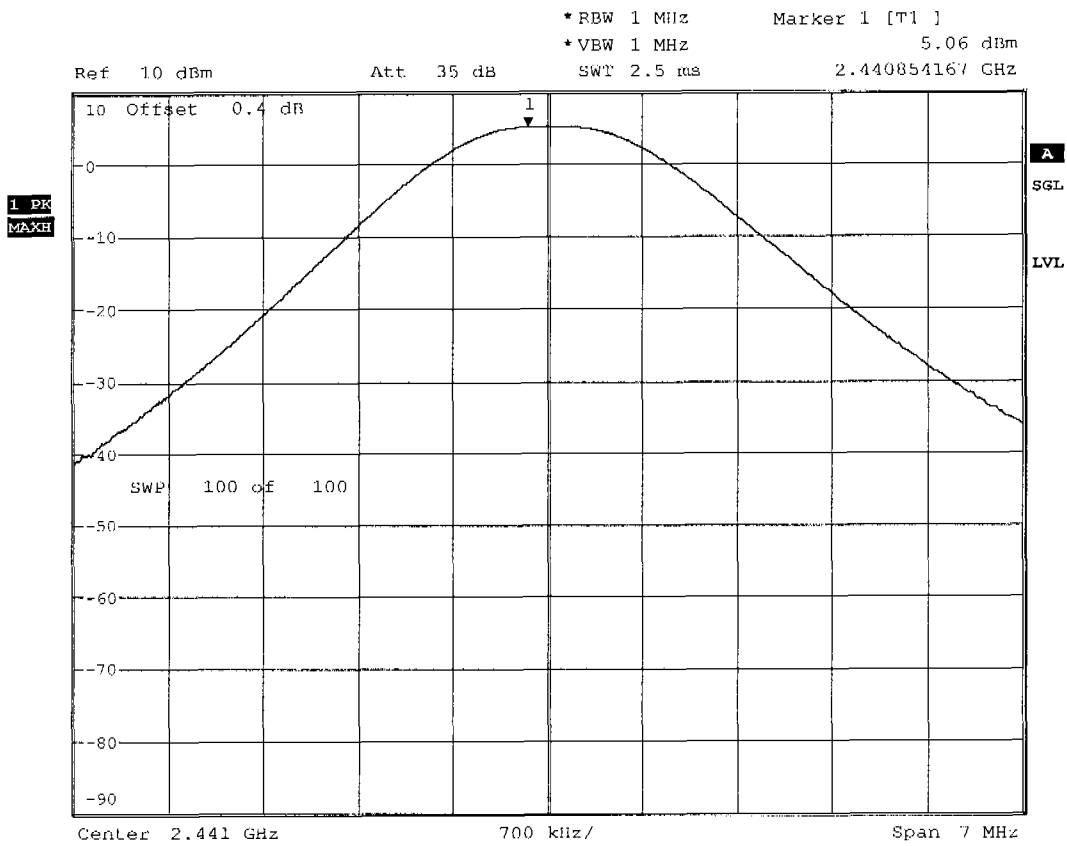


Date: 4.APR.2006 09:34:30

Measurement diagram



FCC part 15.247
Peak output power conducted

EUT	Bluetooth wireless stereo dongle
Model	Jabra A120s
Approval Holder	GN Mobile A/S
Temperature / Voltage	22°C / Unom: 3.7 V DC
Test Site / Operator	ETS / Mr. Handrik
Test Specification	FCC part 15 section 247(b)
Test Case	Peak output power
Comment 1	Channel.: 78 / 2480 MHz
Comment 2	

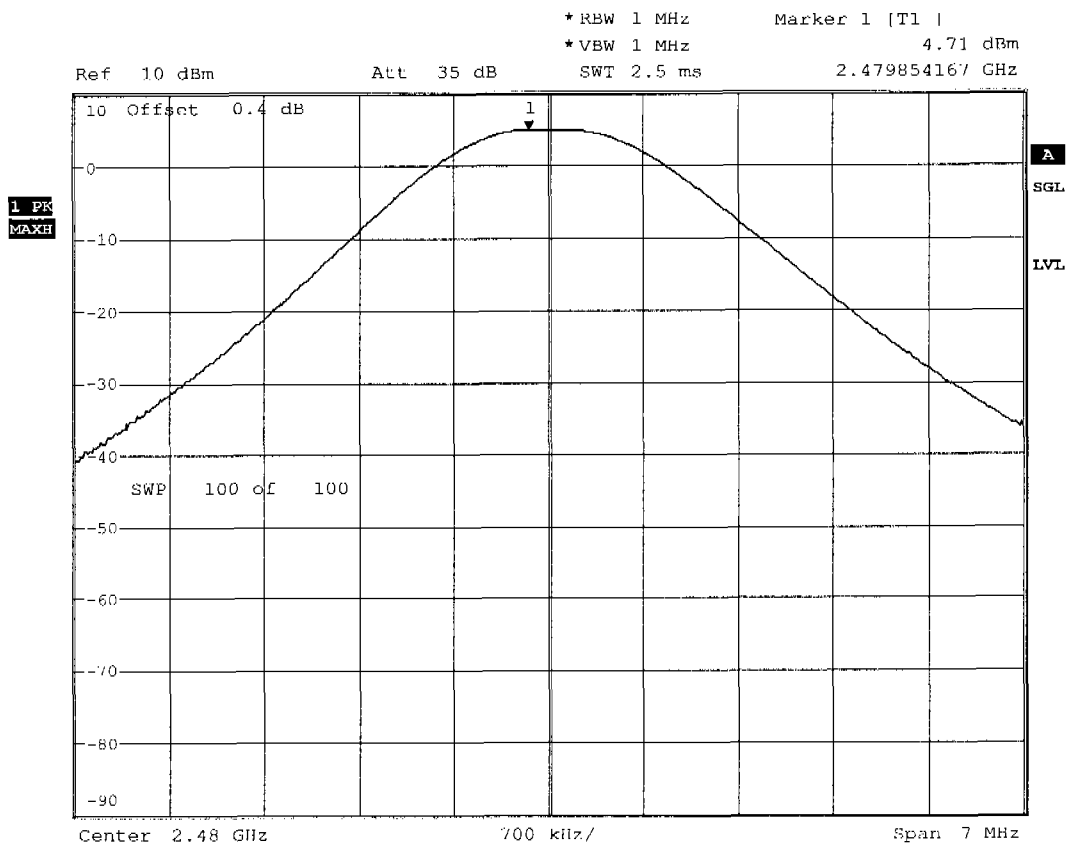

Date: 4.APR.2006 09:35:33

Measurement diagram



Appendix C

RF power output radiated (EIRP)




Appendix D

20 dB bandwidth



FCC part 15.247
20 dB bandwidth

EUT	Bluetooth wireless stereo dongle
Model	Jabra A120s
Approval Holder	GN Mobile A/S
Temperature / Voltage	22°C / Unom: 3.7 V DC
Test Site / Operator	ETS / Mr. Handrik
Test Specification	FCC part 15 section 247(a)
Test Case	20 dB bandwidth
Comment 1	Channel.: 0 / 2402 MHz
Comment 2	

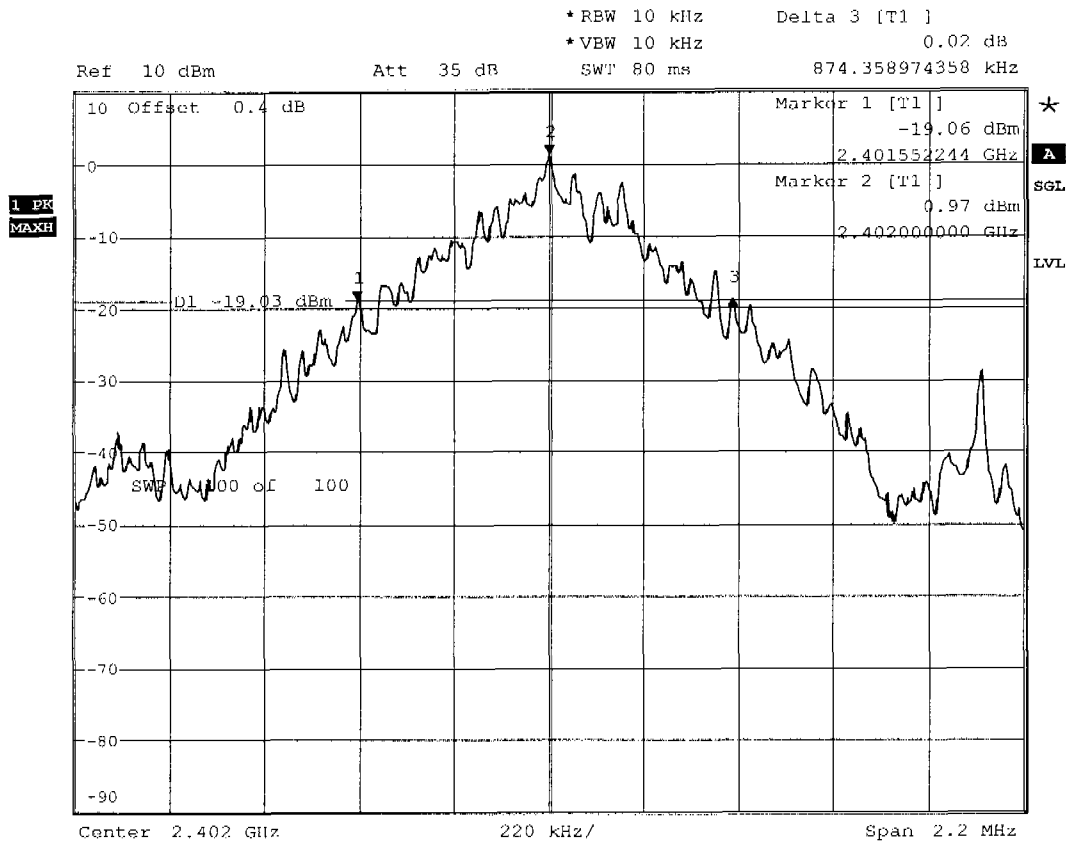


Date: 4.APR.2006 10:38:17

Measurement diagram



FCC part 15.247
20 dB bandwidth

EUT	Bluetooth wireless stereo dongle
Model	Jabra A120s
Approval Holder	GN Mobile A/S
Temperature / Voltage	22°C / Unom: 3.7 V DC
Test Site / Operator	ETS / Mr. Handrik
Test Specification	FCC part 15 section 247(a)
Test Case	20 dB bandwidth
Comment 1	Channel.: 39 / 2441 MHz
Comment 2	

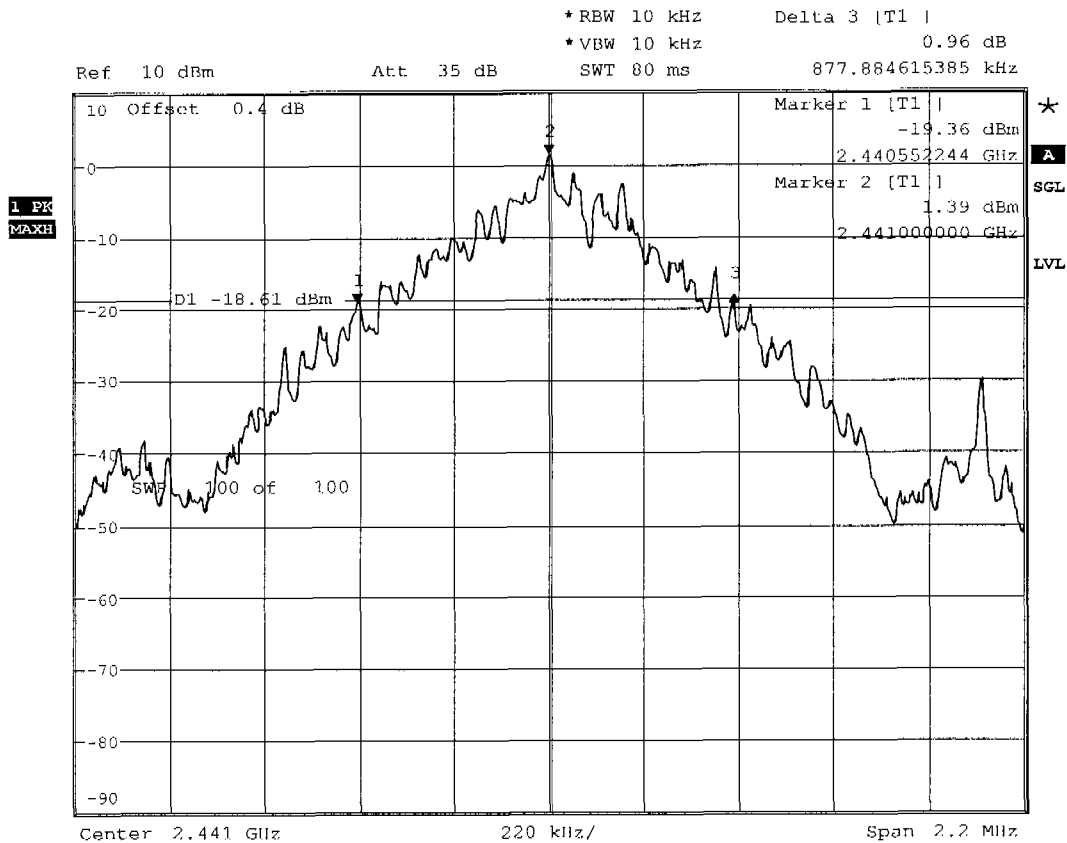


Date: 4.APR.2006 10:35:55

Measurement diagram



FCC part 15.247
20 dB bandwidth

EUT	Bluetooth wireless stereo dongle
Model	Jabra A120s
Approval Holder	GN Mobile A/S
Temperature / Voltage	22°C / Unom: 3.7 V DC
Test Site / Operator	ETS / Mr. Handrik
Test Specification	FCC part 15 section 247(a)
Test Case	20 dB bandwidth
Comment 1	Channel.: 78 / 2480 MHz
Comment 2	

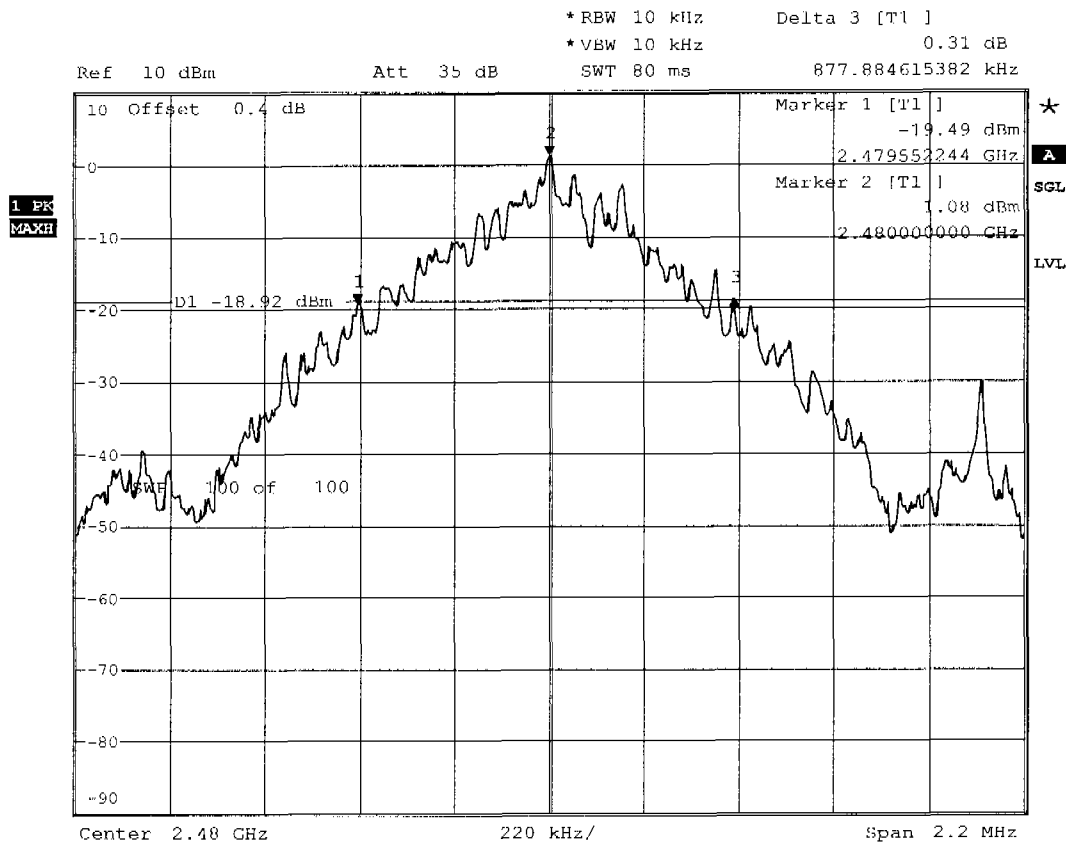

Date: 4.APR.2006 10:33:07

Measurement diagram



Appendix E


Time of occupancy (dwell time)



FCC part 15.247

Time of occupancy (dwell time)

EUT	Bluetooth wireless stereo dongle
Model	Jabra A120s
Approval Holder	GN Mobile A/S
Temperature / Voltage	23°C / Unom 3.7 V DC
Test Site / Operator	ETS / Mr. Handrik
Test Specification	FCC part 15 section 247(a)
Test Case	Time of occupancy
Comment 1	Channel.: 39 / 2441 MHz (Hopping mode)
Comment 2	63 events * 2.924679 ms result: 184.255 ms

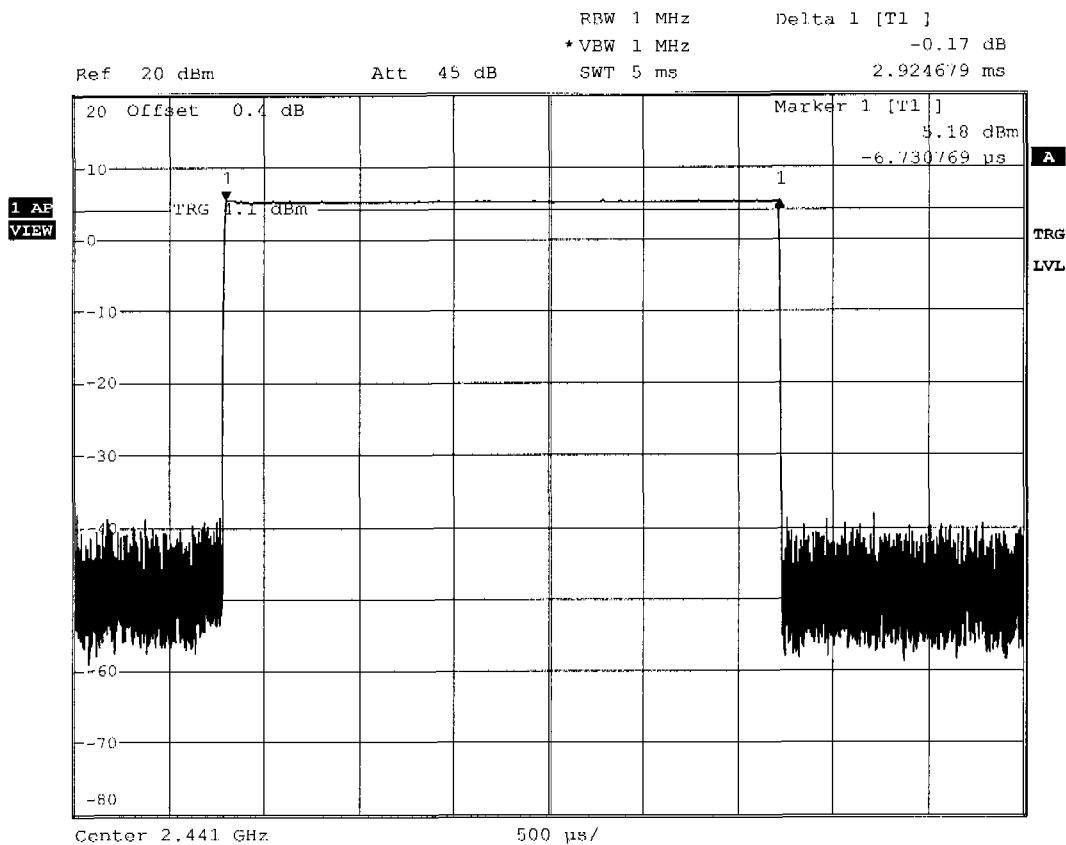


Date: 5.APR.2006 10:35:18

Measurement diagram



FCC part 15.247
Time of occupancy inquiry

EUT	Bluetooth wireless stereo dongle
Model	Jabra A120s
Approval Holder	GN Mobile A/S
Temperature / Voltage	23°C / Unom 3.7 V DC
Test Site / Operator	ETS / Mr. Handrik
Test Specification	FCC part 15 section 247(a)
Test Case	Time of occupancy inquiry
Comment 1	Channel.: 39 / 2441 MHz
Comment 2	Inquiry mode 340 events * 0.117788462ms = 40.05 ms

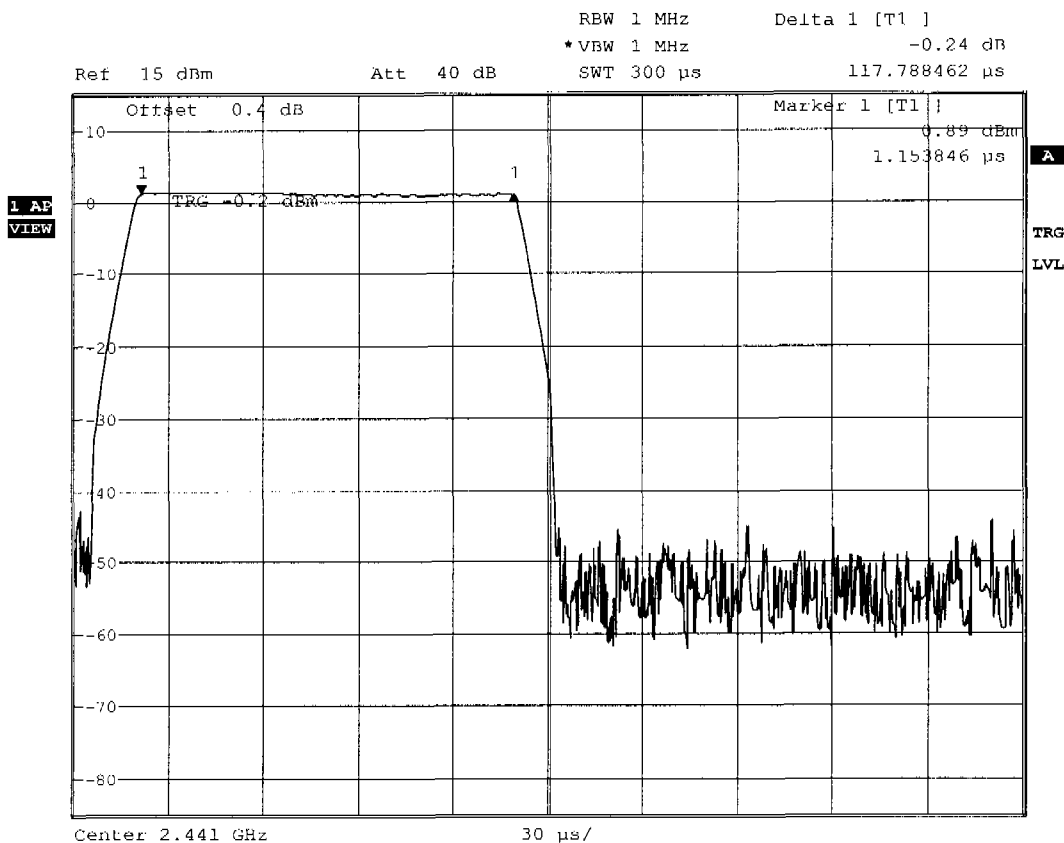

Date: 5.APR.2006 11:54:07

Measurement diagram




Appendix F

Number of hopping frequencies



FCC part 15.247
Number of hopping frequencies

EUT	Bluetooth wireless stereo dongle
Model	Jabra A120s
Approval Holder	GN Mobile A/S
Temperature / Voltage	23°C / Unom 3.7 V DC
Test Site / Operator	ETS / Mr. Handrik
Test Specification	FCC part 15 section 247(a)
Test Case	Number of hopping frequencies
Comment 1	Channel.: 0-13
Comment 2	

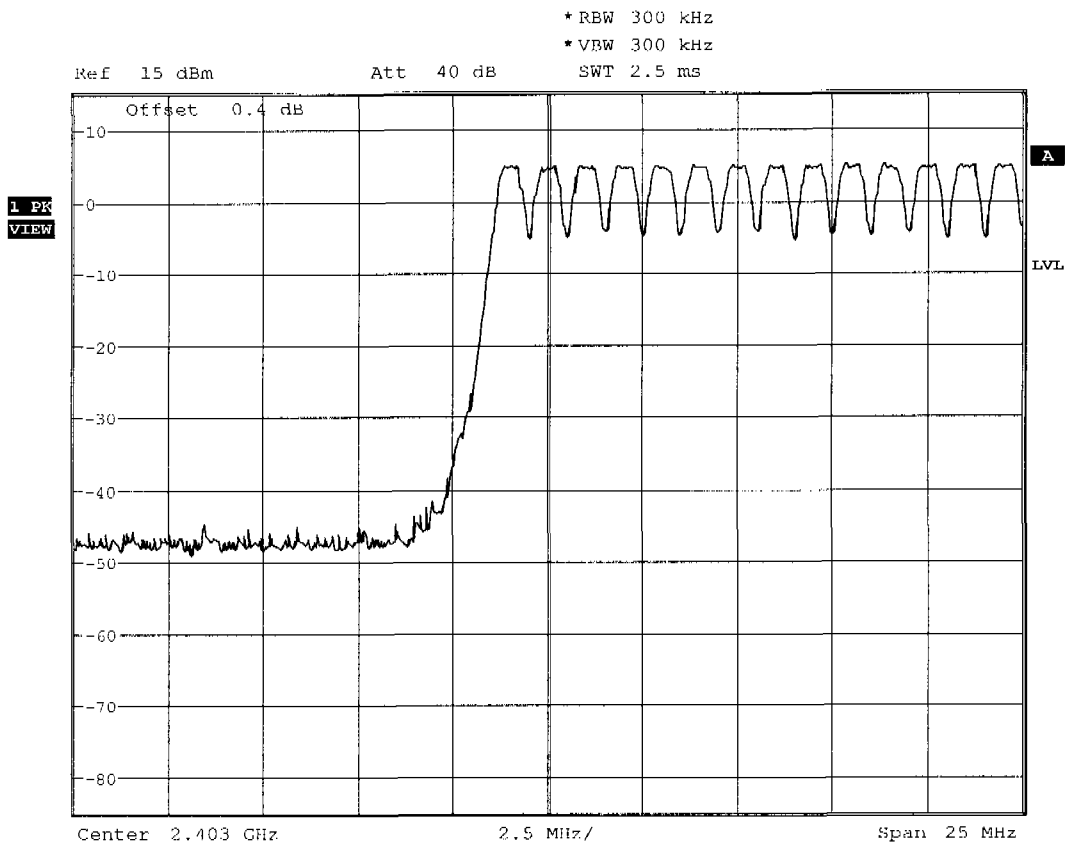


Date: 5.APR.2006 09:18:53

Measurement diagram



FCC part 15.247
Number of hopping frequencies

EUT	Bluetooth wireless stereo dongle
Model	Jabra A120s
Approval Holder	GN Mobile A/S
Temperature / Voltage	23°C / Unom 3.7 V DC
Test Site / Operator	ETS / Mr. Handrik
Test Specification	FCC part 15 section 247(a)
Test Case	Number of hopping frequencies
Comment 1	Channel.: 14-38
Comment 2	

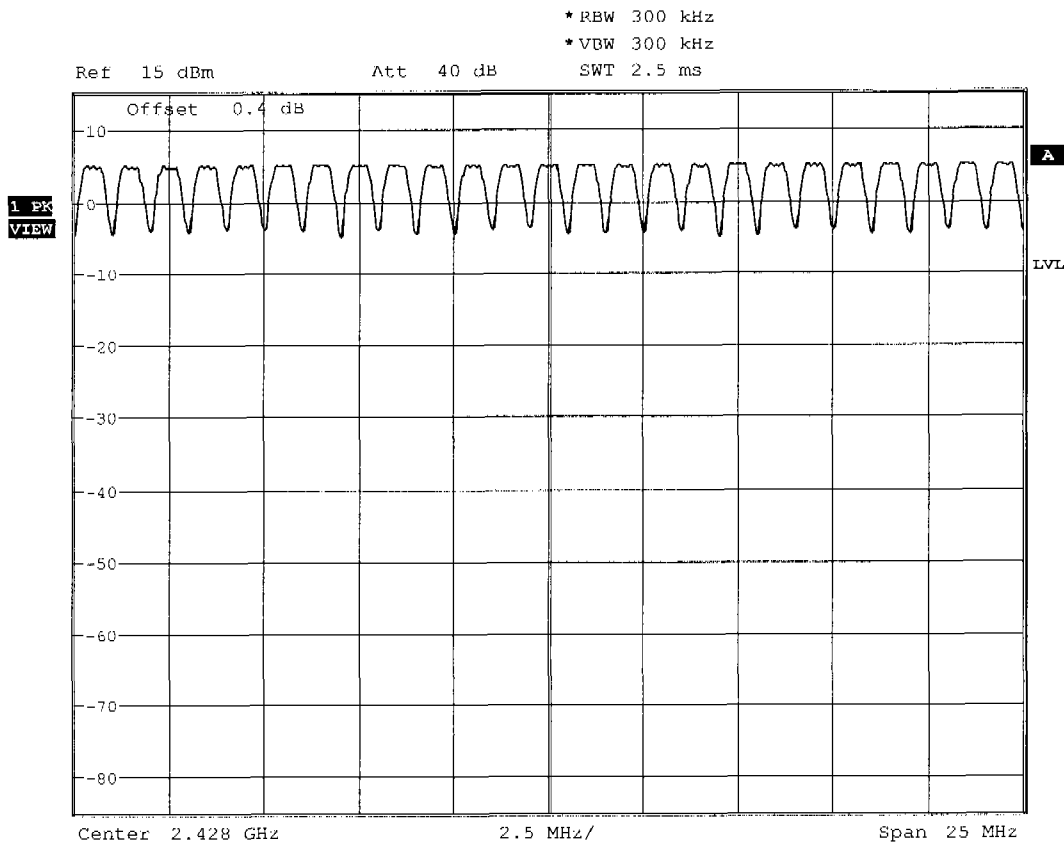


Date: 5.APR.2006 09:20:56

Measurement diagram



FCC part 15.247
Number of hopping frequencies

EUT	Bluetooth wireless stereo dongle
Model	Jabra A120s
Approval Holder	GN Mobile A/S
Temperature / Voltage	23°C / Unom 3.7 V DC
Test Site / Operator	ETS / Mr. Handrik
Test Specification	FCC part 15 section 247(a)
Test Case	Number of hopping frequencies
Comment 1	Channel.:39-63
Comment 2	

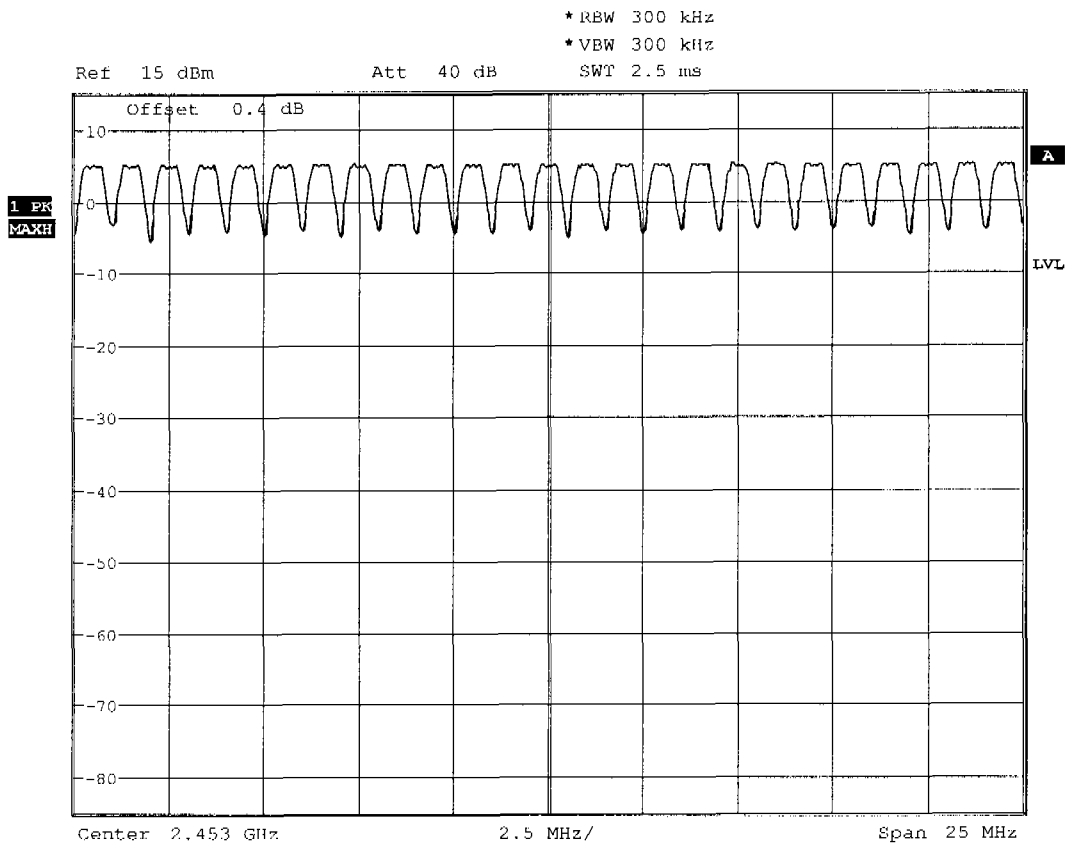


Date: 5. APR. 2006 09:22:32

Measurement diagram



FCC part 15.247
Number of hopping frequencies

EUT	Bluetooth wireless stereo dongle
Model	Jabra A120s
Approval Holder	GN Mobile A/S
Temperature / Voltage	23°C / Unom 3.7 V DC
Test Site / Operator	ETS / Mr. Handrik
Test Specification	FCC part 15 section 247(a)
Test Case	Number of hopping frequencies
Comment 1	Channel.: 64-78
Comment 2	

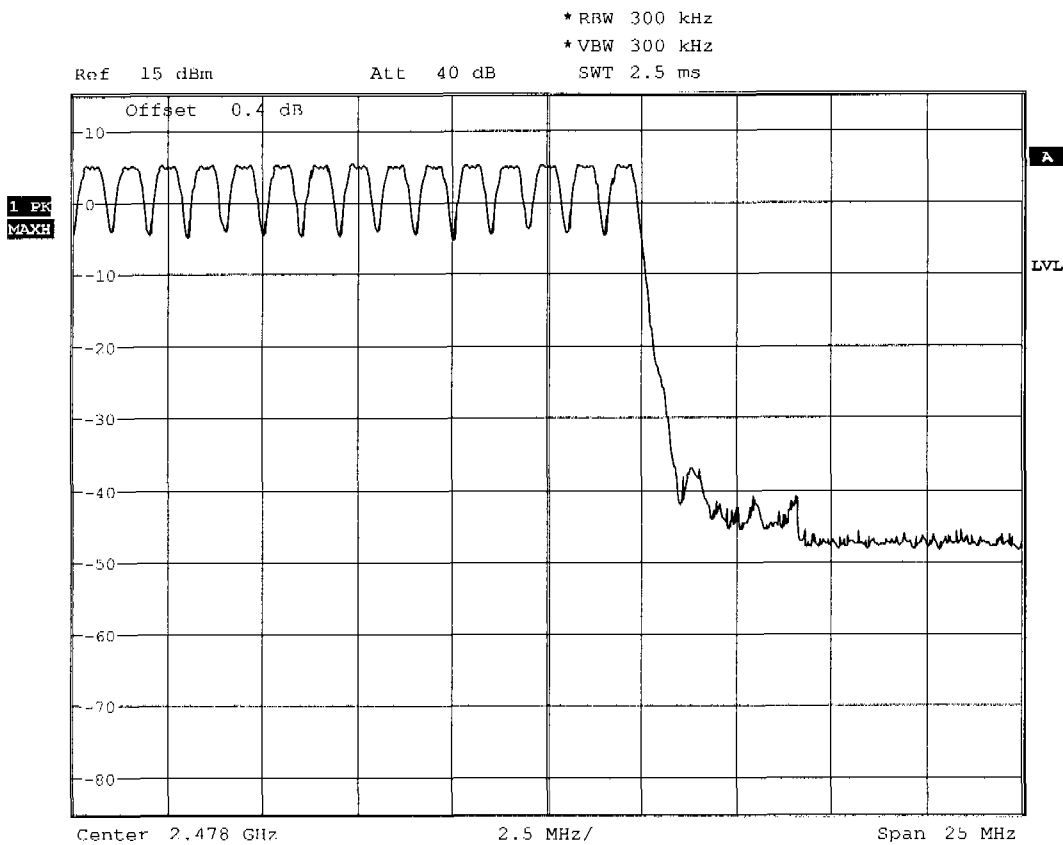


Date: 5.APR.2006 09:23:58

Measurement diagram

FCC part 15.247**Number of hopping frequencies**

EUT	Bluetooth wireless stereo dongle
Model	Jabra A120s
Approval Holder	GN Mobile A/S
Temperature / Voltage	23°C / Unom 3.7 V DC
Test Site / Operator	ETS / Mr. Handrik
Test Specification	FCC part 15 section 247(a)
Test Case	Number of hopping frequencies
Comment 1	master inquiry mode
Comment 2	

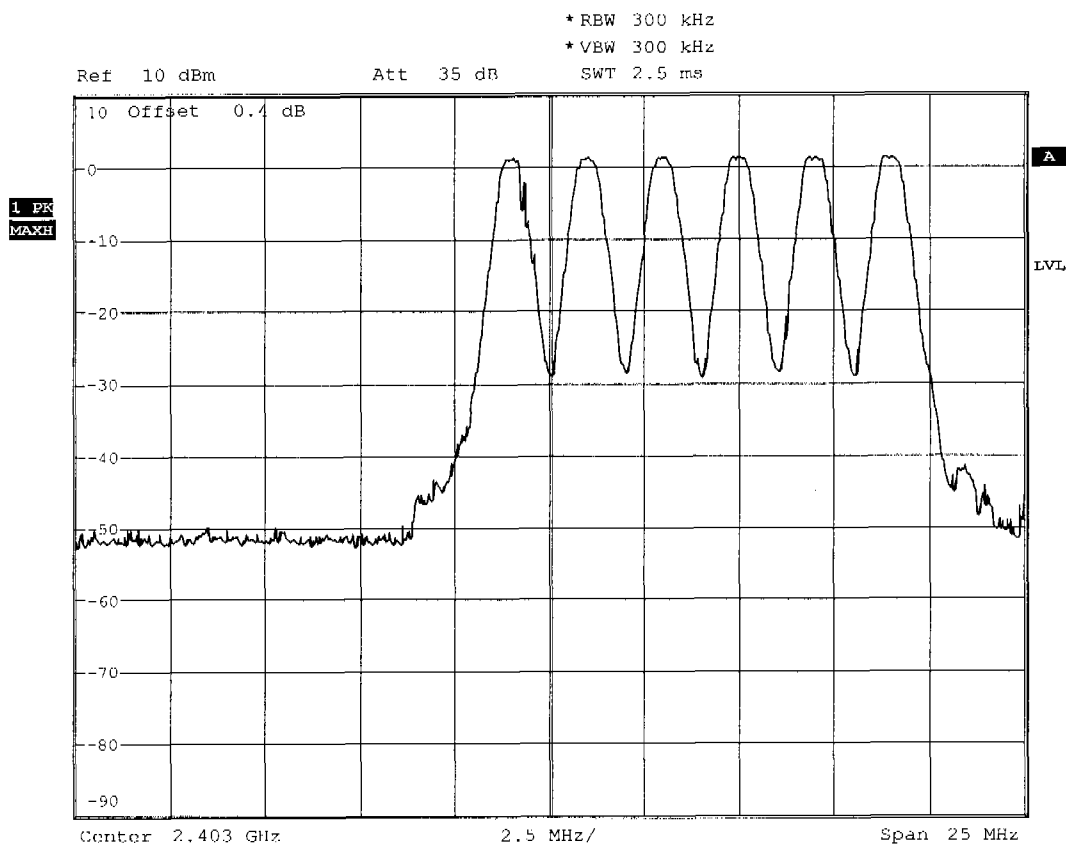


Date: 5.APR.2006 11:12:33

Measurement diagram

FCC part 15.247

Number of hopping frequencies

EUT	Bluetooth wireless stereo dongle
Model	Jabra A120s
Approval Holder	GN Mobile A/S
Temperature / Voltage	23°C / Unom 3.7 V DC
Test Site / Operator	ETS / Mr. Handrik
Test Specification	FCC part 15 section 247(a)
Test Case	Number of hopping frequencies
Comment 1	master inquiry mode
Comment 2	

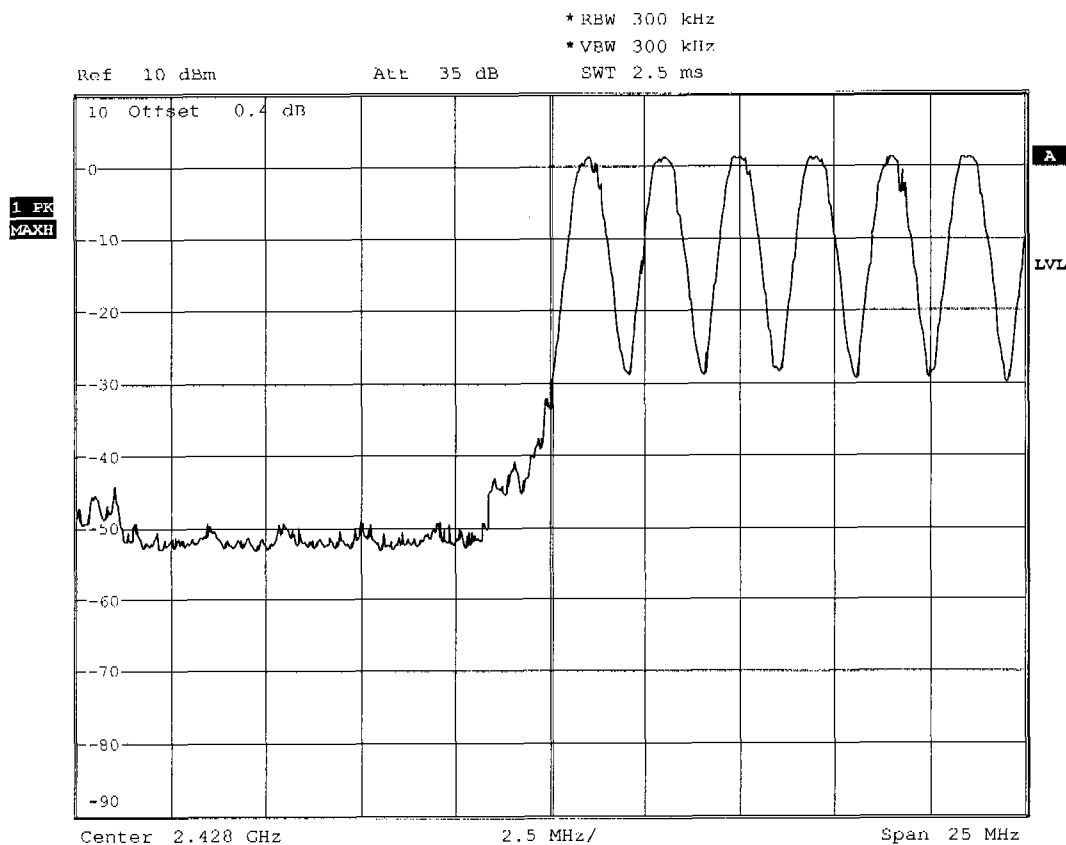


Date: 5.APR.2006 11:07:02

Measurement diagram



FCC part 15.247
Number of hopping frequencies

EUT	Bluetooth wireless stereo dongle
Model	Jabra A120s
Approval Holder	GN Mobile A/S
Temperature / Voltage	23°C / Unom 3.7 V DC
Test Site / Operator	ETS / Mr. Handrik
Test Specification	FCC part 15 section 247(a)
Test Case	Number of hopping frequencies
Comment 1	master inquiry mode
Comment 2	

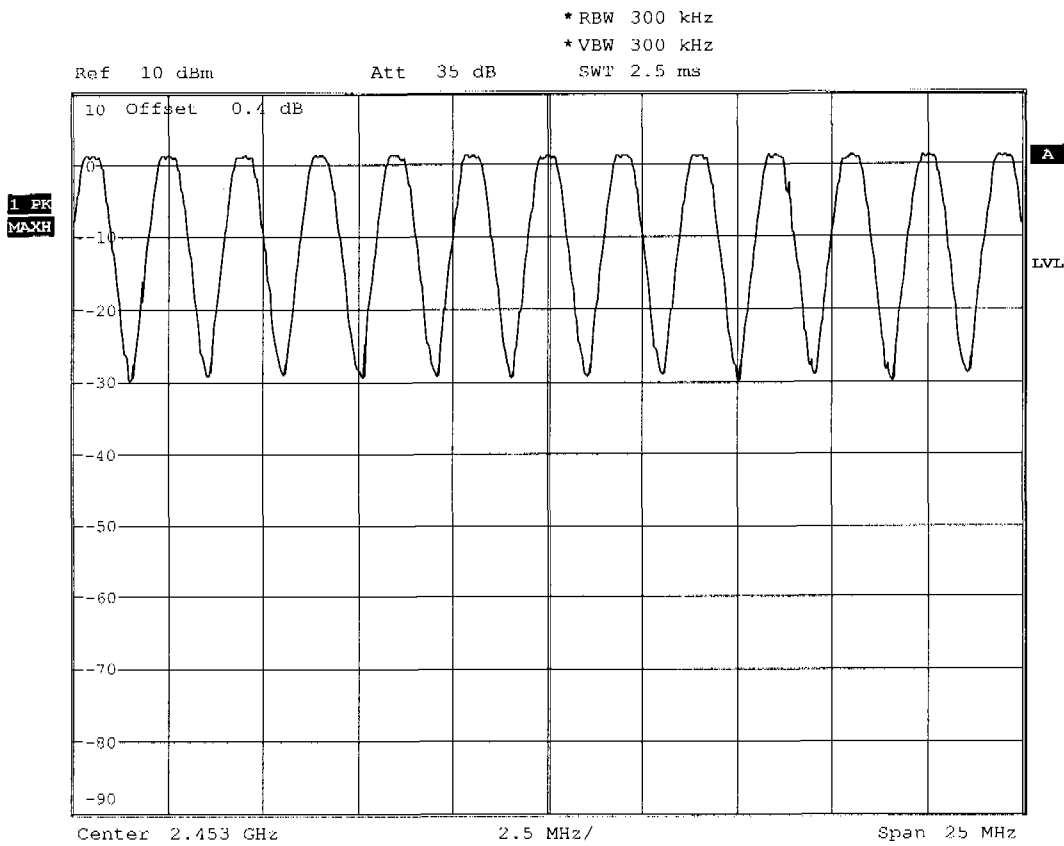


Date: 5.APR.2006 11:15:39

Measurement diagram

FCC part 15.247
Number of hopping frequencies

EUT	Bluetooth wireless stereo dongle
Model	Jabra A120s
Approval Holder	GN Mobile A/S
Temperature / Voltage	23°C / Unom 3.7 V DC
Test Site / Operator	ETS / Mr. Handrik
Test Specification	FCC part 15 section 247(a)
Test Case	Number of hopping frequencies
Comment 1	master inquiry mode
Comment 2	

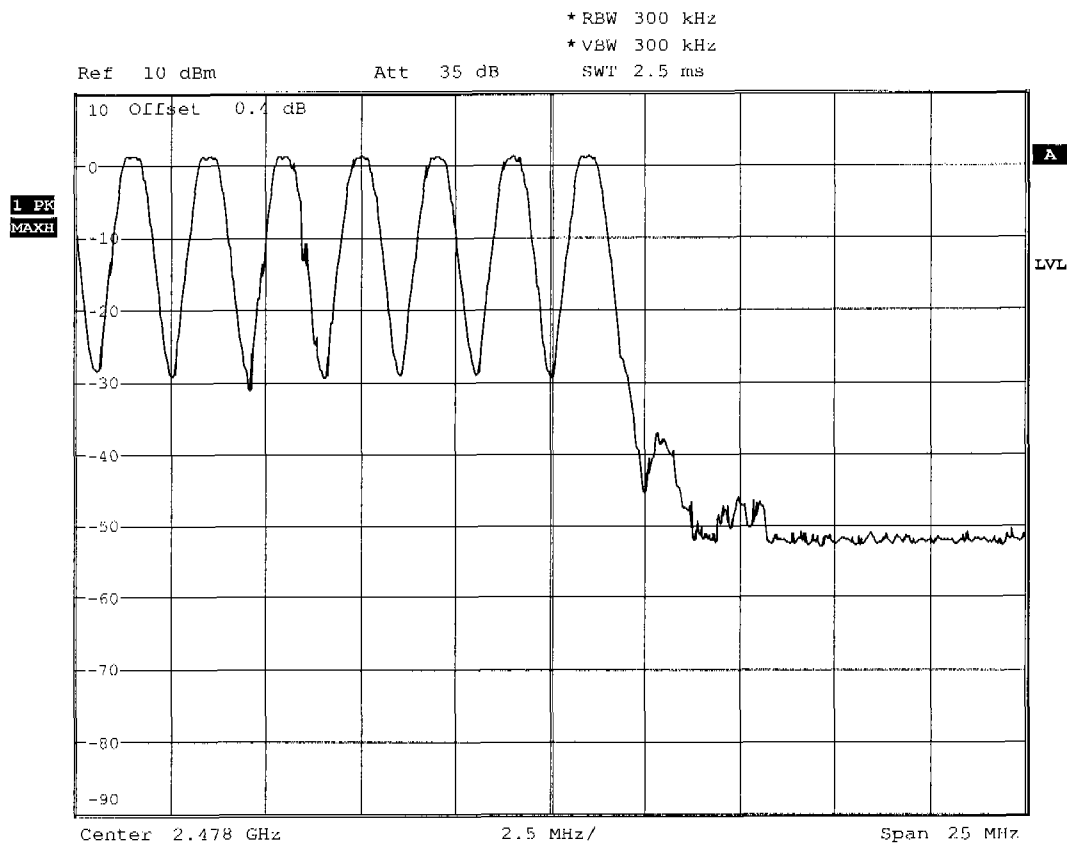

Date: 5.APR.2006 11:18:22

Measurement diagram




Appendix G

Carrier frequency separation



FCC part 15.247
Carrier frequency separation

EUT	Bluetooth wireless stereo dongle
Model	Jabra A120s
Approval Holder	GN Mobile A/S
Temperature / Voltage	23°C / Unom 3.7 V DC
Test Site / Operator	ETS / Mr. Handrik
Test Specification	FCC part 15 section 247(b)
Test Case	Carrier frequency separation
Comment 1	Channel.: 39/40 / 2441/2442 MHz
Comment 2	Hopping mode

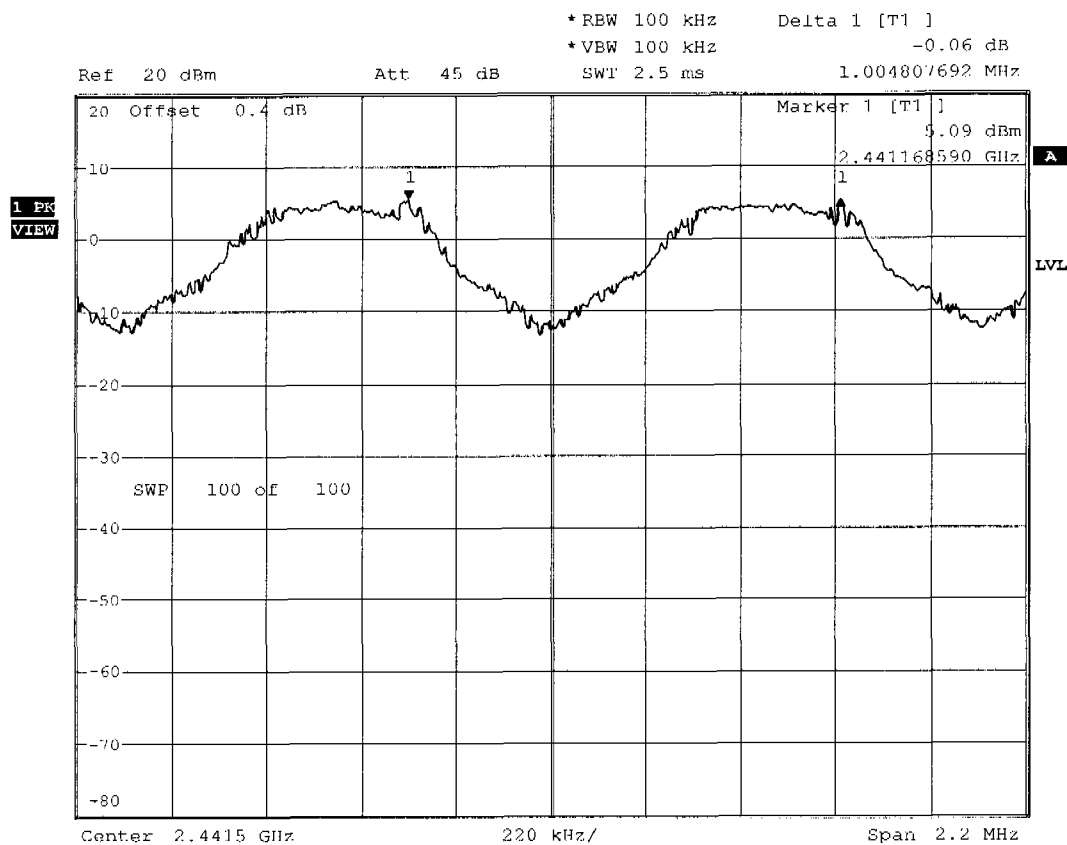


Date: 5.APR.2006 08:23:04

Measurement diagram



FCC part 15.247
Duty cycle

EUT	Bluetooth wireless stereo dongle
Model	Jabra A120s
Approval Holder	GN Mobile A/S
Temperature / Voltage	23°C / Unom 3.7 V DC
Test Site / Operator	ETS / Mr. Handrik
Test Specification	FCC part 15 section 247(b)
Test Case	Duty cycle
Comment 1	Channel.: 39 / 2441 MHz
Comment 2	

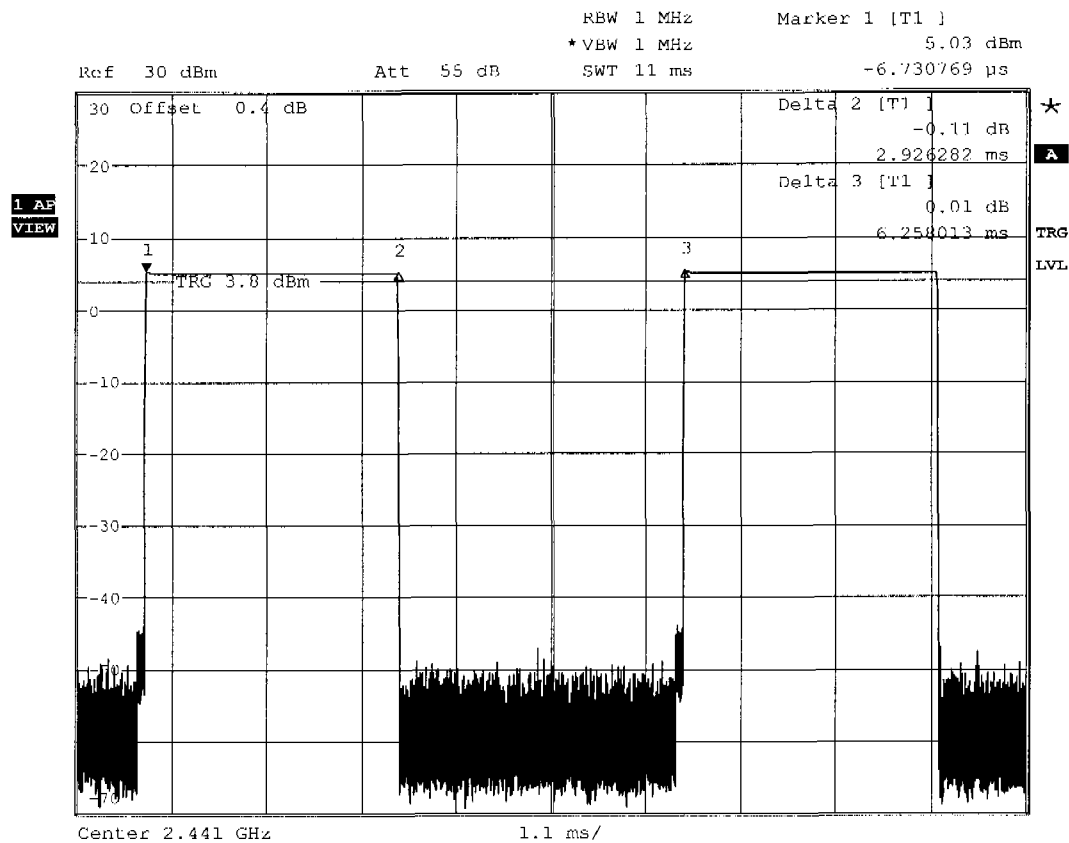

Date: 5.APR.2006 08:26:44

Measurement diagram



Appendix H

Spurious emission conducted




Appendix I

Spurious emission radiated

Carrier power (Field Strength)

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2480 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Emax: 98.09dBµV/m, RBW: 100kHz

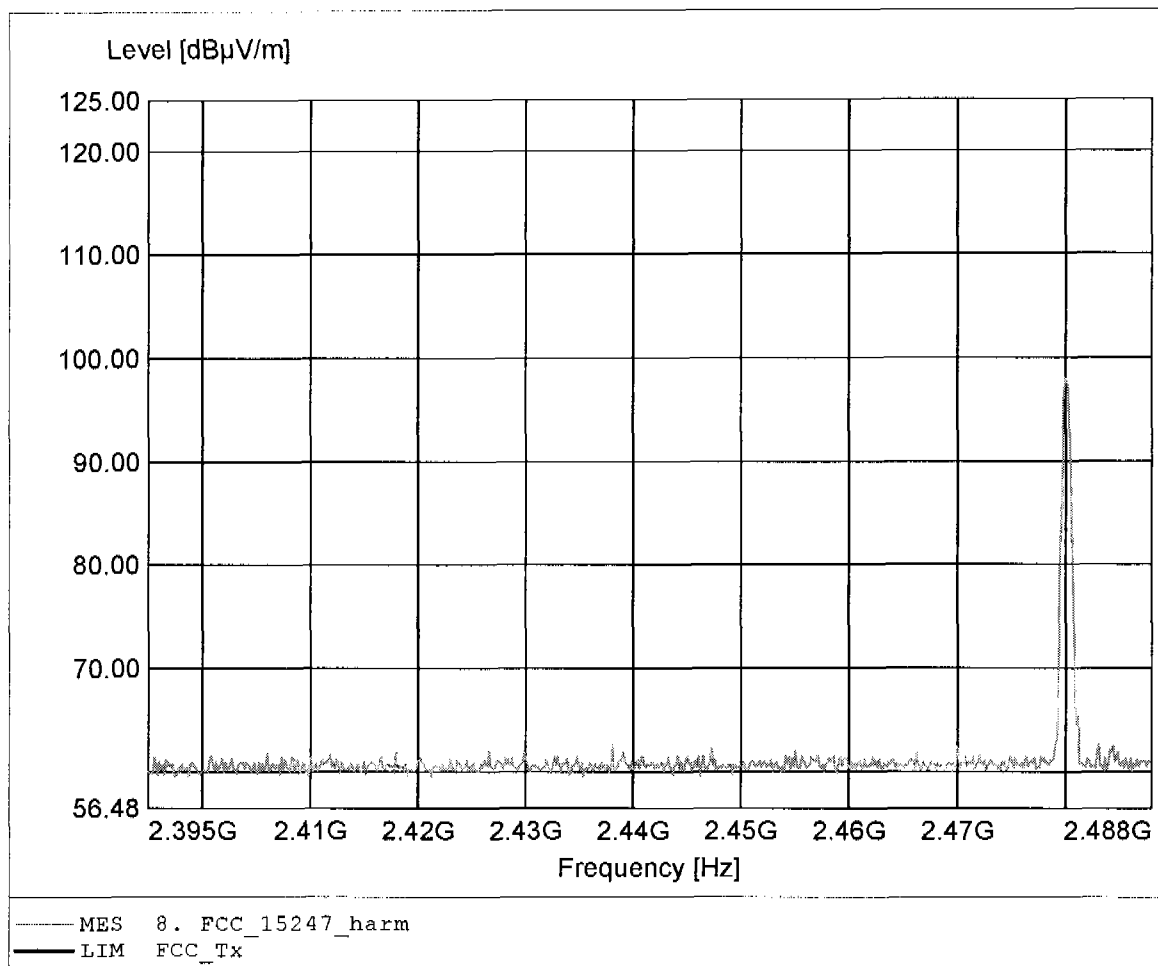

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2402 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 200.000MHz, Emax: 31.43dBµV/m, RBW: 100kHz

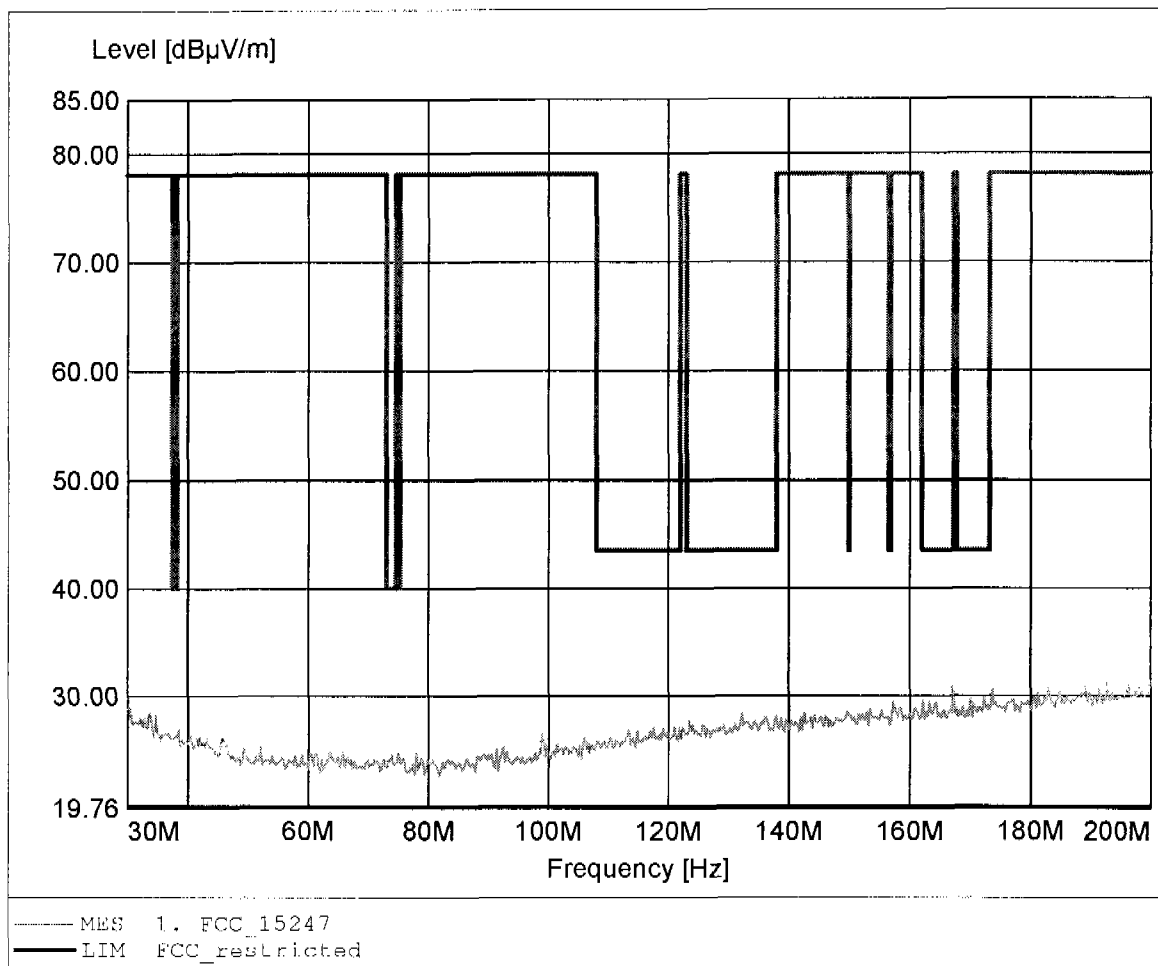

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2402 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 185.288MHz, Emax: 31.02dBµV/m, RBW: 100kHz

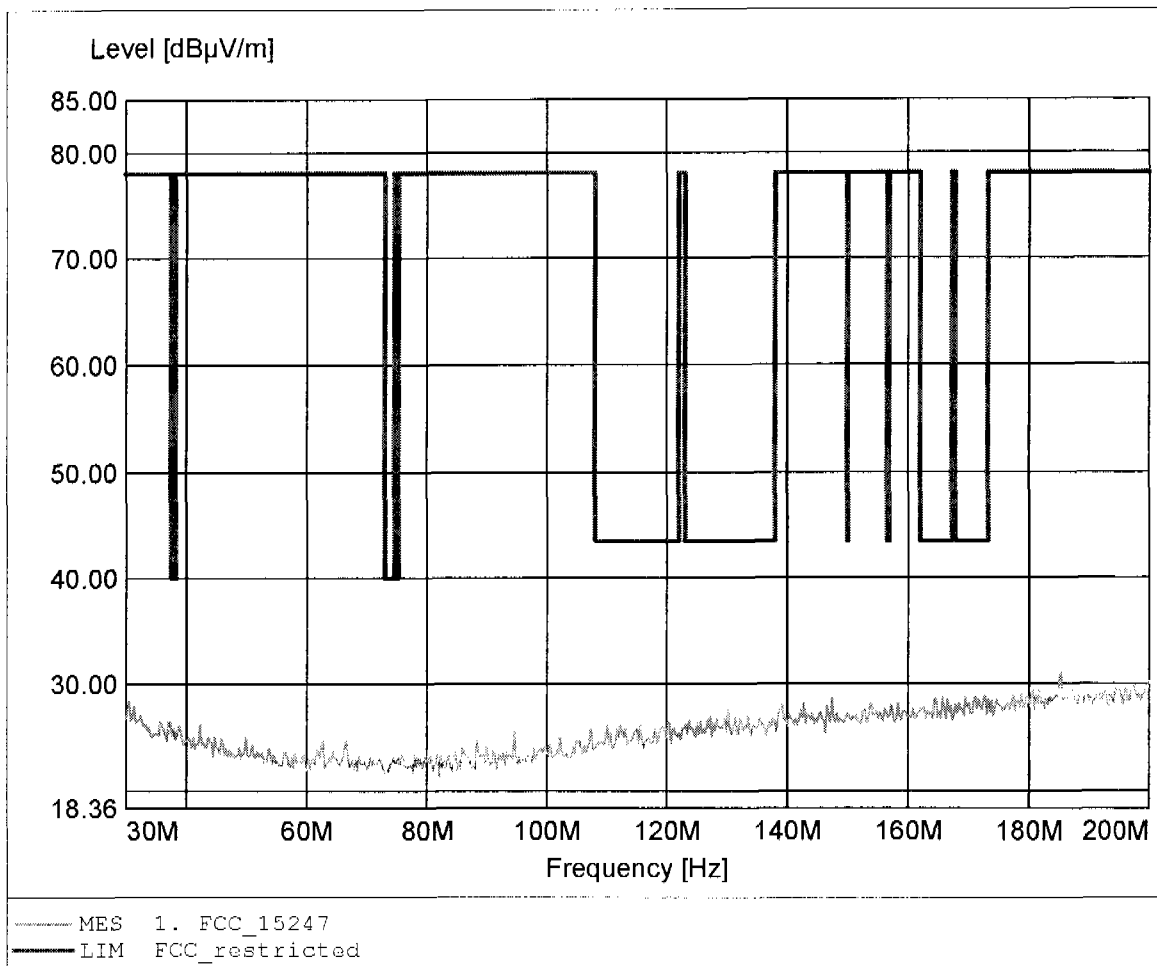

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2402 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 355.128MHz, Emax: 30.80dBµV/m, RBW: 100kHz

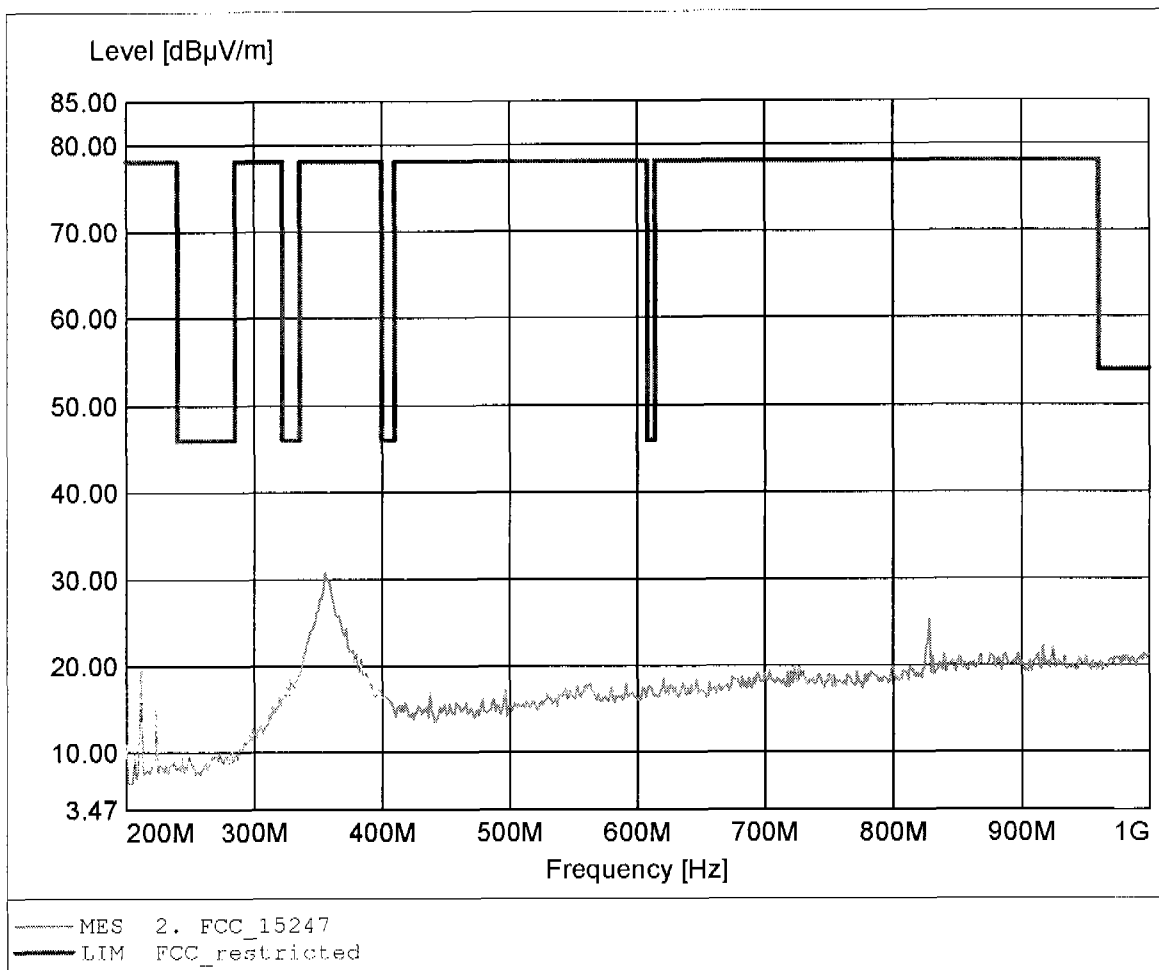

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2402 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 800.000MHz, Emax: 24.64dBµV/m, RBW: 100kHz

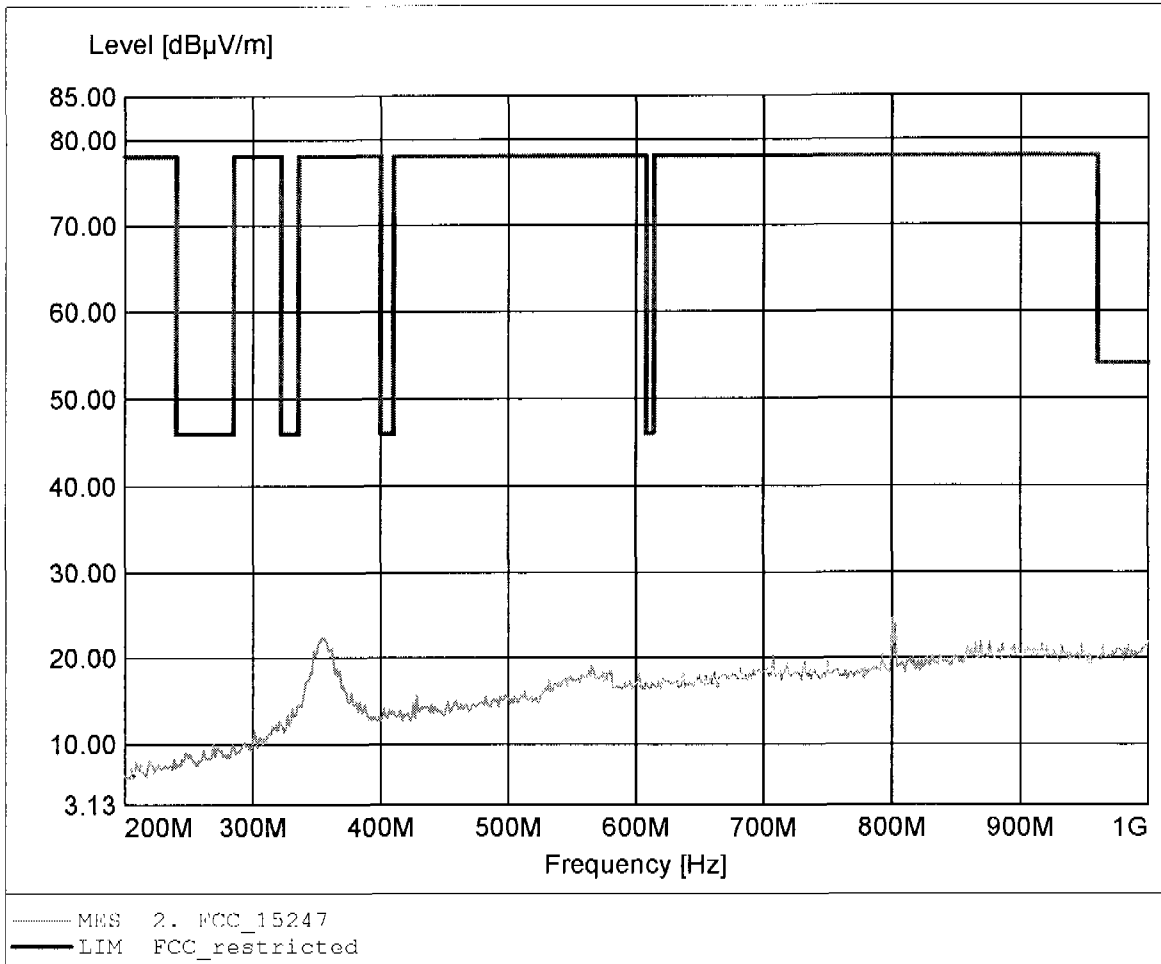

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2402 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.387GHz, Emax: 43.23dBµV/m, RBW: 1MHz

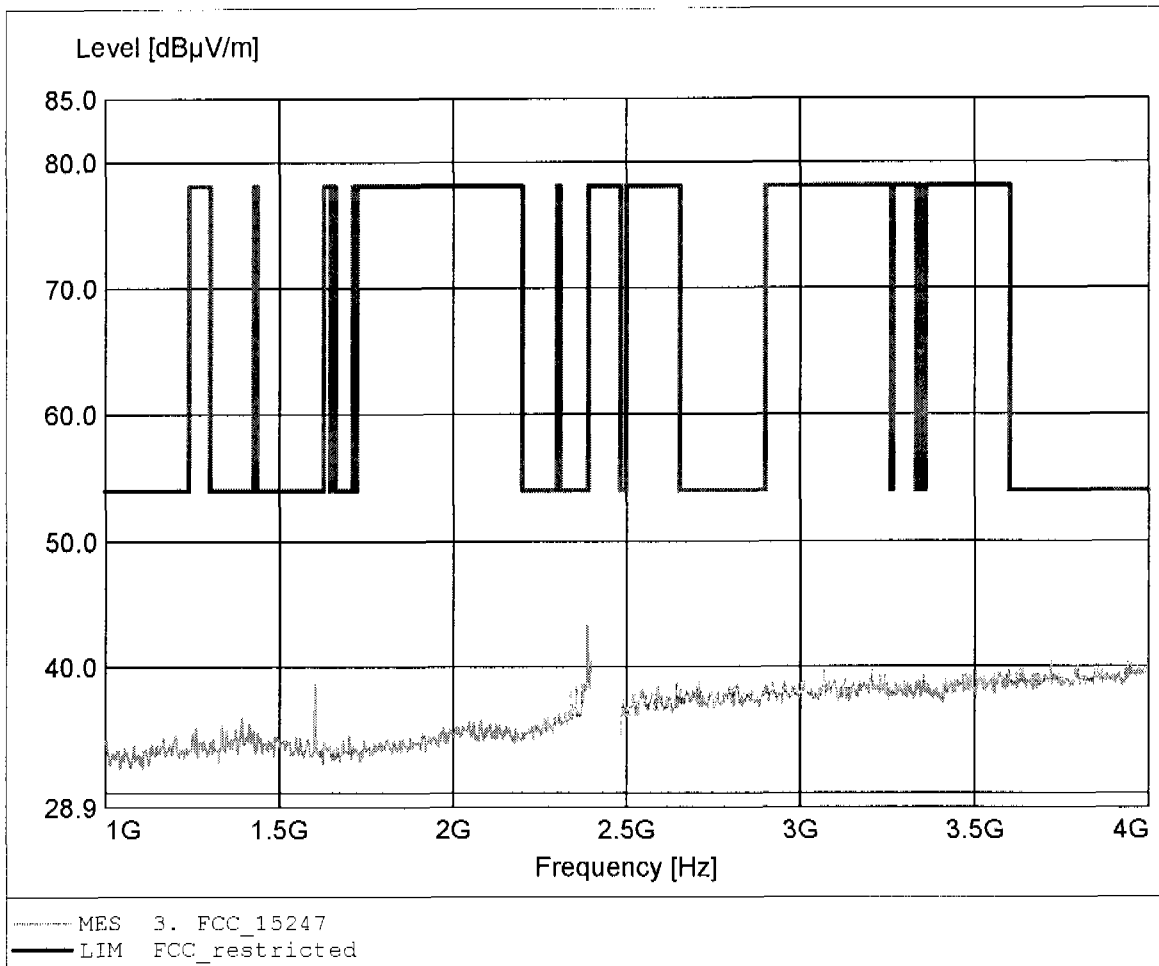

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2402 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.601GHz, Emax: 42.76dBµV/m, RBW: 1MHz

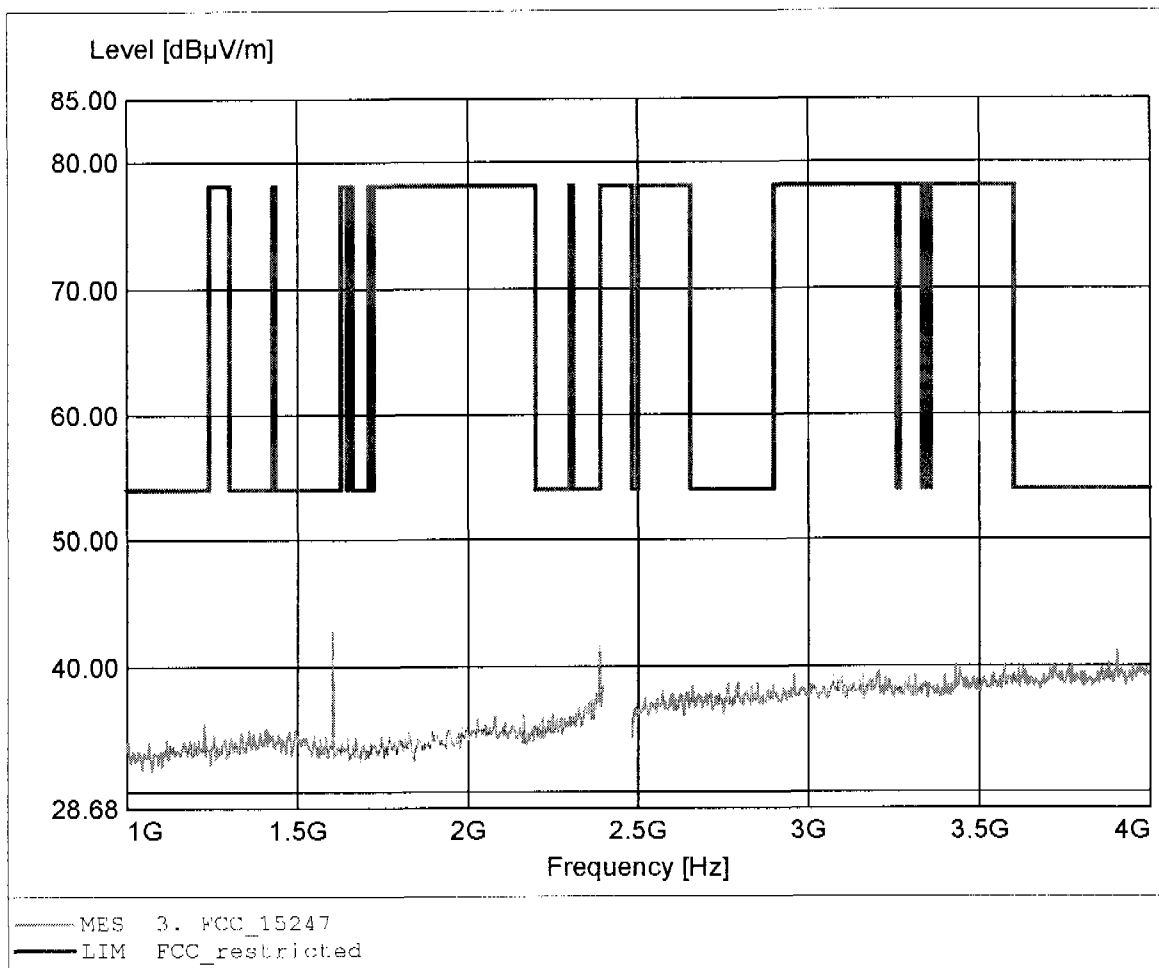

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2402 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.801GHz, Emax: 43.35dBµV/m, RBW: 1MHz

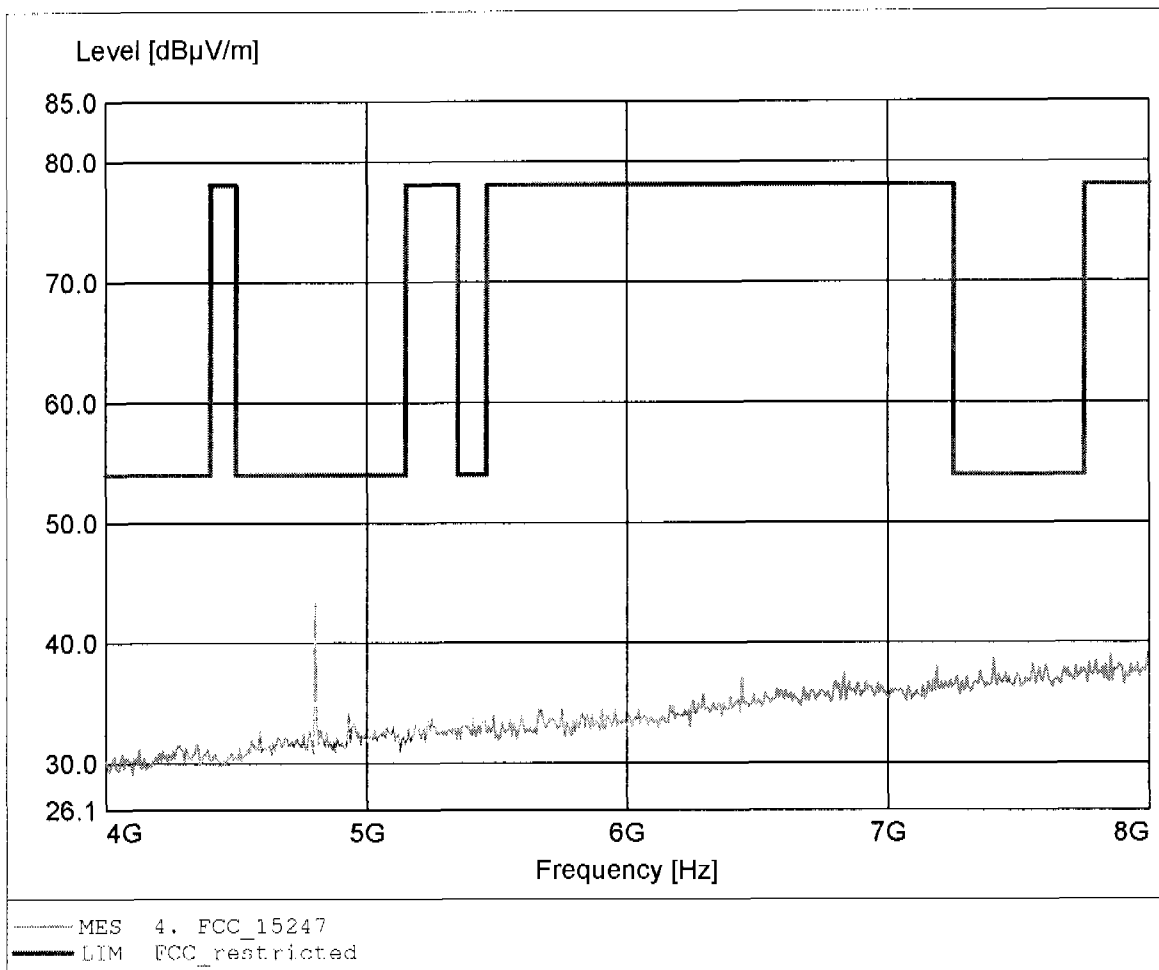

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2402 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.801GHz, Emax: 44.83dBµV/m, RBW: 1MHz

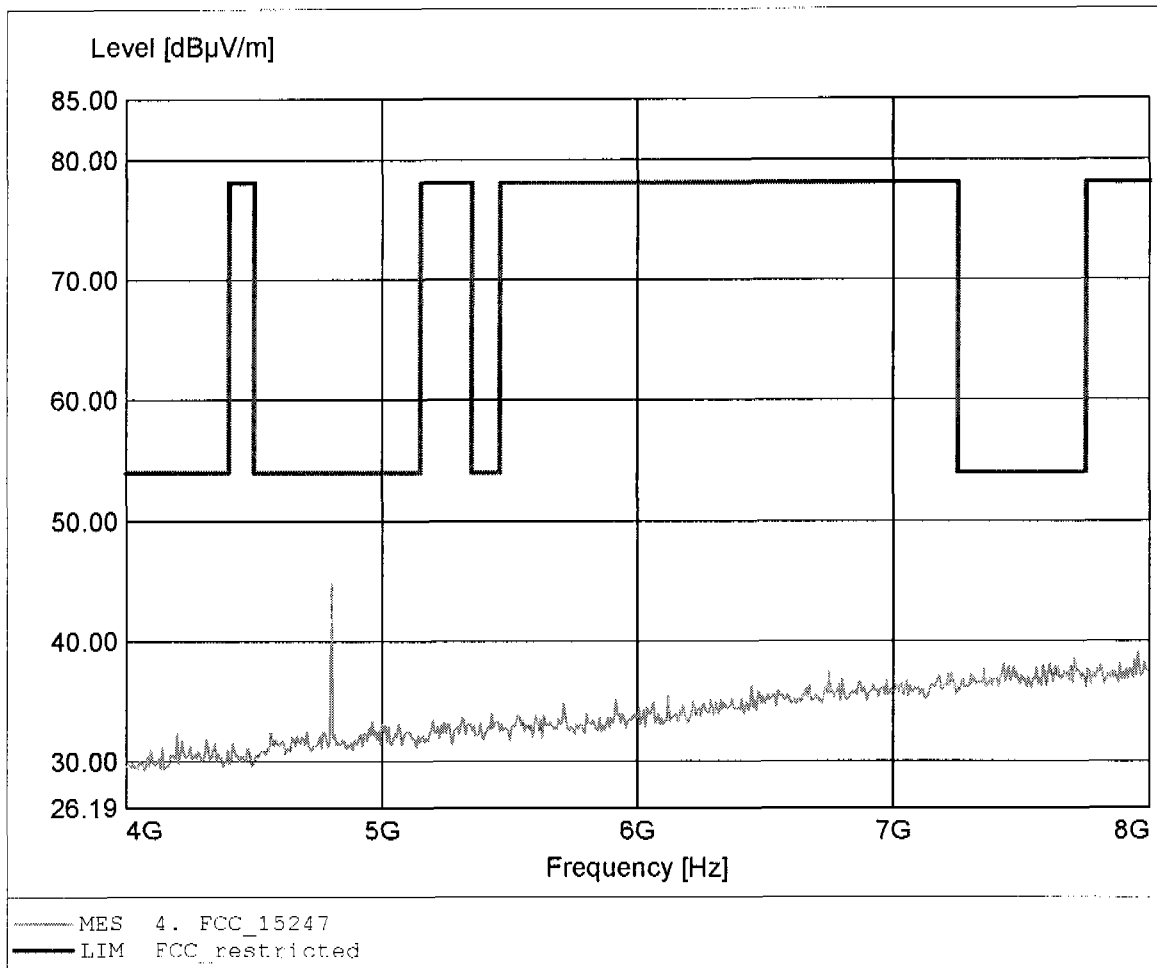

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2402 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.365GHz, Emax: 42.80dBµV/m, RBW: 1MHz

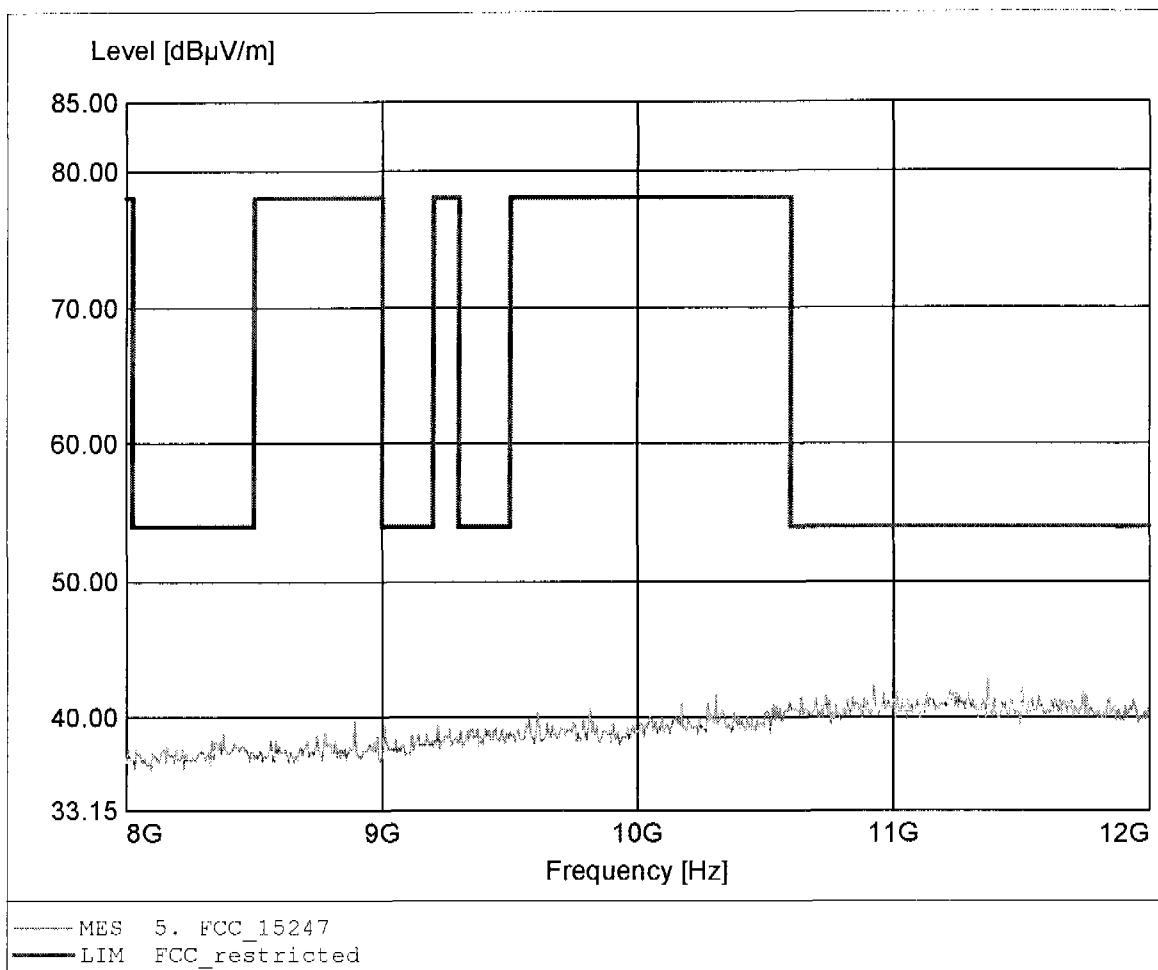

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2402 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.064GHz, Emax: 42.47dBµV/m, RBW: 1MHz

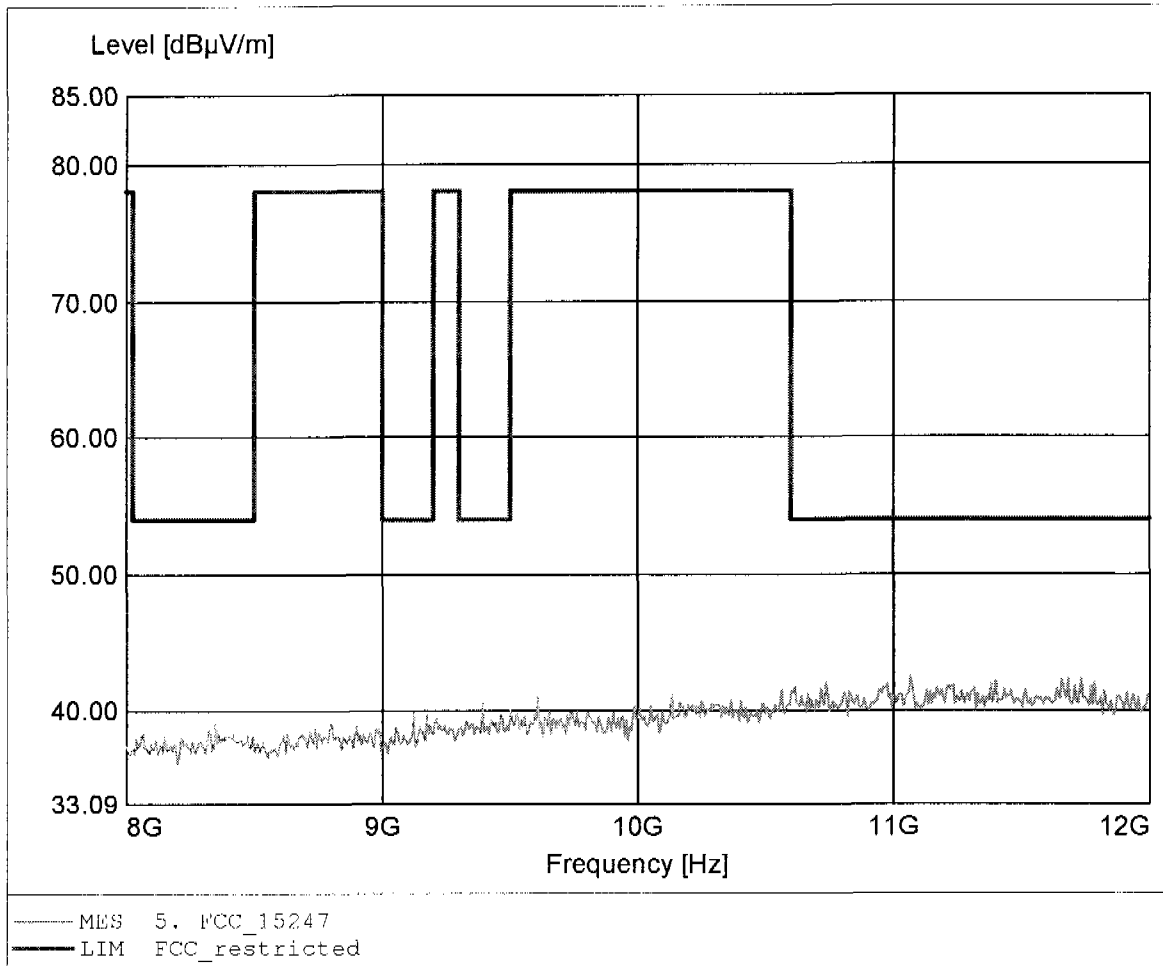

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2402 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.612GHz, Emax: 44.53dBµV/m, RBW: 1MHz

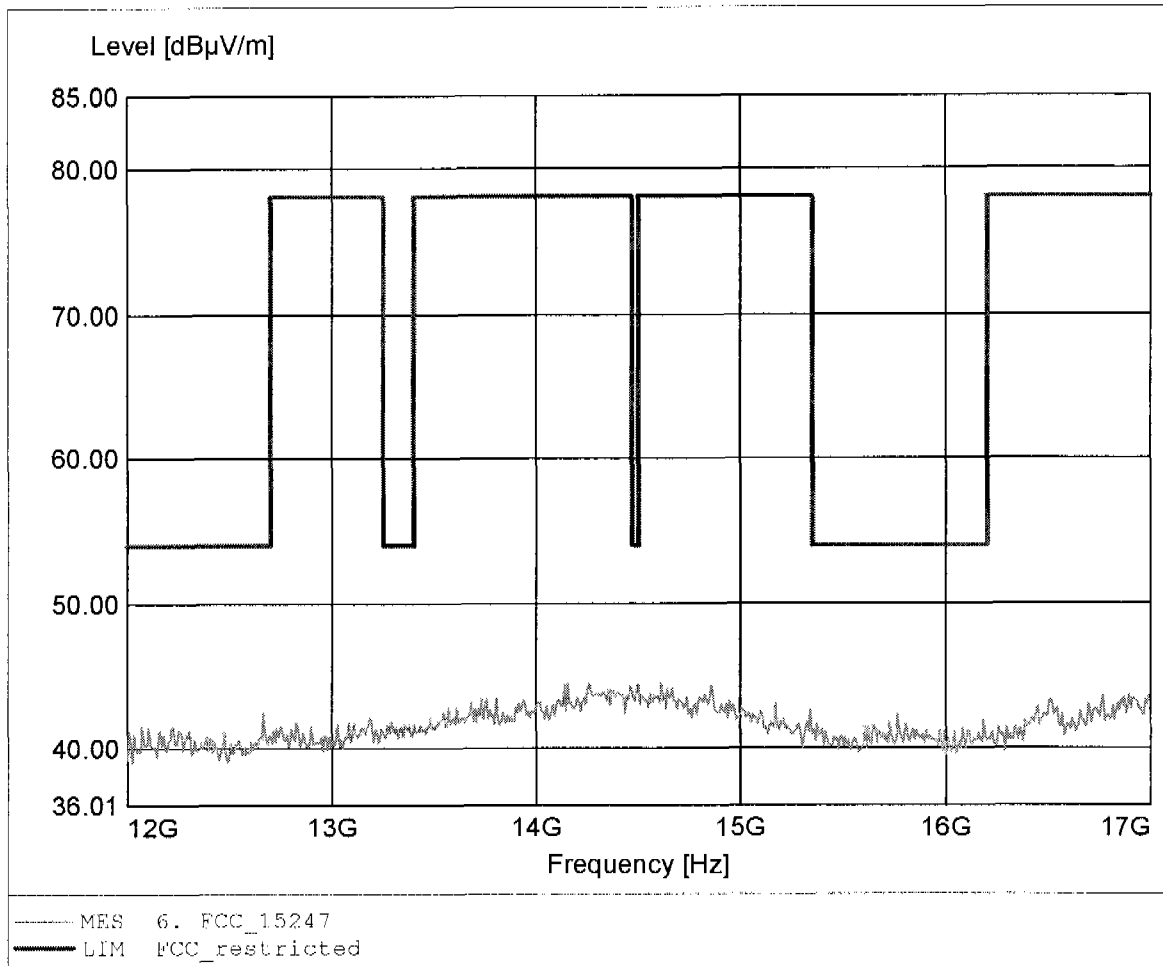

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2402 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.268GHz, Emax: 44.67dBuV/m, RBW: 1MHz

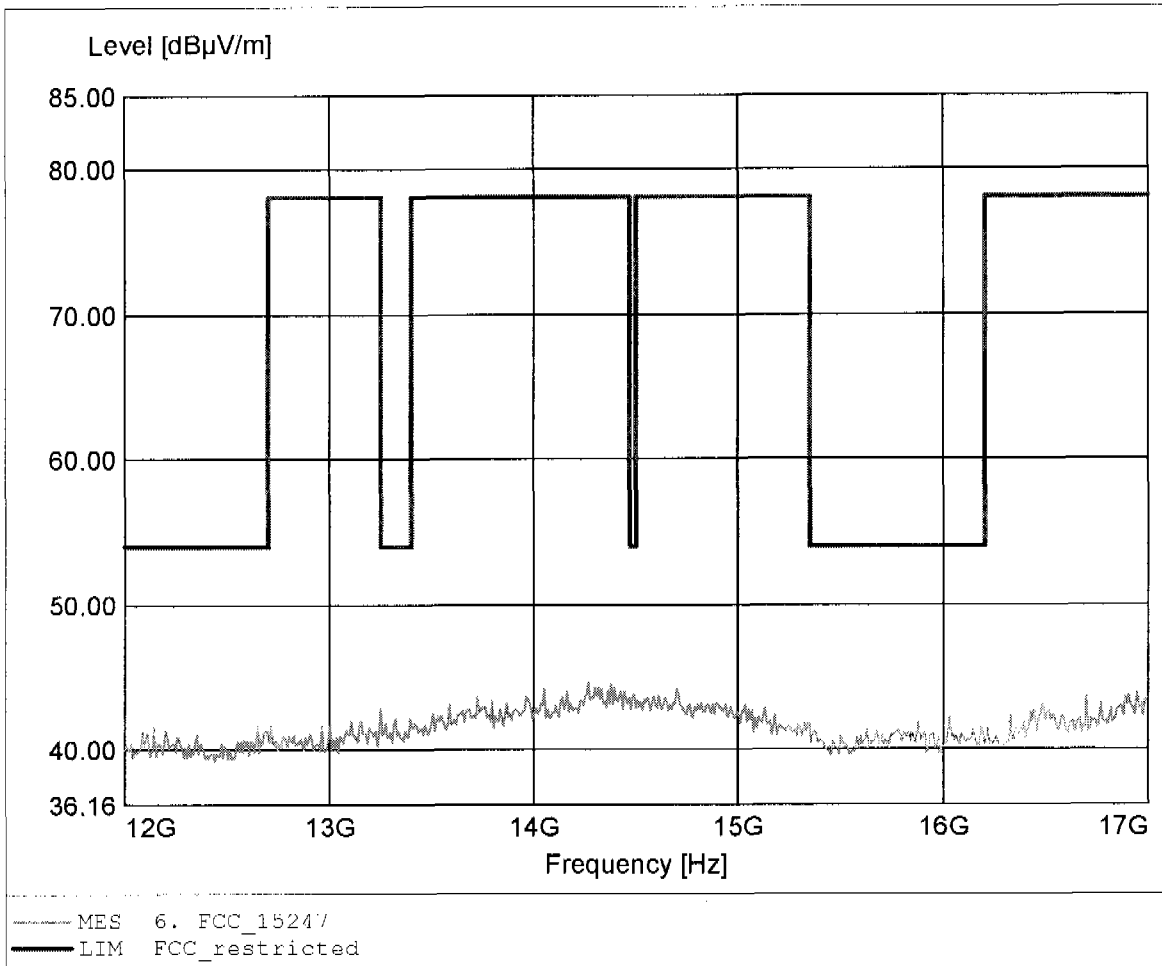

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2402 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.076GHz, Emax: 45.71dBµV/m, RBW: 1MHz

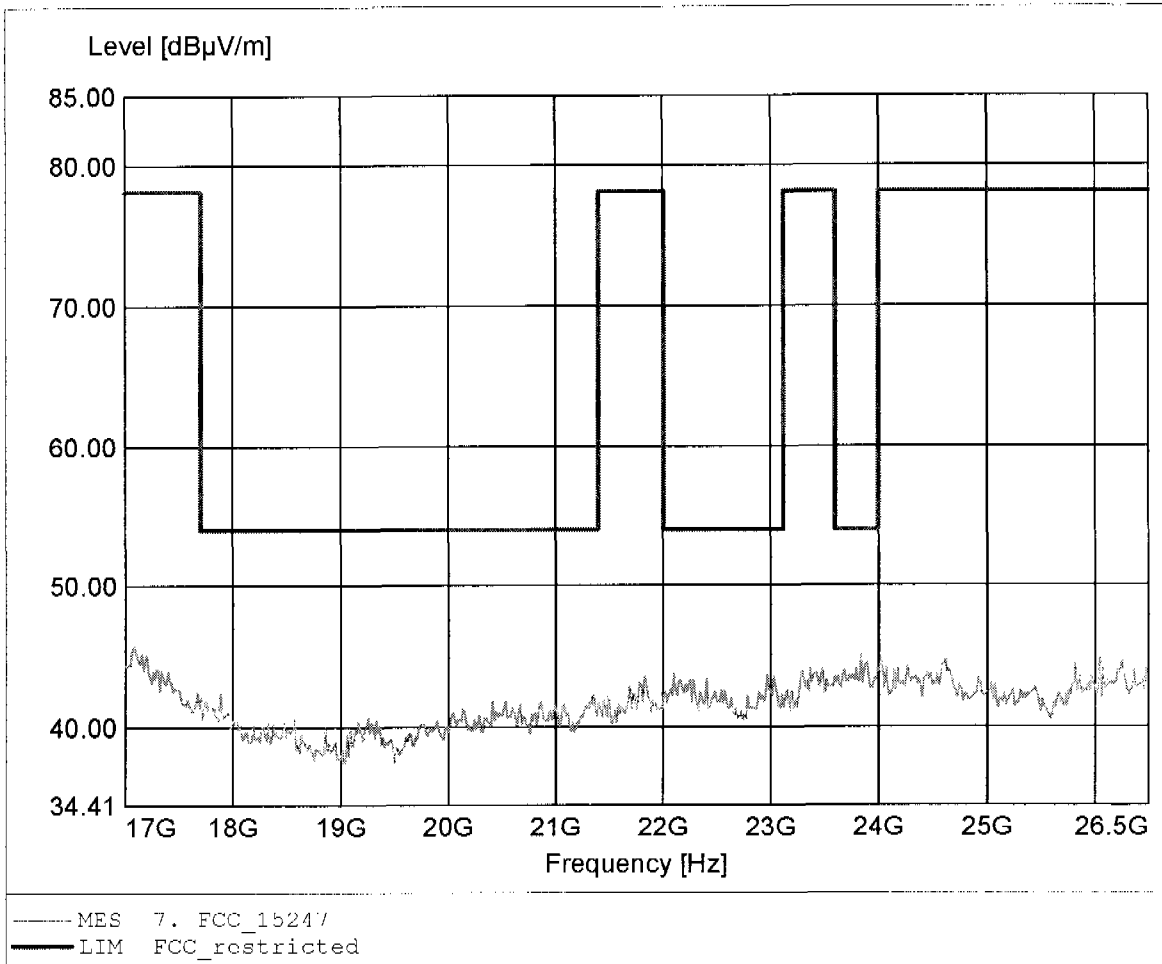

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2402 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 46.15dBµV/m, RBW: 1MHz

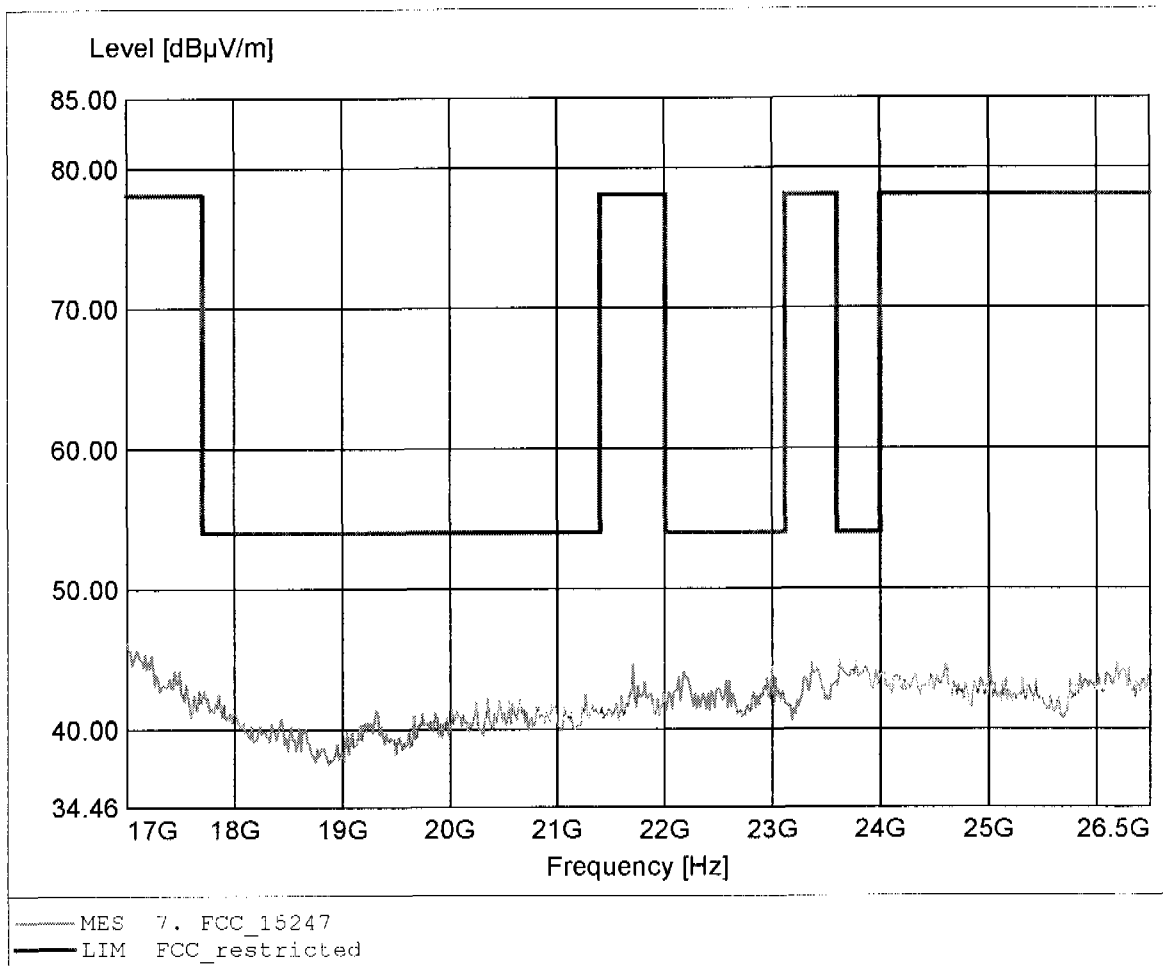

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2441 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 199.455MHz, Emax: 31.55dBµV/m, RBW: 100kHz

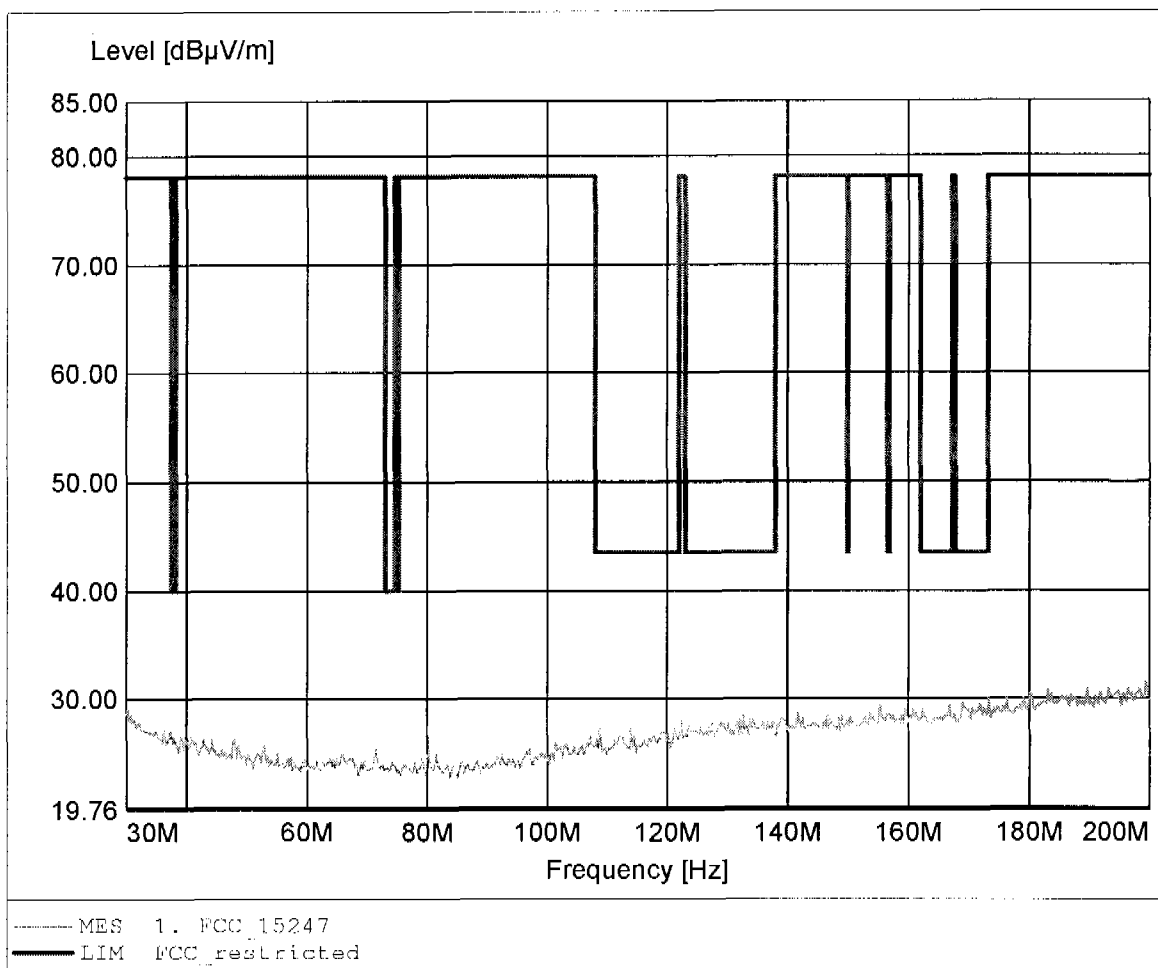

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2441 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 198.910MHz, Emax: 30.68dBµV/m, RBW: 100kHz

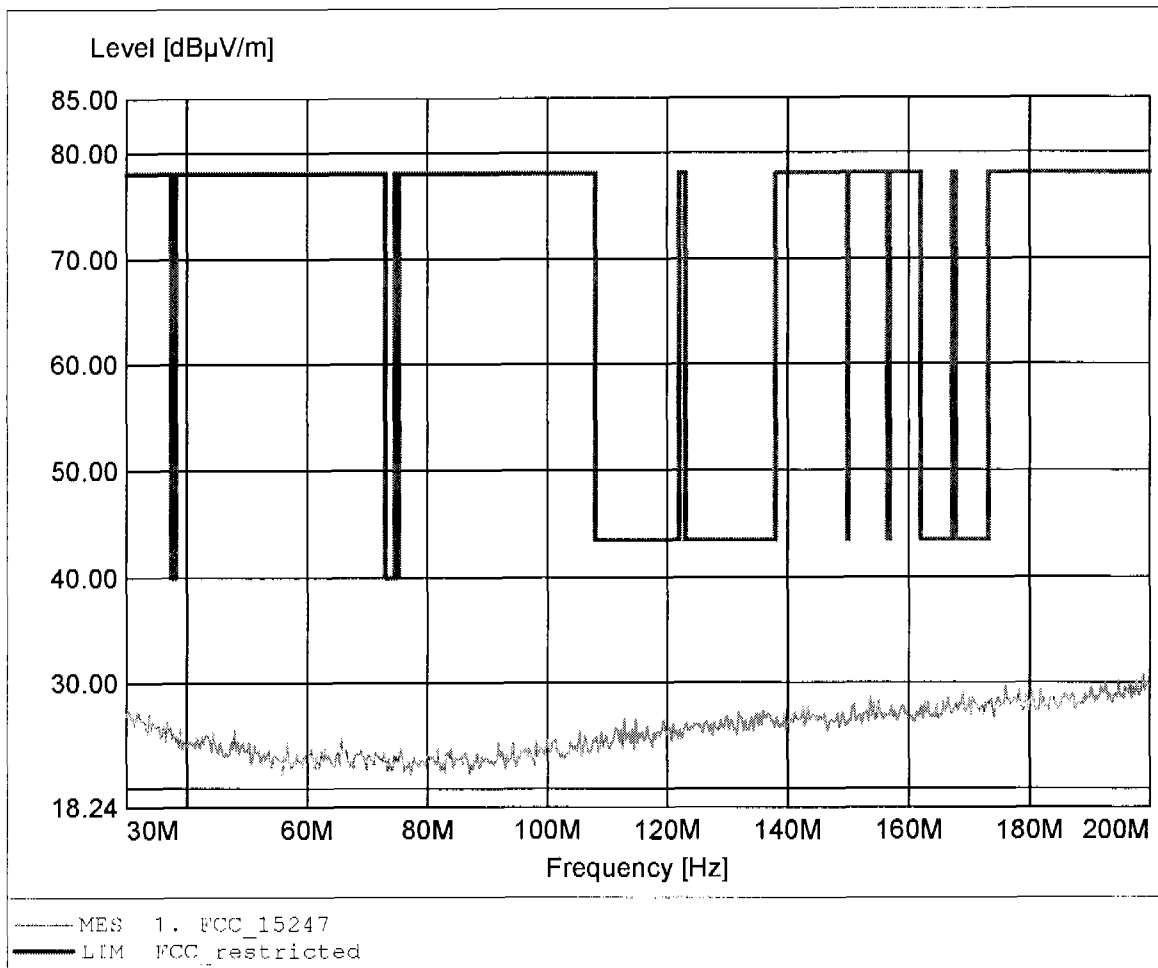

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2441 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 357.692MHz, Emax: 30.65dBµV/m, RBW: 100kHz

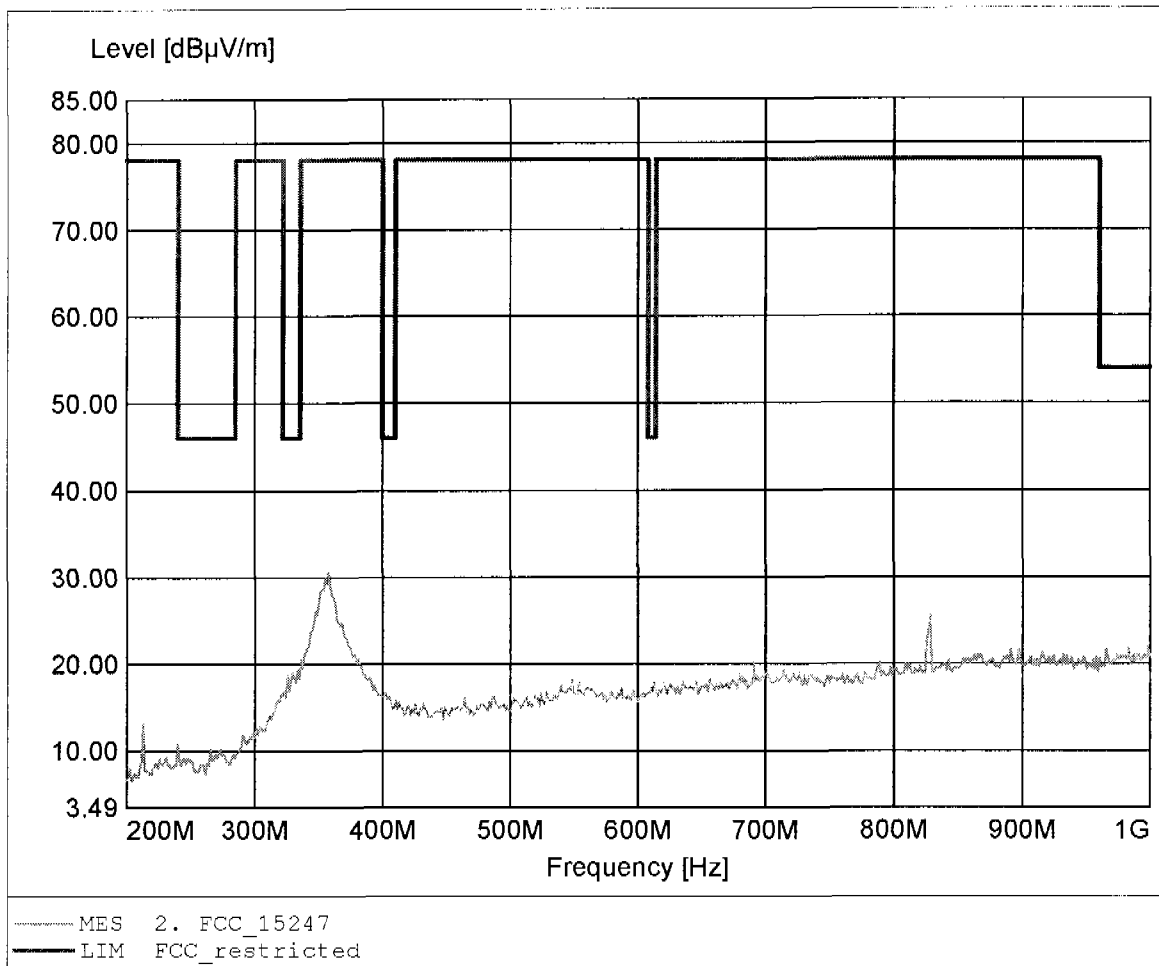

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2441 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 815.385MHz, Emax: 29.42dBµV/m, RBW: 100kHz

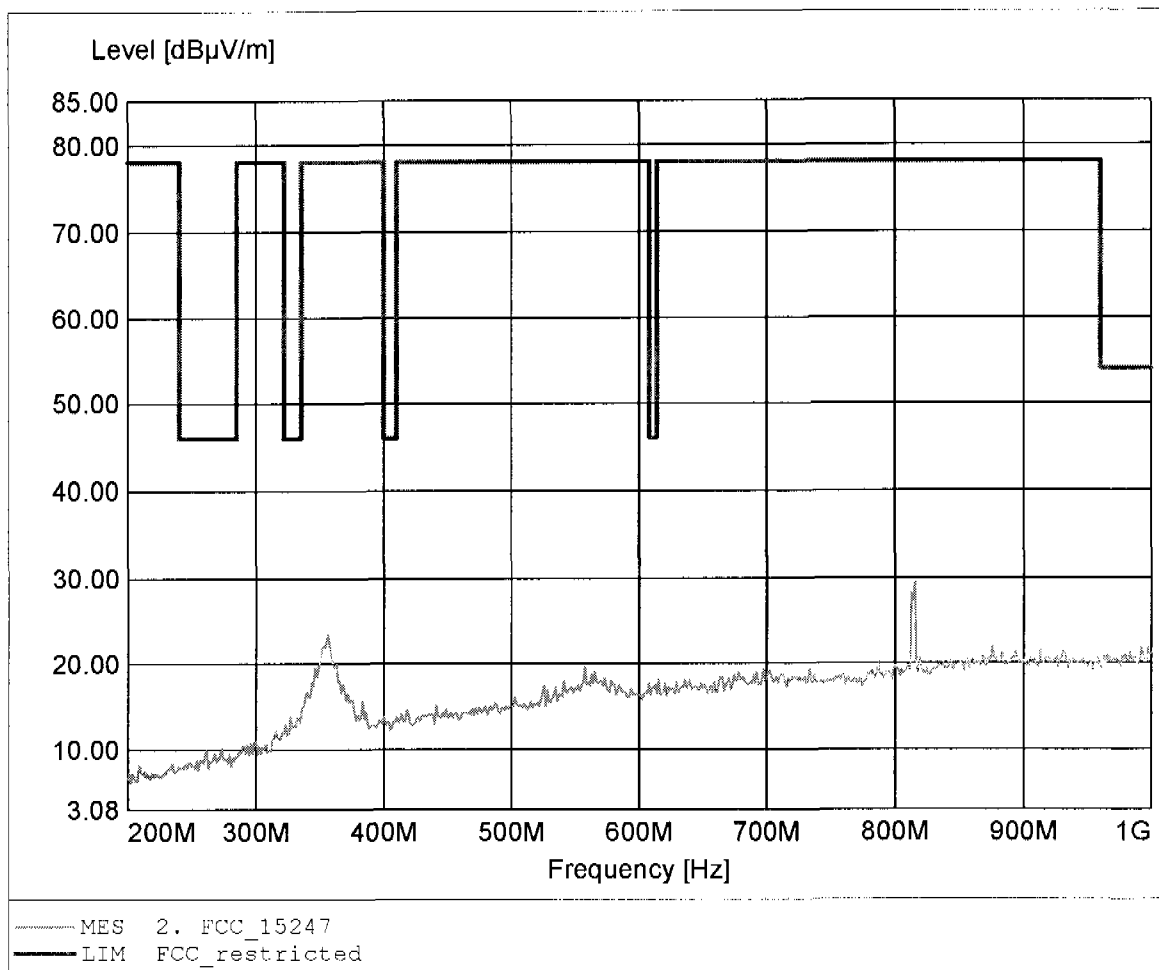

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2441 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.215GHz, Emax: 40.81dBµV/m, RBW: 1MHz

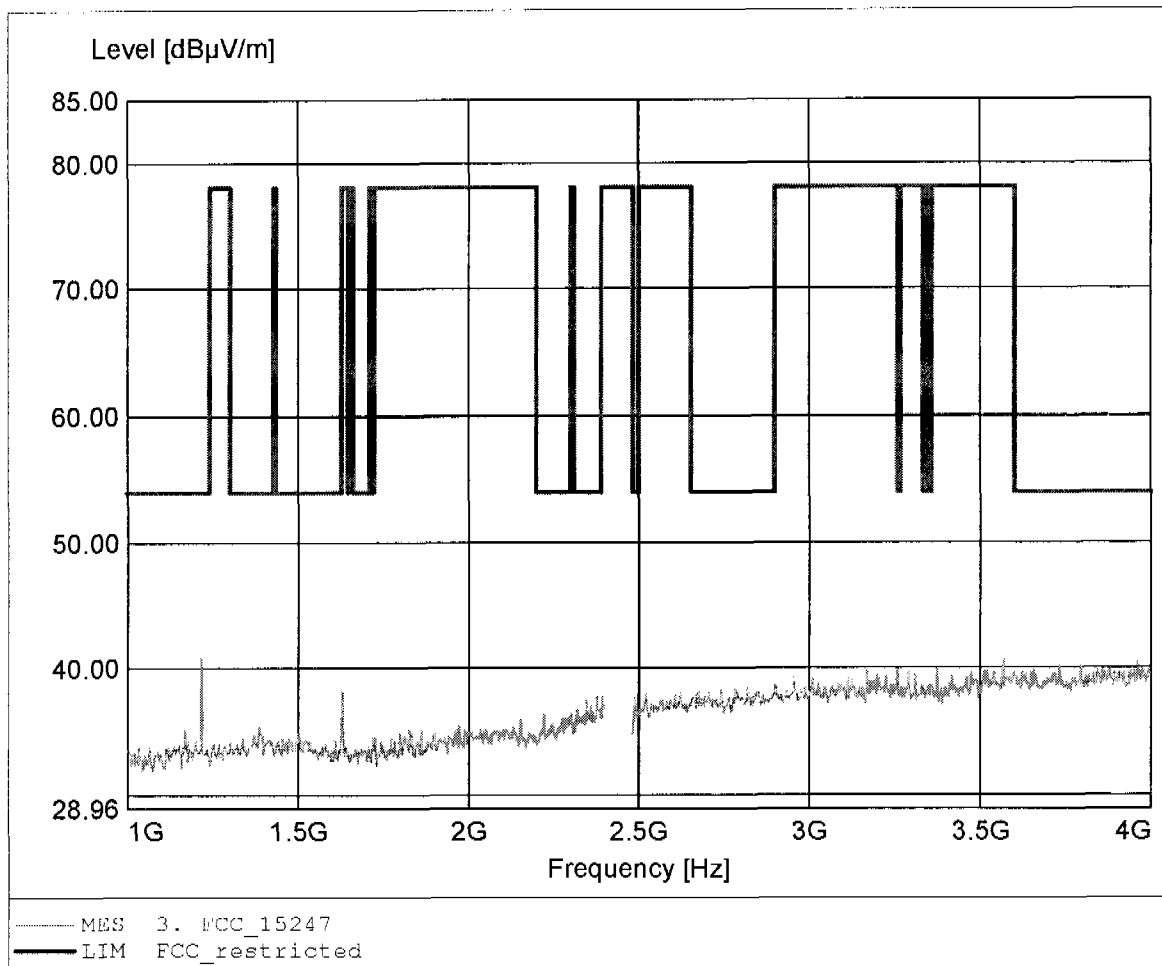

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2441 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.628GHz, Emax: 41.78dBµV/m, RBW: 1MHz

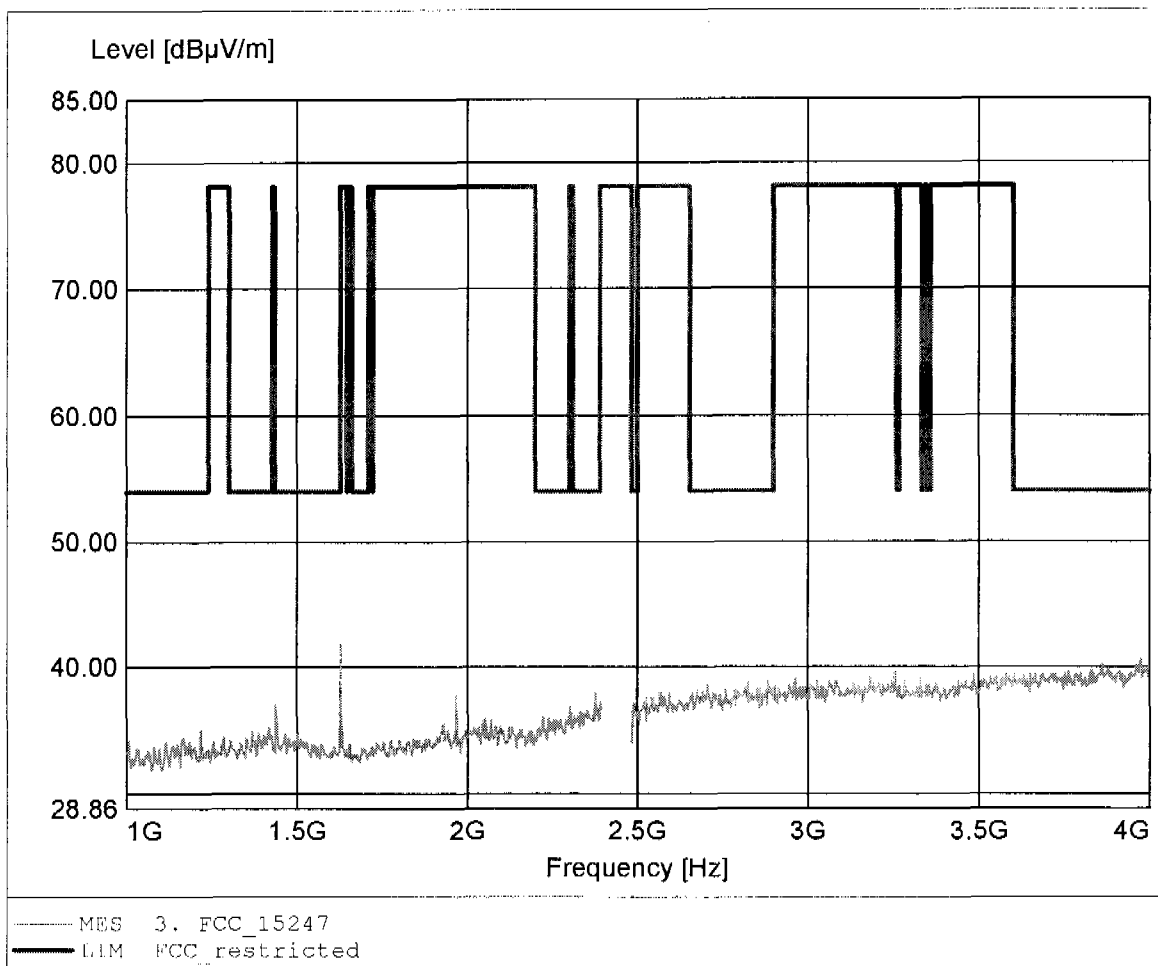

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2441 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.878GHz, Emax: 41.09dBuV/m, REW: 1MHz

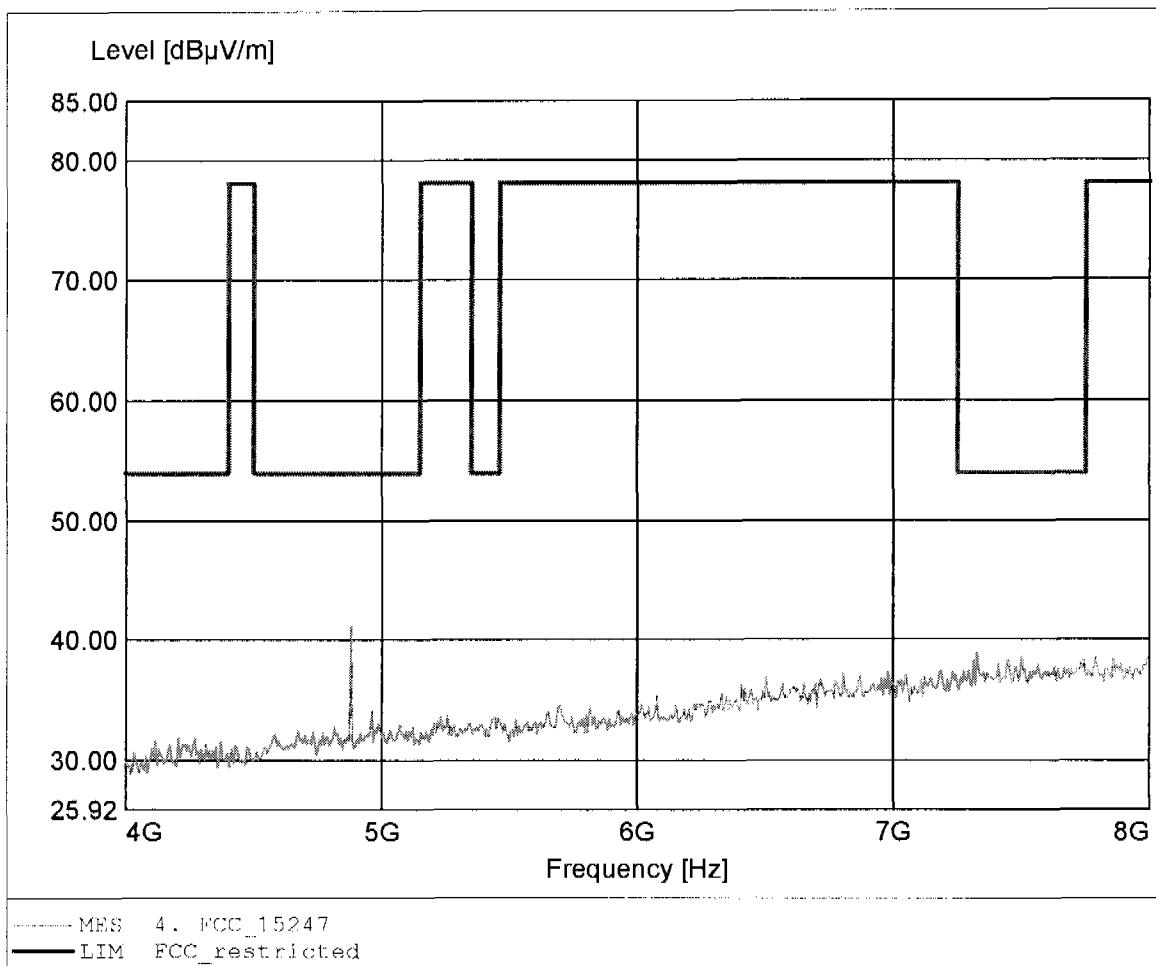

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2441 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.878GHz, Emax: 46.03dBµV/m, RBW: 1MHz

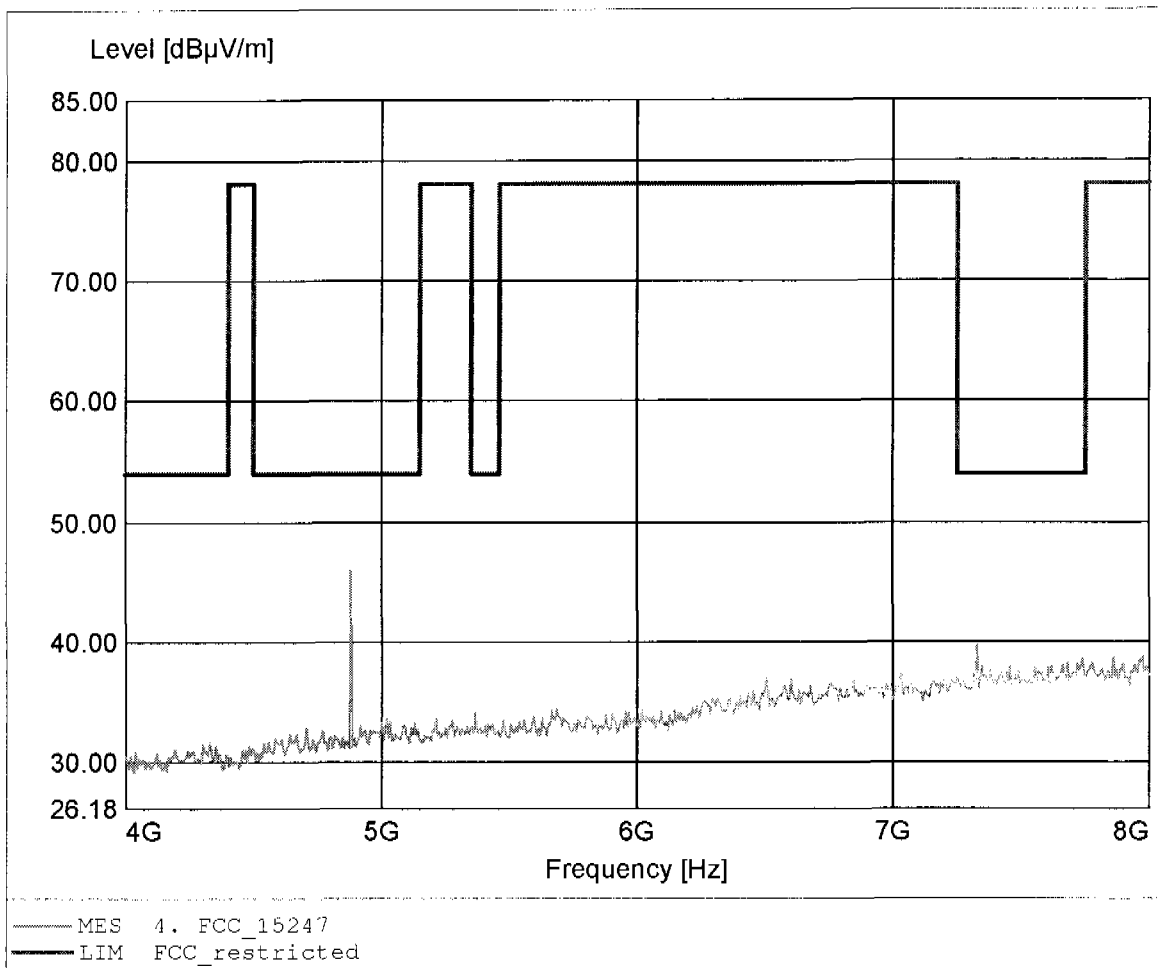

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2441 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.763GHz, Emax: 47.89dBµV/m, REW: 1MHz

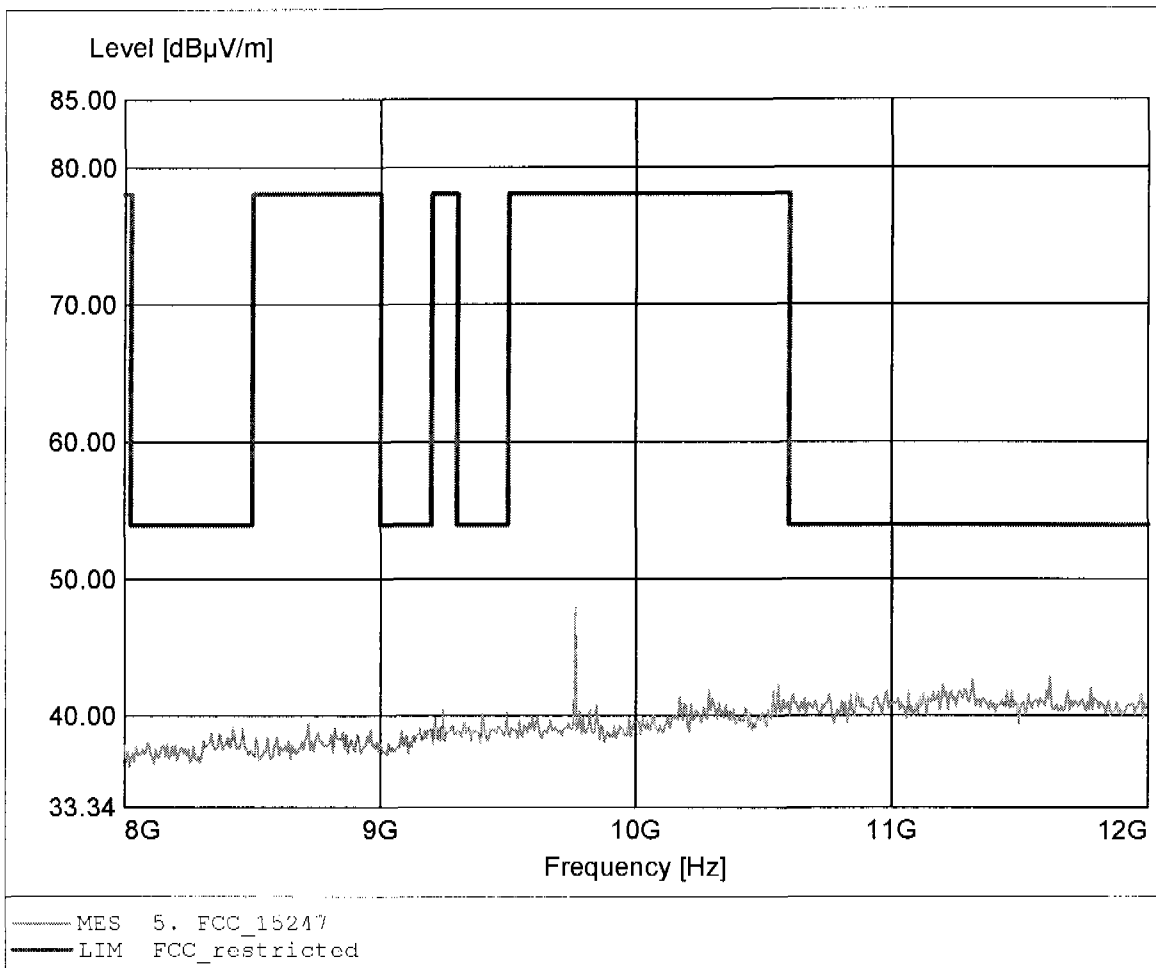

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2441 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.763GHz, Emax: 44.57dBµV/m, REW: 1MHz

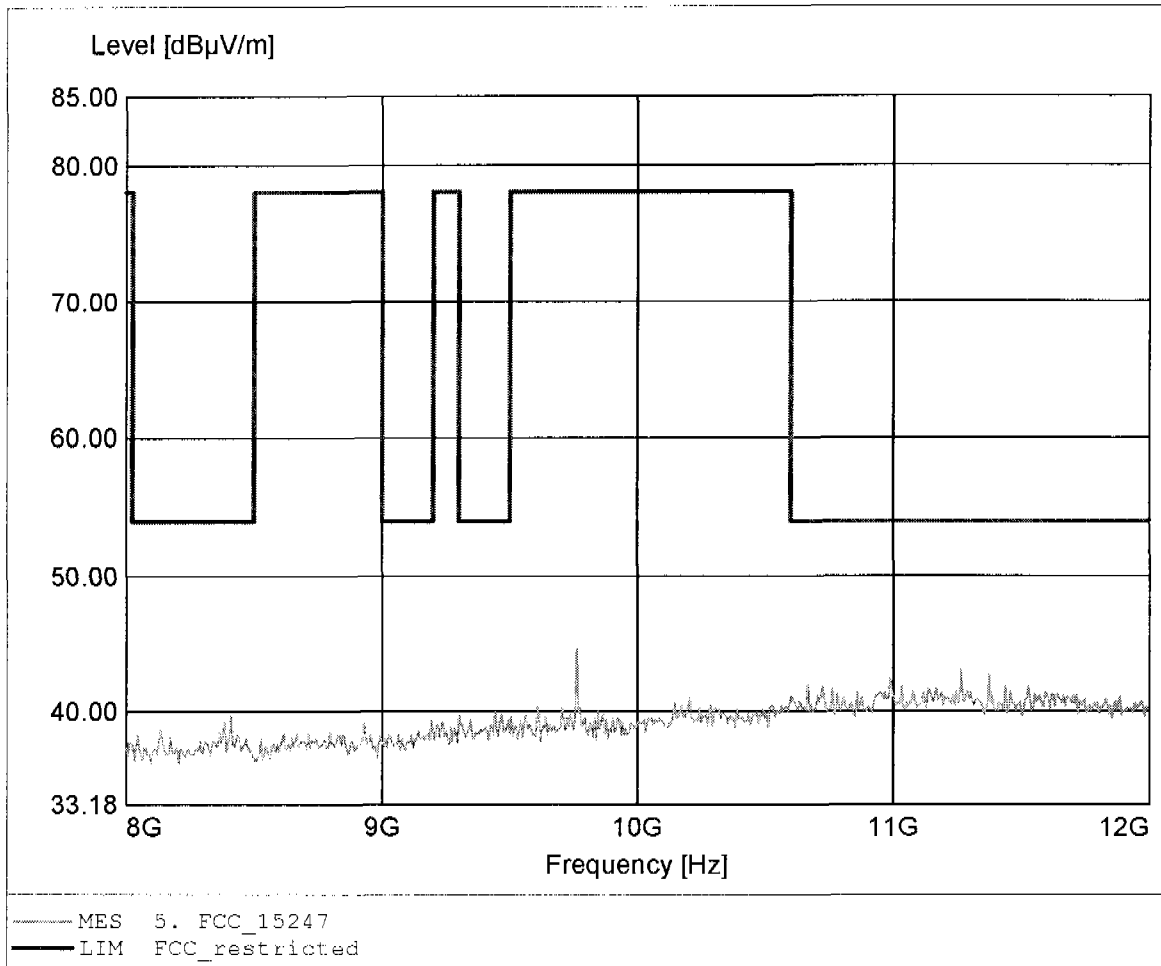

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2441 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.404GHz, Emax: 44.80dBuV/m, RBW: 1MHz

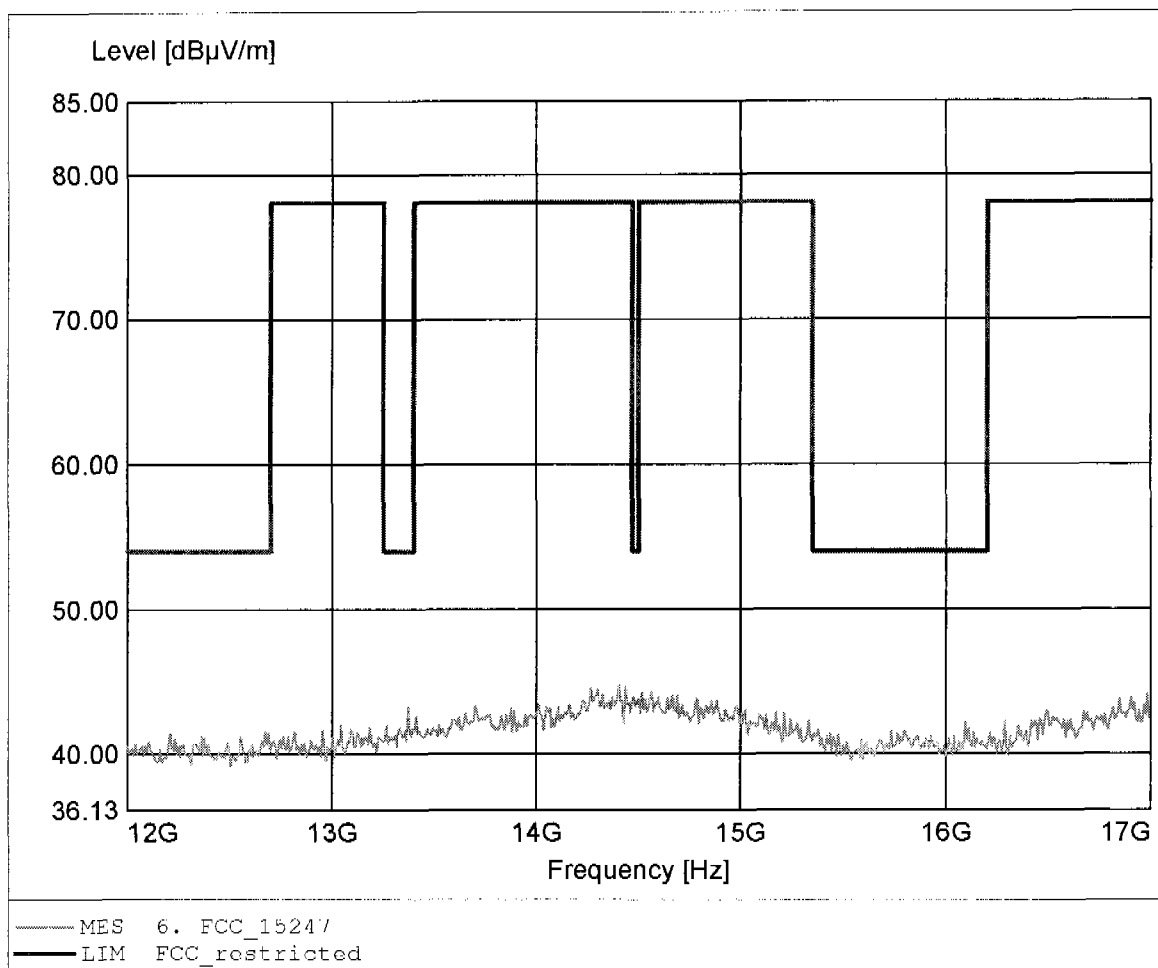

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2441 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.332GHz, Emax: 44.98dBµV/m, RBW: 1MHz

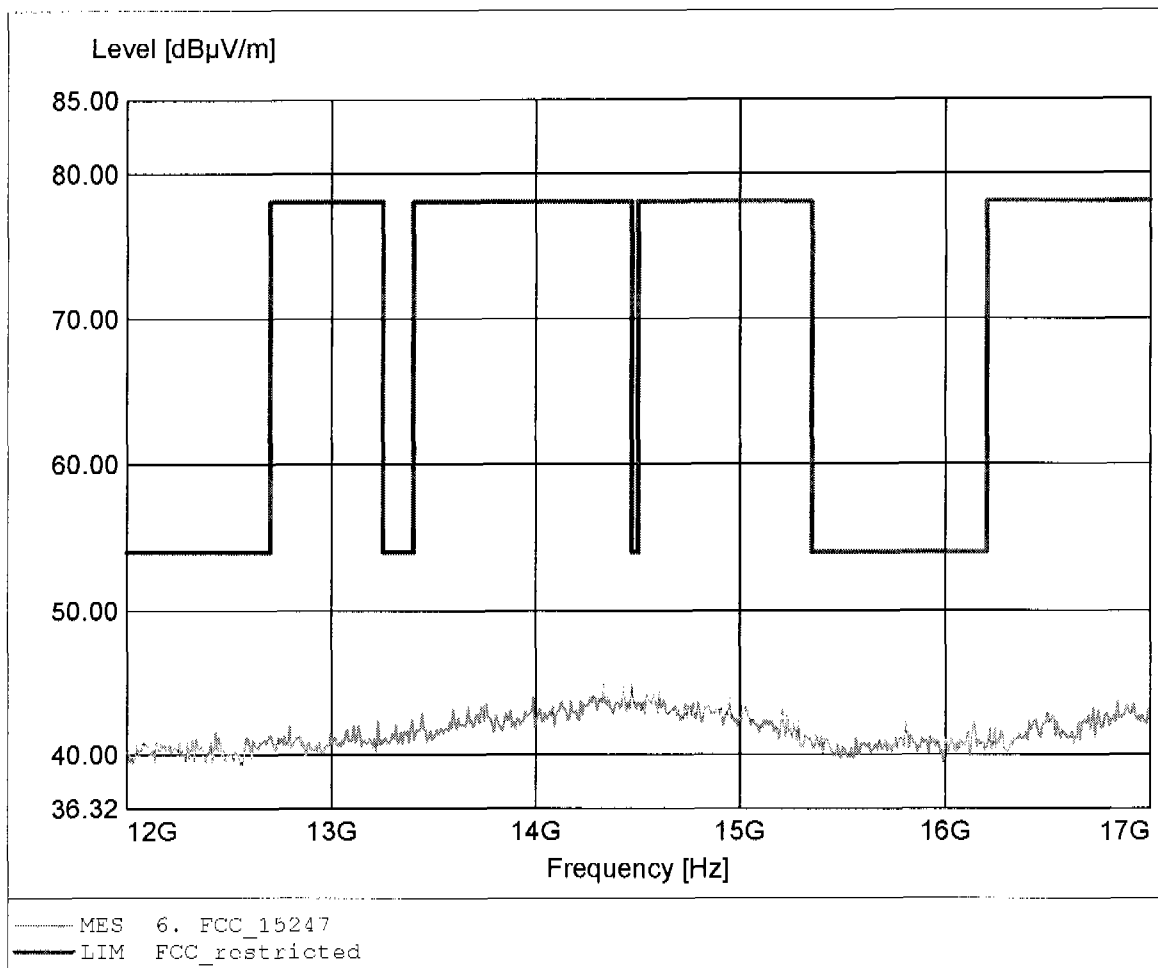

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2441 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.046GHz, Emax: 45.98dBµV/m, RBW: 1MHz

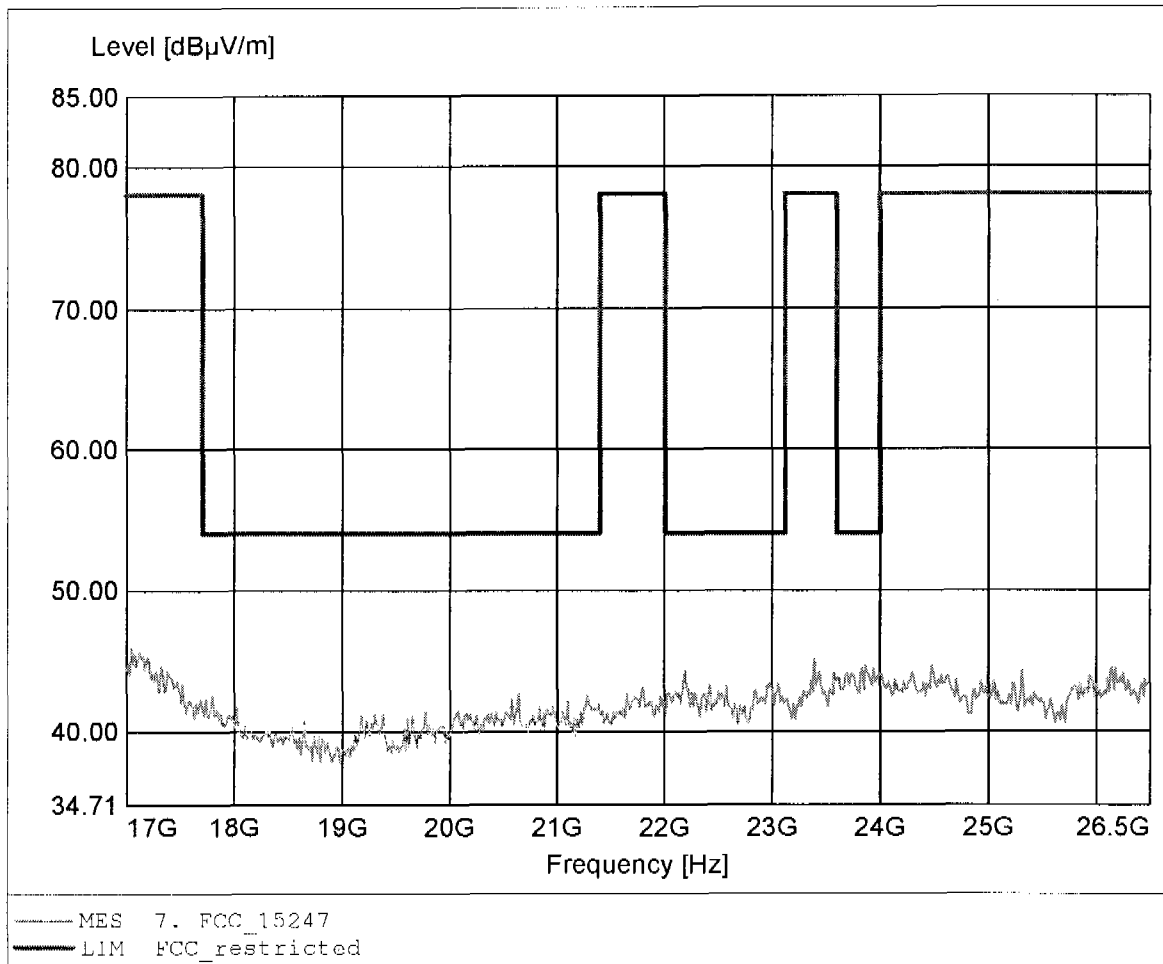

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2441 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.122GHz, Emax: 45.96dBµV/m, RBW: 1MHz

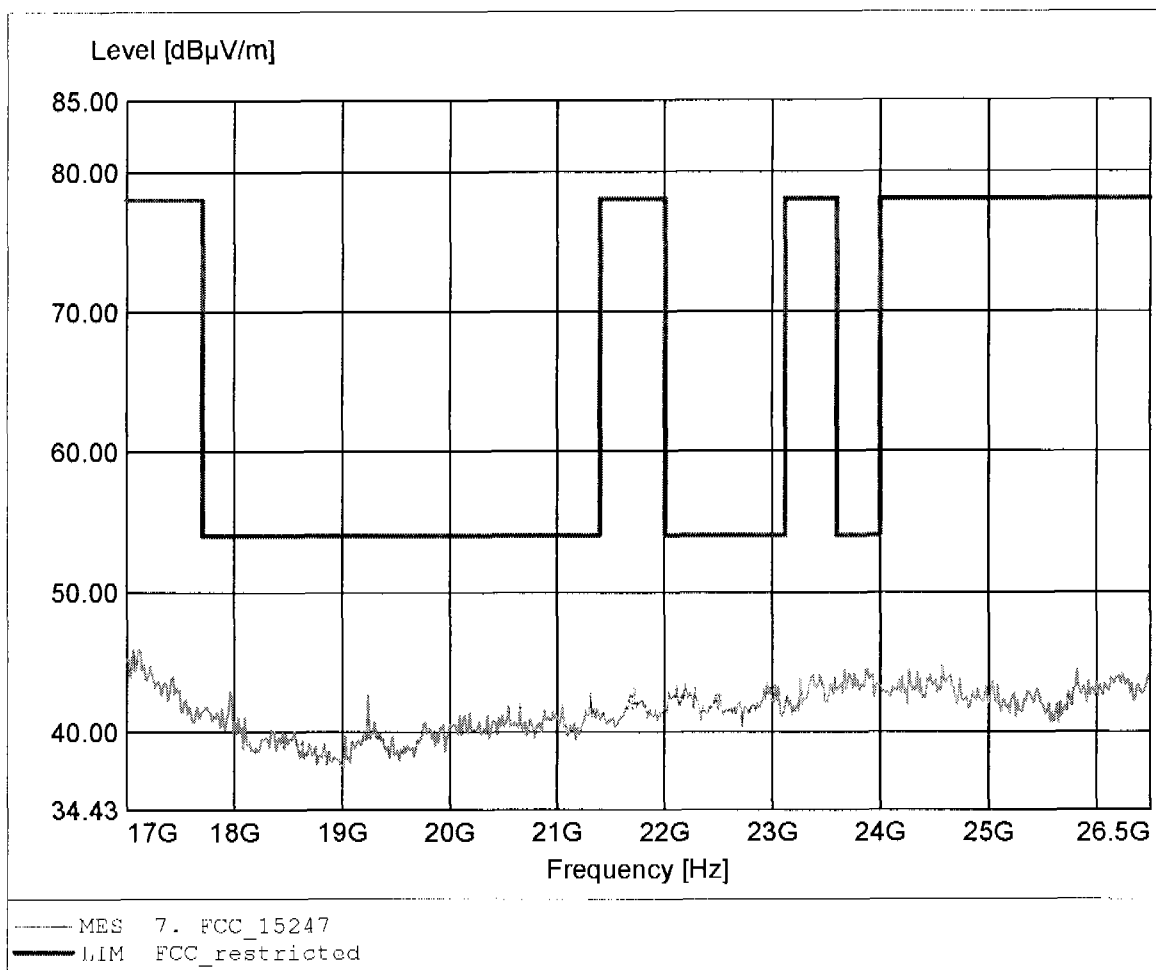

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2480 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 195.369MHz, Emax: 30.97dBµV/m, RBW: 100kHz

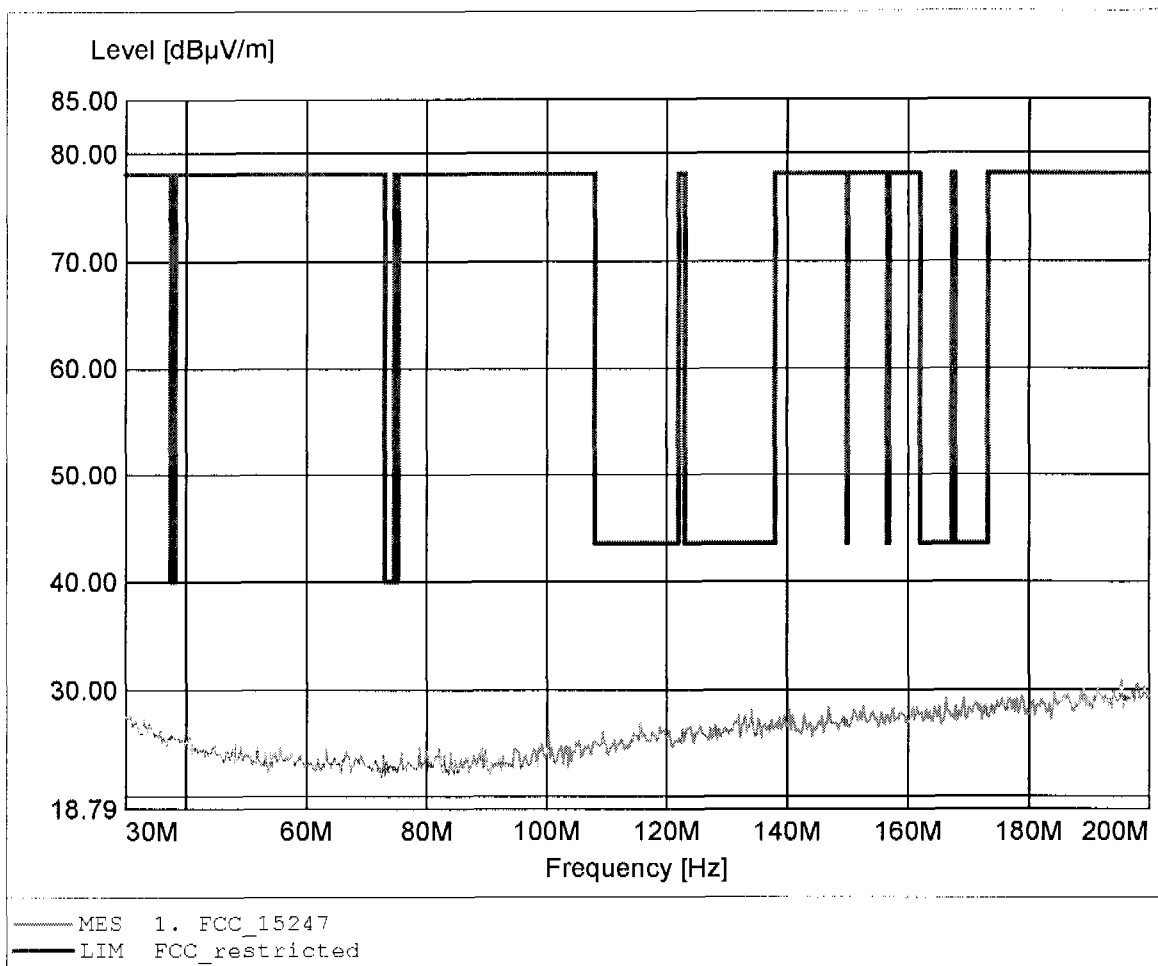

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2480 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 167.308MHz, Emax: 30.44dBµV/m, RBW: 100kHz

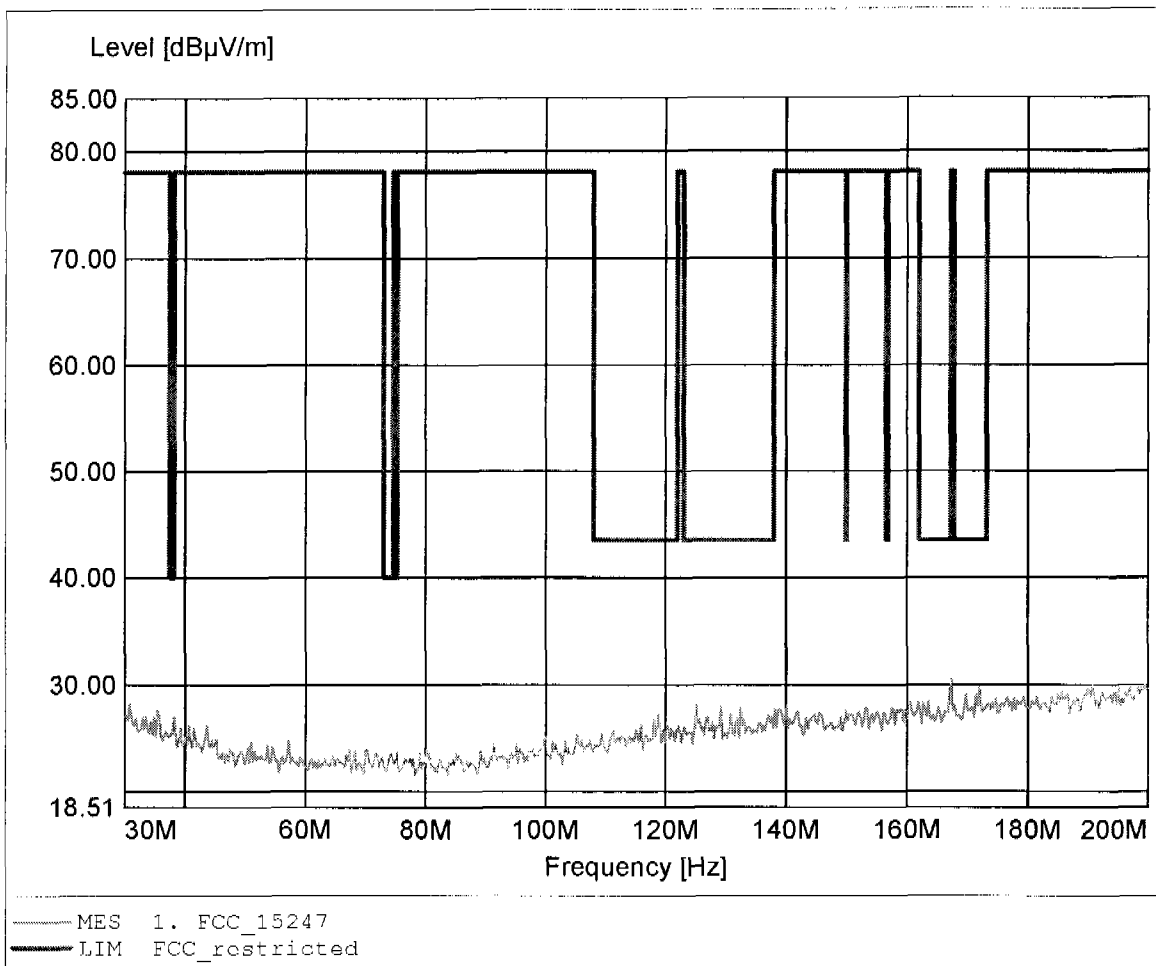

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2480 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 355.128MHz, Emax: 29.69dBµV/m, RBW: 100kHz

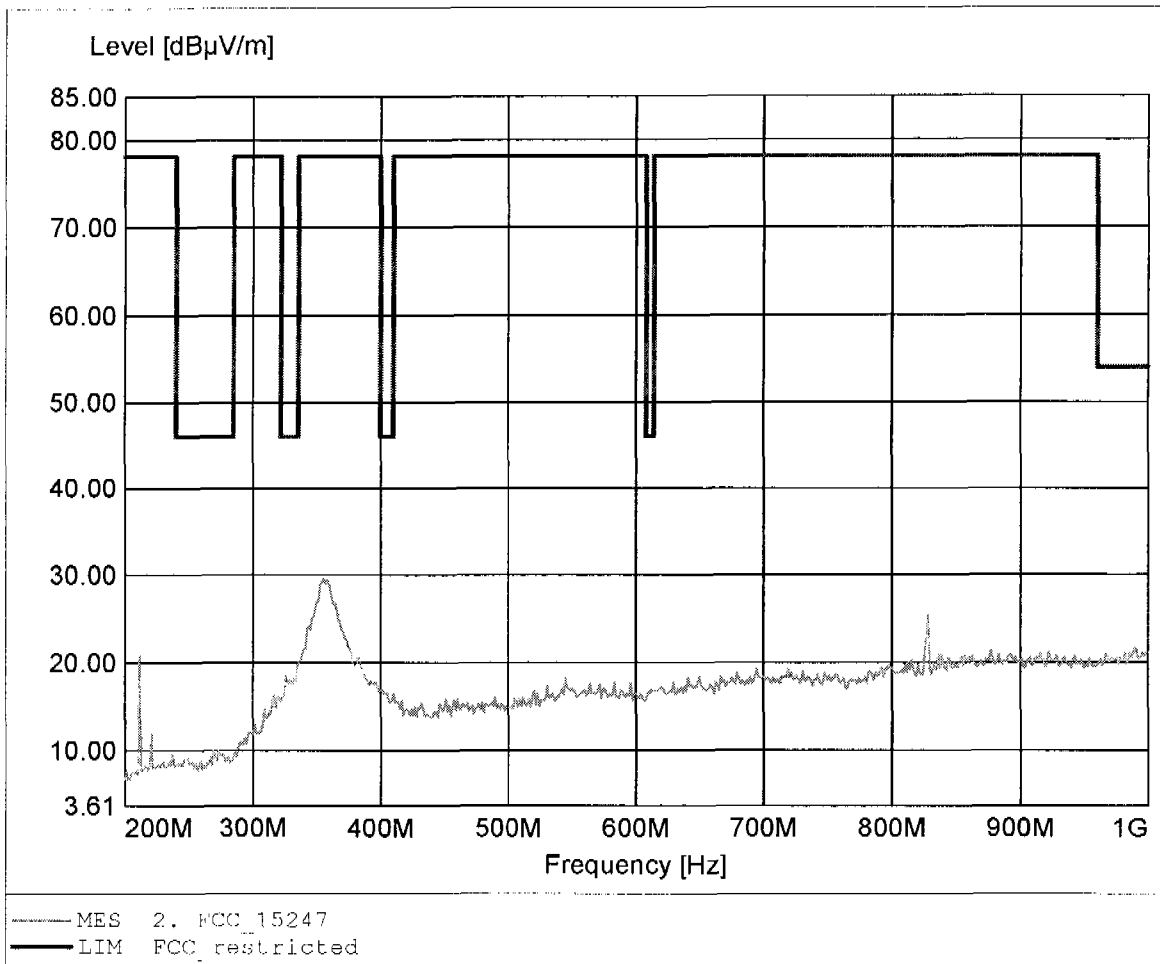

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2480 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 828.205MHz, Emax: 34.01dBµV/m, RBW: 100kHz

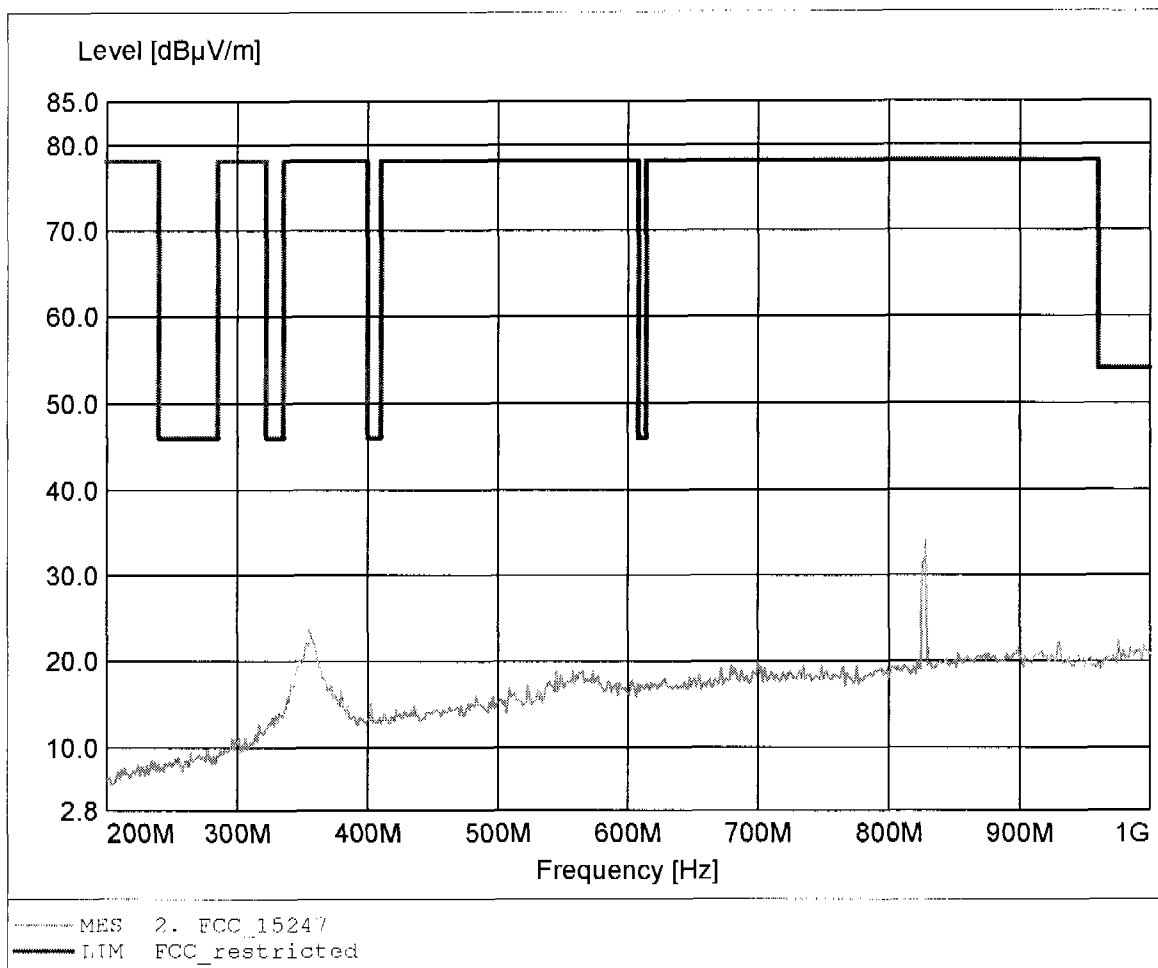

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2480 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.496GHz, Emax: 41.80dBµV/m, REW: 1MHz

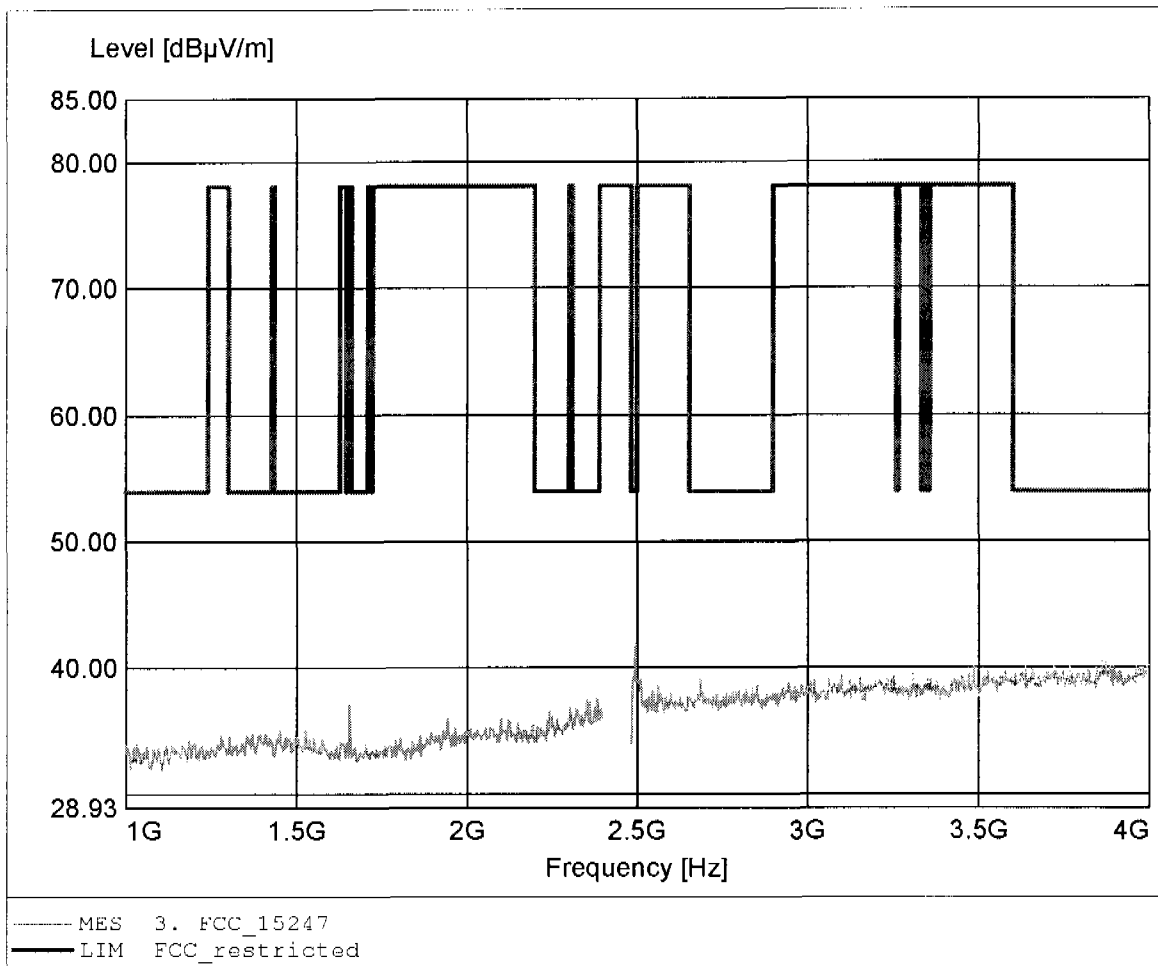

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2480 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.653GHz, Emax: 40.90dBµV/m, RBW: 1MHz

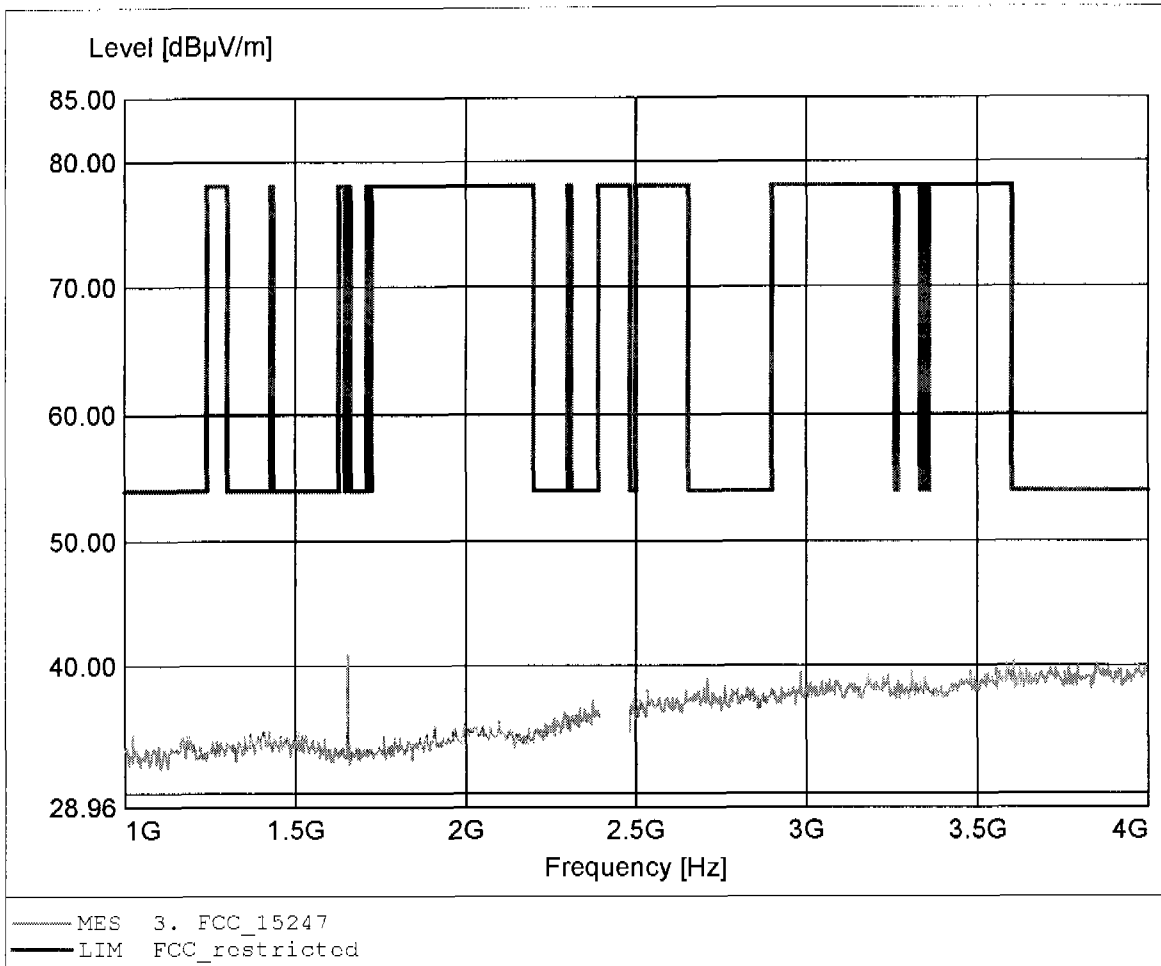

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2480 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.442GHz, Emax: 43.97dBµV/m, RBW: 1MHz

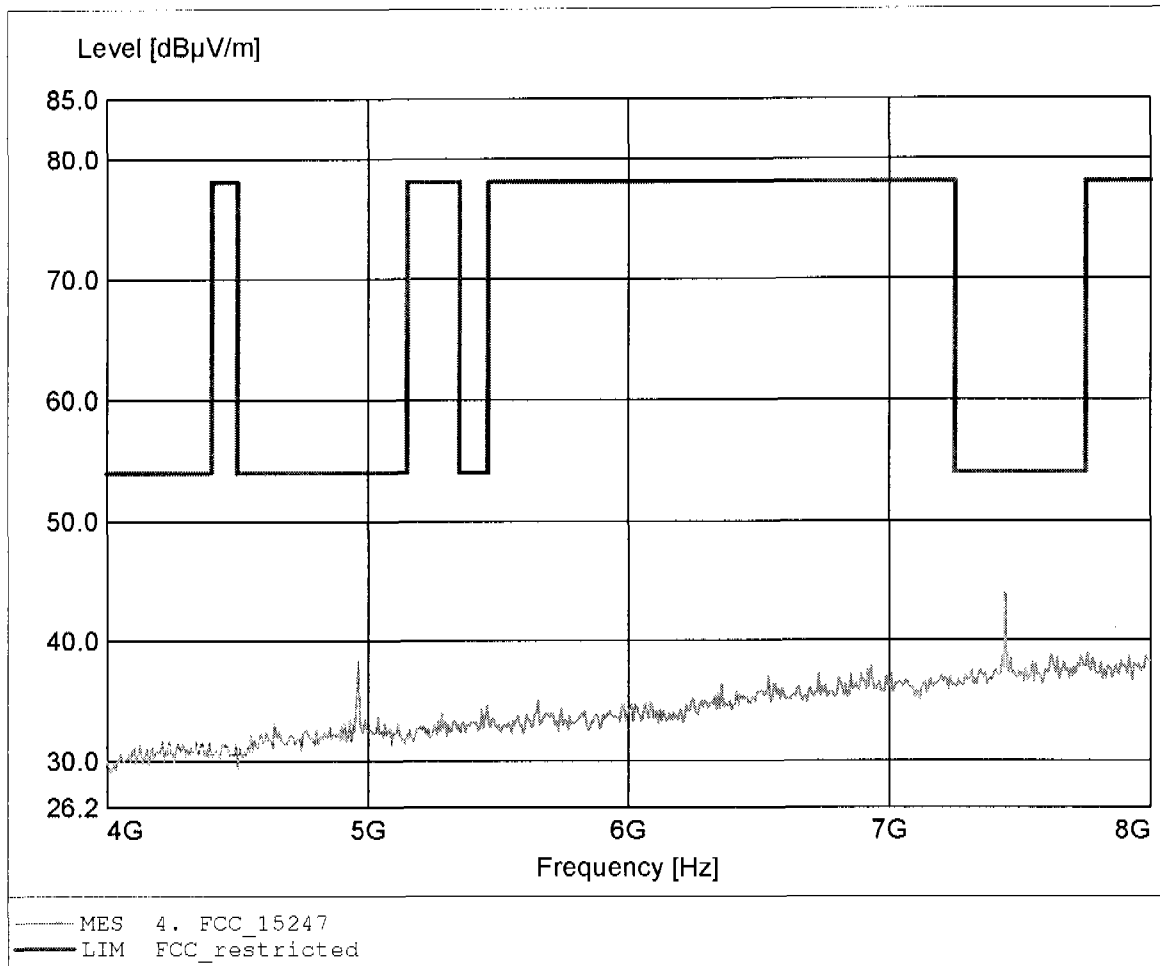

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2480 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.962GHz, Emax: 43.76dBµV/m, RBW: 1MHz

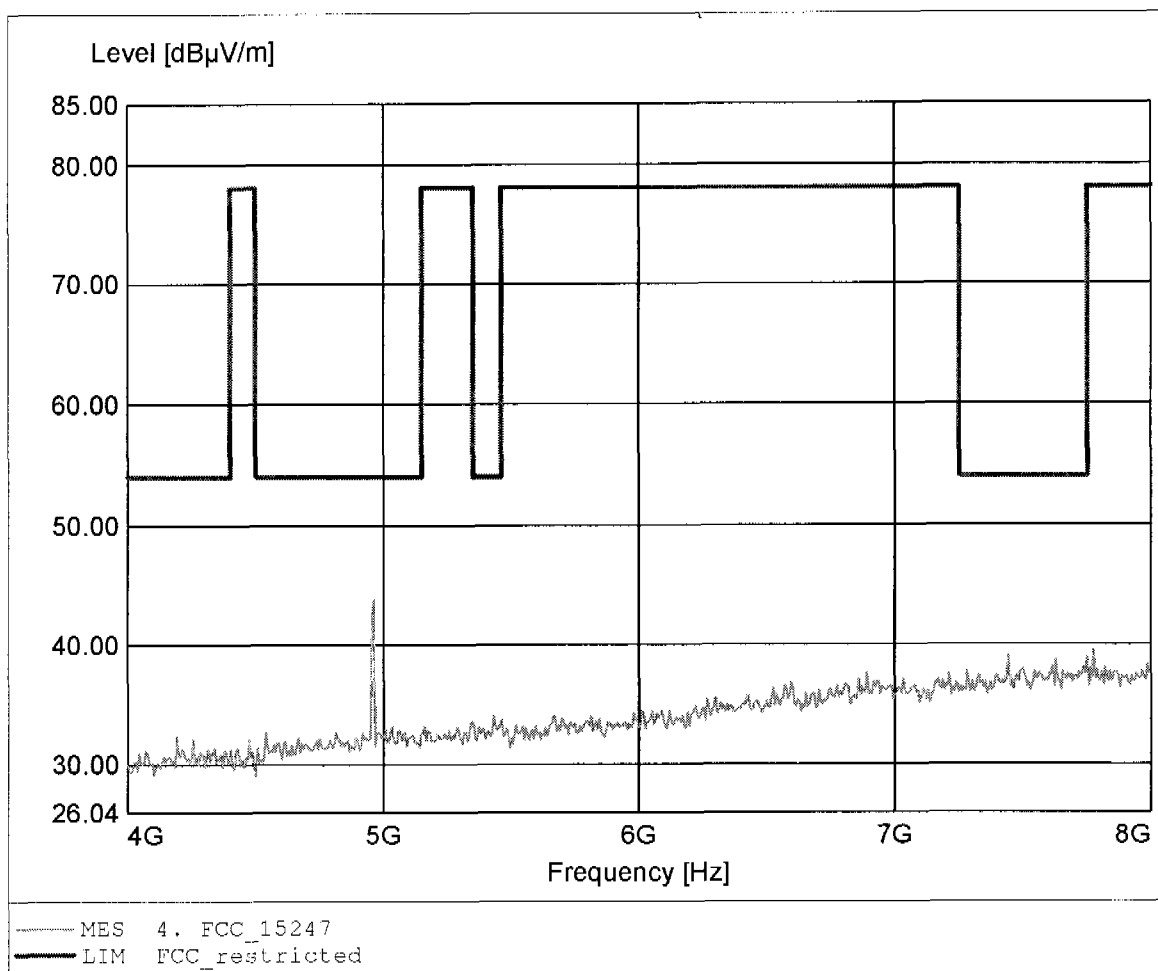

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2480 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.917GHz, Emax: 47.10dBµV/m, RBW: 1MHz

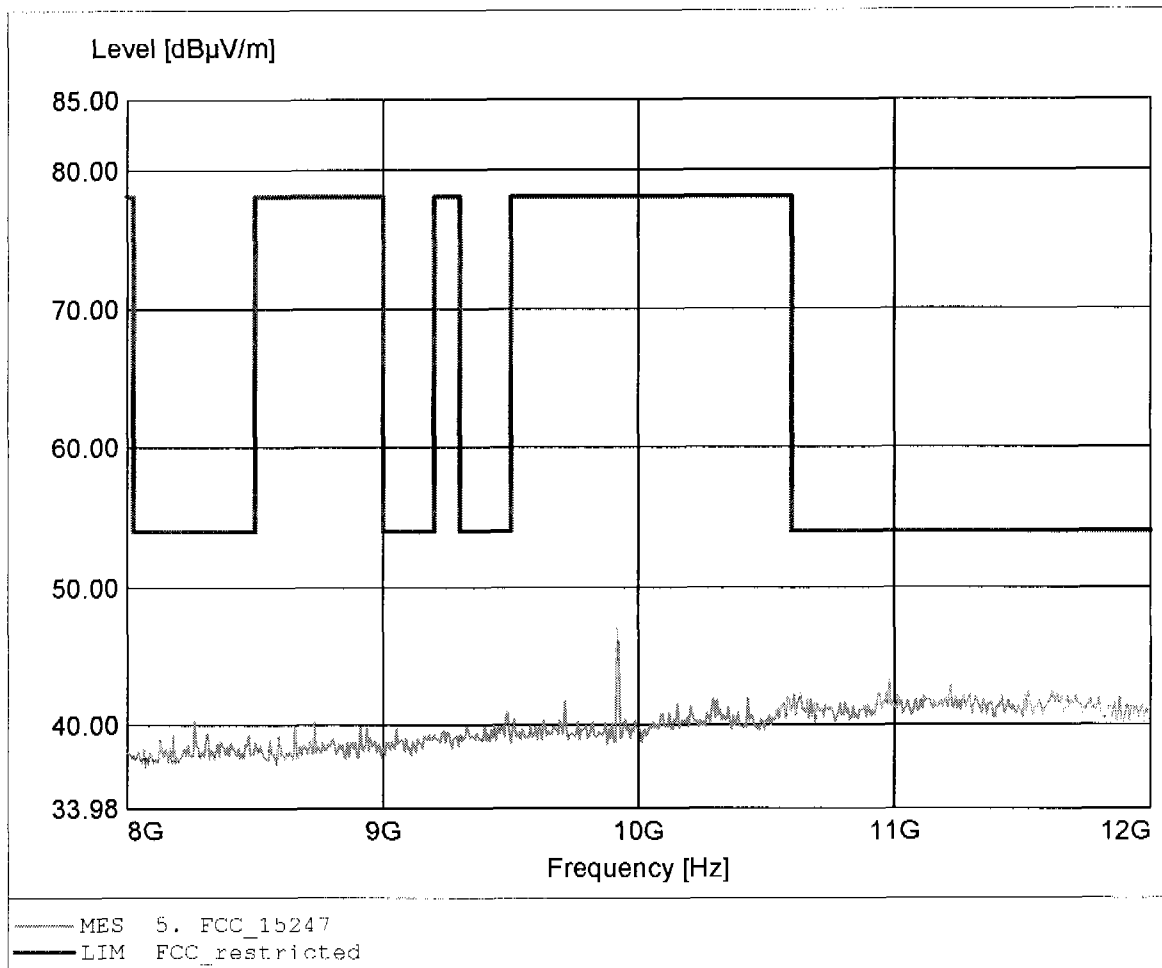

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2480 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.923GHz, Emax: 45.53dBµV/m, RBW: 1MHz

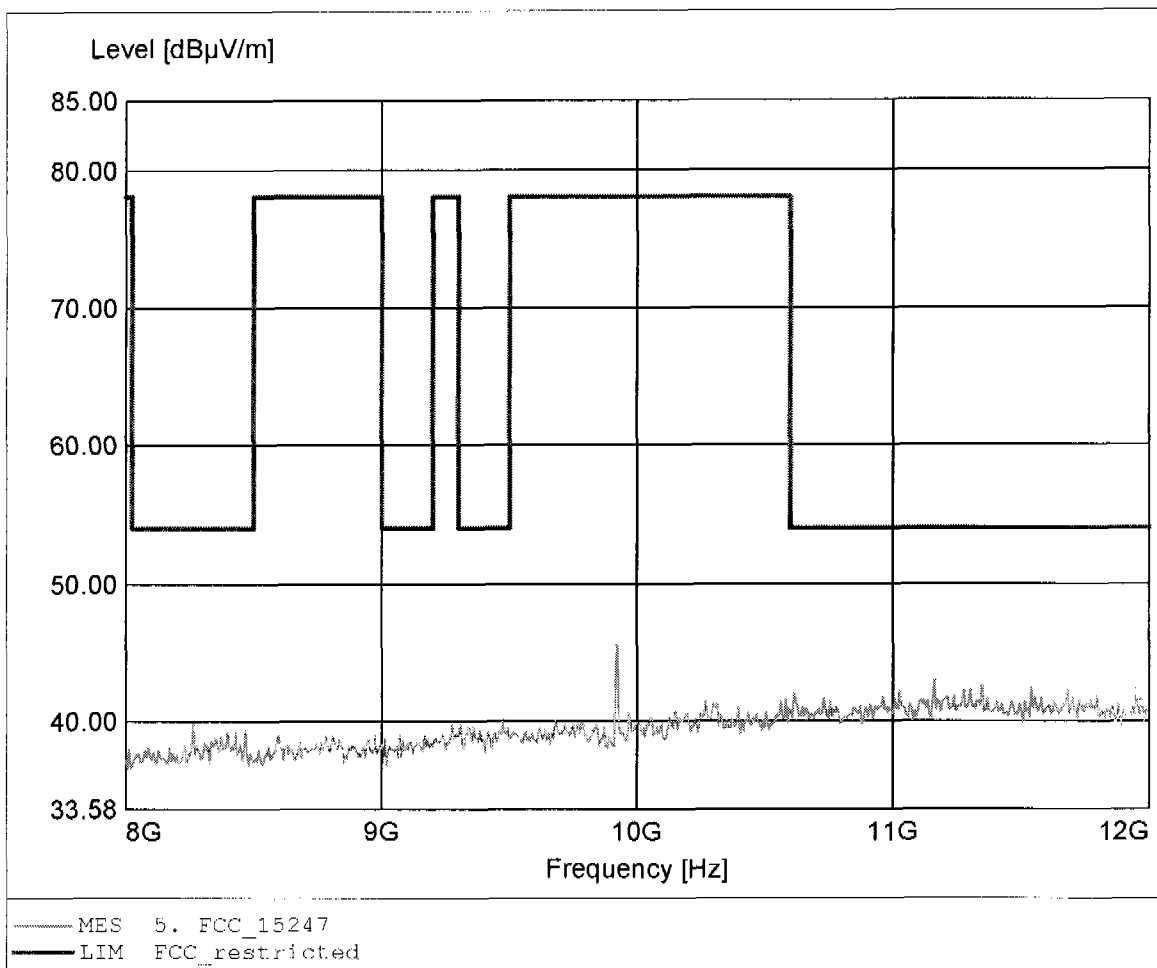

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2480 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.404GHz, Emax: 45.24dBµV/m, RBW: 1MHz

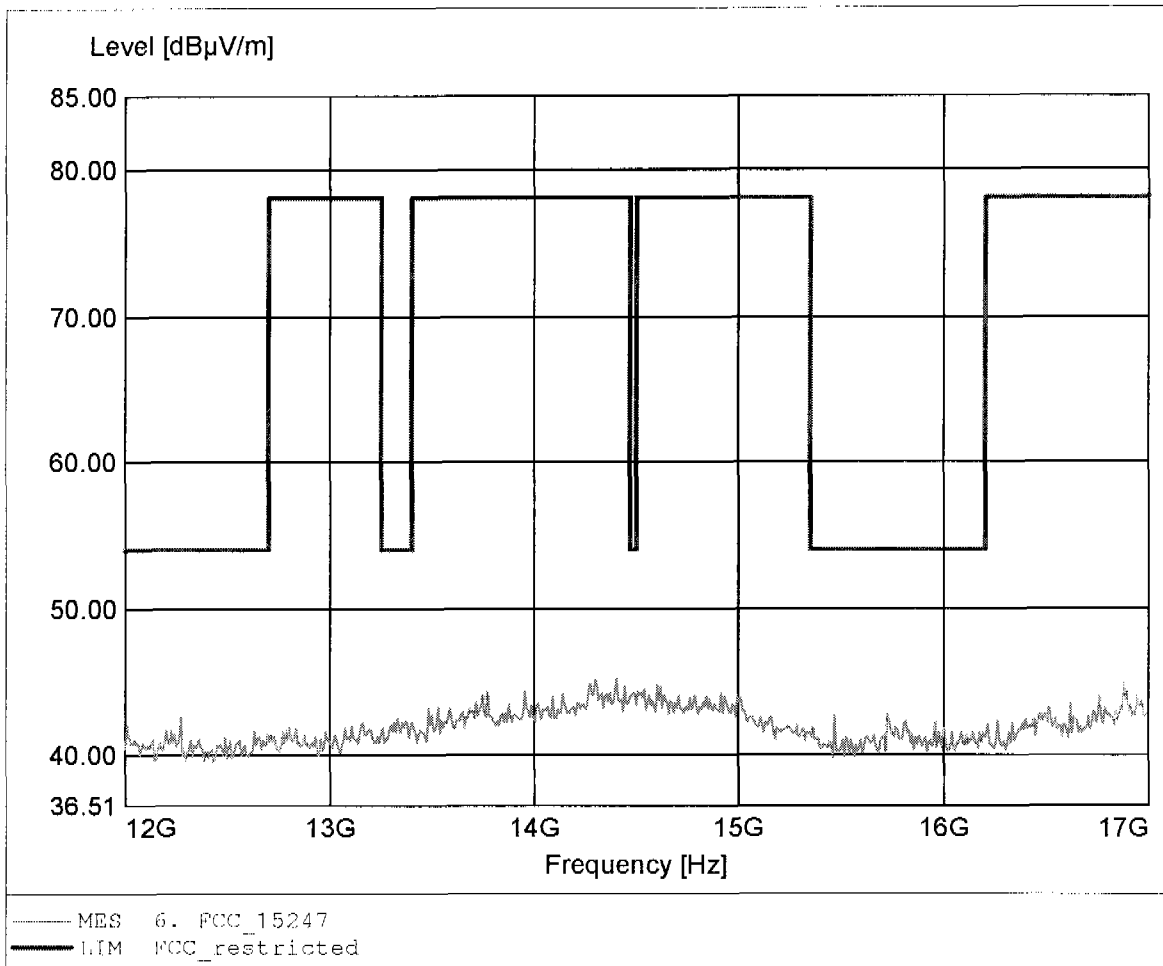

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2480 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.404GHz, Emax: 45.25dBµV/m, RBW: 1MHz

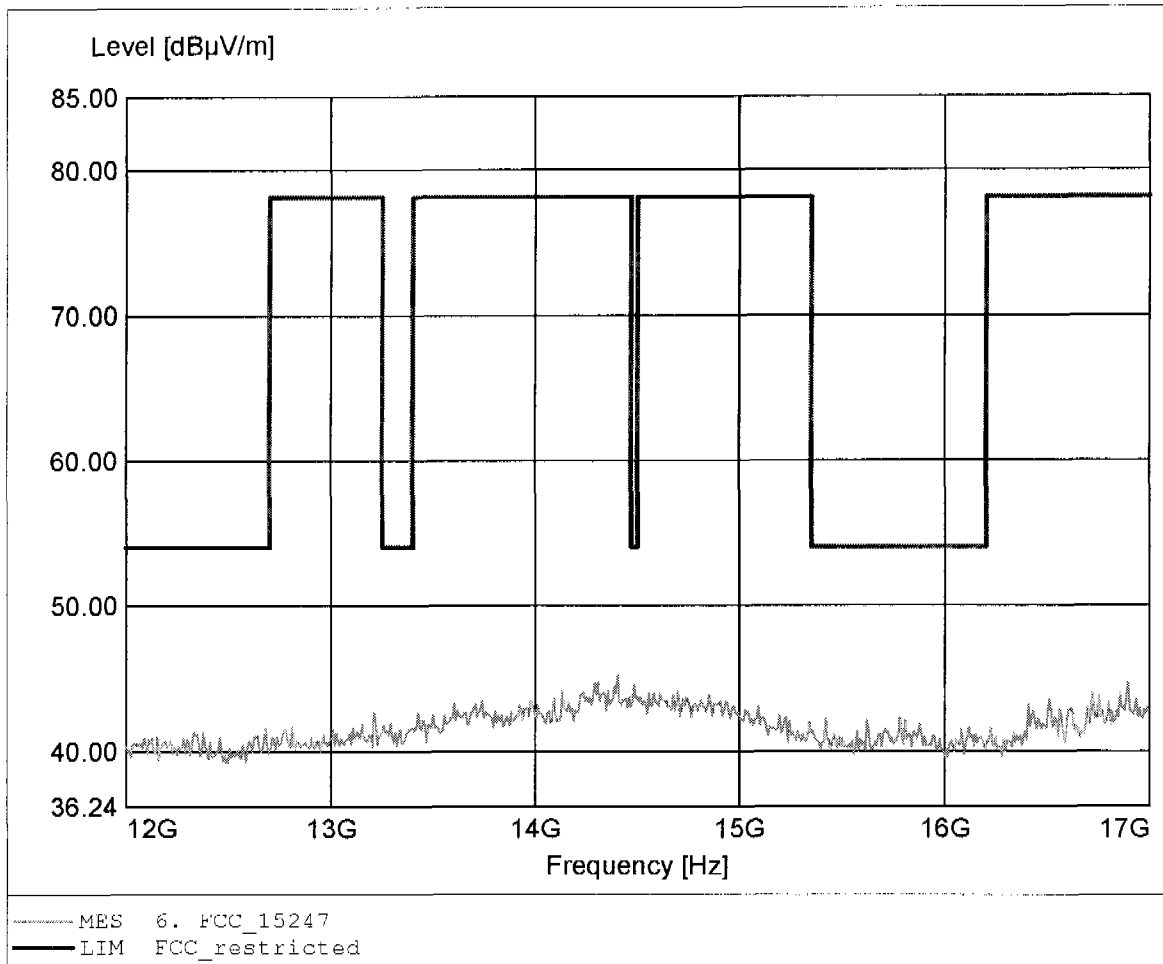

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2480 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.107GHz, Emax: 46.70dBµV/m, RBW: 1MHz

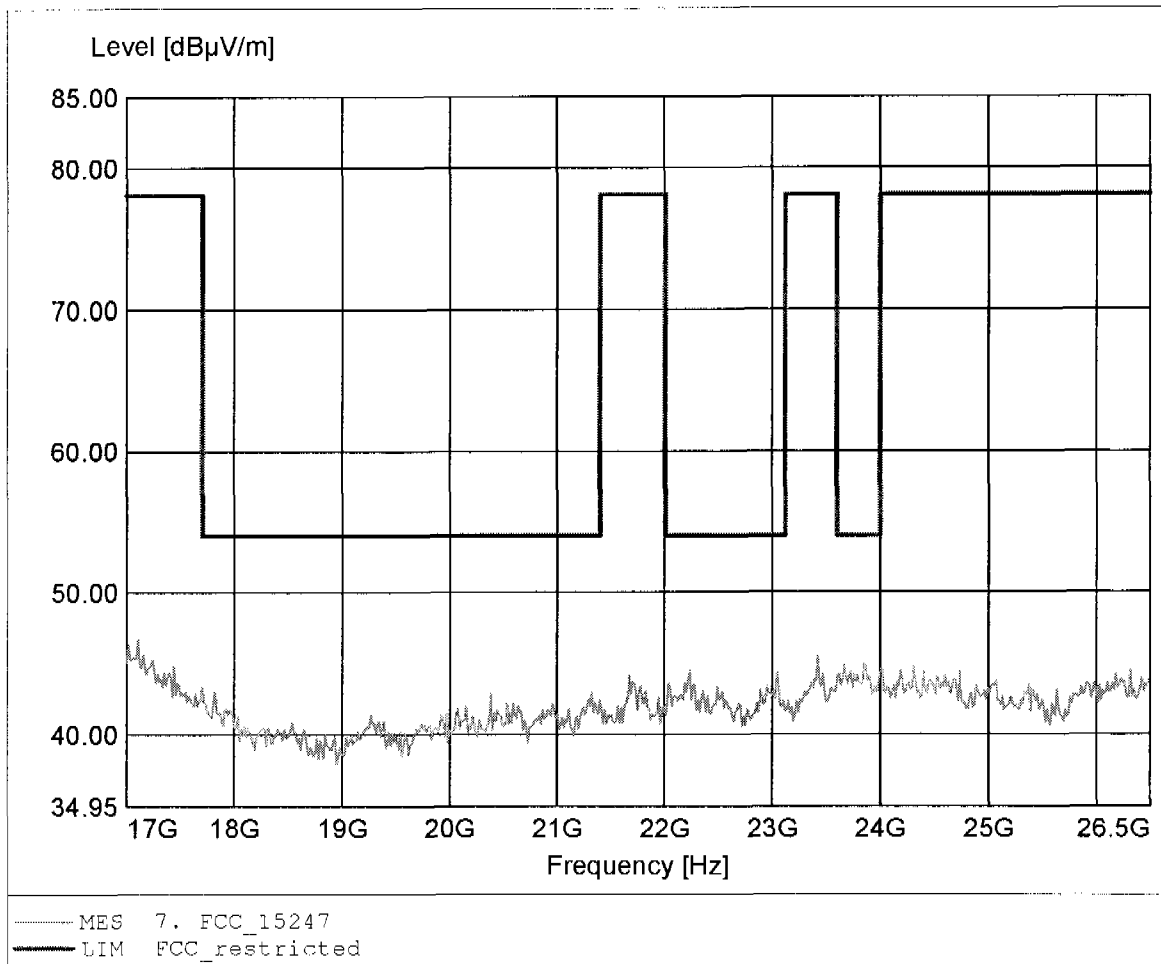

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C

Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2480 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.107GHz, Emax: 46.36dBuV/m, RBW: 1MHz

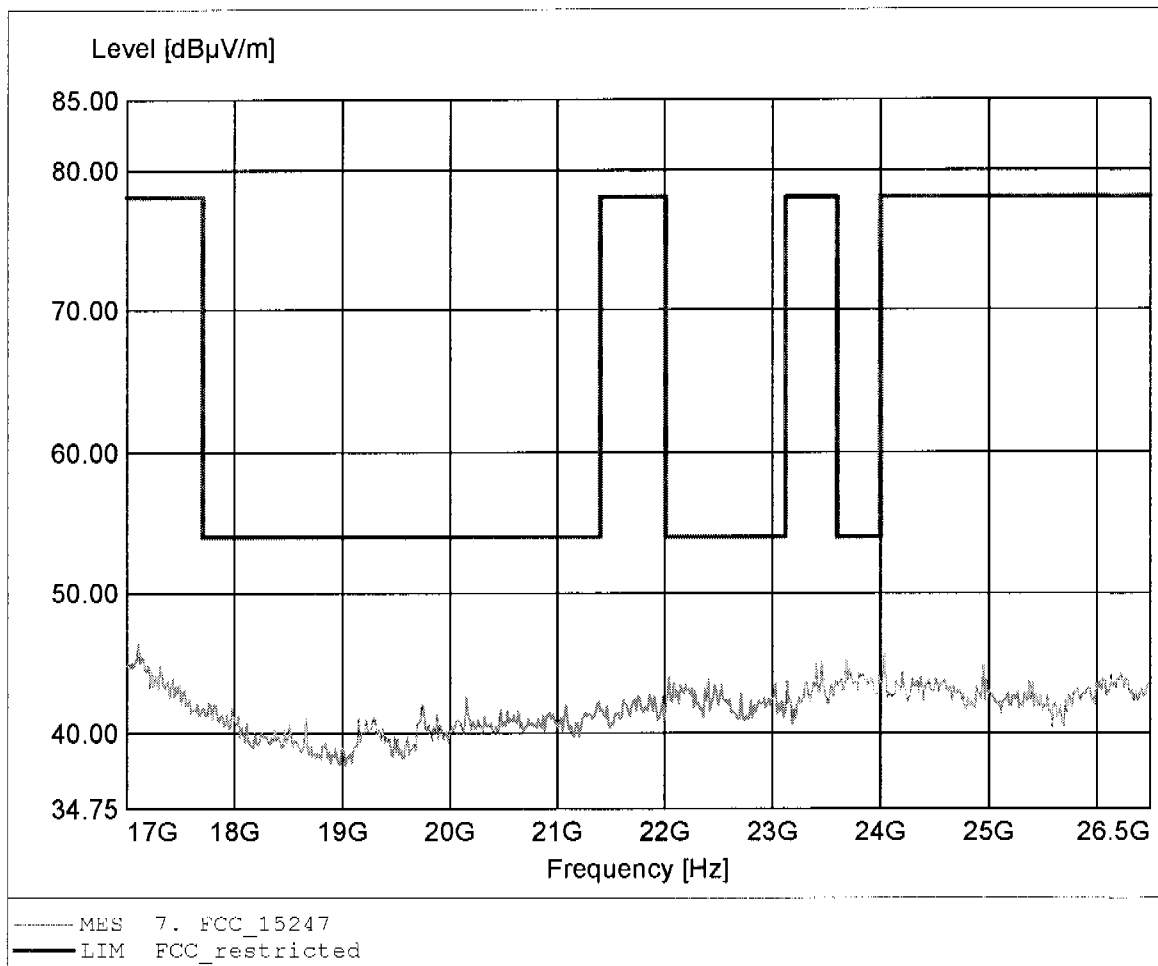



Appendix J


Band-edge compliance



FCC part 15.247

Band-edge compliance of RF conducted emissions

EUT	Bluetooth wireless stereo dongle
Model	Jabra A120s
Approval Holder	GN Mobile A/S
Temperature / Voltage	22°C / Unom: 3.7 V DC
Test Site / Operator	ETS / Mr. Handrik
Test Specification	FCC part 15 section 247(c)
Test Case	Band-edge compliance
Comment 1	Channel: 0 / 2402 MHz
Comment 2	Single frequency mode

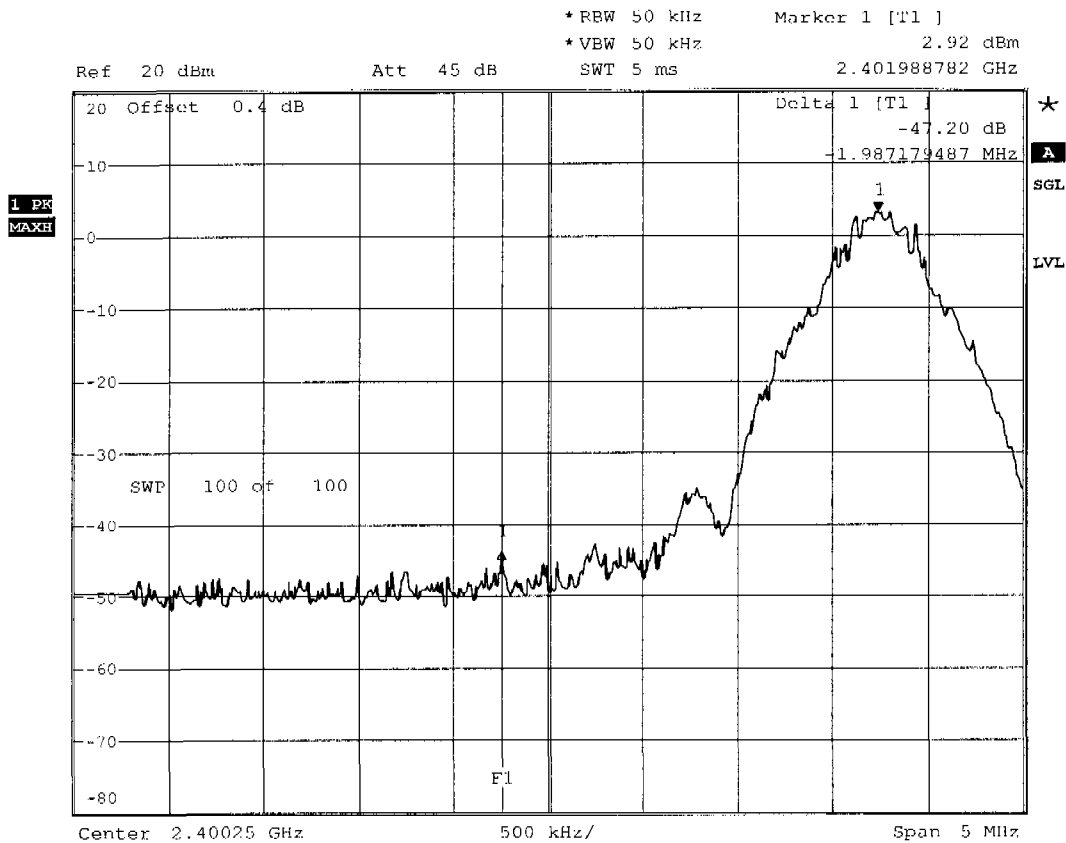

Date: 4.APR.2006 12:58:07


Measurement diagram



FCC part 15.247

Band-edge compliance of RF conducted emissions

EUT	Bluetooth wireless stereo dongle
Model	Jabra A120s
Approval Holder	GN Mobile A/S
Temperature / Voltage	22°C / Unom: 3.7 V DC
Test Site / Operator	ETS / Mr. Handrik
Test Specification	FCC part 15 section 247(c)
Test Case	Band-edge compliance
Comment 1	Channel.: 78 / 2480 MHz
Comment 2	Single frequency mode

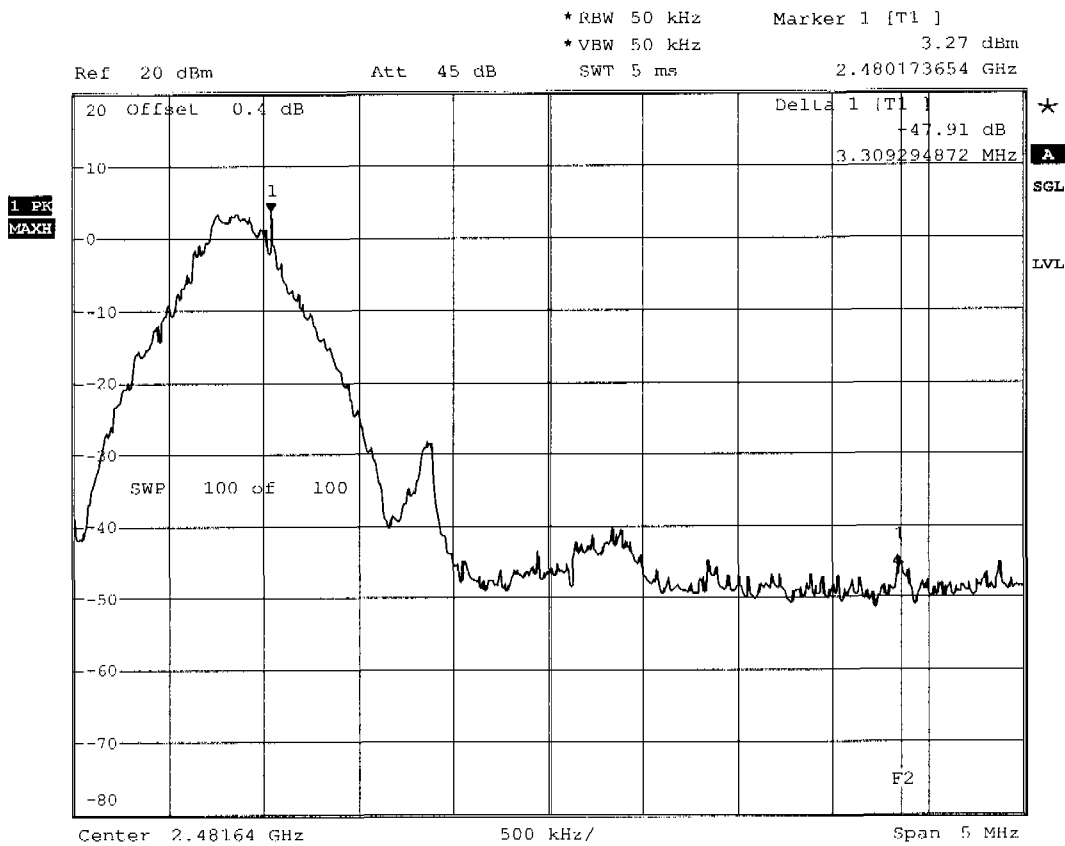

Date: 4.APR.2006 13:00:38


Measurement diagram



FCC part 15.247

Band-edge compliance of RF conducted emissions

EUT	Bluetooth wireless stereo dongle
Model	Jabra A120s
Approval Holder	GN Mobile A/S
Temperature / Voltage	22°C / Unom: 3.7 V DC
Test Site / Operator	ETS / Mr. Handrik
Test Specification	FCC part 15 section 247(c)
Test Case	Band-edge compliance
Comment 1	Channel: 0 / 2402 MHz
Comment 2	Hopping mode

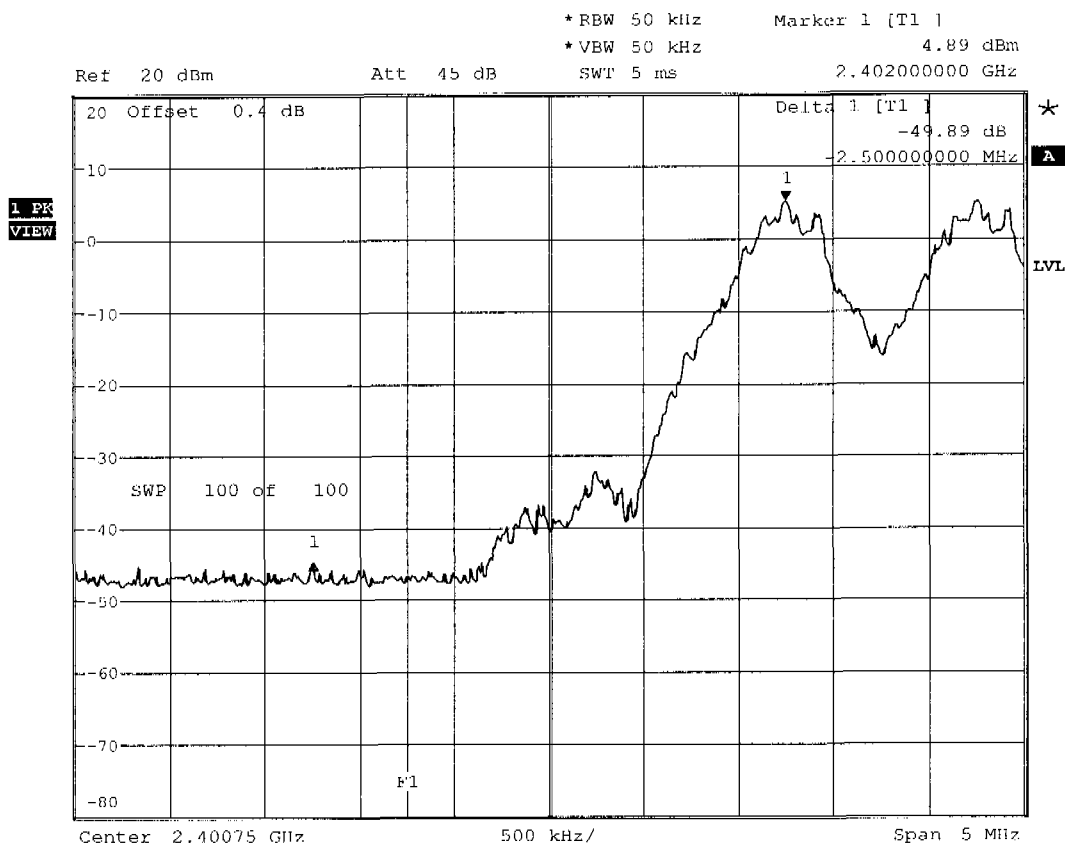

Date: 4.APR.2006 13:14:03


Measurement diagram



FCC part 15.247

Band-edge compliance of RF conducted emissions

EUT	Bluetooth wireless stereo dongle
Model	Jabra A120s
Approval Holder	GN Mobile A/S
Temperature / Voltage	22°C / Unom: 3.7 V DC
Test Site / Operator	ETS / Mr. Handrik
Test Specification	FCC part 15 section 247(c)
Test Case	Band-edge compliance
Comment 1	Channel: 78 / 2480 MHz
Comment 2	Hopping mode

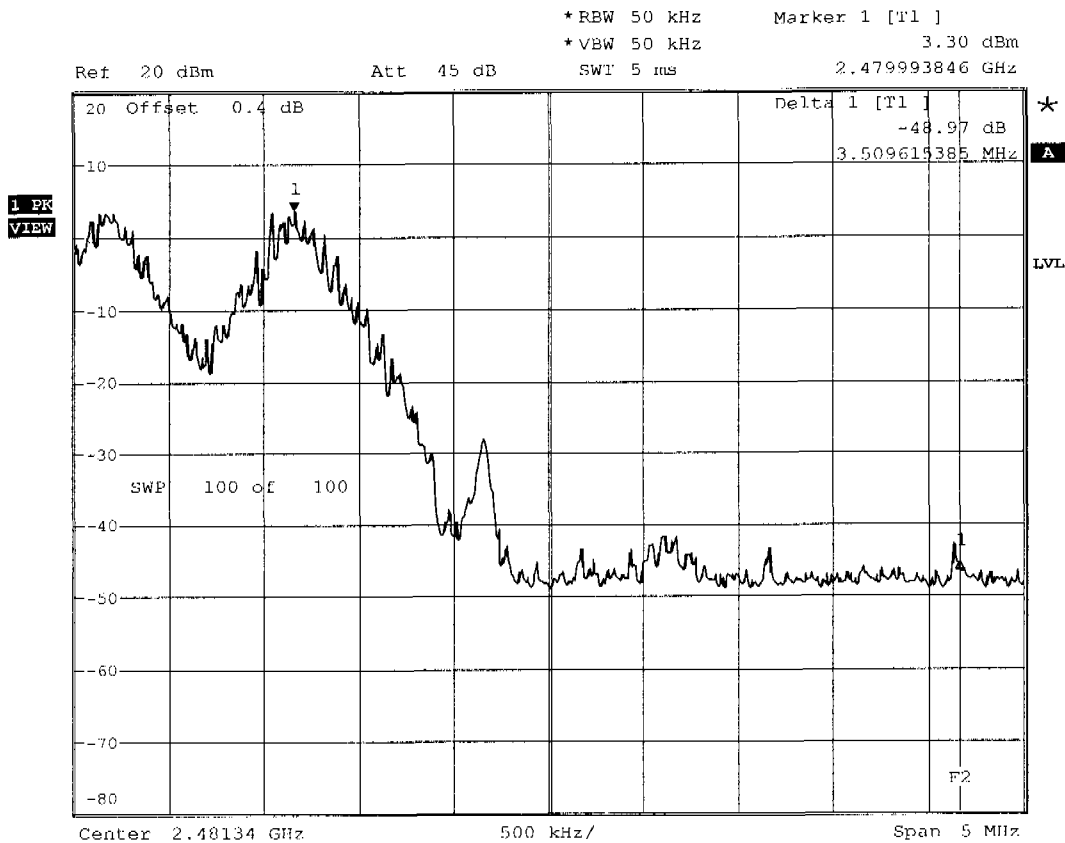

Date: 4.APR.2006 13:05:39

Measurement diagram




Appendix K

AC power line conducted emissions


EMI voltage test in the ac-mains according to FCC part 15

EUT: Bluetooth wireless stereo dongle
 Manufacturer: GN Mobile A/S (GN Netcom A/S)
 Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom: 23°C
 Test Site: ETS
 Operator: Mr. Marquardt
 Test Specification: V-Network: ESH2-Z5 (L1)
 Comment: model: Jabra A120s mode: charging
 Adaptor: FW7600/05

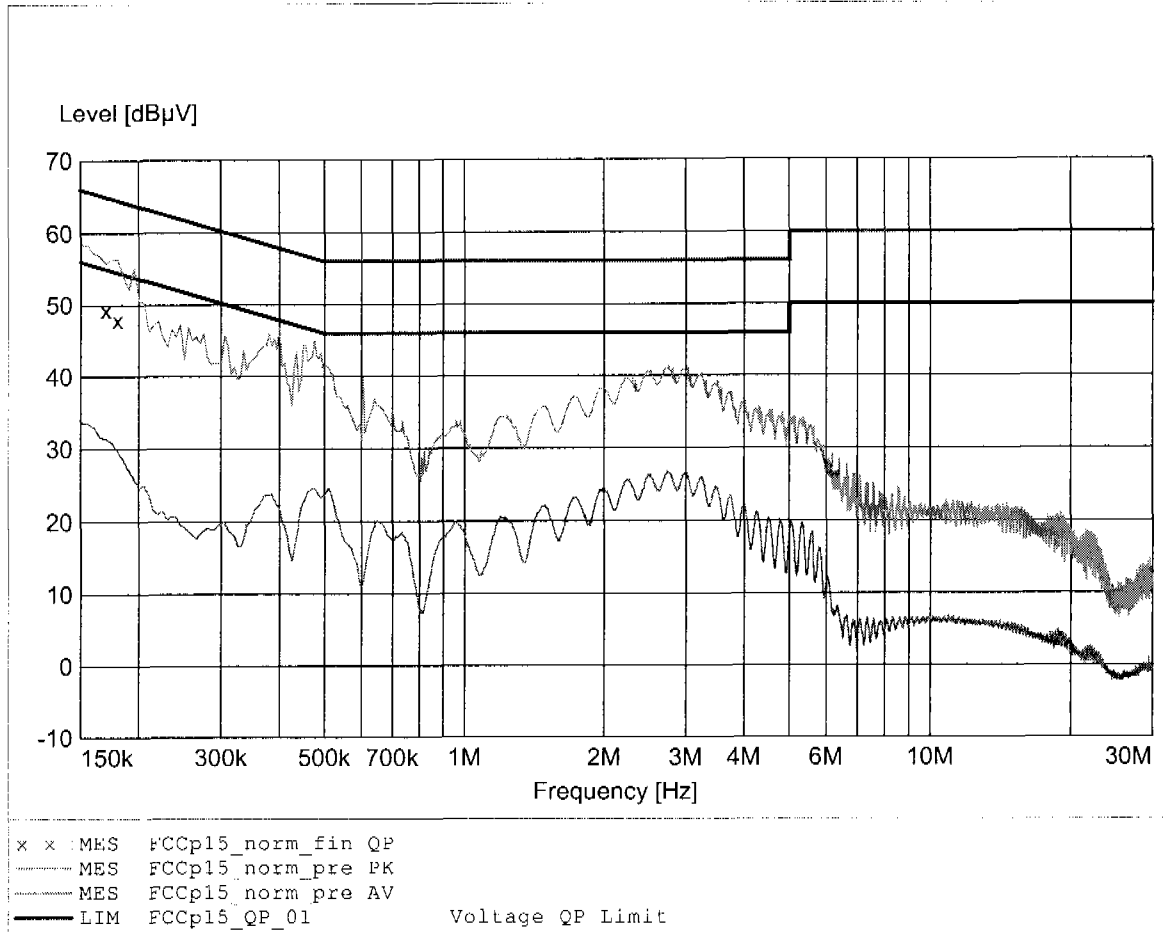

EMI voltage test in the ac-mains according to FCC part 15

EUT: Bluetooth wireless stereo dongle
 Manufacturer: GN Mobile A/S (GN Netcom A/S)
 Operating Condition: Unom: 120 V AC (AC/DC adaptor), Thom: 23°C
 Test Site: ETS
 Operator: Mr. Marquardt
 Test Specification: V-Network: ESH2-Z5 (N)
 Comment: model: Jabra A120s mode: charging
 Adaptor: FW7600/05

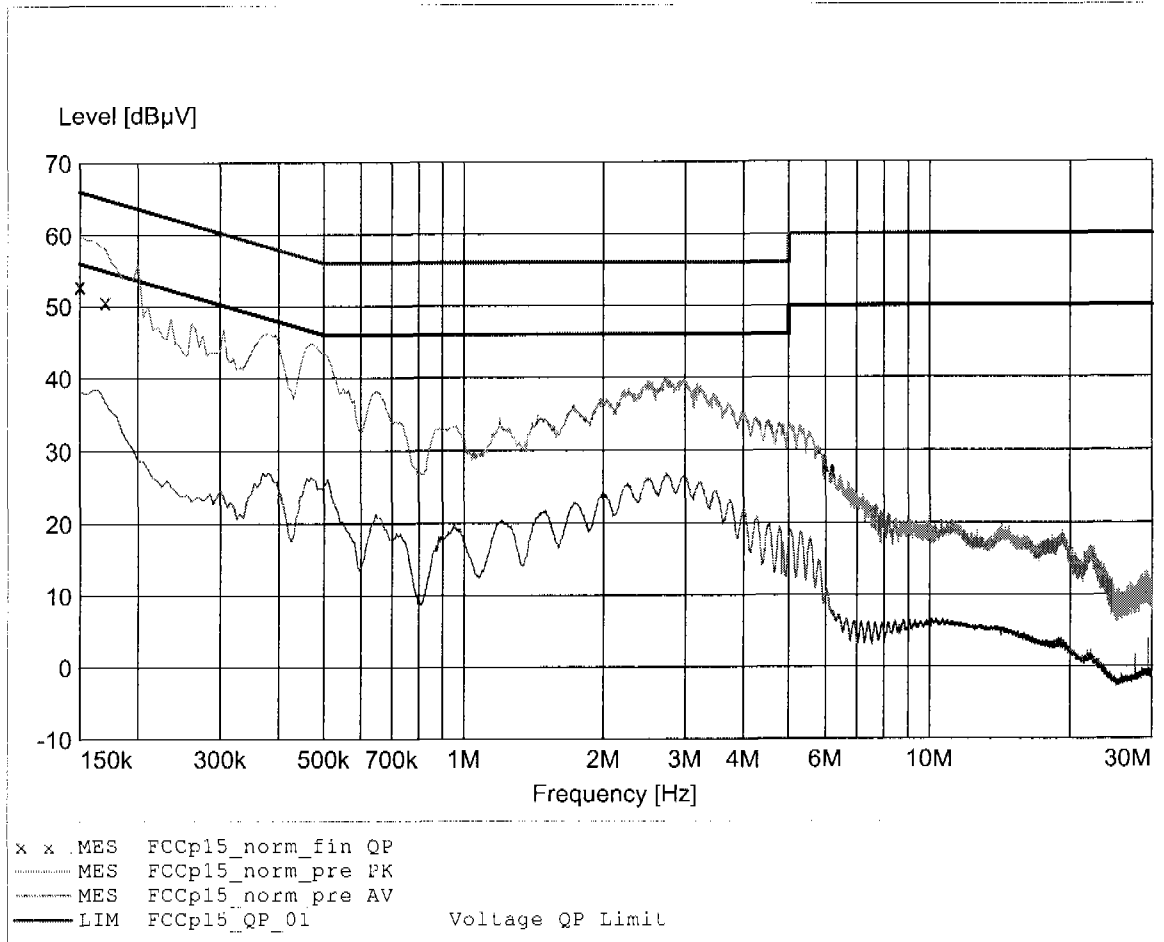




Appendix L

Receiver radiated emissions

Spurious emissions under normal conditions

in accordance to the EN 300 328


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2402 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: Fully anechoic chamber / mode: RX
Comment 1: Dist.: 3m, Ant.: HK 116, ampl.: None
Comment 2: Freq:161.042MHz Pmax:-70.25dBm RBW: 100 kHz

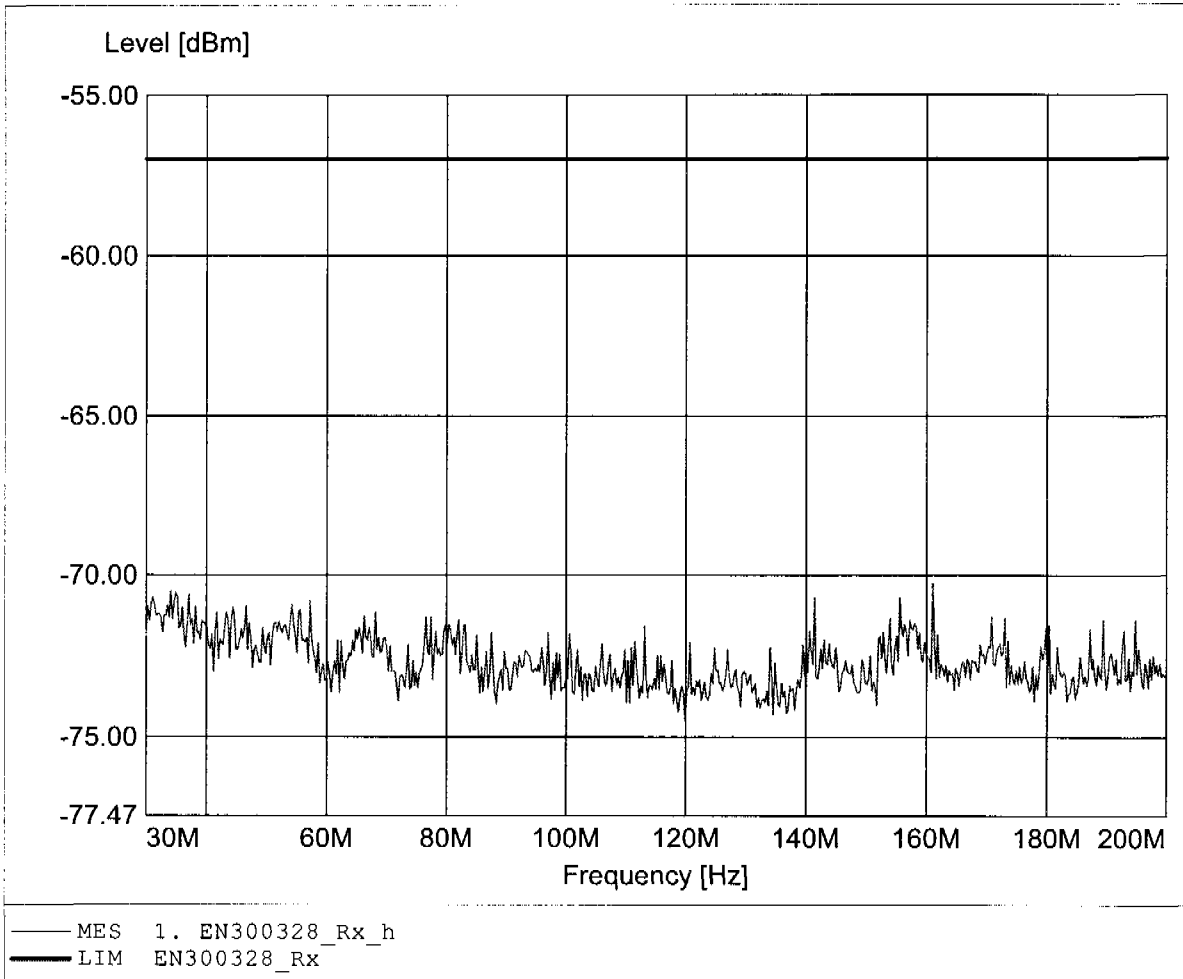

Spurious emissions under normal conditions

in accordance to the EN 300 328


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2402 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: Fully anechoic chamber / mode: RX
Comment 1: Dist.: 3m, Ant.: HK 116, ampl.: None
Comment 2: Freq:185.016MHz Pmax:-68.16dBm RBW: 100 kHz

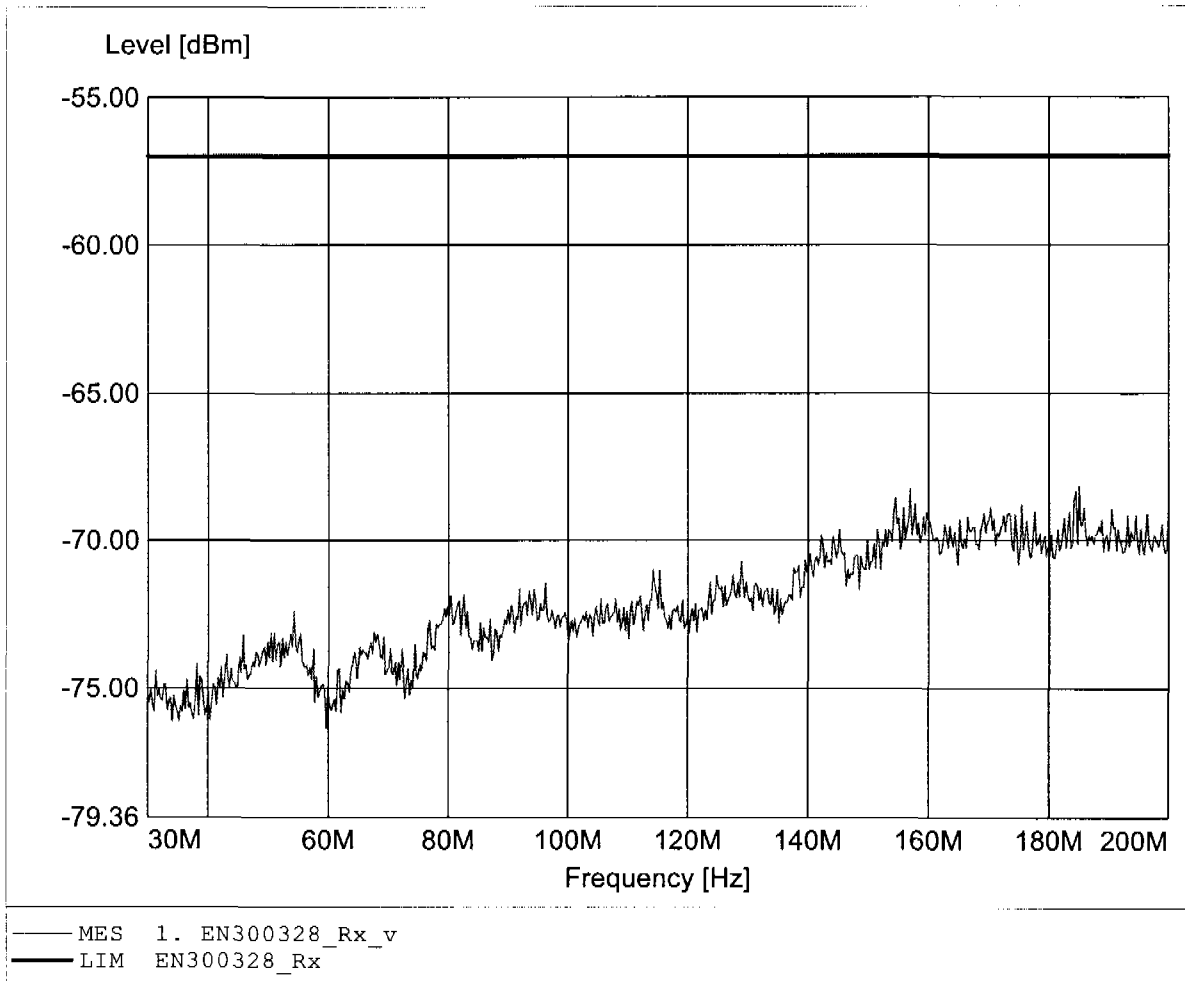

Spurious emissions under normal conditions

in accordance to the EN 300 328


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2402 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: Fully anechoic chamber / mode: RX
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.: 0.1-1GHz
Comment 2: Freq:358.974MHz Pmax:-73.22dBm RBW: 100 kHz

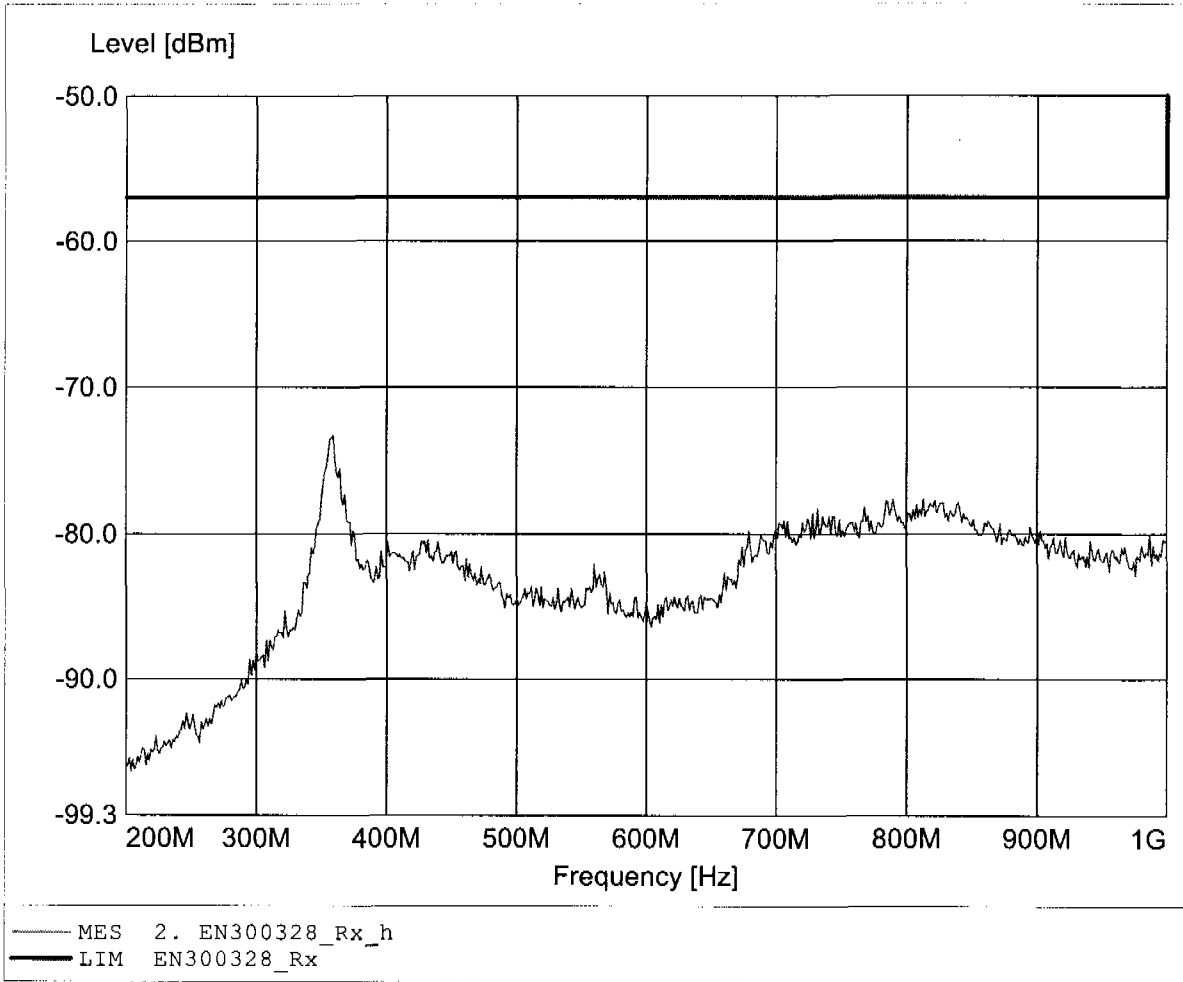

Spurious emissions under normal conditions

in accordance to the EN 300 328


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2402 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: Fully anechoic chamber / mode: RX
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.: 0.1-1GHz
Comment 2: Freq:358.974MHz Pmax:-67.68dBm RBW: 100 kHz

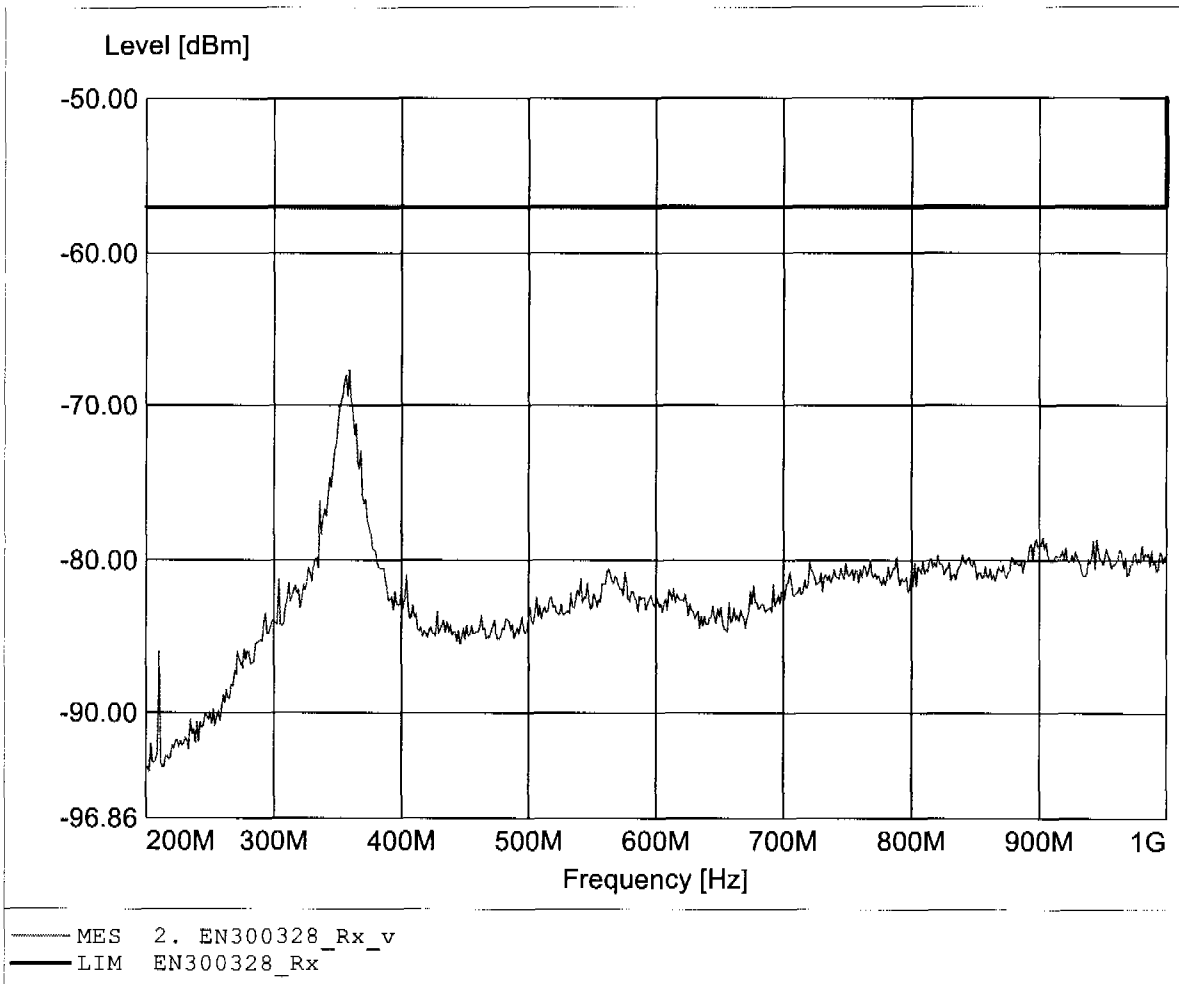

Spurious emissions under normal conditions

in accordance to the EN 300 328


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2402 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: Fully anechoic chamber / mode: RX
Comment 1: Dist.: 1m, Ant.: BBHA9120D, ampl.: 1-4GHz
Comment 2: Freq:1.601GHz Pmax:-54.24dBm RBW: 100 kHz

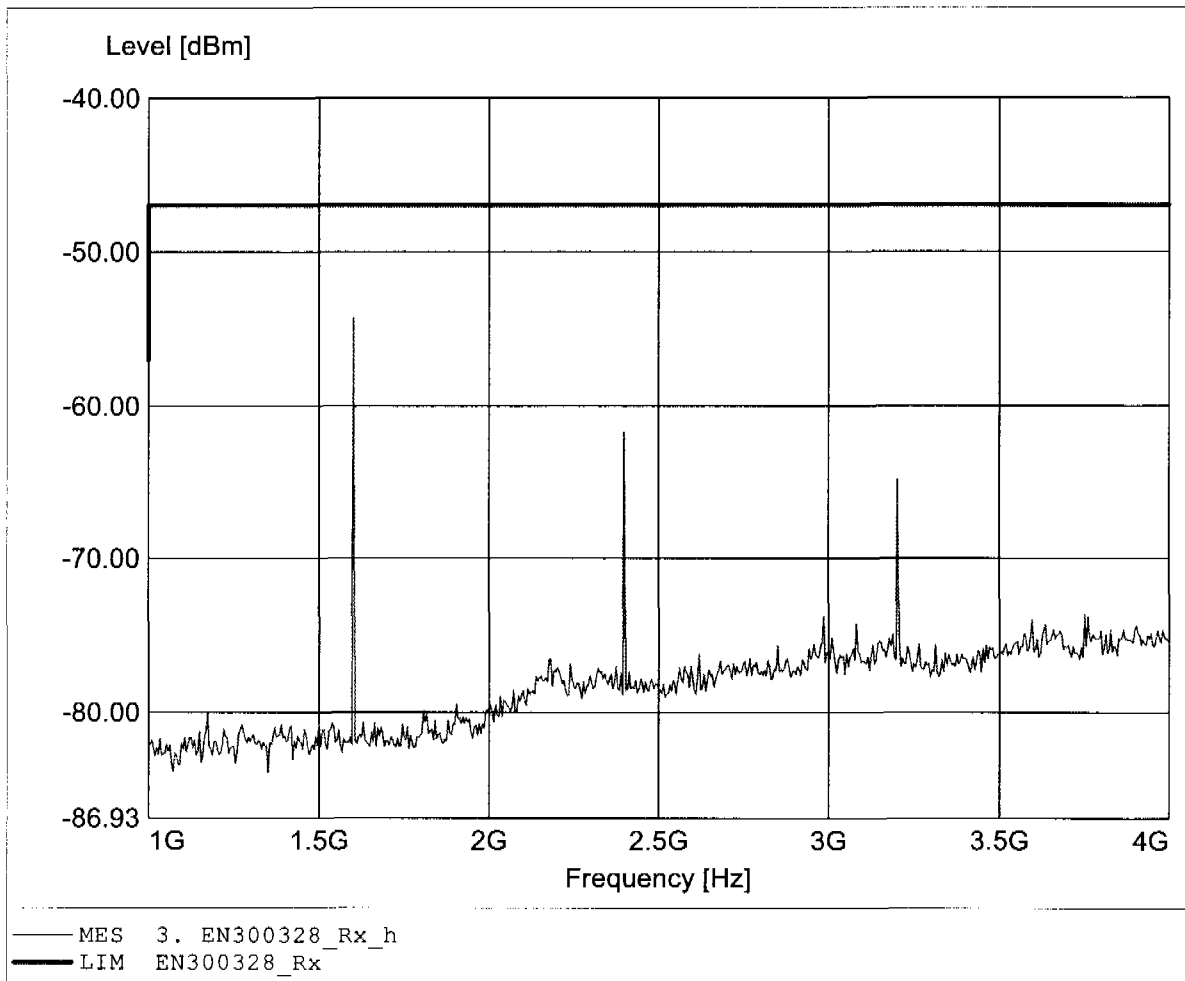

Spurious emissions under normal conditions

in accordance to the EN 300 328


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2402 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: Fully anechoic chamber / mode: RX
Comment 1: Dist.: 1m, Ant.: BBHA9120D, ampl.: 1-4GHz
Comment 2: Freq:1.601GHz Pmax:-58.52dBm RBW: 100 kHz

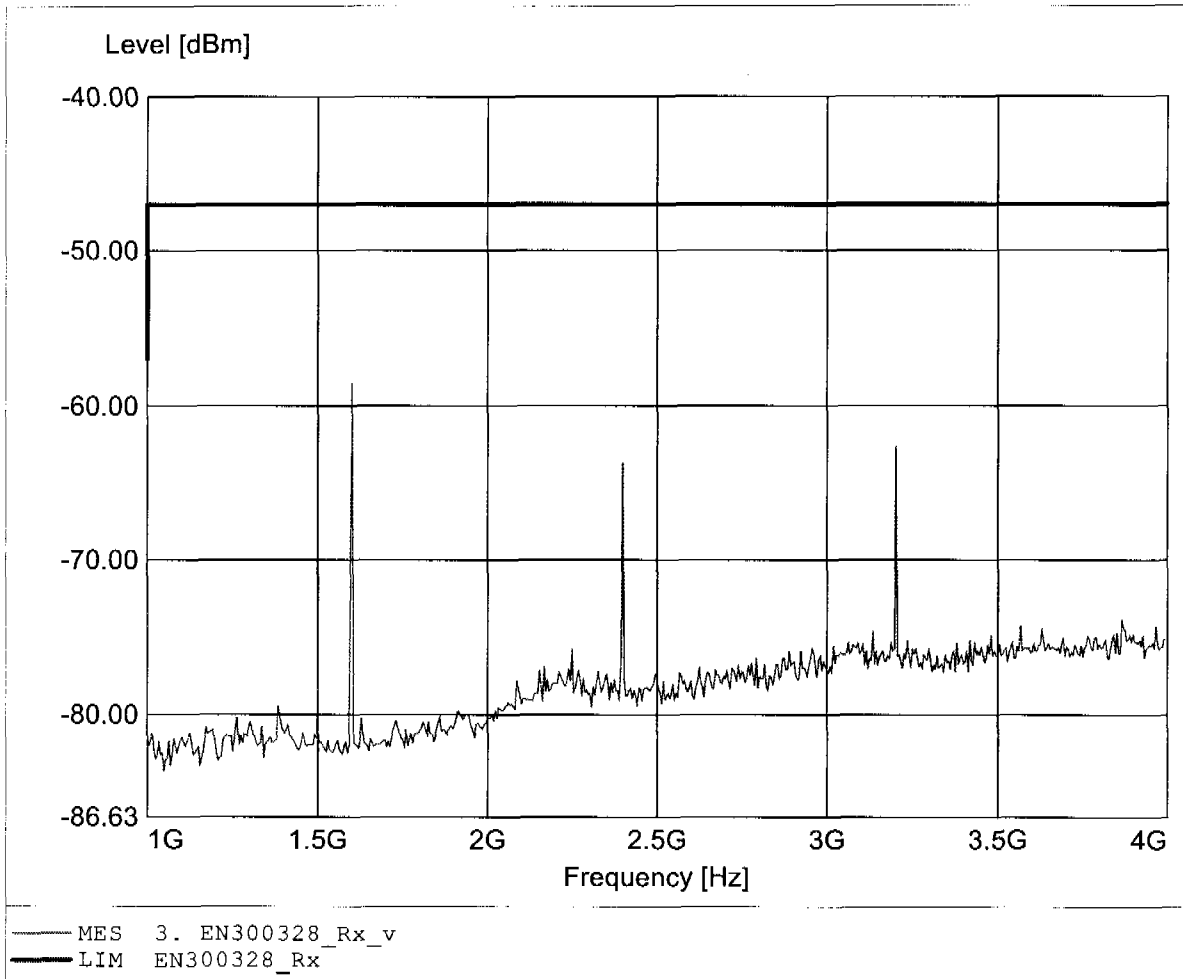

Spurious emissions under normal conditions

in accordance to the EN 300 328


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2402 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: Fully anechoic chamber / mode: RX
Comment 1: Dist.: 1m, Ant.: BBHA9120D, ampl.: 4-8GHz
Comment 2: Freq:7.968GHz Pmax:-67.77dBm RBW: 100 kHz

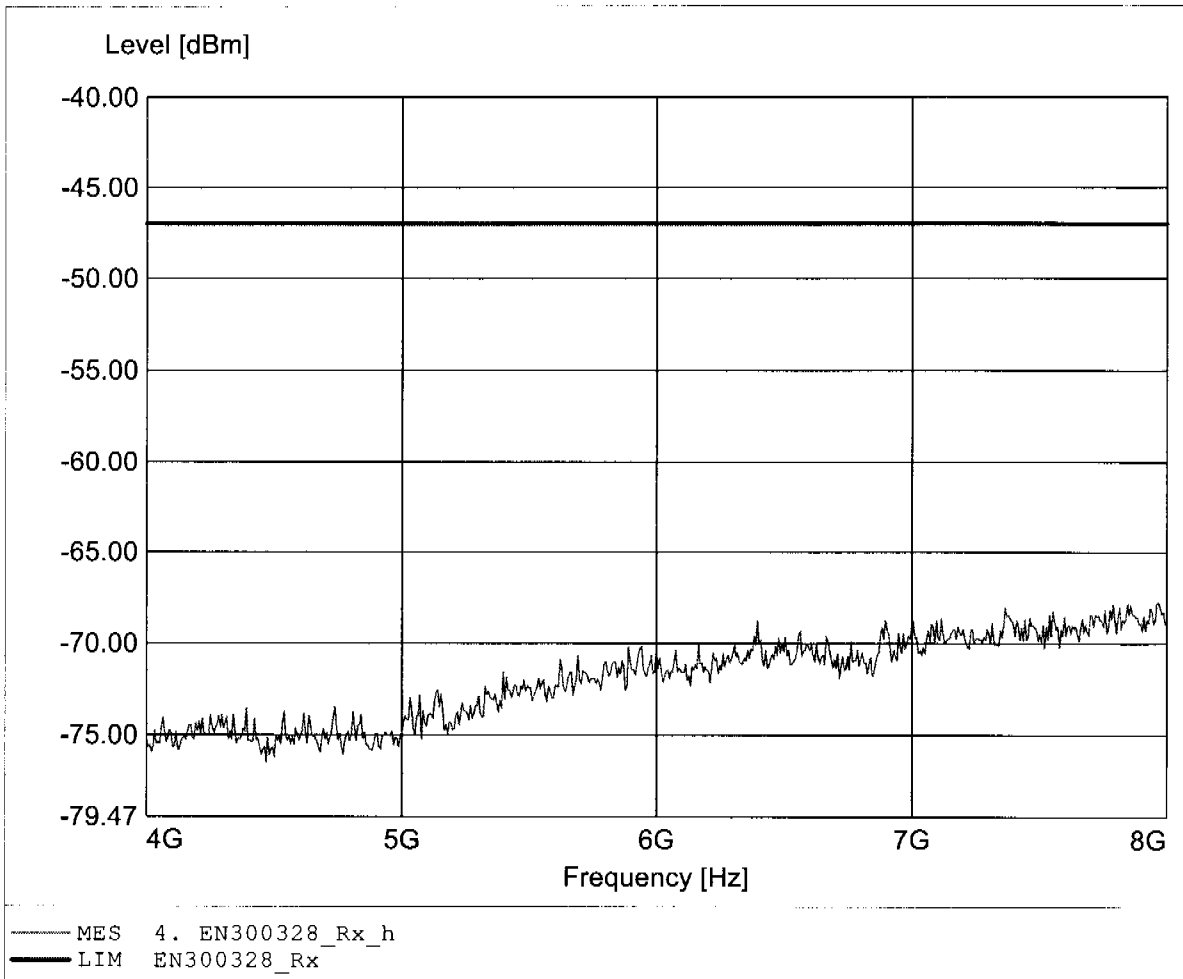

Spurious emissions under normal conditions

in accordance to the EN 300 328


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2402 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: Fully anechoic chamber / mode: RX
Comment 1: Dist.: 1m, Ant.: BBHA9120D, ampl.: 4-8GHz
Comment 2: Freq:7.872GHz Pmax:-67.28dBm RBW: 100 kHz

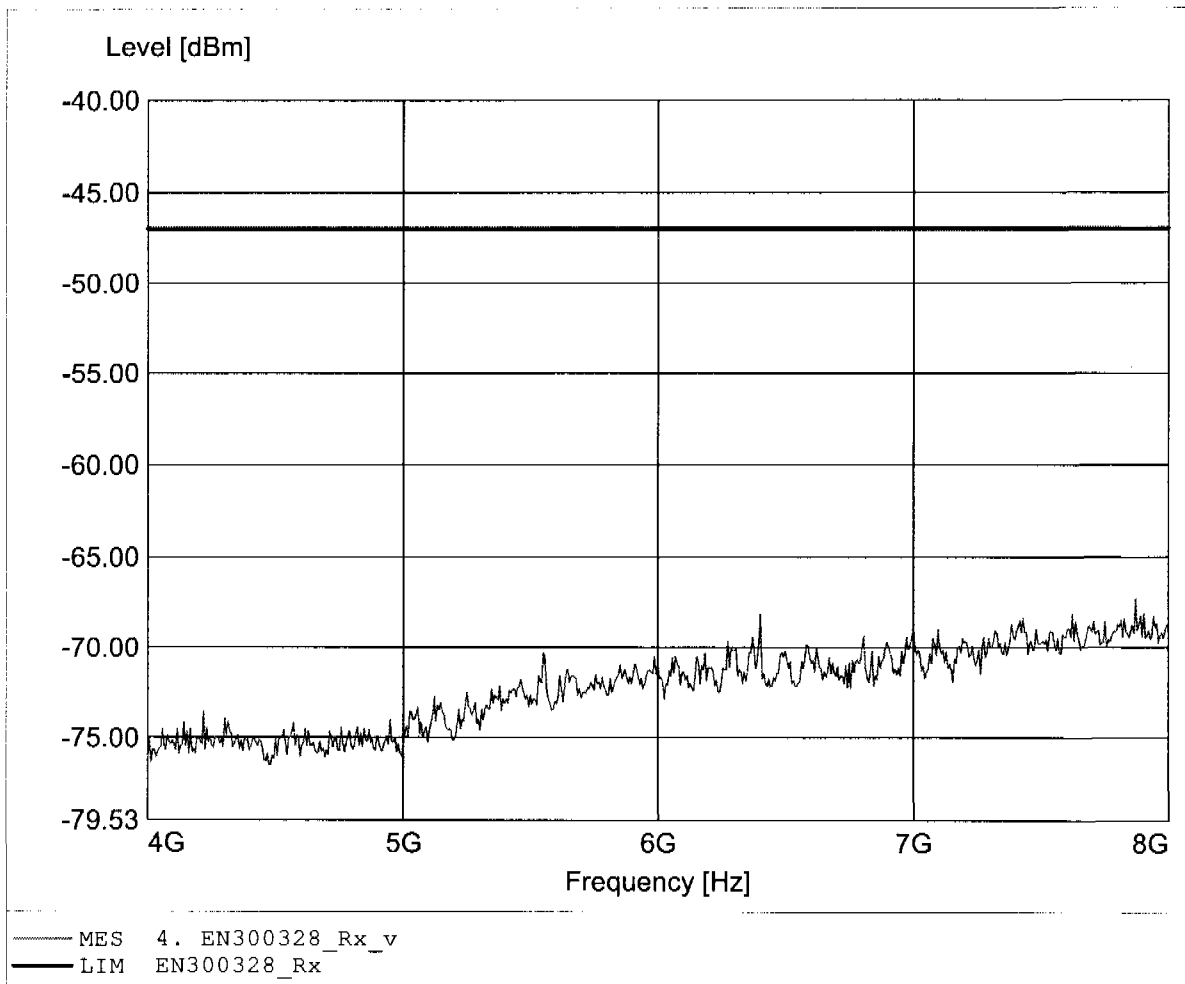

Spurious emissions under normal conditions

in accordance to the EN 300 328


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2402 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: Fully anechoic chamber / mode: RX
Comment 1: Dist.: 1m, Ant.: BBHA9120D, ampl.: 8-18GHz
Comment 2: Freq:11.730GHz Pmax:-62.00dBm RBW: 100 kHz

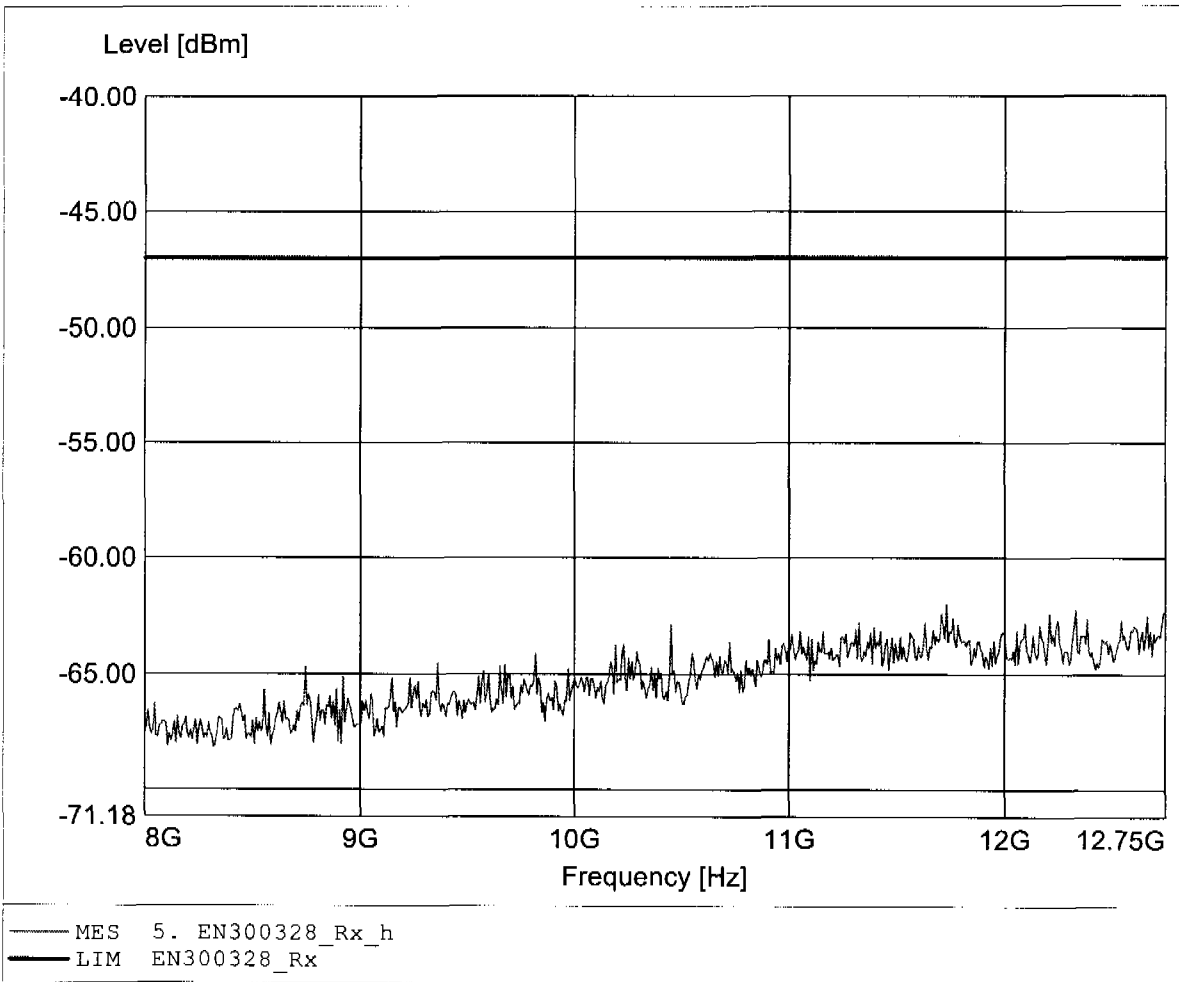

Spurious emissions under normal conditions

in accordance to the EN 300 328


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2402 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: Fully anechoic chamber / mode: RX
Comment 1: Dist.: 1m, Ant.: BBHA9120D, ampl.: 8-18GHz
Comment 2: Freq:12.681GHz Pmax:-60.93dBm RBW: 100 kHz

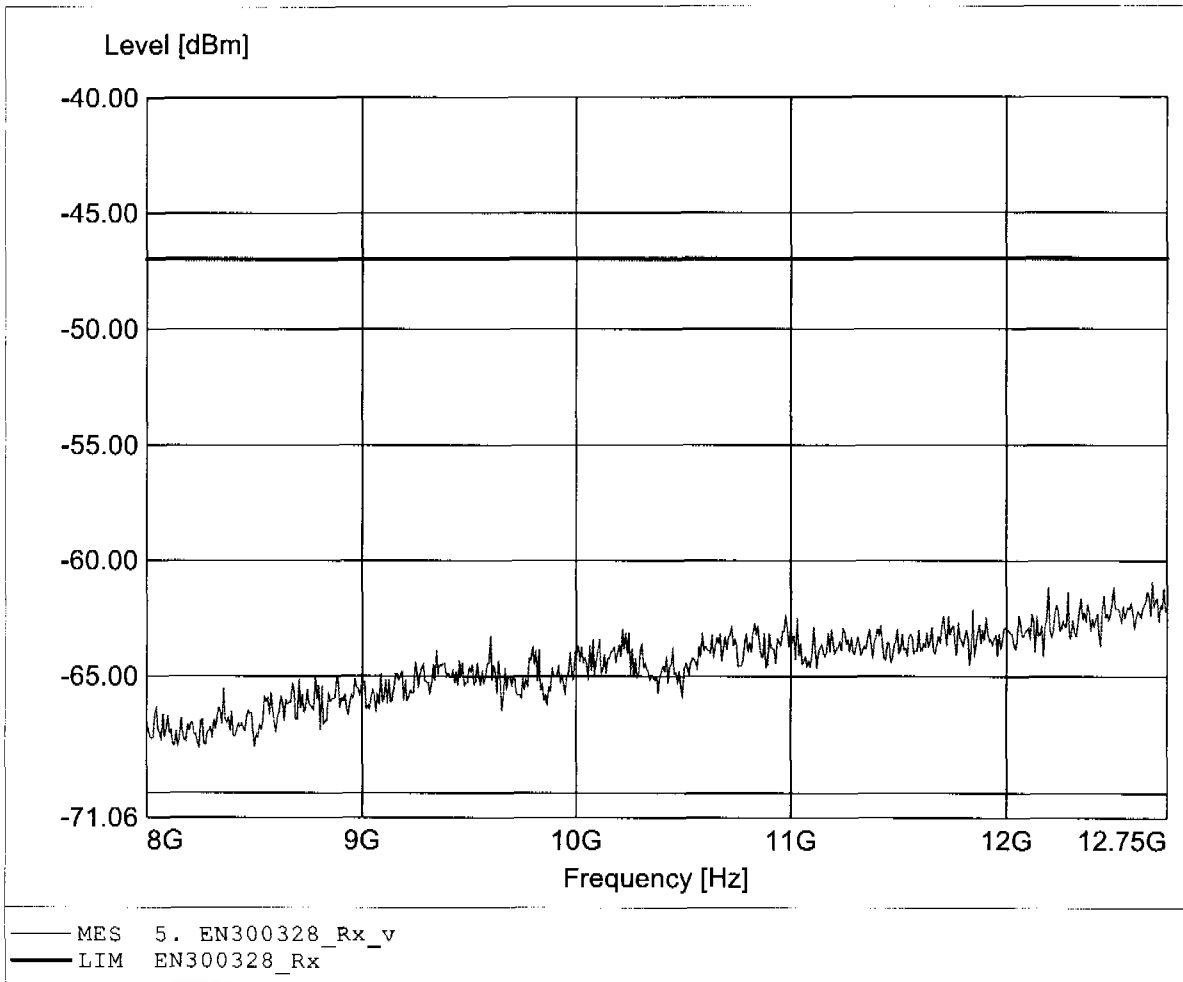

Spurious emissions under normal conditions

in accordance to the EN 300 328


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2480 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: Fully anechoic chamber / mode: RX
Comment 1: Dist.: 3m, Ant.: HK 116, ampl.: None
Comment 2: Freq:32.724MHz Pmax:-69.95dBm RBW: 100 kHz

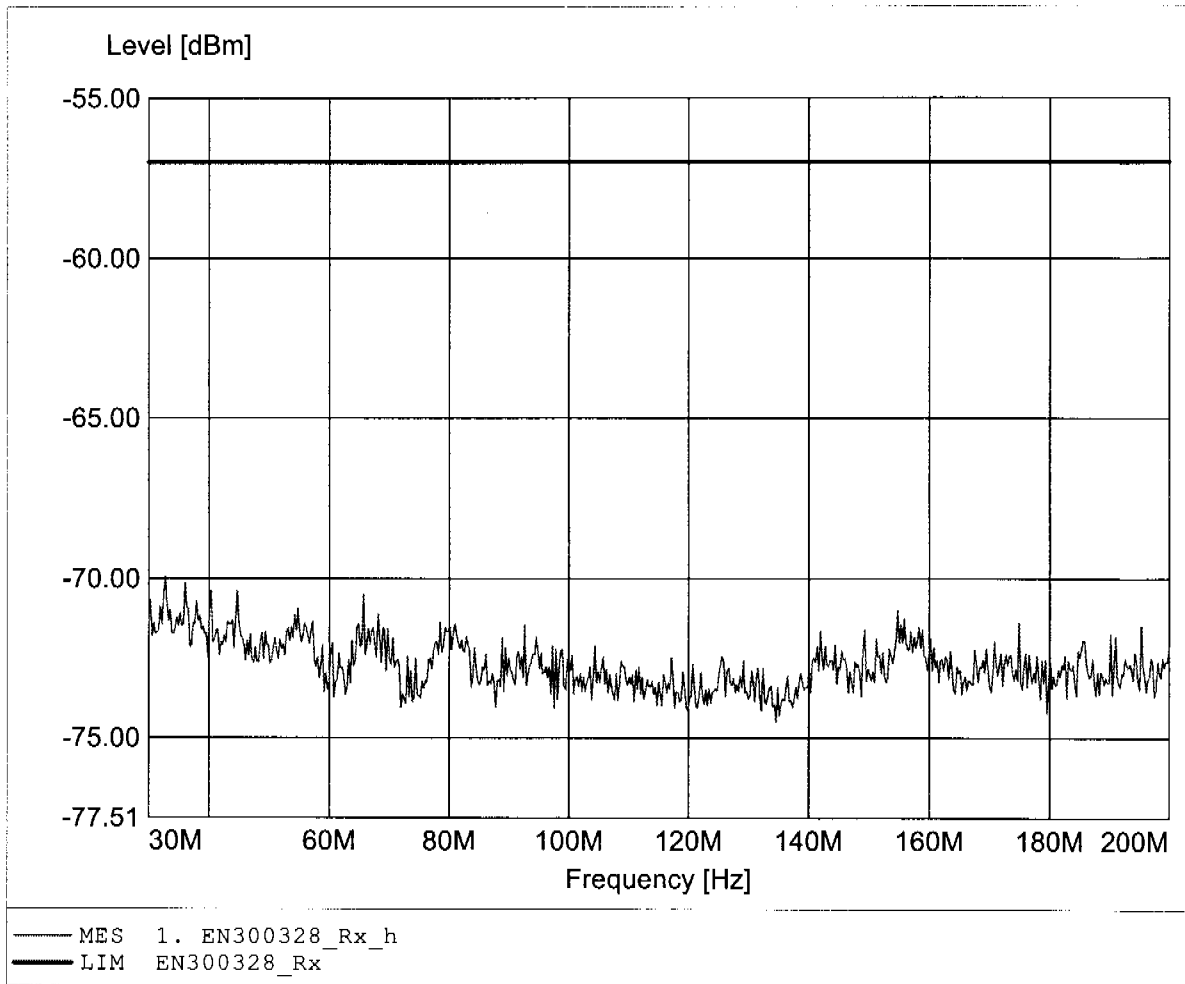

Spurious emissions under normal conditions

in accordance to the EN 300 328


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2480 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: Fully anechoic chamber / mode: RX
Comment 1: Dist.: 3m, Ant.: HK 116, ampl.: None
Comment 2: Freq:157.228MHz Pmax:-68.39dBm RBW: 100 kHz

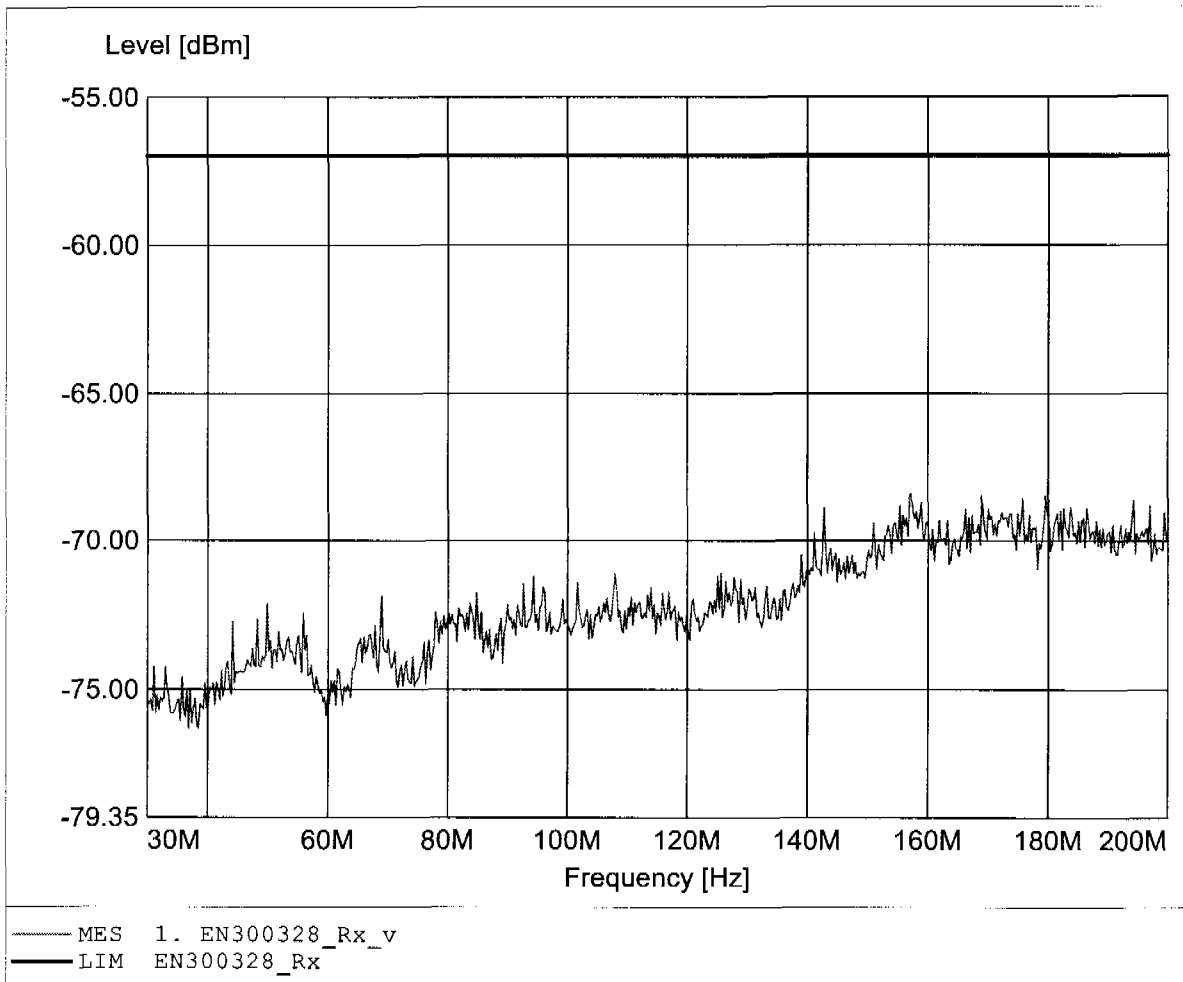

Spurious emissions under normal conditions

in accordance to the EN 300 328


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2480 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: Fully anechoic chamber / mode: RX
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.: 0.1-1GHz
Comment 2: Freq:785.897MHz Pmax:-77.31dBm RBW: 100 kHz

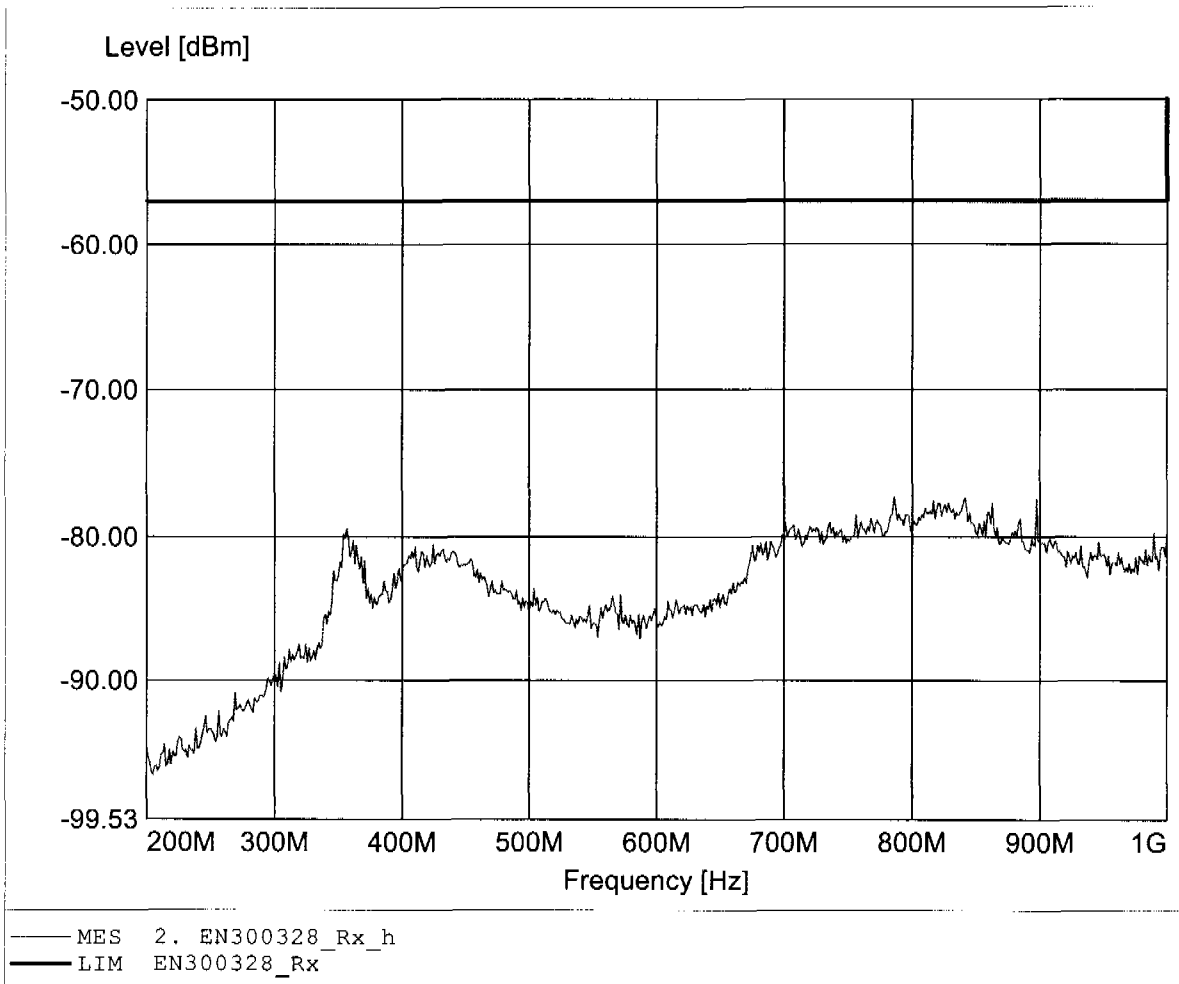

Spurious emissions under normal conditions

in accordance to the EN 300 328


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2480 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: Fully anechoic chamber / mode: RX
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.: 0.1-1GHz
Comment 2: Freq:355.128MHz Pmax:-67.80dBm RBW: 100 kHz

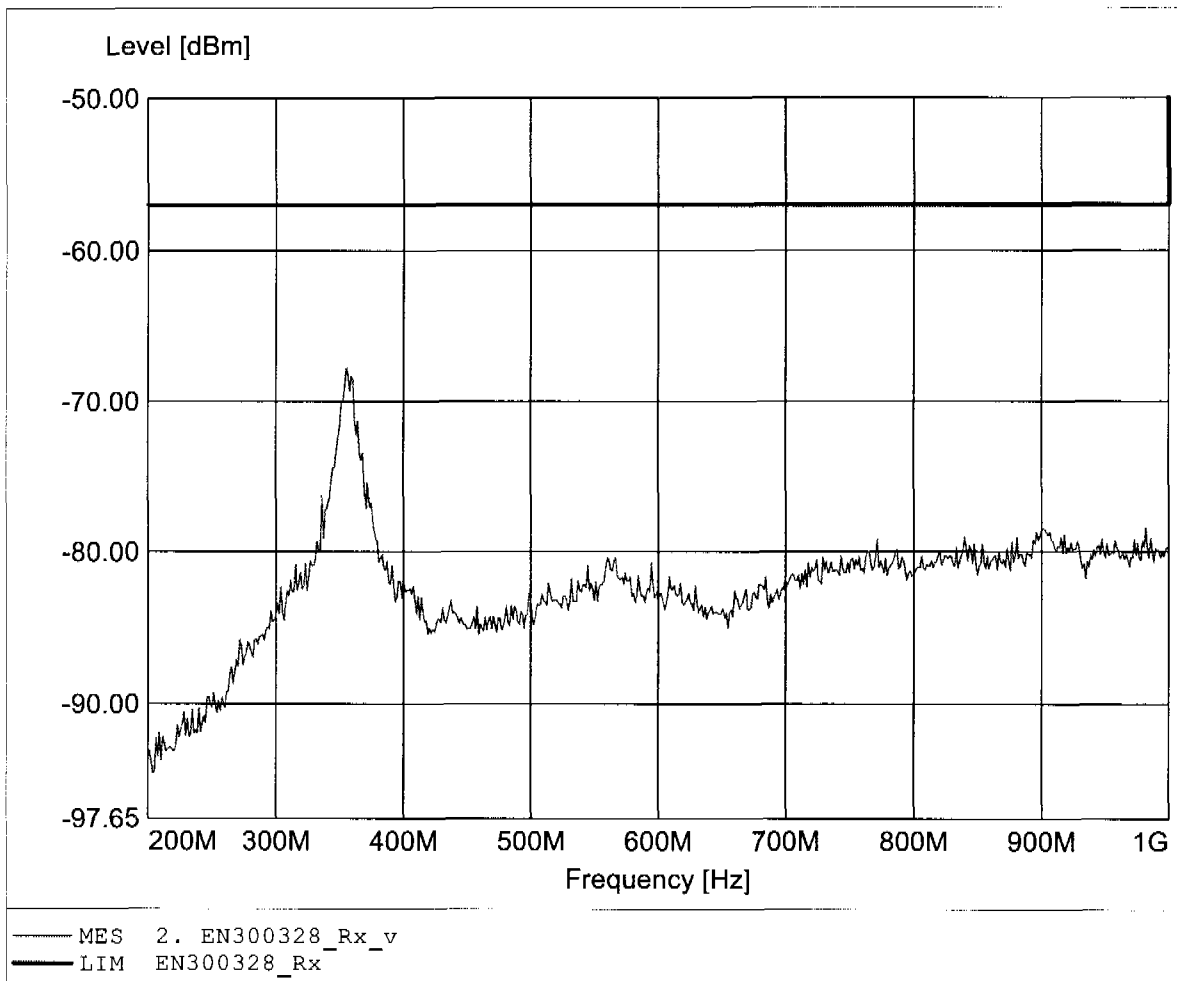

Spurious emissions under normal conditions

in accordance to the EN 300 328


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2480 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: Fully anechoic chamber / mode: RX
Comment 1: Dist.: 1m, Ant.: BBHA9120D, ampl.: 1-4GHz
Comment 2: Freq:1.649GHz Pmax:-53.76dBm RBW: 100 kHz

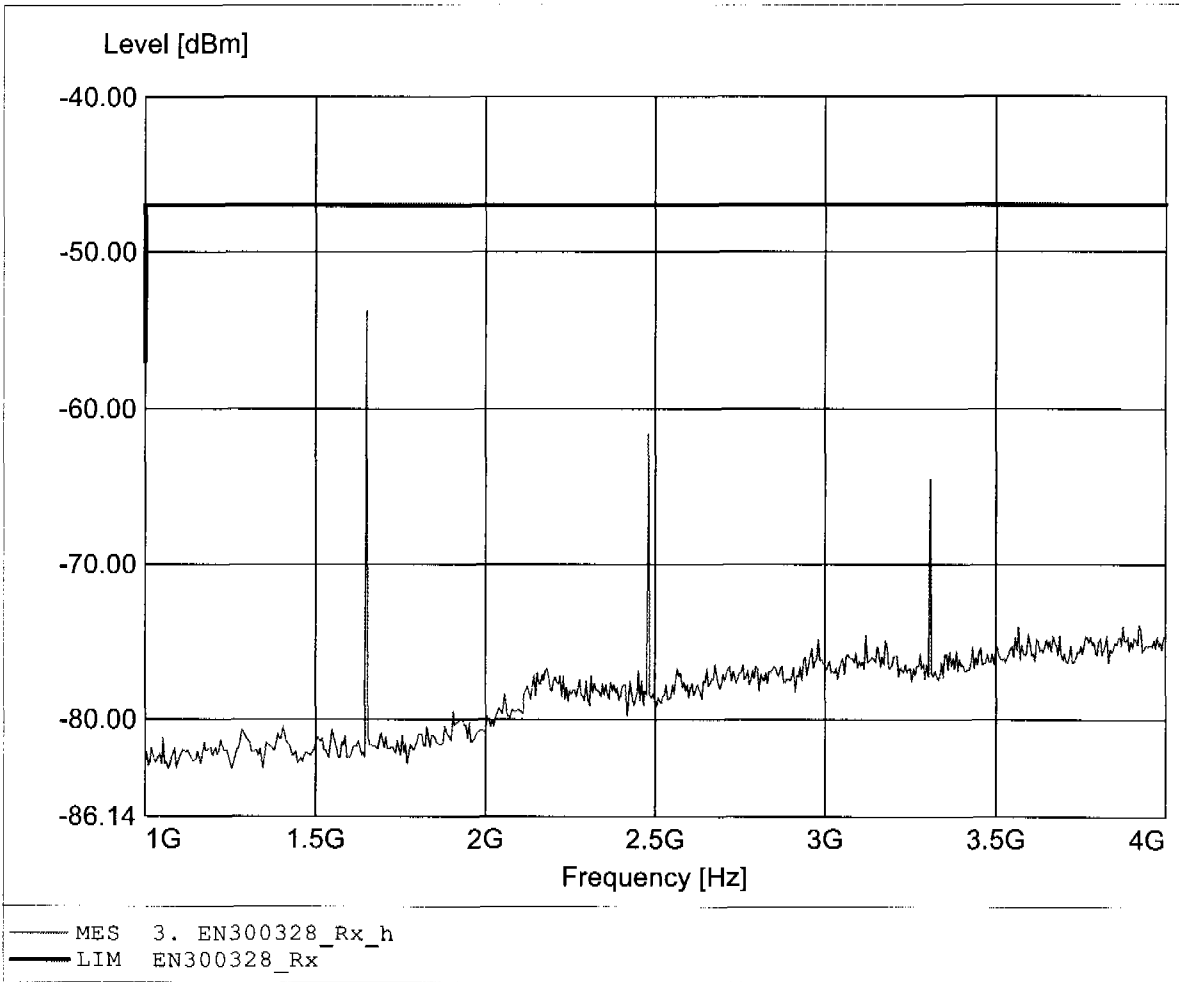

Spurious emissions under normal conditions

in accordance to the EN 300 328


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2480 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: Fully anechoic chamber / mode: RX
Comment 1: Dist.: 1m, Ant.: BBHA9120D, ampl.: 1-4GHz
Comment 2: Freq:1.649GHz Pmax:-59.90dBm RBW: 100 kHz

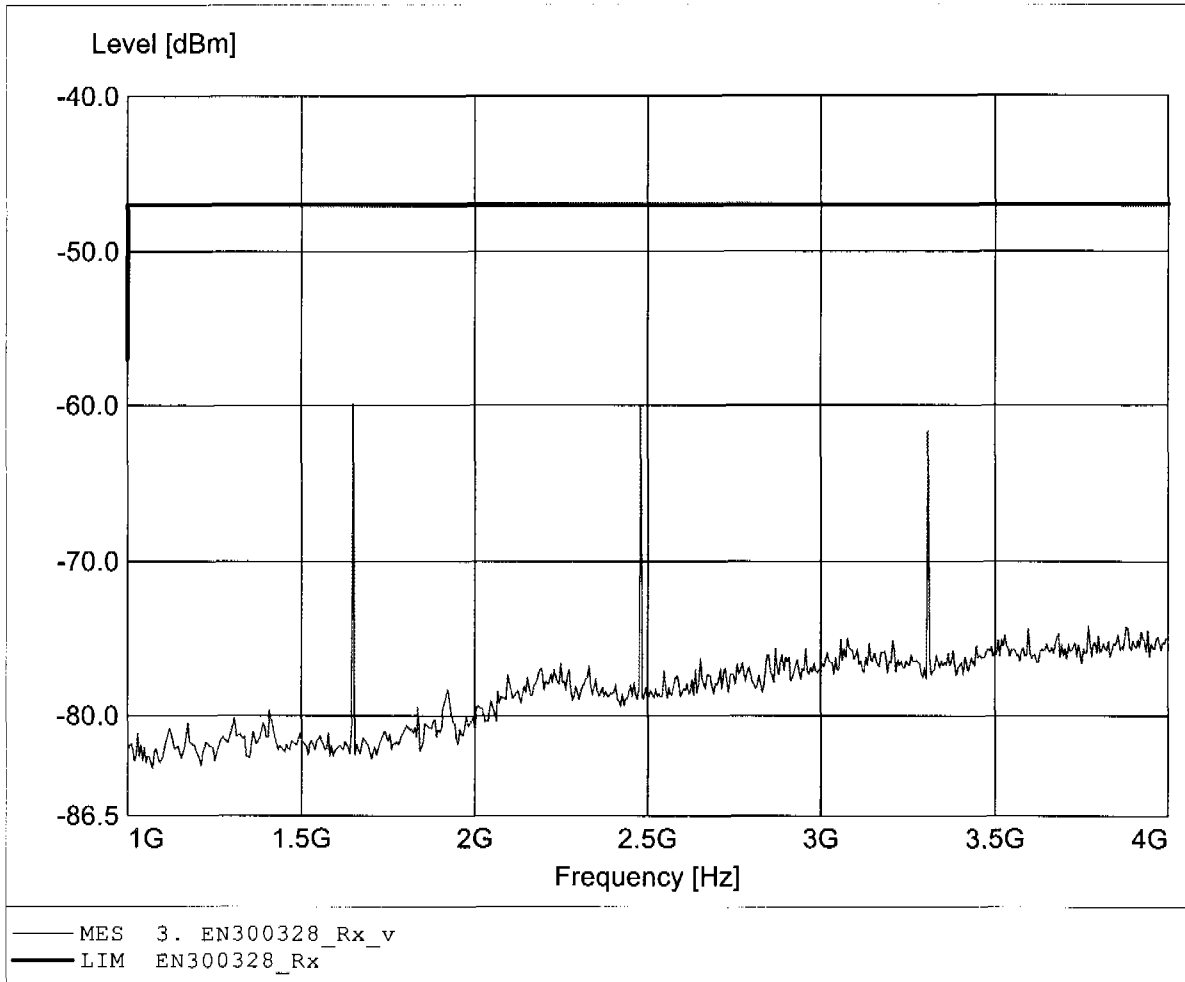

Spurious emissions under normal conditions

in accordance to the EN 300 328


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2480 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: Fully anechoic chamber / mode: RX
Comment 1: Dist.: 1m, Ant.: BBHA9120D, ampl.: 4-8GHz
Comment 2: Freq:6.609GHz Pmax:-66.32dBm RBW: 100 kHz

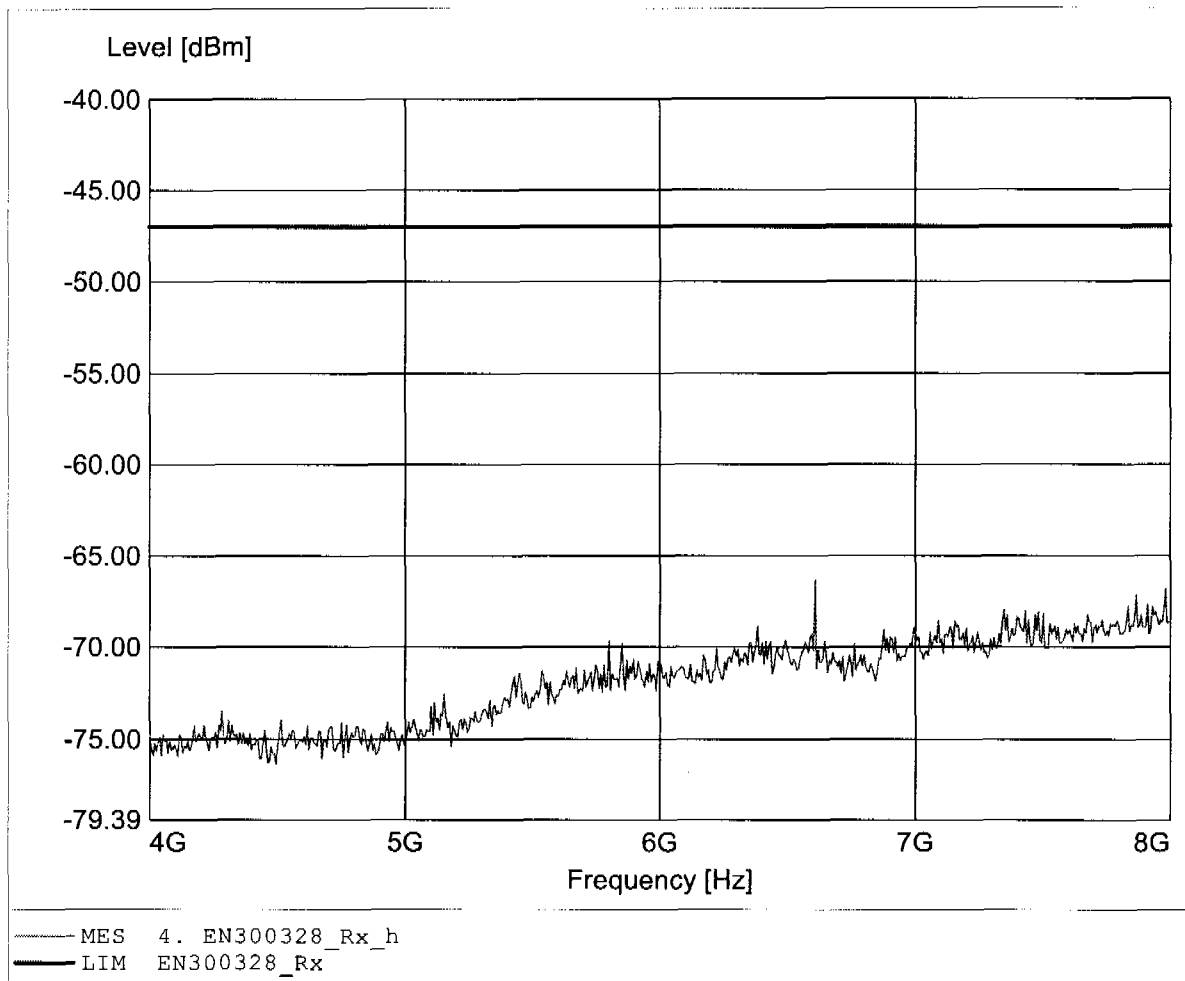

Spurious emissions under normal conditions

in accordance to the EN 300 328


Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2480 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: Fully anechoic chamber / mode: RX
Comment 1: Dist.: 1m, Ant.: BBHA9120D, ampl.: 4-8GHz
Comment 2: Freq:7.994GHz Pmax:-67.85dBm RBW: 100 kHz

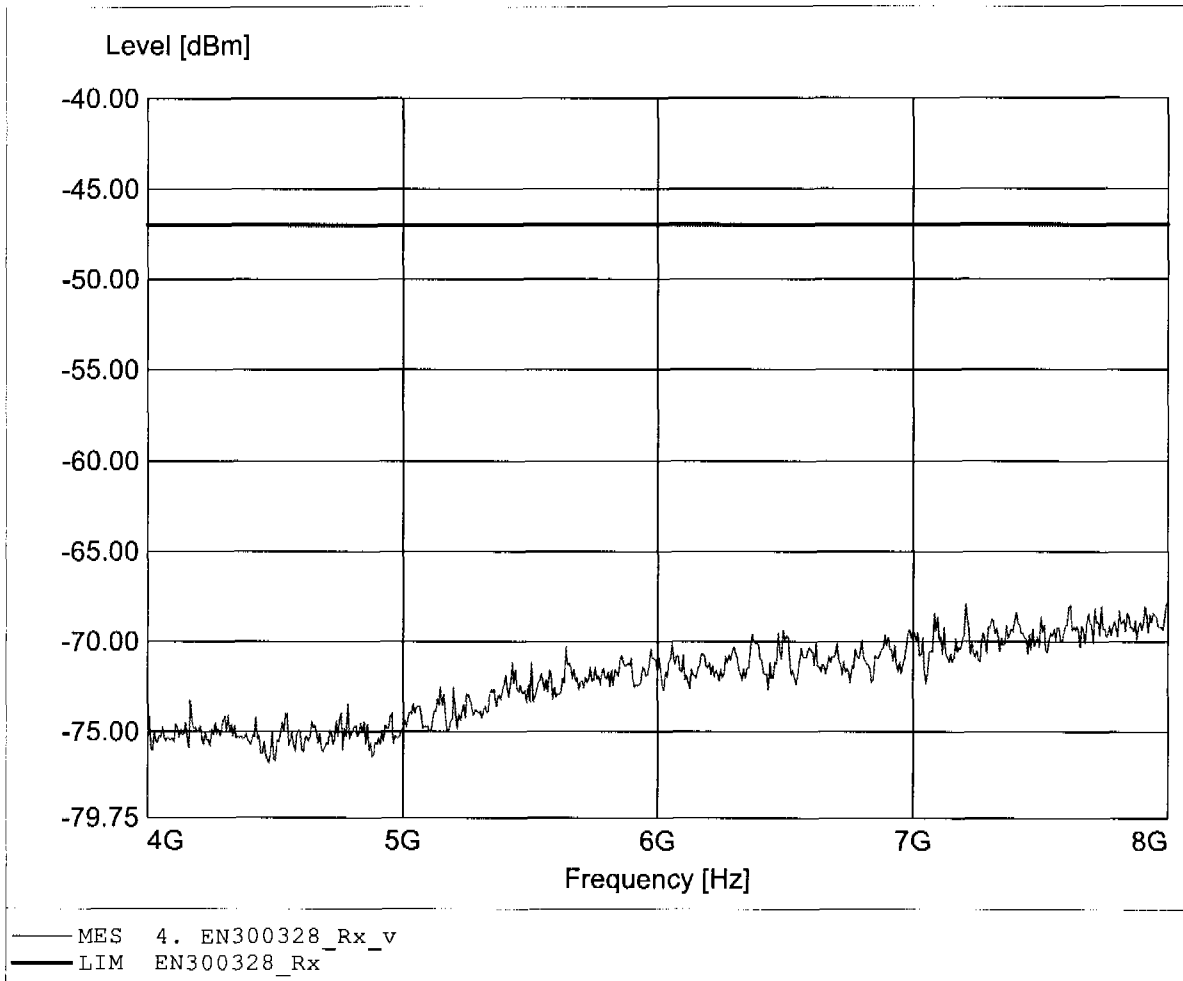

Spurious emissions under normal conditions

in accordance to the EN 300 328

Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2480 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: Fully anechoic chamber / mode: RX
Comment 1: Dist.: 1m, Ant.: BBHA9120D, ampl.: 8-18GHz
Comment 2: Freq:12.628GHz Pmax:-61.93dBm RBW: 100 kHz

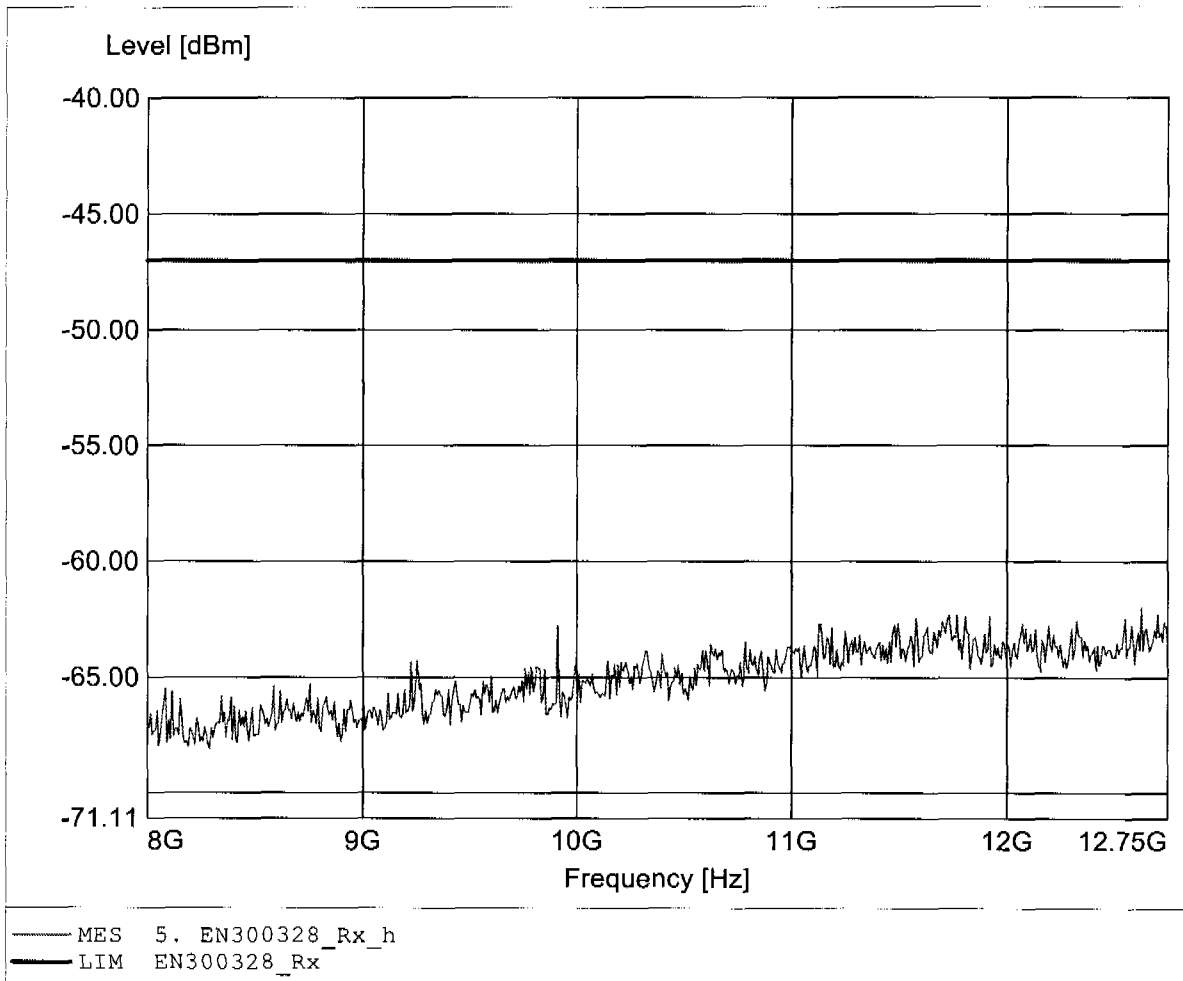

Spurious emissions under normal conditions

in accordance to the EN 300 328

Approval Holder: GN Mobile A/S
EUT: Bluetooth wireless stereo dongle
Model: Jabra A120s / 2480 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 3.7 VDC
Test Specification: Fully anechoic chamber / mode: RX
Comment 1: Dist.: 1m, Ant.: BBHA9120D, ampl.: 8-18GHz
Comment 2: Freq:9.911GHz Pmax:-59.78dBm RBW: 100 kHz

