




Appendix B

Peak Output Power




Marker 1 [T1] RBW 1 MHz RF Att 50 dB
Ref Lvl 1.99 dBm VBW 1 MHz
25 dBm 2.40211924 GHz SWT 5 ms Unit dBm

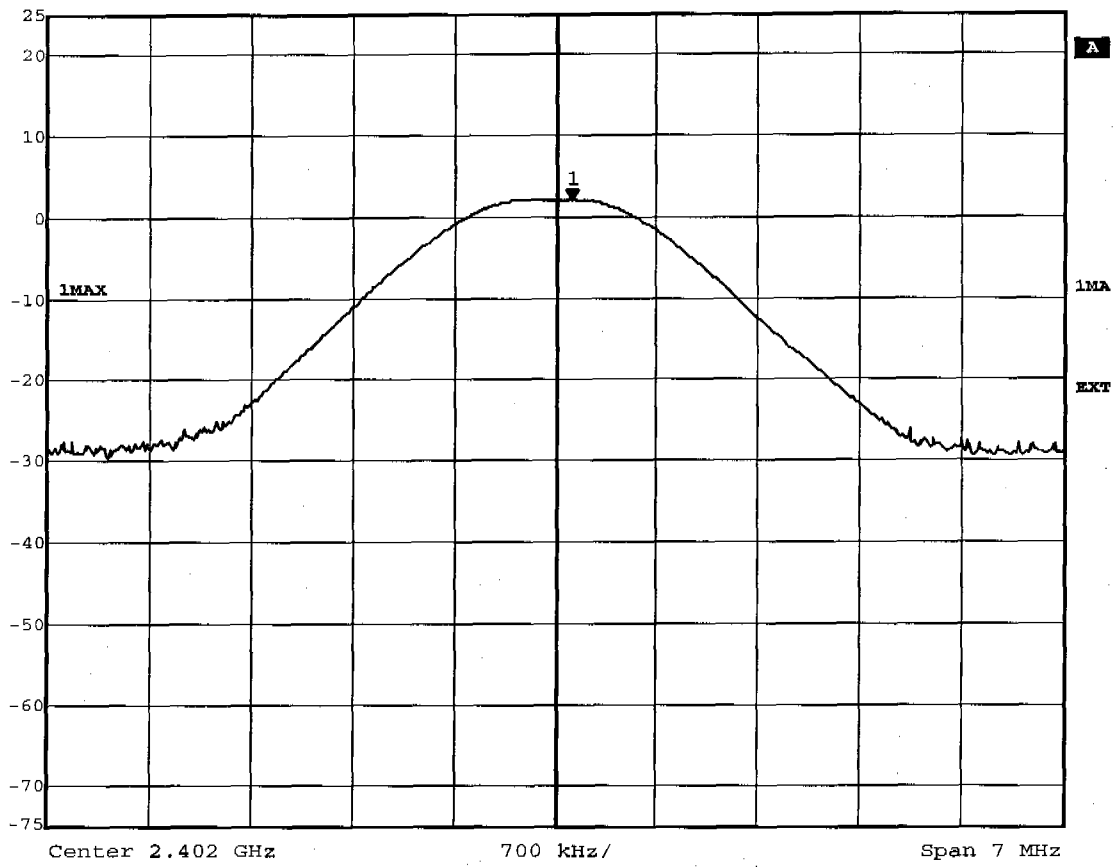

Title: Peak Output Power conducted Ch.: 0
Comment A: Jabra A-210
Date: 15.JUL.2004 15:41:15




Marker 1 [T1]	RBW	1 MHz	RF Att	50 dB
Ref Lvl	1.82 dBm	VBW	1 MHz	
25 dBm	2.44116132 GHz	SWT	5 ms	Unit dBm

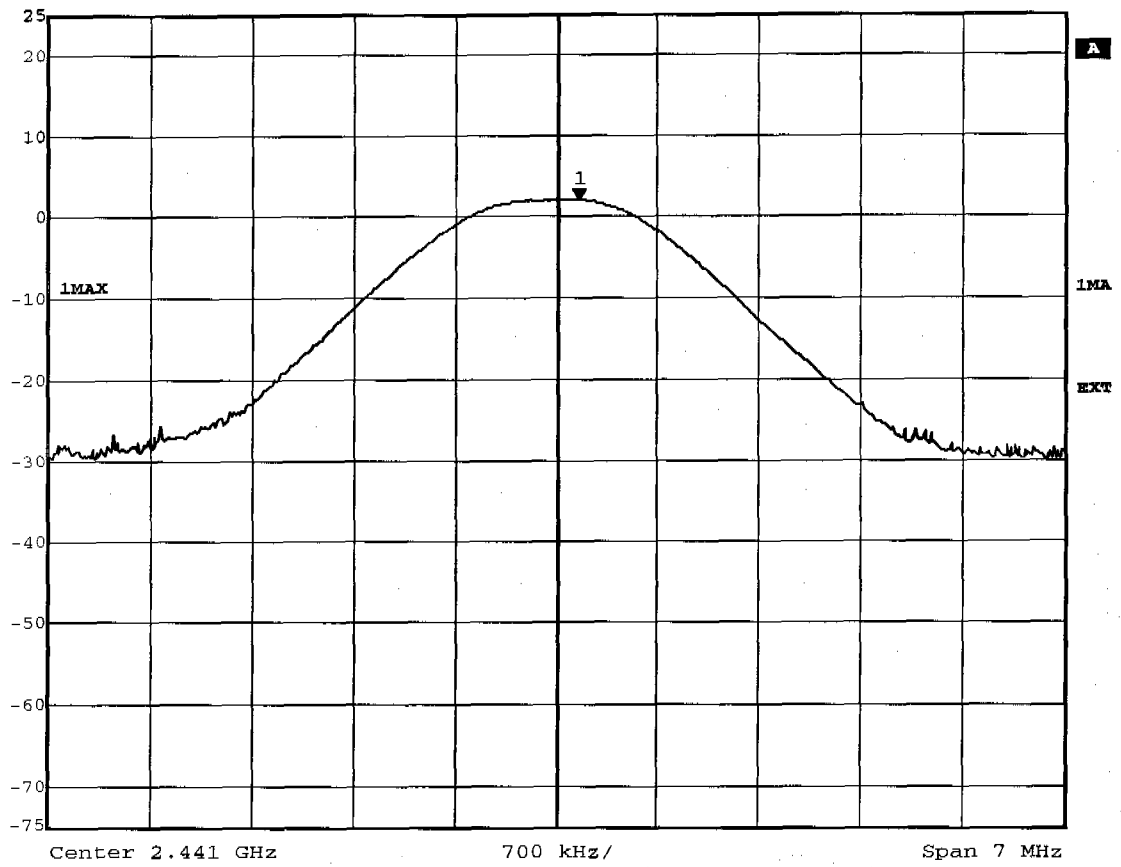

Title: Peak Output Power conducted Ch.: 39
Comment A: Jabra A-210
Date: 15.JUL.2004 15:49:20




Marker 1 [T1]	RBW	1 MHz	RF Att	50 dB
Ref Lvl	1.54 dBm	VBW	1 MHz	
25 dBm	2.48006313 GHz	SWT	5 ms	Unit dBm

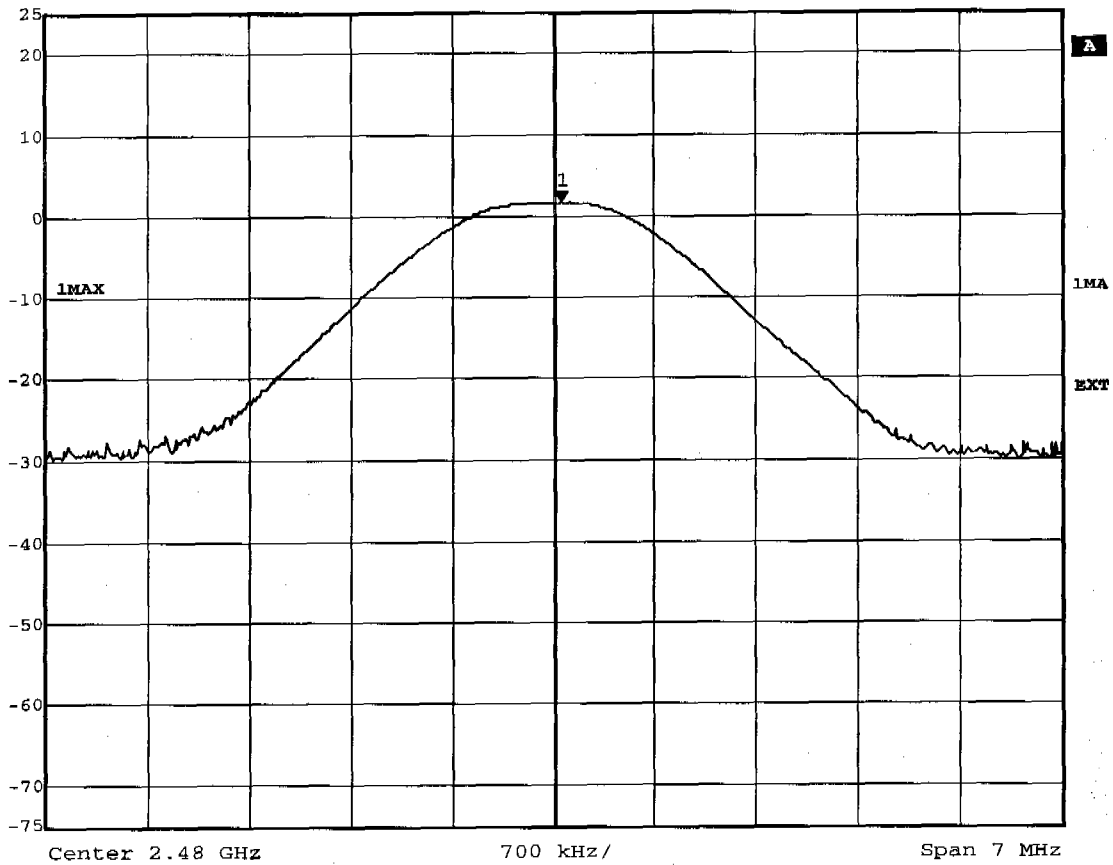

Title: Peak Output Power conducted Ch.: 78
Comment A: Jabra A-210
Date: 15.JUL.2004 15:48:16


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2402 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: -7.73dBm, RBW: 5MHz

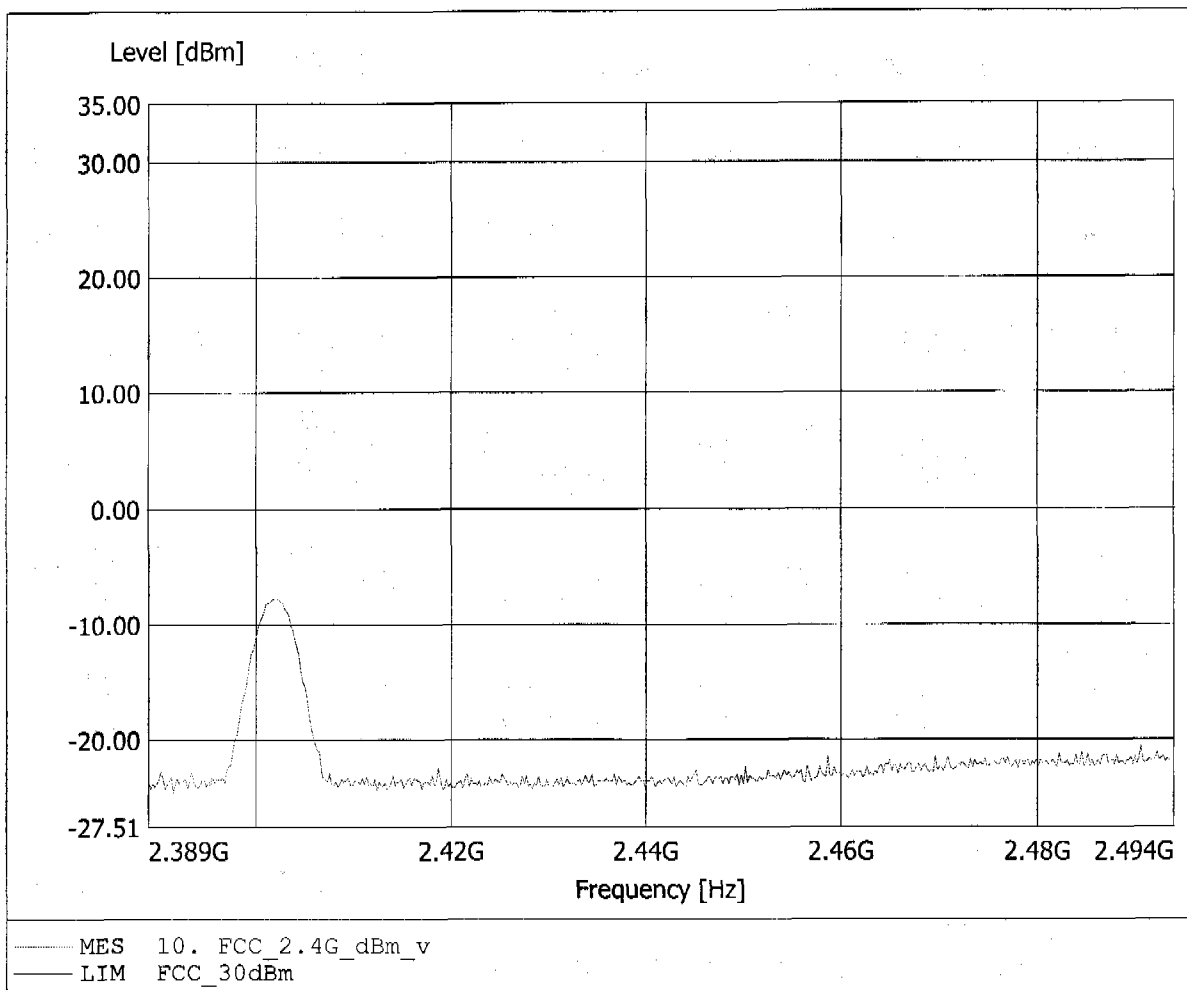


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom A/S
 EUT : Bluetooth Headset 2402 MHz
 Model: Jabra A - 210
 Test Site / Operator: ETS / Mr. Pudell
 Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
 Test Specification: according to §15.247
 Comment 1: Dist.: 3m, Ant.: BBHA9120D
 Comment 2: Freq: 2.402GHz, Pmax: 3.43dBm, RBW: 5MHz

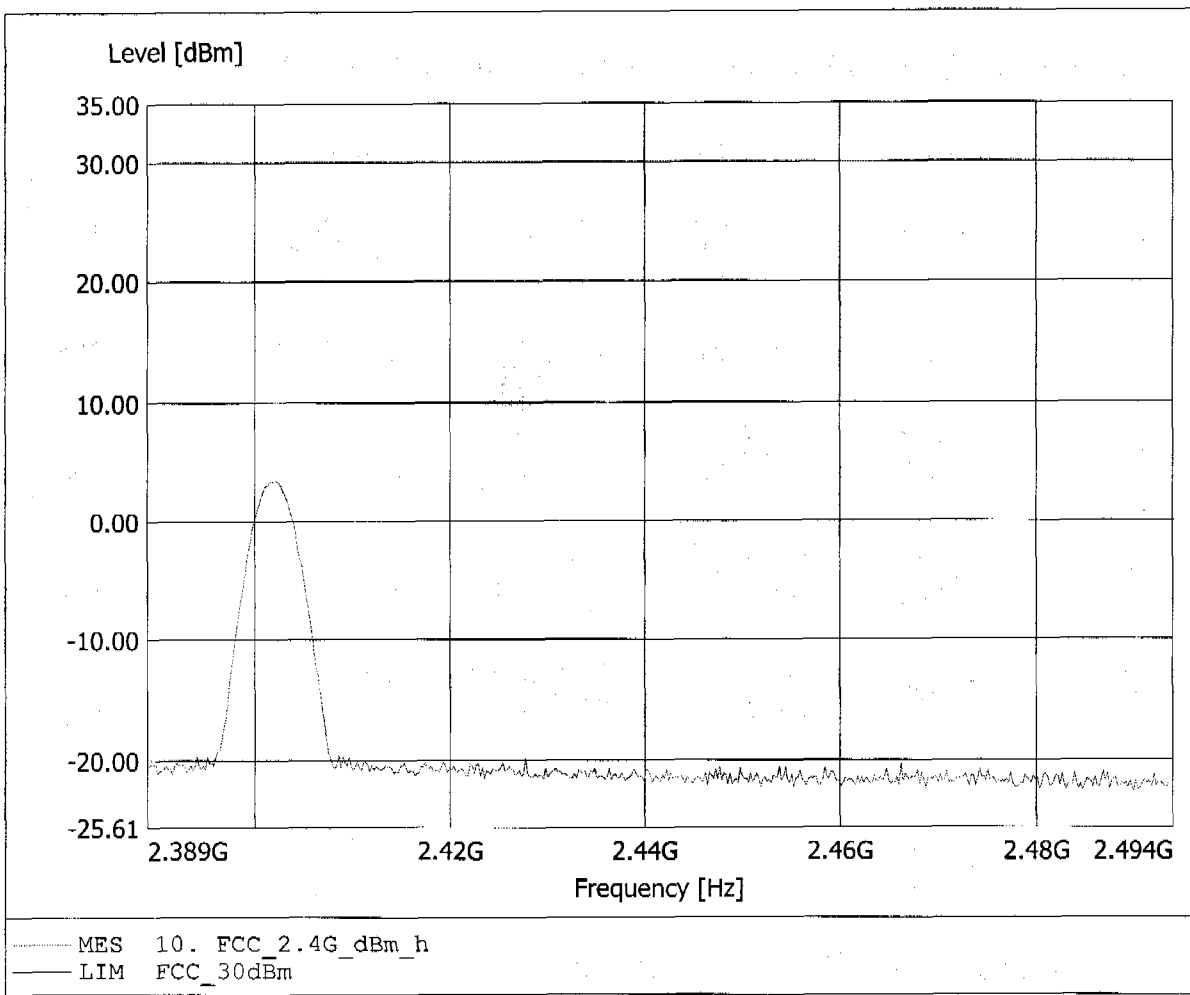


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2441 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -8.11dBm, RBW: 5MHz

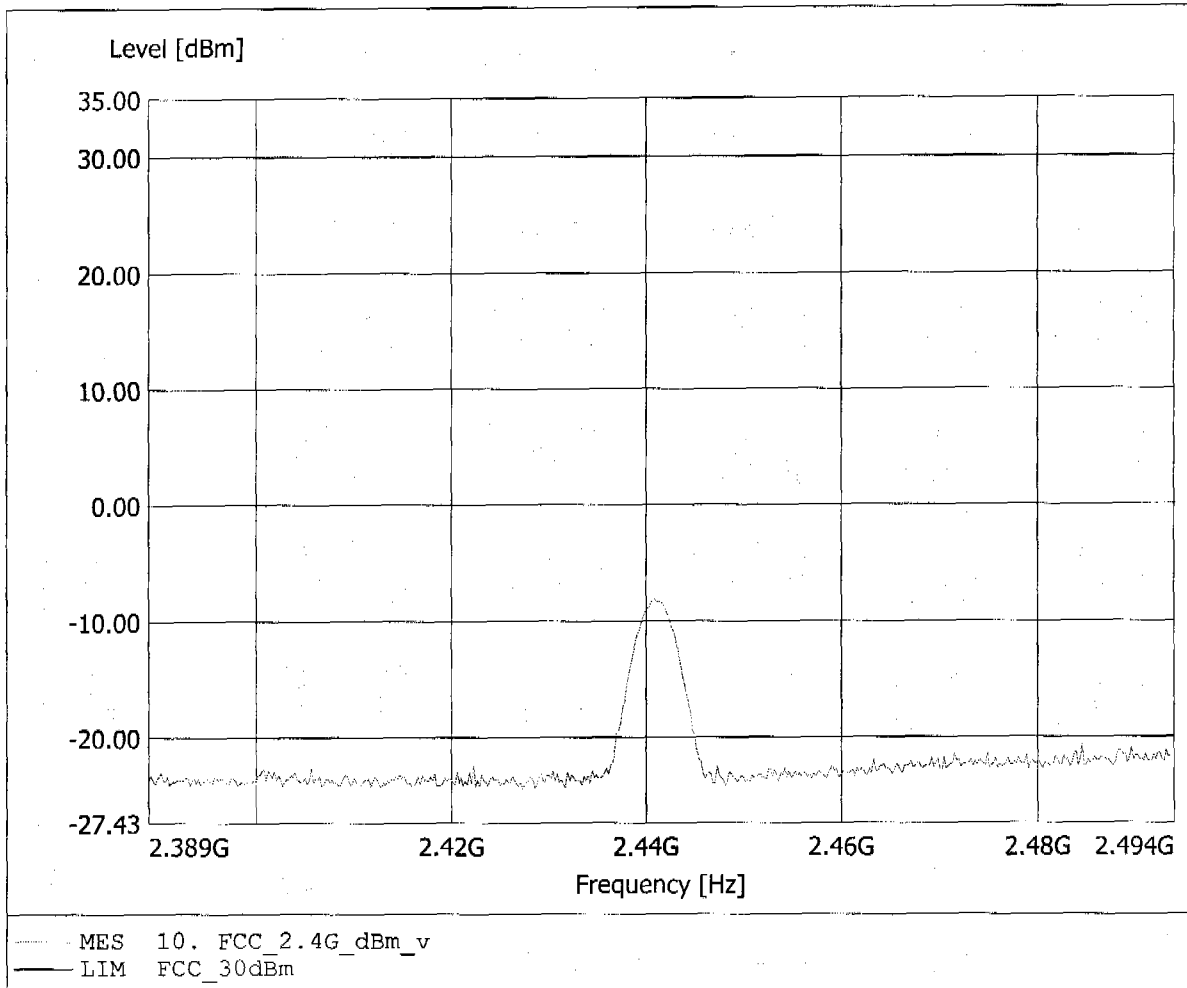


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2441 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: 2.53dBm, RBW: 5MHz

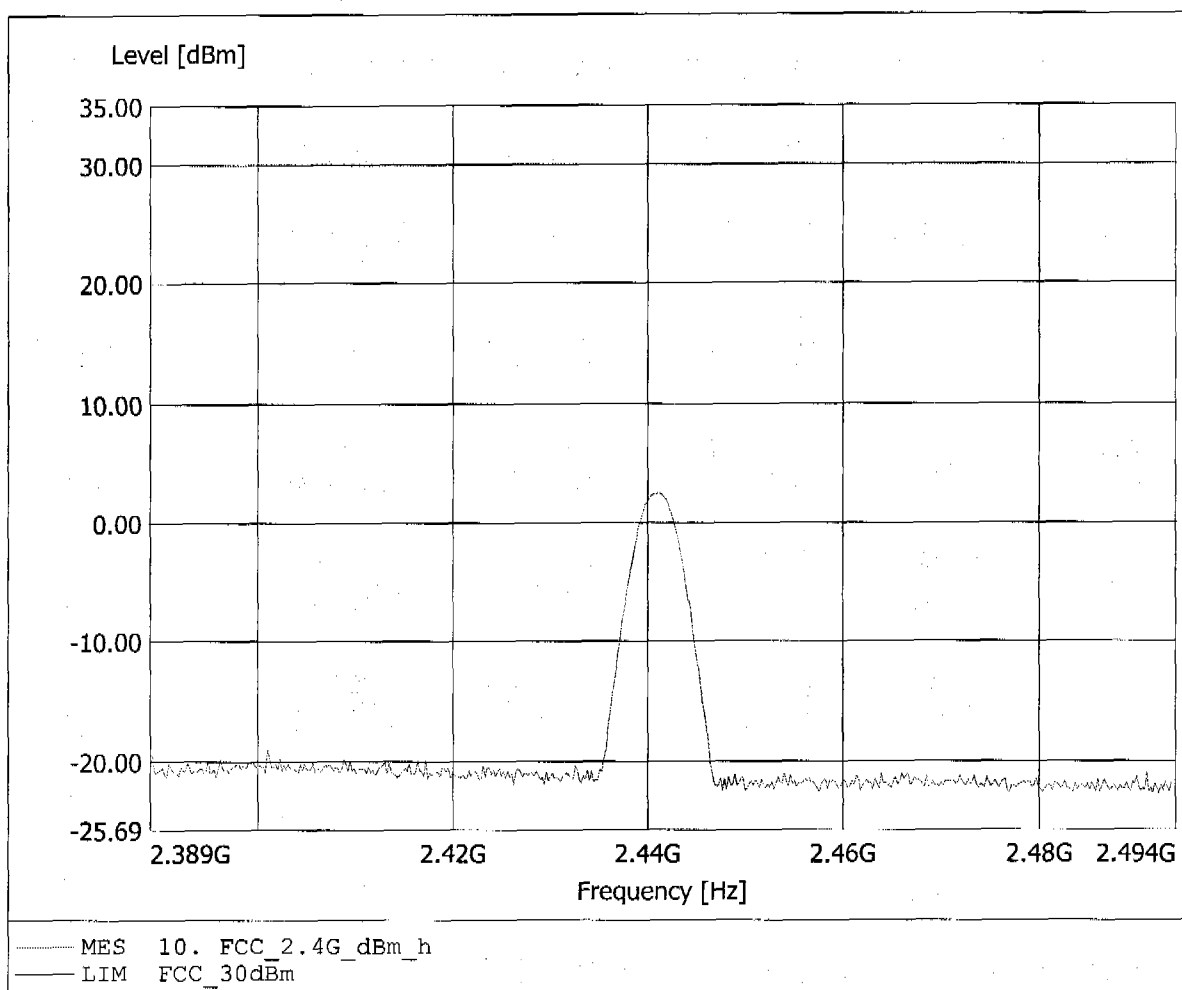


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2480 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: -6.34dBm, RBW: 5MHz

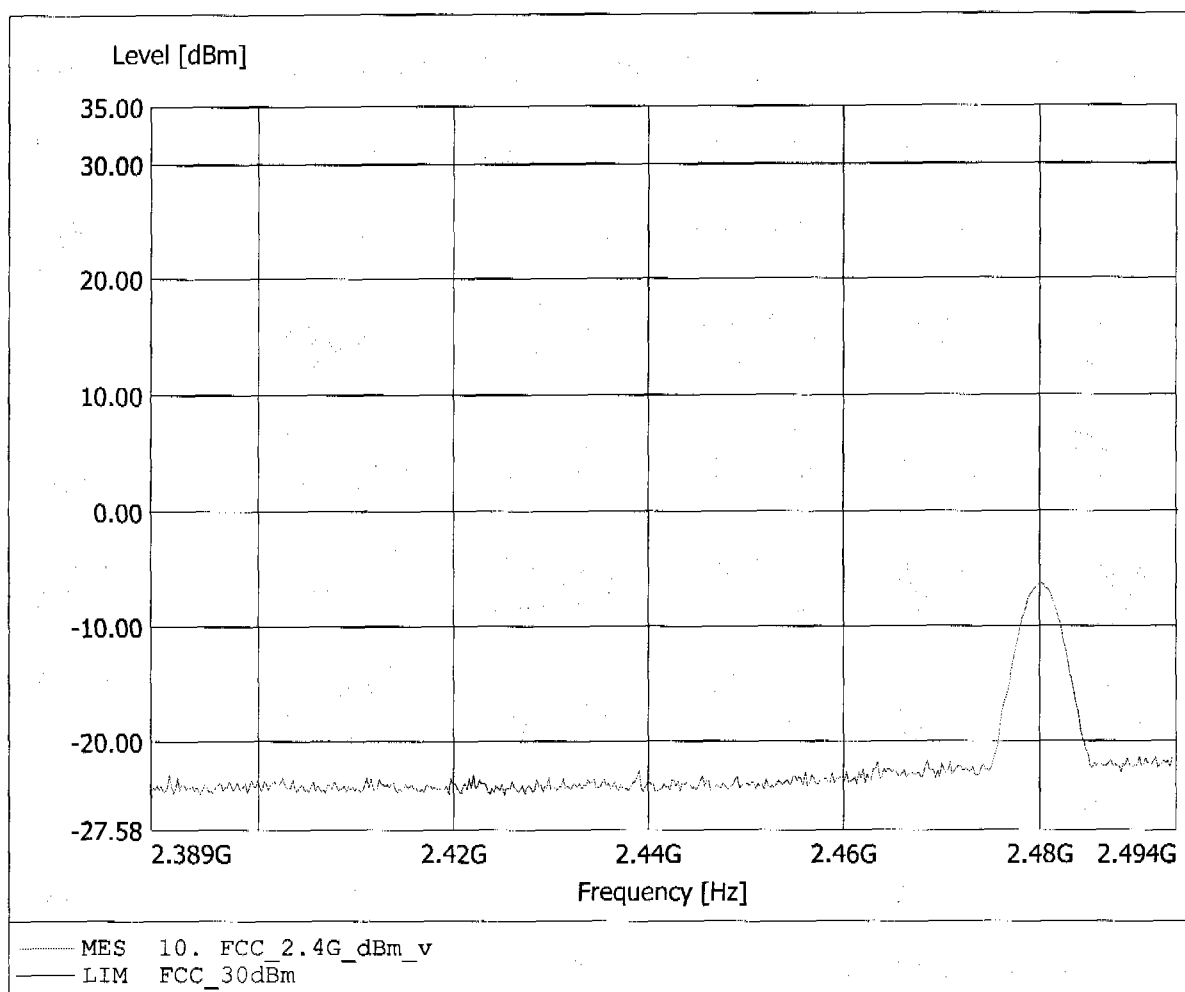


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2480 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: 0.46dBm, RBW: 5MHz

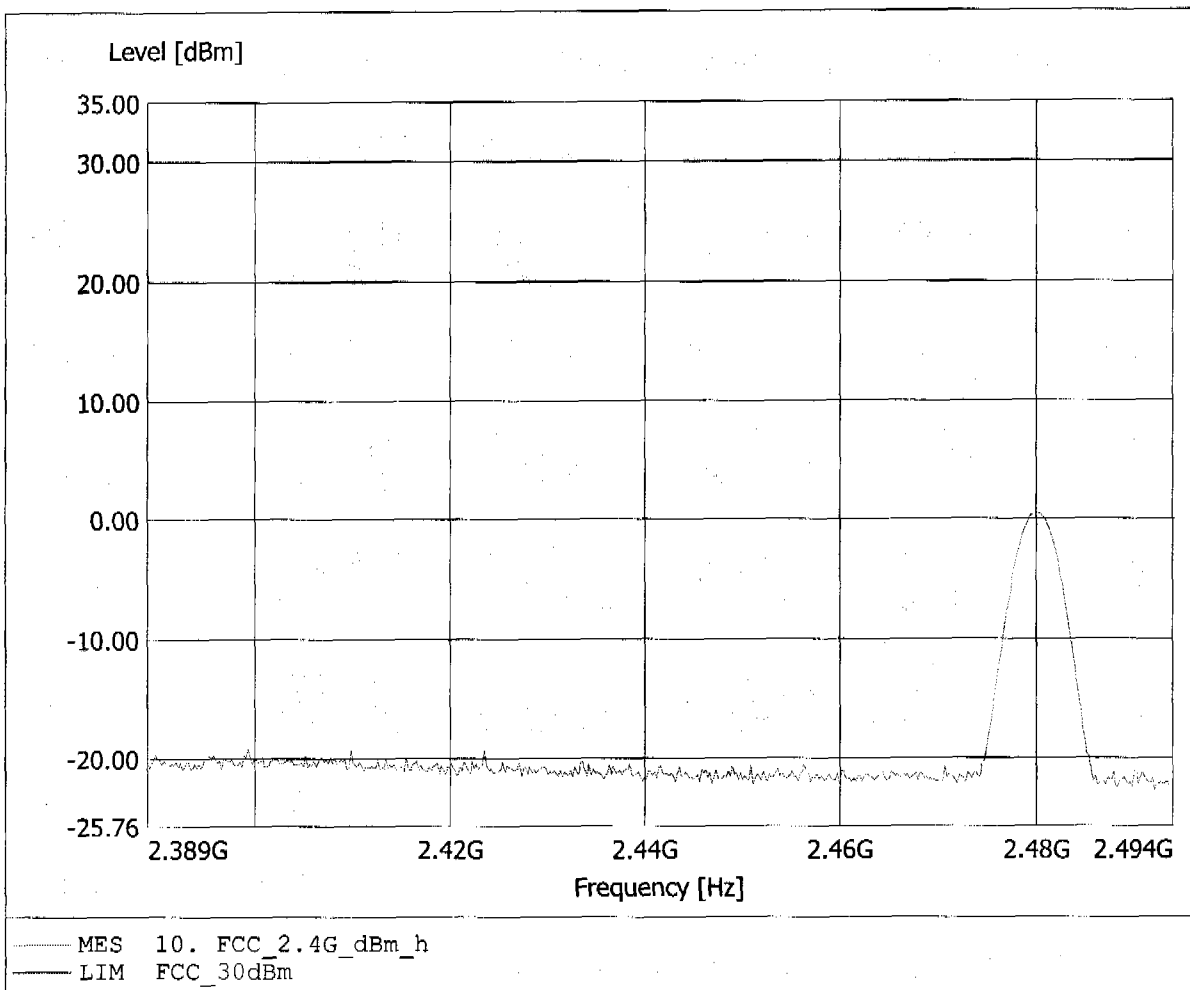


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2402 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Umin: 3,7 V DC add. 120V -15% AC Adapter
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: -7.80dBm, RBW: 5MHz

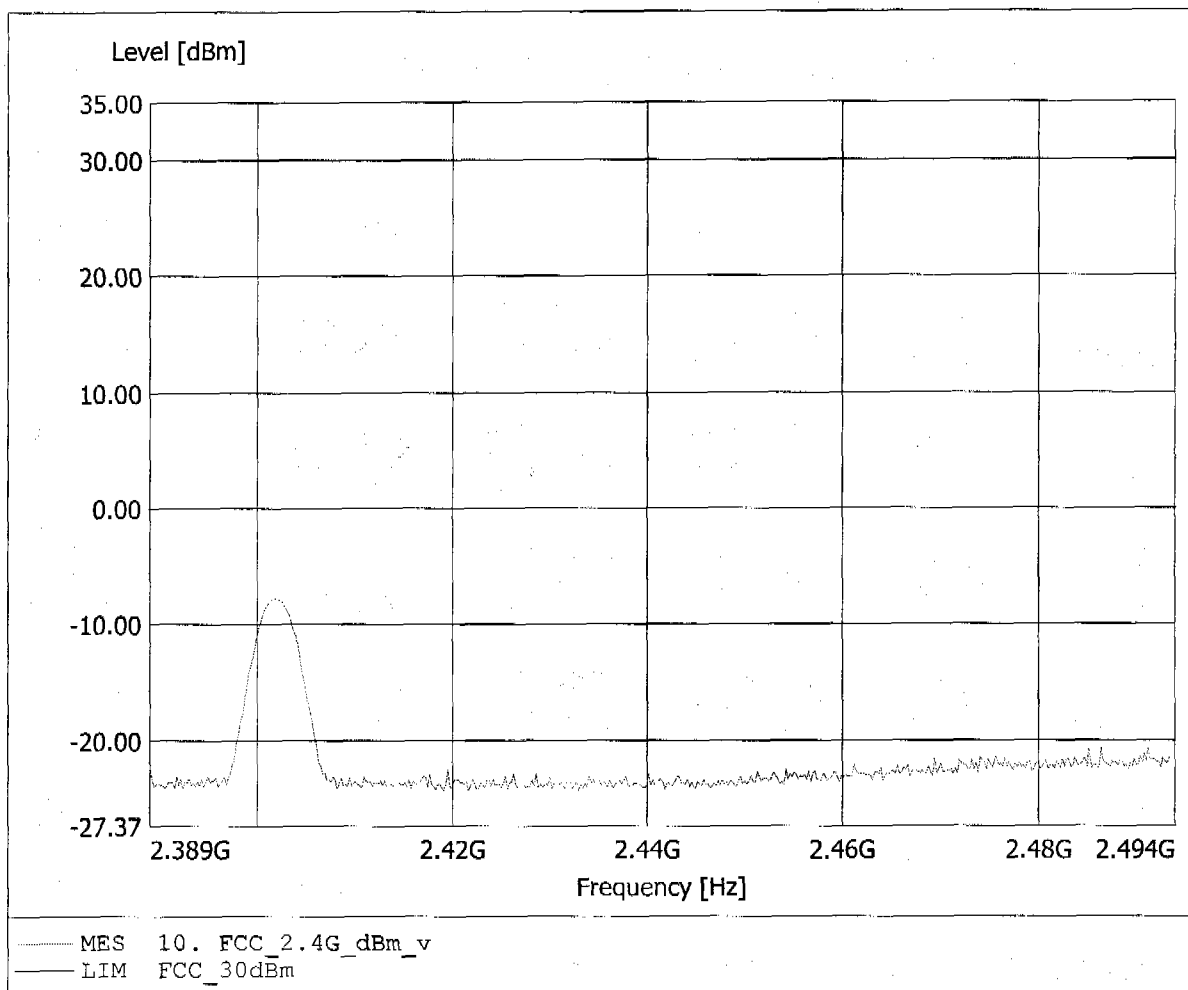


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2402 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Umin: 3,7 V DC add. 120V -15% AC Adapter
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: 3.22dBm, RBW: 5MHz

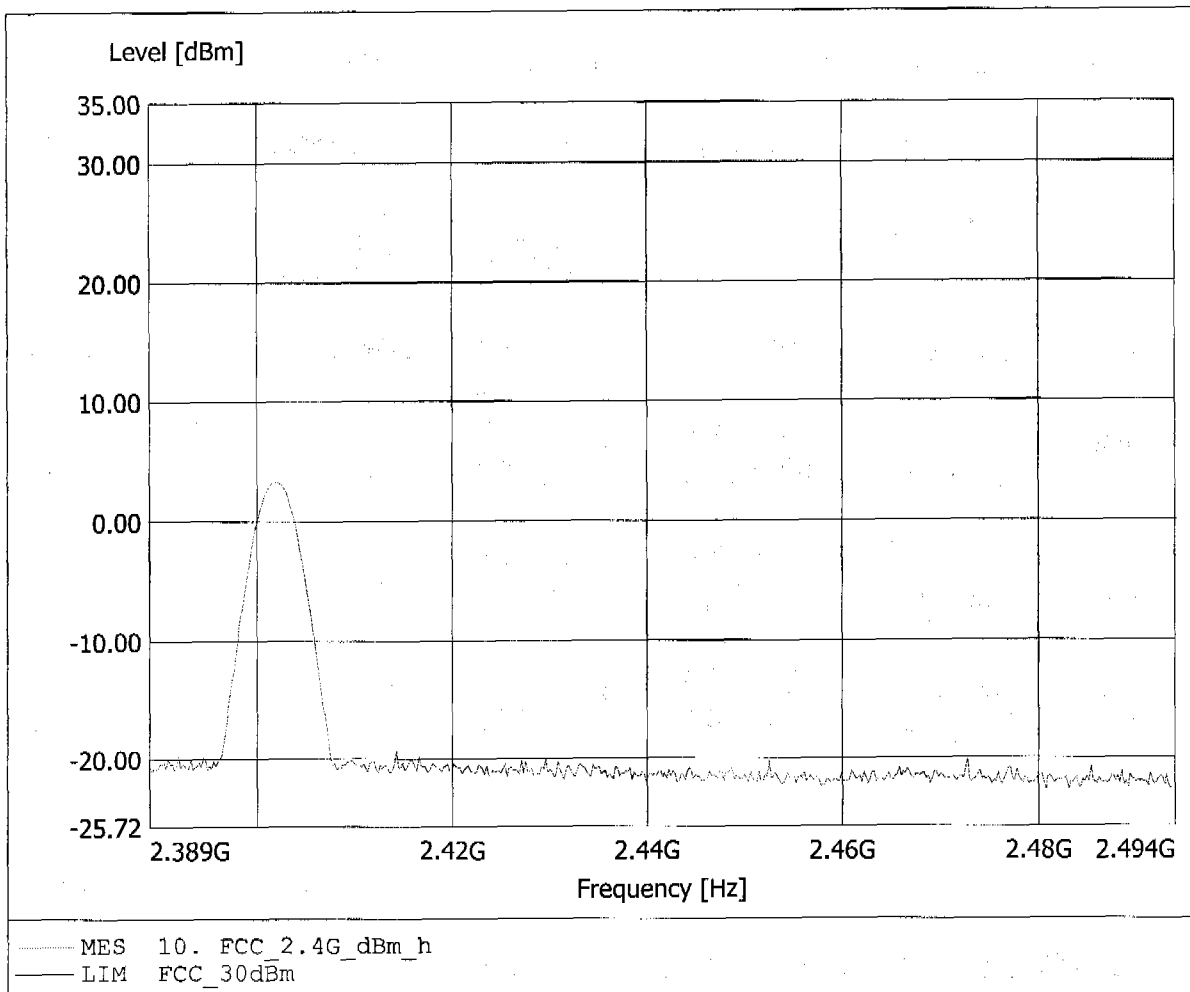


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2441 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Umin: 3,7 V DC add. 120V -15% AC Adapter
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -7.96dBm, RBW: 5MHz

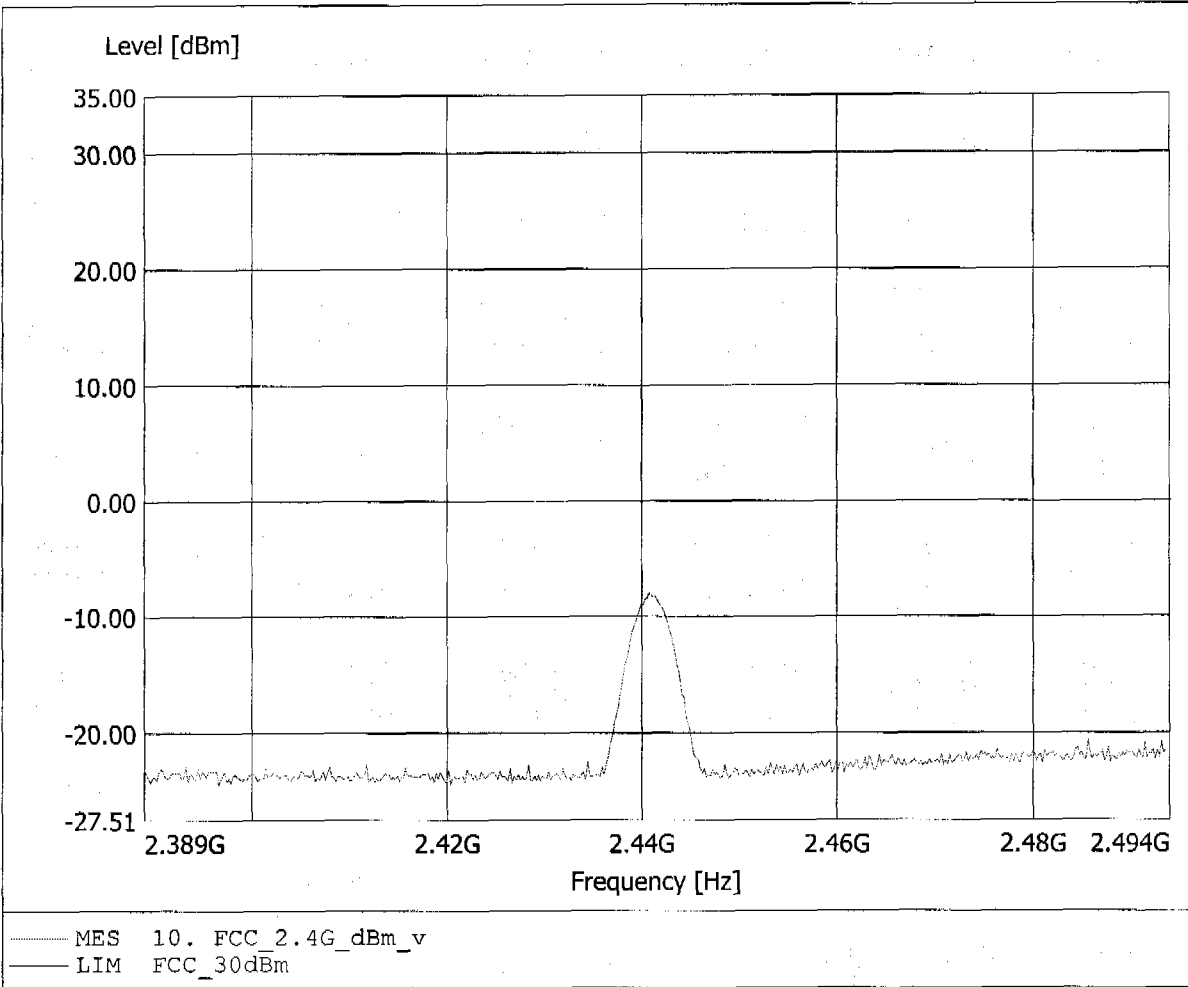


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2441 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Umin: 3,7 V DC add. 120V -15% AC Adapter
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: 2.47dBm, RBW: 5MHz

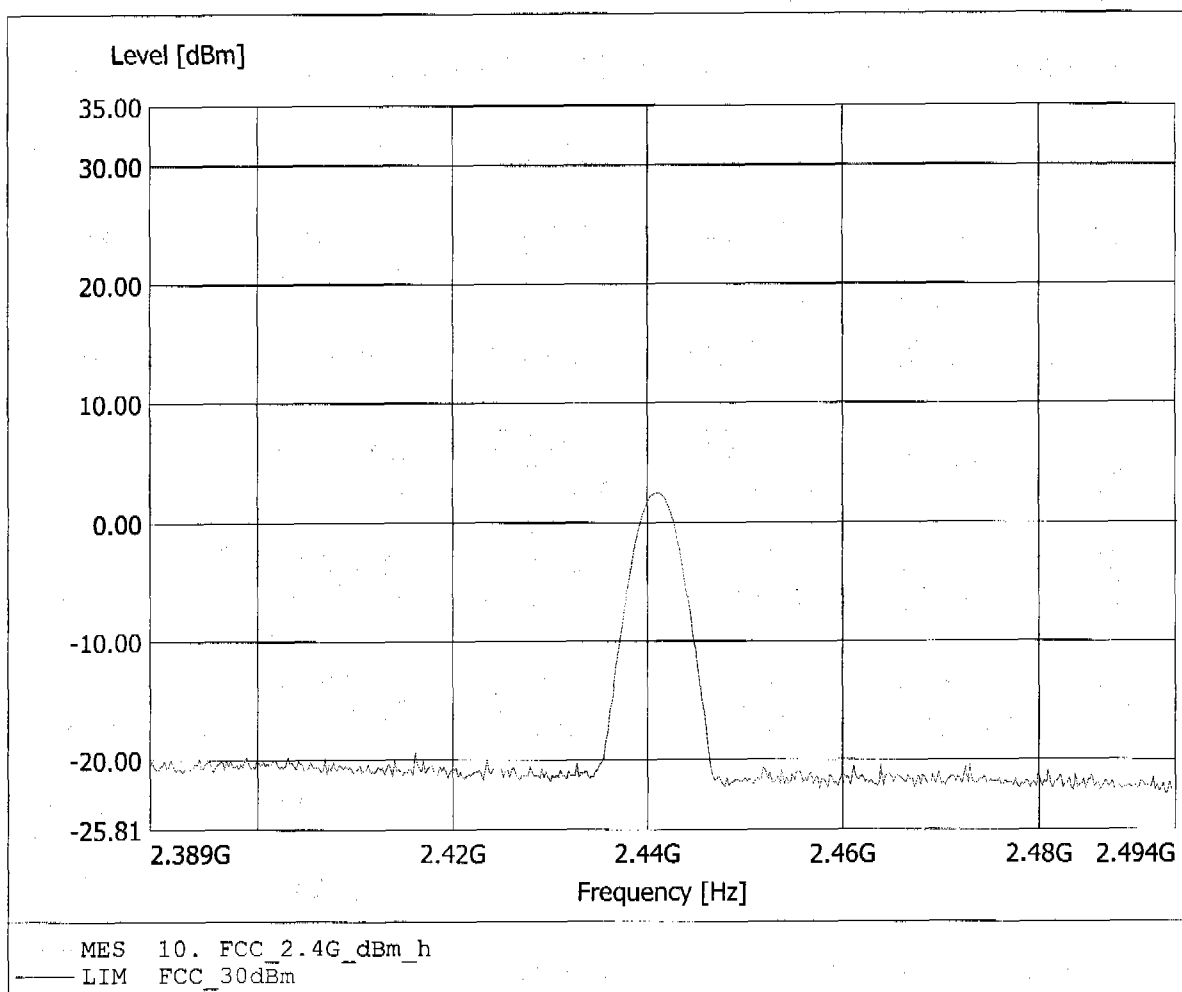


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2480 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Umin: 3,7 V DC add. 120V -15% AC Adapter
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: -6.88dBm, RBW: 5MHz

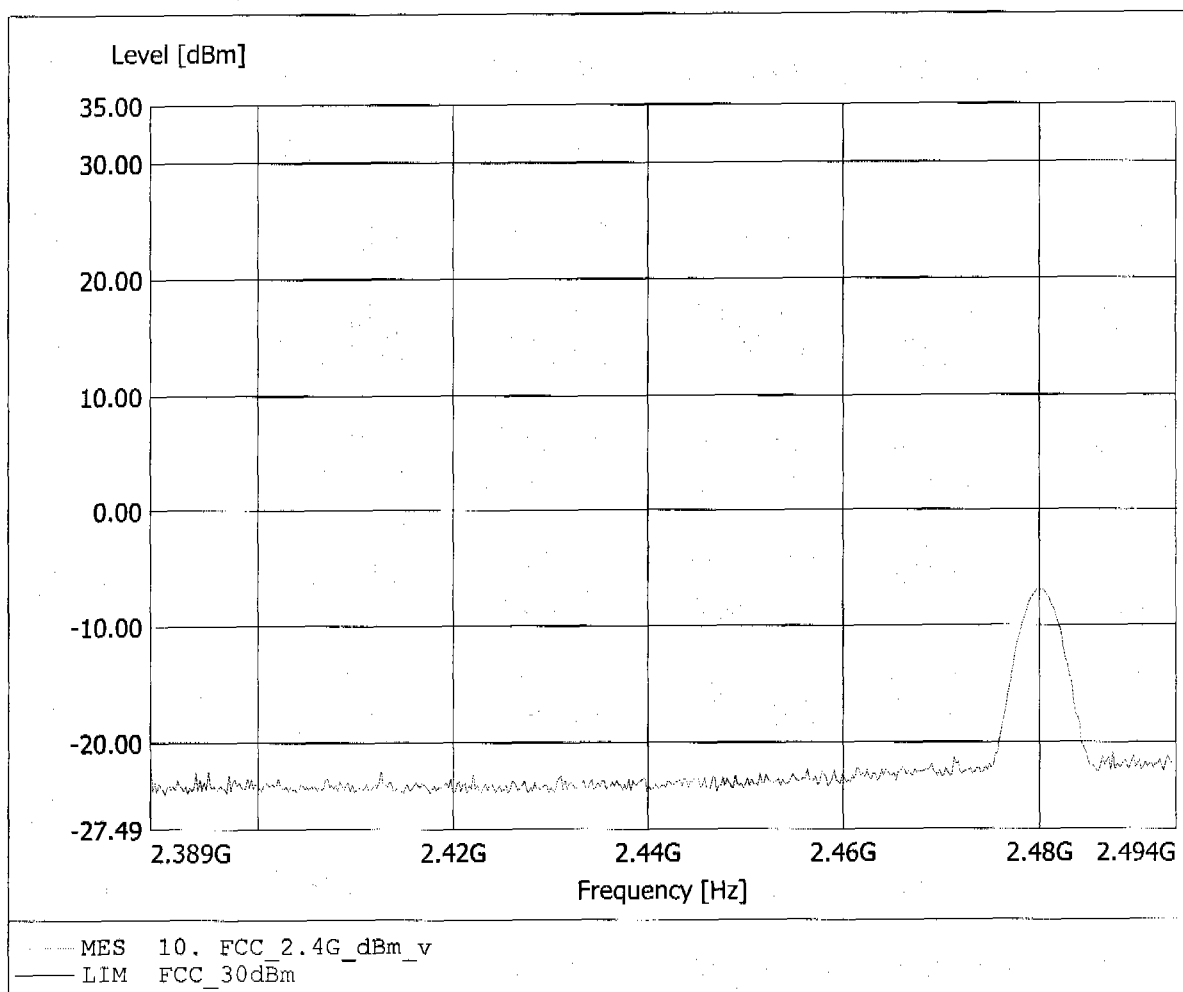


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2480 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Umin: 3,7 V DC add. 120V -15% AC Adapter
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: 0.50dBm, RBW: 5MHz

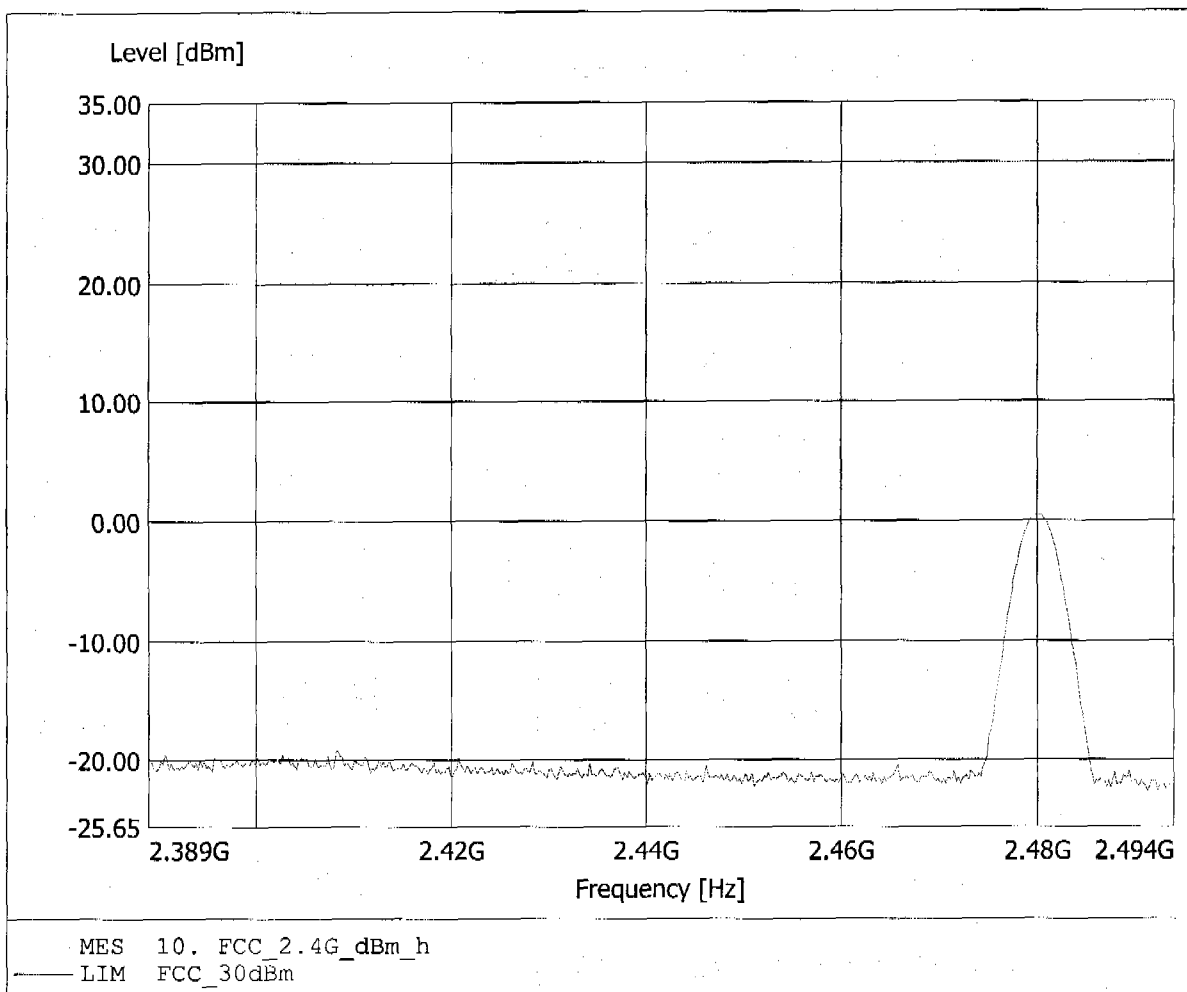


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2402 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Umax: 3,7 V DC add. 120V +15% AC Adapter
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: -7.68dBm, RBW: 5MHz

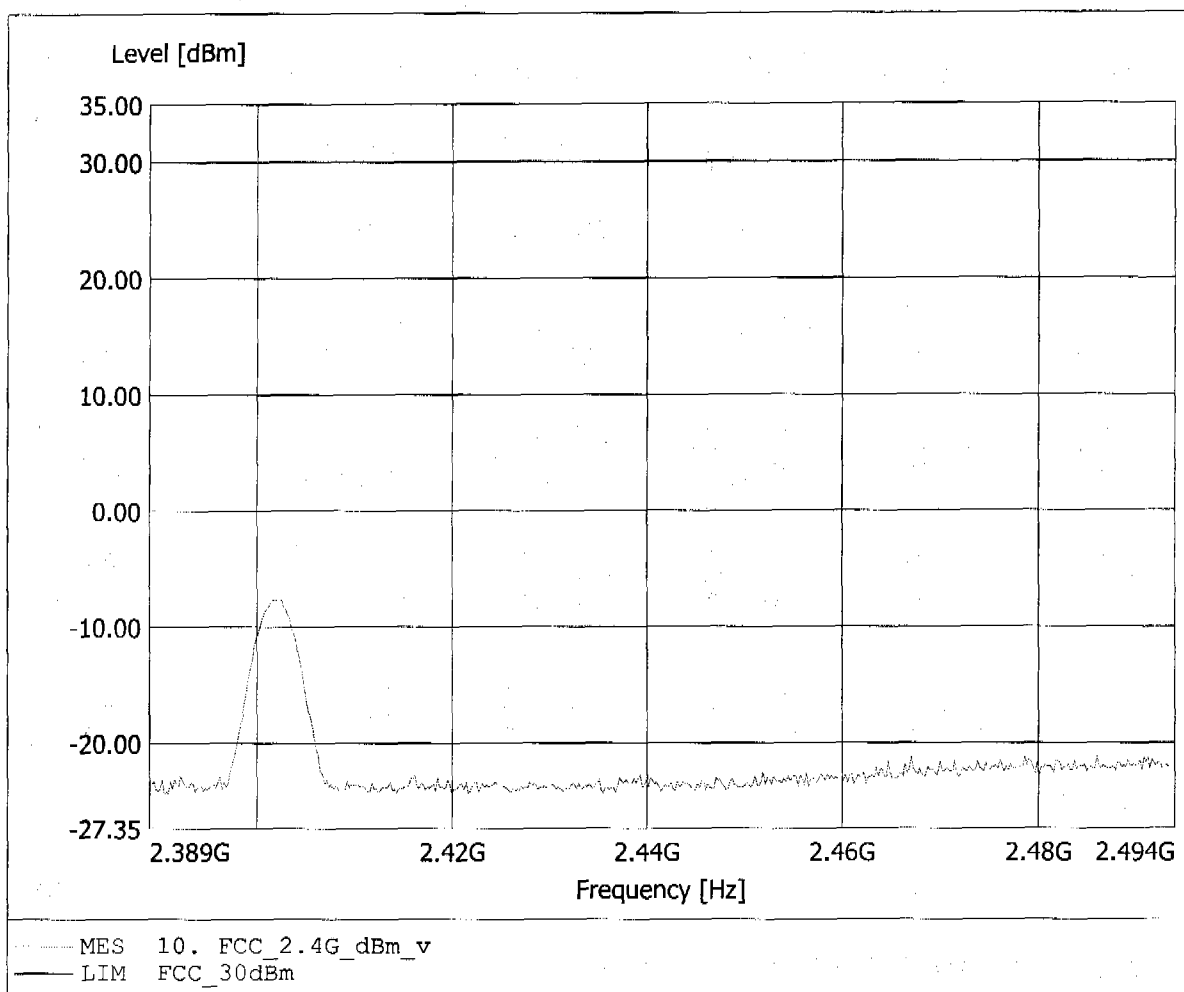


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom A/S
 EUT : Bluetooth Headset 2402 MHz
 Model: Jabra A - 210
 Test Site / Operator: ETS / Mr. Pudell
 Temperature/ Voltage: 25°C / Umax: 3,7 V DC add. 120V +15% AC Adapter
 Test Specification: according to §15.247
 Comment 1: Dist.: 3m, Ant.: BBHA9120D
 Comment 2: Freq: 2.402GHz, Pmax: 3.23dBm, RBW: 5MHz

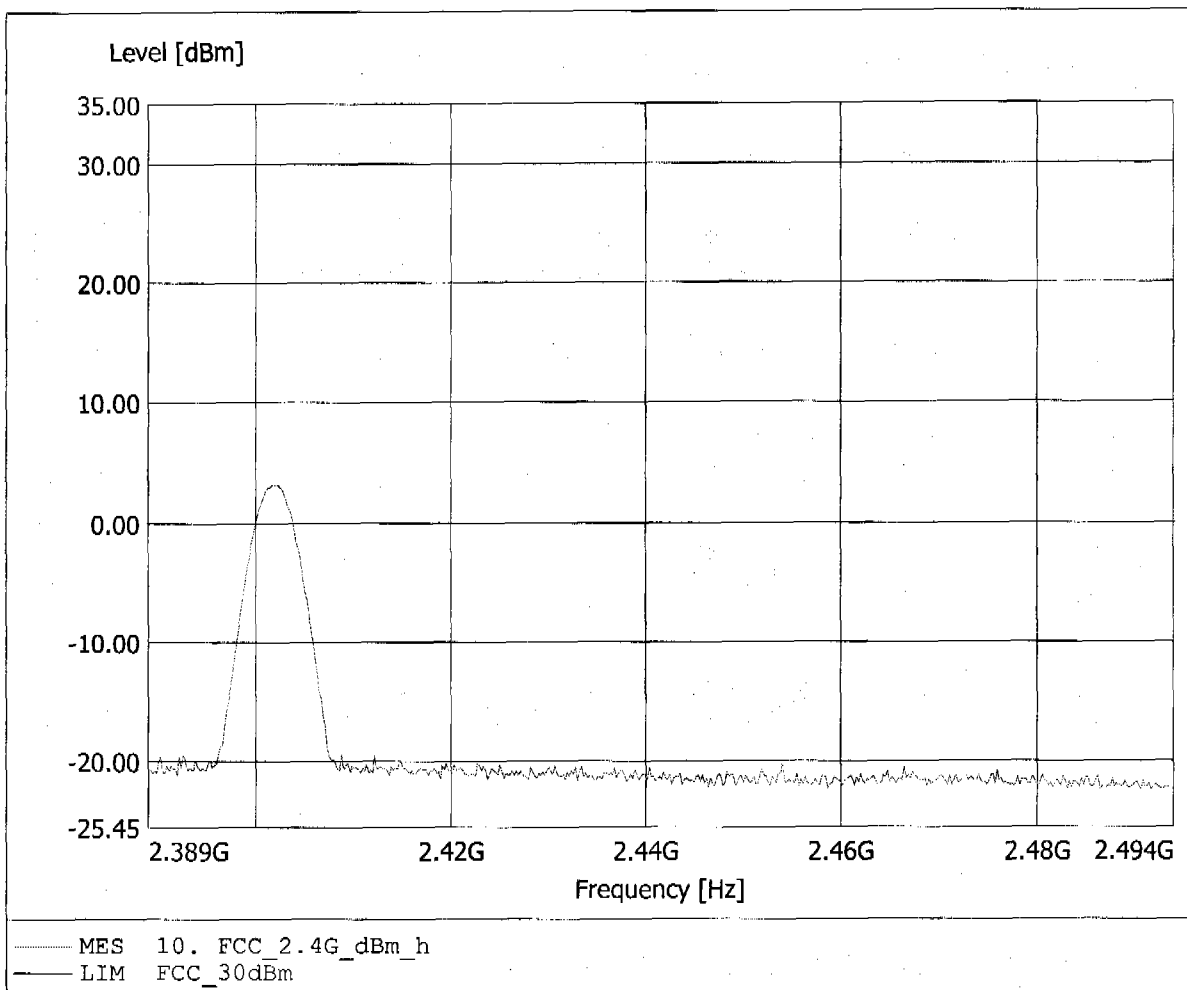


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2441 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Umax: 3,7 V DC add. 120V +15% AC Adapter
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -8.24dBm, RBW: 5MHz

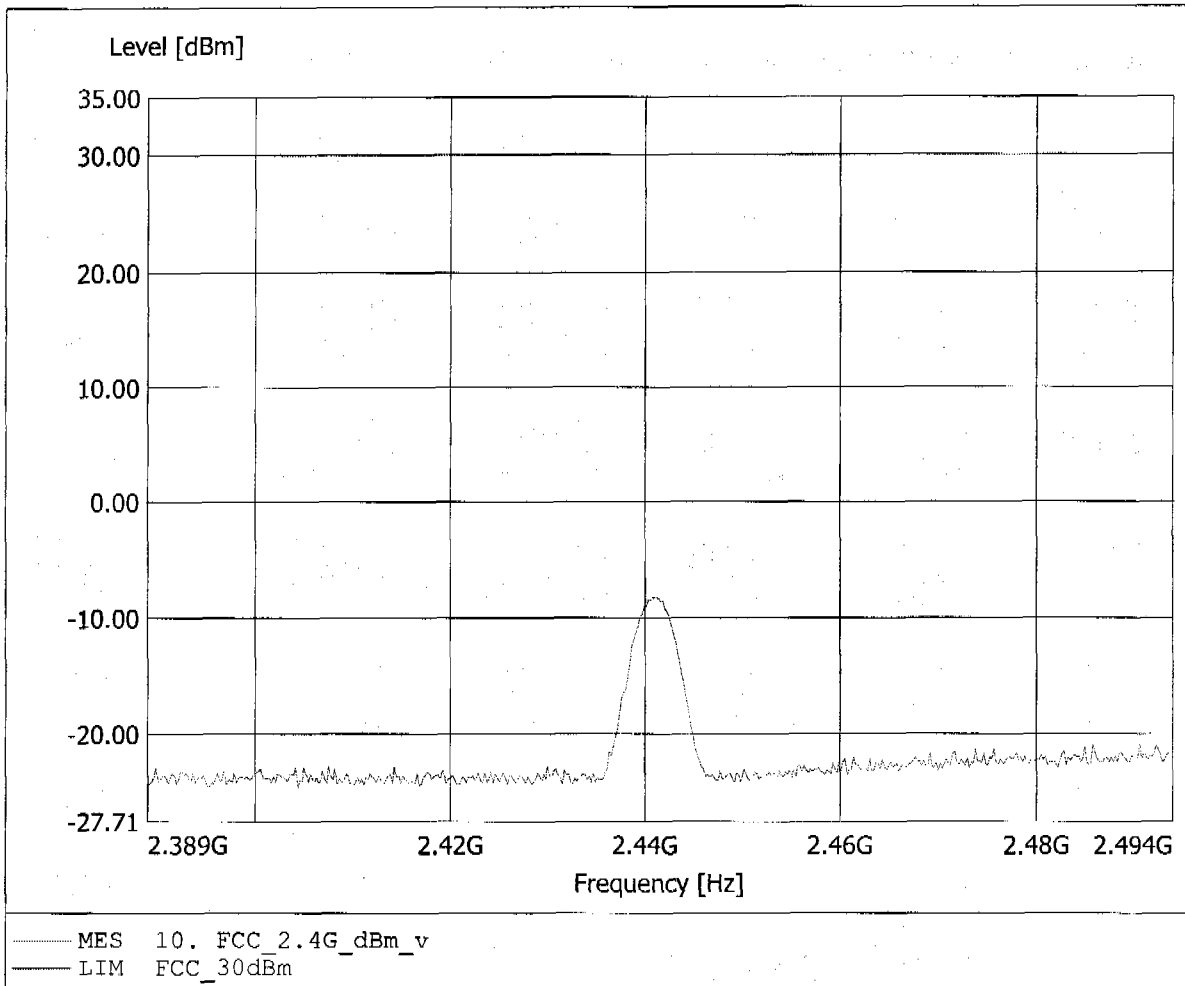


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom A/S
 EUT : Bluetooth Headset 2441 MHz
 Model: Jabra A - 210
 Test Site / Operator: ETS / Mr. Pudell
 Temperature/ Voltage: 25°C / Umax: 3,7 V DC add. 120V +15% AC Adapter
 Test Specification: according to §15.247
 Comment 1: Dist.: 3m, Ant.: BBHA9120D
 Comment 2: Freq: 2.441GHz, Pmax: 2.53dBm, RBW: 5MHz

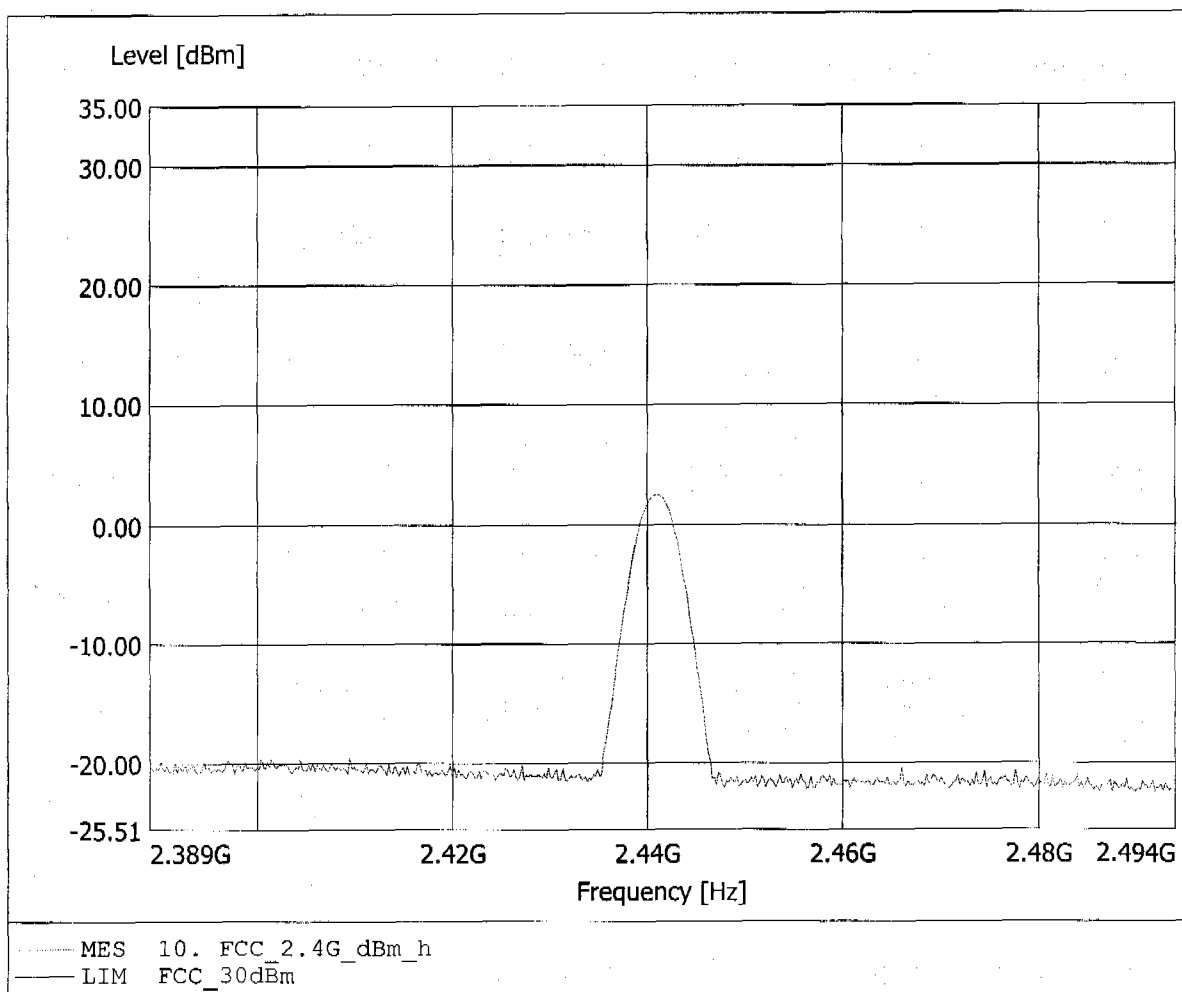


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2480 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Umax: 3,7 V DC add. 120V +15% AC Adapter
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: -6.81dBm, RBW: 5MHz

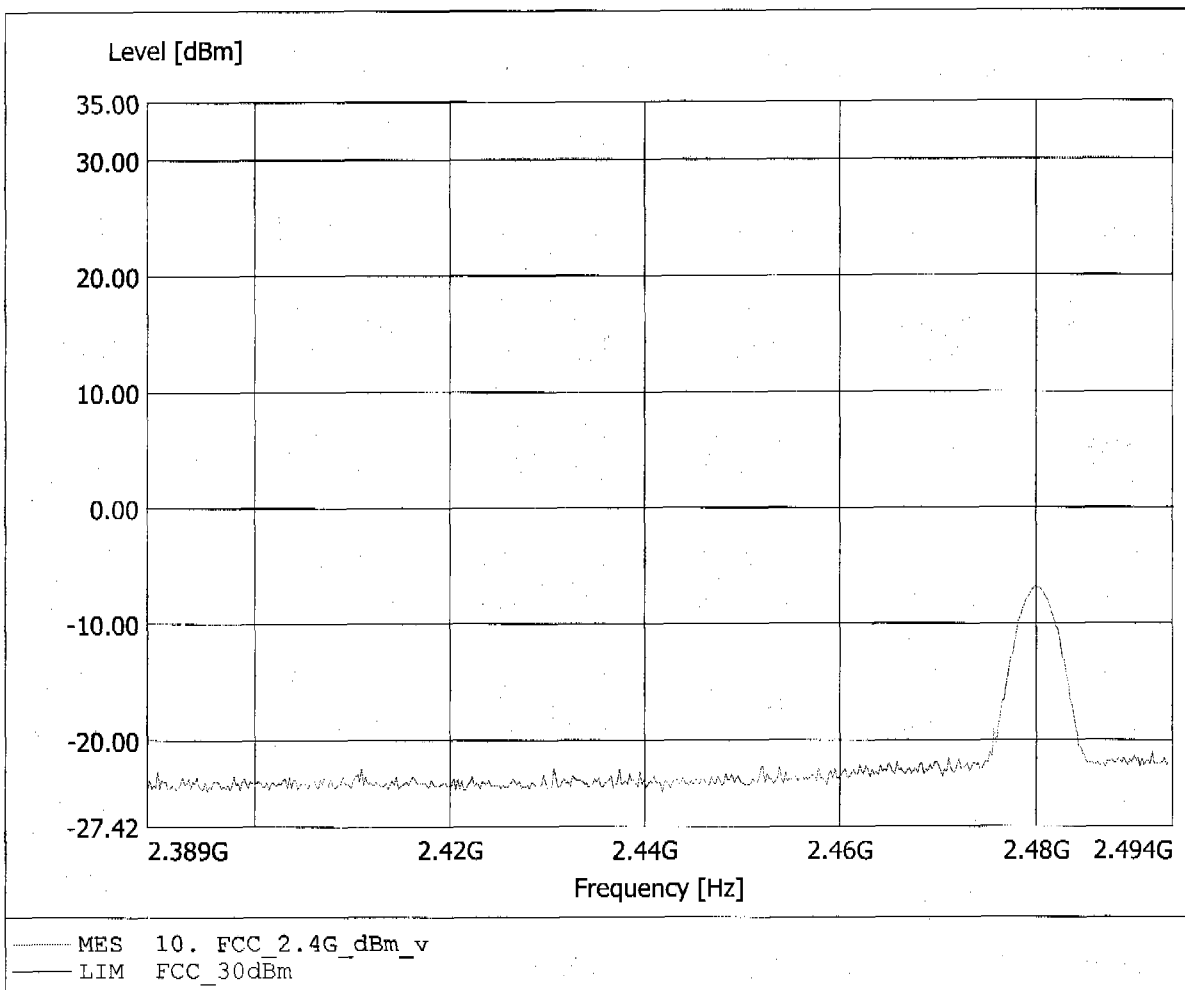

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2480 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Umax: 3,7 V DC add. 120V +15% AC Adapter
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: 0.18dBm, RBW: 5MHz

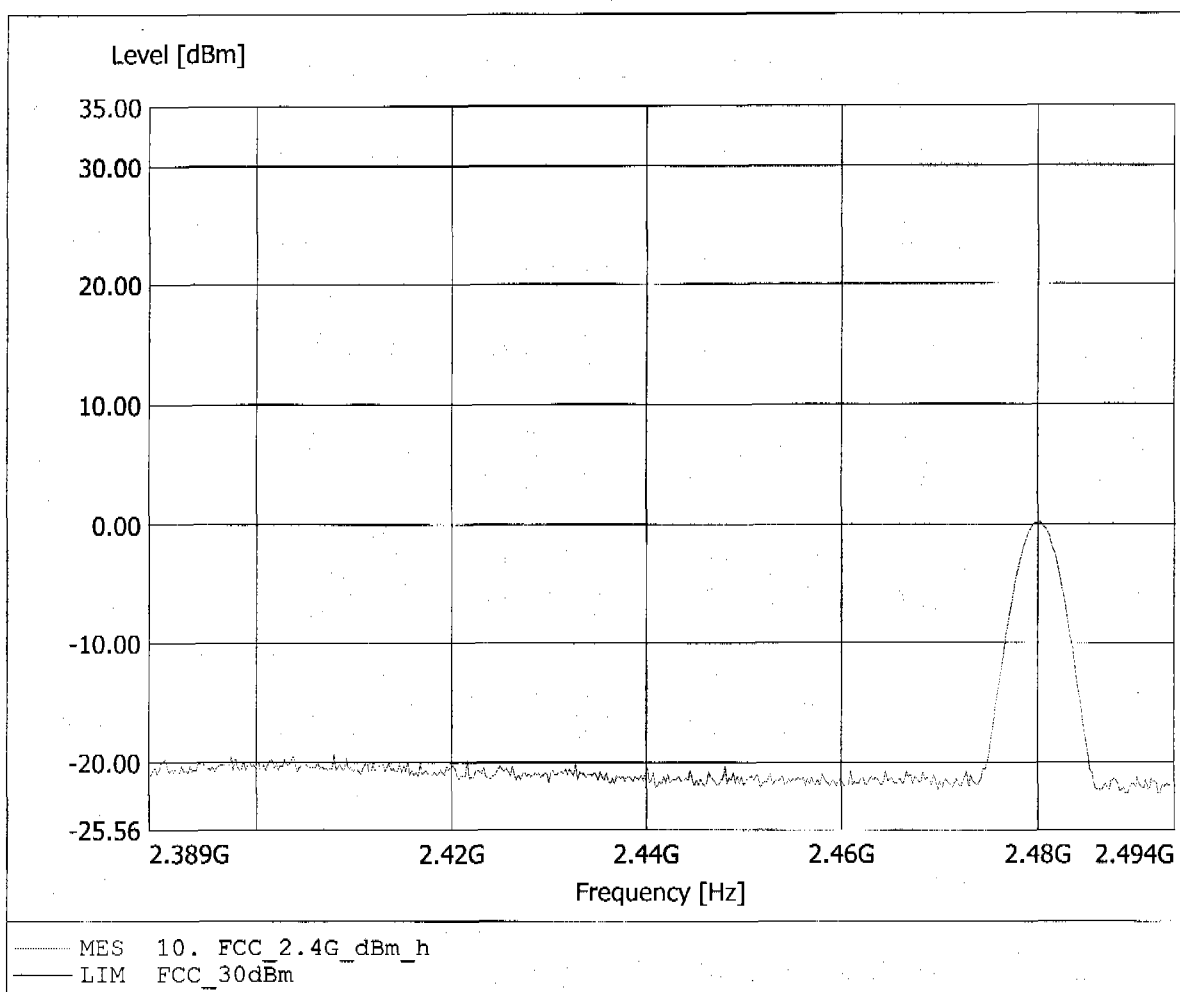




Appendix C

Spurious Emissions radiated - Transmitter operating


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2402 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Emax: 94.48dBµV/m, RBW: 100kHz

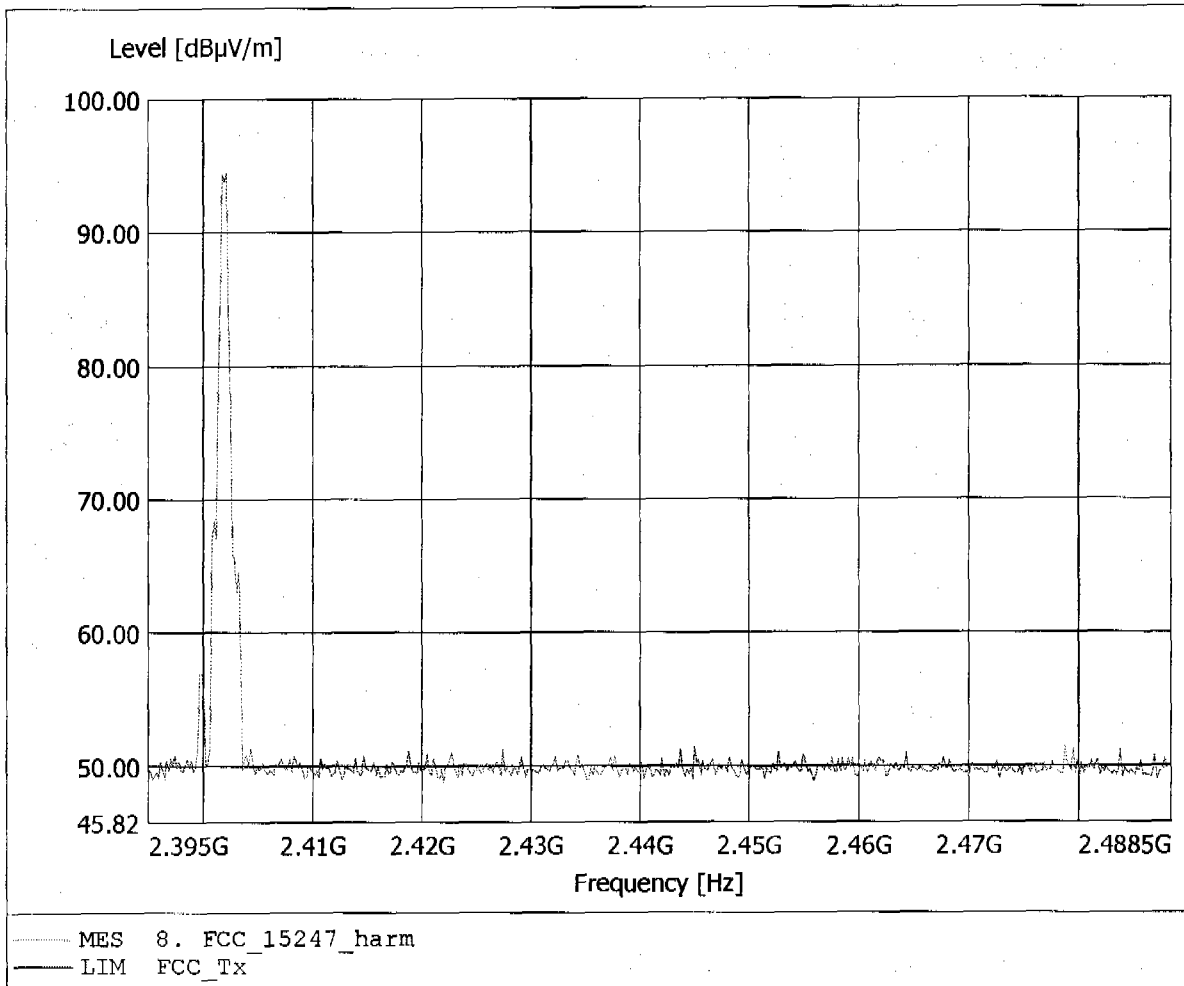


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2402 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 193.868MHz, Emax: 33.69dBµV/m, RBW: 100kHz

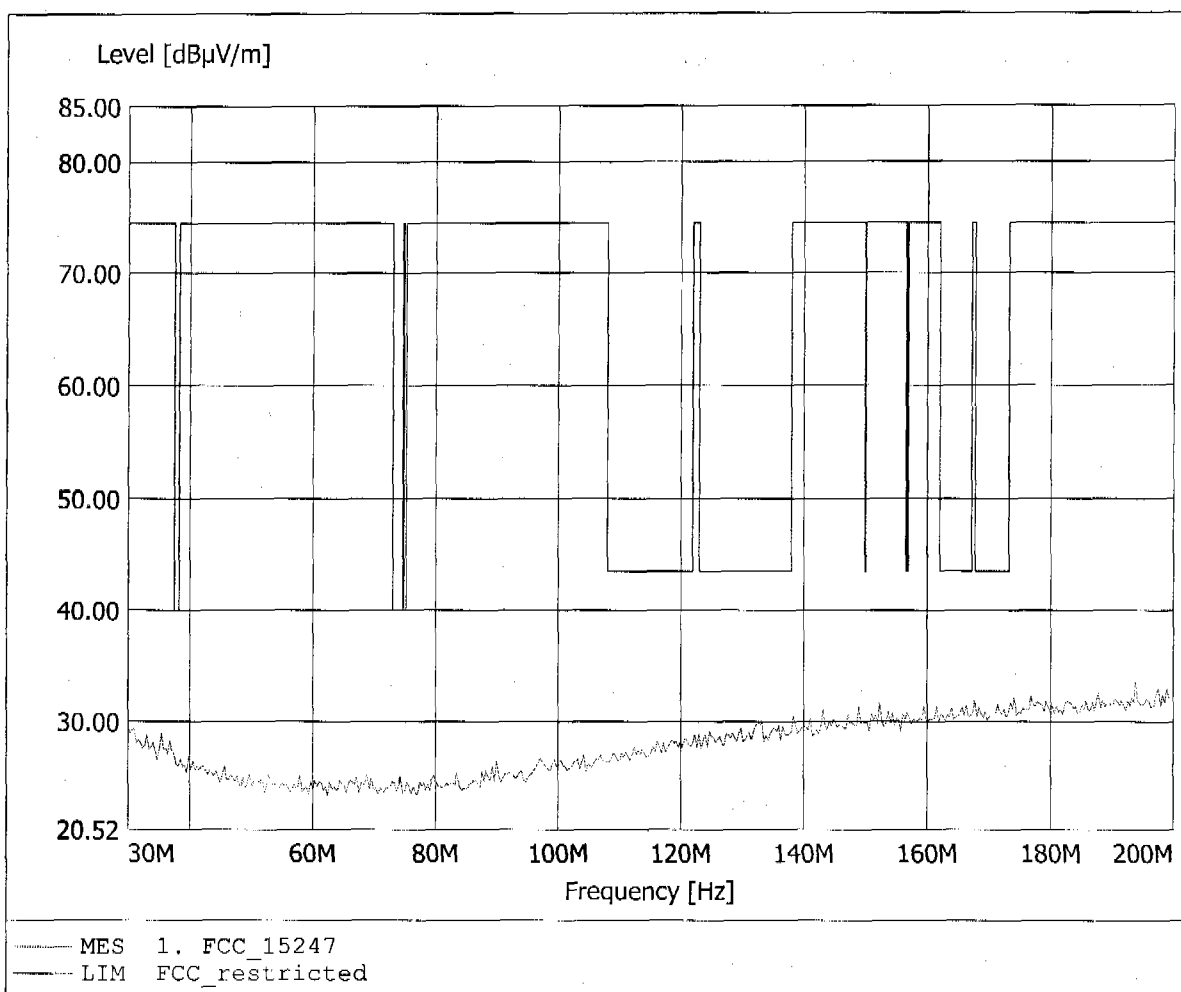


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2402 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 195.230MHz, Emax: 32.45dBµV/m, RBW: 100kHz

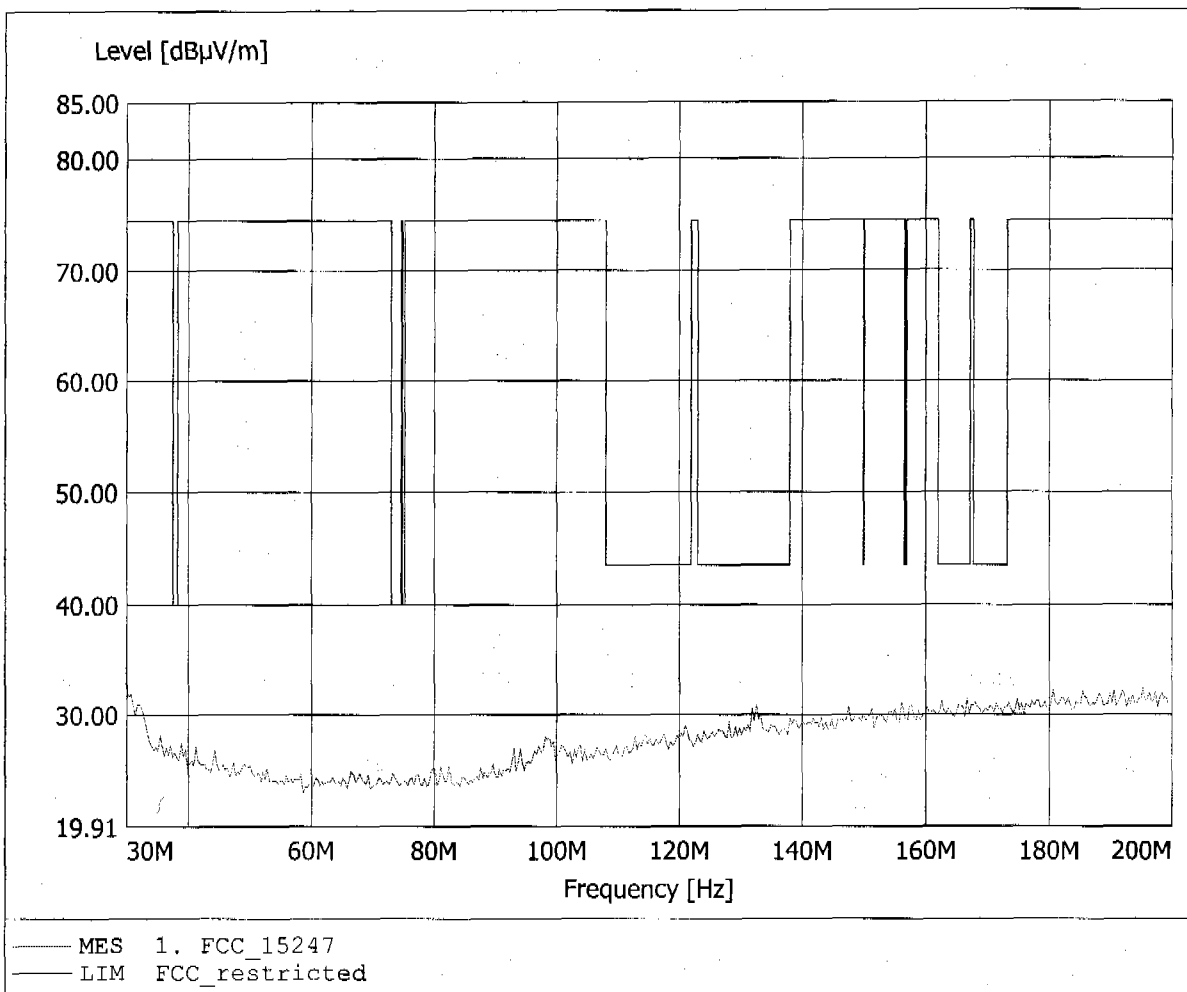


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2402 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 333.066MHz, Emax: 30.79dBµV/m, RBW: 100kHz

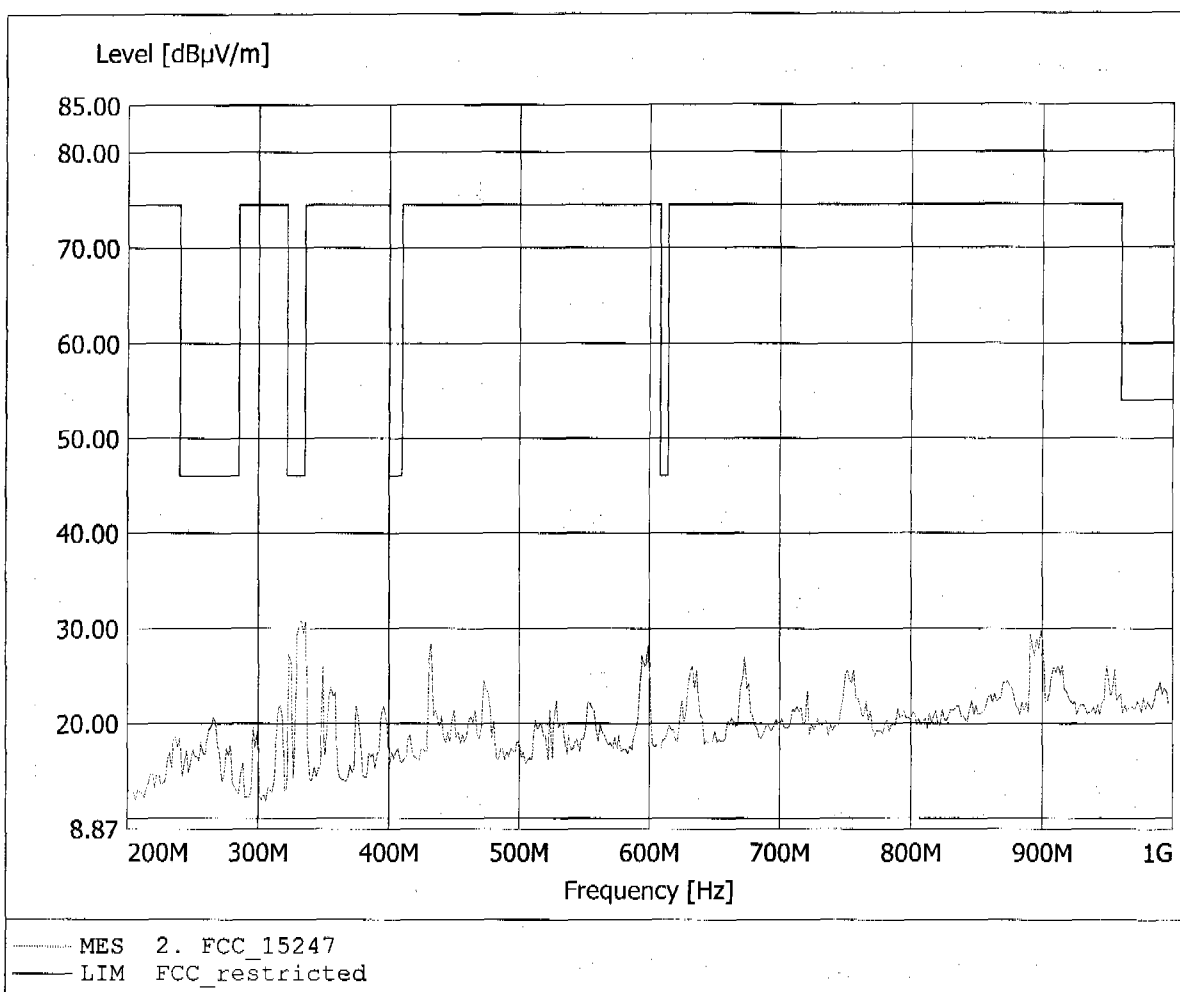


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2402 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Uncom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 432.465MHz, Emax: 34.36dBµV/m, RBW: 100kHz

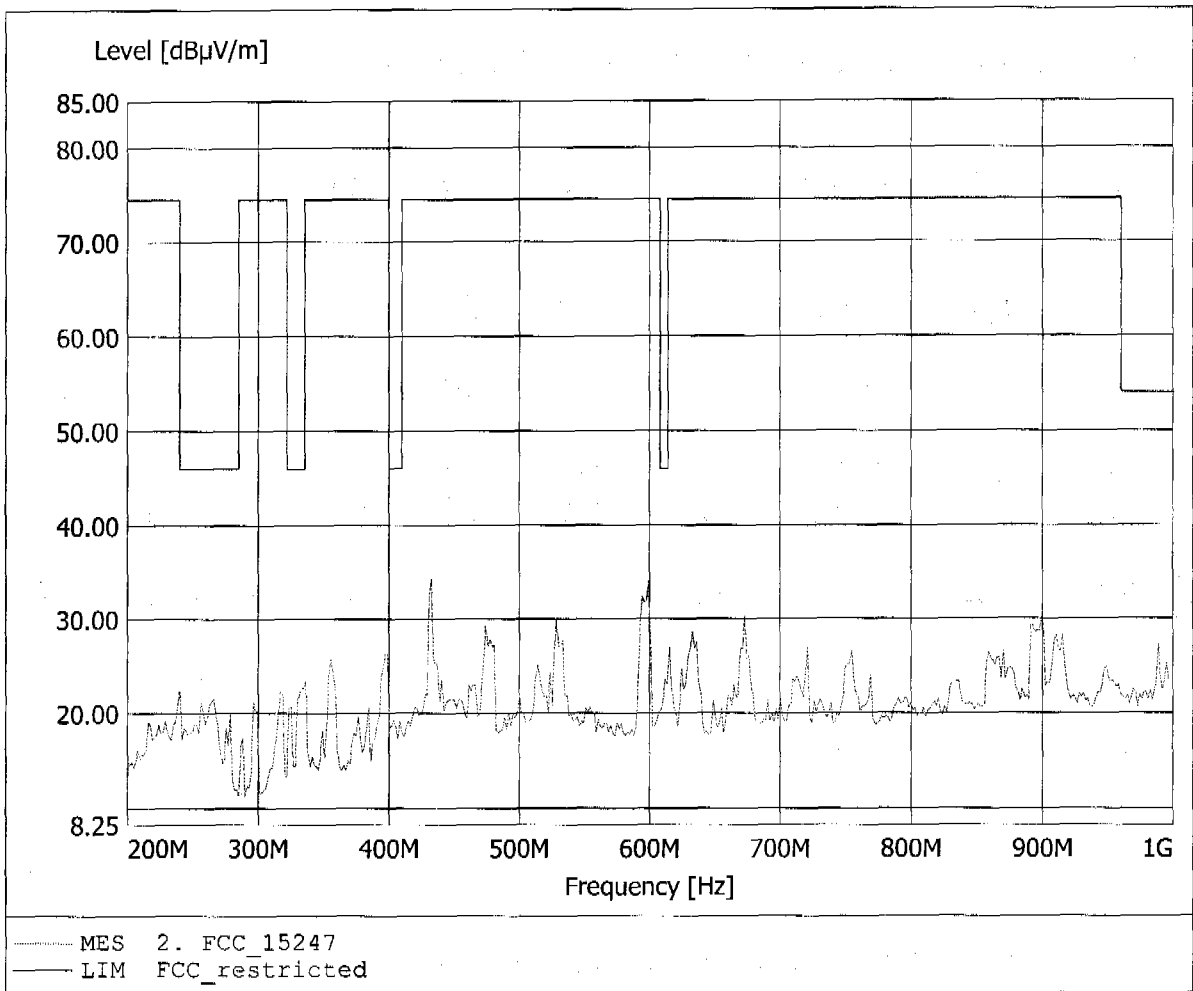


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2402 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 58.55dBµV/m, RBW: 1MHz

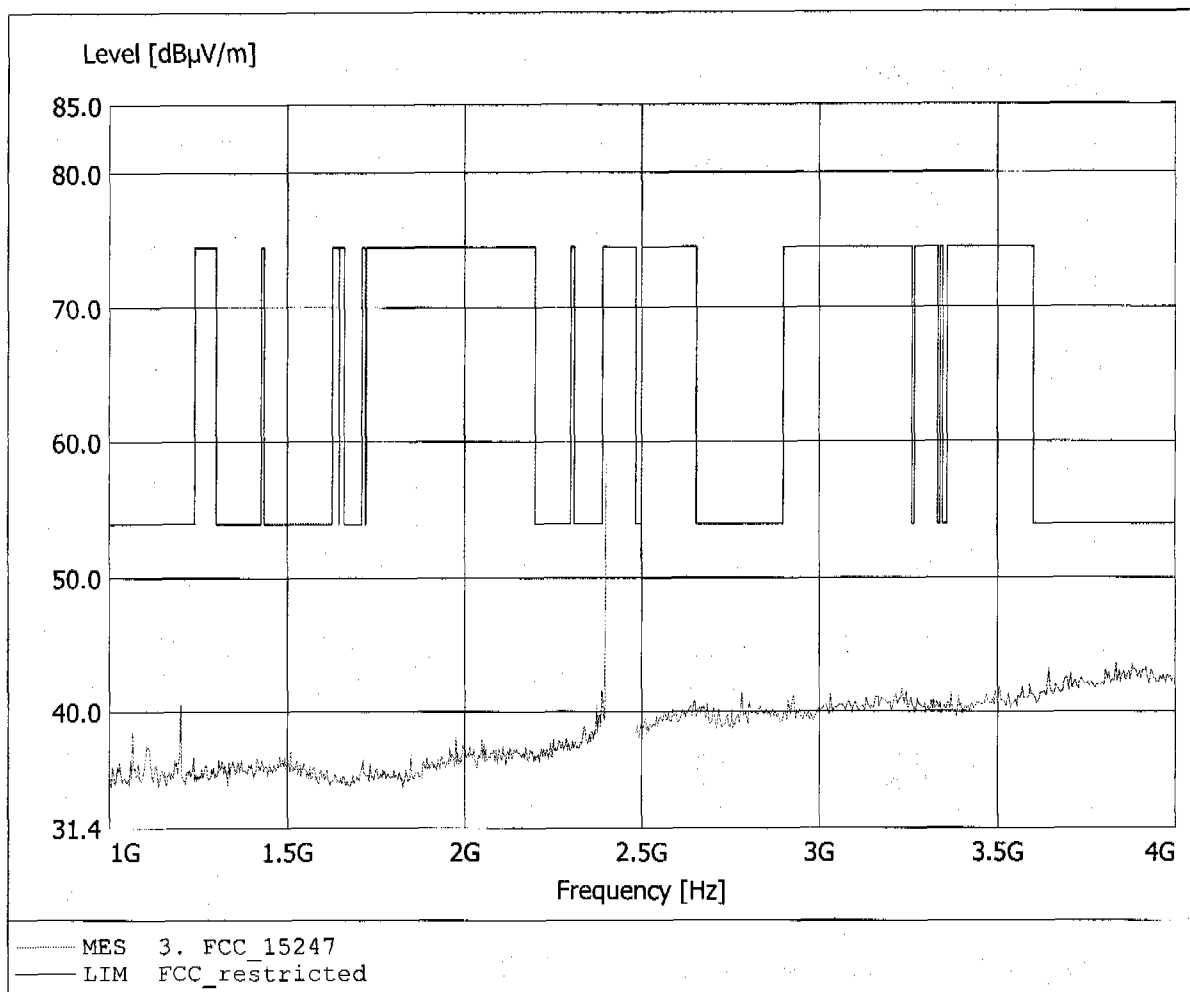


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2402 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 50.77dBµV/m, RBW: 1MHz

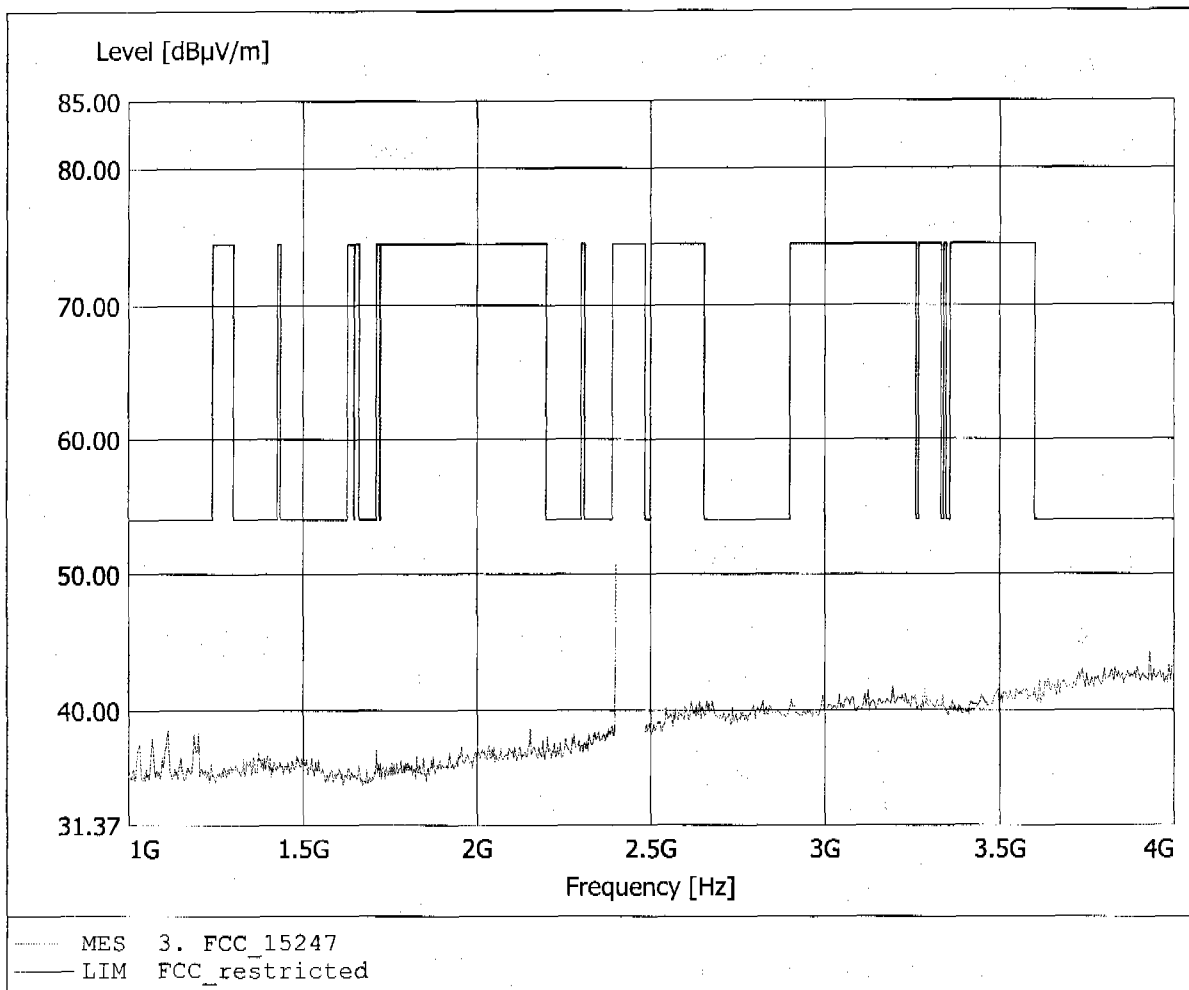


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2402 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 44.11dBµV/m, RBW: 1MHz

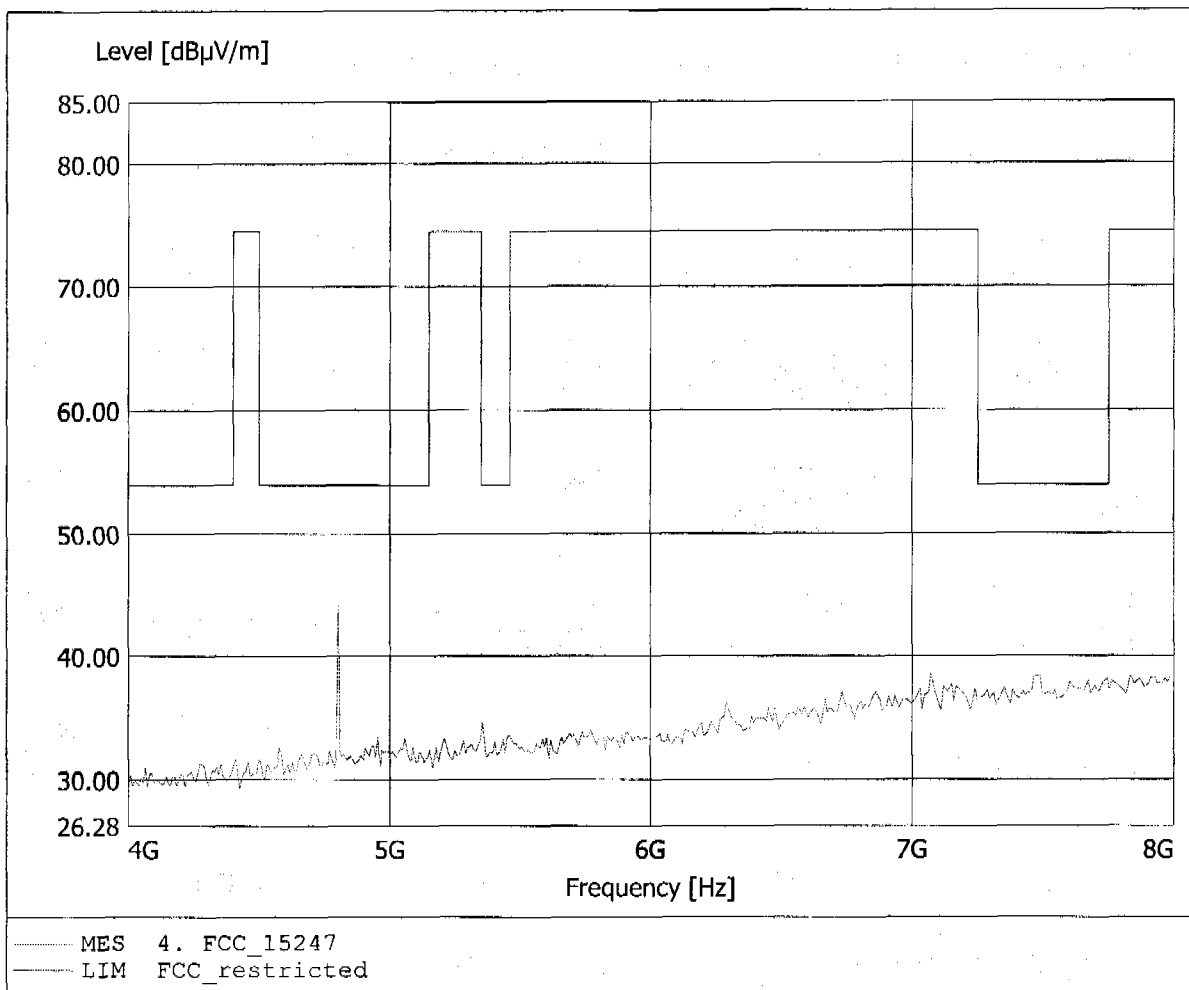


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2402 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 41.15dBµV/m, RBW: 1MHz

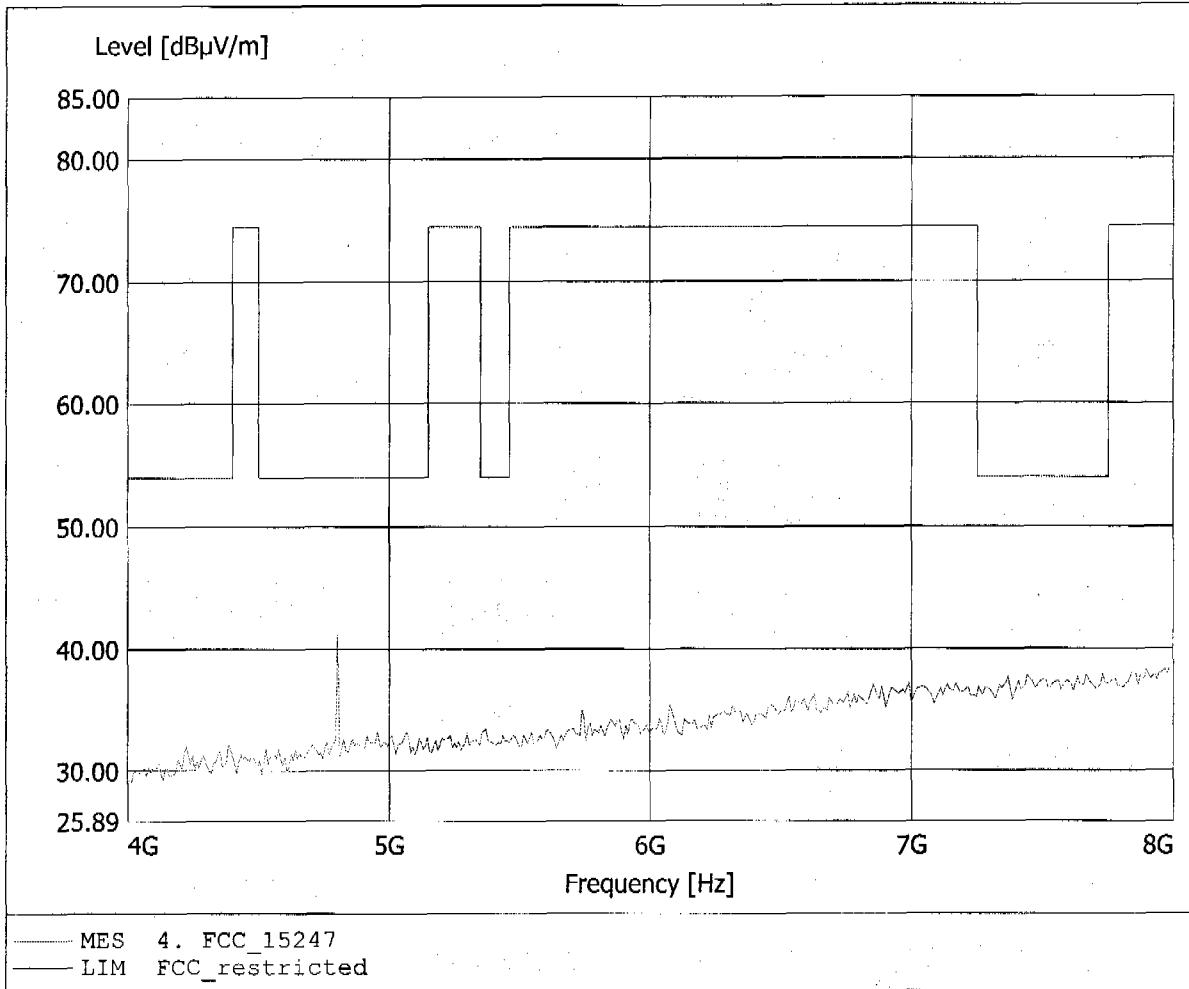


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2402 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.567GHz, Emax: 41.93dBµV/m, RBW: 1MHz

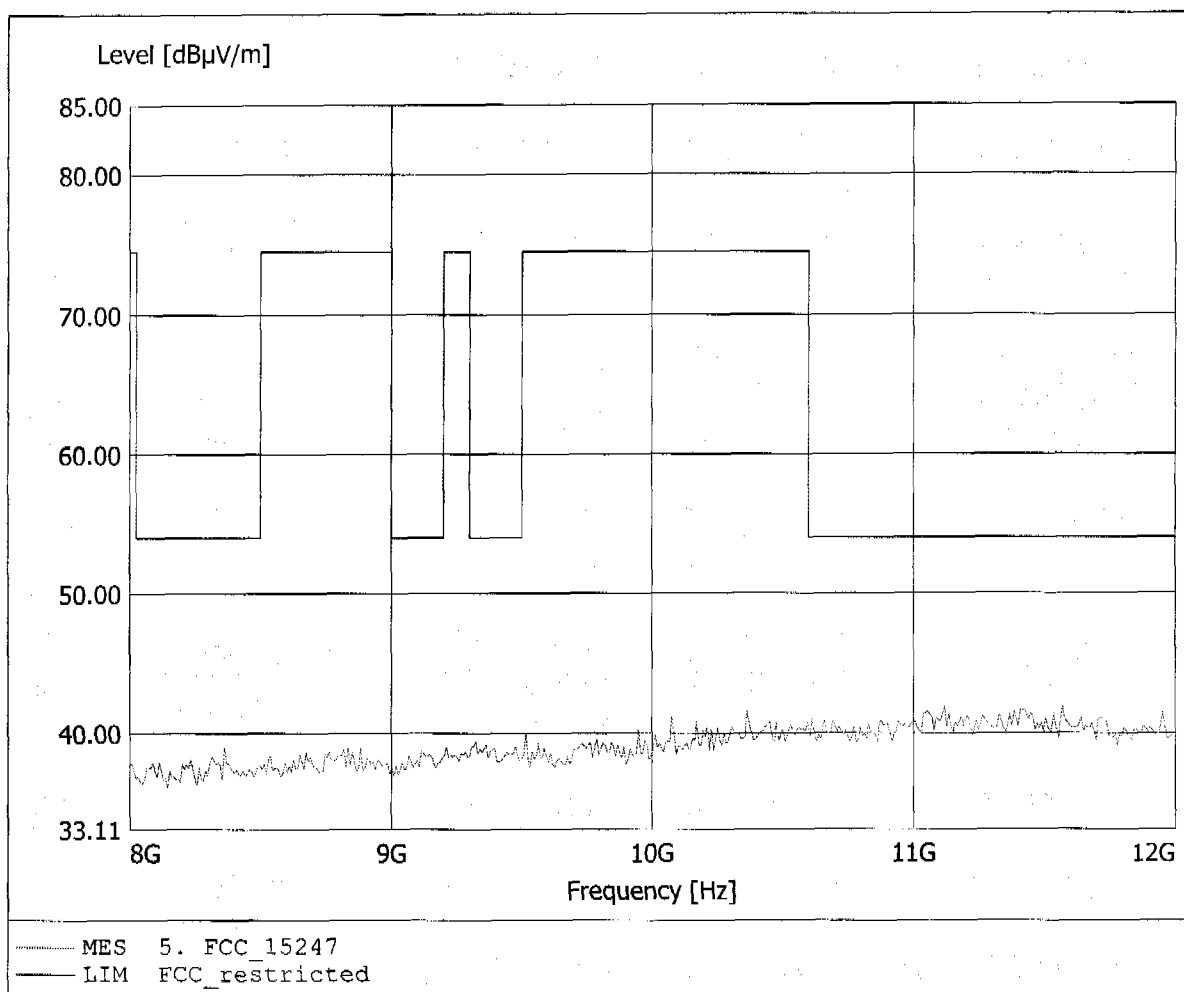


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2402 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.070GHz, Emax: 41.89dBµV/m, RBW: 1MHz

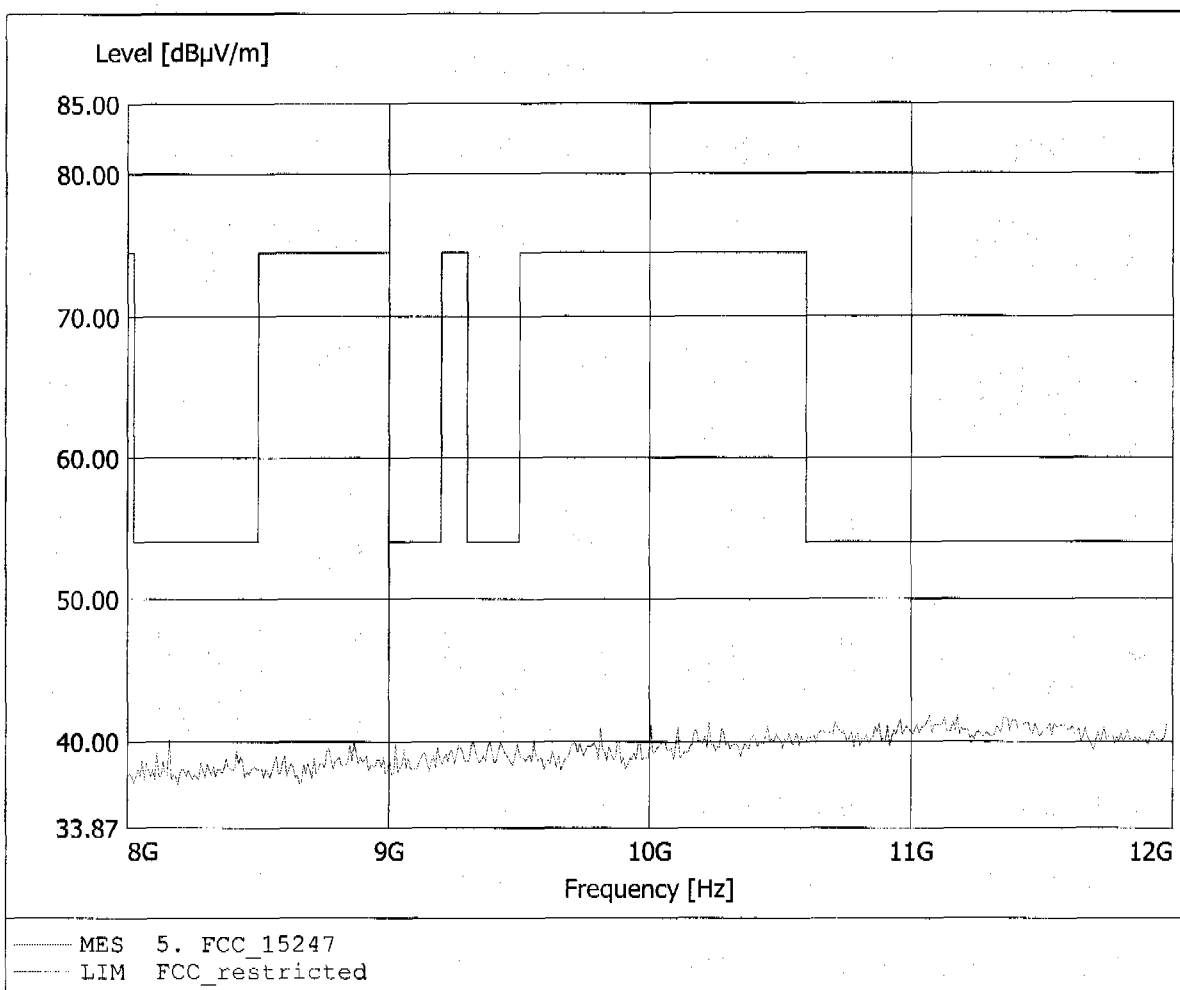


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2402 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.695GHz, Emax: 45.08dBµV/m, RBW: 1MHz

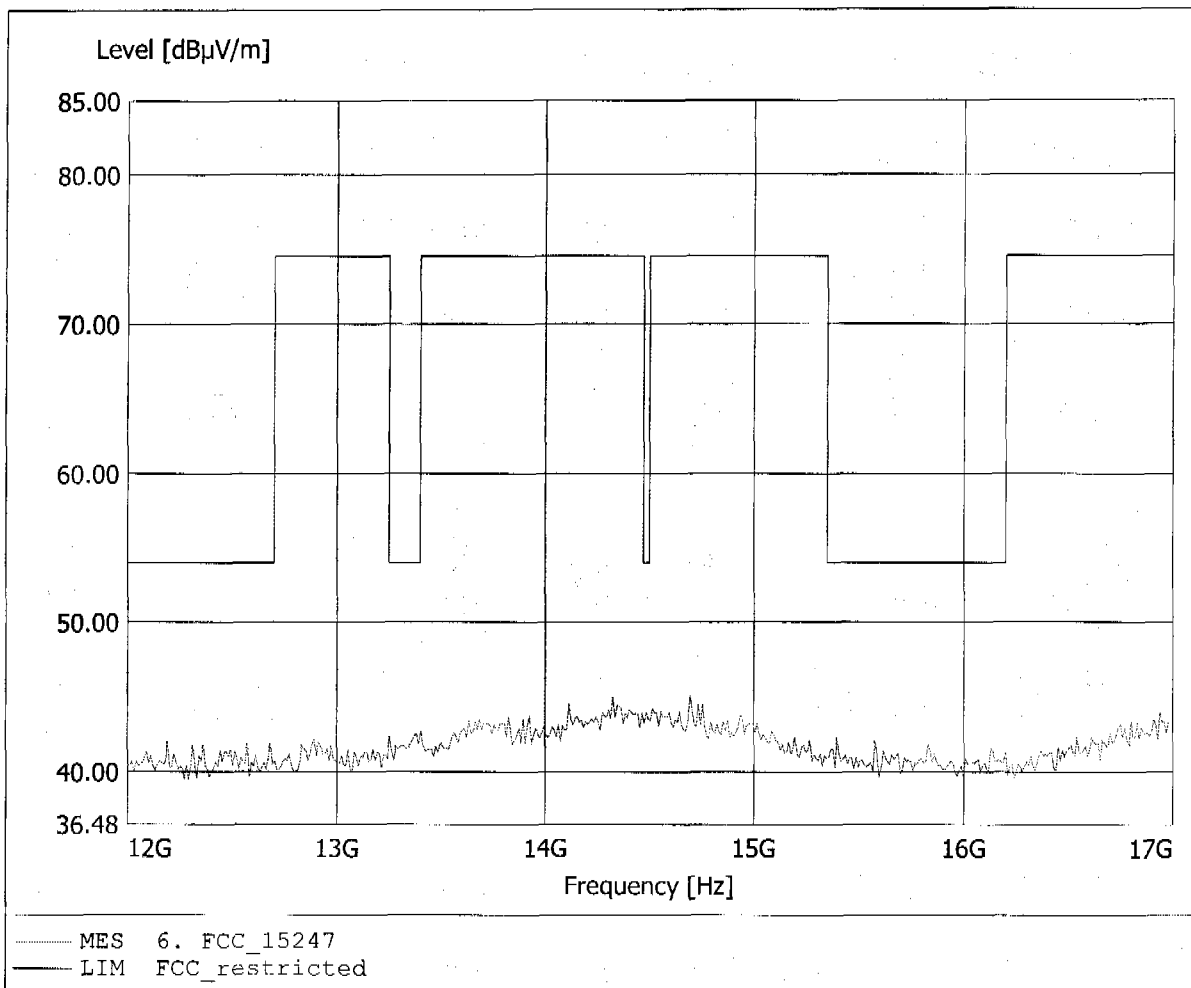


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2402 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.325GHz, Emax: 44.76dBµV/m, RBW: 1MHz

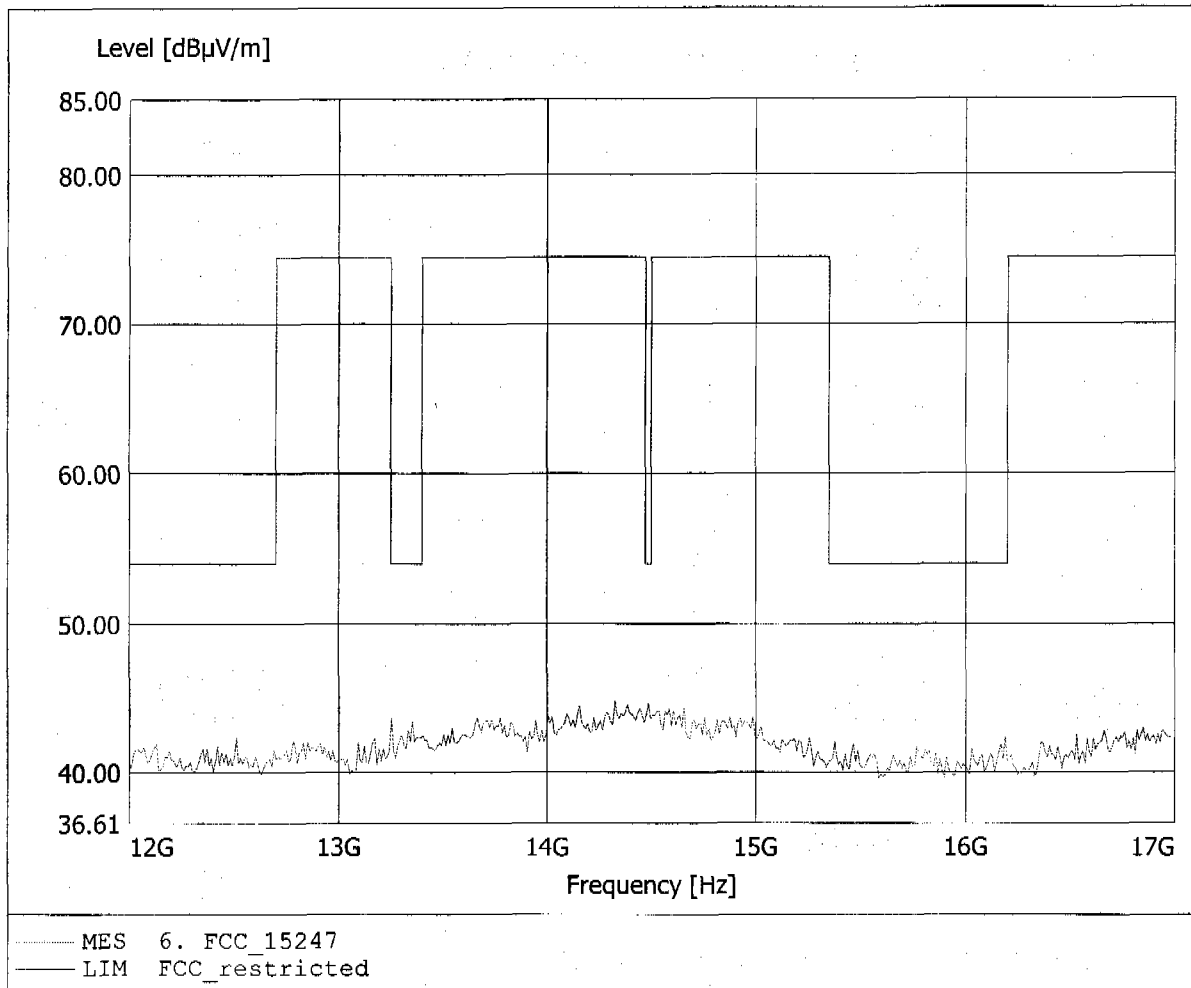


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2402 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.038GHz, Emax: 45.48dBµV/m, RBW: 1MHz

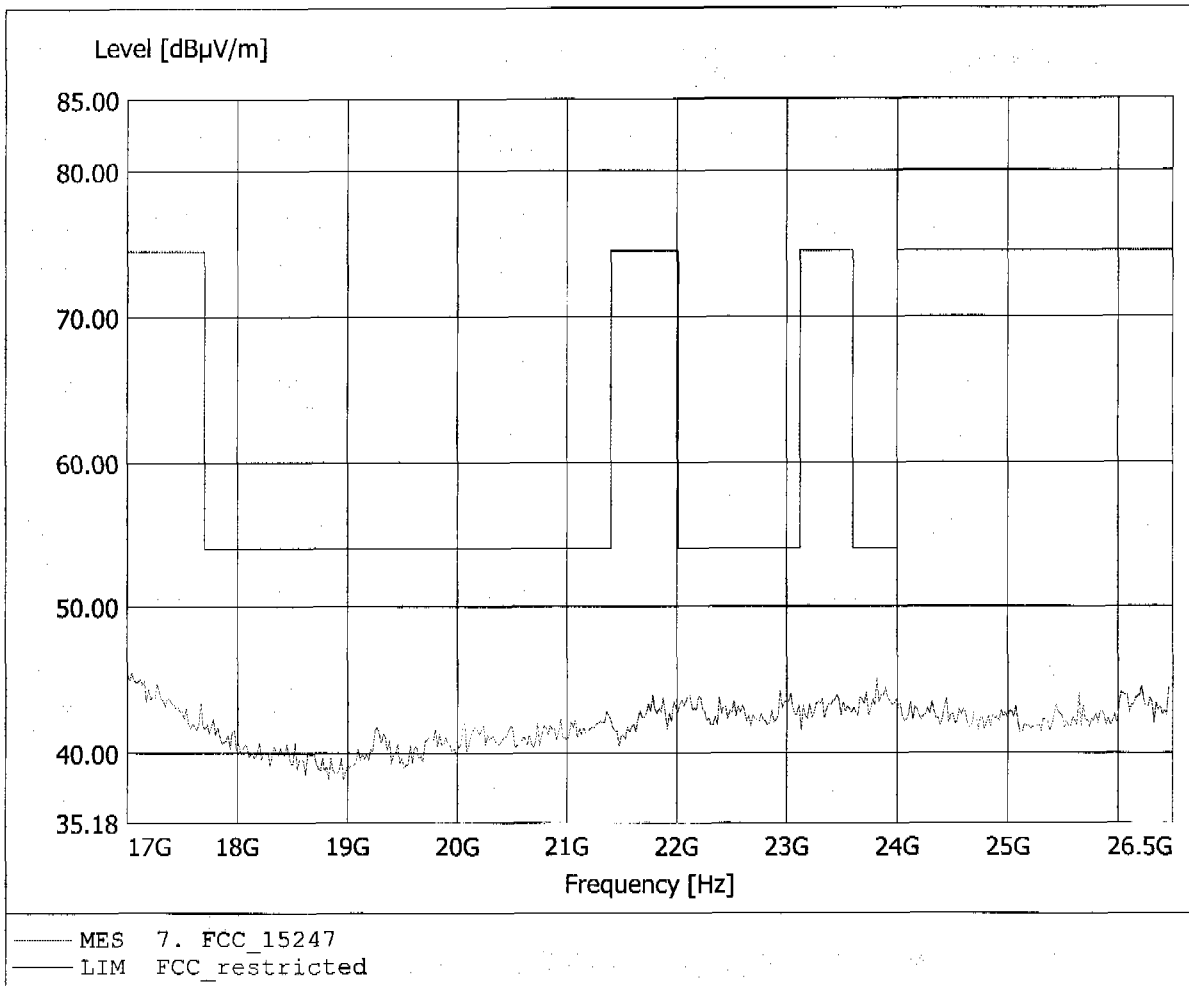


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2402 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.019GHz, Emax: 45.46dBµV/m, RBW: 1MHz

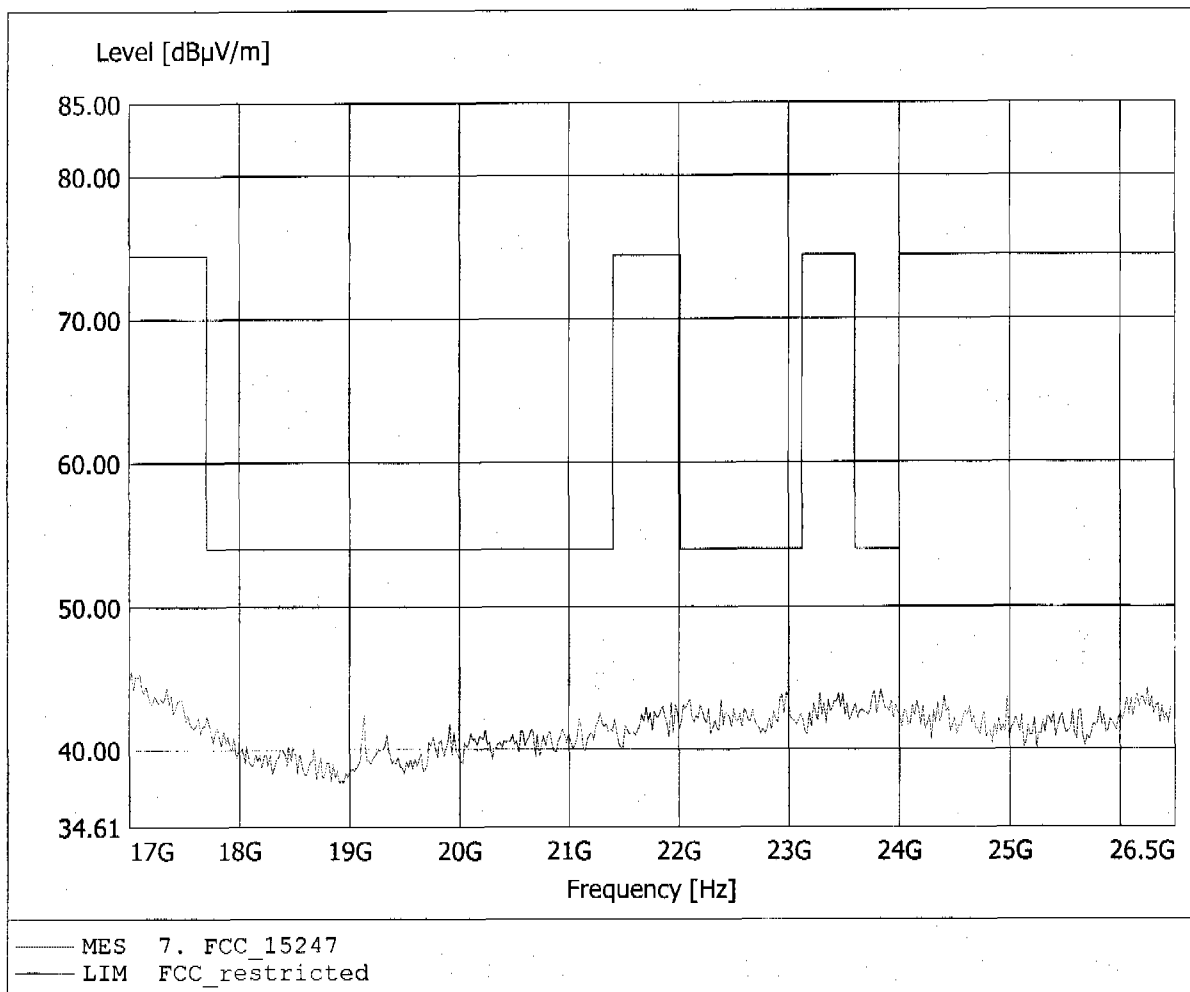


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2441 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 174.790MHz, Emax: 33.29dBµV/m, RBW: 100kHz

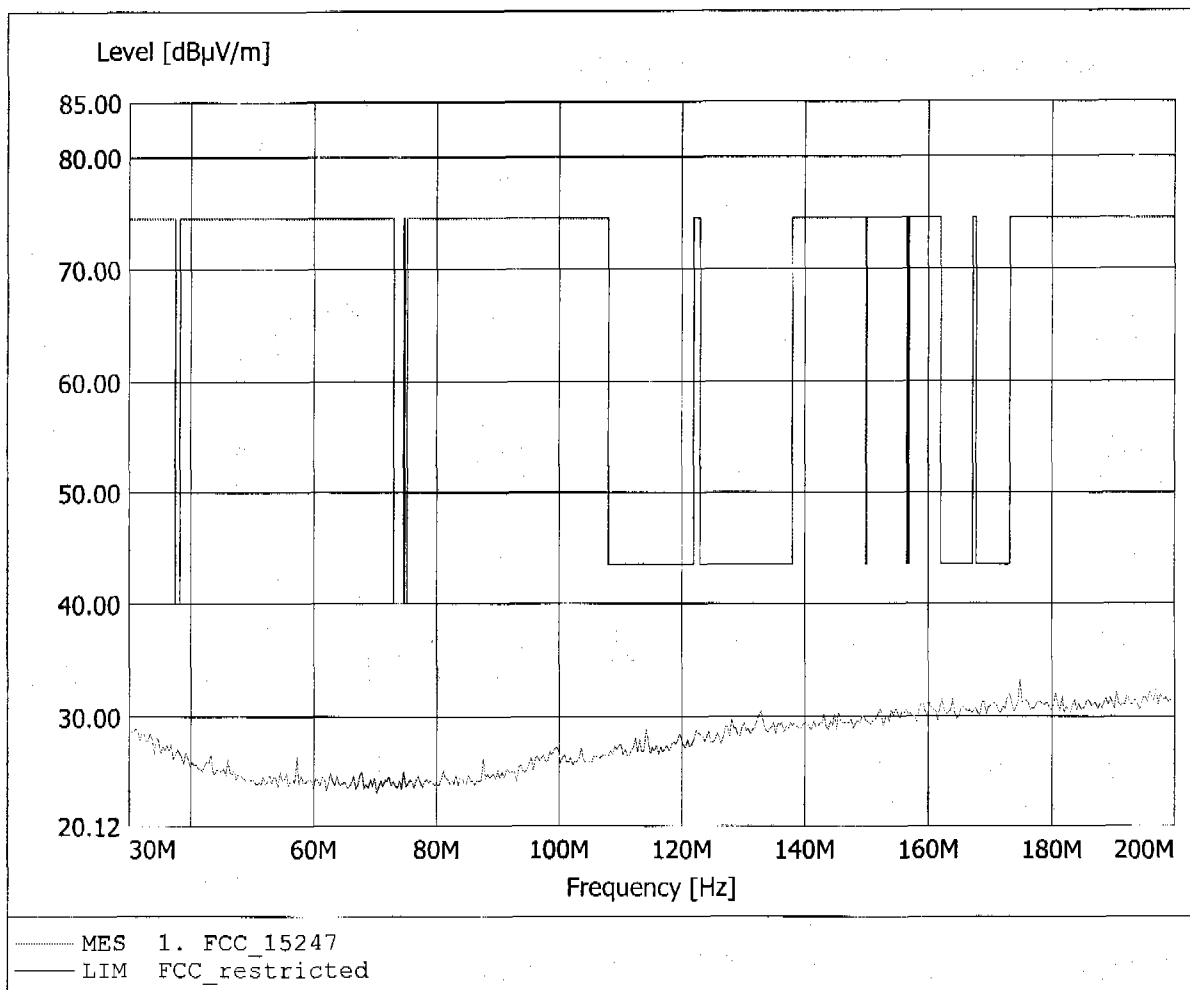


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2441 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 30.681MHz, Emax: 32.93dBµV/m, RBW: 100kHz

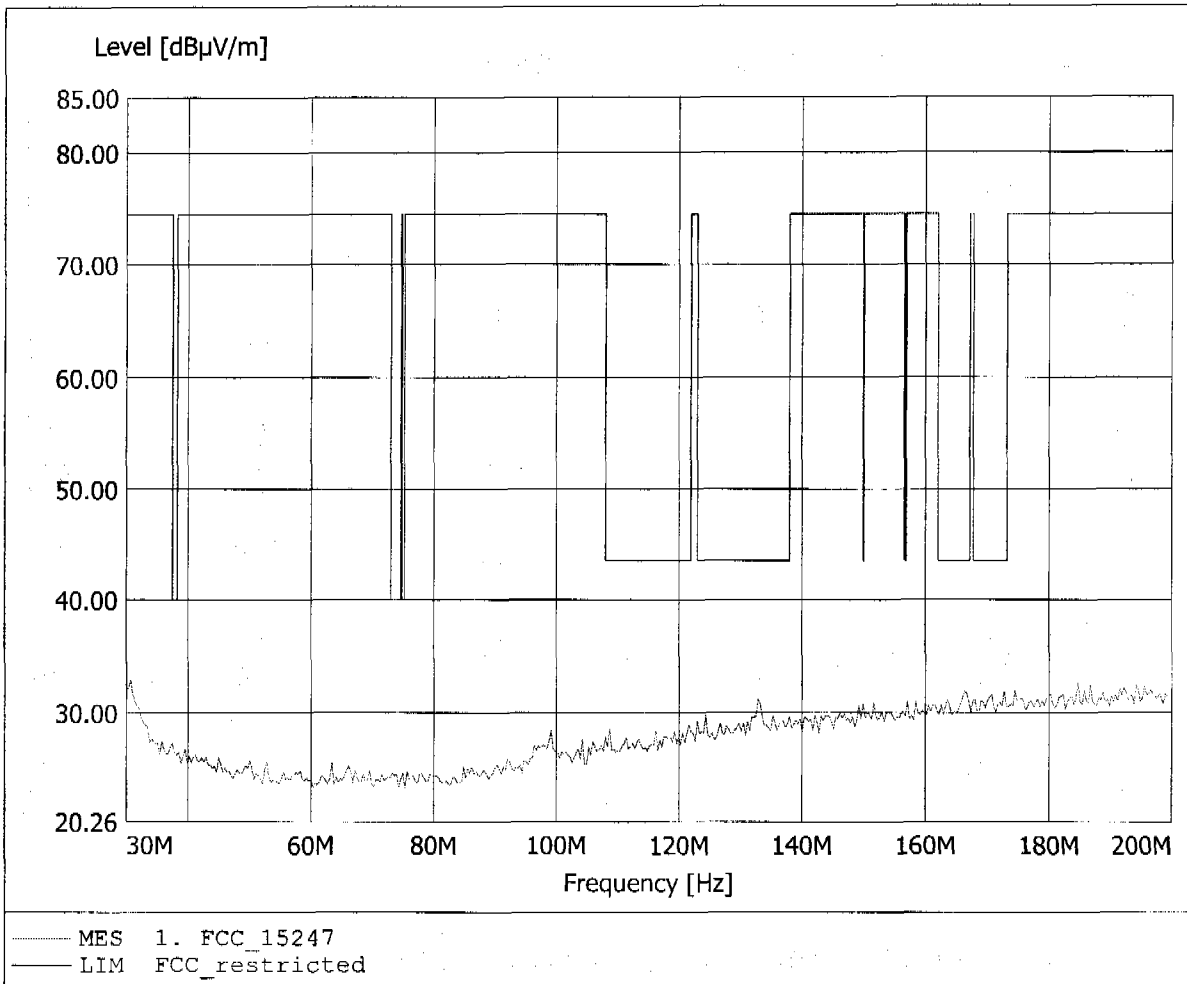


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2441 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 336.273MHz, Emax: 31.35dBµV/m, RBW: 100kHz

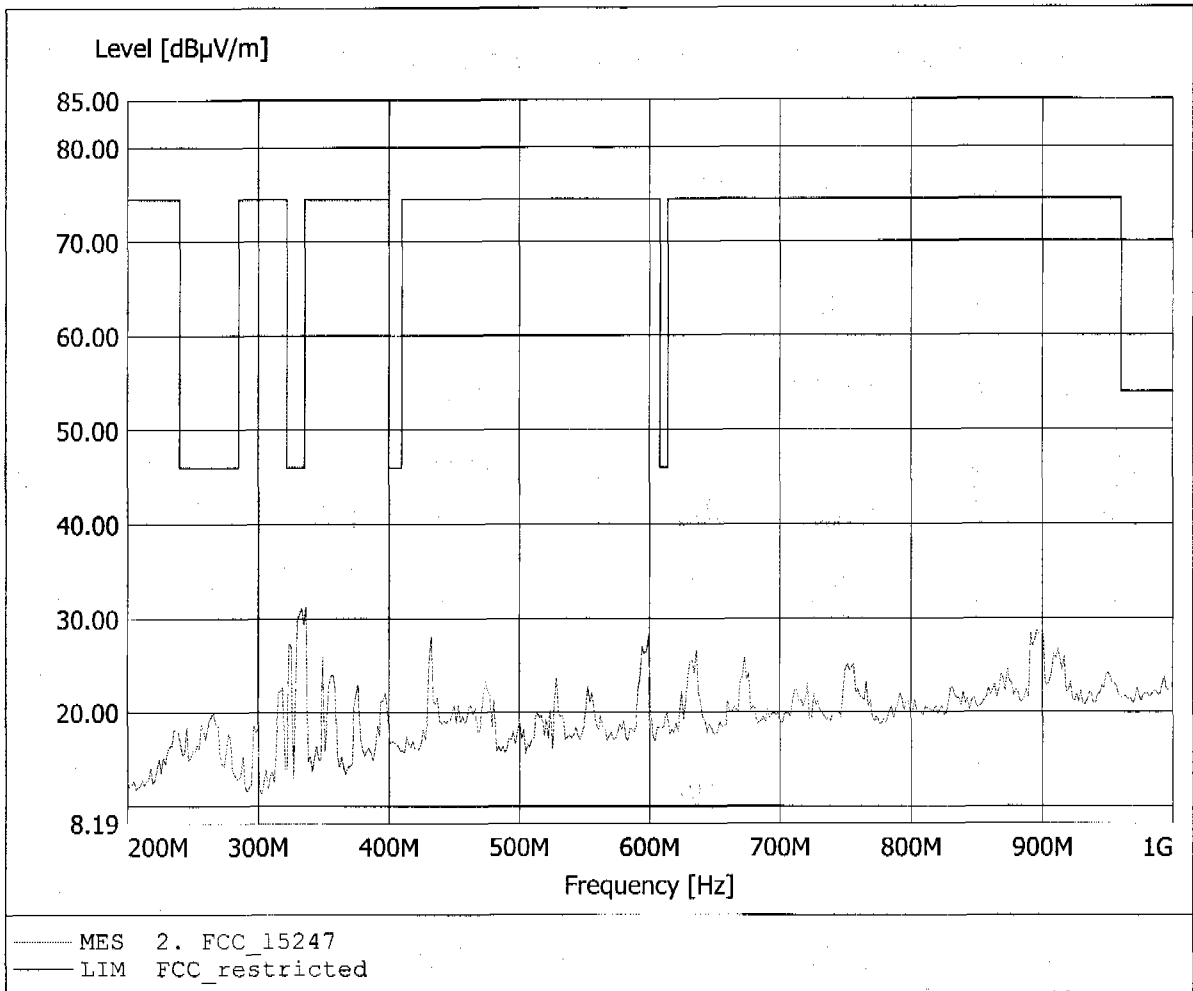


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2441 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 432.465MHz, Emax: 34.42dBµV/m, RBW: 100kHz

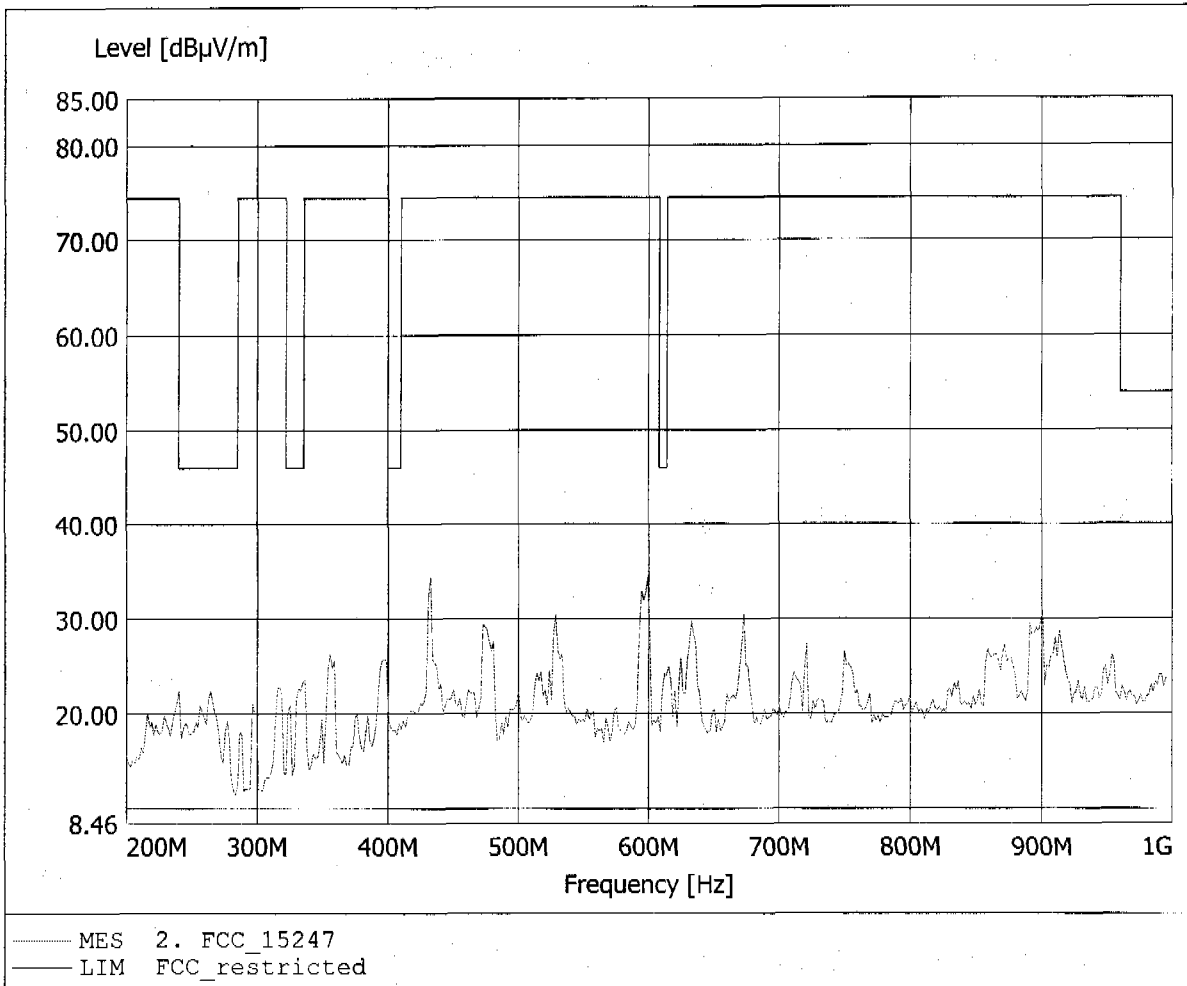


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2441 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.897GHz, Emax: 43.40dBµV/m, RBW: 1MHz

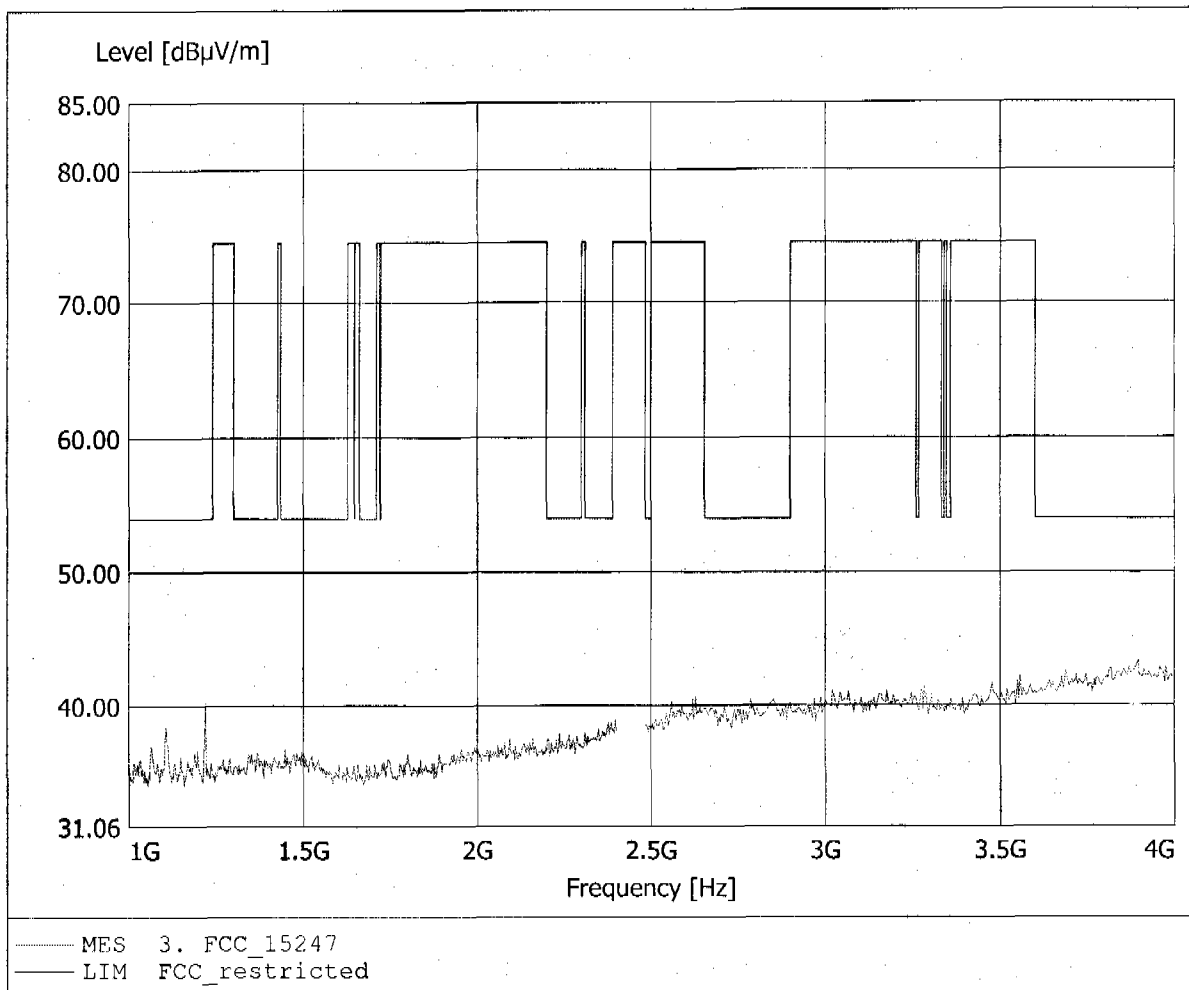


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2441 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.860GHz, Emax: 43.99dBµV/m, RBW: 1MHz

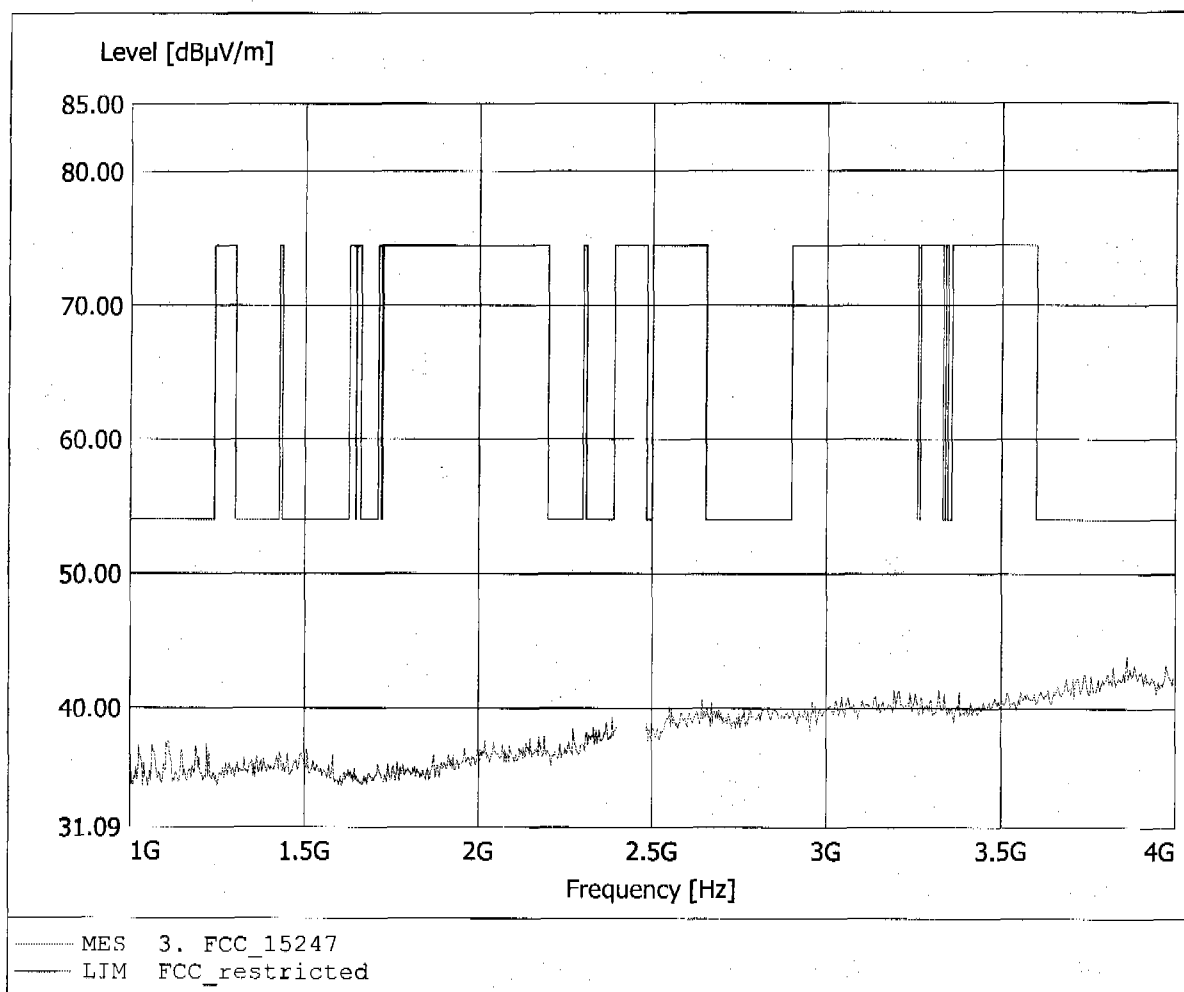


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2441 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 45.30dBµV/m, RBW: 1MHz

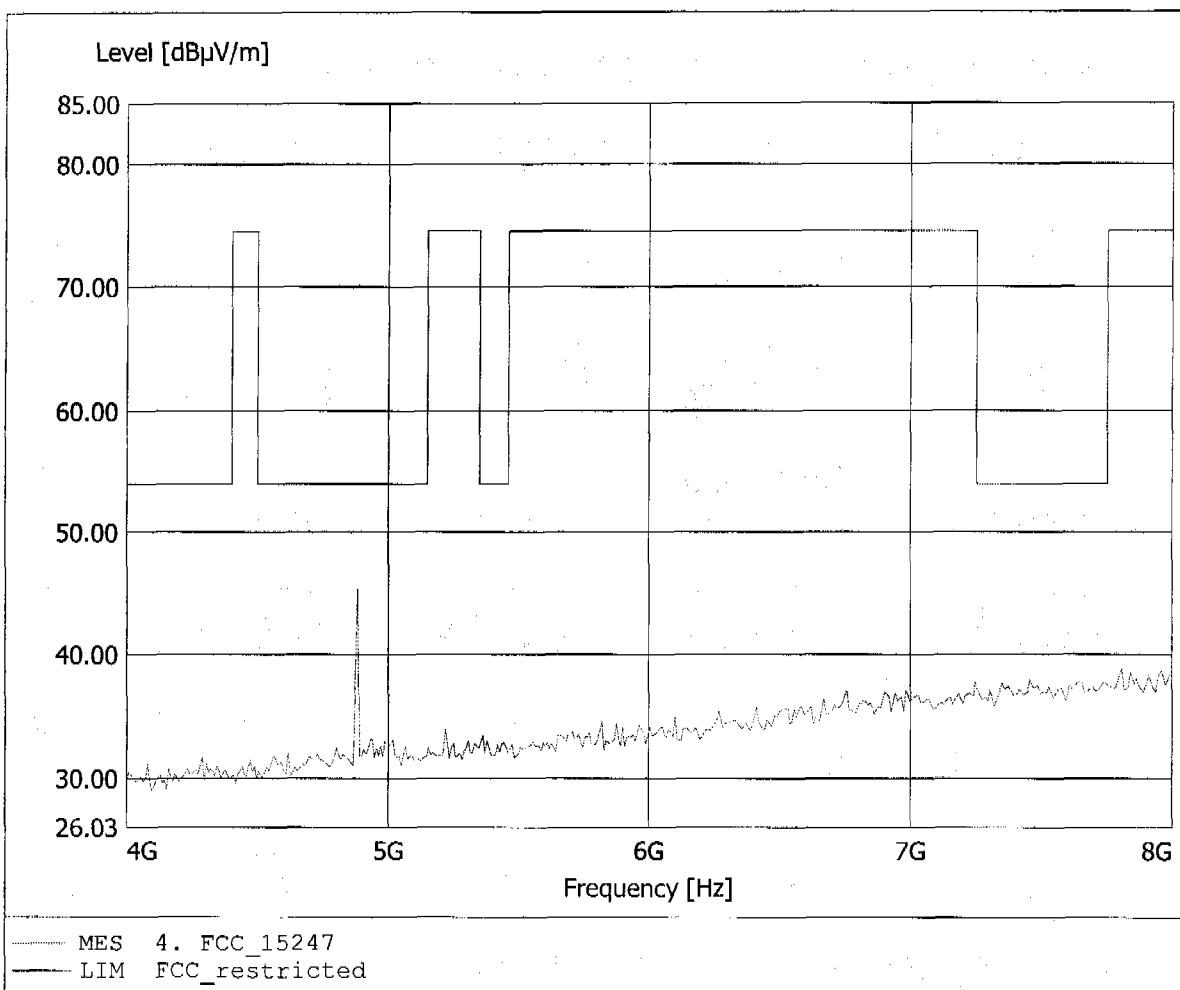


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2441 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.727GHz, Emax: 38.26dBµV/m, RBW: 1MHz

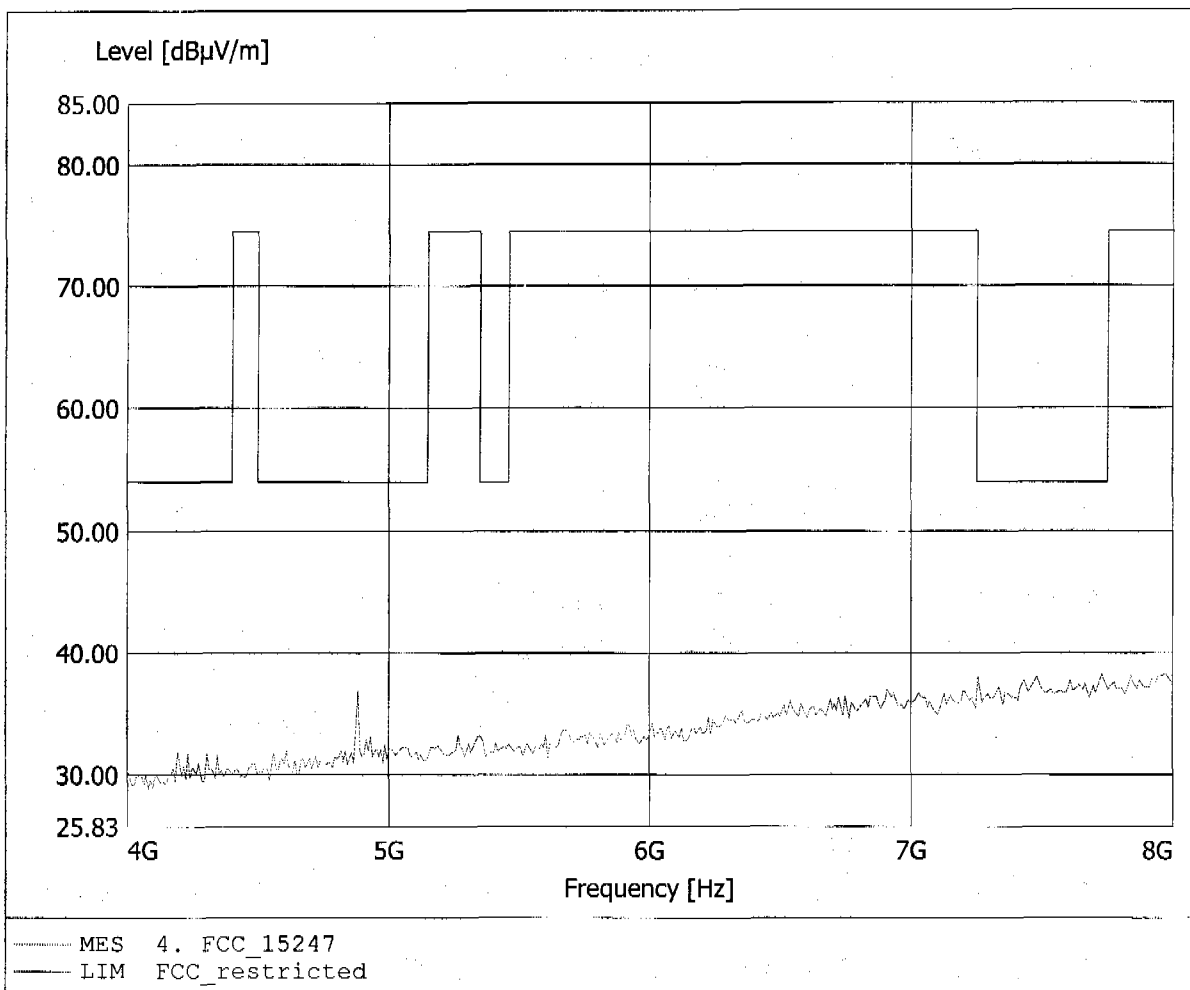


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2441 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.078GHz, Emax: 41.81dBµV/m, RBW: 1MHz

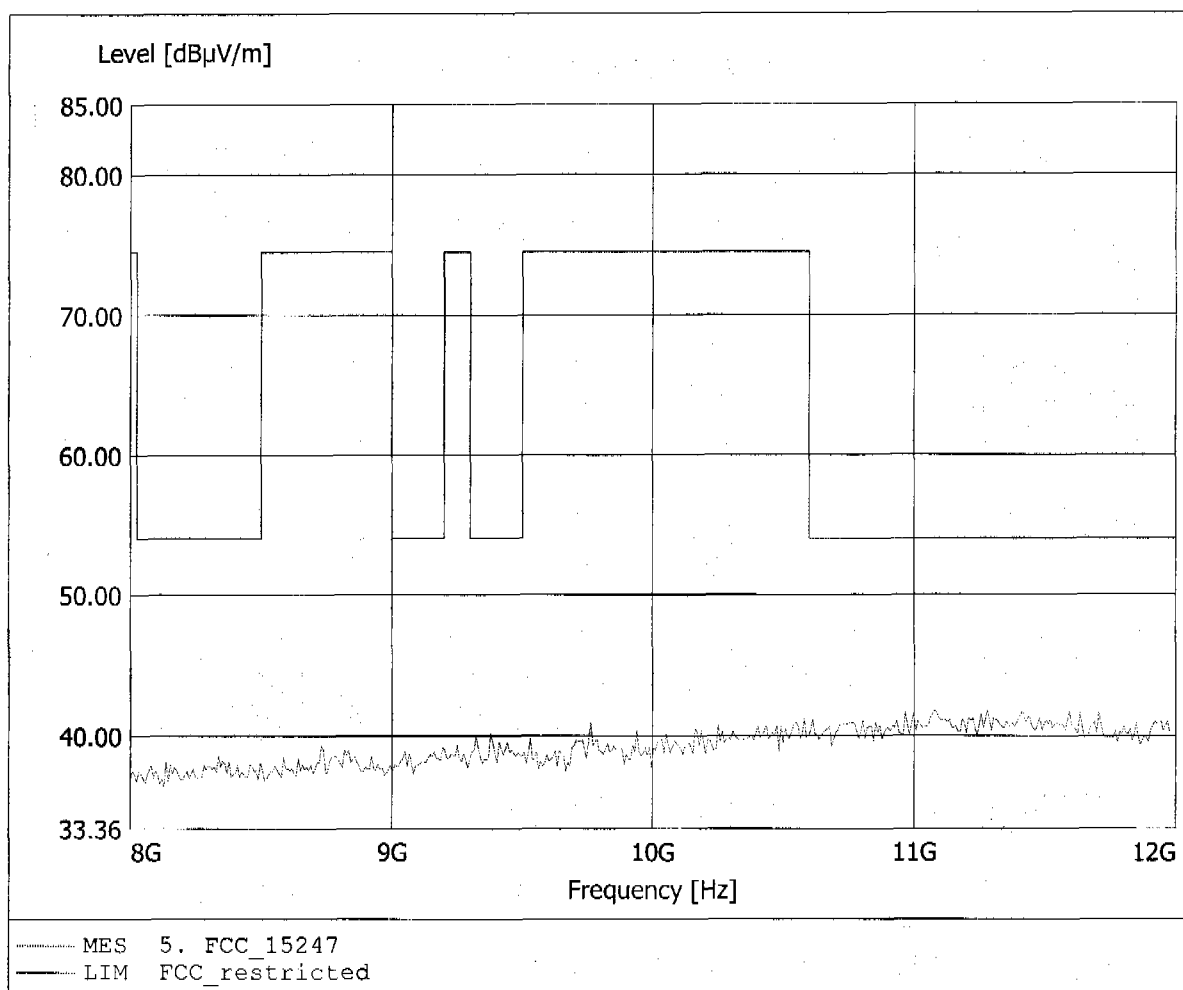


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2441 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.764GHz, Emax: 44.82dBµV/m, RBW: 1MHz

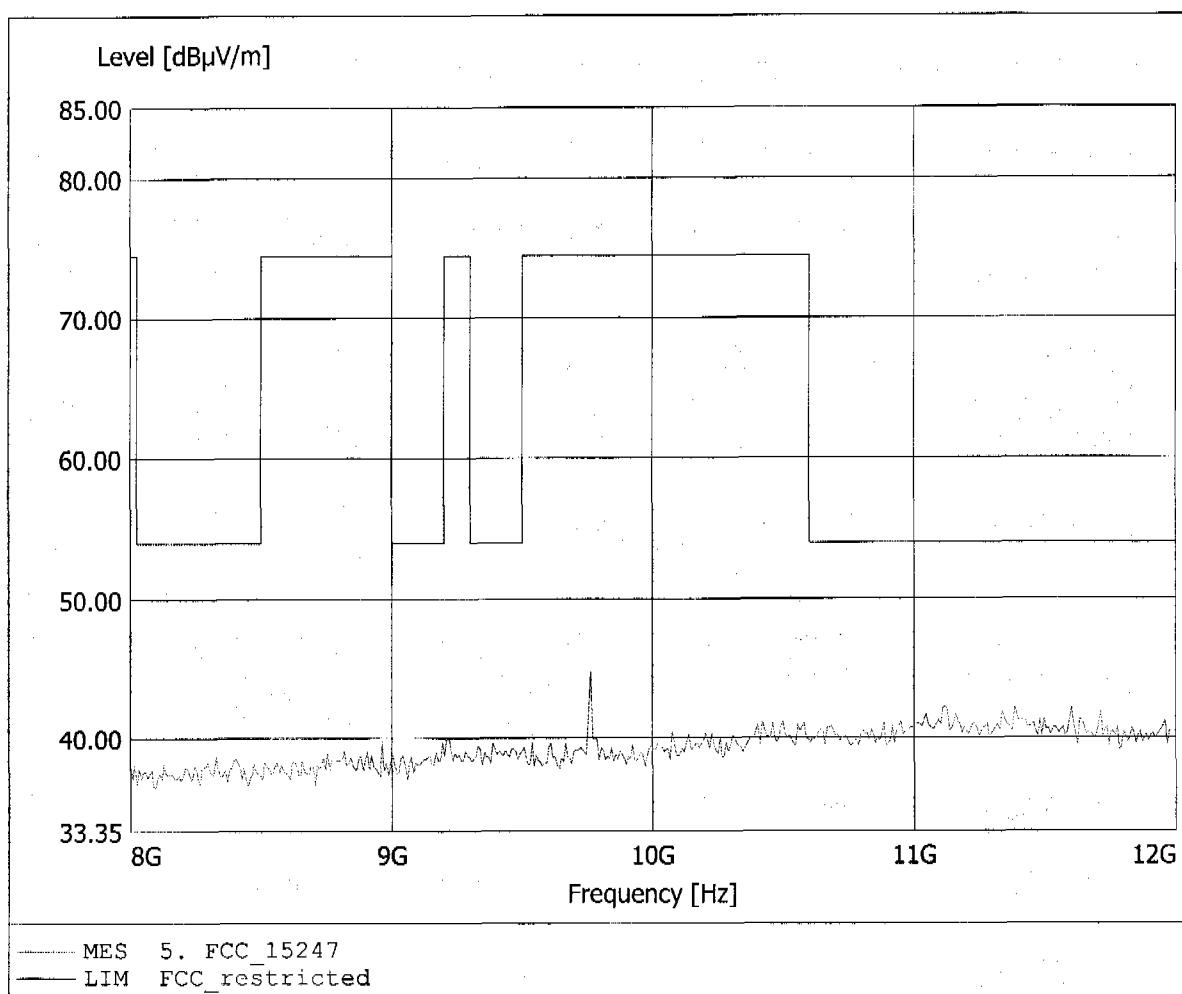


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2441 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.285GHz, Emax: 44.86dBµV/m, RBW: 1MHz

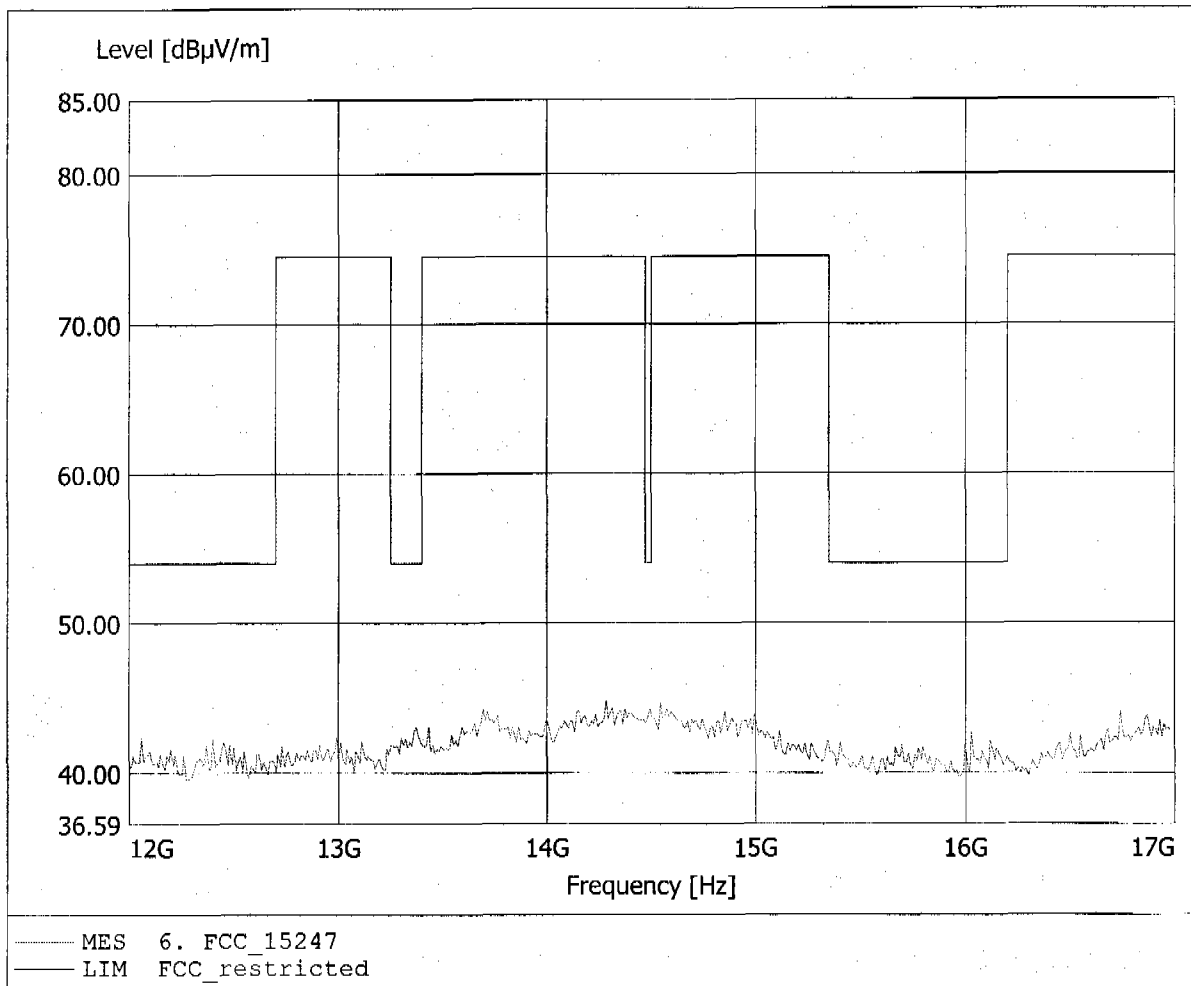


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2441 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.385GHz, Emax: 44.82dBuV/m, RBW: 1MHz

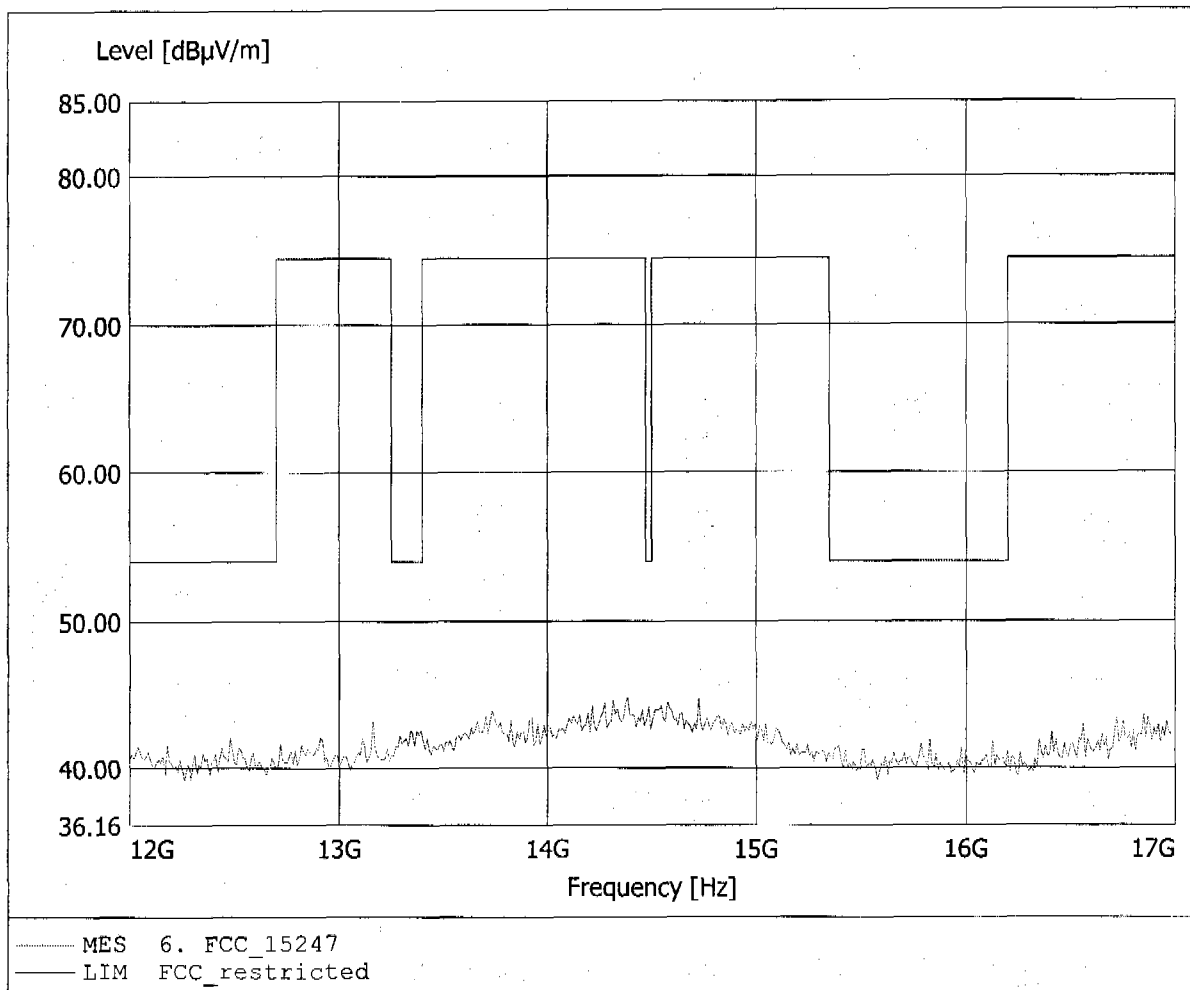


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2441 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.209GHz, Emax: 45.12dBpV/m, RBW: 1MHz

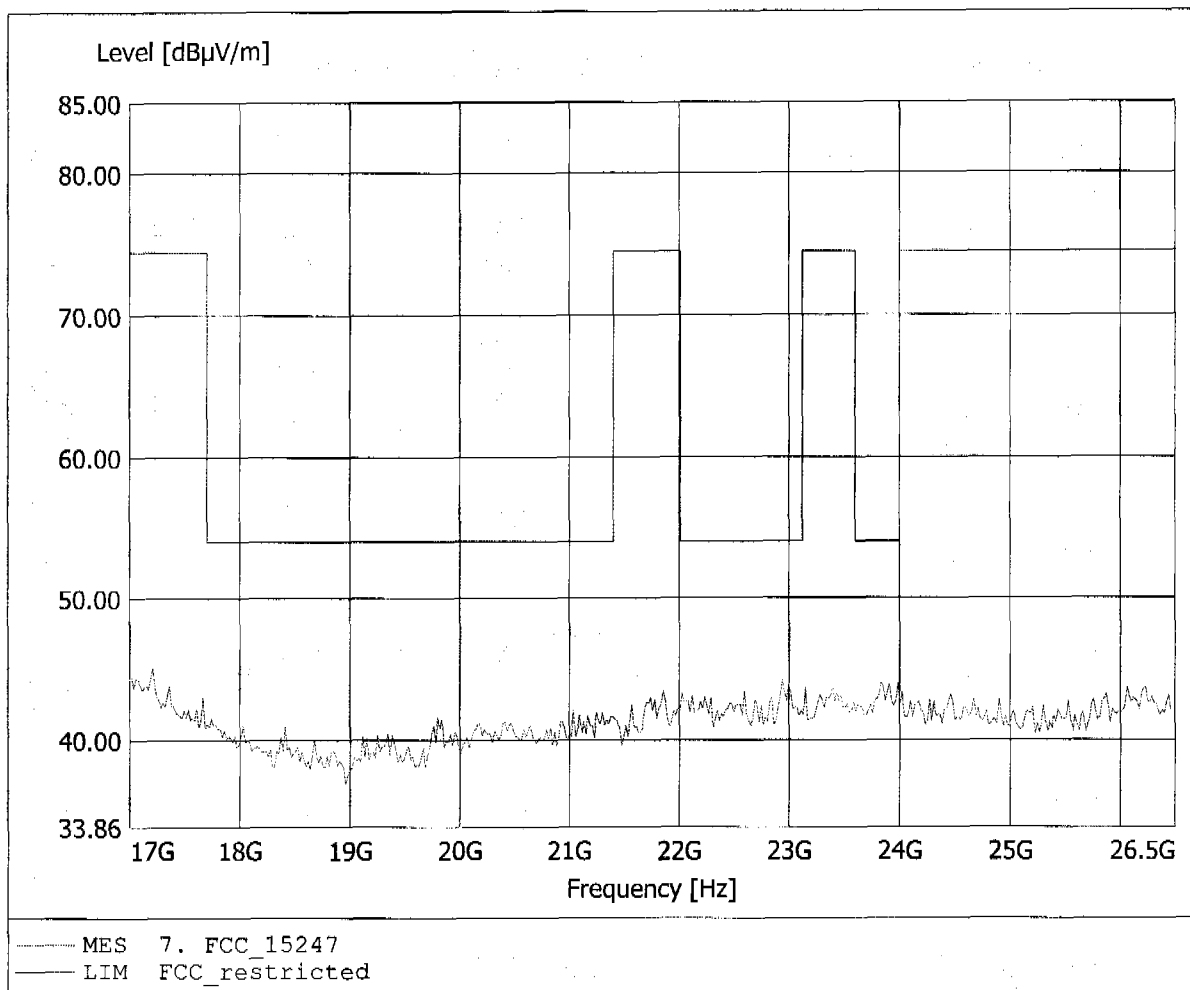


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2441 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.076GHz, Emax: 46.12dBuV/m, RBW: 1MHz

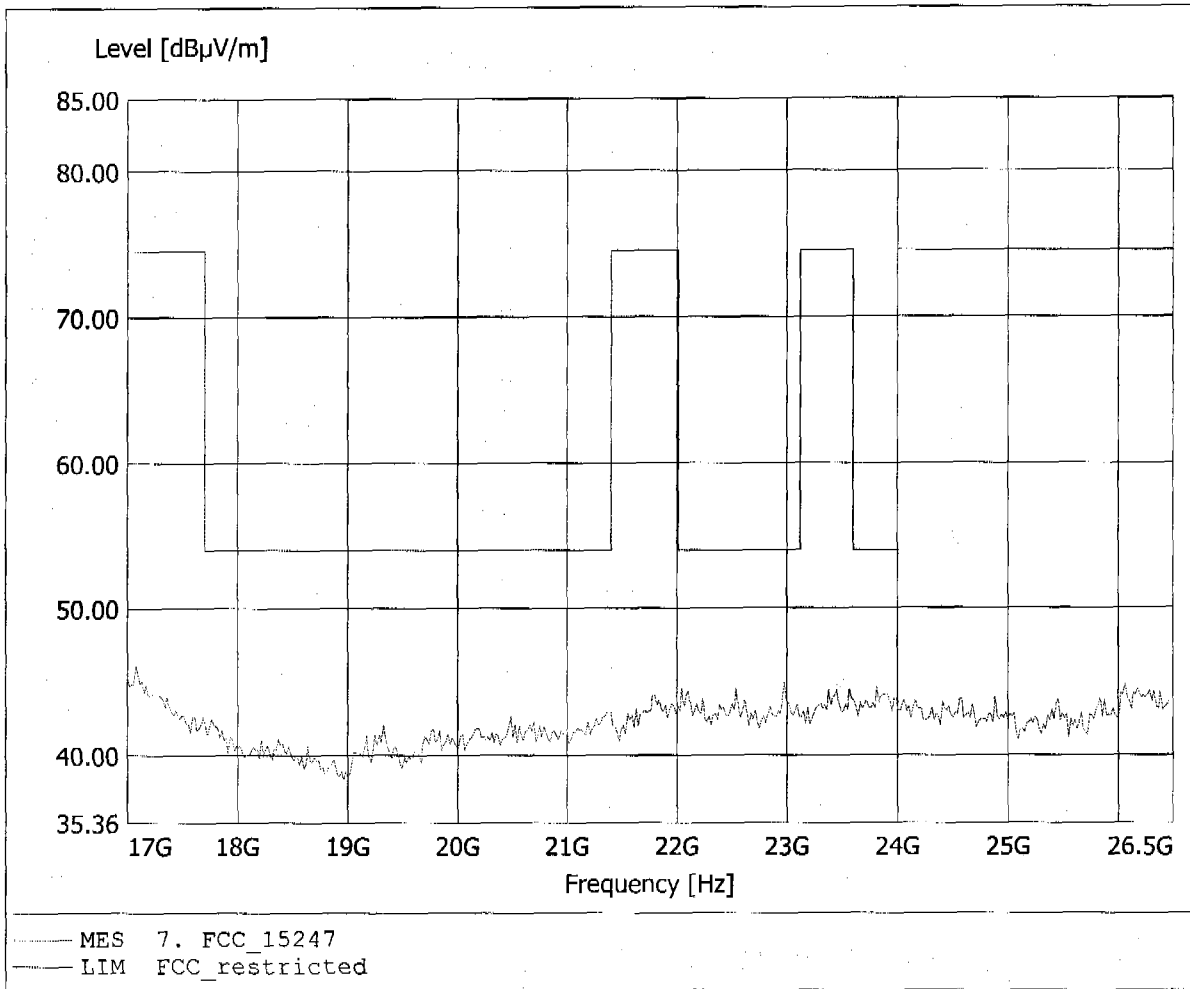


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2480 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 186.713MHz, Emax: 32.55dBµV/m, RBW: 100kHz

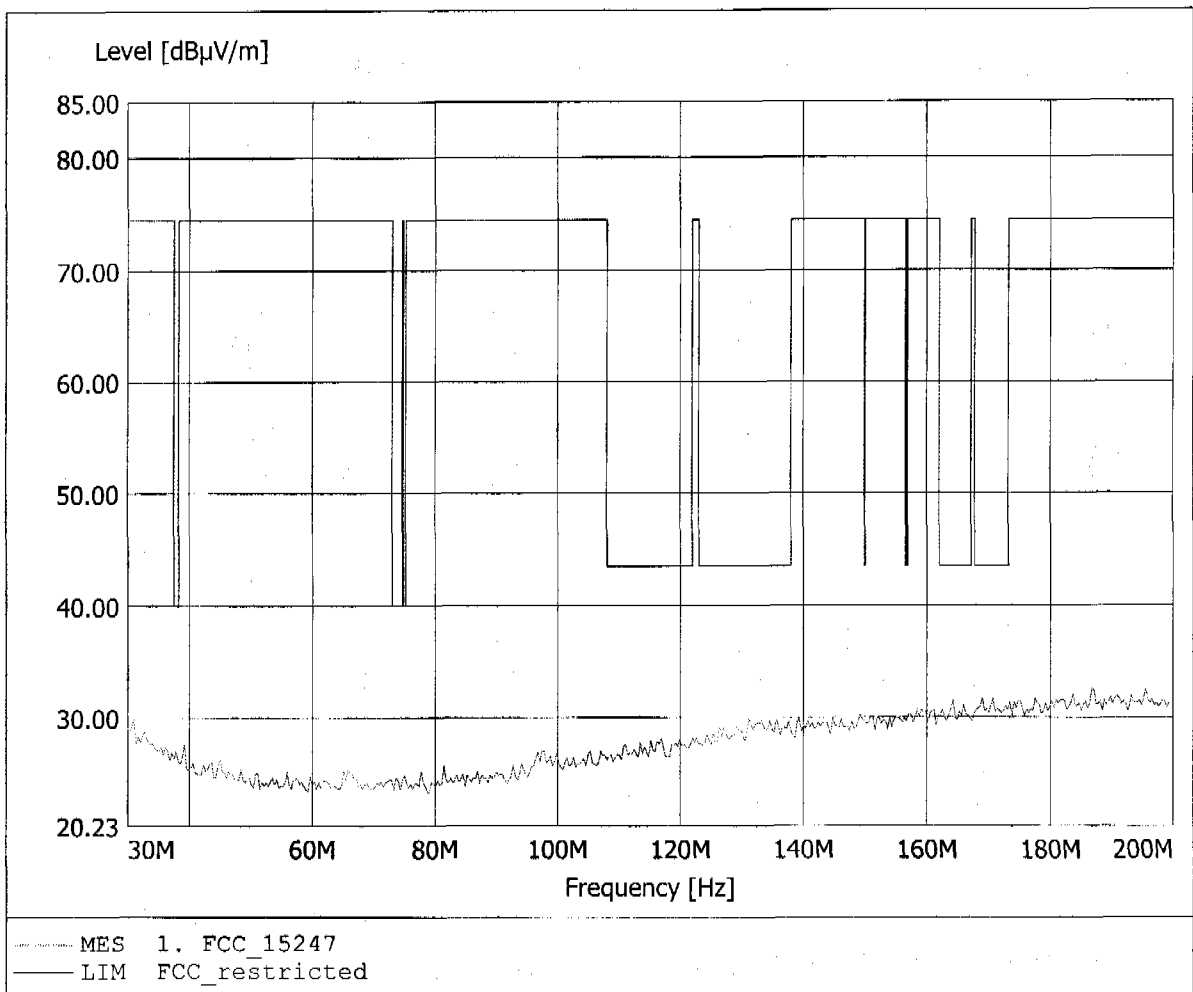


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2480 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 187.395MHz, Emax: 32.32dBµV/m, RBW: 100kHz

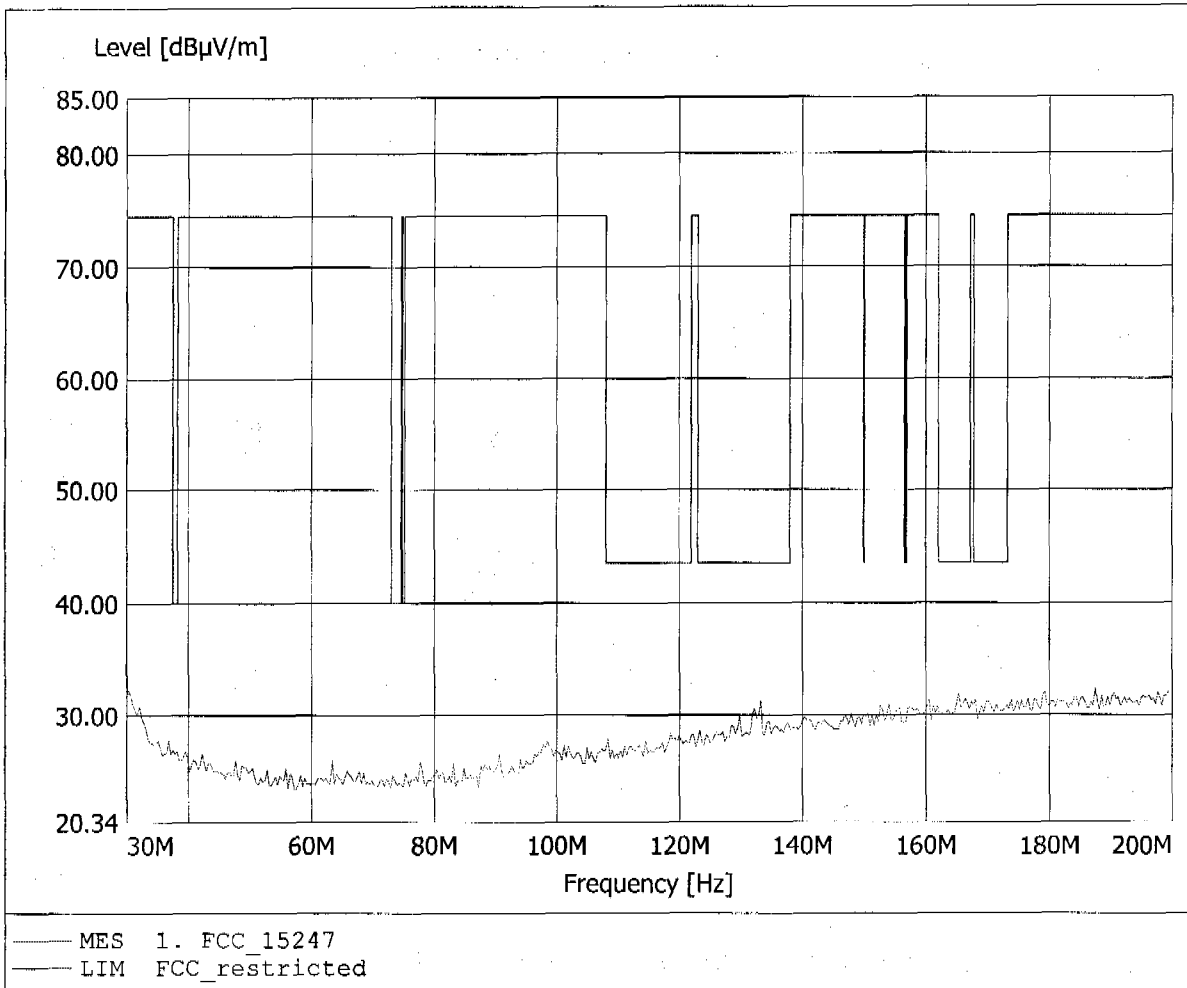


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2480 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 336.273MHz, Emax: 30.02dBµV/m, RBW: 100kHz

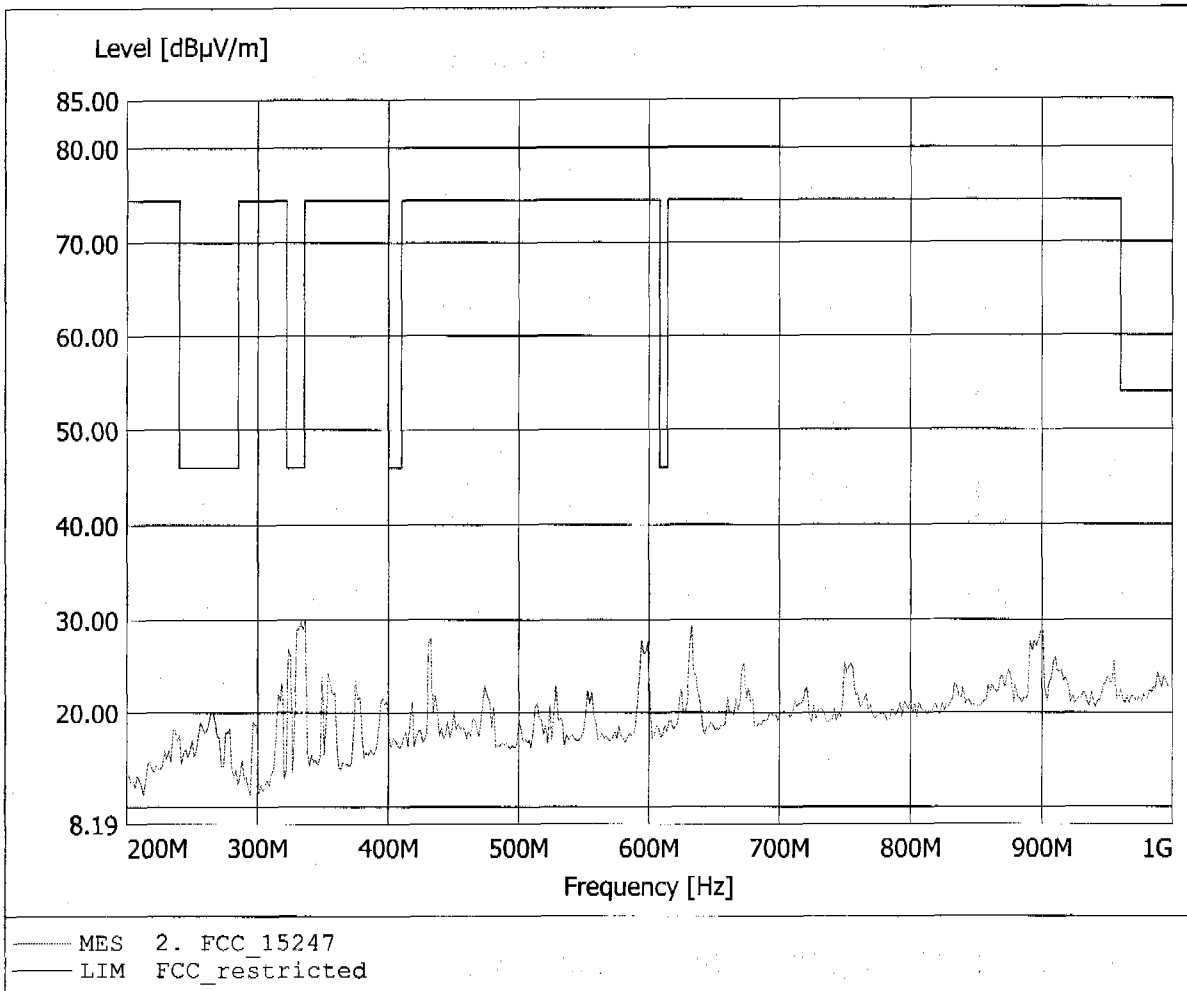


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2480 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 599.198MHz, Emax: 34.35dBµV/m, RBW: 100kHz

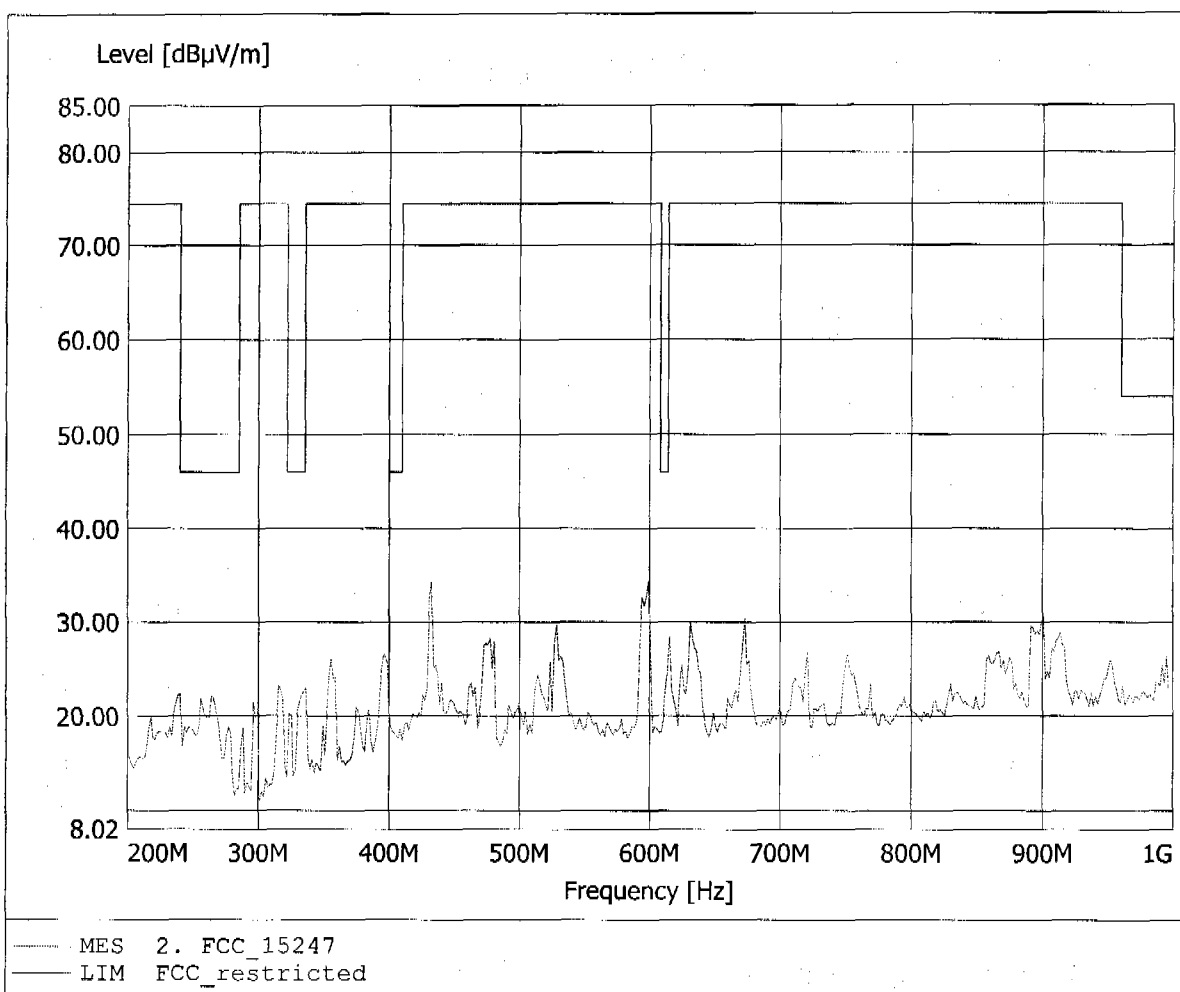


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2480 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.906GHz, Emax: 43.43dBµV/m, RBW: 1MHz

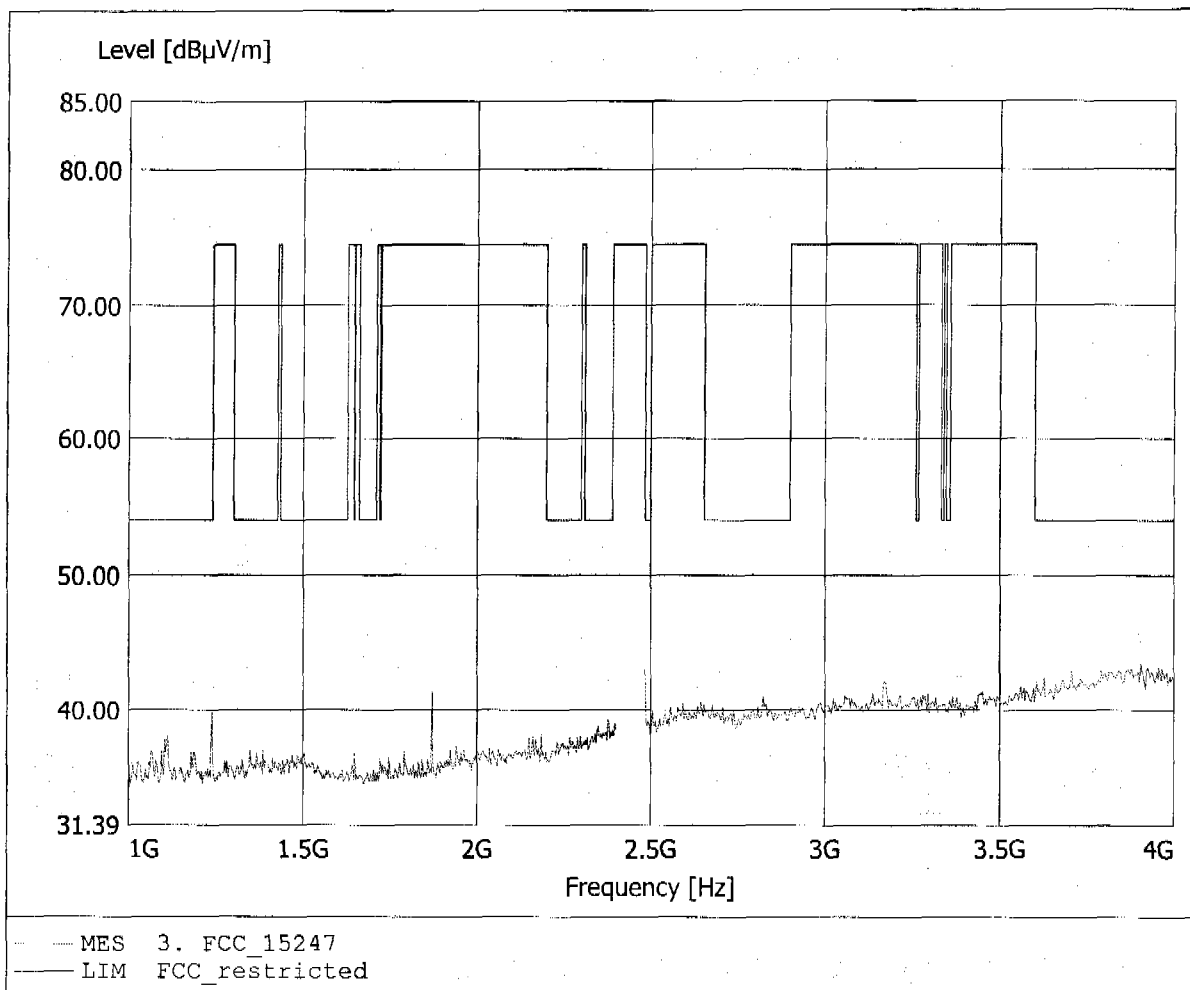


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2480 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.871GHz, Emax: 45.07dBµV/m, RBW: 1MHz

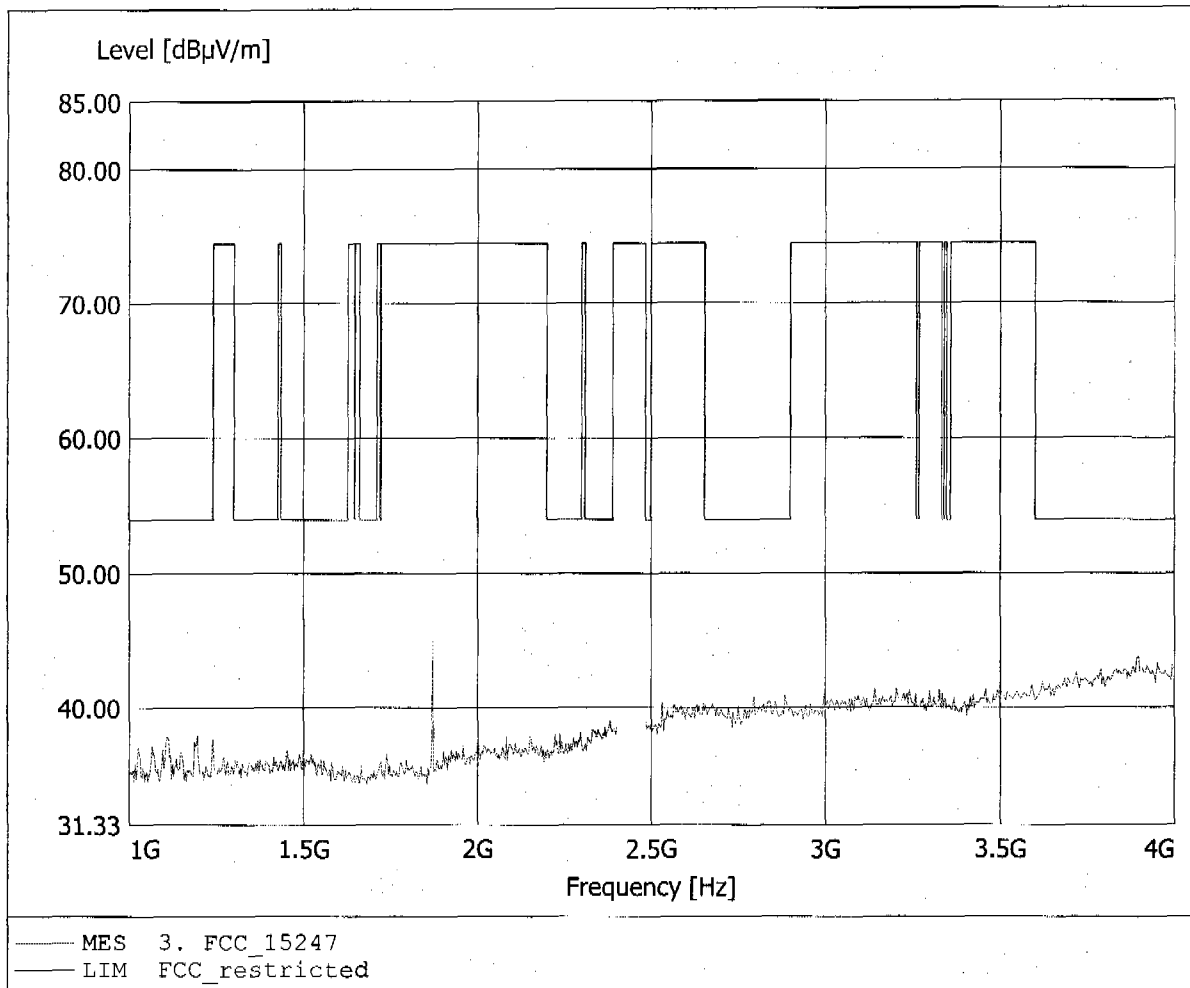


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2480 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.954GHz, Emax: 44.96dBµV/m, RBW: 1MHz

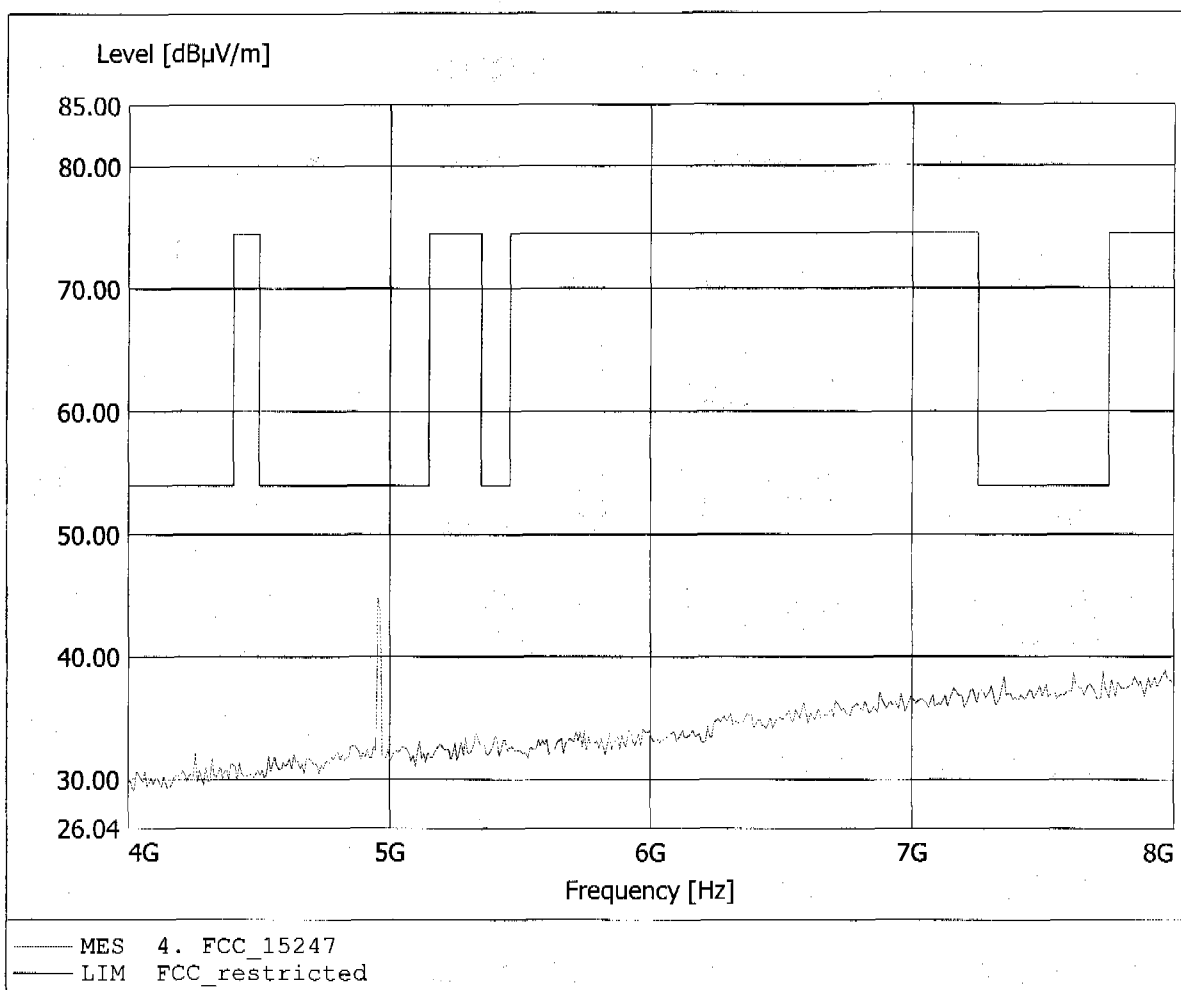


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2480 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.936GHz, Emax: 38.73dBµV/m, RBW: 1MHz

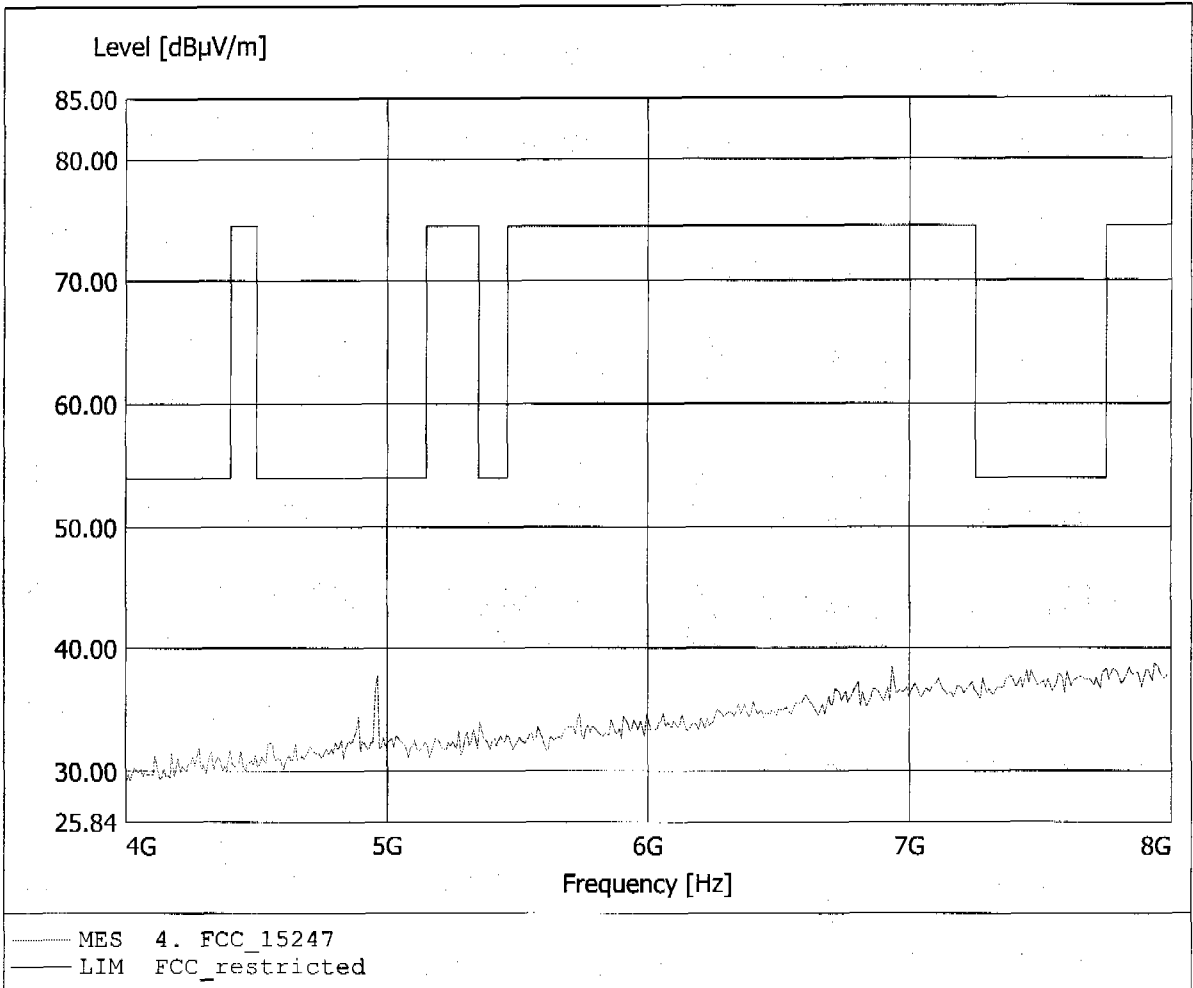


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2480 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.924GHz, Emax: 43.42dBµV/m, RBW: 1MHz

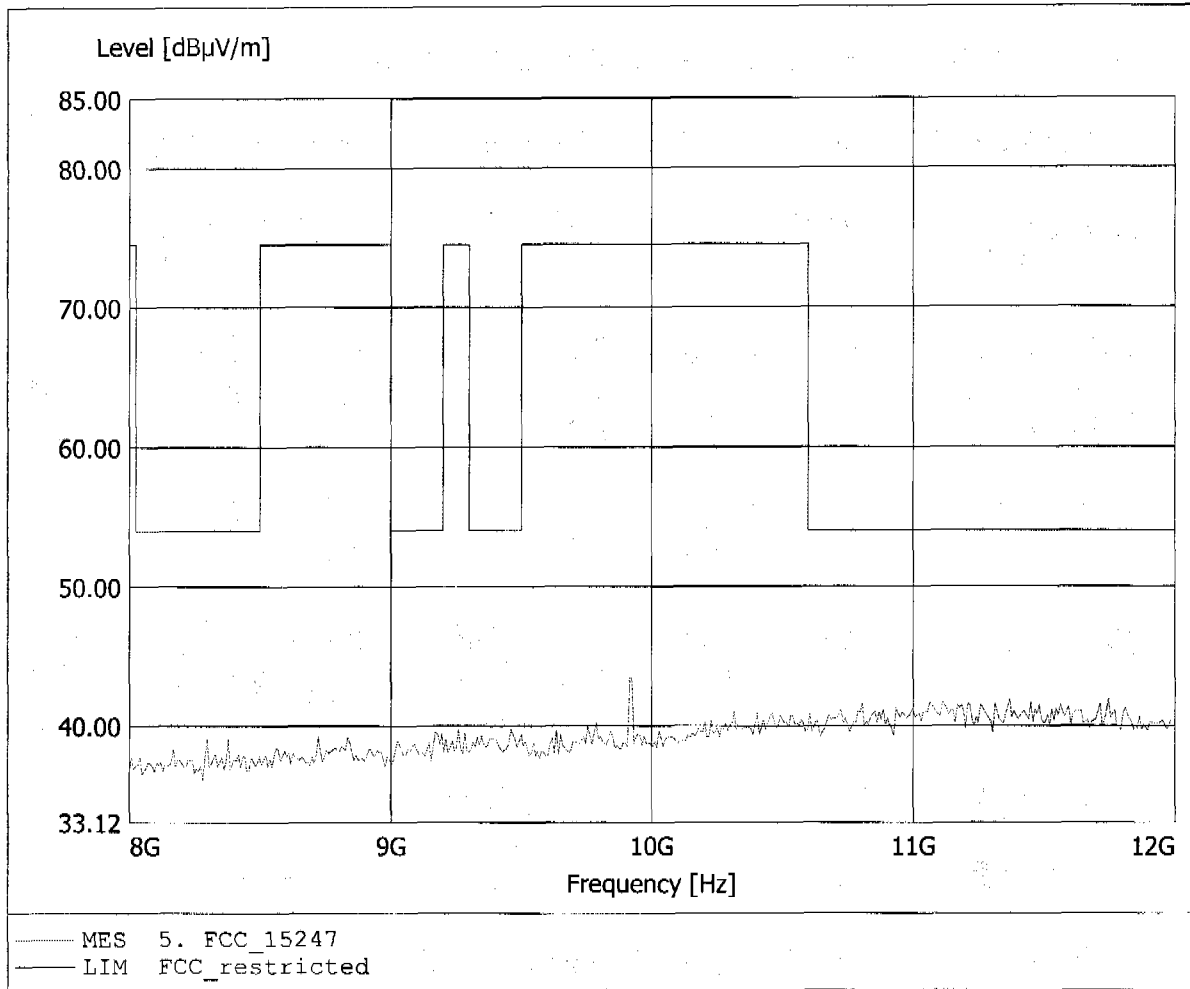


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2480 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.924GHz, Emax: 48.09dBµV/m, RBW: 1MHz

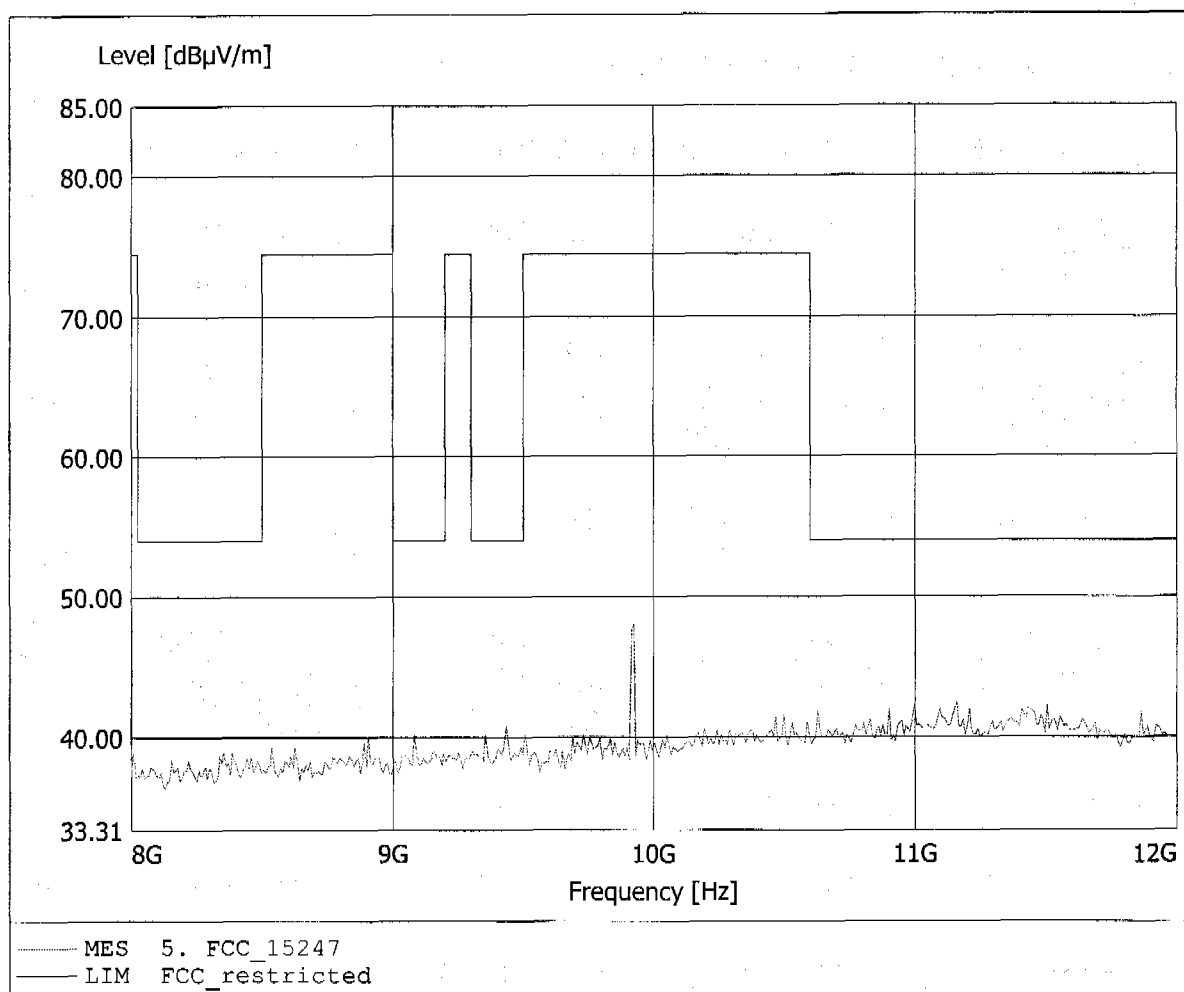


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2480 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.295GHz, Emax: 44.63dBµV/m, RBW: 1MHz

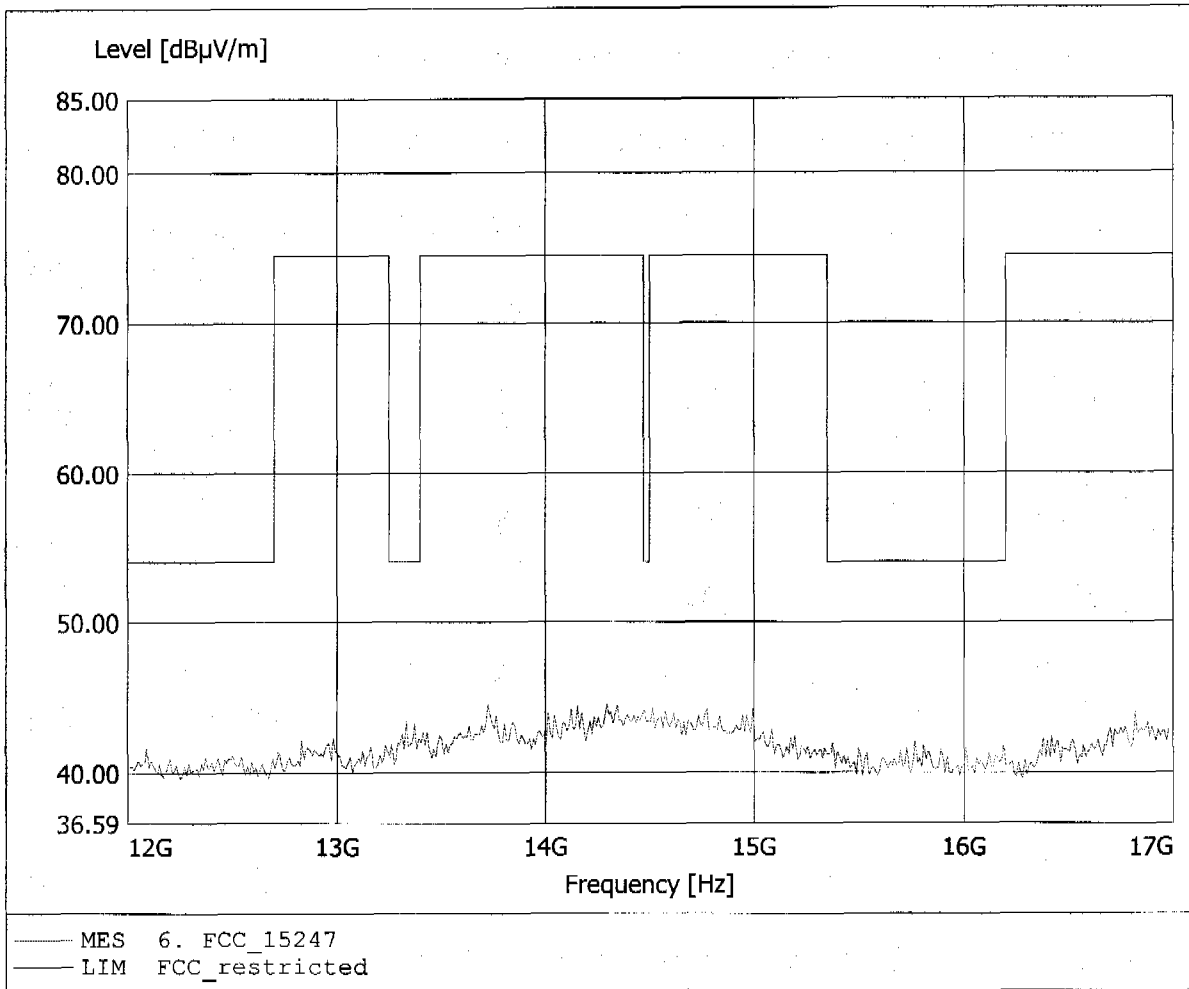


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2480 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.505GHz, Emax: 45.37dBµV/m, RBW: 1MHz

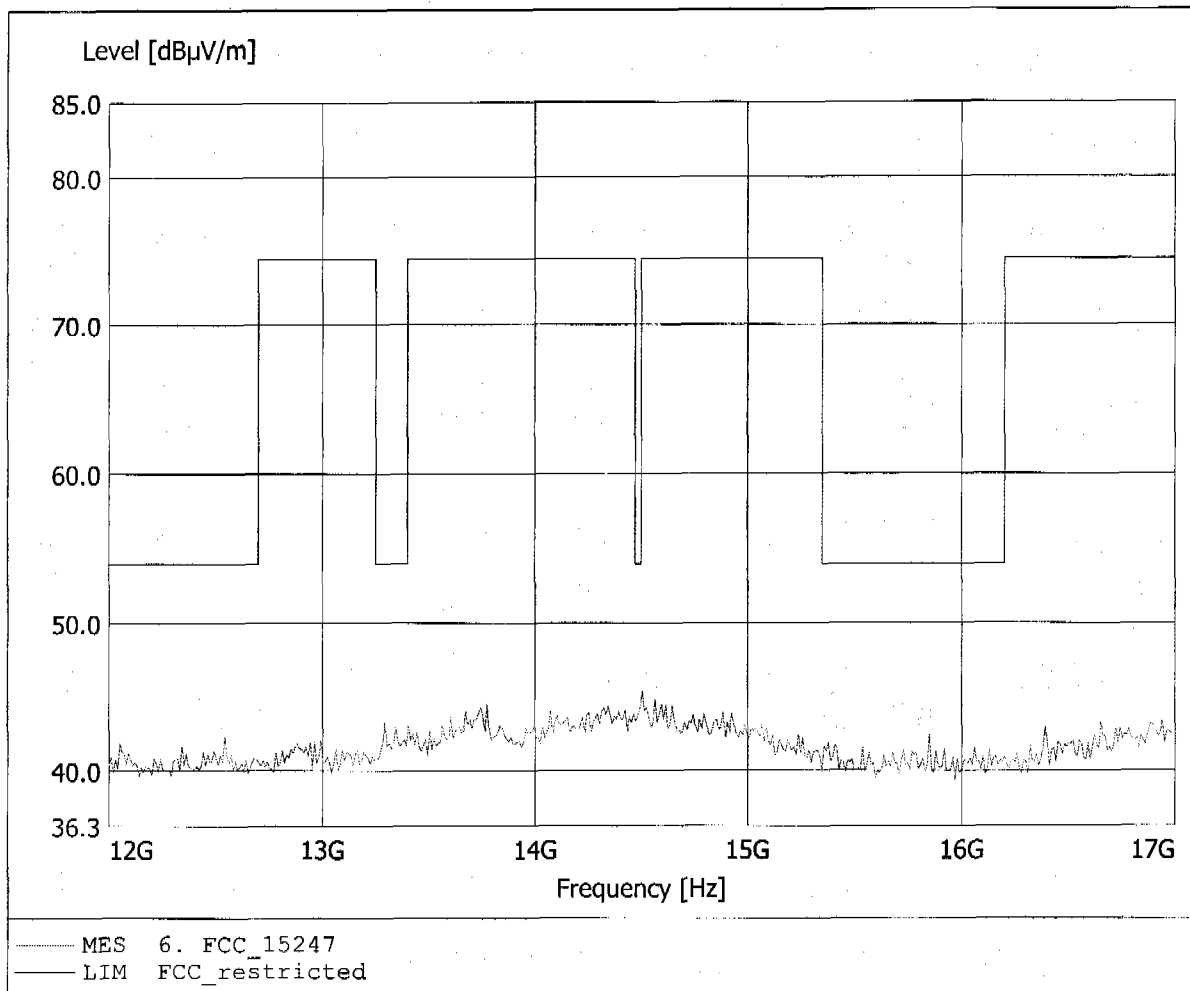


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2480 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.057GHz, Emax: 46.06dBµV/m, RBW: 1MHz

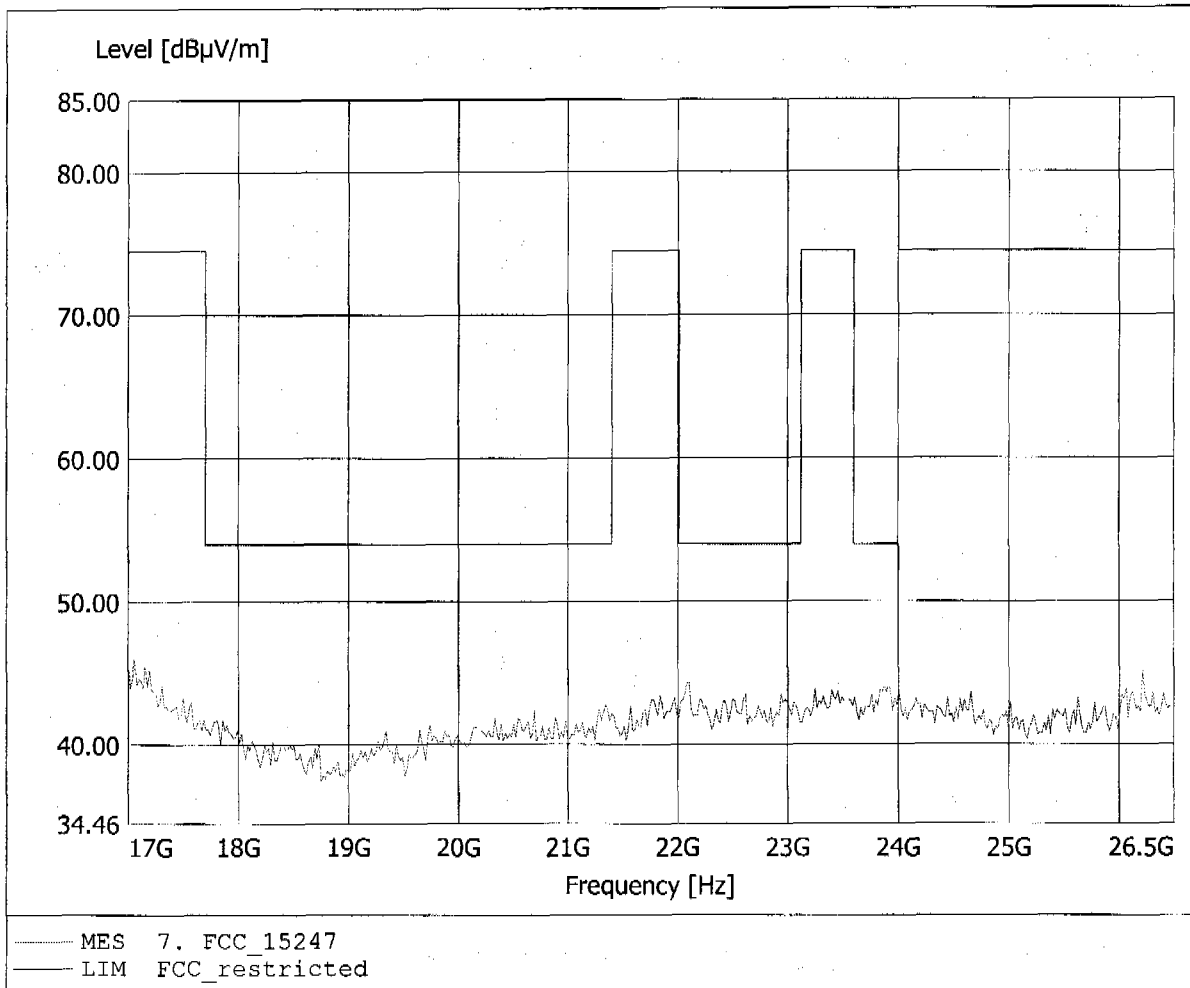

**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT : Bluetooth Headset 2480 MHz
Model: Jabra A - 210
Test Site / Operator: ETS / Mr. Pudell
Temperature/ Voltage: 25°C / Unom: 3,7 V DC add. 120V AC Adapter
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 46.23dBpV/m, RBW: 1MHz

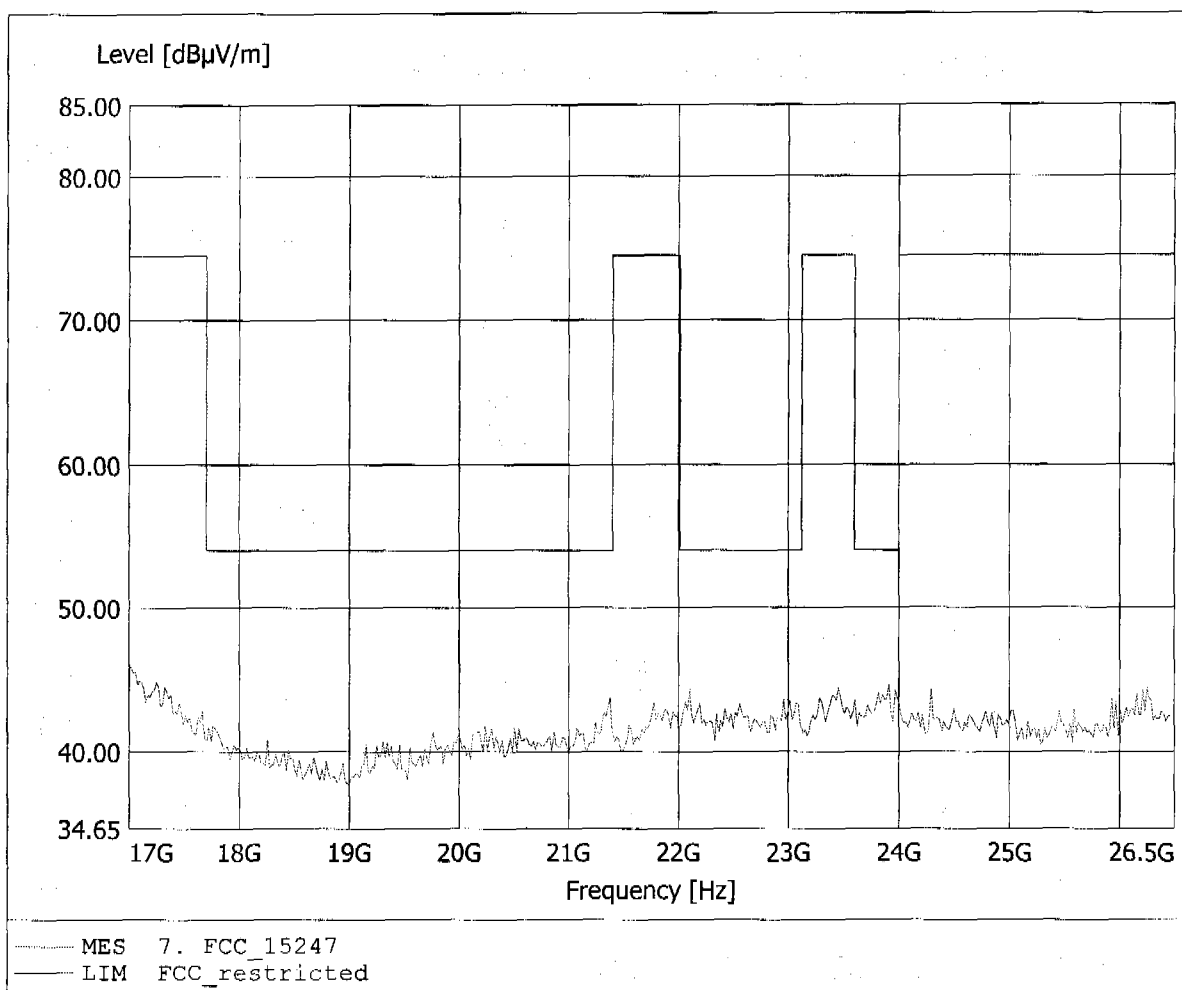



Appendix D

Spurious Emissions conducted - Transmitter operating




Appendix E

Carrier Frequency Separation



Delta 1 [T1] RBW 100 kHz RF Att 40 dB
Ref Lvl -0.07 dB VBW 100 kHz
25 dBm 1.00080160 MHz SWT 5 ms Unit dBm

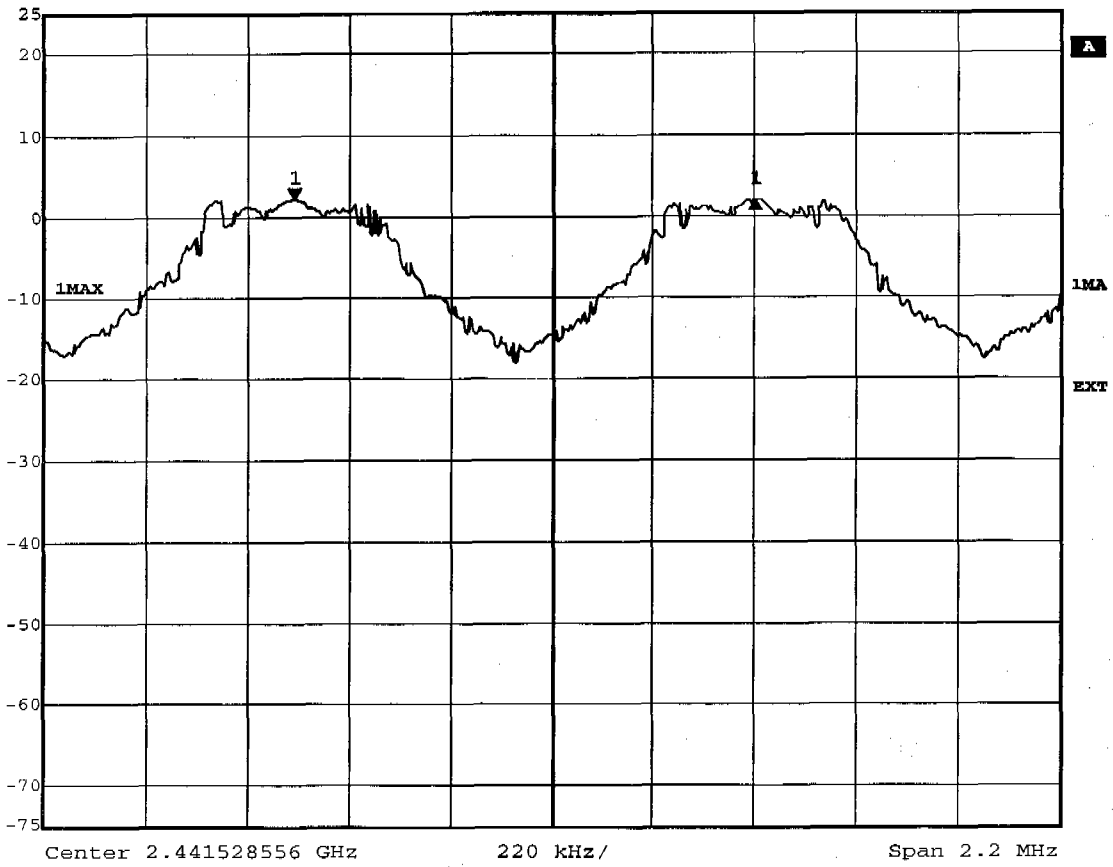

Title: Carrier Frequency Separation
Comment A: Jabra A-210
Date: 15.JUL.2004 14:16:58




Appendix F

Number of Hopping Frequencies



Ref Lvl
25 dBm

RBW 300 kHz RF Att 50 dB
VBW 300 kHz
SWT 5 ms Unit dBm

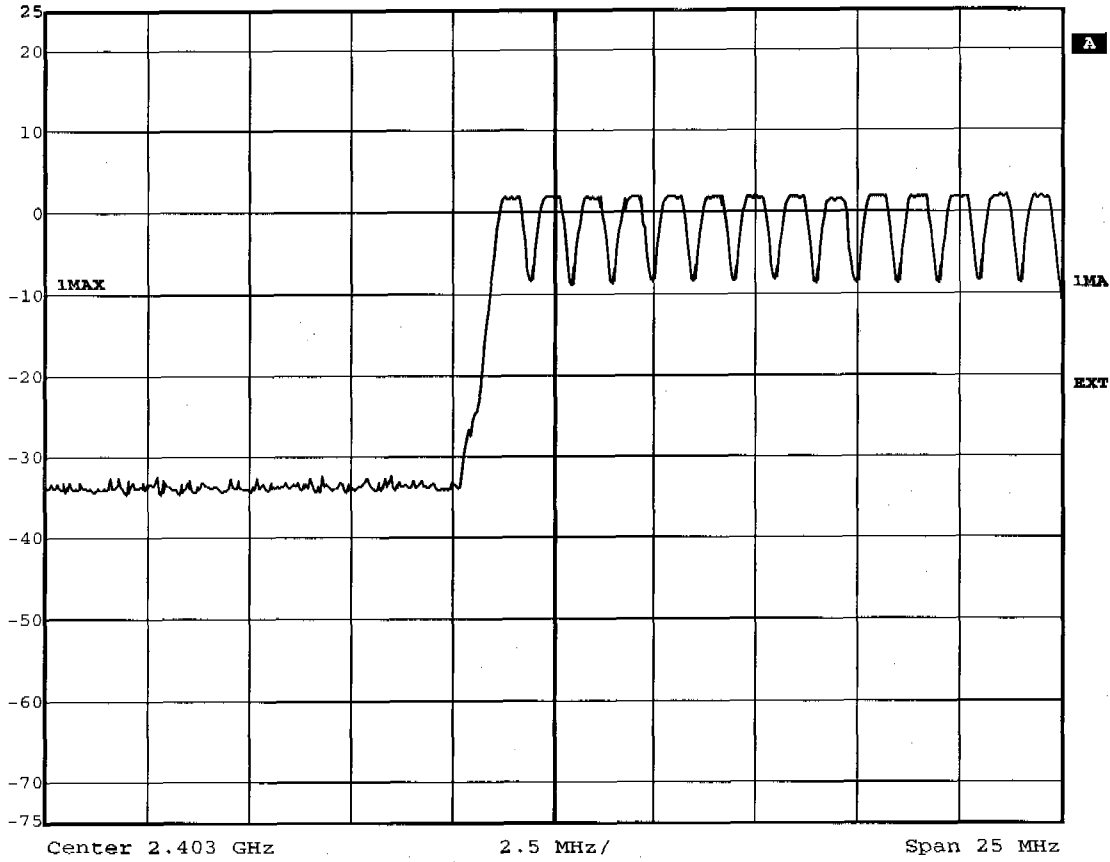


Title: Number of Hopping Frequencies Ch.: 0-13
Comment A: Jabra A-210
Date: 15.JUL.2004 15:31:45



Ref Lvl
25 dBm

RBW 300 kHz RF Att 50 dB
VBW 300 kHz
SWT 5 ms Unit dBm

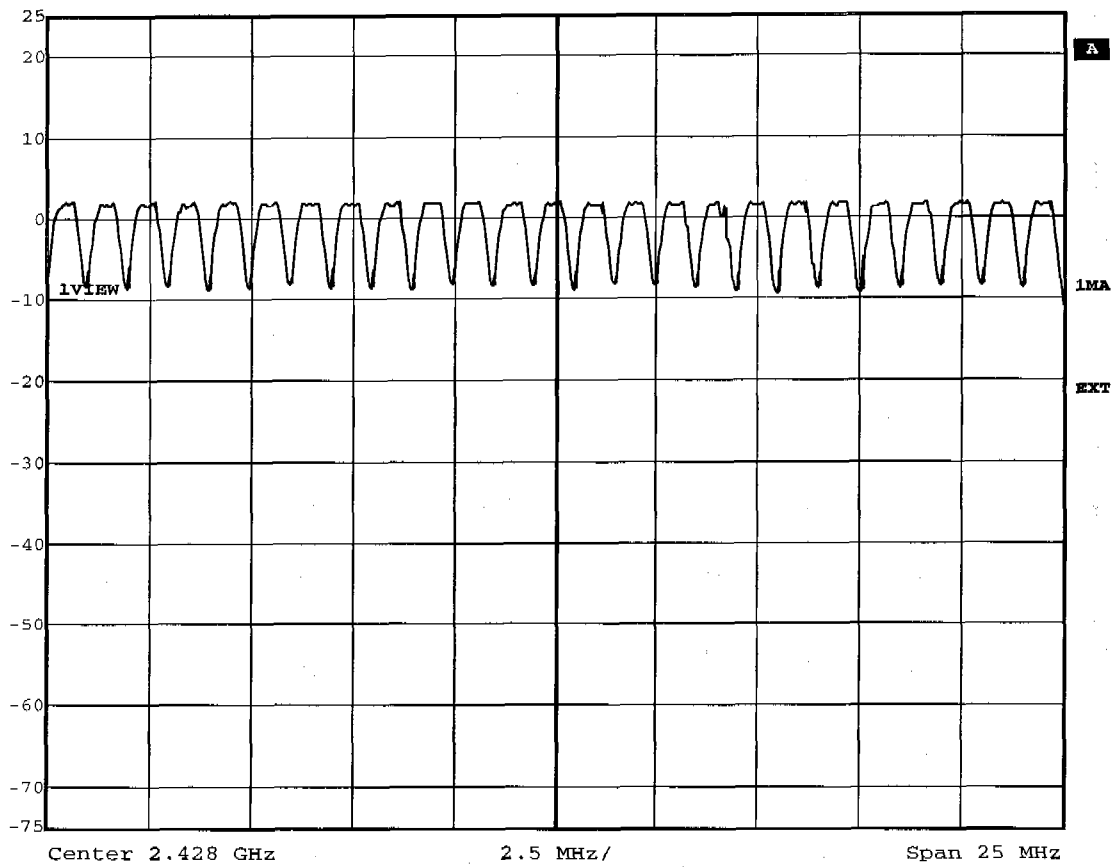


Title: Number of Hopping Frequencies Ch.: 14-38
Comment A: Jabra A-210
Date: 15.JUL.2004 15:22:21



Ref Lvl
25 dBm

RBW 300 kHz RF Att 50 dB
VBW 300 kHz
SWT 5 ms Unit dBm

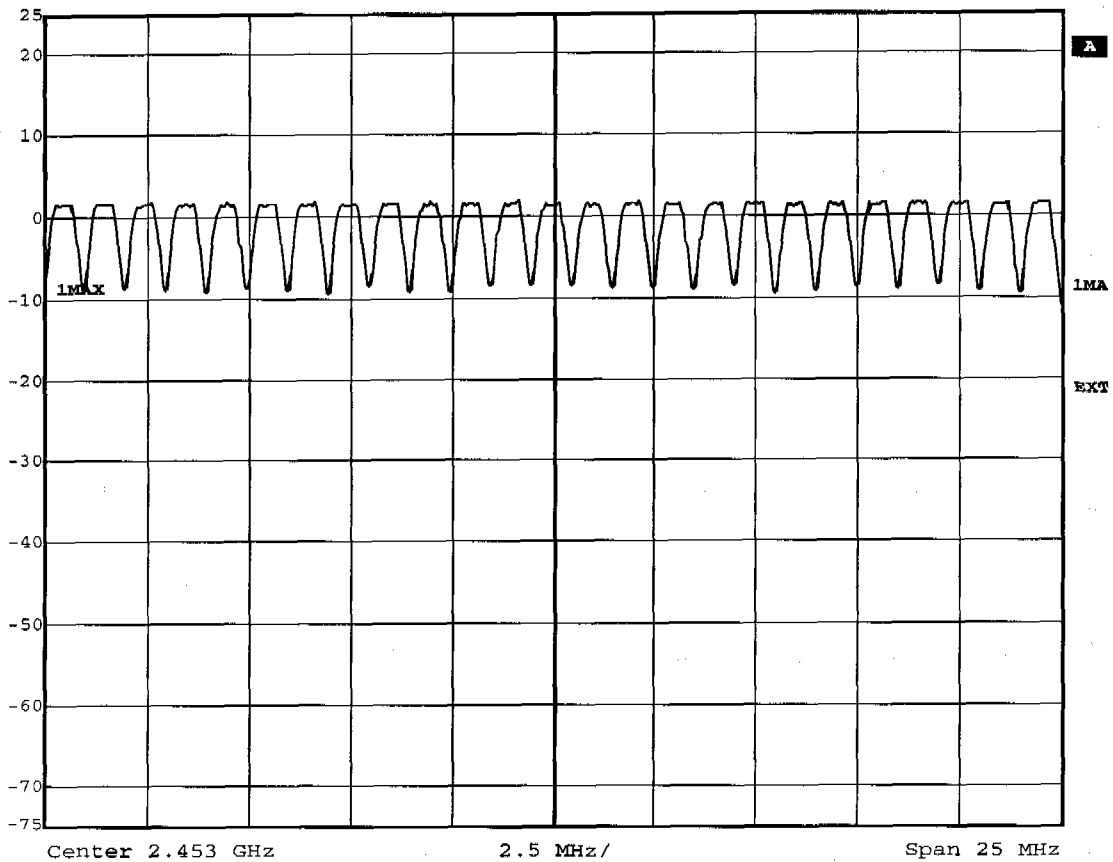


Title: Number of Hopping Frequencies Ch.: 39-63
Comment A: Jabra A-210
Date: 15.JUL.2004 15:24:47



Ref Lvl
25 dBm

RBW 300 kHz RF Att 50 dB
VBW 300 kHz
SWT 5 ms Unit dBm

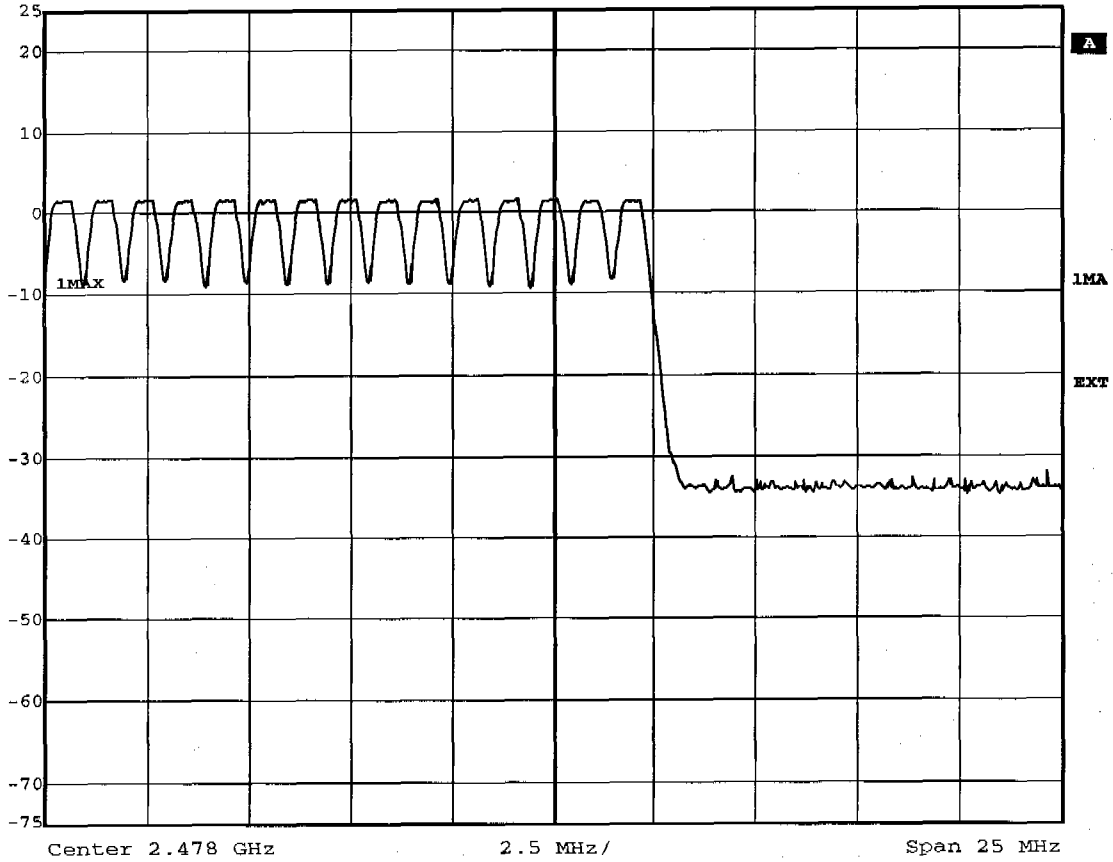

Title: Number of Hopping Frequencies Ch.: 64-78
Comment A: Jabra A-210
Date: 15.JUL.2004 15:27:49




Appendix G

Time of Occupancy (Dwell Time)



Delta 1 [T1] RBW 1 MHz RF Att 20 dB
Ref Lvl -0.53 dB VBW 1 MHz
5 dBm 2.912930 ms SWT 5 ms Unit dBm

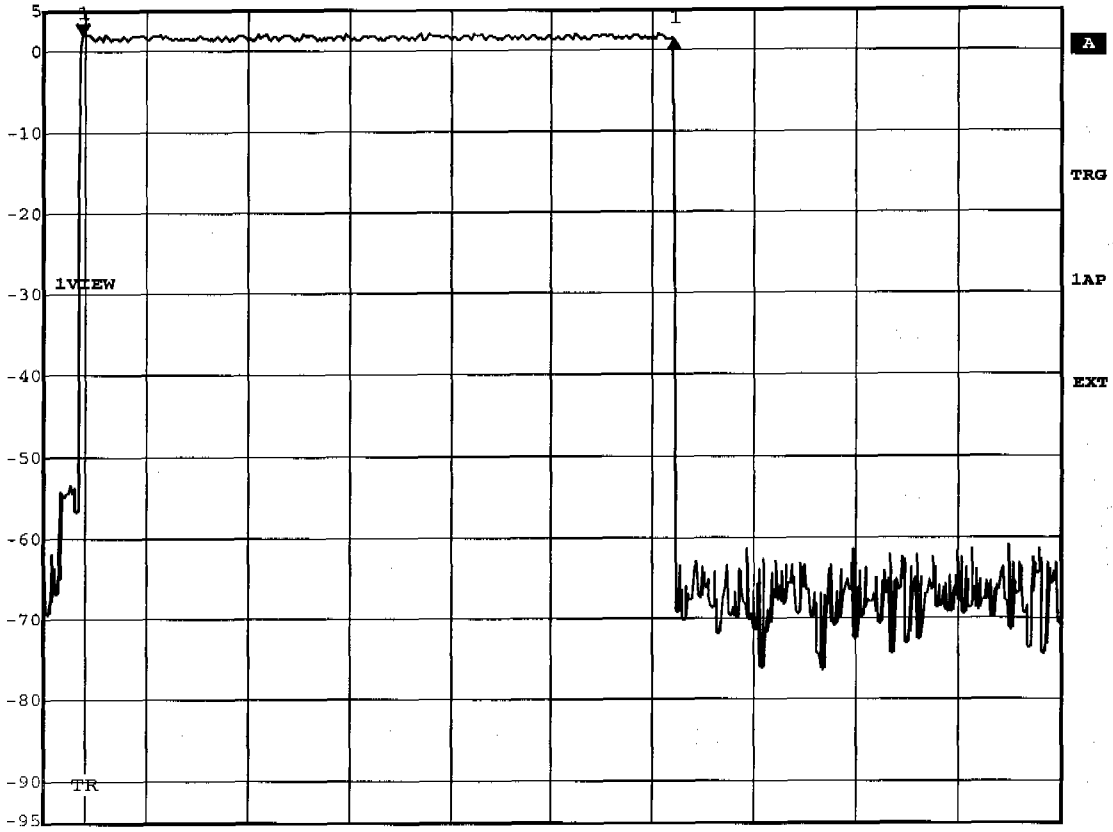


Center 2.441 GHz 500 ns/

Title: Time of occupancy (Hopping DH5) 63 events * 2.923ms=184.15ms
Comment A: Jabra A-210
Date: 15.JUL.2004 14:54:20



Delta 2 [T1] RBW 1 MHz RF Att 50 dB
Ref Lvl -0.02 dB VBW 1 MHz
29 dBm 6.288377 ms SWT 11 ms Unit dBm

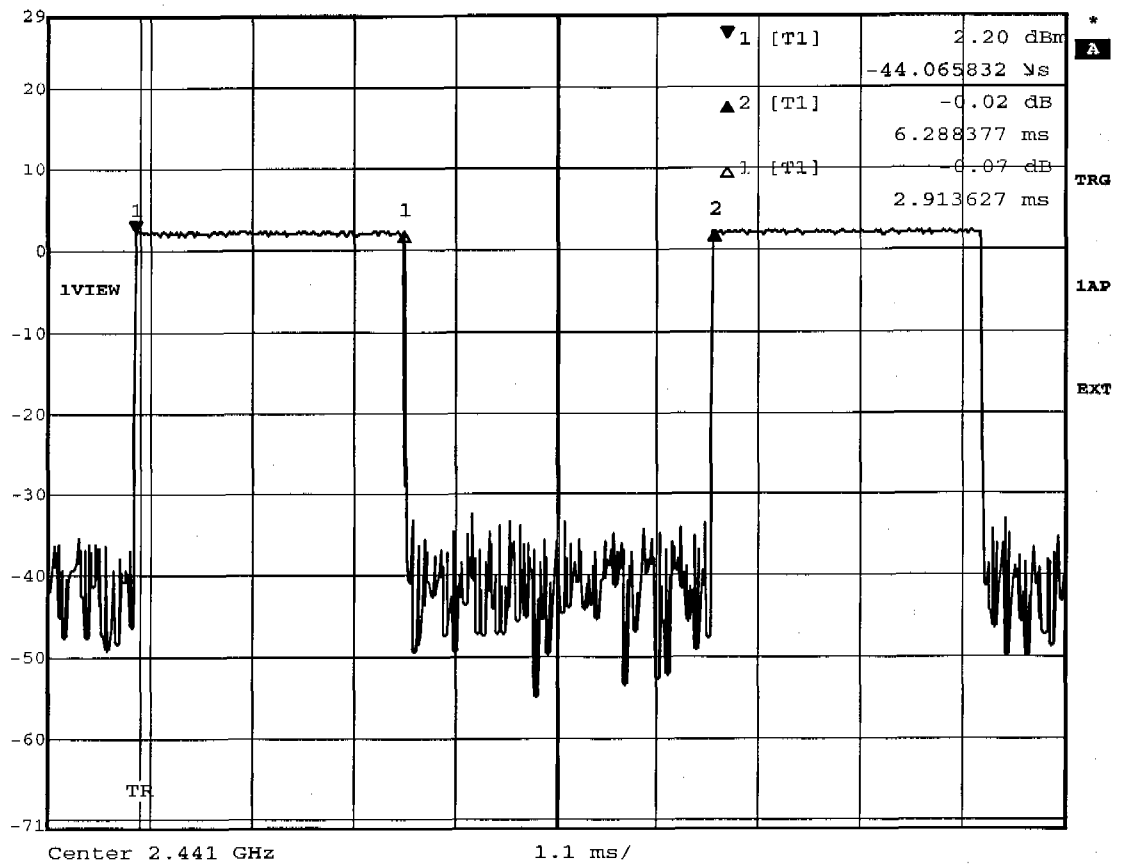

Title: Duty Cycle
Comment A: Jabra A-210
Date: 16.JUL.2004 09:24:22




Appendix H

20dB Bandwidth




Delta 1 [T1] RBW 10 kHz RF Att 50 dB
Ref Lvl -0.43 dB VBW 10 kHz
25 dBm 714.22845691 kHz SWT 56 ms Unit dBm

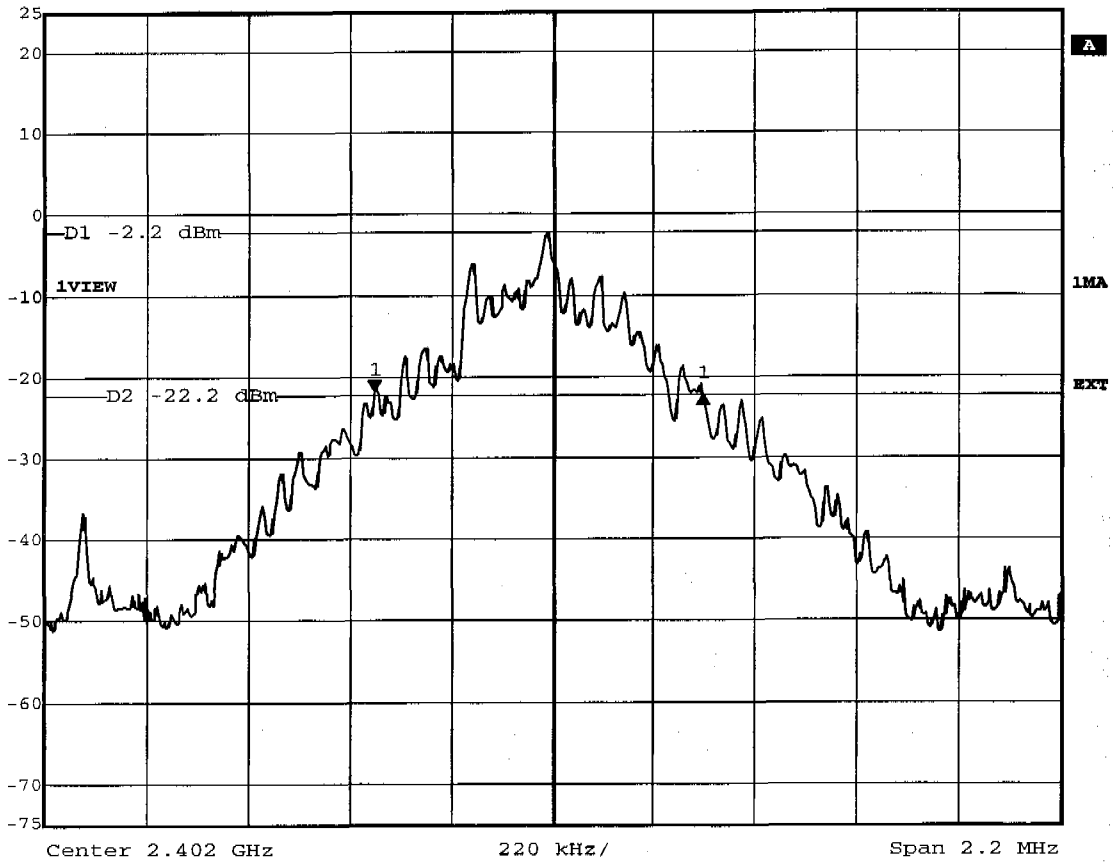

Title: -20dB Bandwidth Ch.: 0
Comment A: Jabra A-210
Date: 15.JUL.2004 14:04:32




Delta 1 [T1] RBW 10 kHz RF Att 50 dB
Ref Lvl 0.07 dB VBW 10 kHz
25 dBm 714.22845691 kHz SWT 56 ms Unit dBm

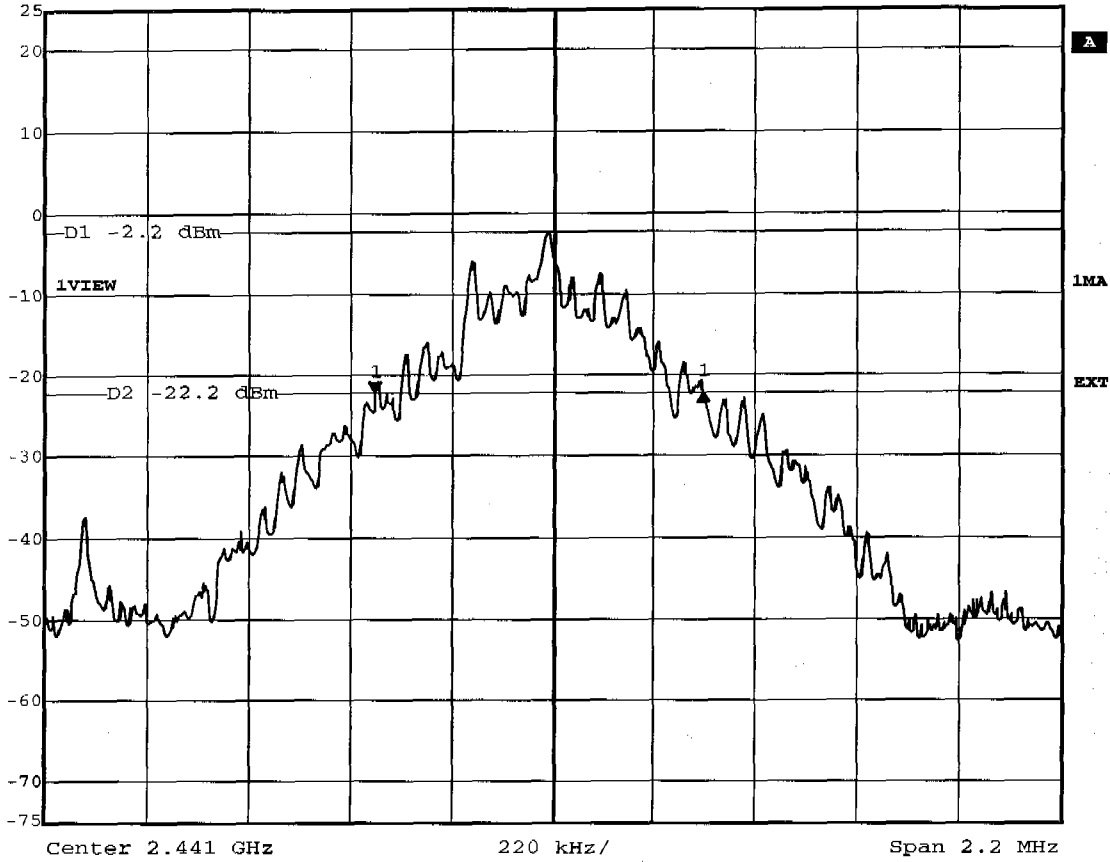

Title: -20dB Bandwidth Ch.: 39
Comment A: Jabra A-210
Date: 15.JUL.2004 14:06:47



Delta 1 [T1] RBW 10 kHz RF Att 50 dB
Ref Lvl 0.54 dB VBW 10 kHz
25 dBm 714.22845691 kHz SWT 56 ms Unit dBm

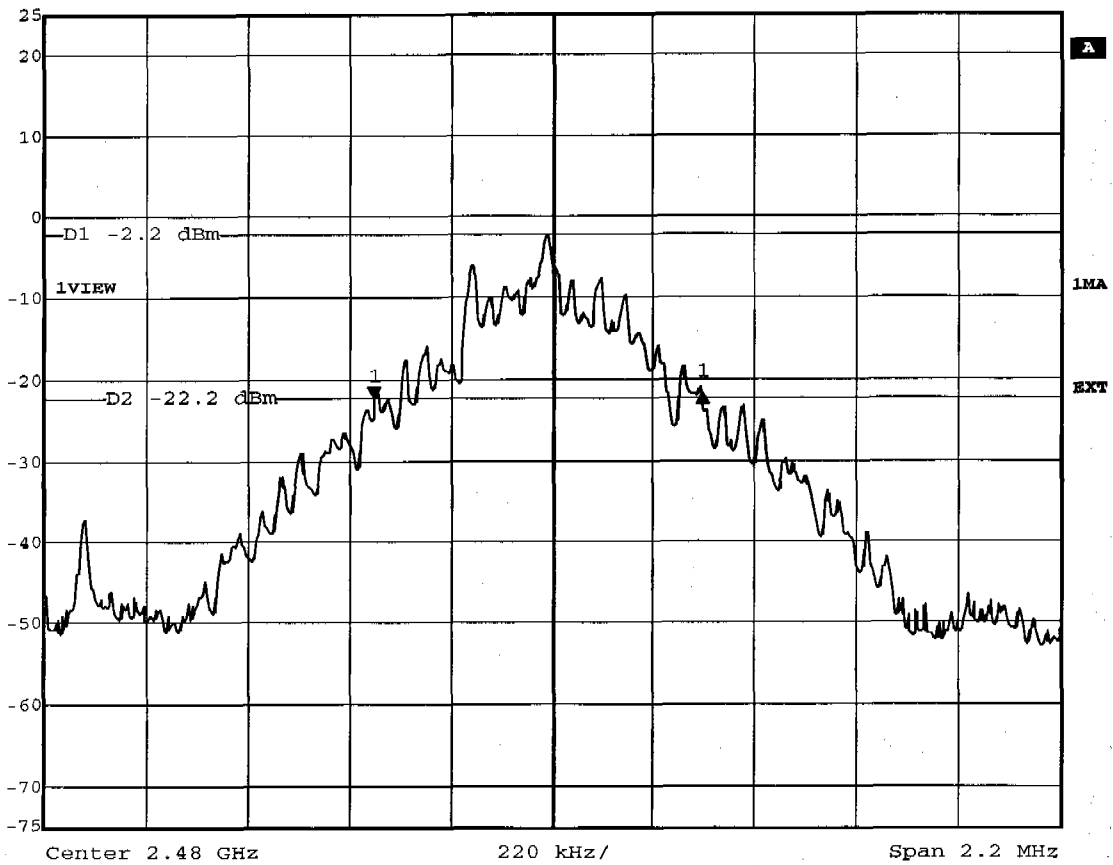

Title: -20dB Bandwidth Ch.: 78
Comment A: Jabra A-210
Date: 15.JUL.2004 14:11:34




Appendix I

Band-edge Compliance of RF Emissions




Delta 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl 35.27 dB VBW 50 kHz
25 dBm 1.97895792 MHz SWT 5 ms Unit dBm

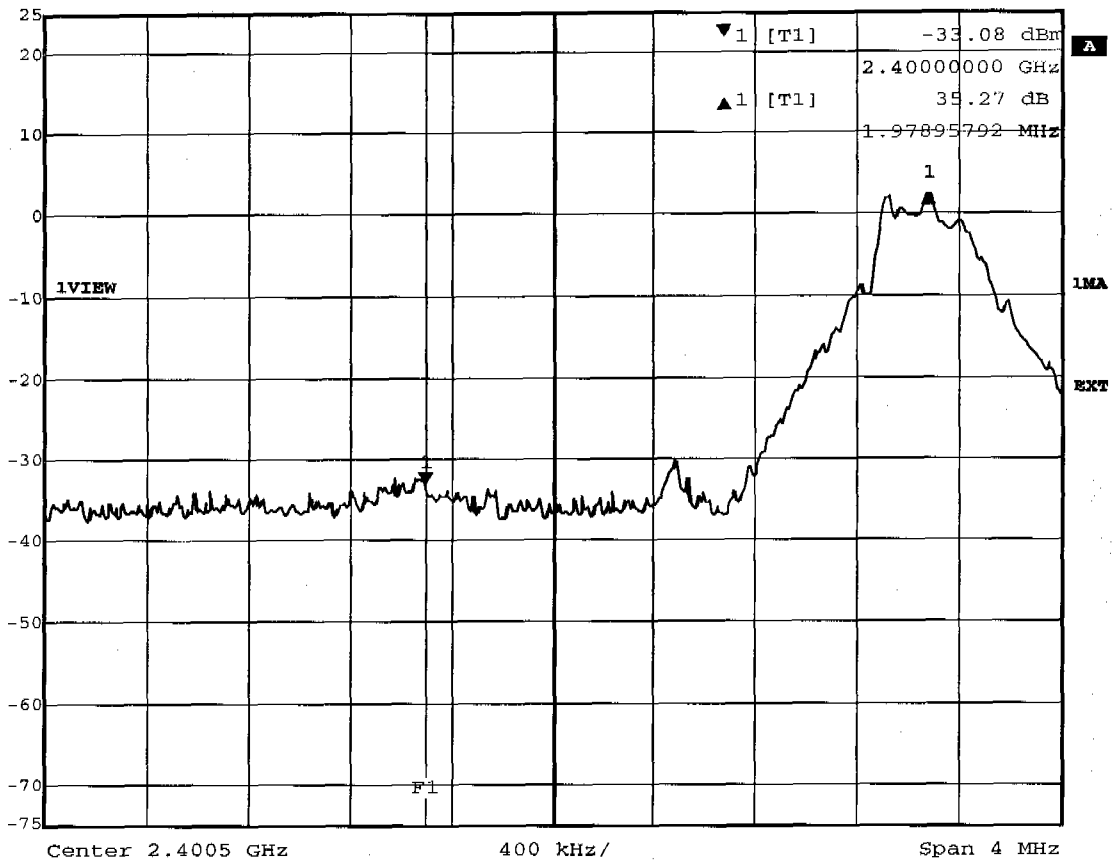

Title: Band-edge Compliance (conducted, single frequ. mode)
Comment A: Jabra A-210
Date: 15.JUL.2004 14:28:20



Delta 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl 39.02 dB VBW 50 kHz
25 dBm -3.52332665 MHz SWT 5 ms Unit dBm

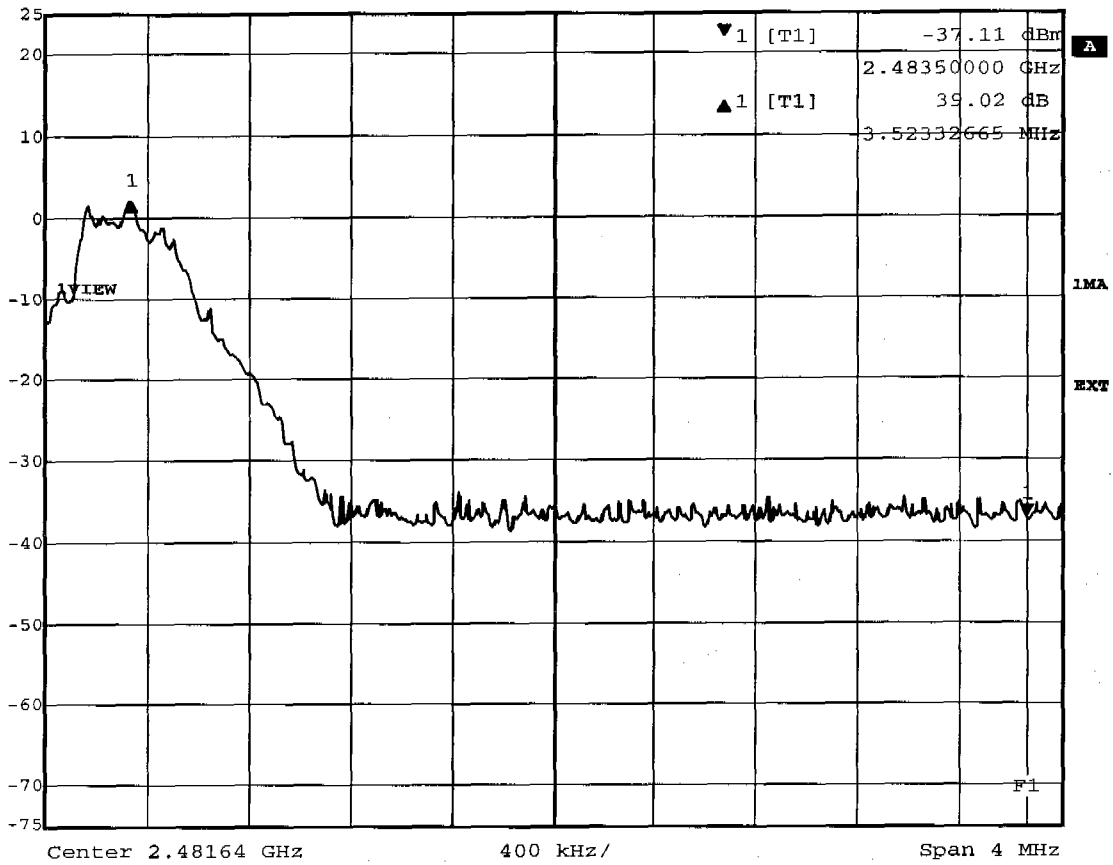


Title: Band-edge Compliance (conducted, single frequ. mode)

Comment A: Jabra A-210

Date: 15.JUL.2004 14:44:00




Delta 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl 37.20 dB VBW 50 kHz
25 dBm 1.98697395 MHz SWT 5 ms Unit dBm

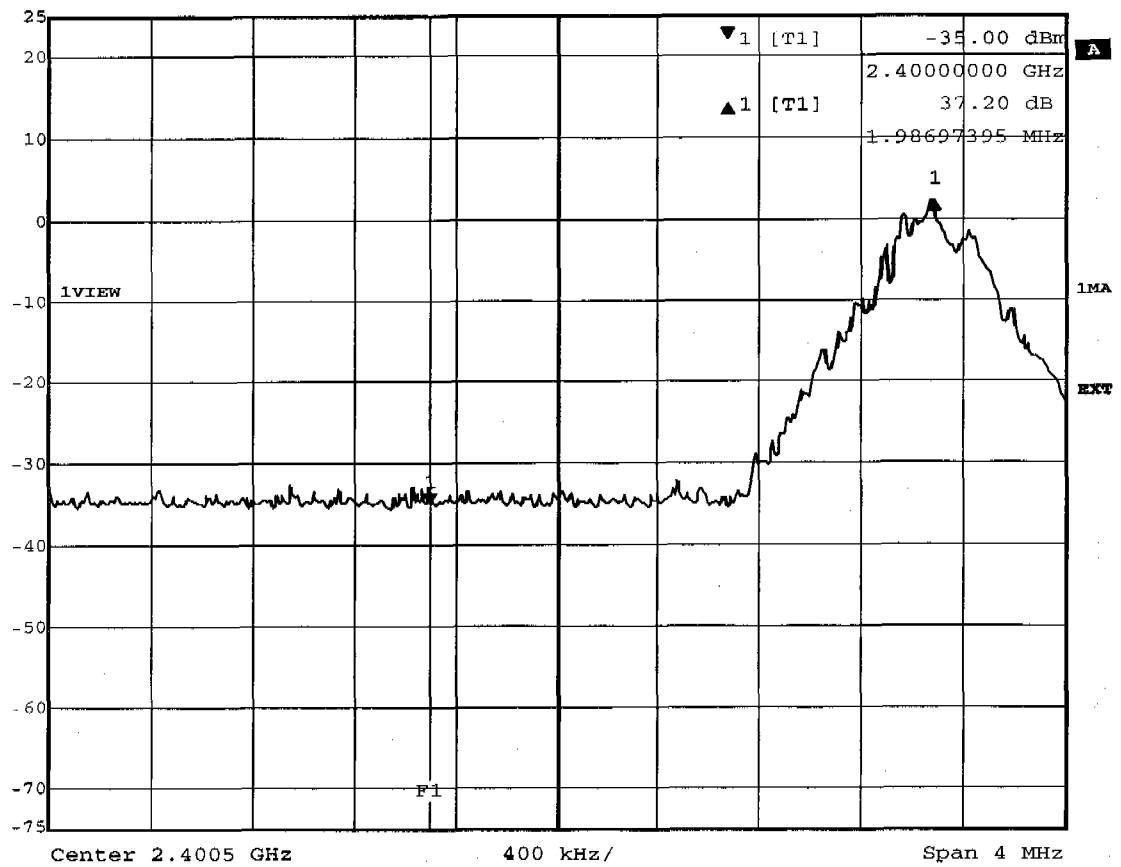

Title: Band-edge Compliance (conducted, hopping mode)
Comment A: Jabra A-210
Date: 15.JUL.2004 14:25:22



Delta 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl 35.31 dB VBW 50 kHz
25 dBm -3.63555110 MHz SWT 5 ms Unit dBm

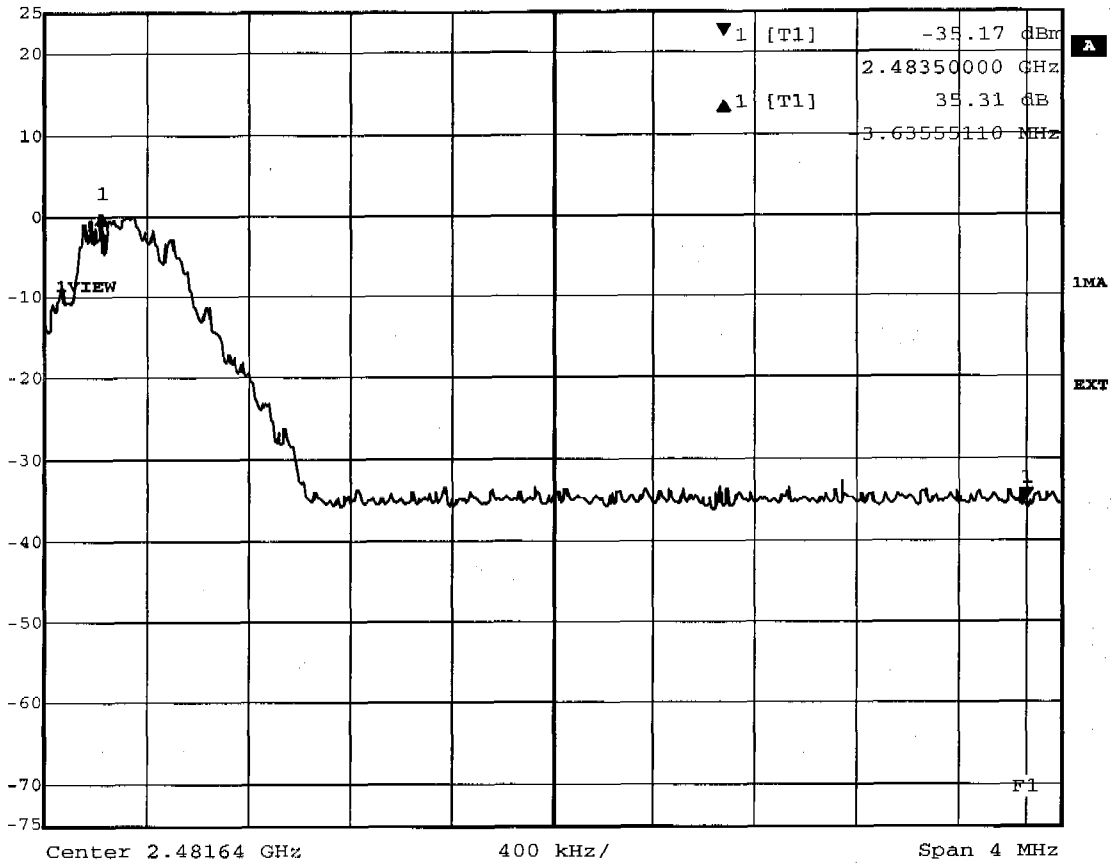

Title: Band-edge Compliance (conducted, hopping mode)
Comment A: Jabra A-210
Date: 15.JUL.2004 14:39:03




Appendix J

Conducted Measurement at (AC) Power Line

EMI voltage test in the ac-mains according to FCC part 15

EUT: Bluetooth Headset
 Manufacturer: GN Netcom
 Operating Condition: Unom: 120 VAC , Tnom: 23°C
 Test Site: ETS
 Operator: Mr. Marquardt
 Test Specification: V-Network: ESH2-Z5 (L1)
 Comment: model: Jabra A-210 mode: charging + link

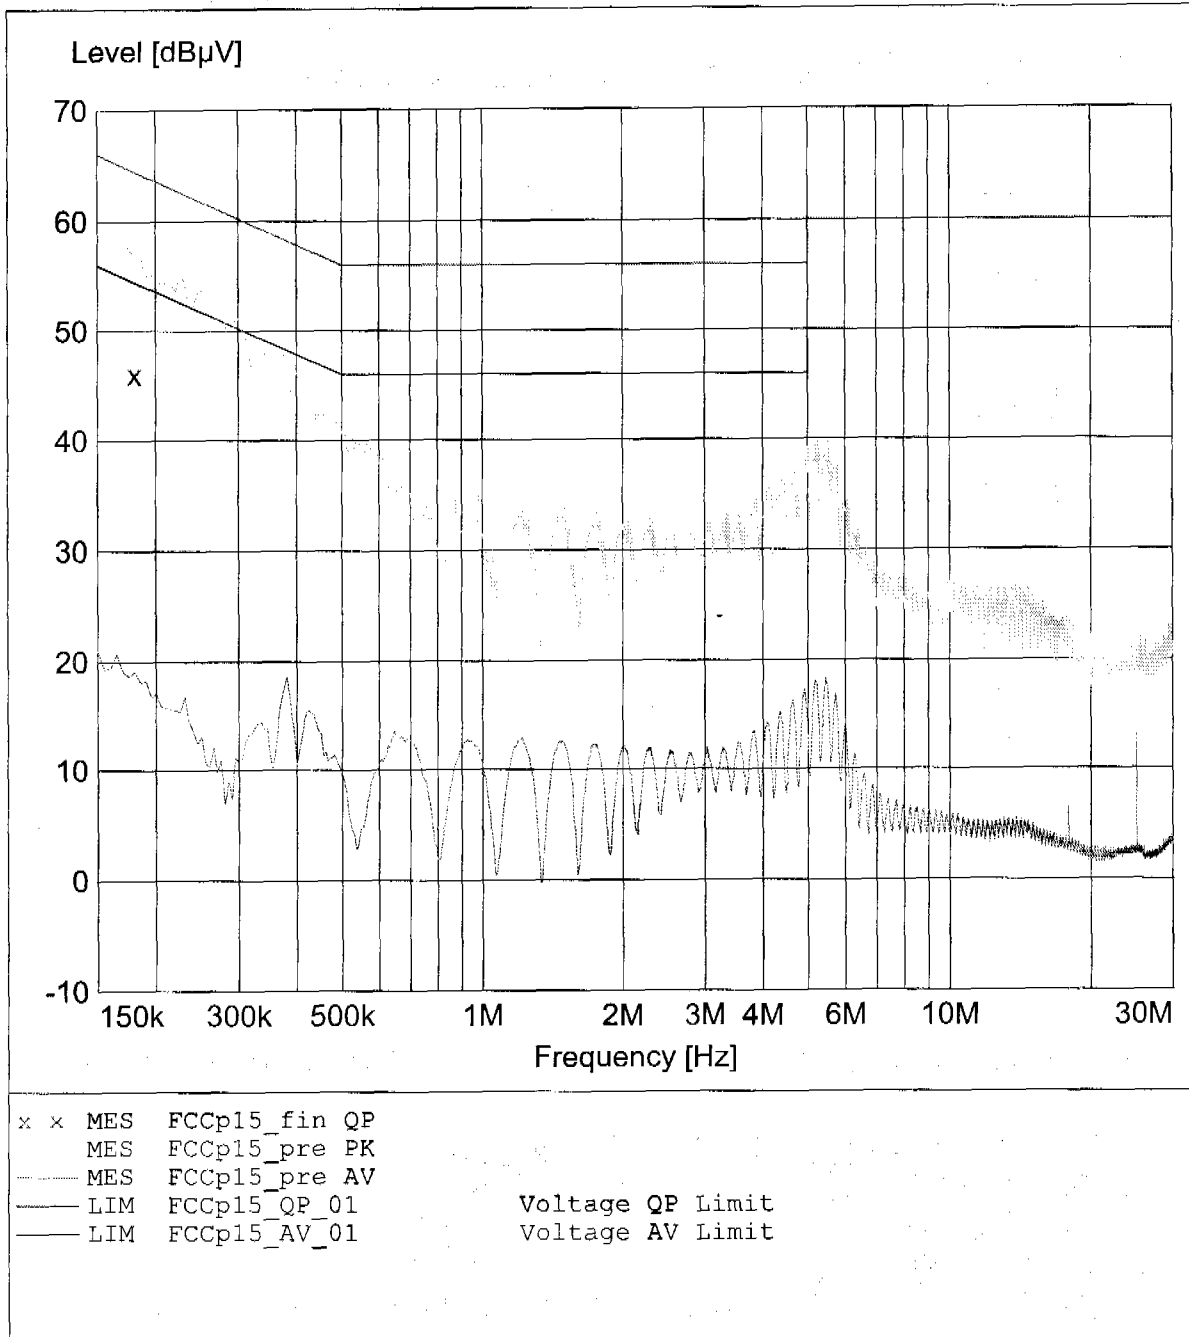

EMI voltage test in the ac-mains according to FCC part 15

EUT: Bluetooth Headset
 Manufacturer: GN Netcom
 Operating Condition: Unom: 120 VAC , Tnom: 23°C
 Test Site: ETS
 Operator: Mr. Marquardt
 Test Specification: V-Network: ESH2-Z5 (N)
 Comment: model: Jabra A-210 mode: charging + link

