




## Appendix B

Peak Output Power




Marker 1 [T1] RBW 1 MHz RF Att 40 dB  
Ref Lvl 3.02 dBm VBW 1 MHz  
20 dBm 2.40211924 GHz SWT 5 ms Unit dBm

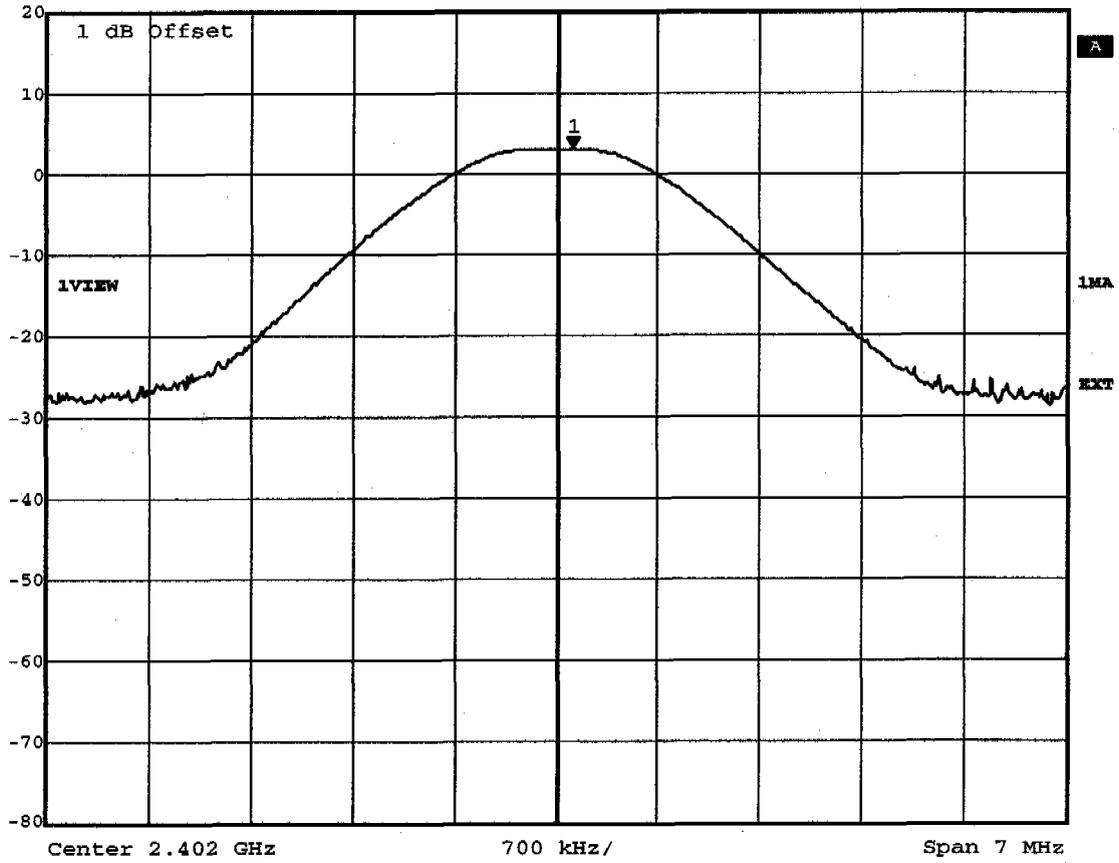

Title: Peak Output Power conducted Ch.: 0  
Comment A: Jabra BT110  
Date: 29.JUL.2004 08:34:07




Marker 1 [T1] RBW 1 MHz RF Att 40 dB  
Ref Lvl 3.18 dBm VBW 1 MHz  
20 dBm 2.44110521 GHz SWT 5 ms Unit dBm

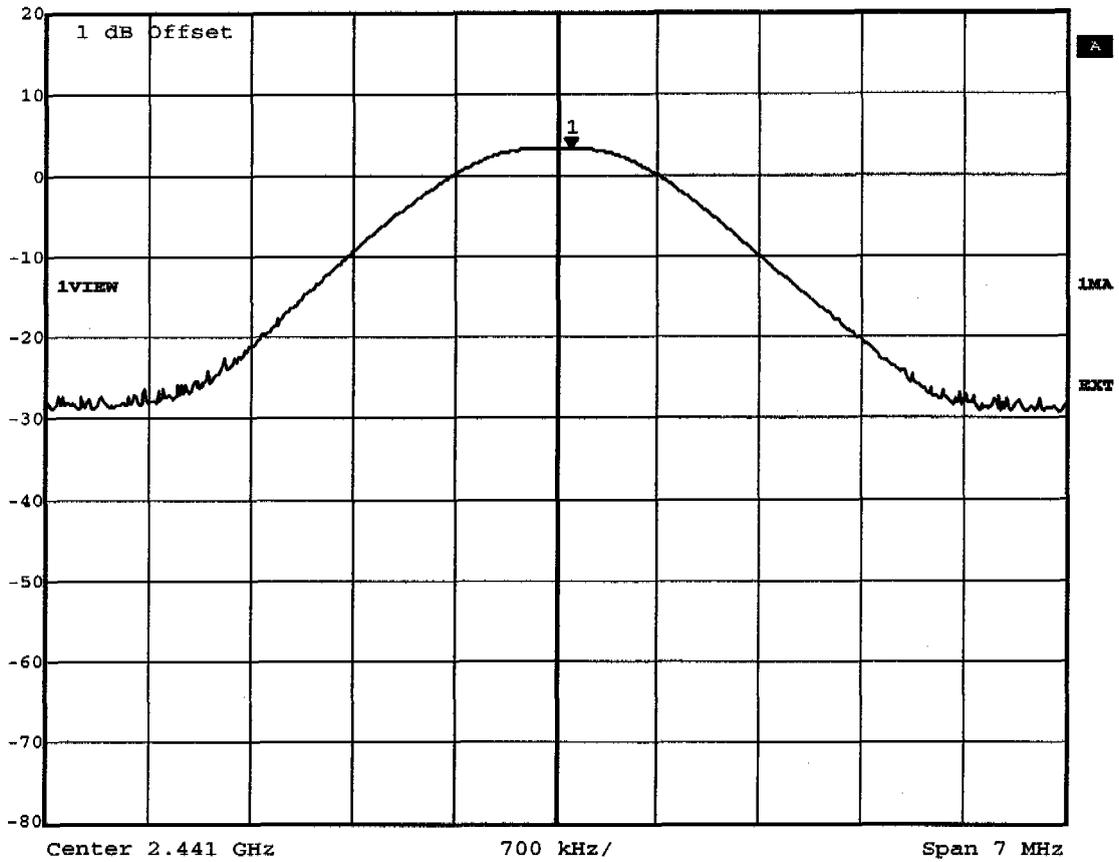

Title: Peak Output Power conducted Ch.: 39  
Comment A: Jabra BT110  
Date: 29.JUL.2004 08:37:12




Marker 1 [T1]	RBW	1 MHz	RF Att	40 dB
Ref Lvl	2.93 dBm	VBW	1 MHz	
20 dBm	2.48007715 GHz	SWT	5 ms	Unit dBm

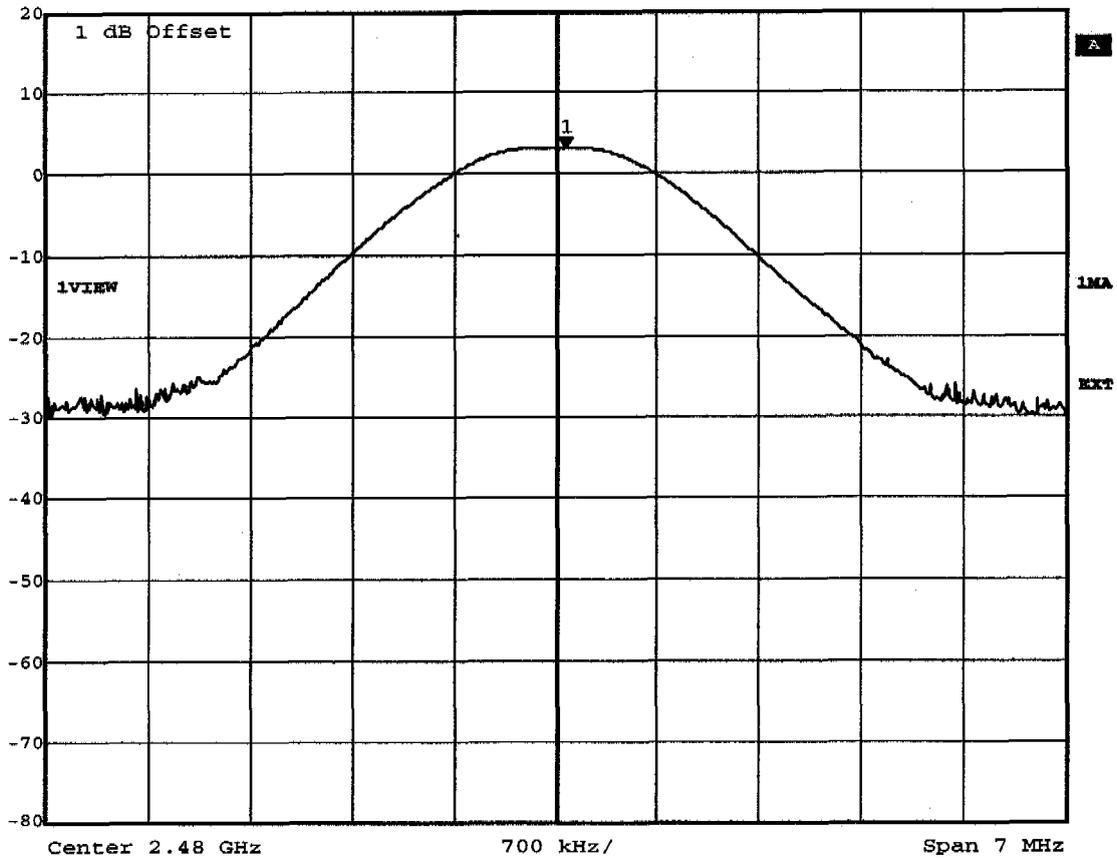

Title: Peak Output Power conducted Ch.: 78  
Comment A: Jabra BT110  
Date: 29.JUL.2004 08:37:56


**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2402MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: BBHA9120D  
Comment 2: Freq: 2.402GHz, Pmax: 3.36dBm, RBW: 5MHz

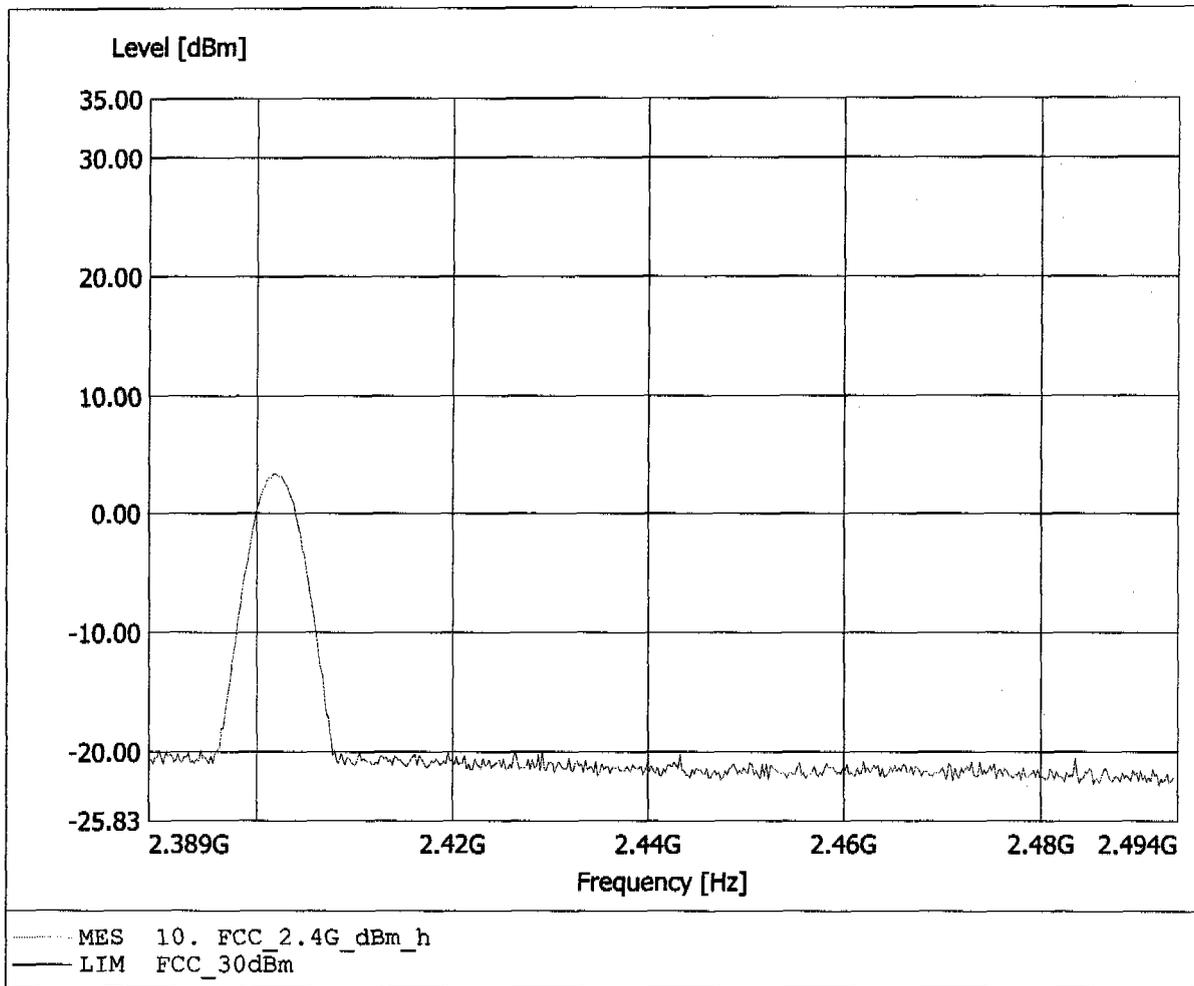


**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2402MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: BBHA9120D  
Comment 2: Freq: 2.402GHz, Pmax: 0.92dBm, RBW: 5MHz

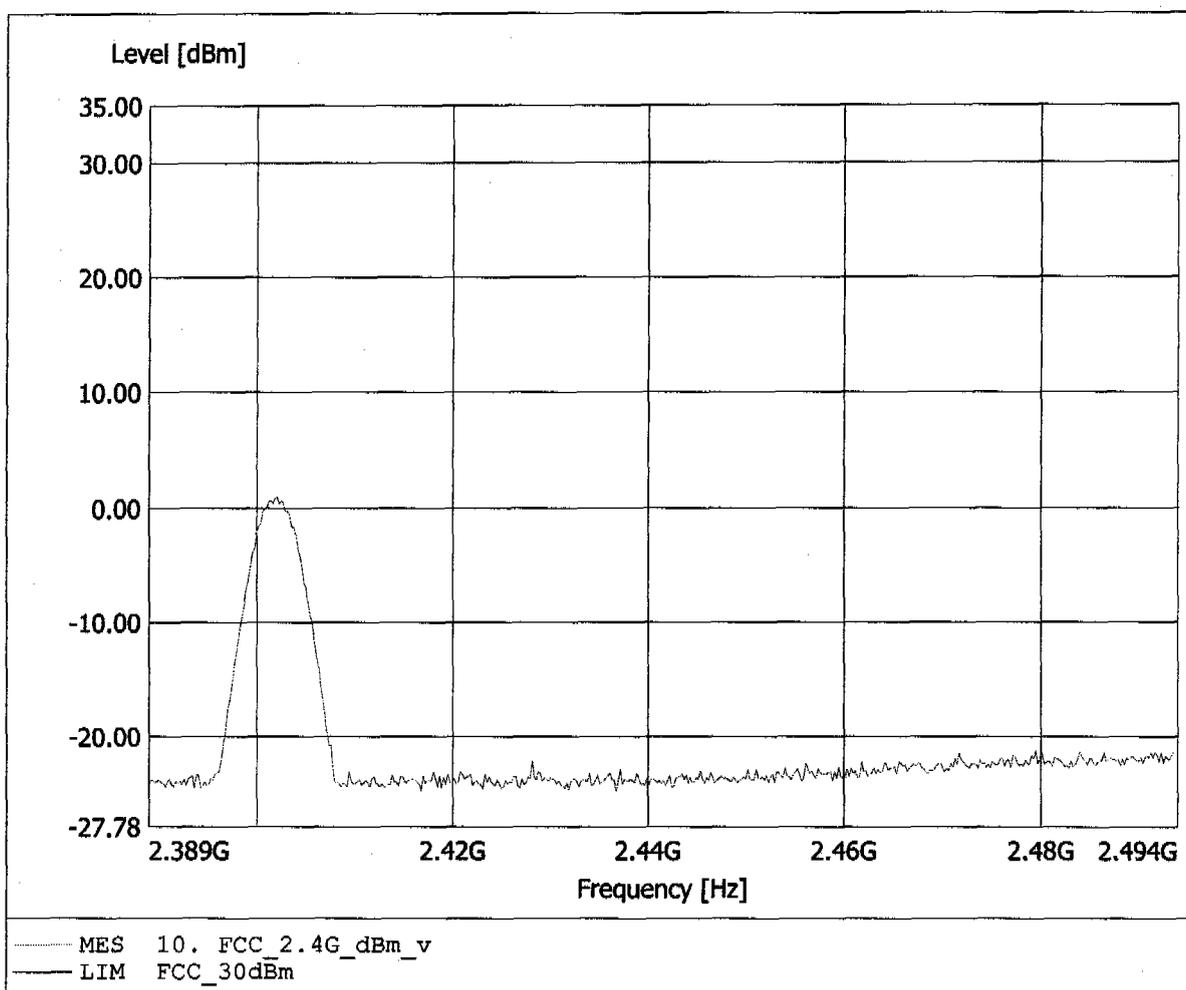


**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2441MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: BBHA9120D  
Comment 2: Freq: 2.441GHz, Pmax: 2.93dBm, RBW: 5MHz

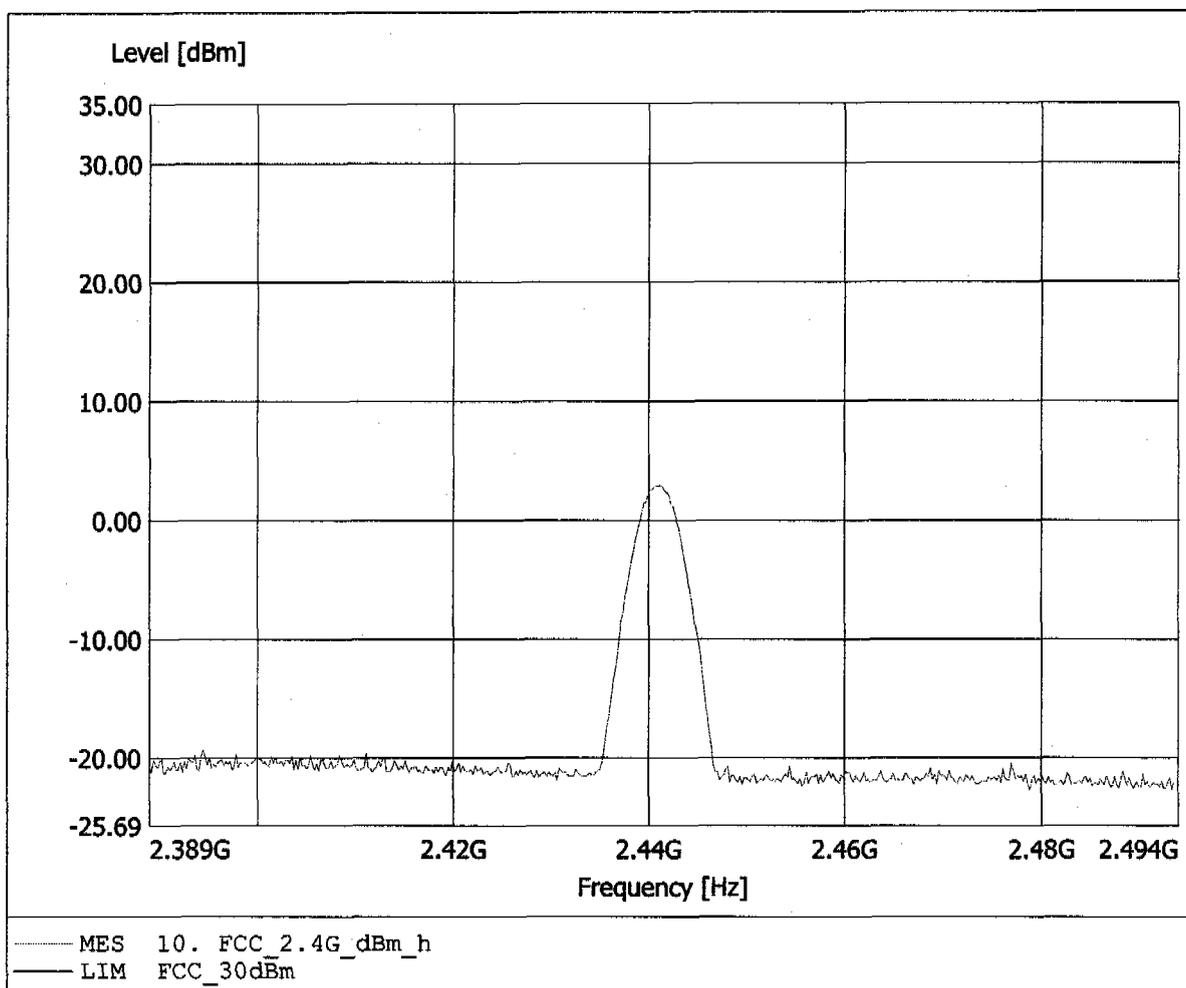


**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2441MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: BBHA9120D  
Comment 2: Freq: 2.441GHz, Pmax: -0.16dBm, RBW: 5MHz

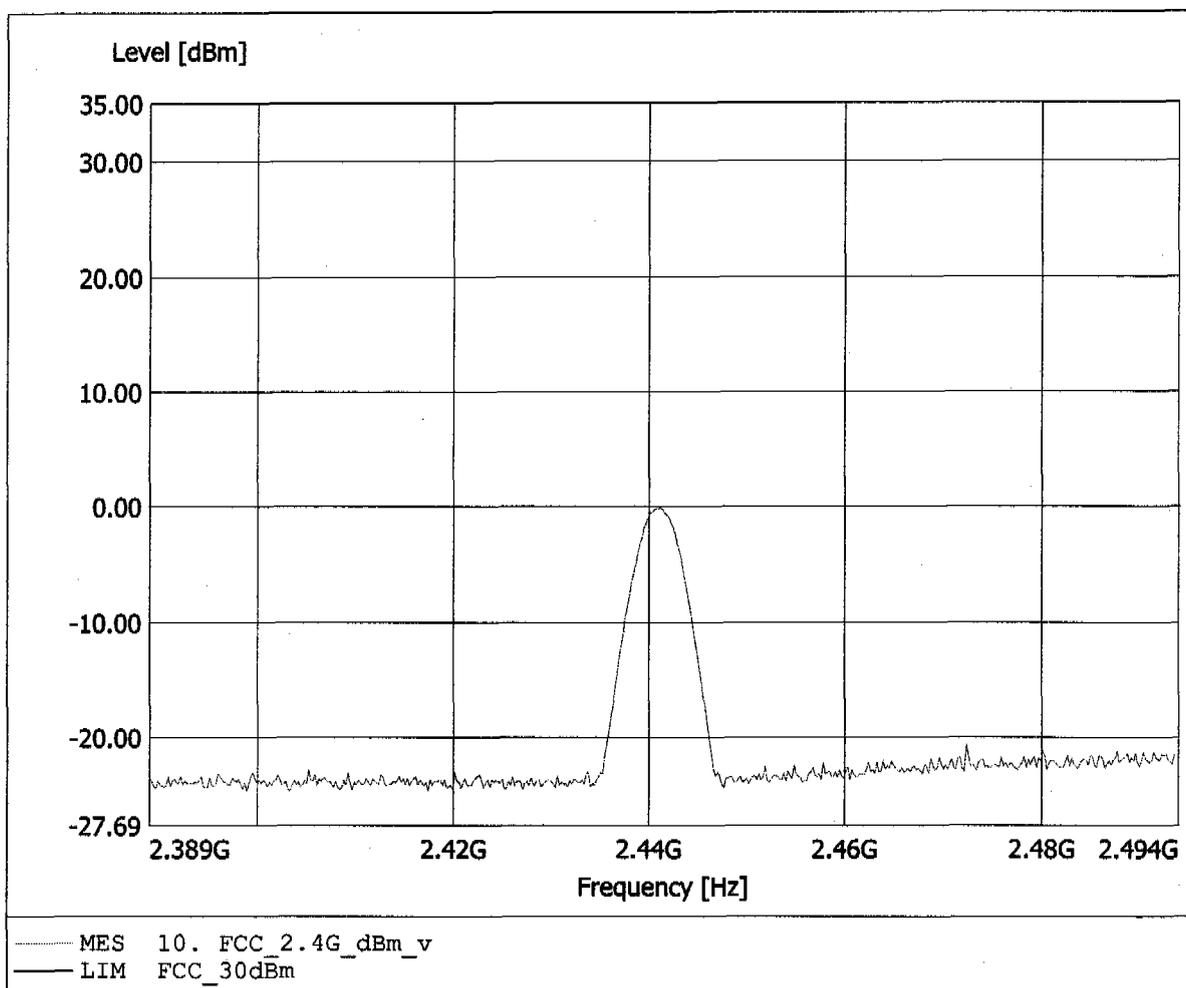


**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2480MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: BBHA9120D  
Comment 2: Freq: 2.480GHz, Pmax: 1.62dBm, RBW: 5MHz

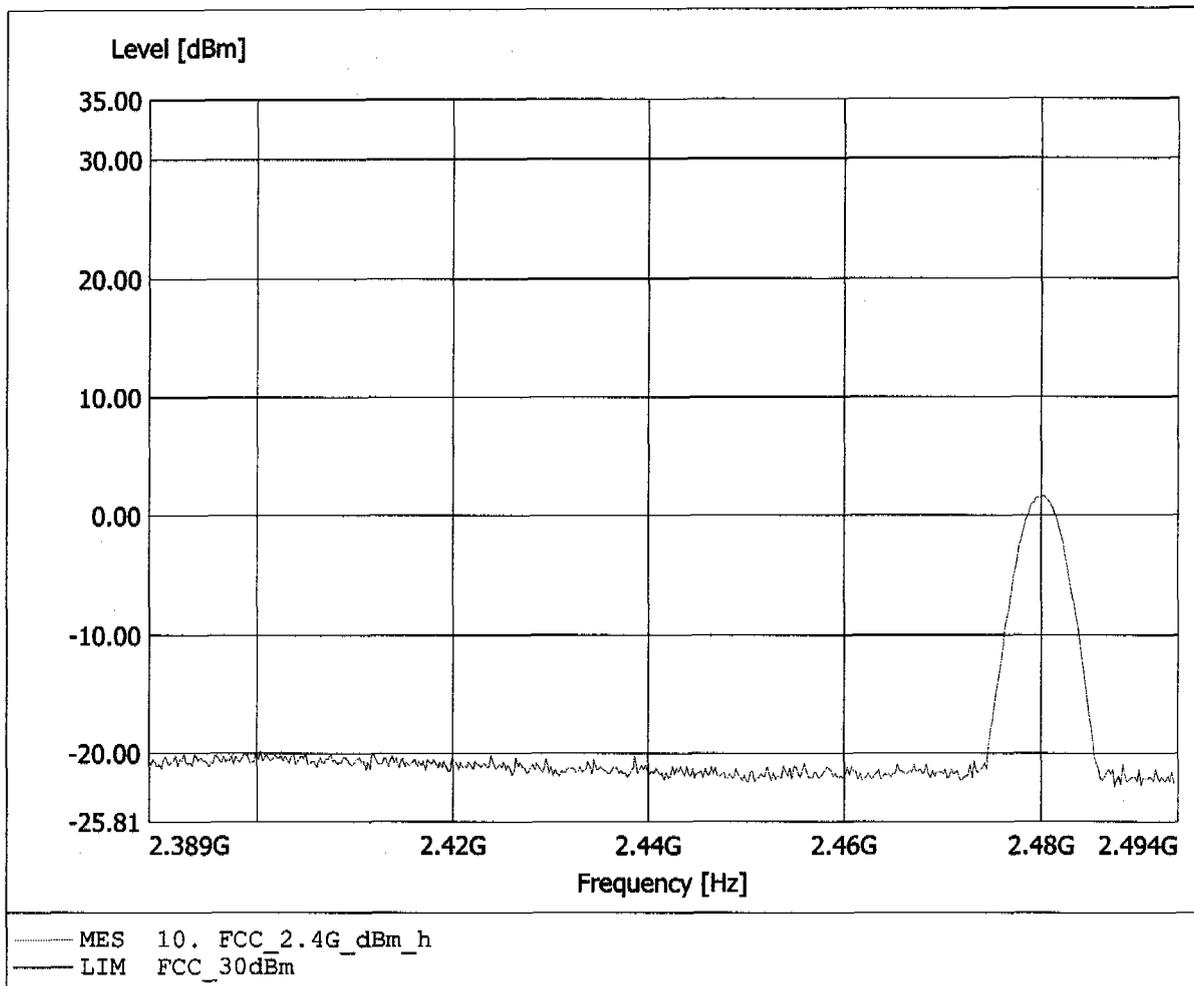

**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2480MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to S15.247  
Comment 1: Dist.: 3m, Ant.: BBHA9120D  
Comment 2: Freq: 2.480GHz, Pmax: -2.09dBm, RBW: 5MHz

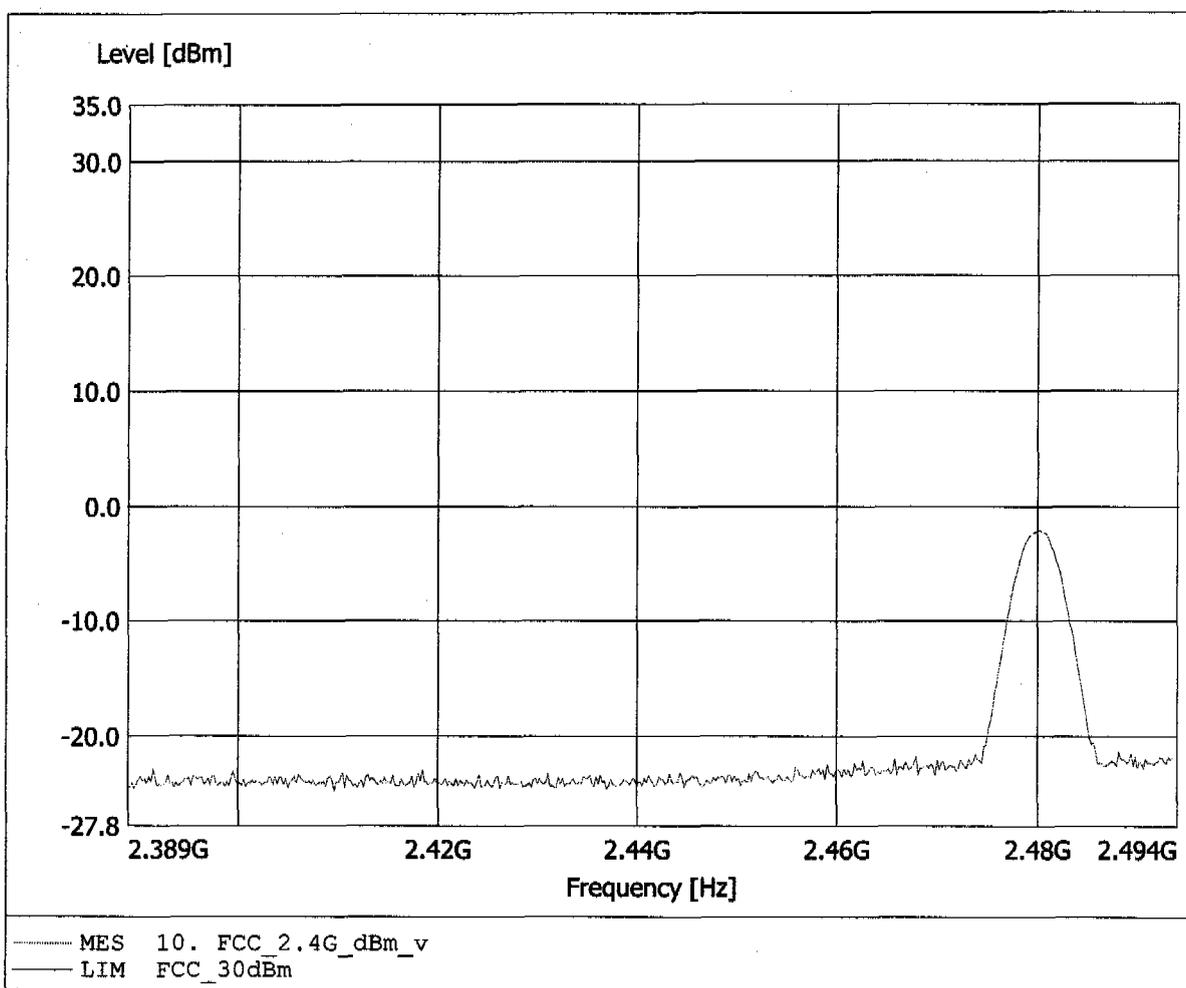




## Appendix C

Spurious Emissions radiated - Transmitter operating


**Carrier power (Field Strength)**  
**FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2480MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: BBHA9120D  
Comment 2: Freq: 2.480GHz, Emax: 90.17dBµV/m, RBW: 100kHz

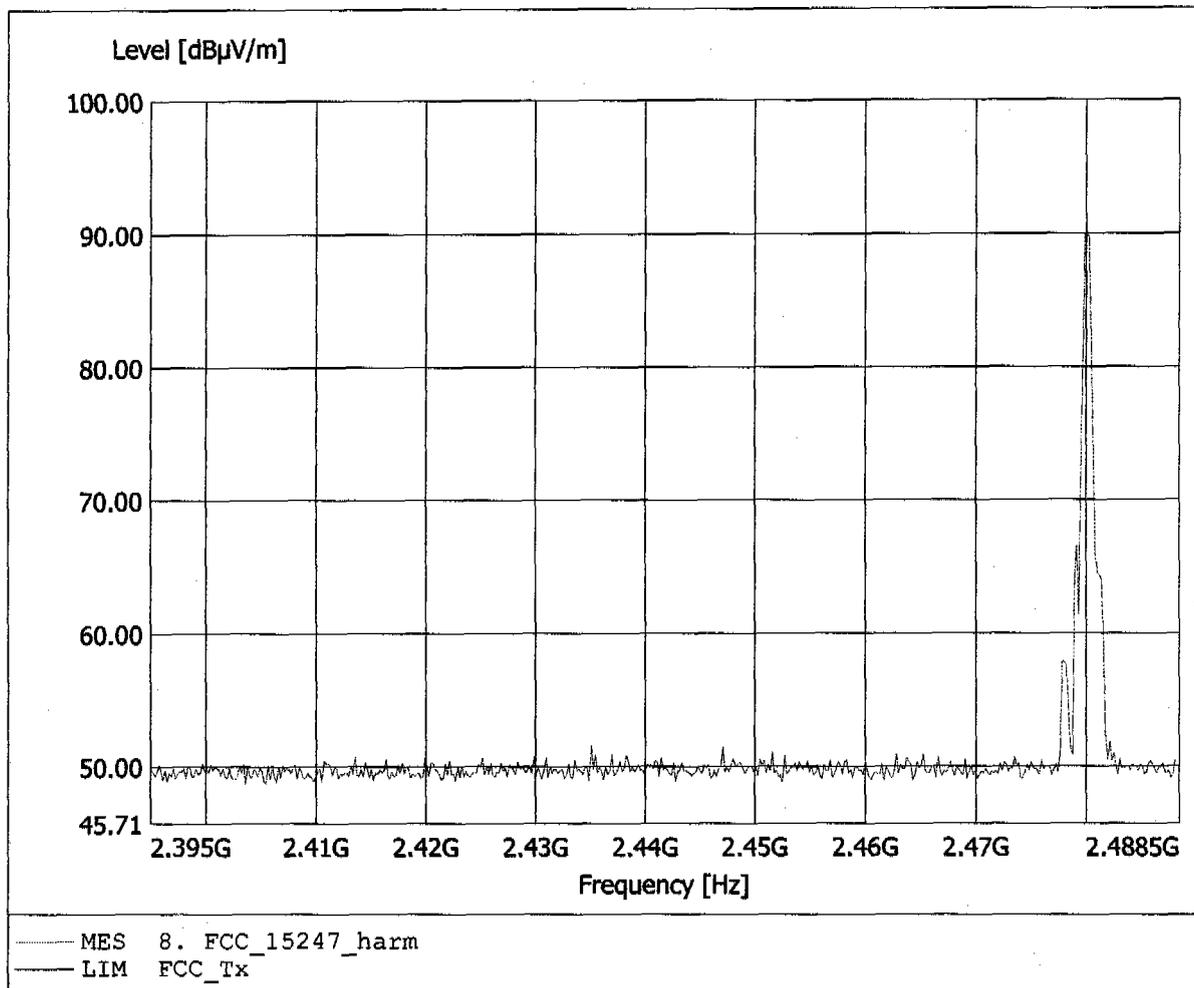


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2480MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 193.186MHz, Emax: 32.96dBµV/m, RBW: 100kHz

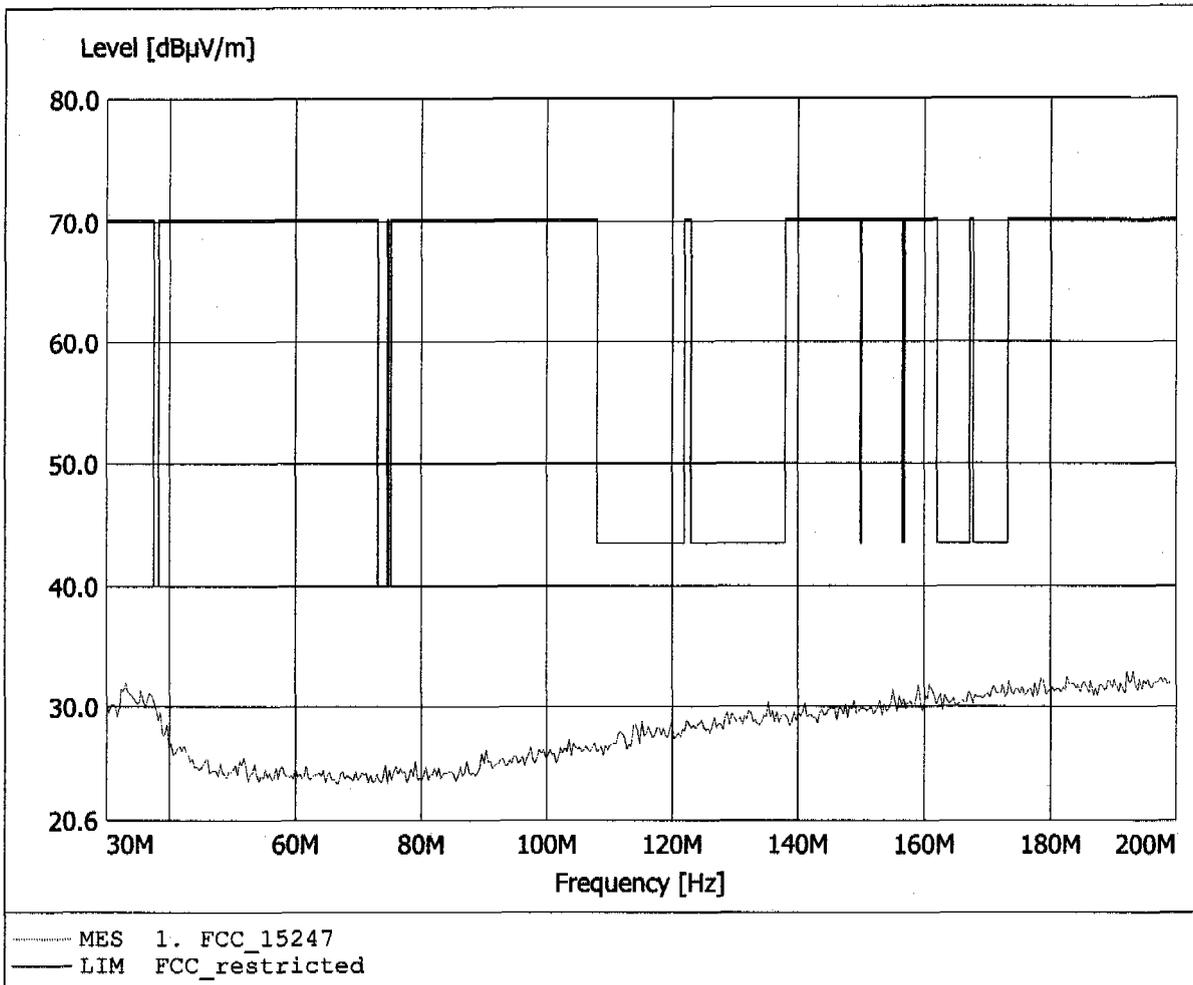


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2480MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 33.066MHz, Emax: 36.36dBµV/m, RBW: 100kHz

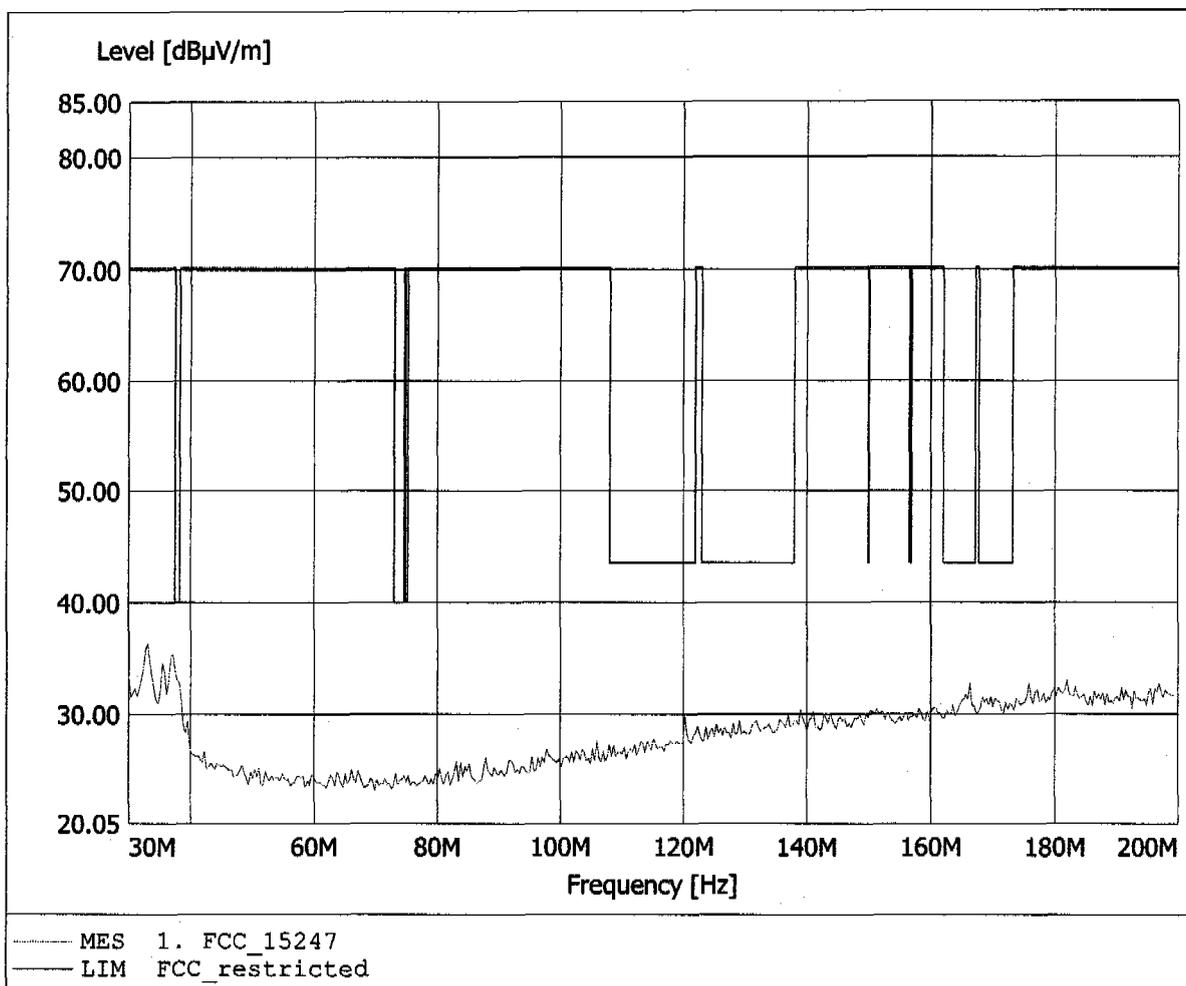


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2480MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Comment 2: Freq: 432.465MHz, Emax: 32.57dBµV/m, RBW: 100kHz

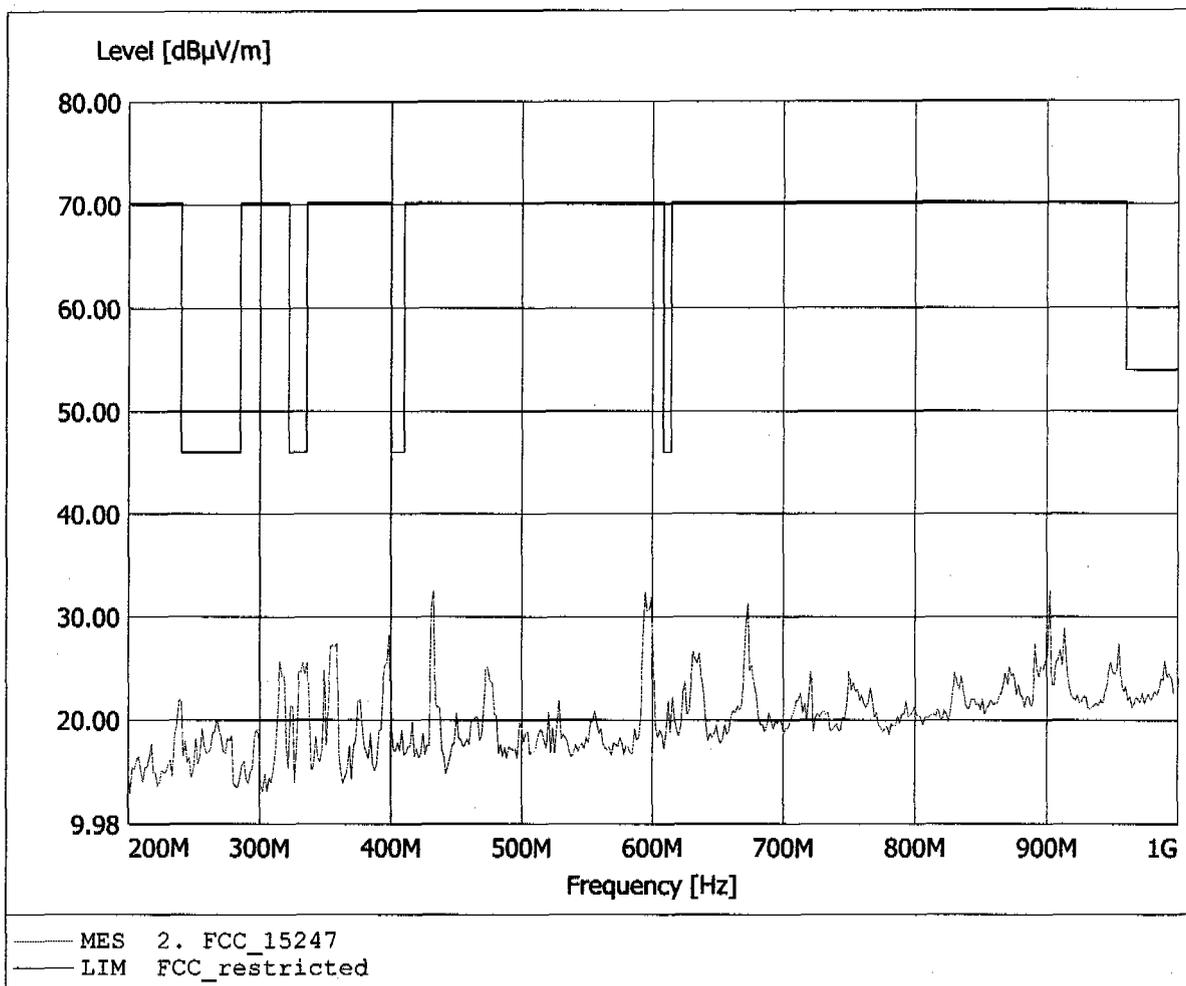


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2480MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Comment 2: Freq: 432.465MHz, Emax: 35.09dBµV/m, RBW: 100kHz

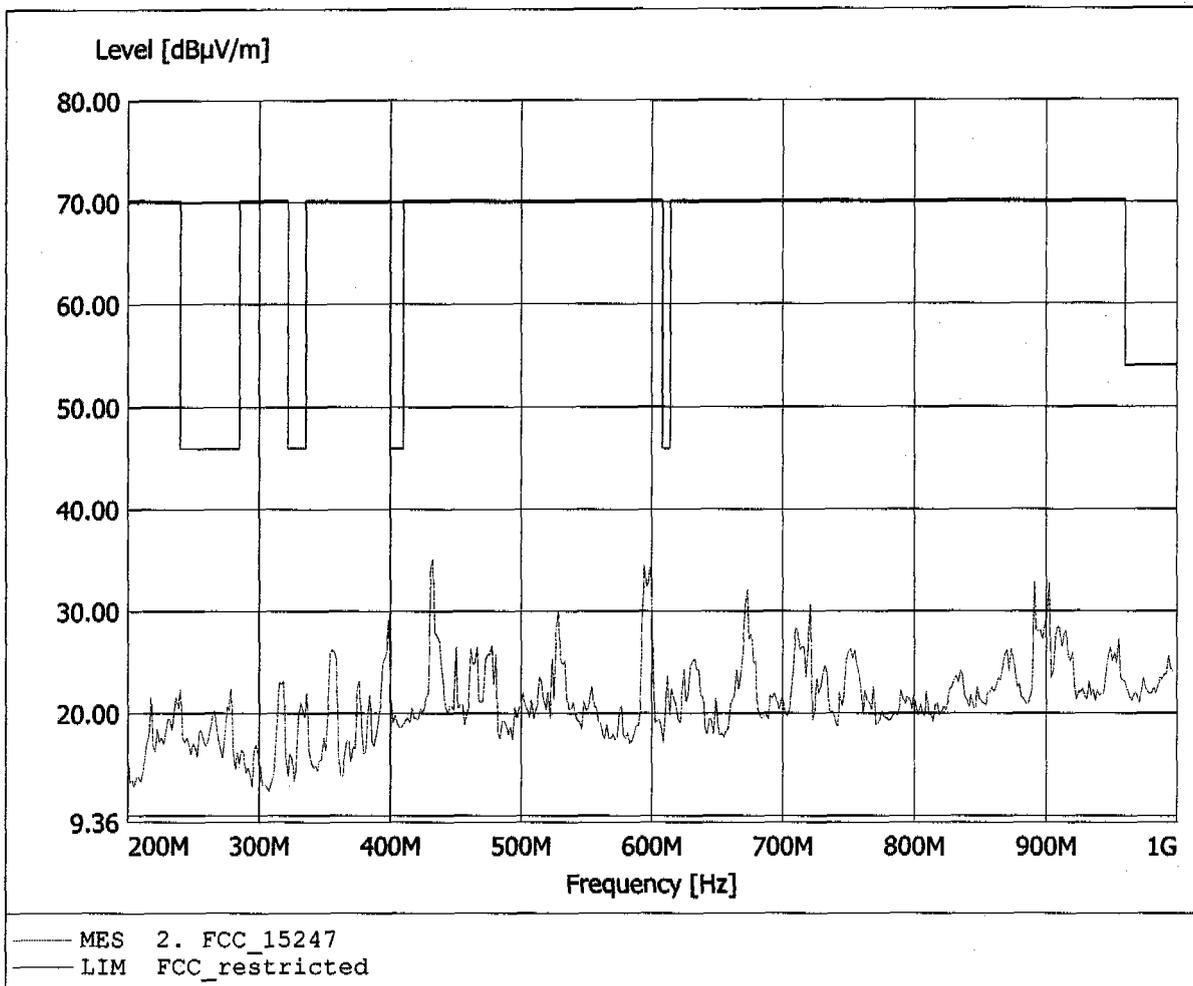


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2480MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.  
Comment 2: Freq: 2.484GHz, Emax: 44.06dBµV/m, RBW: 1MHz

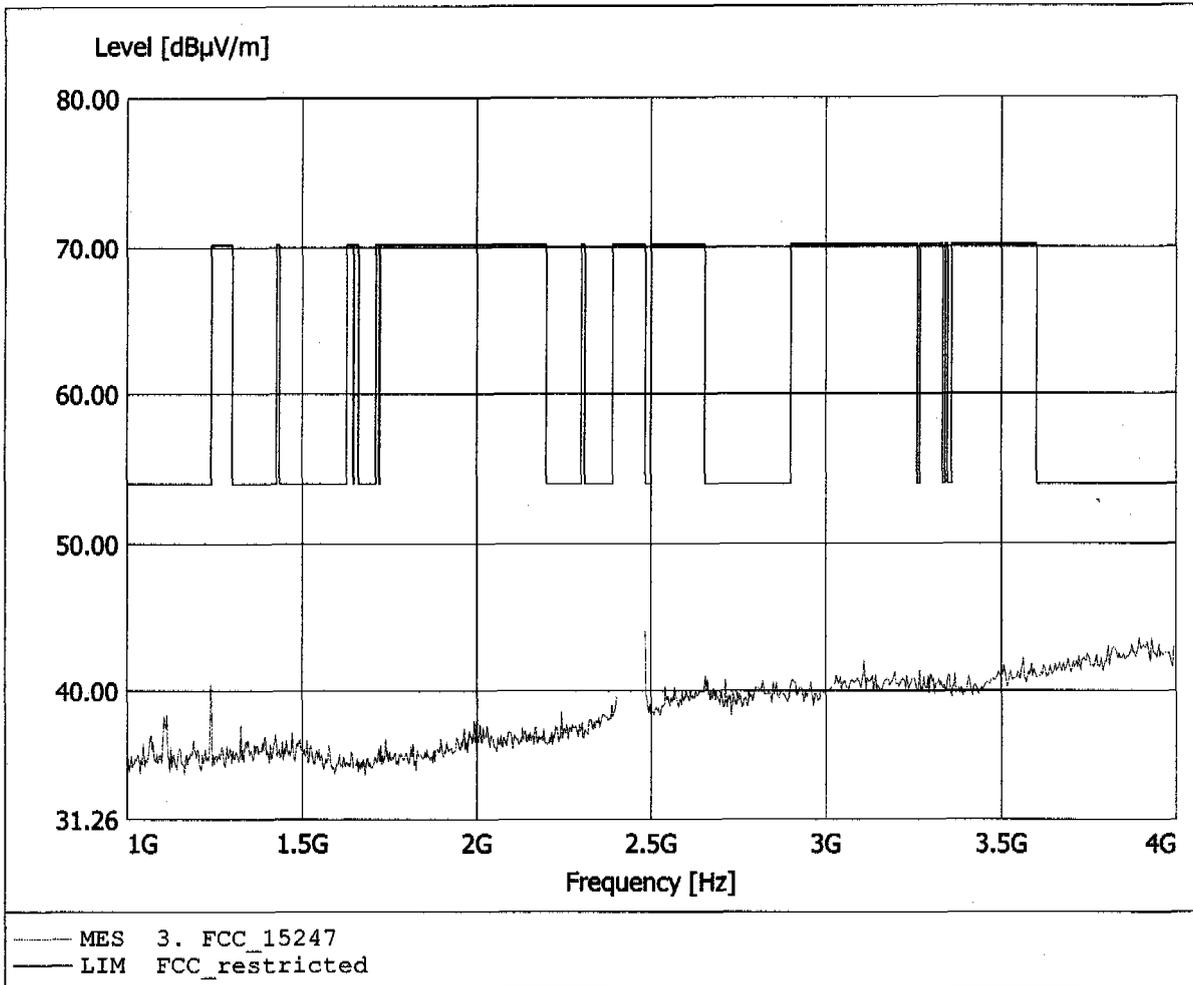


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2480MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.  
Comment 2: Freq: 3.967GHz, Emax: 44.07dBµV/m, RBW: 1MHz

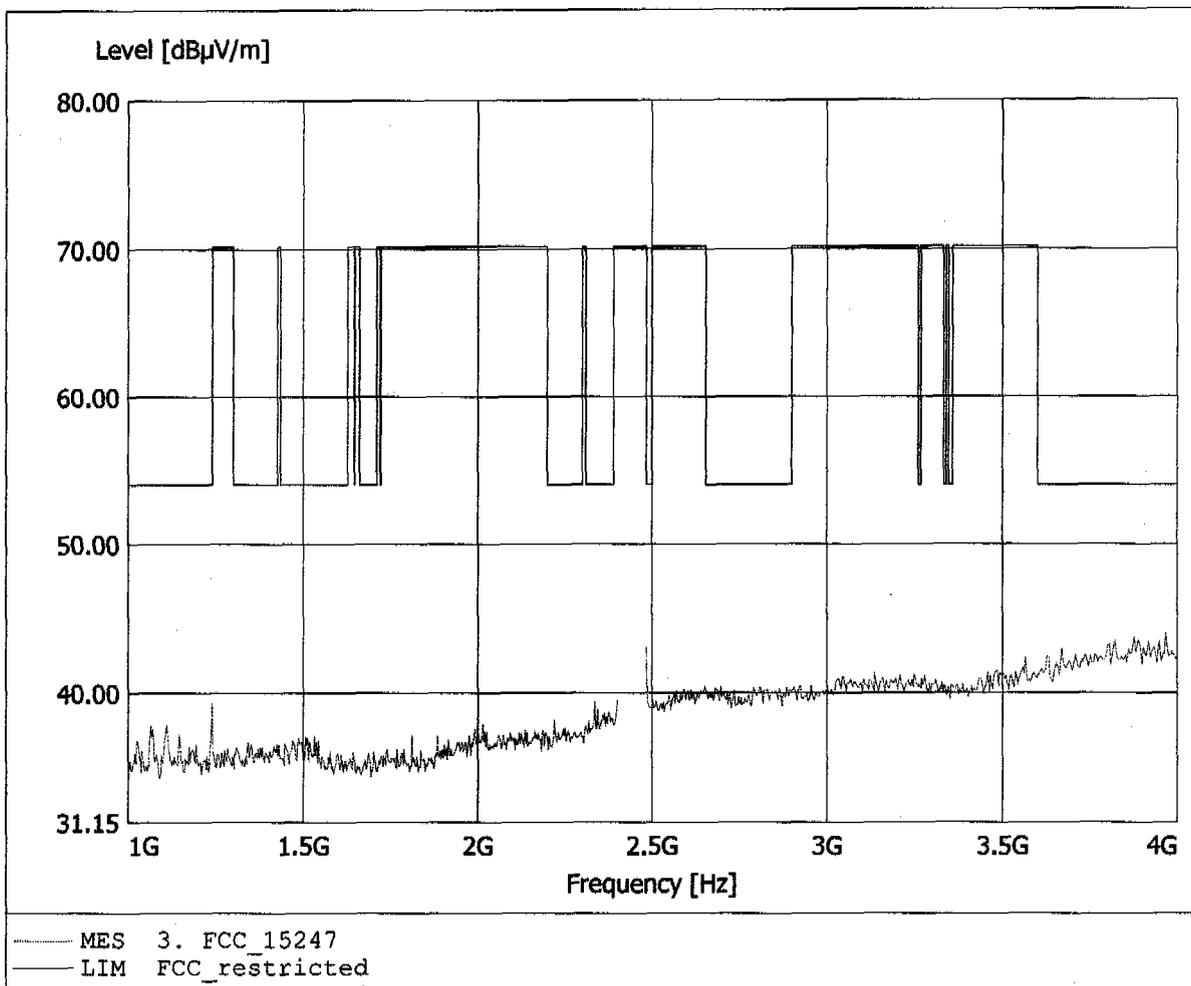


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2480 MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 7.944GHz, Emax: 38.43dBµV/m, RBW: 1MHz

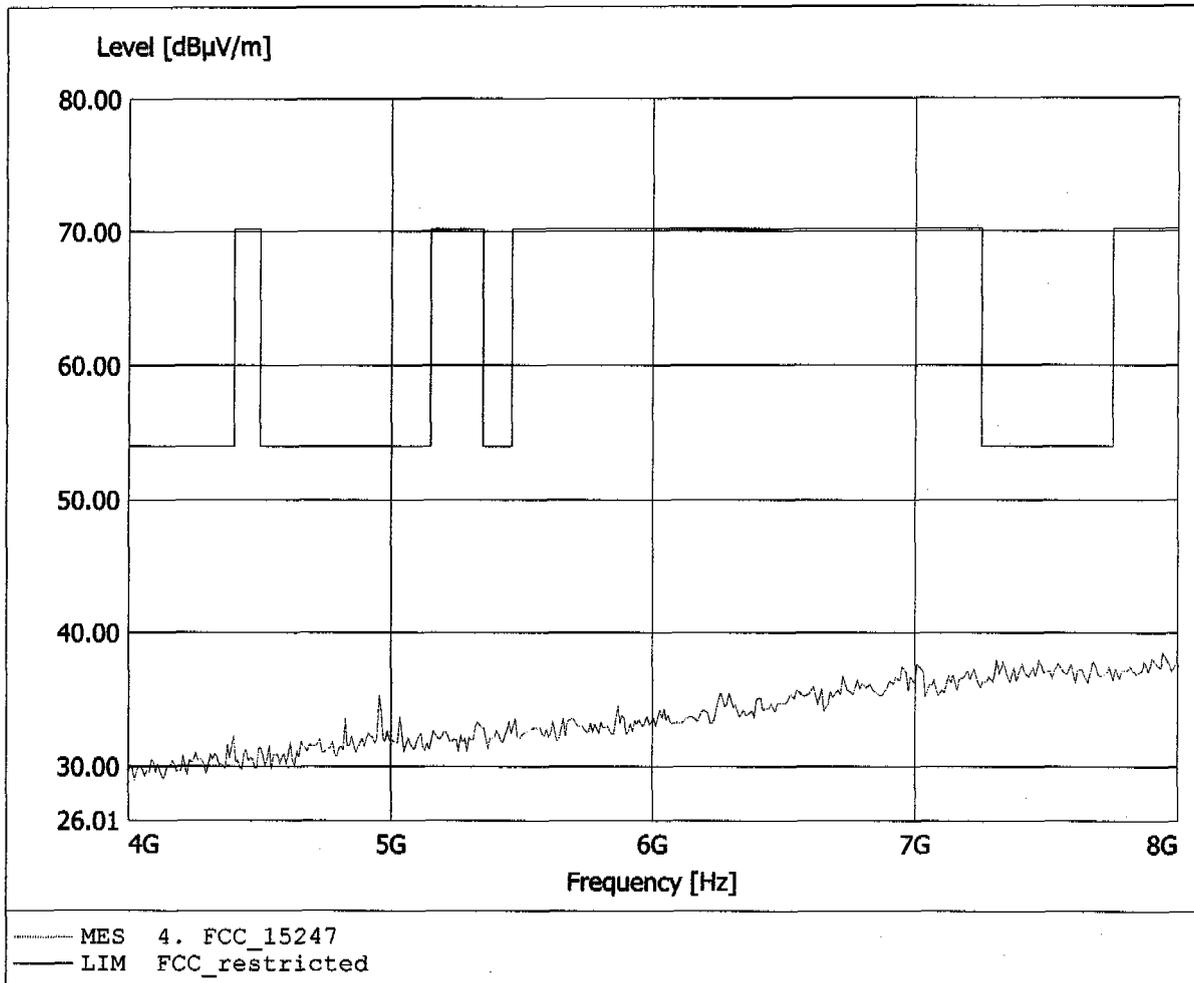


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2480 MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 7.872GHz, Emax: 39.53dBµV/m, RBW: 1MHz

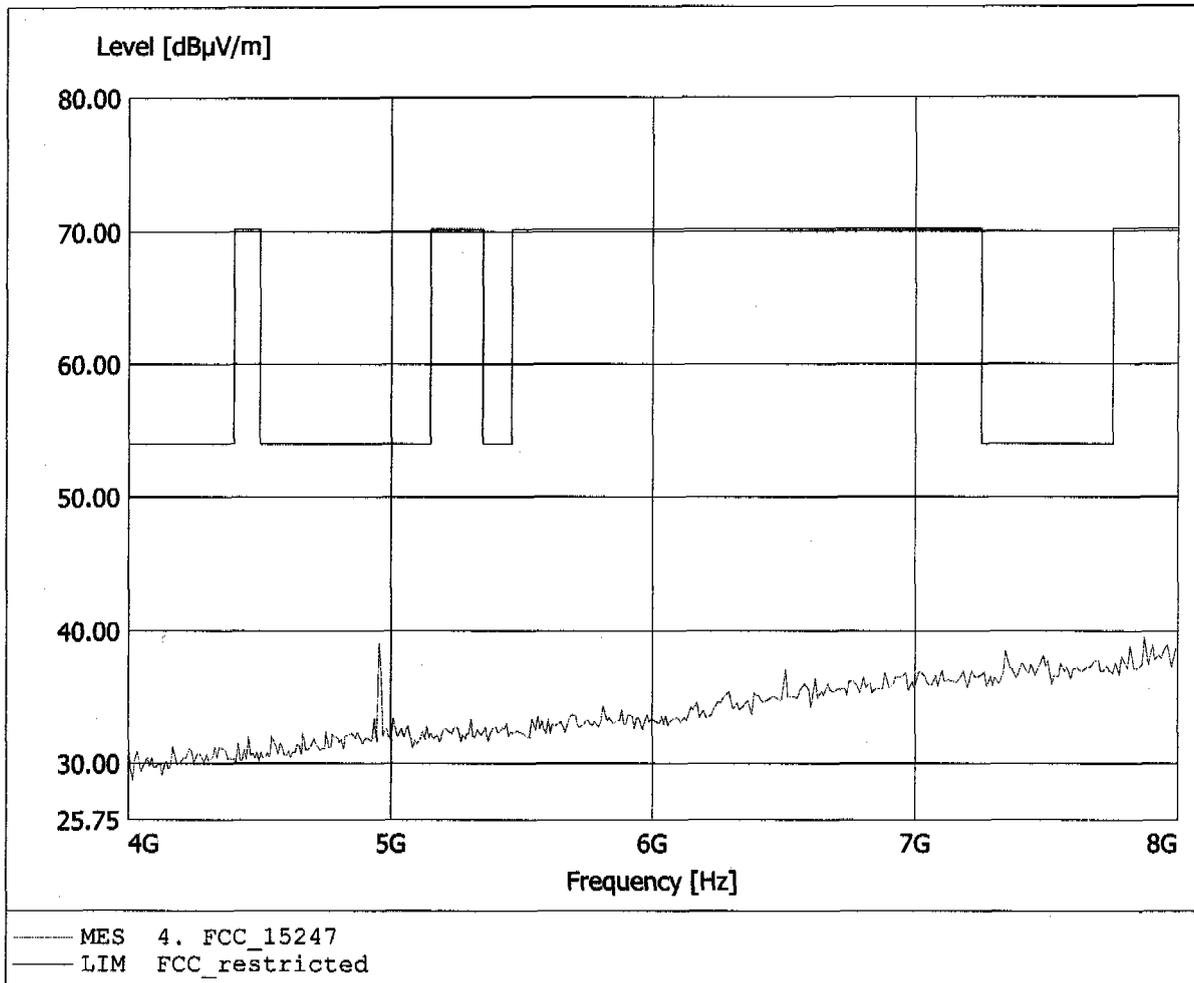


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2480 MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to S15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 9.924GHz, Emax: 43.53dBµV/m, RBW: 1MHz

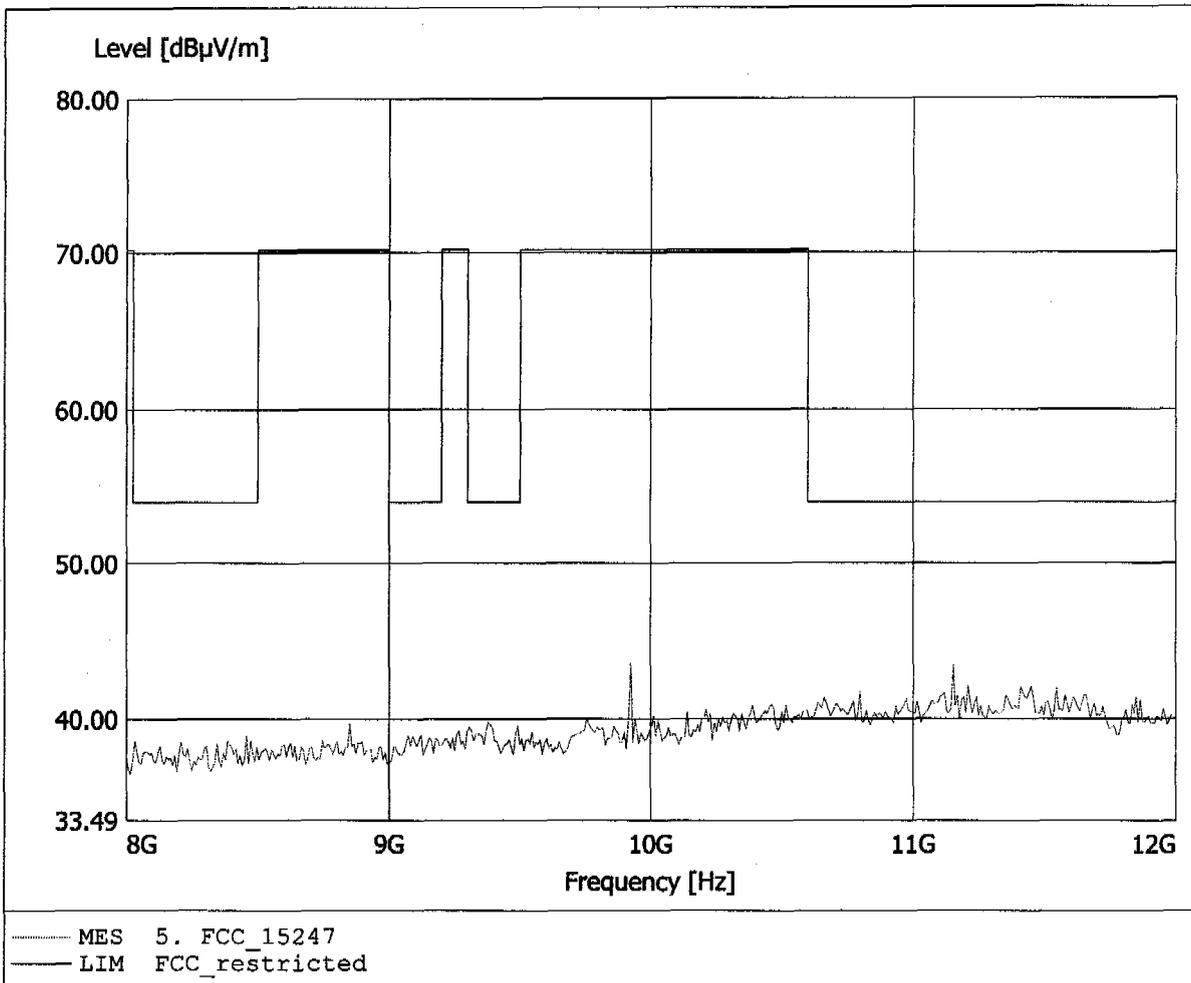


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2480 MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 11.367GHz, Emax: 42.20dBµV/m, RBW: 1MHz

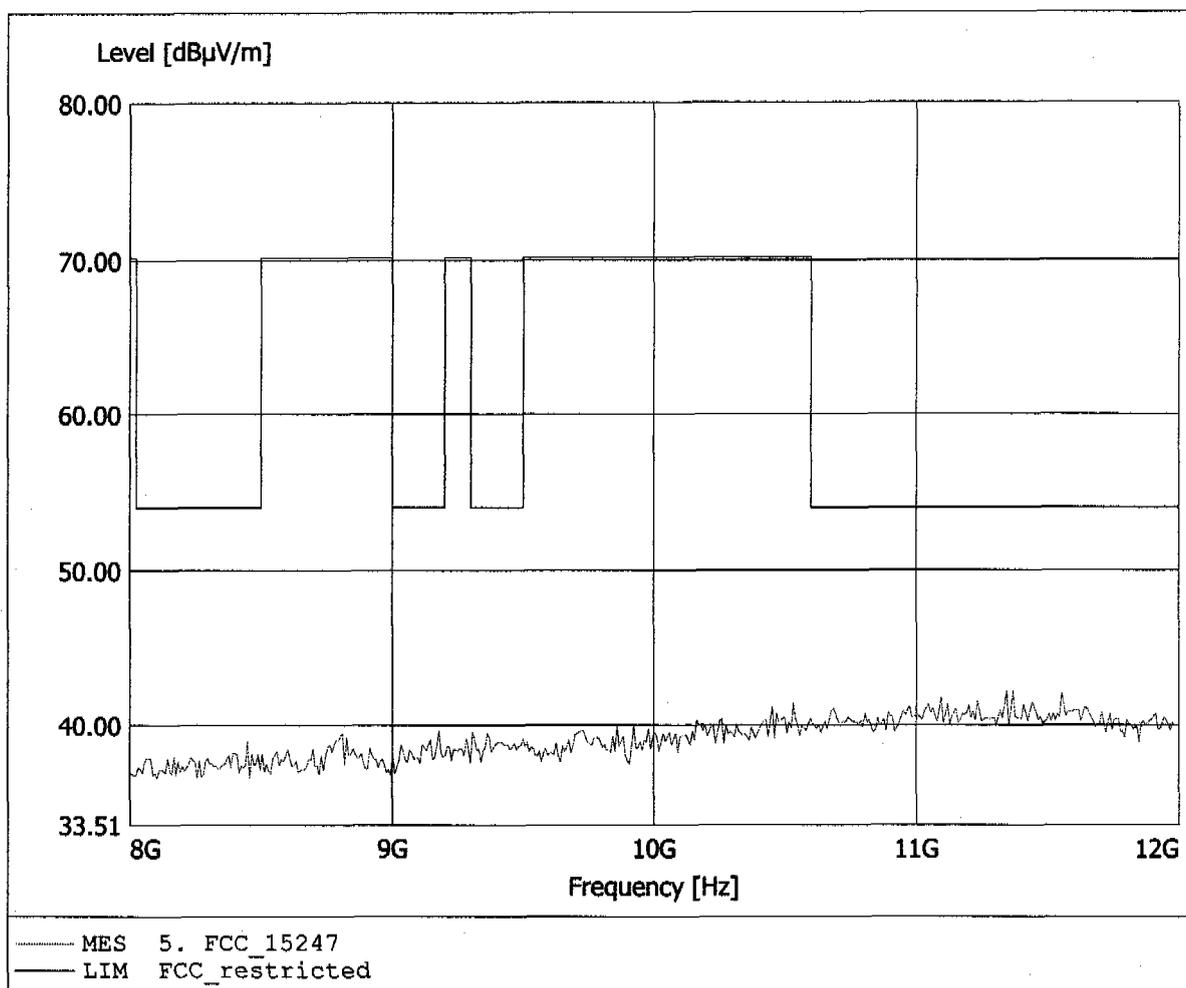


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2480 MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 14.255GHz, Emax: 44.61dBµV/m, RBW: 1MHz

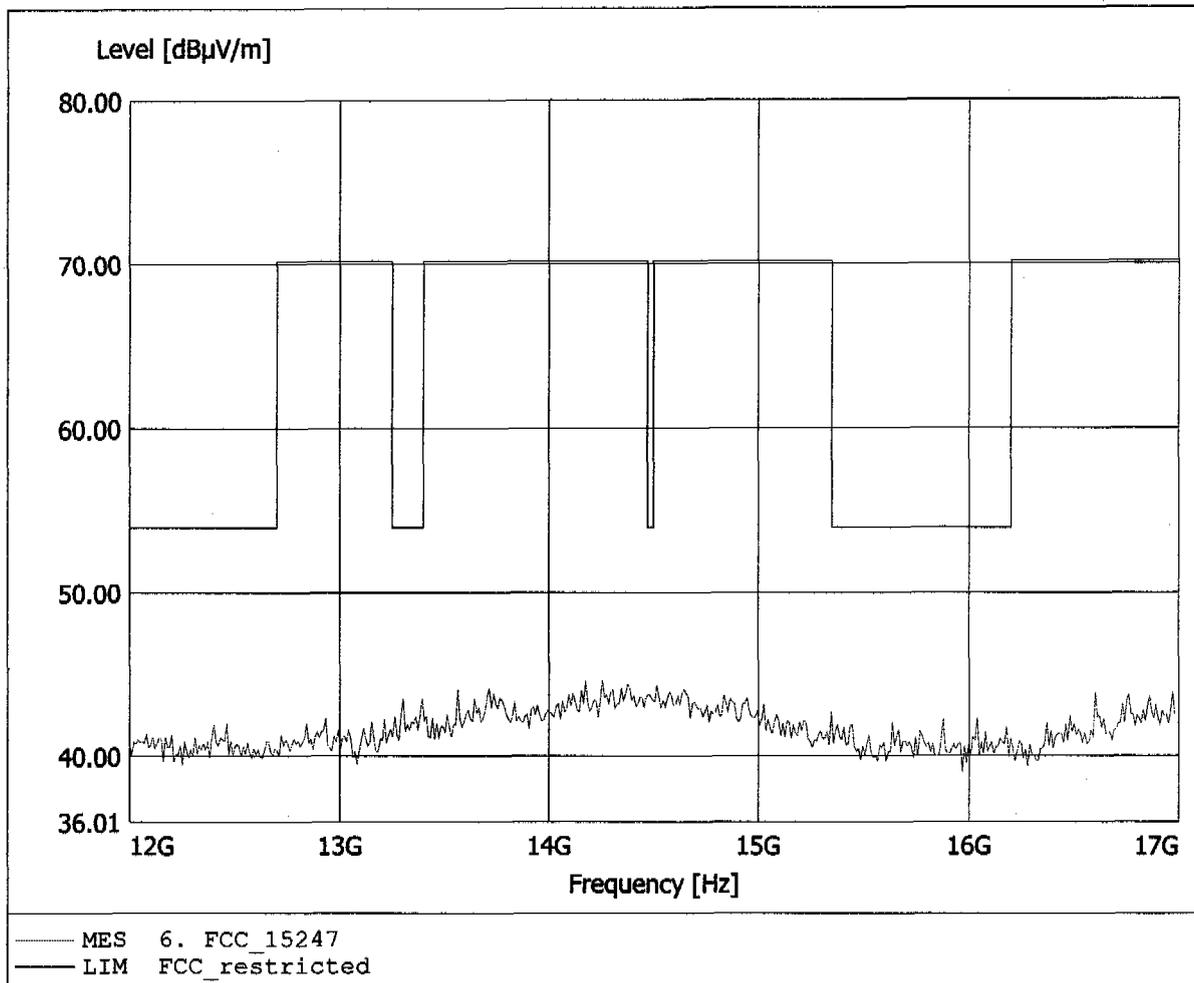


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2480 MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 14.495GHz, Emax: 44.89dBµV/m, RBW: 1MHz

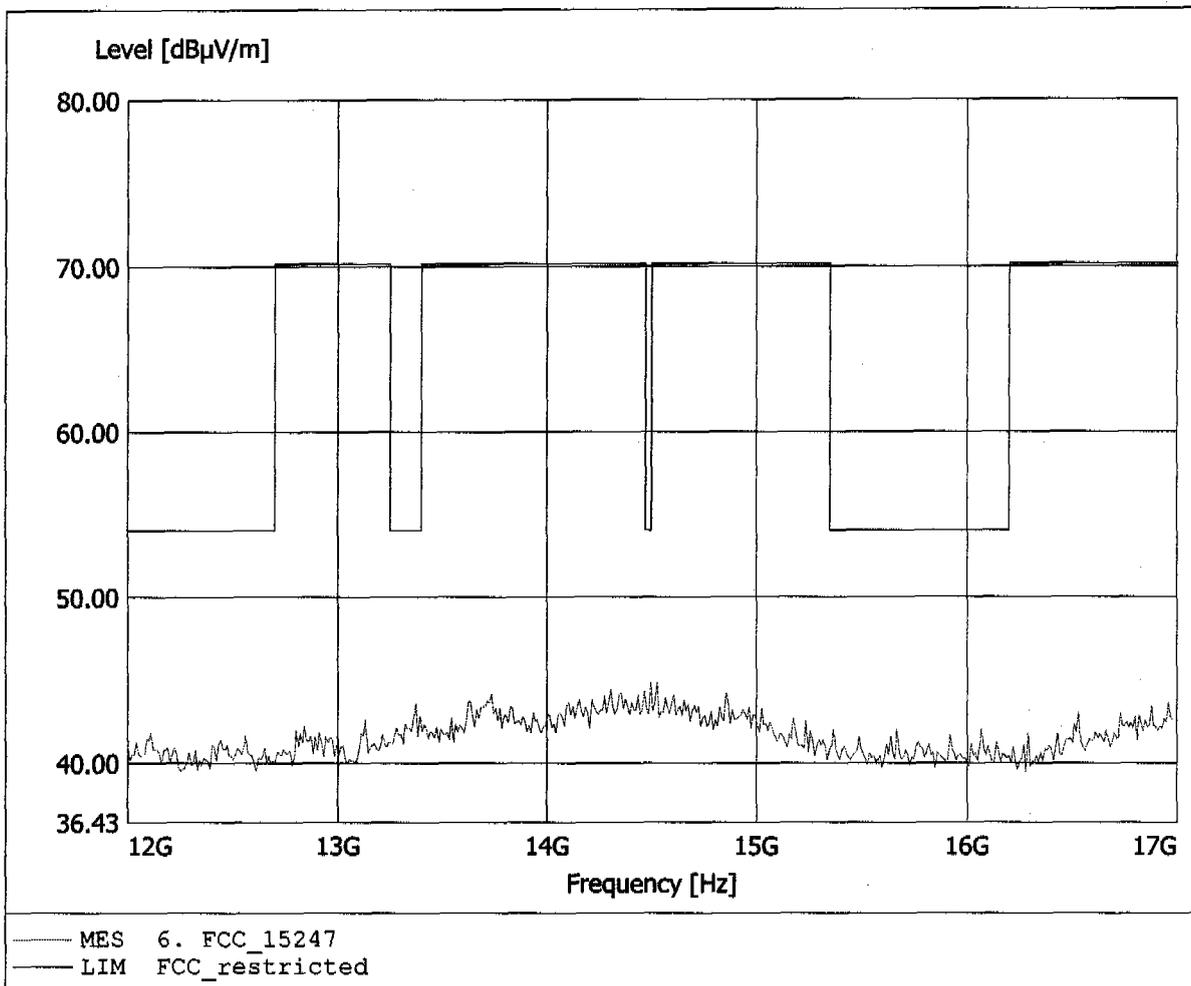


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2480 MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 17.019GHz, Emax: 45.12dBµV/m, RBW: 1MHz

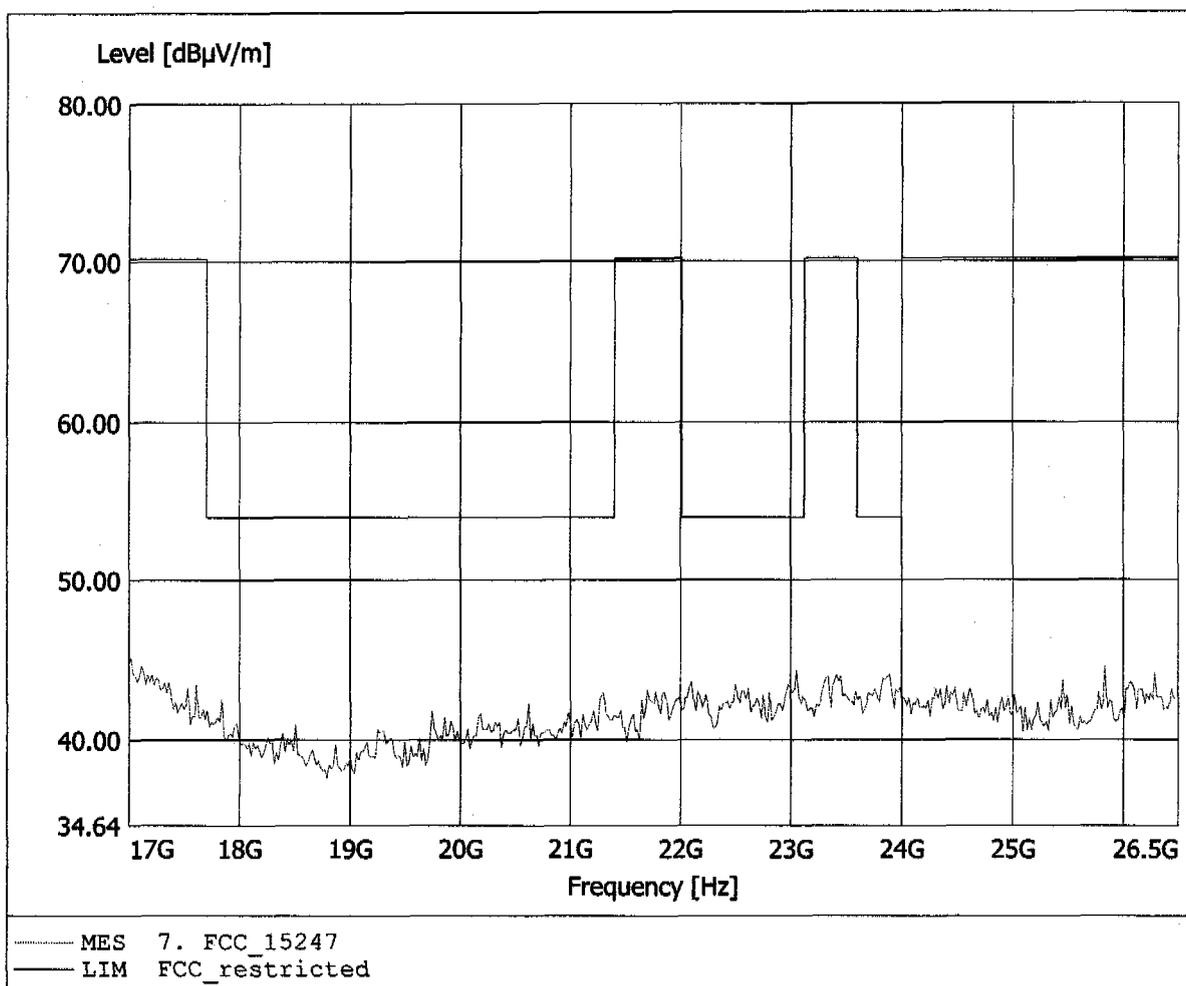


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2480 MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to S15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 17.019GHz, Emax: 45.31dBµV/m, RBW: 1MHz

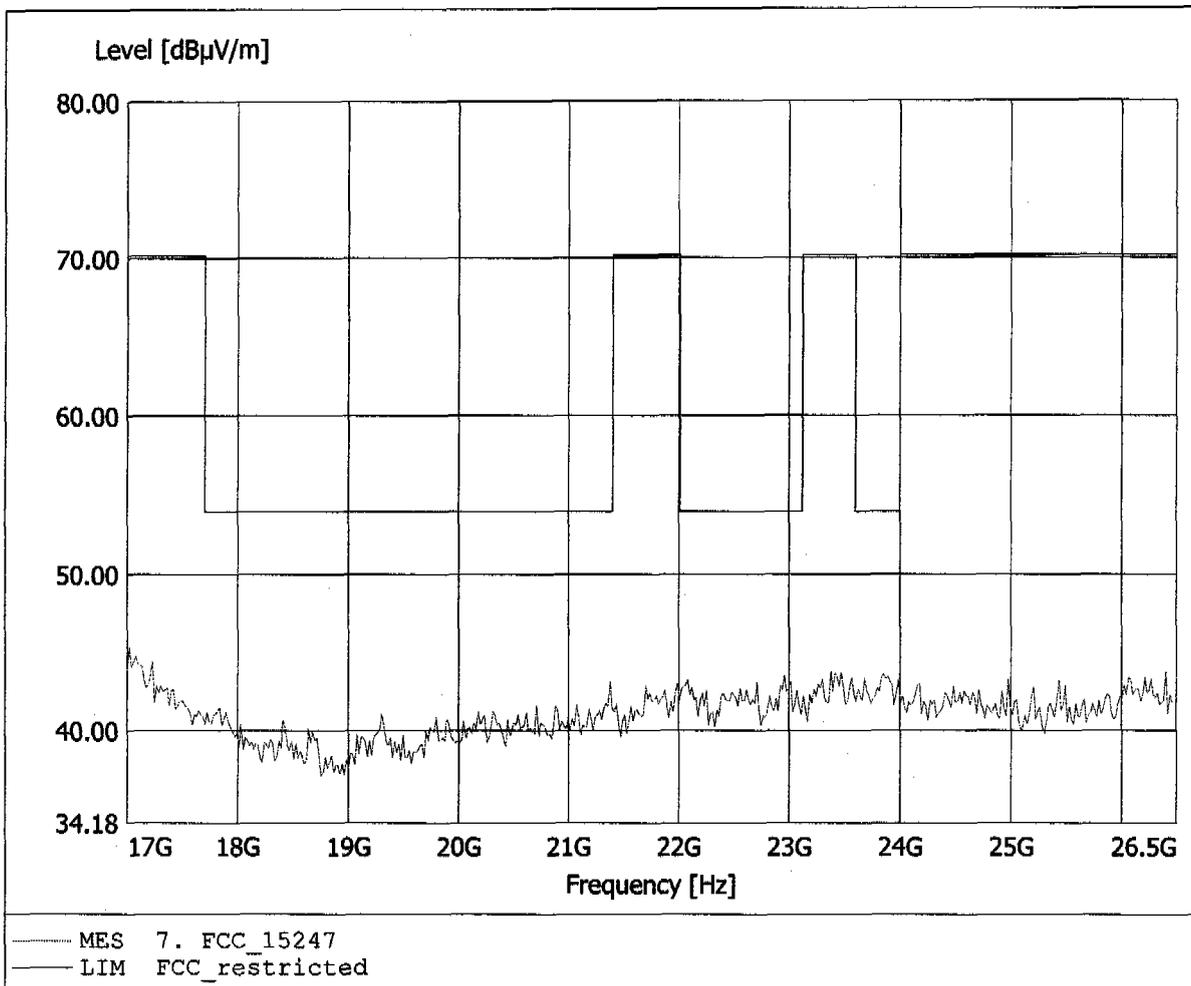


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2441MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 199.319MHz, Emax: 32.97dBµV/m, RBW: 100kHz

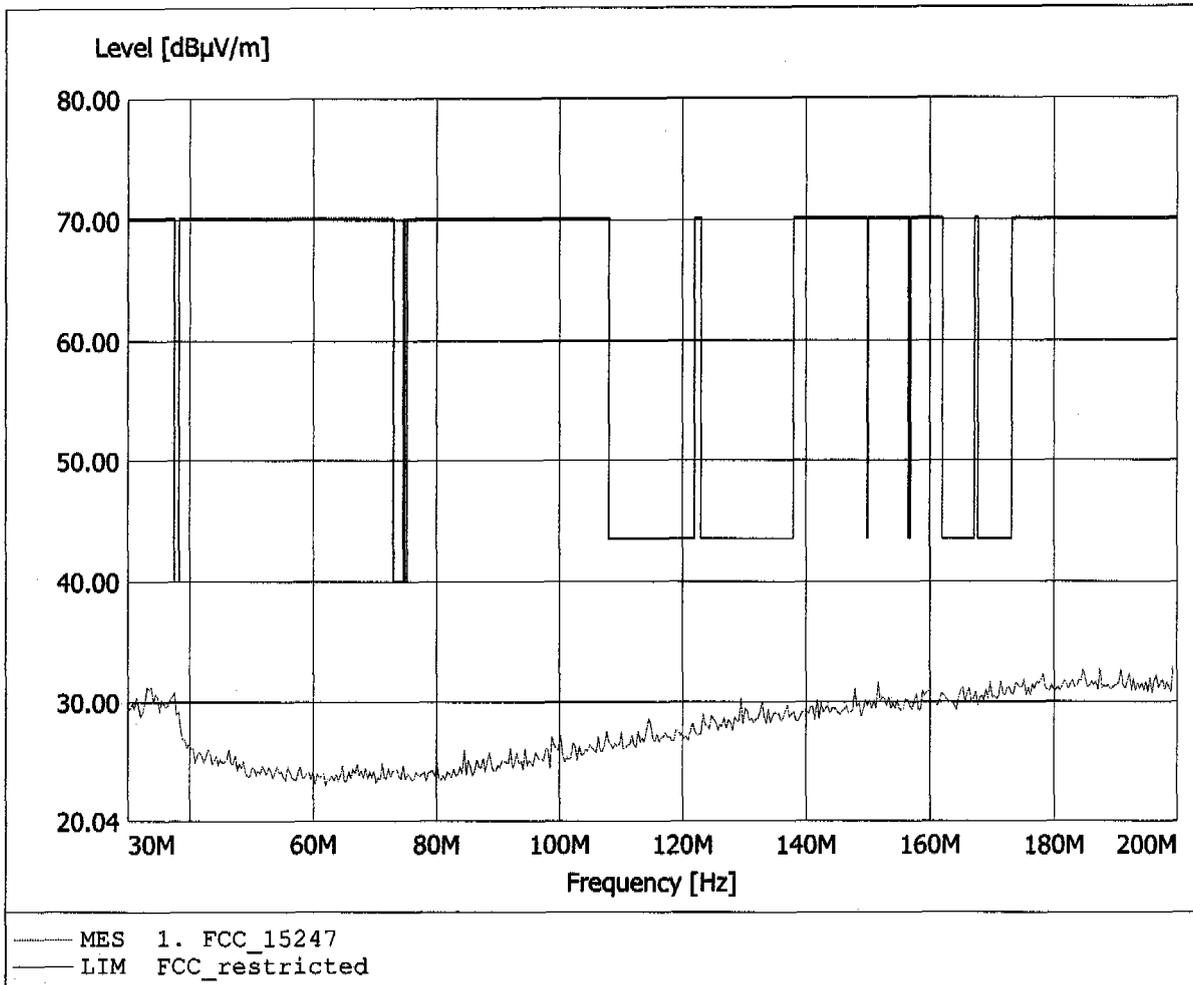


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2441MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 33.066MHz, Emax: 35.95dBµV/m, RBW: 100kHz

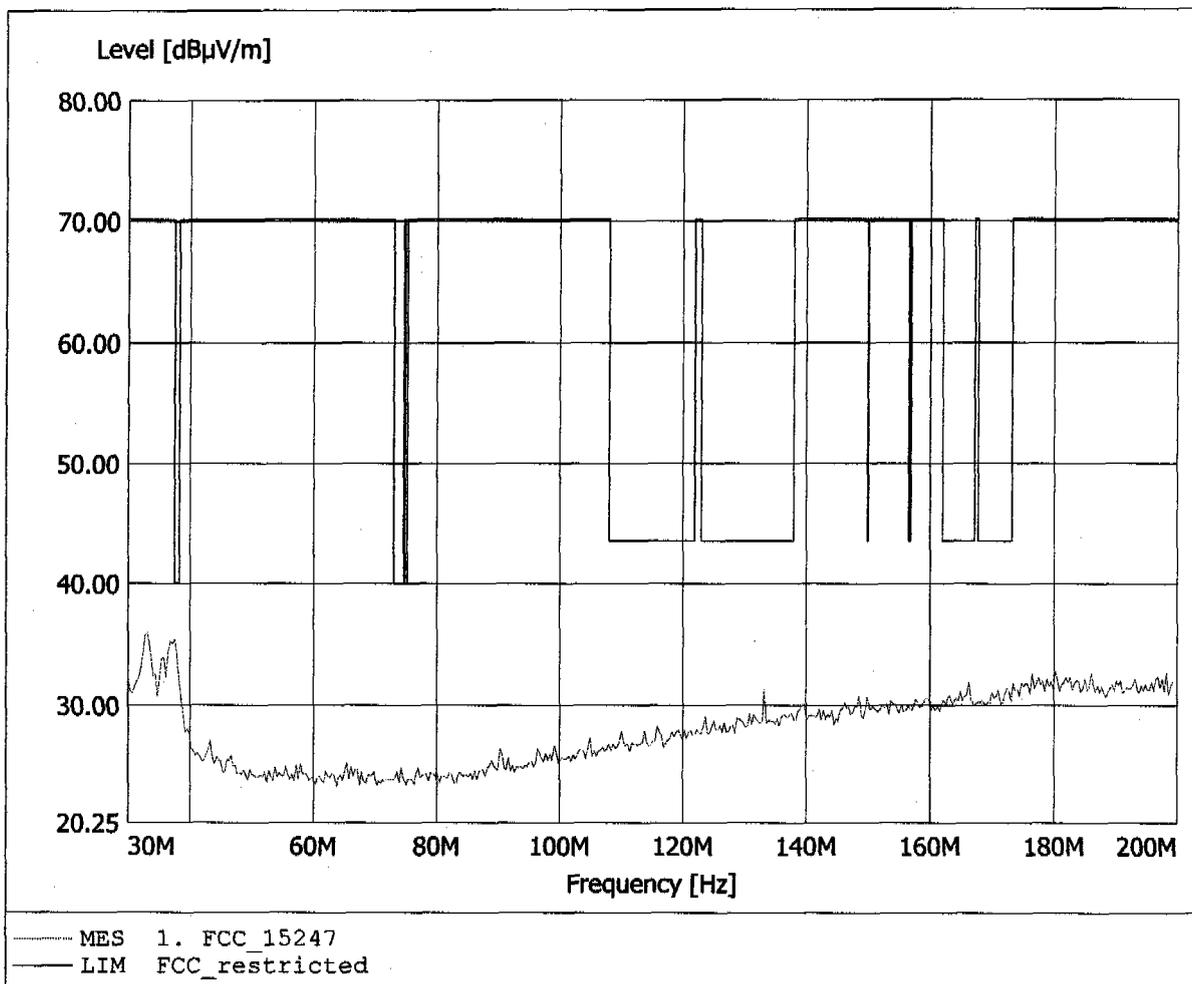


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2441MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Comment 2: Freq: 432.465MHz, Emax: 32.70dBµV/m, RBW: 100kHz

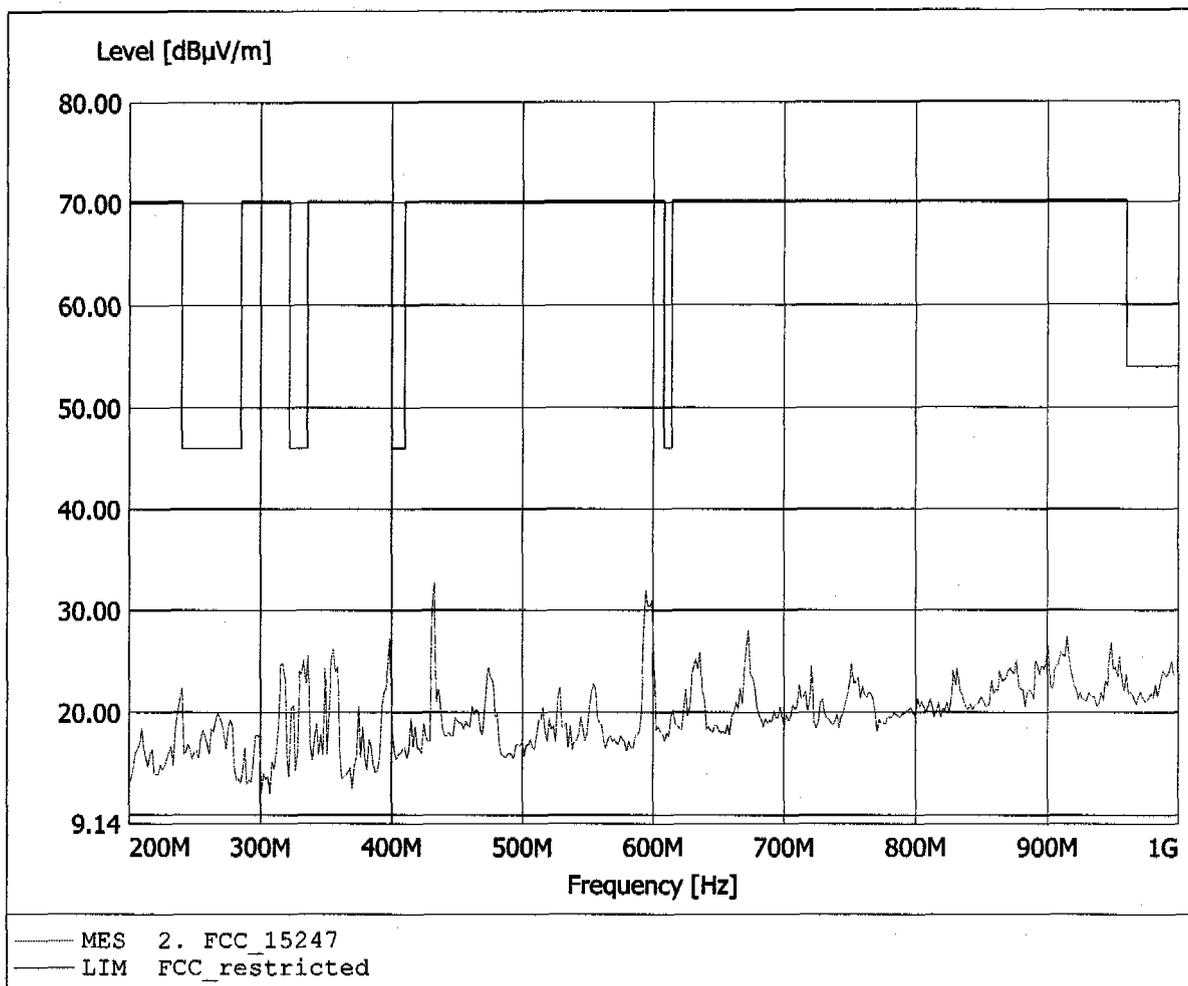


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2441MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Comment 2: Freq: 594.389MHz, Emax: 35.34dBµV/m, RBW: 100kHz

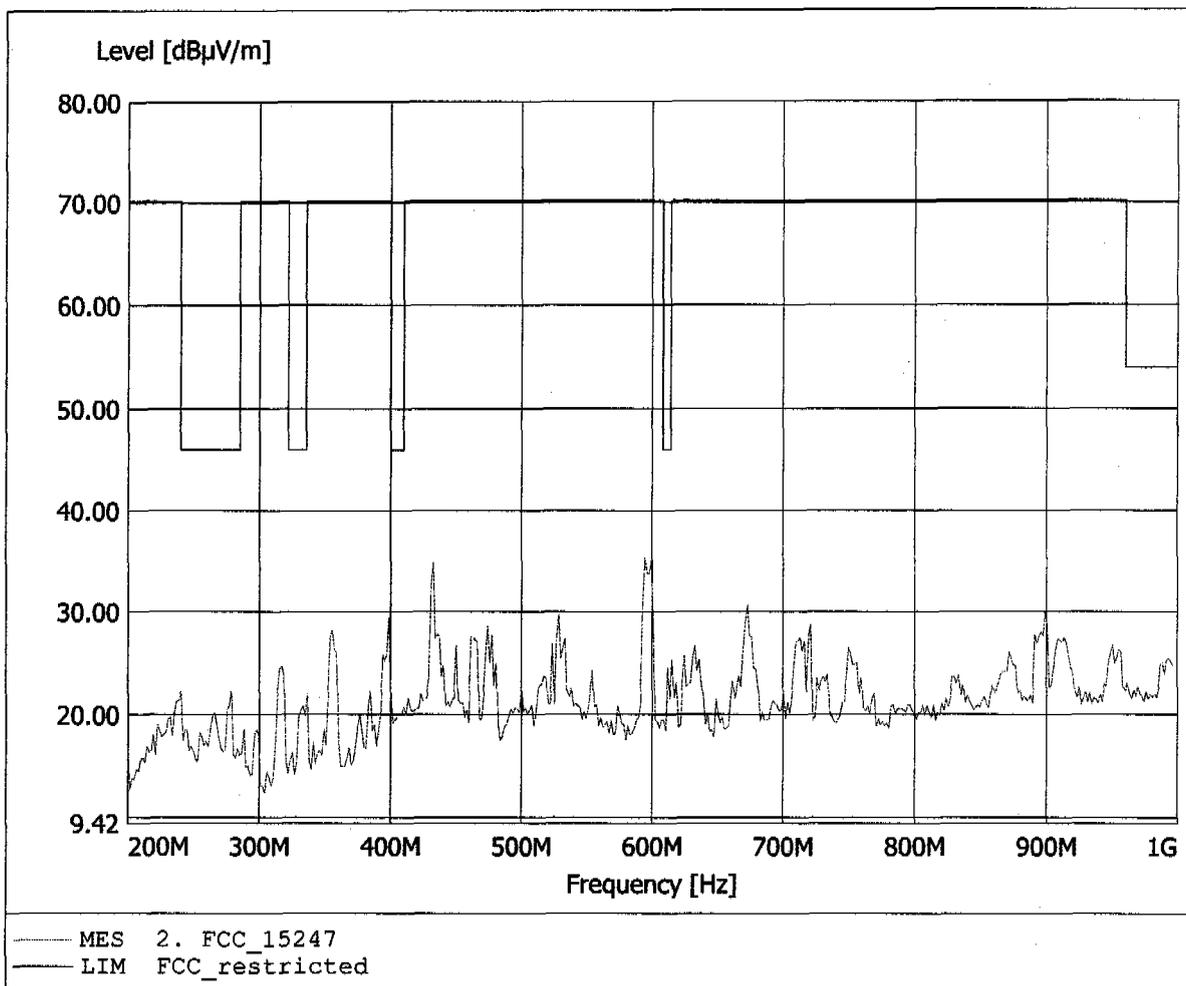


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2441MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.  
Comment 2: Freq: 3.854GHz, Emax: 43.85dBµV/m, RBW: 1MHz

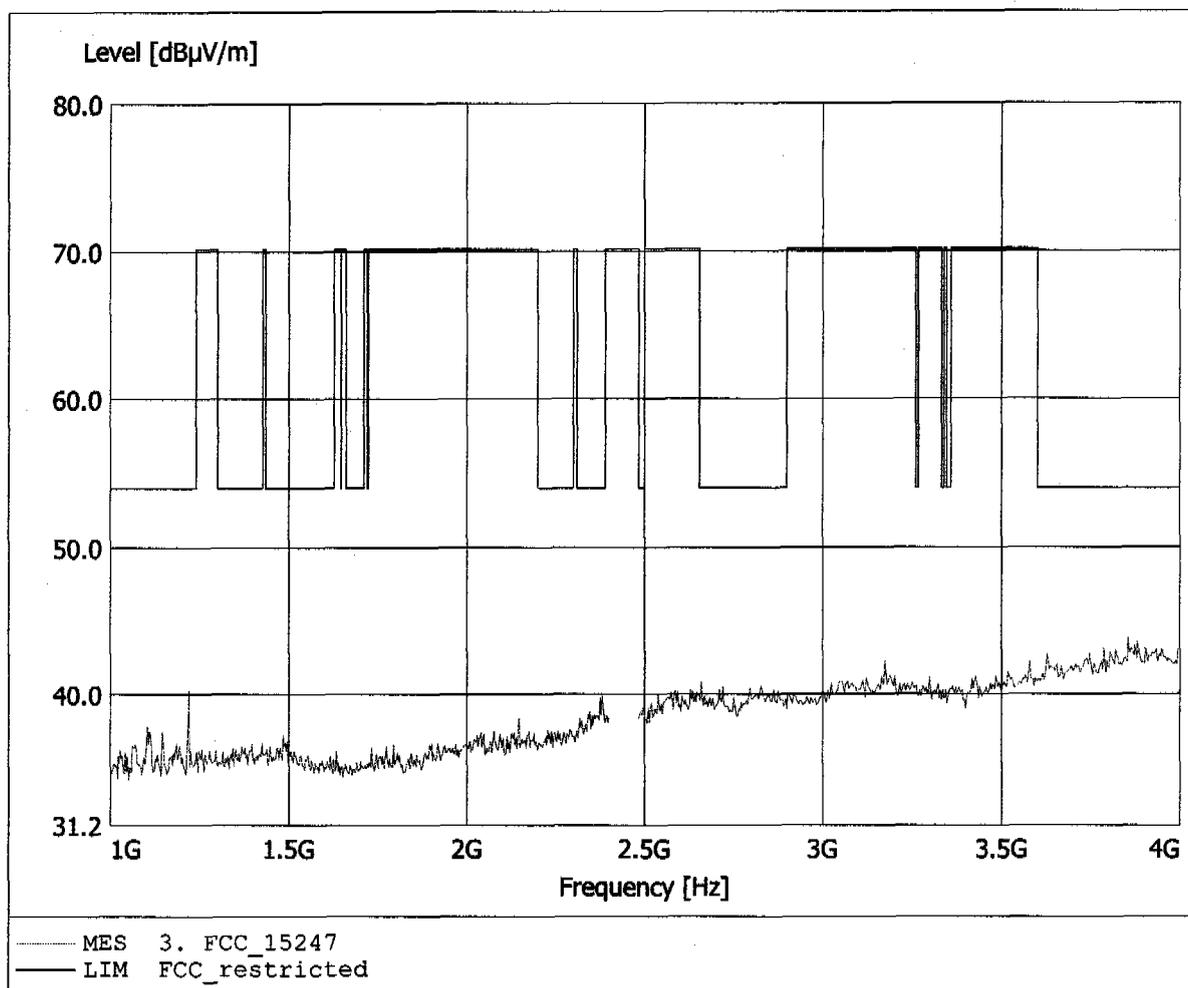


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2441MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.  
Comment 2: Freq: 3.927GHz, Emax: 43.65dBµV/m, RBW: 1MHz

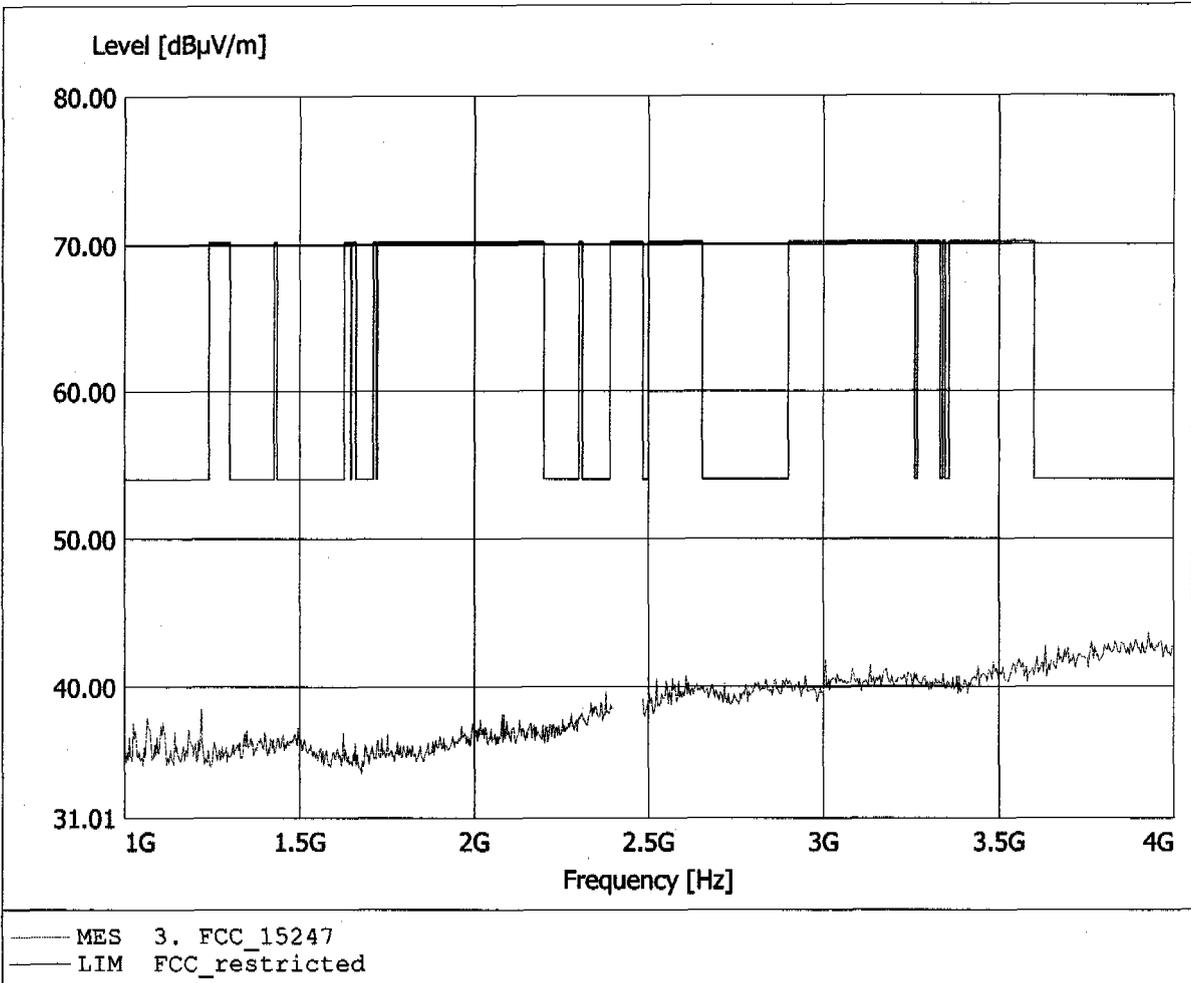


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2441MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 7.976GHz, Emax: 38.86dBµV/m, RBW: 1MHz

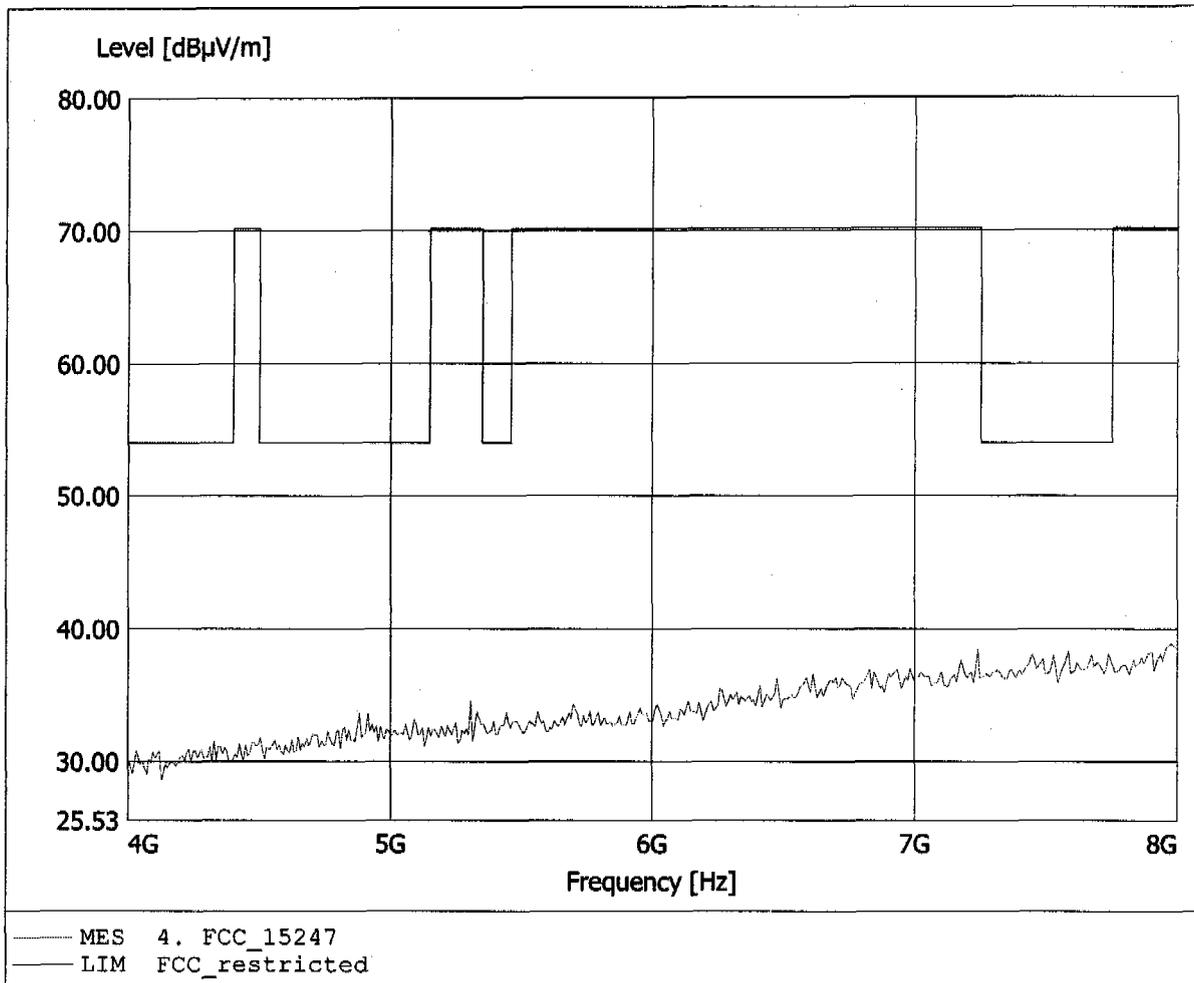


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2441MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 7.984GHz, Emax: 38.91dBµV/m, RBW: 1MHz

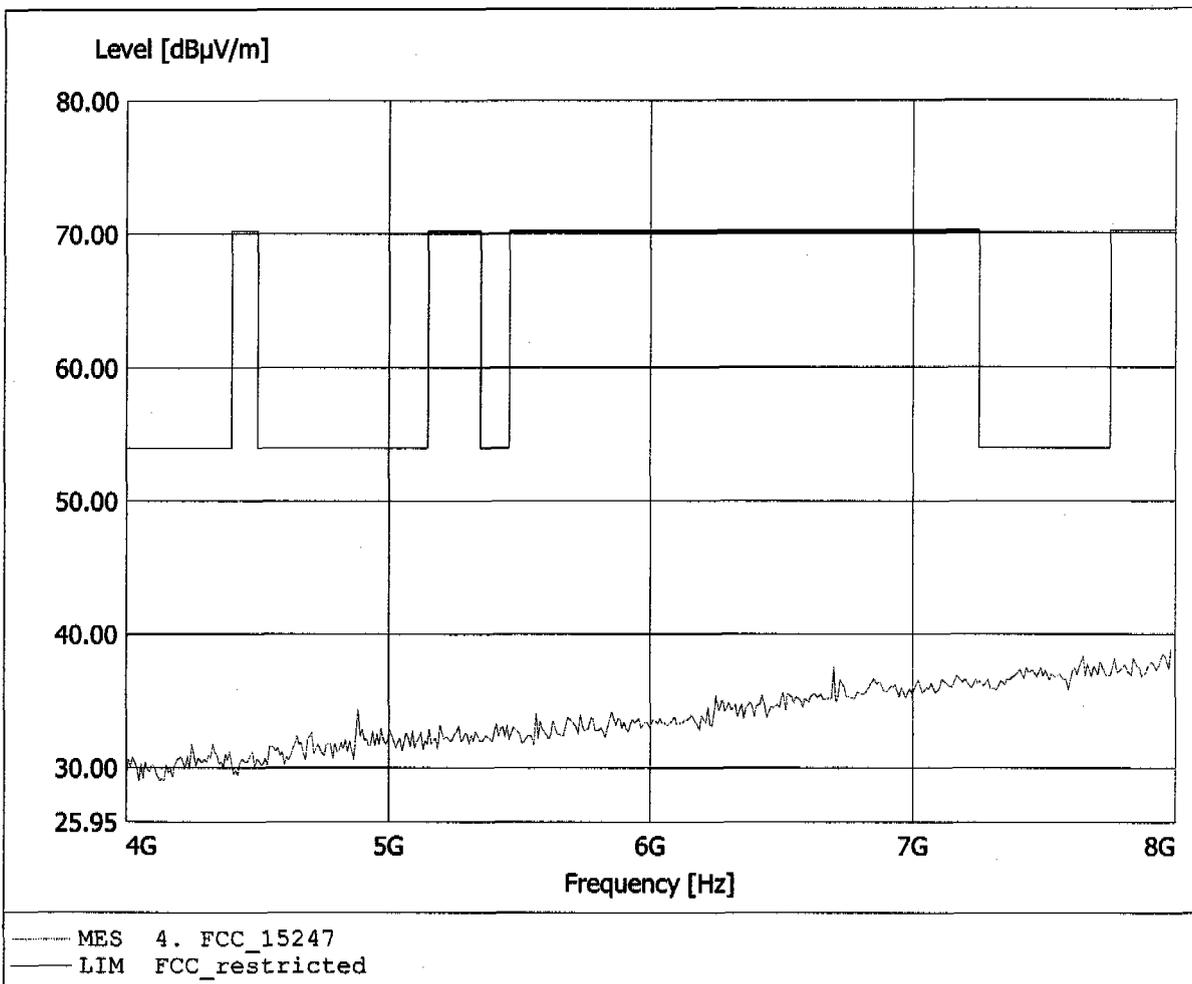


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2441MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 11.415GHz, Emax: 42.40dBuV/m, RBW: 1MHz

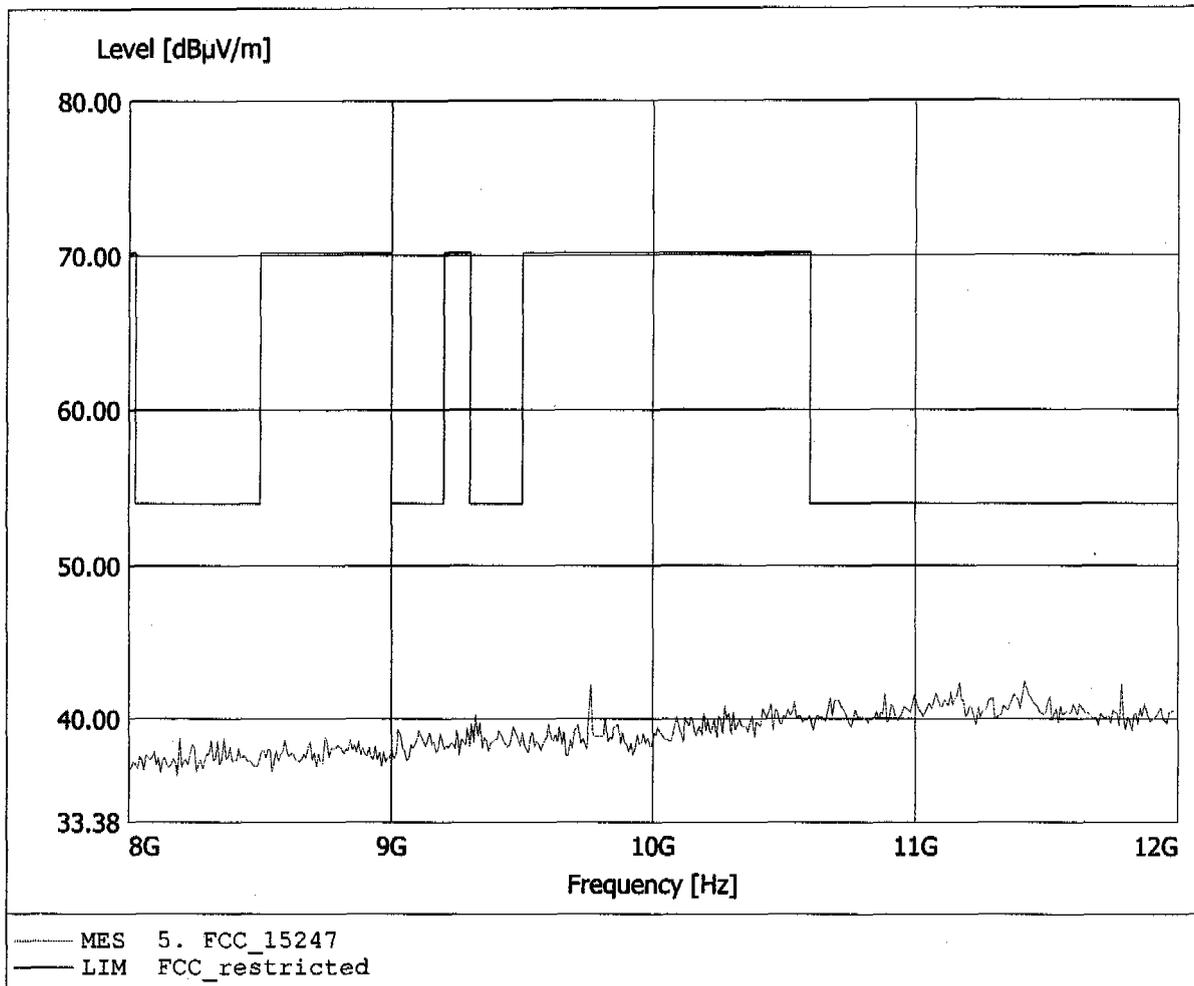


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2441MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 10.669GHz, Emax: 41.83dBµV/m, RBW: 1MHz

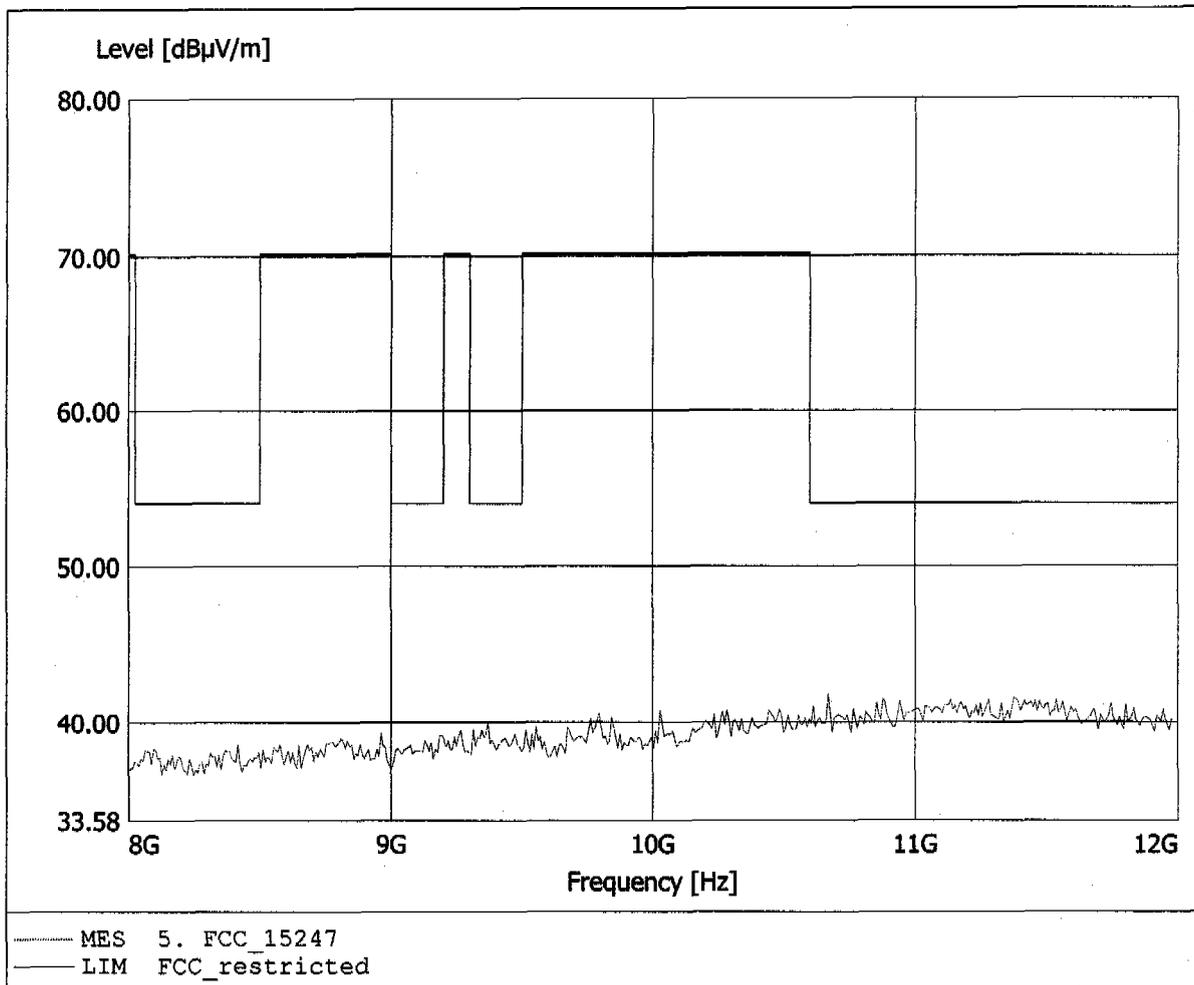


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2441MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 14.365GHz, Emax: 45.57dBµV/m, RBW: 1MHz

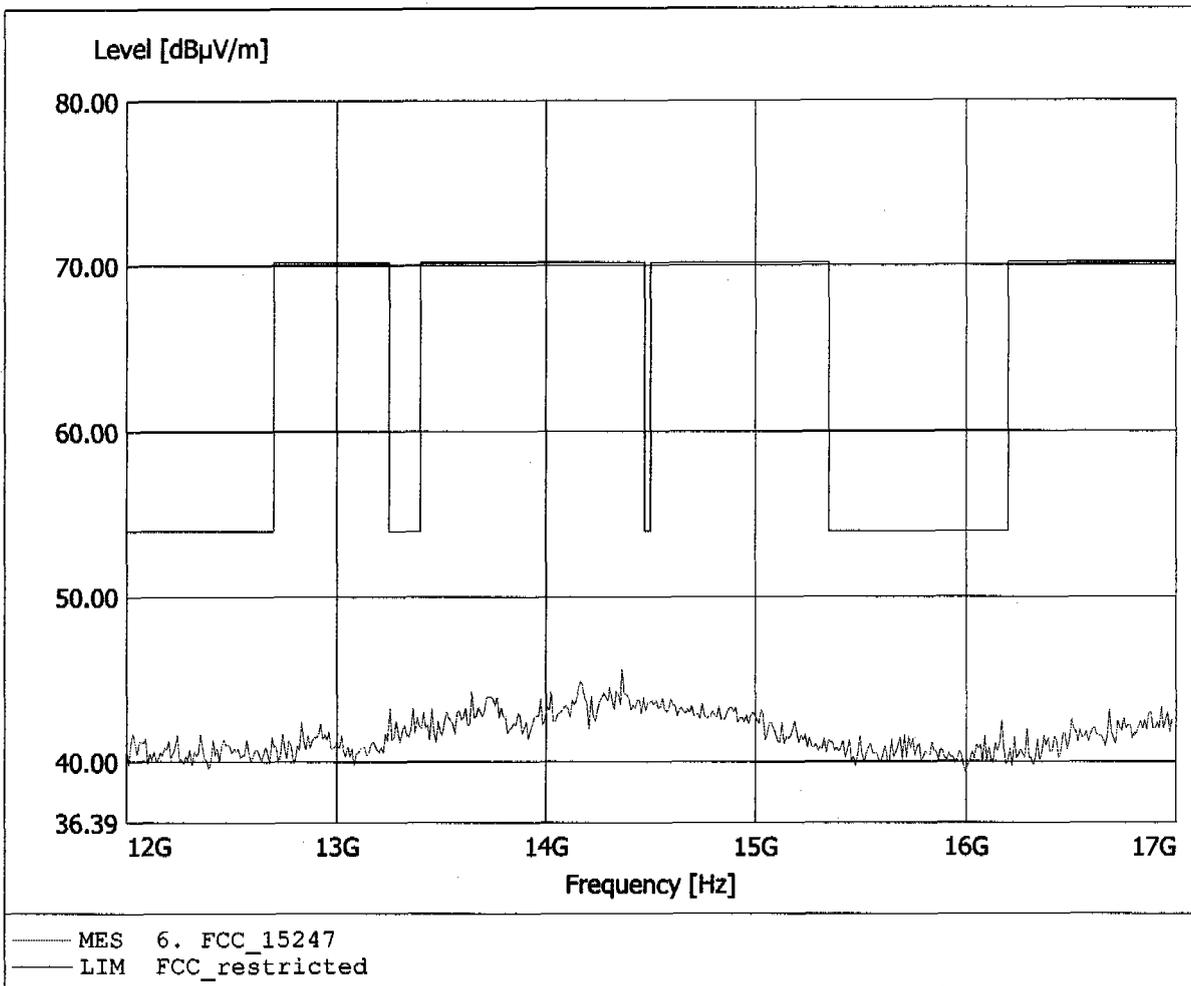


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2441MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 14.836GHz, Emax: 45.11dBµV/m, RBW: 1MHz

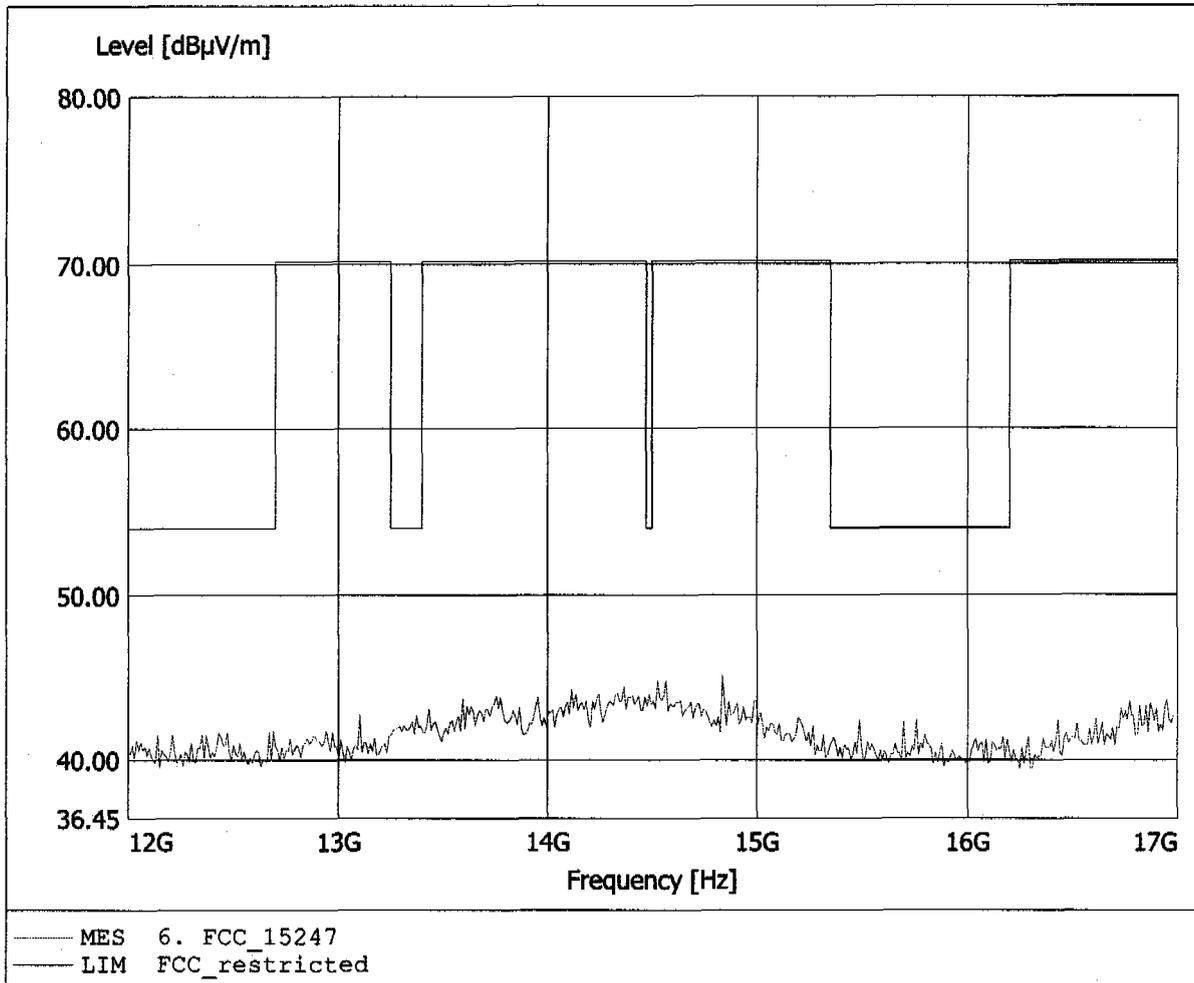


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2441 MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 17.038GHz, Emax: 45.09dBµV/m, RBW: 1MHz

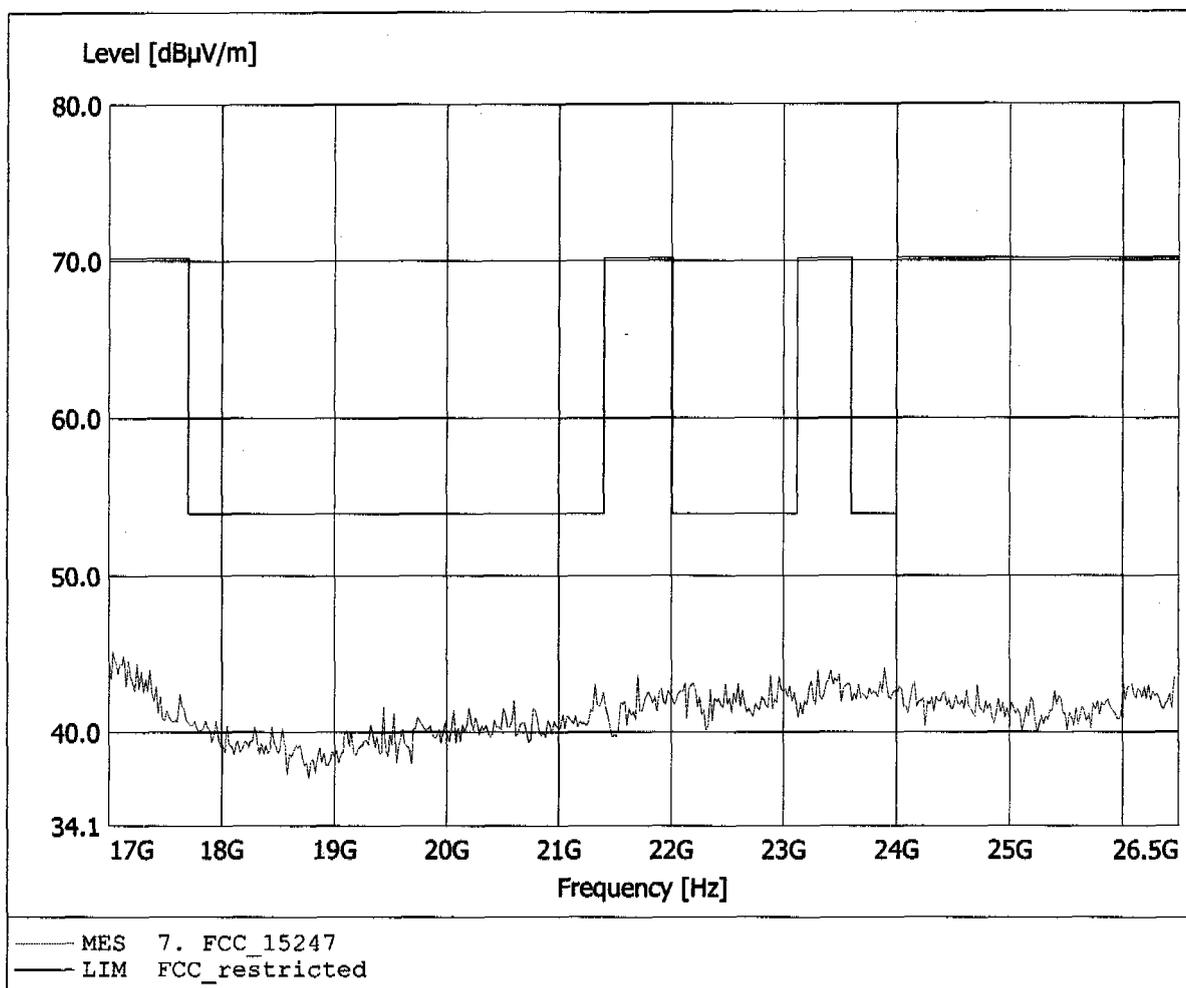


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2441 MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 17.228GHz, Emax: 44.72dBµV/m, RBW: 1MHz

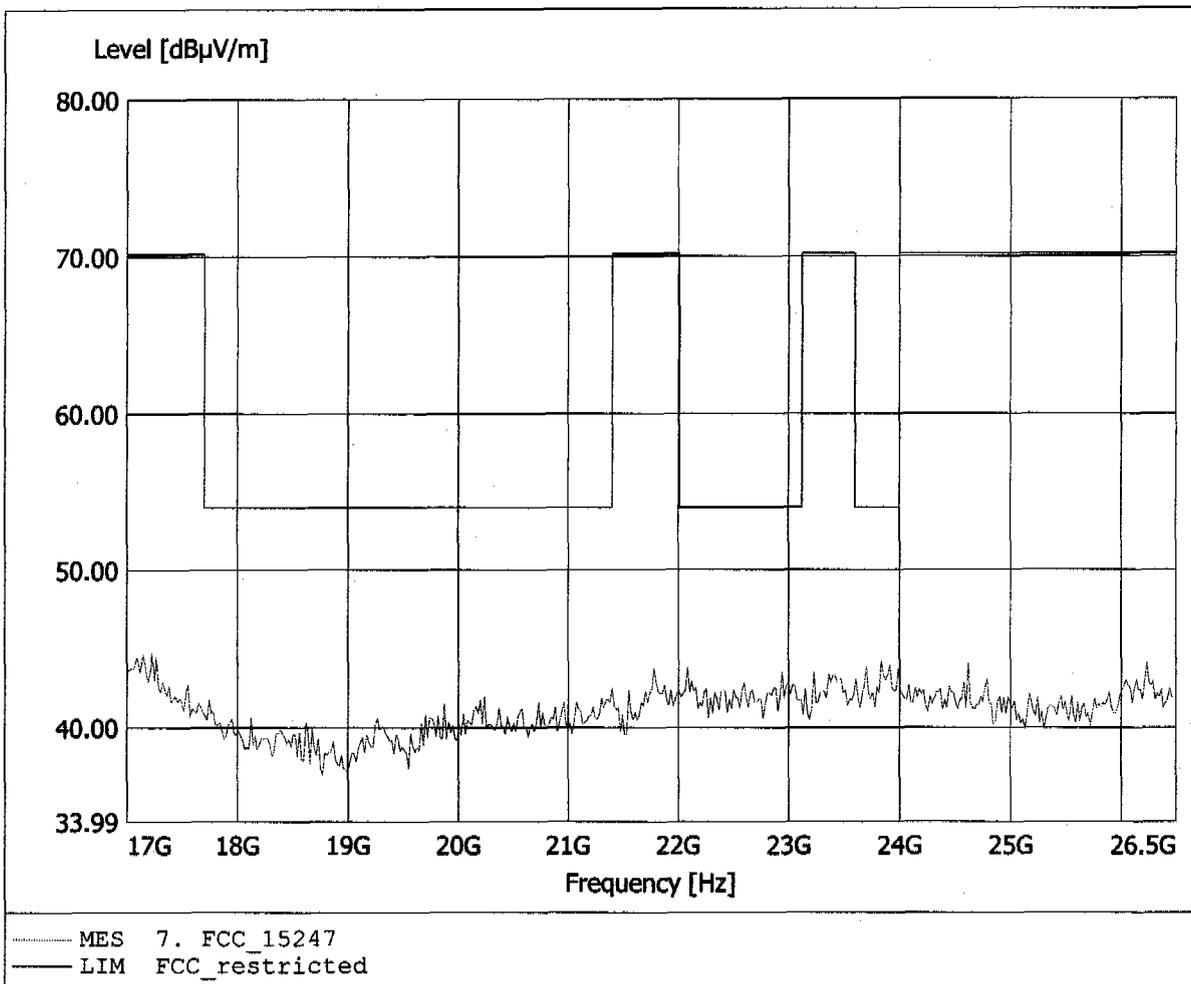


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2402MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 186.032MHz, Emax: 32.92dBµV/m, RBW: 100kHz

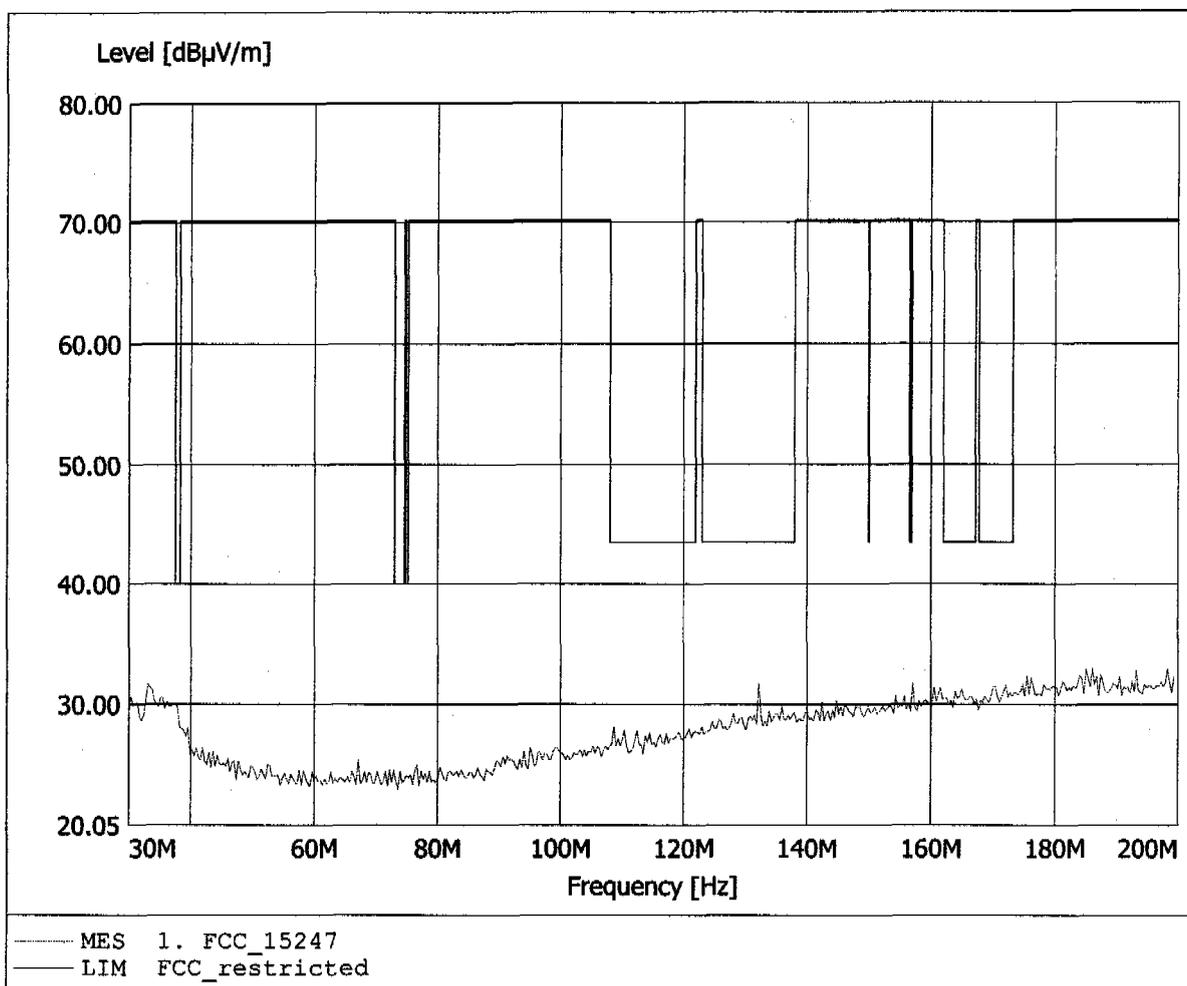


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2402MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 32.725MHz, Emax: 36.91dBµV/m, RBW: 100kHz

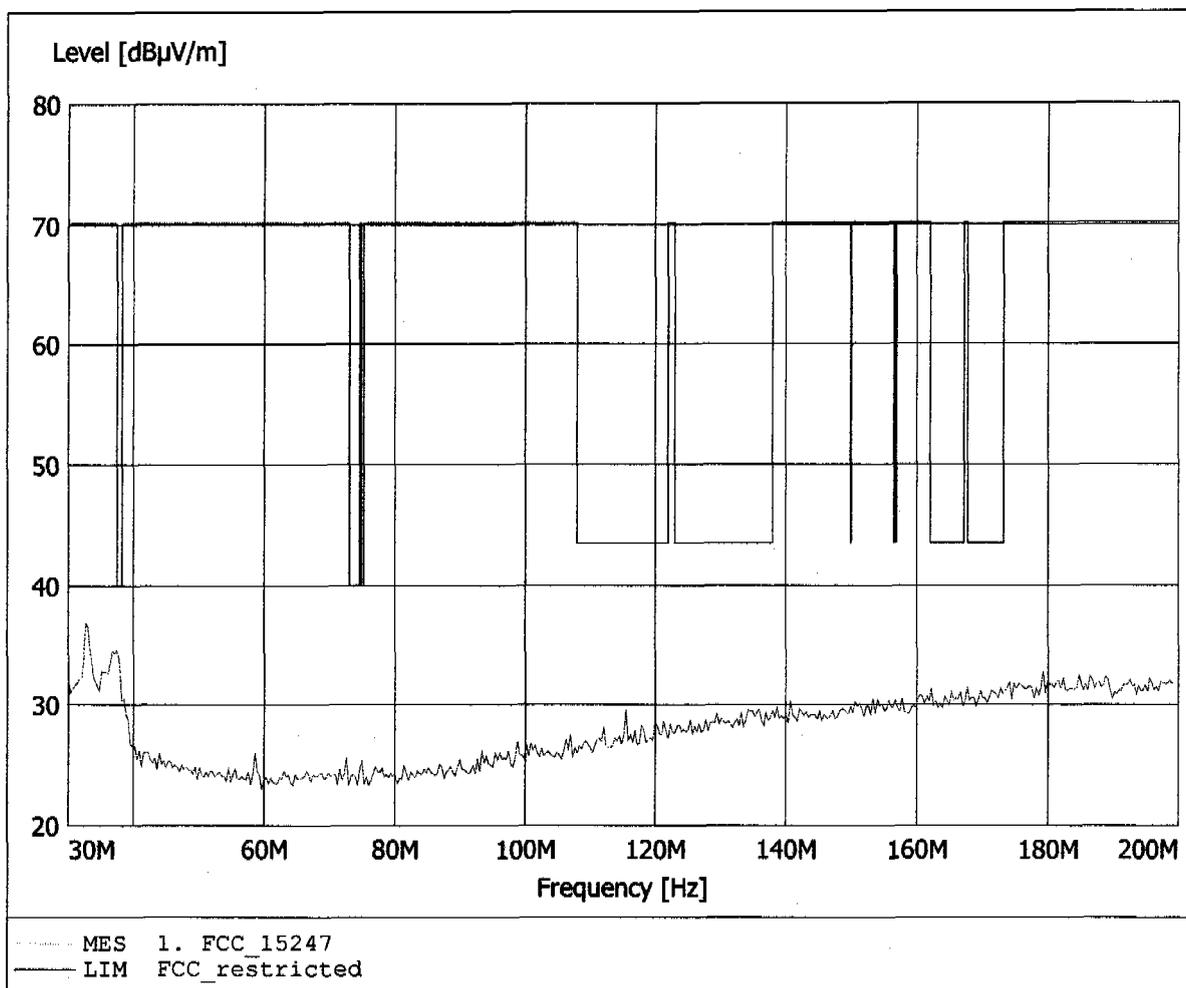


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2402MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Comment 2: Freq: 594.389MHz, Emax: 32.22dBµV/m, RBW: 100kHz

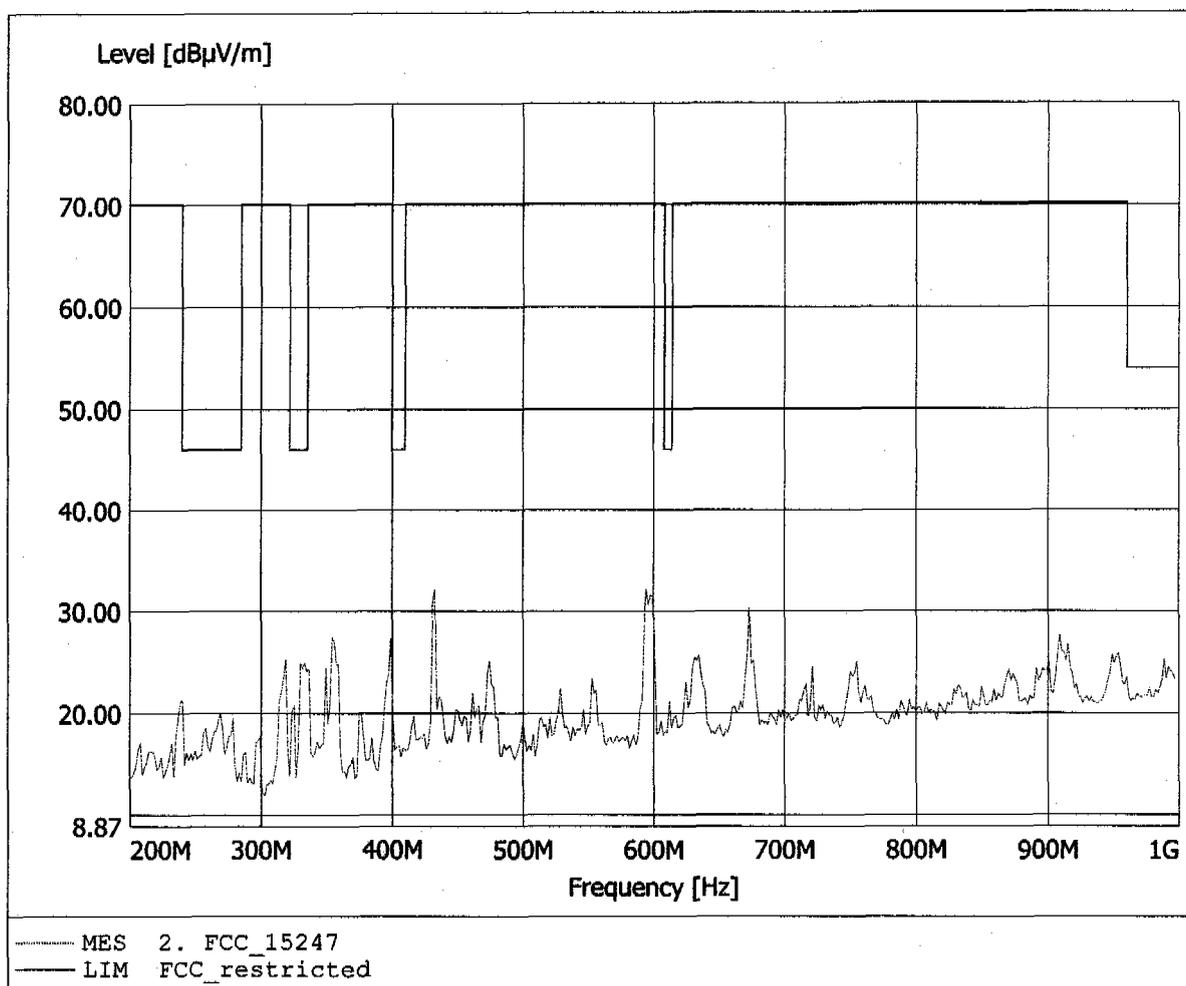


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2402MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Comment 2: Freq: 599.198MHz, Emax: 35.16dBµV/m, RBW: 100kHz

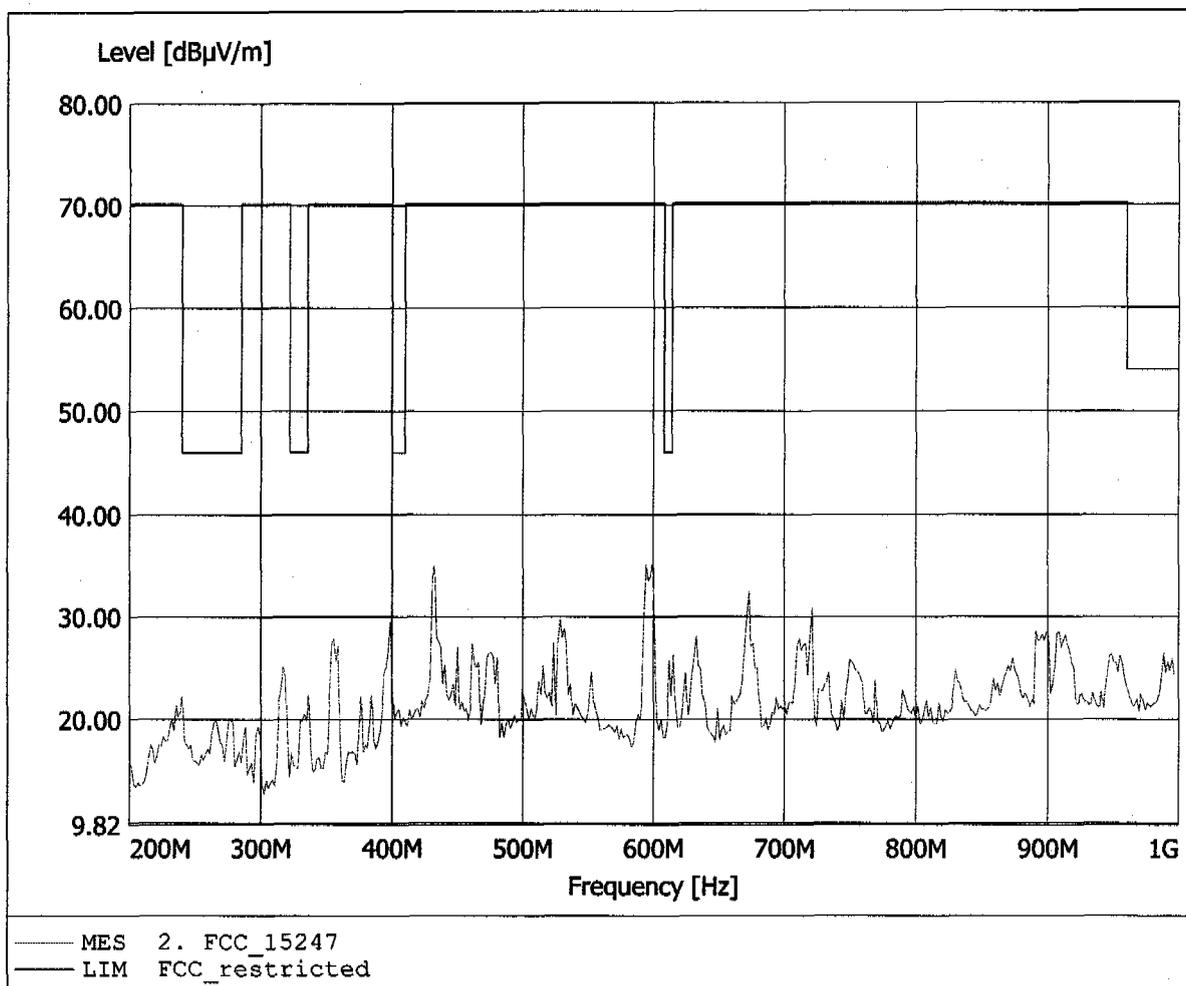


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2402MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.  
Comment 2: Freq: 2.400GHz, Emax: 62.30dBµV/m, RBW: 1MHz

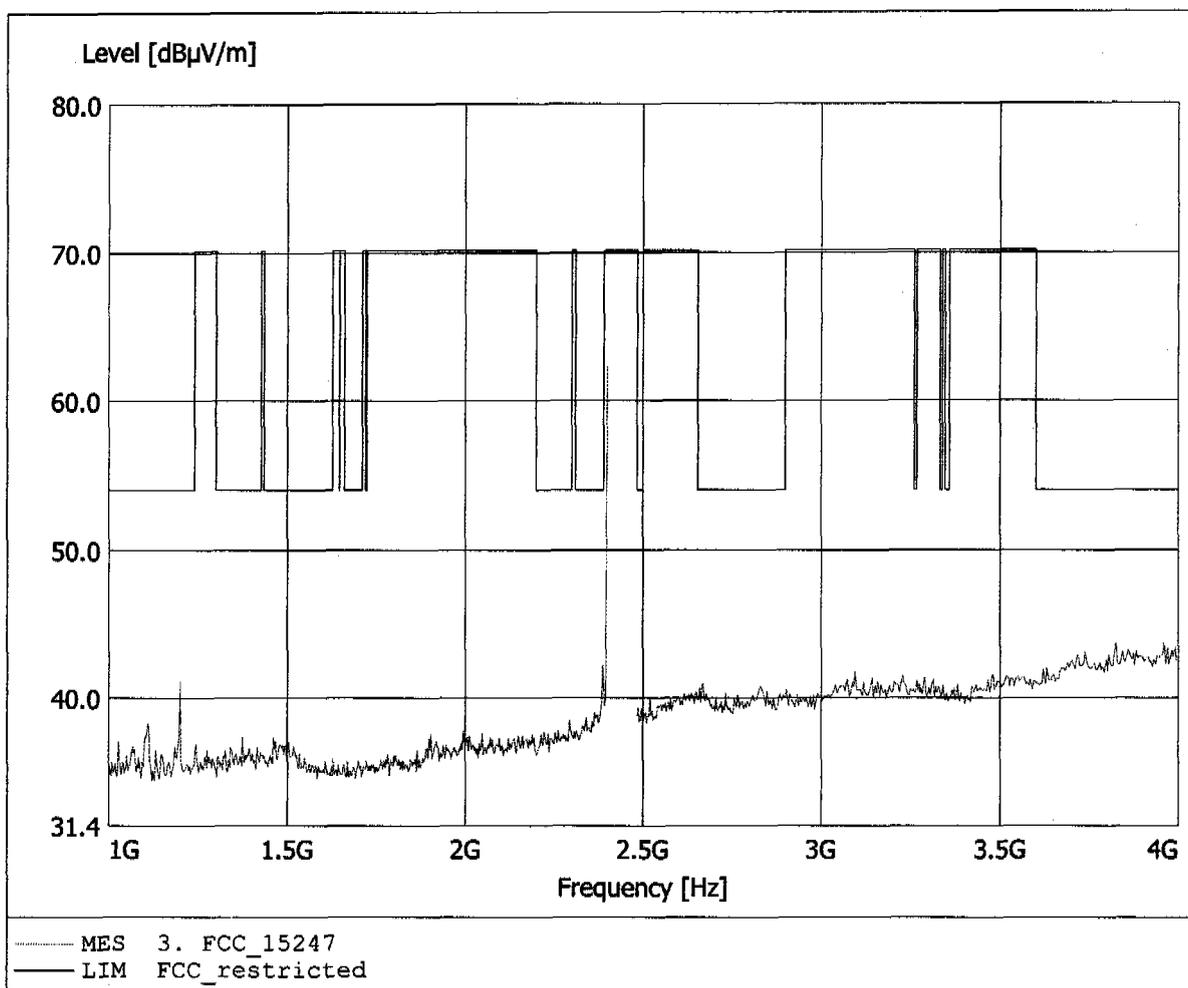


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
 EUT : Bluetooth Headset / 2402MHz  
 Model: Jabra BT110  
 Test Site / Operator: ETS / Mr. Meng  
 Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
 Test Specification: according to §15.247, peak detector  
 Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.  
 Comment 2: Freq: 2.400GHz, Emax: 62.30dBµV/m, RBW: 1MHz

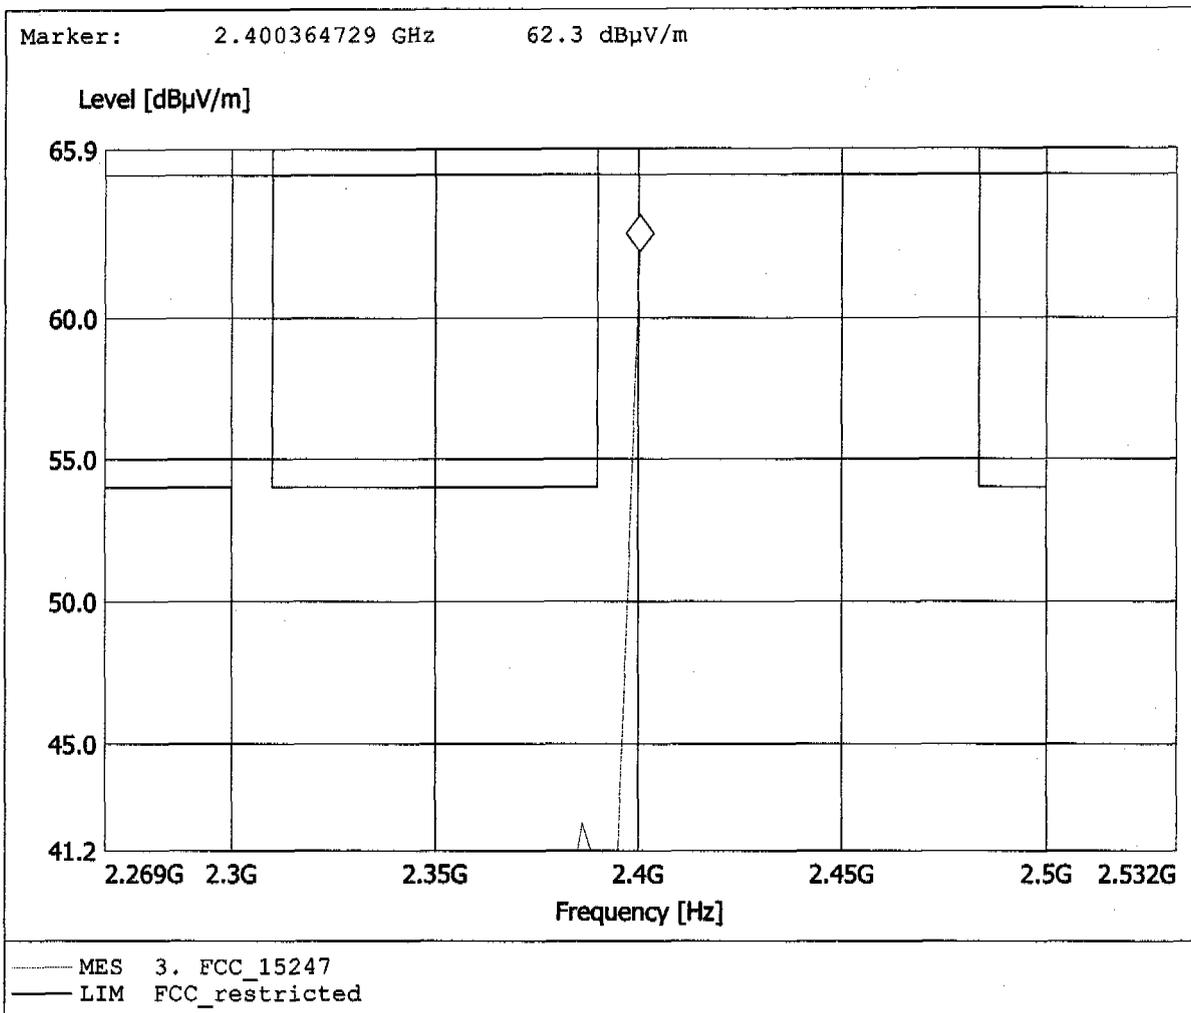


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2402MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.  
Comment 2: Freq: 2.400GHz, Emax: 62.14dBµV/m, RBW: 1MHz

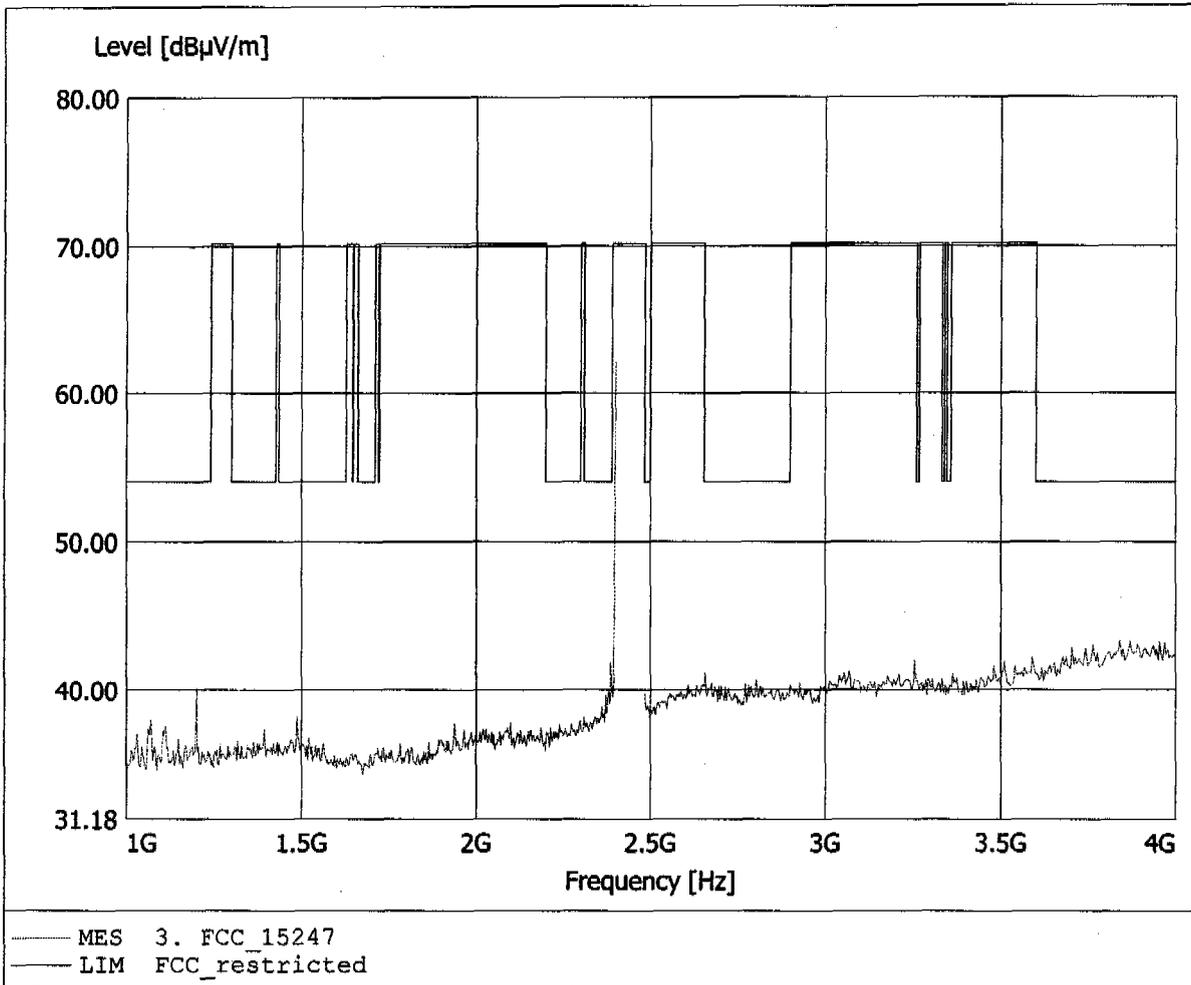


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2402MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.  
Comment 2: Freq: 2.400GHz, Emax: 62.14dBµV/m, RBW: 1MHz

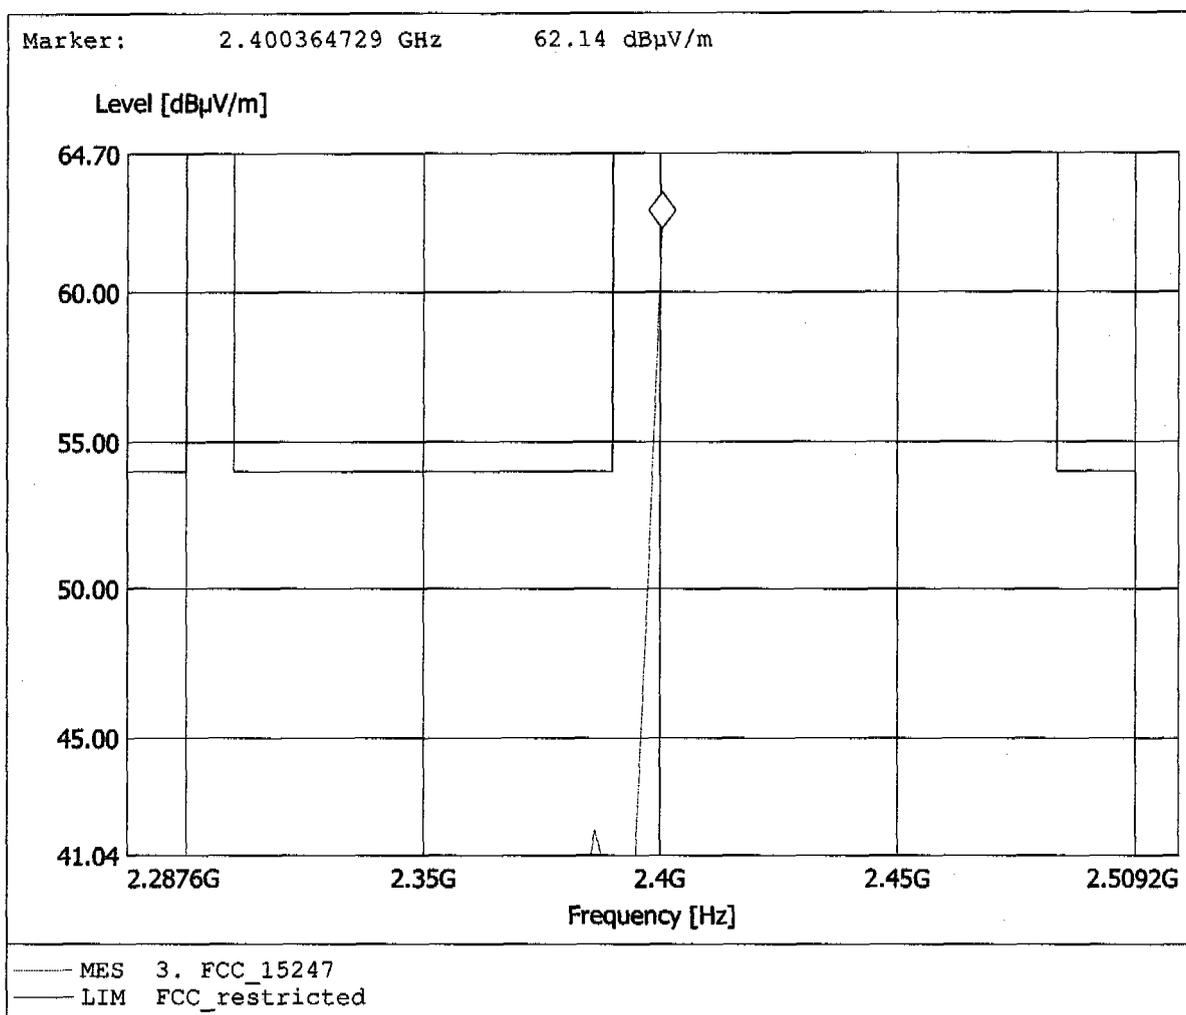


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2402MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 7.992GHz, Emax: 38.70dBµV/m, RBW: 1MHz

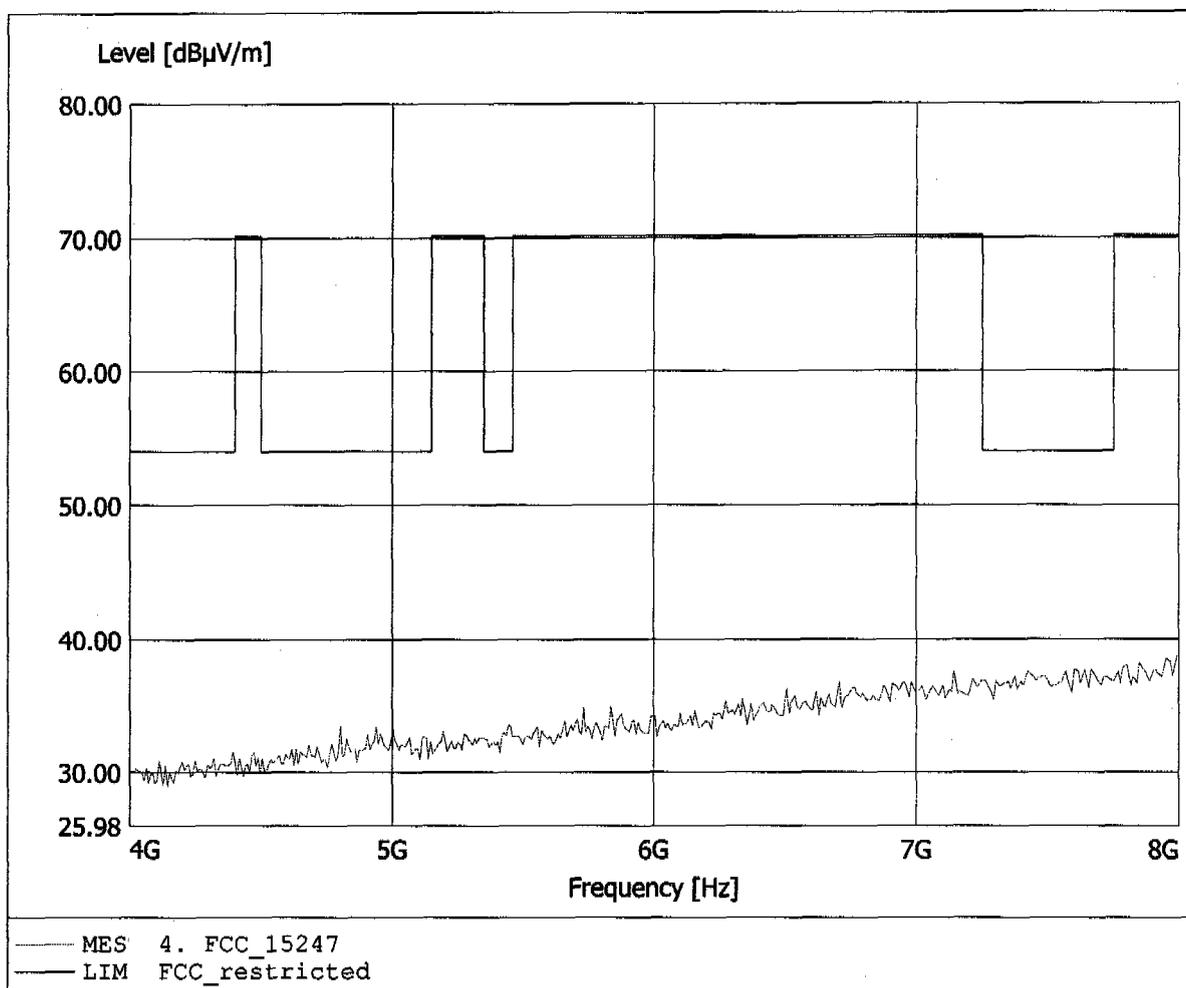


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2402MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 7.960GHz, Emax: 39.37dBµV/m, RBW: 1MHz

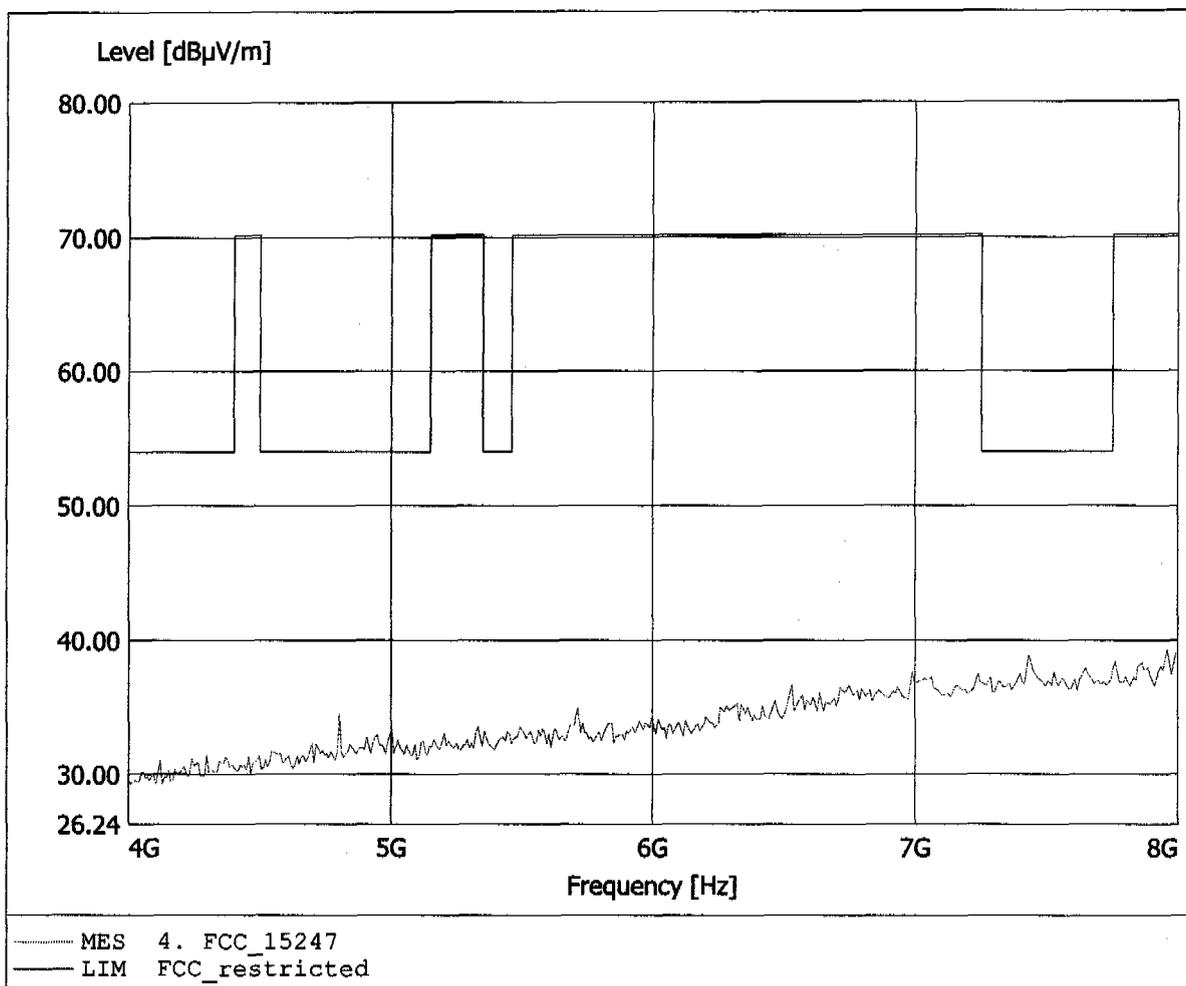


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2402MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 11.078GHz, Emax: 42.26dBµV/m, RBW: 1MHz

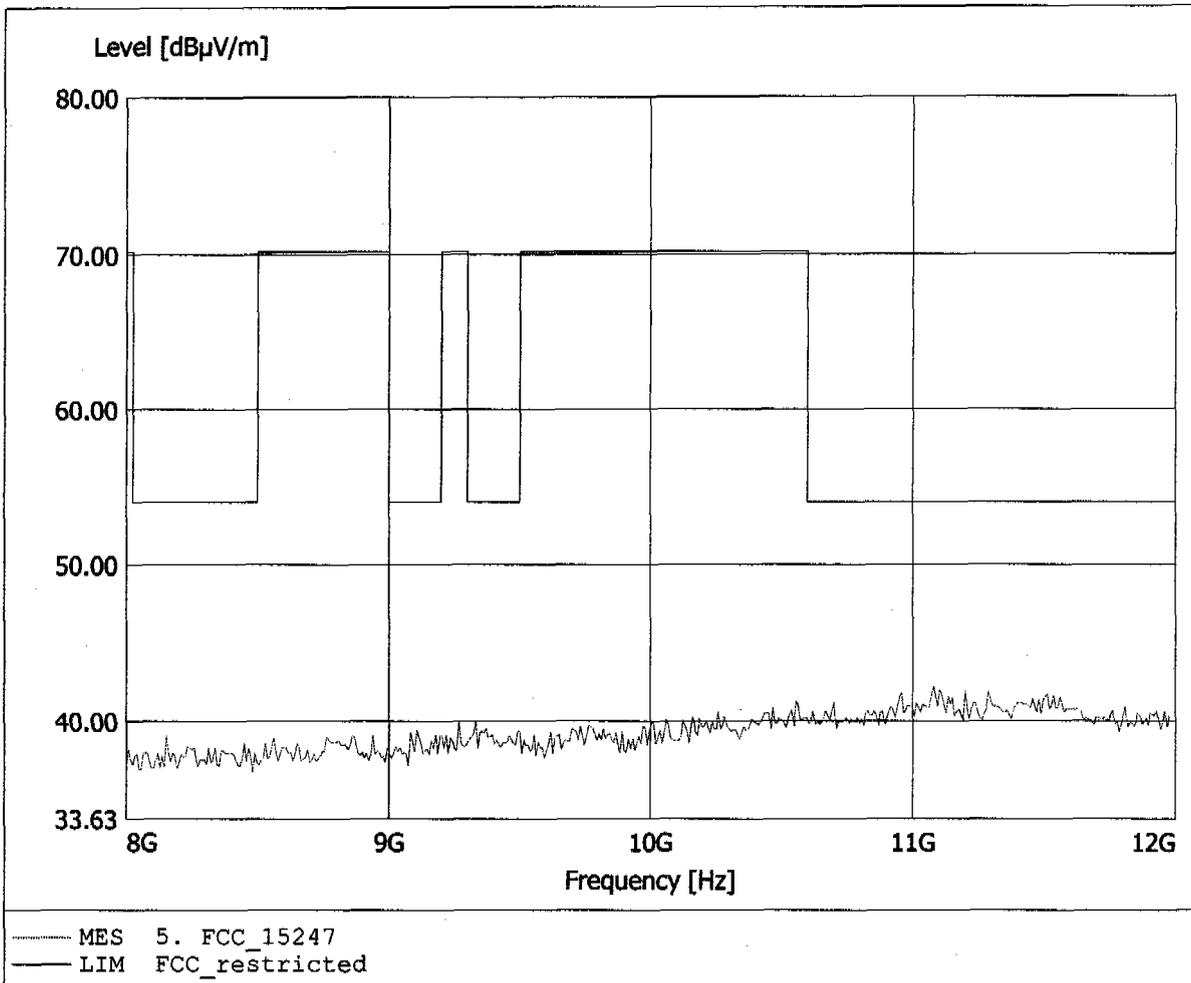


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2402MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 11.463GHz, Emax: 42.52dBµV/m, RBW: 1MHz

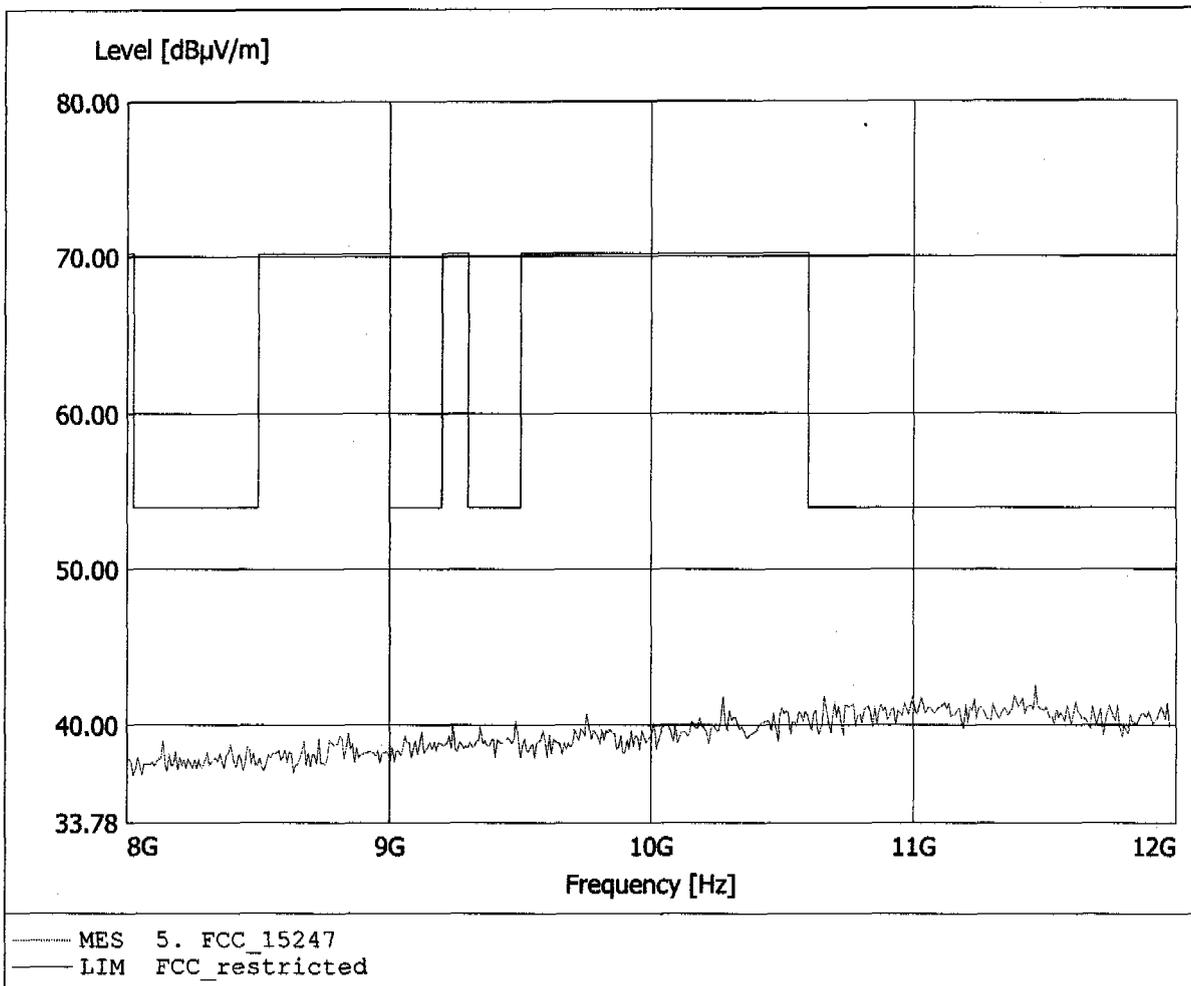


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2402MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 14.485GHz, Emax: 45.01dBµV/m, RBW: 1MHz

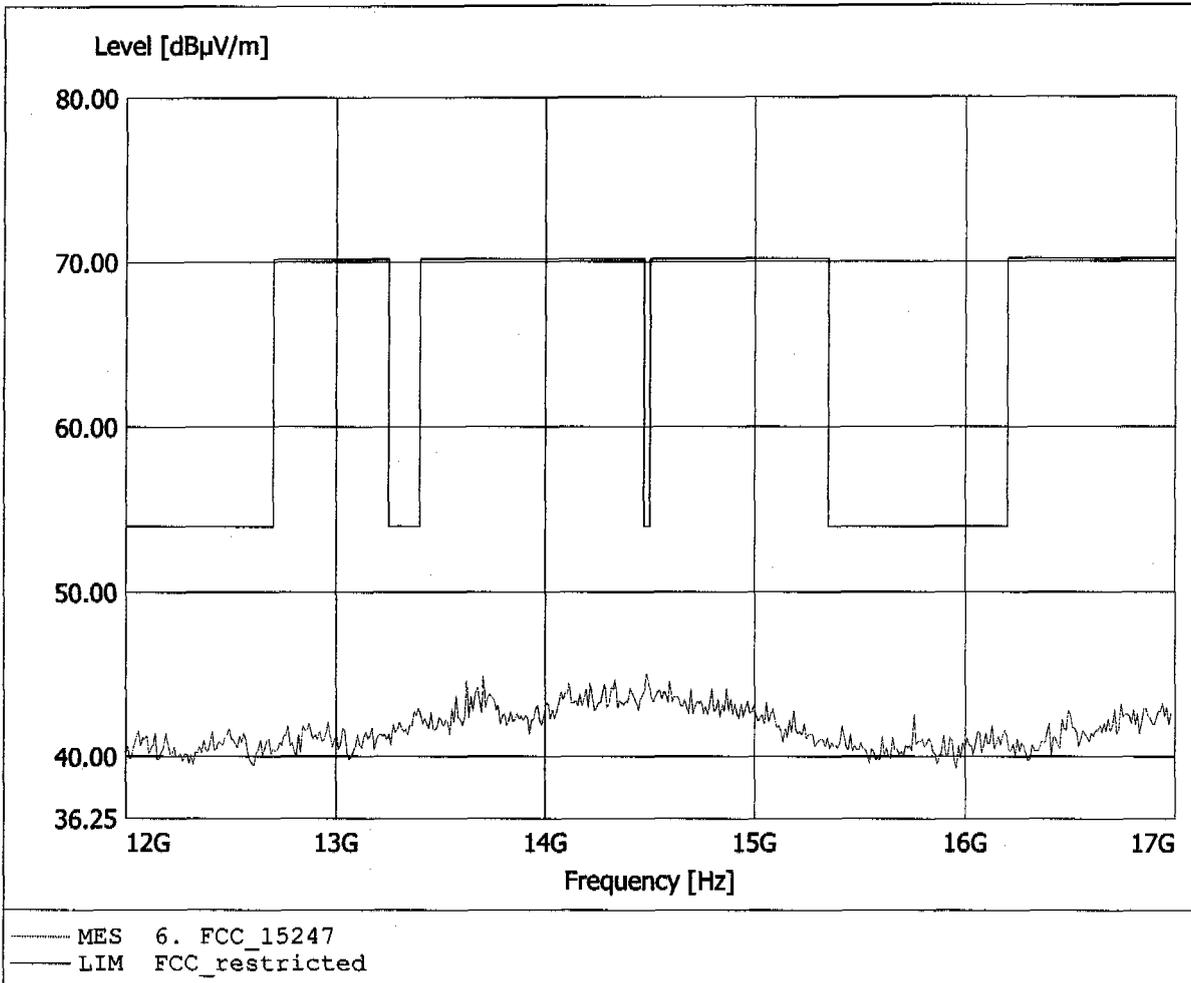


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2402MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 14.385GHz, Emax: 45.06dBµV/m, RBW: 1MHz

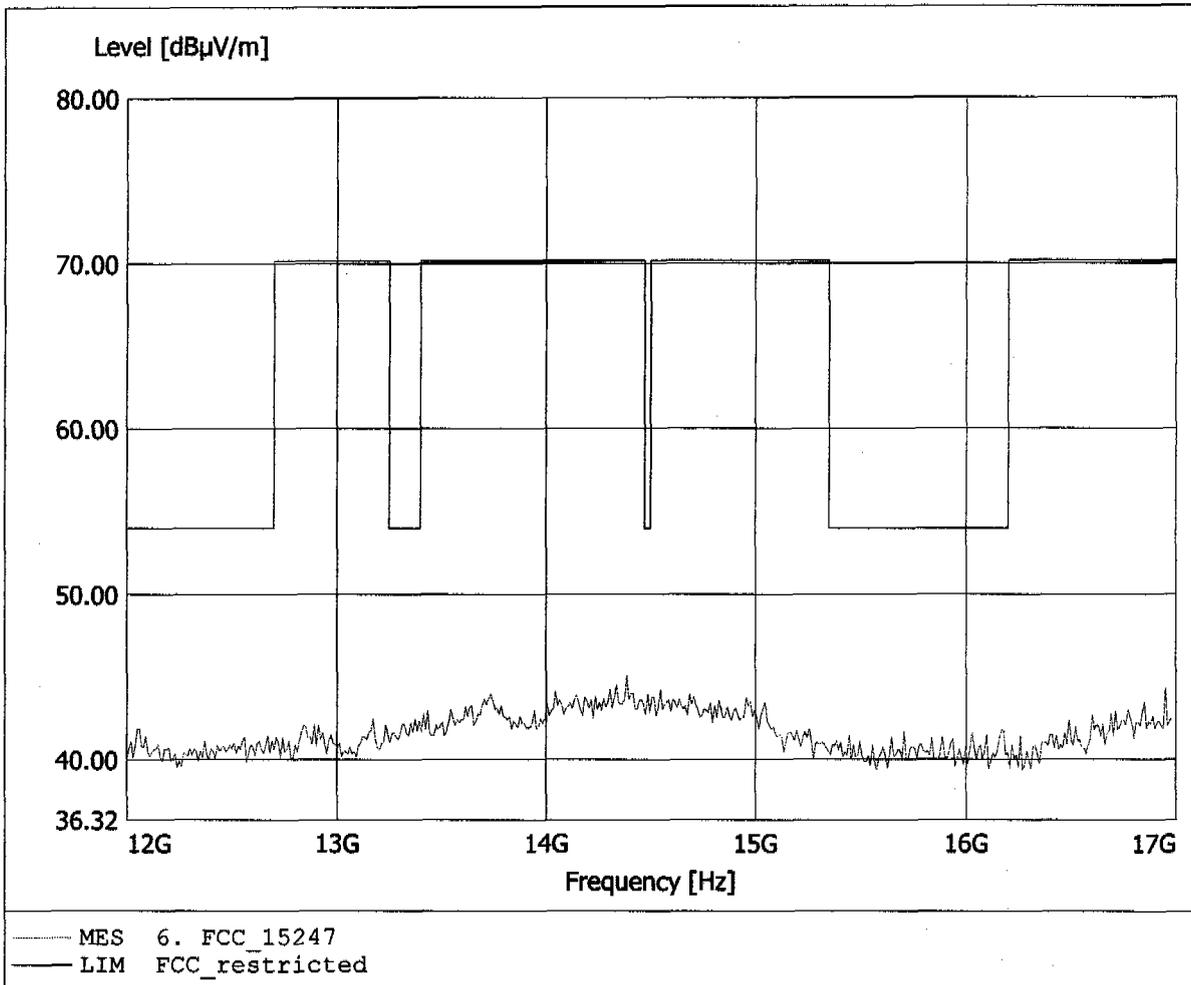


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2402 MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 17.114GHz, Emax: 45.32dBµV/m, RBW: 1MHz

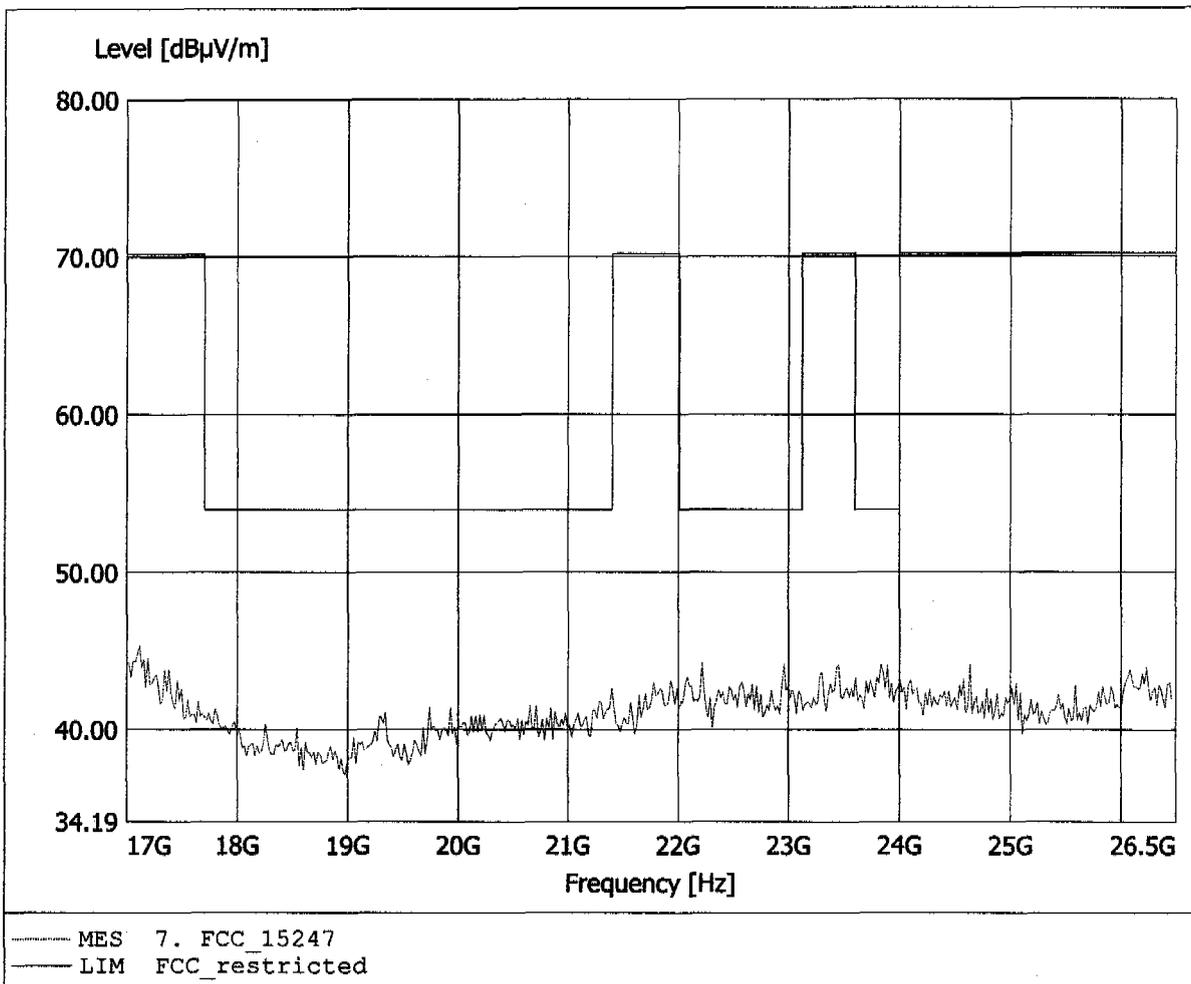

**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT : Bluetooth Headset / 2402 MHz  
Model: Jabra BT110  
Test Site / Operator: ETS / Mr. Meng  
Temperature/ Voltage: 25°C / Unom: 1.2 V DC (battery)  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 17.095GHz, Emax: 45.26dBµV/m, RBW: 1MHz

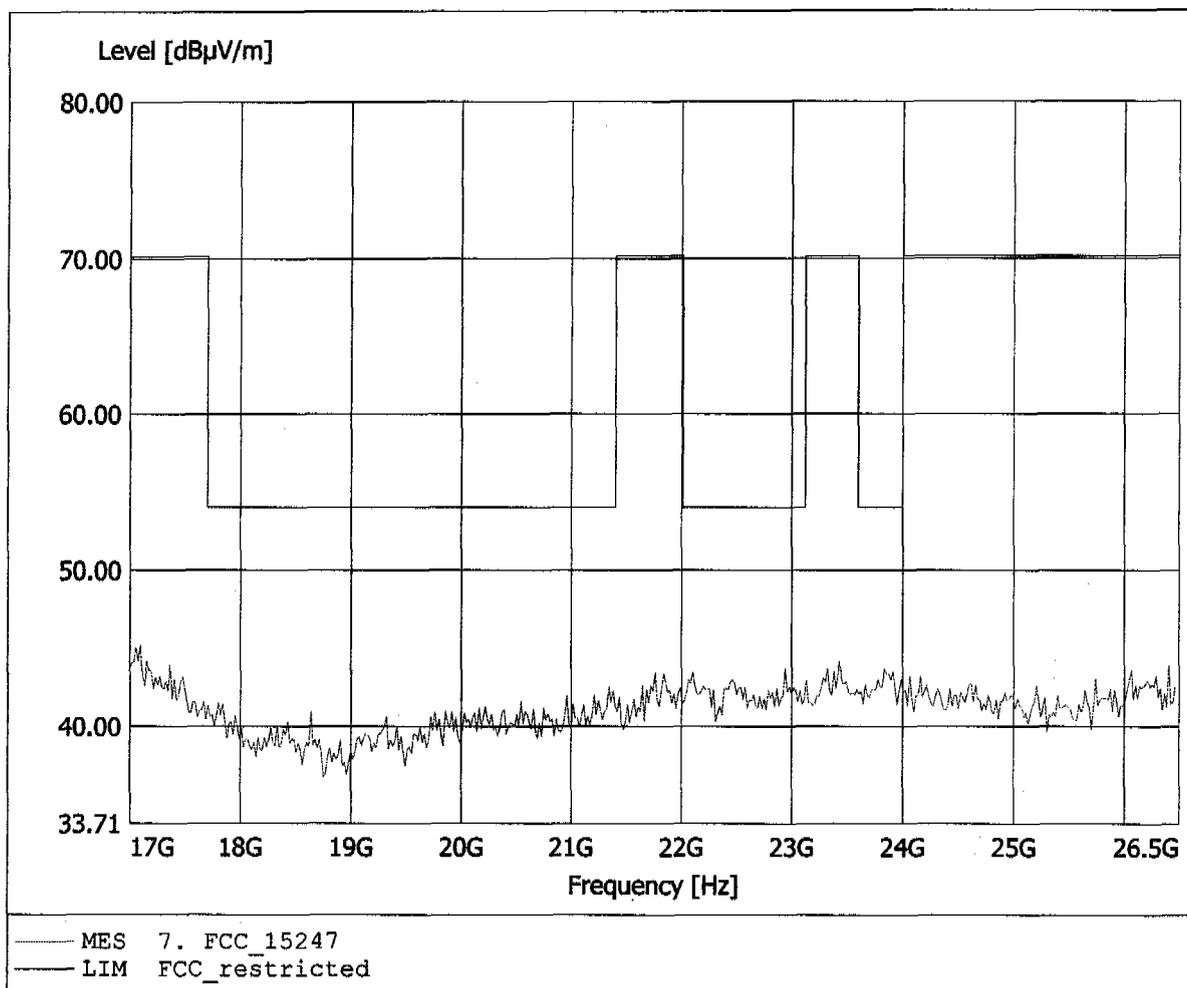



## Appendix D

Spurious Emissions conducted - Transmitter operating




## Appendix E

### Carrier Frequency Separation



Delta 1 [T1] REW 100 kHz RF Att 40 dB  
Ref Lvl 0.04 dB VBW 100 kHz  
10 dBm 1.00080160 MHz SWT 5 ms Unit dBm

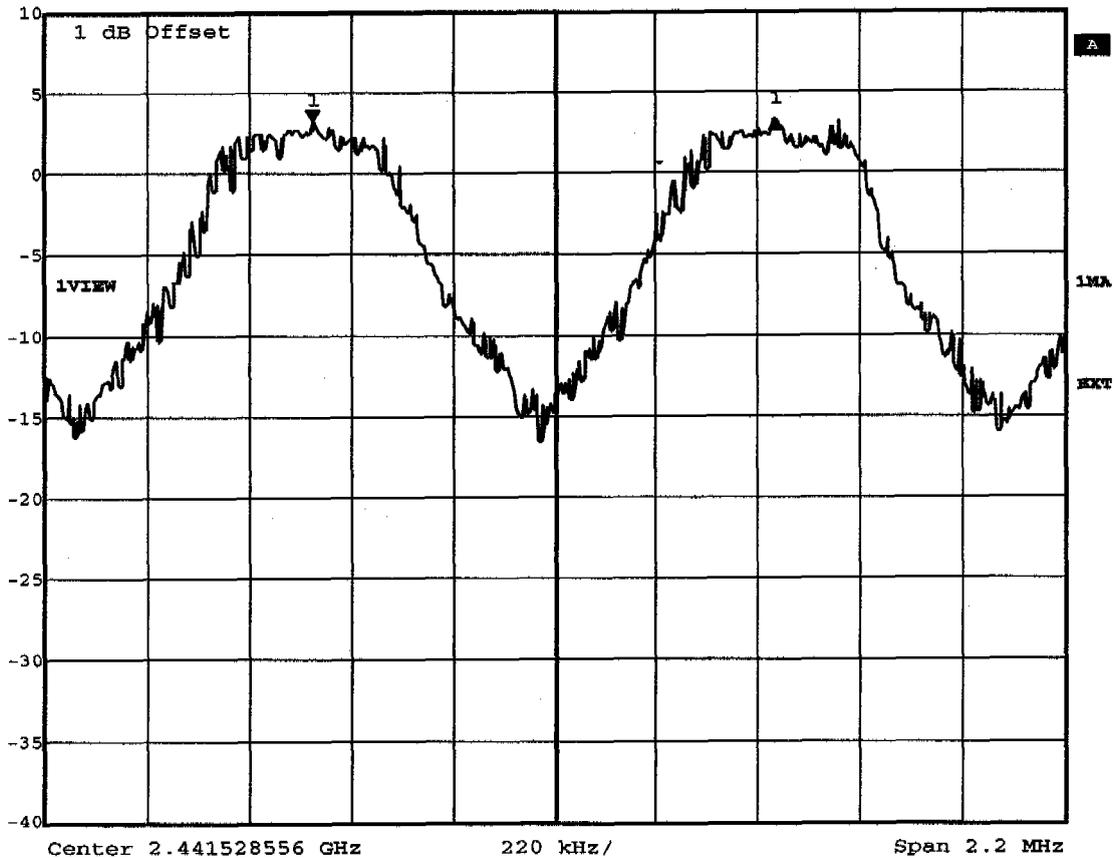

Title: Carrier Frequency Separation  
Comment A: Jabra BT110  
Date: 29.JUL.2004 09:45:32




## Appendix F

Number of Hopping Frequencies



Ref Lvl  
20 dBm

REW 300 kHz RF Att 40 dB  
VBW 300 kHz  
SWT 5 ms Unit dBm

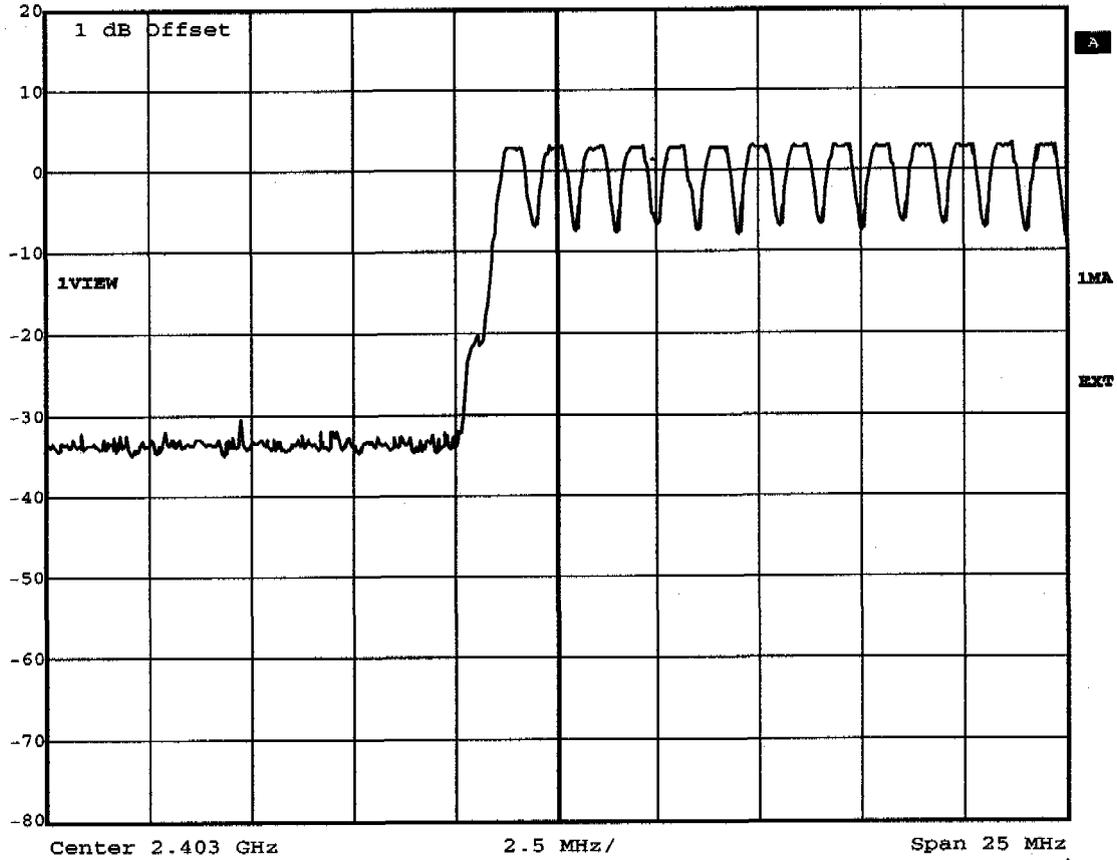


Title: Number of Hopping Frequencies Ch.: 0-13  
Comment A: Jabra BT110  
Date: 29.JUL.2004 09:51:33



Ref Lvl  
20 dBm

RBW 300 kHz RF Att 40 dB  
VEW 300 kHz  
SWT 5 ms Unit dBm

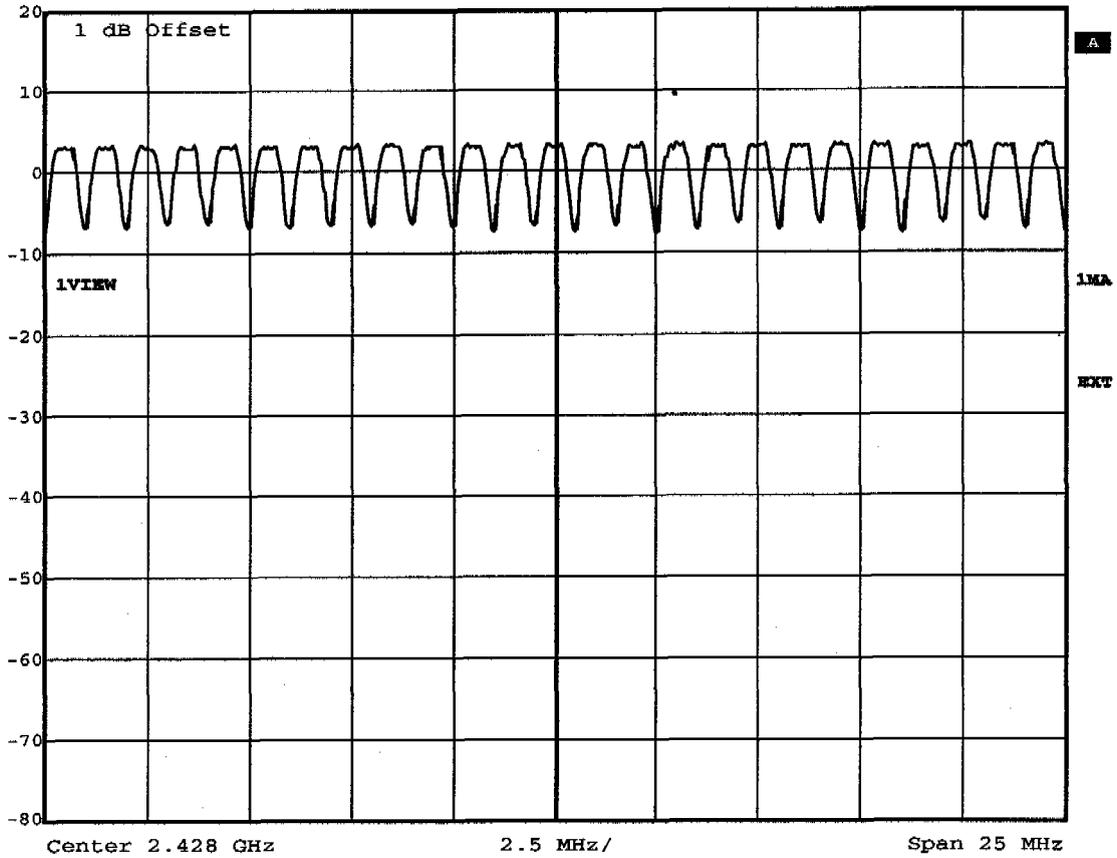


Title: Number of Hopping Frequencies Ch.: 14-38  
Comment A: Jabra BT110  
Date: 29.JUL.2004 09:52:55



Ref Lvl  
20 dBm

RBW 300 kHz RF Att 40 dB  
VBW 300 kHz  
SWT 5 ms Unit dBm

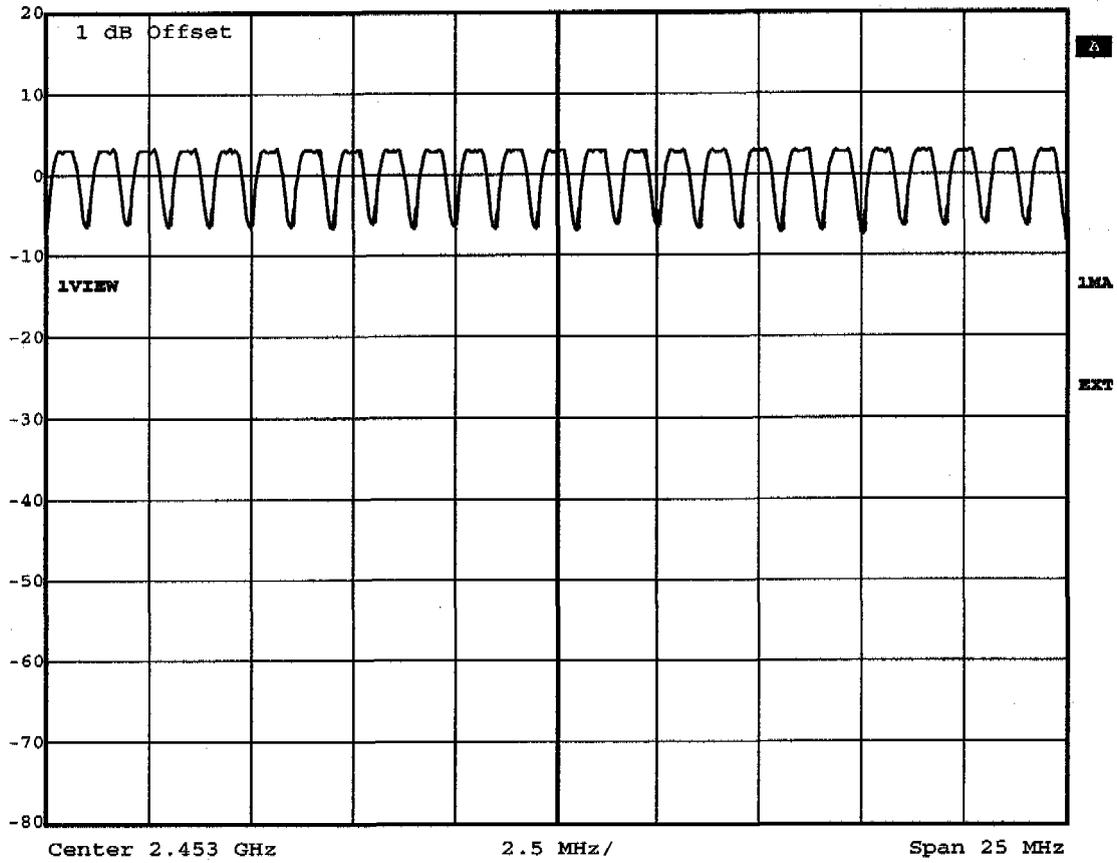


Title: Number of Hopping Frequencies Ch.: 39-63  
Comment A: Jabra BT110  
Date: 29.JUL.2004 09:56:21



Ref Lvl  
20 dBm

RBW 300 kHz RF Att 40 dB  
VBW 300 kHz  
SWT 5 ms Unit dBm

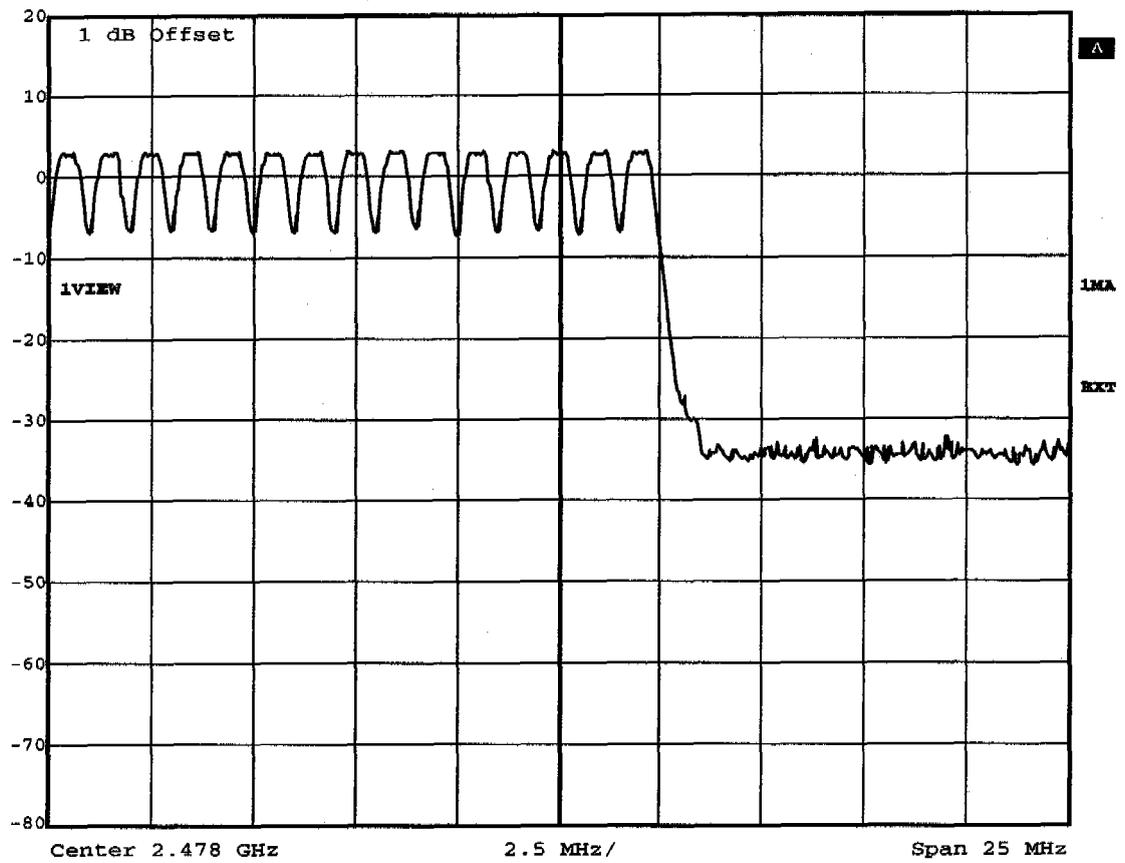

Title: Number of Hopping Frequencies Ch.: 64-78  
Comment A: Jabra BT110  
Date: 29.JUL.2004 09:57:33




## Appendix G

Time of Occupancy (Dwell Time)




Delta 1 [T1] RBW 1 MHz RF Att 20 dB  
Ref Lvl -0.11 dB VBW 1 MHz  
10 dBm 2.912689 ms SWT 5 ms Unit dBm

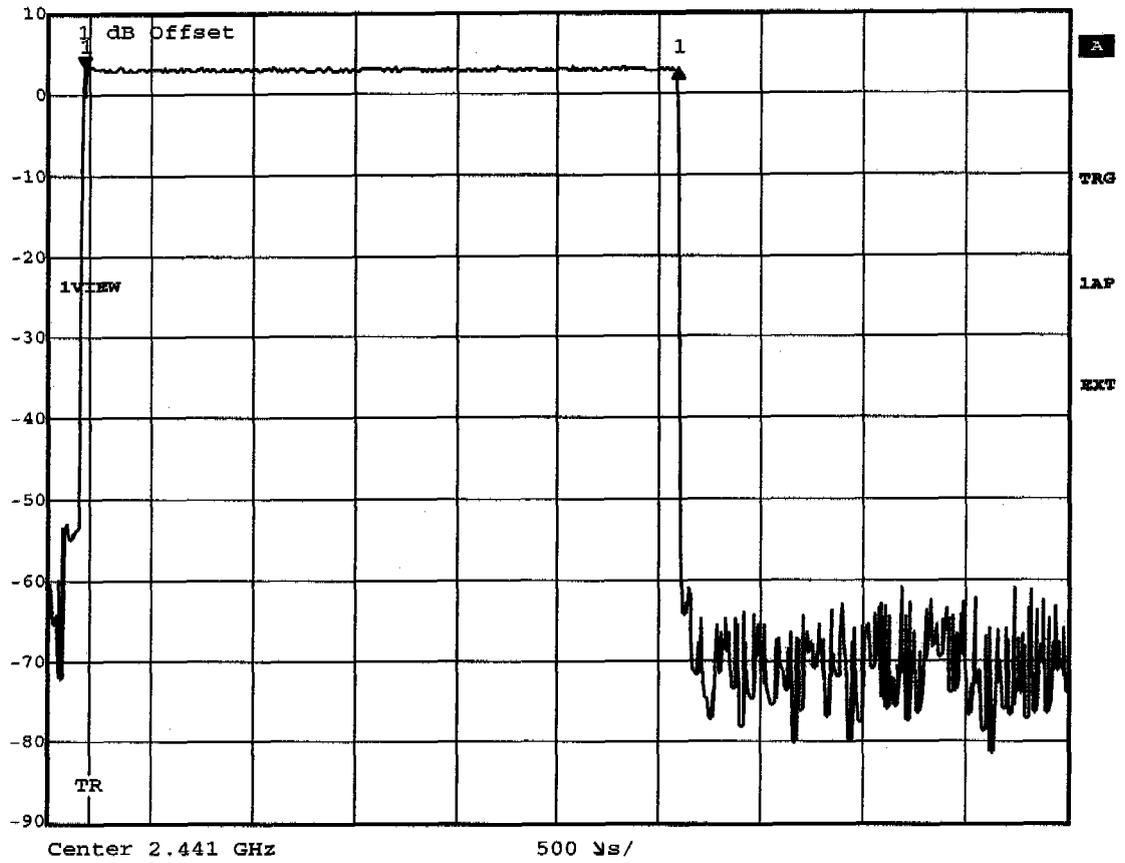

Title: Time of occupancy (Hopping FHSS) 64 events \* 2.913ms=186.43ms  
Comment A: Jabra BT110  
Date: 29.JUL.2004 09:33:39



Delta 2 [T1]      RBW    1 MHz    RF Att    50 dB  
Ref Lvl            -0.15 dB    VEW    1 MHz  
28 dBm            6.288377 ms    SWT    11 ms    Unit            dBm

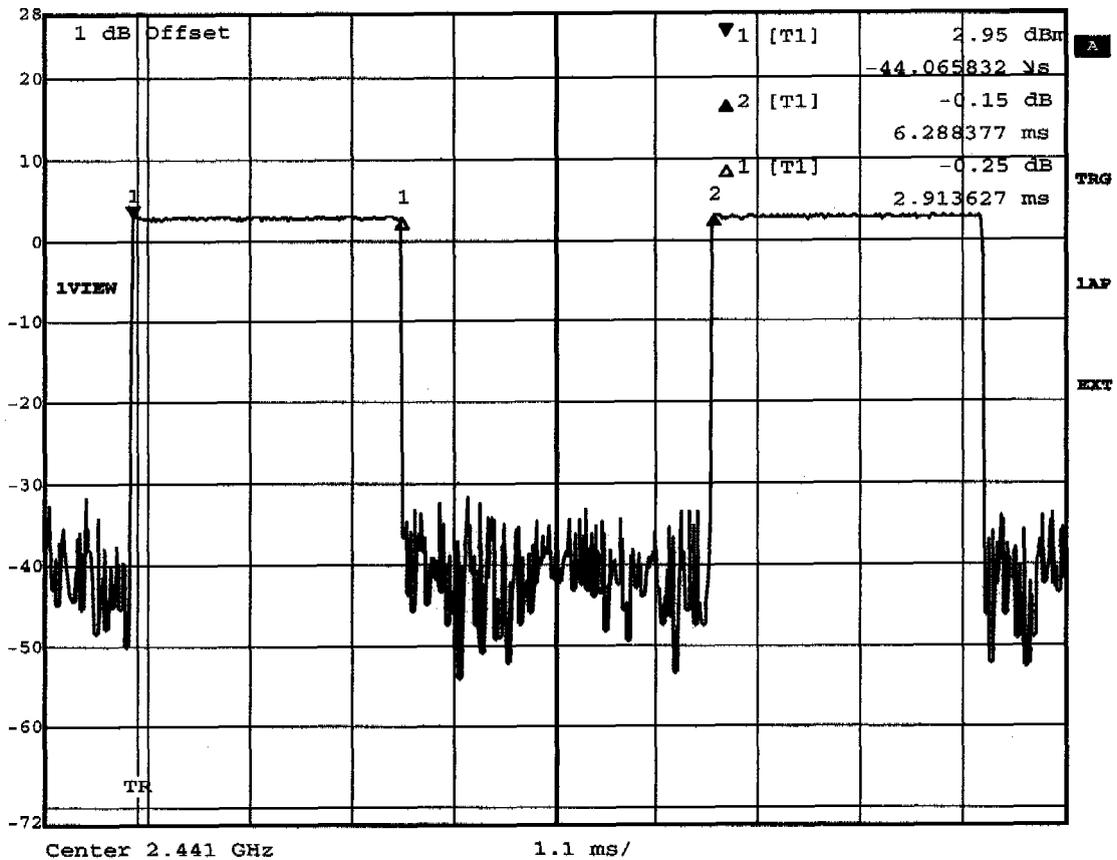

Title:      Duty Cycle  
Comment A: Jabra BT110  
Date:      29.JUL.2004 08:48:34




## Appendix H

20dB Bandwidth




Delta 1 [T1] RBW 10 kHz RF Att 40 dB  
Ref Lvl -0.71 dB VBW 10 kHz  
20 dBm 824.44889779 kHz SWT 56 ms Unit dBm

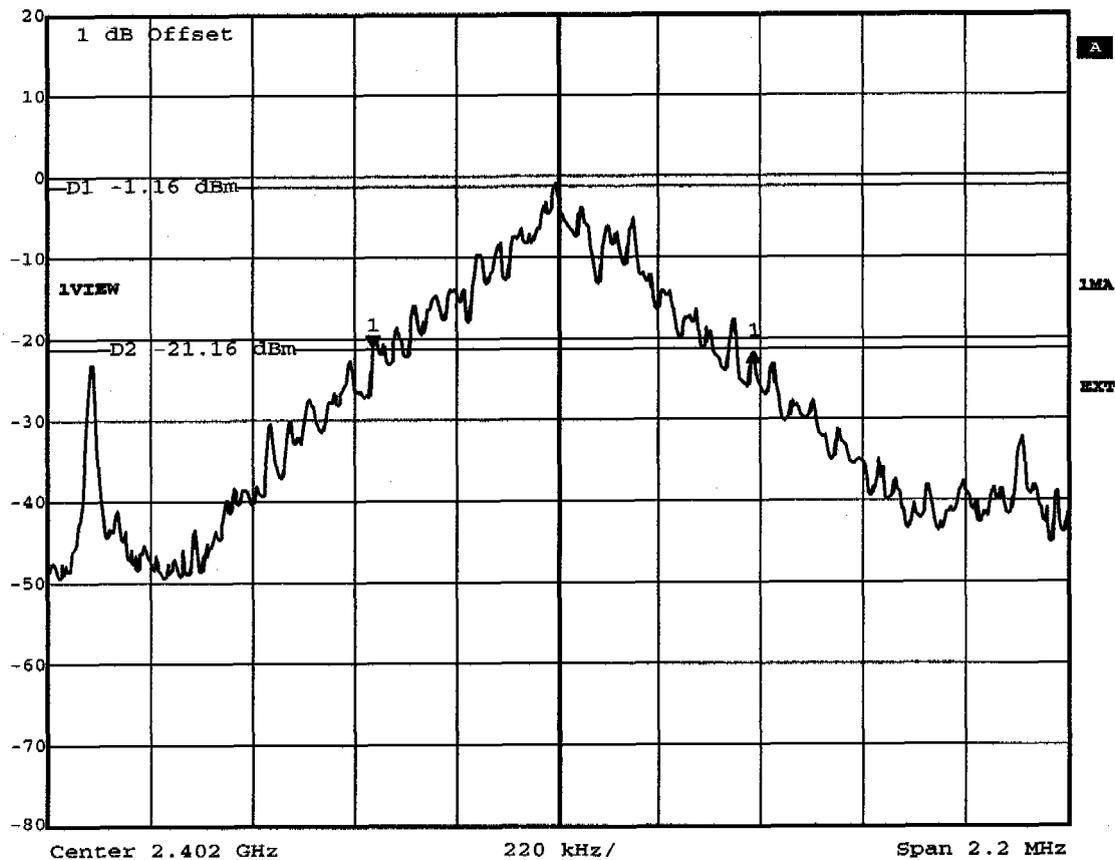

Title: -20dB Bandwidth Ch.: 0  
Comment A: Jabra BT110  
Date: 29.JUL.2004 08:44:40




Delta 1 [T1]      RBW    10 kHz    RF Att    40 dB  
Ref Lvl            -0.47 dB    VBW    10 kHz  
20 dBm            824.44889779 kHz    SWT    56 ms    Unit            dBm

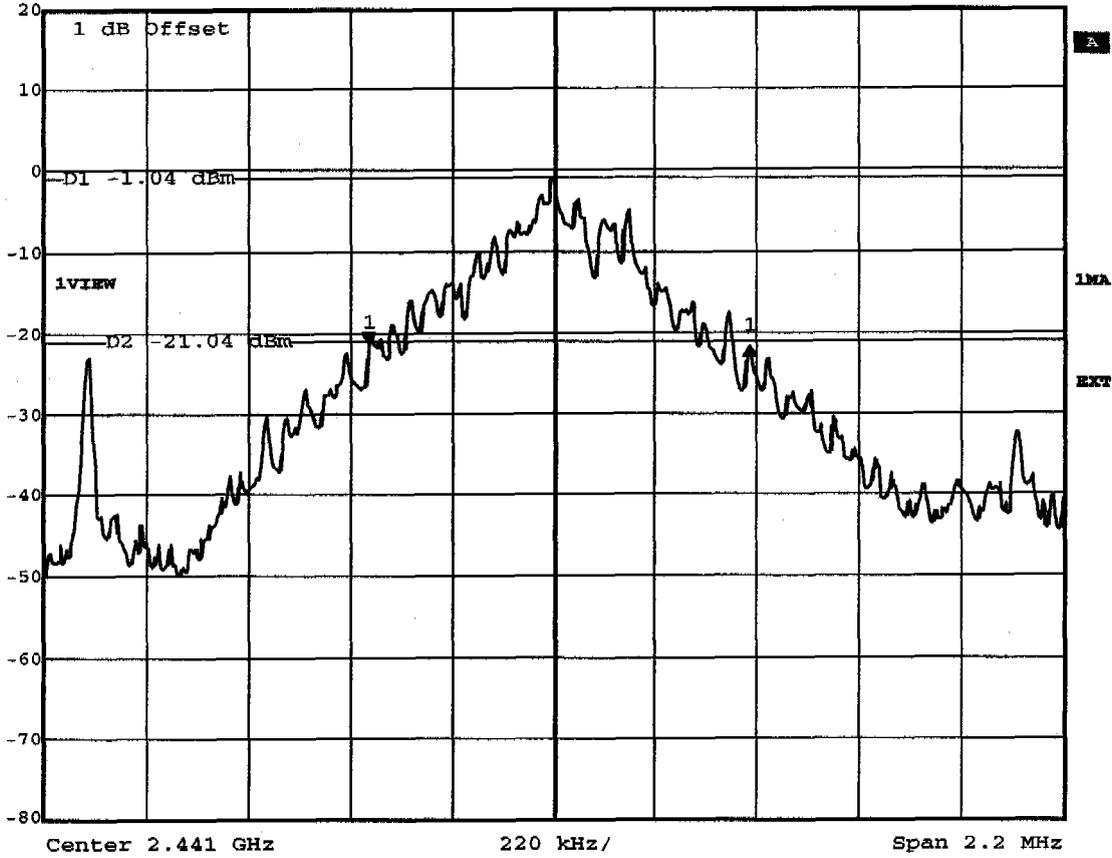

Title:      -20dB Bandwidth Ch.: 39  
Comment A: Jabra BT110  
Date:      29.JUL.2004 08:45:50



Delta 1 [T1]      RBW    10 kHz    RF Att    40 dB  
Ref Lvl            -0.77 dB    VEW    10 kHz  
20 dBm            824.44889780 kHz    SWT    56 ms    Unit        dBm

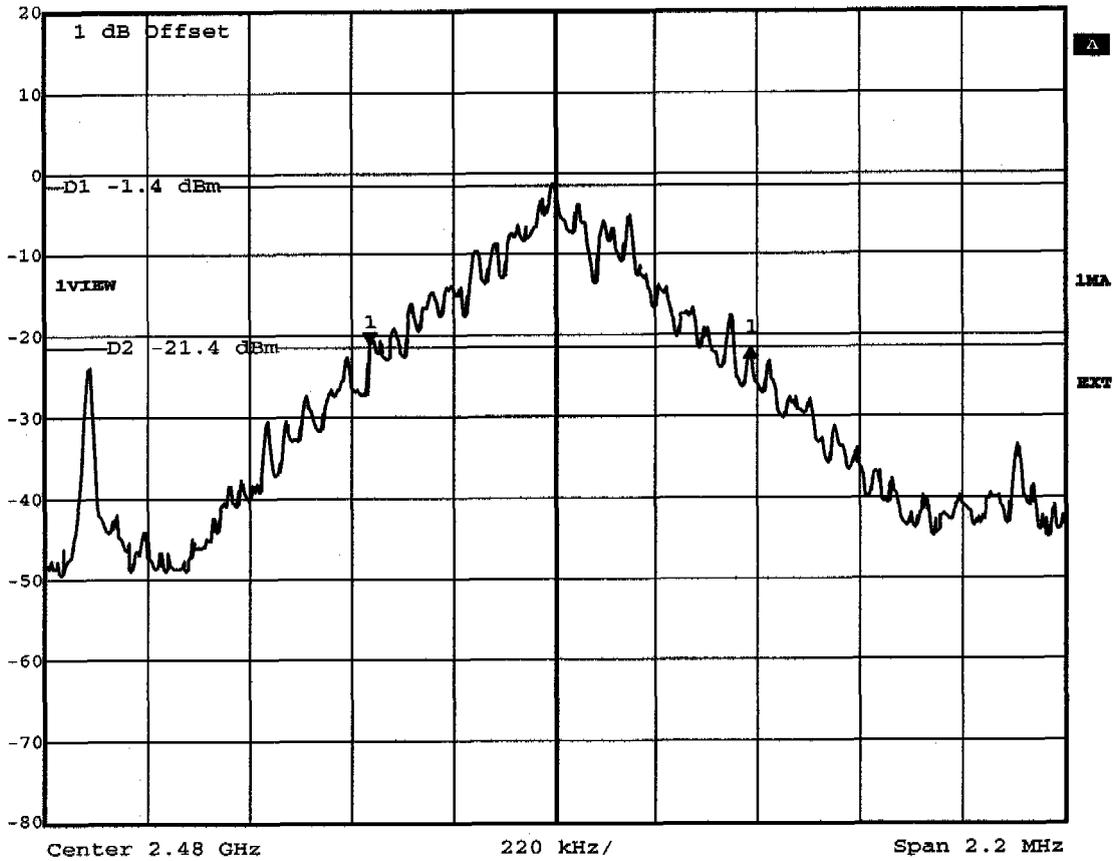

Title:        -20dB Bandwidth Ch.: 78  
Comment A:    Jabra BT110  
Date:        29.JUL.2004 08:41:44




## Appendix I

### Band-edge Compliance of RF Emissions




Delta 1 [T1]      RBW    50 kHz    RF Att    50 dB  
Ref Lvl            38.37 dB    VBW    50 kHz  
25 dBm            2.00300601 MHz    SWT    5 ms    Unit    dBm

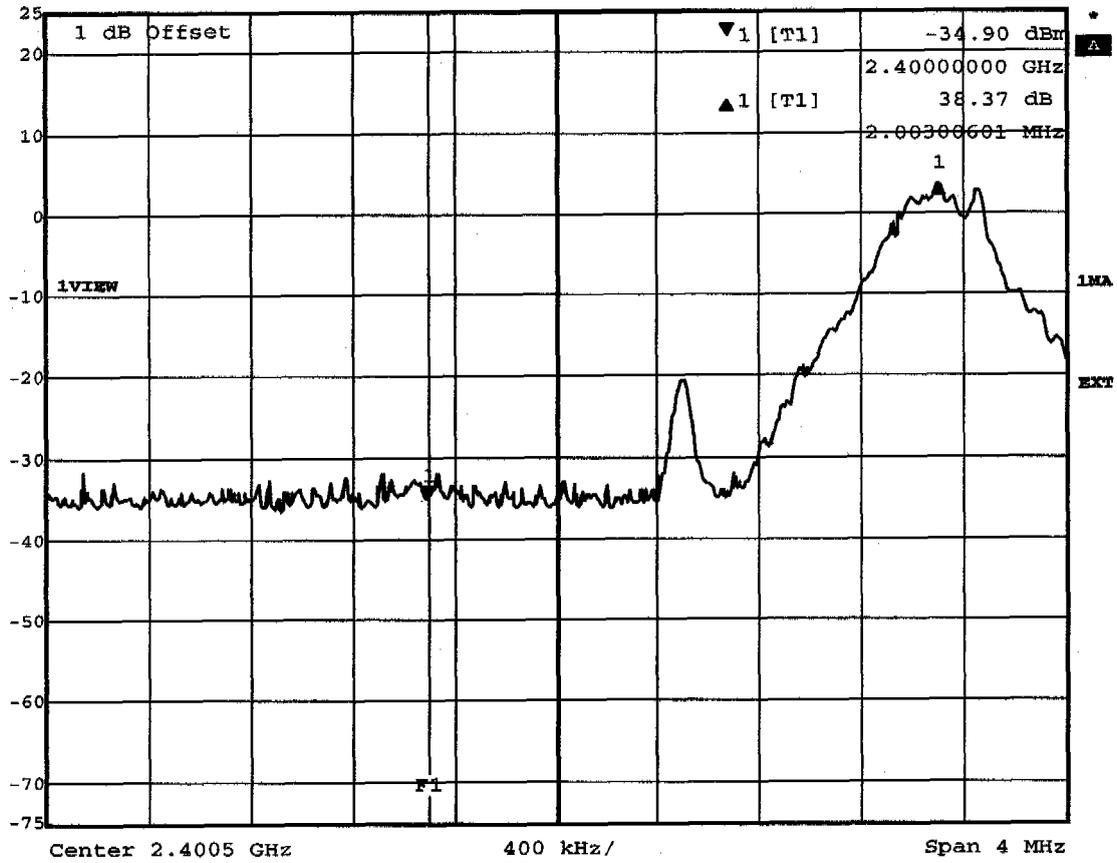

Title:      Band-edge Compliance (conducted, single frequency)  
Comment A: Jabra BT110  
Date:      29.JUL.2004 09:02:37



Delta 1 [T1]      RBW    50 kHz    RF Att    50 dB  
Ref Lvl            38.62 dB    VBW    50 kHz  
26 dBm            -3.49927856 MHz    SWT    5 ms    Unit            dBm

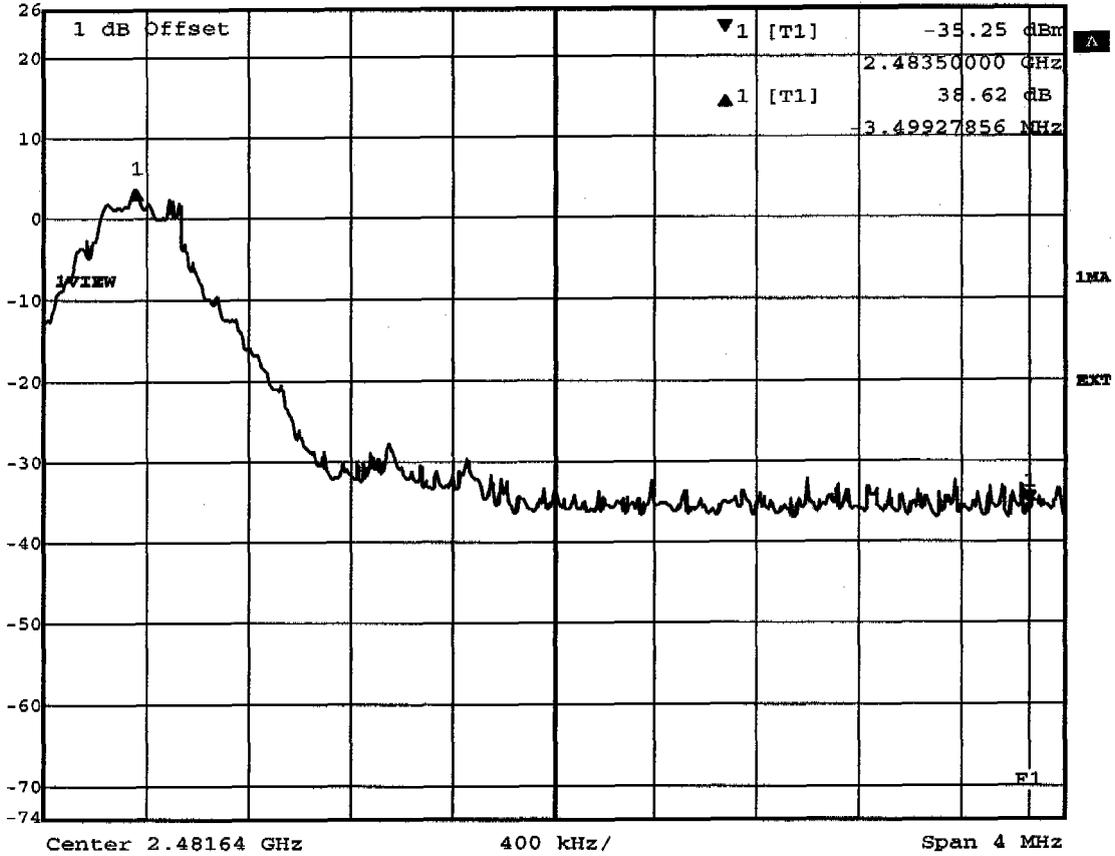


Title:      Band-edge Compliance (conducted, single frequency)

Comment A: Jabra BT110

Date:      29.JUL.2004 09:04:58




Delta 1 [T1] REW 50 kHz RF Att 50 dB  
Ref Lvl 35.87 dB VBW 50 kHz  
26 dBm 2.00124248 MHz SWT 5 ms Unit dBm

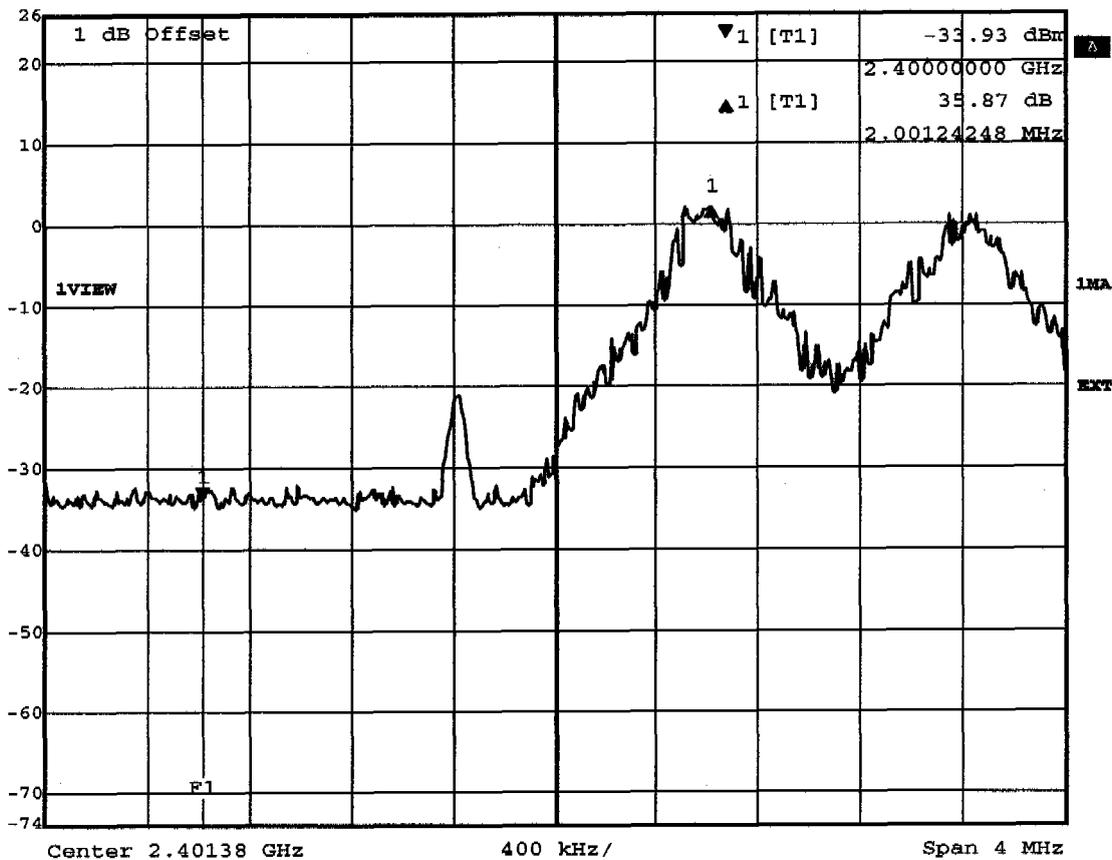

Title: Band-edge Compliance (conducted, hopping mode)  
Comment A: Jabra BT110  
Date: 29.JUL.2004 09:15:41



Delta 1 [T1] RBW 50 kHz RF Att 50 dB  
Ref Lvl 35.90 dB VBW 50 kHz  
26 dBm -3.55759519 MHz SWT 5 ms Unit dBm

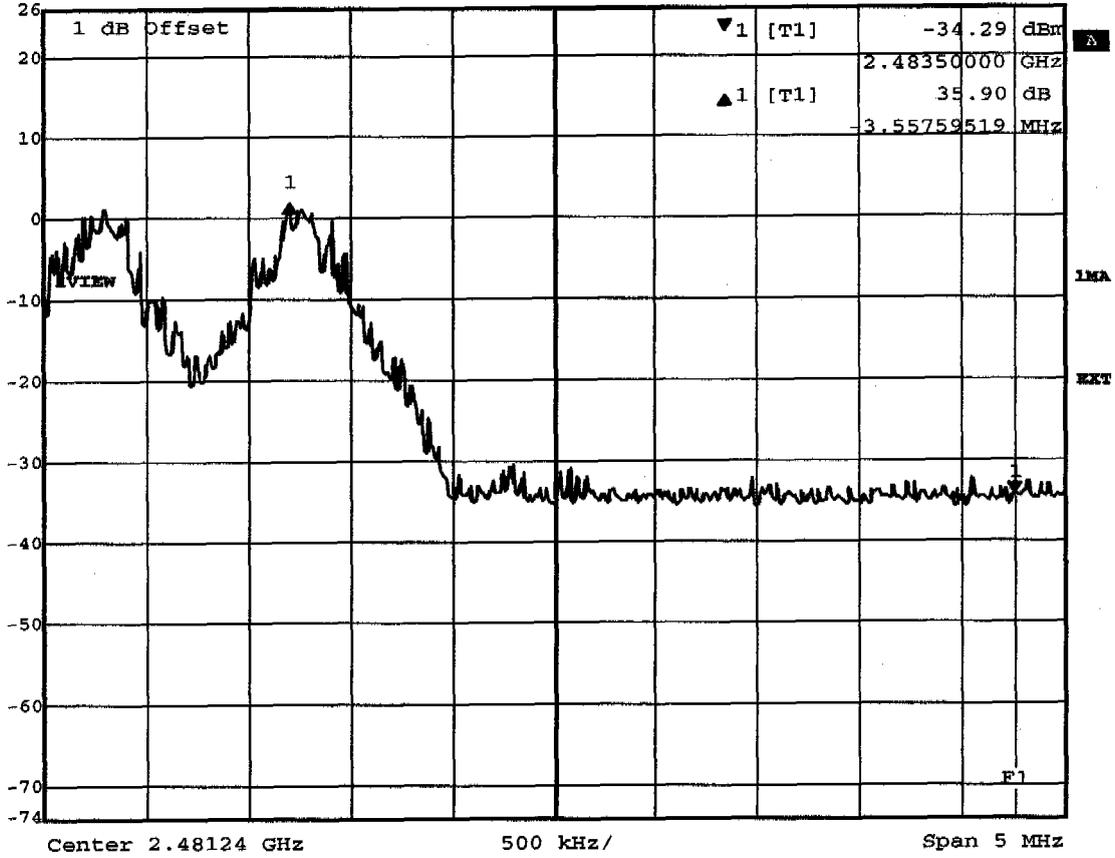

Title: Band-edge Compliance (conducted, hopping mode)  
Comment A: Jabra BT110  
Date: 29.JUL.2004 09:10:15



## Appendix J

Conducted Measurement at (AC) Power Line