




## Appendix B

Peak Output Power

**FCC part 15.247**  
**Peak output power conducted**

EUT	Jabra BT325S
Model	Bluetooth Headset
Approval Holder	GN Mobile
Temperature / Voltage	25°C / Unom 120 V AC (AC-DC adaptor)
Test Site / Operator	ETS
Test Specification	FCC part 15 section 247(b)
Test Case	Peak output power
Comment 1	Channel.: 0 / 2402 MHz
Comment 2	2.80 dBm

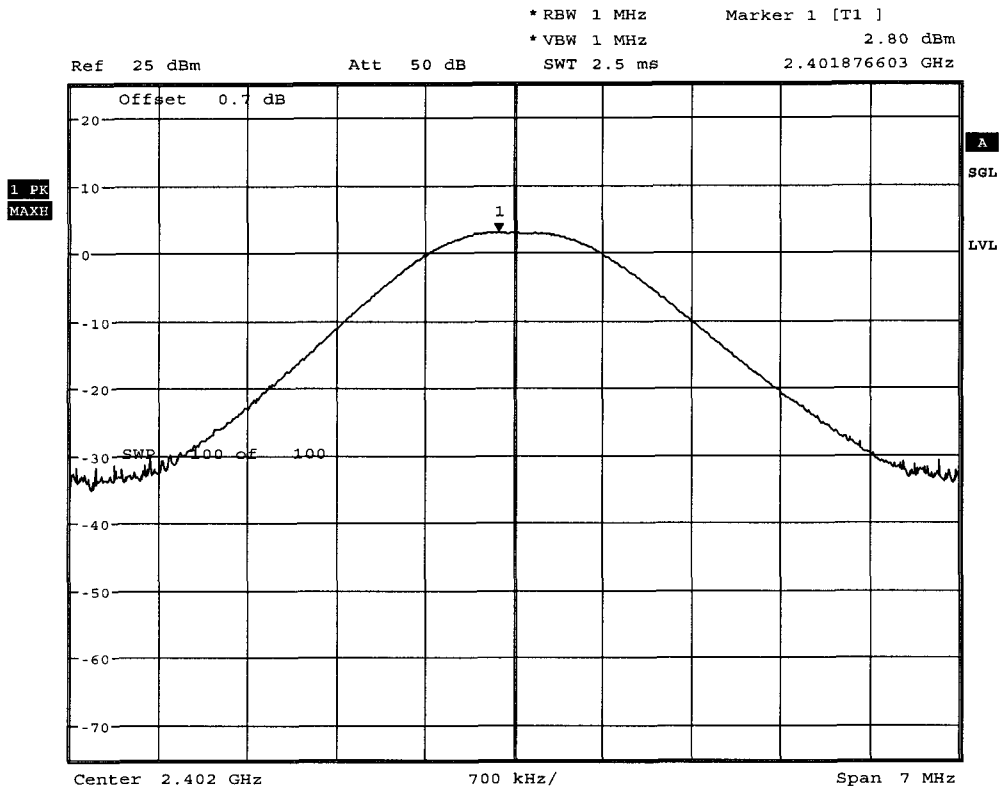

Date: 10.JAN.2006 18:13:15


Measurement diagram



**FCC part 15.247**

**Peak output power conducted**

EUT	Jabra BT325S
Model	Bluetooth Headset
Approval Holder	GN Mobile
Temperature / Voltage	25°C / Unom 120 V AC (AC-DC adaptor)
Test Site / Operator	ETS
Test Specification	FCC part 15 section 247(b)
Test Case	Peak output power
Comment 1	Channel.: 39 / 2441 MHz
Comment 2	2.74 dBm

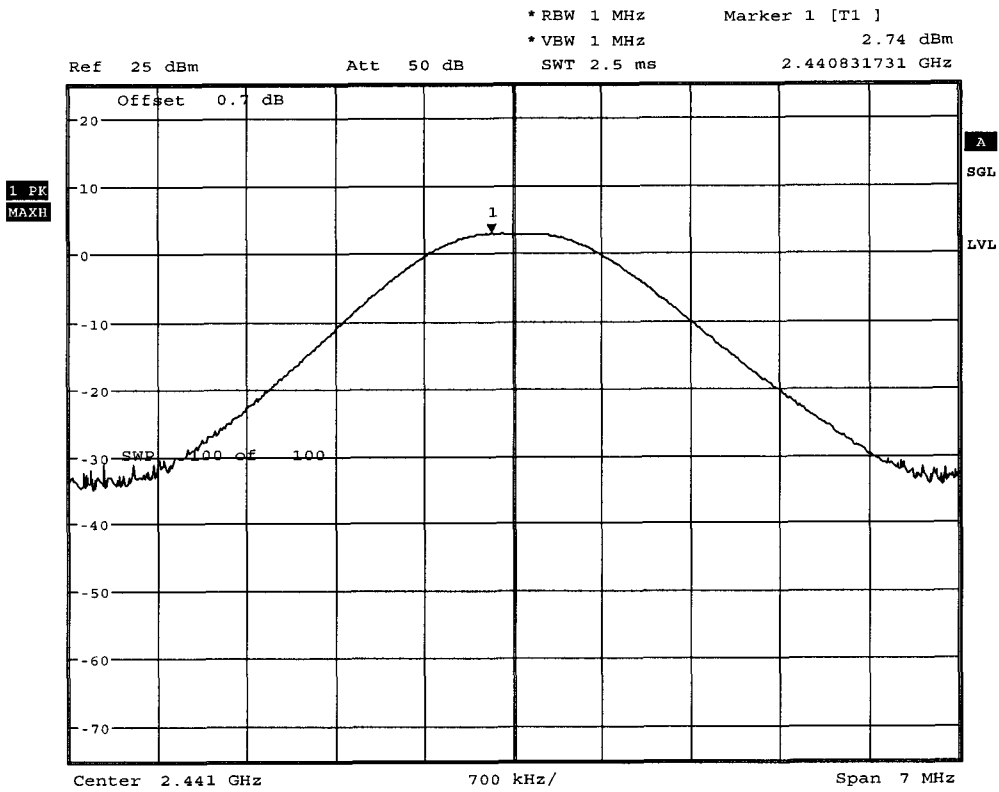


Date: 10.JAN.2006 18:19:27

Measurement diagram

**FCC part 15.247**

**Peak output power conducted**

EUT	Jabra BT325S
Model	Bluetooth Headset
Approval Holder	GN Mobile
Temperature / Voltage	25°C / Unom 120 V AC (AC-DC adaptor)
Test Site / Operator	ETS
Test Specification	FCC part 15 section 247(b)
Test Case	Peak output power
Comment 1	Channel.: 78 / 2480 MHz
Comment 2	2.36 dBm

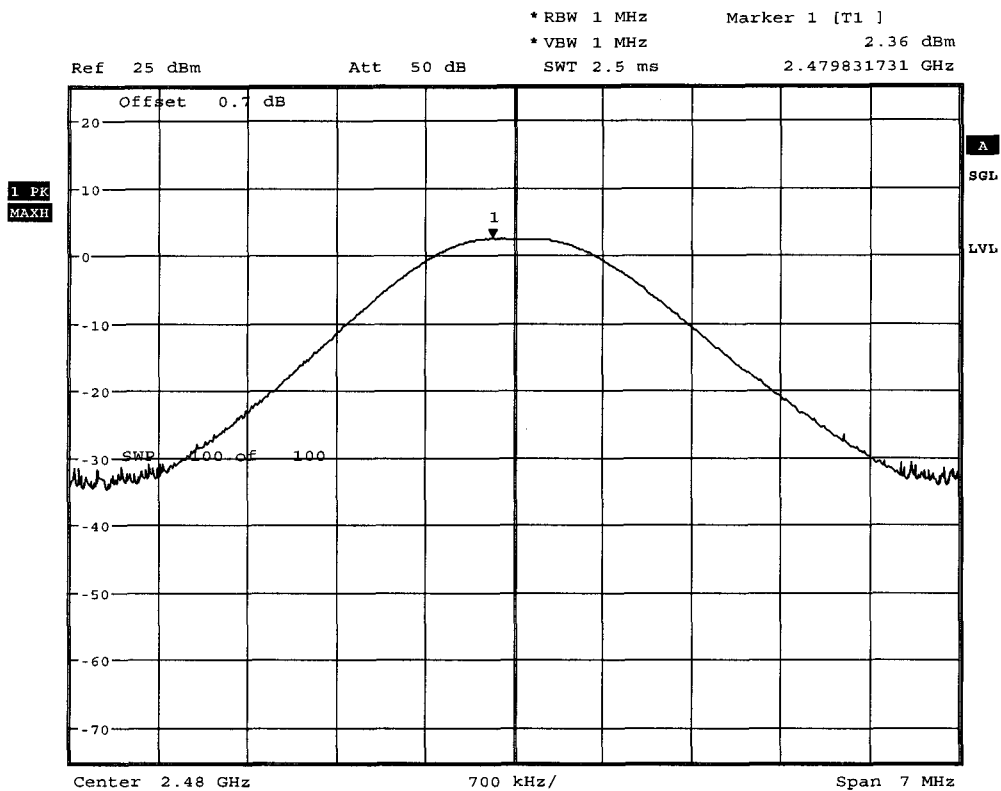

Date: 10.JAN.2006 18:24:16


Measurement diagram



**FCC part 15.247**

**Peak output power conducted**

EUT	Jabra BT325S
Model	Bluetooth Headset
Approval Holder	GN Mobile
Temperature / Voltage	25°C / Unom -15%
Test Site / Operator	ETS
Test Specification	FCC part 15 section 247(b)
Test Case	Peak output power
Comment 1	Channel.: 0 / 2402 MHz
Comment 2	2.88 dBm

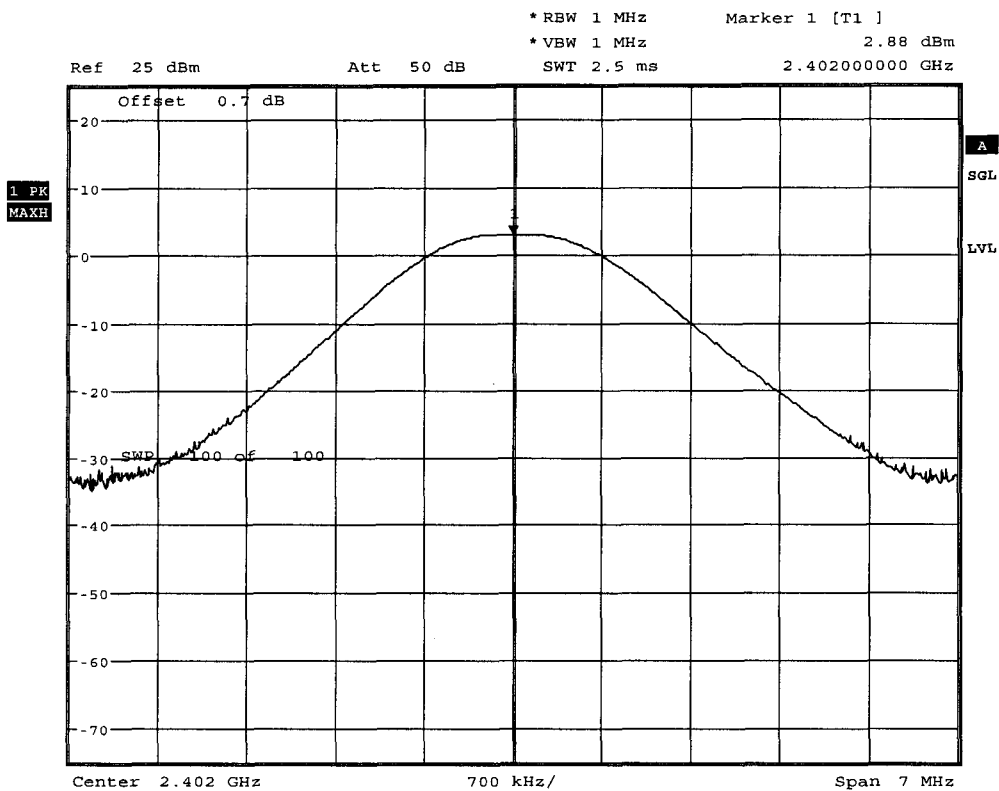


Date: 10.JAN.2006 18:28:00

Measurement diagram

**FCC part 15.247**

**Peak output power conducted**

EUT	Jabra BT325S
Model	Bluetooth Headset
Approval Holder	GN Mobile
Temperature / Voltage	25°C / Unom -15%
Test Site / Operator	ETS
Test Specification	FCC part 15 section 247(b)
Test Case	Peak output power
Comment 1	Channel.: 39 / 2441 MHz
Comment 2	2.75 dBm

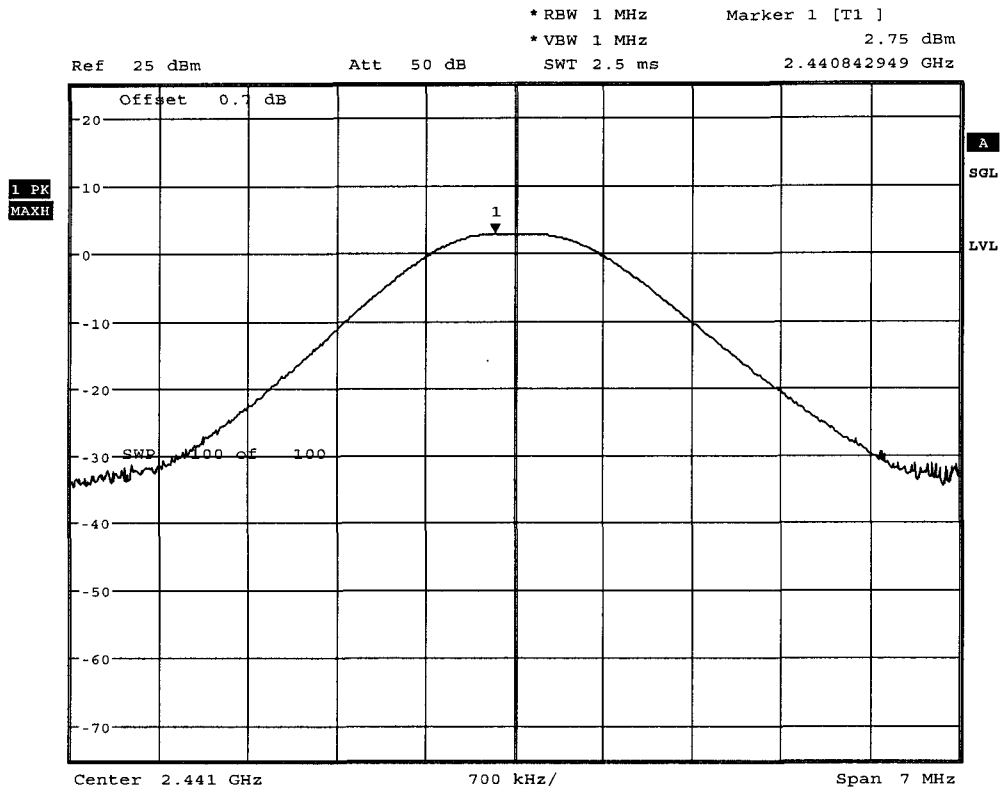


Date: 10.JAN.2006 18:32:01

Measurement diagram

**FCC part 15.247**

**Peak output power conducted**

EUT	Jabra BT325S
Model	Bluetooth Headset
Approval Holder	GN Mobile
Temperature / Voltage	25°C / Unom -15%
Test Site / Operator	ETS
Test Specification	FCC part 15 section 247(b)
Test Case	Peak output power
Comment 1	Channel.: 78 / 2480 MHz
Comment 2	2.89 dBm

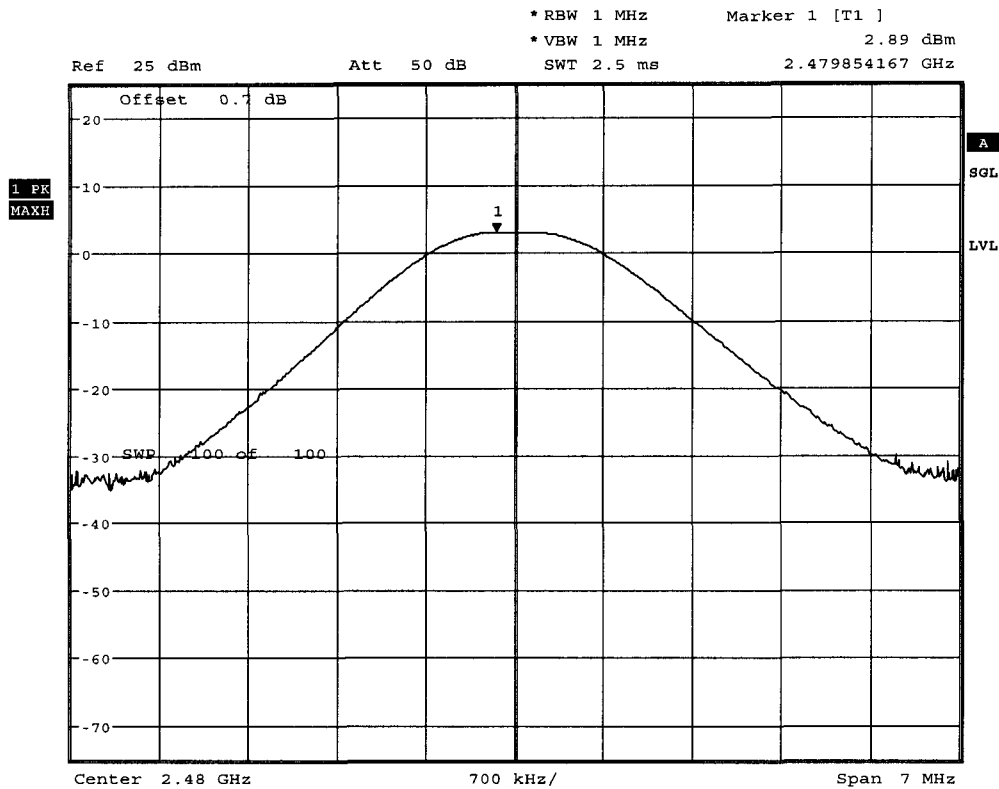


Date: 10.JAN.2006 18:35:40

Measurement diagram



FCC part 15.247  
Peak output power conducted

EUT	Jabra BT325S
Model	Bluetooth Headset
Approval Holder	GN Mobile
Temperature / Voltage	25°C / Unom +15%
Test Site / Operator	ETS
Test Specification	FCC part 15 section 247(b)
Test Case	Peak output power
Comment 1	Channel.: 0 / 2402 MHz
Comment 2	2.84 dBm

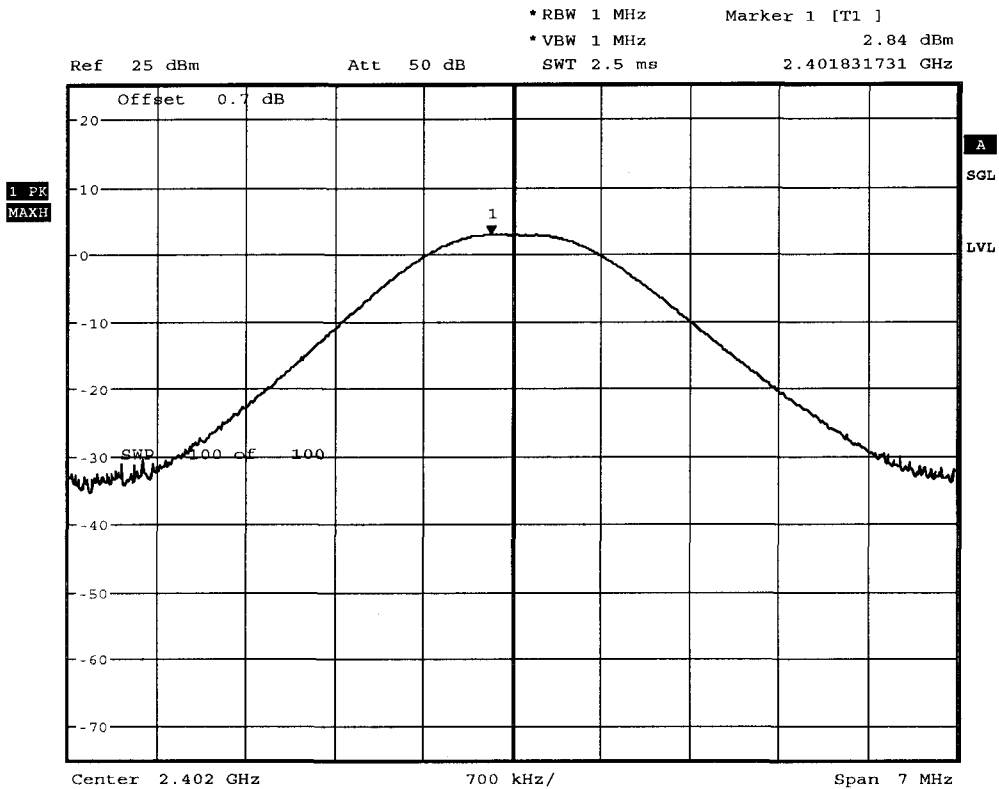

Date: 10.JAN.2006 18:30:02

Measurement diagram






**FCC part 15.247**

**Peak output power conducted**

EUT	Jabra BT325S
Model	Bluetooth Headset
Approval Holder	GN Mobile
Temperature / Voltage	25°C / Unom +15%
Test Site / Operator	ETS
Test Specification	FCC part 15 section 247(b)
Test Case	Peak output power
Comment 1	Channel.: 39 / 2441 MHz
Comment 2	2.72 dBm

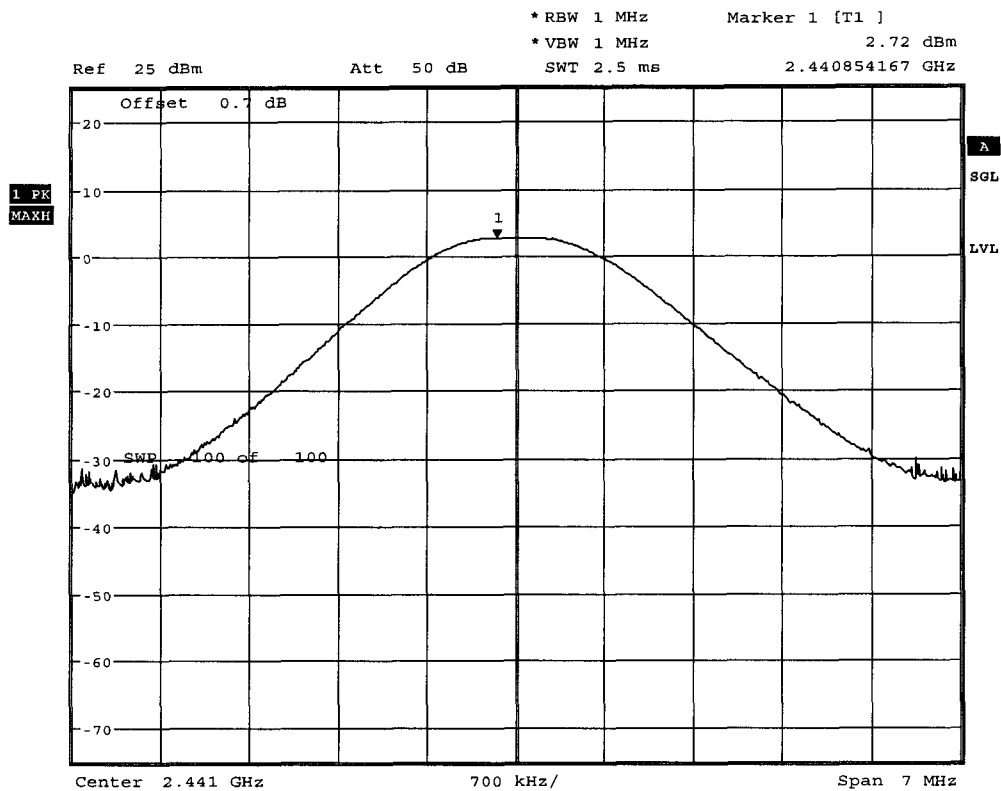


Date: 10.JAN.2006 18:33:52

Measurement diagram



**FCC part 15.247  
Peak output power conducted**

EUT	Jabra BT325S
Model	Bluetooth Headset
Approval Holder	GN Mobile
Temperature / Voltage	25°C / Unom +15%
Test Site / Operator	ETS
Test Specification	FCC part 15 section 247(b)
Test Case	Peak output power
Comment 1	Channel.: 78 / 2480 MHz
Comment 2	2.34 dBm

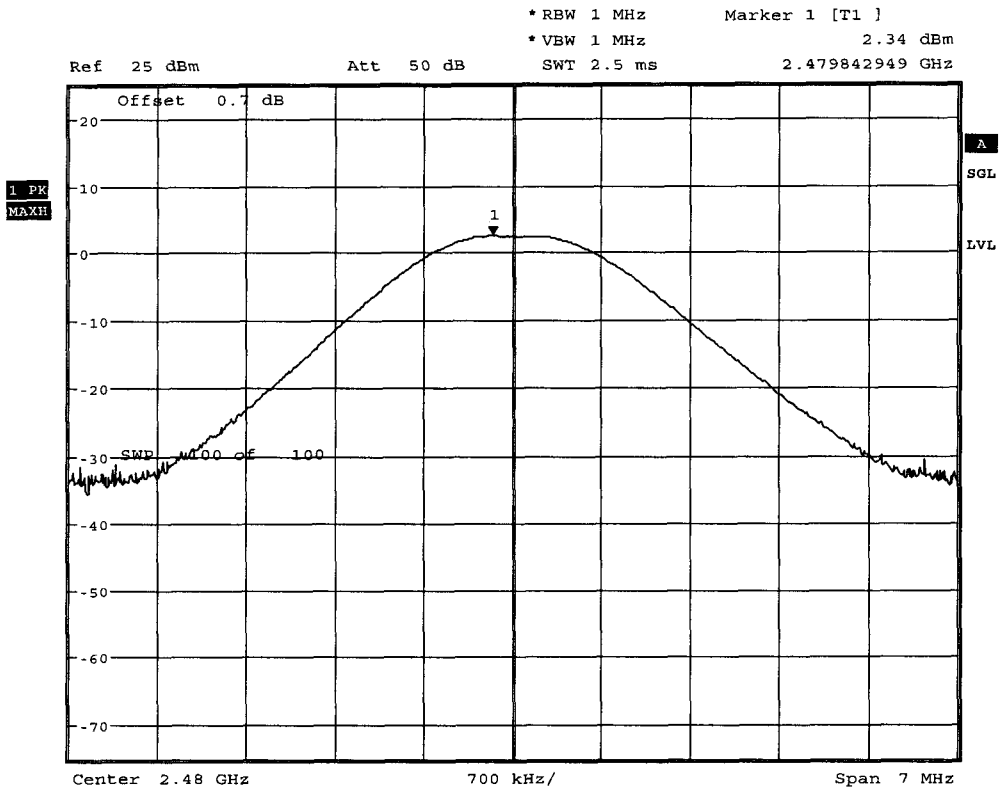

Date: 10.JAN.2006 18:41:04

Measurement diagram




## Appendix C

Spurious Emissions radiated - Transmitter operating

**Carrier power (Field Strength)**

**FCC RULES PART 15, SUBPART C**


Approval Holder: GN Netcom  
EUT / Model: Bluetooth Headset / BT325S  
Frequency: 2402 MHz  
Test Site / Operator: ETS / Mr. Cersovsky  
Temperature/ Voltage: 25°C / Unom: 3,7 V -  
Test Specification: according to S15.247  
Comment 1: Dist.: 3m, Ant.: BBHA9120D  
Comment 2: Freq: 2.402GHz, Emax: 96.52dBµV/m, REW: 100kHz

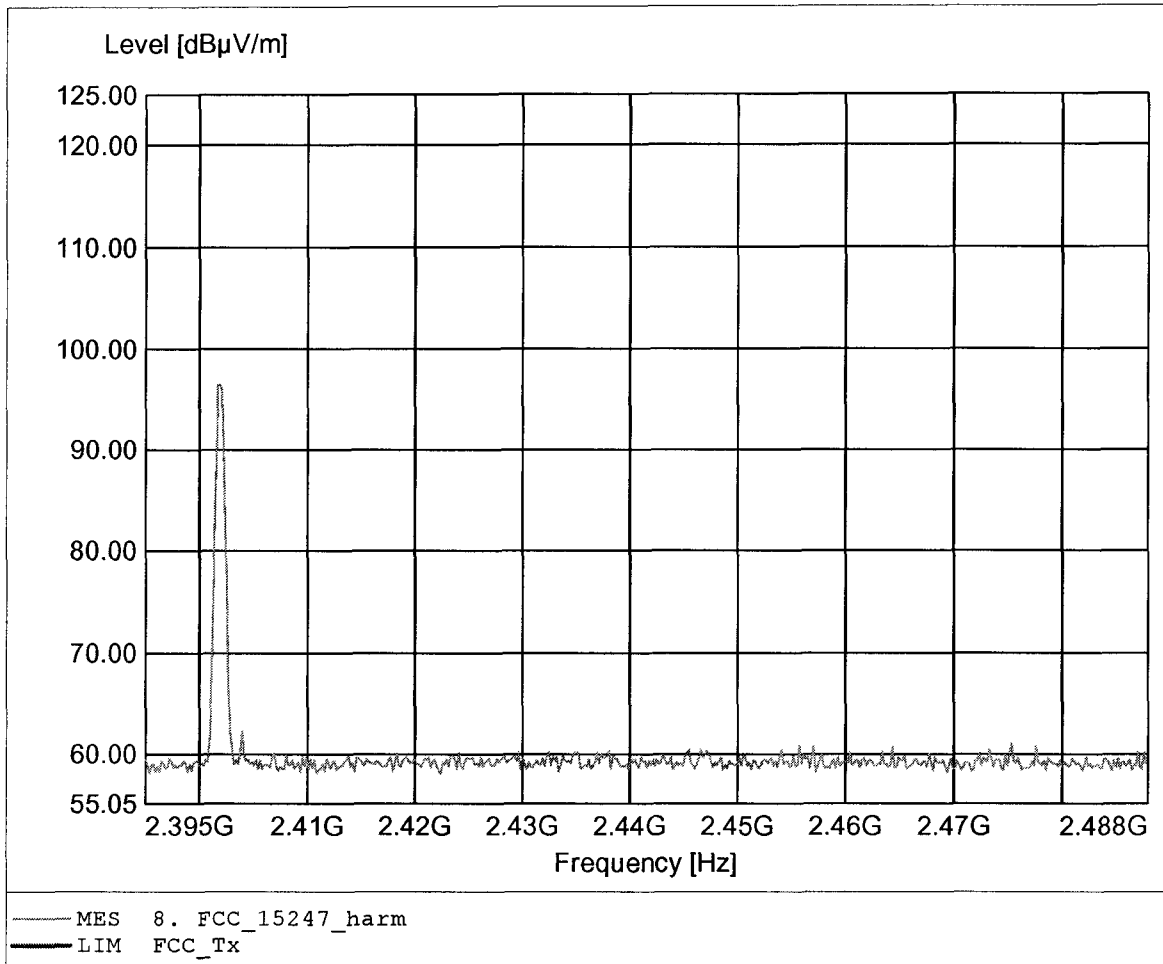

**Carrier power (Field Strength)**

**FCC RULES PART 15, SUBPART C**


Approval Holder: GN Netcom  
EUT / Model: Bluetooth Headset / BT325S  
Frequency: 2402 MHz  
Test Site / Operator: ETS / Mr. Cersovsky  
Temperature/ Voltage: 25°C / Unom: 3,7 V -  
Test Specification: according to S15.247  
Comment 1: Dist.: 3m, Ant.: BBHA9120D  
Comment 2: Freq: 2.402GHz, Emax: 91.75dBµV/m, RBW: 100kHz

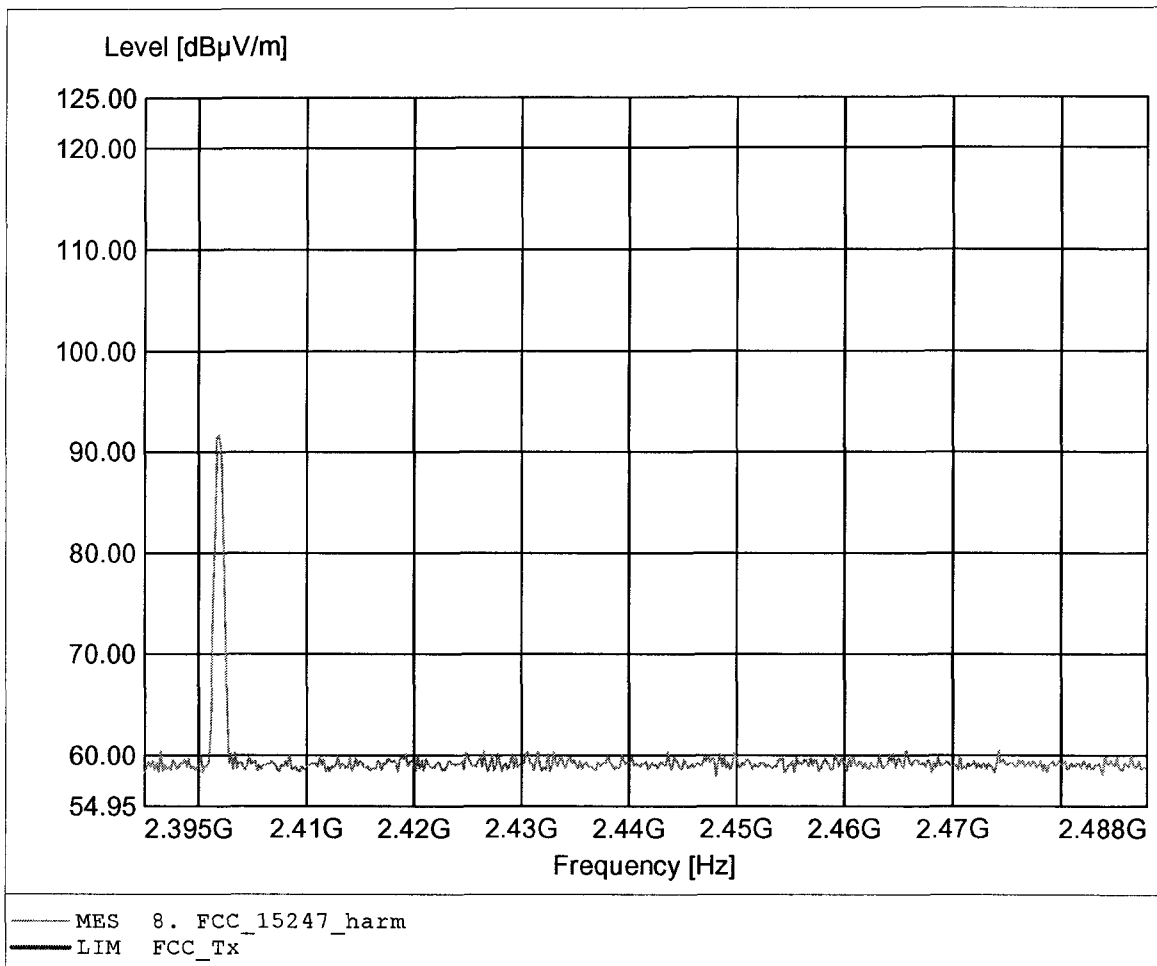

**Spurious emissions Field Strength**

**FCC RULES PART 15, SUBPART C**


Approval Holder: GN Netcom  
EUT / Model: Bluetooth Headset / BT325S  
Frequency: 2402 MHz  
Test Site / Operator: ETS / Mr. Cersovsky  
Temperature/ Voltage: 25°C / Unom: 3,7 V -  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 198.637MHz, Emax: 31.81dBµV/m, RBW: 100kHz

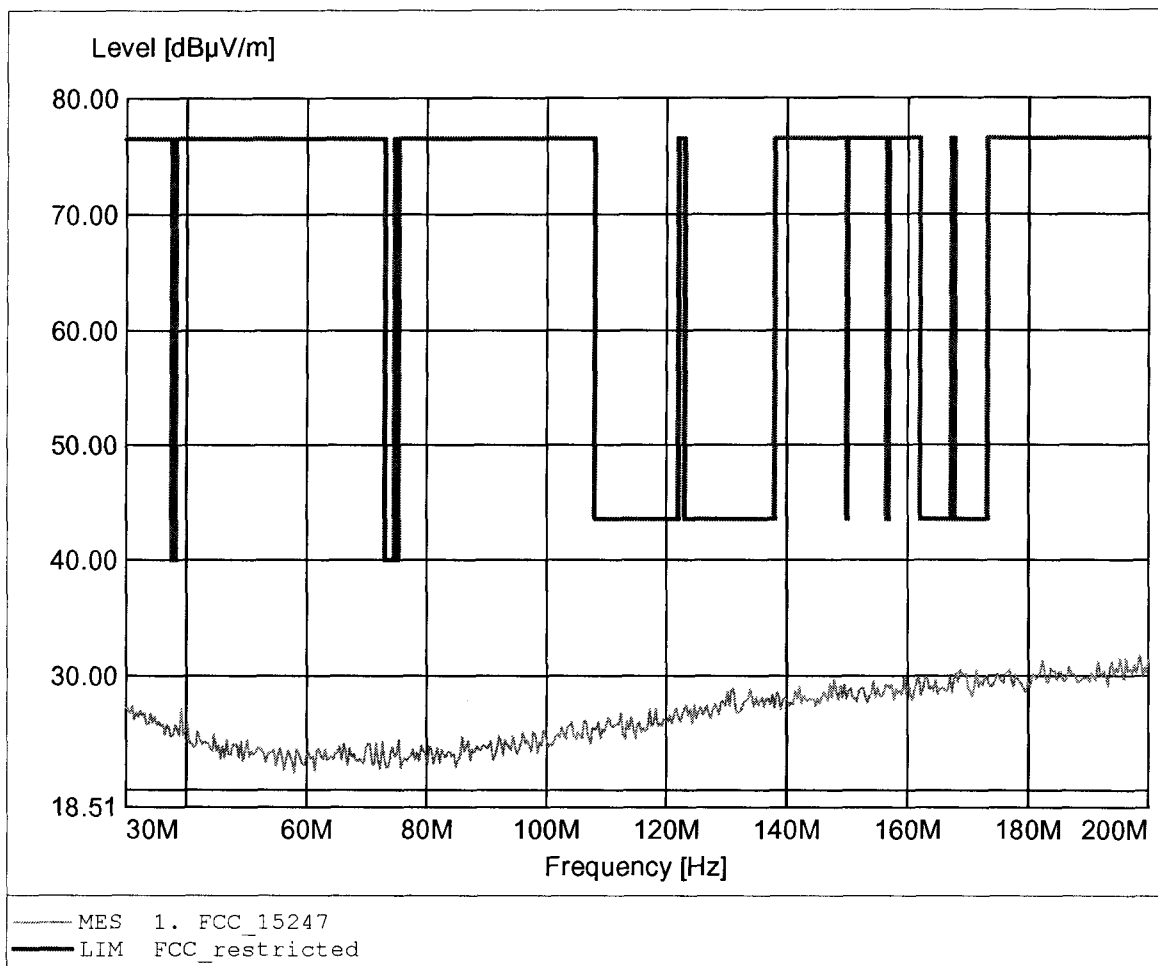

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom  
EUT / Model: Bluetooth Headset / BT325S  
Frequency: 2402 MHz  
Test Site / Operator: ETS / Mr. Cersovsky  
Temperature/ Voltage: 25°C / Unom: 3,7 V -  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 192.846MHz, Emax: 31.85dBµV/m, RBW: 100kHz

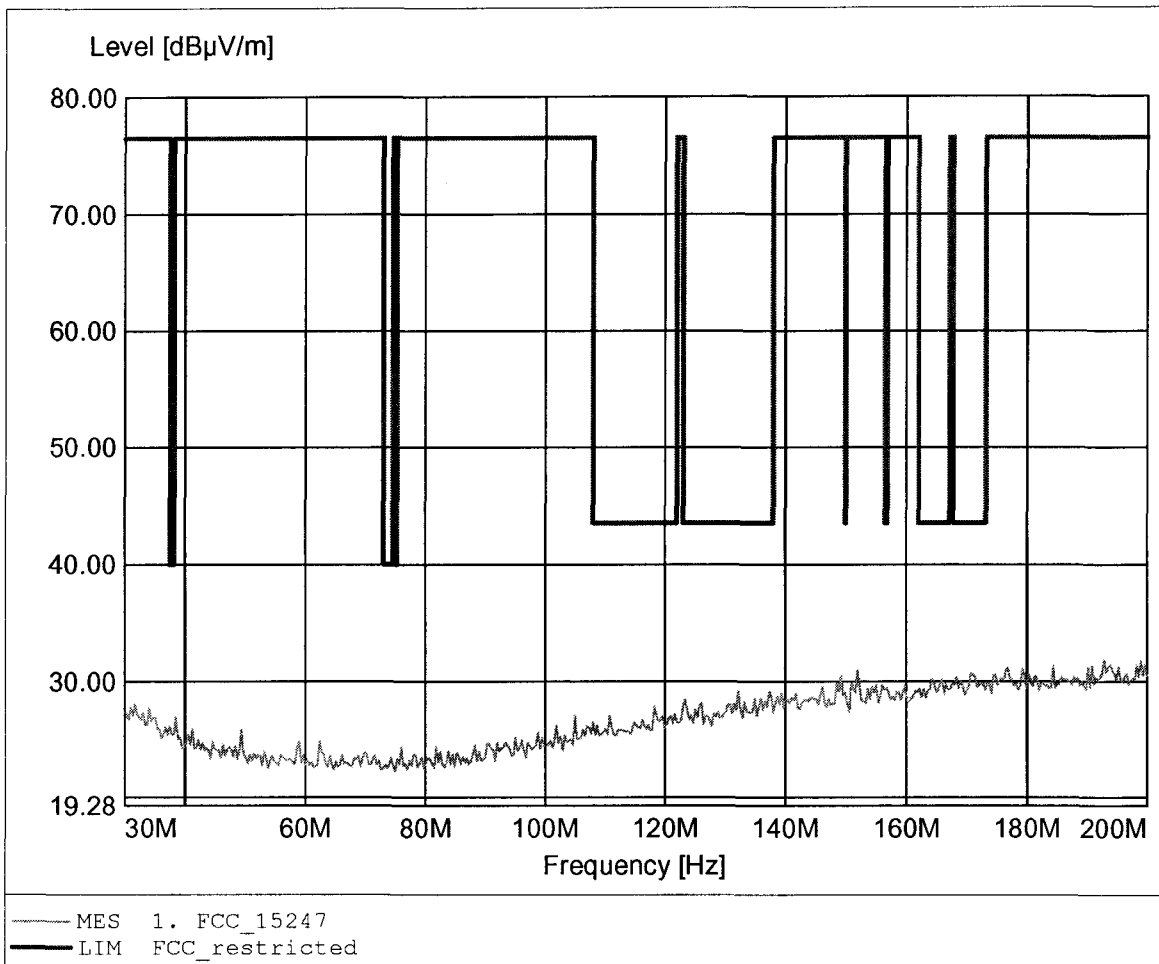

**Spurious emissions Field Strength**

**FCC RULES PART 15, SUBPART C**

Approval Holder: GN Netcom  
EUT / Model: Bluetooth Headset / BT325S  
Frequency: 2402 MHz  
Test Site / Operator: ETS / Mr. Cersovsky  
Temperature/ Voltage: 25°C / Unom: 3,7 V -  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Comment 2: Freq: 301.002MHz, Emax: 28.86dBµV/m, RBW: 100kHz

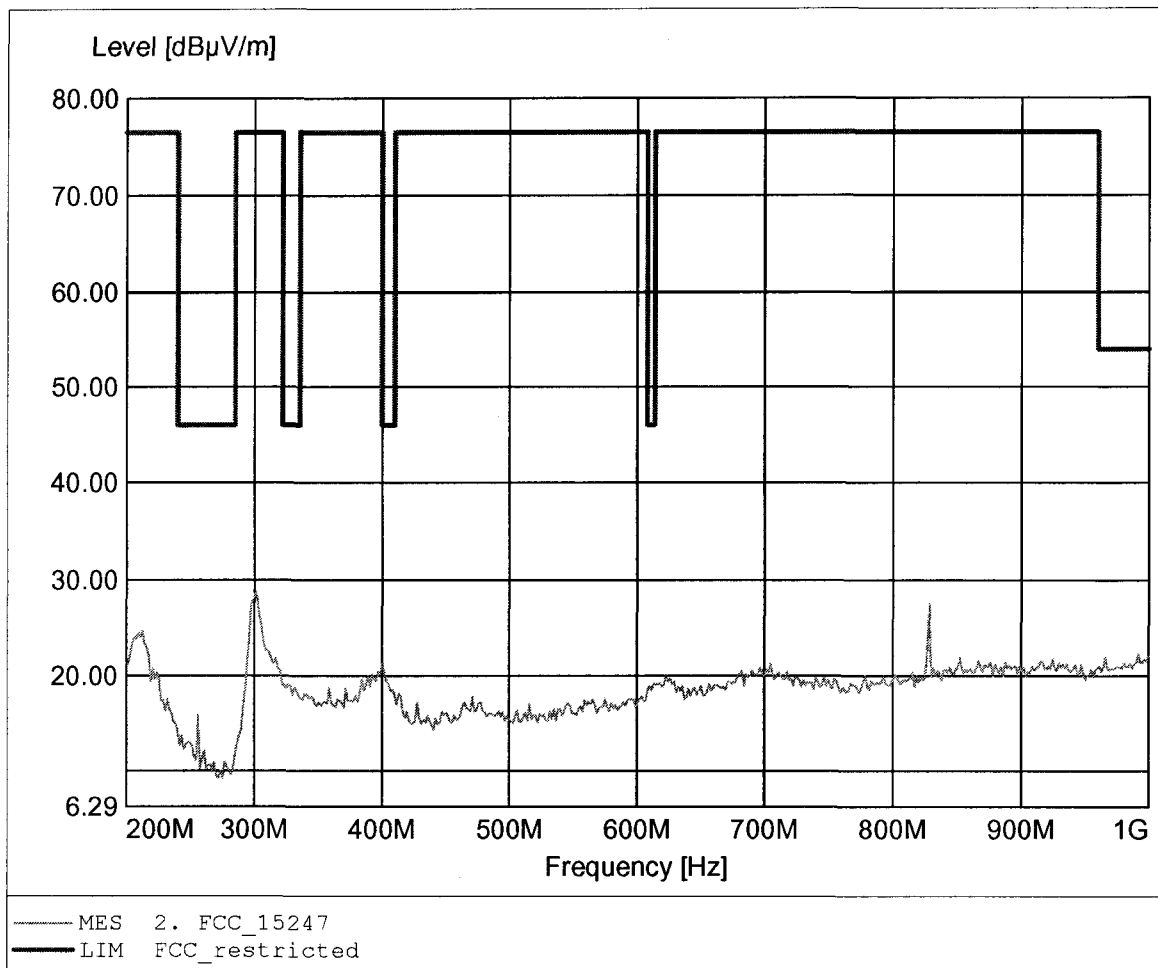




# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom  
EUT / Model: Bluetooth Headset / BT325S  
Frequency: 2402 MHz  
Test Site / Operator: ETS / Mr. Cersovsky  
Temperature/ Voltage: 25°C / Unom: 3,7 V -  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Comment 2: Freq: 301.002MHz, Emax: 26.66dBµV/m, RBW: 100kHz

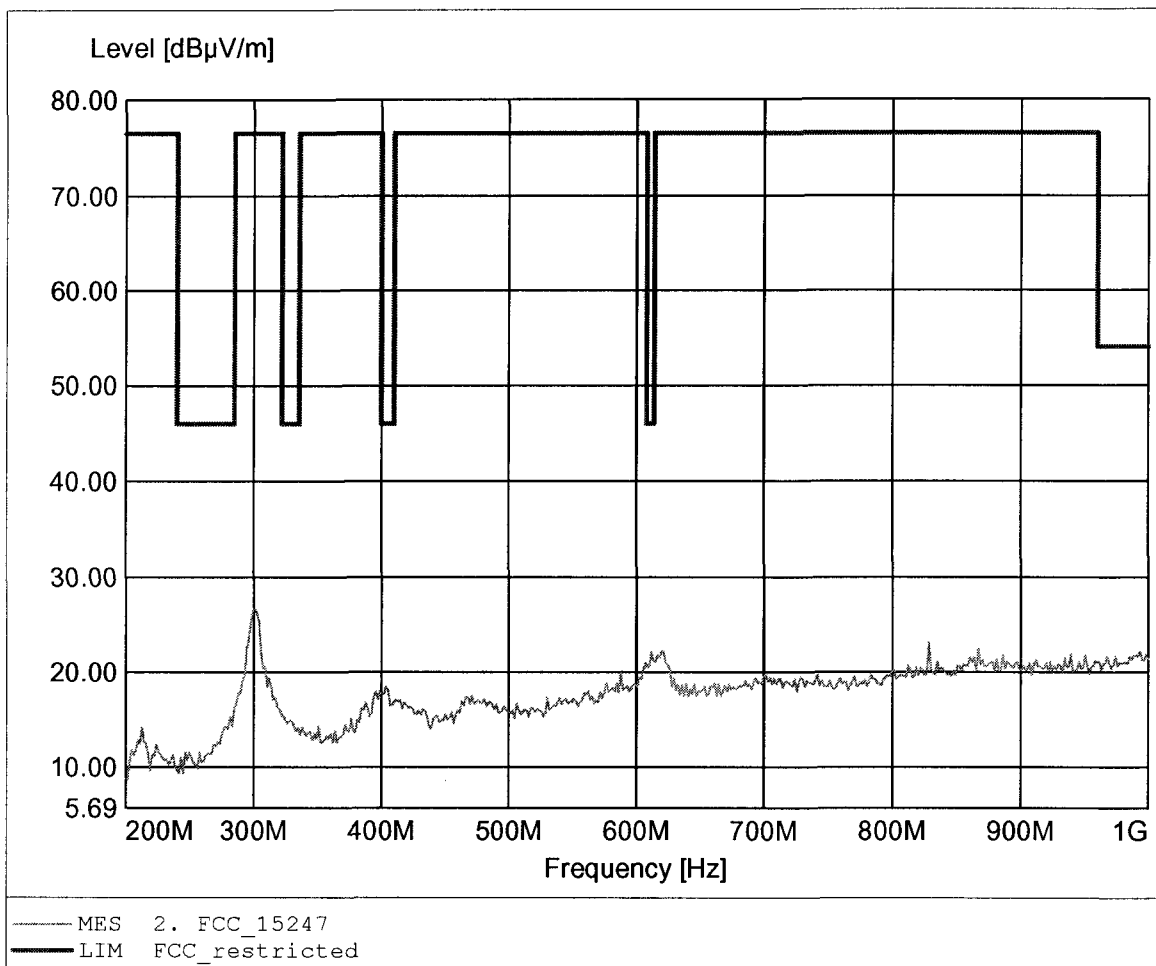

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom  
EUT / Model: Bluetooth Headset / BT325S  
Frequency: 2402 MHz  
Test Site / Operator: ETS / Mr. Cersovsky  
Temperature/ Voltage: 25°C / Unom: 3,7 V -  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.  
Comment 2: Freq: 2.400GHz, Emax: 72.42dBµV/m, REW: 1MHz

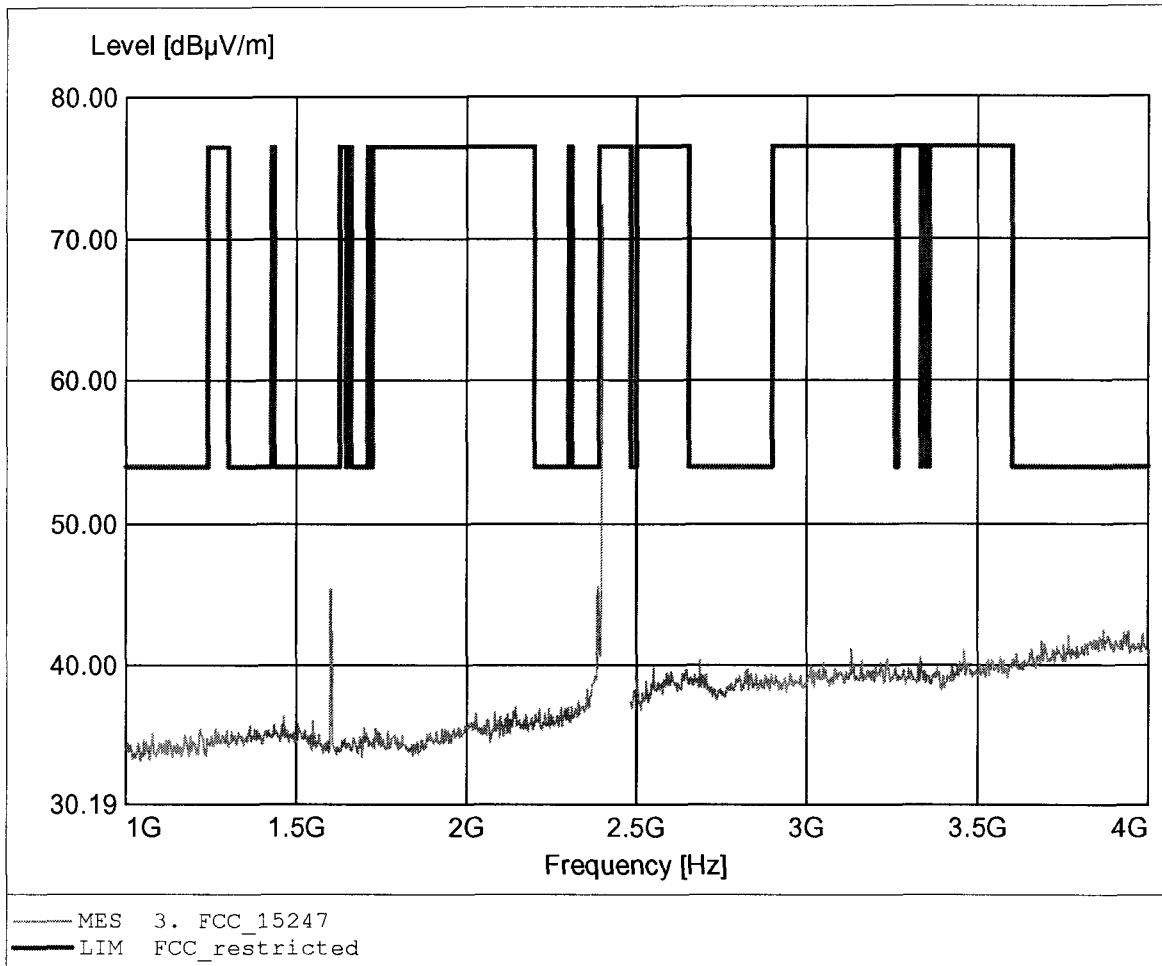

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom  
EUT / Model: Bluetooth Headset / BT325S  
Frequency: 2402 MHz  
Test Site / Operator: ETS / Mr. Cersovsky  
Temperature/ Voltage: 25°C / Unom: 3,7 V -  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.  
Comment 2: Freq: 1.603GHz, Emax: 42.06dBµV/m, REW: 1MHz

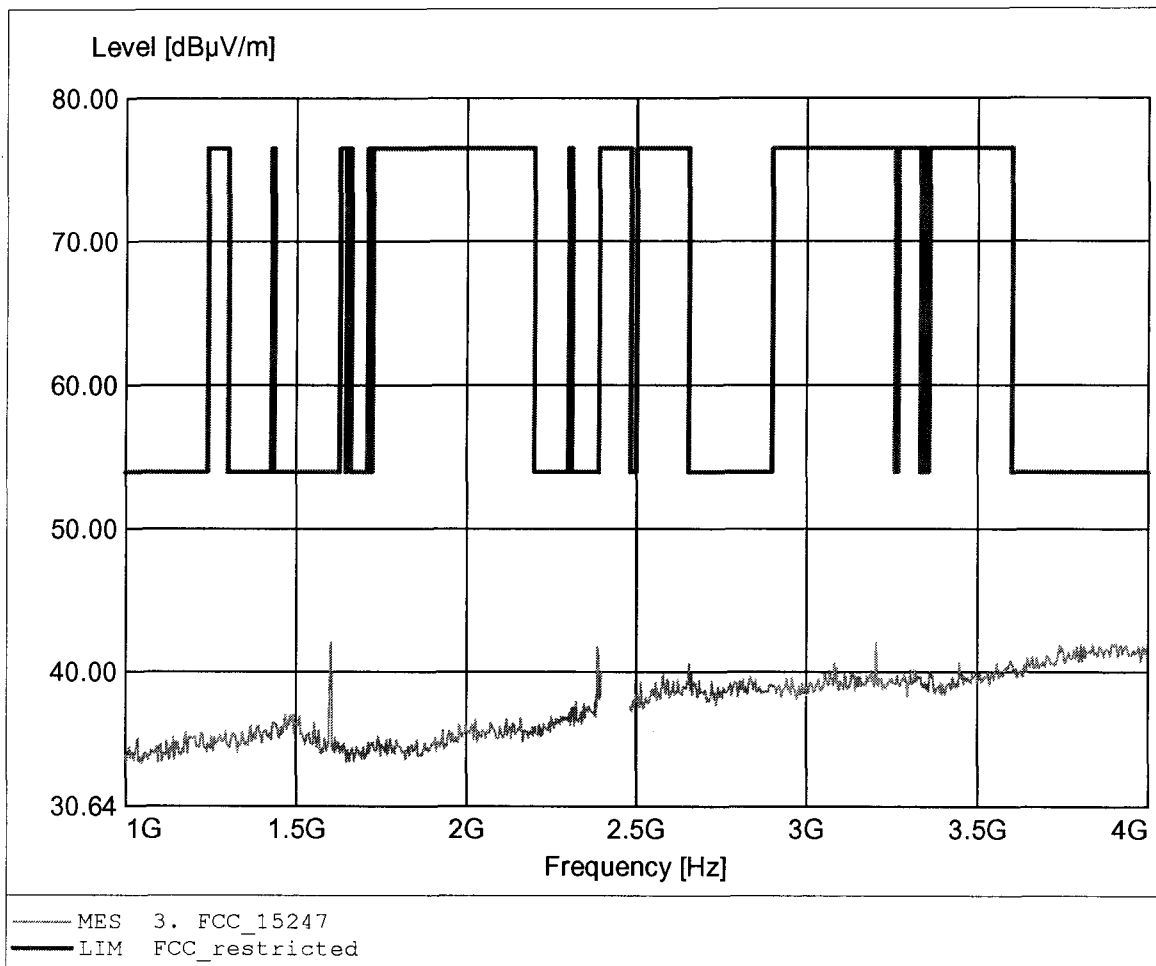

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom  
EUT / Model: Bluetooth Headset / BT325S  
Frequency: 2402 MHz  
Test Site / Operator: ETS / Mr. Cersovsky  
Temperature/ Voltage: 25°C / Unom: 3,7 V -  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 7.992GHz, Emax: 37.83dBµV/m, RBW: 1MHz

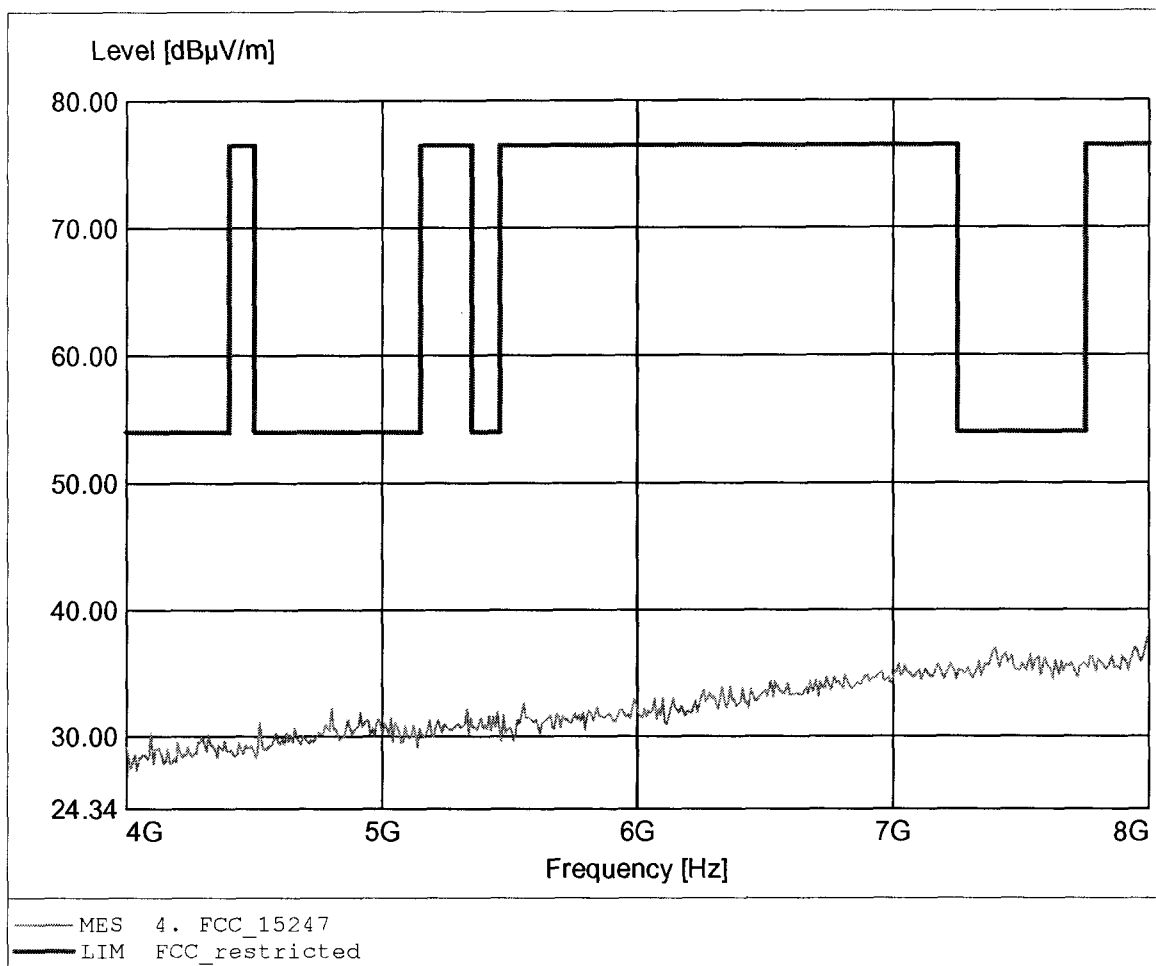

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom  
EUT / Model: Bluetooth Headset / BT325S  
Frequency: 2402 MHz  
Test Site / Operator: ETS / Mr. Cersovsky  
Temperature/ Voltage: 25°C / Unom: 3,7 V -  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 7.431GHz, Emax: 38.27dBµV/m, REW: 1MHz

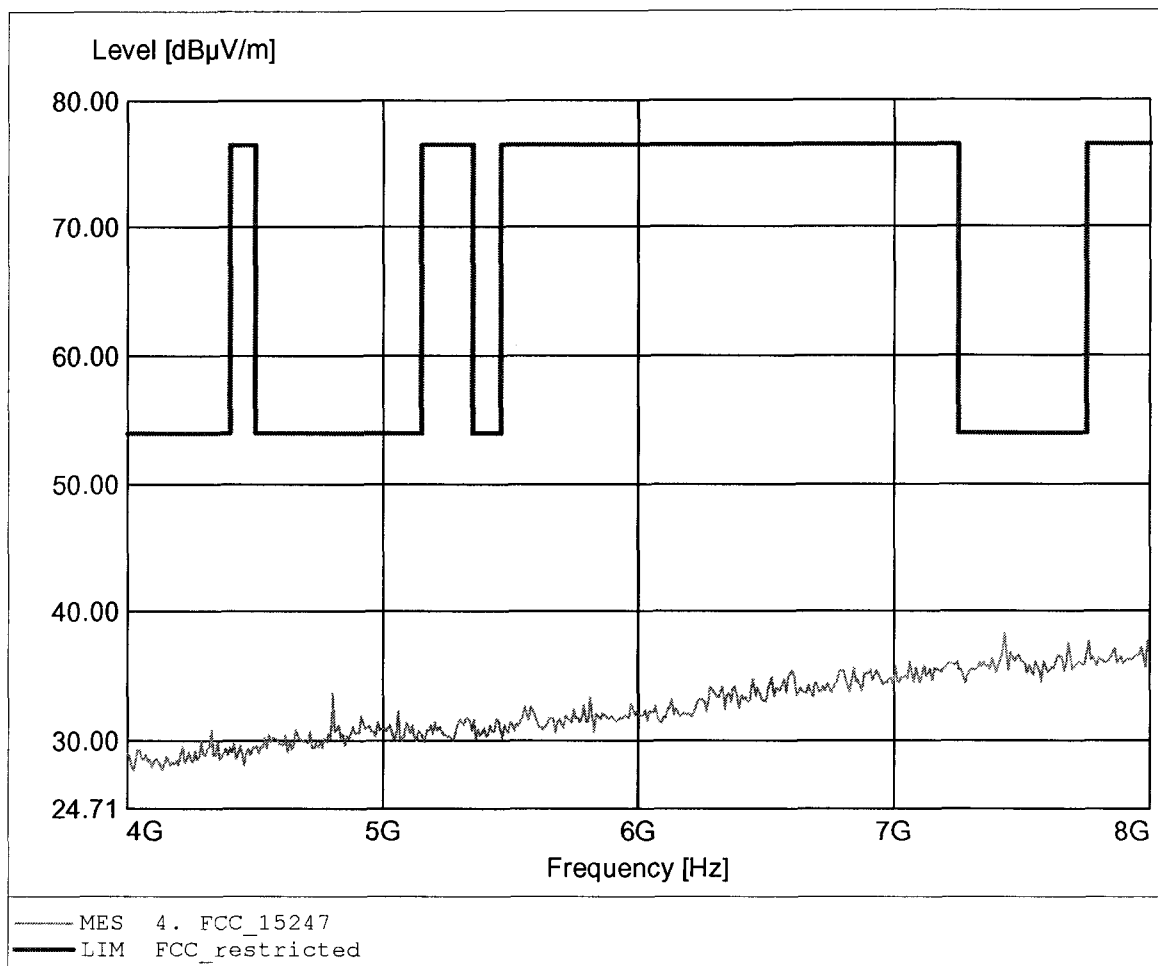

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom  
EUT / Model: Bluetooth Headset / BT325S  
Frequency: 2402 MHz  
Test Site / Operator: ETS / Mr. Cersovsky  
Temperature/ Voltage: 25°C / Unom: 3,7 V -  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 11.559GHz, Emax: 40.83dBµV/m, RBW: 1MHz

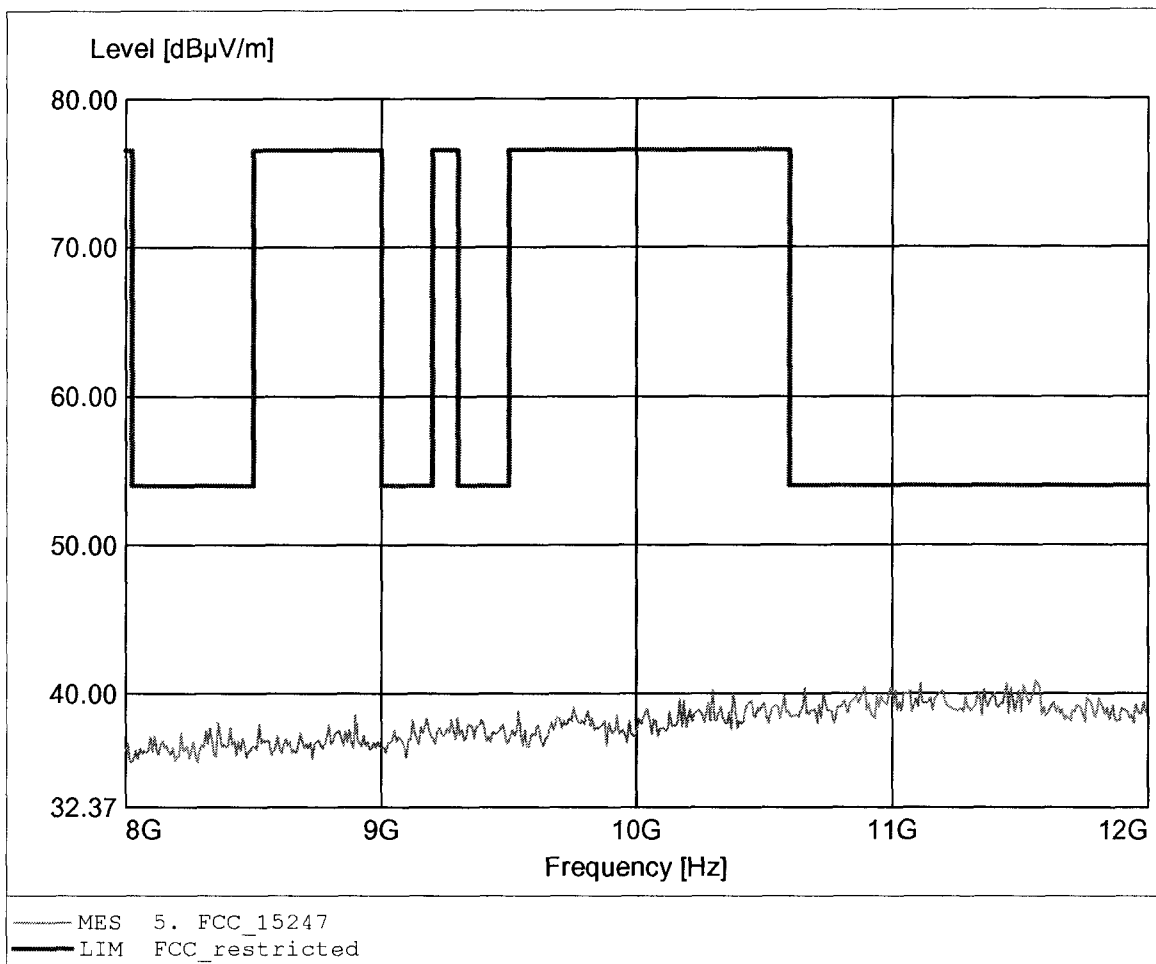

**Spurious emissions Field Strength**

**FCC RULES PART 15, SUBPART C**


Approval Holder: GN Netcom  
EUT / Model: Bluetooth Headset / BT325S  
Frequency: 2402 MHz  
Test Site / Operator: ETS / Mr. Cersovsky  
Temperature/ Voltage: 25°C / Unom: 3,7 V -  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 11.118GHz, Emax: 40.22dBuV/m, RBW: 1MHz

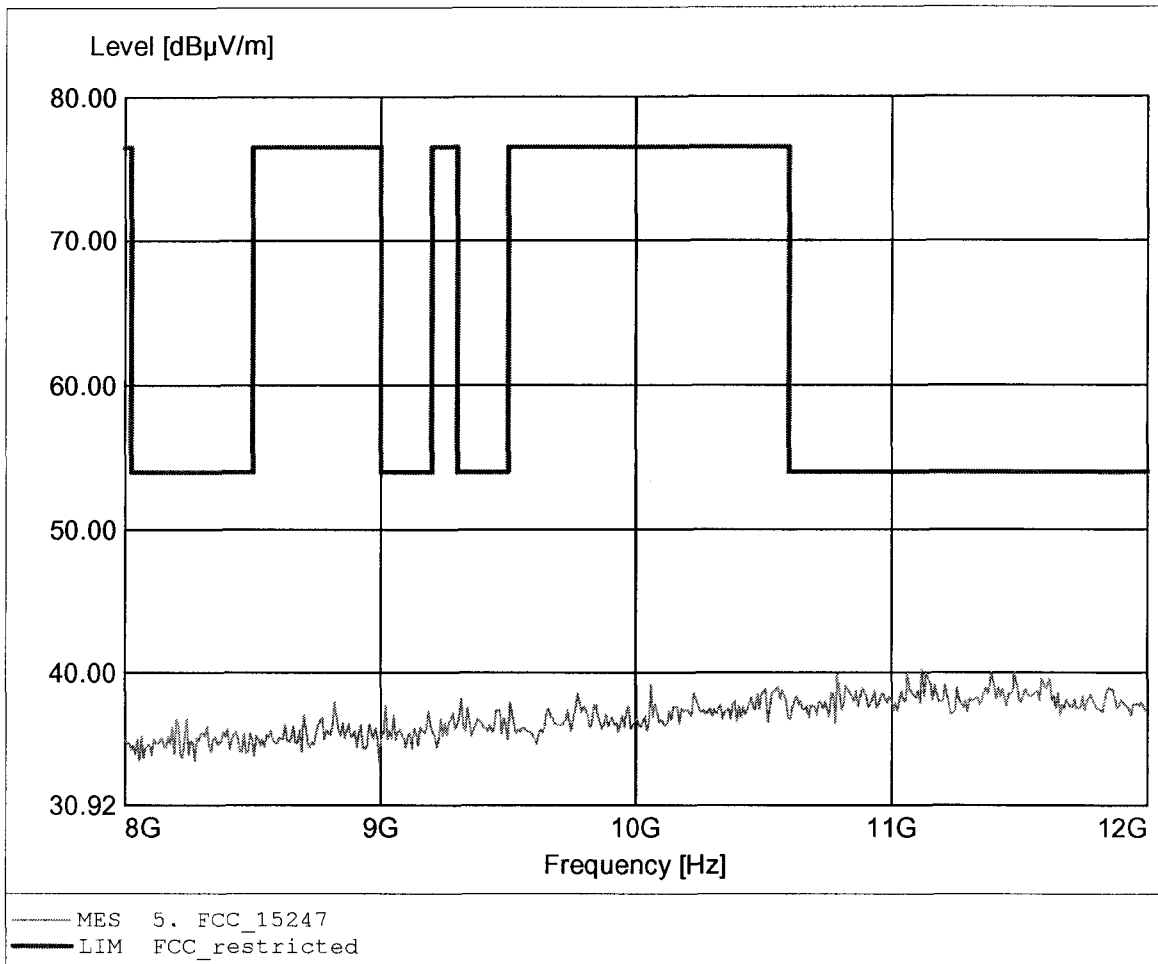

**Spurious emissions Field Strength**

**FCC RULES PART 15, SUBPART C**

Approval Holder: GN Netcom  
EUT / Model: Bluetooth Headset / BT325S  
Frequency: 2402 MHz  
Test Site / Operator: ETS / Mr. Cersovsky  
Temperature/ Voltage: 25°C / Unom: 3,7 V -  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 14.445GHz, Emax: 42.87dBuV/m, RBW: 1MHz

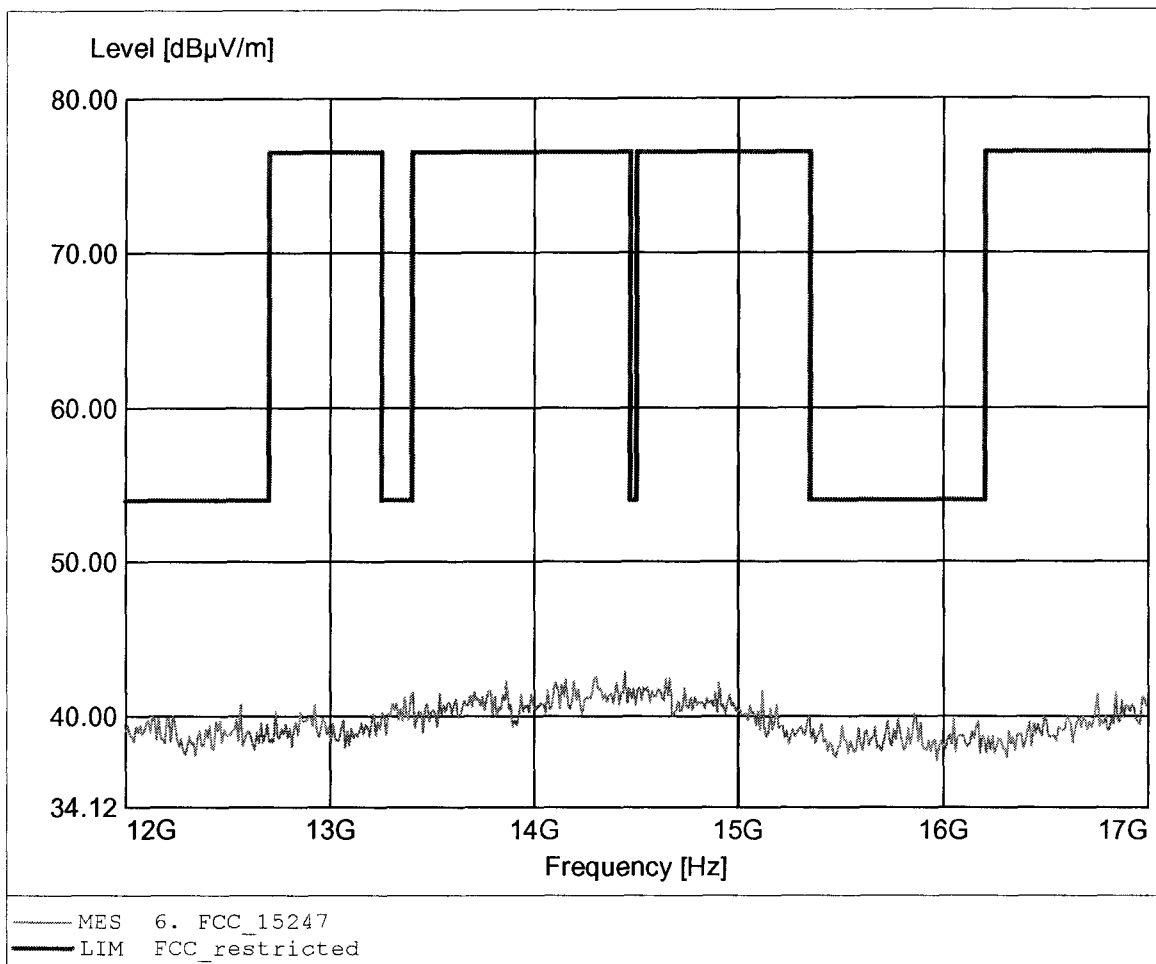




# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom  
EUT / Model: Bluetooth Headset / BT325S  
Frequency: 2402 MHz  
Test Site / Operator: ETS / Mr. Cersovsky  
Temperature/ Voltage: 25°C / Unom: 3,7 V -  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 14.345GHz, Emax: 42.95dBuV/m, RBW: 1MHz

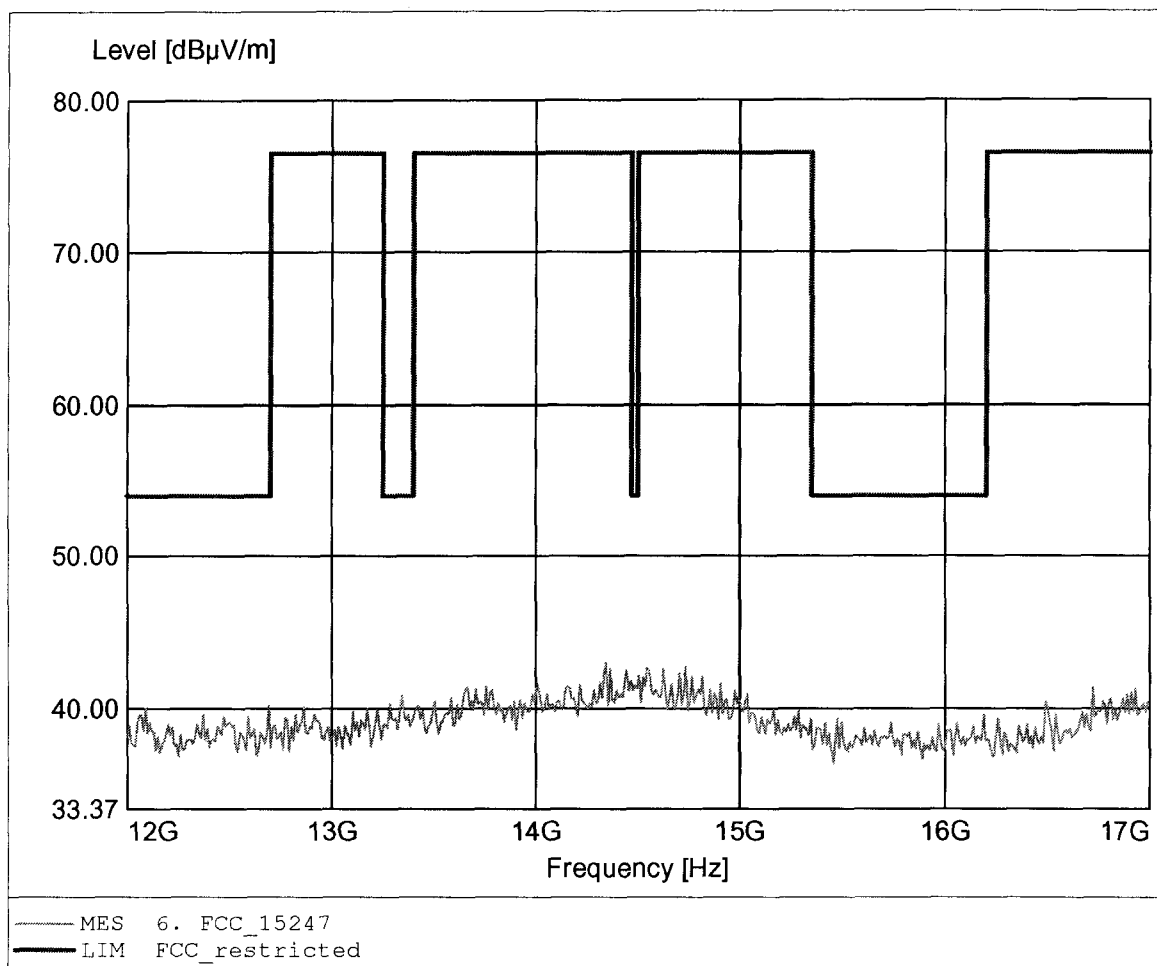

**Spurious emissions Field Strength**

**FCC RULES PART 15, SUBPART C**


Approval Holder: GN Netcom  
EUT / Model: Bluetooth Headset / BT325S  
Frequency: 2402 MHz  
Test Site / Operator: ETS / Mr. Cersovsky  
Temperature/ Voltage: 25°C / Unom: 3,7 V -  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 17.000GHz, Emax: 43.87dBuV/m, REW: 1MHz

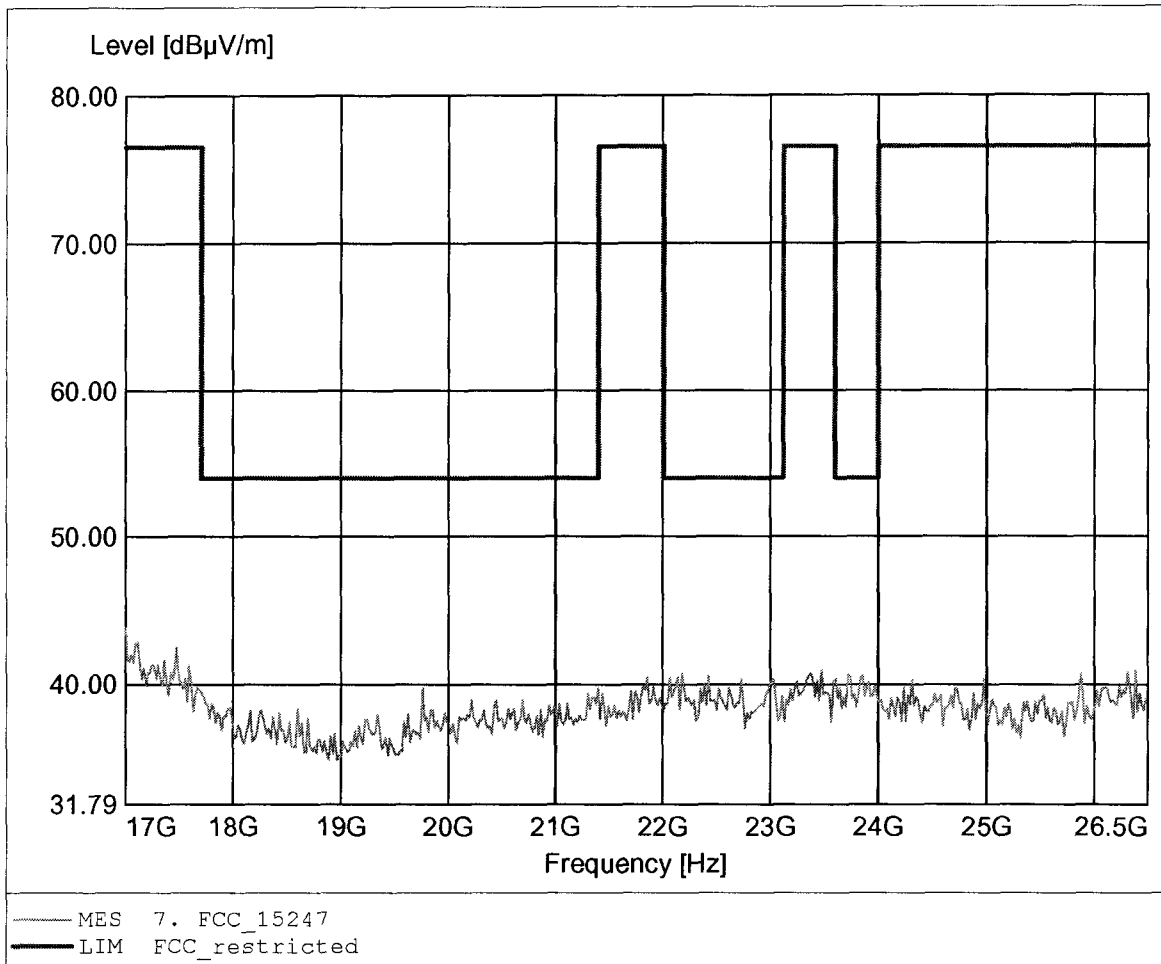

**Spurious emissions Field Strength**

**FCC RULES PART 15, SUBPART C**


Approval Holder: GN Netcom  
EUT / Model: Bluetooth Headset / BT325S  
Frequency: 2402 MHz  
Test Site / Operator: ETS / Mr. Cersovsky  
Temperature/ Voltage: 25°C / Unom: 3,7 V -  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 17.095GHz, Emax: 42.84dBµV/m, RBW: 1MHz

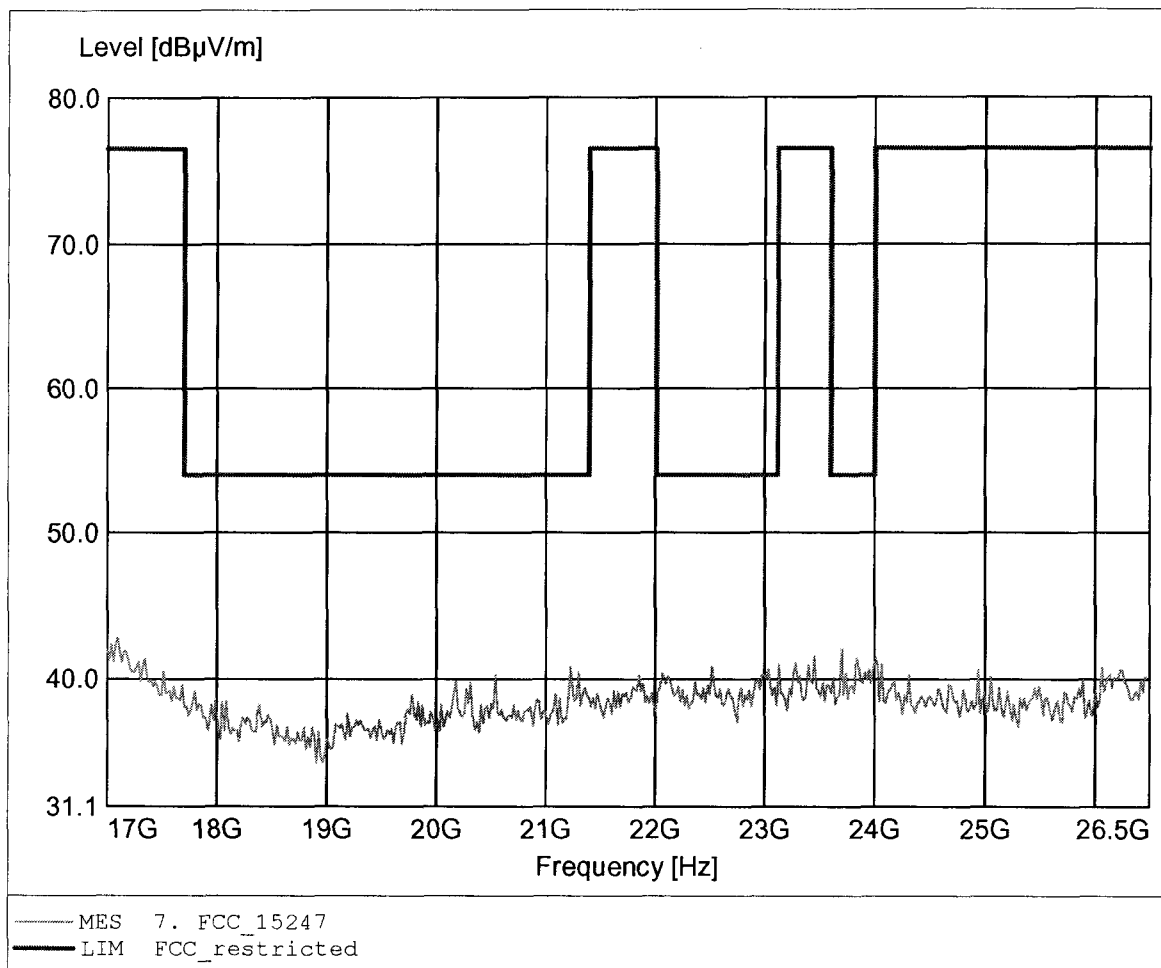

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom  
EUT / Model: Bluetooth Headset / BT325S  
Frequency: 2441 MHz  
Test Site / Operator: ETS / Mr. Cersovsky  
Temperature/ Voltage: 25°C / Unom: 3,7 V -  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 189.439MHz, Emax: 31.66dBµV/m, RBW: 100kHz

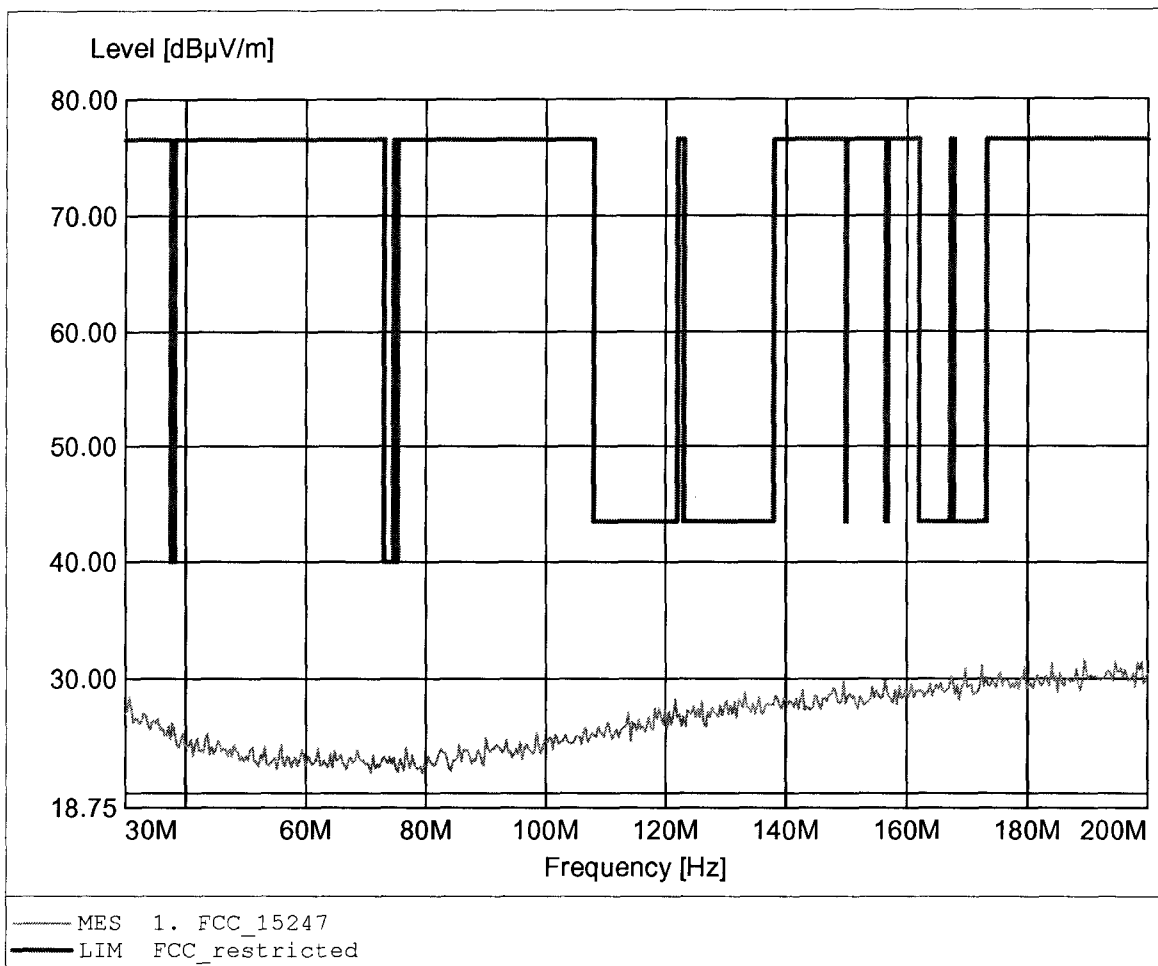

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom  
EUT / Model: Bluetooth Headset / BT325S  
Frequency: 2441 MHz  
Test Site / Operator: ETS / Mr. Cersovsky  
Temperature/ Voltage: 25°C / Unom: 3,7 V -  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 195.912MHz, Emax: 32.20dBµV/m, RBW: 100kHz

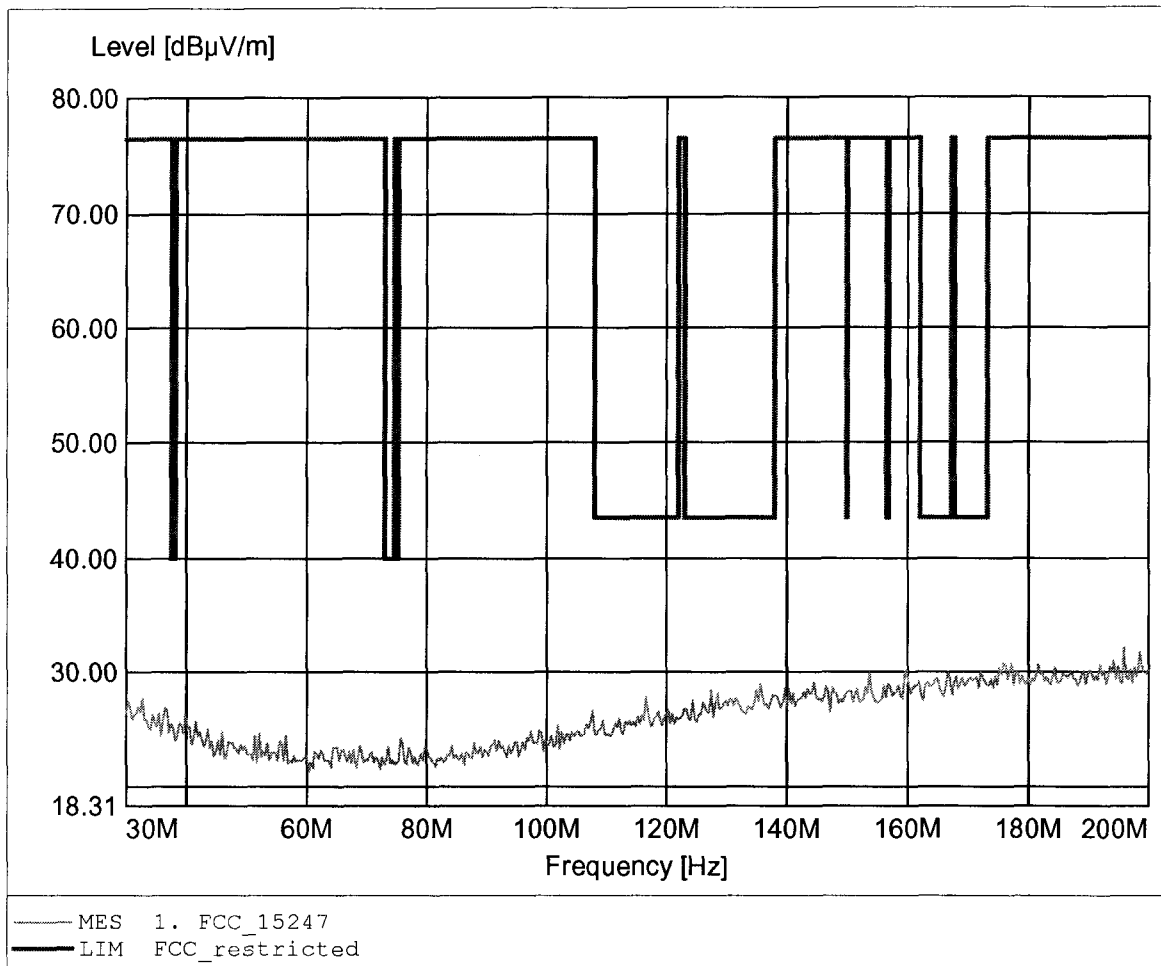

**Spurious emissions Field Strength**

**FCC RULES PART 15, SUBPART C**


Approval Holder: GN Netcom  
EUT / Model: Bluetooth Headset / BT325S  
Frequency: 2441 MHz  
Test Site / Operator: ETS / Mr. Cersovsky  
Temperature/ Voltage: 25°C / Unom: 3,7 V -  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Comment 2: Freq: 301.002MHz, Emax: 29.08dBµV/m, RBW: 100kHz

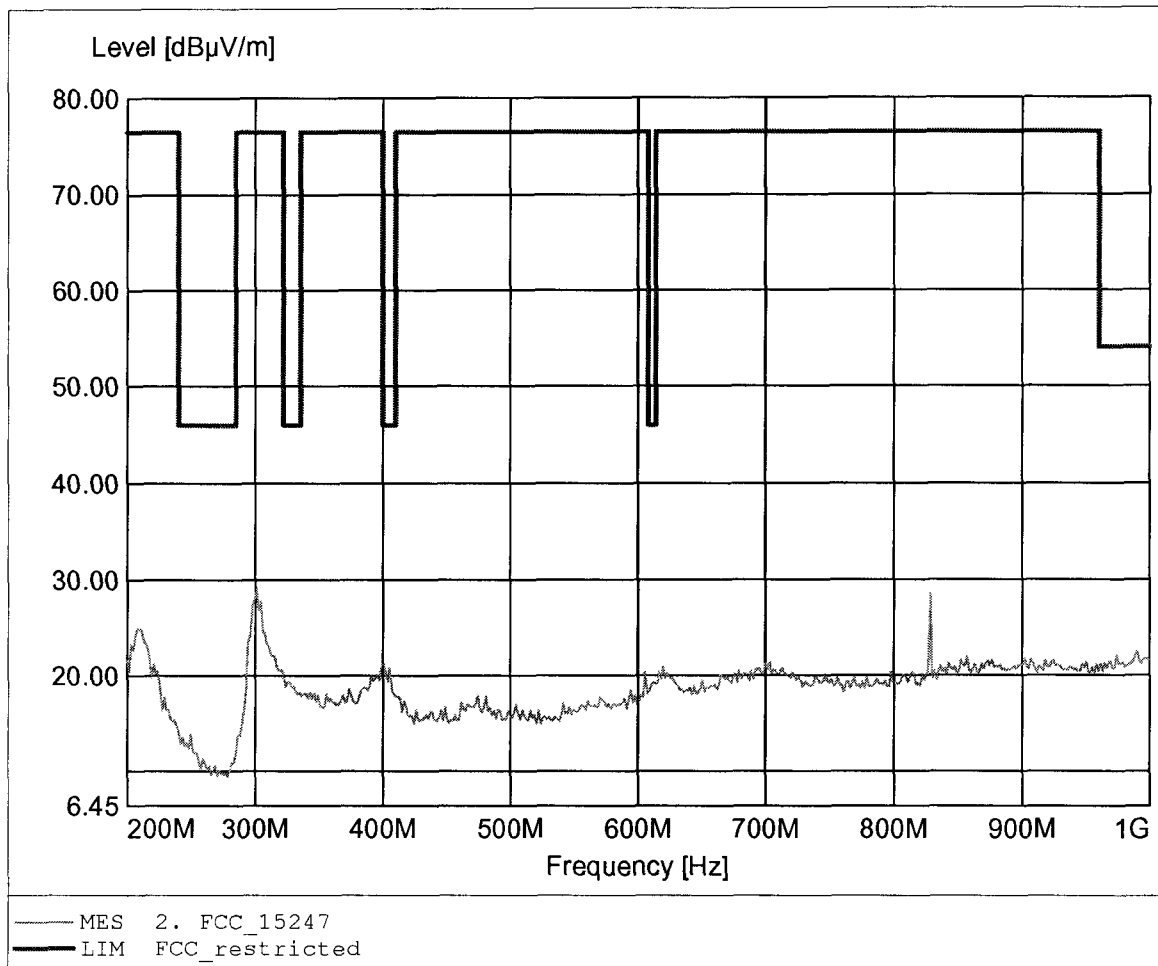

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom  
EUT / Model: Bluetooth Headset / BT325S  
Frequency: 2441 MHz  
Test Site / Operator: ETS / Mr. Cersovsky  
Temperature/ Voltage: 25°C / Unom: 3,7 V -  
Test Specification: according to S15.247  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Comment 2: Freq: 299.399MHz, Emax: 27.09dBµV/m, RBW: 100kHz

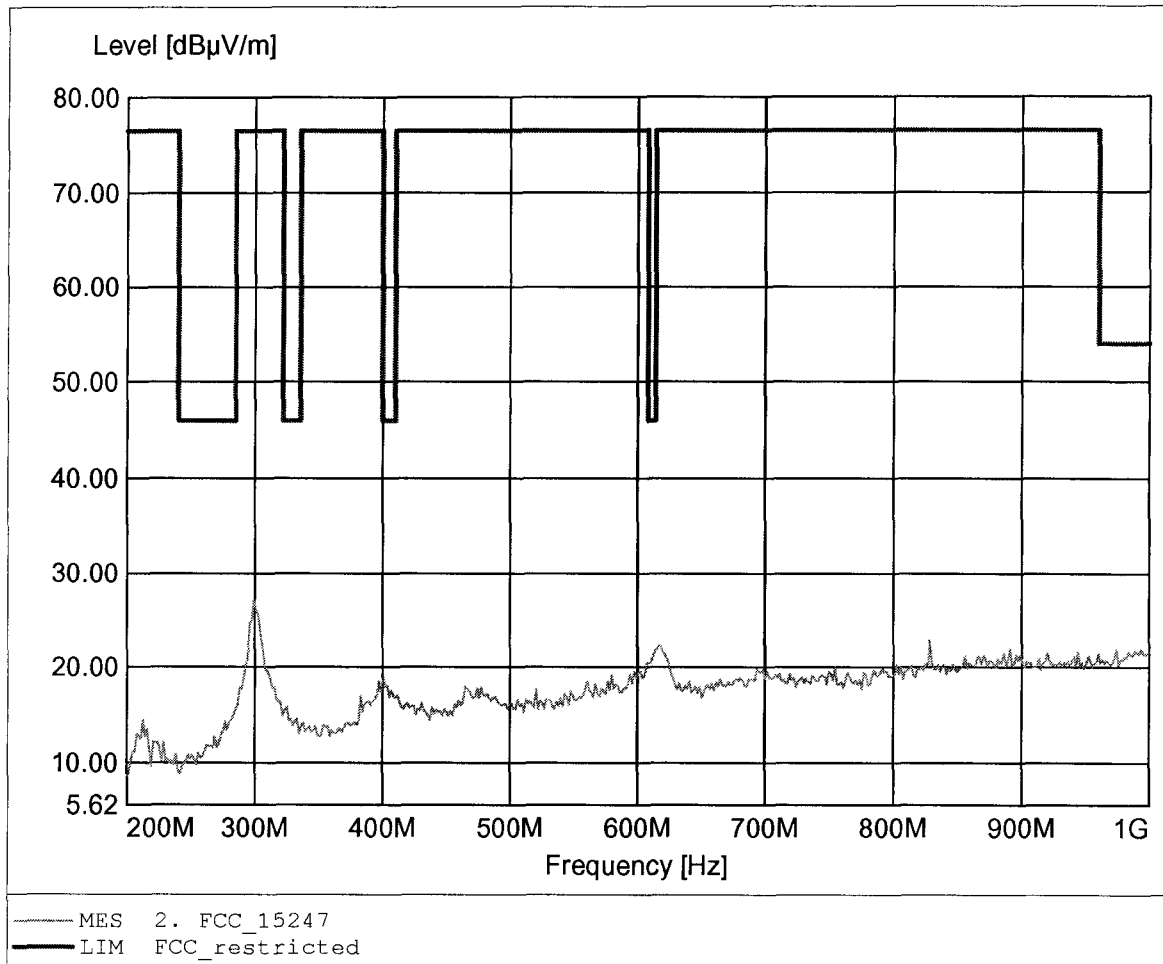

**Spurious emissions Field Strength**

**FCC RULES PART 15, SUBPART C**

Approval Holder: GN Netcom  
EUT / Model: Bluetooth Headset / BT325S  
Frequency: 2441 MHz  
Test Site / Operator: ETS / Mr. Cersovsky  
Temperature/ Voltage: 25°C / Unom: 3,7 V -  
Test Specification: according to S15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.  
Comment 2: Freq: 1.628GHz, Emax: 47.43dBµV/m, RBW: 1MHz

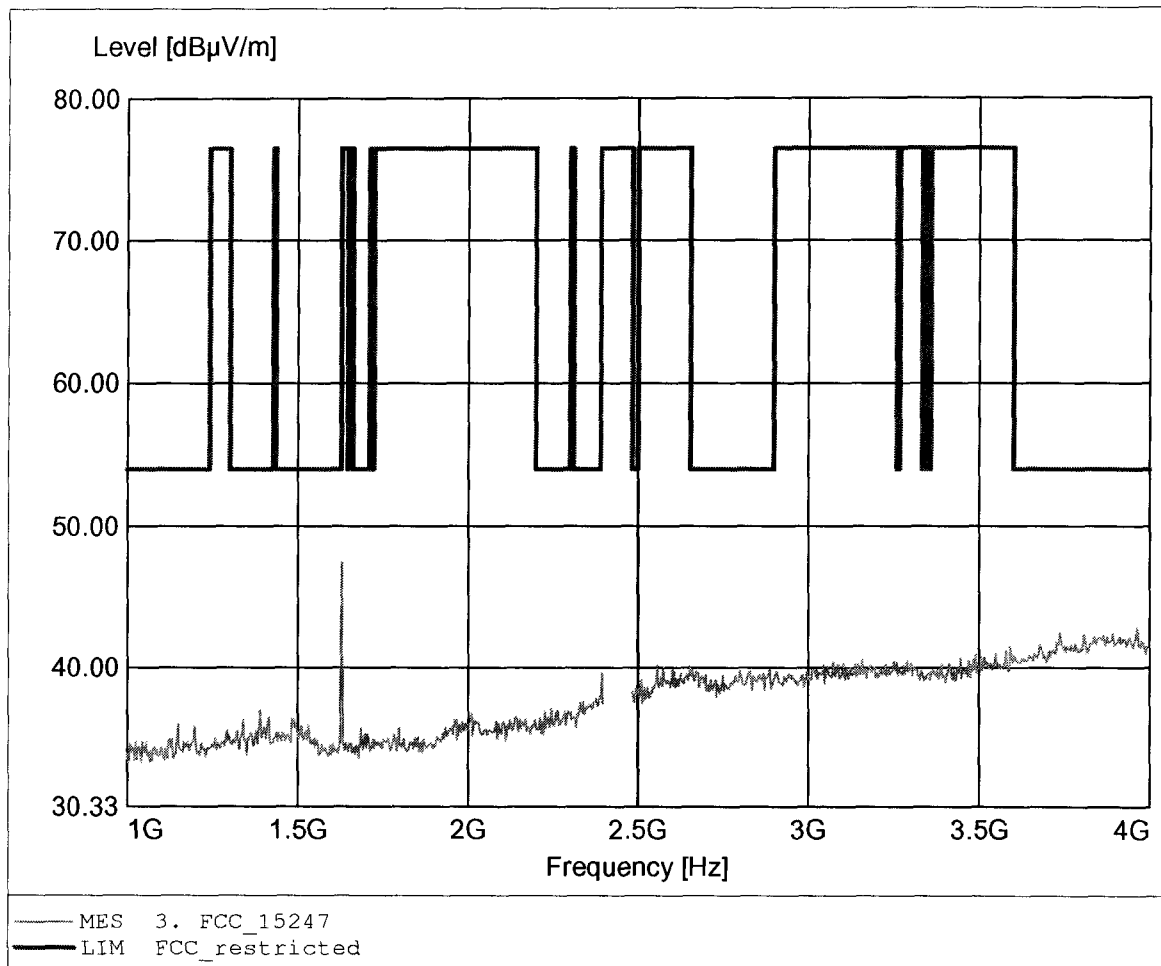




# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom  
EUT / Model: Bluetooth Headset / BT325S  
Frequency: 2441 MHz  
Test Site / Operator: ETS / Mr. Cerovsky  
Temperature/ Voltage: 25°C / Unom: 3,7 V -  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.  
Comment 2: Freq: 1.628GHz, Emax: 43.33dBµV/m, RBW: 1MHz

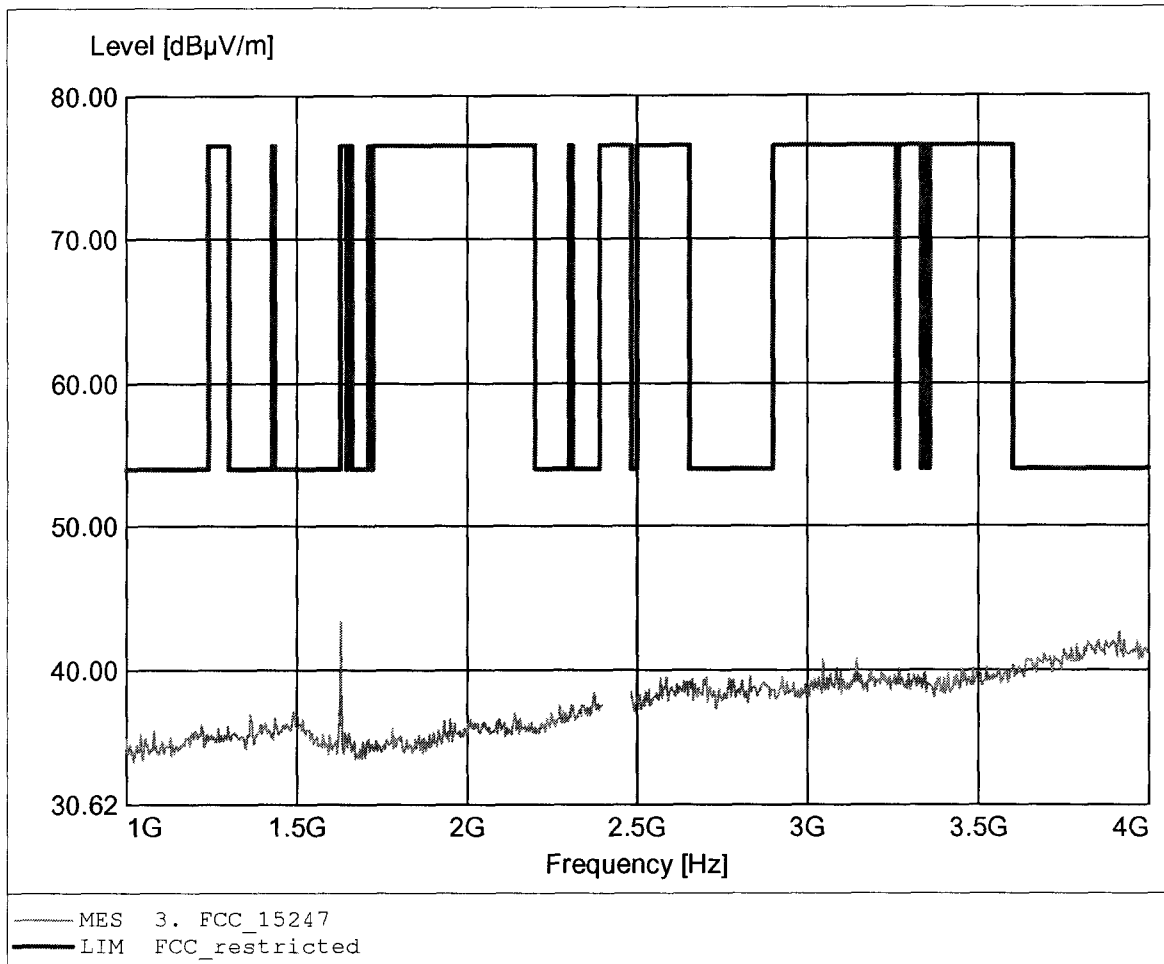

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom  
EUT / Model: Bluetooth Headset / BT325S  
Frequency: 2441 MHz  
Test Site / Operator: ETS / Mr. Cersovsky  
Temperature/ Voltage: 25°C / Unom: 3,7 V -  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 7.936GHz, Emax: 37.39dBµV/m, RBW: 1MHz

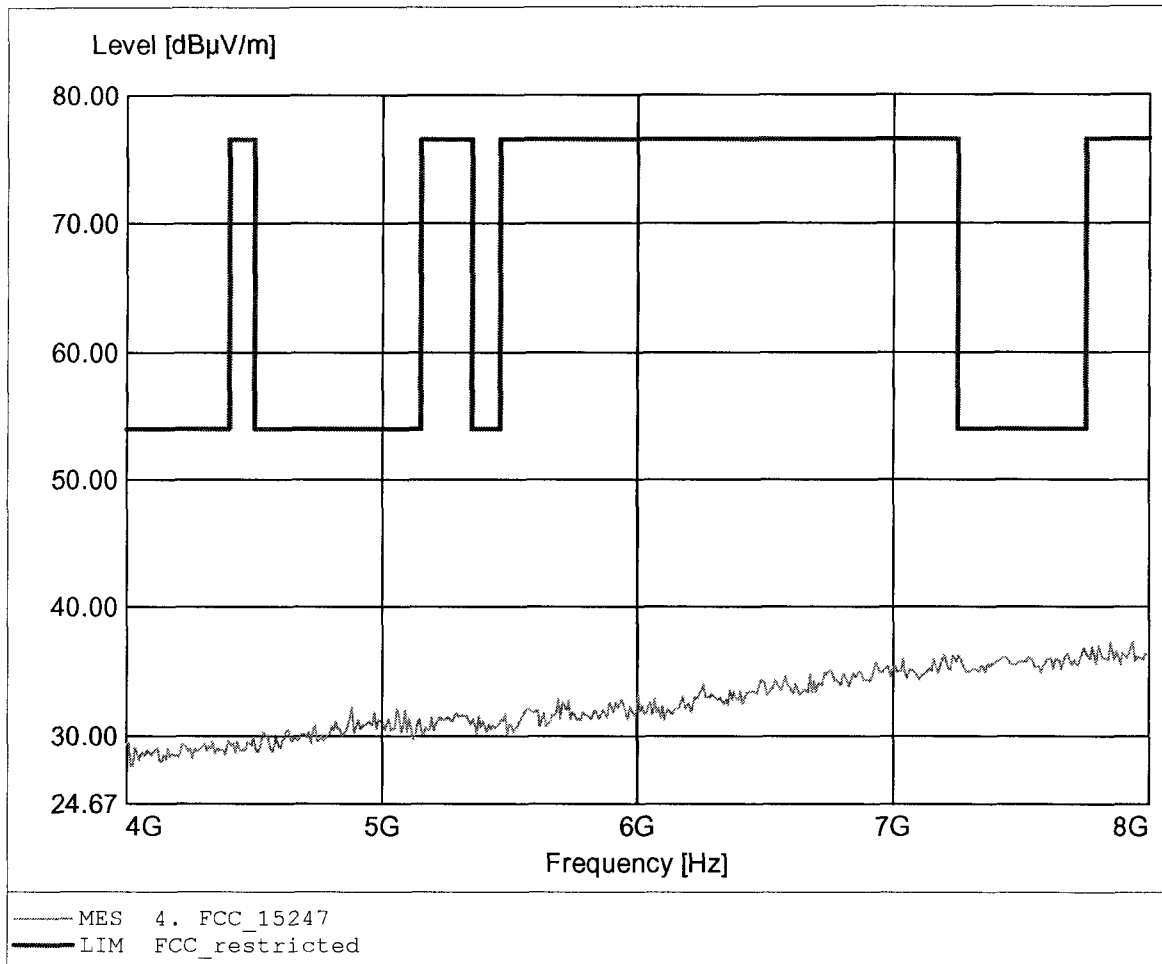

**Spurious emissions Field Strength**

**FCC RULES PART 15, SUBPART C**


Approval Holder: GN Netcom  
EUT / Model: Bluetooth Headset / BT325S  
Frequency: 2441 MHz  
Test Site / Operator: ETS / Mr. Cersovsky  
Temperature/ Voltage: 25°C / Unom: 3,7 V -  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 7.944GHz, Emax: 37.28dBuV/m, REW: 1MHz

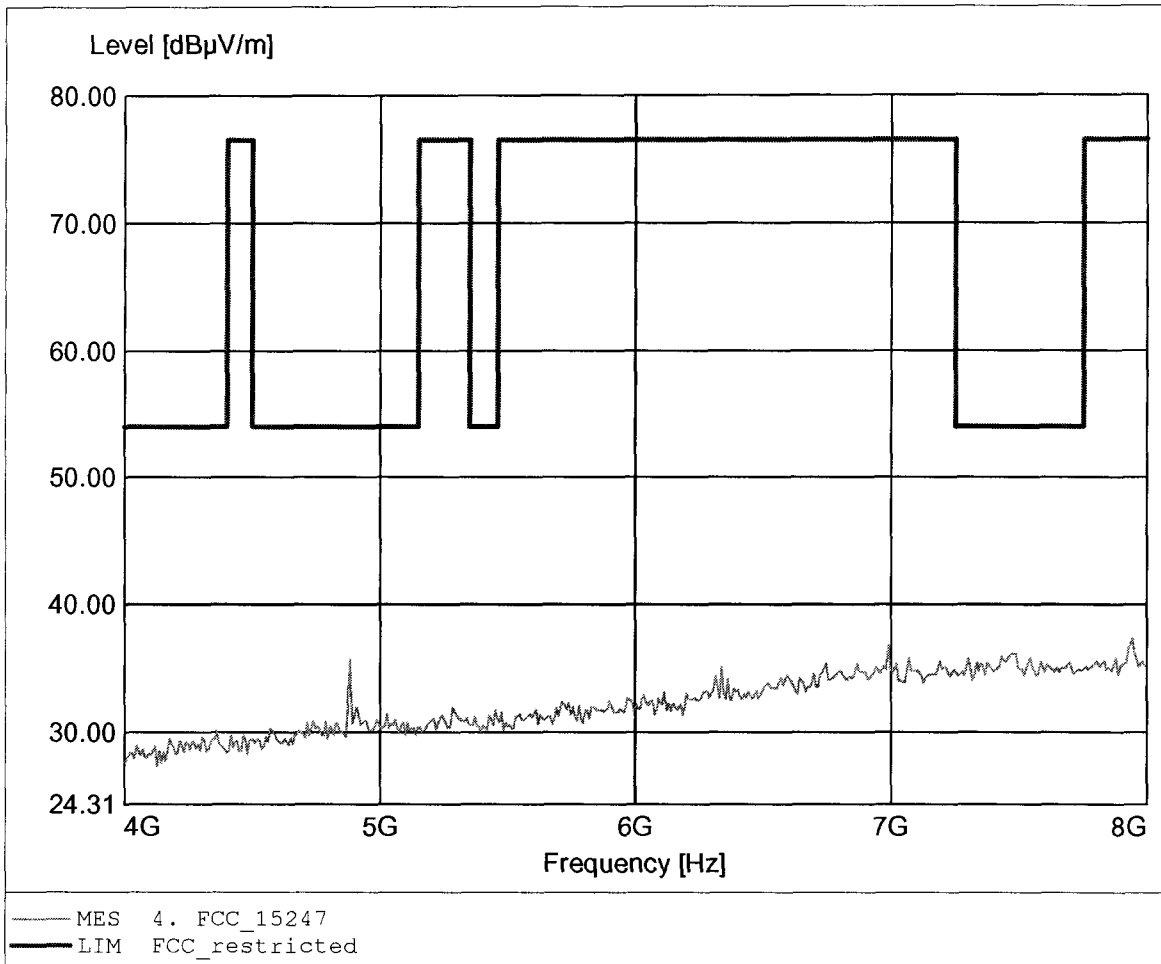

**Spurious emissions Field Strength**

**FCC RULES PART 15, SUBPART C**


Approval Holder: GN Netcom  
EUT / Model: Bluetooth Headset / BT325S  
Frequency: 2441 MHz  
Test Site / Operator: ETS / Mr. Cersovsky  
Temperature/ Voltage: 25°C / Unom: 3,7 V -  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 11.134GHz, Emax: 40.14dBµV/m, RBW: 1MHz

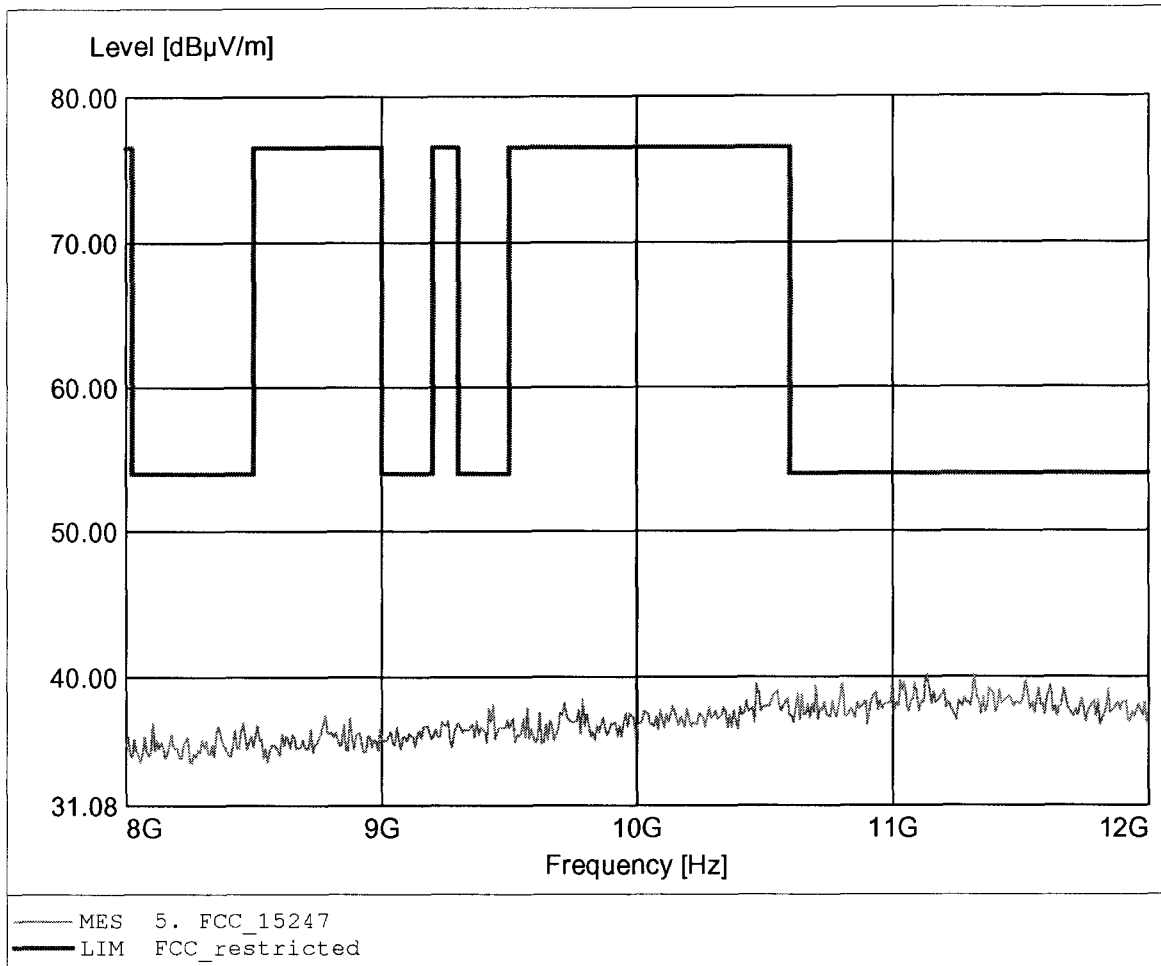

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom  
EUT / Model: Bluetooth Headset / BT325S  
Frequency: 2441 MHz  
Test Site / Operator: ETS / Mr. Cerovsky  
Temperature/ Voltage: 25°C / Unom: 3,7 V -  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 11.142GHz, Emax: 39.96dBuV/m, RBW: 1MHz

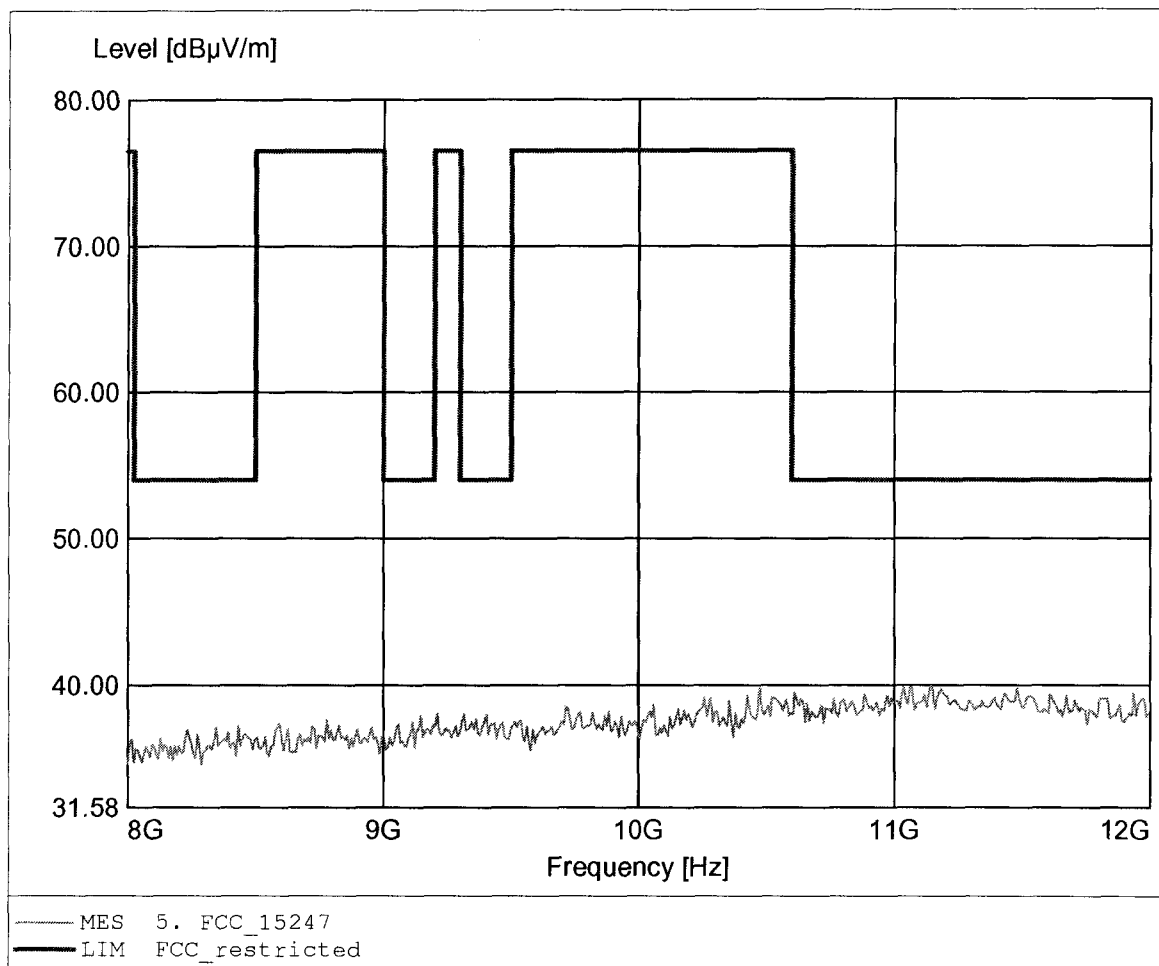

**Spurious emissions Field Strength**

**FCC RULES PART 15, SUBPART C**


Approval Holder: GN Netcom  
EUT / Model: Bluetooth Headset / BT325S  
Frequency: 2441 MHz  
Test Site / Operator: ETS / Mr. Cerovsky  
Temperature/ Voltage: 25°C / Unom: 3,7 V -  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 13.733GHz, Emax: 42.31dBuV/m, RBW: 1MHz

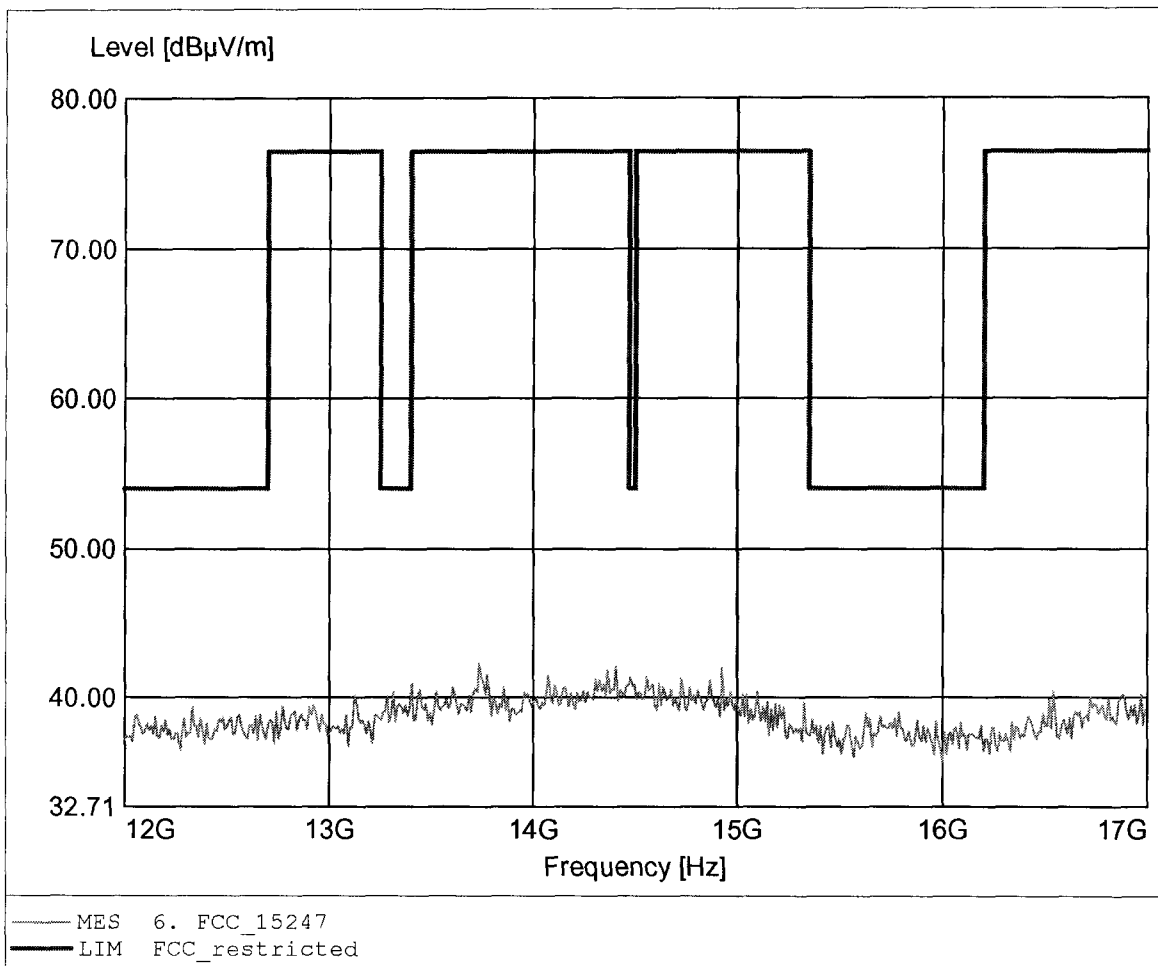

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom  
EUT / Model: Bluetooth Headset / BT325S  
Frequency: 2441 MHz  
Test Site / Operator: ETS / Mr. Cerovsky  
Temperature/ Voltage: 25°C / Unom: 3,7 V -  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 16.820GHz, Emax: 41.89dBuV/m, RBW: 1MHz

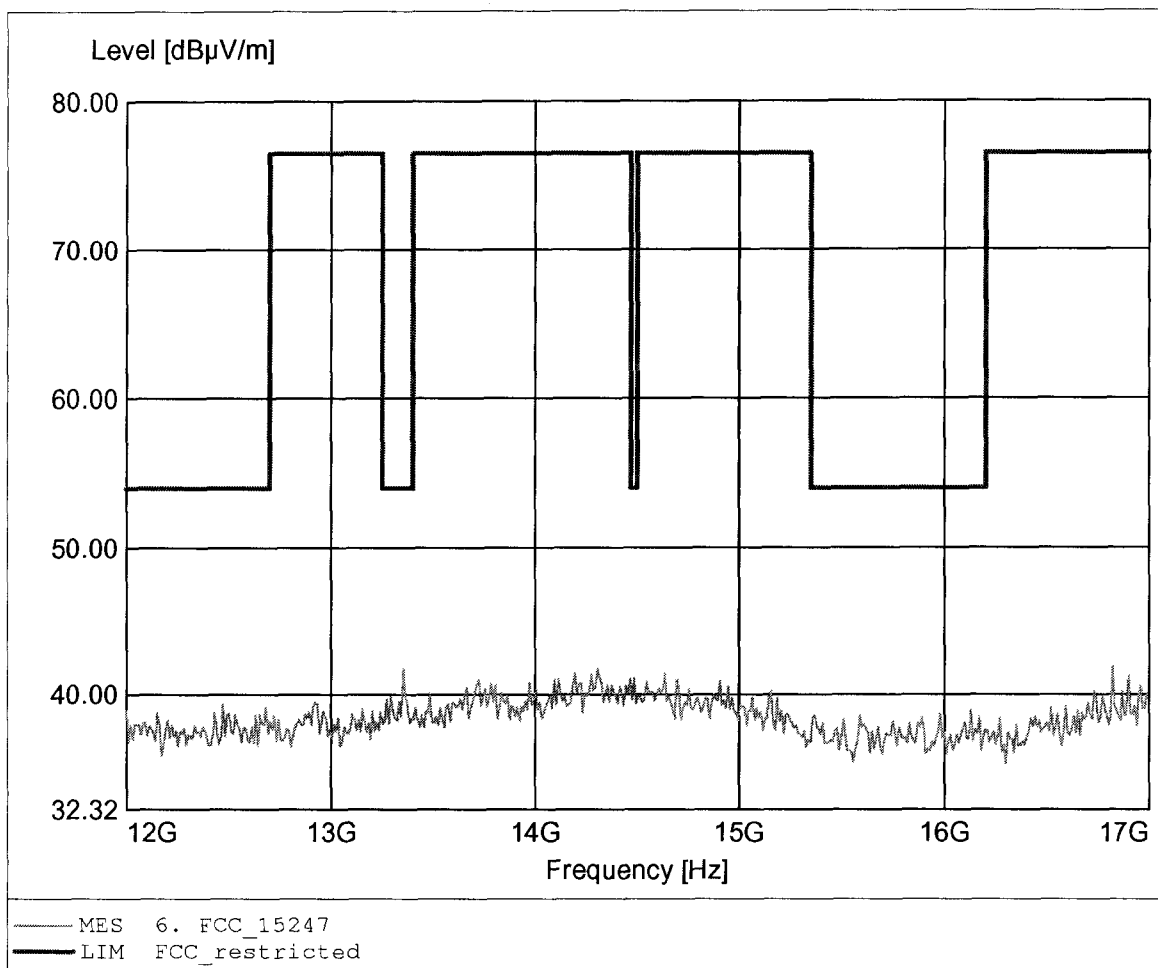

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C

Approval Holder: GN Netcom  
EUT / Model: Bluetooth Headset / BT325S  
Frequency: 2441 MHz  
Test Site / Operator: ETS / Mr. Cersovsky  
Temperature/ Voltage: 25°C / Unom: 3,7 V -  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 17.133GHz, Emax: 42.80dBµV/m, RBW: 1MHz

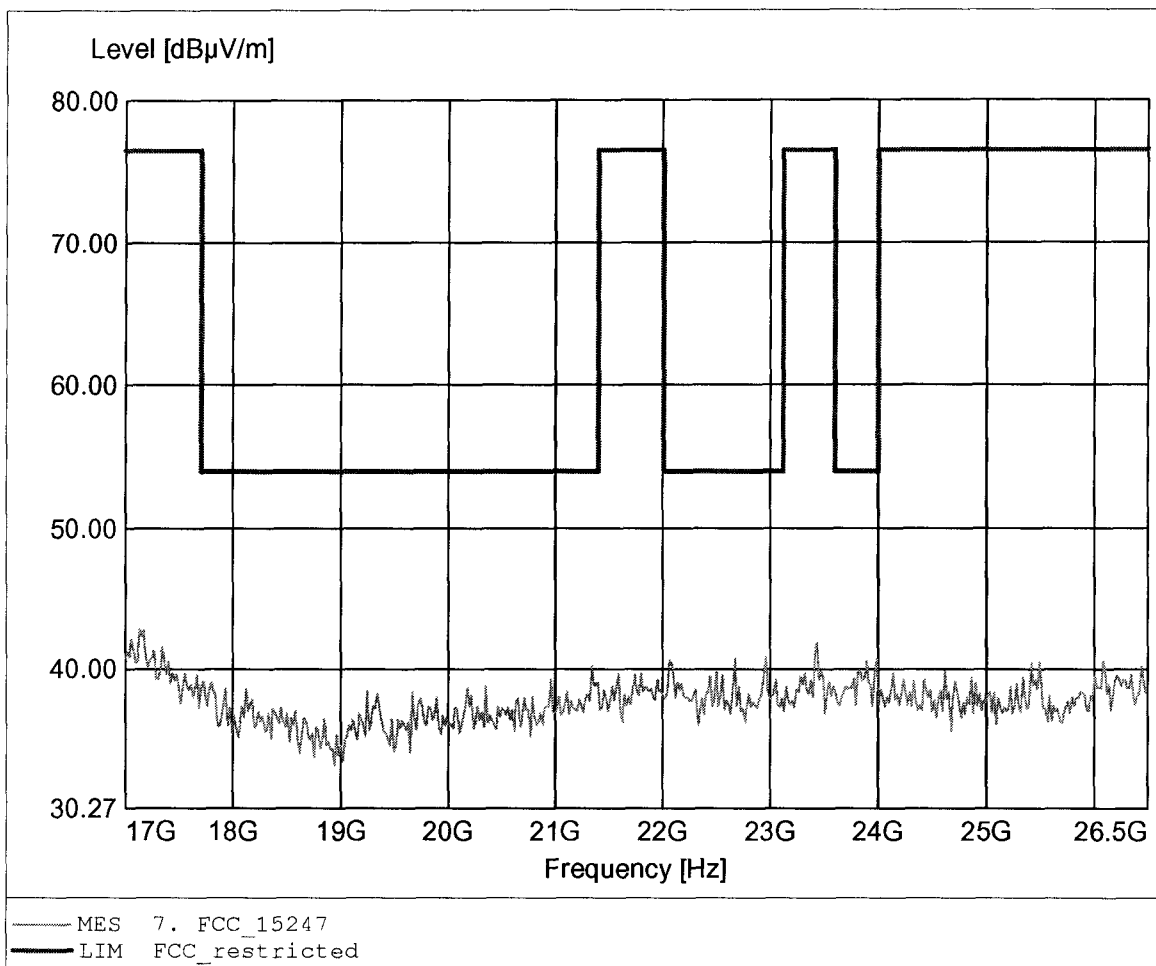



**Spurious emissions Field Strength**

**FCC RULES PART 15, SUBPART C**

Approval Holder: GN Netcom  
EUT / Model: Bluetooth Headset / BT325S  
Frequency: 2441 MHz  
Test Site / Operator: ETS / Mr. Cerovsky  
Temperature/ Voltage: 25°C / Unom: 3,7 V -  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 17.114GHz, Emax: 42.80dBµV/m, RBW: 1MHz

