




Appendix B

Peak Output Power




Marker 1 [T1] RBW 1 MHz RF Att 50 dB
Ref Lvl 3.07 dBm VBW 1 MHz
25 dBm 2.40183868 GHz SWT 5 ms Unit dBm

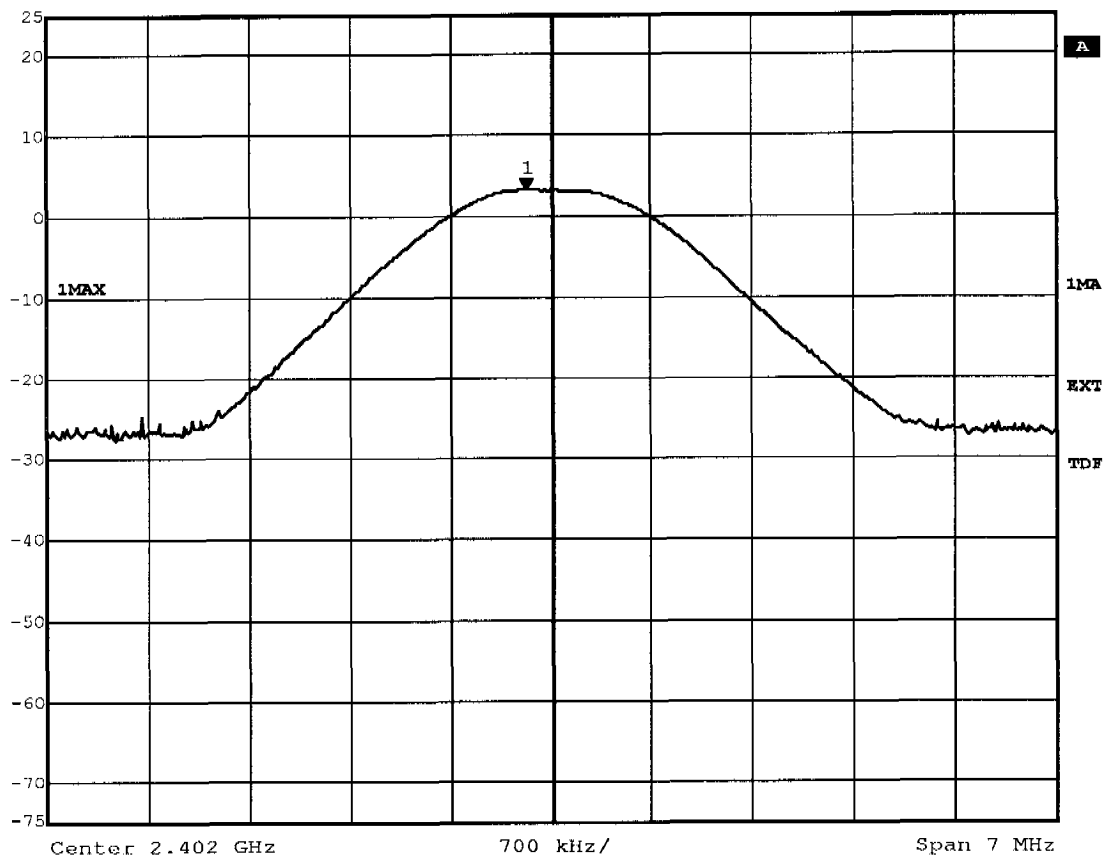

Title: Peak Output Power conducted Ch.: 0
Comment A: Jabra BT620s
Date: 12.SEP.2005 15:28:40




Marker 1 [T1] RBW 1 MHz RF Att 50 dB
Ref Lvl 2.72 dBm VBW 1 MHz
25 dBm 2.44089479 GHz SWT 5 ms Unit dBm

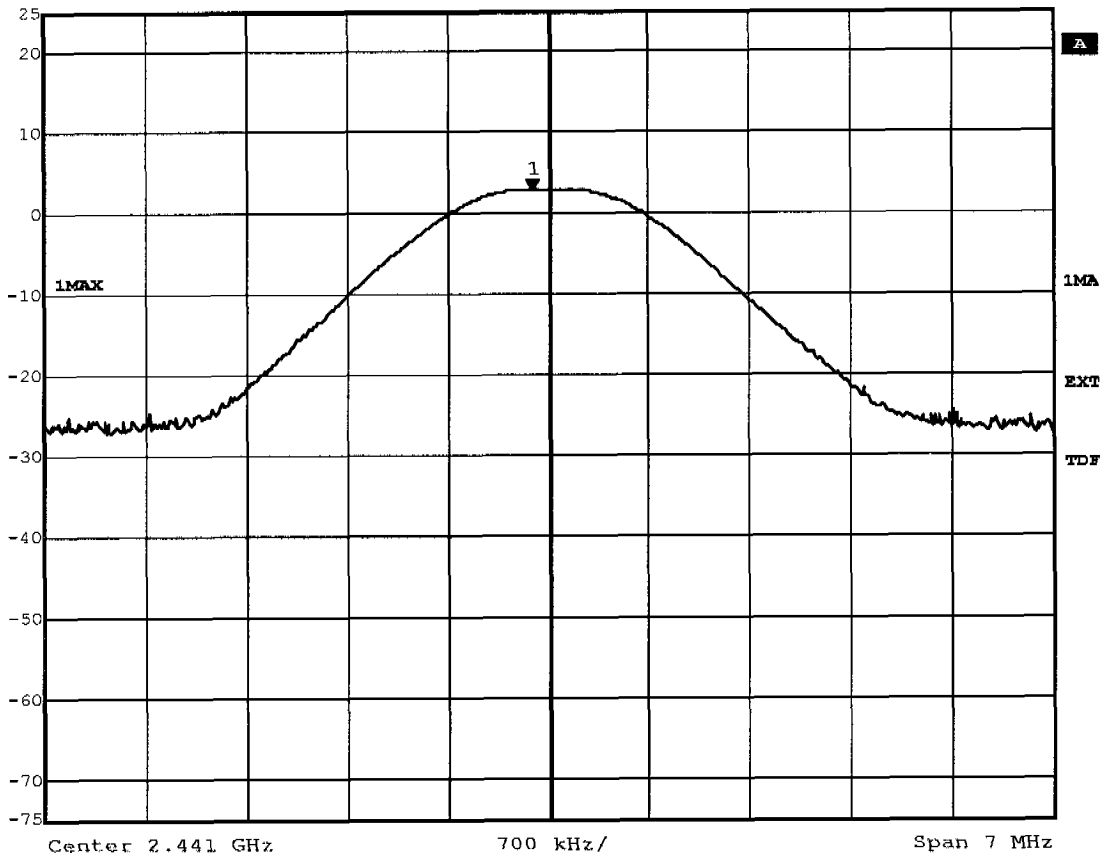

Title: Peak Output Power conducted Ch.: 39
Comment A: Jabra BT620s
Date: 12.SEP.2005 15:35:31



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	50 dB
25 dBm	2.46 dBm	VBW	1 MHz		
	2.47983868 GHz	SWT	5 ms	Unit	dBm

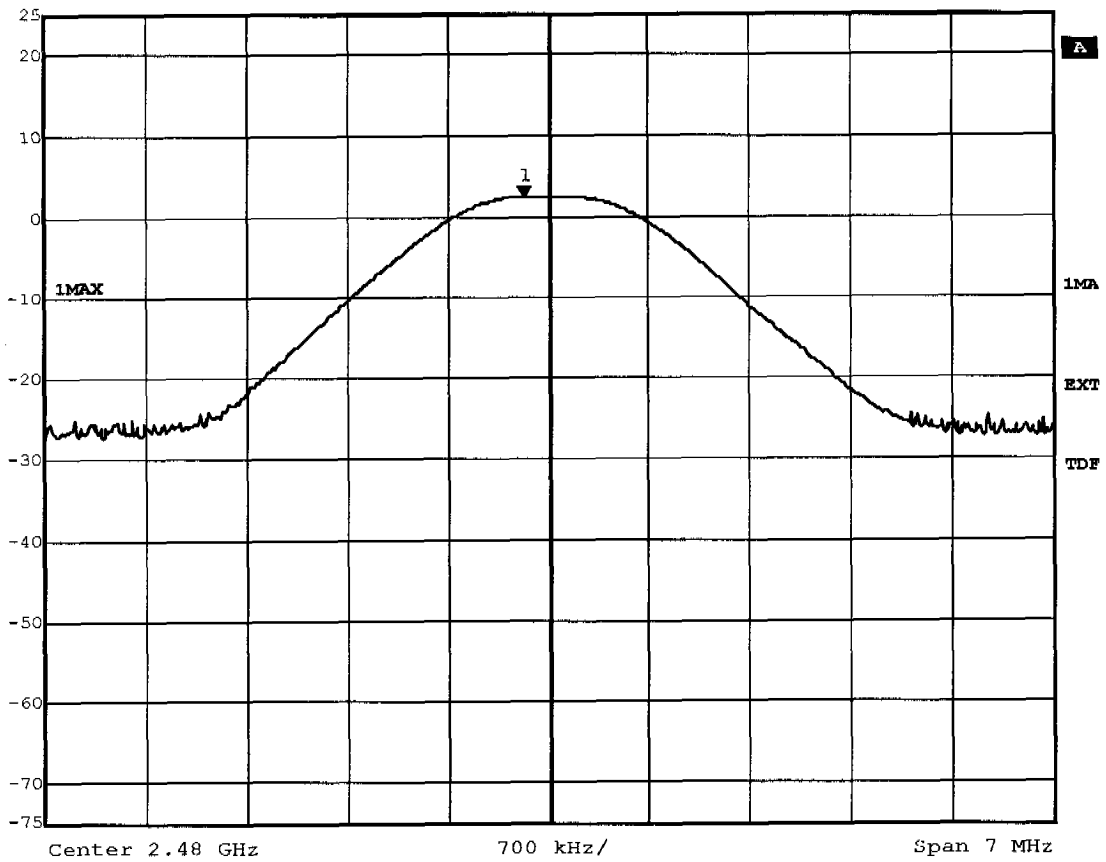

Title: Peak Output Power conducted Ch.: 78
Comment A: Jabra BT620s
Date: 12.SEP.2005 15:33:58




Appendix C

Spurious Emissions radiated - Transmitter operating

Carrier power (Field Strength)

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset
Model: Jabra BT620s / 2480 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.70 VDC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Emax: 95.01dBµV/m, RBW: 100kHz

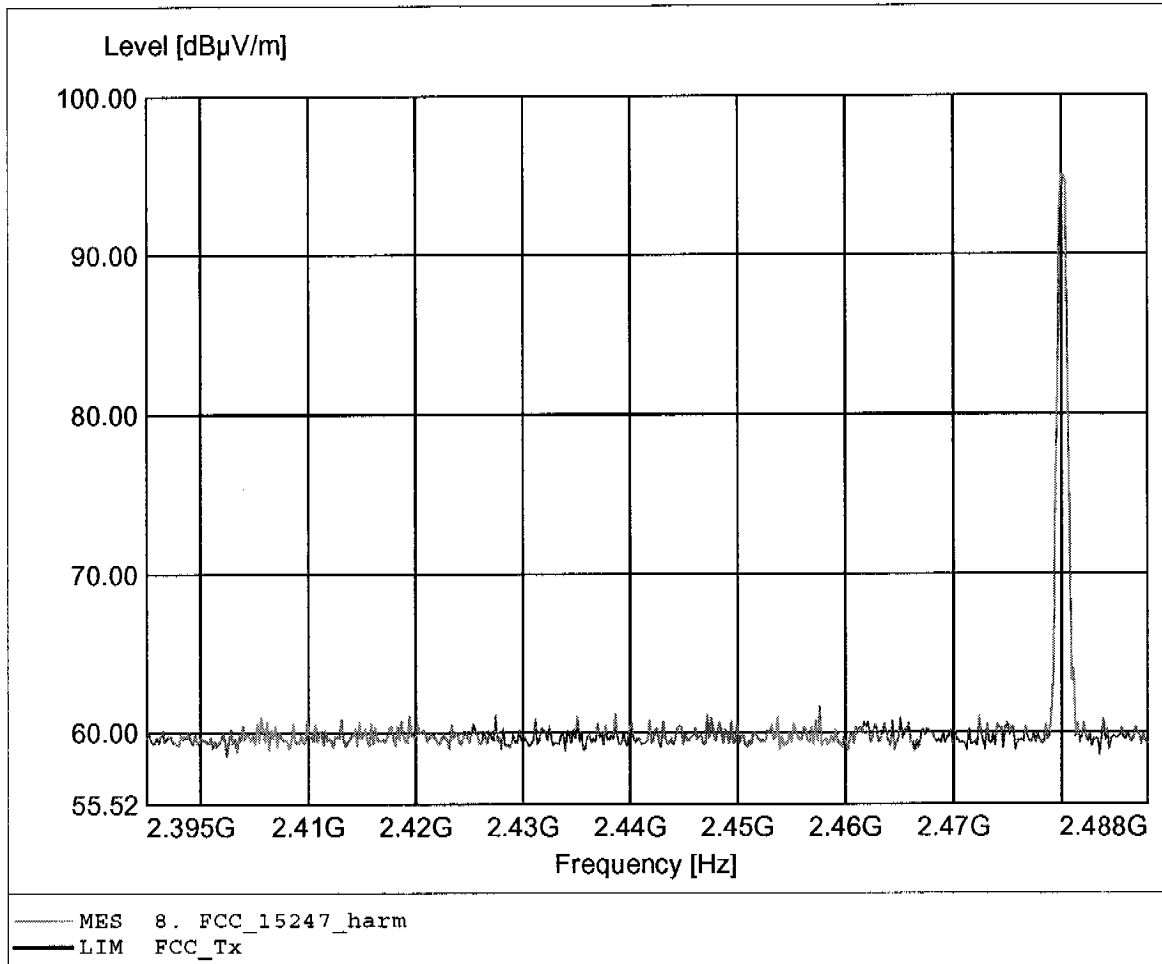

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset
Model: Jabra BT620s / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom= 3.70 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 195.230MHz, Emax: 32.82dBµV/m, REW: 100kHz

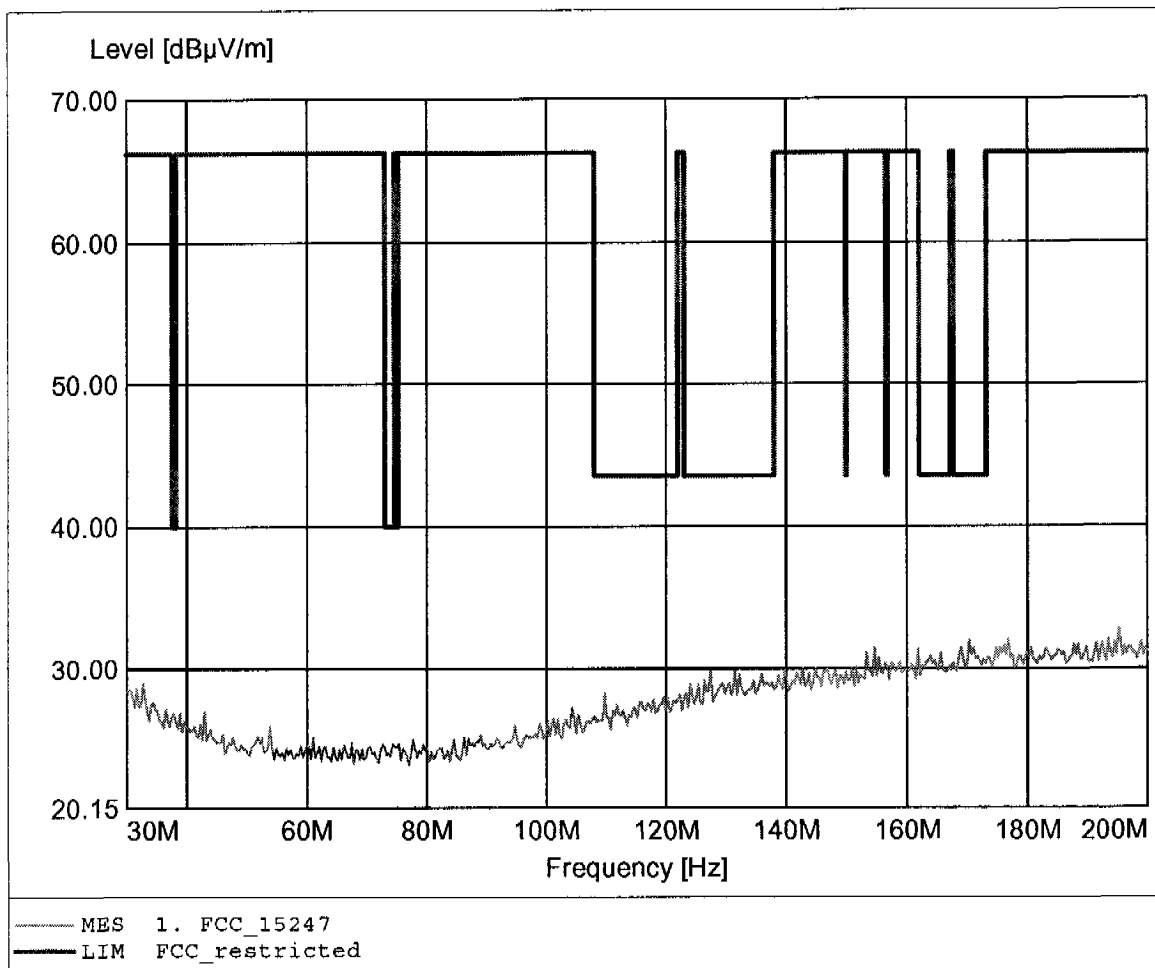

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset
Model: Jabra BT620s / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom= 3.70 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 194.890MHz, Emax: 32.41dBµV/m, RBW: 100kHz

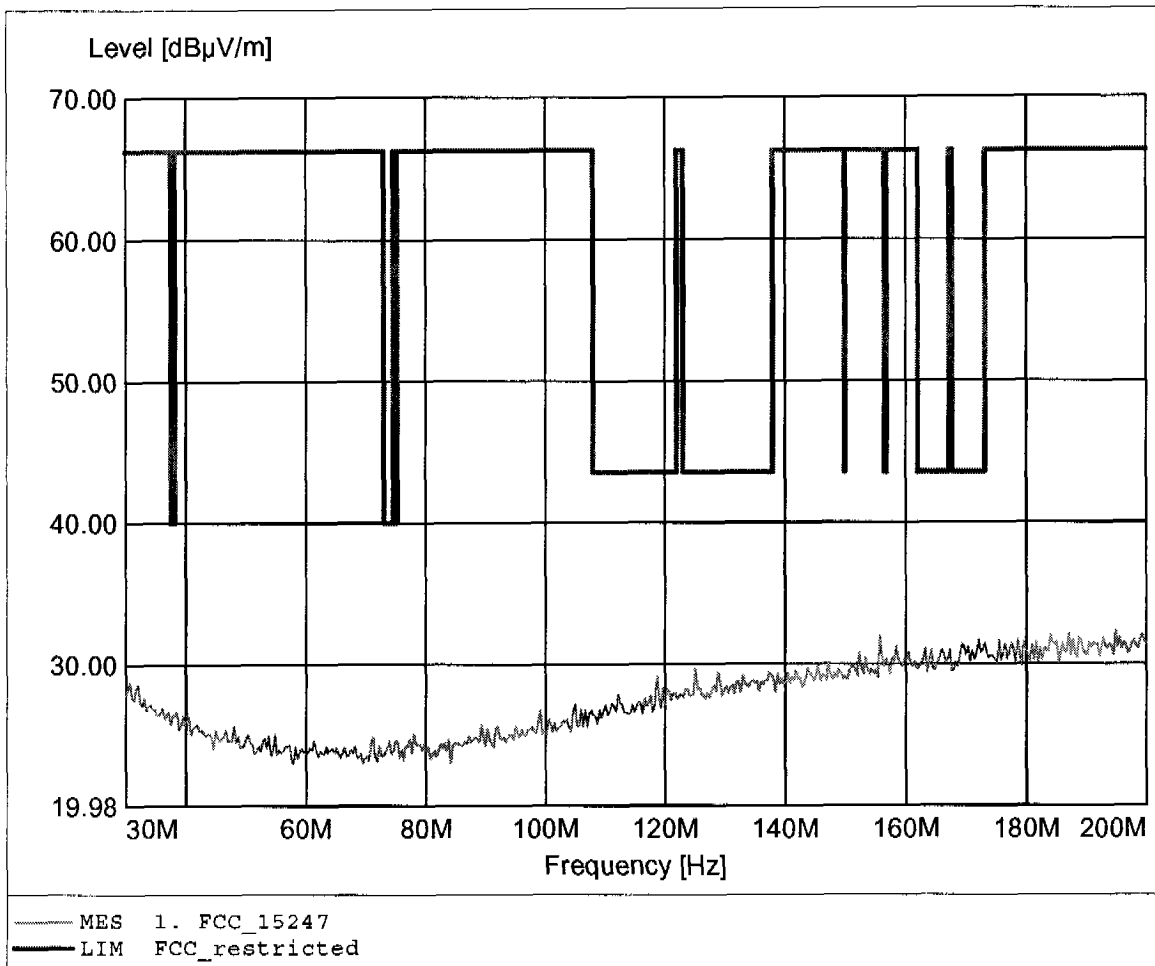

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset
Model: Jabra BT620s / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom= 3.70 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 801.202MHz, Emax: 29.79dBuV/m, RBW: 100kHz

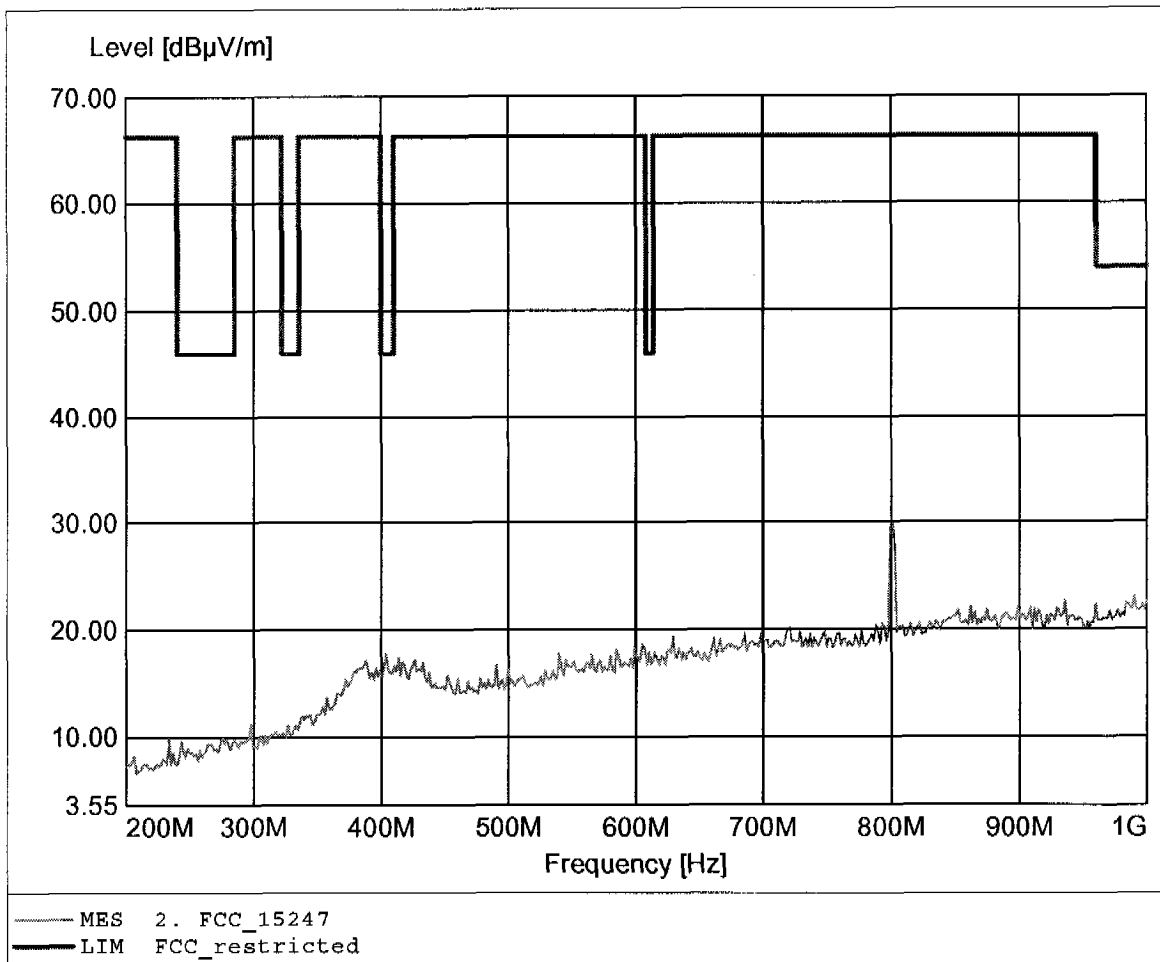

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset
Model: Jabra BT620s / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom= 3.70 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 801.202MHz, Emax: 26.05dBµV/m, RBW: 100kHz

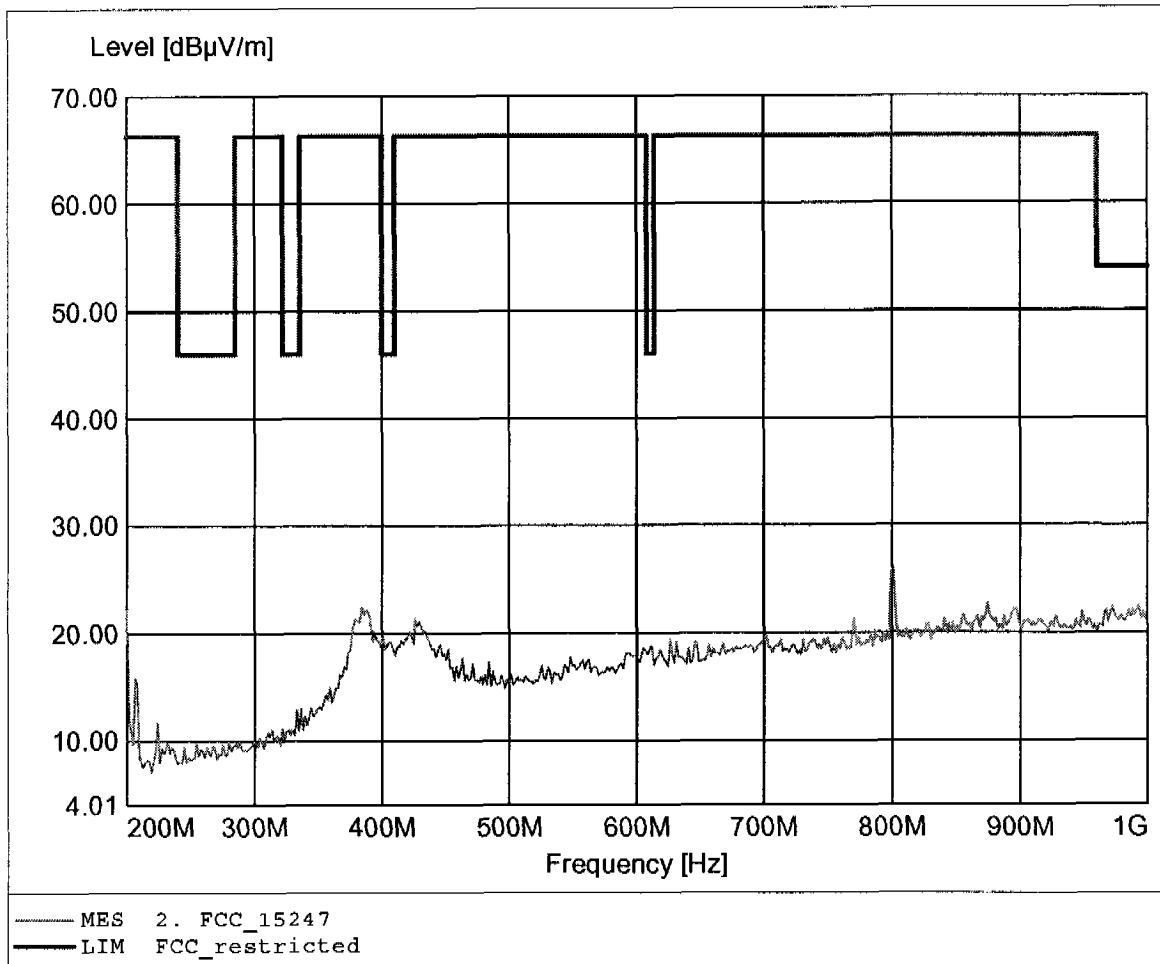

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset
Model: Jabra BT620s / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.70 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.389GHz, Emax: 43.96dBµV/m, RBW: 1MHz

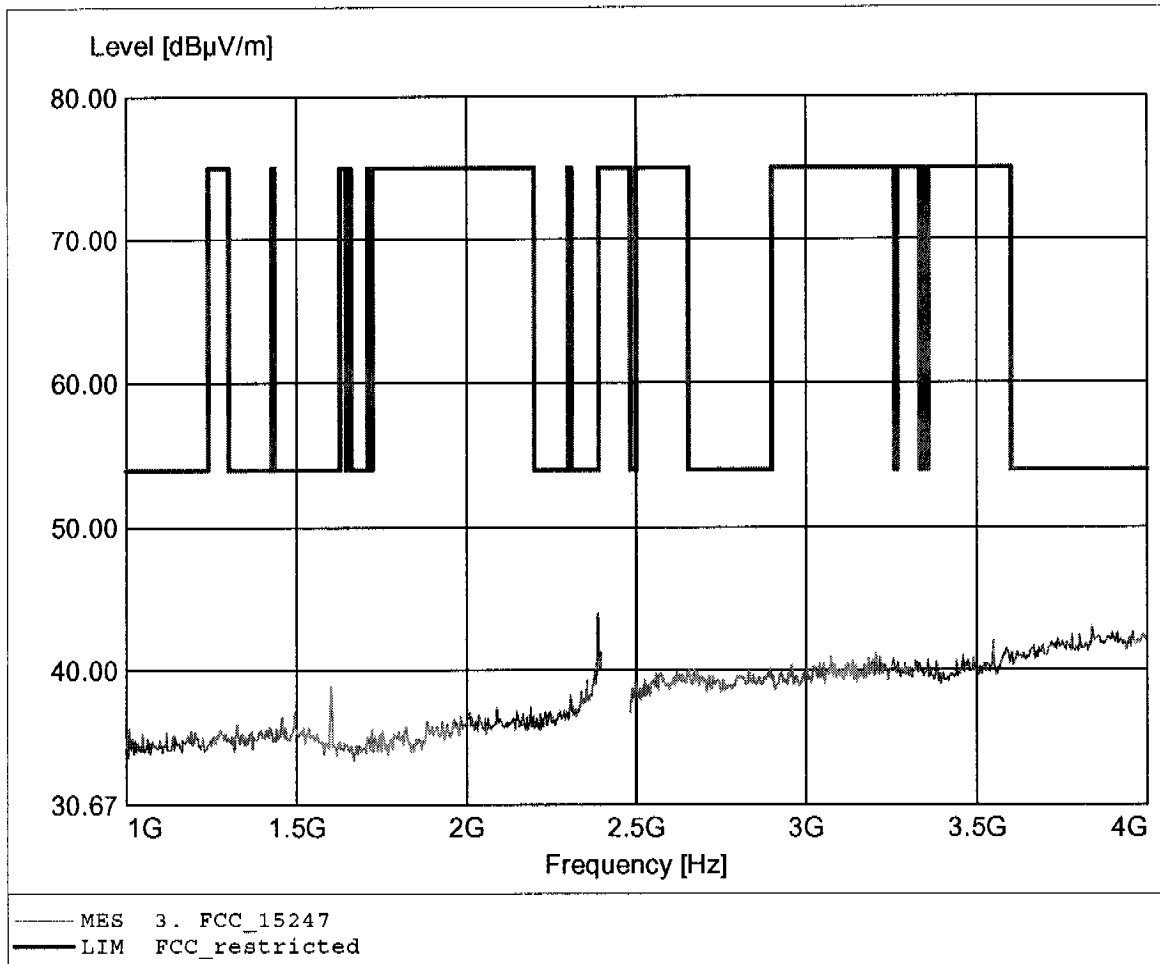

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset
Model: Jabra BT620s / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.70 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.389GHz, Emax: 42.91dBuV/m, RBW: 1MHz

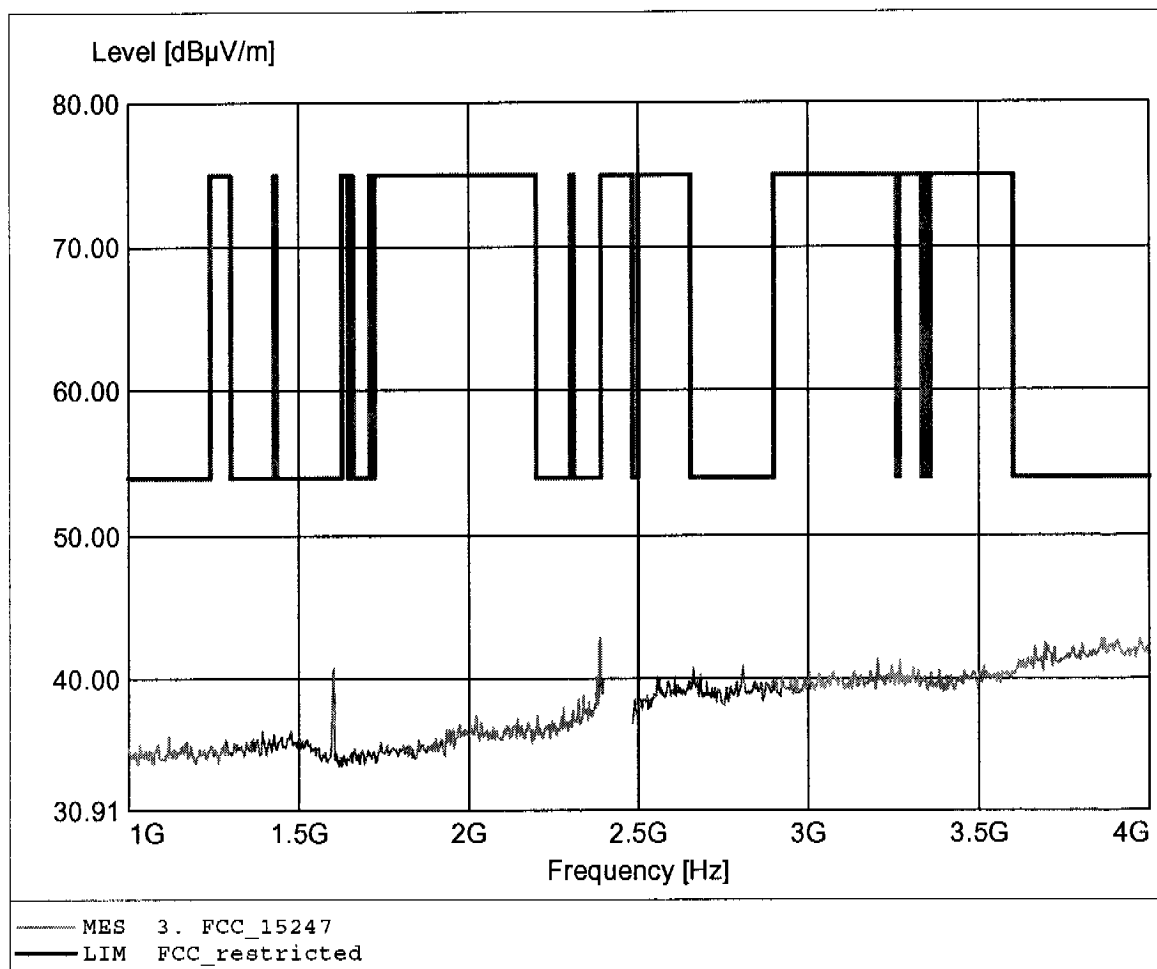

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset
Model: Jabra BT620s / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.70 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 45.27dBuV/m, REW: 1MHz

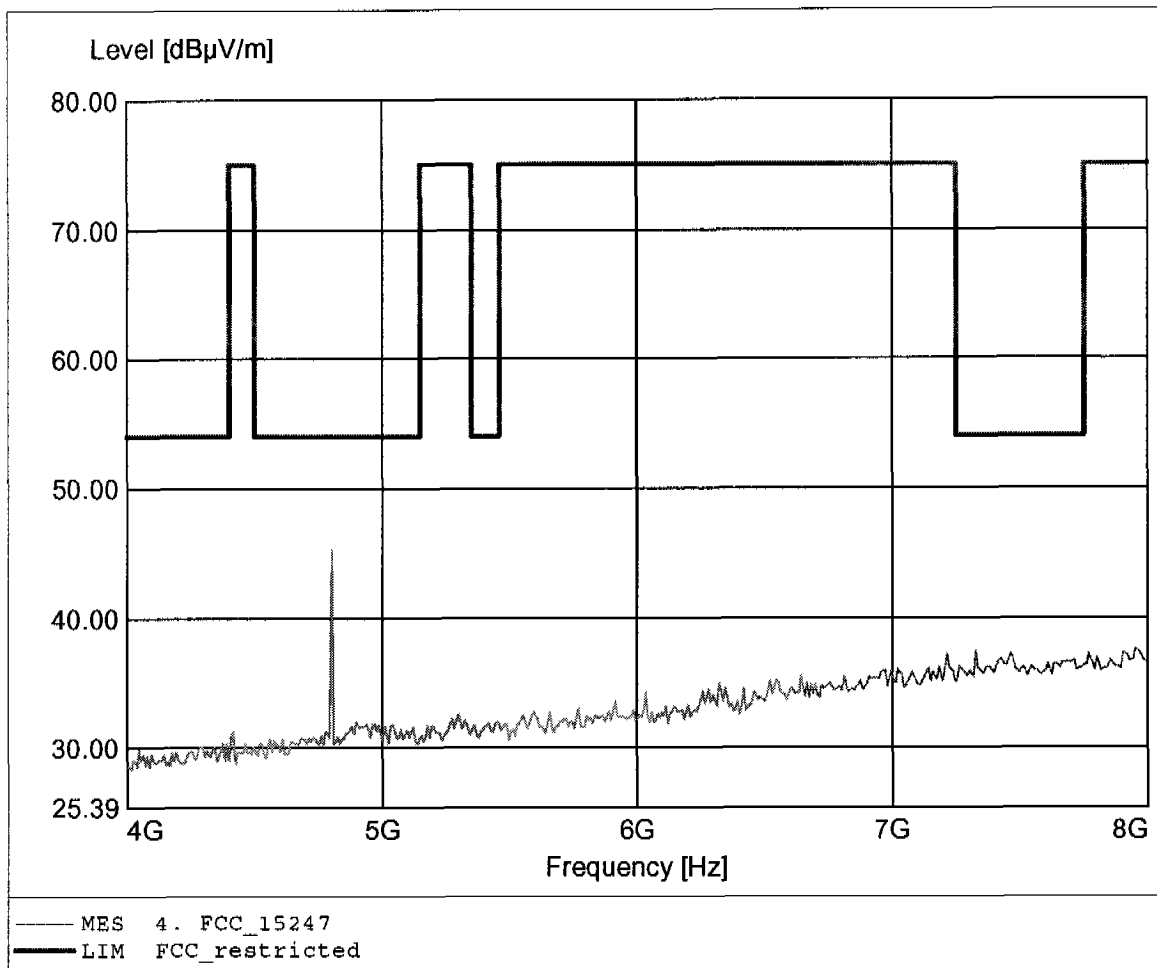

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset
Model: Jabra BT620s / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.70 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 44.24dBµV/m, RBW: 1MHz

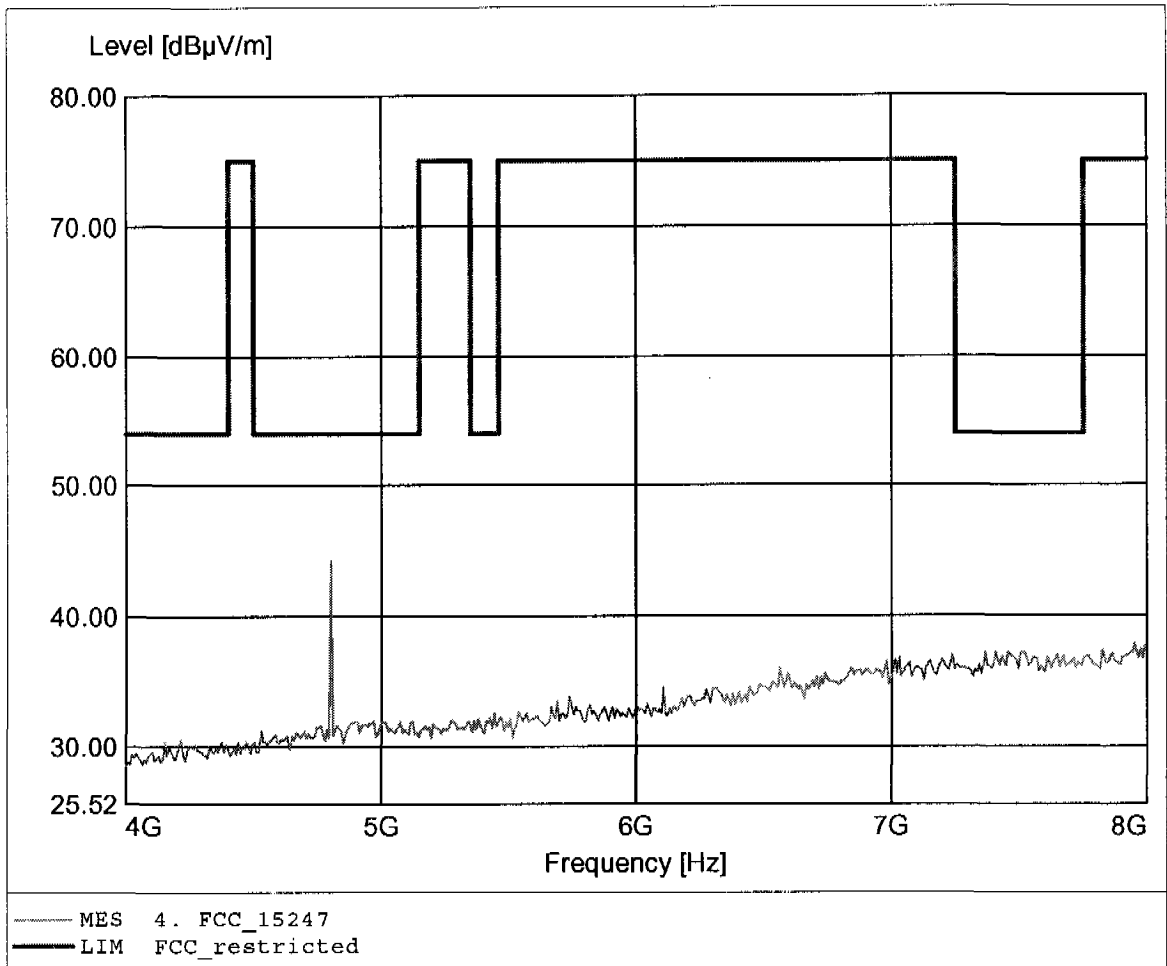

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset
Model: Jabra BT620s / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.70 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 10.934GHz, Emax: 40.87dBµV/m, RBW: 1MHz

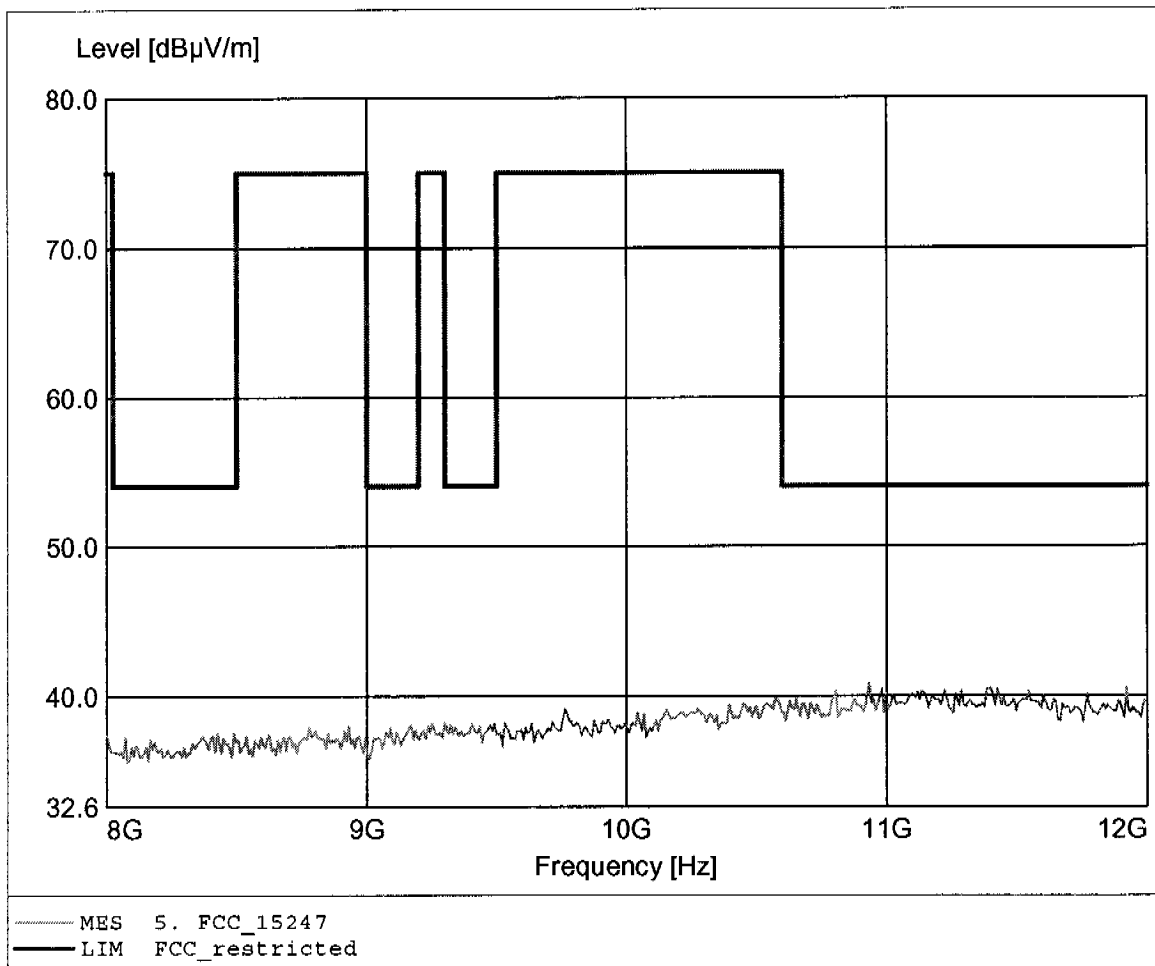

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset
Model: Jabra BT620s / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.70 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.535GHz, Emax: 41.40dBµV/m, RBW: 1MHz

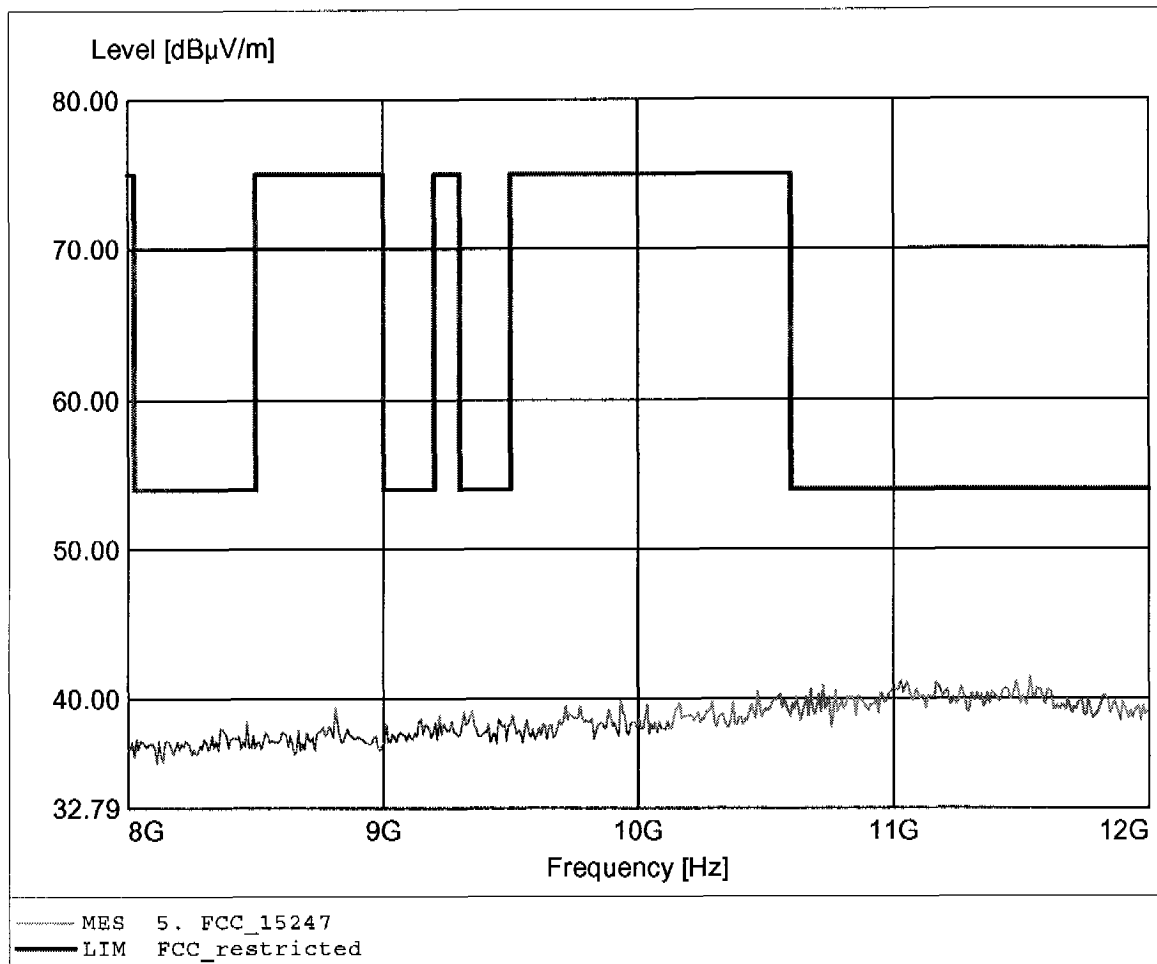

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset
Model: Jabra BT620s / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.70 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.625GHz, Emax: 43.55dBµV/m, RBW: 1MHz

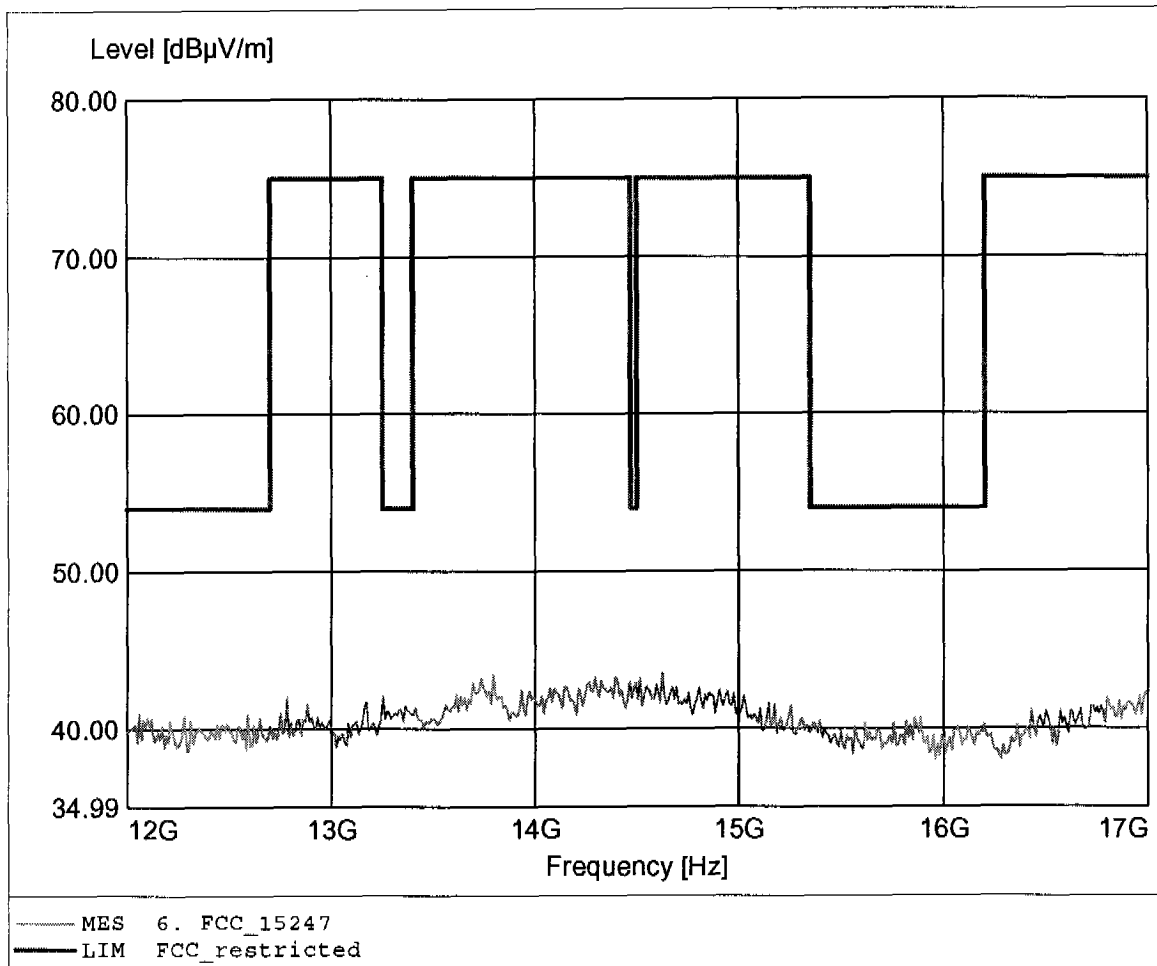

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset
Model: Jabra BT620s / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.70 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.505GHz, Emax: 43.94dBuV/m, RBW: 1MHz

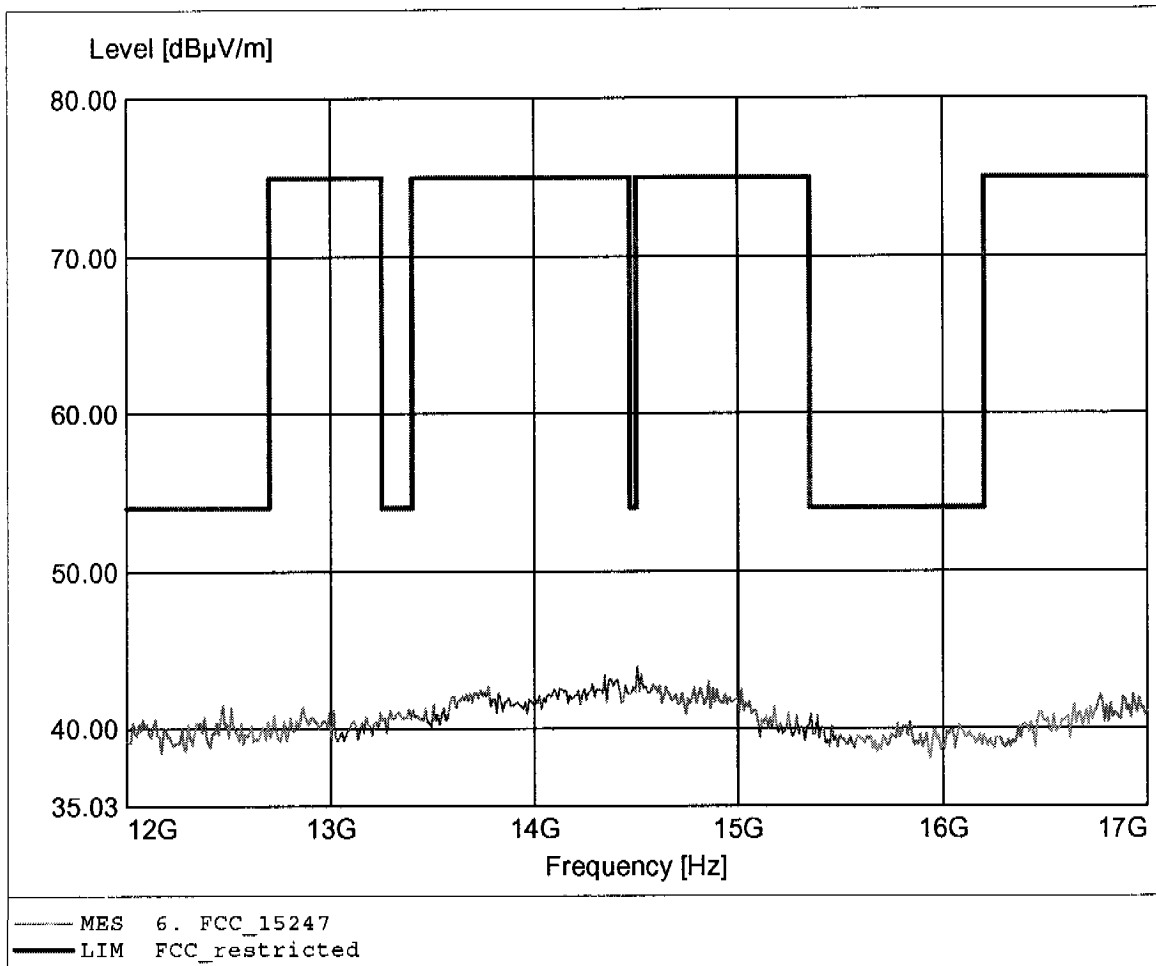

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset
Model: Jabra BT620s / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.70 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 44.80dBµV/m, RBW: 1MHz

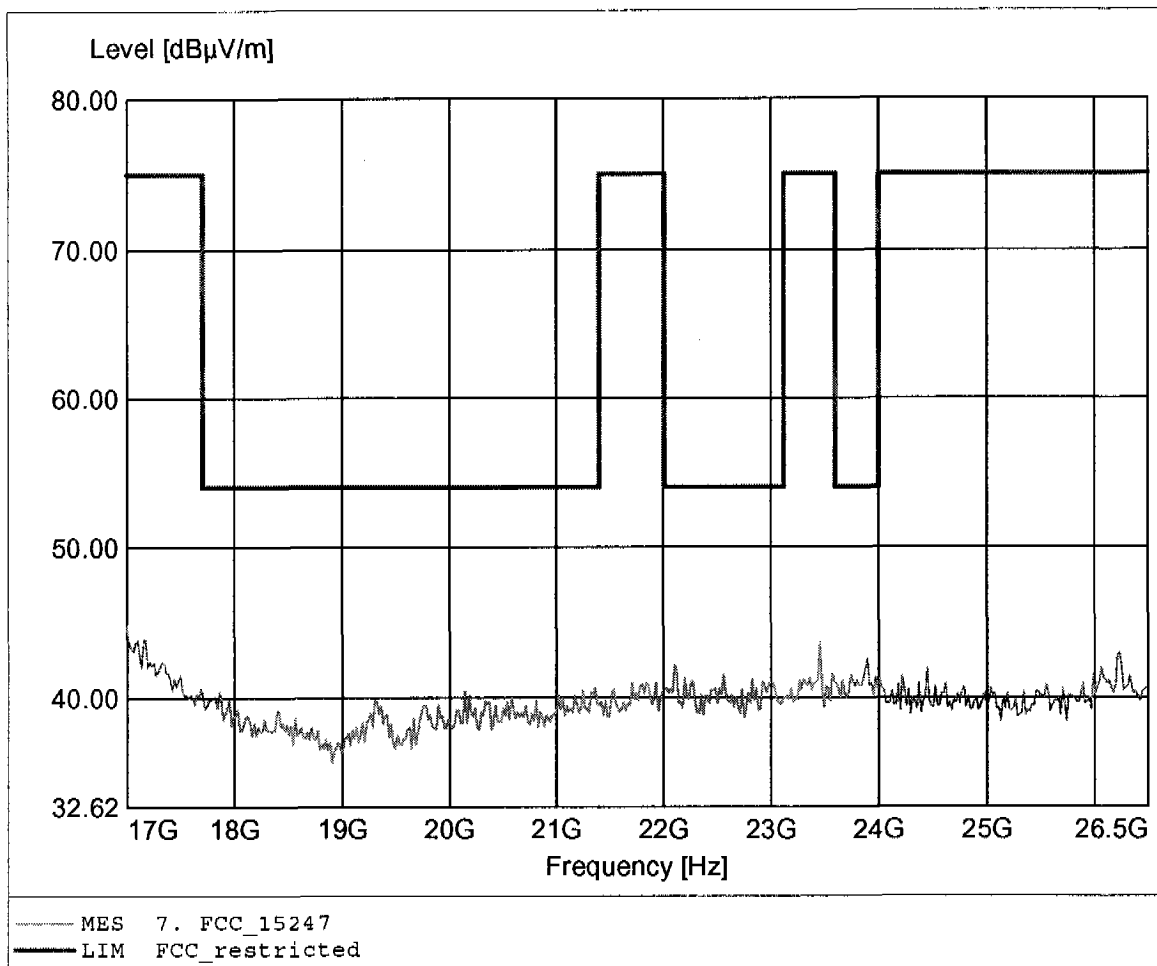

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset
Model: Jabra BT620s / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.70 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.133GHz, Emax: 44.13dBµV/m, RBW: 1MHz

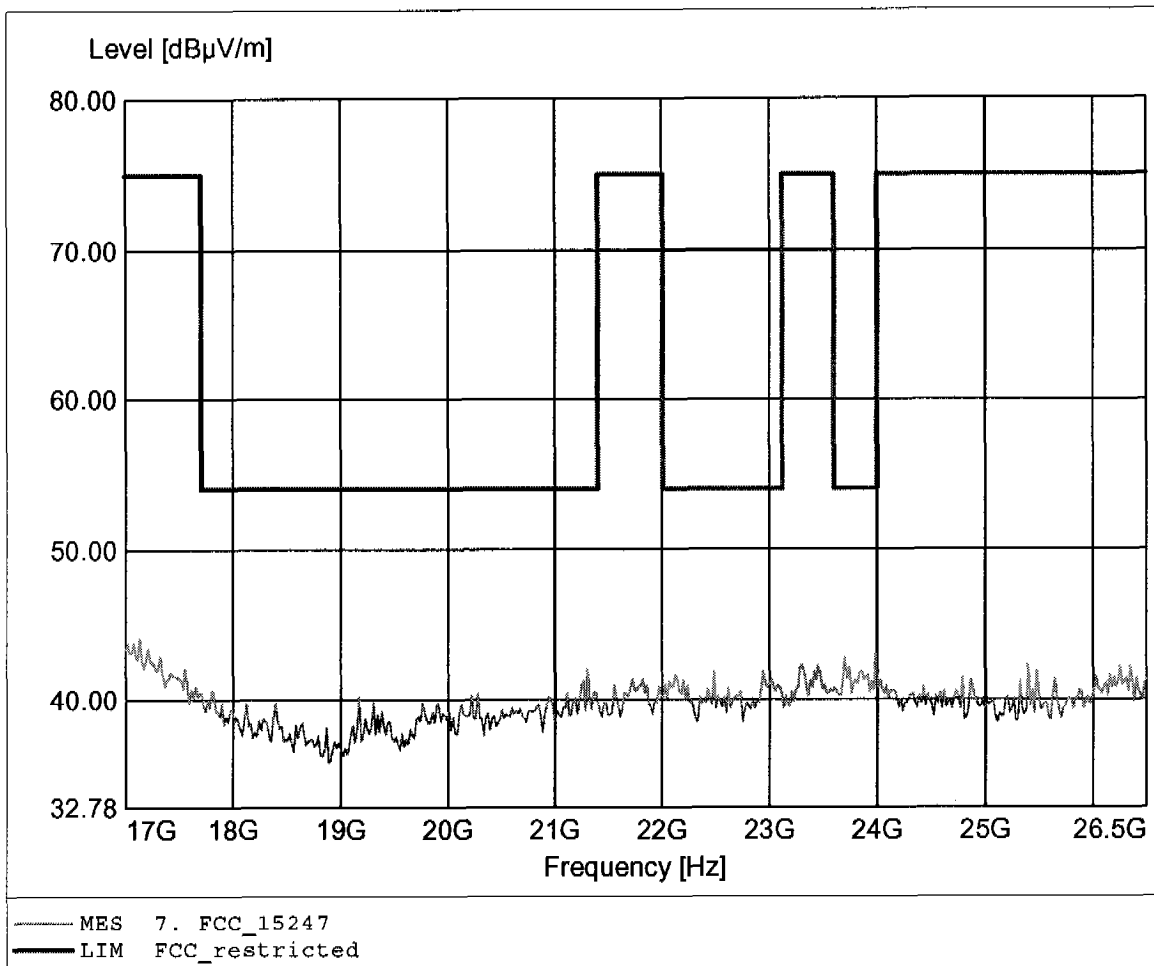

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset
Model: Jabra BT620s / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom= 3.70 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 197.956MHz, Emax: 32.51dBµV/m, RBW: 100kHz

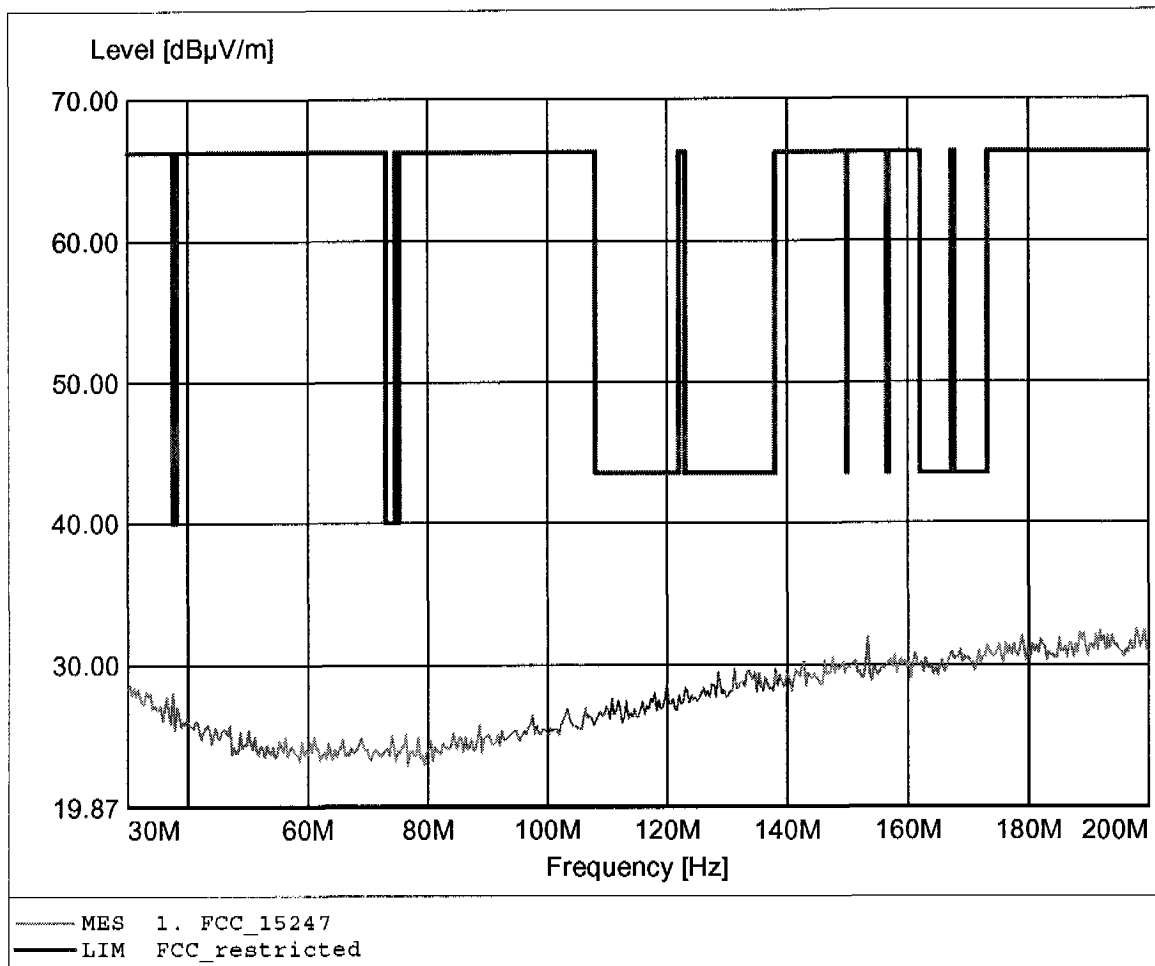

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset
Model: Jabra BT620s / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom= 3.70 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 198.637MHz, Emax: 32.80dBµV/m, RBW: 100kHz

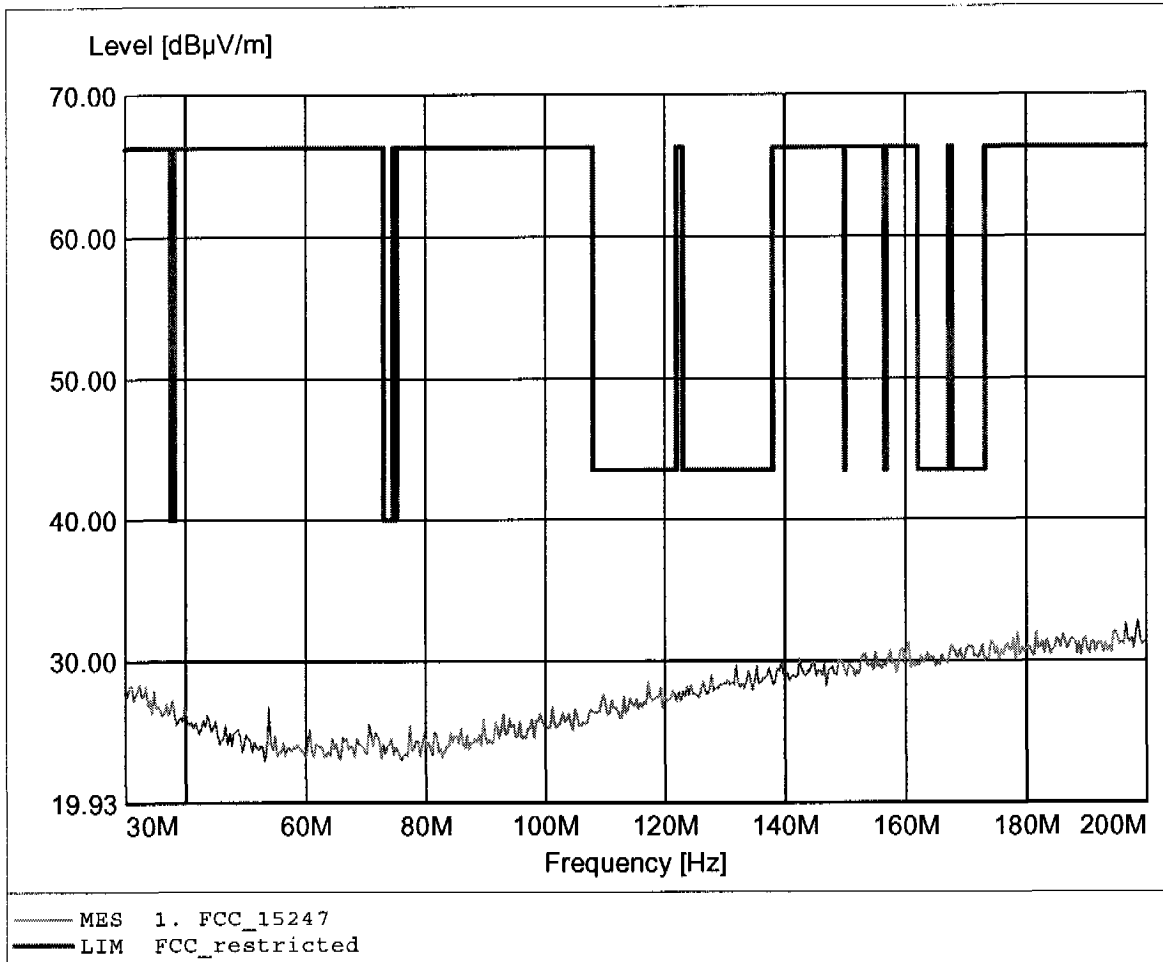

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset
Model: Jabra BT620s / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom= 3.70 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 814.028MHz, Emax: 33.35dBµV/m, RBW: 100kHz

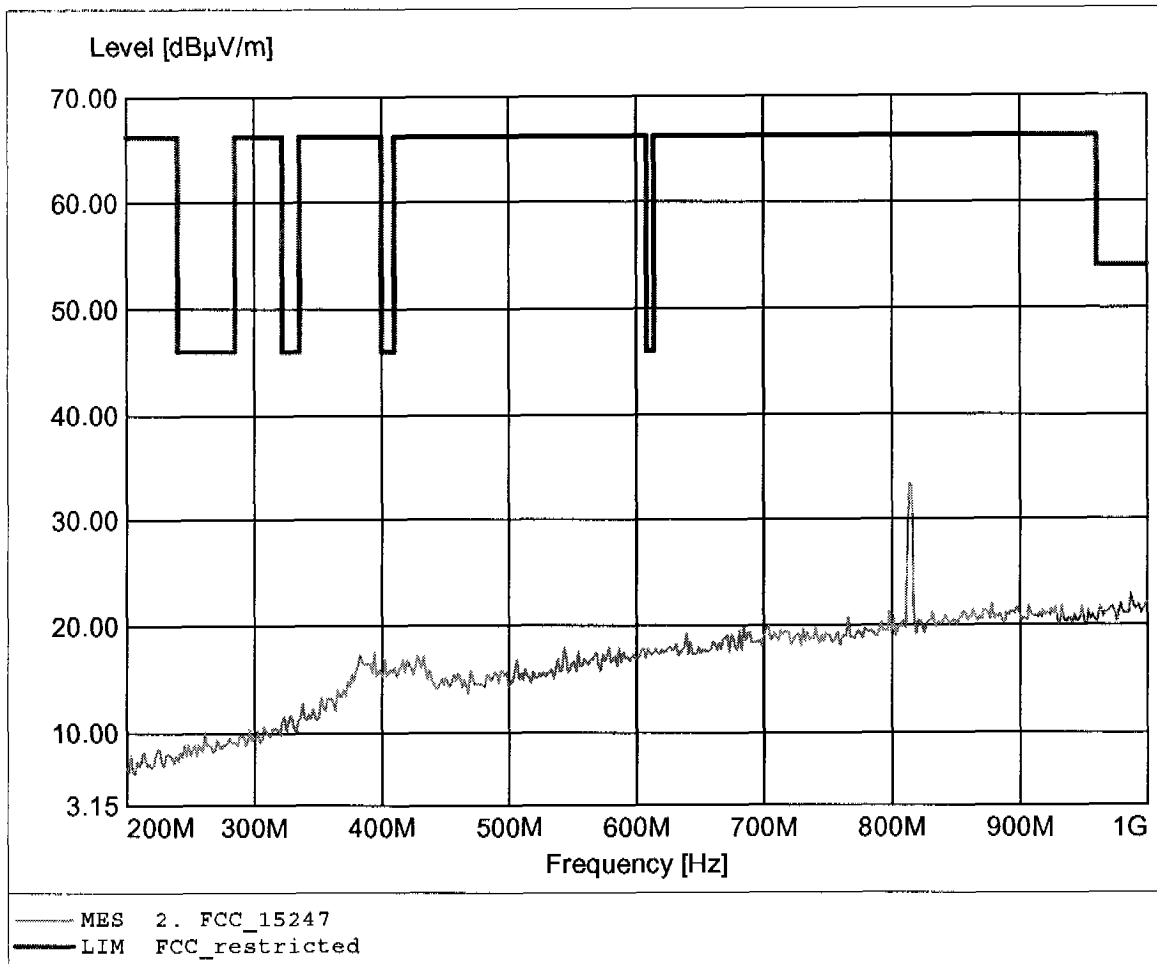

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset
Model: Jabra BT620s / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom= 3.70 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 815.631MHz, Emax: 31.14dBµV/m, RBW: 100kHz

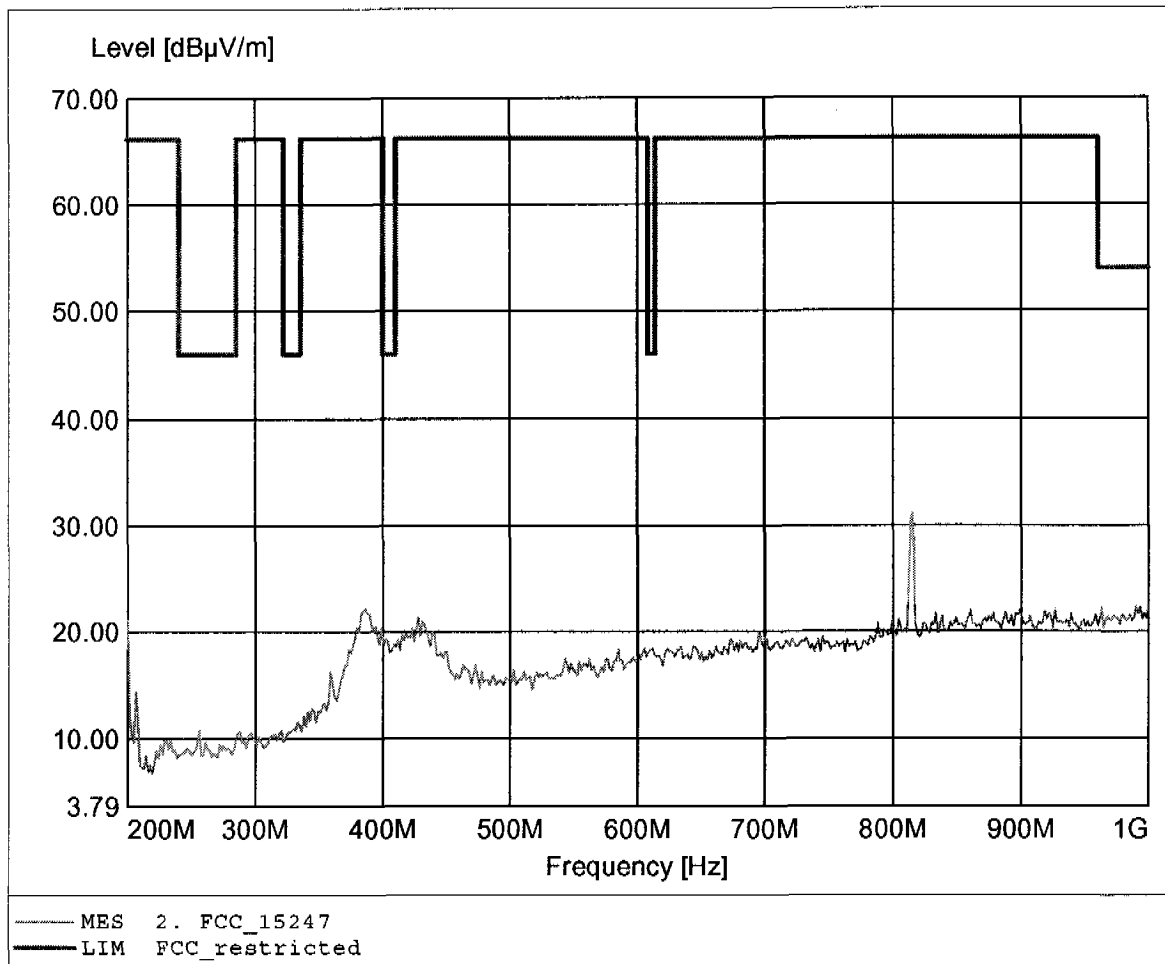

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset
Model: Jabra BT620s / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.70 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.918GHz, Emax: 42.91dBuV/m, RBW: 1MHz

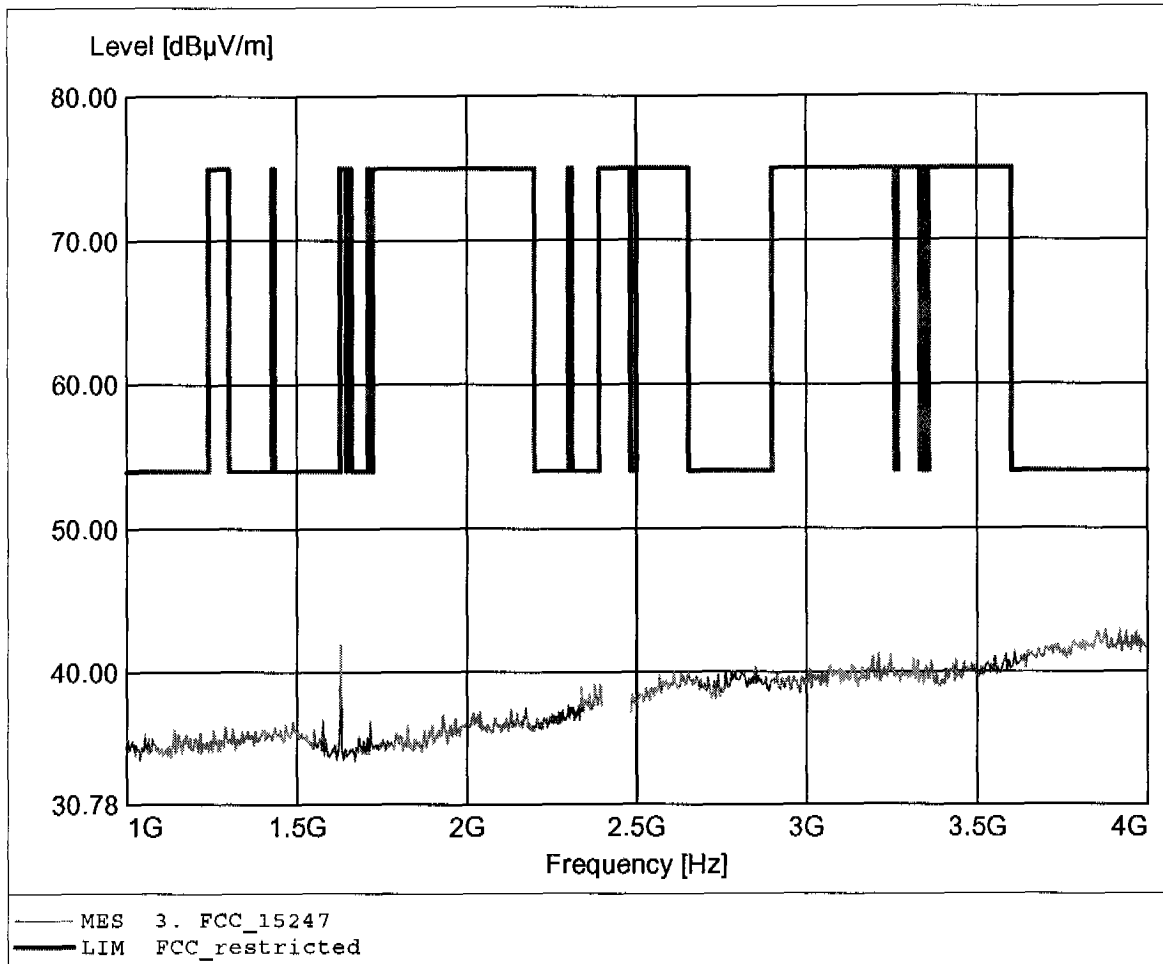

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset
Model: Jabra BT620s / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.70 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.906GHz, Emax: 43.15dBuV/m, RBW: 1MHz

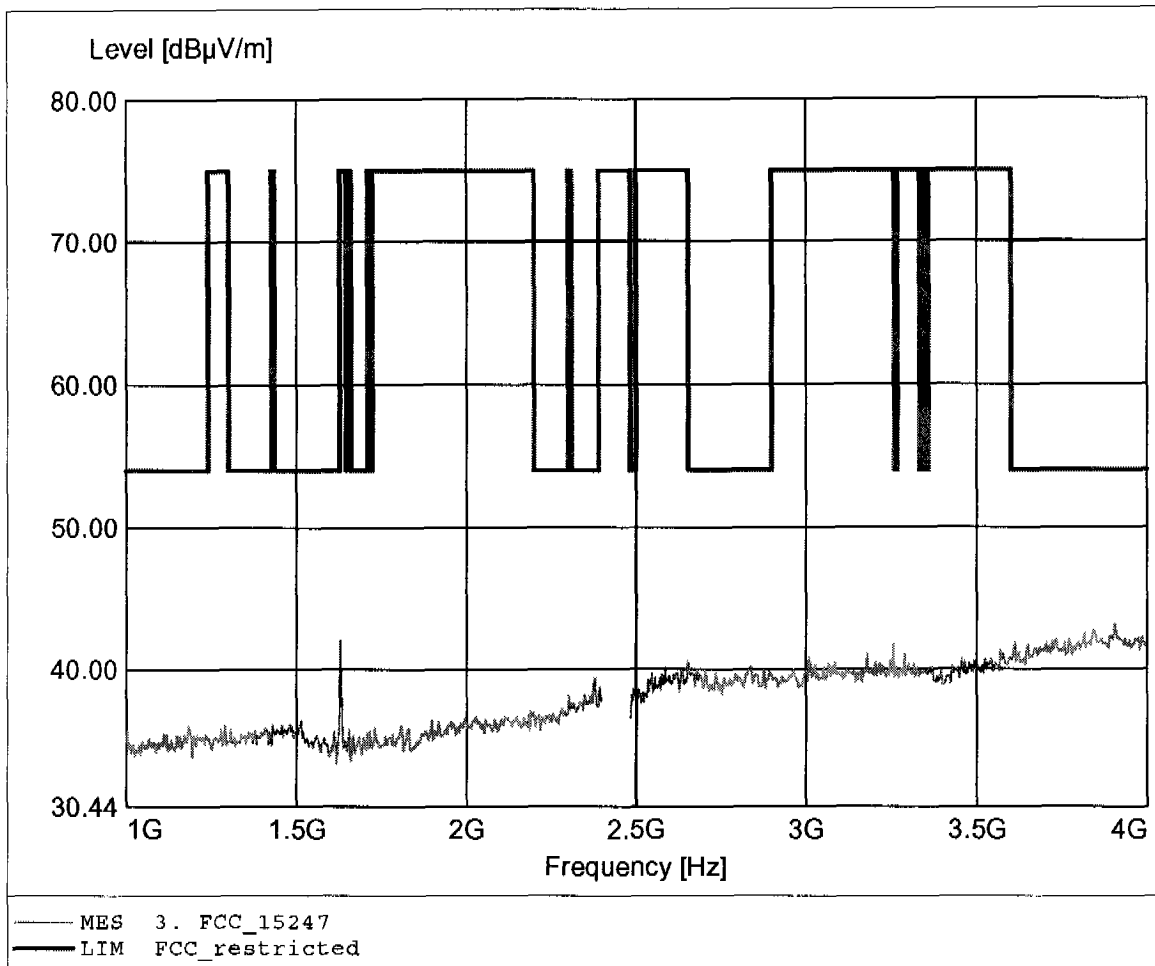

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset
Model: Jabra BT620s / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.70 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 41.05dBuV/m, RBW: 1MHz

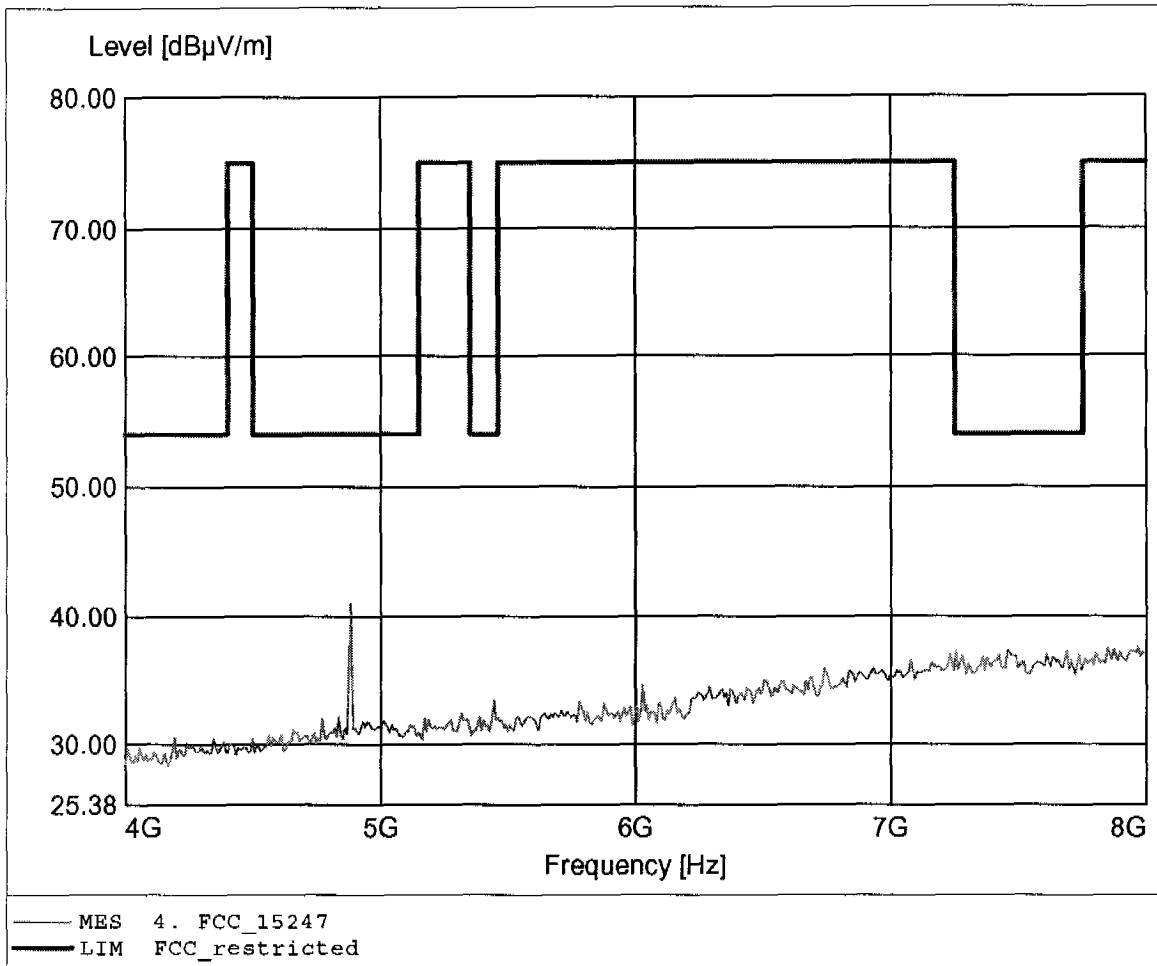

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset
Model: Jabra BT620s / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.70 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 41.36dBµV/m, RBW: 1MHz

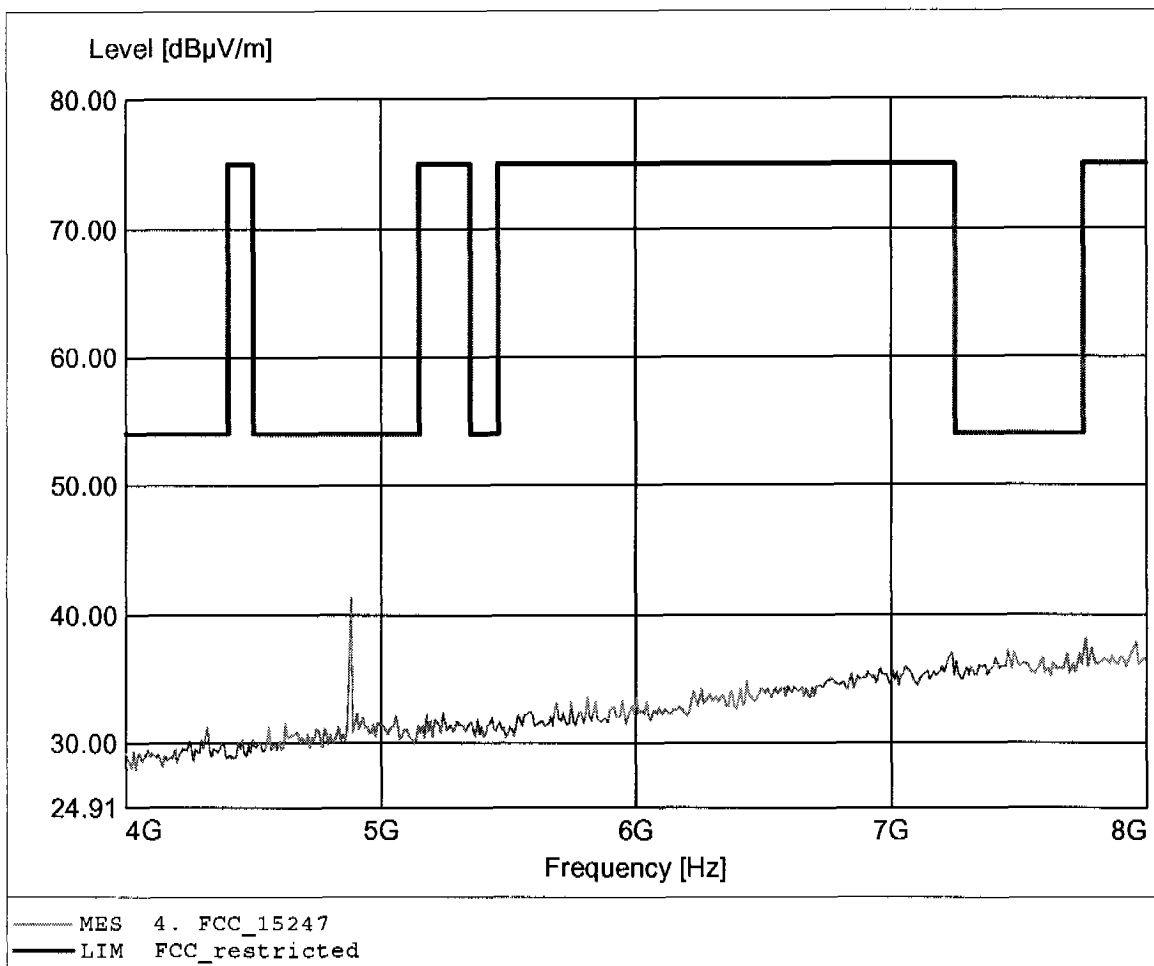

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset
Model: Jabra BT620s / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.70 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 10.950GHz, Emax: 42.17dBµV/m, RBW: 1MHz

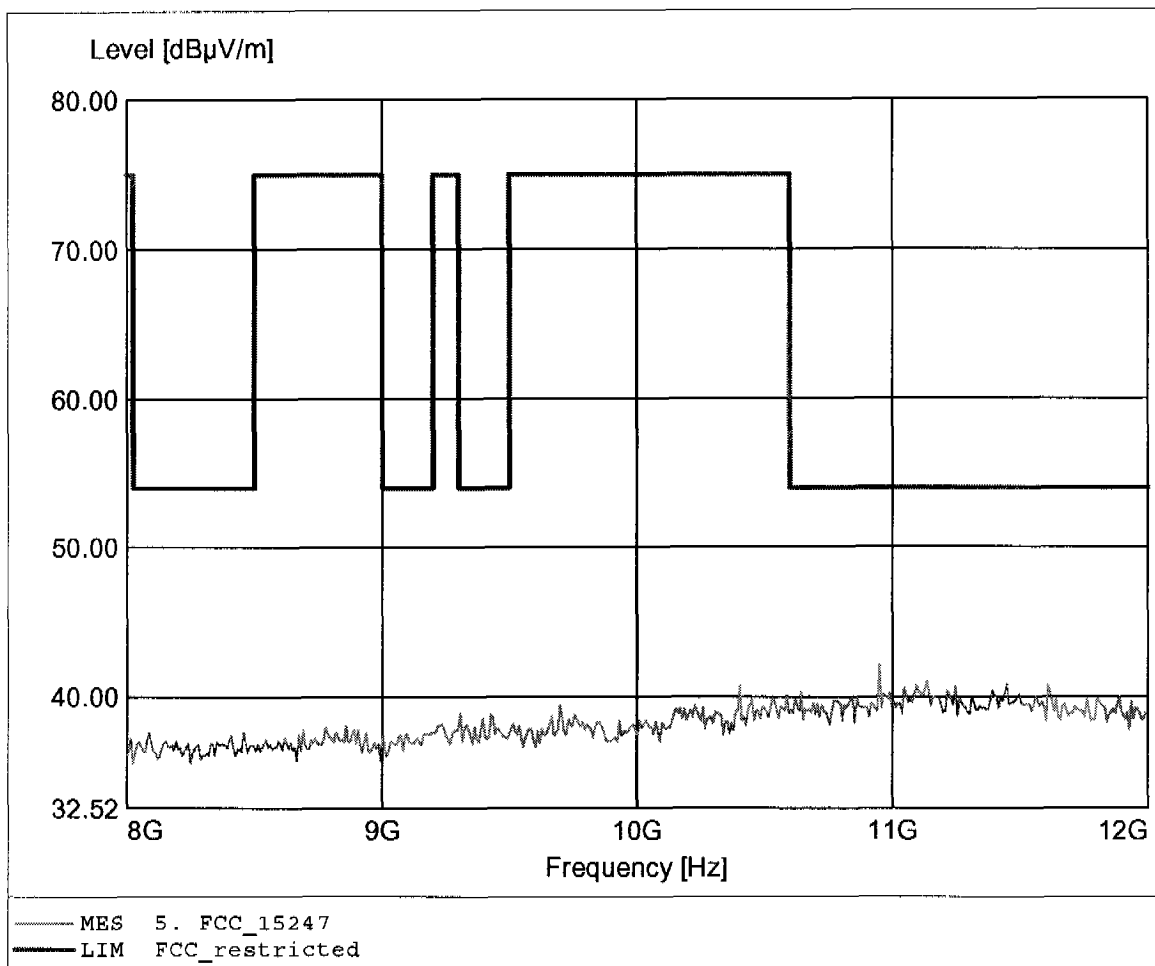

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset
Model: Jabra BT620s / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.70 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.150GHz, Emax: 40.71dBµV/m, RBW: 1MHz

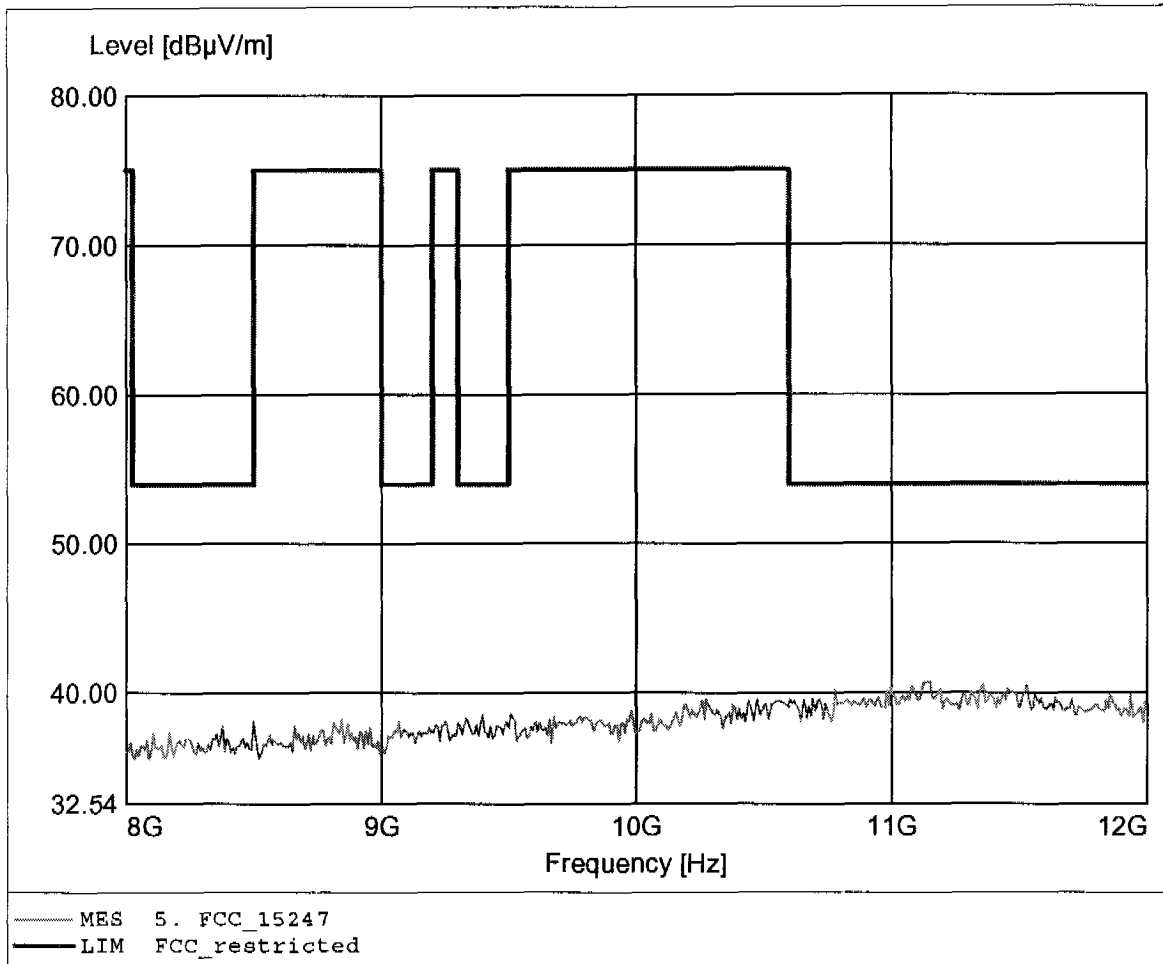

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset
Model: Jabra BT620s / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.70 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.275GHz, Emax: 43.99dBuV/m, RBW: 1MHz

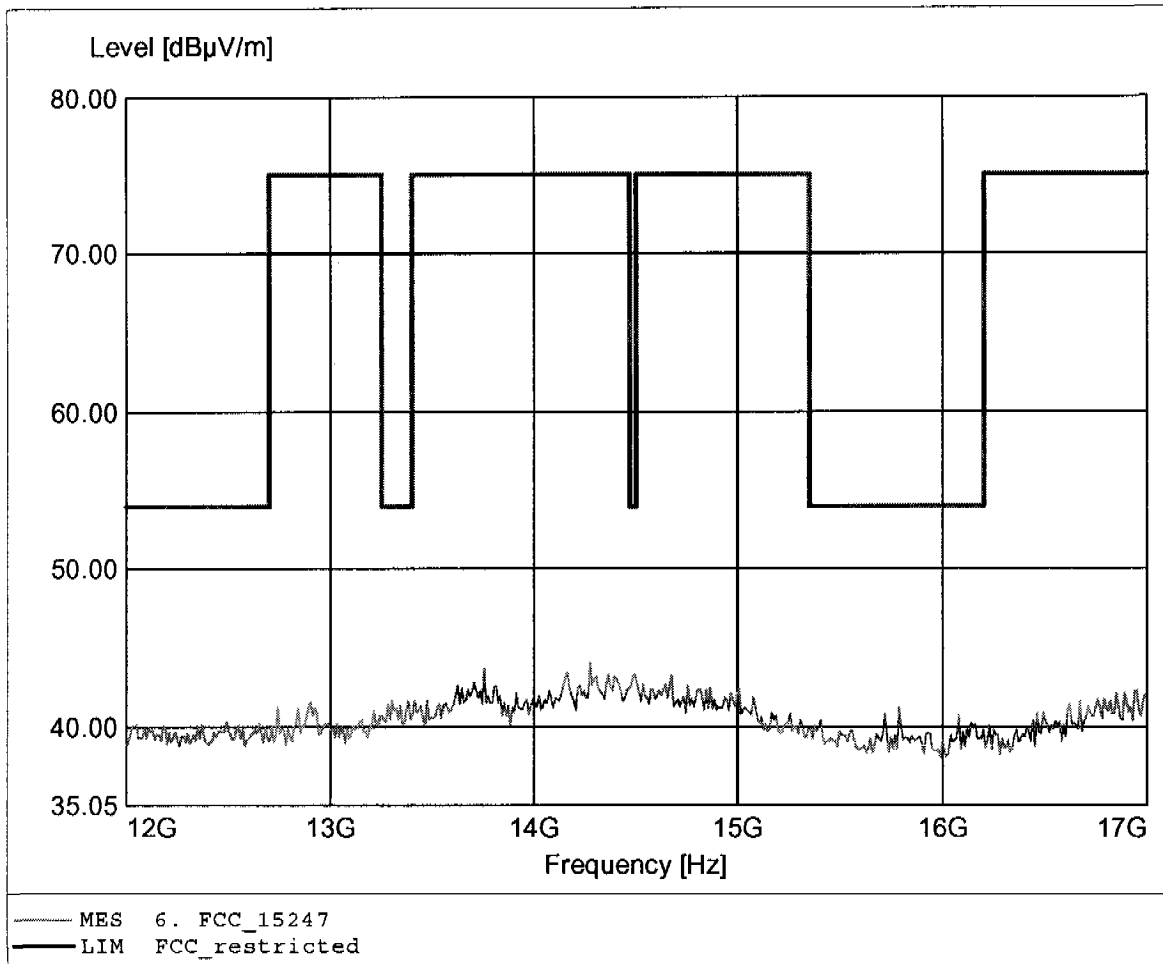

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset
Model: Jabra BT620s / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.70 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.335GHz, Emax: 43.47dBµV/m, RBW: 1MHz

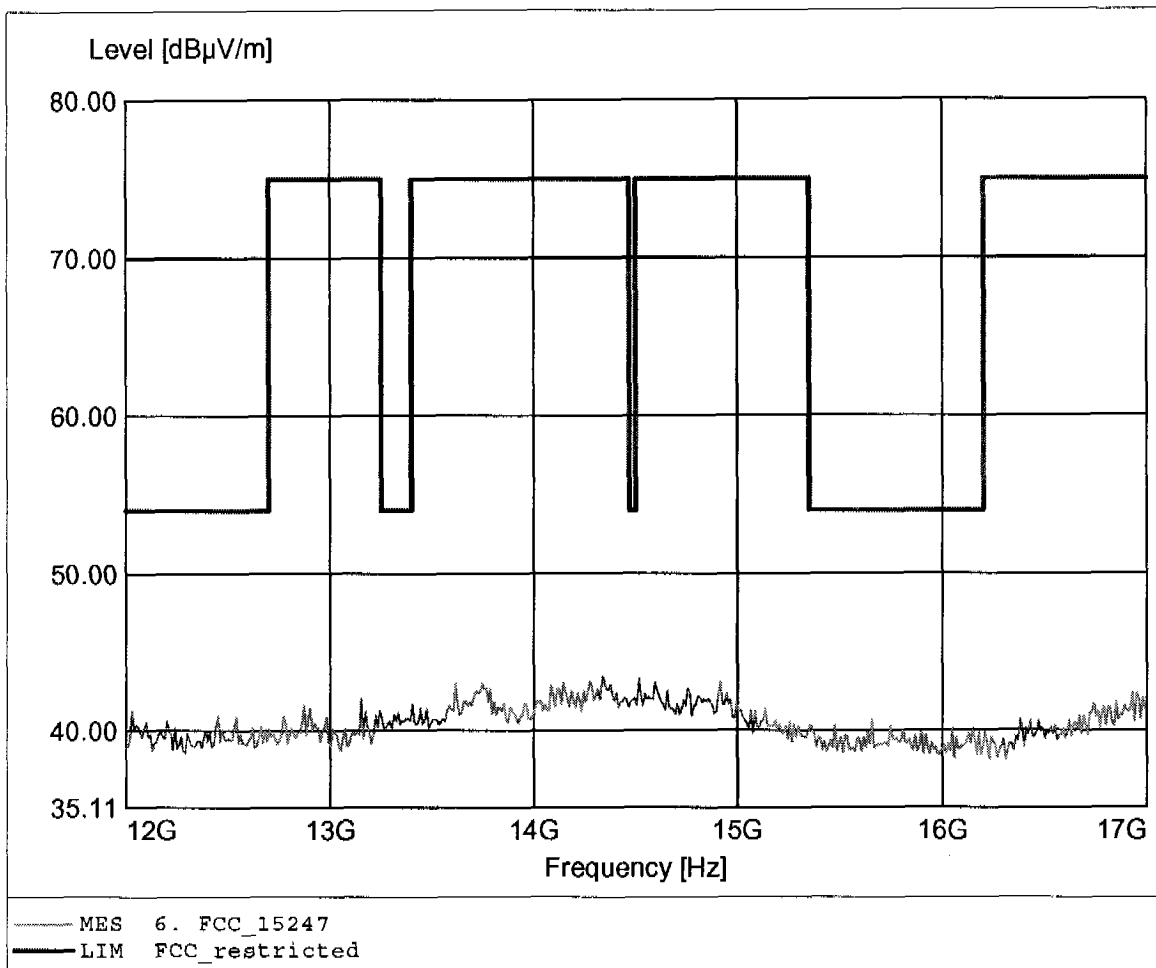

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset
Model: Jabra BT620s / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.70 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.038GHz, Emax: 43.85dBµV/m, RBW: 1MHz

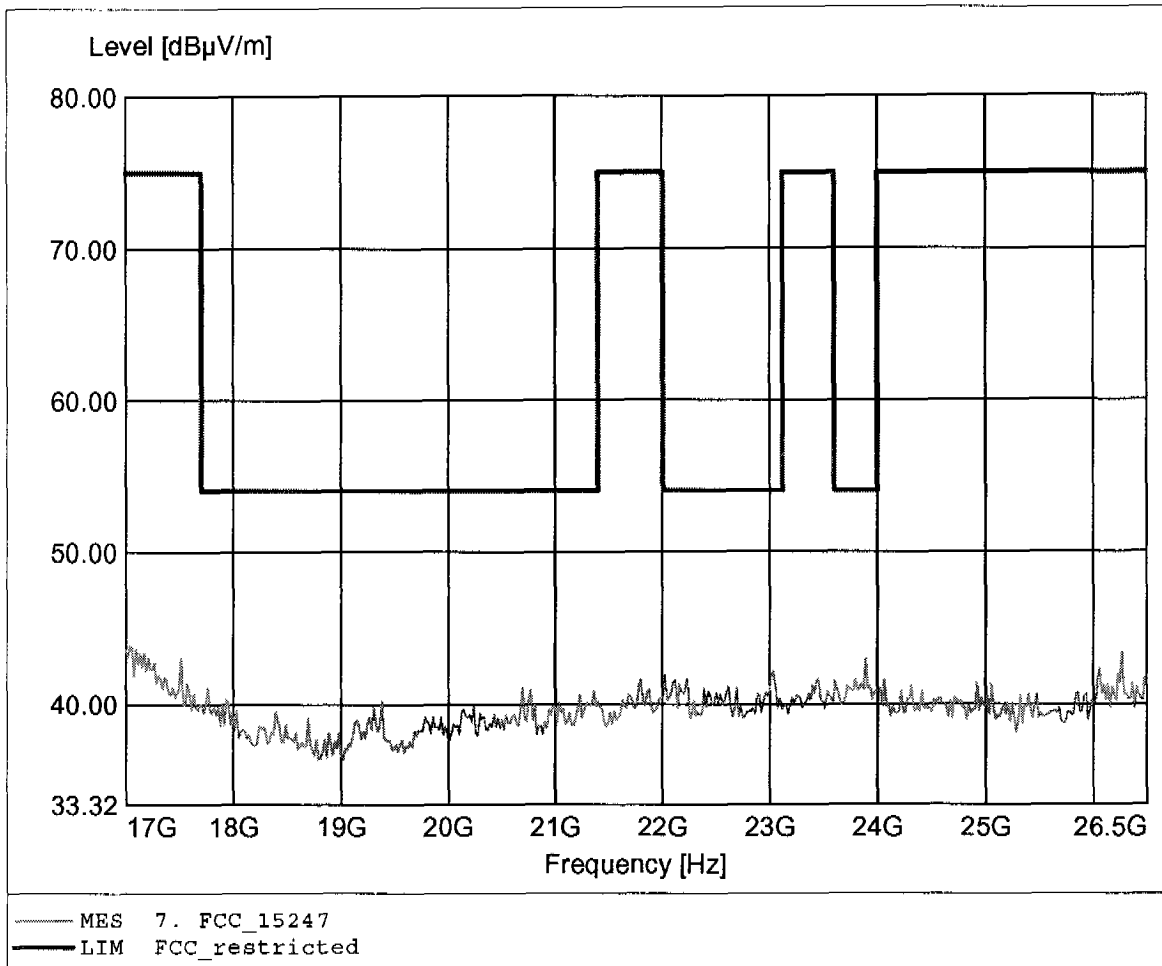

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset
Model: Jabra BT620s / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.70 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 44.08dBµV/m, RBW: 1MHz

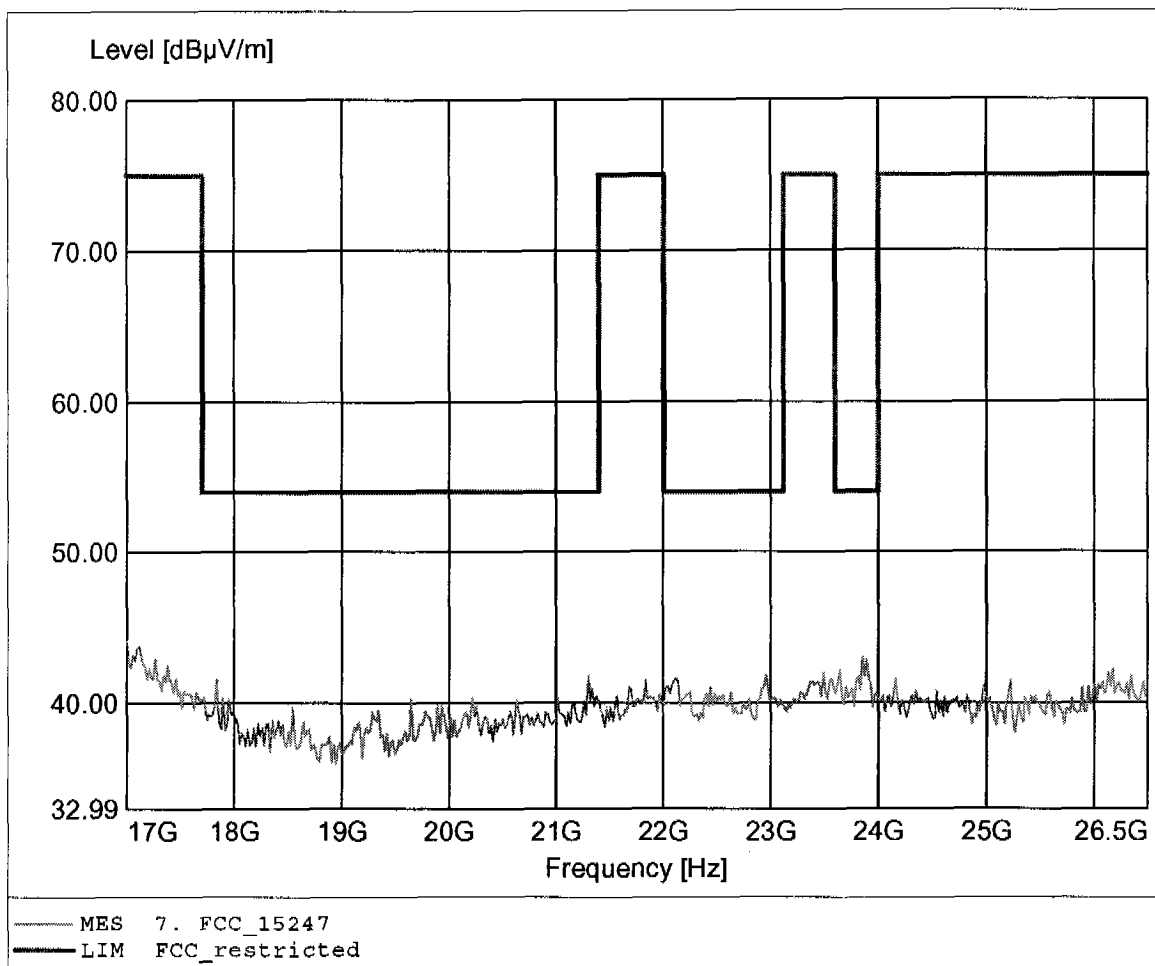

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset
Model: Jabra BT620s / 2480 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom= 3.70 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 198.978MHz, Emax: 33.10dBµV/m, RBW: 100kHz

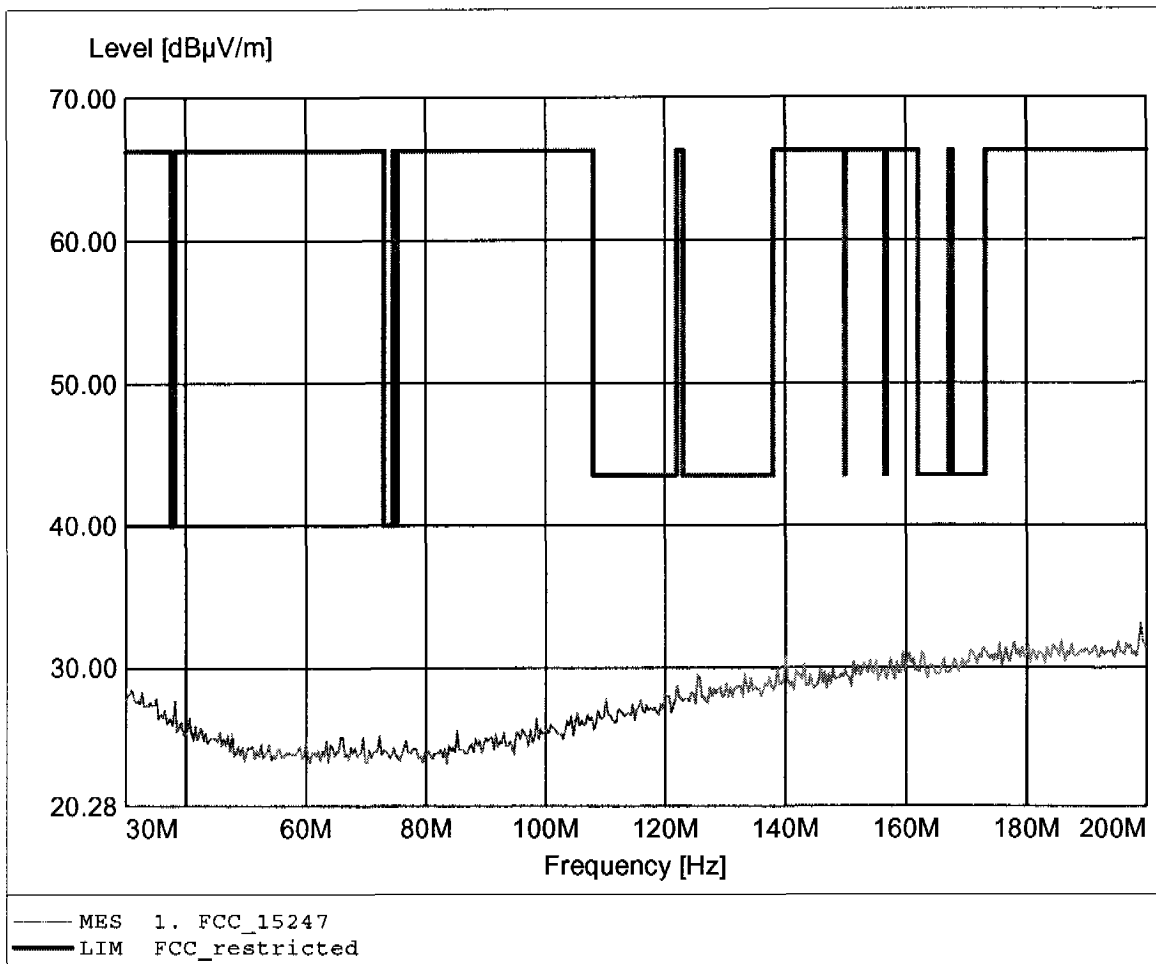

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset
Model: Jabra BT620s / 2480 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom= 3.70 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 186.713MHz, Emax: 33.04dBµV/m, RBW: 100kHz

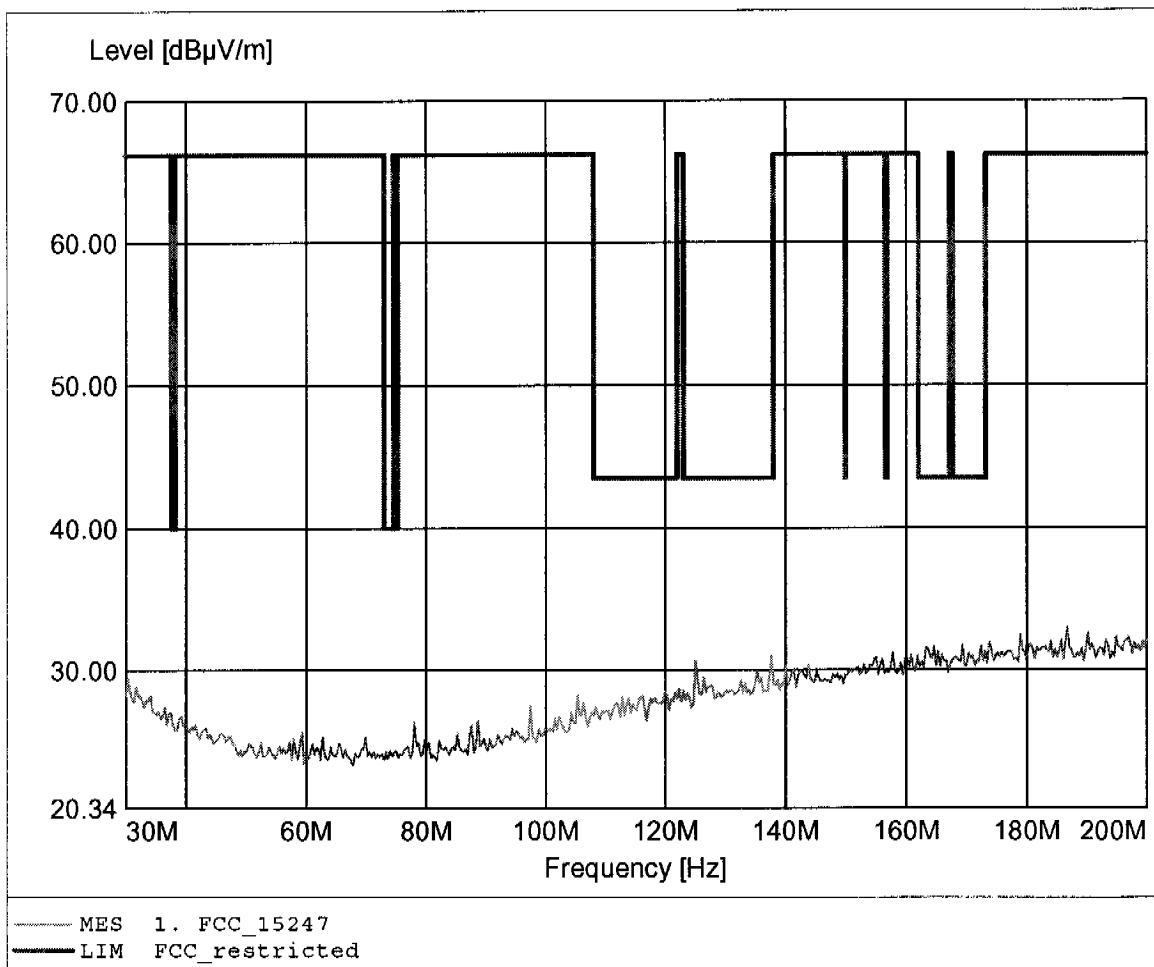

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset
Model: Jabra BT620s / 2480 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom= 3.70 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 828.457MHz, Emax: 43.21dBµV/m, RBW: 100kHz

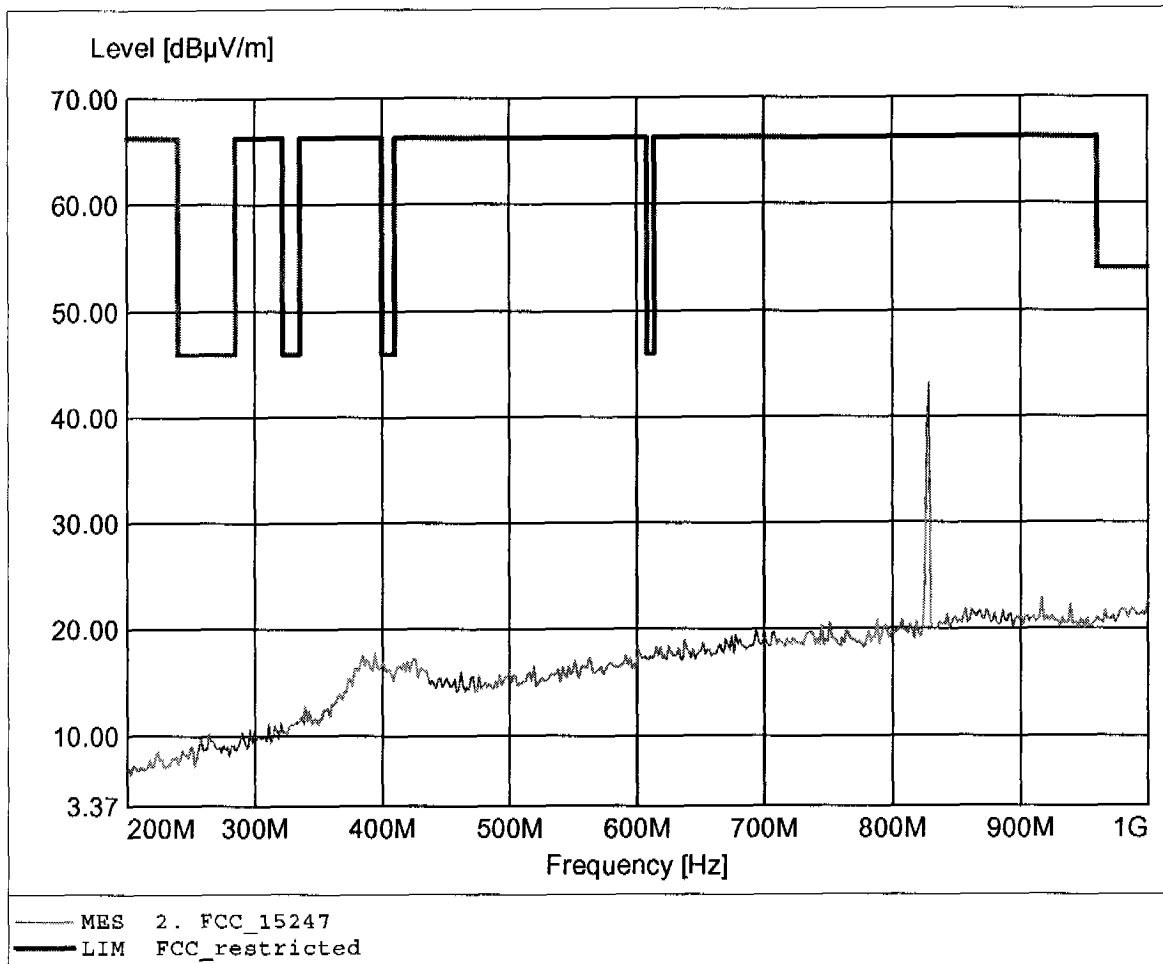

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset
Model: Jabra BT620s / 2480 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom= 3.70 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 828.457MHz, Emax: 44.24dBuV/m, RBW: 100kHz

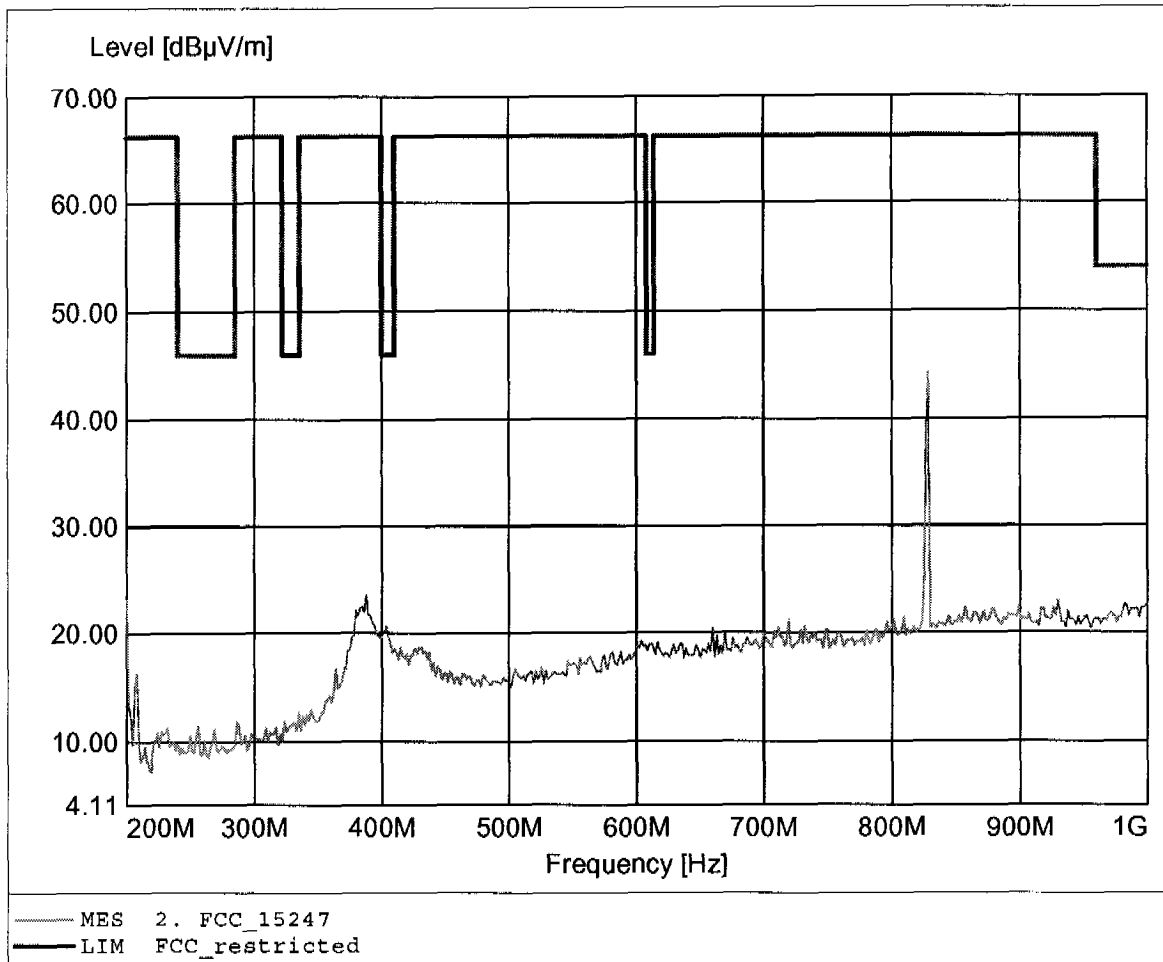

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset
Model: Jabra BT620s / 2480 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.70 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.772GHz, Emax: 46.47dBµV/m, RBW: 1MHz

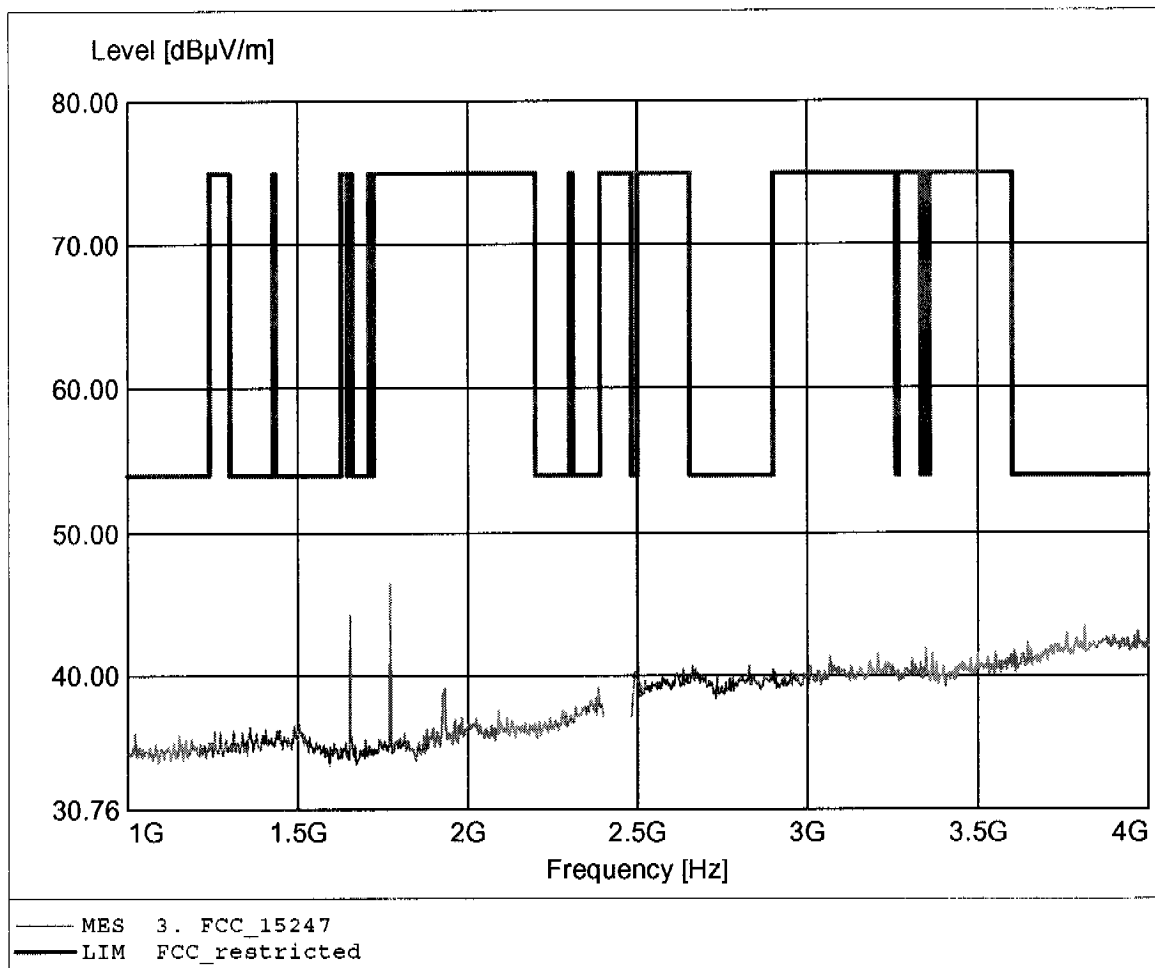

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset
Model: Jabra BT620s / 2480 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.70 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.654GHz, Emax: 45.21dBuV/m, RBW: 1MHz

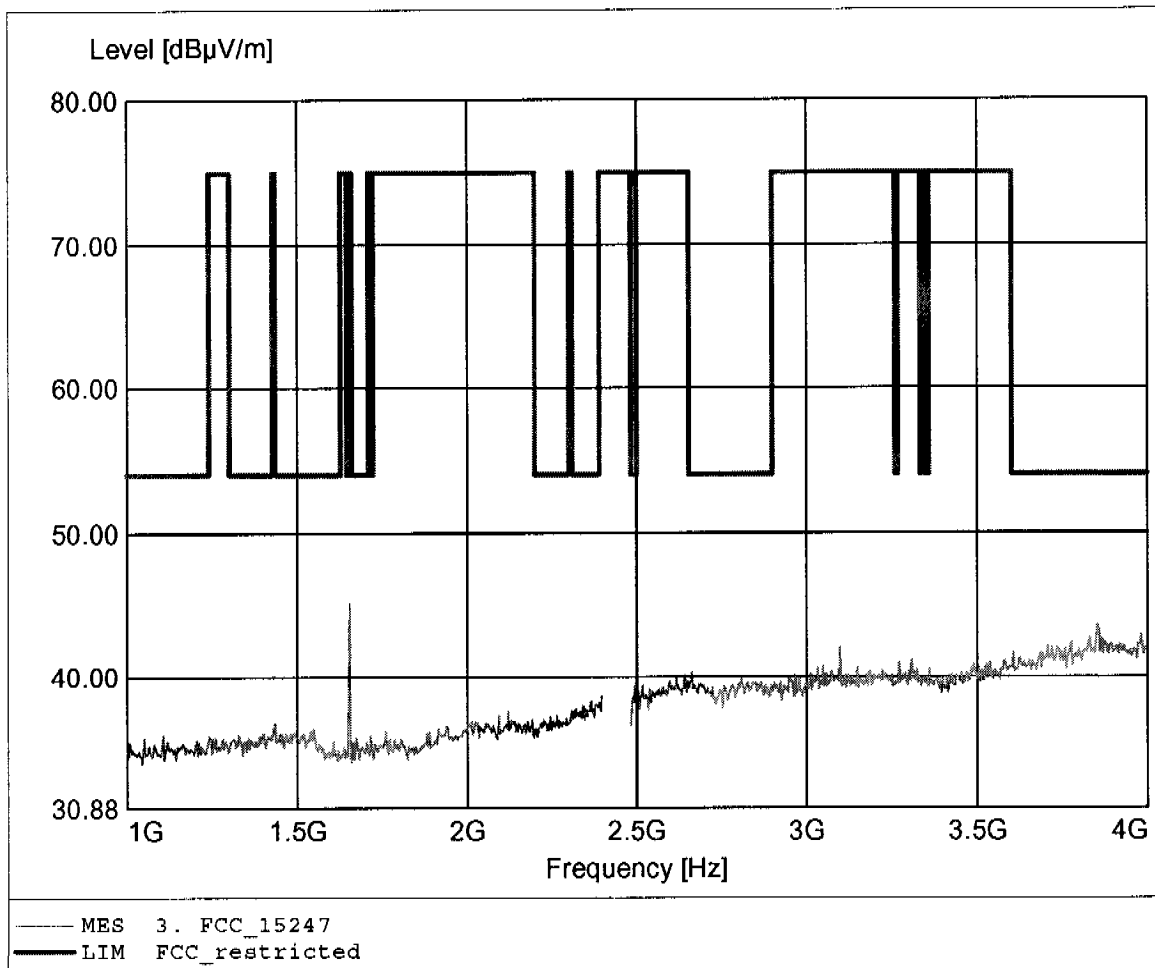

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset
Model: Jabra BT620s / 2480 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.70 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.992GHz, Emax: 38.24dBµV/m, RBW: 1MHz

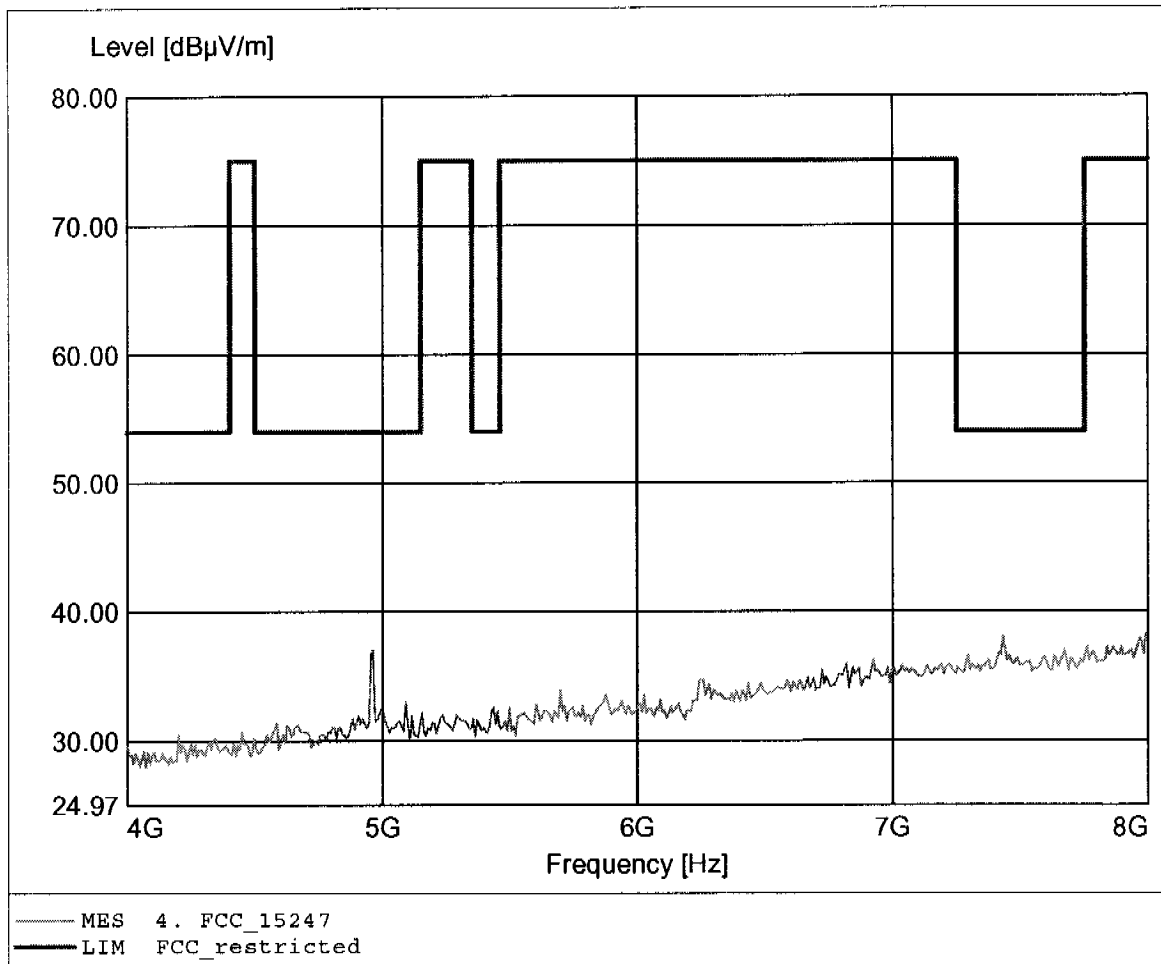

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset
Model: Jabra BT620s / 2480 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.70 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.962GHz, Emax: 40.80dBµV/m, RBW: 1MHz

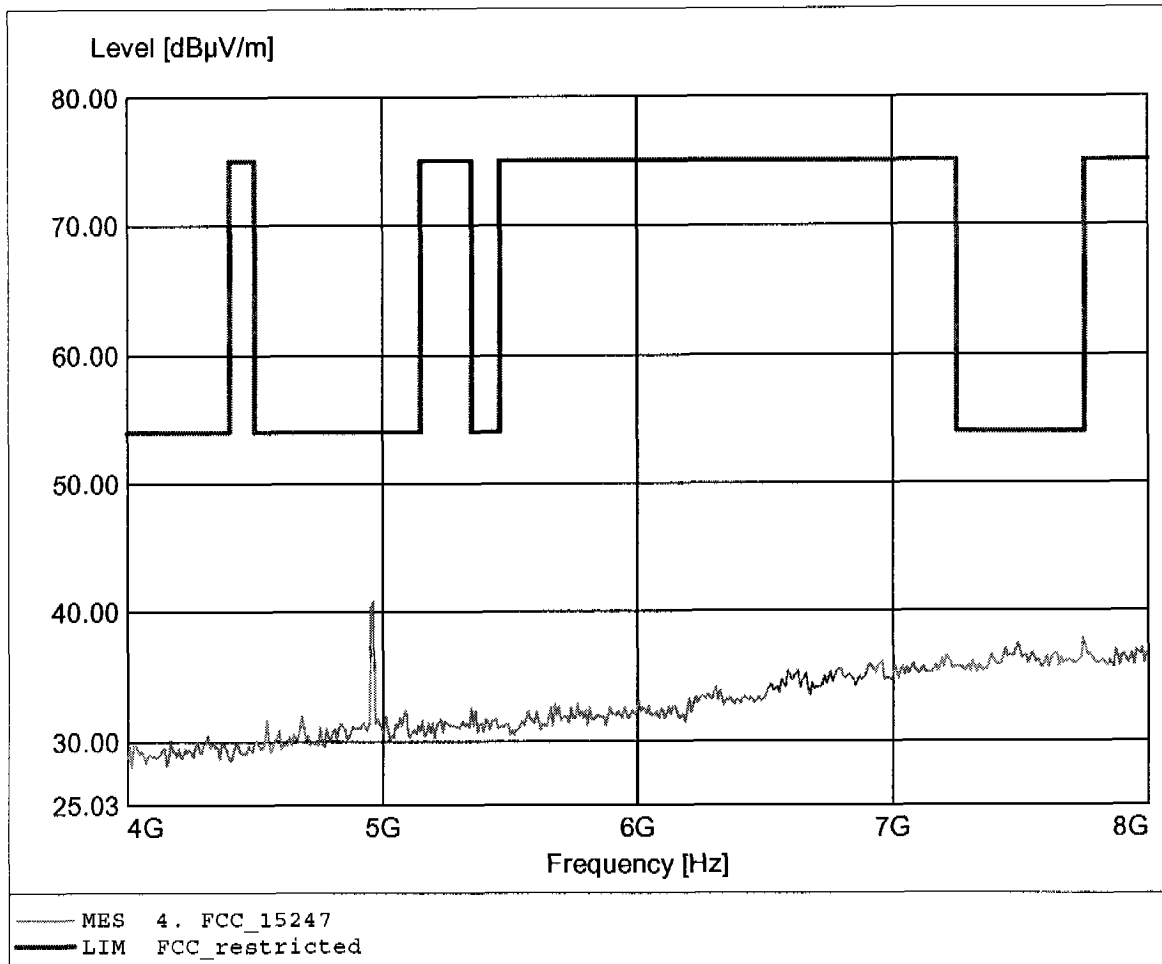

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset
Model: Jabra BT620s / 2480 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.70 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.062GHz, Emax: 40.92dBµV/m, RBW: 1MHz

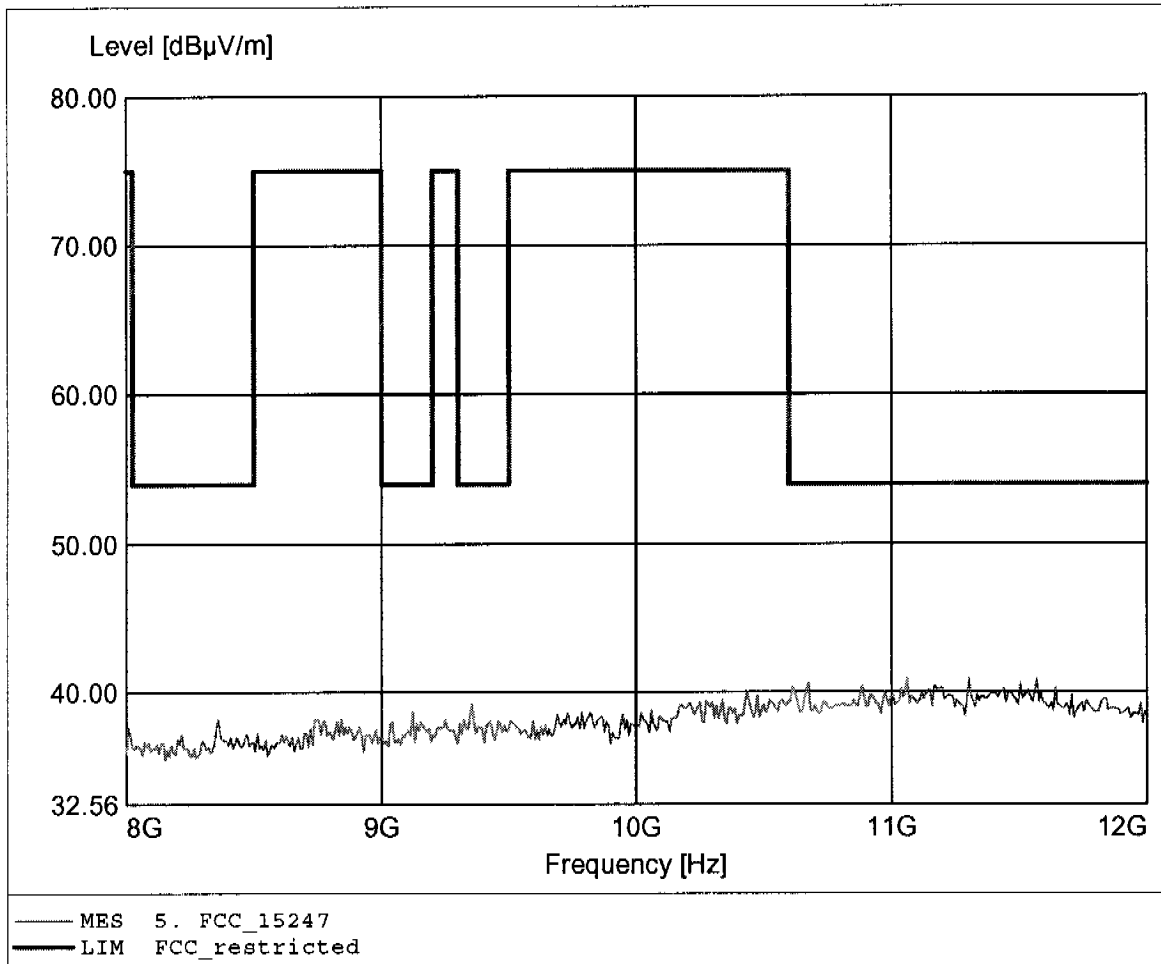

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset
Model: Jabra BT620s / 2480 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.70 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.375GHz, Emax: 40.84dBµV/m, RBW: 1MHz

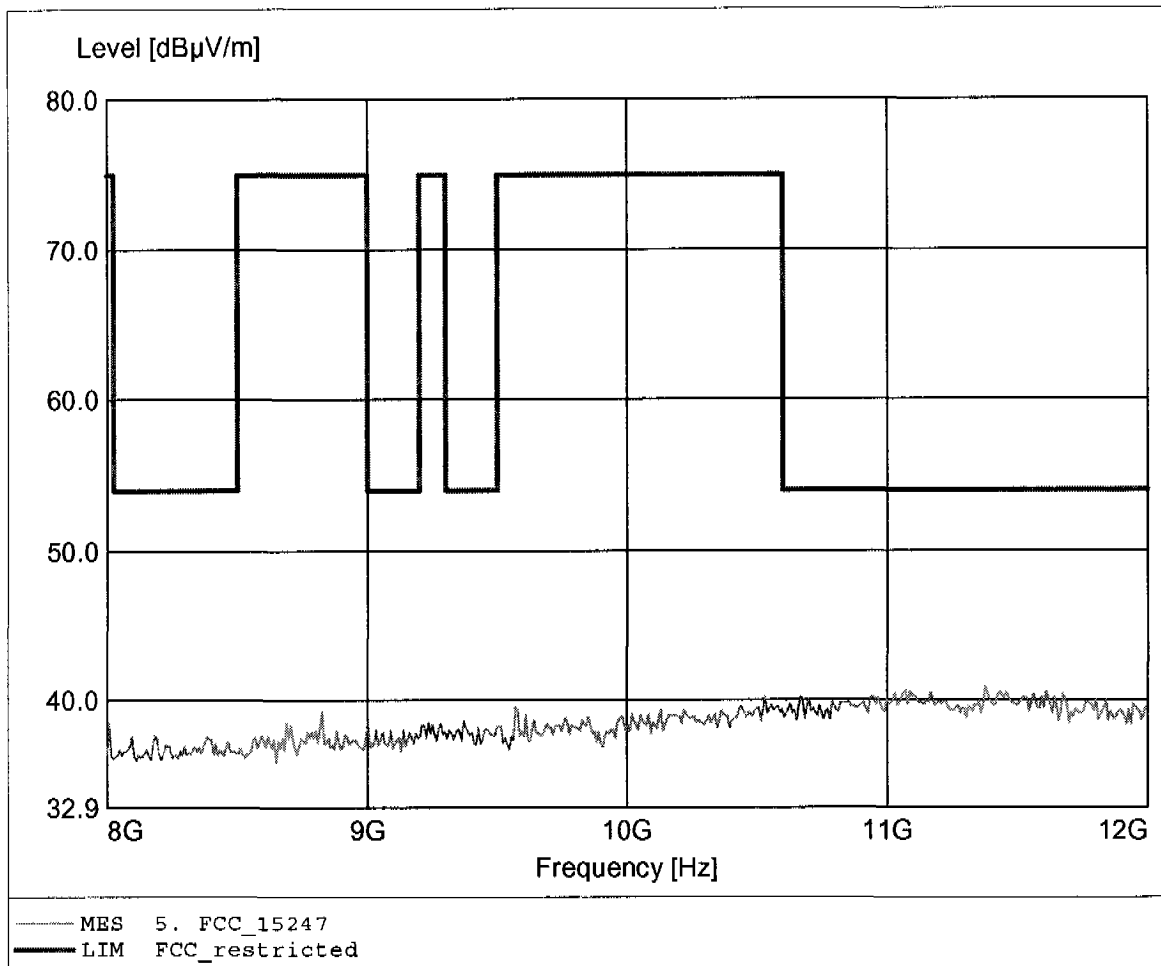

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset
Model: Jabra BT620s / 2480 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.70 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.154GHz, Emax: 43.90dBµV/m, RBW: 1MHz

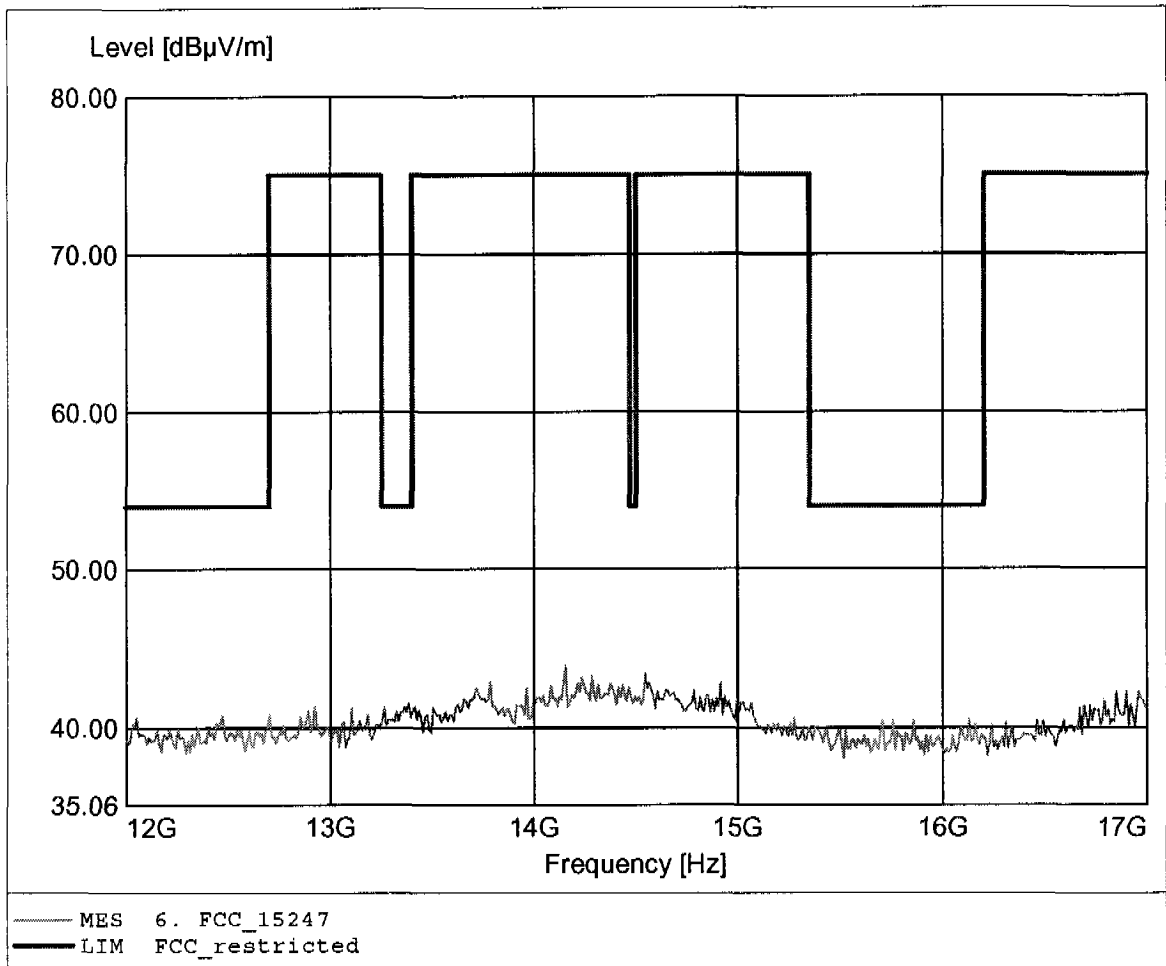

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset
Model: Jabra BT620s / 2480 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.70 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.375GHz, Emax: 43.63dBμV/m, RBW: 1MHz

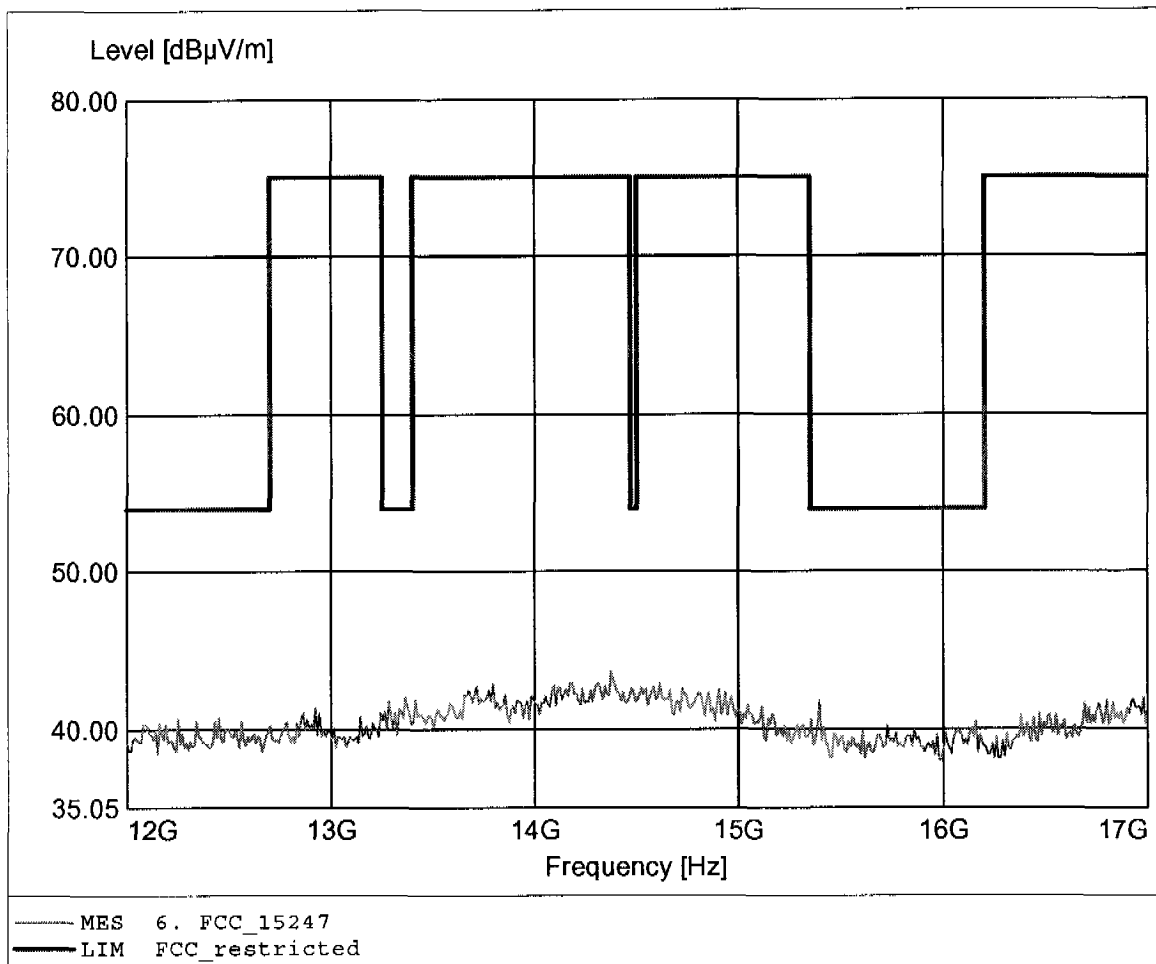

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset
Model: Jabra BT620s / 2480 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.70 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HLO25, amplif.
Comment 2: Freq: 17.152GHz, Emax: 43.88dBµV/m, RBW: 1MHz

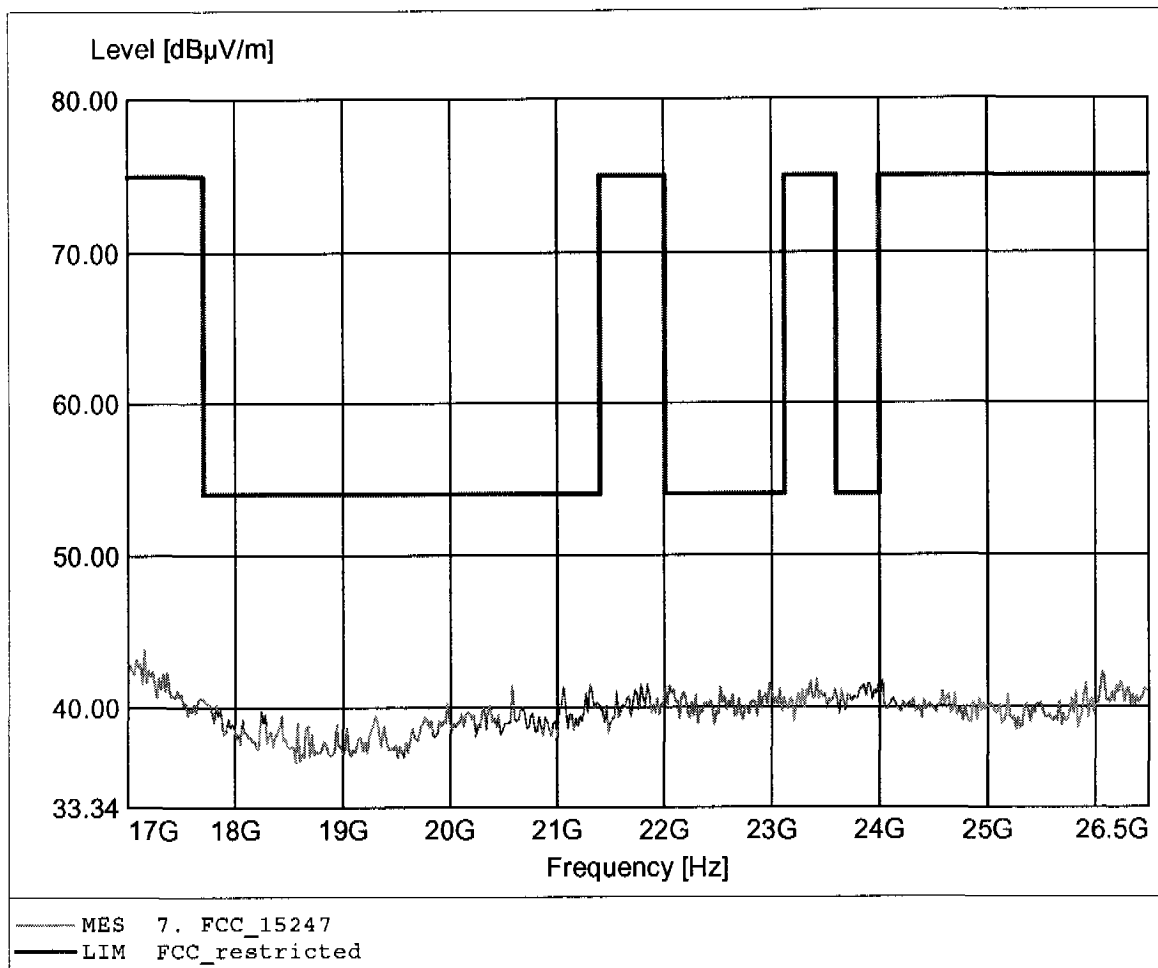

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C

Approval Holder: GN Netcom
EUT: Bluetooth Headset
Model: Jabra BT620s / 2480 MHz
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.70 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.114GHz, Emax: 44.87dBuV/m, RBW: 1MHz

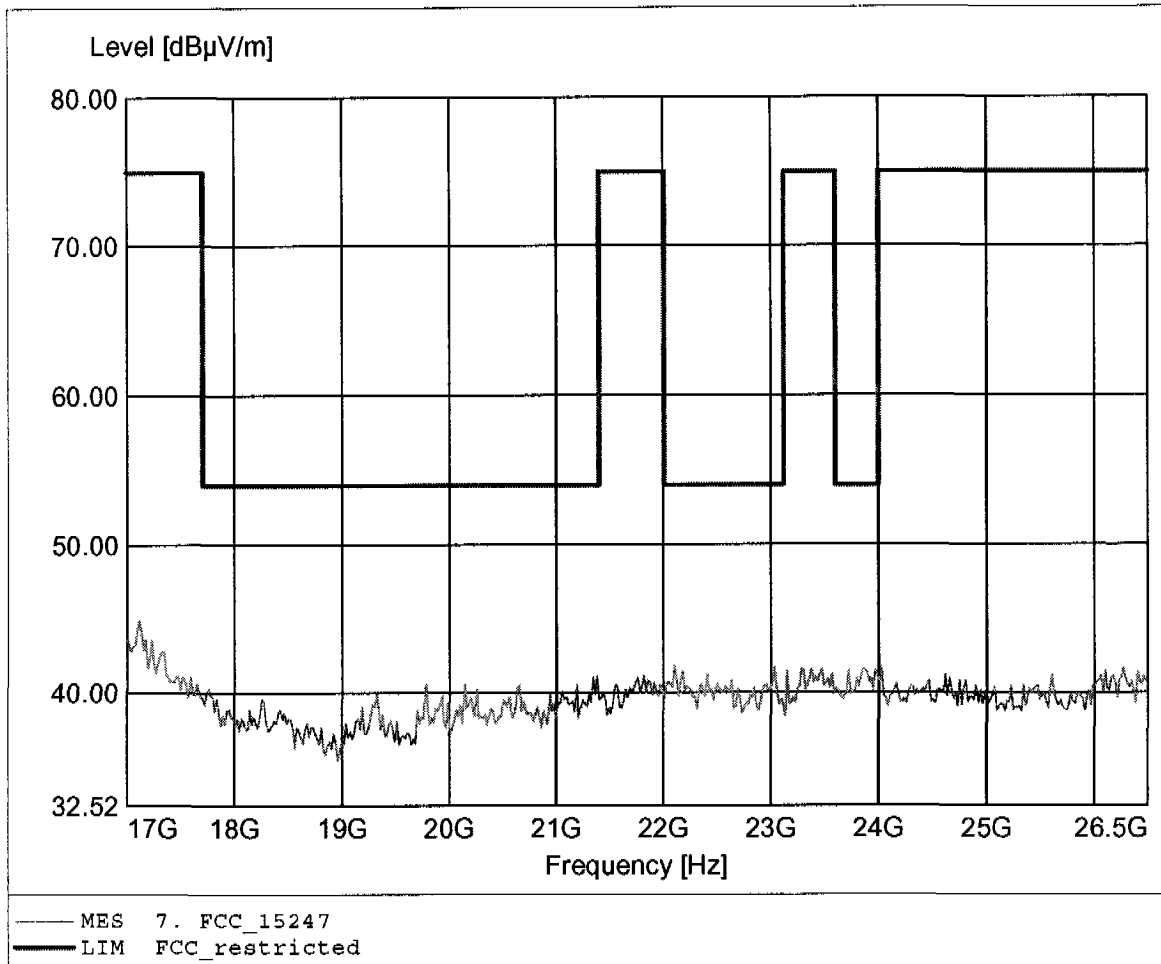



Appendix D

Spurious Emissions conducted - Transmitter operating




Appendix E

Carrier Frequency Separation



Delta 1 [T1] RBW 100 kHz RF Att 40 dB
Ref Lvl -0.02 dB VBW 100 kHz
15 dBm 1.00080160 MHz SWT 5 ms Unit dBm

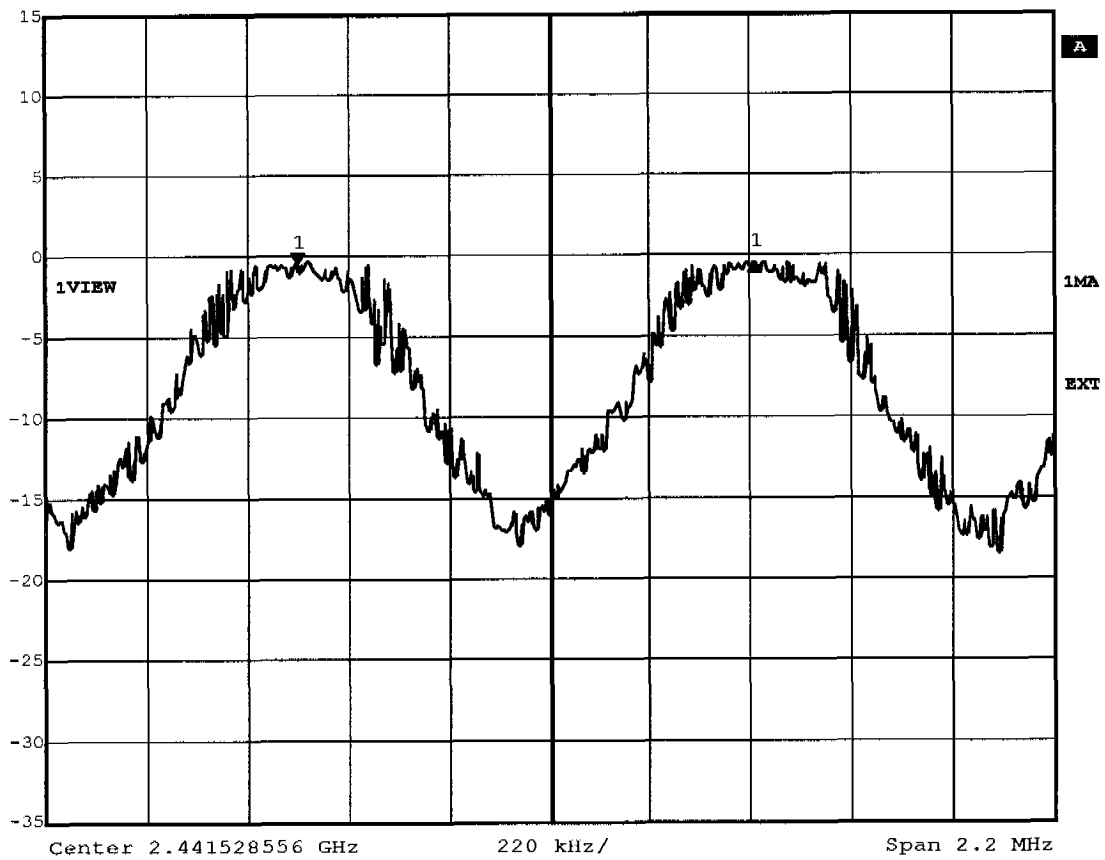

Title: Carrier Frequency Separation
Comment A: Jabra BT620s
Date: 12.SEP.2005 14:12:40




Appendix F

Number of Hopping Frequencies




Ref Lvl 25 dBm
REW 300 kHz RF Att 50 dB
VBW 300 kHz
SWT 5 ms Unit dBm

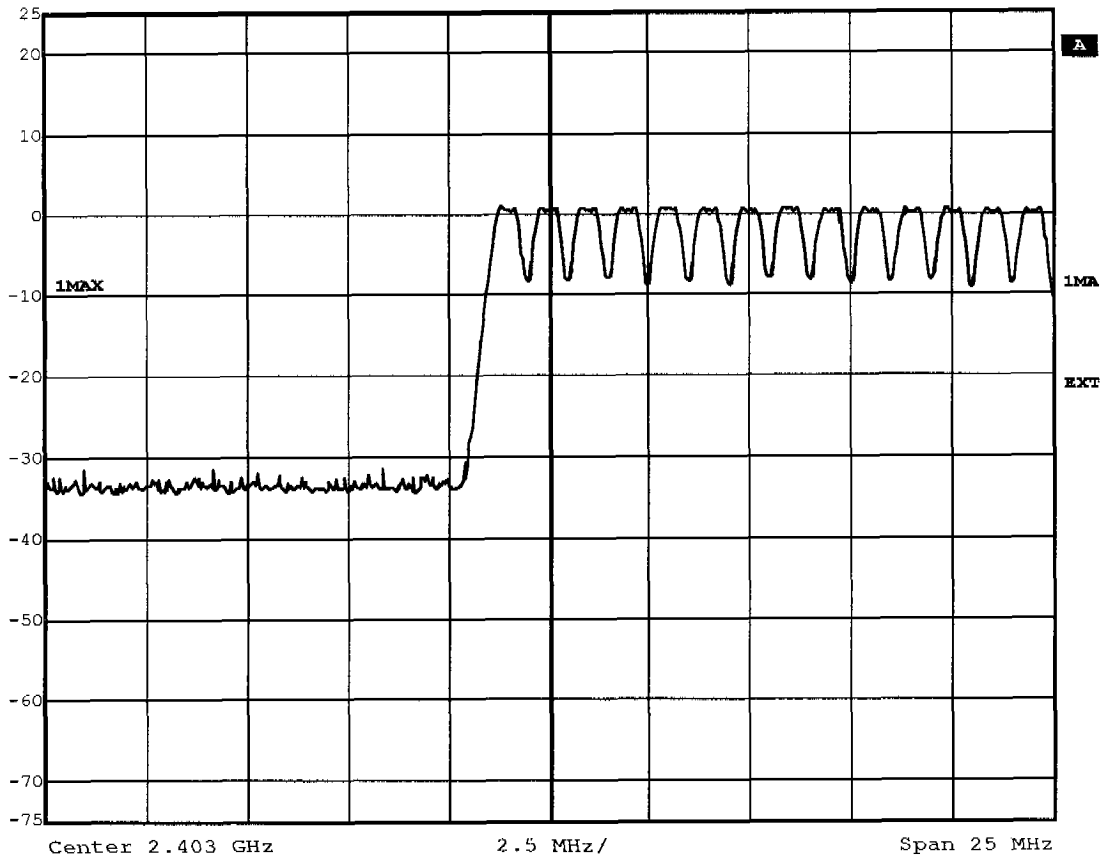

Title: Number of Hopping Frequencies Ch.: 0-13
Comment A: Jabra BT620s
Date: 12.SEP.2005 14:35:54




Ref Lvl 25 dBm RBW 300 kHz RF Att 50 dB
VBW 300 kHz
SWT 5 ms Unit dBm

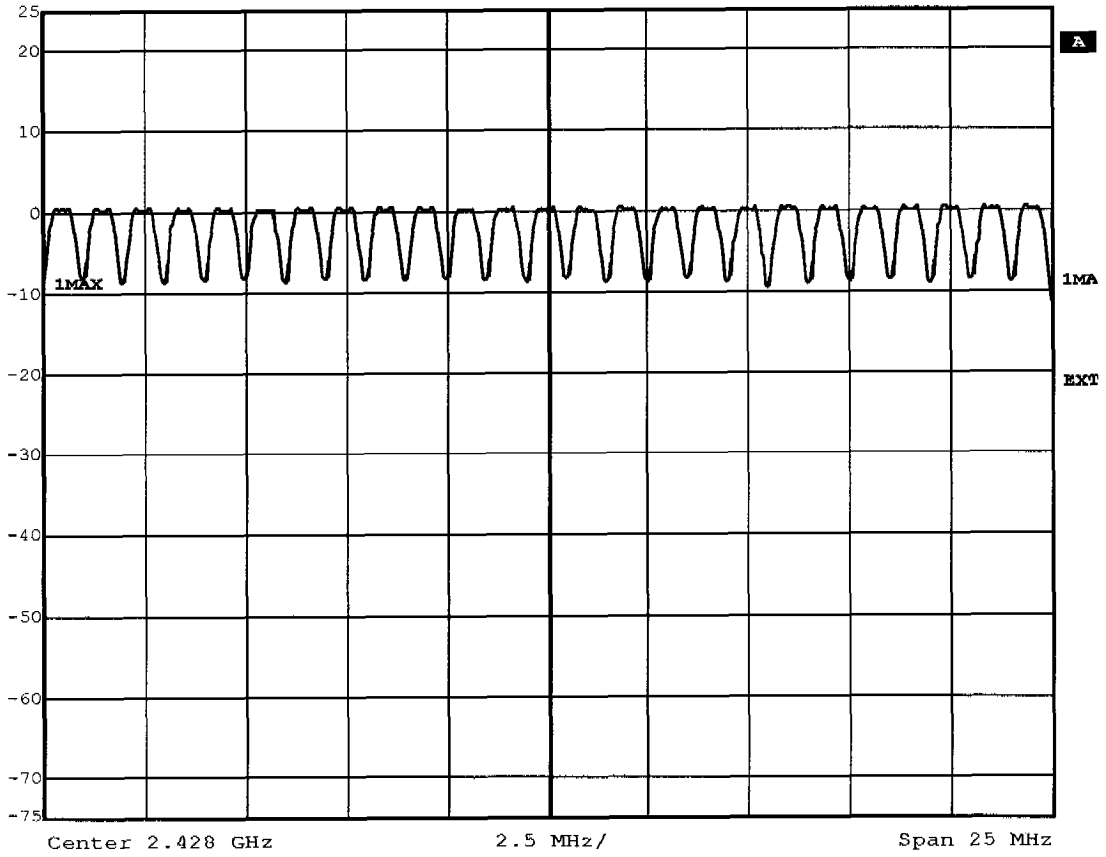

Title: Number of Hopping Frequencies Ch.: 14-38
Comment A: Jabra BT620s
Date: 12.SEP.2005 14:37:29




Ref Lvl 25 dBm RBW 300 kHz RF Att 50 dB
VBW 300 kHz
SWT 5 ms Unit dBm

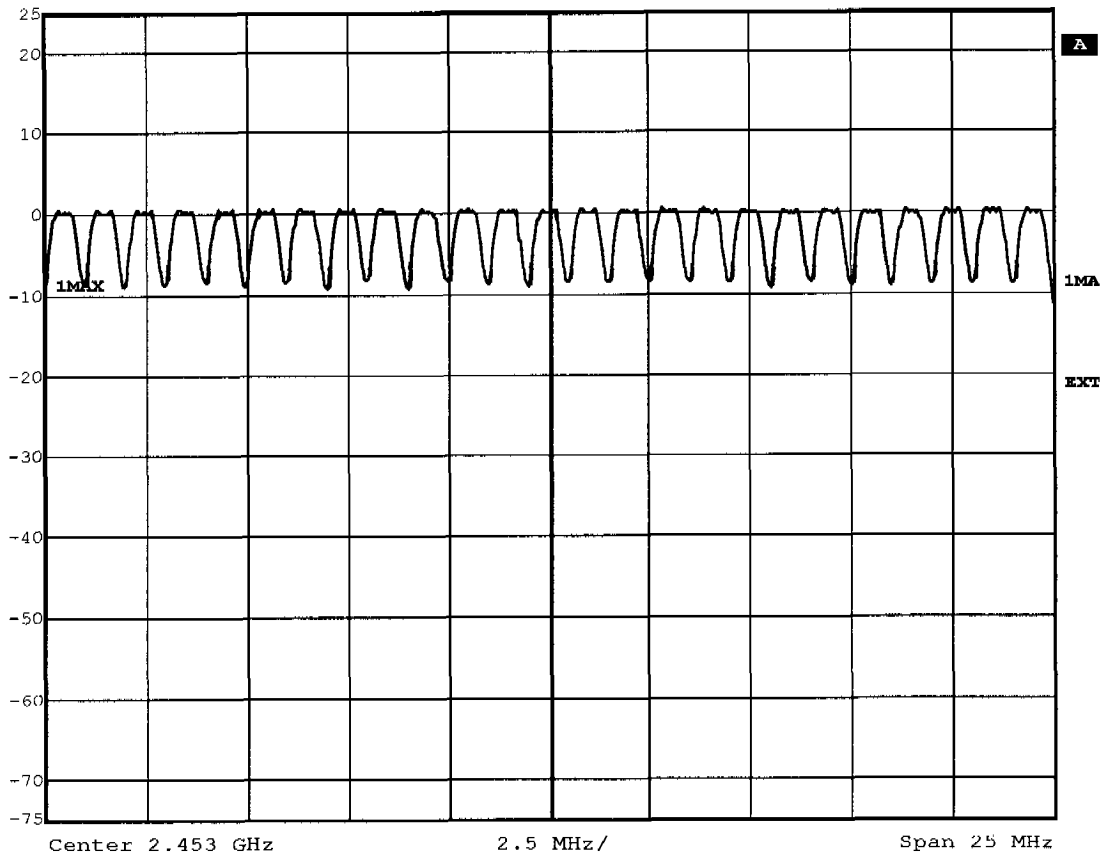

Title: Number of Hopping Frequencies Ch.: 39-63
Comment A: Jabra BT620s
Date: 12.SEP.2005 14:39:06




Ref Lvl 25 dBm
RBW 300 kHz RF Att 50 dB
VBW 300 kHz
SWT 5 ms Unit dBm

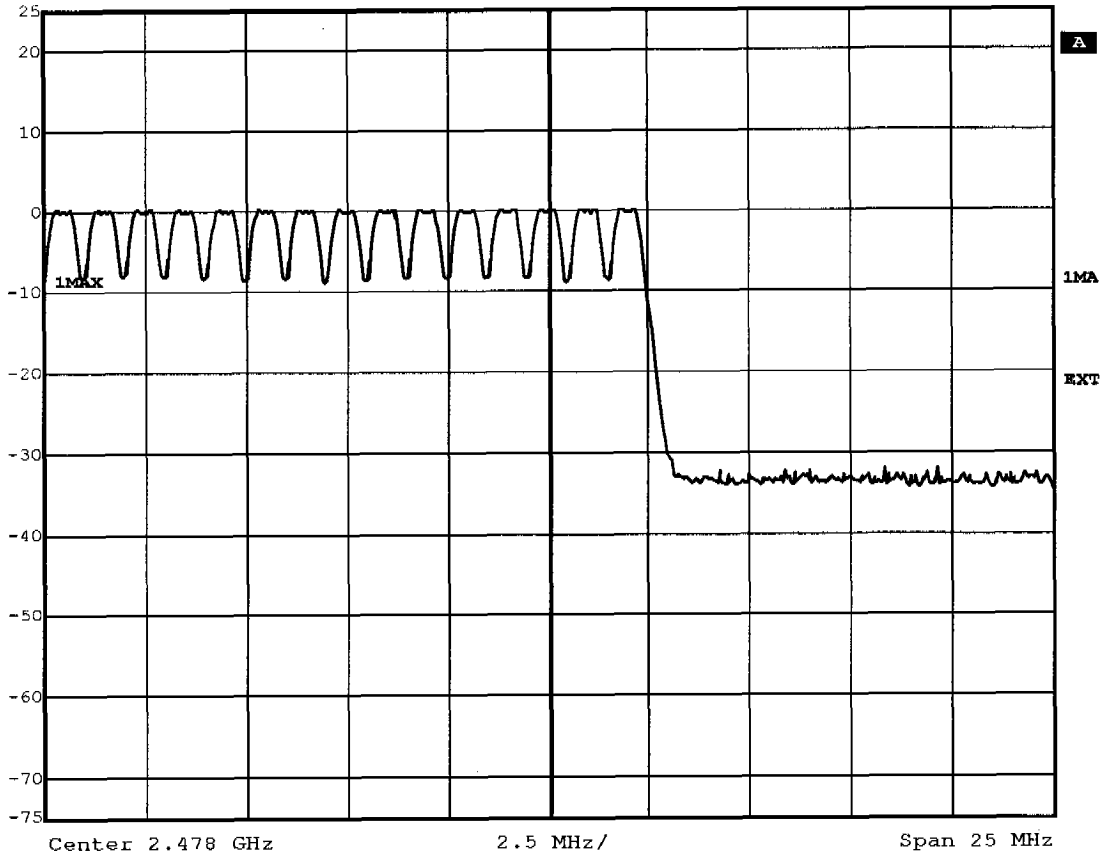

Title: Number of Hopping Frequencies Ch.: 64-78
Comment A: Jabra BT620s
Date: 12.SEP.2005 14:42:40




Ref Lvl 25 dBm
RBW 300 kHz RF Att 50 dB
VBW 300 kHz
SWT 5 ms Unit dBm

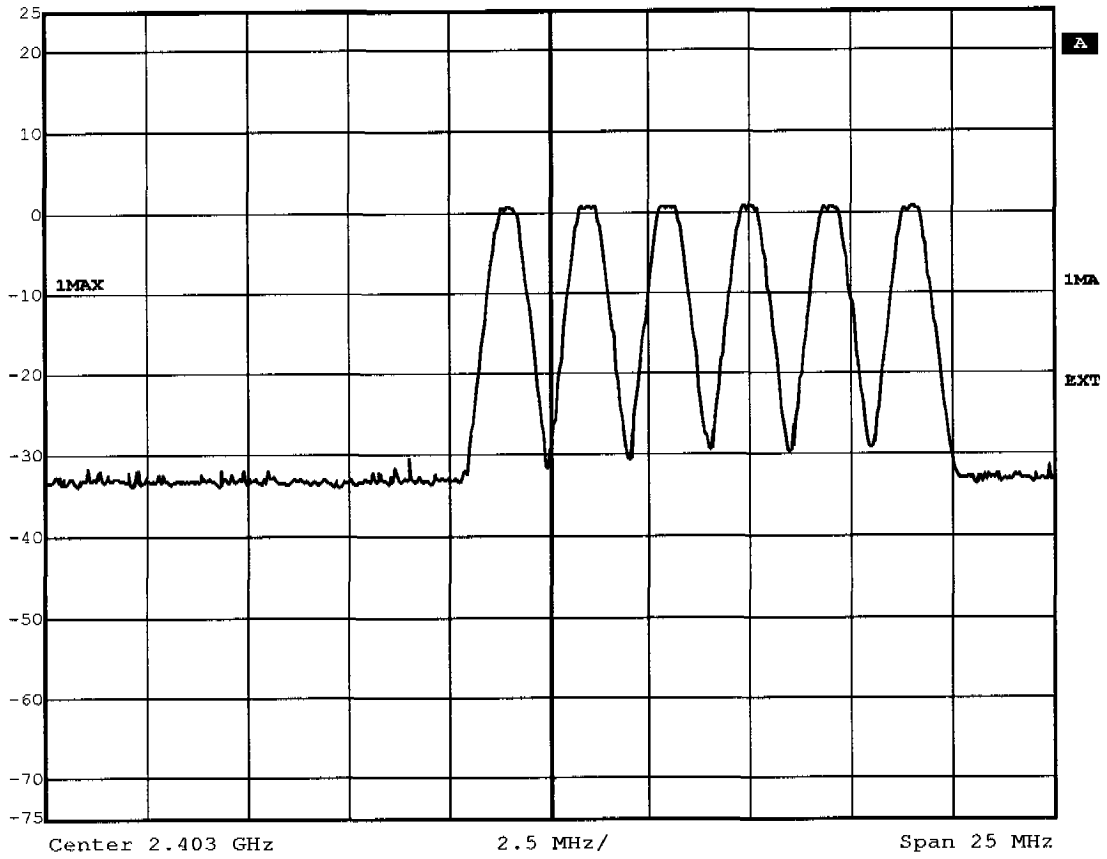

Title: Number of Hopping Frequencies (Master Inquiry Mode)
Comment A: Jabra BT620s
Date: 12.SEP.2005 15:11:59




Ref Lvl 25 dBm RBW 300 kHz RF Att 50 dB
VBW 300 kHz
SWT 5 ms Unit dBm

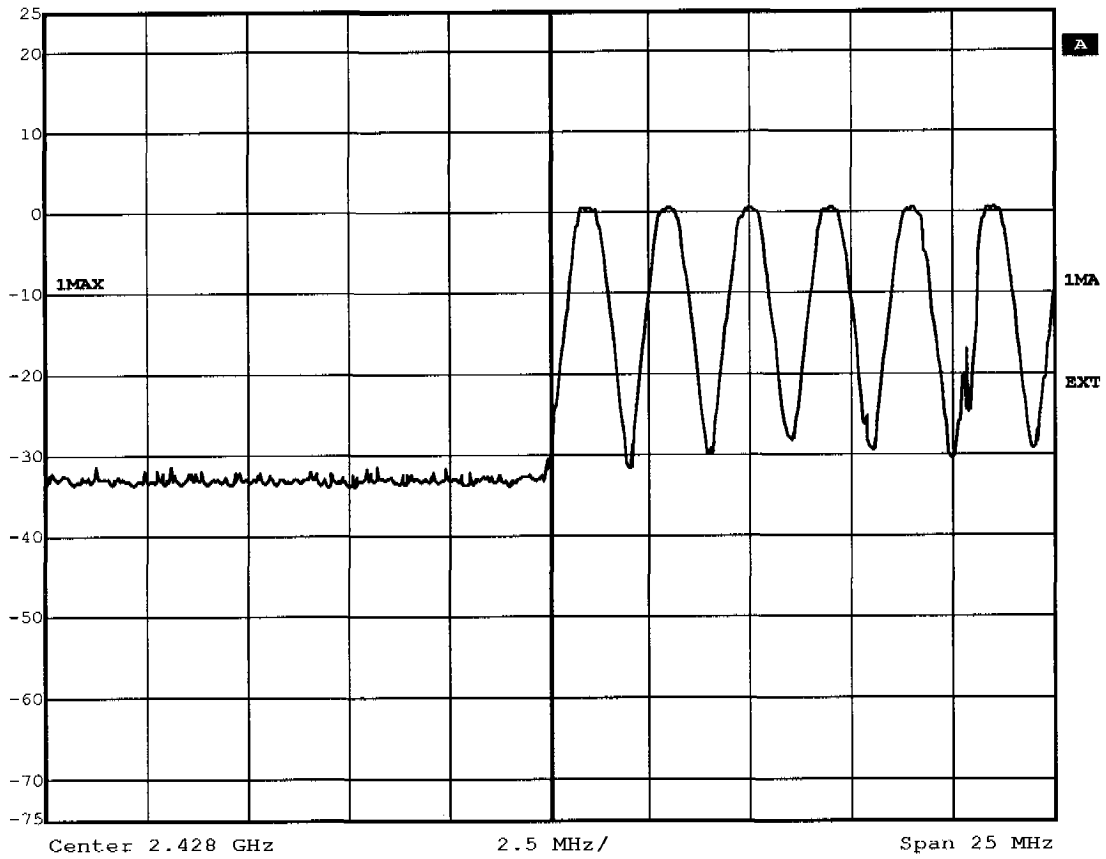

Title: Number of Hopping Frequencies (Master Inquiry Mode)
Comment A: Jabra BT620s
Date: 12.SEP.2005 15:14:39




Ref Lvl 25 dBm
RBW 300 kHz RF Att 50 dB
VBW 300 kHz
SWT 5 ms Unit dBm

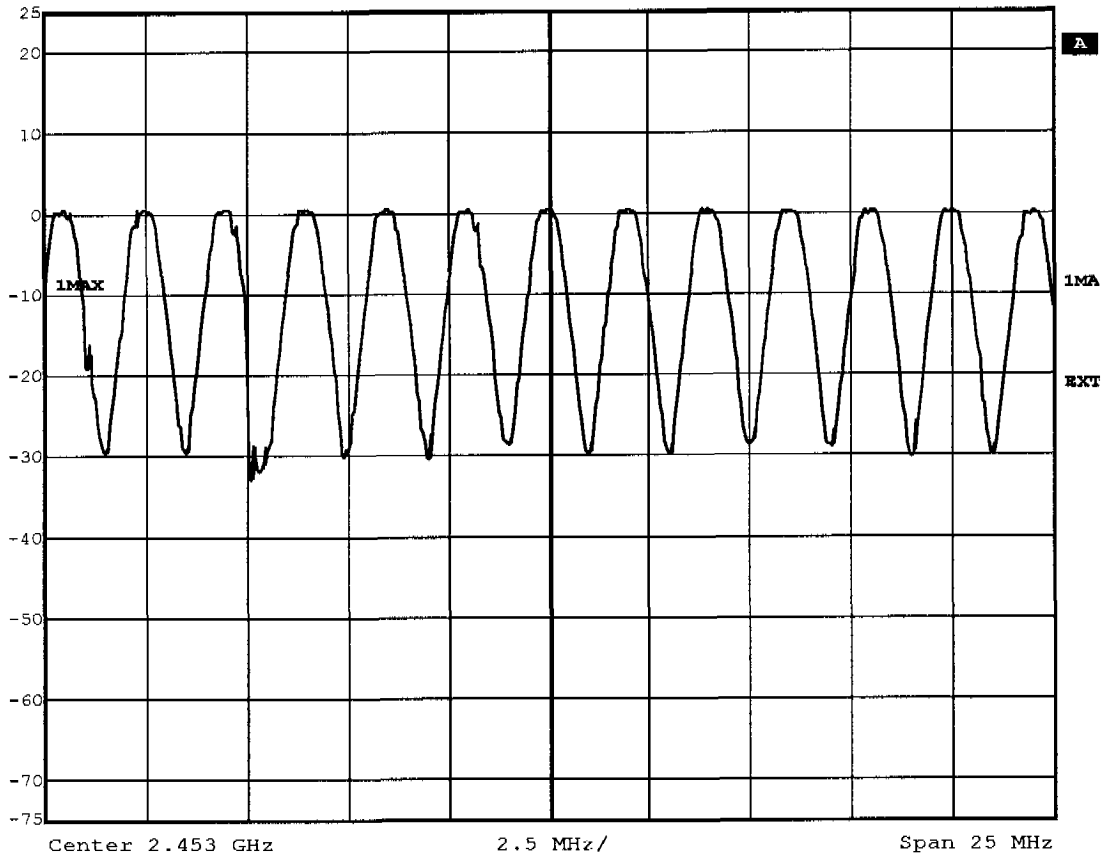

Title: Number of Hopping Frequencies (Master Inquiry Mode)
Comment A: Jabra BT620s
Date: 12.SEP.2005 15:18:00



Ref Lvl 25 dBm
RBW 300 kHz RF Att 50 dB
VBW 300 kHz
SWT 5 ms Unit dBm

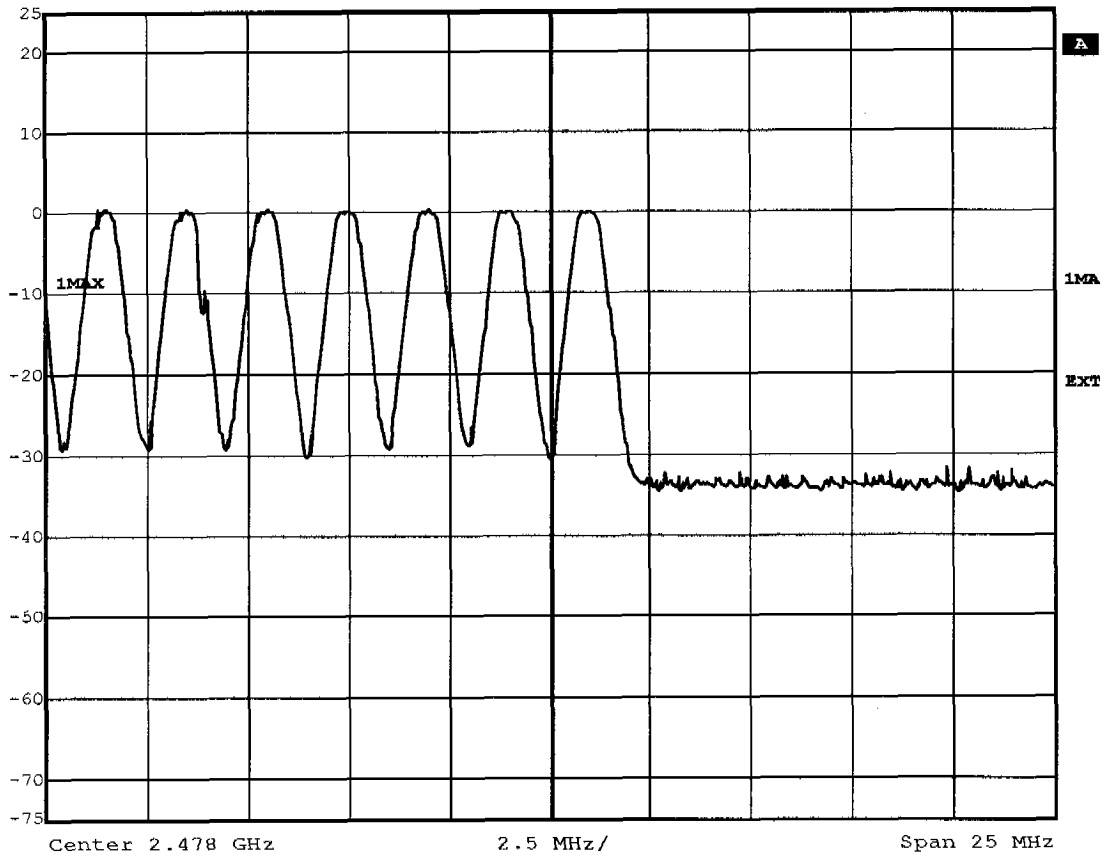

Title: Number of Hopping Frequencies (Master Inquiry Mode)
Comment A: Jabra BT620s
Date: 12.SEP.2005 15:20:07




Appendix G

Time of Occupancy (Dwell Time)




Delta 1 [T1] RBW 1 MHz RF Att 20 dB
Ref Lvl -0.31 dB VBW 1 MHz
5 dBm 2.912689 ms SWT 5 ms Unit dBm

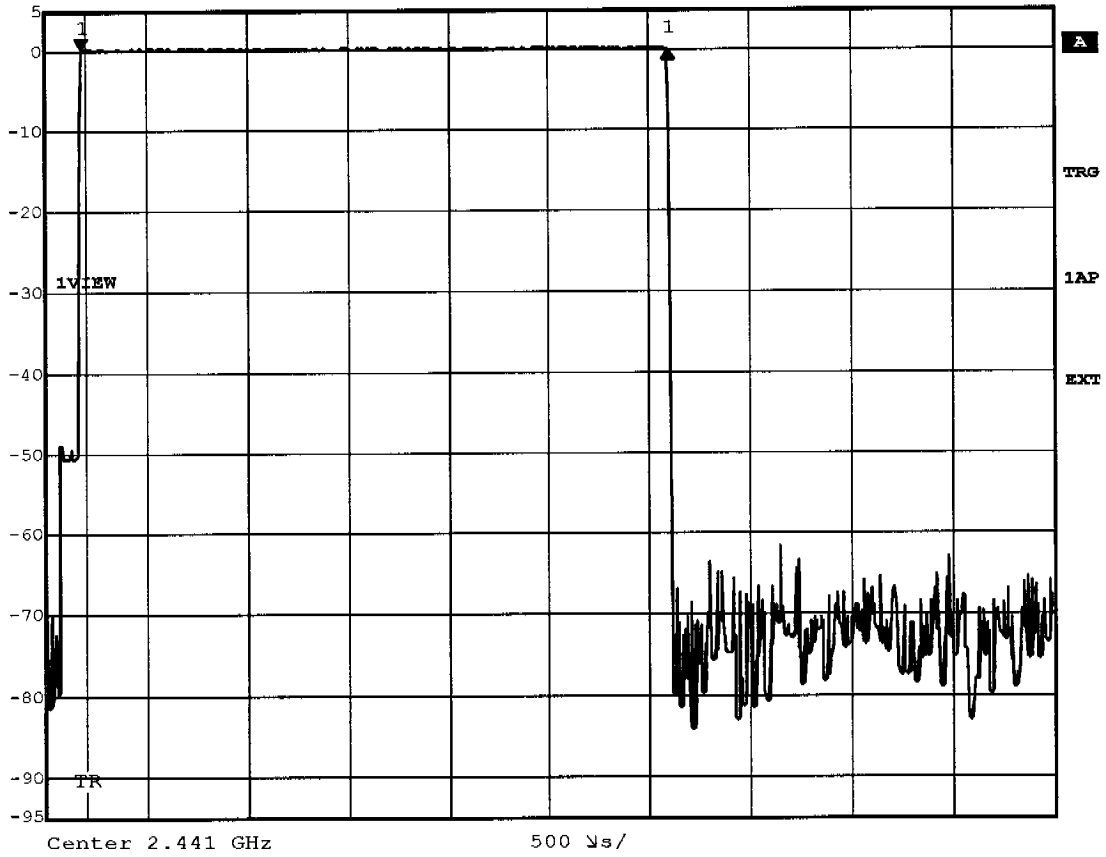

Title: Time of occupancy (Hopping DH5) 63 events * 2.913ms=183.5ms
Comment A: Jabra BT620s
Date: 12.SEP.2005 14:57:39




Delta 1 [T1] RBW 1 MHz RF Att 30 dB
 Ref Lvl 0.26 dB VBW 1 MHz
 5 dBm 119.311824 μ s SWT 300 μ s Unit dBm

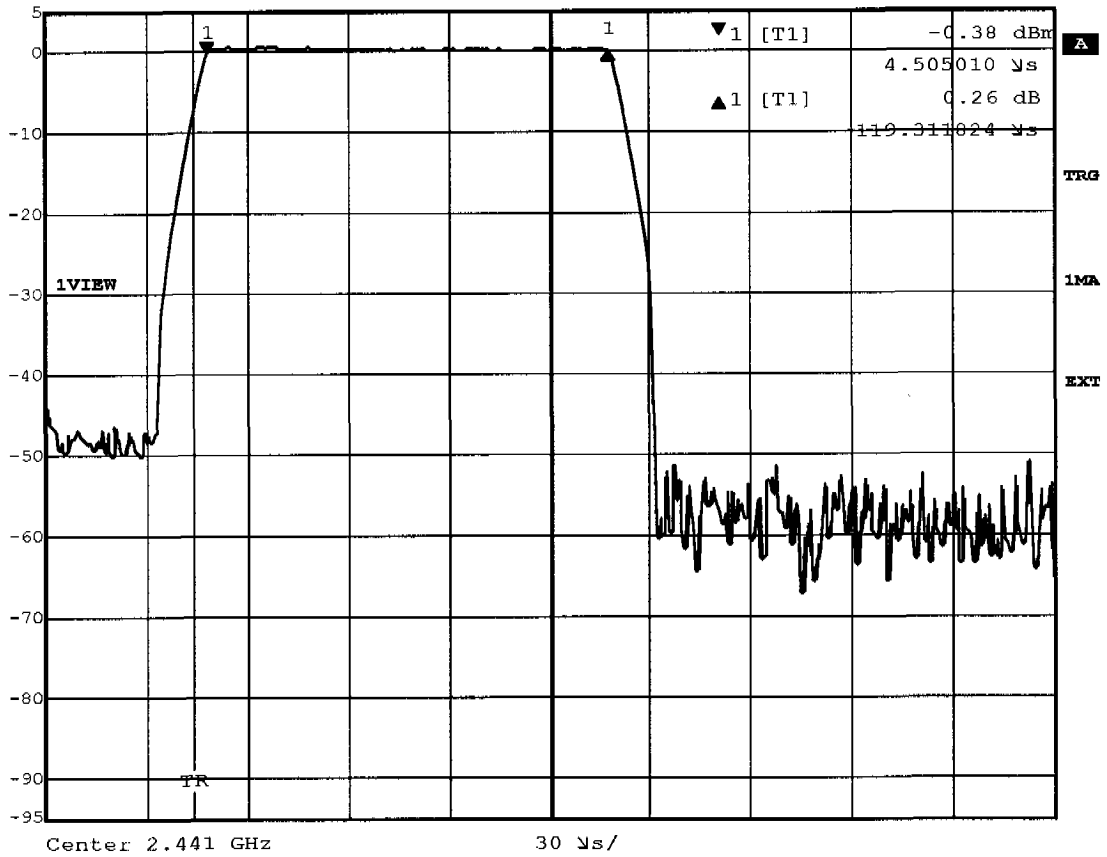

Title: Time of occupancy (Inquiry mode) 634 events * 0.119ms=75.5ms
 Comment A: Jabra BT620s
 Date: 12.SEP.2005 15:08:04



Marker 1 [T1] RBW 1 MHz RF Att 50 dB
Ref Lvl 0.03 dBm VBW 1 MHz
25 dBm -44.065832 μ s SWT 11 ms Unit dBm

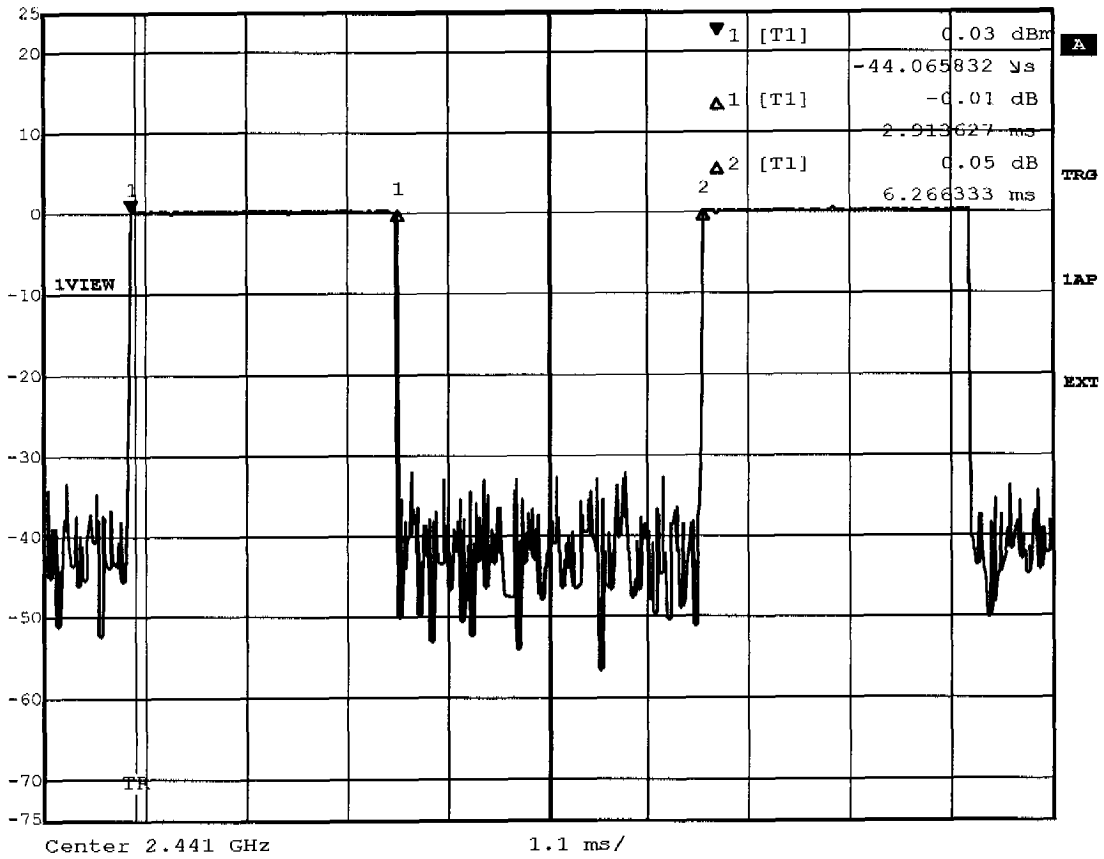

Title: Duty Cycle
Comment A: Jabra BT620s
Date: 12.SEP.2005 14:15:13




Appendix H

20dB Bandwidth




Delta 1 [T1] RBW 10 kHz RF Att 50 dB
Ref Lvl -0.57 dB VBW 10 kHz
25 dBm 917.03406814 kHz SWT 56 ms Unit dBm

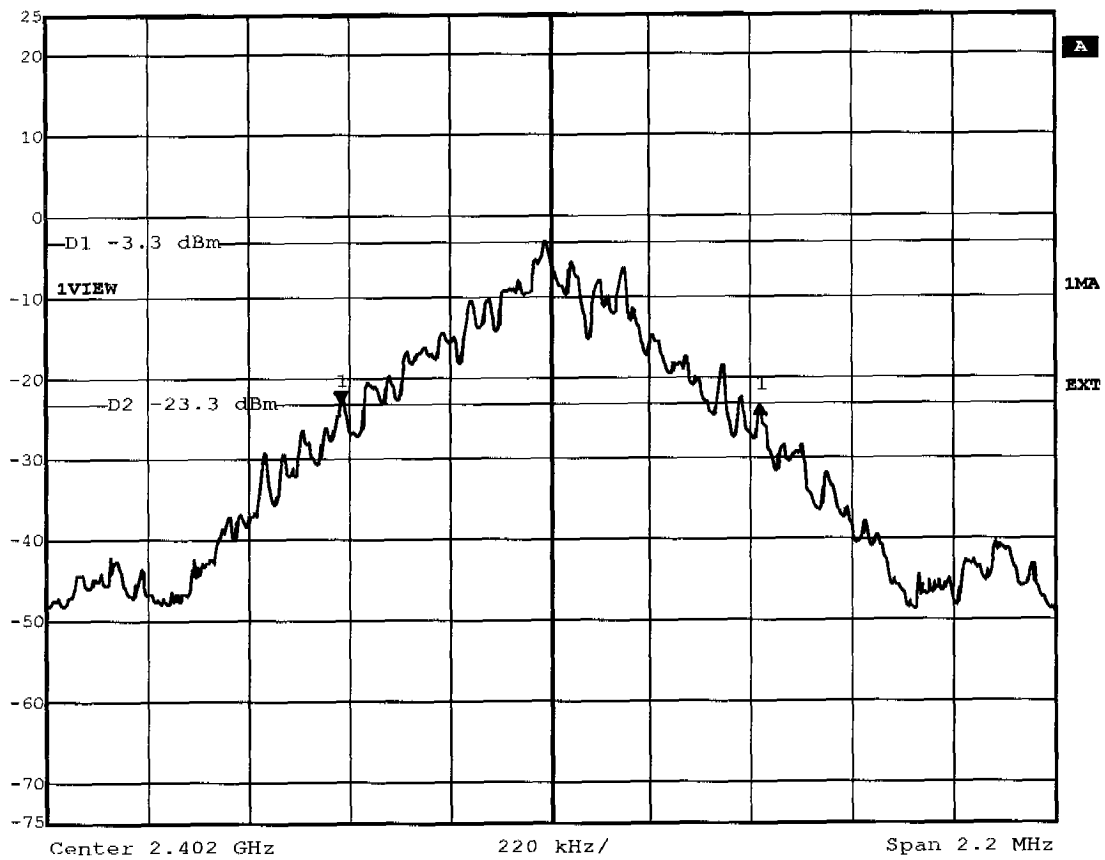

Title: -20dB Bandwidth Ch.: 0
Comment A: Jabra BT620s
Date: 12.SEP.2005 14:03:27



Delta 1 [T1] RBW 10 kHz RF Att 50 dB
Ref Lvl 0.00 dB VBW 10 kHz
25 dBm 877.35470942 kHz SWT 56 ms Unit dBm

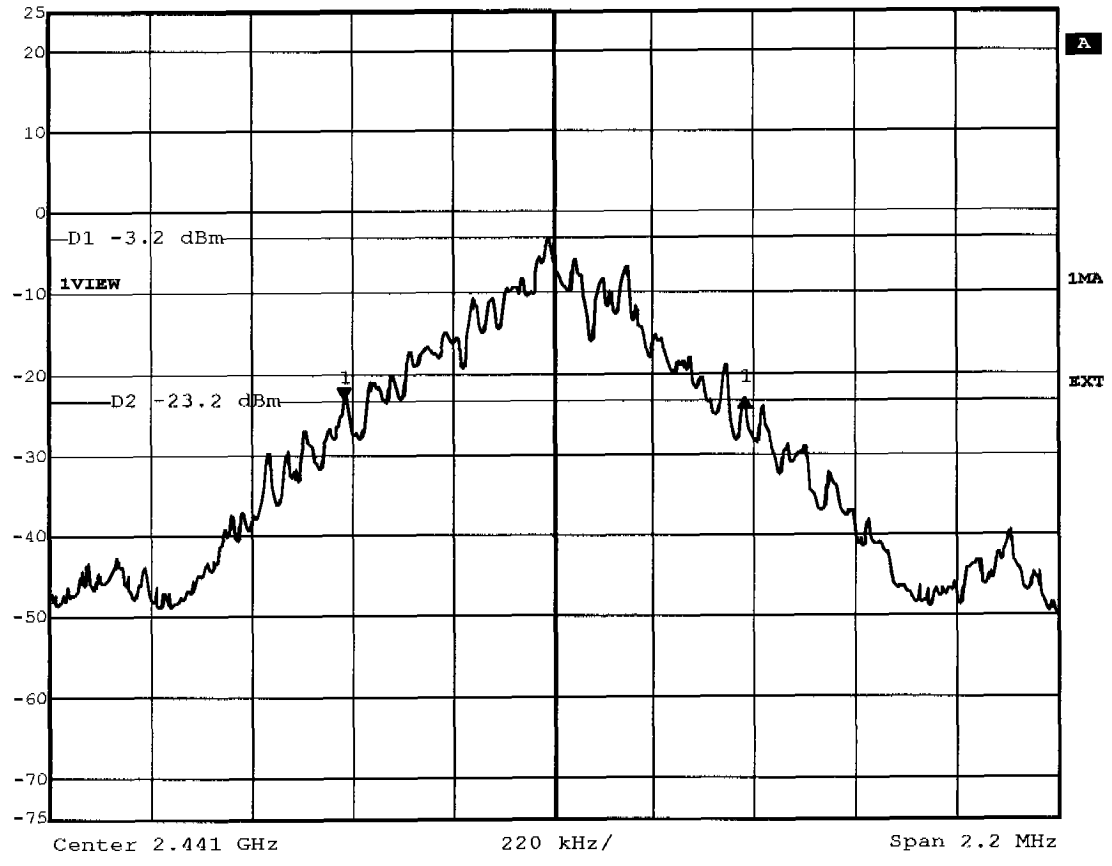

Title: -20dB Bandwidth Ch.: 39
Comment A: Jabra BT620s
Date: 12.SEP.2005 14:06:18



Delta 1 [T1]

RBW 10 kHz RF Att 50 dB

Ref Lvl

-0.14 dB

VBW 10 kHz


25 dBm

877.35470942 kHz

SWT 56 ms

Unit

dBm

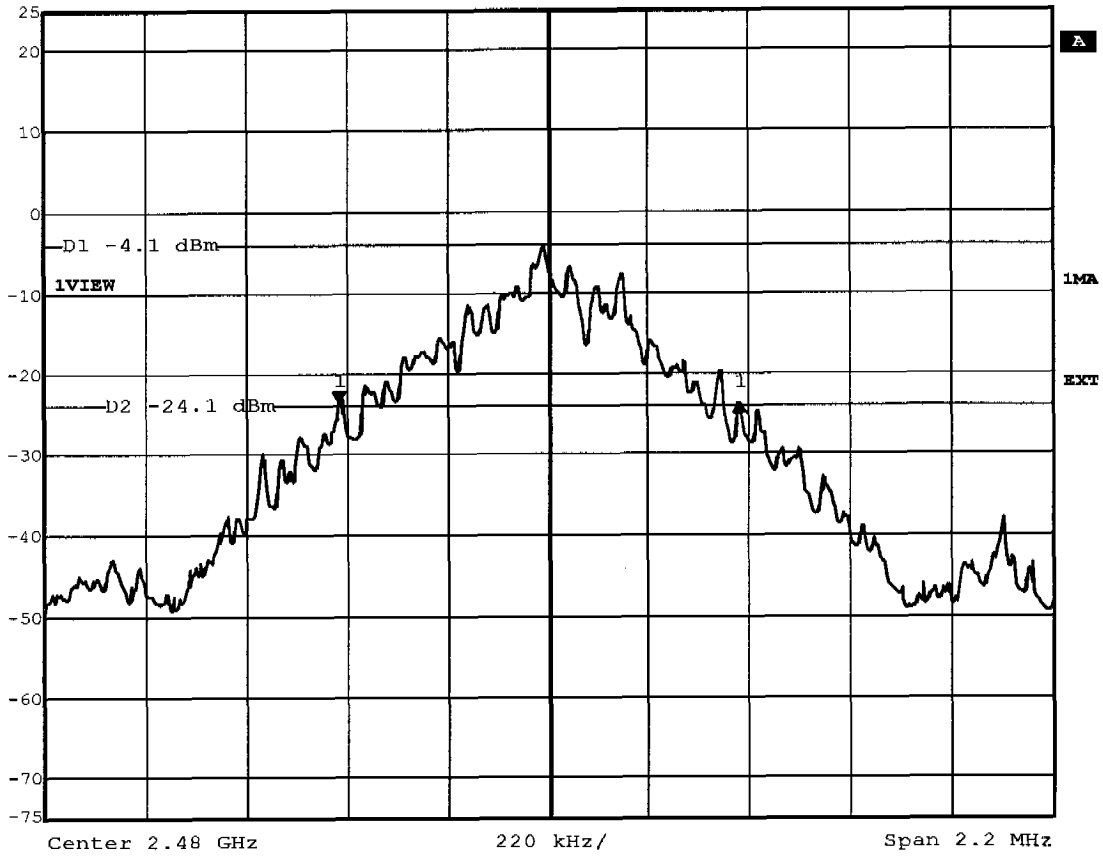

Title: -20dB Bandwidth Ch.: 78

Comment A: Jabra BT620s

Date: 12.SEP.2005 14:09:14




Appendix I

Band-edge Compliance of RF Emissions




Delta 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl 37.00 dB VBW 50 kHz
25 dBm 1.99649299 MHz SWI 5 ms Unit dBm

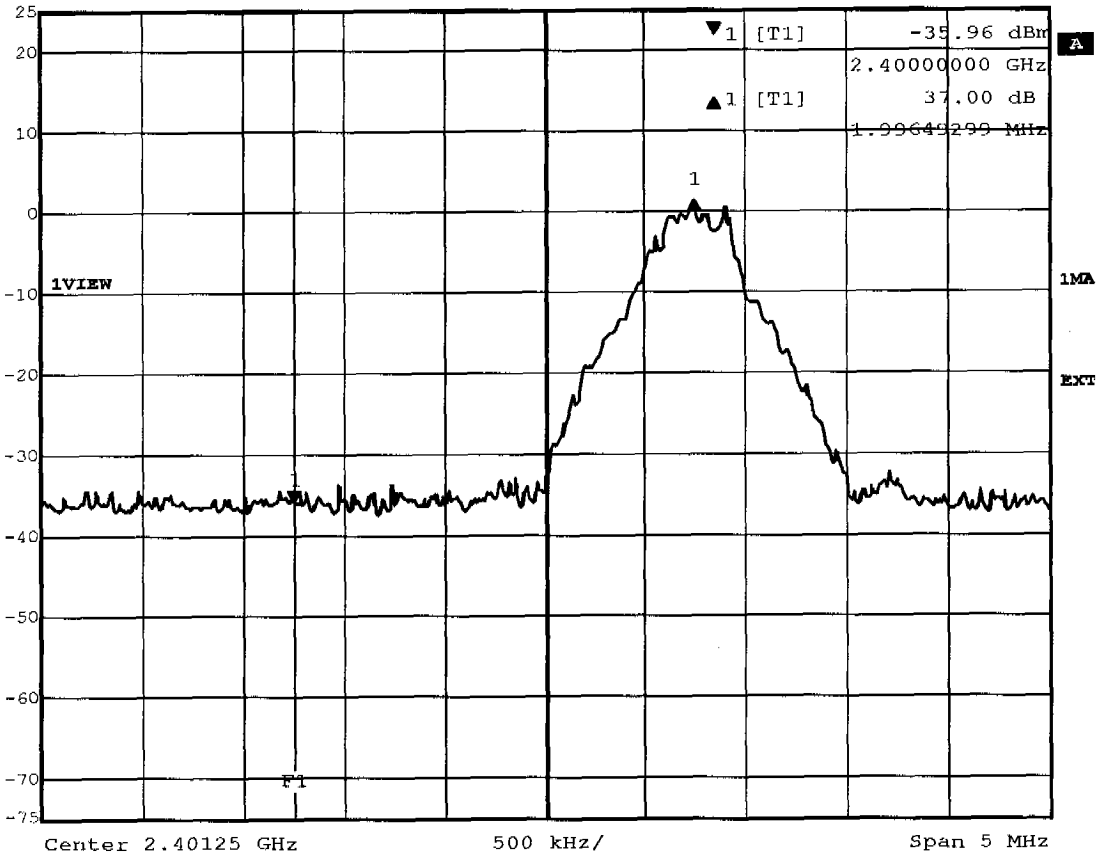

Title: Band-edge Compliance (conducted, single frequ. mode)
Comment A: Jabra BT620s
Date: 12.SEP.2005 14:25:25




Delta 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl 25 dBm 37.21 dB VBW 50 kHz
-3.49727455 MHz SWT 5 ms Unit dBm

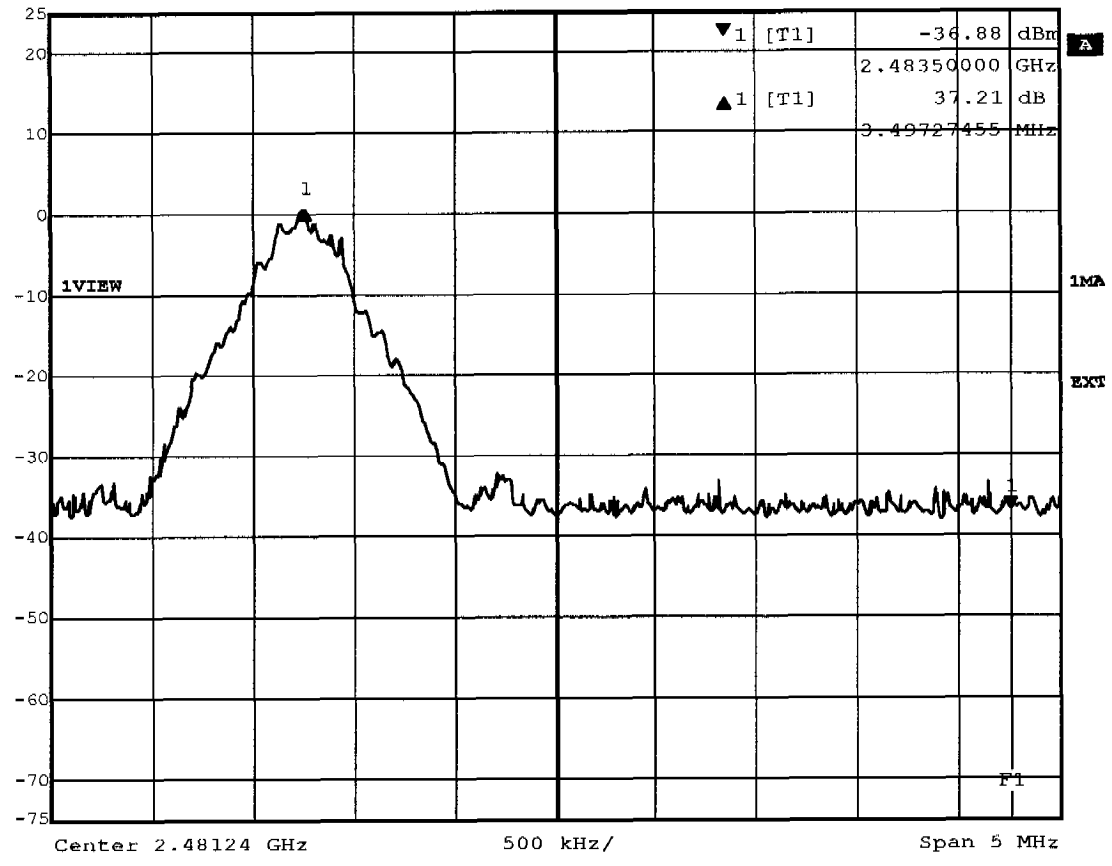

Title: Band-edge Compliance (conducted, single frequ. mode)
Comment A: Jabra BT620s
Date: 12.SEP.2005 14:29:39




Delta 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl 34.21 dB VBW 50 kHz
25 dBm 2.00300601 MHz SWT 5 ms Unit dBm

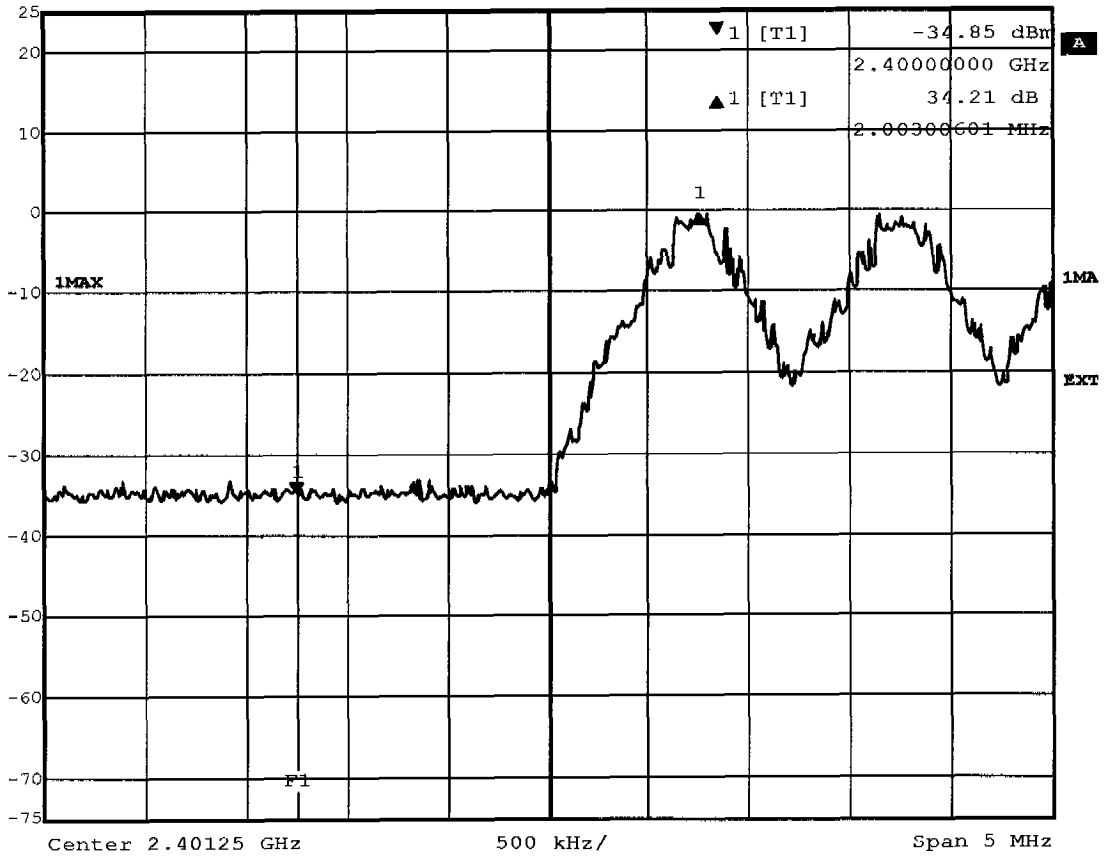

Title: Band-edge Compliance (conducted, hopping mode)
Comment A: Jabra BT620s
Date: 12.SEP.2005 14:22:29



Delta 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl 32.49 dB VBW 50 kHz
25 dBm -3.49727455 MHz SWT 5 ms Unit dBm

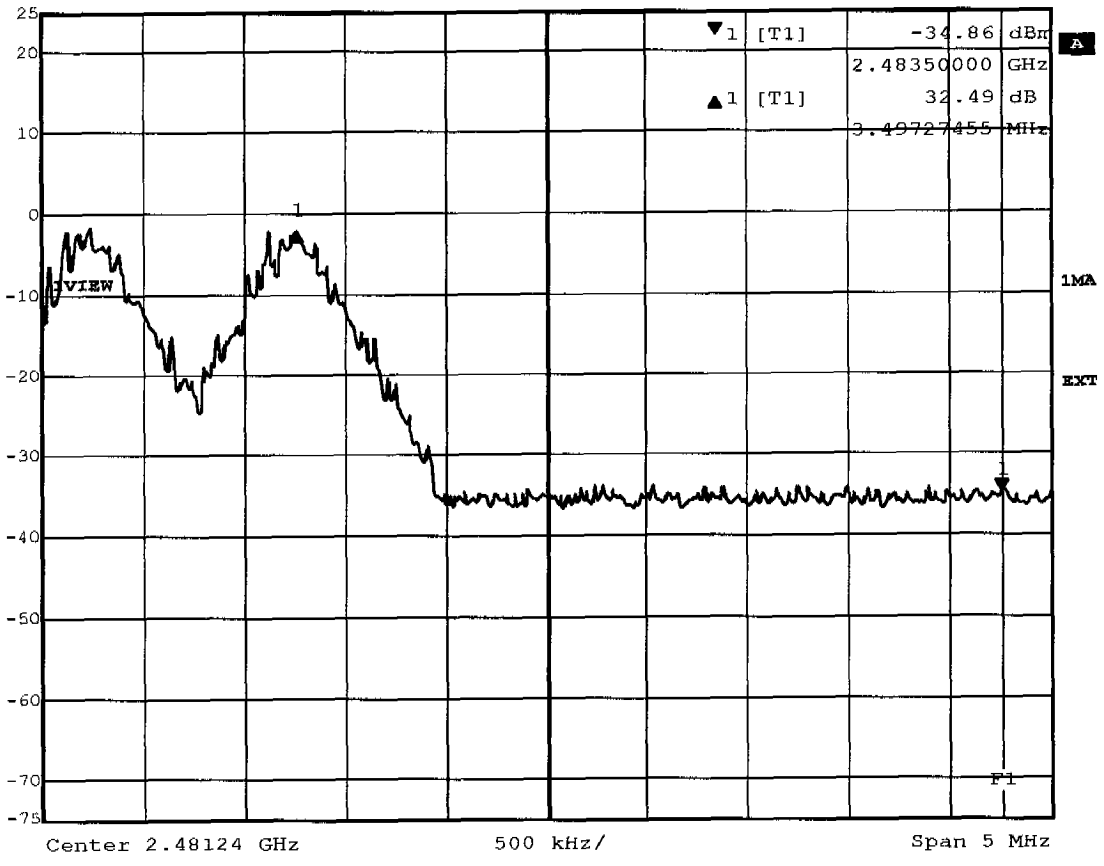

Title: Band-edge Compliance (conducted, hopping mode)
Comment A: Jabra BT620s
Date: 12.SEP.2005 14:28:03




Appendix J

Conducted Measurement at (AC) Power Line

EMI voltage test in the ac-mains according to FCC part 15

EUT: Bluetooth headset
 Manufacturer: GN Netcom
 Operating Condition: Unom: 120VAC (AC/DC adaptor), Tnom: 23°C
 Test Site: ETS
 Operator: Mr. Marquardt
 Test Specification: V-Network: ESH2-Z5 (N)
 Comment: model: Jabra BT620s mode: charging

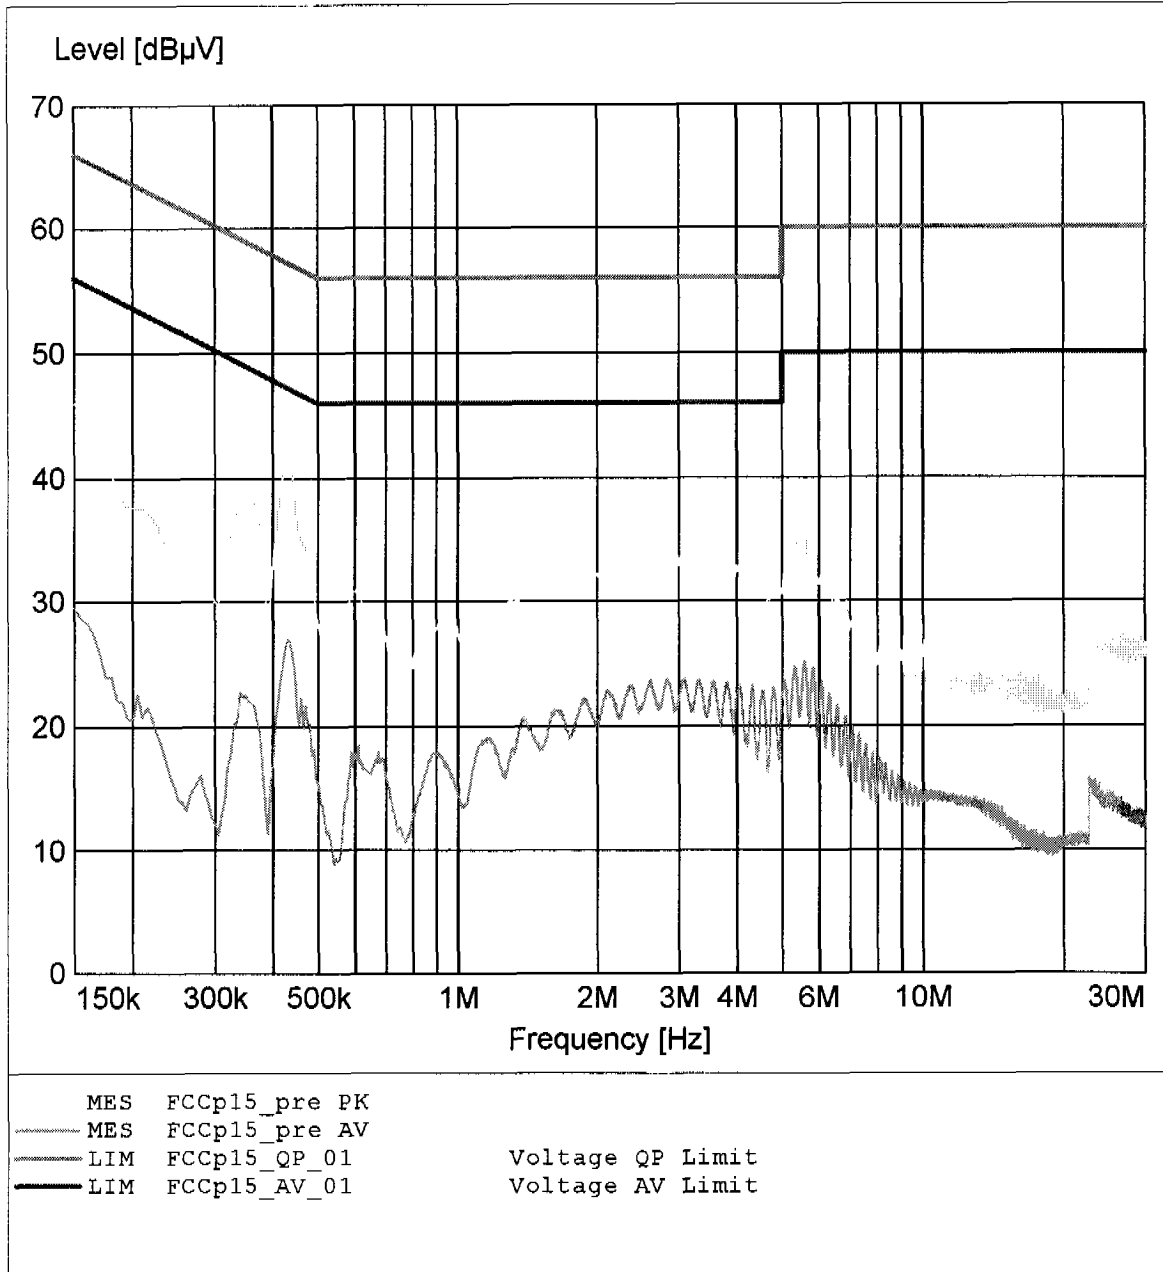

EMI voltage test in the ac-mains according to FCC part 15

EUT: Bluetooth headset
Manufacturer: GN Netcom
Operating Condition: Unom: 120VAC (AC/DC adaptor), Tnom: 23°C
Test Site: ETS
Operator: Mr. Marquardt
Test Specification: V-Network: ESH2-Z5 (L1)
Comment: model: Jabra BT620s mode: charging

