



Appendix B

Peak Output Power




Ref Lvl	0.97 dBm	RBW	1 MHz	RF Att	50 dB
25 dBm	2.40183868 GHz	VBW	1 MHz	Unit	dBm
		SWT	5 ms		



Title: Peak Output Power conducted Ch.: 0
Comment A: GN6110CU
Date: 30.OCT.2003 08:31:46



Ref Lvl	25 dBm	Marker 1 [T1]	1.29 dBm	RBW	1 MHz	RF Att	50 dB
			2.44113327 GHz	VBW	1 MHz	Unit	dBm
				SWT	5 ms		

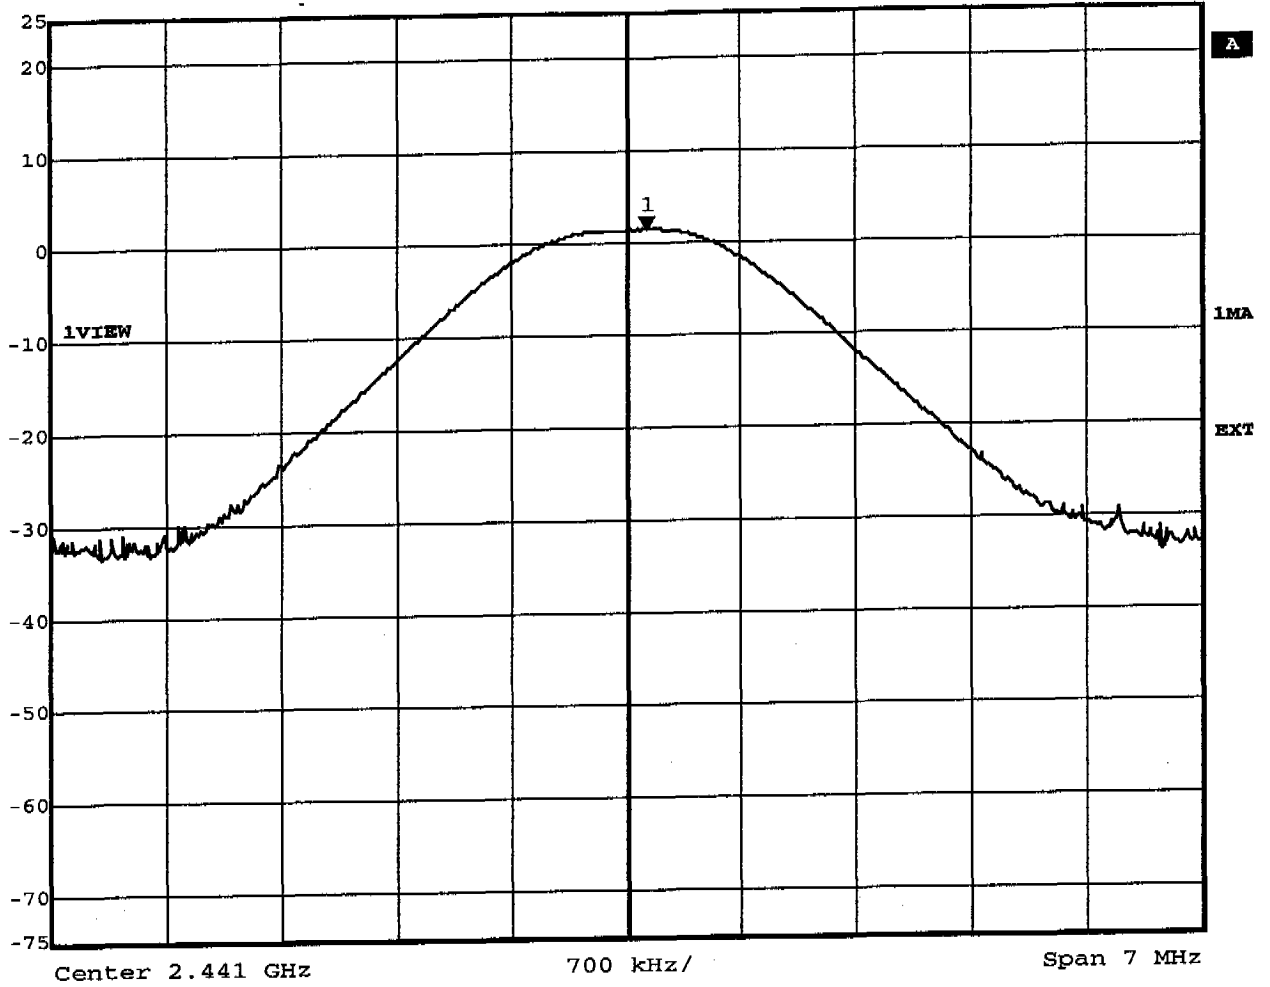

Title: Peak Output Power conducted Ch.: 39
Comment A: GN6110CU
Date: 30.OCT.2003 08:32:53




Ref Lvl	25 dBm	Marker 1 [T1]	1.85 dBm	RBW	1 MHz	RF Att	50 dB
			2.48007715 GHz	VBW	1 MHz	Unit	dBm
				SWT	5 ms		



Title: Peak Output Power conducted Ch.: 78
Comment A: GN6110CU
Date: 30.OCT.2003 08:33:49


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Bluetooth audio gateway
Model: GN6110CU / 2402 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: -4.33dBm, RBW: 5MHz

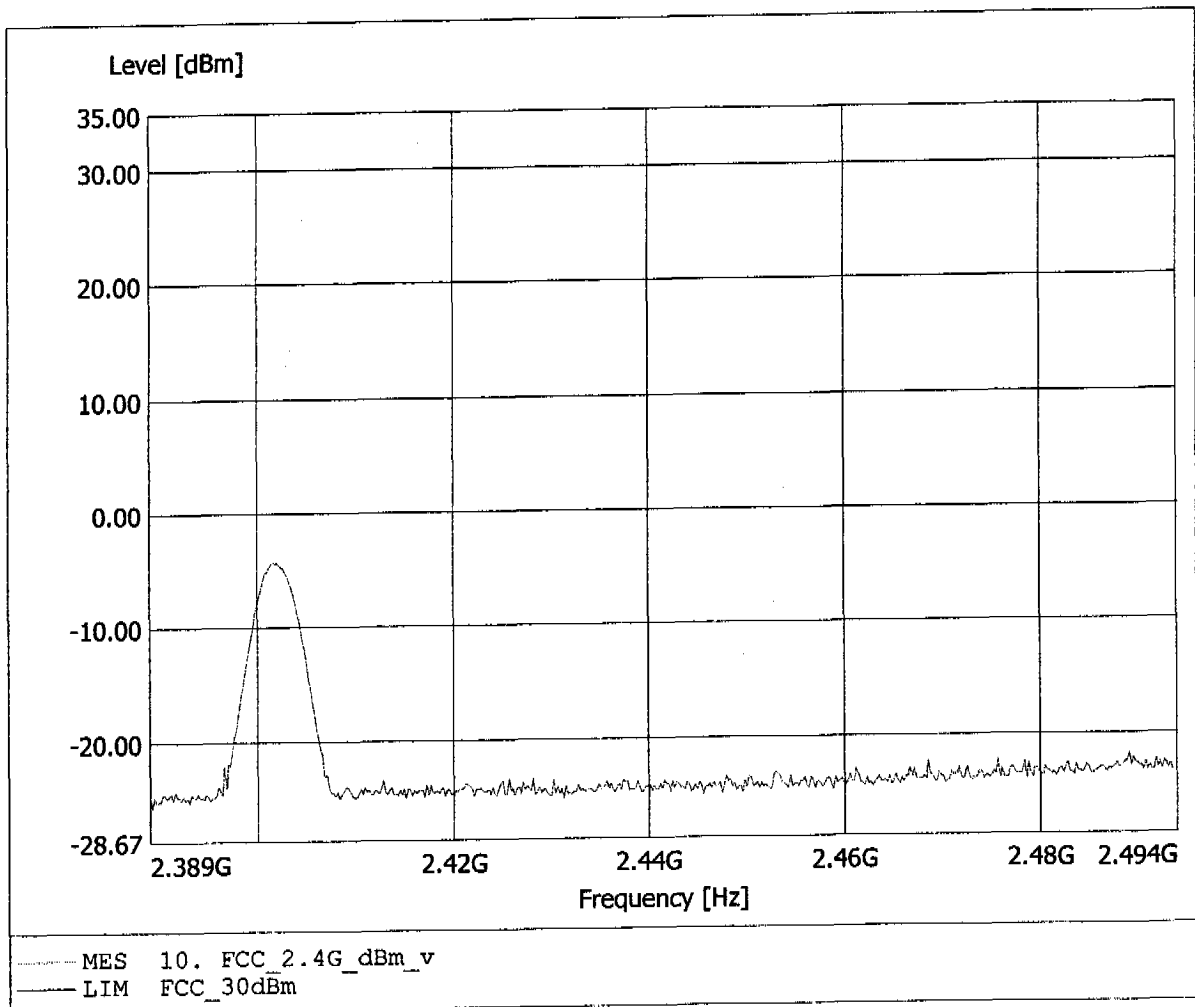


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Bluetooth audio gateway
Model: GN6110CU / 2402 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: 2.10dBm, RBW: 5MHz

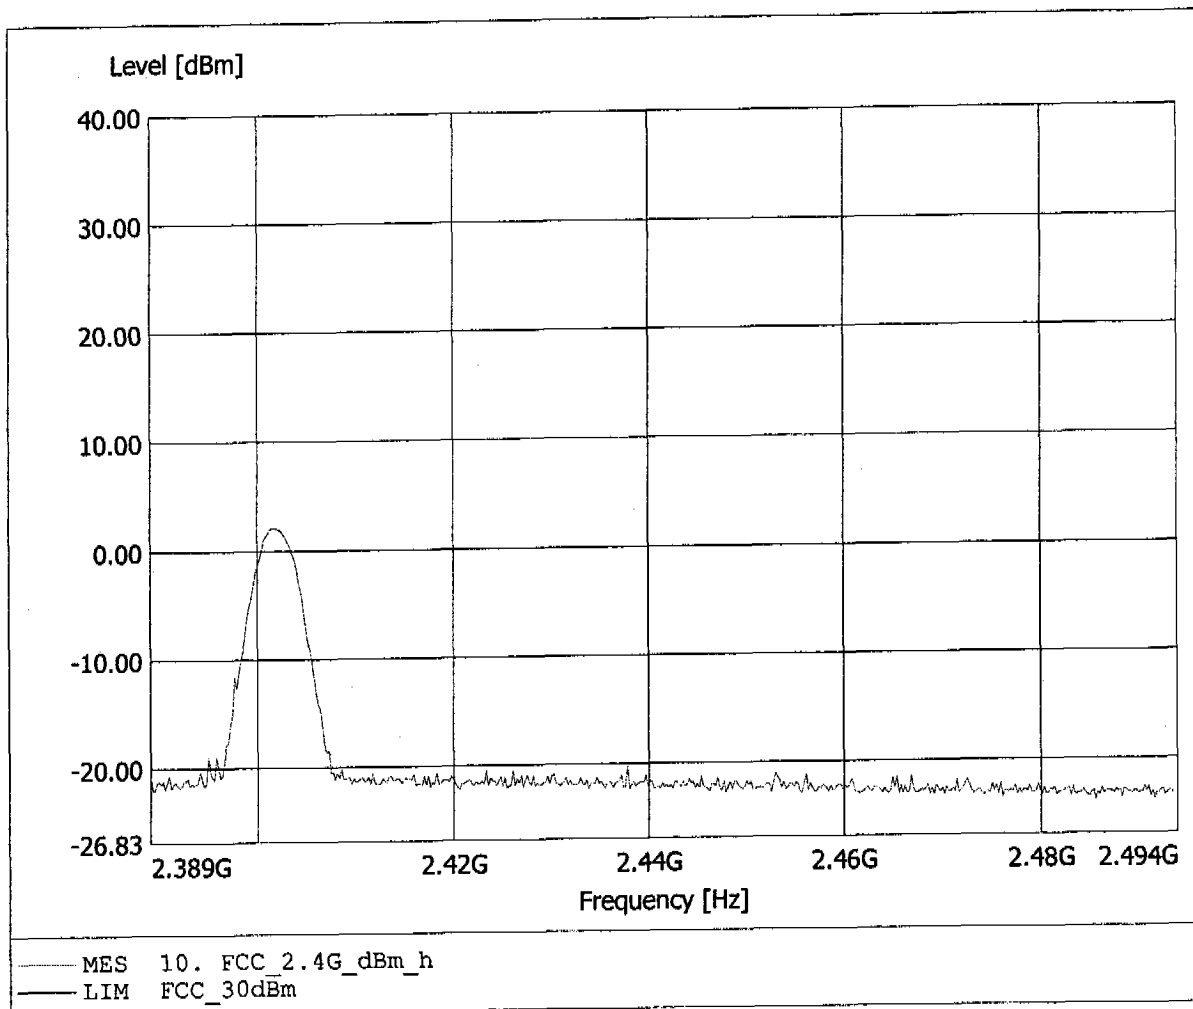


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Bluetooth audio gateway
Model: GN6110CU / 2441 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -6.01dBm, RBW: 5MHz

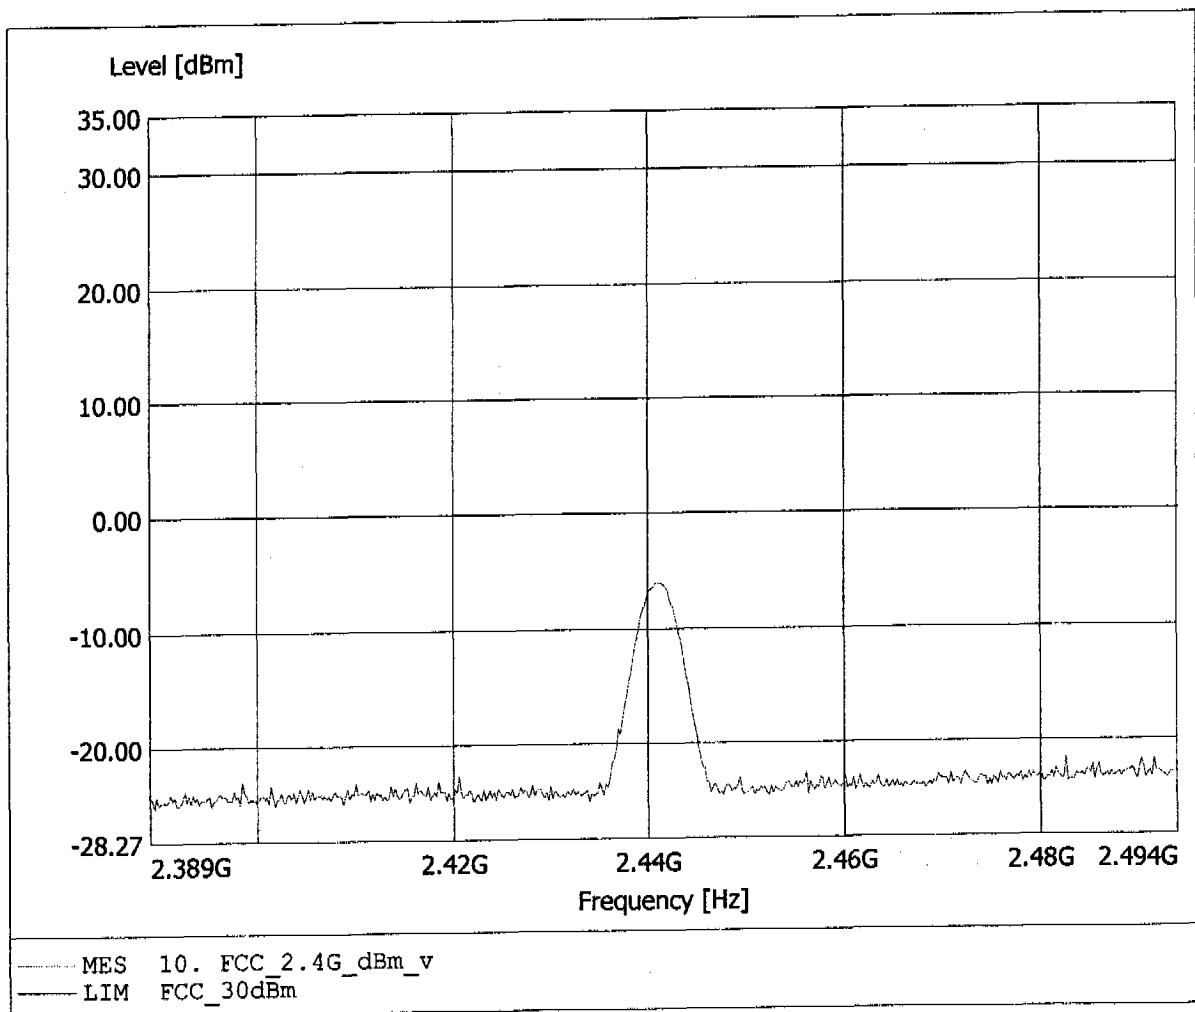


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Bluetooth audio gateway
Model: GN6110CU / 2441 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Fmax: -0.59dBm, RBW: 5MHz

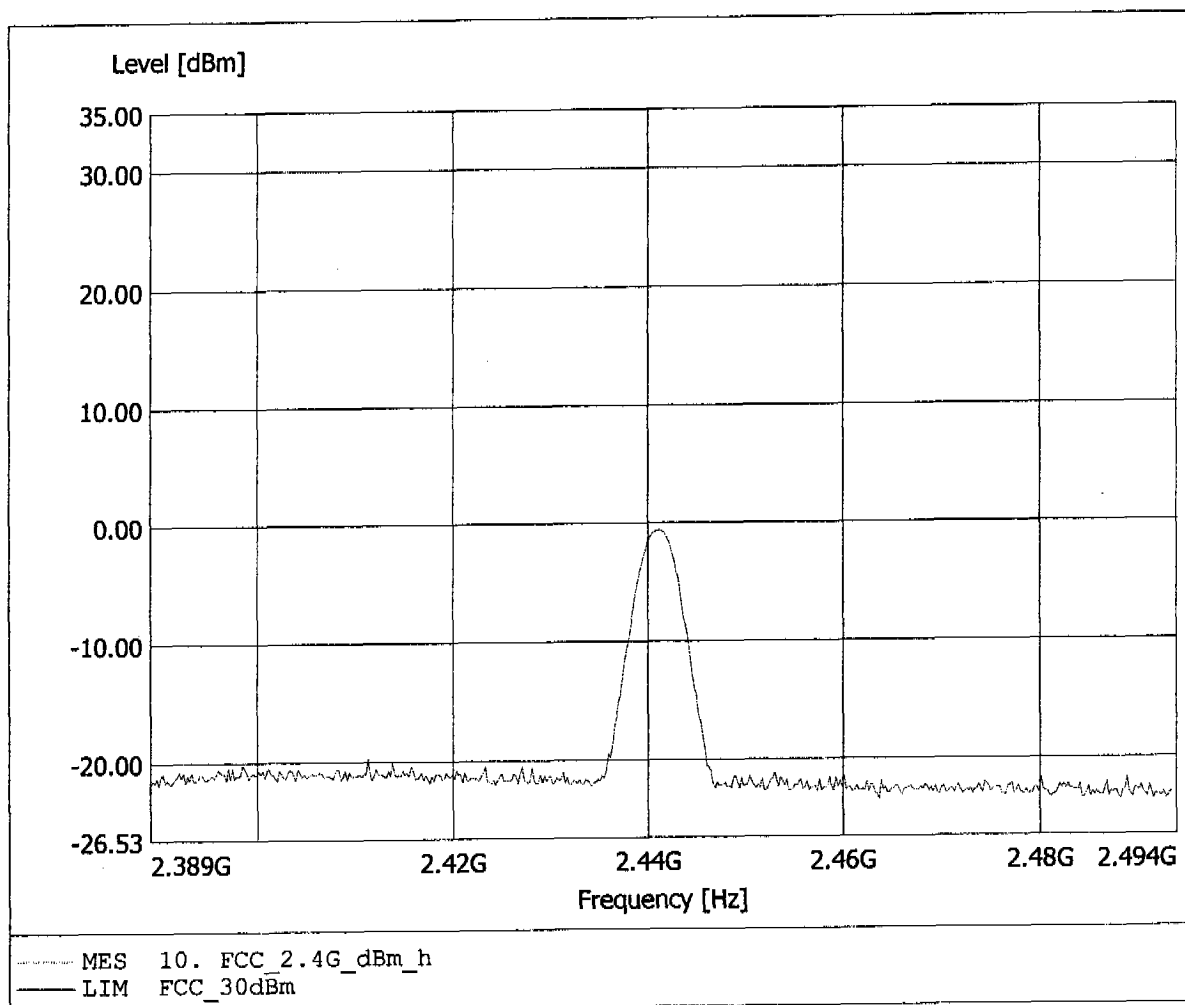


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Bluetooth audio gateway
Model: GN6110CU / 2480 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: -2.76dBm, RBW: 5MHz

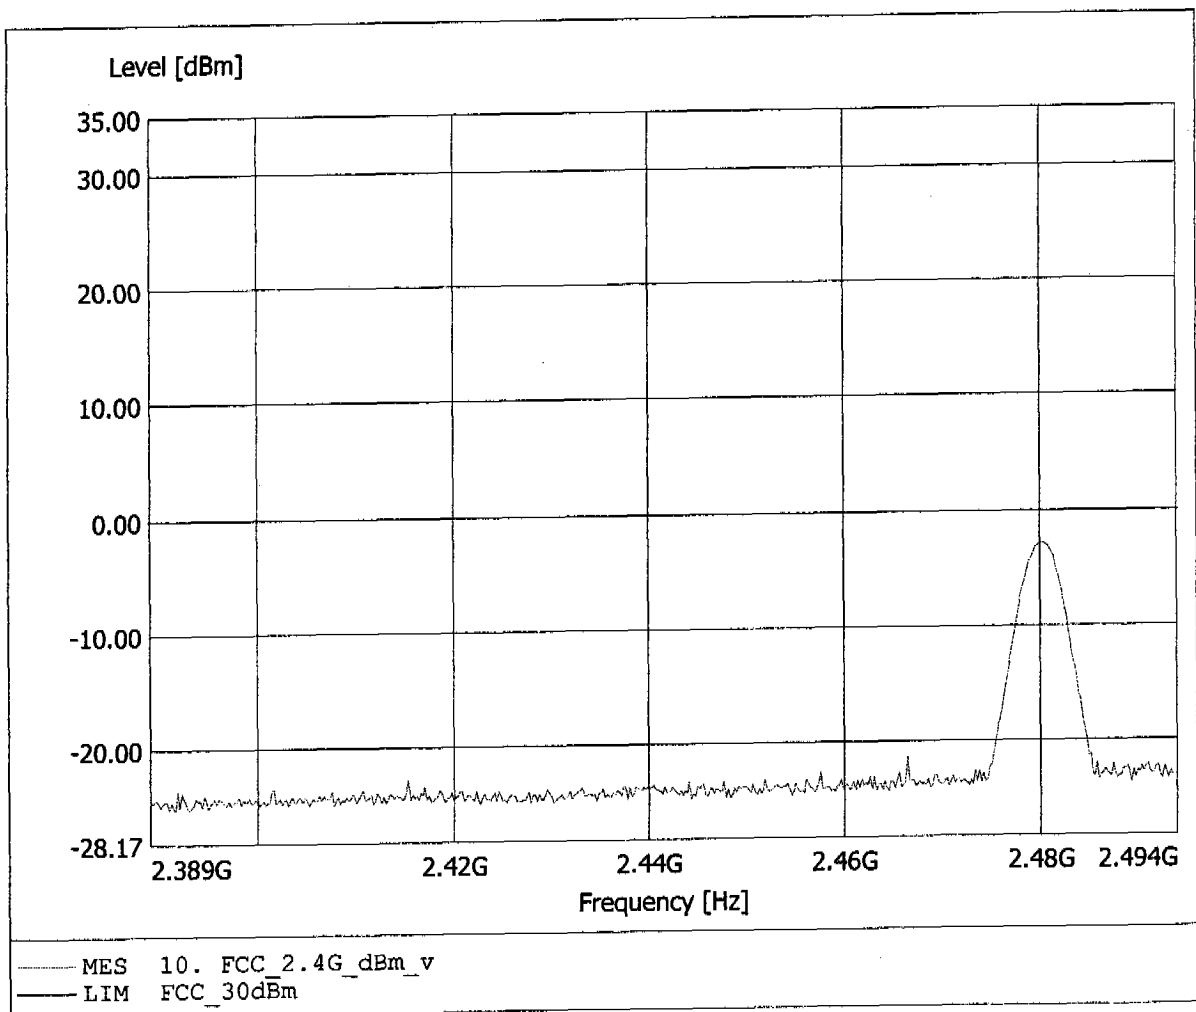


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Bluetooth audio gateway
Model: GN6110CU / 2480 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: 0.38dBm, RBW: 5MHz

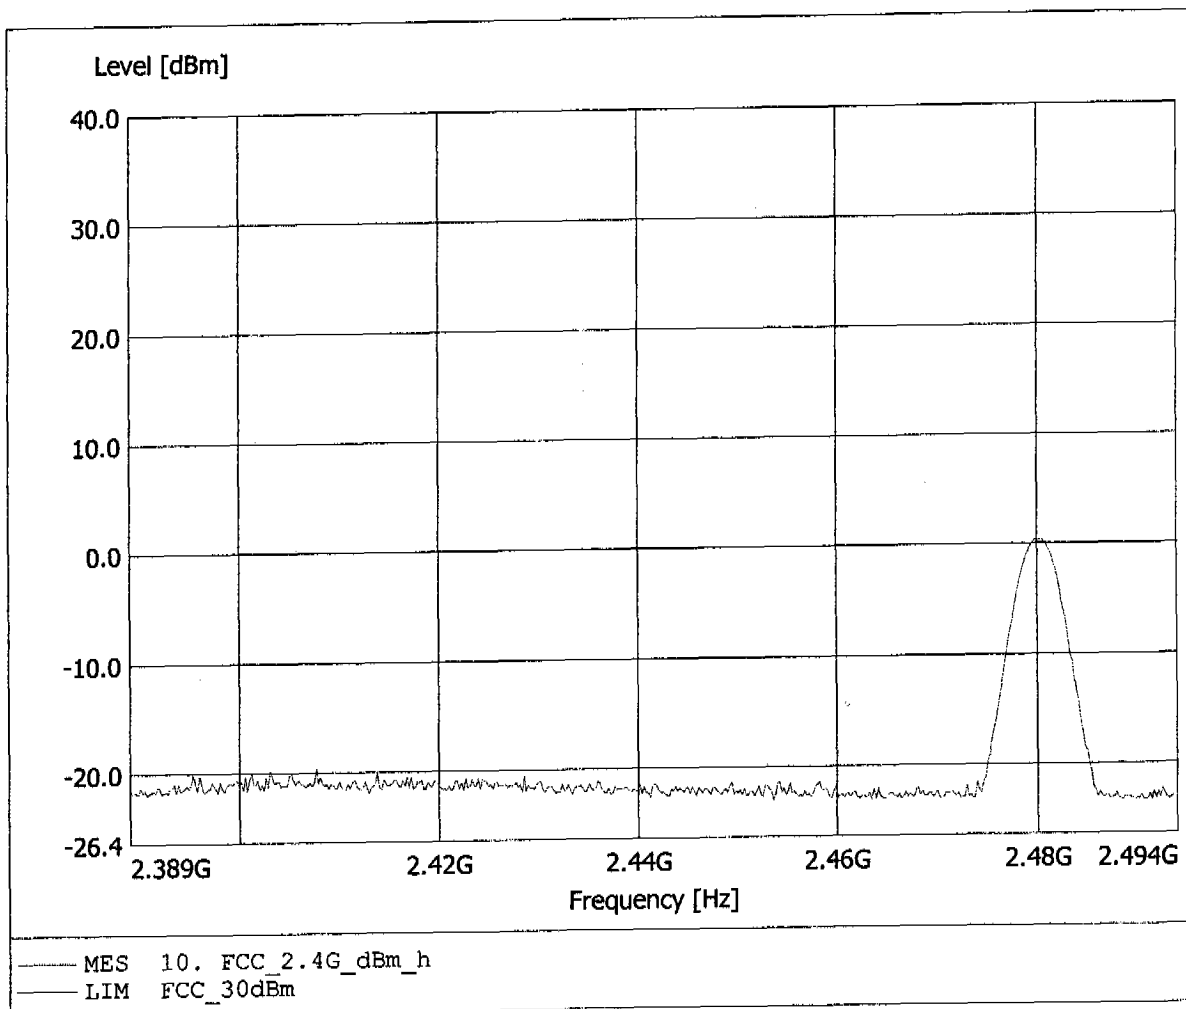


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Bluetooth audio gateway
Model: GN6110CU / 2402 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V +15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: -4.40dBm, RBW: 5MHz

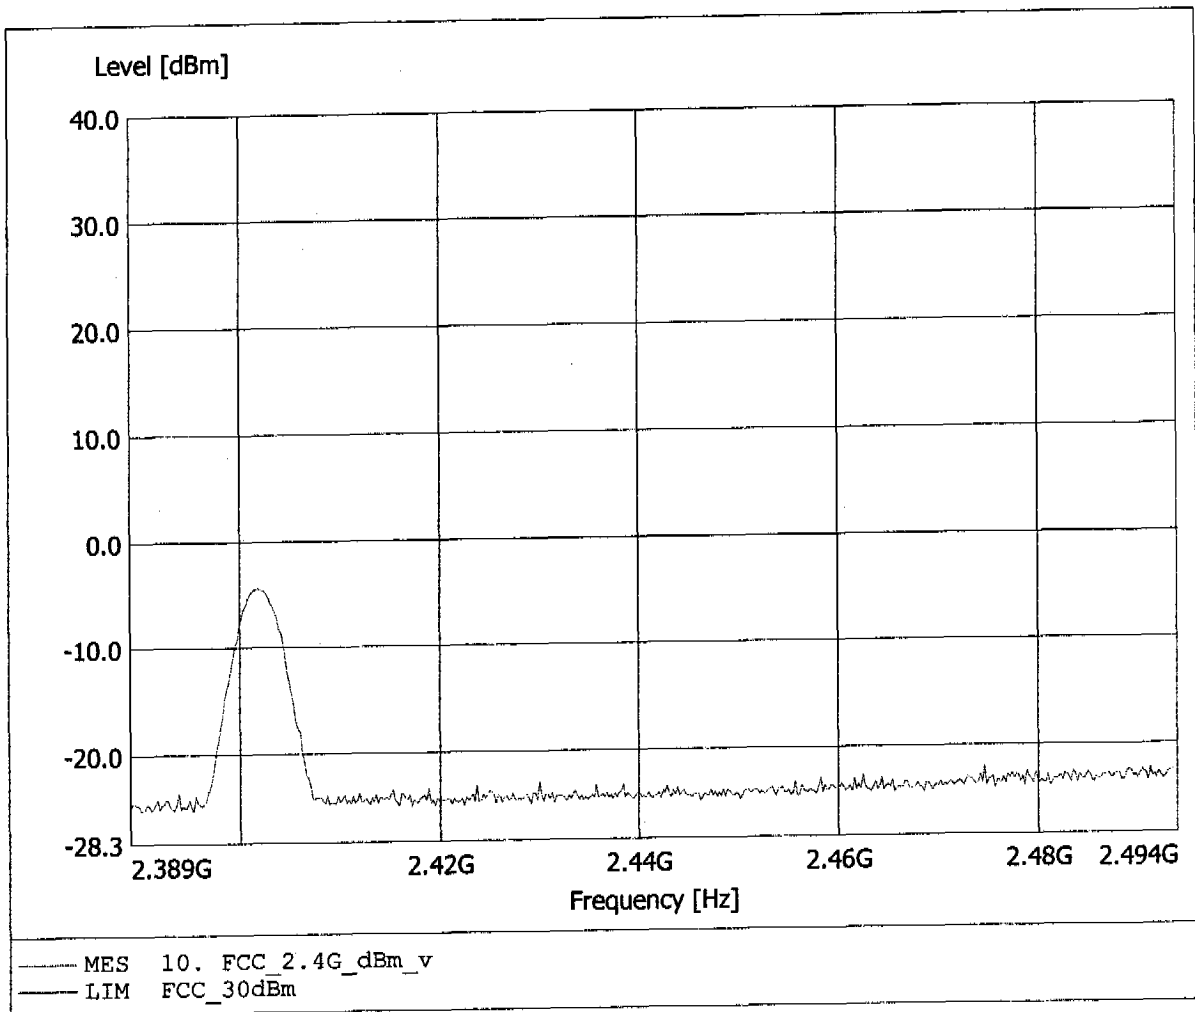


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Bluetooth audio gateway
Model: GN6110CU / 2402 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V +15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: 2.16dBm, RBW: 5MHz

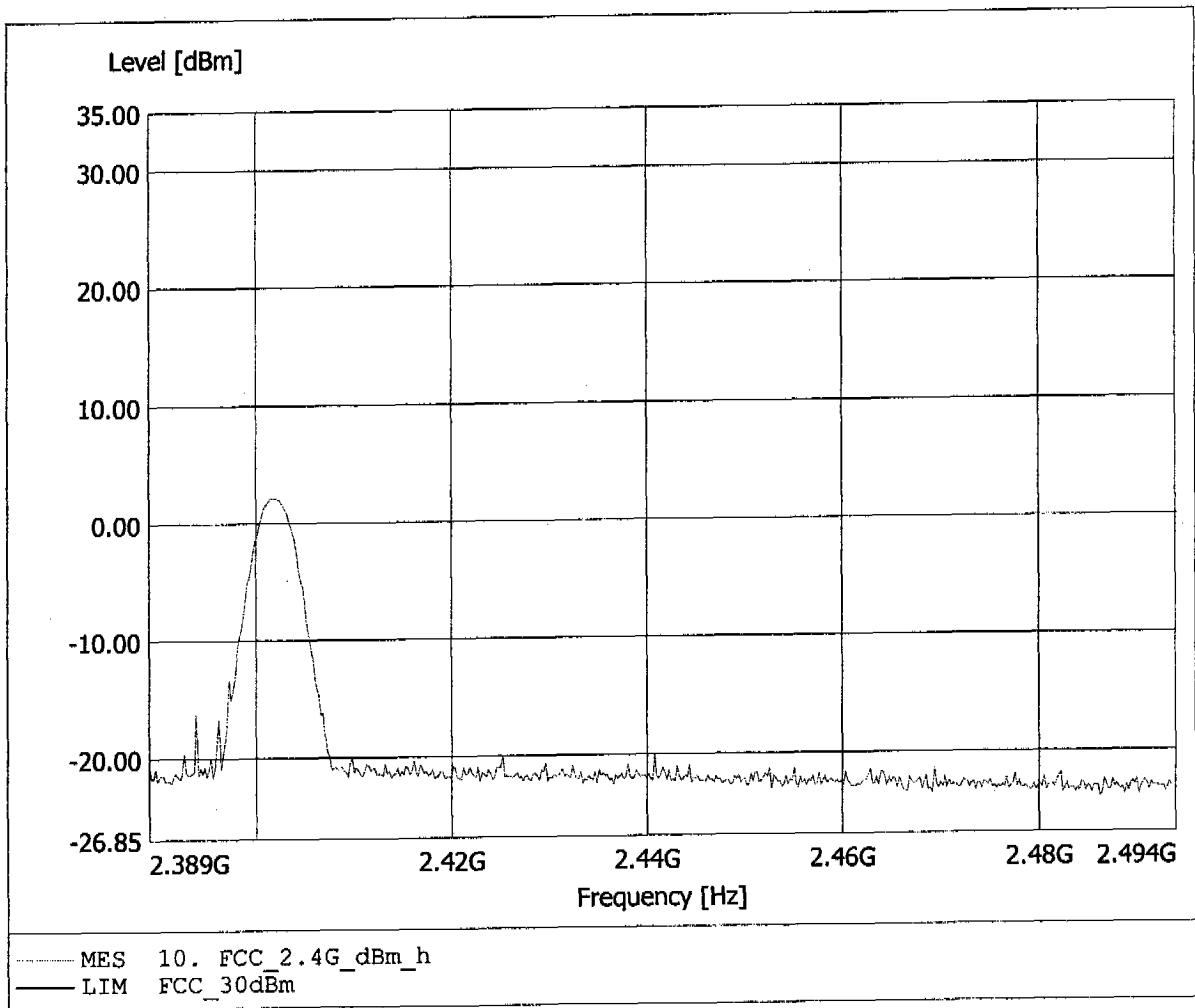


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Bluetooth audio gateway
Model: GN6110CU / 2441 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V +15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -5.97dBm, RBW: 5MHz

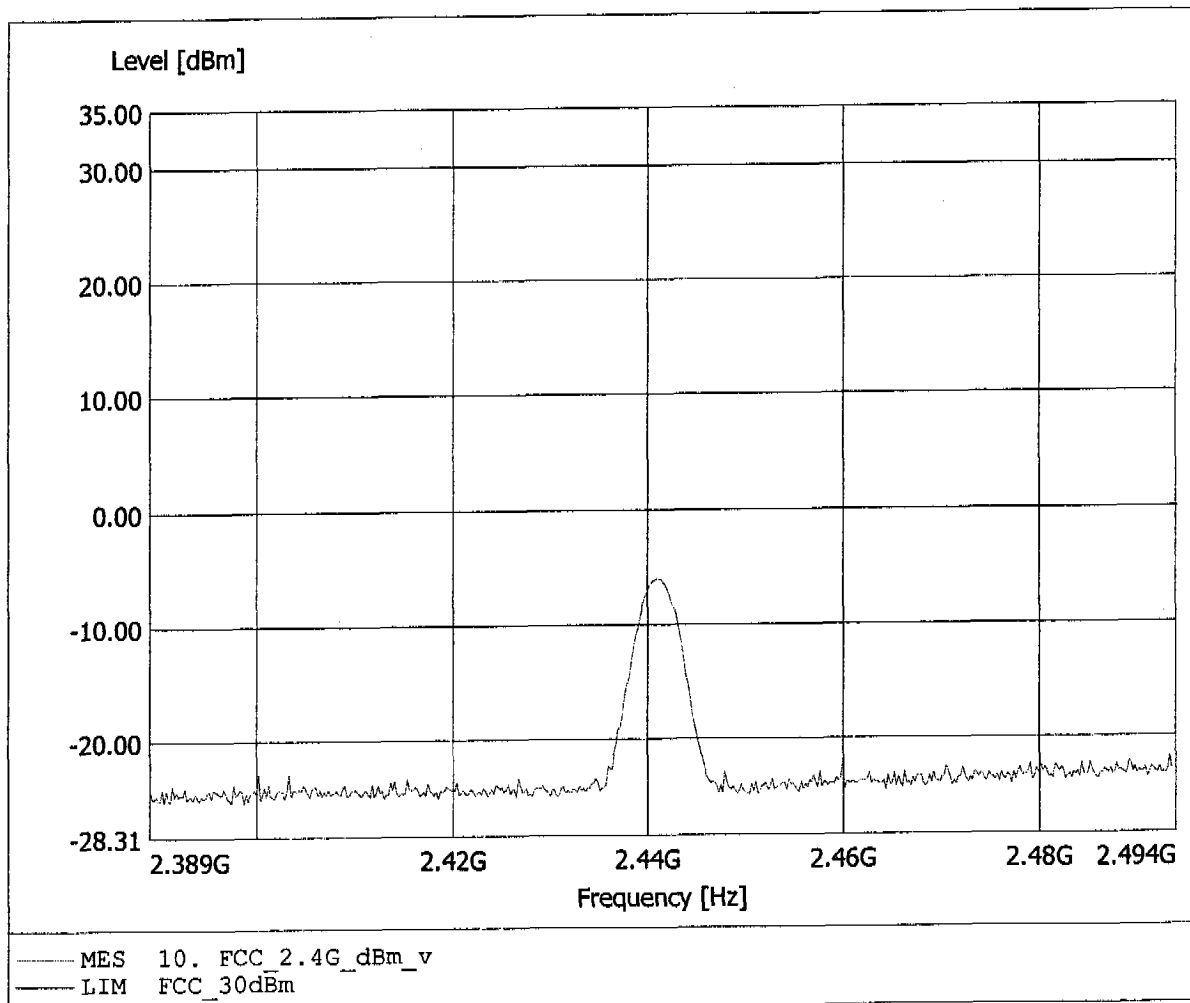


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Bluetooth audio gateway
Model: GN6110CU / 2441 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V +15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -0.55dBm, RBW: 5MHz

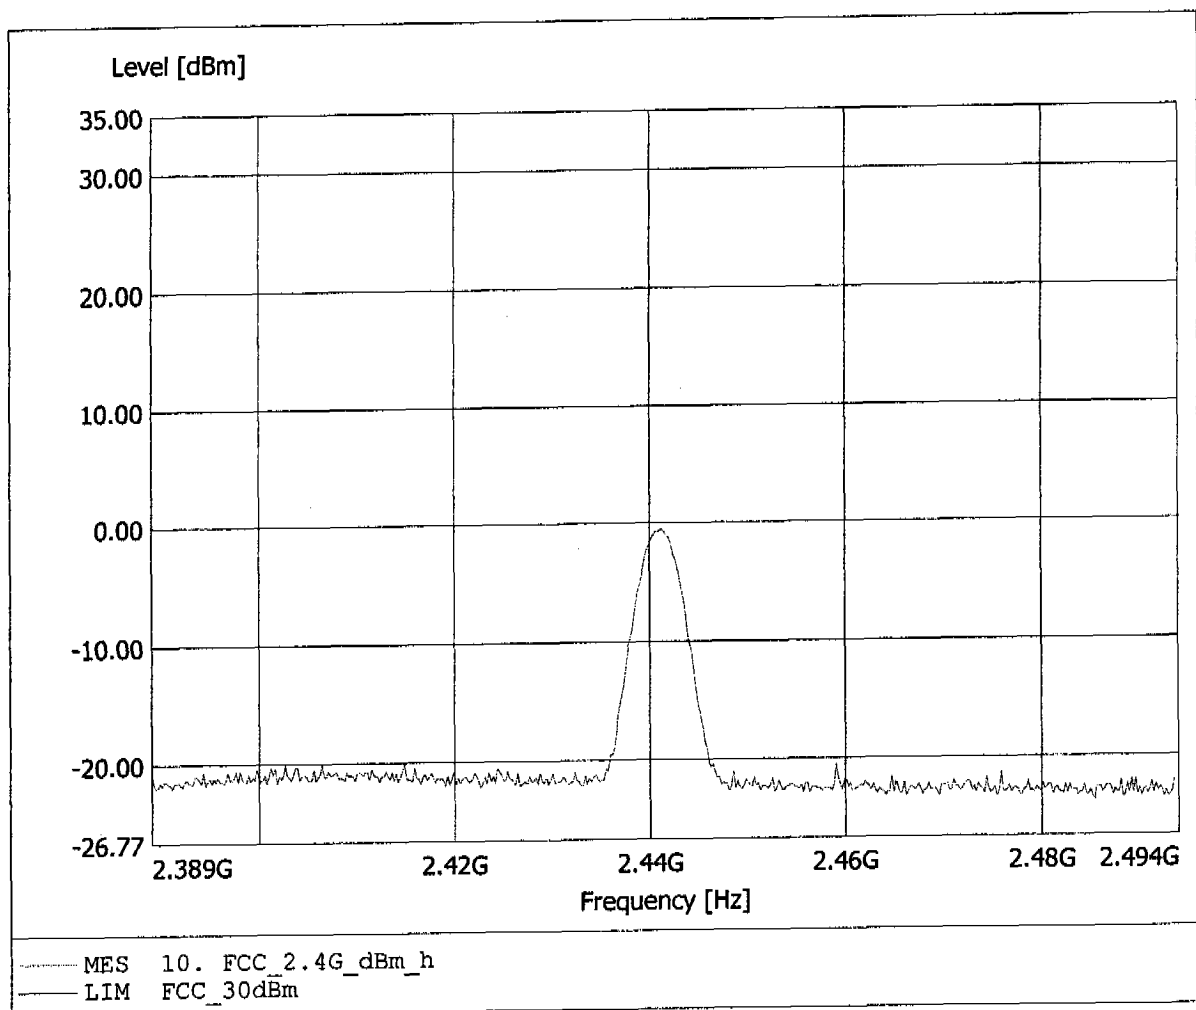


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Bluetooth audio gateway
Model: GN6110CU / 2480 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V +15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.481GHz, Pmax: -2.85dBm, RBW: 5MHz

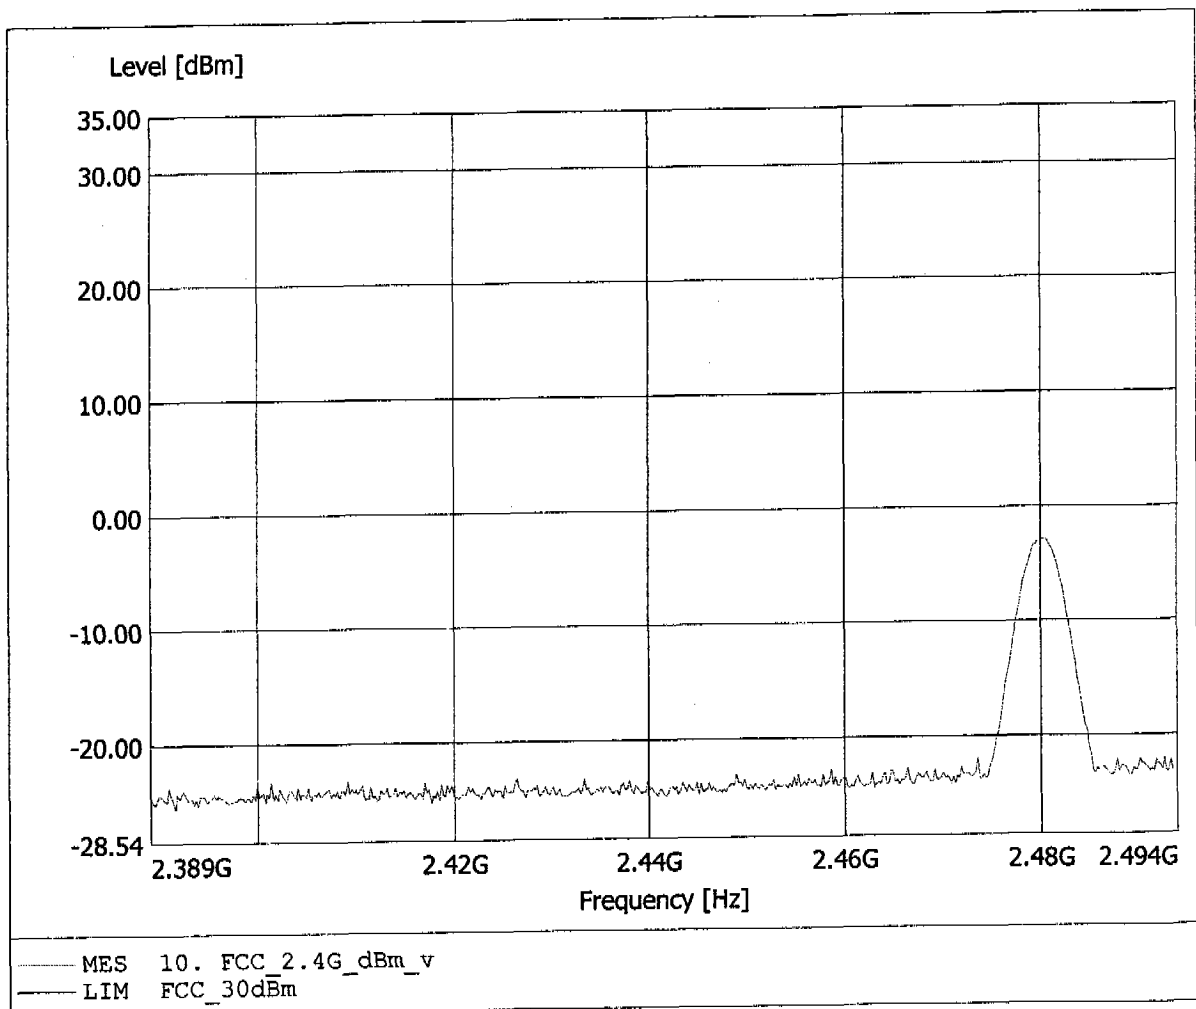


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Bluetooth audio gateway
Model: GN6110CU / 2480 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V +15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: 0.37dBm, RBW: 5MHz

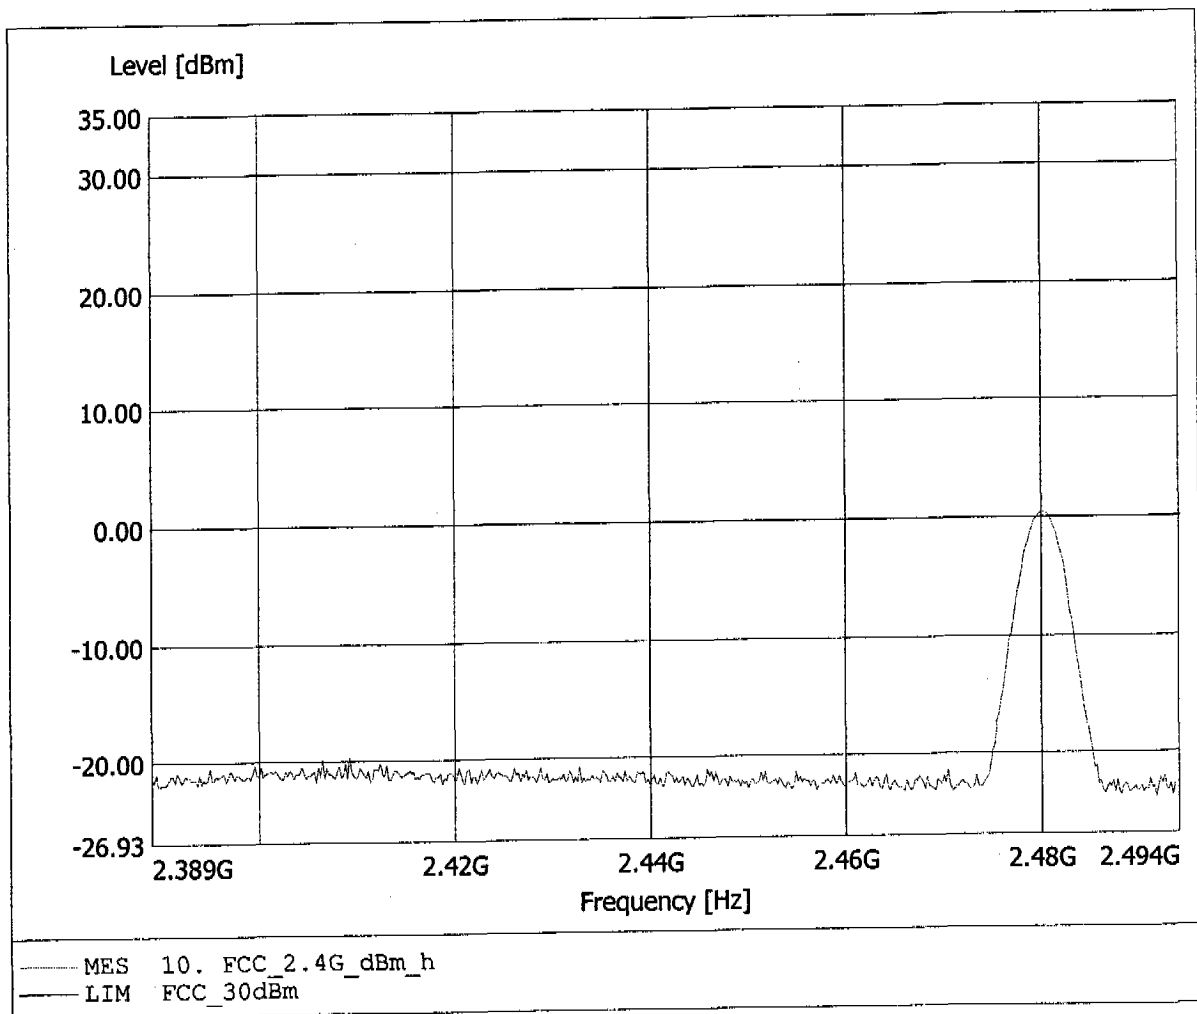


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Bluetooth audio gateway
Model: GN6110CU / 2402 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V -15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: -4.50dBm, RBW: 5MHz

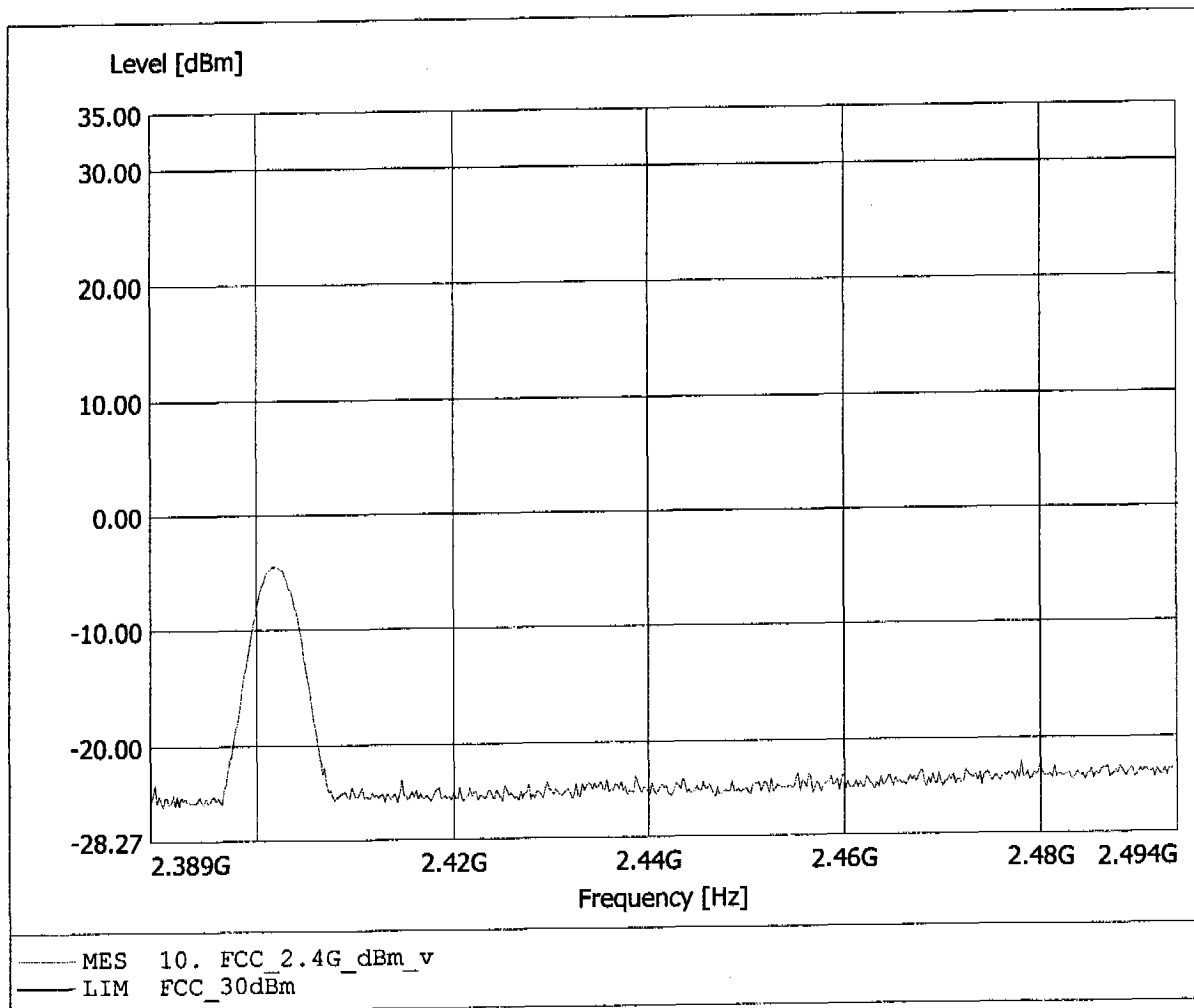


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Bluetooth audio gateway
Model: GN6110CU / 2402 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V -15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: 2.09dBm, RBW: 5MHz

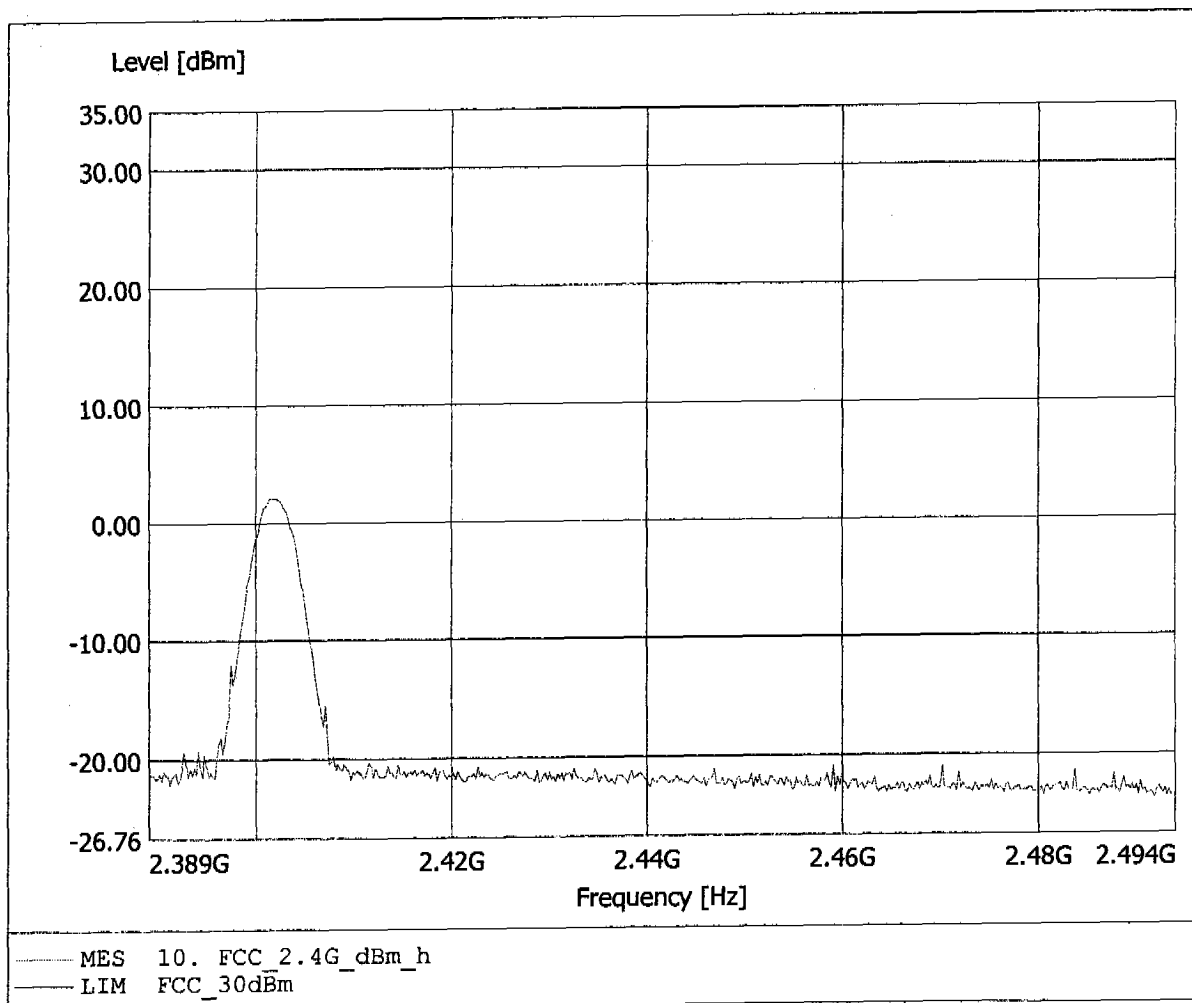


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Bluetooth audio gateway
Model: GN6110CU / 2441 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V -15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -6.00dBm, RBW: 5MHz

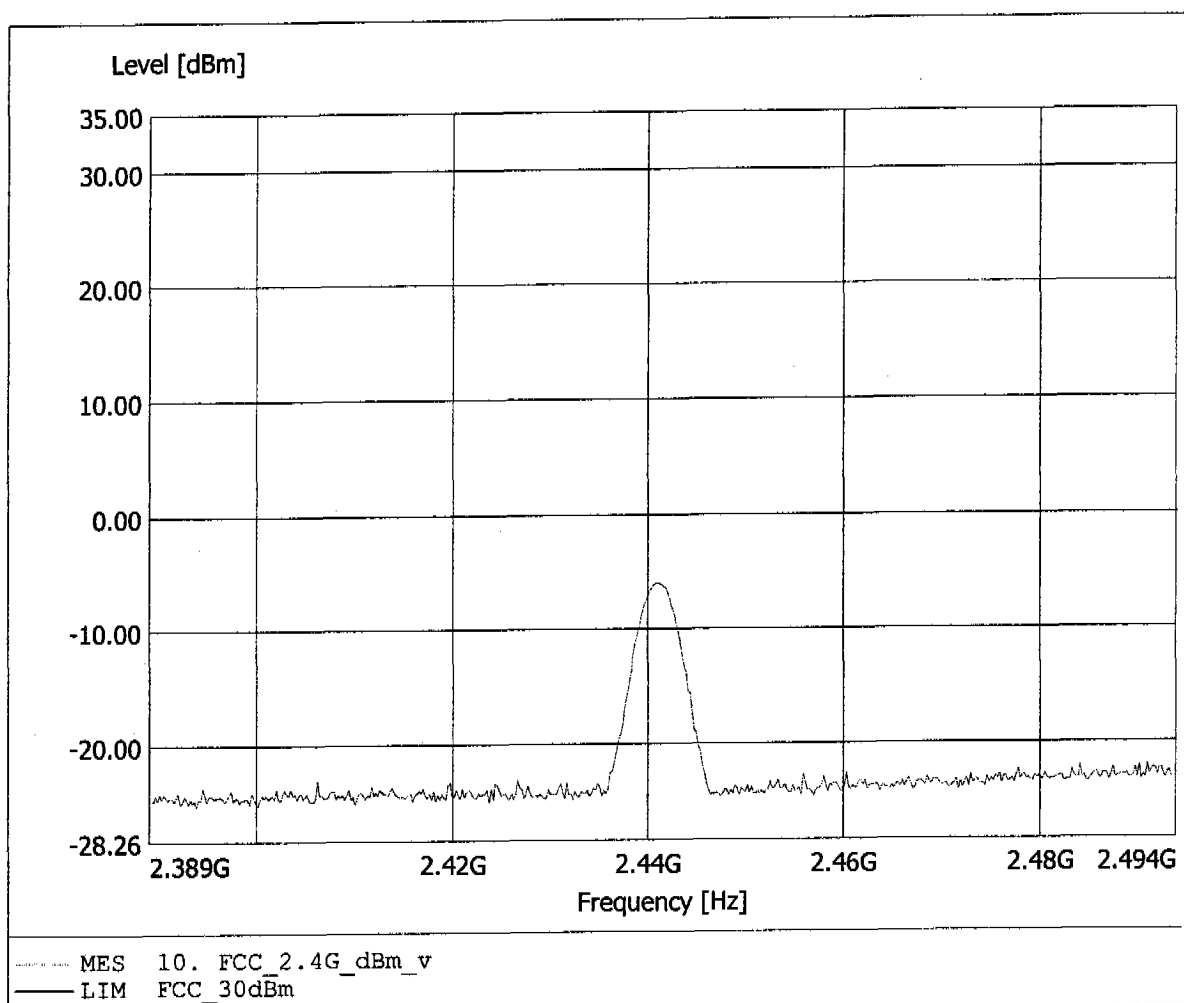


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Bluetooth audio gateway
Model: GN6110CU / 2441 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V -15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -0.53dBm, RBW: 5MHz

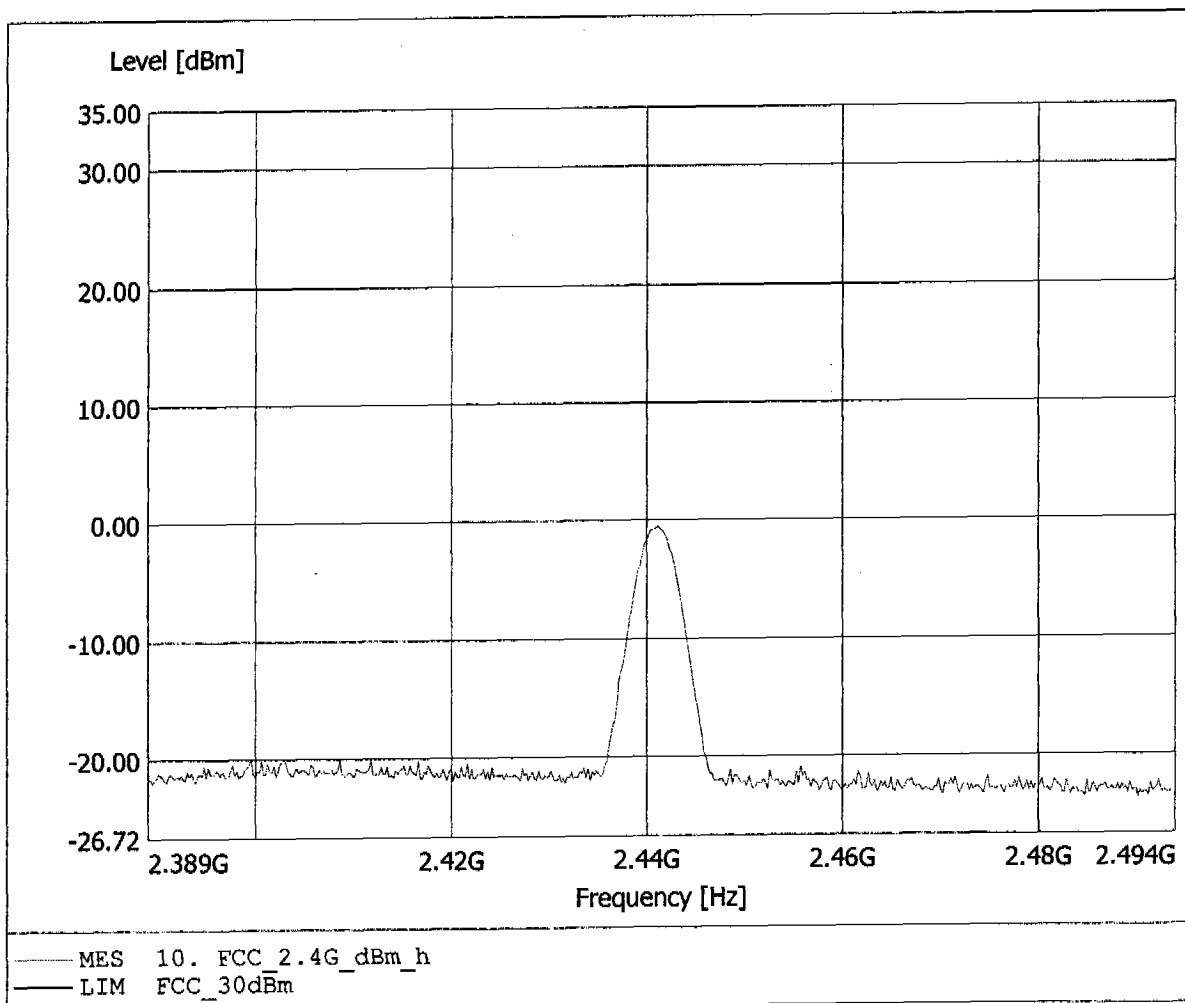


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Bluetooth audio gateway
Model: GN6110CU / 2480 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V -15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: -2.74dBm, RBW: 5MHz

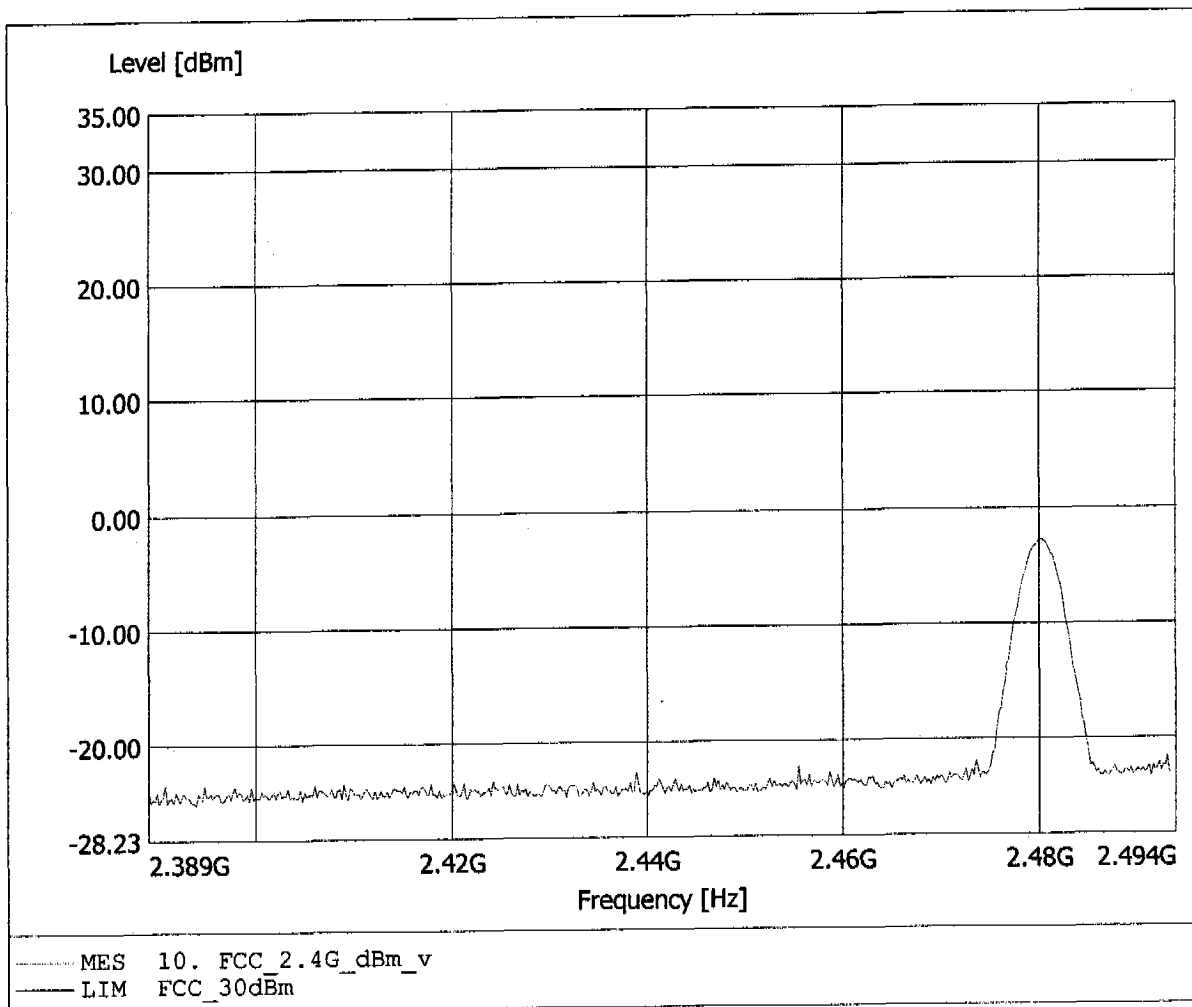

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Bluetooth audio gateway
Model: GN6110CU / 2480 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V -15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D.
Comment 2: Freq: 2.480GHz, Pmax: 0.57dBm, RBW: 5MHz

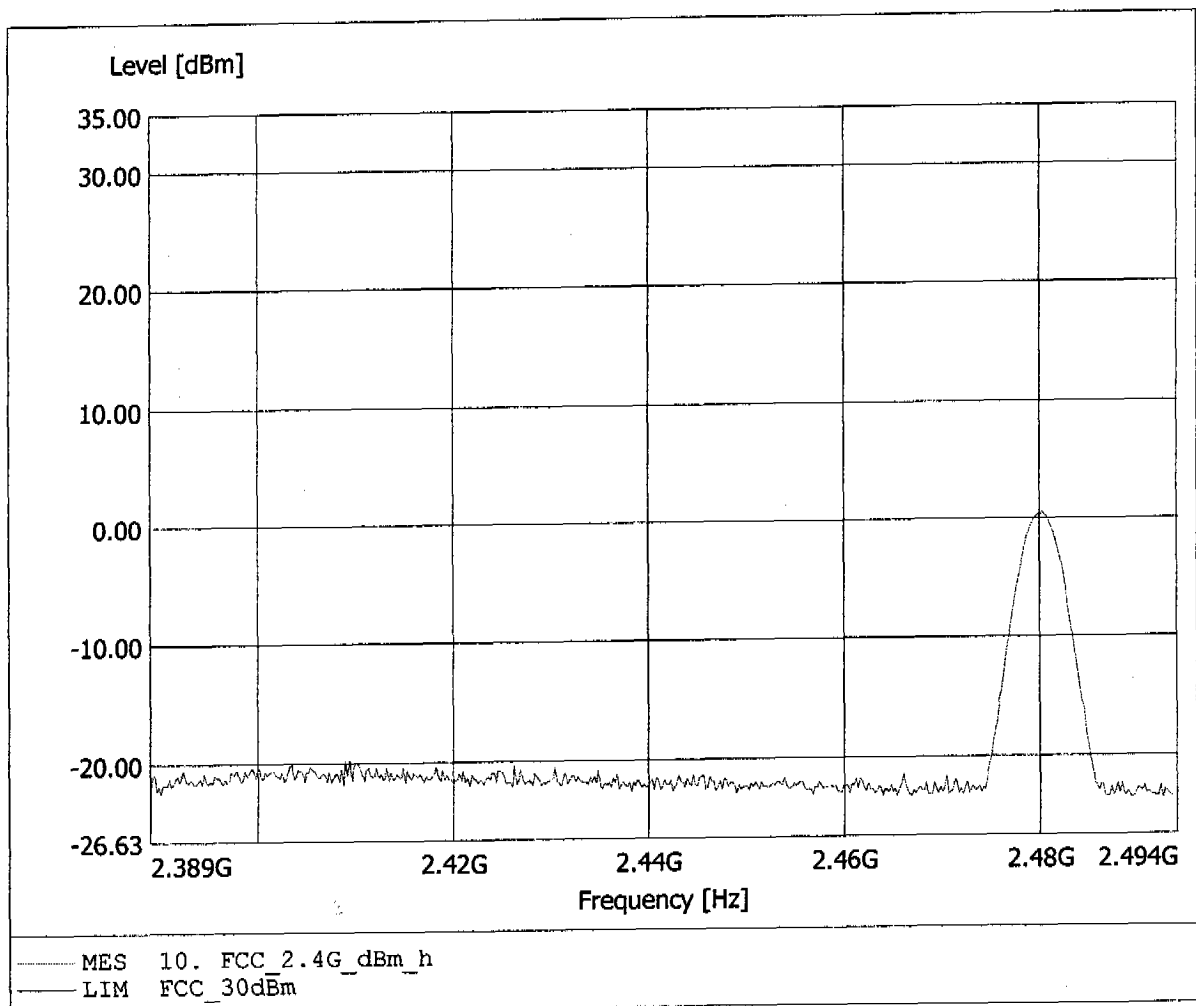




Appendix C

Spurious Emissions radiated - Transmitter operating


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

EUT: Bluetooth audio gateway
Model: GN6110CU / 2402 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Emax: 94.17dBµV/m, RBW: 1MHz

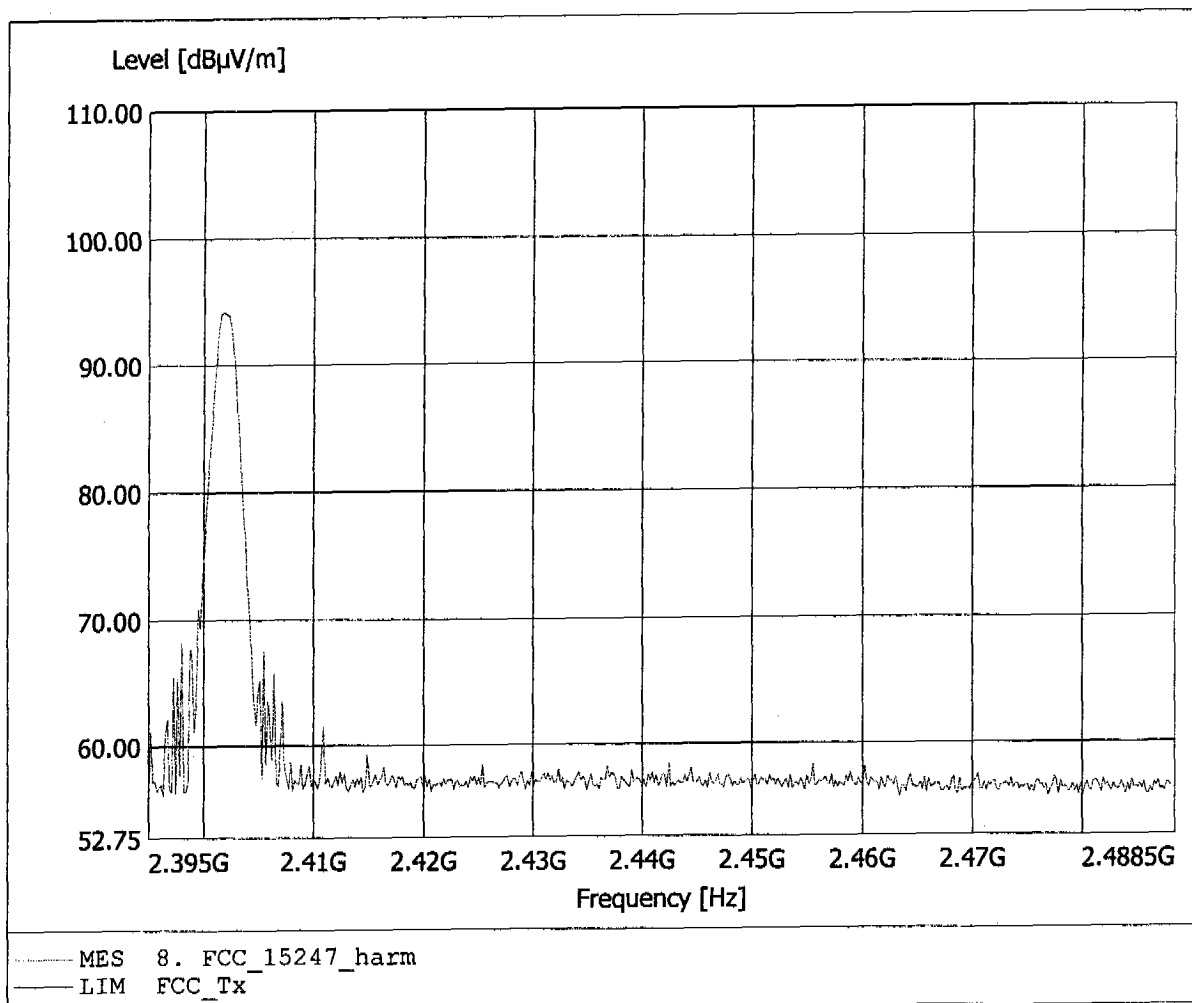


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2402 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 180.240MHz, Emax: 30.07dBµV/m, RBW: 100kHz

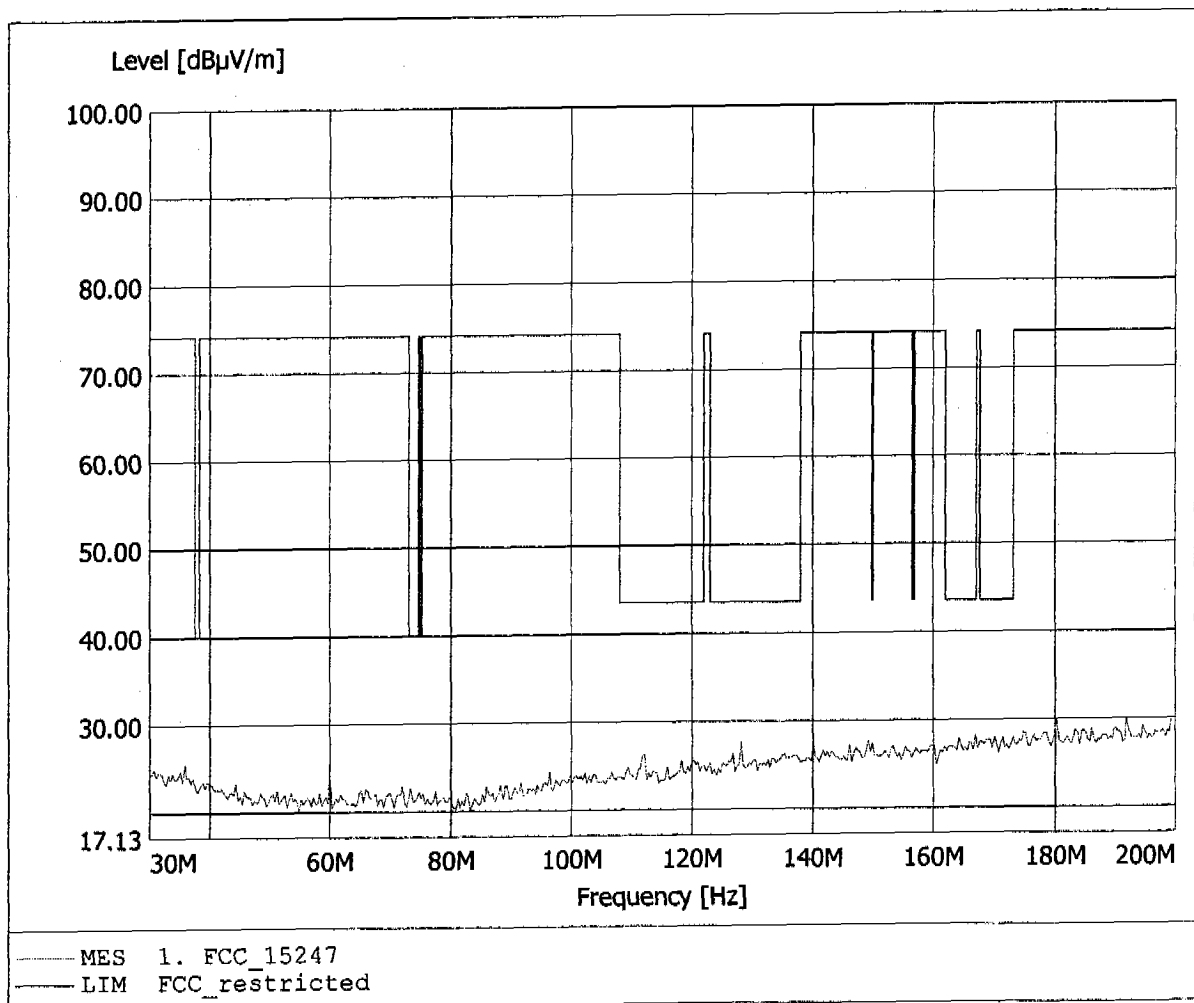


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2402 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 160.140MHz, Emax: 32.29dBµV/m, RBW: 100kHz

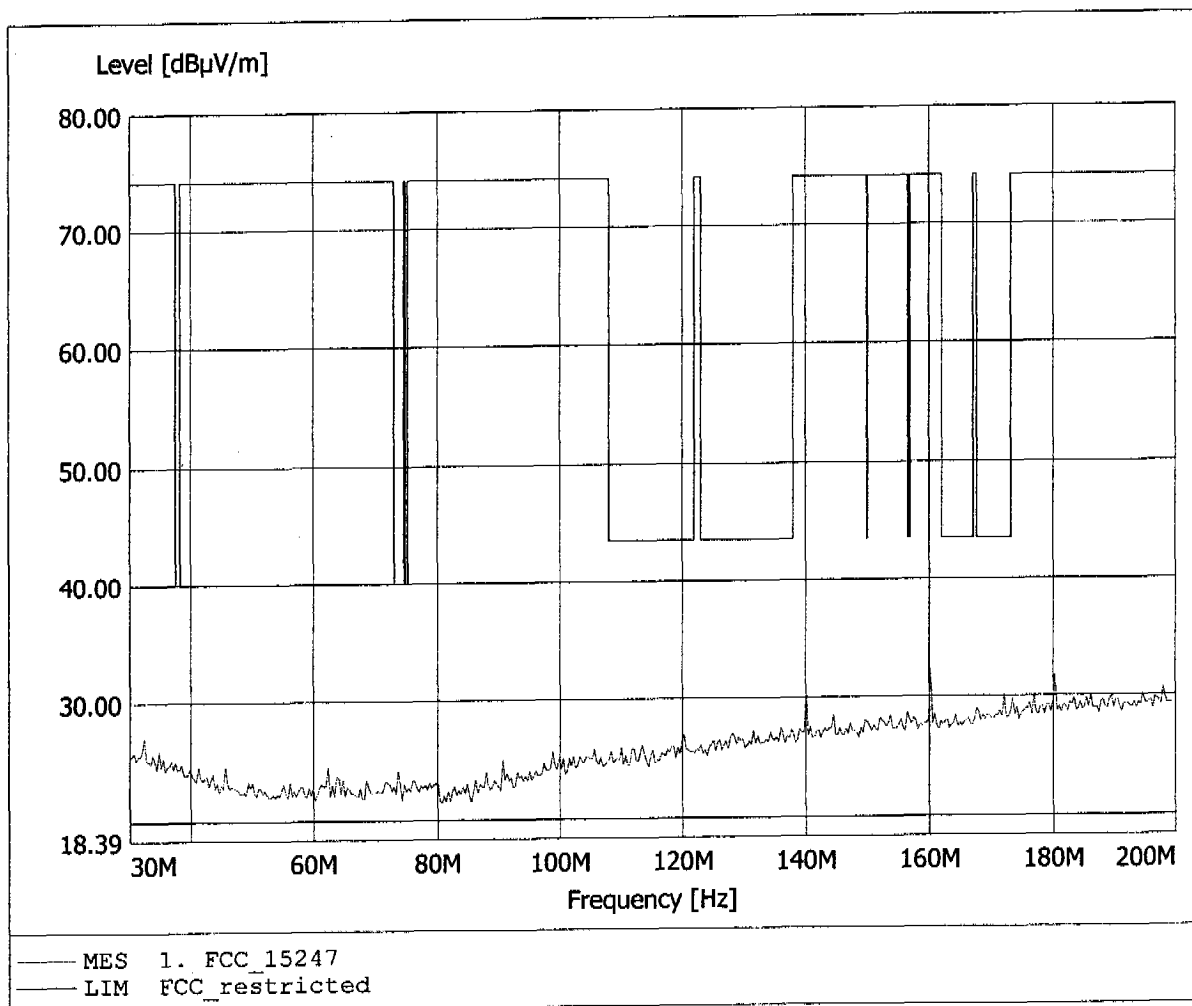


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2402 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 360.321MHz, Emax: 32.28dBµV/m, RBW: 100kHz

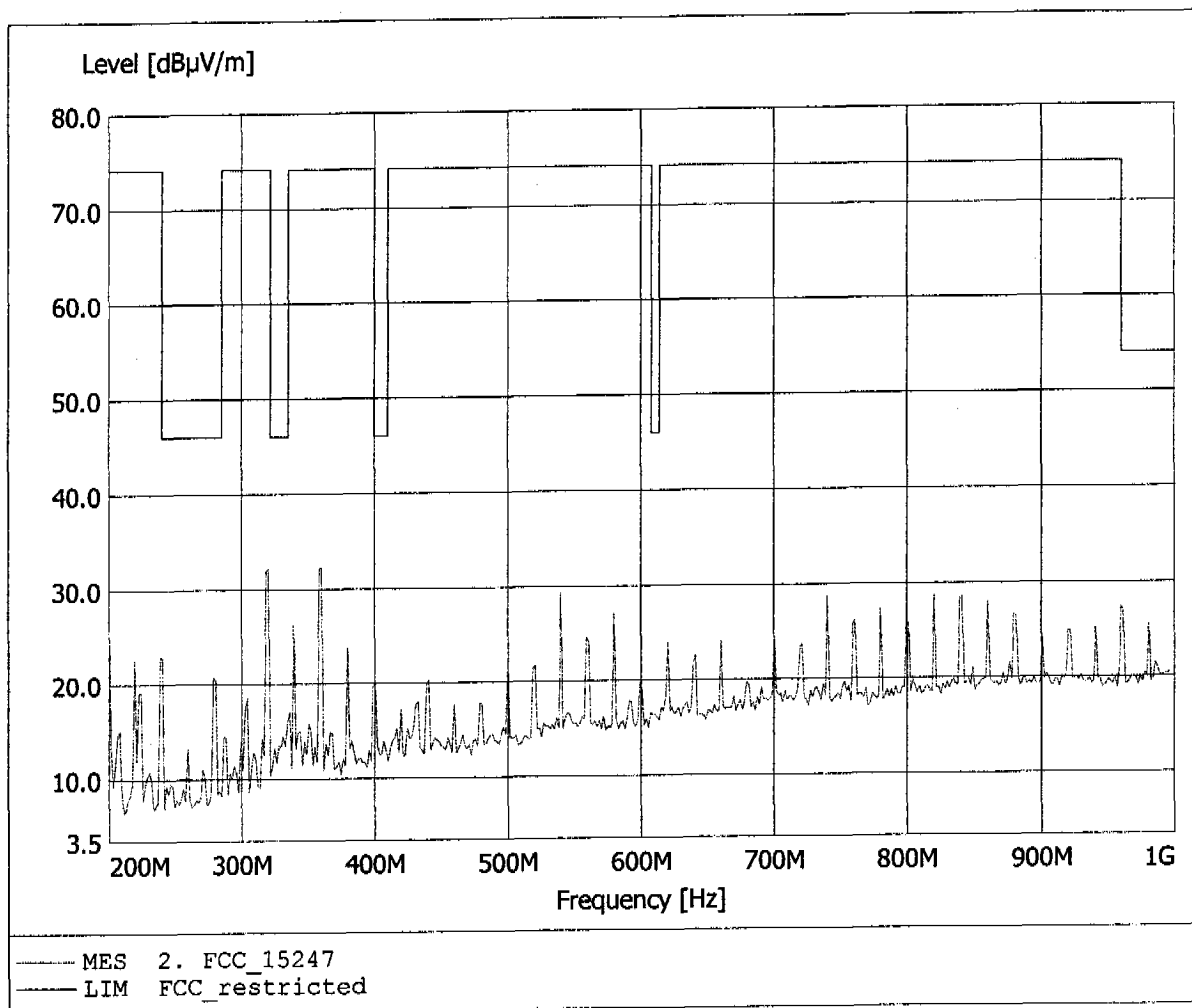


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2402 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, -amplif.
Comment 2: Freq: 320.240MHz, Emax: 35.15dBµV/m, RBW: 100kHz

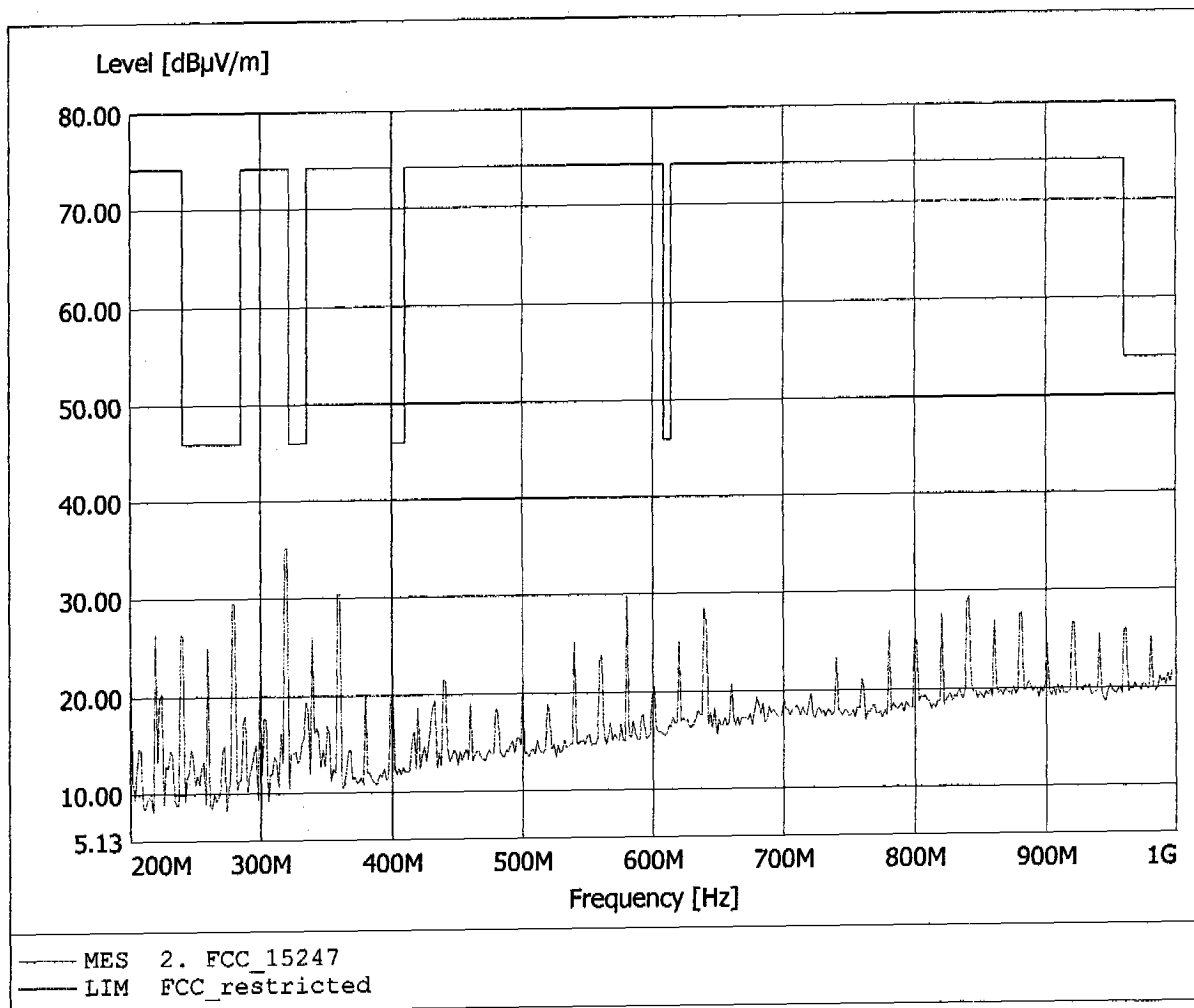


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2402 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 58.68dBµV/m, RBW: 1MHz

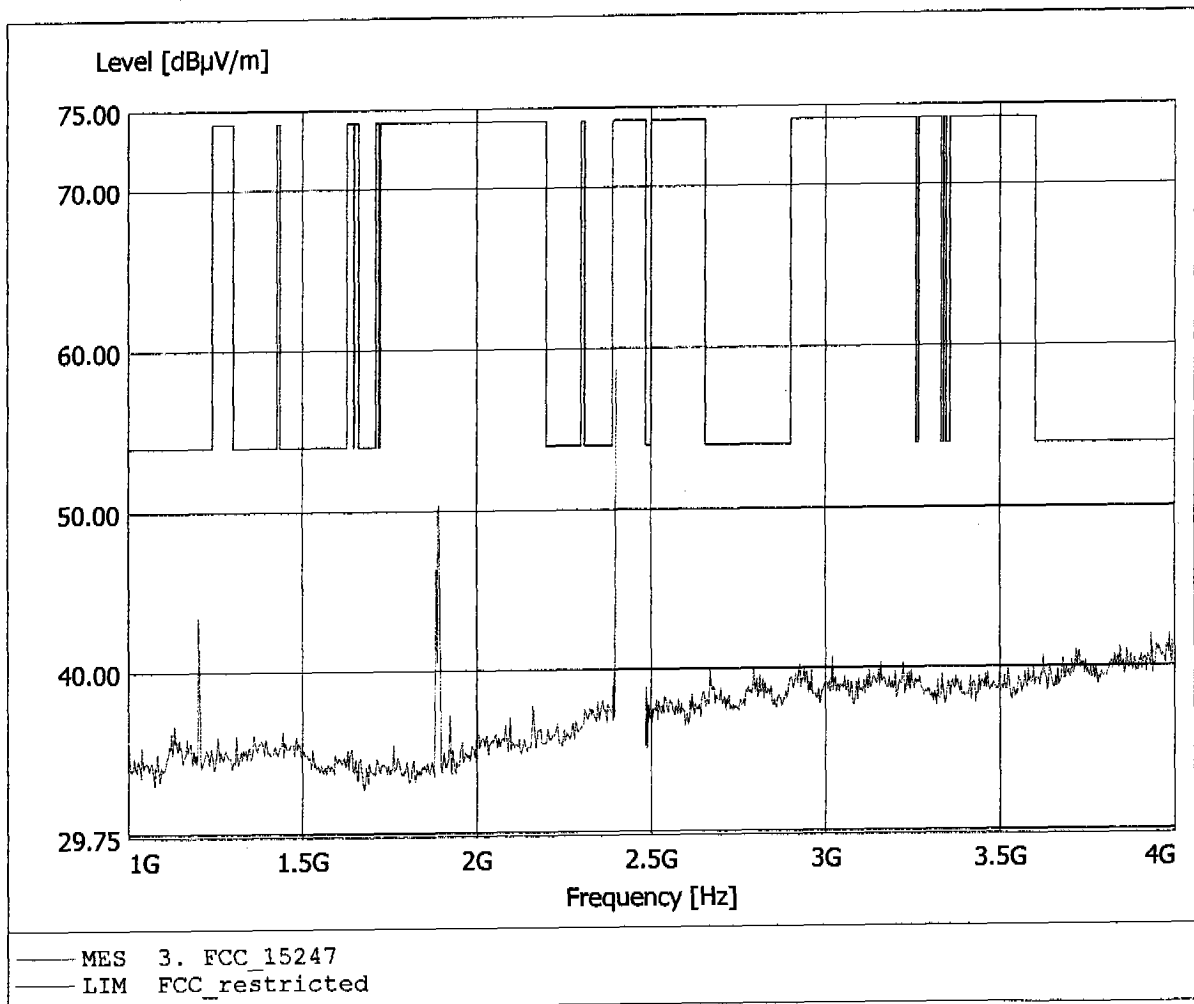


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2402 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 58.68dBµV/m, RBW: 1MHz

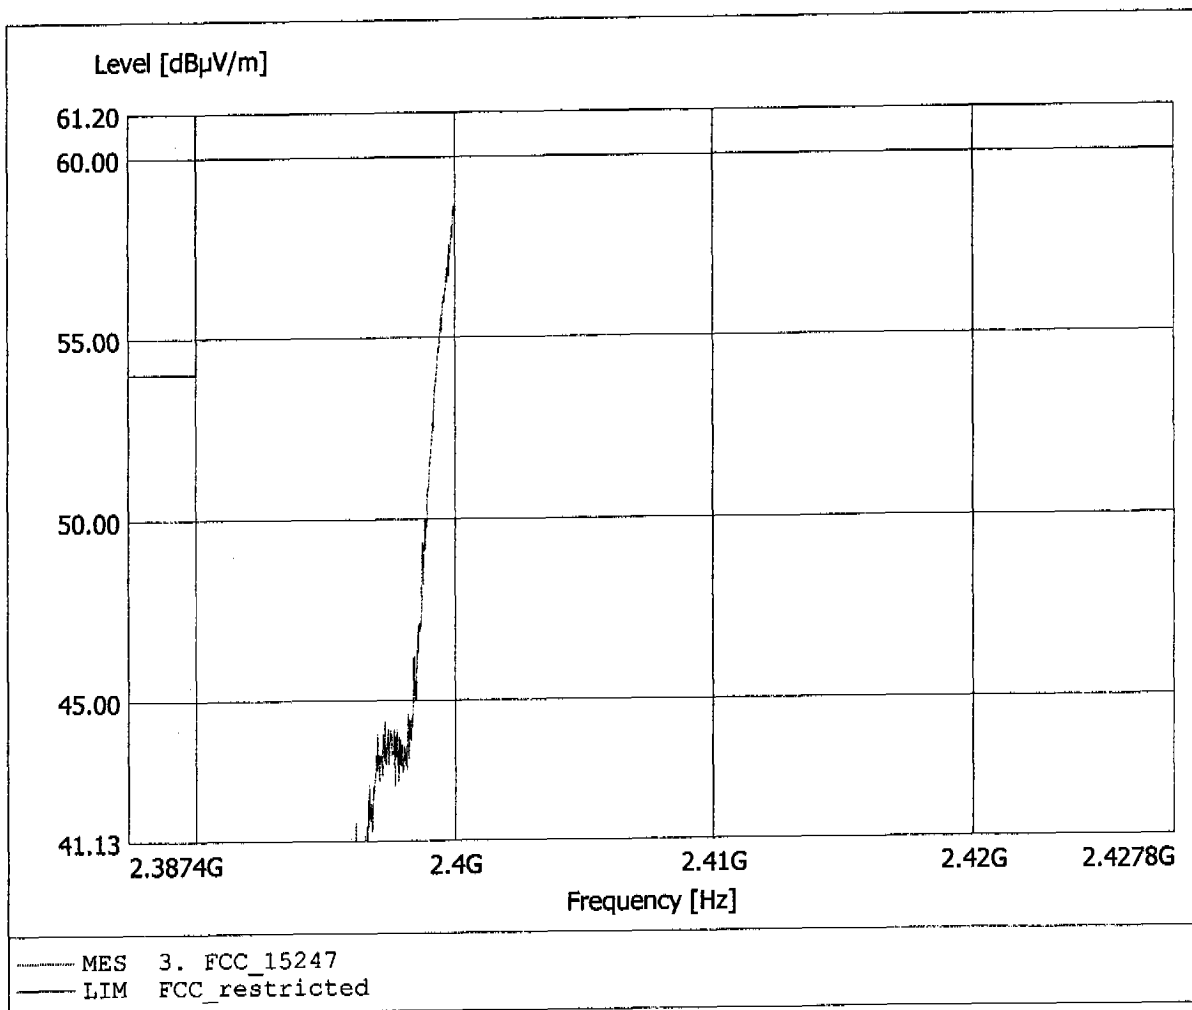


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2402 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 61.89dBµV/m, RBW: 1MHz

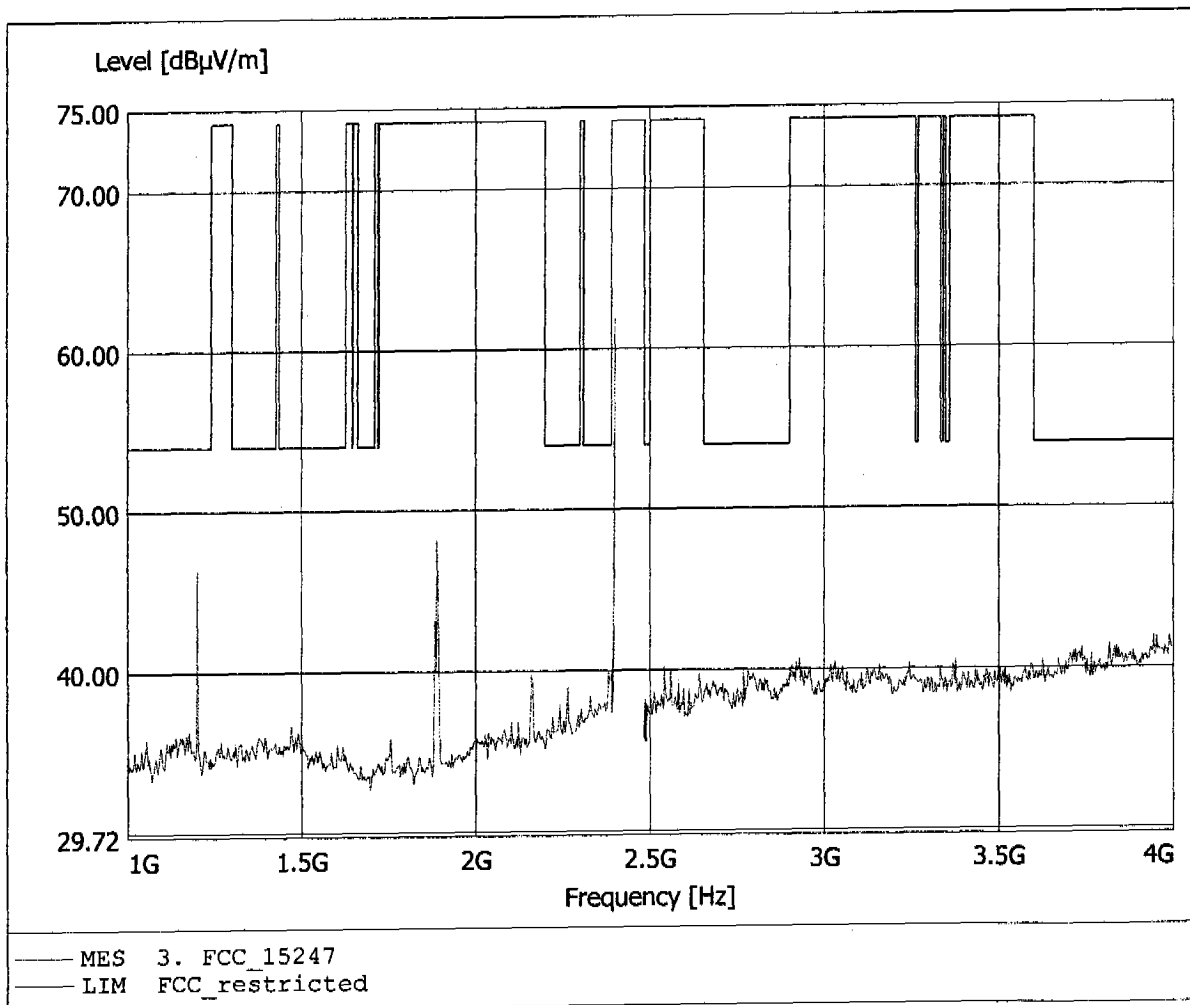


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2402 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 61.89dBµV/m, RBW: 1MHz

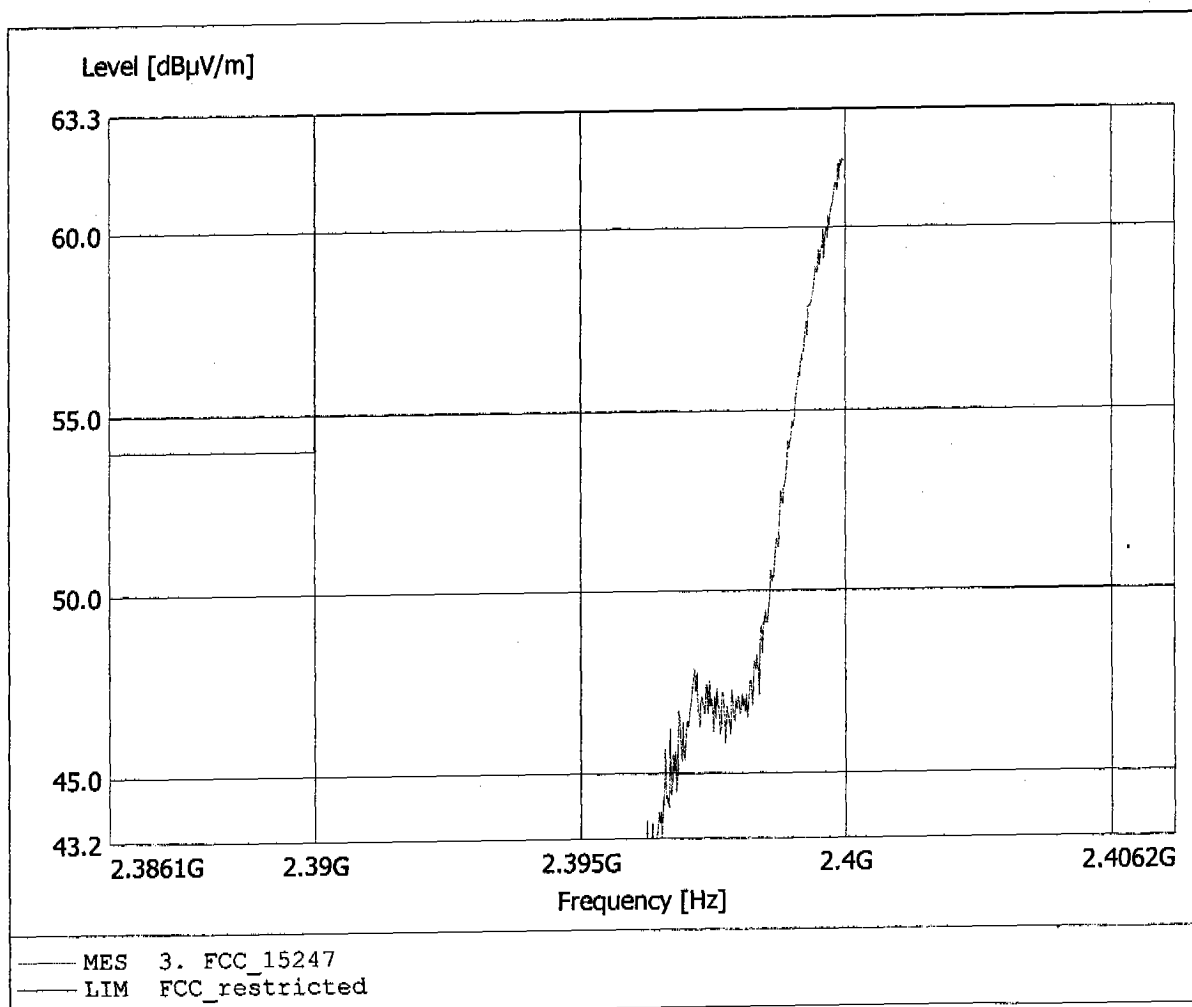


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2402 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.784GHz, Emax: 37.21dBµV/m, RBW: 1MHz

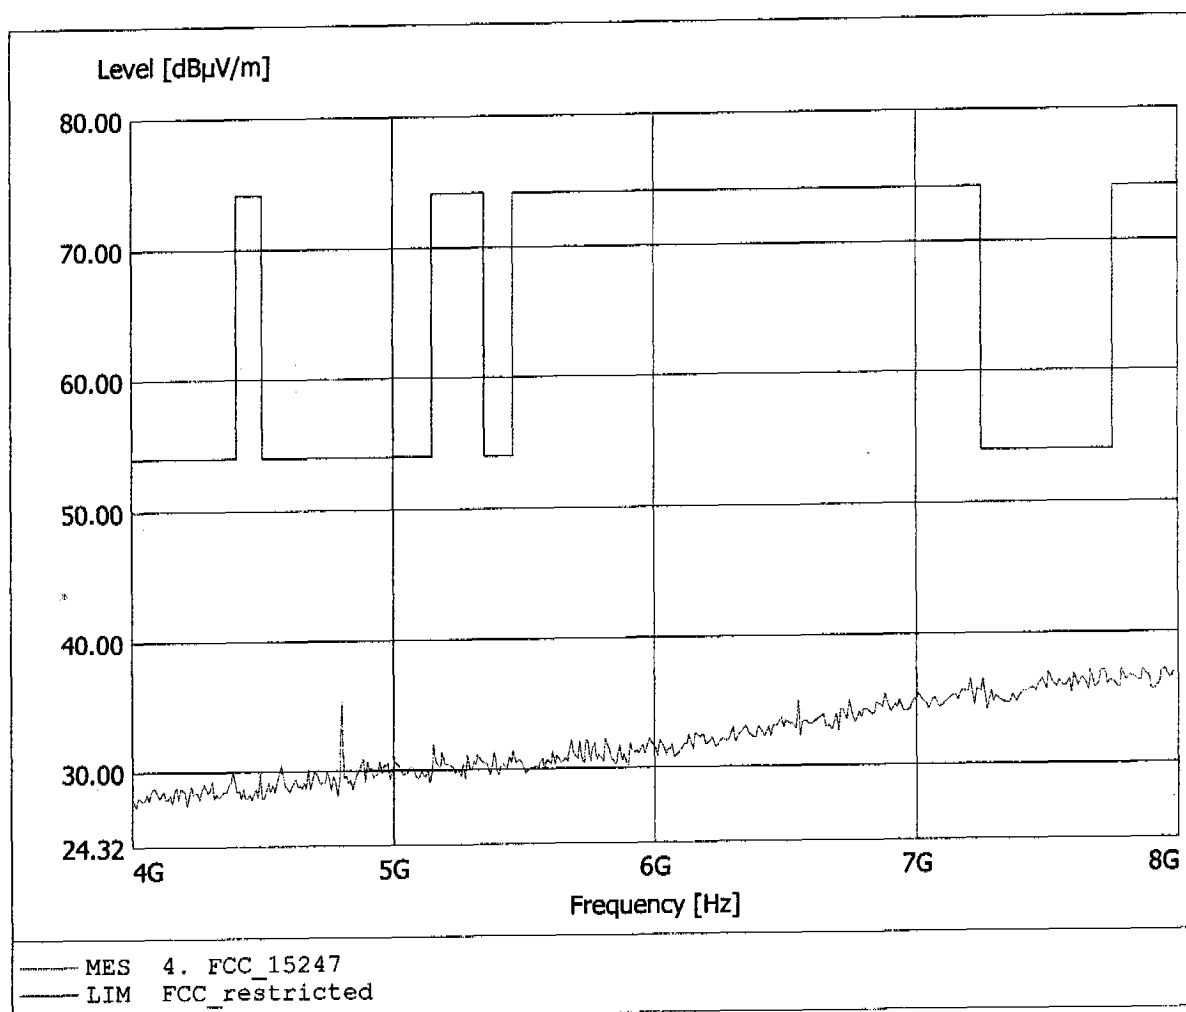


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2402 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.992GHz, Emax: 37.81dBuV/m, RBW: 1MHz

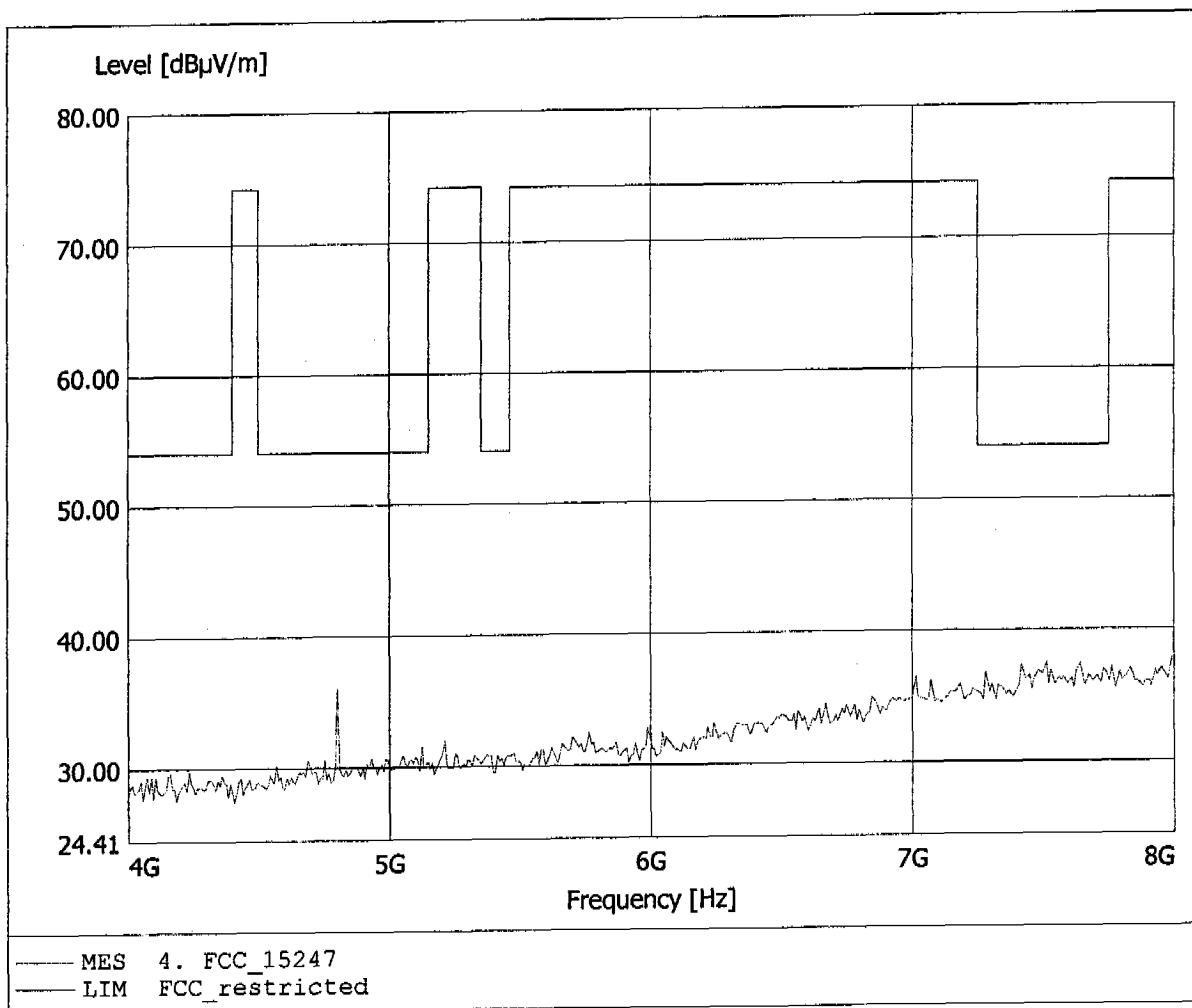


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2402 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.-
Comment 2: Freq: 11.070GHz, Emax: 42.58dBµV/m, RBW: 1MHz

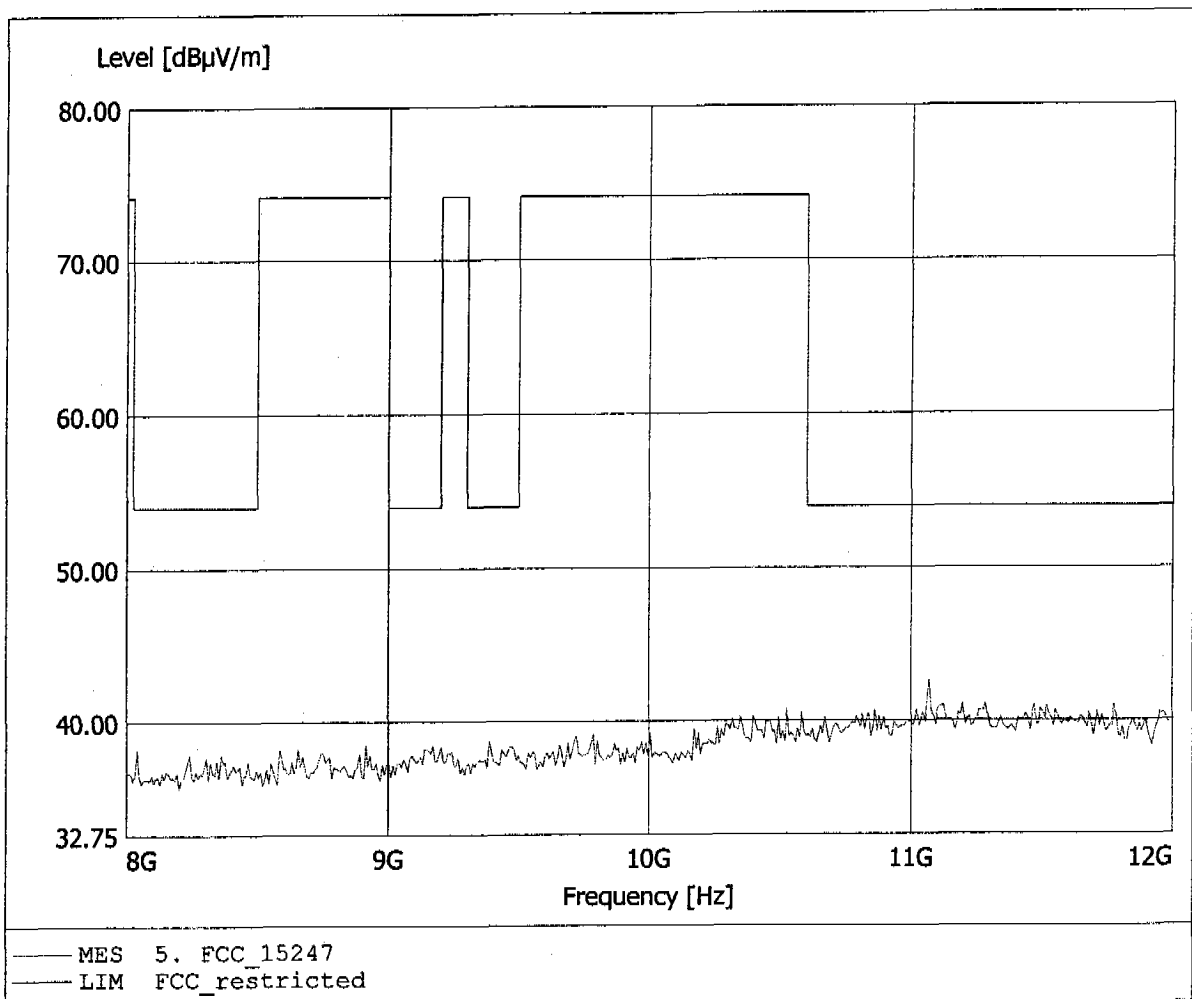


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2402 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.142GHz, Emax: 41.25dBuV/m, RBW: 1MHz

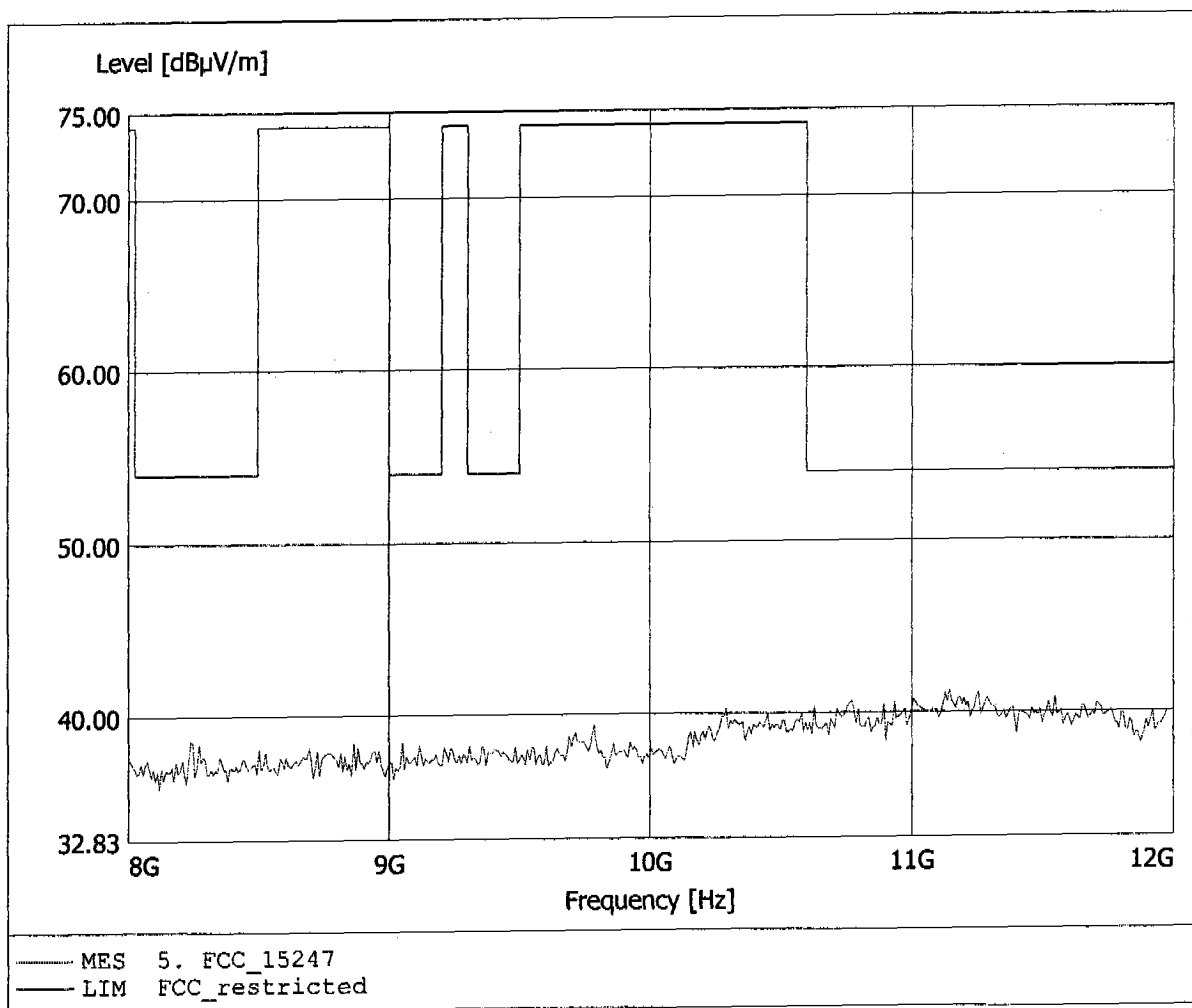


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2402 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.725GHz, Emax: 43.96dBµV/m, RBW: 1MHz

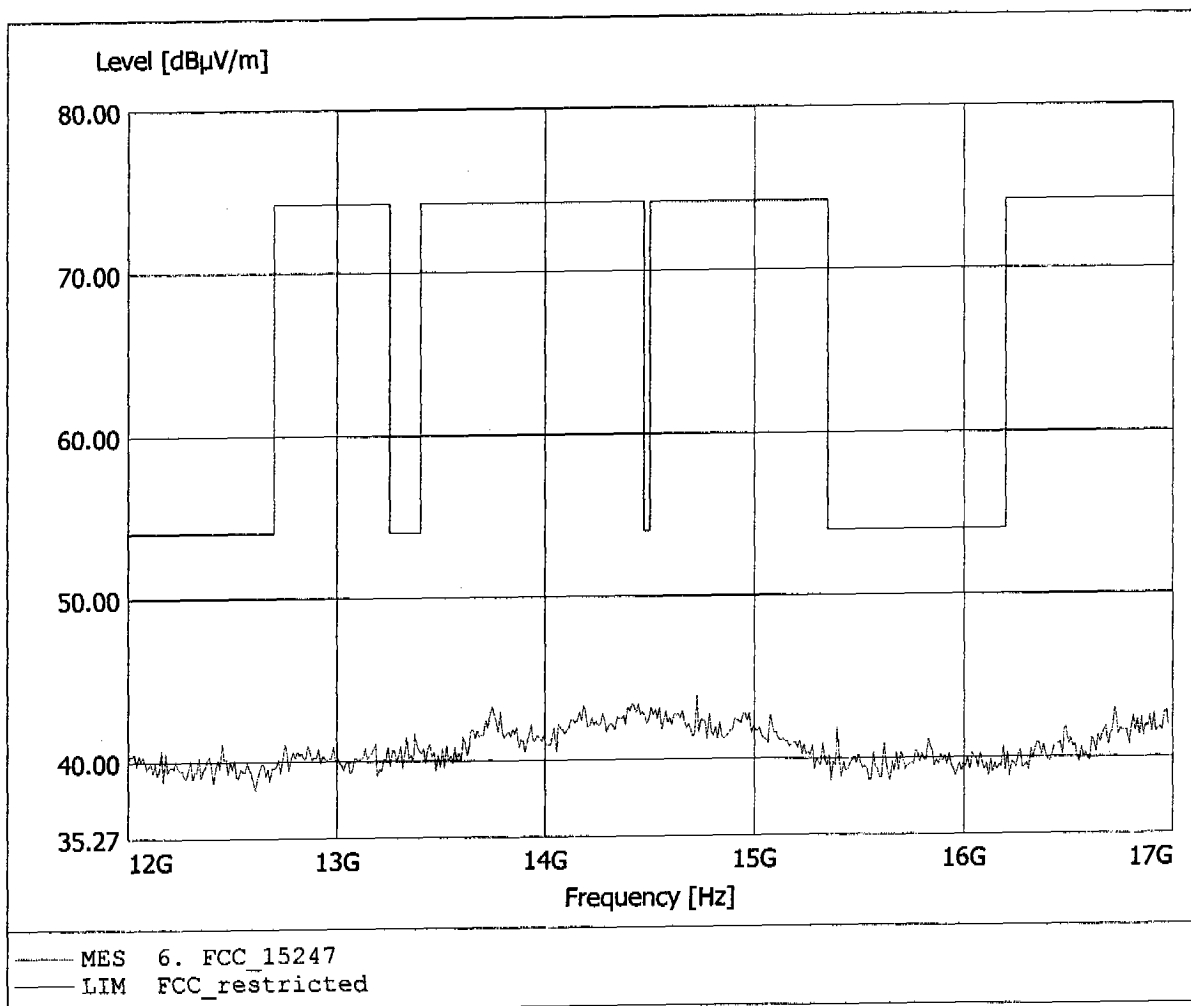


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2402 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.745GHz, Emax: 43.68dBuV/m, RBW: 1MHz

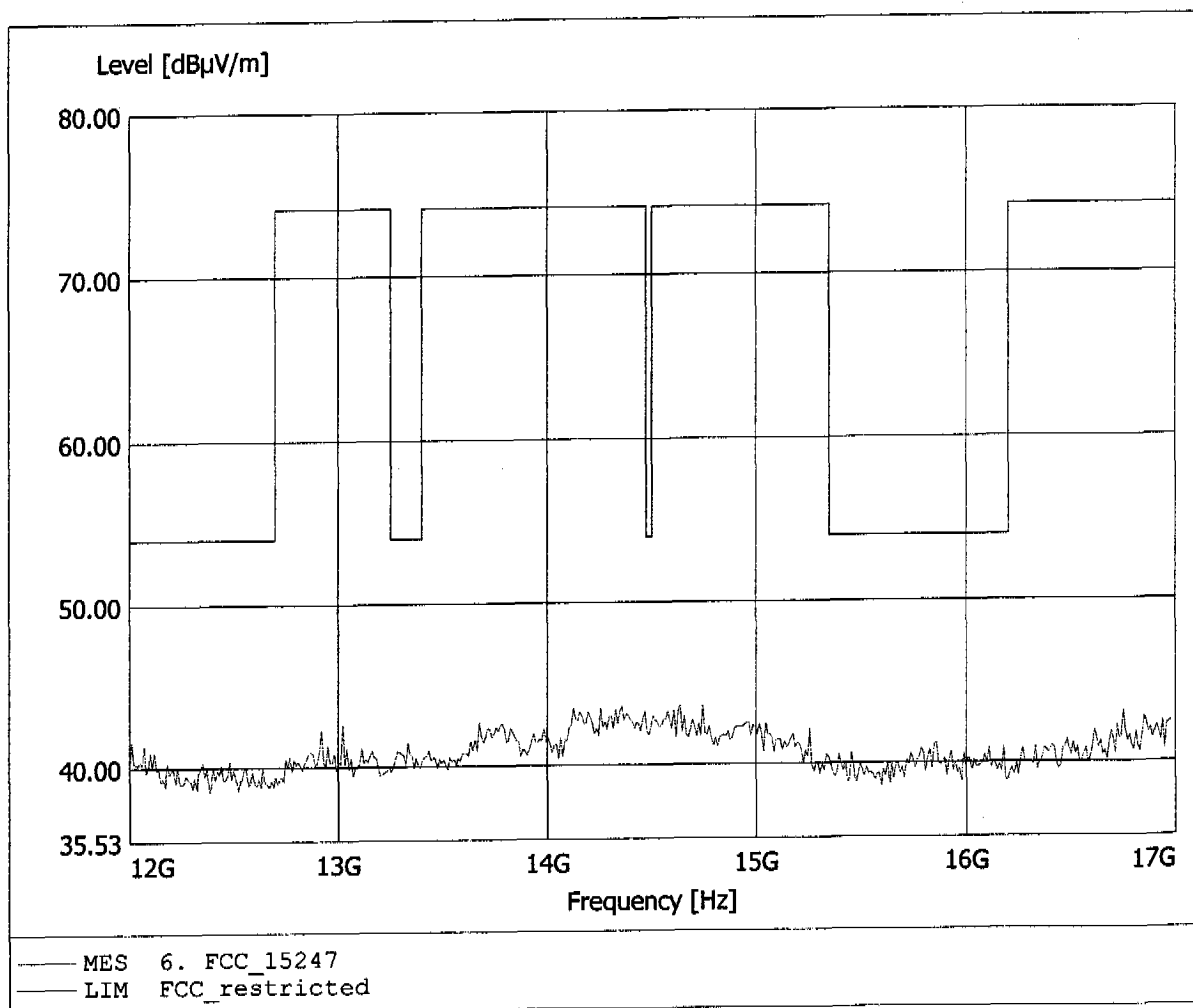


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2402 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 44.41dBµV/m, RBW: 1MHz

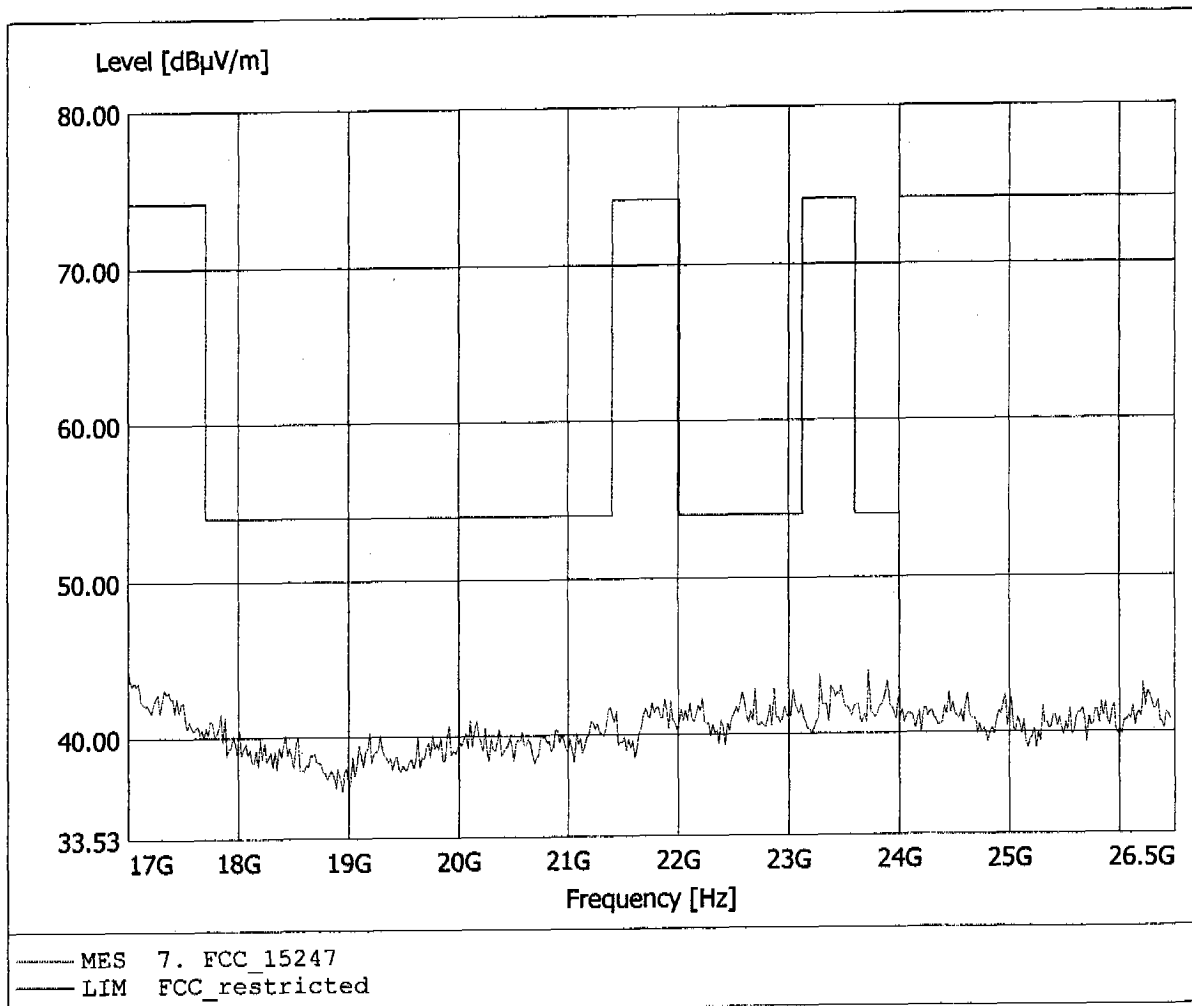


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2402 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.038GHz, Emax: 45.01dBµV/m, RBW: 1MHz

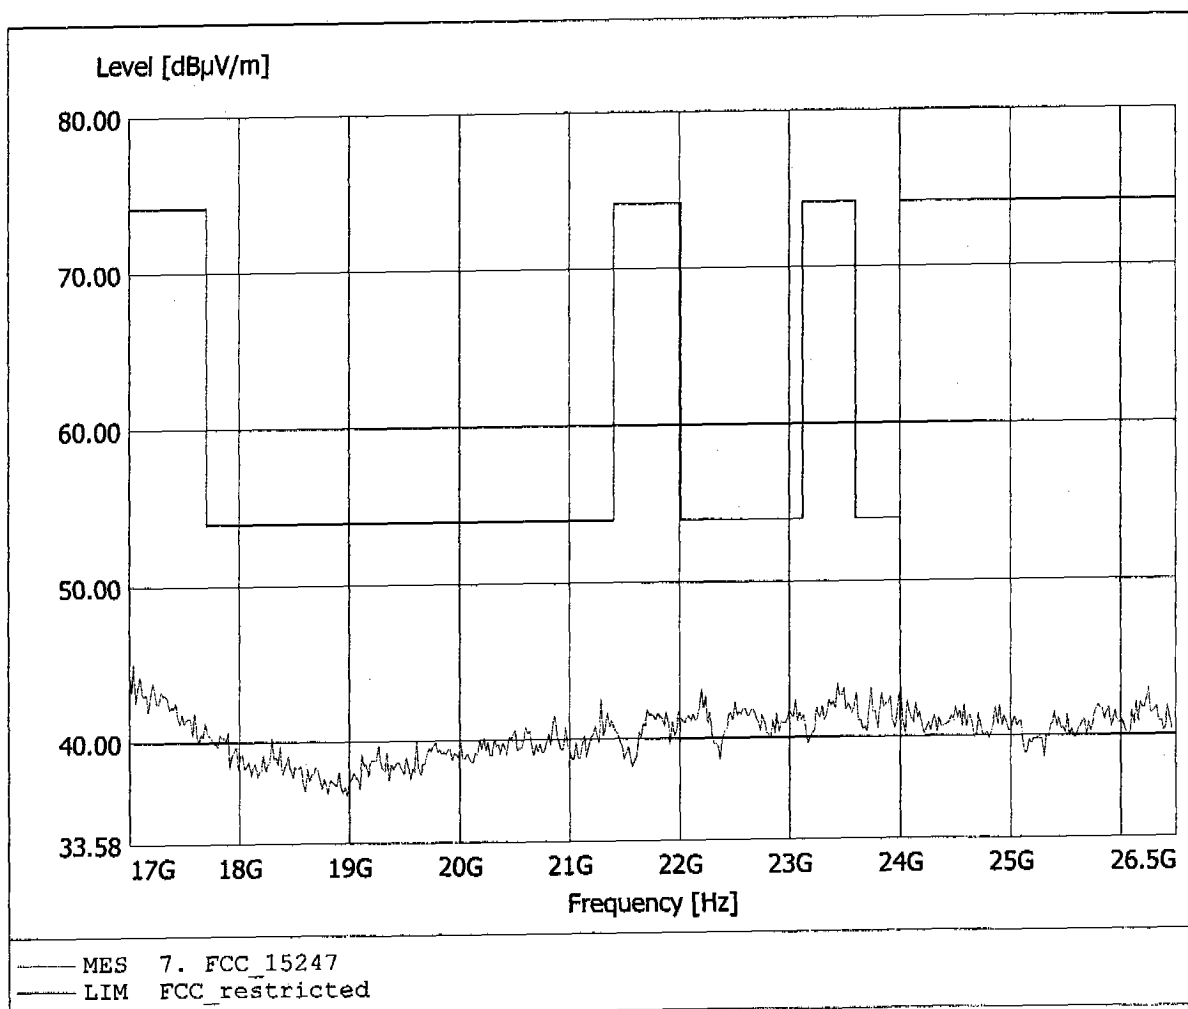


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2441 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 180.240MHz, Emax: 31.96dBµV/m, RBW: 100kHz

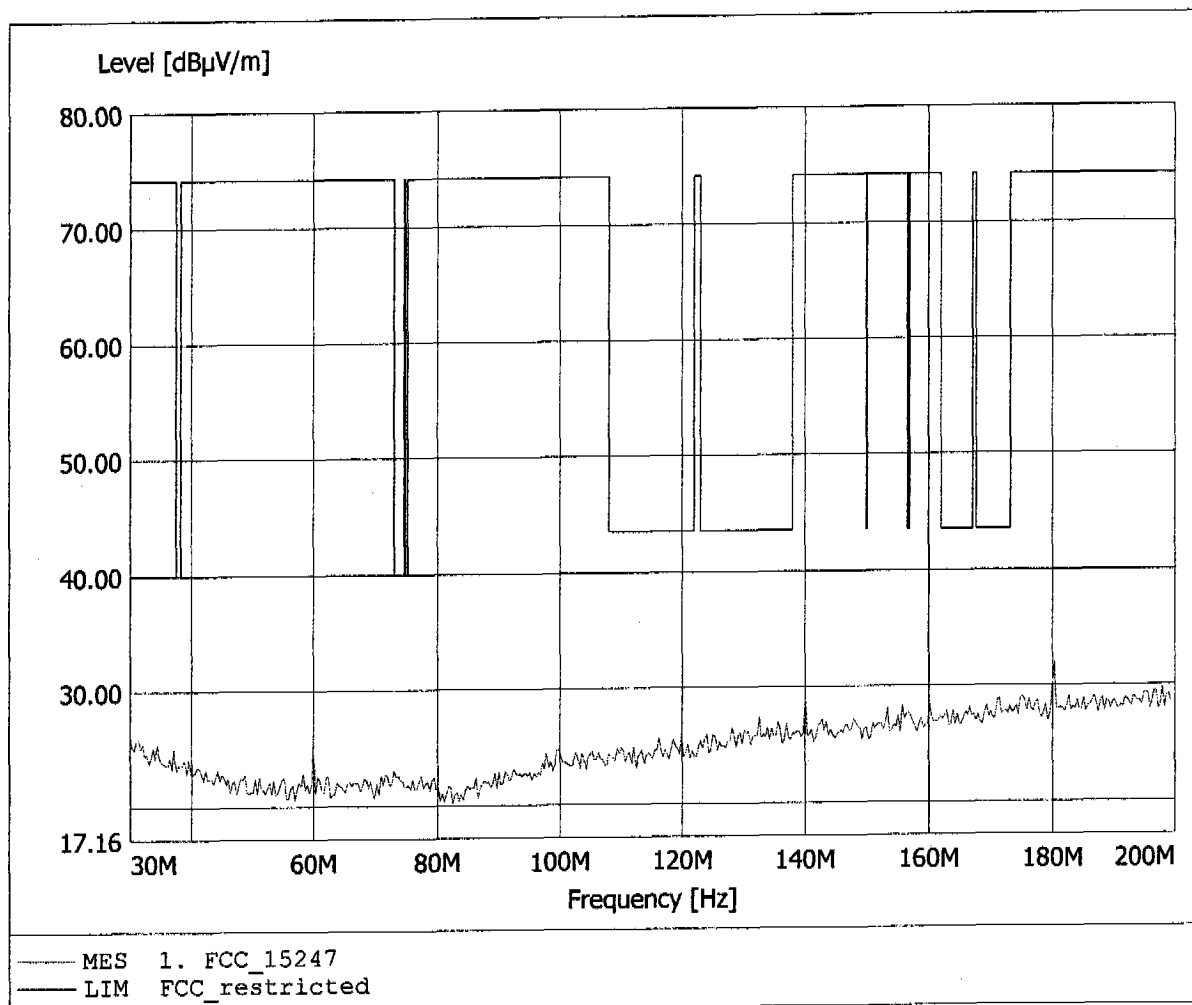


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2441 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 196.593MHz, Emax: 30.15dBµV/m, RBW: 100kHz

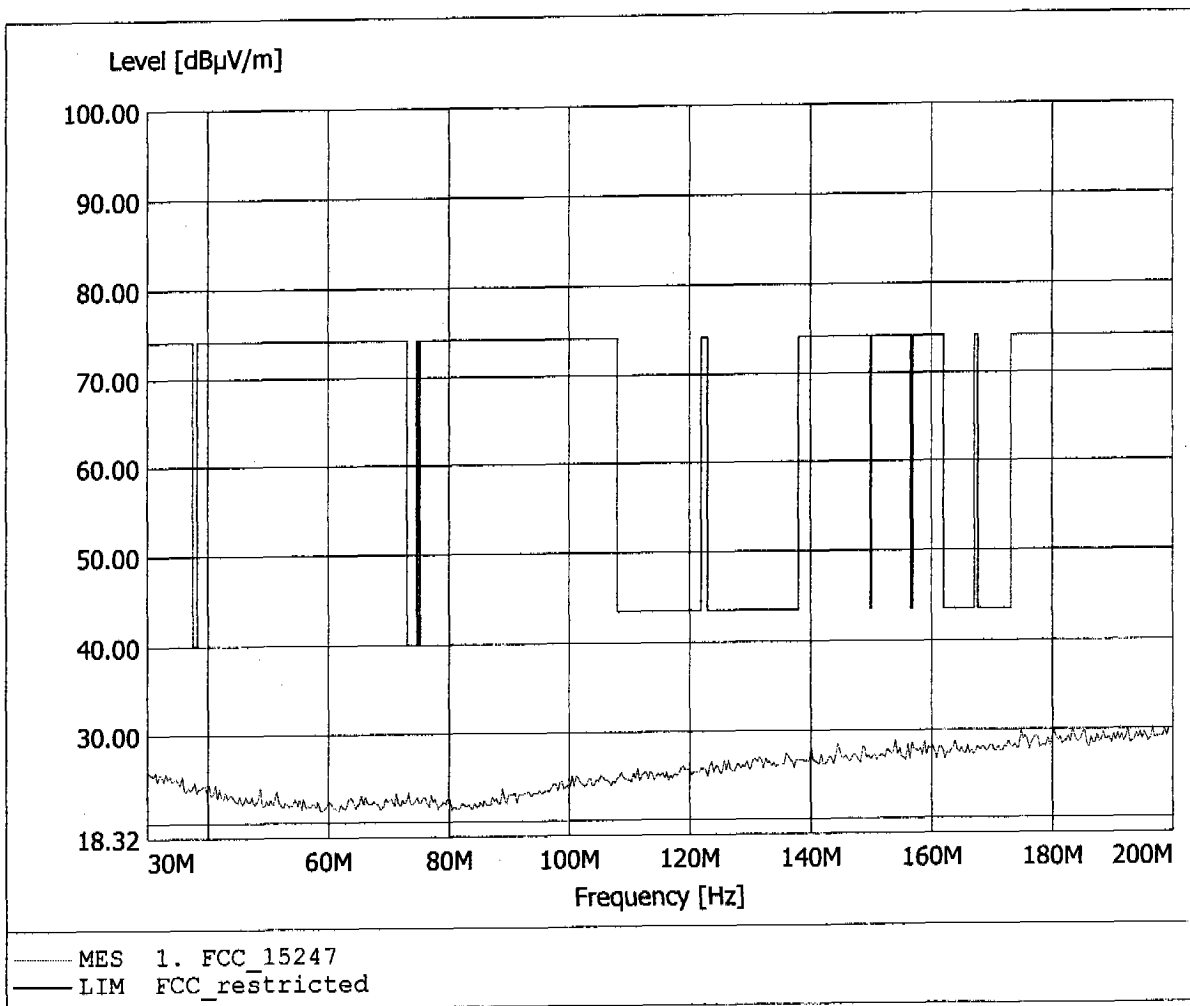


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2441 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 318.637MHz, Emax: 32.39dBµV/m, RBW: 100kHz

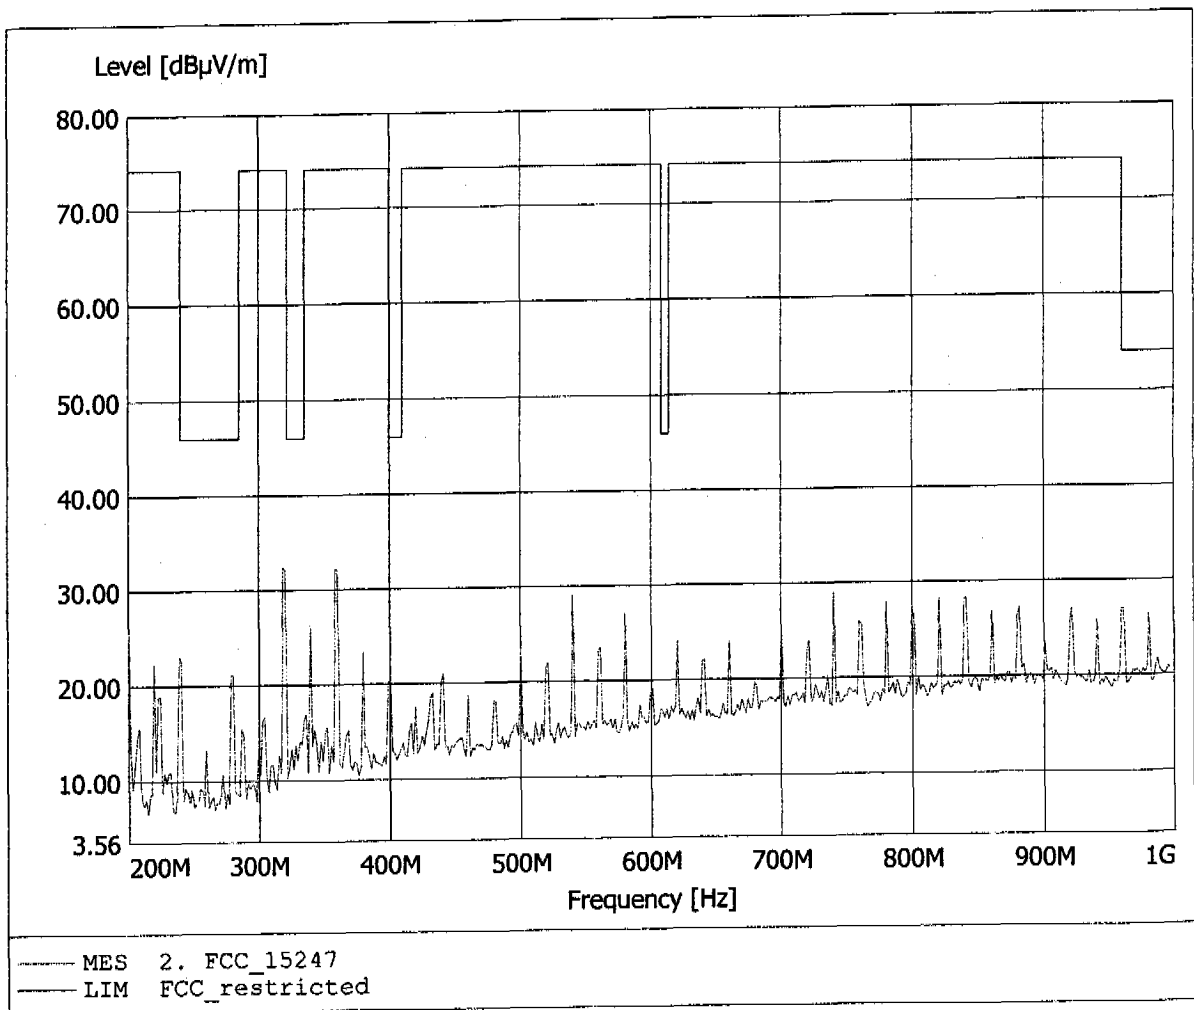


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2441 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 318.637MHz, Emax: 35.57dBµV/m, RBW: 100kHz

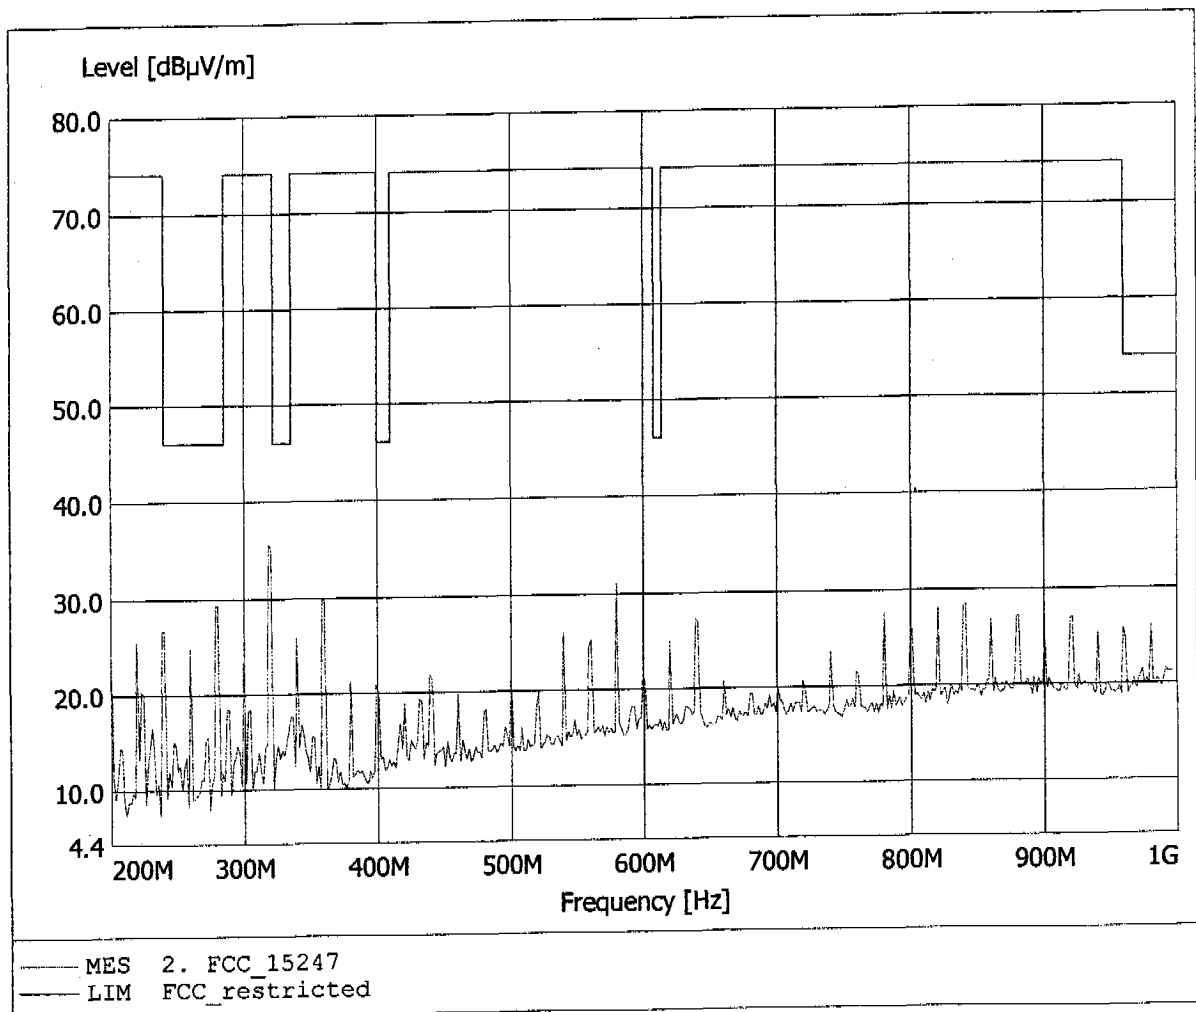


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2441 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.891GHz, Emax: 53.68dBuV/m, RBW: 1MHz

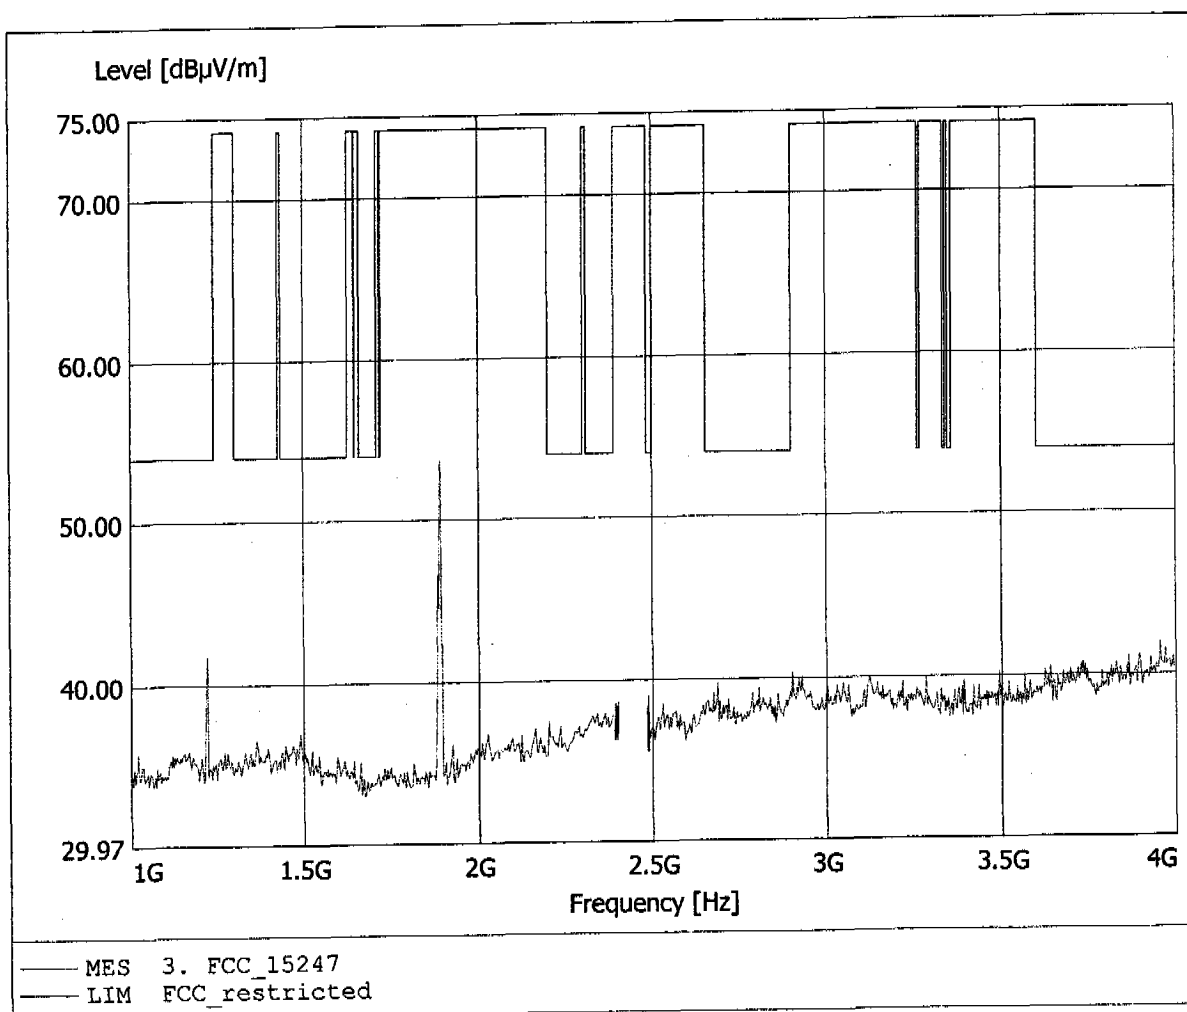


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2441 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.889GHz, Emax: 47.02dBuV/m, RBW: 1MHz

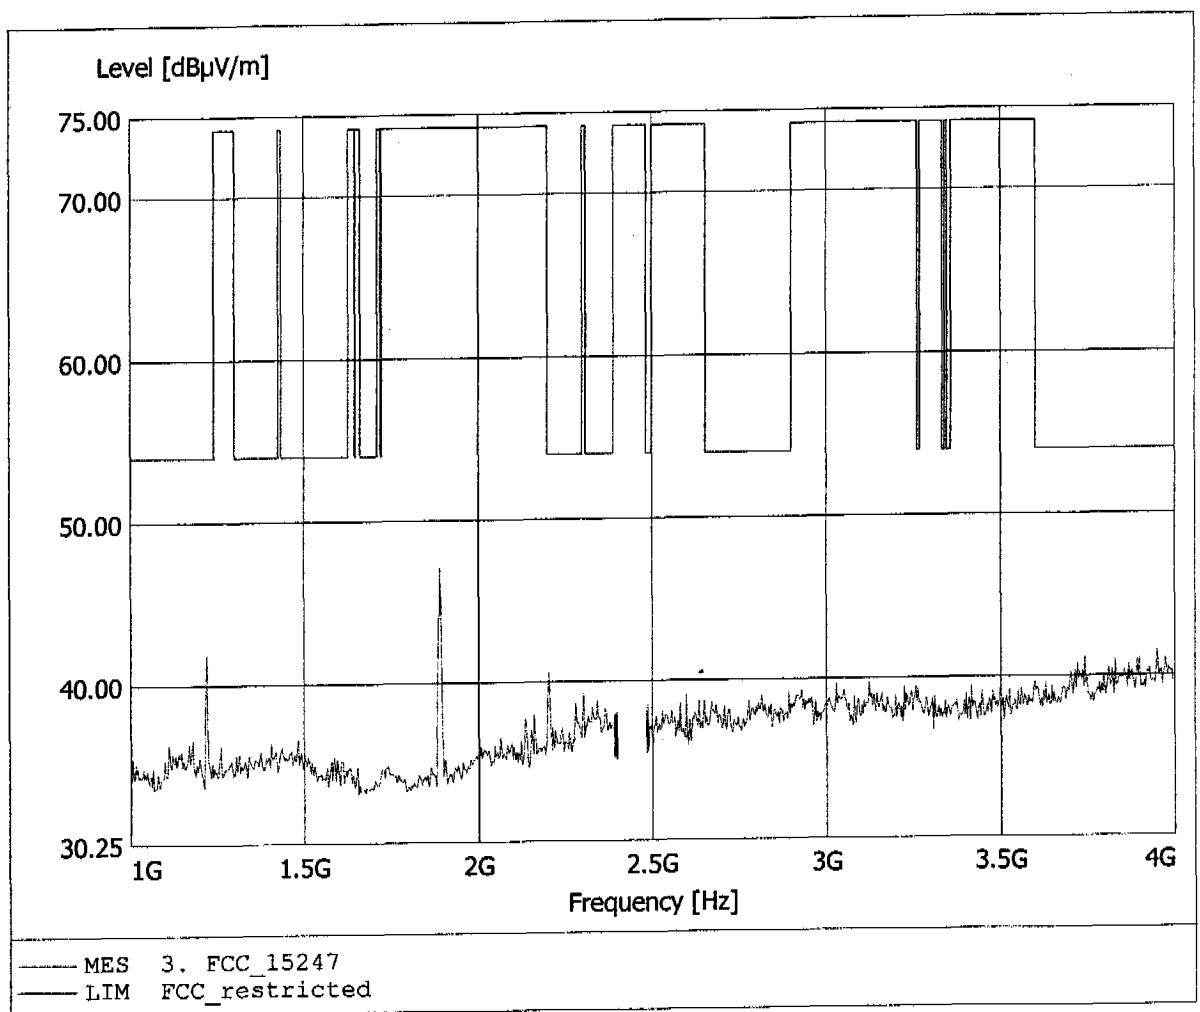


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2441 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.848GHz, Emax: 37.95dBµV/m, RBW: 1MHz

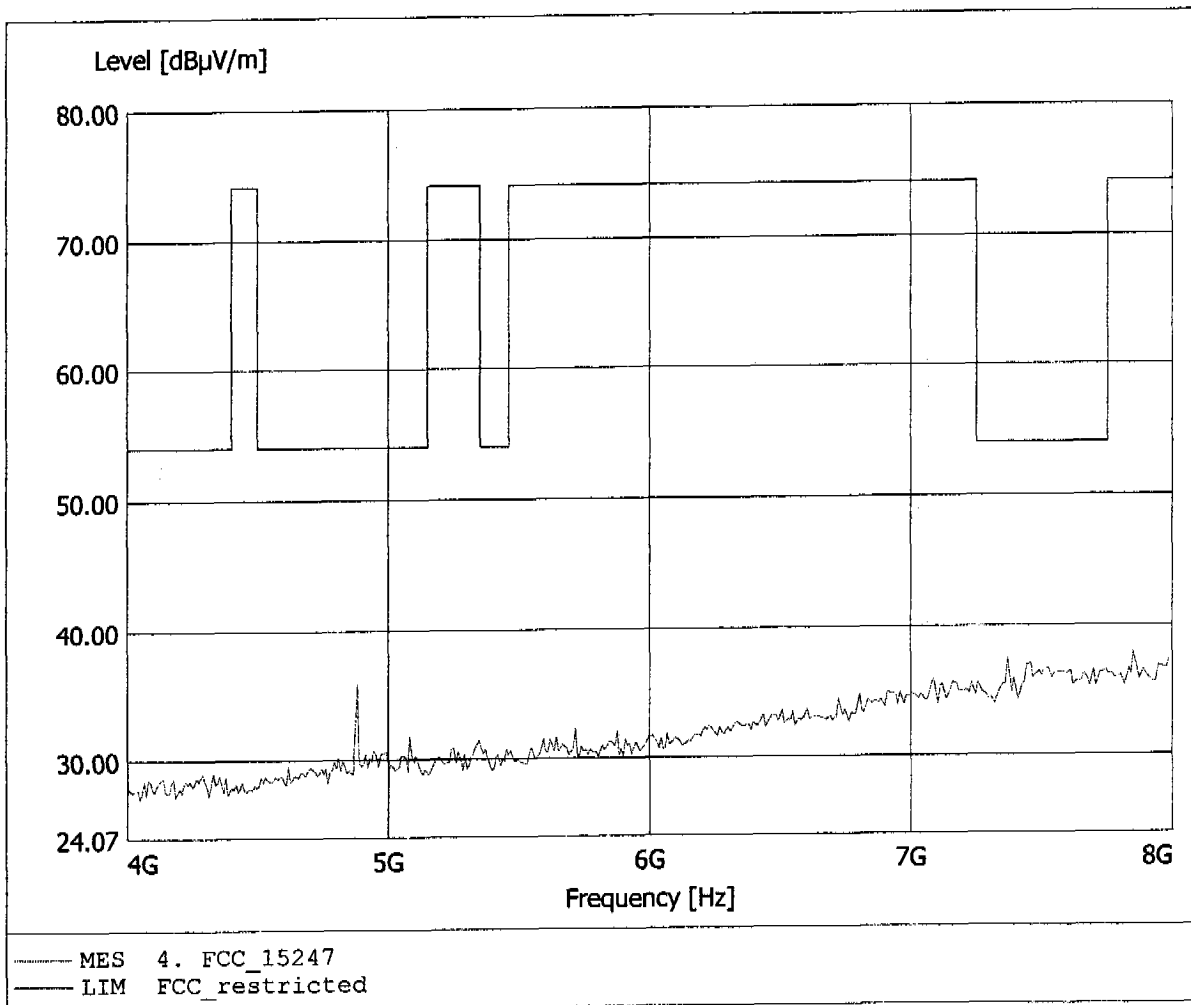


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2441 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.856GHz, Emax: 38.26dBµV/m, RBW: 1MHz

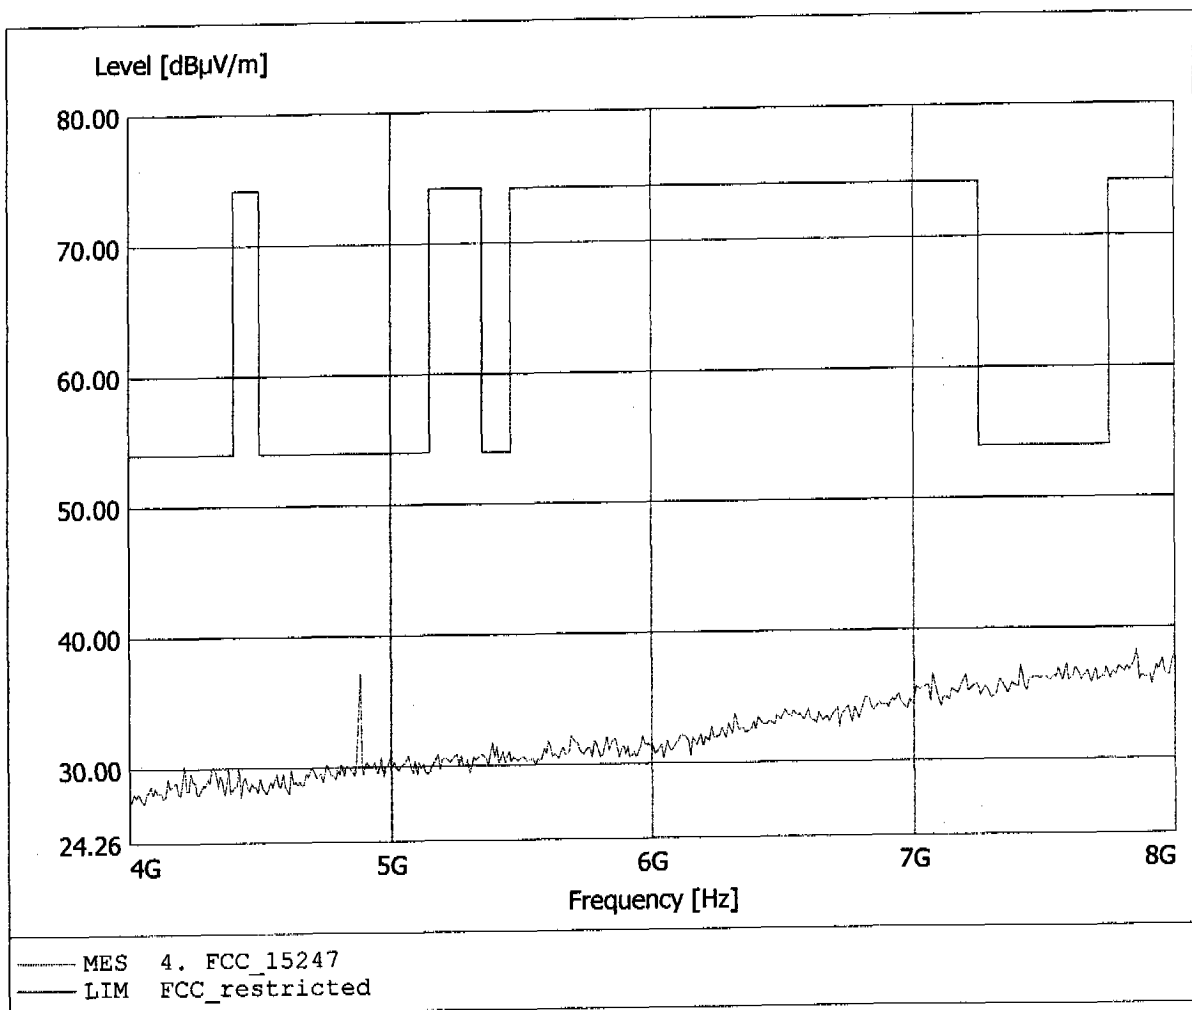


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2441 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 10.846GHz, Emax: 48.25dBµV/m, RBW: 1MHz

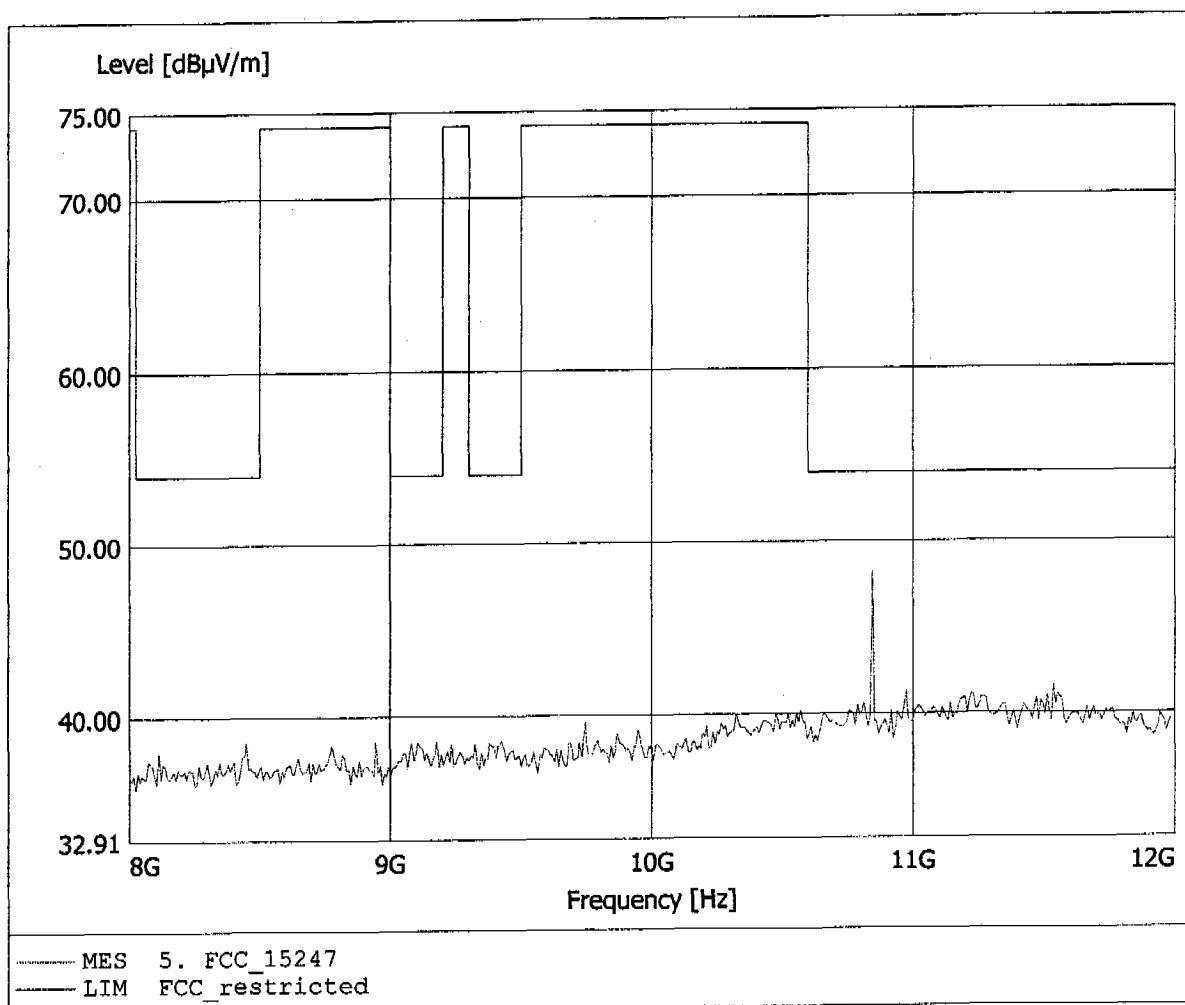


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2441 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.230GHz, Emax: 41.53dBµV/m, RBW: 1MHz

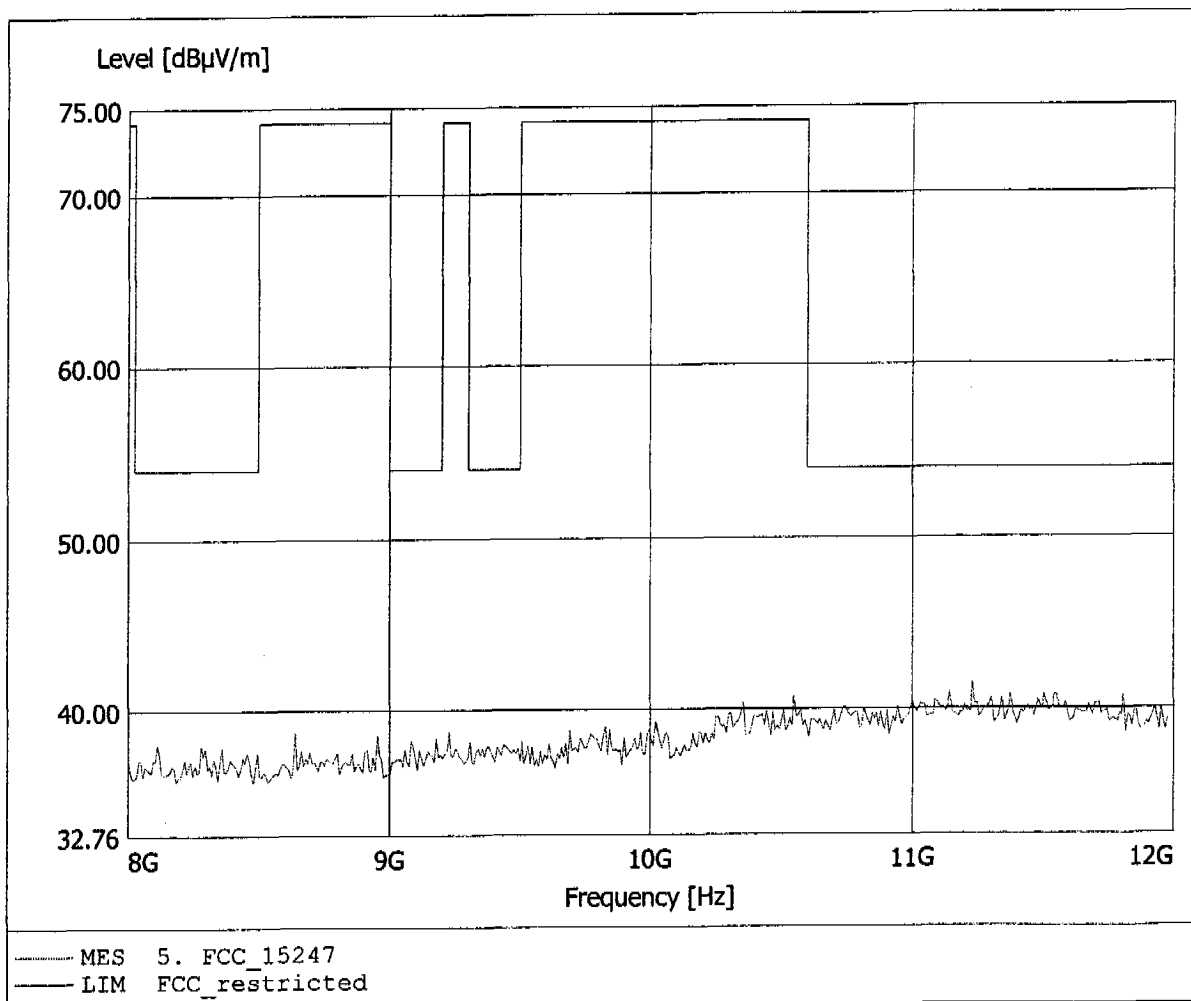


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2441 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.996GHz, Emax: 43.61dBµV/m, RBW: 1MHz

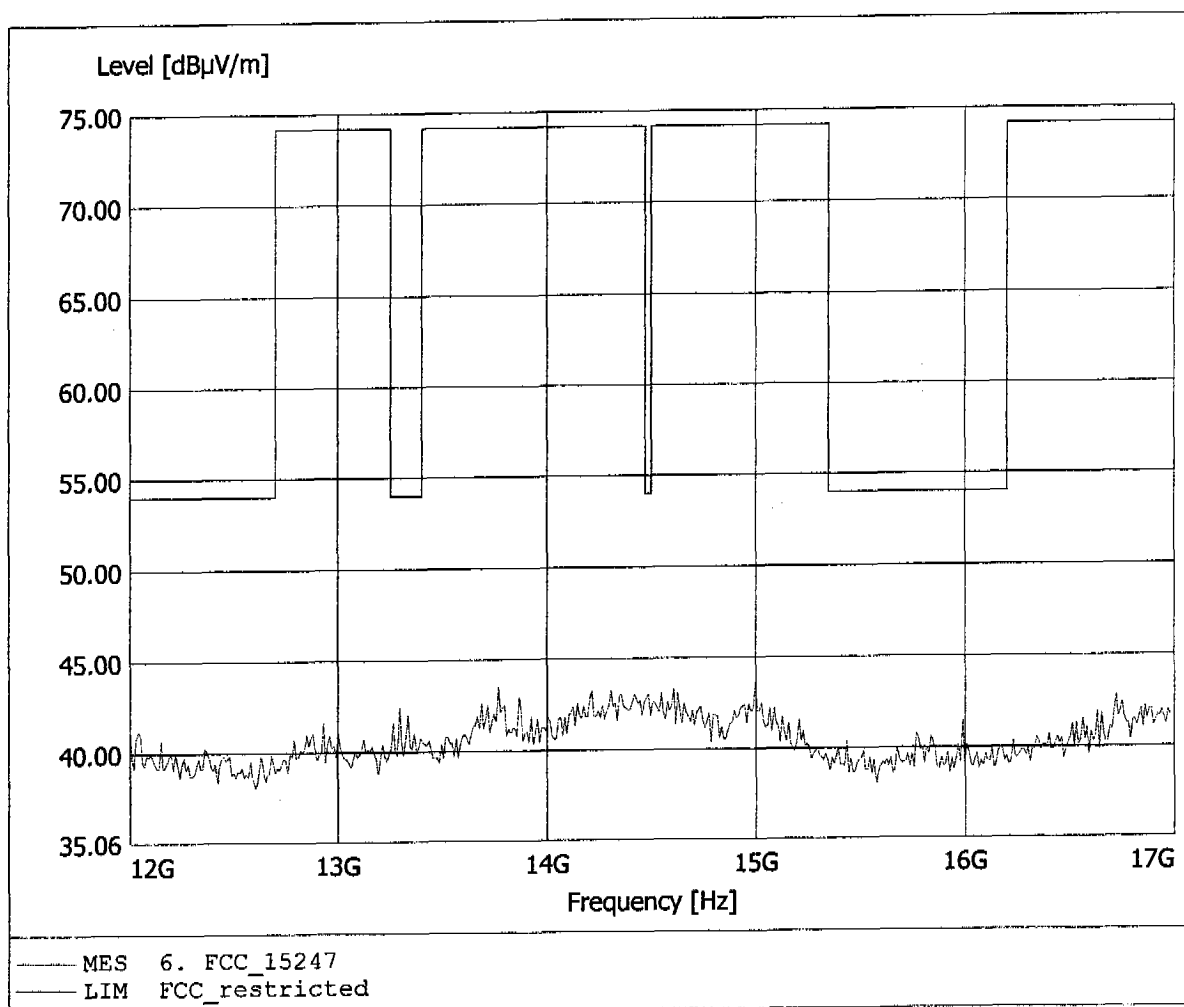


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2441 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.605GHz, Emax: 44.03dBµV/m, RBW: 1MHz

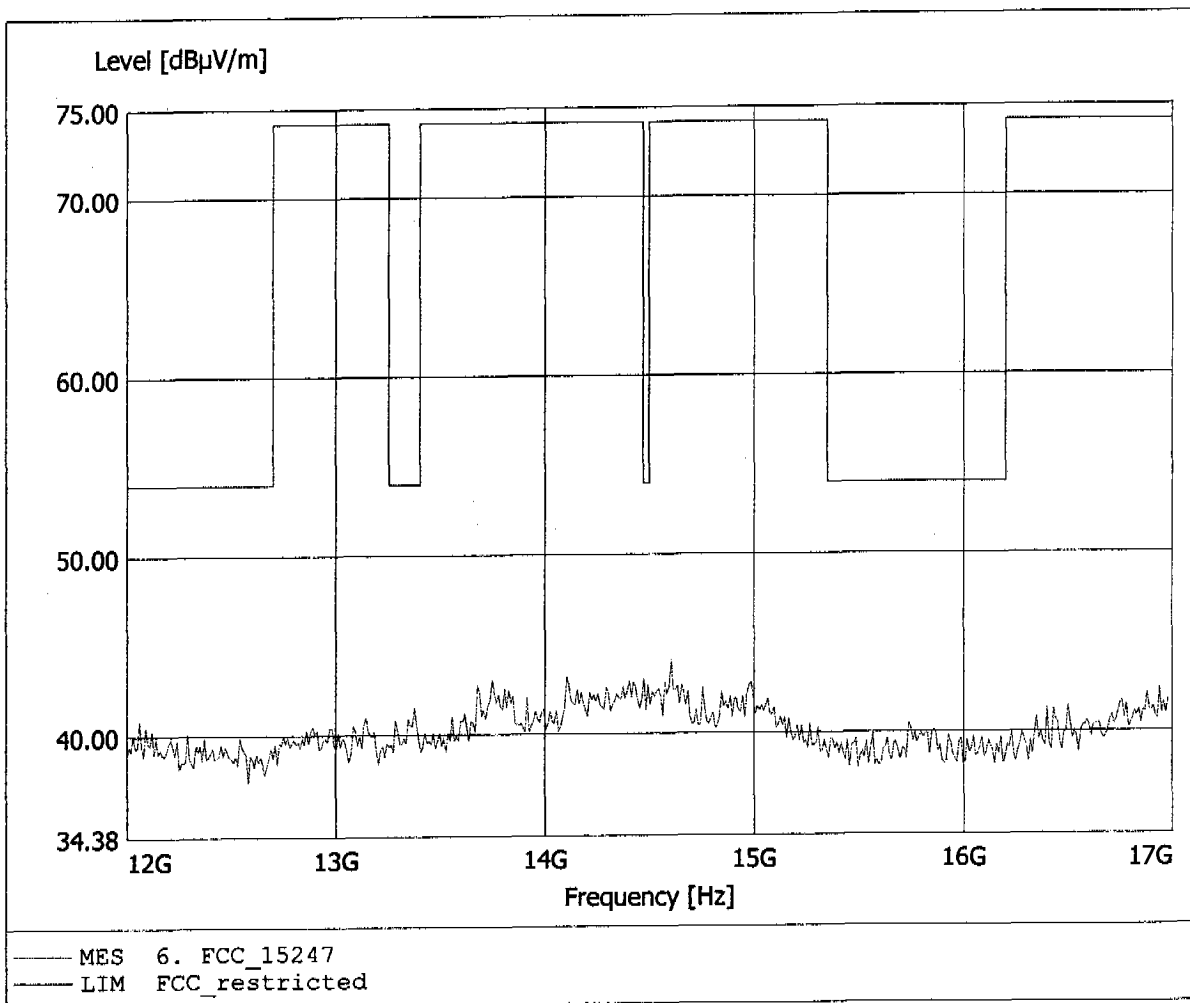


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2441 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.038GHz, Emax: 45.29dBuV/m, RBW: 1MHz

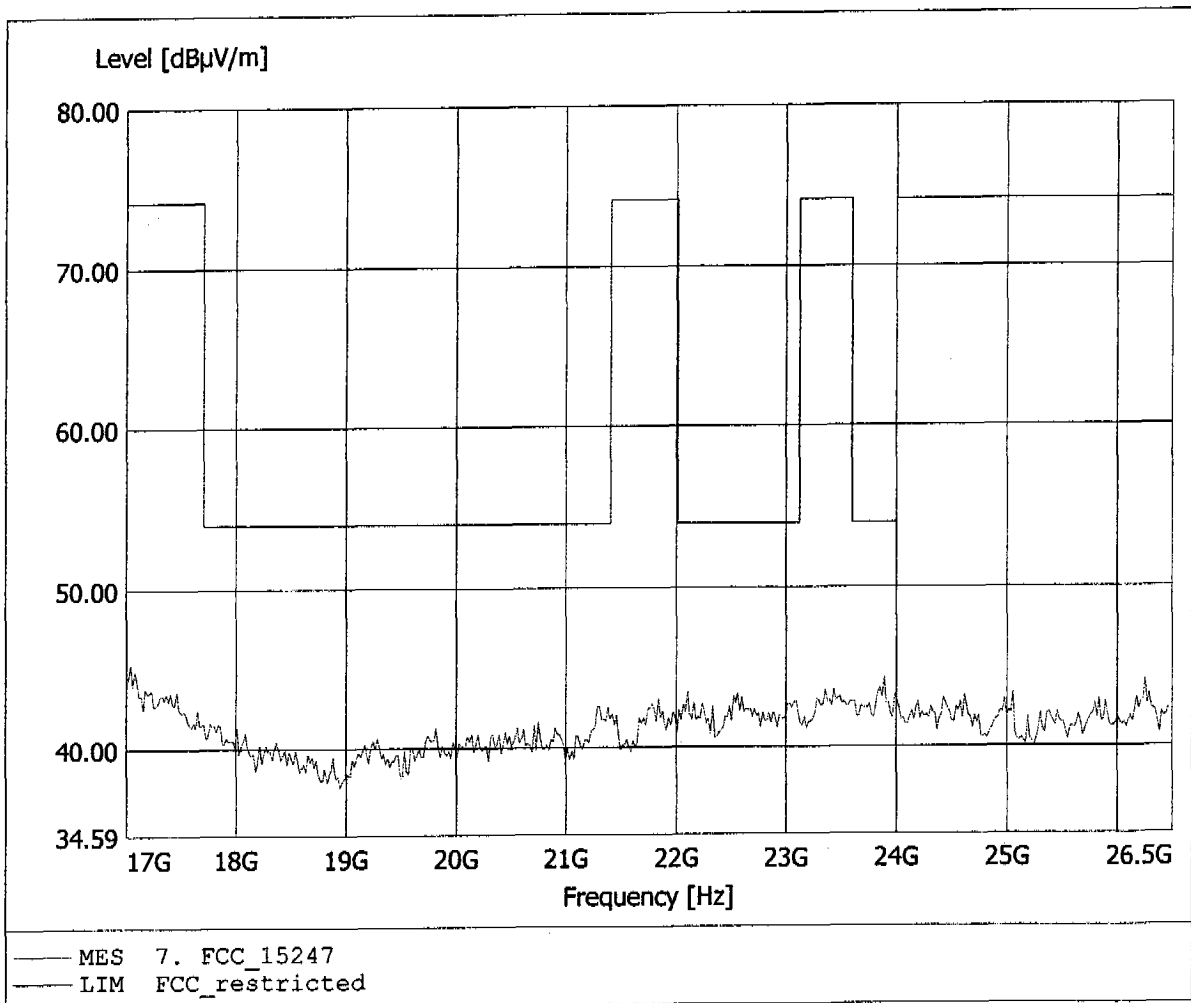


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2441 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 44.57dBµV/m, RBW: 1MHz

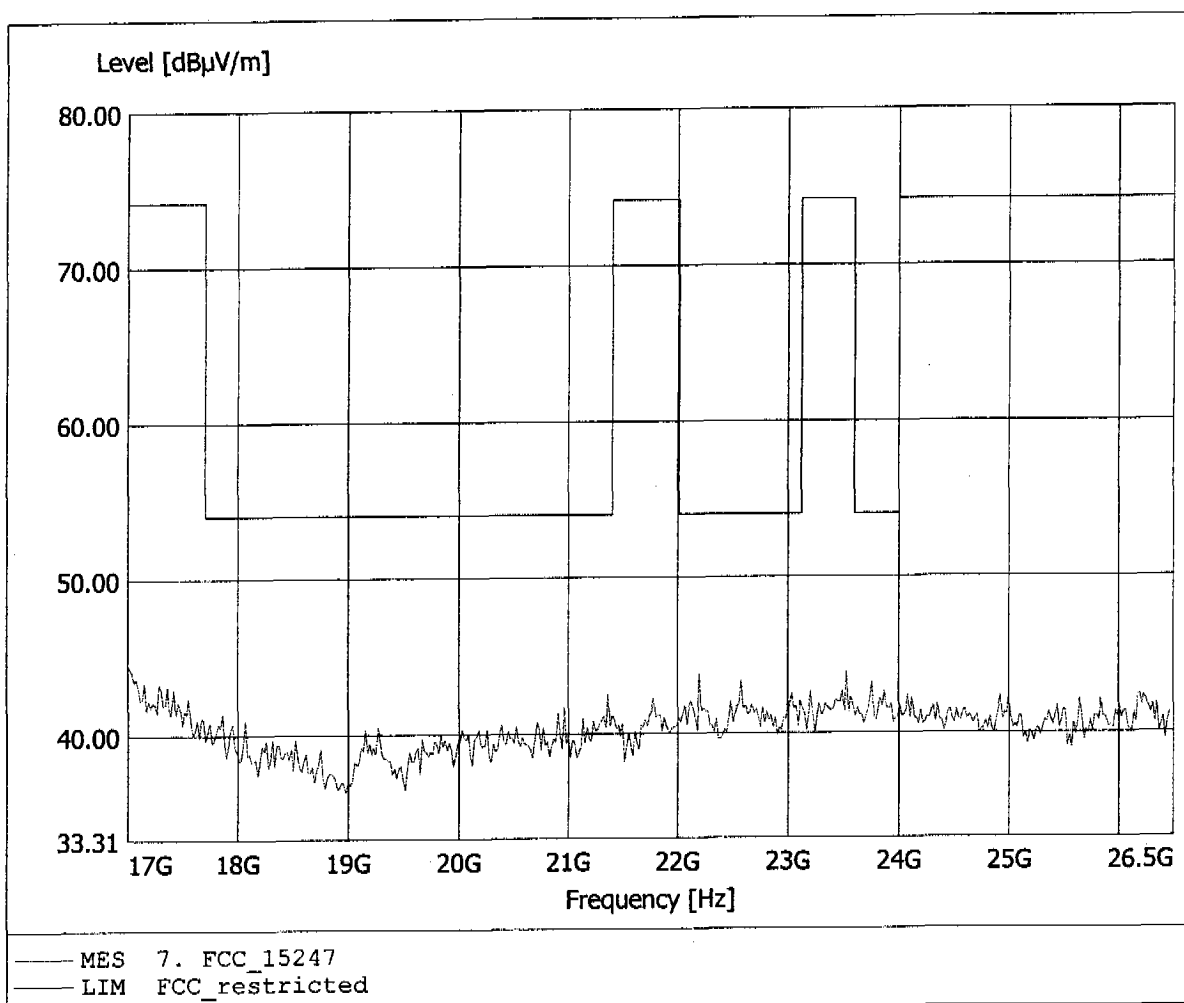


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2480 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 180.240MHz, Emax: 32.04dBµV/m, RBW: 100kHz

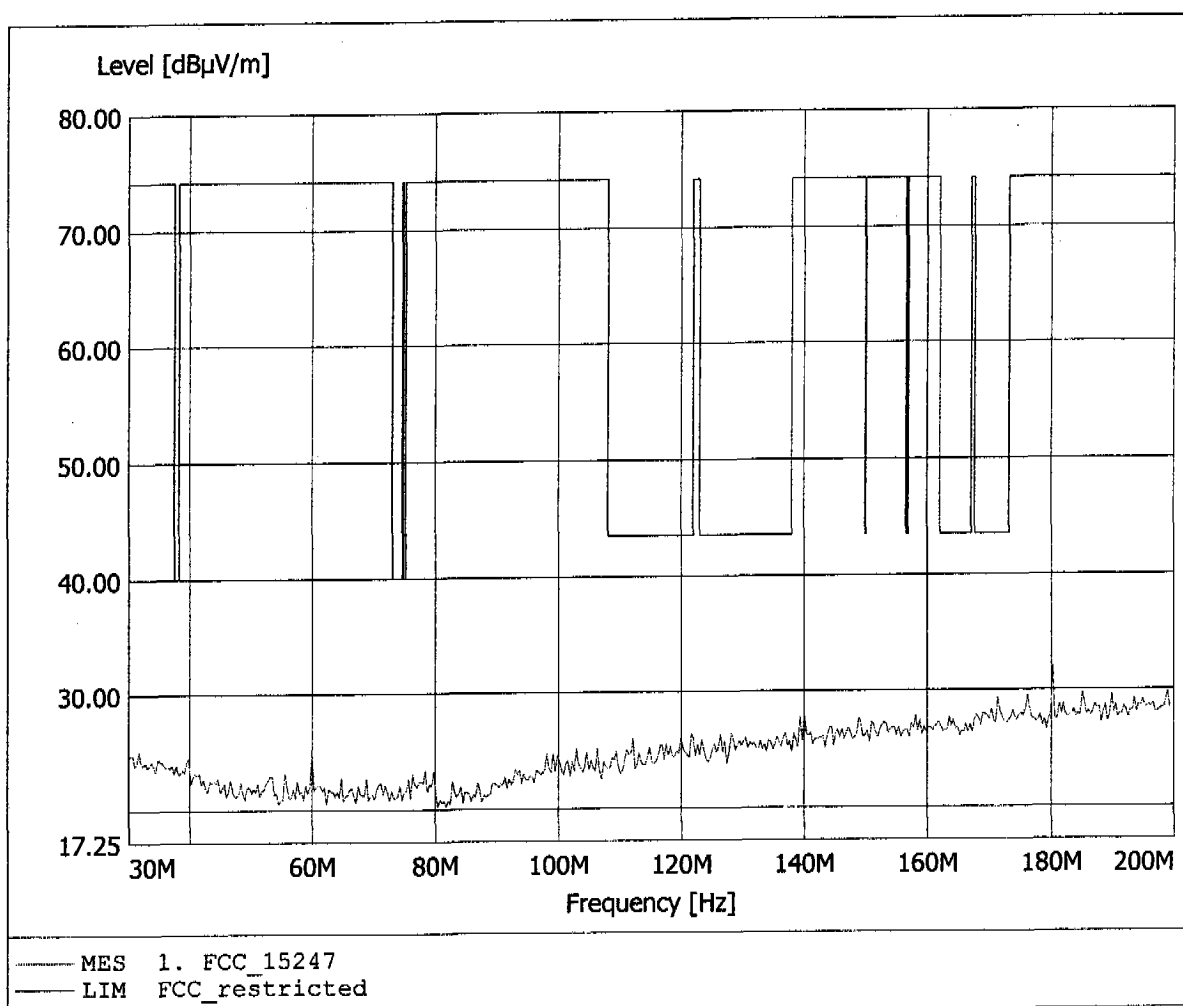


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2480 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 160.140MHz, Emax: 32.73dBµV/m, RBW: 100kHz

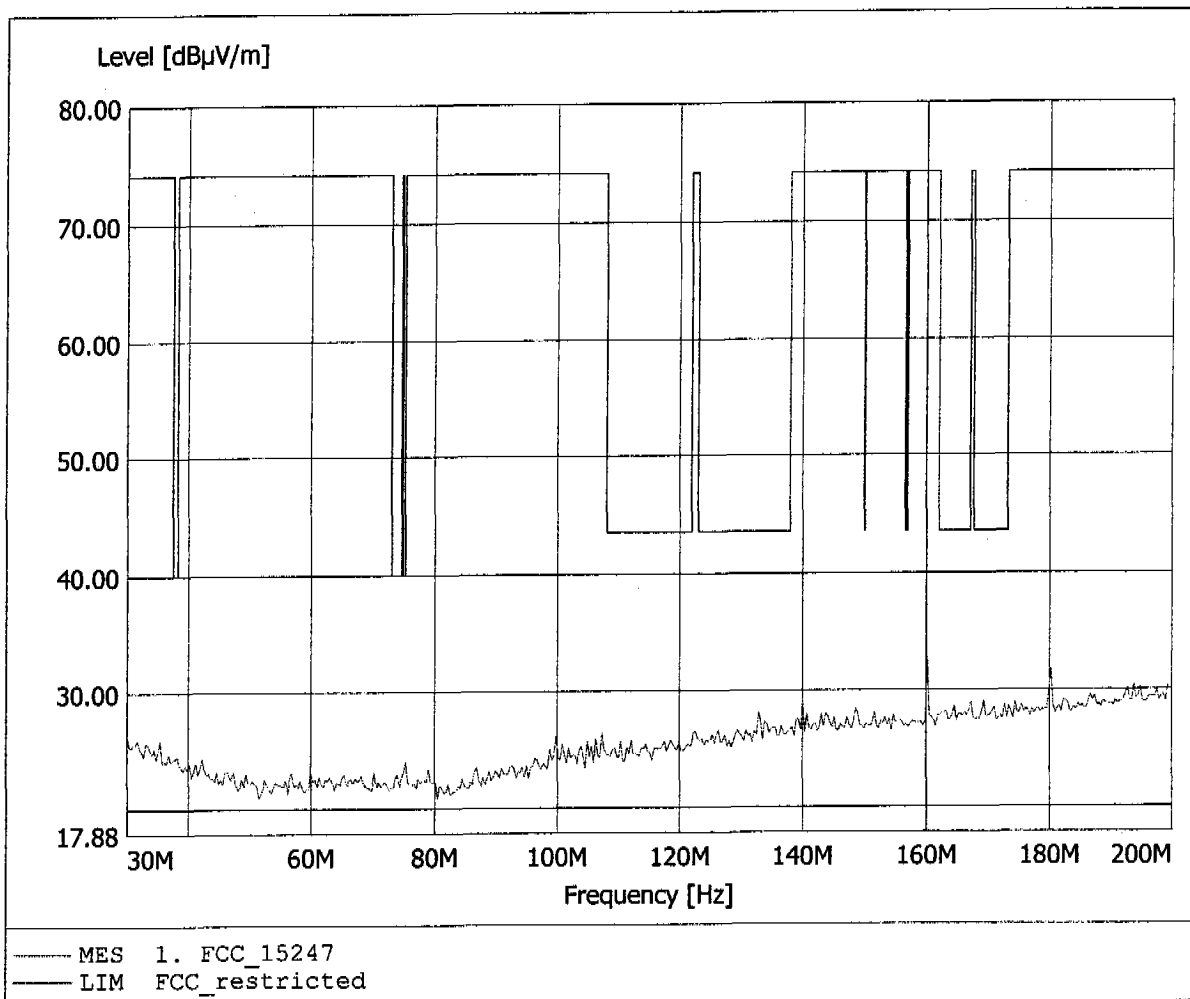


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2480 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 318.637MHz, Emax: 32.76dBuV/m, RBW: 100kHz

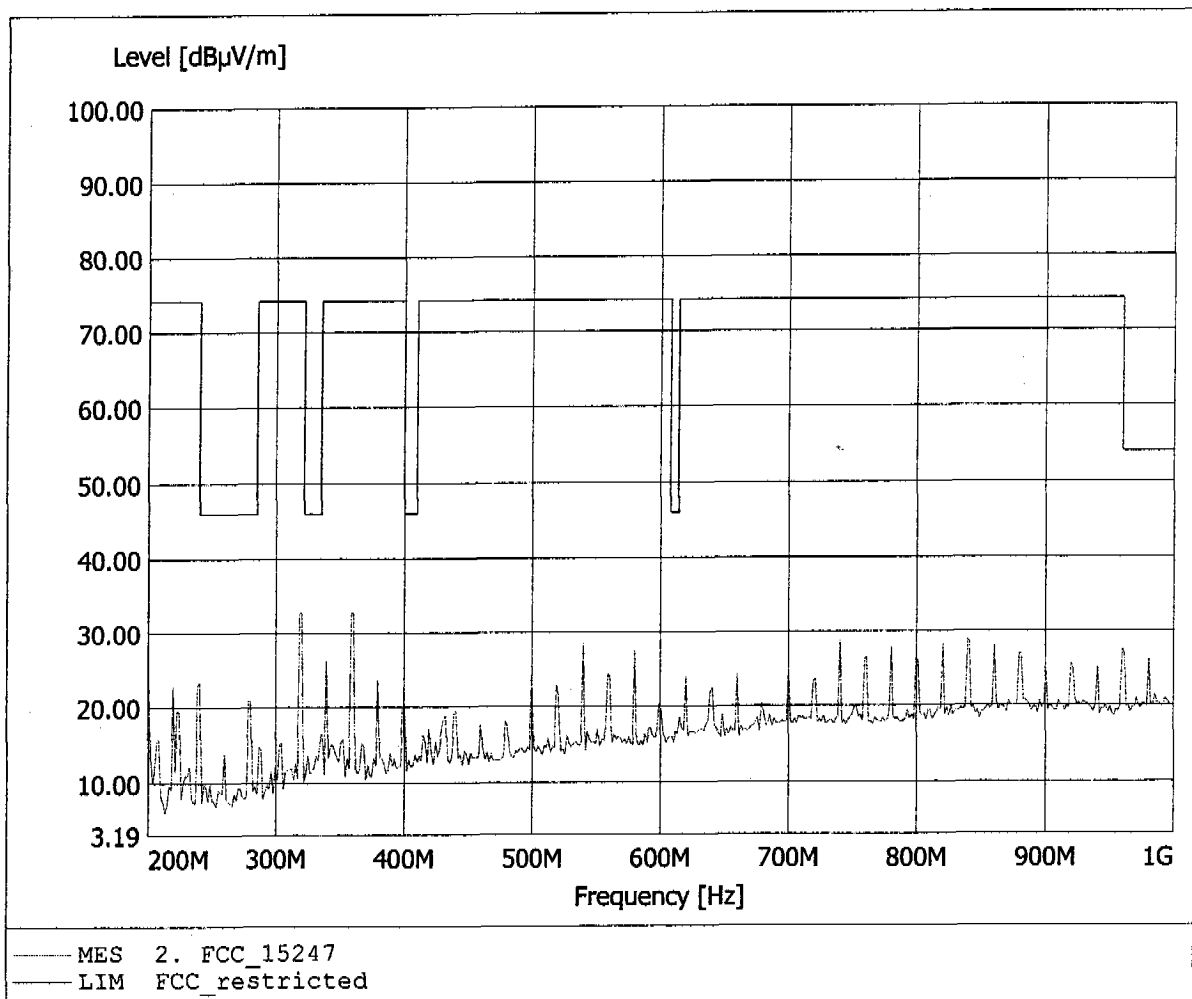


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2480 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 318.637MHz, Emax: 35.49dBµV/m, RBW: 100kHz

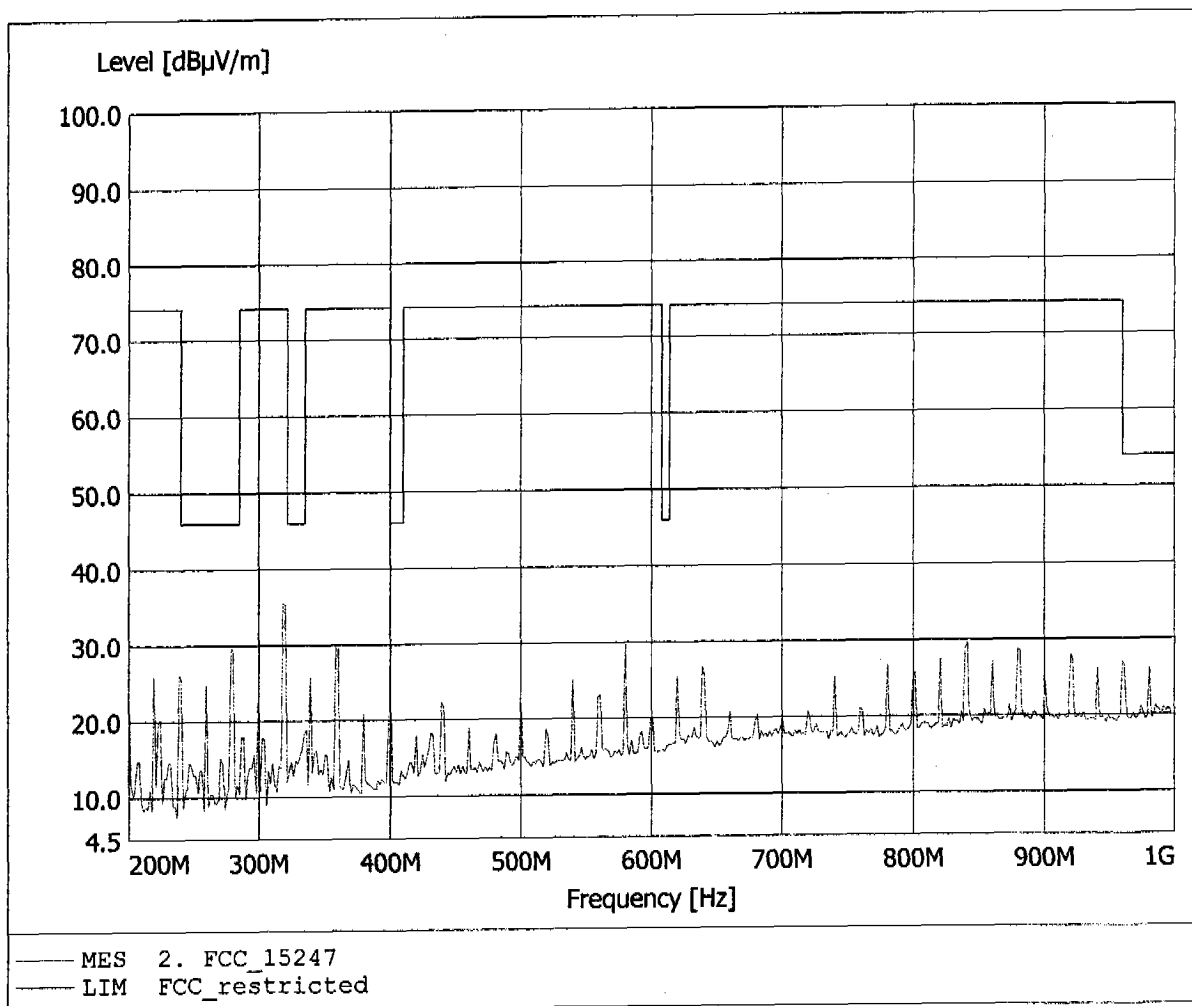


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2480 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 64.69dBµV/m, RBW: 1MHz

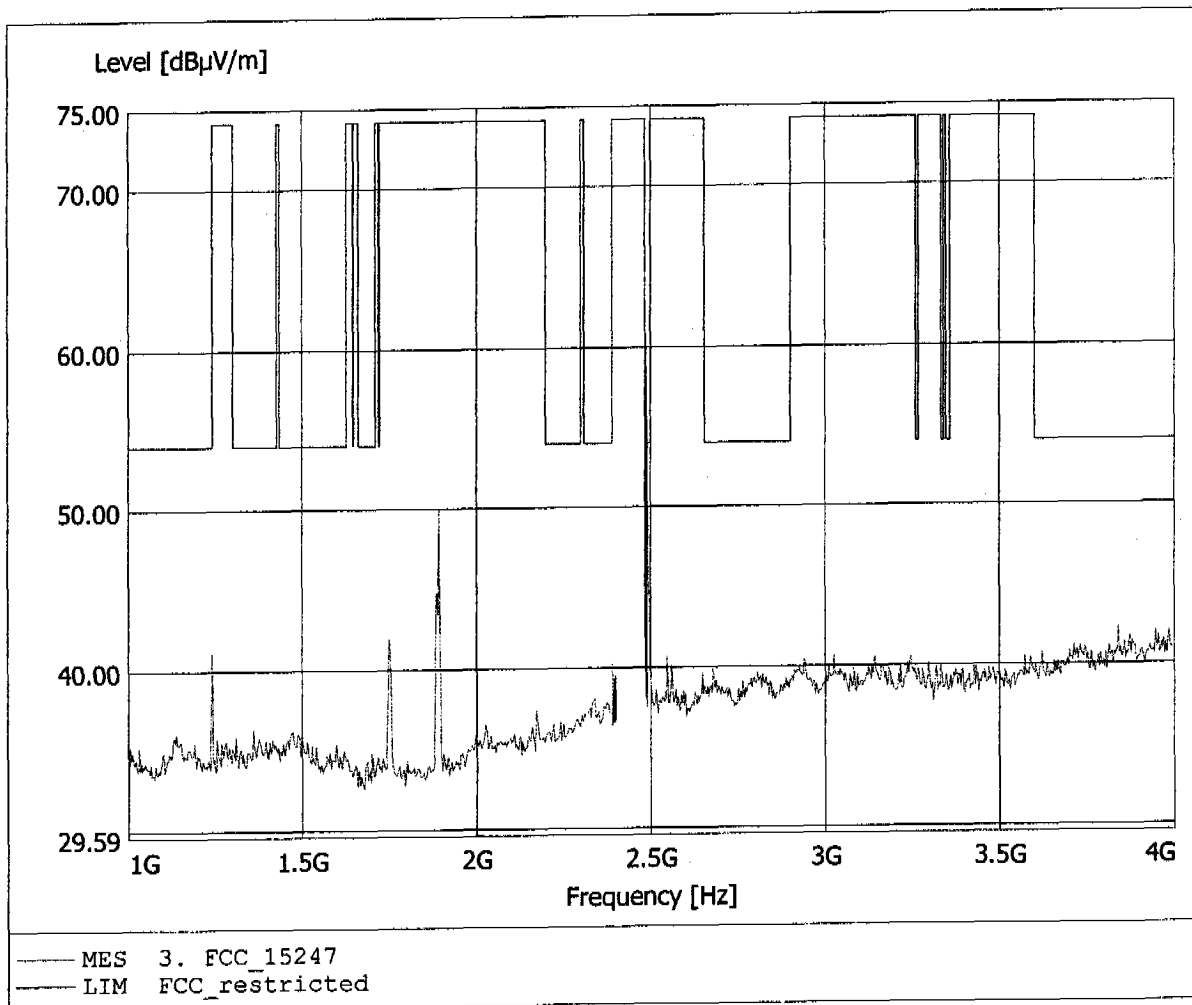


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2480 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 64.69dBuV/m, RBW: 1MHz

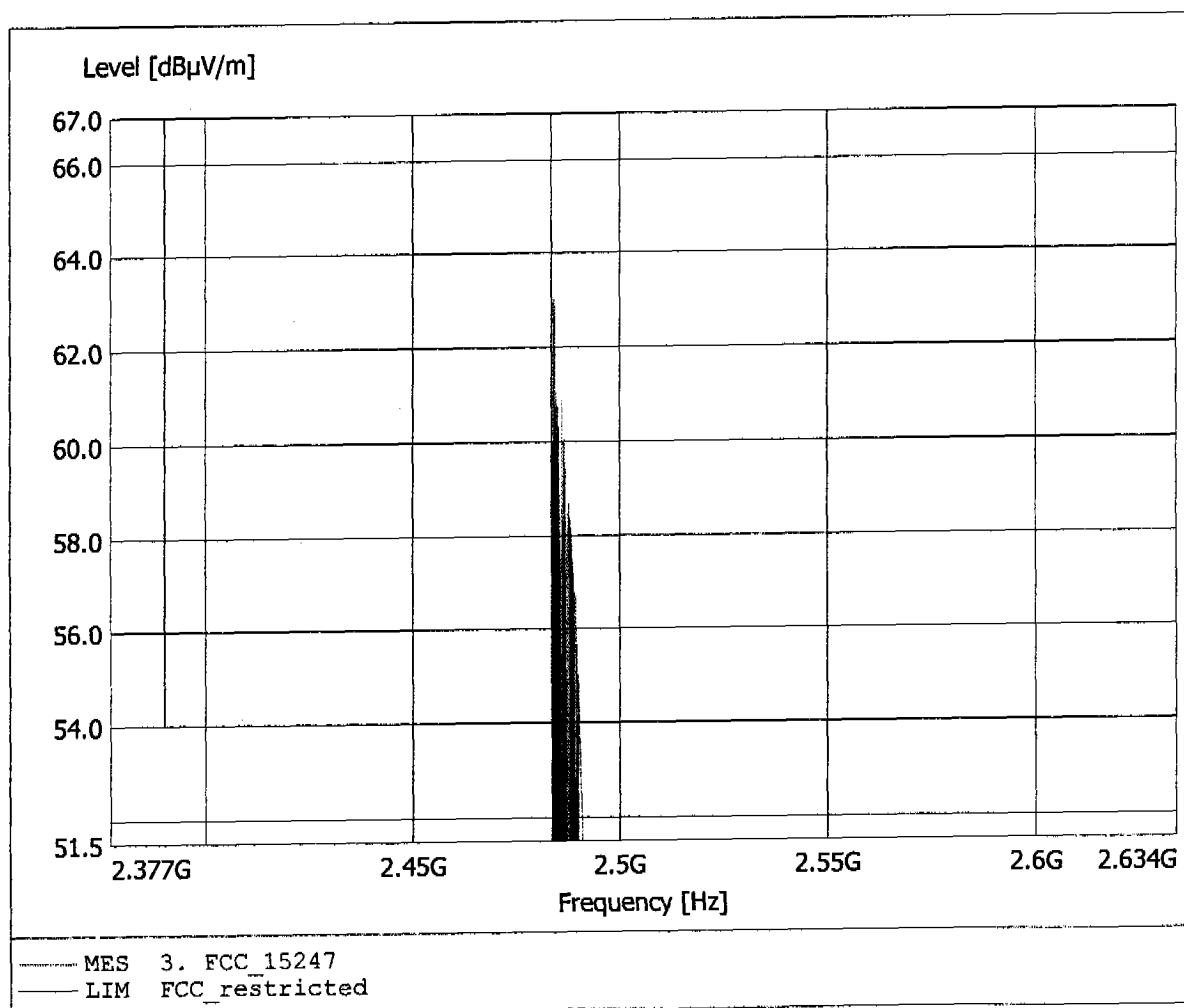


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2480 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.891GHz, Emax: 45.46dBuV/m, RBW: 1MHz

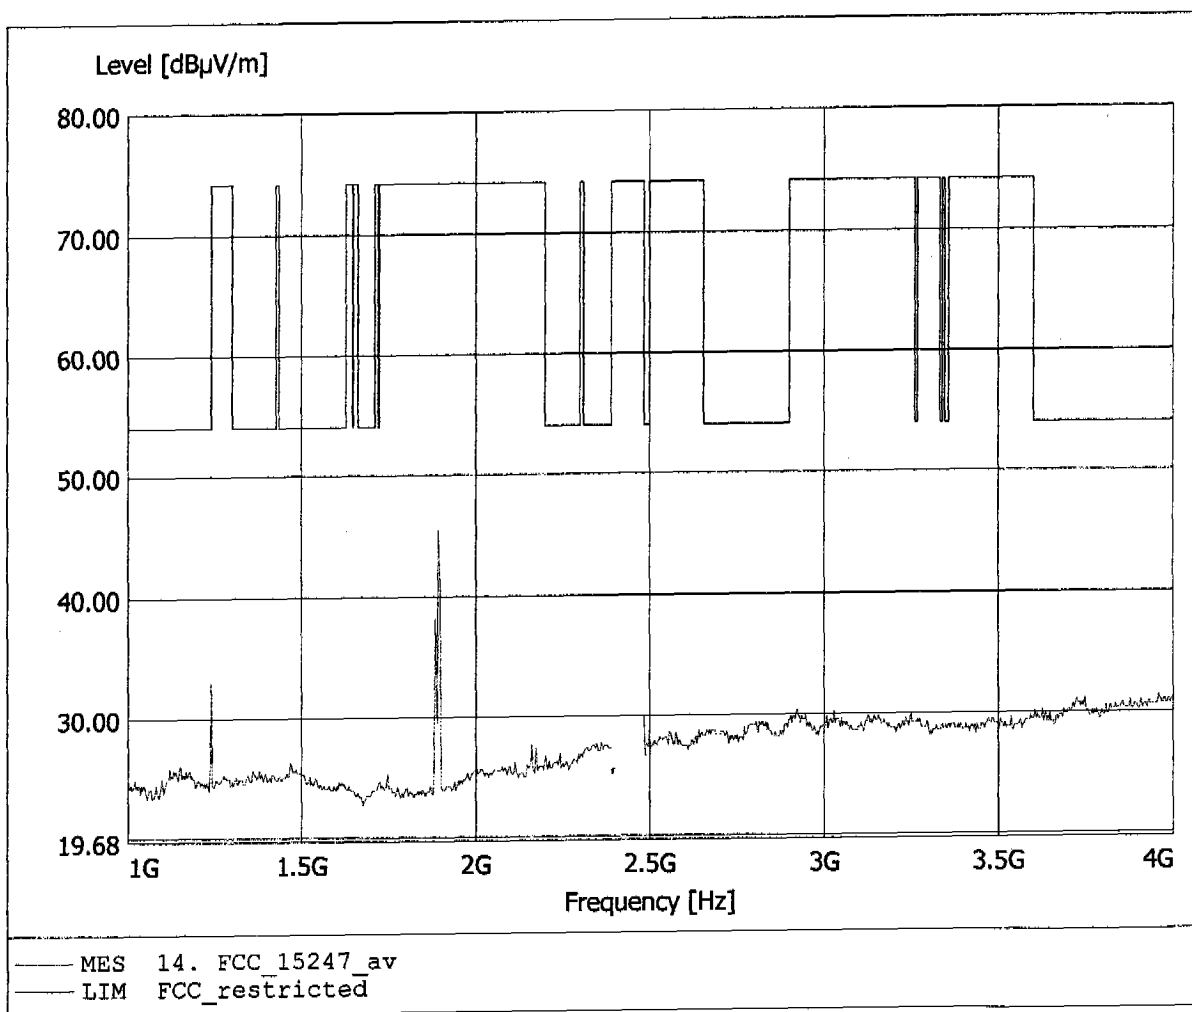


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2480 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 67.25dBuV/m, RBW: 1MHz

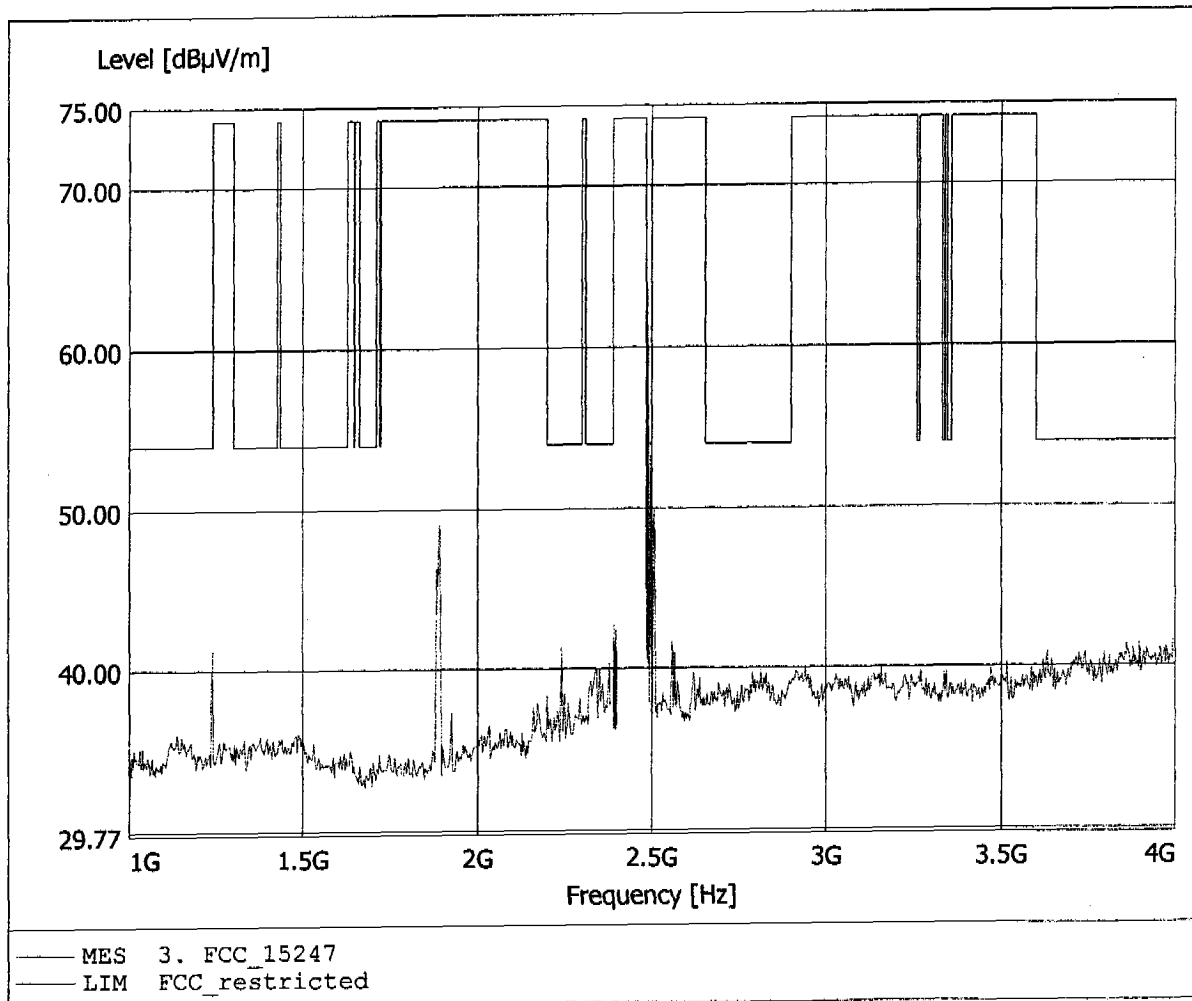


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2480 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 67.25dB μ V/m, RBW: 1MHz

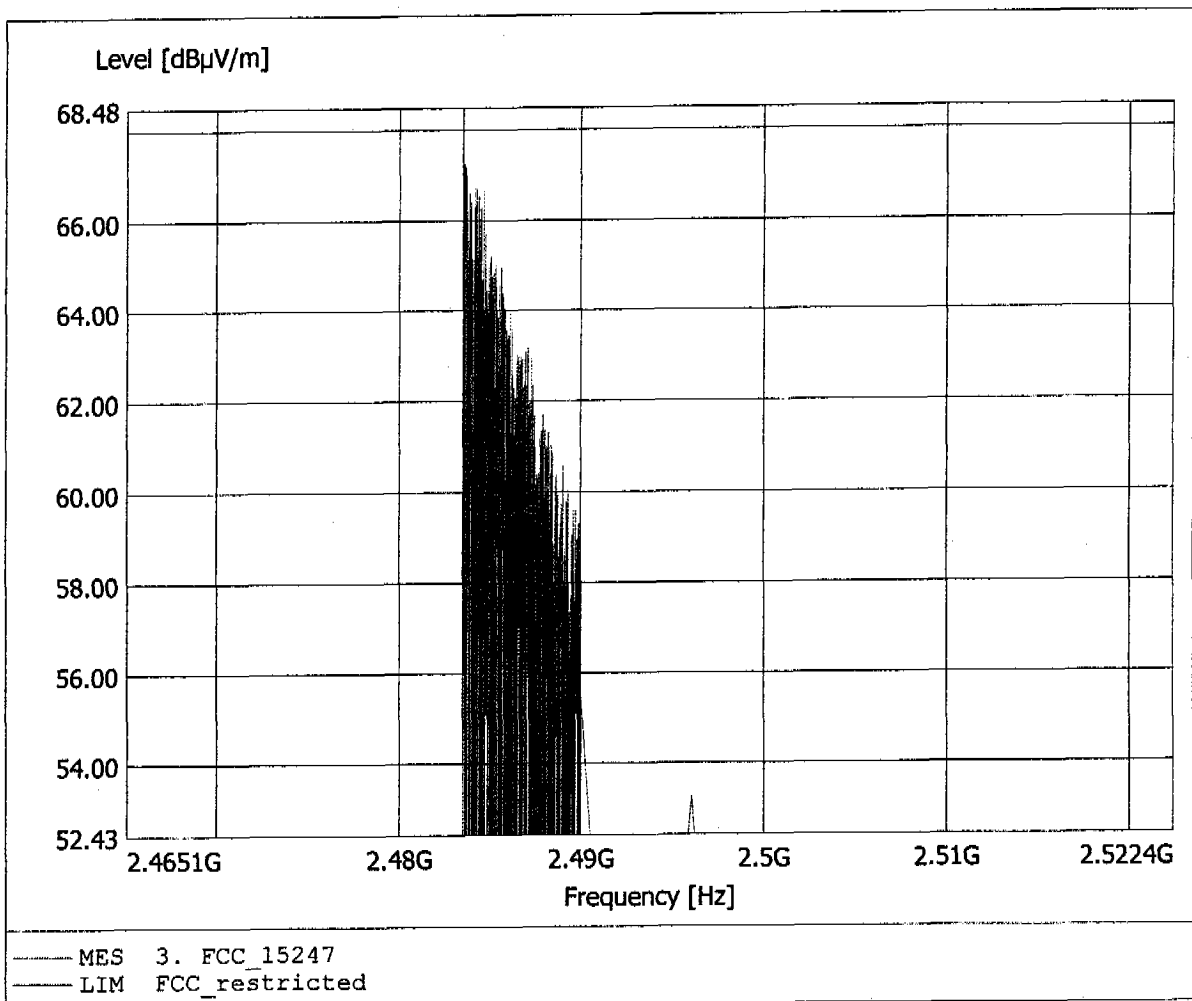


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2480 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.891GHz, Emax: 45.24dBµV/m, RBW: 1MHz

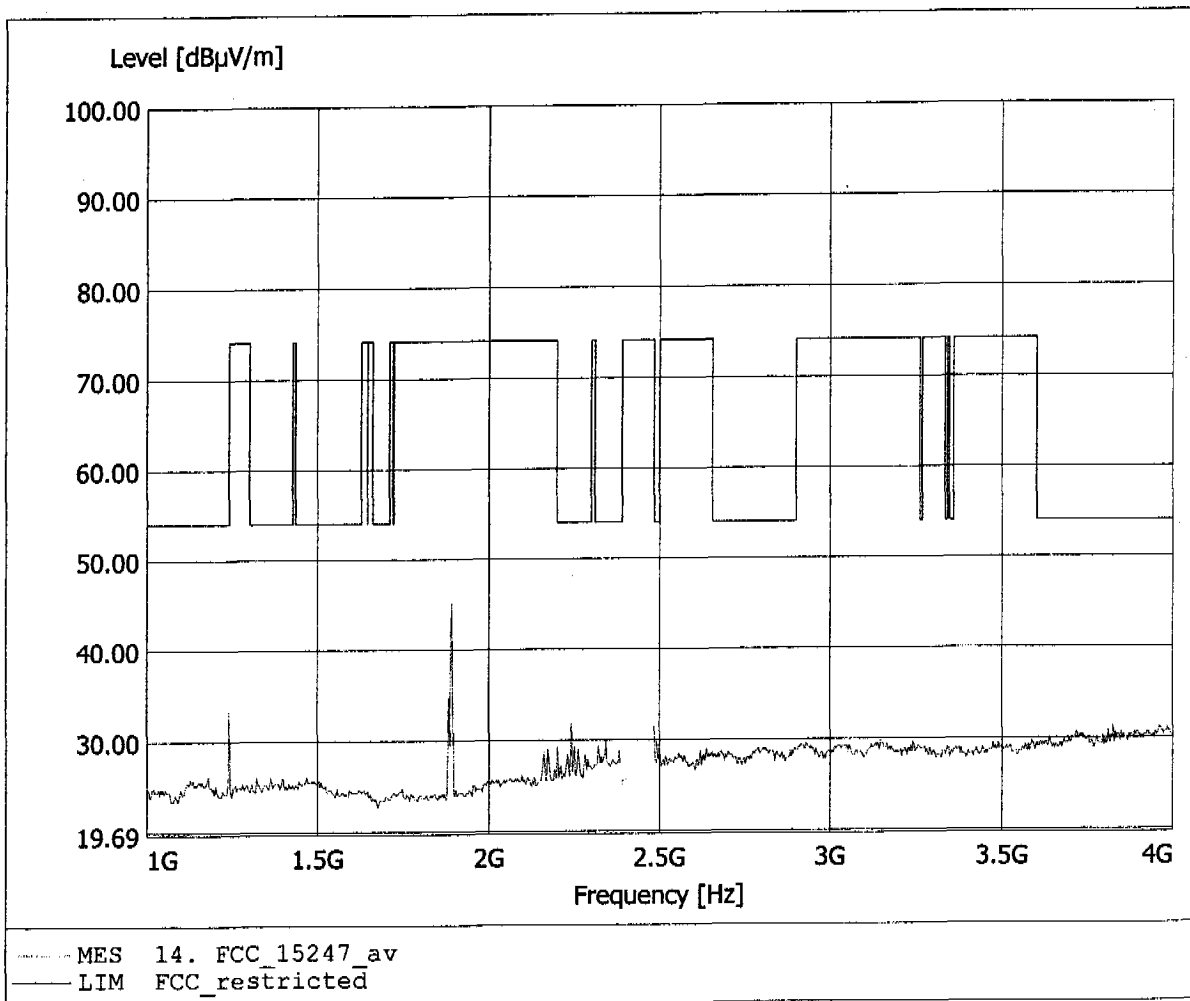


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2480 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.792GHz, Emax: 37.78dBuV/m, RBW: 1MHz

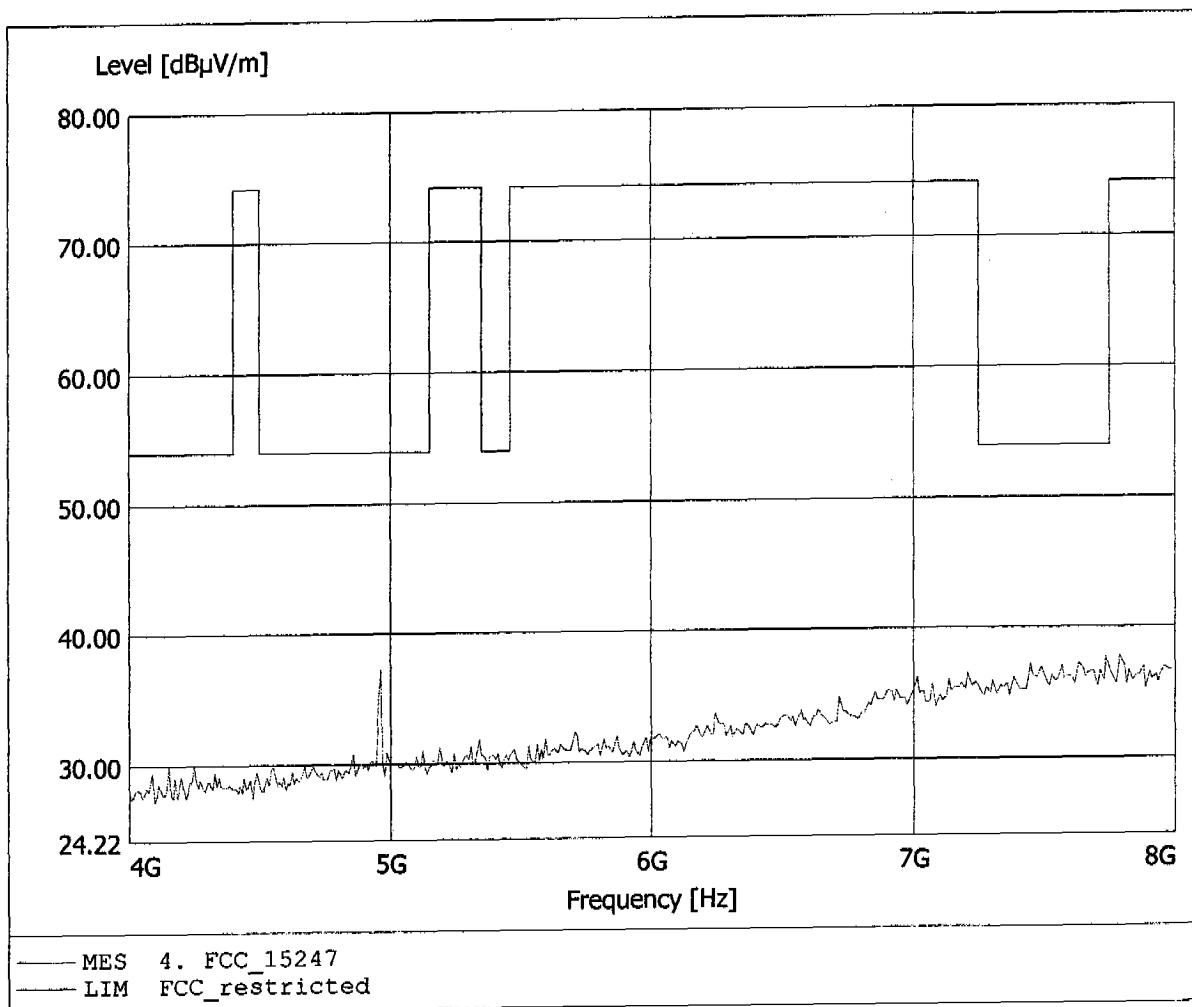


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2480 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.984GHz, Emax: 37.06dBµV/m, RBW: 1MHz

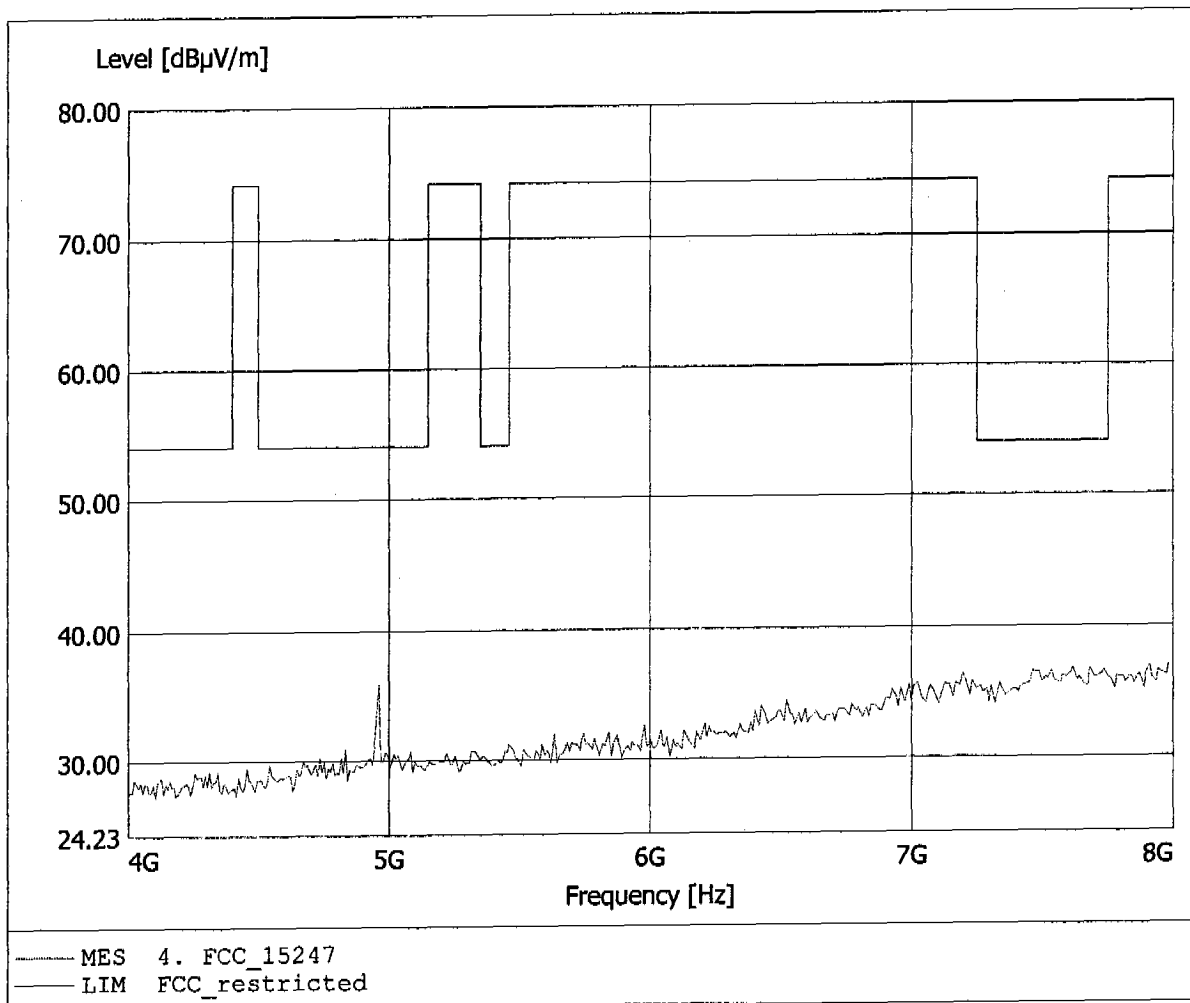


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2480 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.038GHz, Emax: 41.26dBuV/m, RBW: 1MHz

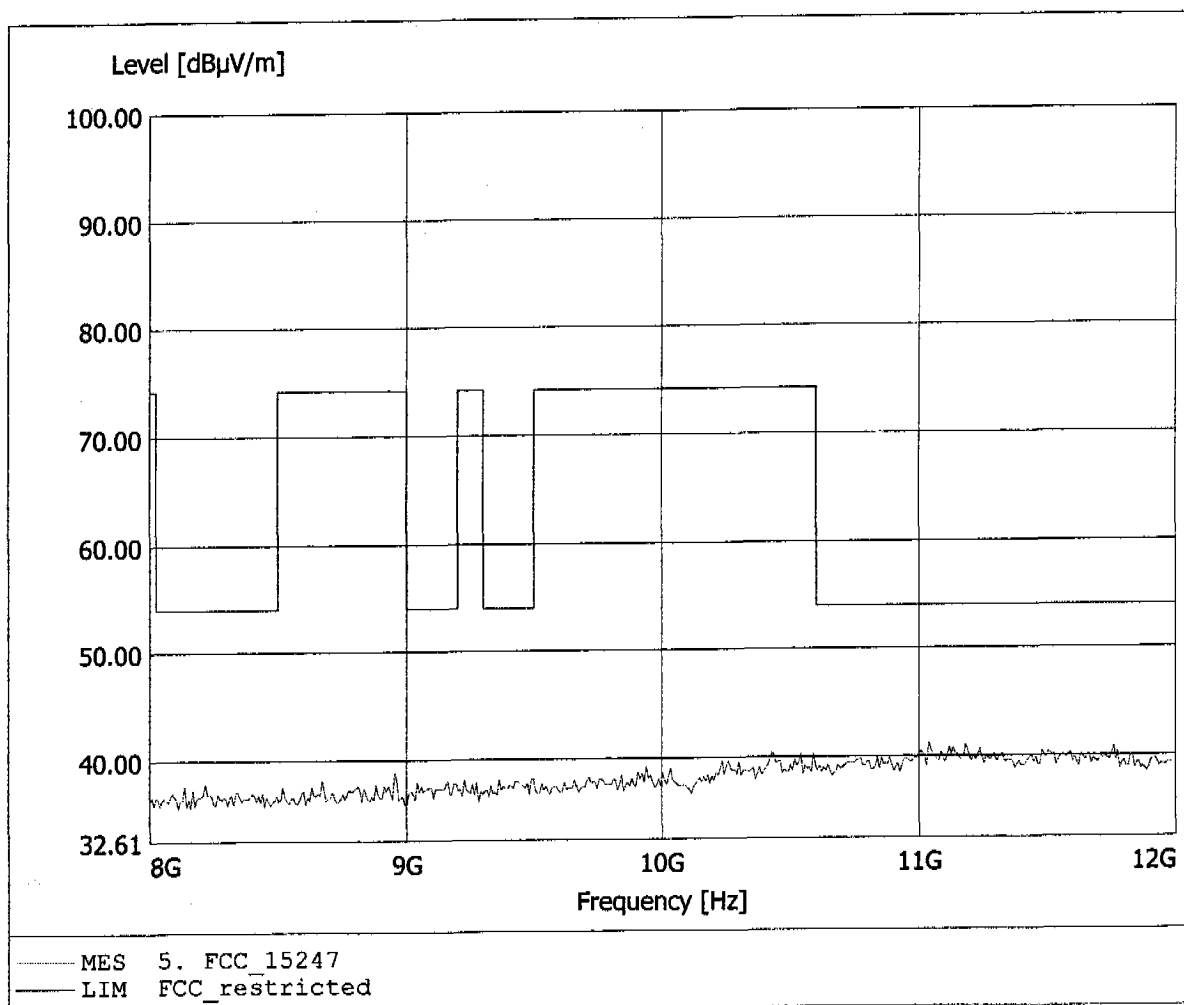


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2480 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.182GHz, Emax: 41.39dBµV/m, RBW: 1MHz

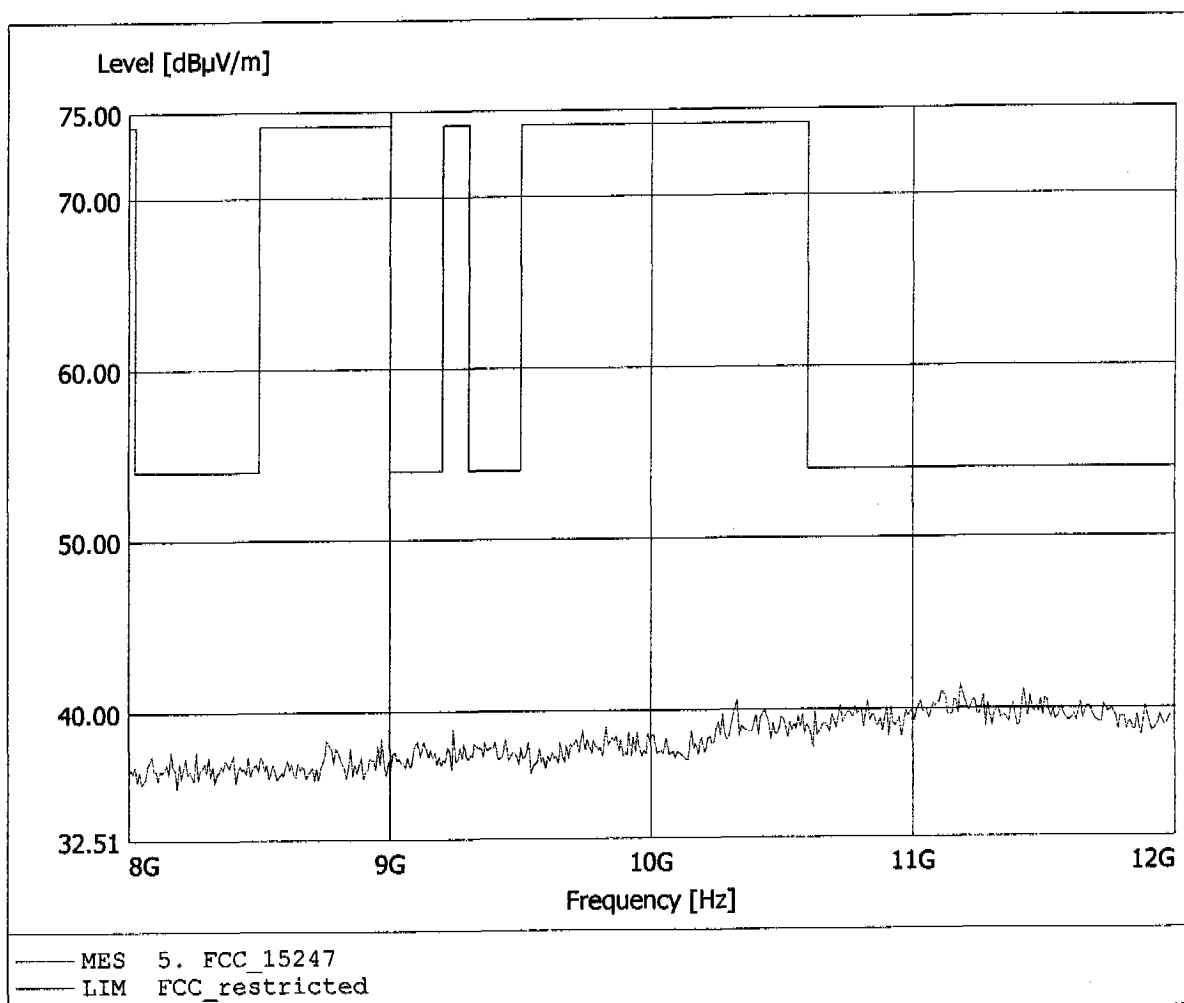


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2480 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.695GHz, Emax: 42.96dBuV/m, RBW: 1MHz

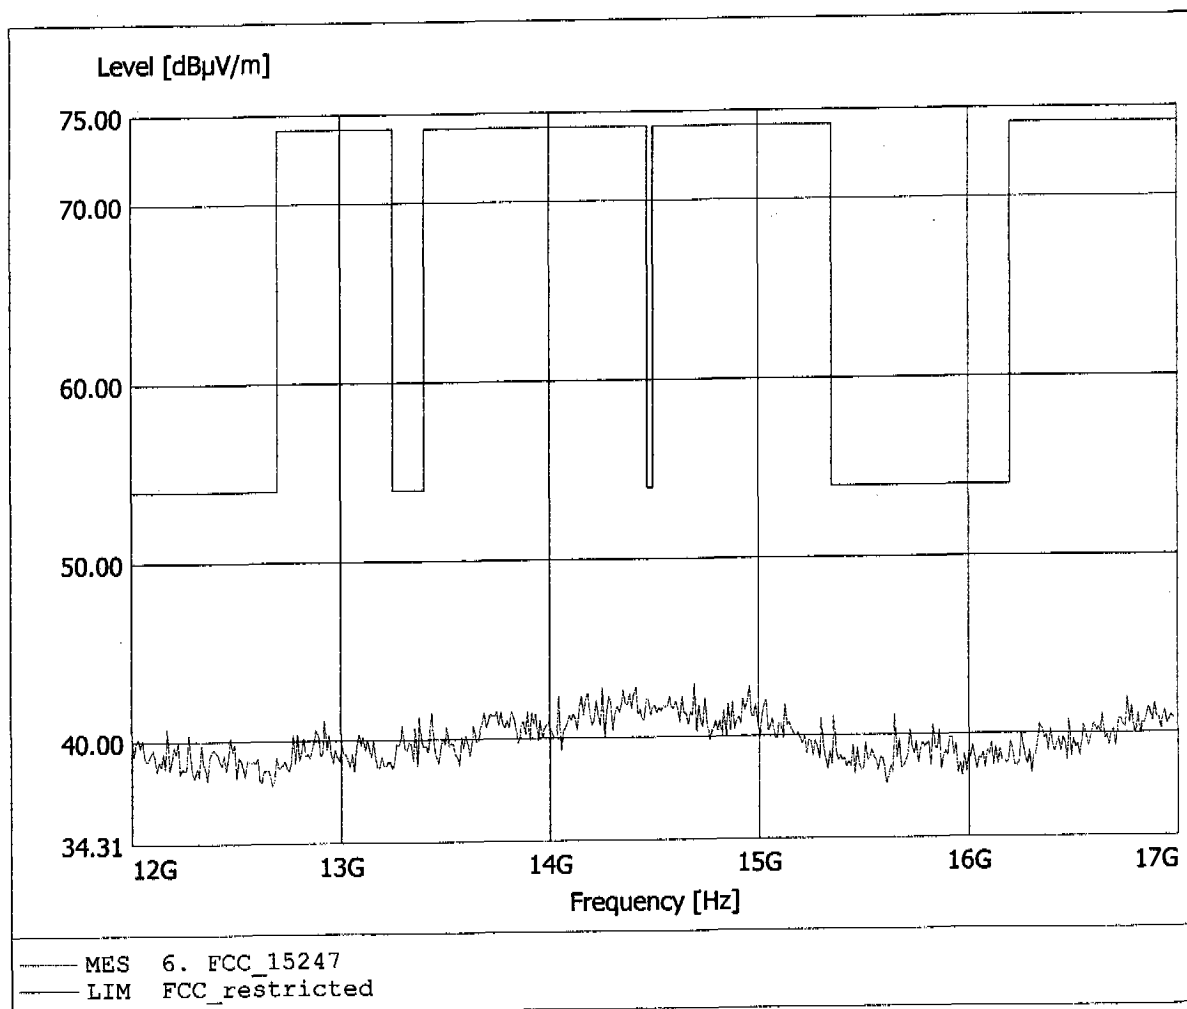


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2480 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.365GHz, Emax: 43.70dBµV/m, RBW: 1MHz

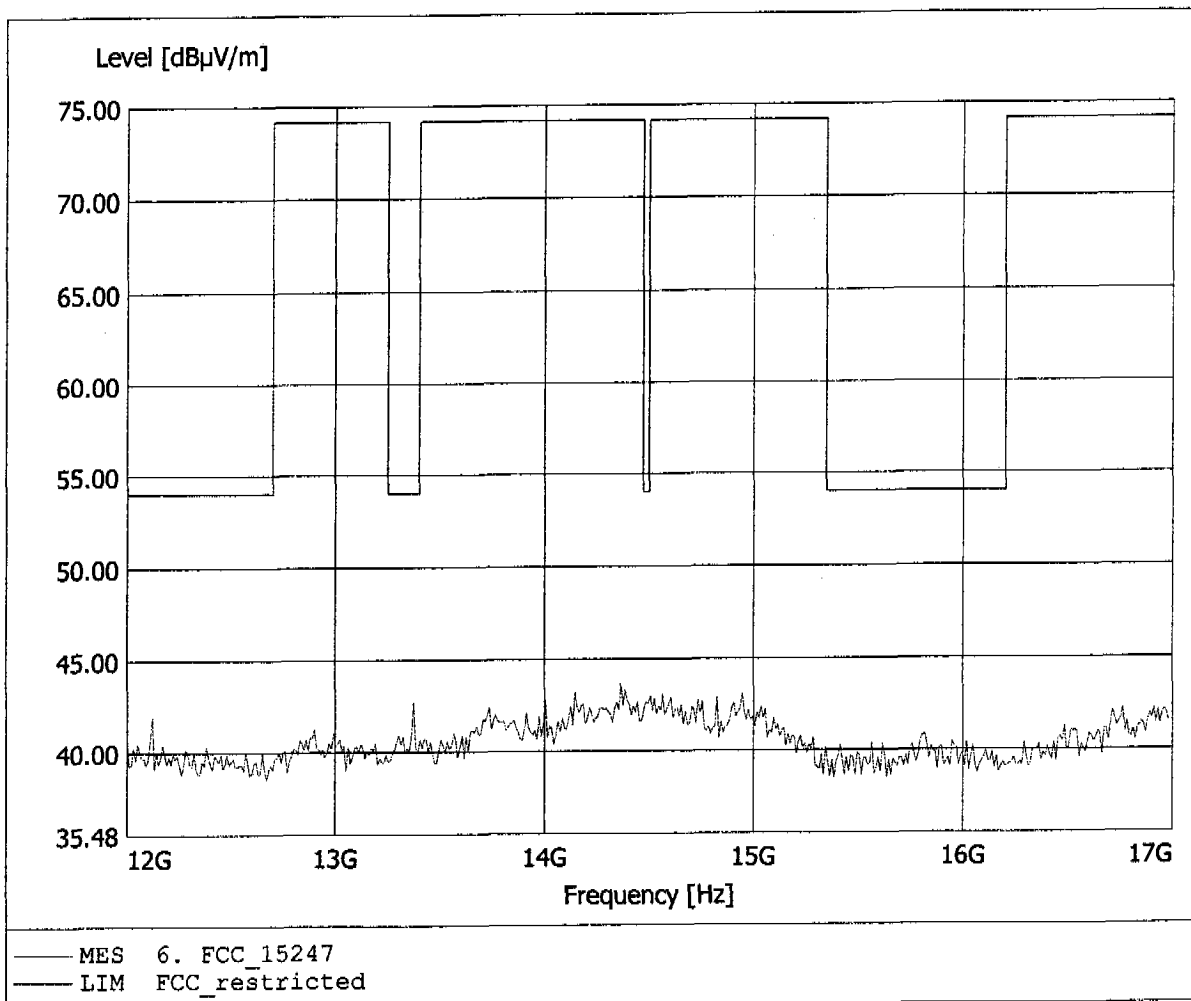


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2480 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.038GHz, Emax: 45.24dBµV/m, RBW: 1MHz

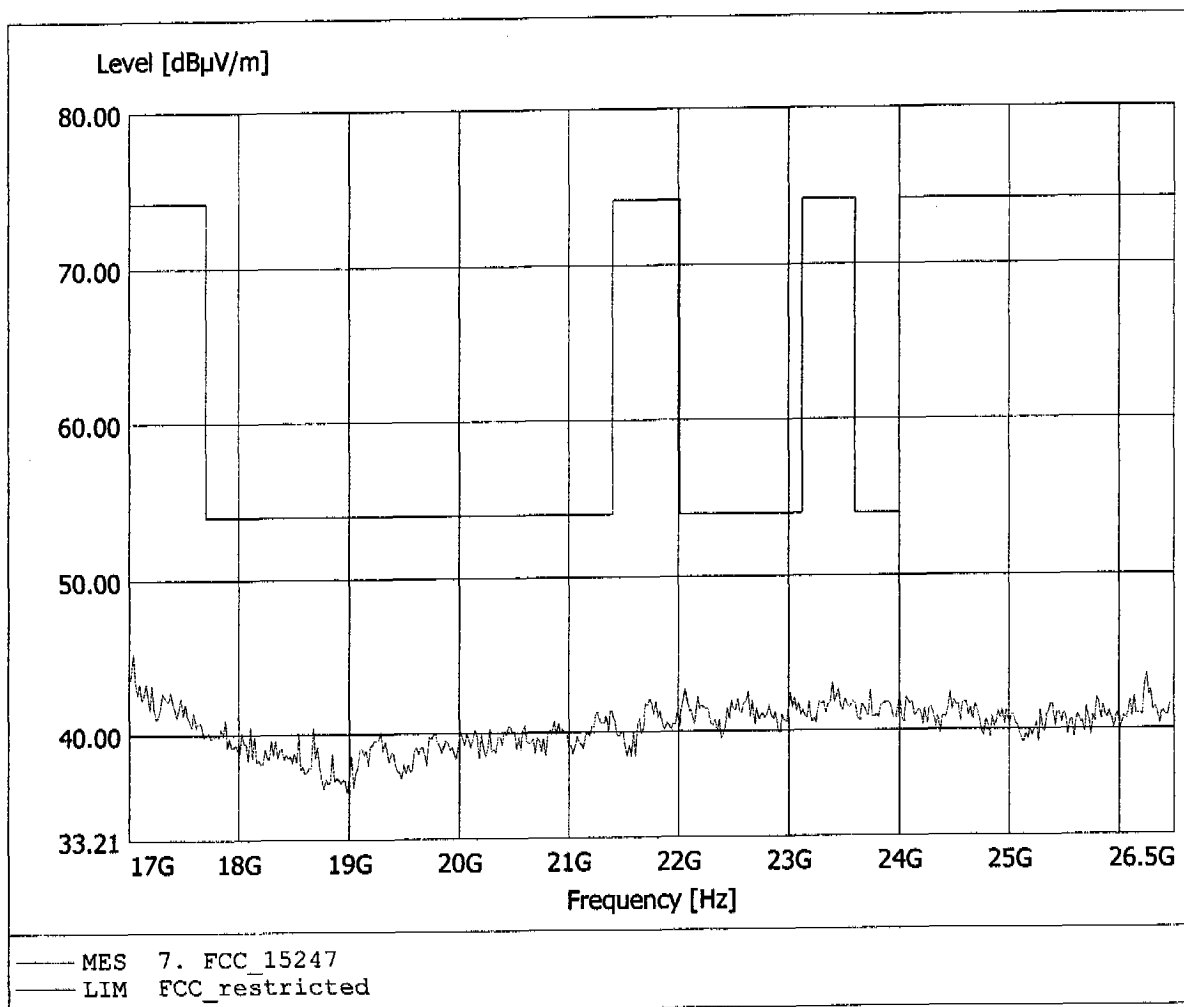

**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth audio gateway
Model: GN6110CU / 2480 MHz
Approval Holder: GN Netcom as
Operating Condition: Tnom: 23°C / Unom: 7.5 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Fleischer
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.019GHz, Emax: 44.20dBµV/m, RBW: 1MHz

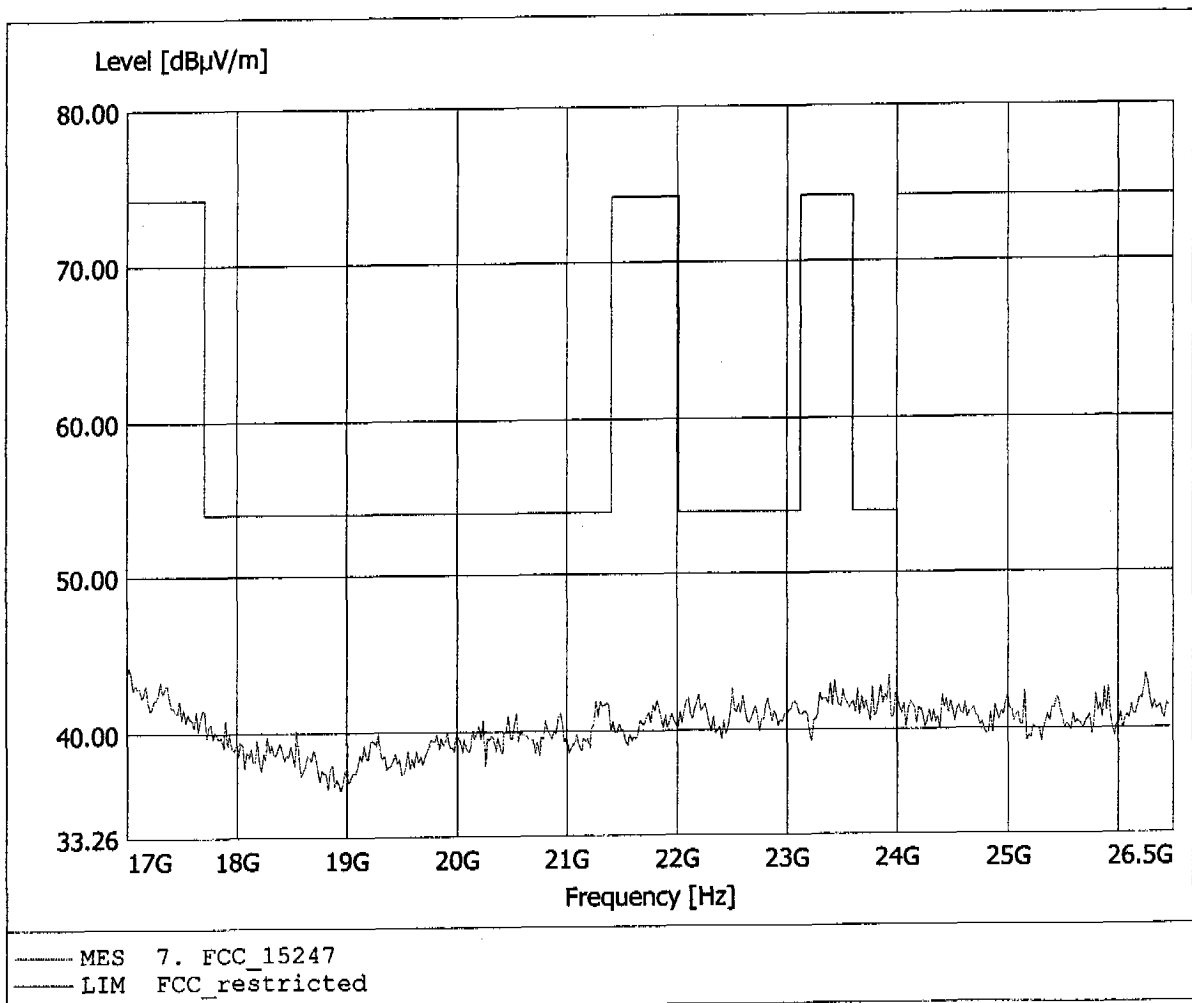



Appendix D

Spurious Emissions conducted - Transmitter operating




Appendix E

Carrier Frequency Separation



Delta 1 [T1] RBW 100 kHz RF Att 40 dB
Ref Lvl 0.03 dB VBW 100 kHz
15 dBm 1.00080160 MHz SWT 5 ms Unit dBm

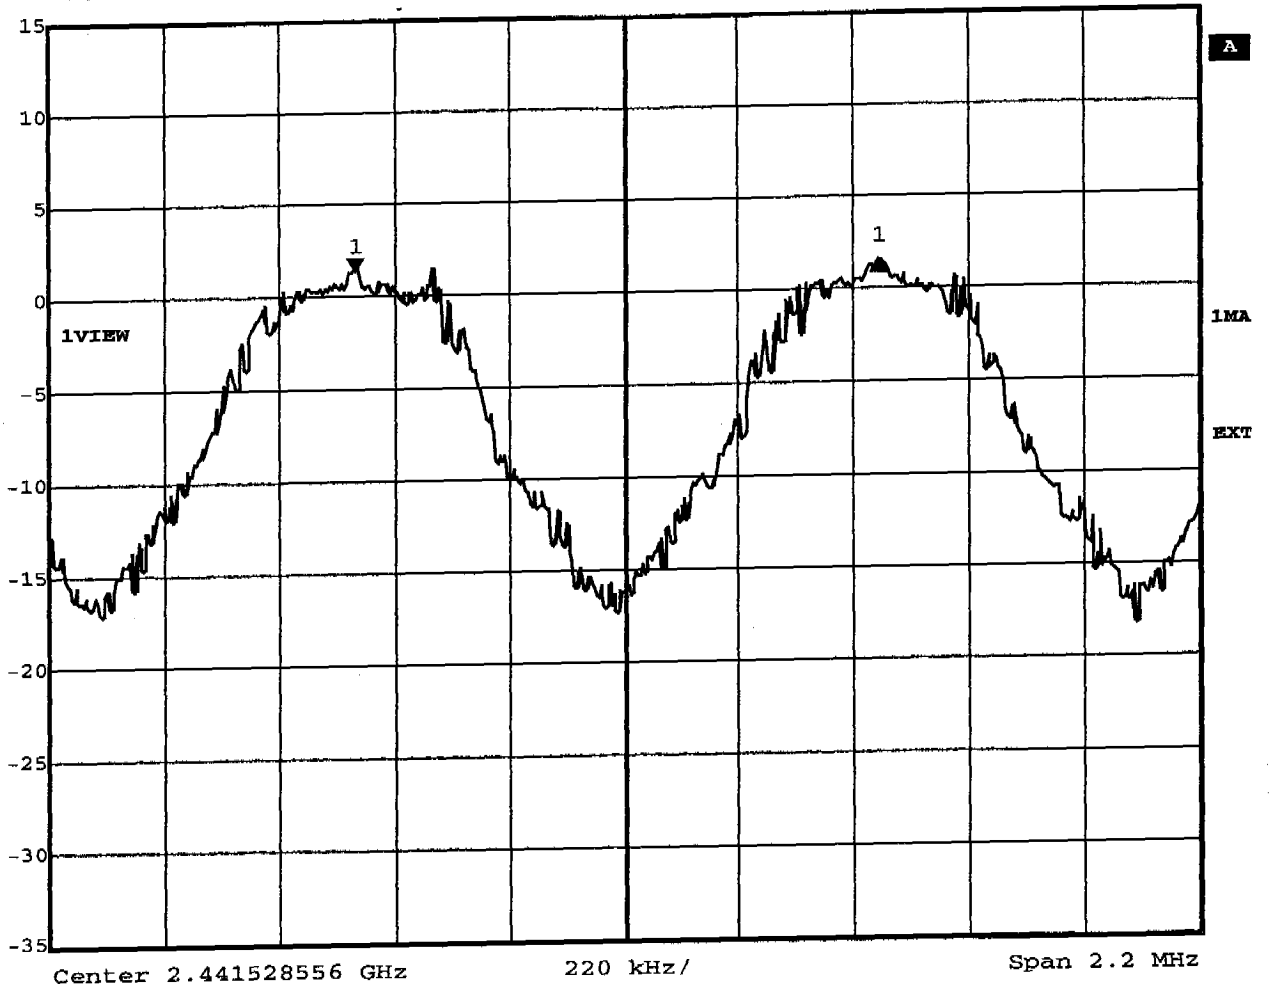

Title: Carrier Frequency Separation
Comment A: GN6110CU
Date: 30.OCT.2003 09:54:39




Appendix F

Number of Hopping Frequencies




Marker 1 [T1] RBW 300 kHz RF Att 50 dB
Ref Lvl 1.05 dBm VBW 300 kHz
25 dBm 2.41504910 GHz SWT 5 ms Unit dBm

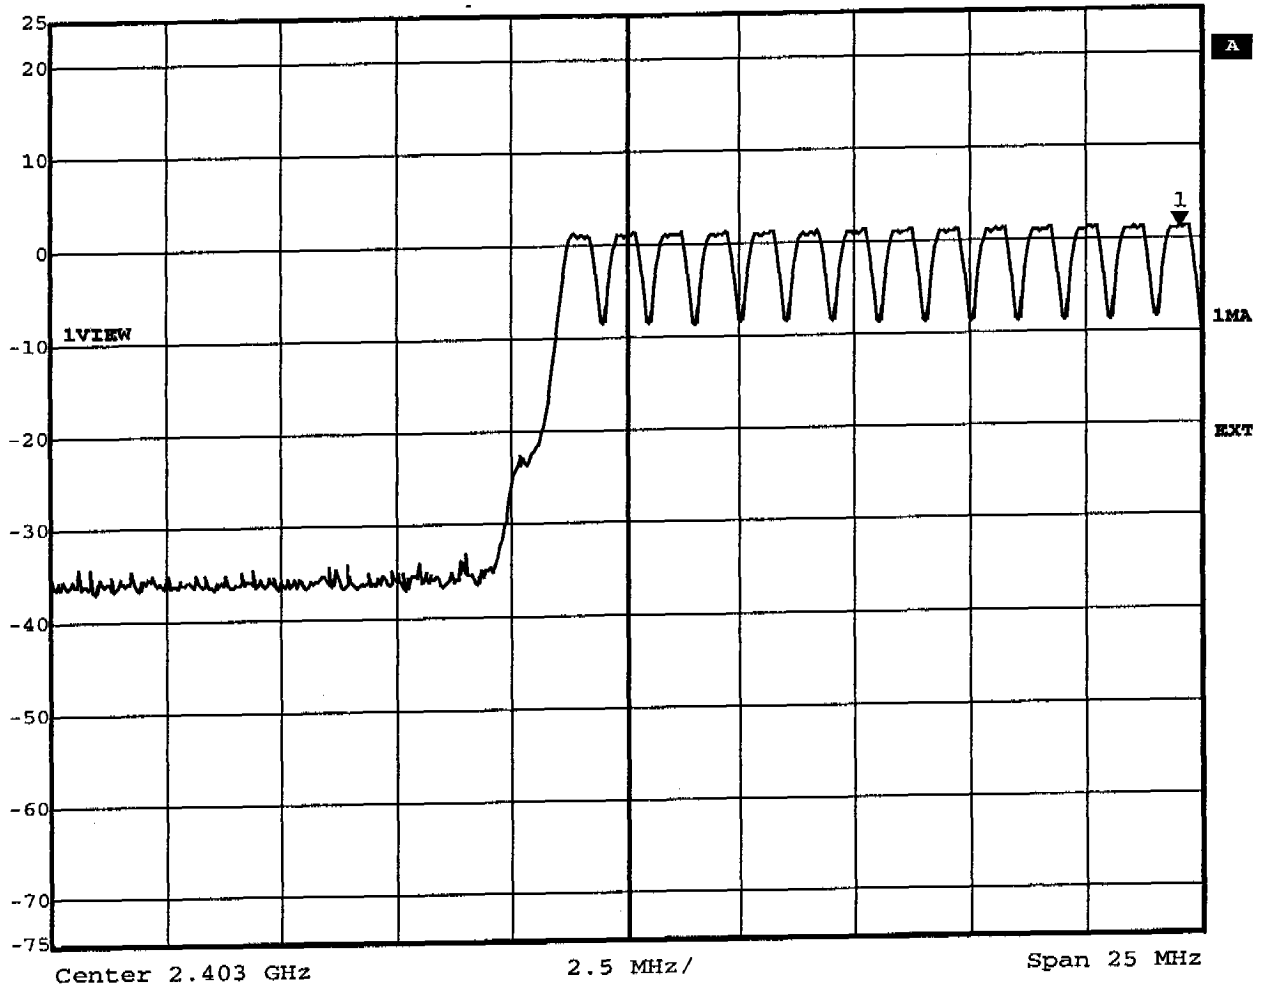

Title: Number of Hopping Frequencies Ch.: 0-13
Comment A: GN6110CU
Date: 30.OCT.2003 10:05:01




Marker 1 [T1] RBW 300 kHz RF Att 50 dB
Ref Lvl 1.05 dBm VBW 300 kHz
25 dBm 2.44004910 GHz SWT 5 ms Unit dBm

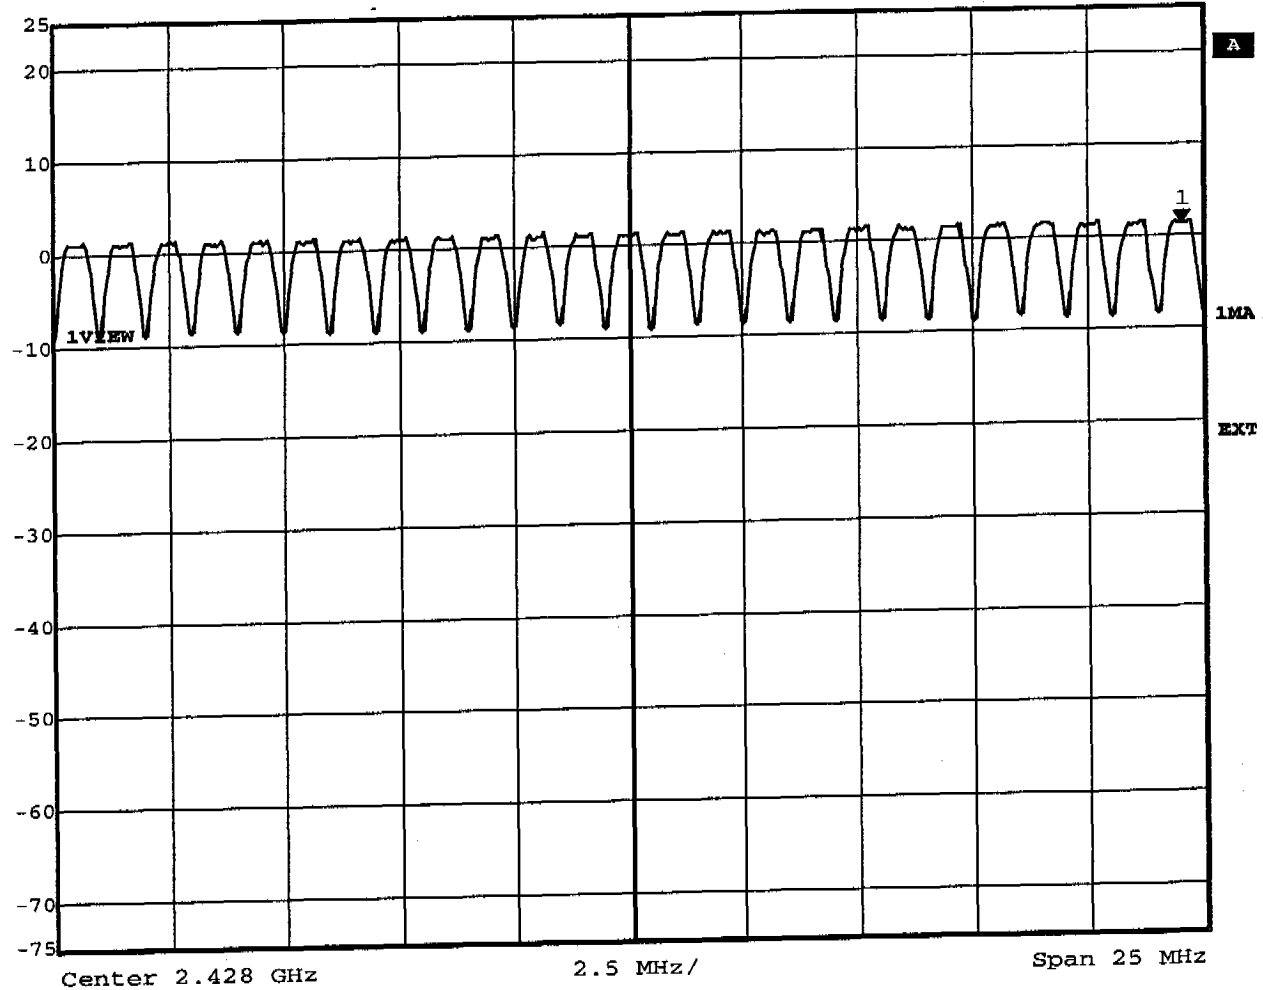

Title: Number of Hopping Frequencies Ch.: 14-38
Comment A: GN6110CU
Date: 30.OCT.2003 10:07:08




Ref Lvl	Marker 1 [T1]	RBW	300 kHz	RF Att	50 dB
25 dBm	1.52 dBm	VBW	300 kHz		
	2.46504910 GHz	SWT	5 ms	Unit	dBm

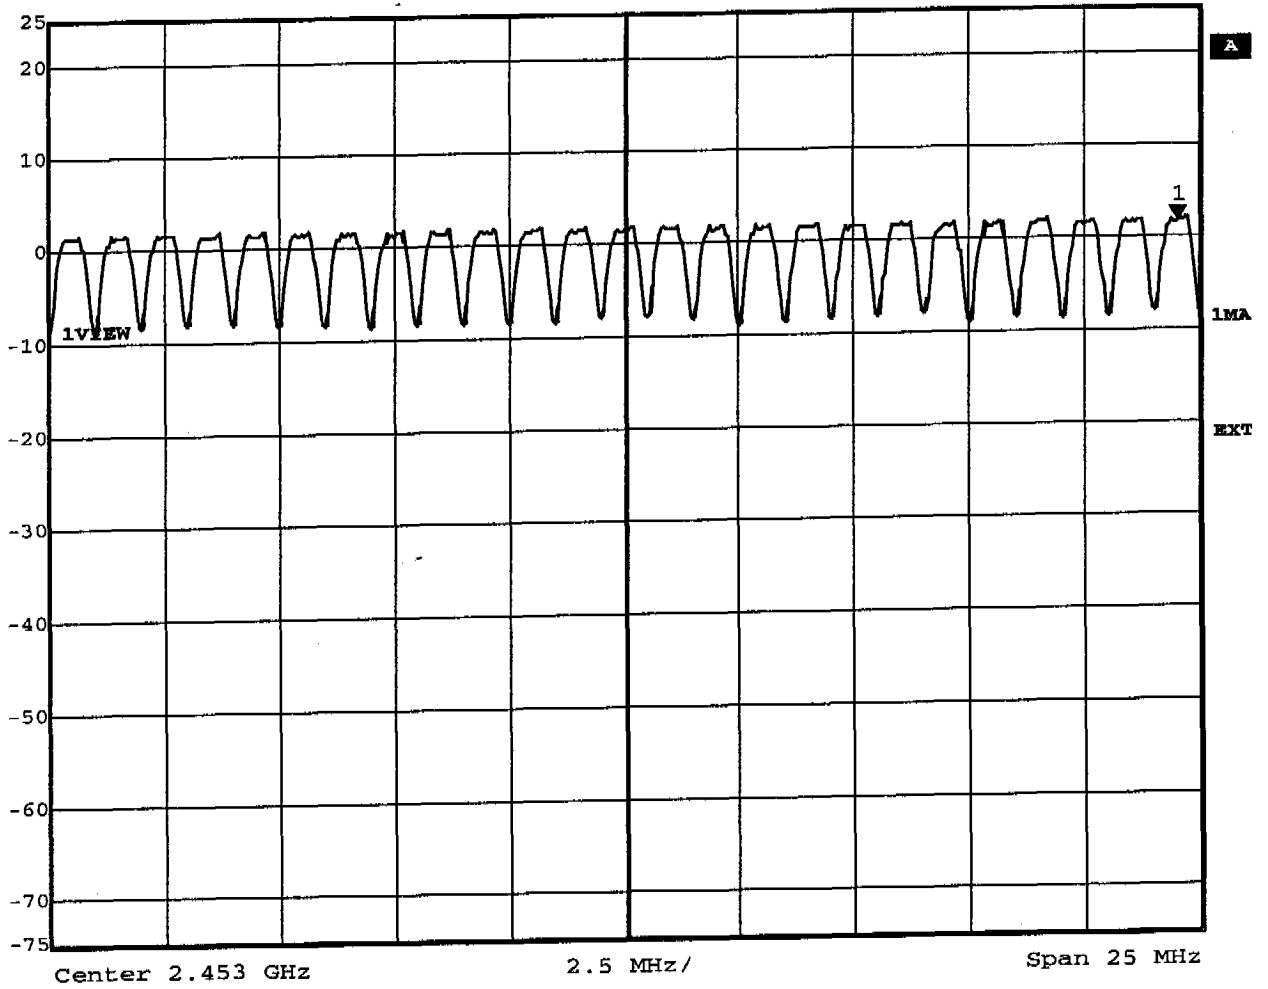

Title: Number of Hopping Frequencies Ch.: 39-63
Comment A: GN6110CU
Date: 30.OCT.2003 10:08:51



Marker 1 [T1] RBW 300 kHz RF Att 50 dB
Ref Lvl 1.28 dBm VBW 300 kHz
25 dBm 2.46605110 GHz SWT 5 ms Unit dBm

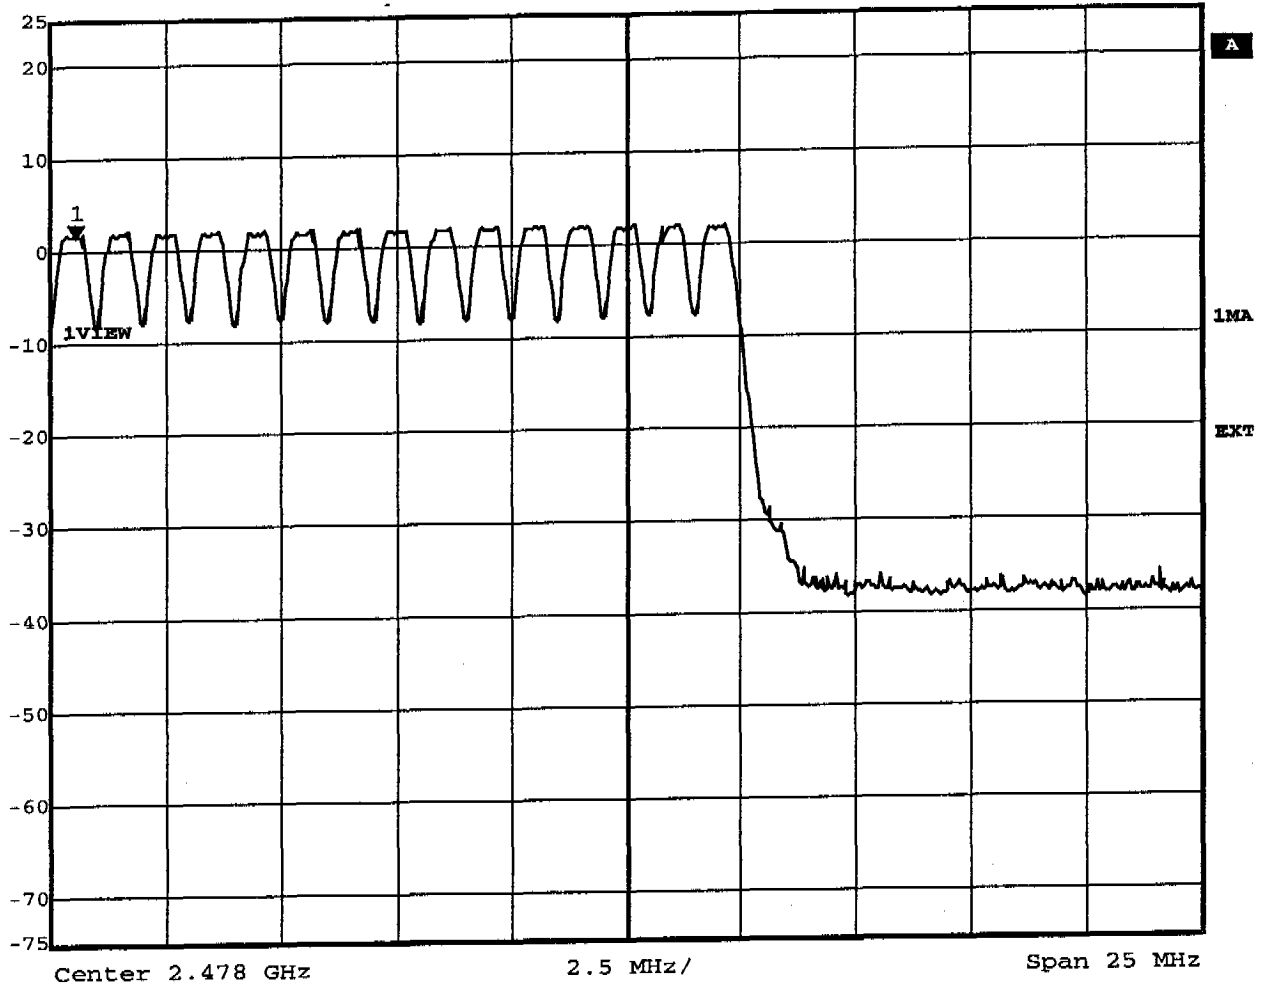


Title: Number of Hopping Frequencies Ch.: 64-78
Comment A: GN6110CU
Date: 30.OCT.2003 10:10:16



Ref Lvl
25 dBm

RBW 300 kHz RF Att 50 dB
VBW 300 kHz
SWT 5 ms Unit dBm

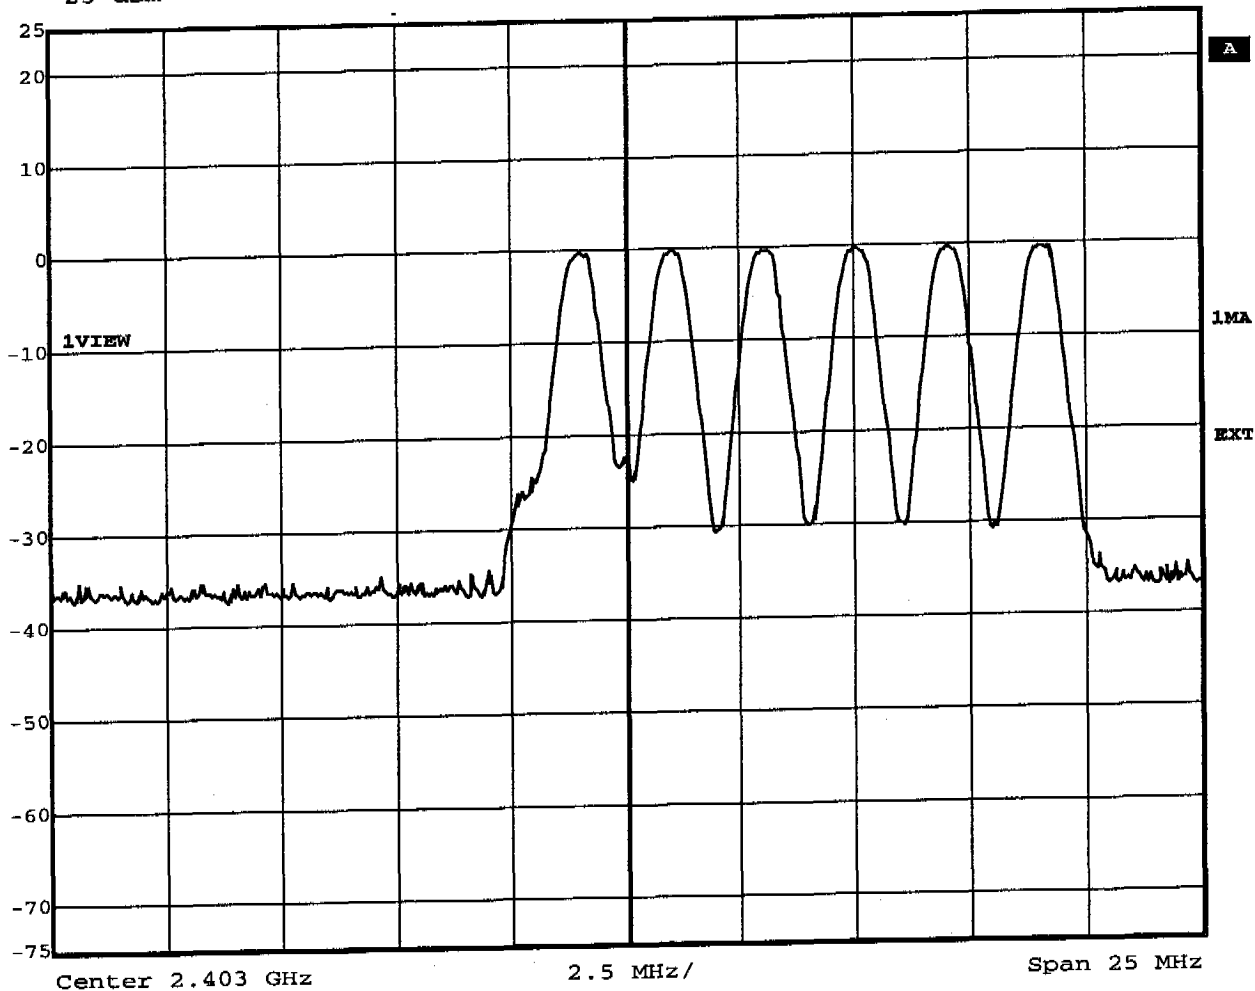


Title: Number of Hopping Frequencies (Master Inquiry Mode)
Comment A: GN6110CU
Date: 30.OCT.2003 10:17:32



Ref Lvl
25 dBm

RBW 300 kHz RF Att 50 dB
VBW 300 kHz
SWT 5 ms Unit dBm

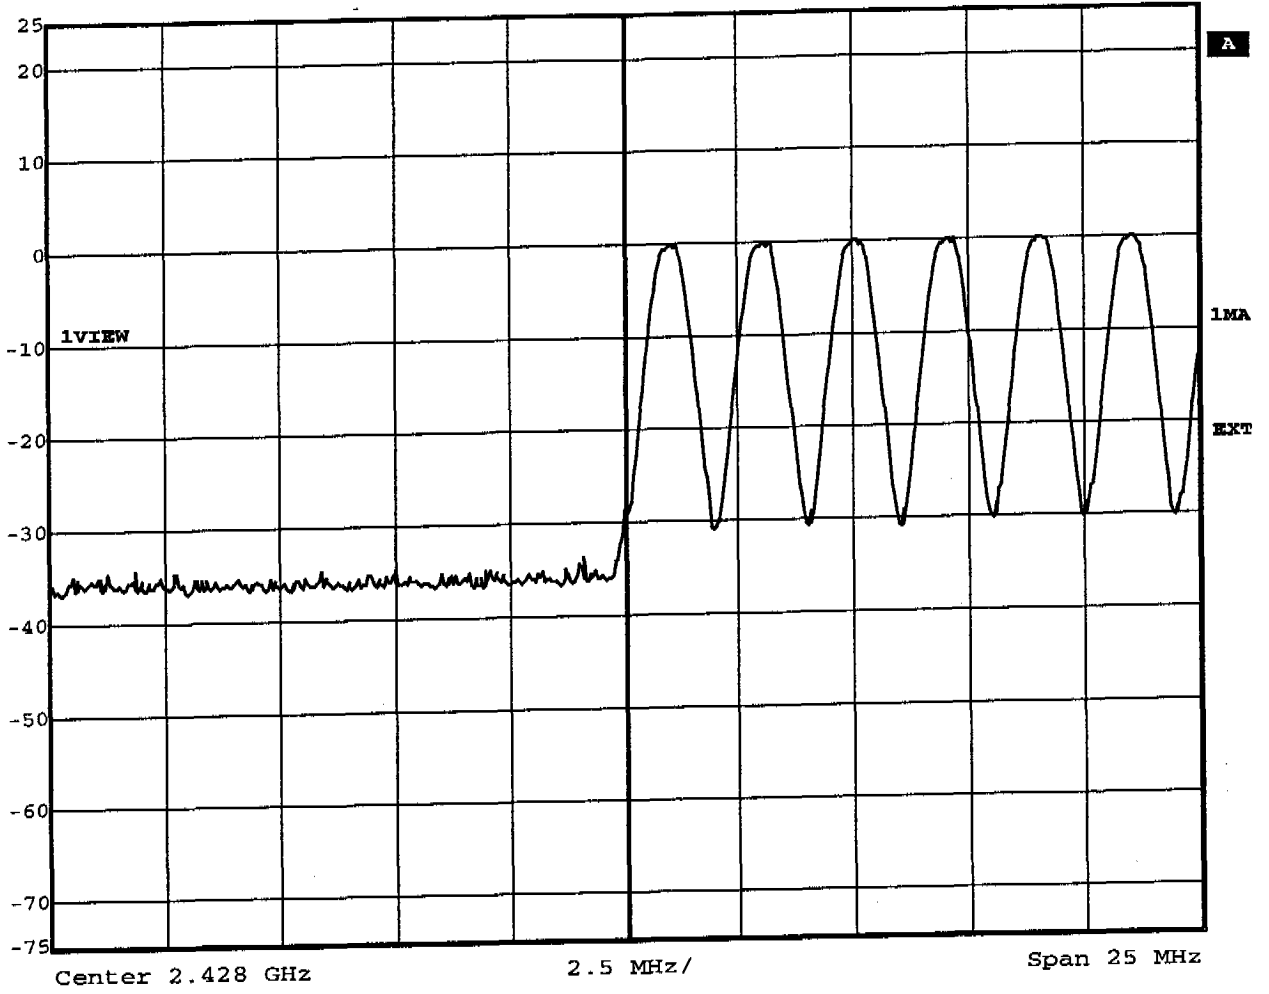


Title: Number of Hopping Frequencies (Master Inquiry Mode)
Comment A: GN6110CU
Date: 30.OCT.2003 10:24:38



Ref Lvl
25 dBm

RBW 300 kHz RF Att 50 dB
VBW 300 kHz
SWT 5 ms Unit dBm

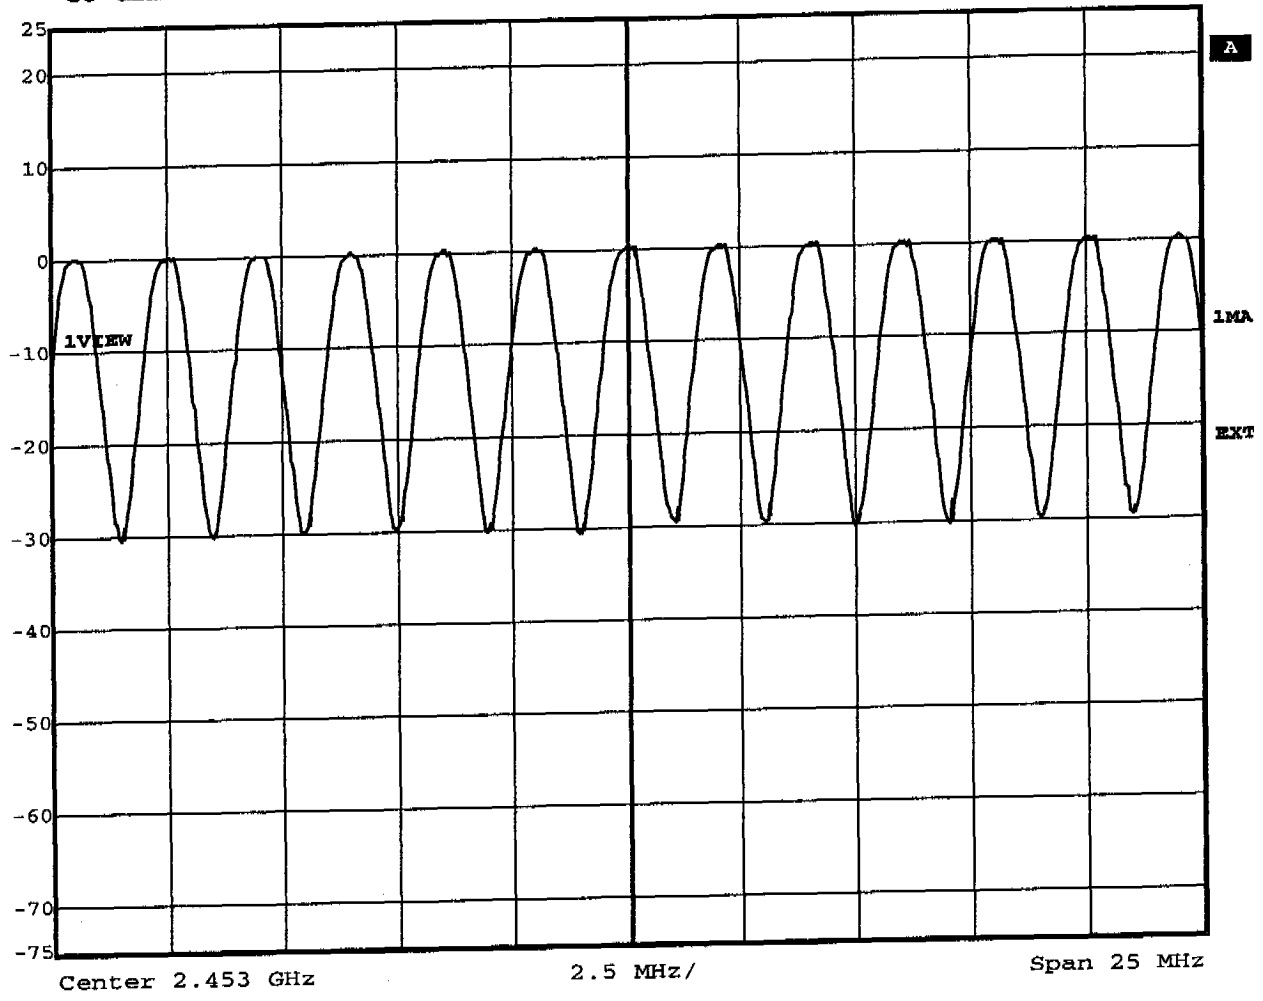


Title: Number of Hopping Frequencies (Master Inquiry Mode)
Comment A: GN6110CU
Date: 30.OCT.2003 10:29:38



Ref Lvl
25 dBm

RBW 300 kHz RF Att 50 dB
VBW 300 kHz
SWT 5 ms Unit dBm

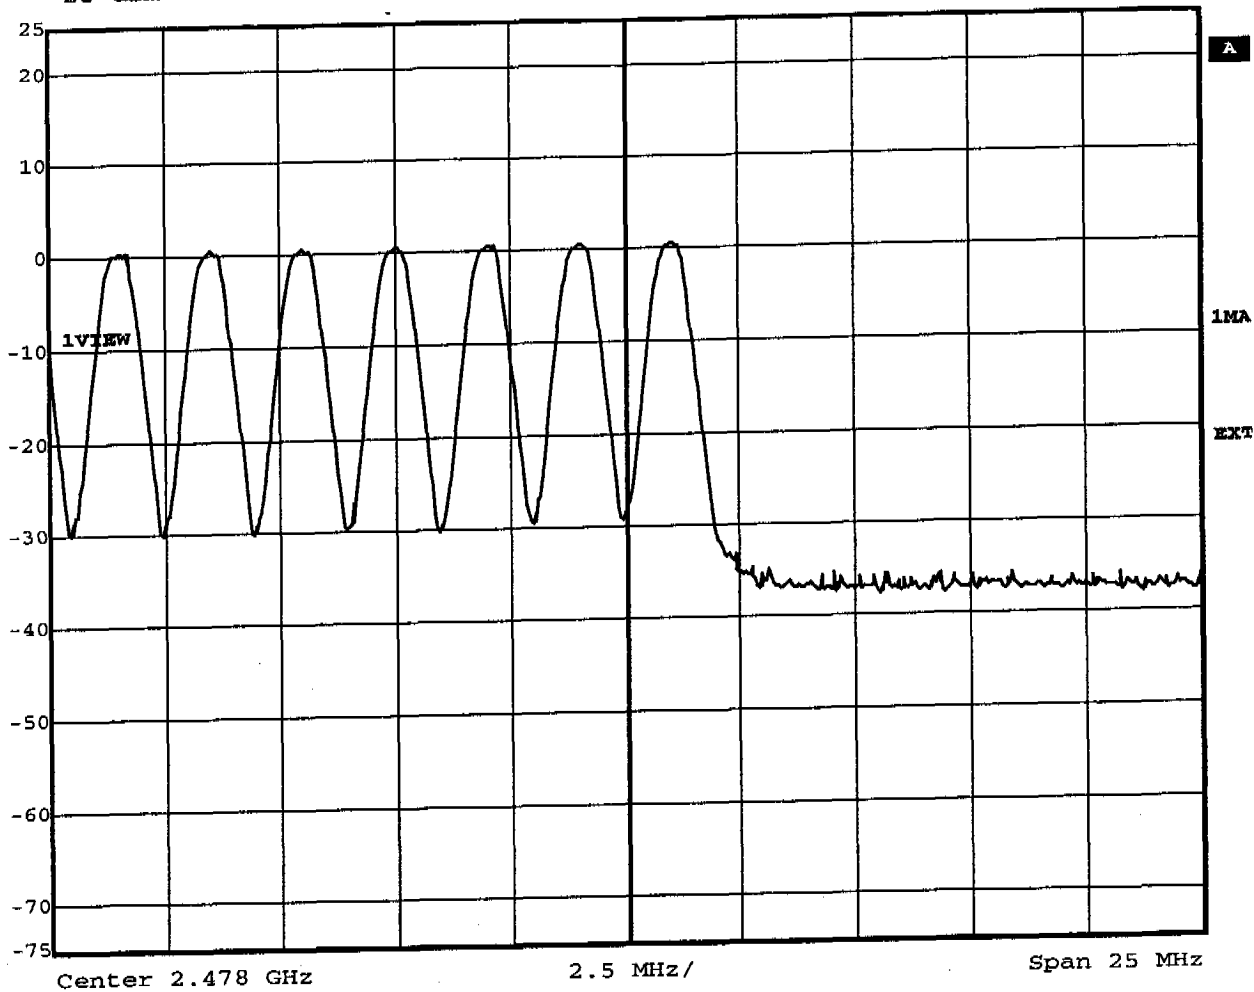

Title: Number of Hopping Frequencies (Master Inquiry Mode)
Comment A: GN6110CU
Date: 30.OCT.2003 10:33:01




Appendix G

Time of Occupancy (Dwell Time)




Delta 1 [T1] RBW 1 MHz RF Att 40 dB
Ref Lvl 0.70 dB VBW 1 MHz
10 dBm 119.913026 μ s SWT 300 μ s Unit dBm

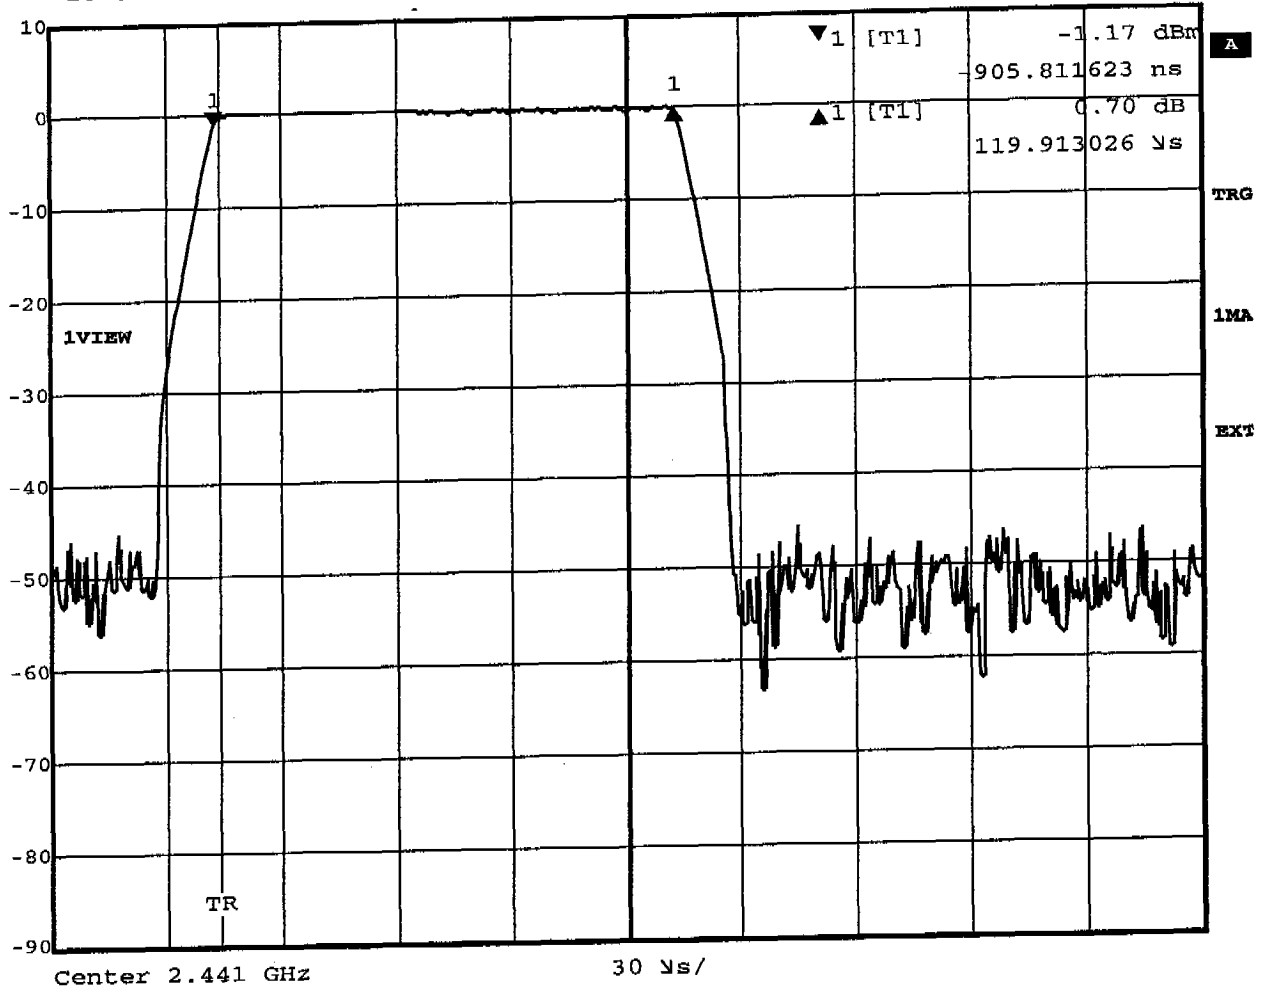

Title: Time of occupancy (Inquiry mode) 487 events * 0.120ms=58.4ms
Comment A: GN6110CU
Date: 30.OCT.2003 12:52:48




Delta 1 [T1] RBW 1 MHz RF Att 20 dB
Ref Lvl -0.01 dB VBW 1 MHz
10 dBm 2.922709 ms SWT 5 ms Unit dBm

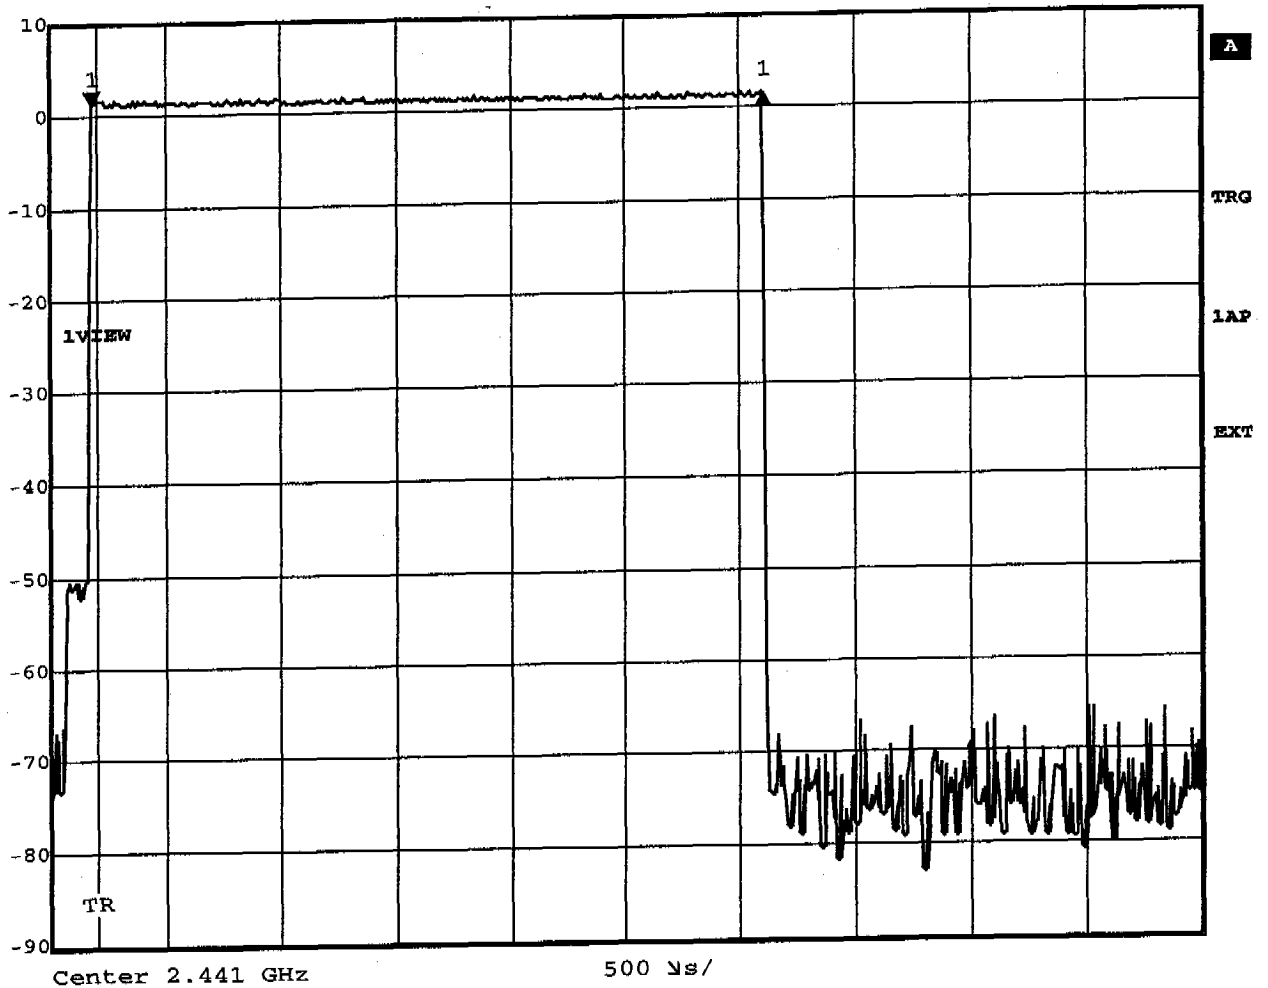

Title: Time of occupancy (Hopping DH5) 64 events * 2.923ms=187.07ms
Comment A: GN6110CU
Date: 30.OCT.2003 11:41:16



Delta 2 [T1] RBW 1 MHz RF Att 50 dB
Ref Lvl 0.12 dB VBW 1 MHz
27 dBm 6.288377 ms SWT 11 ms Unit dBm

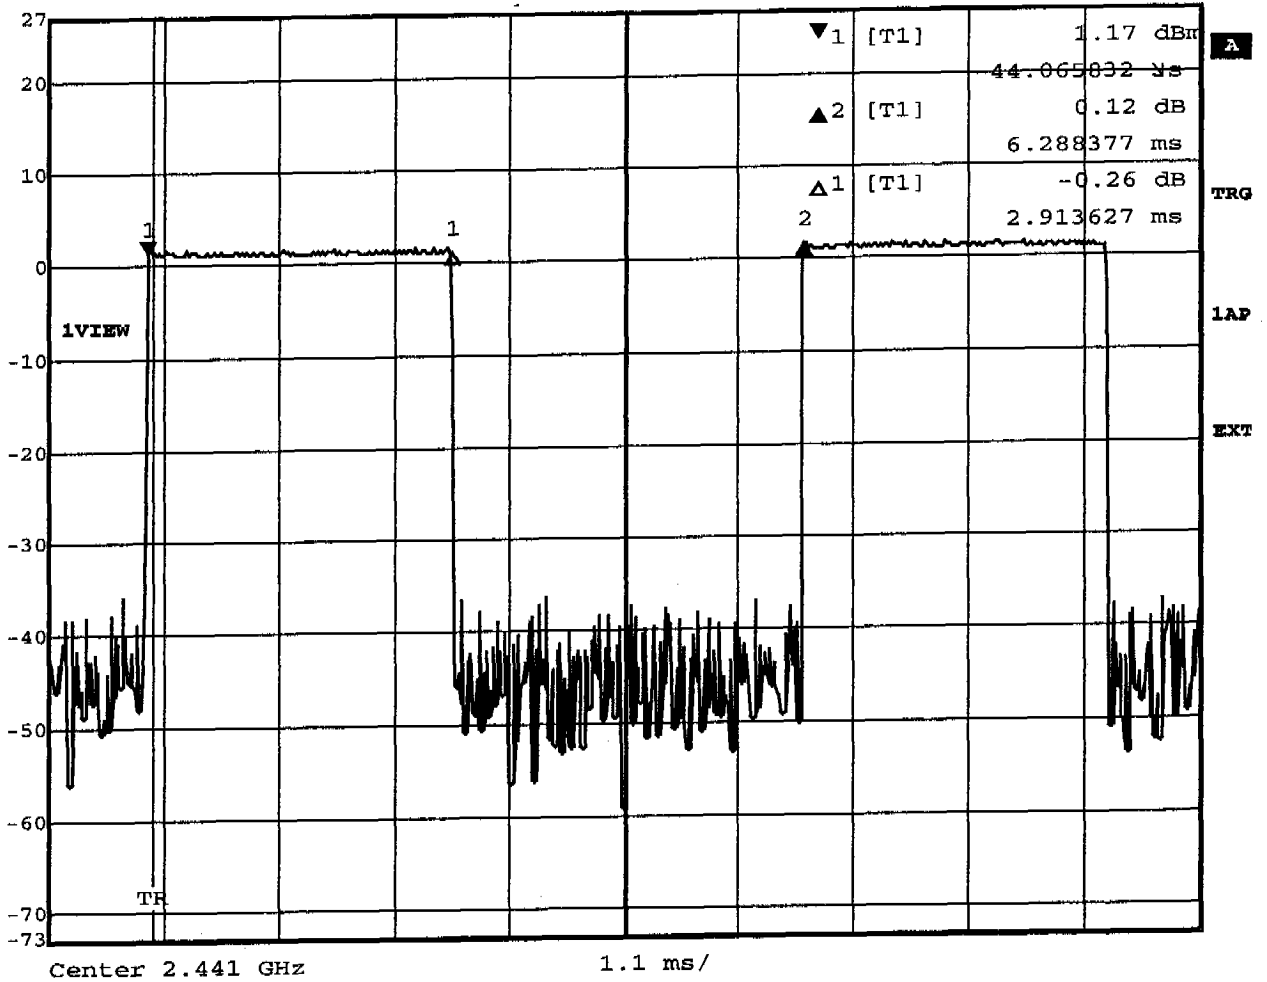

Title: Duty Cycle
Comment A: GN6110CU
Date: 30.OCT.2003 09:41:10




Appendix H

20dB Bandwidth




Delta 1 [T1] RBW 10 kHz RF Att 50 dB
Ref Lvl -0.39 dB VBW 10 kHz
25 dBm 873.74749499 kHz SWT 56 ms Unit dBm

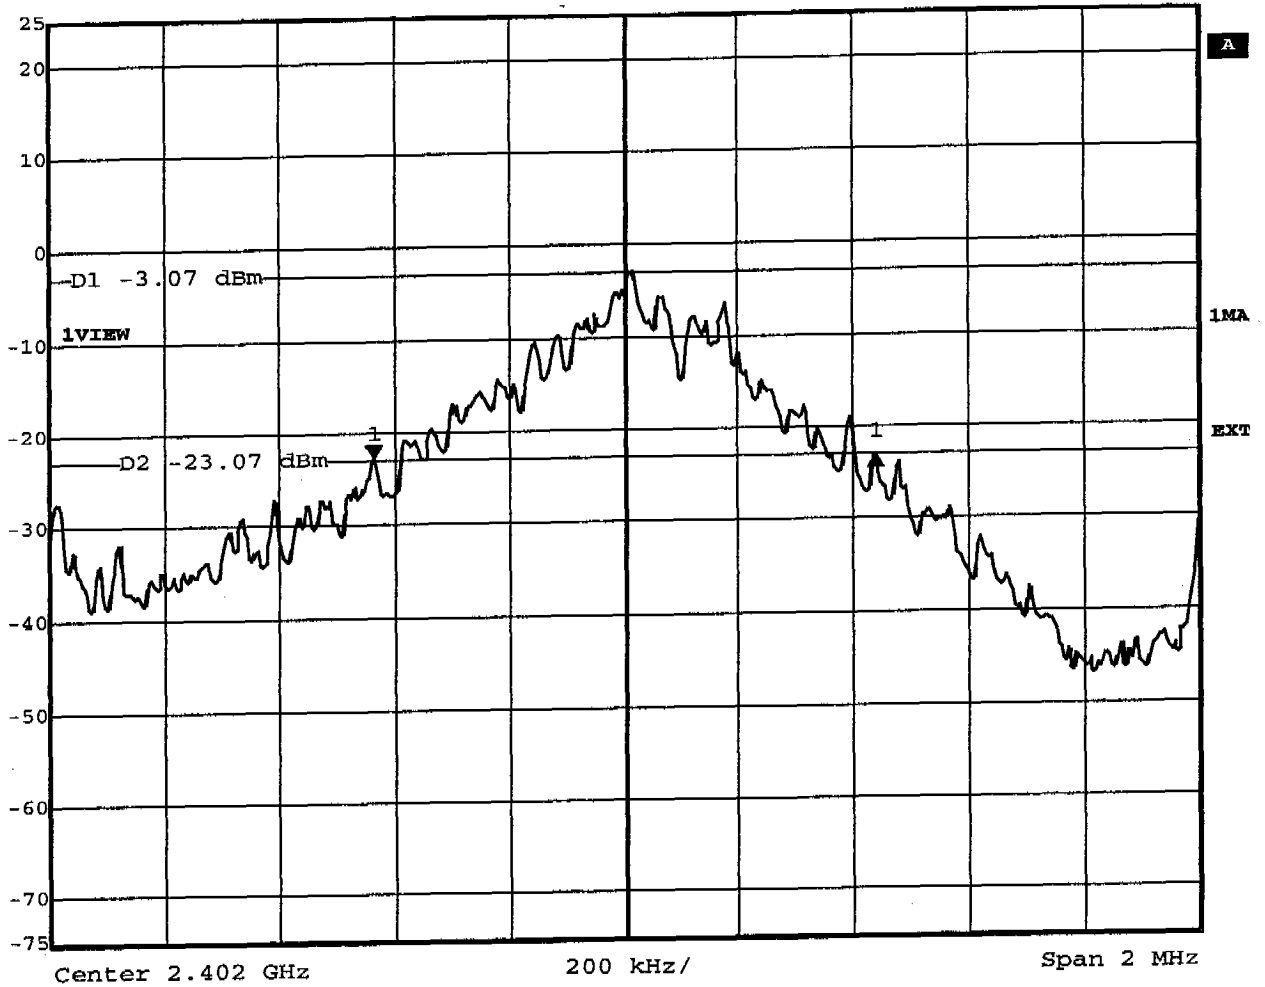

Title: -20dB Bandwidth Ch.: 0
Comment A: GN6110CU
Date: 30.OCT.2003 09:27:42




Delta 1 [T1] RBW 10 kHz RF Att 50 dB
Ref Lvl -0.51 dB VBW 10 kHz
25 dBm 825.65130260 kHz SWT 56 ms Unit dBm

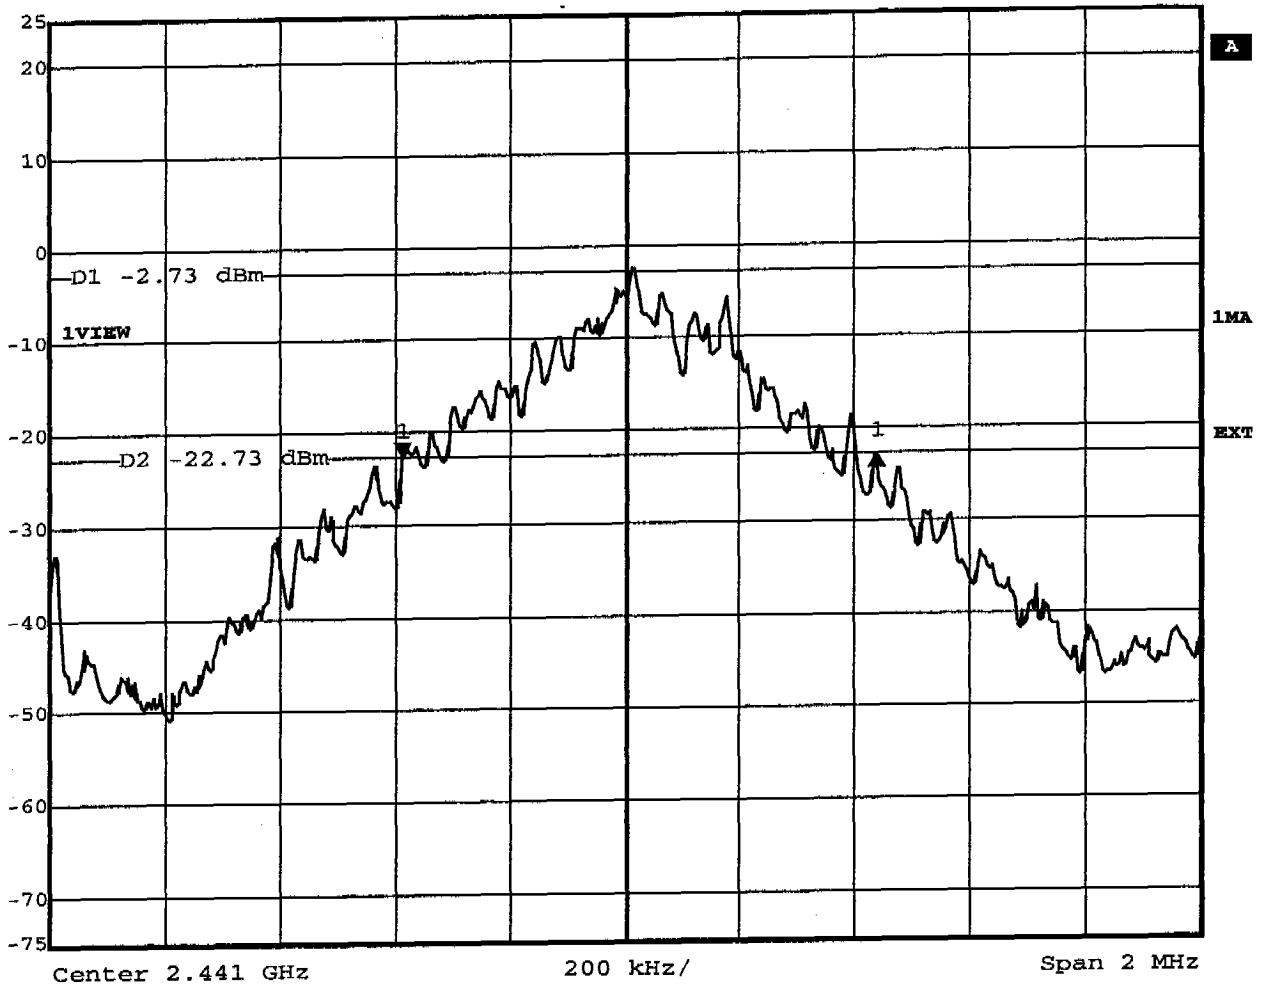

Title: -20dB Bandwidth Ch.: 39
Comment A: GN6110CU
Date: 30.OCT.2003 09:29:12



Delta 1 [T1]	RBW	10 kHz	RF Att	50 dB
Ref Lvl	-0.19 dB	VBW	10 kHz	
25 dBm	821.64328657 kHz	SWT	56 ms	Unit dBm

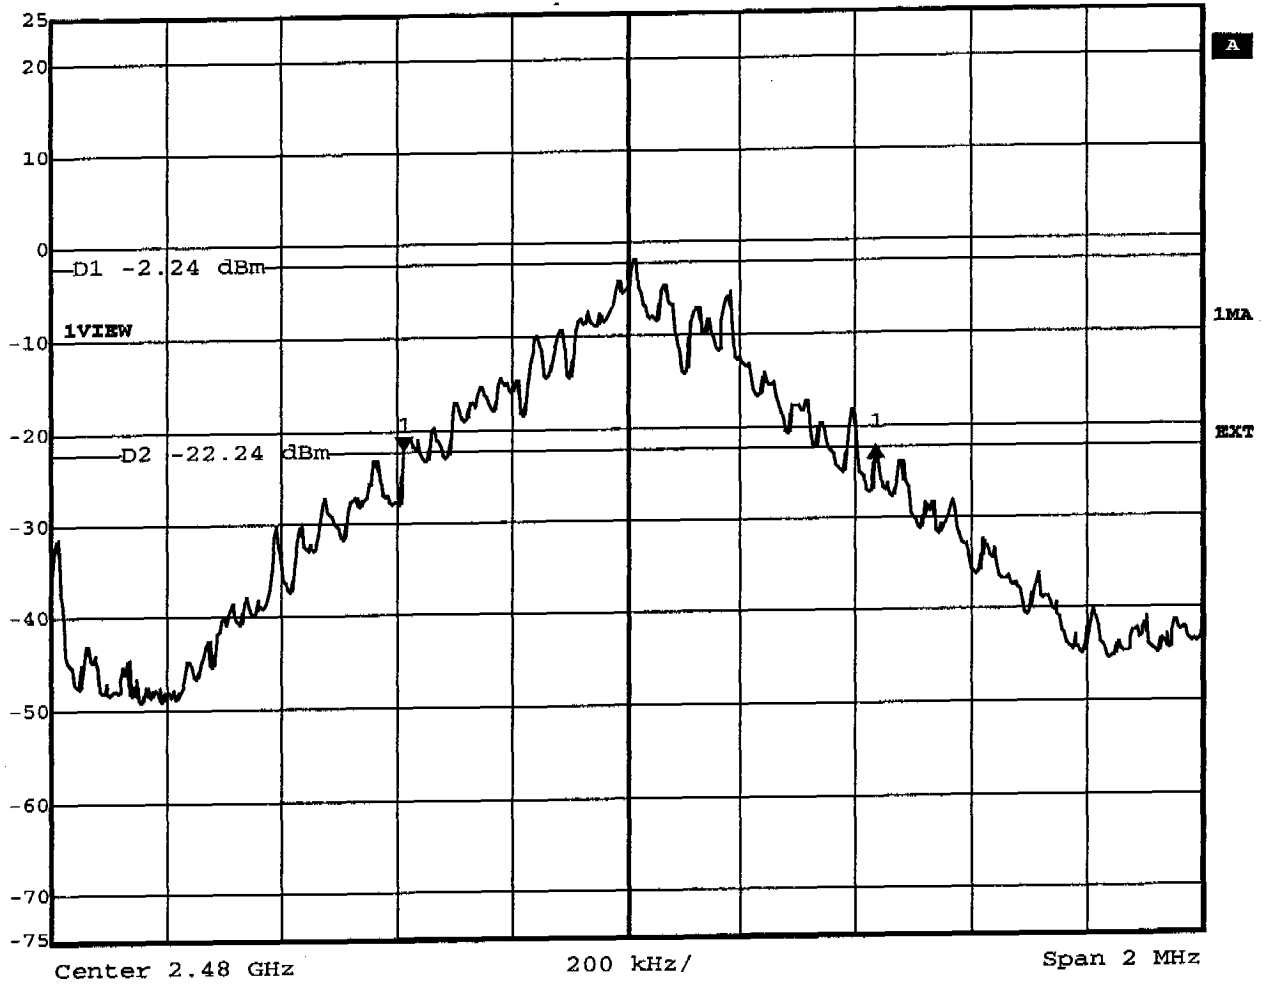

Title: -20dB Bandwidth Ch.: 78
Comment A: GN6110CU
Date: 30.OCT.2003 09:30:47




Appendix I

Band-edge Compliance of RF Emissions




Delta 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl 40.43 dB VBW 50 kHz
25 dBm 2.02705411 MHz SWT 5 ms Unit dBm

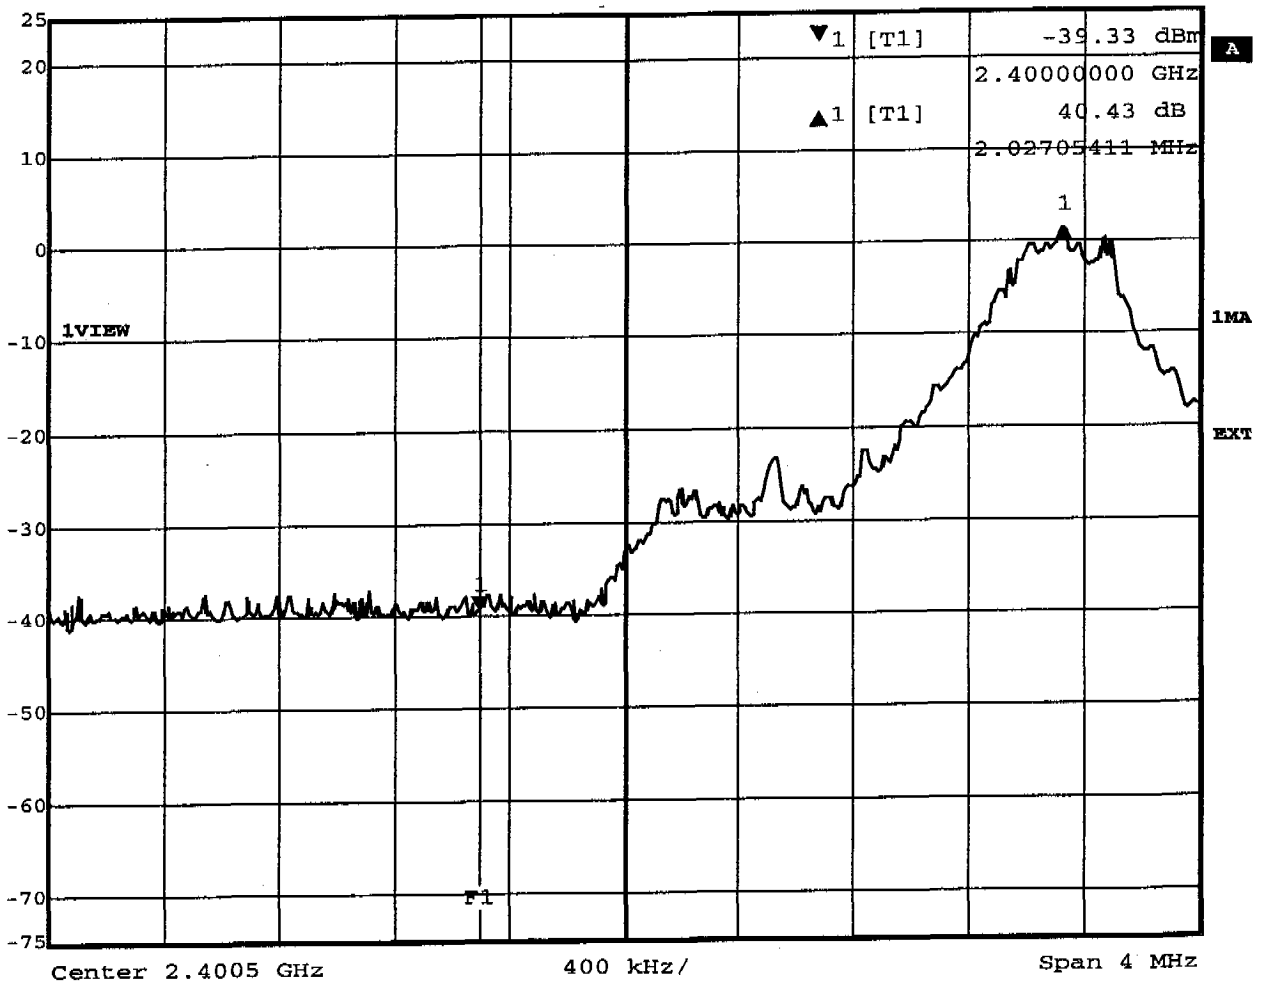

Title: Band-edge Compliance (conducted, single frequency)
Comment A: GN6110CU
Date: 30.OCT.2003 09:35:23




Delta 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl 42.66 dB VBW 50 kHz
25 dBm -3.32308617 MHz SWT 5 ms Unit dBm

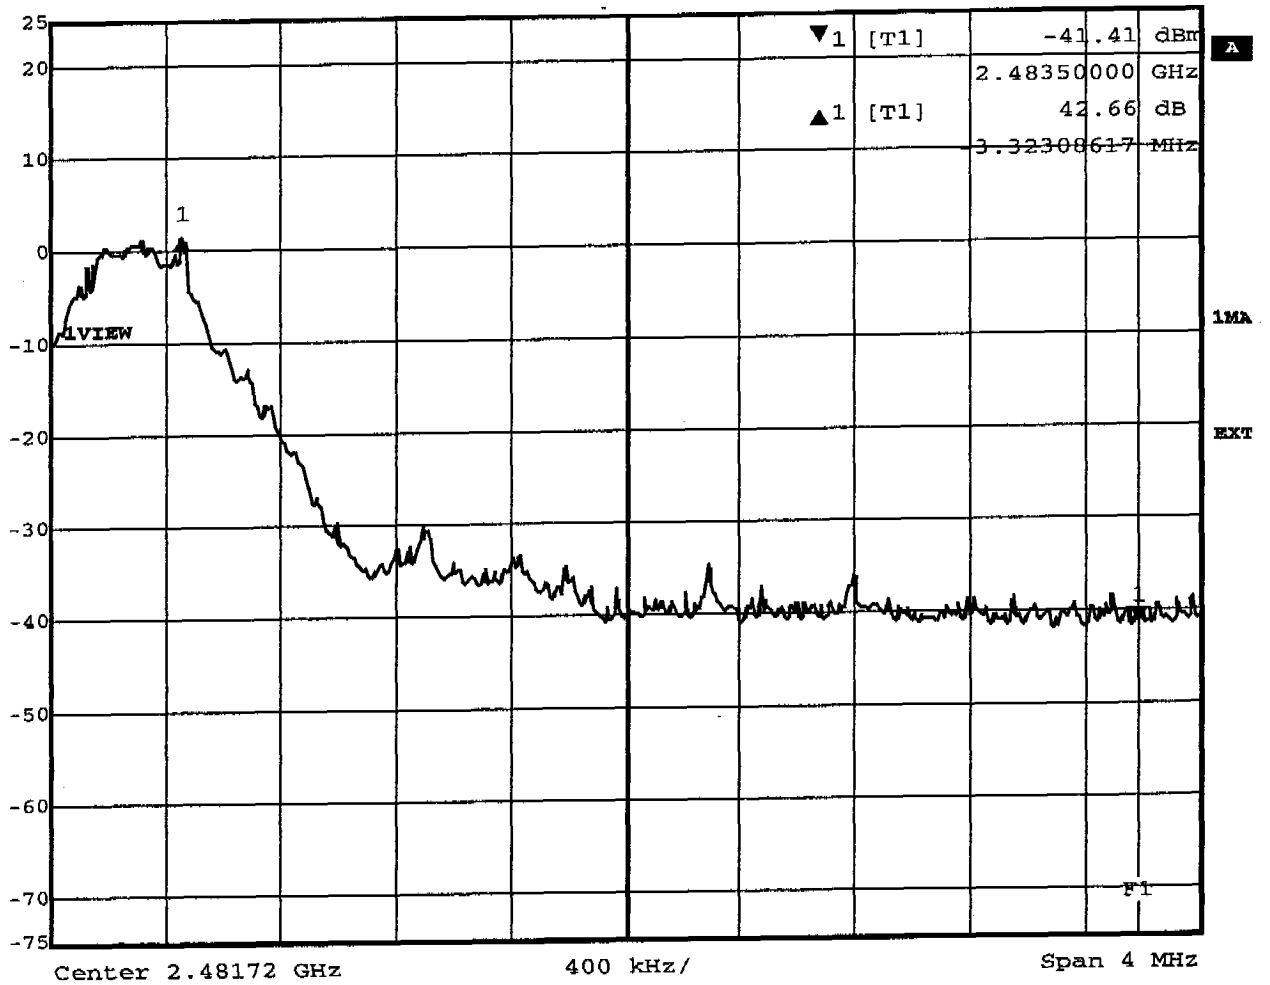

Title: Band-edge Compliance (conducted, single frequency)
Comment A: GN6110CU
Date: 30.OCT.2003 09:34:02




Delta 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl 38.28 dB VBW 50 kHz
25 dBm 2.00300601 MHz SWT 5 ms Unit dBm

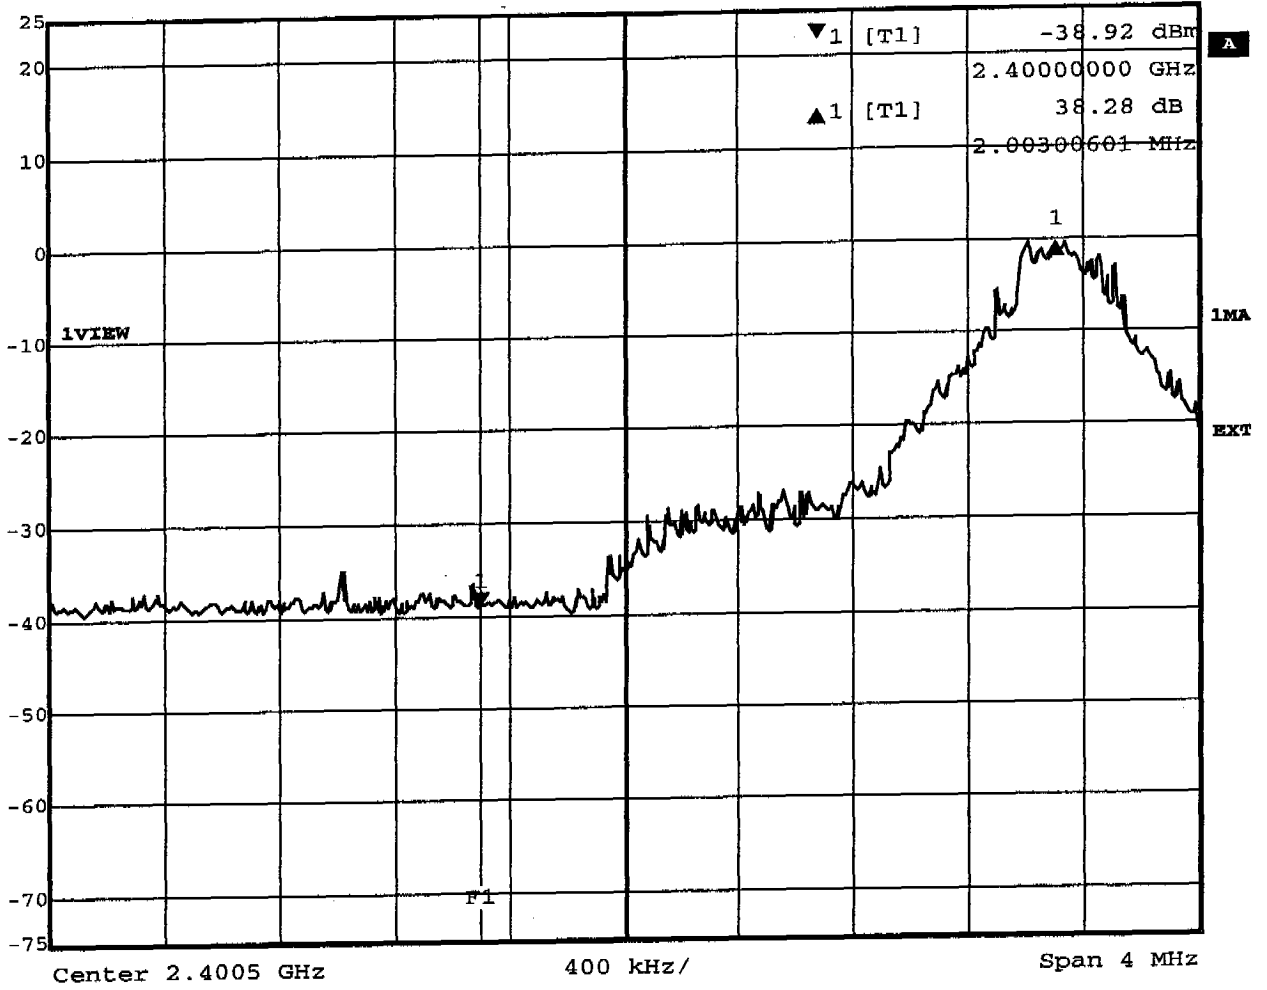

Title: Band-edge Compliance (conducted, hopping mode)
Comment A: GN6110CU
Date: 30.OCT.2003 09:46:11



Delta 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl 39.79 dB VBW 50 kHz
25 dBm -3.43531062 MHz SWT 5 ms Unit dBm

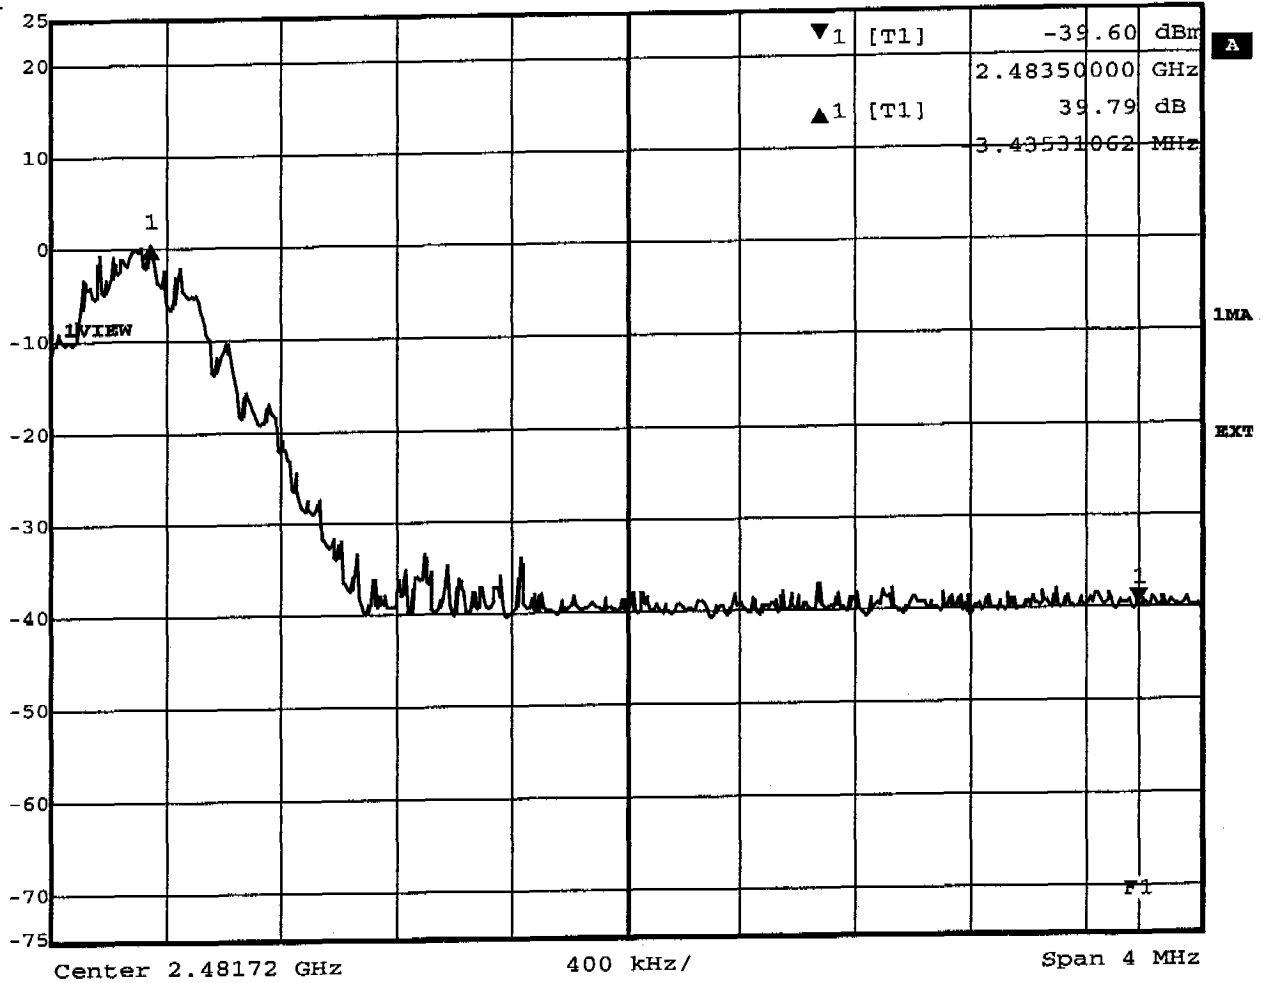

Title: Band-edge Compliance (conducted, hopping mode)
Comment A: GN6110CU
Date: 30.OCT.2003 09:48:56




Appendix J

Conducted Measurement at (AC) Power Line

EMI voltage test in the ac-mains according to FCC part 15

EUT: Wireless connectivity box based on Bluetooth Technology
Manufacturer: GN Netcom as
Operating Condition: Unom: 120VAC, Tnom: 23°C
Test Site: ETS
Operator: Mr. Pflug
Test Specification: V-Network: ESH2-Z5 (N)
Comment: model: GN6110 mode: link

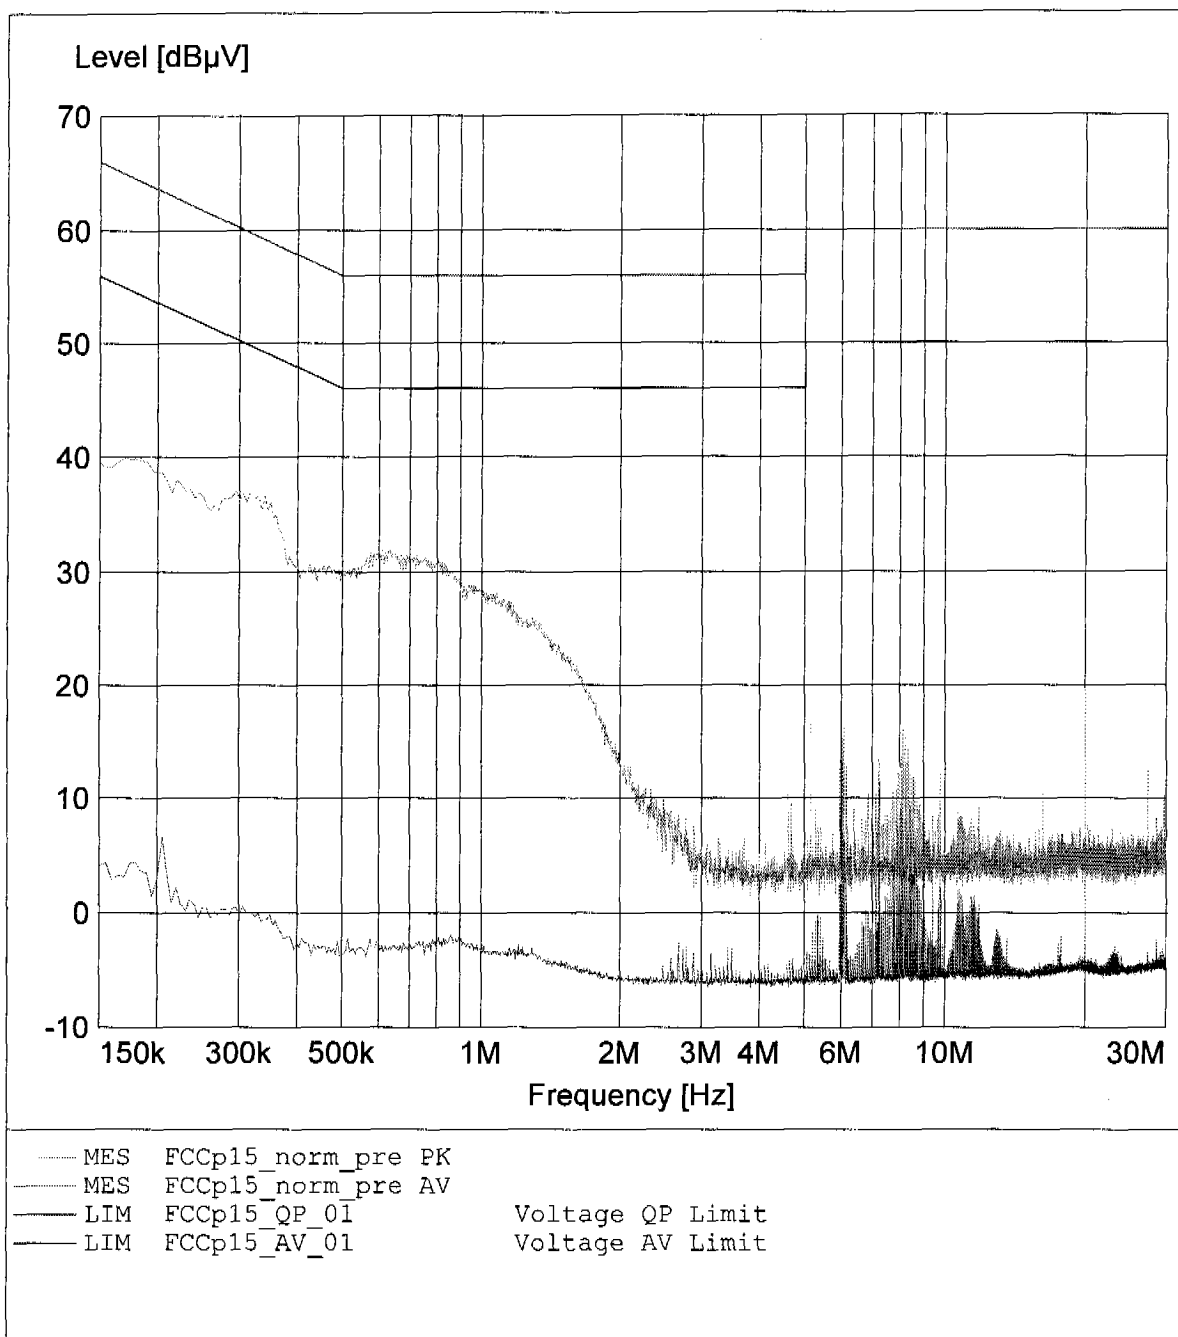

EMI voltage test in the ac-mains according to FCC part 15

EUT: Wireless connectivity box based on Bluetooth Technology
Manufacturer: GN Netcom as
Operating Condition: Unom: 120VAC, Tnom: 23°C
Test Site: ETS
Operator: Mr. Pflug
Test Specification: V-Network: ESH2-Z5 (L)
Comment: model: GN6110 mode: charging

