



**Spurious emissions Field Strength Tx**  
**FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 78  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S15247 / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq:197.615MHz Emax:32.99dBµV/m RBW: 100 kHz

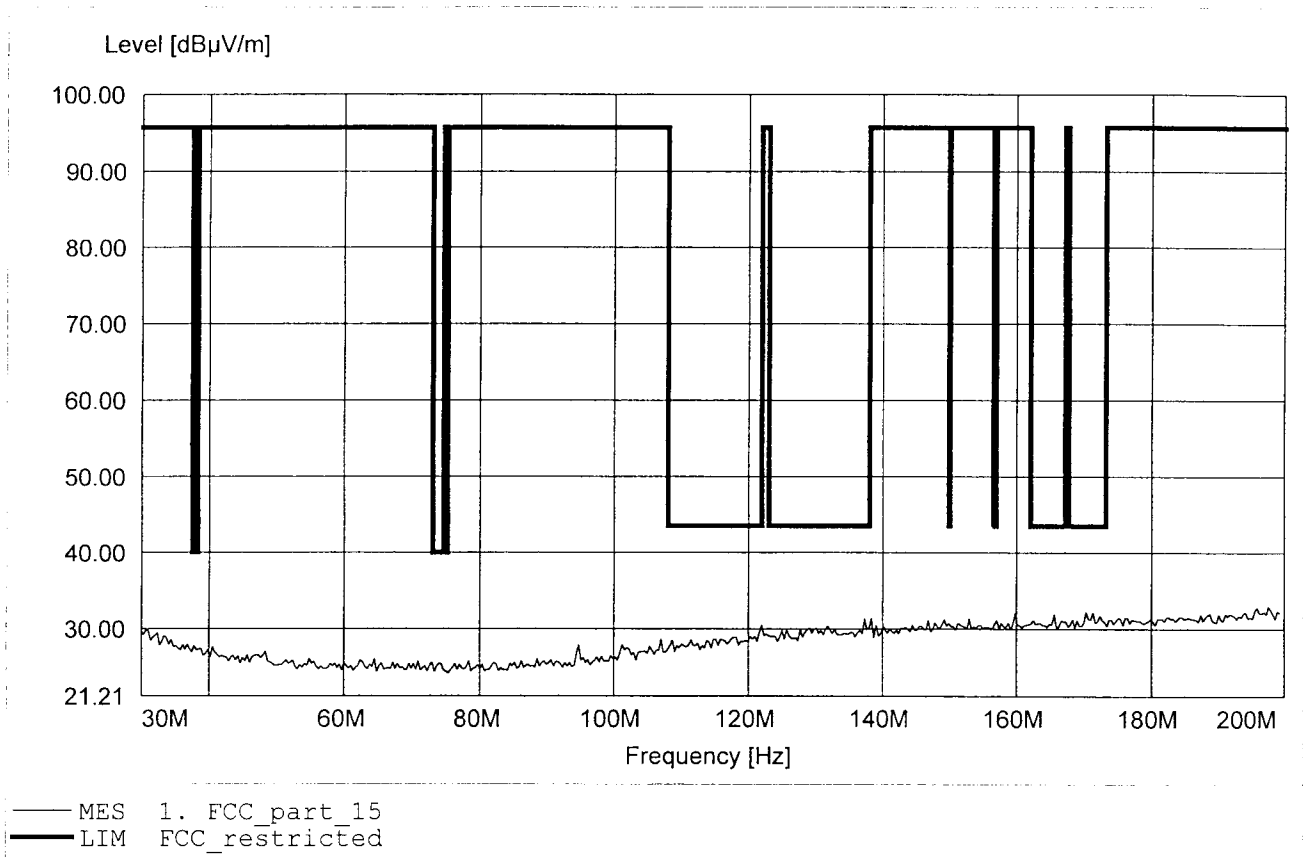


**Spurious emissions Field Strength Tx**  
**FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 78  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247 / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq:192.505MHz Emax:33.10dBµV/m RBW: 100 kHz

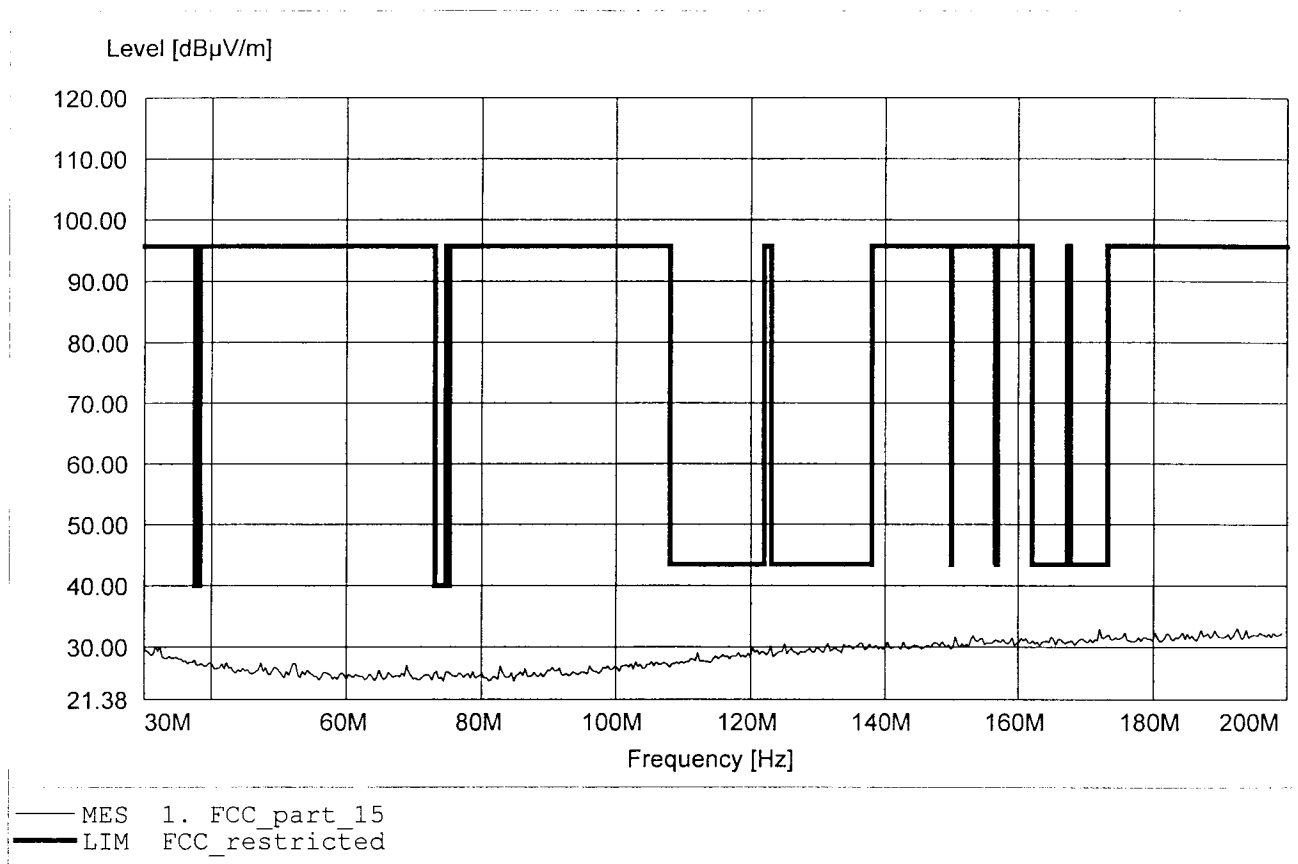


**Spurious emissions Field Strength Tx**  
**FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 78  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to §15247 / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Comment 2: Freq:688.978MHz Emax:26.97dBµV/m RBW: 100 kHz

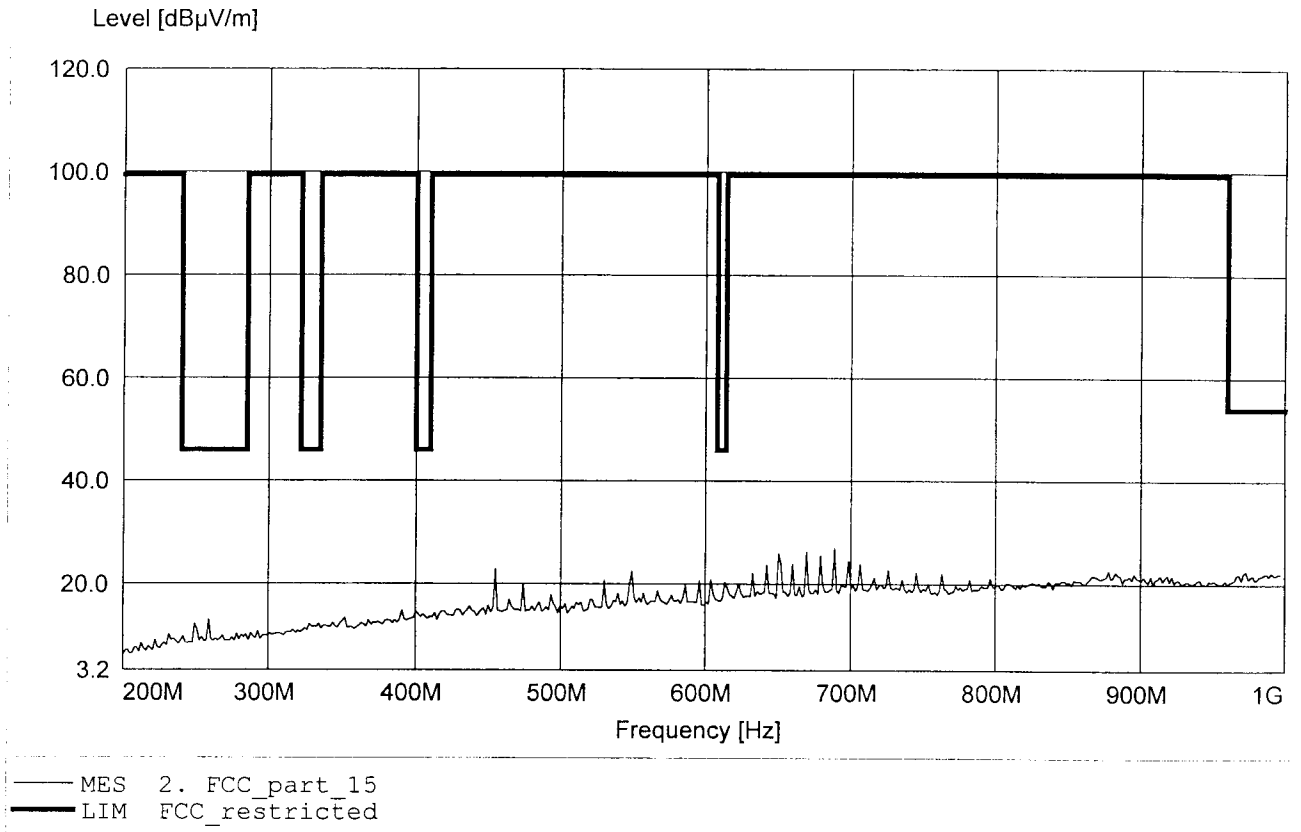


**Spurious emissions Field Strength Tx  
FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 78  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to S15247 / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Comment 2: Freq:669.739MHz Emax:26.85dBµV/m RBW: 100 kHz

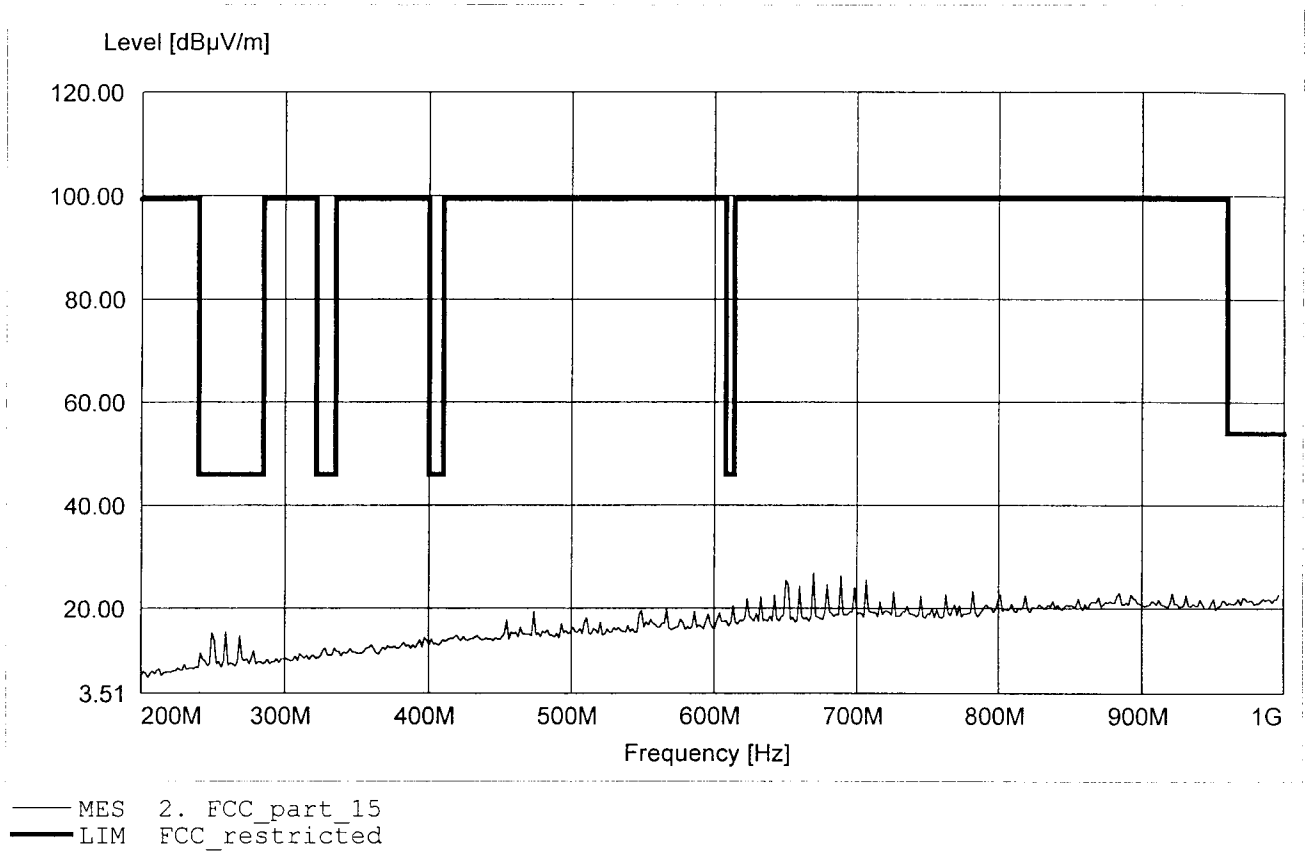


**Spurious emissions Field Strength Tx**  
**FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 78  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx  
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.  
Comment 2: Freq:2.483GHz Emax:62.25dBμV/m RBW: 1 MHz

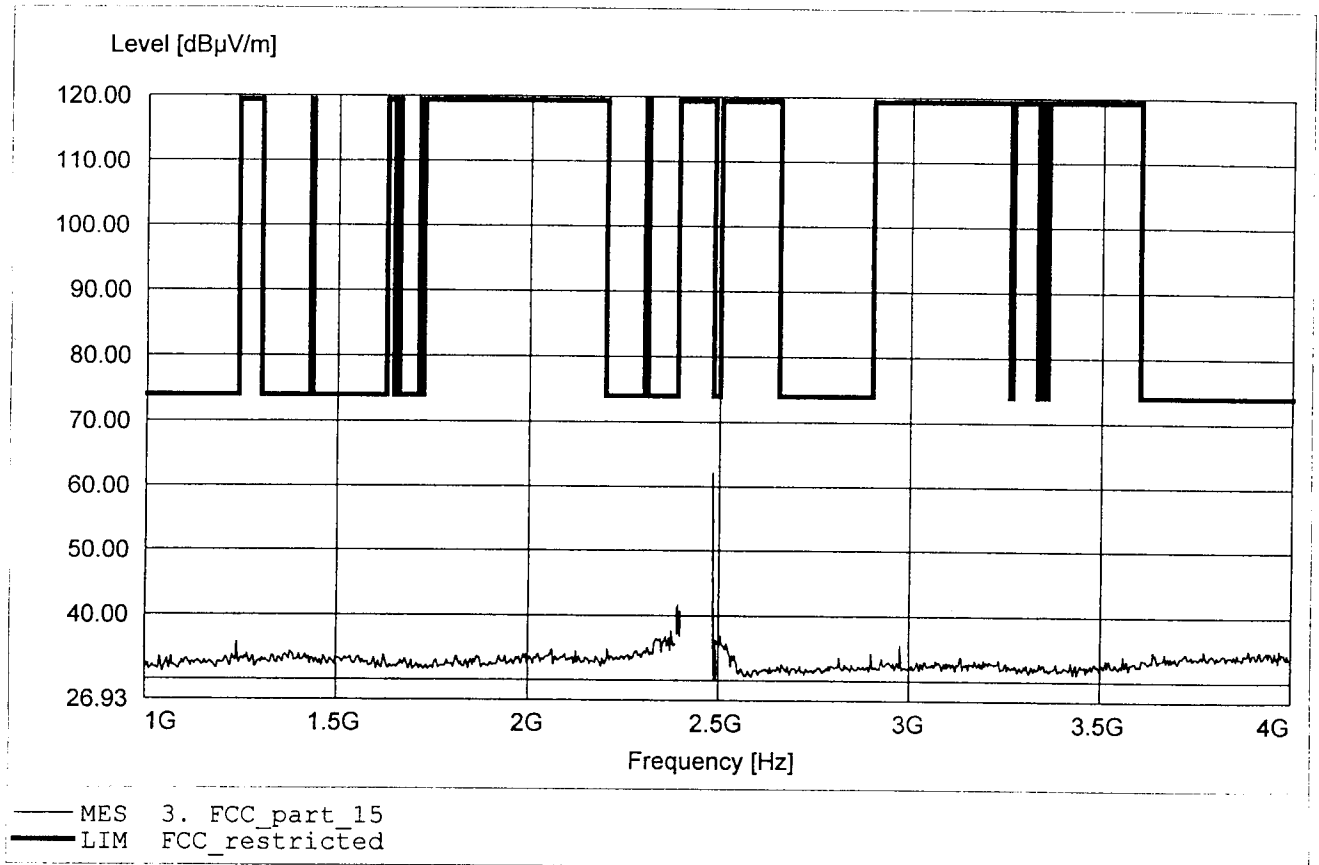


**Spurious emissions Field Strength Tx**  
**FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 78  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to §15247, Limit 20 dB up peak detector / mode: Tx  
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.  
Comment 2: Freq:2.483GHz Emax:73.11dBµV/m RBW: 1 MHz

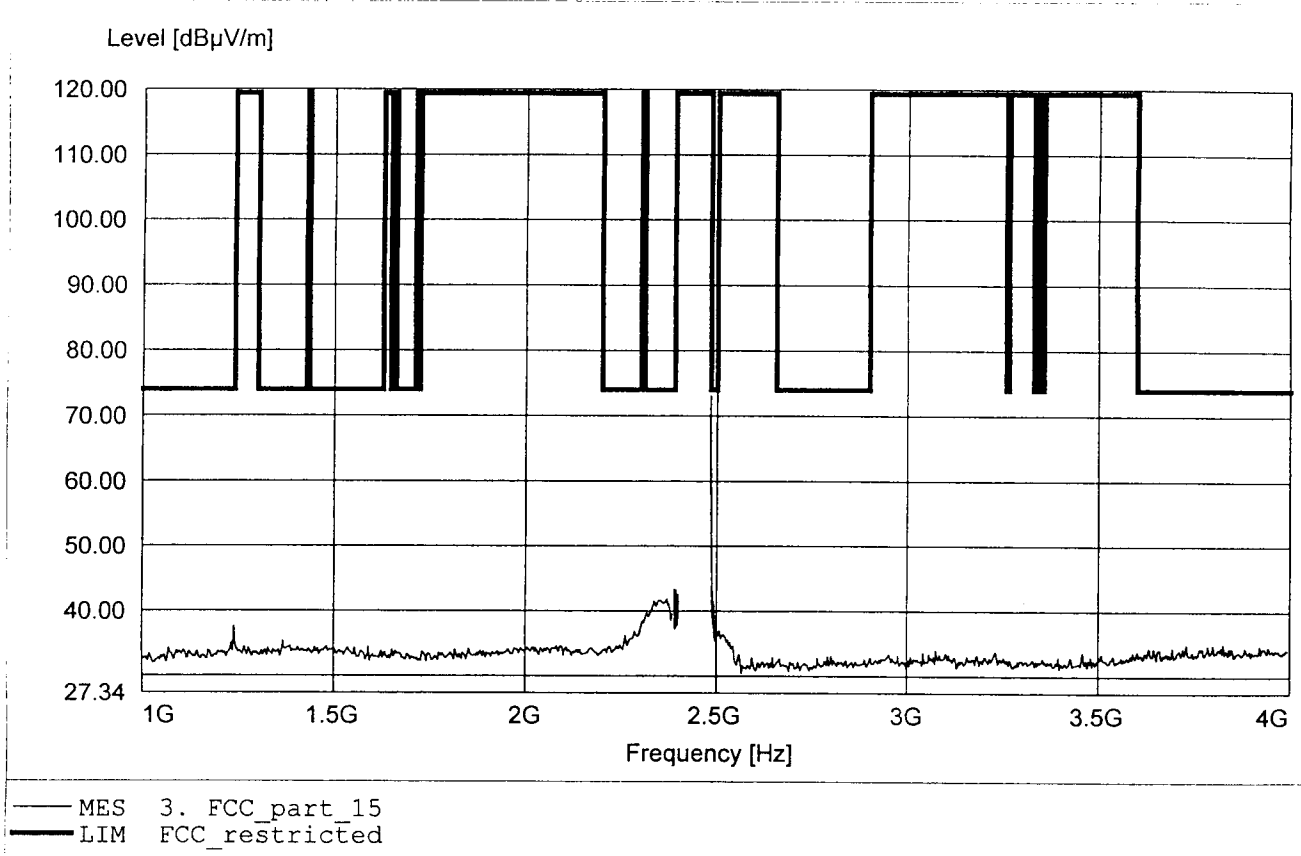


**Spurious emissions Field Strength Tx**  
**FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 78  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx  
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.  
Comment 2: Freq:4.962GHz Emax:52.43dBµV/m RBW: 1 MHz

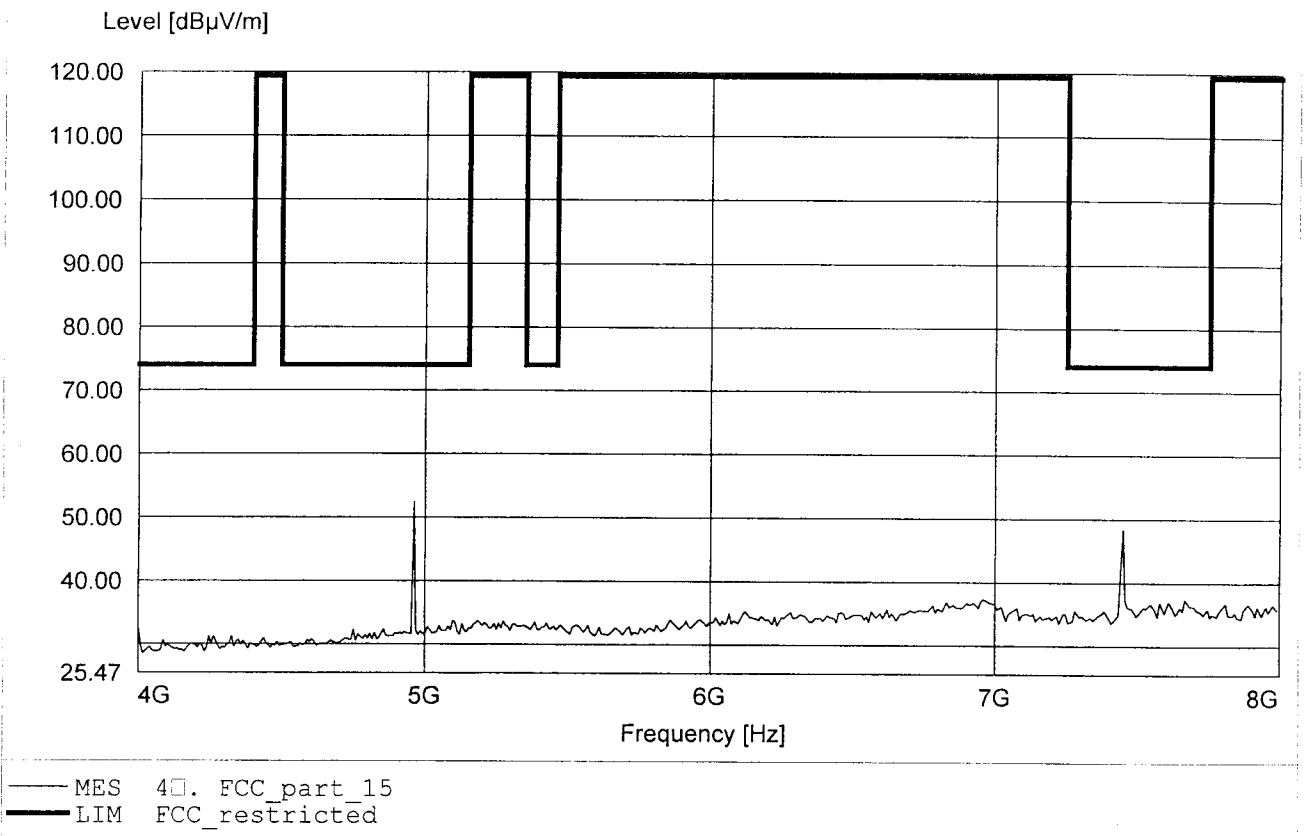

**Spurious emissions Field Strength Tx**  
**FCC RULES PART 15, SUBPART C**


EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 78  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx  
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.  
Comment 2: Freq:4.962GHz Emax:64.42dBµV/m RBW: 1 MHz

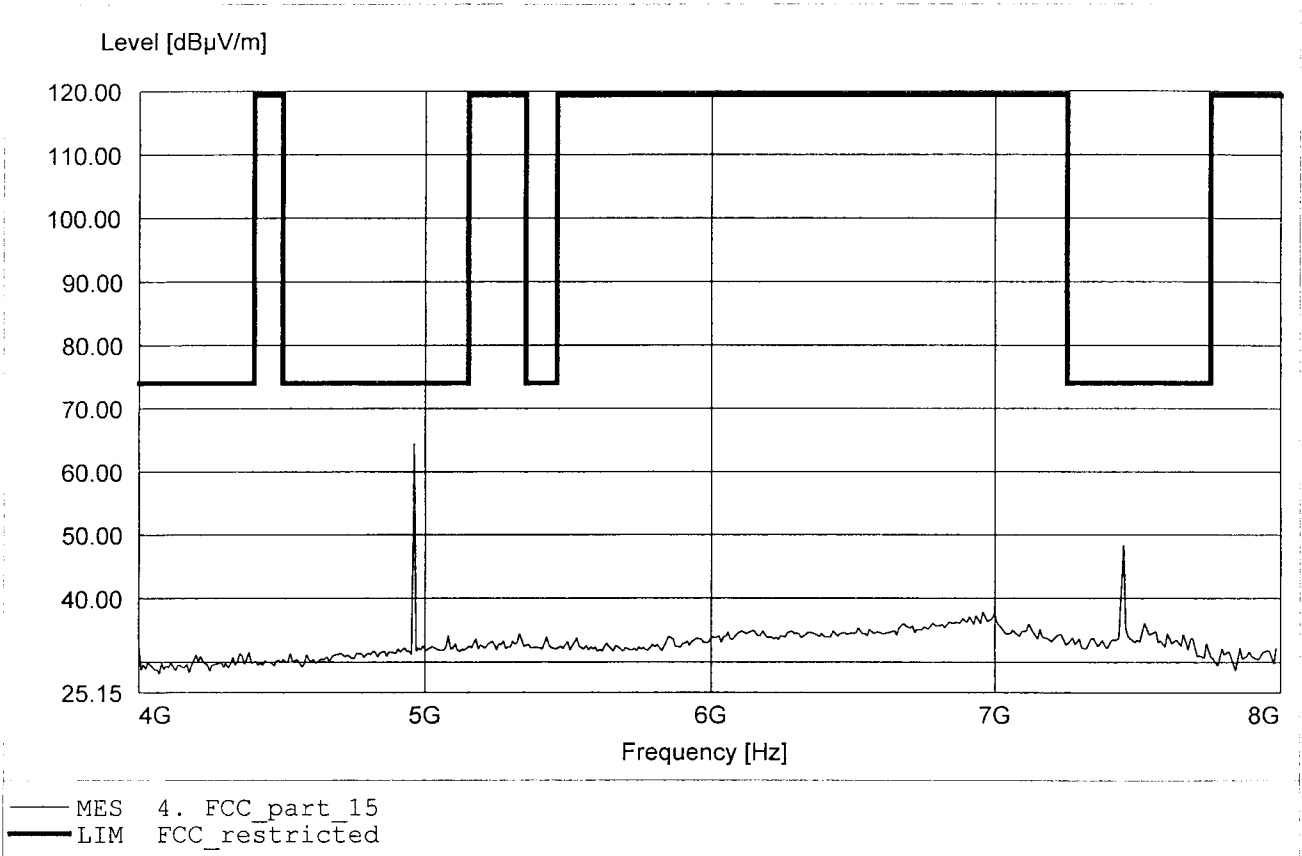




**Spurious emissions Field Strength Tx**  
**FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 78  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx  
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.  
Comment 2: Freq:11.126GHz Emax:43.09dBμV/m RBW: 1 MHz

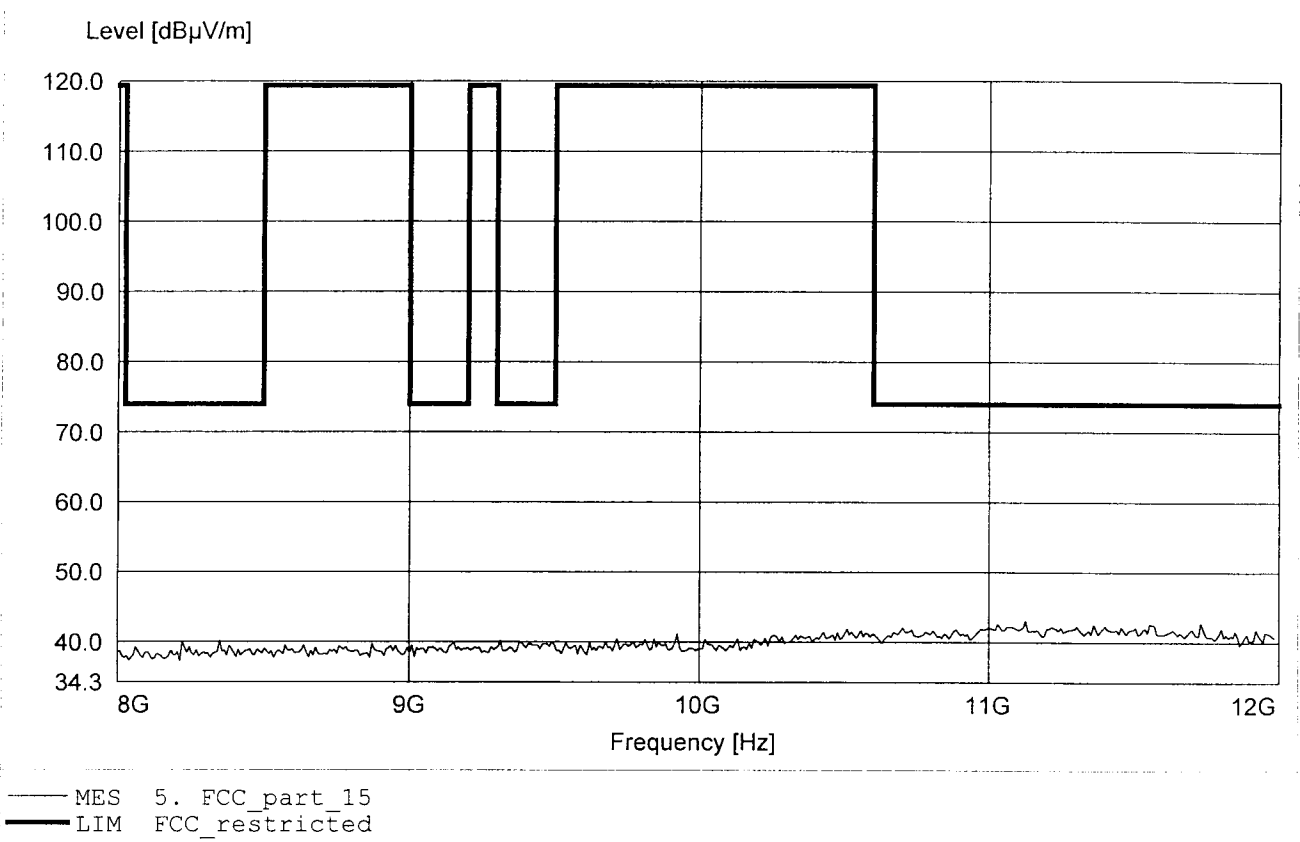

**Spurious emissions Field Strength Tx  
FCC RULES PART 15, SUBPART C**


EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 78  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx  
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.  
Comment 2: Freq:11.735GHz Emax:42.83dBuV/m RBW: 1 MHz

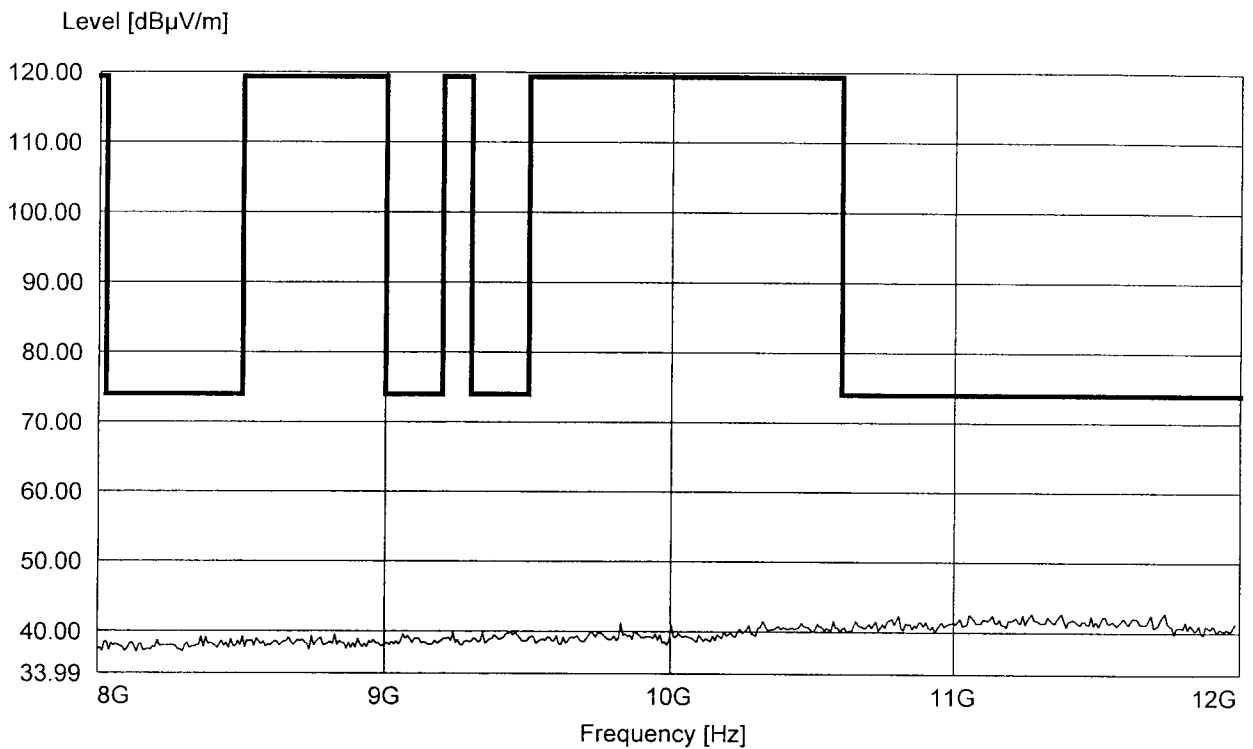

— MES 50. FCC\_part\_15  
— LIM FCC\_restricted


**Spurious emissions Field Strength Tx  
FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 78  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to §15247, Limit 20 dB up peak detector / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq:14.575GHz Emax:45.39dBμV/m RBW: 1 MHz

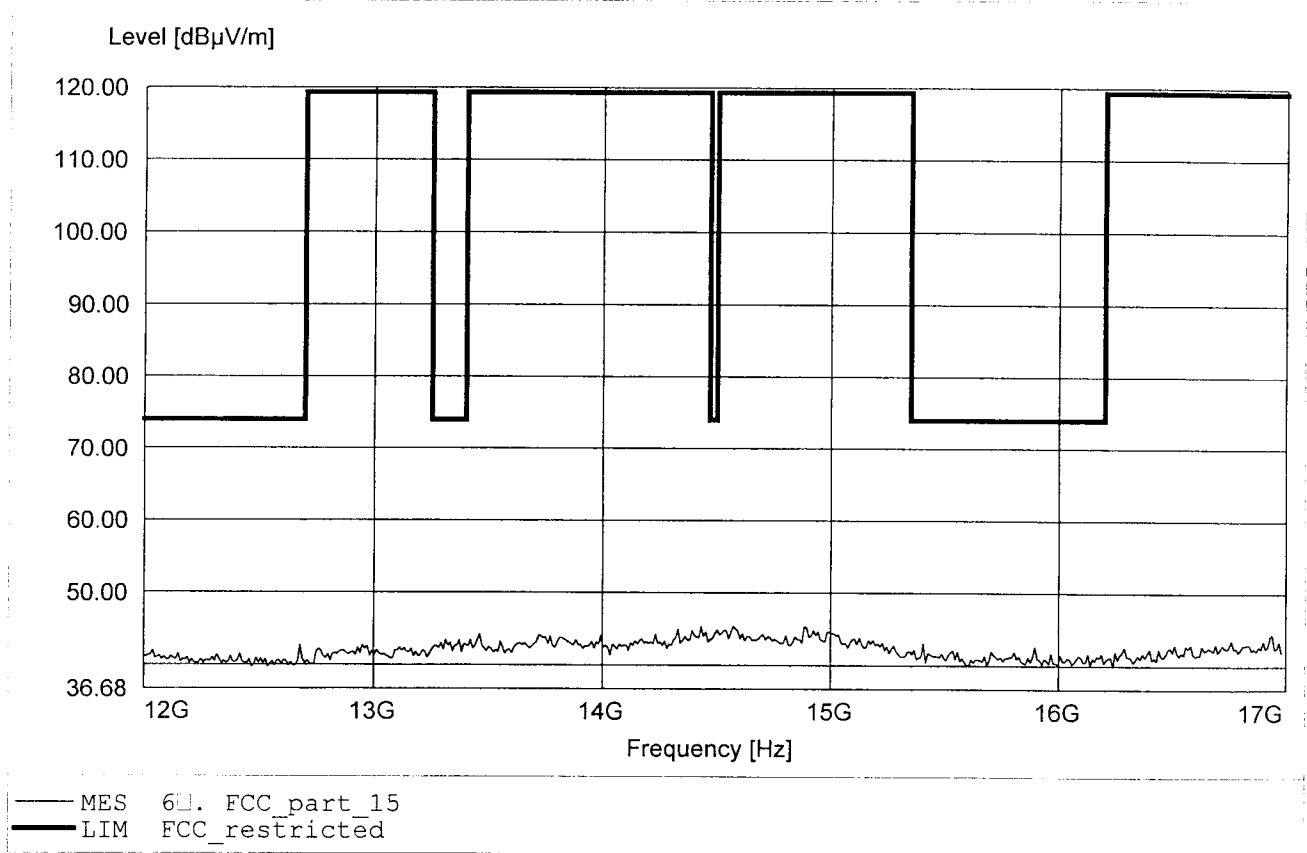


**Spurious emissions Field Strength Tx**  
**FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 78  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq:14.886GHz Emax:56.84dBµV/m RBW: 1 MHz

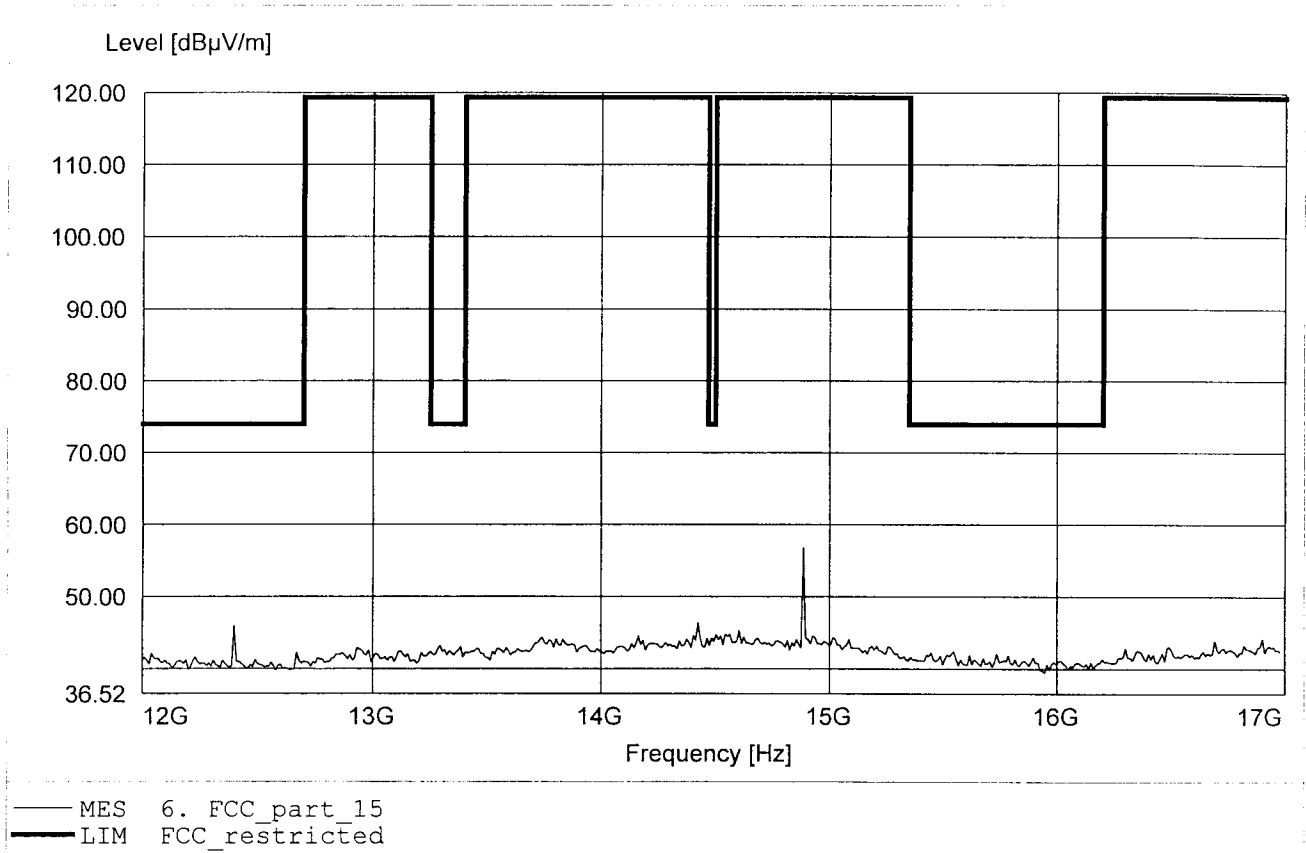


**Spurious emissions Field Strength Tx**  
**FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 78  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq:26.024GHz Emax:49.94dBuV/m RBW: 1 MHz

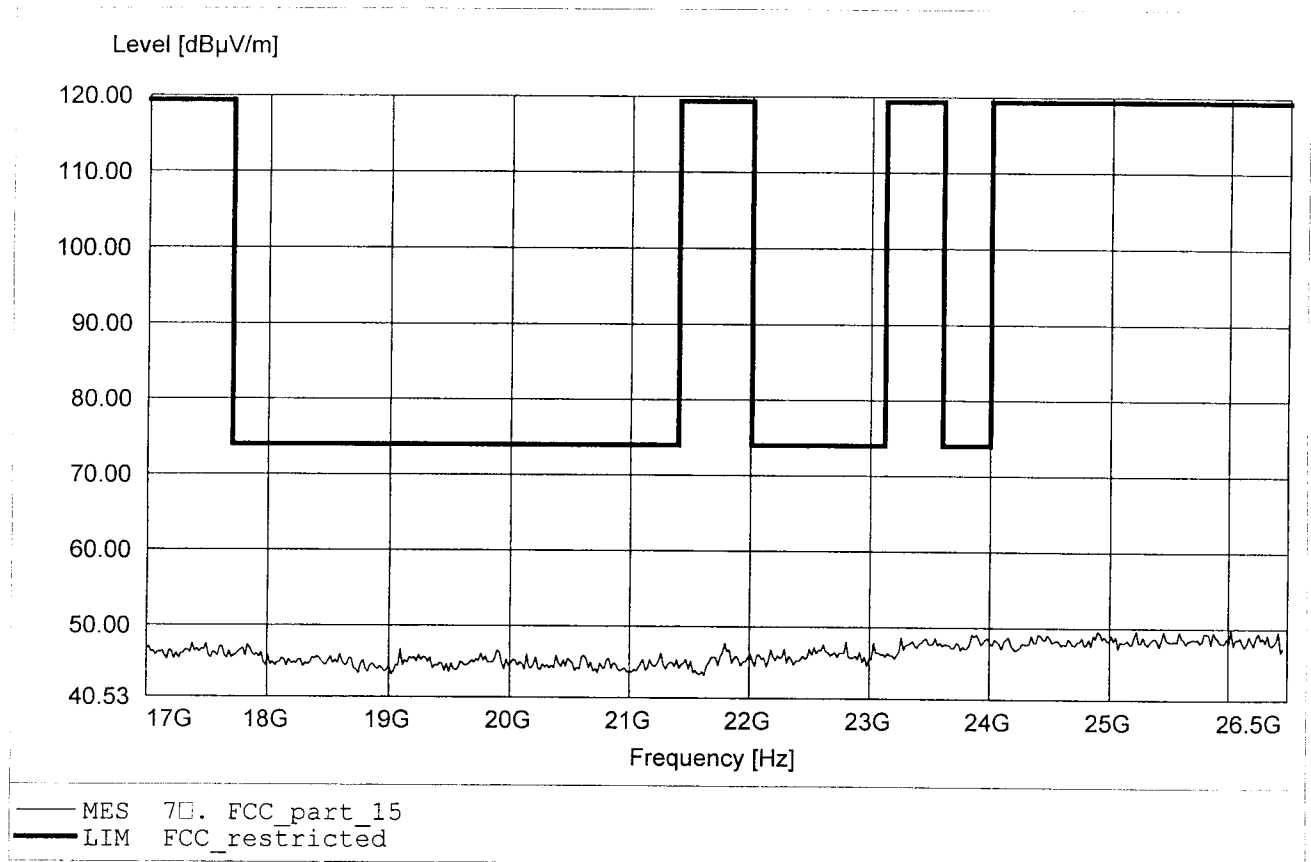


**Spurious emissions Field Strength Tx**  
**FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 78  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq:25.358GHz Emax:50.60dBuV/m RBW: 1 MHz

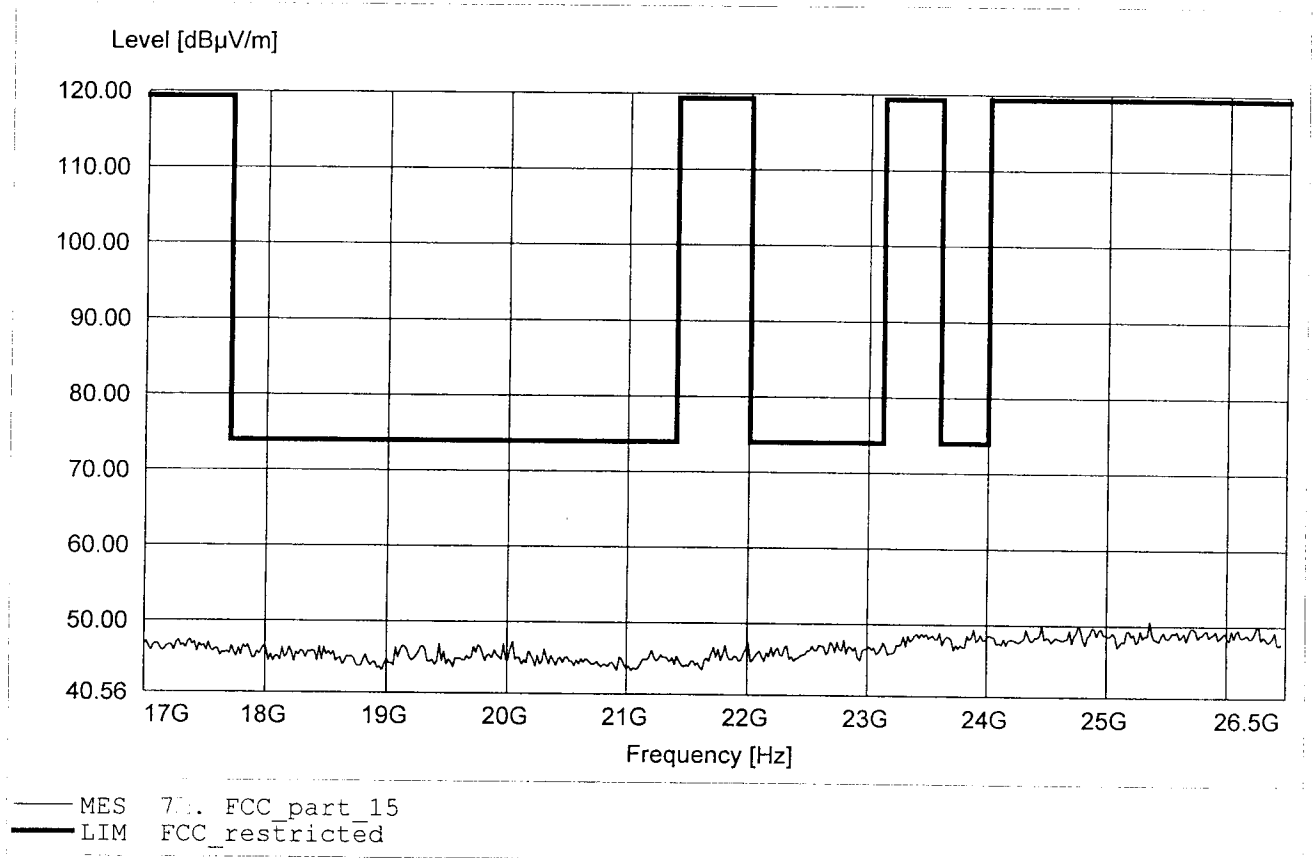


**Spurious emissions Field Strength Tx  
FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 0  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S15247 / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq:198.297MHz Emax:33.17dBμV/m RBW: 100 kHz

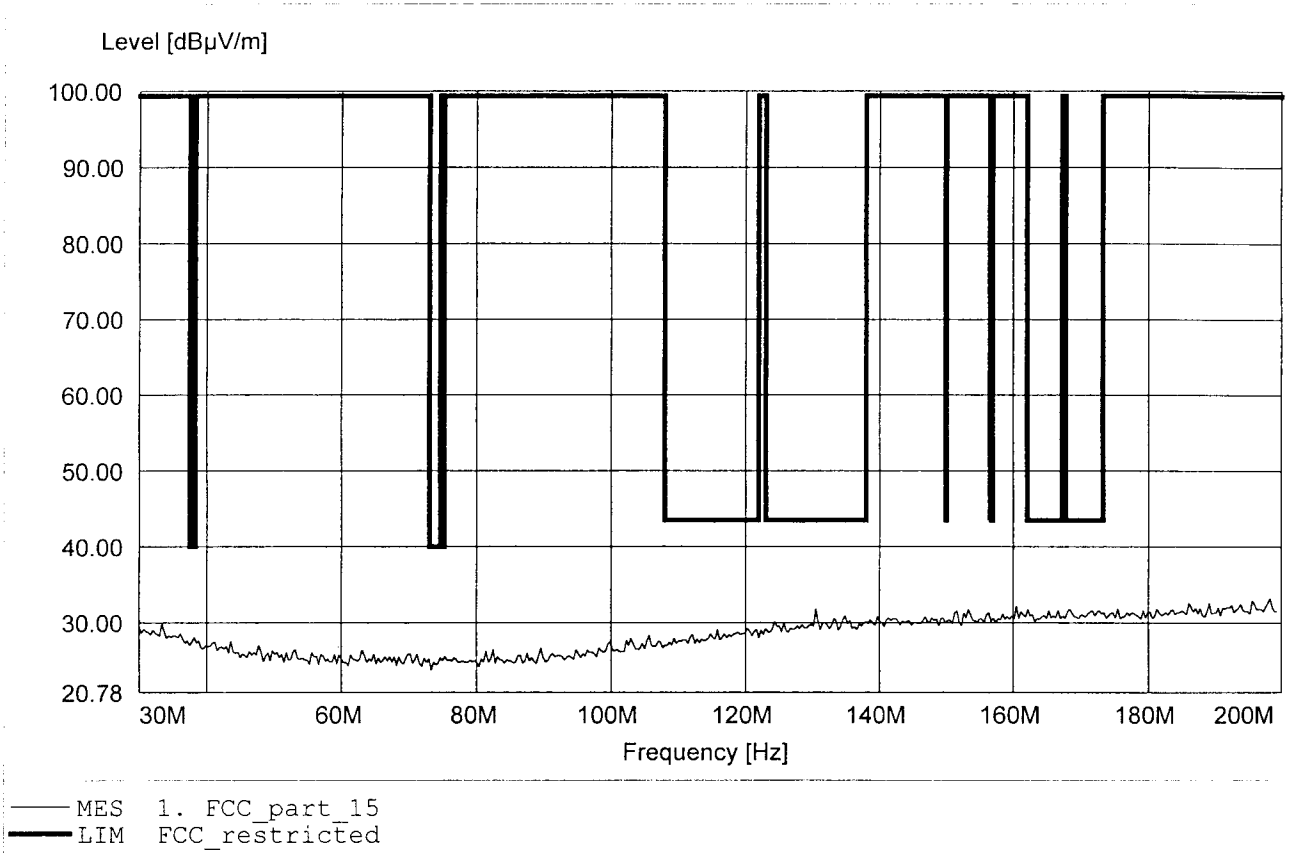

**Spurious emissions Field Strength Tx**  
**FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 0  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S15247 / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq:193.527MHz Emax:32.60dBμV/m RBW: 100 kHz

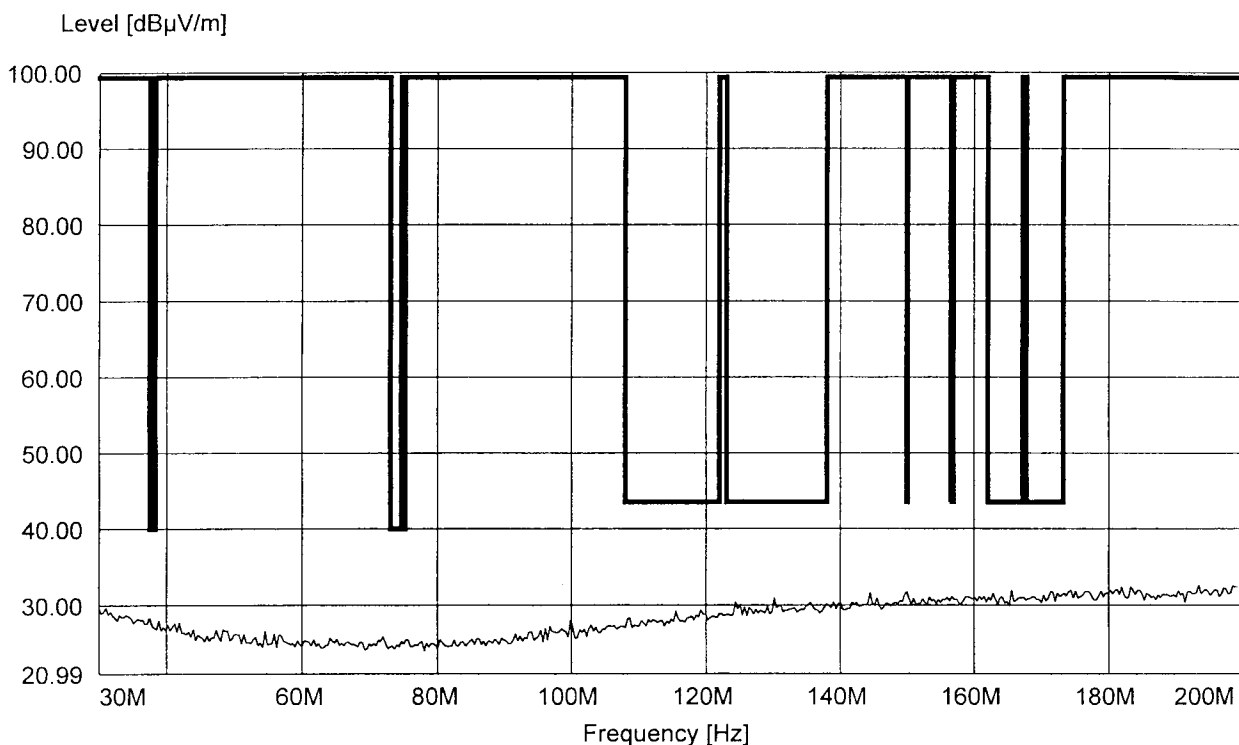


— MES 1. FCC\_part\_15  
— LIM FCC\_restricted




**Spurious emissions Field Strength Tx**  
**FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 0  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to S15247 / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Comment 2: Freq:688.978MHz Emax:27.26dBµV/m RBW: 100 kHz

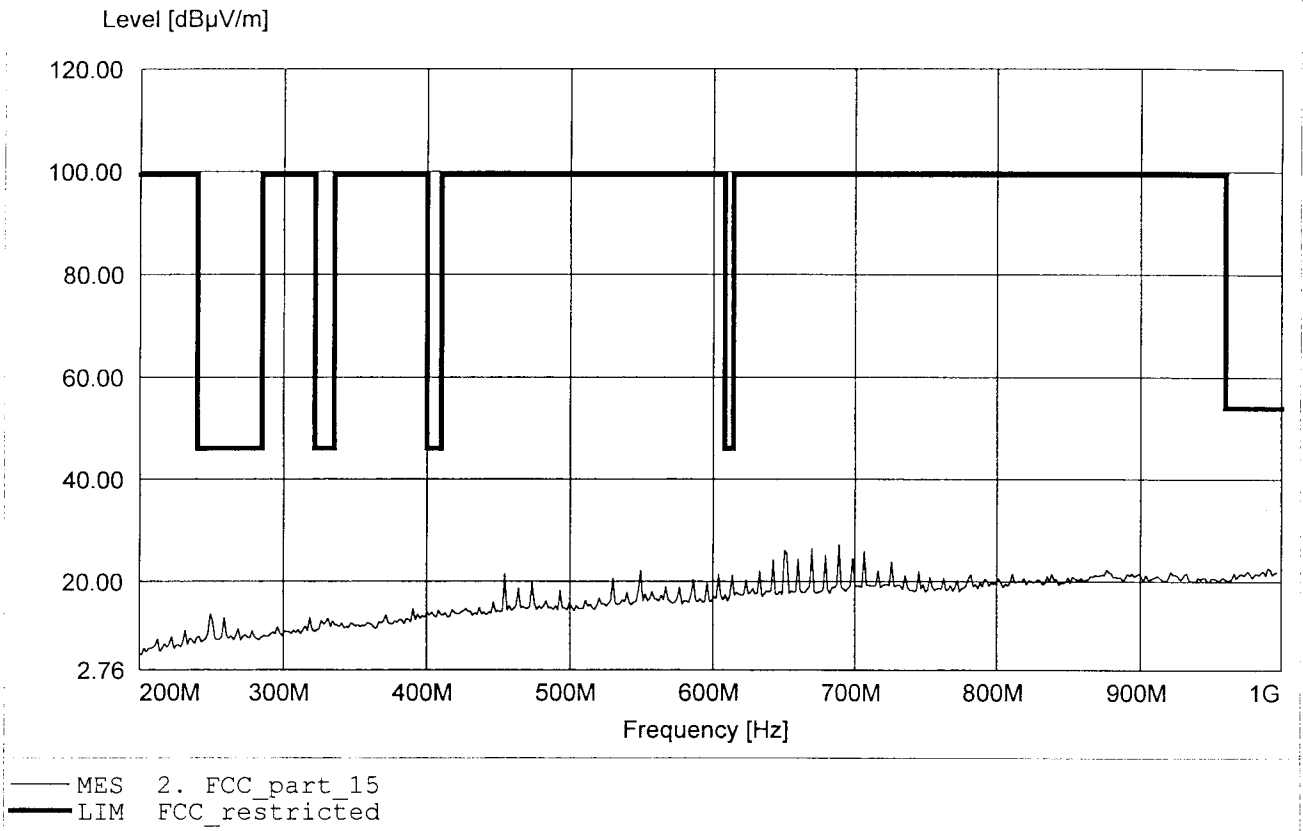


**Spurious emissions Field Strength Tx  
FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 0  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to S15247 / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Comment 2: Freq:669.739MHz Emax:27.38dBµV/m RBW: 100 kHz

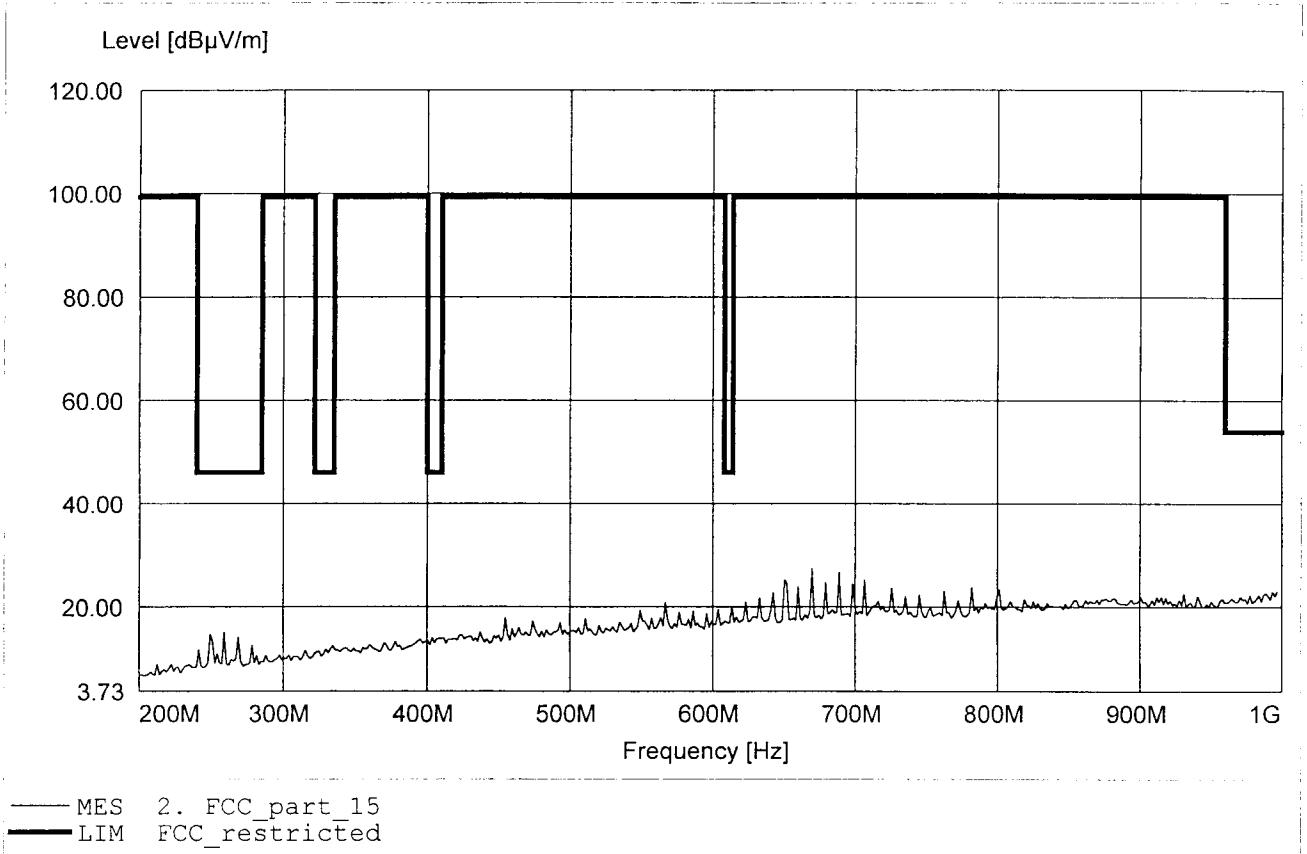


**Spurious emissions Field Strength Tx  
FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 0  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to §15247, Limit 20 dB up peak detector / mode: Tx  
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.  
Comment 2: Freq:2.400GHz Emax:65.08dBuV/m RBW: 1 MHz

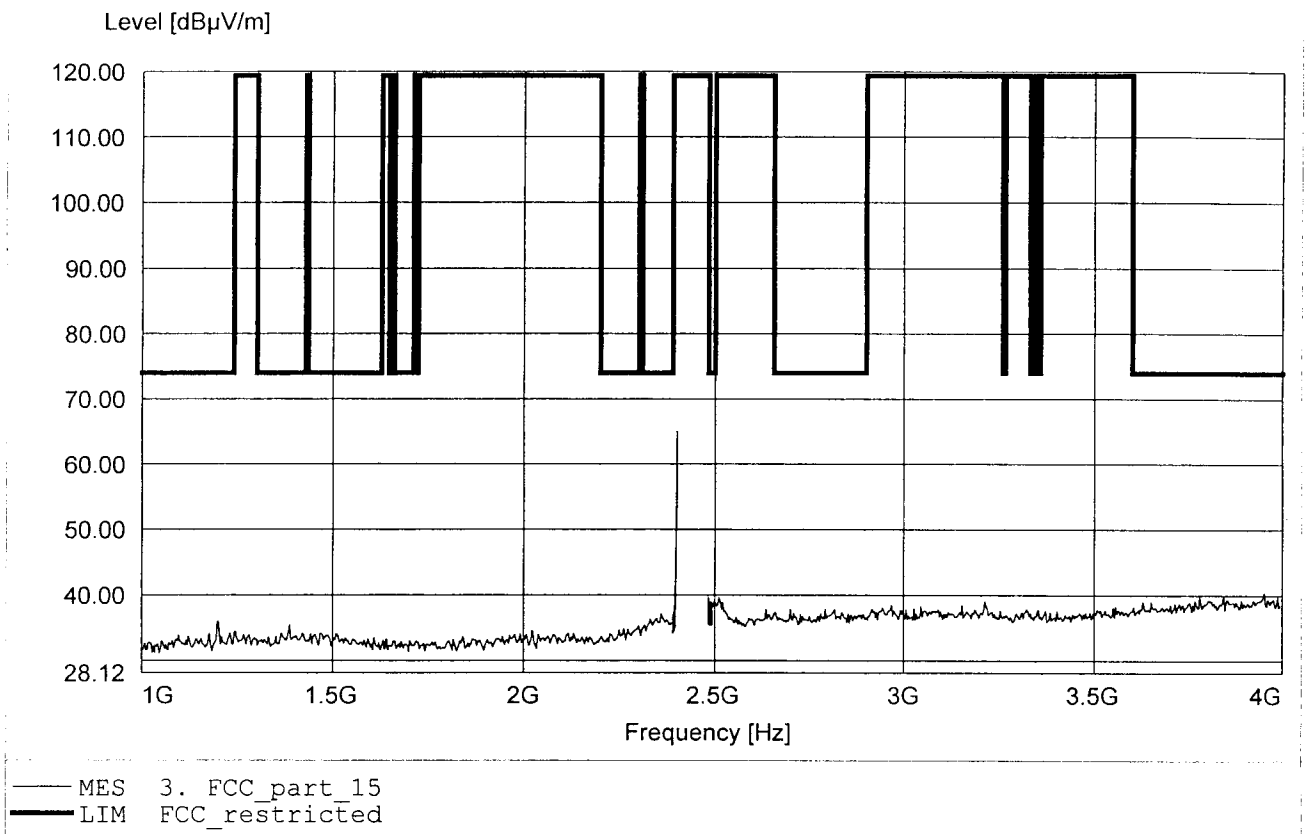


**Spurious emissions Field Strength Tx**  
**FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 0  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx  
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.  
Comment 2: Freq:2.400GHz Emax:61.71dBµV/m RBW: 1 MHz

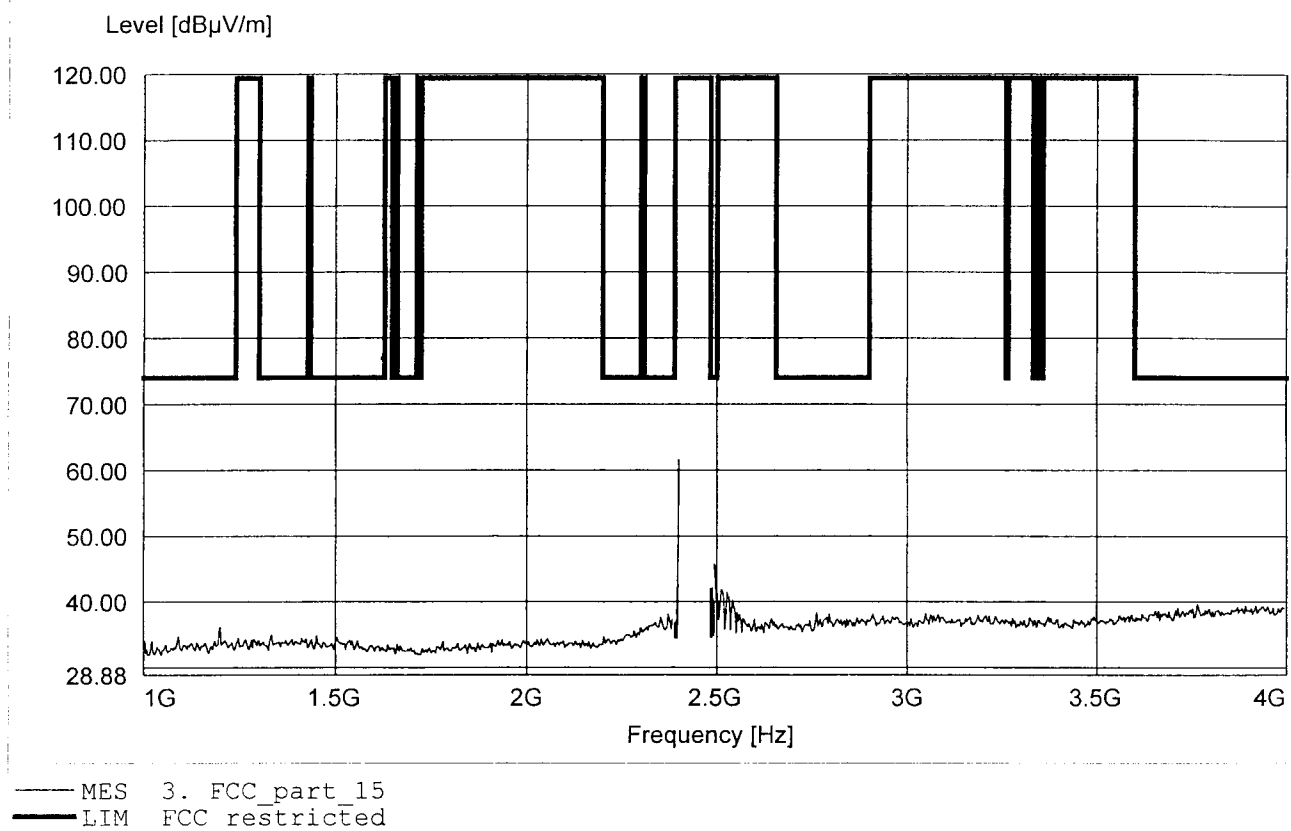


**Spurious emissions Field Strength Tx**  
**FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 0  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx  
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.  
Comment 2: Freq:7.206GHz Emax:48.29dBuV/m RBW: 1 MHz

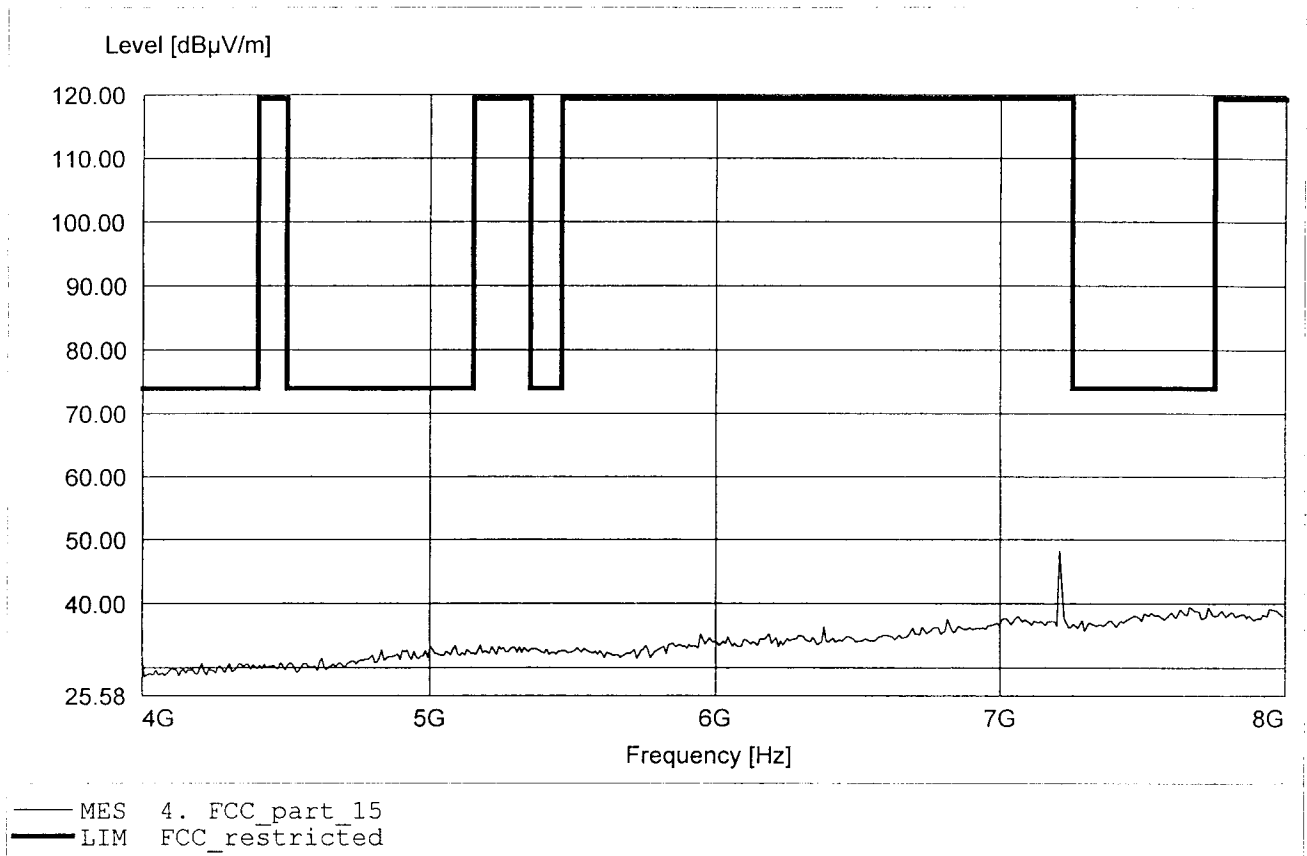


**Spurious emissions Field Strength Tx  
FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 0  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx  
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.  
Comment 2: Freq:7.206GHz Emax:62.12dBµV/m RBW: 1 MHz

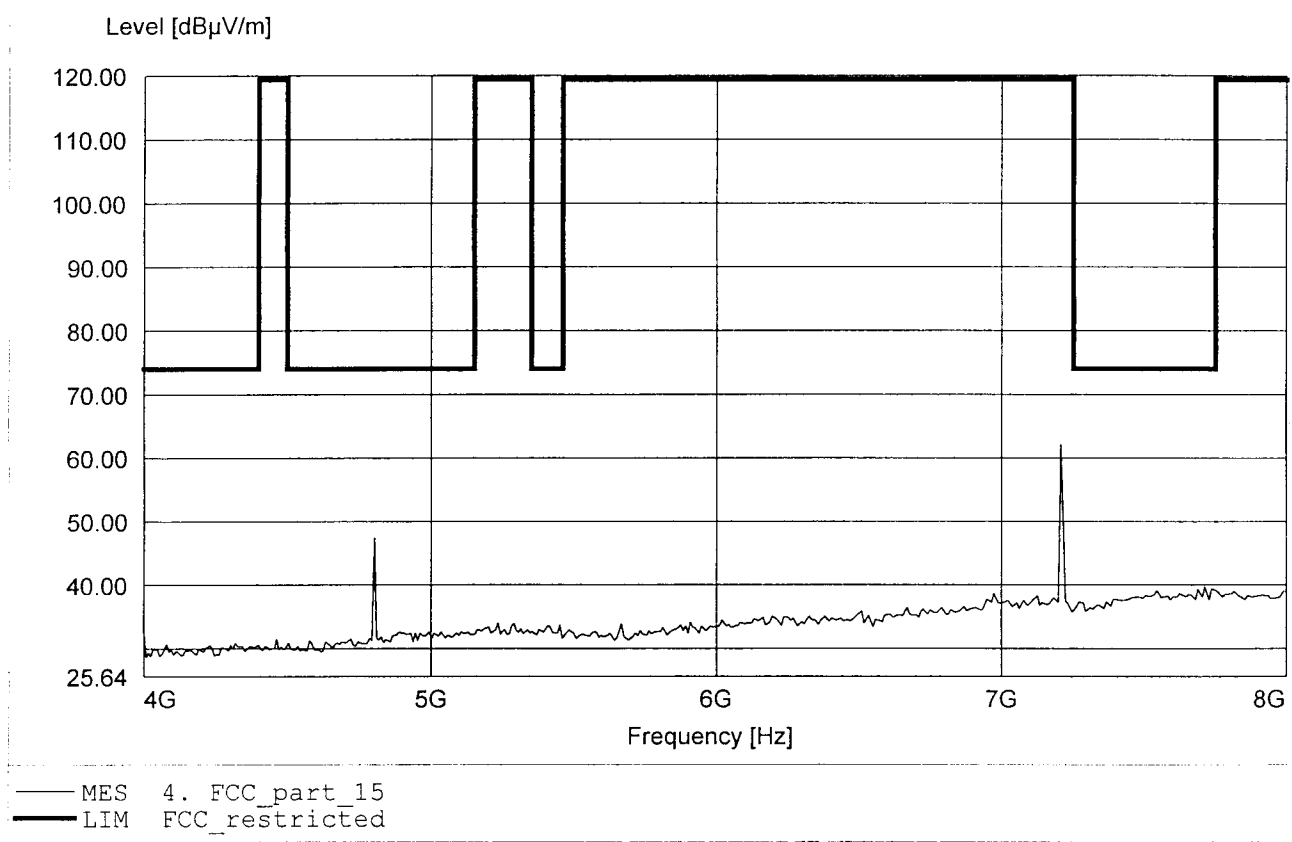


**Spurious emissions Field Strength Tx**  
**FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 0  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx  
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.  
Comment 2: Freq:11.727GHz Emax:42.78dBuV/m RBW: 1 MHz

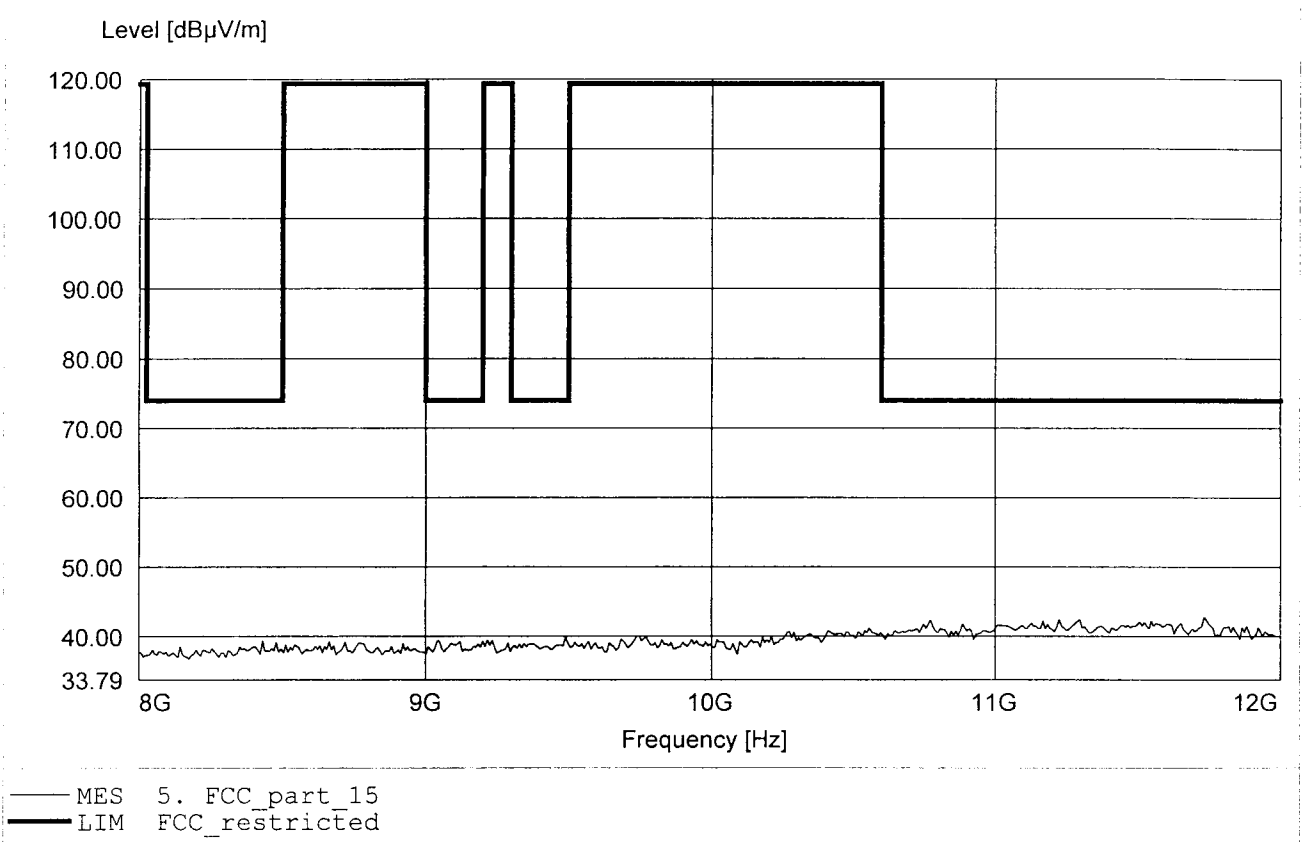

**Spurious emissions Field Strength Tx  
FCC RULES PART 15, SUBPART C**


EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 0  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx  
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.  
Comment 2: Freq:11.567GHz Emax:43.57dBuV/m RBW: 1 MHz

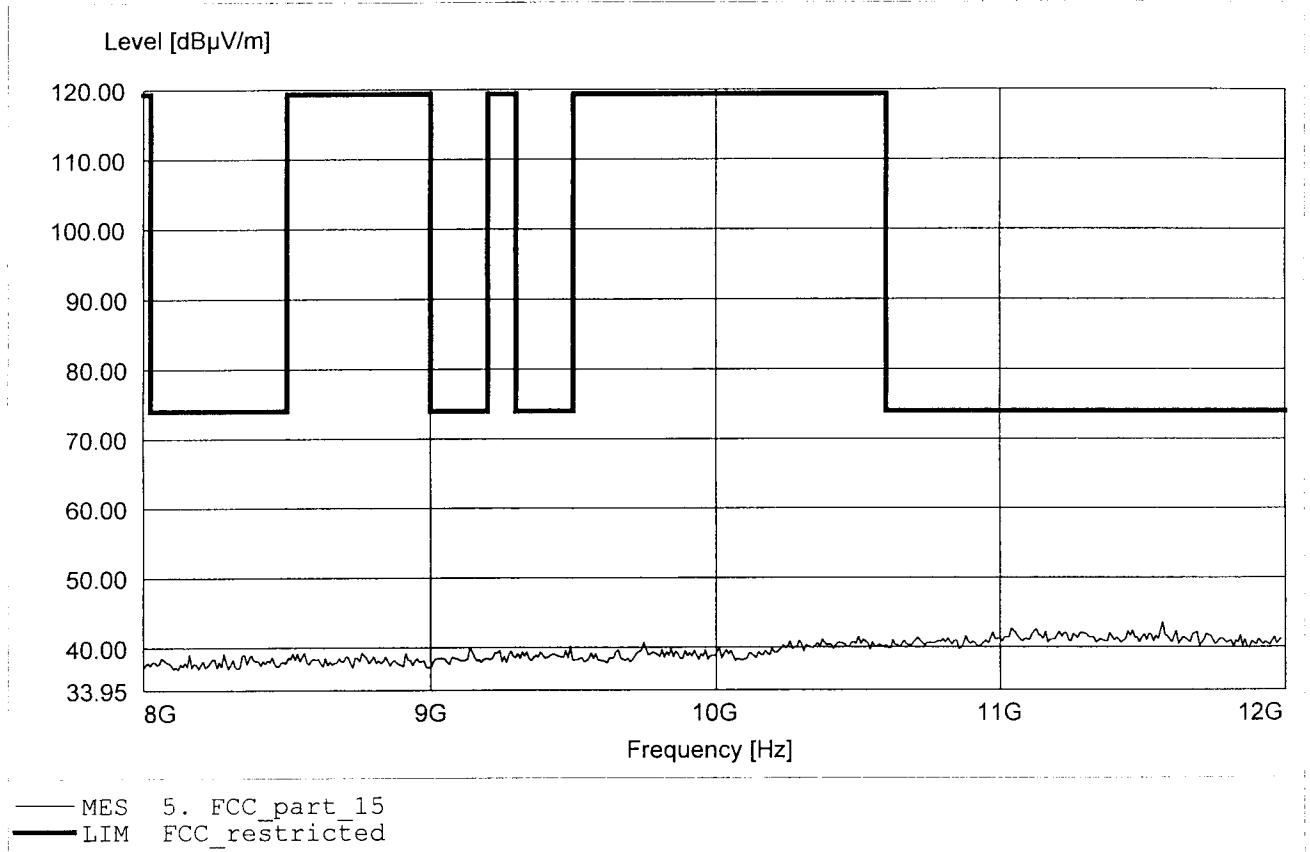




**Spurious emissions Field Strength Tx**  
**FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 0  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq:14.405GHz Emax:48.61dBuV/m RBW: 1 MHz

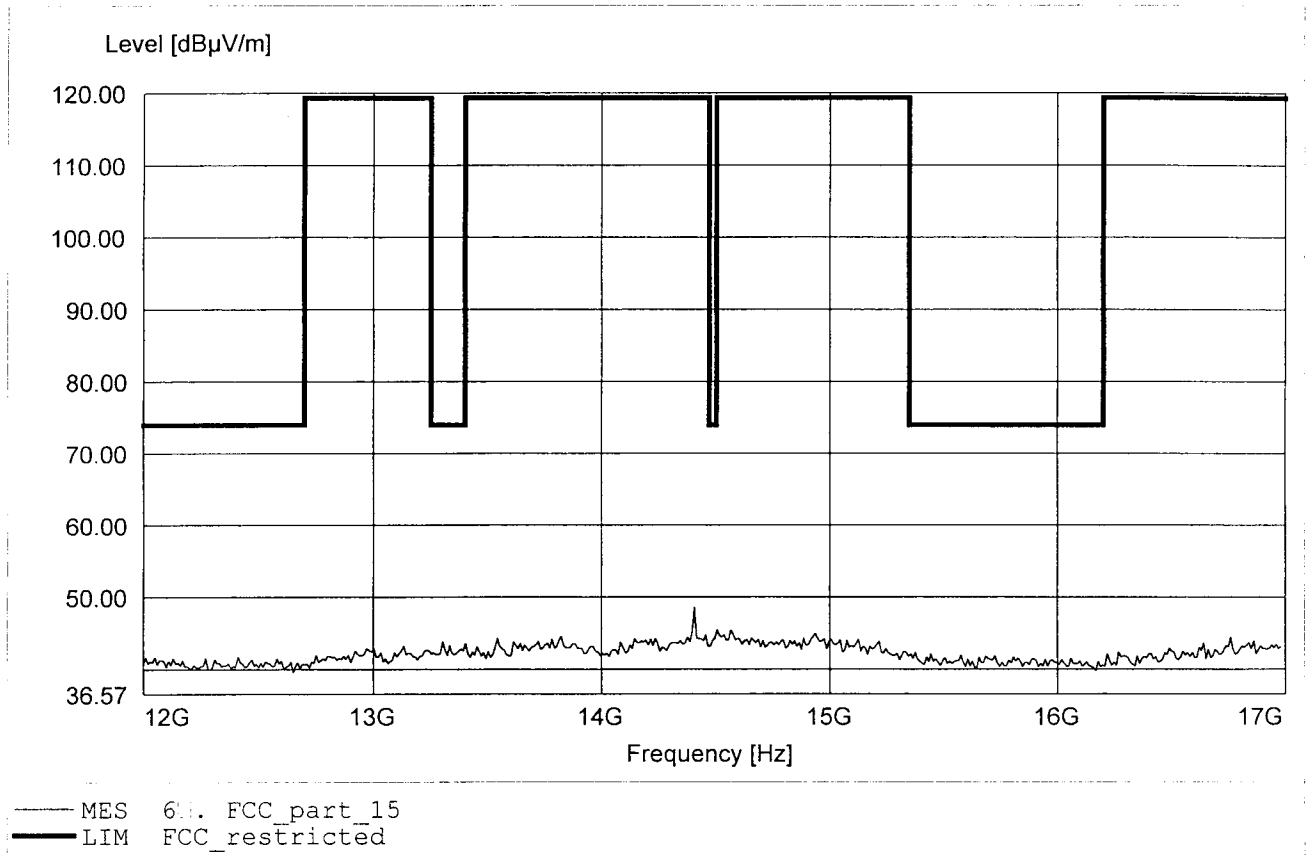


**Spurious emissions Field Strength Tx**  
**FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 0  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq:14.405GHz Emax:51.22dBµV/m RBW: 1 MHz

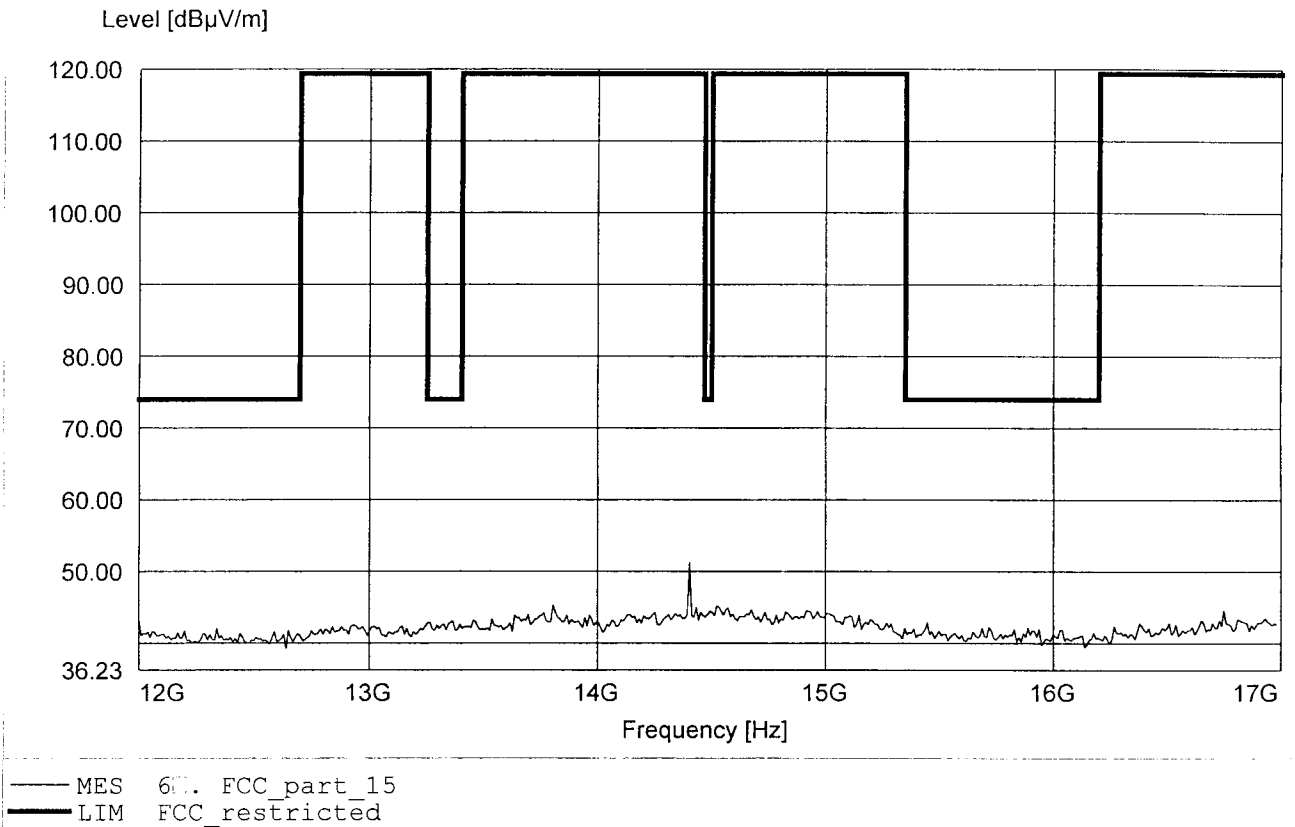


**Spurious emissions Field Strength Tx  
FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 0  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq:24.177GHz Emax:49.82dBµV/m RBW: 1 MHz

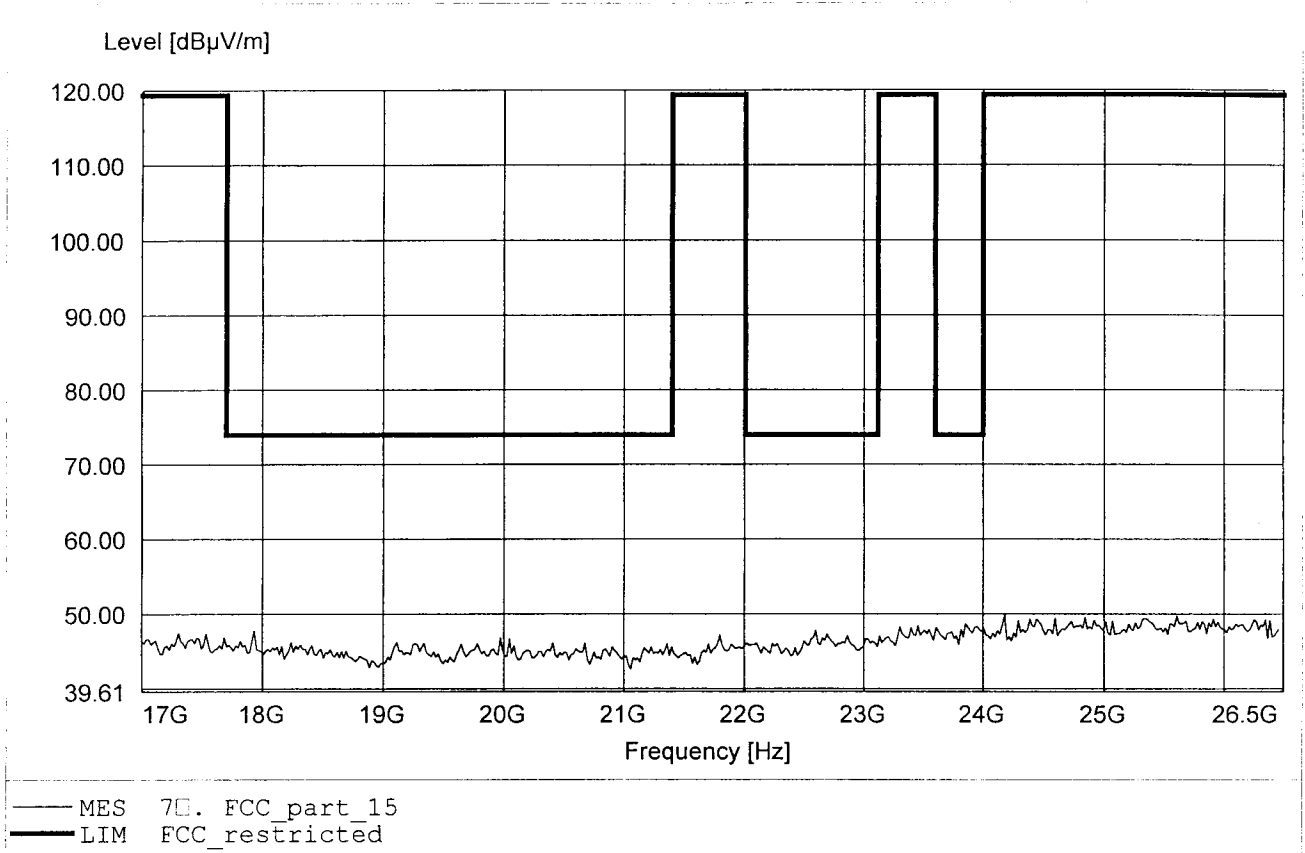


**Spurious emissions Field Strength Tx**  
**FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 0  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to §15247, Limit 20 dB up peak detector / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq:24.901GHz Emax:50.46dBuV/m RBW: 1 MHz

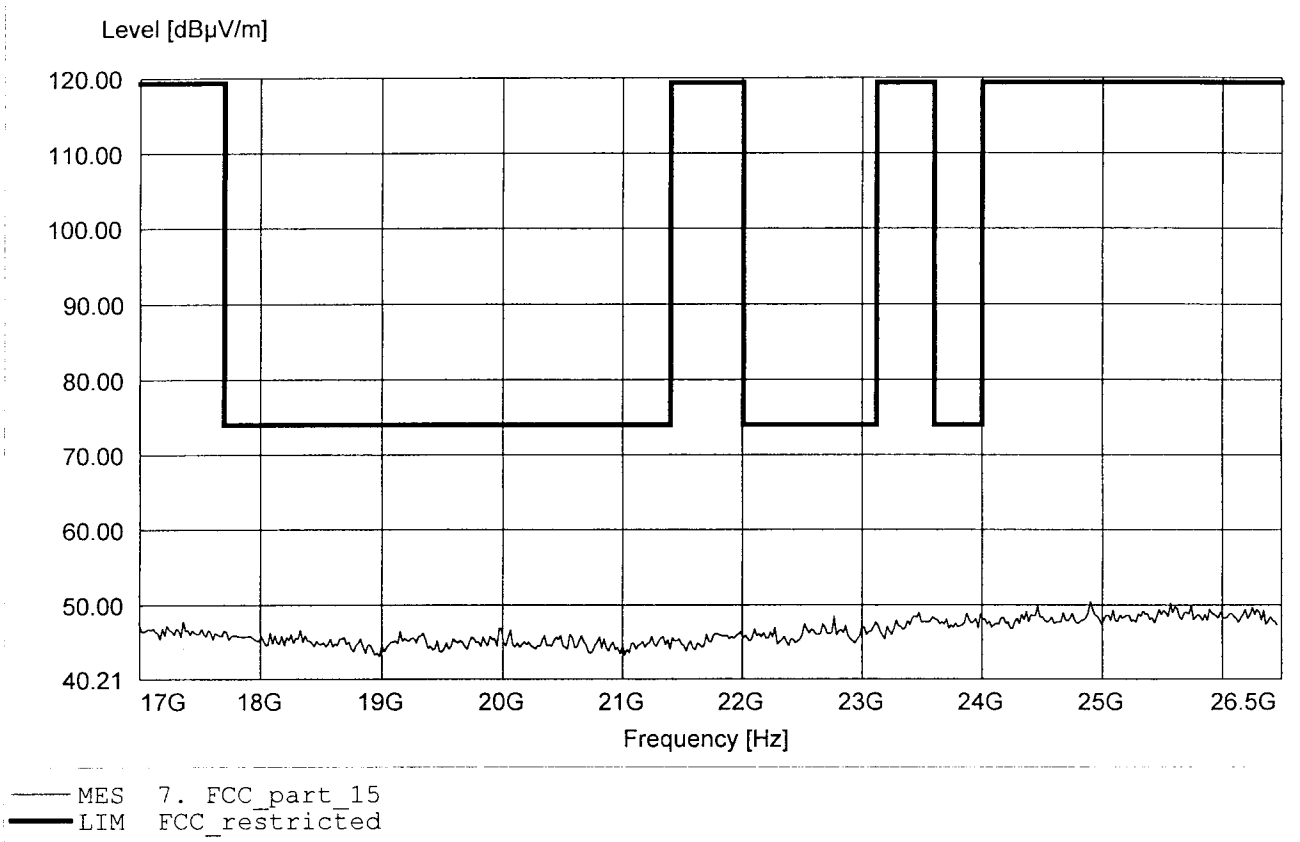


**Spurious emissions Field Strength Tx**  
**FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 40  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15247 / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq:165.932MHz Emax:32.71dBµV/m RBW: 100 kHz

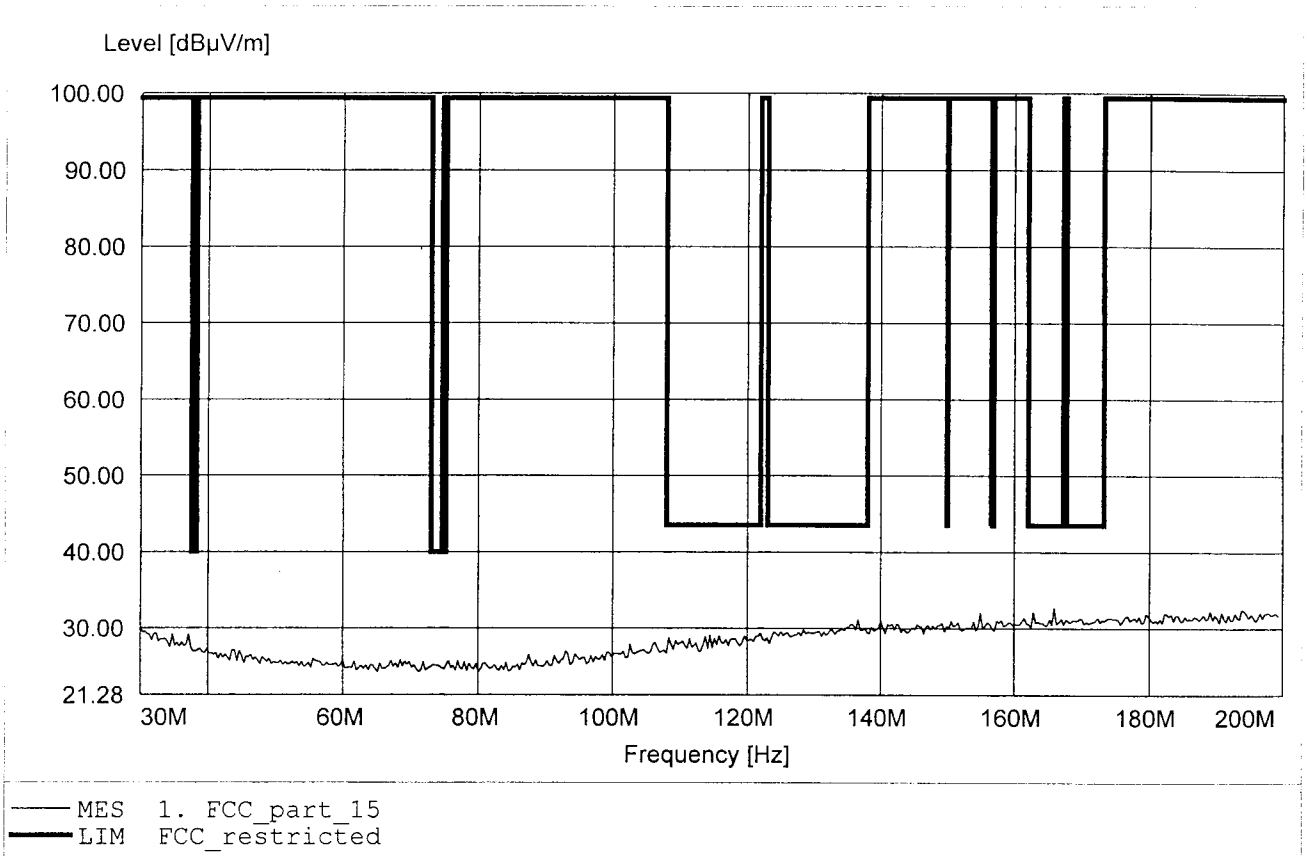

**Spurious emissions Field Strength Tx  
FCC RULES PART 15, SUBPART C**


EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 40  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15247 / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq:183.988MHz Emax:33.11dBuV/m RBW: 100 kHz

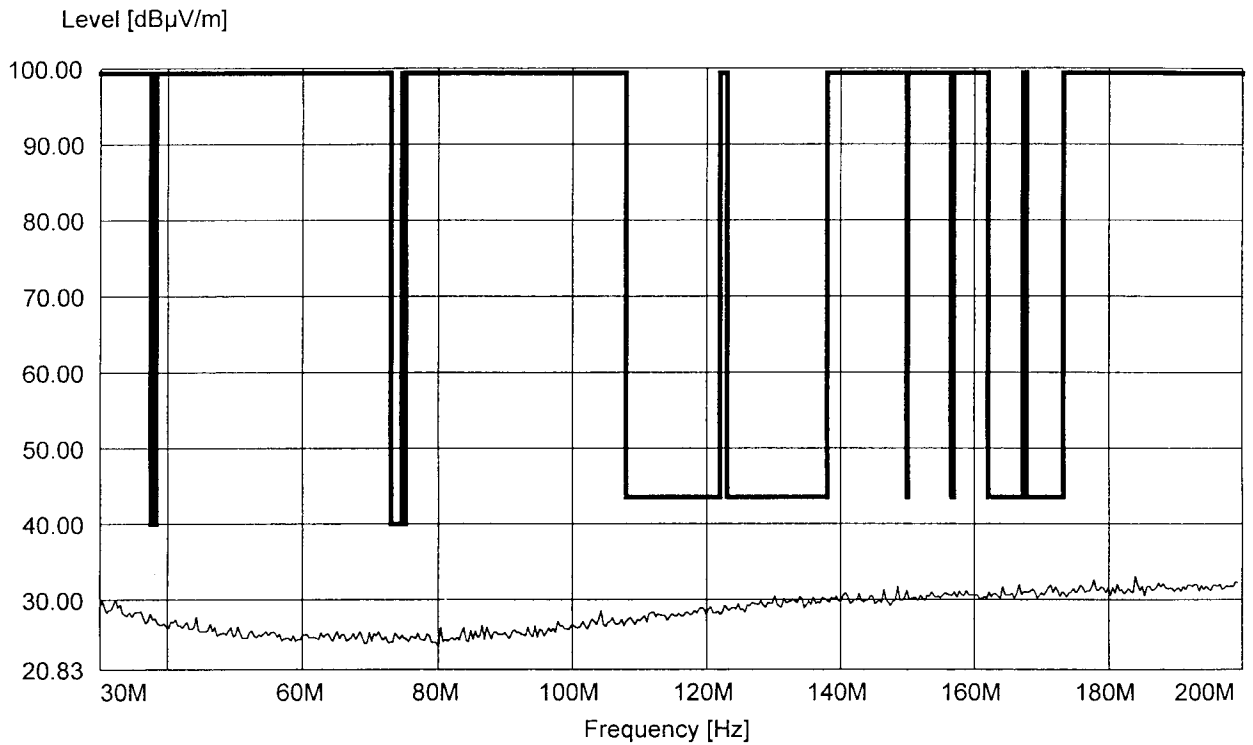

— MES 1. FCC\_part\_15  
— LIM FCC\_restricted


**Spurious emissions Field Strength Tx  
FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 40  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to §15247 / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Comment 2: Freq:669.739MHz Emax:26.28dBµV/m RBW: 100 kHz

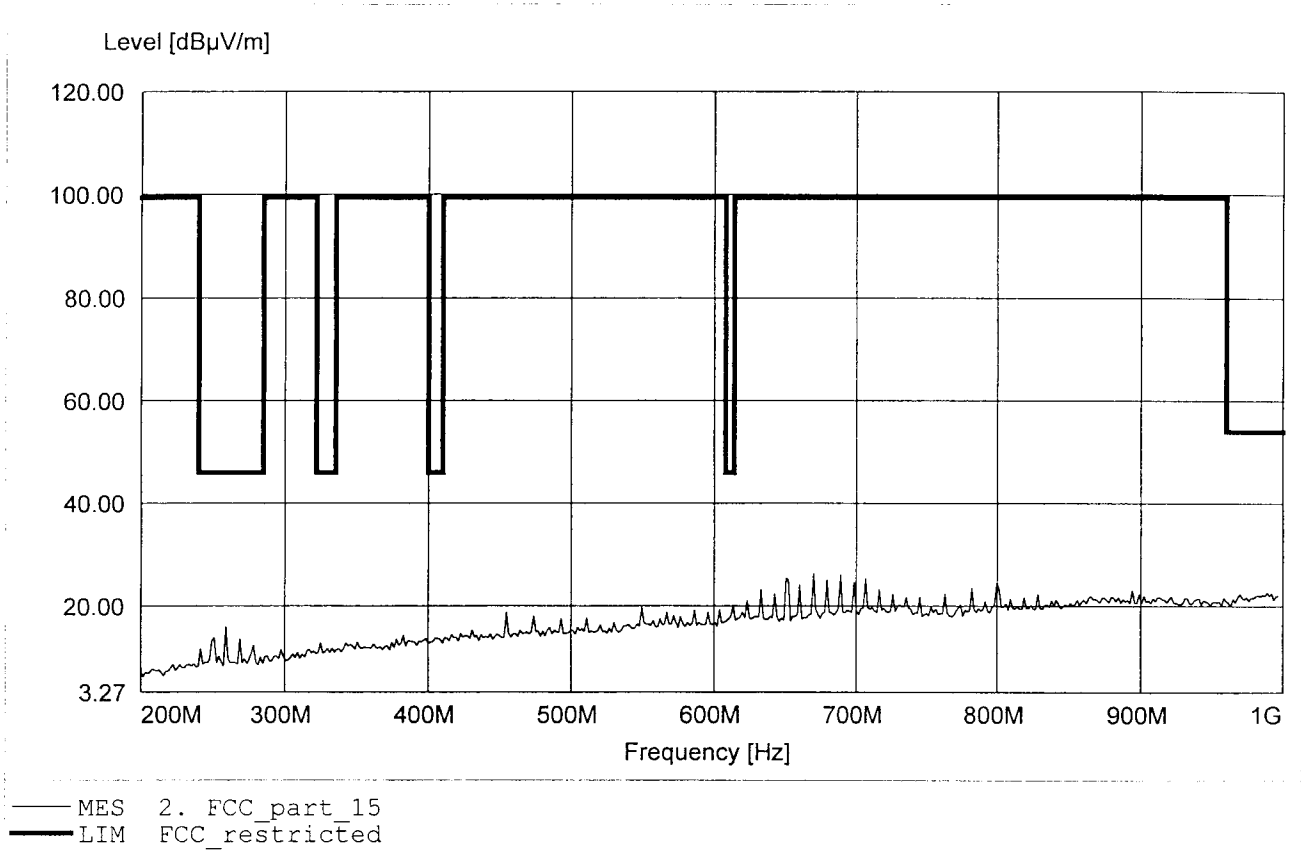

**Spurious emissions Field Strength Tx**  
**FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 40  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to §15247 / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Comment 2: Freq:688.978MHz Emax:27.19dBµV/m RBW: 100 kHz

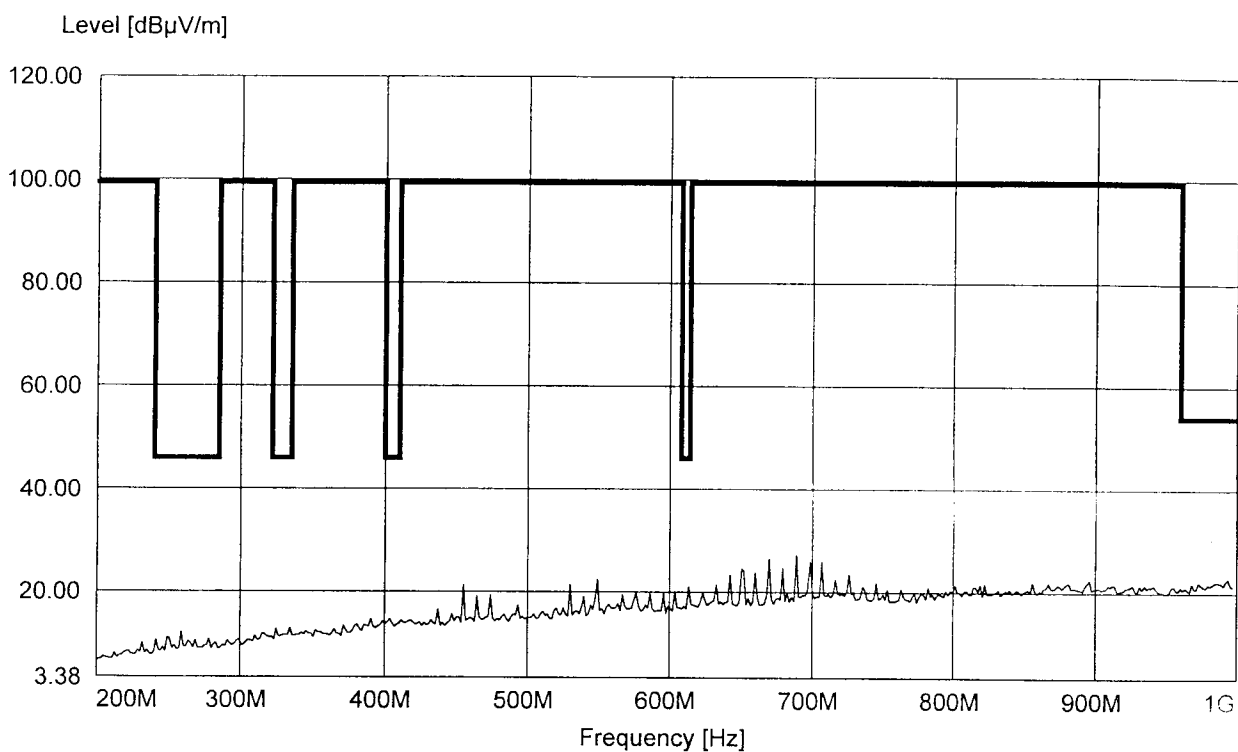


— MES 2. FCC\_part\_15  
— LIM FCC\_restricted




**Spurious emissions Field Strength Tx**  
**FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 40  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx  
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.  
Comment 2: Freq:2.503GHz Emax:42.75dBμV/m RBW: 1 MHz

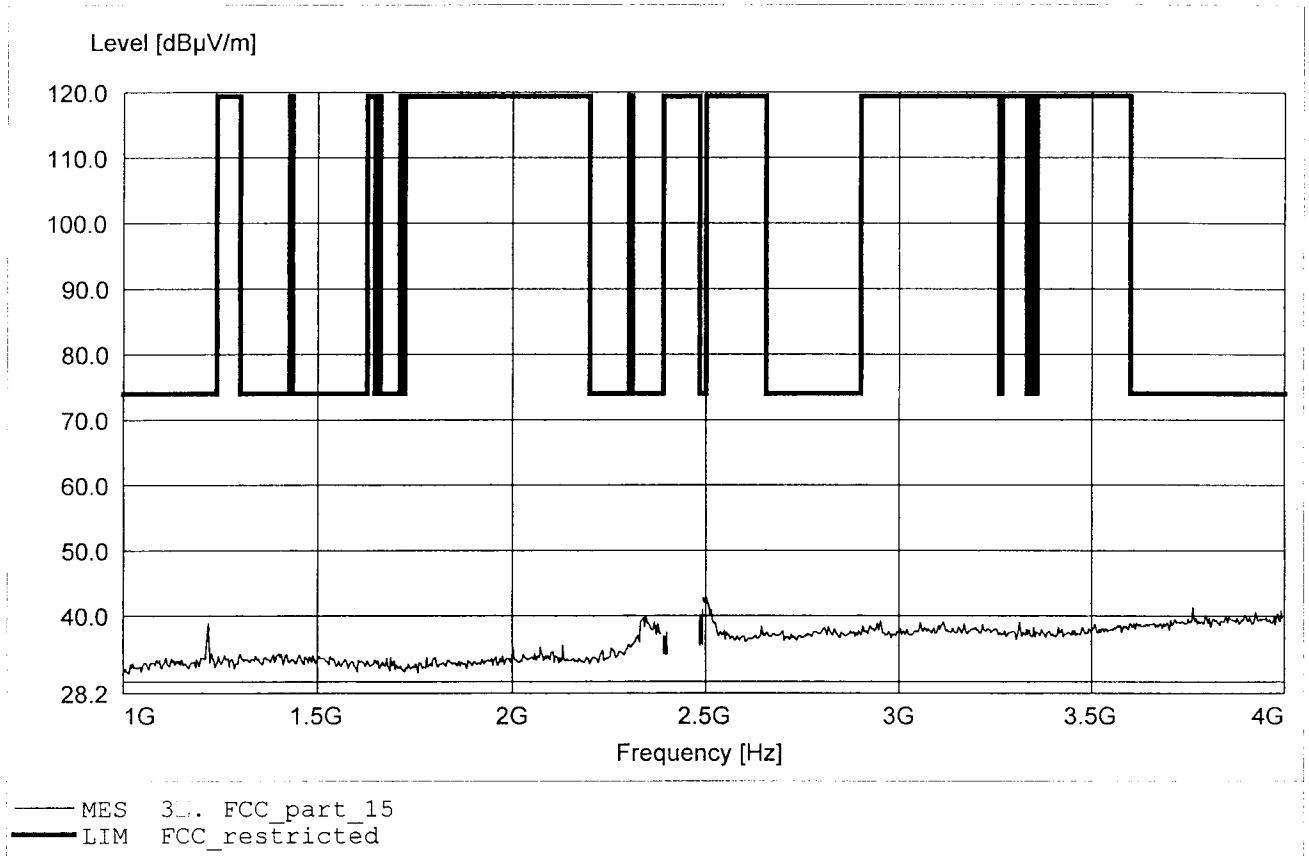

**Spurious emissions Field Strength Tx**  
**FCC RULES PART 15, SUBPART C**


EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 40  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to §15247, Limit 20 dB up peak detector / mode: Tx  
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.  
Comment 2: Freq:2.506GHz Emax:45.25dBμV/m RBW: 1 MHz

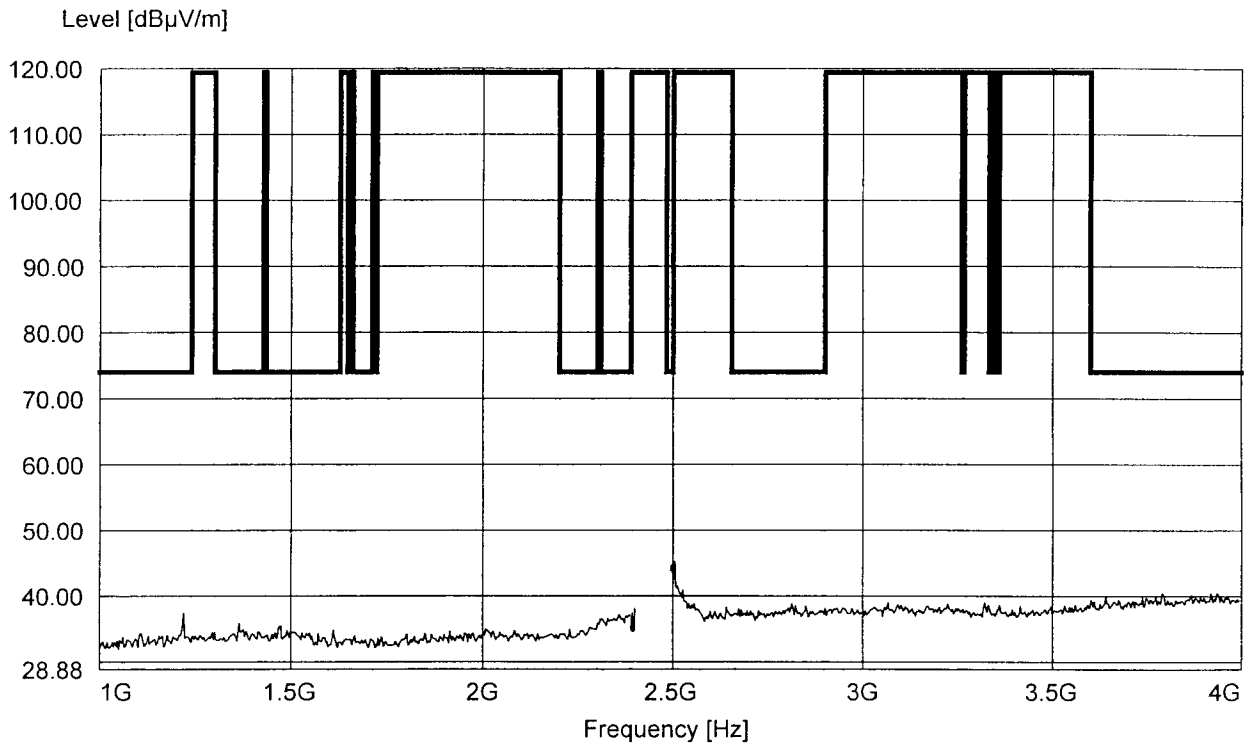

— MES 3. FCC\_part\_15  
— LIM FCC\_restricted


**Spurious emissions Field Strength Tx  
FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 40  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to §15247, Limit 20 dB up peak detector / mode: Tx  
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.  
Comment 2: Freq:4.882GHz Emax:52.56dBµV/m RBW: 1 MHz

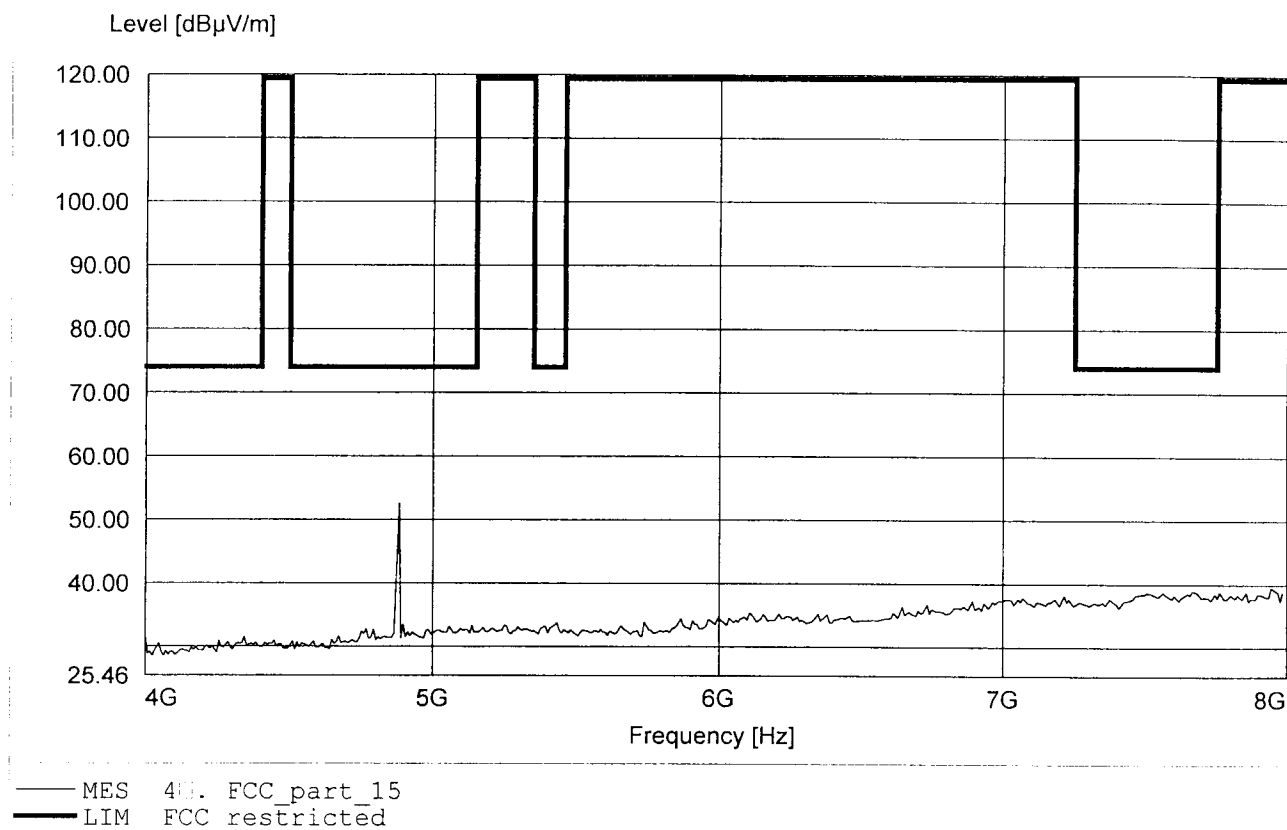


**Spurious emissions Field Strength Tx**  
**FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 40  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx  
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.  
Comment 2: Freq:4.882GHz Emax:56.27dBµV/m RBW: 1 MHz

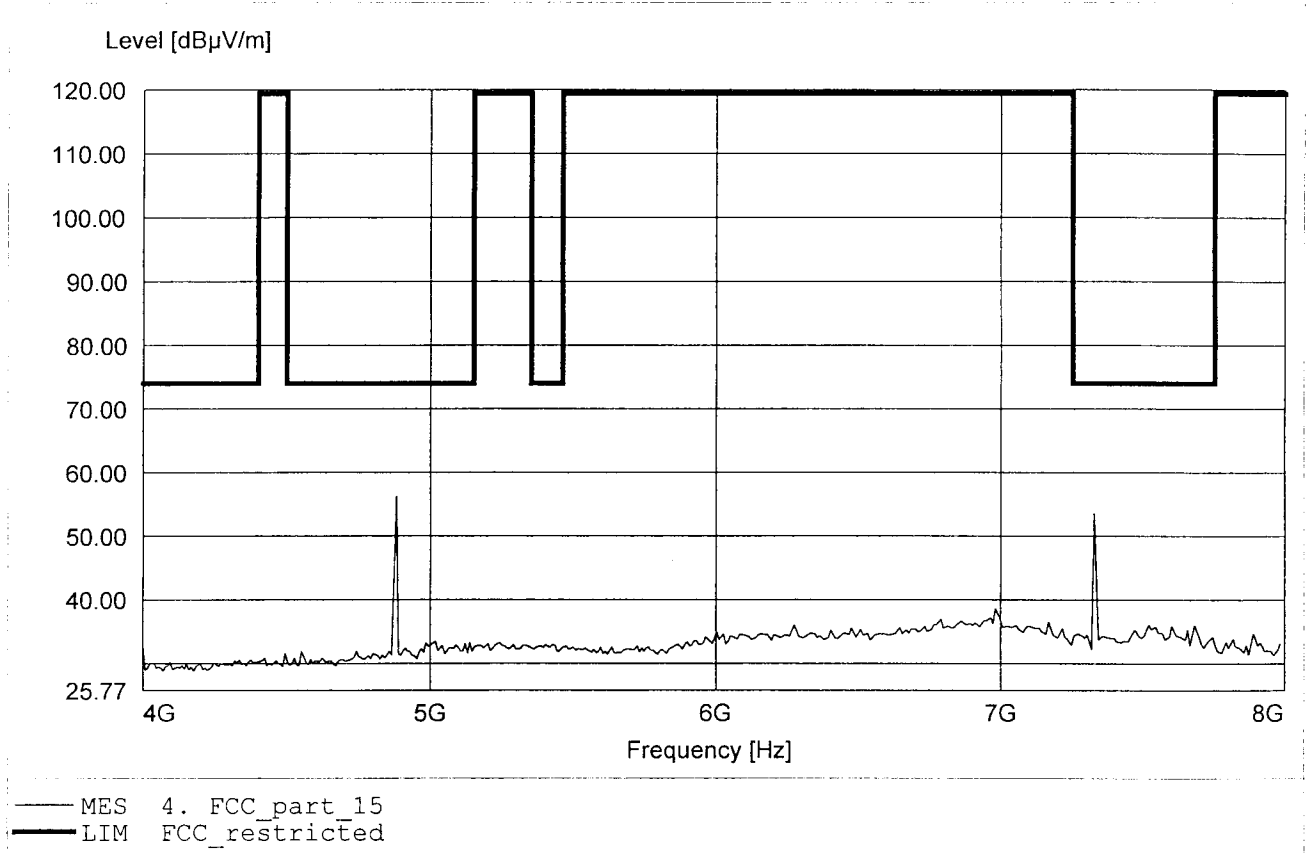


**Spurious emissions Field Strength Tx  
FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 40  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to §15.247, Limit 20 dB up peak detector / mode: Tx  
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.  
Comment 2: Freq:11.703GHz Emax:42.82dBuV/m RBW: 1 MHz

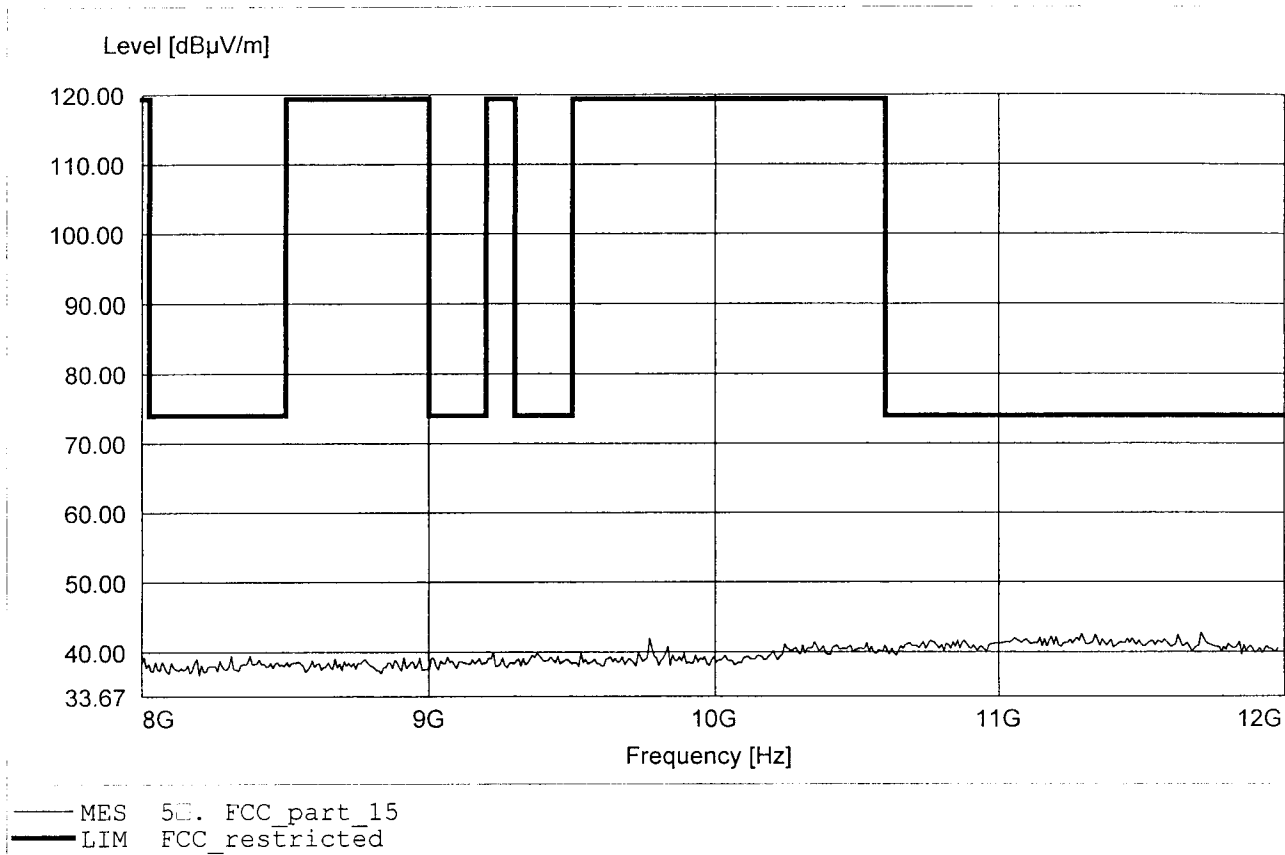


**Spurious emissions Field Strength Tx  
FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 40  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx  
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.  
Comment 2: Freq:9.772GHz Emax:45.34dBμV/m RBW: 1 MHz

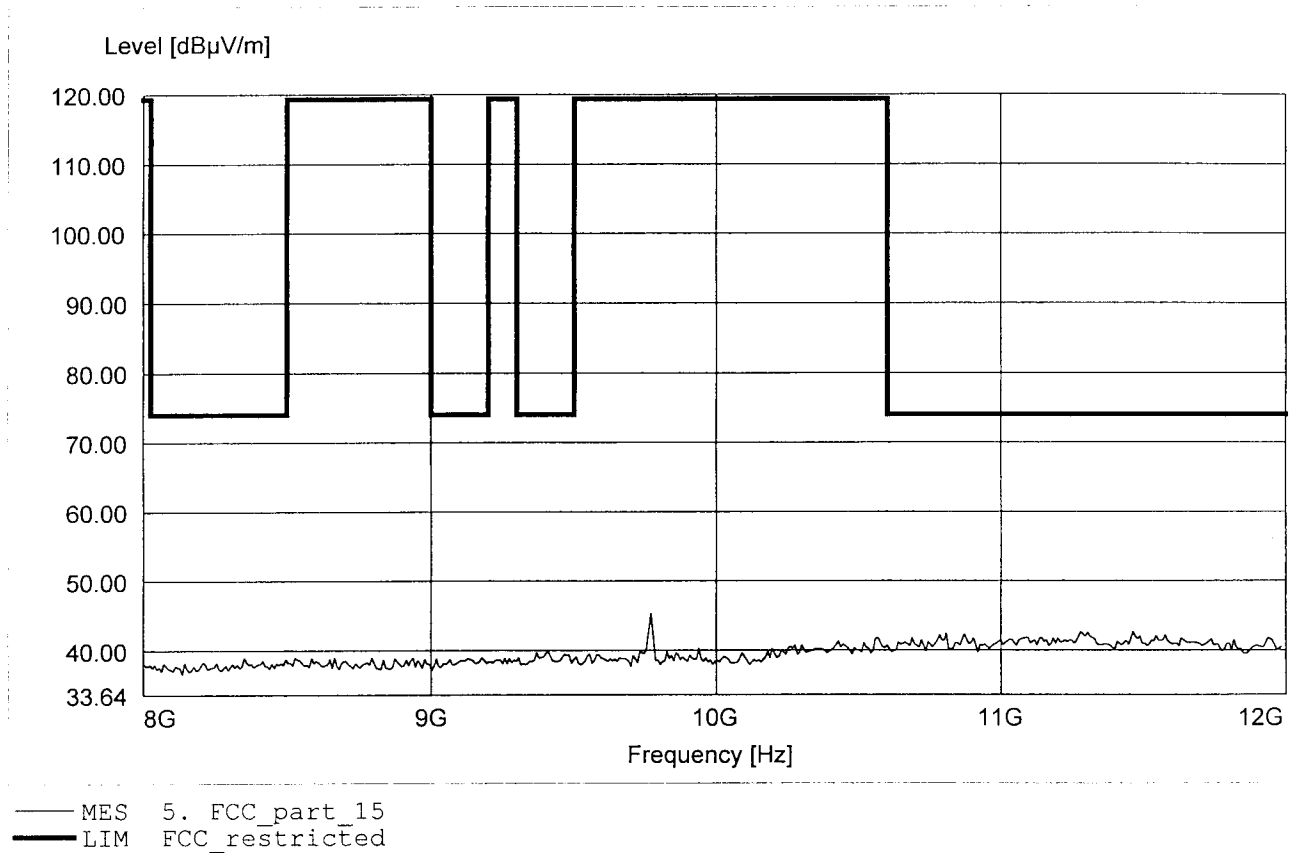


**Spurious emissions Field Strength Tx  
FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 40  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to §15.247, Limit 20 dB up peak detector / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq:14.655GHz Emax:47.18dBµV/m RBW: 1 MHz

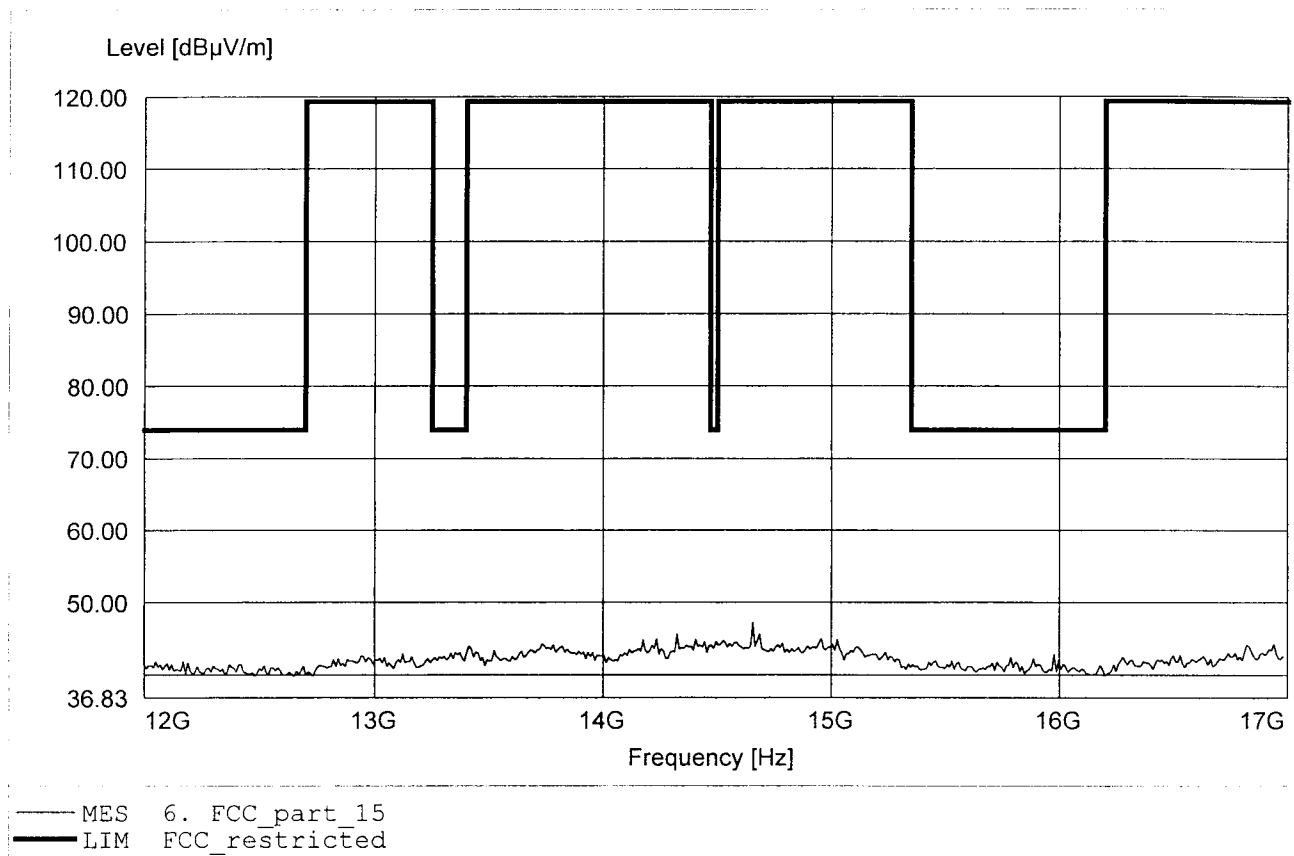

**Spurious emissions Field Strength Tx**  
**FCC RULES PART 15, SUBPART C**


EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 40  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq:14.655GHz Emax:49.89dBµV/m RBW: 1 MHz

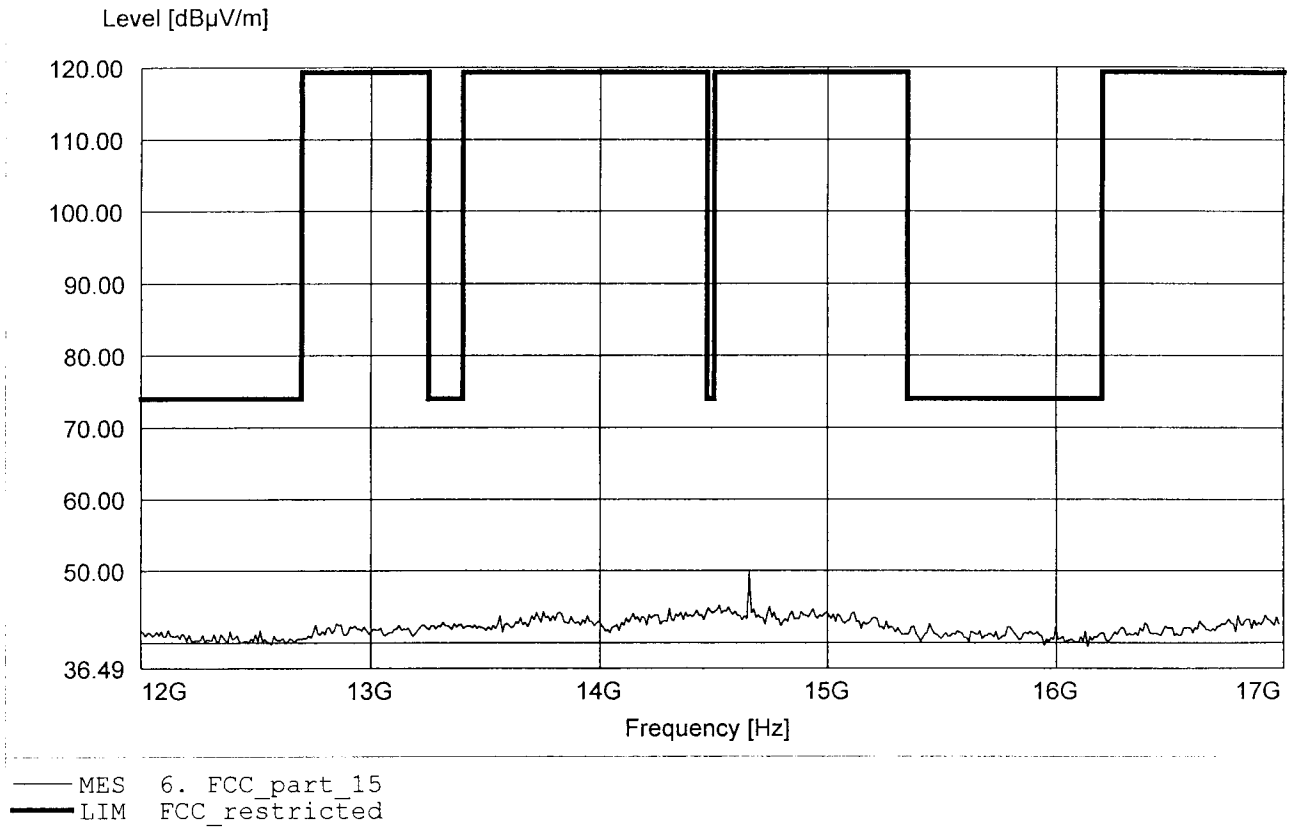



**Spurious emissions Field Strength Tx**  
**FCC RULES PART 15, SUBPART C**


EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 40  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq:26.157GHz Emax:50.40dBμV/m RBW: 1 MHz

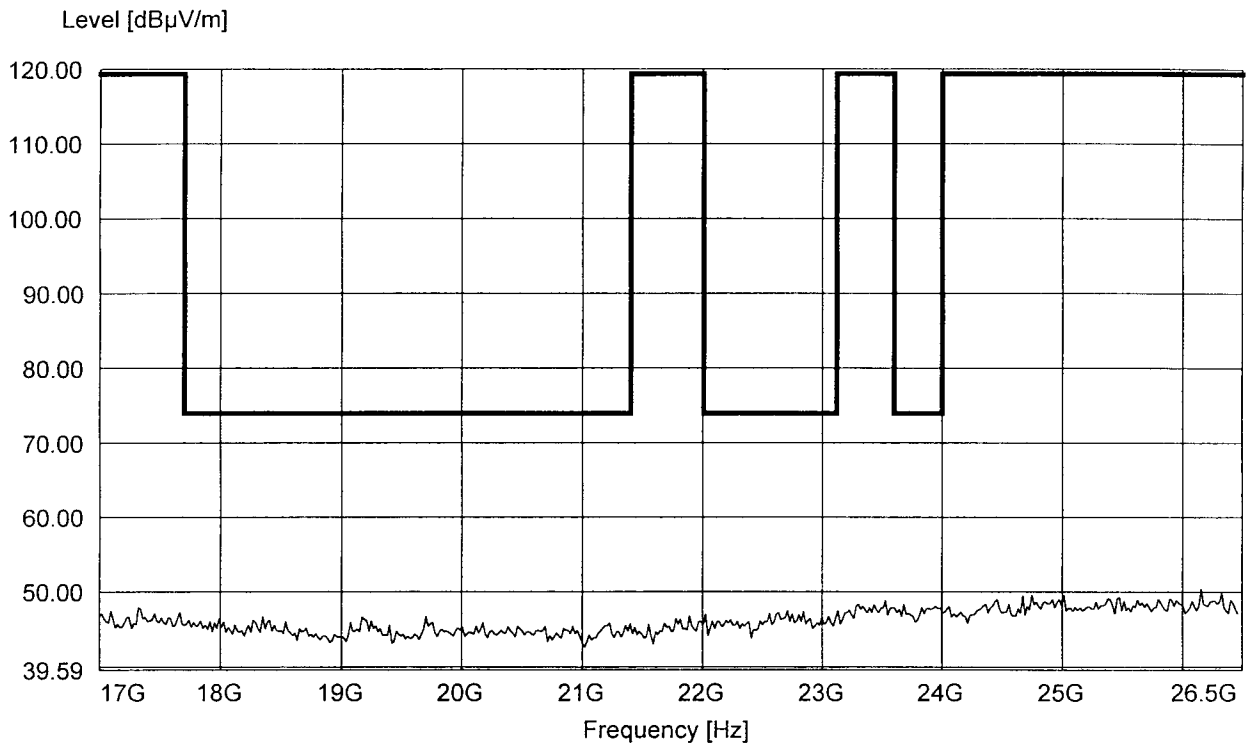

— MES 70. FCC\_part\_15  
— LIM FCC\_restricted


**Spurious emissions Field Strength Tx  
FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 40  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq:26.024GHz Emax:49.64dBµV/m RBW: 1 MHz

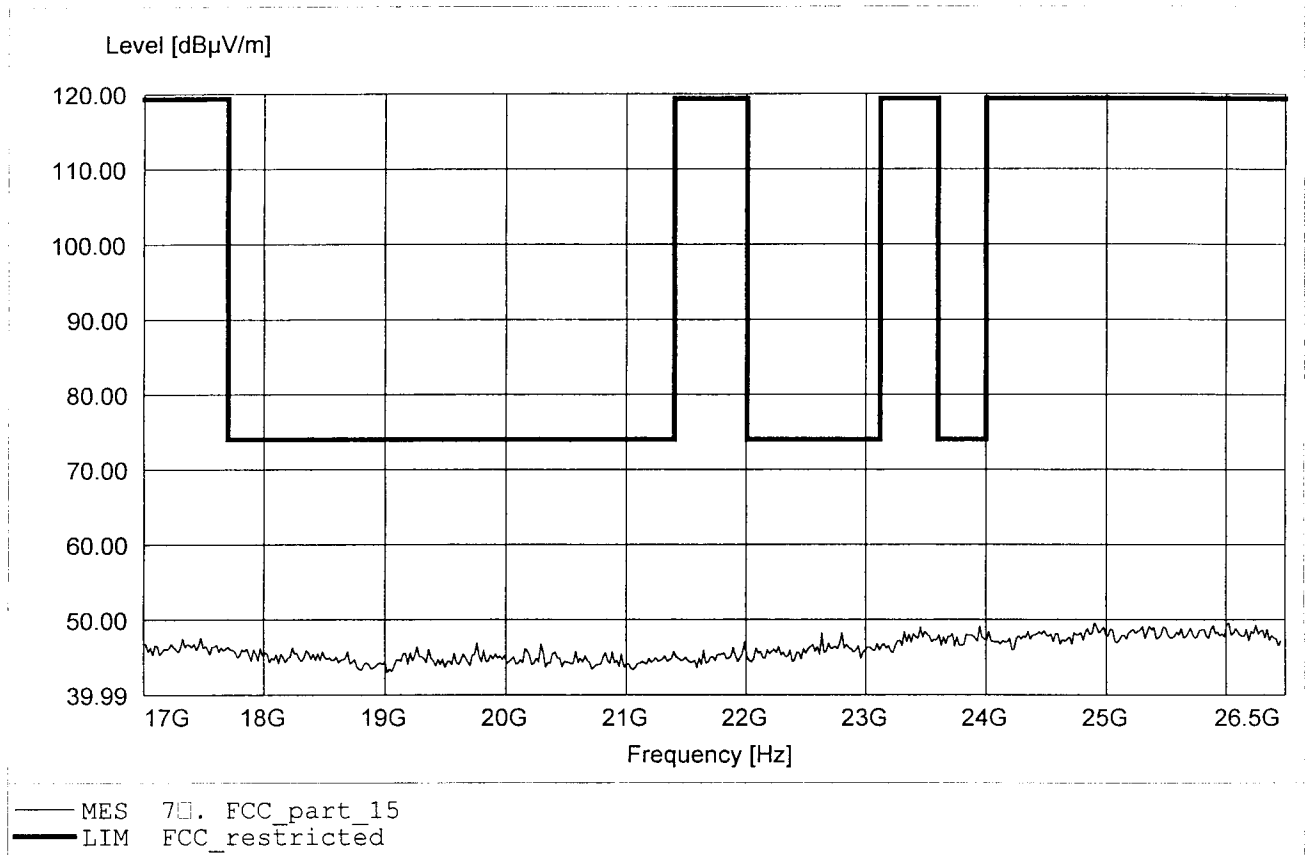


**Spurious emissions Field Strength Tx**  
**FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 78  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15247 / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq:193.186MHz Emax:33.07dBµV/m RBW: 100 kHz

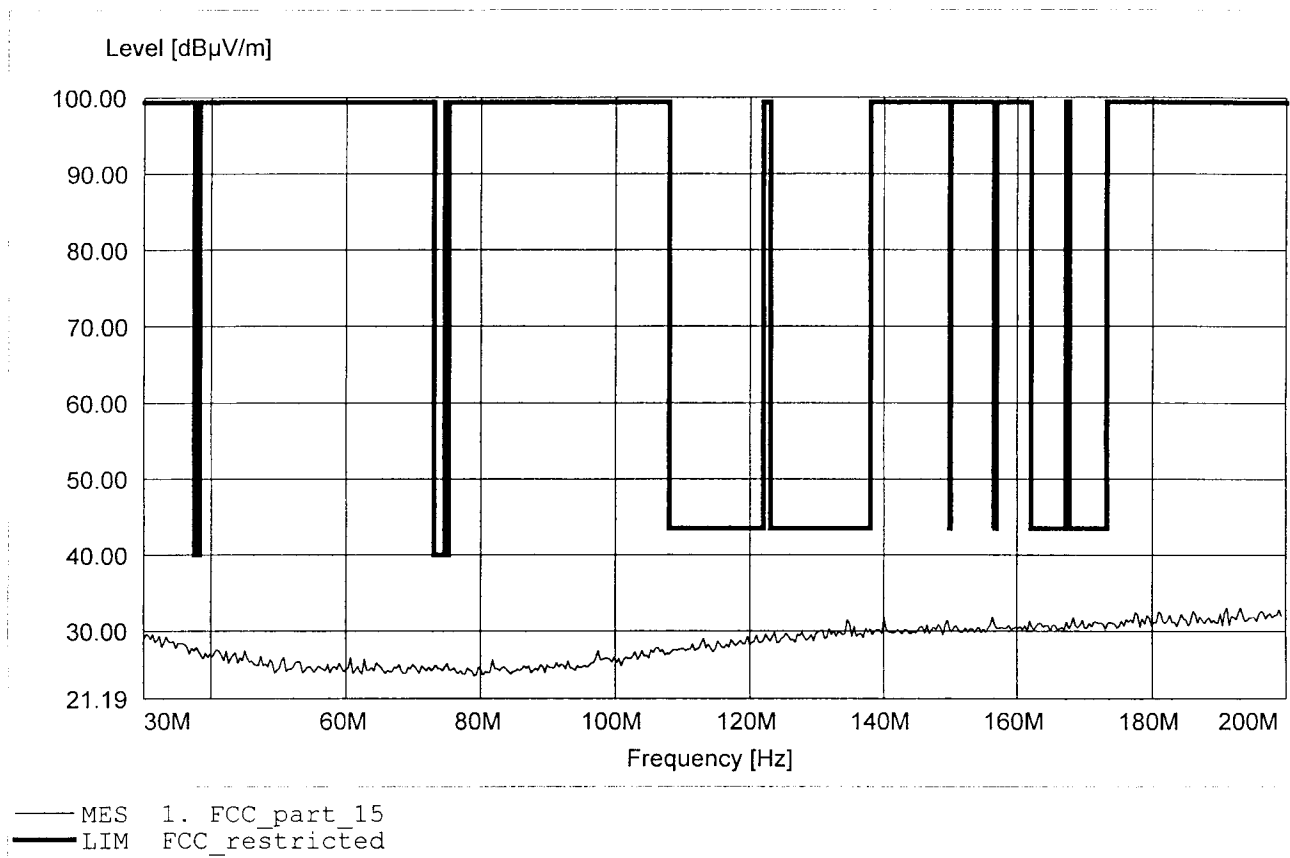


**Spurious emissions Field Strength Tx**  
**FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 78  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S15247 / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq:179.900MHz Emax:33.15dBμV/m RBW: 100 kHz

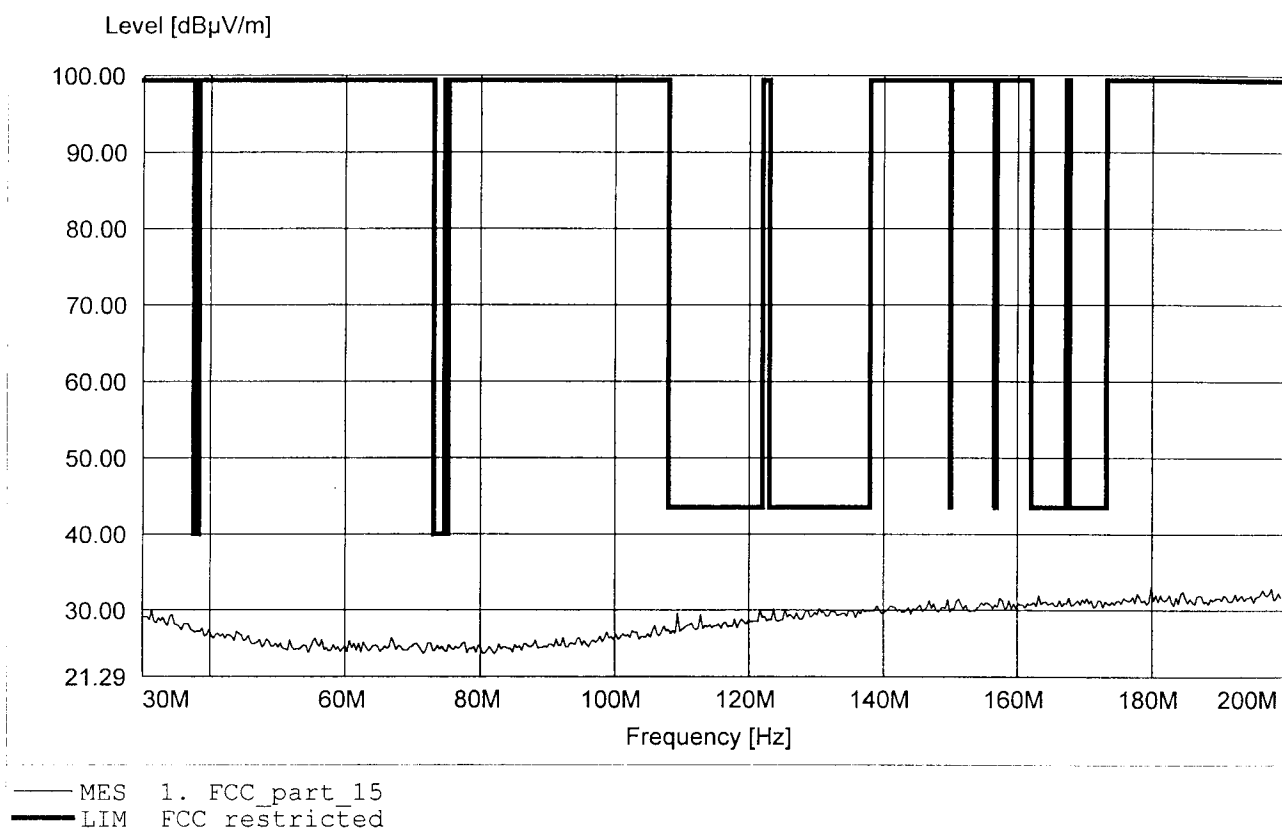


**Spurious emissions Field Strength Tx**  
**FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 78  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to S15247 / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Comment 2: Freq:706.613MHz Emax:27.39dBµV/m RBW: 100 kHz

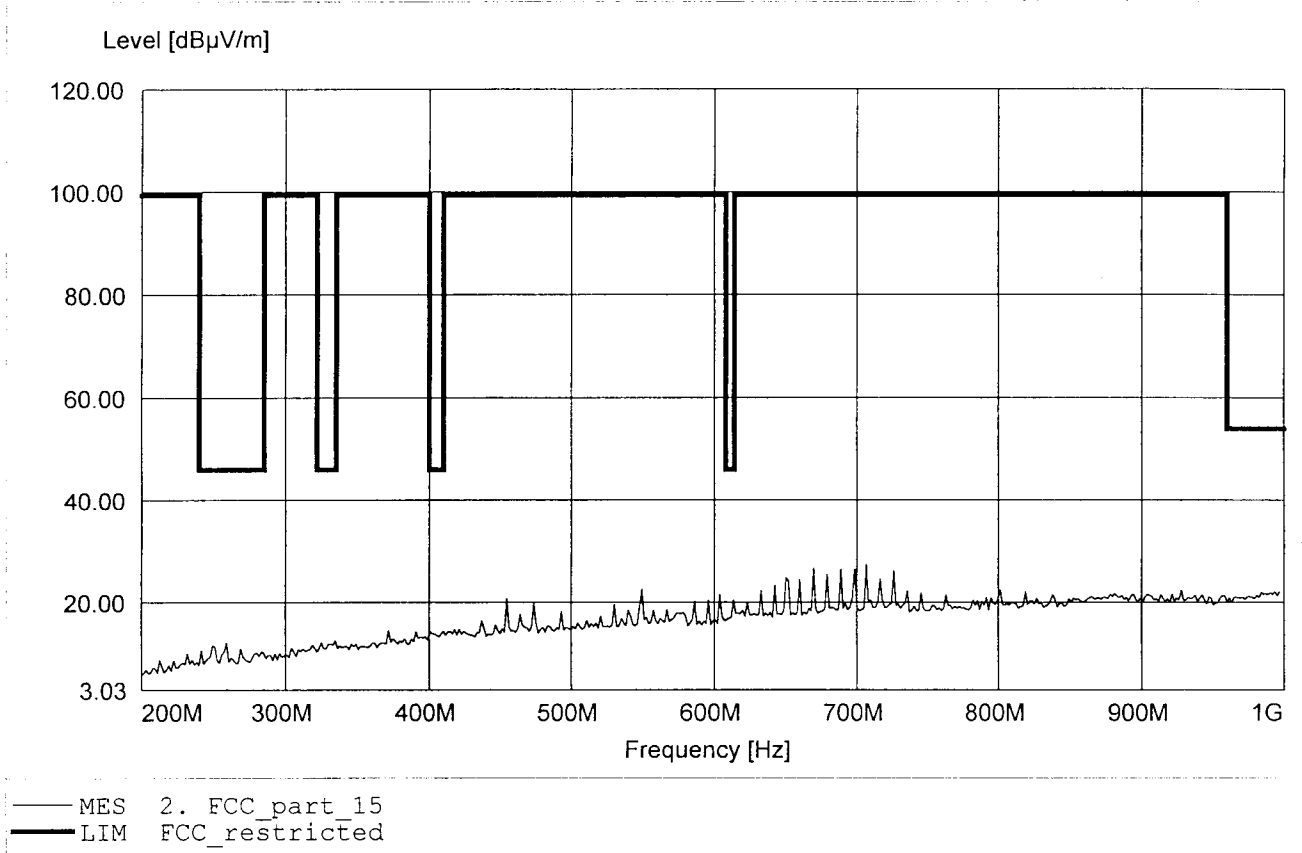


**Spurious emissions Field Strength Tx**  
**FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 78  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to S15247 / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Comment 2: Freq:669.739MHz Emax:26.33dBµV/m RBW: 100 kHz

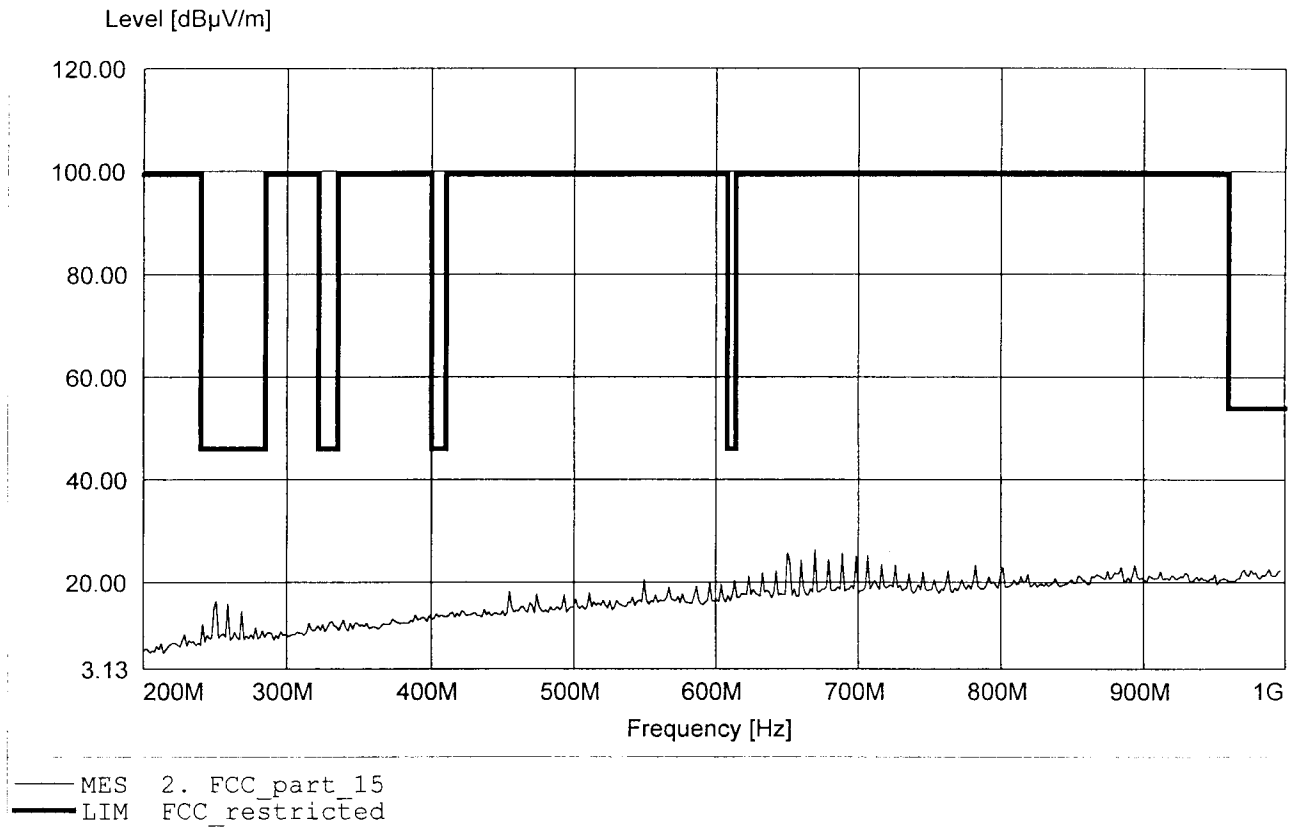


**Spurious emissions Field Strength Tx  
FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 78  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx  
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.  
Comment 2: Freq:2.483GHz Emax:62.53dBμV/m RBW: 1 MHz

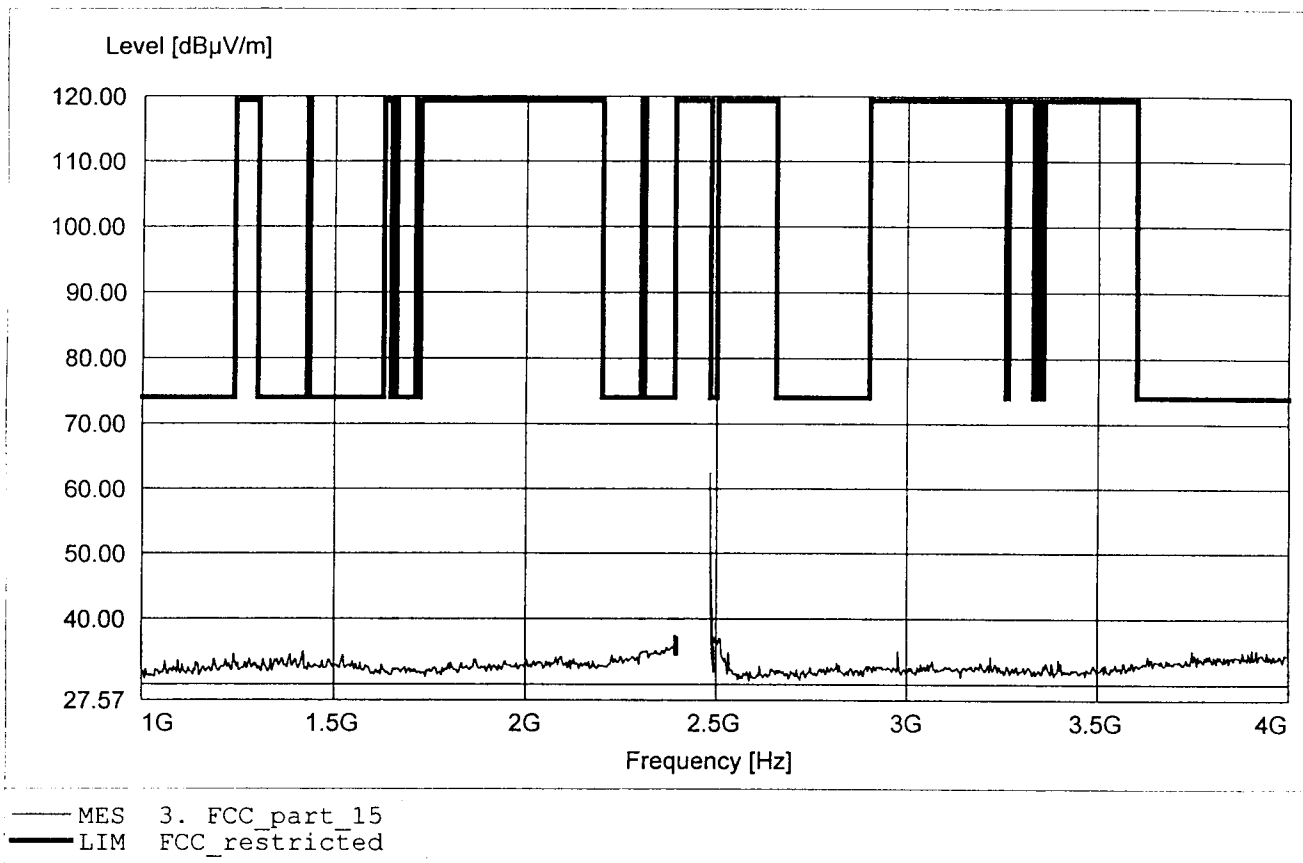

**Spurious emissions Field Strength Tx**  
**FCC RULES PART 15, SUBPART C**


EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 78  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to §15247, Limit 20 dB up peak detector / mode: Tx  
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.  
Comment 2: Freq:2.483GHz Emax:64.70dBµV/m RBW: 1 MHz

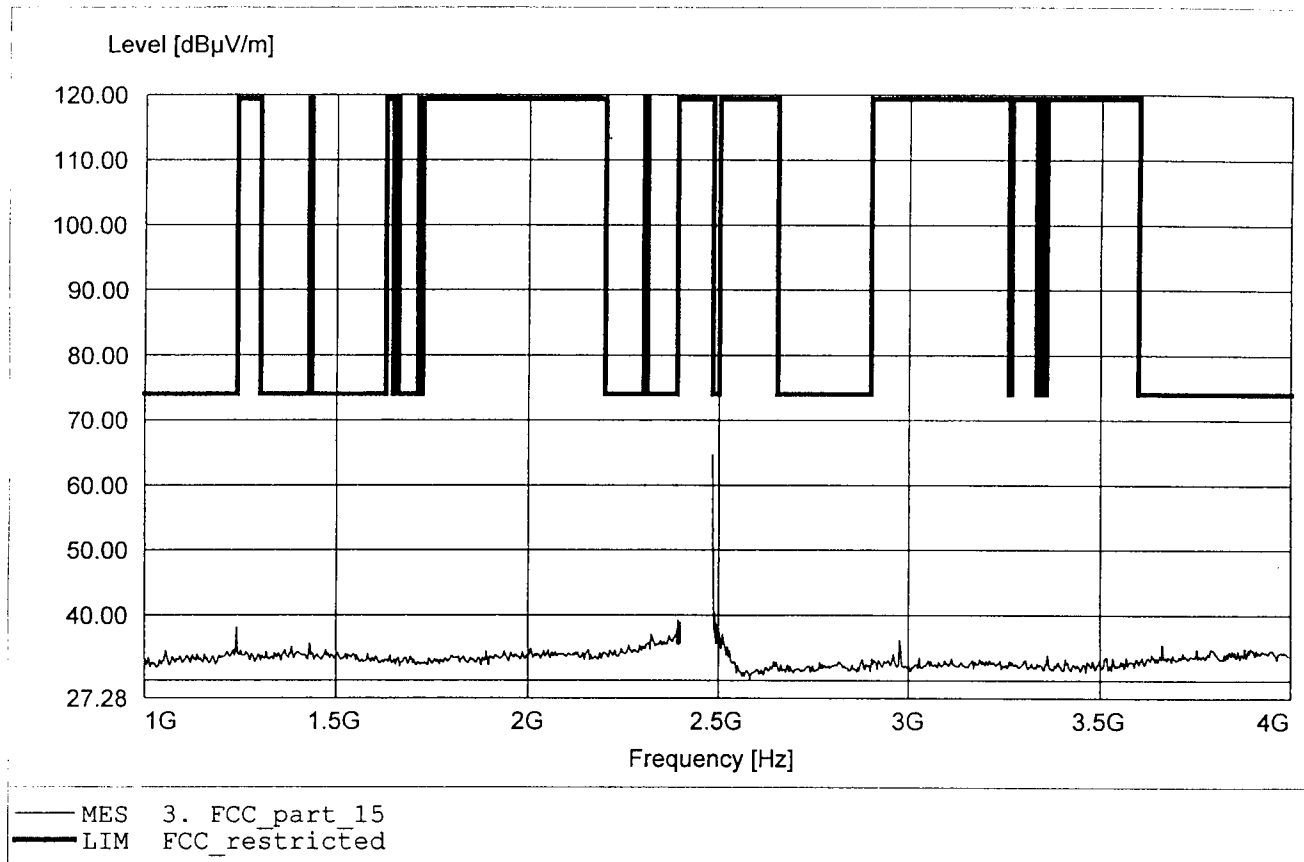




**Spurious emissions Field Strength Tx**  
**FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 78  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx  
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.  
Comment 2: Freq:4.962GHz Emax:55.26dBμV/m RBW: 1 MHz

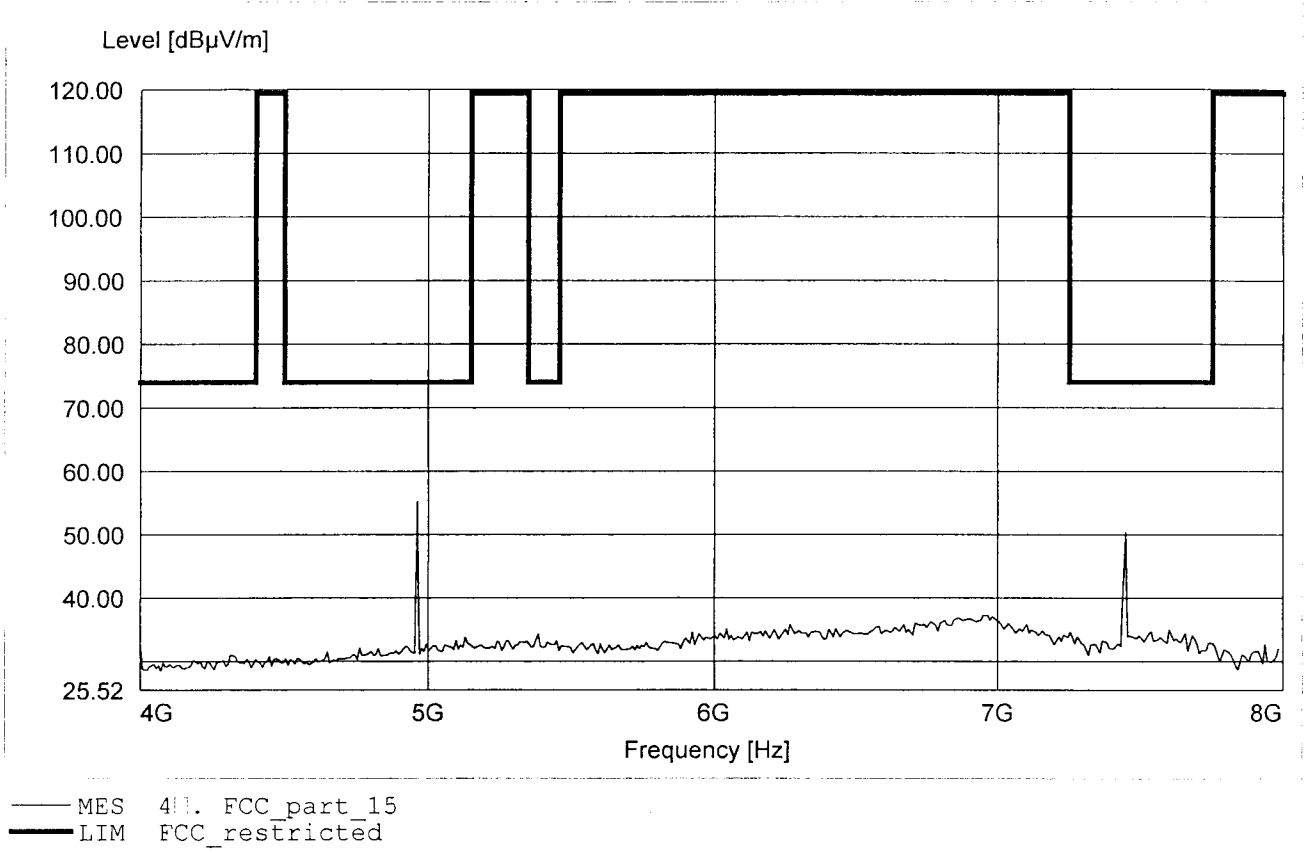


**Spurious emissions Field Strength Tx**  
**FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 78  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to §15.247, Limit 20 dB up peak detector / mode: Tx  
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.  
Comment 2: Freq:4.962GHz Emax:62.54dBµV/m RBW: 1 MHz

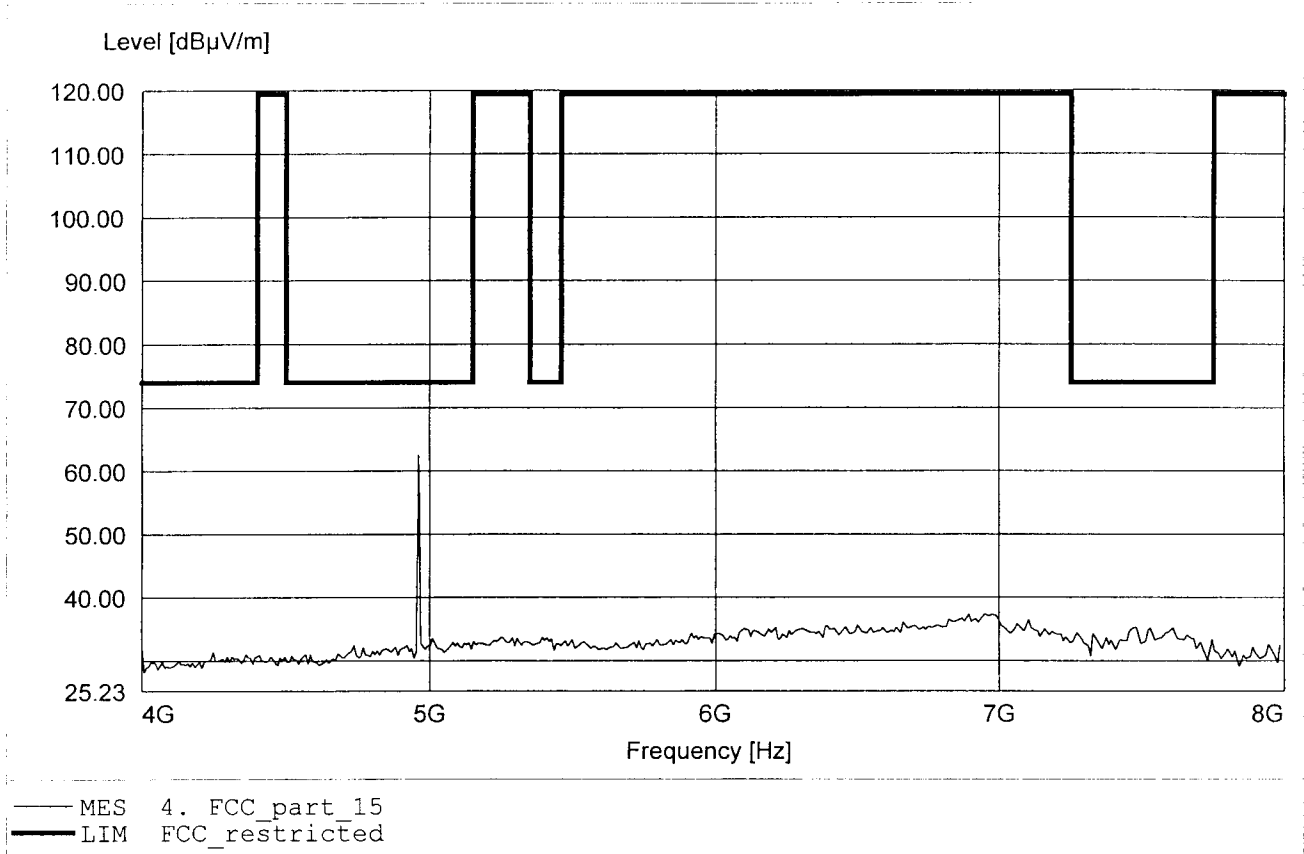


**Spurious emissions Field Strength Tx**  
**FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 78  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx  
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.  
Comment 2: Freq:10.790GHz Emax:42.07dBuV/m RBW: 1 MHz

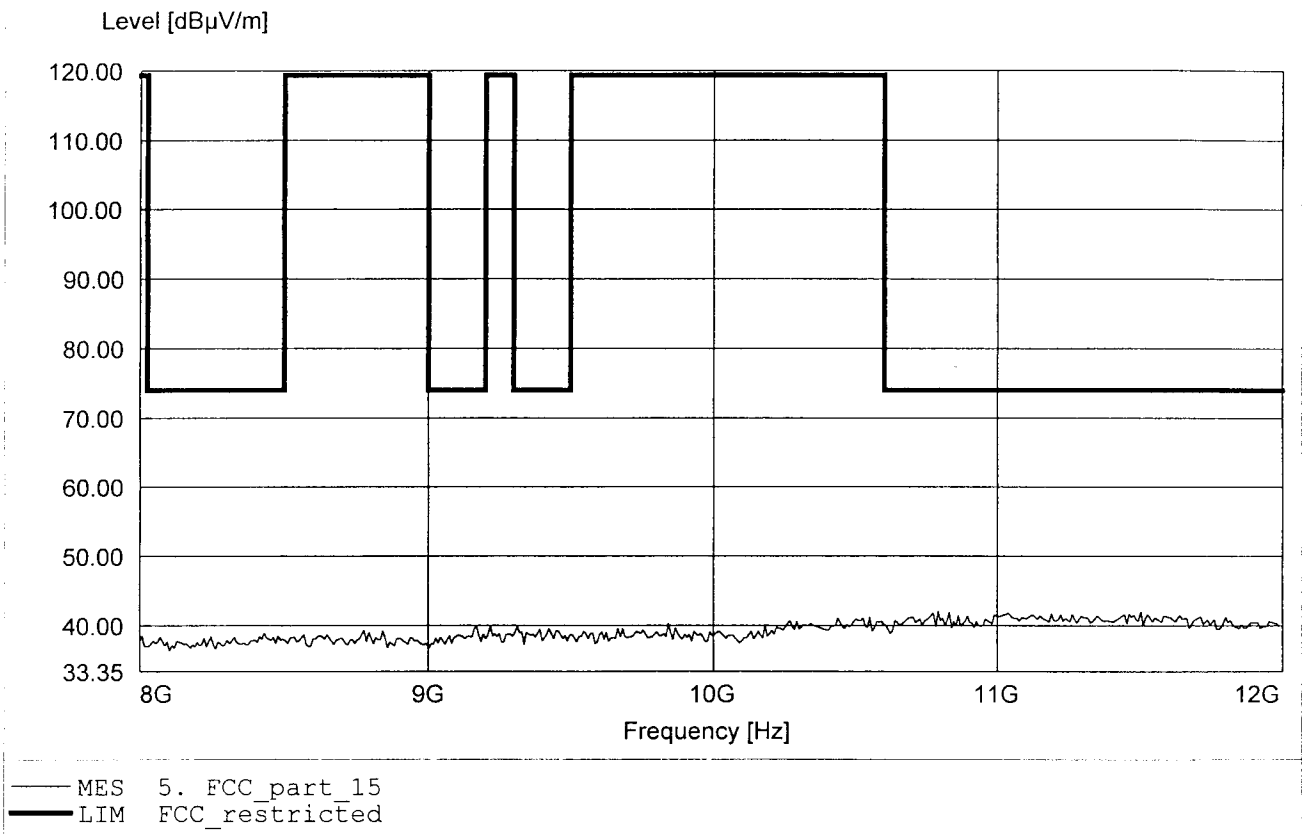


**Spurious emissions Field Strength Tx  
FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 78  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx  
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.  
Comment 2: Freq:11.479GHz Emax:43.00dBμV/m RBW: 1 MHz

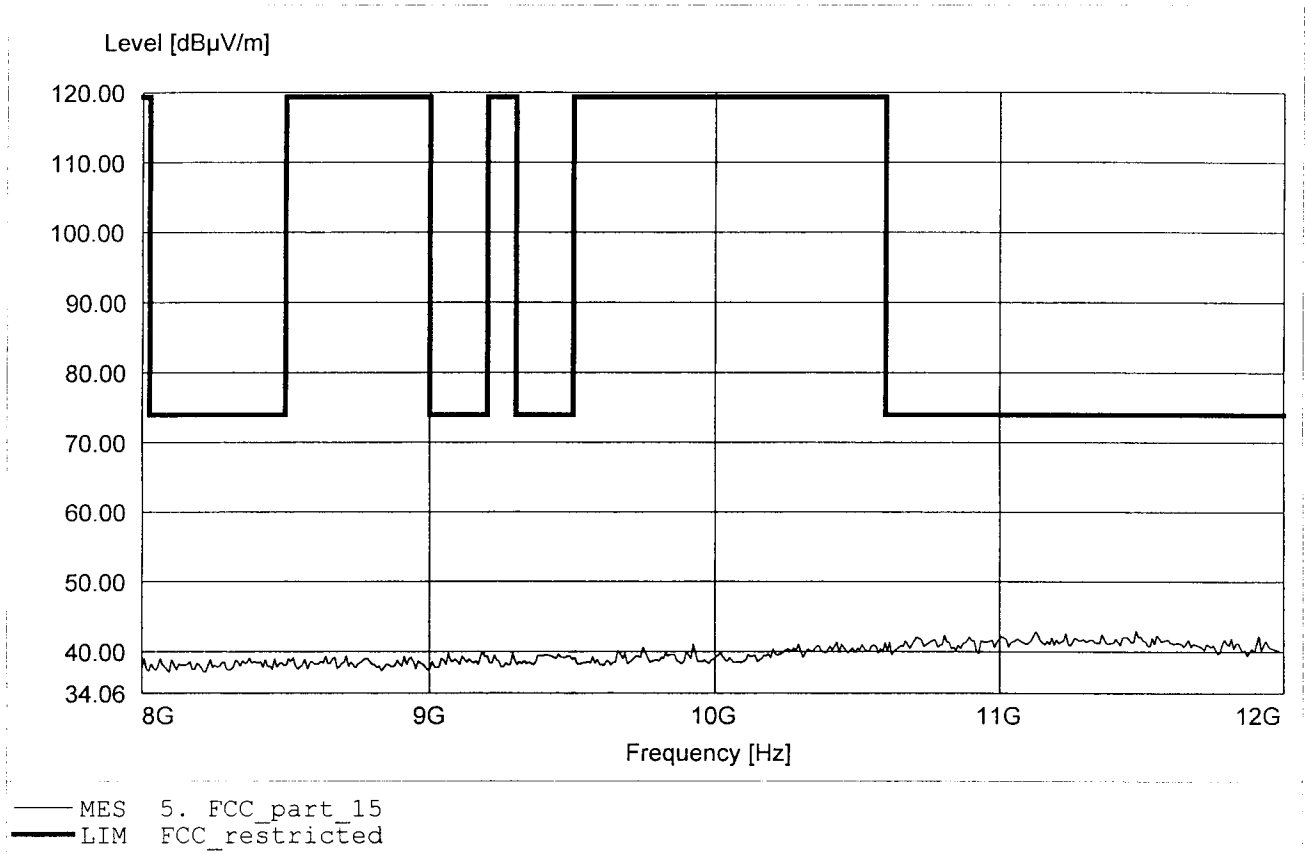


**Spurious emissions Field Strength Tx**  
**FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 78  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq:14.505GHz Emax:45.54dBμV/m RBW: 1 MHz

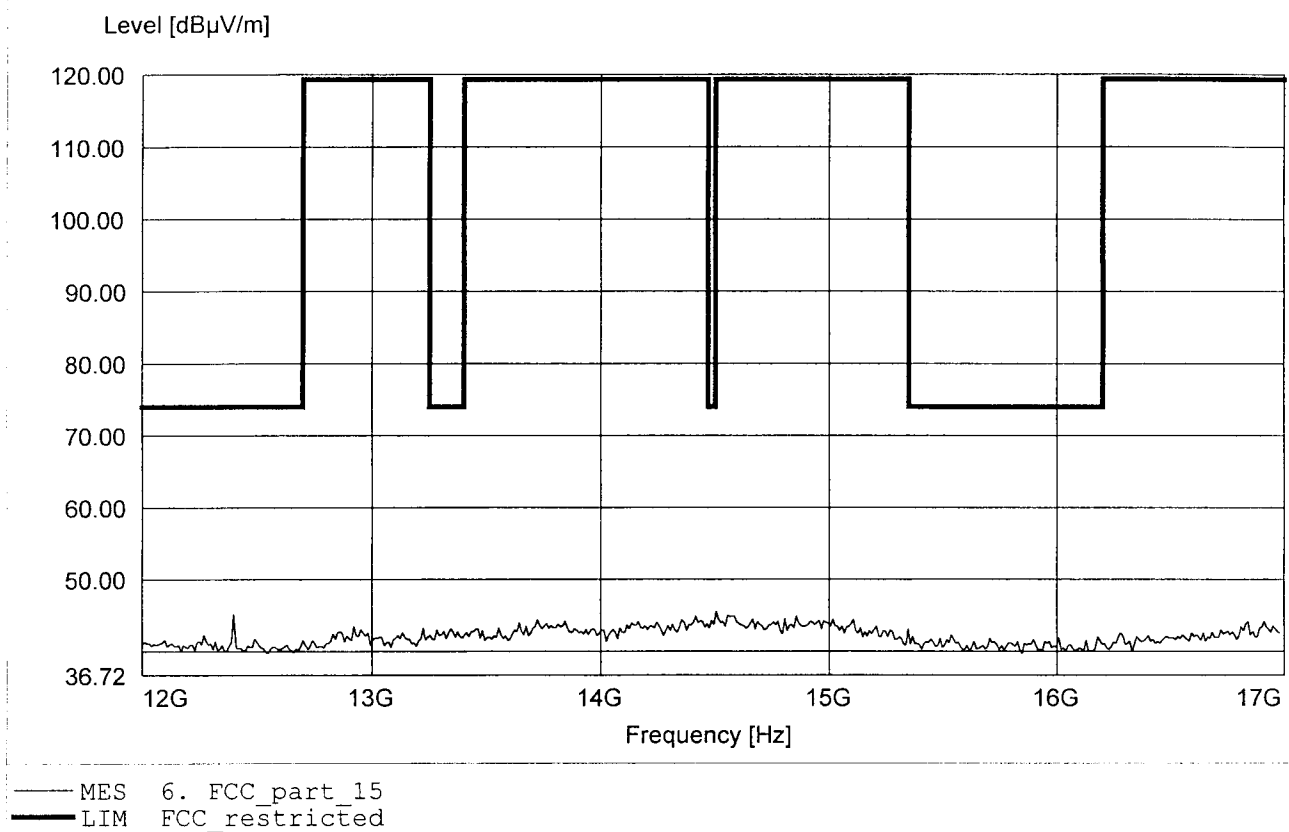


**Spurious emissions Field Strength Tx**  
**FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 78  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq:14.896GHz Emax:51.50dBµV/m RBW: 1 MHz

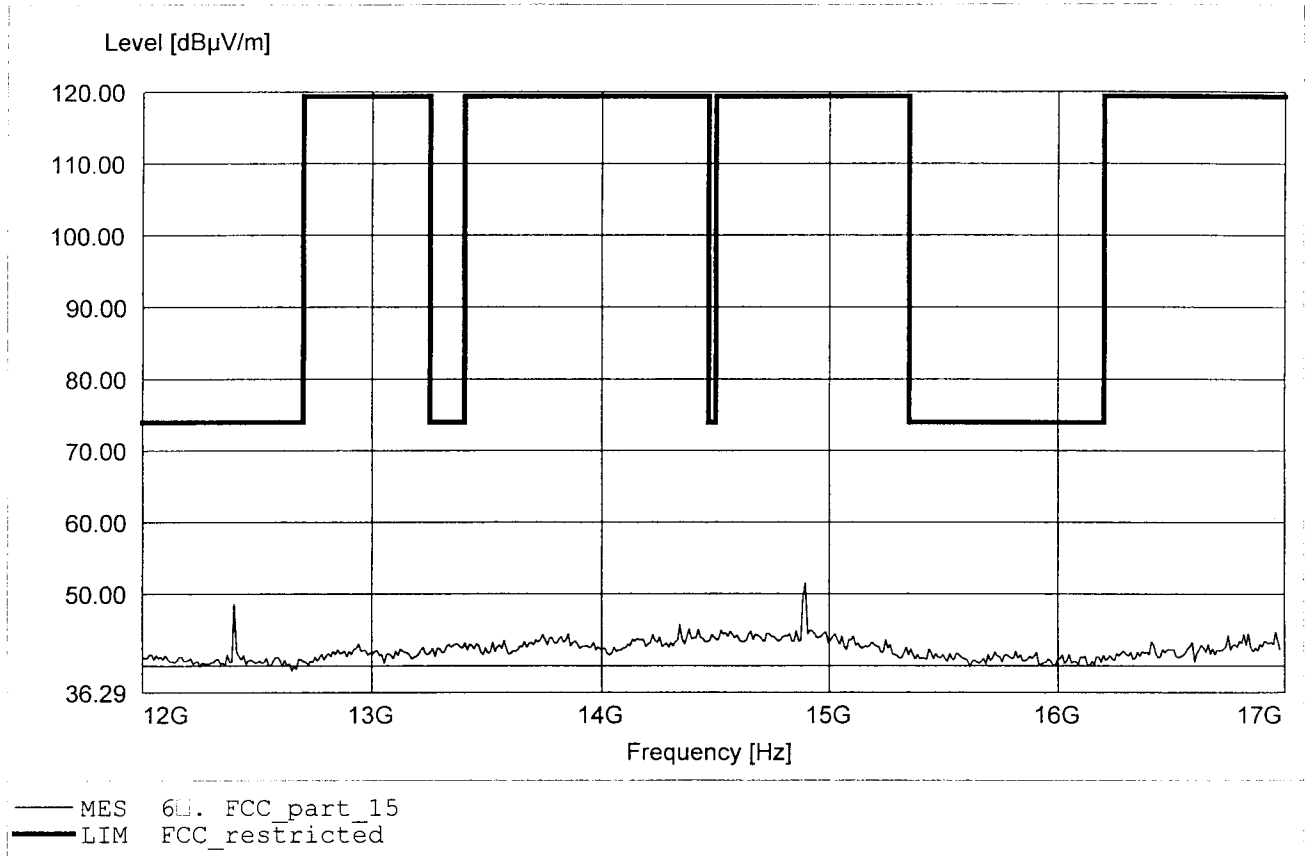


**Spurious emissions Field Strength Tx  
FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 78  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq:25.796GHz Emax:49.93dBμV/m RBW: 1 MHz

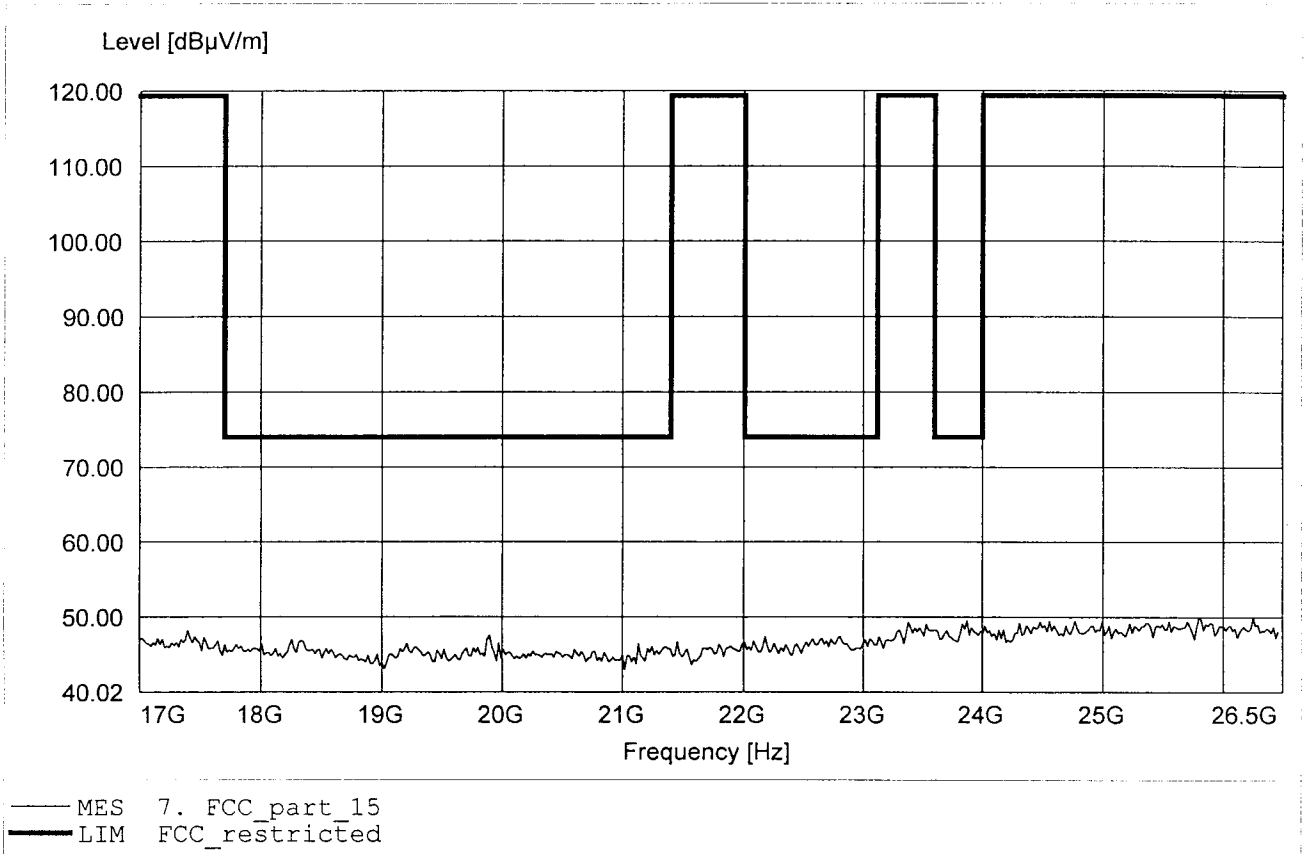

**Spurious emissions Field Strength Tx**  
**FCC RULES PART 15, SUBPART C**

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 78  
Model: Gn 9050  
Manufacturer: GN Netcom  
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C  
Test Site / Operator: ETS / Mr. Treffke  
Test Specification: according to §15247, Limit 20 dB up peak detector / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq:26.062GHz Emax:50.23dBµV/m RBW: 1 MHz

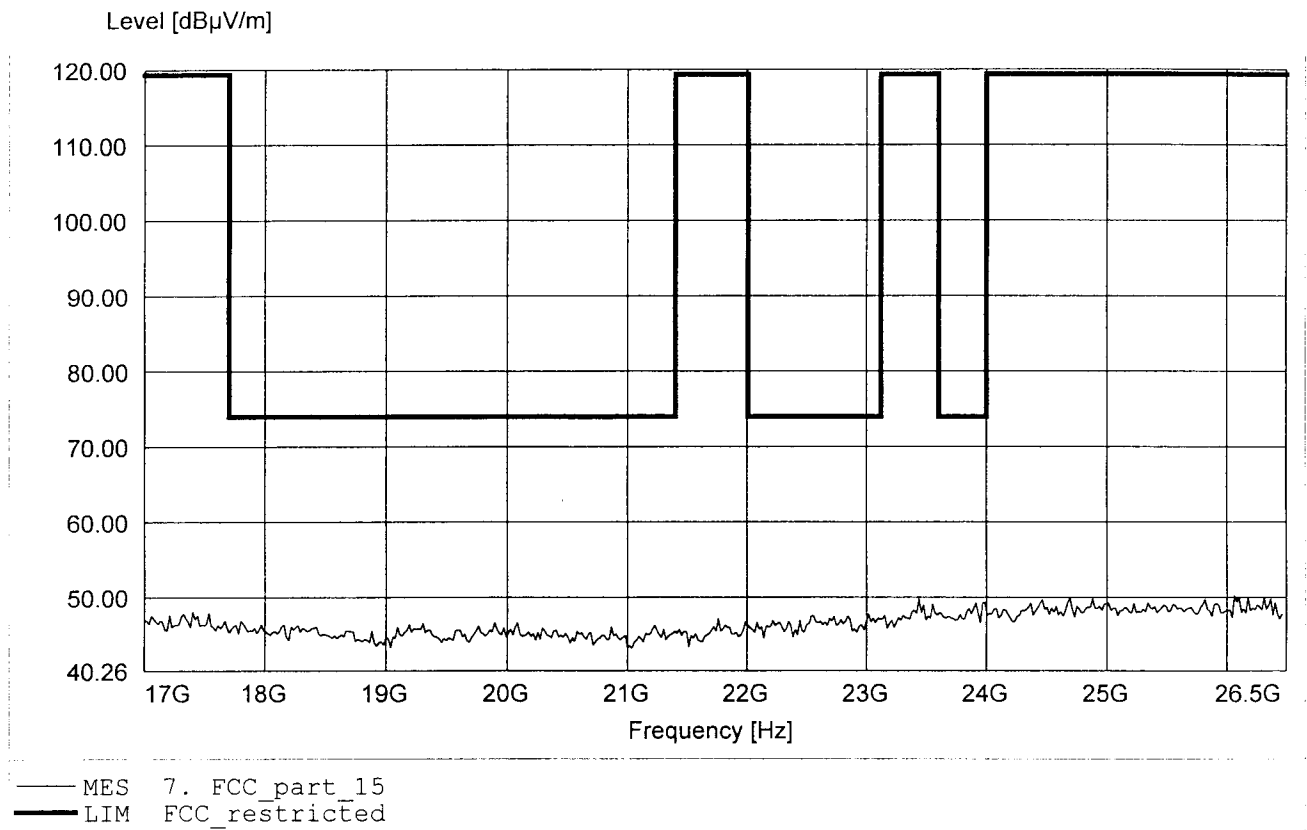





## Appendix D

Spurious Emissions conducted - Transmitter operating




## Appendix E

Carrier Frequency Separation



Delta 1 [T1] RBW 100 kHz RF Att 60 dB  
Ref Lvl 0.05 dB VBW 100 kHz  
35 dBm 1.04488978 MHz SWT 60 ms Unit dBm

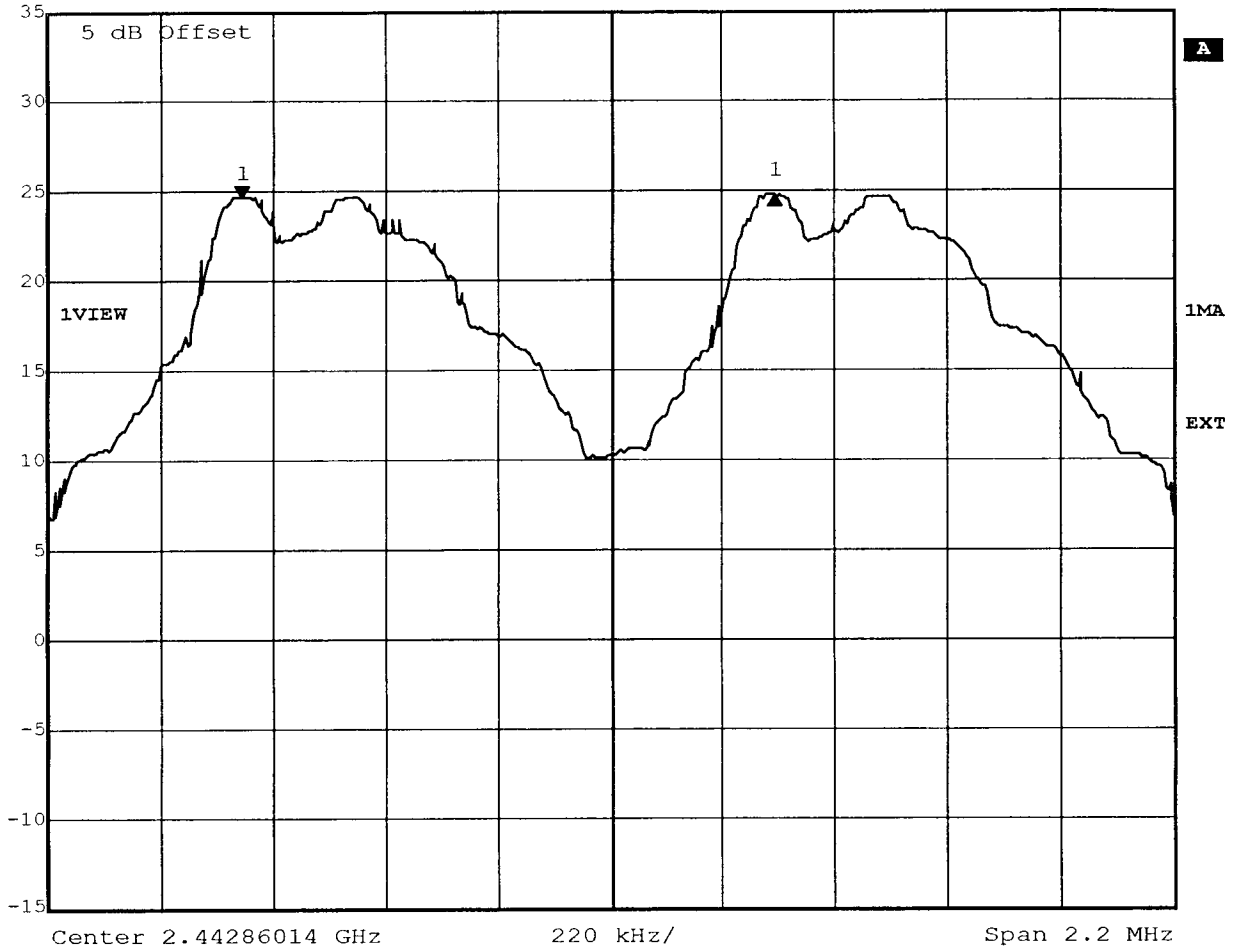

Title: Carrier Frequency Separation  
Comment A: GN Netcom Cordless Headset Gn 9050 Base  
Date: 24.OCT.2001 14:33:12




## Appendix F

Number of Hopping Frequencies



Marker 1 [T1] RBW 50 kHz RF Att 60 dB  
Ref Lvl 24.70 dBm VBW 50 kHz  
35 dBm 2.41432265 GHz SWT 25 ms Unit dBm

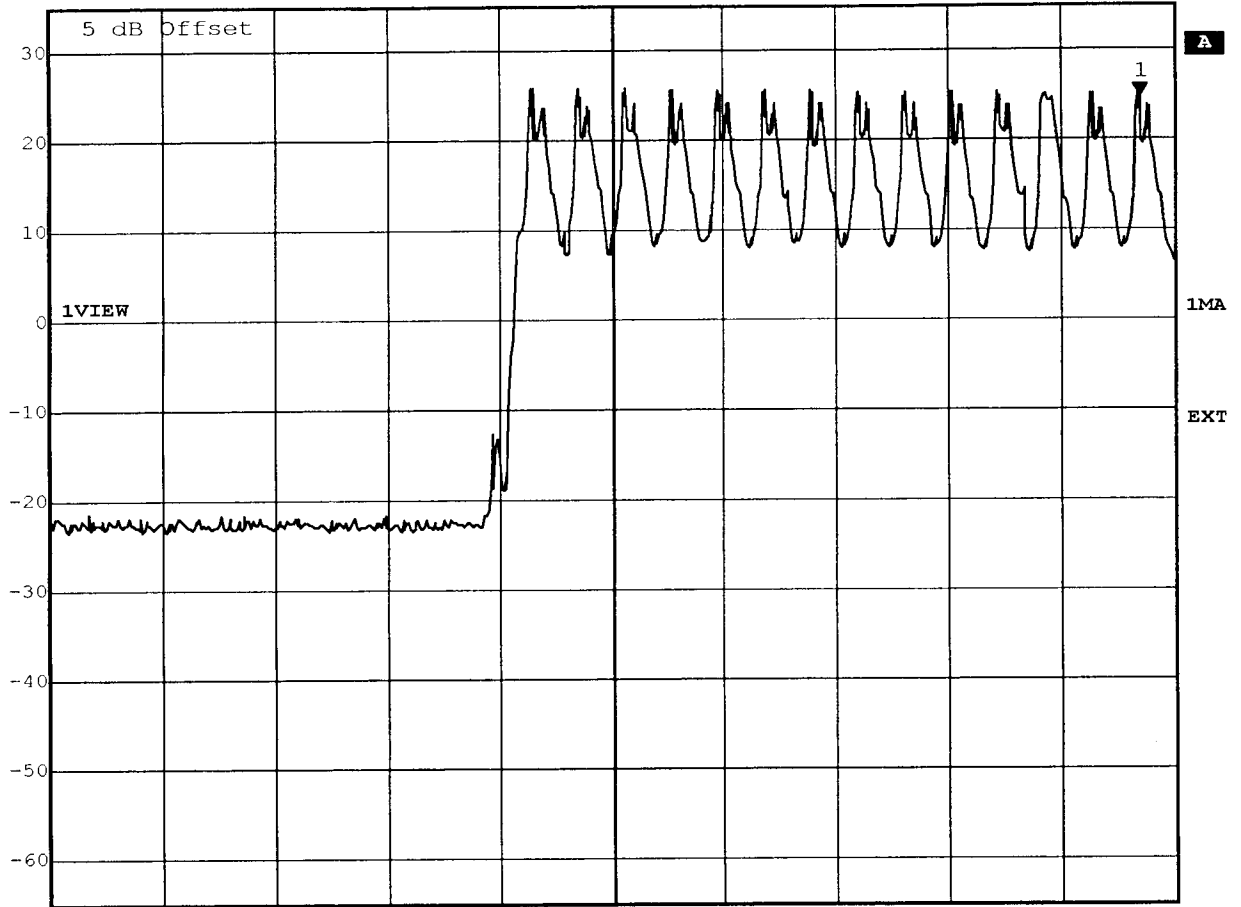


Center 2.402574148 GHz 2.5 MHz/ Span 25 MHz

Title: Number of Hopping Frequencies Ch.: 0-13  
Comment A: GN Netcom Cordless Headset Gn 9050 Base  
Date: 24.OCT.2001 14:50:26




Marker 1 [T1] RBW 50 kHz RF Att 60 dB  
Ref Lvl 24.36 dBm VBW 50 kHz  
35 dBm 2.43904860 GHz SWT 25 ms Unit dBm

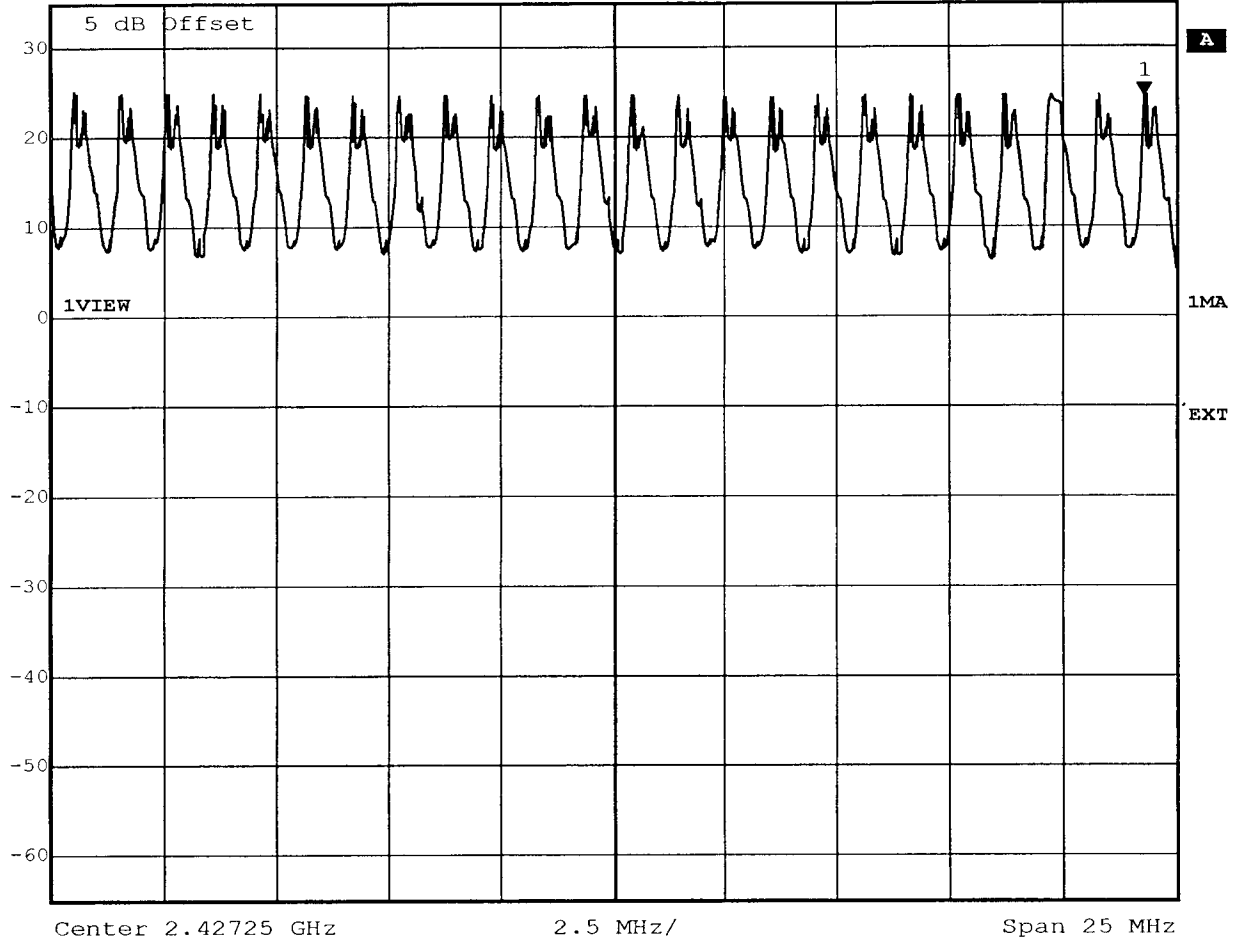

Title: Number of Hopping Frequencies Ch.: 14-37  
Comment A: GN Netcom Cordless Headset Gn 9050 Base  
Date: 24.OCT.2001 15:09:06




Marker 1 [T1]      RBW    50 kHz    RF Att    60 dB  
Ref Lvl            24.72 dBm    VBW    50 kHz  
35 dBm            2.46389830 GHz    SWT    25 ms    Unit            dBm

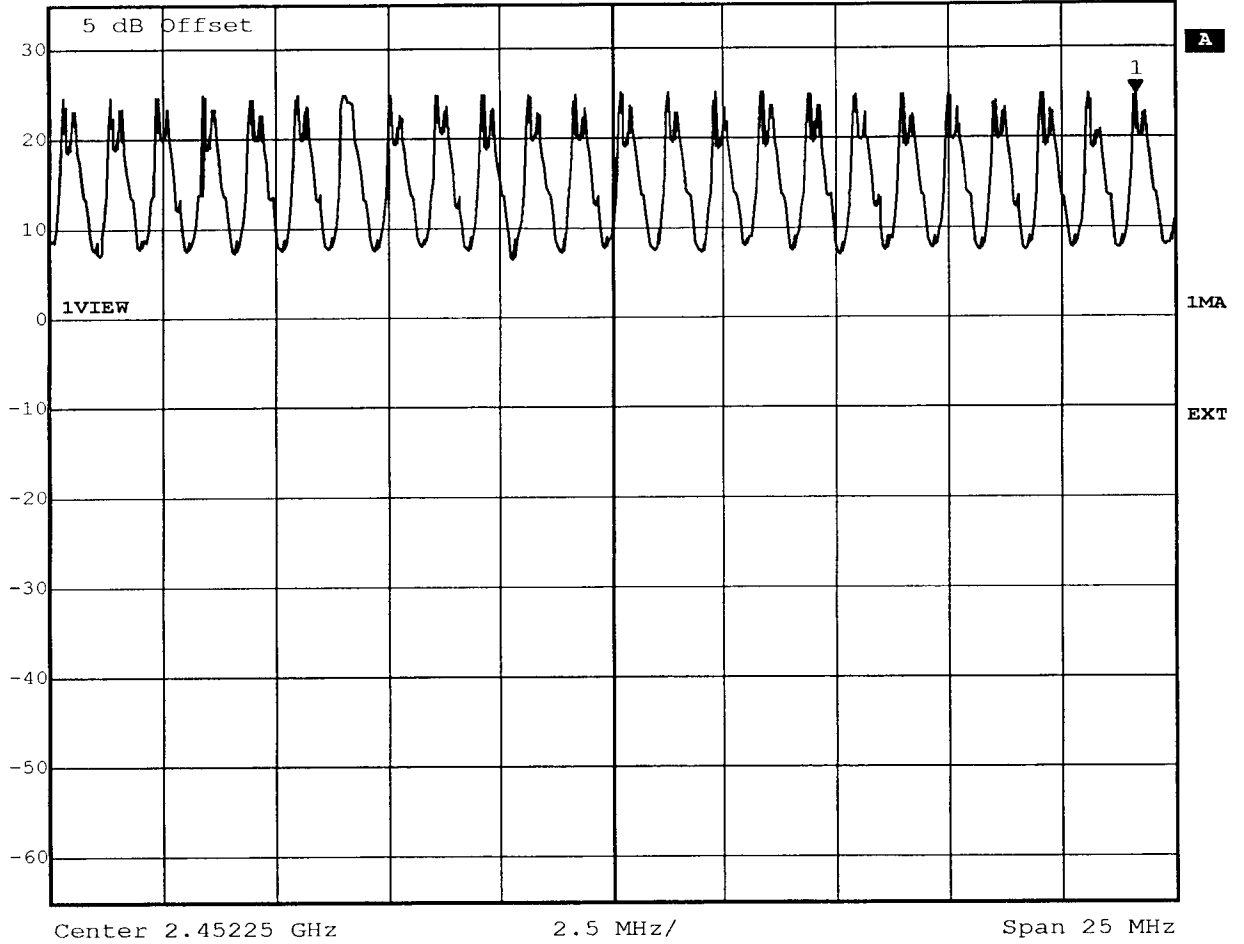

Title:      Number of Hopping Frequencies    Ch.: 38-61  
Comment A: GN Netcom Cordless Headset Gn 9050 Base  
Date:      24.OCT.2001 15:27:44



Marker 1 [T1] RBW 50 kHz RF Att 60 dB  
Ref Lvl 24.79 dBm VBW 50 kHz  
35 dBm 2.46490080 GHz SWT 25 ms Unit dBm

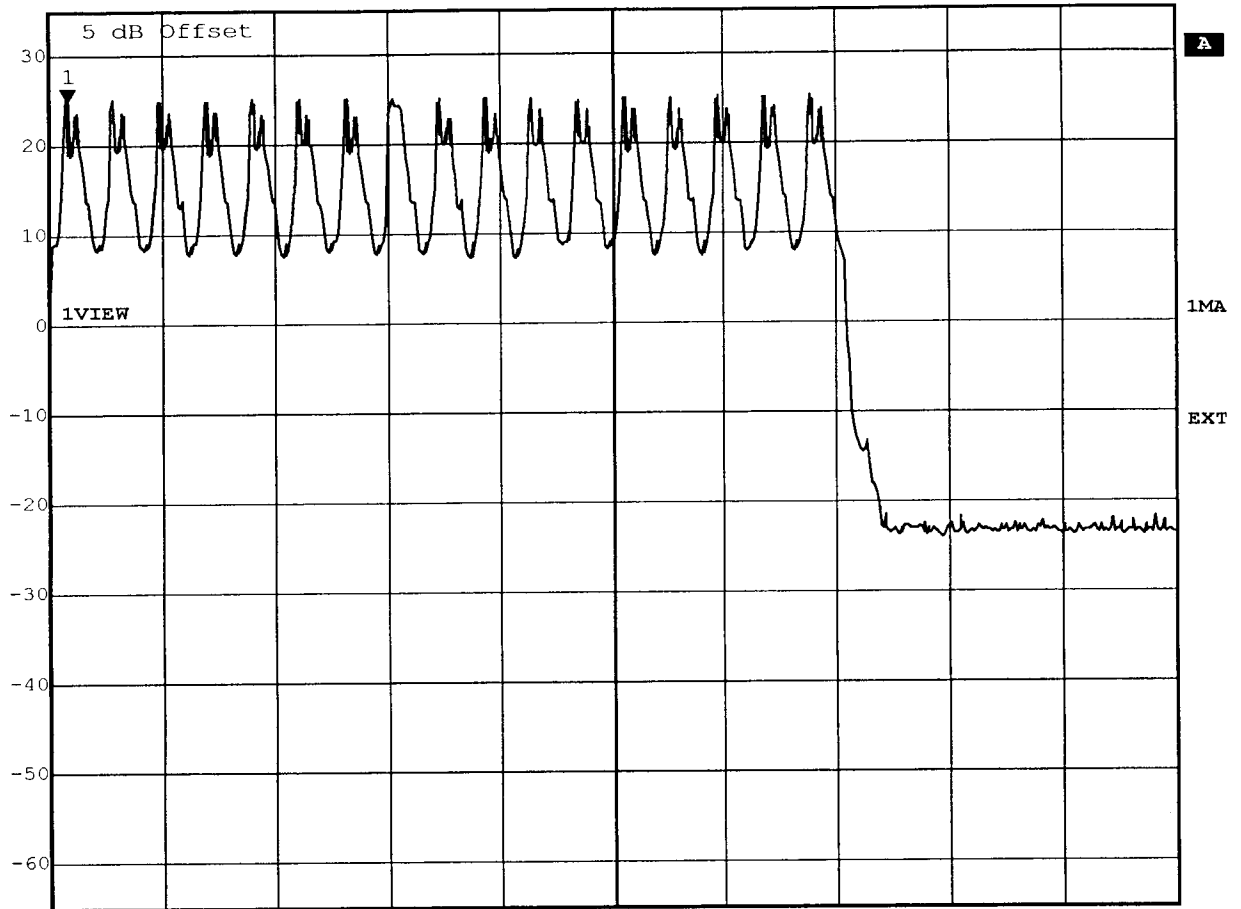

Center 2.477 GHz

2.5 MHz/

Span 25 MHz

Title: Number of Hopping Frequencies Ch.: 62-78  
Comment A: GN Netcom Cordless Headset Gn 9050 Base  
Date: 24.OCT.2001 15:41:38





## Appendix G

Time of Occupancy (Dwell Time)



Delta 2 [T1]

RBW 1 MHz

RF Att 30 dB

Ref Lvl

1.72 dB

VBW 1 MHz


30 dBm

11.164128 ms

SWT 19.5 ms

Unit

dBm

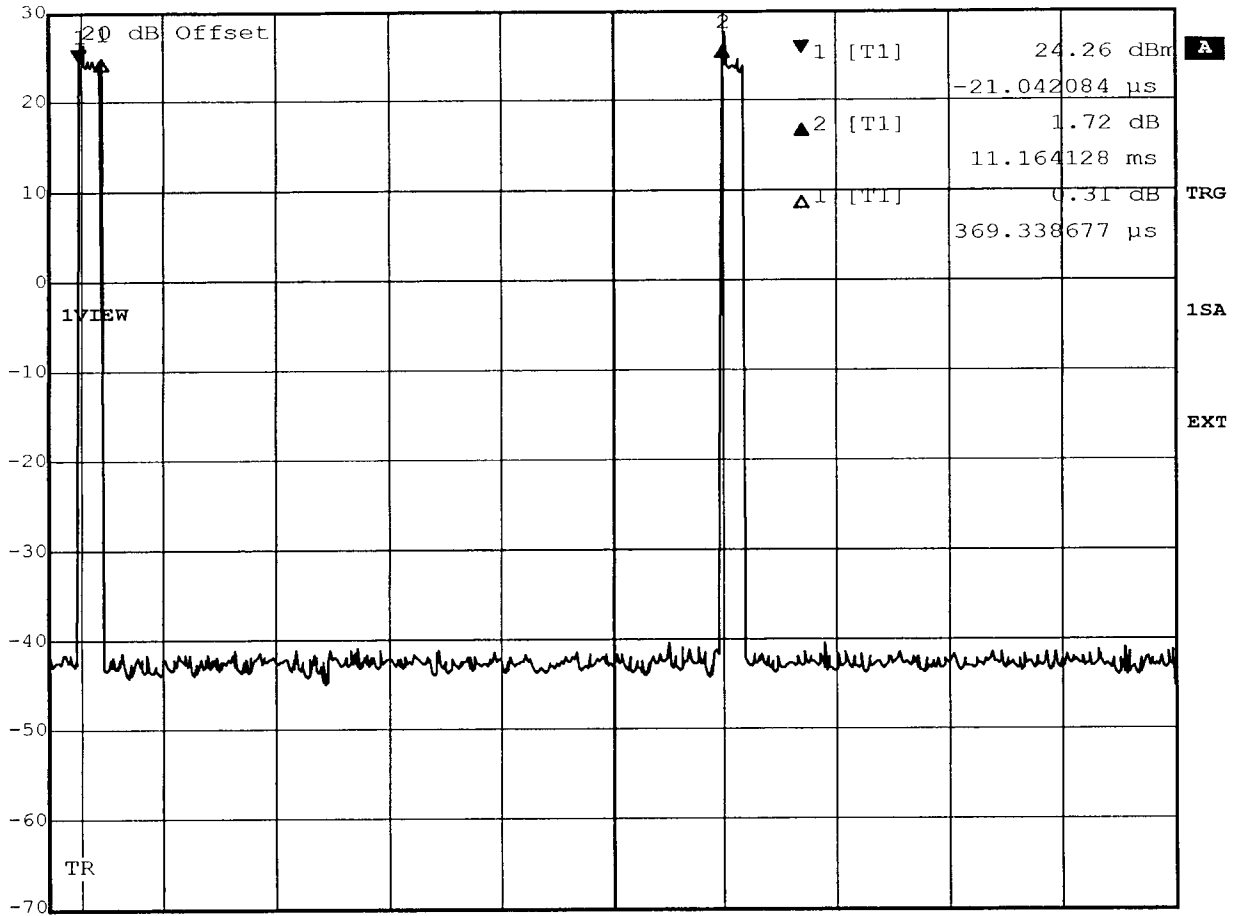

Center 2.441 GHz

1.95 ms/

Title: Dwell Time

Comment A: GN Netcom Cordless Headset Gn 9050 Base

Date: 24.OCT.2001 13:50:51




## Appendix H

20dB Bandwidth




Delta 1 [T1] RBW 10 kHz RF Att 60 dB  
Ref Lvl -0.30 dB VBW 10 kHz  
38 dBm 895.79158317 kHz SWT 76 ms Unit dBm

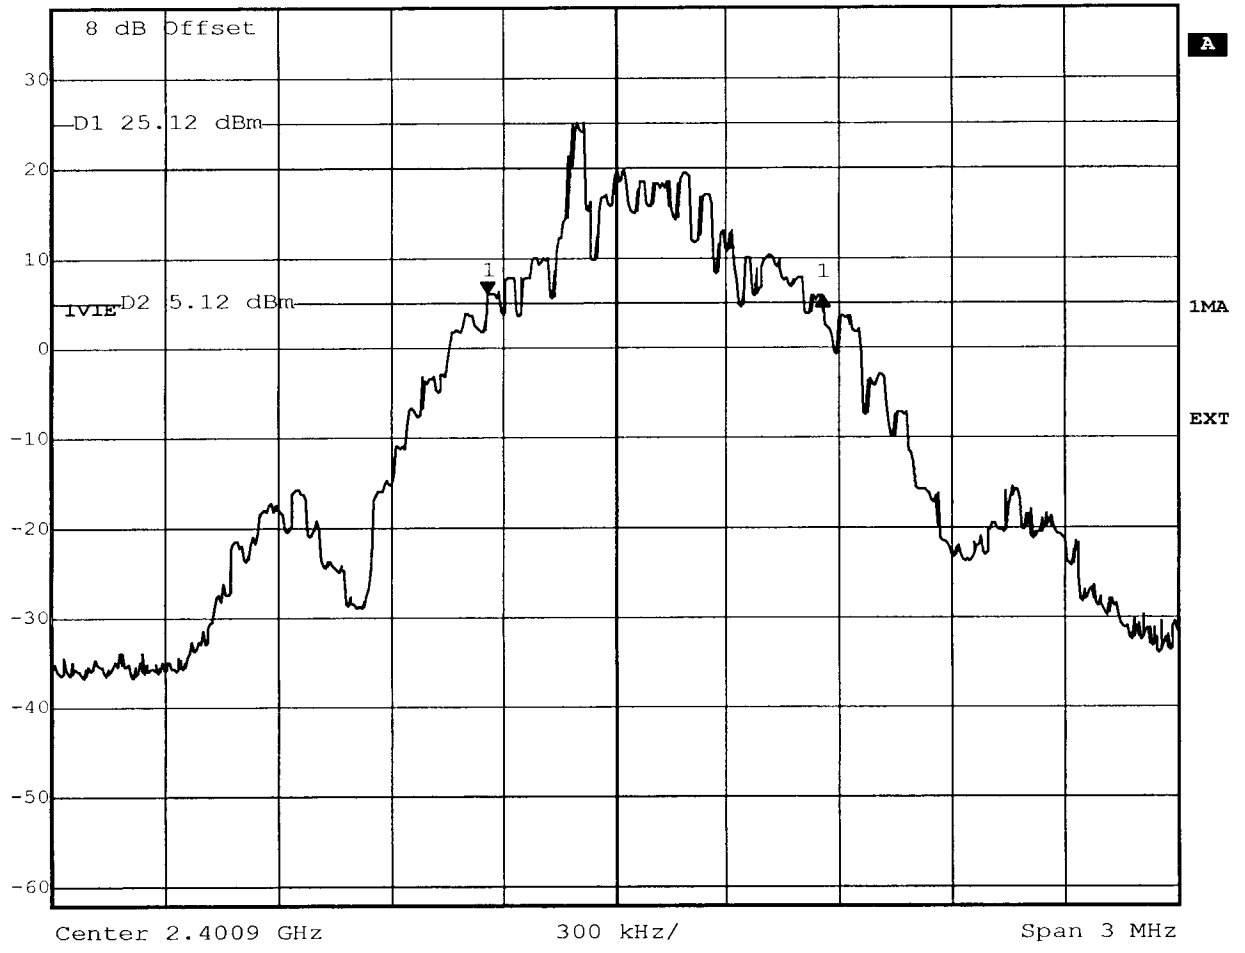

Title: 20 dB Bandwidth Ch.: 0  
Comment A: GN Netcom Cordless Headset Gn 9050 Base  
Date: 24.OCT.2001 13:18:07




Delta 1 [T1] RBW 10 kHz RF Att 60 dB  
Ref Lvl 0.05 dB VBW 10 kHz  
38 dBm 901.80360722 kHz SWT 76 ms Unit dBm

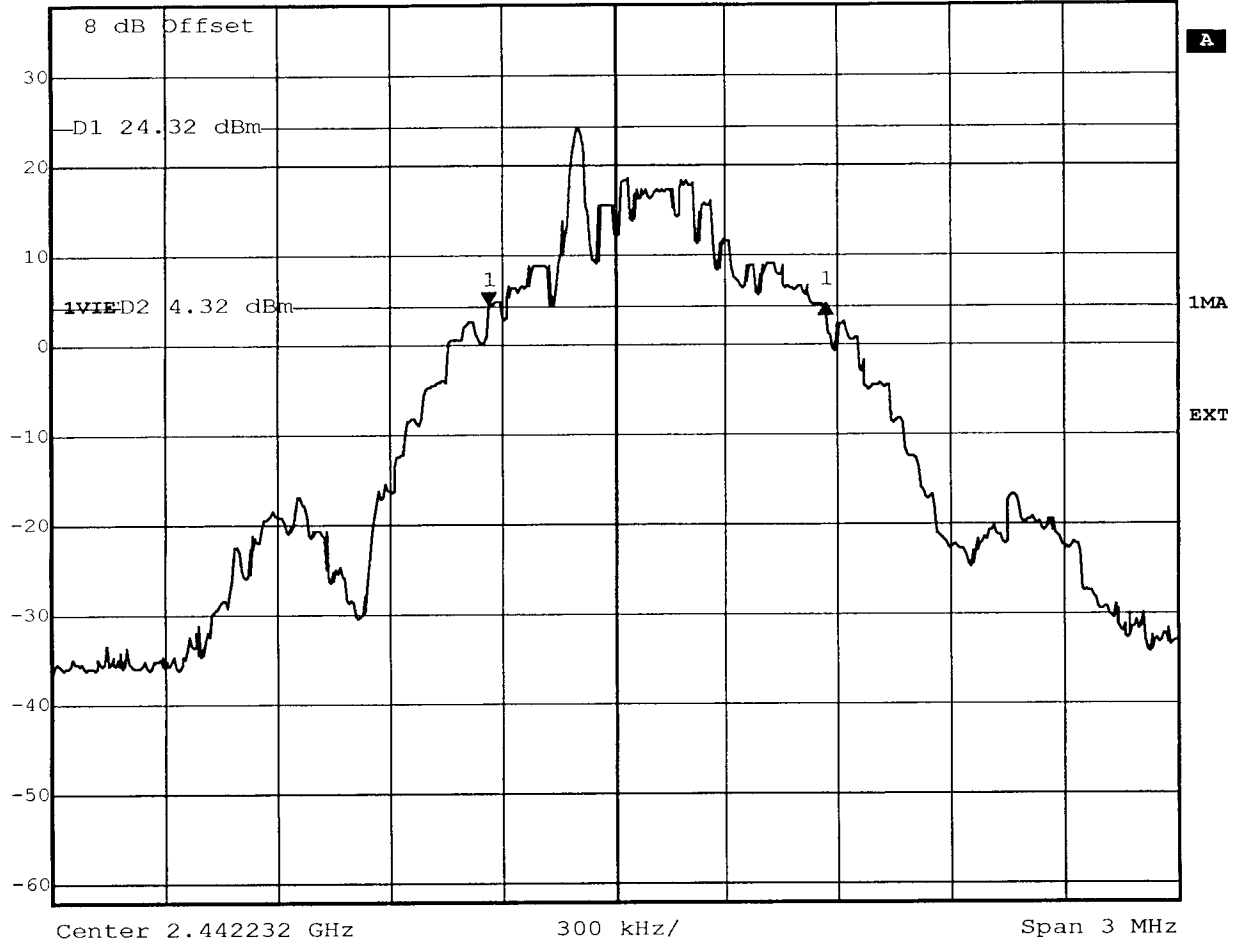

Title: 20 dB Bandwidth Ch.: 40  
Comment A: GN Netcom Cordless Headset Gn 9050 Base  
Date: 24.OCT.2001 13:15:01



Delta 1 [T1] RBW 10 kHz RF Att 60 dB  
Ref Lvl -0.31 dB VBW 10 kHz  
38 dBm 883.76753507 kHz SWT 76 ms Unit dBm

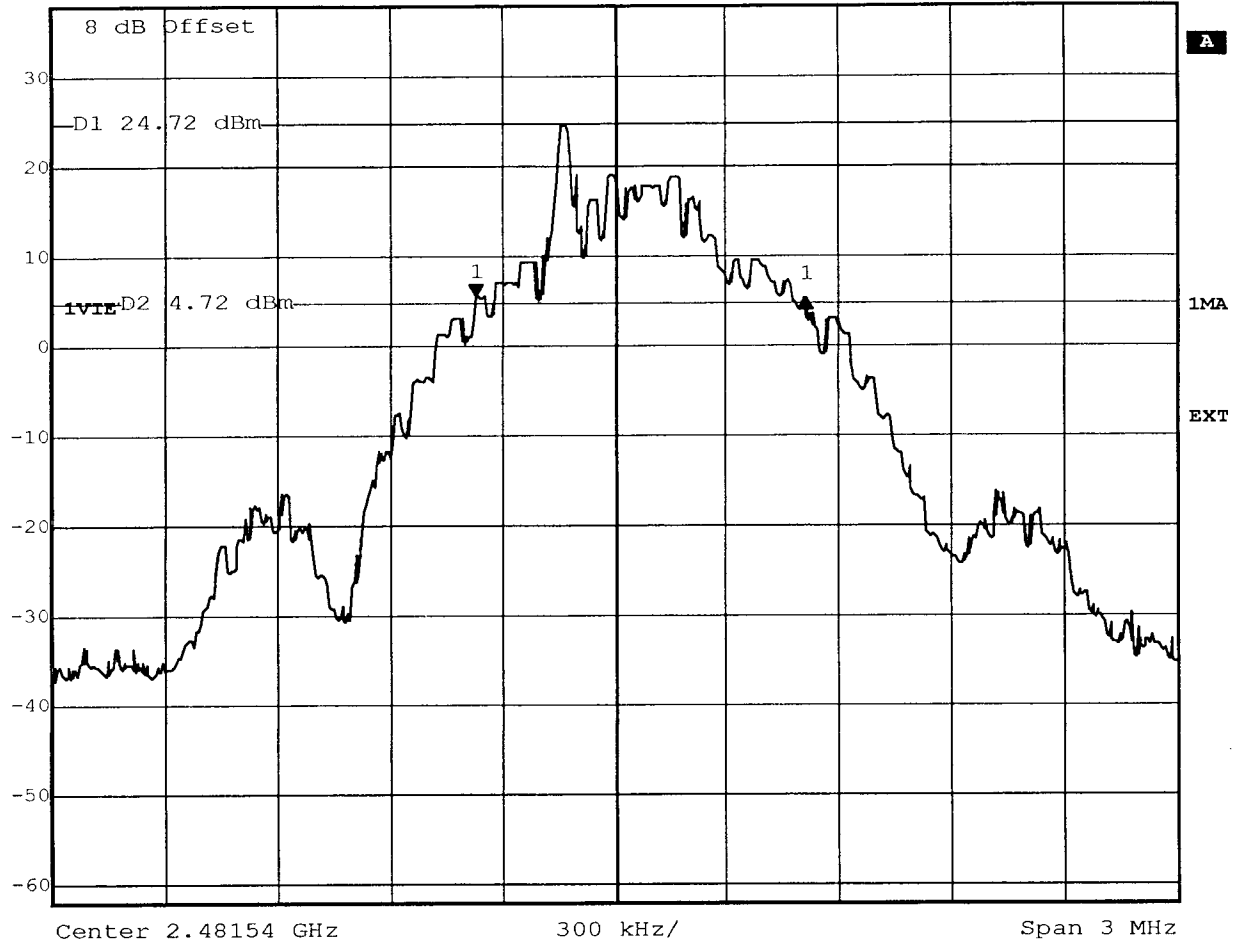

Title: 20 dB Bandwidth Ch.: 78  
Comment A: GN Netcom Cordless Headset Gn 9050 Base  
Date: 24.OCT.2001 13:25:57




## Appendix I

Band-edge Compliance of RF Emissions



Marker 1 [T1] RBW 50 kHz RF Att 60 dB  
Ref Lvl 5.61 dBm VBW 50 kHz  
35 dBm 2.40048697 GHz SWT 5 ms Unit dBm

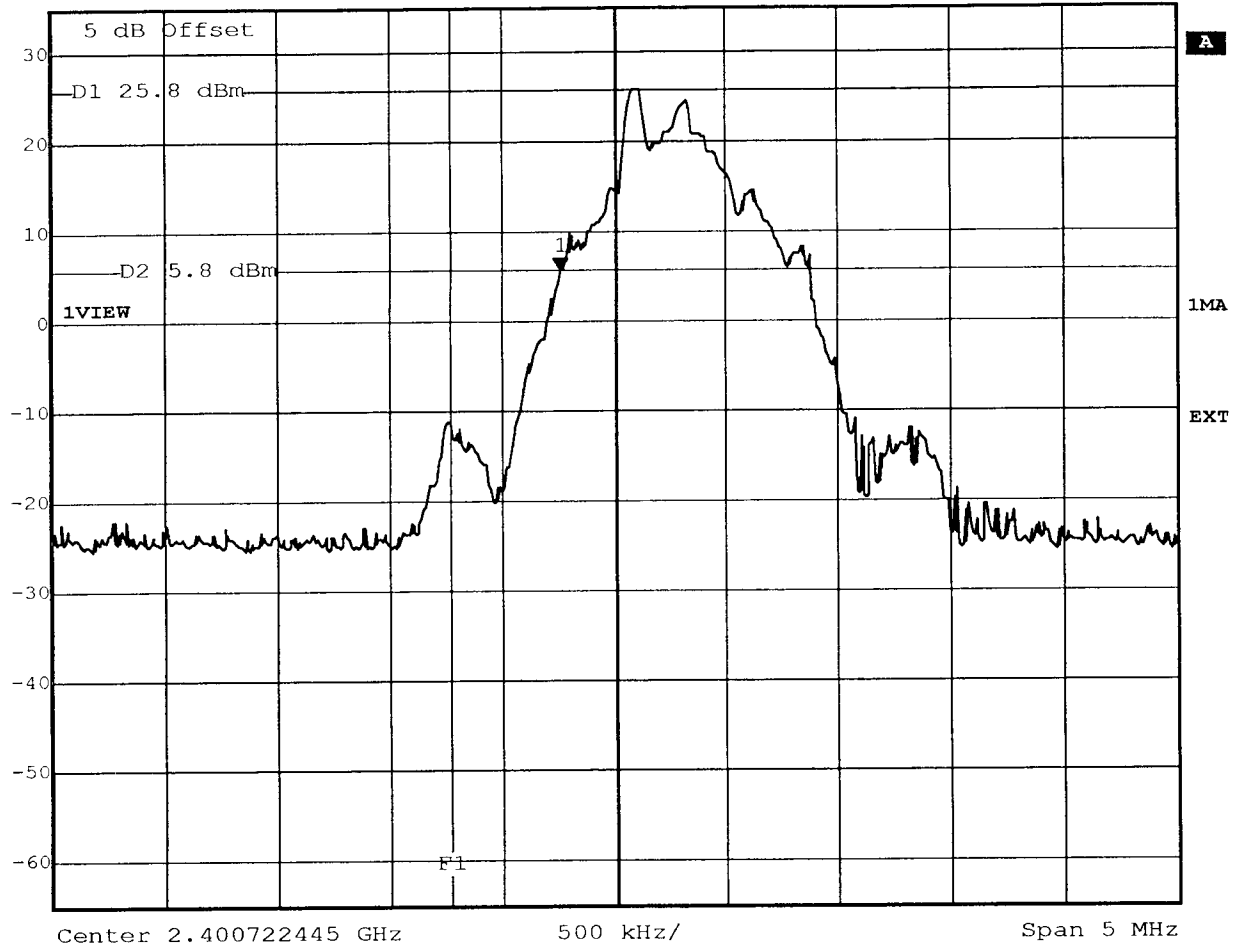


Title: Band-edge Compliance of RF Conducted Emissions Ch.: 0  
Comment A: GN Netcom Cordless Headset Gn 9050 Base  
Date: 24.OCT.2001 13:42:14





Marker 1 [T1] RBW 50 kHz RF Att 60 dB  
Ref Lvl 4.93 dBm VBW 50 kHz  
35 dBm 2.48220849 GHz SWT 5 ms Unit dBm

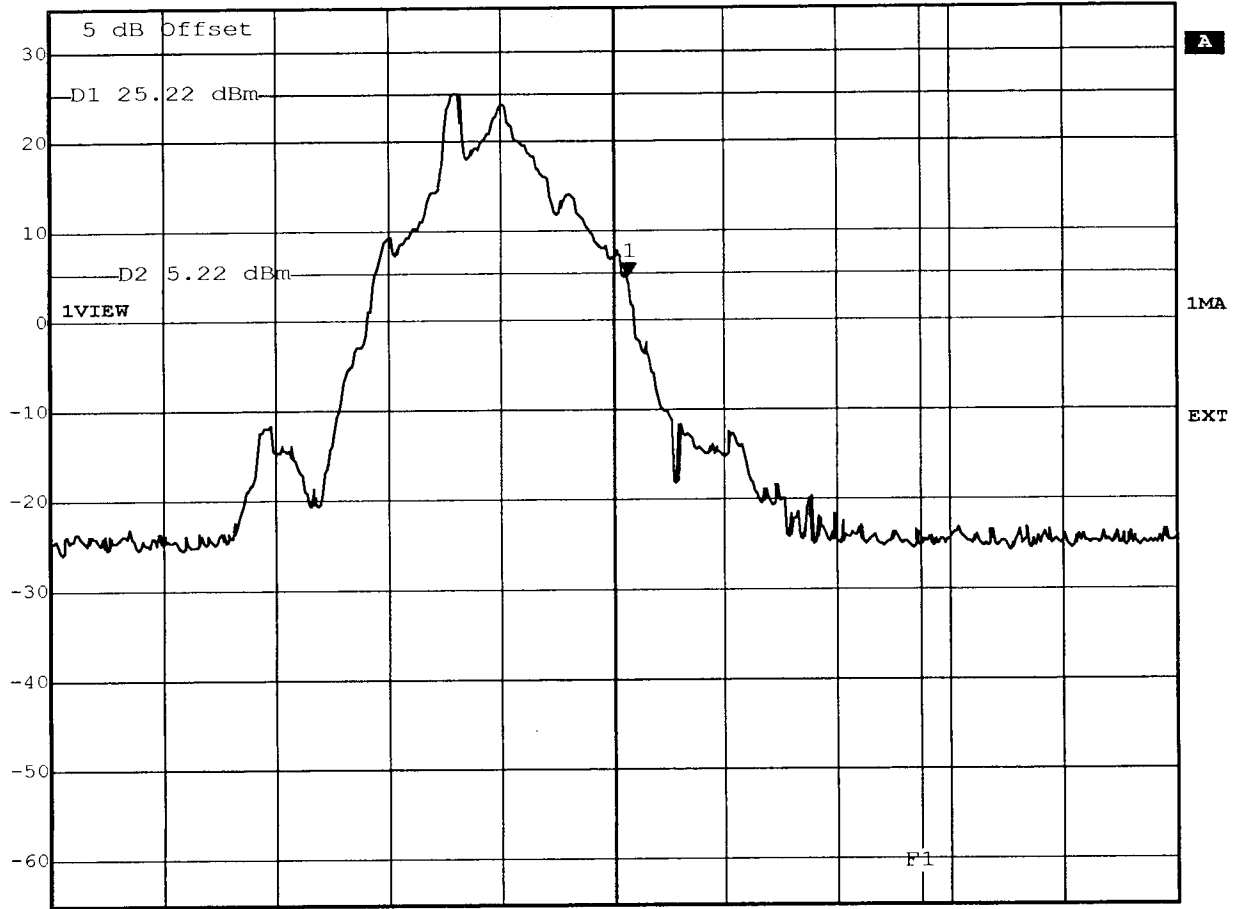

Center 2.482133342 GHz 500 kHz/ Span 5 MHz

Title: Band-edge Compliance of RF Conducted Emissions Ch.: 78  
Comment A: GN Netcom Cordless Headset Gn 9050 Base  
Date: 24.OCT.2001 13:38:13



## Appendix J

Conducted Measurement at (AC) Power Line

**EMI voltage test in the ac-mains according to FCC part 15**

EUT: CORDLESS HEADPHONE  
 Manufacturer: GN NETCOM .INC  
 Operating Condition: Unom: 110VAC(AC/DC adaptor), Tnom: 23°C  
 Test Site: ETS  
 Operator: Mr. Marquardt  
 Test Specification: V-Network: ESH3-Z5  
 Comment: model: GN 9050 mode: charging

