



**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 196.253MHz, Emax: 30.16dBµV/m, RBW: 100kHz

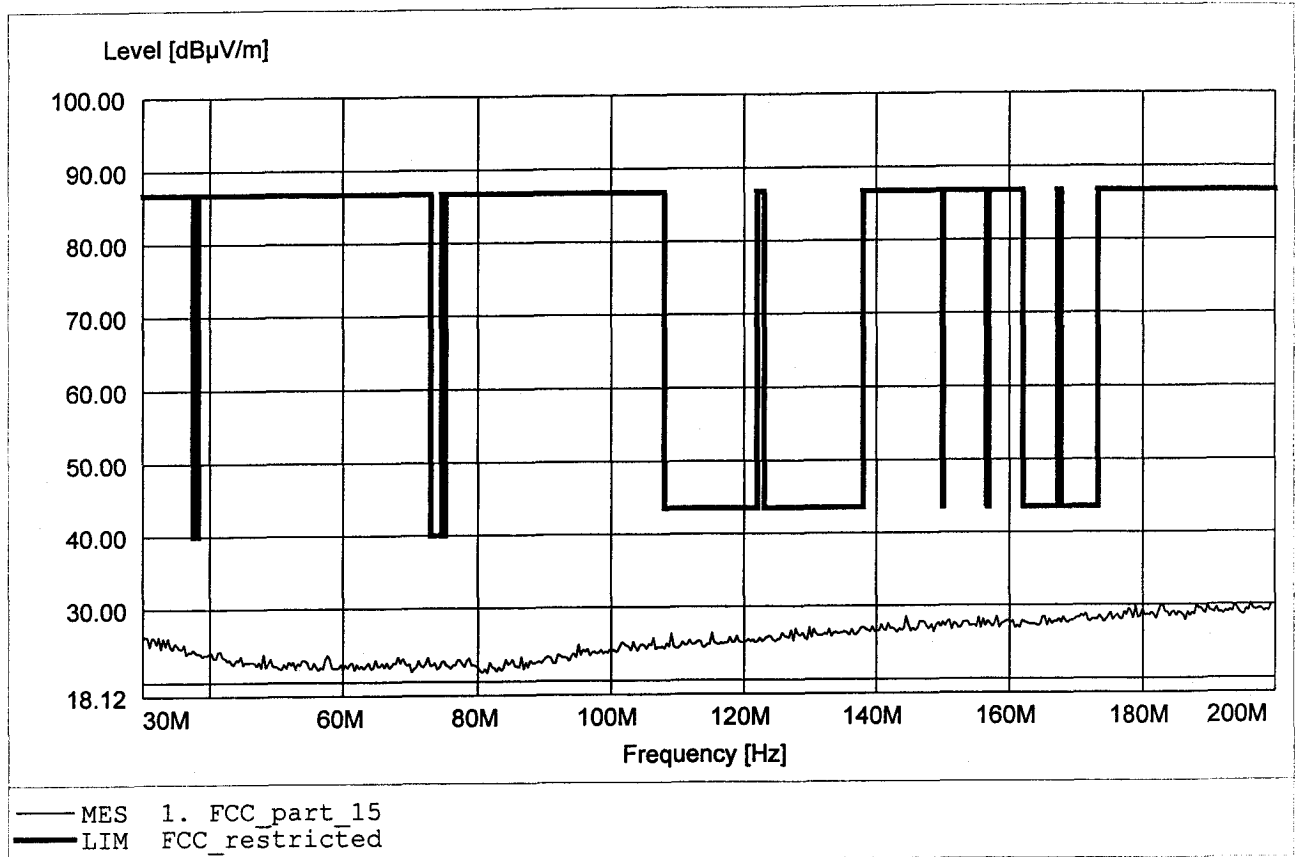


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 198.637MHz, Emax: 29.86dBµV/m, RBW: 100kHz

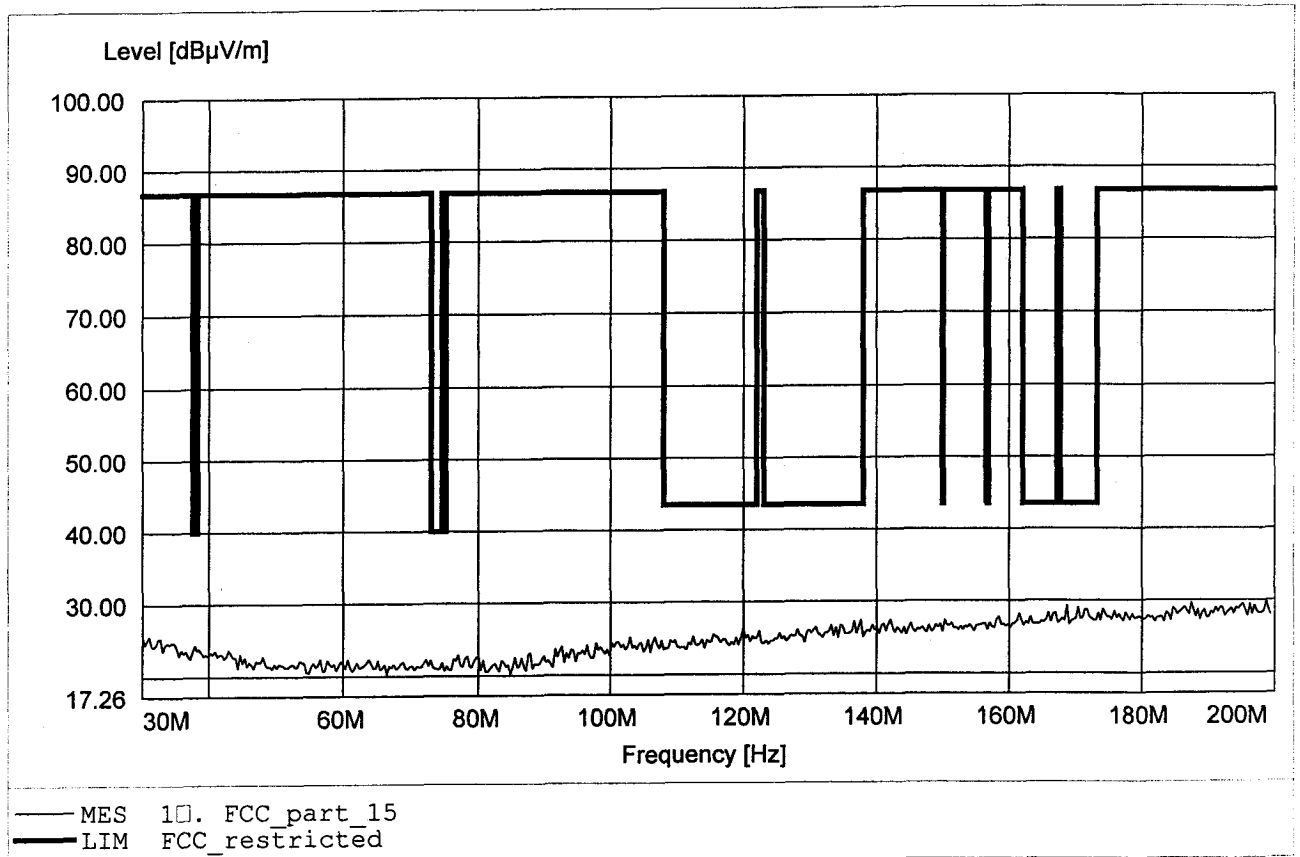


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 990.381MHz, Emax: 22.82dBµV/m, RBW: 100kHz

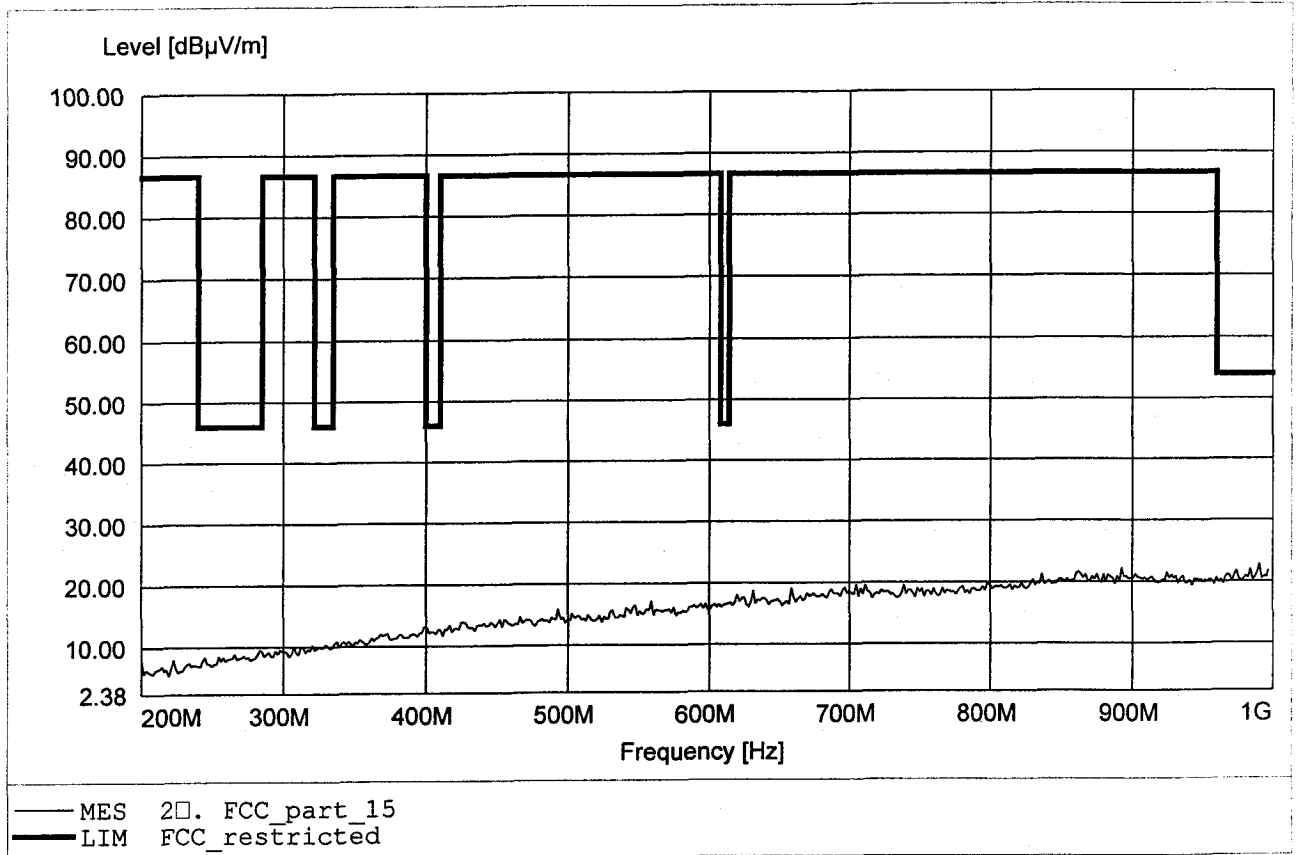


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 897.395MHz, Emax: 22.12dBµV/m, RBW: 100kHz

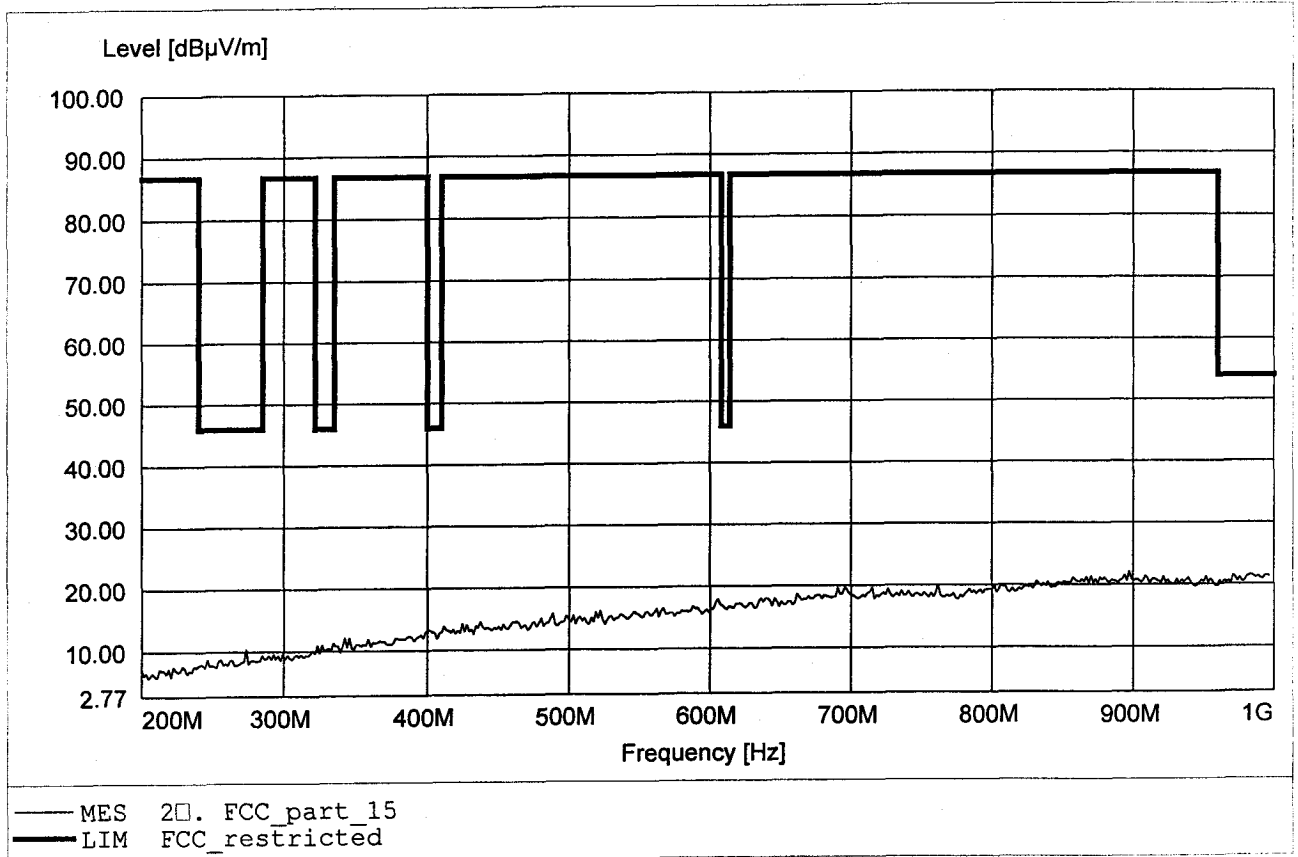


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 90.52dBµV/m, RBW: 1MHz

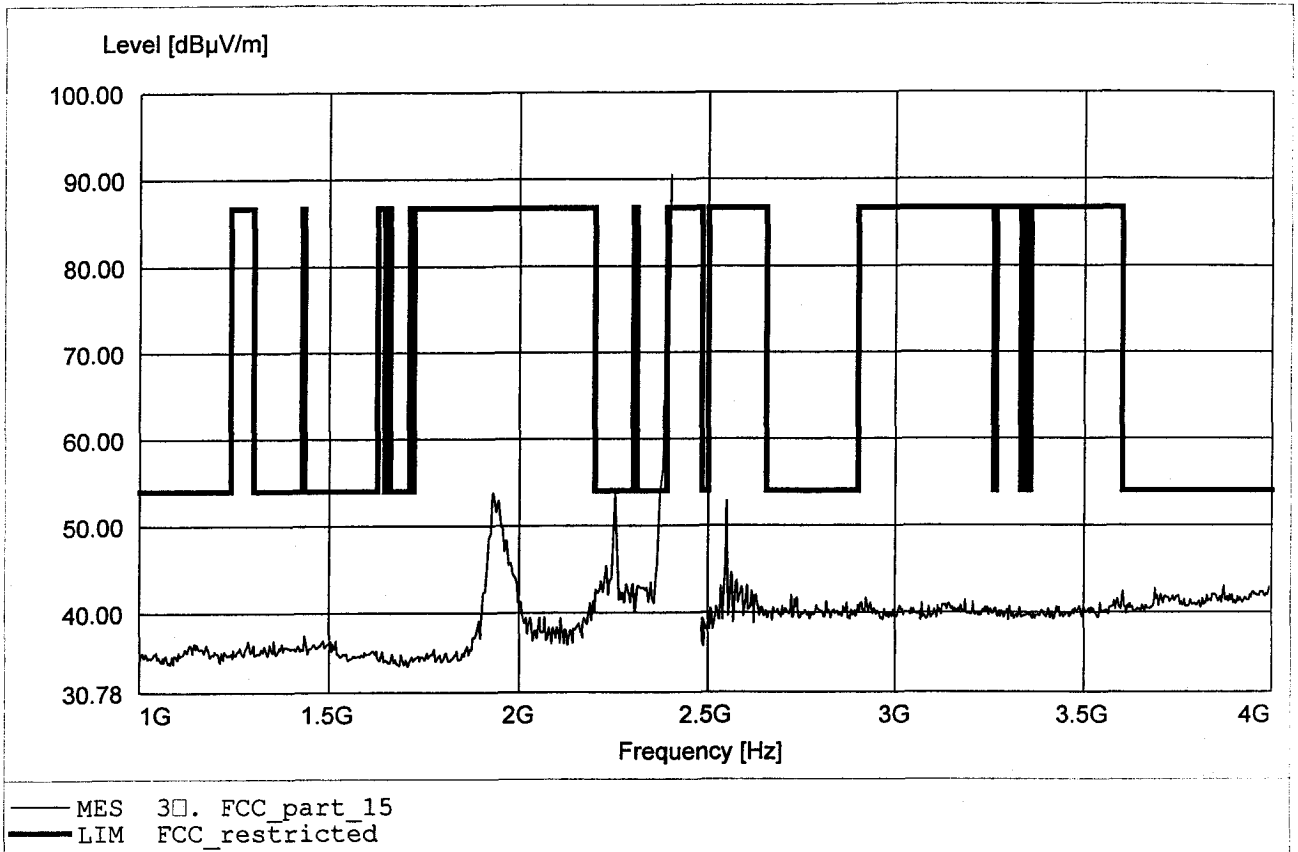


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 63.26dBµV/m, RBW: 1MHz

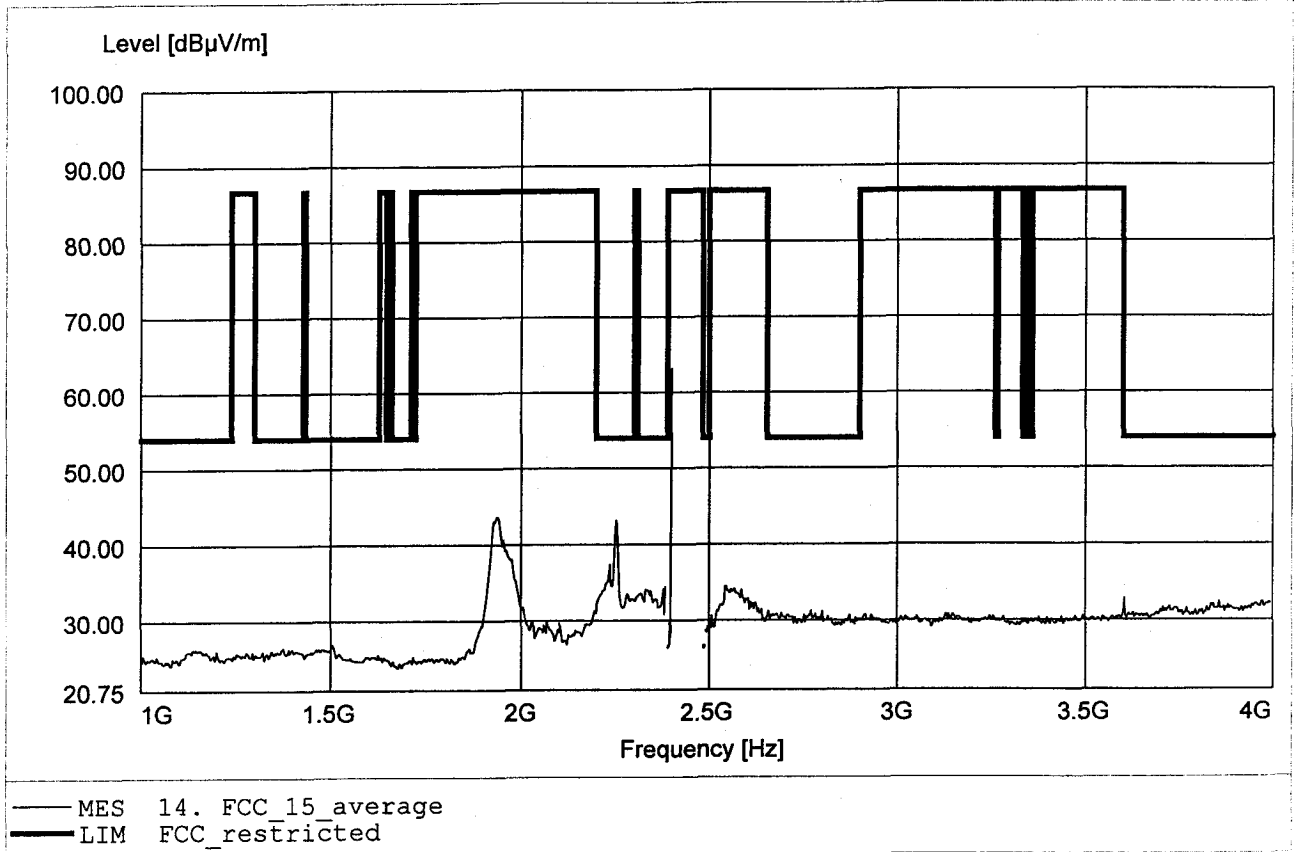


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 0
 Model: GN9120 2G4 FCC
 Approval Holder: GnNetcom
 Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
 Test Site / Operator: ETS / Mr. Hoppe
 Test Specification: according to §15.247, average detector
 Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
 Comment 2: Freq: 2.400GHz, Emax: 63.26dBµV/m, RBW: 1MHz

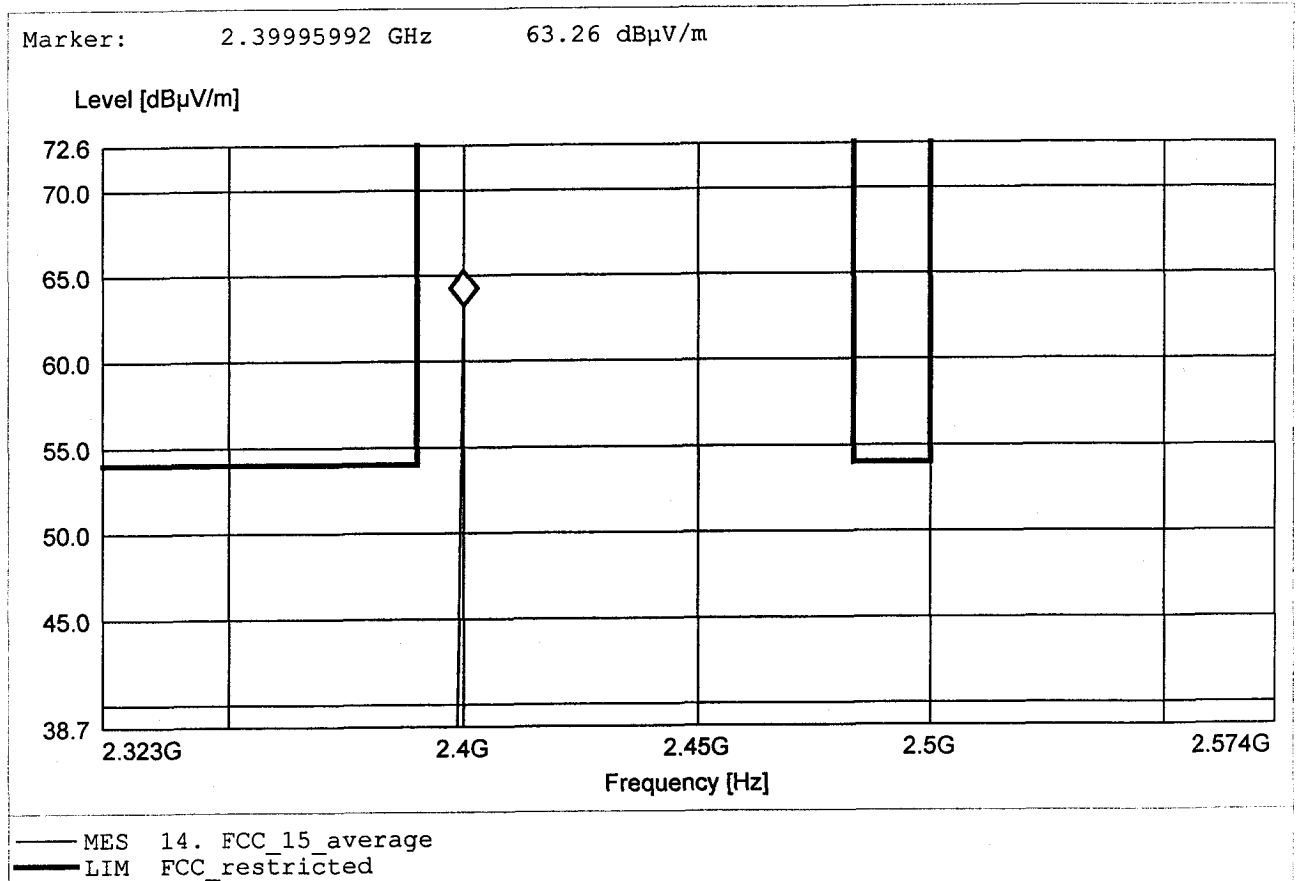


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 90.27dBµV/m, RBW: 1MHz

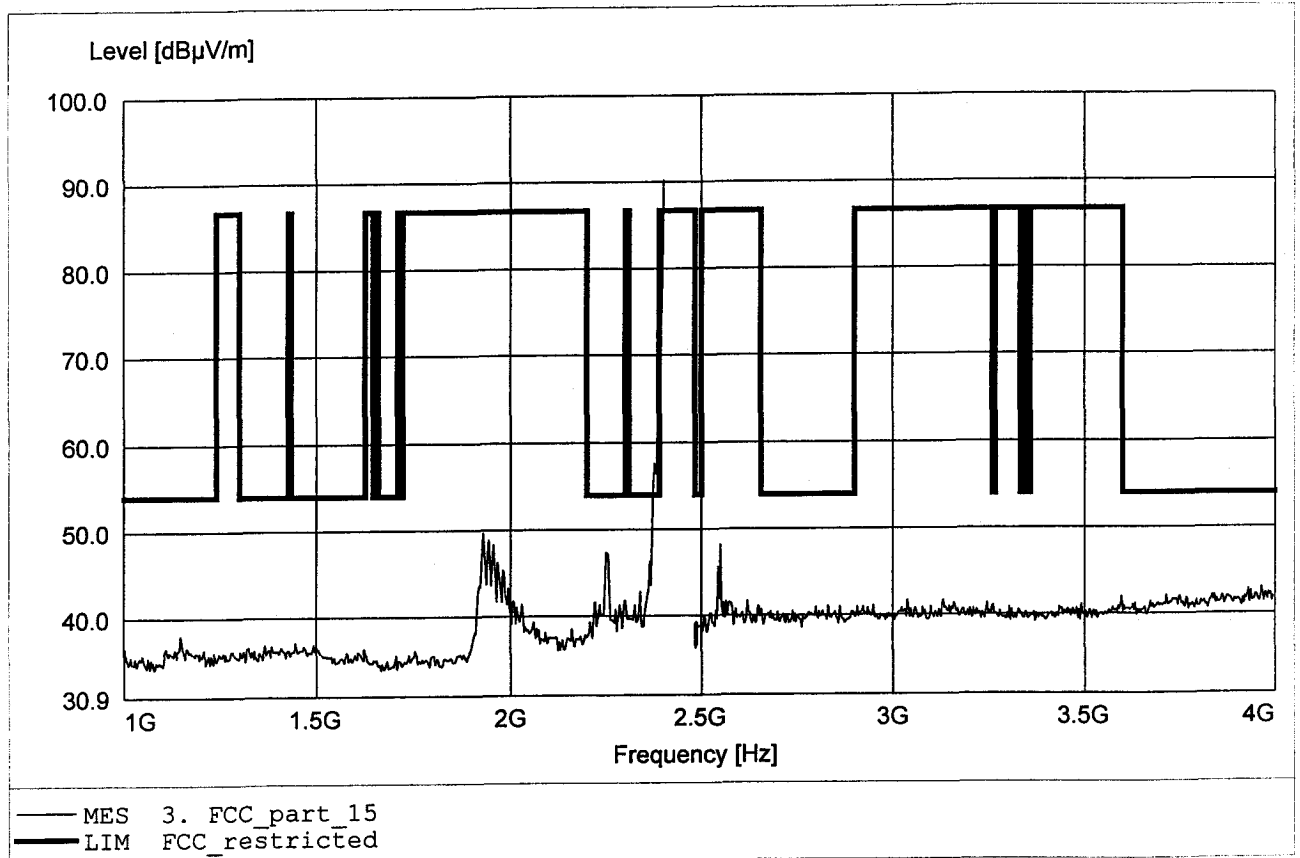


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 62.72dBμV/m, RBW: 1MHz

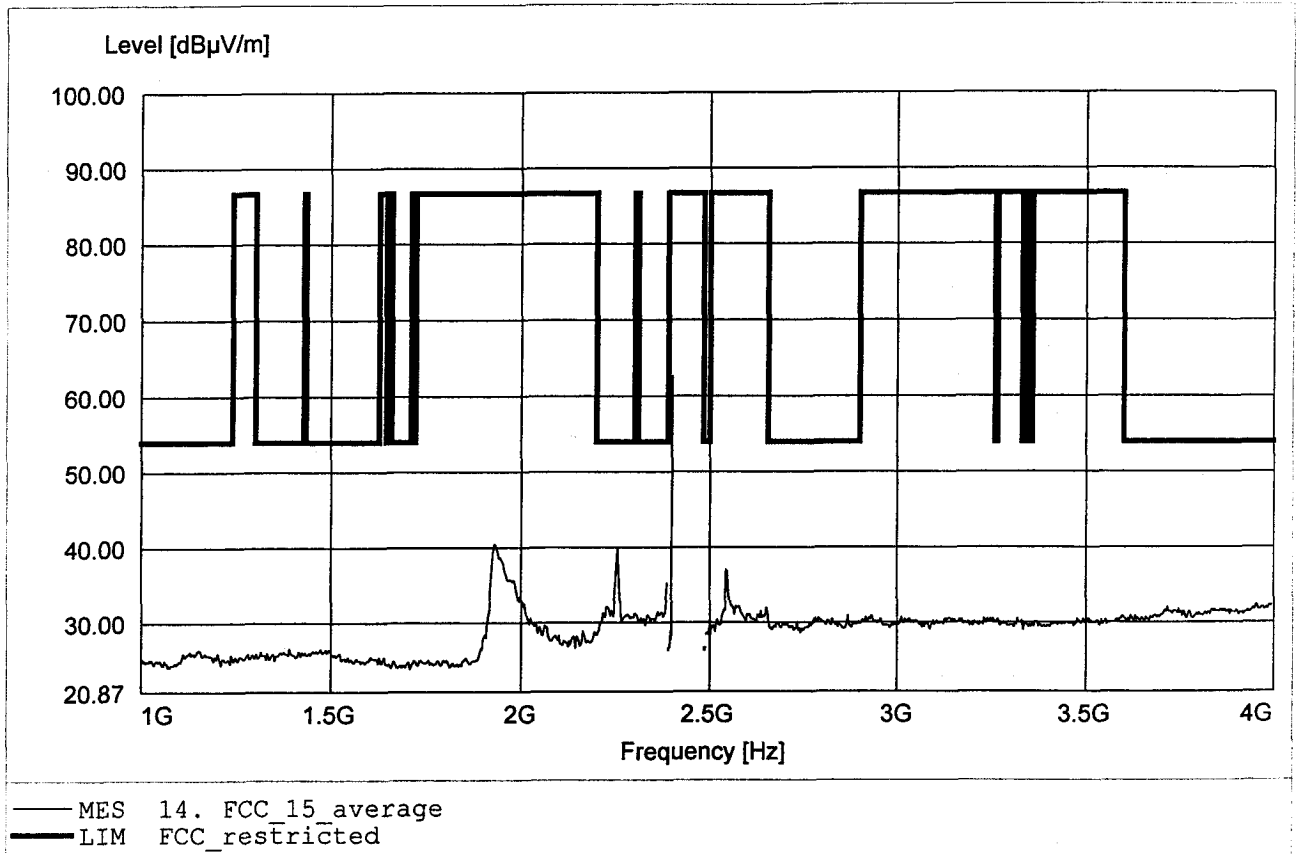


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 0
 Model: GN9120 2G4 FCC
 Approval Holder: GnNetcom
 Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
 Test Site / Operator: ETS / Mr. Hoppe
 Test Specification: according to §15.247, average detector
 Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
 Comment 2: Freq: 2.400GHz, Emax: 62.72dBµV/m, RBW: 1MHz

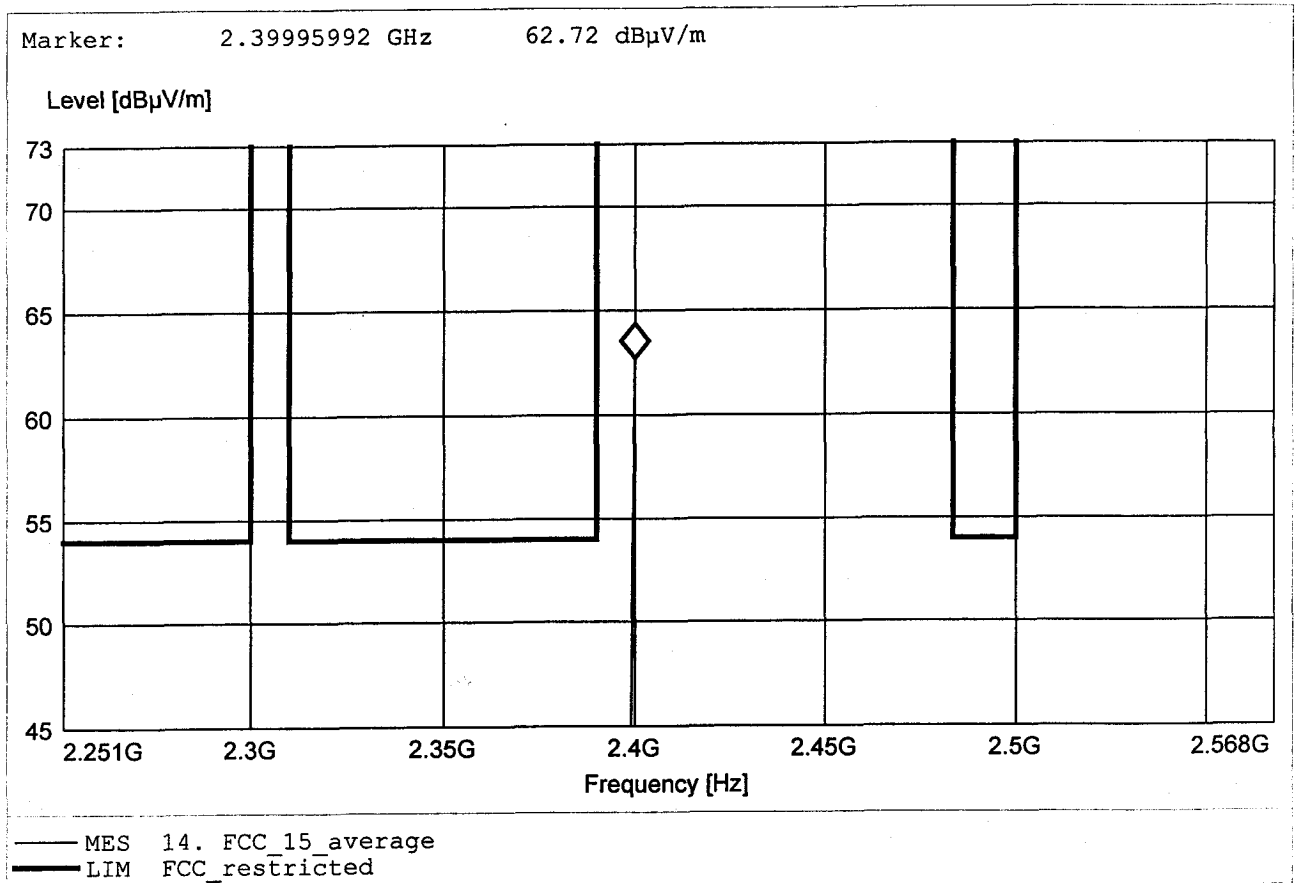


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 7.206GHz, Emax: 55.59dBµV/m, RBW: 1MHz

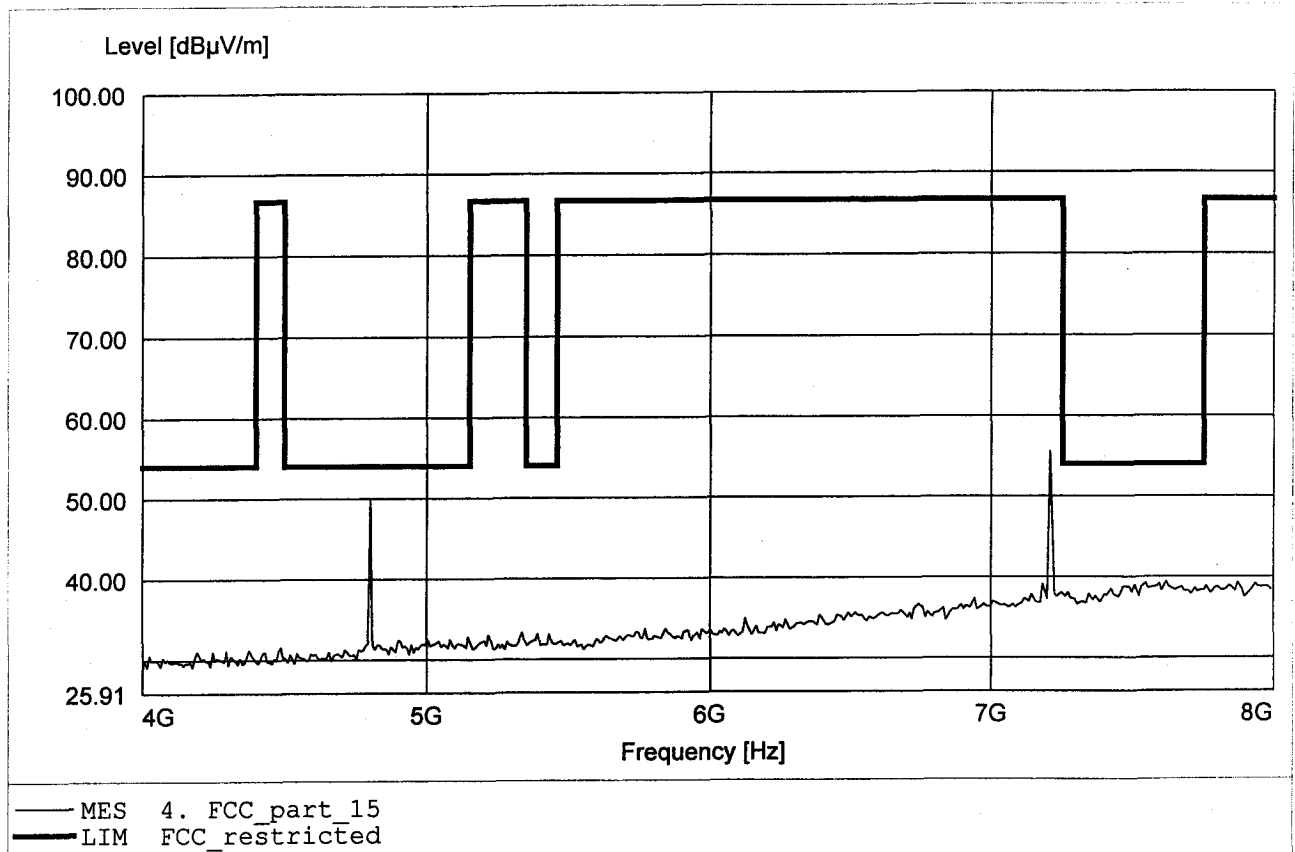


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 7.206GHz, Emax: 54.46dBµV/m, RBW: 1MHz

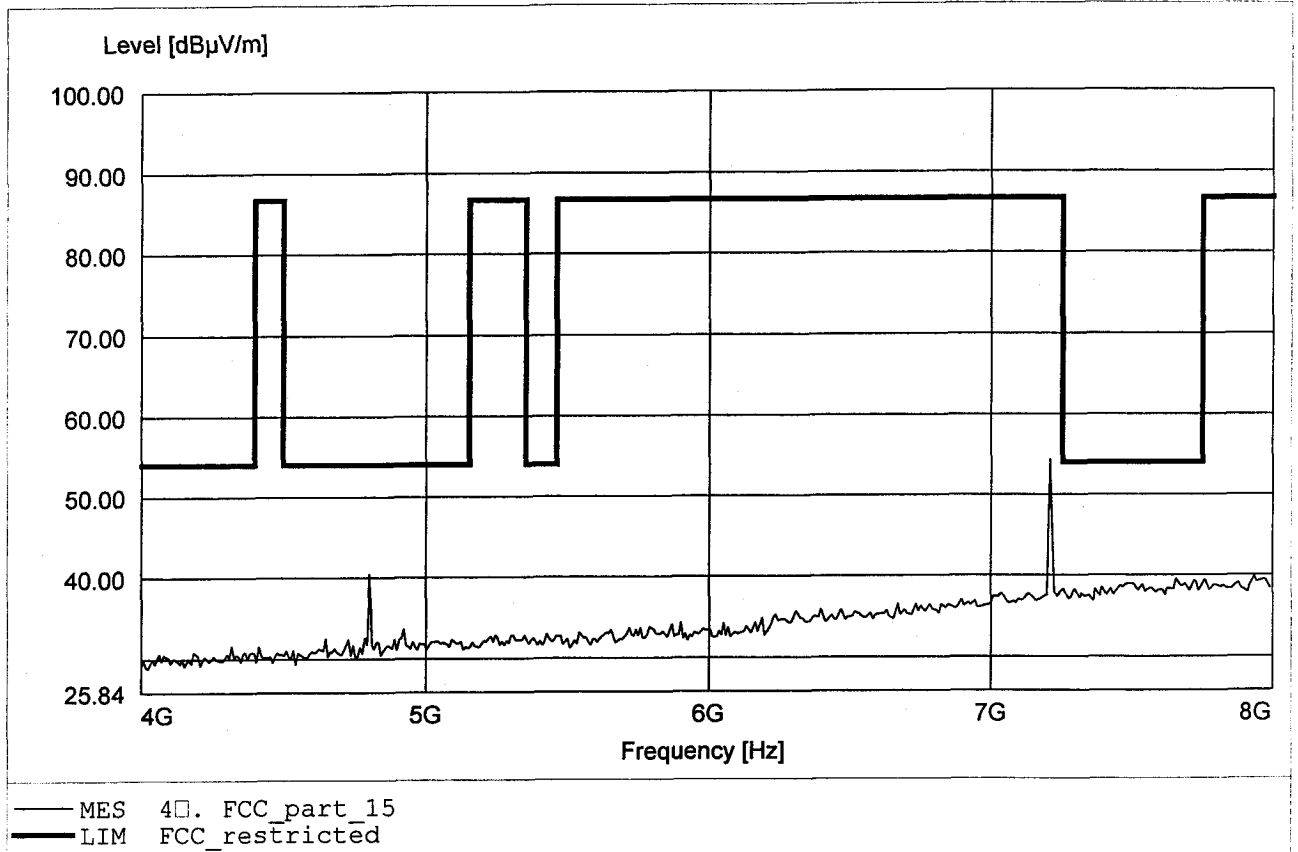


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 9.603GHz, Emax: 55.05dBµV/m, RBW: 1MHz

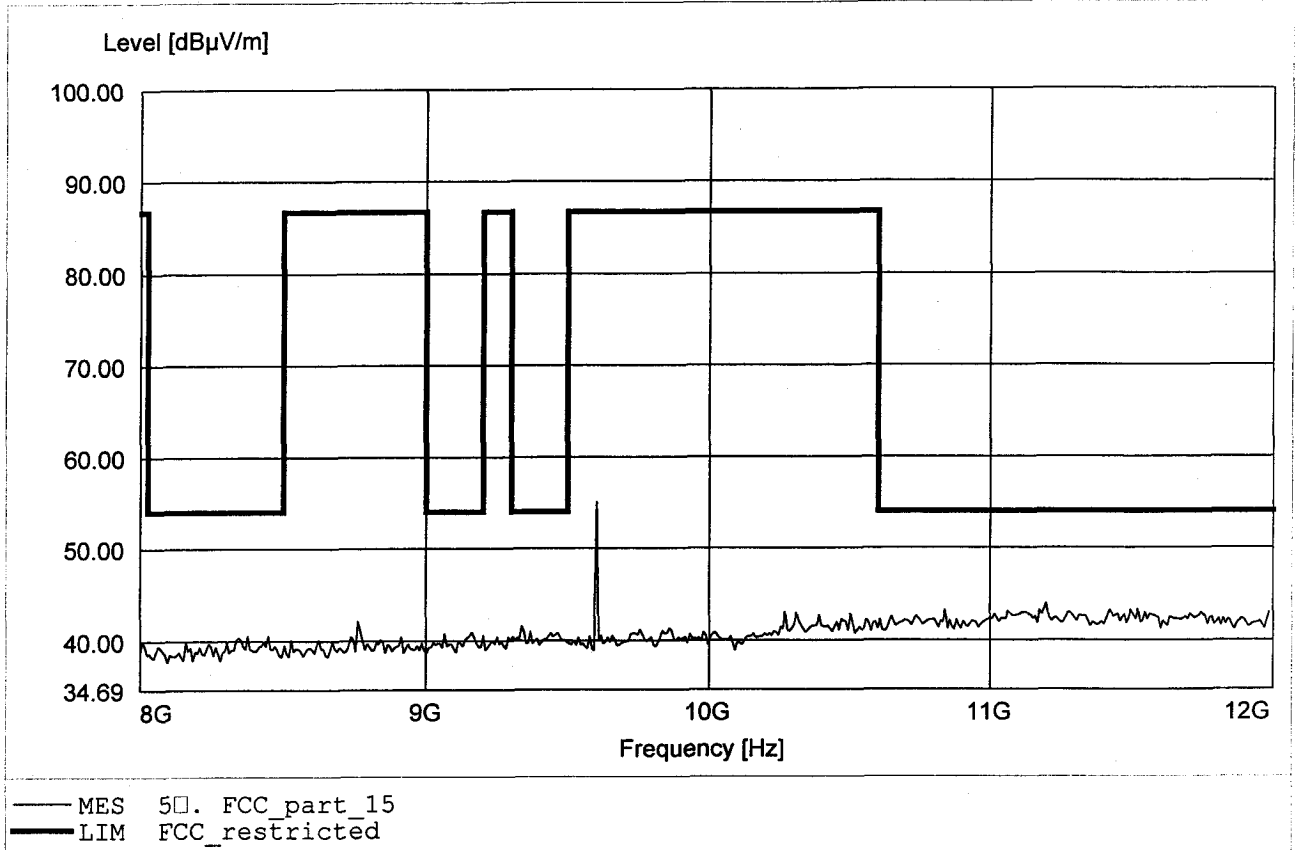


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 9.603GHz, Emax: 55.95dBµV/m, RBW: 1MHz

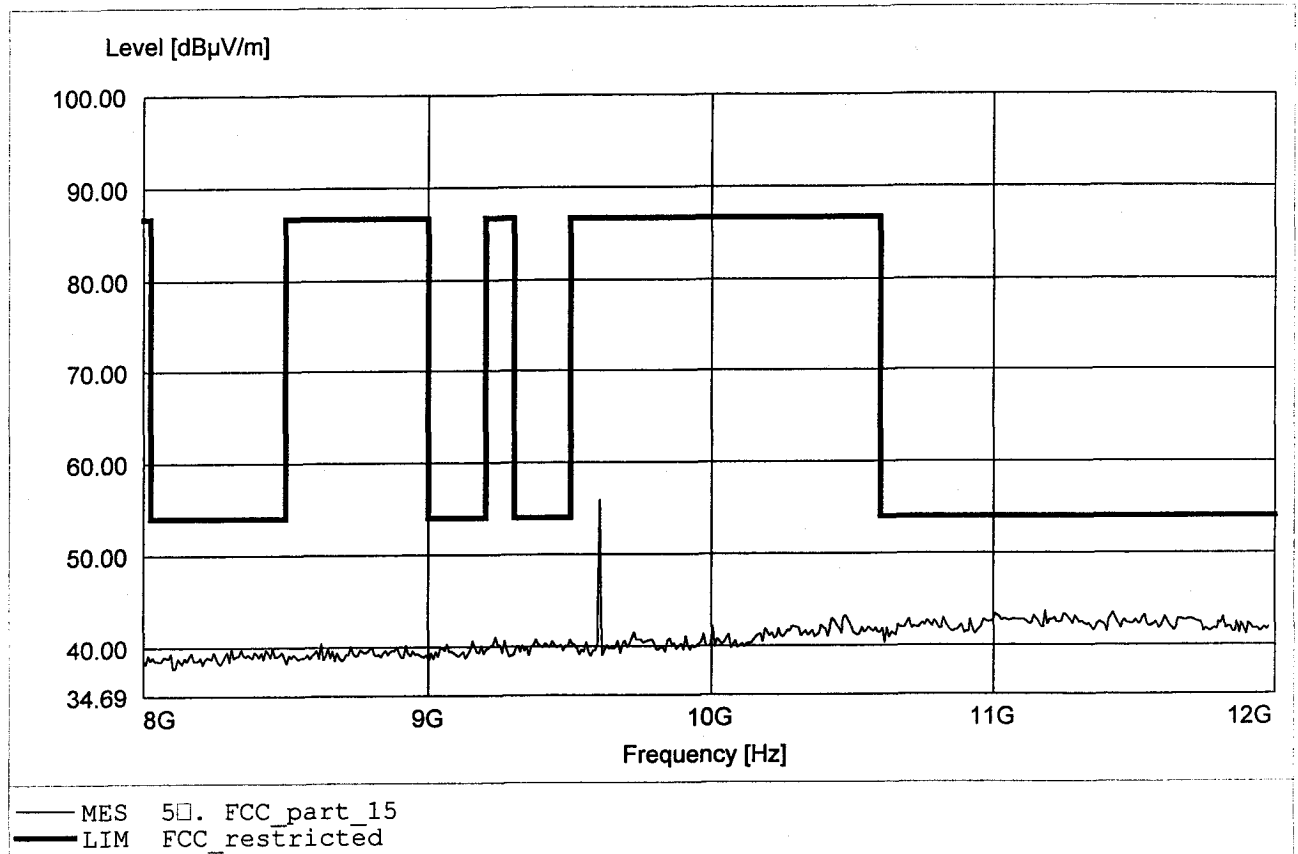


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 14.405GHz, Emax: 51.94dBµV/m, RBW: 1MHz

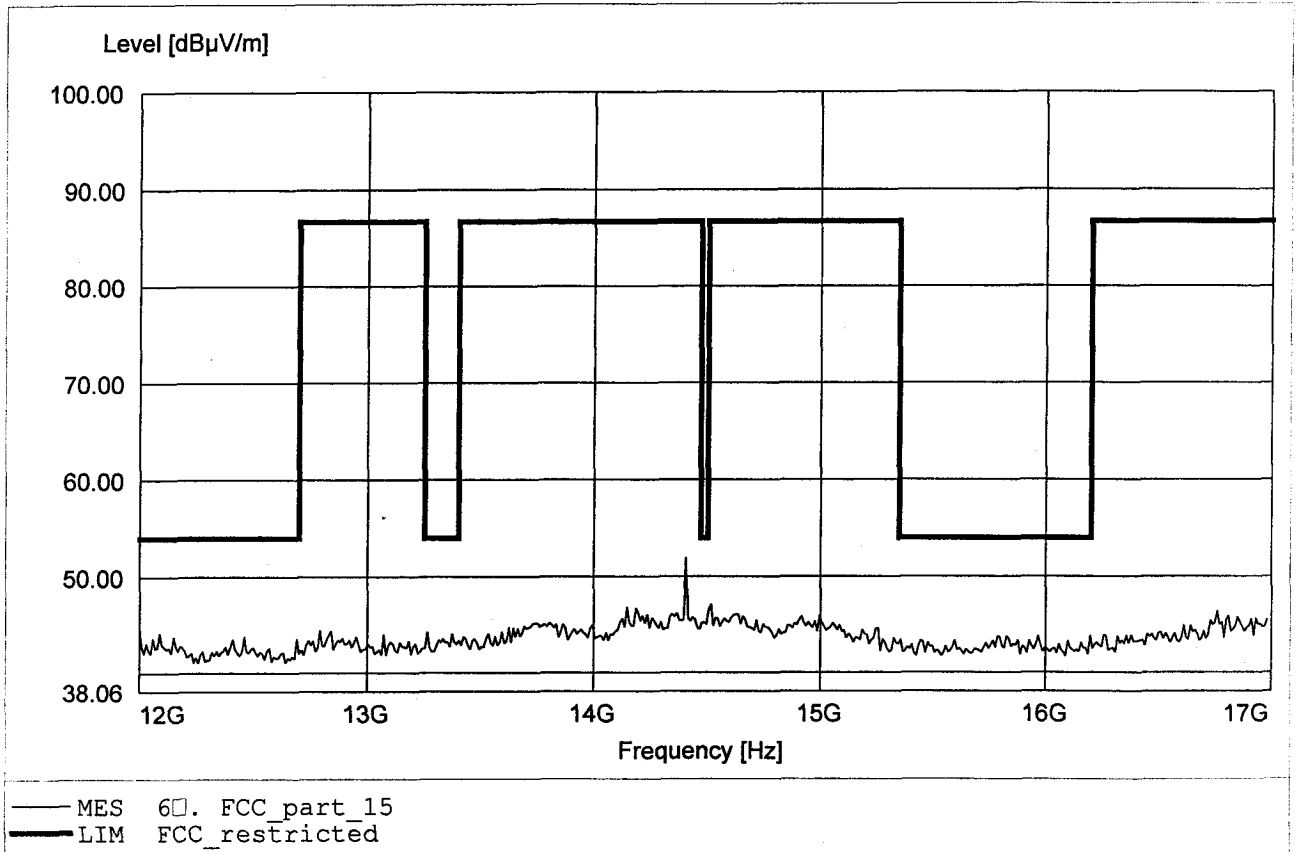


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 14.405GHz, Emax: 53.07dBµV/m, RBW: 1MHz

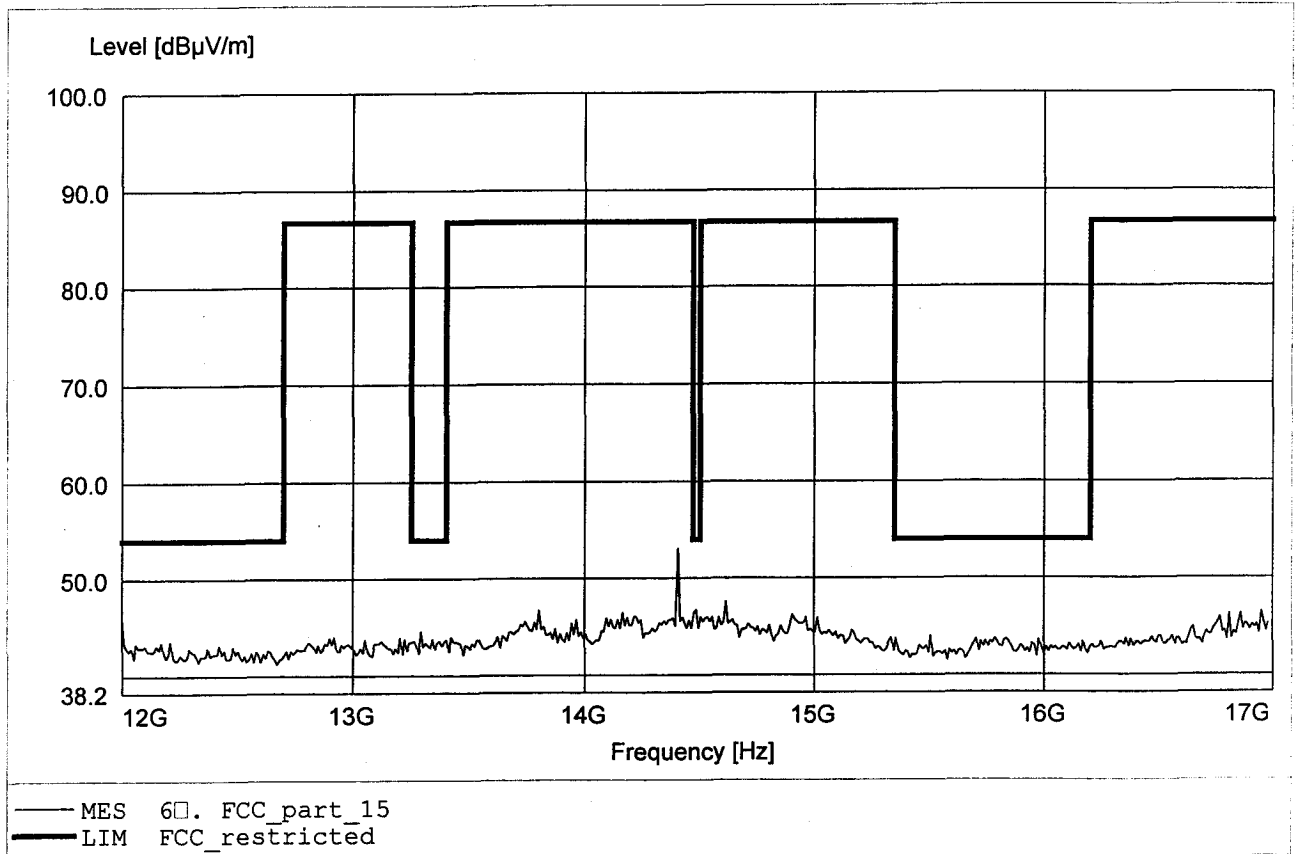


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.038GHz, Emax: 47.61dBµV/m, RBW: 1MHz

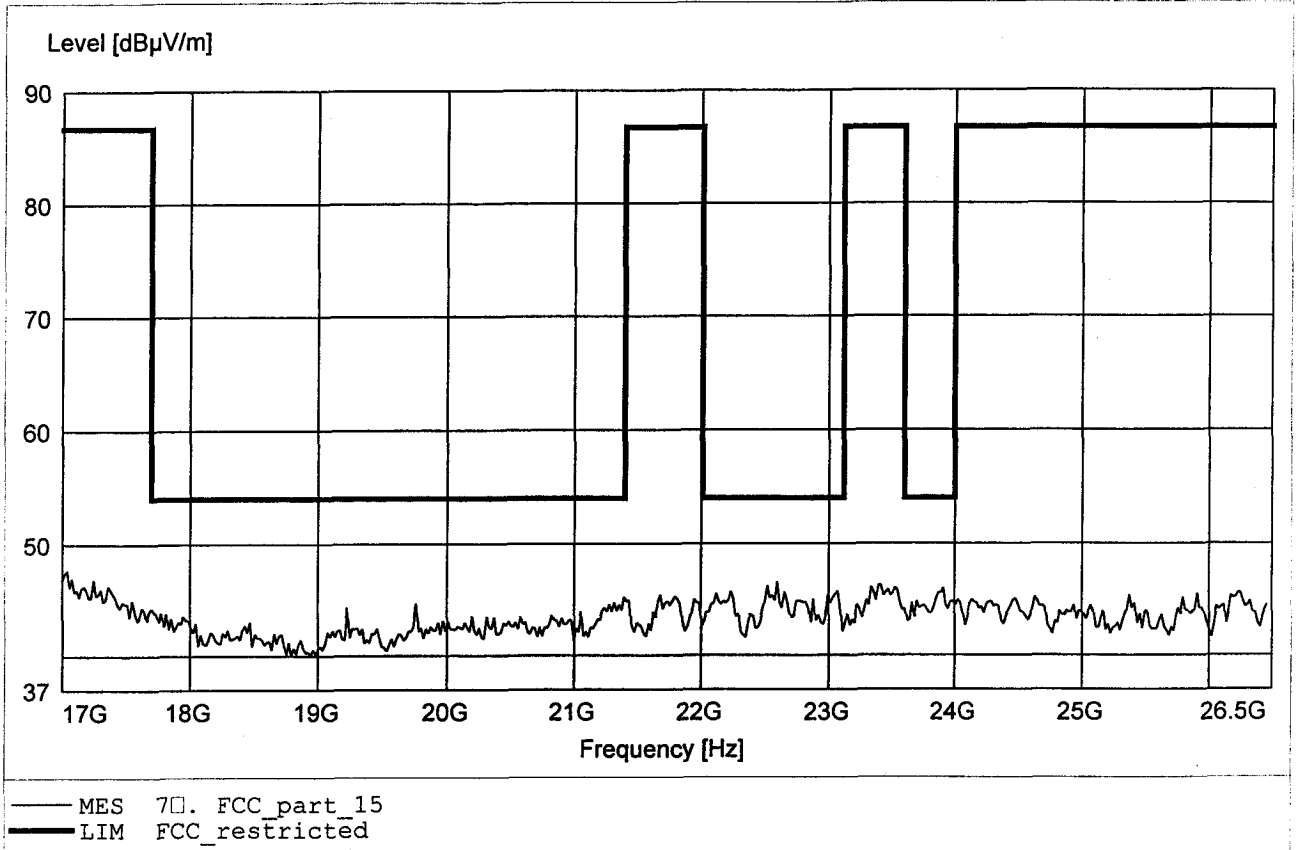


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.019GHz, Emax: 48.75dBµV/m, RBW: 1MHz

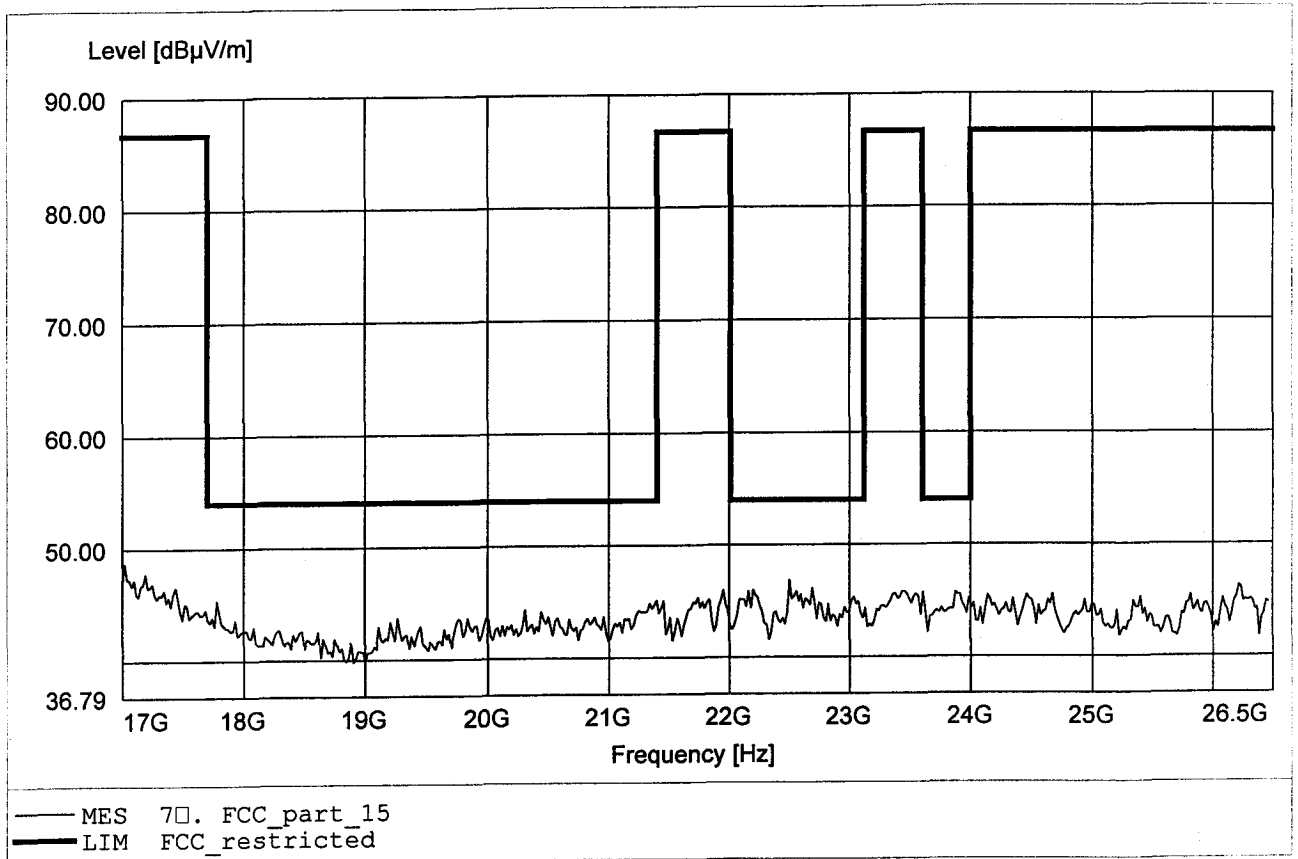


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 193.868MHz, Emax: 30.07dBµV/m, RBW: 100kHz

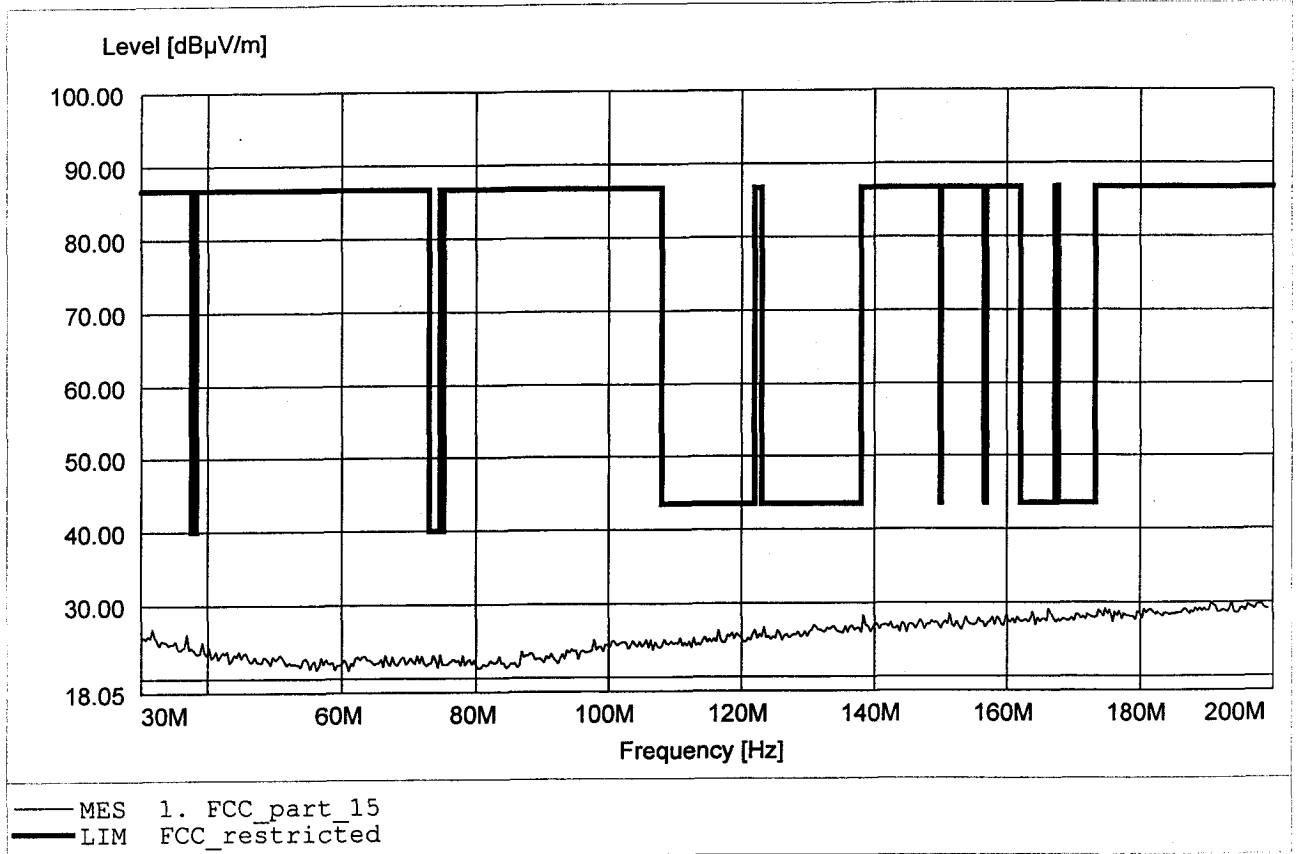


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 188.076MHz, Emax: 31.03dBµV/m, RBW: 100kHz

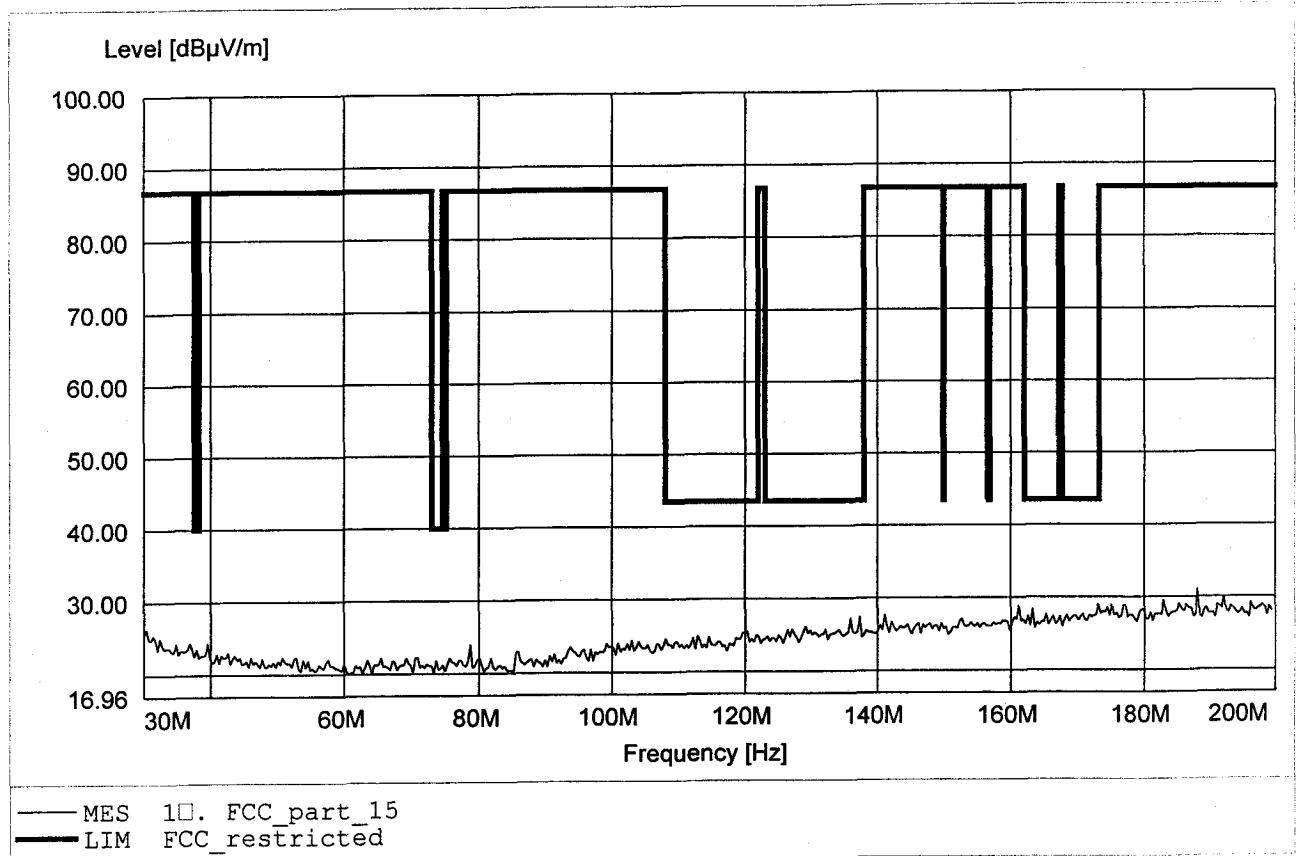


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 919.840MHz, Emax: 22.37dBµV/m, RBW: 100kHz

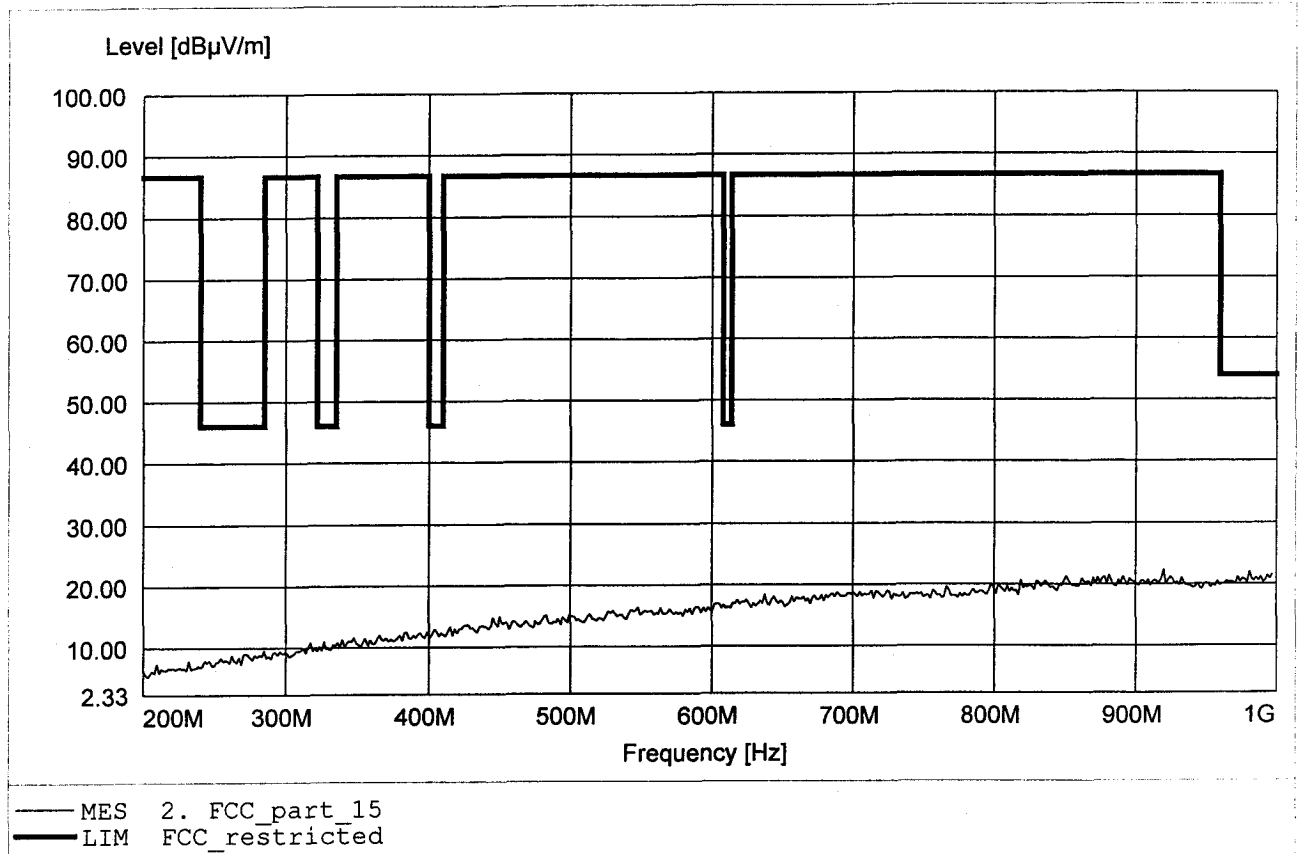


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 966.333MHz, Emax: 21.64dBµV/m, RBW: 100kHz

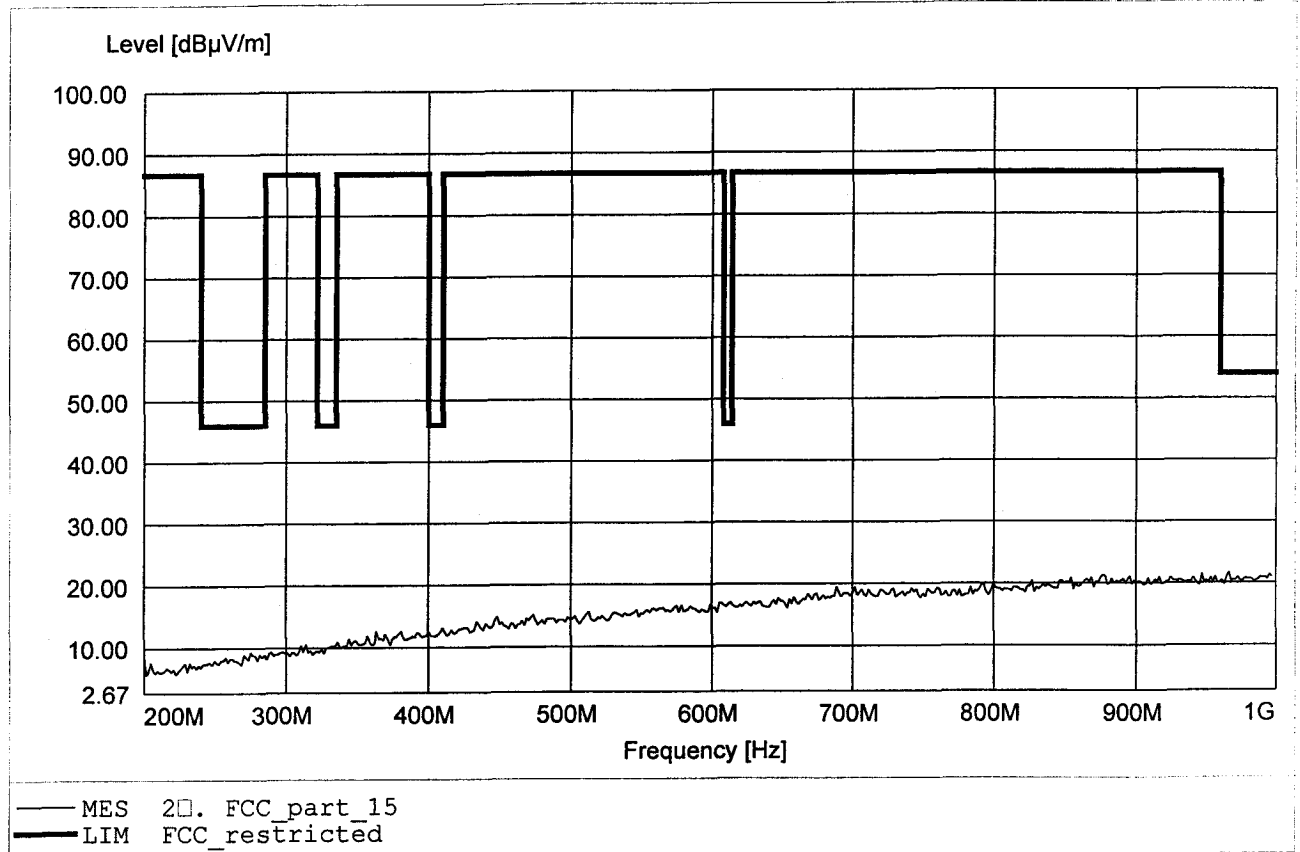


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 1.967GHz, Emax: 55.62dBμV/m, RBW: 1MHz

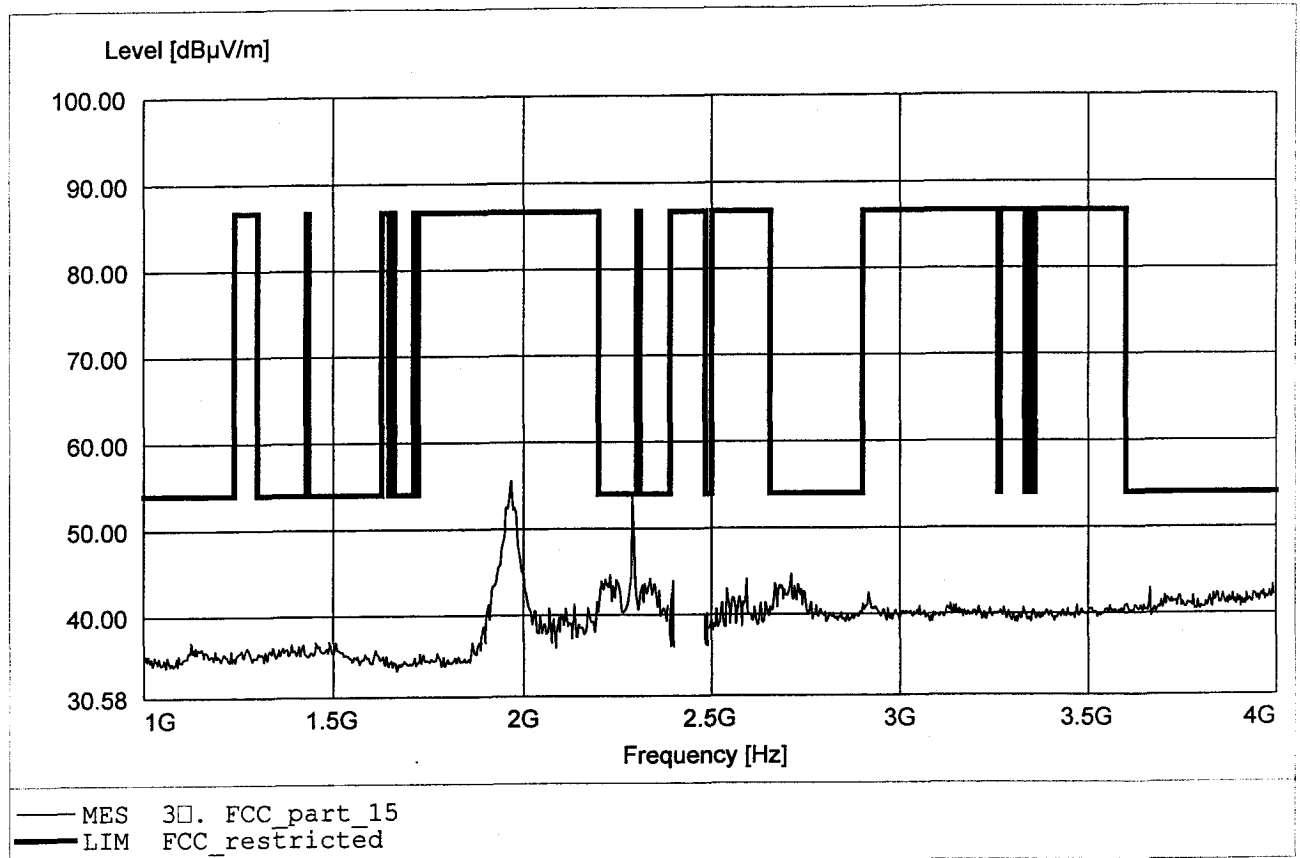


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 1.967GHz, Emax: 46.76dBµV/m, RBW: 1MHz

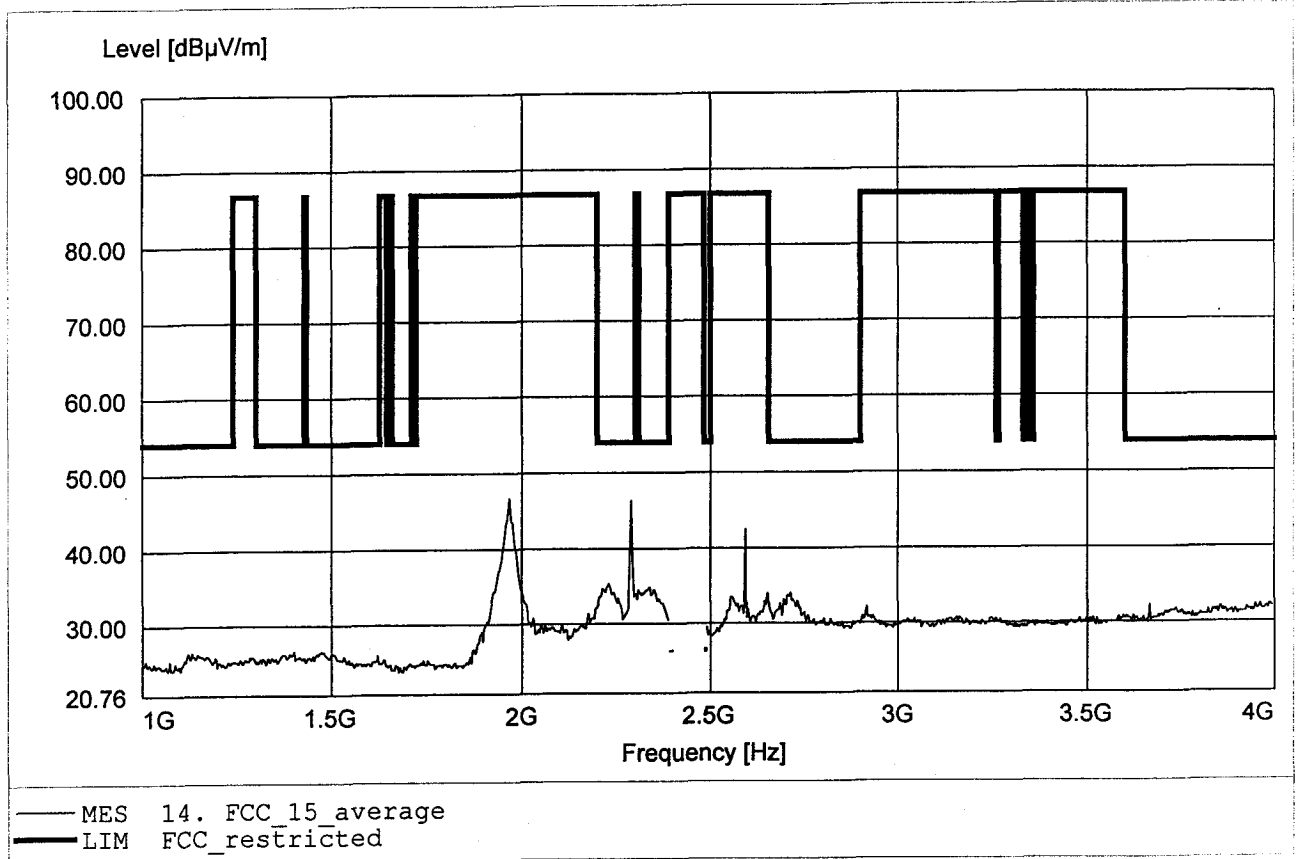


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 1.964GHz, Emax: 54.07dBµV/m, RBW: 1MHz

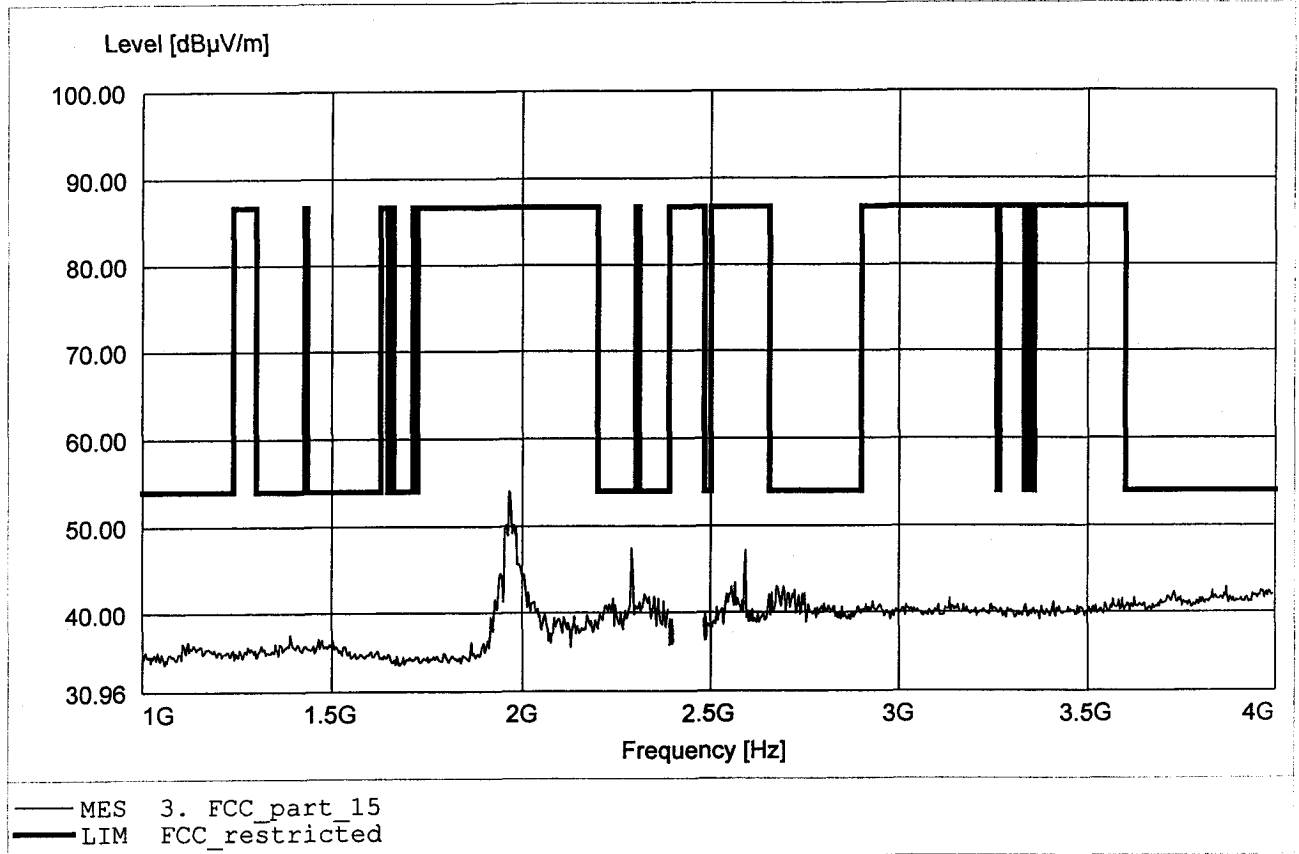


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 7.327GHz, Emax: 56.26dBµV/m, RBW: 1MHz

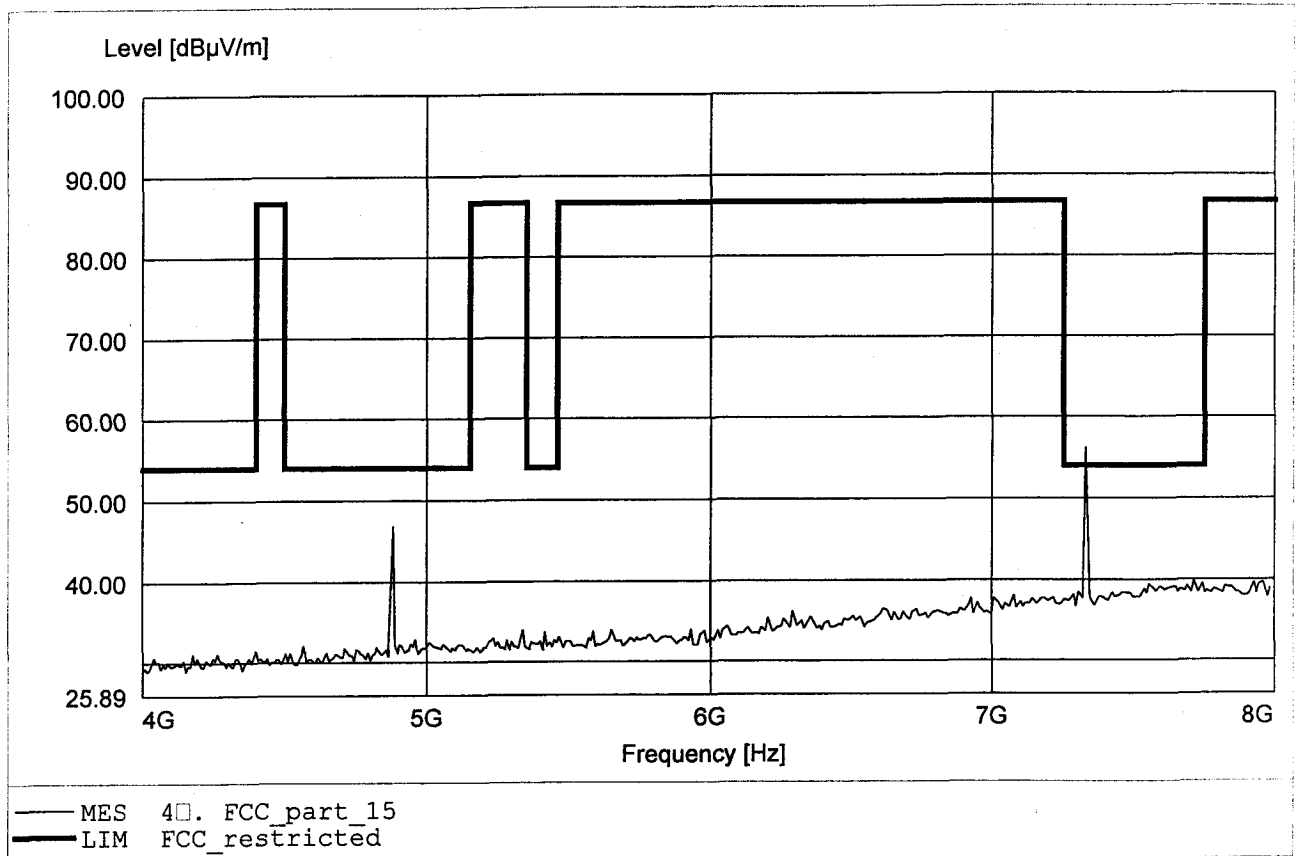


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 7.327GHz, Emax: 30.38dBµV/m, RBW: 1MHz

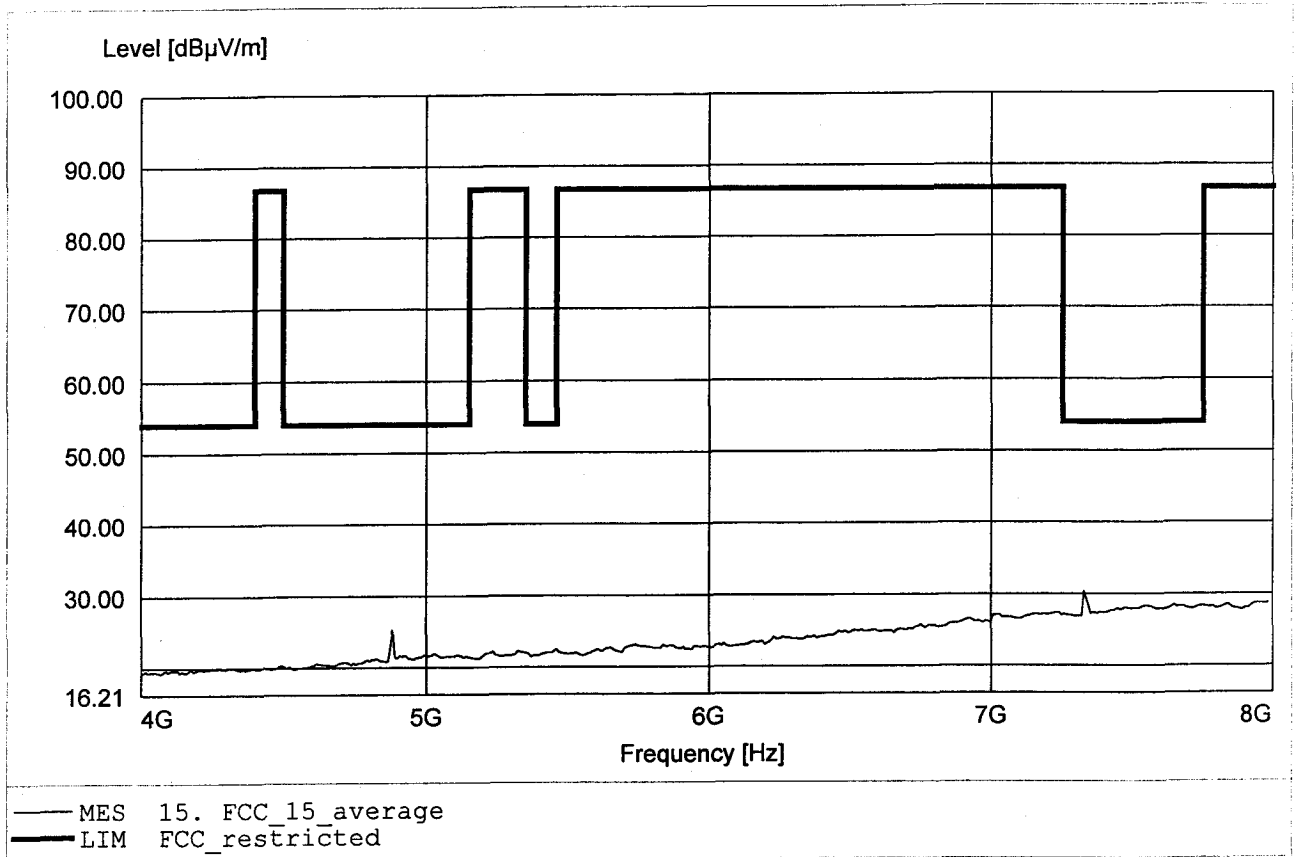


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 7.327GHz, Emax: 55.27dBµV/m, RBW: 1MHz

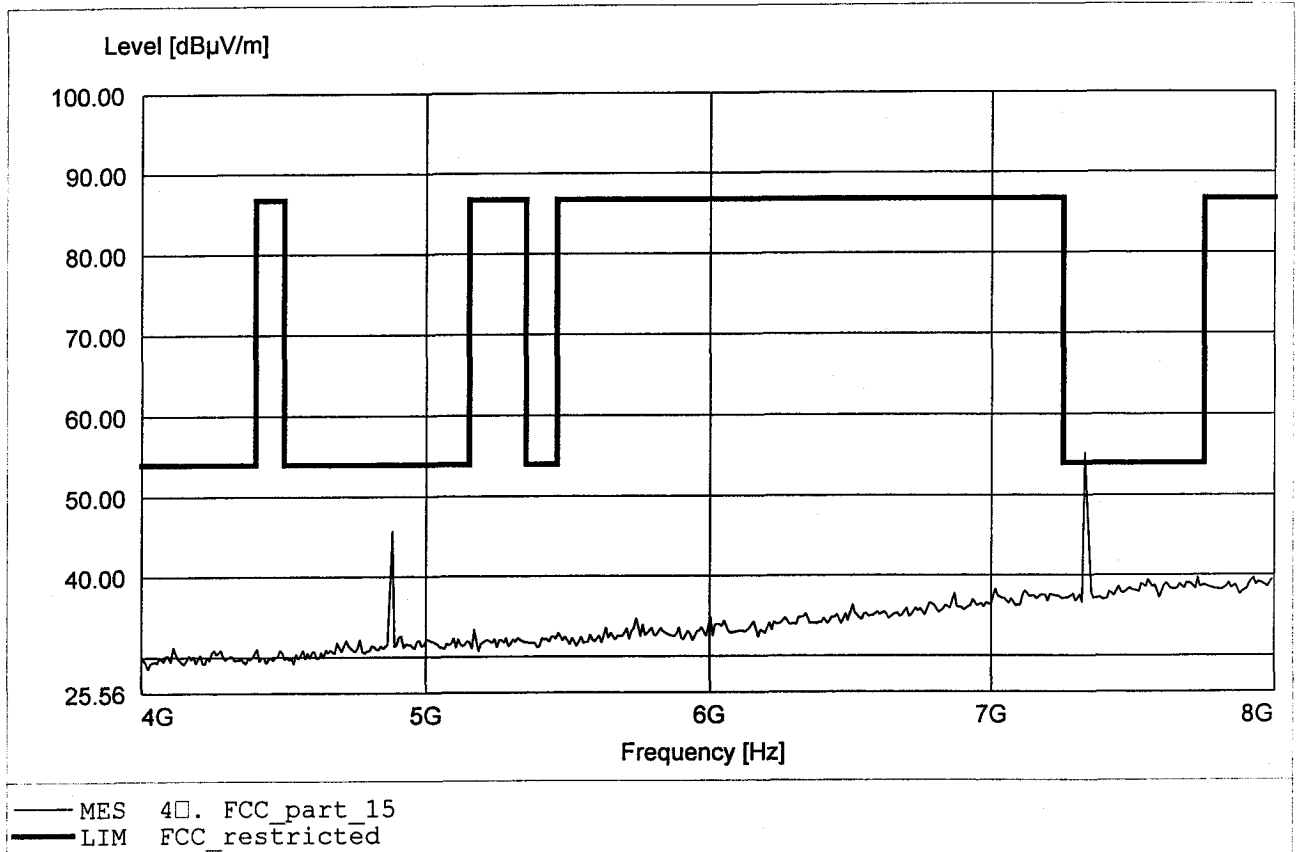


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 7.327GHz, Emax: 33.36dBµV/m, RBW: 1MHz

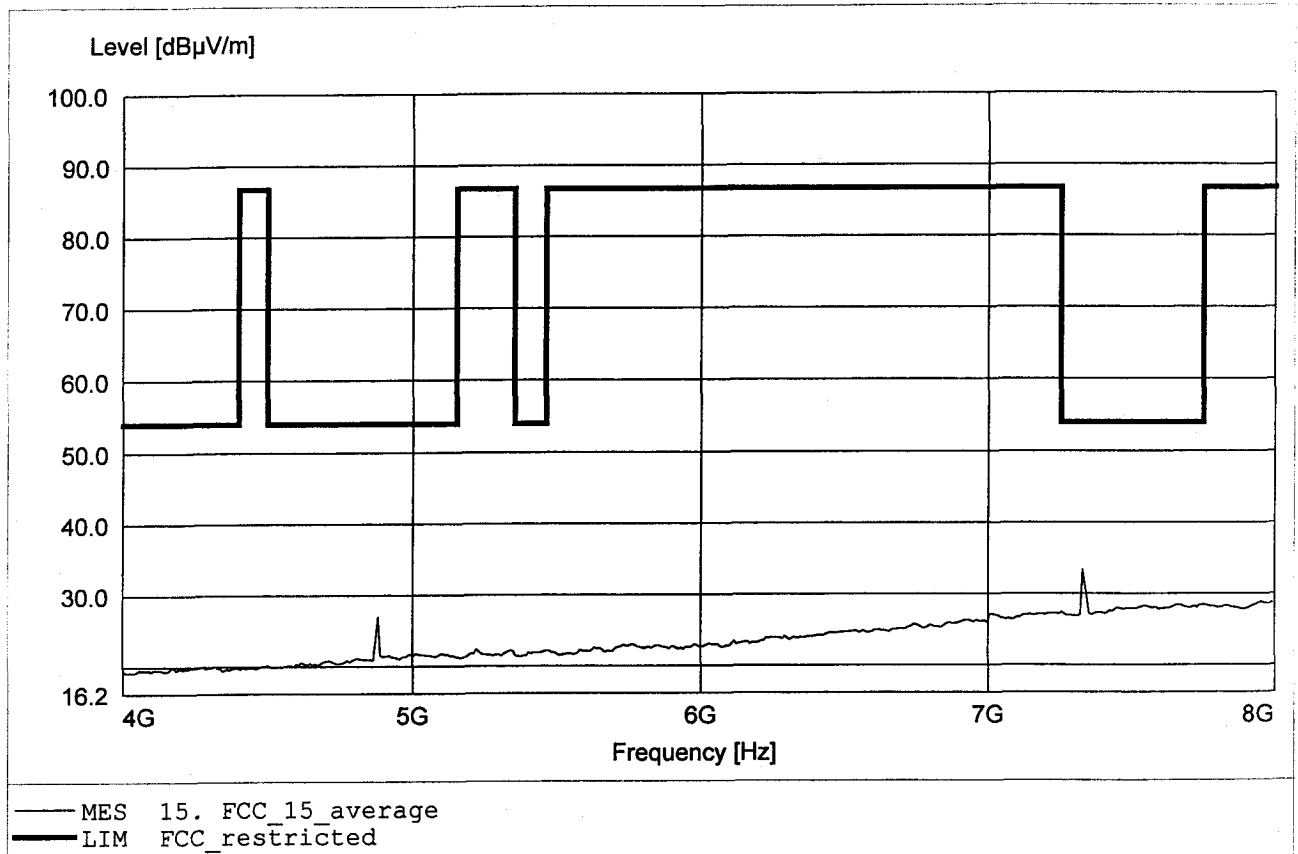


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 9.764GHz, Emax: 50.12dBuV/m, RBW: 1MHz

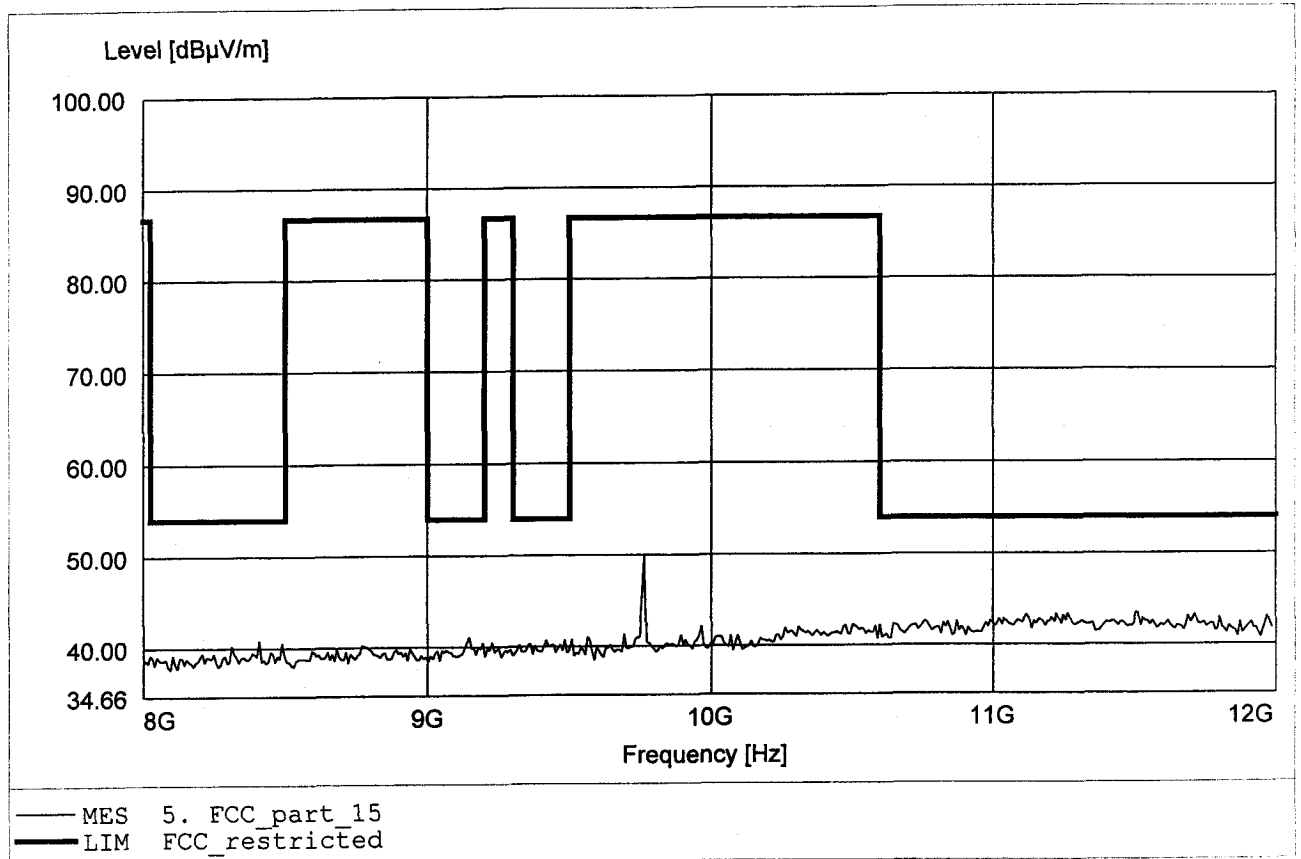


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 9.764GHz, Emax: 52.06dBμV/m, RBW: 1MHz

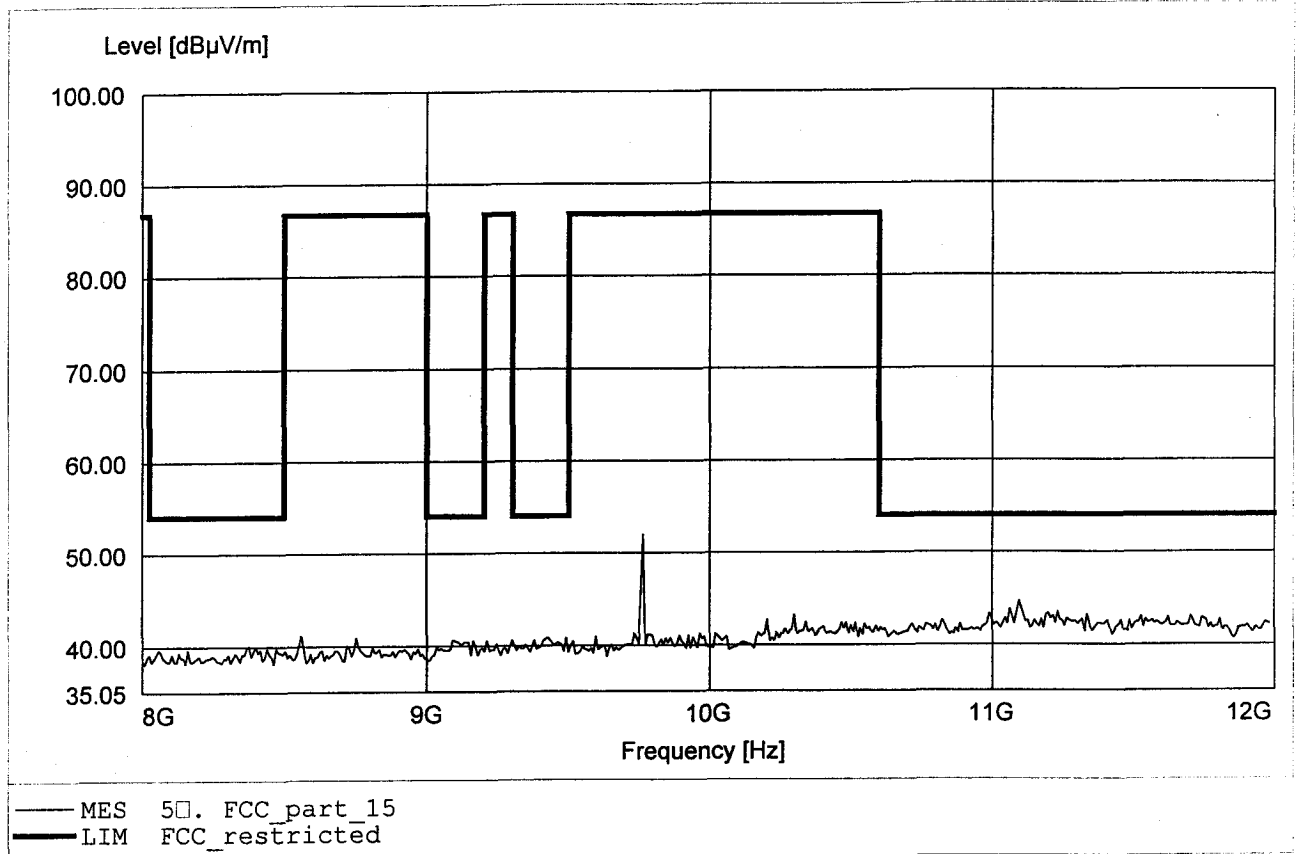


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 12.200GHz, Emax: 48.18dBµV/m, RBW: 1MHz

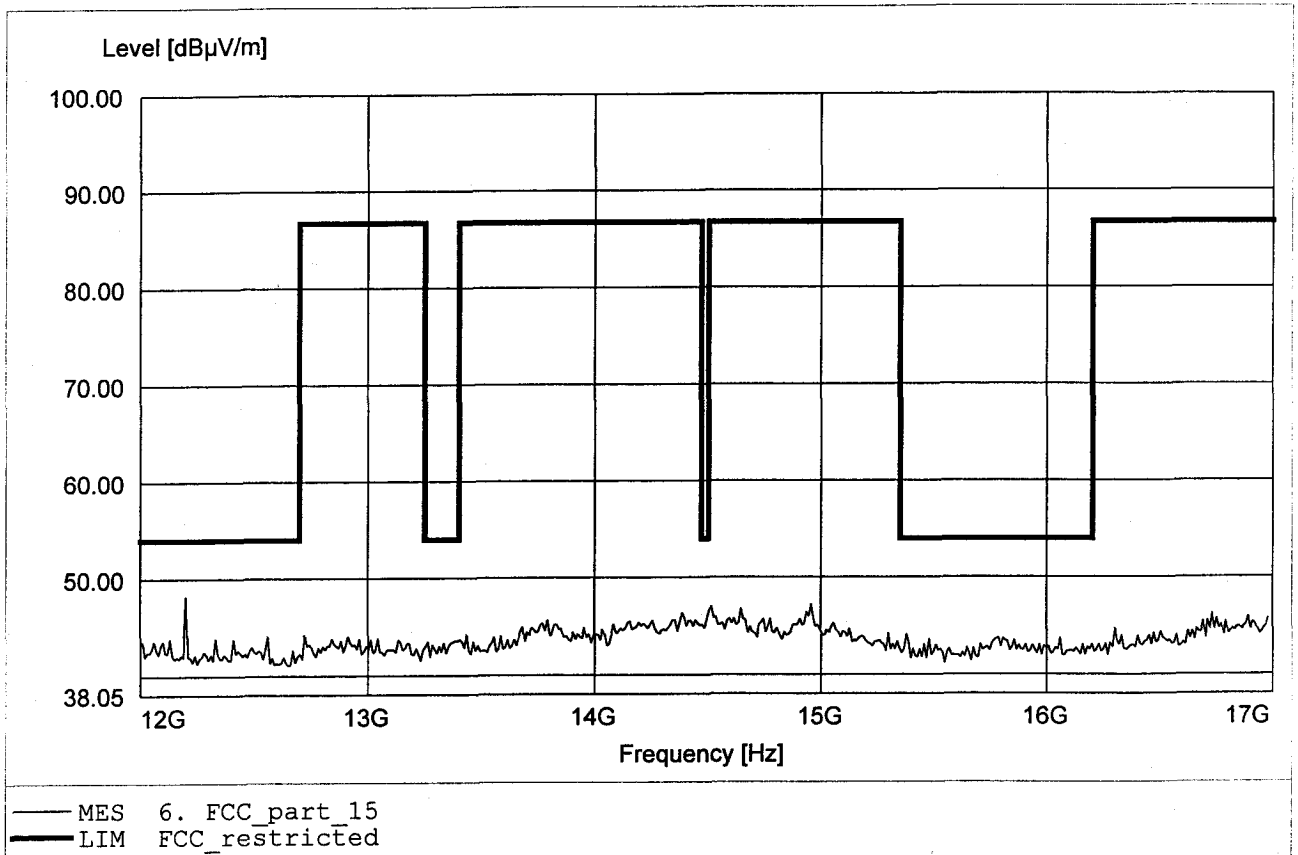


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 14.645GHz, Emax: 50.75dBµV/m, RBW: 1MHz

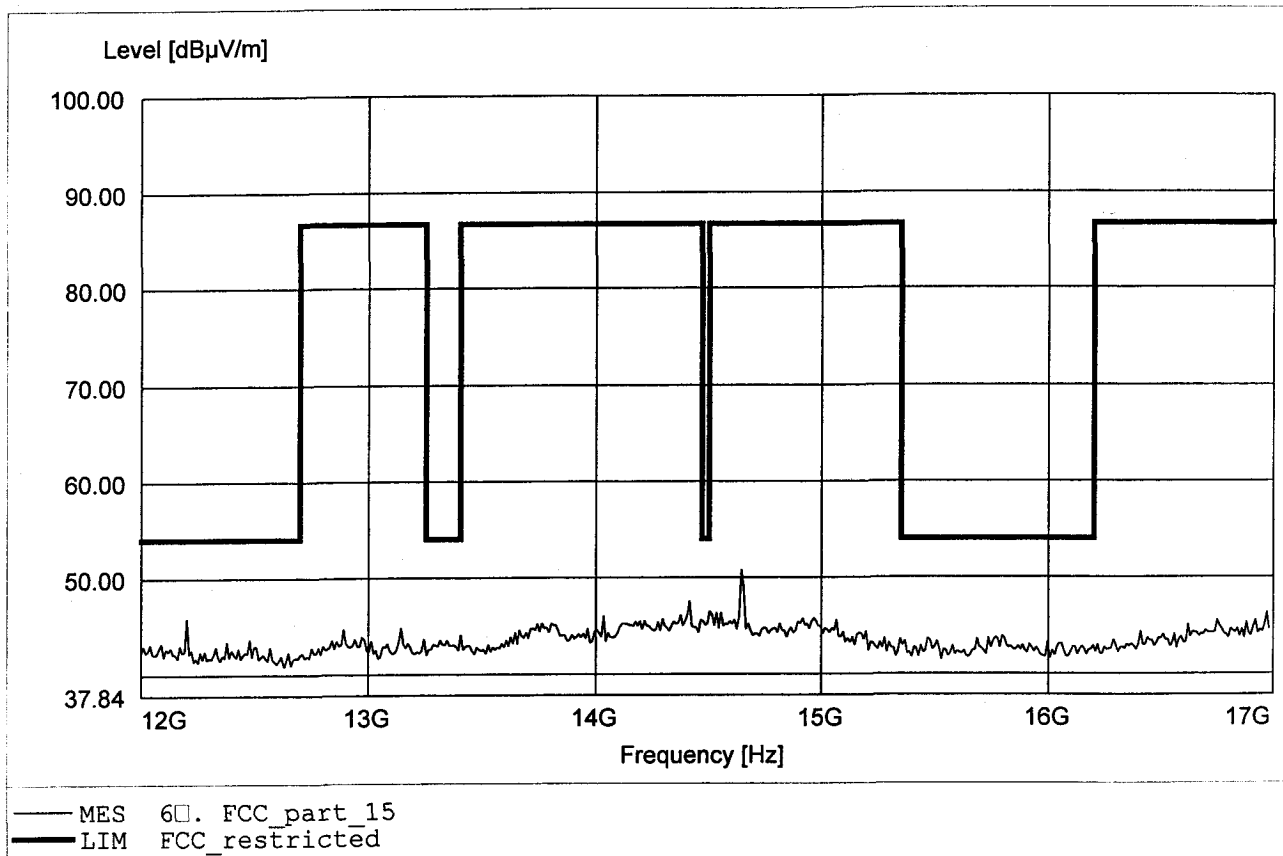


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.057GHz, Emax: 48.73dBμV/m, RBW: 1MHz

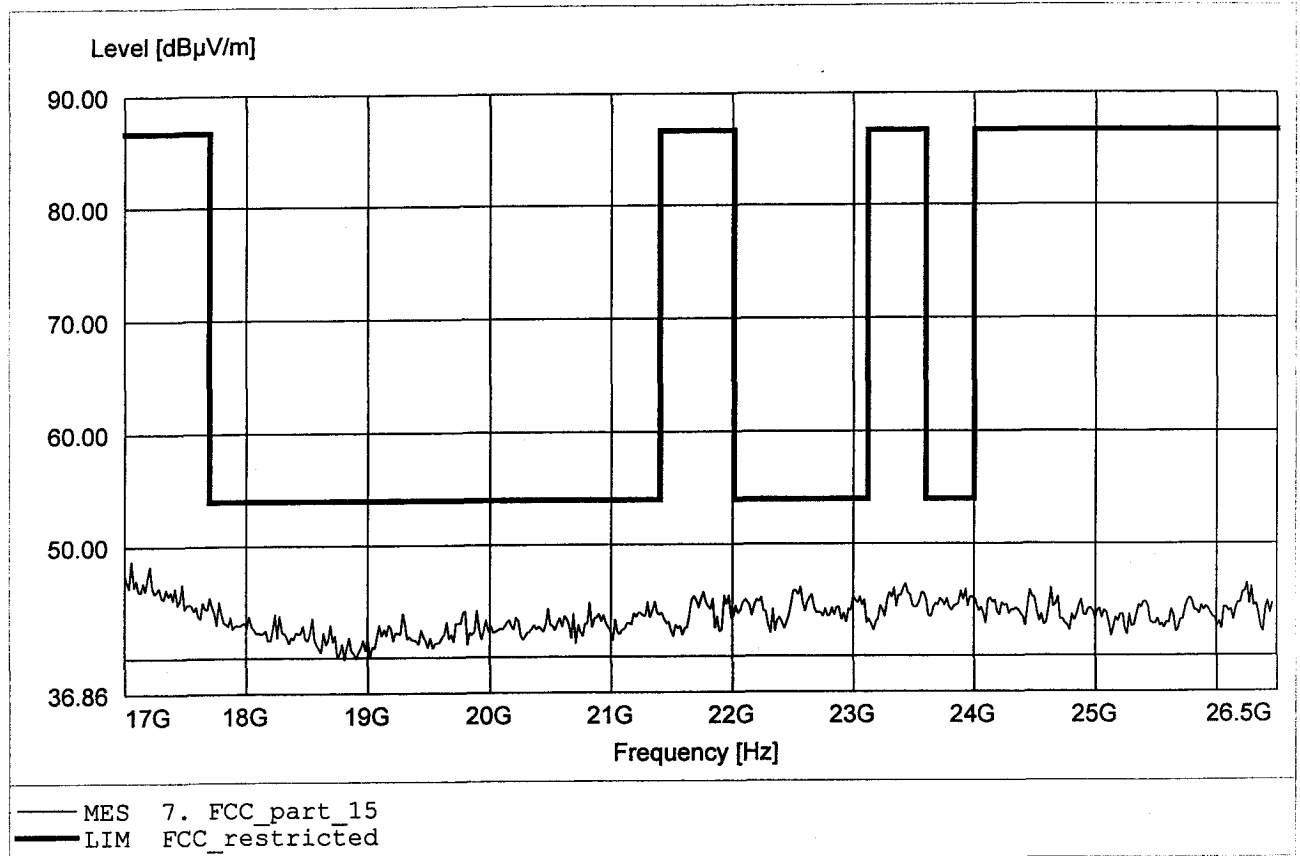


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 47.75dBuV/m, RBW: 1MHz

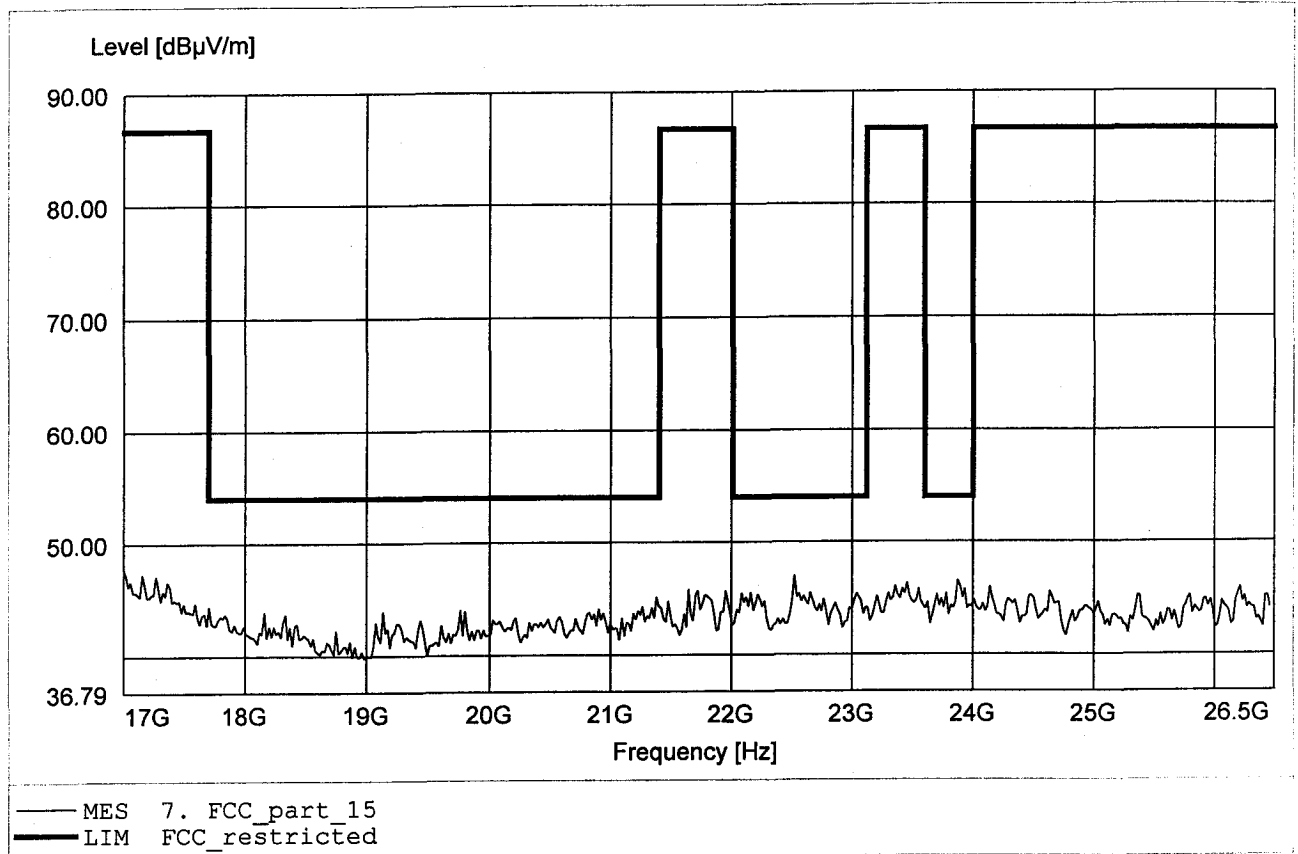


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 94
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 196.253MHz, Emax: 30.35dBµV/m, RBW: 100kHz

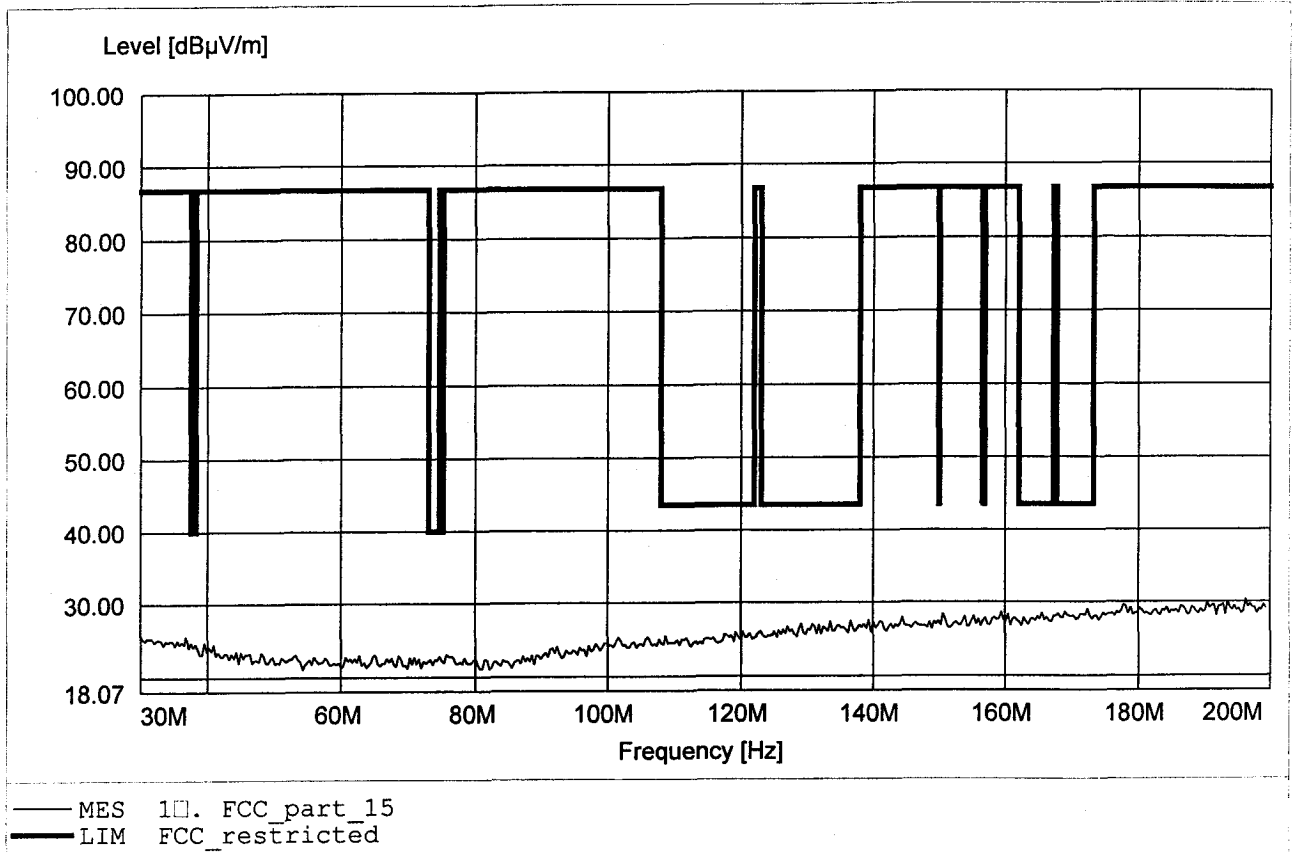


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 94
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 197.956MHz, Emax: 30.68dBµV/m, RBW: 100kHz

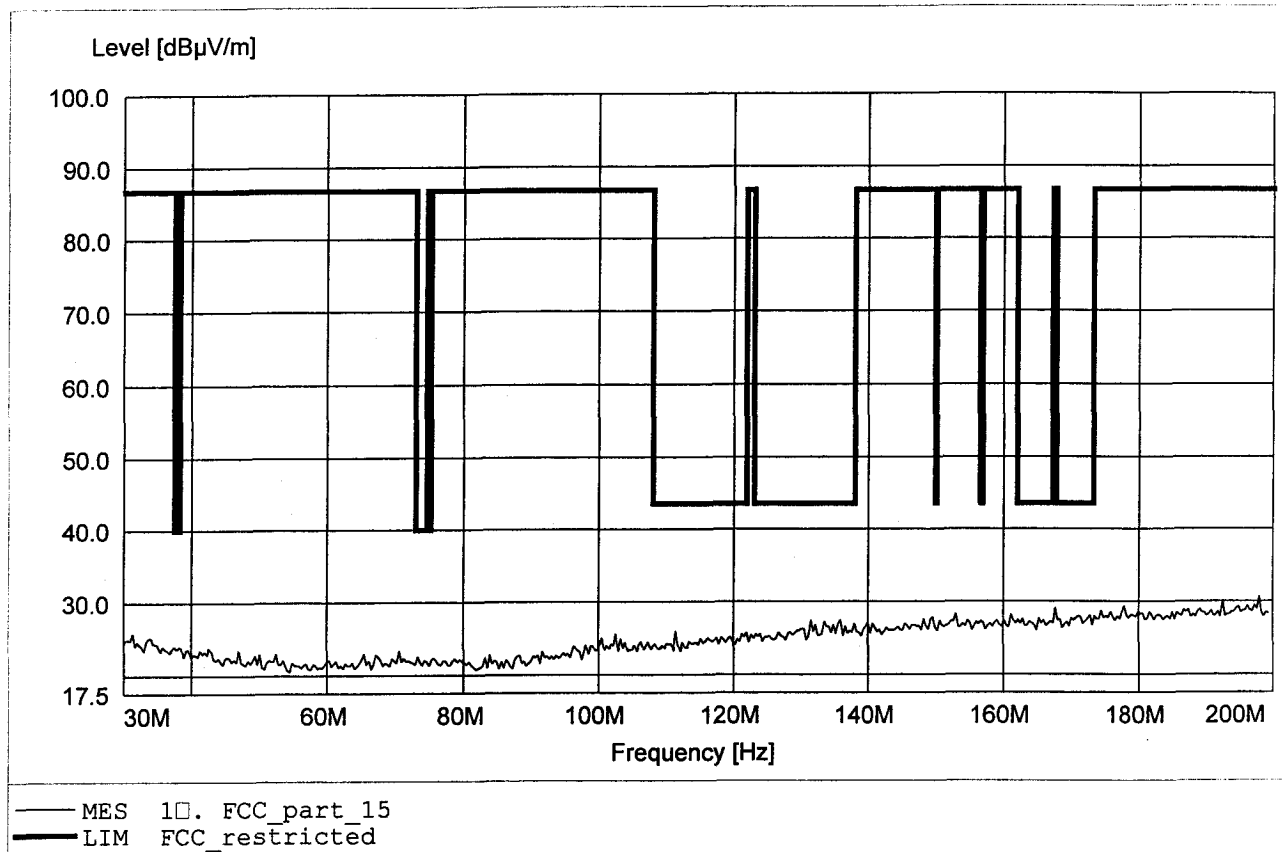


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 94
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 902.204MHz, Emax: 22.23dBµV/m, RBW: 100kHz

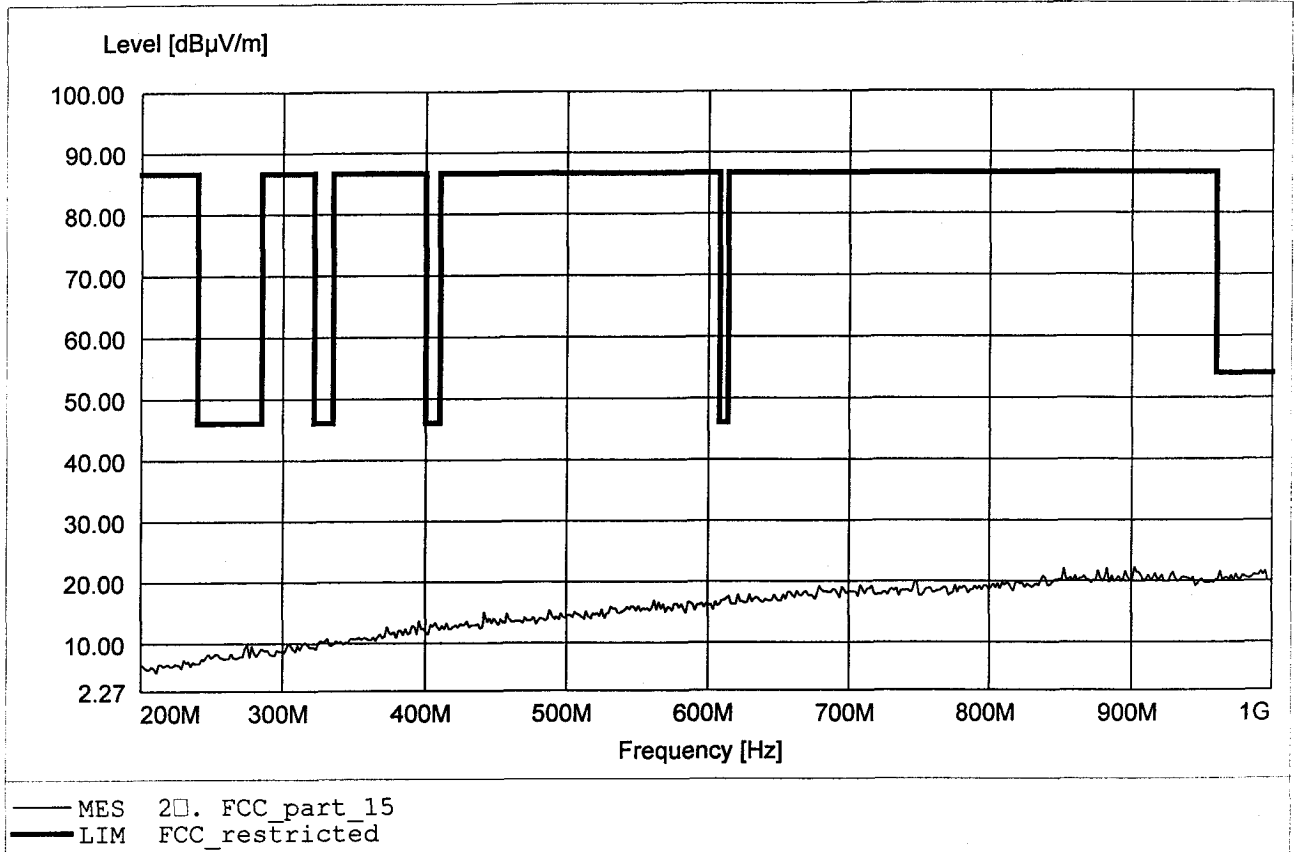


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 94
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 993.587MHz, Emax: 21.93dBµV/m, RBW: 100kHz

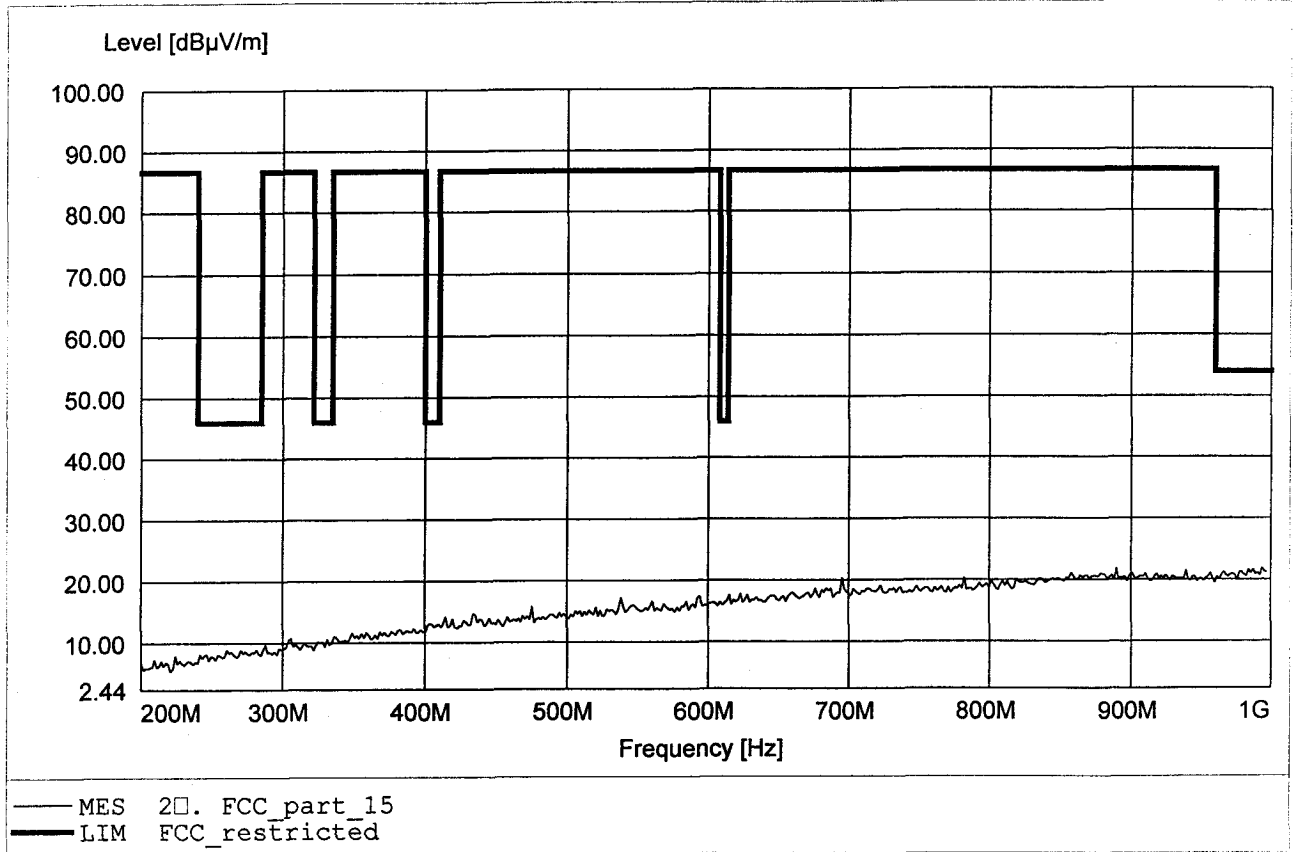


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 94
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 92.21dBµV/m, RBW: 1MHz

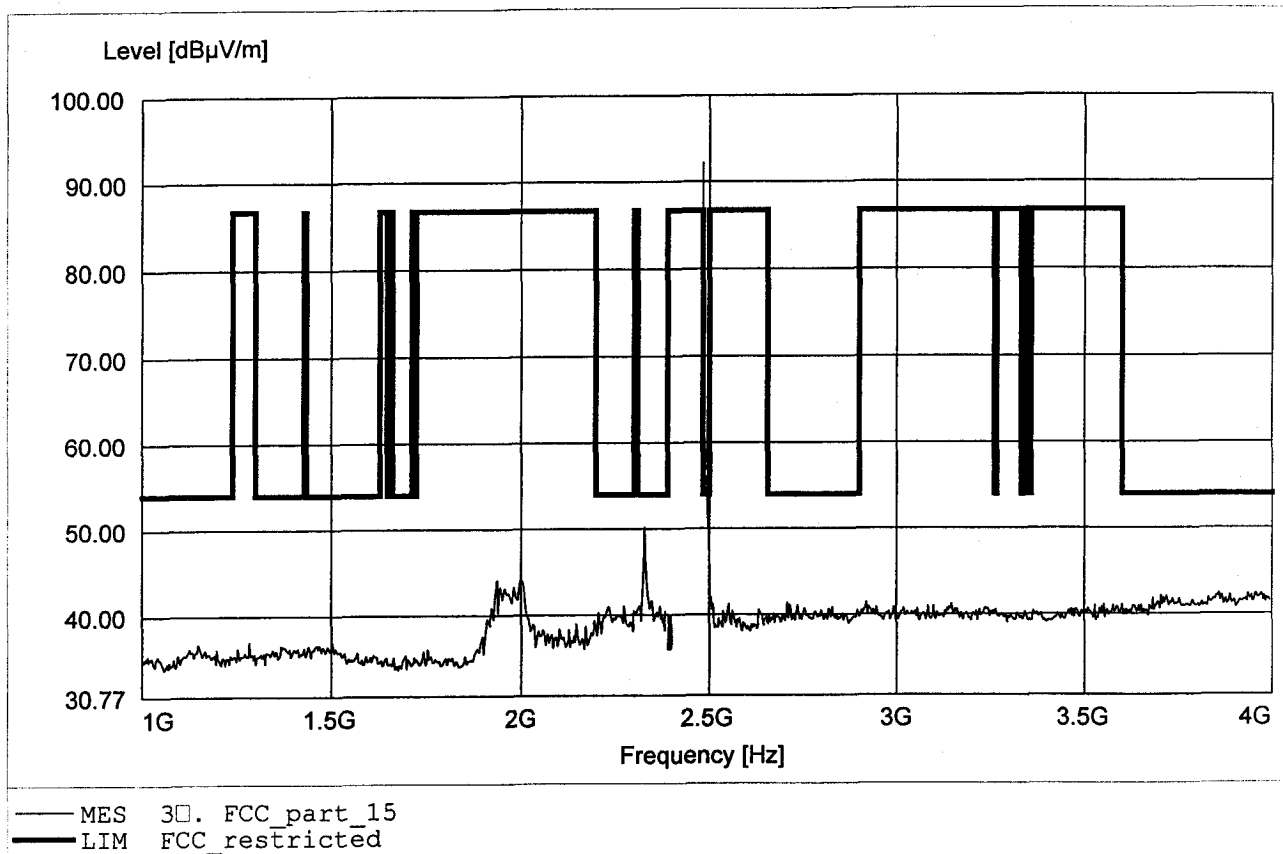


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 94
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 67.03dBµV/m, RBW: 1MHz

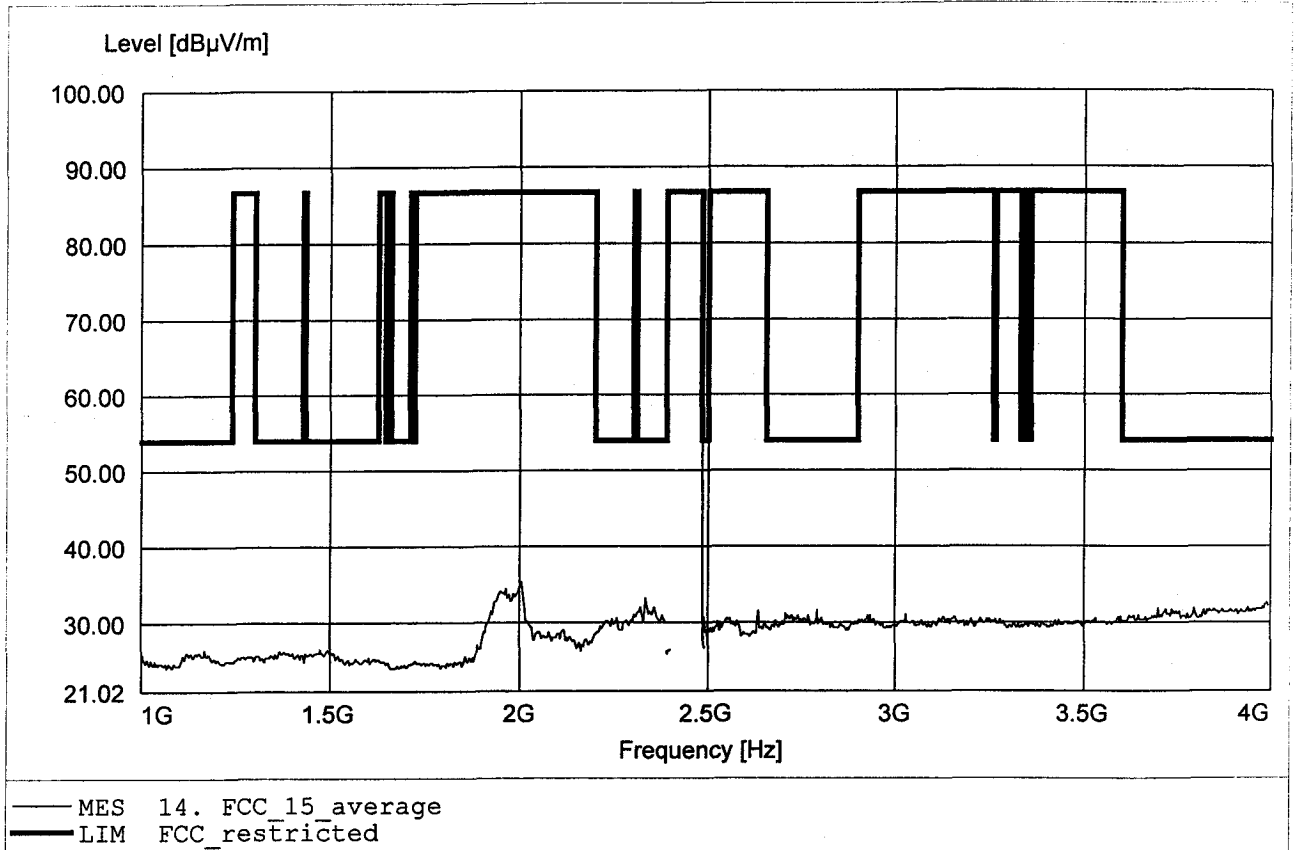

**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 94
 Model: GN9120 2G4 FCC
 Approval Holder: GnNetcom
 Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
 Test Site / Operator: ETS / Mr. Hoppe
 Test Specification: according to §15.247, average detector
 Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
 Comment 2: Freq: 2.484GHz, Emax: 67.03dBµV/m, RBW: 1MHz

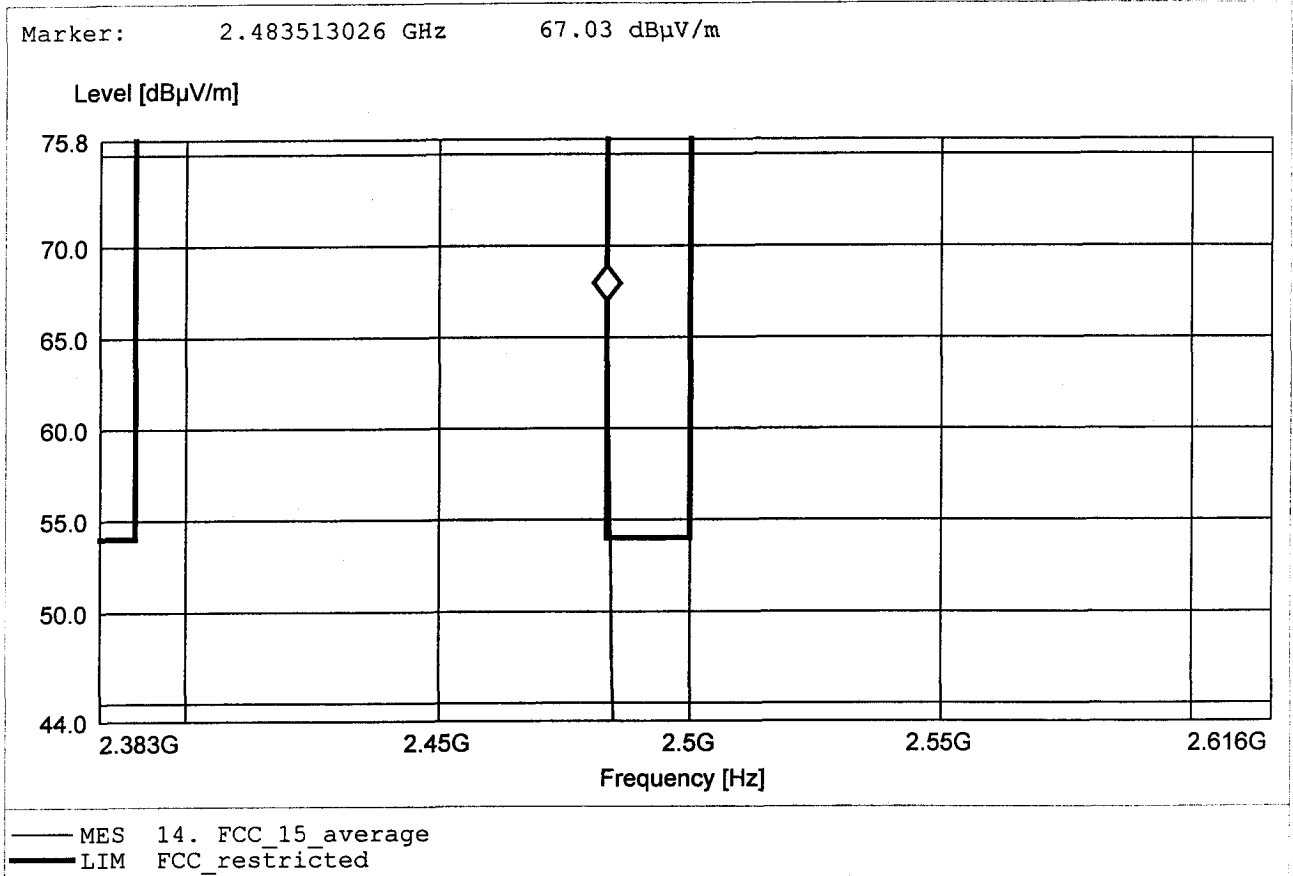

DA 00-705 / Marker-Delta Method:

The value measured with average detector may be reduced by the "delta" value according to Marker-Delta Method.

Please see next page for Marker-Delta Method plot.


Calculation:

$$67.03 \text{ dB}\mu\text{V/m} - 47.44 \text{ dB} = 19.59 \text{ dB}\mu\text{V/m}$$

=> test passed




Delta 1 [T1] RBW 30 kHz RF Att 40 dB
Ref Lvl -47.44 dB VEW 30 kHz
122 dB μ V 1.19381290 MHz SWT 9.5 ms Unit dB μ V

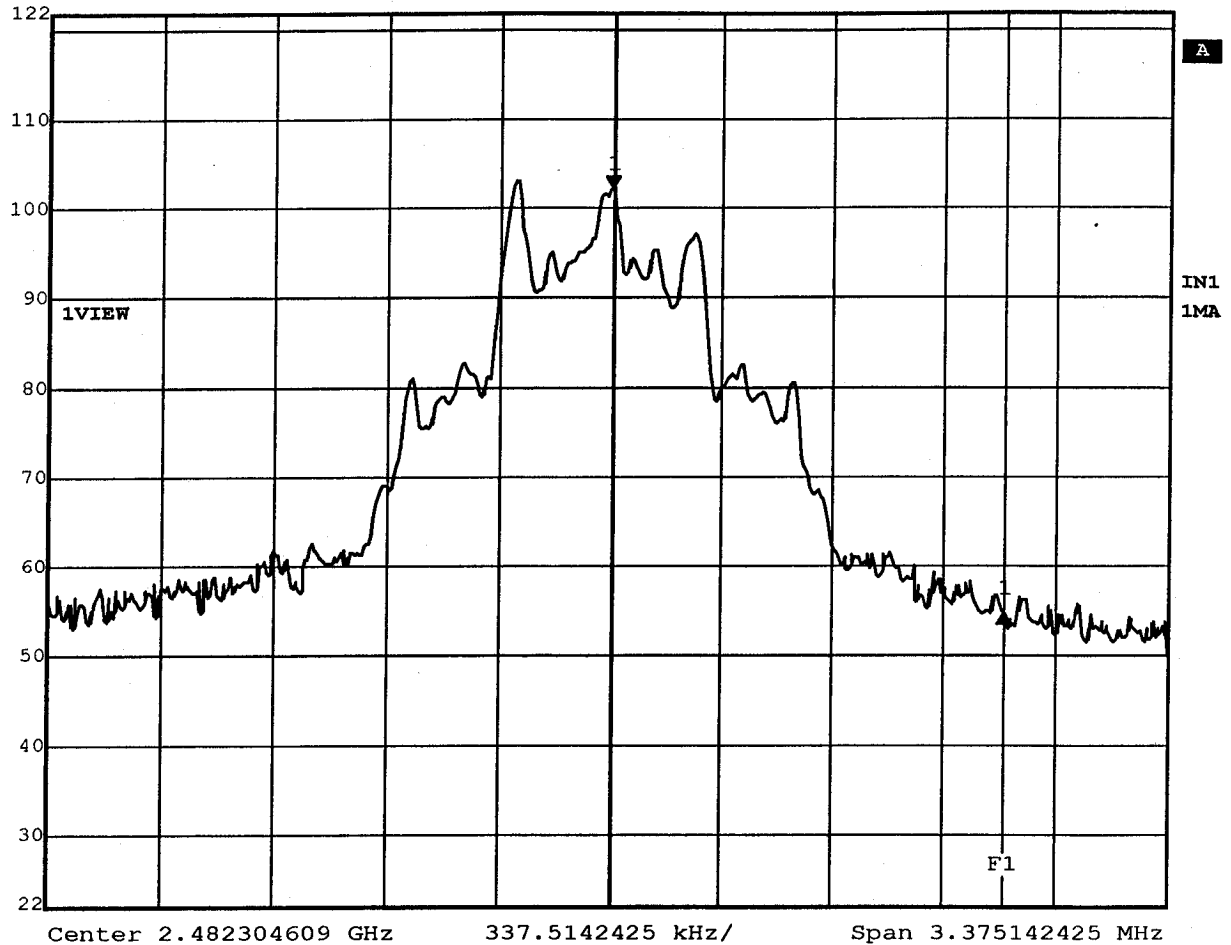

Title: Marker-Delta Method
Comment A: GpNetcom Wireless Haedset 2G4 FCC Haedset
Date: 29.NOV.2002 09:00:37


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 94
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 91.33dBµV/m, RBW: 1MHz

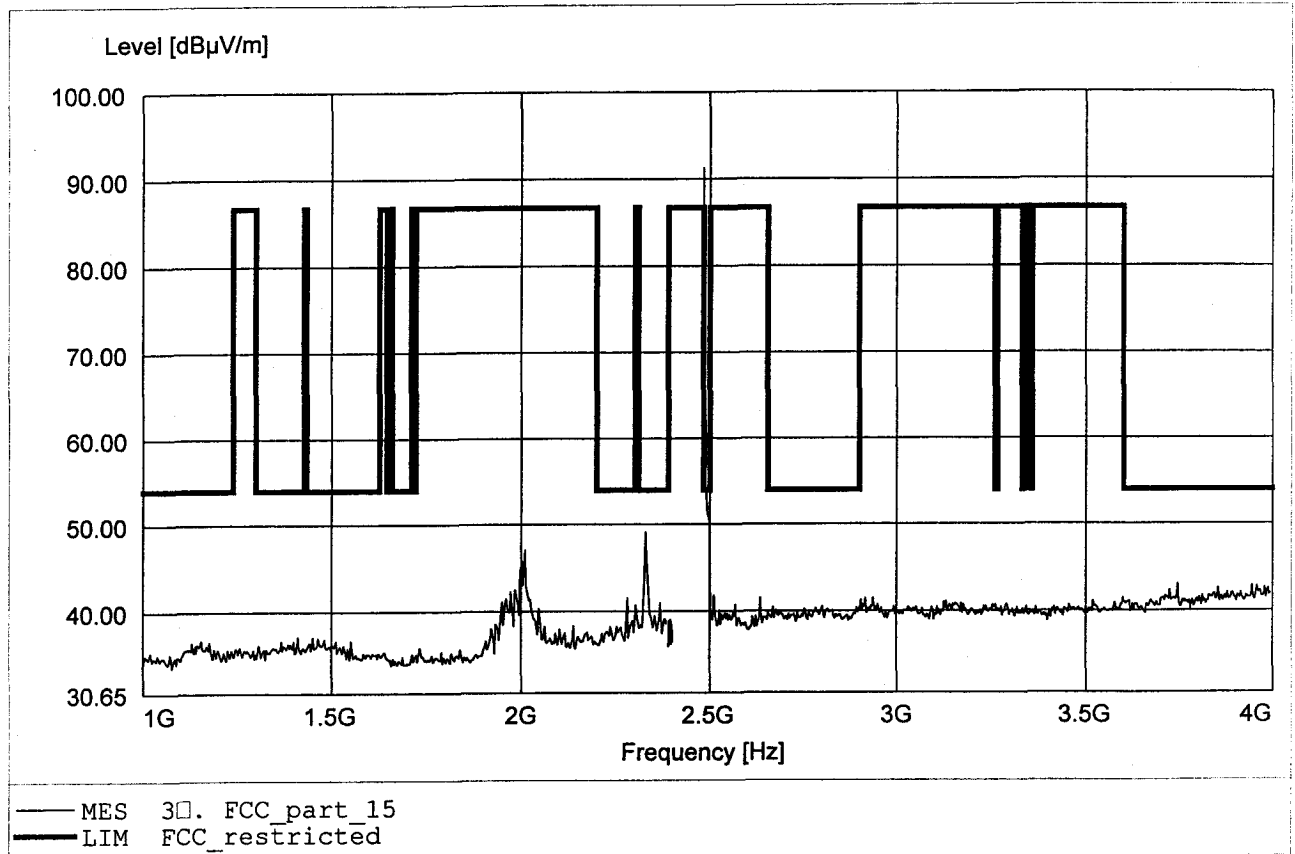


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 94
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 66.76dBμV/m, RBW: 1MHz

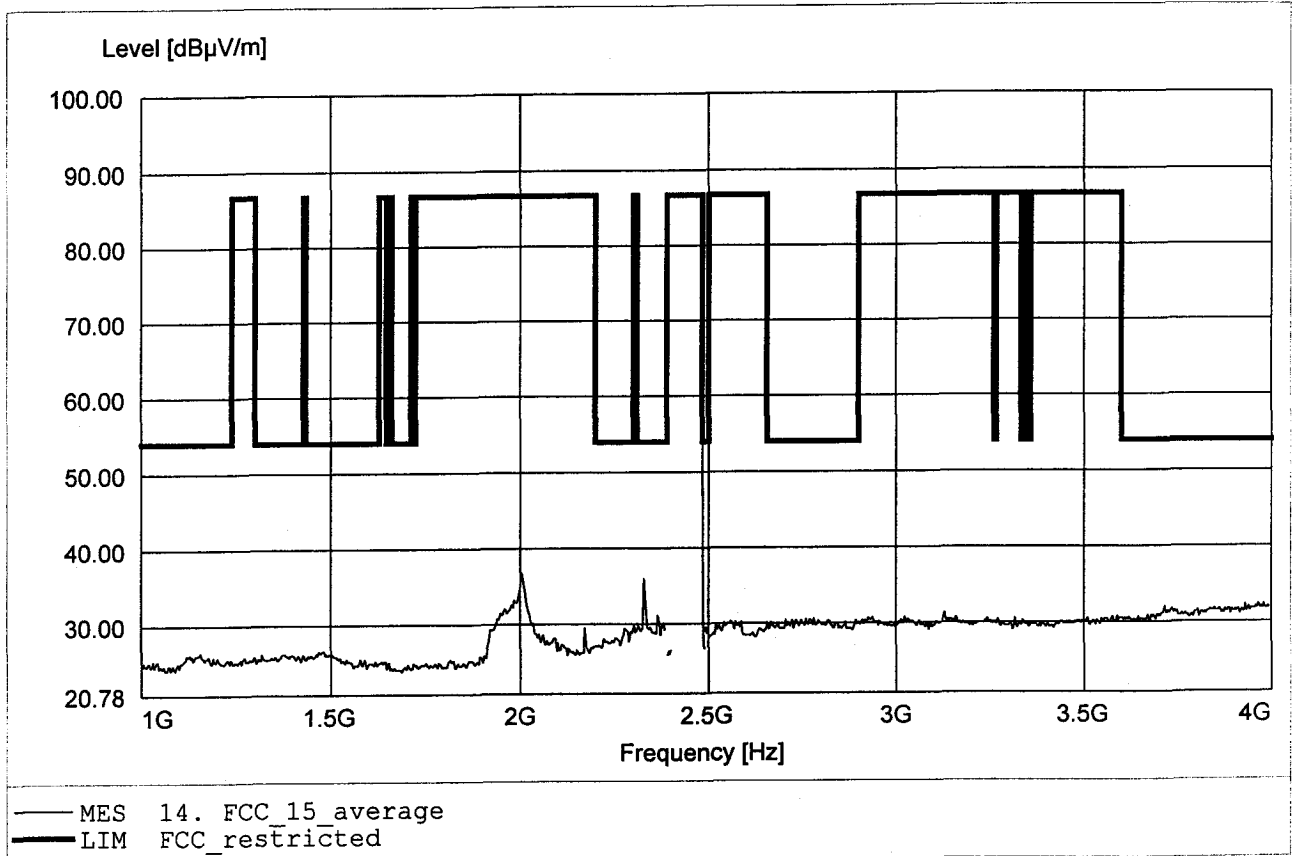

**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 94
 Model: GN9120 2G4 FCC
 Approval Holder: GnNetcom
 Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
 Test Site / Operator: ETS / Mr. Hoppe
 Test Specification: according to §15.247, average detector
 Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
 Comment 2: Freq: 2.484GHz, Emax: 66.76dBµV/m, RBW: 1MHz

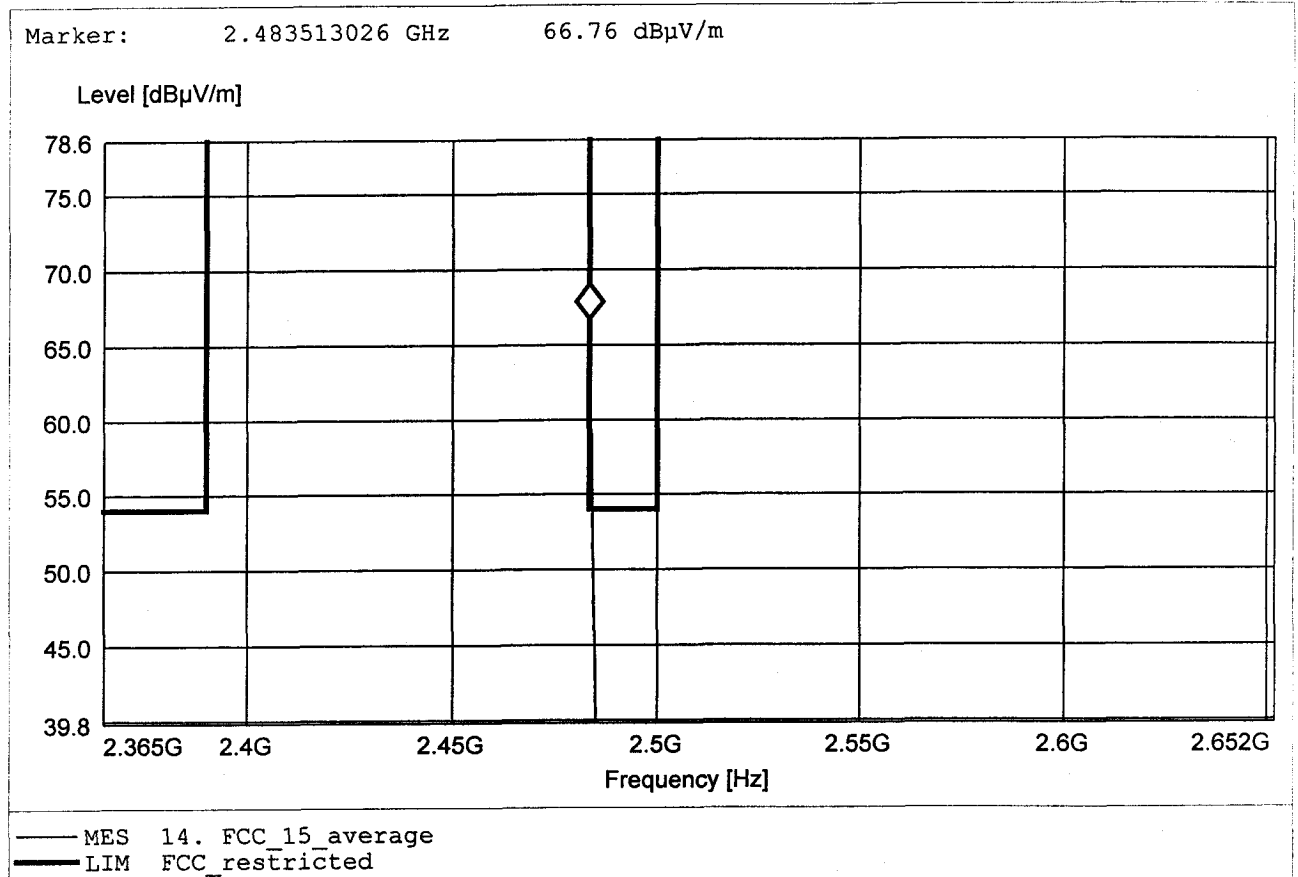

DA 00-705 / Marker-Delta Method:

The value measured with average detector may be reduced by the "delta" value according to Marker-Delta Method.

Please see next page for Marker-Delta Method plot.


Calculation:

$$66.76 \text{ dB}\mu\text{V/m} - 47.44 \text{ dB} = 19.32 \text{ dB}\mu\text{V/m}$$

=> test passed




Delta 1 [T1] RBW 30 kHz RF Att 40 dB
Ref Lvl -47.44 dB VBW 30 kHz
122 dB μ V 1.19381290 MHz SWT 9.5 ms Unit dB μ V

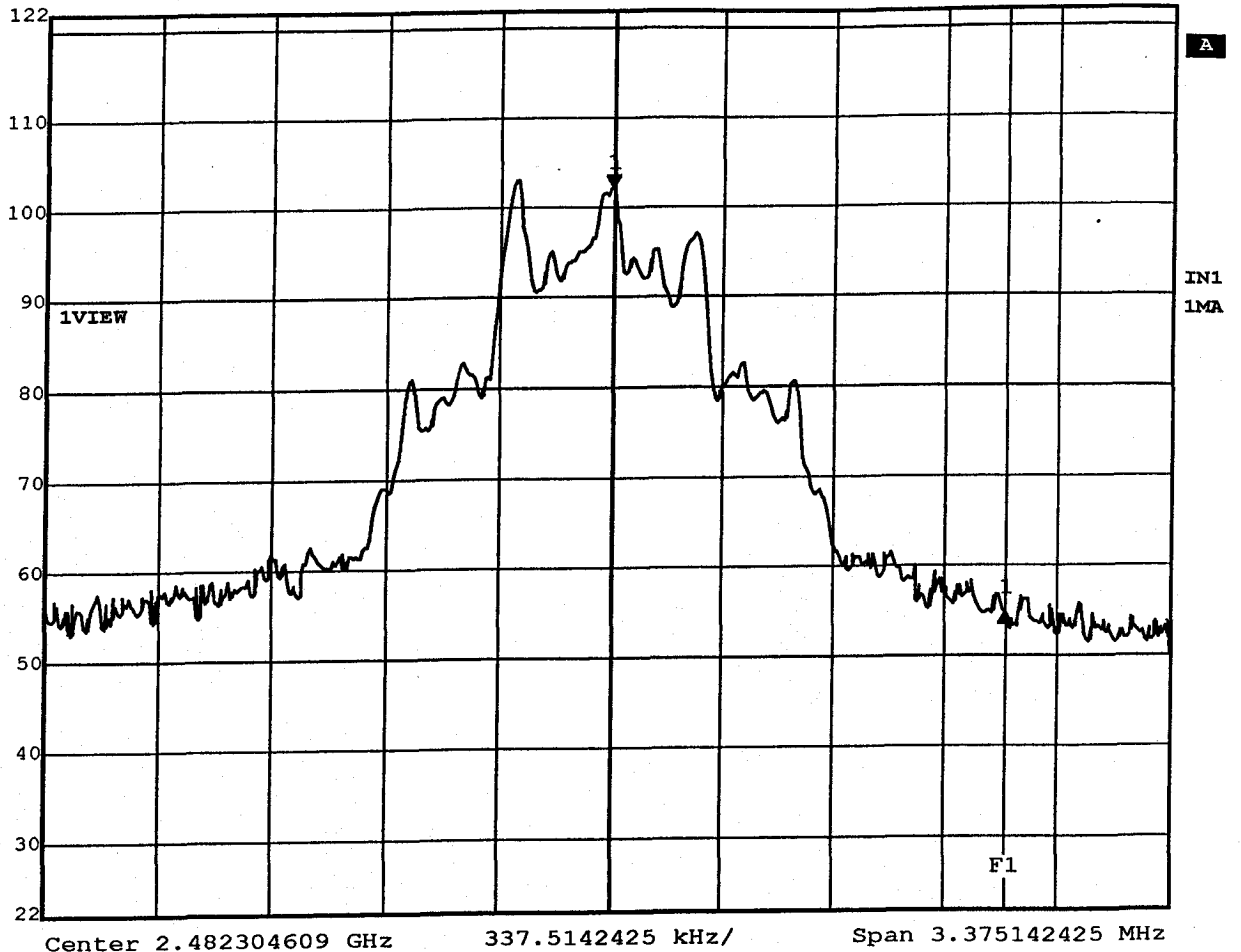

Title: Marker-Delta Method
Comment A: GnNetcom Wireless Haedset 2G4 FCC Haedset
Date: 29.NOV.2002 09:00:37


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 94
 Model: GN9120 2G4 FCC
 Approval Holder: GnNetcom
 Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
 Test Site / Operator: ETS / Mr. Hoppe
 Test Specification: according to §15.247, peak detector
 Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
 Comment 2: Freq: 7.447GHz, Emax: 55.90dBµV/m, RBW: 1MHz

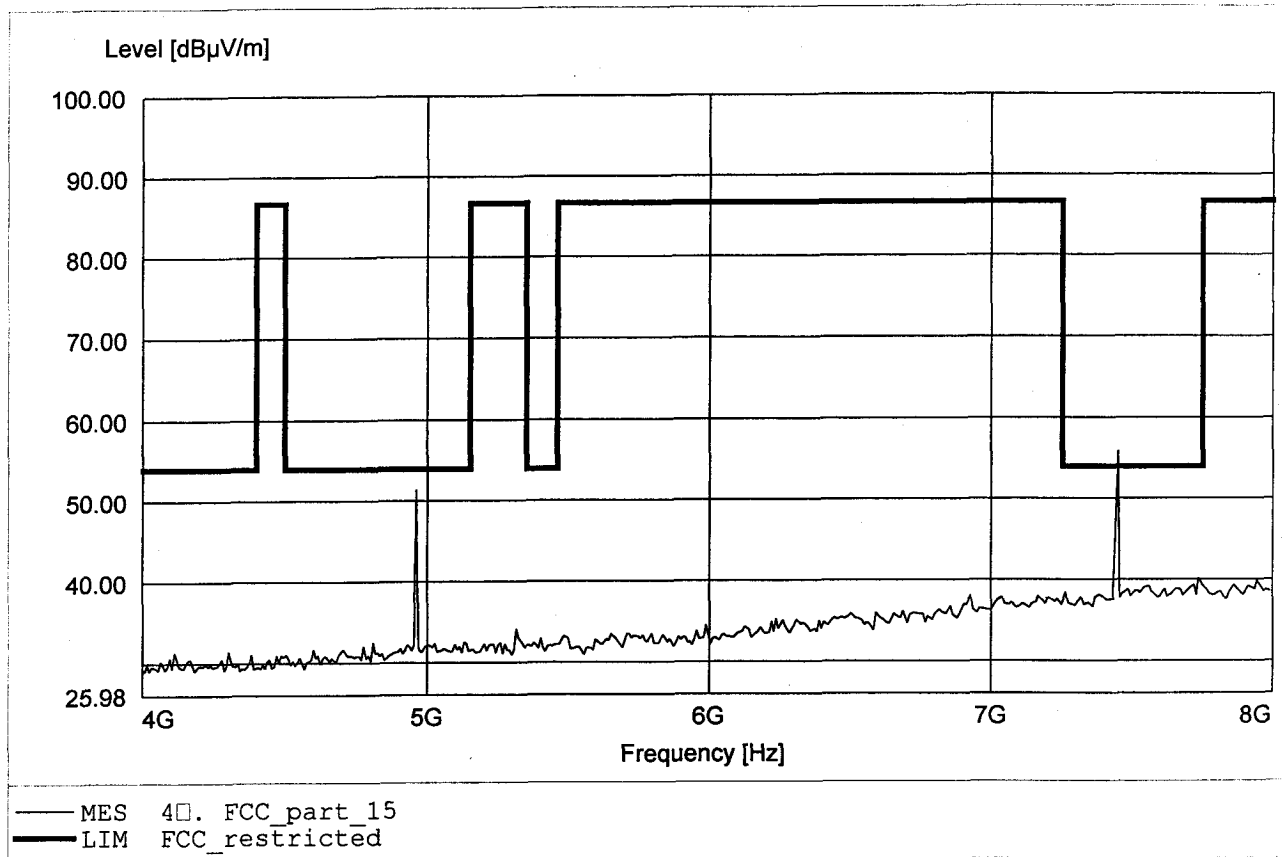


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 94
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 7.447GHz, Emax: 31.85dBμV/m, RBW: 1MHz

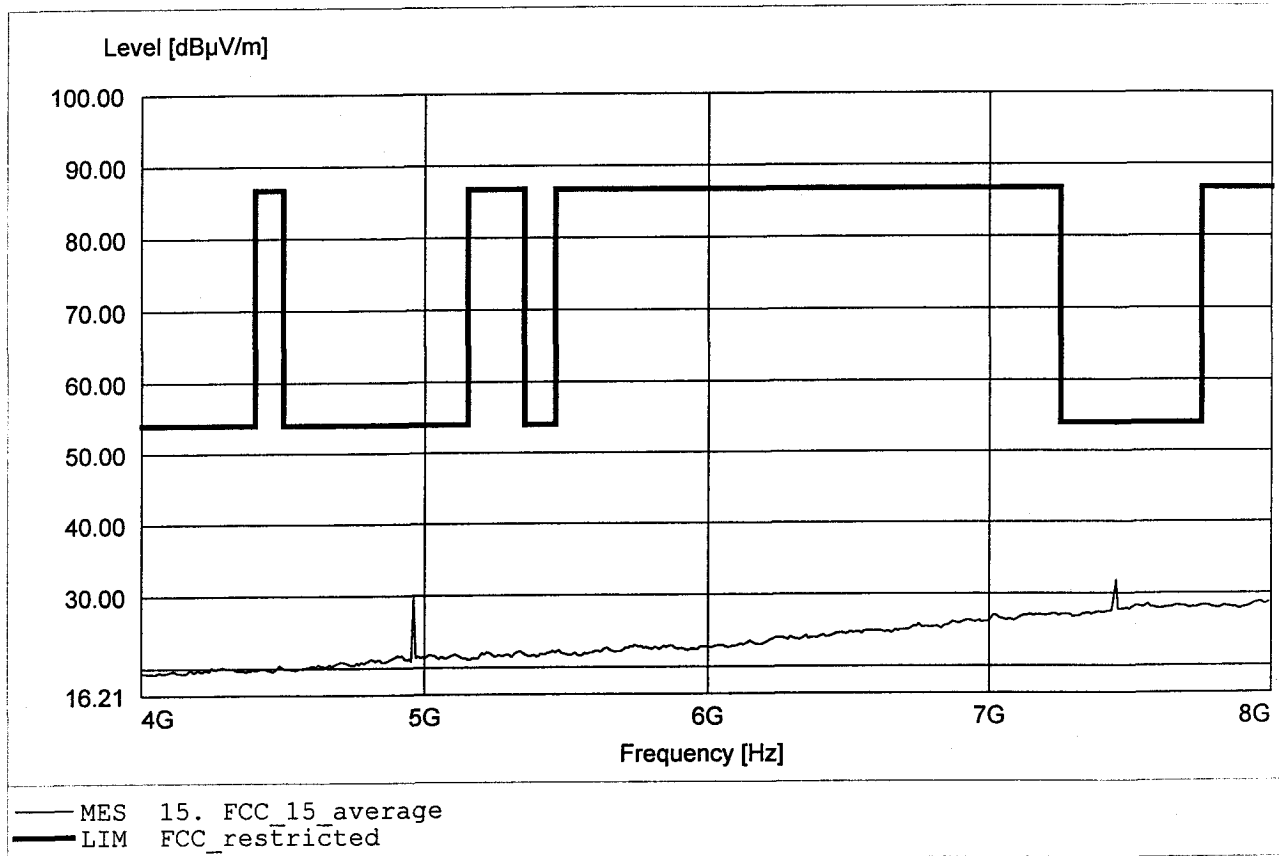


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 94
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 7.447GHz, Emax: 48.53dBµV/m, RBW: 1MHz

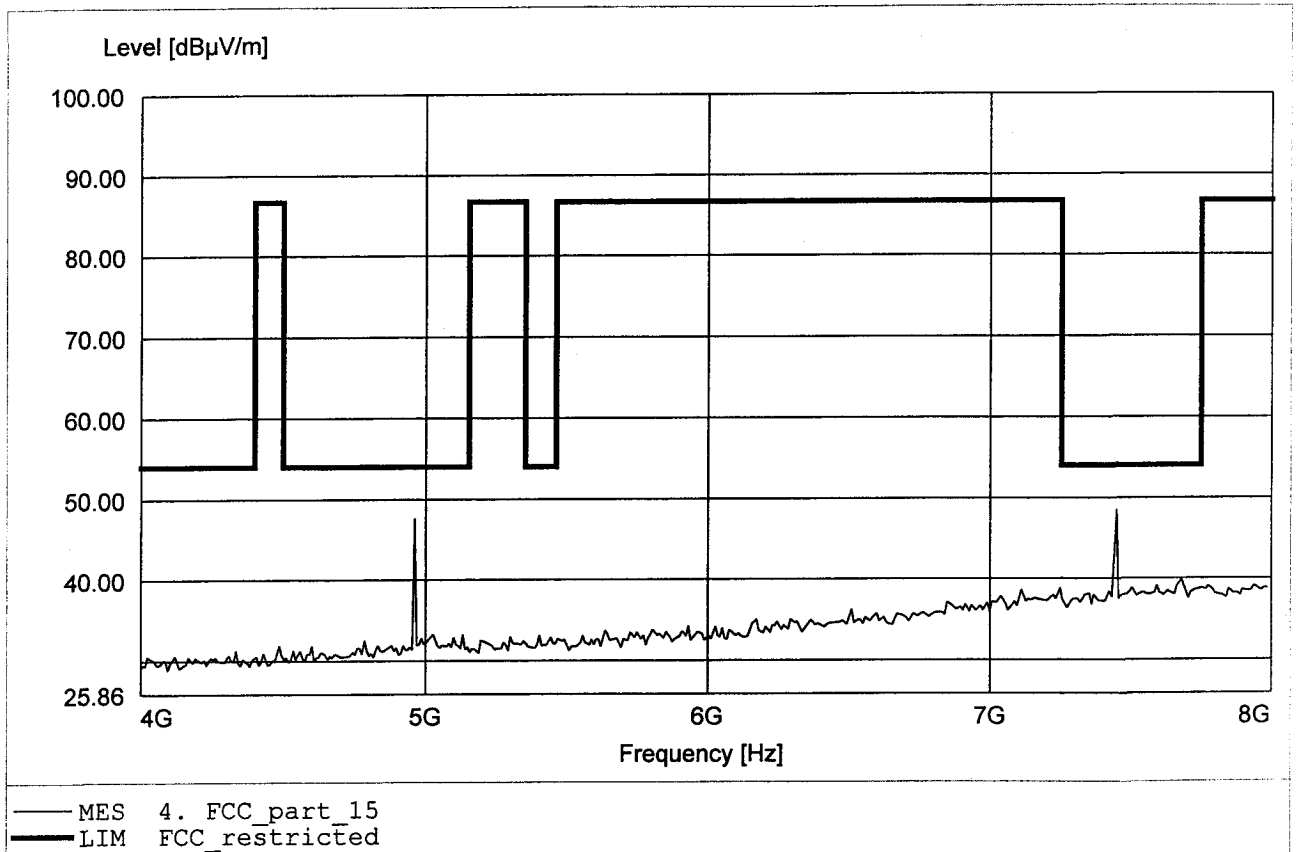


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 94
 Model: GN9120 2G4 FCC
 Approval Holder: GnNetcom
 Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
 Test Site / Operator: ETS / Mr. Hoppe
 Test Specification: according to S15.247, peak detector
 Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
 Comment 2: Freq: 9.932GHz, Emax: 53.43dBµV/m, RBW: 1MHz

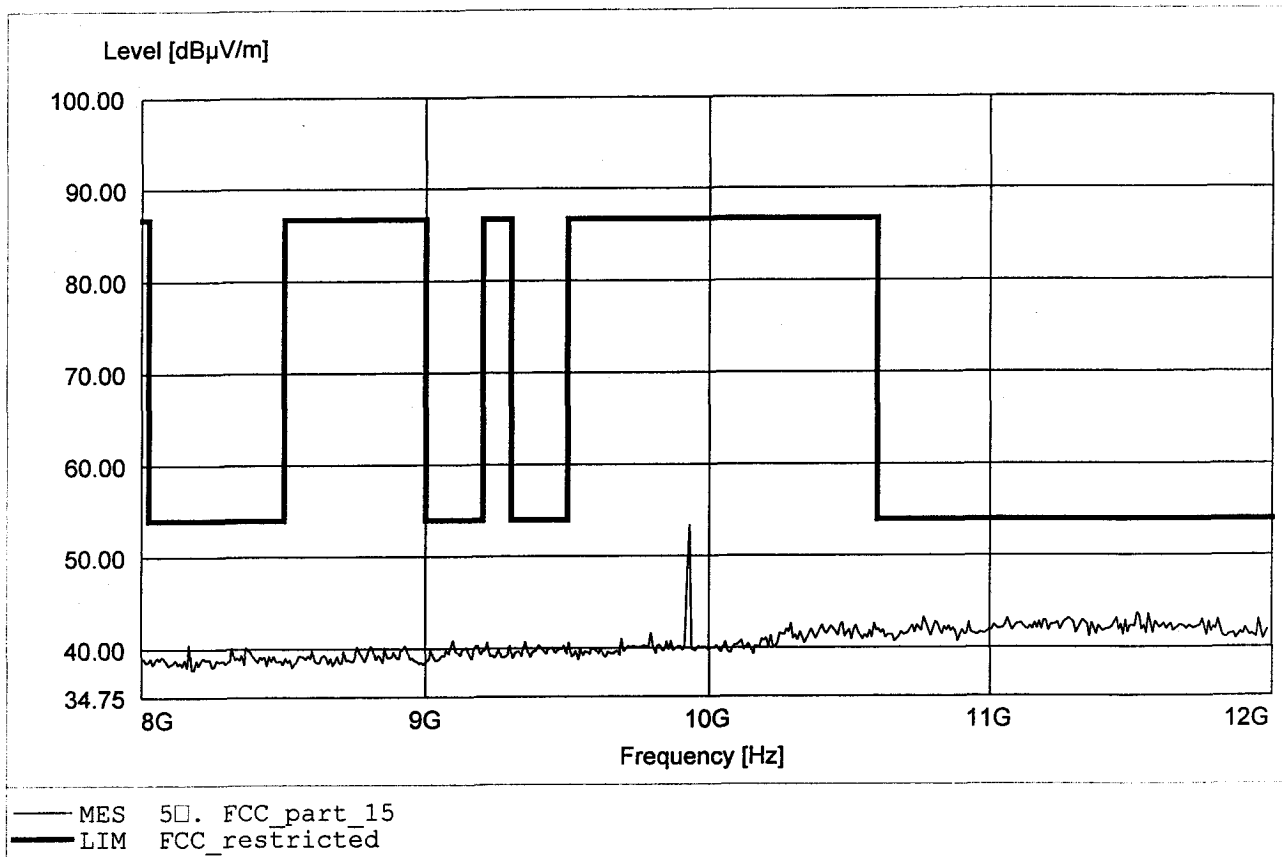


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 94
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 9.932GHz, Emax: 50.97dB μ V/m, RBW: 1MHz

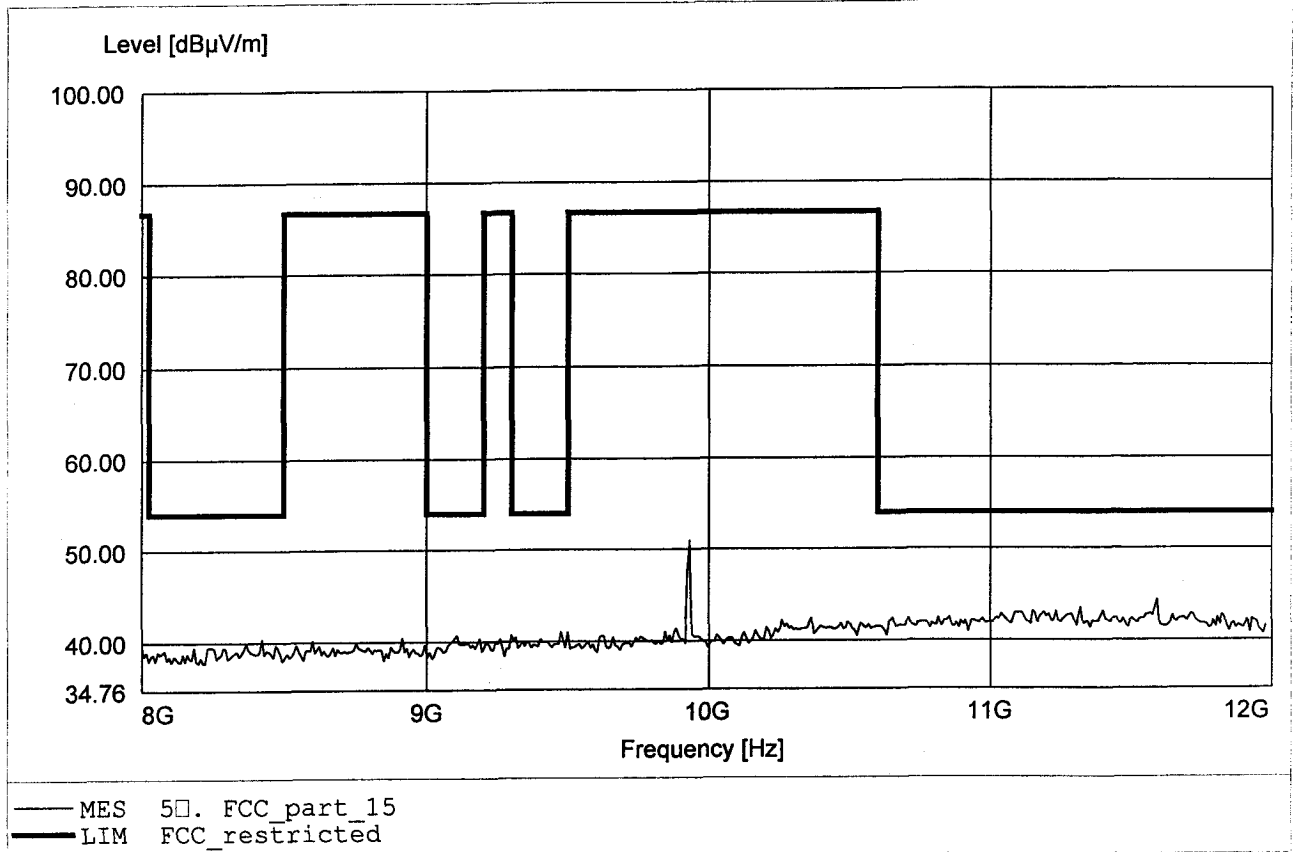


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 94
 Model: GN9120 2G4 FCC
 Approval Holder: GnNetcom
 Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
 Test Site / Operator: ETS / Mr. Hoppe
 Test Specification: according to §15.247, peak detector
 Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
 Comment 2: Freq: 14.896GHz, Emax: 56.11dBµV/m, RBW: 1MHz

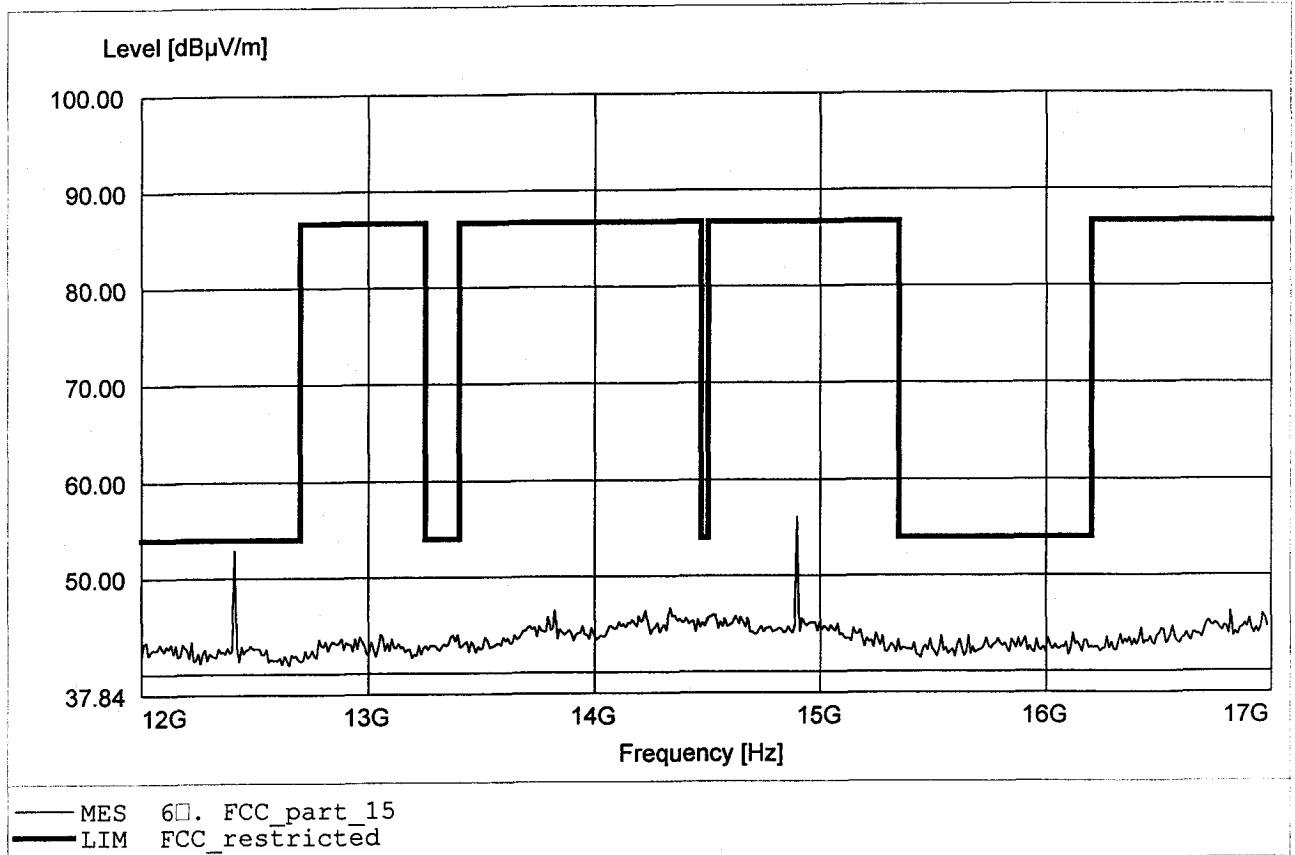


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 94
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 14.896GHz, Emax: 52.64dBµV/m, RBW: 1MHz

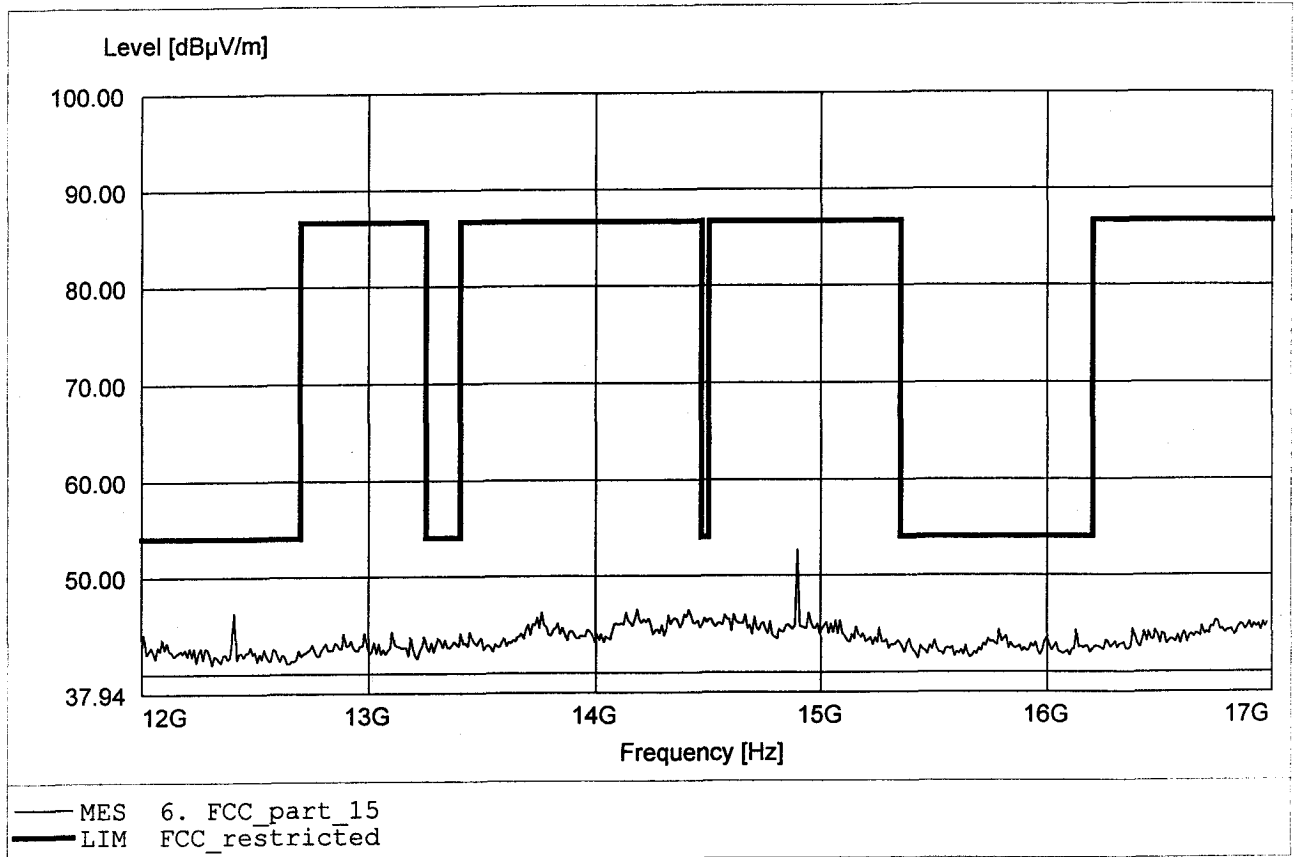


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 94
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.019GHz, Emax: 47.32dBµV/m, RBW: 1MHz

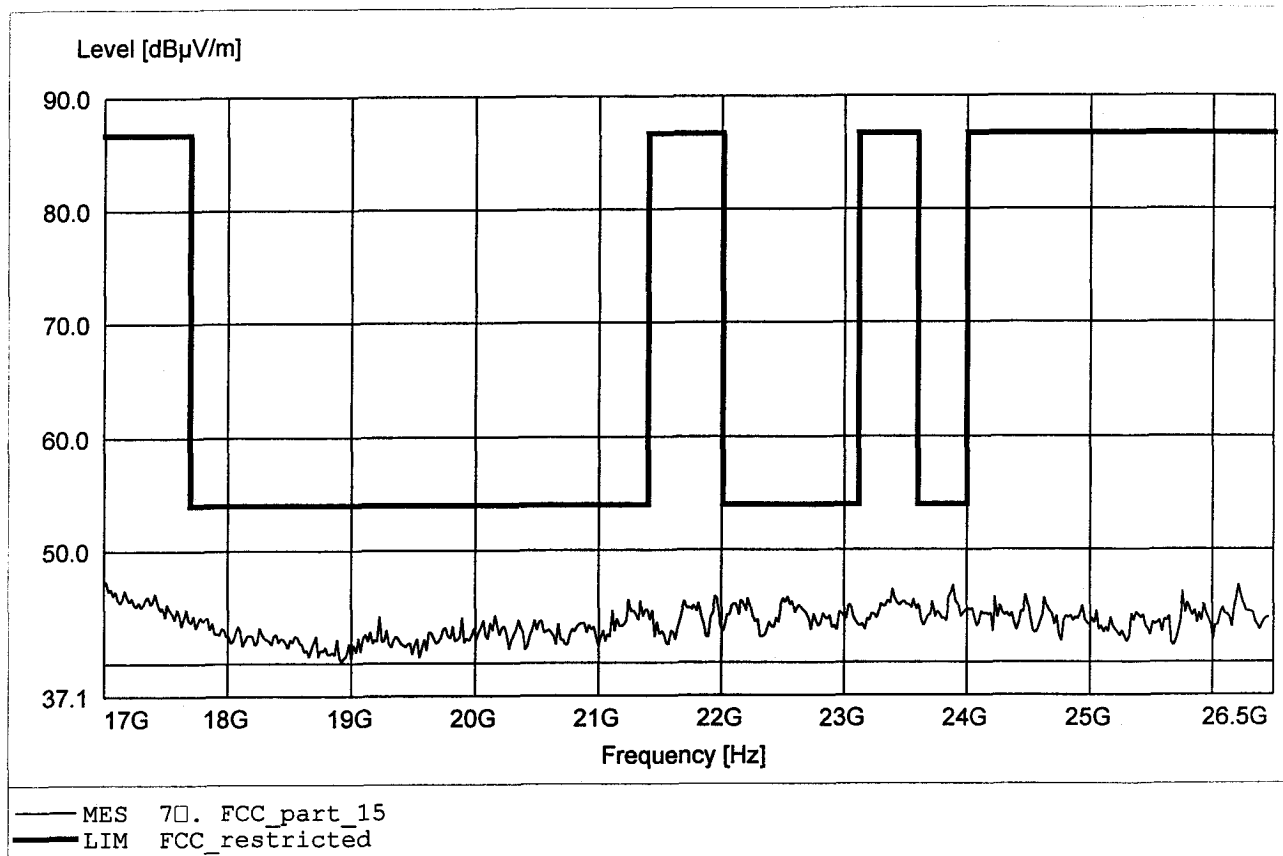

**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Haedset / Ant.: 2 / Ch.: 94
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 47.32dBµV/m, RBW: 1MHz

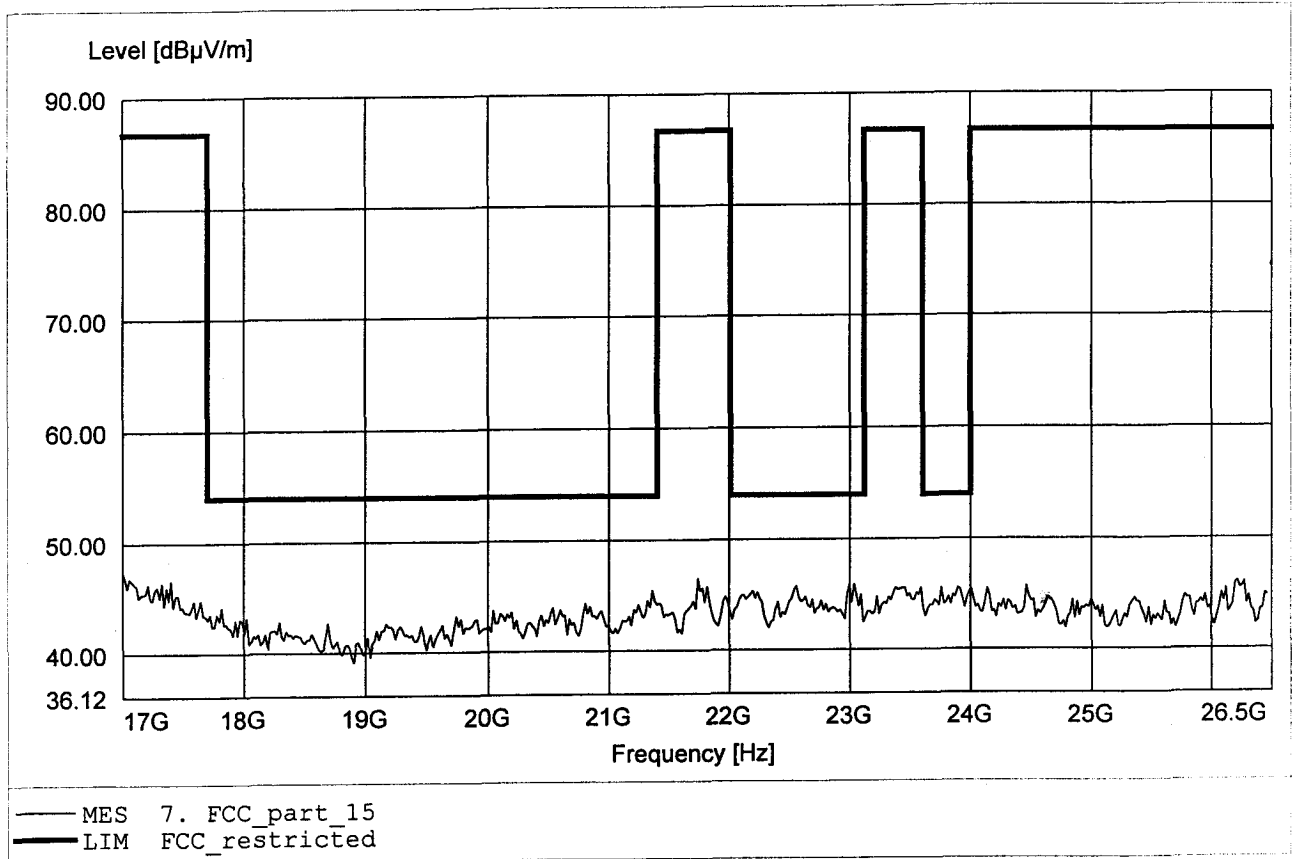



Appendix D

Spurious Emissions conducted - Transmitter operating




Appendix E

Carrier Frequency Separation



Delta 1 [T1] RBW 100 kHz RF Att 50 dB
Ref Lvl -0.01 dB VBW 100 kHz
30 dBm 872.94589178 kHz SWT 5 ms Unit dBm

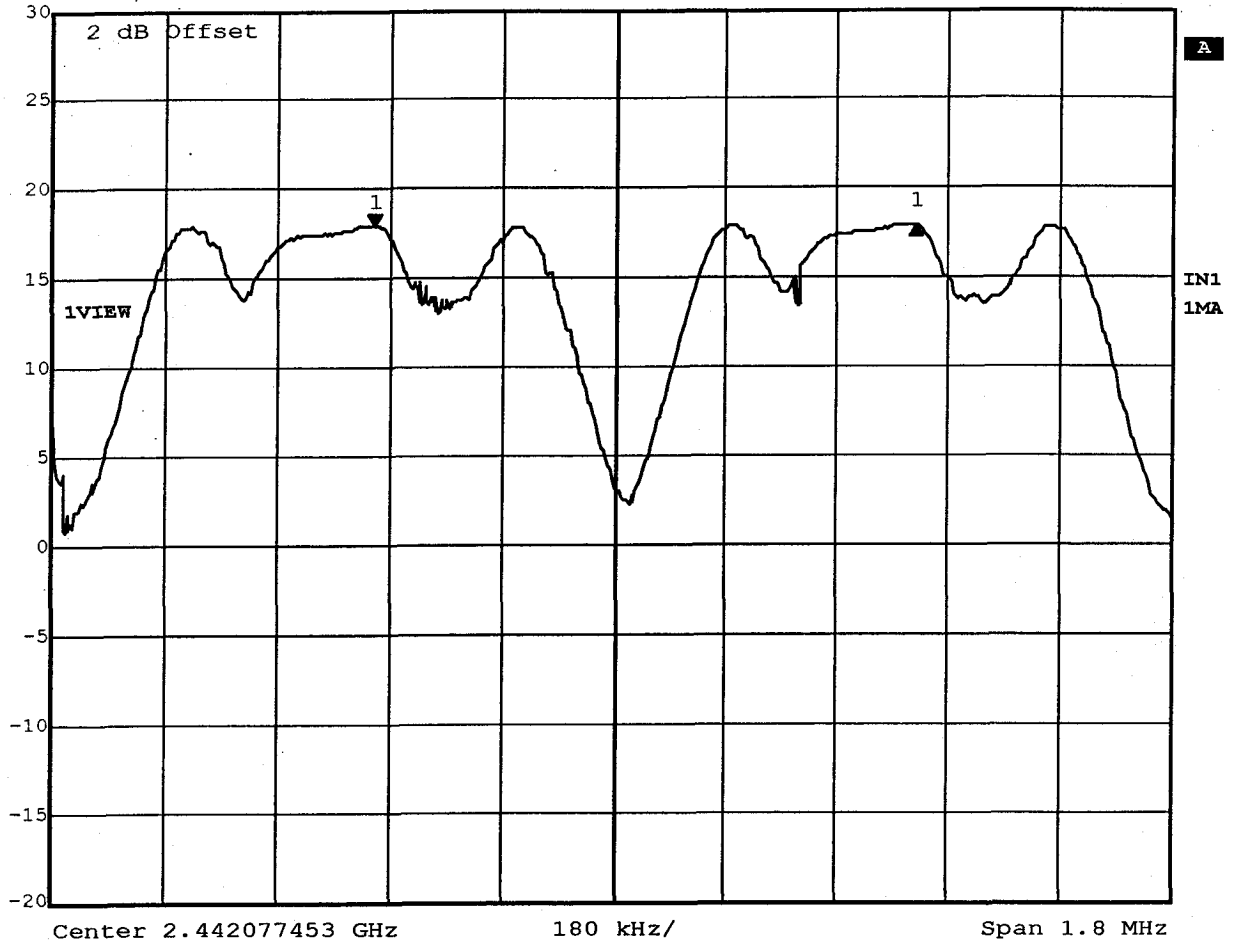

Title: Carrier Frequency Separation
Comment A: GnNetcom Wireless Haedset 2G4 FCC Haedset
Date: 27.NOV.2002 08:53:34




Appendix F

Number of Hopping Frequencies




Marker 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl 16.90 dBm VBW 50 kHz
27.5 dBm 2.41489880 GHz SWT 25 ms Unit dBm

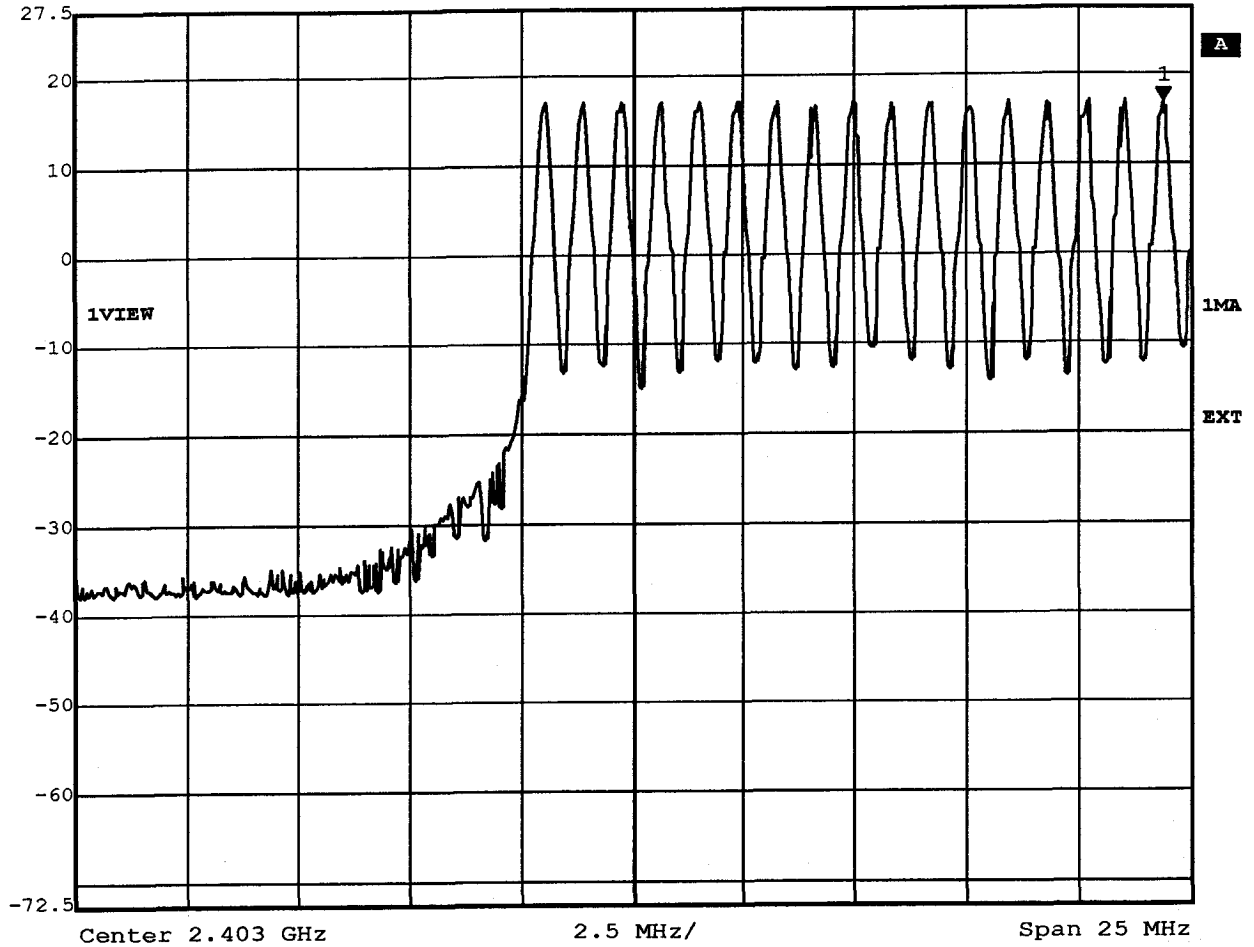

Title: Number of Hopping Frequencies Ch.: 0-16
Comment A: GnNetcom Wireless Headset 2G4 FCC Headset
Date: 26.NOV.2002 14:15:35




Marker 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl 16.65 dBm VBW 50 kHz
27.5 dBm 2.44002405 GHz SWT 25 ms Unit dBm

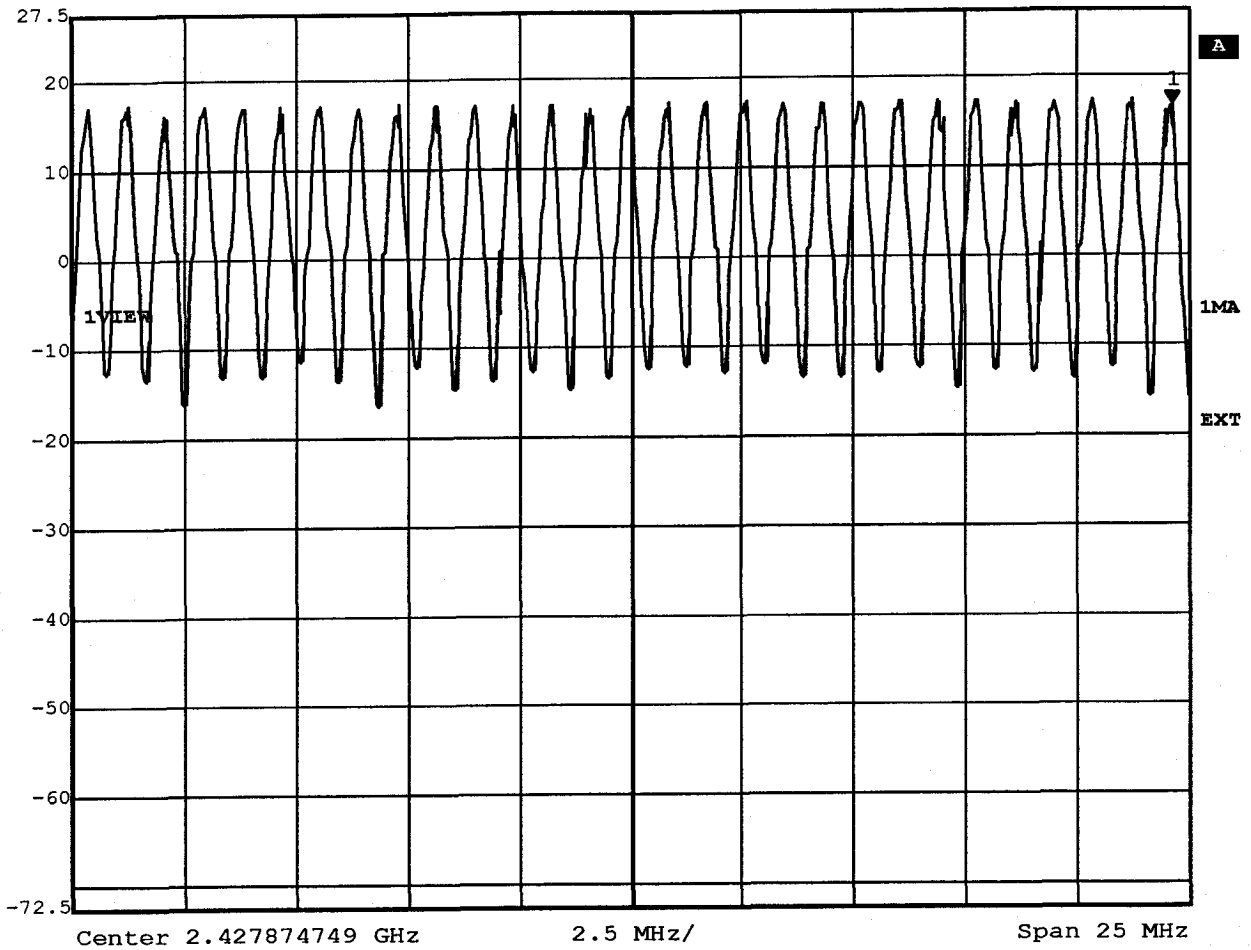

Title: Number of Hopping Frequencies Ch.: 17-45
Comment A: GnNetcom Wireless Headset 2G4 FCC Headset
Date: 26.NOV.2002 14:10:50




Marker 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl 17.61 dBm VBW 50 kHz
27.5 dBm 2.46502410 GHz SWT 25 ms Unit dBm

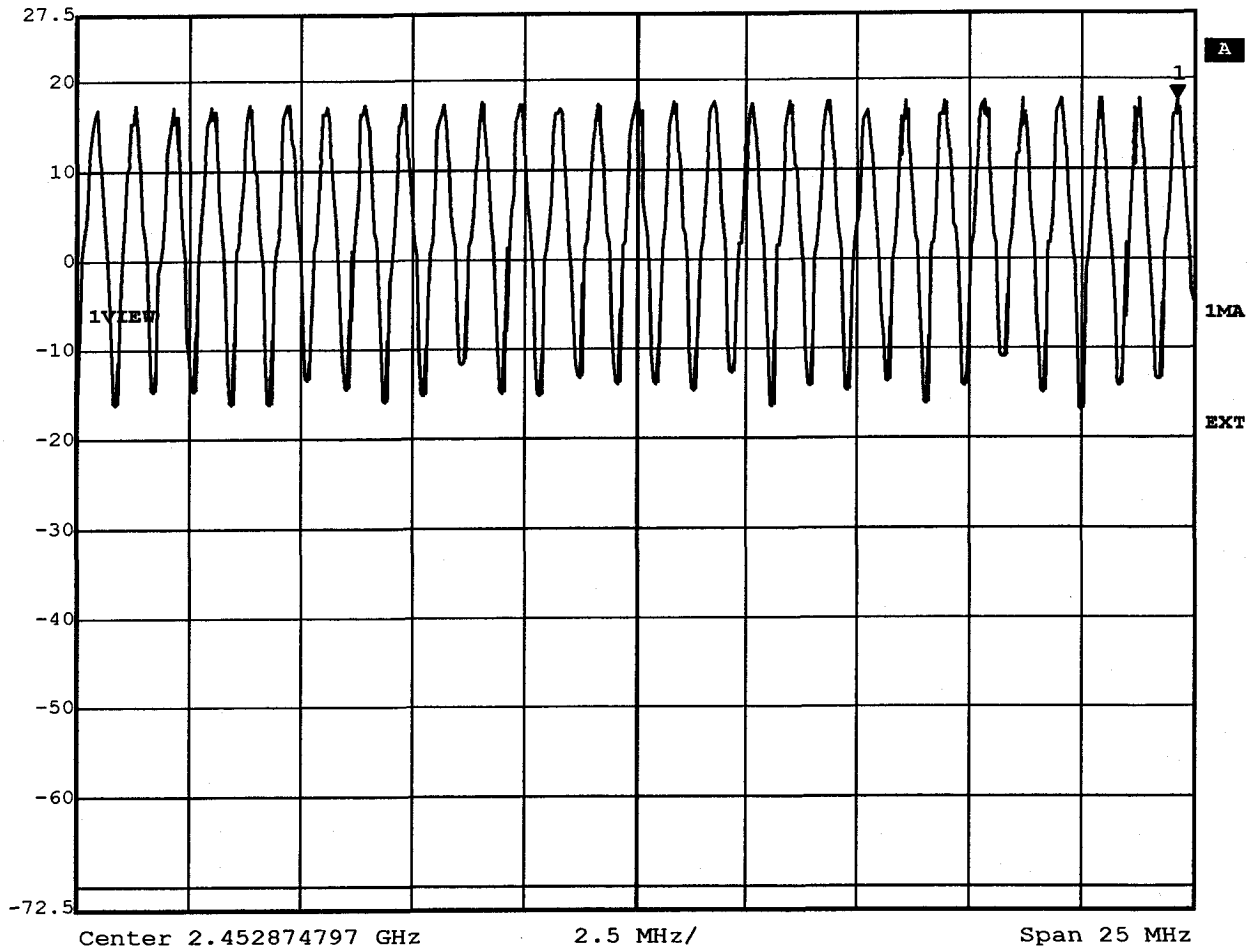

Title: Number of Hopping Frequencies Ch.: 46-74
Comment A: GnNetcom Wireless Headset 2G4 FCC Headset
Date: 26.NOV.2002 14:02:30



Ref Lvl	27.5 dBm	Marker 1 [T1]	17.59 dBm	RBW	50 kHz	RF Att	50 dB
			2.46580060 GHz	VBW	50 kHz	Unit	dBm
				SWT	25 ms		

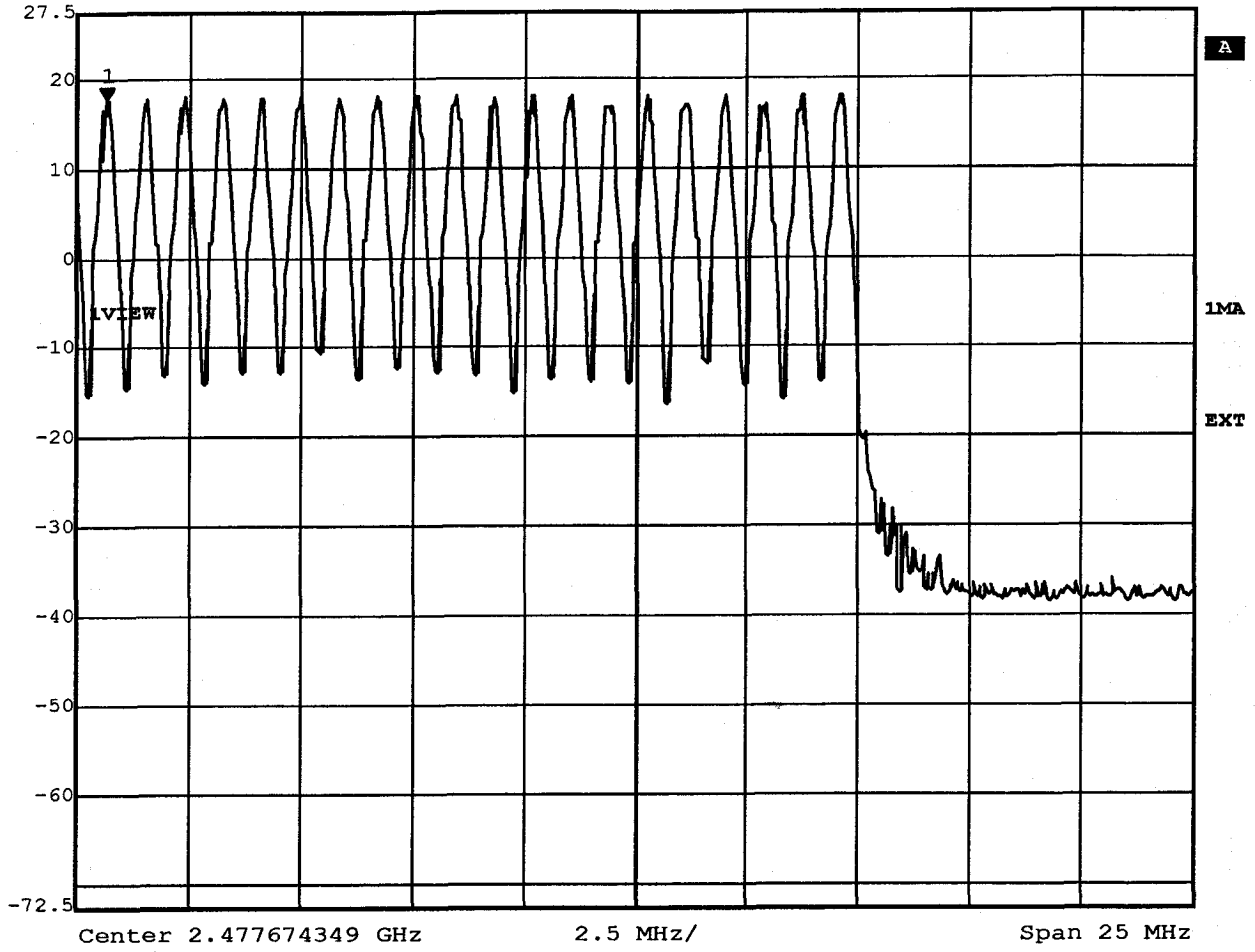

Title: Number of Hopping Frequencies Ch.: 75-94
Comment A: GnNetcom Wireless Headset 2G4 FCC Headset
Date: 26.NOV.2002 13:57:03




Appendix G

Time of Occupancy (Dwell Time)




Delta 1 [T1] RBW 1 MHz RF Att 50 dB
Ref Lvl -1.20 dB VBW 1 MHz
25 dBm 837.474950 μ s SWT 2.1 ms Unit dBm

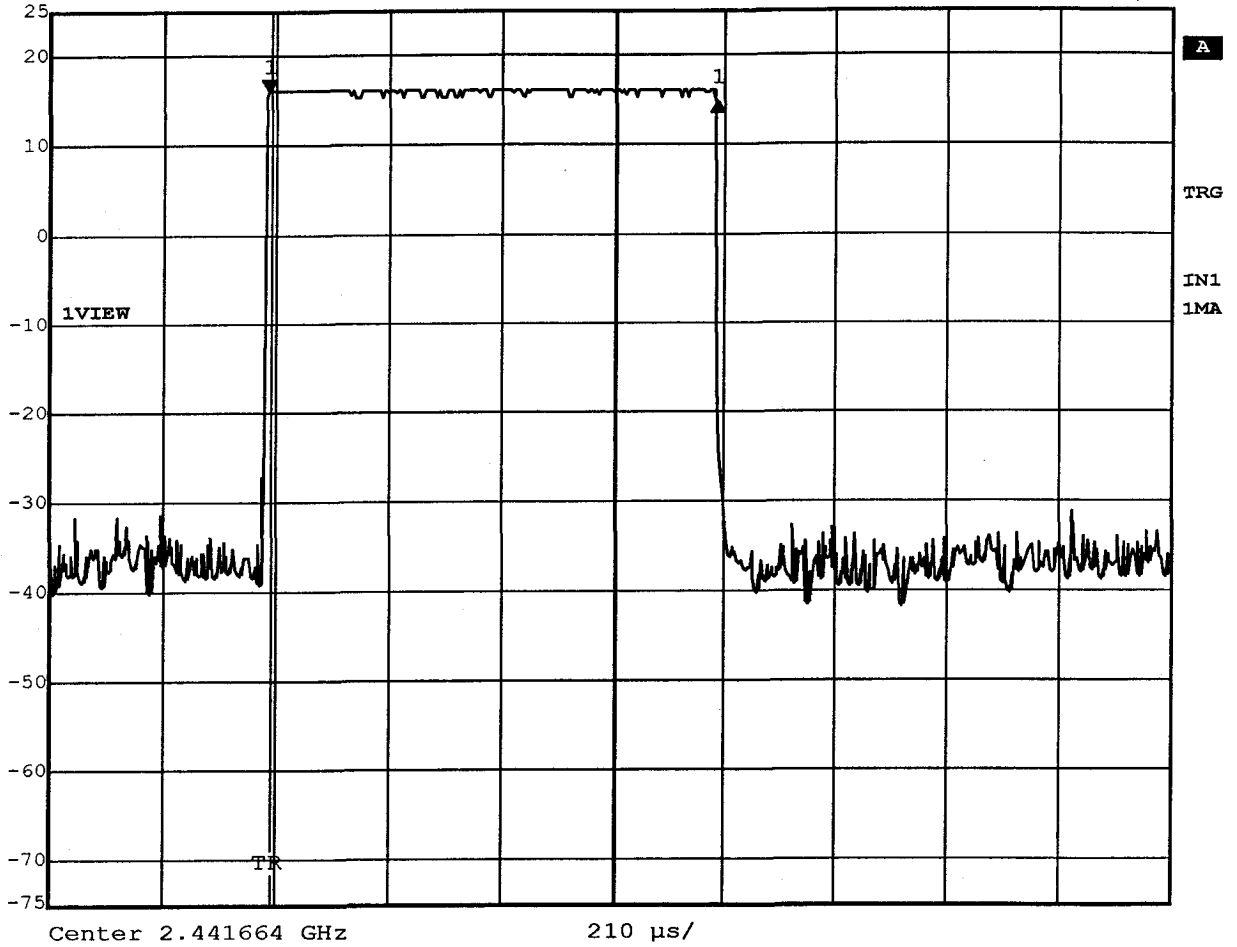

Title: Time of occupancy (Hopping) 40 events * 837.475 μ s = 33.50ms
Comment A: GnNetcom Wireless Haedset 2G4 FCC Haedset
Date: 28.NOV.2002 13:28:30



Delta 2 [T1] RBW 1 MHz RF Att 60 dB
Ref Lvl -0.11 dB VBW 1 MHz
30 dBm 10.030060 ms SWT 19 ms Unit dBm

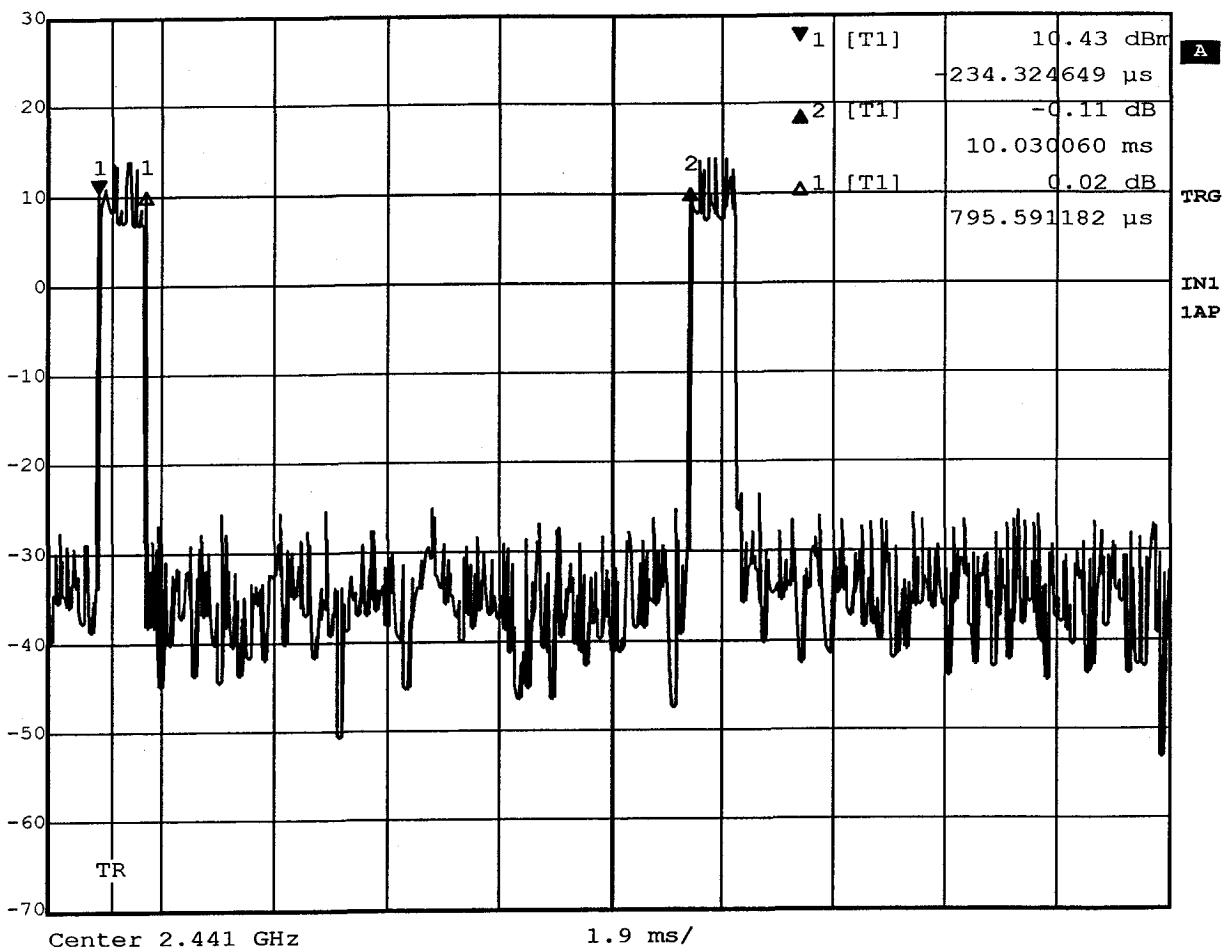

Title: Duty Cycle
Comment A: GnNetcom Wireless Hadset 2G4 FCC Haedset
Date: 27.NOV.2002 09:44:09




Appendix H

20dB Bandwidth




Delta 1 [T1] RBW 10 kHz RF Att 50 dB
Ref Lvl -0.62 dB VBW 10 kHz
30 dBm 837.67535070 kHz SWT 56 ms Unit dBm

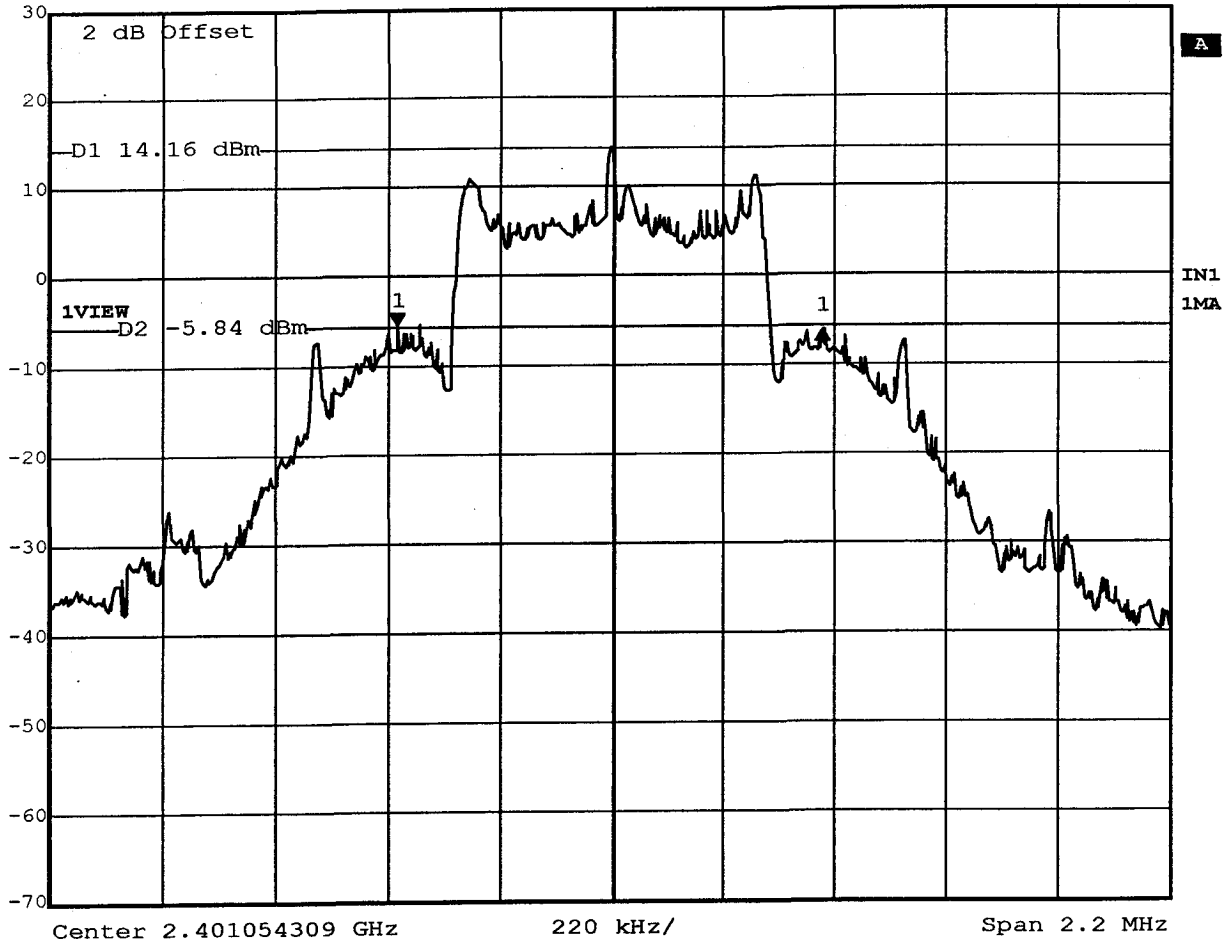

Title: -20 dB Bandwidth Ch.: 0
Comment A: GnNetcom Wireless Haedset 2G4 FCC Haedset
Date: 27.NOV.2002 08:38:08




Delta 1 [T1] RBW 10 kHz RF Att 50 dB
Ref Lvl 0.41 dB VBW 10 kHz
30 dBm 824.44889780 kHz SWT 56 ms Unit dBm

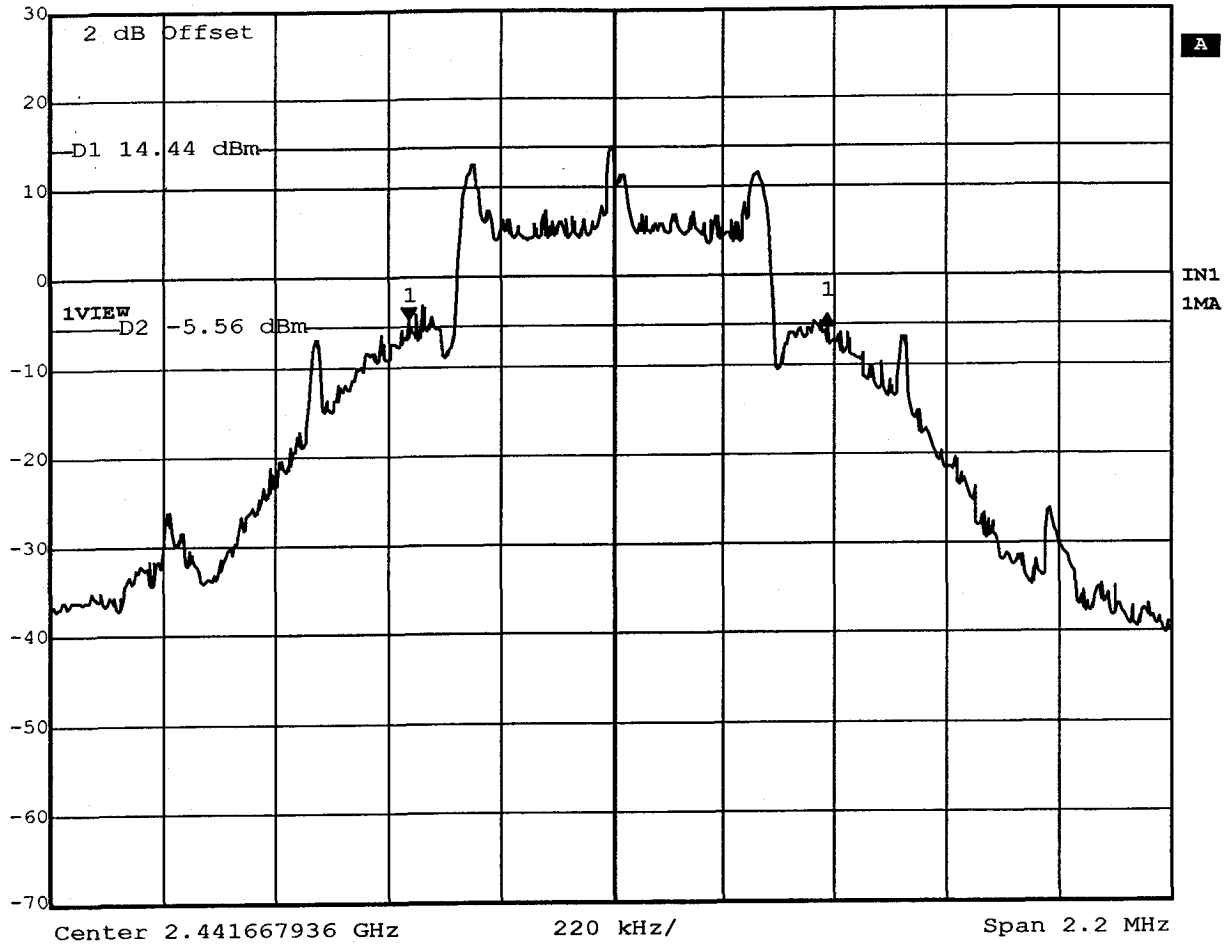

Title: -20 dB Bandwidth Ch.: 47
Comment A: GnNetcom Wireless Hadeset 2G4 FCC Hadeset
Date: 27.NOV.2002 09:10:25



Delta 1 [T1] RBW 10 kHz RF Att 50 dB
Ref Lvl -0.39 dB VBW 10 kHz
30 dBm 771.54308617 kHz SWT 56 ms Unit dBm

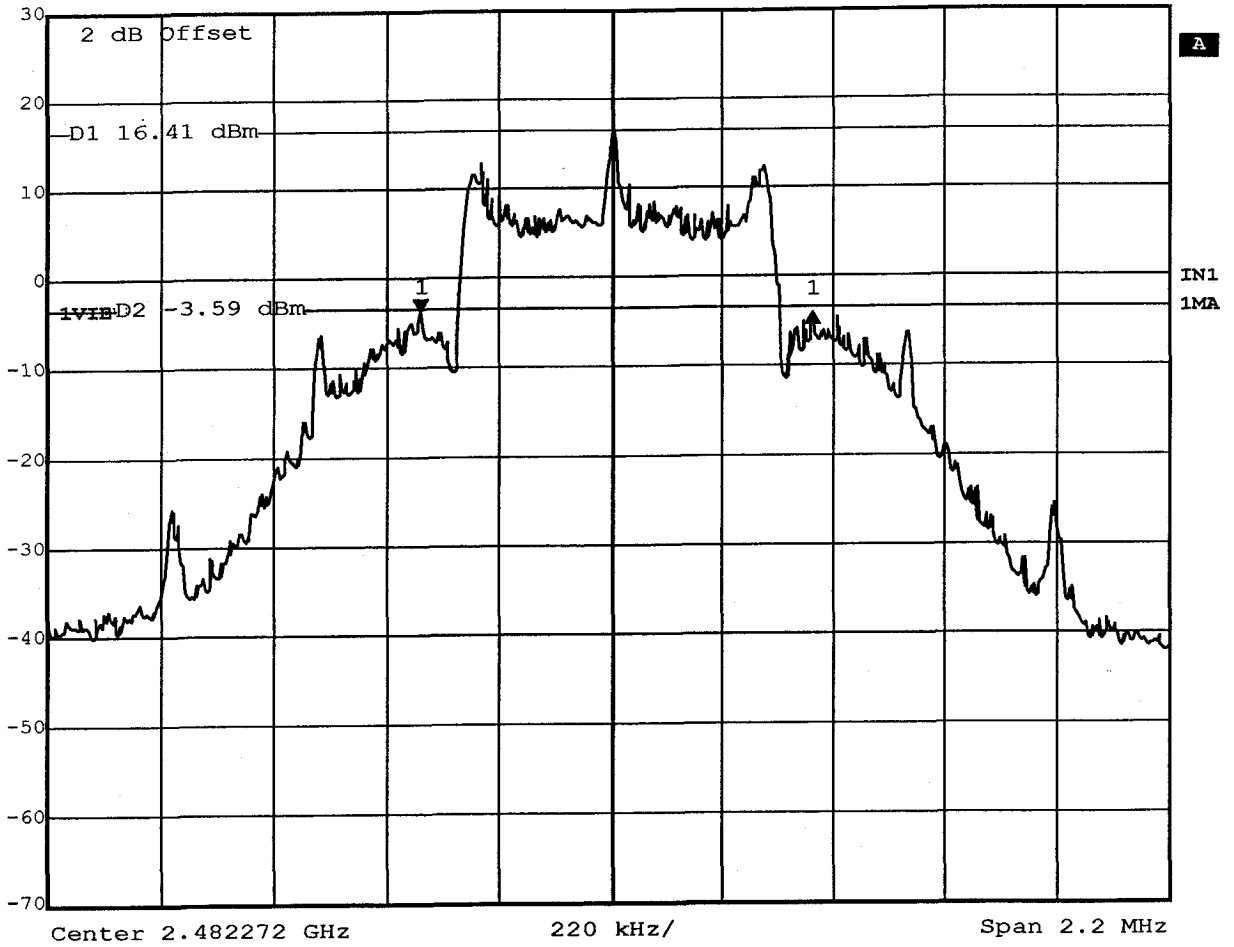

Title: -20 dB Bandwidth Ch.: 94
Comment A: GnNetcom Wireless Hadeset 2G4 FCC Hadeset
Date: 27.NOV.2002 09:14:33




Appendix I

Band-edge Compliance of RF Emissions




Marker 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl -2.06 dBm VBW 50 kHz
30 dBm 2.40059719 GHz SWT 5 ms Unit dBm

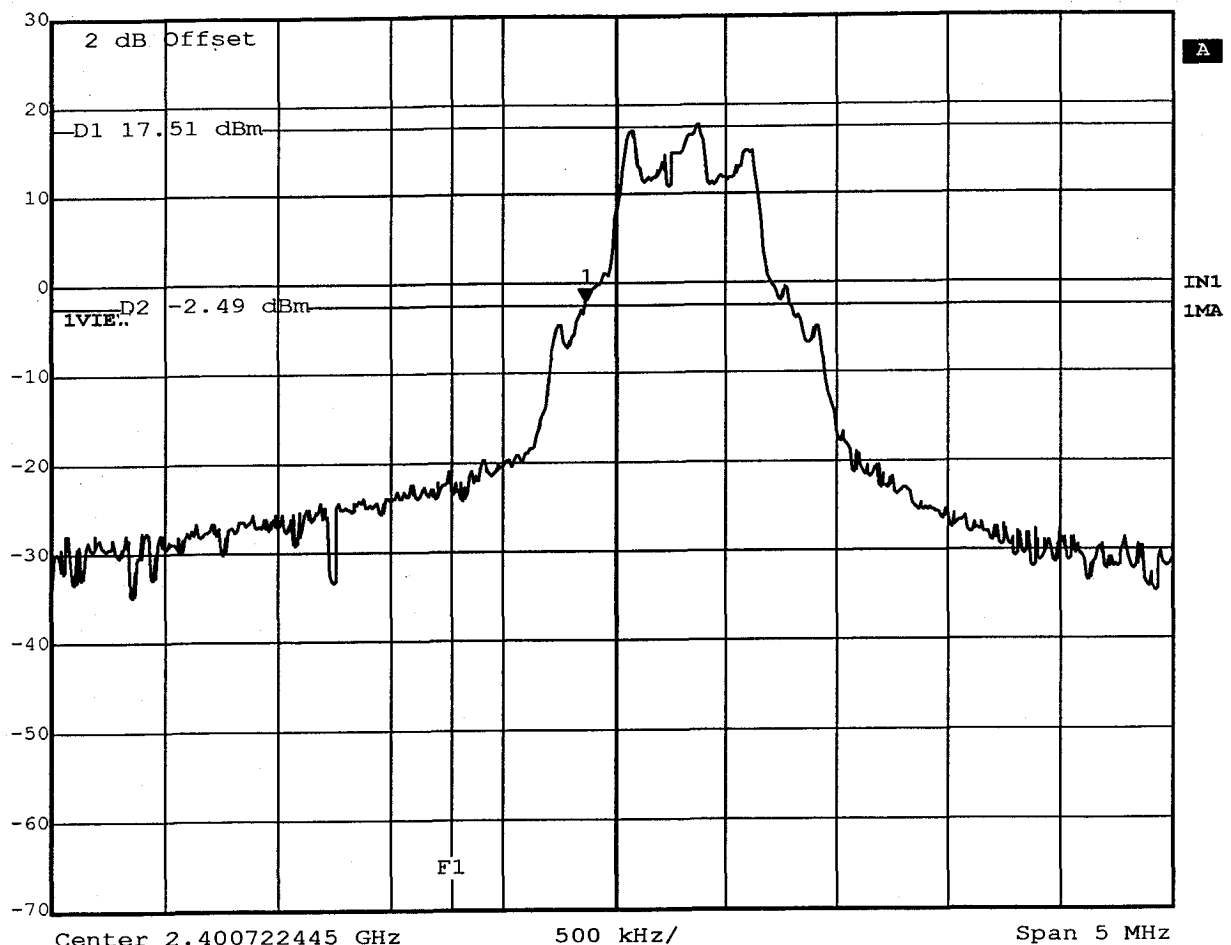

Title: Band-edge Compliance of RF Conducted Emissions Ch.: 0
Comment A: GnNetcom Wireless Haedst 2G4 FCC Haedset
Date: 27.NOV.2002 08:57:32




Marker 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl -1.91 dBm VBW 50 kHz
30 dBm 2.48277132 GHz SWT 5 ms Unit dBm

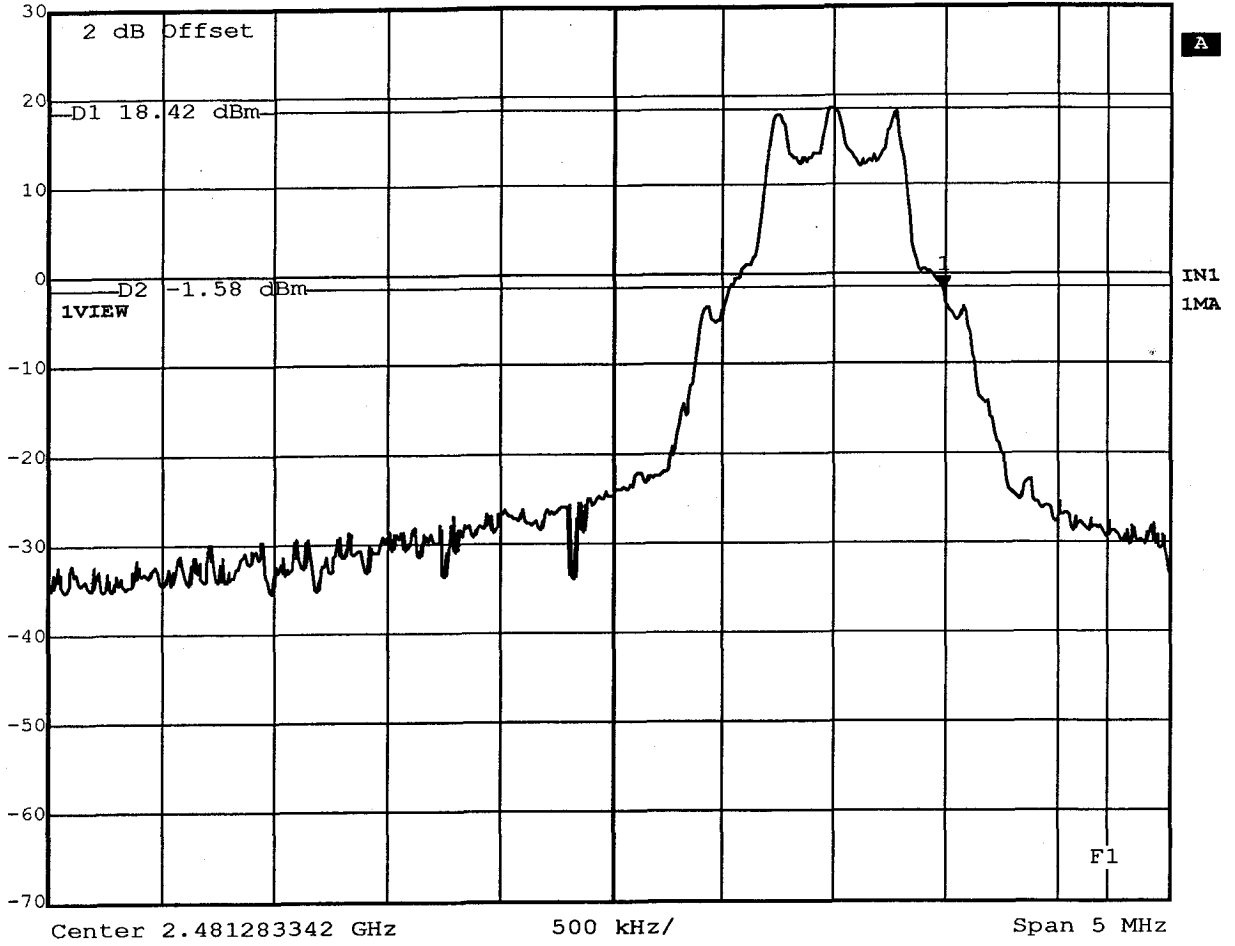

Title: Band-edge Compliance of RF Conducted Emissions Ch.: 94
Date: 27.NOV.2002 09:19:16



Marker 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl -21.59 dBm VBW 50 kHz
30 dBm 2.39990381 GHz SWT 5 ms Unit dBm

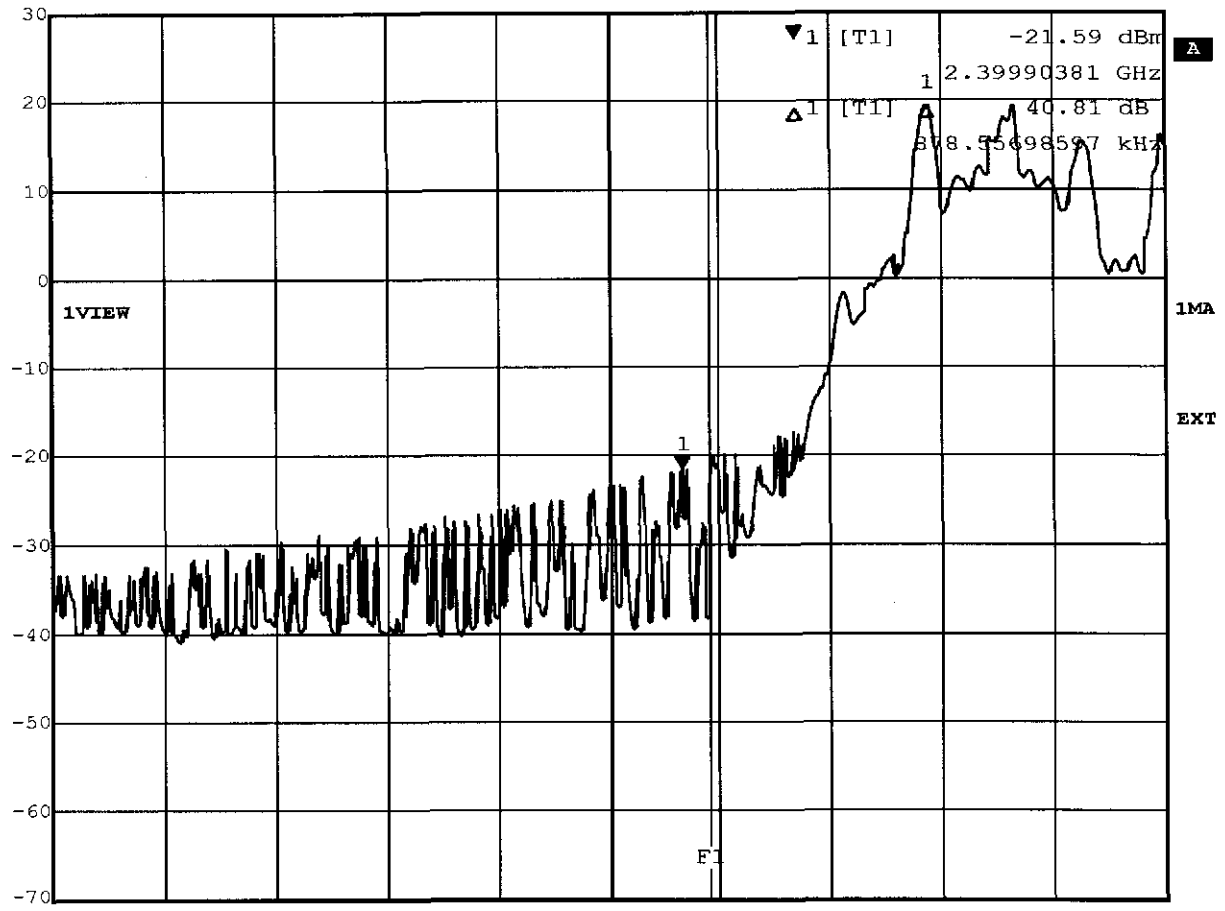


Center 2.399632064 GHz 400 kHz/ Span 4 MHz

Title: Band-edge Compliance (conducted, hopping mode)
Comment A: GnNetcom Wireless Headset 2G4 Headset
Date: 21.JAN.2003 14:53:36



Marker 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl -28.09 dBm VBW 50 kHz
30 dBm 2.48350802 GHz SWT 5 ms Unit dBm

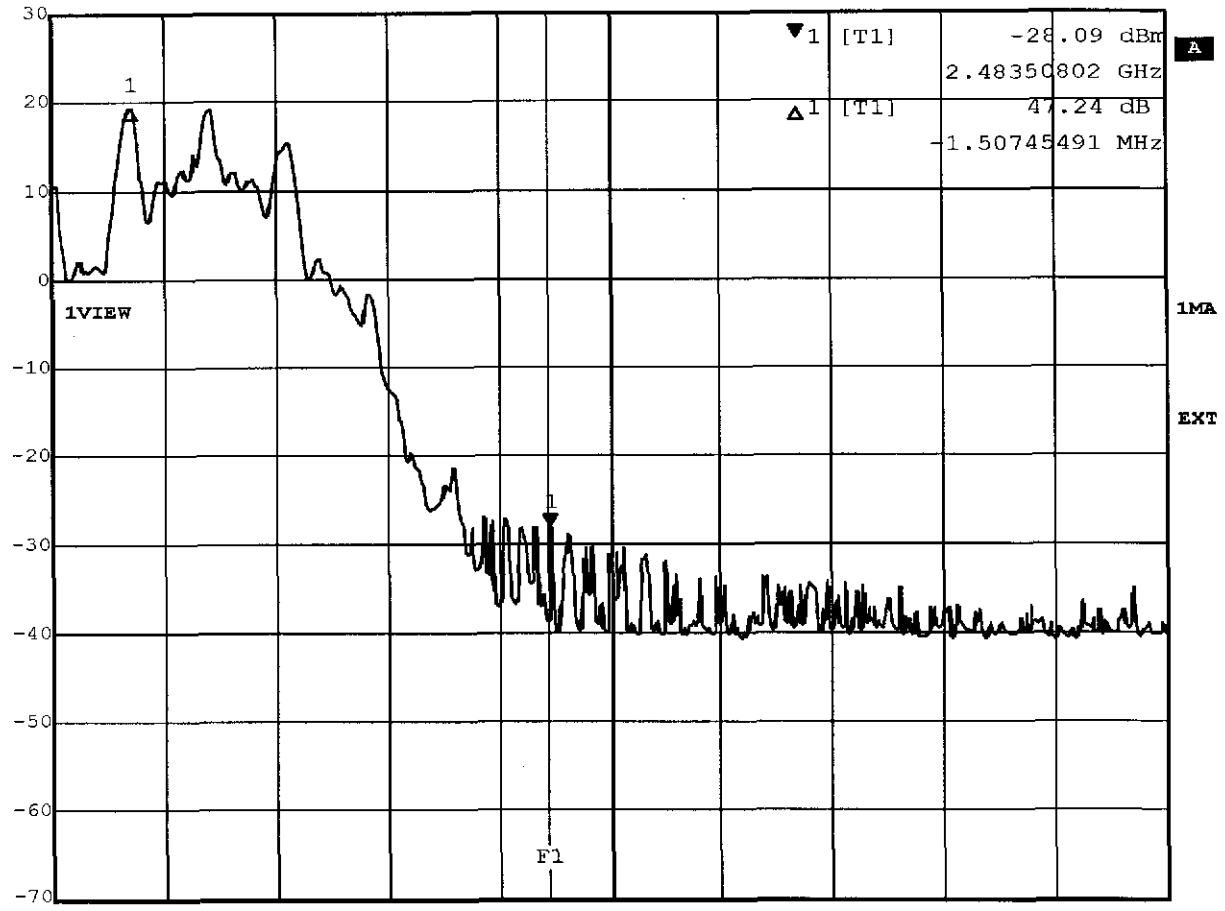

Center 2.48372 GHz 400 kHz/ Span 4 MHz

Title: Band-edge Compliance (conducted, hopping mode)
Comment A: GnNetcom Wireless Headset 2G4 Headset
Date: 21.JAN.2003 14:58:23



Appendix J

Conducted Measurement at (AC) Power Line