


Appendix B

Peak Output Power

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT/Model : 2.4 GHz Cordless Headset / Ellipse 2G4 / Ch.:0


Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V AC/DC Adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2400,71MHz Pmax:25,05dBm RBW:4MHz

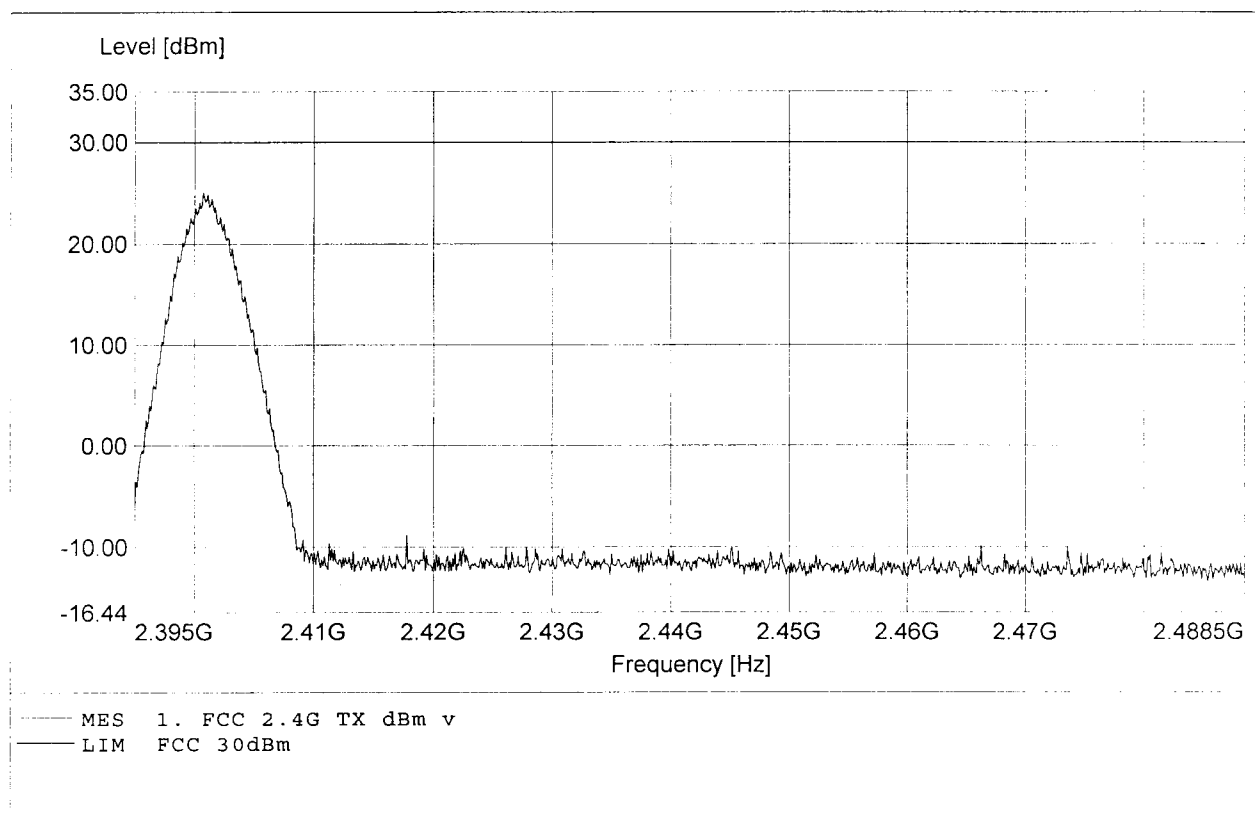

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT/Model : 2.4 GHz Cordless Headset / Ellipse 2G4 / Ch.:0


Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V AC/DC Adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2401,02MHz Pmax:23,91dBm RBW:4MHz

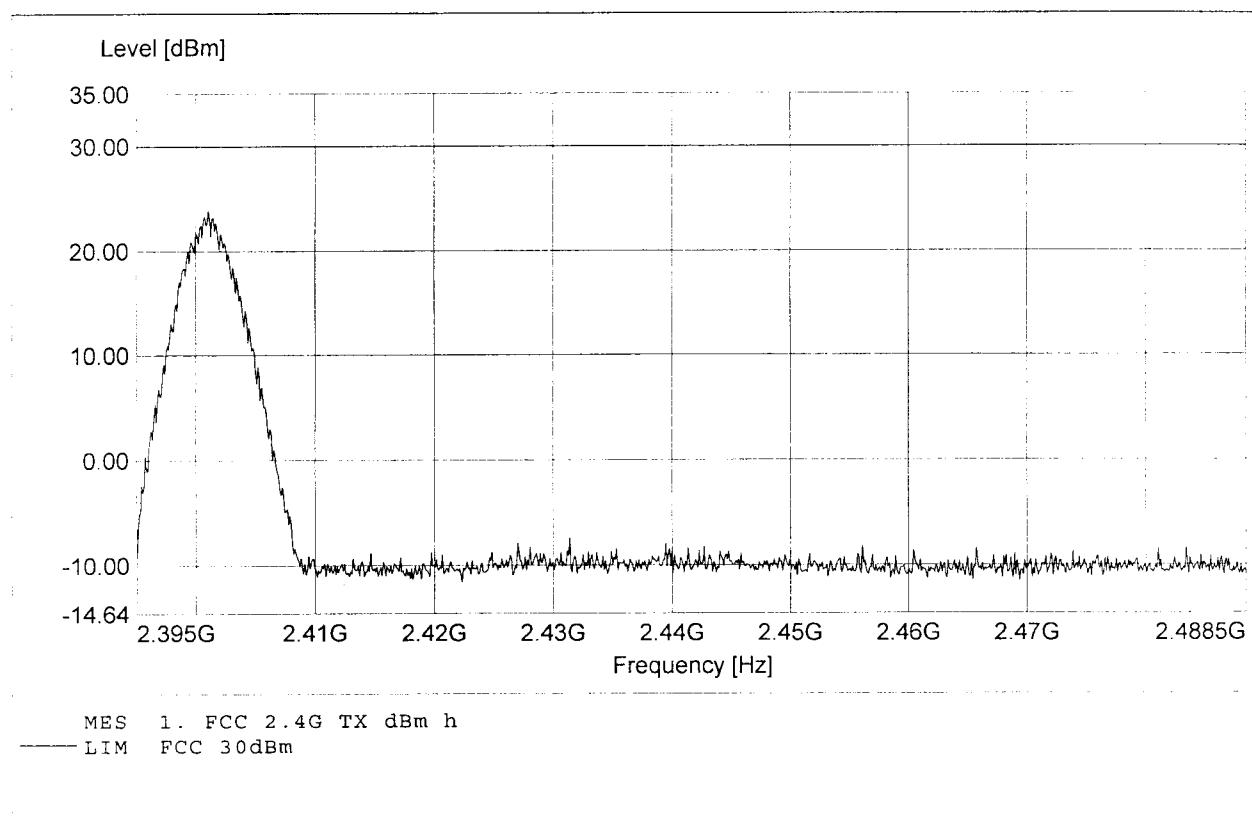

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT/Model : 2.4 GHz Cordless Headset / Ellipse 2G4 / Ch.:40


Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V AC/DC Adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2442,26MHz Pmax:25,21dBm RBW:4MHz

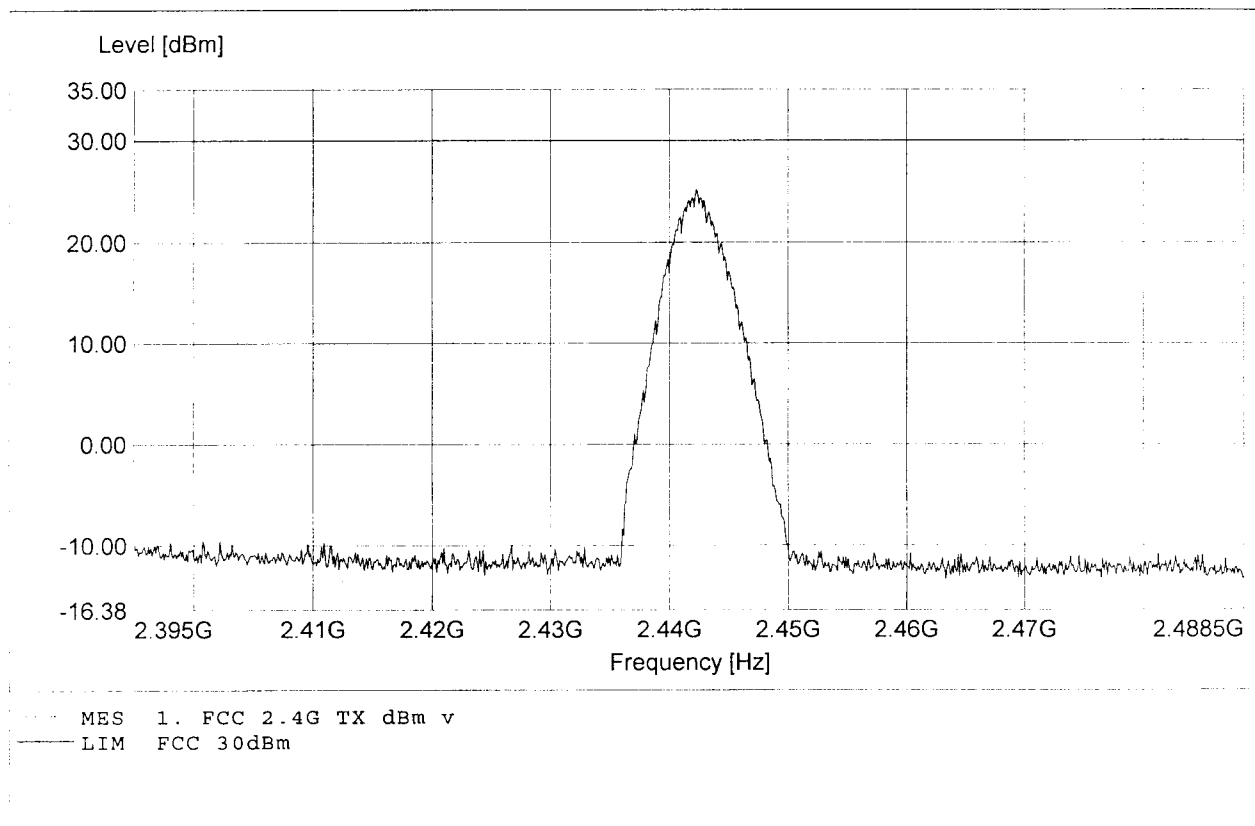

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT/Model : 2.4 GHz Cordless Headset / Ellipse 2G4 / Ch.:40


Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V AC/DC Adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2442,16MHz Pmax:23,78dBm RBW:4MHz

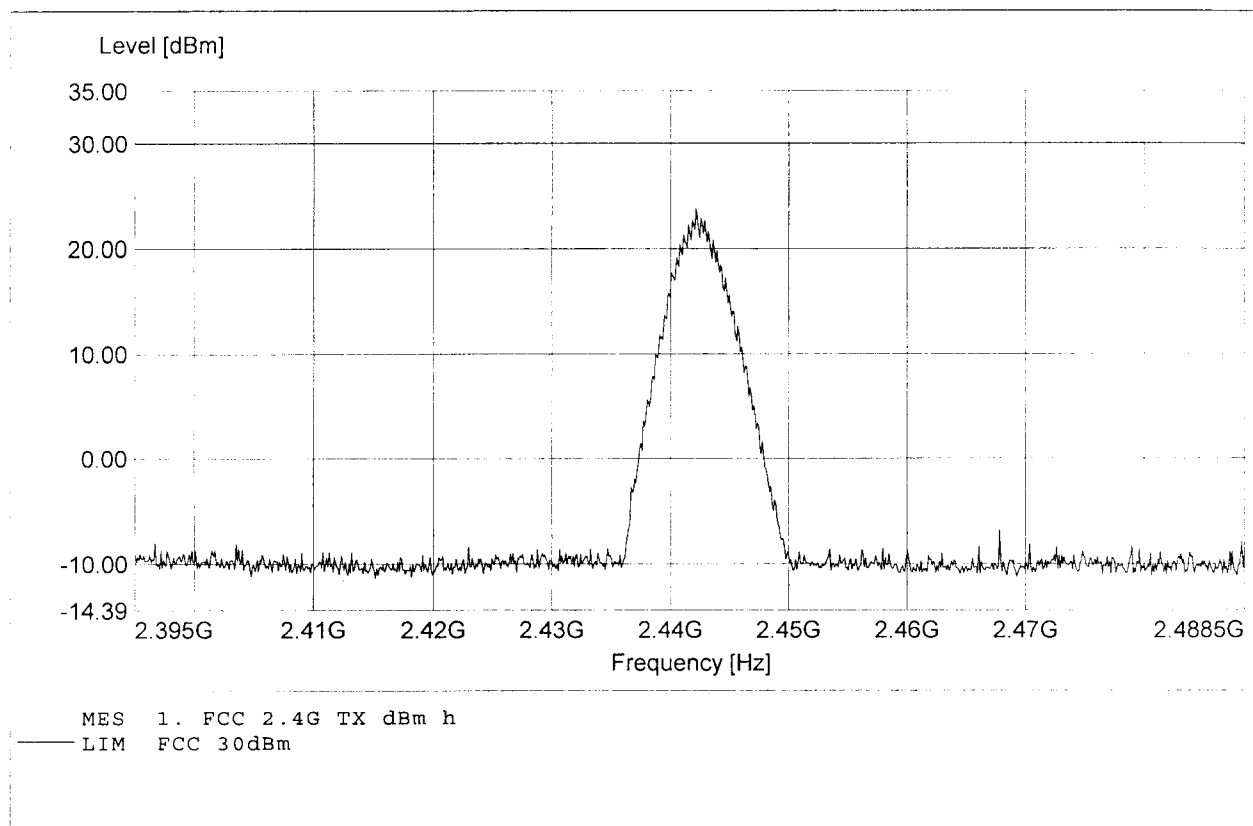

Carrier power (dBm)
FCC RULES PART 15, SUBPART C


EUT/Model : 2.4 GHz Cordless Headset / Ellipse 2G4 / Ch.:78

Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V AC/DC Adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2481,22MHz Pmax:24,57dBm RBW:4MHz

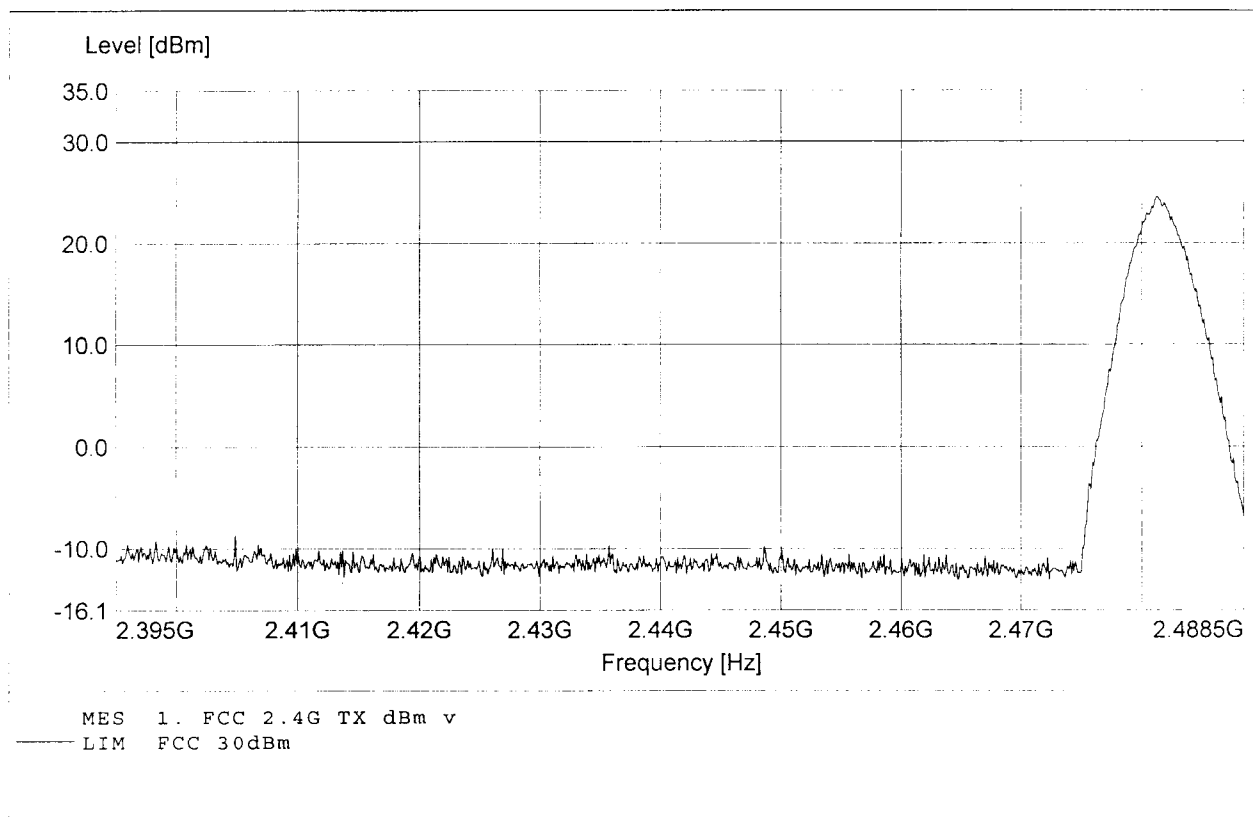

Carrier power (dBm)
FCC RULES PART 15, SUBPART C


EUT/Model : 2.4 GHz Cordless Headset / Ellipse 2G4 / Ch.:78
Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V AC/DC Adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2481,33MHz Pmax:23,27dBm RBW:4MHz

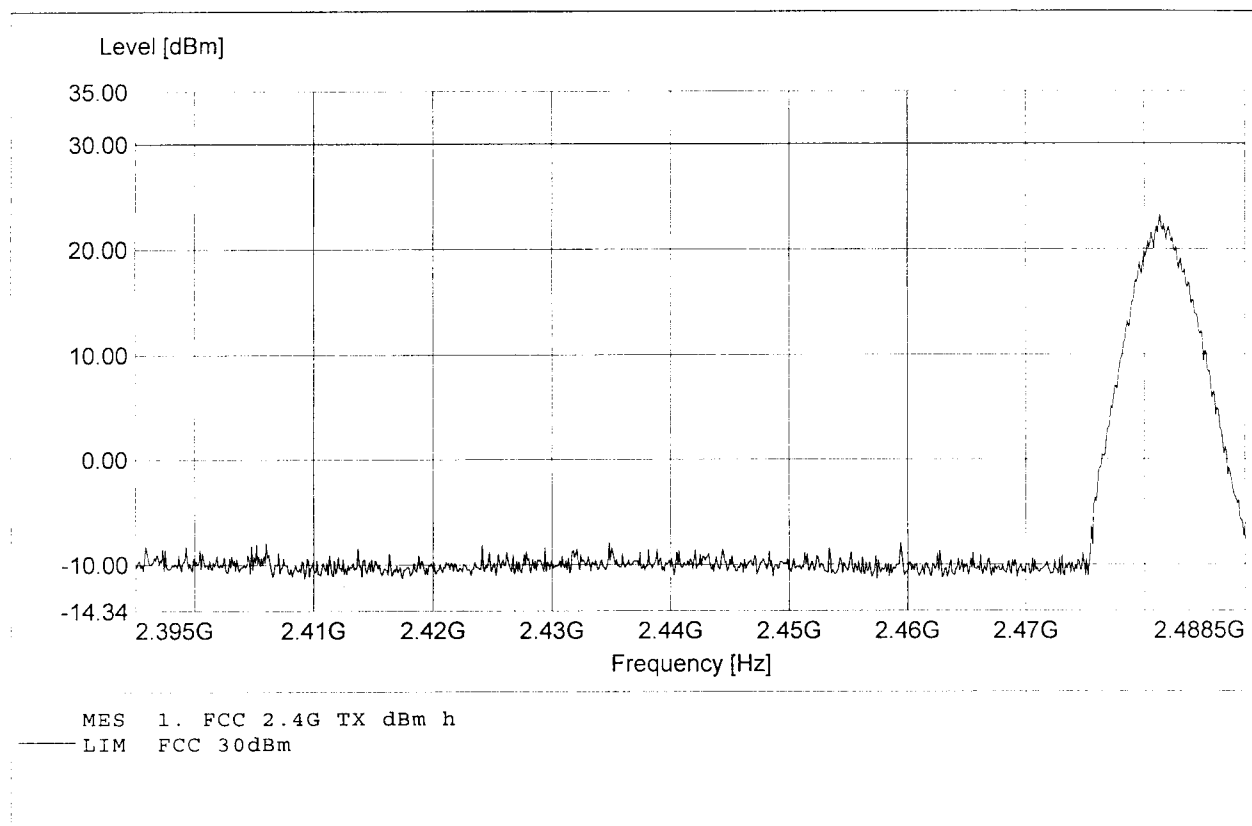

Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

EUT/Model : 2.4 GHz Cordless Headset / Ellipse 2G4 / Ch.:40


Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V AC/DC Adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2442,12MHz Pmax:121,18dBμV/m RBW=100KHz

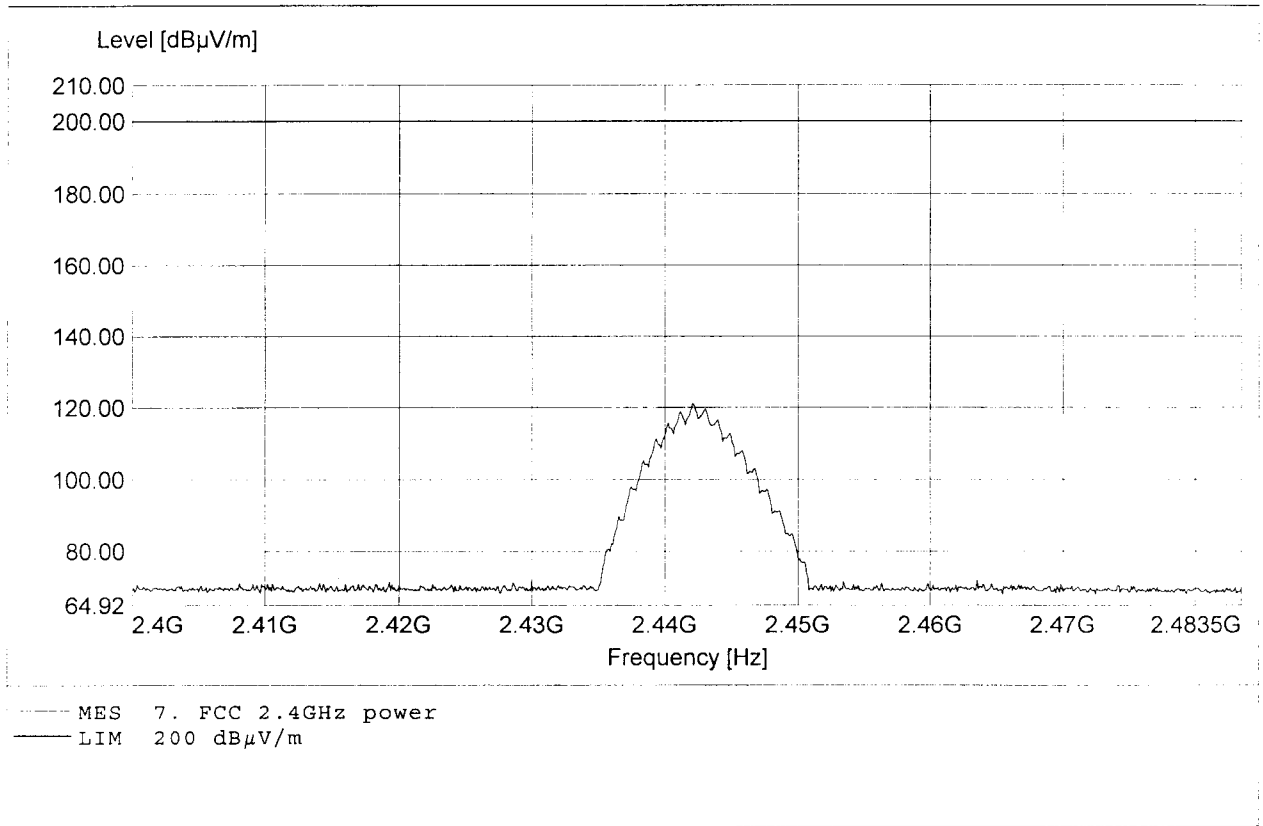

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT/Model : 2.4 GHz Cordless Headset / Ellipse 2G4 / Ch.:0


Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V-15% AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2401,12MHz Pmax:23,99dBm RBW:4MHz

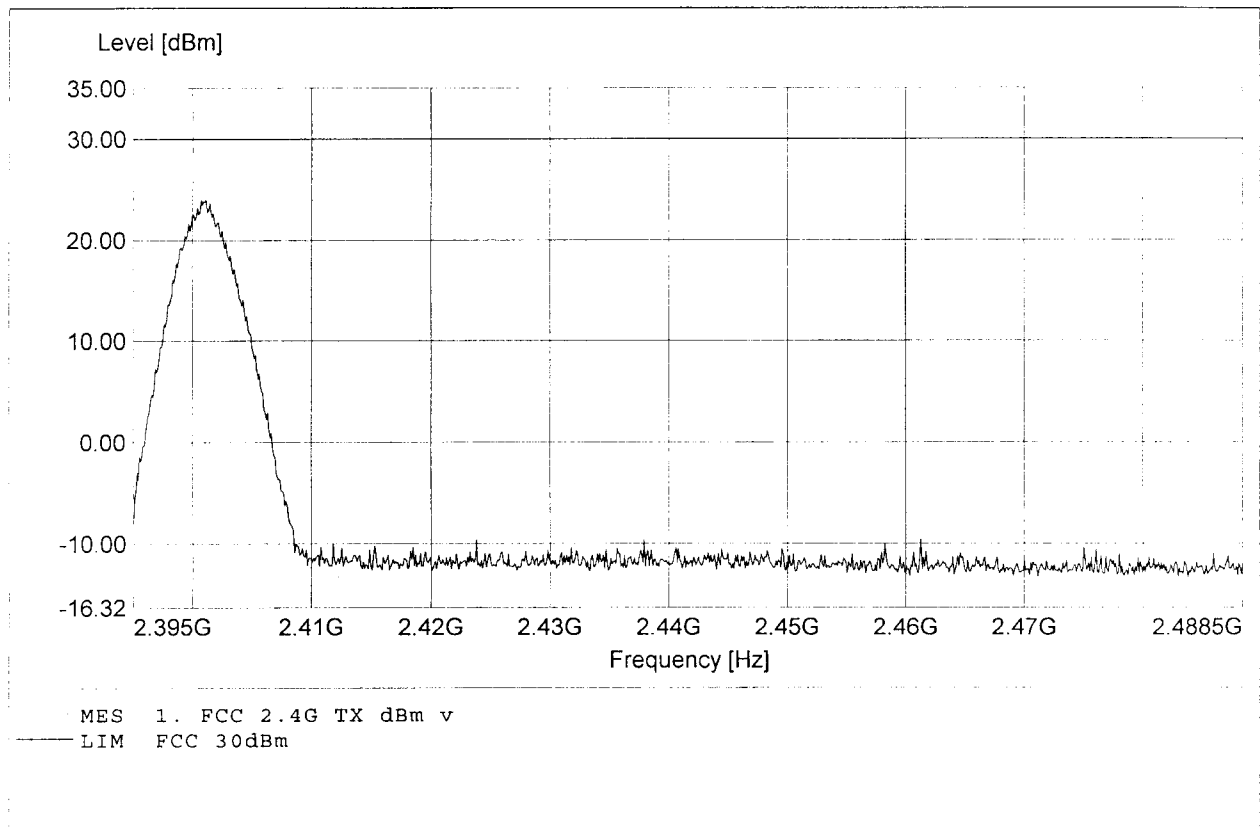

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT/Model : 2.4 GHz Cordless Headset / Ellipse 2G4 / Ch.:0


Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V-15% AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2400,81MHz Pmax:24,37dBm RBW:4MHz

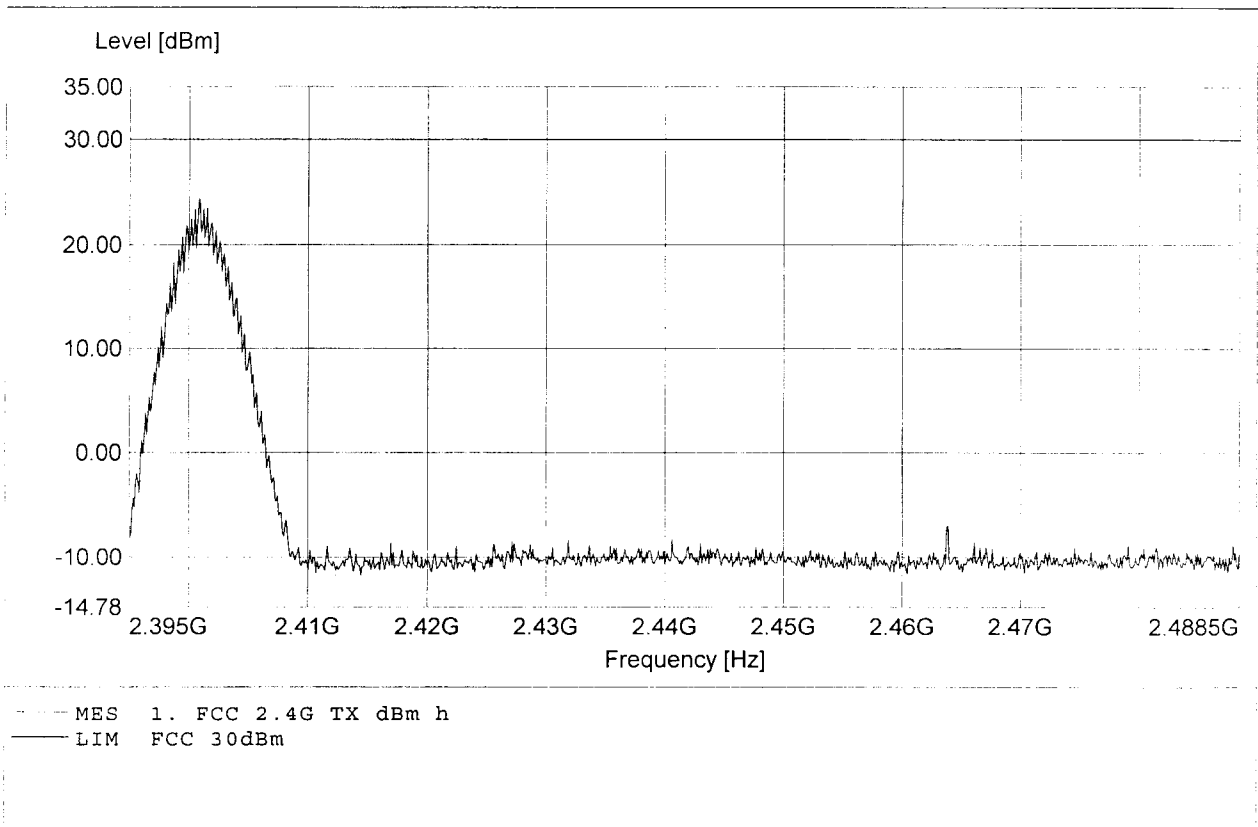

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT/Model : 2.4 GHz Cordless Headset / Ellipse 2G4 / Ch.:40


Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V-15% AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2442,16MHz Pmax:25,19dBm RBW:4MHz

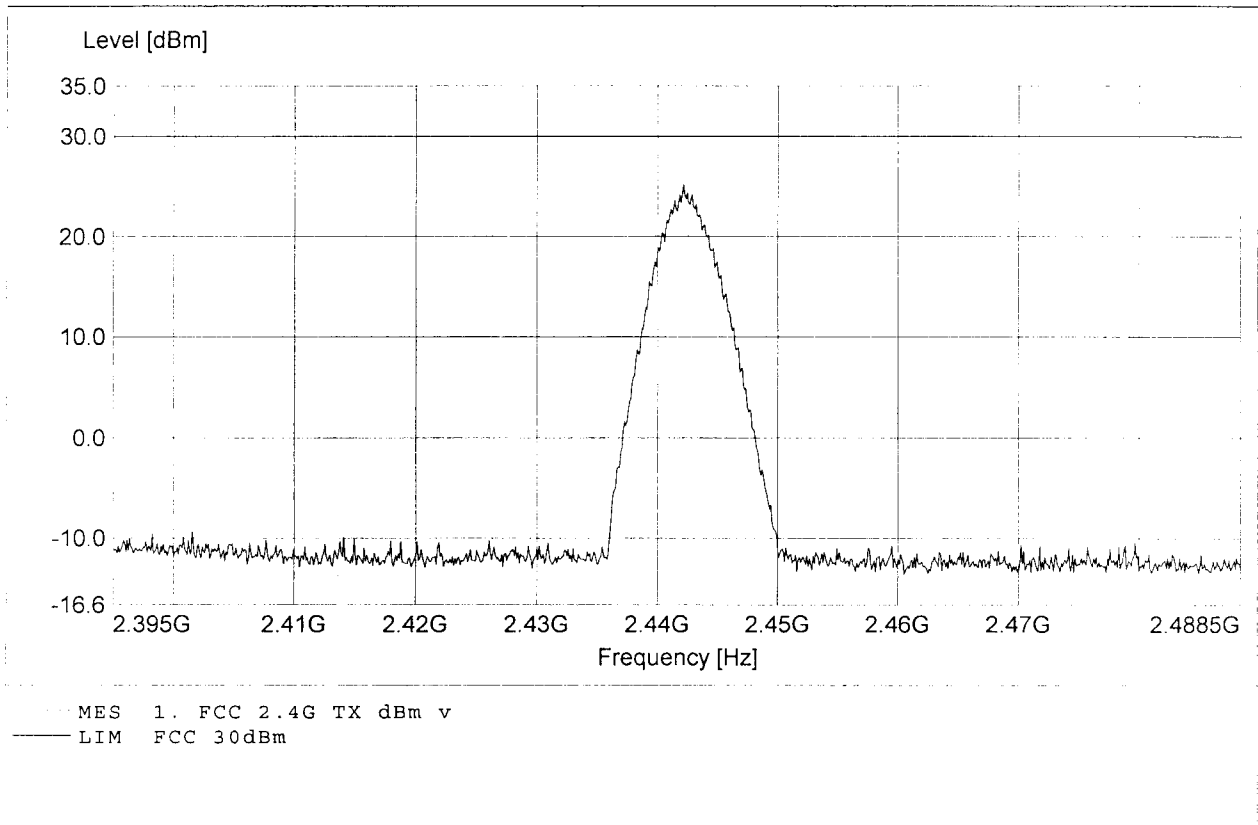

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT/Model : 2.4 GHz Cordless Headset / Ellipse 2G4 / Ch.:40


Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V-15% AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2442,26MHz Pmax:23,53dBm RBW:4MHz

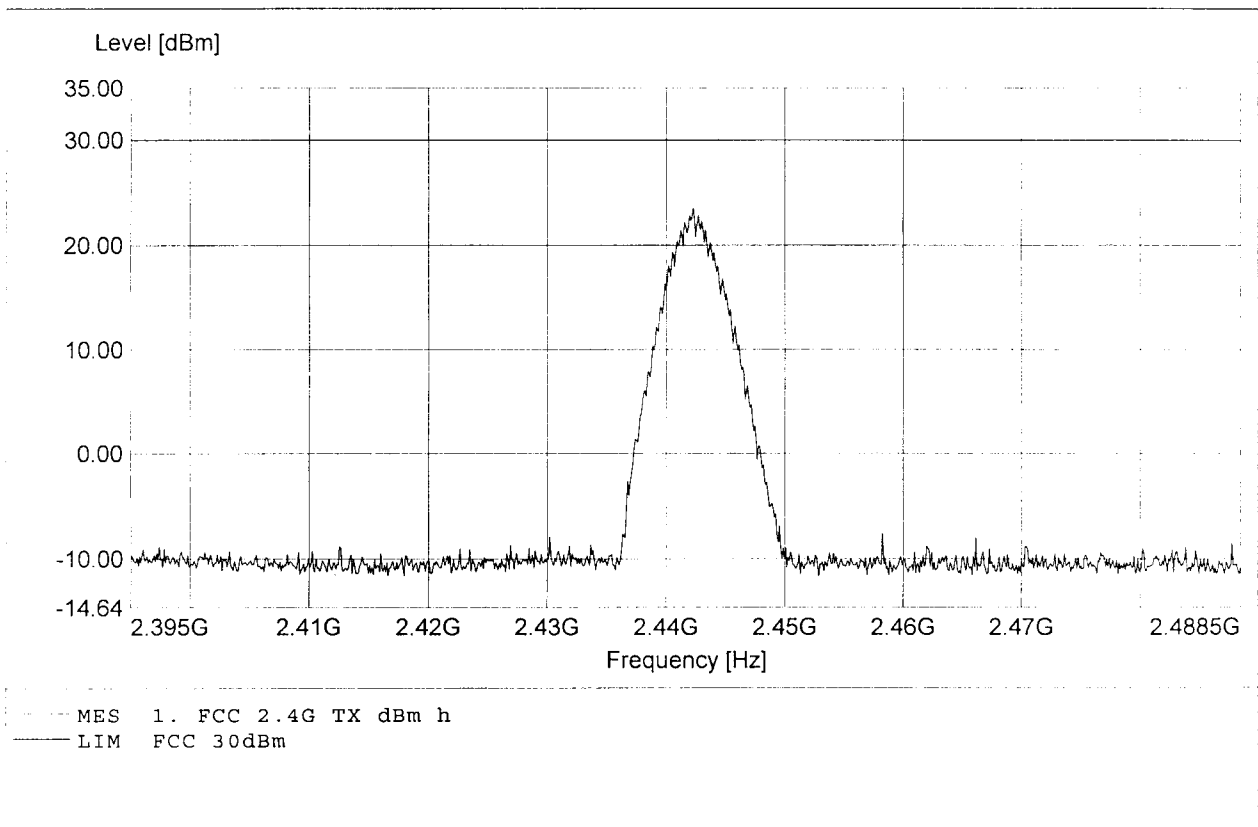

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT/Model : 2.4 GHz Cordless Headset / Ellipse 2G4 / Ch.:78


Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V-15% AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2481,43MHz Pmax:24,72dBm RBW:4MHz

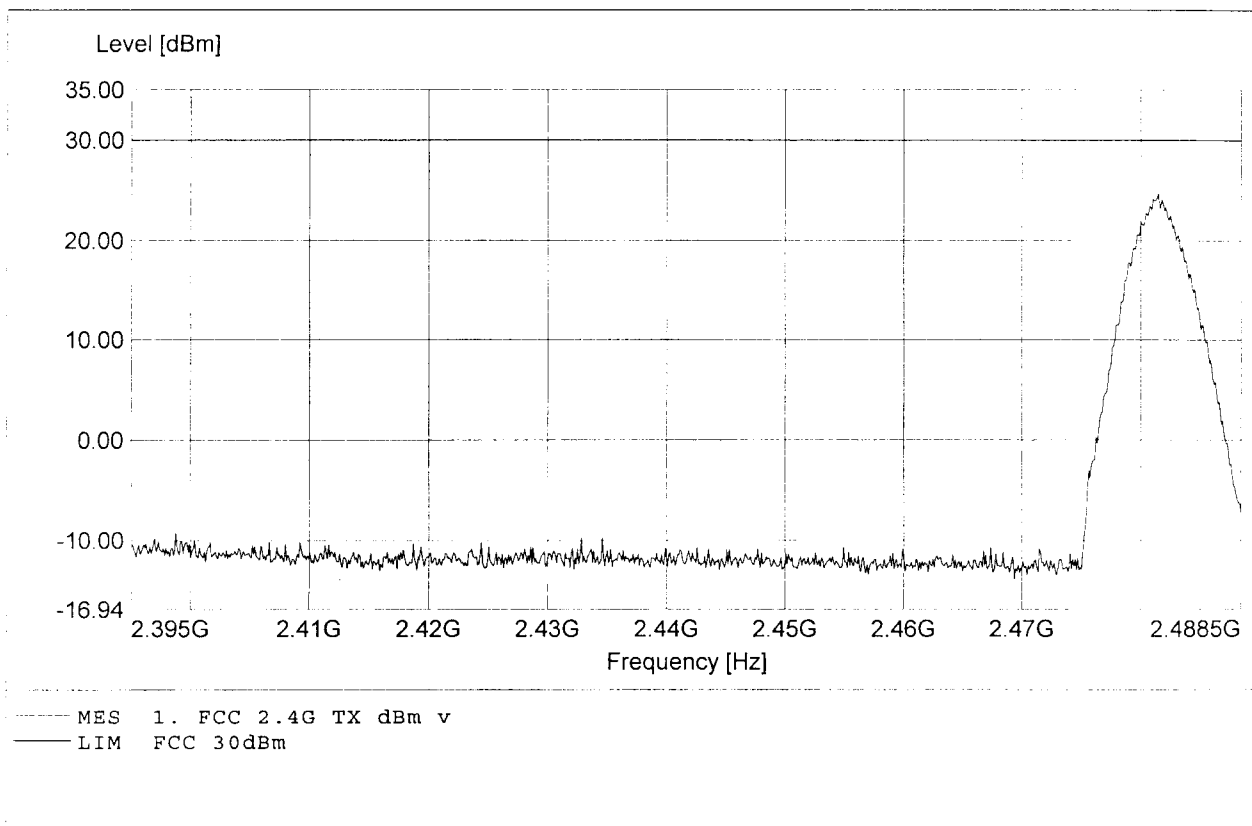

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT/Model : 2.4 GHz Cordless Headset / Ellipse 2G4 / Ch.:78


Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V-15% AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2481,12MHz Pmax:23,77dBm RBW:4MHz

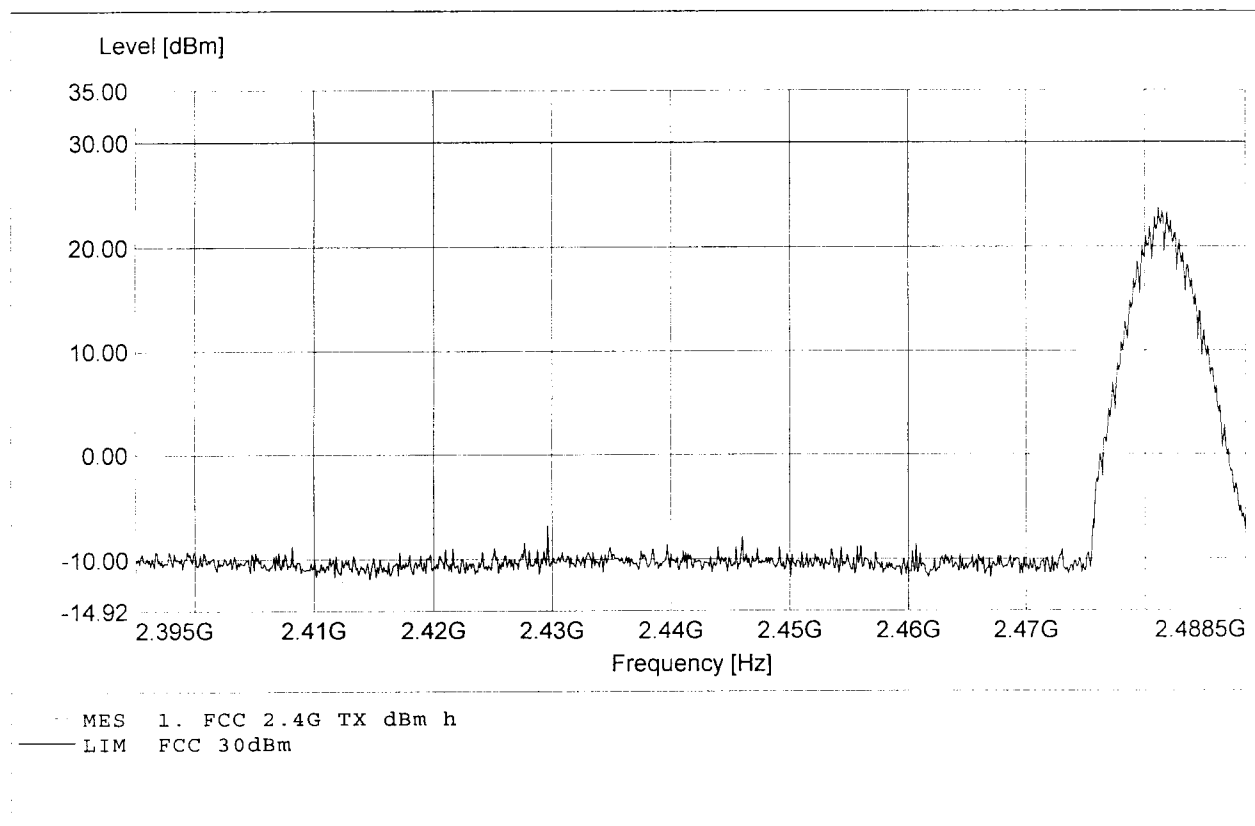

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT/Model : 2.4 GHz Cordless Headset / Ellipse 2G4 / Ch.:0


Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V+15% AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2400,92MHz Pmax:24,41dBm RBW:4MHz

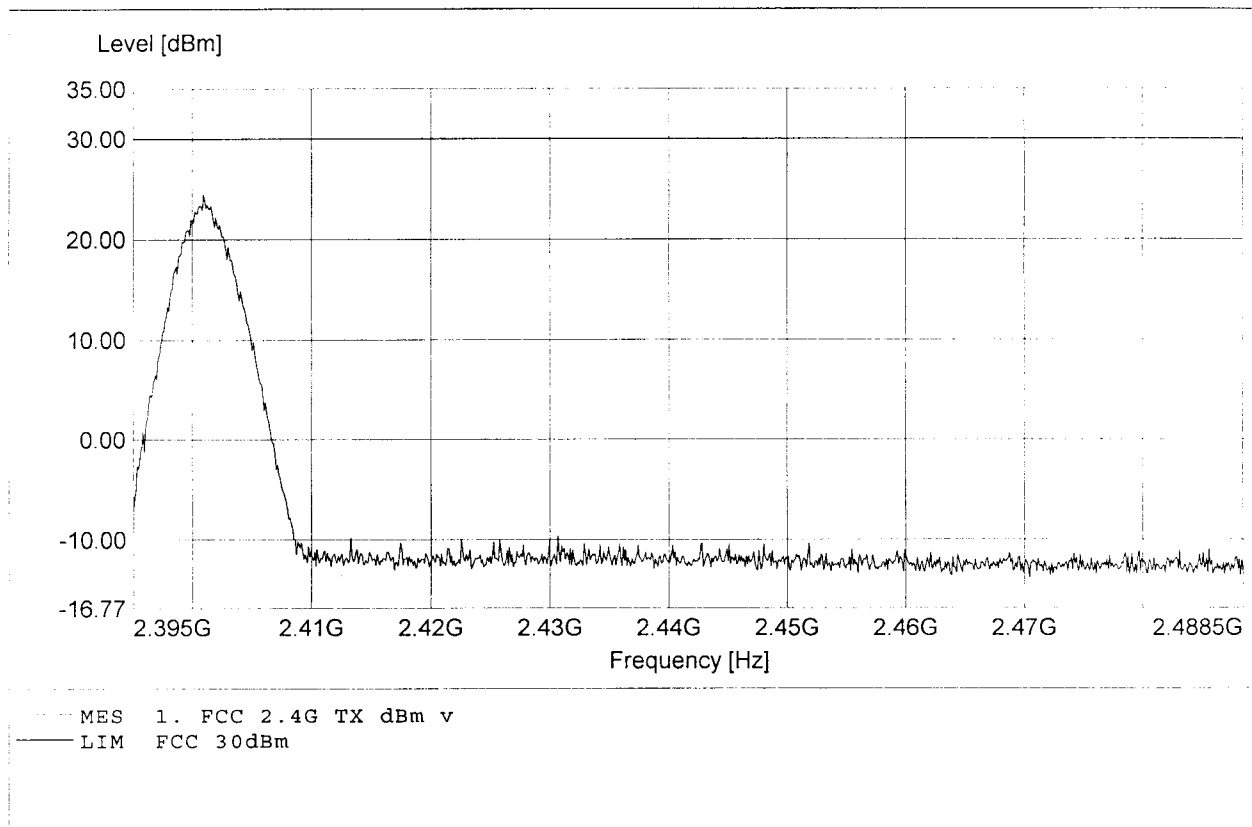

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT/Model : 2.4 GHz Cordless Headset / Ellipse 2G4 / Ch.:0


Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V+15% AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2400,92MHz Pmax:24,34dBm RBW:4MHz

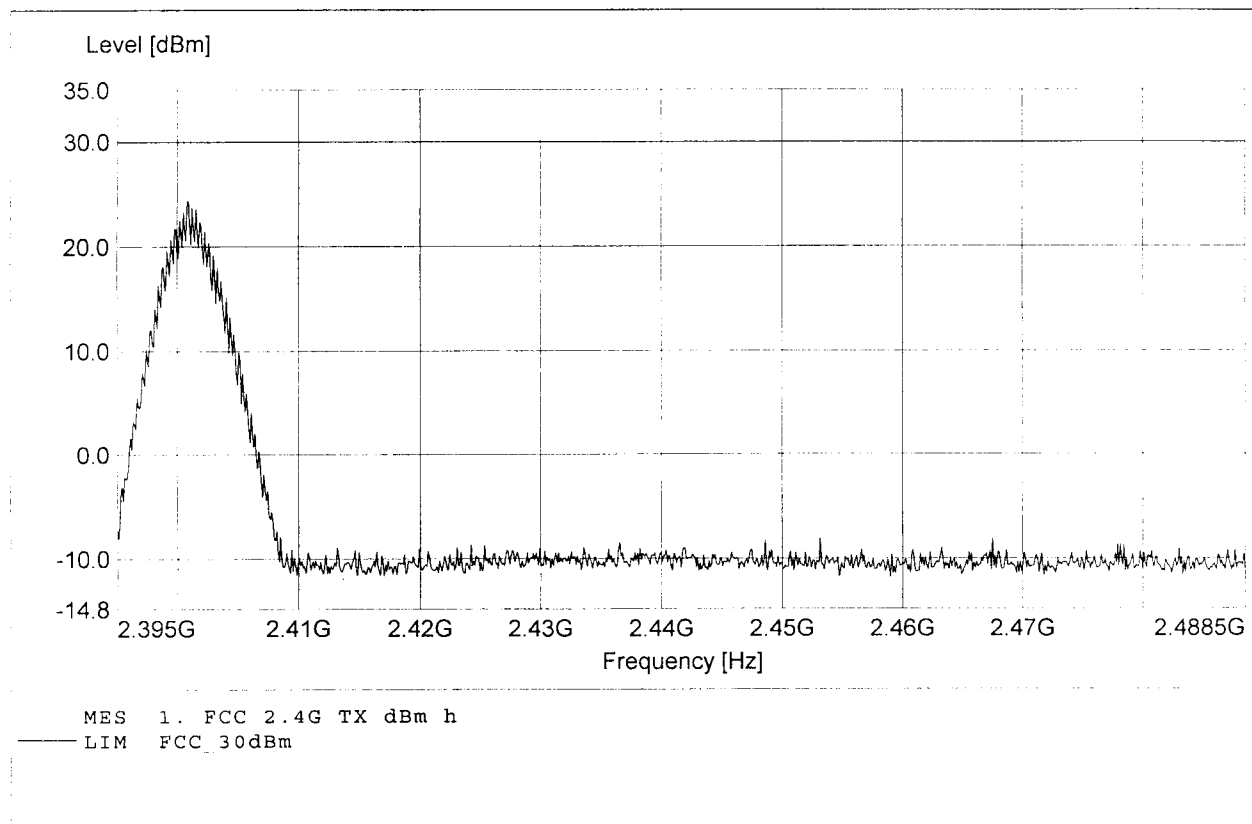

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT/Model : 2.4 GHz Cordless Headset / Ellipse 2G4 / Ch.:40


Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V+15% AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2442,16MHz Pmax:25,01dBm RBW:4MHz

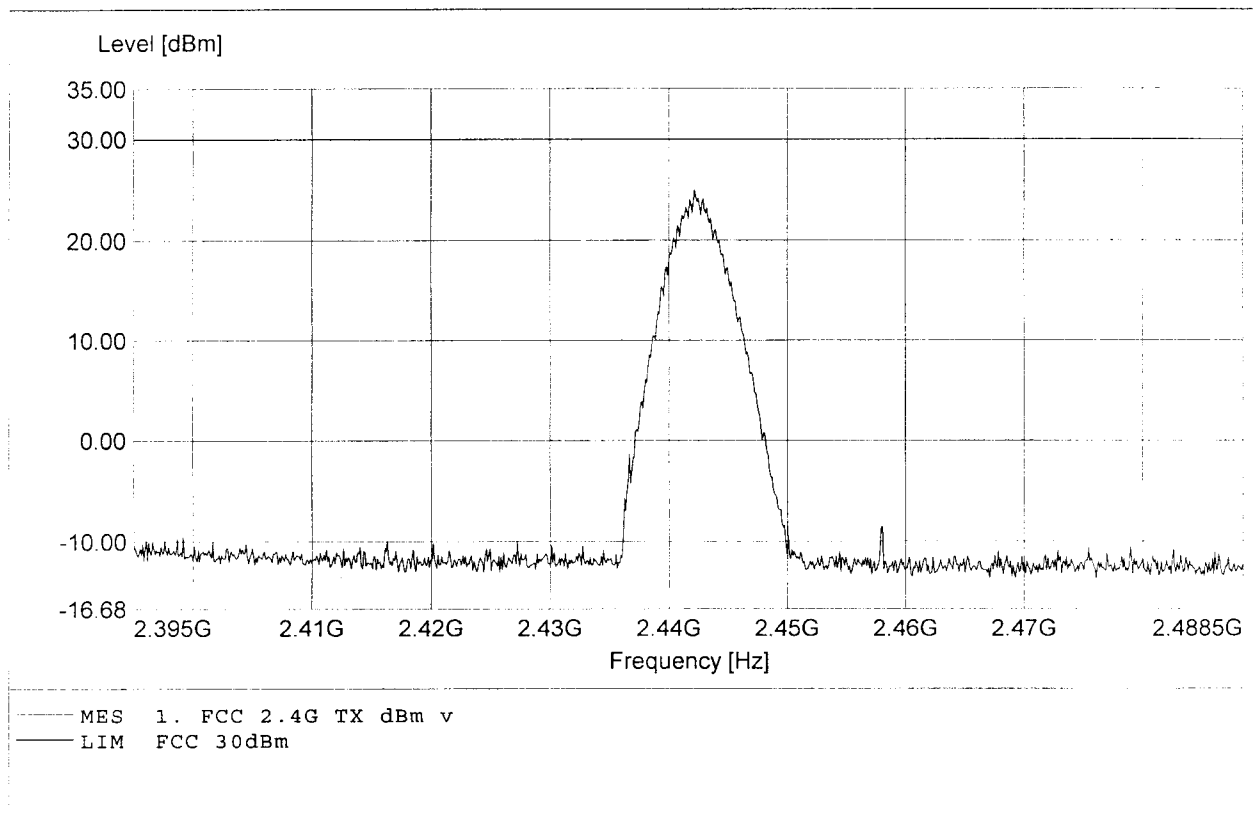

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT/Model : 2.4 GHz Cordless Headset / Ellipse 2G4 / Ch.:40


Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V+15% AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2442,26MHz Pmax:23,40dBm RBW:4MHz

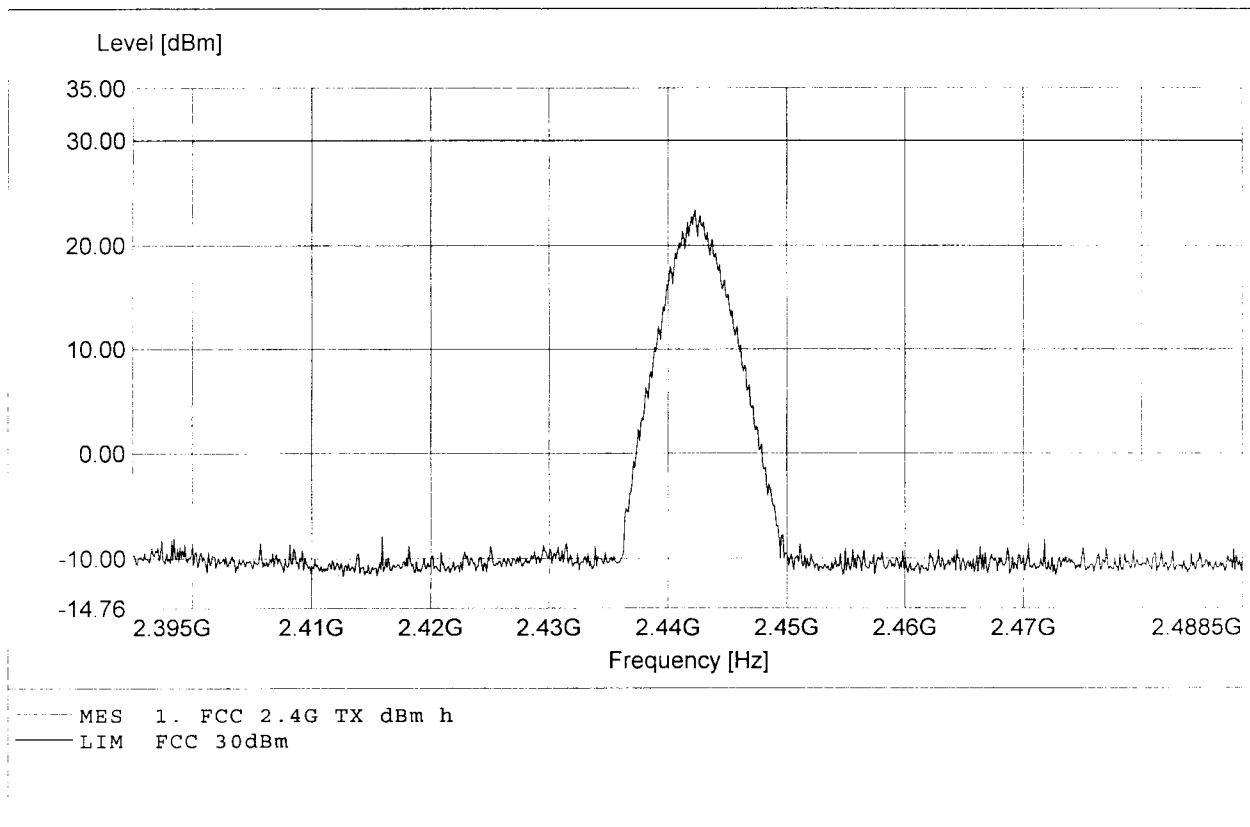

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT/Model : 2.4 GHz Cordless Headset / Ellipse 2G4 / Ch.:78


Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V+15% AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2481,33MHz Pmax:24,77dBm RBW:4MHz

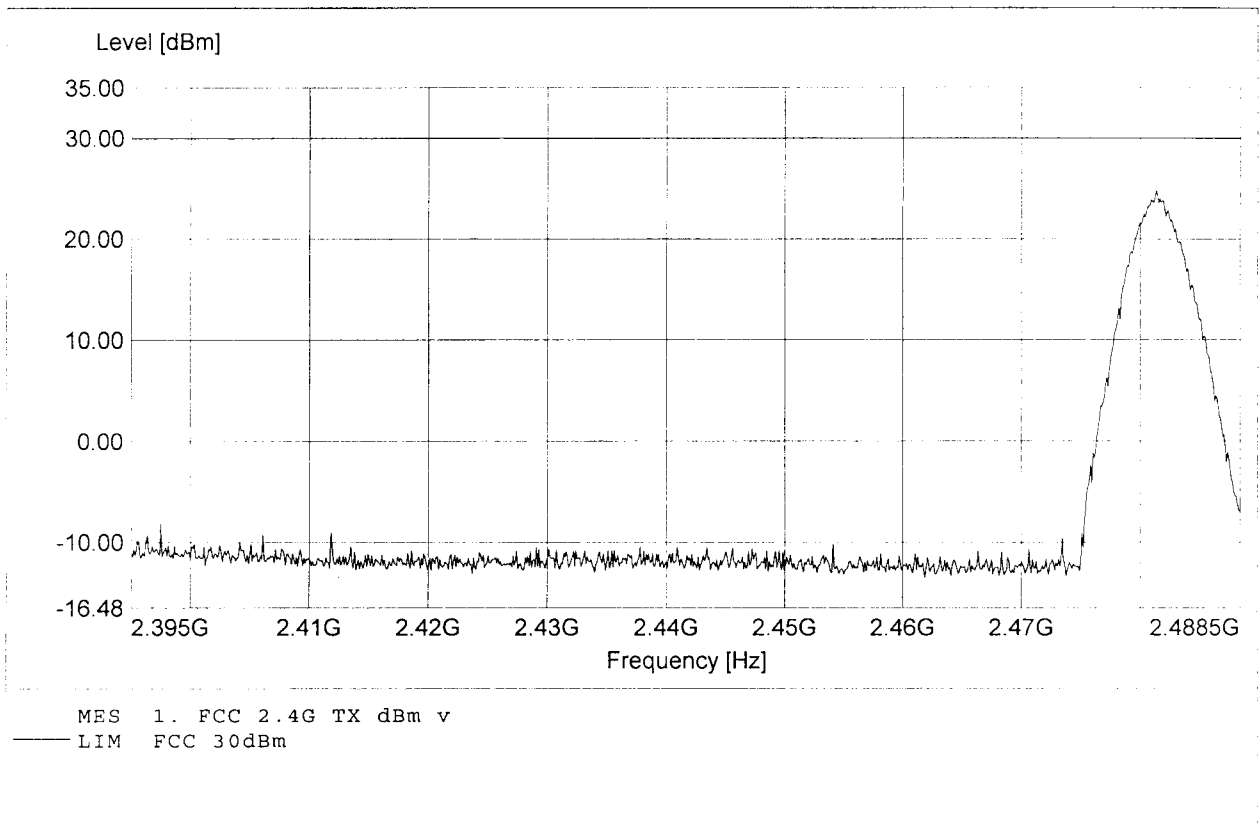

Carrier power (dBm)
FCC RULES PART 15, SUBPART C


EUT/Model : 2.4 GHz Cordless Headset / Ellipse 2G4 / Ch.:78

Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V+15% AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2481,43MHz Pmax:23,88dBm RBW:4MHz

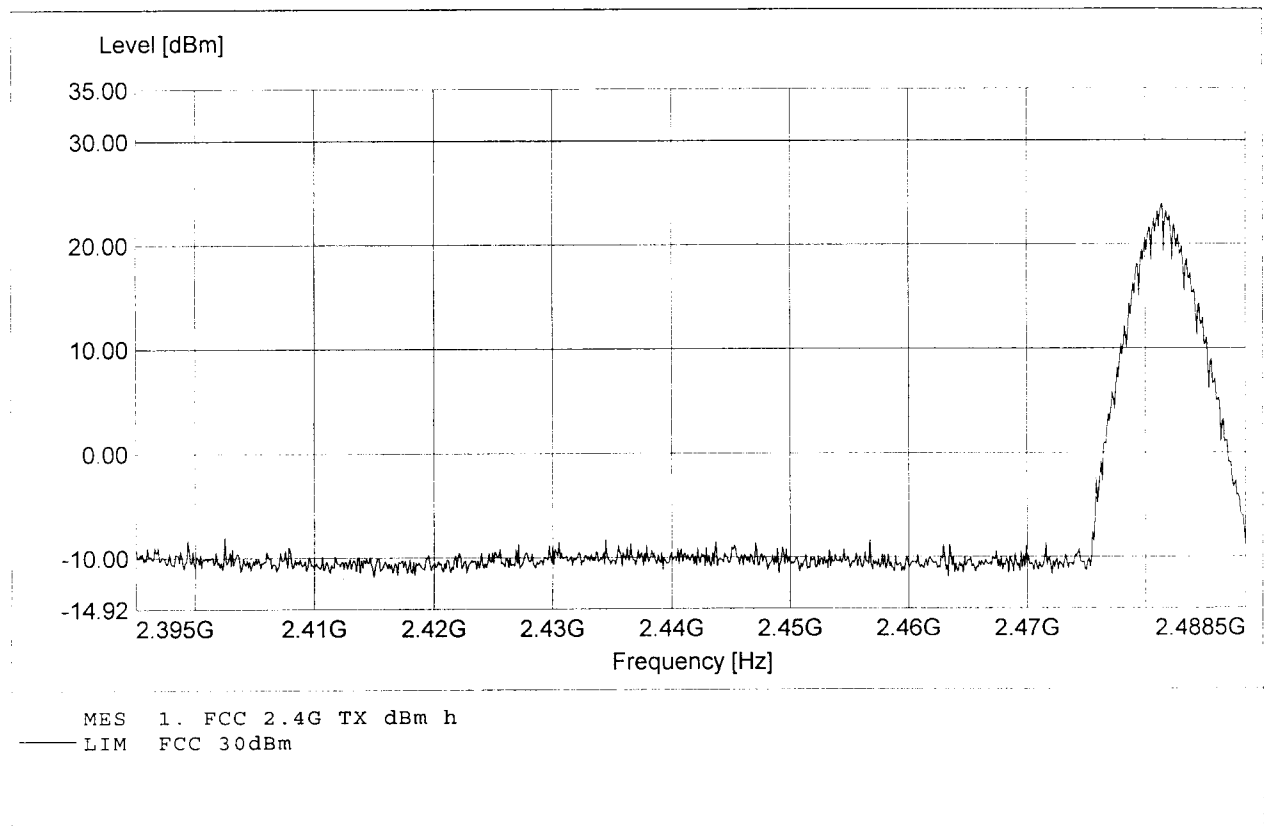


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Cordless Headset / Ant.:2 / Ch.:0
Model: Ellipse 2G4
Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2400,84MHz Pmax:19,00dBm RBW:4MHz

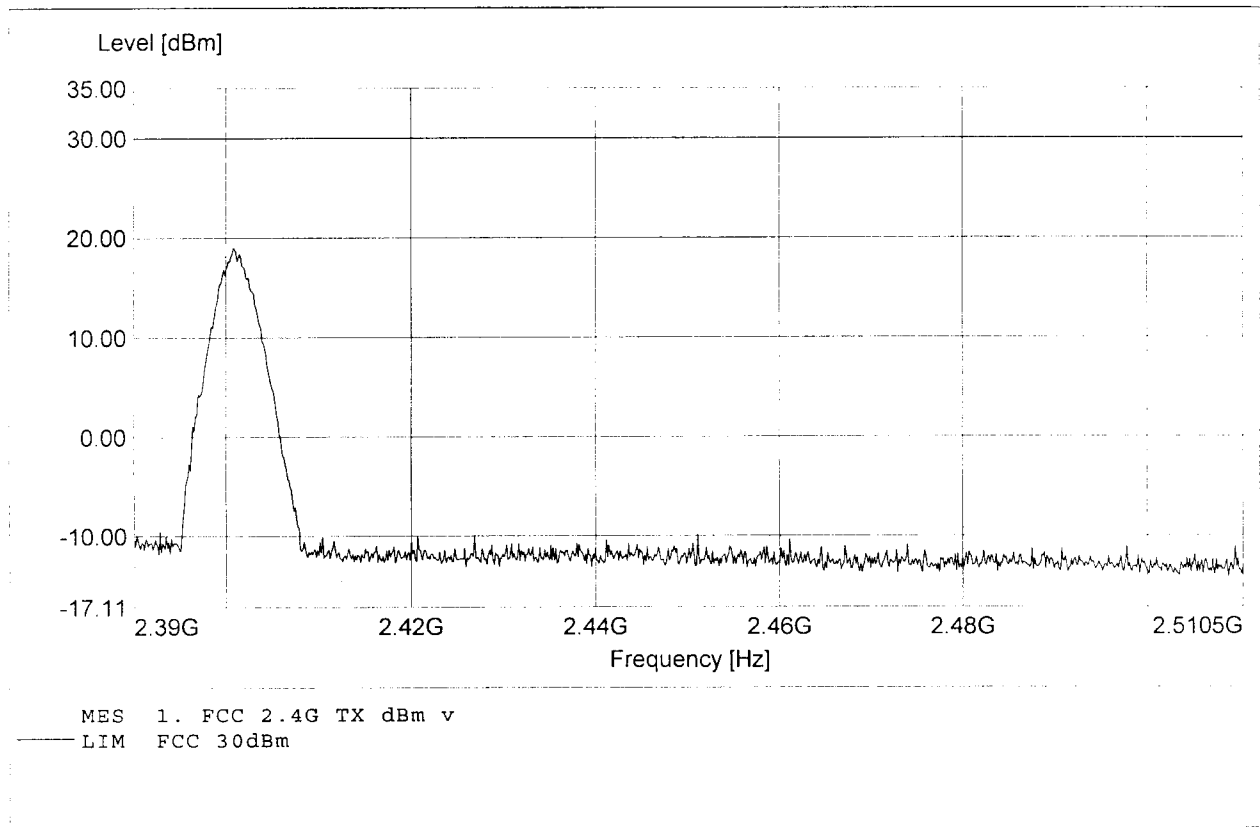


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Cordless Headset / Ant.:2 / Ch.:0
Model: Ellipse 2G4
Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2401,11MHz Pmax:14,36dBm RBW:4MHz

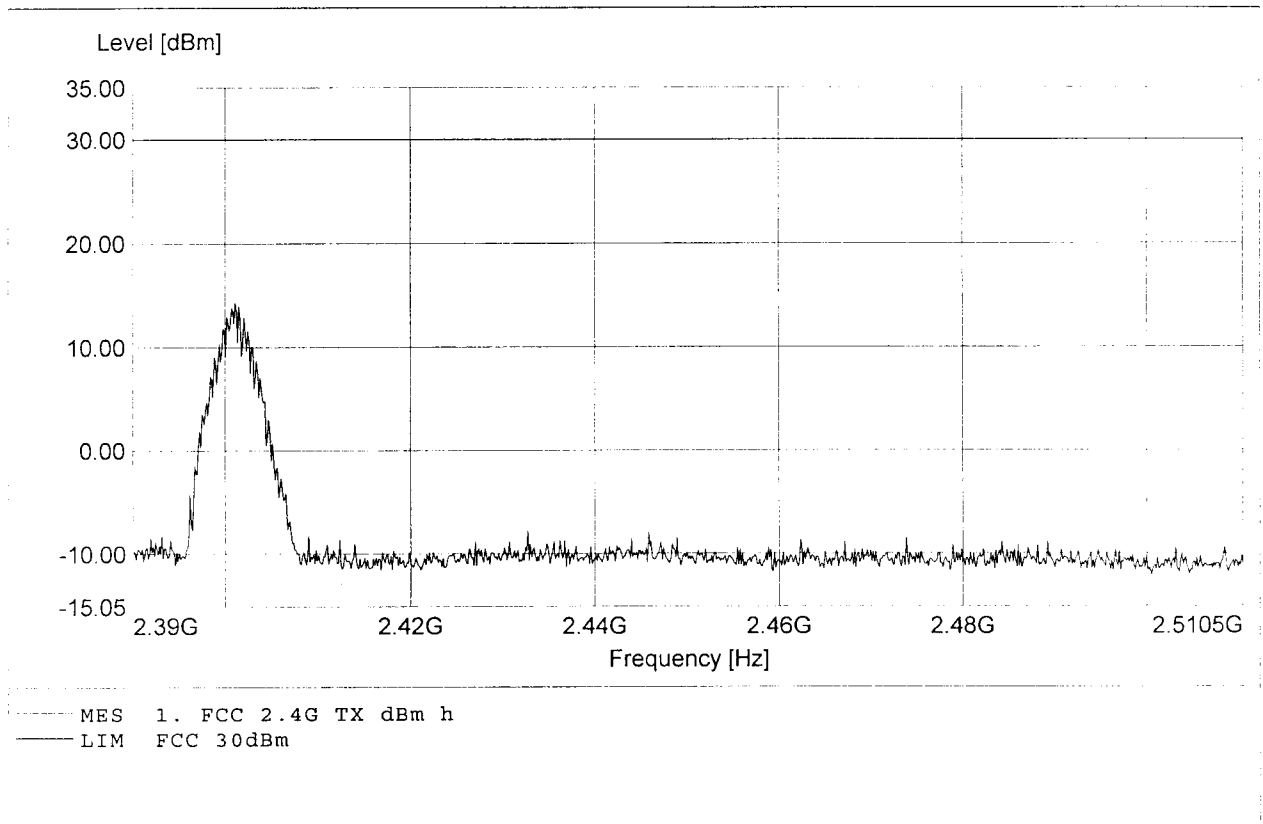


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Cordless Headset / Ant.:2 / Ch.:40
Model: Ellipse 2G4
Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2442,35MHz Pmax:20,77dBm RBW:4MHz

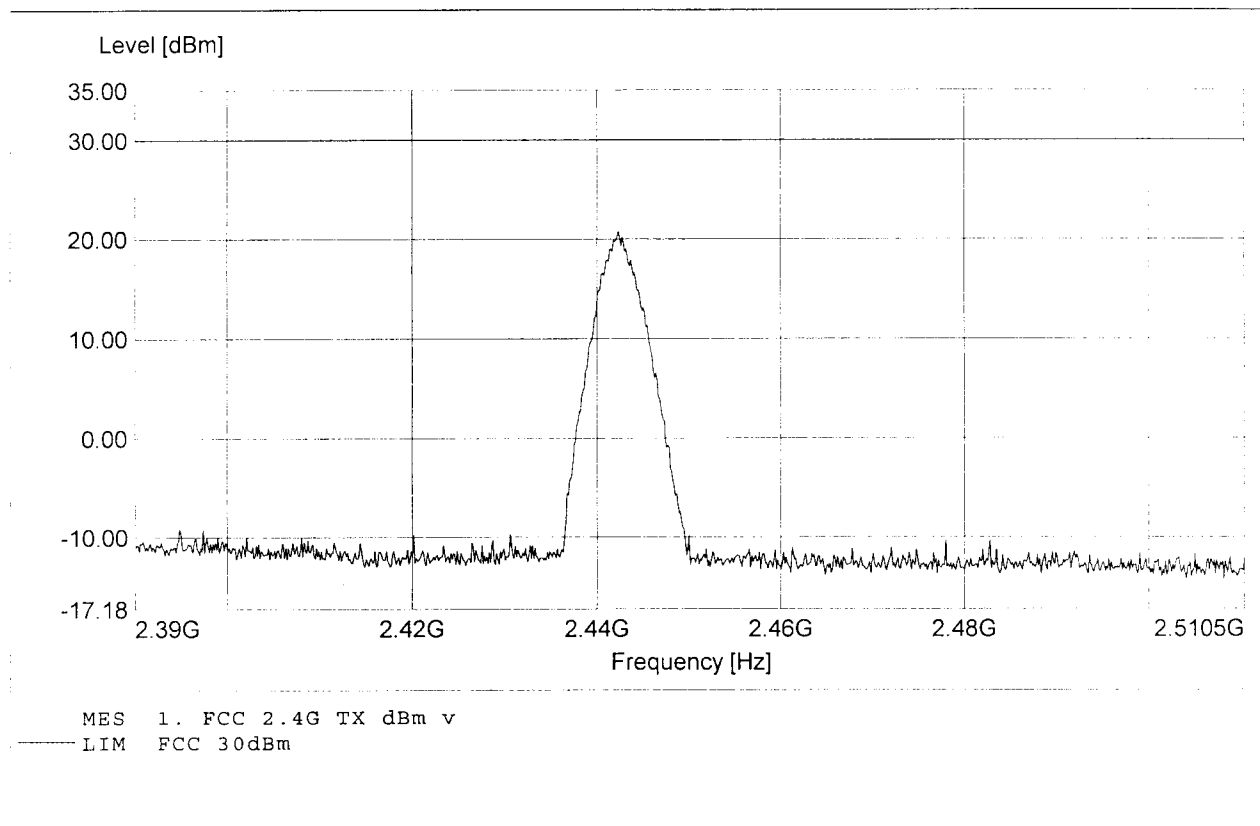


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Cordless Headset / Ant.:2 / Ch.:40
Model: Ellipse 2G4
Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2442,21MHz Pmax:17,33dBm RBW:4MHz

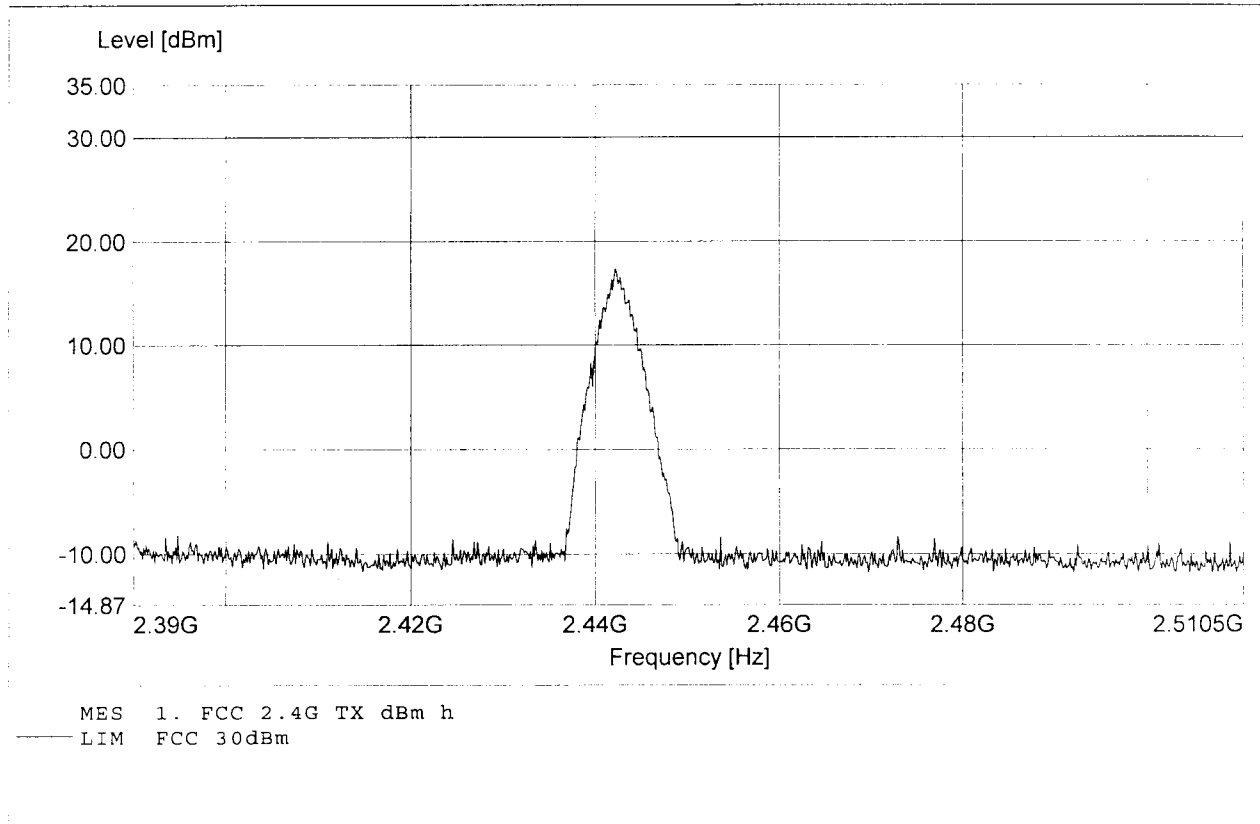


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Cordless Headset / Ant.:2 / Ch.:78
Model: Ellipse 2G4
Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2481,44MHz Pmax:22,56dBm RBW:4MHz

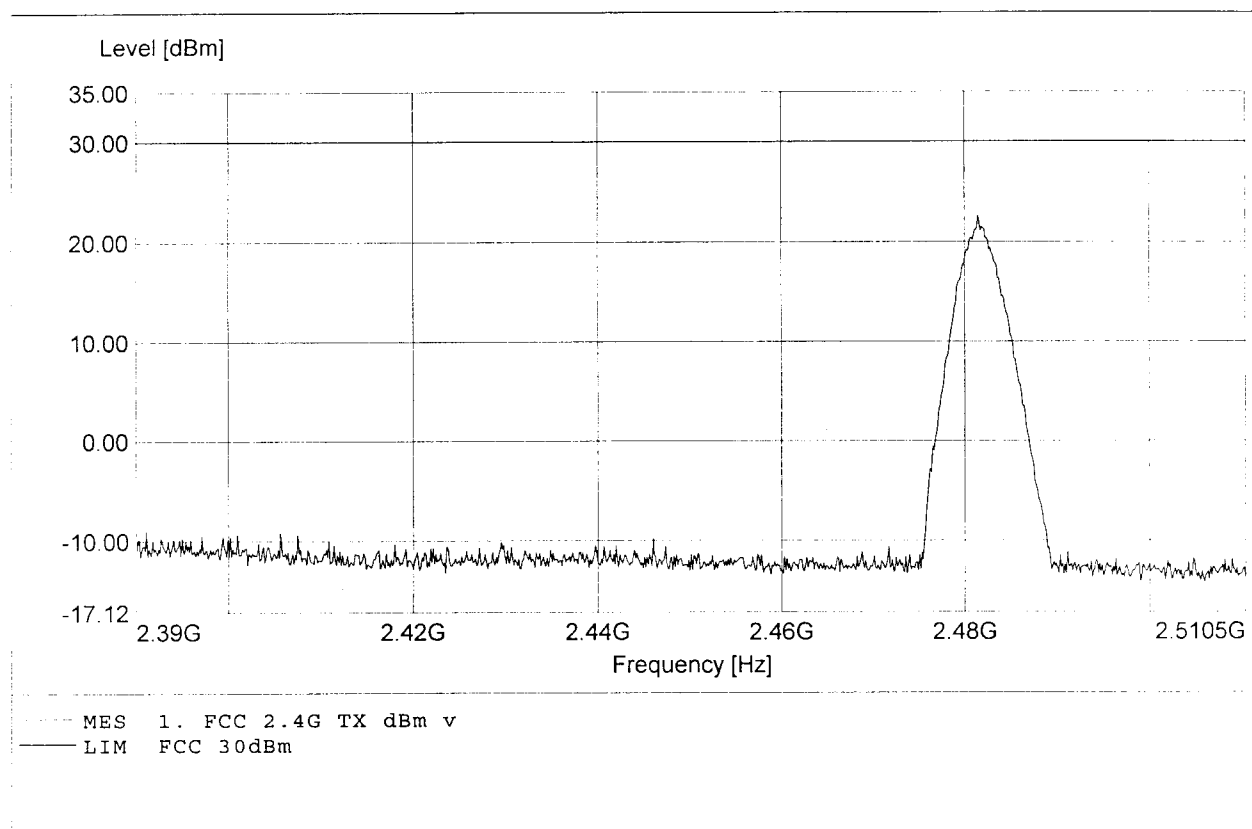


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Cordless Headset / Ant.:2 / Ch.:78
Model: Ellipse 2G4
Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2481,44MHz Pmax:19,51dBm RBW:4MHz

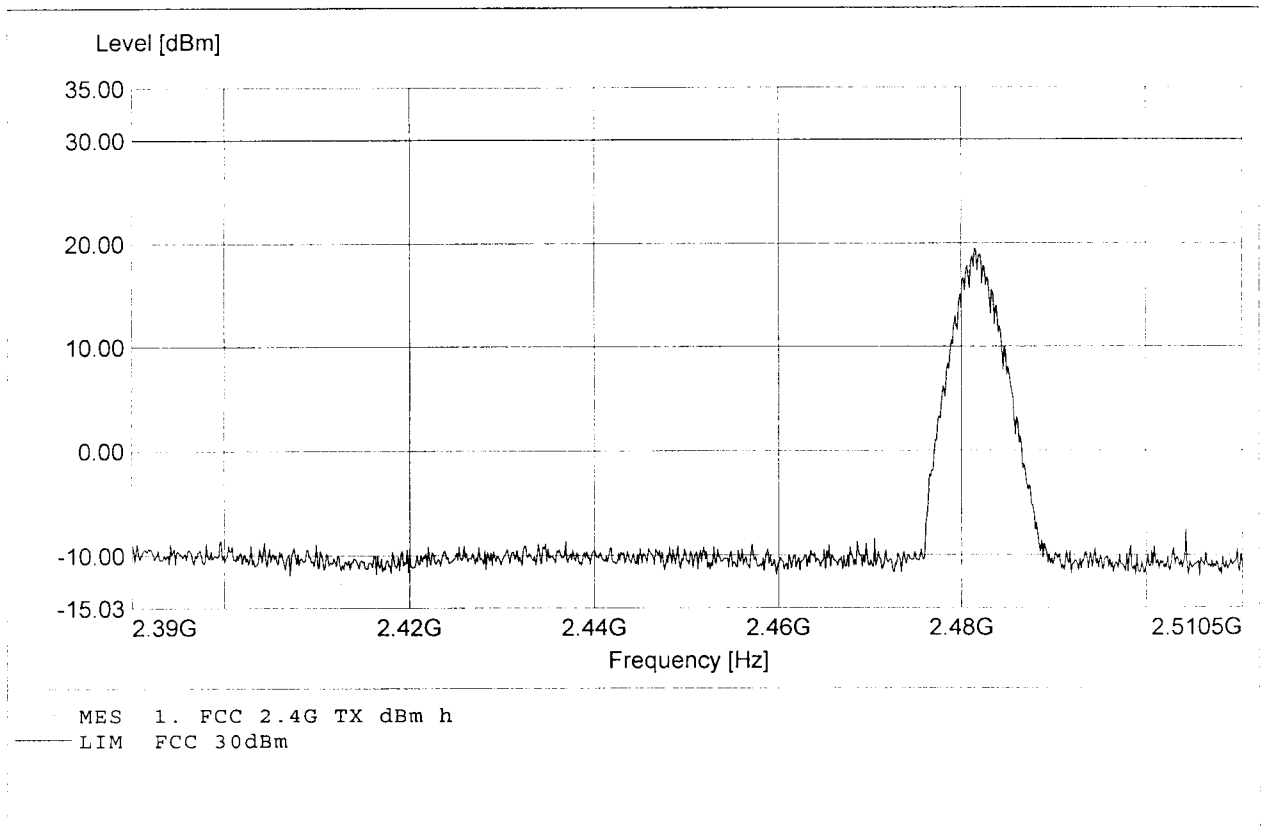


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Cordless Headset / Ant.:2 / Ch.:78
Model: Ellipse 2G4
Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2482,00MHz Pmax:116,37dBμV/m RBW=100KHz

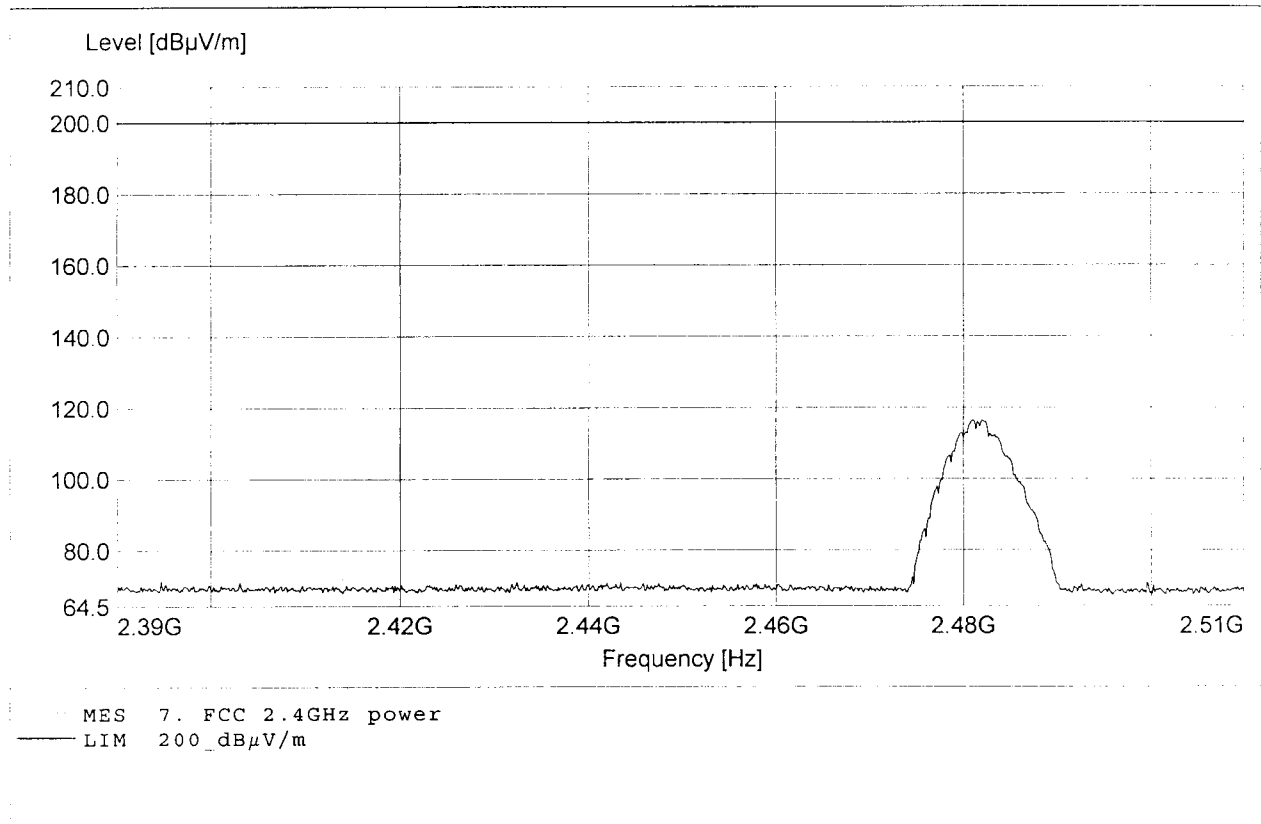


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Cordless Headset / Ant.:2 / Ch.:0
Model: Ellipse 2G4
Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V-15% AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2400,97MHz Pmax:20,72dBm RBW:4MHz

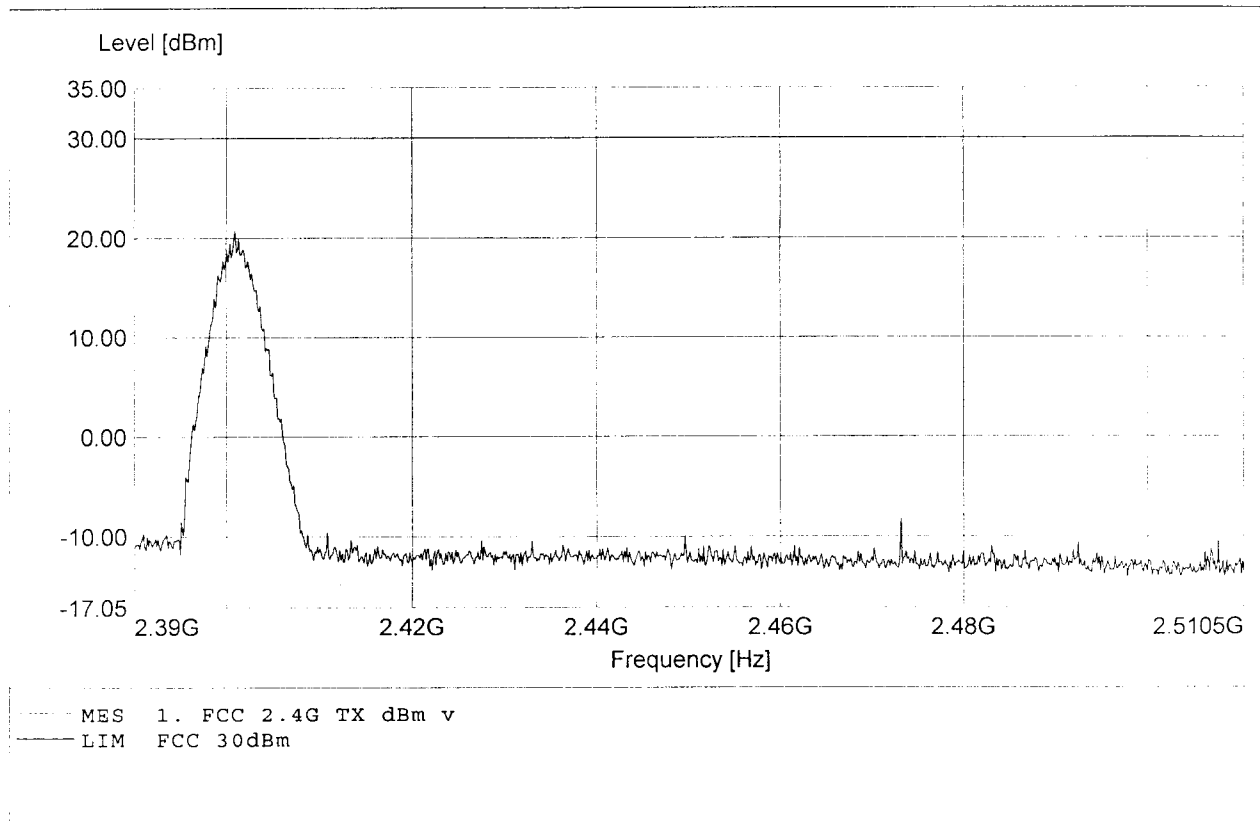


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Cordless Headset / Ant.:2 / Ch.:0
Model: Ellipse 2G4
Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V-15% AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2400,97MHz Pmax:12,86dBm RBW:4MHz

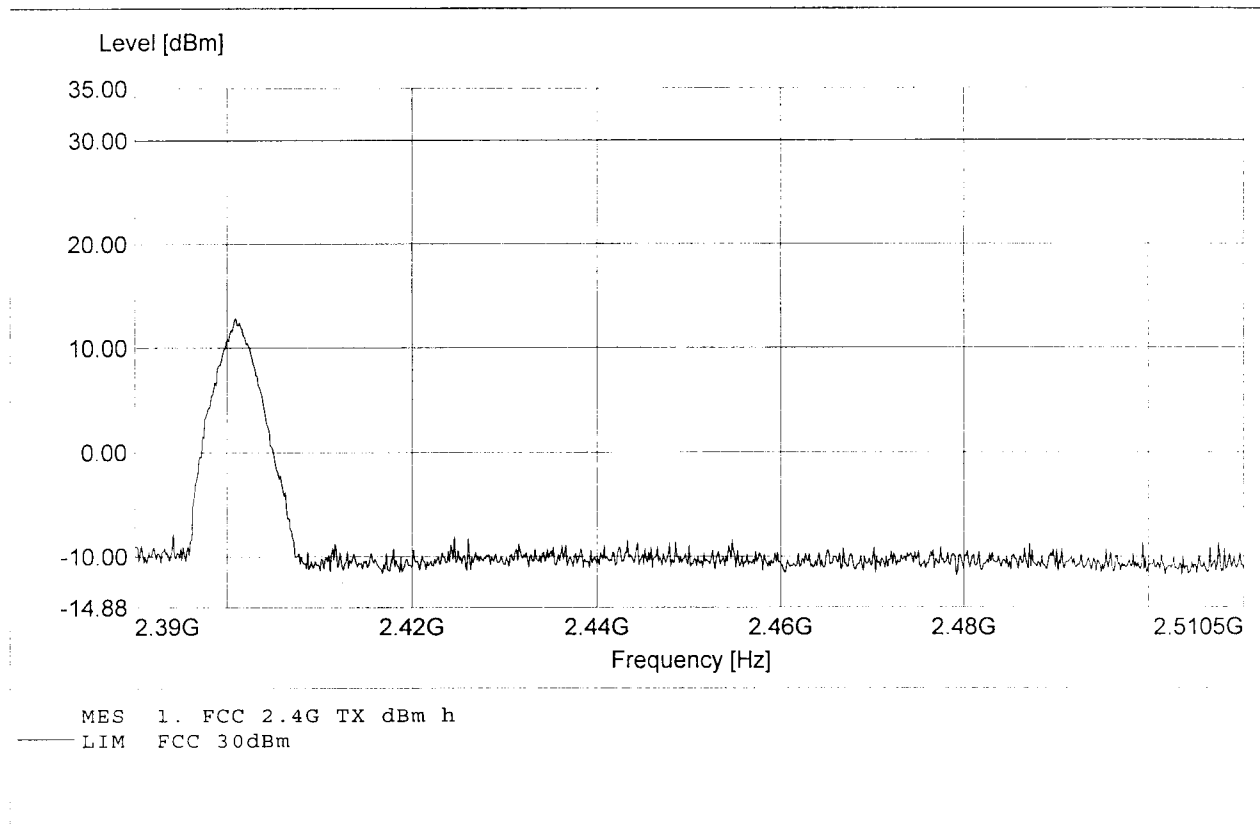


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Cordless Headset / Ant.:2 / Ch.:40
Model: Ellipse 2G4
Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V-15% AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2442,08MHz Pmax:20,92dBm RBW:4MHz

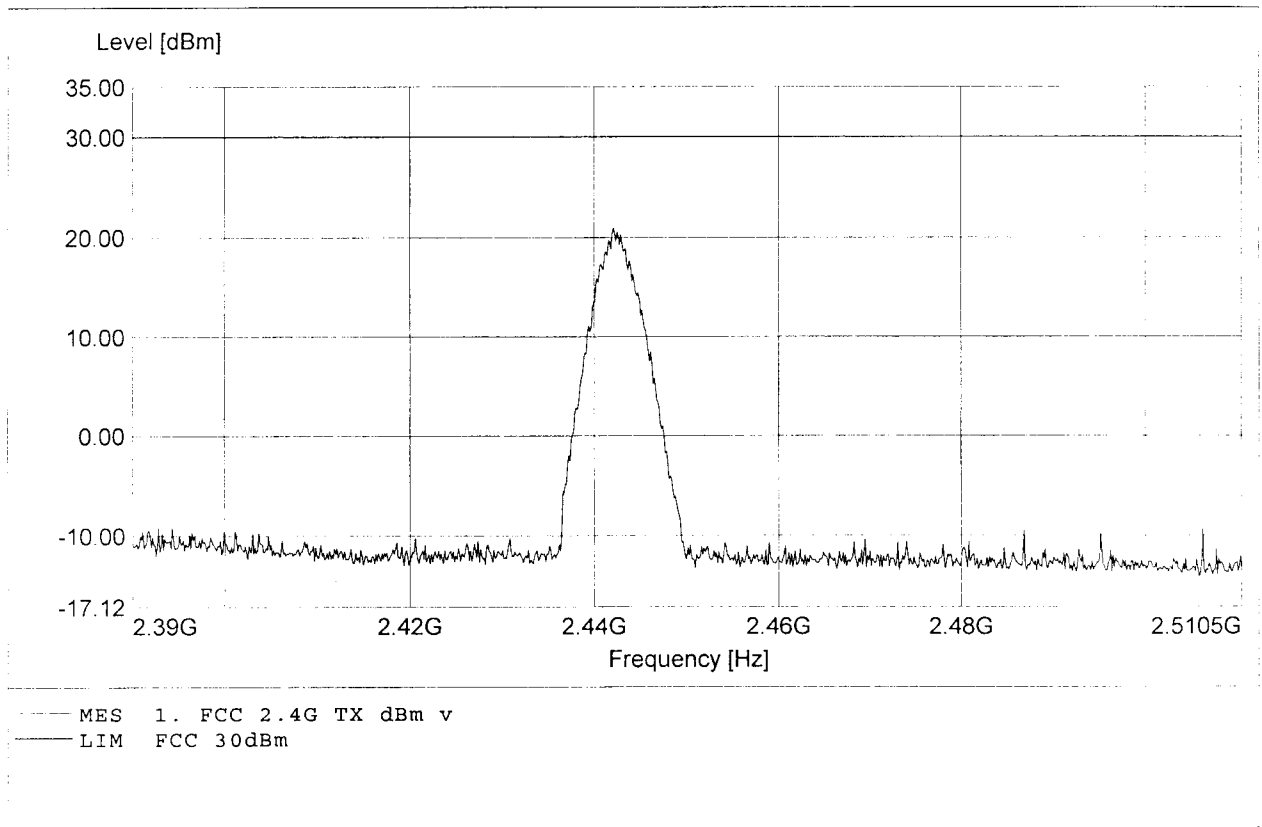


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Cordless Headset / Ant.:2 / Ch.:40
Model: Ellipse 2G4
Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V-15% AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2442,35MHz Pmax:16,70dBm RBW:4MHz

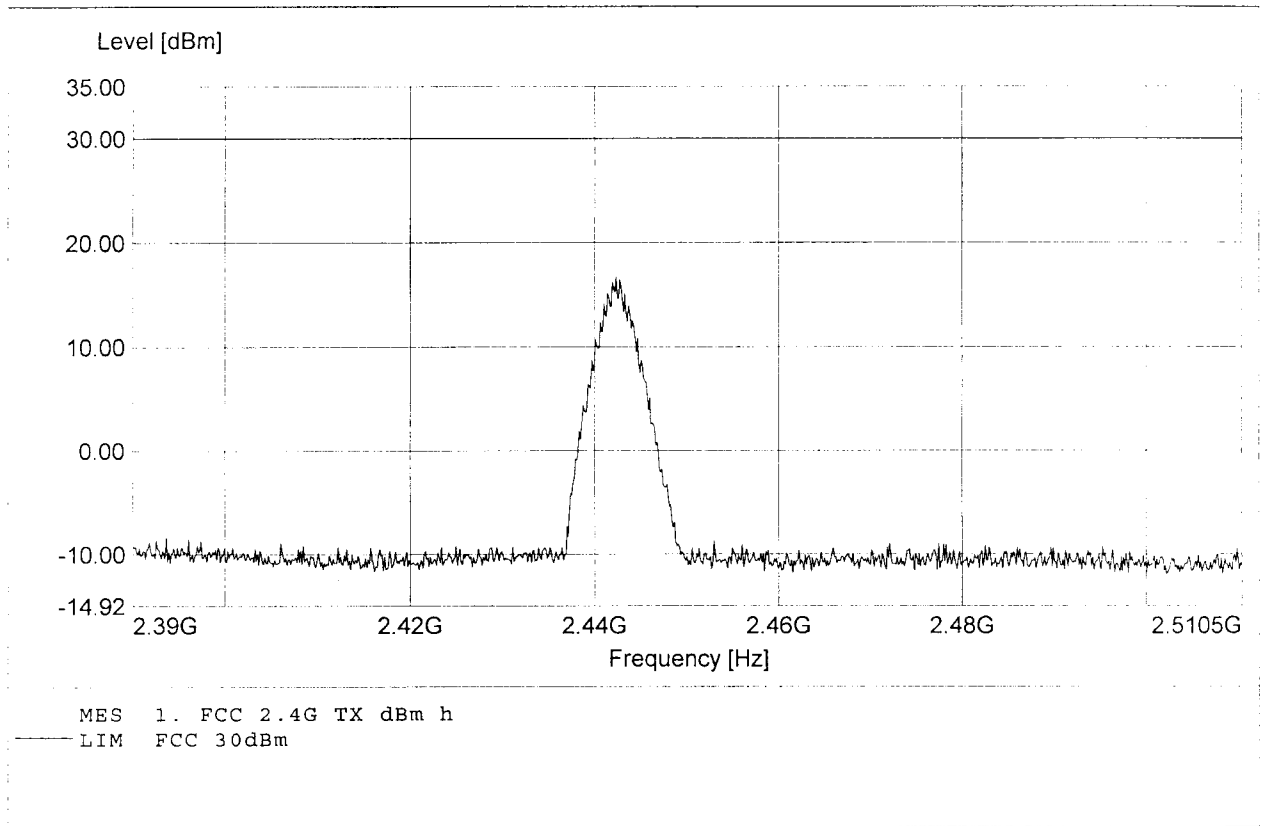


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Cordless Headset / Ant.:2 / Ch.:78
Model: Ellipse 2G4
Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V-15% AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2481,31MHz Pmax:22,11dBm RBW:4MHz

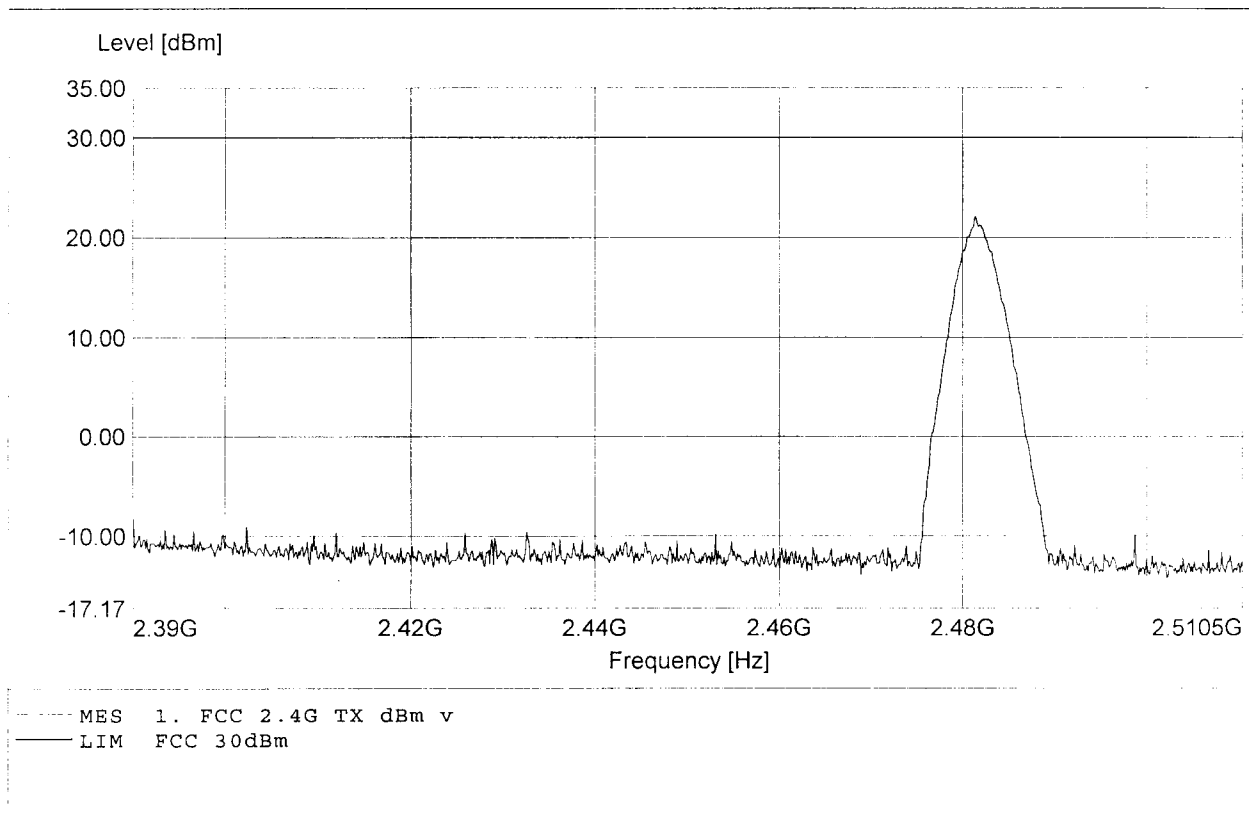


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Cordless Headset / Ant.:2 / Ch.:78
Model: Ellipse 2G4
Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V-15% AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2481,31MHz Pmax:19,46dBm RBW:4MHz

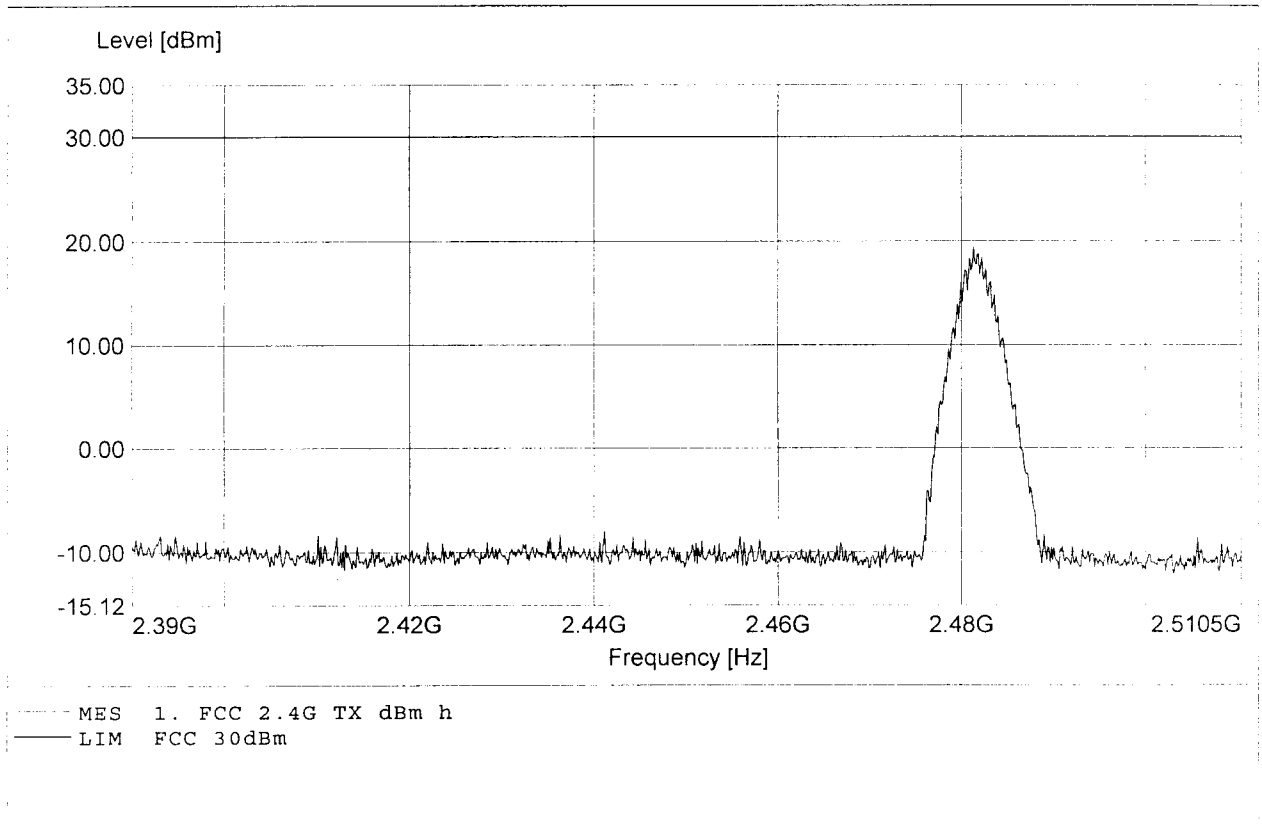


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Cordless Headset / Ant.:2 / Ch.:0
Model: Ellipse 2G4
Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V+15% AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2400,97MHz Pmax:20,57dBm RBW:4MHz

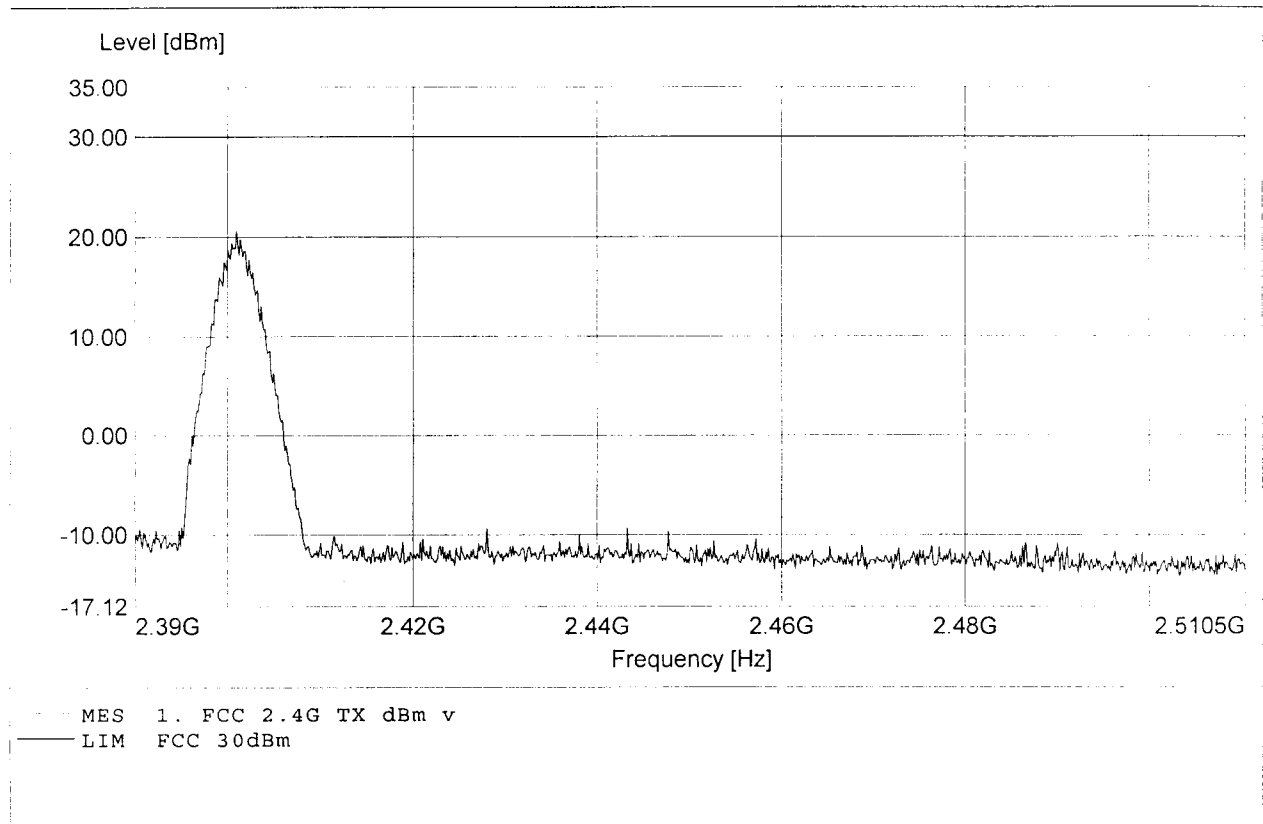


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Cordless Headset / Ant.:2 / Ch.:0
Model: Ellipse 2G4
Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V+15% AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2400,84MHz Pmax:13,40dBm RBW:4MHz

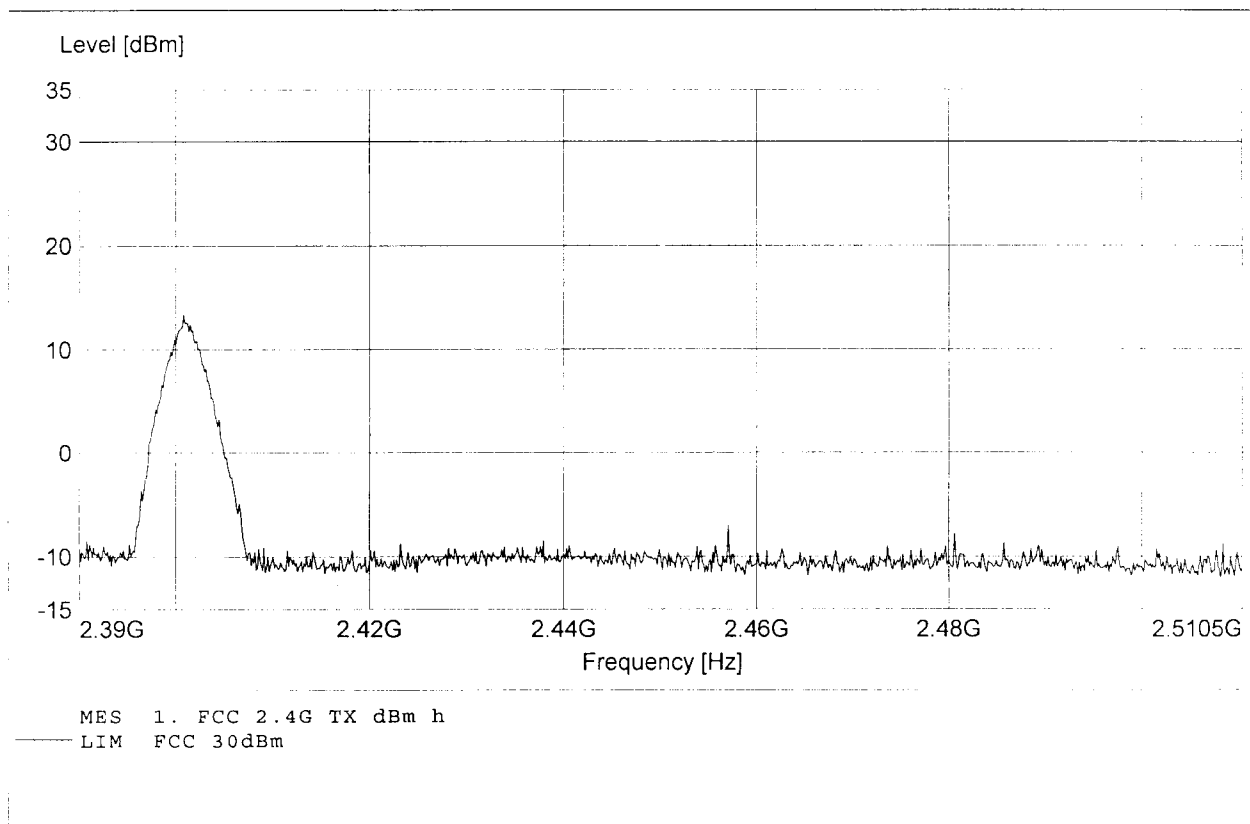


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Cordless Headset / Ant.:2 / Ch.:40
Model: Ellipse 2G4
Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V+15% AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2442,35MHz Pmax:21,22dBm RBW:4MHz

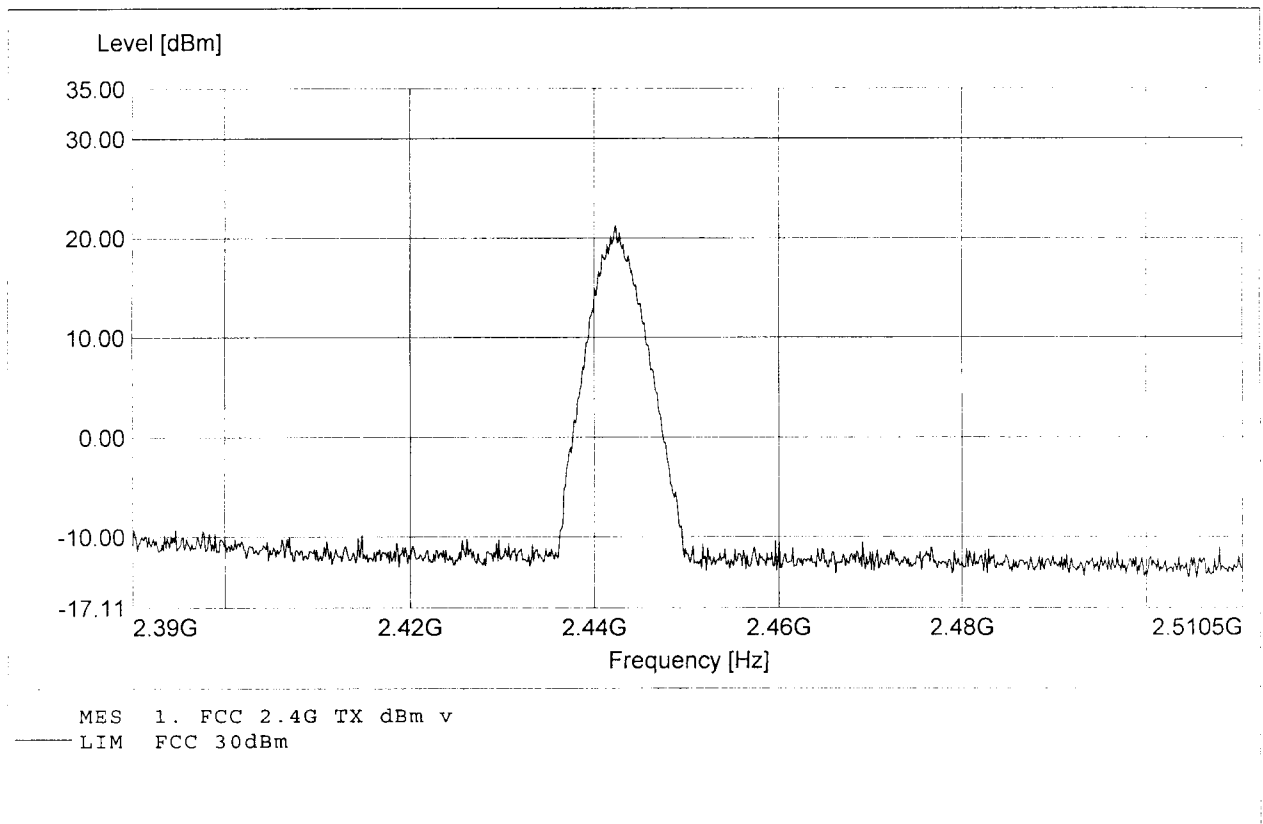


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Cordless Headset / Ant.:2 / Ch.:40
Model: Ellipse 2G4
Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V+15% AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2442,35MHz Pmax:16,77dBm RBW:4MHz

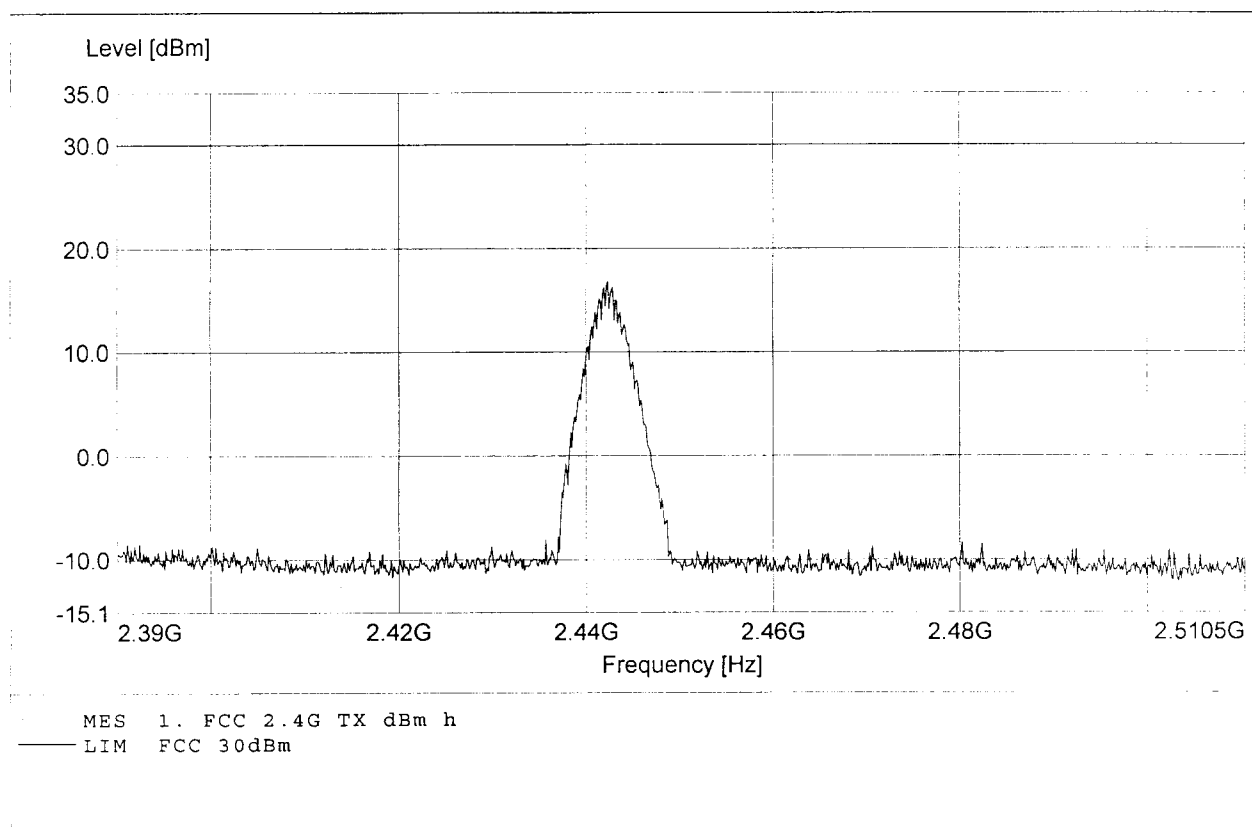


Carrier power (dBm)
FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Headset / Ant.:2 / Ch.:78
Model: Ellipse 2G4
Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V+15% AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2481,44MHz Pmax:22,26dBm RBW:4MHz

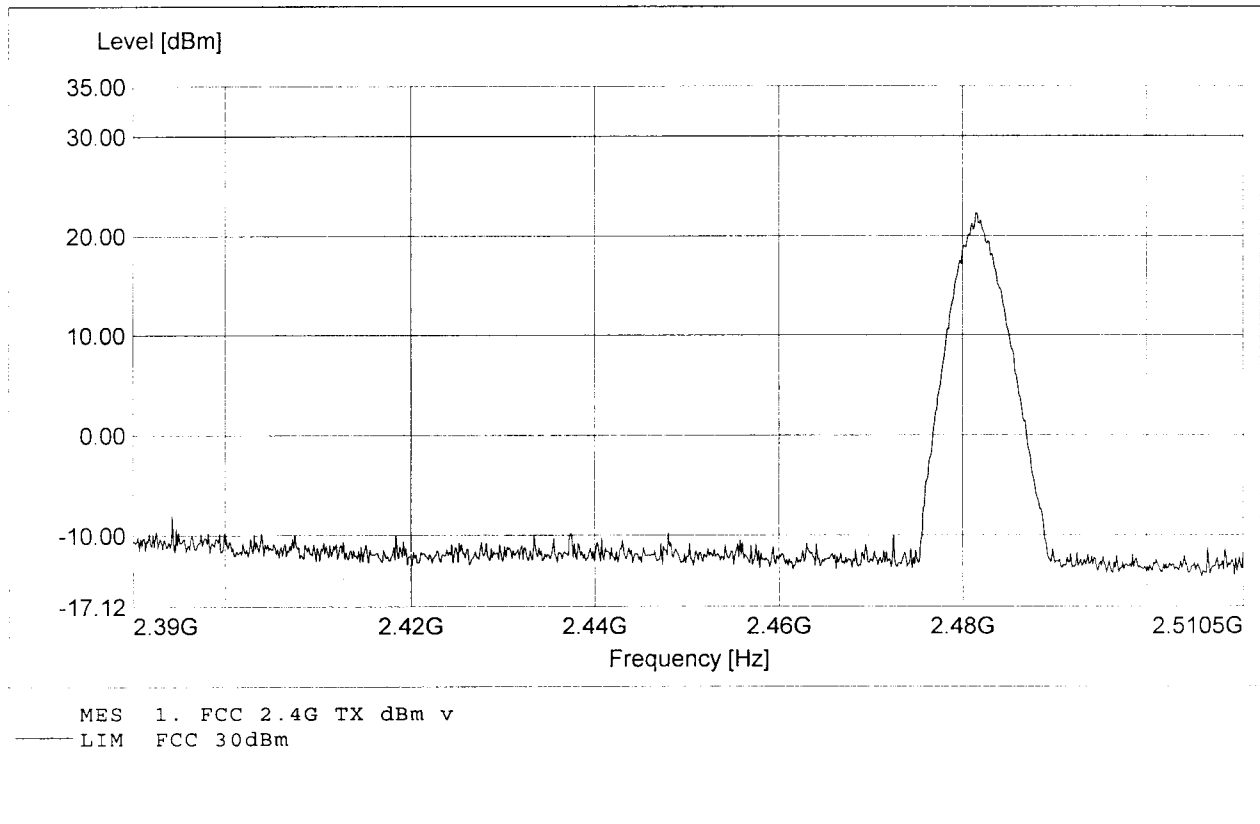

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Cordless Headset / Ant.:2 / Ch.:78
Model: Ellipse 2G4
Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V+15% AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2481,31MHz Pmax:18,85dBm RBW:4MHz

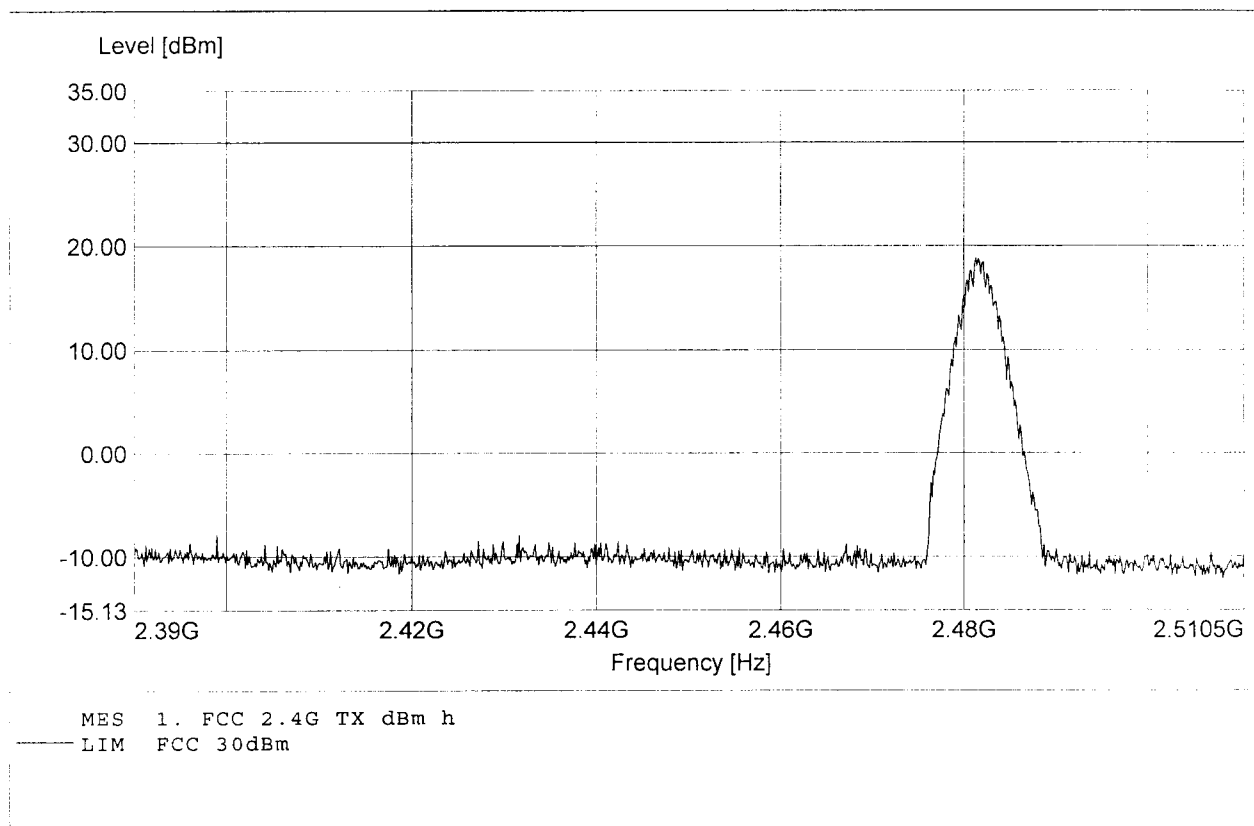




Appendix C

Spurious Emissions radiated - Transmitter operating

Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT/Model : 2.4 GHz Cordless Headset / Ellipse 2G4 / Ch.:0


Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.0%
Comment 1: Dist.: 3m, Ant.: HK116
Comment 2: Freq:25,19MHz Pmax:26,87dBμV/m RBW=100KHz

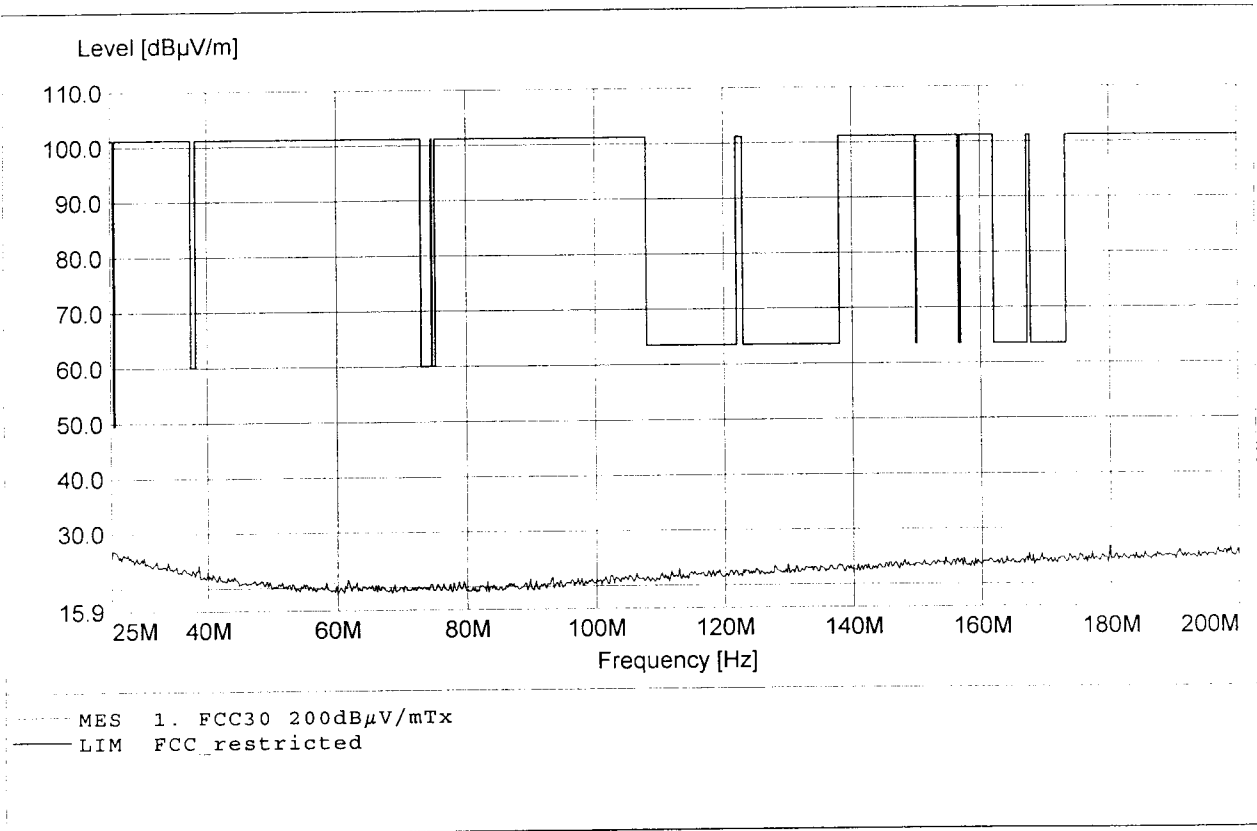

**Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C**

EUT/Model : 2.4 GHz Cordless Headset / Ellipse 2G4 / Ch.:0


Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.0%
Comment 1: Dist.: 3m, Ant.: HK116
Comment 2: Freq:26,16MHz Pmax:26,74dBμV/m RBW=100KHz

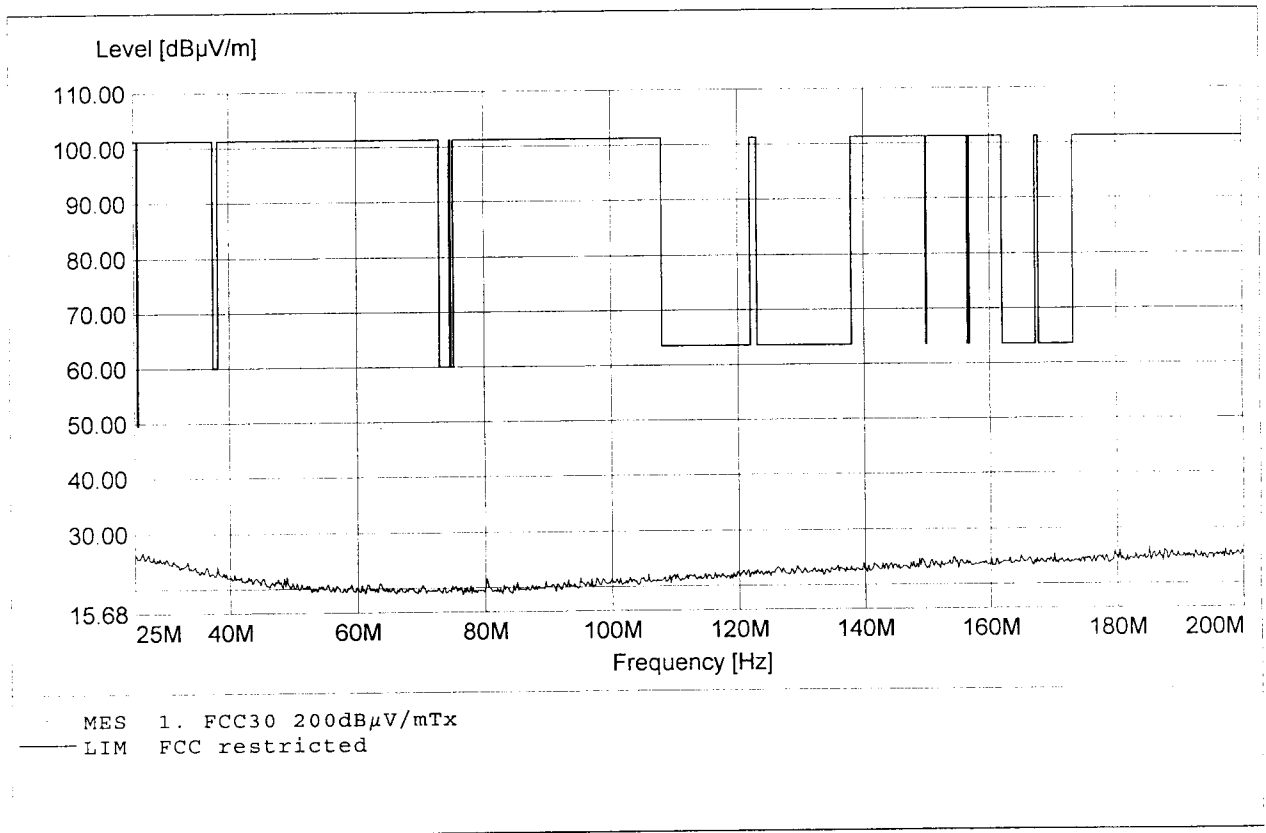

**Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C**

EUT/Model : 2.4 GHz Cordless Headset / Ellipse 2G4 / Ch.:0


Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.0%
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq:969,77MHz Pmax:35,87dBμV/m RBW=100KHz

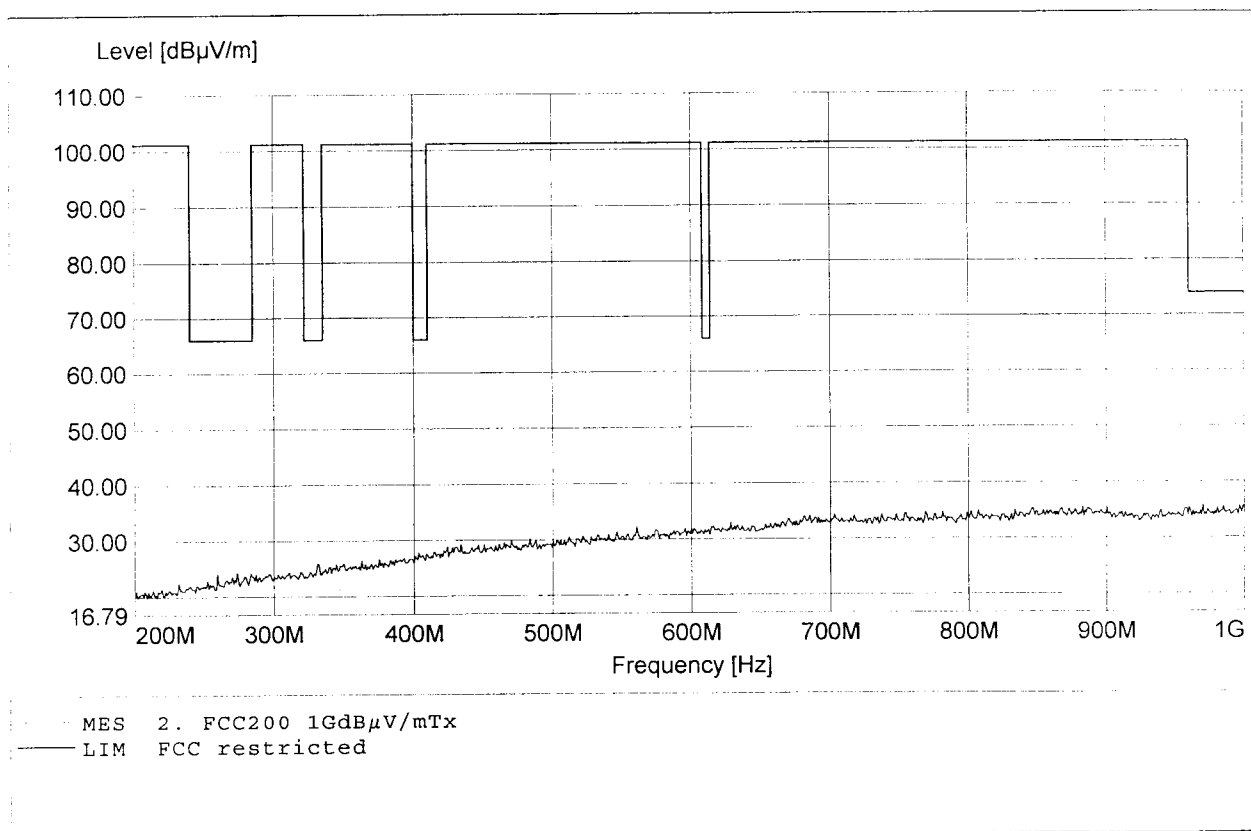

Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT/Model : 2.4 GHz Cordless Headset / Ellipse 2G4 / Ch.:0


Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.0%
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq:994,66MHz Pmax:36,25dBμV/m RBW=100KHz

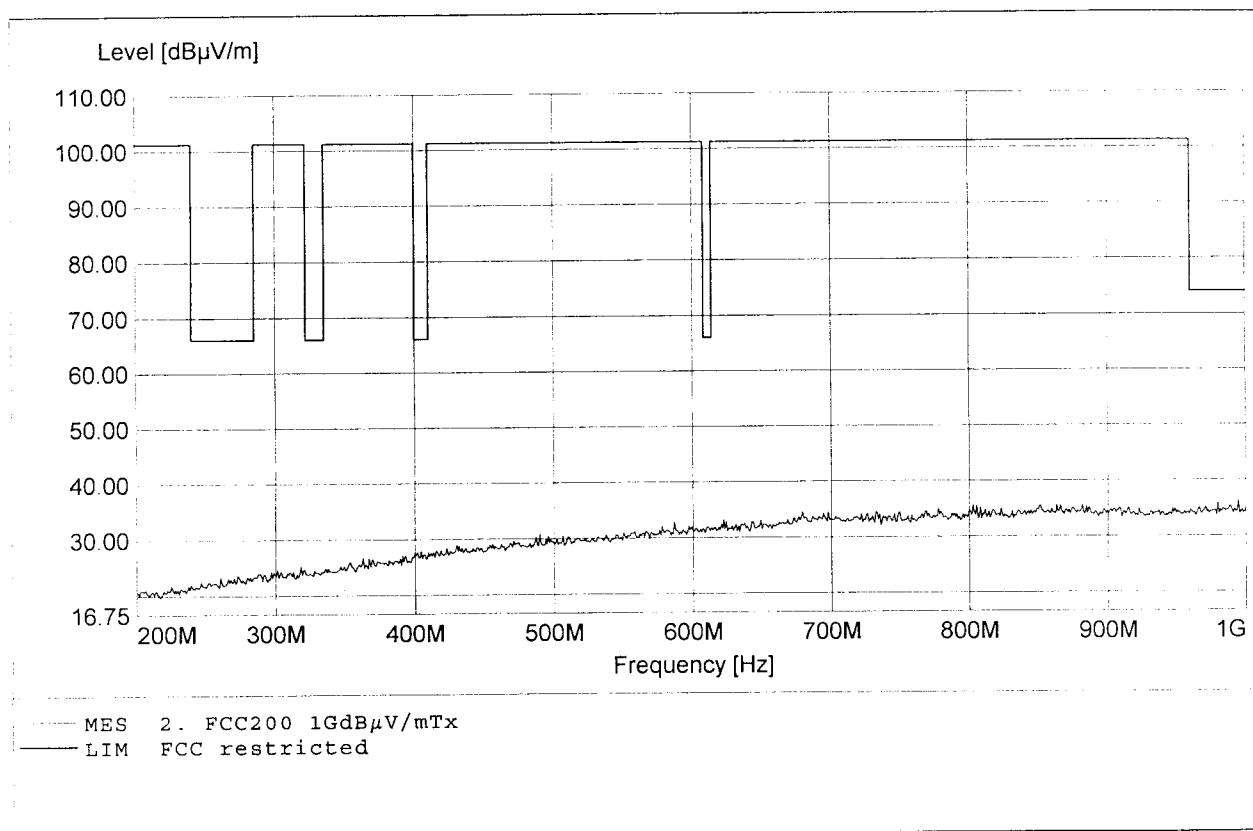

Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT/Model : 2.4 GHz Cordless Headset / Ellipse 2G4 / Ch.:0


Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.0%
Comment 1: Dist.: 3m, Ant.: HL025, Notch-filter
Comment 2: Freq:2399,99MHz Pmax:92,21dBµV/m RBW=1MHz

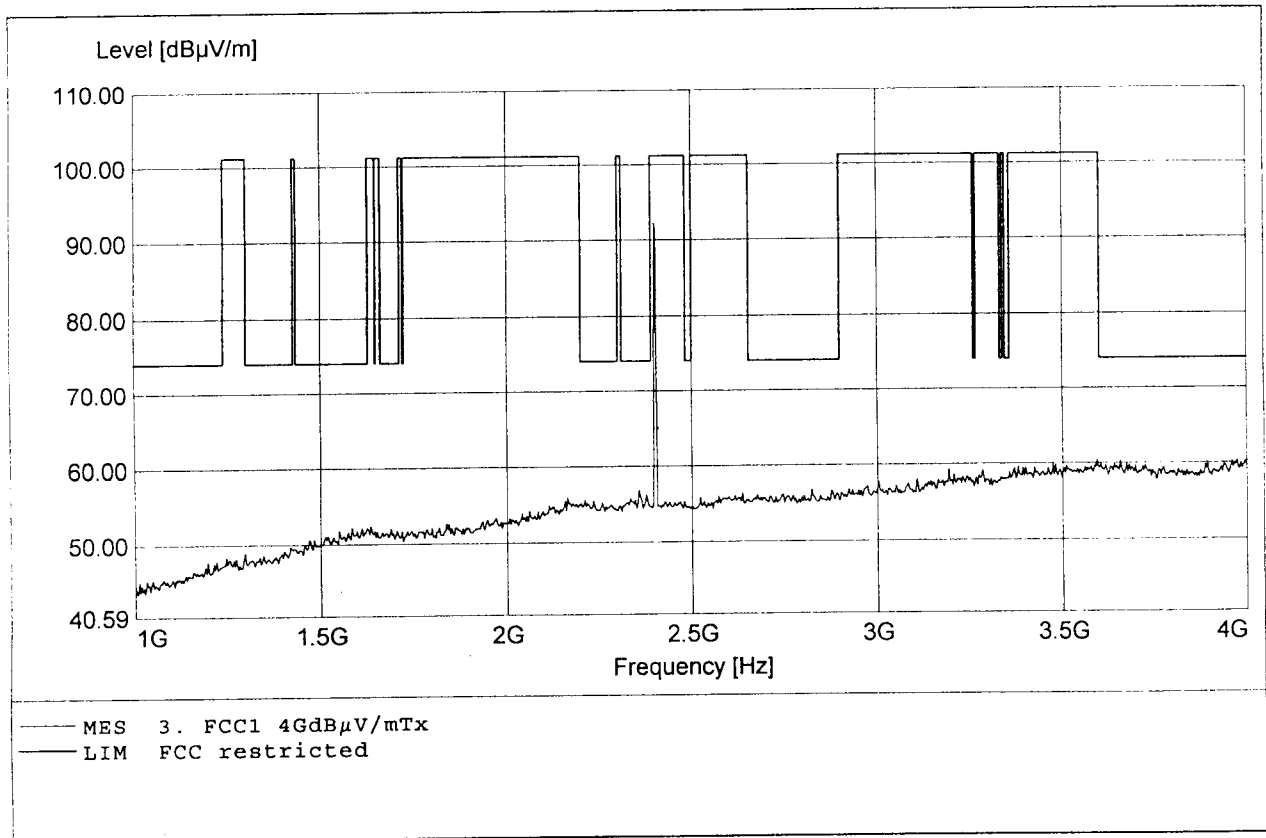

Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C


EUT/Model : 2.4 GHz Cordless Headset / Ellipse 2G4 / Ch.:0

Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.0%
Comment 1: Dist.: 3m, Ant.: HL025, Notch-filter
Comment 2: Freq:2403,33MHz Pmax:90,46dBμV/m RBW=1MHz

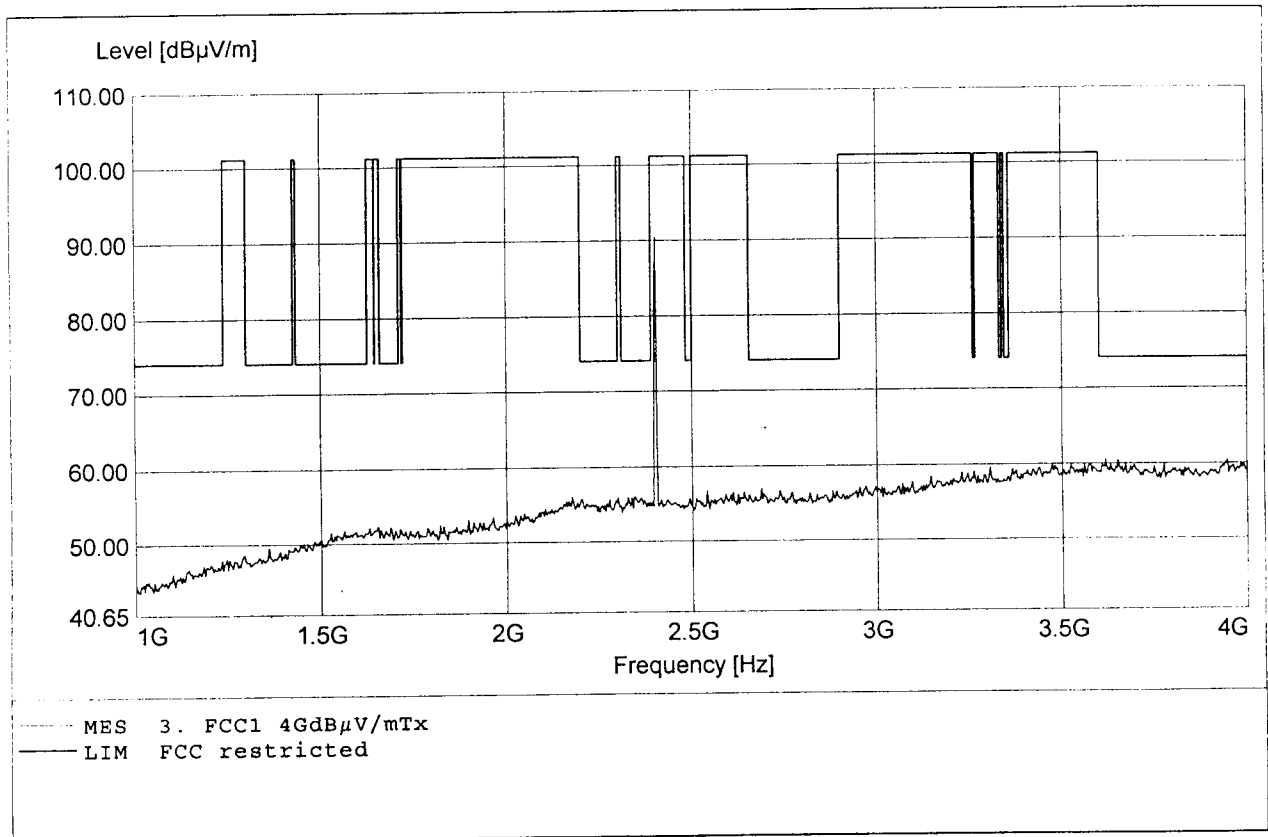


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Cordless Headset / Ch.:0
Applicant: GN - Netcom A/S
Model : Ellipse 2G4
Temperature/ Voltage: Tnom=25 °C / 110 V AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: BBHA2190D amplif.
Comment 2: Freq:7.206GHz Pmax:62.34dBµV/m RBW:1MHz

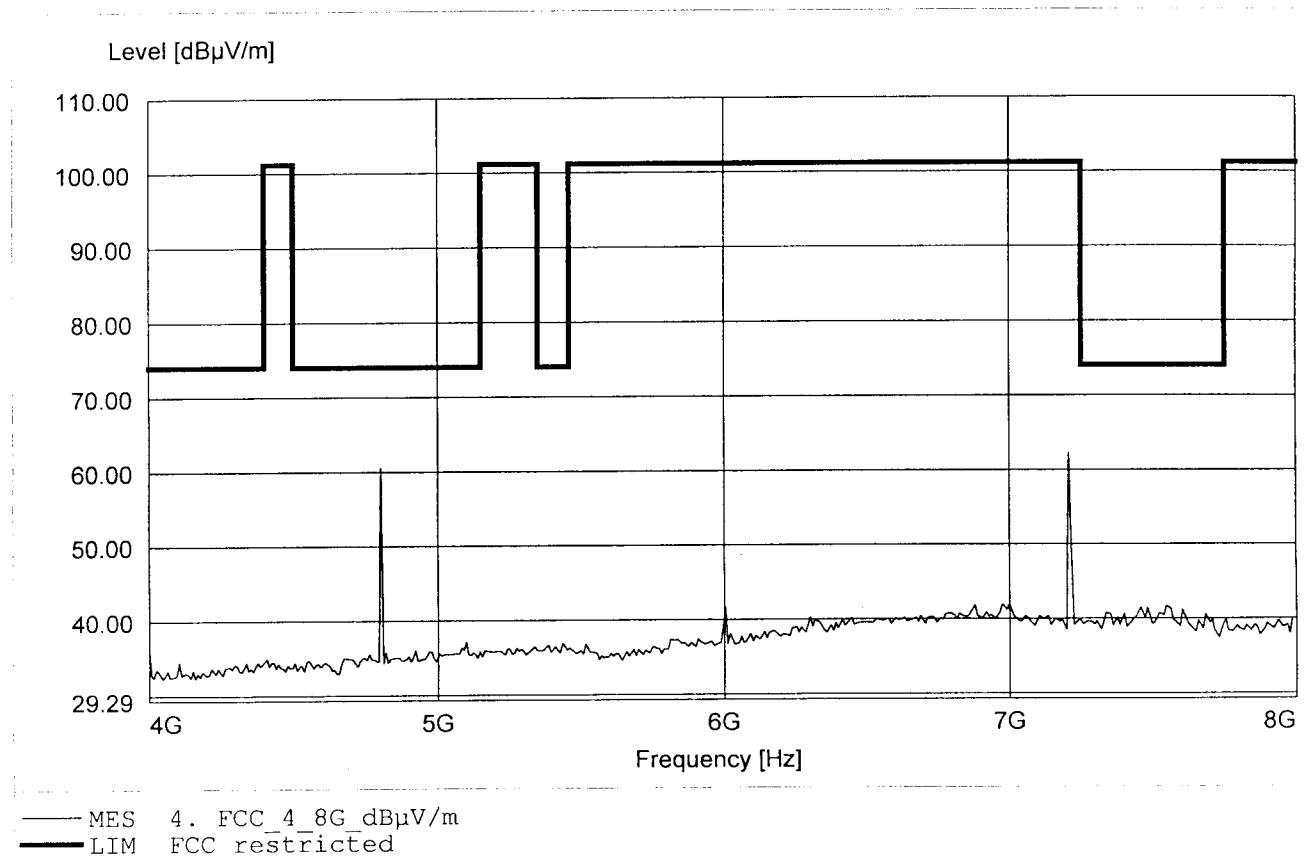

Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Headset / Ch.:0
Applicant: GN - Netcom A/S
Model: Ellipse 2G4
Temperature/ Voltage: Tnom=25 °C / 110 V AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: BBHA2190D amplif.
Comment 2: Freq:7.206GHz Pmax:51.18dBµV/m RBW:1MHz

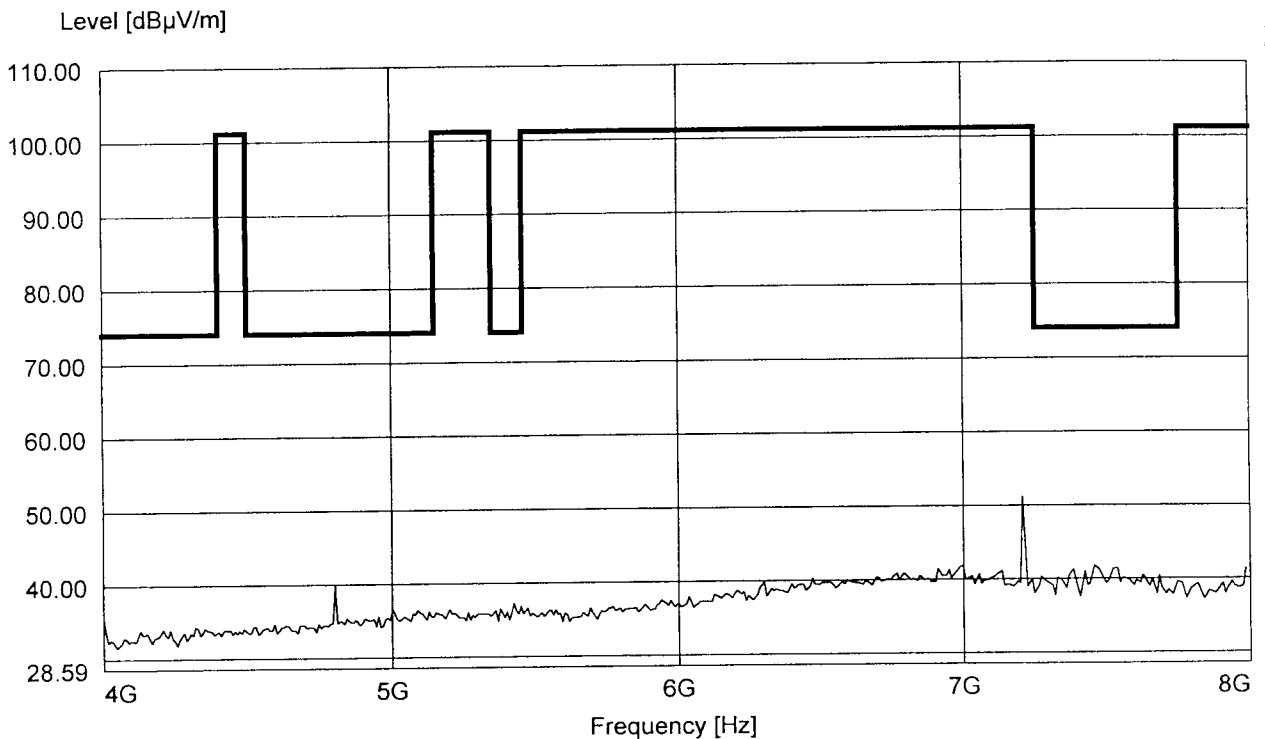

— MES 4. FCC_4_8G_dBµV/m
— LIM FCC_restricted


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Cordless Headset / Ch.:0
Applicant: GN - Netcom A/S
Model : Ellipse 2G4
Temperature/ Voltage: Tnom=25 °C / 110 V AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq:12.008GHz Pmax:48.30dBµV/m RBW:1MHz

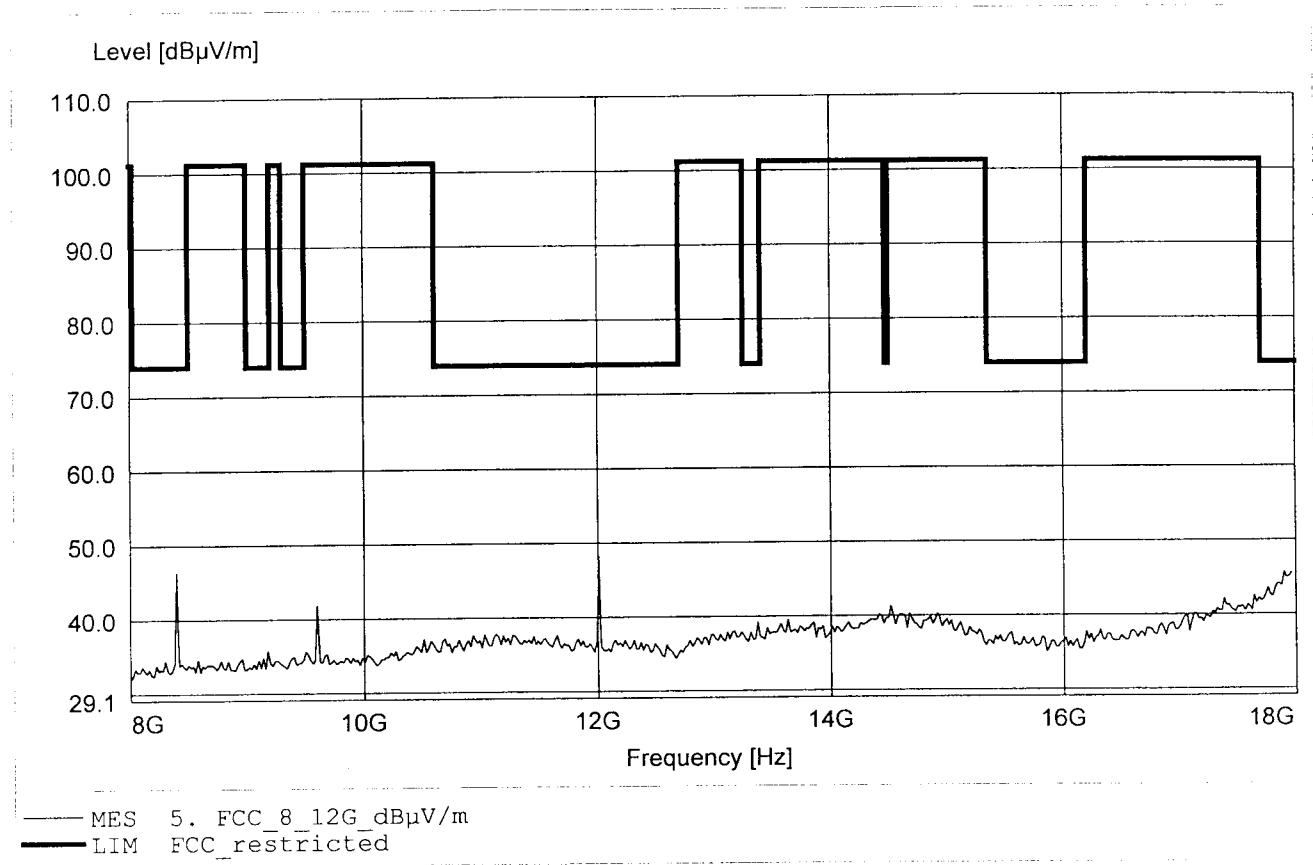


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Cordless Headset / Ch.:0
Applicant: GN - Netcom A/S
Model : Ellipse 2G4
Temperature/ Voltage: Tnom=25 °C / 110 V AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq:17.940GHz Pmax:45.52dBµV/m RBW:1MHz

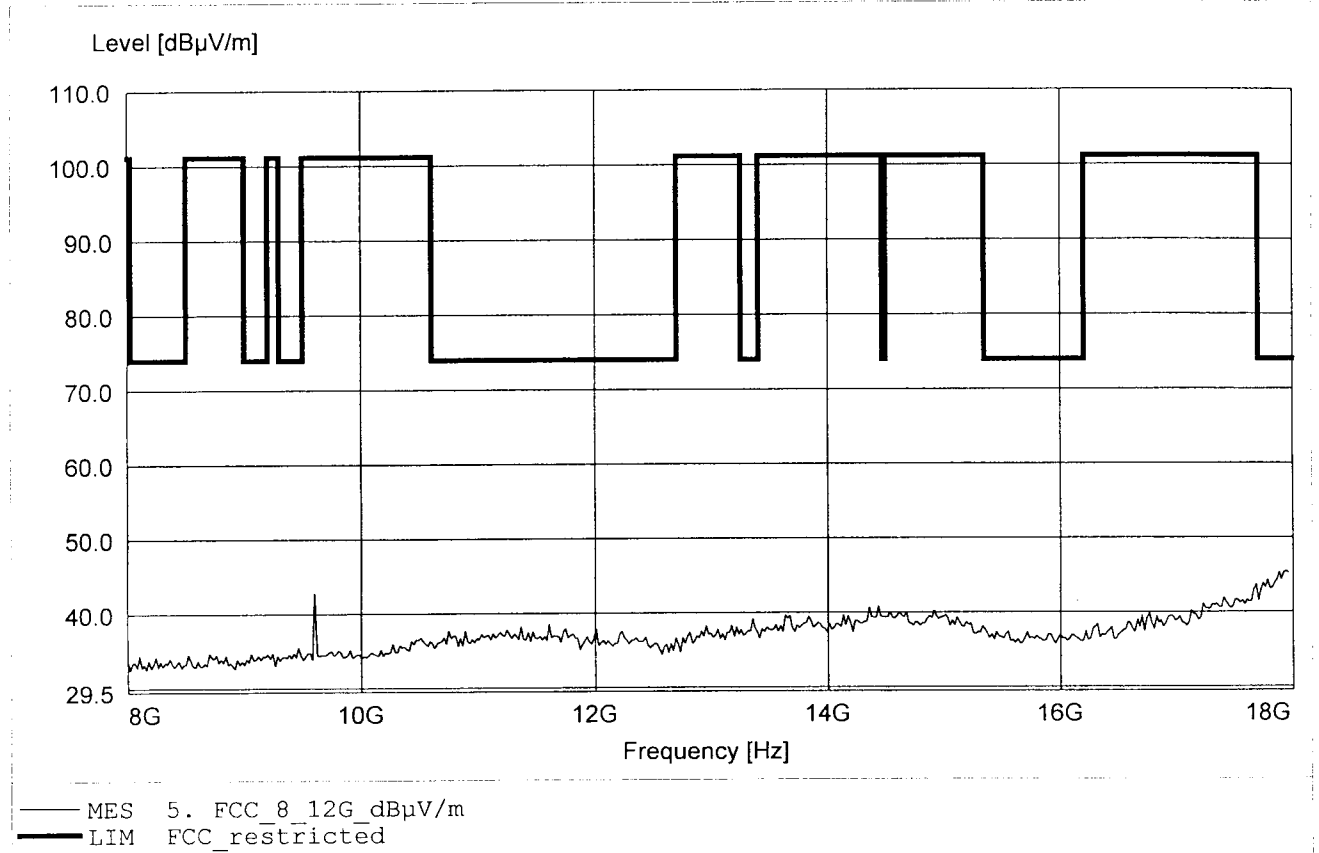


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Cordless Headset / Ch.:0
Applicant: GN - Netcom A/S
Model : Ellipse 2G4
Temperature/ Voltage: Tnom=25 °C / 110 V AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:25.716GHz Pmax:52.64dBµV/m RBW:1MHz

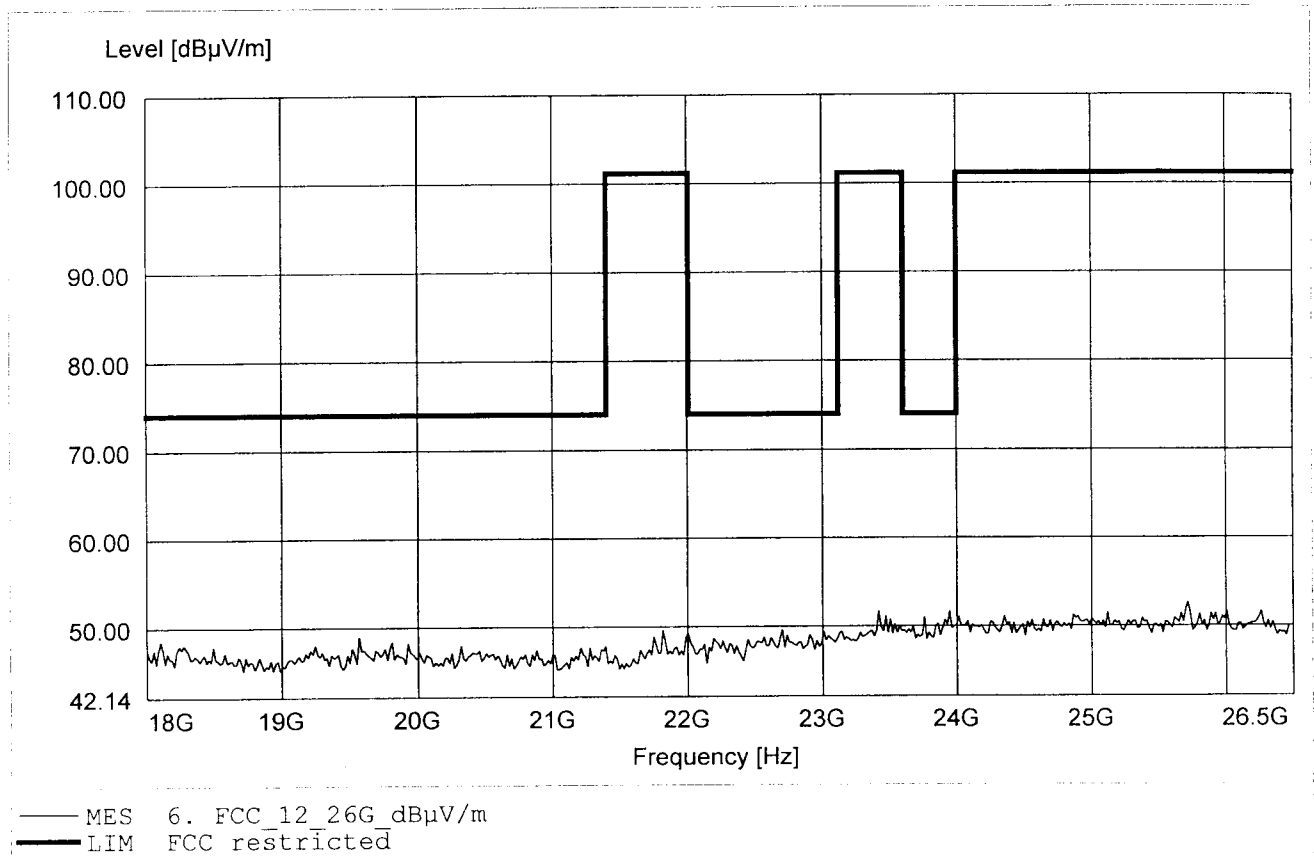

Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Headset / Ch.:0
Applicant: GN - Netcom A/S
Model : Ellipse 2G4
Temperature/ Voltage: Tnom=25 °C / 110 V AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:25.631GHz Pmax:52.15dBµV/m RBW:1MHz

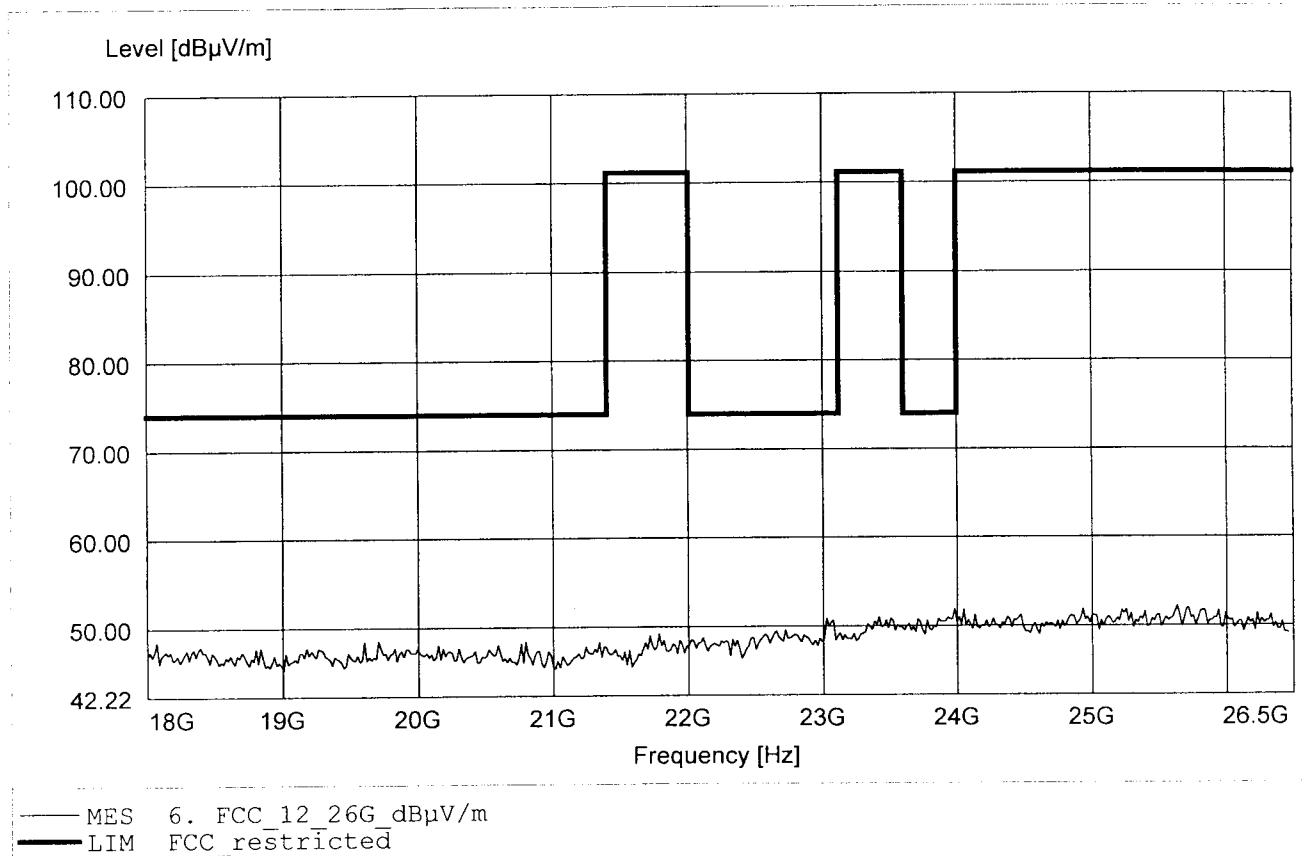

Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C


EUT/Model : 2.4 GHz Cordless Headset / Ellipse 2G4 / Ch.:40

Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.0%
Comment 1: Dist.: 3m, Ant.: HK116
Comment 2: Freq:25,06MHz Pmax:27,6dBμV/m RBW=100KHz

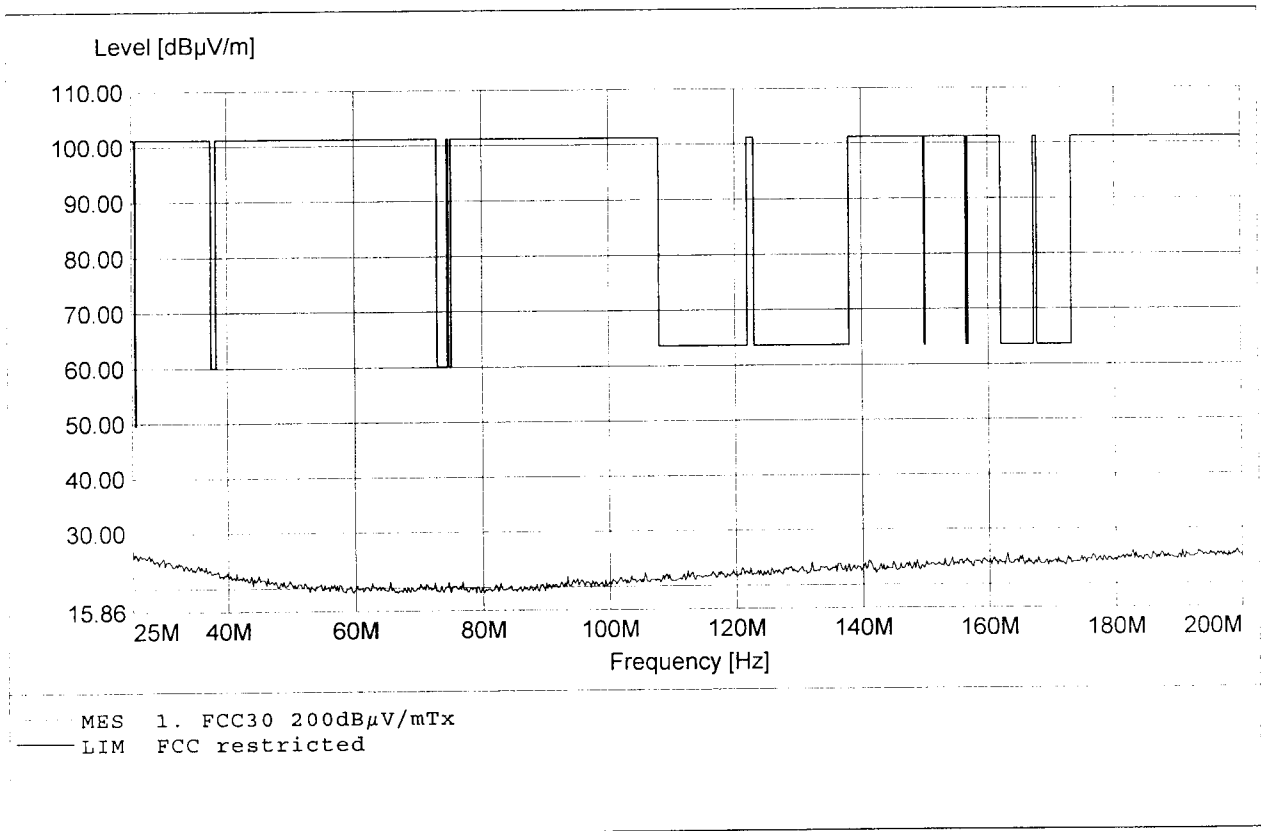


**Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C**

EUT/Model : 2.4 GHz Cordless Headset / Ellipse 2G4 / Ch.:40
Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.0%
Comment 1: Dist.: 3m, Ant.: HK116
Comment 2: Freq:197,27MHz Pmax:26,55dBµV/m RBW=100KHz

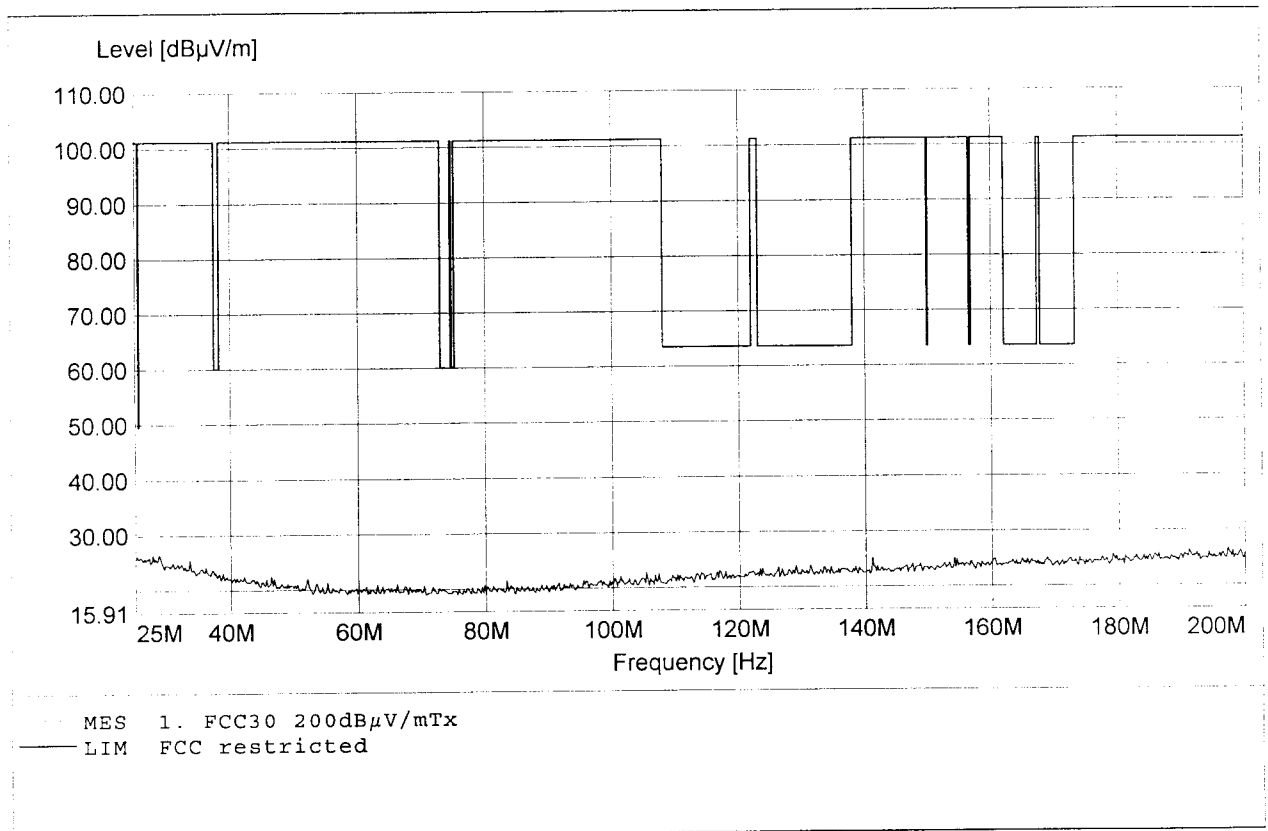

Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C


EUT/Model : 2.4 GHz Cordless Headset / Ellipse 2G4 / Ch.:40
Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.0%
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq:972,44MHz Pmax:35,73dBμV/m RBW=100KHz

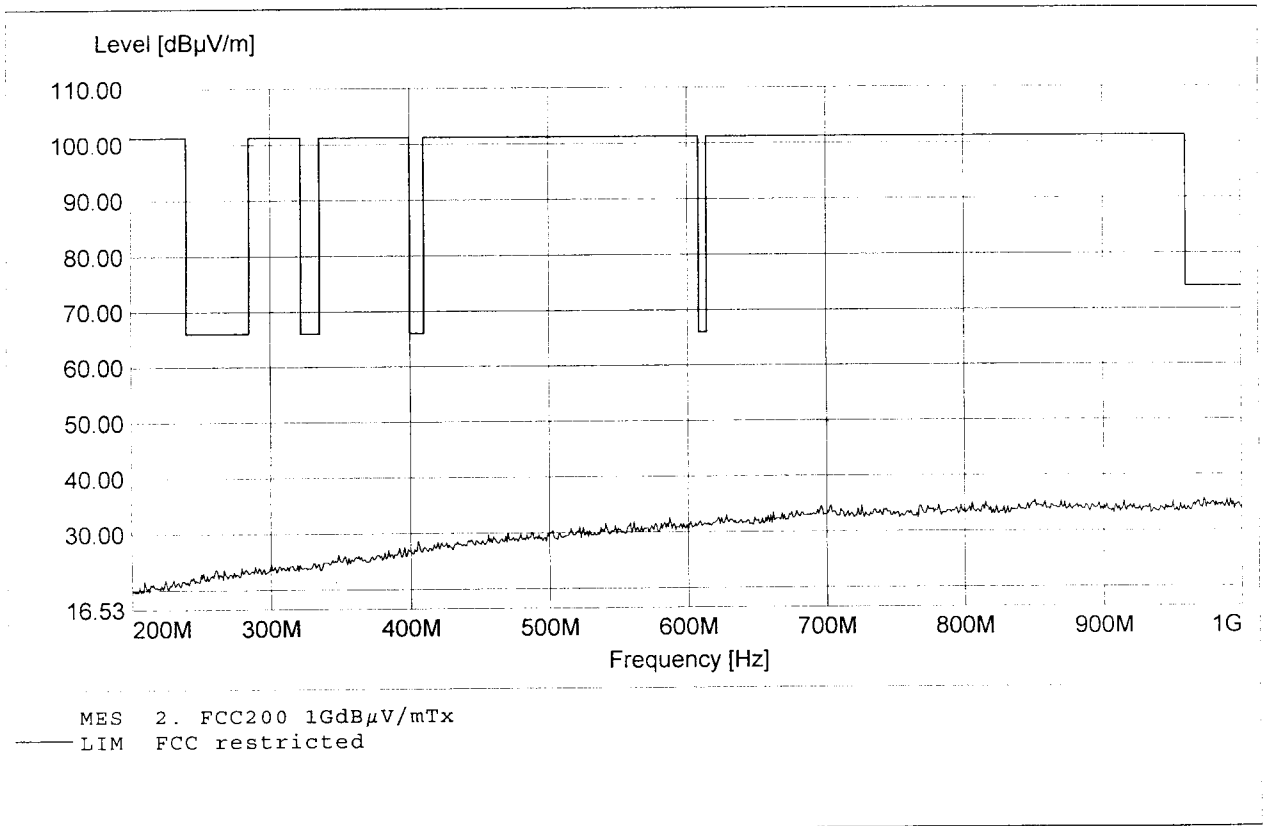

**Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C**

EUT/Model : 2.4 GHz Cordless Headset / Ellipse 2G4 / Ch.:40


Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.0%
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq:837,33MHz Pmax:35,60dBµV/m RBW=100KHz

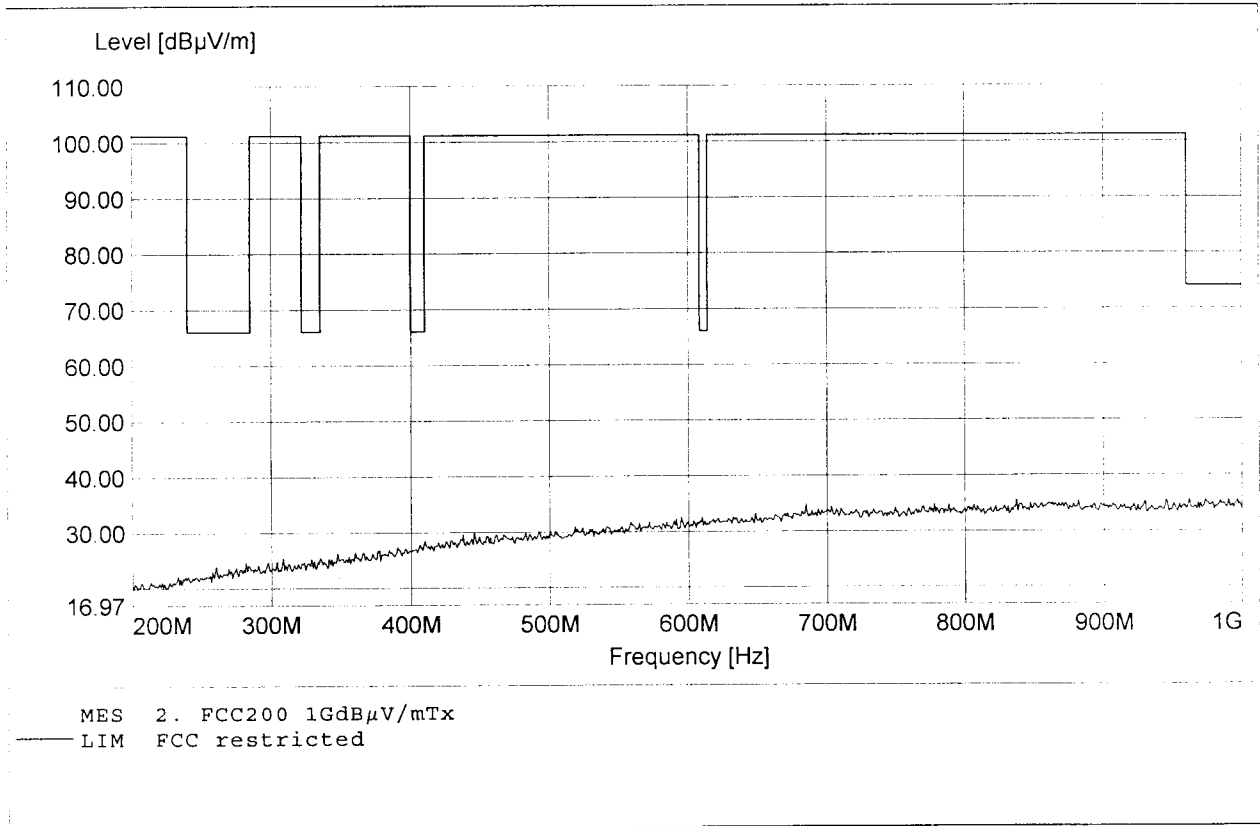

Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT/Model : 2.4 GHz Cordless Headset / Ellipse 2G4 / Ch.:40


Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.0%
Comment 1: Dist.: 3m, Ant.: HL025, Notch-filter
Comment 2: Freq:2443,33MHz Pmax:62,80dBμV/m RBW=1MHz

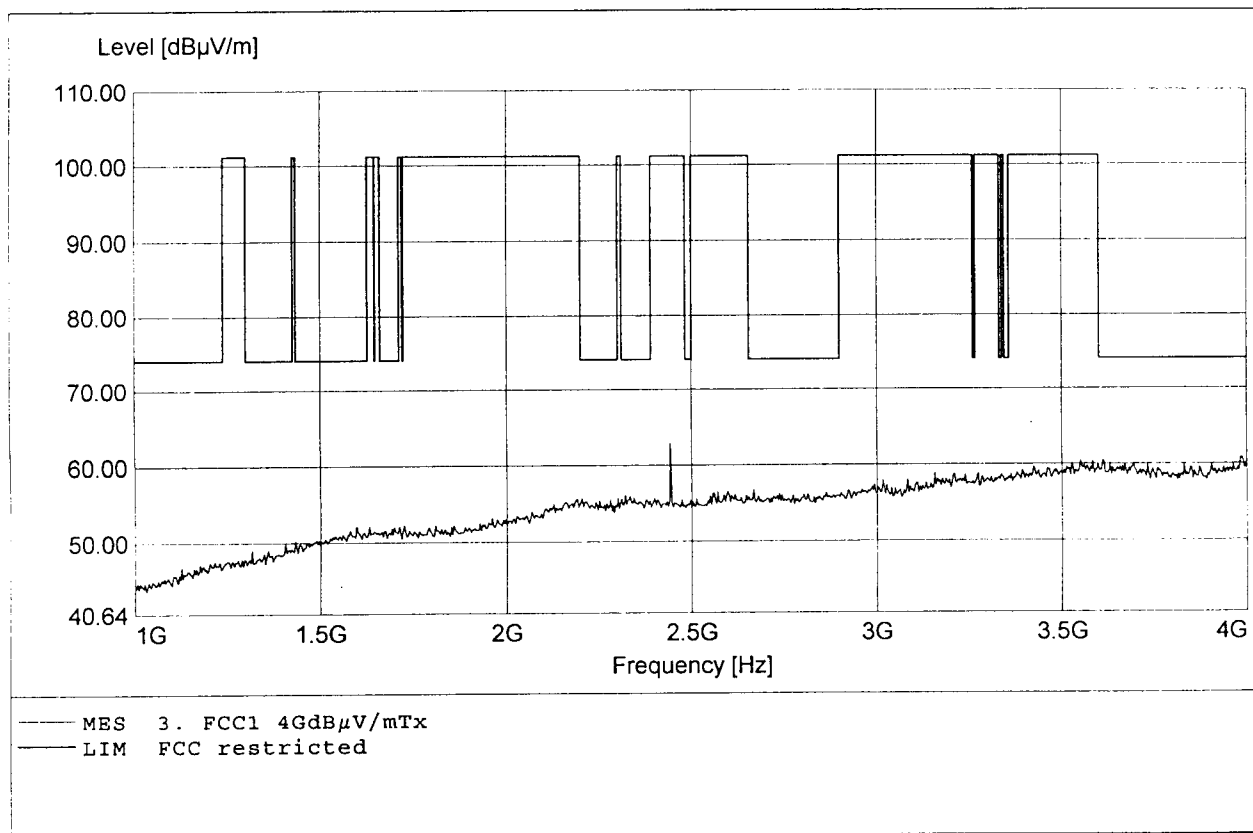

Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C


EUT/Model : 2.4 GHz Cordless Headset / Ellipse 2G4 / Ch.:40

Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.0%
Comment 1: Dist.: 3m, Ant.: HL025, Notch-filter
Comment 2: Freq:2443,33MHz Pmax:62,77dBμV/m RBW=1MHz

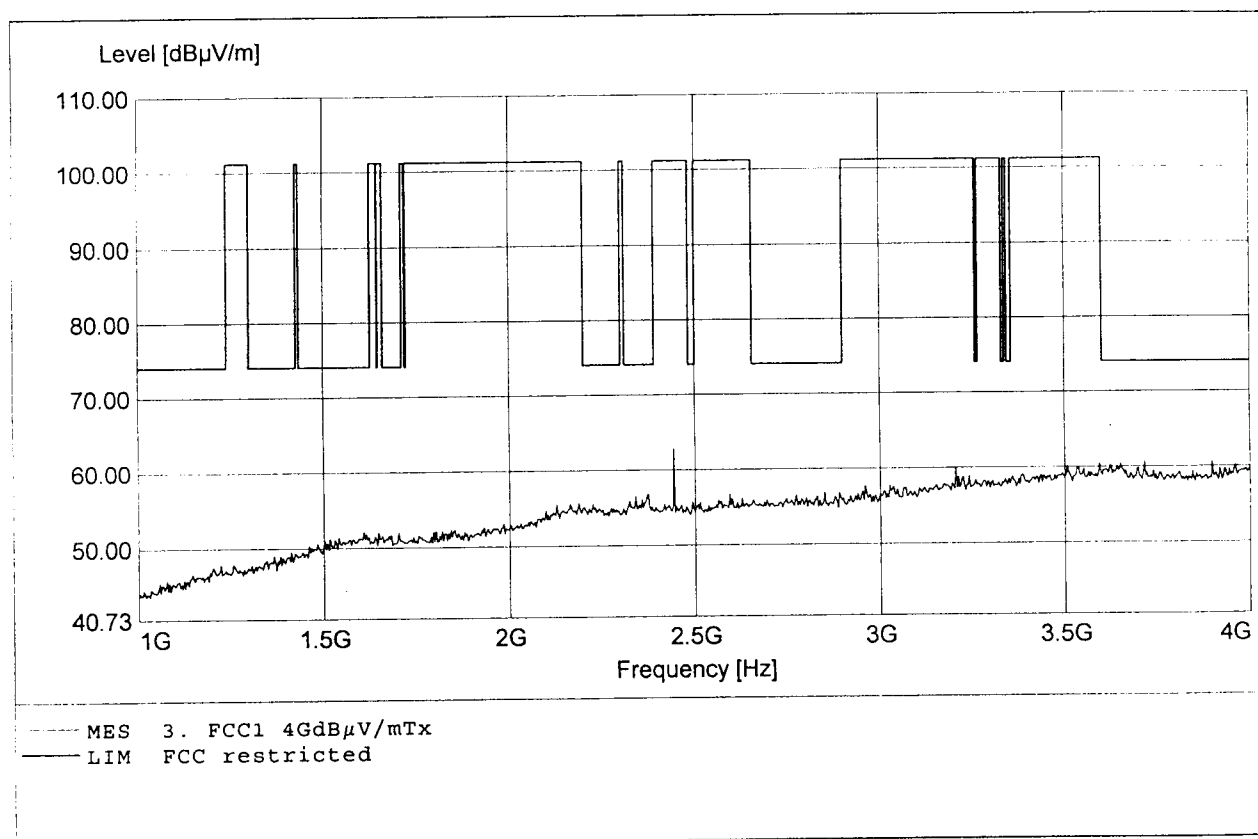


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Cordless Headset / Ch.:40
Applicant: GN - Netcom A/S
Model: Ellipse 2G4
Temperature/ Voltage: Tnom=25 °C / 110 V AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: BBHA2190D amplif.
Comment 2: Freq:4.882GHz Pmax:62.46dBµV/m RBW:1MHz

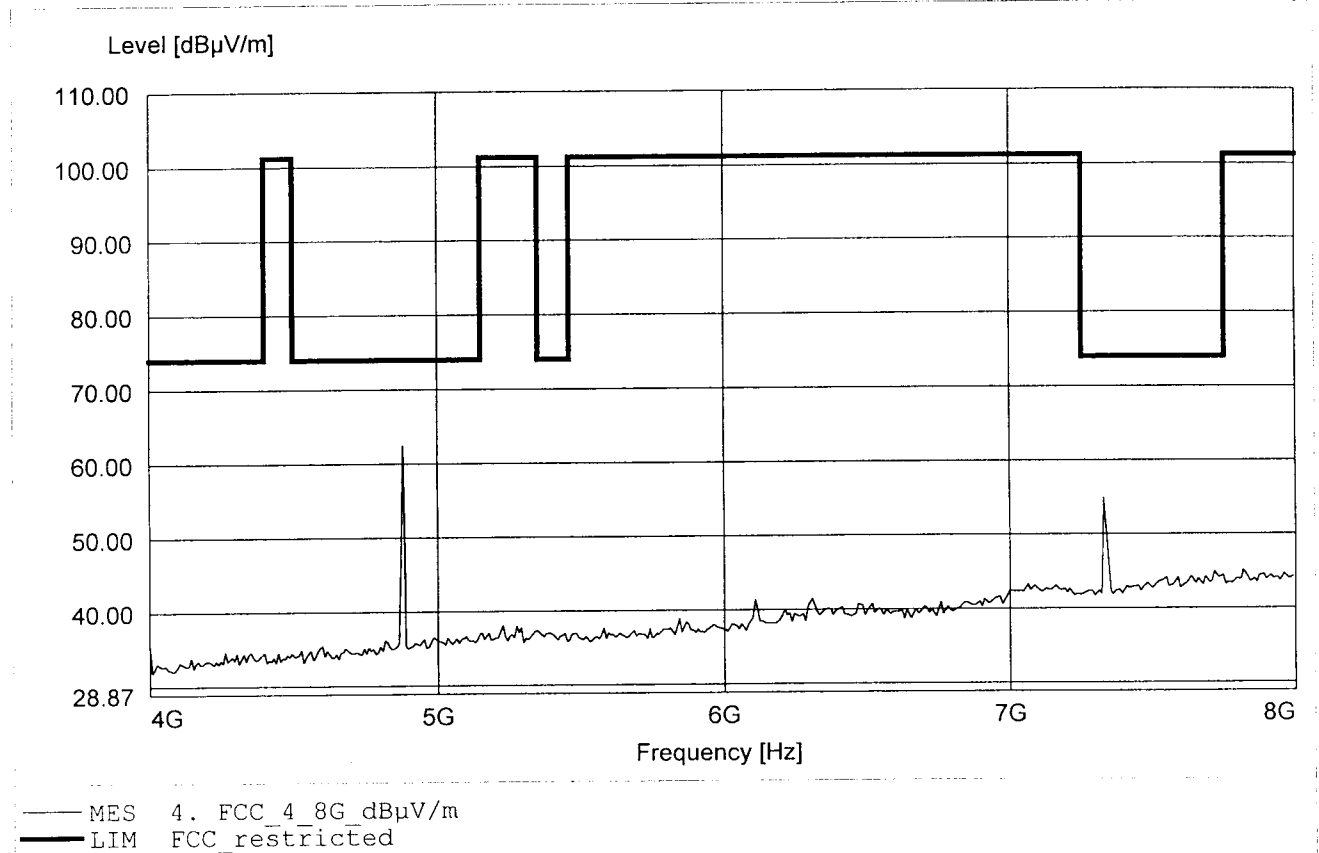


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Cordless Headset / Ch.:40
Applicant: GN - Netcom A/S
Model : Ellipse 2G4
Temperature/ Voltage: Tnom=25 °C / 110 V AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: BBHA2190D amplif.
Comment 2: Freq:4.882GHz Pmax:62.96dBµV/m RBW:1MHz

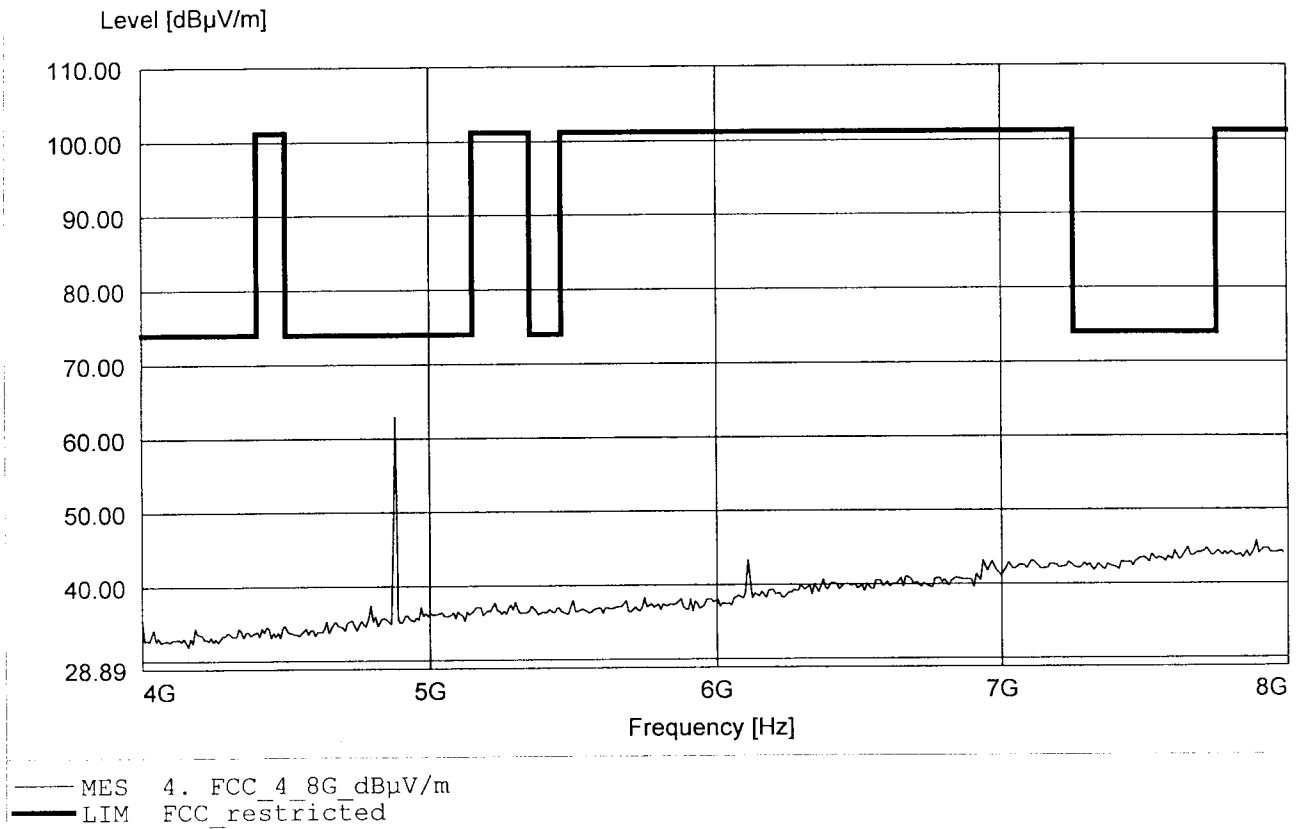


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Cordless Headset / Ch.:40
Applicant: GN - Netcom A/S
Model : Ellipse 2G4
Temperature/ Voltage: Tnom=25 °C / 110 V AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq:12.208GHz Pmax:52.02dBµV/m RBW:1MHz

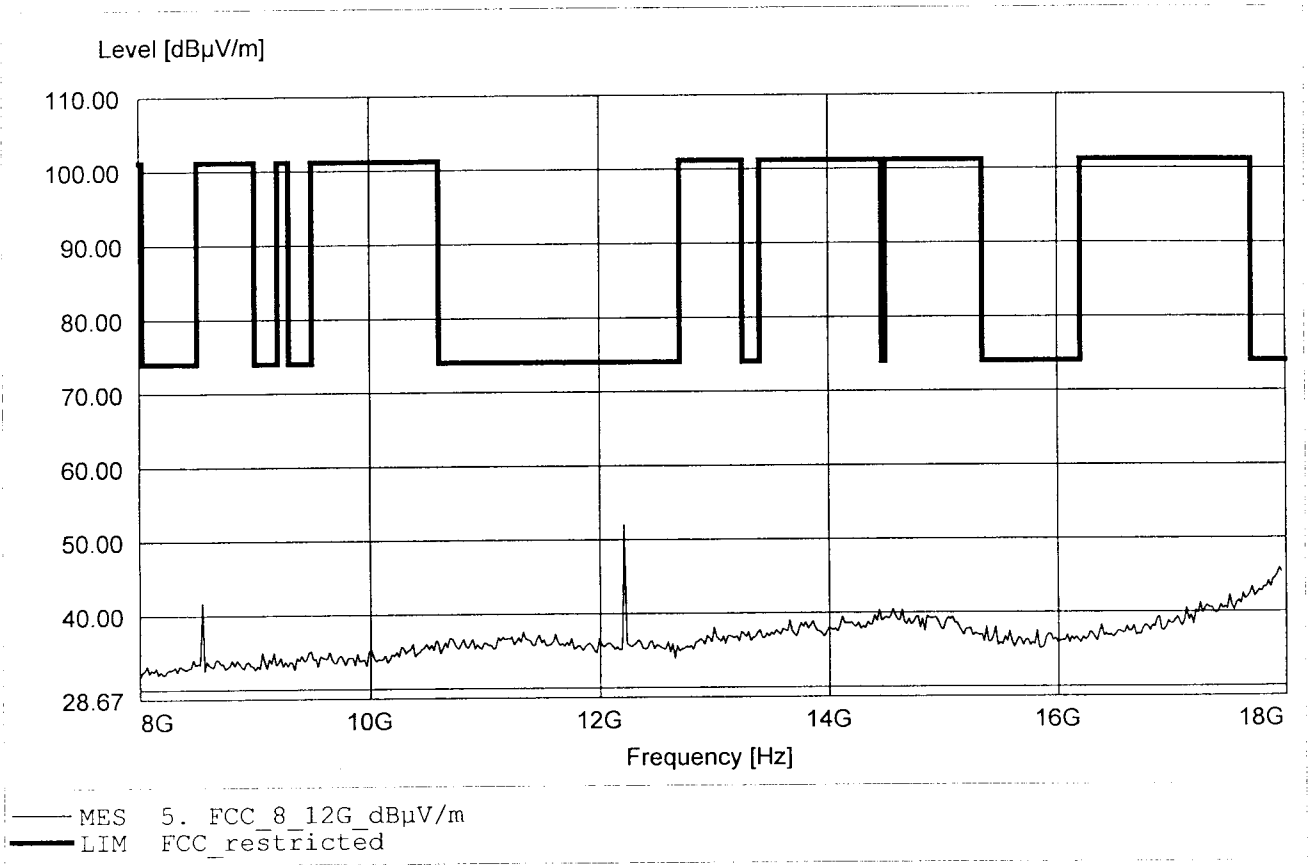


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Cordless Headset / Ch.:40
Applicant: GN - Netcom A/S
Model : Ellipse 2G4
Temperature/ Voltage: Tnom=25 °C / 110 V AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq:17.940GHz Pmax:44.72dBµV/m RBW:1MHz

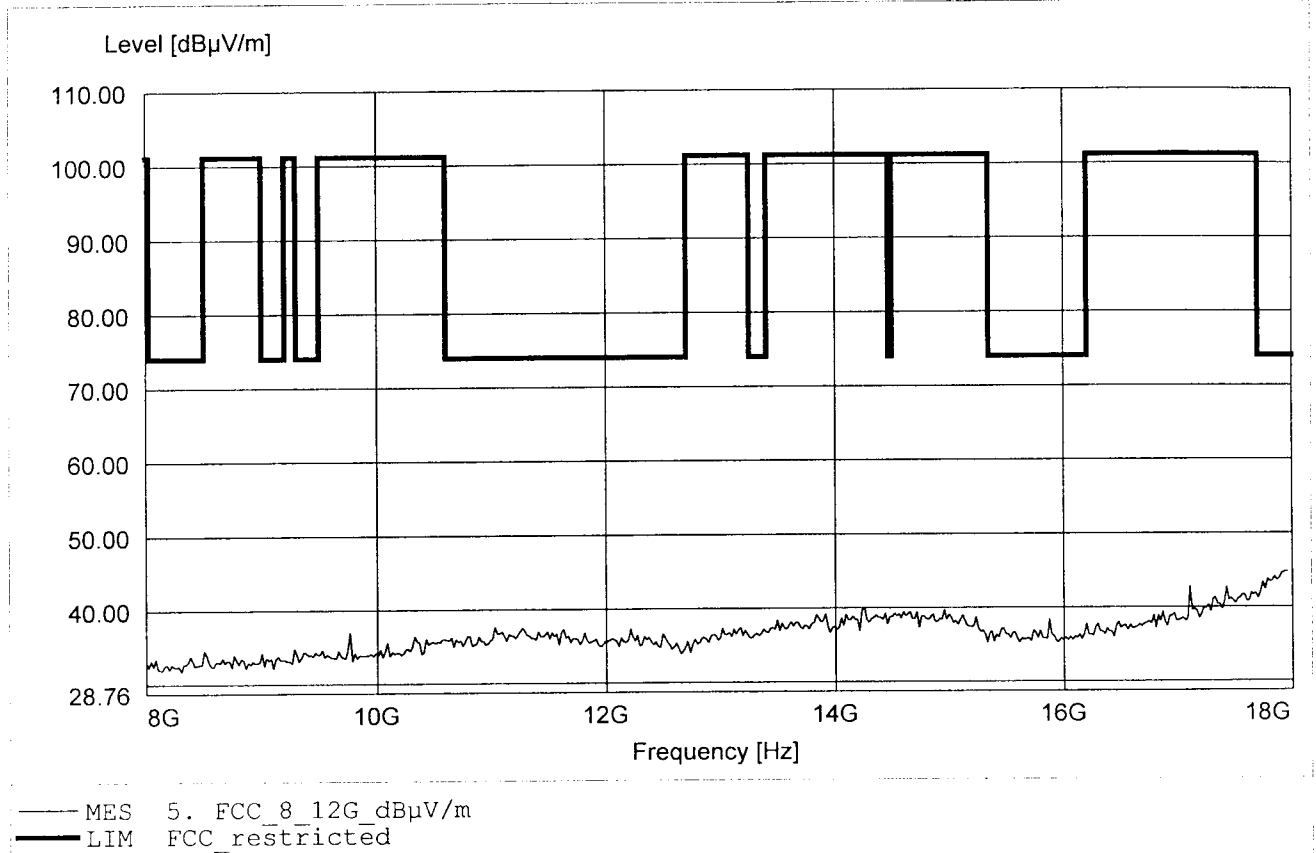

Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Headset / Ch.:40
Applicant: GN - Netcom A/S
Model : Ellipse 2G4
Temperature/ Voltage: Tnom=25 °C / 110 V AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:25.018GHz Pmax:52.51dBµV/m RBW:1MHz

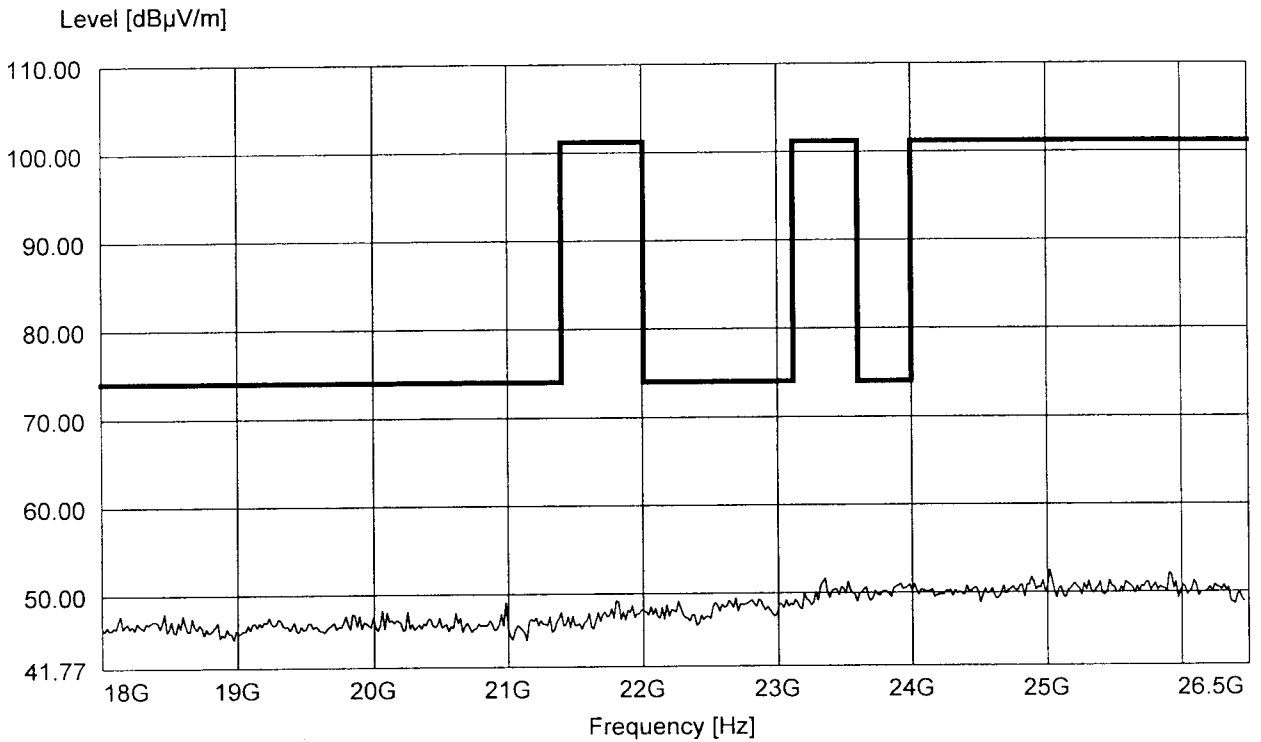

— MES 6. FCC_12_26G_dBµV/m
— LIM FCC_restricted

Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Cordless Headset / Ch.:40
Applicant: GN - Netcom A/S
Model : Ellipse 2G4
Temperature/ Voltage: Tnom=25 °C / 110 V AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:24.030GHz Pmax:52.81dBµV/m RBW:1MHz

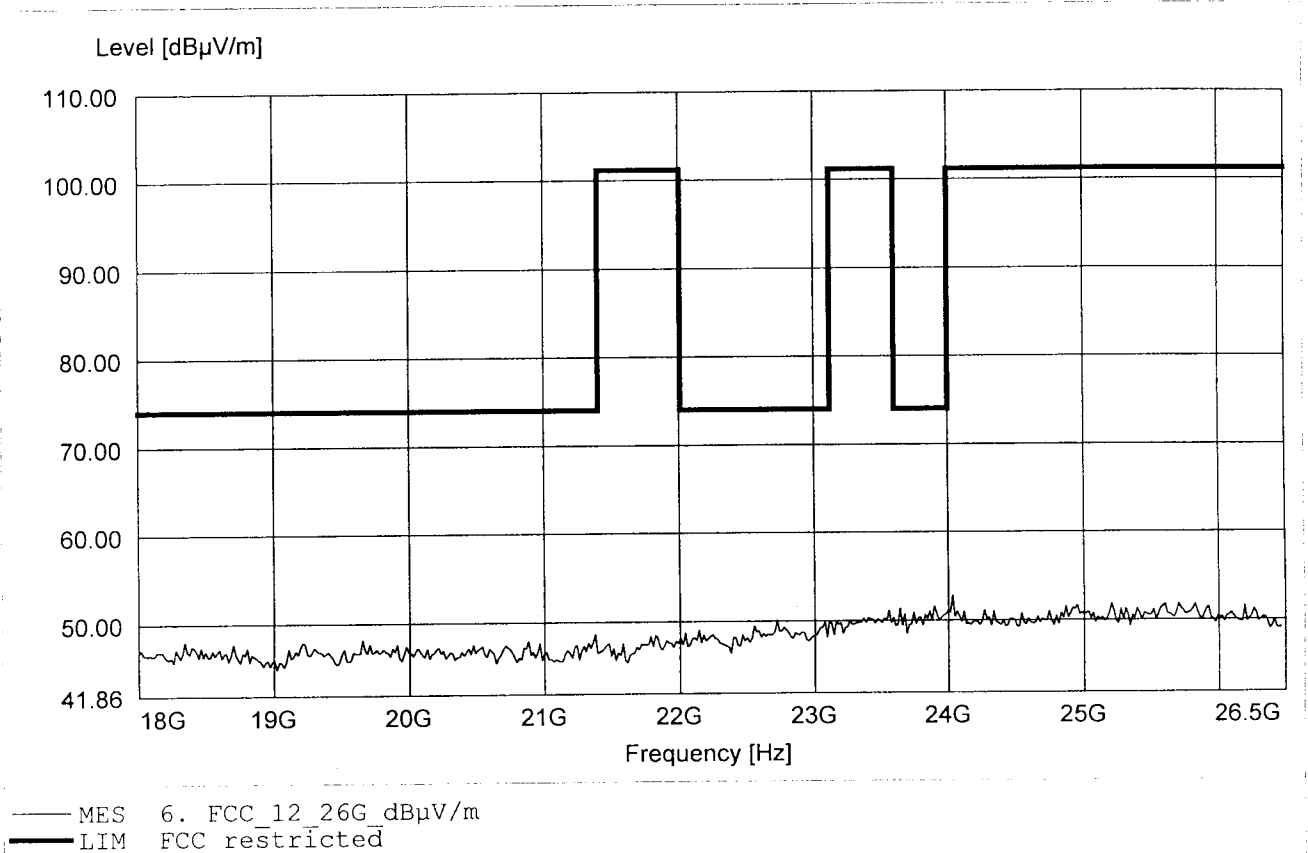

Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT/Model : 2.4 GHz Cordless Headset / Ellipse 2G4 / Ch.:78

Applicant: GN - Netcom A/S
Temperature/ Voltage: 22°C / 110 V AC/DC adaptor
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.0%
Comment 1: Dist.: 3m, Ant.: HK116
Comment 2: Freq:25,19MHz Pmax:26,49dBμV/m RBW=100KHz

