




## Appendix B

Peak Output Power




Ref Lvl 25 dBm  
Marker 1 [T1] 22.08 dBm  
2.40103908 GHz  
RBW 1 MHz RF Att 50 dB  
VBW 1 MHz  
SWT 5 ms Unit dBm

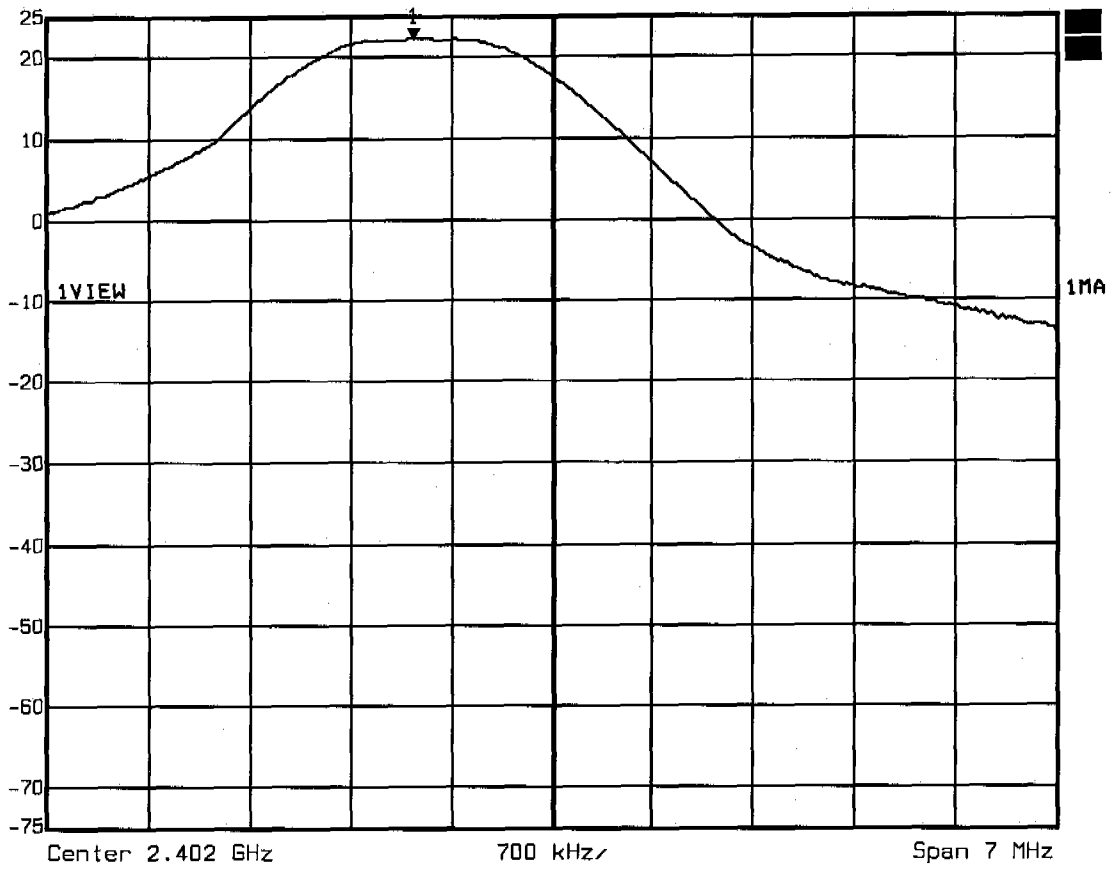

Title: Peak Output Power conducted Ch.: 0  
Comment A: GN Netcom Cordless Headset 264 FCC Base  
Date: 22.MAR.2005 13:32:49




Marker 1 [T1] RBW 1 MHz RF Att 50 dB  
Ref Lvl 25 dBm 22.14 dBm VBW 1 MHz  
2.44169439 GHz SWT 5 ms Unit dBm

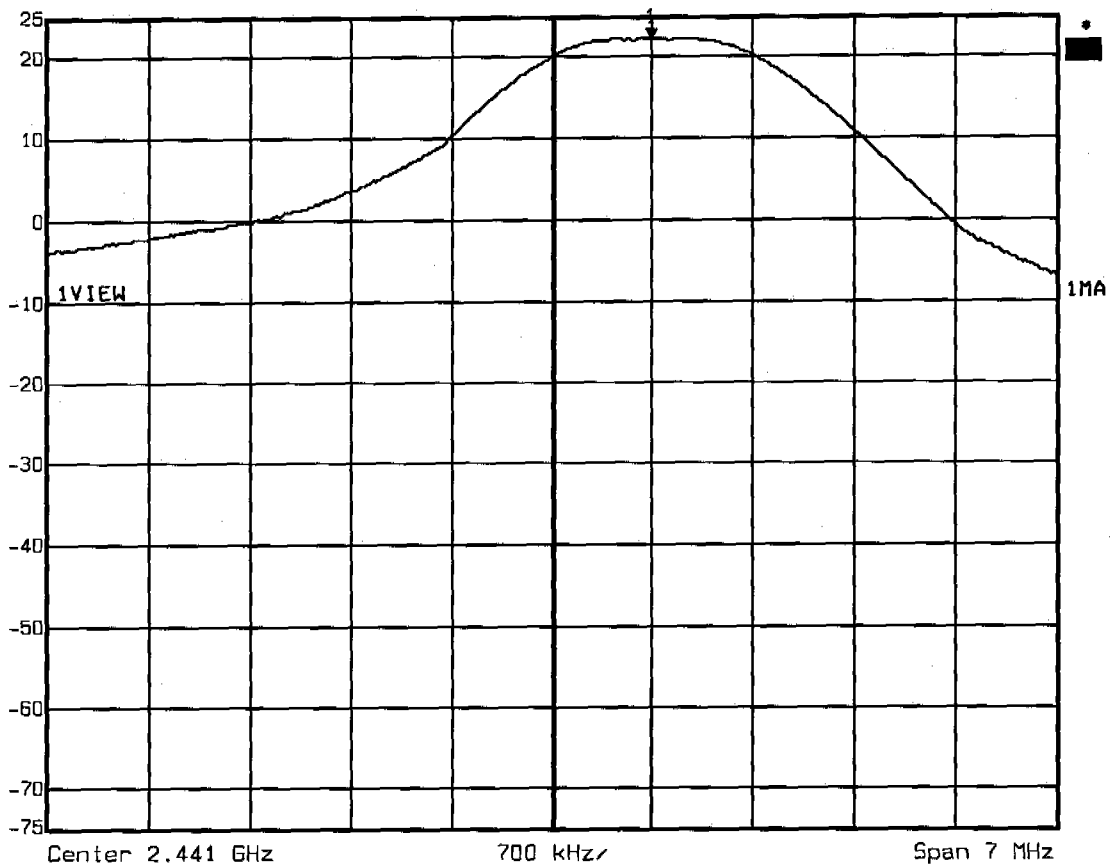

Title: Peak Output Power conducted Ch.: 47  
Comment A: GN Netcom Cordless Headset 264 FCC Base  
Date: 22.MAR.2005 13:34:17




Marker 1 [T1] RBW 1 MHz RF Att 50 dB  
Ref Lvl 21.95 dBm VBW 1 MHz  
25 dBm 2.48229176 GHz SWT 5 ms Unit dBm

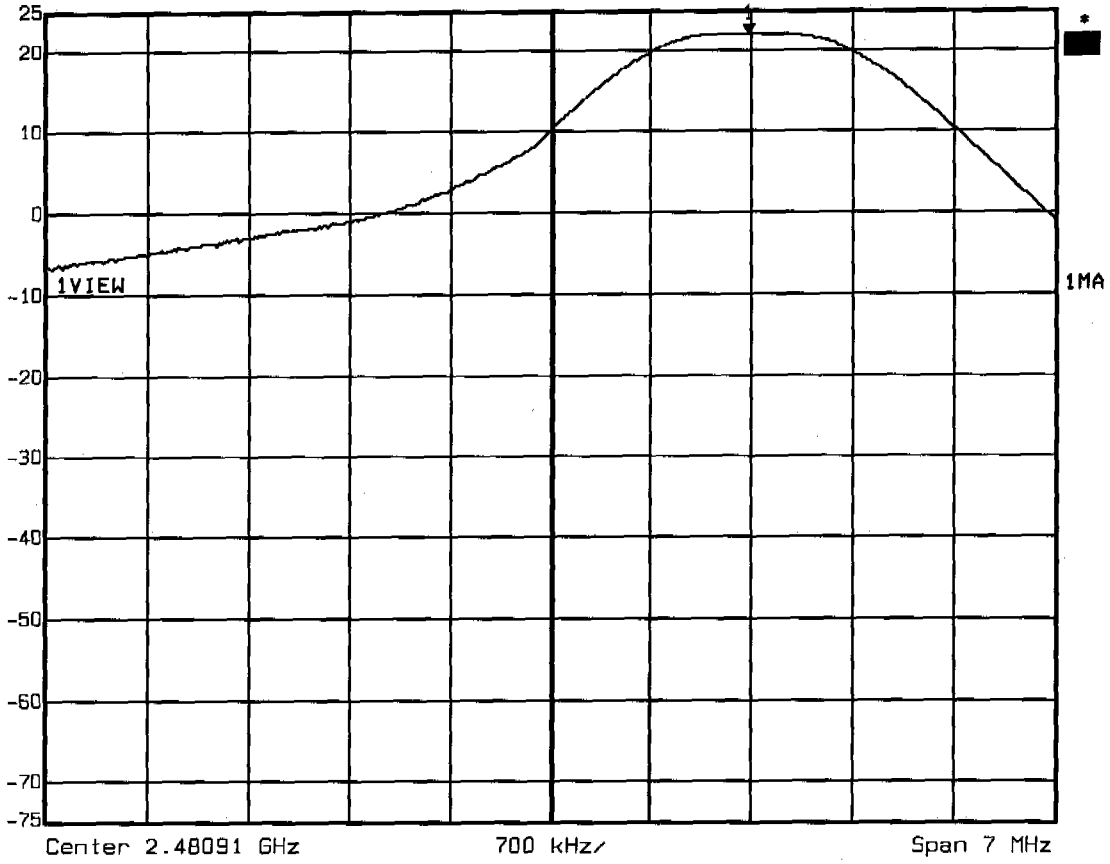

Title: Peak Output Power conducted Ch.: 94  
Comment A: GN Netcom Cordless Headset 264 FCC Base  
Date: 22.MAR.2005 13:37:08


**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 2.400GHz, Pmax: 18.18dBm, RBW: 5MHz

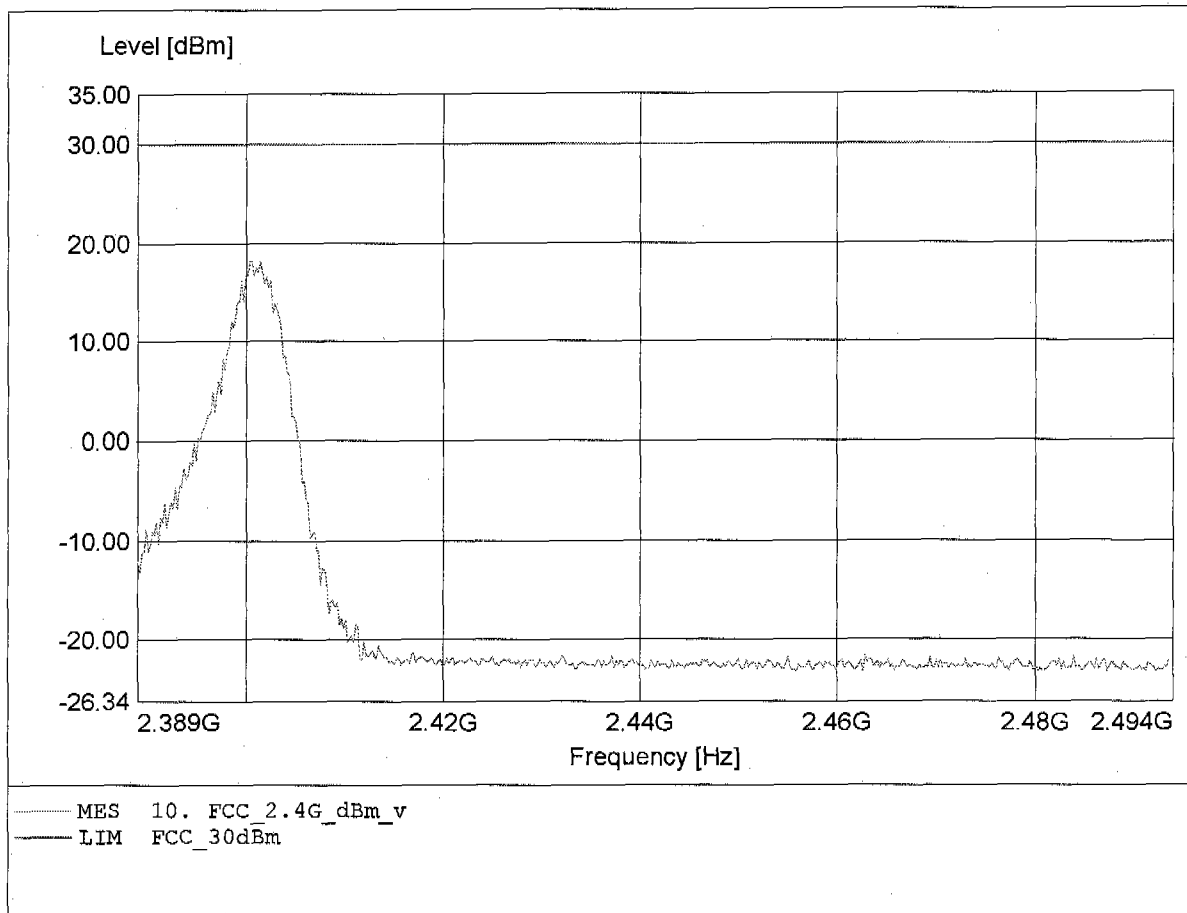


**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 2.401GHz, Pmax: 17.24dBm, RBW: 5MHz

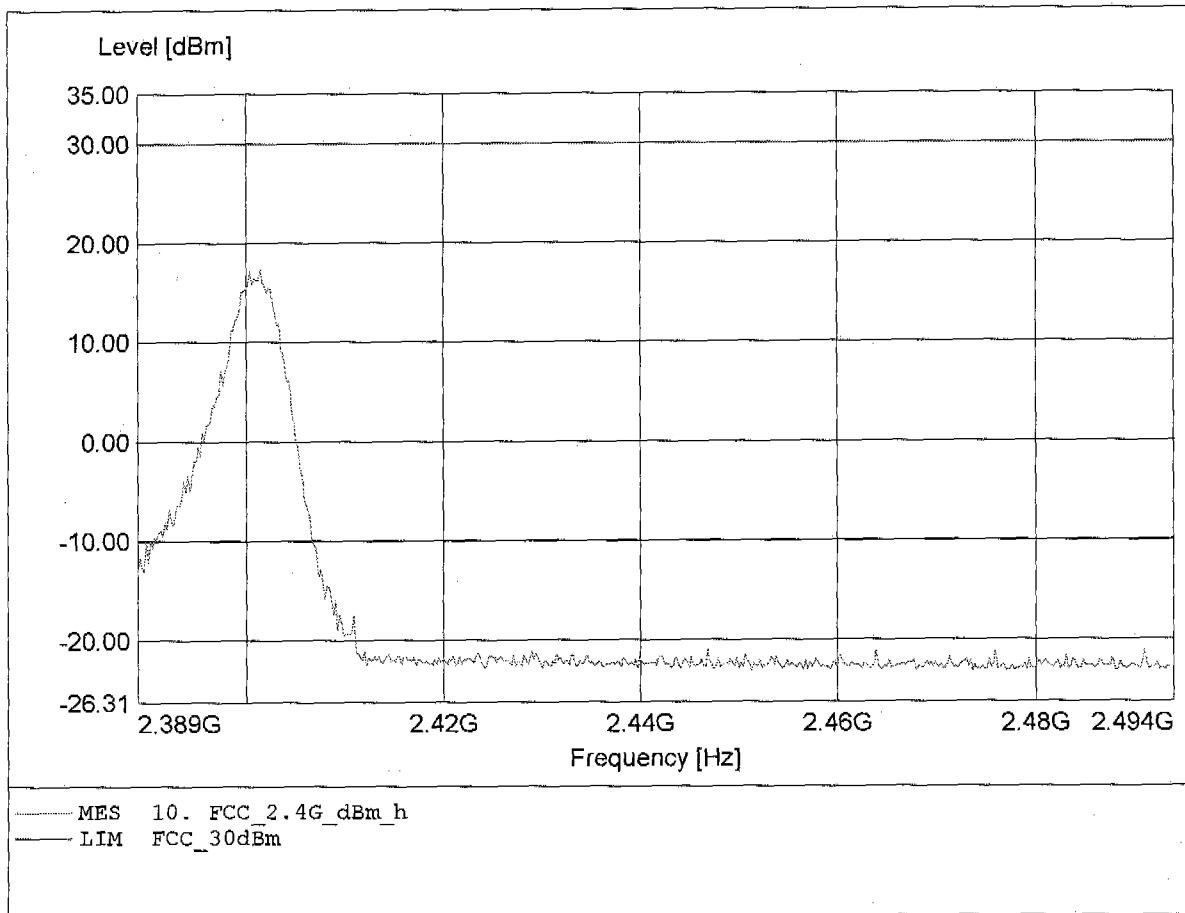


**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 47 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 2.441GHz, Pmax: 18.51dBm, RBW: 5MHz

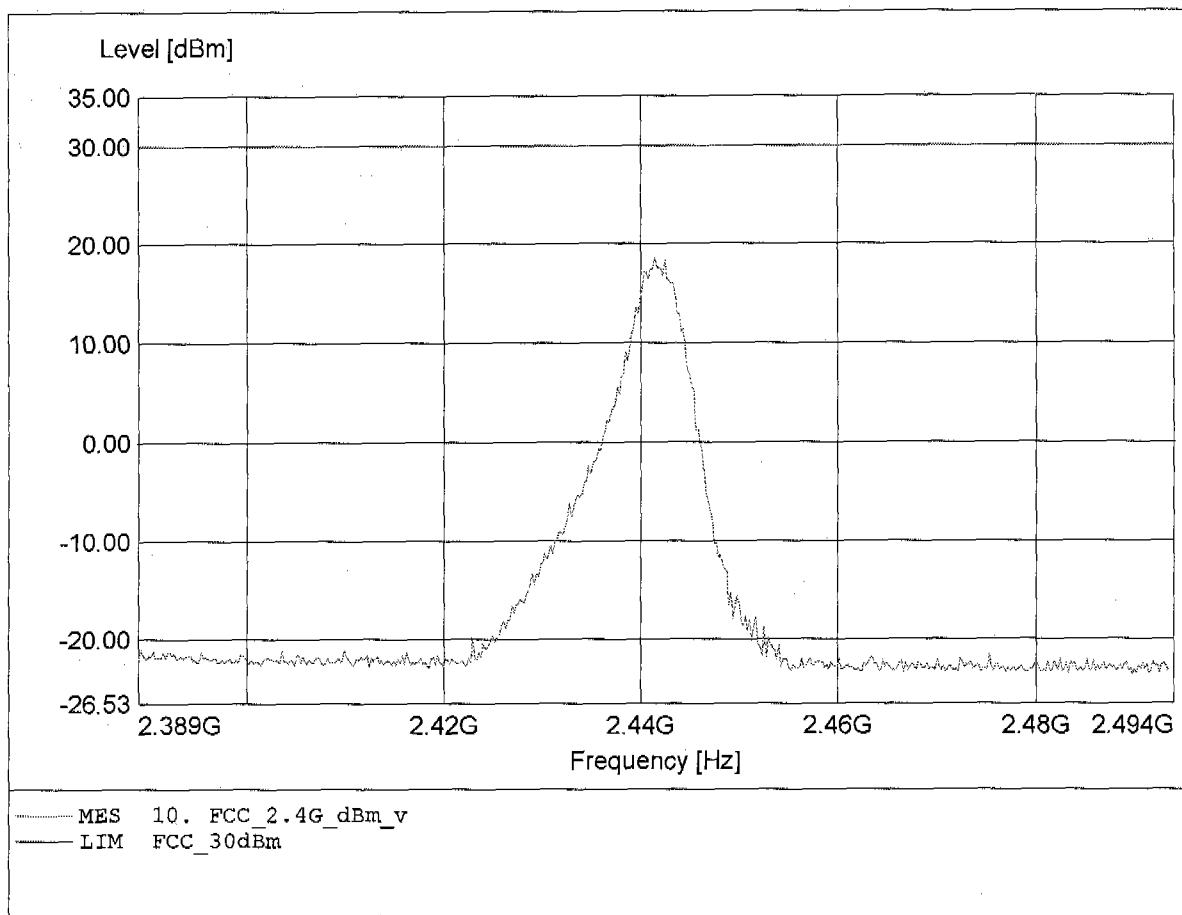

**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**


Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 47 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 2.441GHz, Pmax: 17.90dBm, RBW: 5MHz

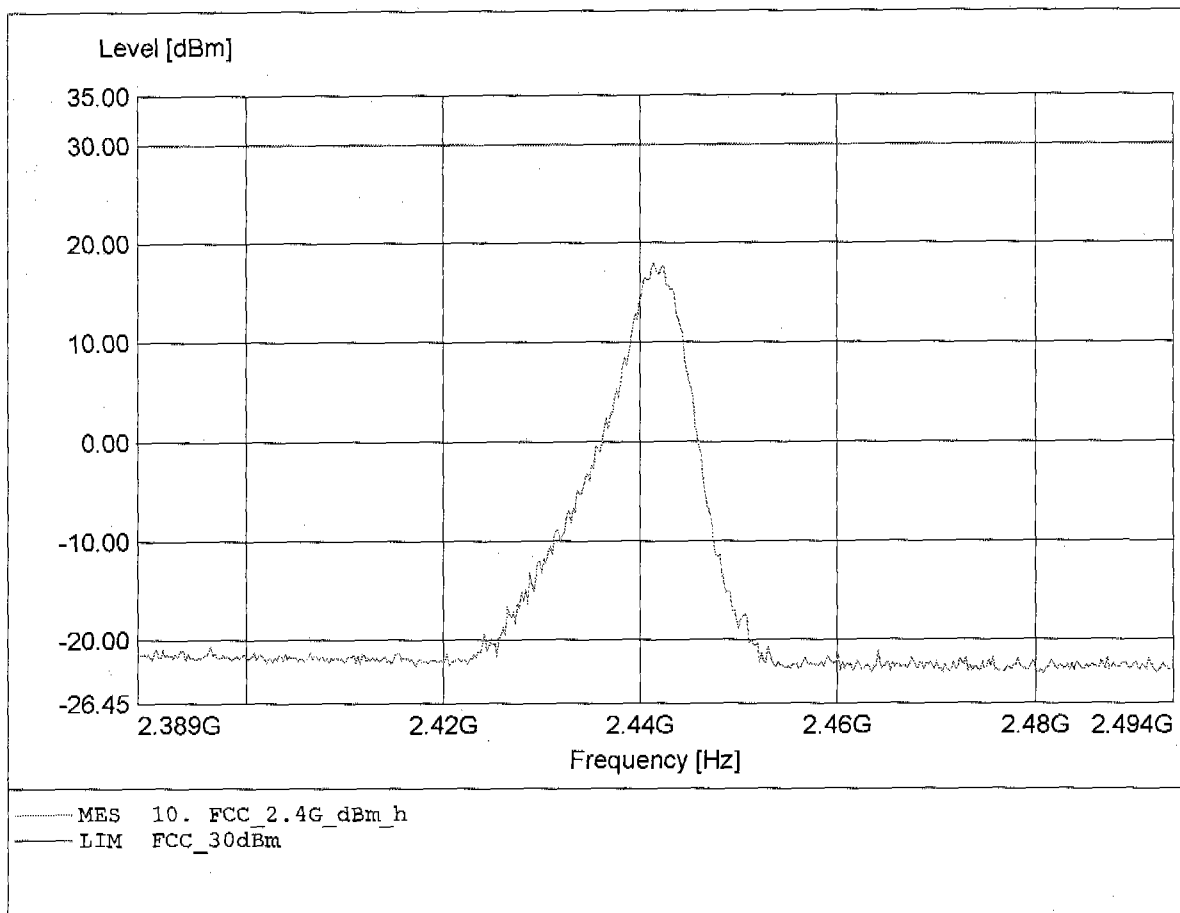




**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to S15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 2.483GHz, Pmax: 19.64dBm, RBW: 5MHz

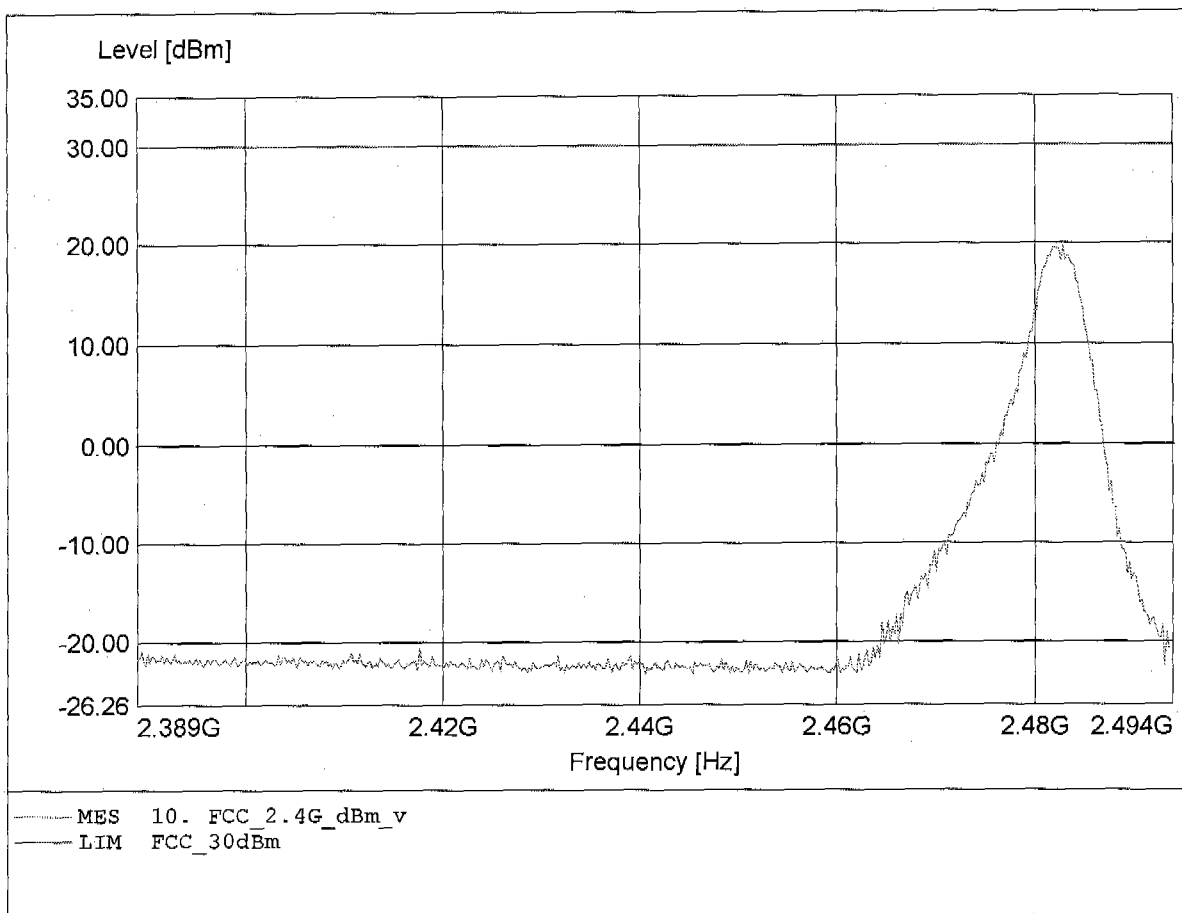


**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 2.483GHz, Pmax: 15.36dBm, RBW: 5MHz

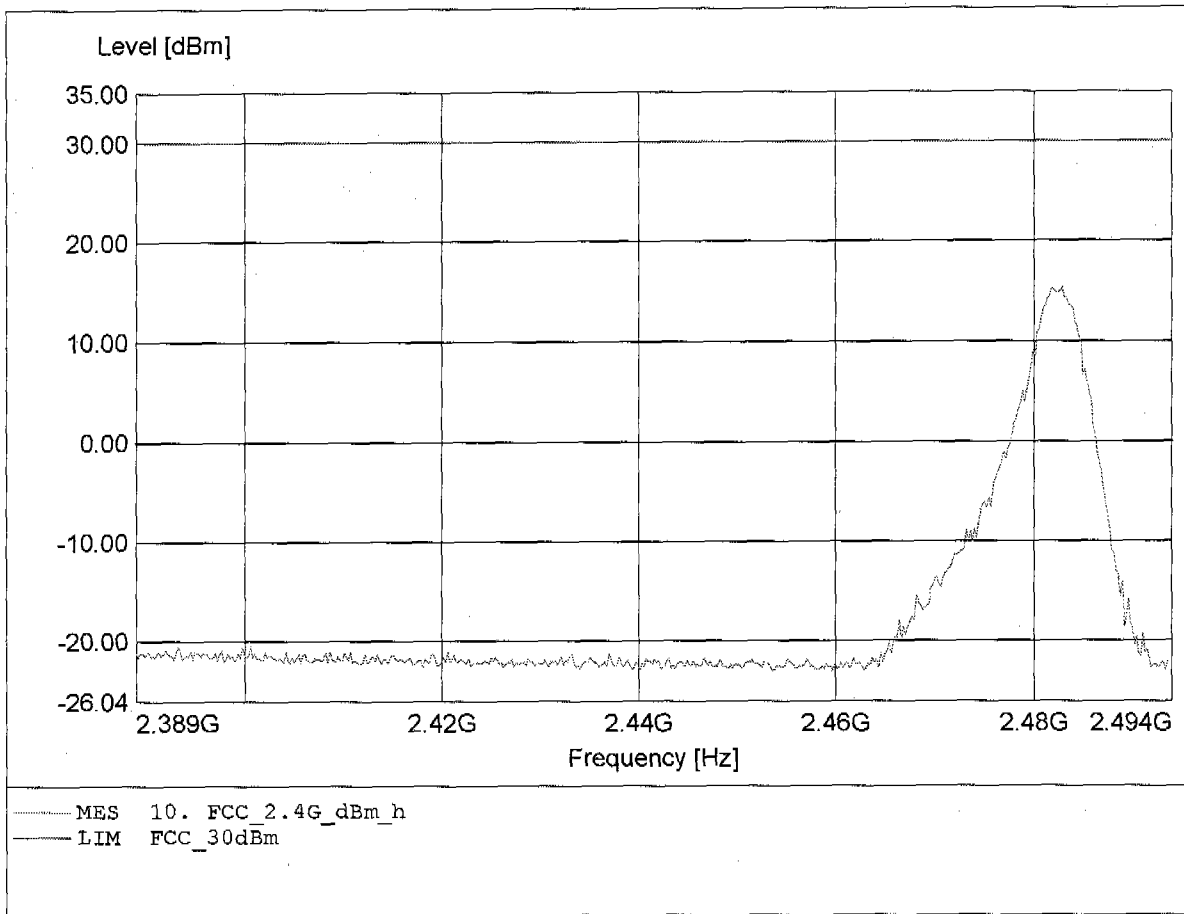


**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Umax.: 138 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 2.401GHz, Pmax: 17.70dBm, RBW: 5MHz

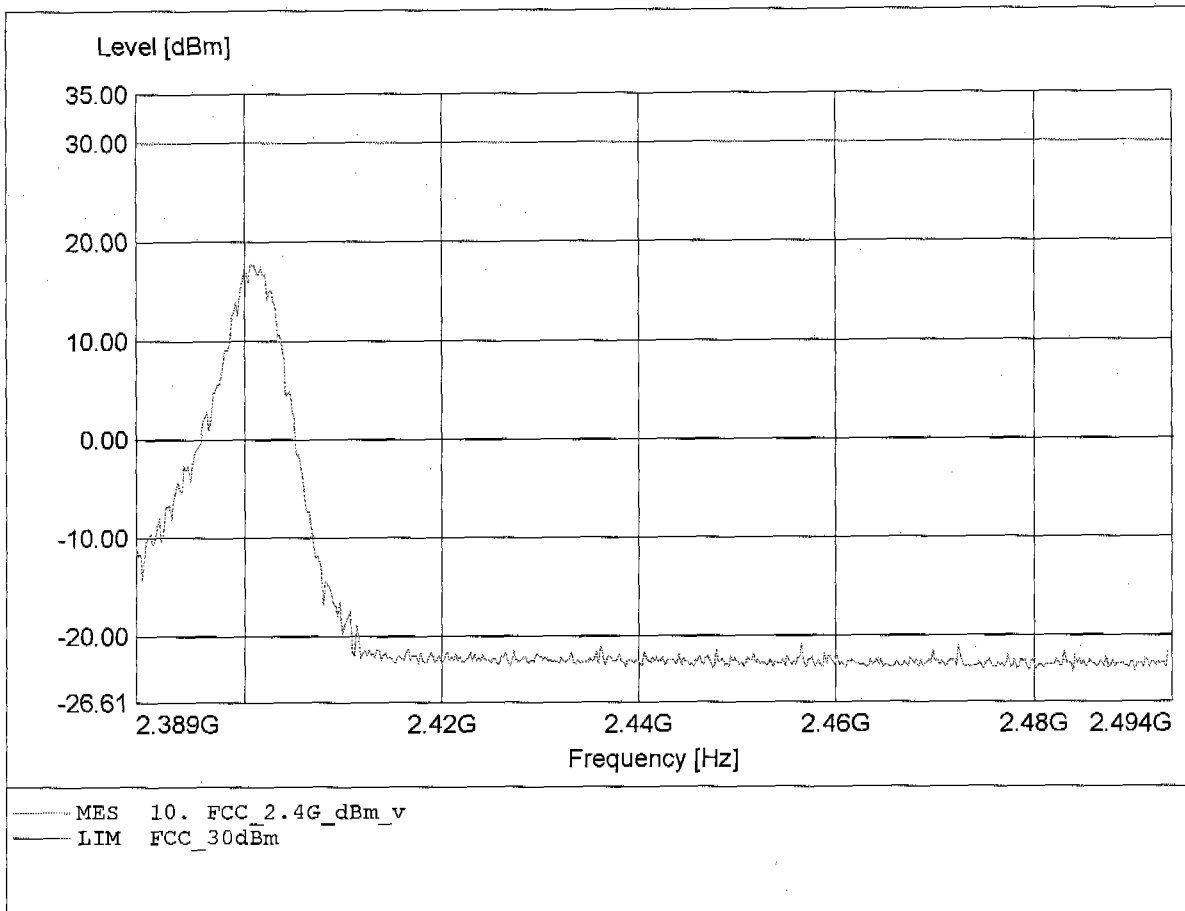


**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Umax.: 138 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 2.401GHz, Pmax: 17.27dBm, RBW: 5MHz

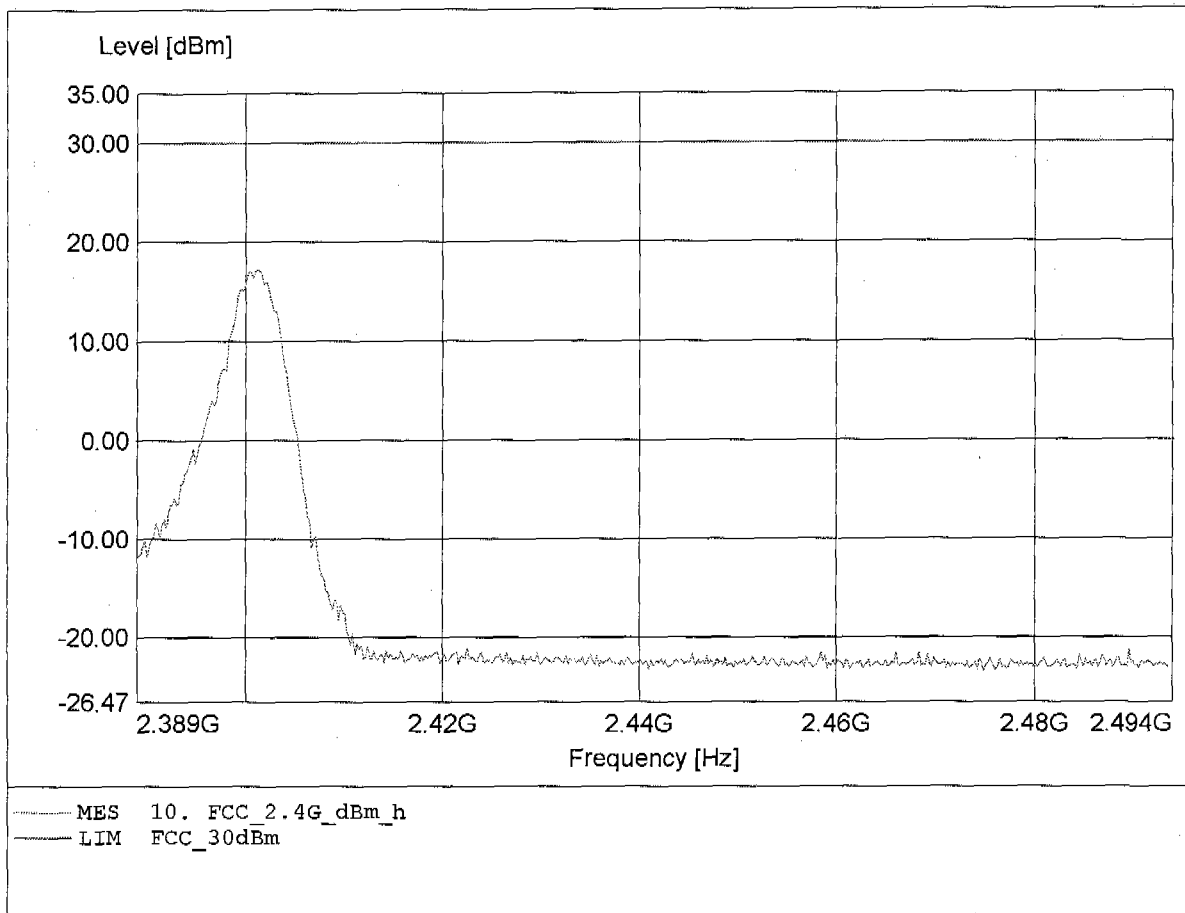


**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 47 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Umax.: 138 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 2.441GHz, Pmax: 19.08dBm, RBW: 5MHz

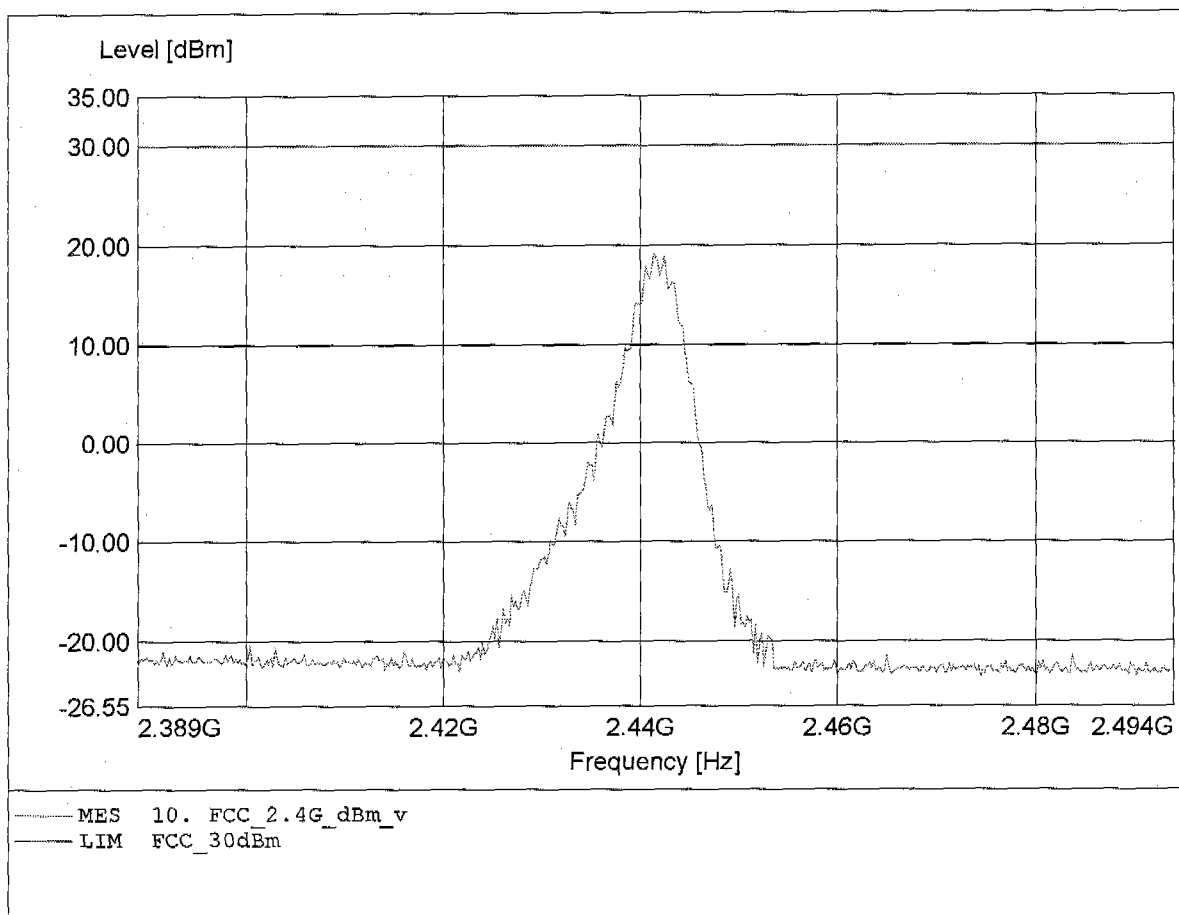


**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 47 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Umax.: 138 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 2.442GHz, Pmax: 17.92dBm, RBW: 5MHz

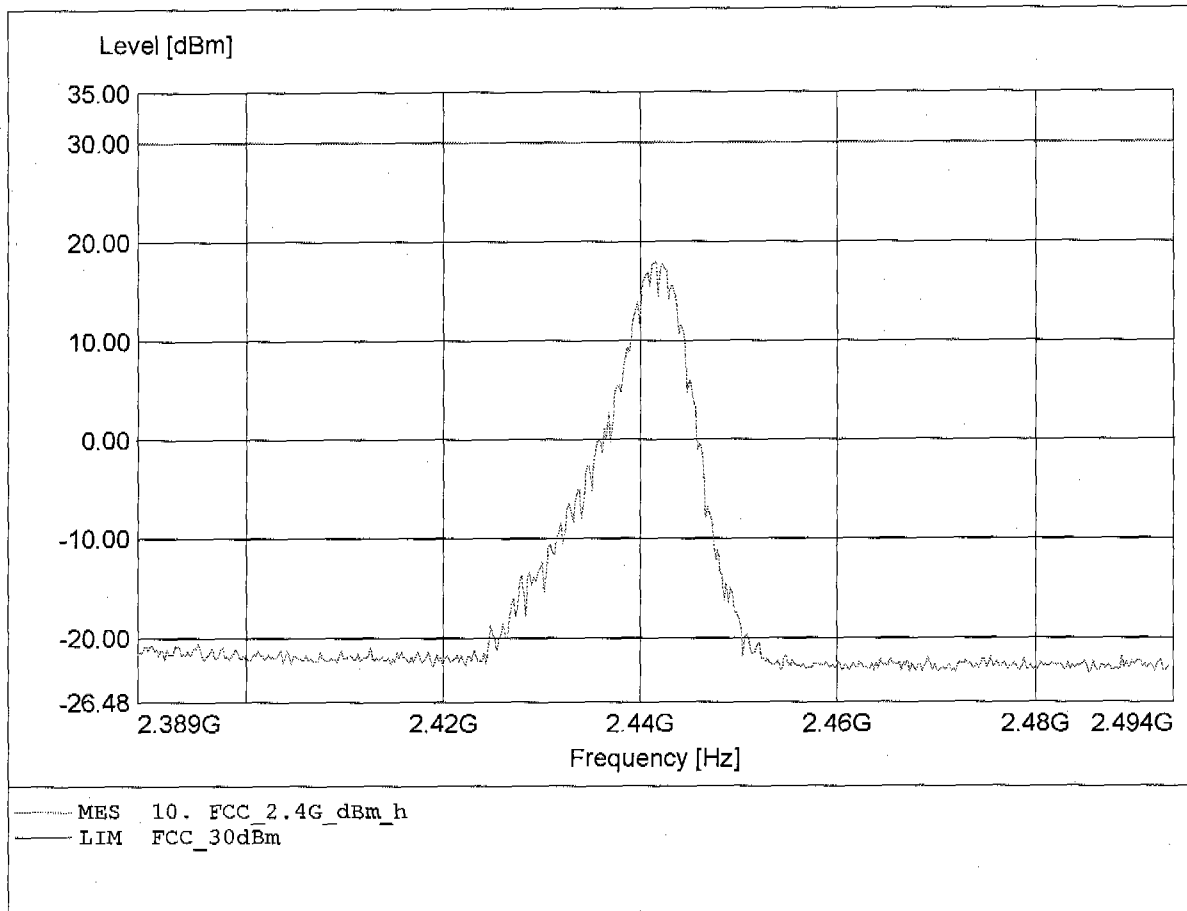


**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 94 / Ant.: 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Umax.: 138 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 2.482GHz, Pmax: 19.44dBm, RBW: 5MHz

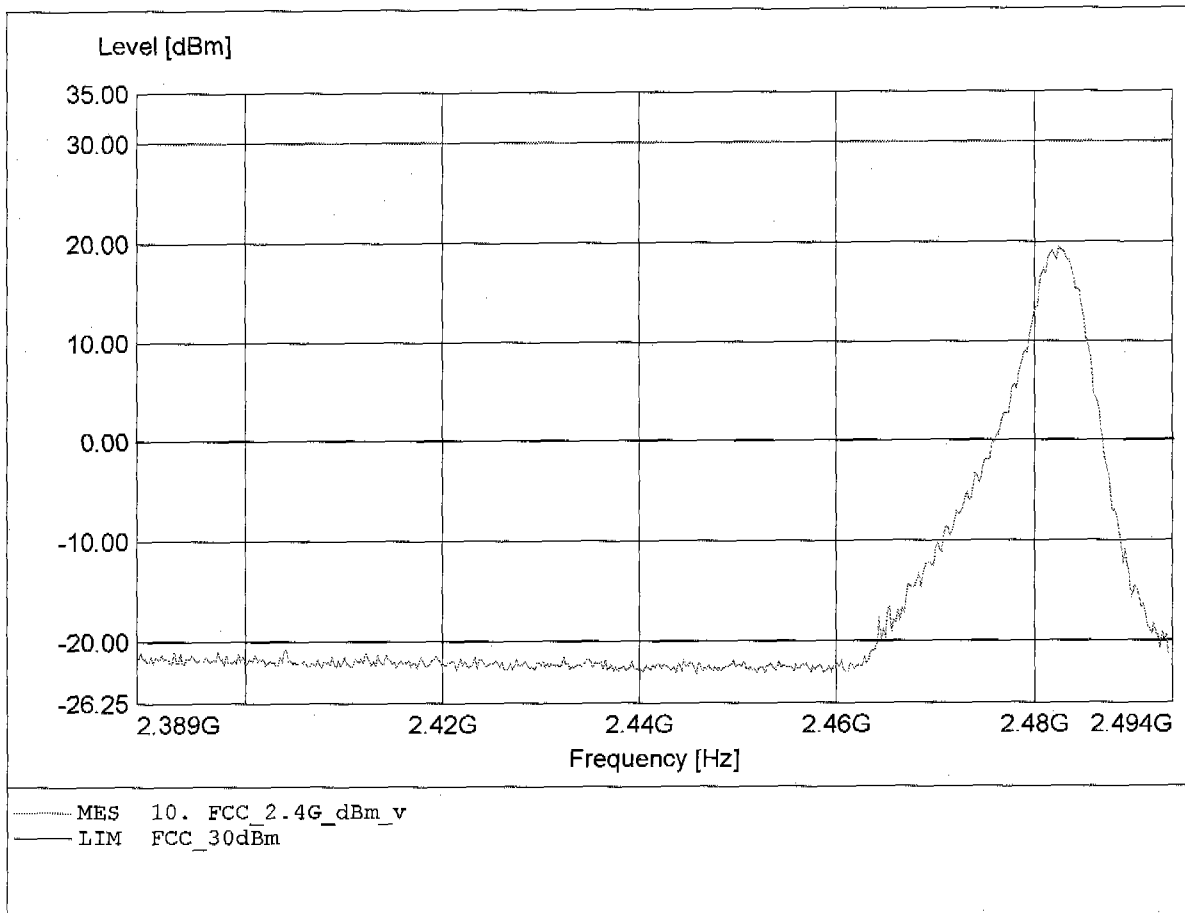

**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**


Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Umax.: 138 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 2.482GHz, Pmax: 15.37dBm, RBW: 5MHz

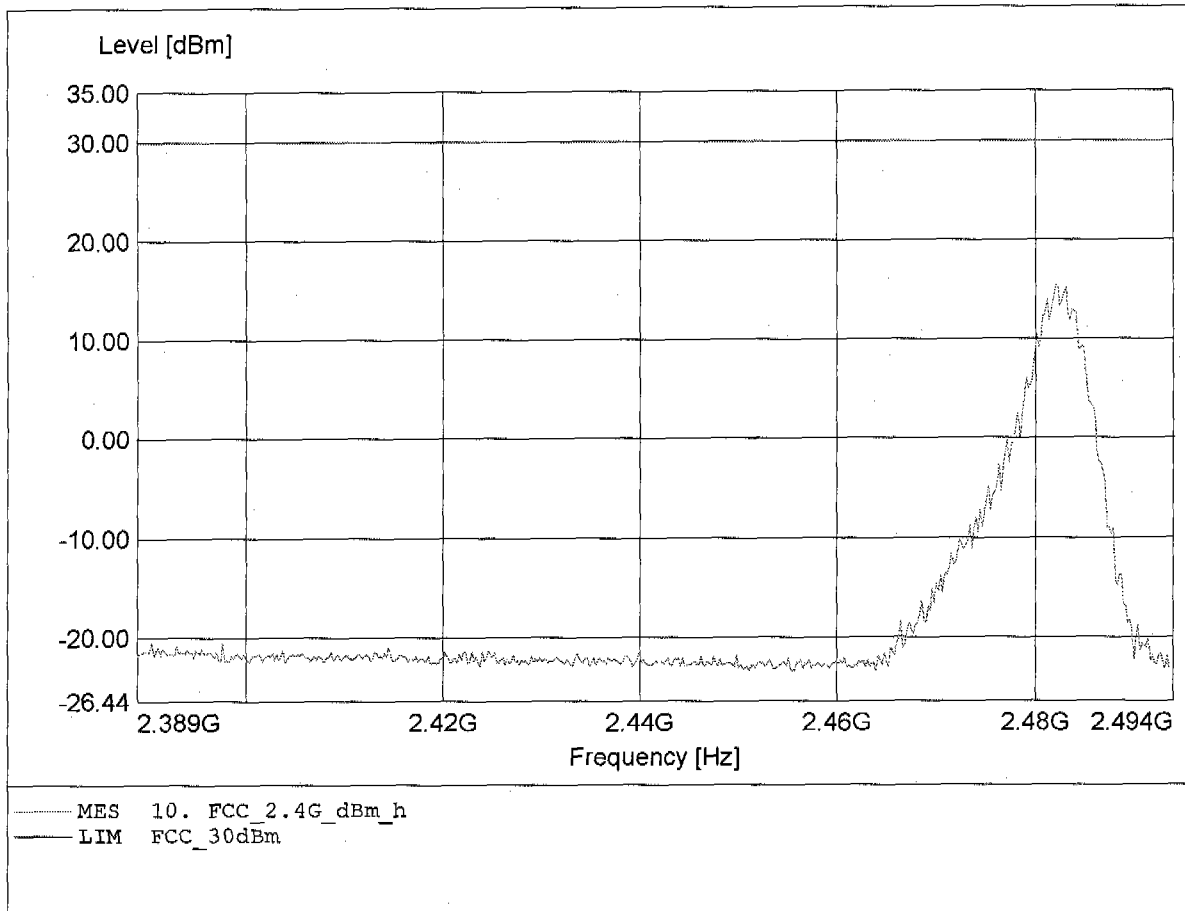




**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Umin.: 102 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 2.401GHz, Pmax: 17.92dBm, RBW: 5MHz

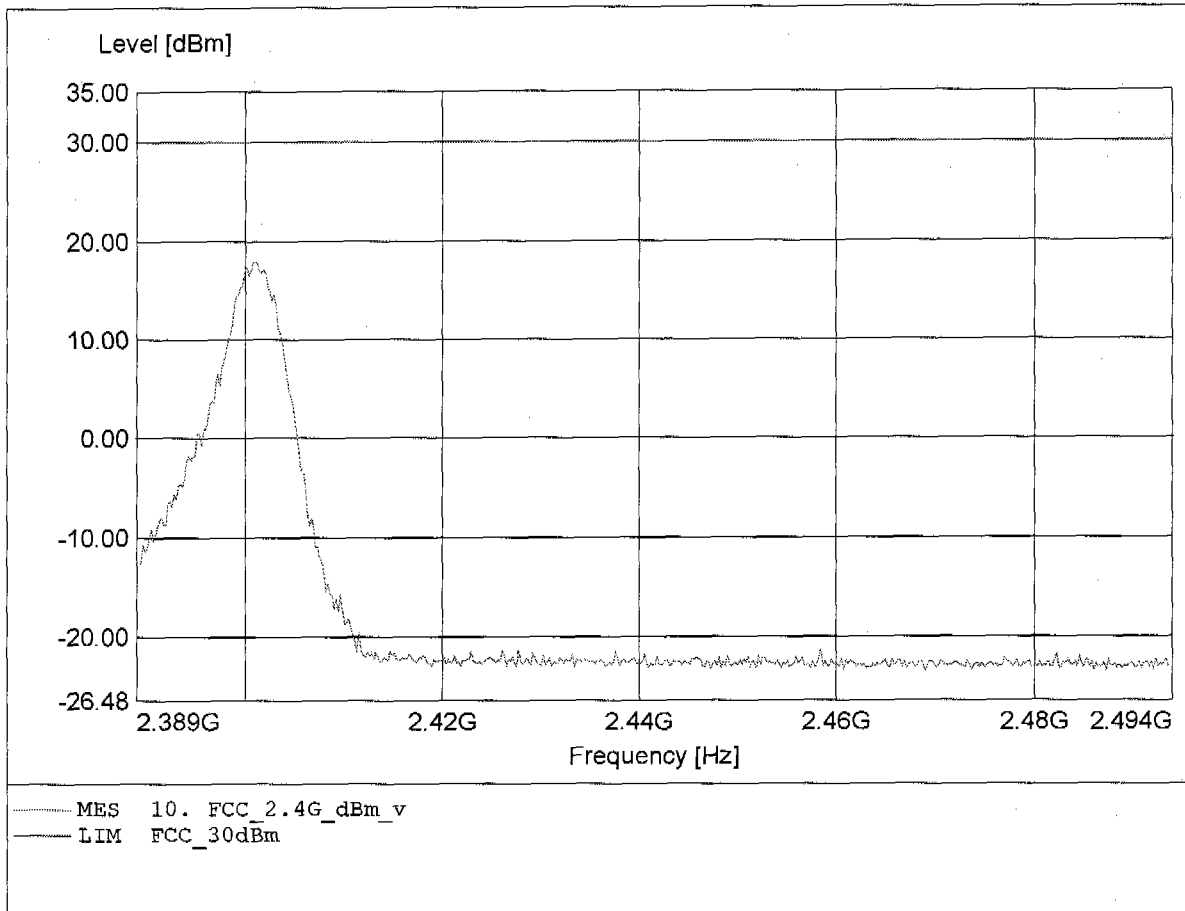


**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 0 / Ant.: 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Umin.: 102 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 2.401GHz, Pmax: 17.26dBm, RBW: 5MHz

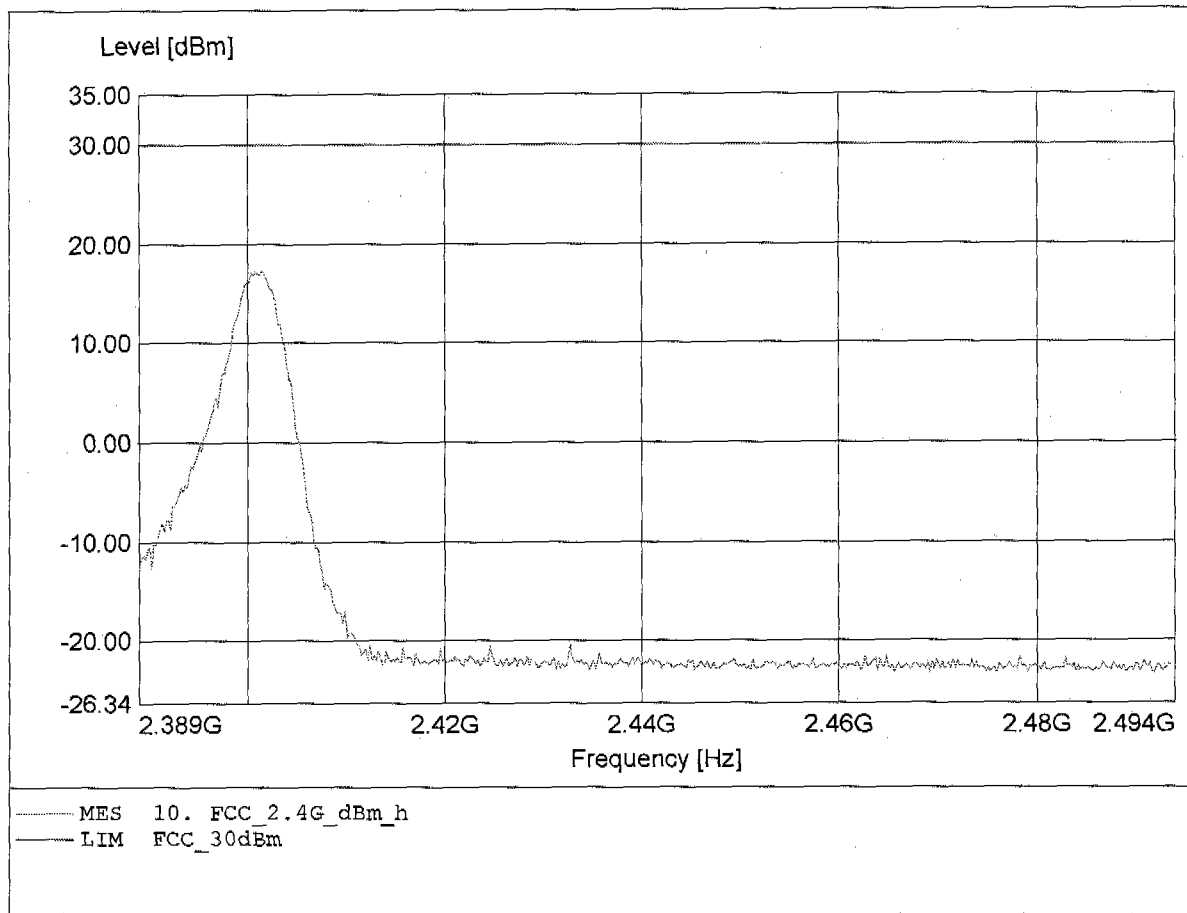


**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 47 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Umin.: 102 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 2.442GHz, Pmax: 18.86dBm, RBW: 5MHz

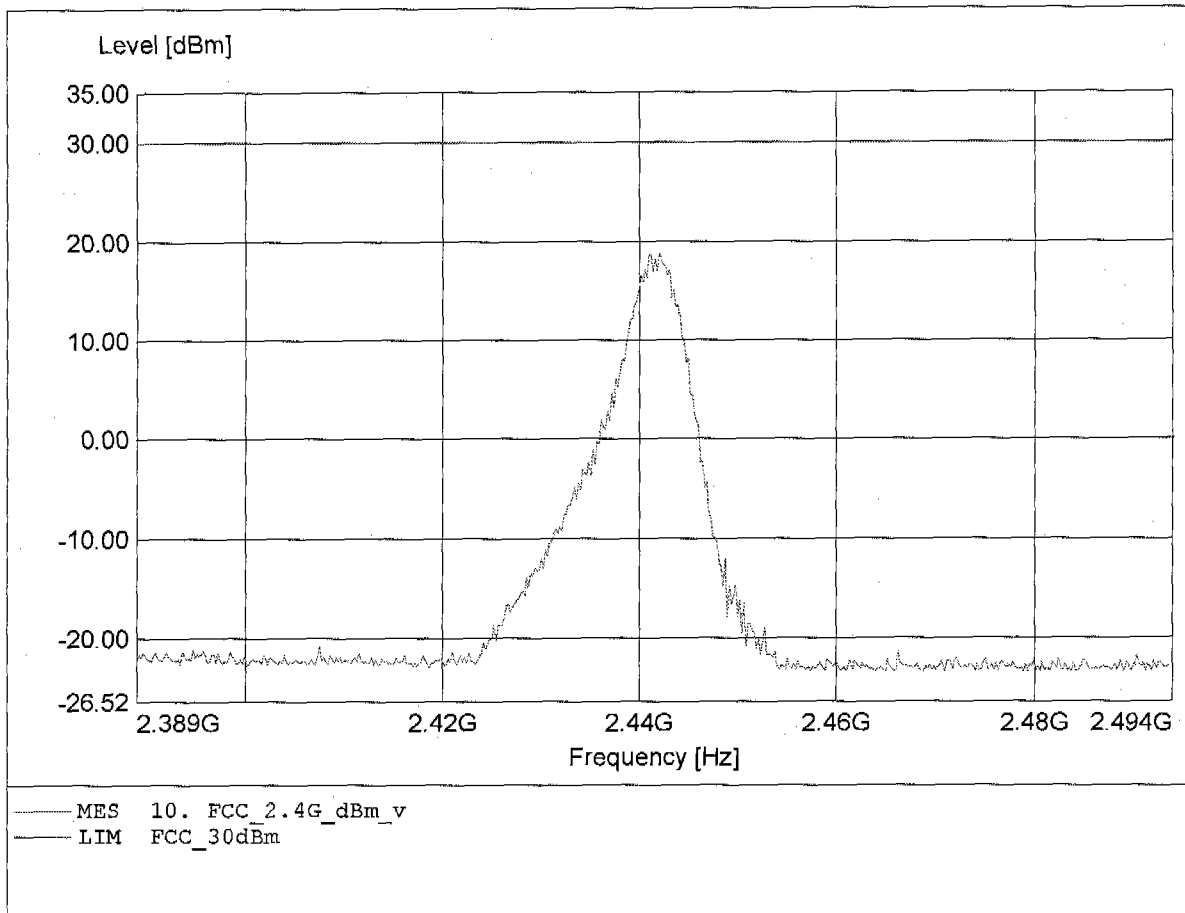


**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 47 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Umin.: 102 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to S15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 2.442GHz, Pmax: 18.28dBm, RBW: 5MHz

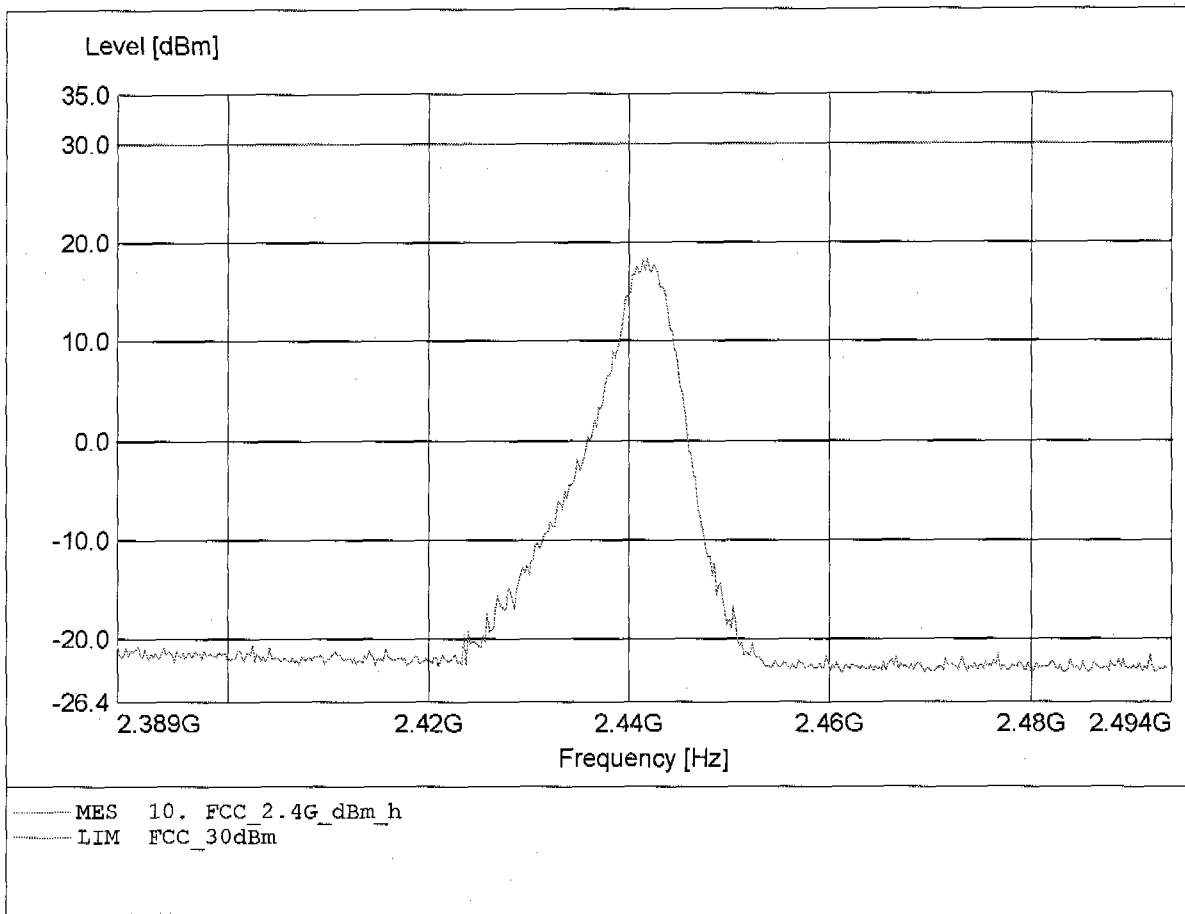


Carrier power (dBm)  
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Umin.: 102 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to S15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 2.483GHz, Pmax: 19.26dBm, RBW: 5MHz

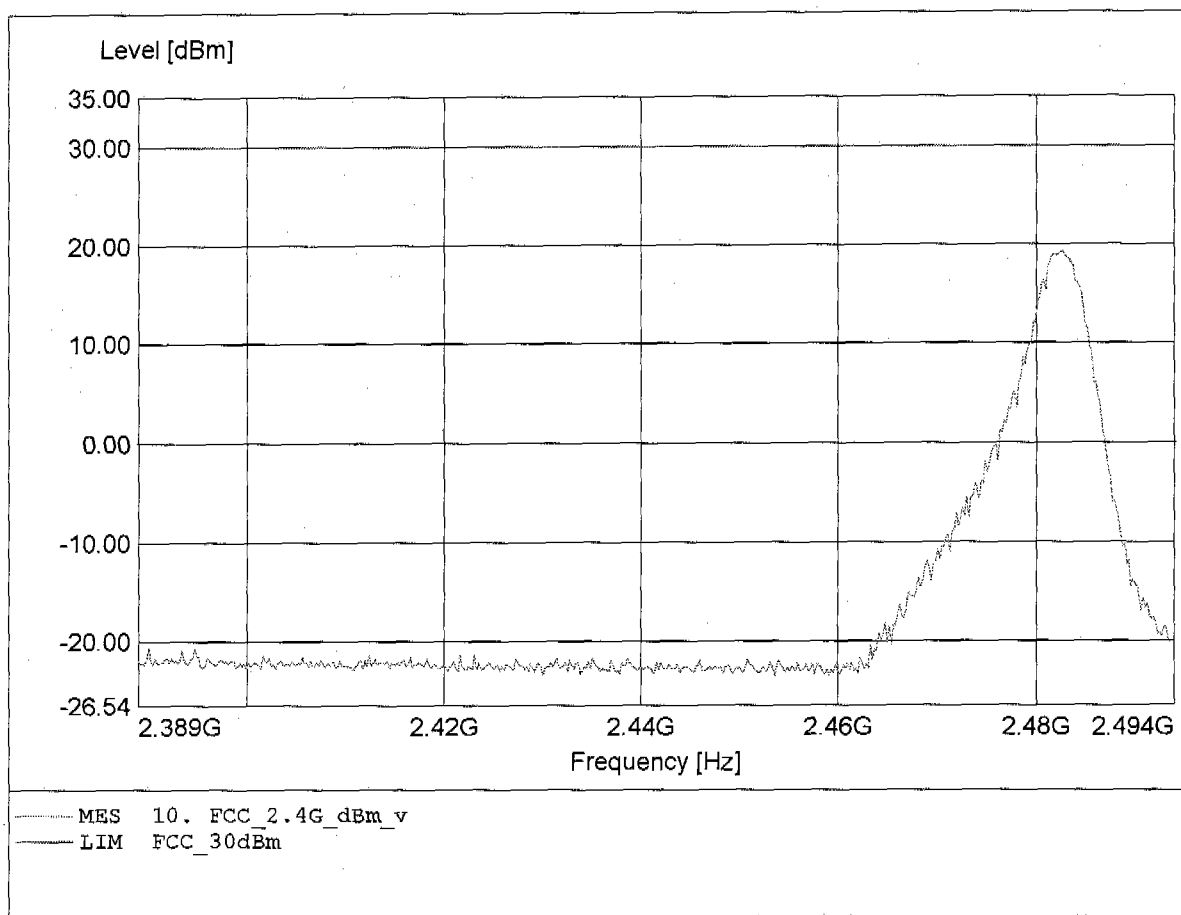


Carrier power (dBm)  
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Umin.: 102 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 2.482GHz, Pmax: 15.37dBm, RBW: 5MHz

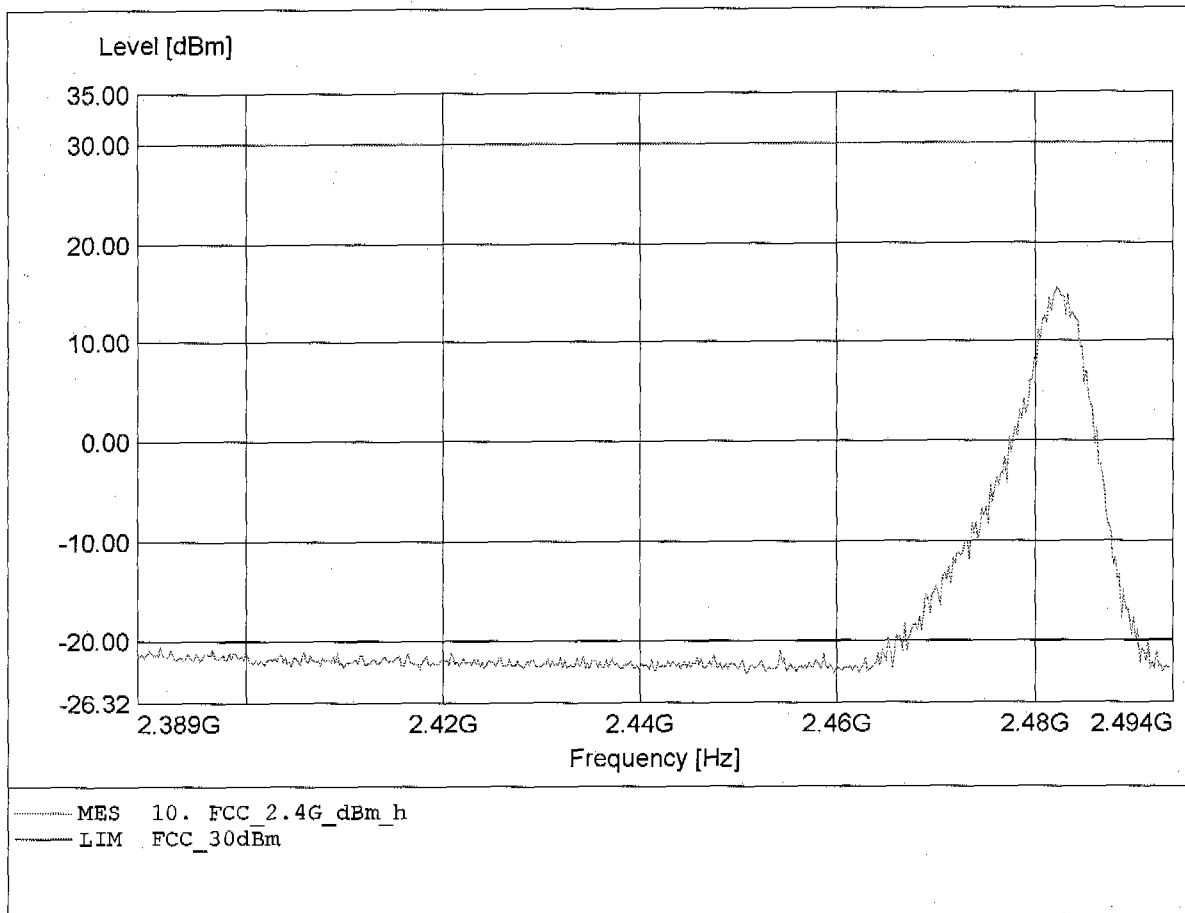


**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 2  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 2.401GHz, Pmax: 17.87dBm, RBW: 5MHz

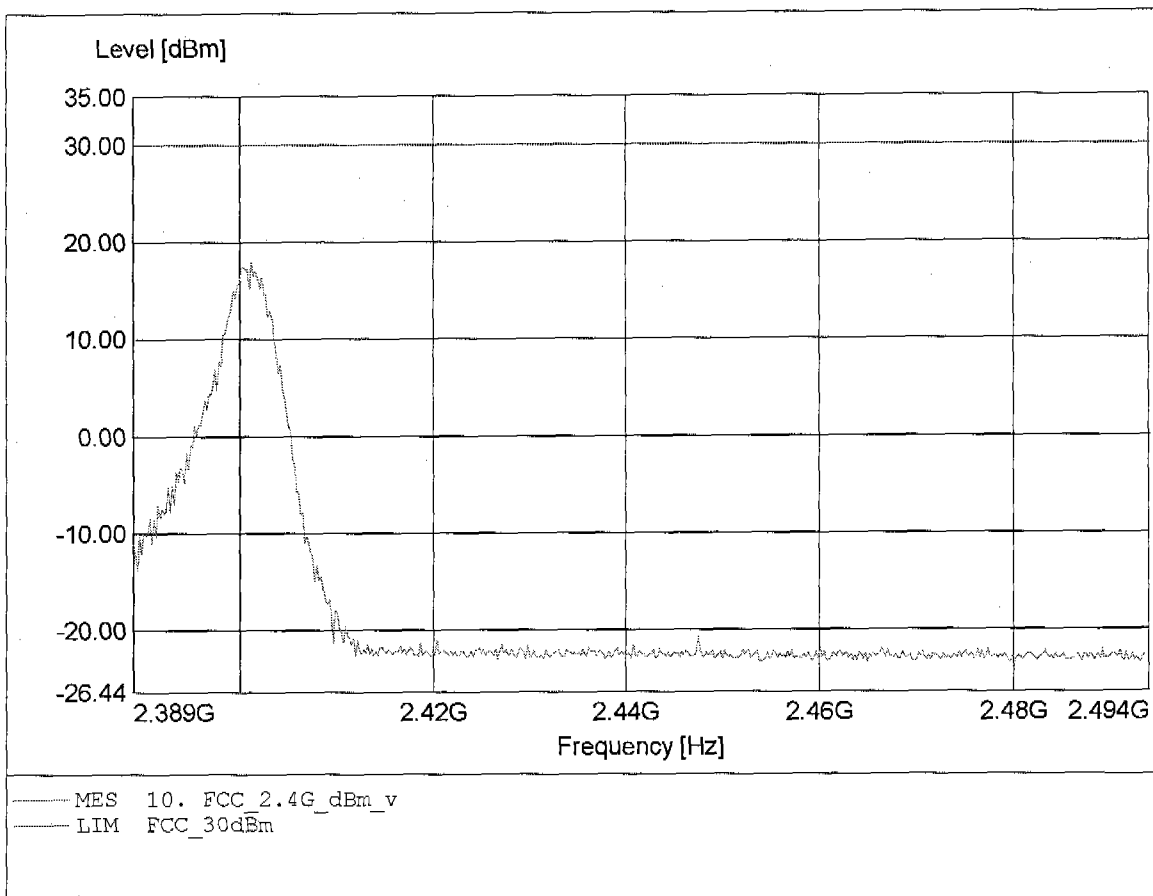

**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**


Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 2  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 2.400GHz, Pmax: 17.26dBm, RBW: 5MHz

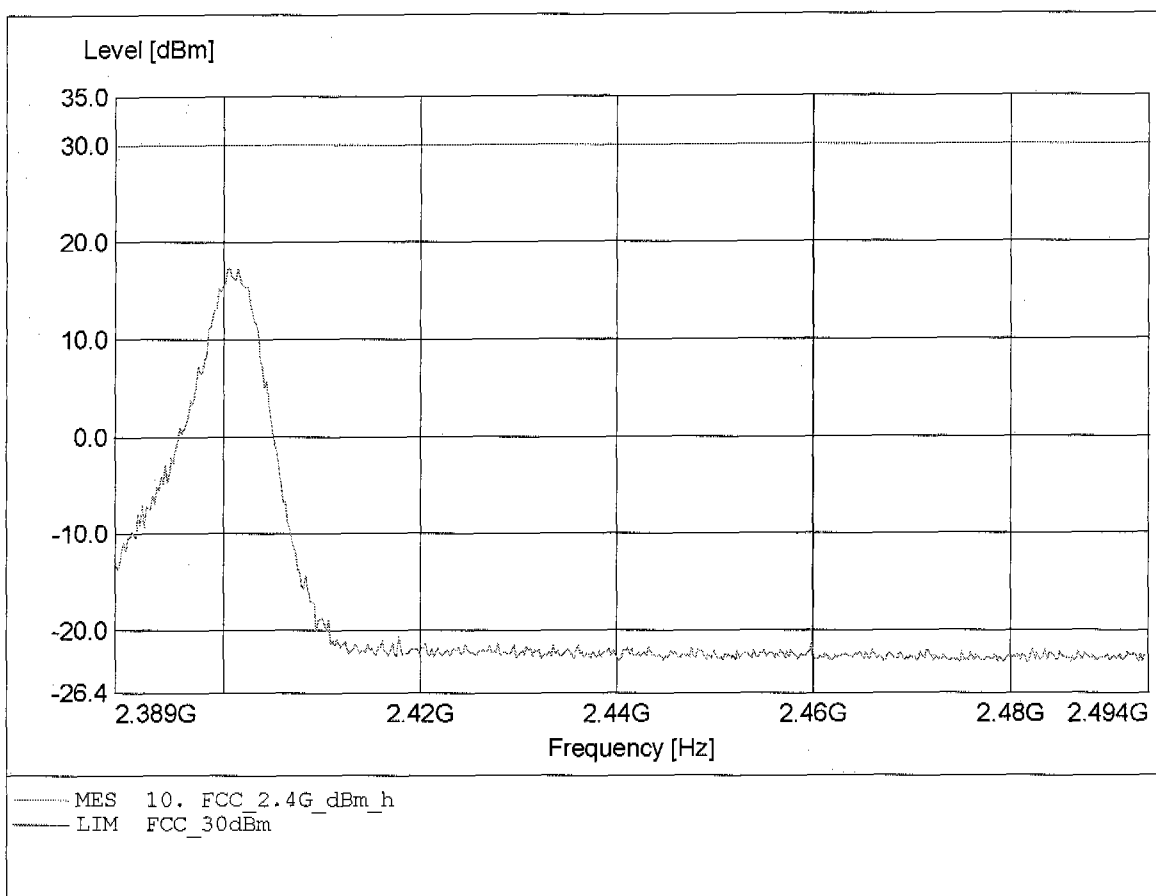




**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 47 / Ant. 2  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 2.442GHz, Pmax: 18.26dBm, RBW: 5MHz

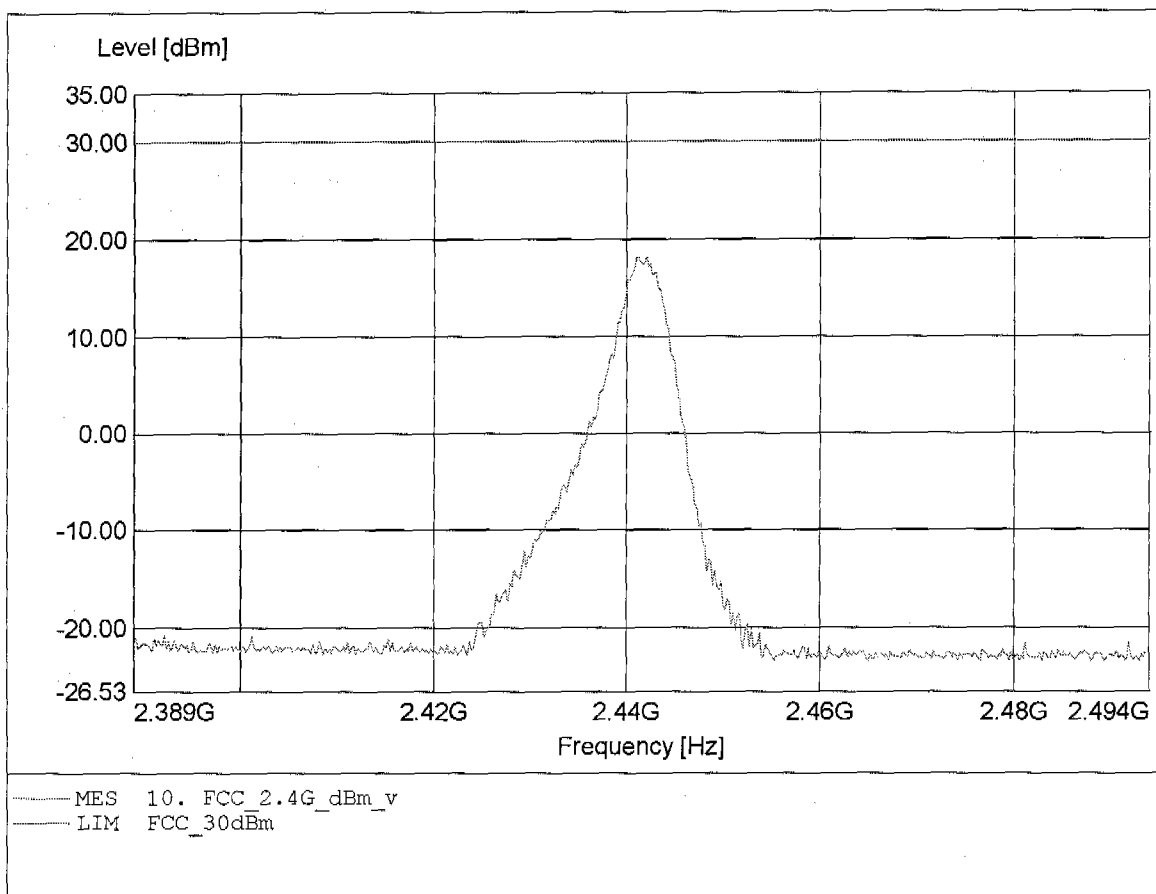


**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 47 / Ant. 2  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 2.442GHz, Pmax: 17.73dBm, RBW: 5MHz

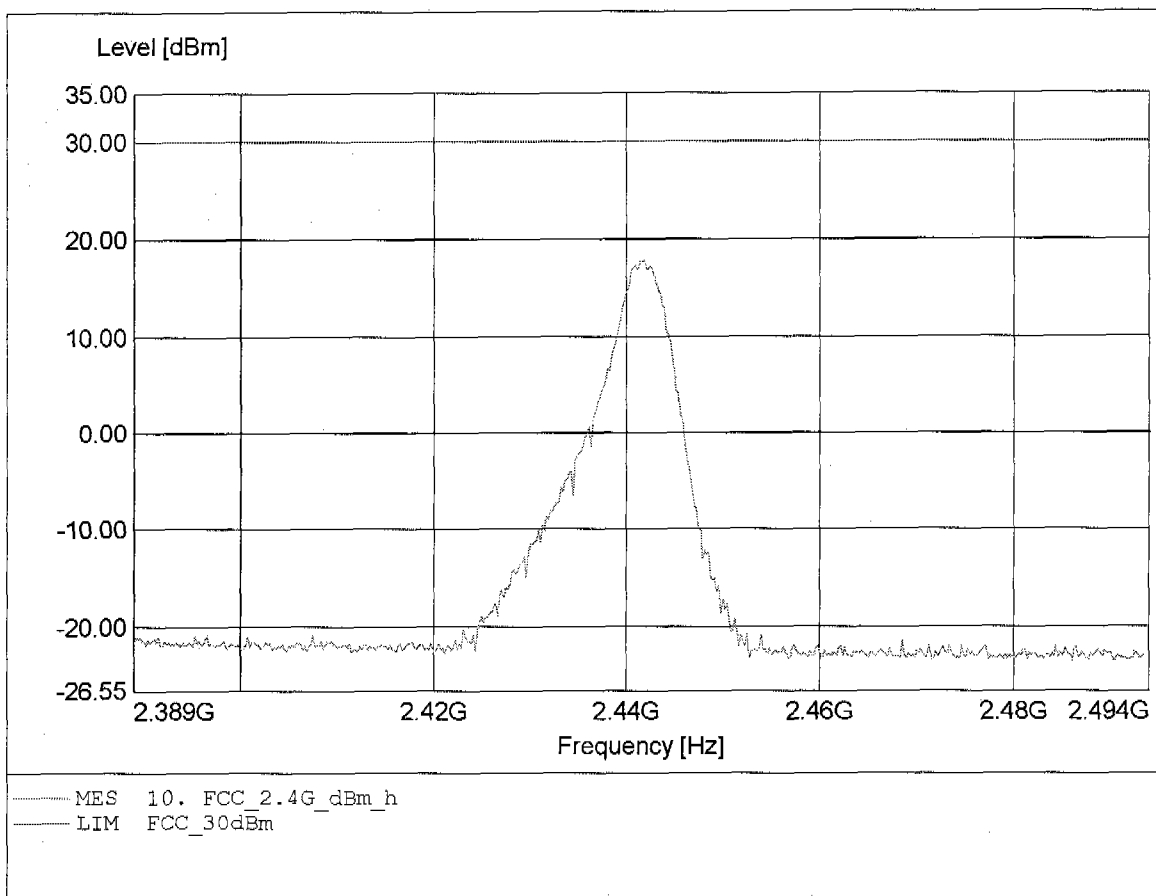


**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 2  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 2.482GHz, Pmax: 19.66dBm, RBW: 5MHz

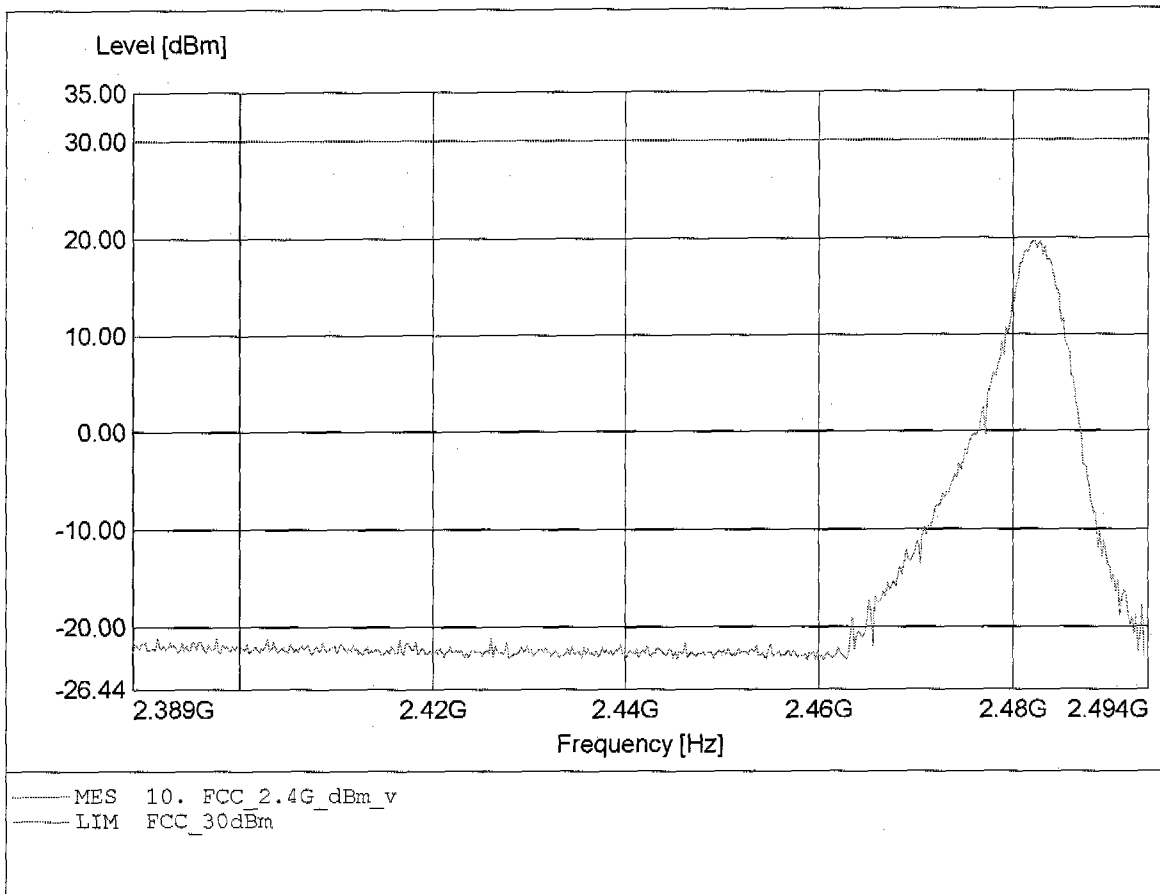


**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 2  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 2.482GHz, Pmax: 15.30dBm, RBW: 5MHz

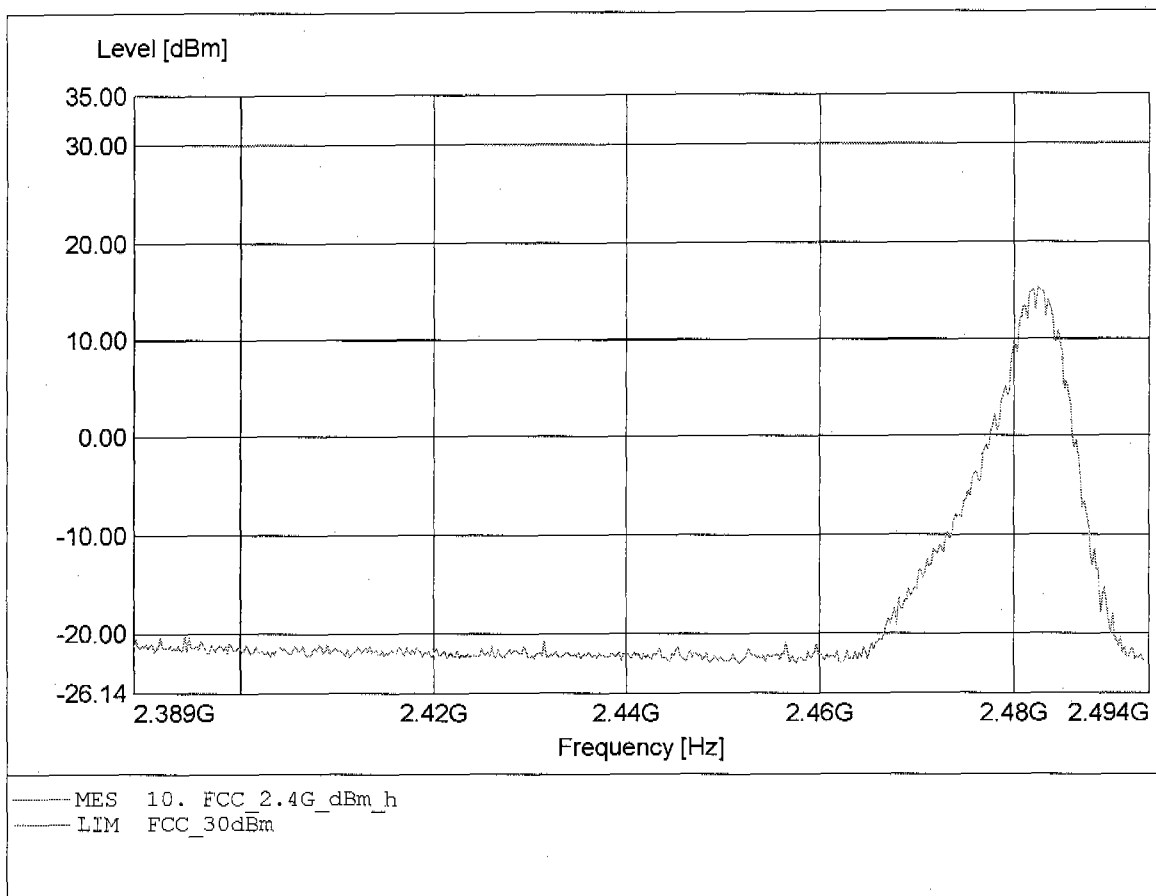


**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 2  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Umax.: 138 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 2.401GHz, Pmax: 17.69dBm, RBW: 5MHz

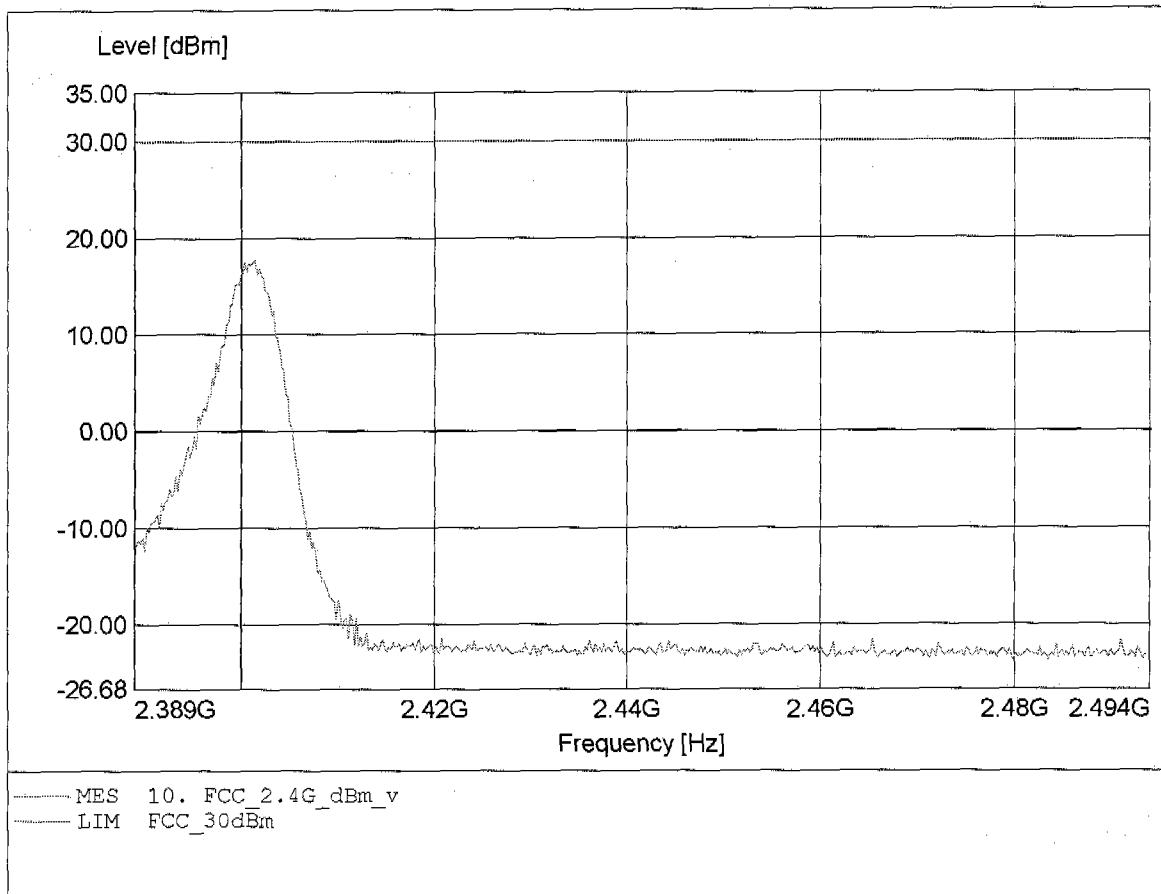


**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 2  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Umax.: 138 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 2.401GHz, Pmax: 17.32dBm, RBW: 5MHz

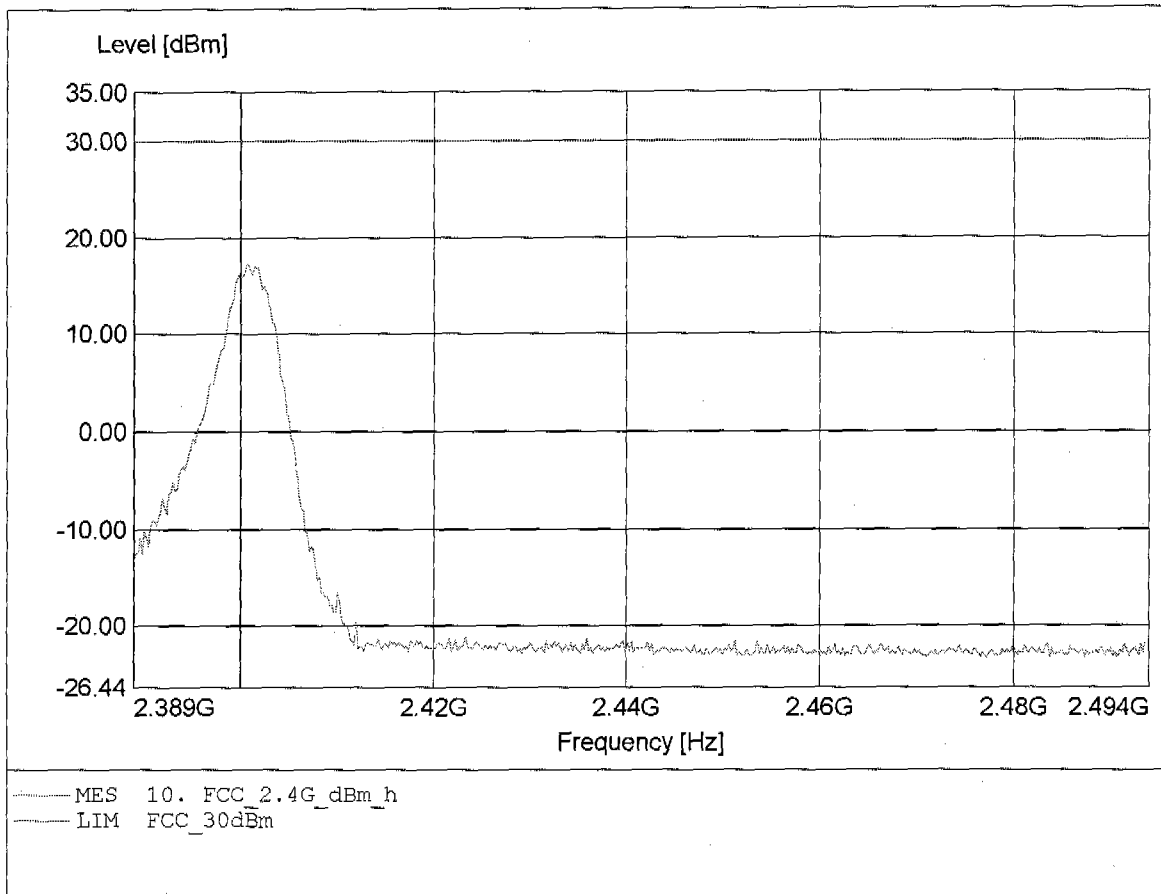


**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 47 / Ant. 2  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Umax.: 138 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 2.442GHz, Pmax: 18.66dBm, RBW: 5MHz

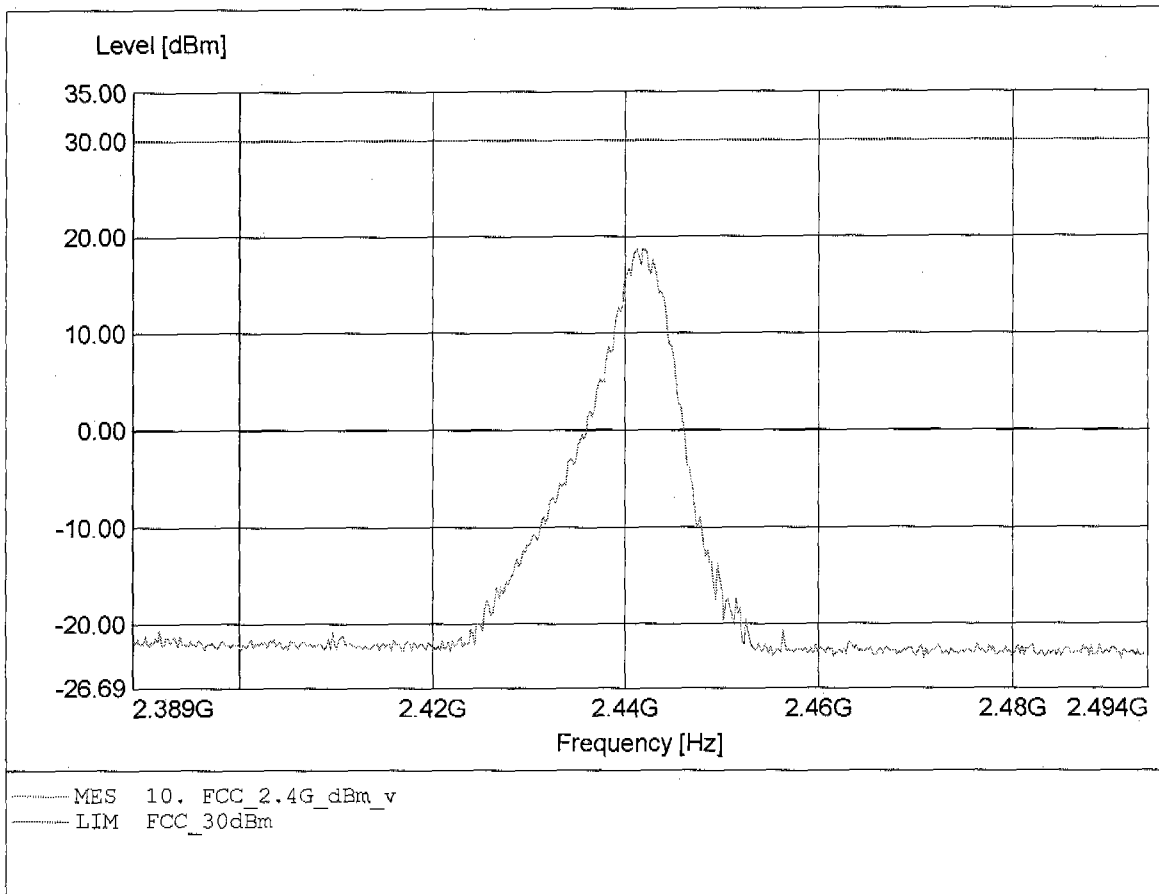

**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**


Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 47 / Ant. 2  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Umax.: 138 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 2.441GHz, Pmax: 18.09dBm, RBW: 5MHz

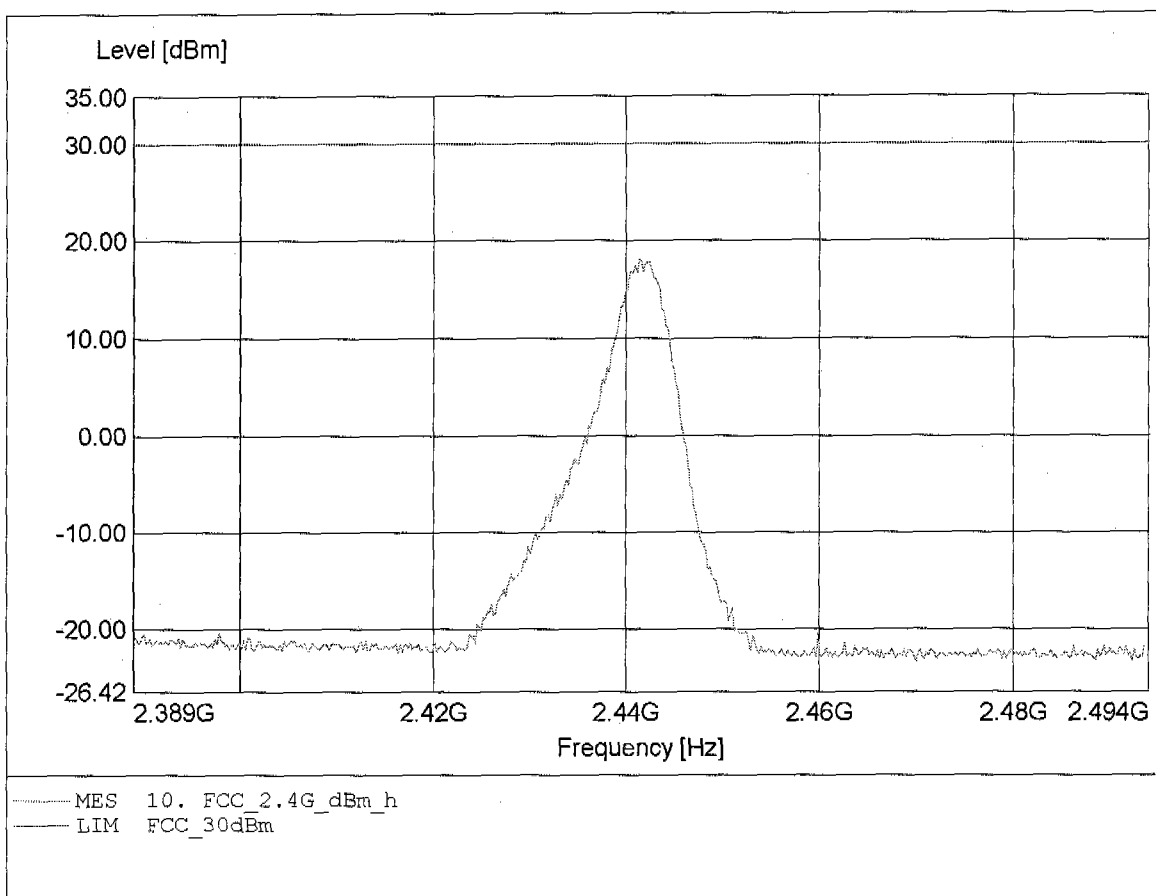




**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 2  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Umax.: 138 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 2.483GHz, Pmax: 19.82dBm, RBW: 5MHz

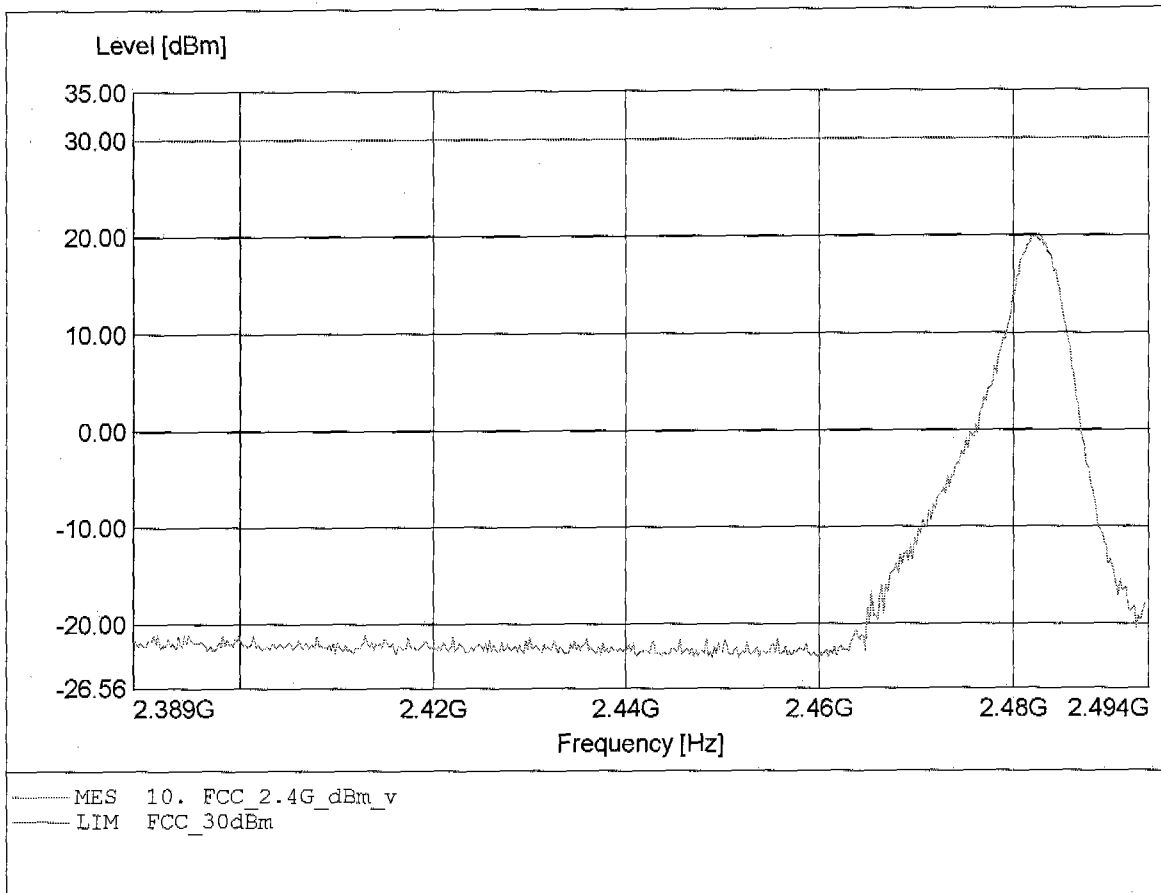


**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 2  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Umax.: 138 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 2.482GHz, Pmax: 15.87dBm, RBW: 5MHz

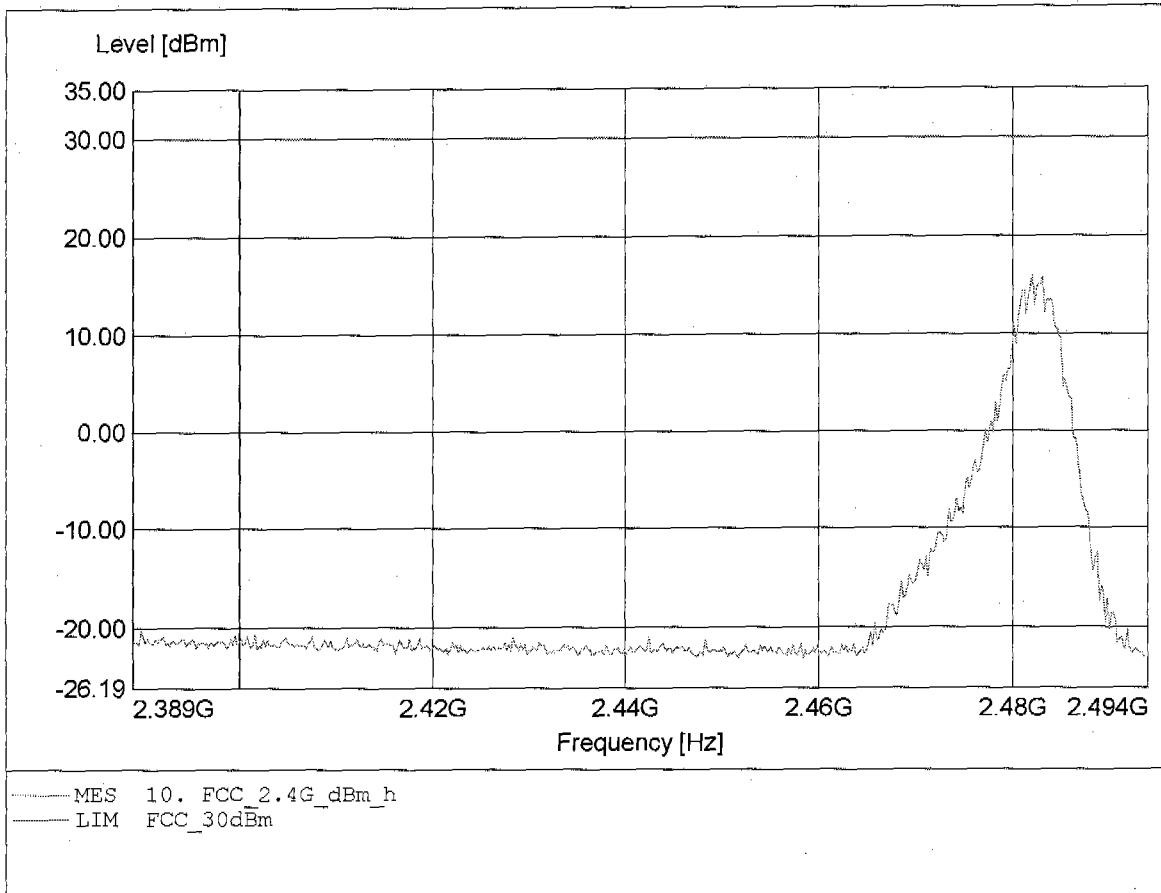


**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 2  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Umin.: 102 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 2.401GHz, Pmax: 17.57dBm, RBW: 5MHz

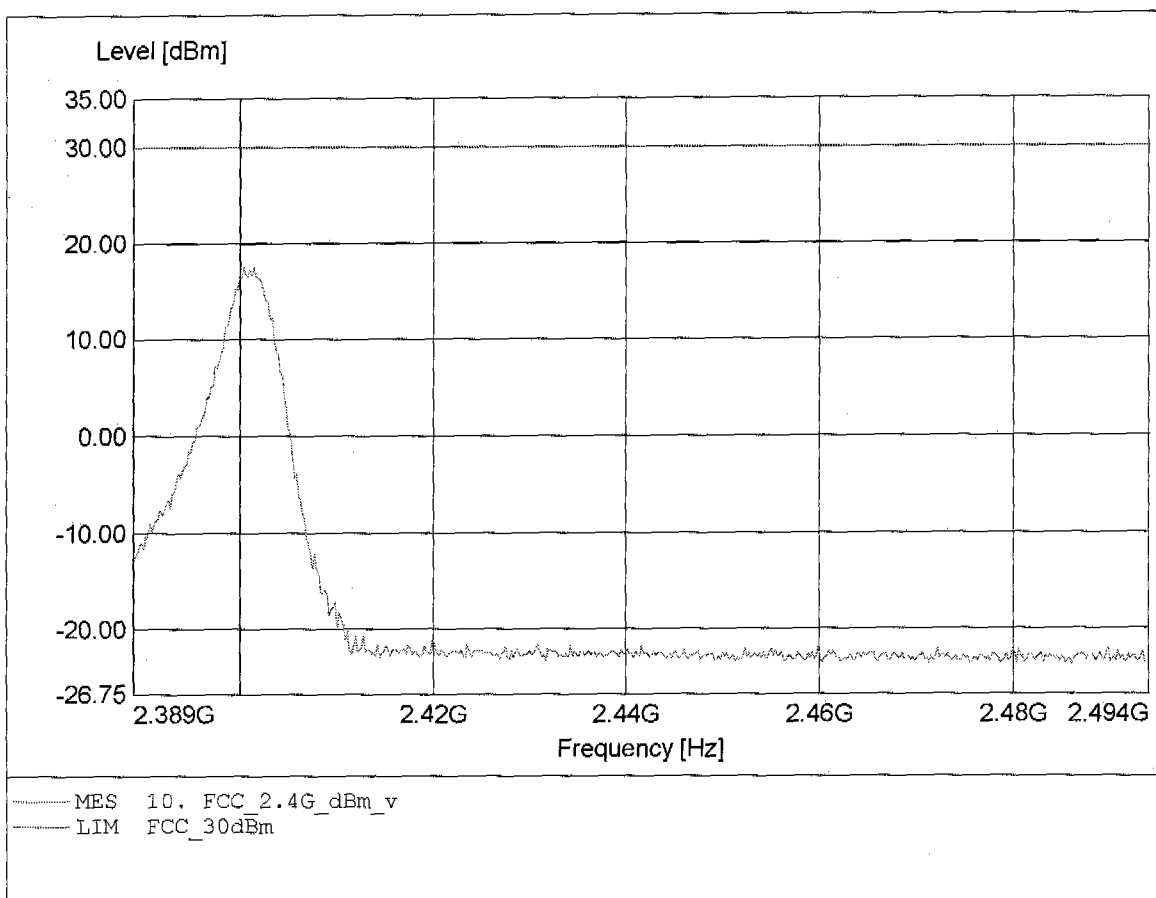


**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 2  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Umin.: 102 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 2.401GHz, Pmax: 16.99dBm, RBW: 5MHz

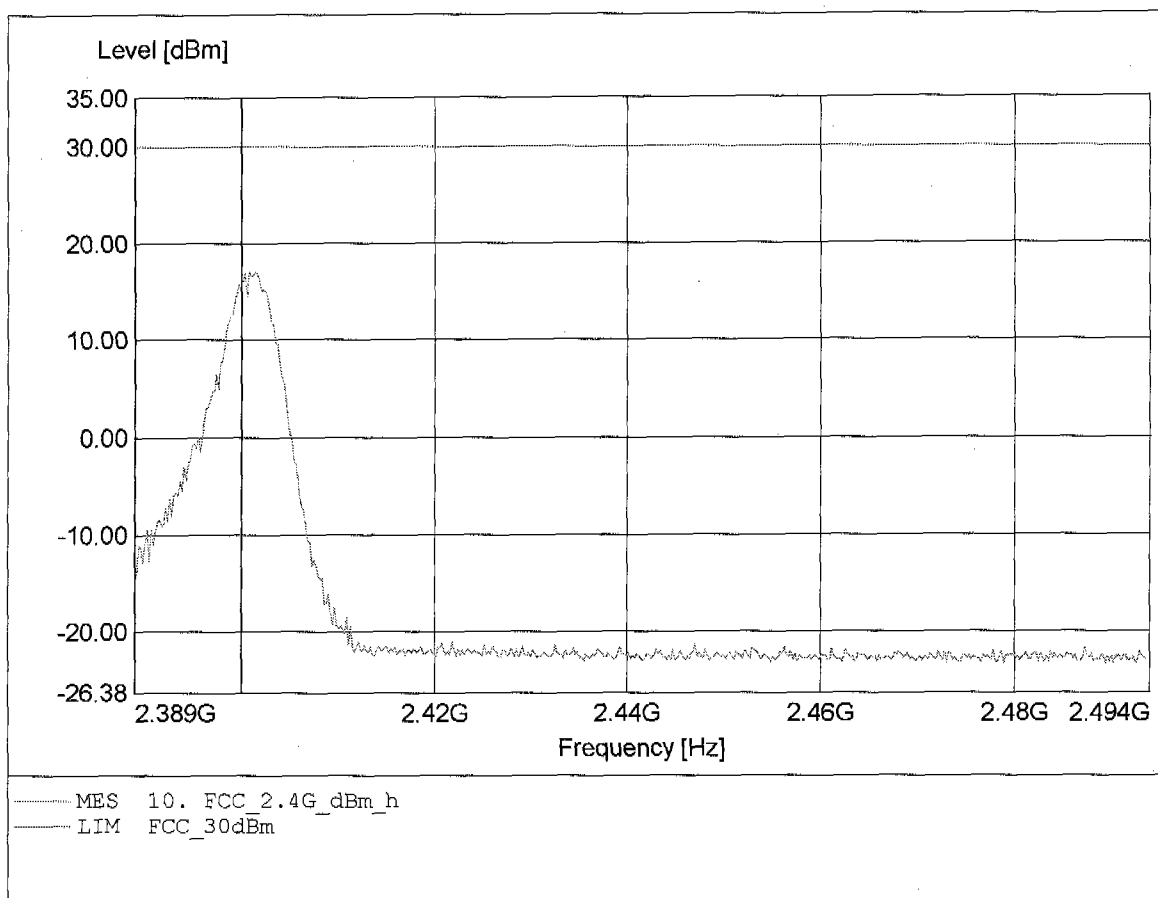


**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 47 / Ant. 2  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Umin.: 102 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 2.442GHz, Pmax: 18.79dBm, RBW: 5MHz

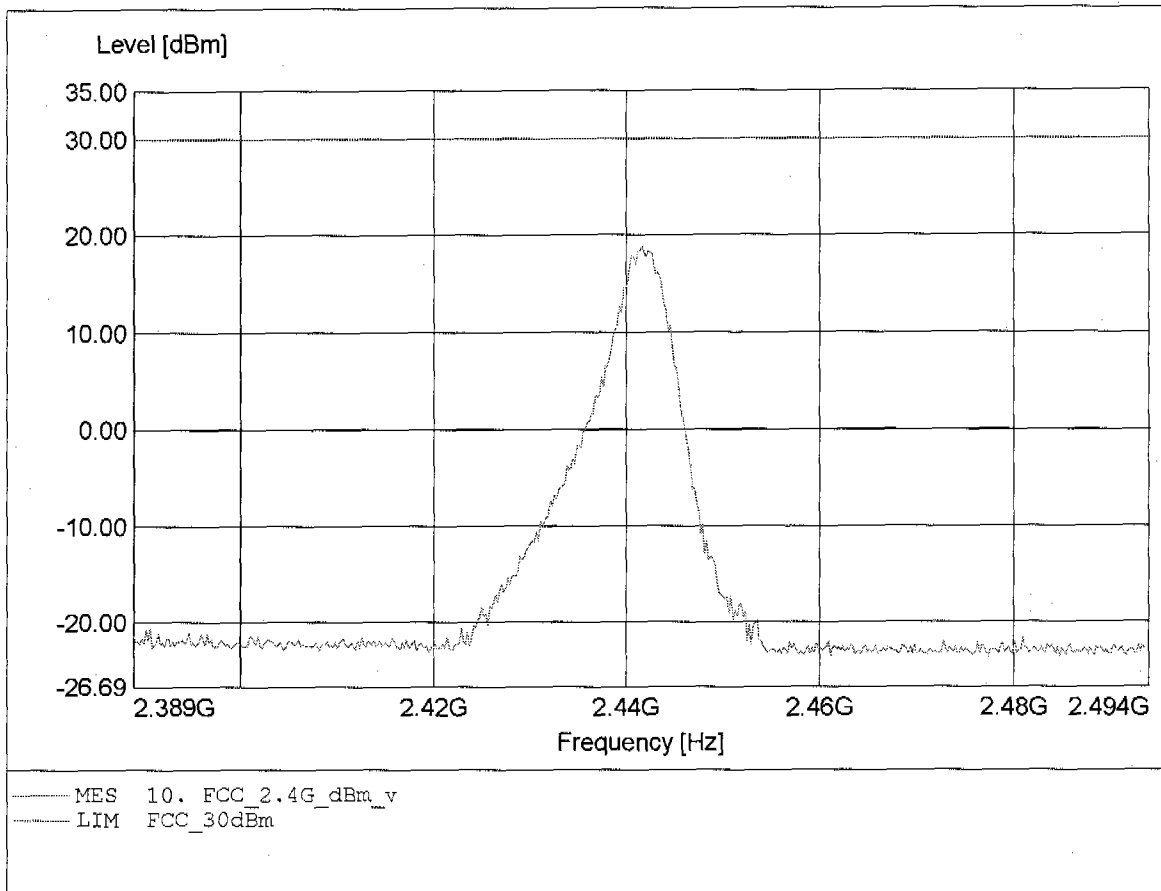


**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 47 / Ant. 2  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Umin.: 102 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 2.441GHz, Pmax: 17.77dBm, RBW: 5MHz

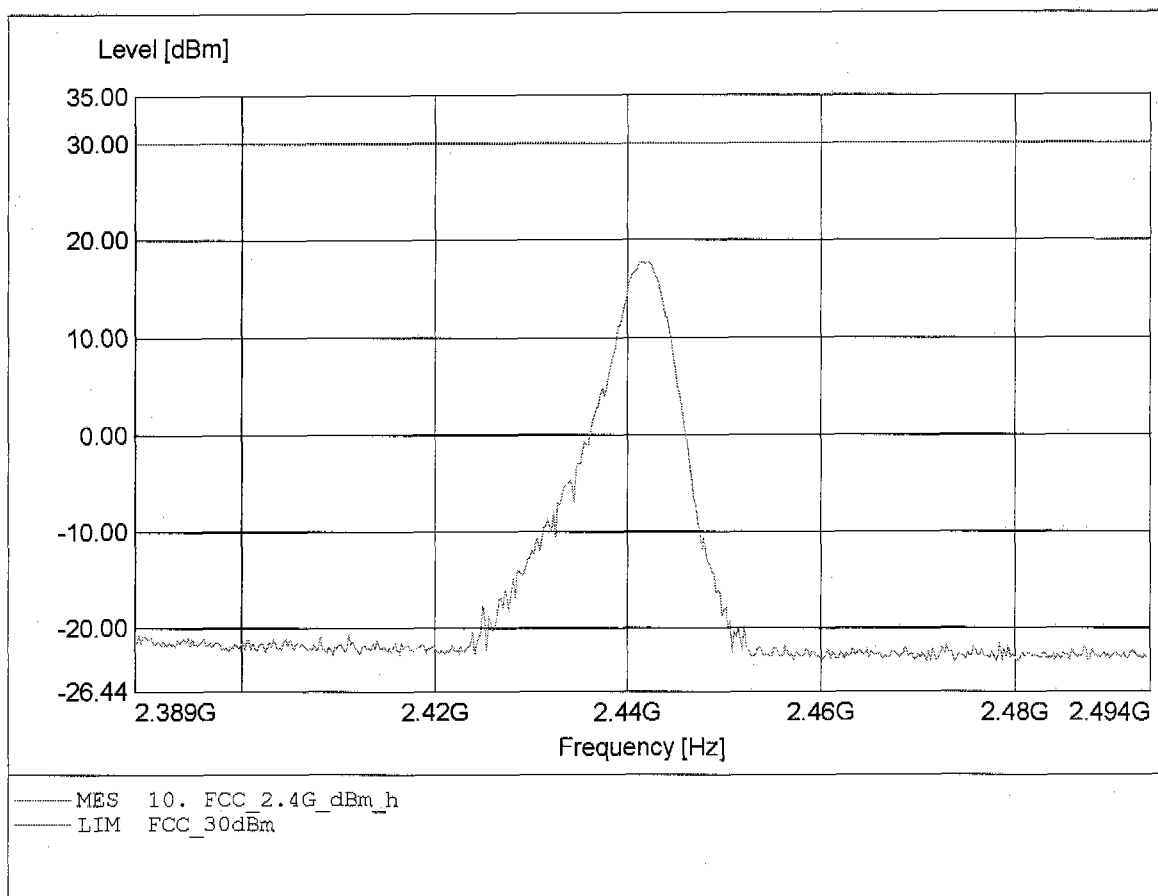


**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 2  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Umin.: 102 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 2.482GHz, Pmax: 19.51dBm, RBW: 5MHz

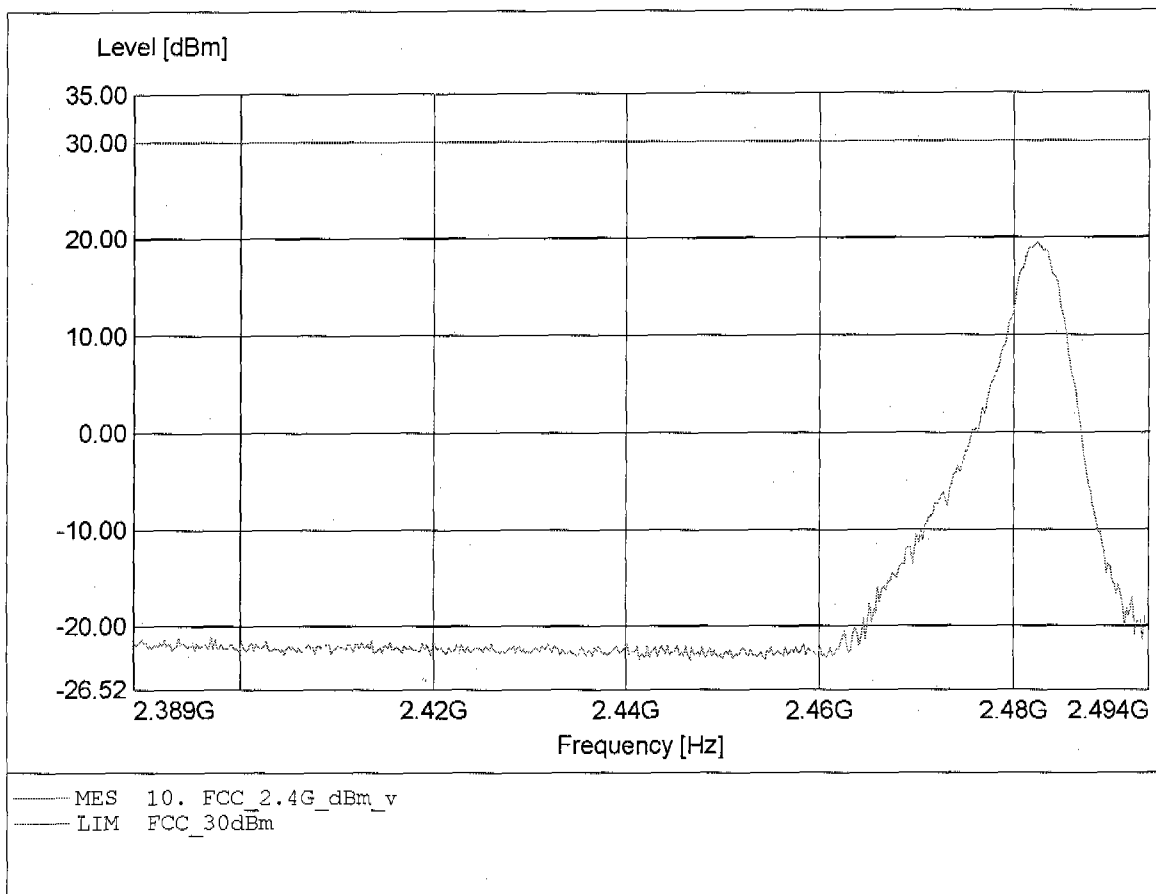

**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 2  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Umin.: 102 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 2.483GHz, Pmax: 15.30dBm, RBW: 5MHz

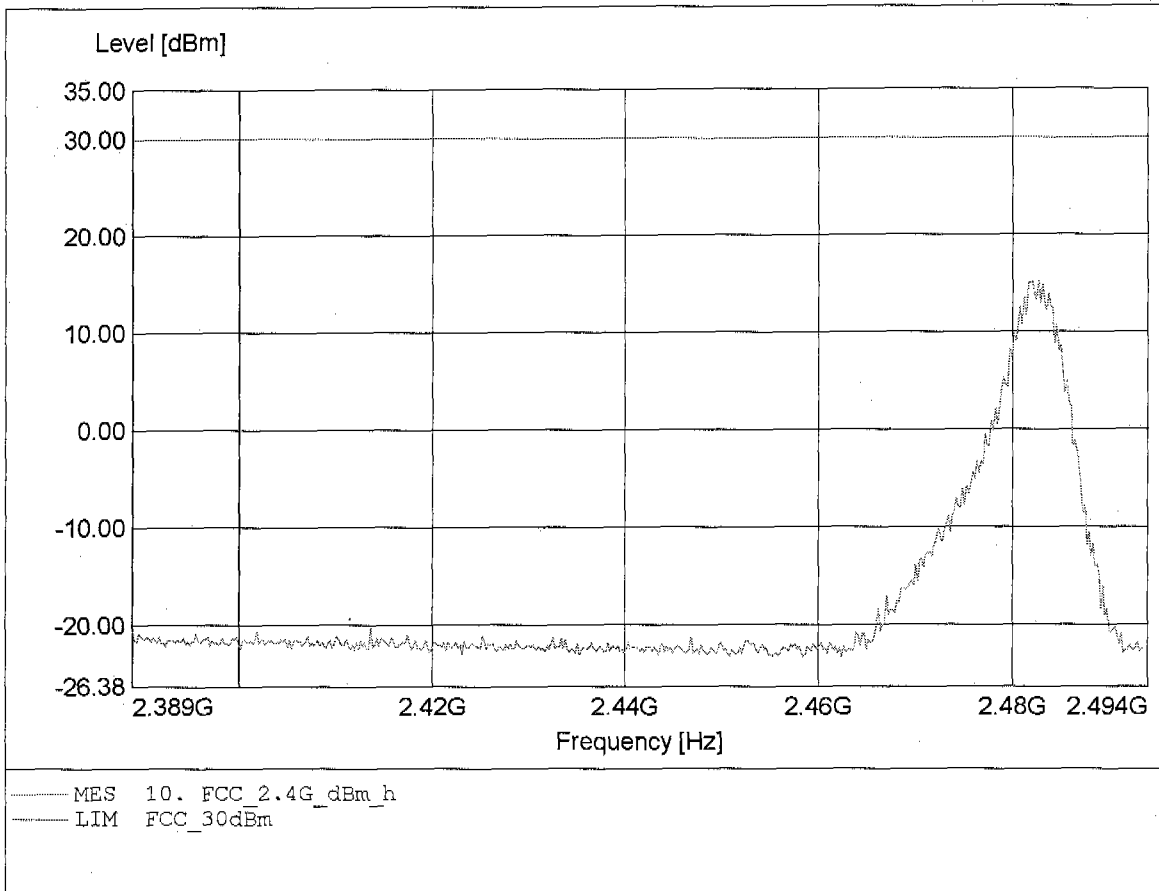






## Appendix C

Spurious Emissions radiated - Transmitter operating


**Carrier power (Field Strength)**  
**FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 2.482GHz, Emax: 115.94dBµV/m, RBW: 100kHz

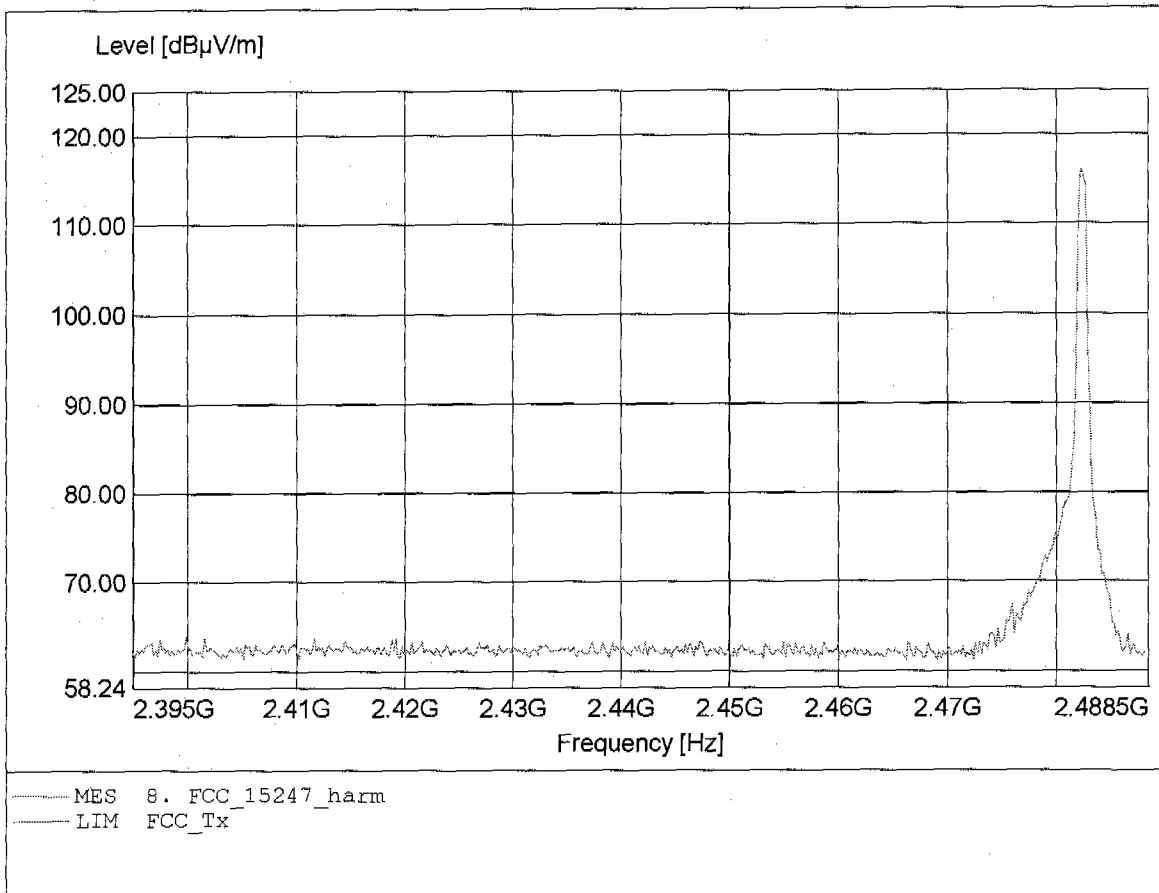


**Carrier power (Field Strength)  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 2  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 2.482GHz, Emax: 116.80dBµV/m, RBW: 100kHz

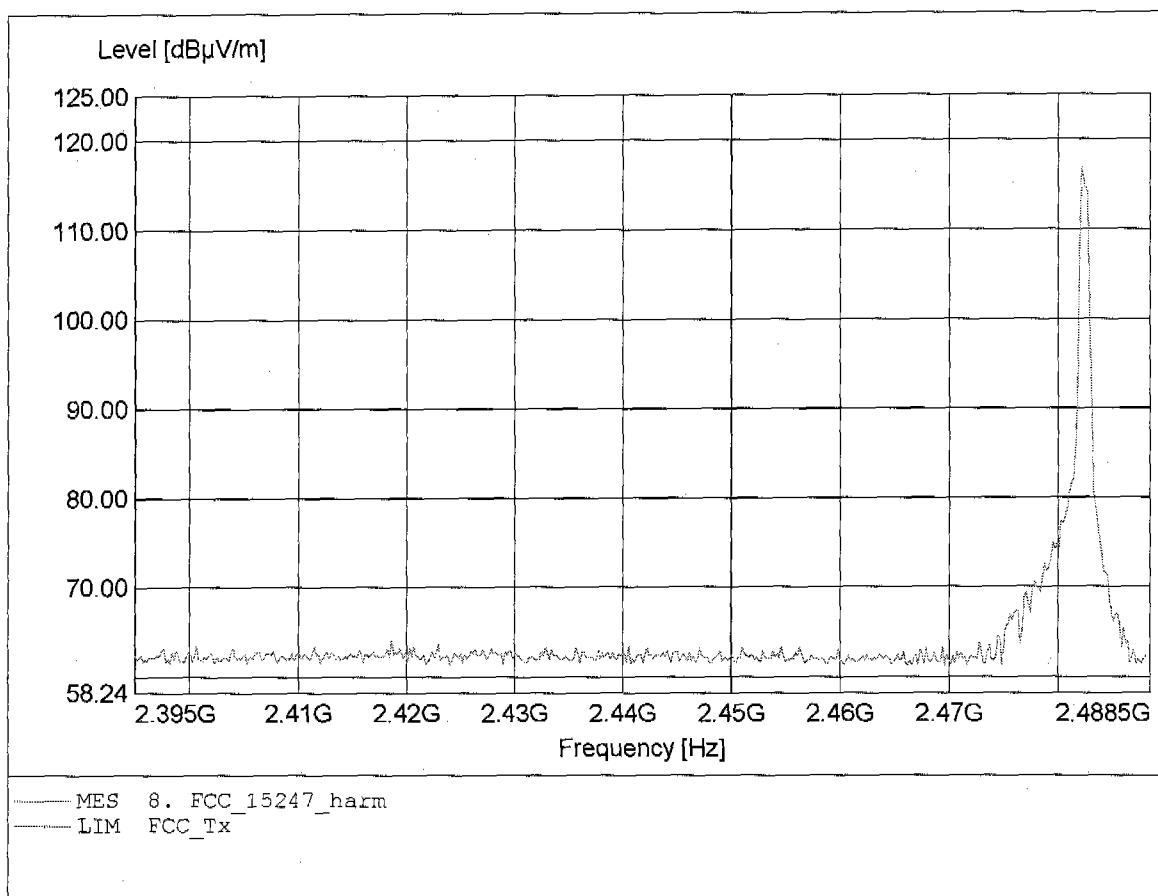


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 41.242MHz, Emax: 36.91dBµV/m, RBW: 100kHz

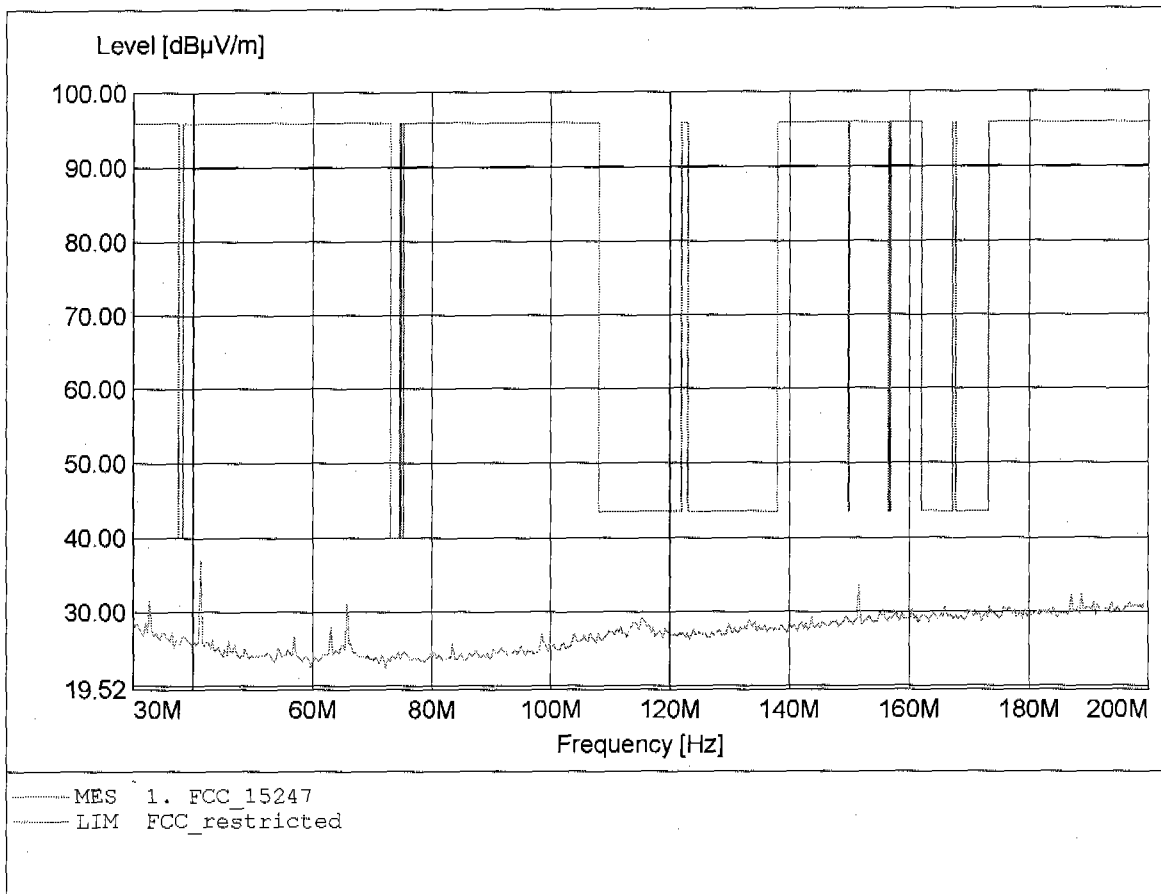


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 186.713MHz, Emax: 32.26dBµV/m, RBW: 100kHz

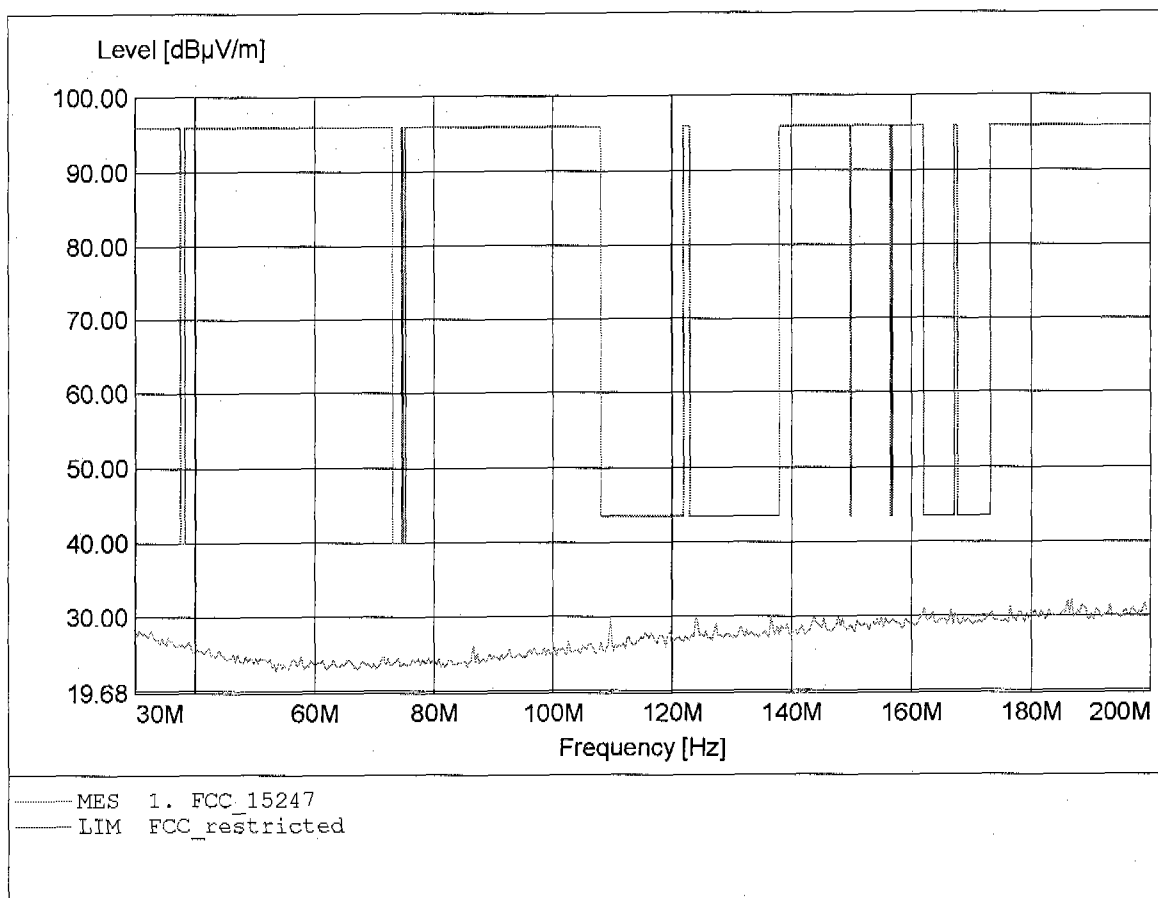


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Comment 2: Freq: 640.882MHz, Emax: 39.57dBµV/m, RBW: 100kHz

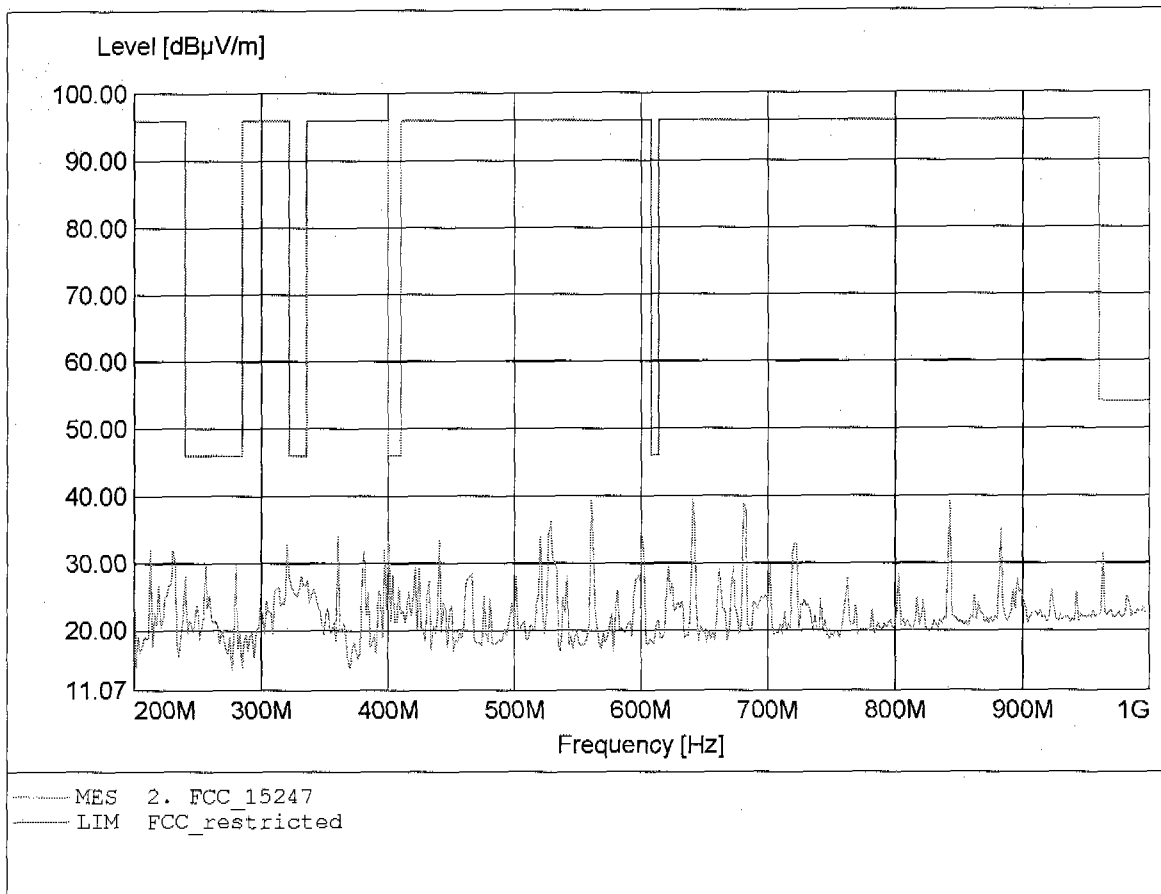


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Comment 2: Freq: 842.886MHz, Emax: 39.93dBµV/m, RBW: 100kHz

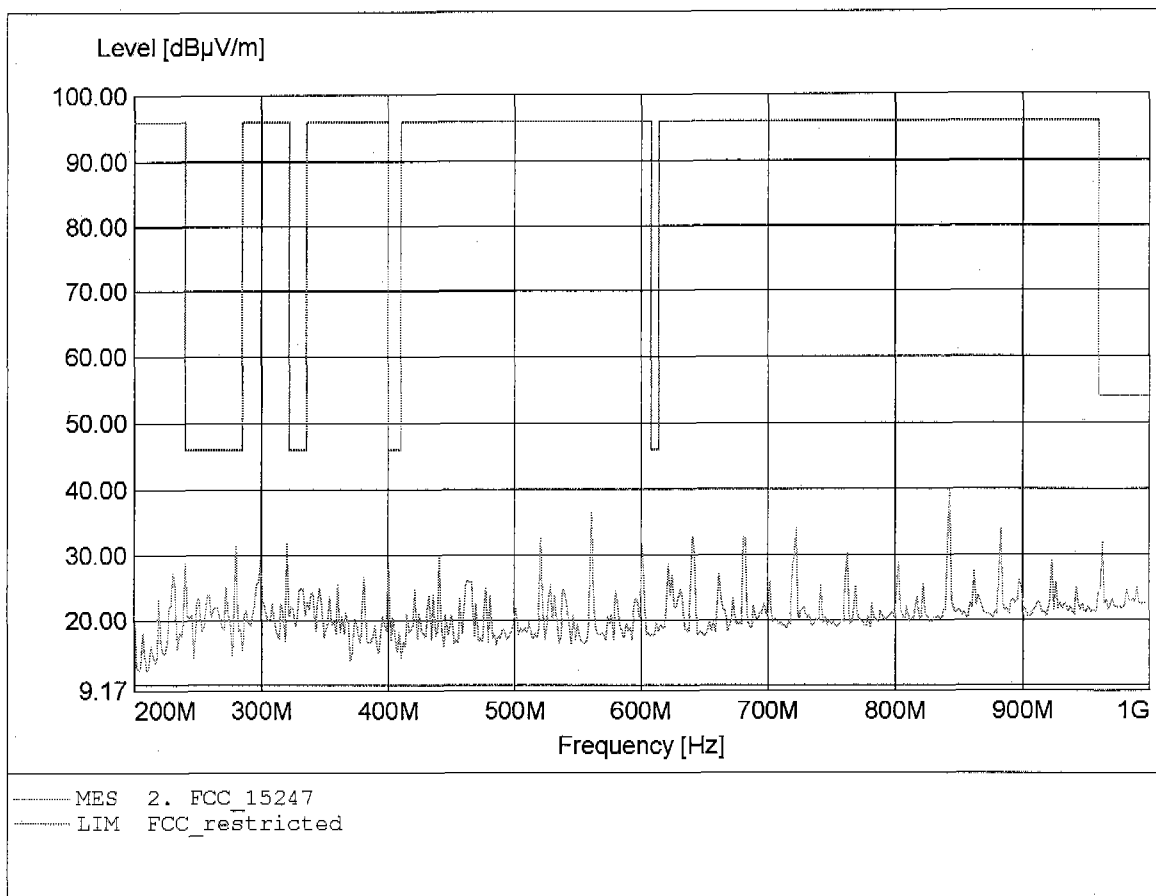

**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**


Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 2.394GHz, Emax: 76.73dBµV/m, RBW: 1MHz

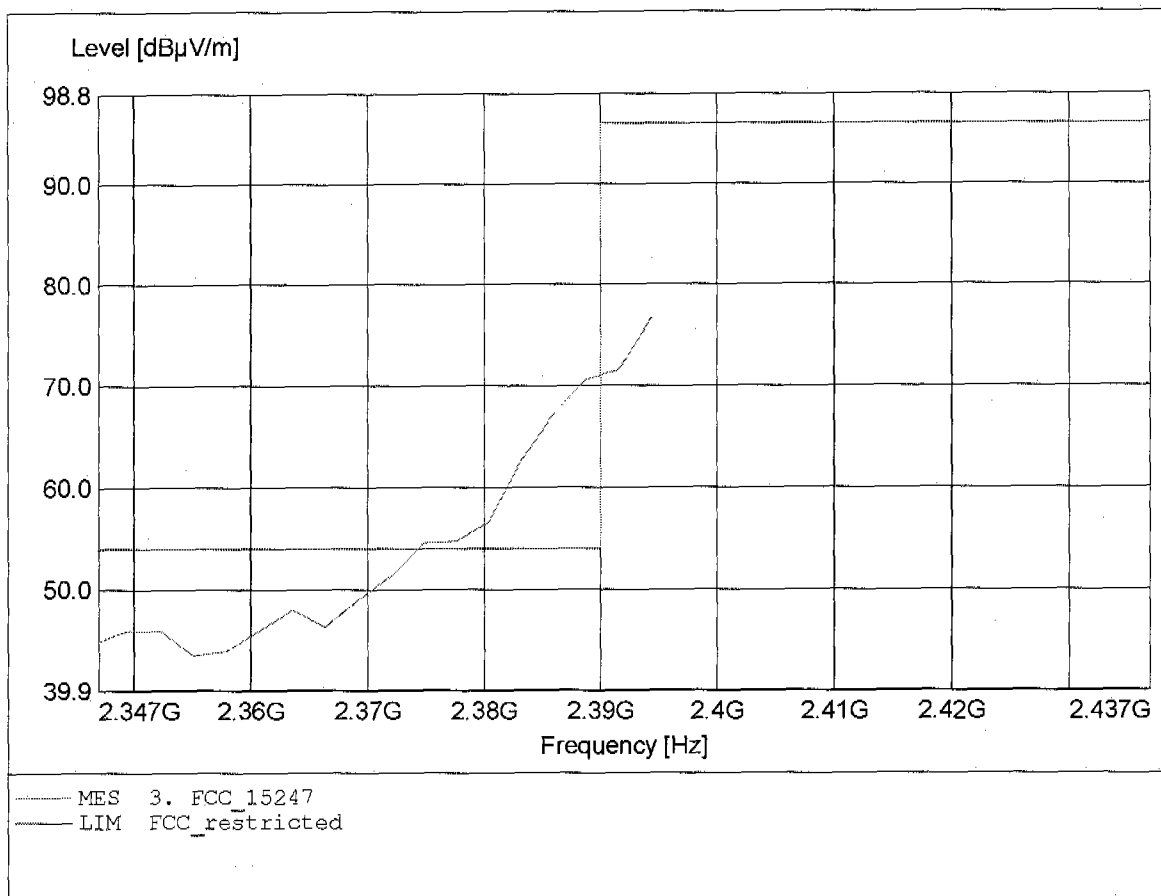




**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247, average detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 2.394GHz, Emax: 47.74dBµV/m, RBW: 1MHz

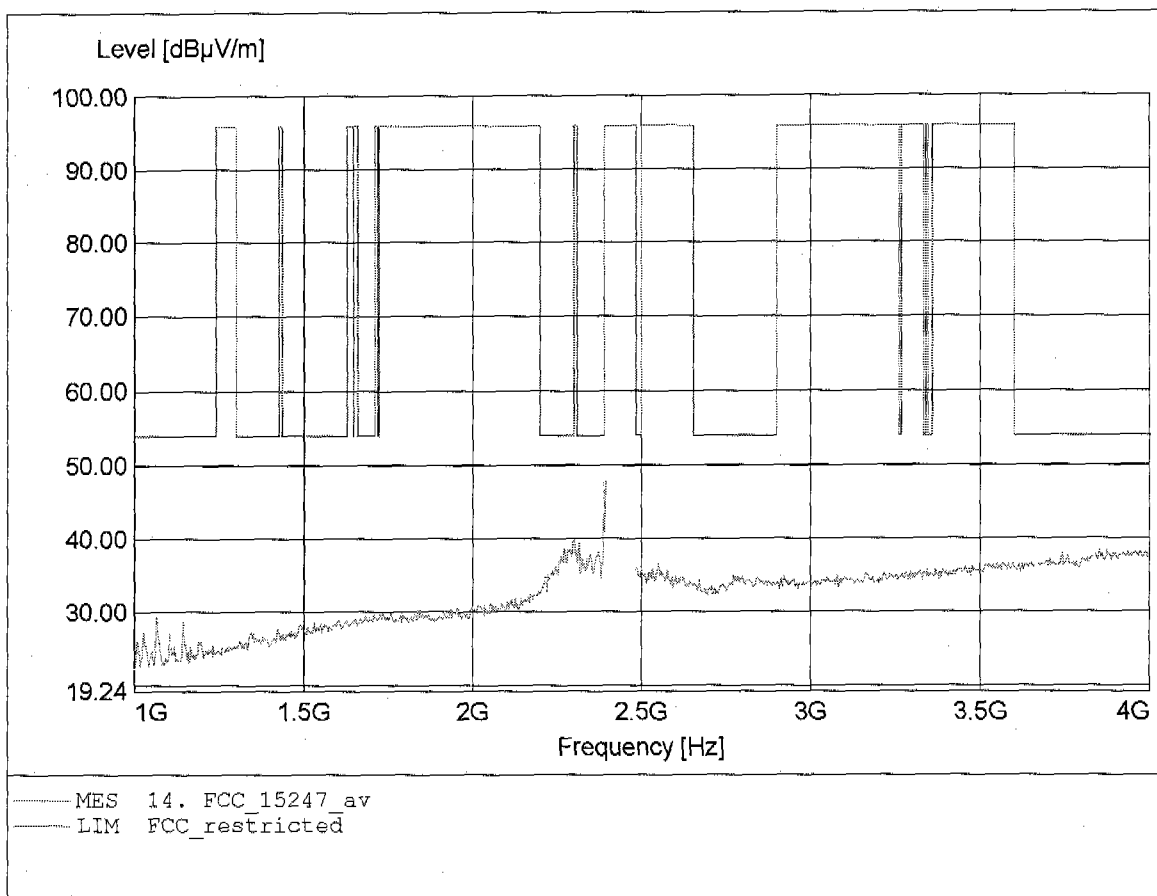


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 2.394GHz, Emax: 76.73dBµV/m, RBW: 1MHz

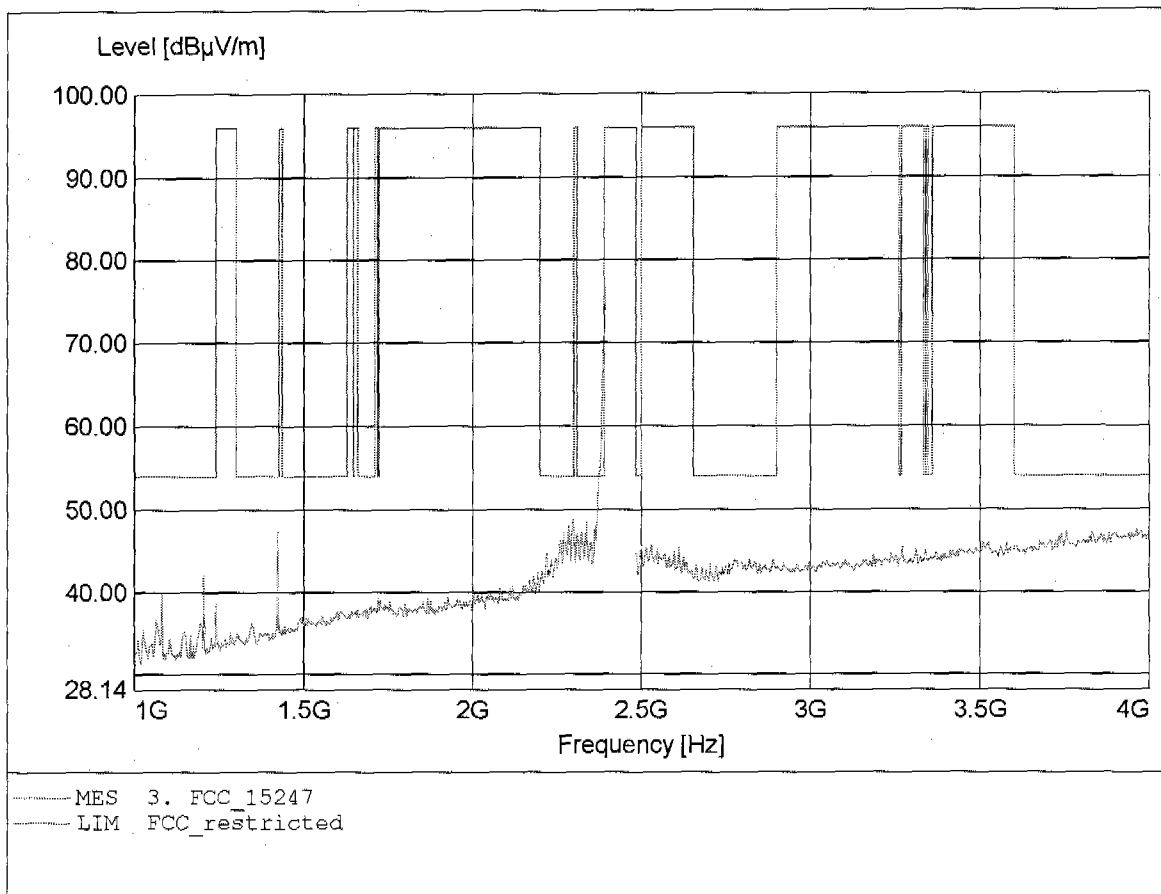


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 2.394GHz, Emax: 79.12dBµV/m, RBW: 1MHz

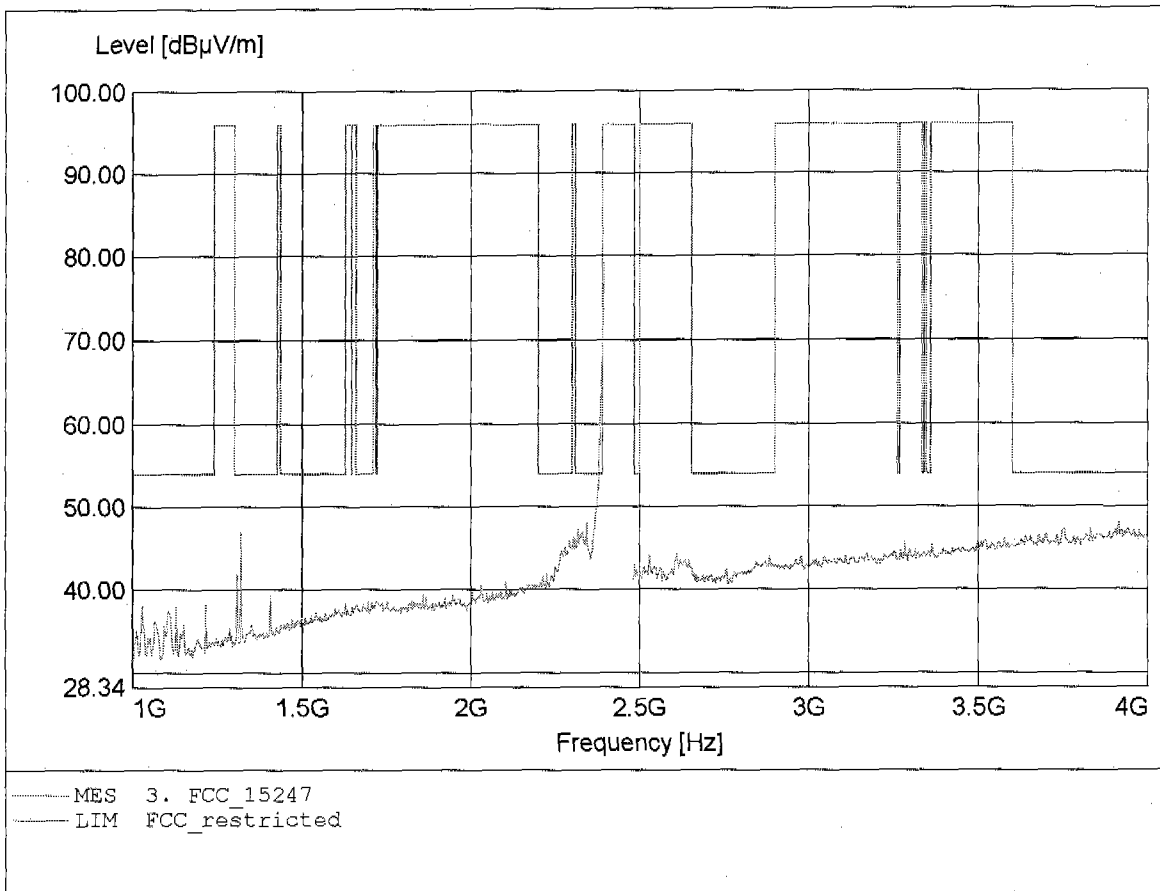


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 2.394GHz, Emax: 79.12dBµV/m, RBW: 1MHz

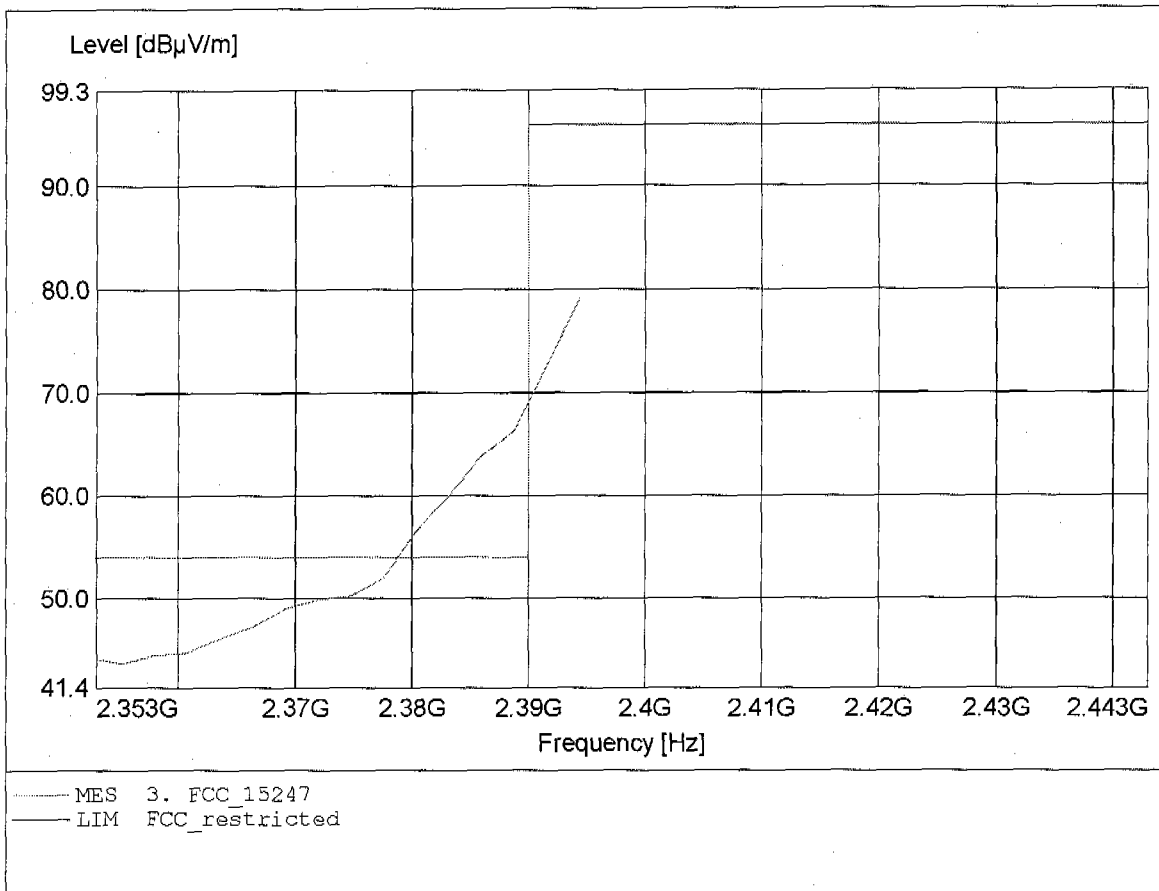


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247, average detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 2.394GHz, Emax: 56.25dBµV/m, RBW: 1MHz

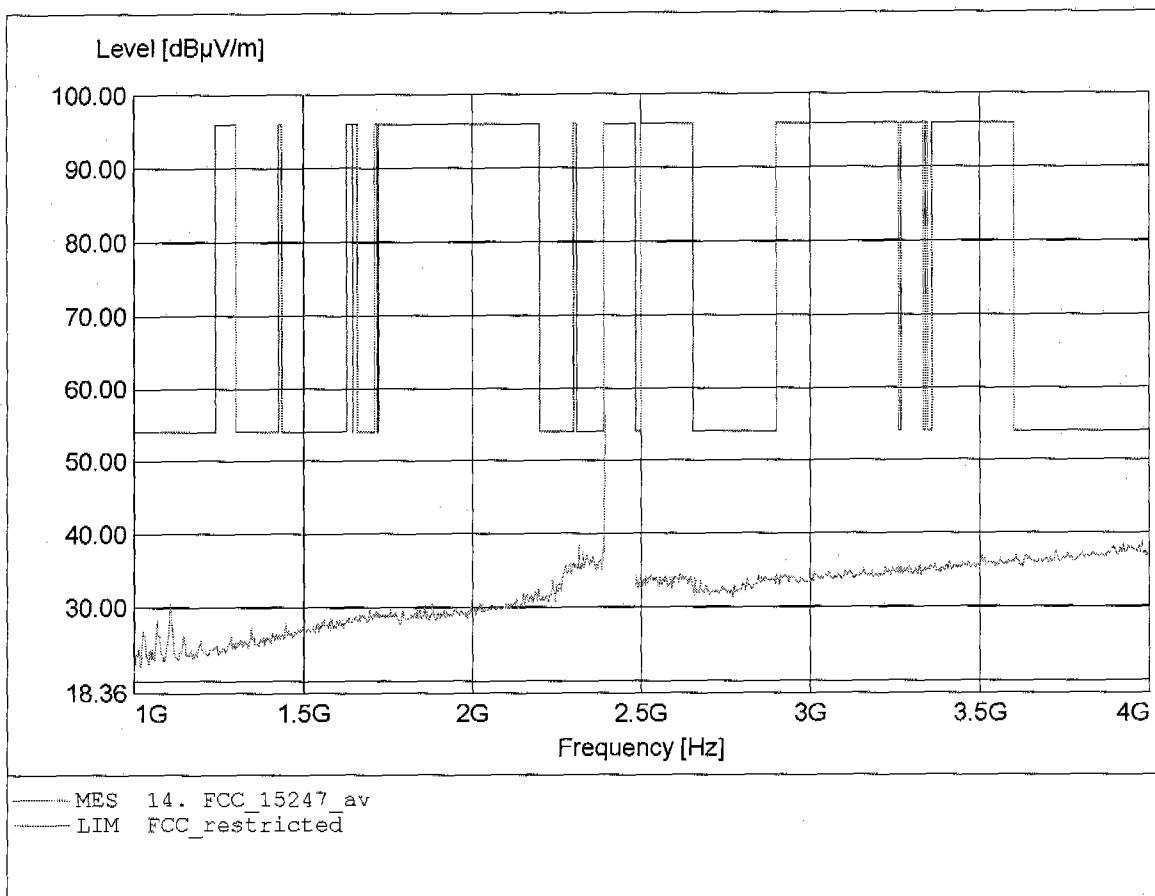


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
 EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 1  
 Model: GN Ellipse 2.4  
 Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
 Test Site / Operator: ETS / Mr. Handrik  
 Test Specification: according to §15.247, average detector  
 Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
 Comment 2: Freq: 2.394GHz, Emax: 56.25dBµV/m, RBW: 1MHz

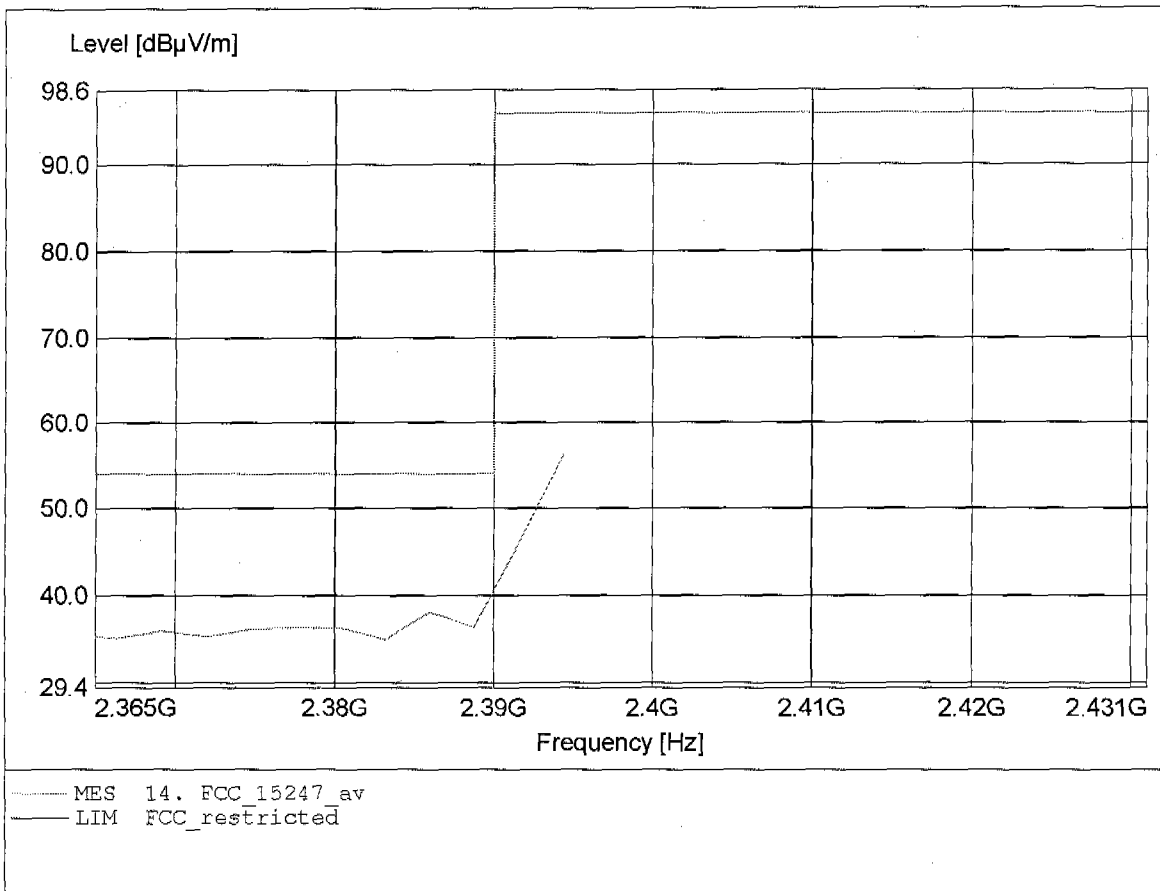


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 4.802GHz, Emax: 54.22dBµV/m, RBW: 1MHz

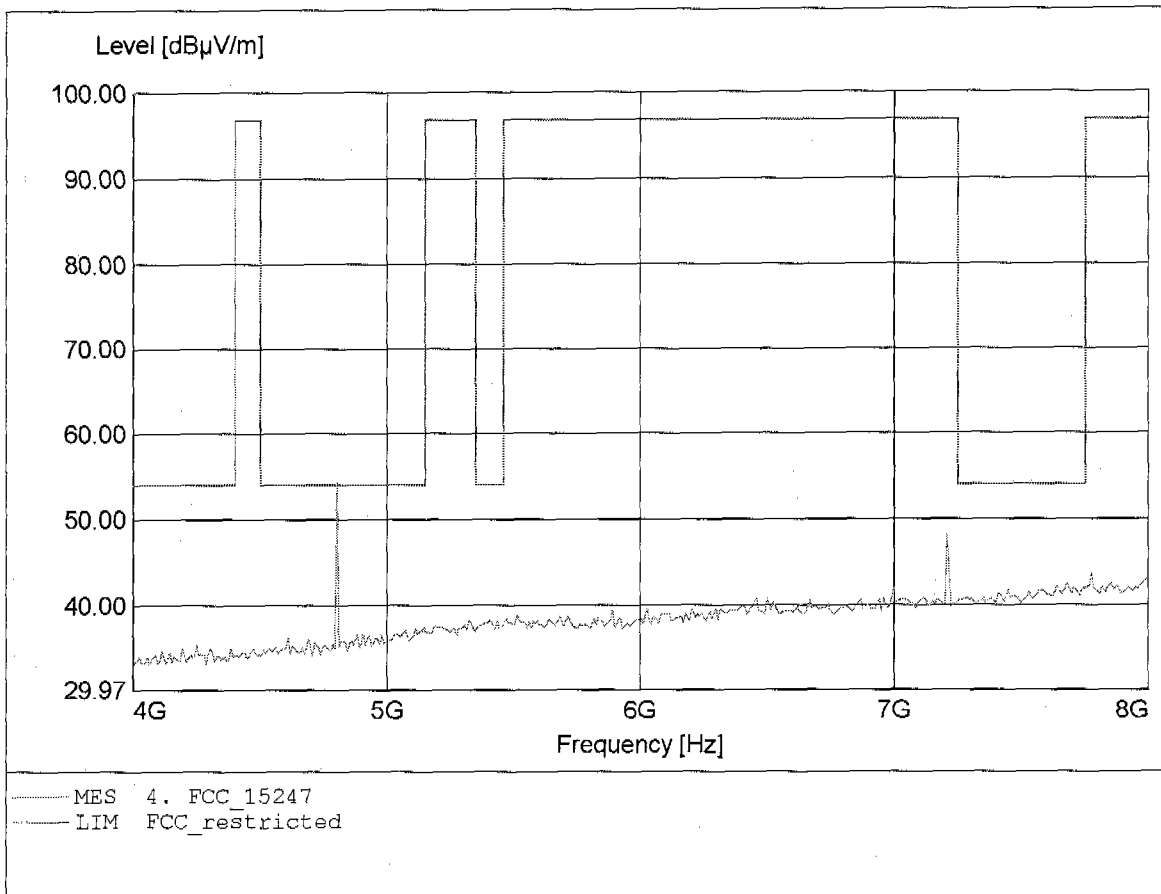

**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**


Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247, average detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 7.206GHz, Emax: 32.82dBµV/m, RBW: 1MHz

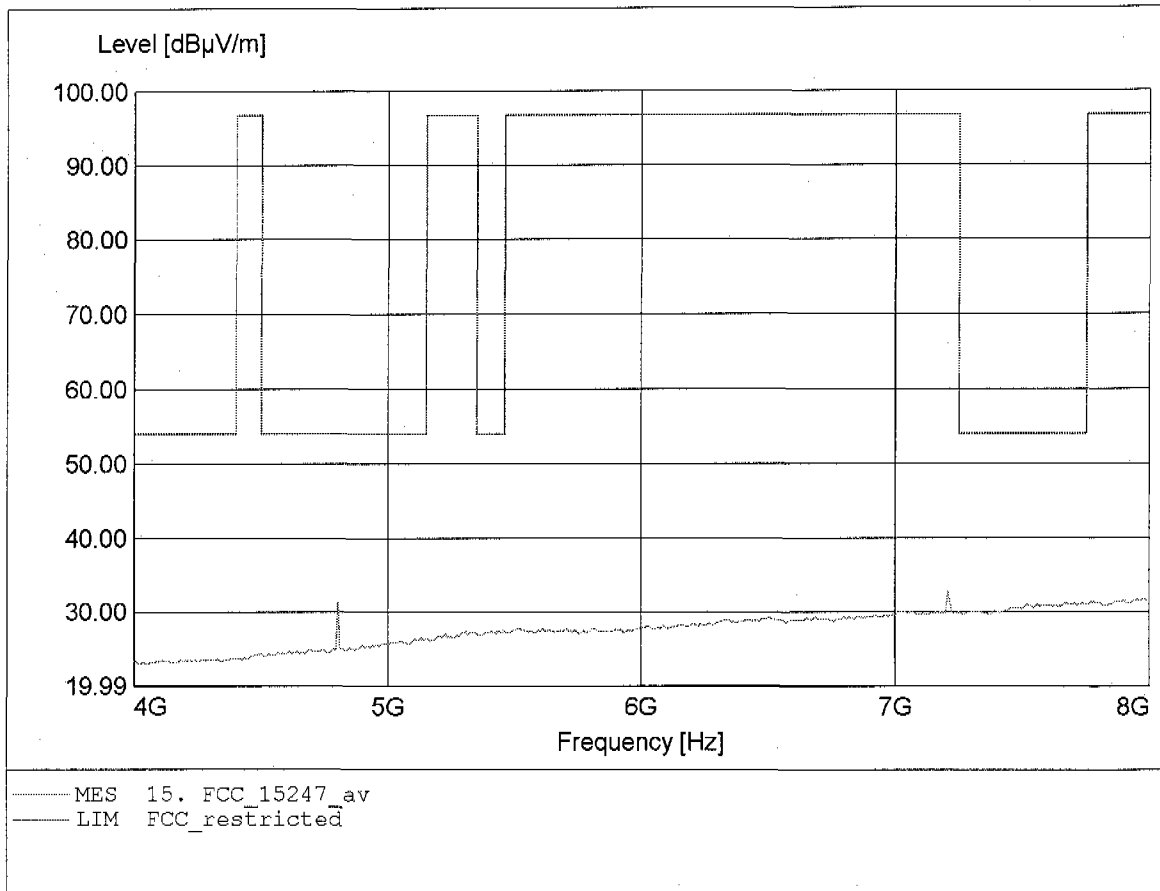




**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 4.802GHz, Emax: 53.51dBµV/m, RBW: 1MHz

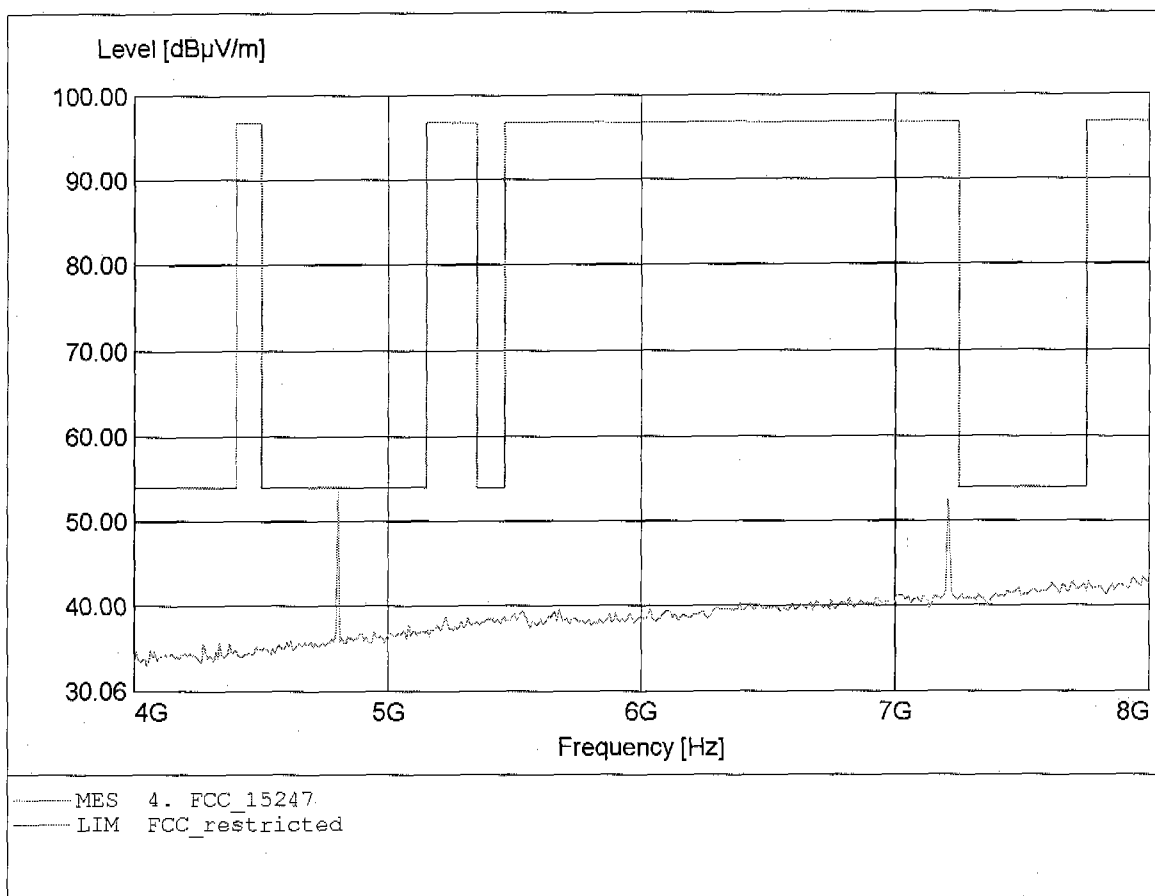


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 9.603GHz, Emax: 50.10dBµV/m, RBW: 1MHz

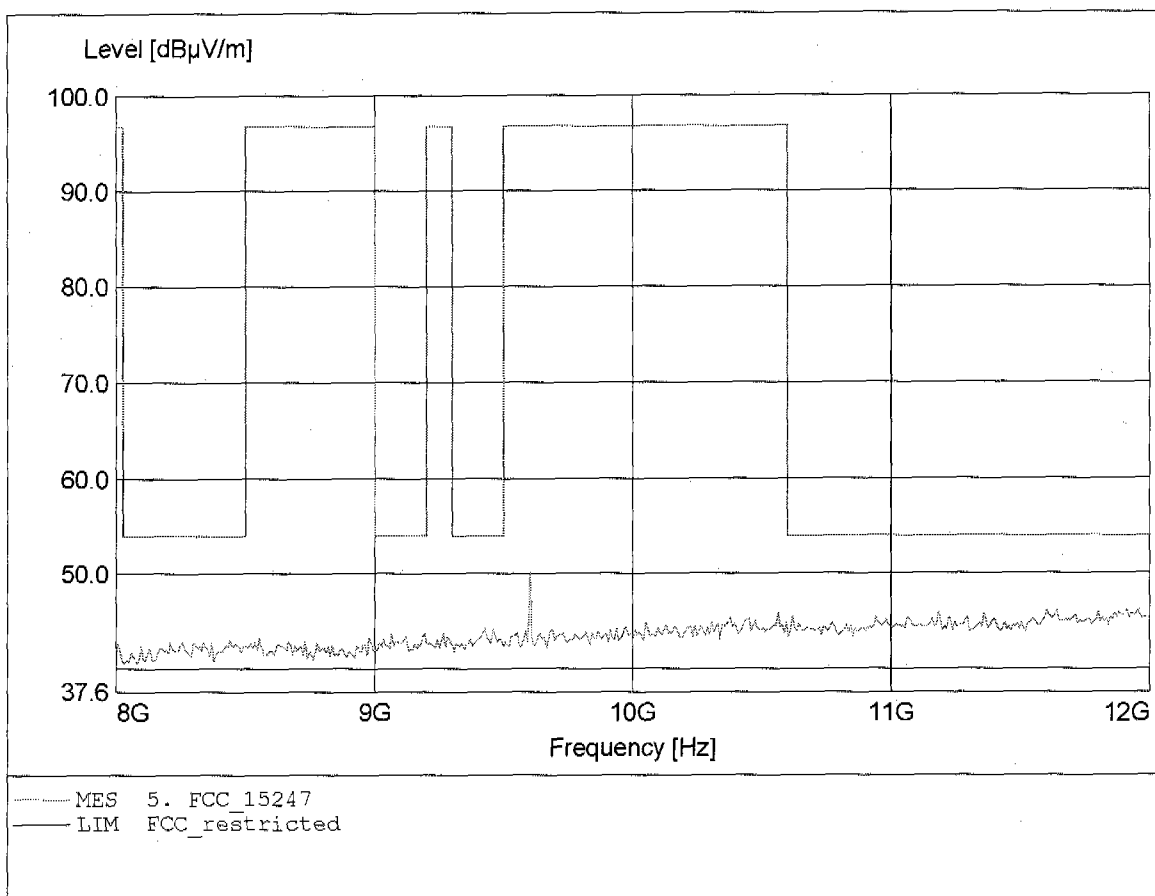


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 9.603GHz, Emax: 50.28dBµV/m, RBW: 1MHz

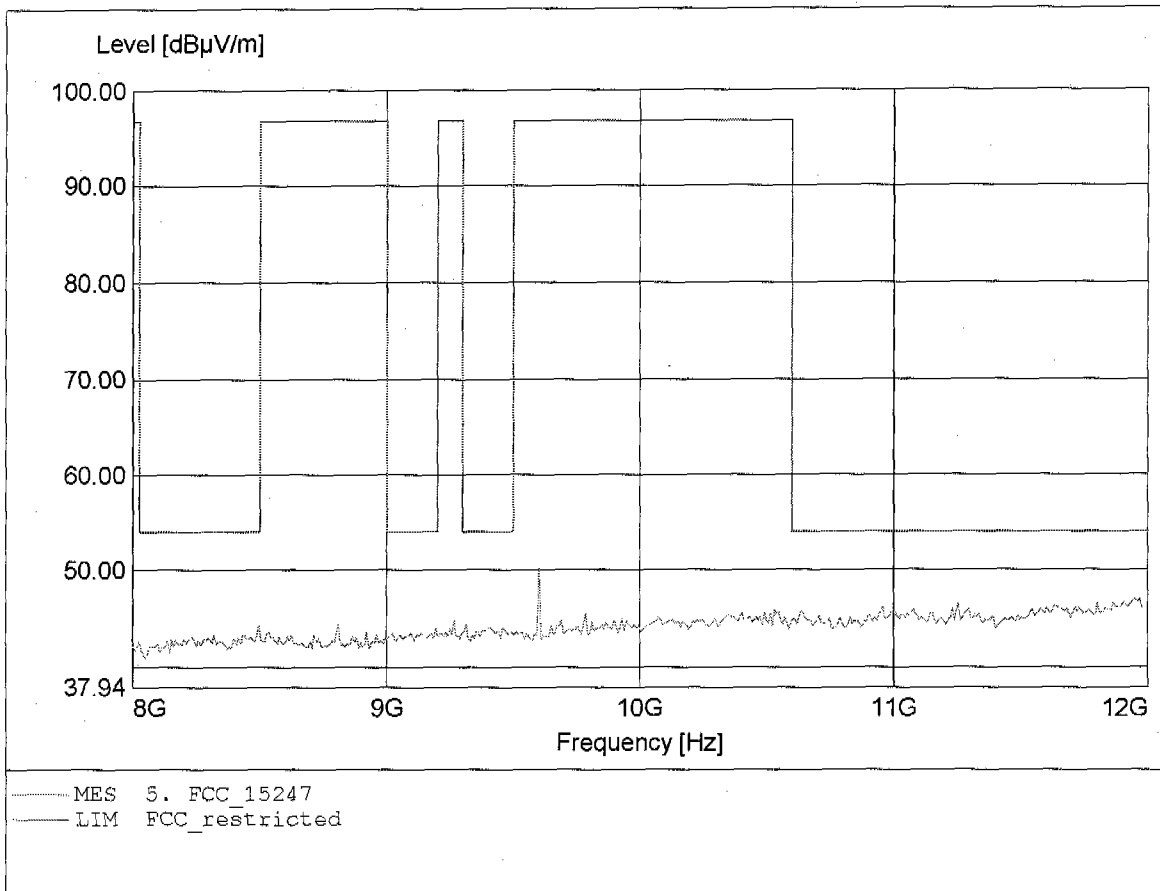


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 14.273GHz, Emax: 51.30dBµV/m, RBW: 1MHz

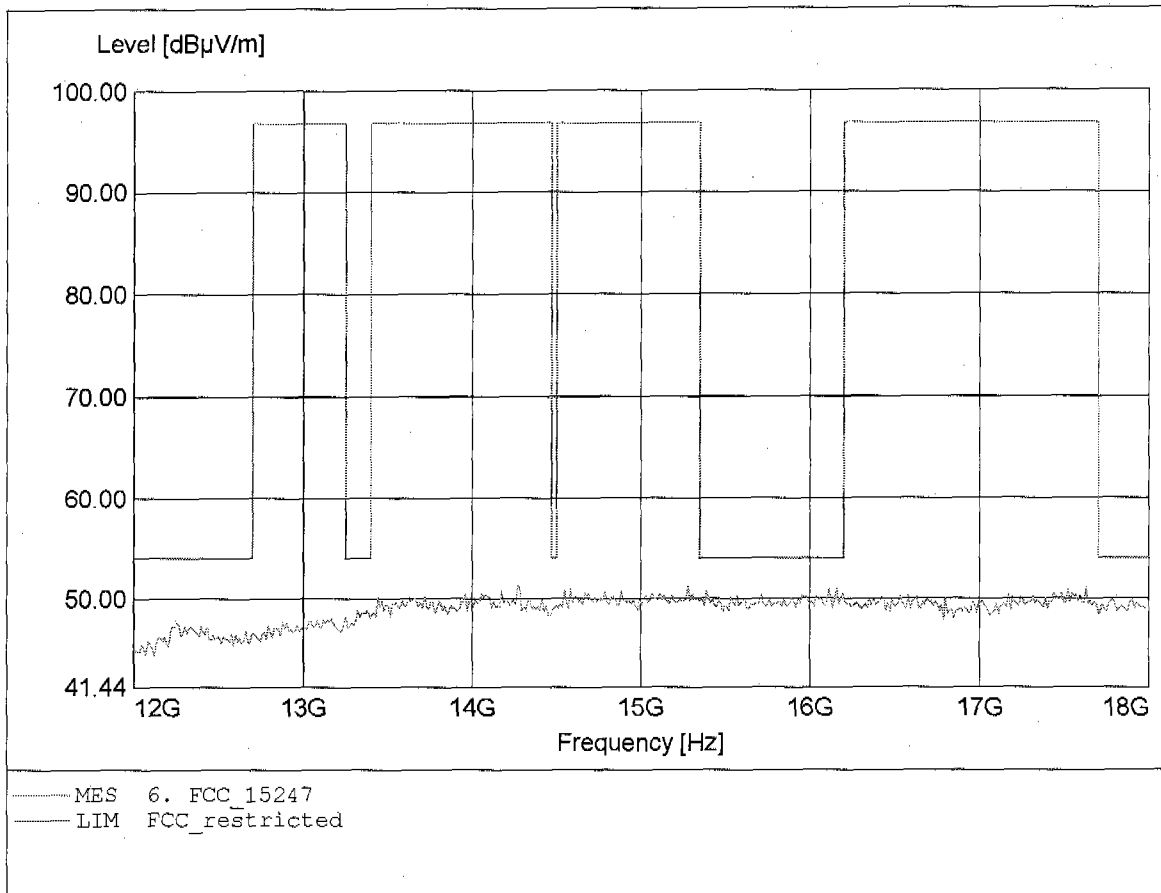


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 16.281GHz, Emax: 51.40dBµV/m, RBW: 1MHz

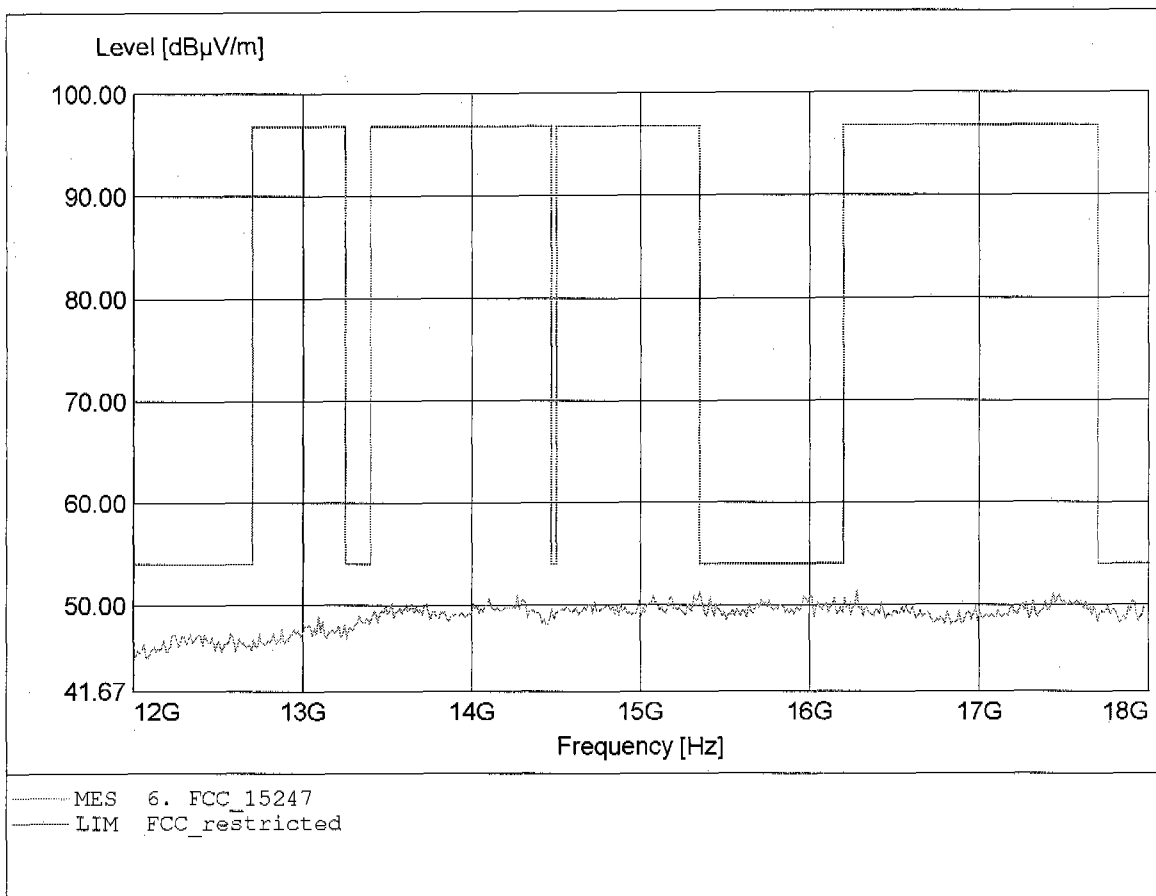


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 26.227GHz, Emax: 50.15dBµV/m, RBW: 1MHz

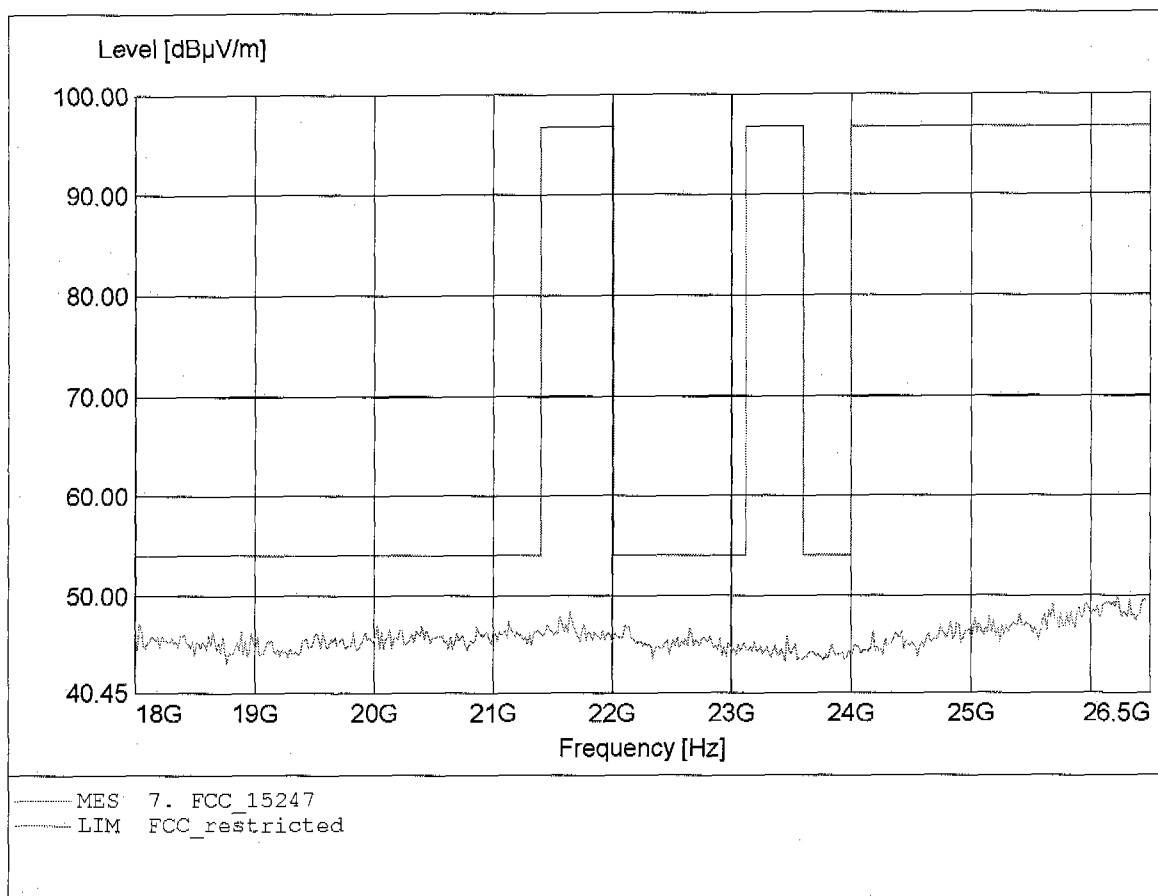


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 26.176GHz, Emax: 50.89dBµV/m, RBW: 1MHz

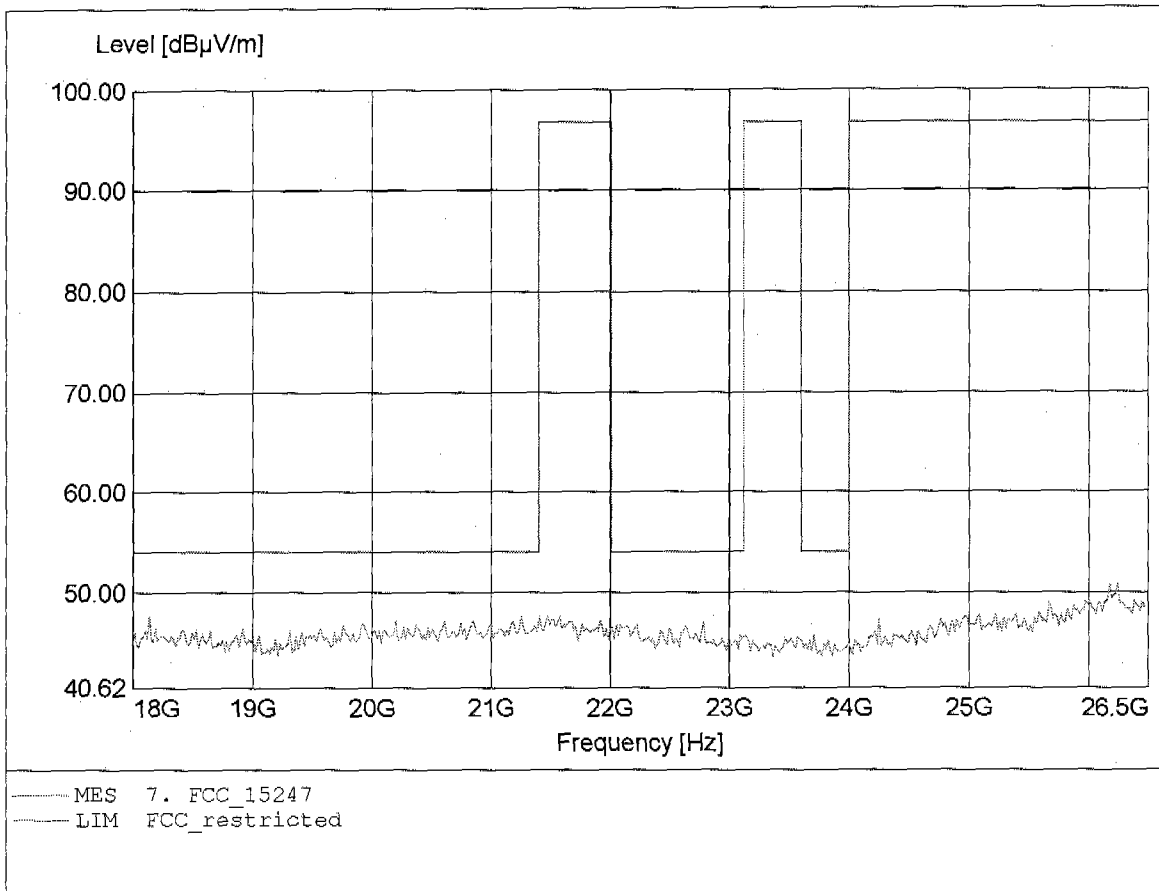

**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**


Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 47 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 181.603MHz, Emax: 32.09dBµV/m, RBW: 100kHz

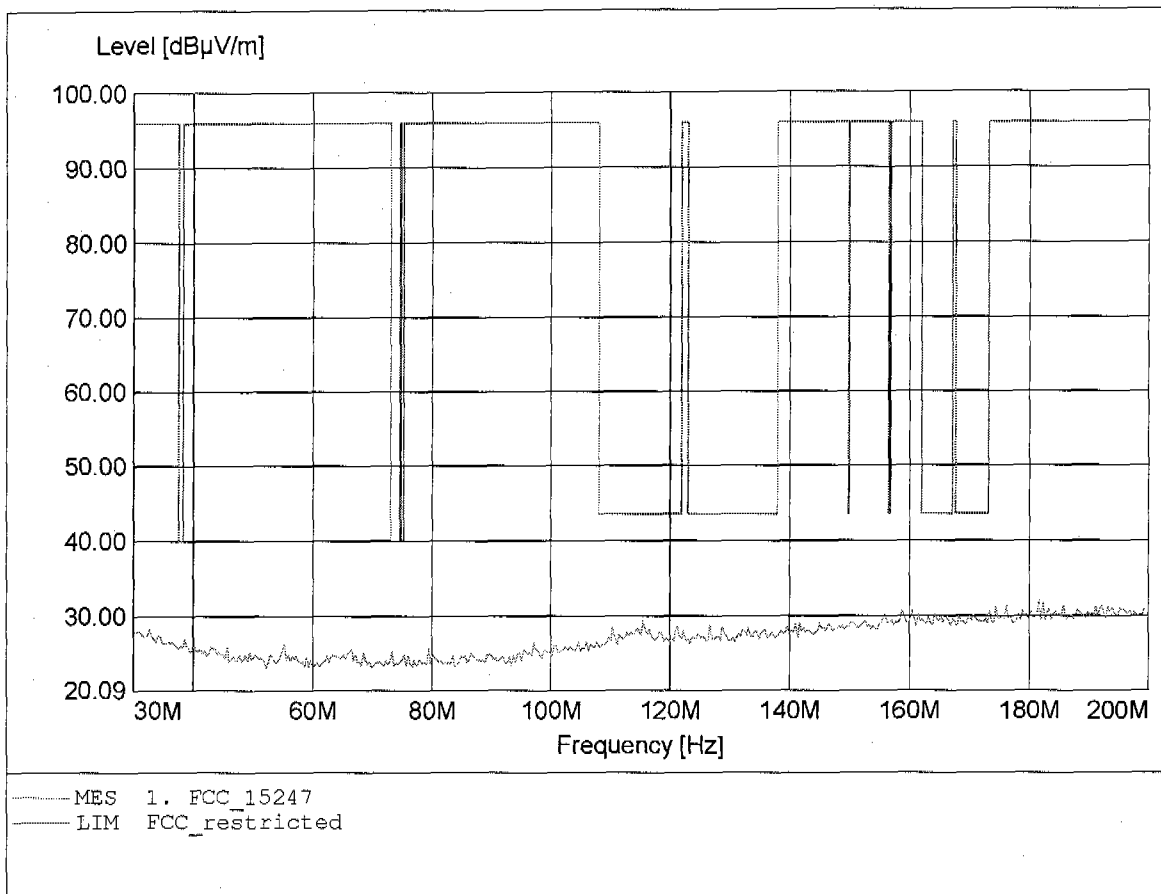




**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 47 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 197.275MHz, Emax: 32.37dBµV/m, RBW: 100kHz

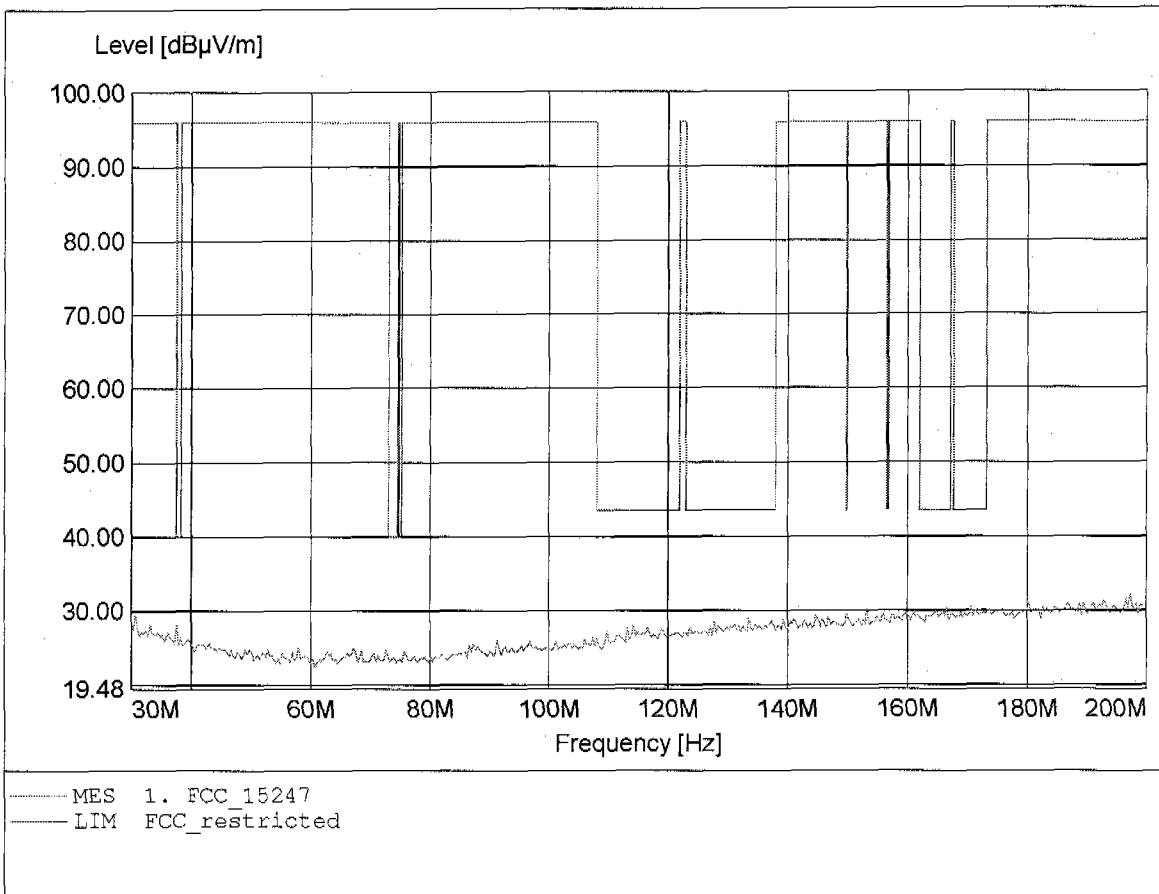


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 47 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Comment 2: Freq: 560.721MHz, Emax: 39.37dBµV/m, RBW: 100kHz

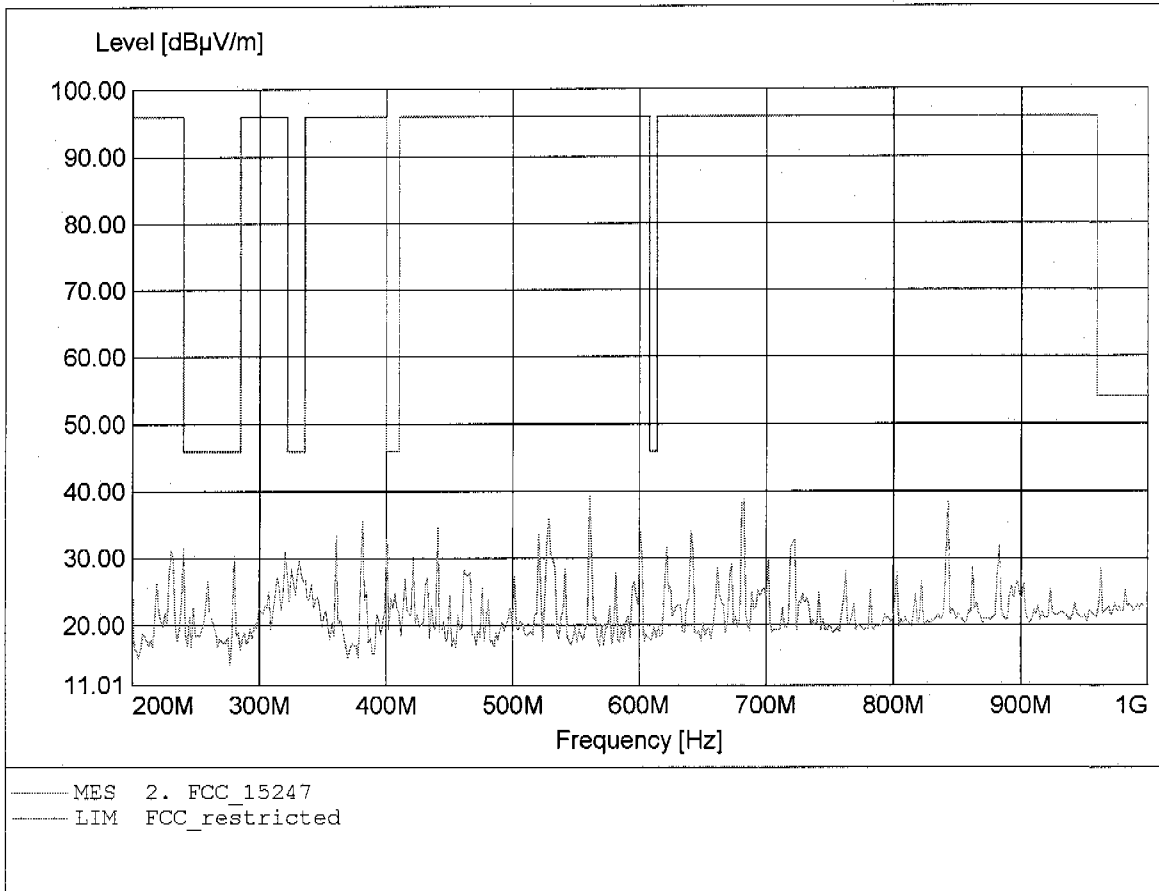


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 47 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Comment 2: Freq: 842.886MHz, Emax: 39.59dBµV/m, RBW: 100kHz

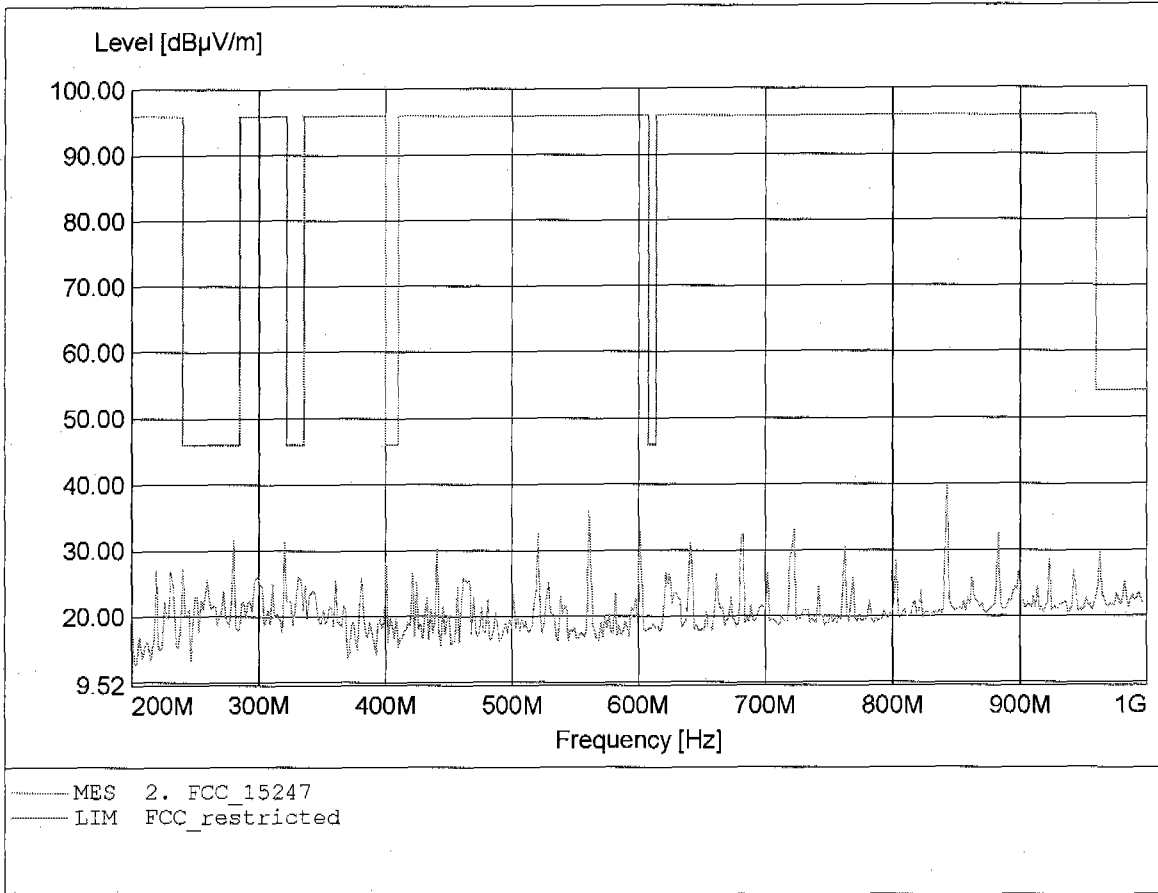


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 47 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 2.366GHz, Emax: 49.47dBµV/m, RBW: 1MHz

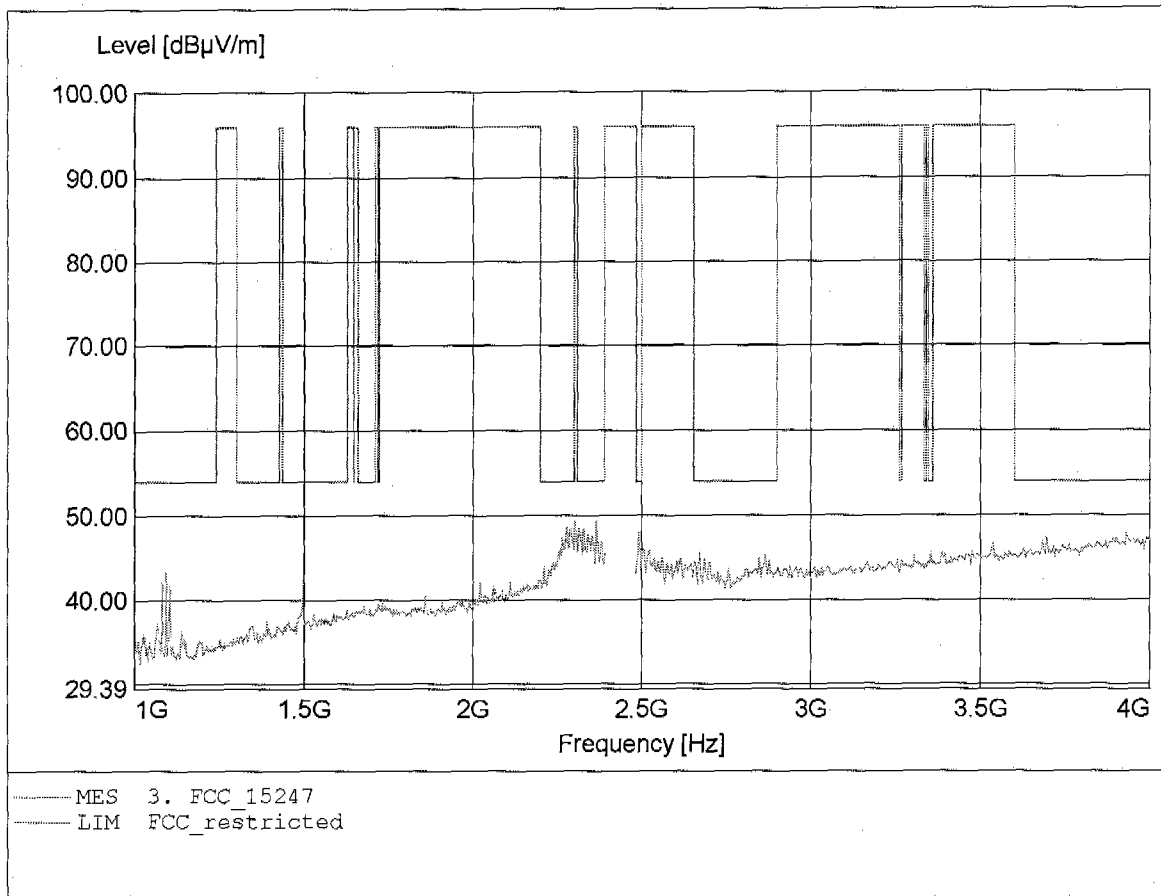


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 47 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 2.302GHz, Emax: 47.76dBµV/m, RBW: 1MHz

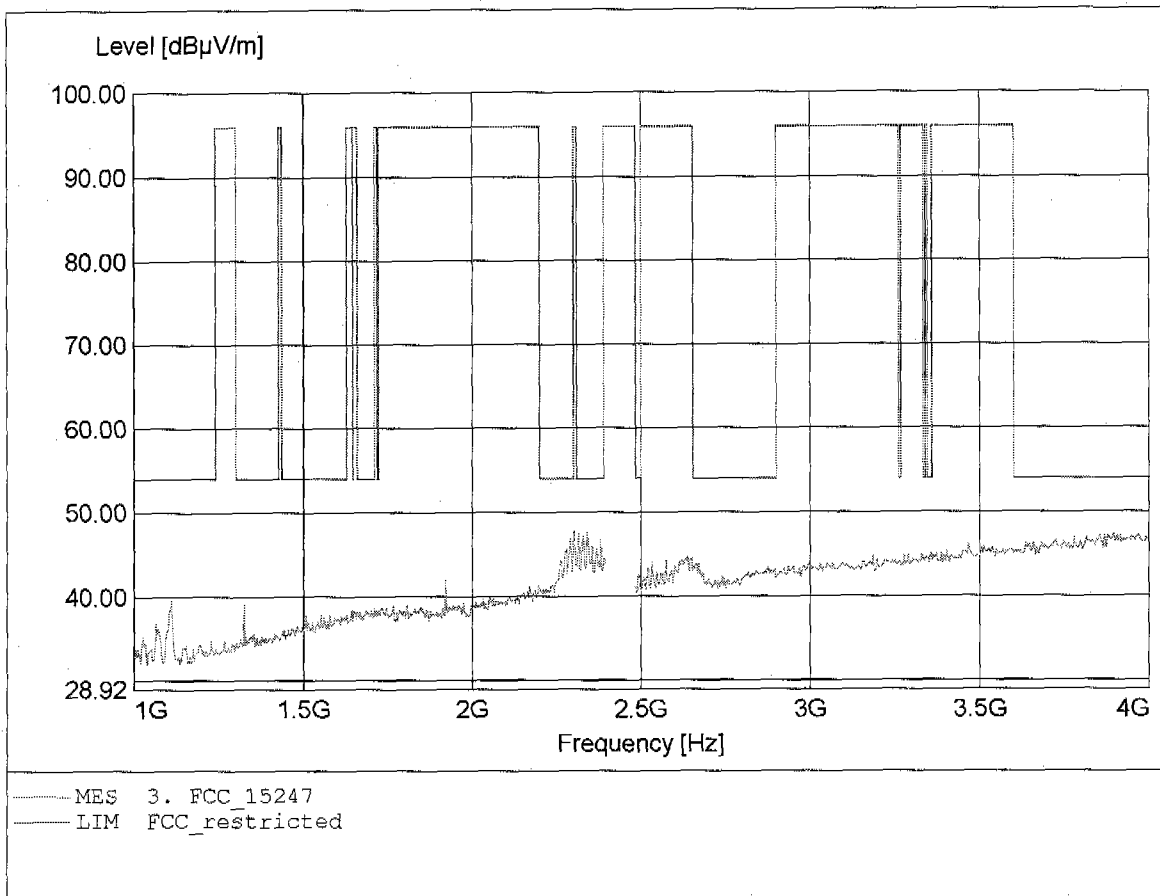


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 47 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 4.882GHz, Emax: 53.27dBµV/m, RBW: 1MHz

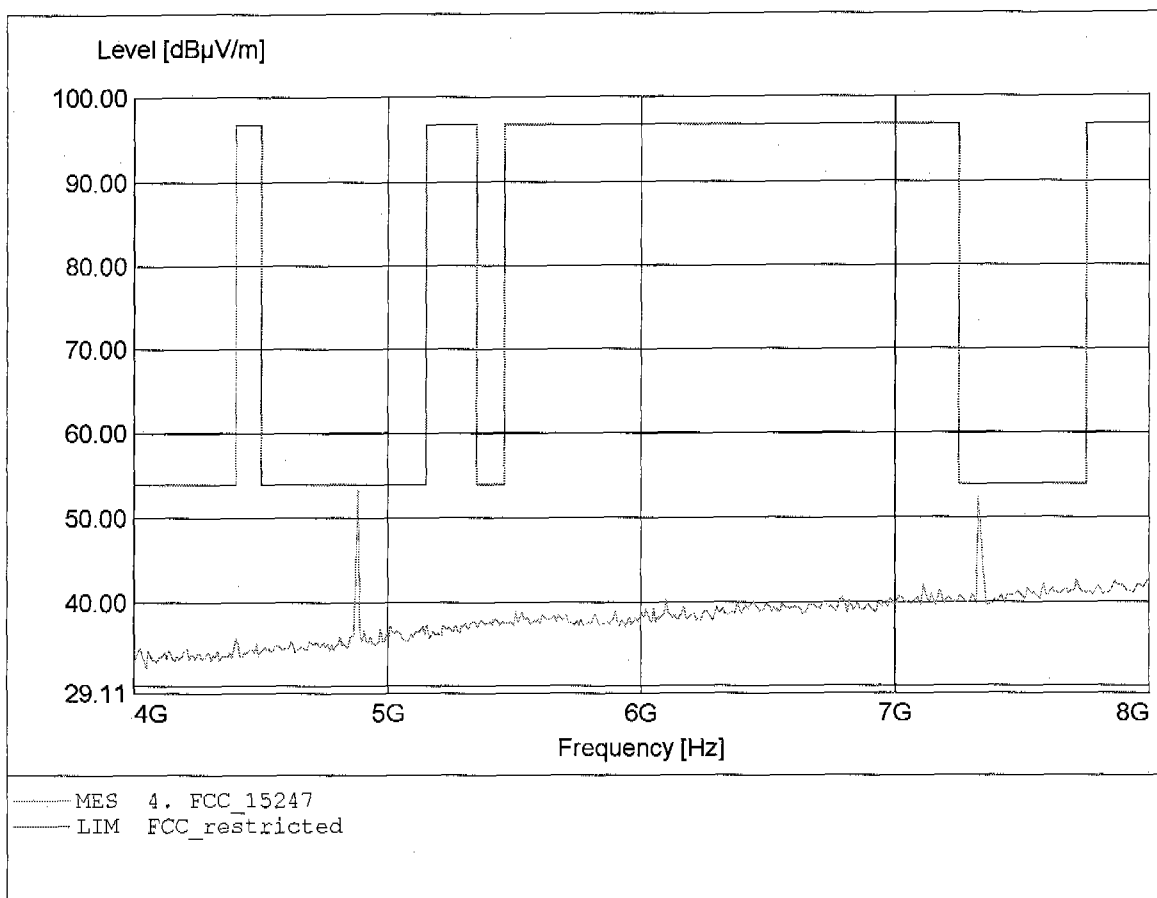


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 47 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 7.327GHz, Emax: 50.82dBµV/m, RBW: 1MHz

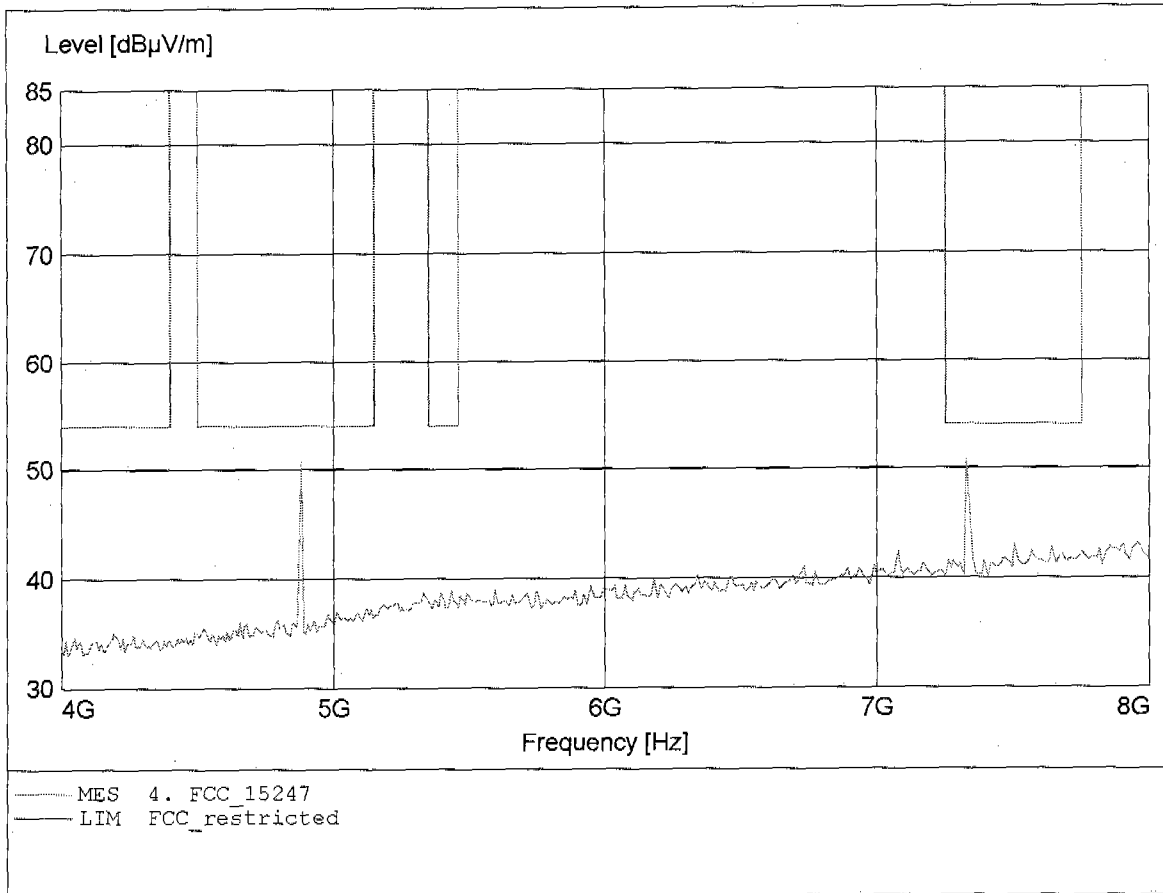

**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**


Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 47 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 9.764GHz, Emax: 52.99dBµV/m, RBW: 1MHz

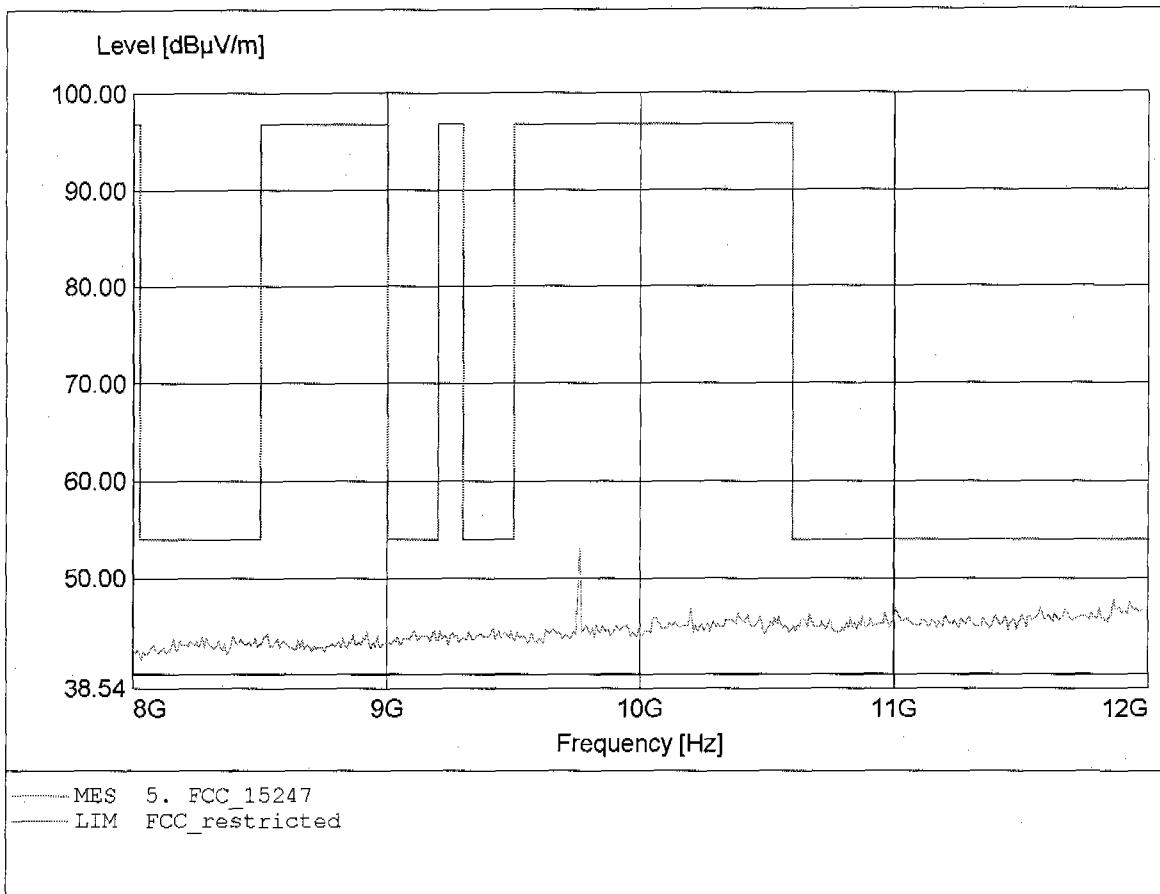




**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 47 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 9.764GHz, Emax: 52.01dBµV/m, RBW: 1MHz

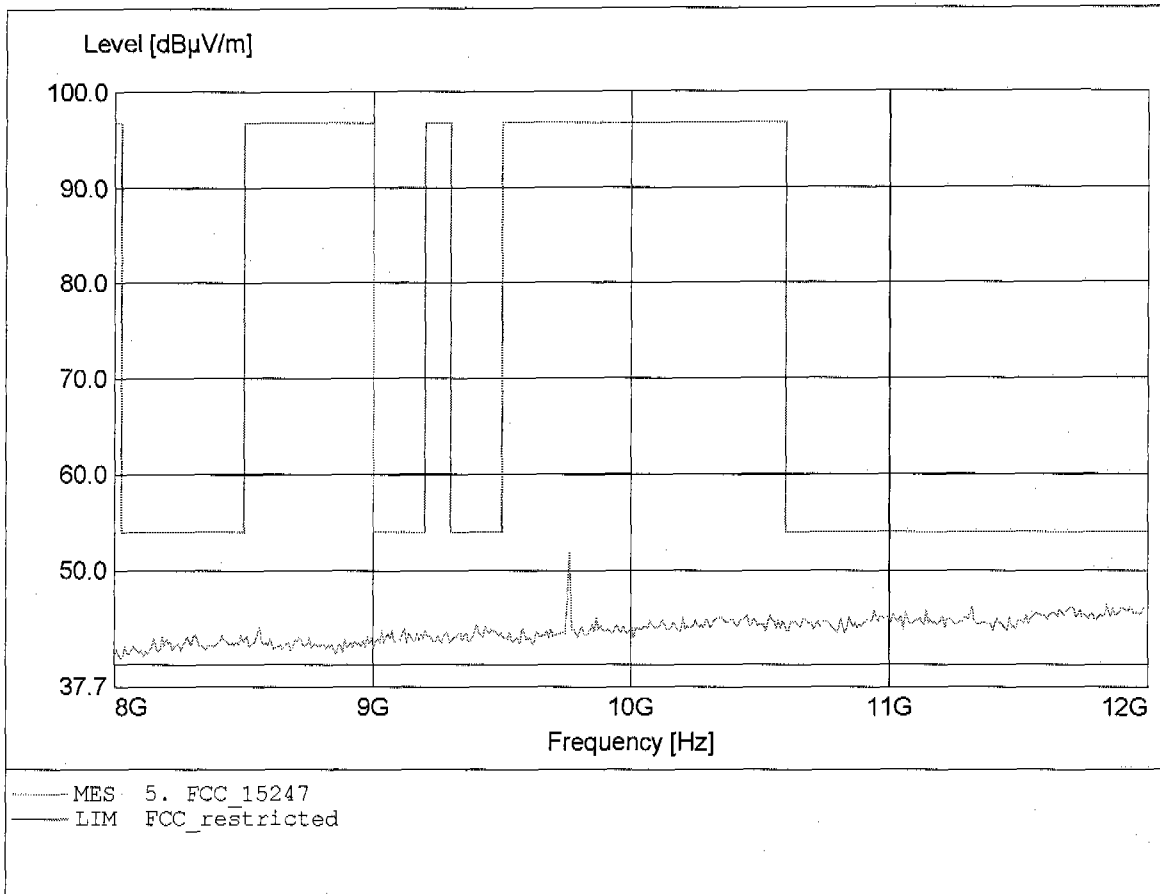


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 47 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 14.802GHz, Emax: 51.80dBµV/m, RBW: 1MHz

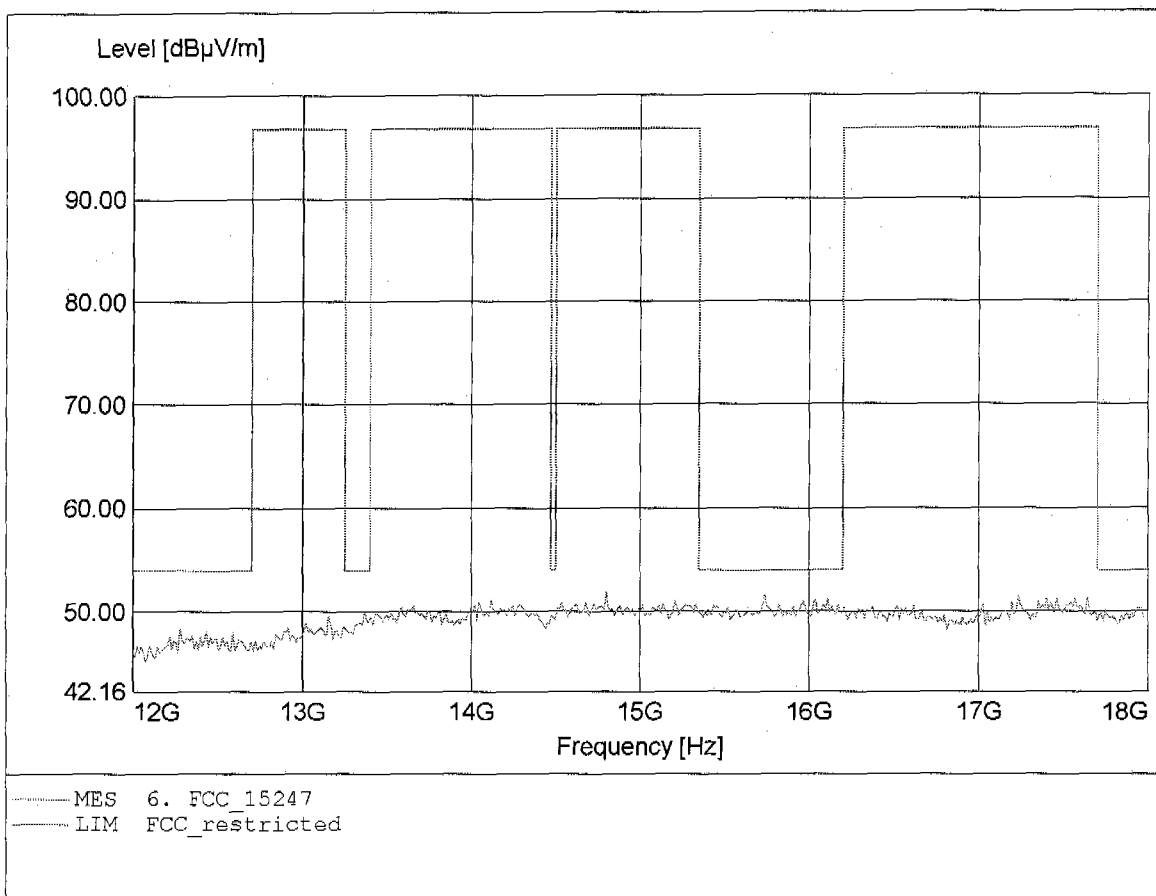


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 47 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 15.956GHz, Emax: 51.67dBµV/m, RBW: 1MHz

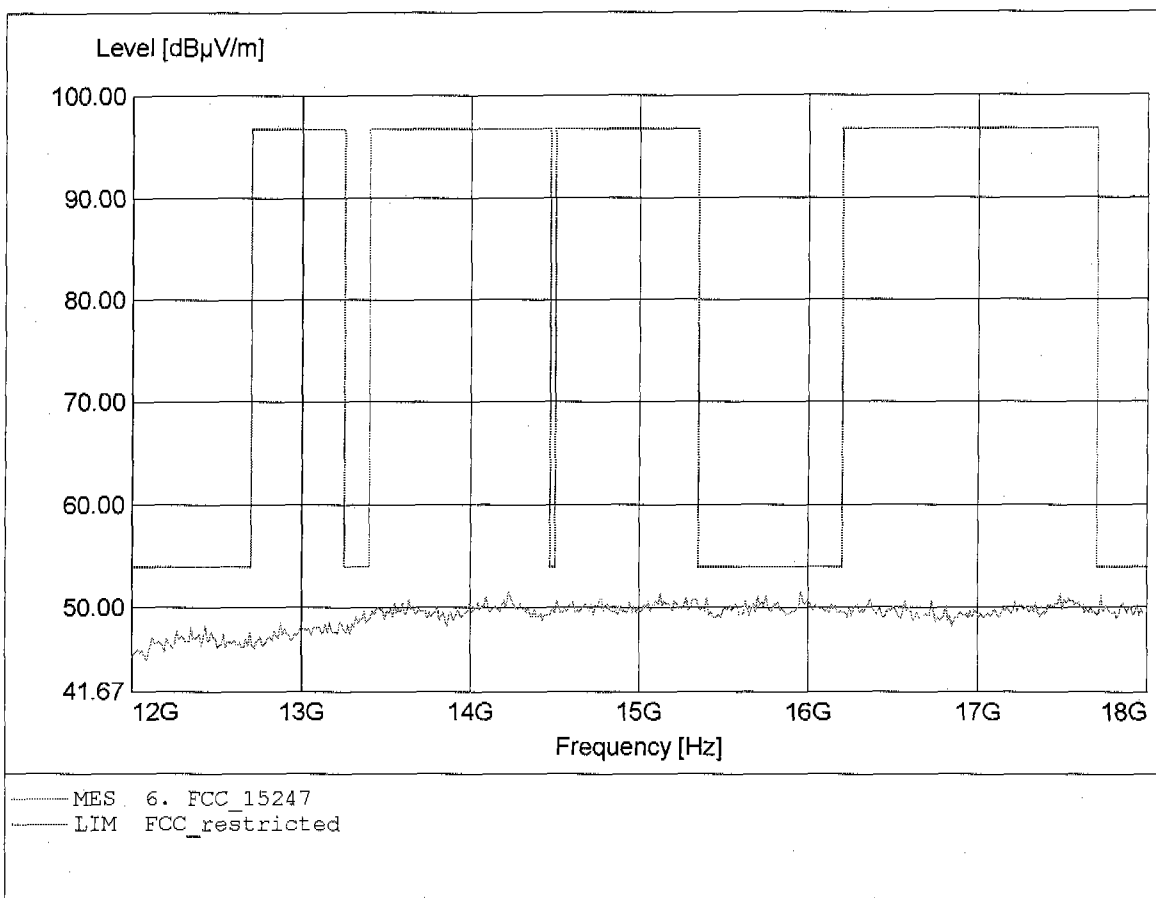


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 47 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 26.193GHz, Emax: 50.03dBµV/m, RBW: 1MHz

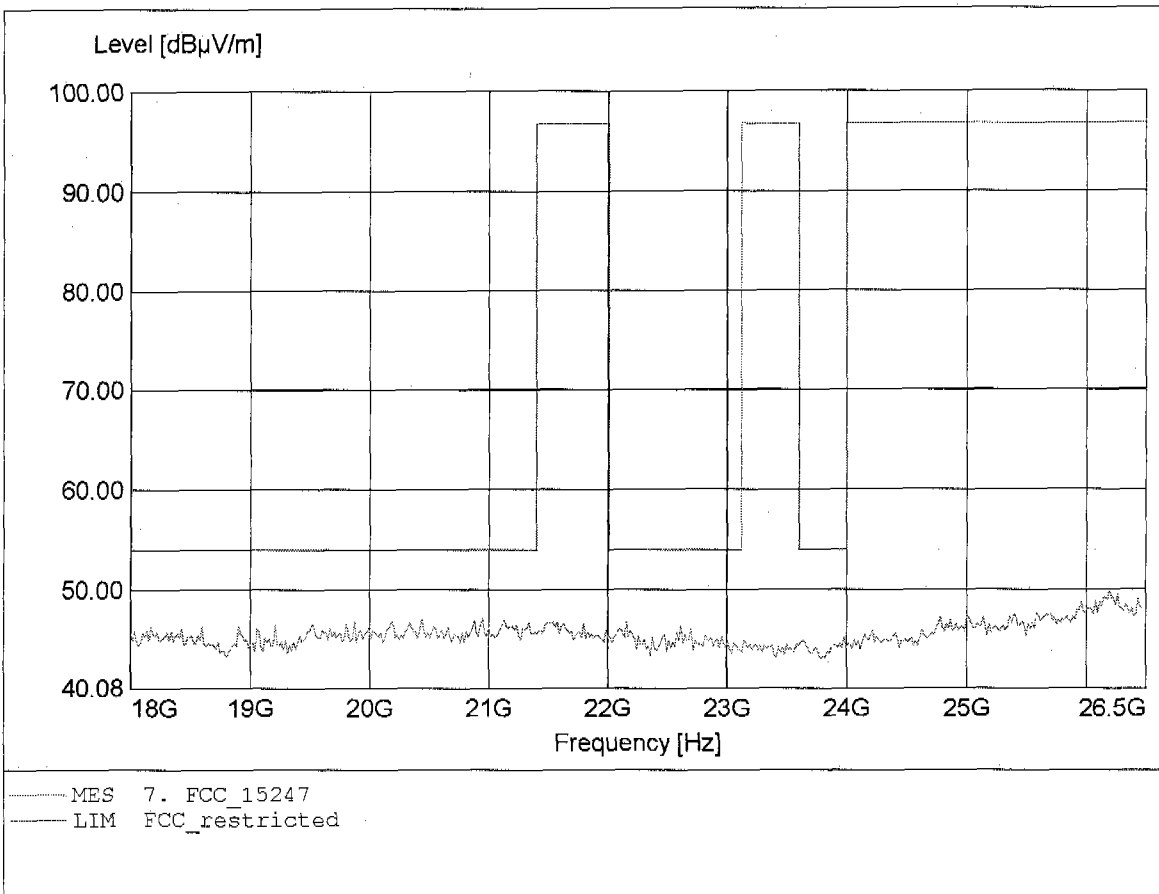


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 47 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 26.227GHz, Emax: 49.61dBµV/m, RBW: 1MHz

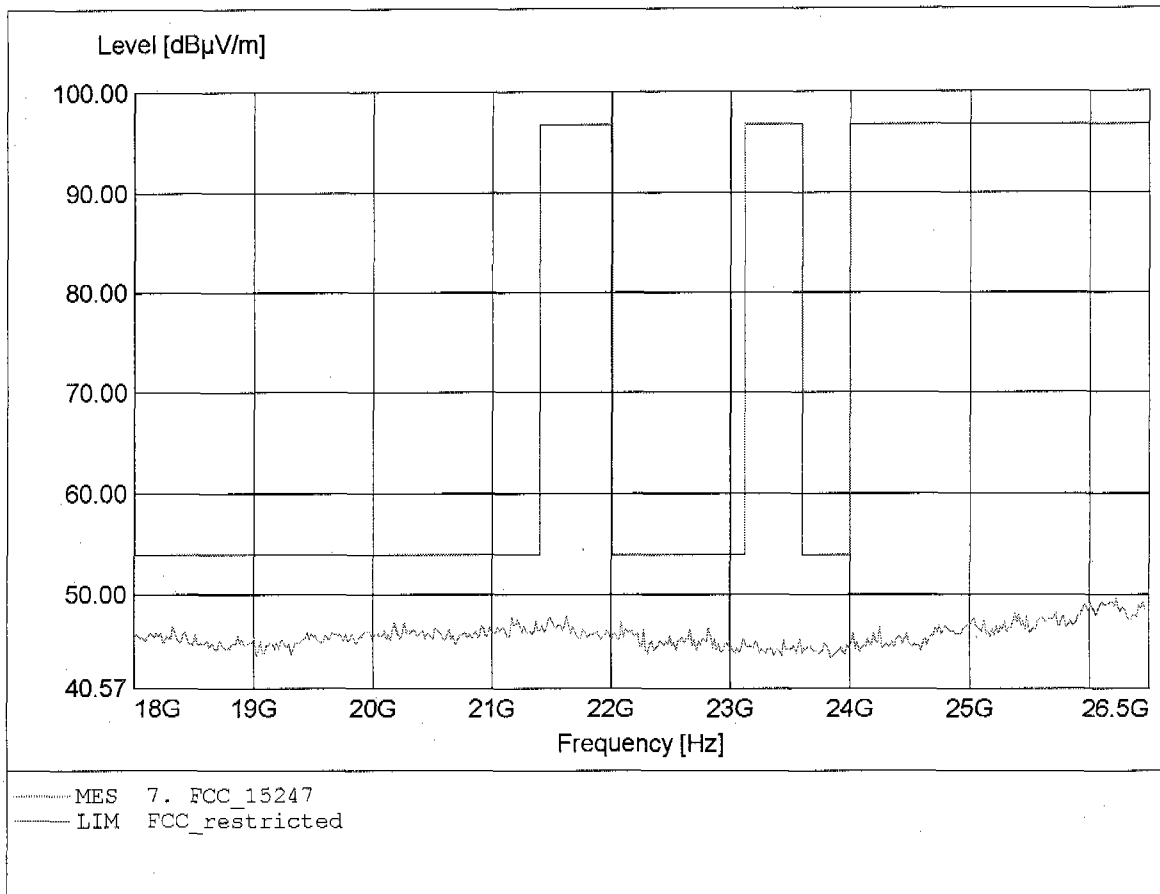


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 190.802MHz, Emax: 31.72dBµV/m, RBW: 100kHz

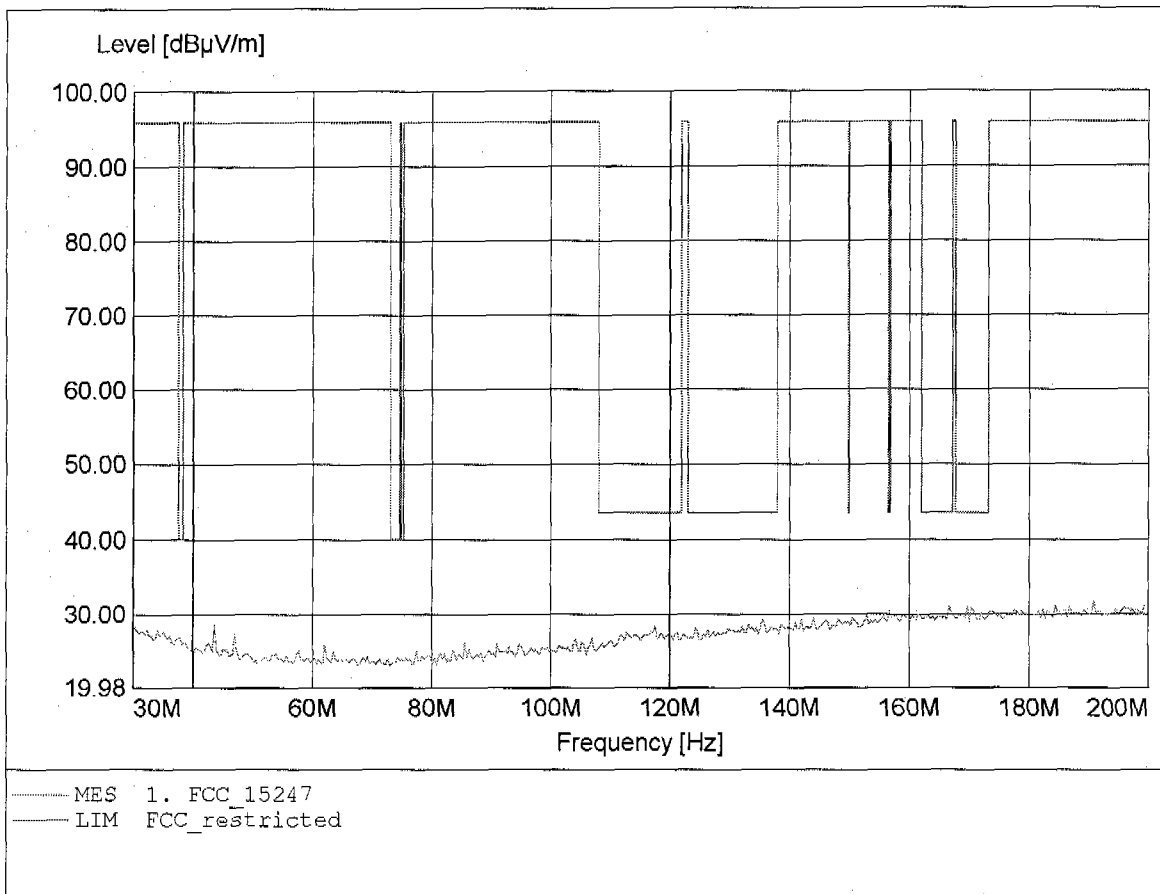


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 176.493MHz, Emax: 31.76dBµV/m, RBW: 100kHz

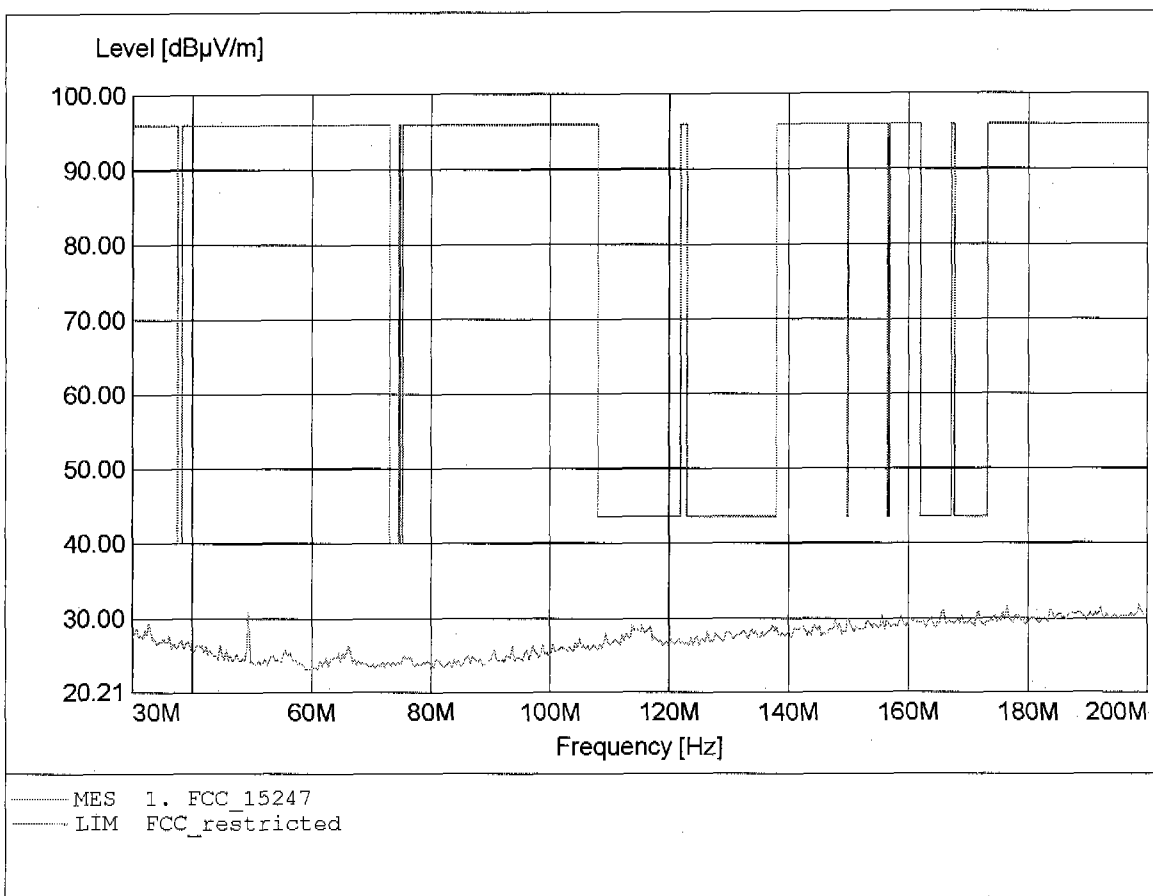

**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**


Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Comment 2: Freq: 560.721MHz, Emax: 40.20dBµV/m, RBW: 100kHz

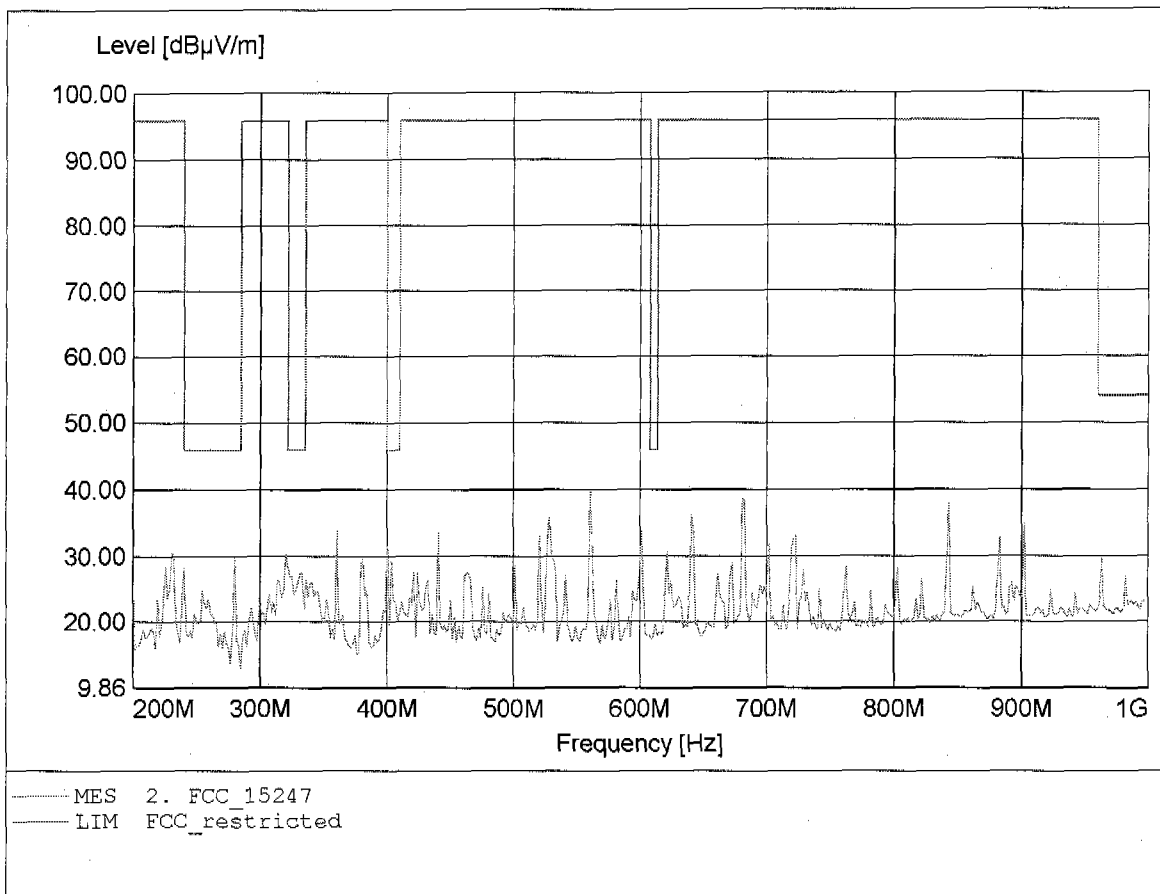




**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Comment 2: Freq: 842.886MHz, Emax: 39.84dBµV/m, RBW: 100kHz

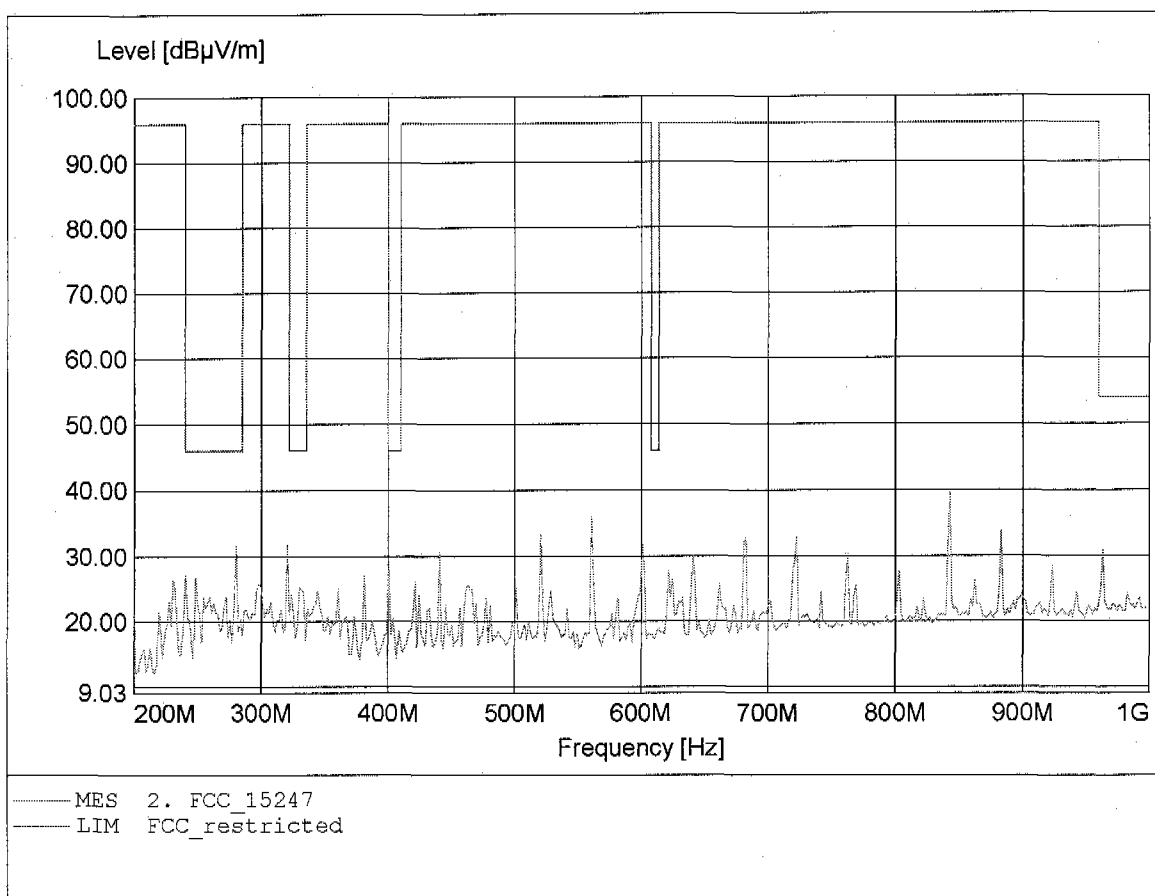


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 2.484GHz, Emax: 101.55dBµV/m, RBW: 1MHz

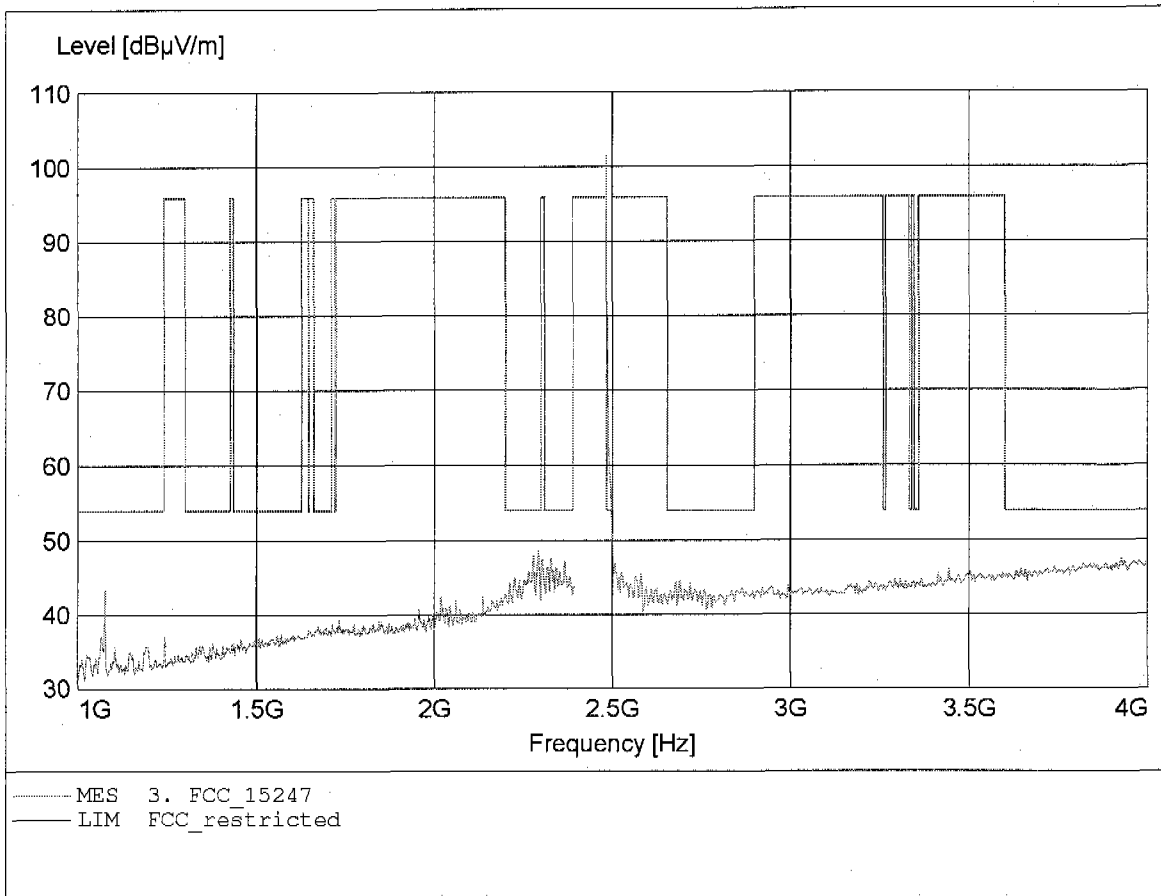


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 2.484GHz, Emax: 101.55dBµV/m, RBW: 1MHz

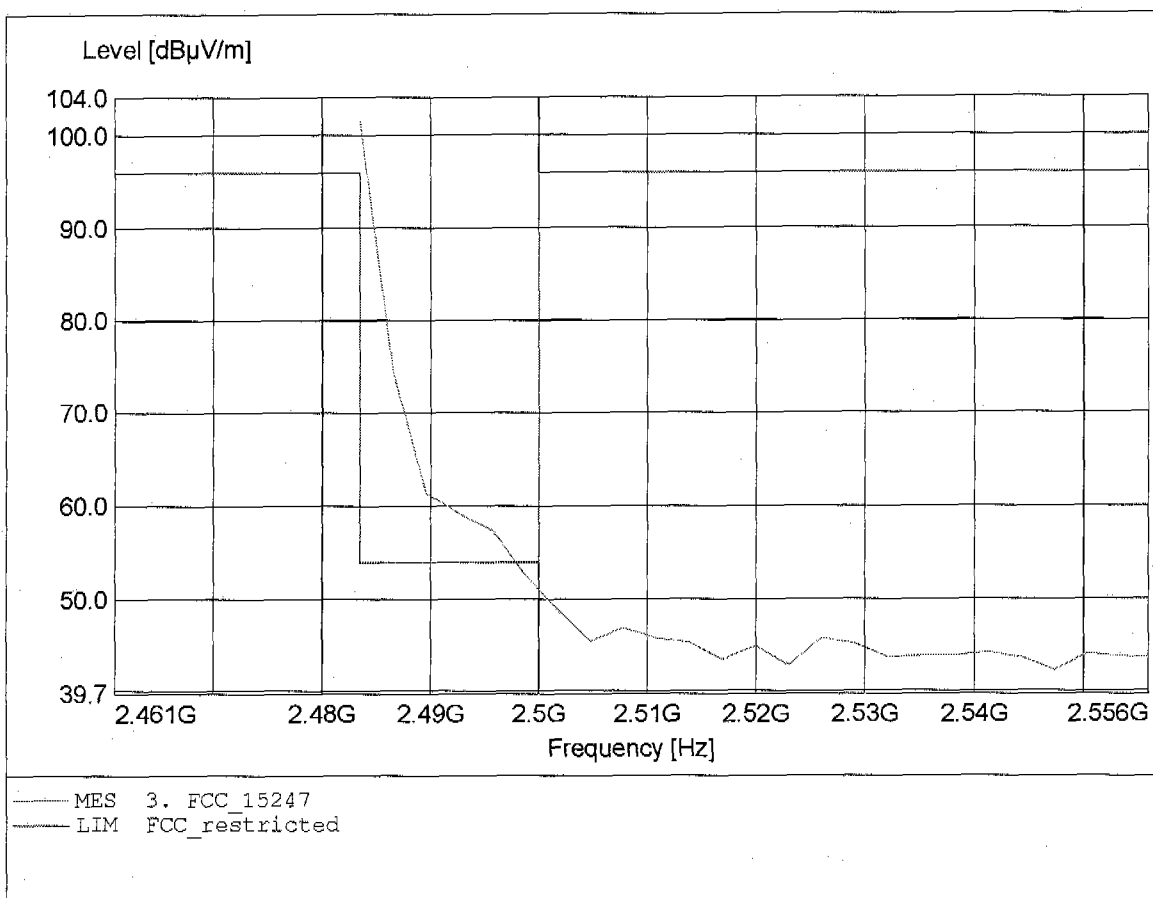


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247, average detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 2.484GHz, Emax: 93.00dBµV/m, RBW: 1MHz

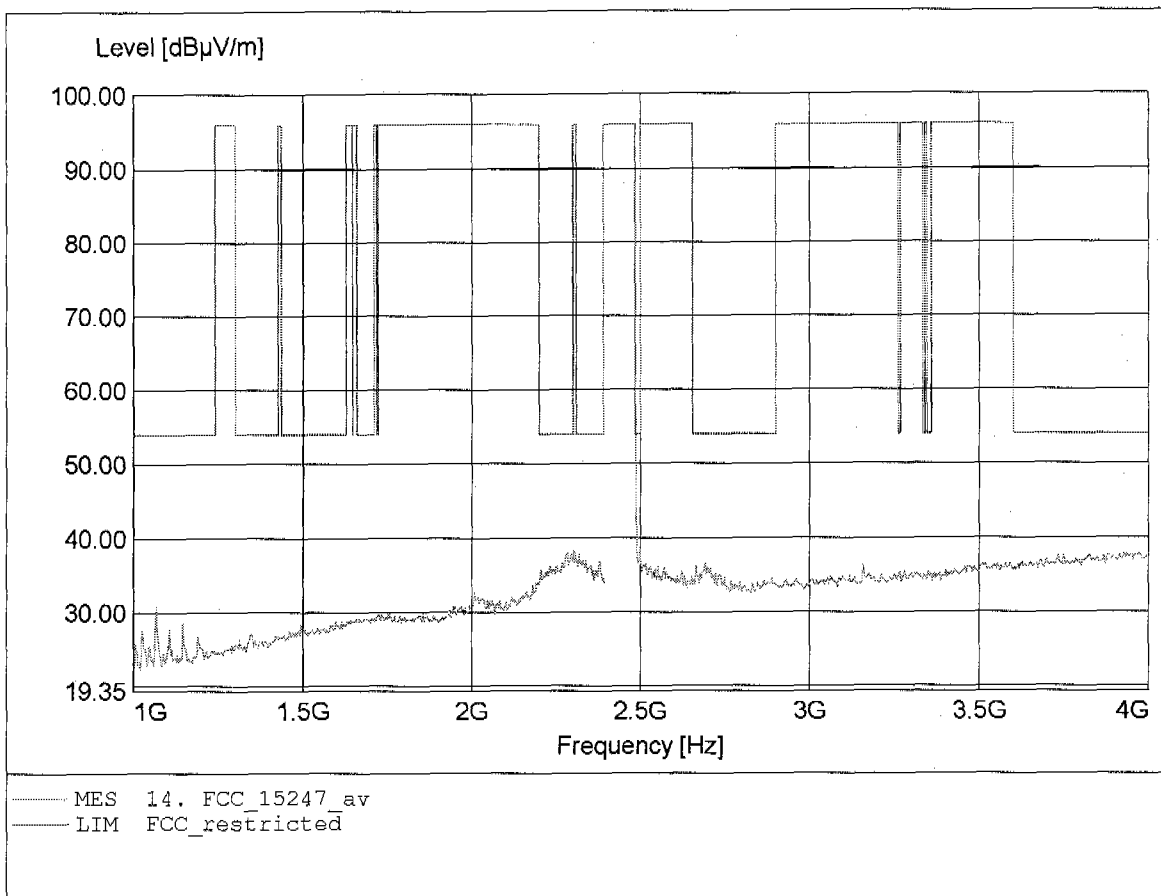


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
 EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 1  
 Model: GN Ellipse 2.4  
 Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
 Test Site / Operator: ETS / Mr. Handrik  
 Test Specification: according to §15.247, average detector  
 Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
 Comment 2: Freq: 2.484GHz, Emax: 93.00dBµV/m, RBW: 1MHz

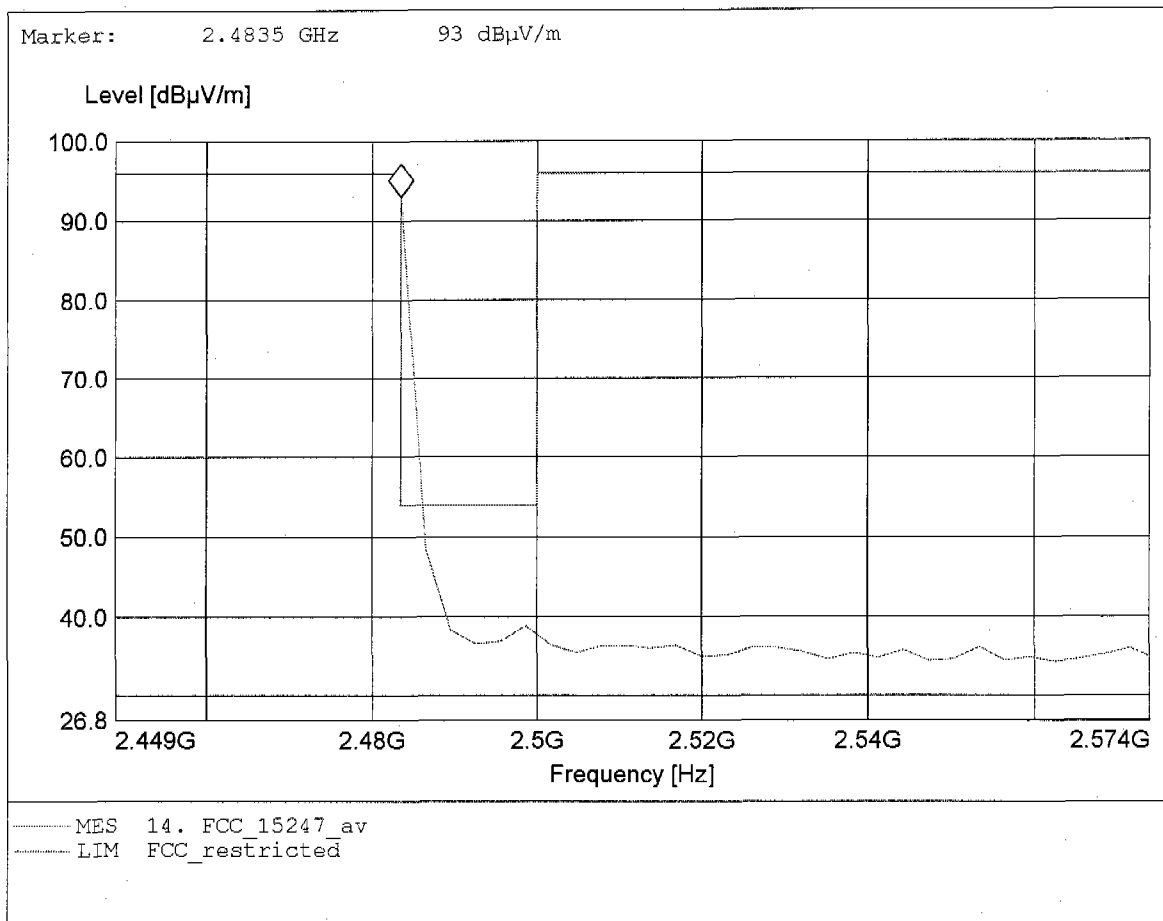


**Spurious emissions Field Strength**  
**FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 2.484GHz, Emax: 98.85dBµV/m, RBW: 1MHz

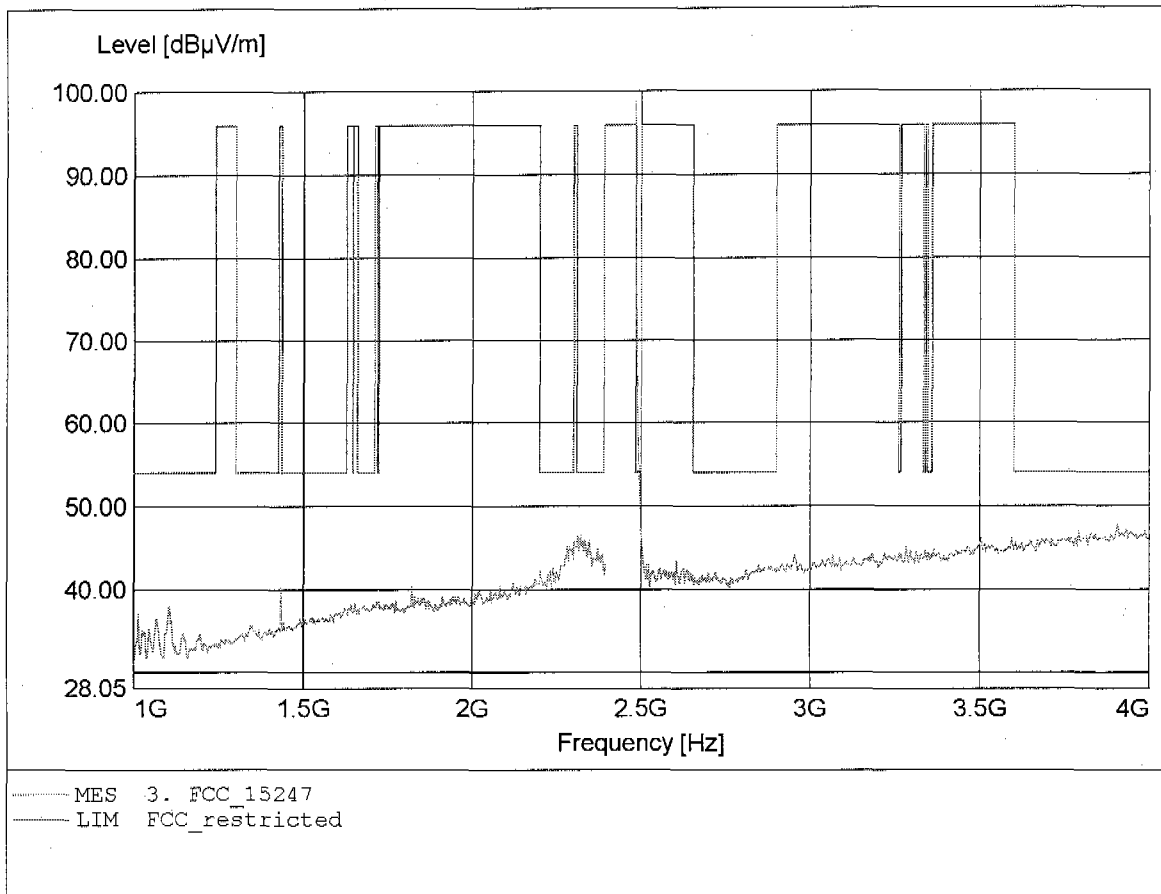


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 2.484GHz, Emax: 98.85dBµV/m, RBW: 1MHz

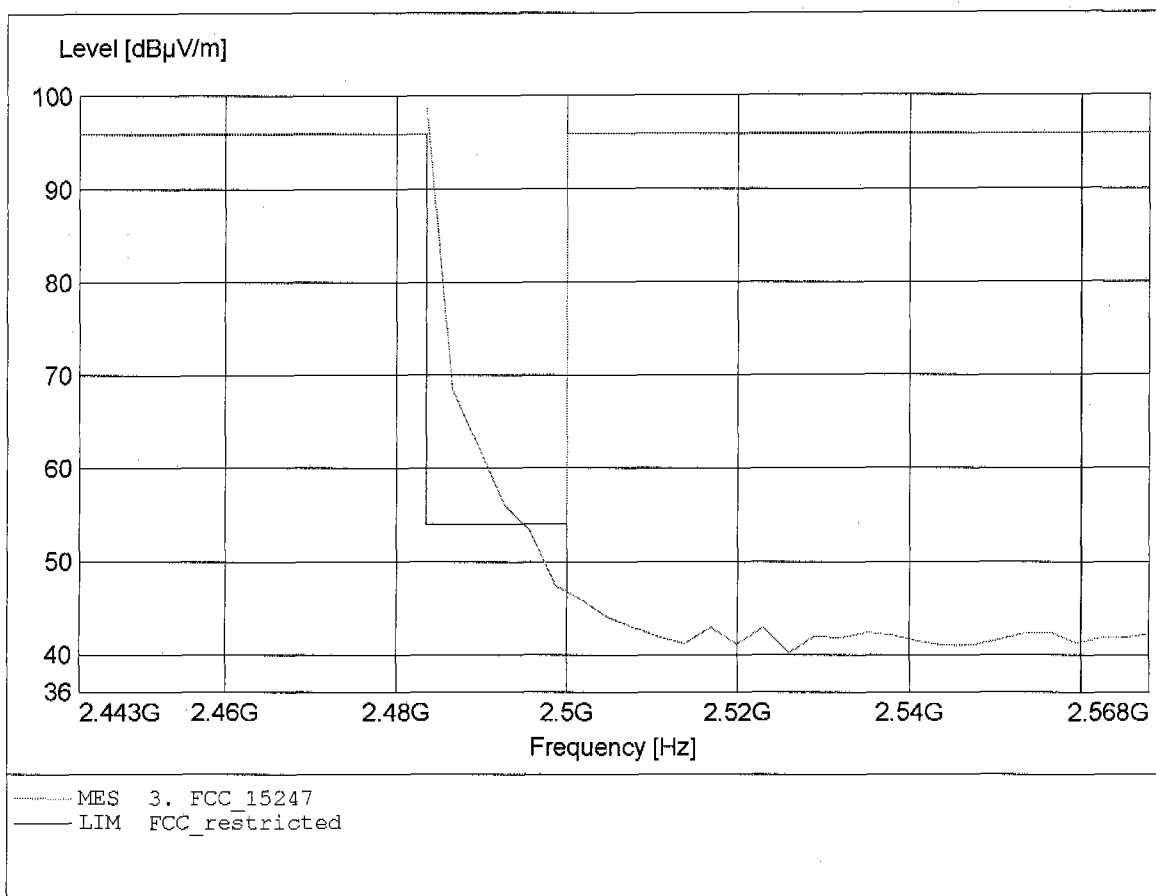

**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**


Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247, average detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 2.484GHz, Emax: 89.56dBµV/m, RBW: 1MHz

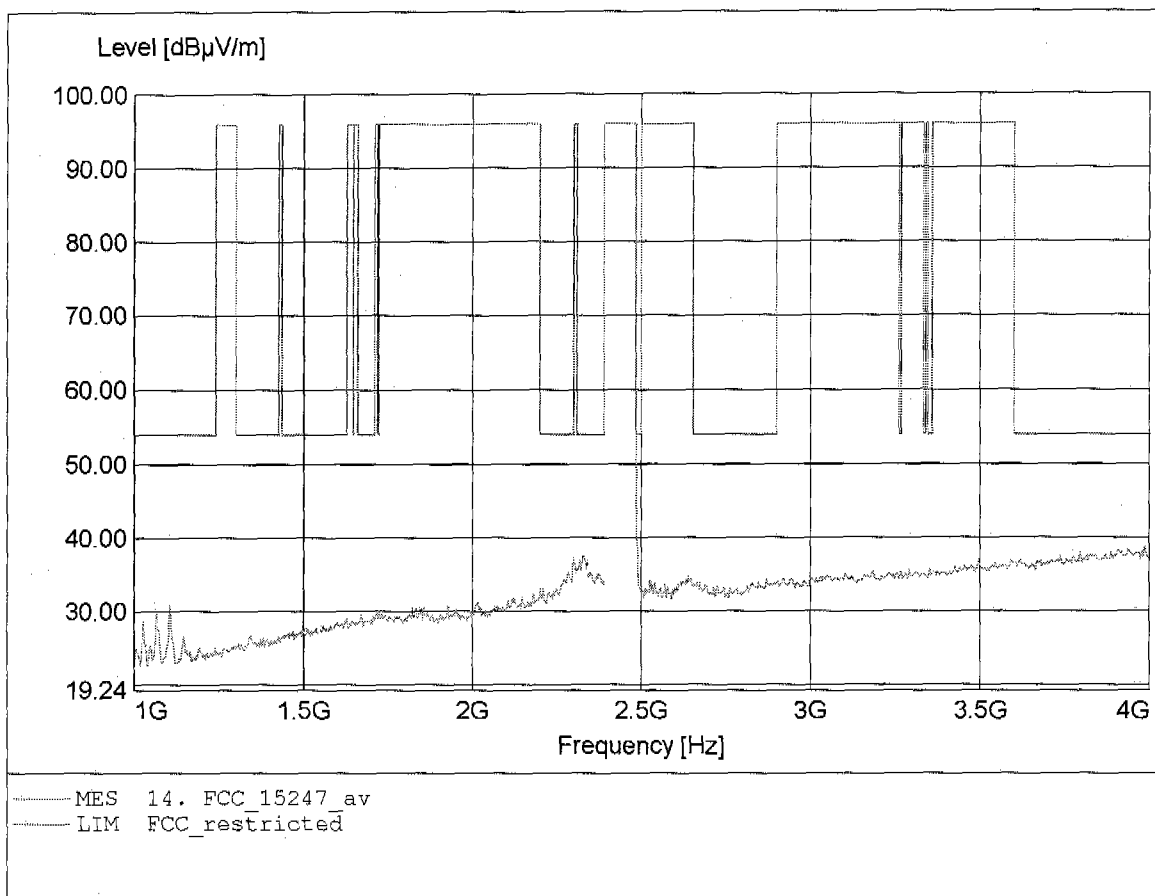




**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247, average detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 2.484GHz, Emax: 89.56dBµV/m, RBW: 1MHz

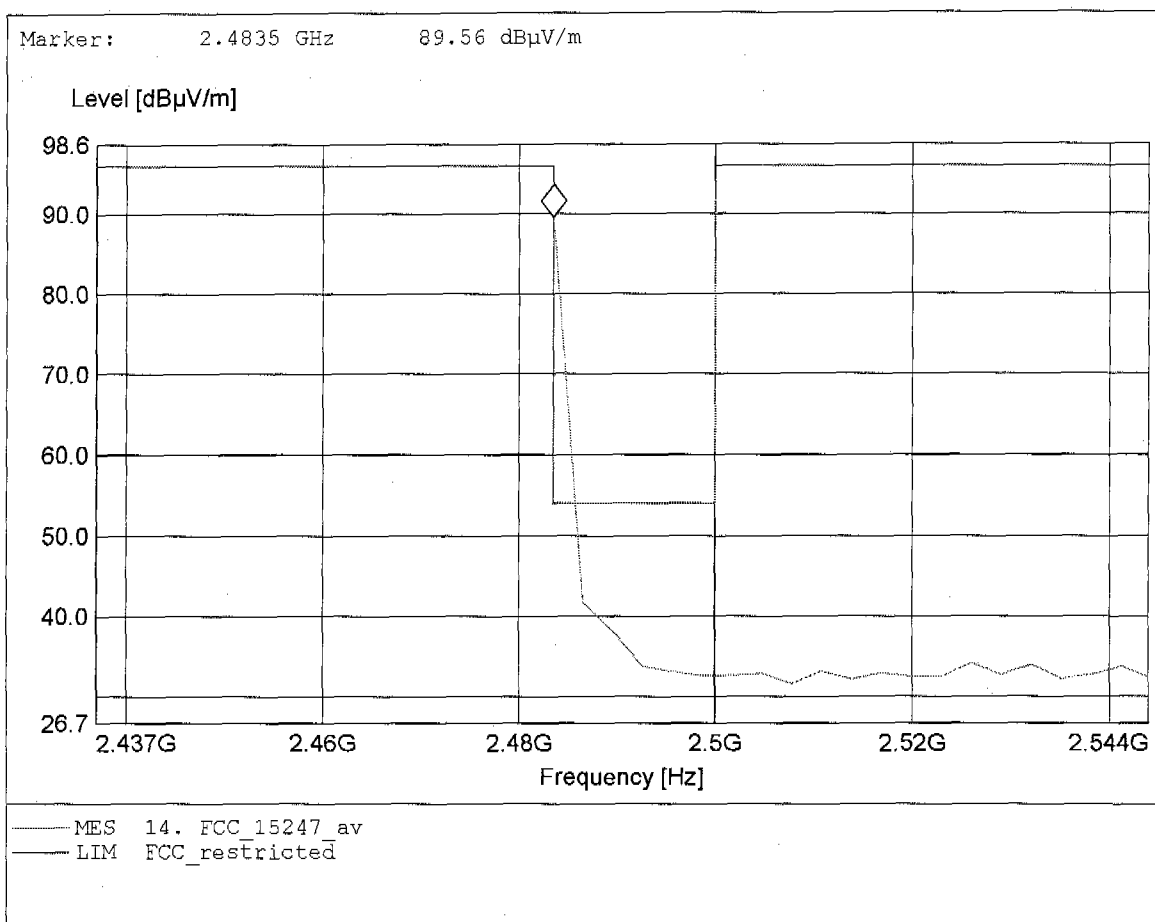


**Spurious emissions Field Strength**  
**FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 7.447GHz, Emax: 67.72dBµV/m, RBW: 1MHz

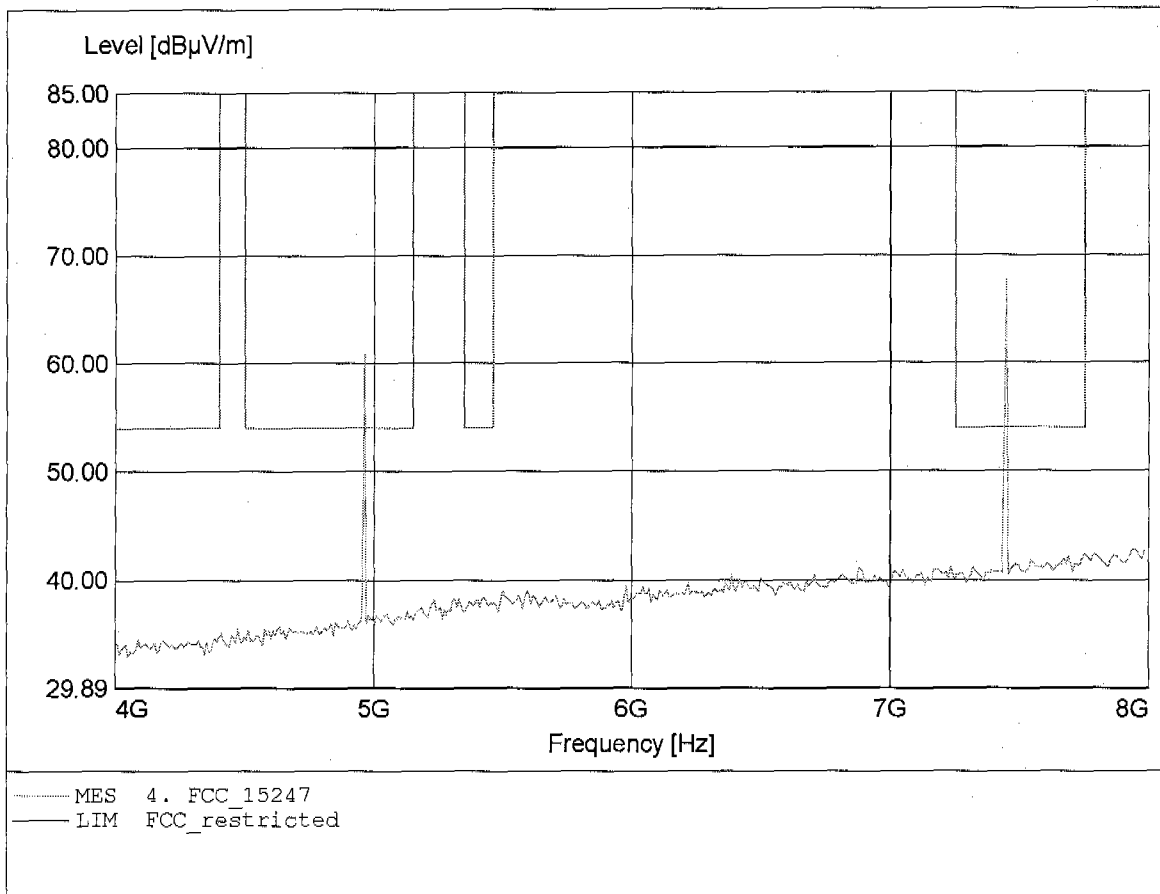


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247, average detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 7.447GHz, Emax: 42.83dBµV/m, RBW: 1MHz

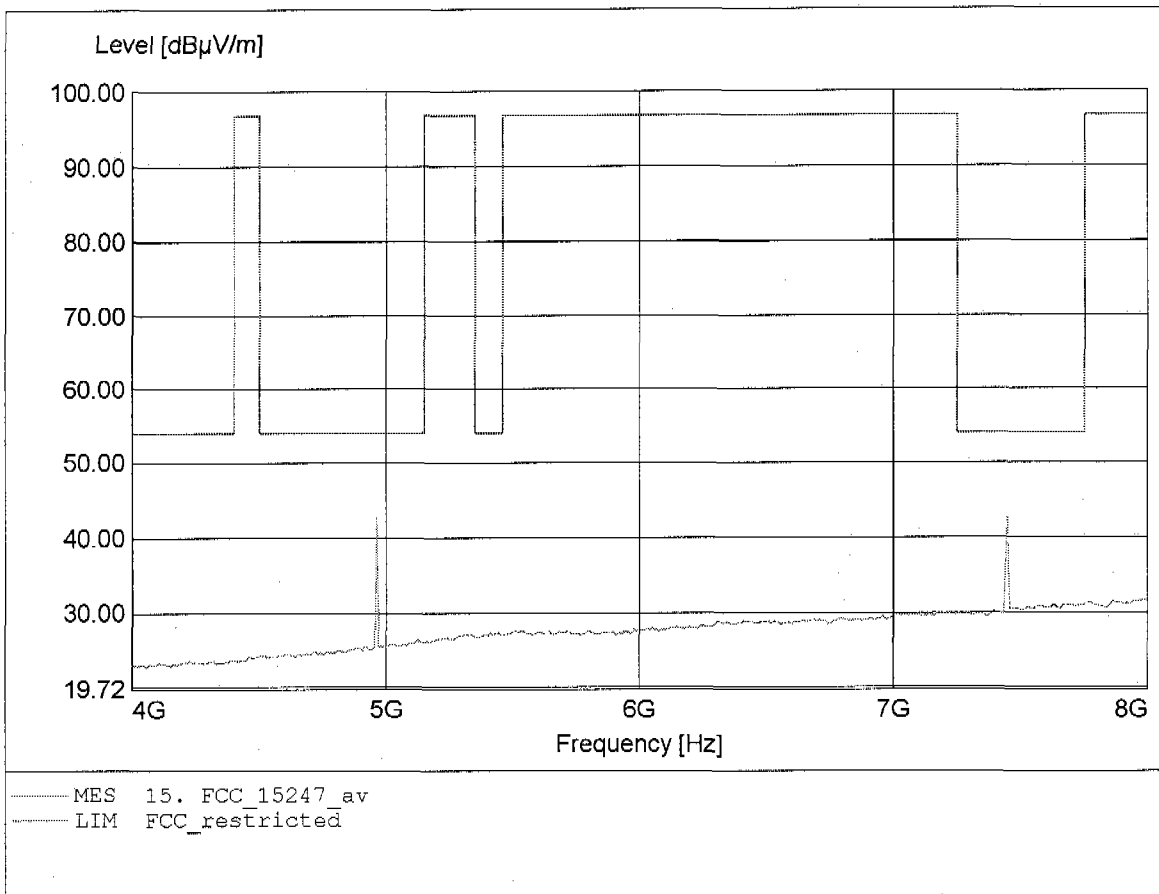


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 4.962GHz, Emax: 65.12dBµV/m, RBW: 1MHz

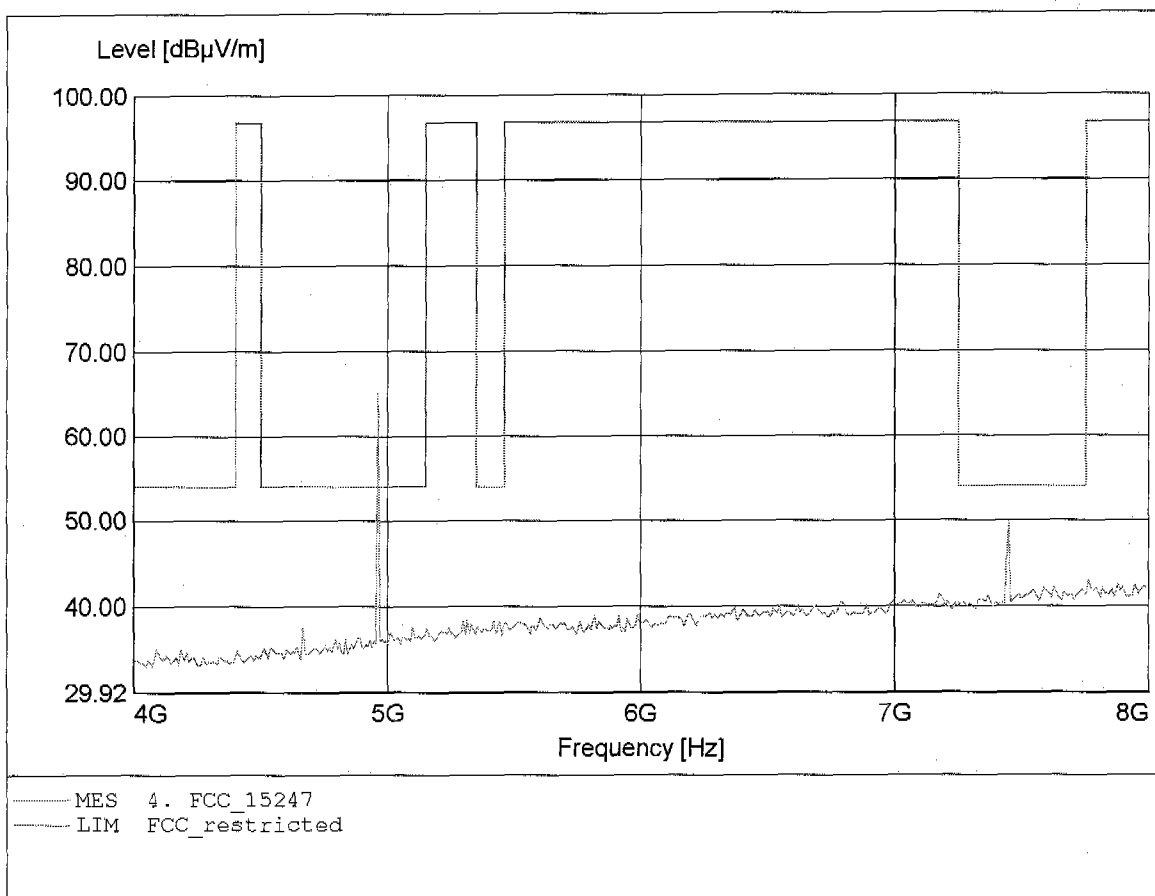


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247, average detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 4.962GHz, Emax: 36.22dBµV/m, RBW: 1MHz

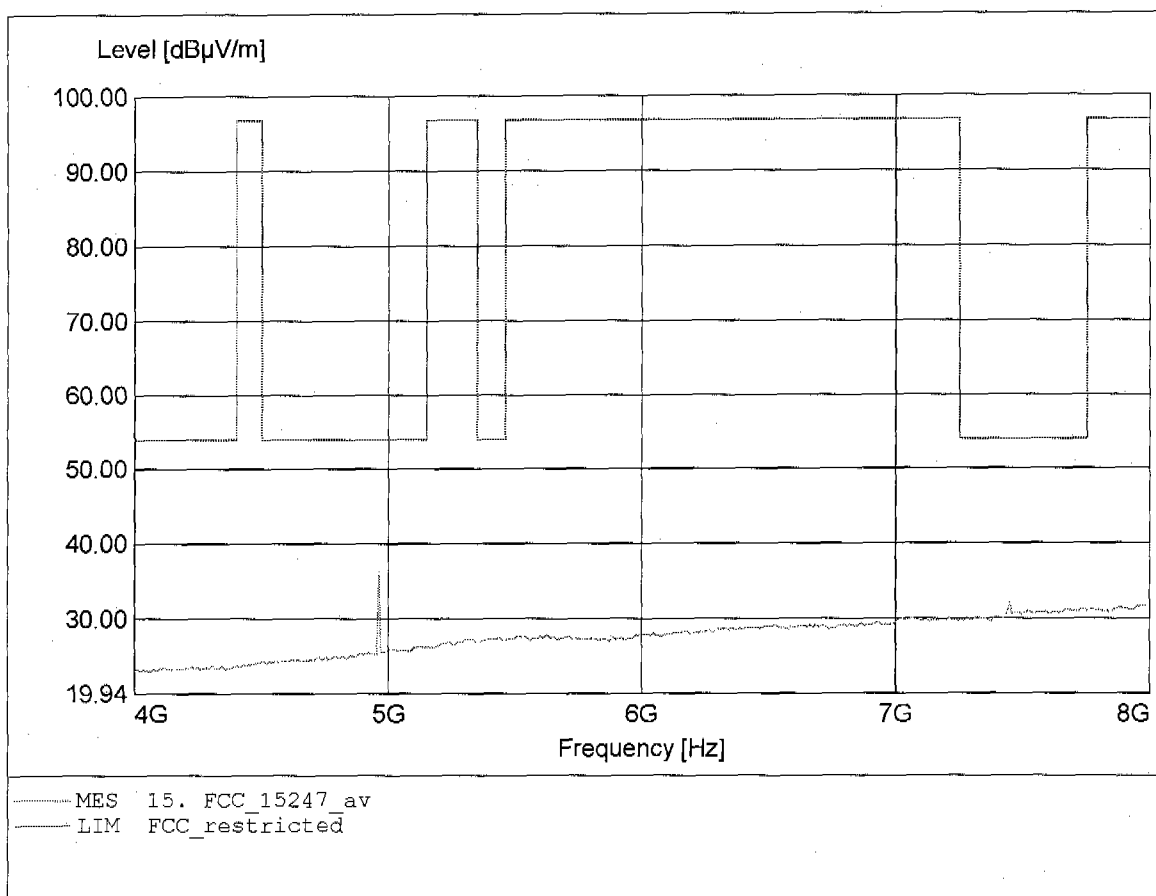


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 9.932GHz, Emax: 57.66dBµV/m, RBW: 1MHz

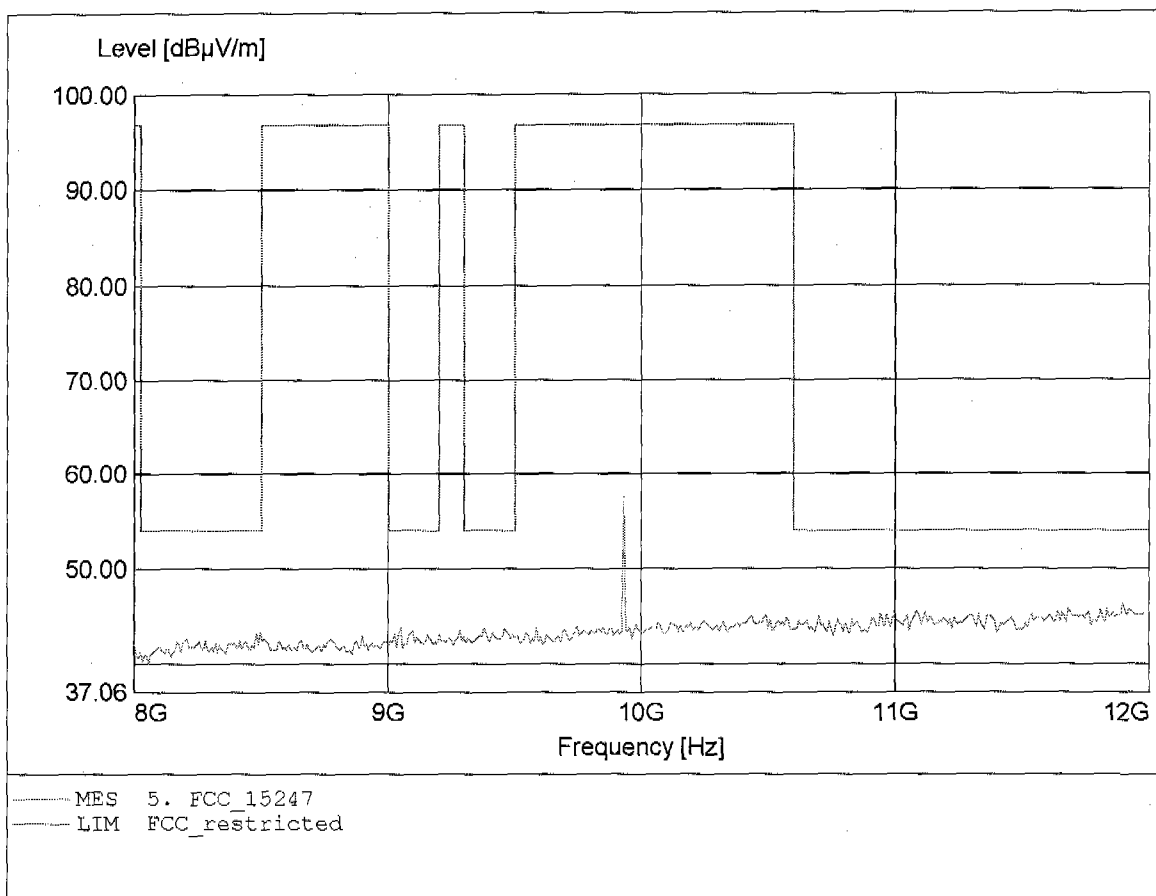


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 9.932GHz, Emax: 56.83dBµV/m, RBW: 1MHz

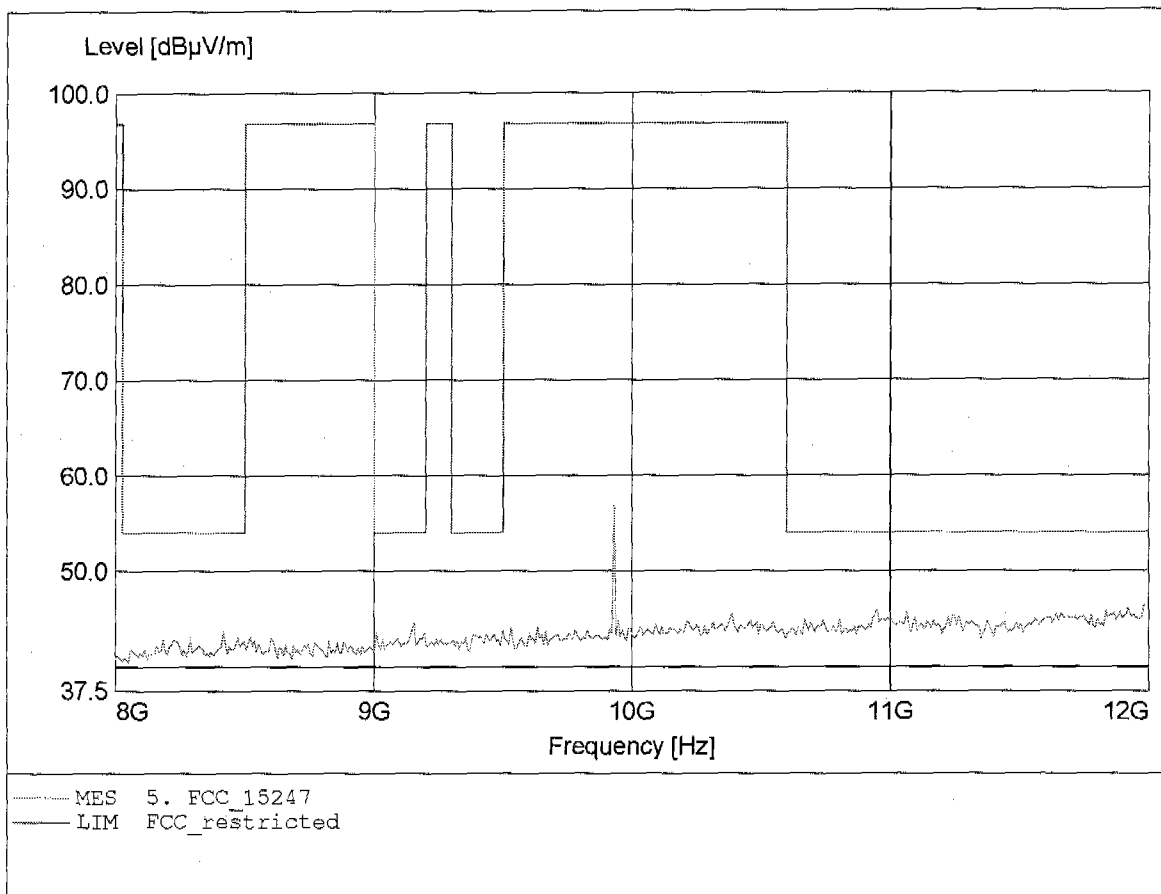

**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**


Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 12.409GHz, Emax: 53.27dBµV/m, RBW: 1MHz

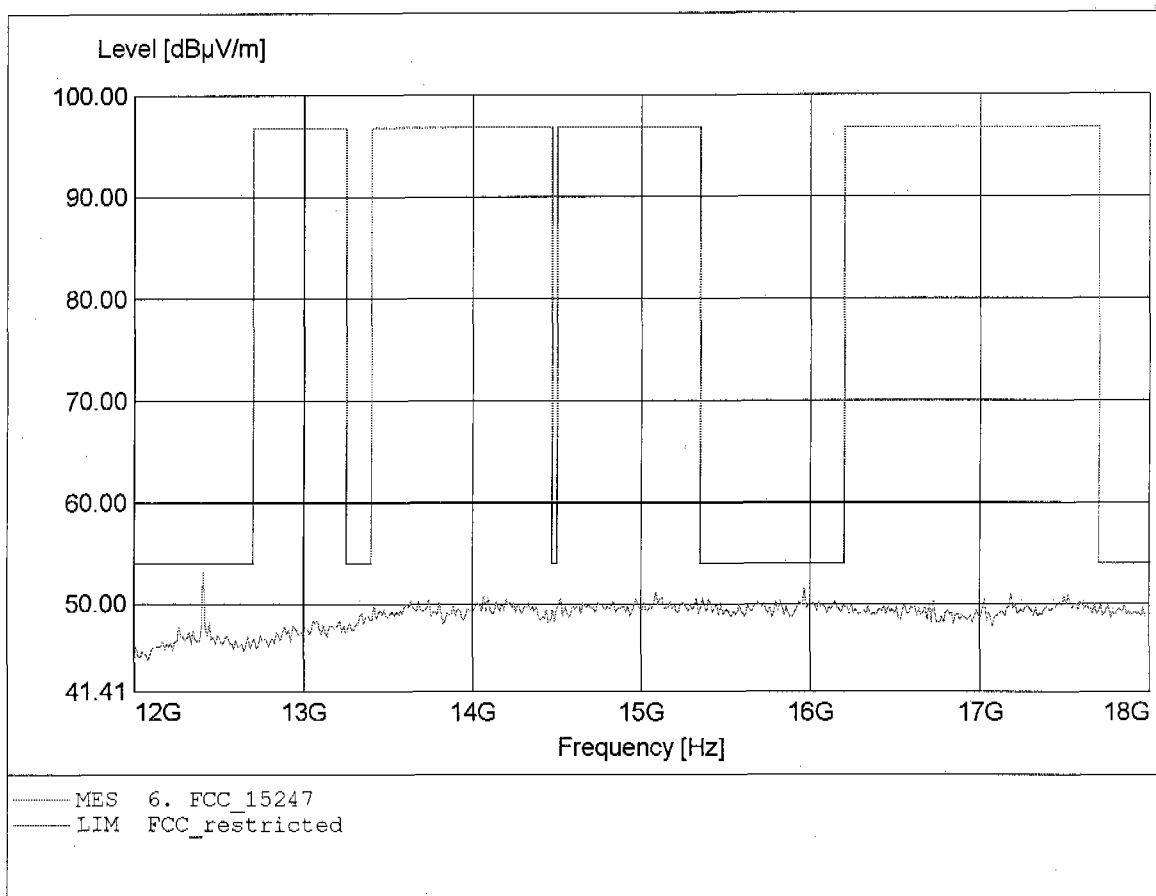




**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 12.409GHz, Emax: 58.92dBµV/m, RBW: 1MHz

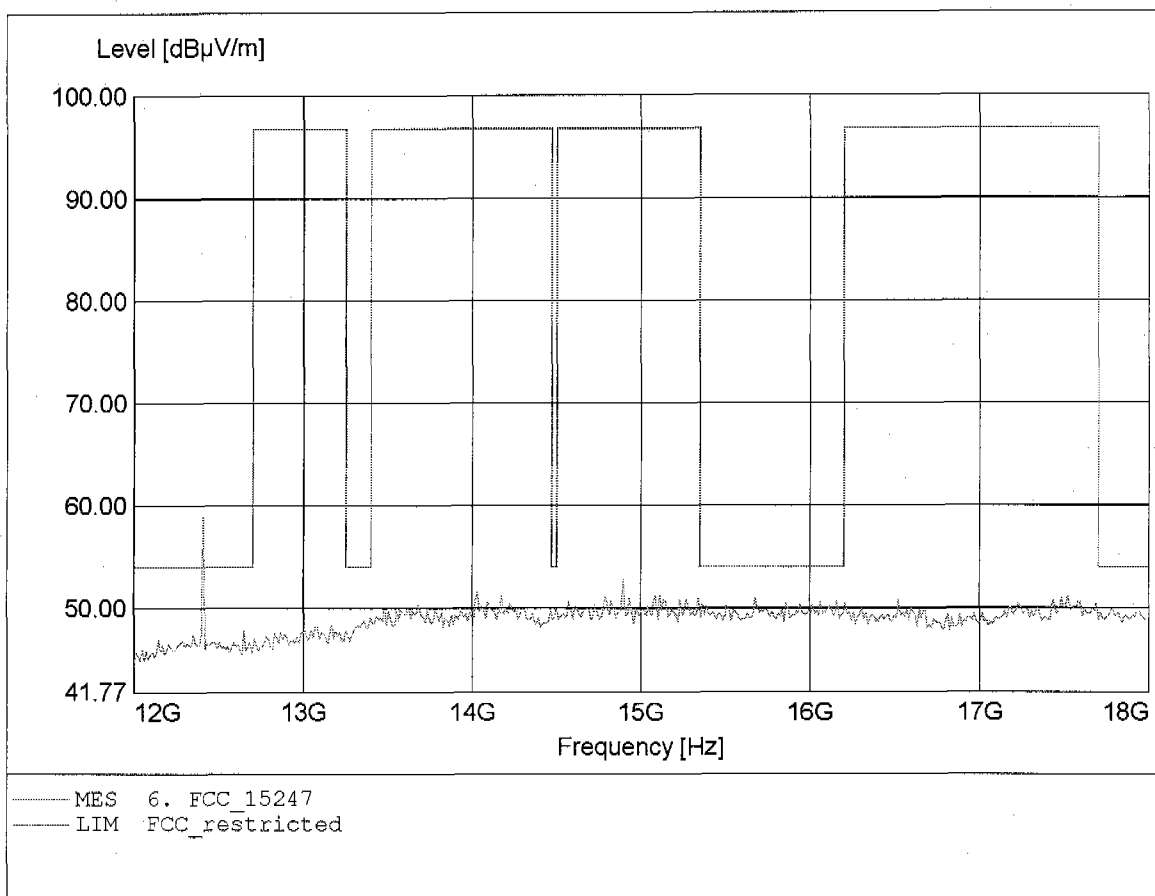


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247, average detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 17.531GHz, Emax: 39.84dBµV/m, RBW: 1MHz

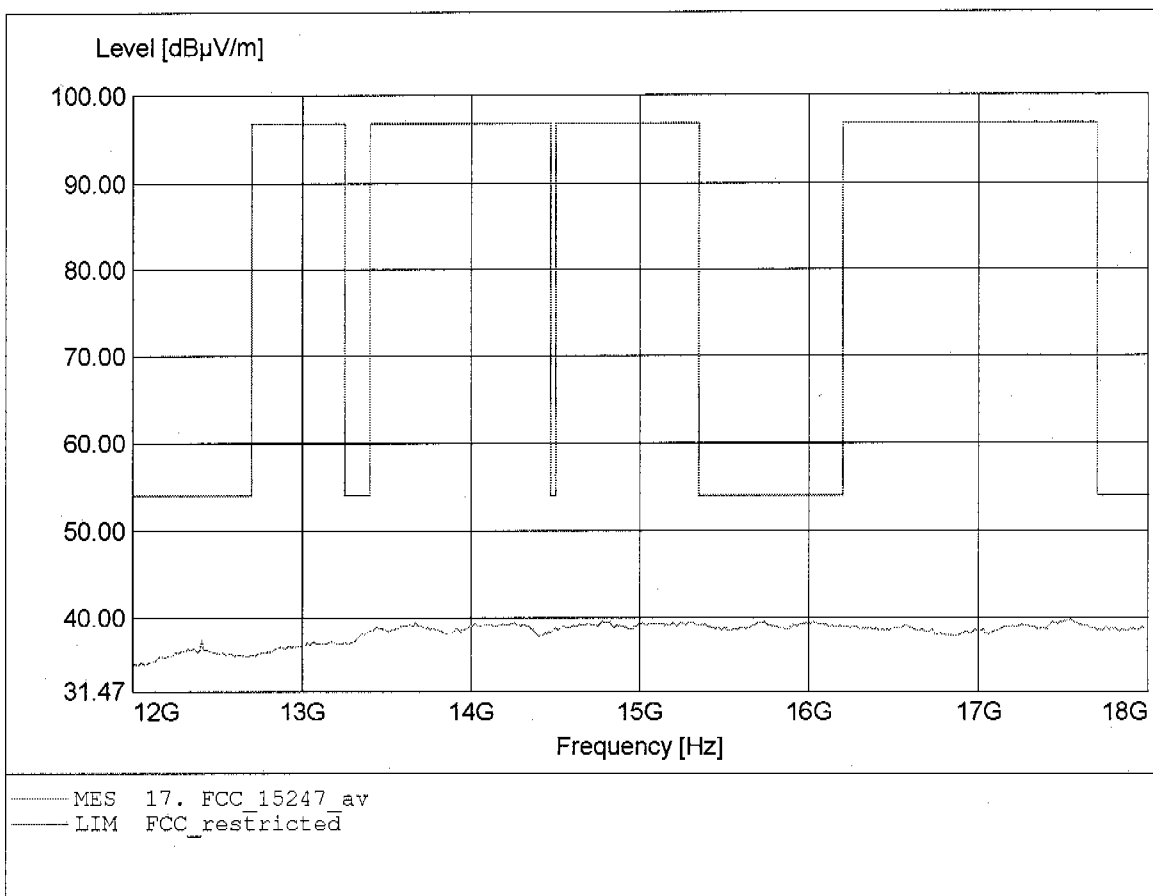

**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 19.550GHz, Emax: 50.25dBµV/m, RBW: 1MHz

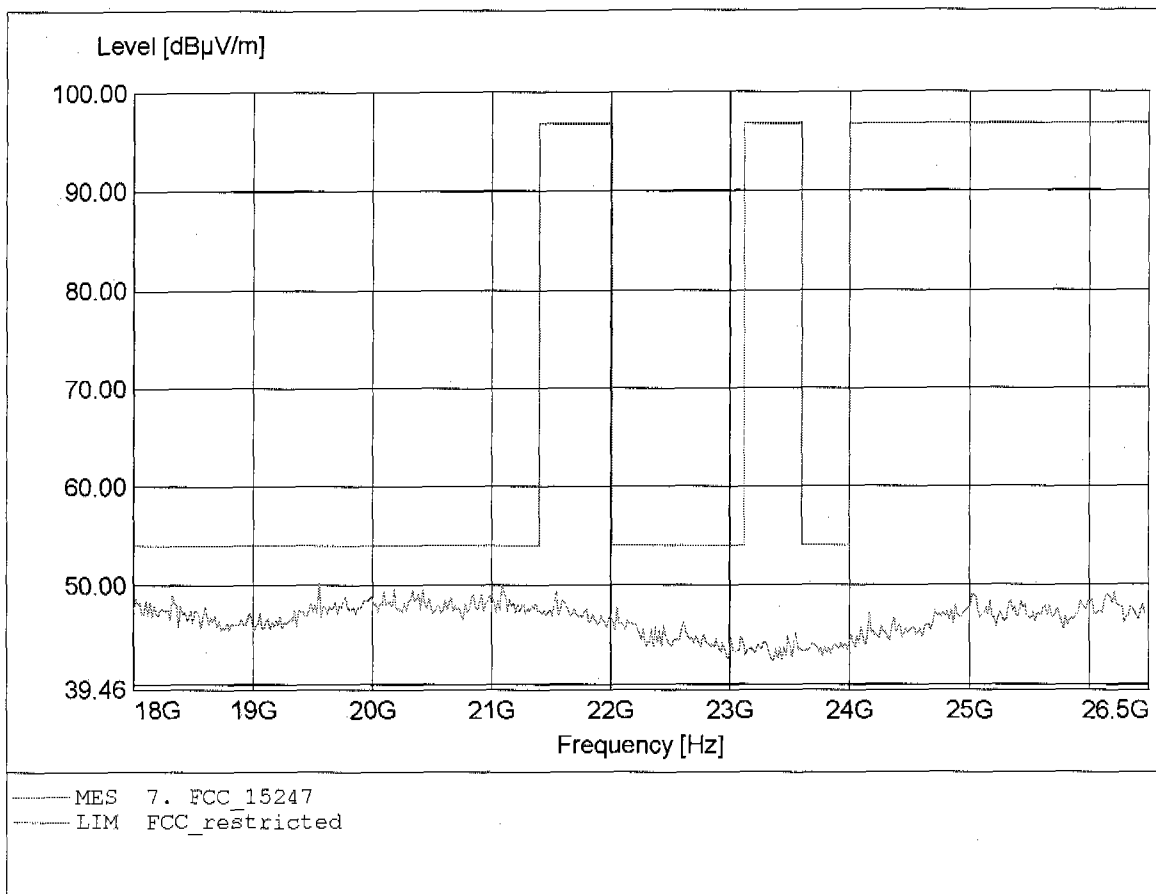

**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S  
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 1  
Model: GN Ellipse 2.4  
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 20.197GHz, Emax: 50.00dBµV/m, RBW: 1MHz

