



**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 45.331MHz, Emax: 38.39dBµV/m, RBW: 100kHz

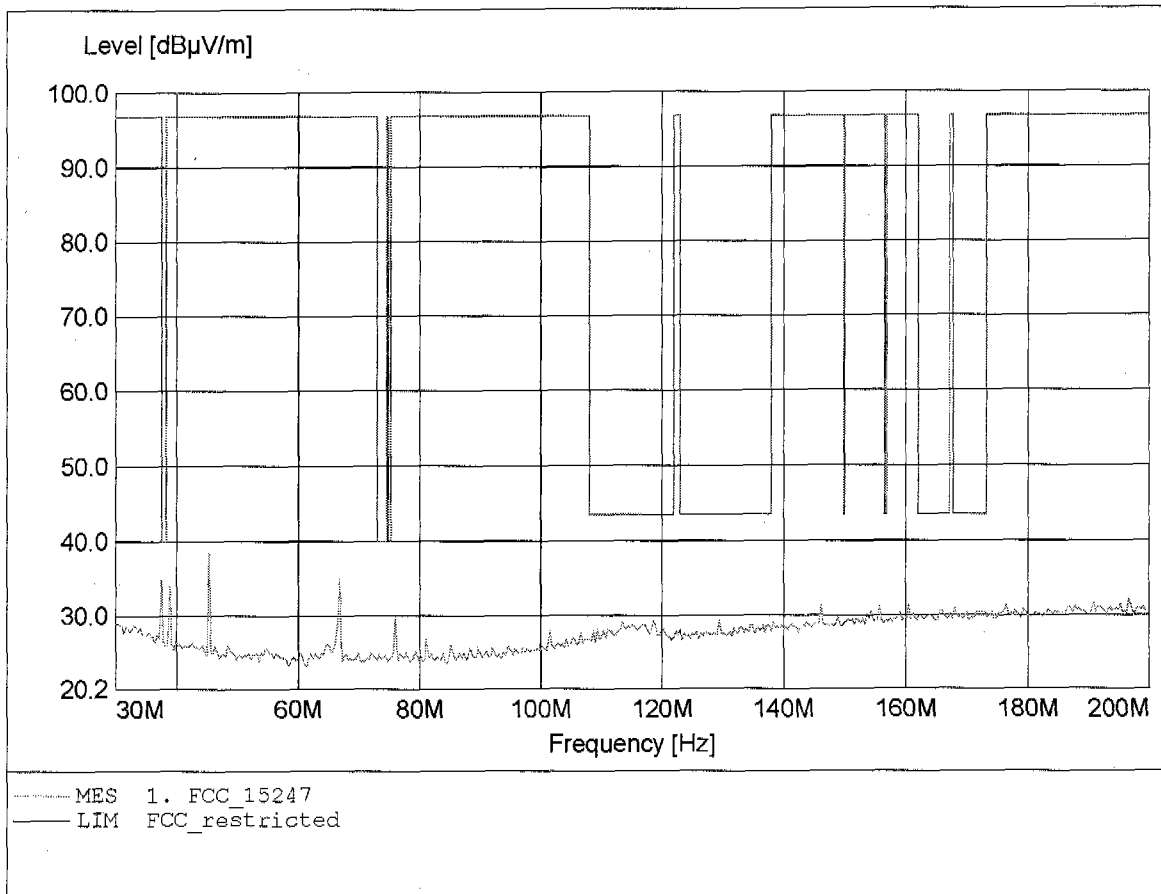


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 197.615MHz, Emax: 31.27dBµV/m, RBW: 100kHz

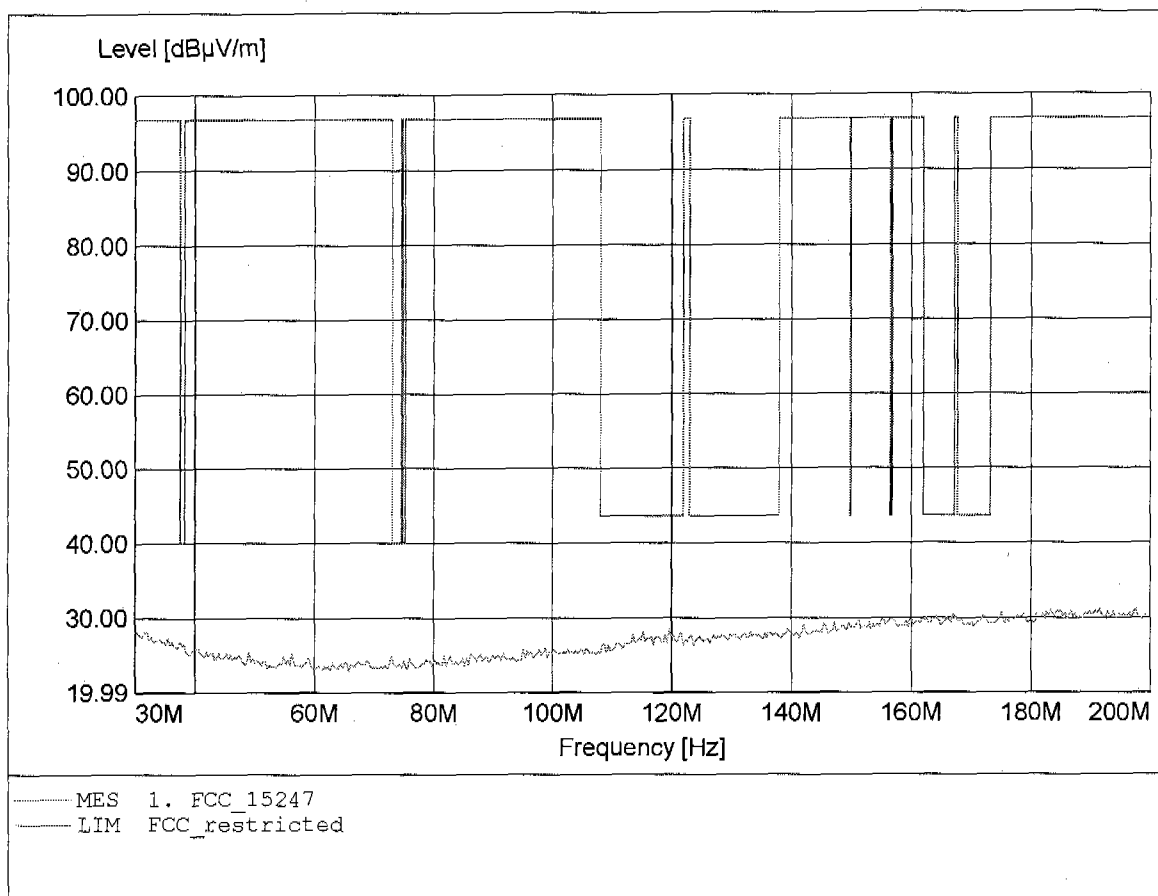


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 560.721MHz, Emax: 39.27dBµV/m, RBW: 100kHz

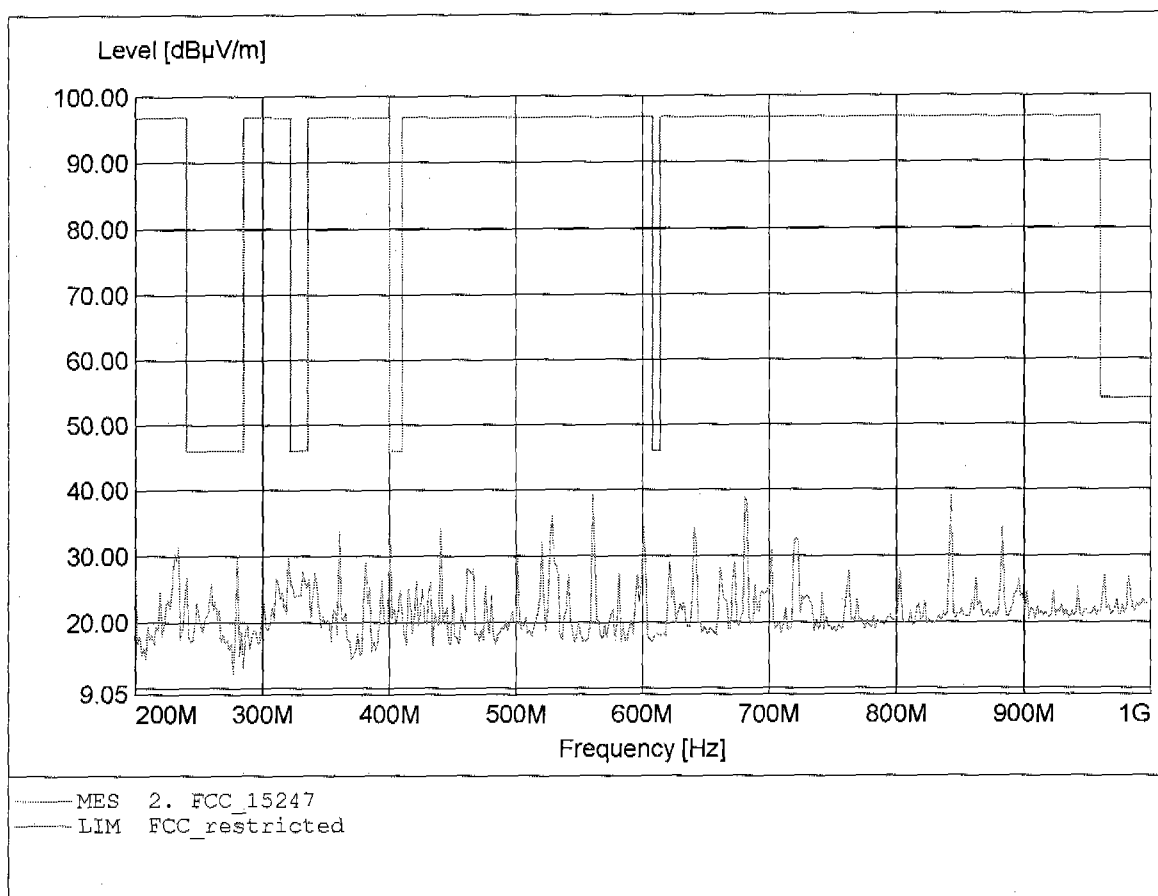


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 842.886MHz, Emax: 38.73dBµV/m, RBW: 100kHz

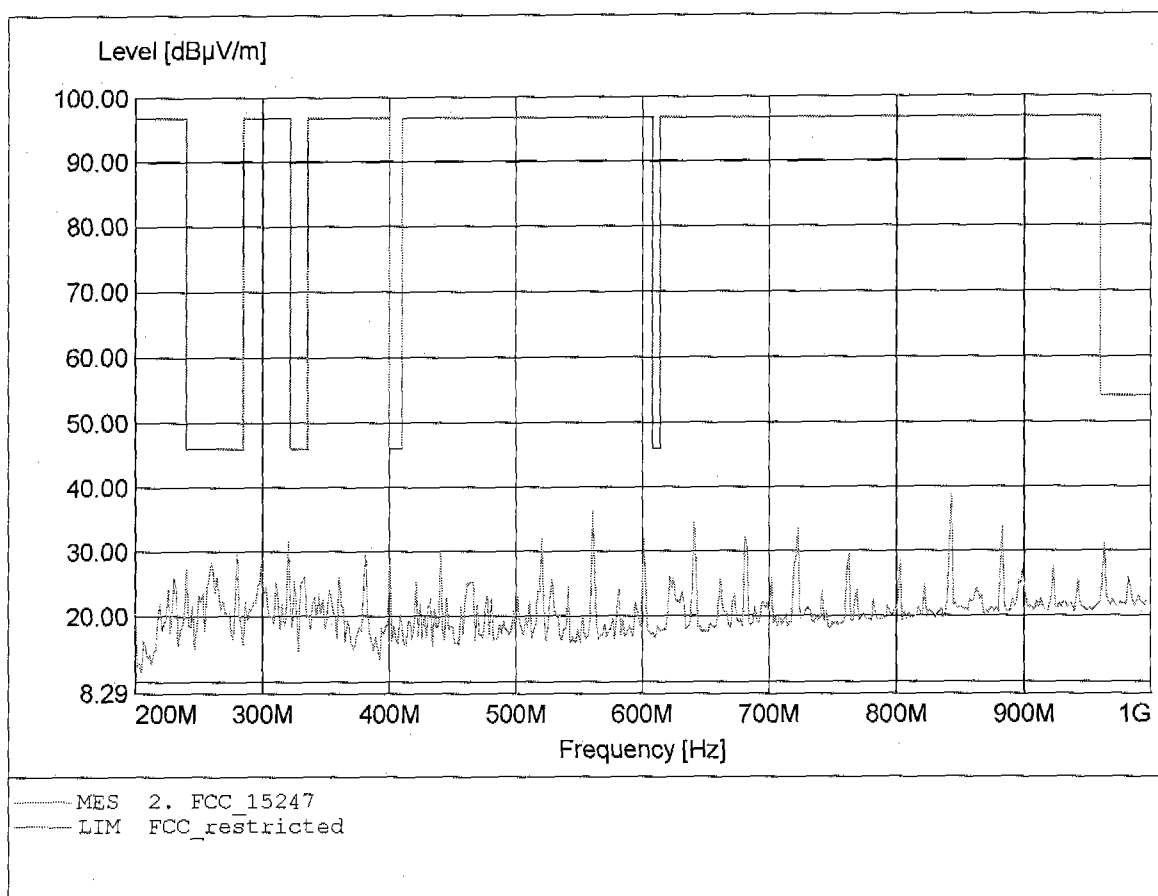


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.394GHz, Emax: 78.94dBµV/m, RBW: 1MHz

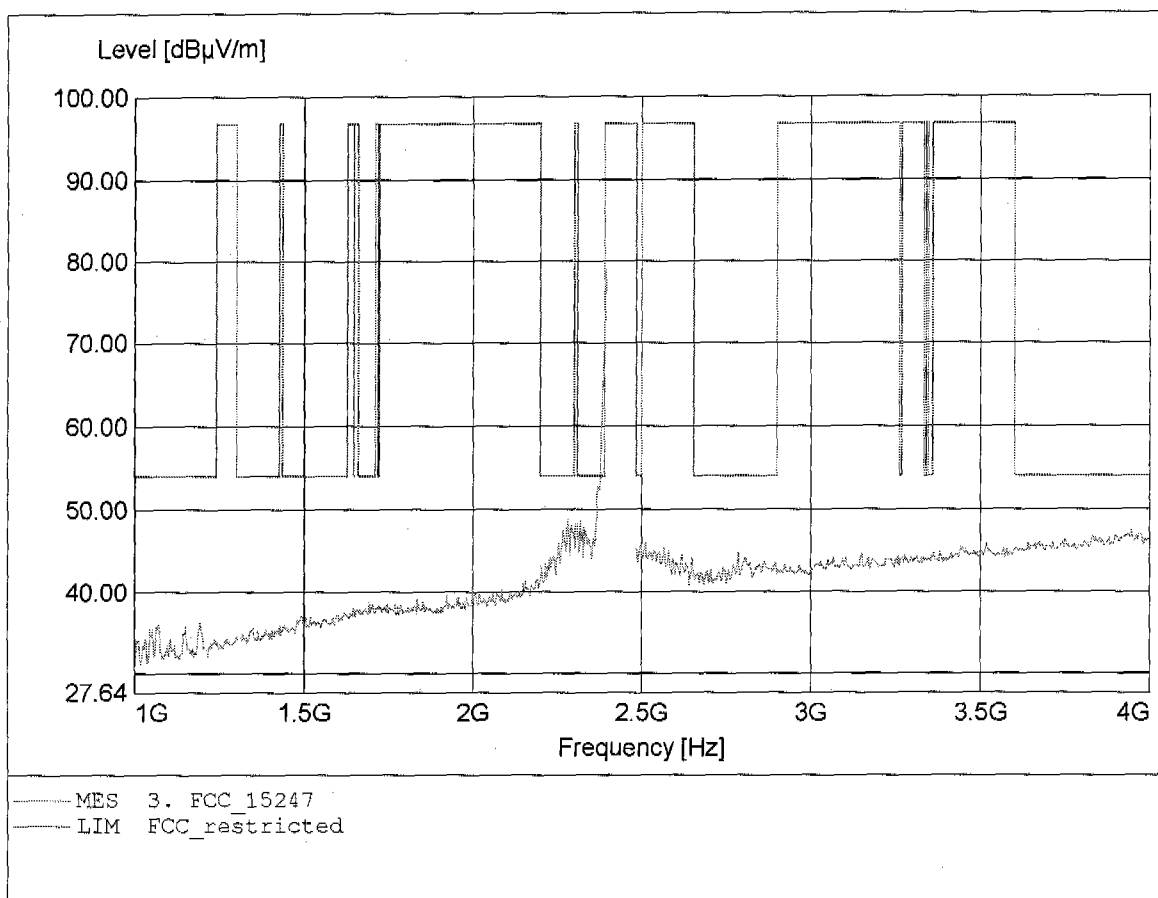


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.394GHz, Emax: 78.94dBµV/m, RBW: 1MHz

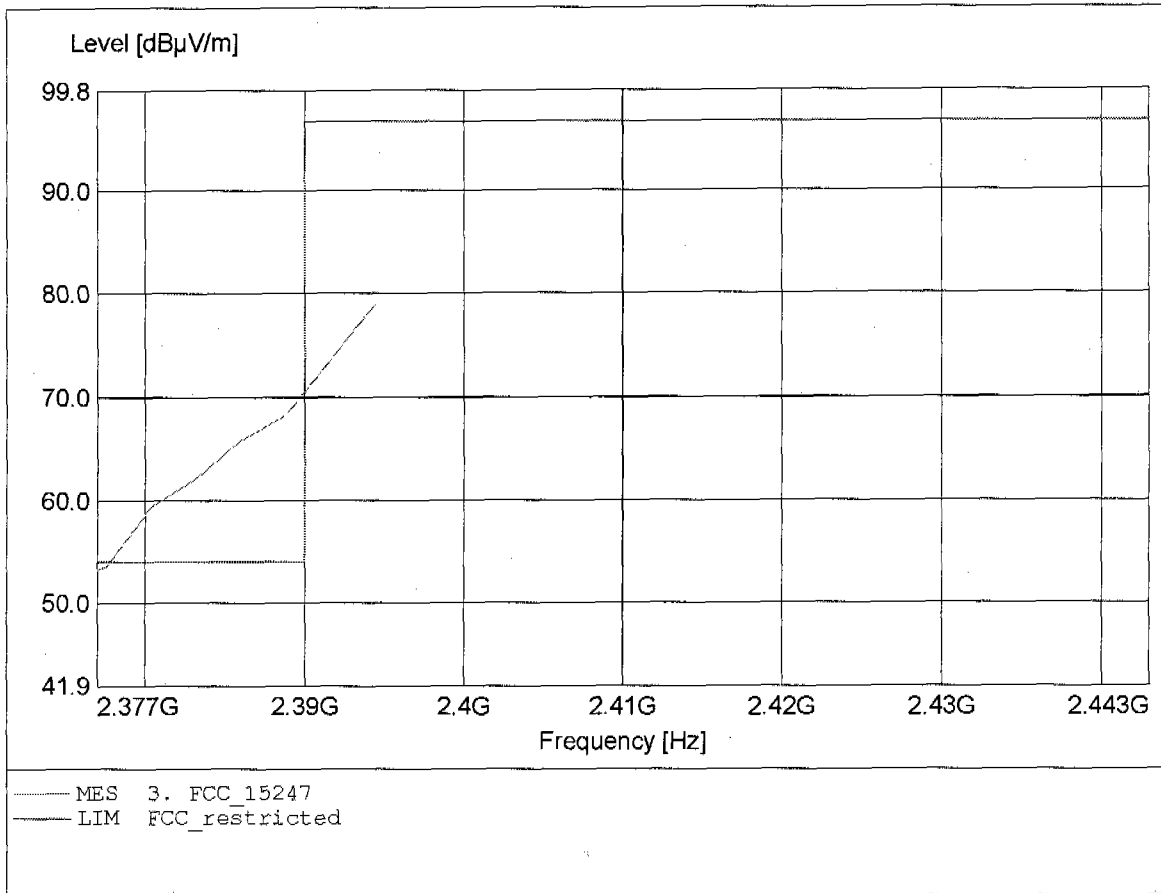


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.394GHz, Emax: 50.38dBµV/m, RBW: 1MHz

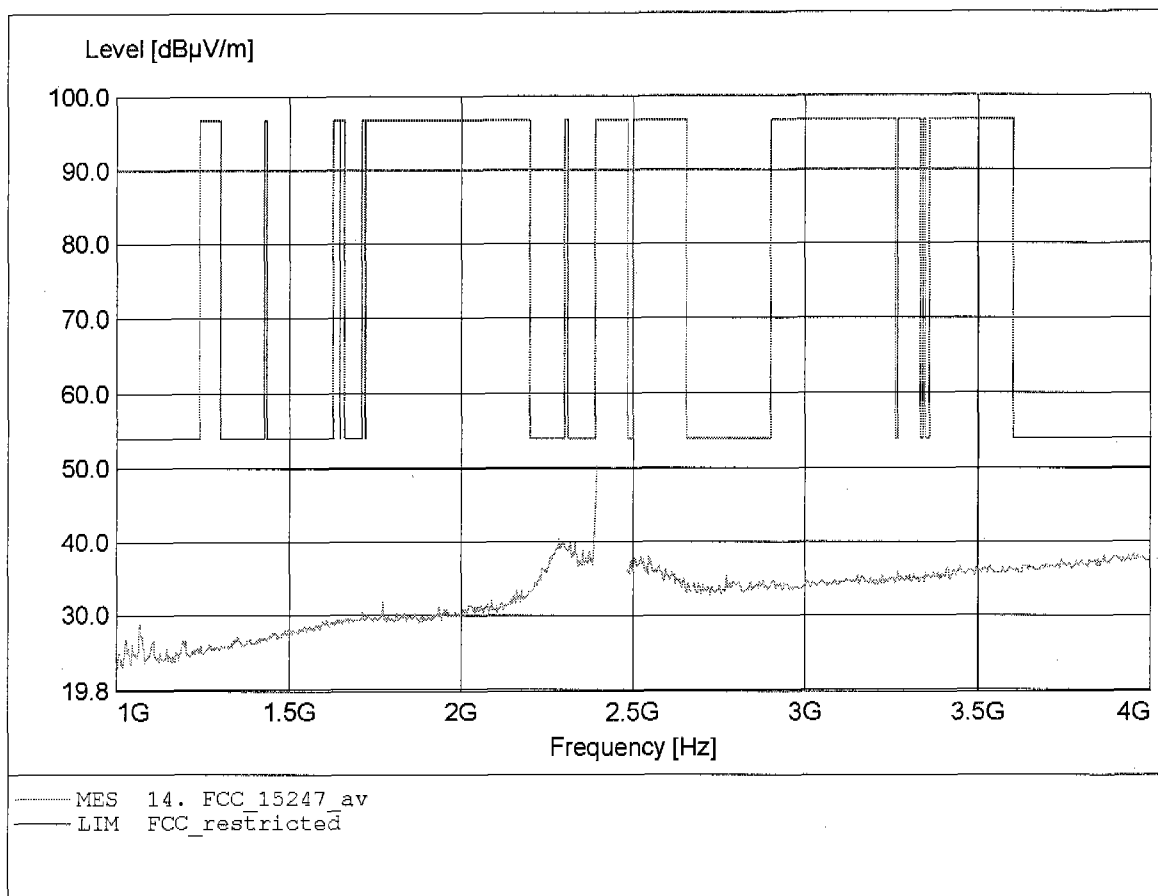


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.394GHz, Emax: 77.80dBµV/m, RBW: 1MHz

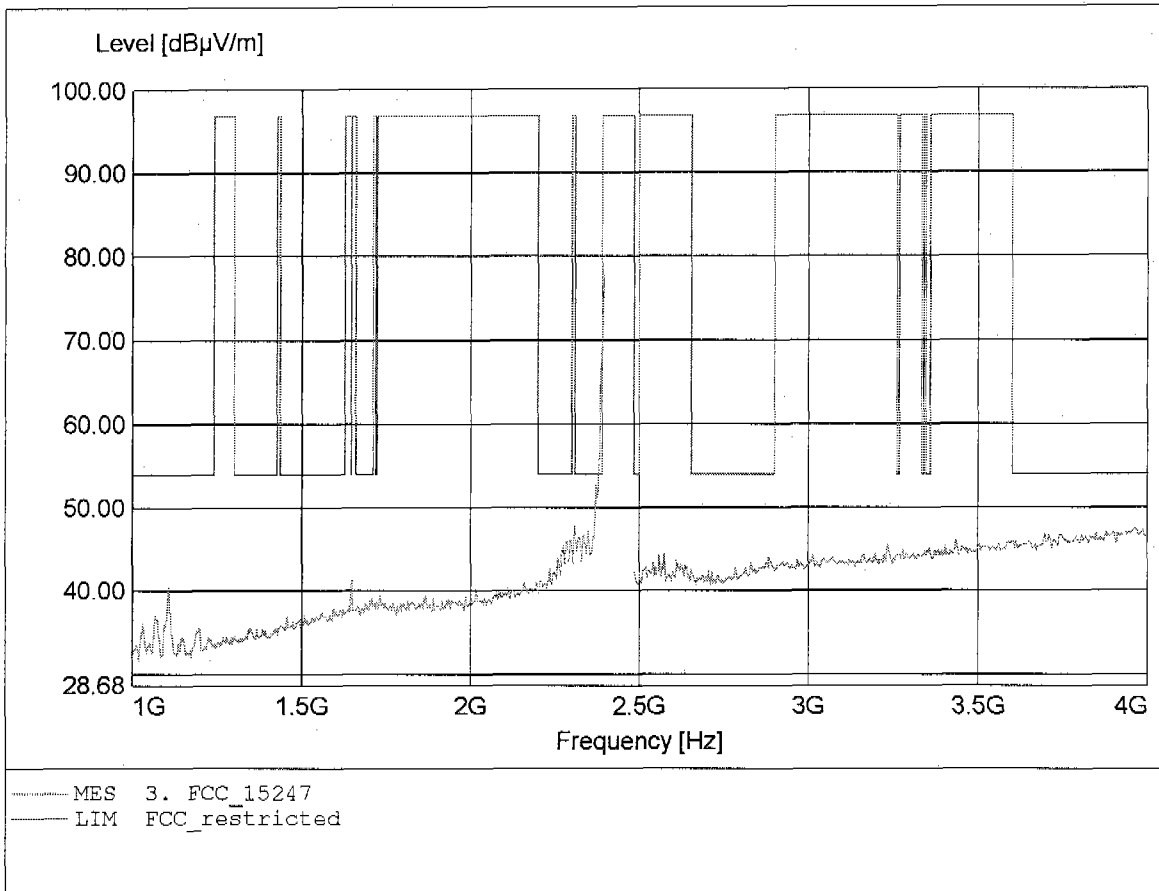


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
 EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 2
 Model: GN Ellipse 2.4
 Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
 Test Site / Operator: ETS / Mr. Handrik
 Test Specification: according to §15.247, peak detector
 Comment 1: Dist.: 3m, Ant.: HL025, amplif.
 Comment 2: Freq: 2.394GHz, Emax: 75.86dBµV/m, RBW: 1MHz

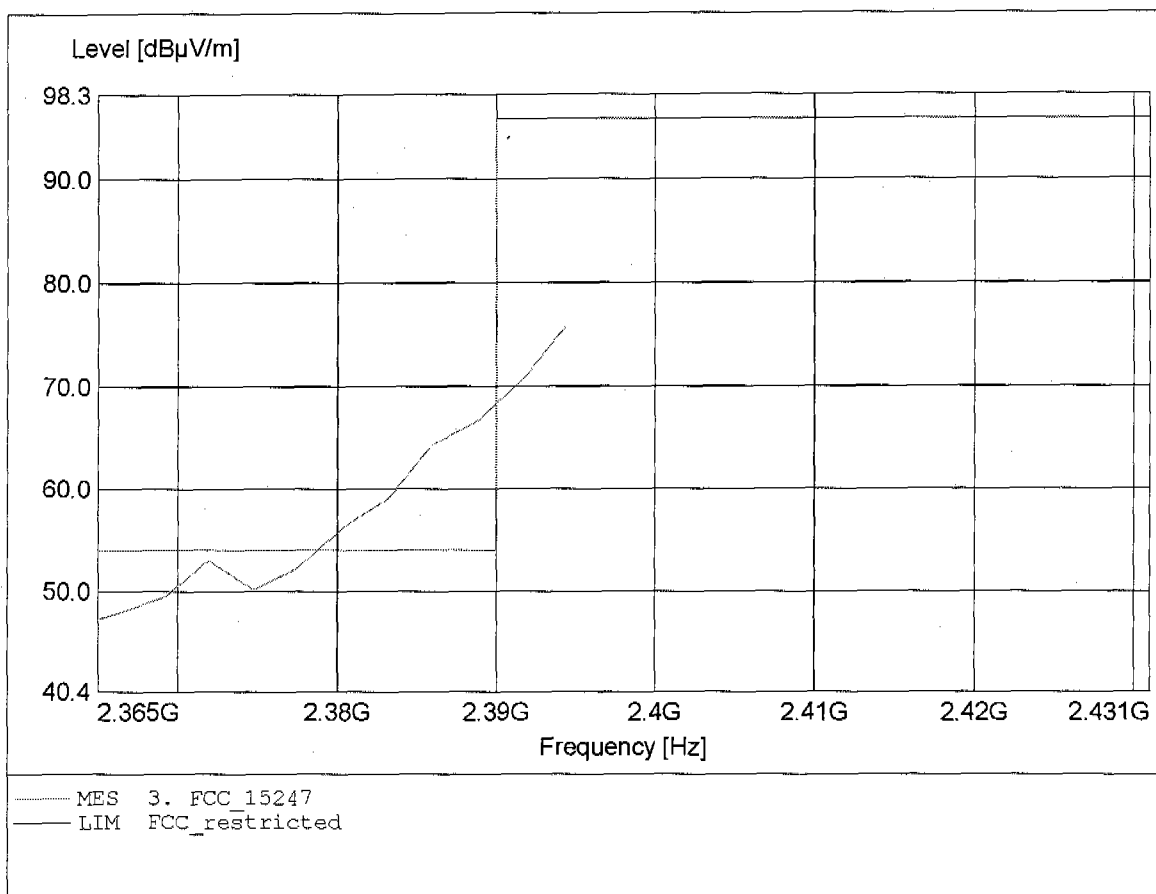


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.389GHz, Emax: 43.84dBµV/m, RBW: 1MHz

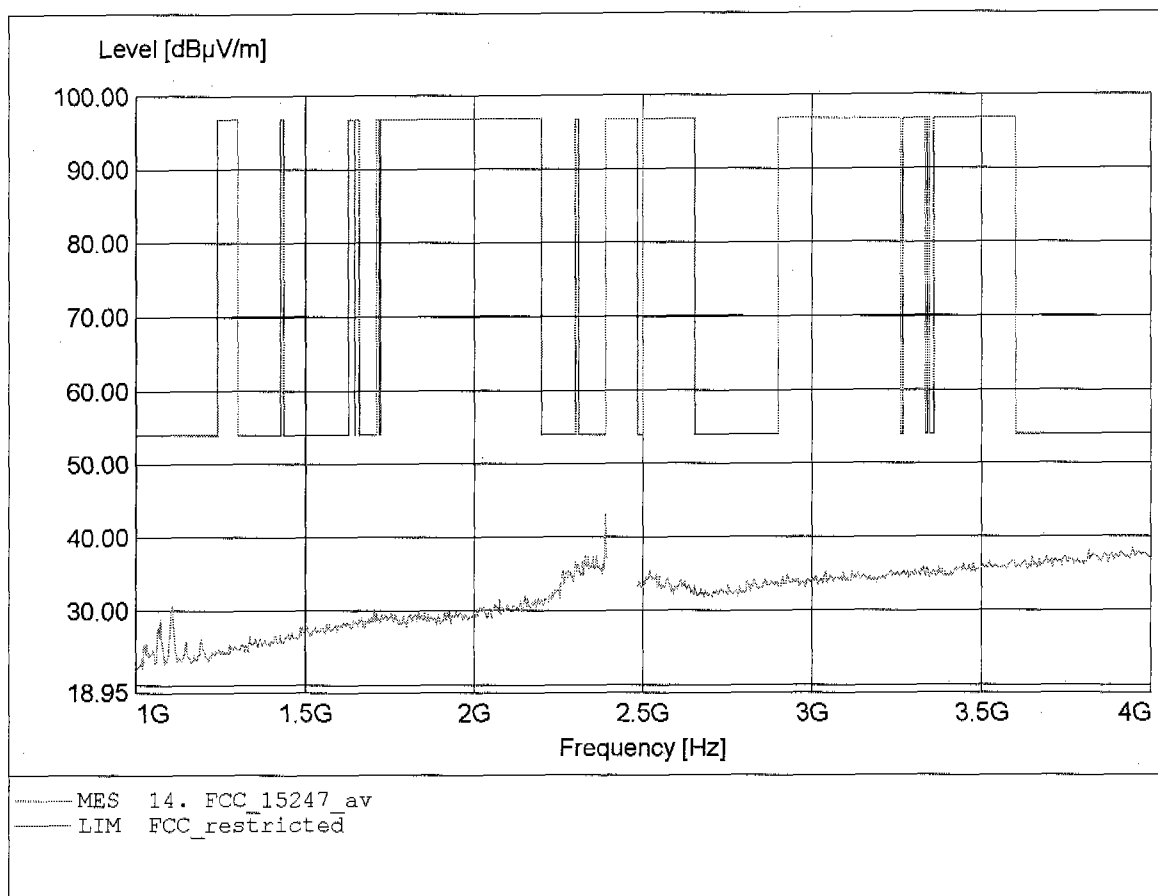


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 55.46dBµV/m, RBW: 1MHz

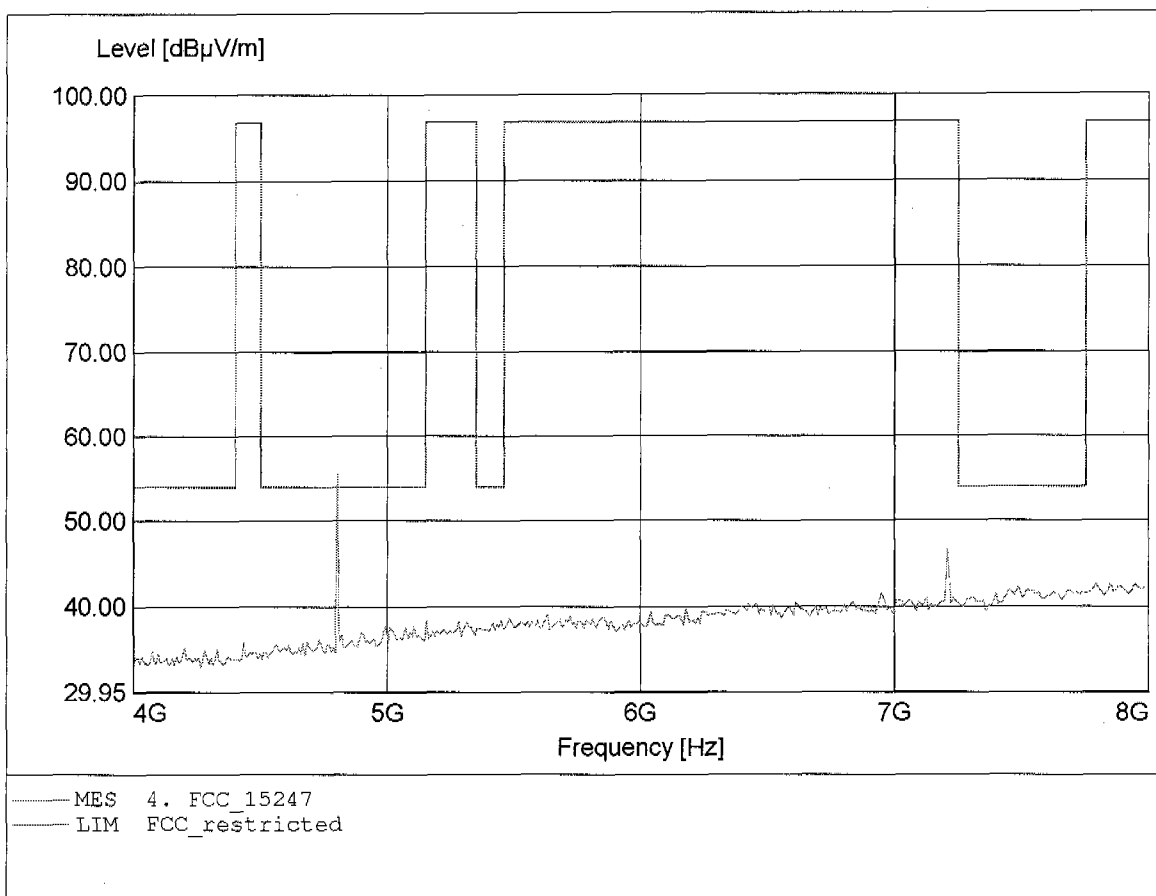


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 32.88dBµV/m, RBW: 1MHz

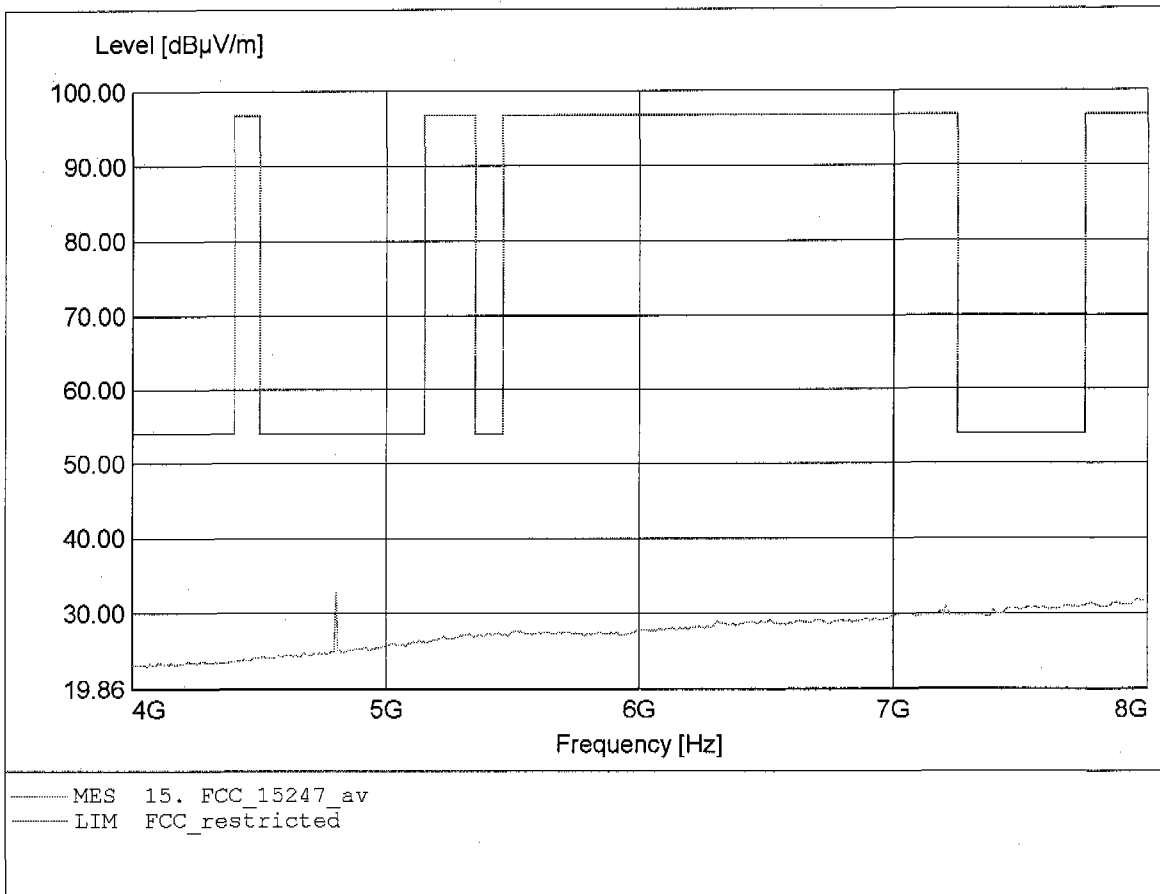


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 54.45dBµV/m, RBW: 1MHz

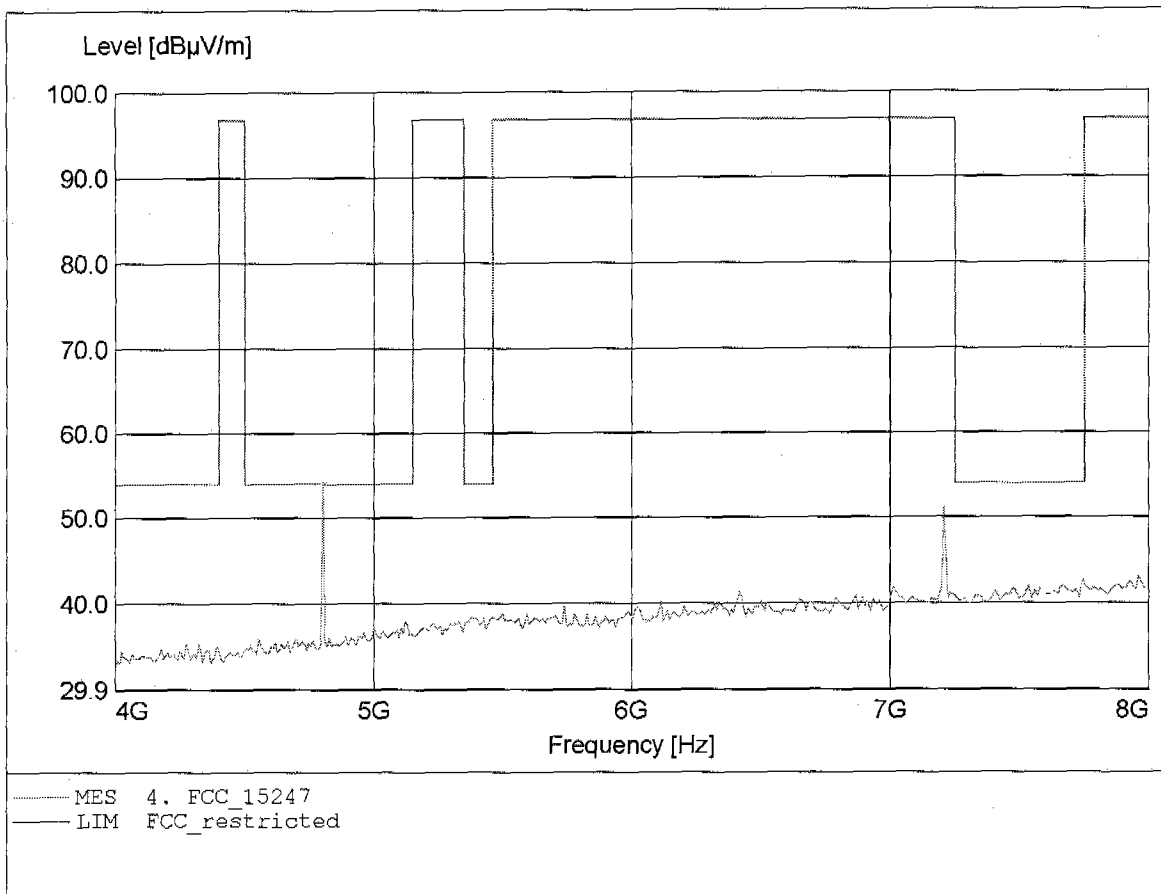


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.206GHz, Emax: 33.63dBµV/m, RBW: 1MHz

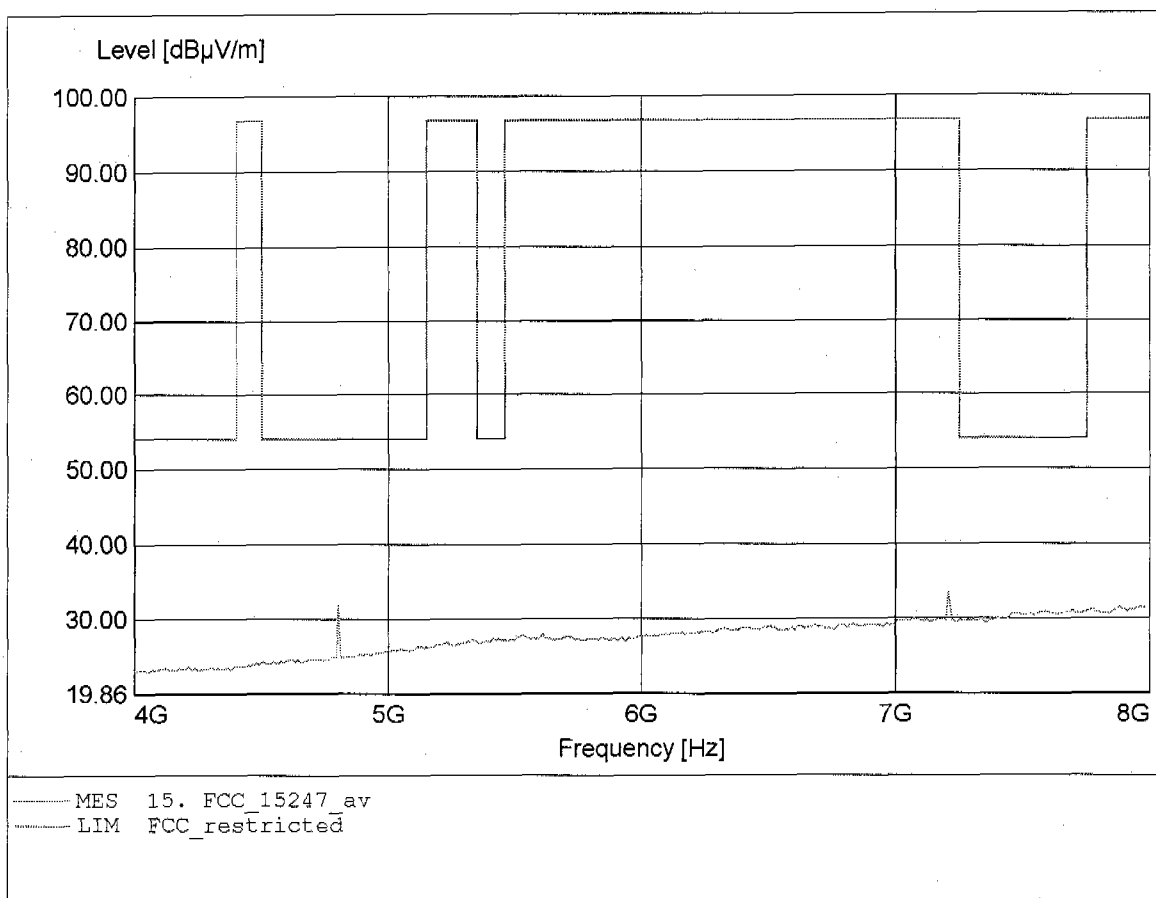


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.603GHz, Emax: 49.92dBµV/m, RBW: 1MHz

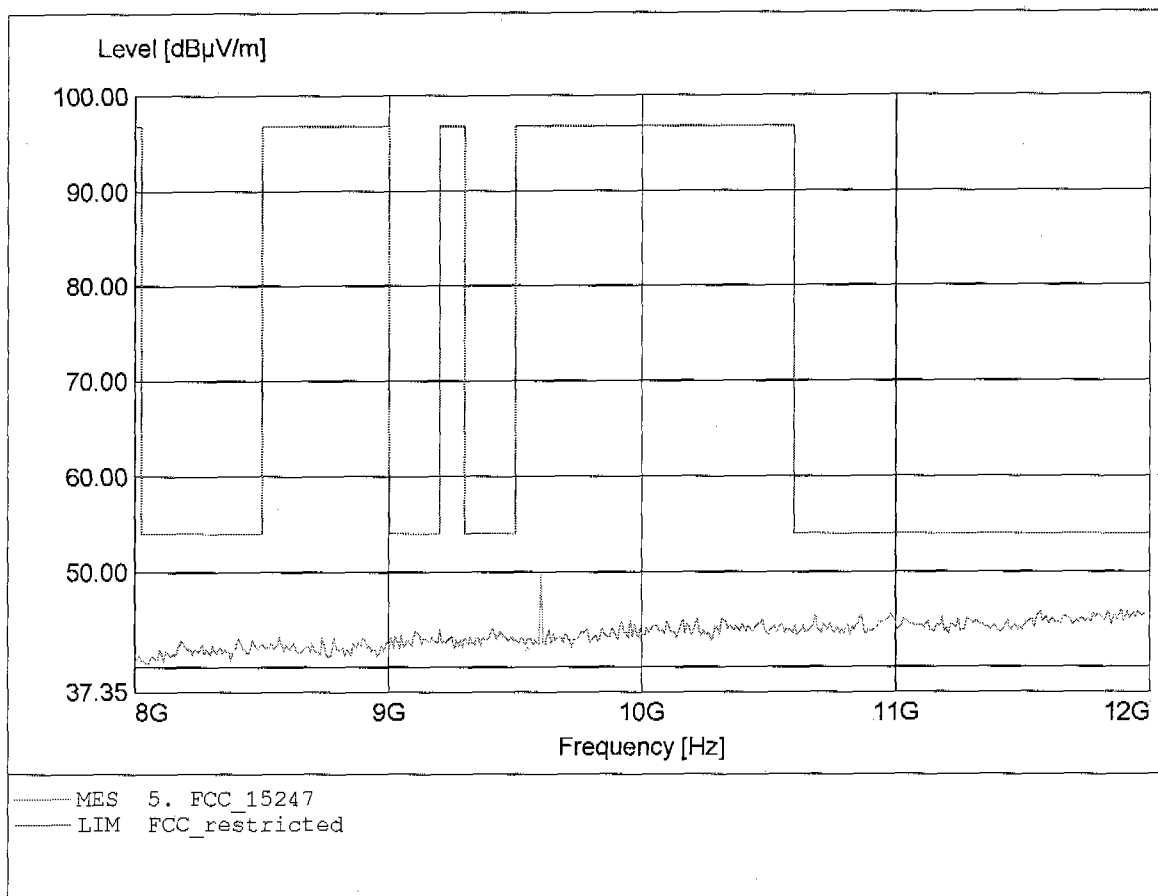


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.603GHz, Emax: 51.53dBµV/m, RBW: 1MHz

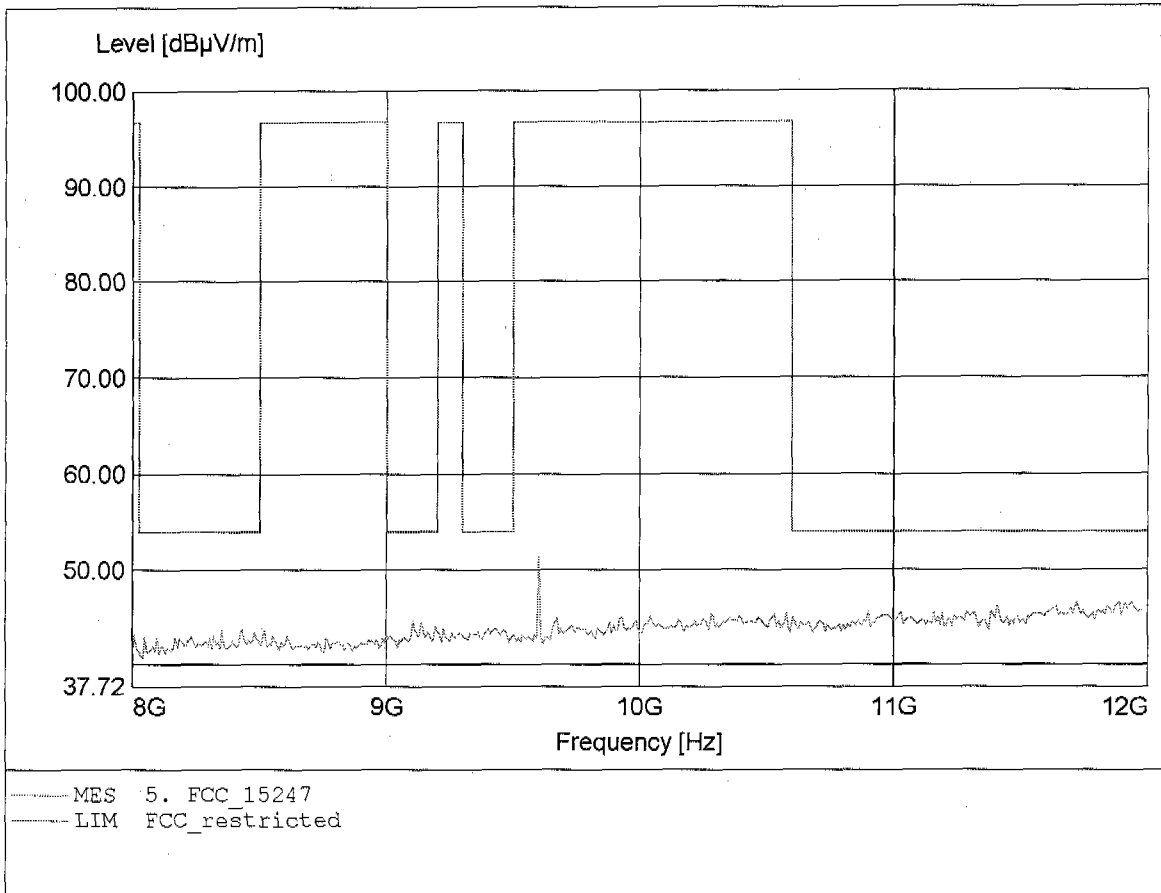


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 14.405GHz, Emax: 51.75dBµV/m, RBW: 1MHz

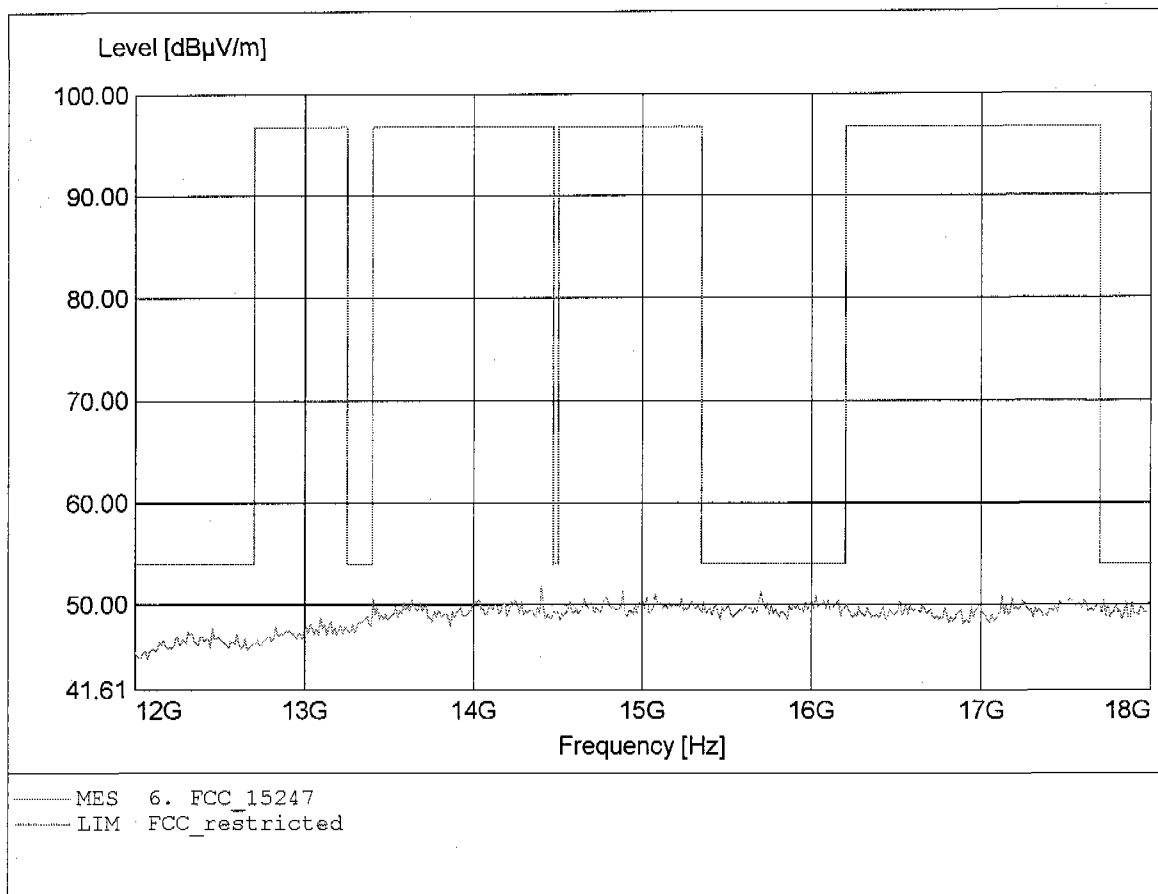


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 14.814GHz, Emax: 51.13dBµV/m, RBW: 1MHz

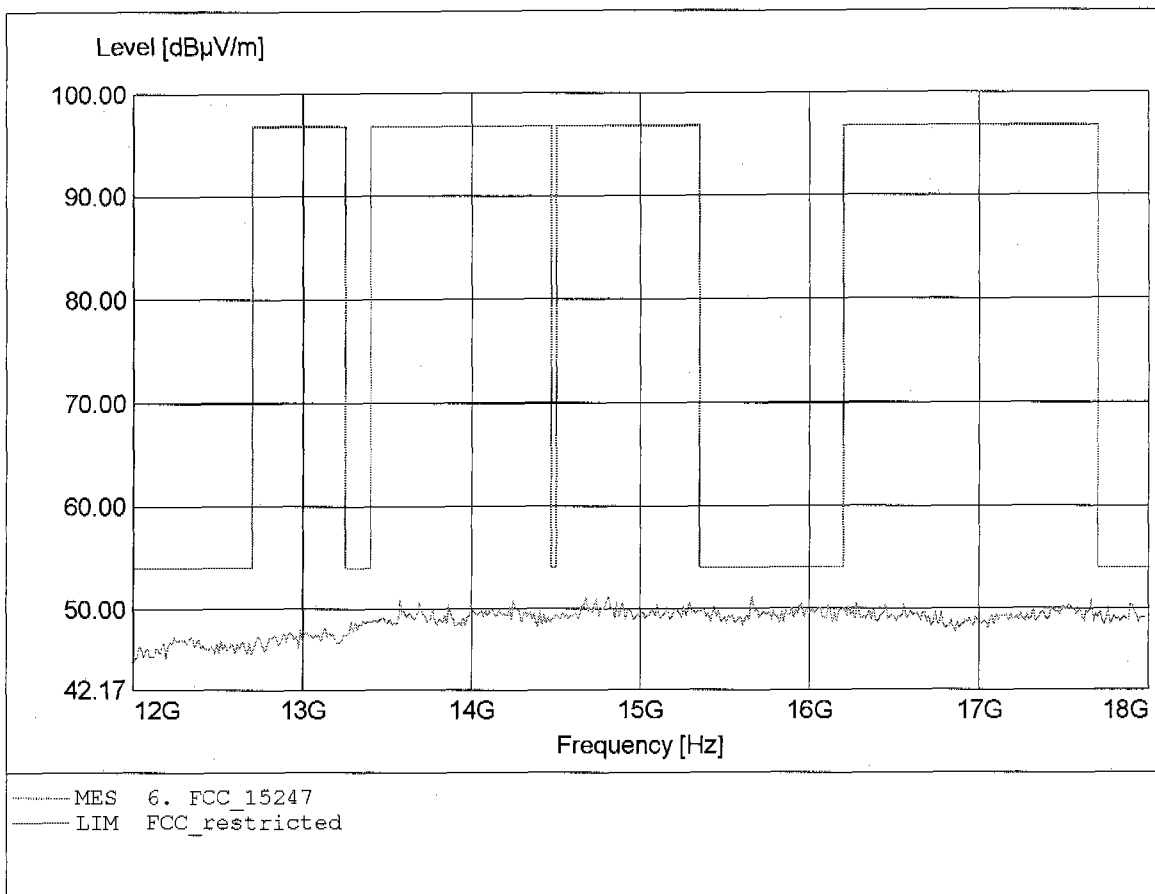


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.227GHz, Emax: 48.94dBµV/m, RBW: 1MHz

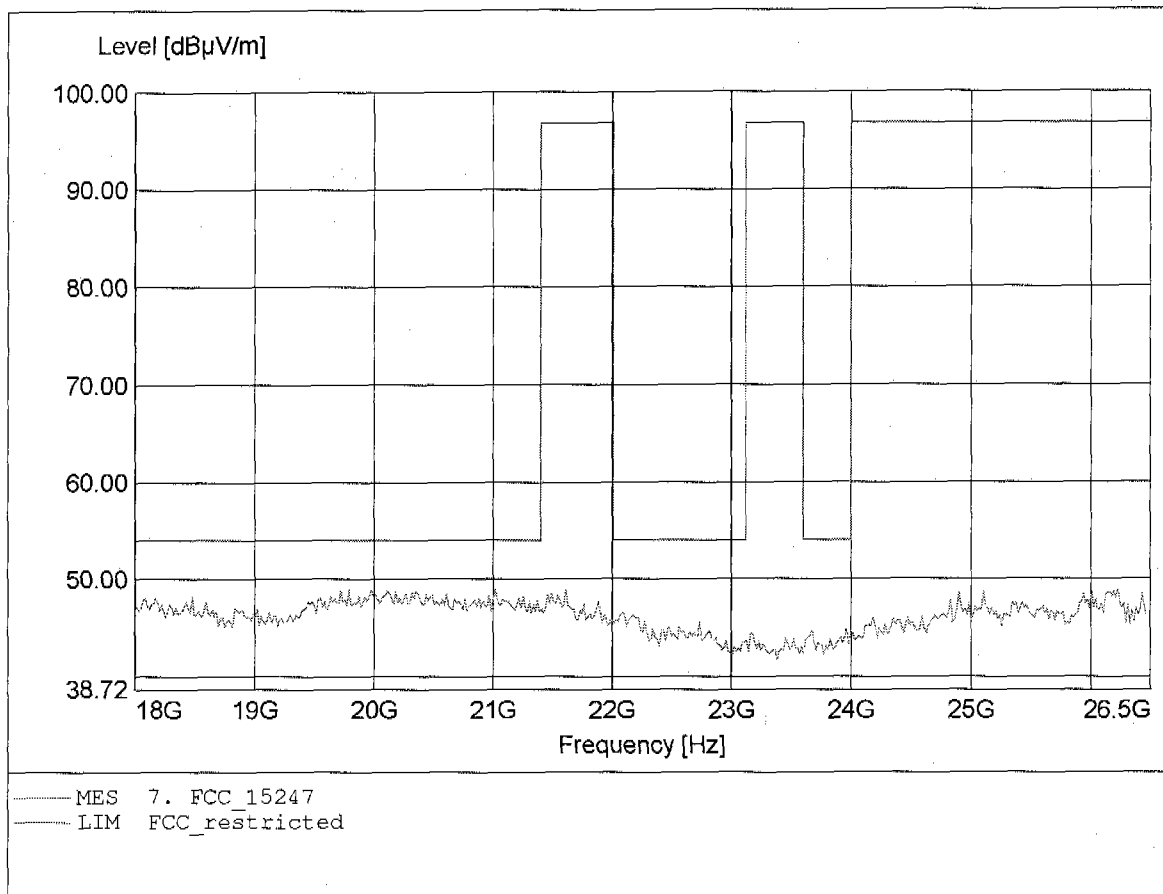


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 0 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.210GHz, Emax: 49.80dBµV/m, RBW: 1MHz

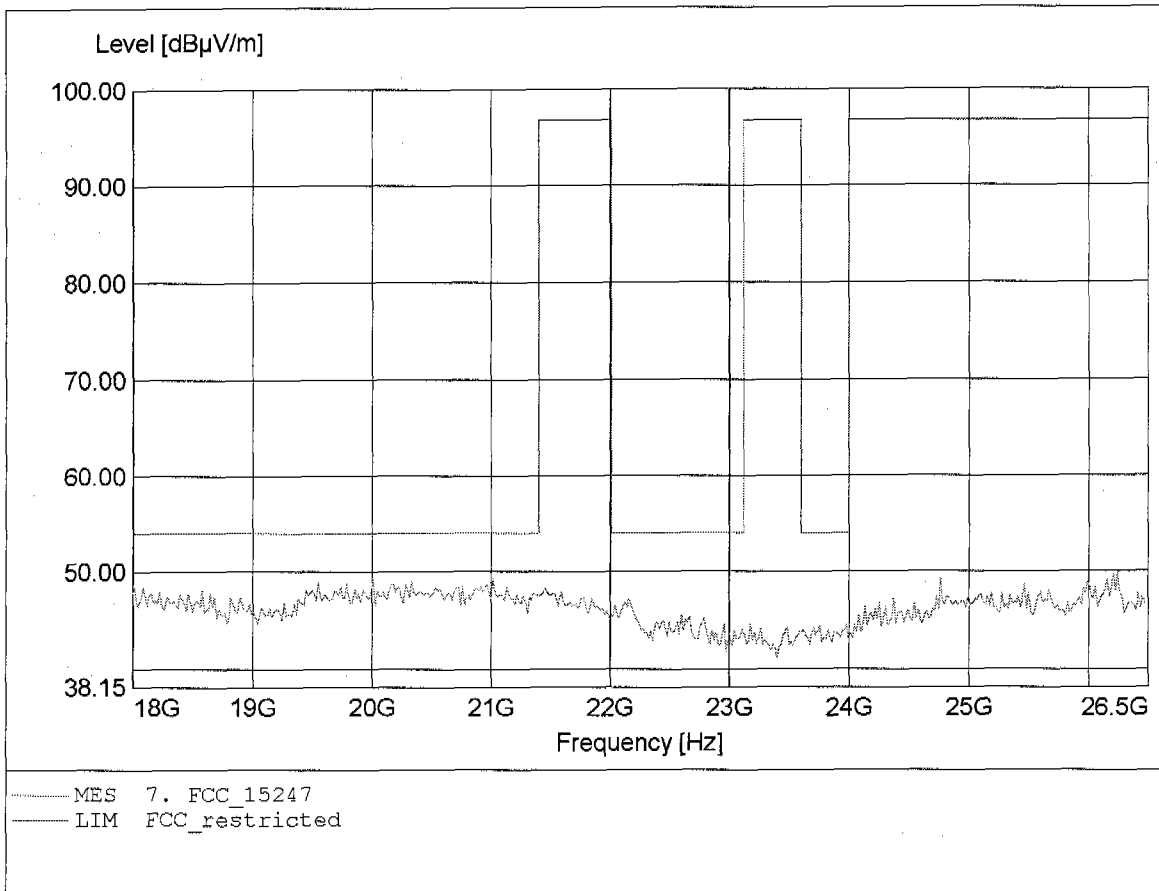


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 47 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 33.407MHz, Emax: 34.12dBµV/m, RBW: 100kHz

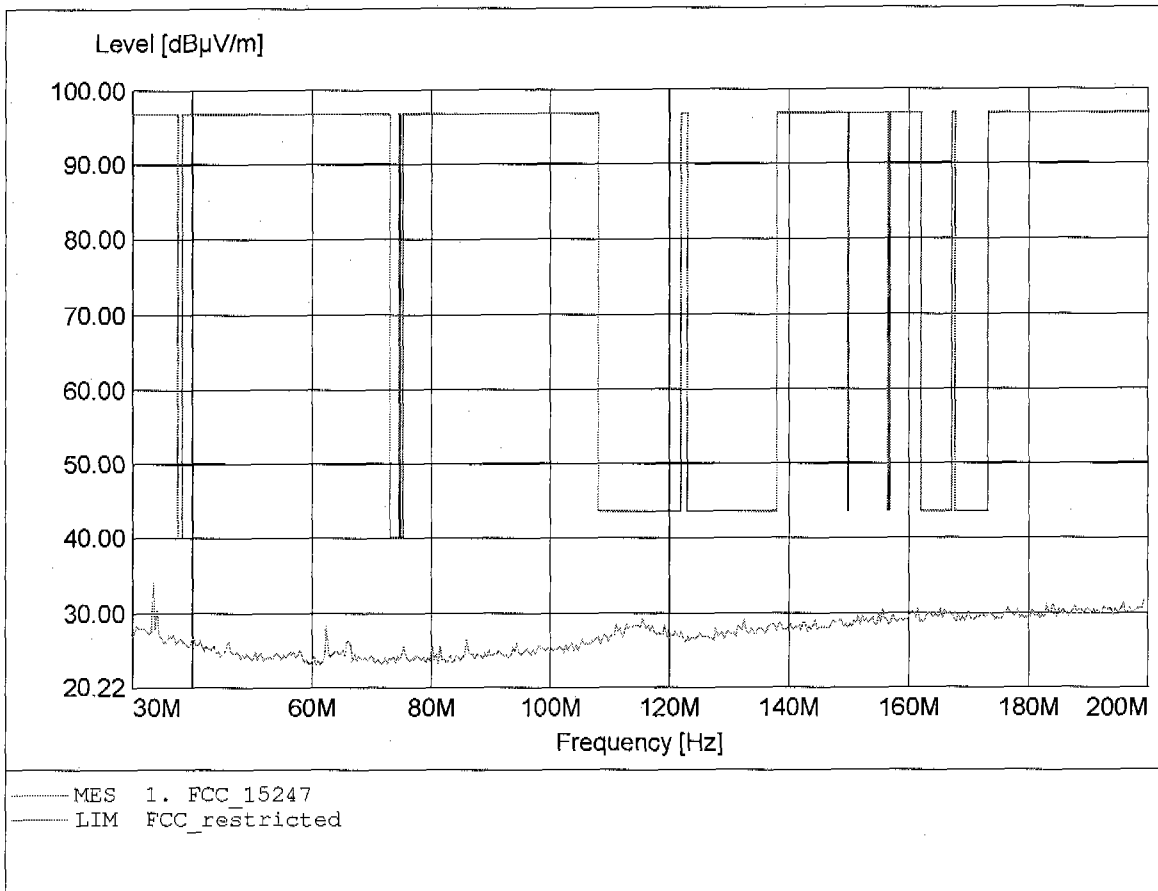


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 47 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 187.395MHz, Emax: 31.63dBµV/m, RBW: 100kHz

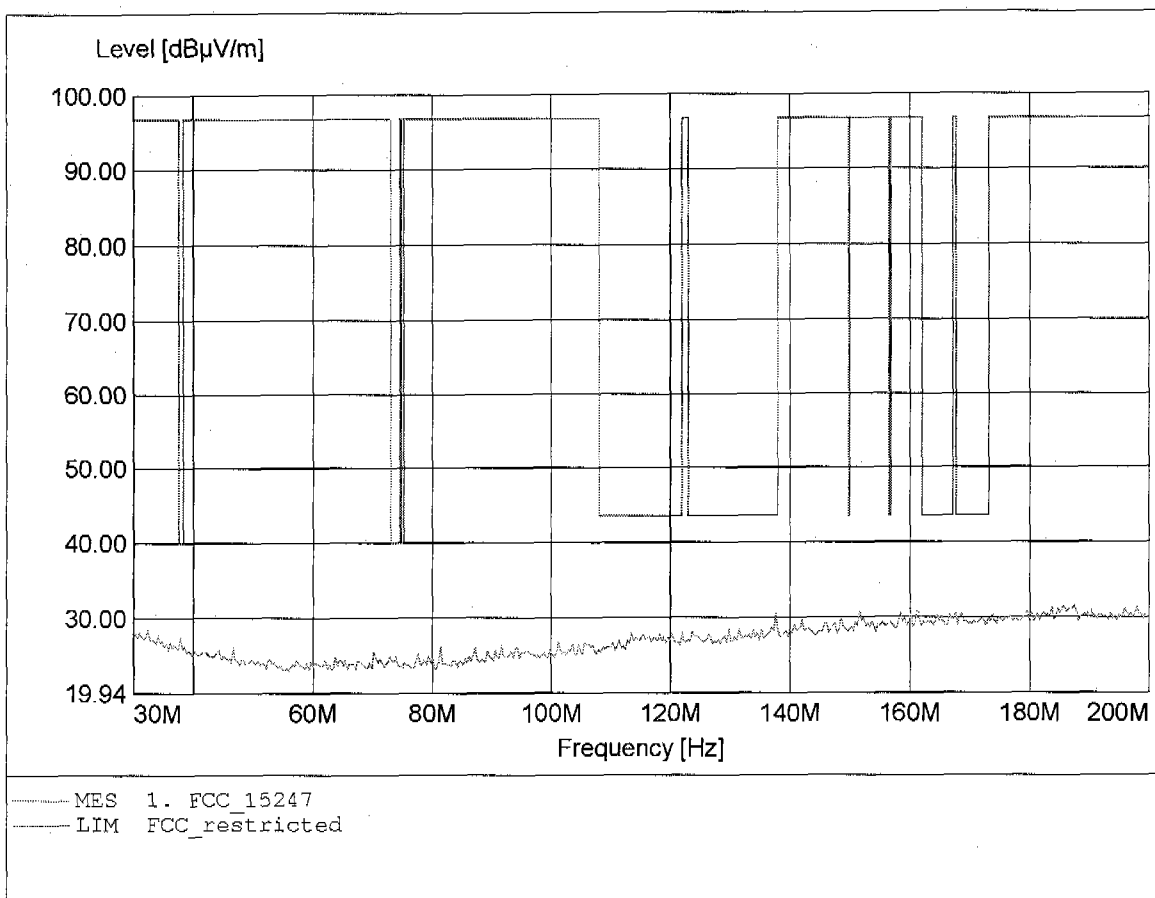


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 47 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 842.886MHz, Emax: 39.69dBµV/m, RBW: 100kHz

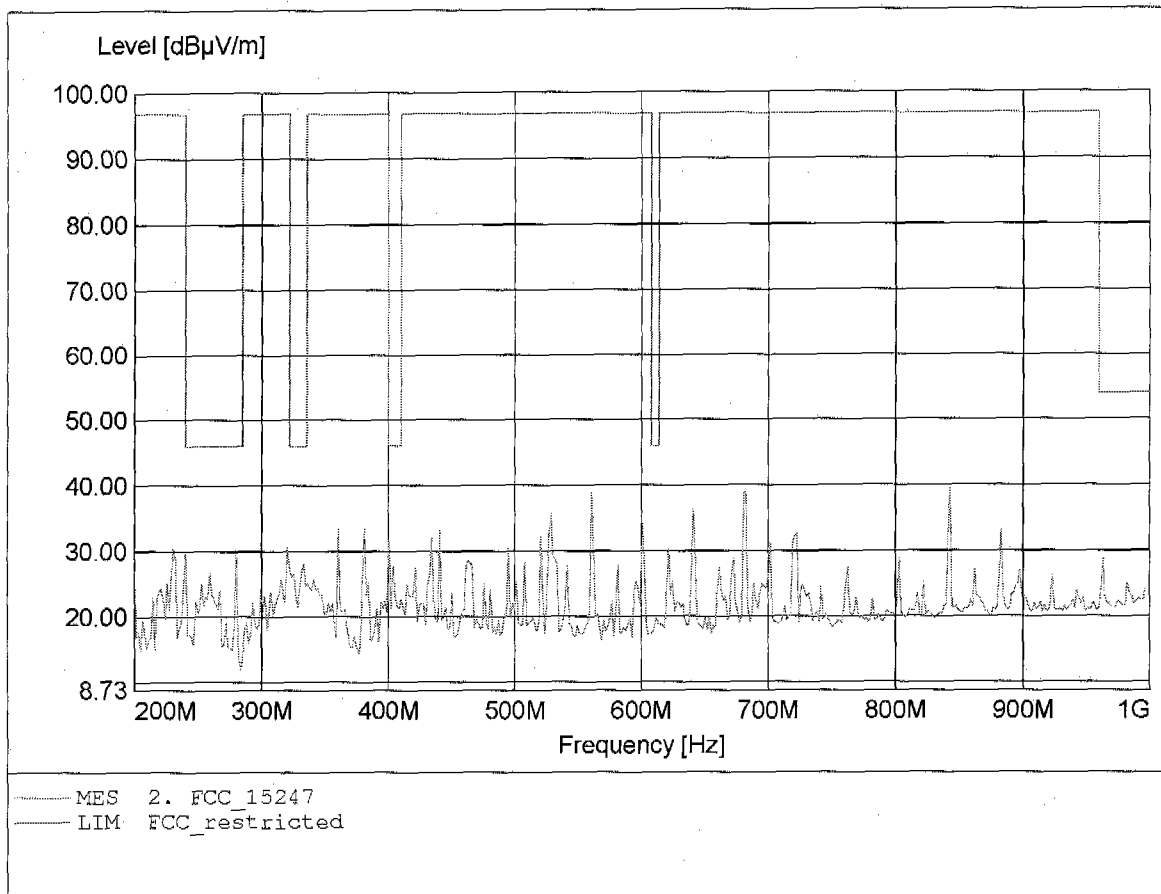


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 47 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 842.886MHz, Emax: 38.74dBµV/m, RBW: 100kHz

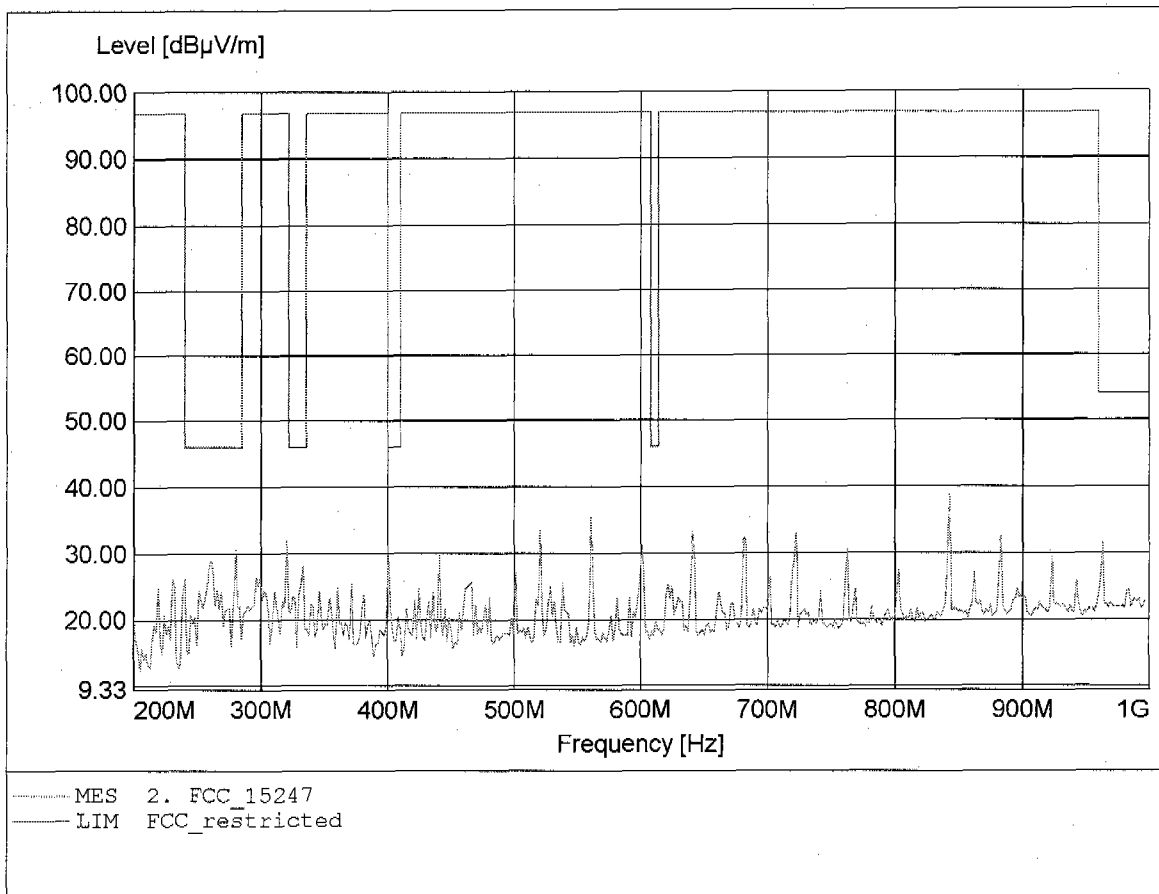


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 47 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.305GHz, Emax: 49.97dBµV/m, RBW: 1MHz

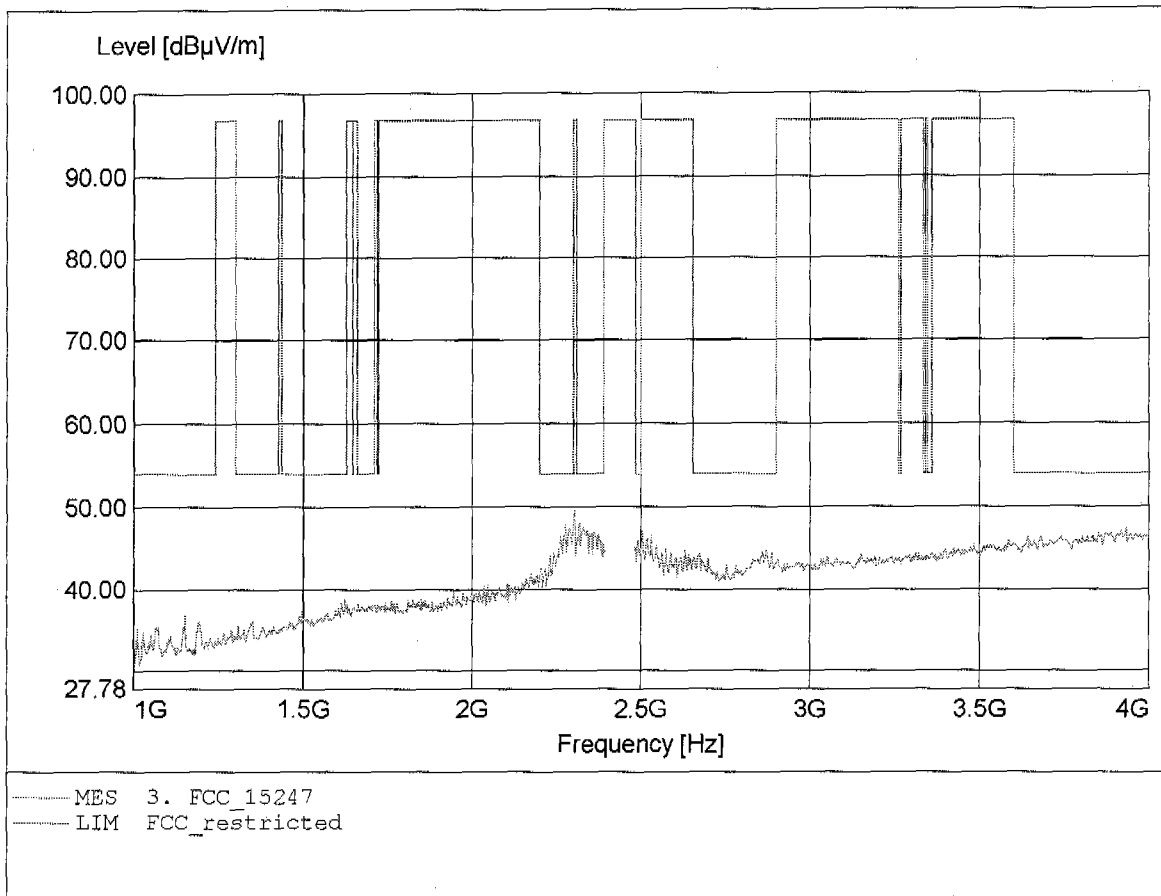


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 47 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 3.979GHz, Emax: 47.47dBµV/m, RBW: 1MHz

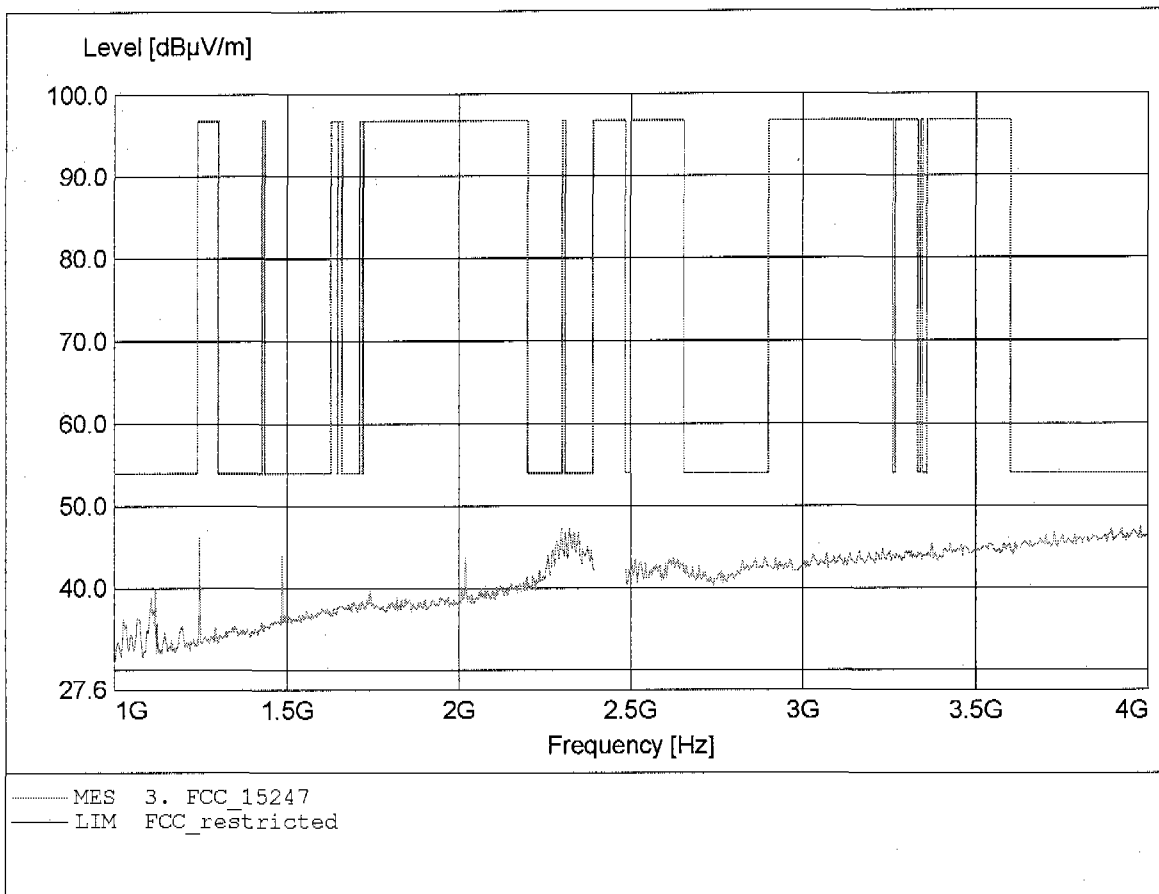


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 47 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 51.56dBµV/m, RBW: 1MHz

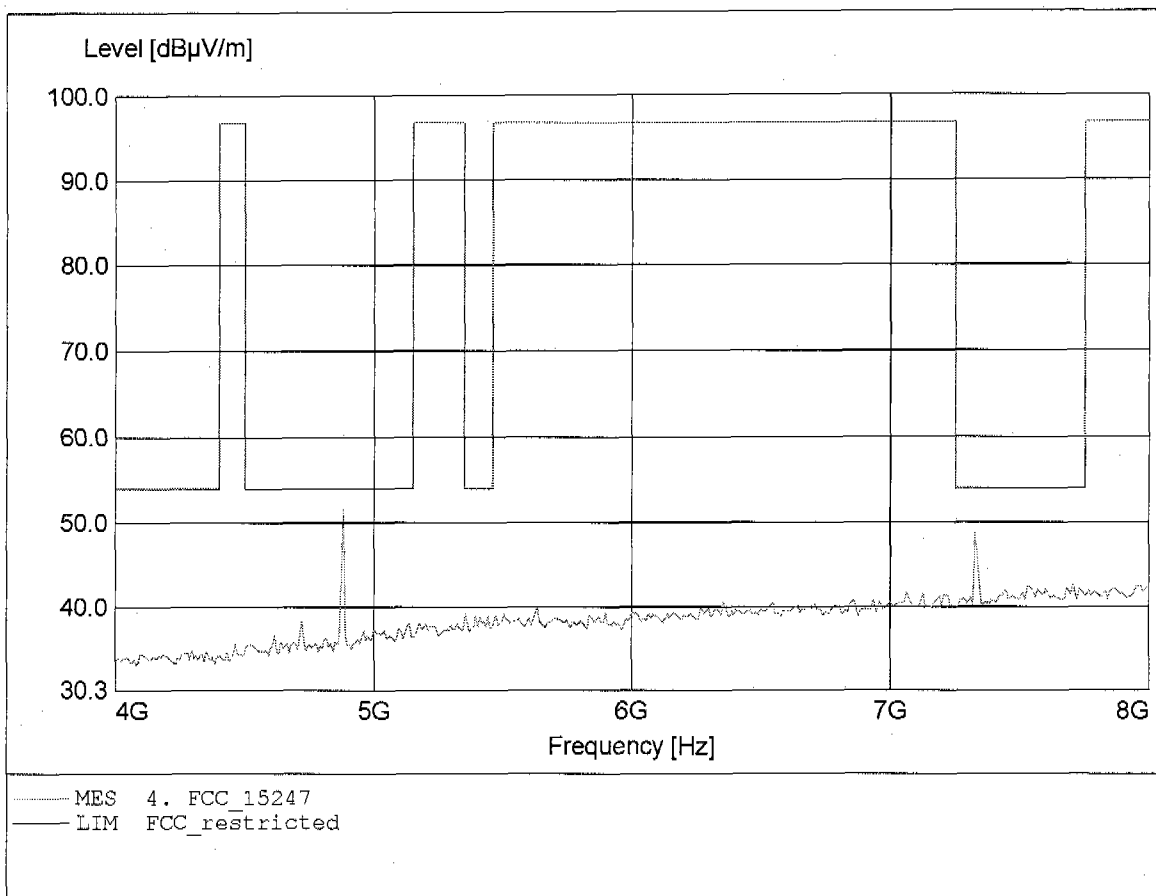


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 47 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 57.23dBµV/m, RBW: 1MHz

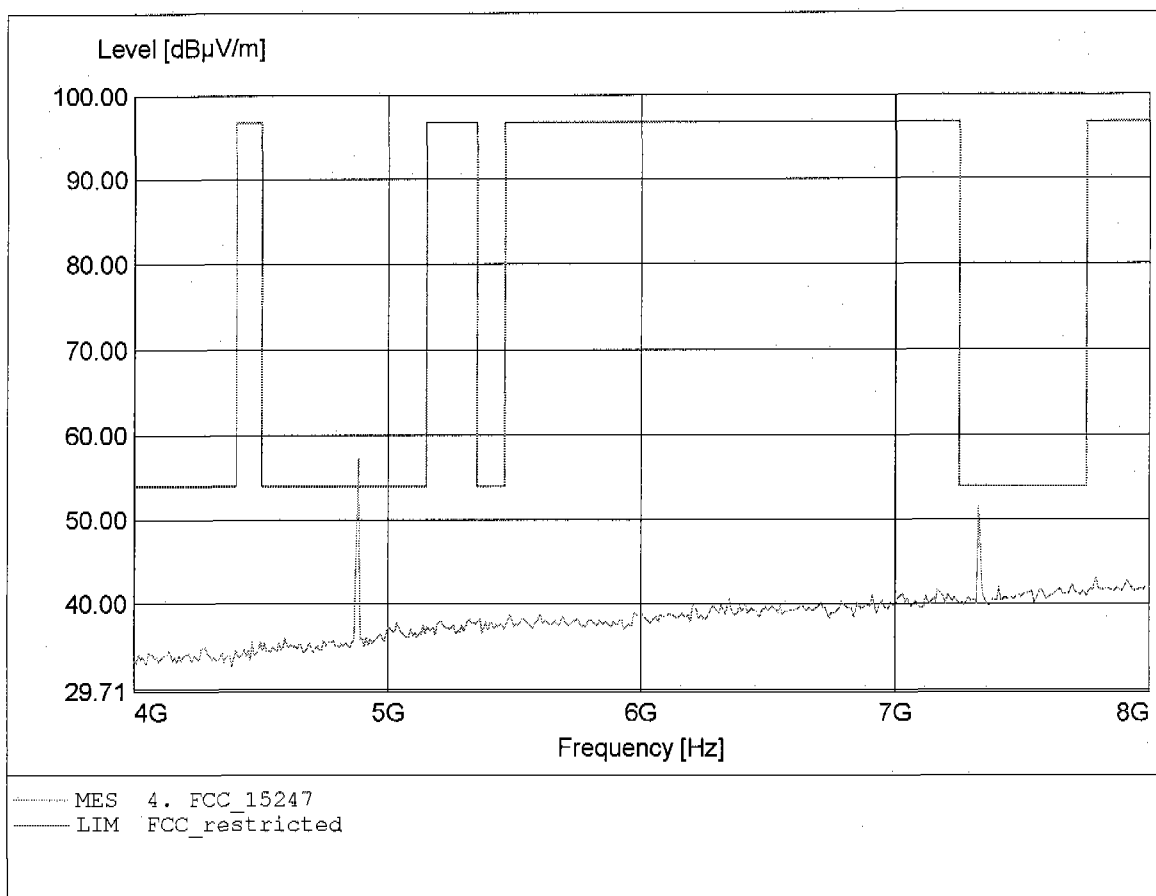


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 47 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 37.75dBµV/m, RBW: 1MHz

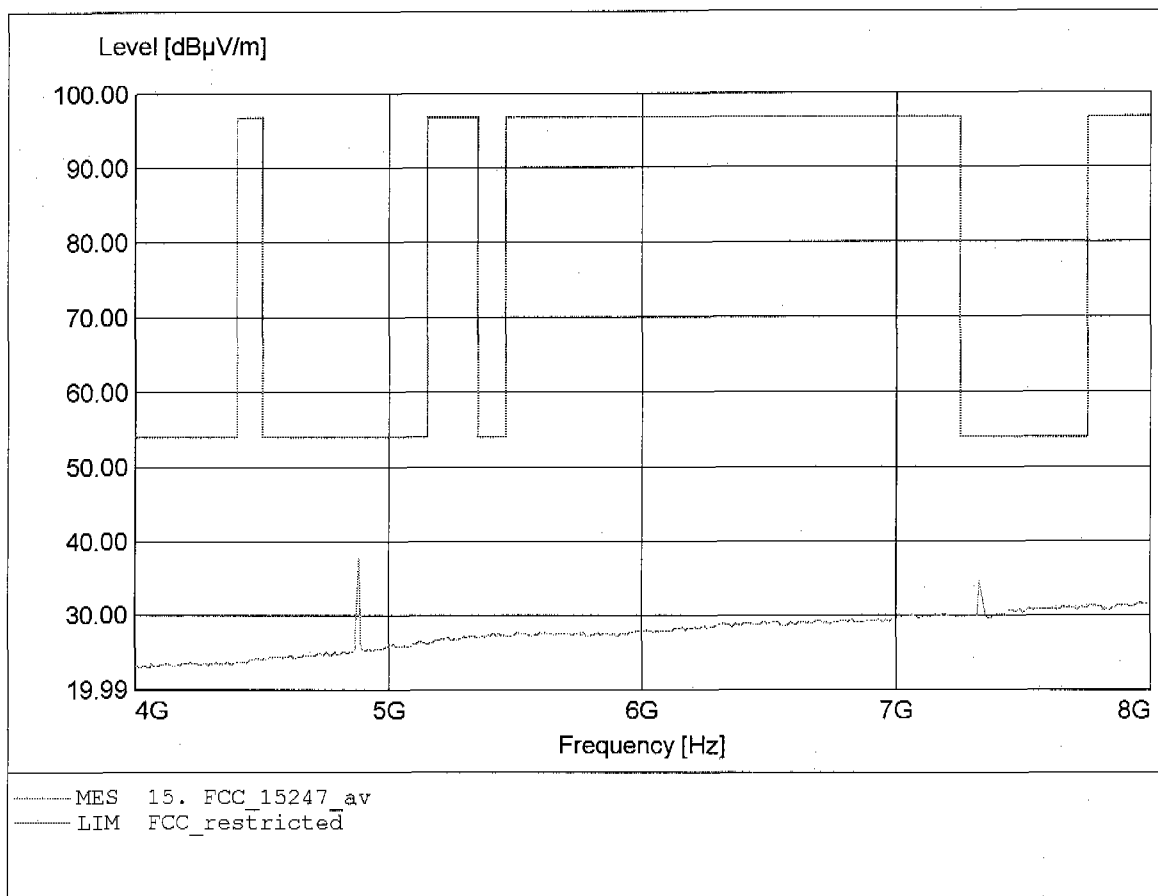


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 47 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.764GHz, Emax: 49.72dBµV/m, RBW: 1MHz

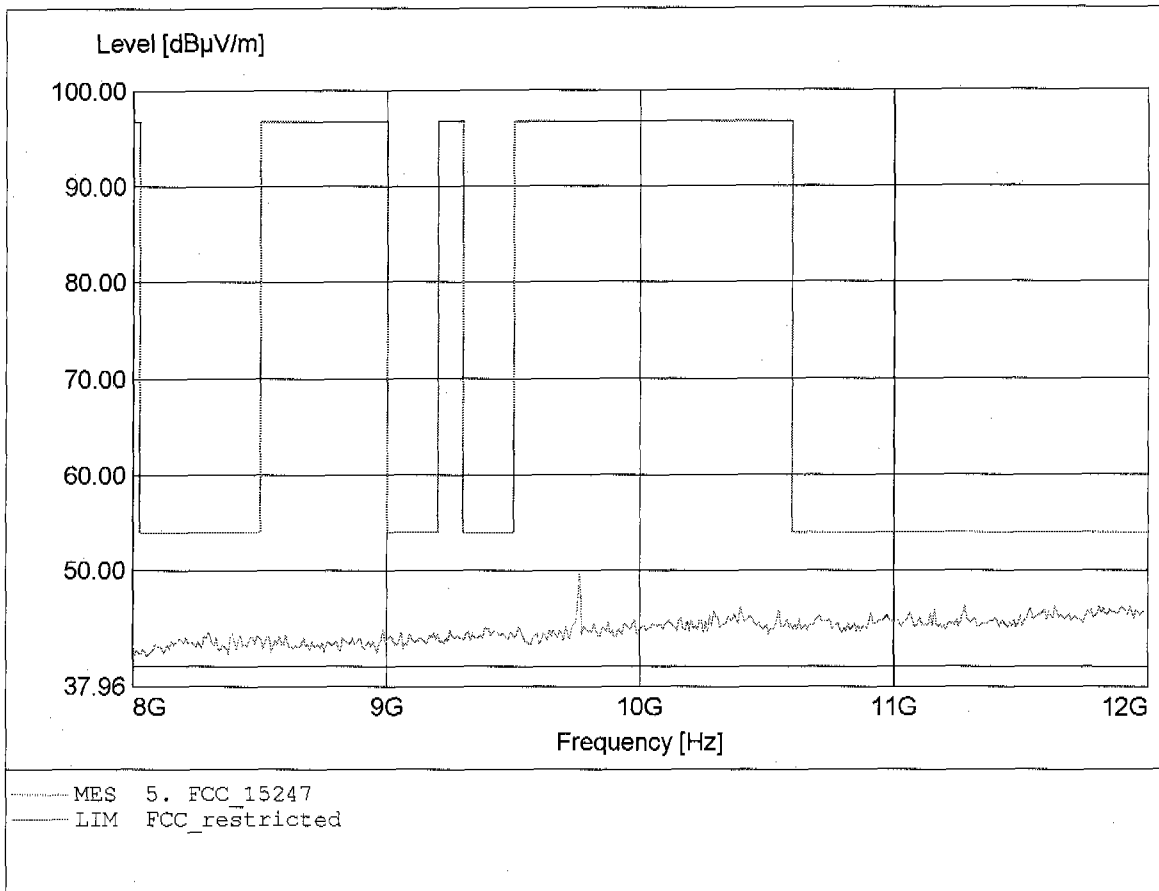


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 47 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.764GHz, Emax: 53.61dBµV/m, RBW: 1MHz

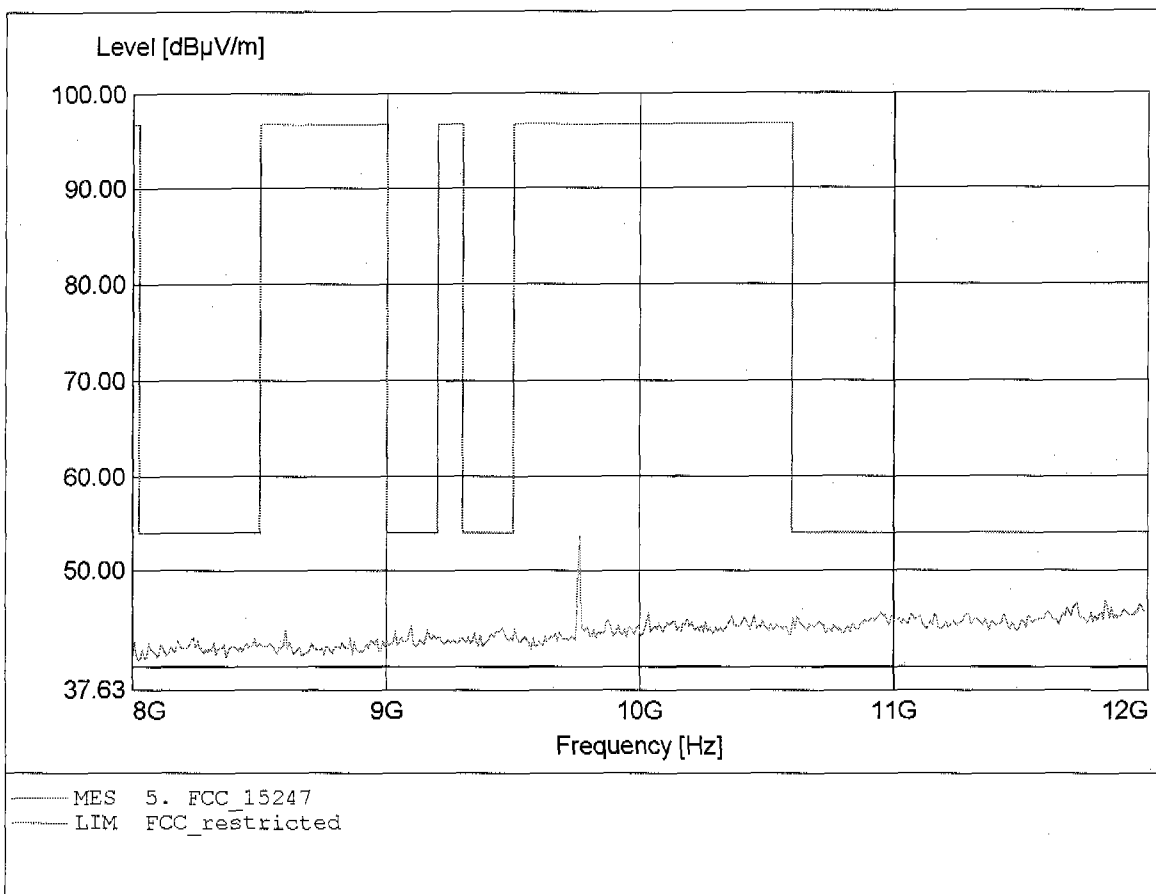


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 47 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 14.802GHz, Emax: 51.39dBµV/m, RBW: 1MHz

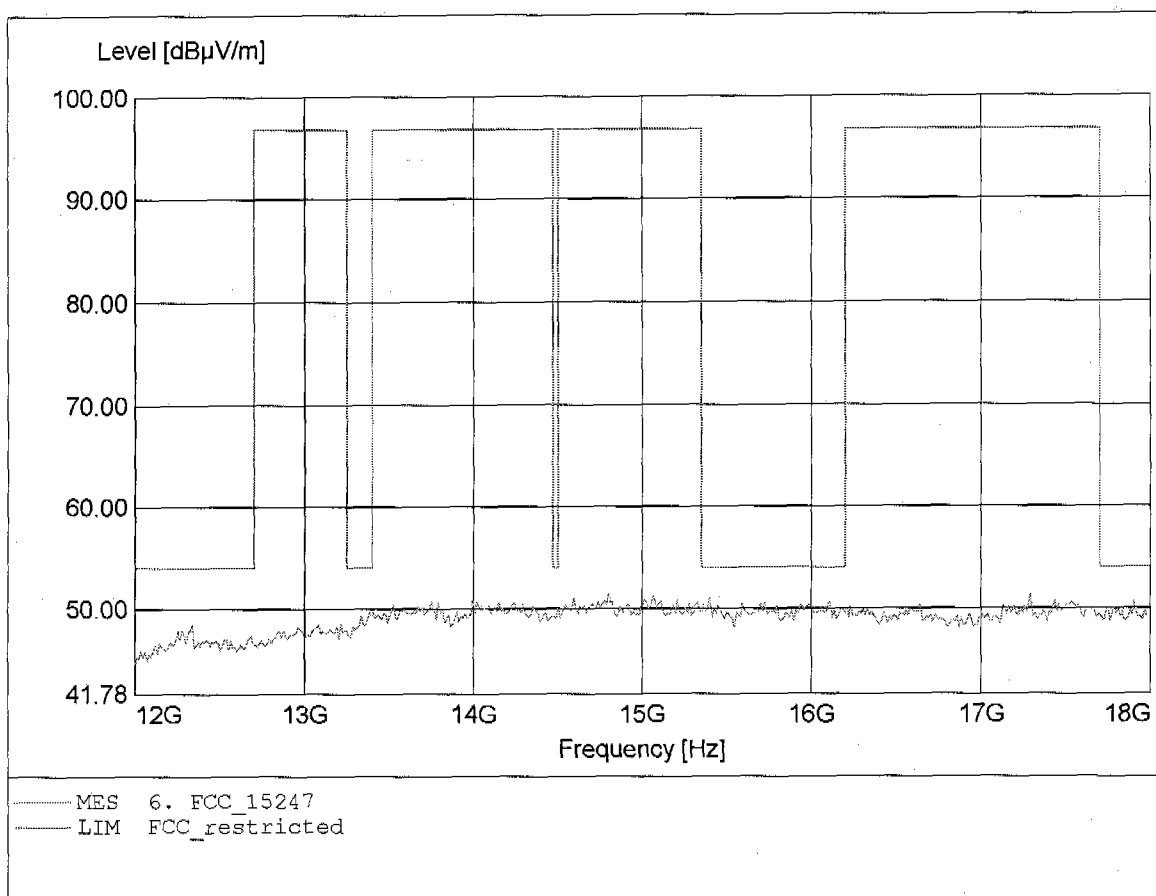


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 47 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 14.200GHz, Emax: 51.97dBµV/m, RBW: 1MHz

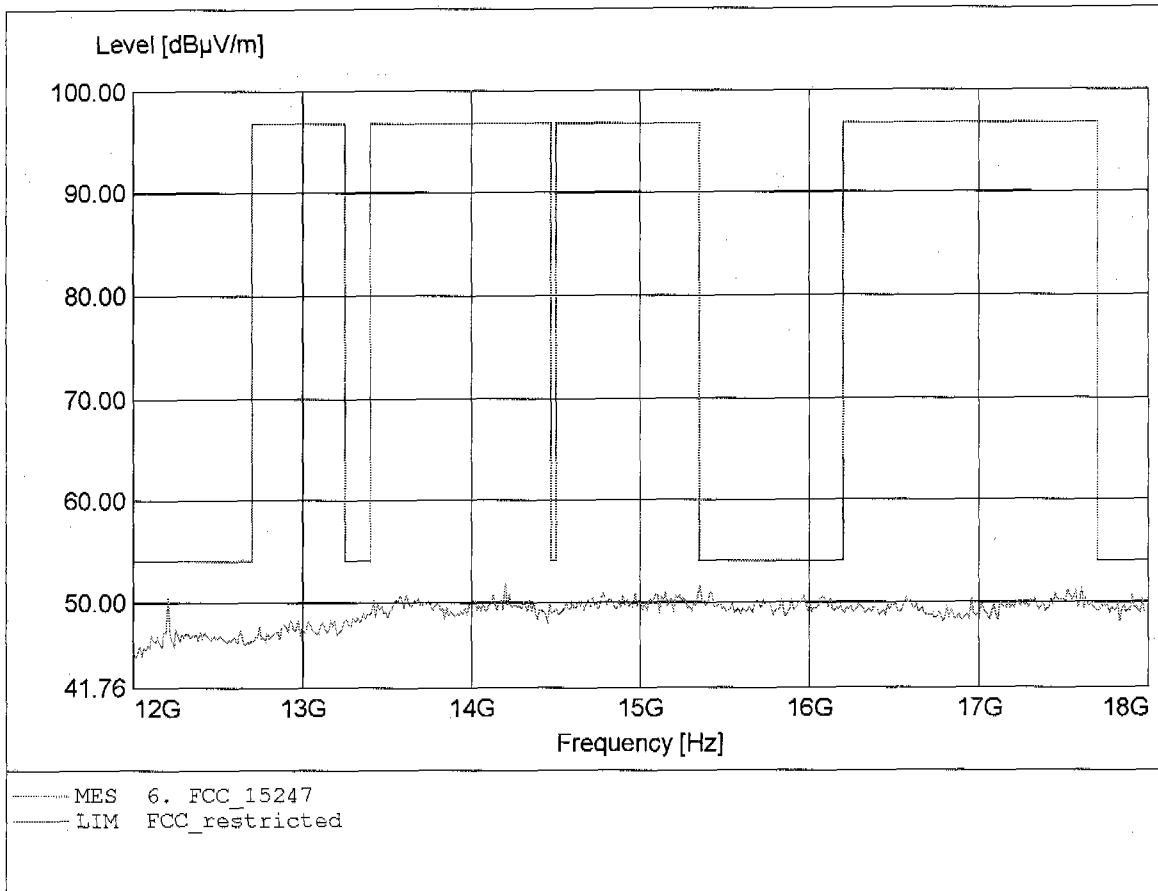


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 47 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.176GHz, Emax: 49.92dBµV/m, RBW: 1MHz

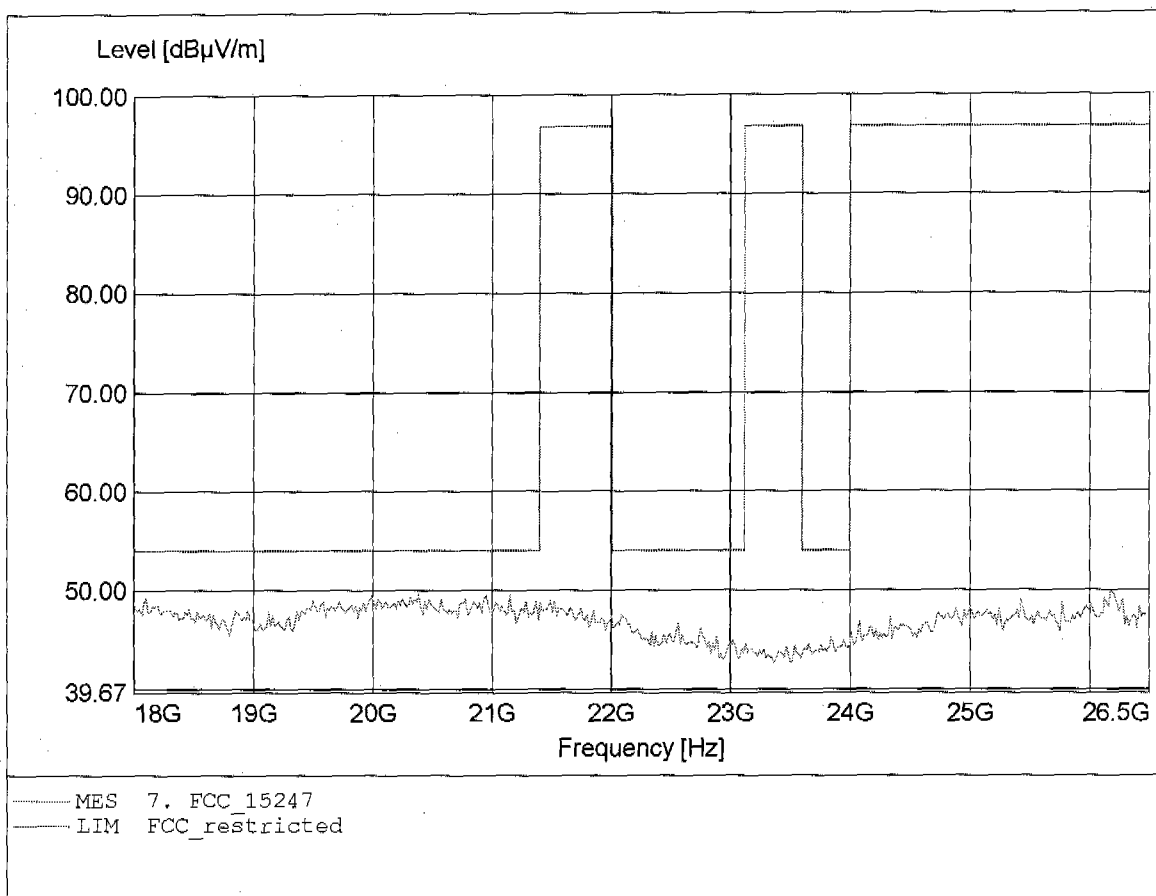


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 47 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Uncom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 20.214GHz, Emax: 49.75dBµV/m, RBW: 1MHz

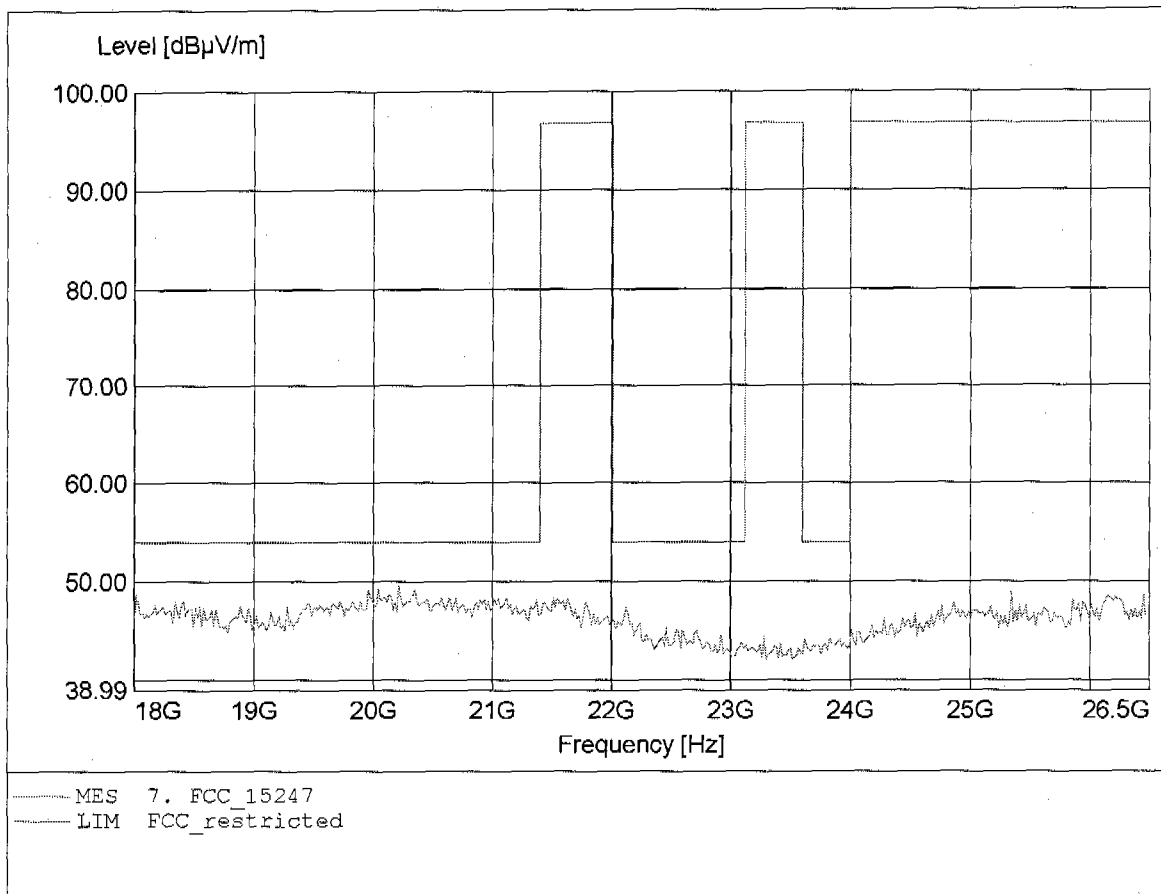


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 176.493MHz, Emax: 31.97dBµV/m, RBW: 100kHz

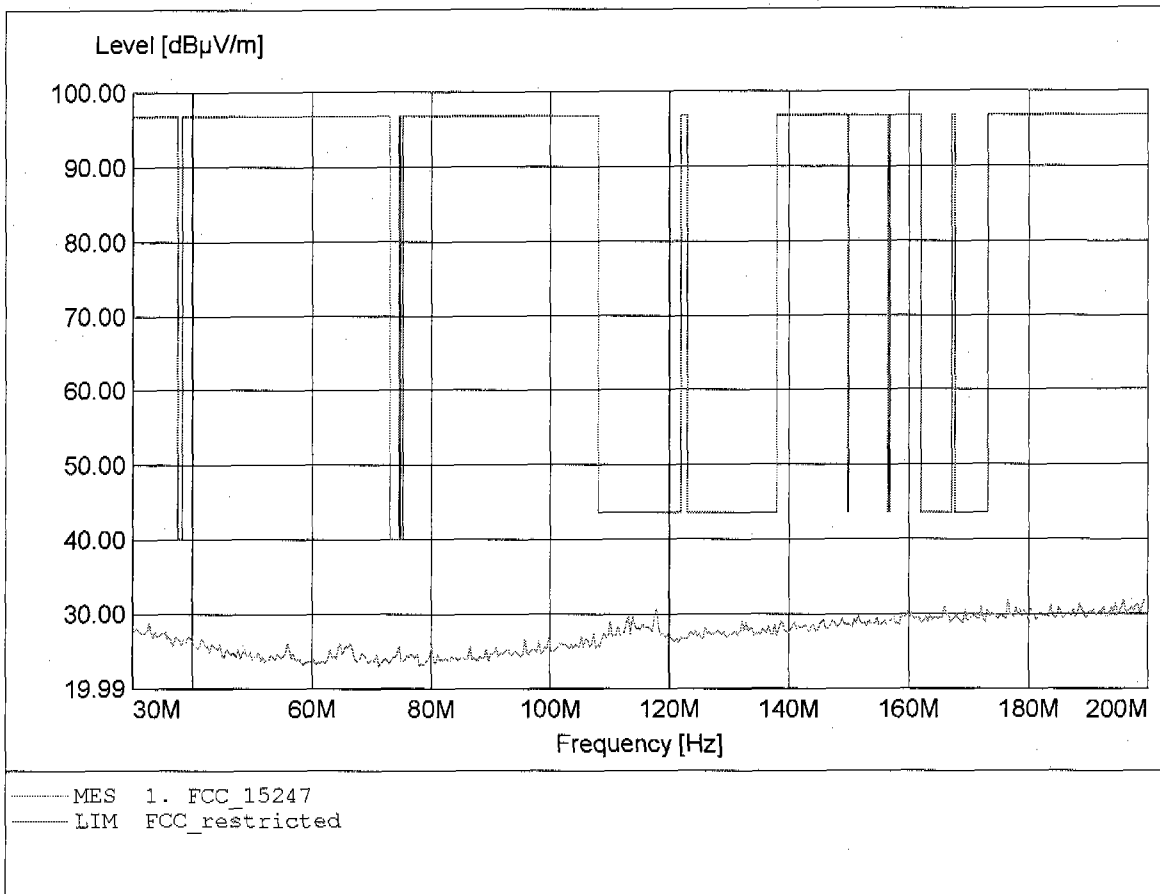


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 189.780MHz, Emax: 31.31dBµV/m, RBW: 100kHz

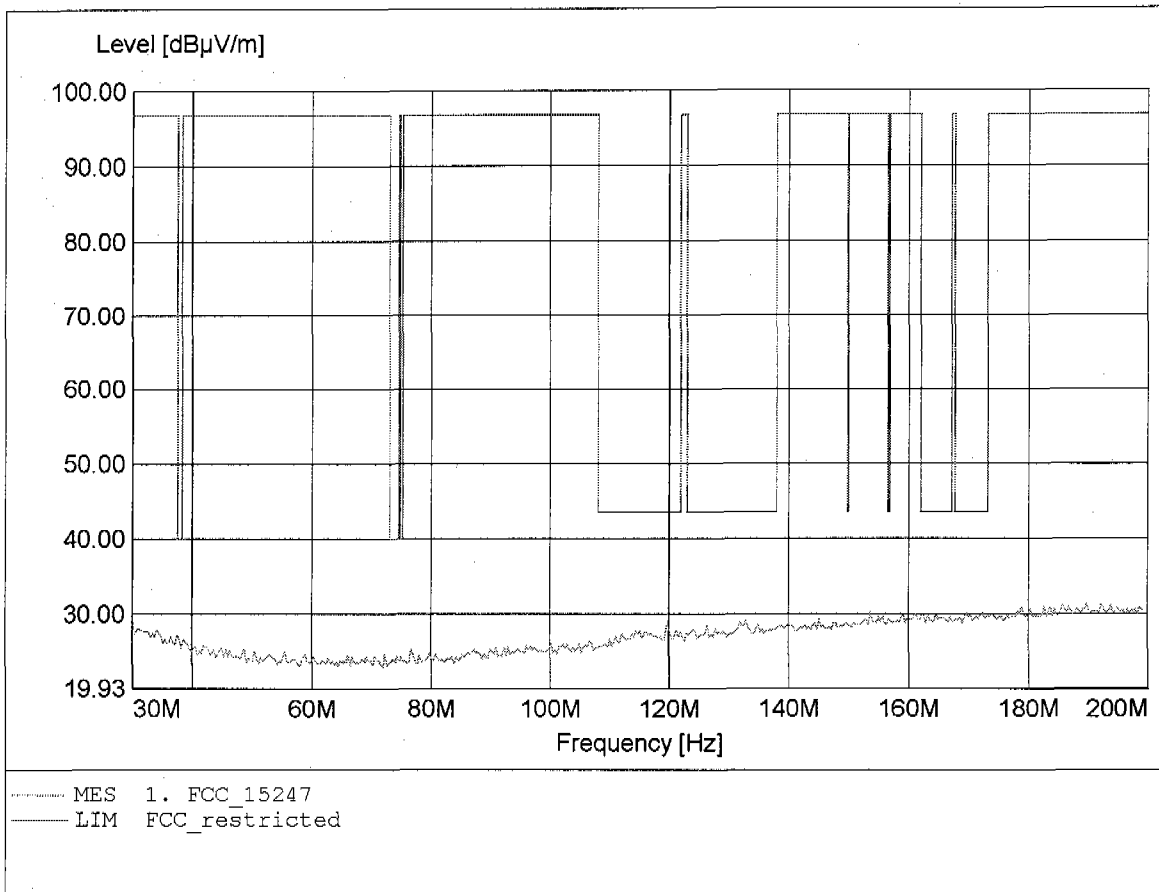


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 560.721MHz, Emax: 39.53dBµV/m, RBW: 100kHz

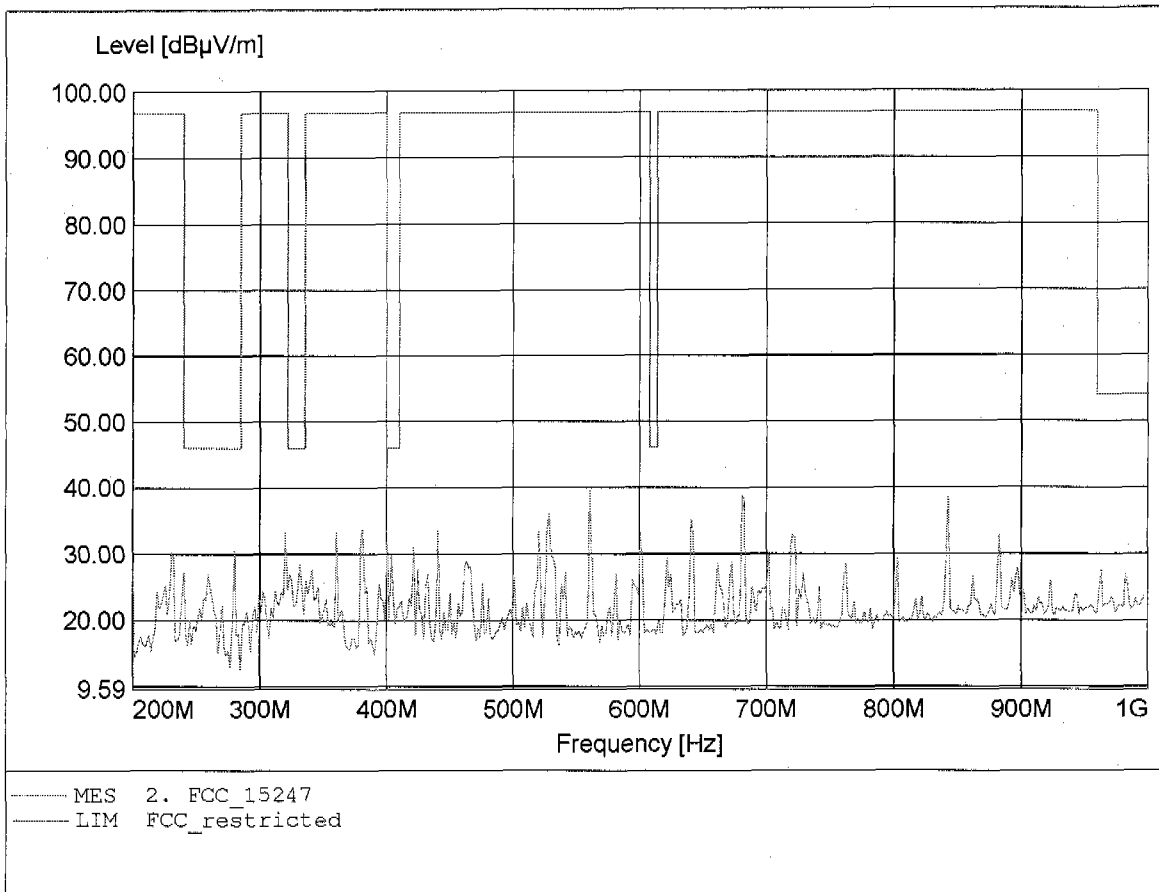


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 842.886MHz, Emax: 39.15dBµV/m, RBW: 100kHz

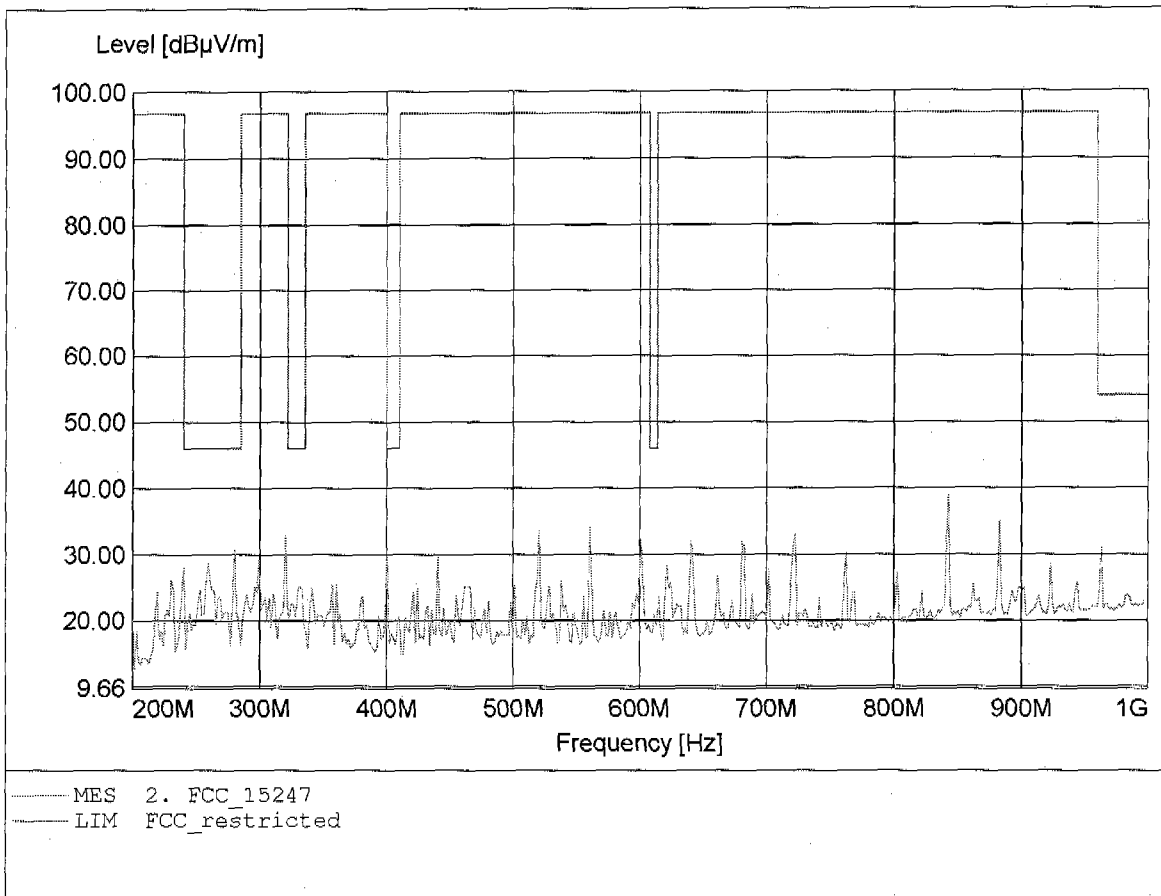


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.484GHz, Emax: 98.88dBµV/m, RBW: 1MHz

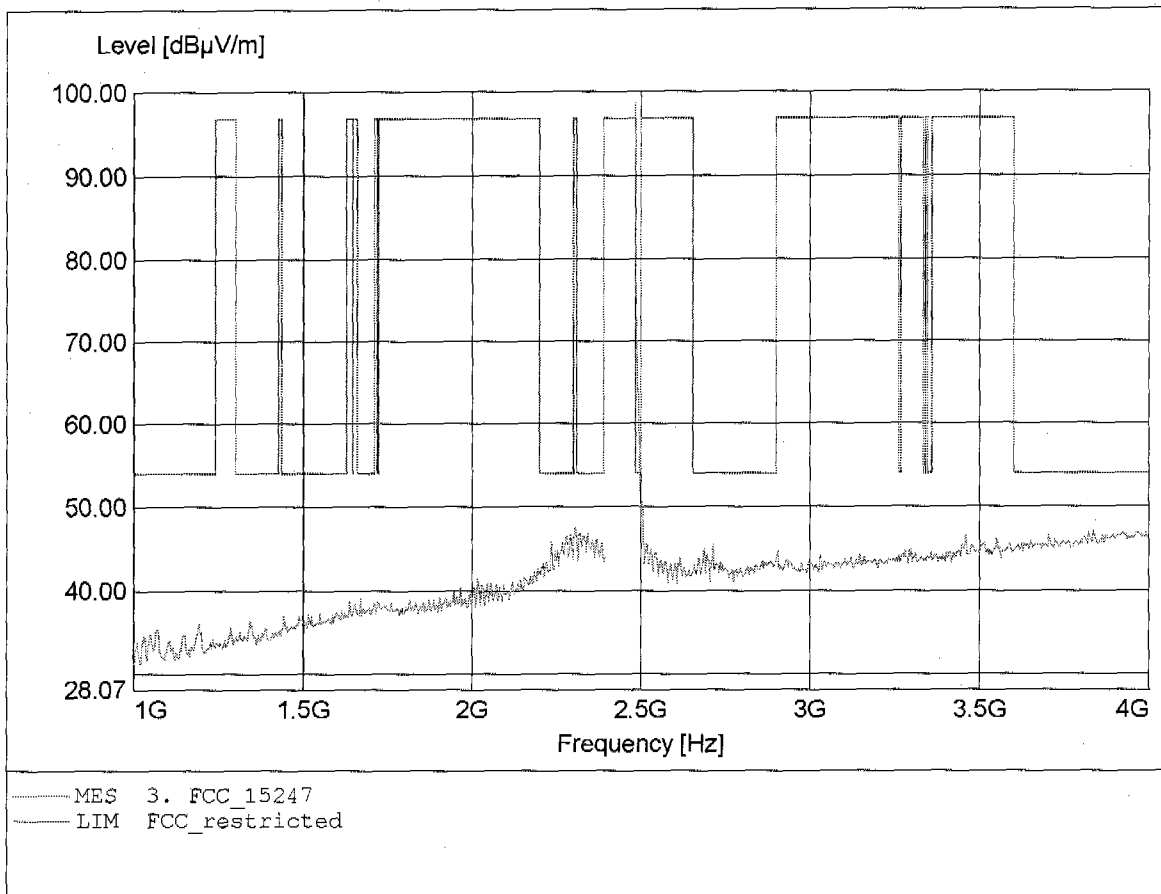


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.484GHz, Emax: 98.88dBµV/m, RBW: 1MHz

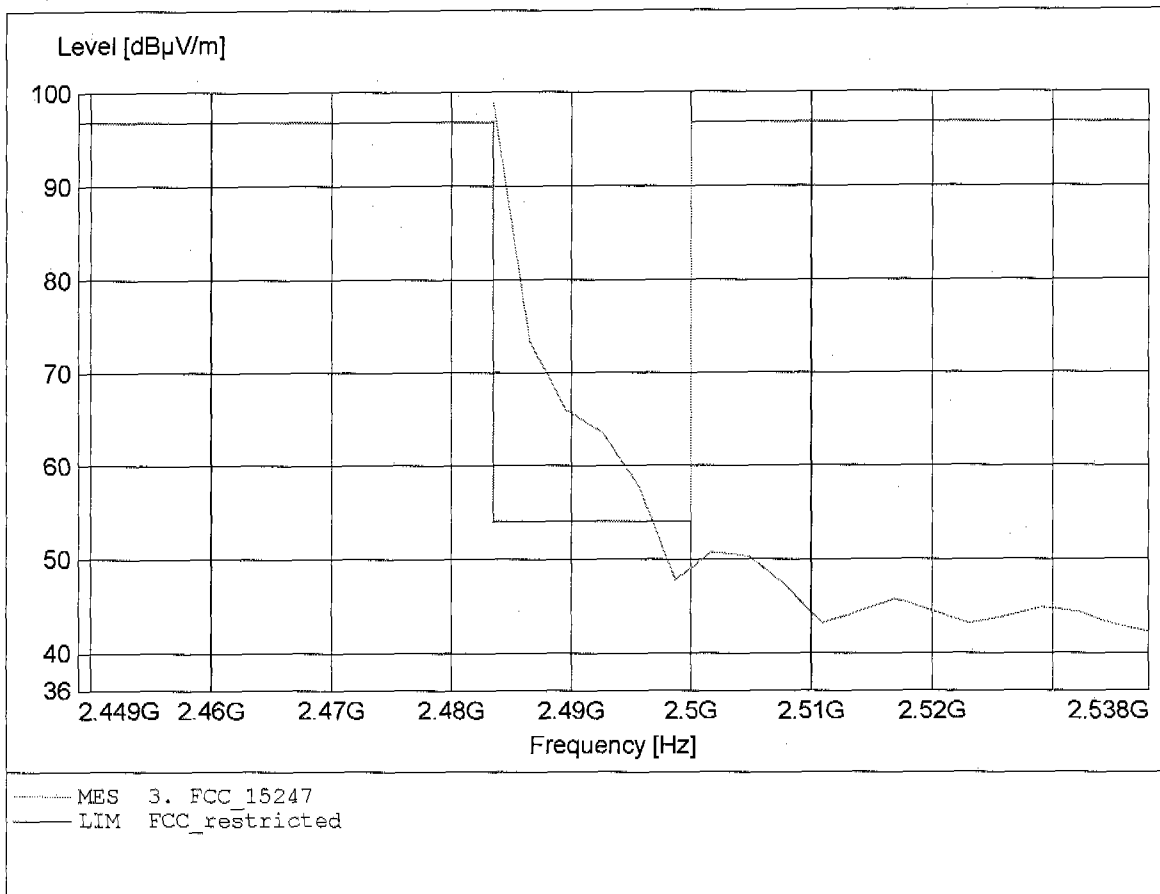


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.484GHz, Emax: 92.35dBµV/m, RBW: 1MHz

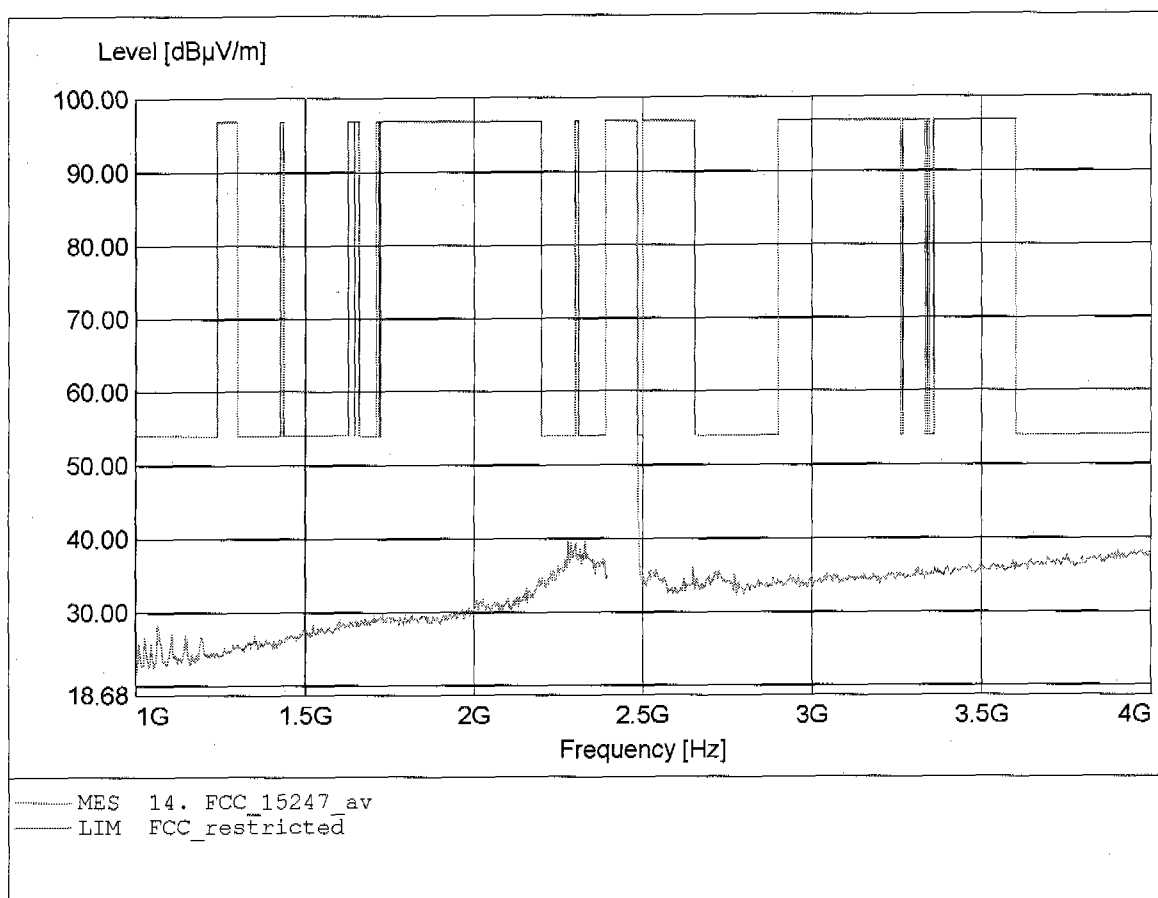


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
 EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 2
 Model: GN Ellipse 2.4
 Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
 Test Site / Operator: ETS / Mr. Handrik
 Test Specification: according to §15.247, average detector
 Comment 1: Dist.: 3m, Ant.: HL025, amplif.
 Comment 2: Freq: 2.484GHz, Emax: 92.35dBµV/m, RBW: 1MHz

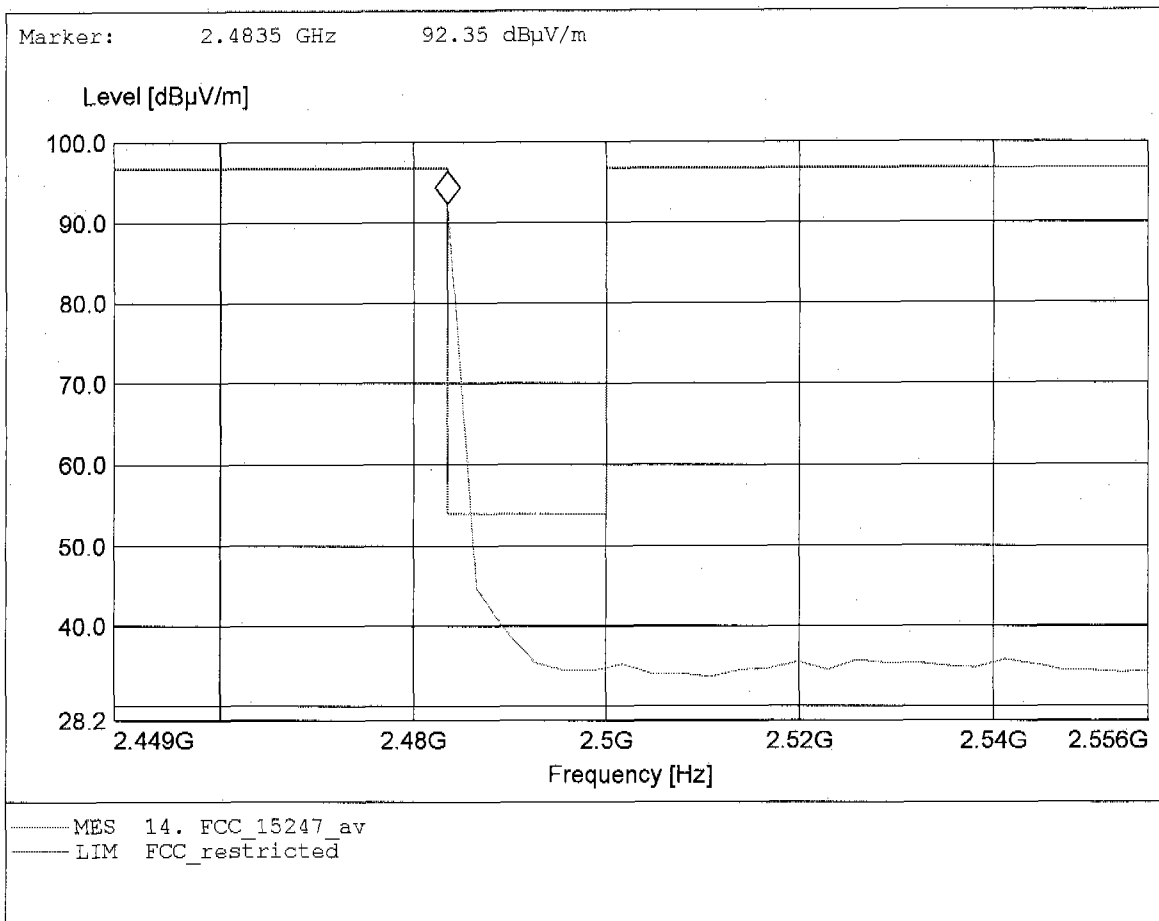


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.484GHz, Emax: 93.18dBµV/m, RBW: 1MHz

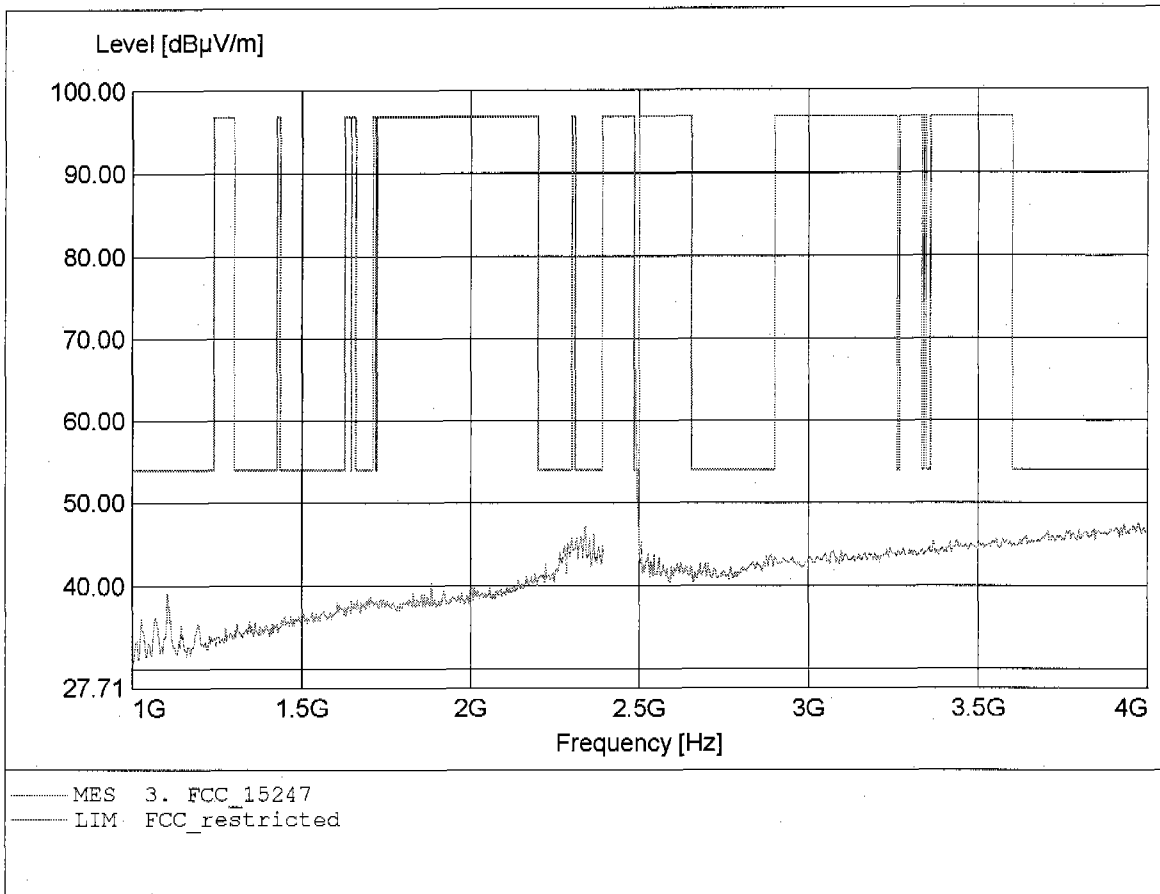


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.484GHz, Emax: 93.18dBµV/m, RBW: 1MHz

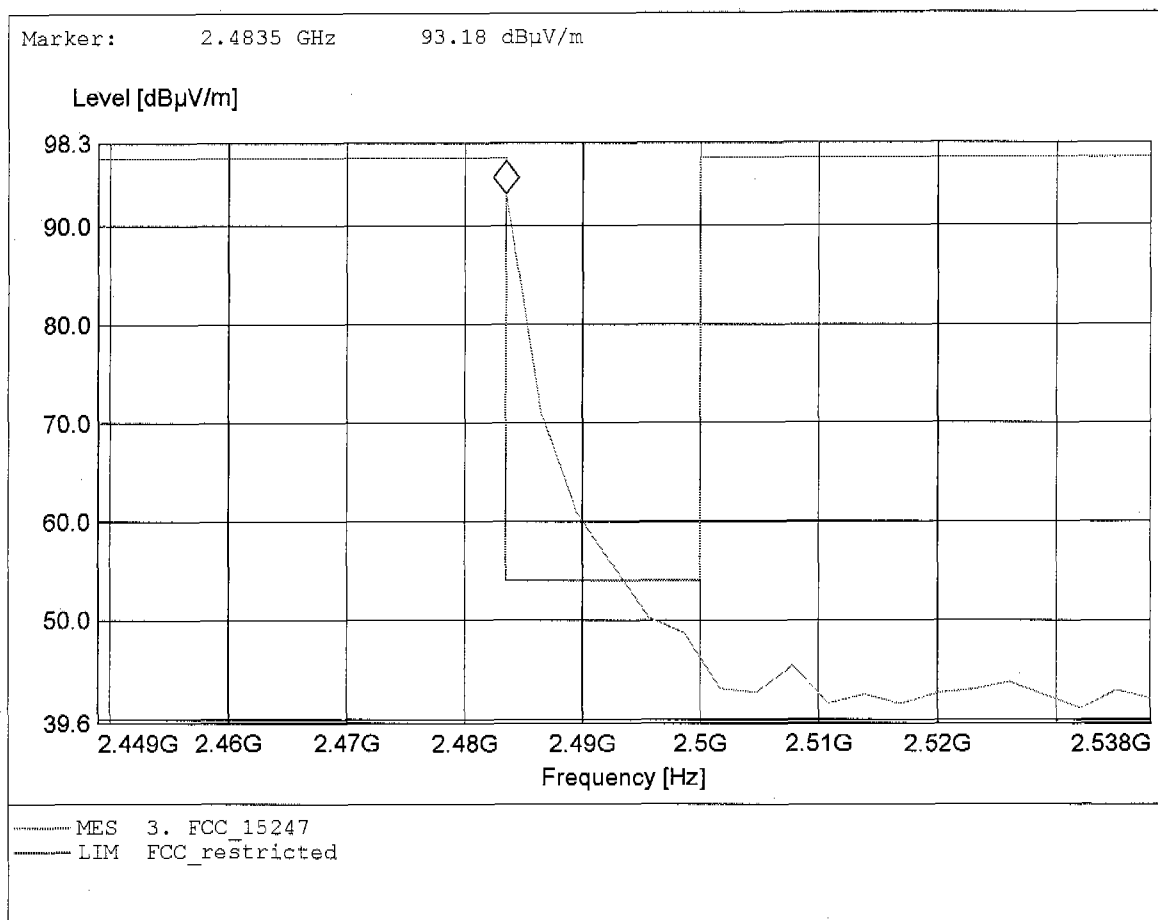


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.484GHz, Emax: 92.46dBµV/m, RBW: 1MHz

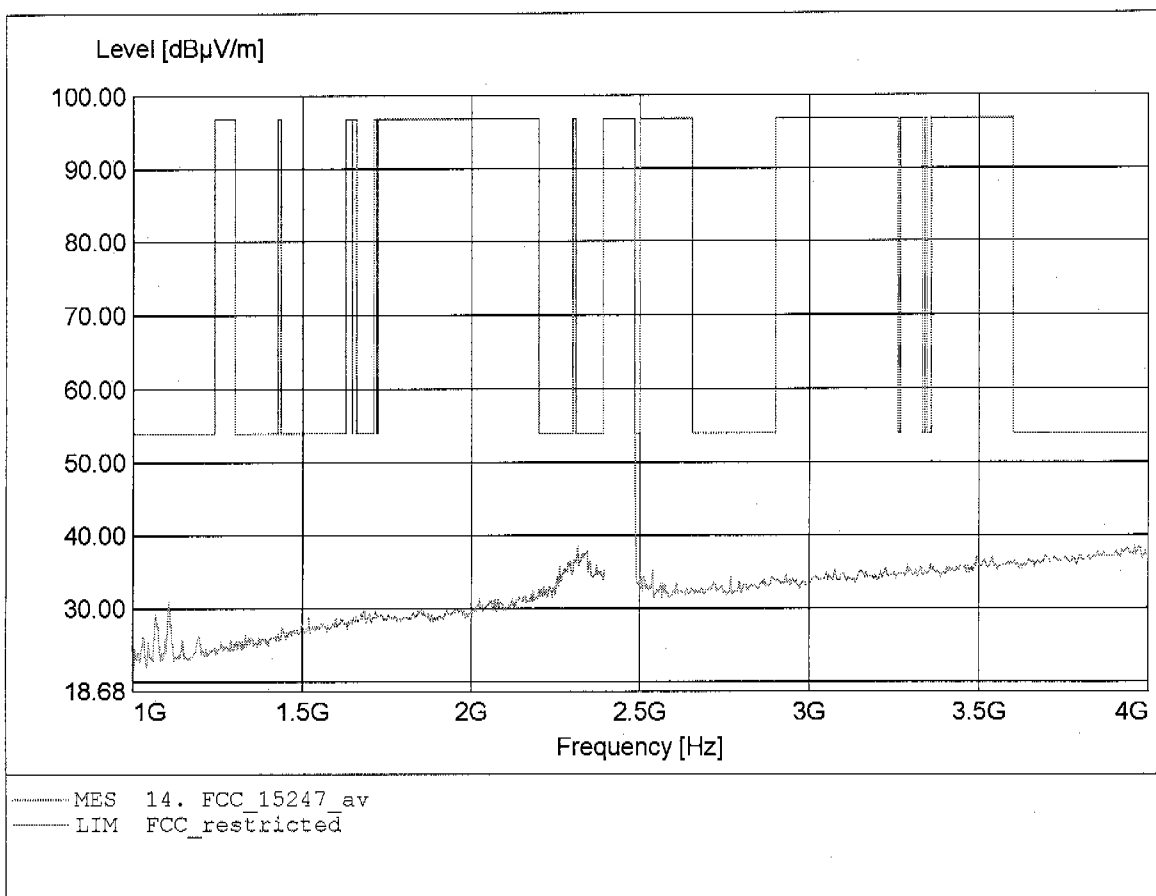


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.484GHz, Emax: 92.46dBµV/m, RBW: 1MHz

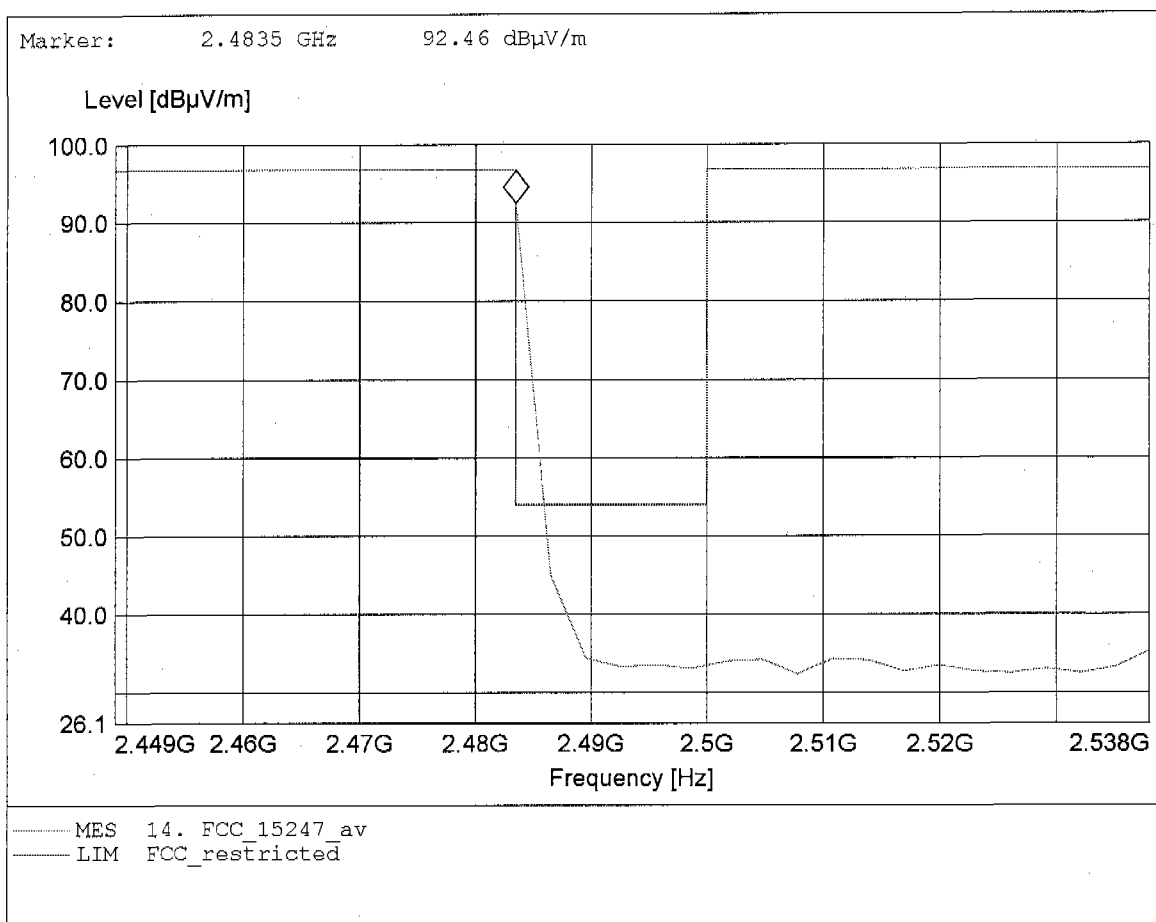


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 4.962GHz, Emax: 64.95dBµV/m, RBW: 1MHz

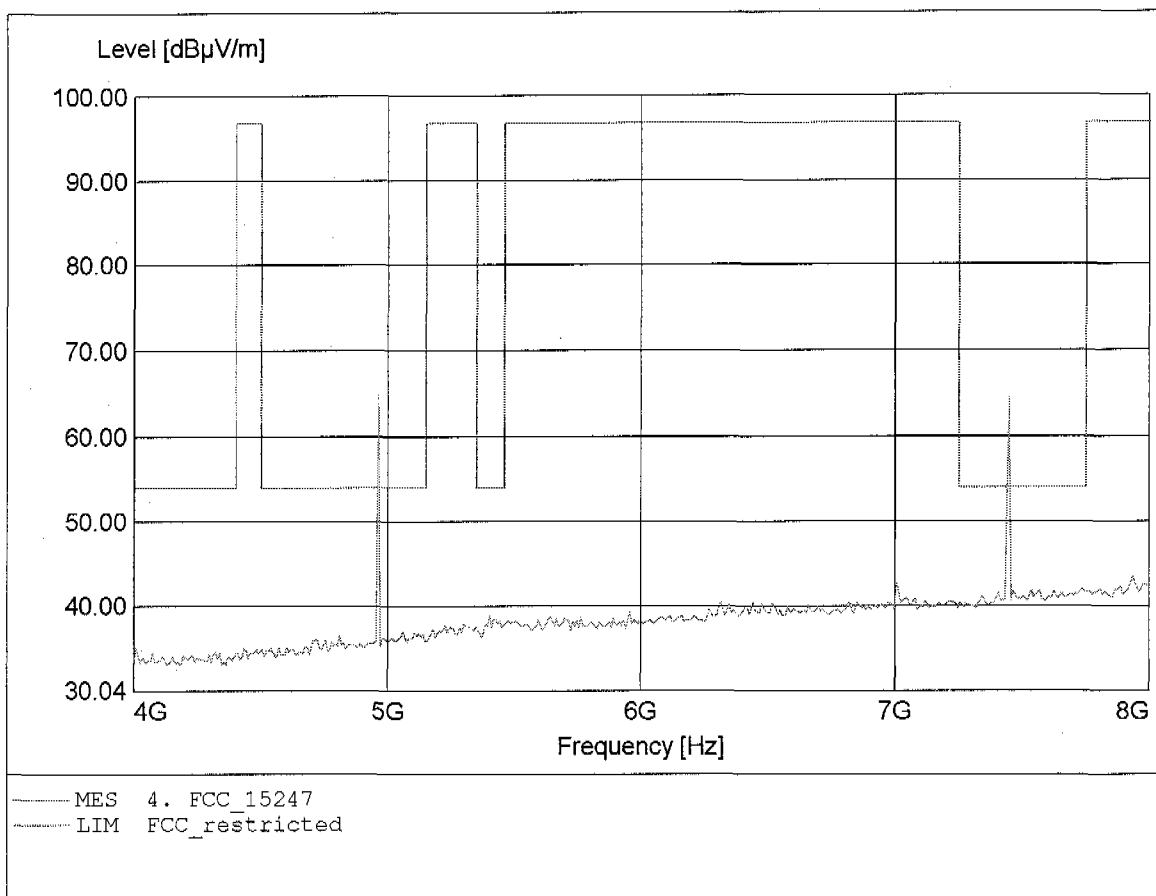


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.447GHz, Emax: 39.78dBµV/m, RBW: 1MHz

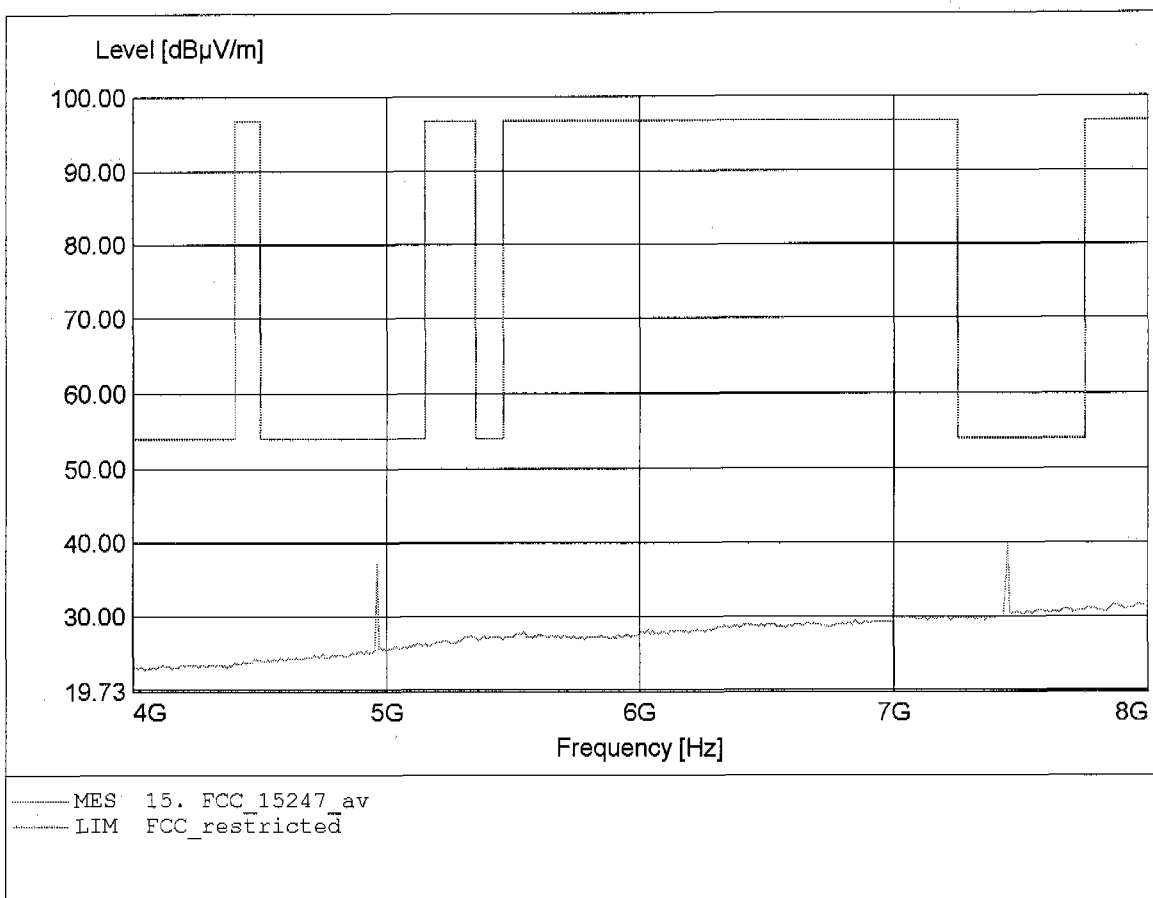


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 4.962GHz, Emax: 59.07dBµV/m, RBW: 1MHz

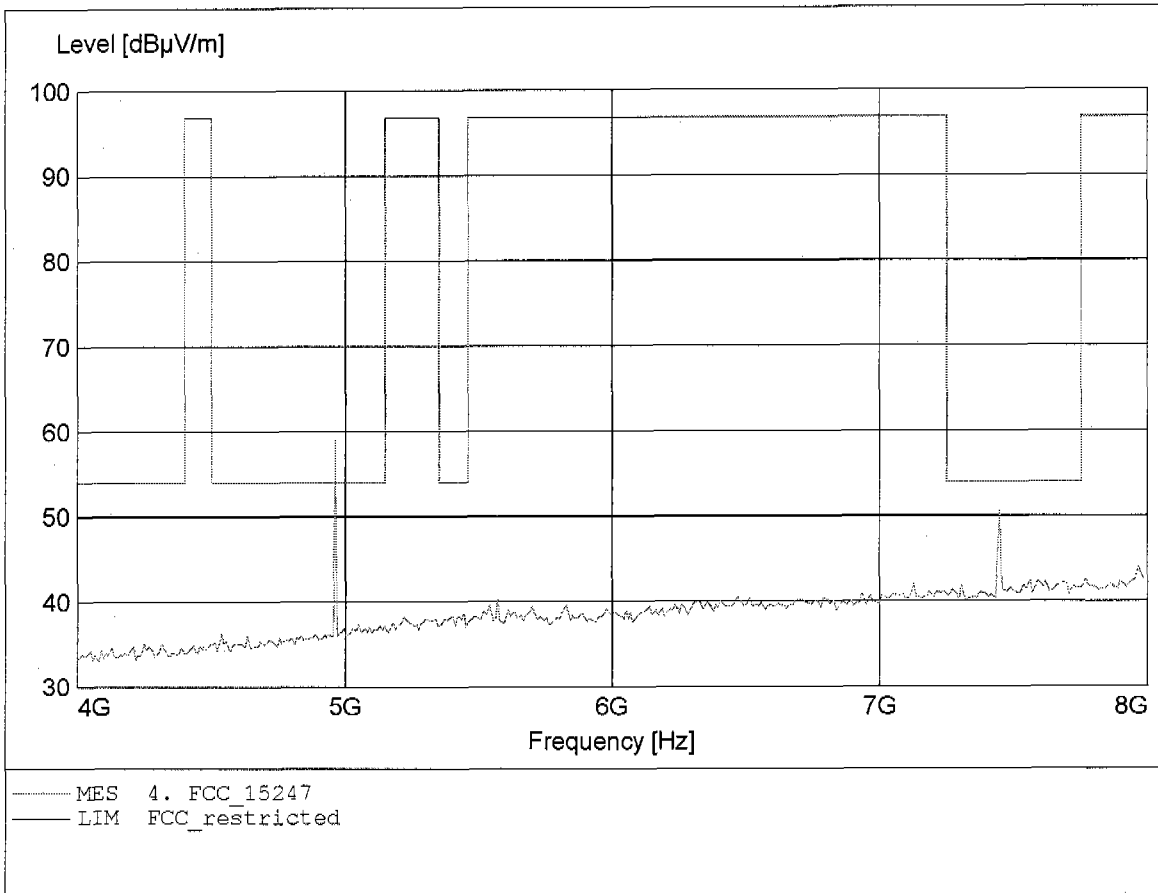


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 4.962GHz, Emax: 34.02dBµV/m, RBW: 1MHz

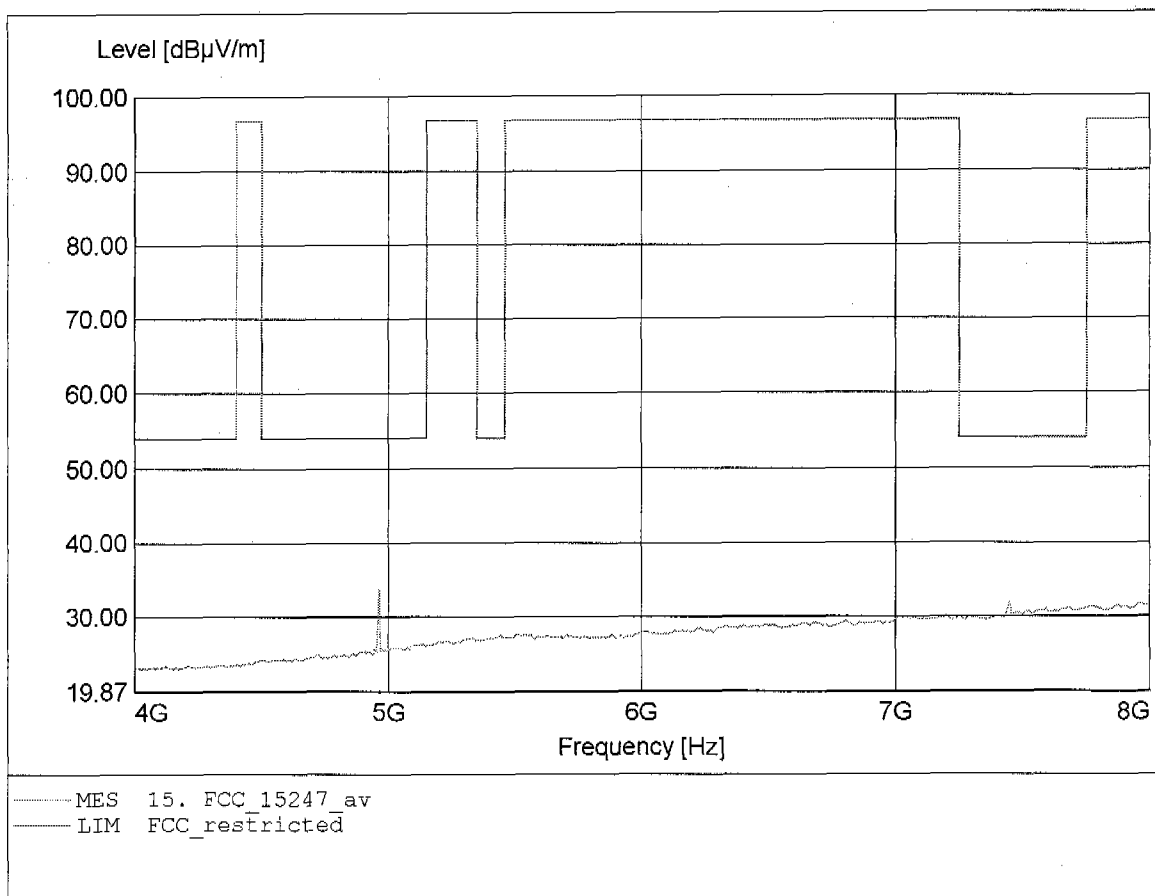


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.932GHz, Emax: 55.21dBµV/m, RBW: 1MHz

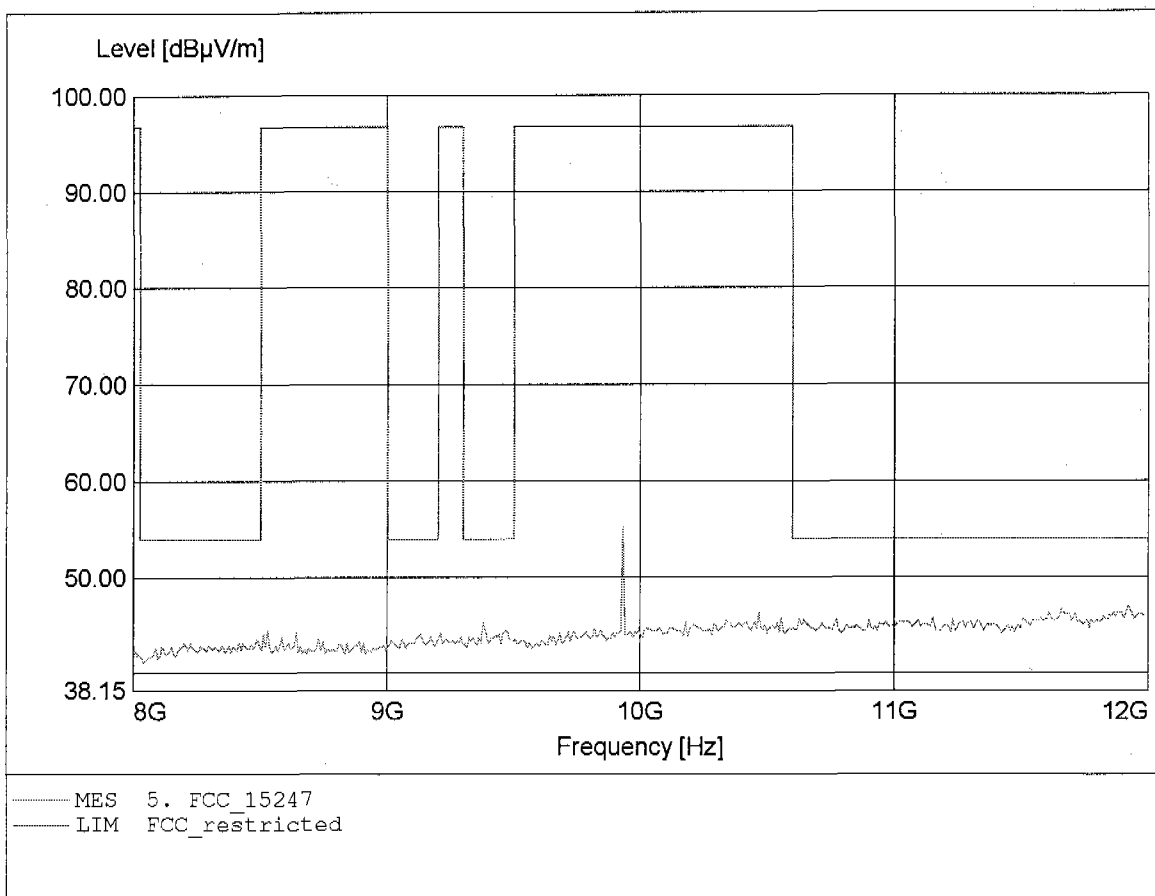


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.932GHz, Emax: 53.36dBµV/m, RBW: 1MHz

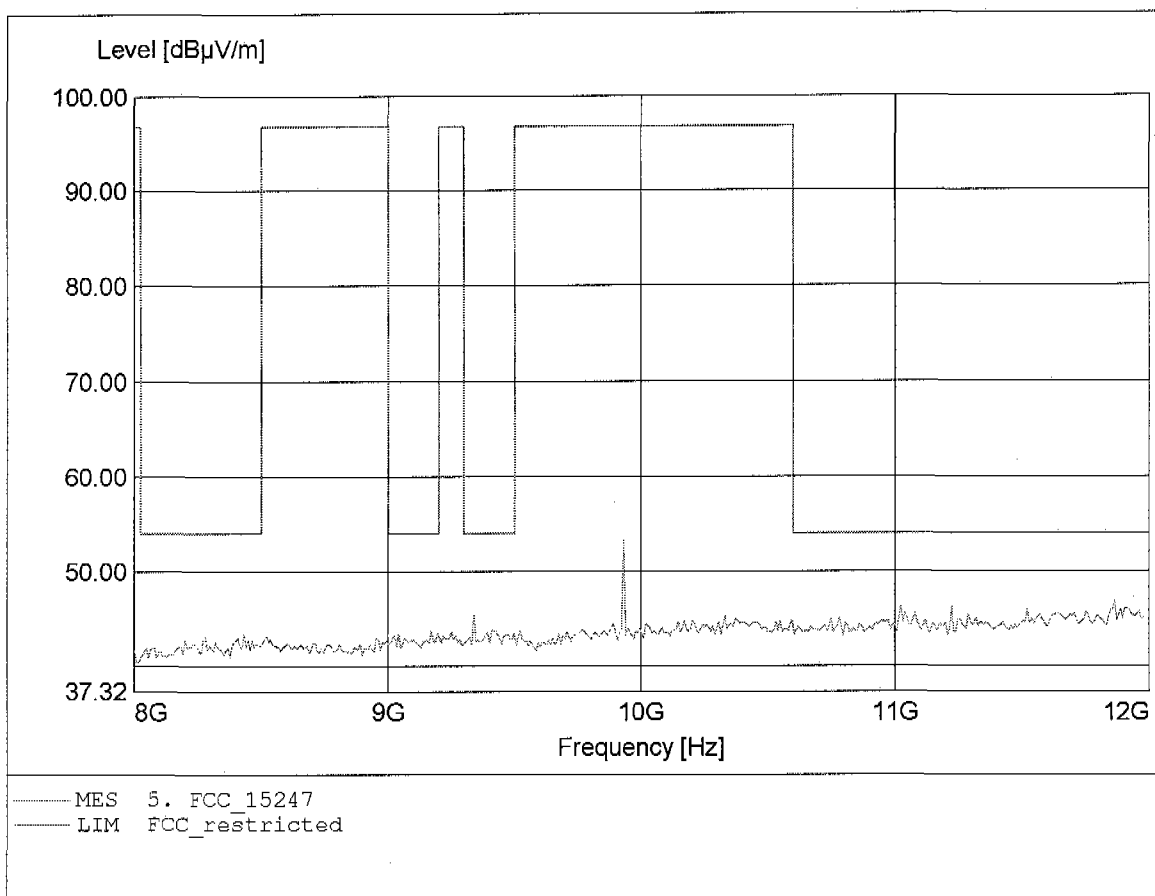


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 14.778GHz, Emax: 51.35dBµV/m, RBW: 1MHz

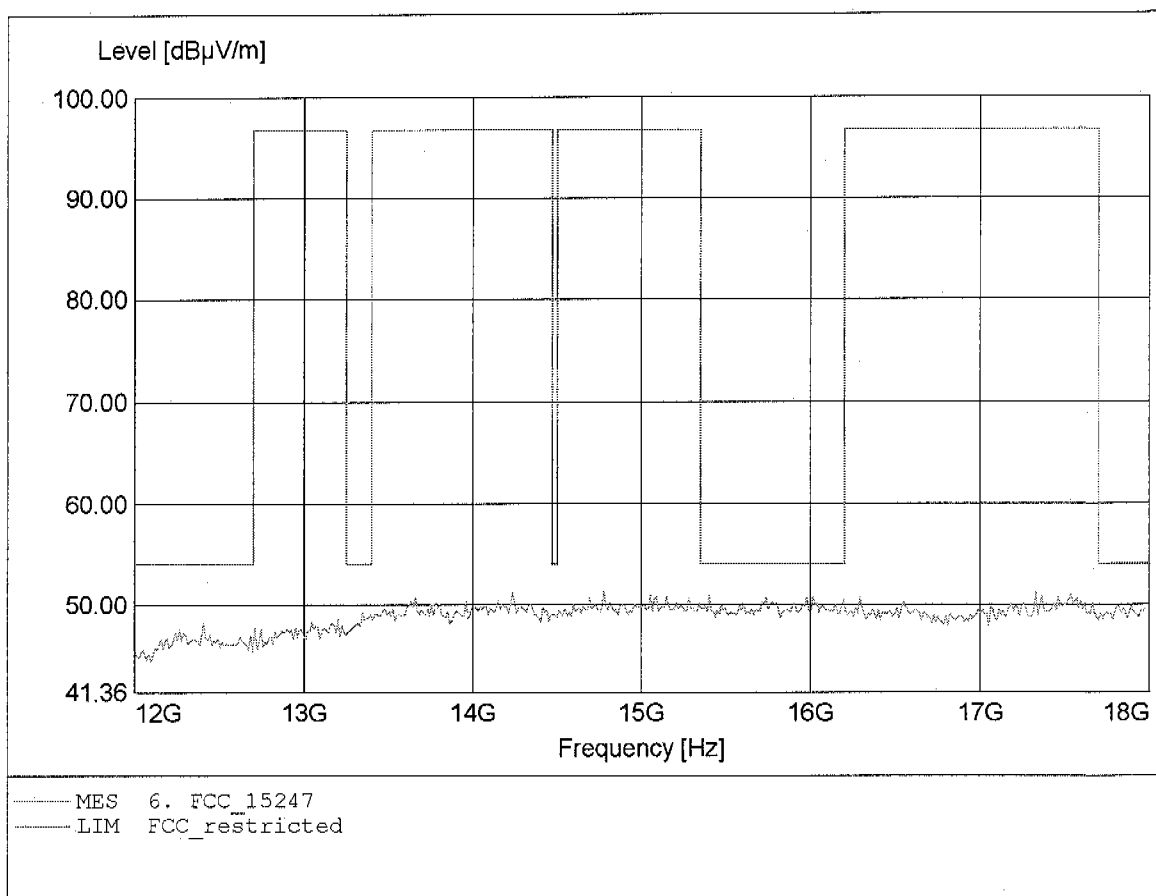


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 15.956GHz, Emax: 51.17dBµV/m, RBW: 1MHz

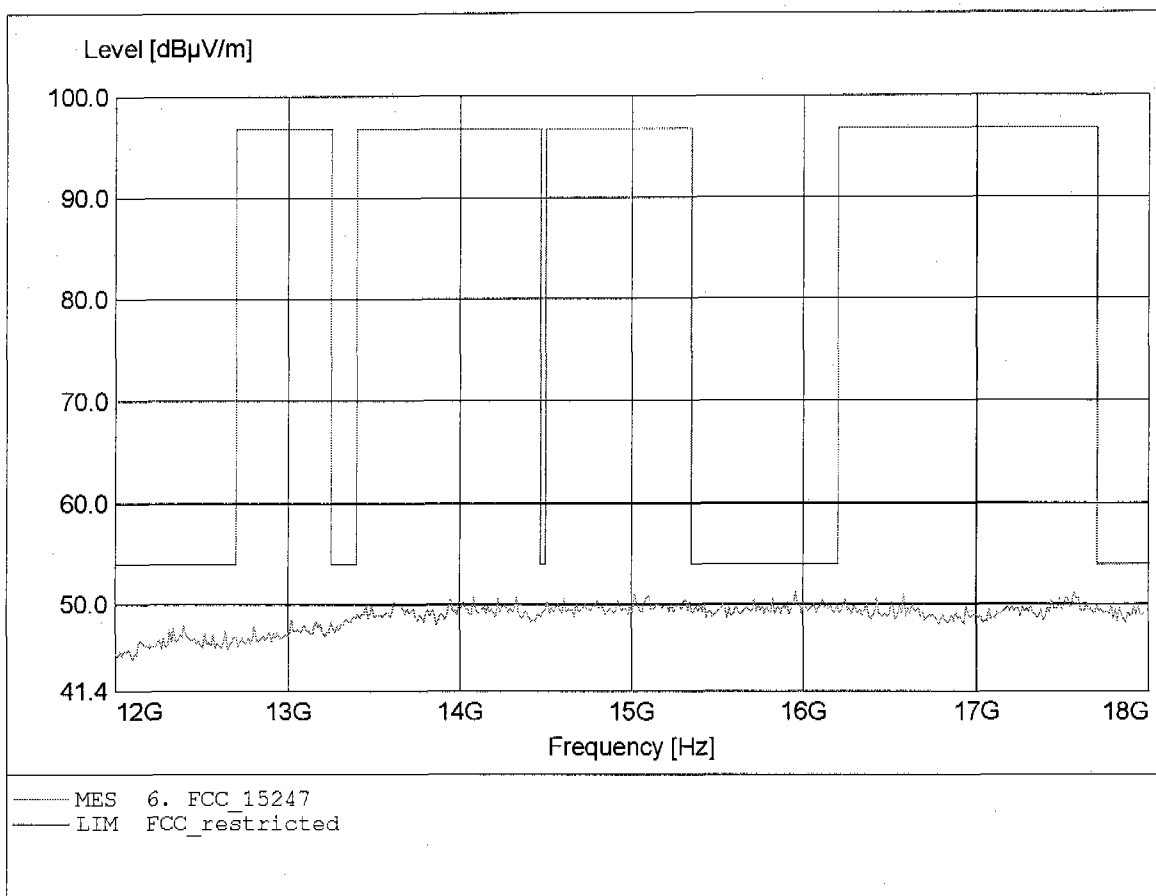


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 20.436GHz, Emax: 49.89dBµV/m, RBW: 1MHz

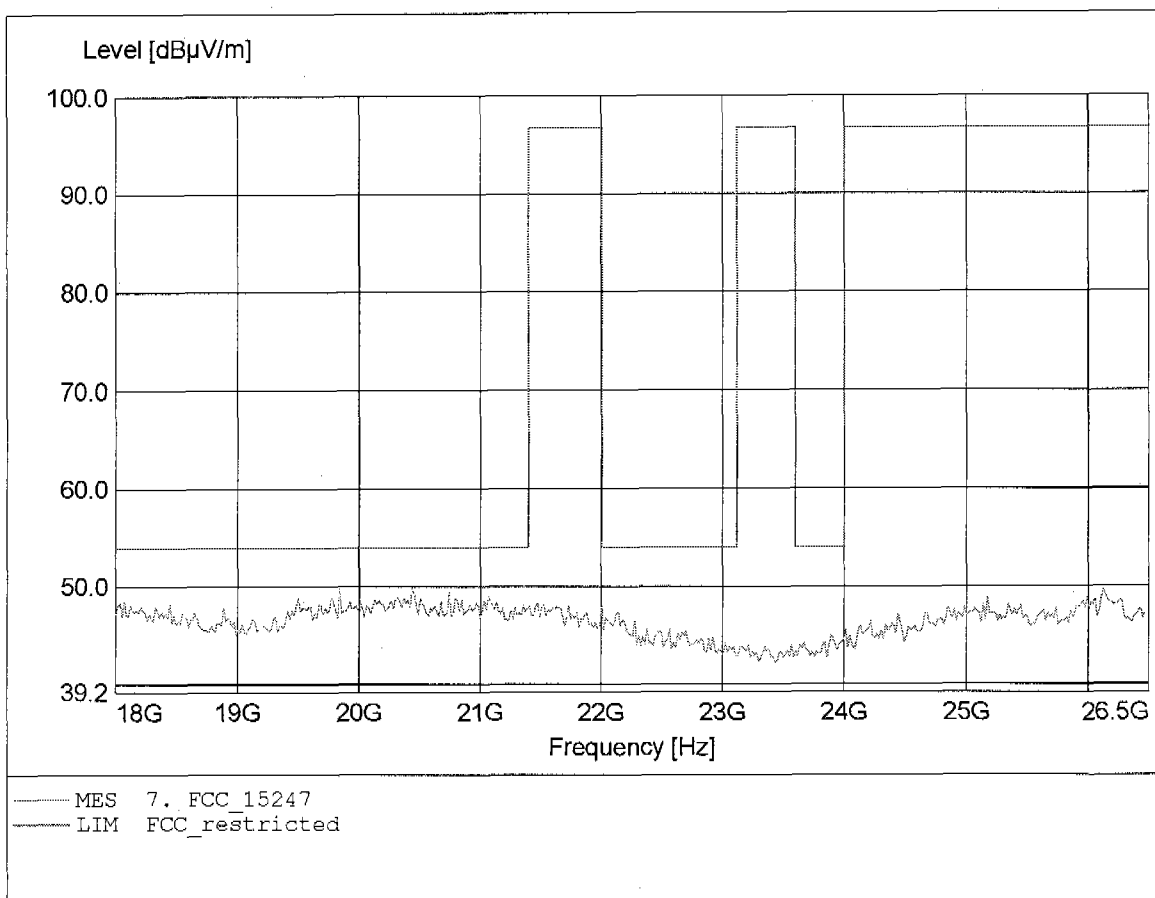

**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom A/S
EUT: Wireless Headset System / Base / Ch.: 94 / Ant. 2
Model: GN Ellipse 2.4
Temperature/ Voltage: Temp.: 23°C, Unom.: 120 VAC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 21.288GHz, Emax: 49.95dBµV/m, RBW: 1MHz

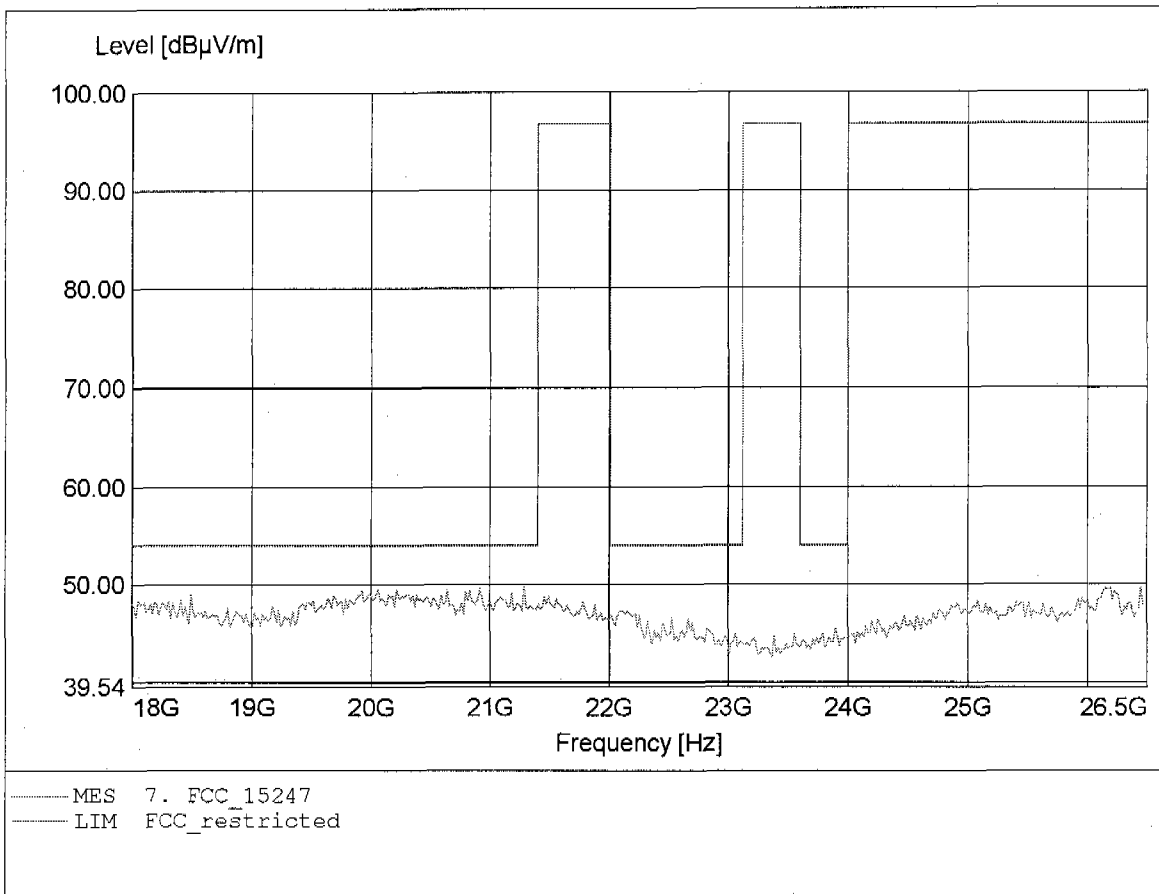



Appendix D

Spurious Emissions conducted - Transmitter operating




Appendix E

Carrier Frequency Separation



Delta 1 [T1] RBW 100 kHz RF Att 40 dB
Ref Lvl -0.00 dB VBW 100 kHz
25 dBm 864.12825651 kHz SWT 5 ms Unit dBm

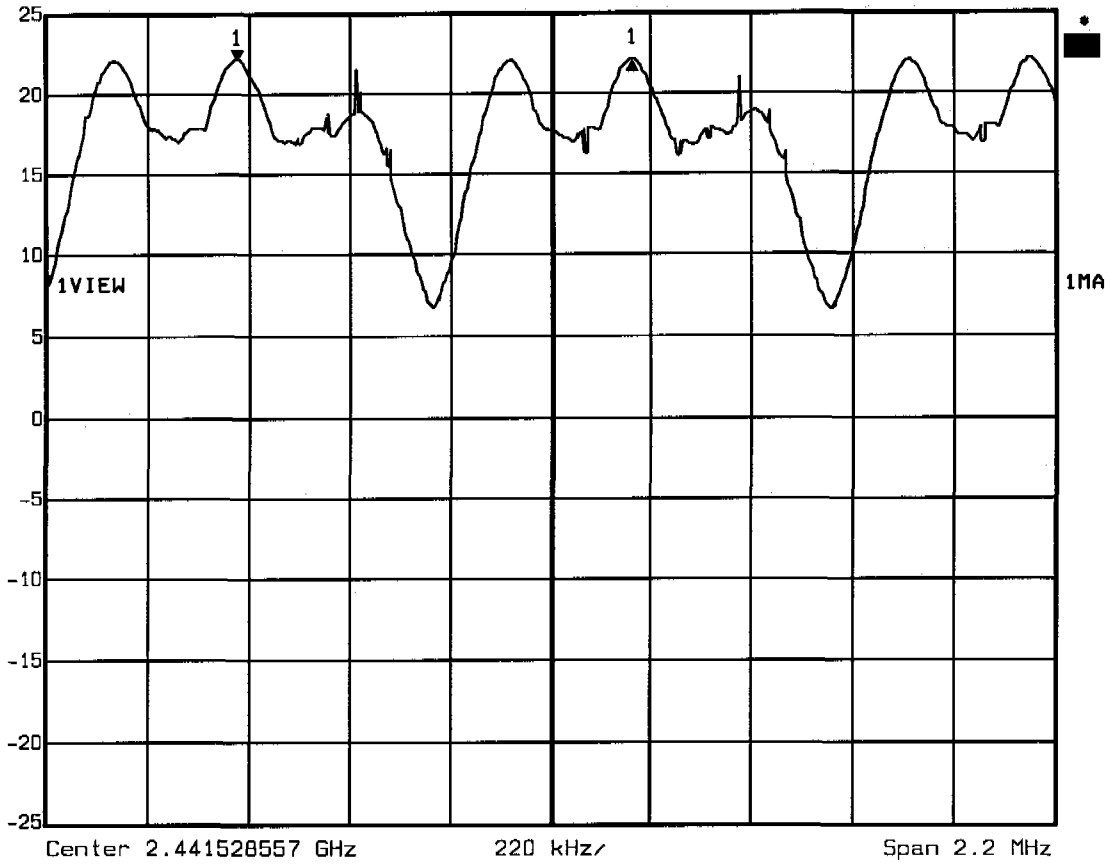

Title: Carrier Frequency Separation
Comment A: GN Netcom Cordless Headset 264 FCC Base
Date: 22.MAR.2005 12:41:12




Appendix F

Number of Hopping Frequencies




Ref Lvl 25 dBm
Marker 1 [T1] 22.09 dBm
2.41494890 GHz
RBW 300 kHz RF Att 50 dB
VBW 300 kHz
SWT 5 ms Unit dBm

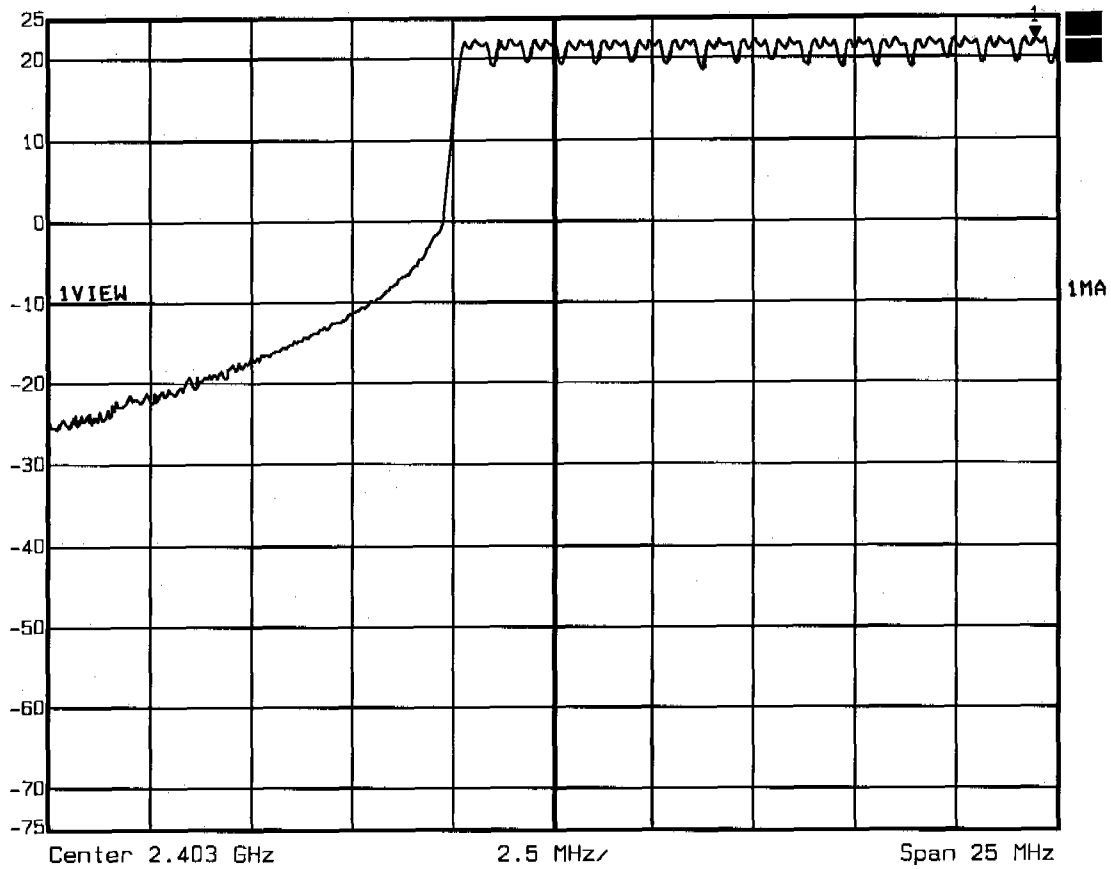

Title: Number of Hopping Frequencies Ch.: 0-17
Comment A: GN Netcom Cordless Headset 264 FCC Base
Date: 22.MAR.2005 12:52:27




Marker 1 [T1] RBW 300 kHz RF Att 50 dB
Ref Lvl 21.99 dBm VBW 300 kHz
25 dBm 2.43569038 GHz SWT 5 ms Unit dBm

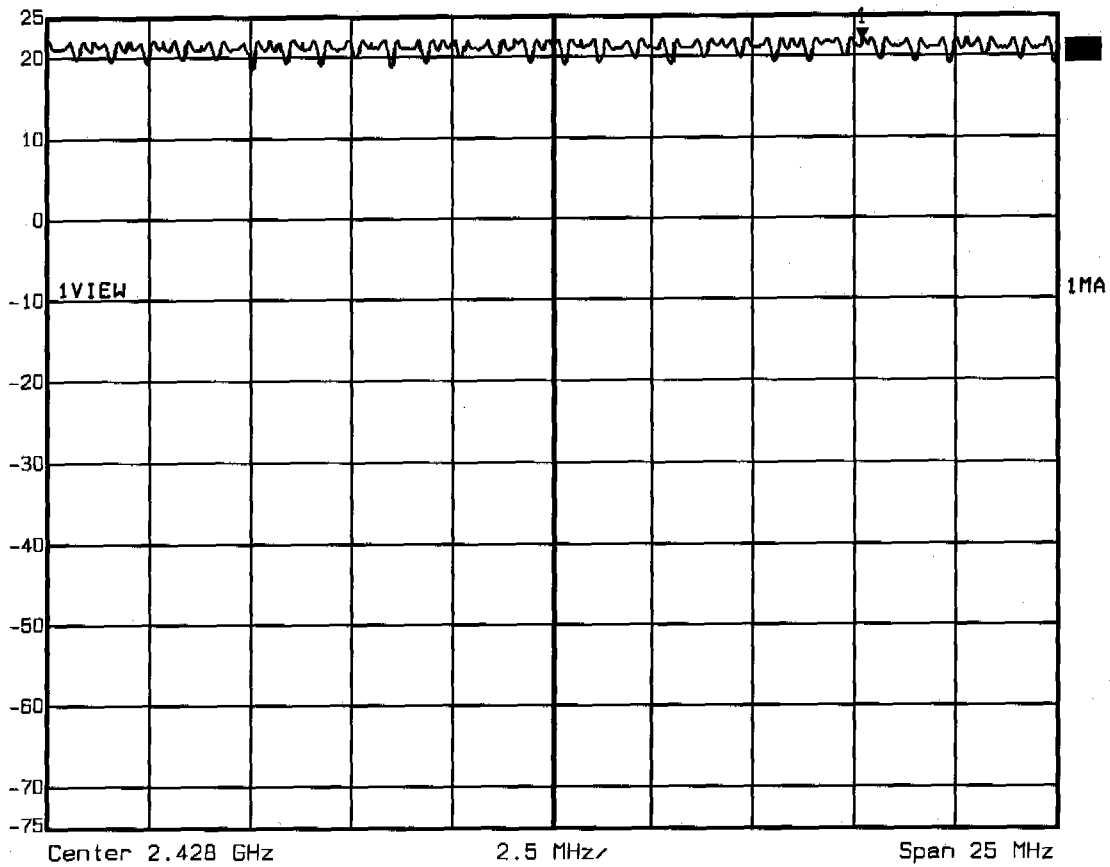

Title: Number of Hopping Frequencies Ch.: 17-46
Comment A: GN Netcom Cordless Headset 264 FCC Base
Date: 22.MAR.2005 13:10:28




Marker 1 [T1] RBW 300 kHz RF Att 50 dB
Ref Lvl 21.85 dBm VBW 300 kHz
25 dBm 2.45527956 GHz SWT 5 ms Unit dBm

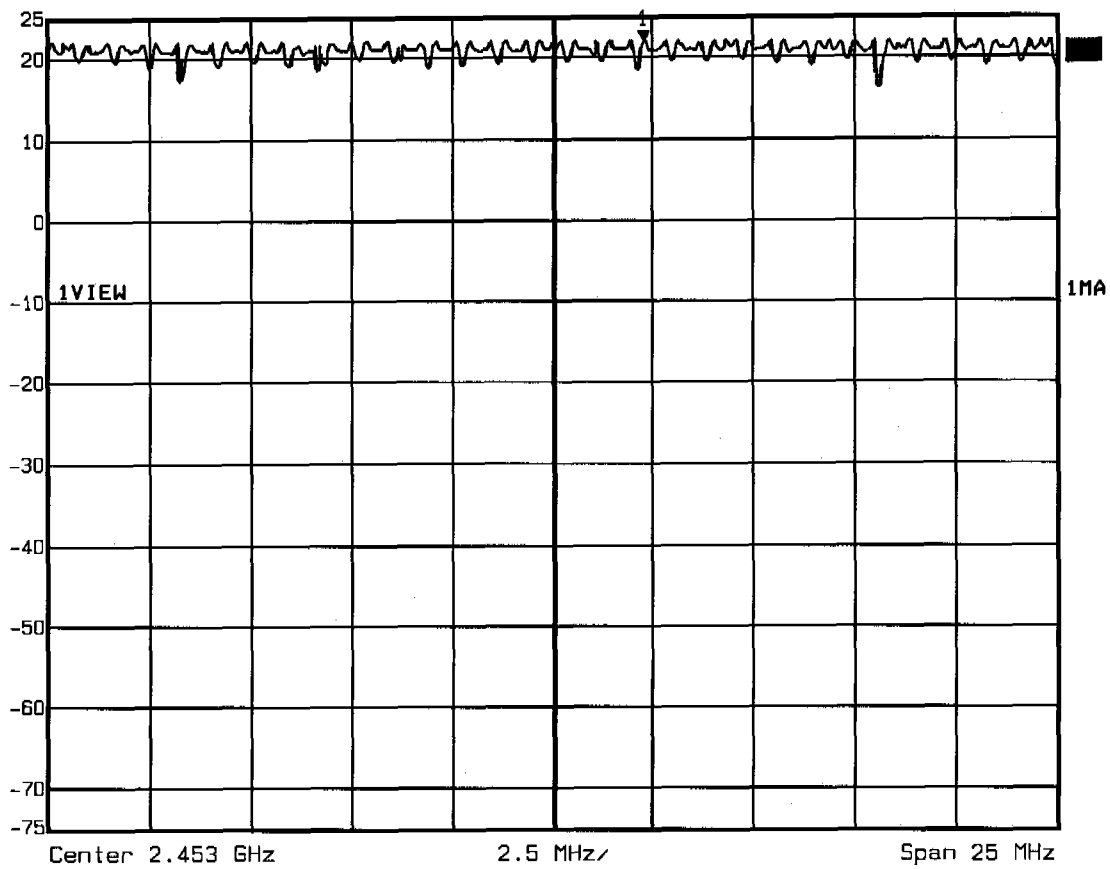

Title: Number of Hopping Frequencies Ch.: 47-75
Comment A: GN Netcom Cordless Headset 264 FCC Base
Date: 22.MAR.2005 13:17:43



Marker 1 [T1] RBW 300 kHz RF Att 50 dB
Ref Lvl 21.83 dBm VBW 300 kHz
25 dBm 2.46560020 GHz SWT 5 ms Unit dBm

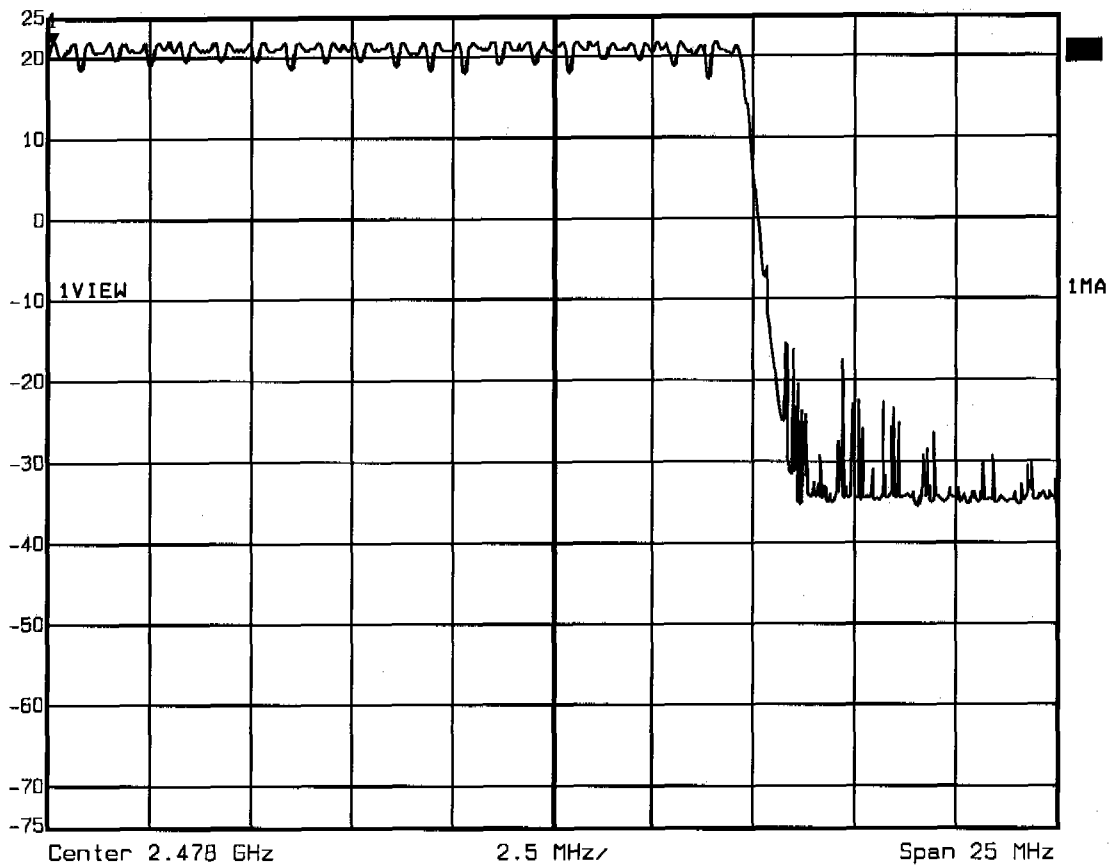

Title: Number of Hopping Frequencies Ch.: 76-94
Comment A: GN Netcom Cordless Headset 264 FCC Base
Date: 22.MAR.2005 13:24:25




Appendix G

Time of Occupancy (Dwell Time)




Delta 1 [T1] RBW 1 MHz RF Att 60 dB
Ref Lvl -0.71 dB VBW 1 MHz
30 dBm 801.603206 μ s SWT 2 ms Unit dBm

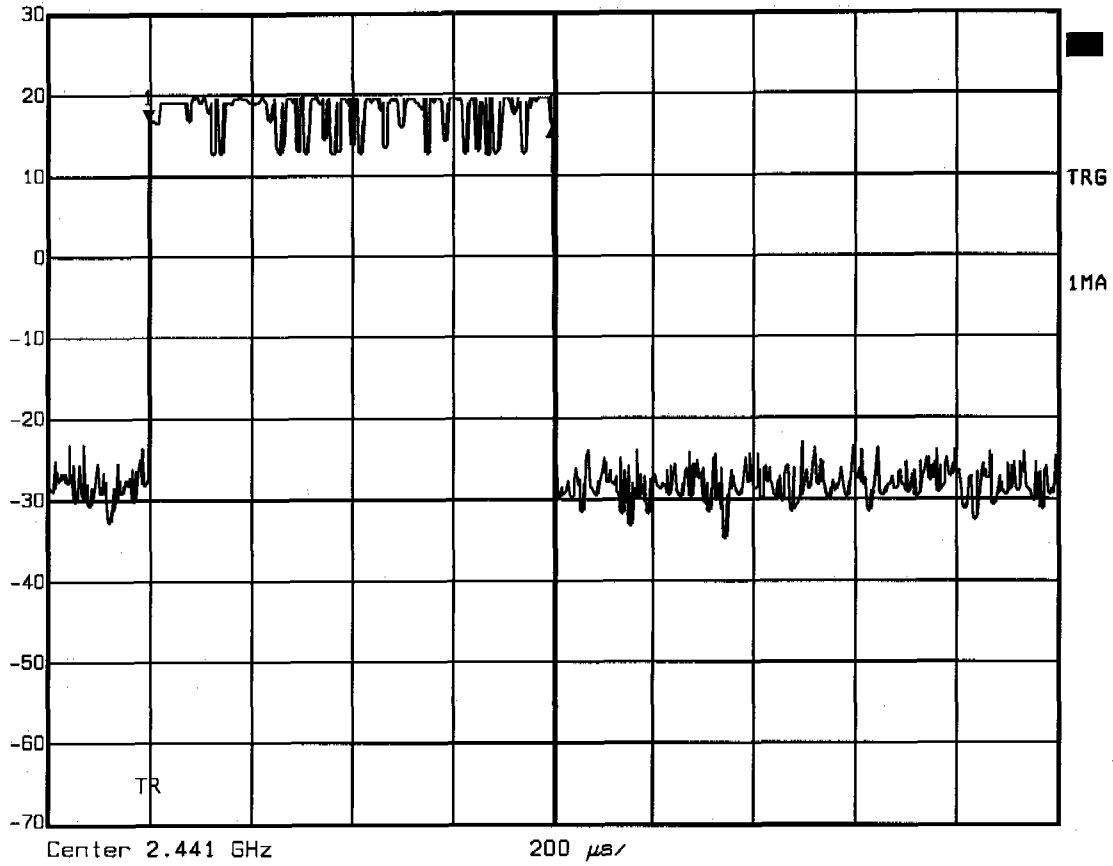

Title: Time of occupancy 40 events*0.801ms=32.04ms
Comment A: GN Netcom Cordless Headset 264 FCC Base
Date: 23.MAR.2005 08:42:02



Delta 1 [T1] RBW 1 MHz RF Att 60 dB
Ref Lvl 30 dBm 1.51 dB VBW 1 MHz
815.631263 μ s SWT 11 ms Unit dBm

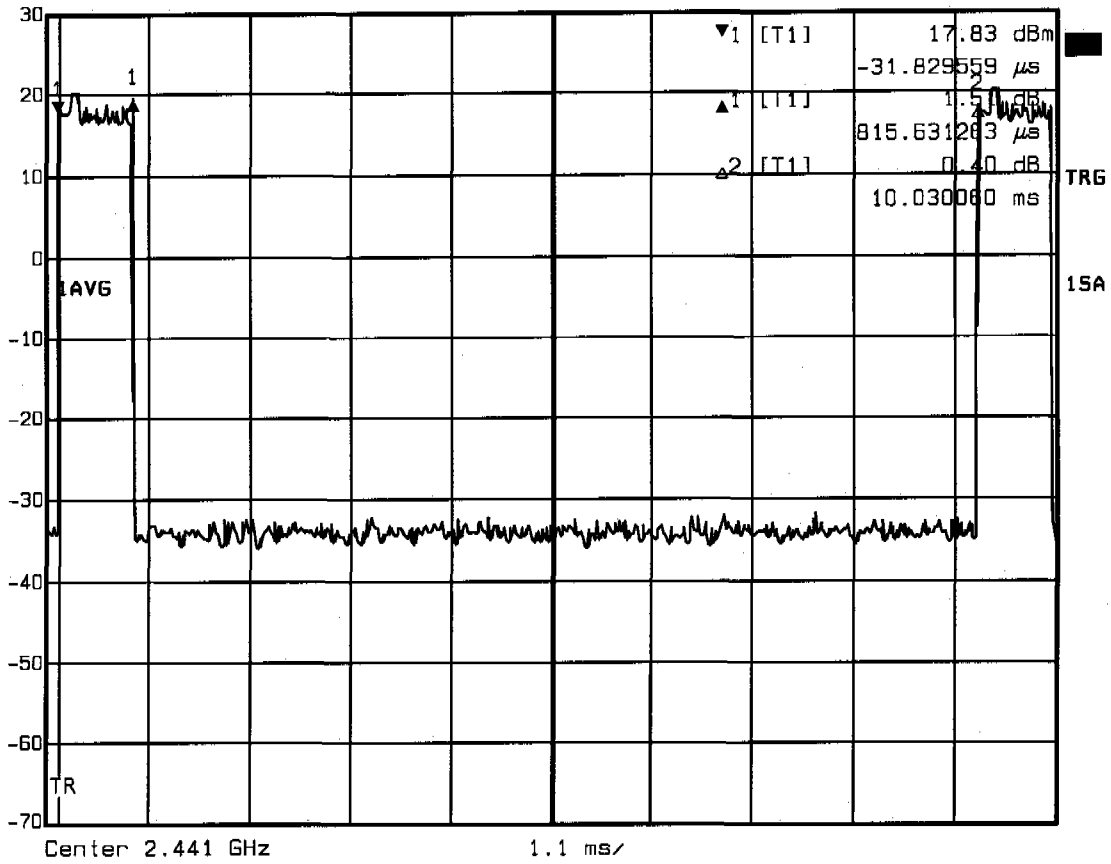

Title: Duty Cycle
Comment A: GN Netcom Cordless Headset 264 FCC Base
Date: 23.MAR.2005 08:28:44




Appendix H

20dB Bandwidth




Delta 1 [T1] RBW 10 kHz RF Att 50 dB
Ref Lvl -0.61 dB VBW 10 kHz
25 dBm 731.86372746 kHz SWT 56 ms Unit dBm

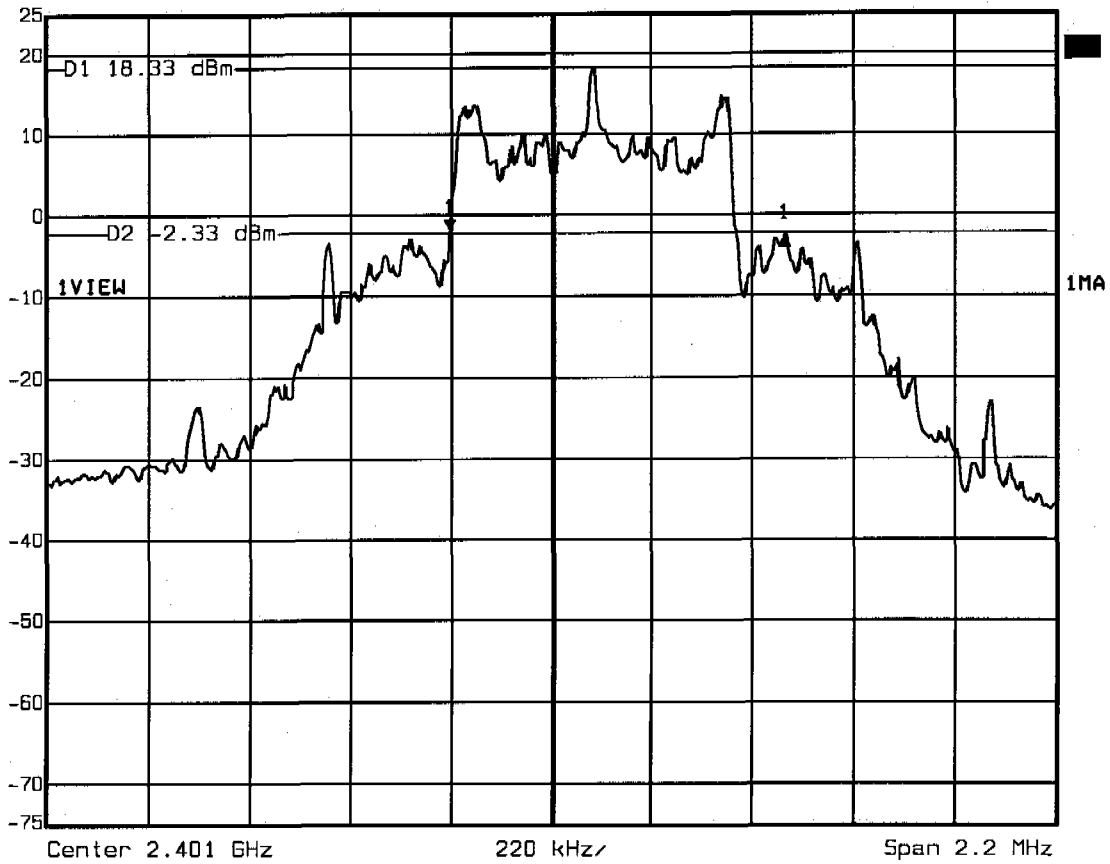

Title: -20 dB Bandwidth Ch.: 0
Comment A: GN Netcom Cordless Headset 264 FCC Base
Date: 22.MAR.2005 13:41:58



Delta 1 [T1] RBW 10 kHz RF Att 50 dB
Ref Lvl -0.04 dB VBW 10 kHz
25 dBm 718.63727455 kHz SWT 56 ms Unit dBm

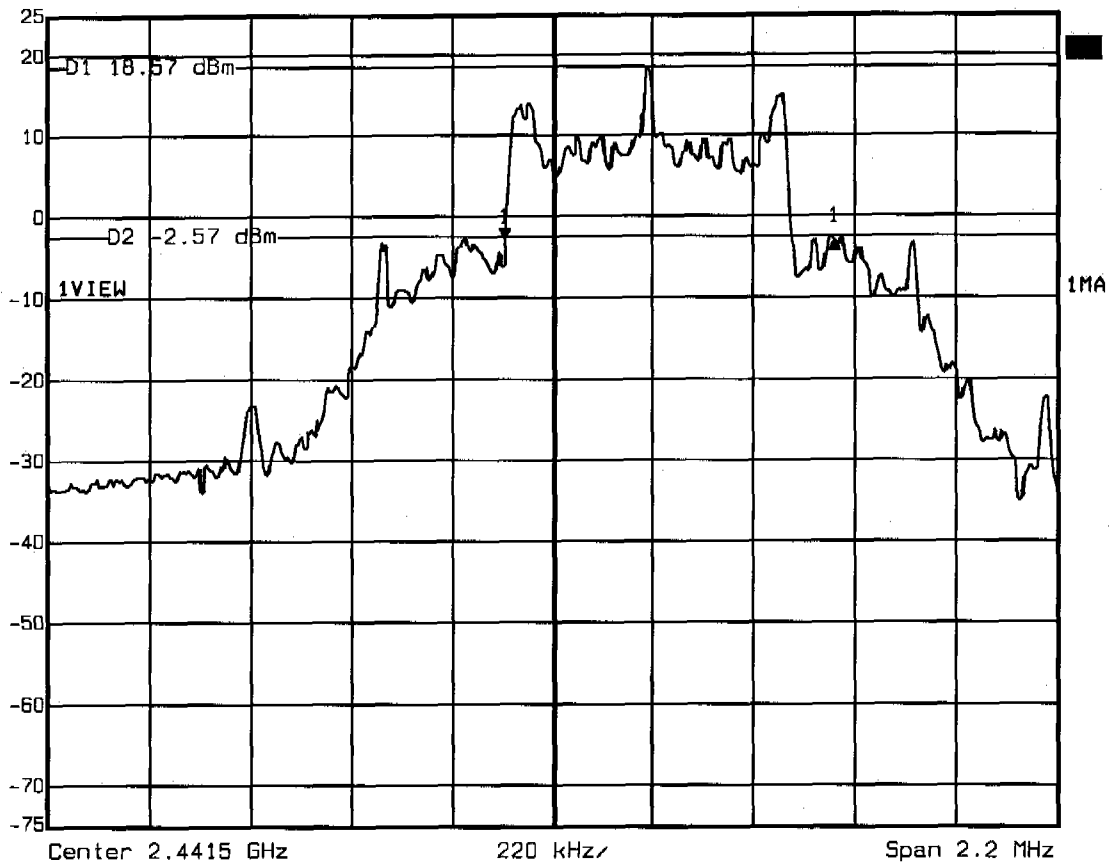

Title: -20 dB Bandwidth Ch.: 47
Comment A: GN Netcom Cordless Headset 264 FCC Base
Date: 22.MAR.2005 13:45:13



Delta 1 [T1]


RBW 10 kHz RF Att 50 dB

Ref Lvl
25 dBm

-1.19 dB
736.27254509 kHz

VBW 10 kHz
SWT 56 ms

Unit dBm

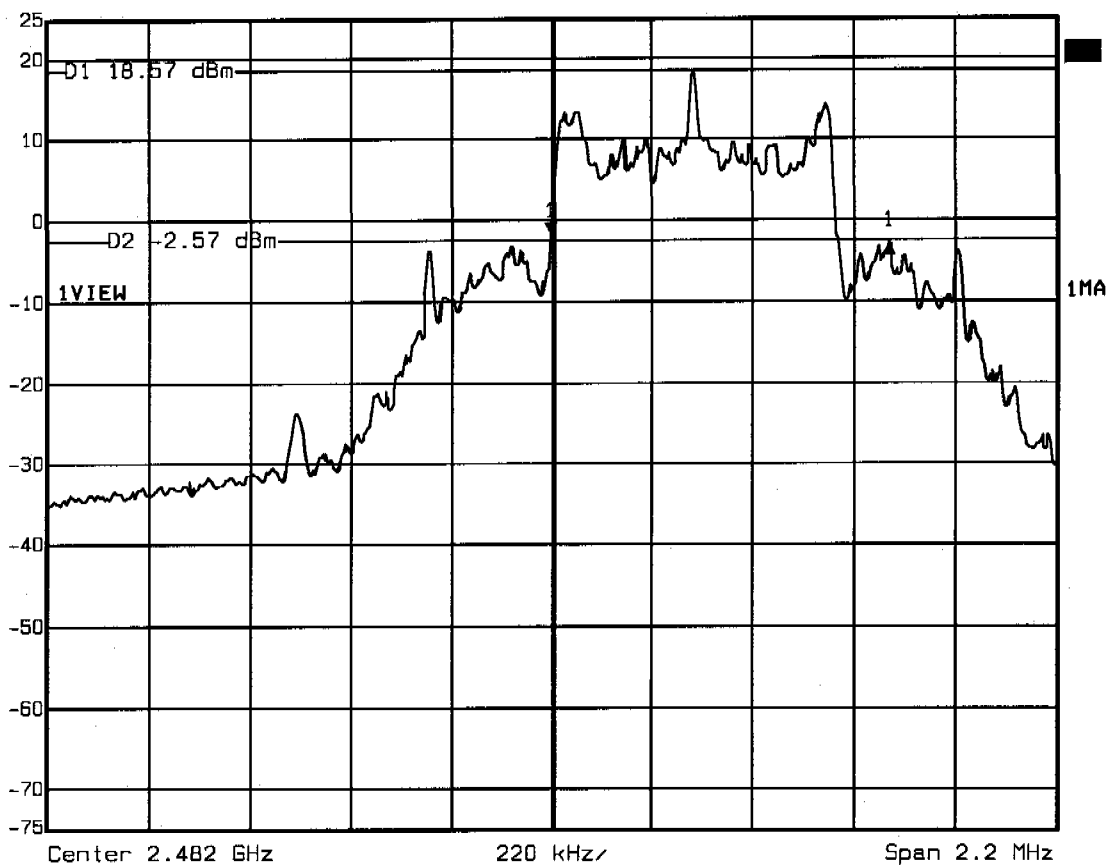

Title: -20 dB Bandwidth Ch.: 94
Comment A: GN Netcom Cordless Headset 264 FCC Base
Date: 22.MAR.2005 13:47:55




Appendix I

Band-edge Compliance of RF Emissions




Delta 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl -39.40 dB VBW 50 kHz
25 dBm -851.70340681 kHz SWT 5 ms Unit dBm

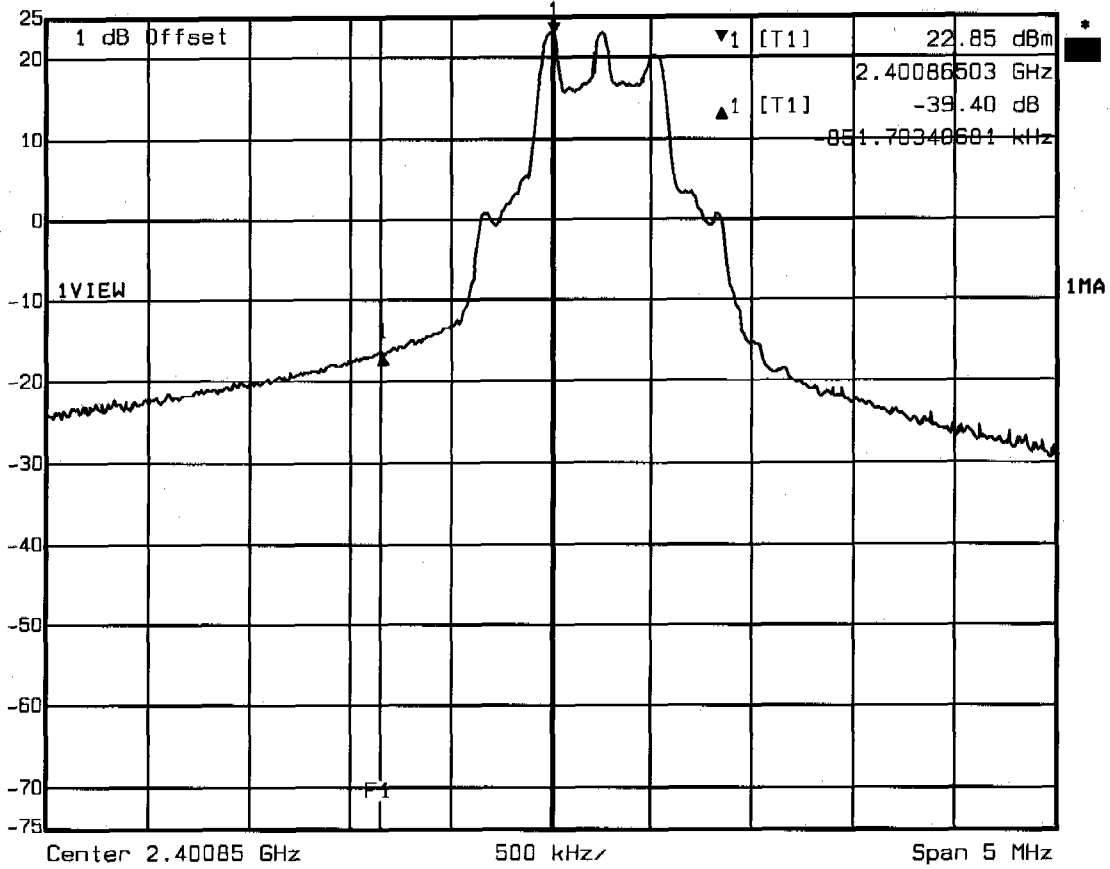

Title: Band-edge Compliance (conducted, single frequency)
Comment A: GN Netcom Cordless Headset 2G4 FCC Base
Date: 22.MAR.2005 13:51:31




Delta 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl -45.17 dB VBW 50 kHz
25 dBm 1.41282565 MHz SWT 5 ms Unit dBm

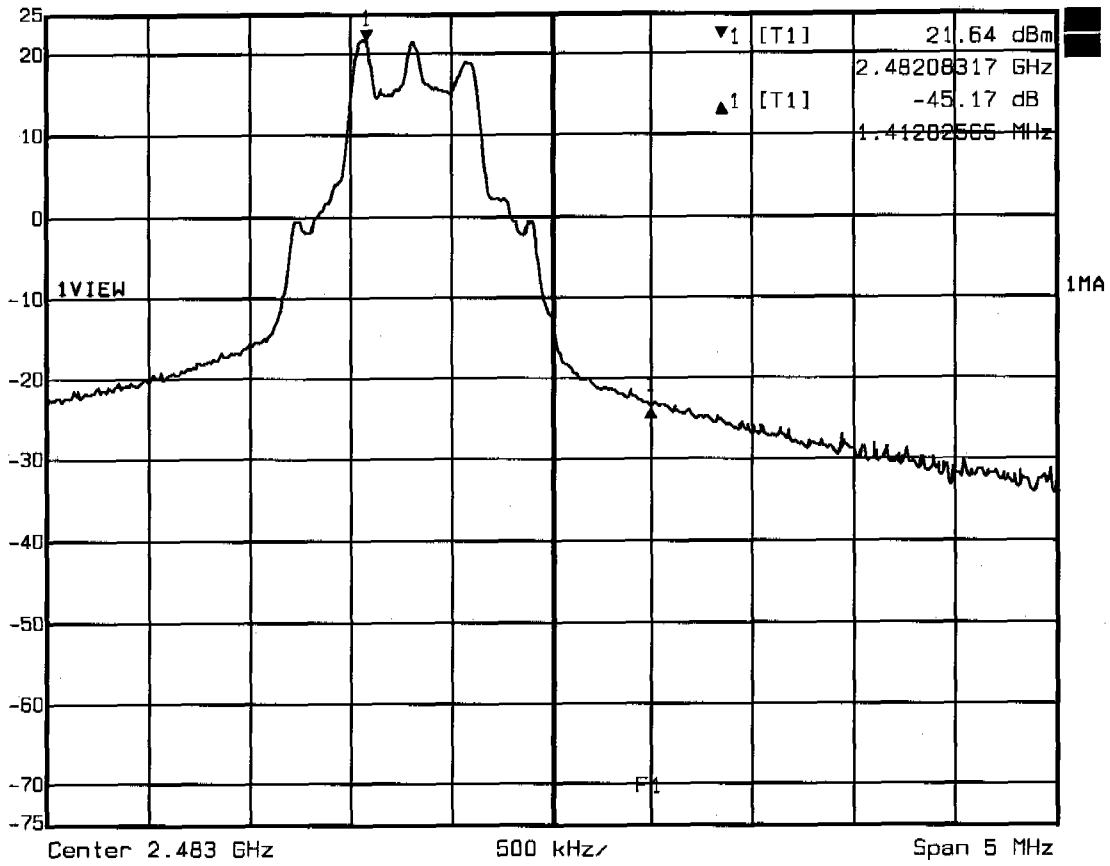

Title: Band-edge Compliance (conducted, single frequency)
Comment A: GN Netcom Cordless Headset 264 FCC Base
Date: 22.MAR.2005 13:55:58




Delta 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl -39.12 dB VBW 50 kHz
25 dBm -1.08216433 MHz SWT 5 ms Unit dBm

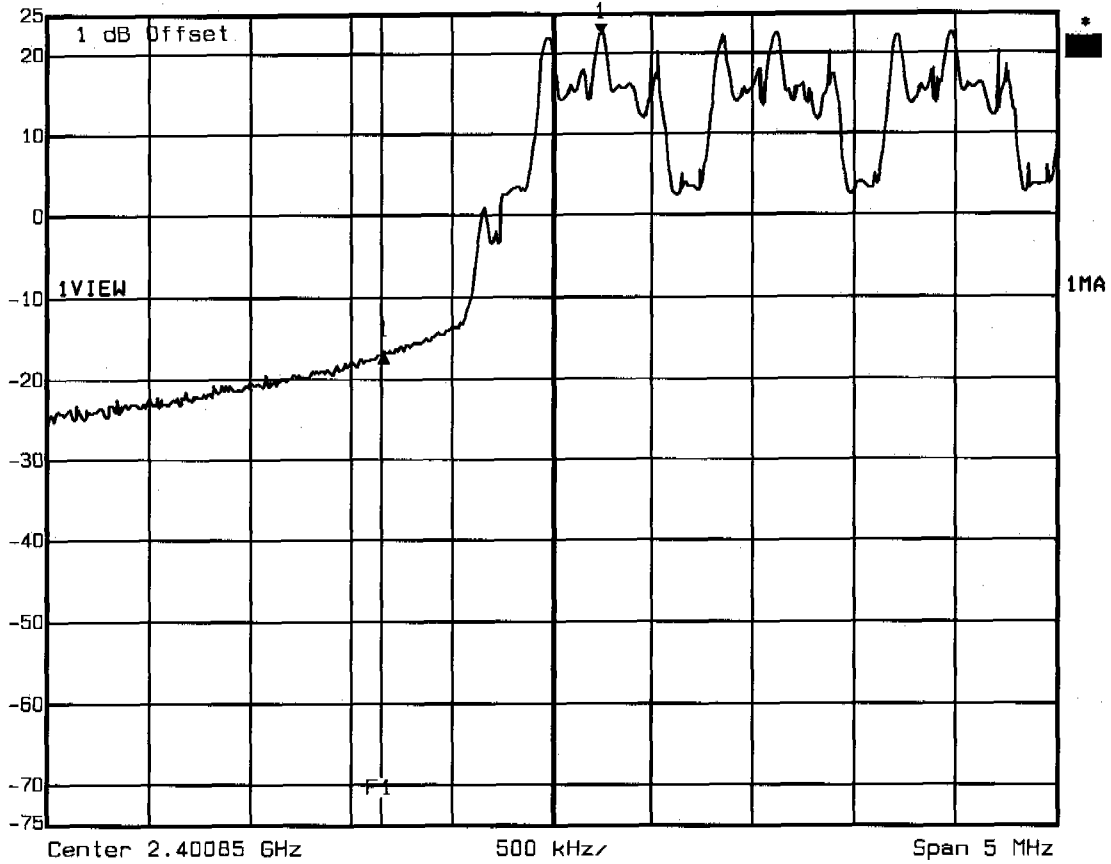

Title: Band-edge Compliance (conducted, hopping frequency)
Comment A: GN Netcom Cordless Headset 264 FCC Base
Date: 22.MAR.2005 11:43:17



Delta 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl -44.33 dB VBW 50 kHz
25 dBm 1.19238477 MHz SWT 5 ms Unit dBm

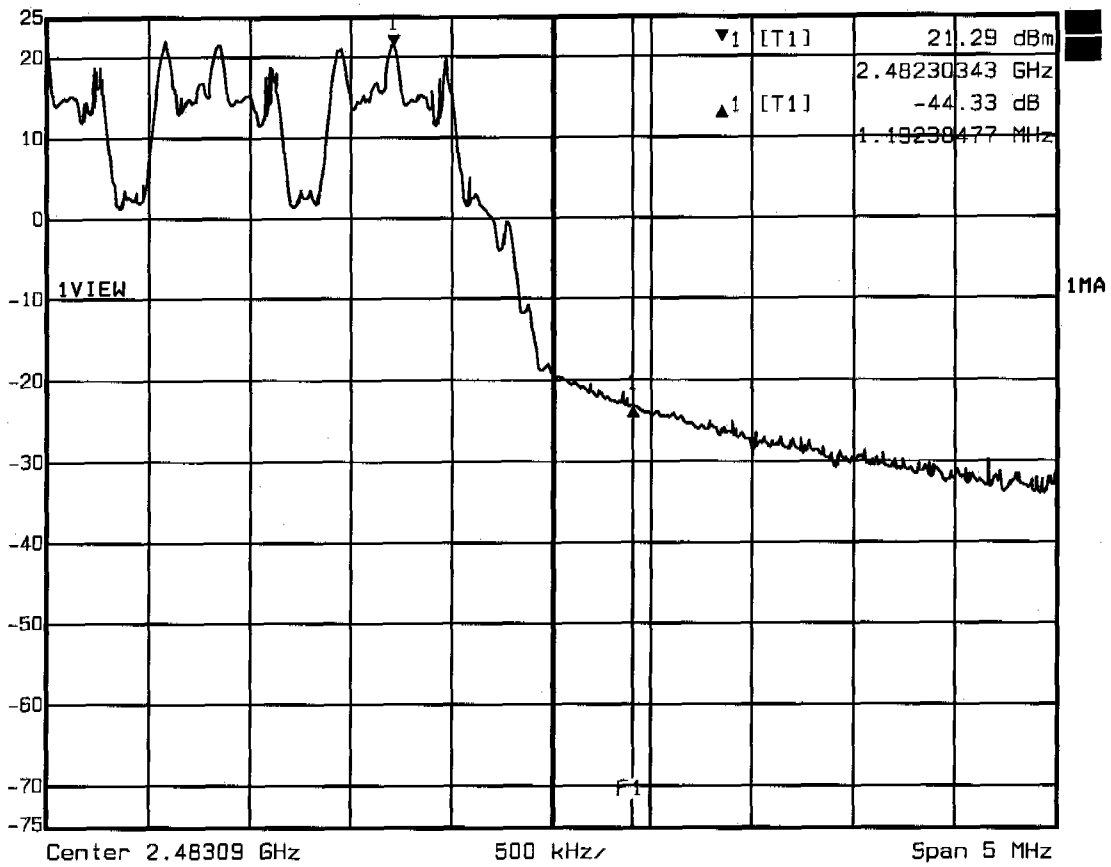

Title: Band-edge Compliance (conducted, hopping frequency)
Comment A: GN Netcom Cordless Headset 2G4 Base
Date: 22.MAR.2005 12:22:46




Appendix J

Conducted Measurement at (AC) Power Line

EMI voltage test in the ac-mains according to FCC part 15

EUT: CORDLESS HEADSET
 Manufacturer: GN NETCOM
 Operating Condition: Unom: 230 V AC (AC/DC-ADAPTOR) , Tnom: 23°C
 Test Site: ETS
 Operator: Mr. Pflug
 Test Specification: V-Network: ESH2-Z5 (L1)
 Comment: model: GN ELLIPSE mode: Link + Charging

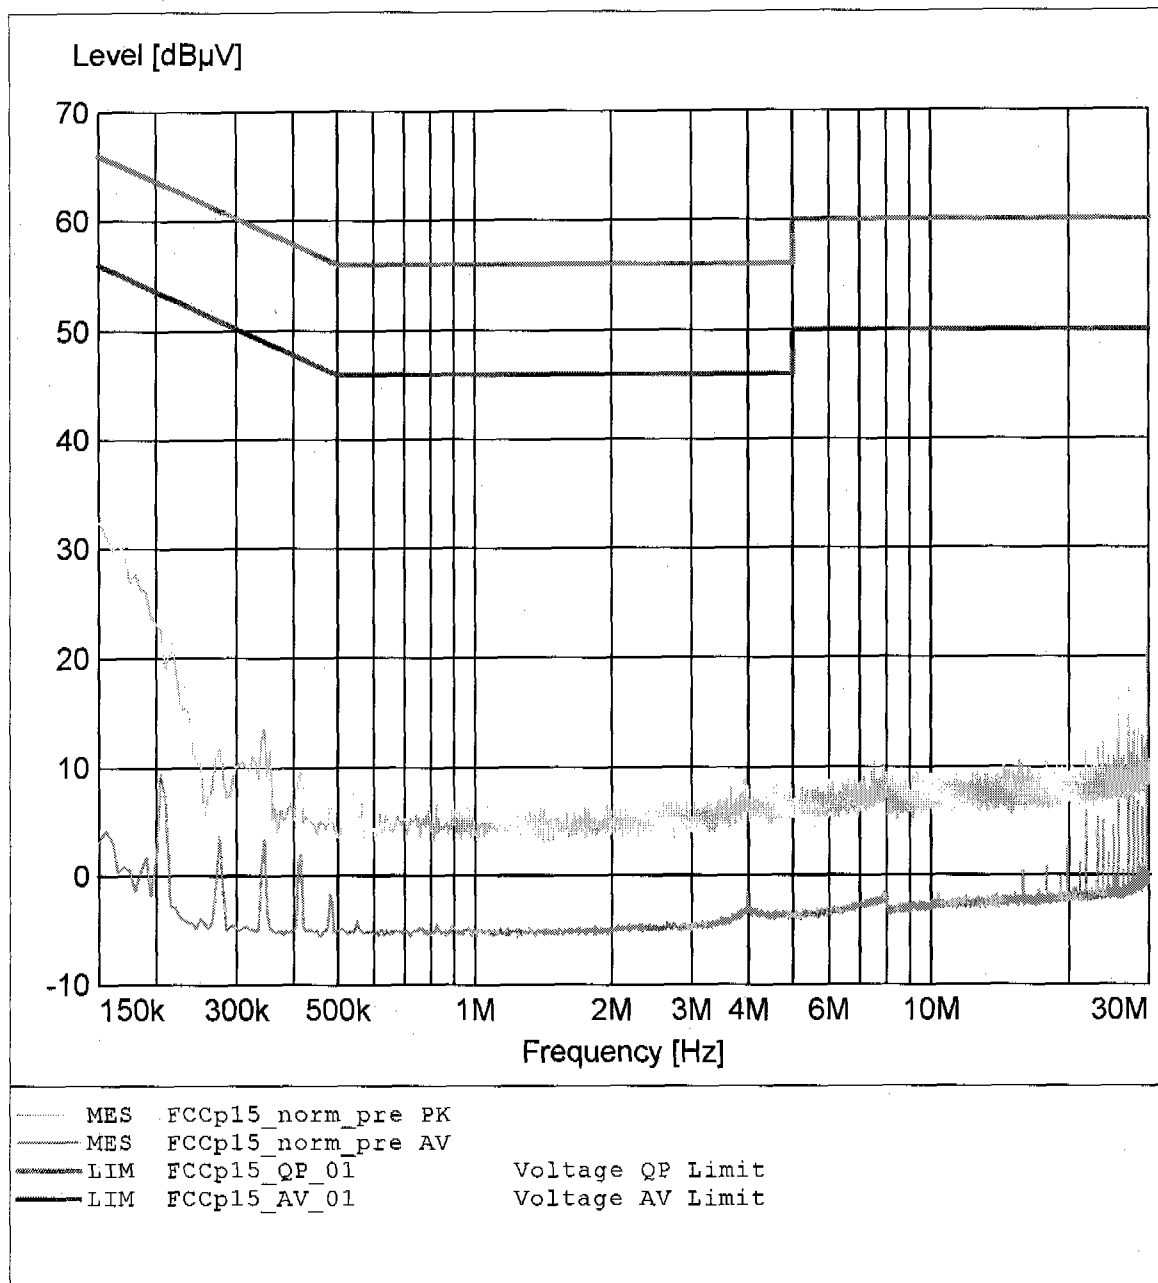

EMI voltage test in the ac-mains according to FCC part 15

EUT: CORDLESS HEADSET
Manufacturer: GN NETCOM
Operating Condition: Unom: 230 V AC (AC/DC-ADAPTOR) , Tnom: 23°C
Test Site: ETS
Operator: Mr. Pflug
Test Specification: V-Network: ESH2-Z5 (N)
Comment: model: GN ELLIPSE mode: Link + Charging

