



Appendix B

Peak Output Power



Marker 1 [T1] RBW 1 MHz RF Att 50 dB
Ref Lvl 25 dBm 22.46 dBm VBW 1 MHz
2.40103908 GHz SWT 5 ms Unit dBm



Title: Peak Output Power conducted Ch.: 0
Comment A: GN Netcom Cordless Headset 264 FCC Beltpack Ch.: 0
Date: 22.MAR.2005 09:26:05




Marker 1 [T1] RBW 1 MHz RF Att 50 dB
Ref Lvl 25 dBm 22.25 dBm VBW 1 MHz
25 dBm 2.44159619 GHz SWT 5 ms Unit dBm



Title: Peak Output Power conducted Ch.: 47
Comment A: GN Netcom Cordless Headset 264 FCC Beltpack
Date: 22.MAR.2005 09:31:19




Marker 1 [T1] RBW 1 MHz RF Att 50 dB
Ref Lvl 21.83 dBm VBW 1 MHz
25 dBm 2.48216132 GHz SWT 5 ms Unit dBm

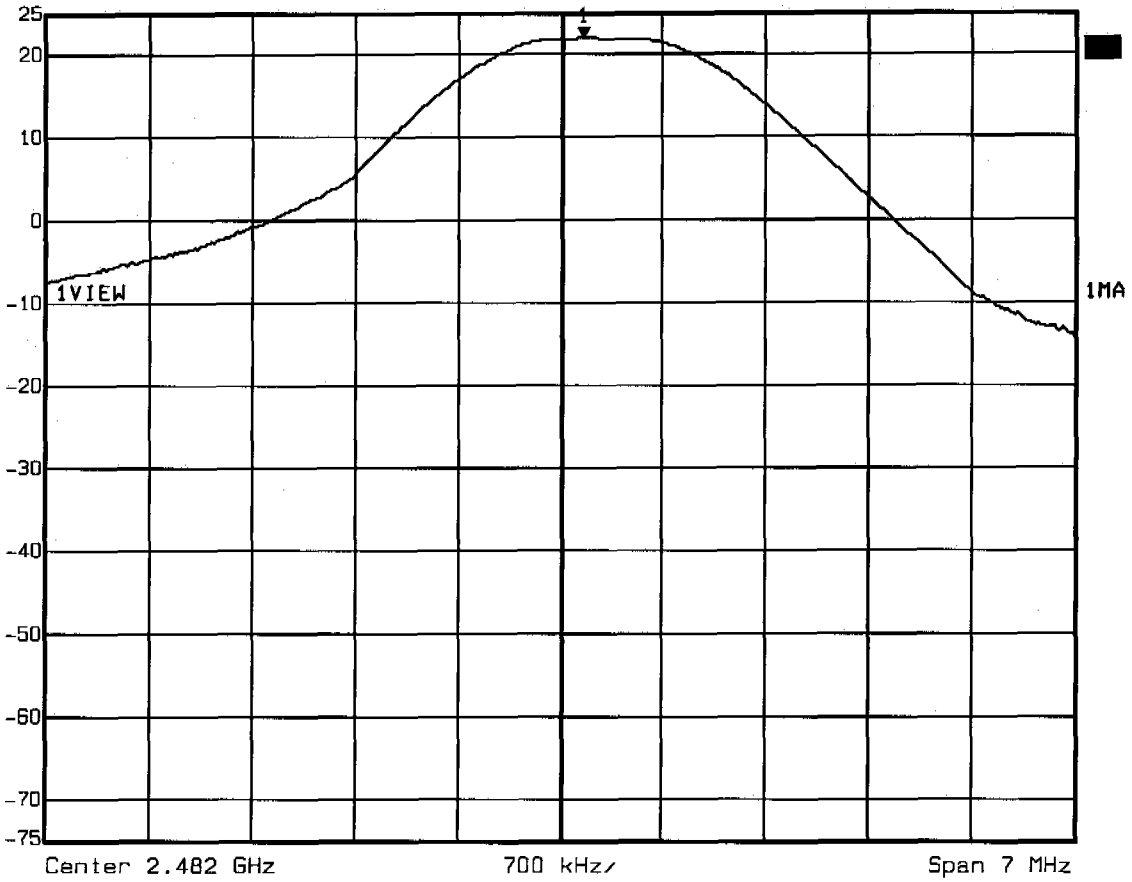

Title: Peak Output Power conducted Ch.: 94
Comment A: GN Netcom Cordless Headset 264 FCC Beltpack
Date: 22.MAR.2005 09:40:46


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 2.401GHz, Pmax: 22.10dBm, RBW: 5MHz

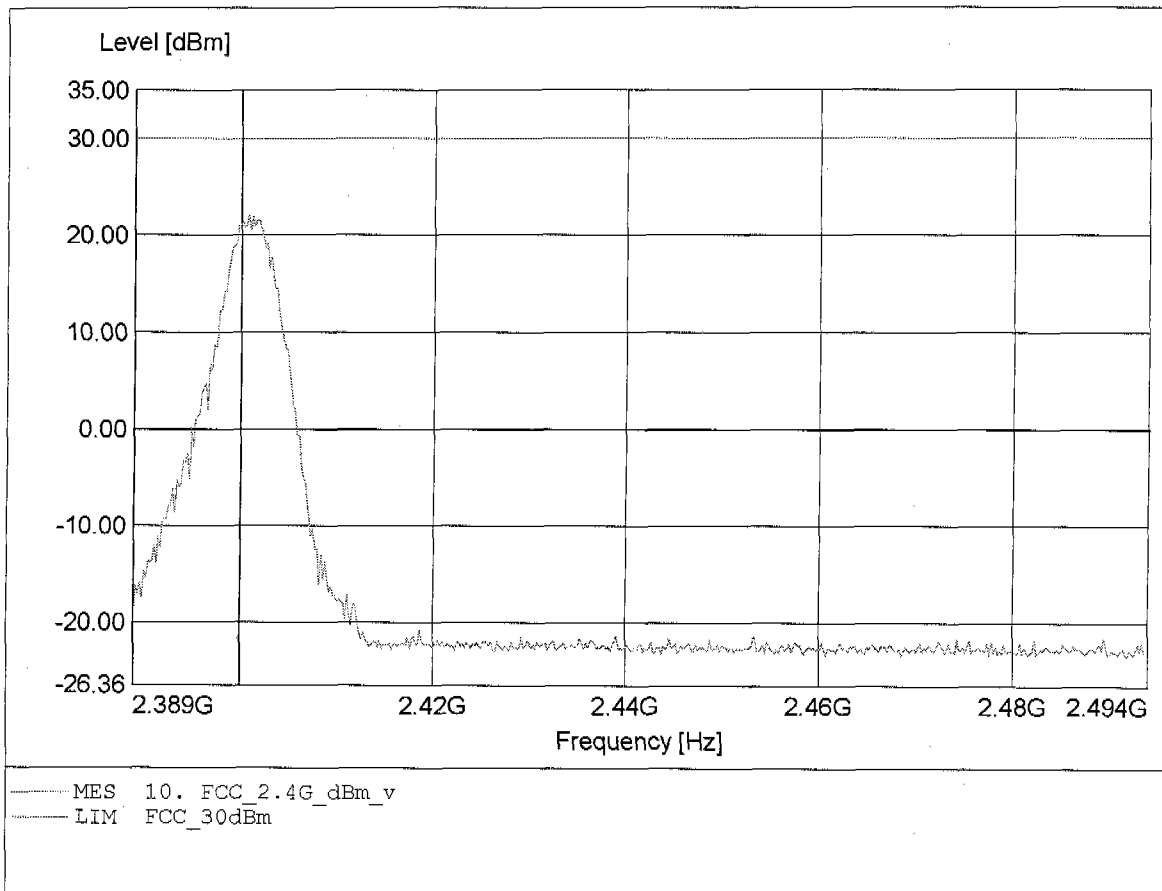


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 2.401GHz, Pmax: 26.16dBm, RBW: 5MHz

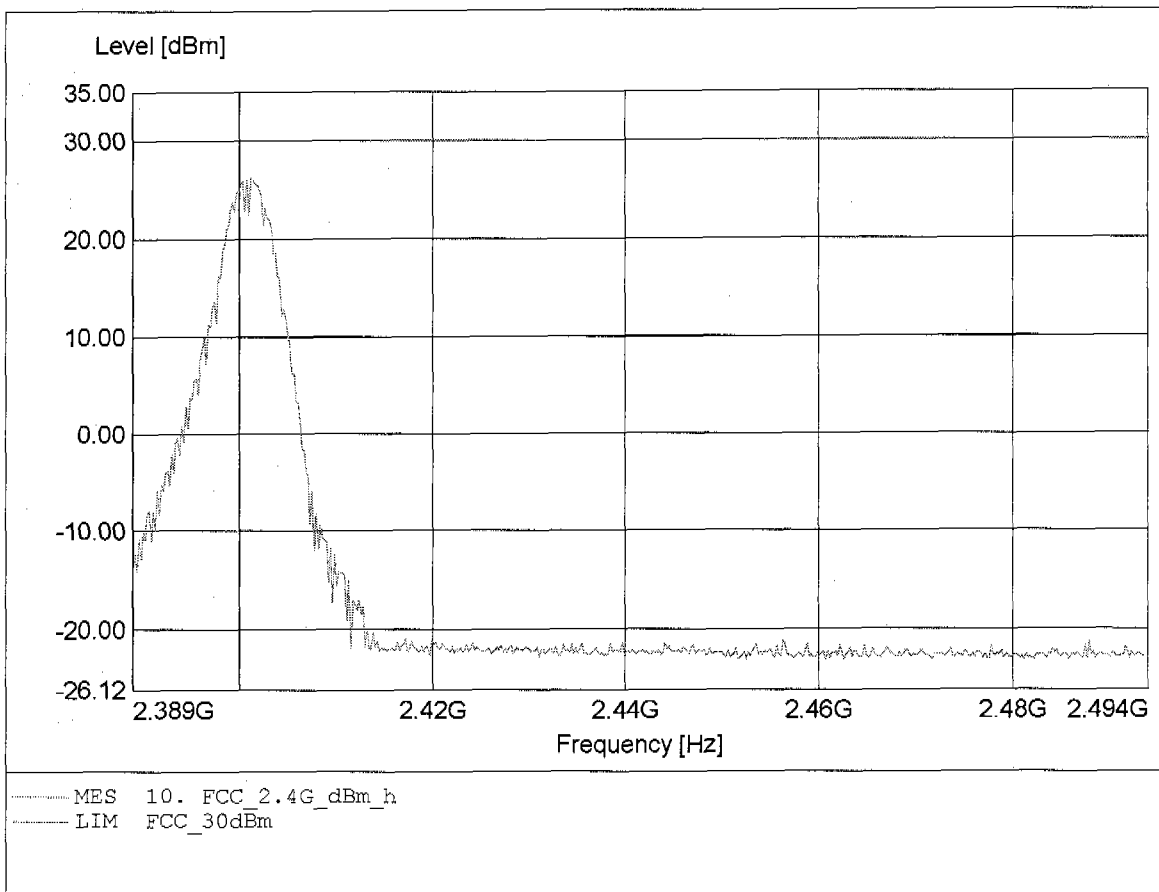


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 47
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 2.442GHz, Pmax: 23.09dBm, RBW: 5MHz

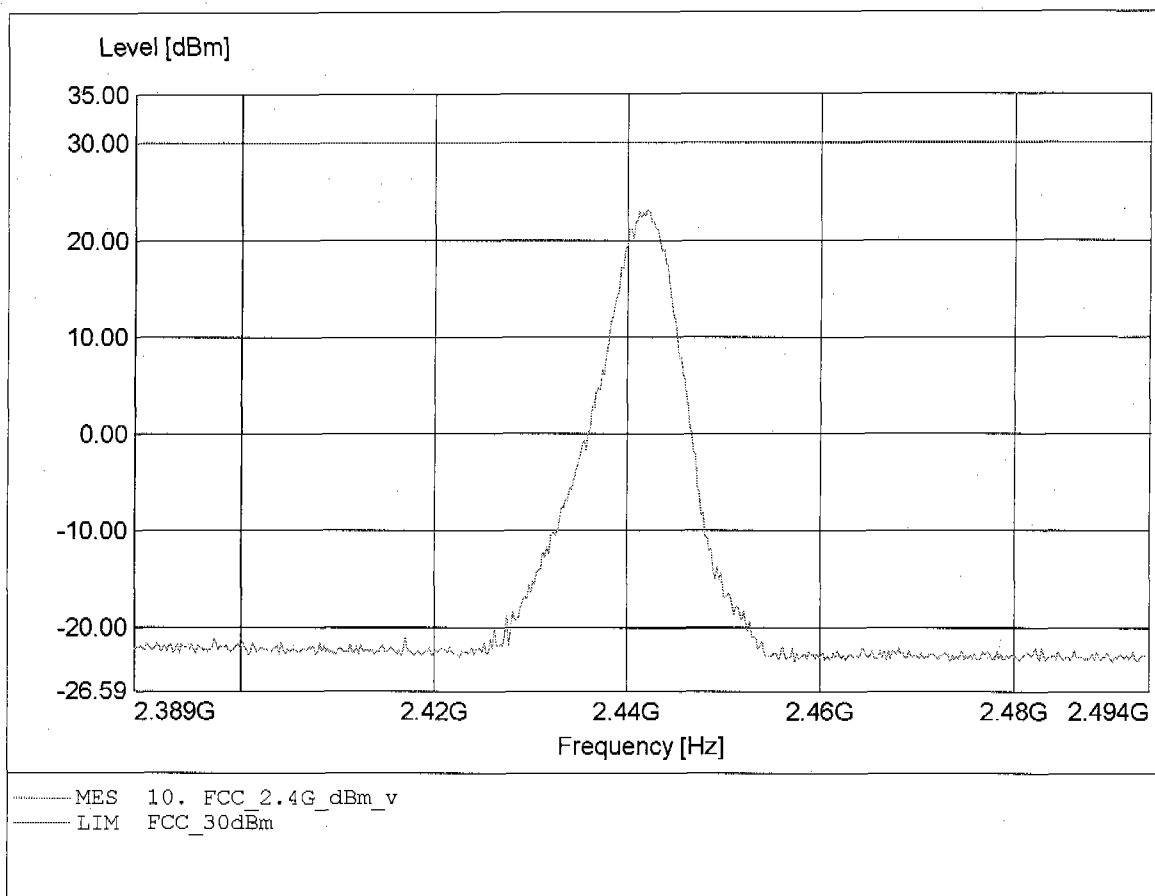


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 47
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 2.442GHz, Pmax: 24.88dBm, RBW: 5MHz

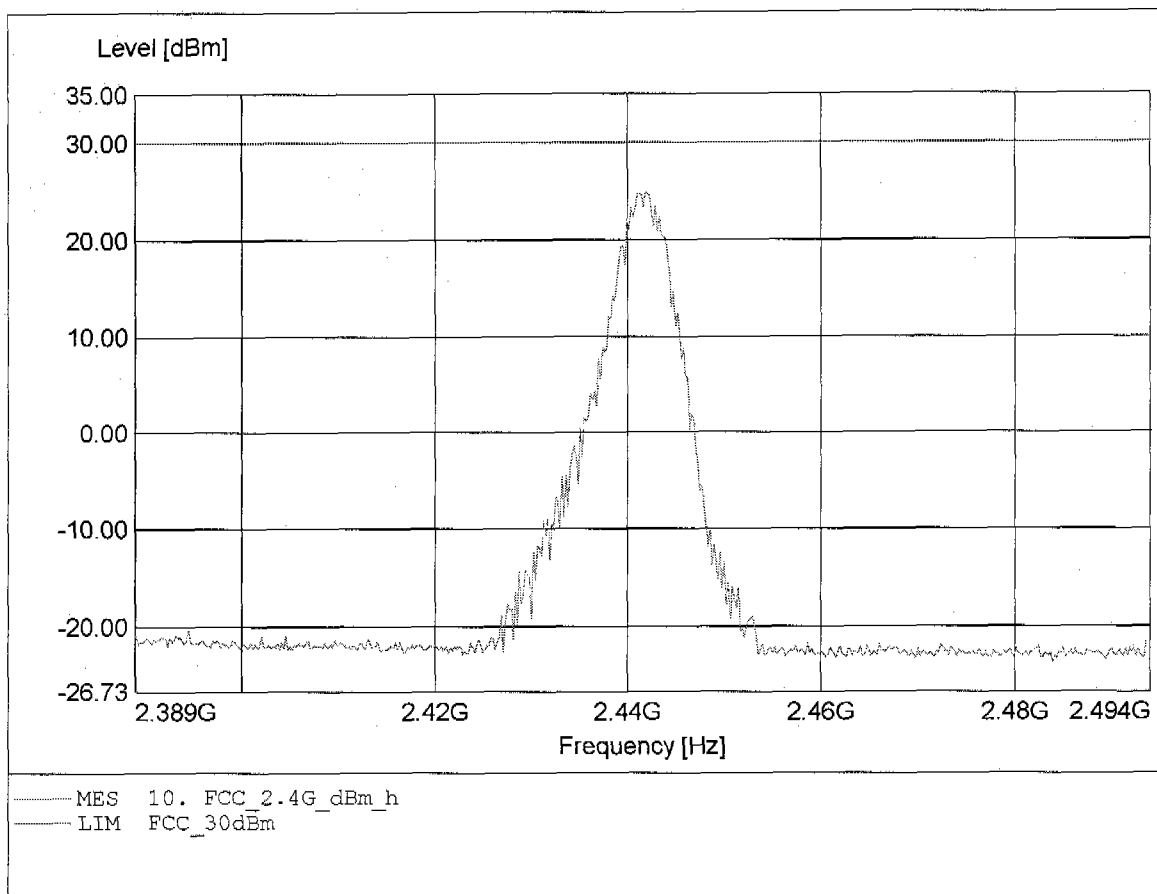


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 2.483GHz, Pmax: 23.19dBm, RBW: 5MHz

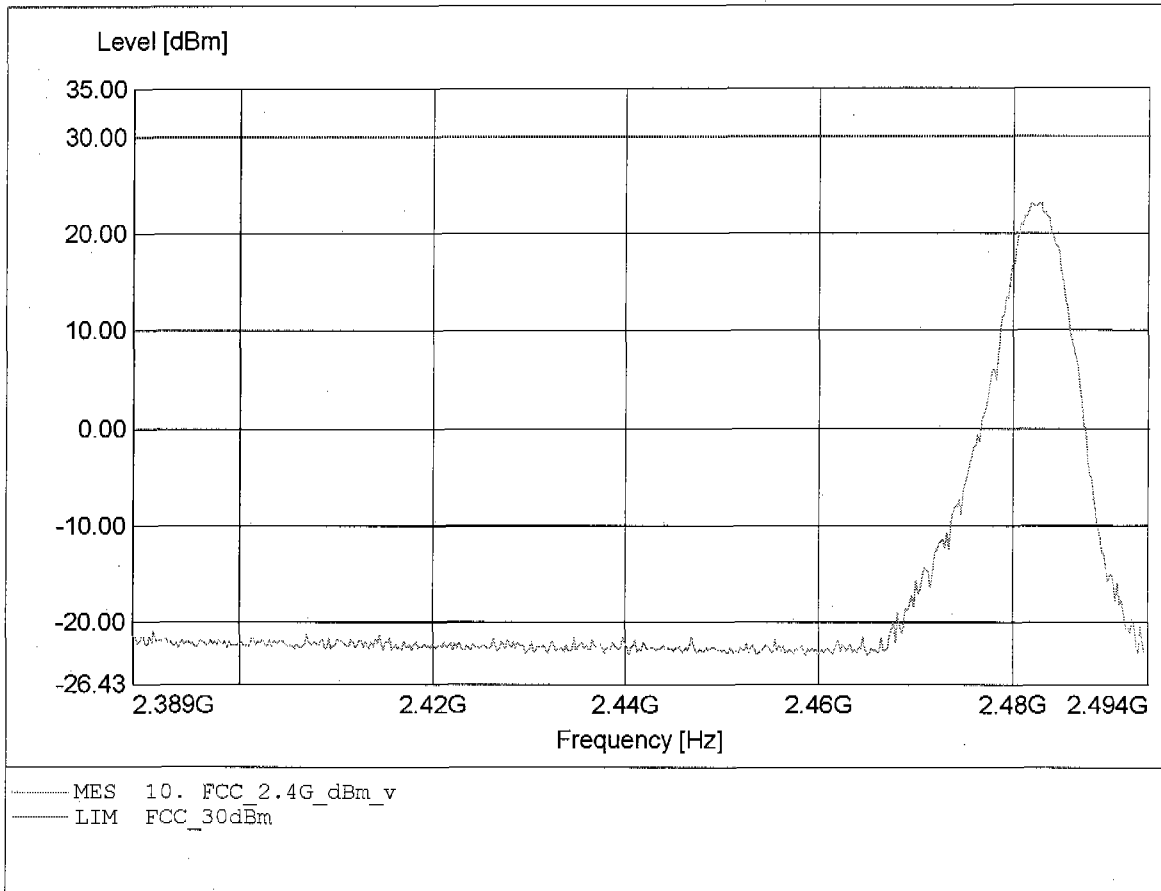


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 2.482GHz, Pmax: 23.20dBm, RBW: 5MHz

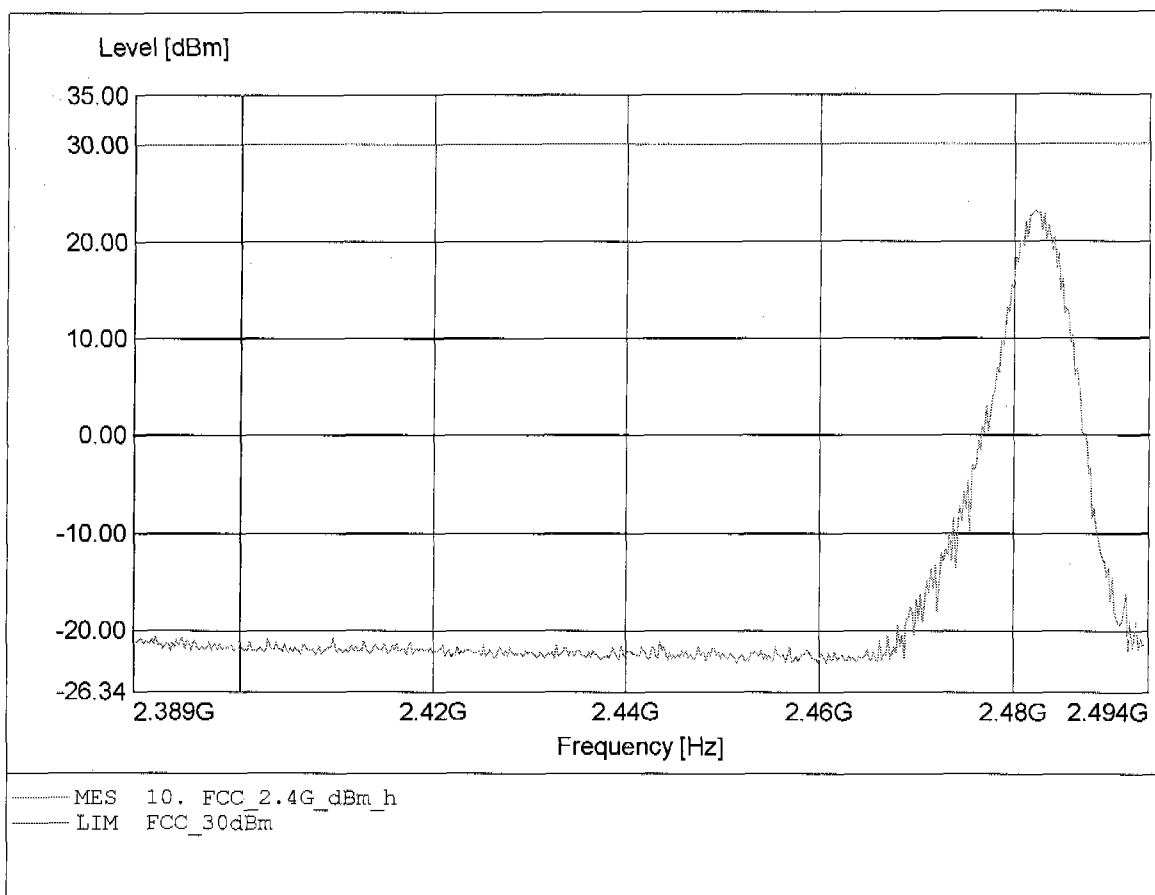


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 2.401GHz, Pmax: 21.33dBm, RBW: 5MHz

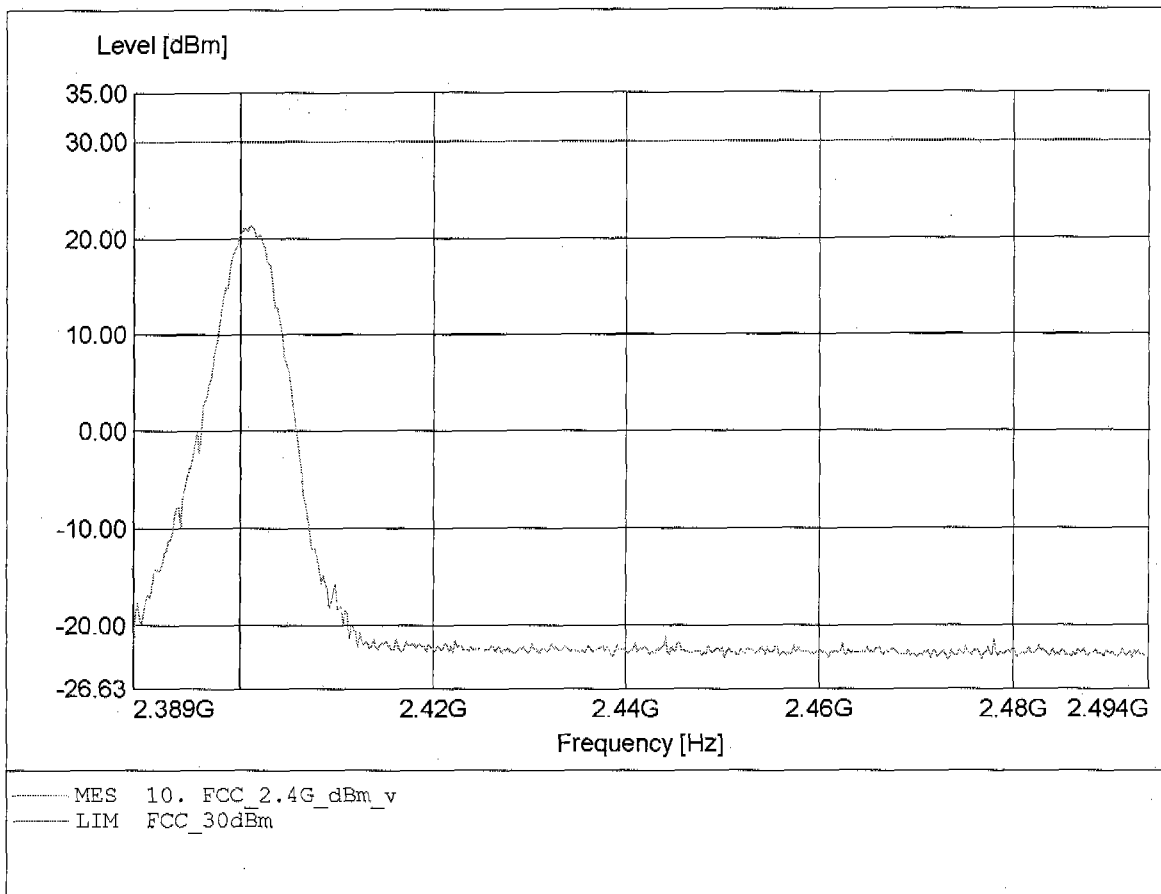


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 2.401GHz, Pmax: 22.15dBm, RBW: 5MHz

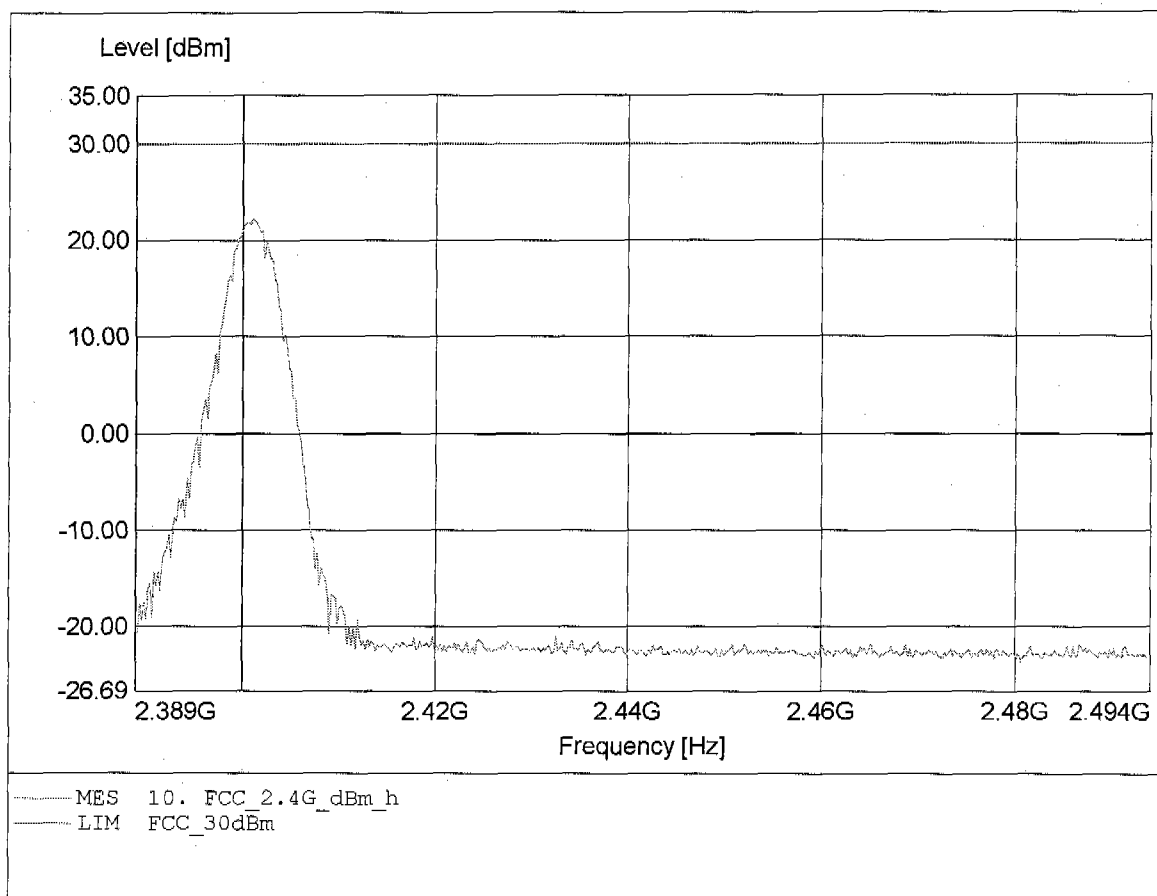


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 47
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 2.441GHz, Pmax: 19.91dBm, RBW: 5MHz

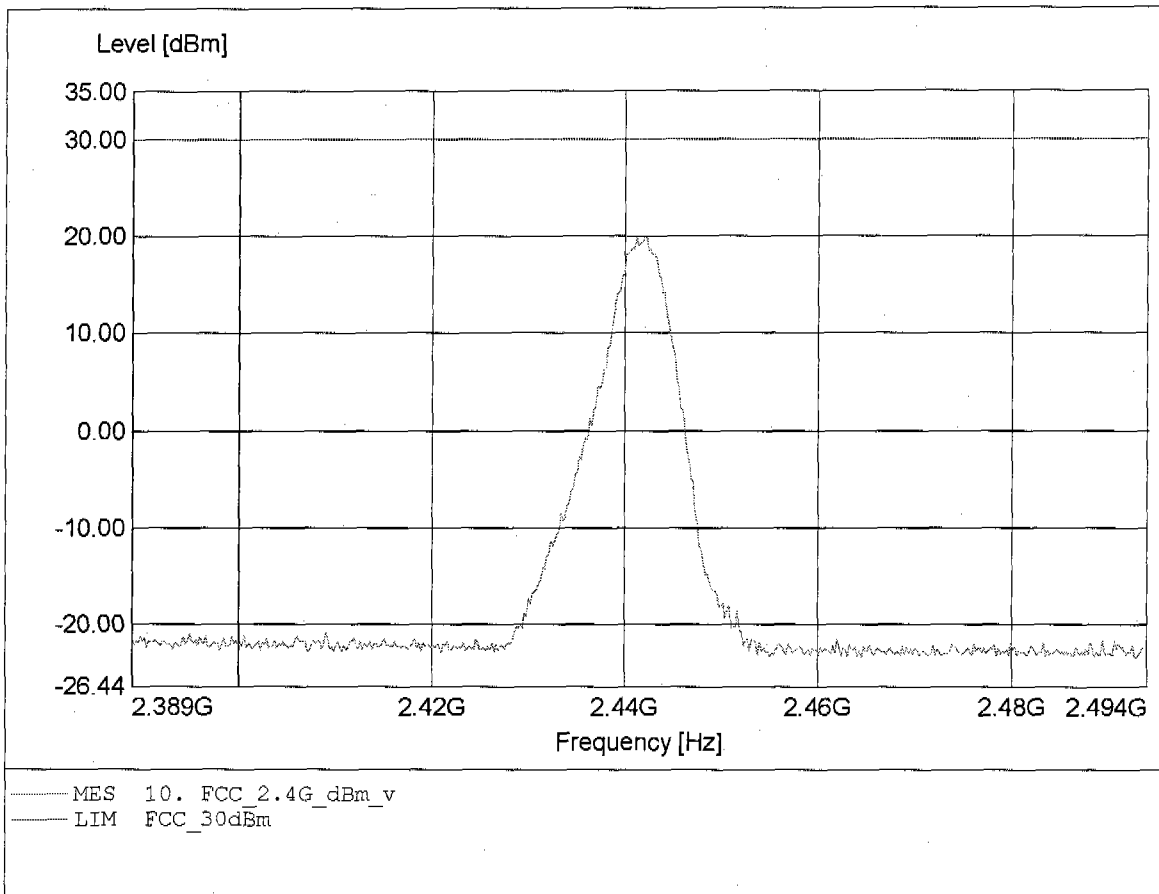


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 47
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 2.441GHz, Pmax: 18.47dBm, RBW: 5MHz

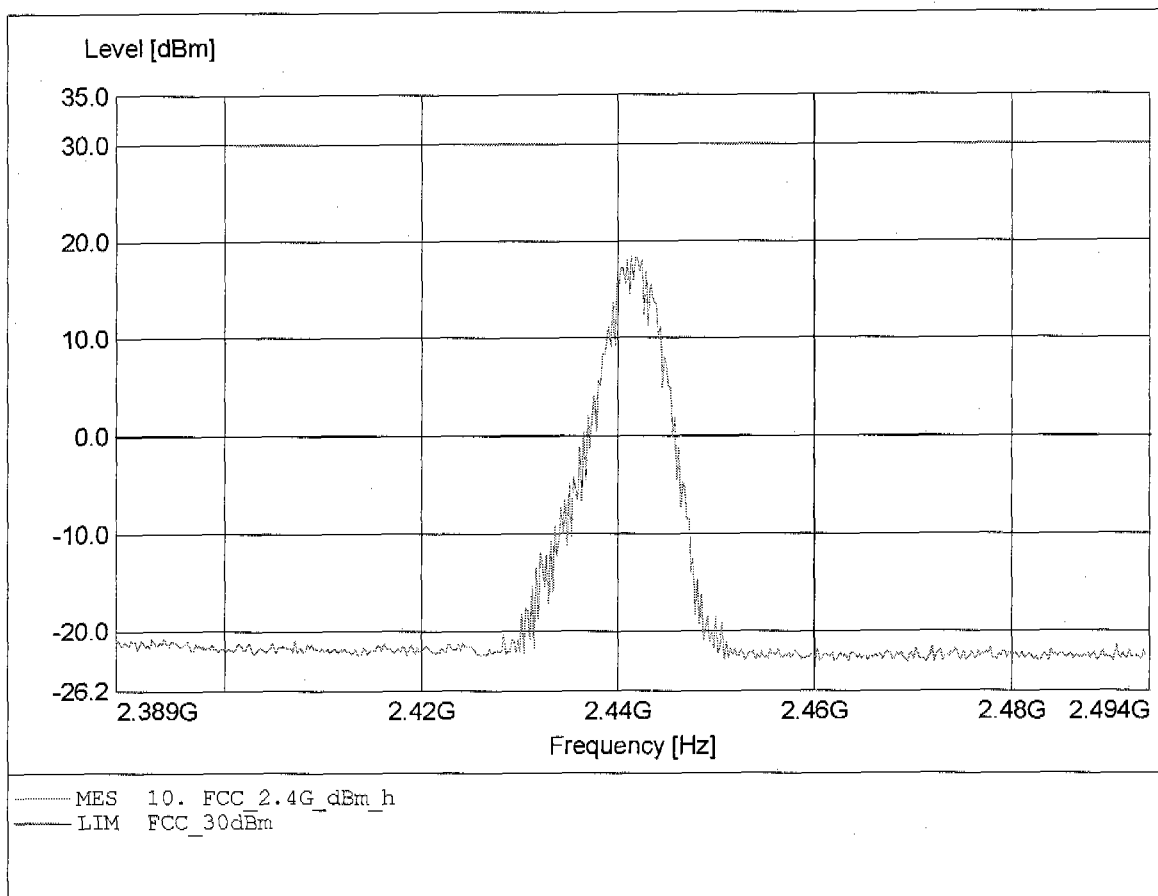


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 2.482GHz, Pmax: 18.64dBm, RBW: 5MHz

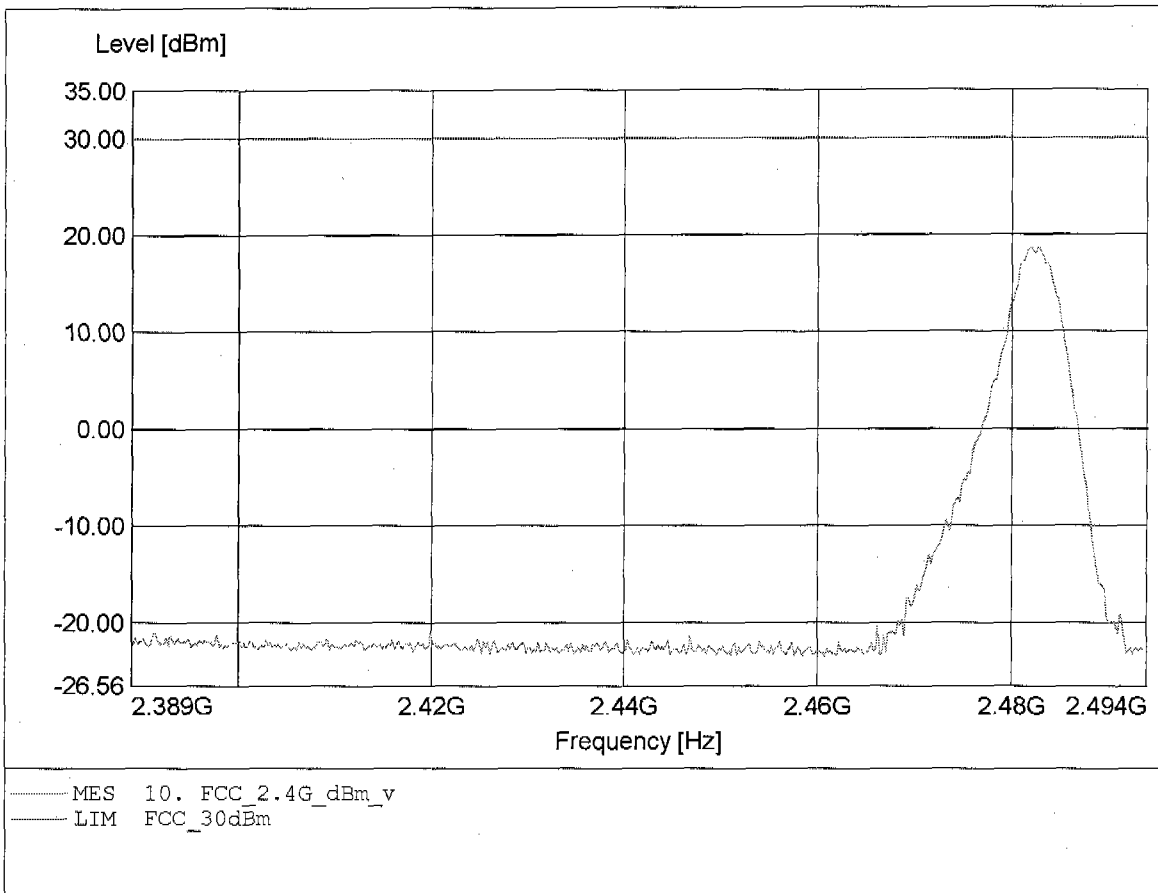

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 2.482GHz, Pmax: 13.62dBm, RBW: 5MHz

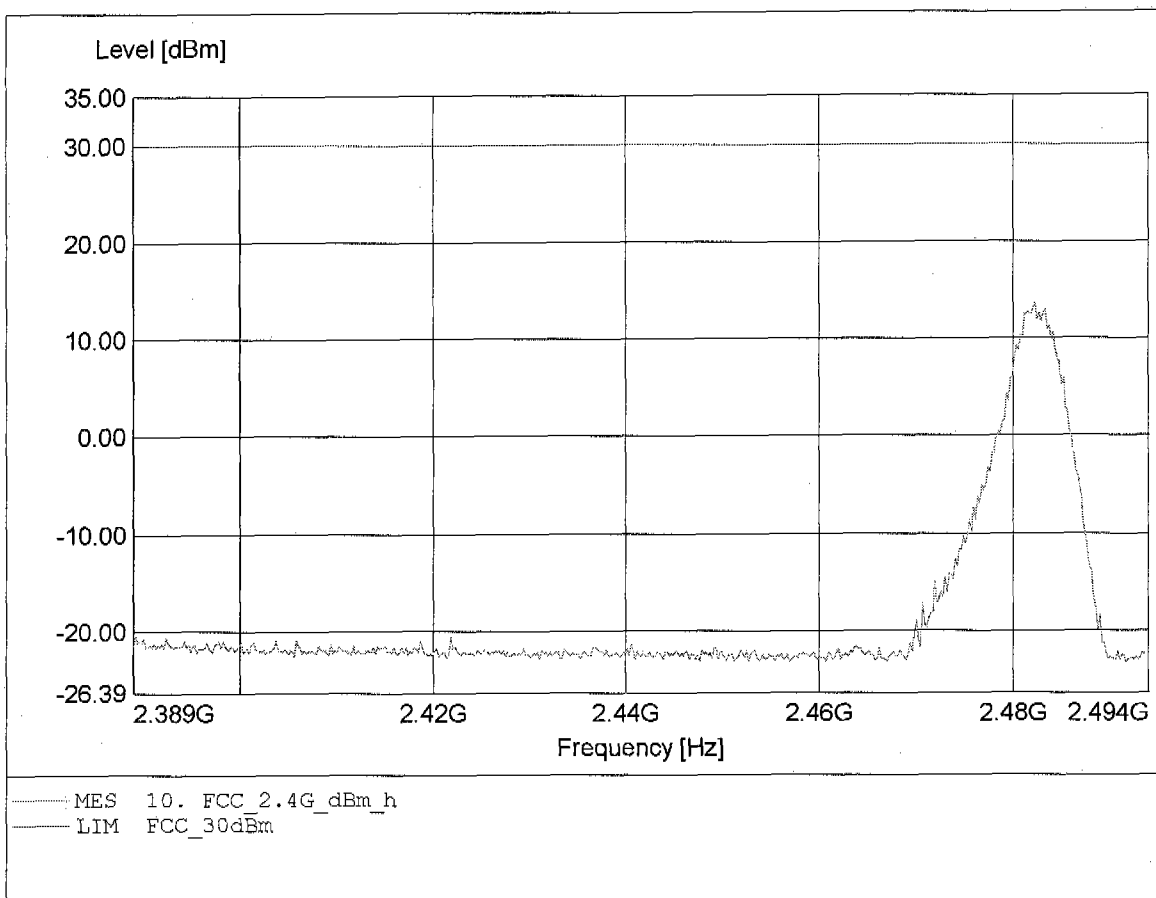




Appendix C

Spurious Emissions radiated - Transmitter operating


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 2.401GHz, Emax: 122.06dBµV/m, RBW: 100kHz

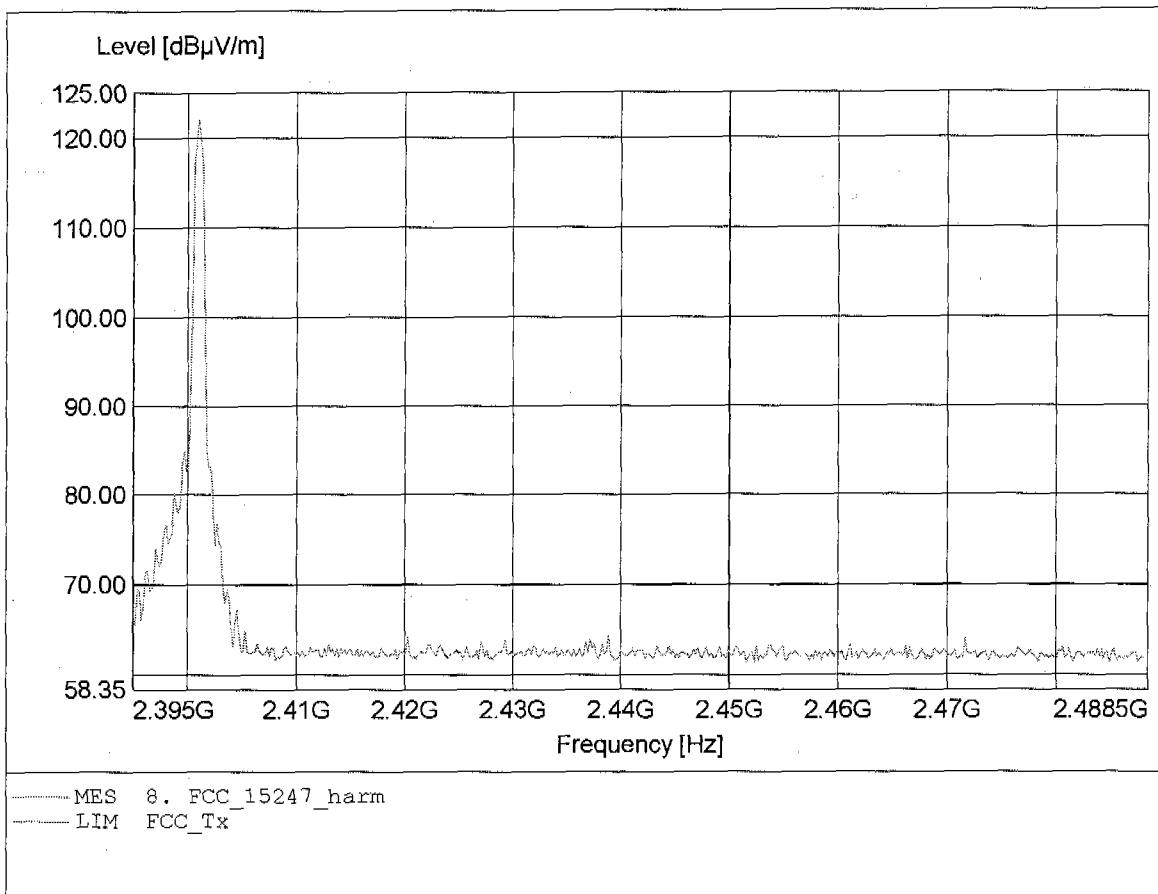


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 2.401GHz, Emax: 117.90dBµV/m, RBW: 100kHz

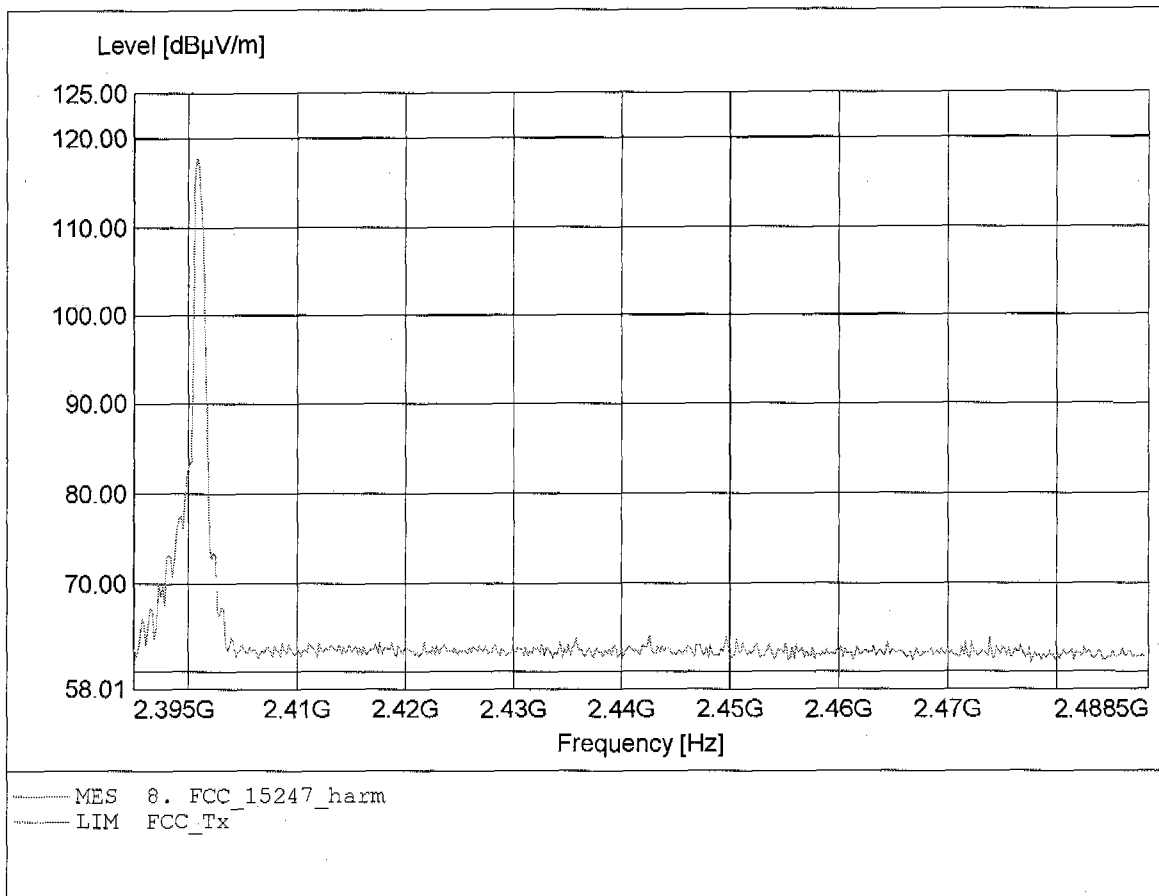


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 187.735MHz, Emax: 32.27dBµV/m, RBW: 100kHz

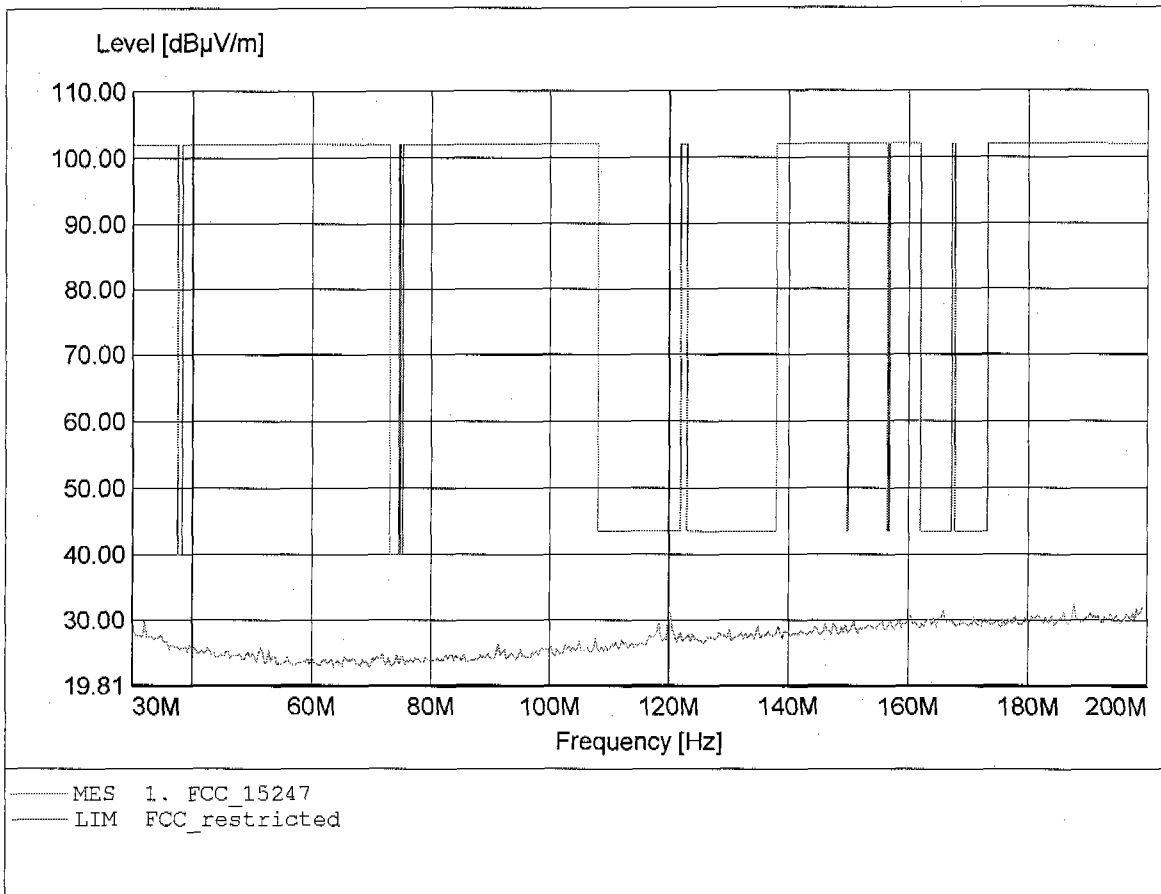


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 198.978MHz, Emax: 31.59dBµV/m, RBW: 100kHz

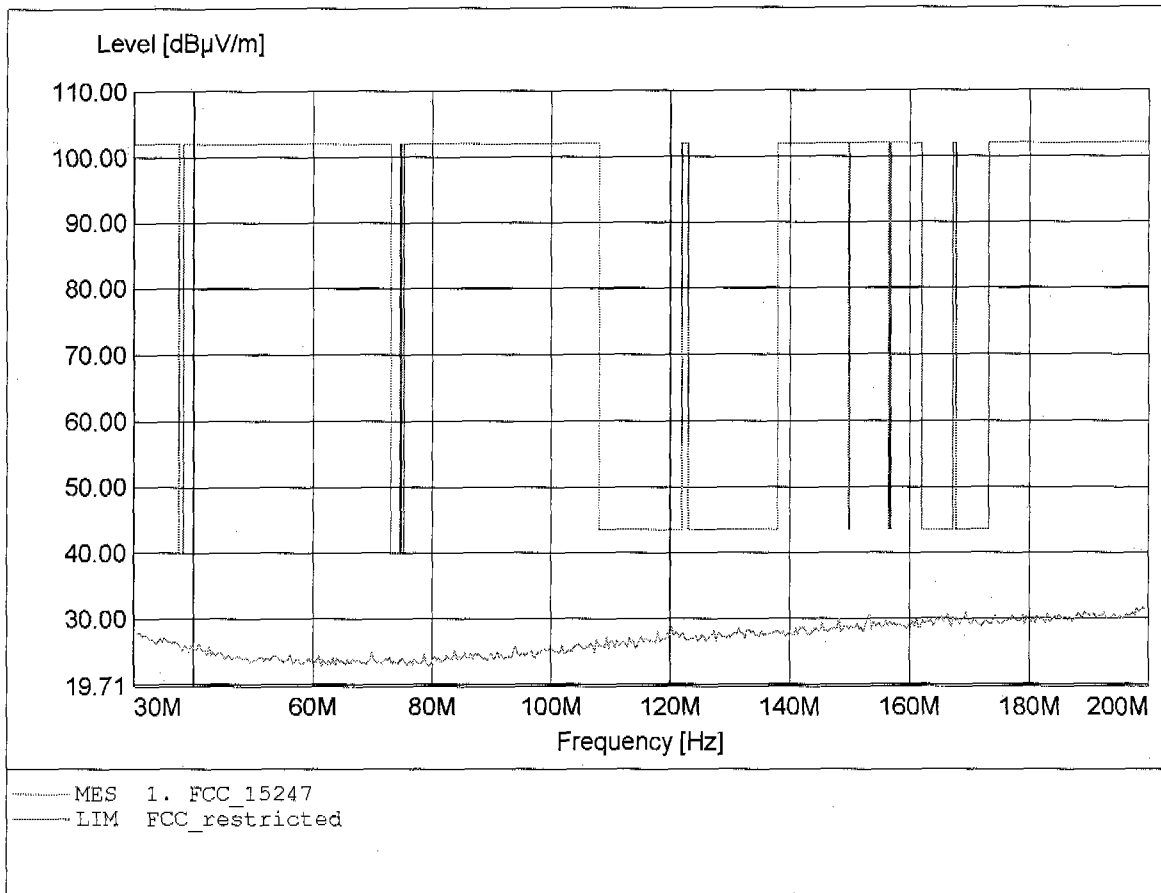


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 47
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 119.940MHz, Emax: 32.49dBµV/m, RBW: 100kHz

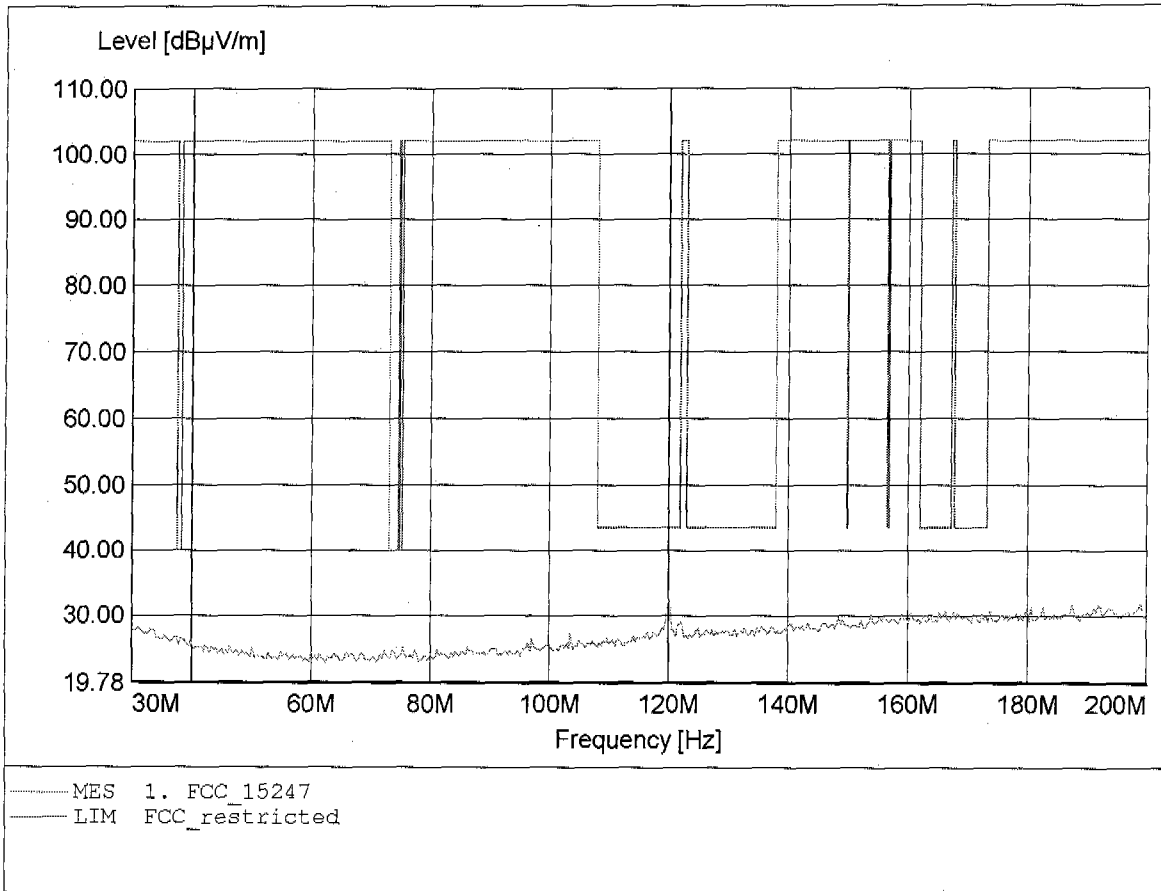


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 47
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 199.319MHz, Emax: 31.93dBµV/m, RBW: 100kHz

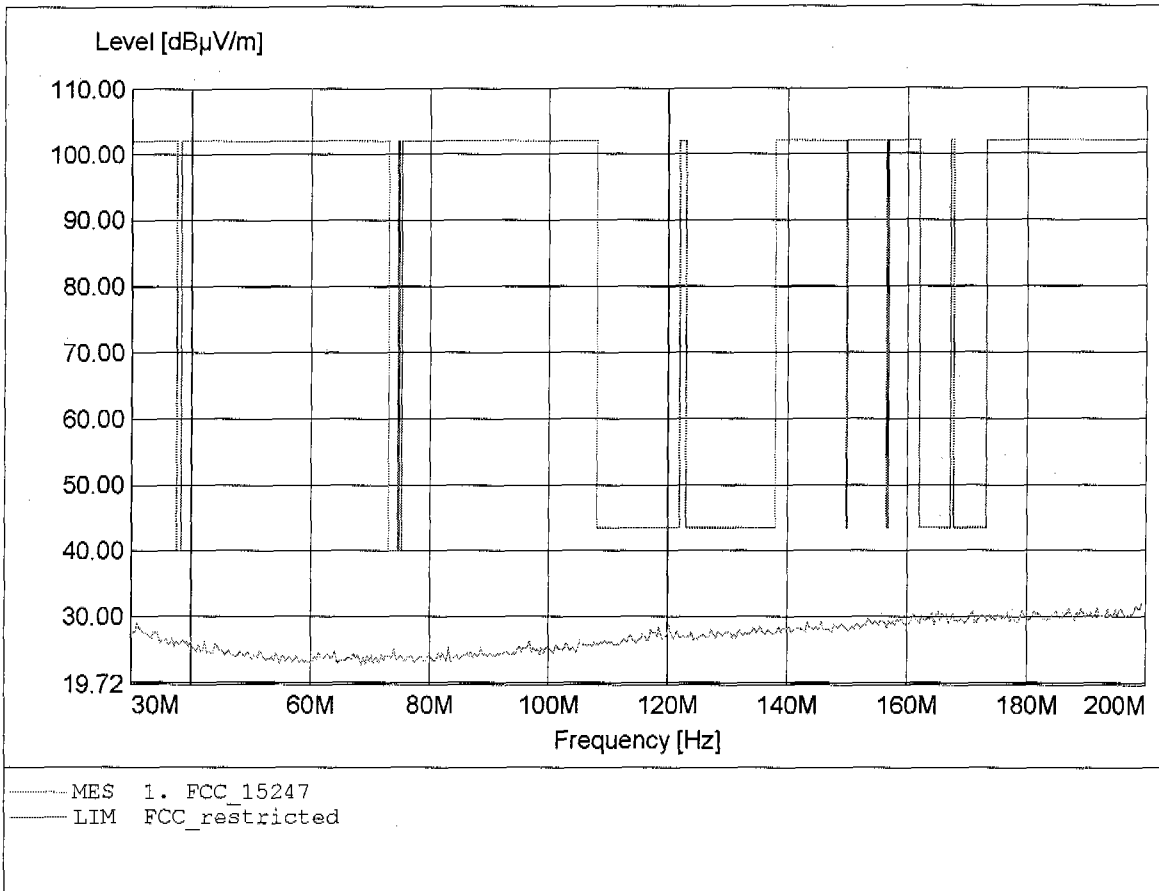


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 120.281MHz, Emax: 33.09dBµV/m, RBW: 100kHz

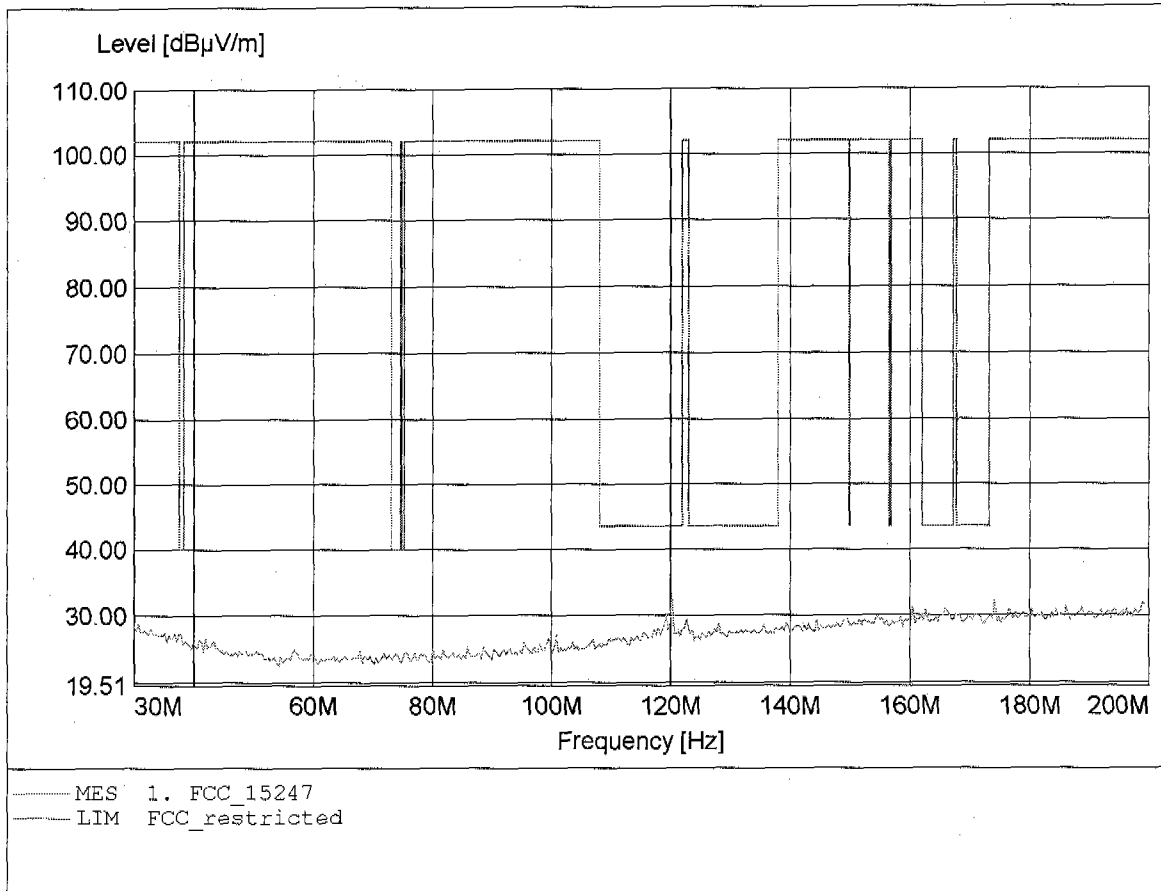


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 198.637MHz, Emax: 32.32dBµV/m, RBW: 100kHz

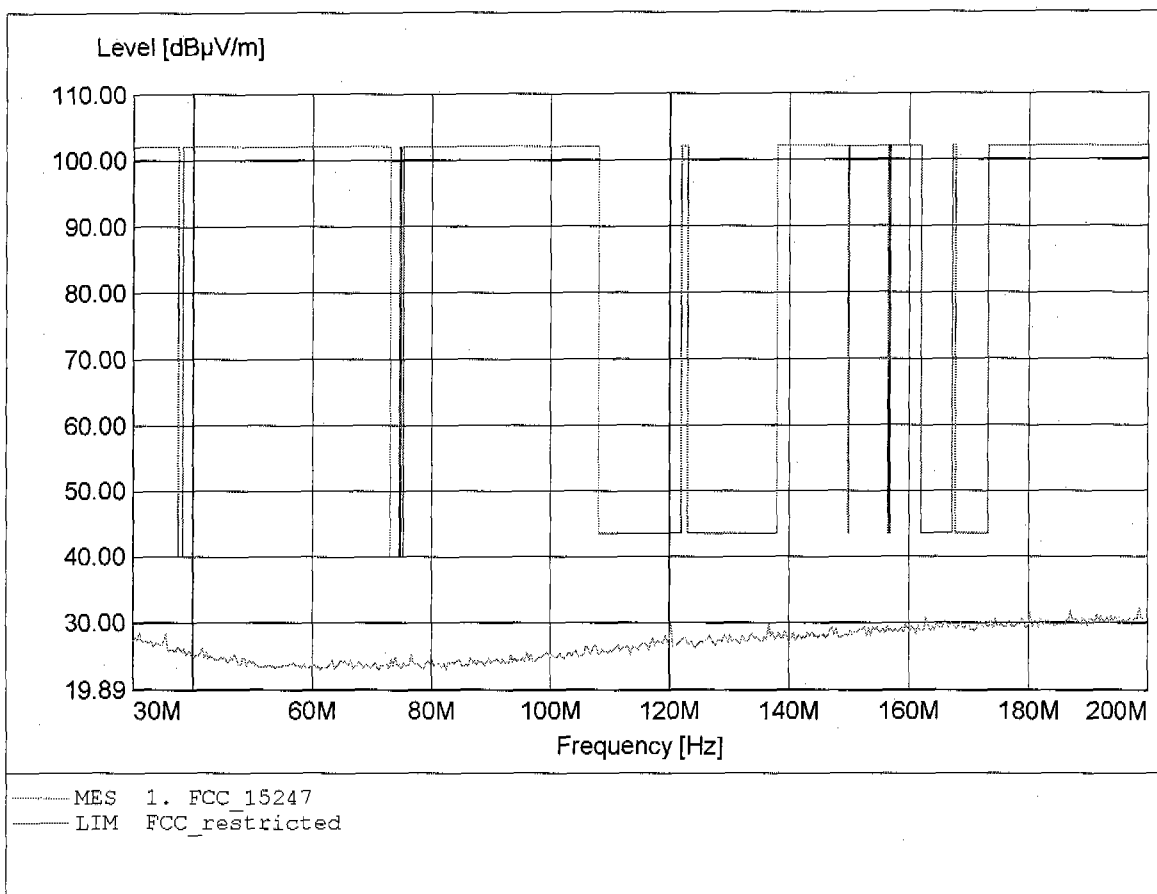


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 560.721MHz, Emax: 41.05dBµV/m, RBW: 100kHz

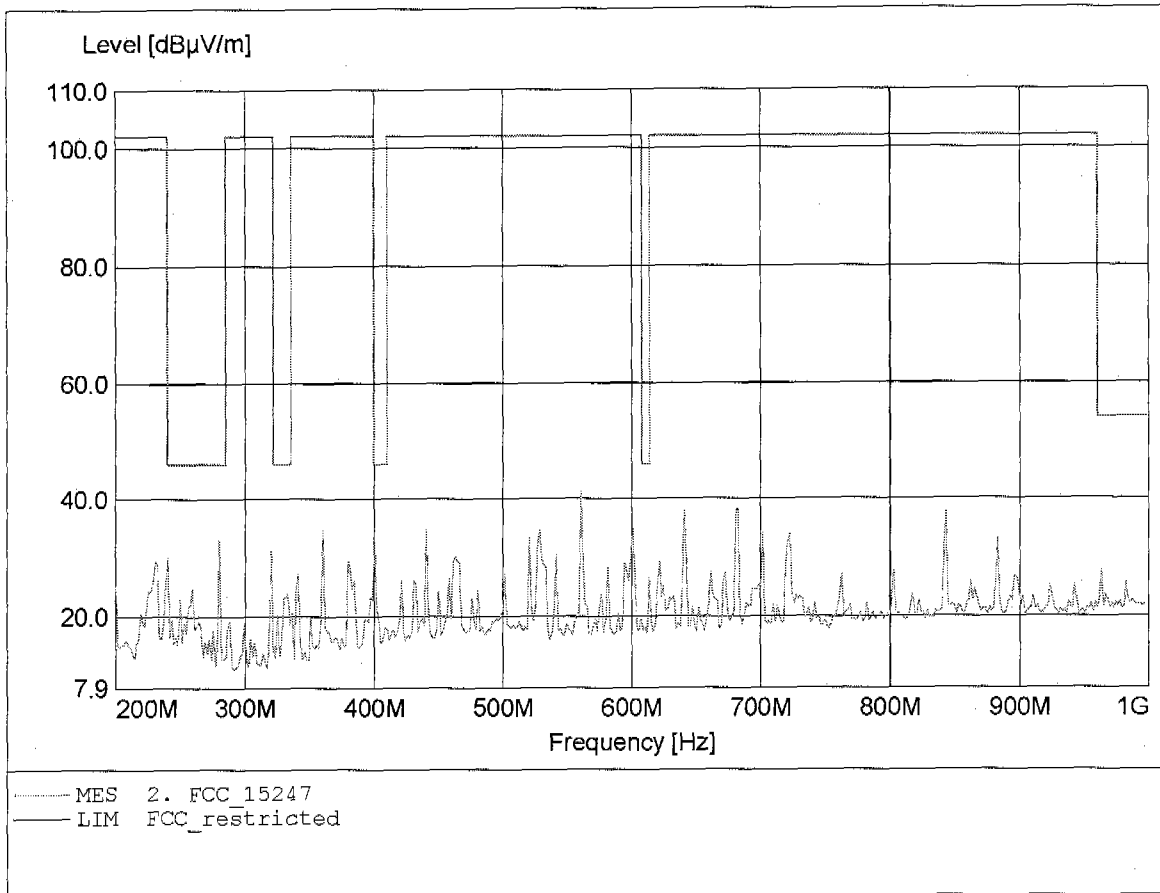


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 842.886MHz, Emax: 38.79dBµV/m, RBW: 100kHz

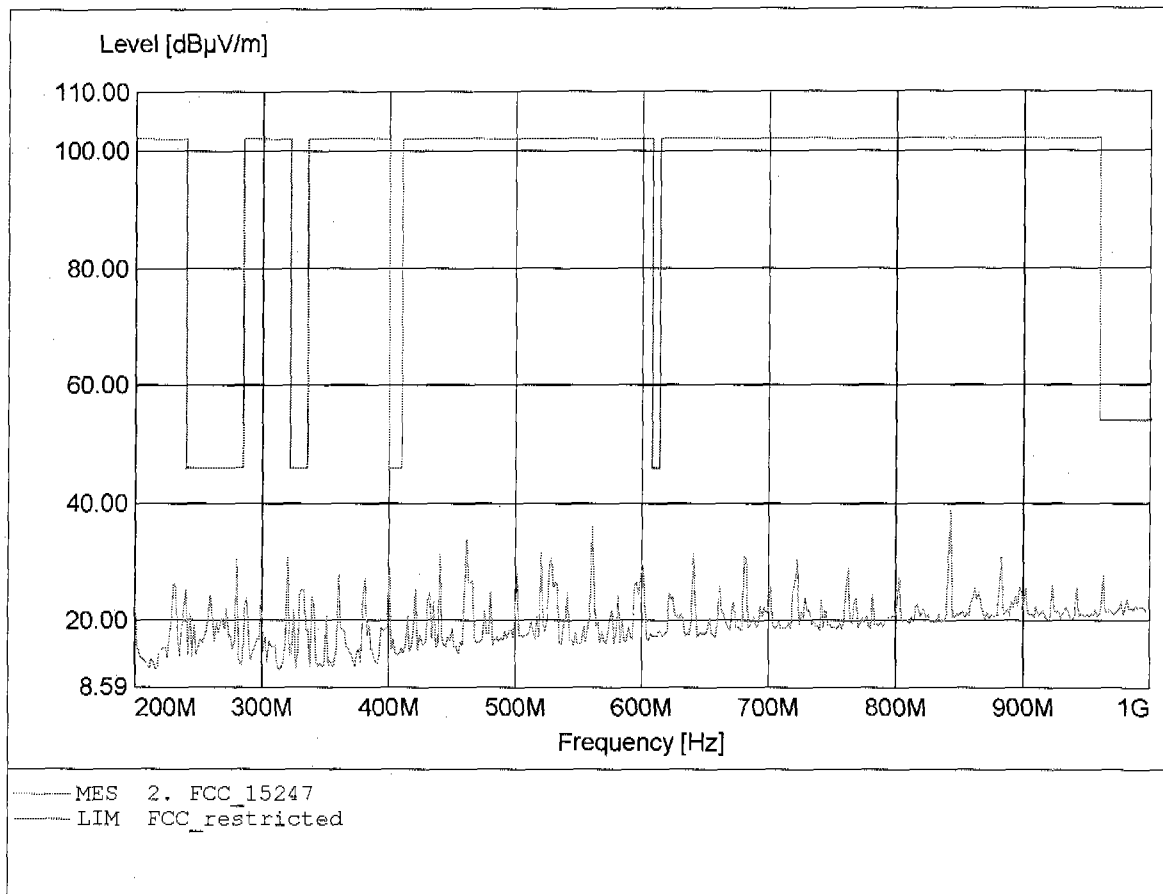


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 47
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 560.721MHz, Emax: 40.94dBµV/m, RBW: 100kHz

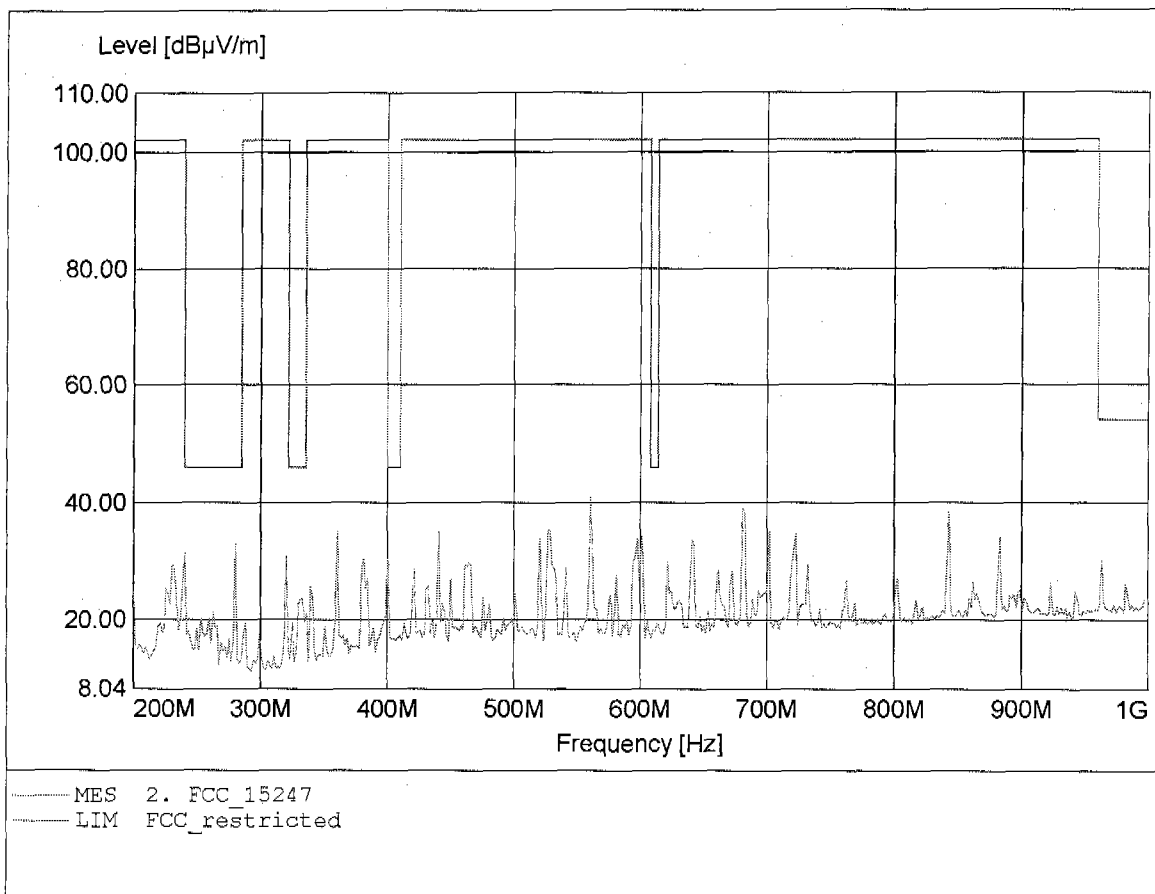


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 47
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 842.886MHz, Emax: 38.11dBµV/m, RBW: 100kHz

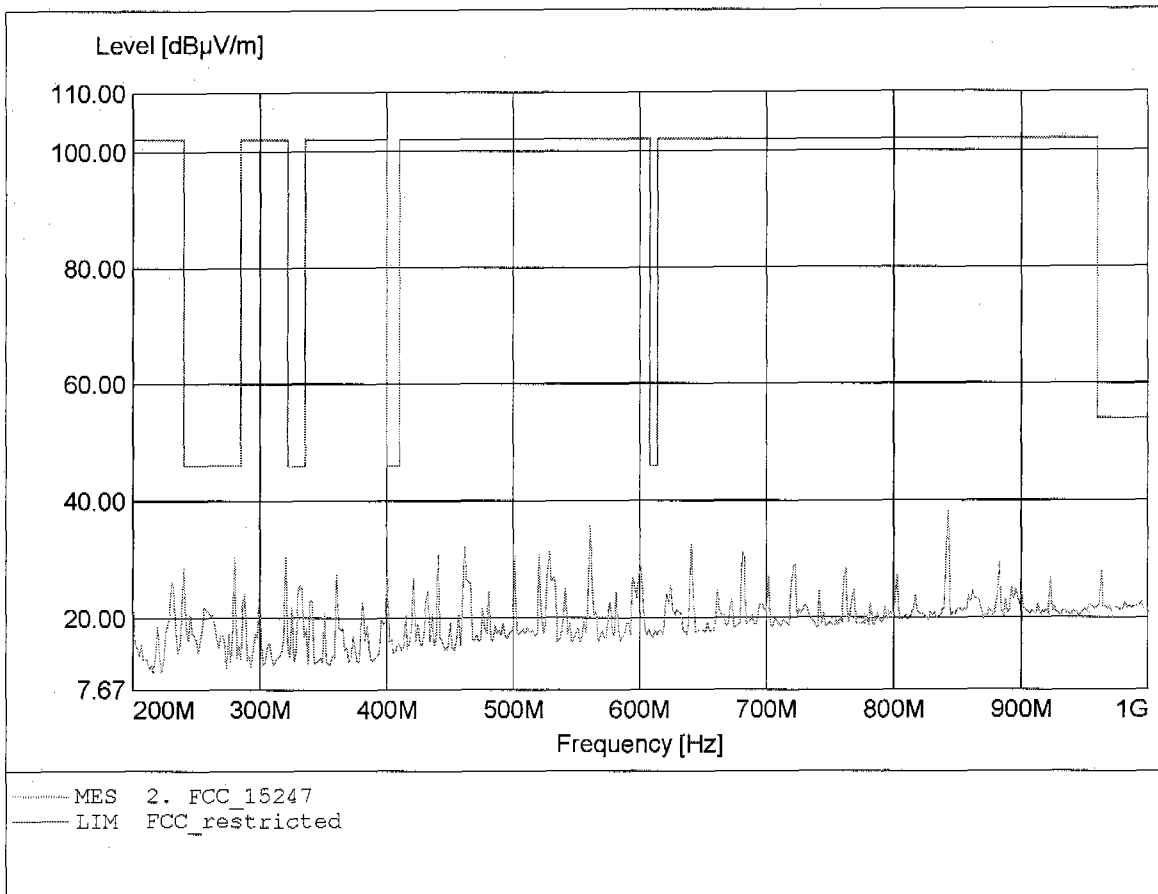


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 560.721MHz, Emax: 41.50dBµV/m, RBW: 100kHz

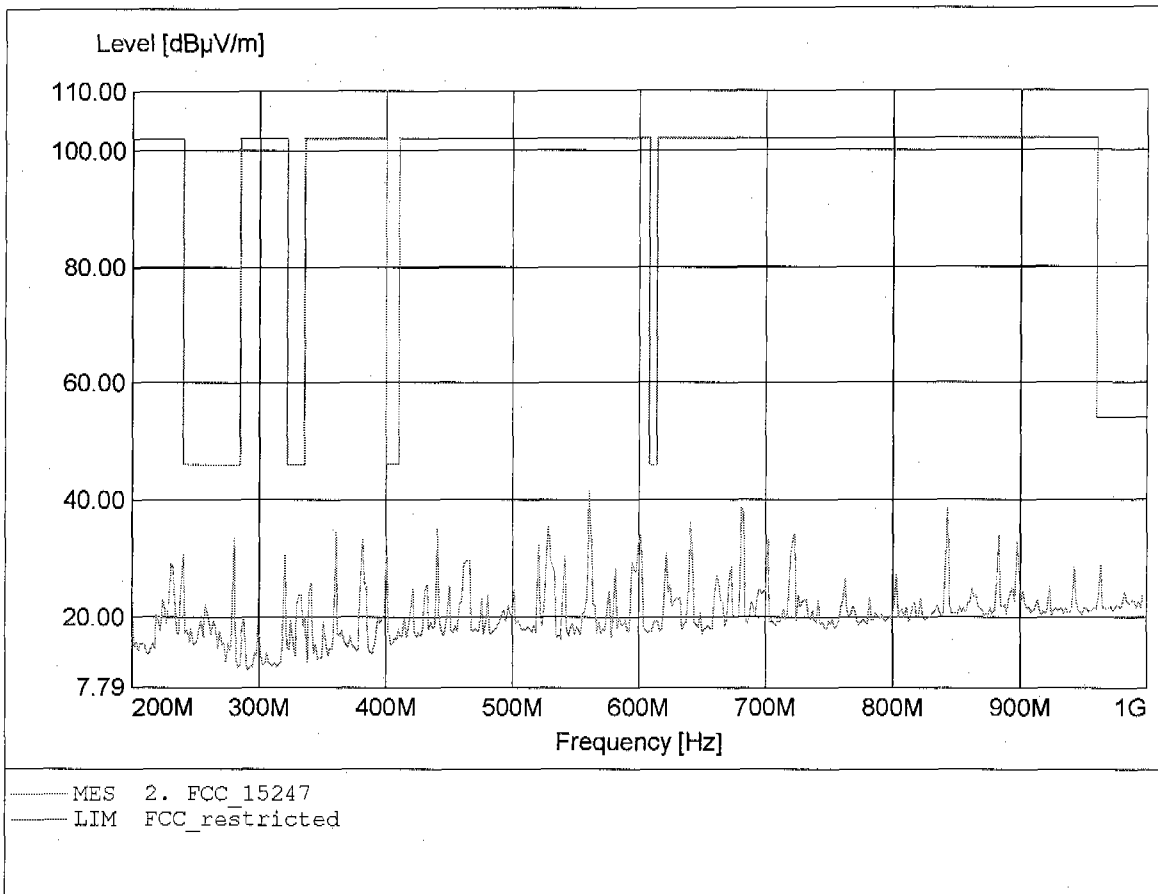


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 842.886MHz, Emax: 39.37dBµV/m, RBW: 100kHz

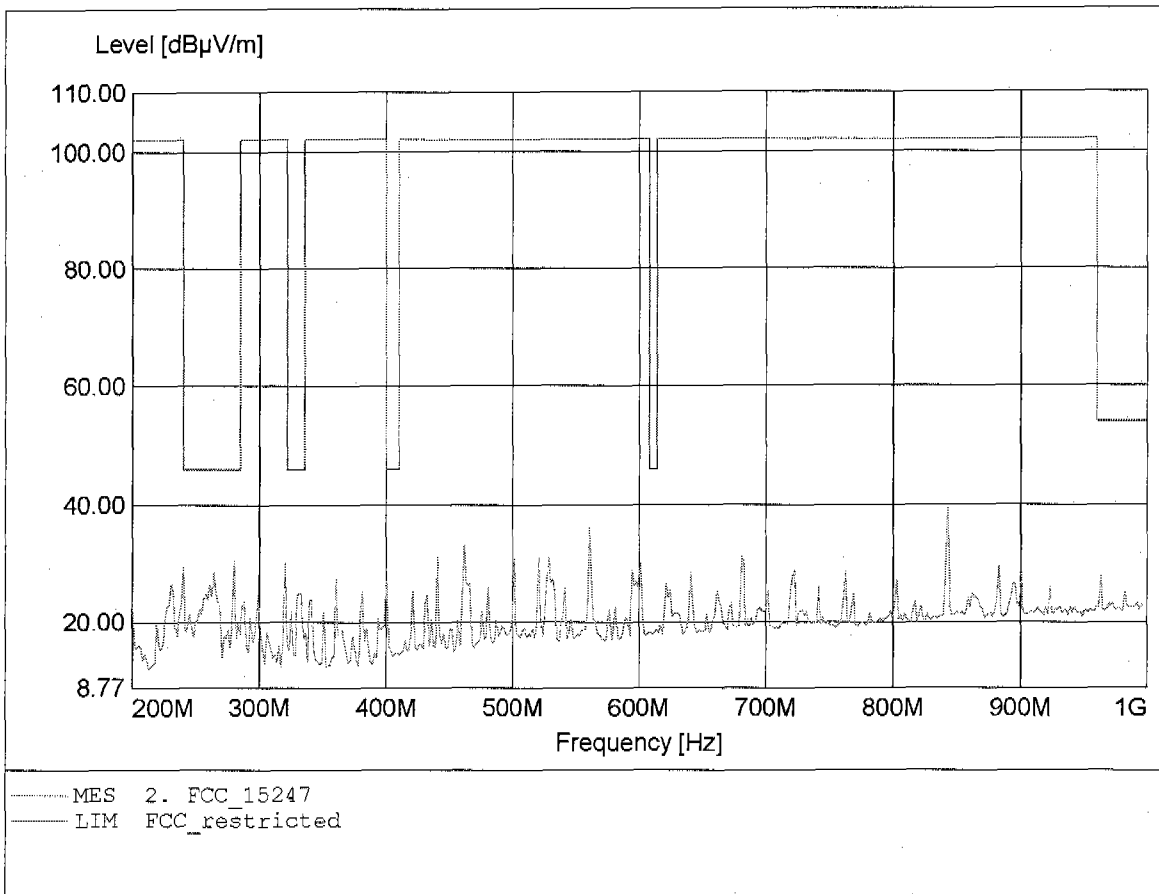


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.394GHz, Emax: 73.83dBµV/m, RBW: 1MHz

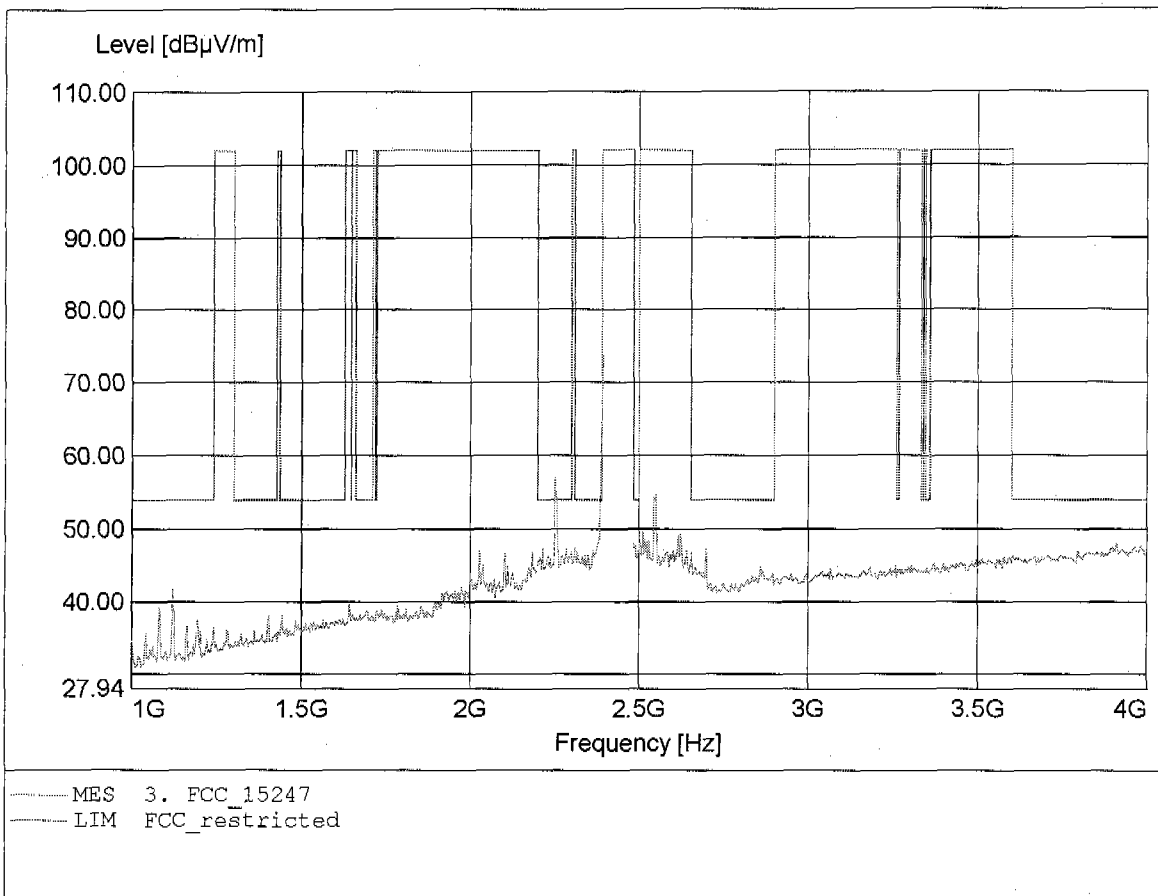


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.394GHz, Emax: 73.83dBµV/m, RBW: 1MHz

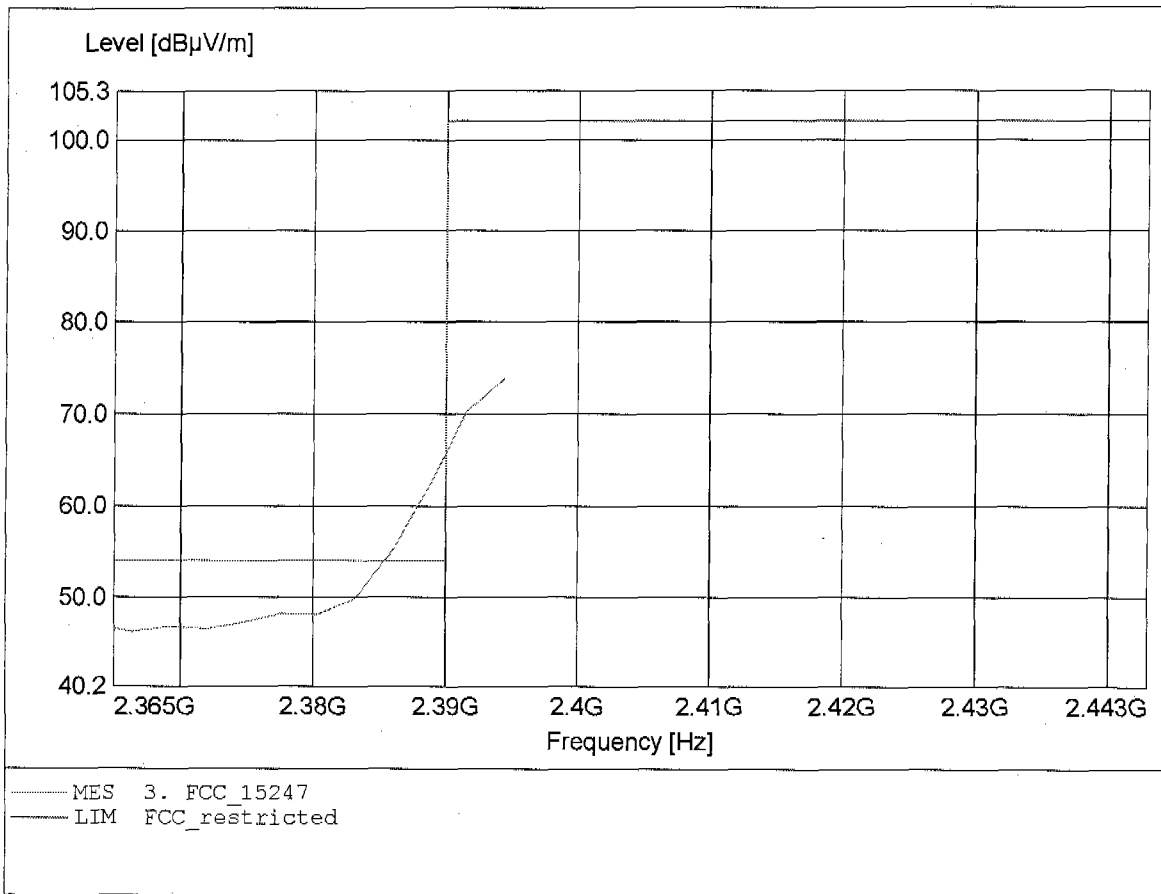


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.254GHz, Emax: 48.83dBµV/m, RBW: 1MHz

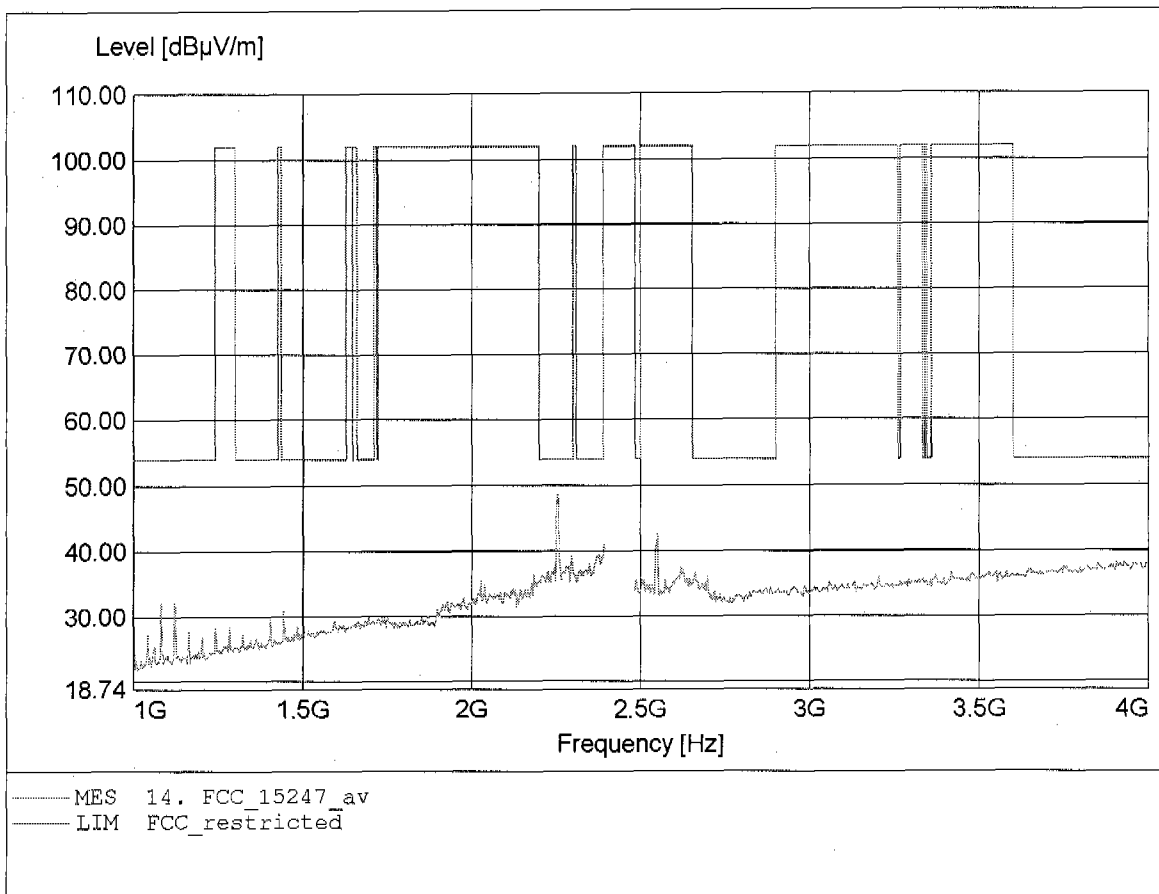


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.394GHz, Emax: 79.41dBµV/m, RBW: 1MHz

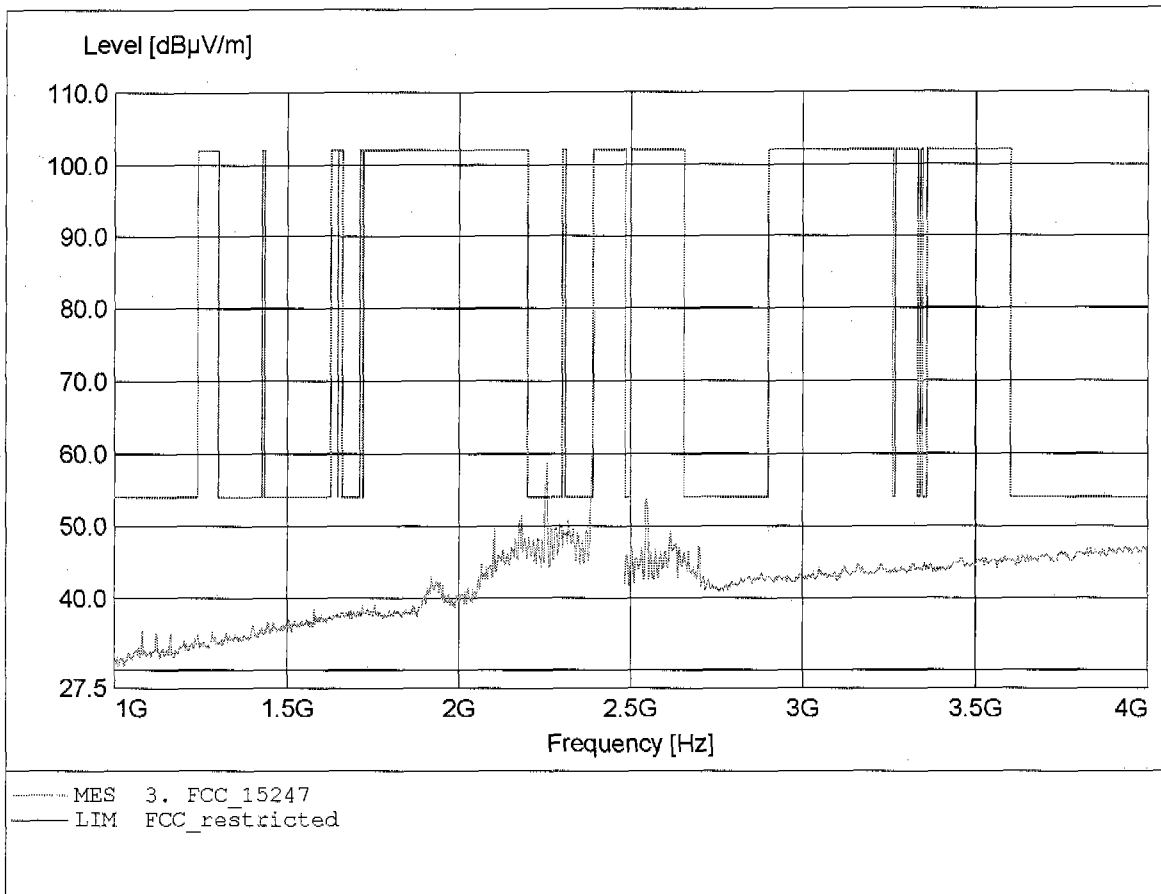


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.394GHz, Emax: 79.41dBµV/m, RBW: 1MHz

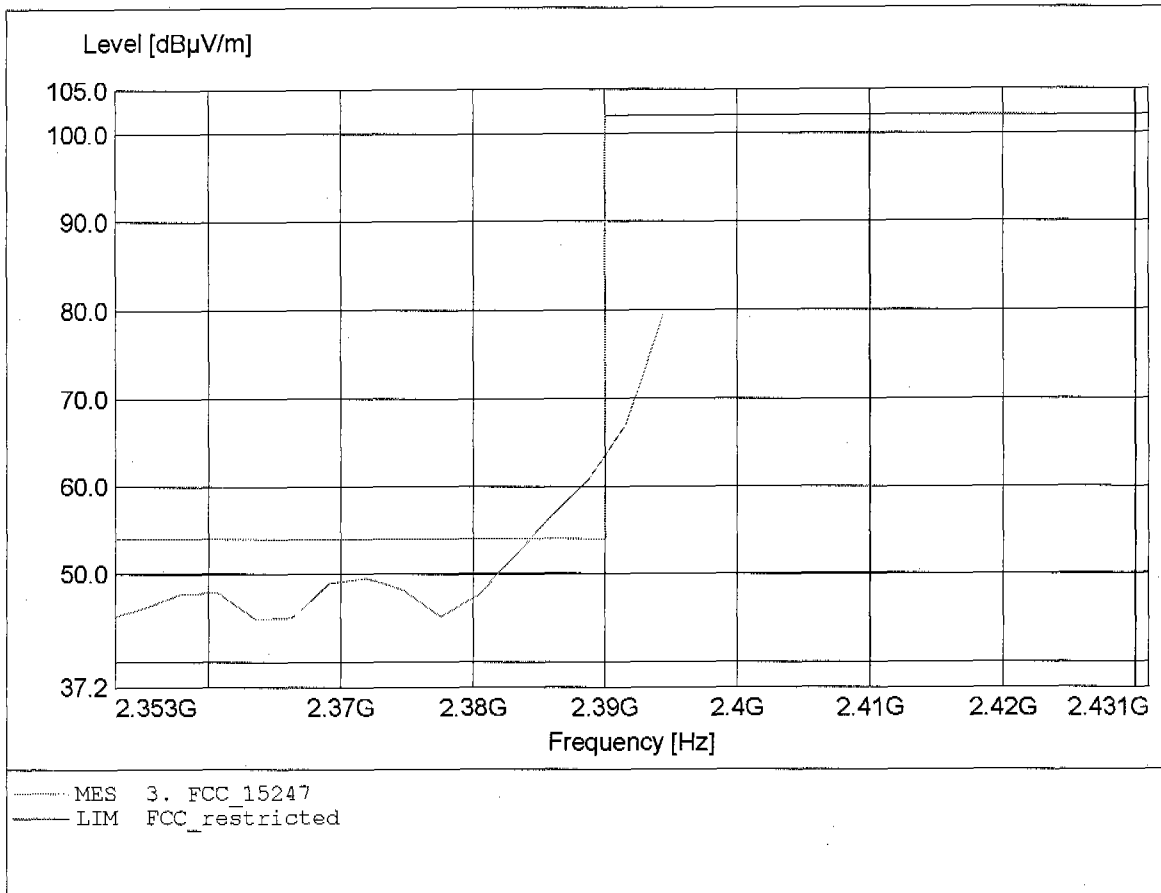


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.254GHz, Emax: 49.70dBµV/m, RBW: 1MHz

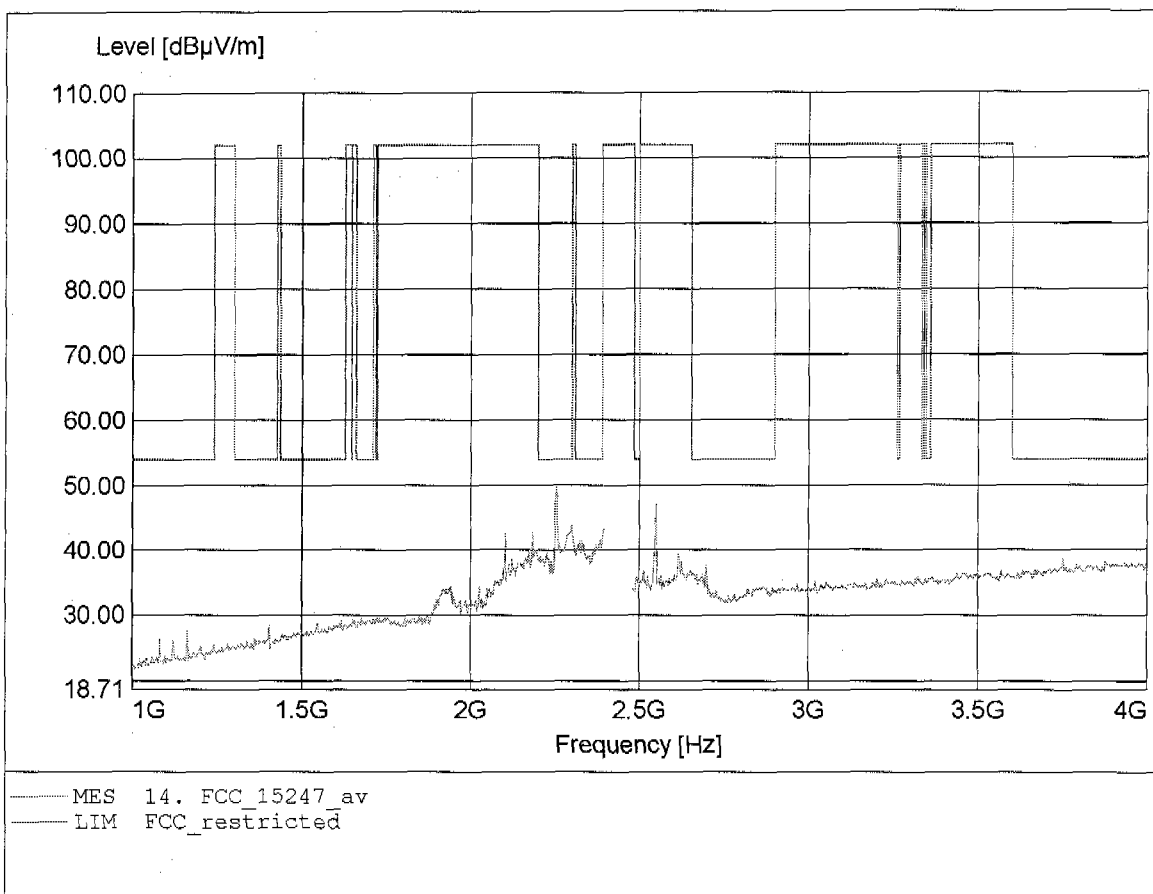


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 47
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.291GHz, Emax: 57.27dBµV/m, RBW: 1MHz

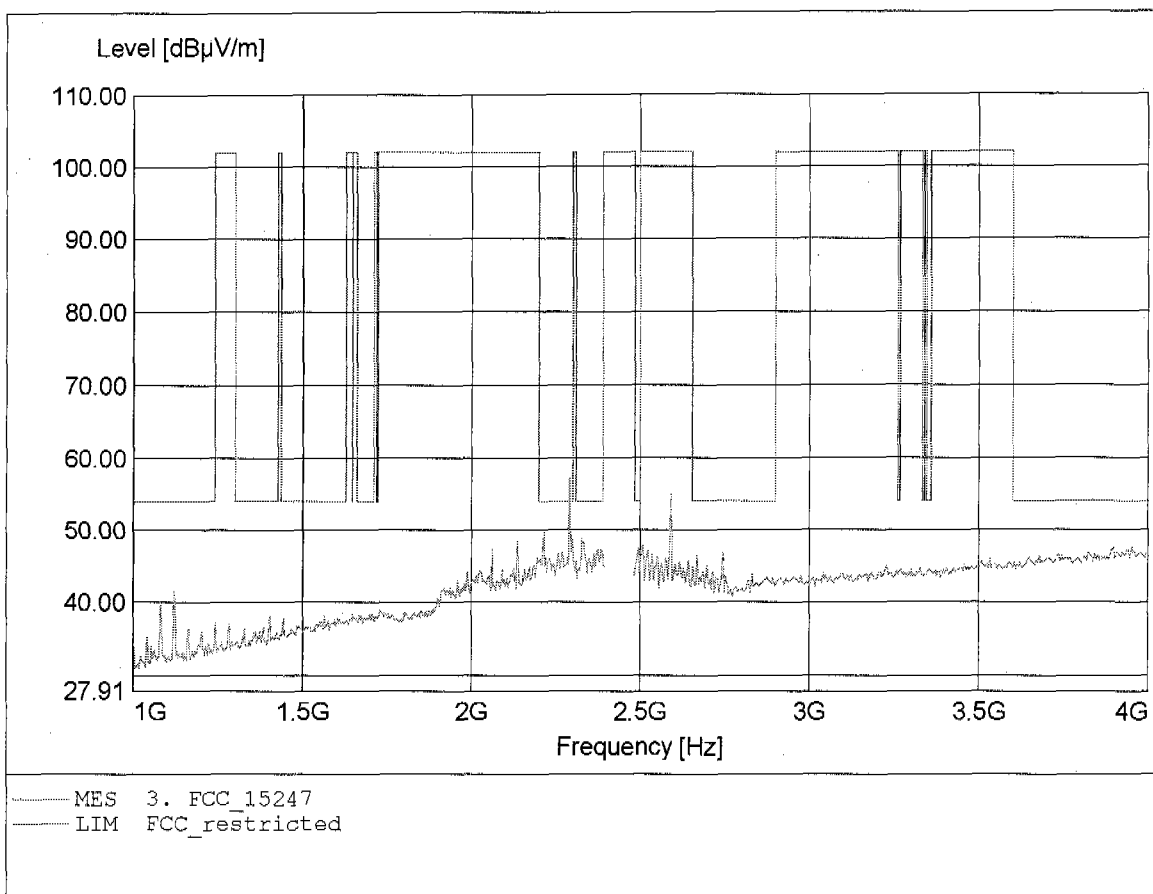


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 47
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.593GHz, Emax: 41.37dBµV/m, RBW: 1MHz

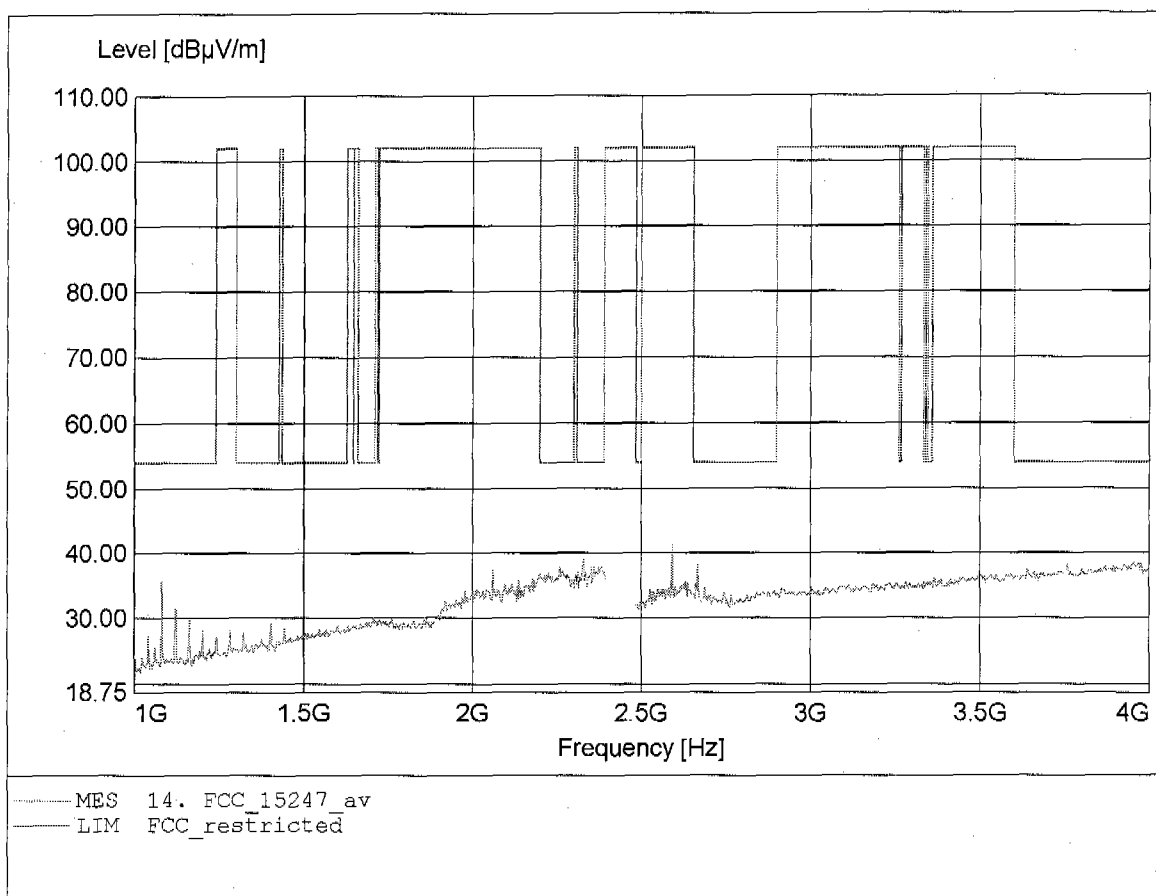


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 47
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.291GHz, Emax: 57.87dBµV/m, RBW: 1MHz

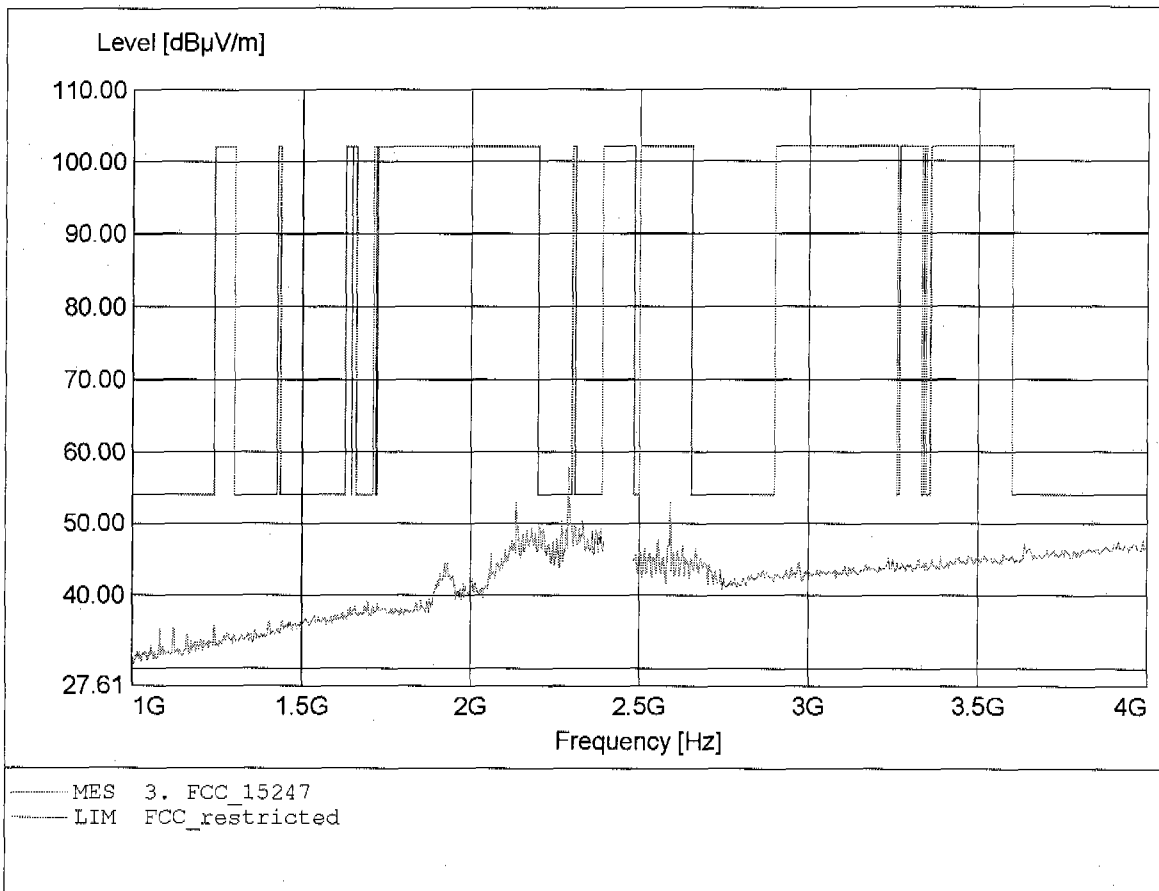


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 47
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.291GHz, Emax: 53.02dBµV/m, RBW: 1MHz

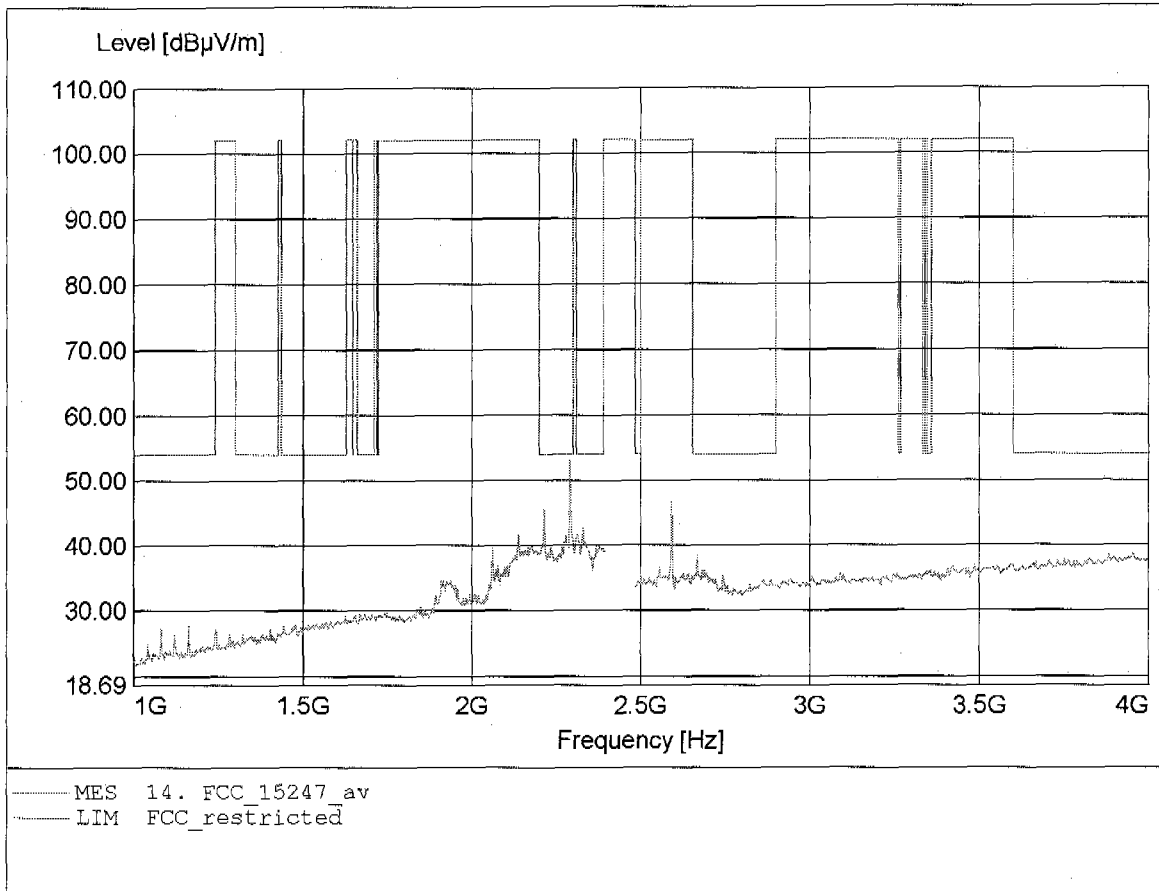


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.484GHz, Emax: 101.88dBµV/m, RBW: 1MHz

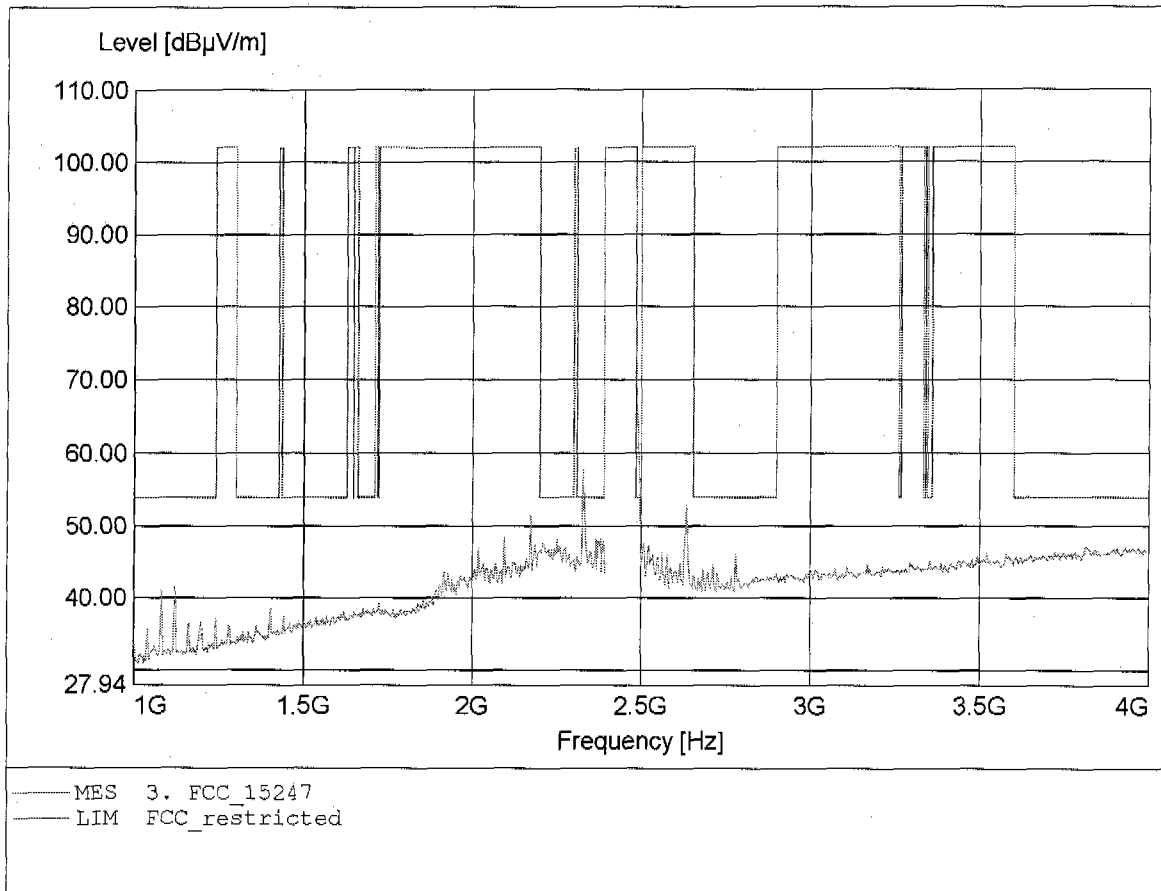


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.484GHz, Emax: 101.88dBµV/m, RBW: 1MHz

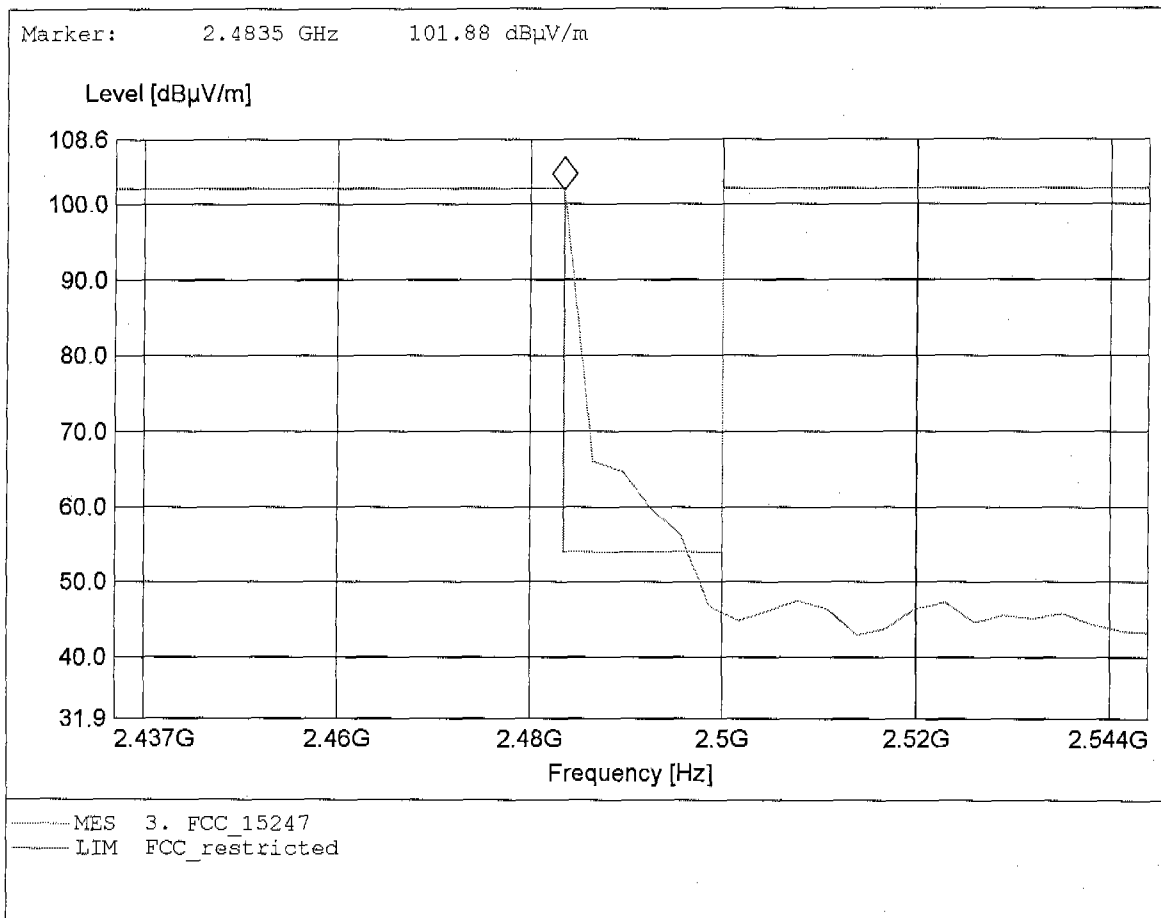


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.484GHz, Emax: 92.87dBµV/m, RBW: 1MHz

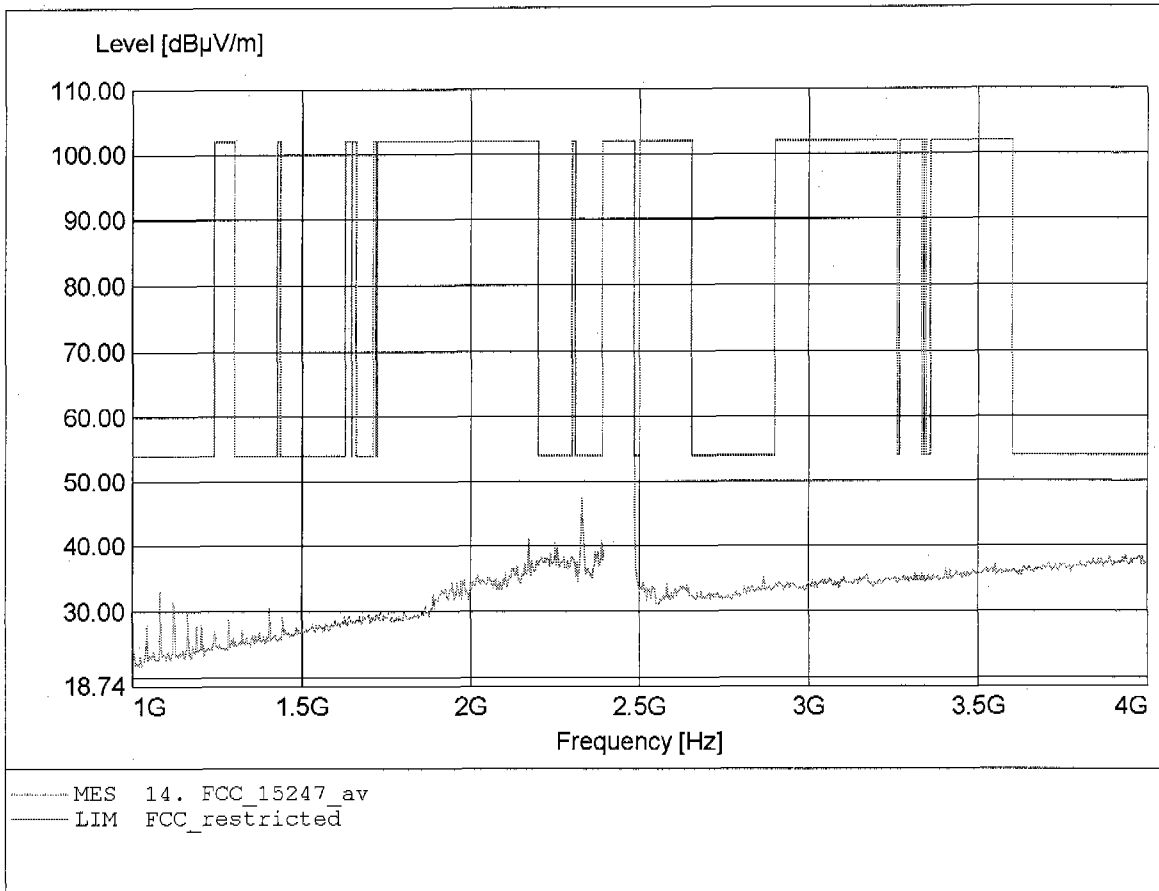


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.484GHz, Emax: 92.87dBµV/m, RBW: 1MHz

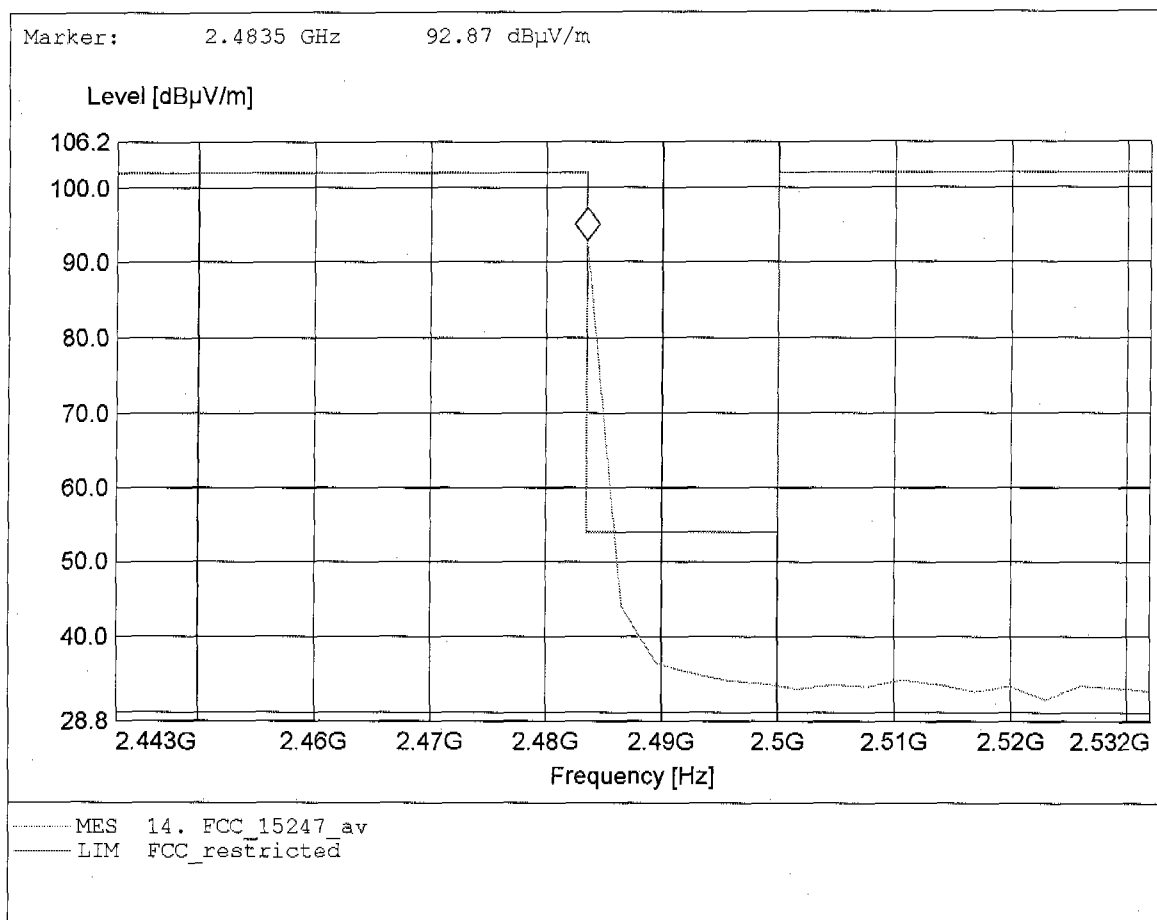


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.484GHz, Emax: 102.11dBµV/m, RBW: 1MHz

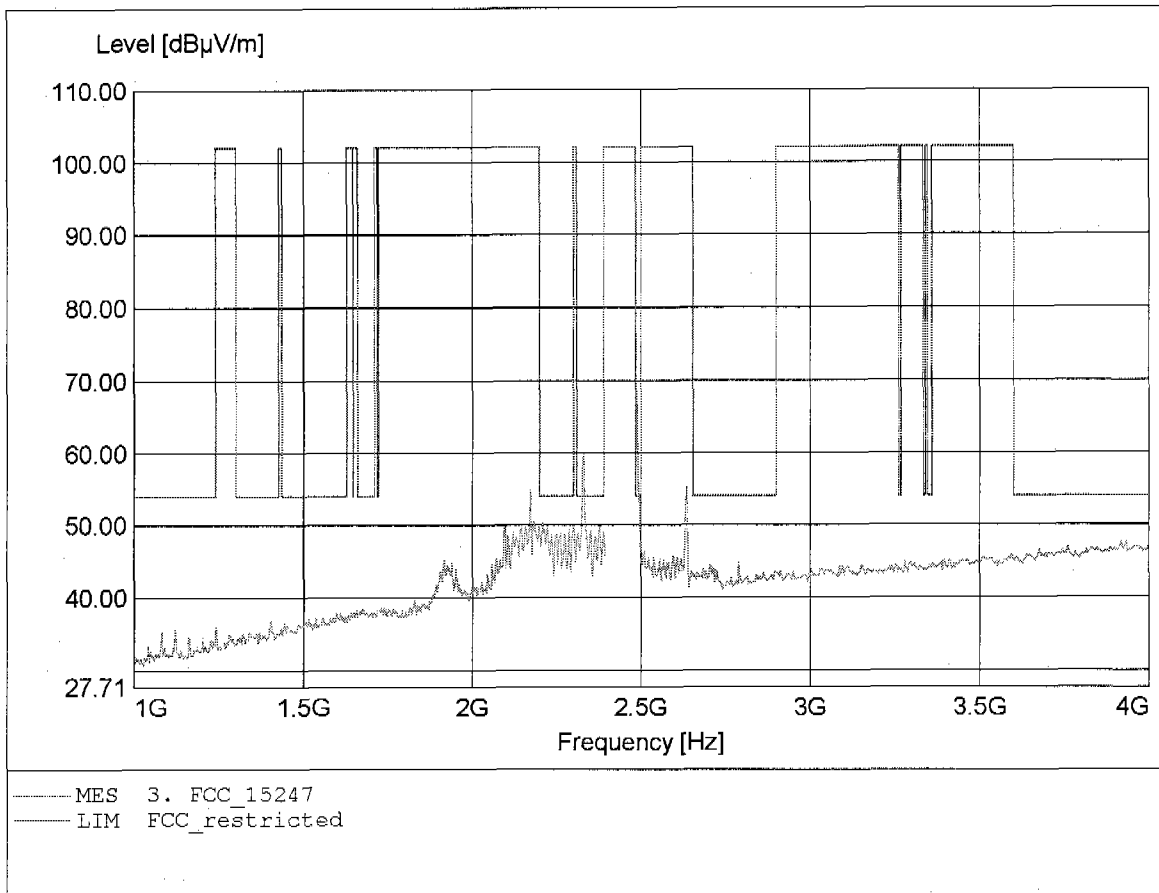


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.484GHz, Emax: 102.11dBµV/m, RBW: 1MHz

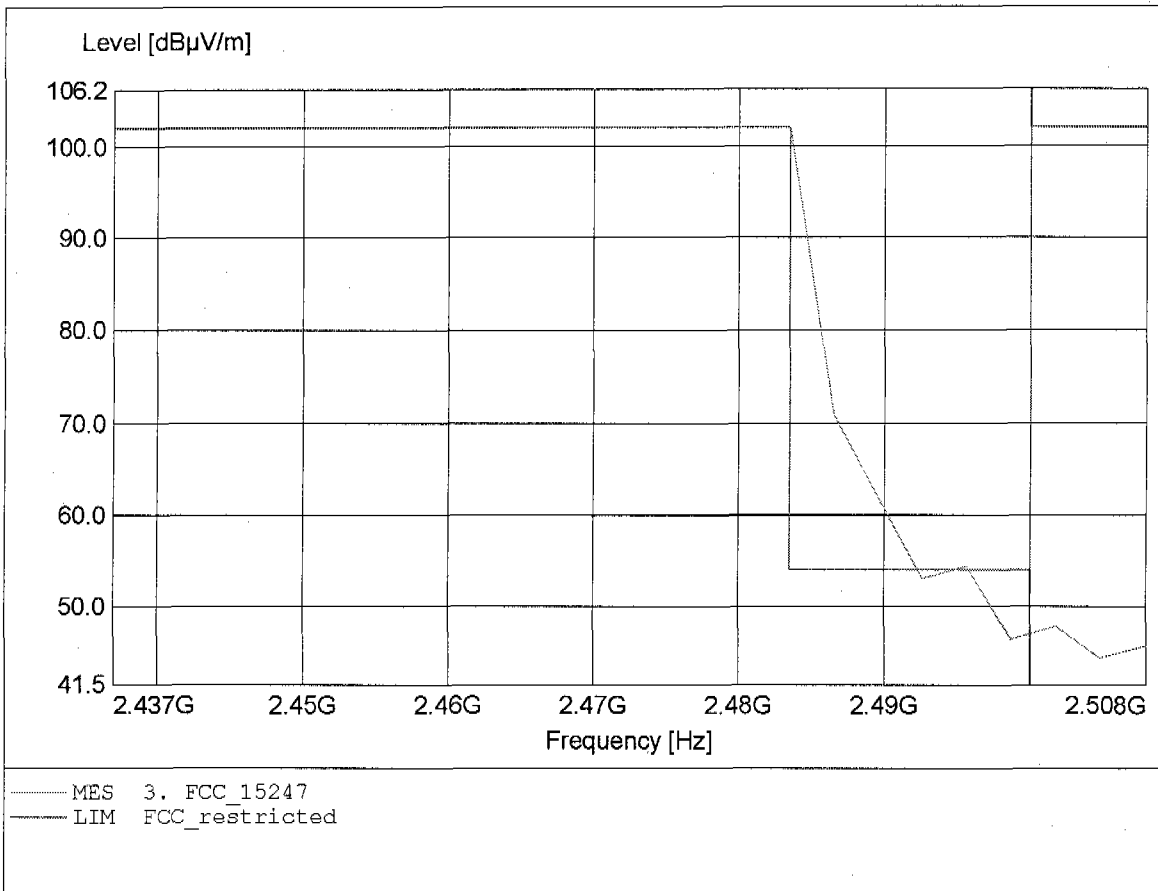


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.484GHz, Emax: 92.73dBµV/m, RBW: 1MHz

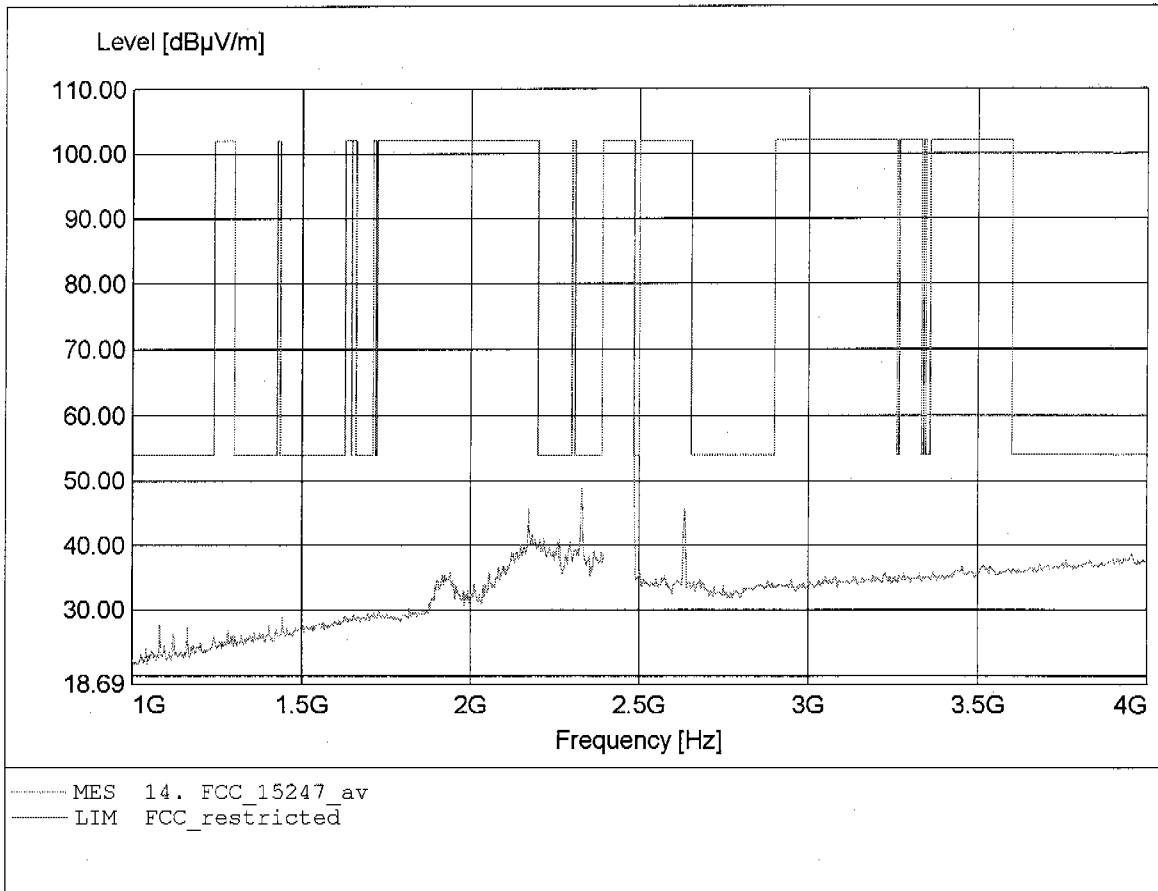


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.484GHz, Emax: 92.73dBµV/m, RBW: 1MHz

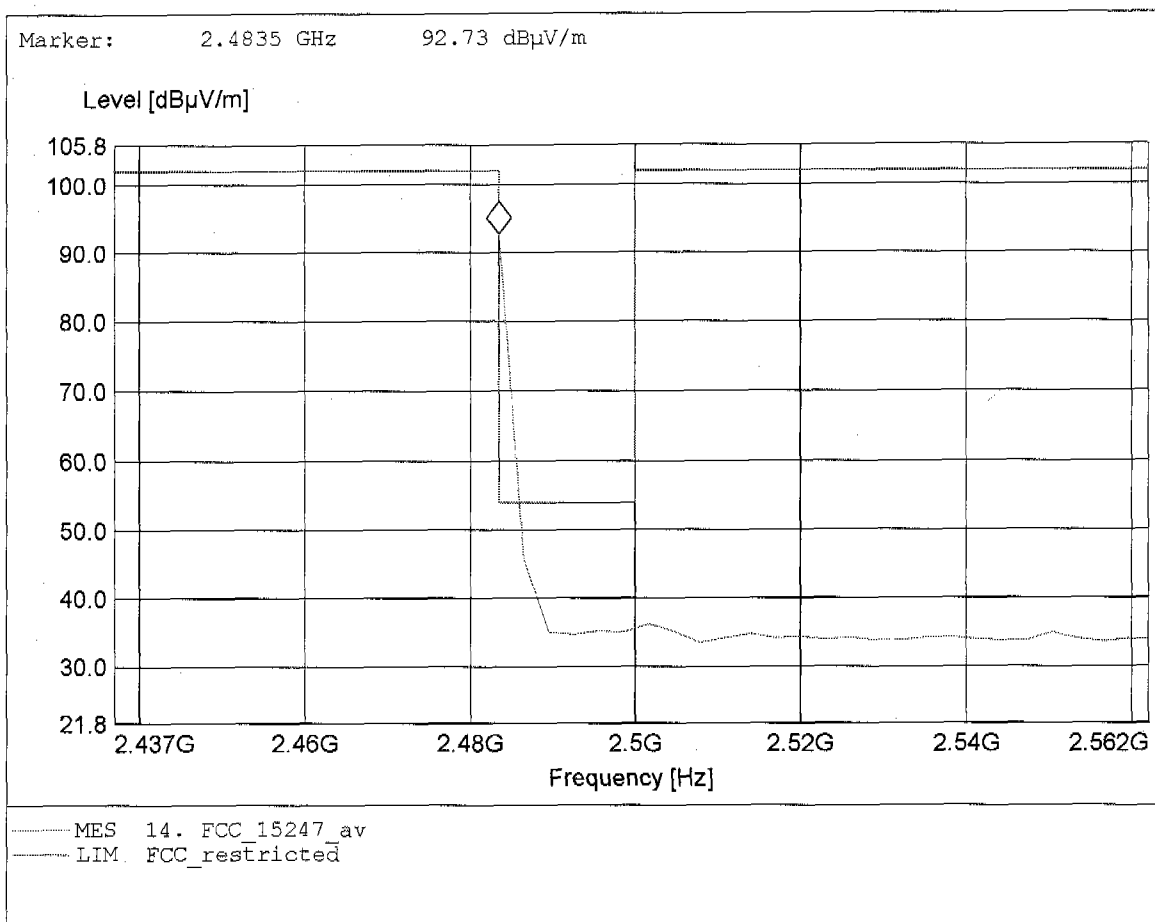


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 58.58dBµV/m, RBW: 1MHz

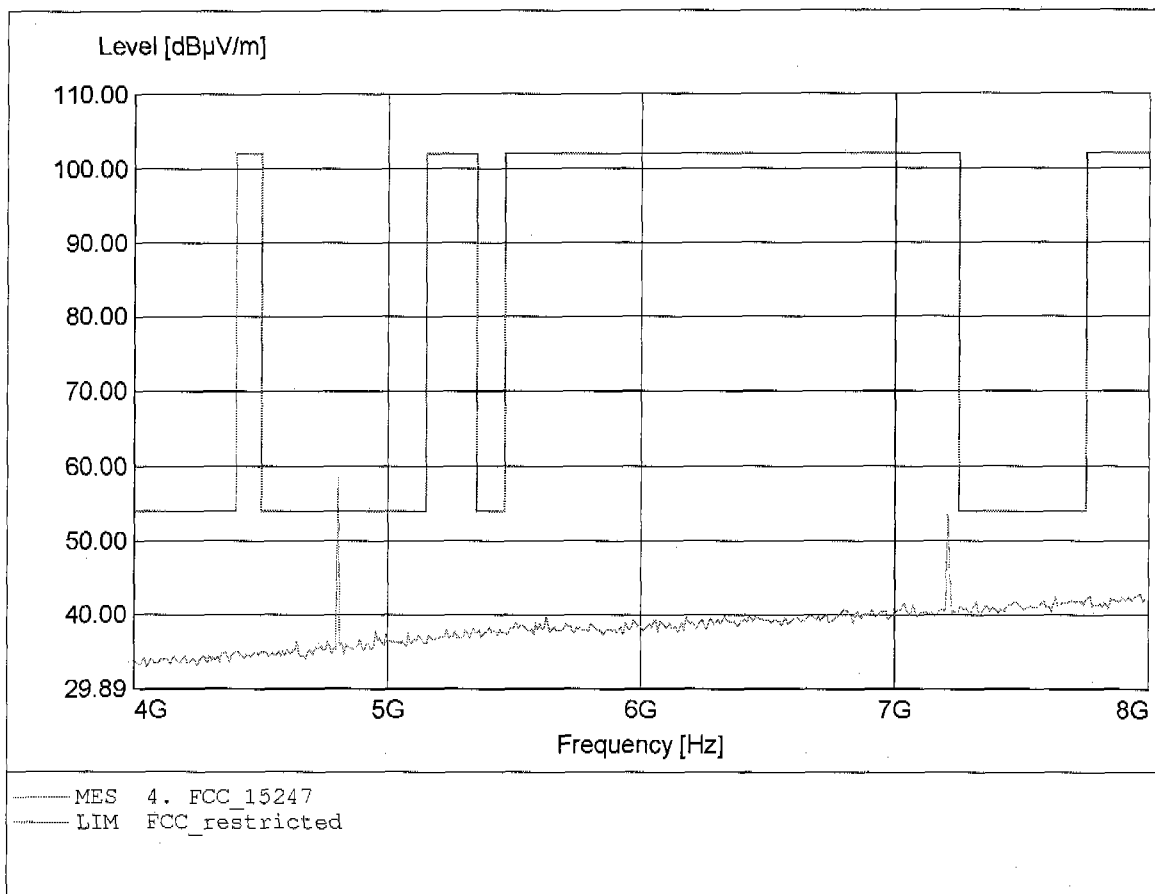


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 37.54dBµV/m, RBW: 1MHz

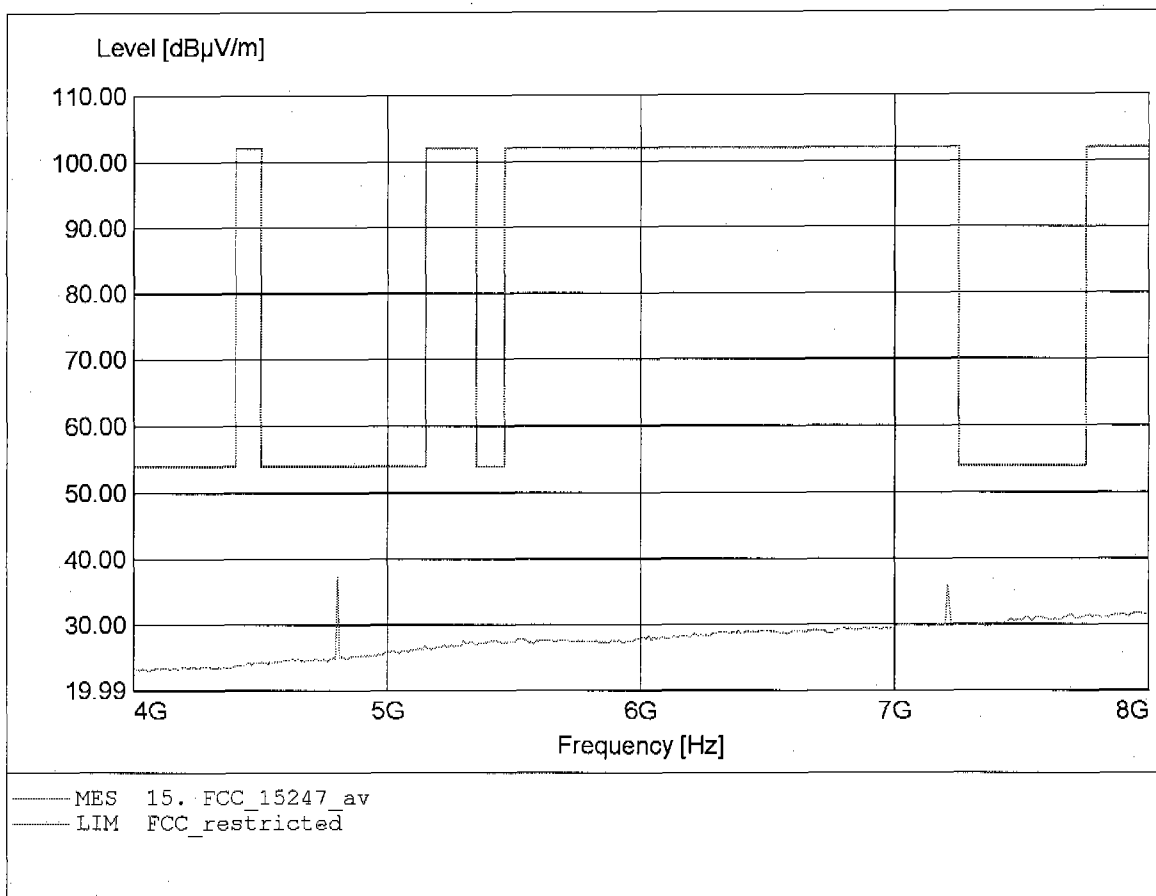


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 61.92dBµV/m, RBW: 1MHz

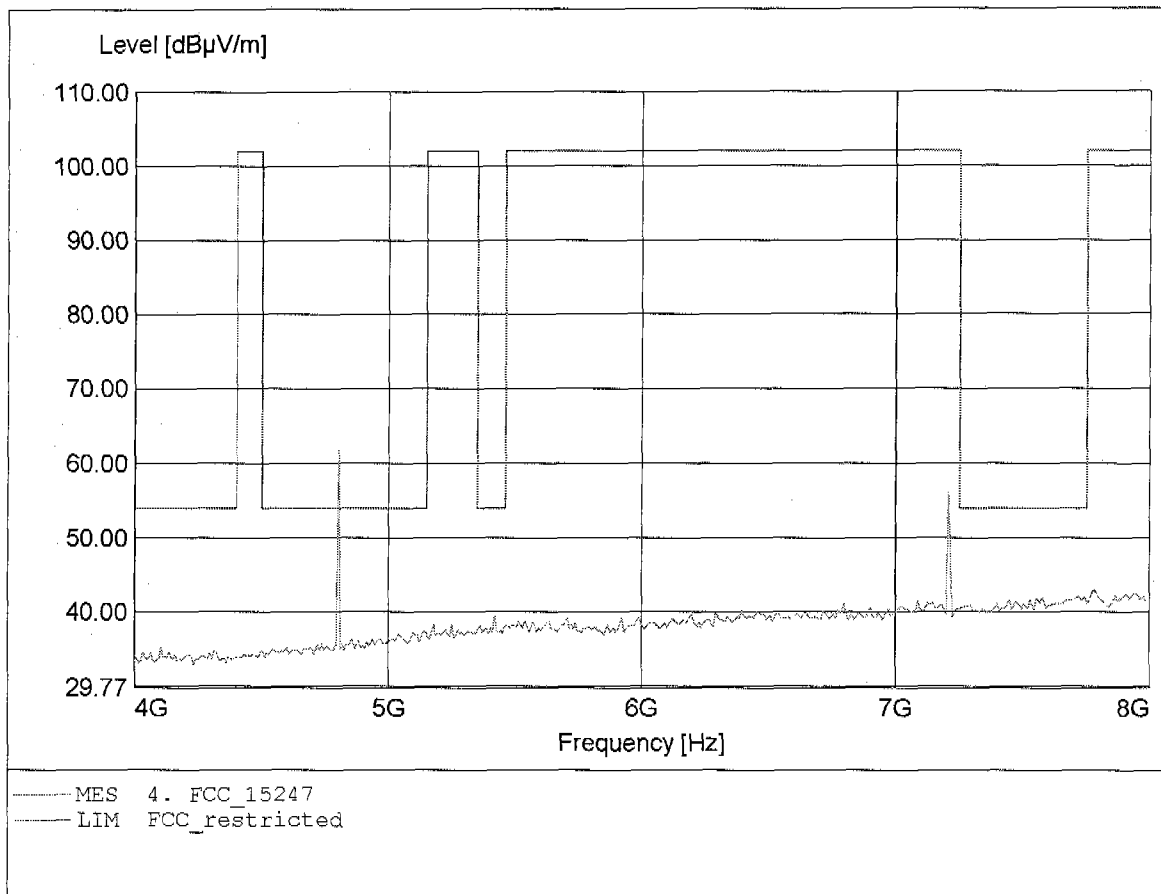


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 41.60dBµV/m, RBW: 1MHz

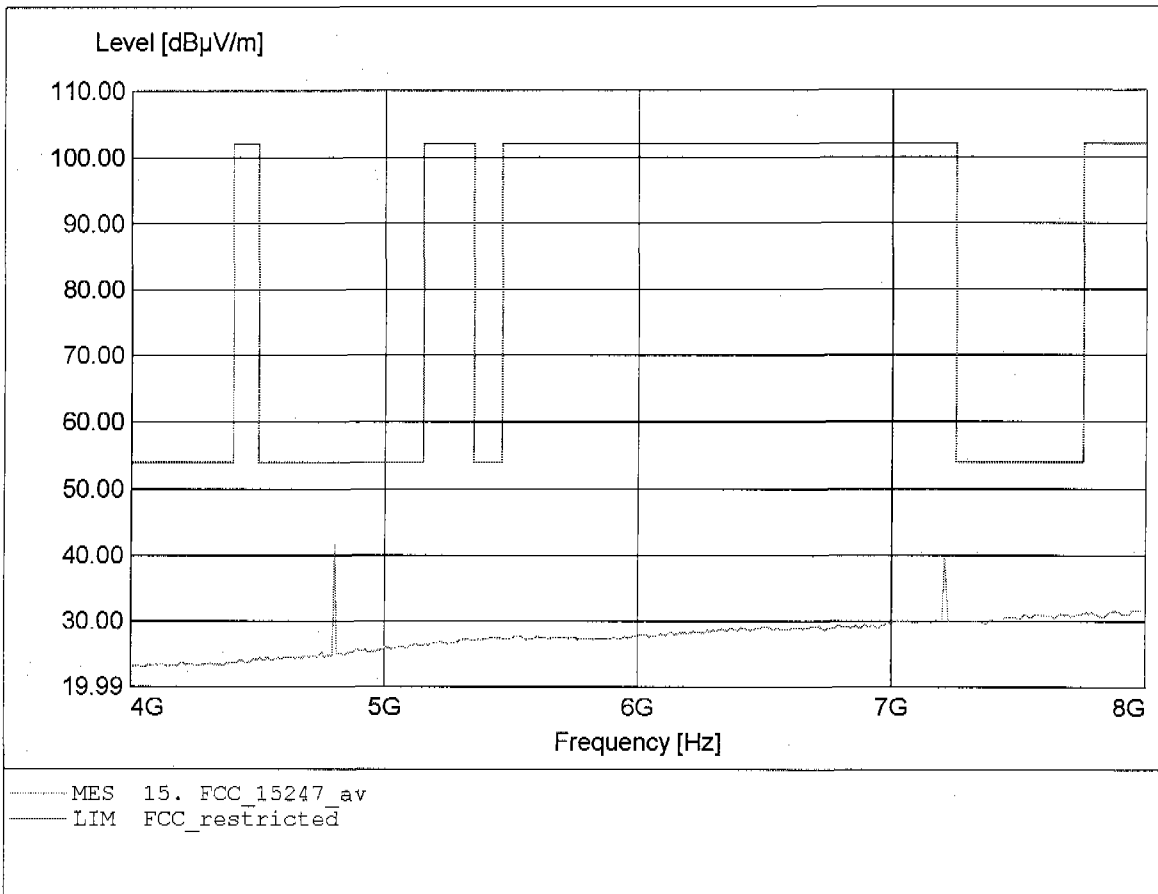


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 47
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.327GHz, Emax: 62.28dBµV/m, RBW: 1MHz

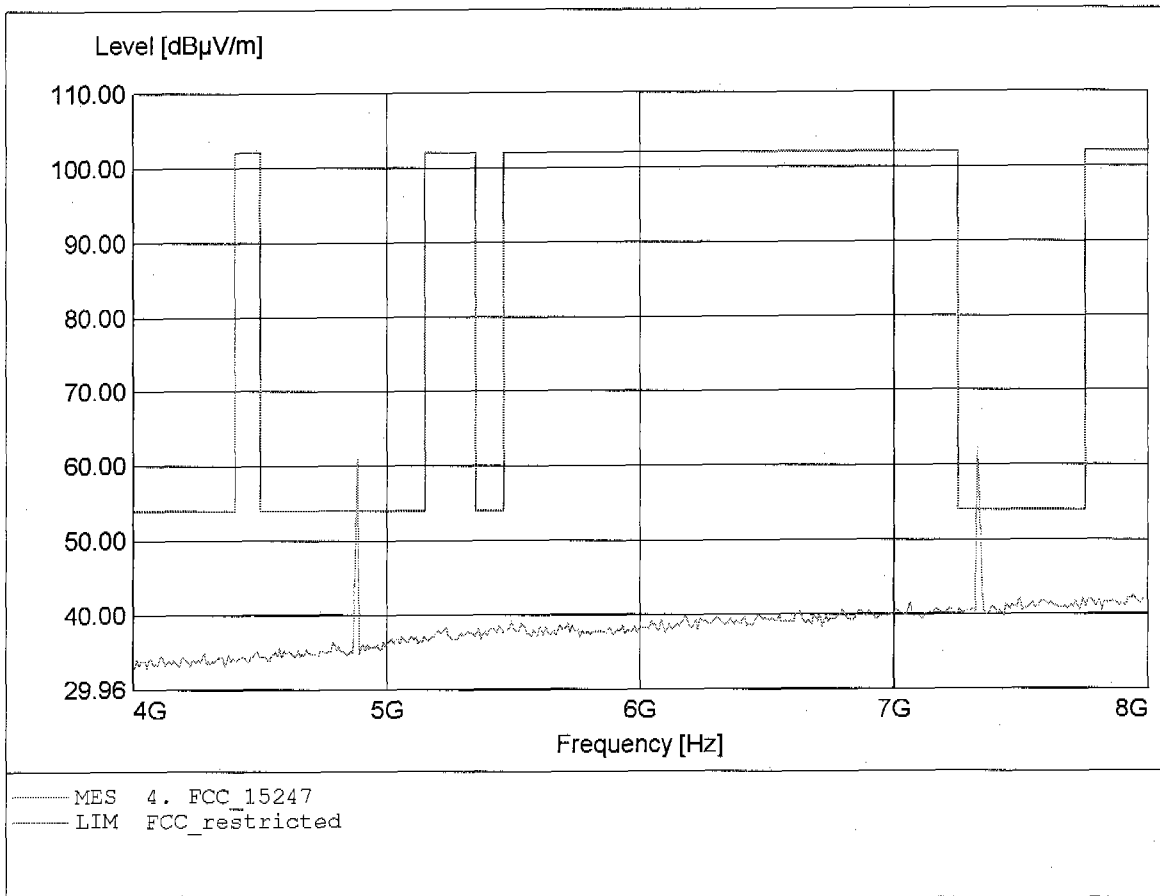


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 47
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 42.16dBµV/m, RBW: 1MHz

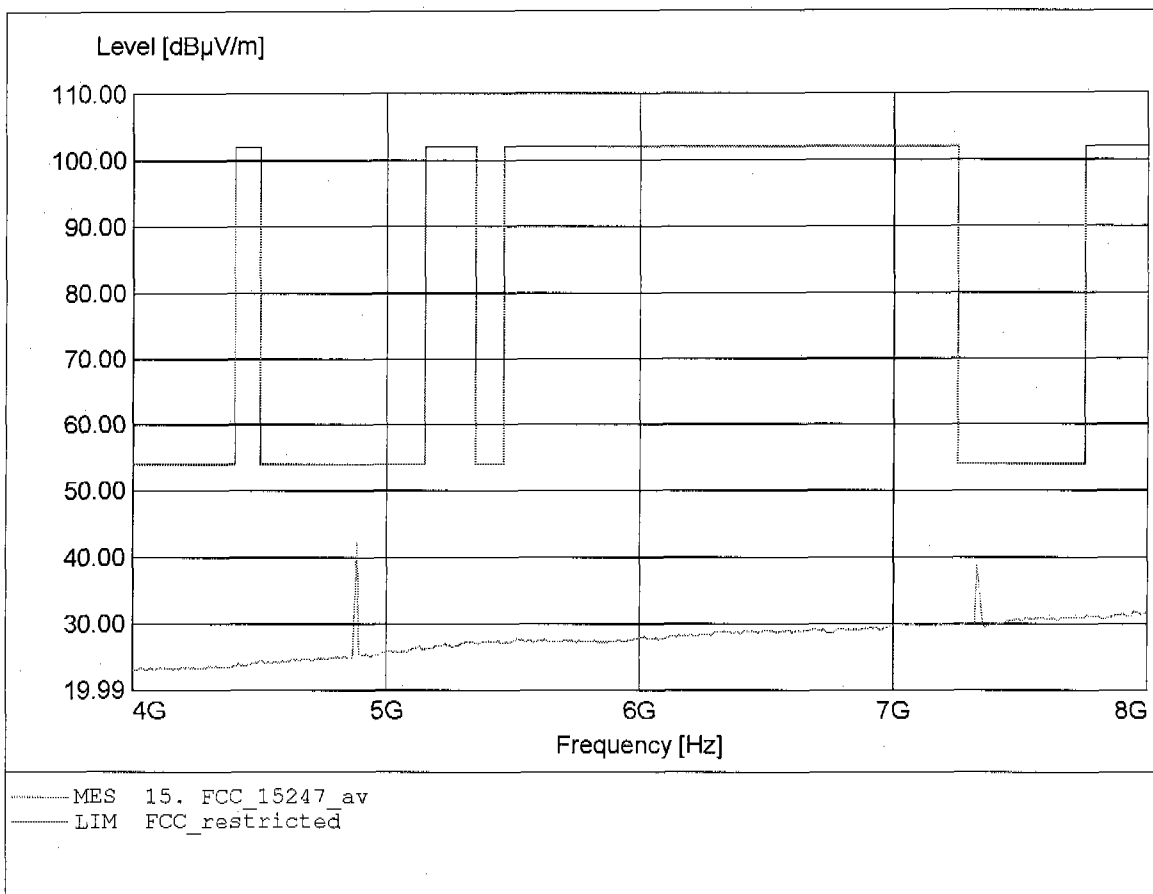


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 47
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 65.75dBµV/m, RBW: 1MHz

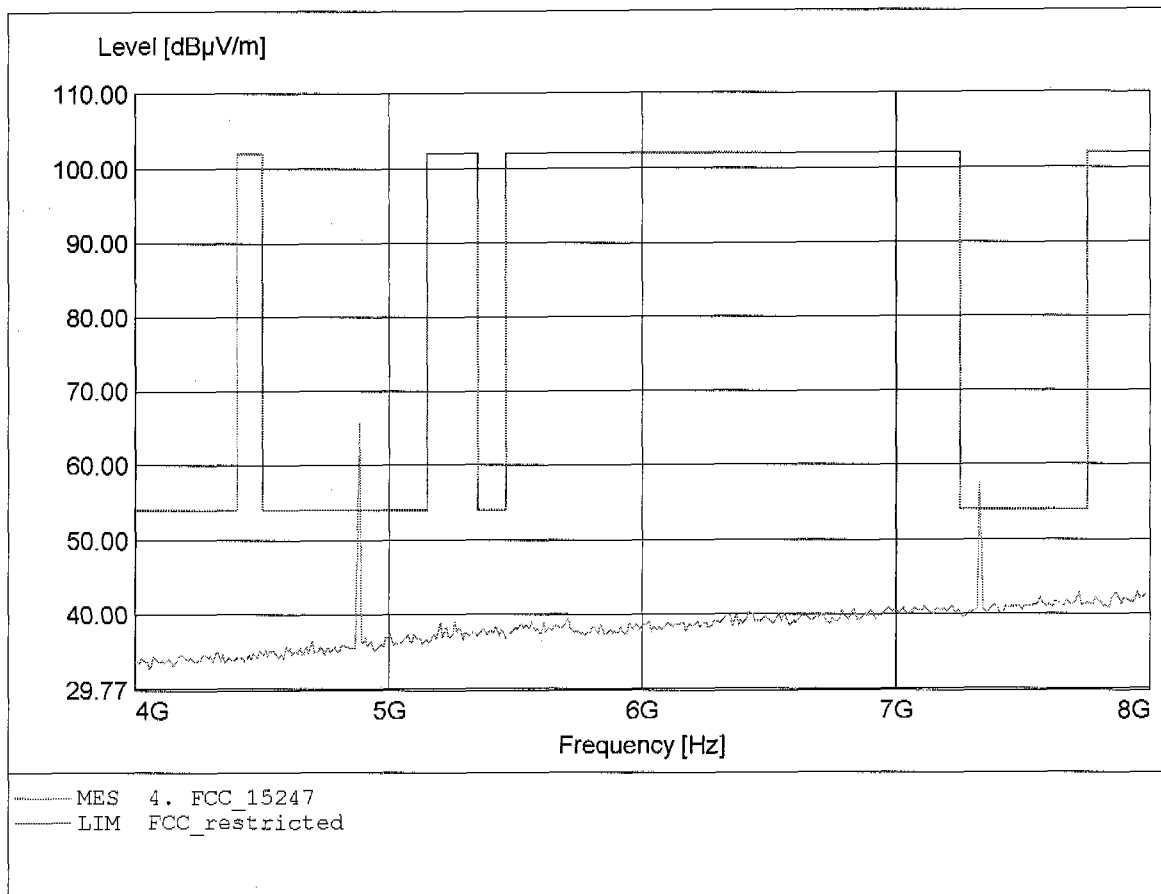


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 47
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 41.10dBµV/m, RBW: 1MHz

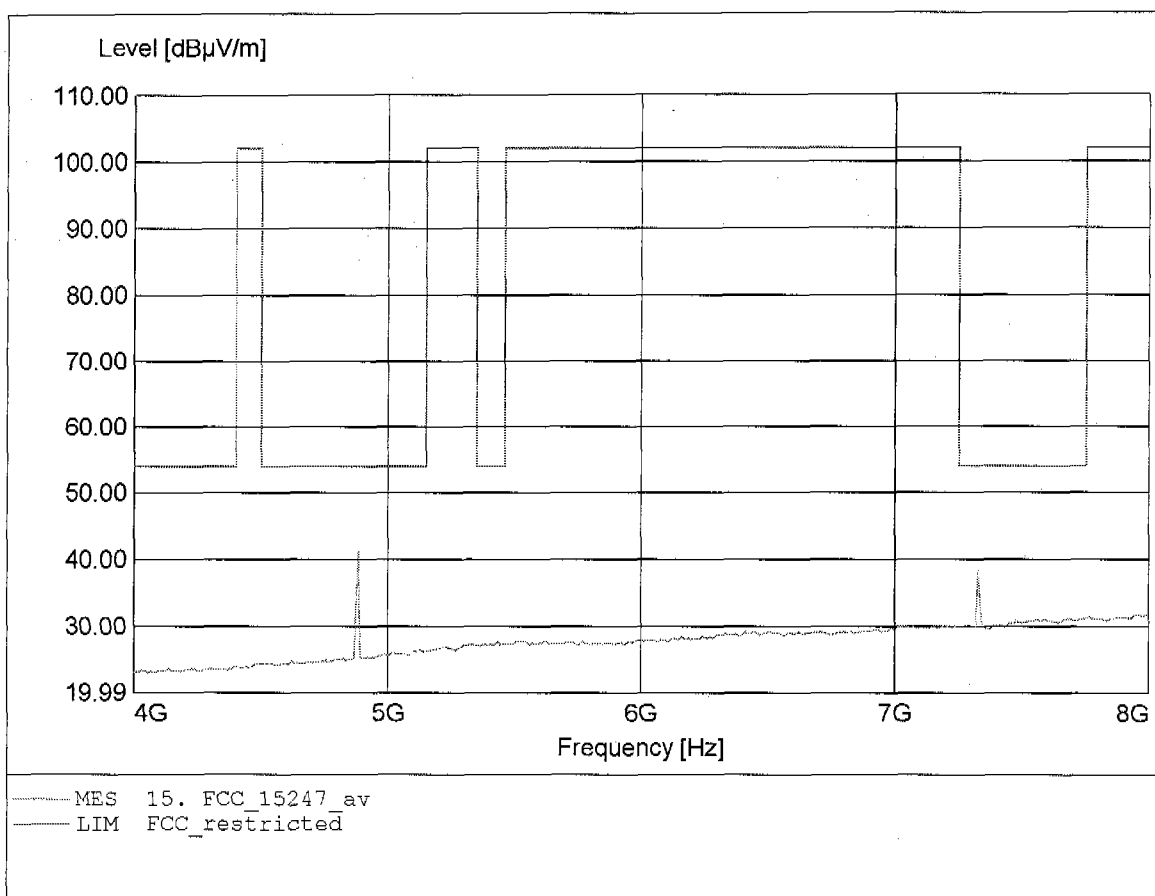


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 4.962GHz, Emax: 69.59dBµV/m, RBW: 1MHz

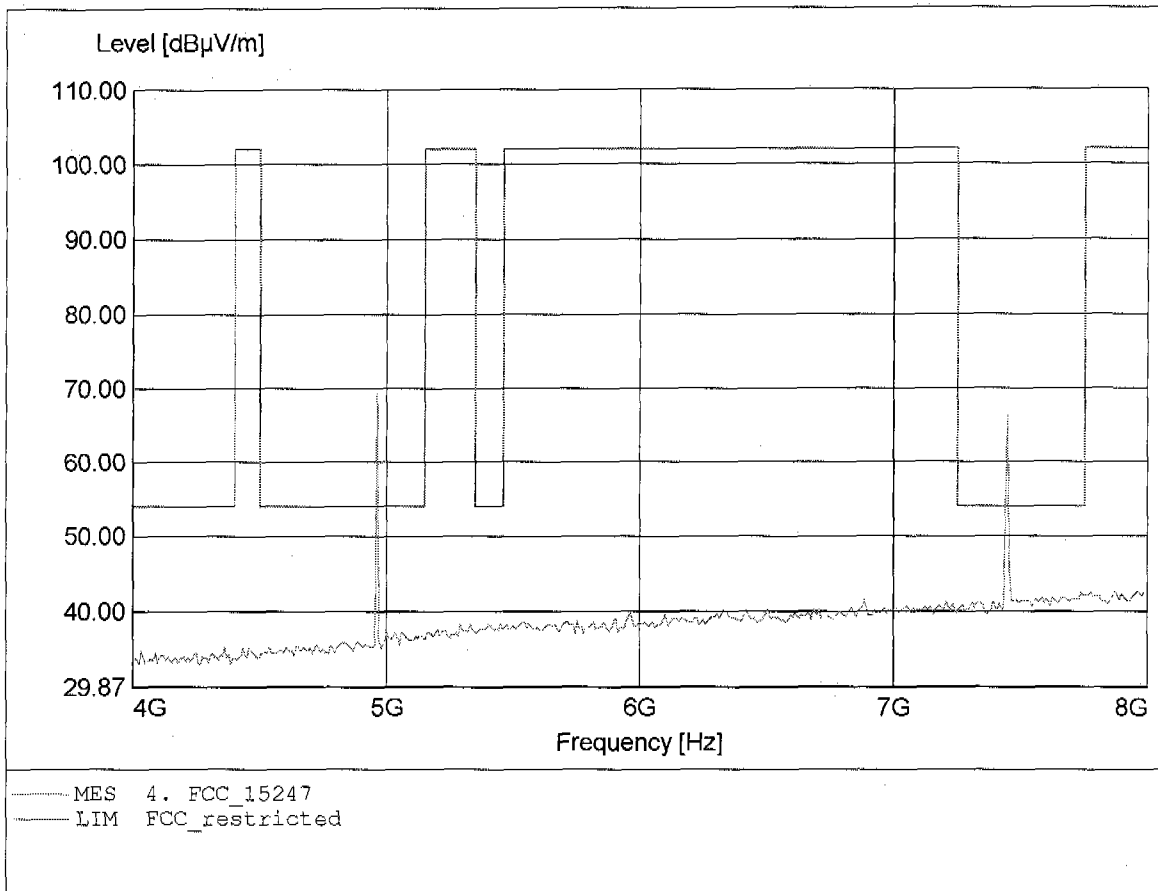


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 4.962GHz, Emax: 46.41dBµV/m, RBW: 1MHz

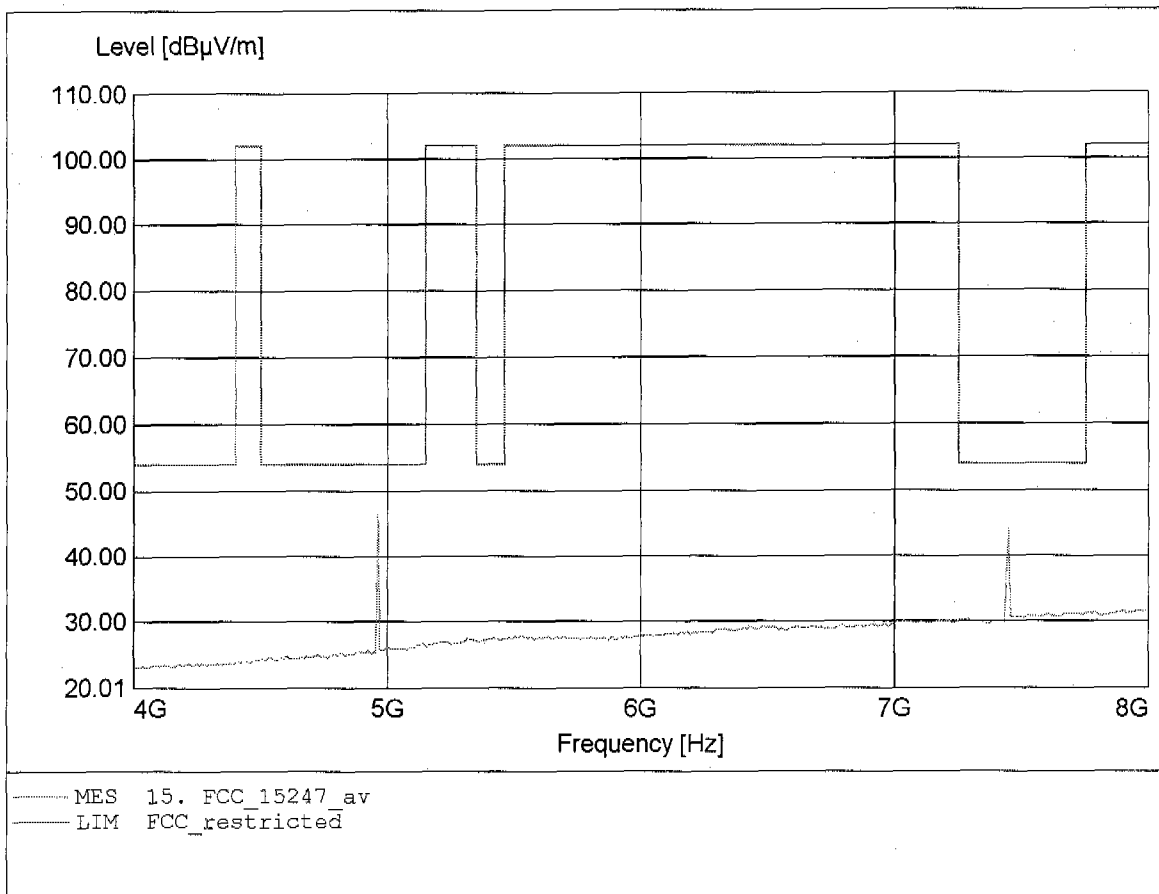


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 4.962GHz, Emax: 66.62dBµV/m, RBW: 1MHz

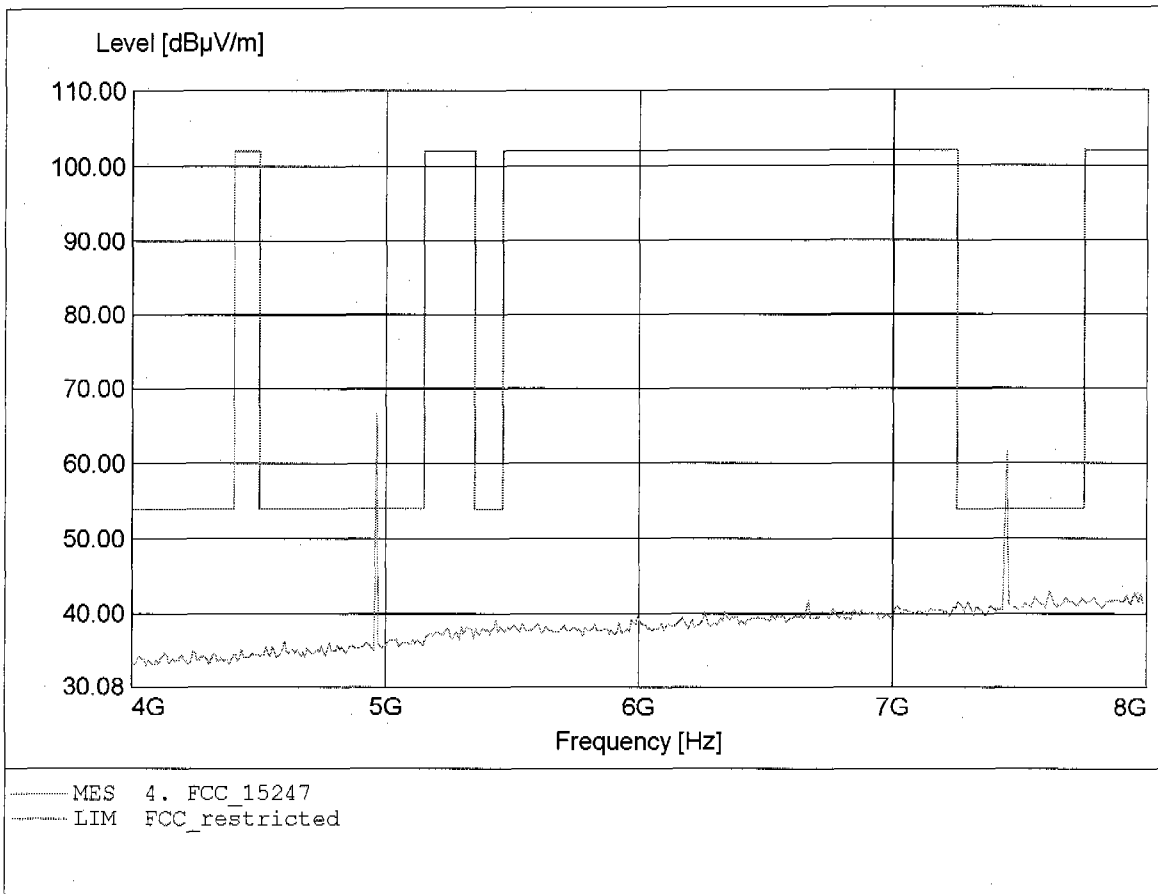


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.447GHz, Emax: 43.14dBµV/m, RBW: 1MHz

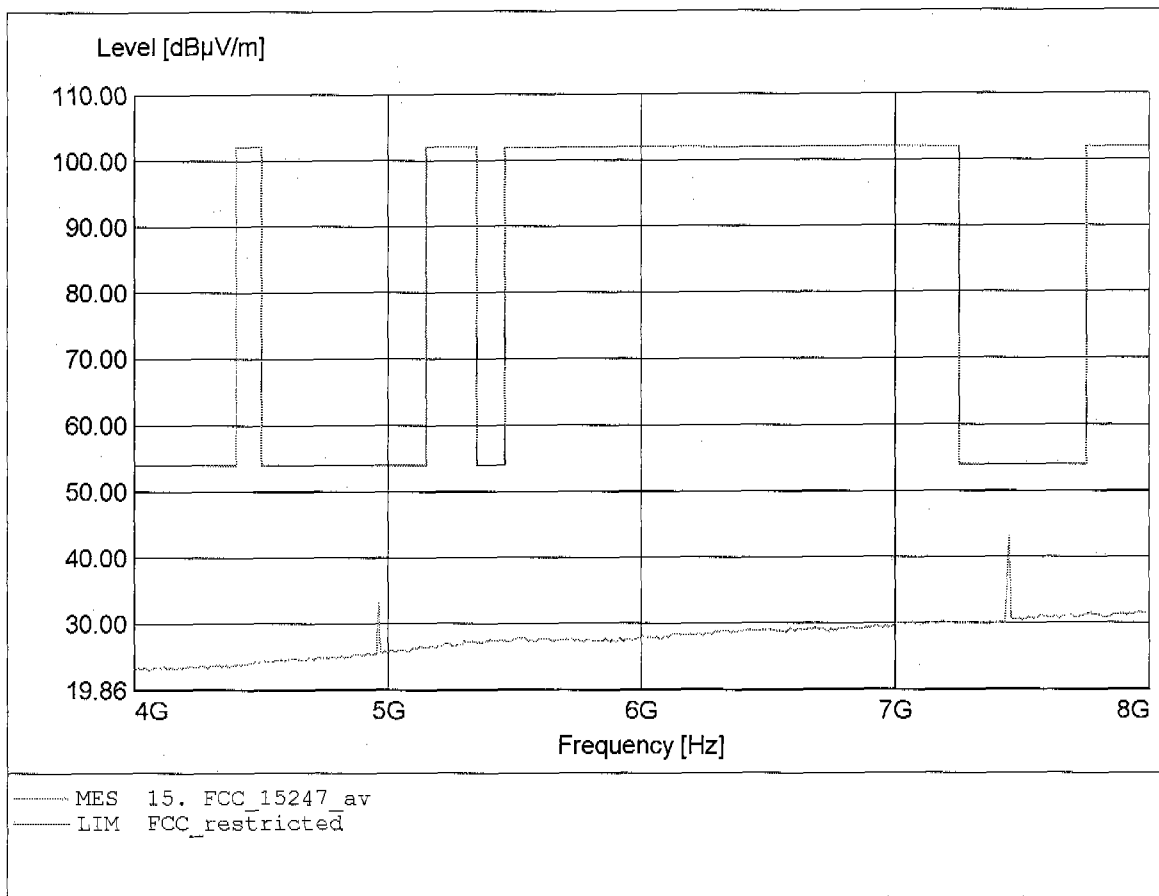


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.603GHz, Emax: 50.59dBµV/m, RBW: 1MHz

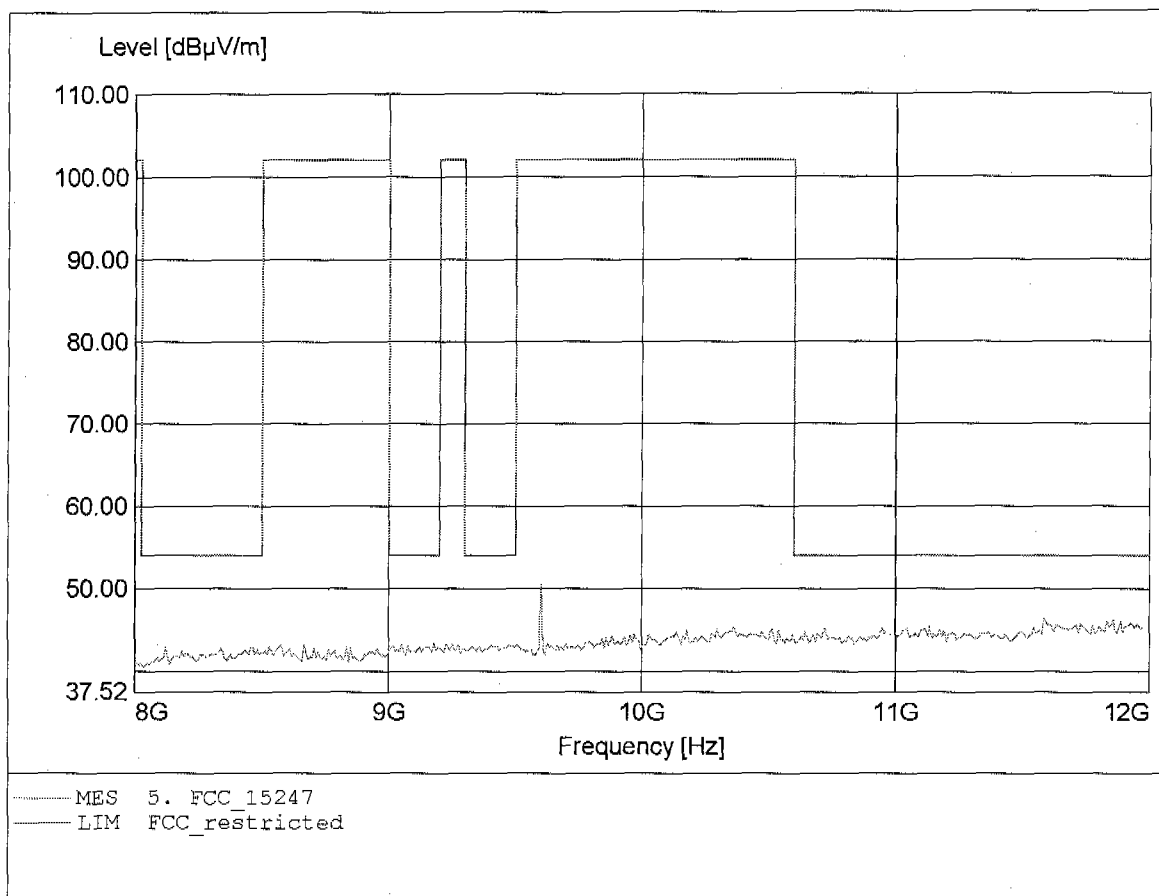


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.603GHz, Emax: 60.03dBµV/m, RBW: 1MHz

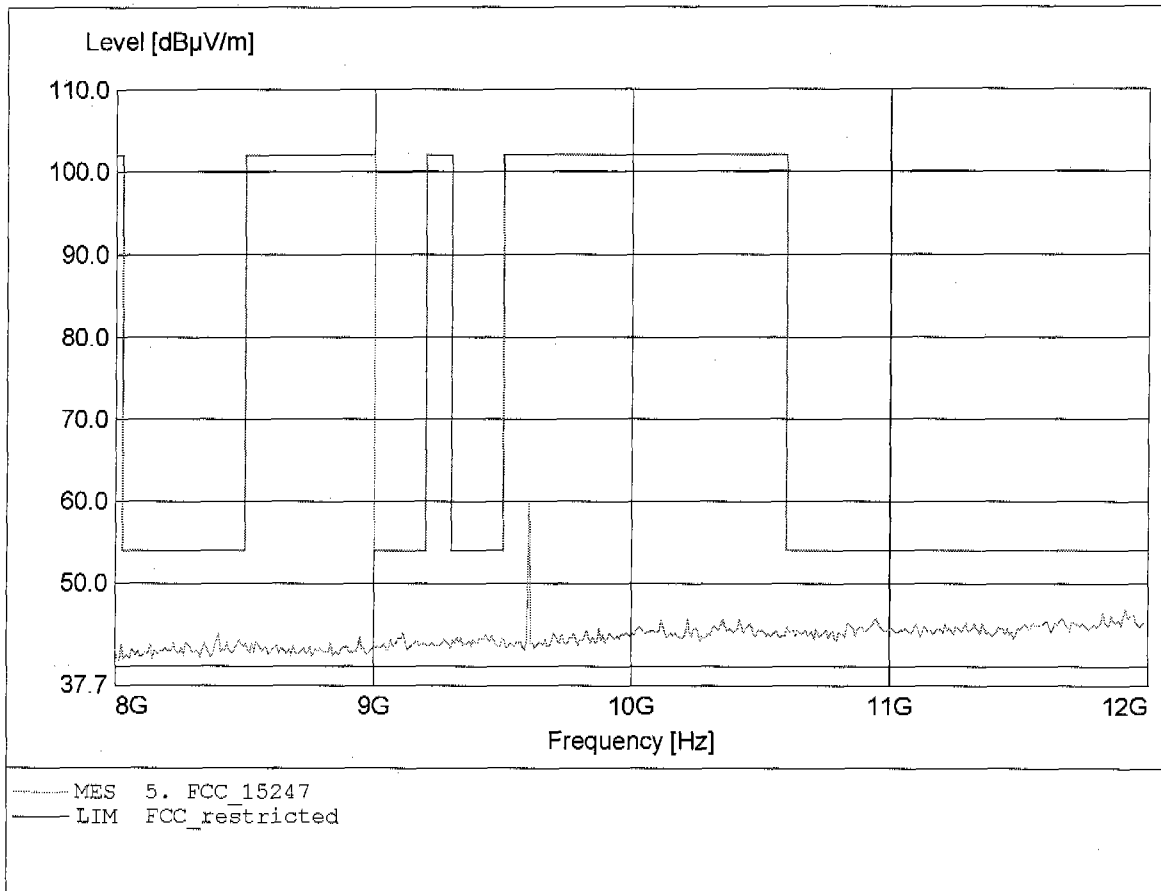


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 47
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.764GHz, Emax: 54.66dBµV/m, RBW: 1MHz

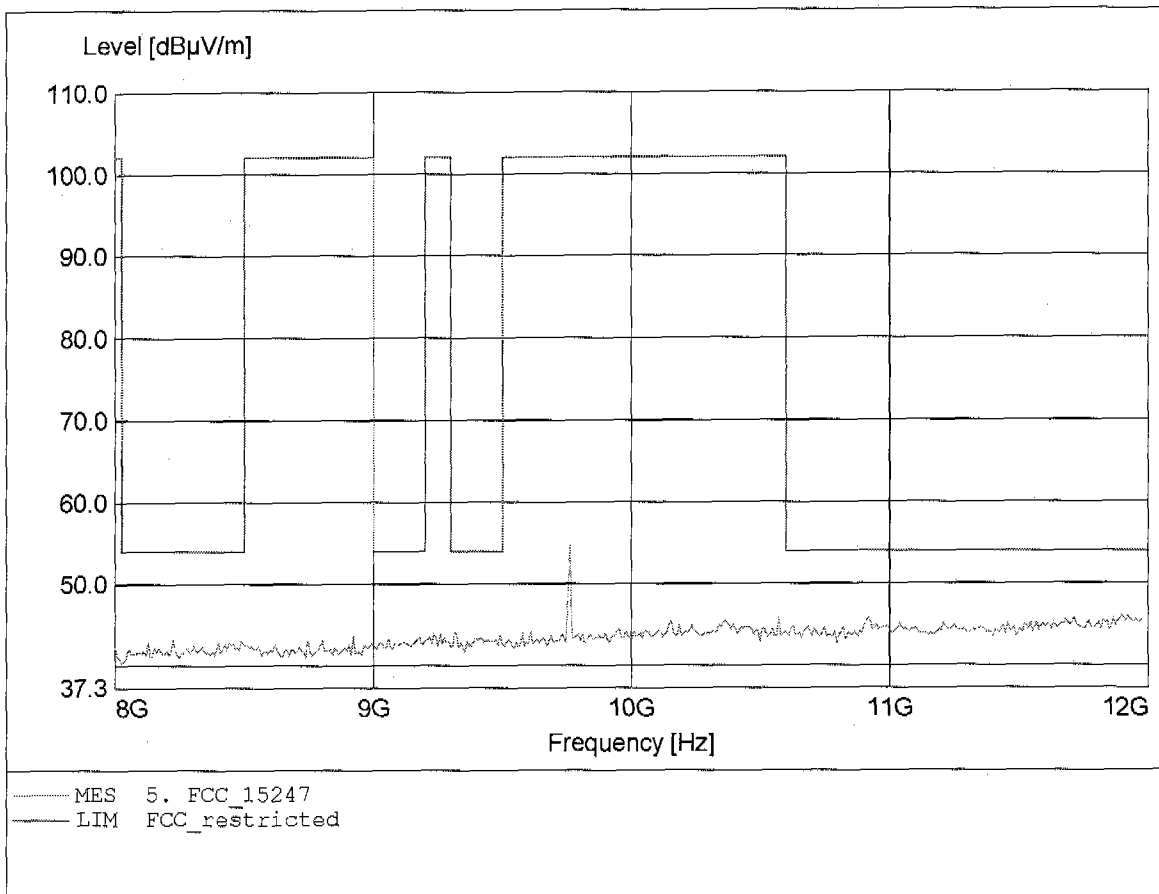


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 47
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.764GHz, Emax: 63.82dBµV/m, RBW: 1MHz

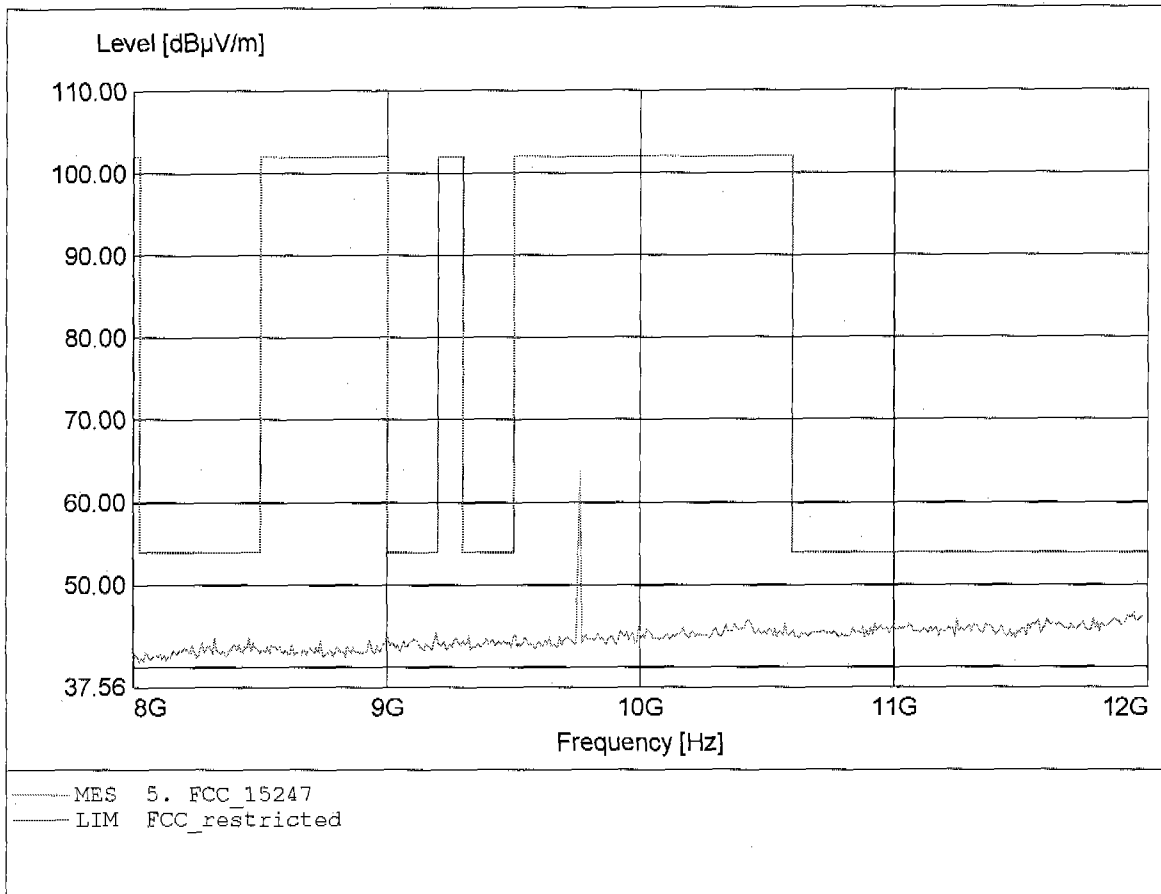


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.932GHz, Emax: 56.00dBµV/m, RBW: 1MHz

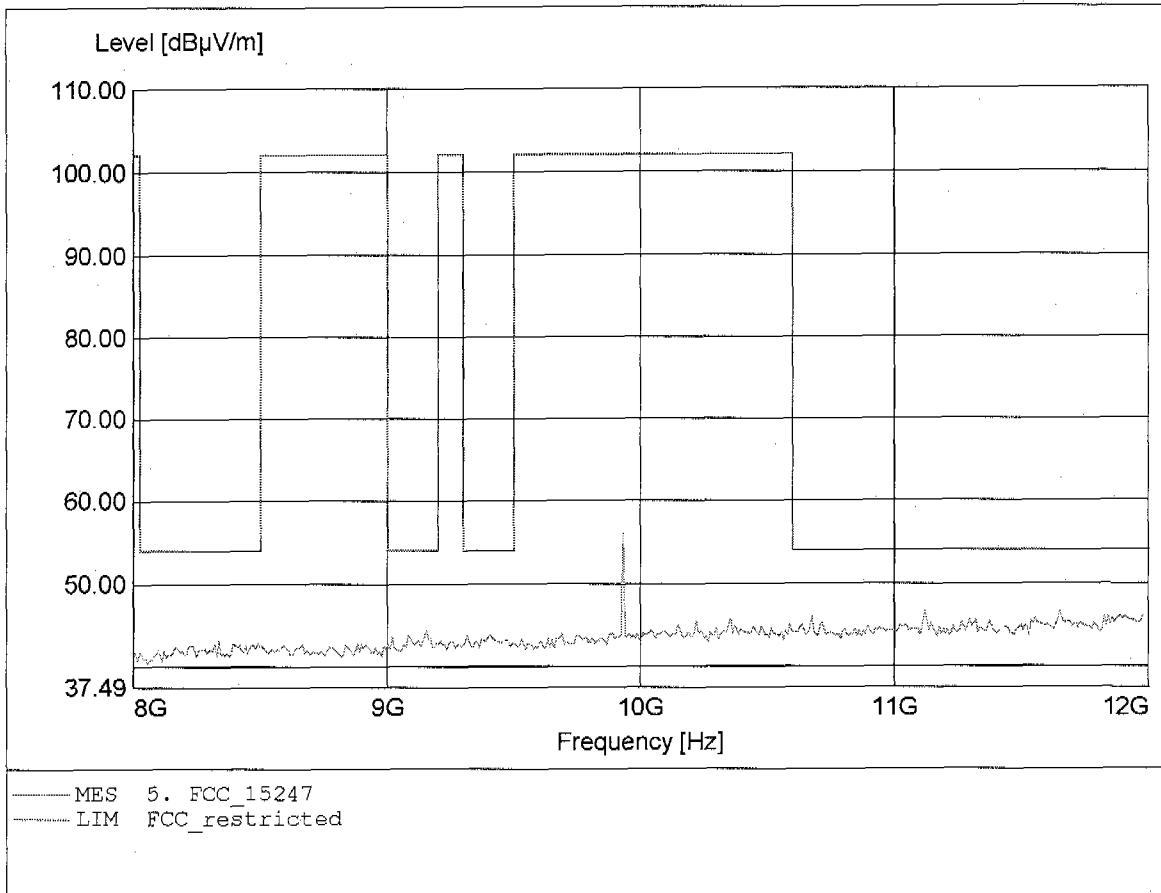


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.932GHz, Emax: 60.33dBµV/m, RBW: 1MHz

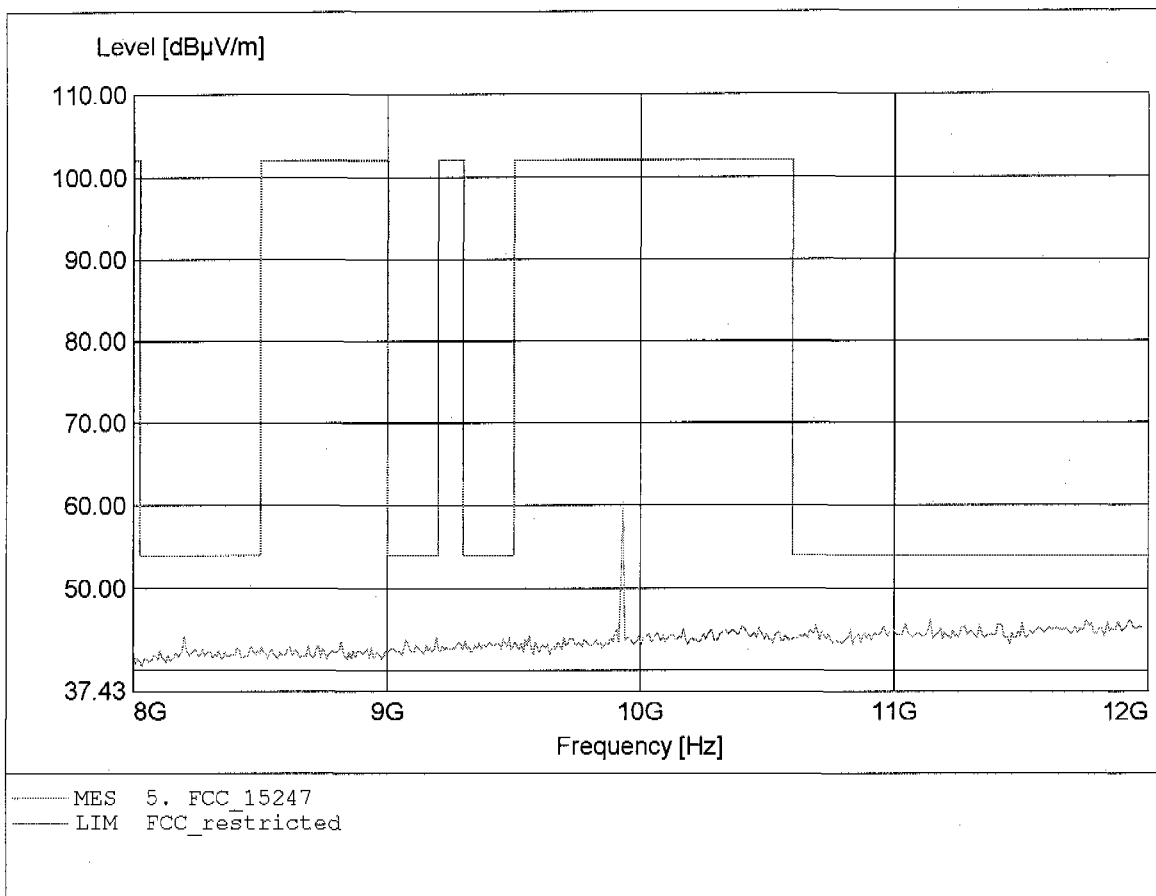


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.363GHz, Emax: 51.56dBµV/m, RBW: 1MHz

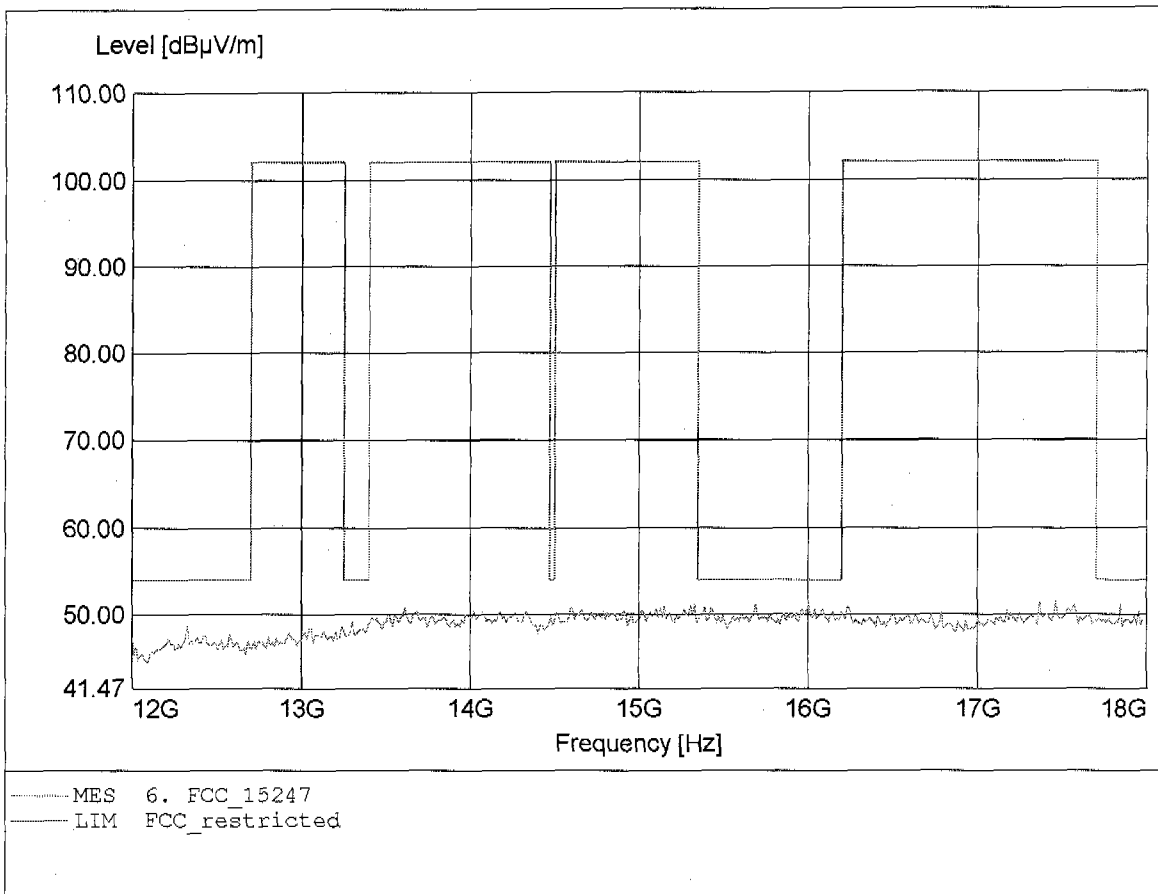


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 14.405GHz, Emax: 57.68dBµV/m, RBW: 1MHz

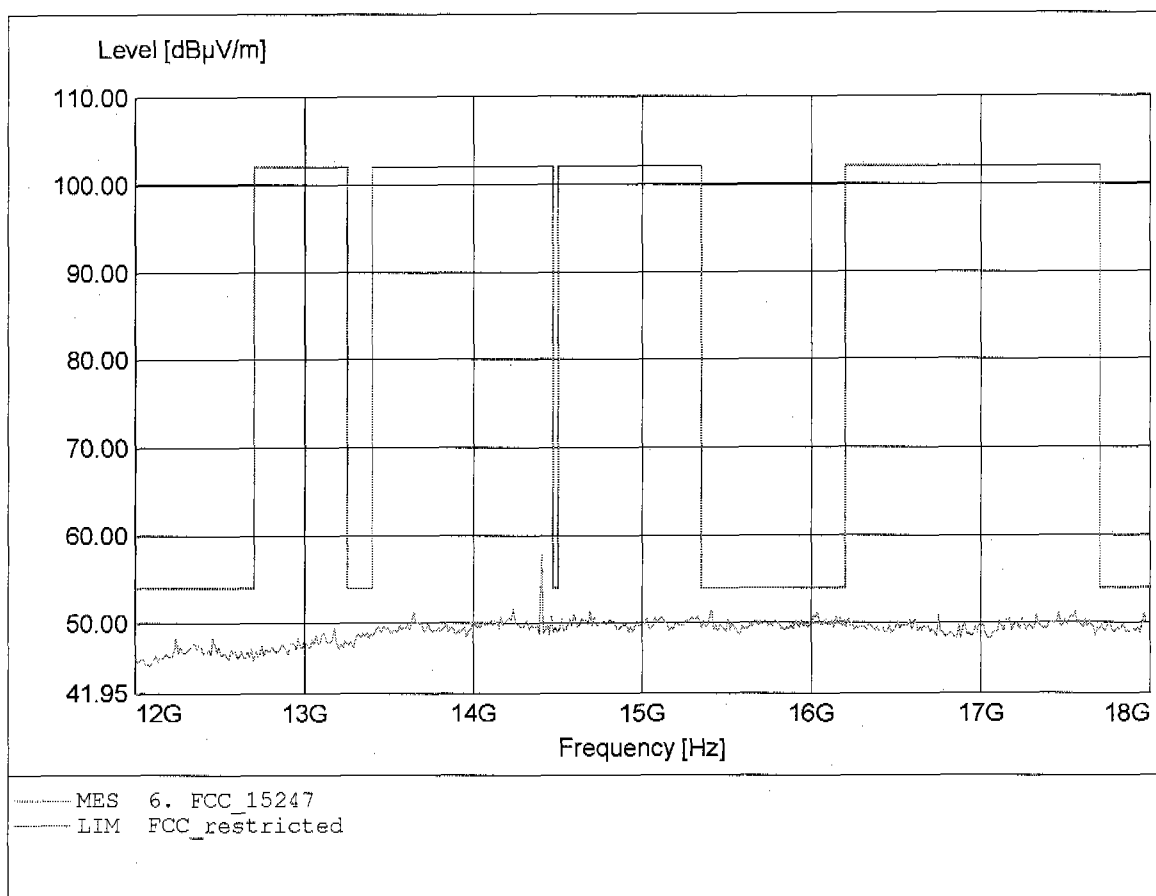


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 47
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 14.032GHz, Emax: 51.91dBµV/m, RBW: 1MHz

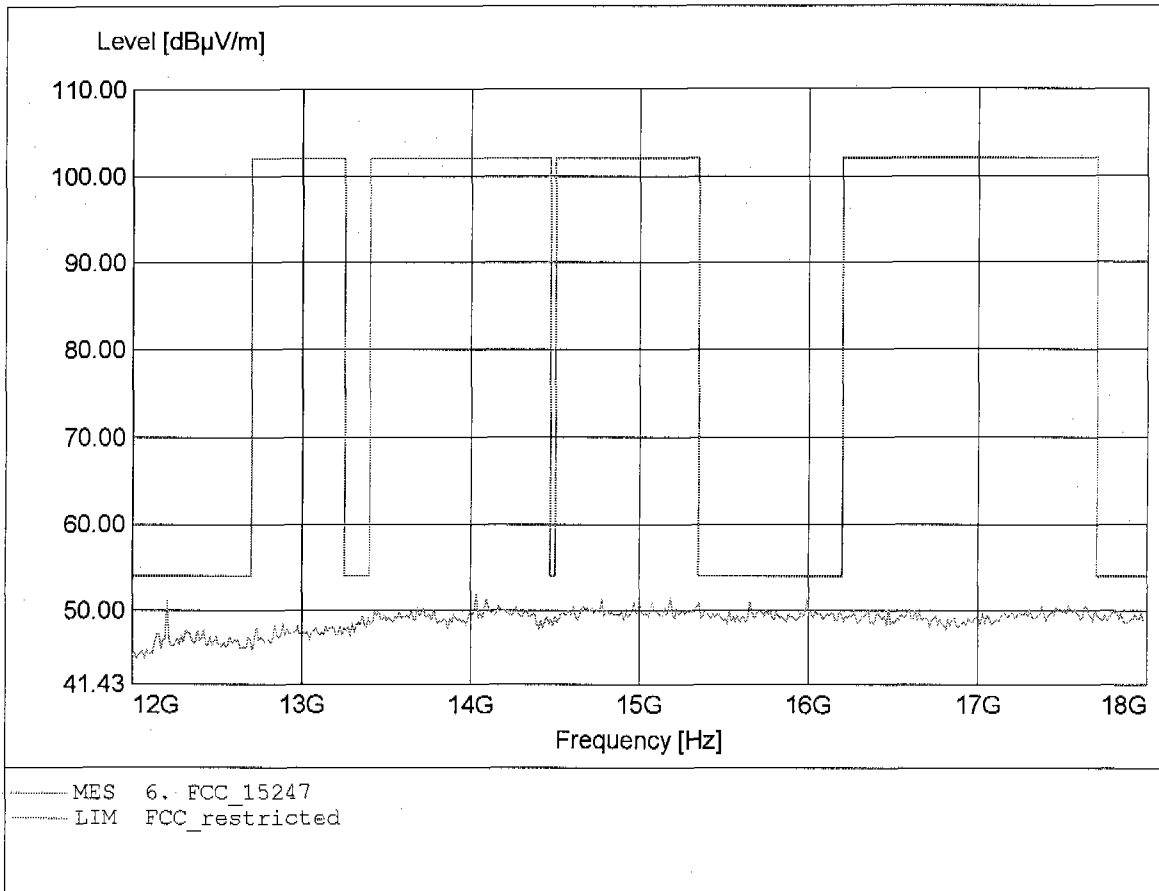


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 47
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 14.645GHz, Emax: 58.25dBµV/m, RBW: 1MHz

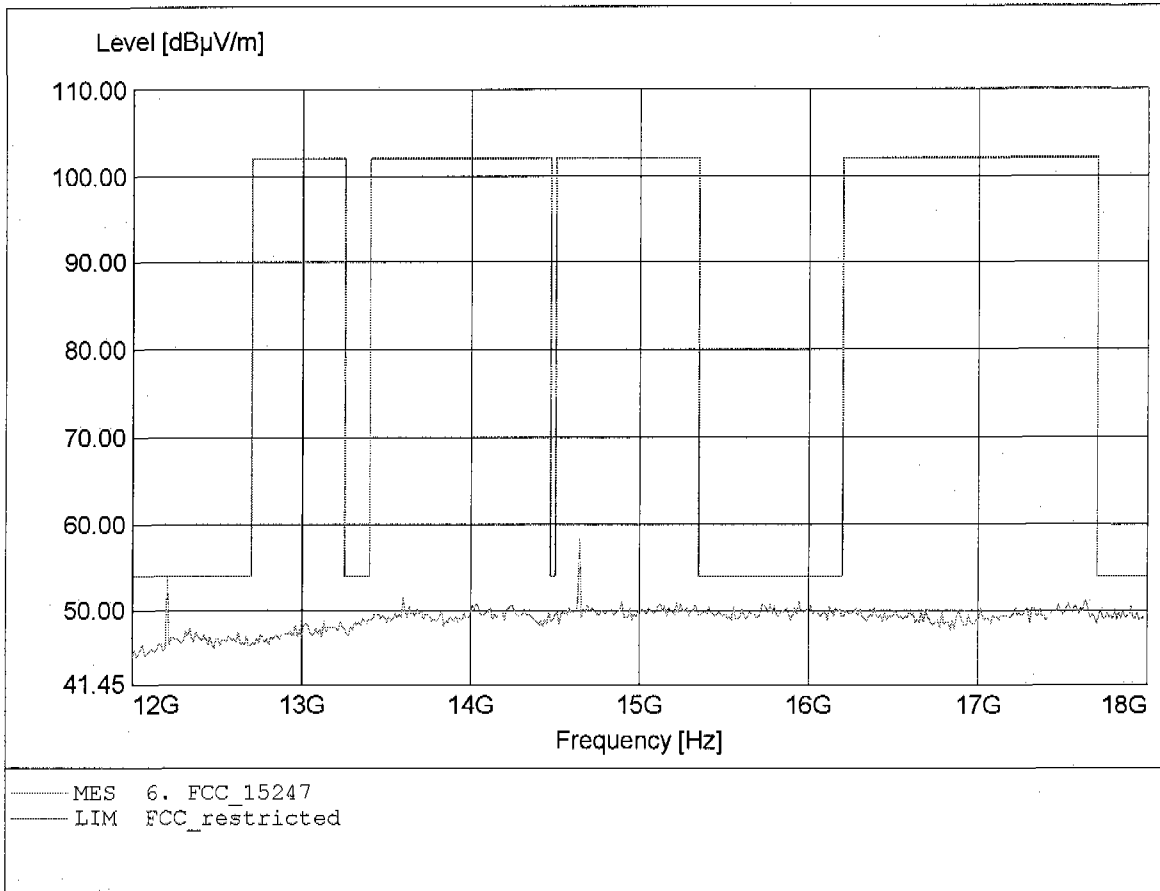


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
 EUT: Cordless Headset / Remote Beltpack
 Model: GN Ellipse / Ant.: 1 / Ch.: 47
 Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
 Test Site / Operator: ETS / Mr. Handrik
 Test Specification: according to §15.247, peak detector
 Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
 Comment 2: Freq: 14.645GHz, Emax: 58.25dBµV/m, RBW: 1MHz

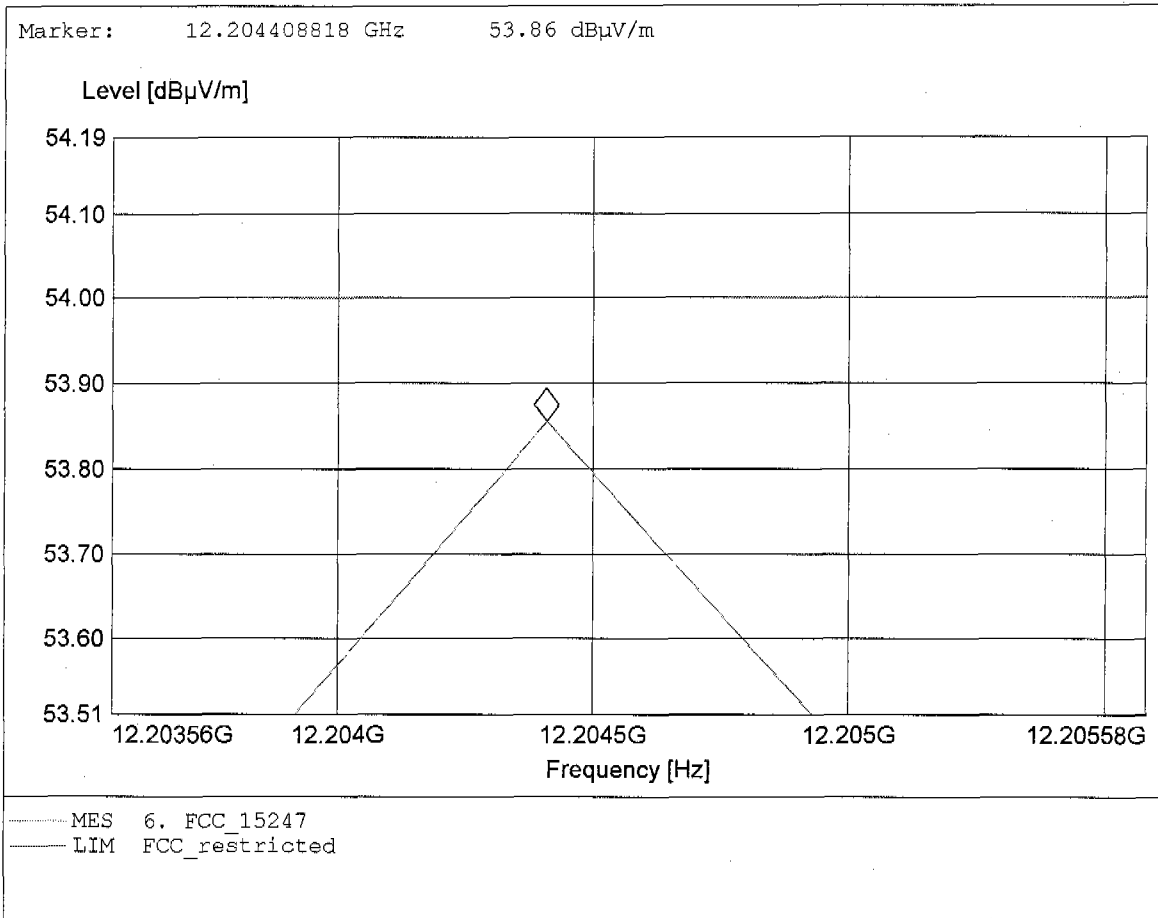


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.531GHz, Emax: 51.04dBµV/m, RBW: 1MHz

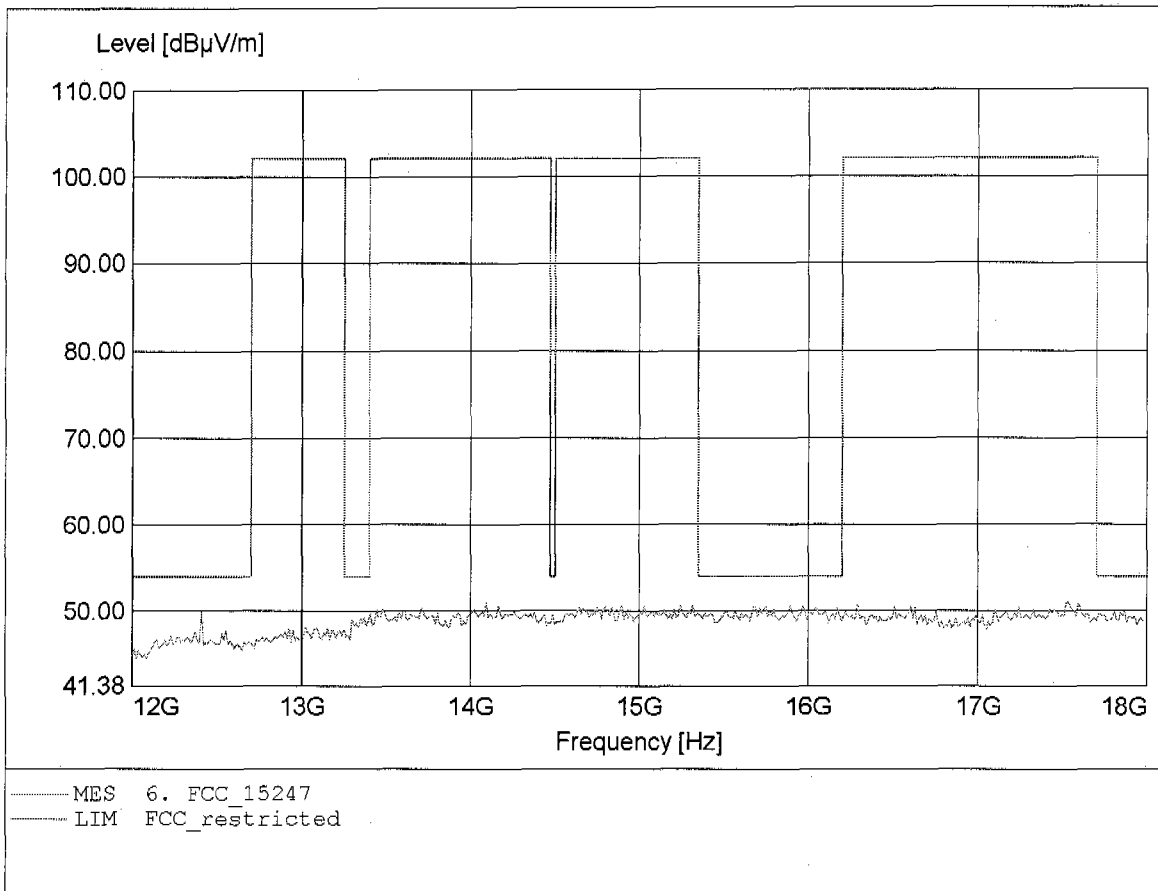


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 14.898GHz, Emax: 55.74dBµV/m, RBW: 1MHz

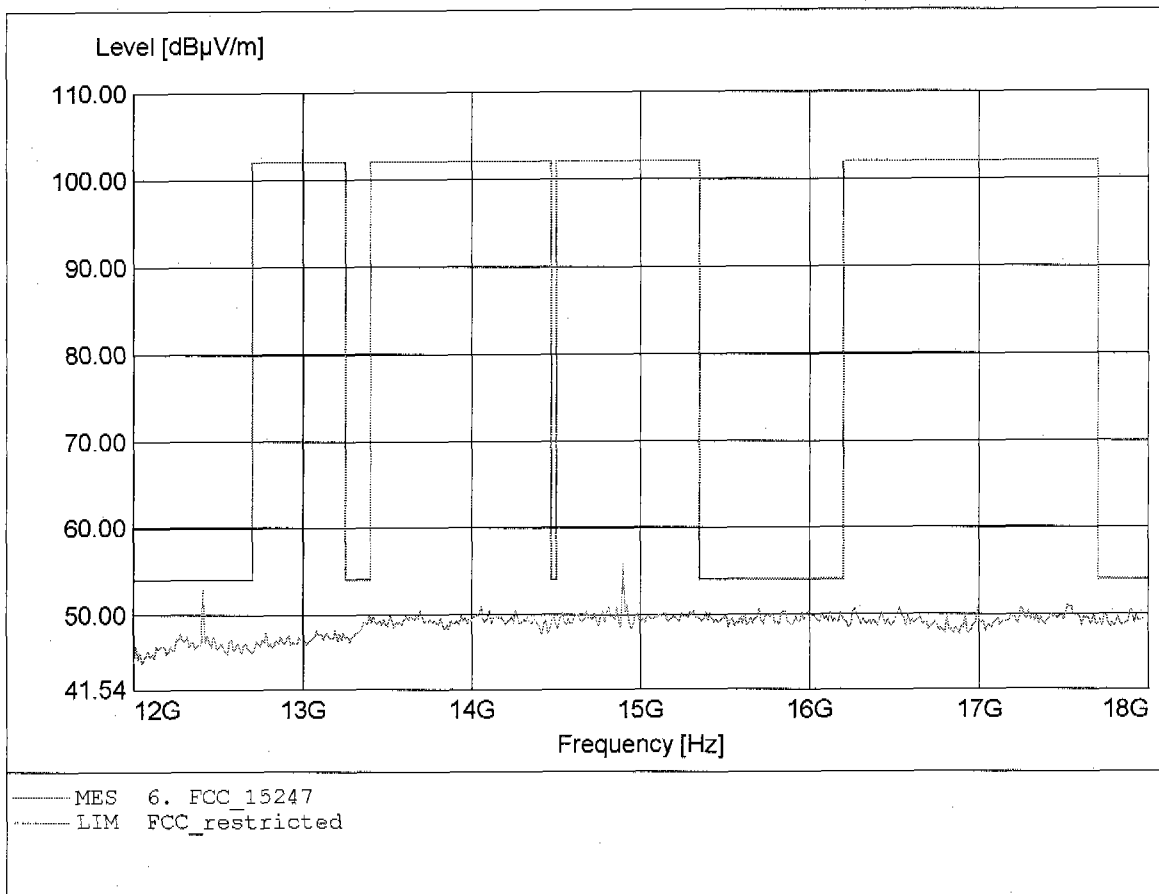


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 20.197GHz, Emax: 48.41dBµV/m, RBW: 1MHz

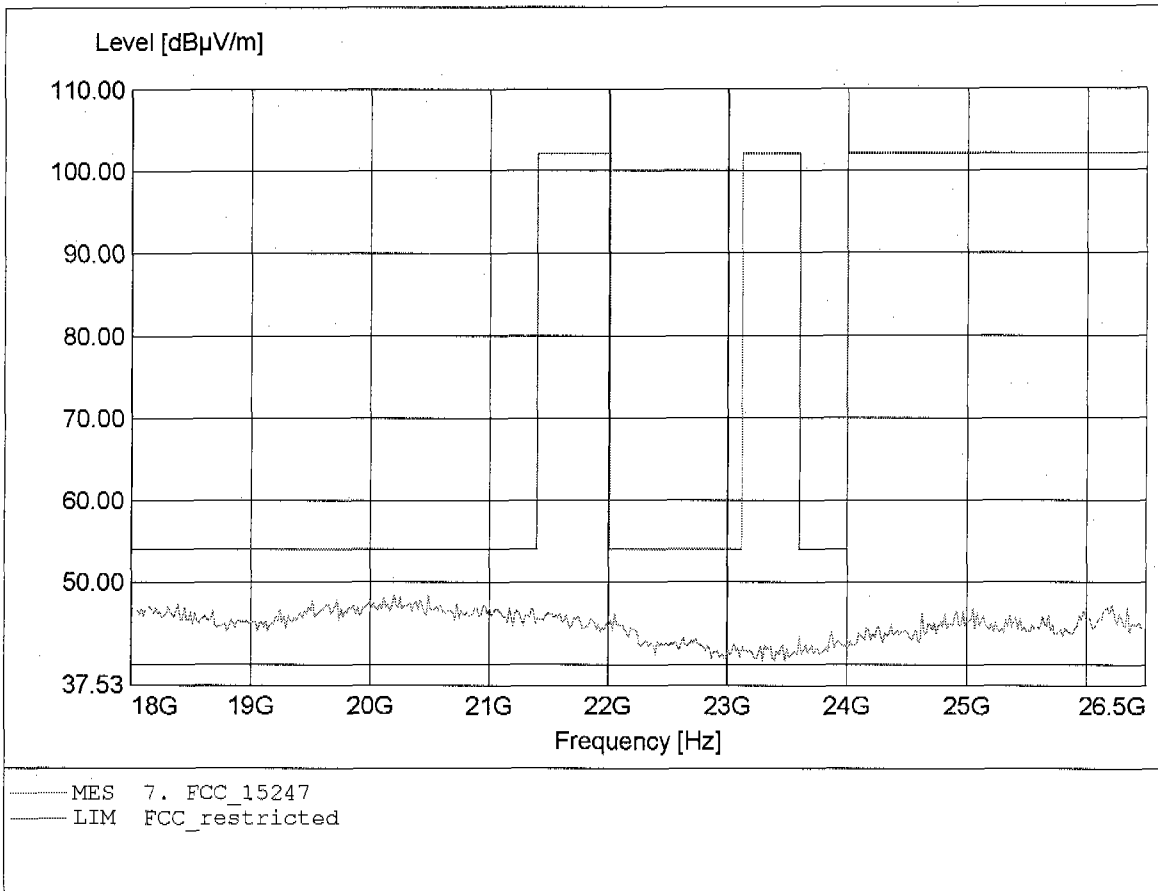


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 19.482GHz, Emax: 49.66dBµV/m, RBW: 1MHz

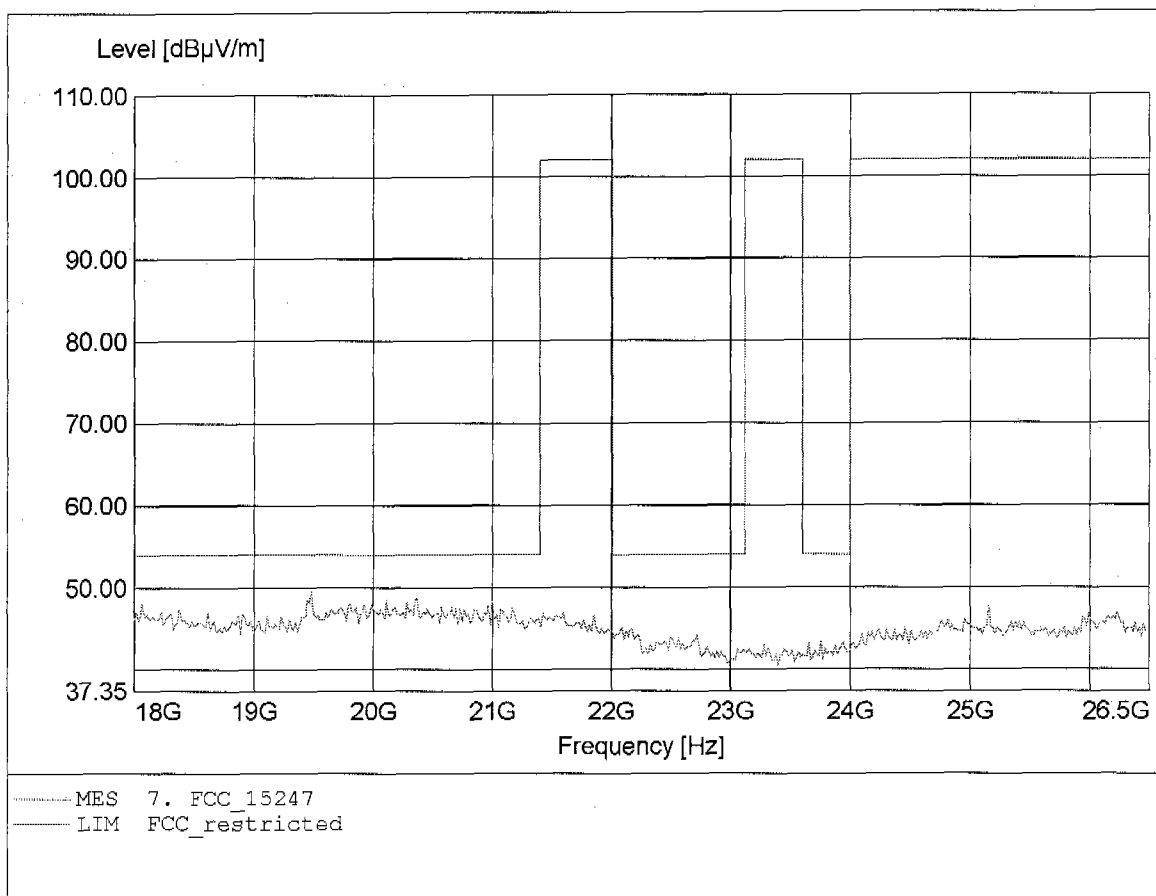


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 47
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 20.146GHz, Emax: 49.79dBµV/m, RBW: 1MHz

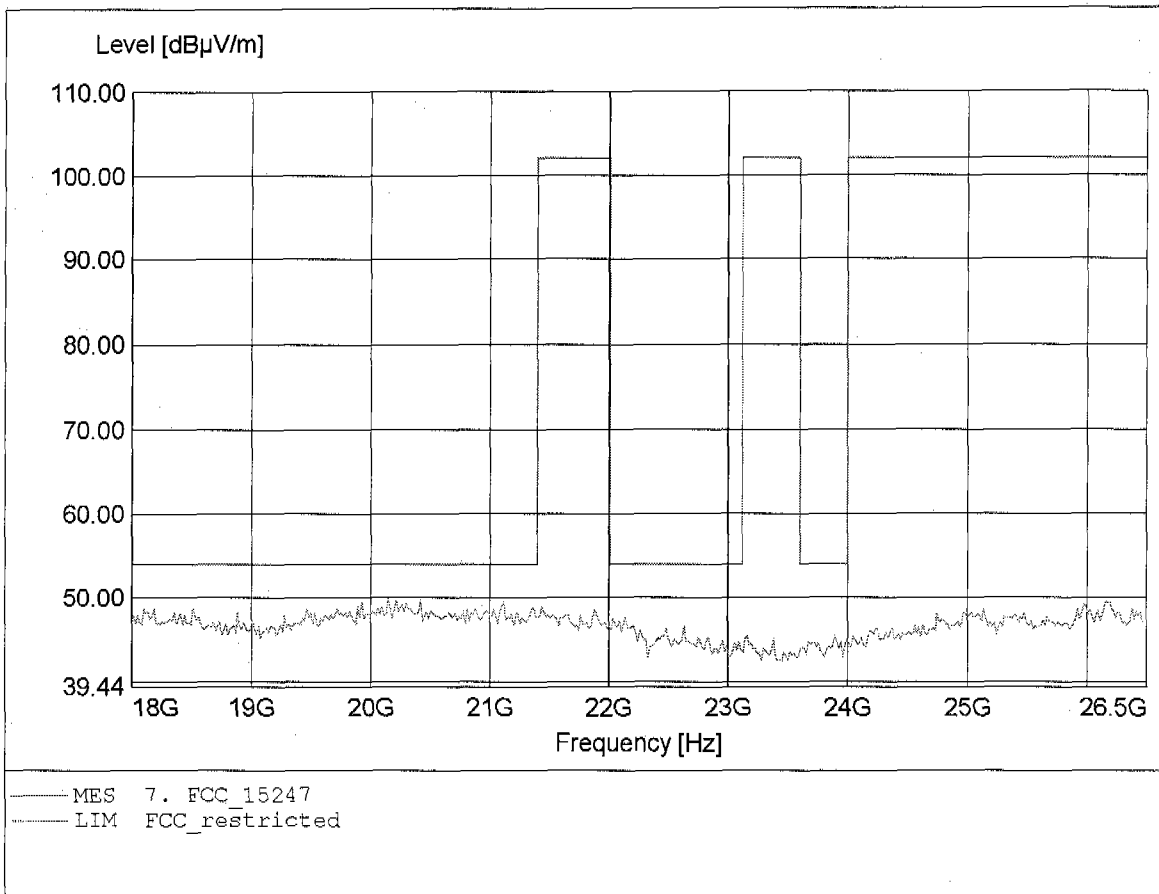


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 47
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 20.078GHz, Emax: 50.74dBµV/m, RBW: 1MHz

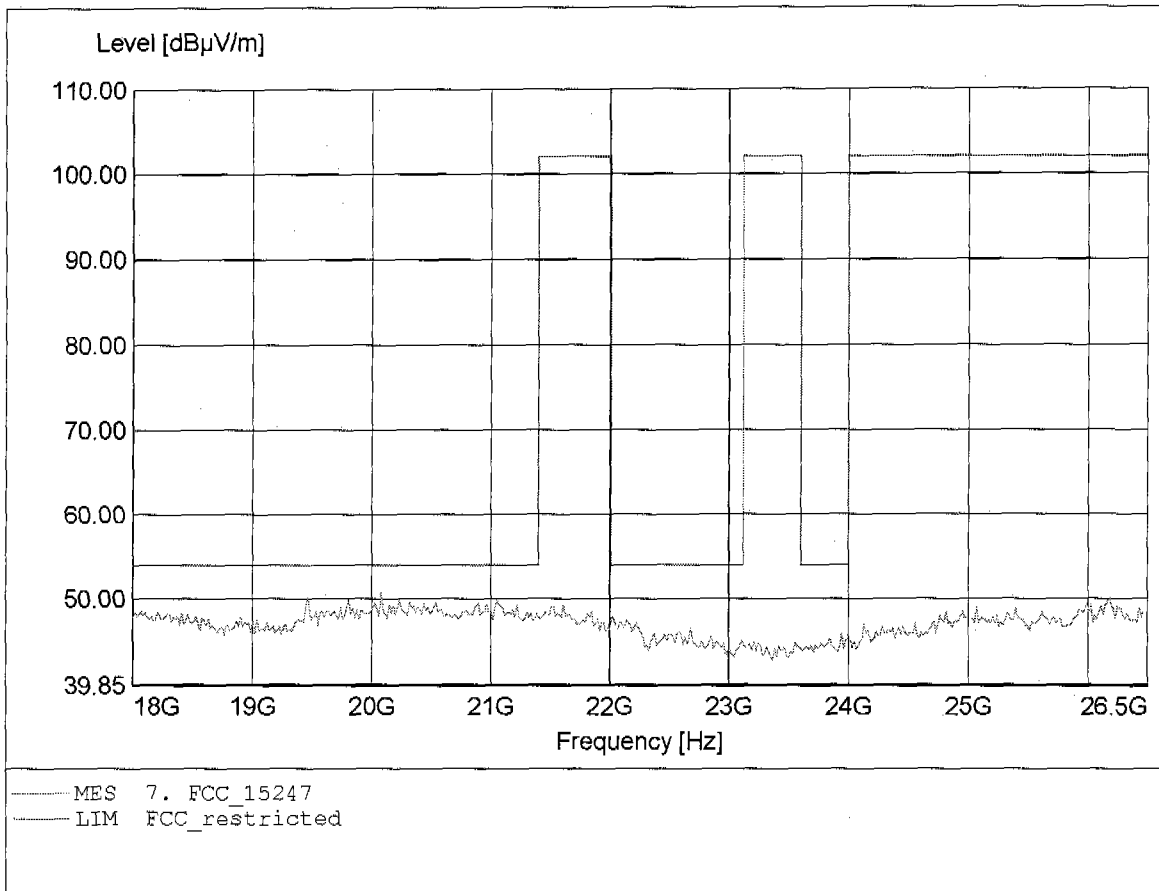

**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 20.044GHz, Emax: 50.38dBµV/m, RBW: 1MHz

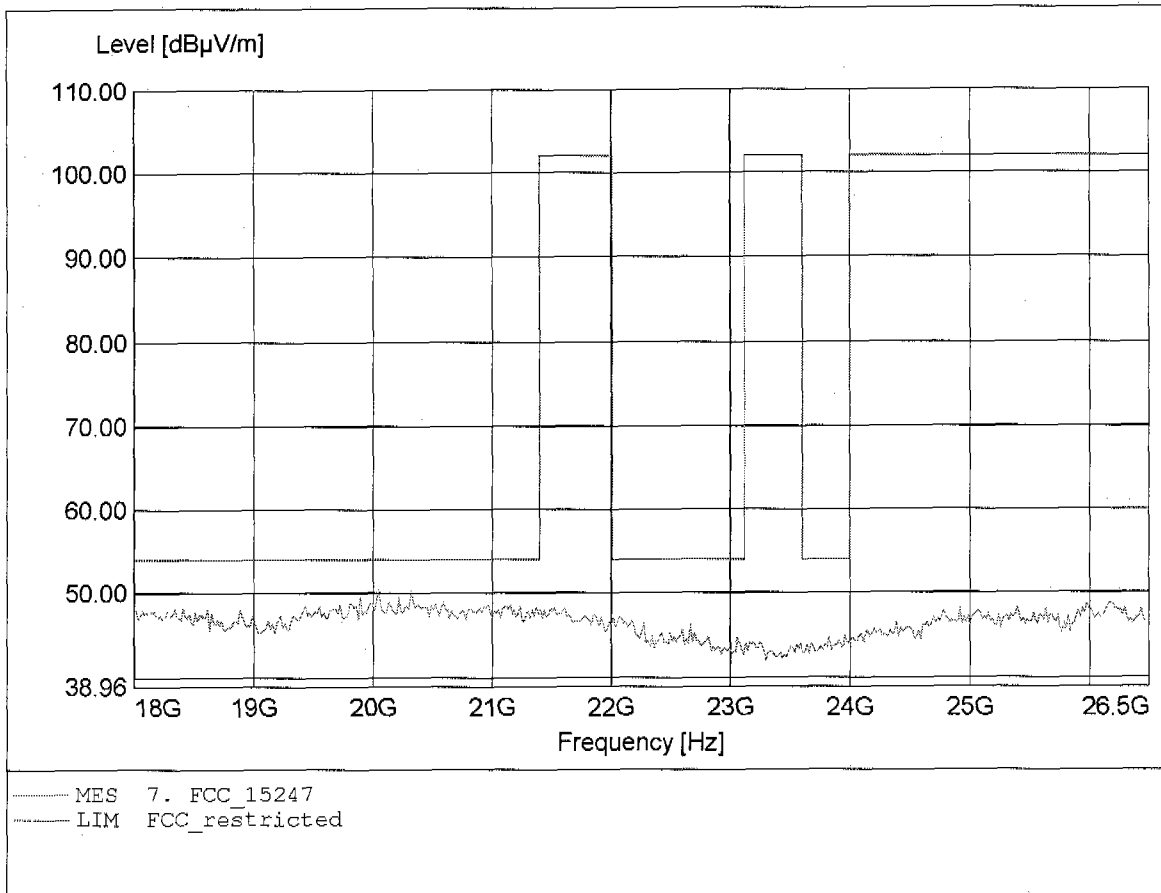

**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 1 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 25.955GHz, Emax: 43.84dBµV/m, RBW: 1MHz

