



**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 120.281MHz, Emax: 32.27dBµV/m, RBW: 100kHz

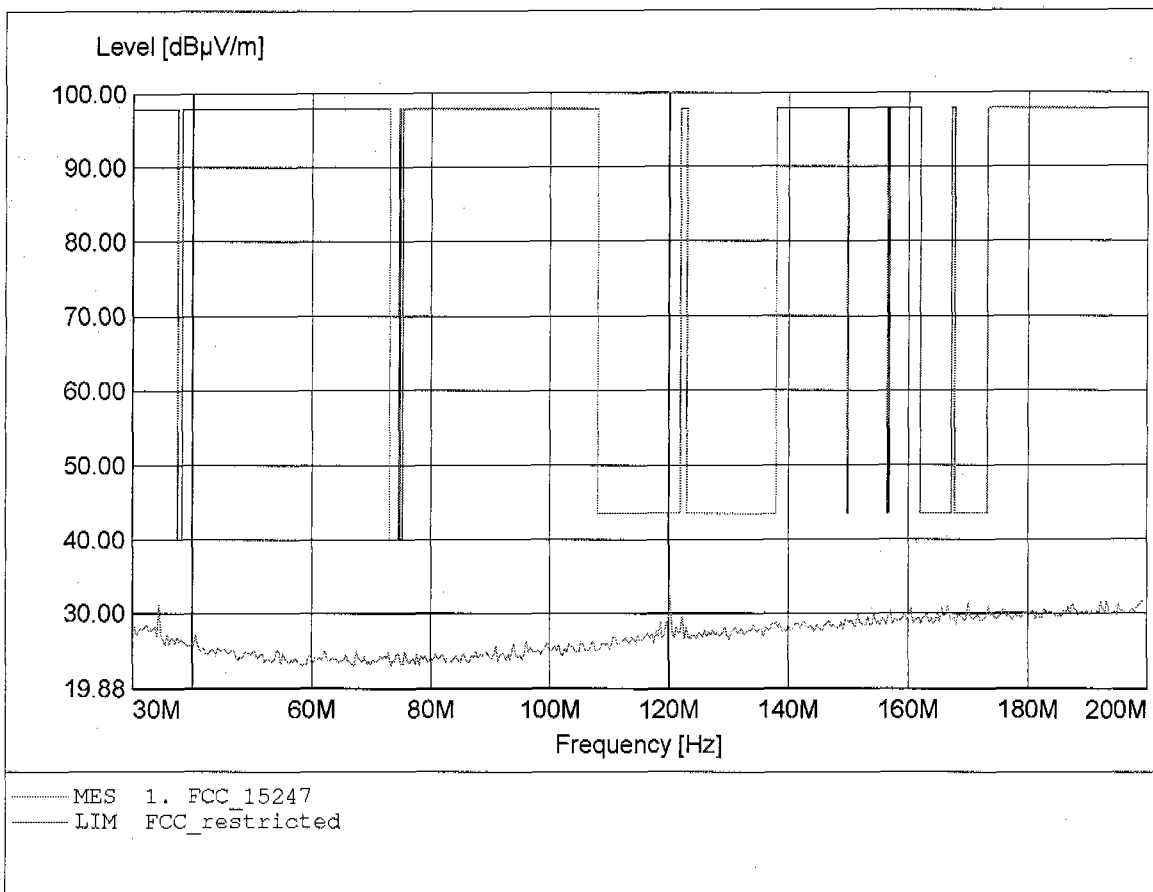


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 199.319MHz, Emax: 32.11dBµV/m, RBW: 100kHz

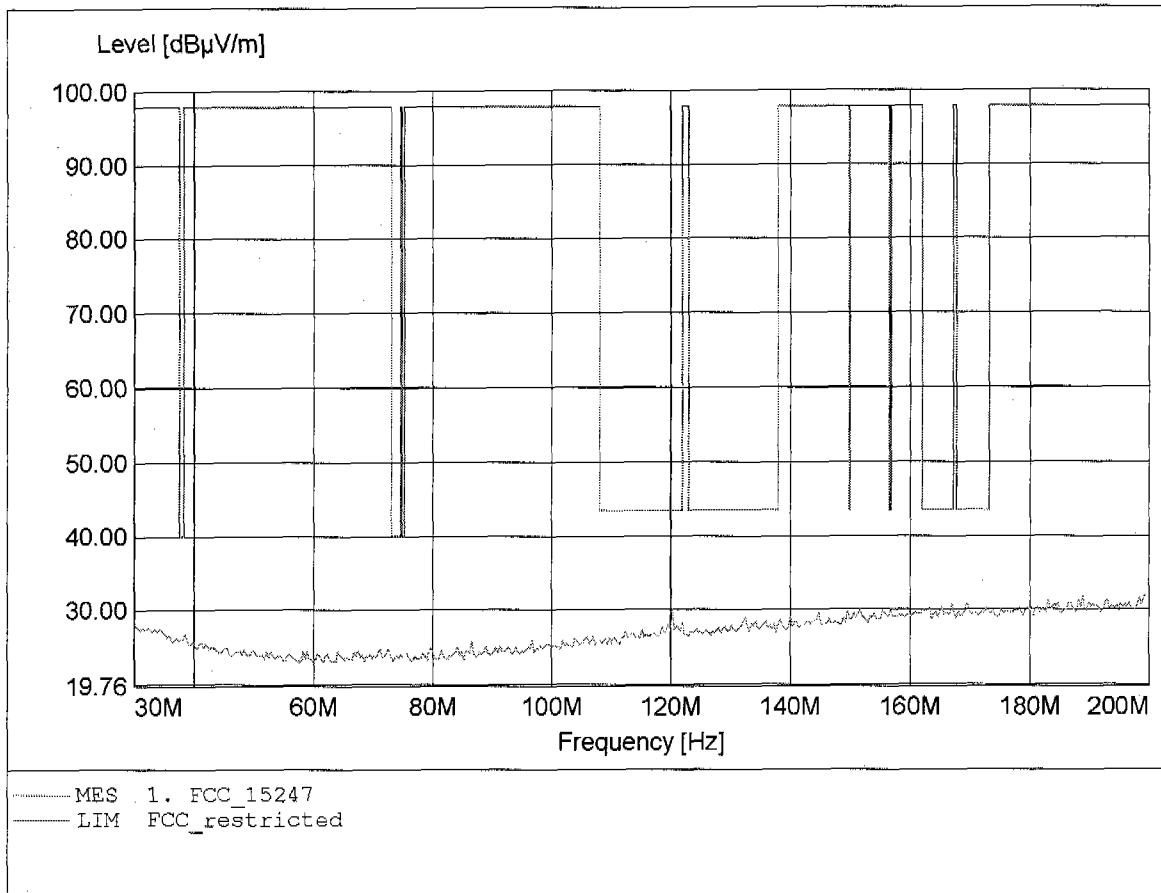


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 47
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 119.599MHz, Emax: 32.66dBµV/m, RBW: 100kHz

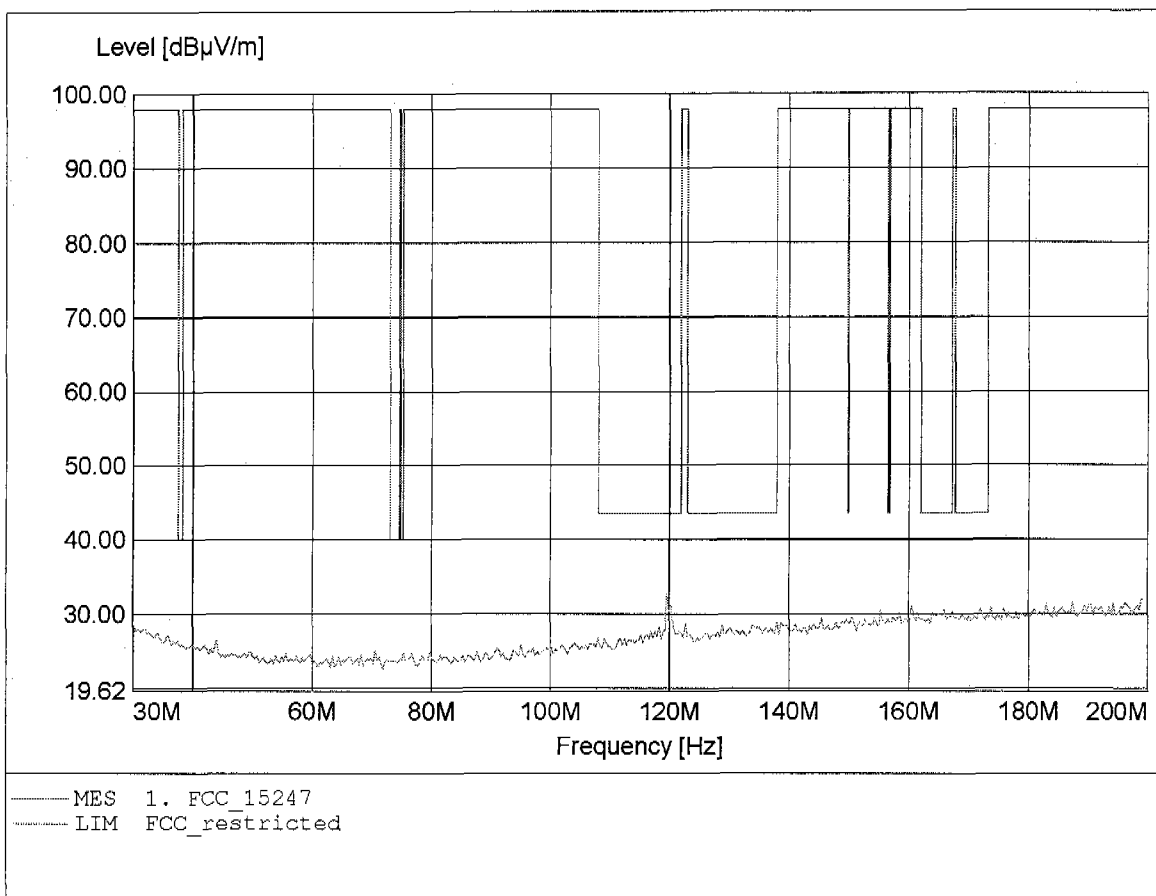


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 47
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 198.978MHz, Emax: 31.71dBµV/m, RBW: 100kHz

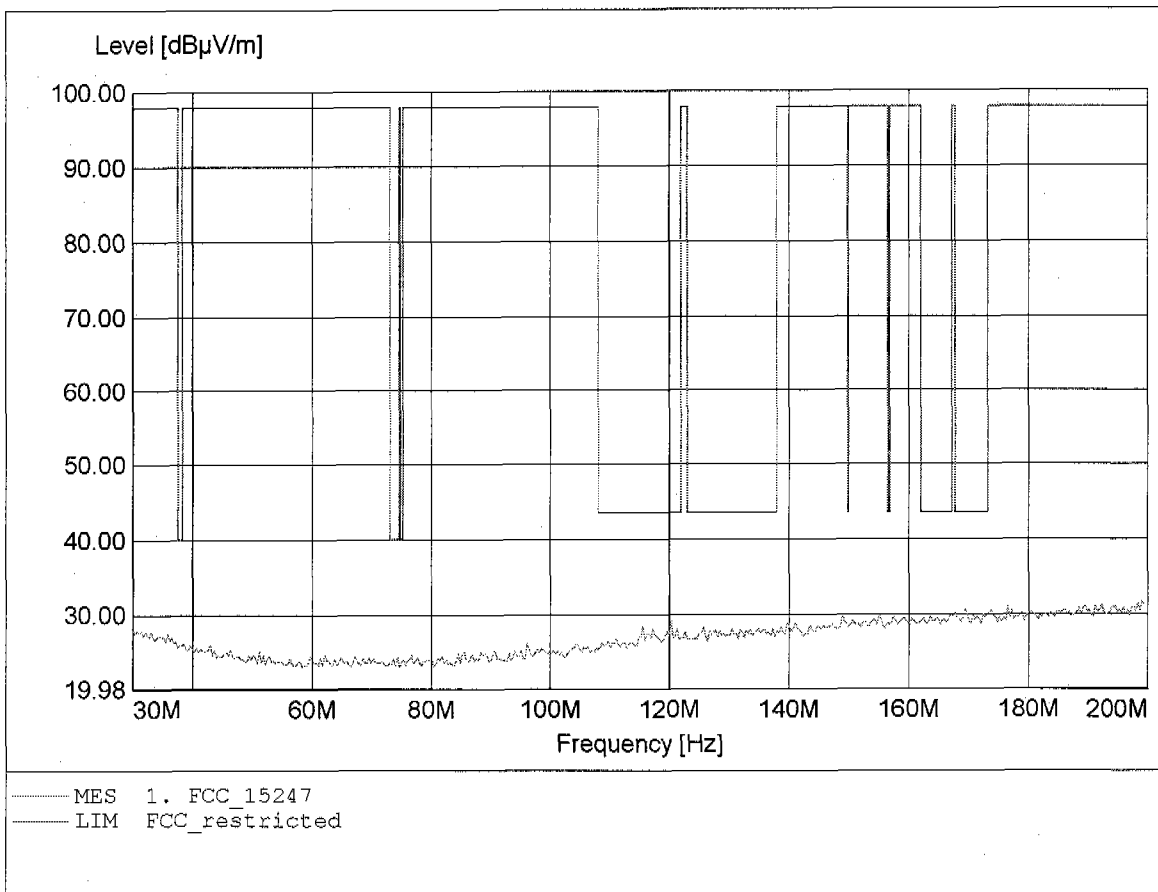


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 120.962MHz, Emax: 33.08dBµV/m, RBW: 100kHz

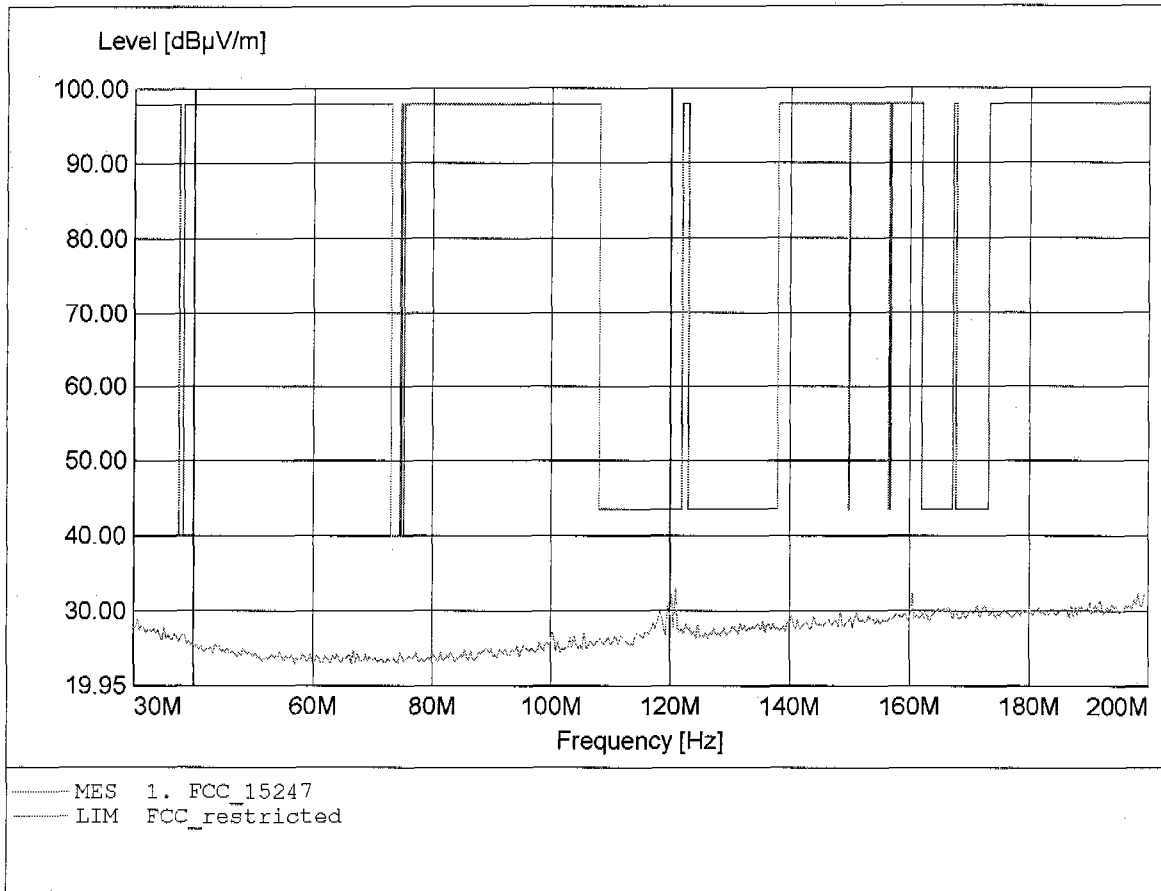


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 198.978MHz, Emax: 31.59dBµV/m, RBW: 100kHz

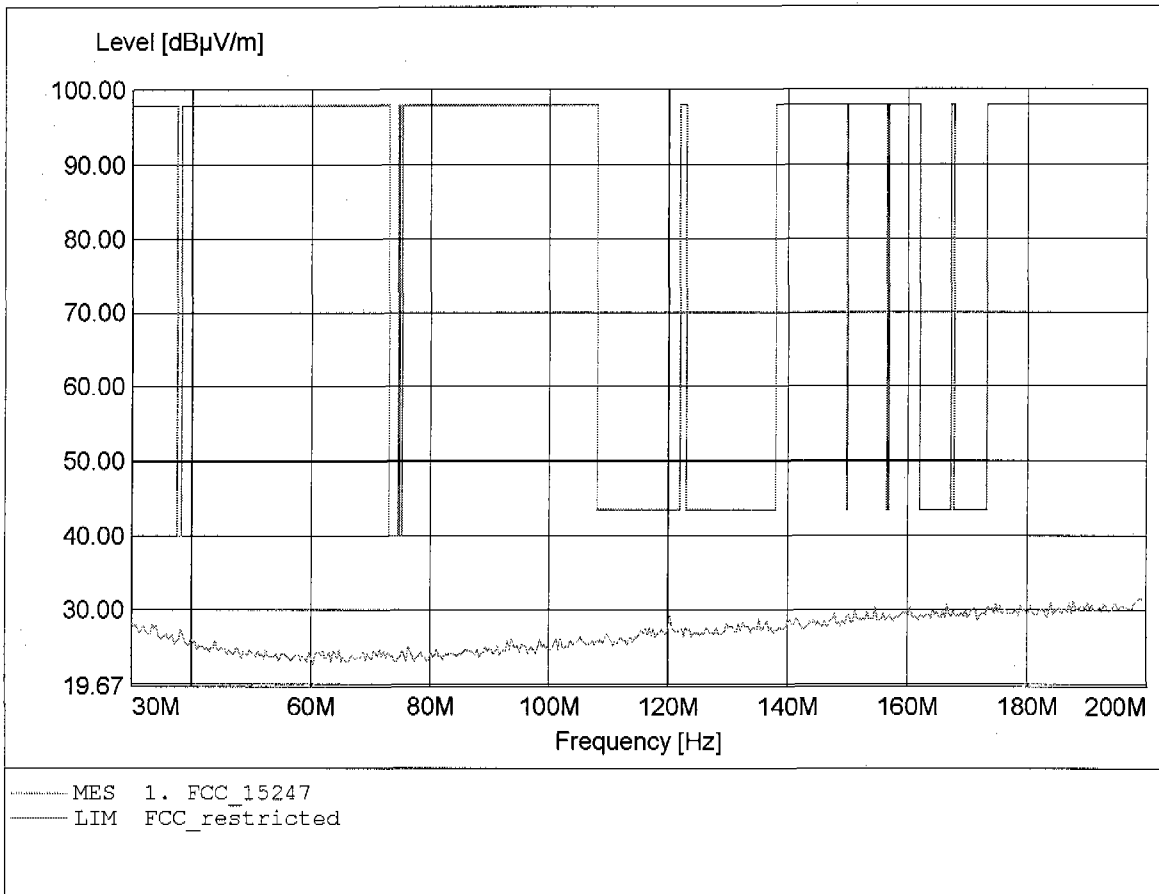


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 560.721MHz, Emax: 41.48dBµV/m, RBW: 100kHz

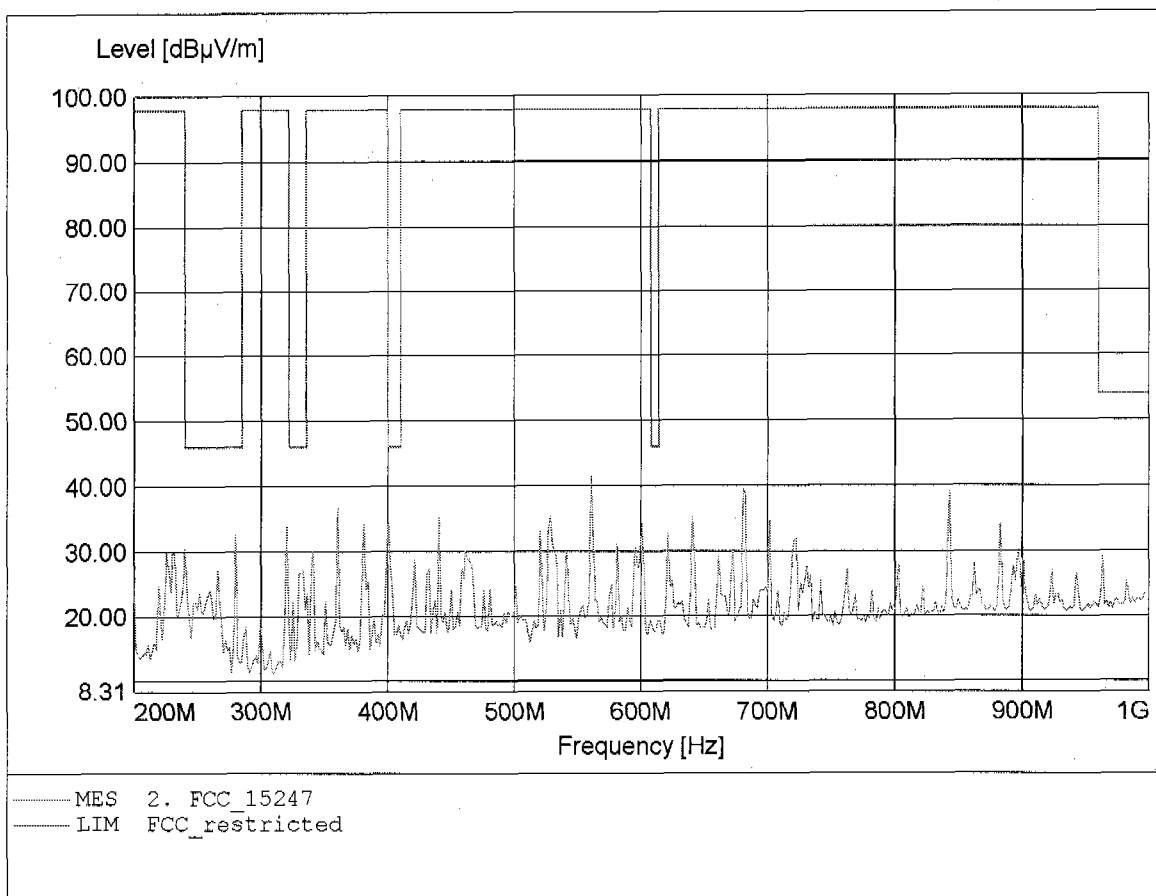


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 842.886MHz, Emax: 38.88dBµV/m, RBW: 100kHz

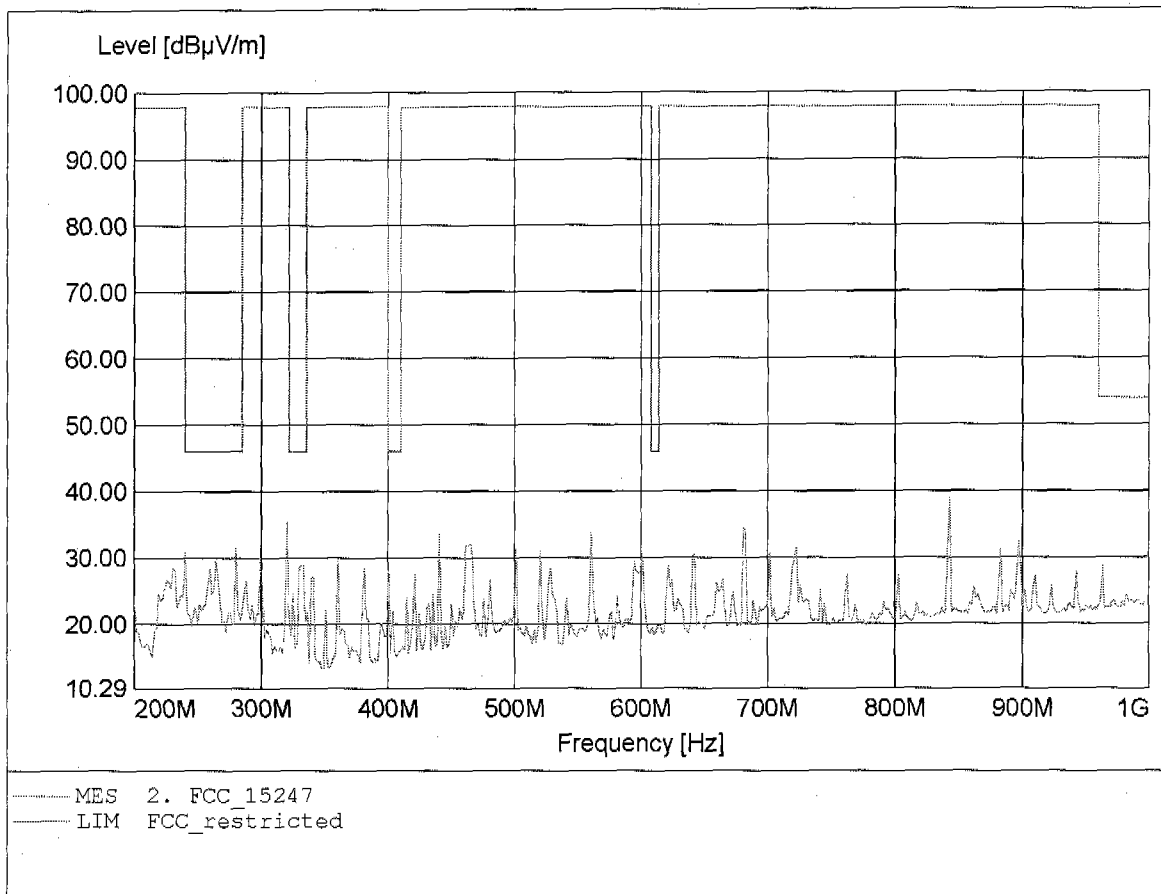


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 47
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 560.721MHz, Emax: 41.10dBµV/m, RBW: 100kHz

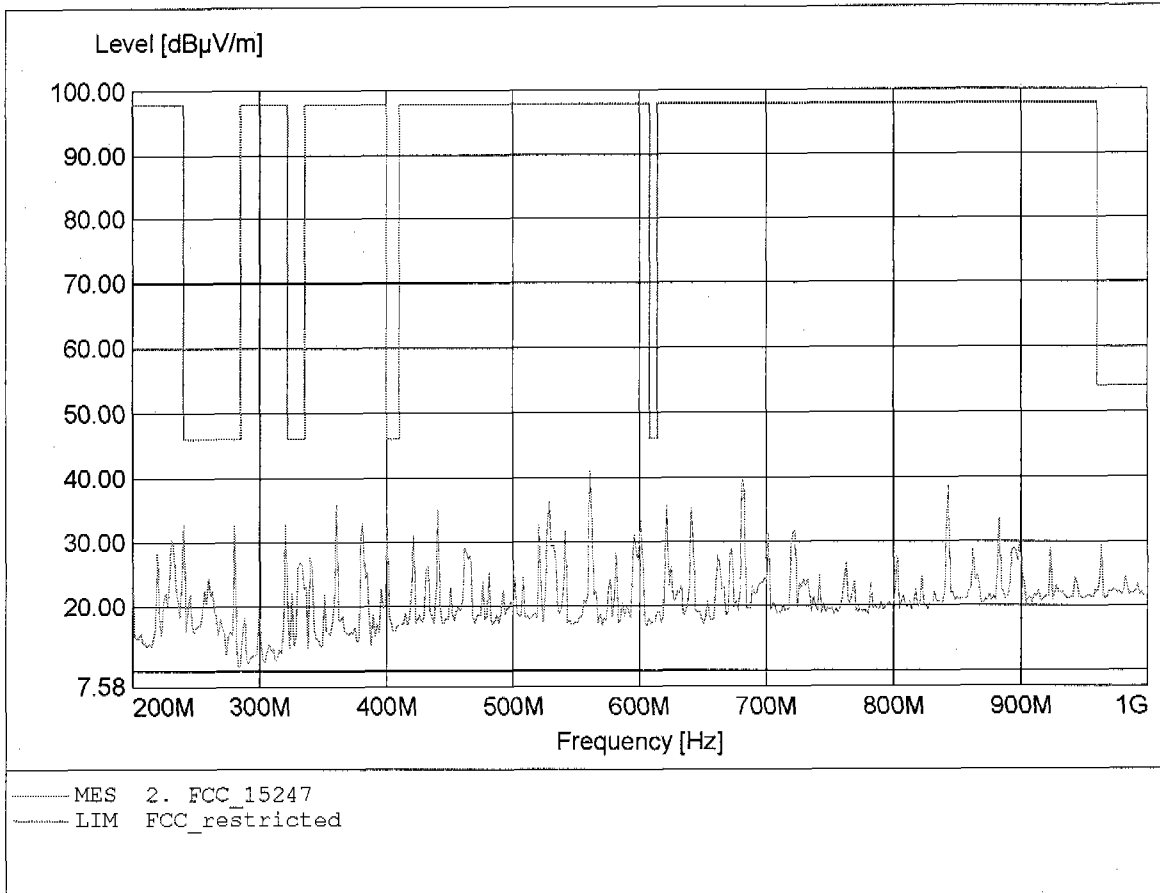


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 47
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 842.886MHz, Emax: 38.66dBµV/m, RBW: 100kHz

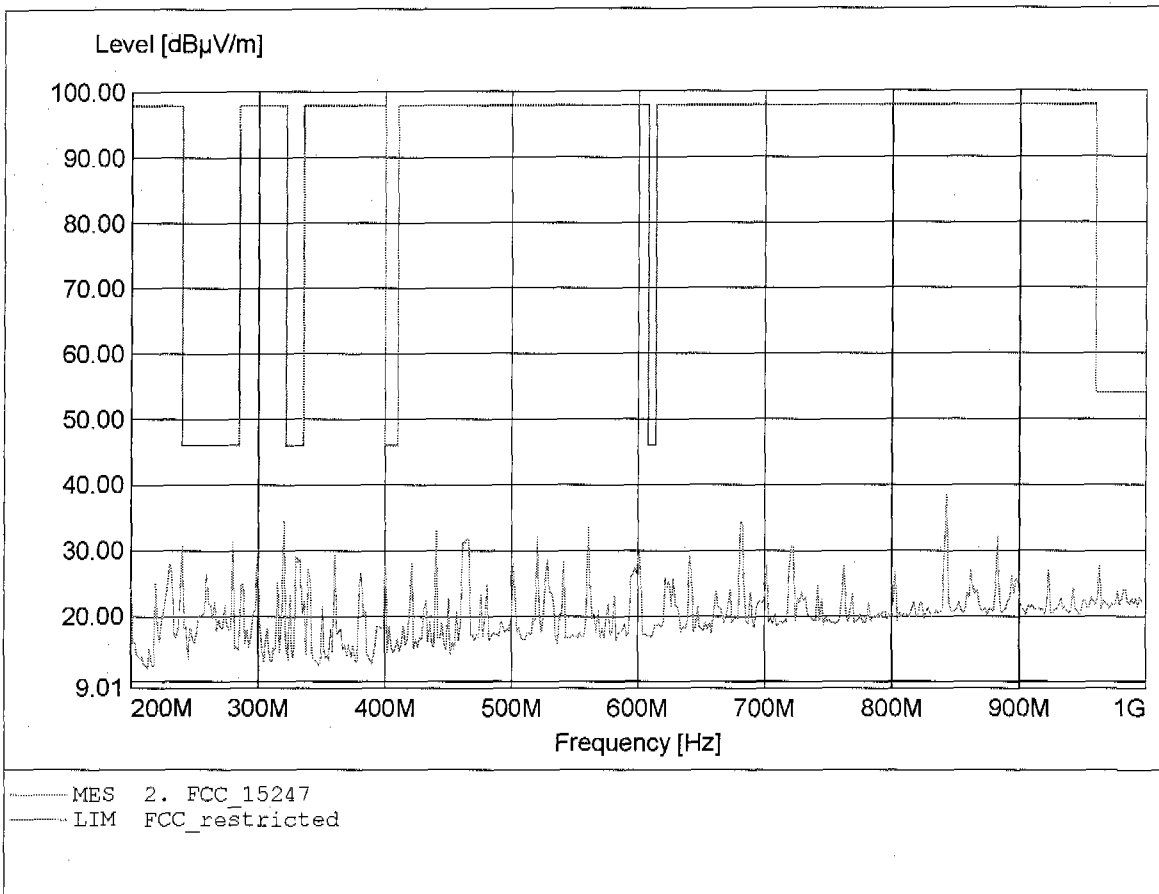


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 560.721MHz, Emax: 41.43dBµV/m, RBW: 100kHz

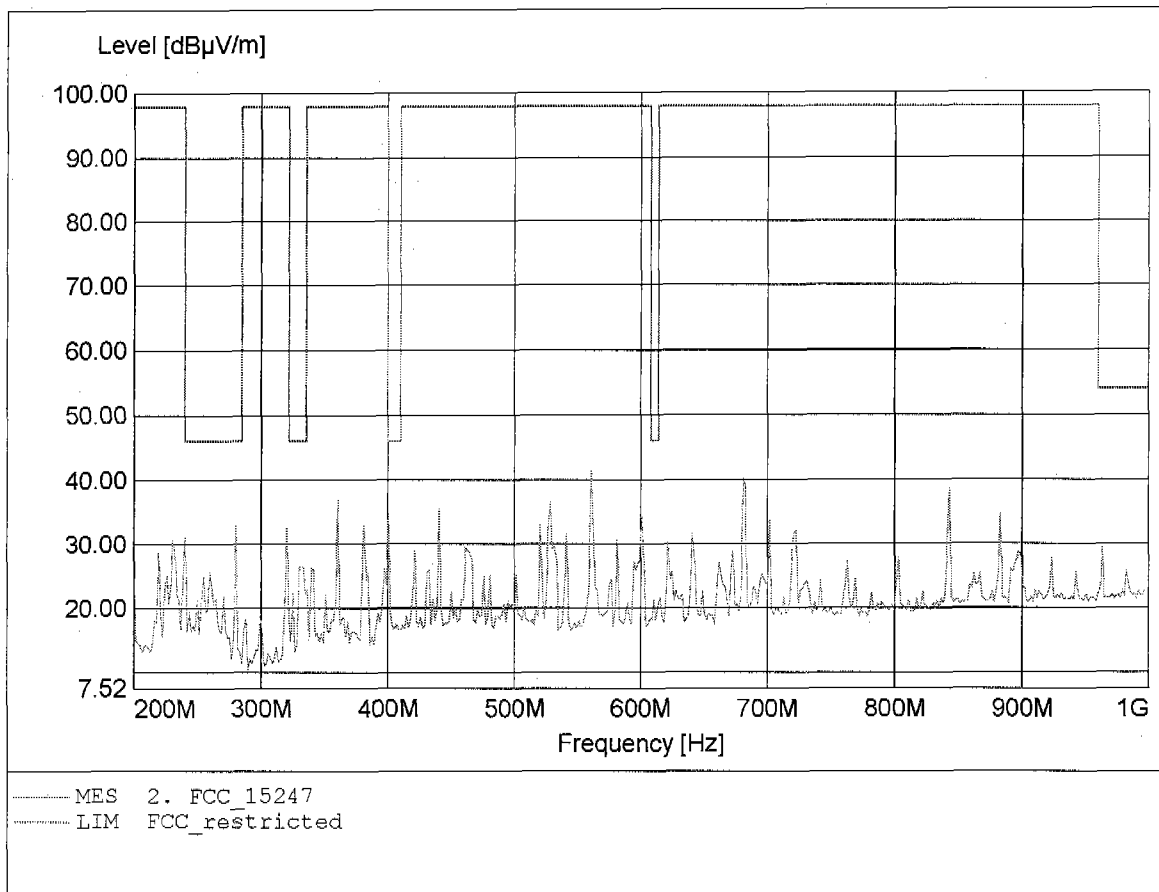


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 842.886MHz, Emax: 38.36dBµV/m, RBW: 100kHz

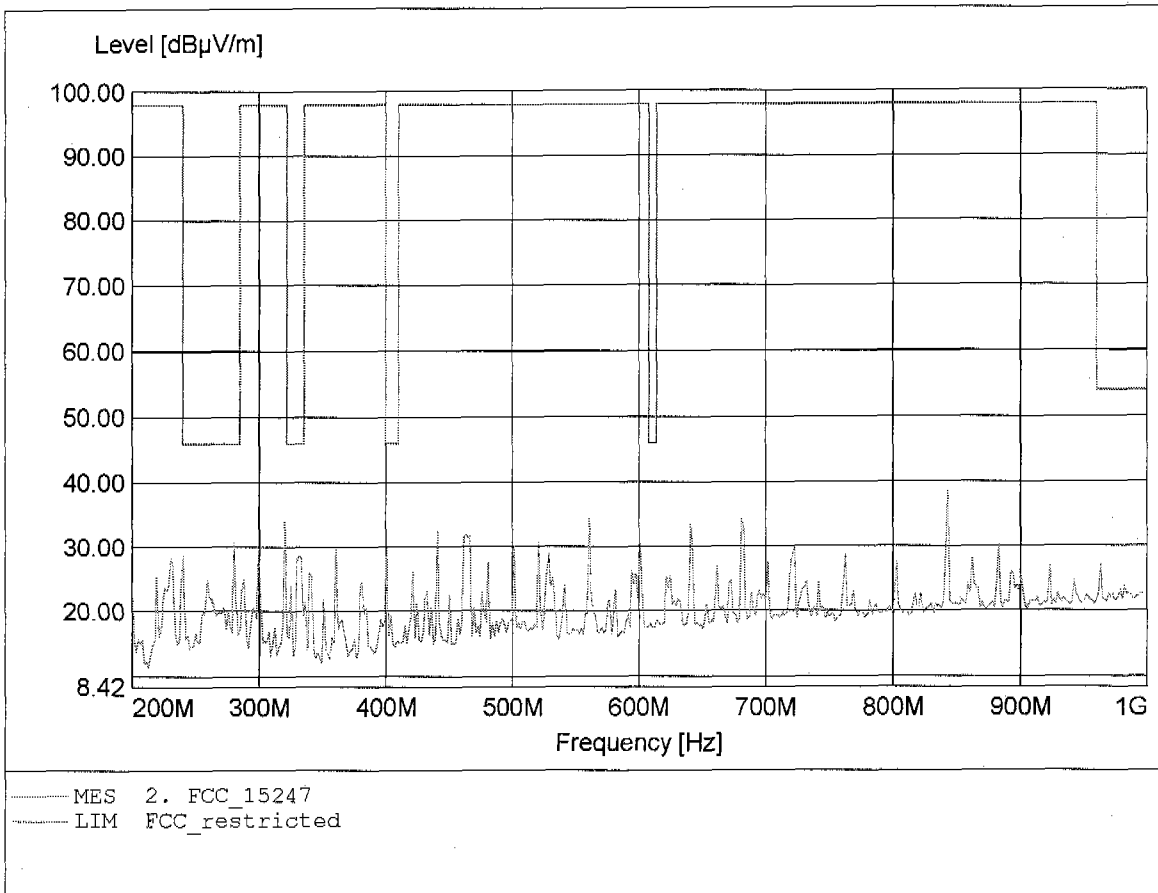


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.394GHz, Emax: 70.50dBµV/m, RBW: 1MHz

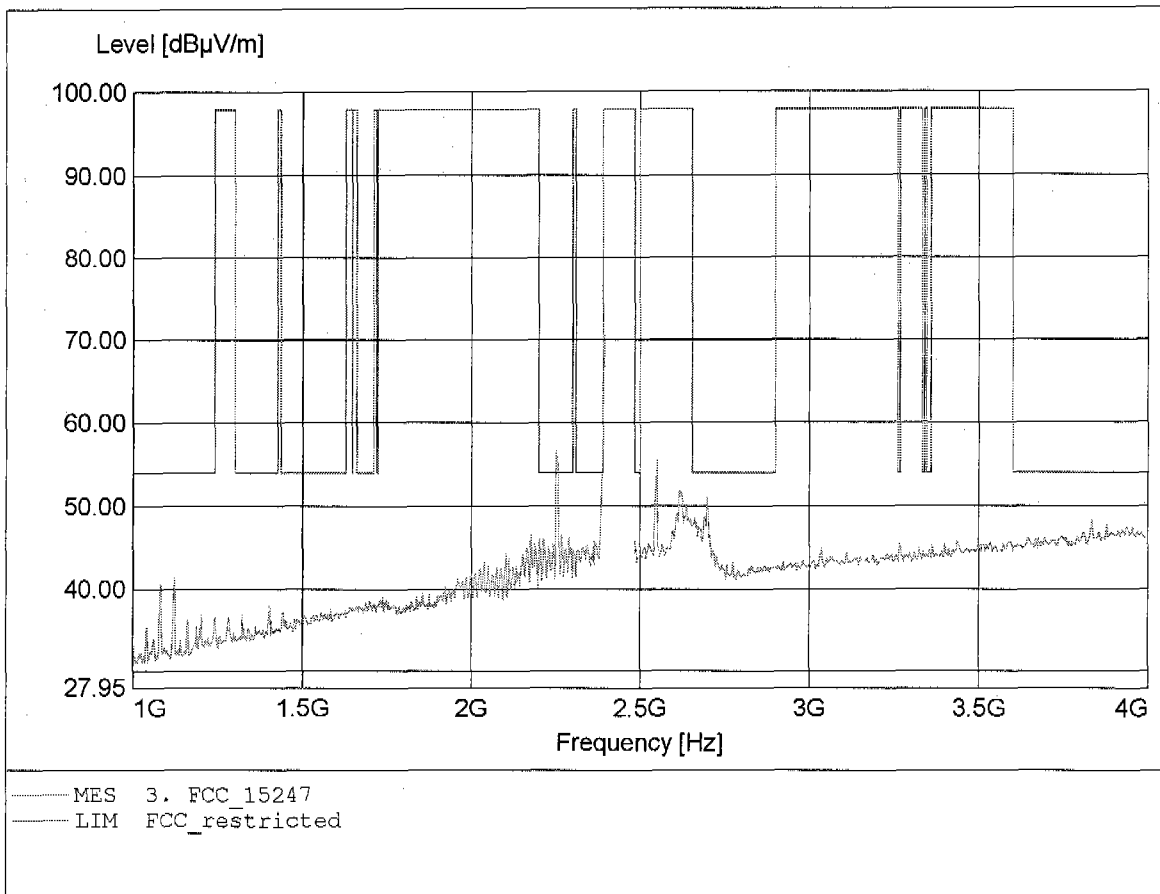


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.394GHz, Emax: 70.50dBµV/m, RBW: 1MHz

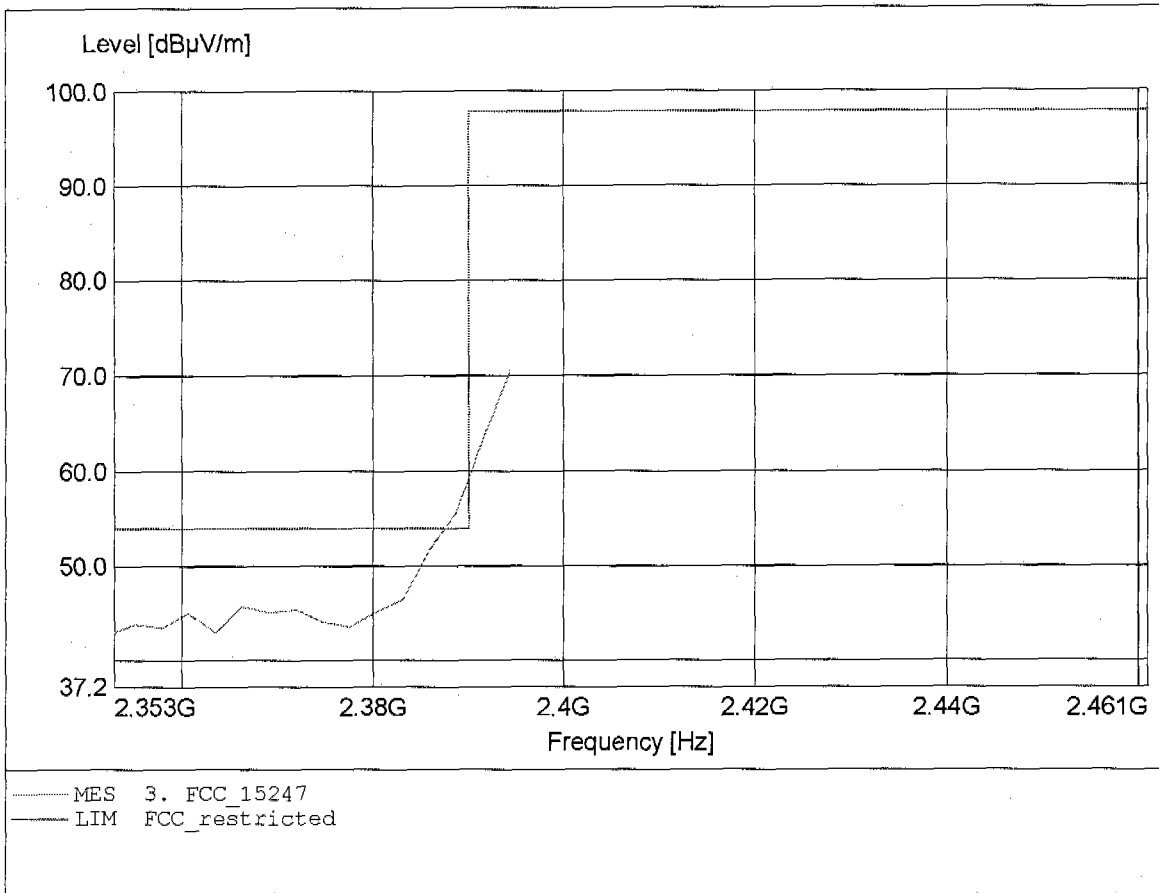


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.550GHz, Emax: 46.63dBµV/m, RBW: 1MHz

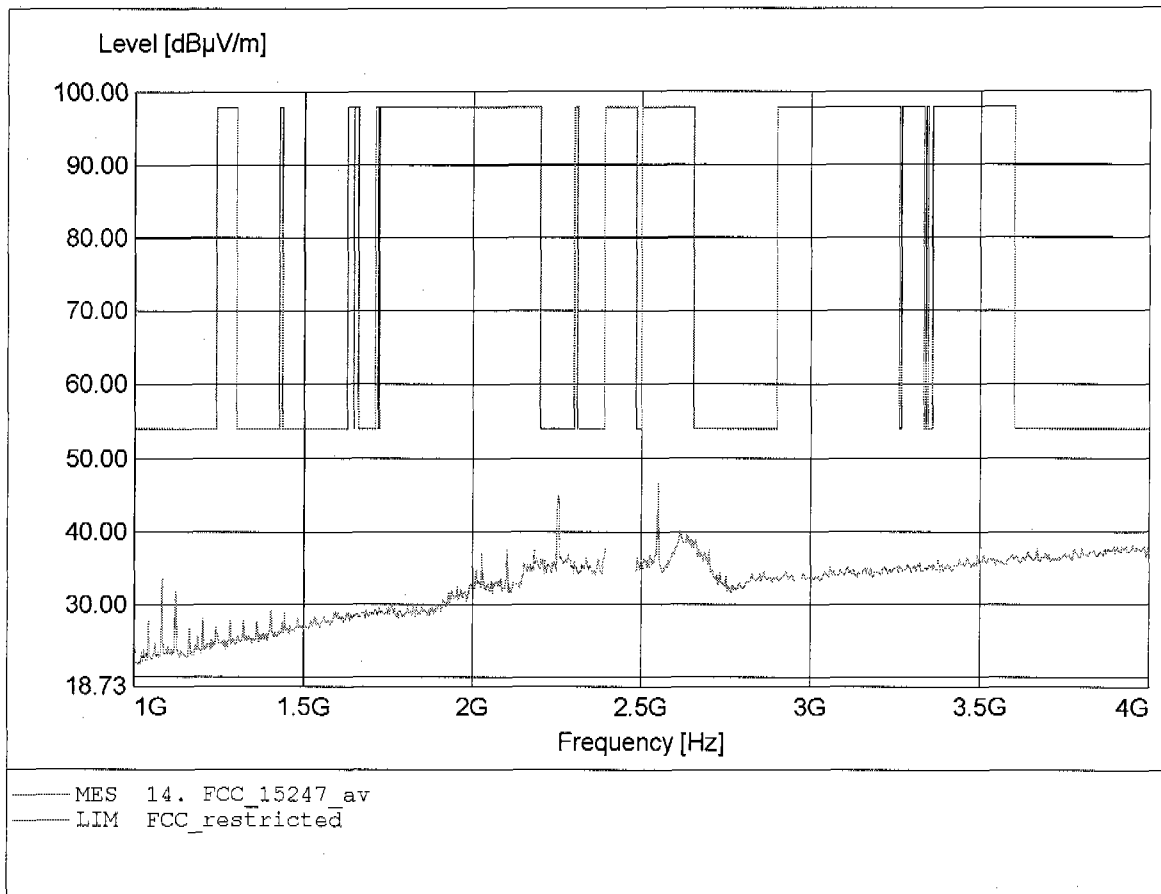


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.394GHz, Emax: 68.22dBµV/m, RBW: 1MHz

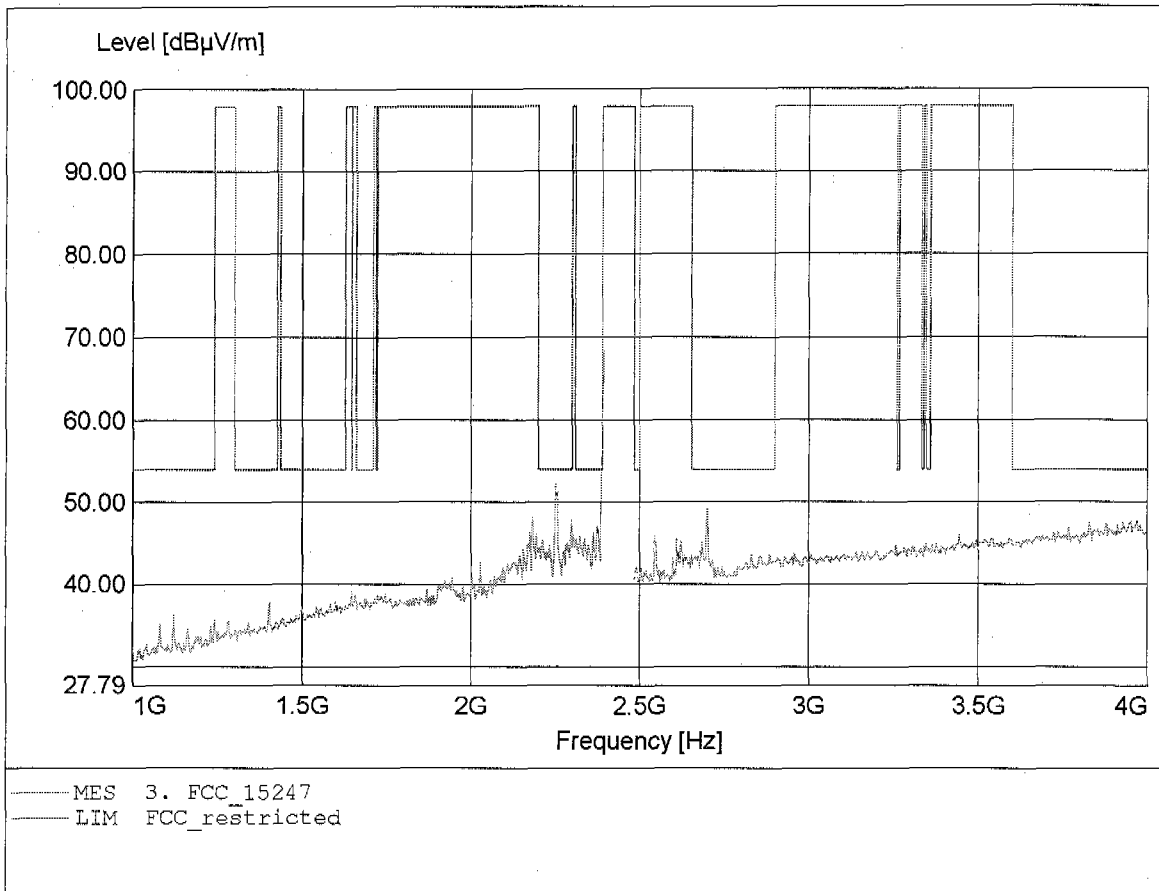


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
 EUT: Cordless Headset / Remote Beltpack
 Model: GN Ellipse / Ant.: 2 / Ch.: 0
 Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
 Test Site / Operator: ETS / Mr. Handrik
 Test Specification: according to §15.247, peak detector
 Comment 1: Dist.: 3m, Ant.: HL025, amplif.
 Comment 2: Freq: 2.394GHz, Emax: 68.22dBµV/m, RBW: 1MHz

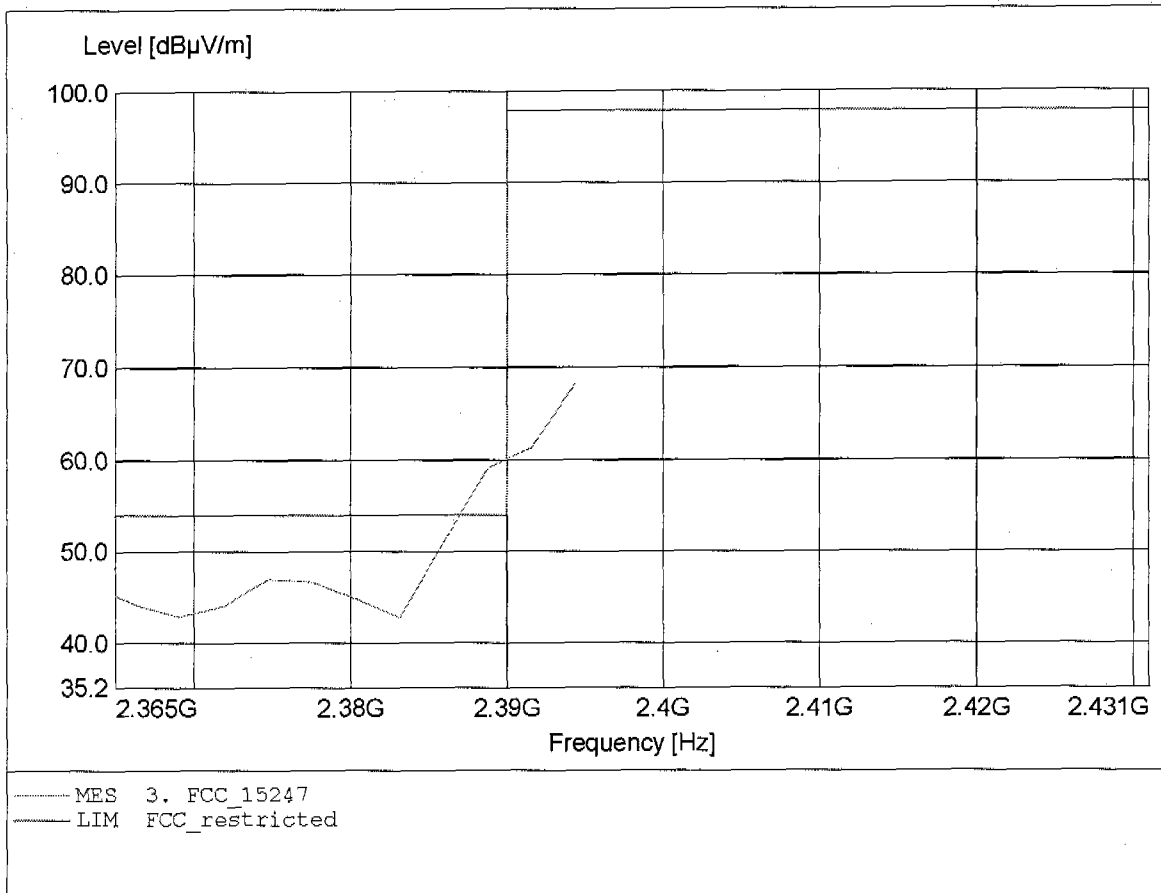


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.254GHz, Emax: 45.70dBµV/m, RBW: 1MHz

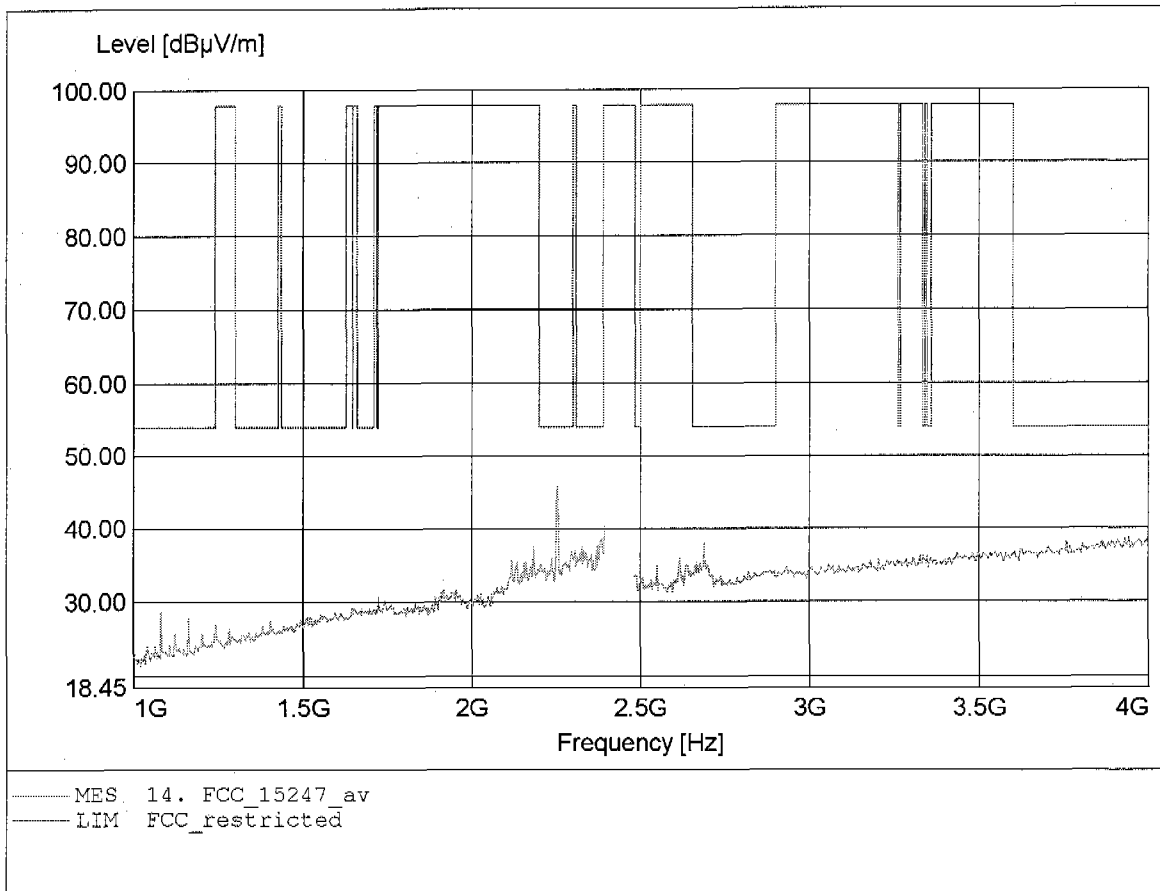


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 47
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.291GHz, Emax: 56.14dBµV/m, RBW: 1MHz

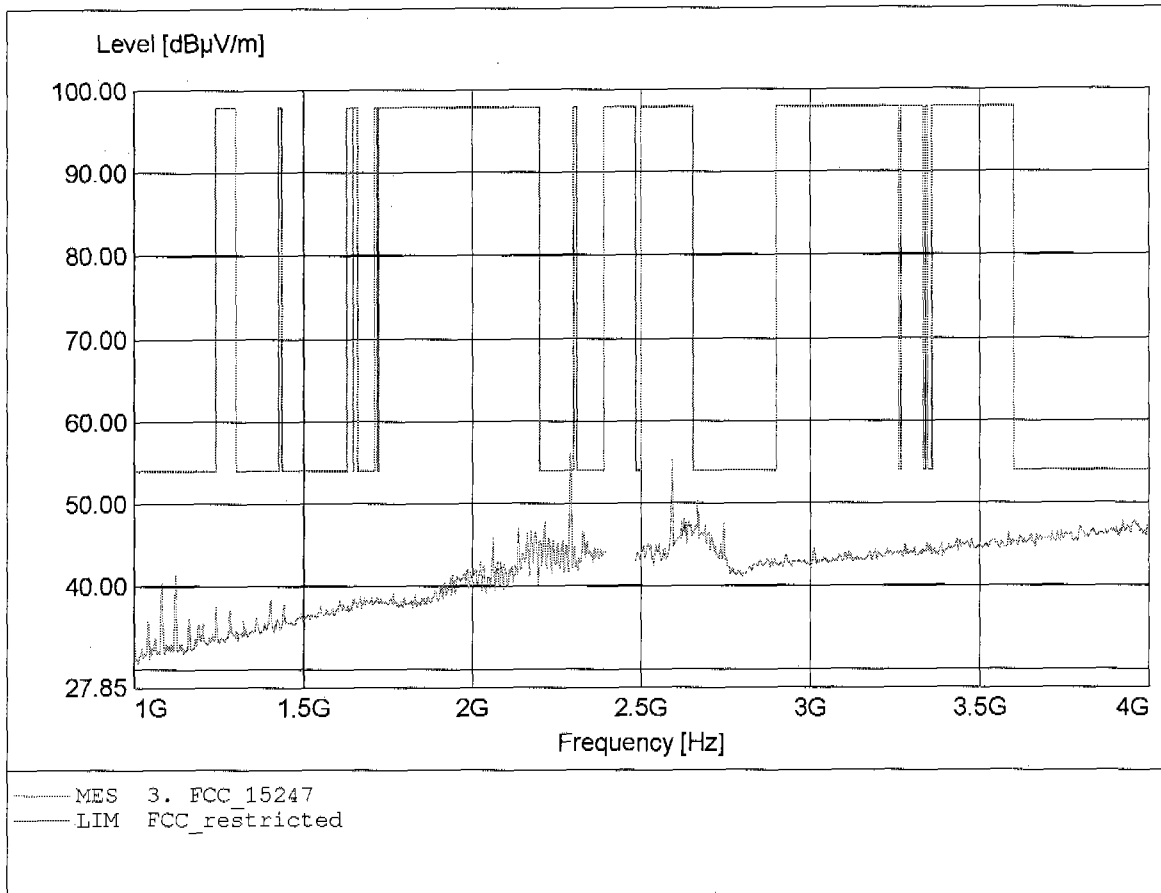


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 47
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.291GHz, Emax: 46.46dBµV/m, RBW: 1MHz

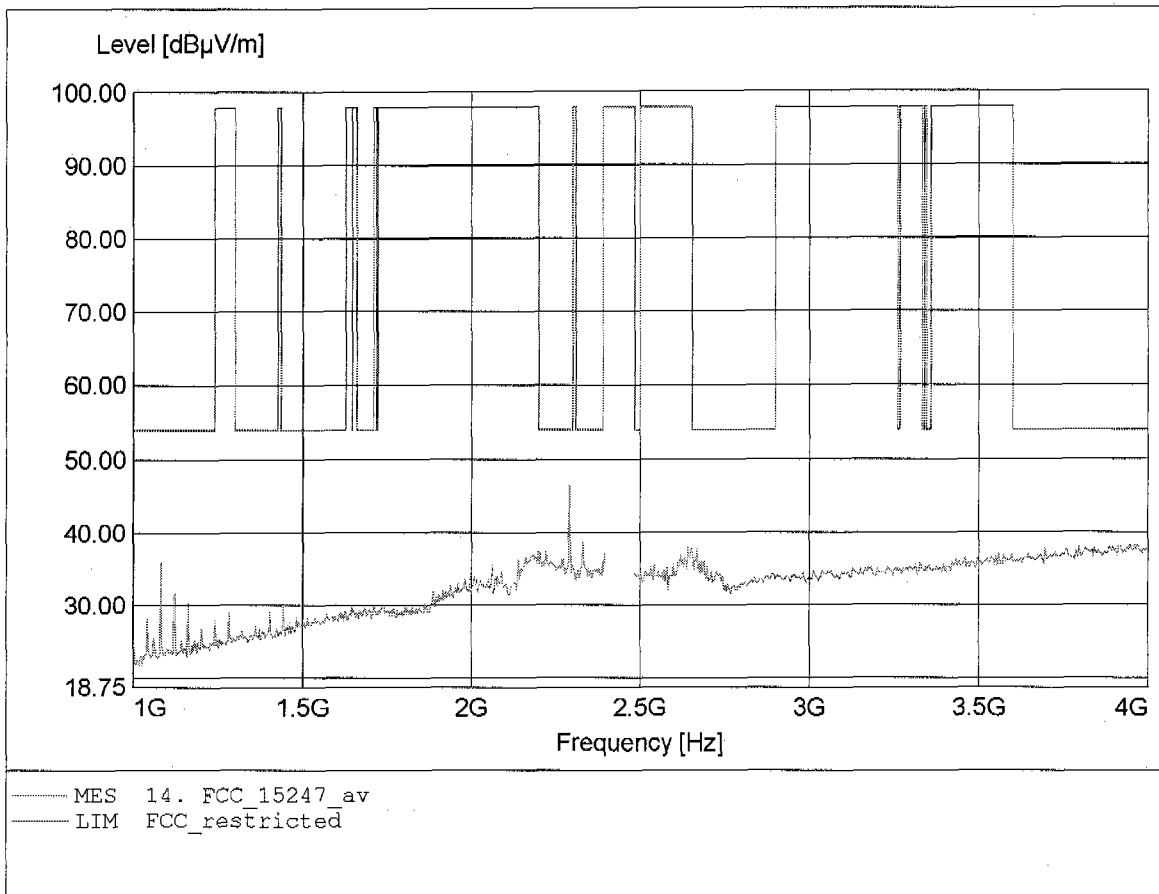


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 47
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.291GHz, Emax: 55.18dBµV/m, RBW: 1MHz

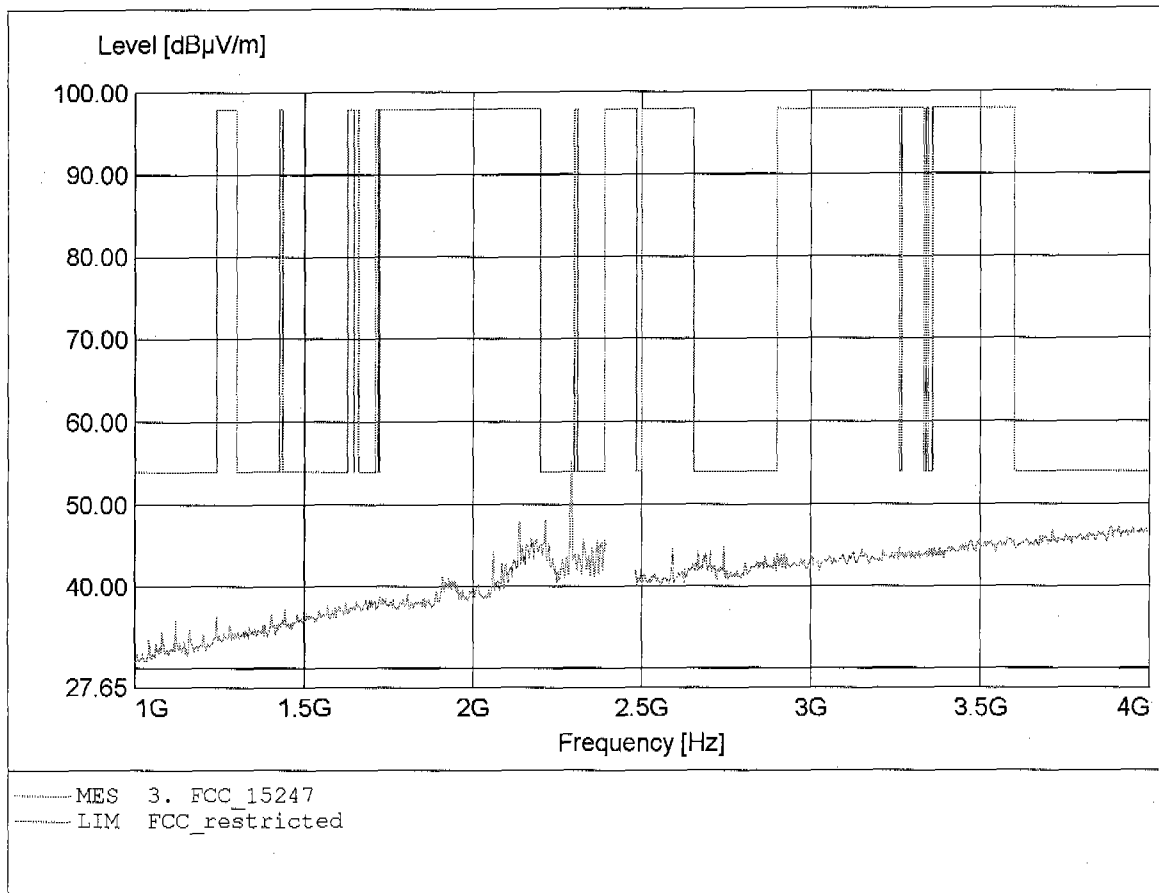


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 47
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.291GHz, Emax: 48.84dBµV/m, RBW: 1MHz

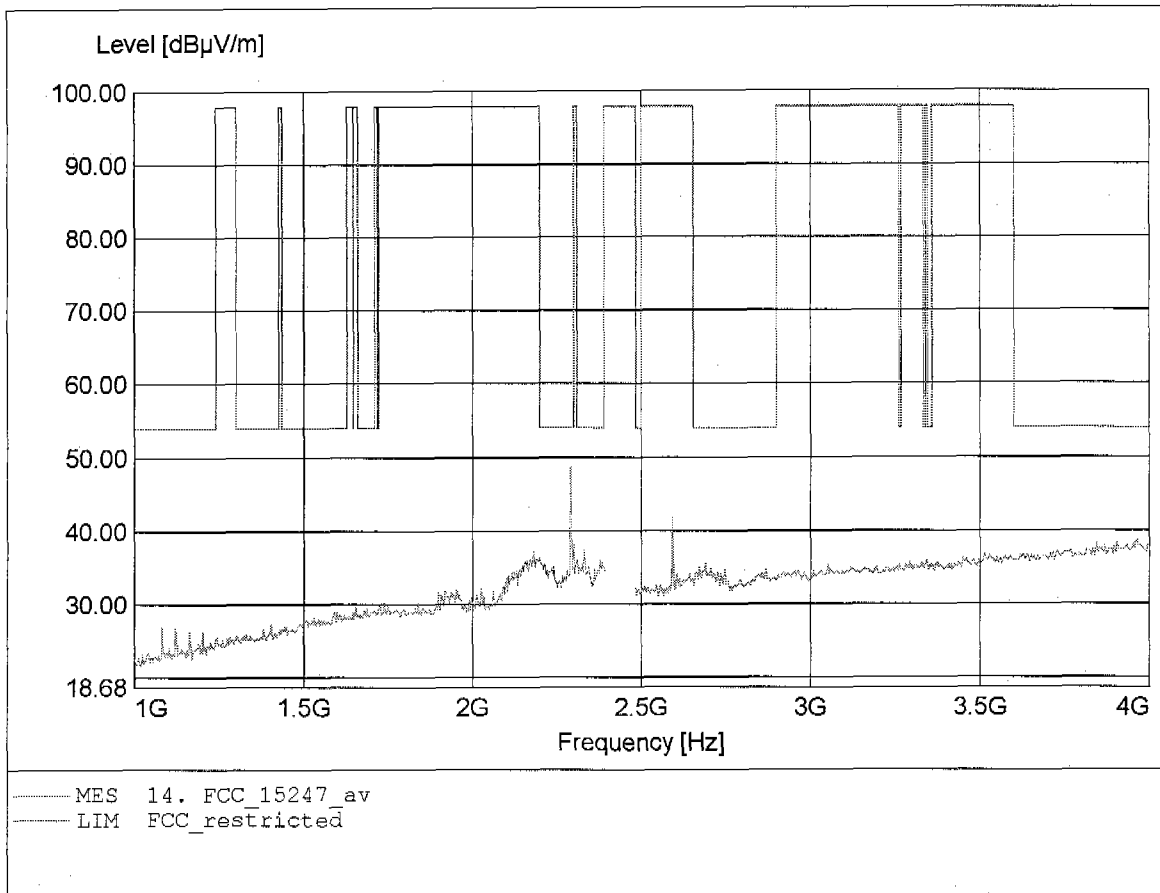


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.484GHz, Emax: 101.67dBµV/m, RBW: 1MHz

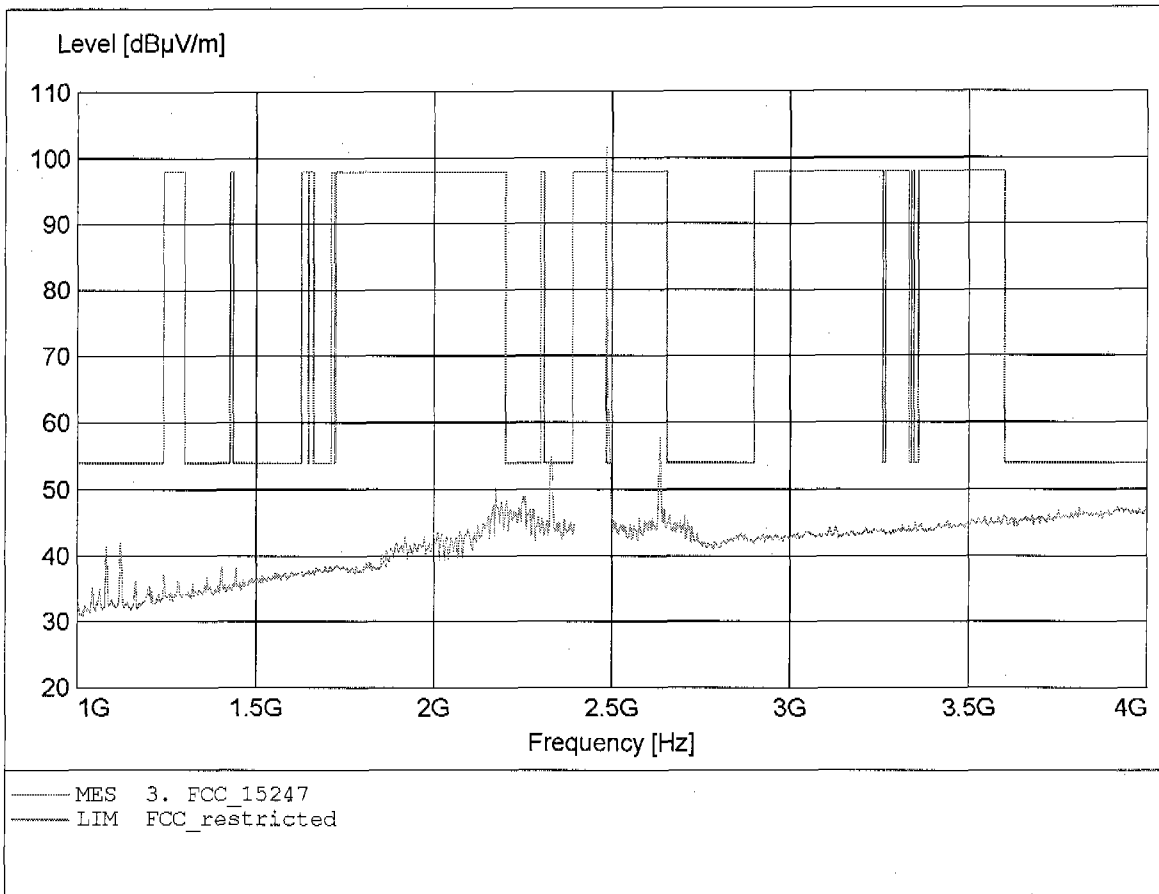


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.484GHz, Emax: 101.67dBµV/m, RBW: 1MHz

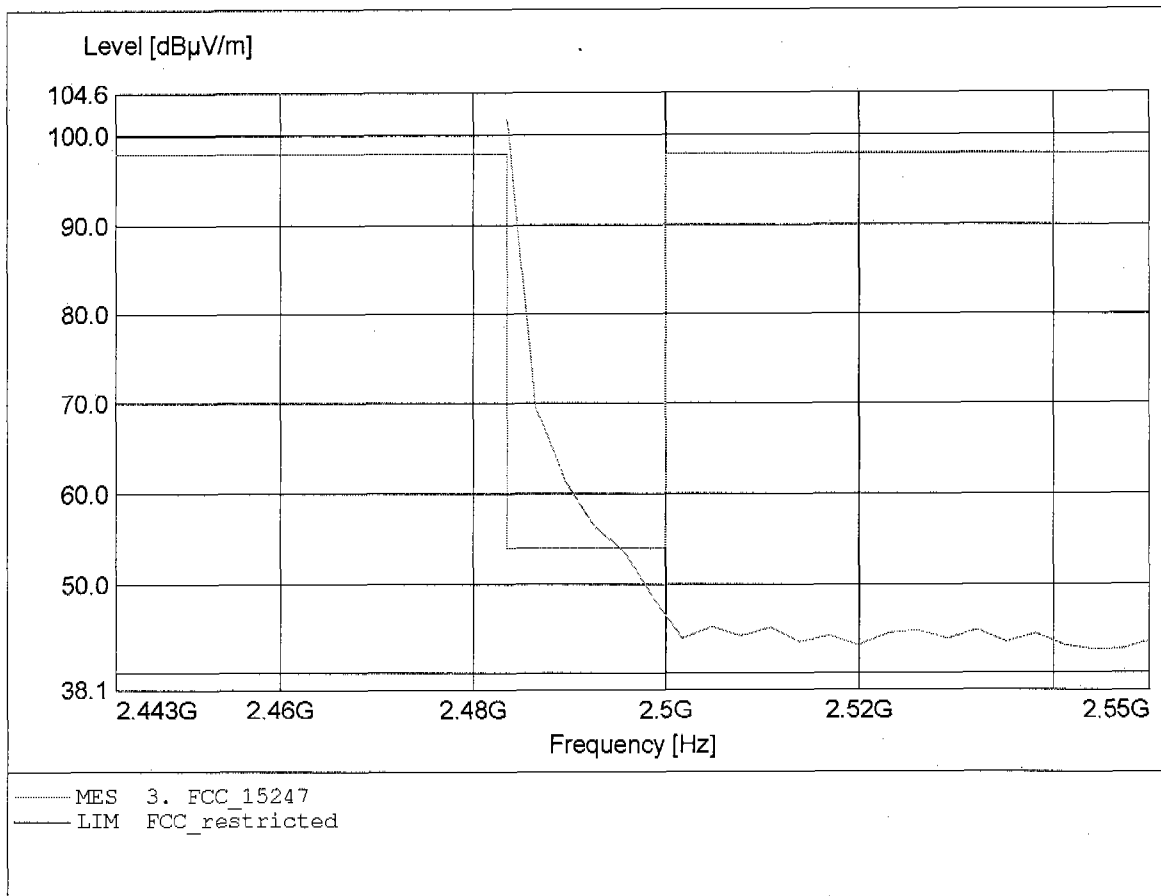


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.484GHz, Emax: 92.97dBµV/m, RBW: 1MHz

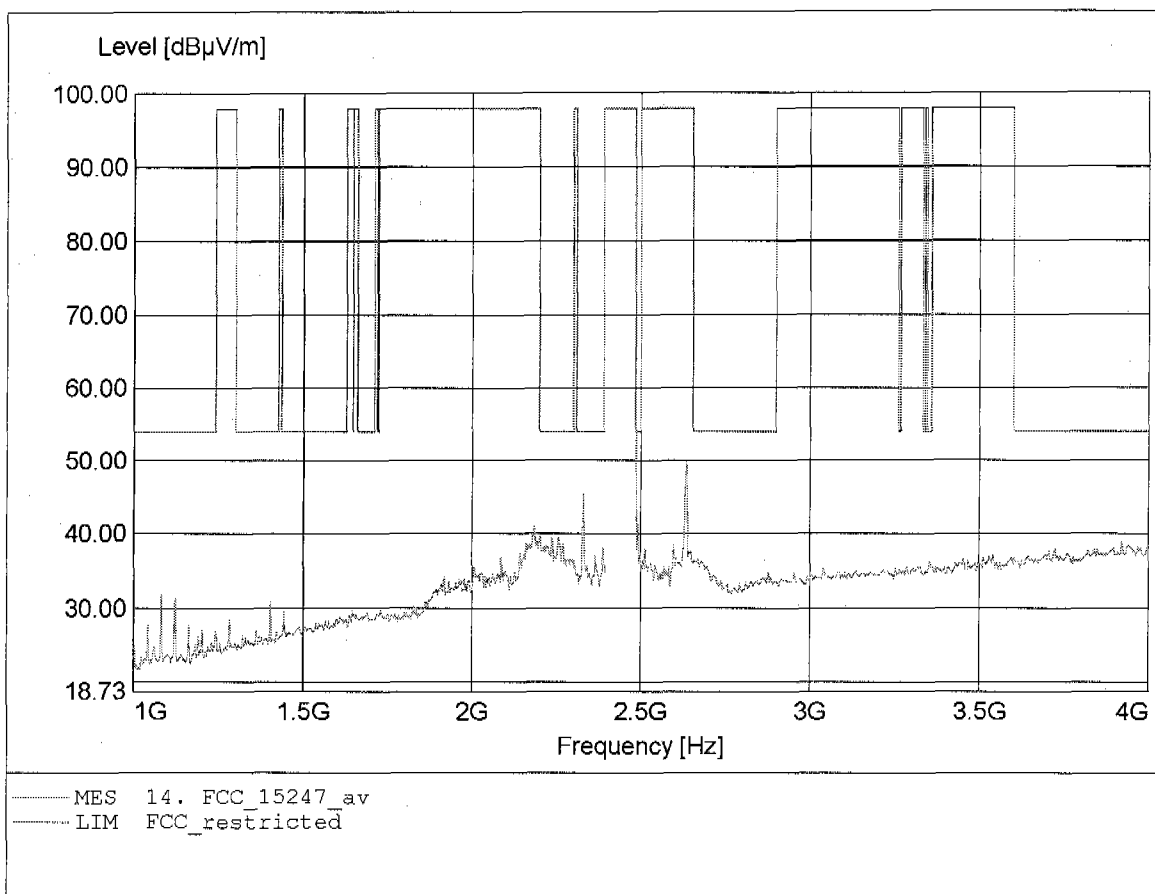


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.484GHz, Emax: 92.97dBµV/m, RBW: 1MHz

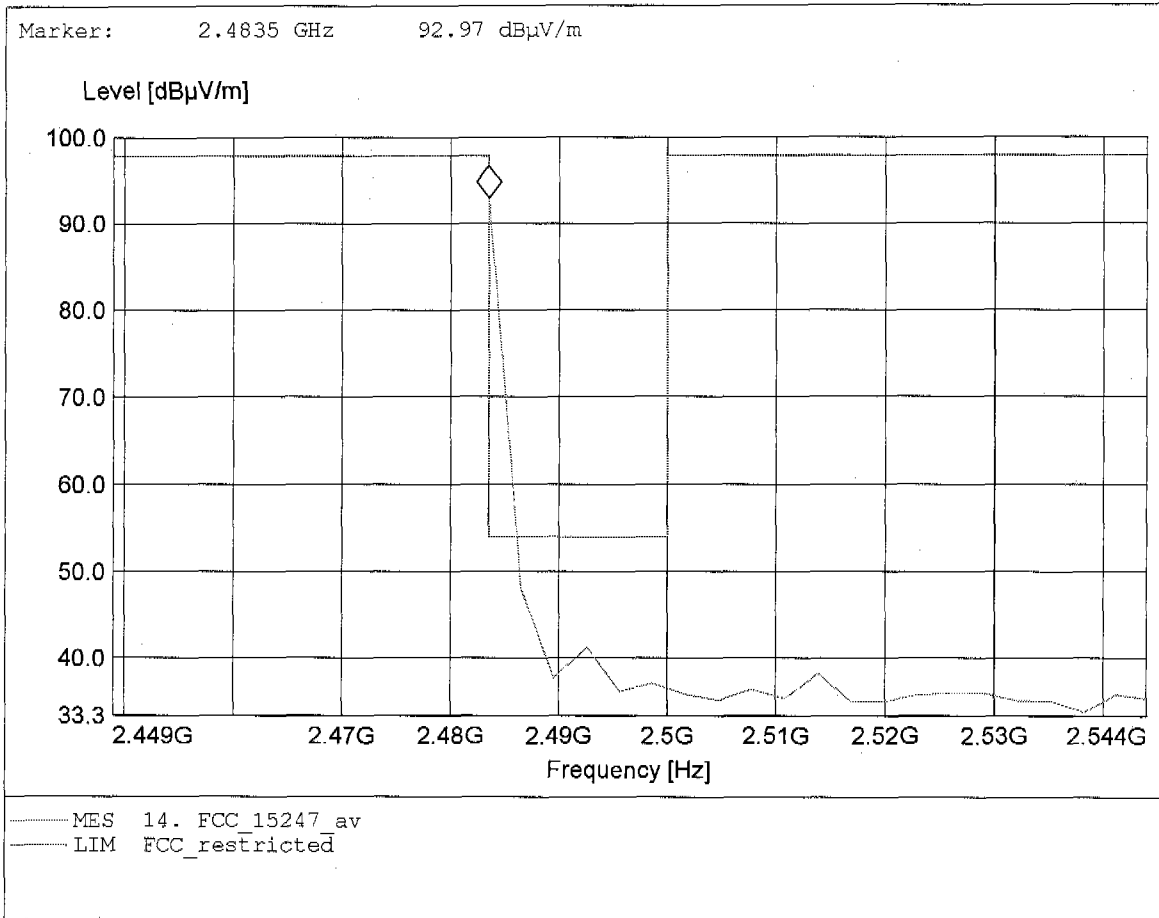


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.484GHz, Emax: 99.68dBµV/m, RBW: 1MHz

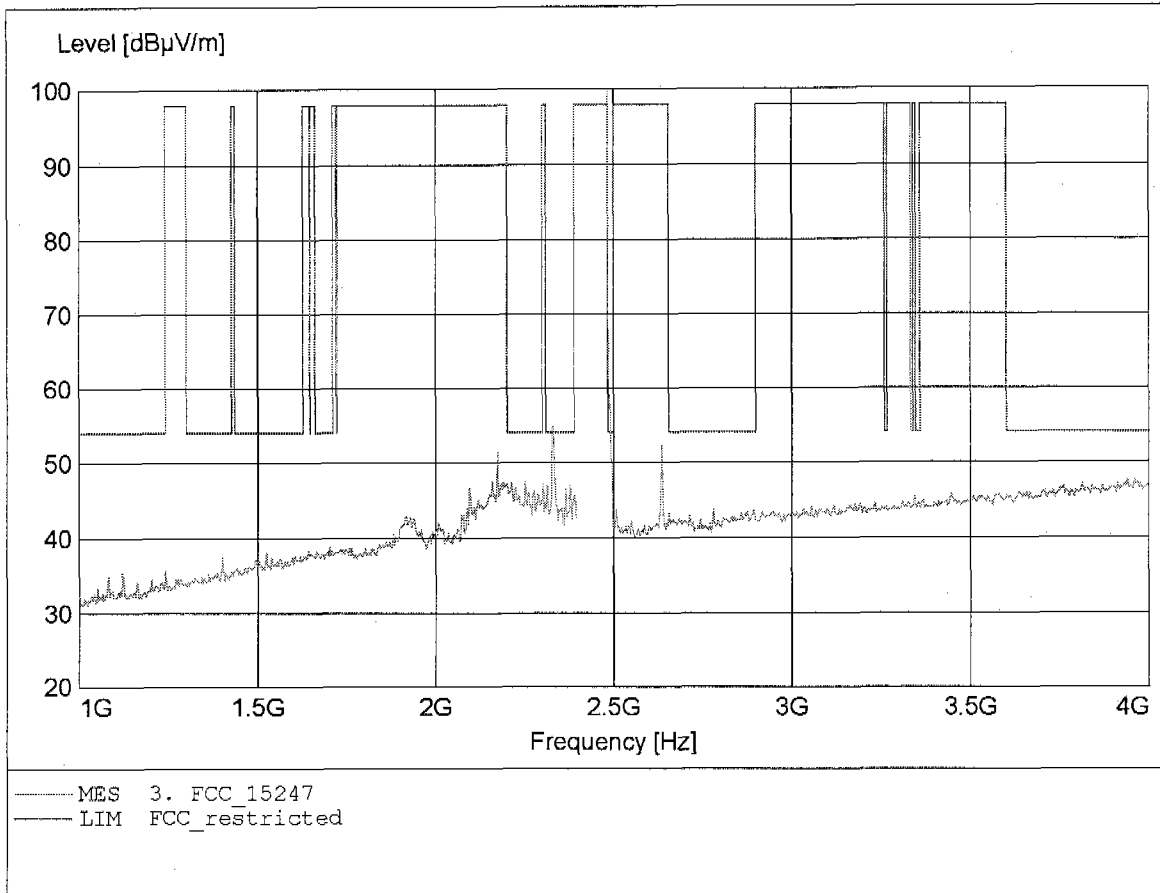


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.484GHz, Emax: 99.68dBµV/m, RBW: 1MHz

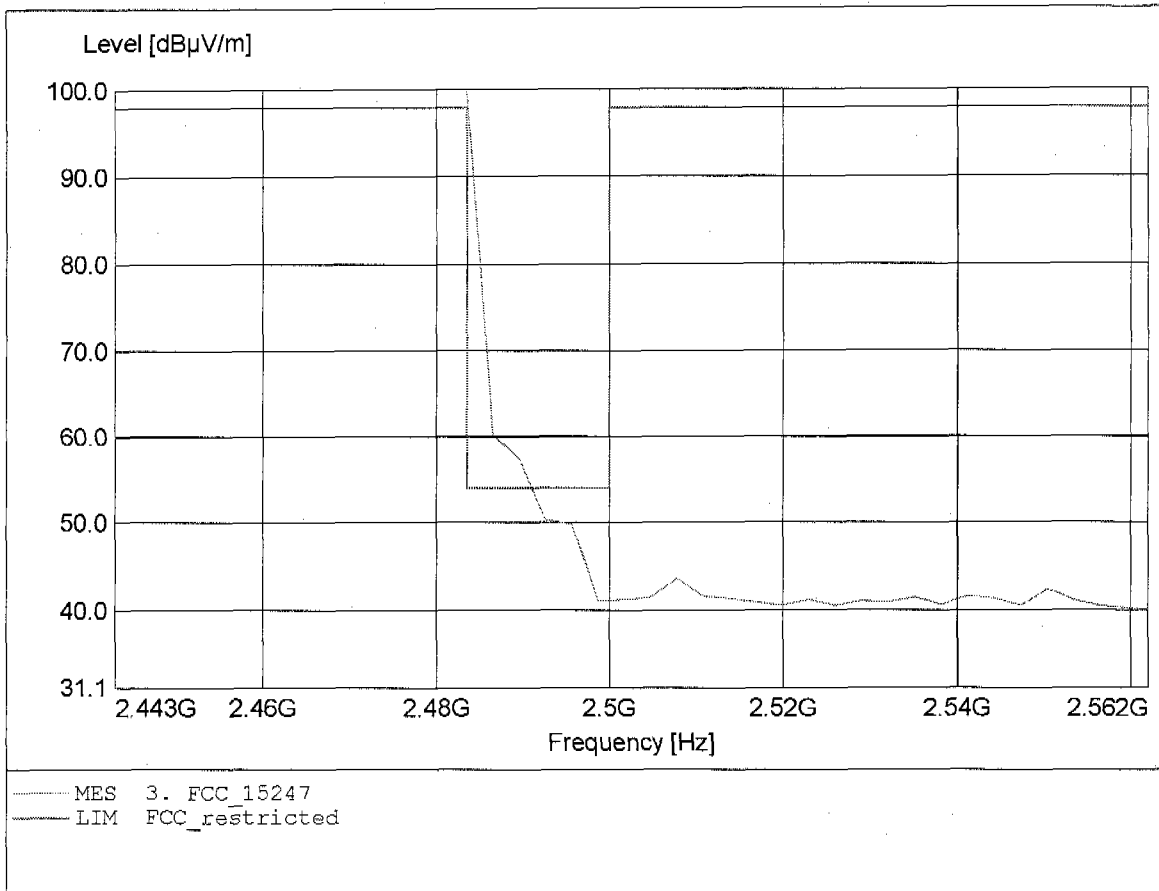


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.484GHz, Emax: 91.09dBµV/m, RBW: 1MHz

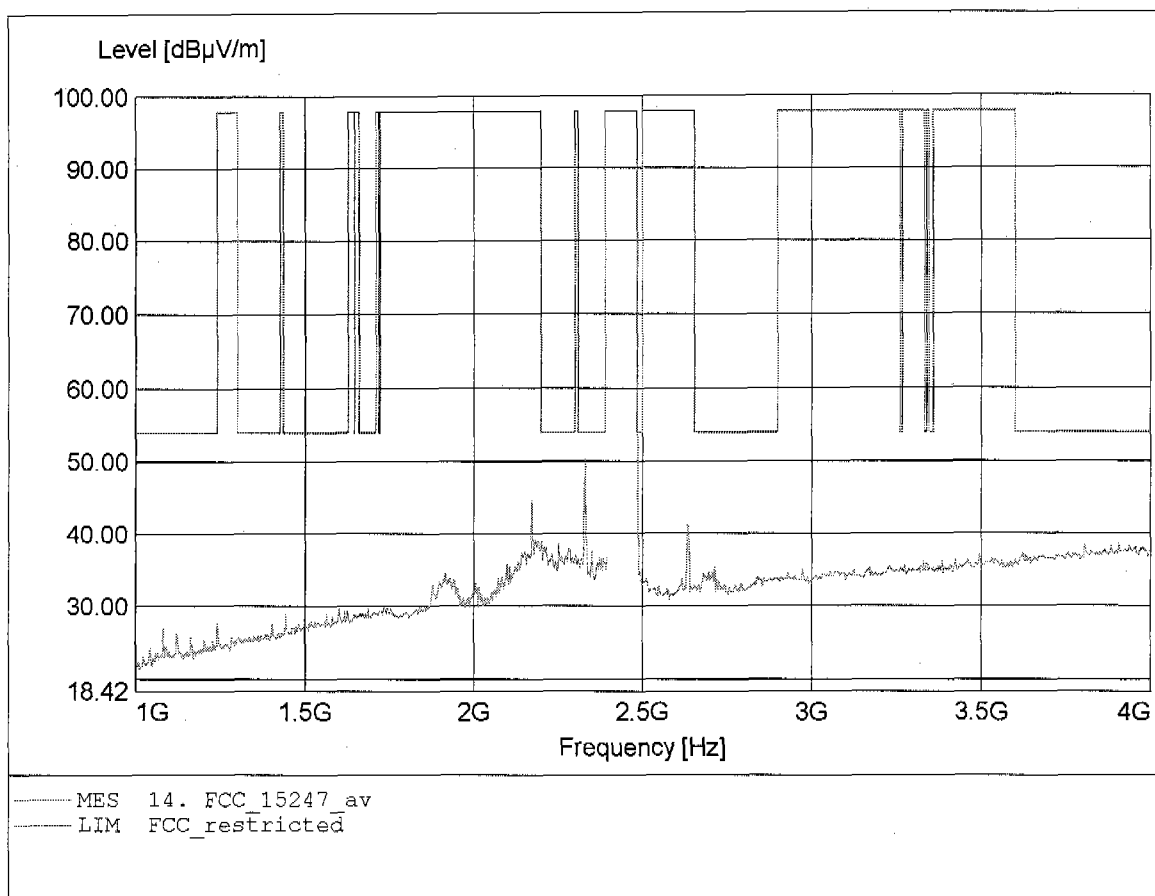


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.484GHz, Emax: 91.09dBµV/m, RBW: 1MHz

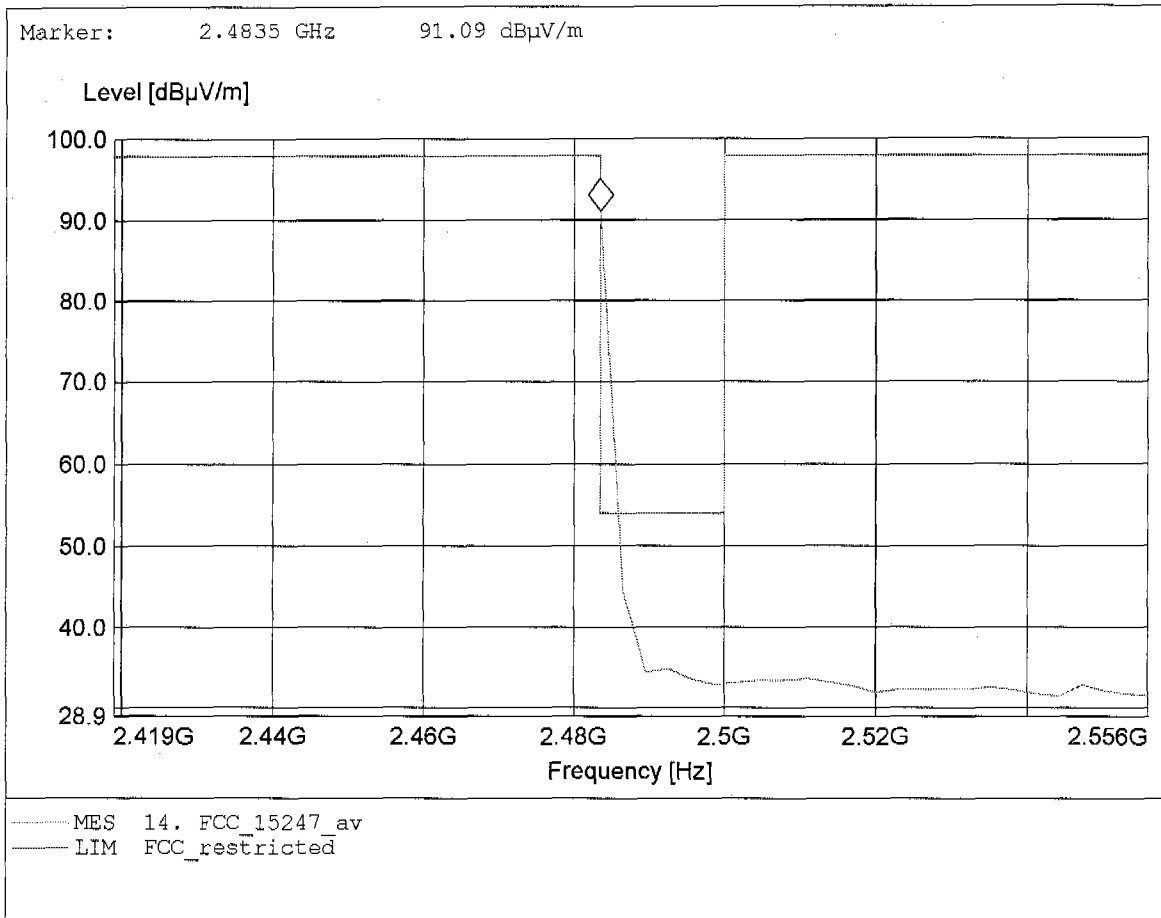


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 57.90dBµV/m, RBW: 1MHz

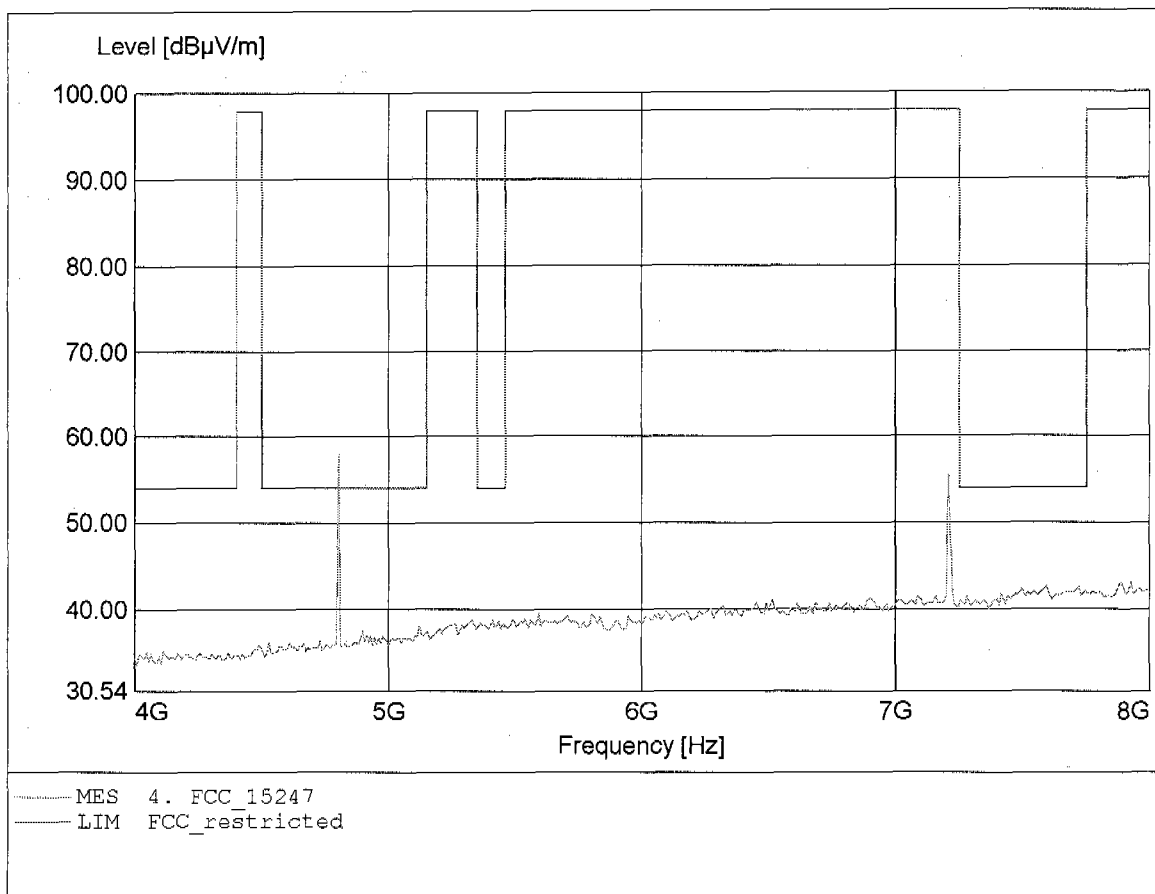


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 37.84dBµV/m, RBW: 1MHz

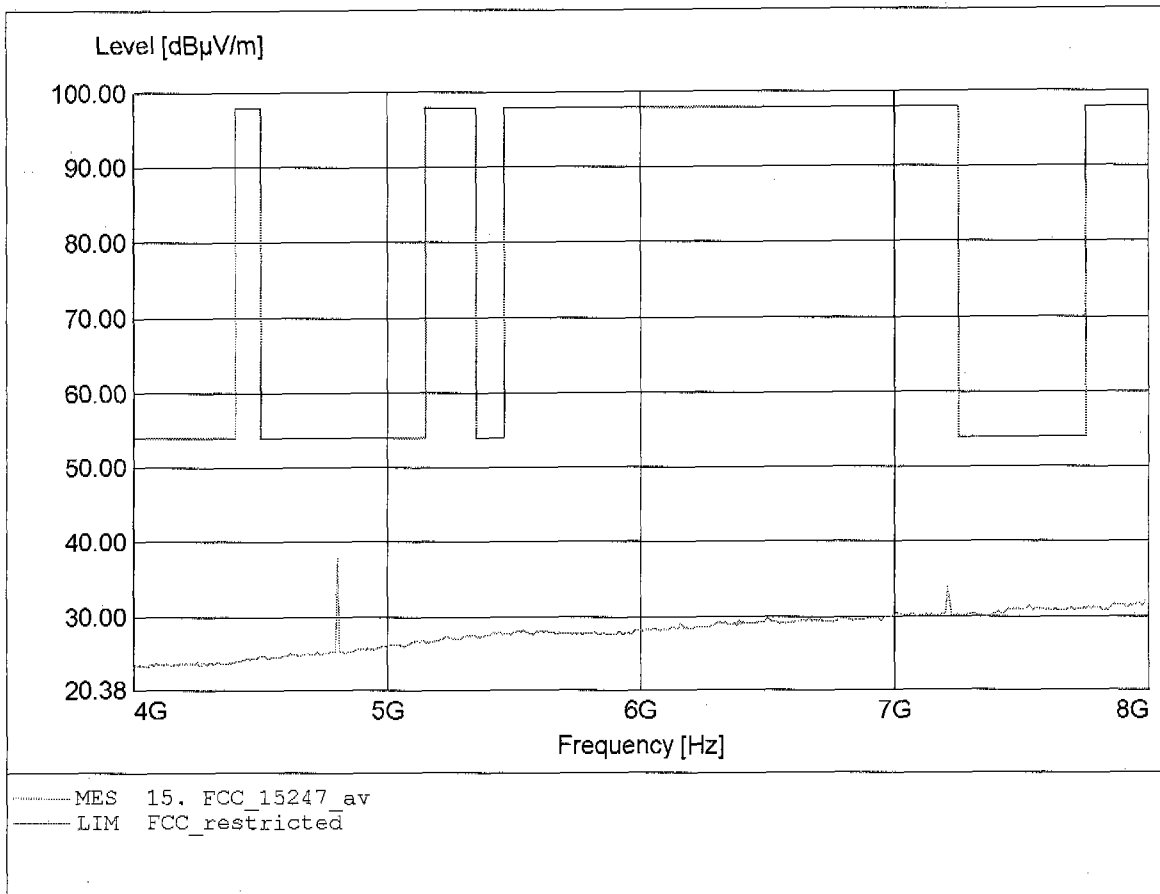


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 63.31dBµV/m, RBW: 1MHz

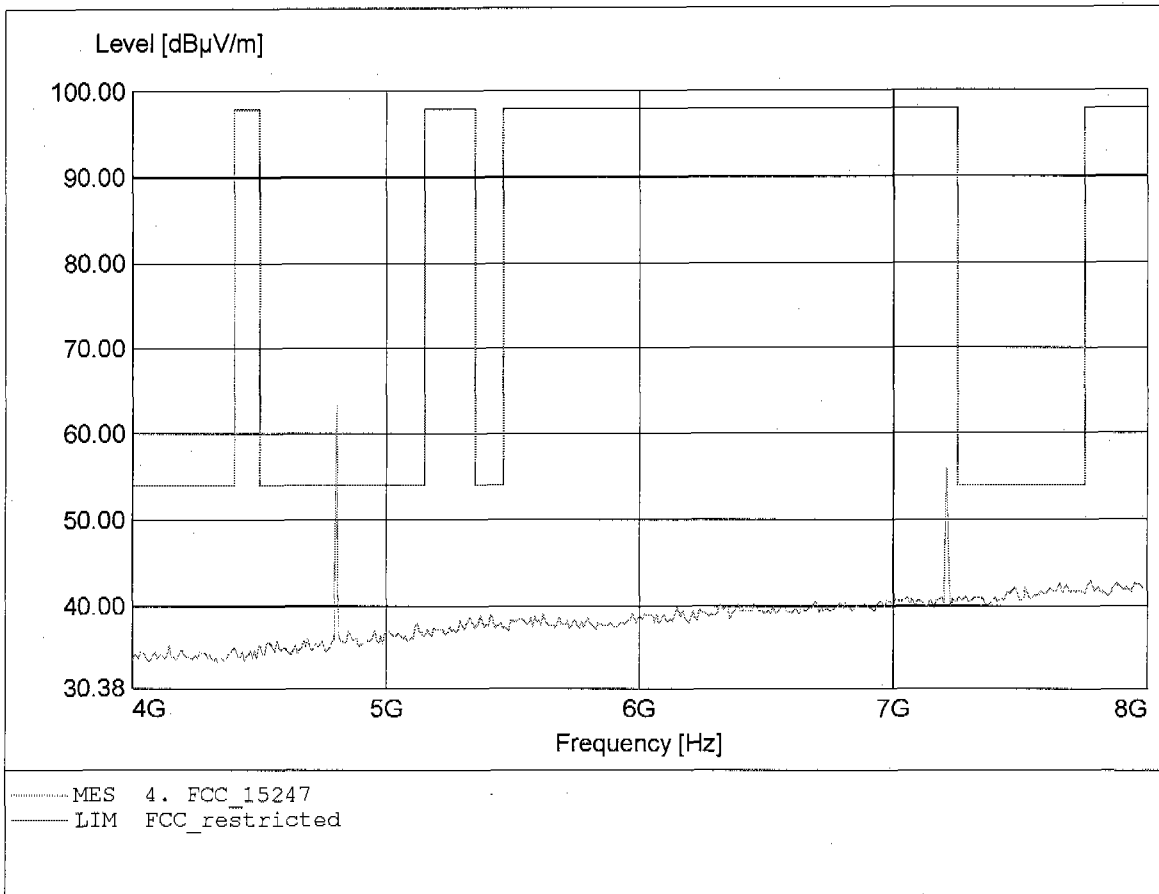


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 39.80dBµV/m, RBW: 1MHz

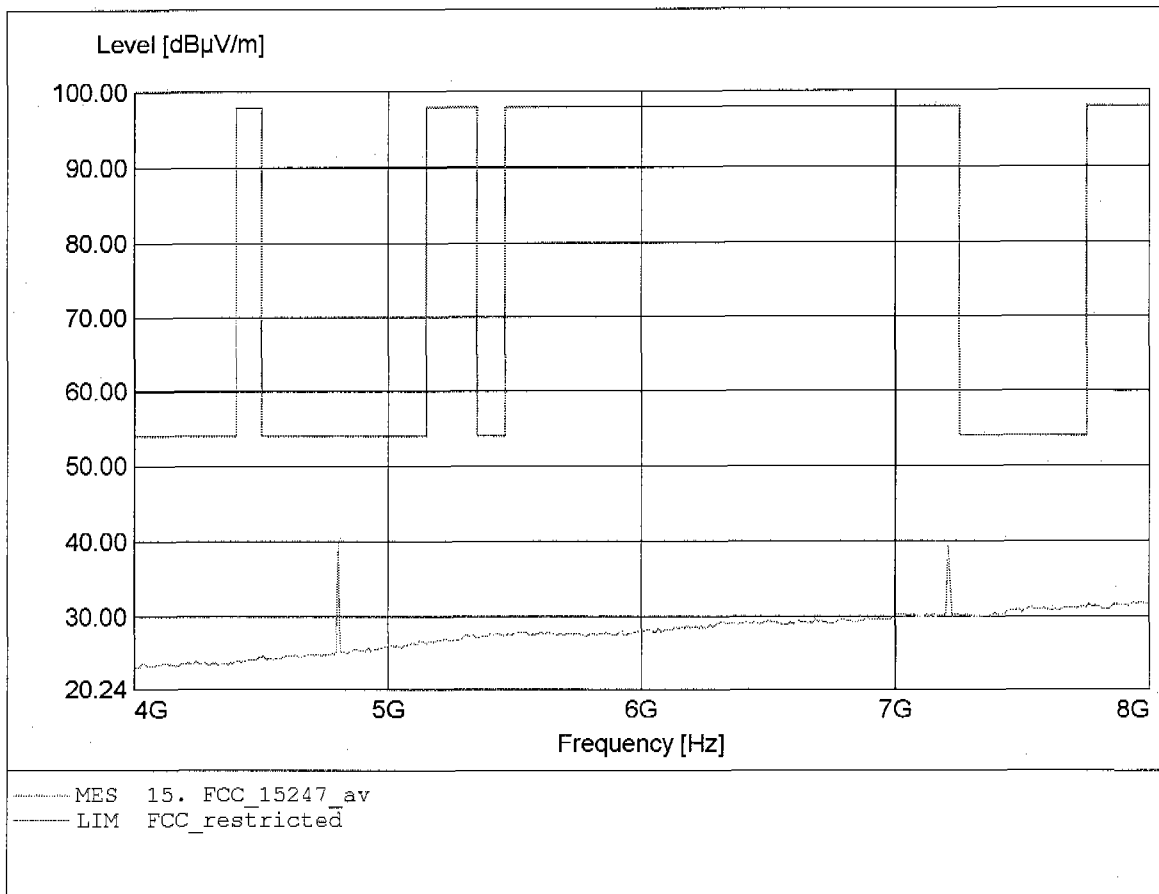


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 47
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 69.83dBµV/m, RBW: 1MHz

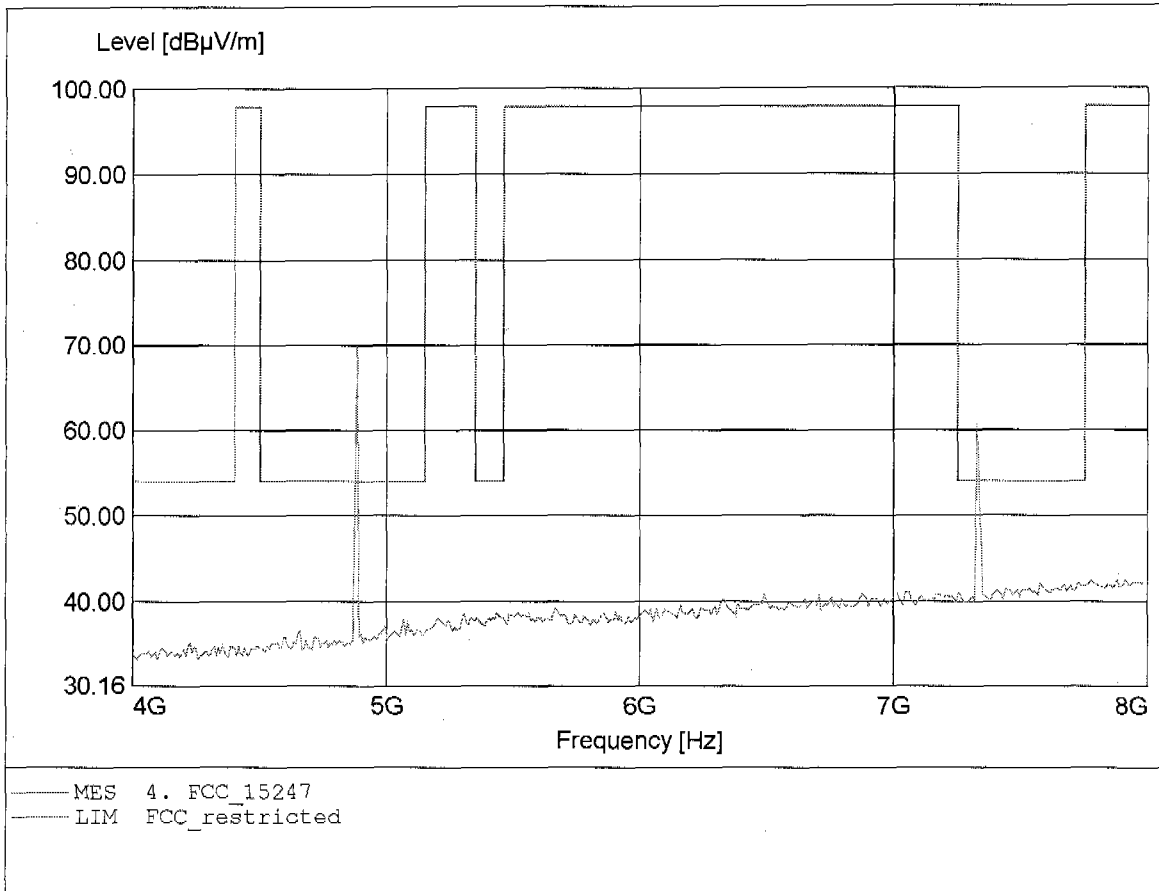


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 47
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 44.02dBµV/m, RBW: 1MHz

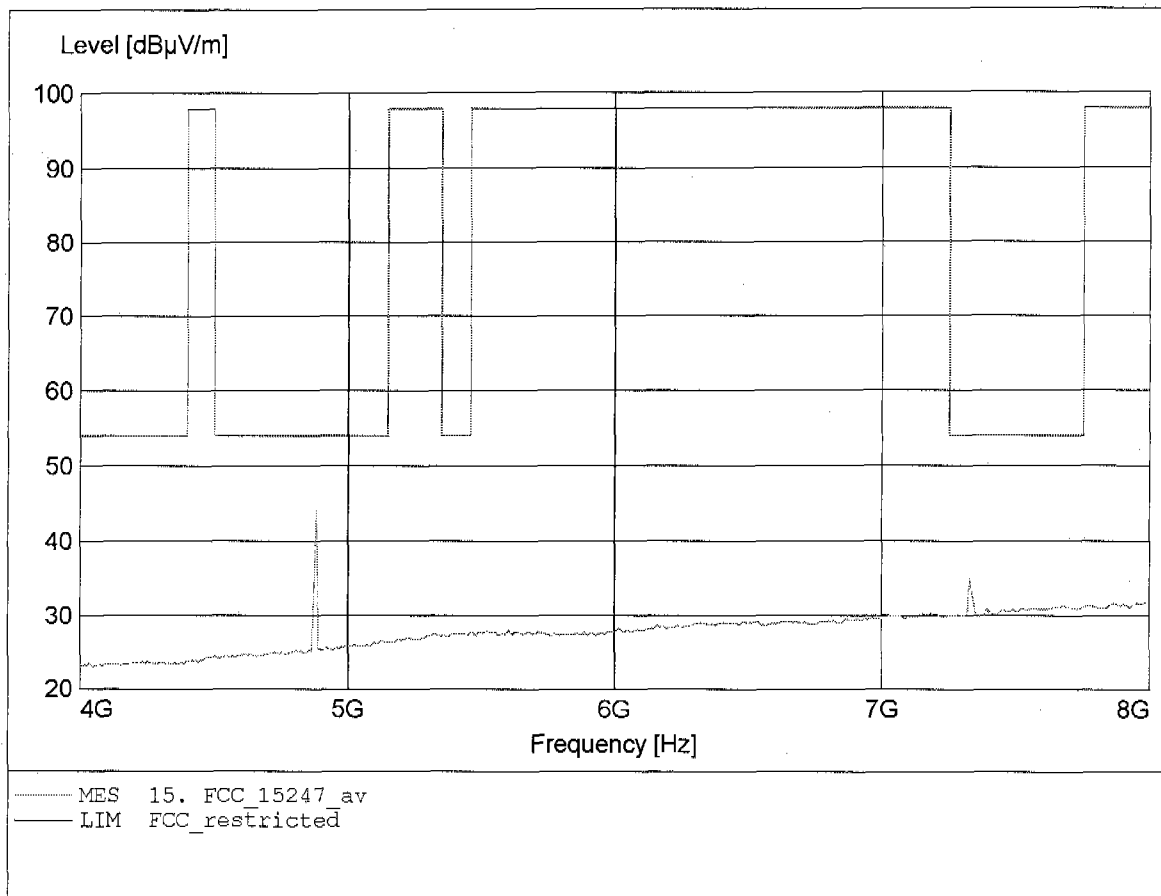


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 47
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 64.46dBµV/m, RBW: 1MHz

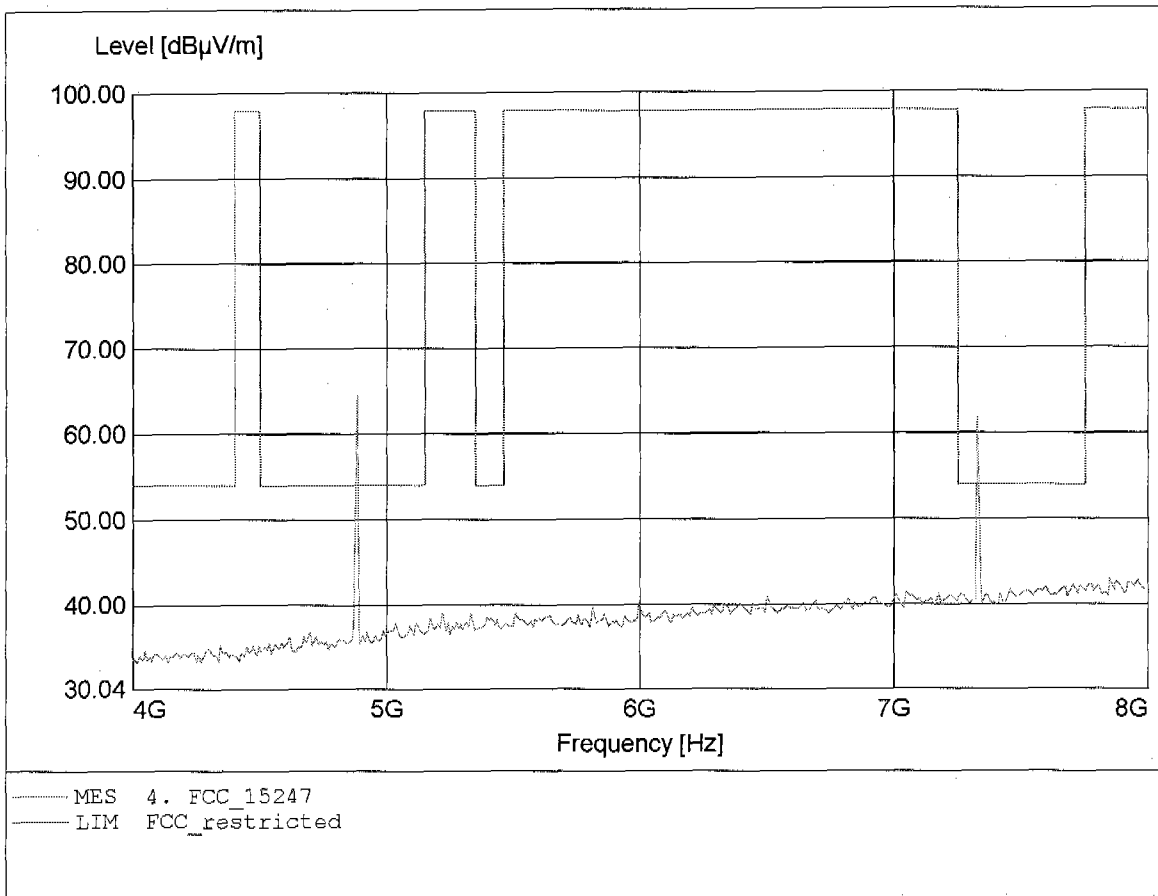


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 47
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 40.89dBµV/m, RBW: 1MHz

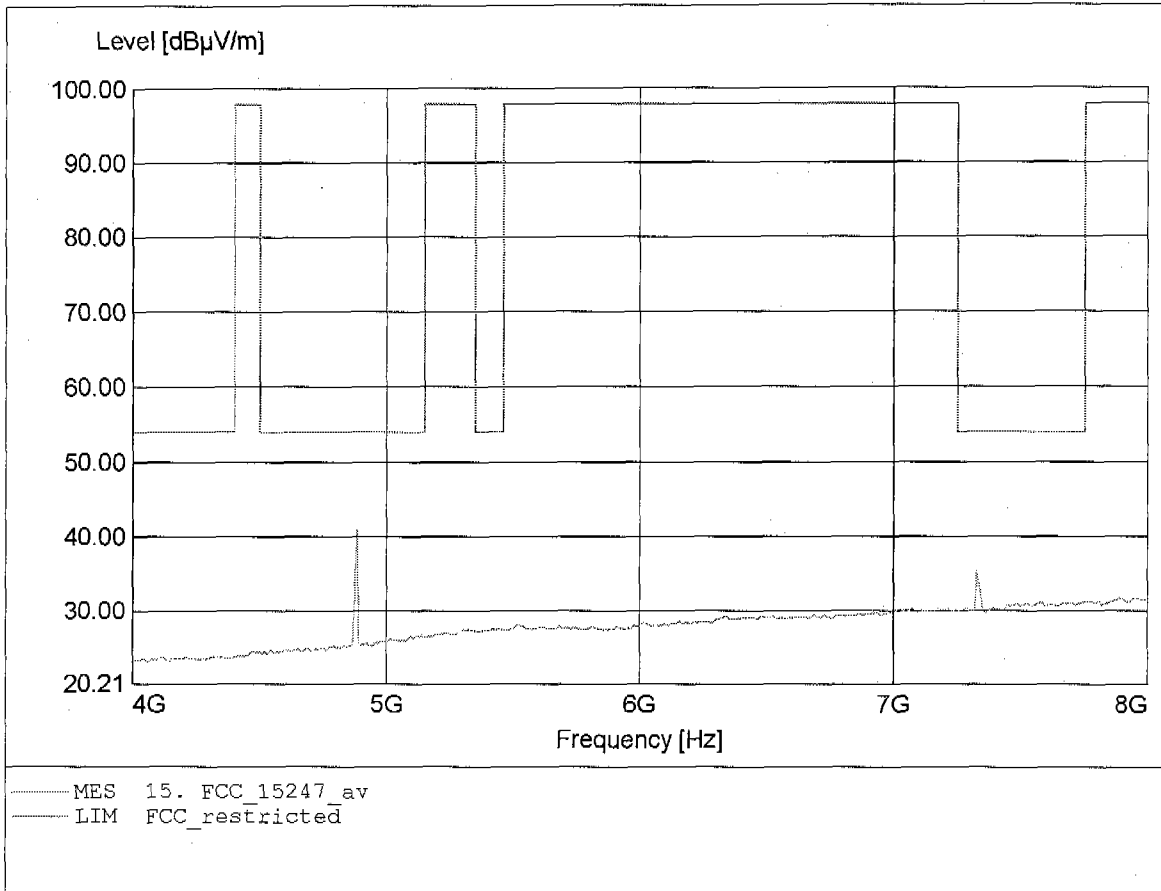


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 4.962GHz, Emax: 69.43dBµV/m, RBW: 1MHz

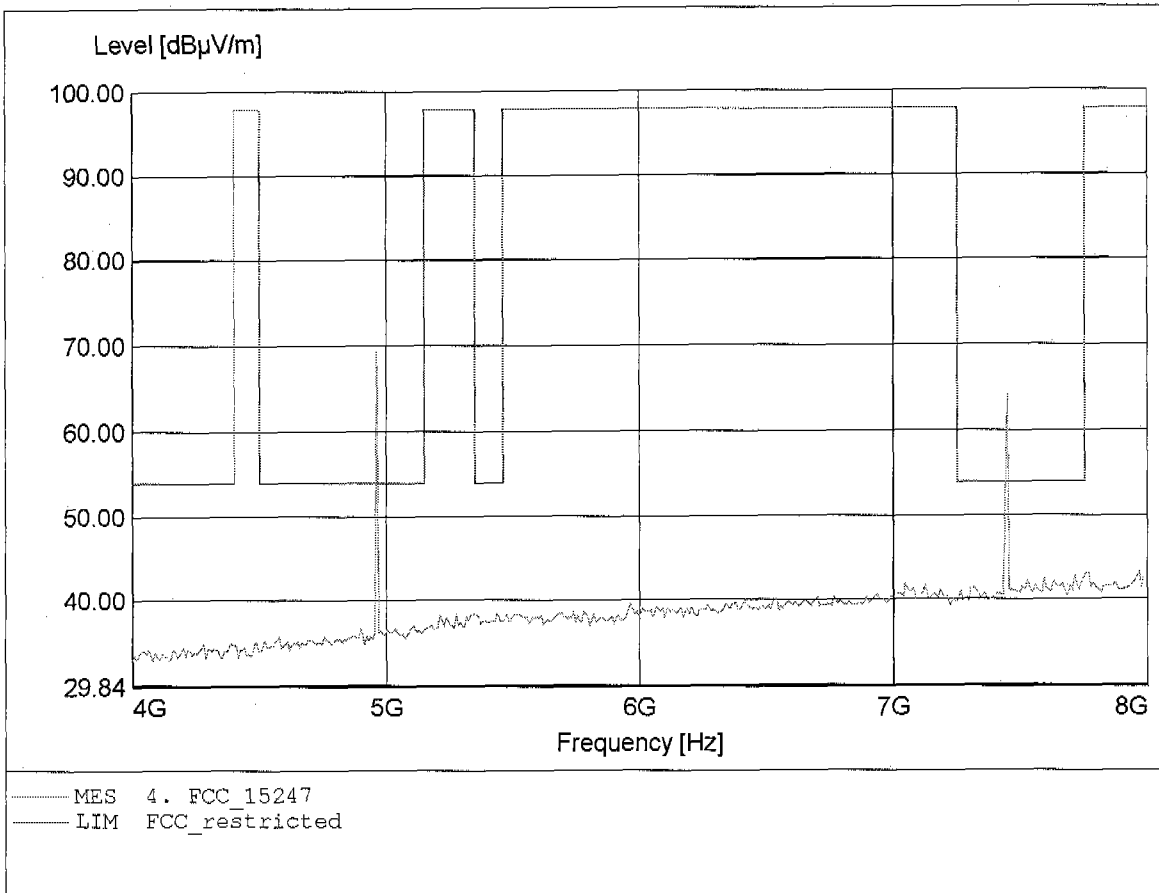


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.447GHz, Emax: 40.35dBµV/m, RBW: 1MHz

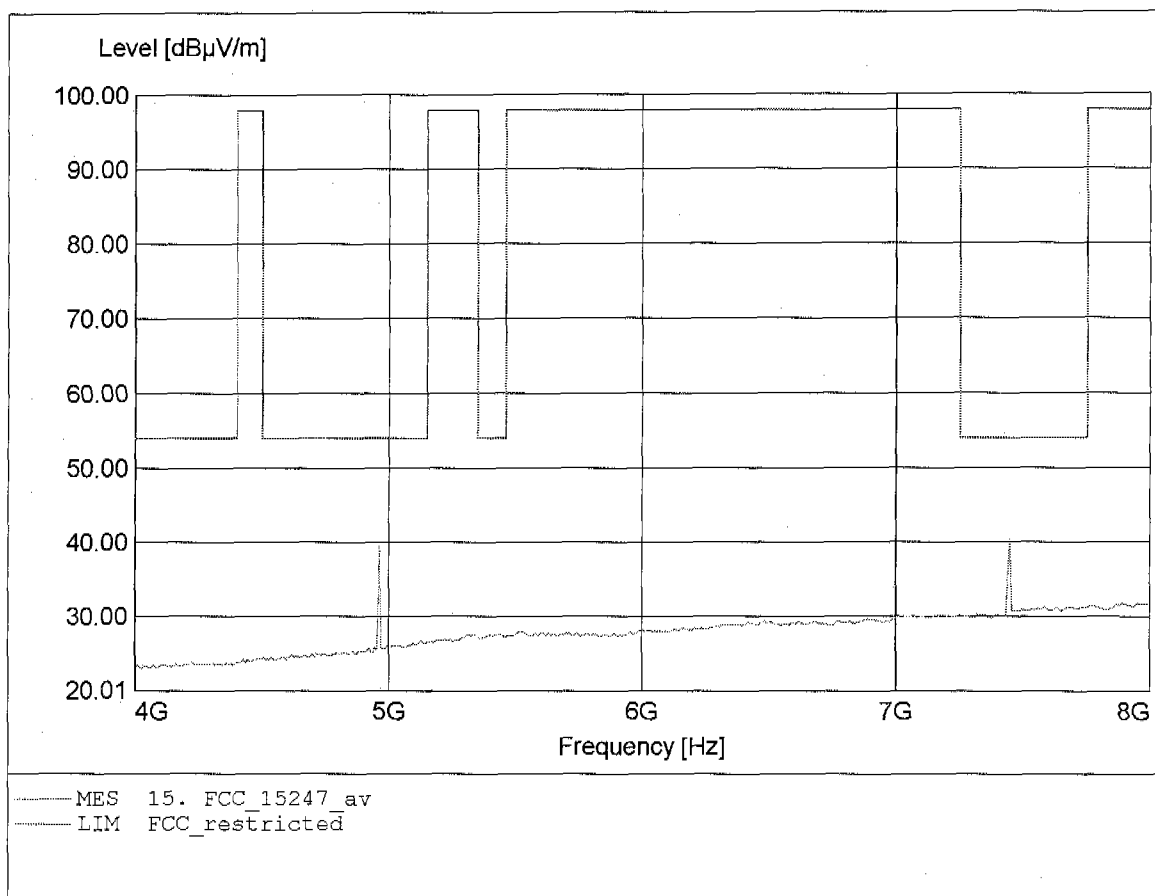


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 4.962GHz, Emax: 66.69dBµV/m, RBW: 1MHz

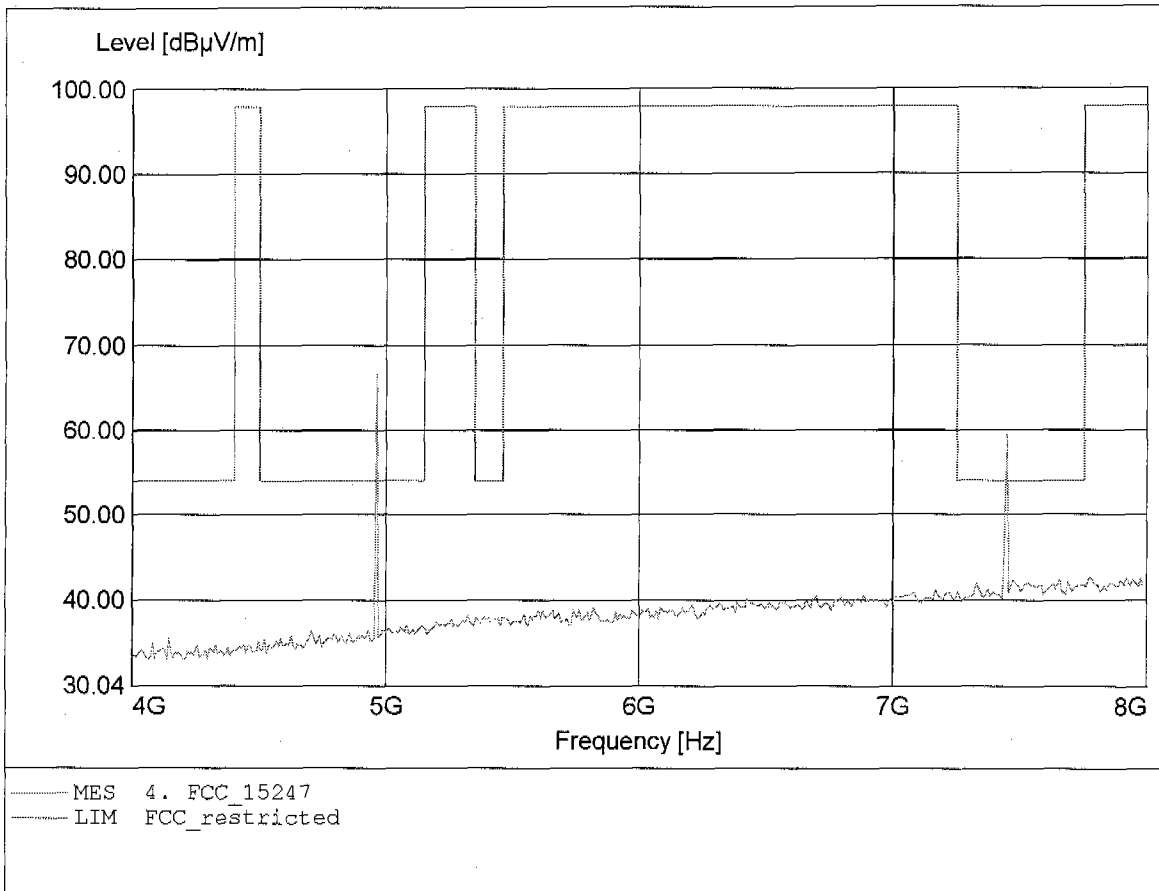


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 4.962GHz, Emax: 42.90dBµV/m, RBW: 1MHz

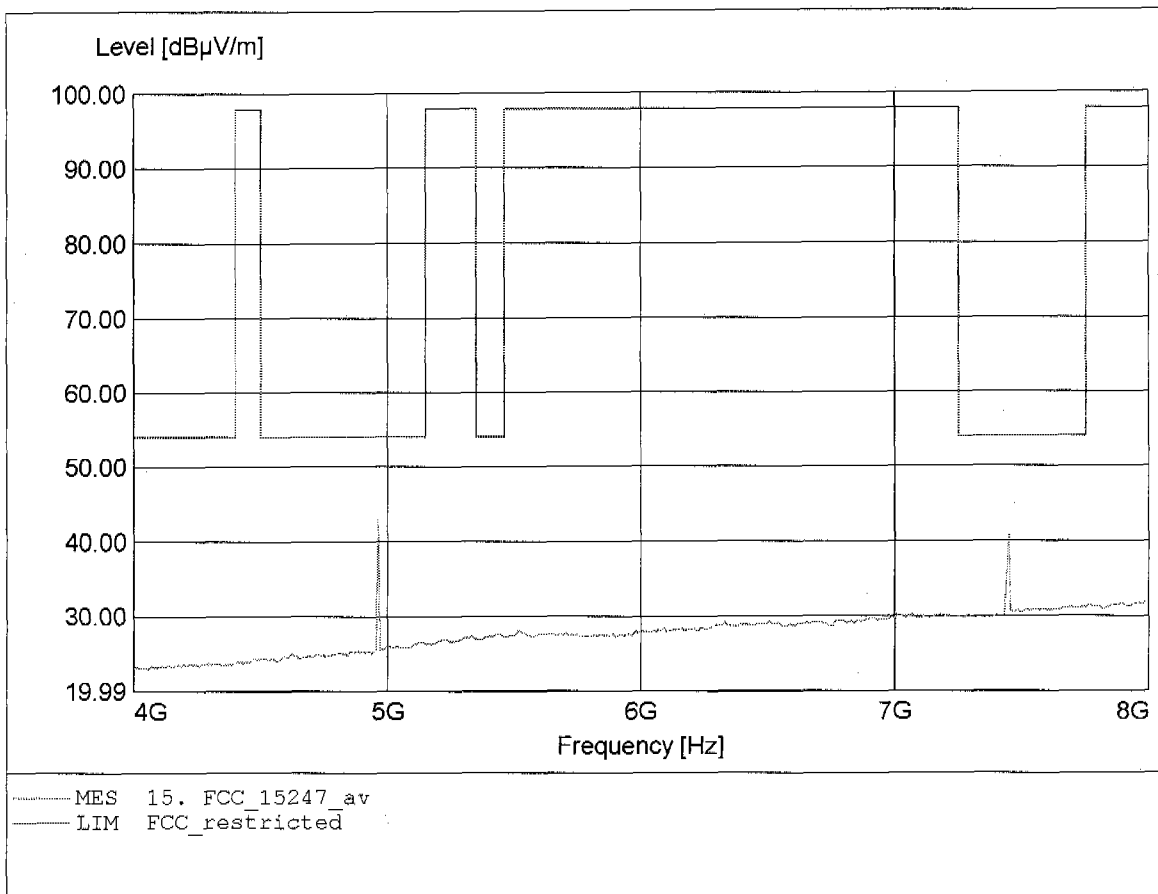


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.603GHz, Emax: 55.44dBµV/m, RBW: 1MHz

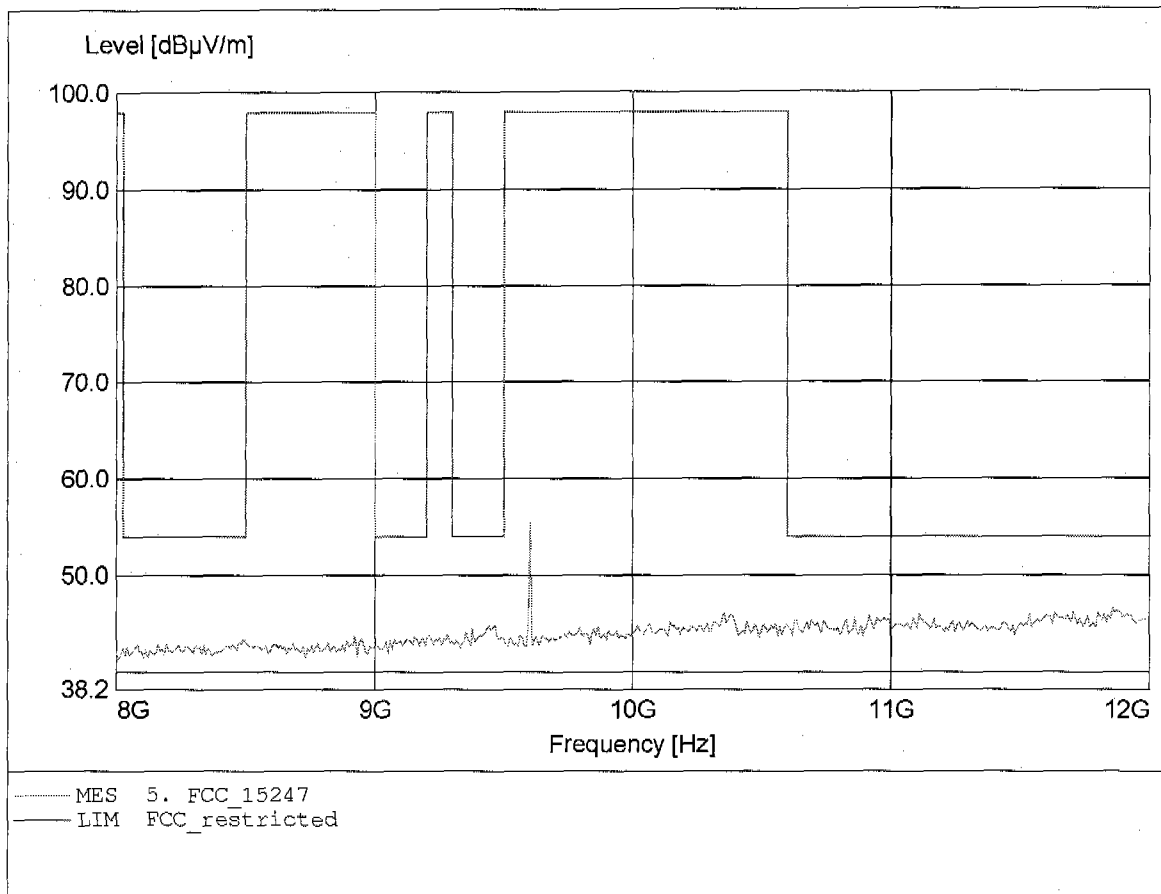


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.603GHz, Emax: 51.08dBµV/m, RBW: 1MHz

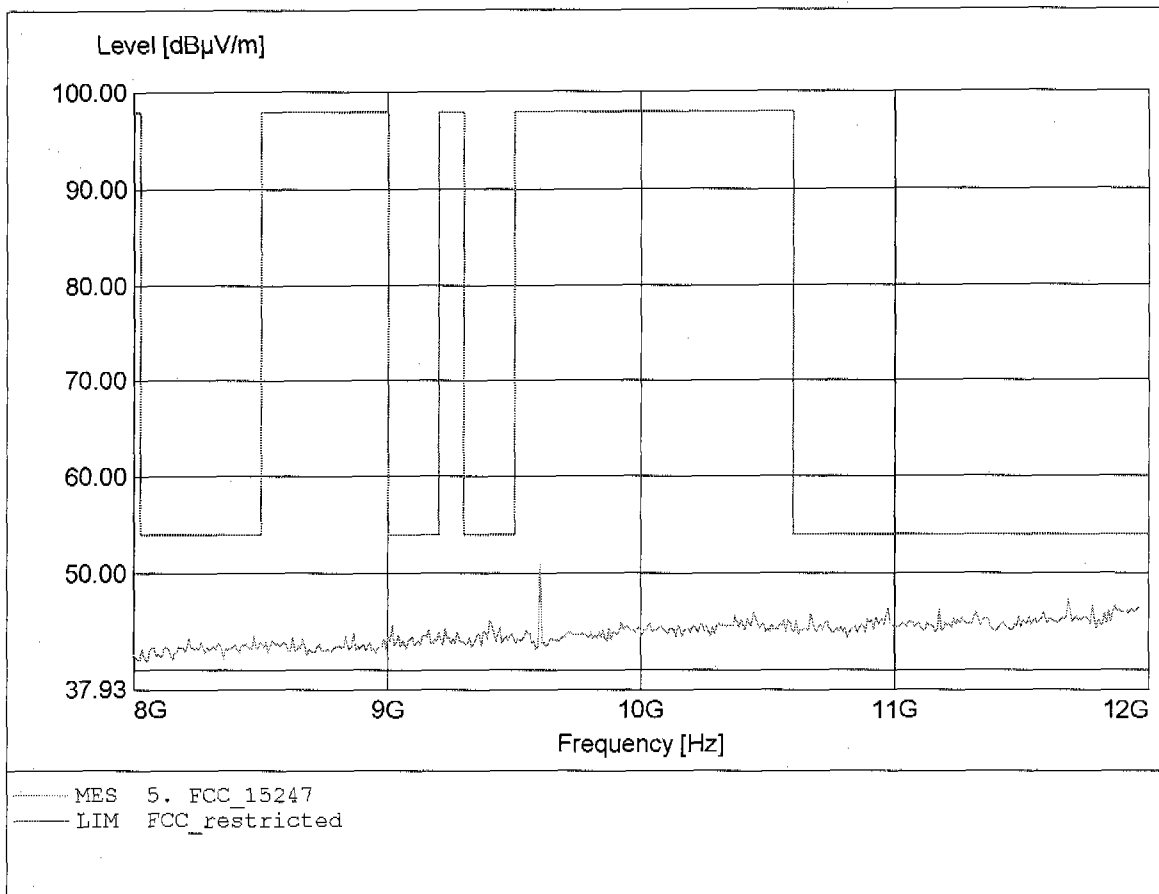


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 47
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.764GHz, Emax: 58.28dBµV/m, RBW: 1MHz

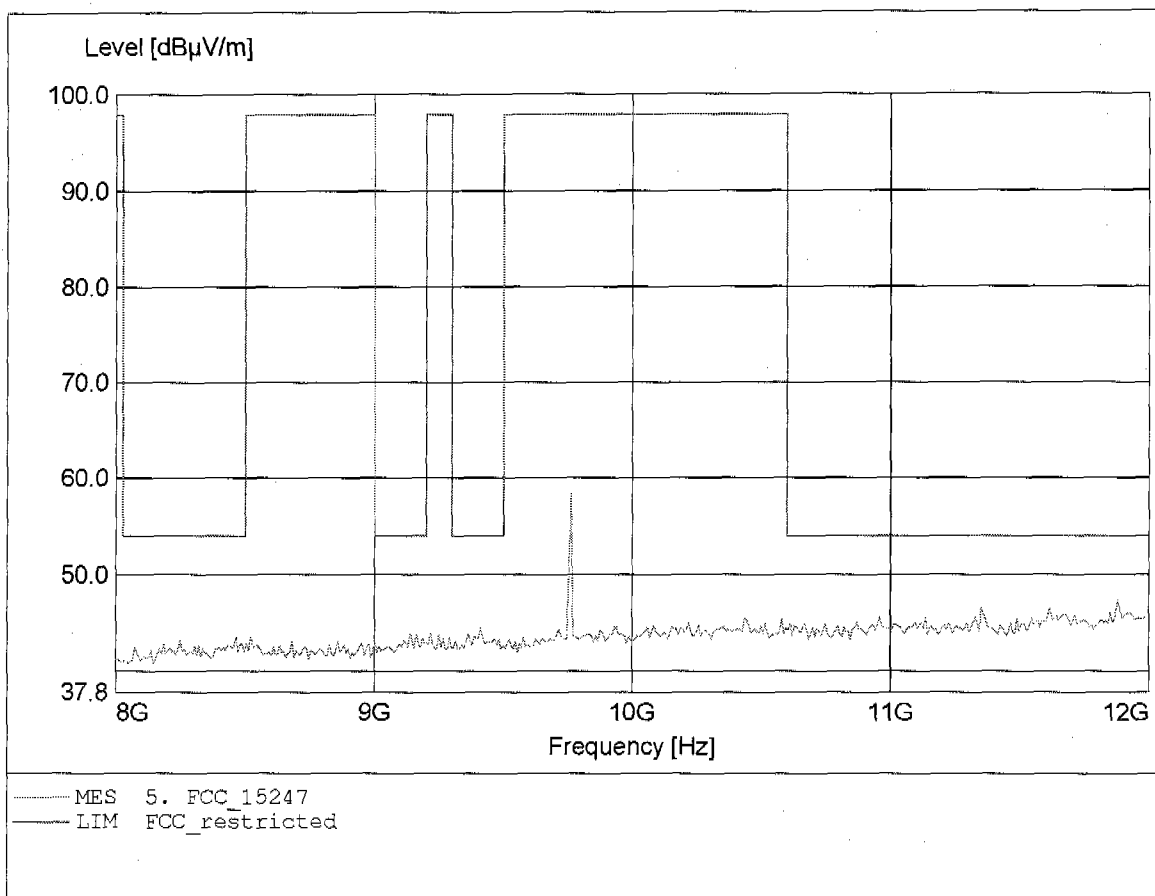


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 47
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.764GHz, Emax: 59.48dBµV/m, RBW: 1MHz

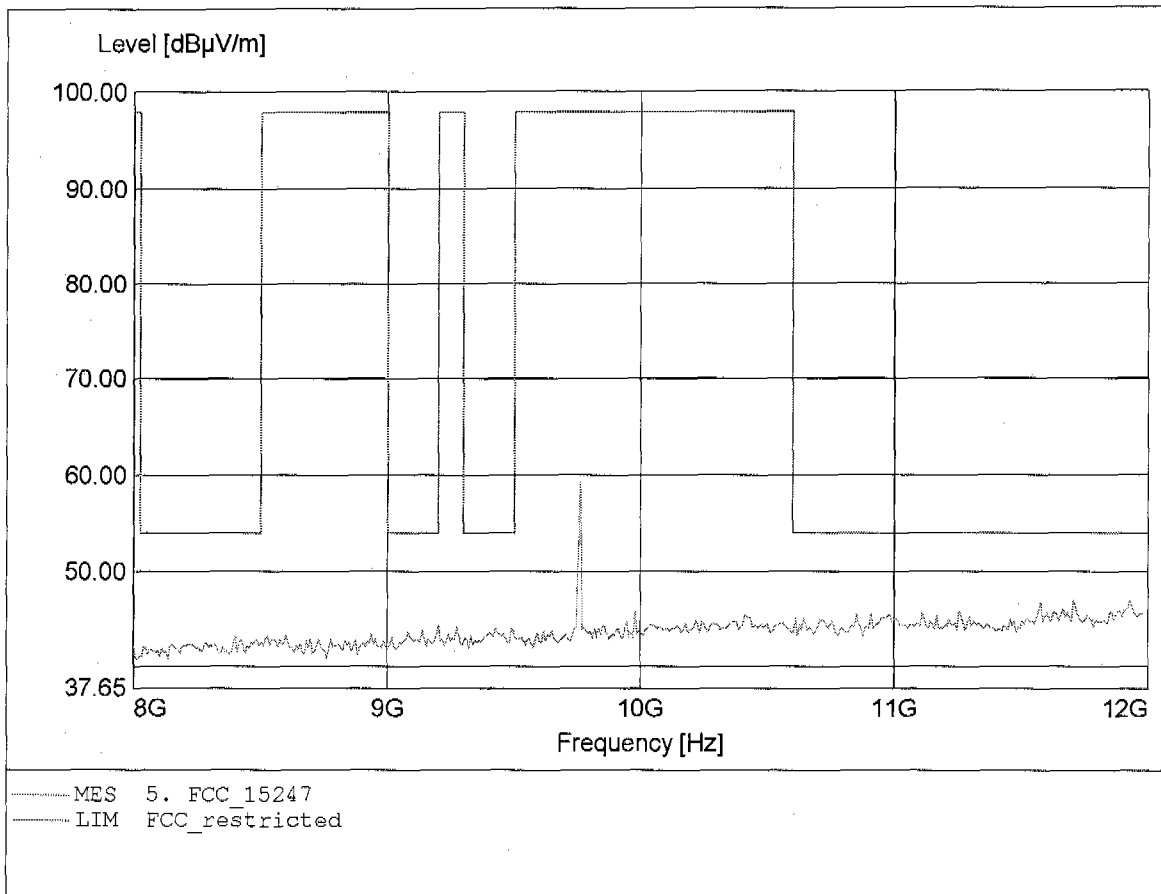


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.932GHz, Emax: 57.89dBµV/m, RBW: 1MHz

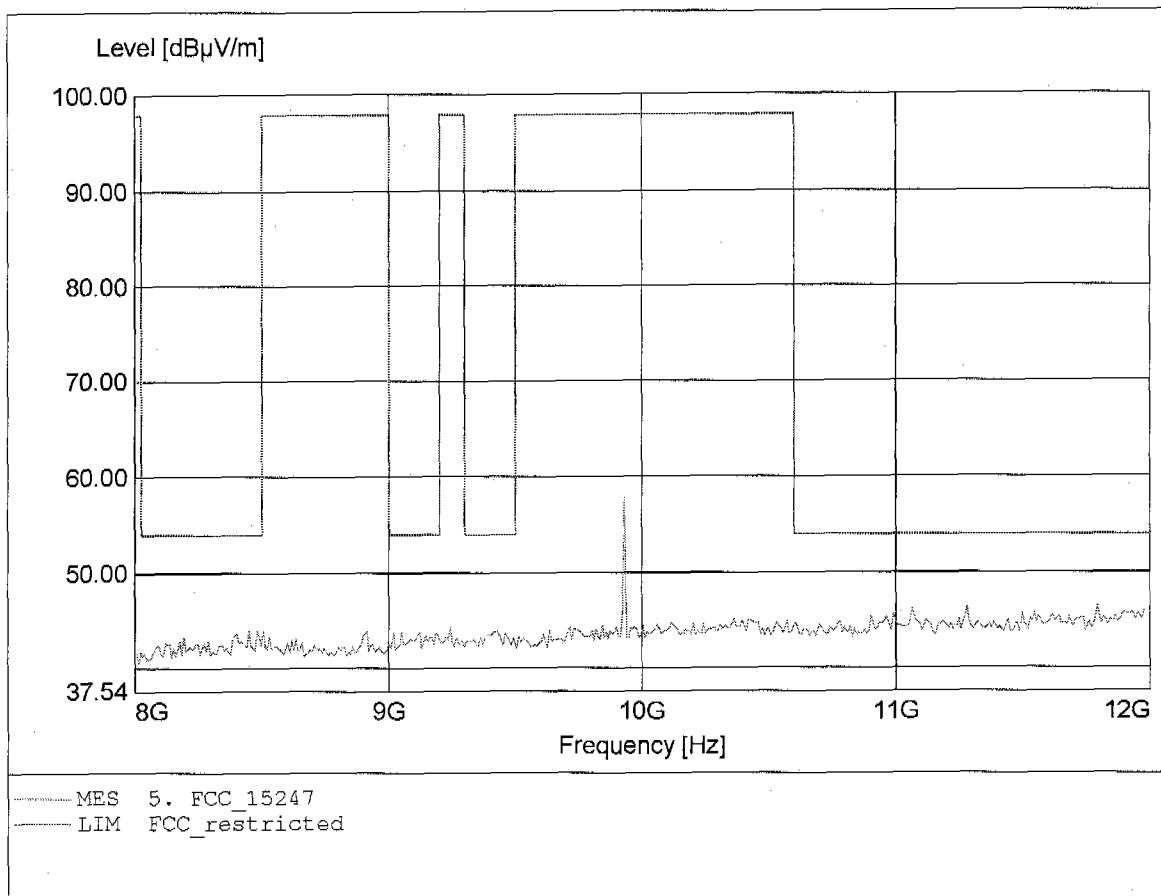


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.932GHz, Emax: 56.17dBµV/m, RBW: 1MHz

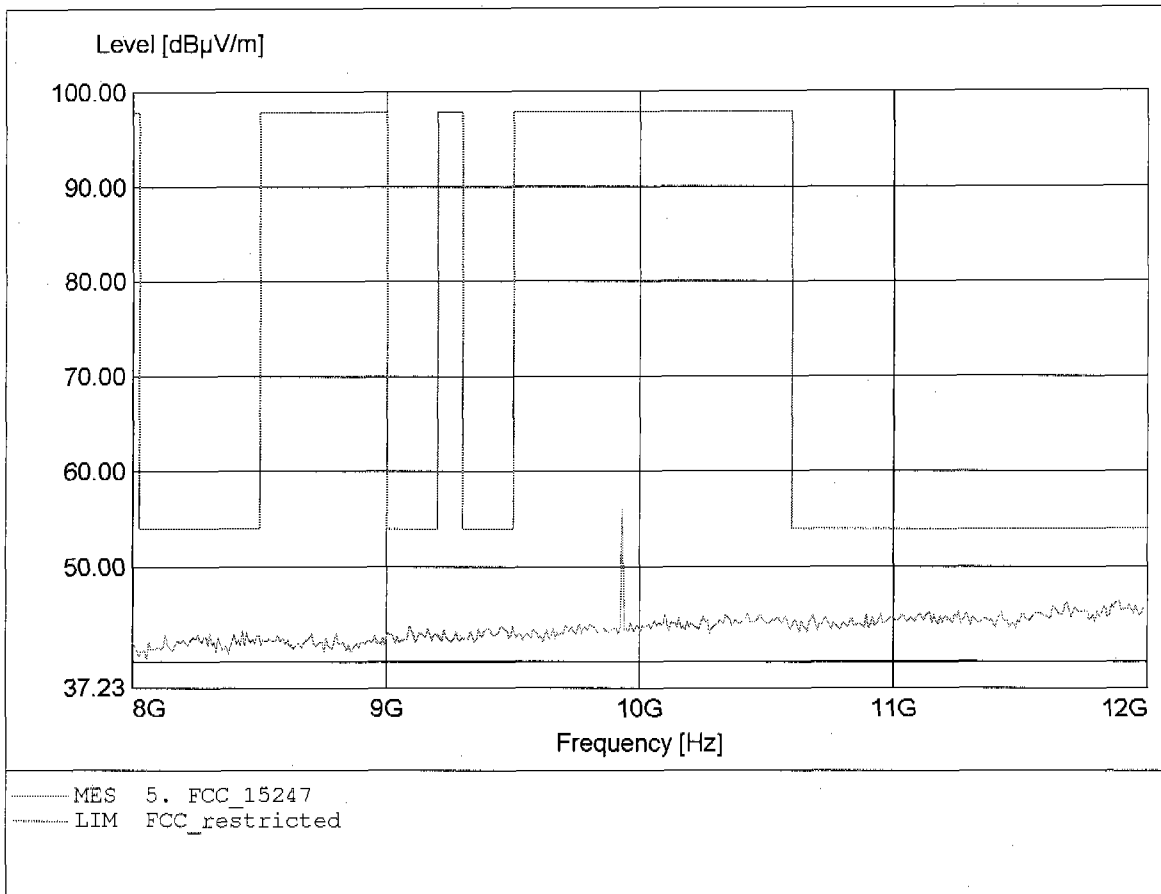


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 16.136GHz, Emax: 51.76dBµV/m, RBW: 1MHz

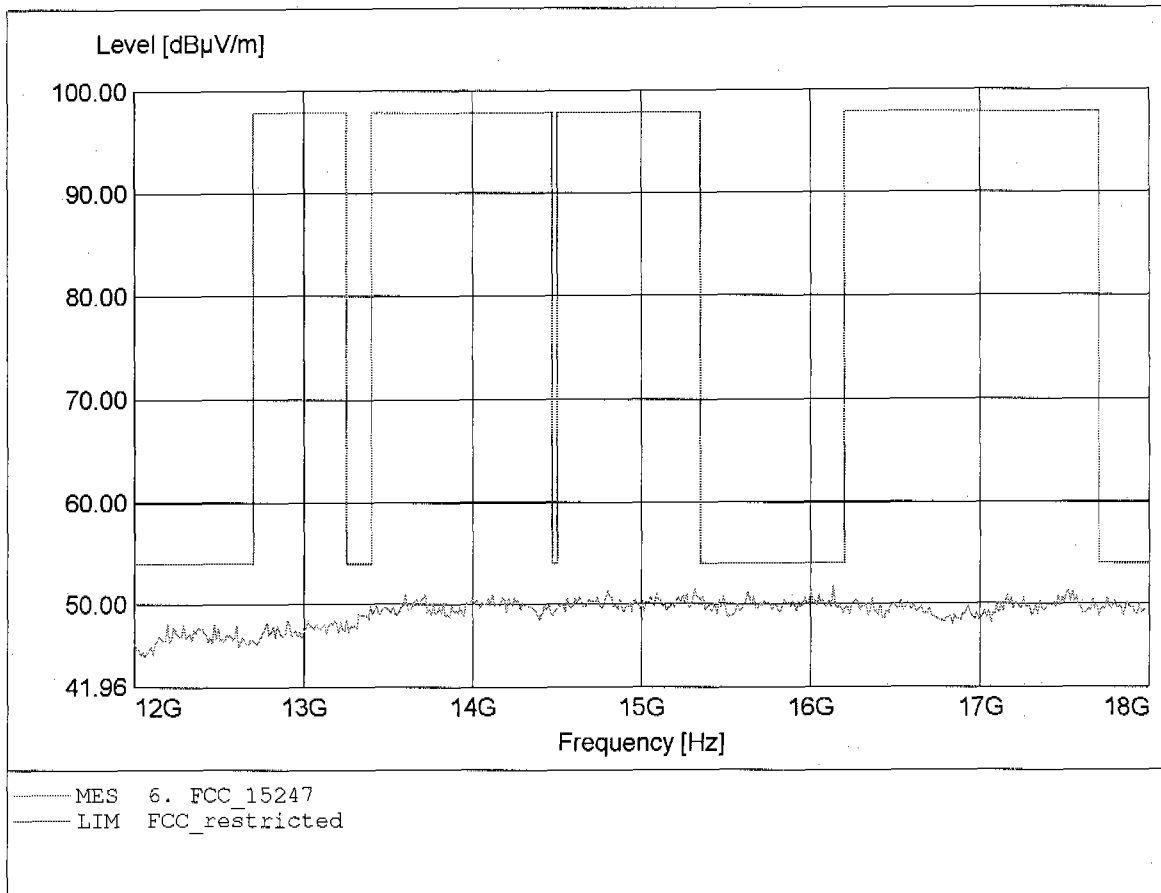


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 15.114GHz, Emax: 52.32dBµV/m, RBW: 1MHz

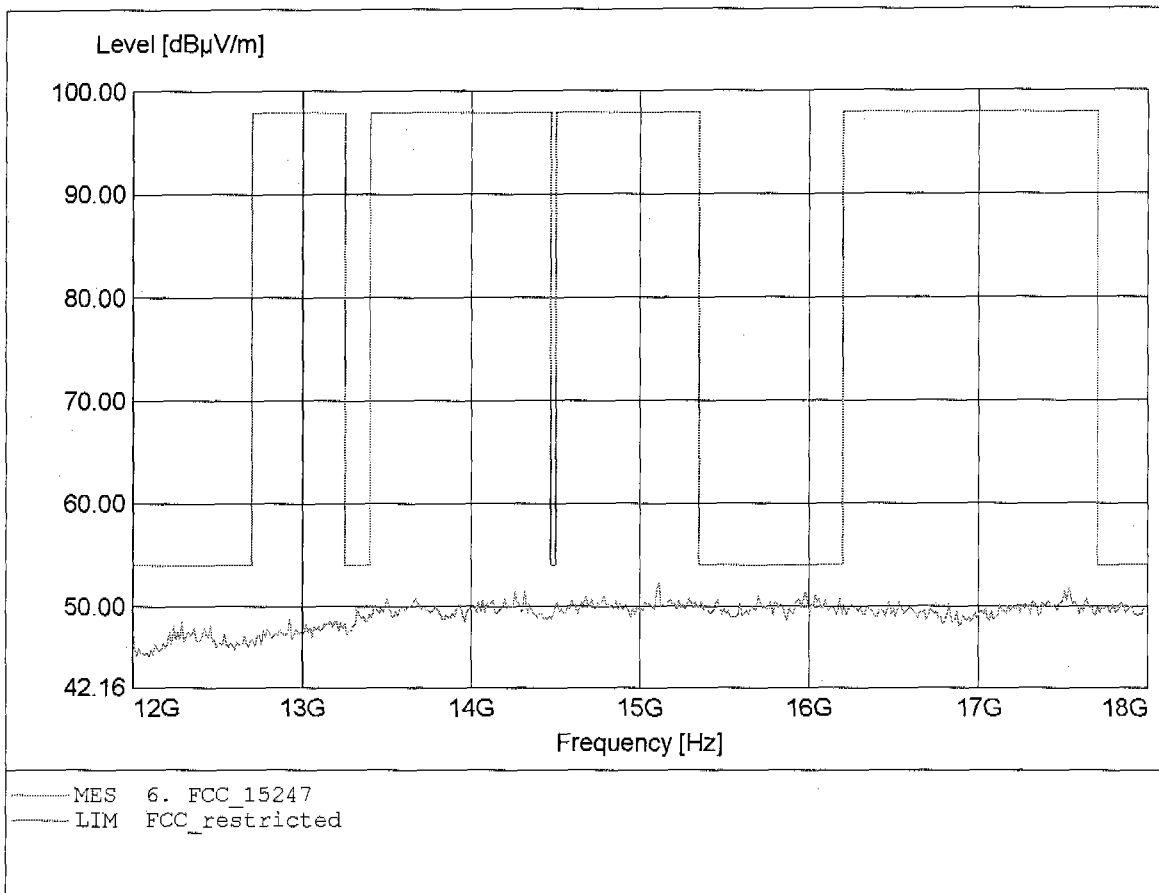


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 47
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 12.204GHz, Emax: 51.94dBµV/m, RBW: 1MHz

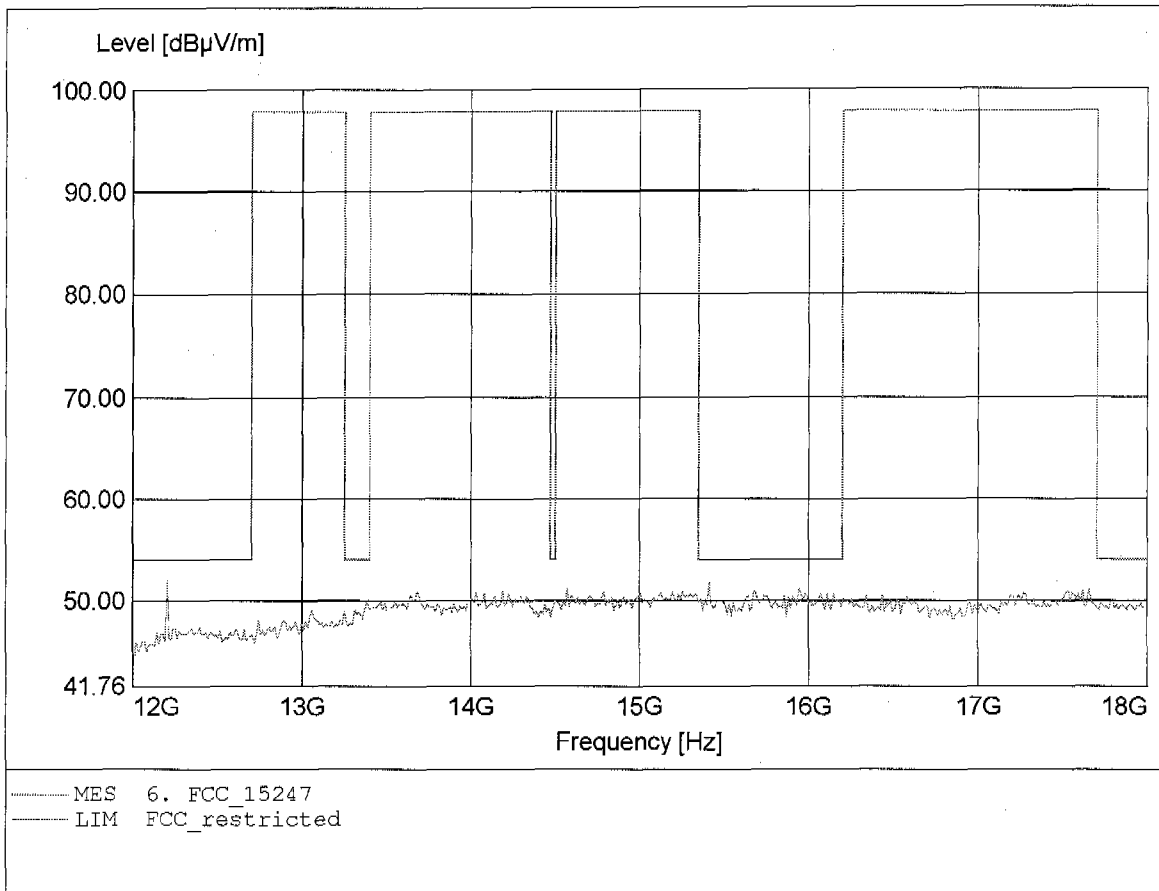


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 47
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 12.204GHz, Emax: 58.08dBµV/m, RBW: 1MHz

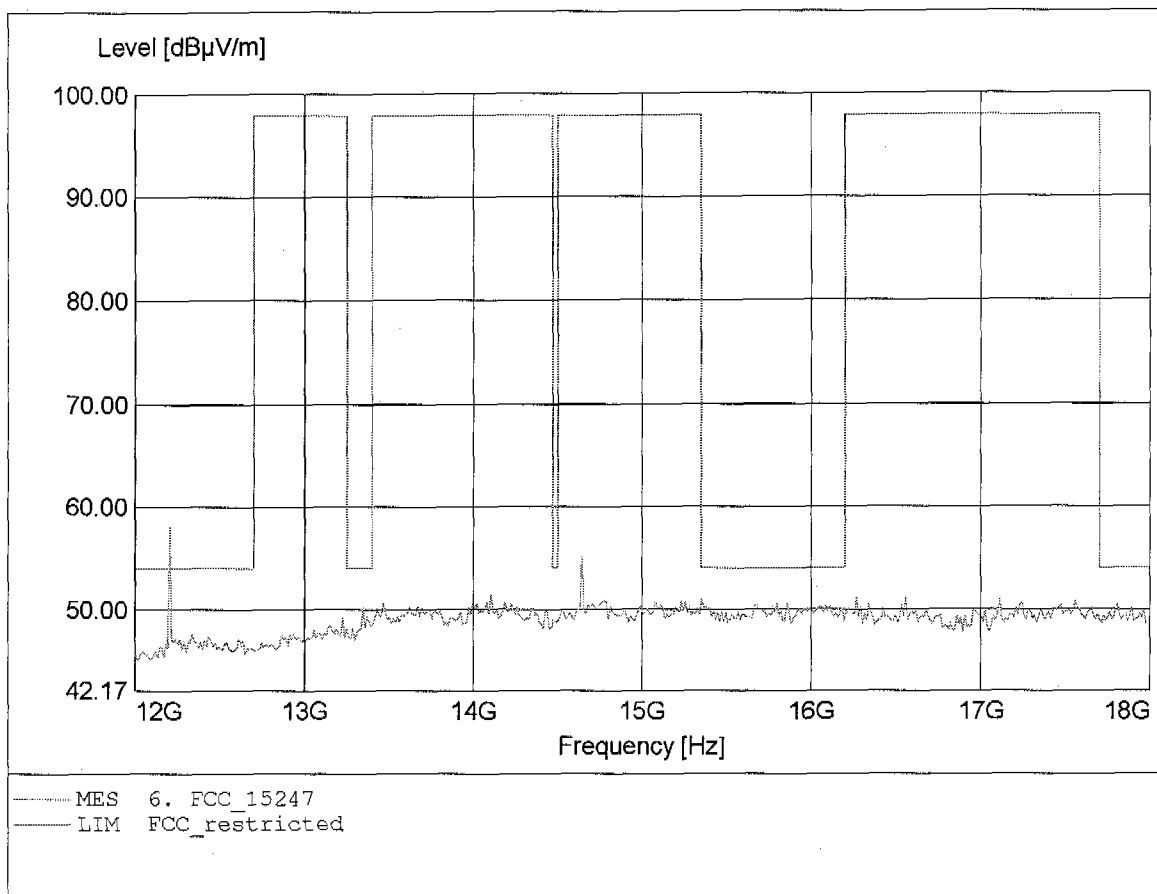


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 47
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.531GHz, Emax: 39.96dBµV/m, RBW: 1MHz

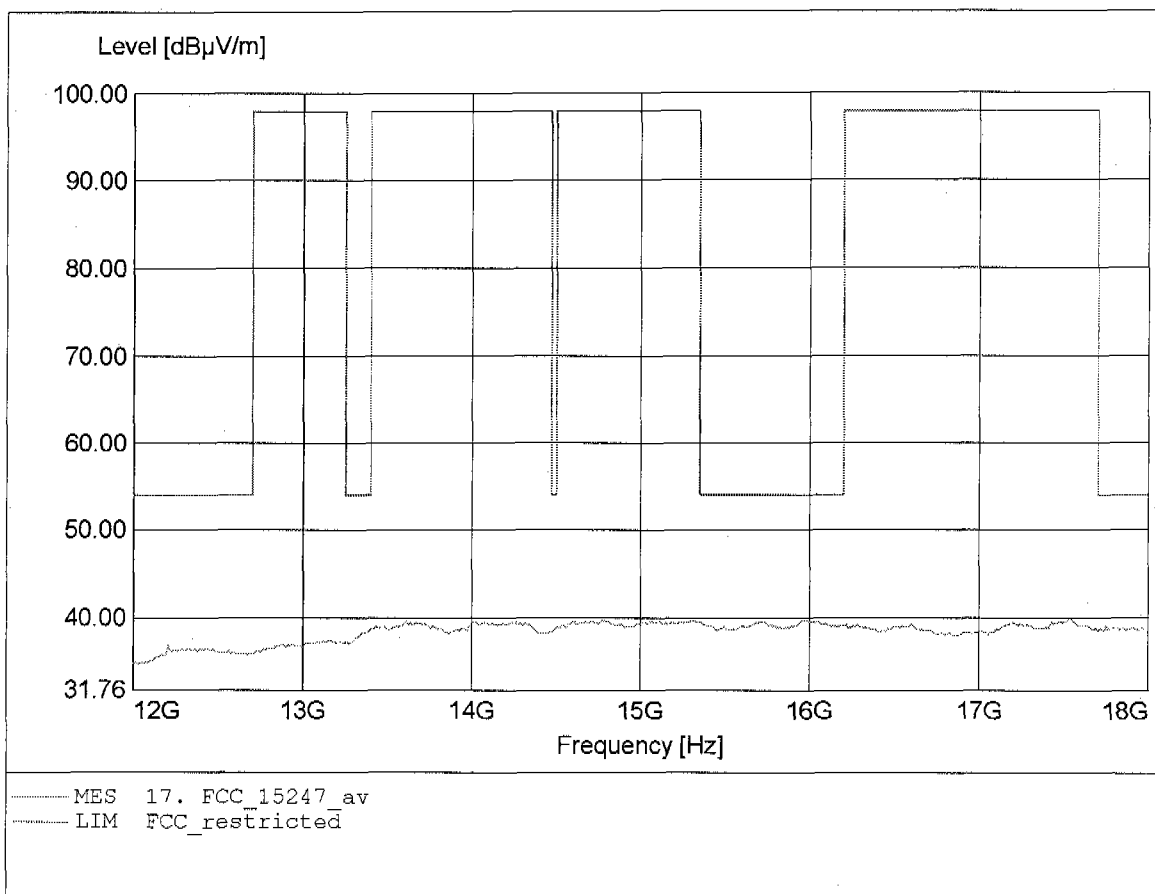


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 13.804GHz, Emax: 51.31dBµV/m, RBW: 1MHz

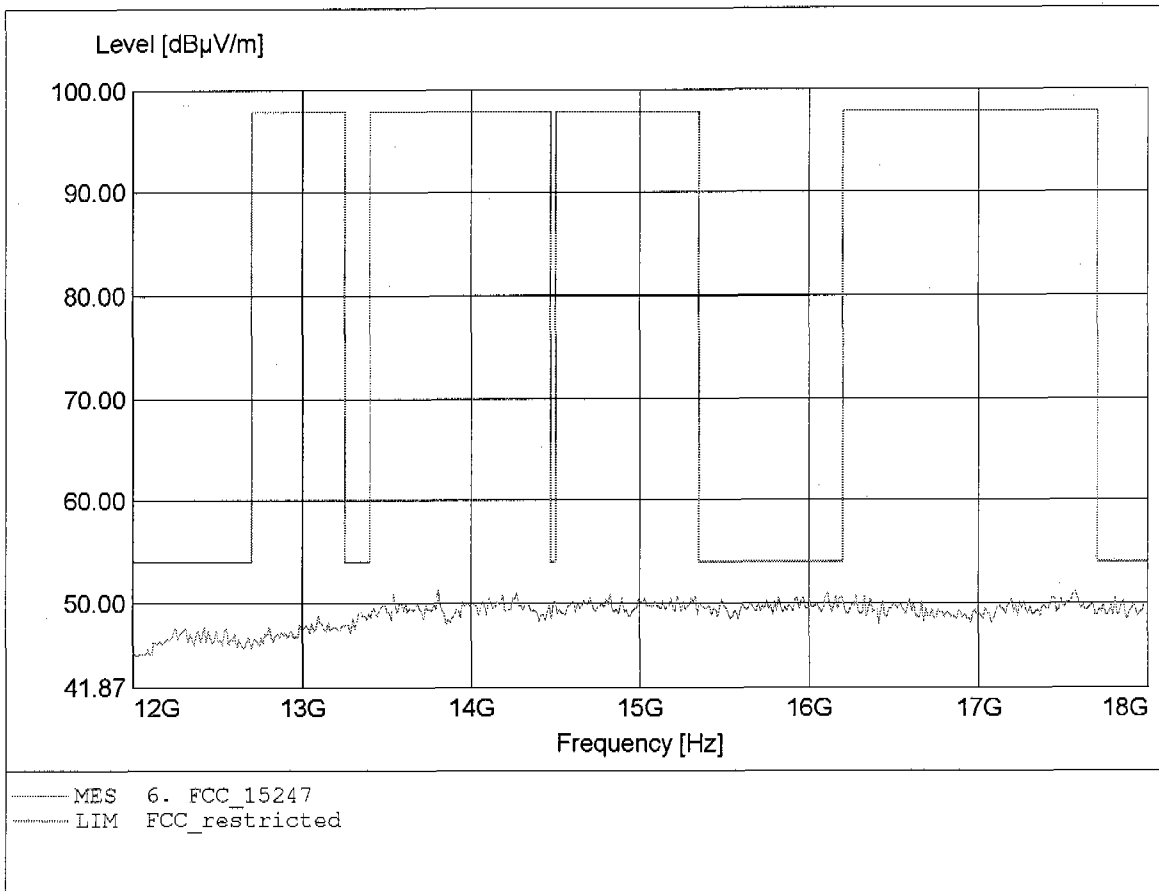


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 14.898GHz, Emax: 52.74dBµV/m, RBW: 1MHz

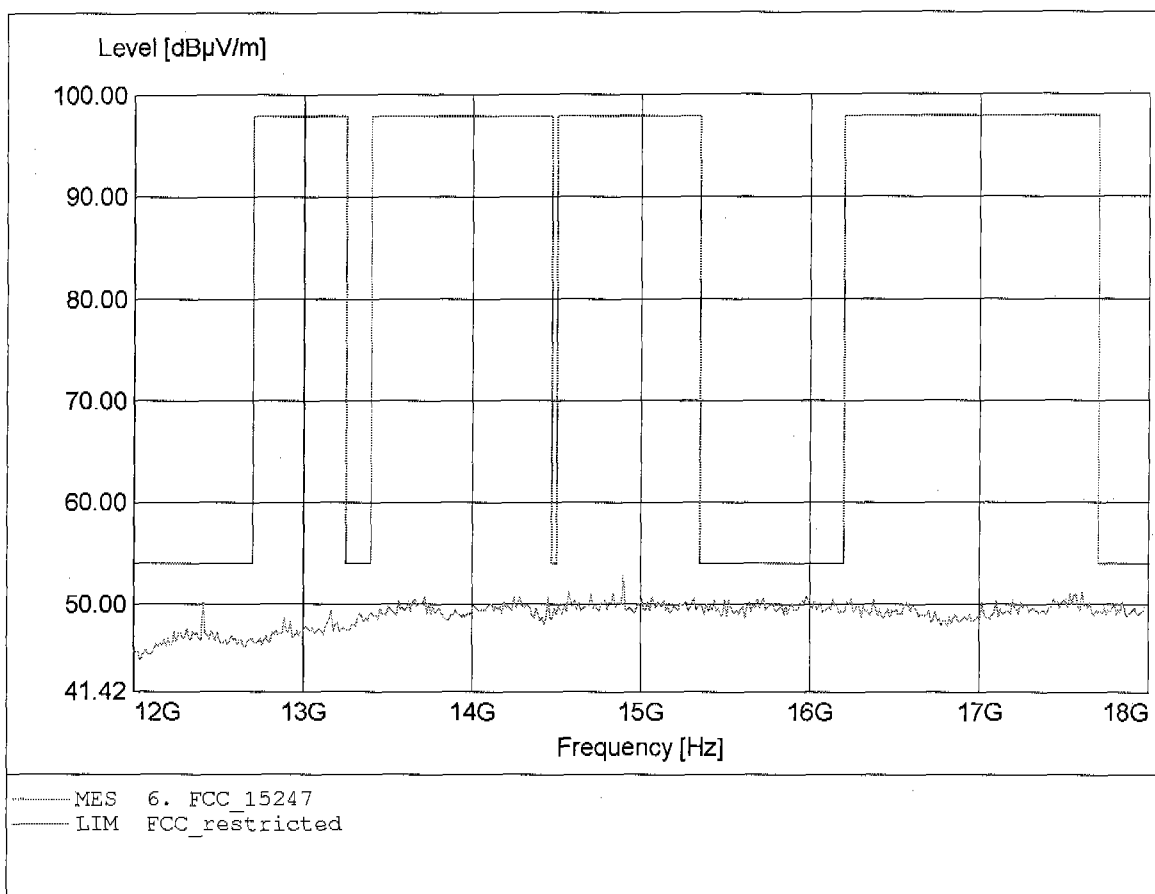


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.159GHz, Emax: 45.58dBµV/m, RBW: 1MHz

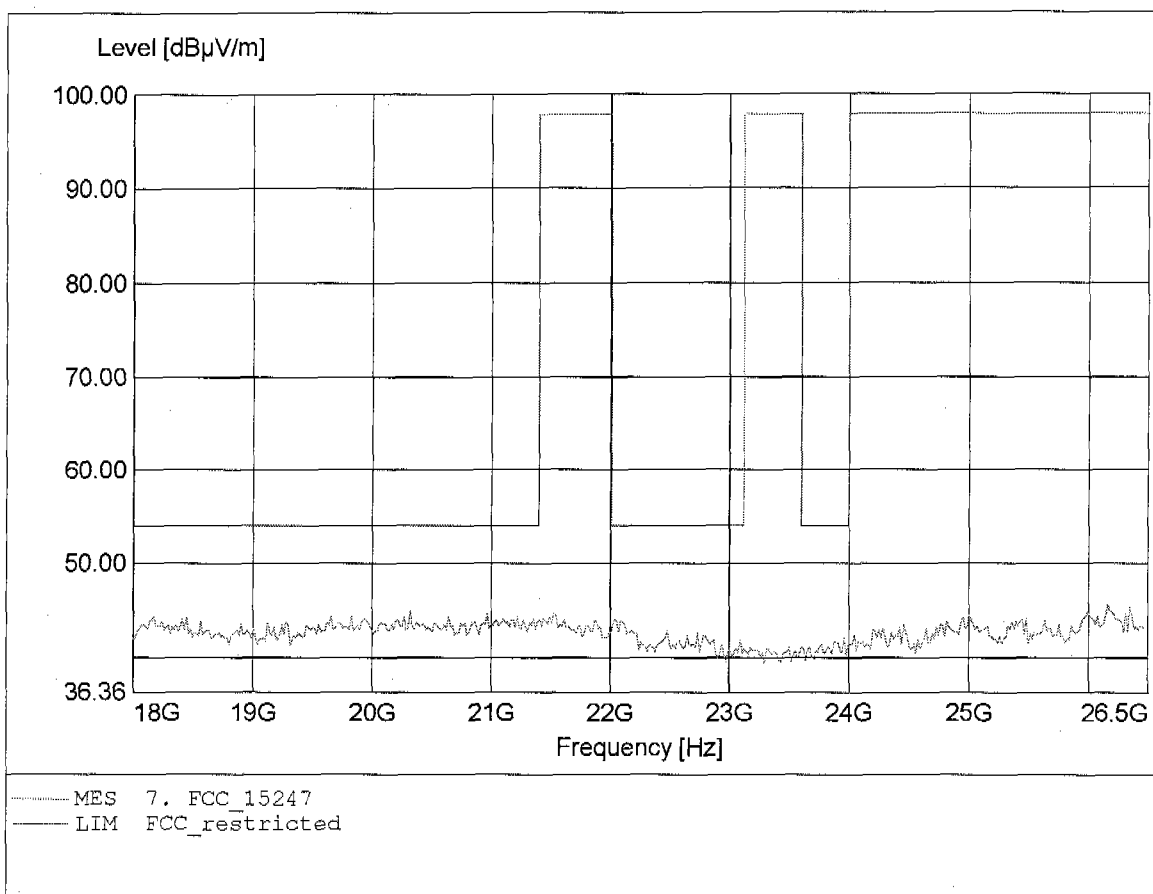


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 21.901GHz, Emax: 45.87dBµV/m, RBW: 1MHz

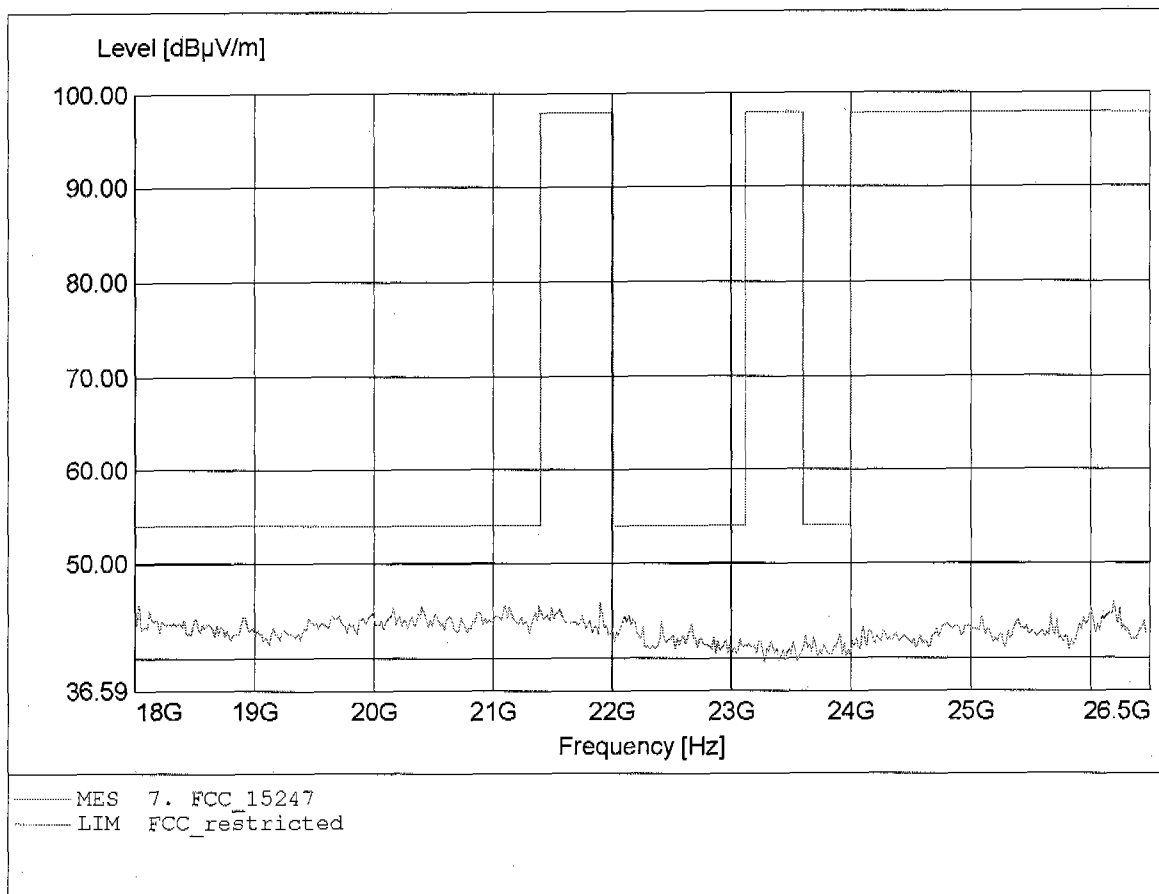


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 47
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 21.509GHz, Emax: 45.83dBµV/m, RBW: 1MHz

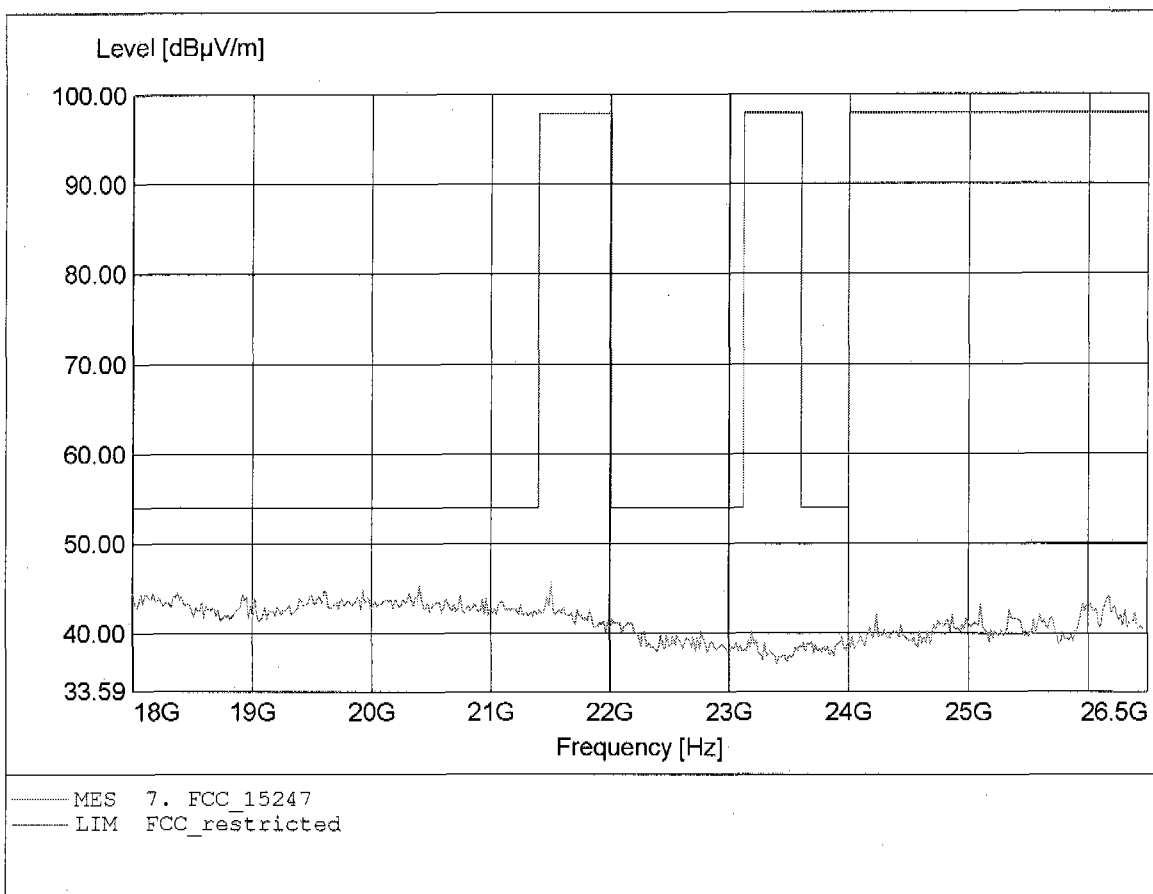


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 47
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.176GHz, Emax: 44.79dBµV/m, RBW: 1MHz

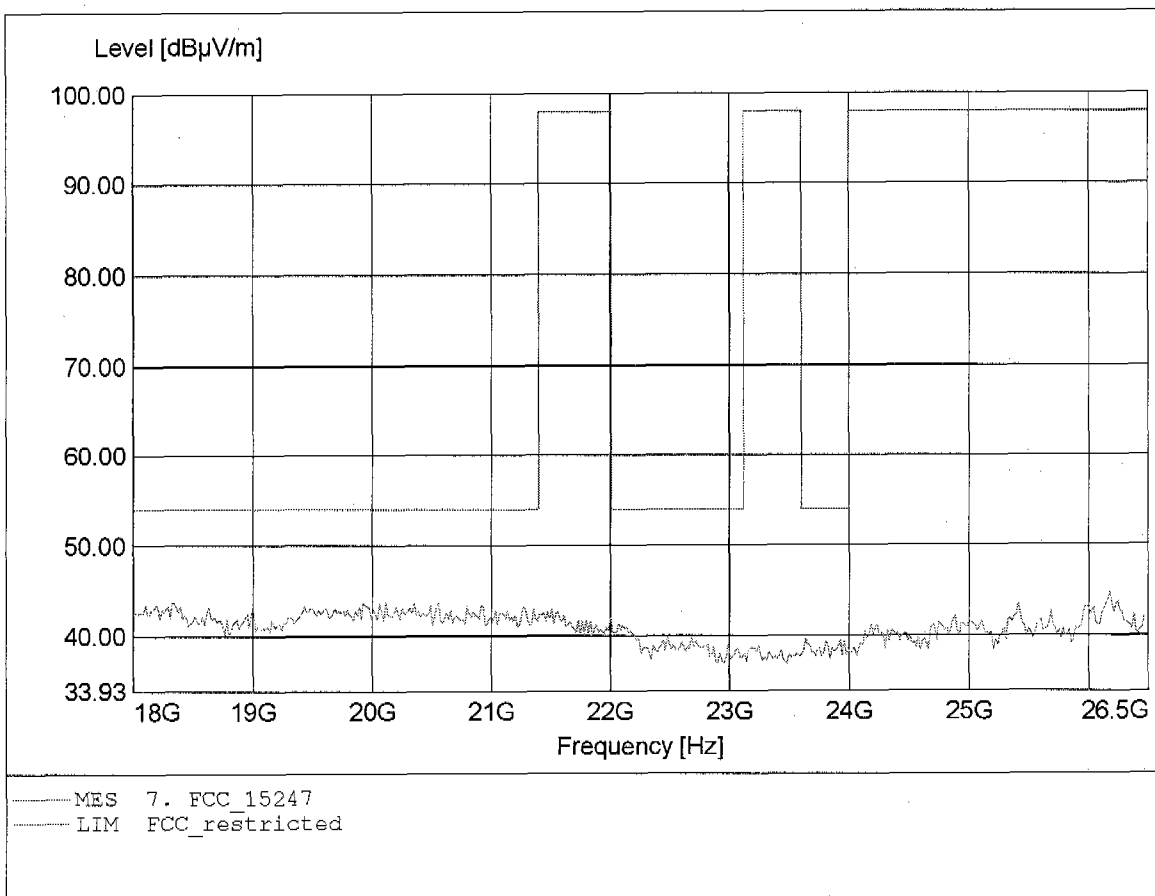


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 25.972GHz, Emax: 43.76dBµV/m, RBW: 1MHz

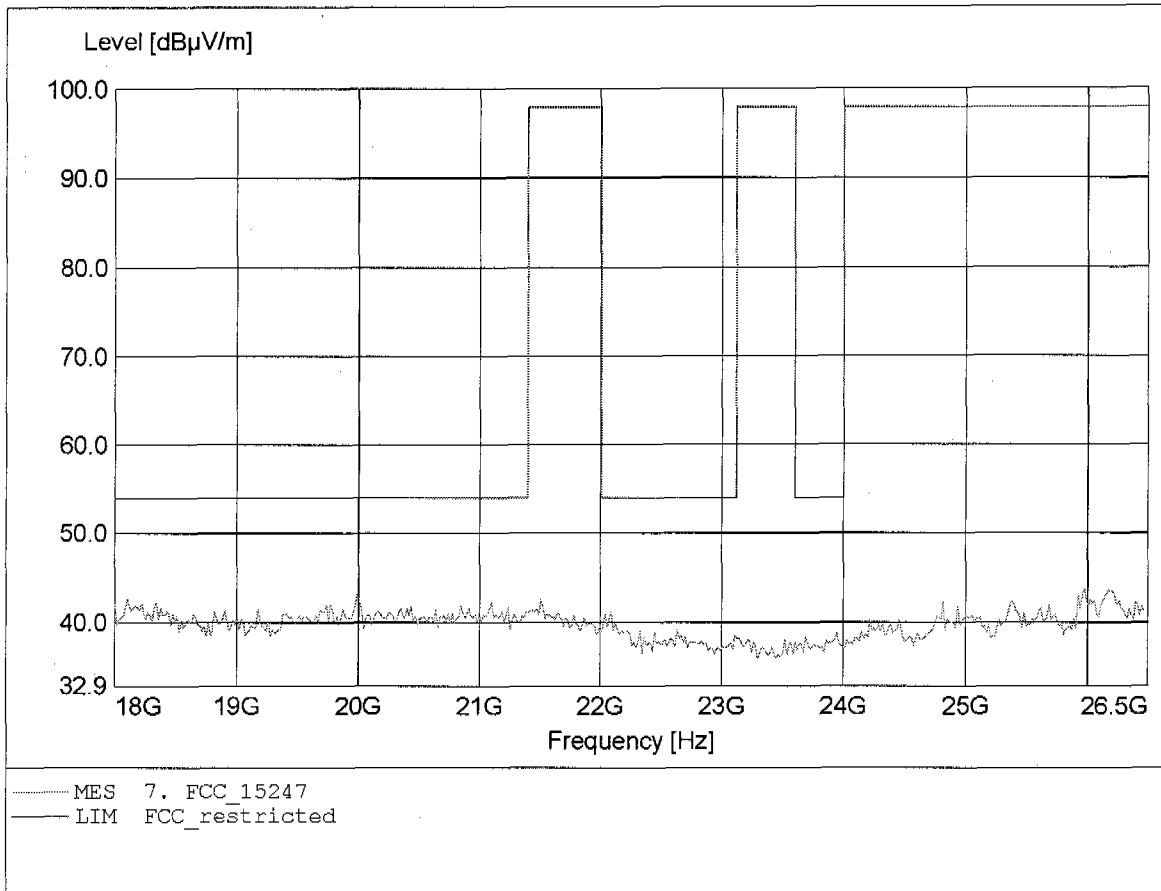

**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Cordless Headset / Remote Beltpack
Model: GN Ellipse / Ant.: 2 / Ch.: 94
Temperature/ Voltage: Temp.: 23°C, Unom.: 3.60 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.193GHz, Emax: 43.86dBµV/m, RBW: 1MHz

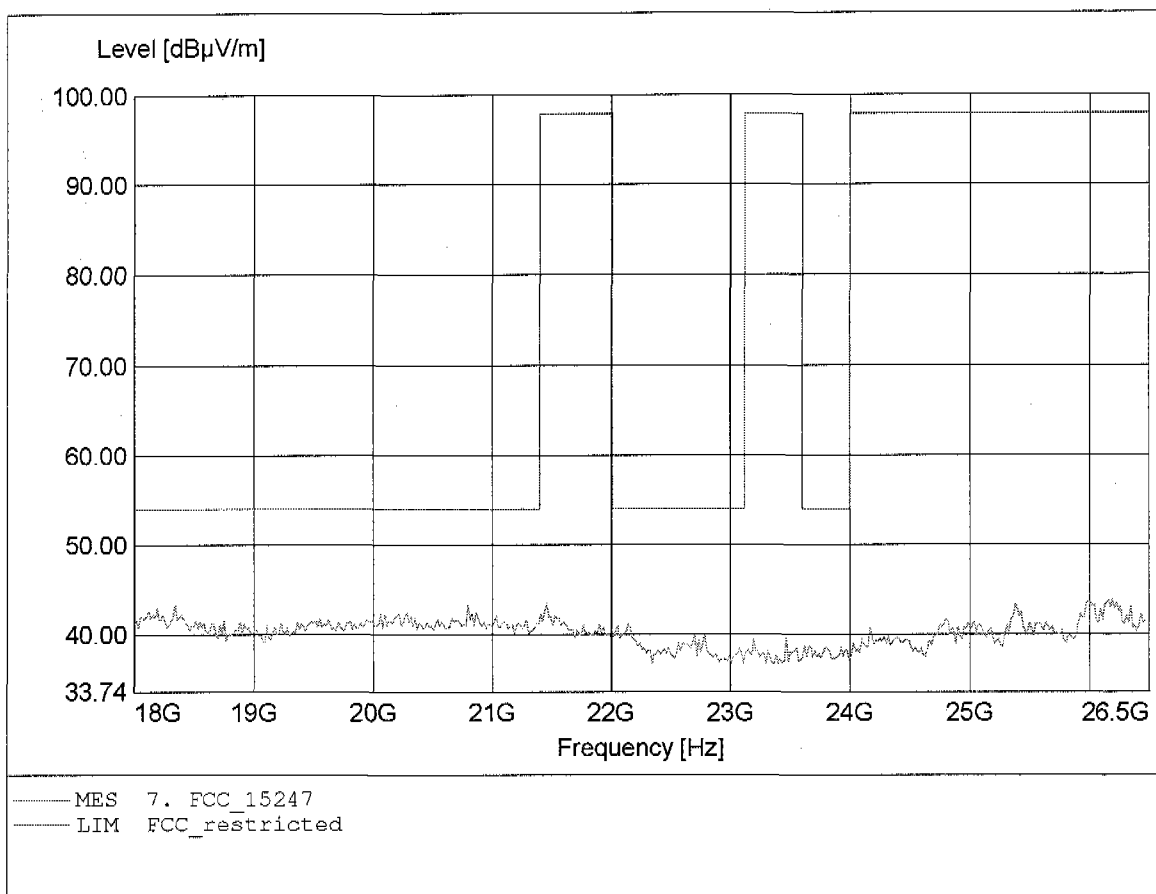



Appendix D

Spurious Emissions conducted - Transmitter operating



Appendix E

Carrier Frequency Separation



Ref Lvl
25 dBm

Delta 1 [T1]

-0.01 dB

868.53707415 kHz


RBW 100 kHz

VBW 100 kHz

SWT 5 ms

RF Att 40 dB

Unit dBm

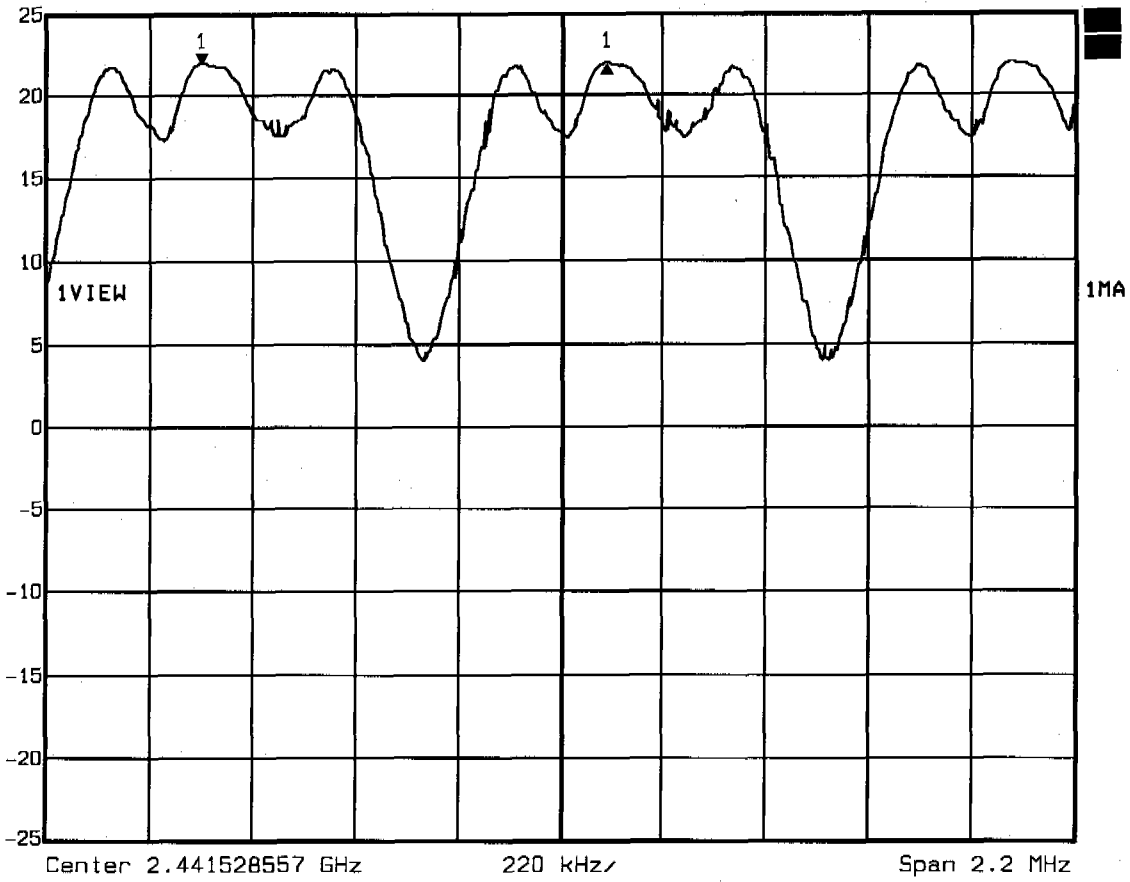

Title: Carrier Frequency Separation
Comment A: GN Netcom Cordless Headset 264 FCC Beltpack
Date: 22.MAR.2005 15:28:46



Appendix F

Number of Hopping Frequencies




Ref Lvl
25 dBm

Marker 1 [T1]

22.30 dBm
2.40537976 GHz

RBW 300 kHz
VBW 300 kHz
SWT 5 ms


RF Att 50 dB
Unit dBm

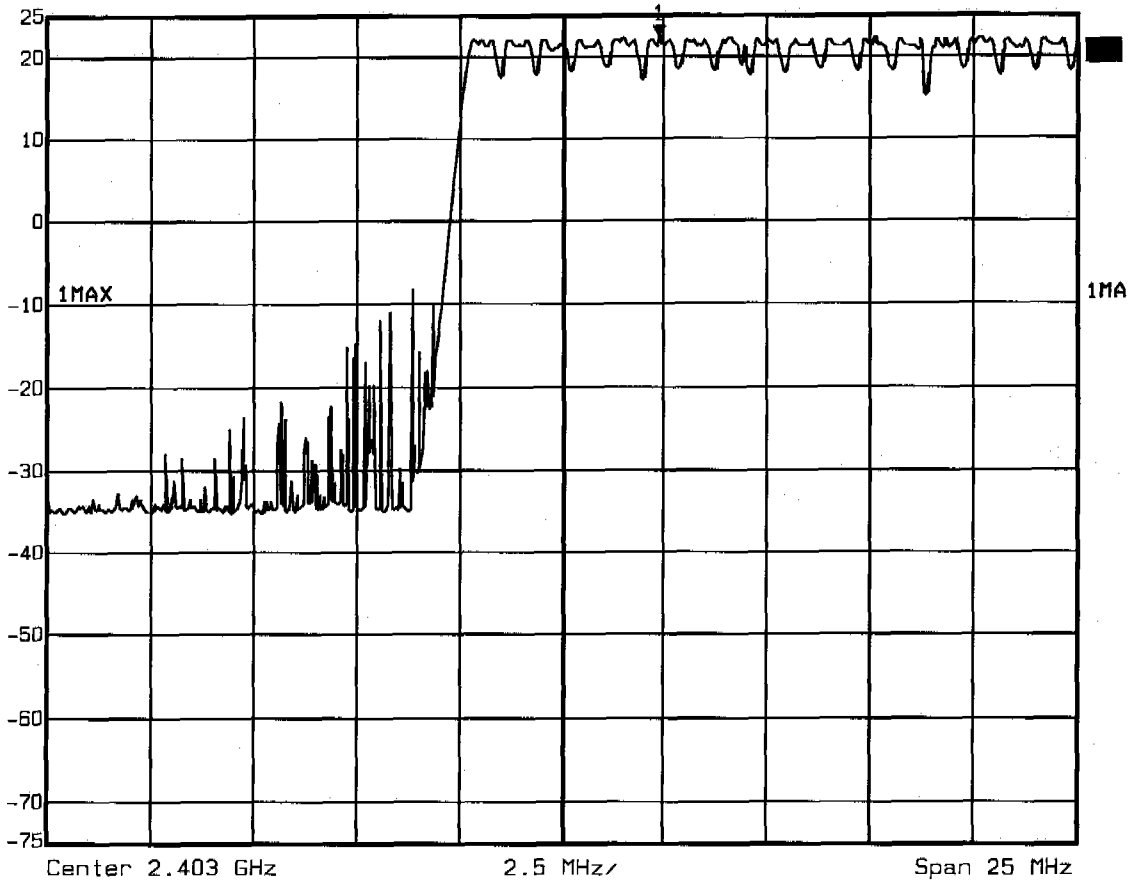

Title: Number of Hopping Frequencies Ch.: 0-17
Comment A: GN Netcom Cordless Headset 264 FCC Beltpack
Date: 22.MAR.2005 15:34:14




Marker 1 [T1] RBW 300 kHz RF Att 50 dB
Ref Lvl 25 dBm 23.17 dBm VBW 300 kHz
2.42617134 GHz SWT 5 ms Unit dBm

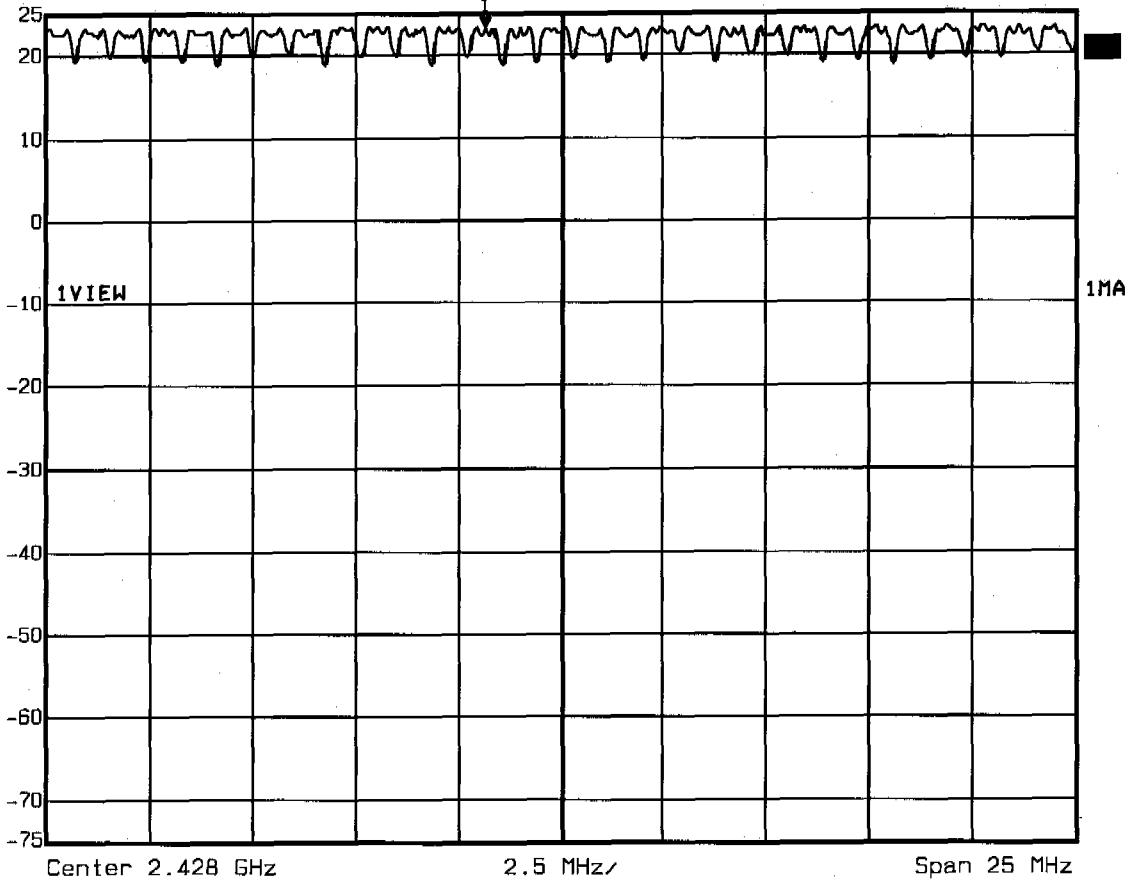

Title: Number of Hopping Frequencies Ch.: 17-46
Comment A: GN Netcom Cordless Headset 264 FCC Beltpack
Date: 23.MAR.2005 06:57:30




Marker 1 [T1] RBW 300 kHz RF Att 50 dB
Ref Lvl 23.02 dBm VBW 300 kHz
25 dBm 2.44515932 GHz SWT 5 ms Unit dBm

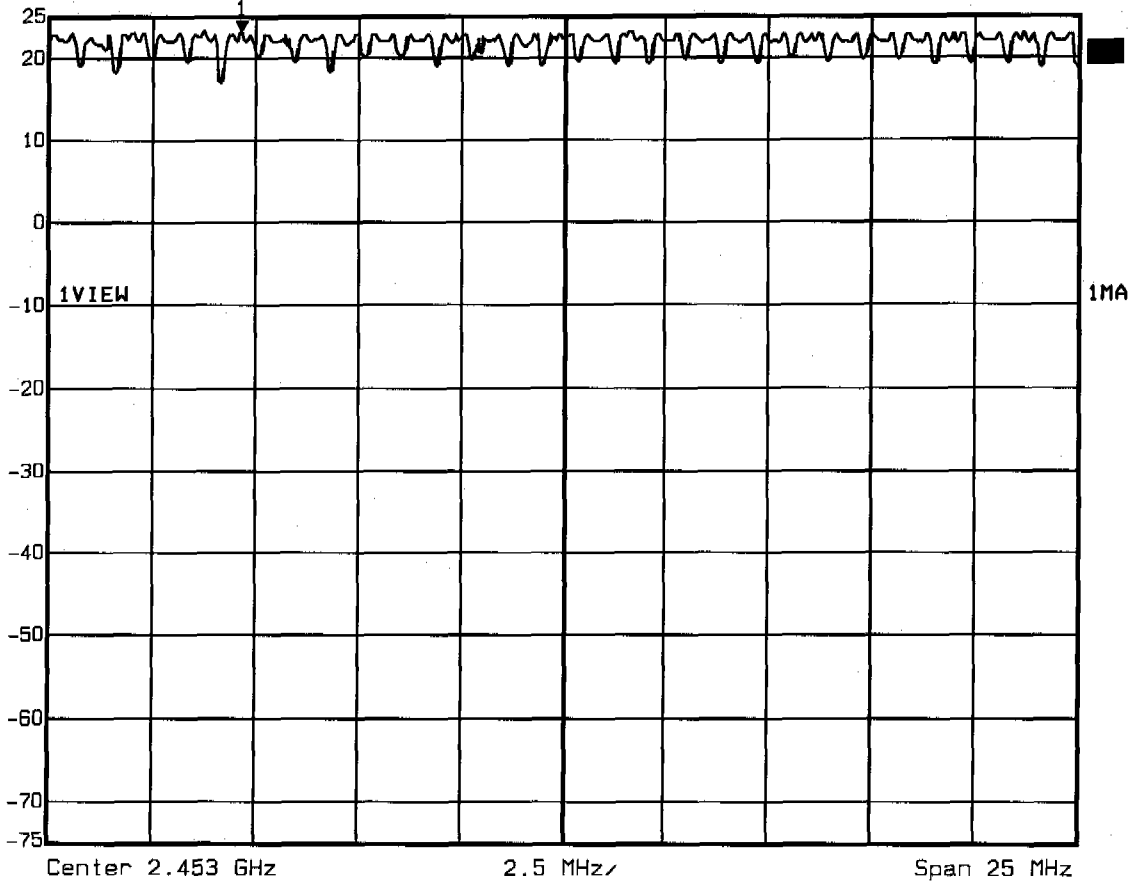

Title: Number of Hopping Frequencies Ch.: 47-75
Comment A: GN Netcom Cordless Headset 264 FCC Beltpack
Date: 23.MAR.2005 07:03:29




Marker 1 [T1] RBW 300 kHz RF Att 50 dB
Ref Lvl 25 dBm 22.68 dBm VBW 300 kHz
2.46840581 GHz SWT 5 ms Unit dBm

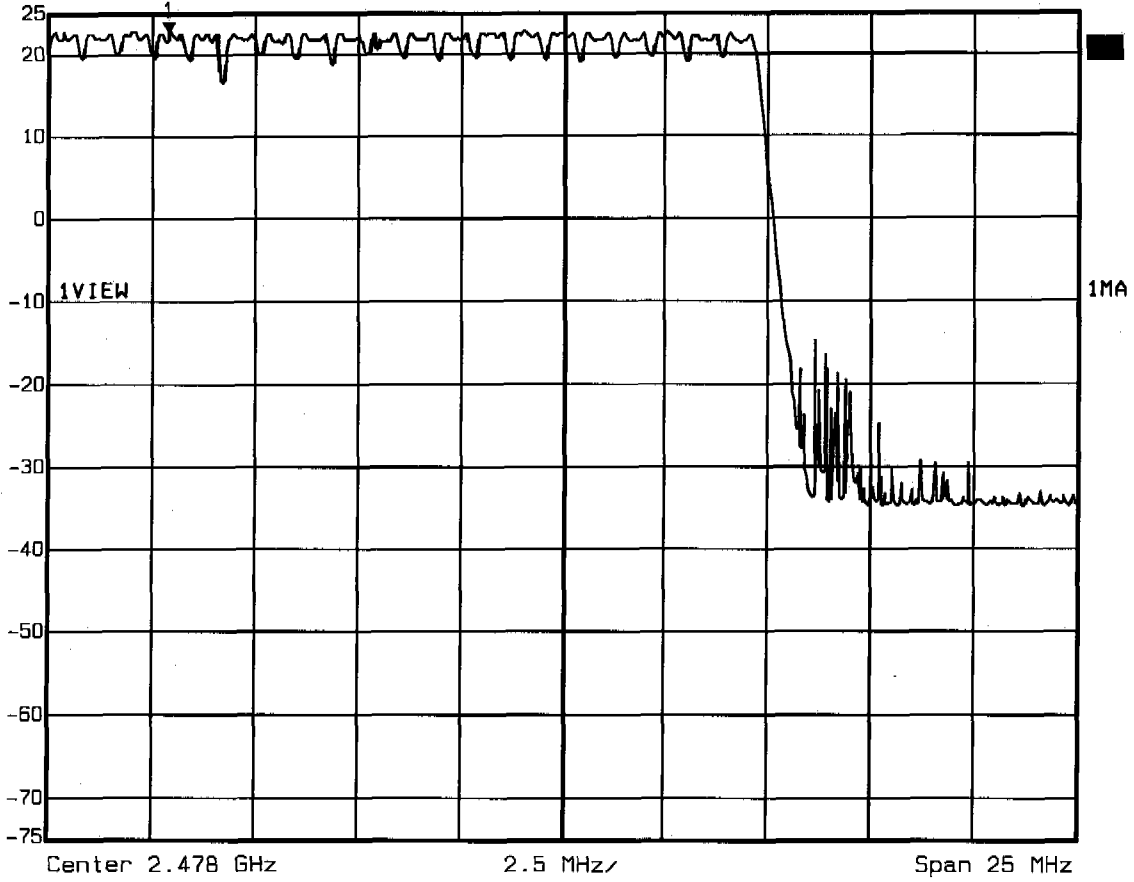

Title: Number of Hopping Frequencies Ch.: 76-94
Comment A: GN Netcom Cordless Headset 2G4 FCC Beltpack
Date: 23.MAR.2005 07:11:55



Delta 1 [T1] RBW 30 kHz RF Att 50 dB
Ref Lvl -52.35 dB VBW 30 kHz
132 dB μ V 1.49298597 MHz SWT 14 ms Unit dB μ V

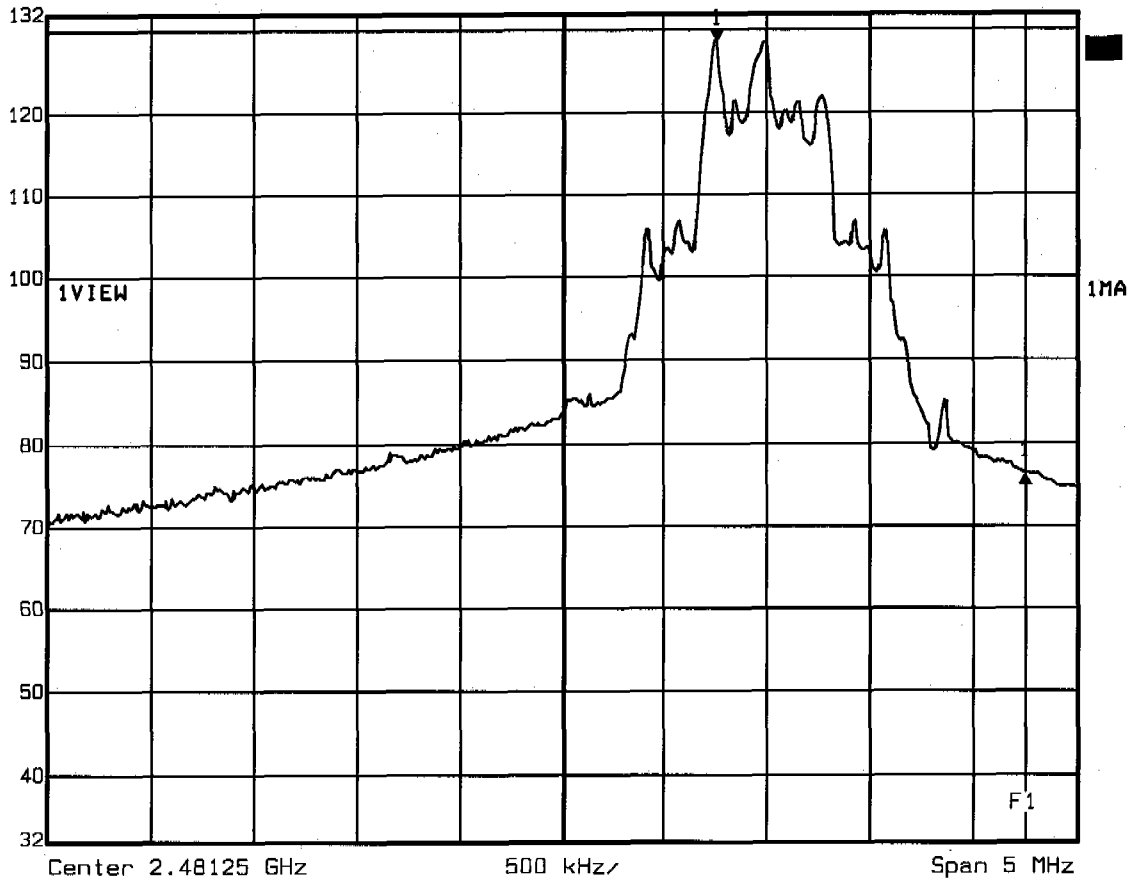

Title: Marker-Delta Method
Comment A: GN Netcom Cordless Headset 264 FCC Beltpack
Date: 22.MAR.2005 09:11:18




Appendix H

20dB Bandwidth




Delta 1 [T1] RBW 10 kHz RF Att 50 dB
Ref Lvl -0.49 dB VBW 10 kHz
25 dBm 626.05210421 kHz SWT 56 ms Unit dBm

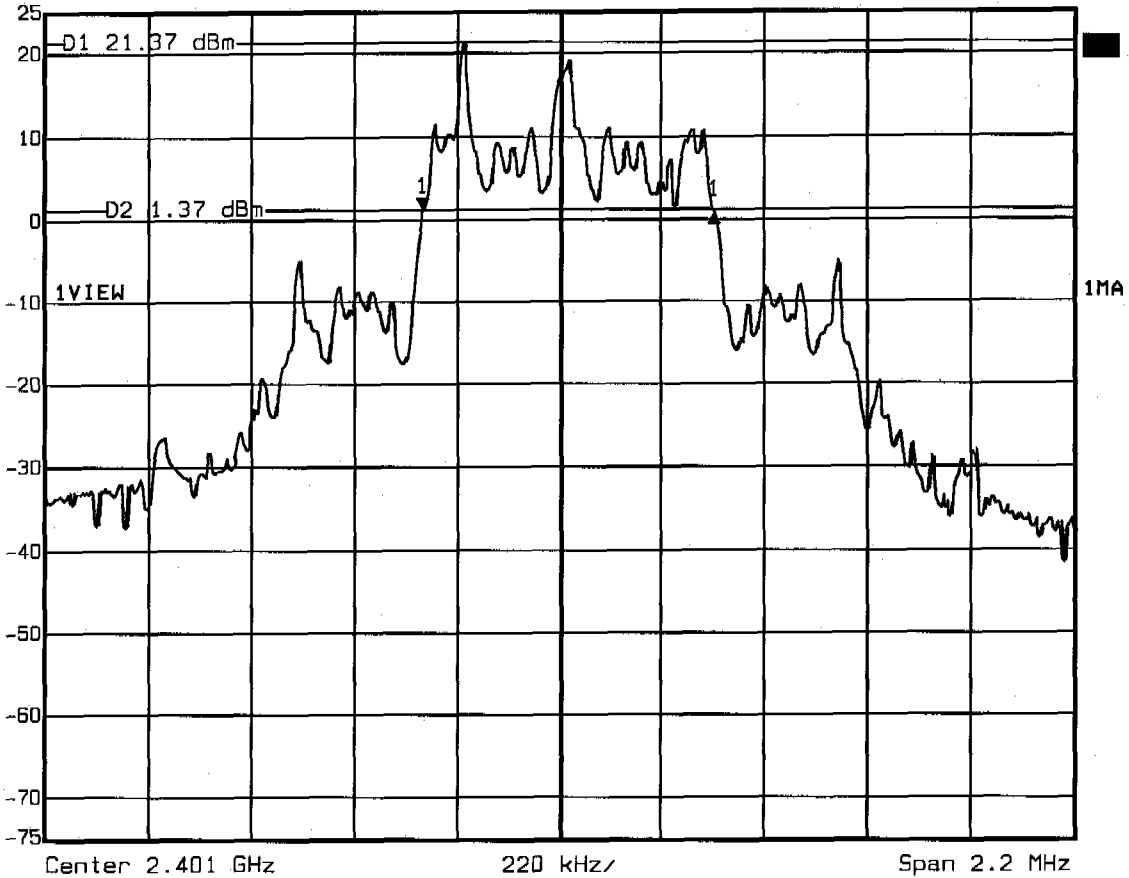

Title: -20 dB Bandwidth Ch.: 0
Comment A: GN Netcom Cordless Headset 264 FCC Beltpack
Date: 22.MAR.2005 09:47:42




Delta 1 [T1] RBW 10 kHz RF Att 50 dB
Ref Lvl 2.49 dB VBW 10 kHz
25 dBm 617.23446894 kHz SWT 56 ms Unit dBm

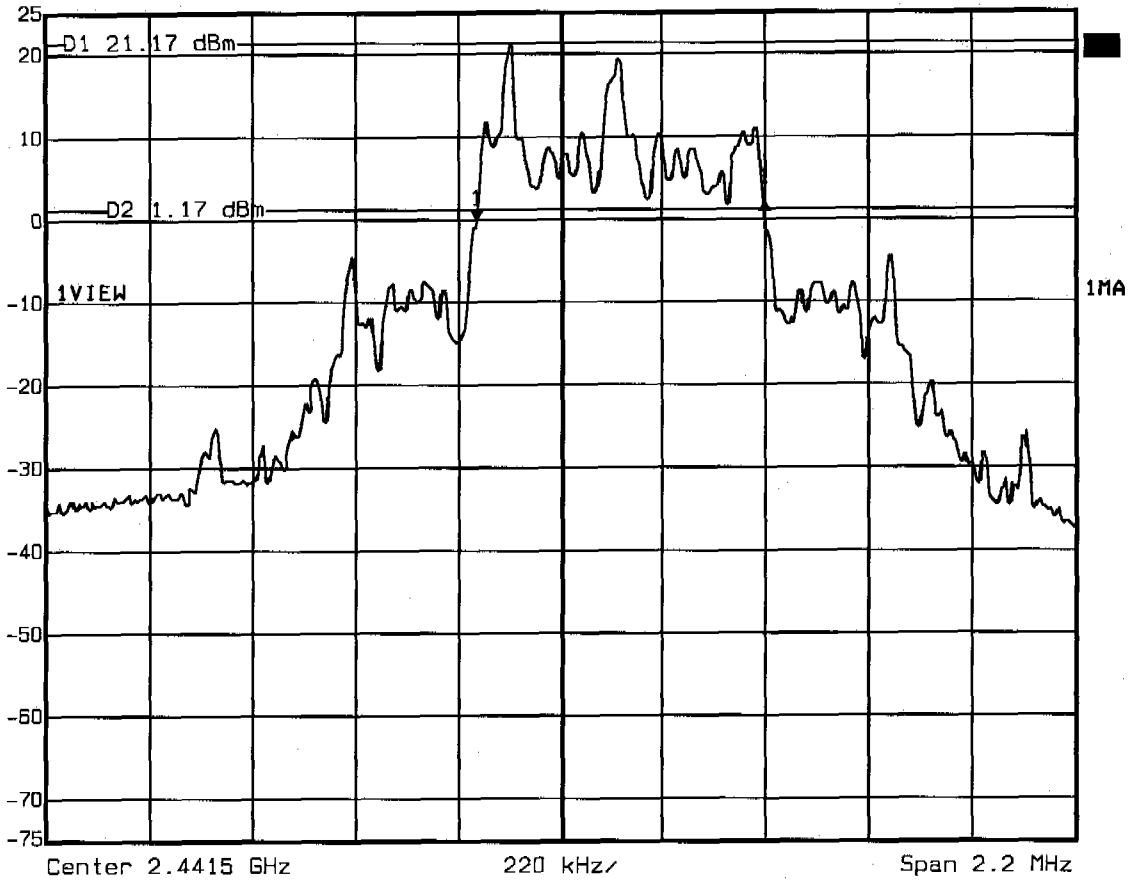

Title: -20 dB Bandwidth Ch.: 47
Comment A: GN Netcom Cordless Headset 264 FCC Beltpack
Date: 22.MAR.2005 09:53:10



Delta 1 [T1] RBW 10 kHz RF Att 50 dB
Ref Lvl 0.48 dB VBW 10 kHz
25 dBm 617.23446894 kHz SWT 56 ms Unit dBm

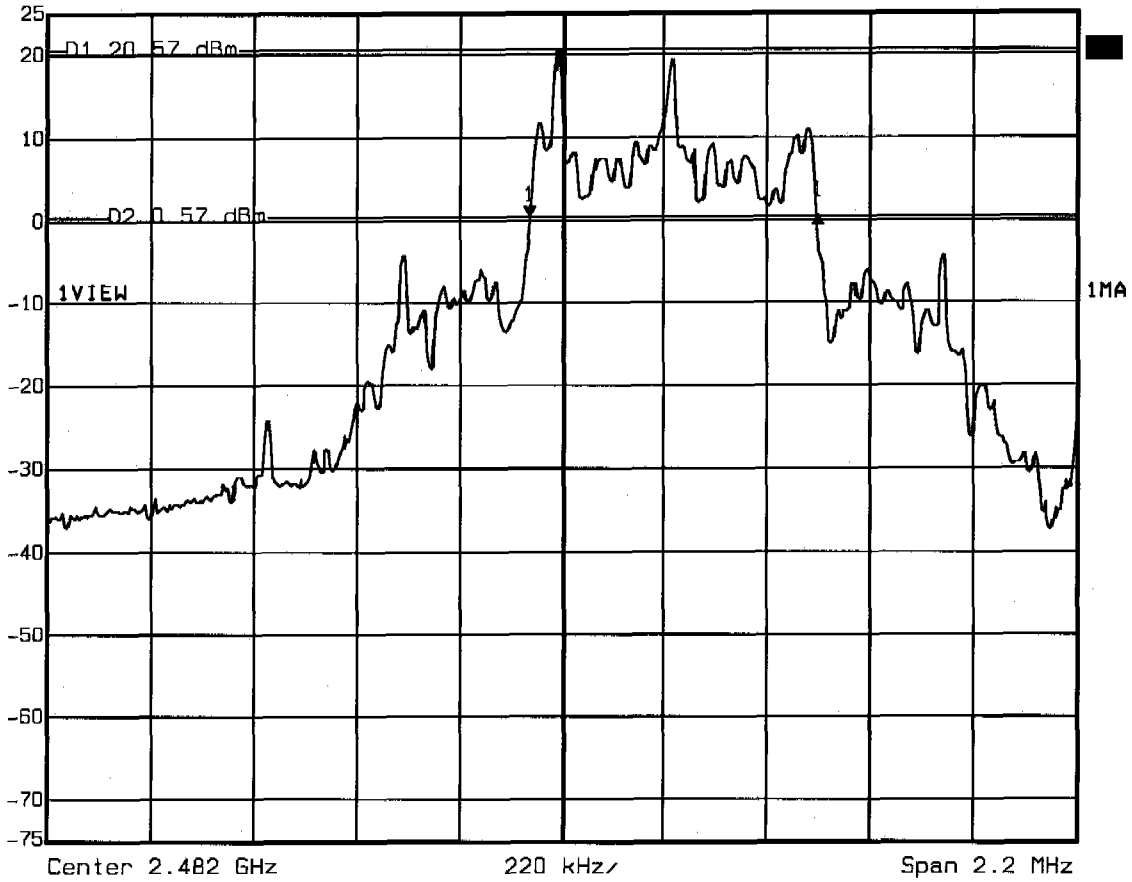

Title: -20 dB Bandwidth Ch.: 94
Comment A: GN Netcom Cordless Headset 264 FCC Beltpack
Date: 22.MAR.2005 09:58:14




Appendix G

Time of Occupancy (Dwell Time)




Delta 1 [T1] RBW 1 MHz RF Att 60 dB
Ref Lvl -0.07 dB VBW 1 MHz
30 dBm 841.683367 μ s SWT 2 ms Unit dBm

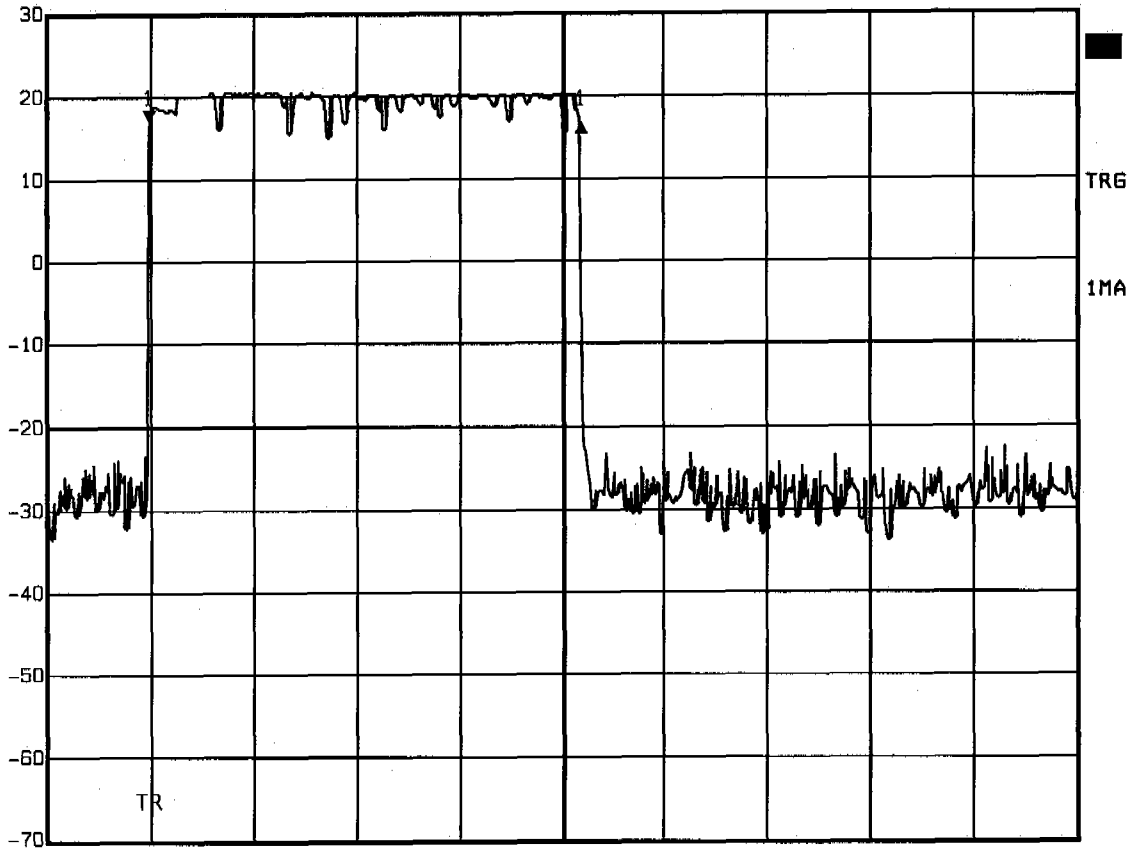

Title: Time of occupancy 40 events*0.841ms=33.64ms
Comment A: GN Netcom Cordless Headset 264 FCC Beltpack
Date: 23.MAR.2005 08:36:32



Delta 1 [T1] RBW 3 MHz RF Att 60 dB
 Ref Lvl -0.02 dB VBW 3 MHz
 30 dBm 815.631263 μ s SWT 11 ms Unit dBm

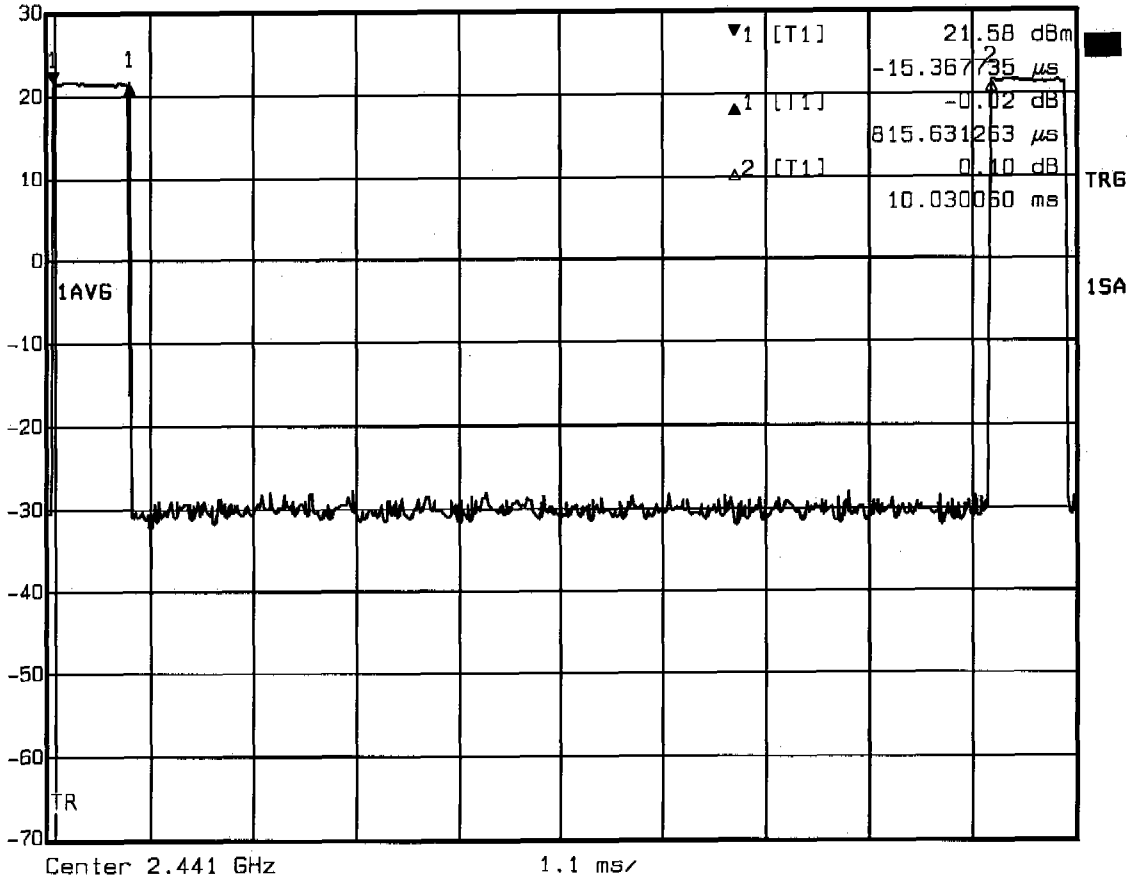

Title: Duty Cycle
 Comment A: GN Netcom Cordless Headset 264 FCC Beltpack
 Date: 23.MAR.2005 08:24:11




Appendix I

Band-edge Compliance of RF Emissions




Delta 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl -41.89 dB VBW 50 kHz
25 dBm -811.62324649 kHz SWT 5 ms Unit dBm

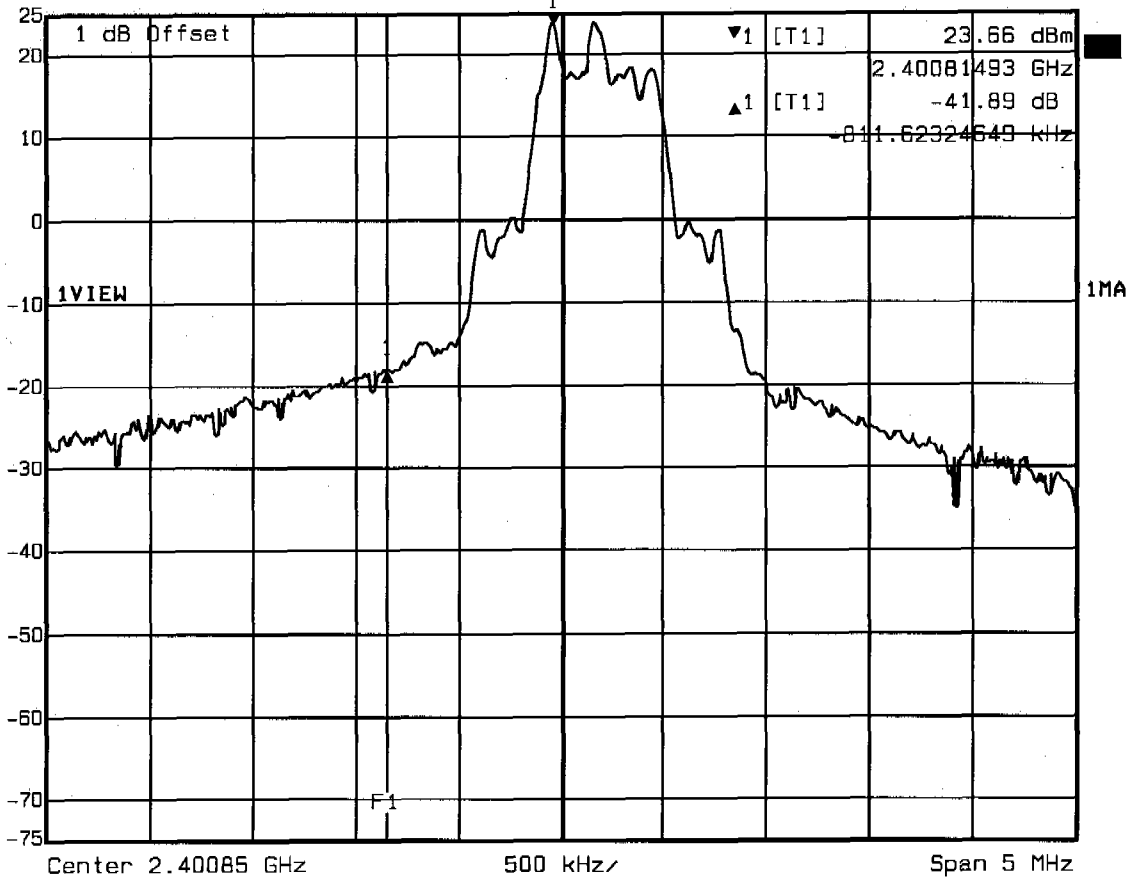

Title: Band-edge Compliance (conducted, single frequency)
Comment A: GN Netcom Cordless Headset 264 FCC Beltpack
Date: 22.MAR.2005 10:05:16




Delta 1 [T1] RBW 50 kHz RF Att 50 dB
 Ref Lvl -47.92 dB VBW 50 kHz
 25 dBm 1.25250501 MHz SWT 5 ms Unit dBm

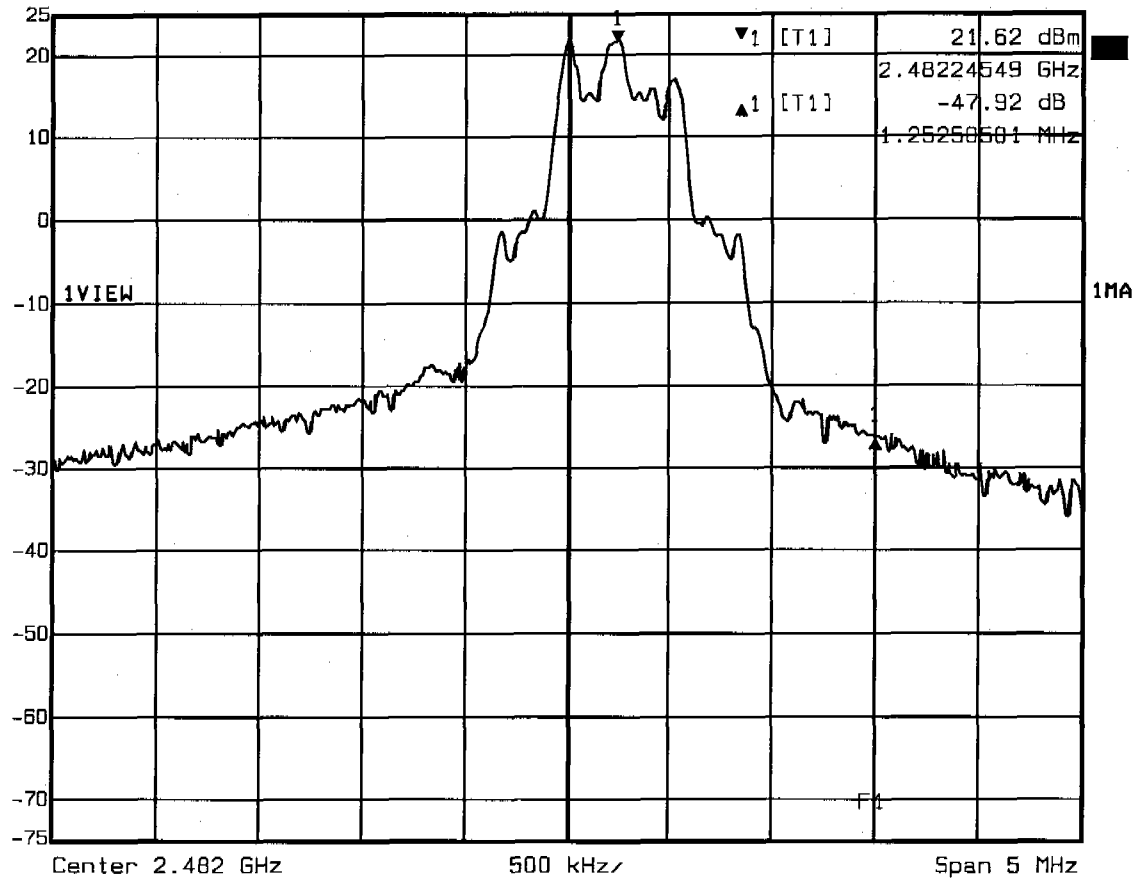

Title: Band-edge Compliance (conducted, single frequency)
 Comment A: GN Netcom Cordless Headset 264 FCC Beltpack
 Date: 22.MAR.2005 10:18:09




Delta 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl -41.58 dB VBW 50 kHz
25 dBm -1.03206413 MHz SWT 5 ms Unit dBm

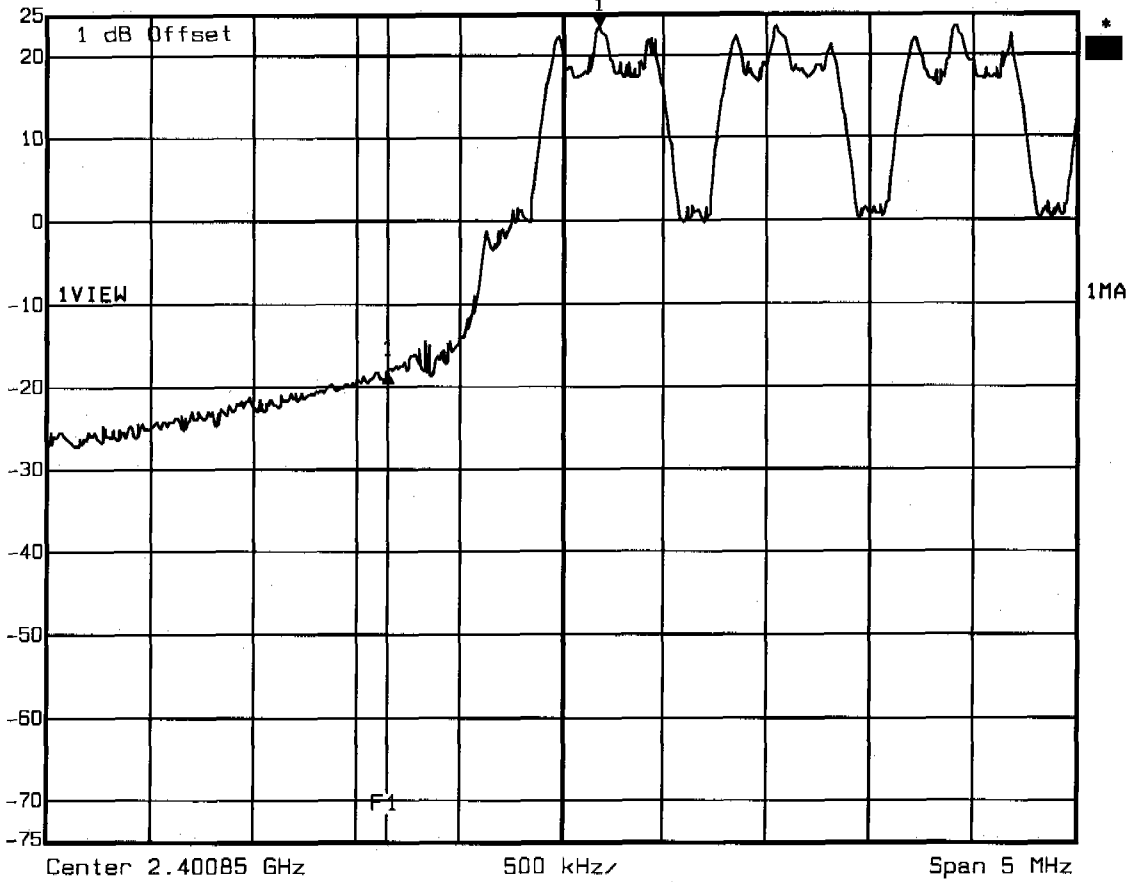

Title: Band-edge Compliance (conducted, hopping frequency)
Comment A: GN Netcom Cordless Headset 2G4 FCC Beltpack
Date: 22.MAR.2005 14:19:46



Delta 1 [T1] RBW 50 kHz RF Att 50 dB
 Ref Lvl -47.30 dB VBW 50 kHz
 25 dBm 971.94388777 kHz SWT 5 ms Unit dBm

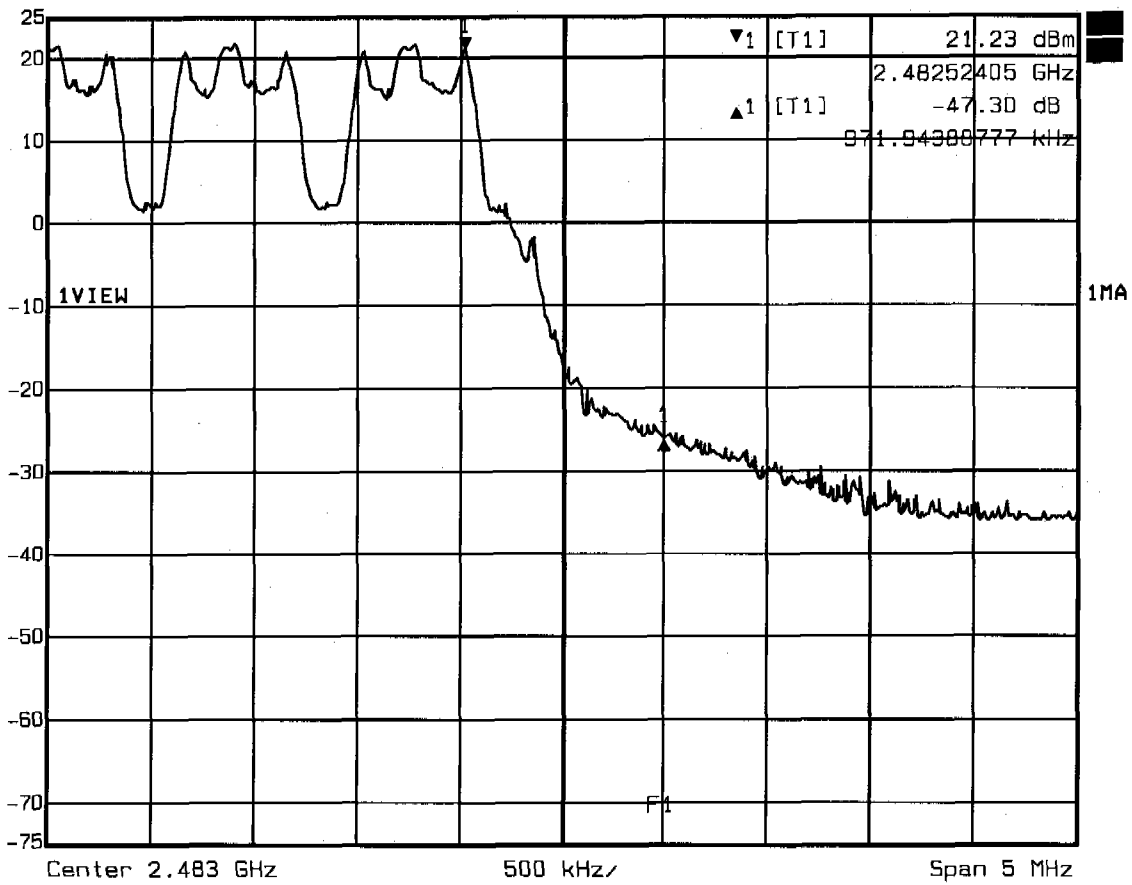

Title: Band-edge Compliance (conducted, hopping frequency)
 Comment A: GN Netcom Cordless Headset 264 FCC Beltpack
 Date: 22.MAR.2005 15:09:37



Appendix J

Conducted Measurement at (AC) Power Line