



**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: GN NETCOM A/S
EUT: BLUETOOTH HEADSET / Frequency: 2441 MHz
Model: MOTOROLA H15
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Schlaps
Test Conditions: 23°C / Unom.: 3.70 V DC (BATTERY)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 30.000MHz, Emax: 39.87dBµV/m, RBW: 100kHz

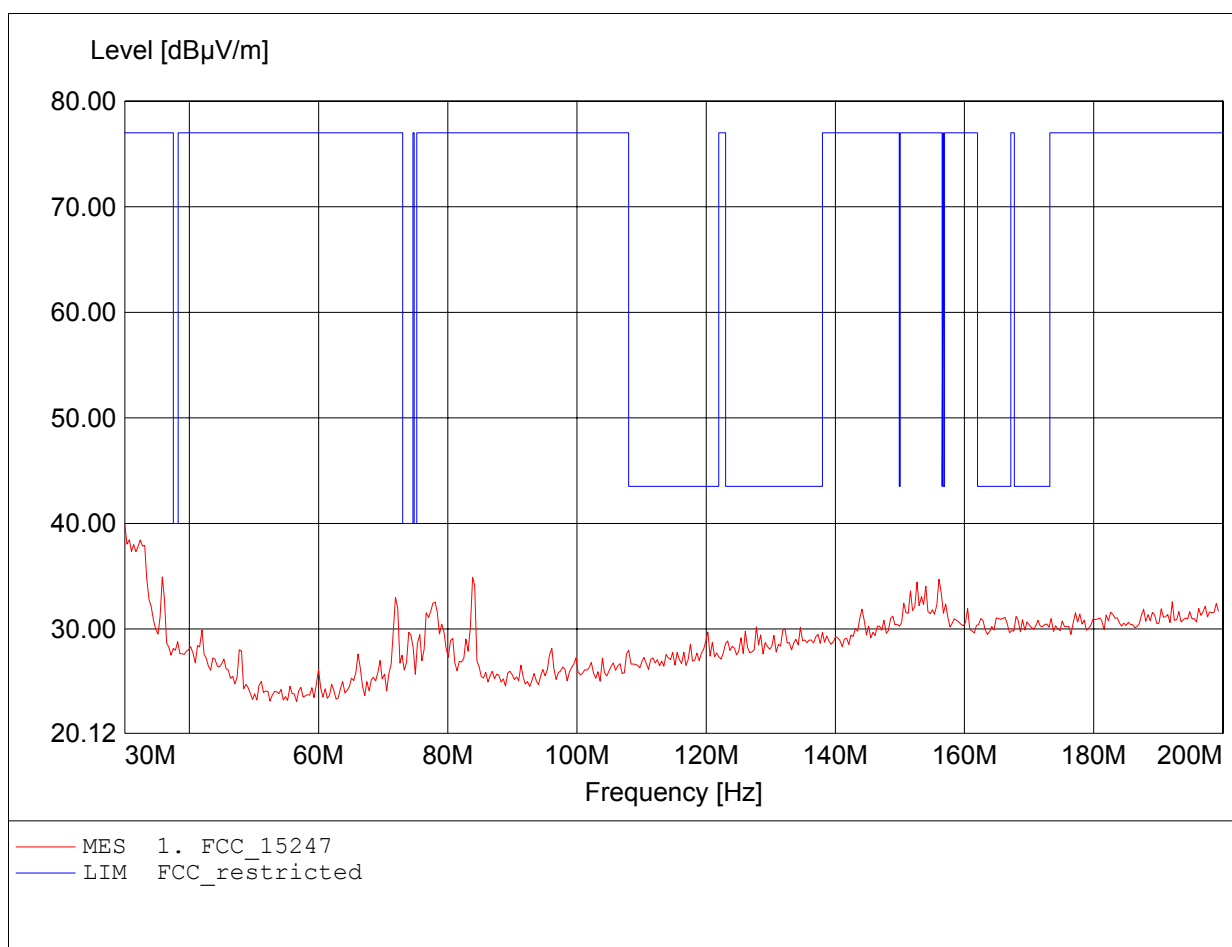


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: GN NETCOM A/S
EUT: BLUETOOTH HEADSET / Frequency: 2441 MHz
Model: MOTOROLA H15
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Schlaps
Test Conditions: 23°C / Unom.: 3.70 V DC (BATTERY)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 197.275MHz, Emax: 32.60dBµV/m, RBW: 100kHz

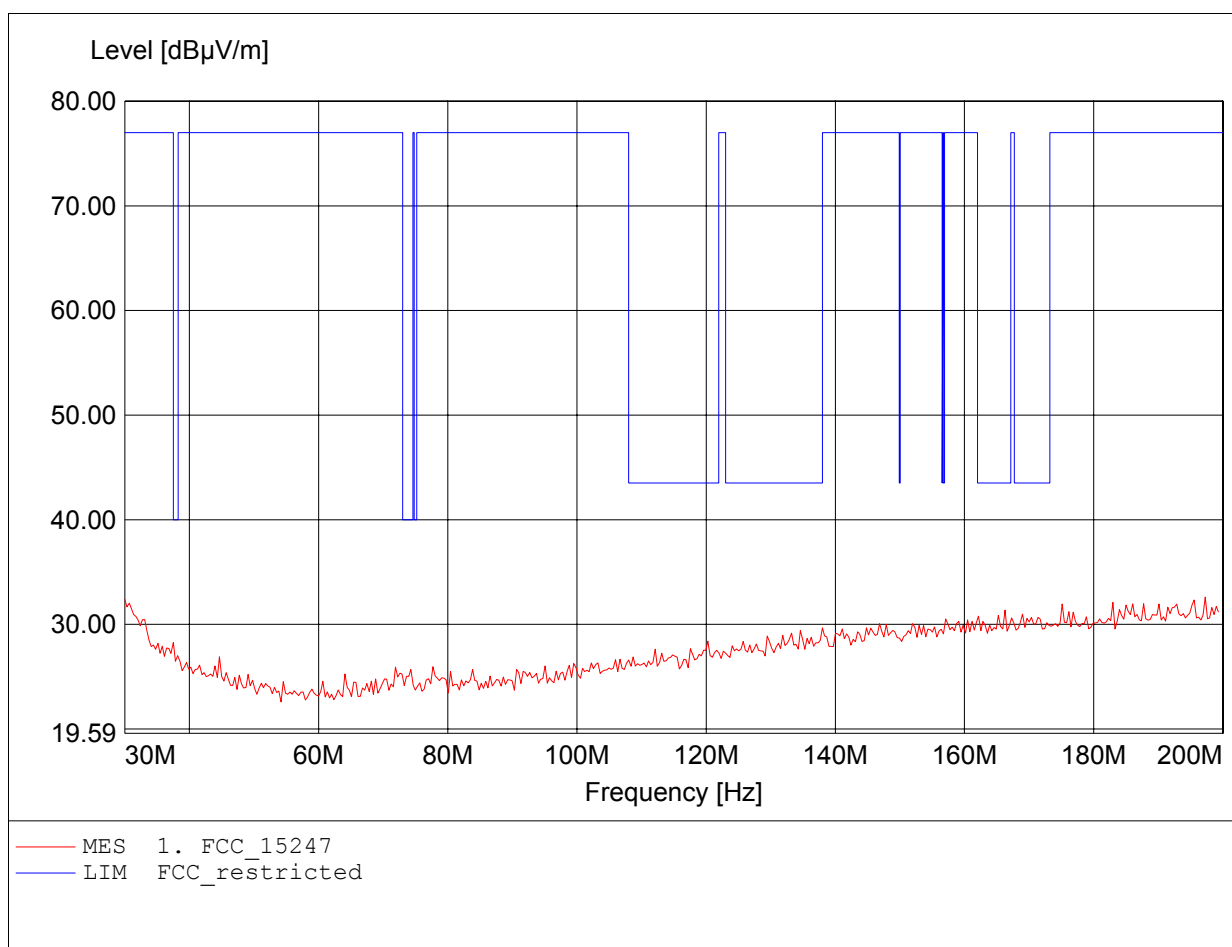


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: GN NETCOM A/S
EUT: BLUETOOTH HEADSET / Frequency: 2441 MHz
Model: MOTOROLA H15
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Schlaps
Test Conditions: 23°C / Unom.: 3.70 V DC (BATTERY)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 842.886MHz, Emax: 37.57dBµV/m, RBW: 100kHz

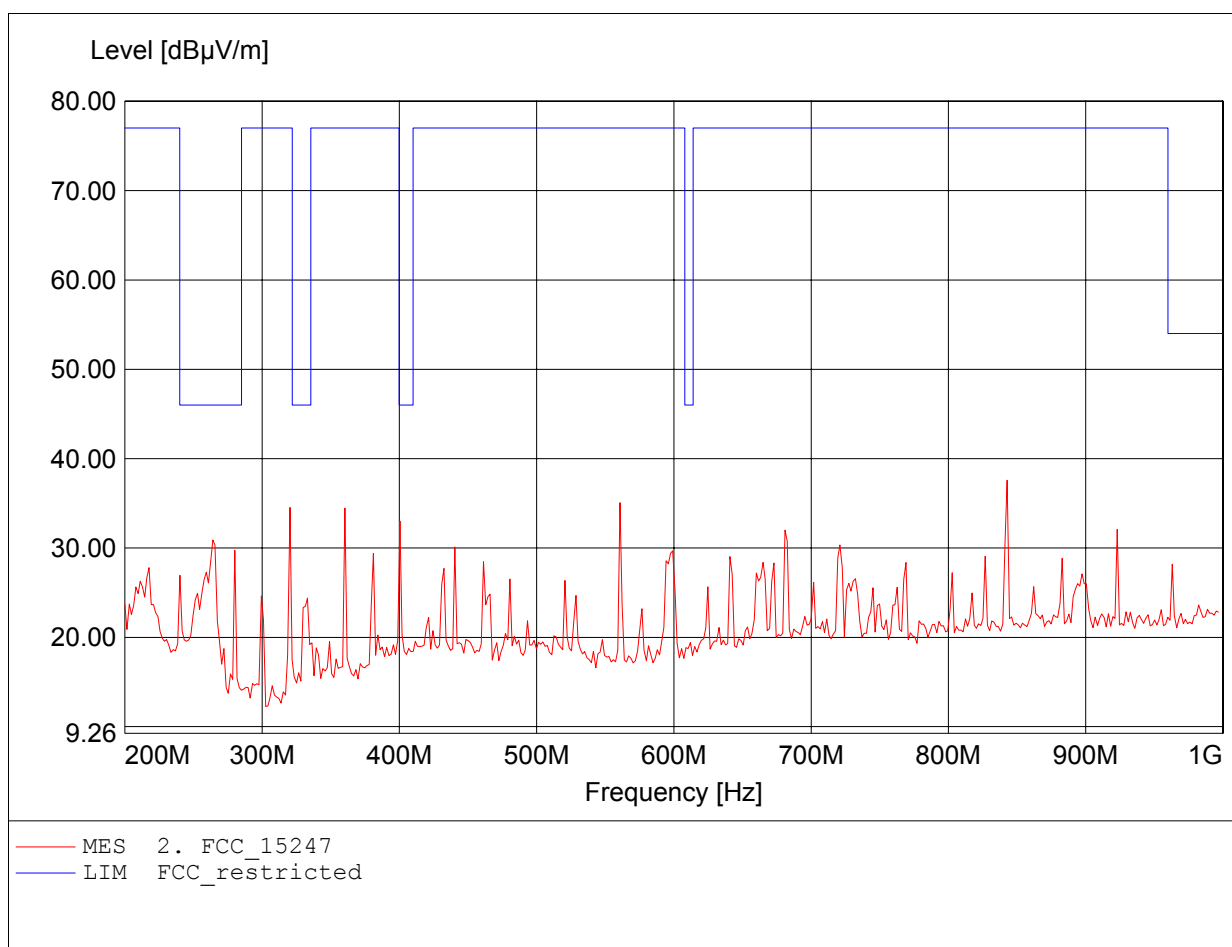


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: GN NETCOM A/S
EUT: BLUETOOTH HEADSET / Frequency: 2441 MHz
Model: MOTOROLA H15
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Schlaps
Test Conditions: 23°C / Unom.: 3.70 V DC (BATTERY)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 265.731MHz, Emax: 32.73dBµV/m, RBW: 100kHz

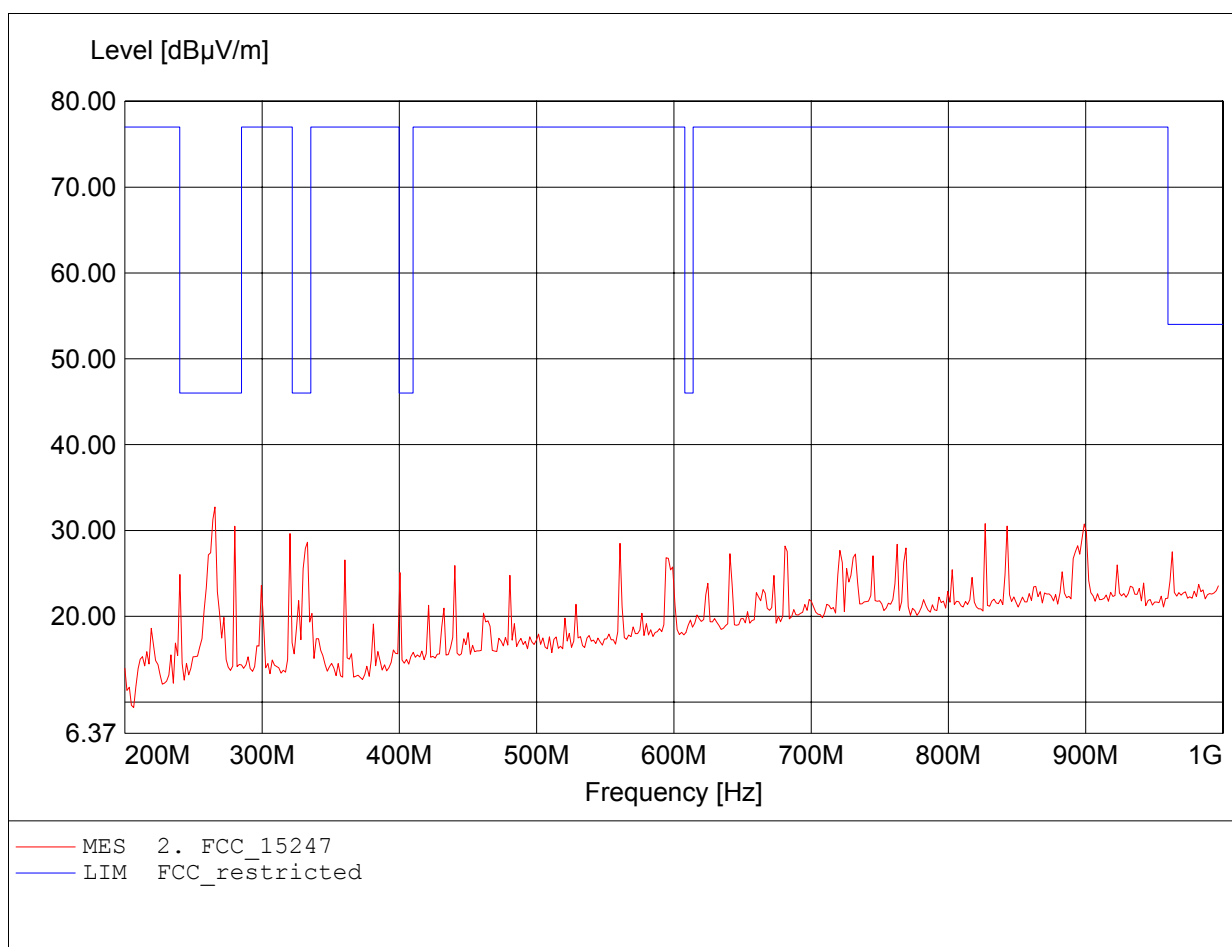


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: GN NETCOM A/S
EUT: BLUETOOTH HEADSET / Frequency: 2441 MHz
Model: MOTOROLA H15
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Schlaps
Test Conditions: 23°C / Unom.: 3.70 V DC (BATTERY)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.976GHz, Emax: 50.74dBµV/m, RBW: 1MHz

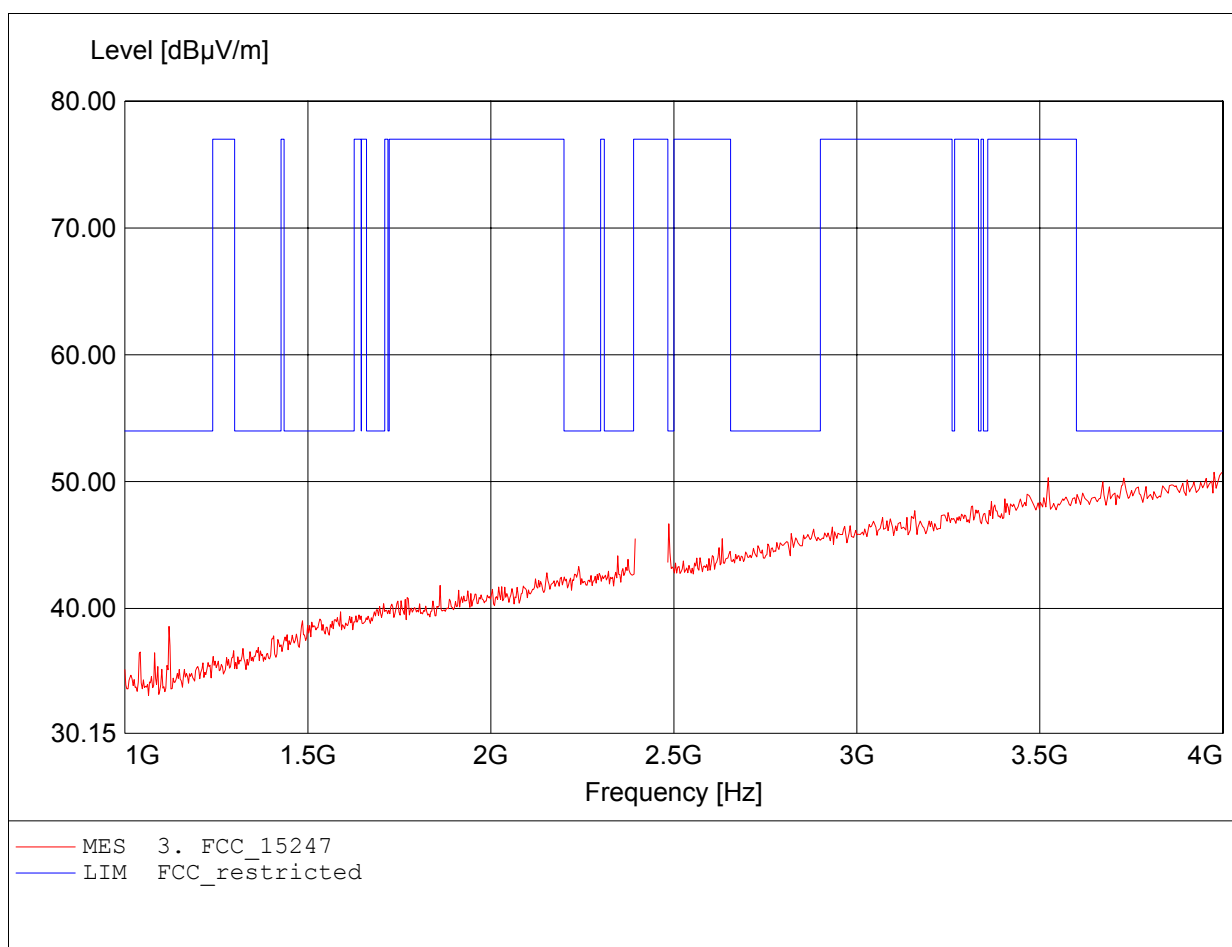


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: GN NETCOM A/S
EUT: BLUETOOTH HEADSET / Frequency: 2441 MHz
Model: MOTOROLA H15
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Schlaps
Test Conditions: 23°C / Unom.: 3.70 V DC (BATTERY)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.982GHz, Emax: 50.92dBµV/m, RBW: 1MHz

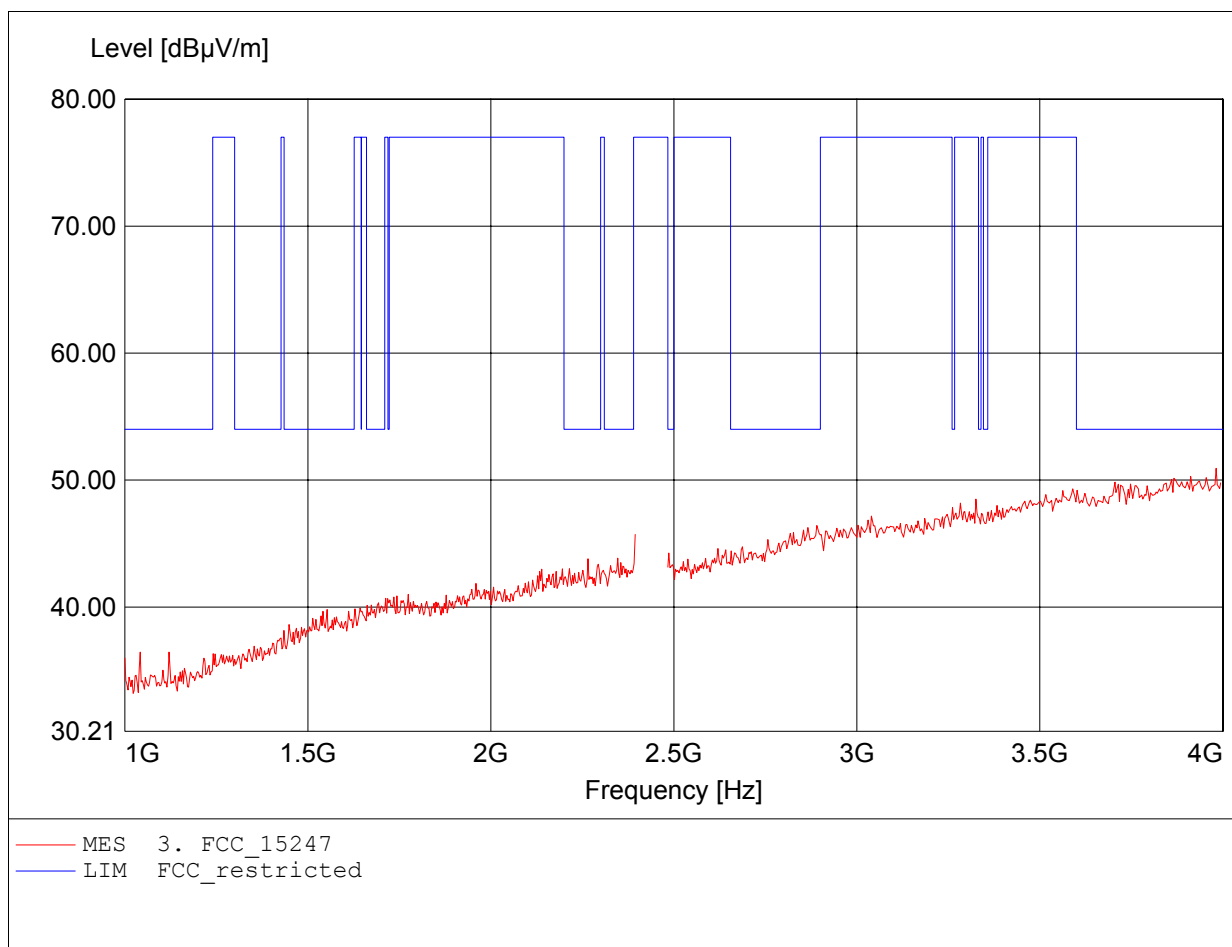


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: GN NETCOM A/S
EUT: BLUETOOTH HEADSET / Frequency: 2441 MHz
Model: MOTOROLA H15
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Schlaps
Test Conditions: 23°C / Unom.: 3.70 V DC (BATTERY)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.607GHz, Emax: 43.01dBµV/m, RBW: 1MHz

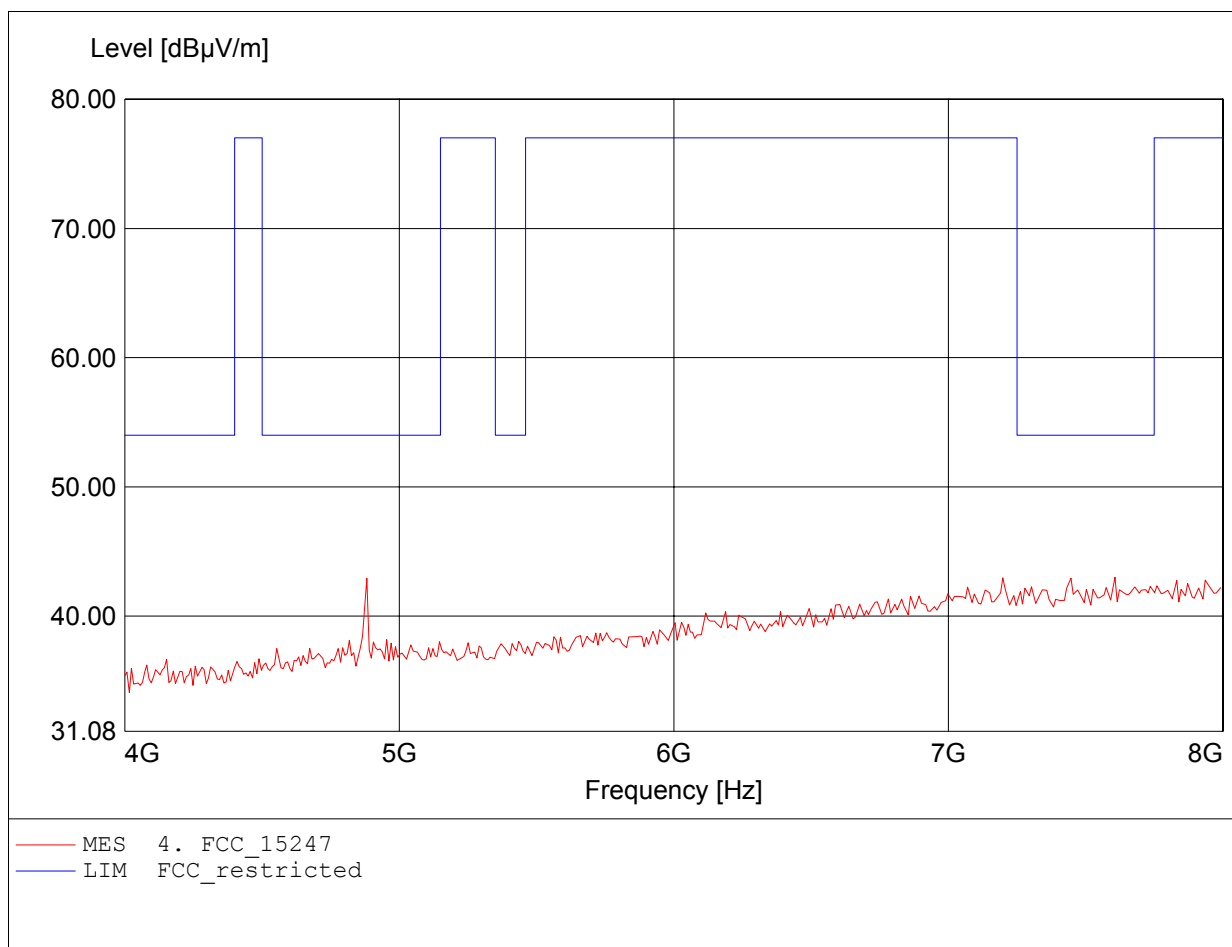


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: GN NETCOM A/S
EUT: BLUETOOTH HEADSET / Frequency: 2441 MHz
Model: MOTOROLA H15
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Schlaps
Test Conditions: 23°C / Unom.: 3.70 V DC (BATTERY)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.535GHz, Emax: 43.24dBµV/m, RBW: 1MHz

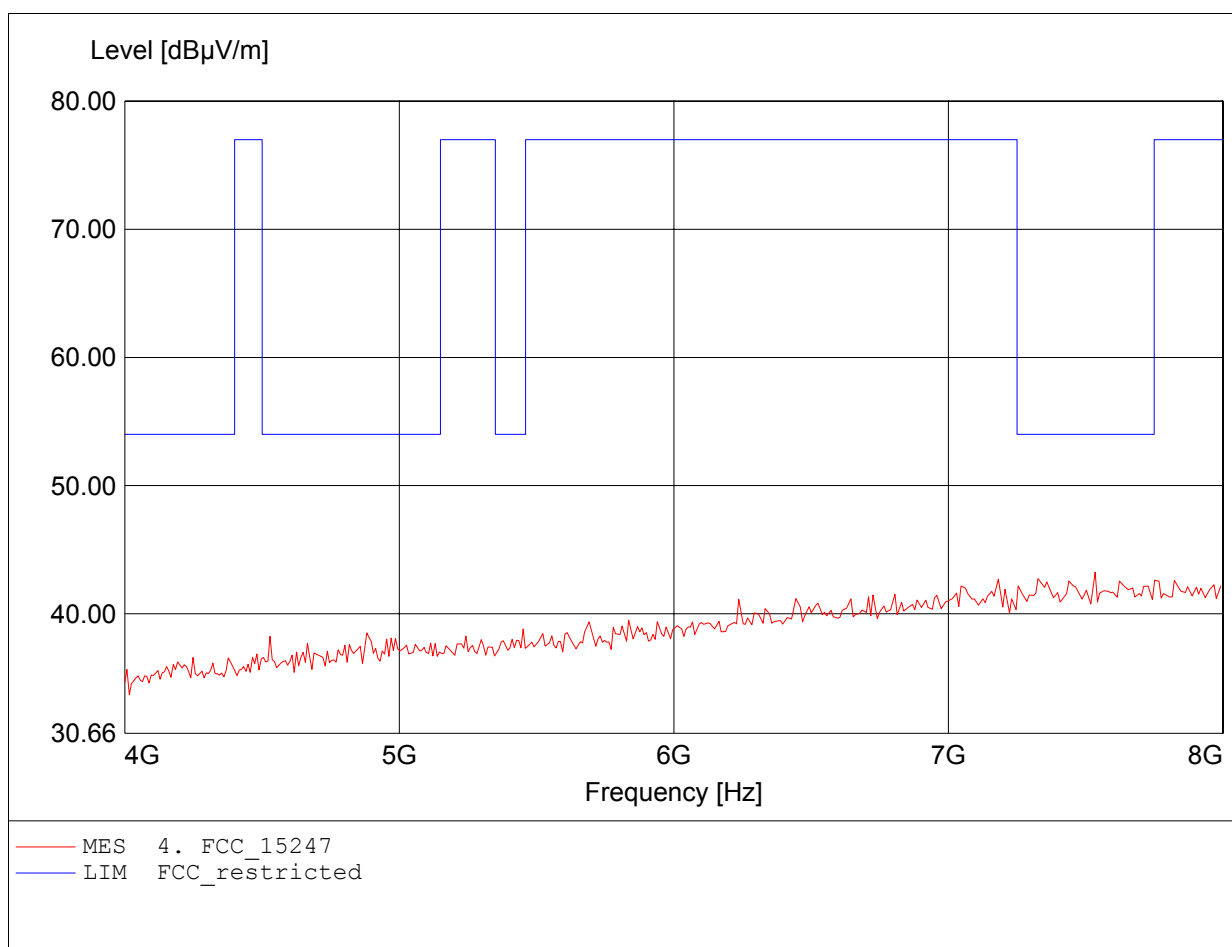


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: GN NETCOM A/S
EUT: BLUETOOTH HEADSET / Frequency: 2441 MHz
Model: MOTOROLA H15
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Schlaps
Test Conditions: 23°C / Unom.: 3.70 V DC (BATTERY)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.864GHz, Emax: 47.75dBµV/m, RBW: 1MHz

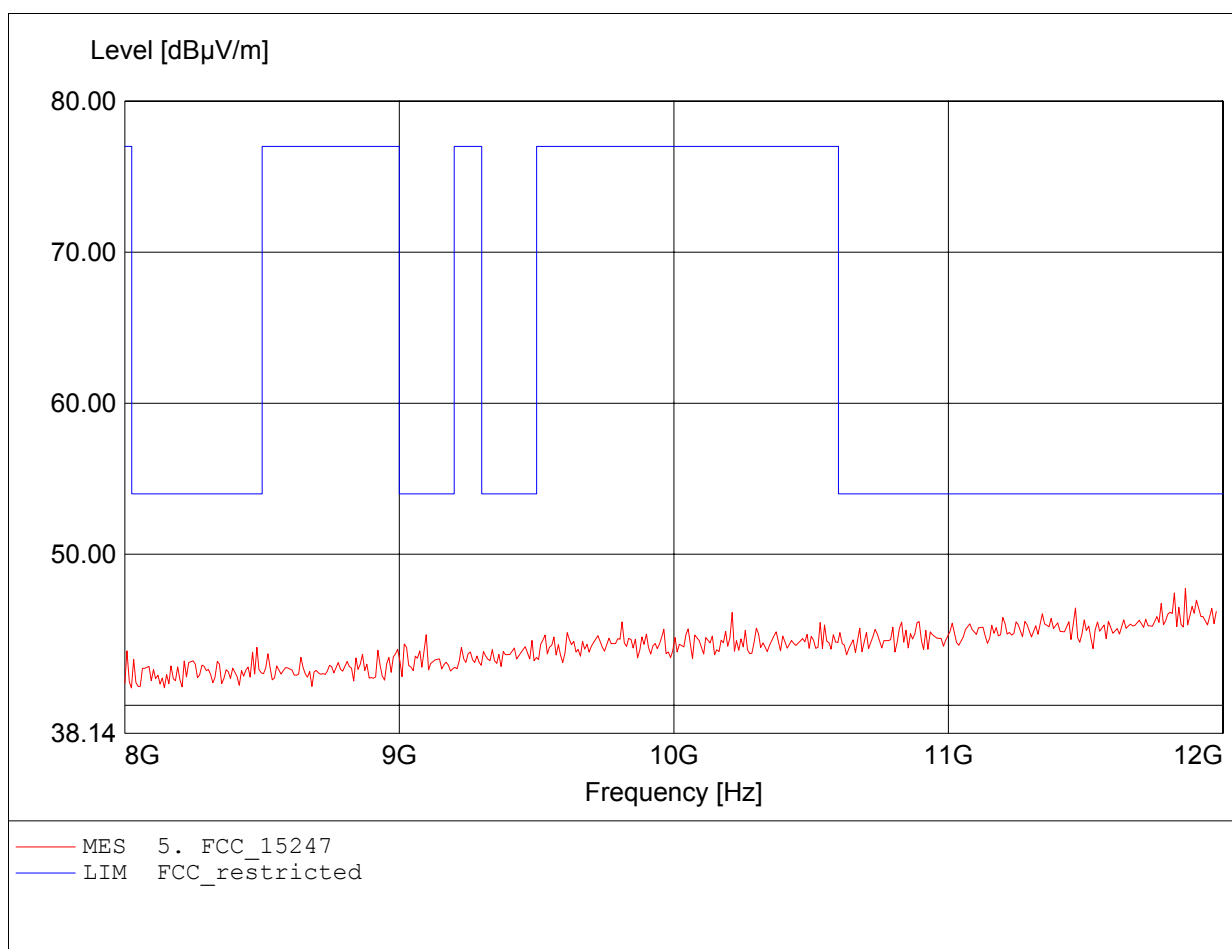


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: GN NETCOM A/S
EUT: BLUETOOTH HEADSET / Frequency: 2441 MHz
Model: MOTOROLA H15
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Schlaps
Test Conditions: 23°C / Unom.: 3.70 V DC (BATTERY)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.960GHz, Emax: 47.06dBµV/m, RBW: 1MHz

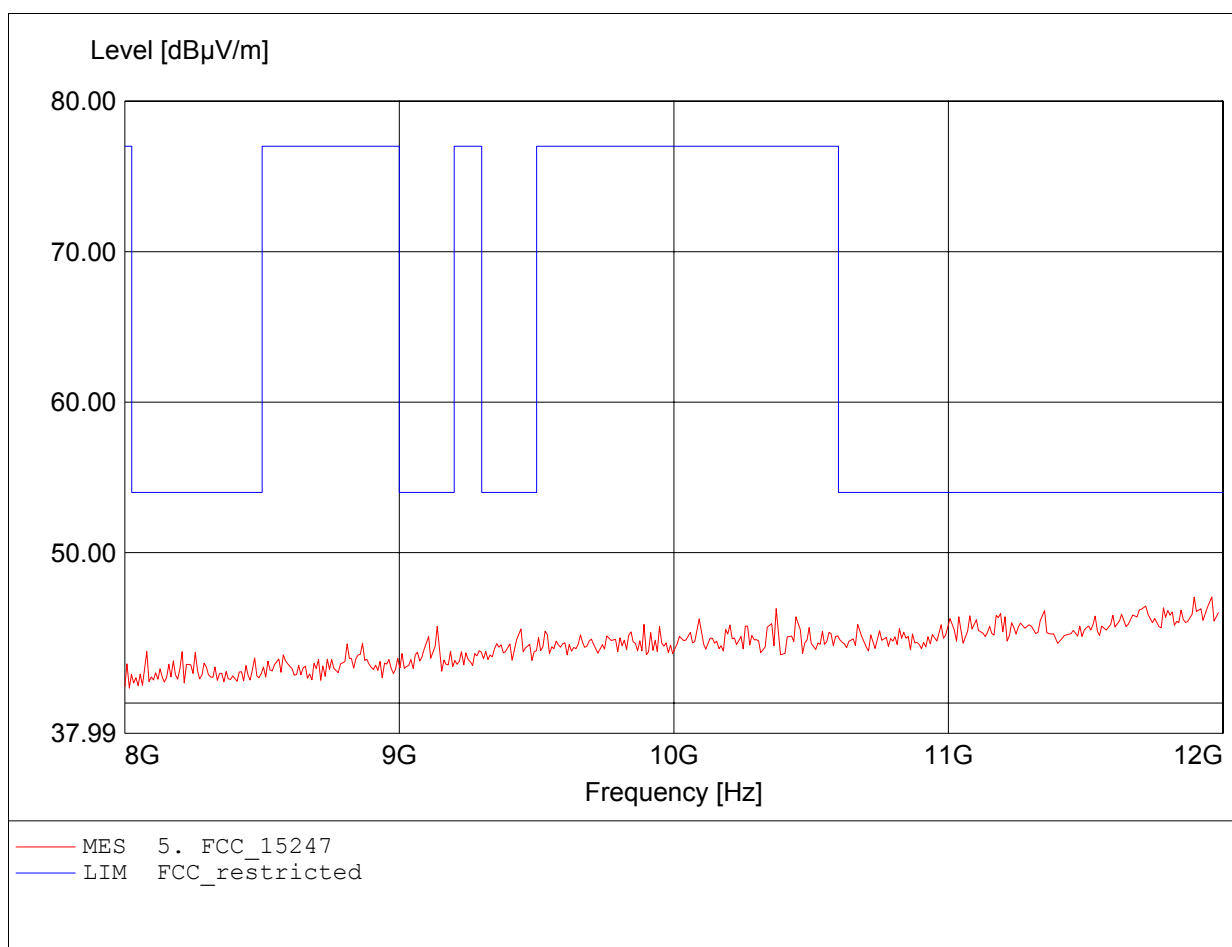


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: GN NETCOM A/S
EUT: BLUETOOTH HEADSET / Frequency: 2441 MHz
Model: MOTOROLA H15
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Schlaps
Test Conditions: 23°C / Unom.: 3.70 V DC (BATTERY)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 17.747GHz, Emax: 48.50dBµV/m, RBW: 1MHz

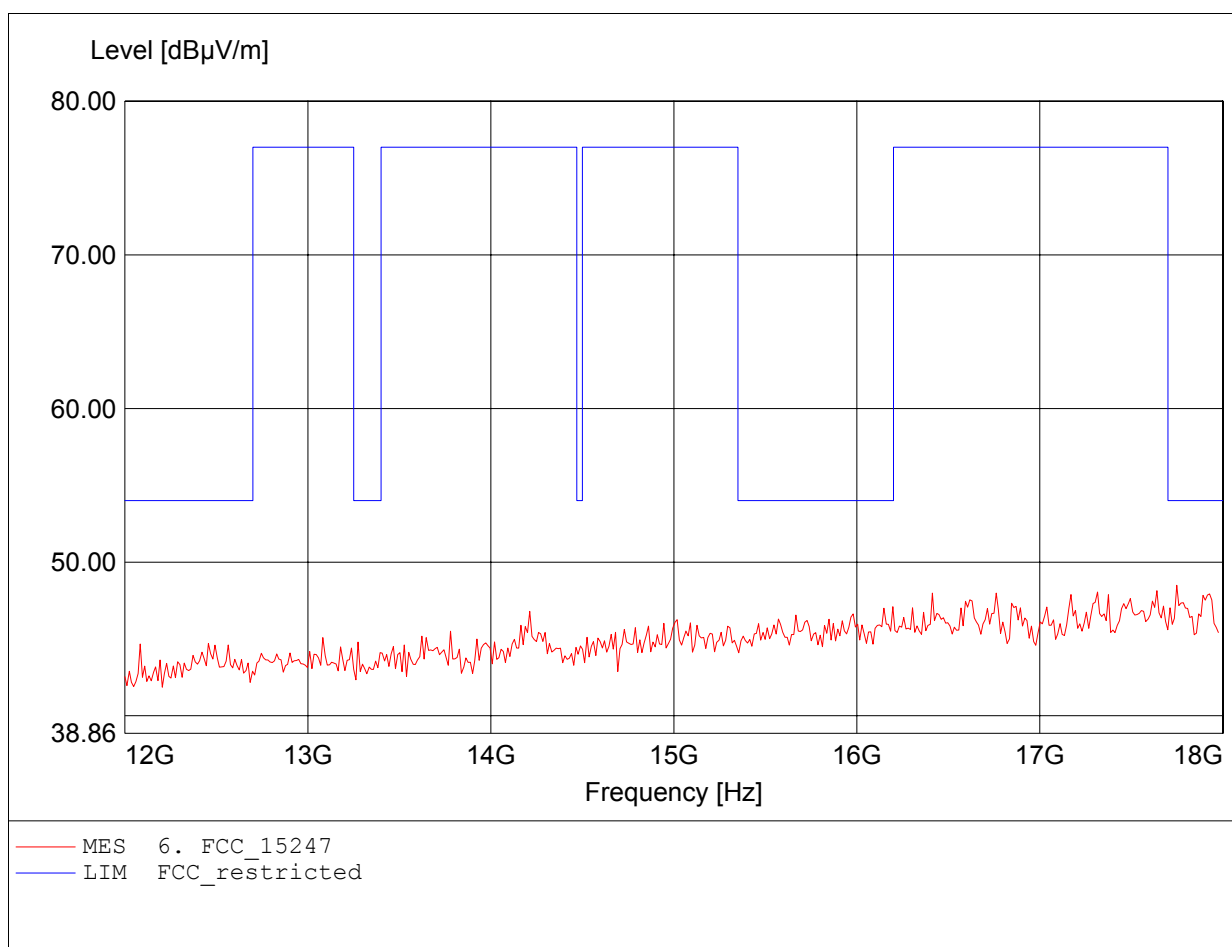


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: GN NETCOM A/S
EUT: BLUETOOTH HEADSET / Frequency: 2441 MHz
Model: MOTOROLA H15
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Schlaps
Test Conditions: 23°C / Unom.: 3.70 V DC (BATTERY)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 17.495GHz, Emax: 48.39dBµV/m, RBW: 1MHz

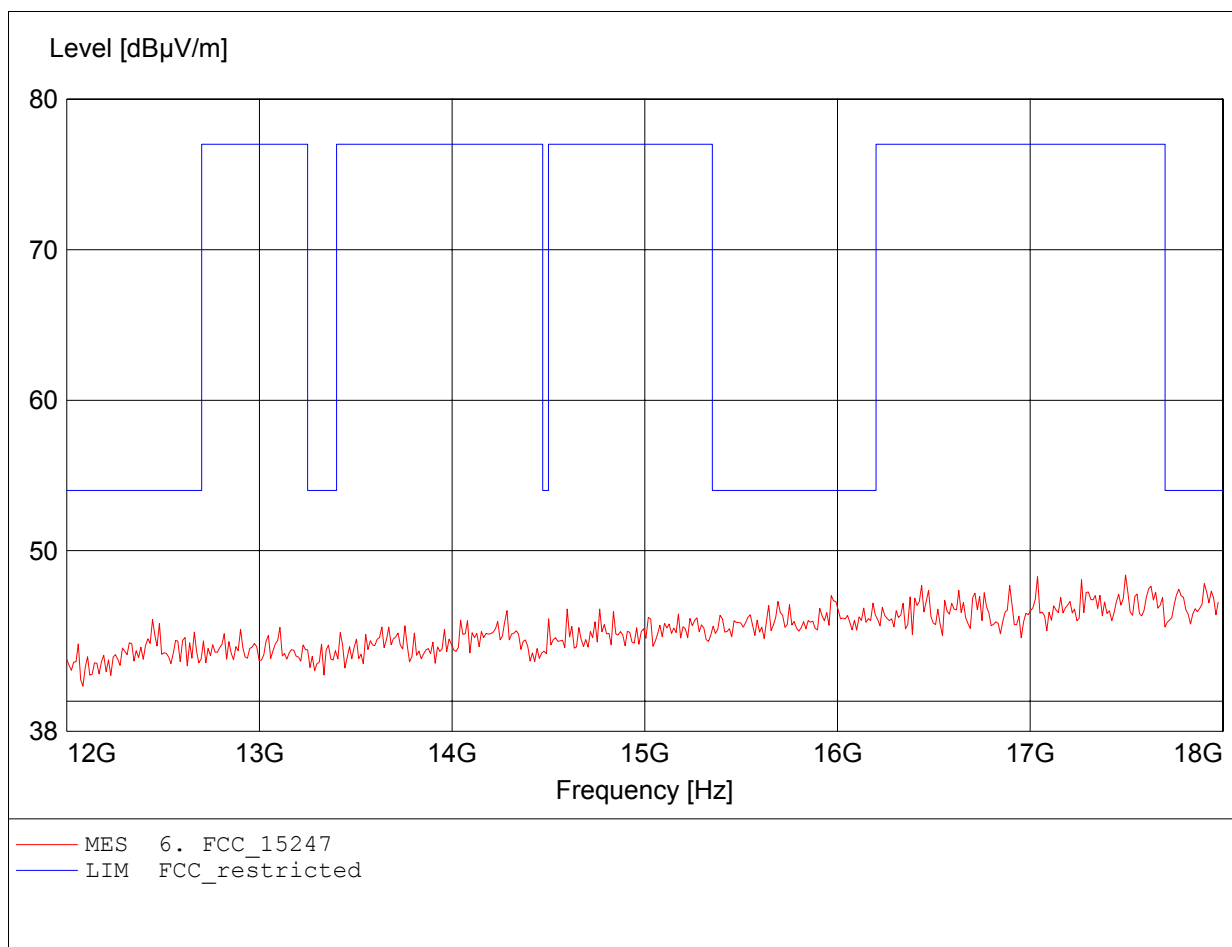


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: GN NETCOM A/S
EUT: BLUETOOTH HEADSET / Frequency: 2441 MHz
Model: MOTOROLA H15
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Schlaps
Test Conditions: 23°C / Unom.: 3.70 V DC (BATTERY)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 25.972GHz, Emax: 47.22dBµV/m, RBW: 1MHz

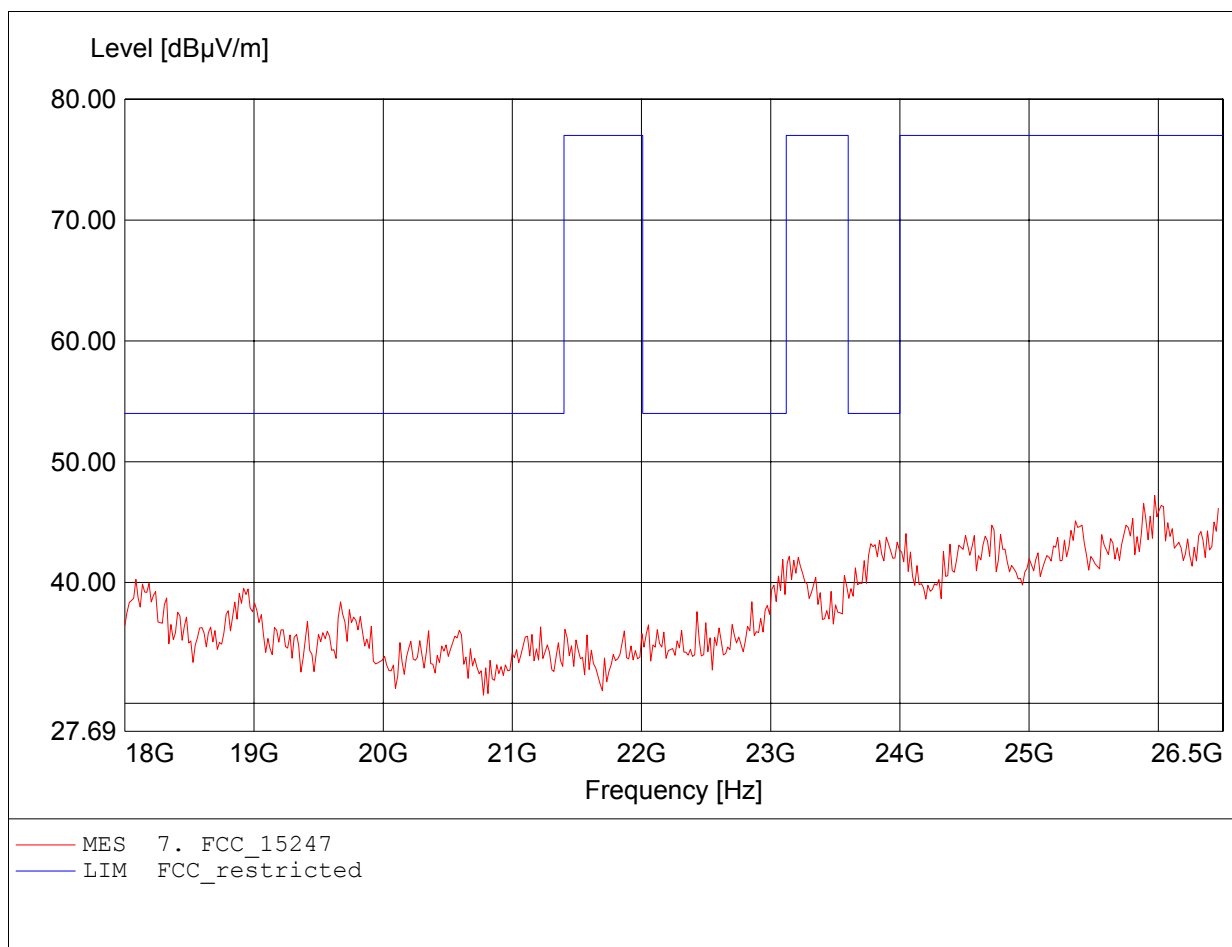


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: GN NETCOM A/S
EUT: BLUETOOTH HEADSET / Frequency: 2441 MHz
Model: MOTOROLA H15
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Schlaps
Test Conditions: 23°C / Unom.: 3.70 V DC (BATTERY)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.006GHz, Emax: 49.59dBµV/m, RBW: 1MHz

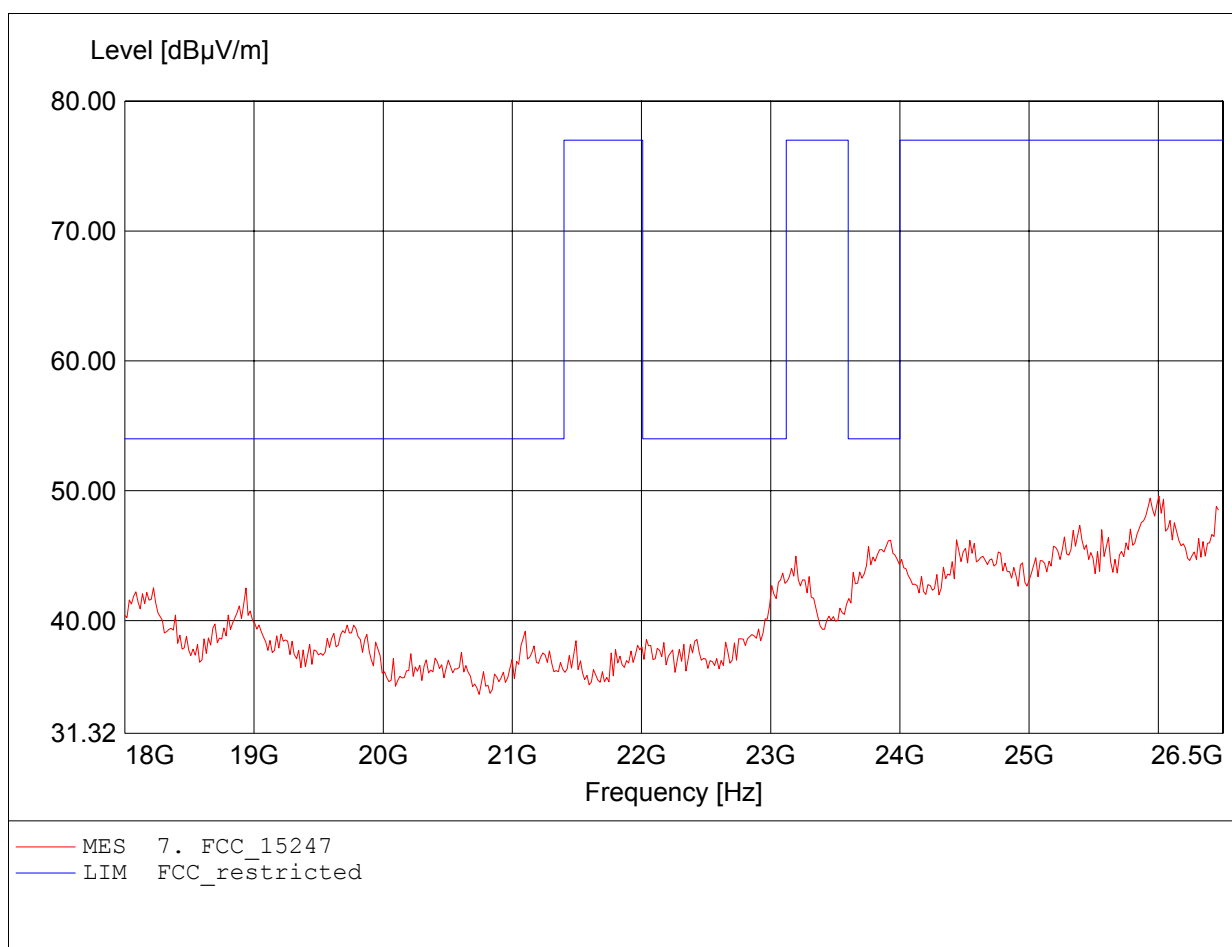


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: GN NETCOM A/S
EUT: BLUETOOTH HEADSET / Frequency: 2480 MHz
Model: MOTOROLA H15
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Schlaps
Test Conditions: 23°C / Unom.: 3.70 V DC (BATTERY)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 30.000MHz, Emax: 39.46dBµV/m, RBW: 100kHz

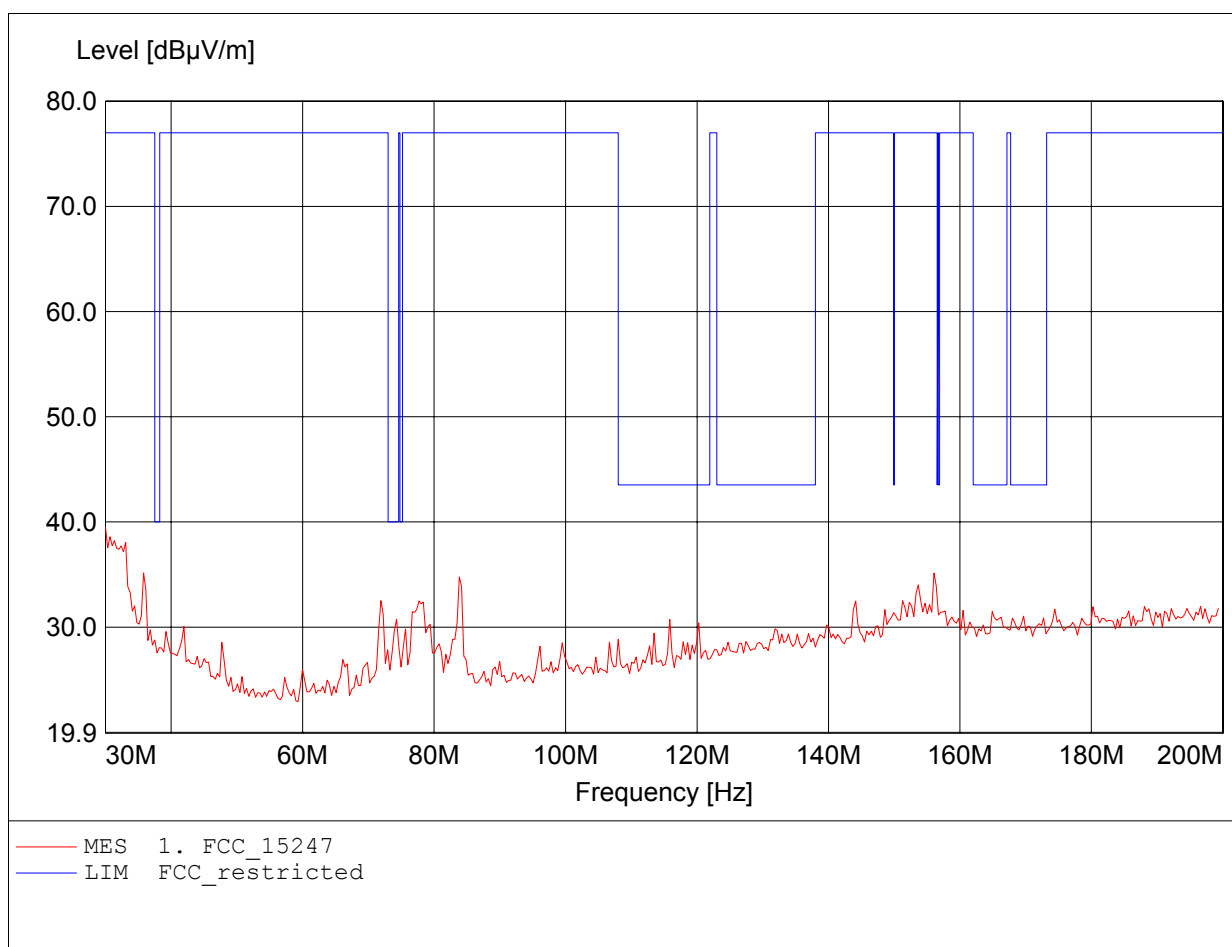


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: GN NETCOM A/S
EUT: BLUETOOTH HEADSET / Frequency: 2480 MHz
Model: MOTOROLA H15
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Schlaps
Test Conditions: 23°C / Unom.: 3.70 V DC (BATTERY)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 30.000MHz, Emax: 32.55dBµV/m, RBW: 100kHz

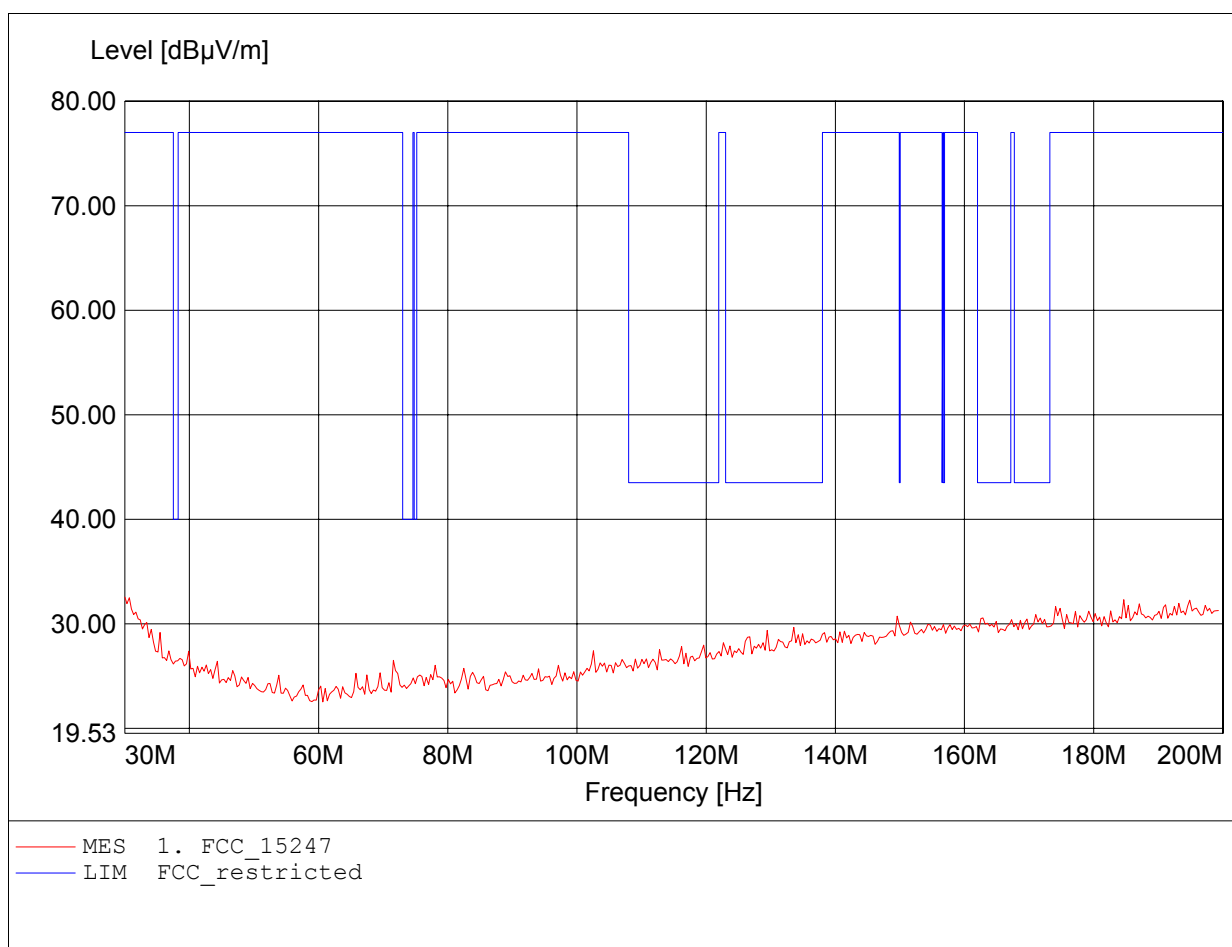


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: GN NETCOM A/S
EUT: BLUETOOTH HEADSET / Frequency: 2480 MHz
Model: MOTOROLA H15
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Schlaps
Test Conditions: 23°C / Unom.: 3.70 V DC (BATTERY)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 842.886MHz, Emax: 35.85dBµV/m, RBW: 100kHz

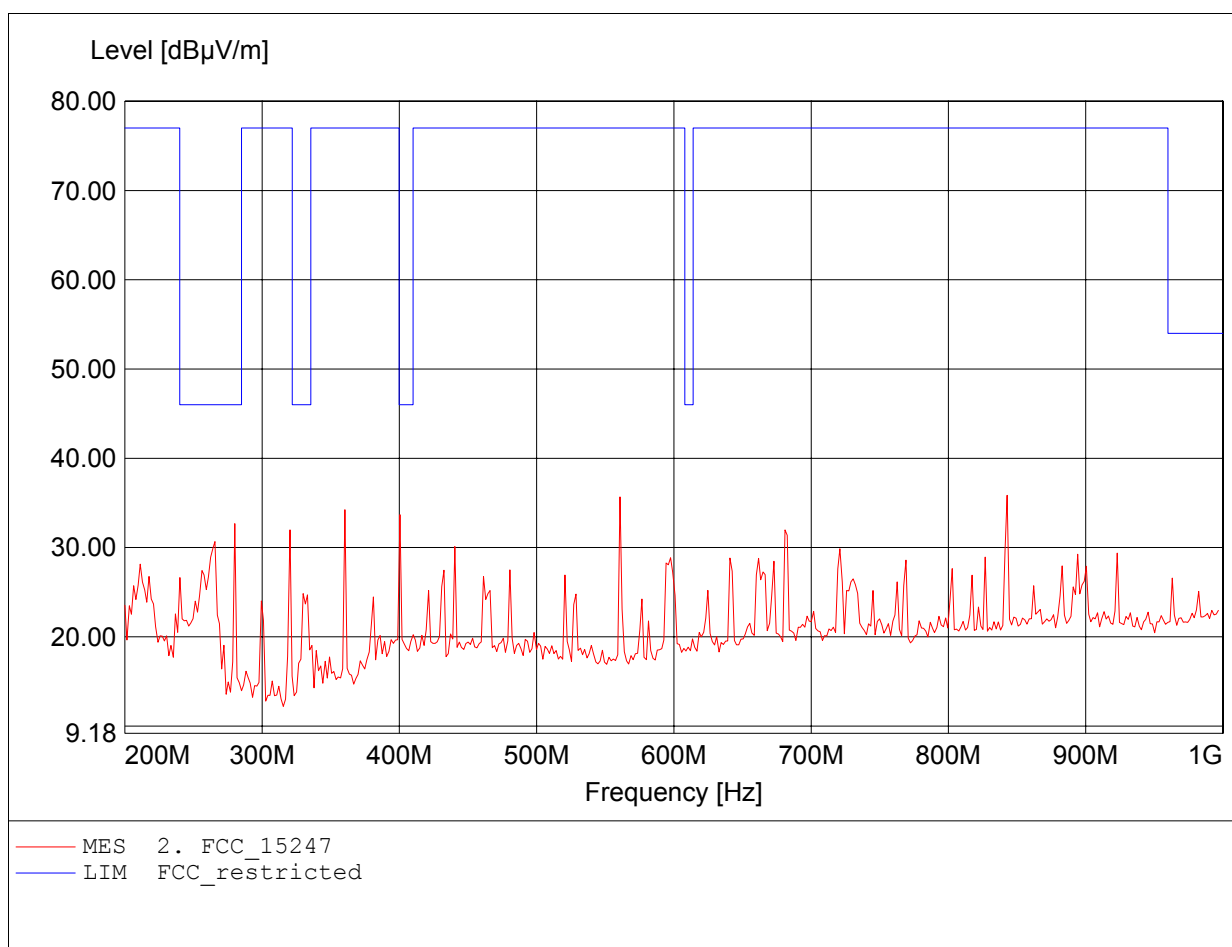


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: GN NETCOM A/S
EUT: BLUETOOTH HEADSET / Frequency: 2480 MHz
Model: MOTOROLA H15
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Schlaps
Test Conditions: 23°C / Unom.: 3.70 V DC (BATTERY)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 264.128MHz, Emax: 31.79dBµV/m, RBW: 100kHz

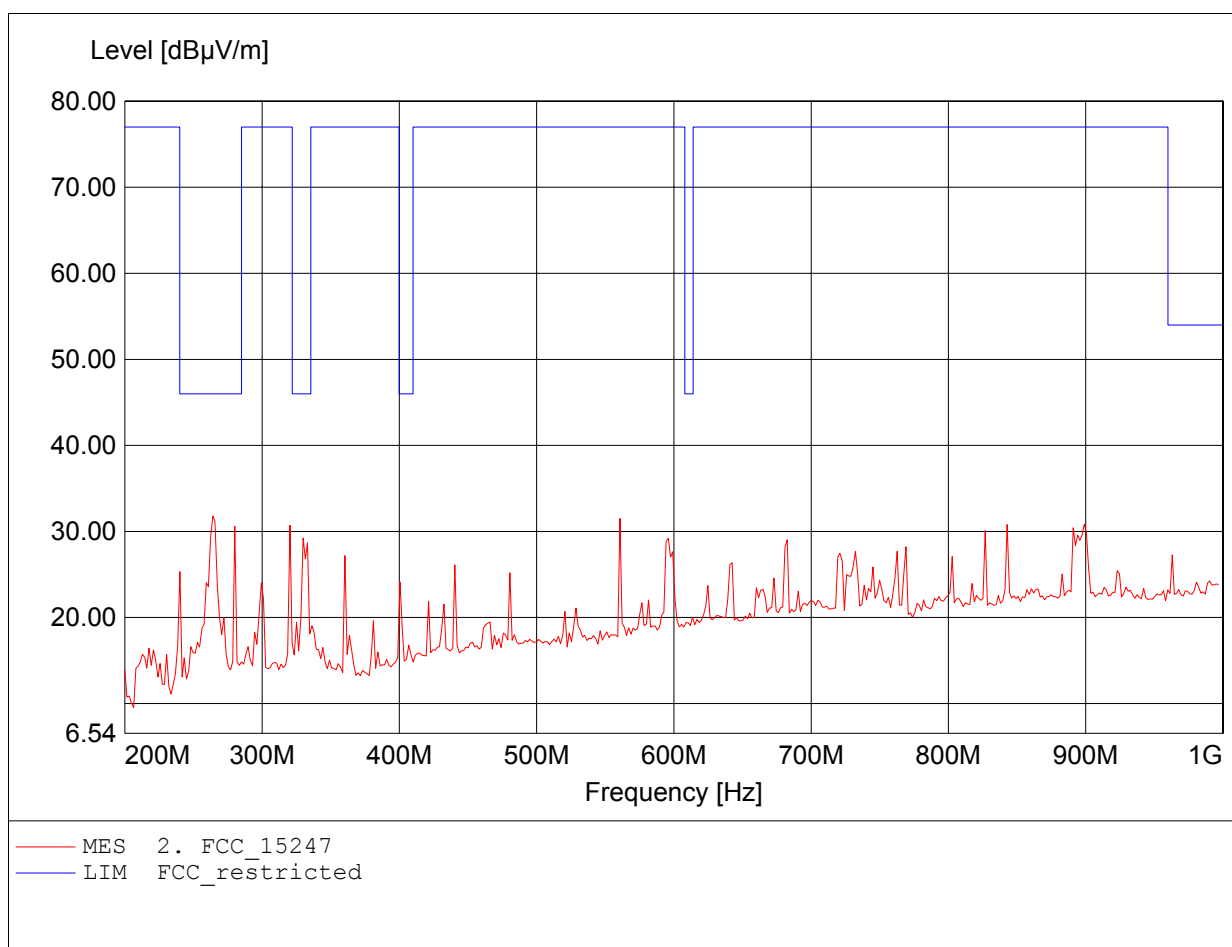


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: GN NETCOM A/S
EUT: BLUETOOTH HEADSET / Frequency: 2480 MHz
Model: MOTOROLA H15
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Schlaps
Test Conditions: 23°C / Unom.: 3.70 V DC (BATTERY)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.948GHz, Emax: 50.49dBµV/m, RBW: 1MHz

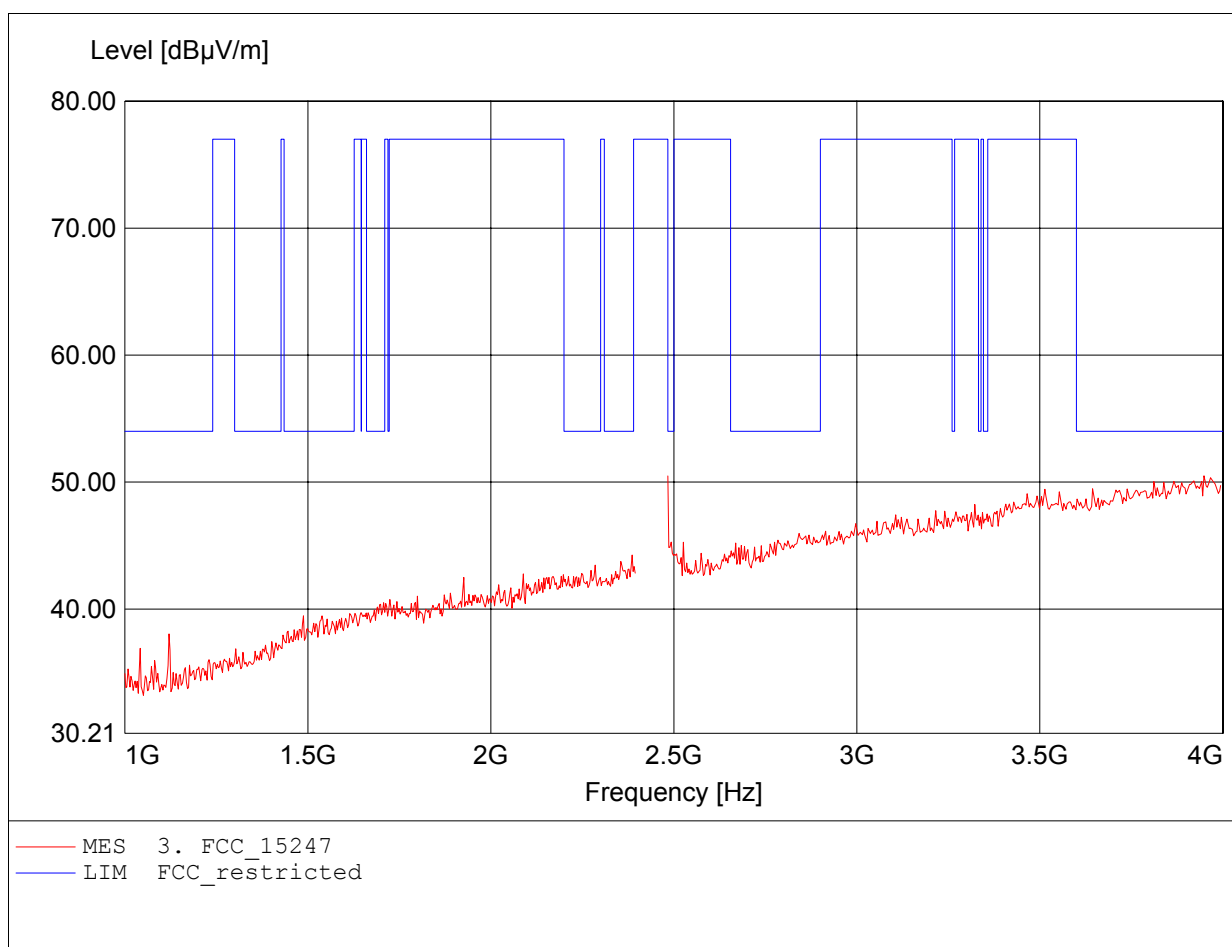


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: GN NETCOM A/S
EUT: BLUETOOTH HEADSET / Frequency: 2480 MHz
Model: MOTOROLA H15
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Schlaps
Test Conditions: 23°C / Unom.: 3.70 V DC (BATTERY)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.924GHz, Emax: 50.93dBµV/m, RBW: 1MHz

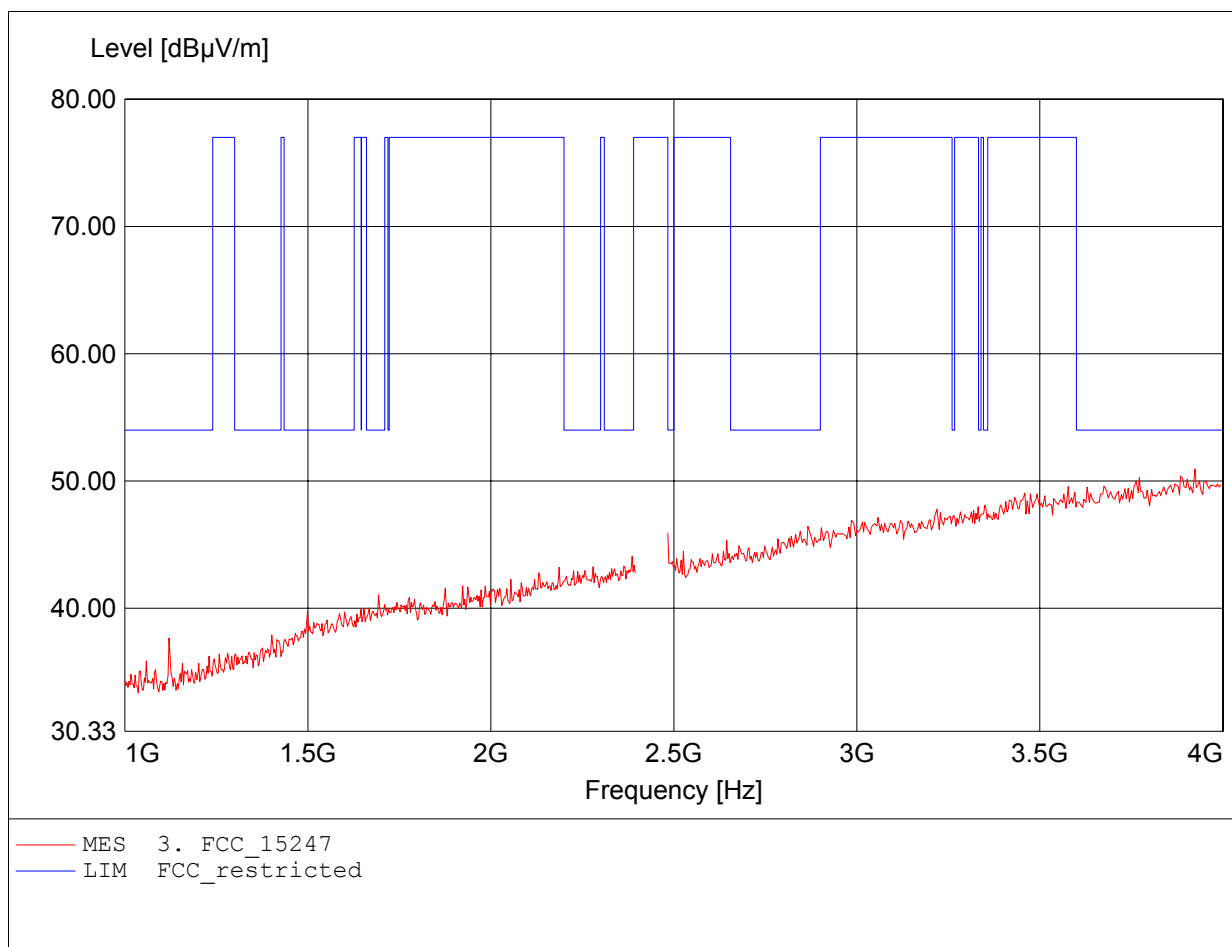


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: GN NETCOM A/S
EUT: BLUETOOTH HEADSET / Frequency: 2480 MHz
Model: MOTOROLA H15
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Schlaps
Test Conditions: 23°C / Unom.: 3.70 V DC (BATTERY)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.575GHz, Emax: 43.29dBµV/m, RBW: 1MHz

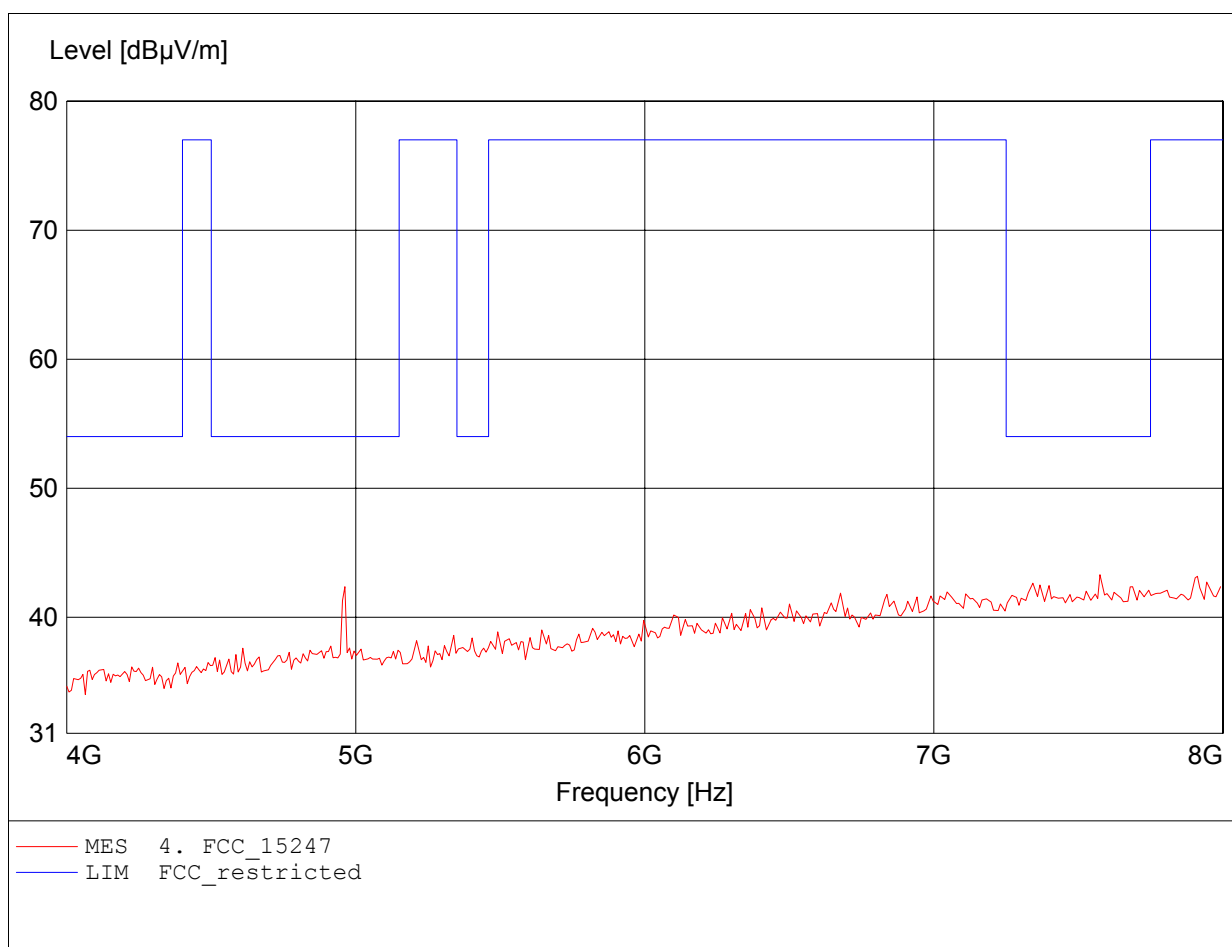


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: GN NETCOM A/S
EUT: BLUETOOTH HEADSET / Frequency: 2480 MHz
Model: MOTOROLA H15
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Schlaps
Test Conditions: 23°C / Unom.: 3.70 V DC (BATTERY)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.824GHz, Emax: 42.95dBµV/m, RBW: 1MHz

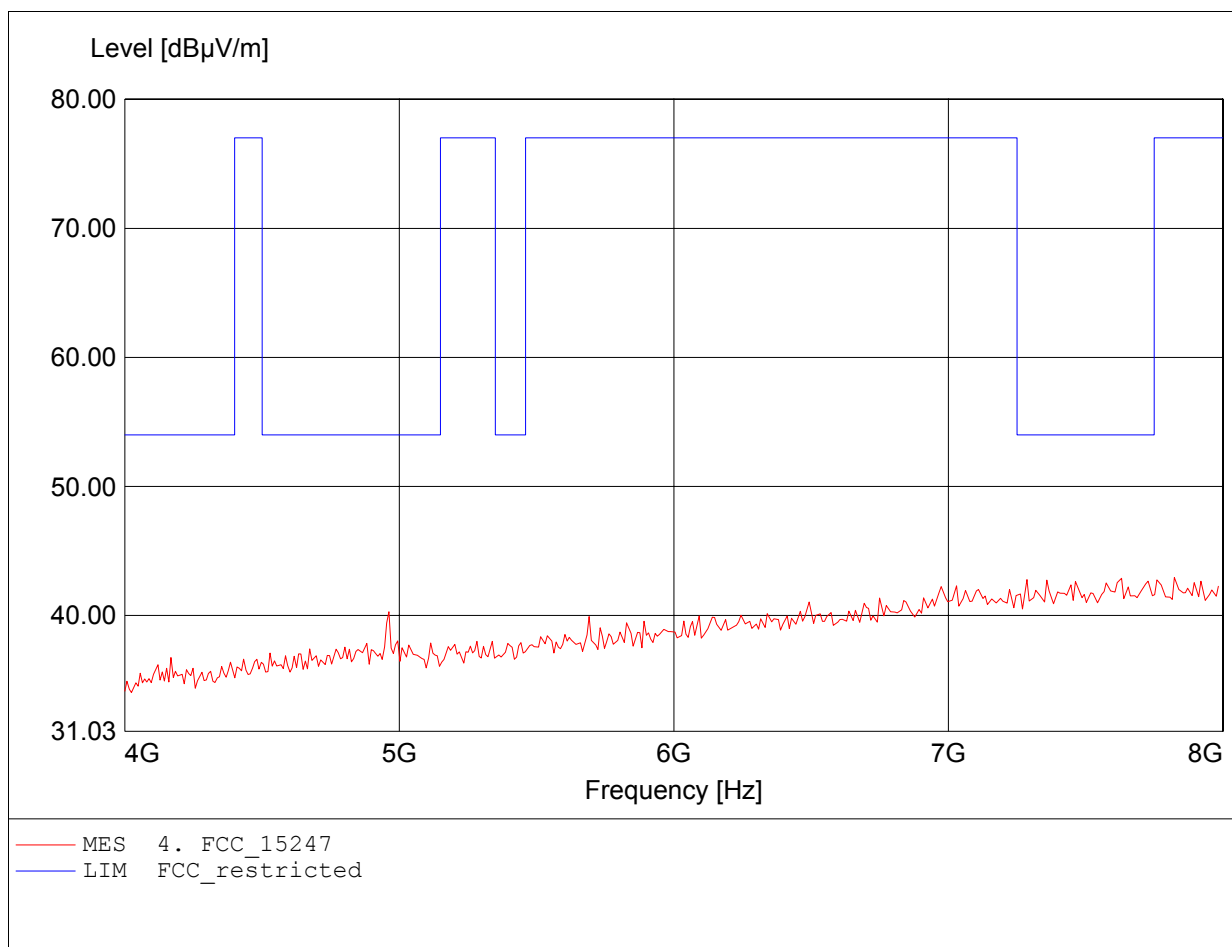


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: GN NETCOM A/S
EUT: BLUETOOTH HEADSET / Frequency: 2480 MHz
Model: MOTOROLA H15
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Schlaps
Test Conditions: 23°C / Unom.: 3.70 V DC (BATTERY)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.920GHz, Emax: 46.67dBµV/m, RBW: 1MHz

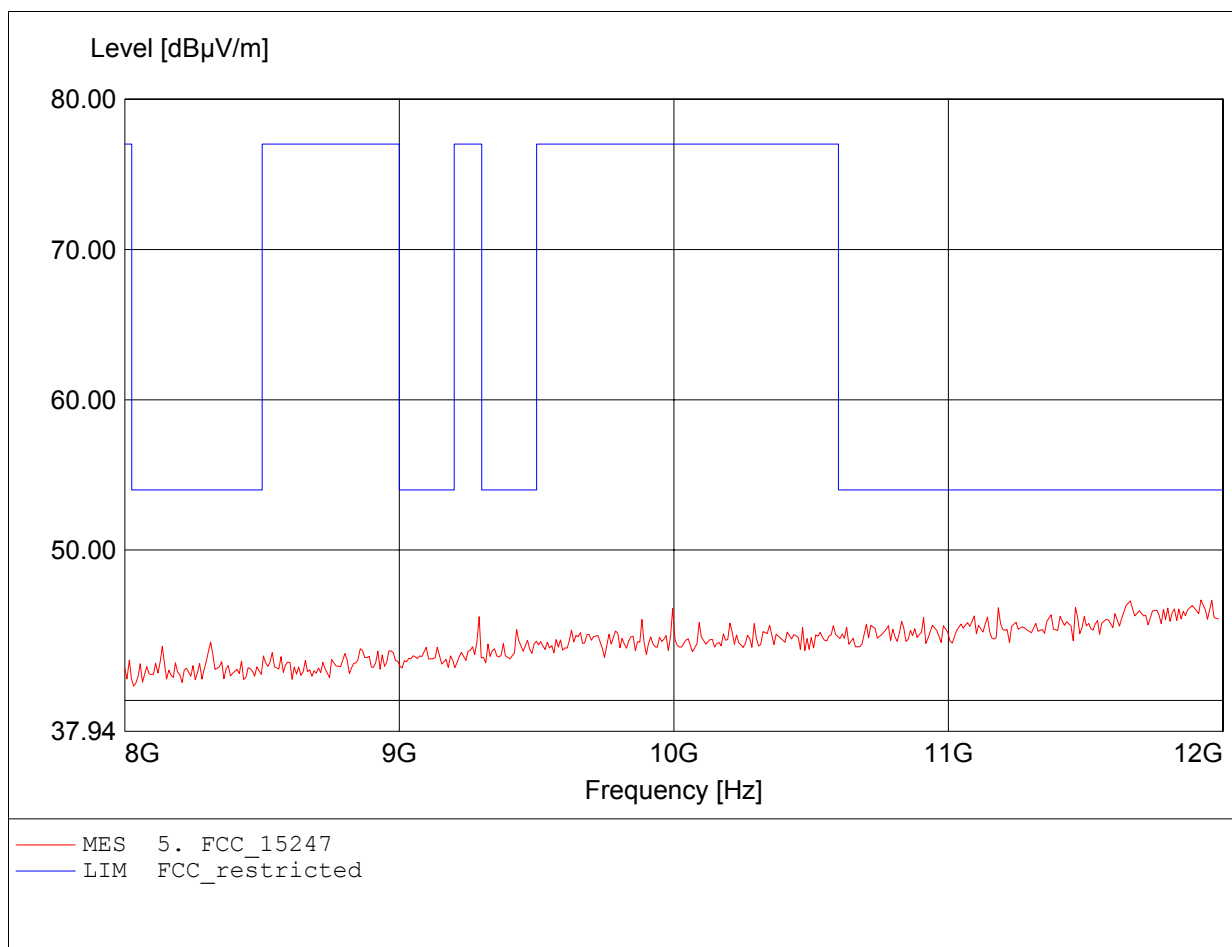


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: GN NETCOM A/S
EUT: BLUETOOTH HEADSET / Frequency: 2480 MHz
Model: MOTOROLA H15
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Schlaps
Test Conditions: 23°C / Unom.: 3.70 V DC (BATTERY)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.655GHz, Emax: 47.19dBµV/m, RBW: 1MHz

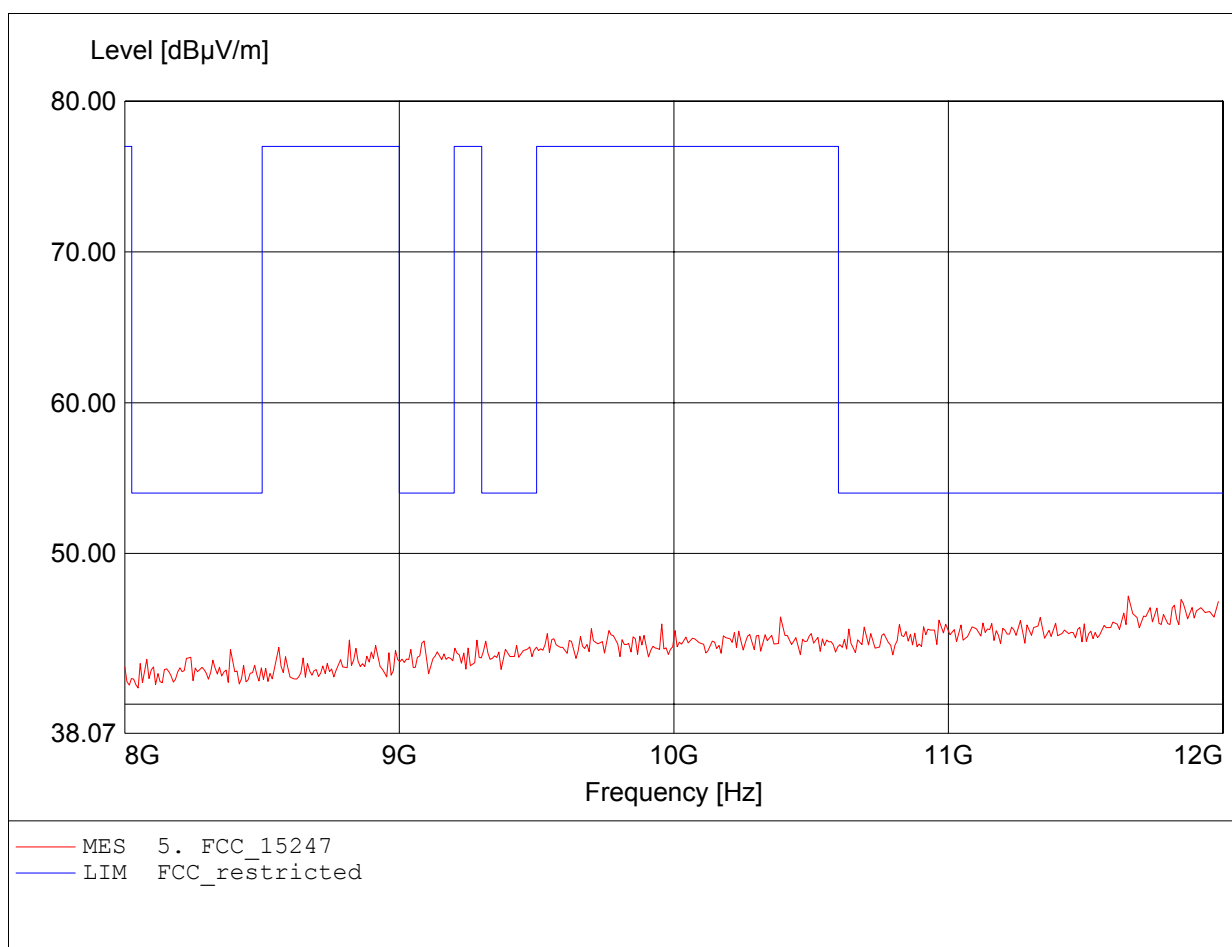


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: GN NETCOM A/S
EUT: BLUETOOTH HEADSET / Frequency: 2480 MHz
Model: MOTOROLA H15
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Schlaps
Test Conditions: 23°C / Unom.: 3.70 V DC (BATTERY)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 17.651GHz, Emax: 47.89dBµV/m, RBW: 1MHz

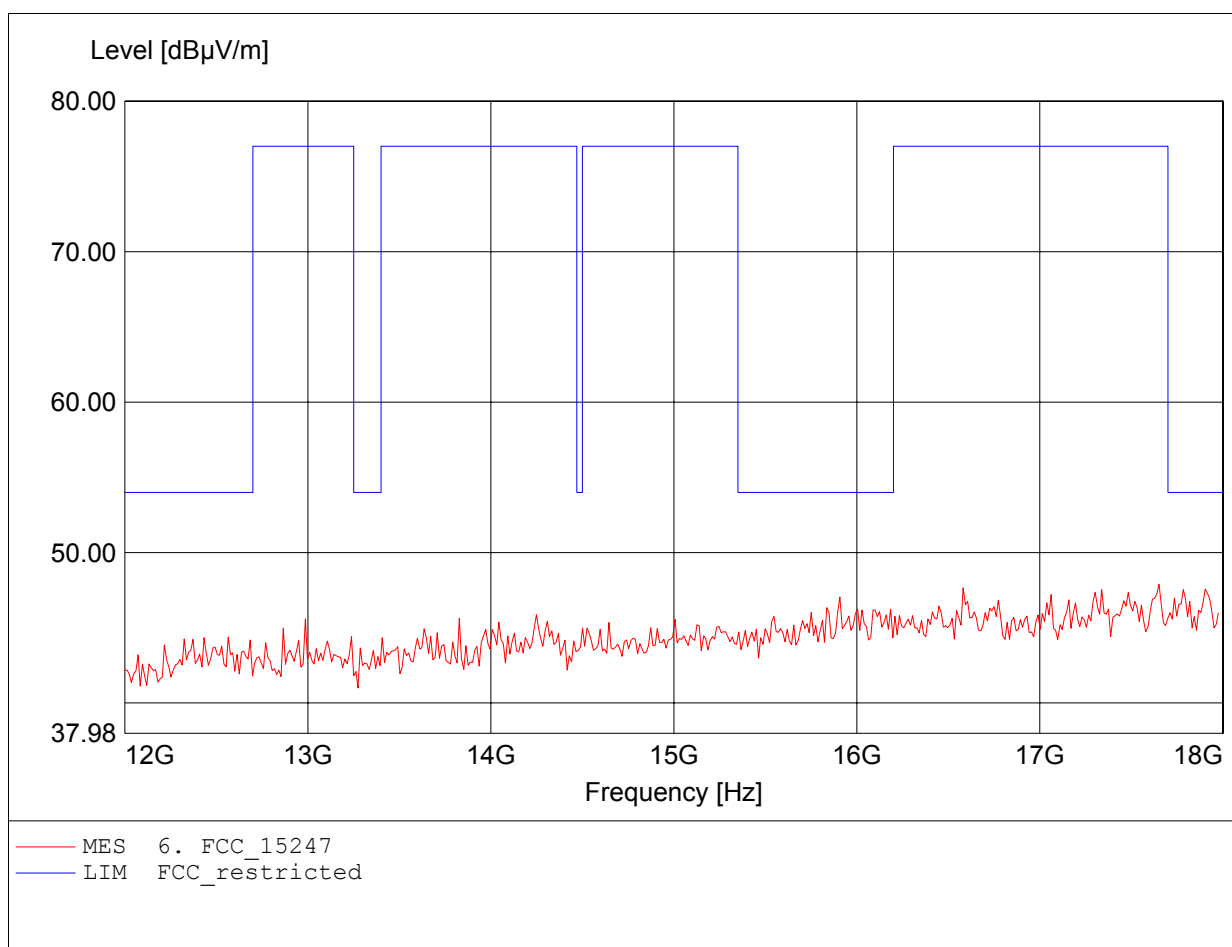


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: GN NETCOM A/S
EUT: BLUETOOTH HEADSET / Frequency: 2480 MHz
Model: MOTOROLA H15
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Schlaps
Test Conditions: 23°C / Unom.: 3.70 V DC (BATTERY)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 17.495GHz, Emax: 48.82dBµV/m, RBW: 1MHz

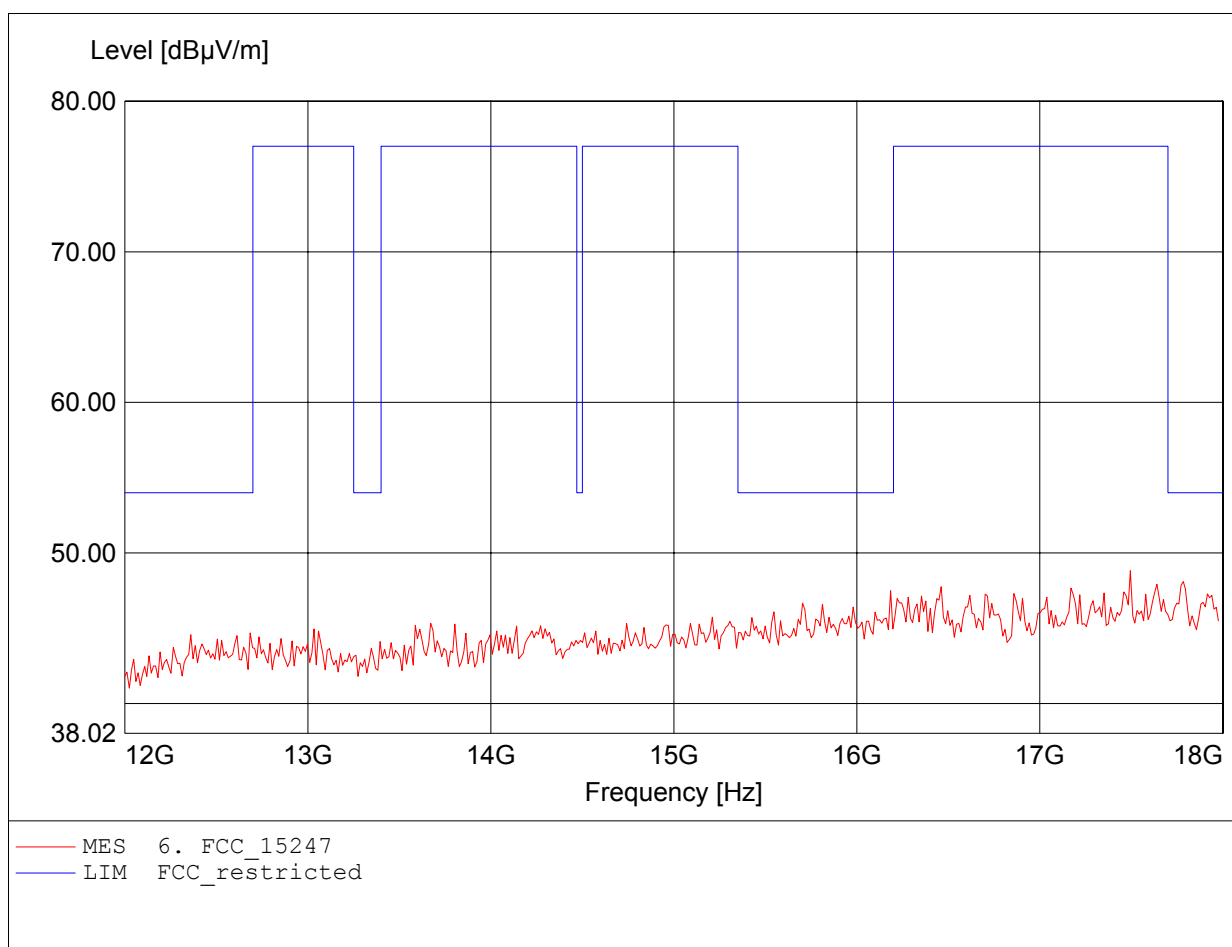


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: GN NETCOM A/S
EUT: BLUETOOTH HEADSET / Frequency: 2480 MHz
Model: MOTOROLA H15
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Schlaps
Test Conditions: 23°C / Unom.: 3.70 V DC (BATTERY)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 25.870GHz, Emax: 47.89dBµV/m, RBW: 1MHz

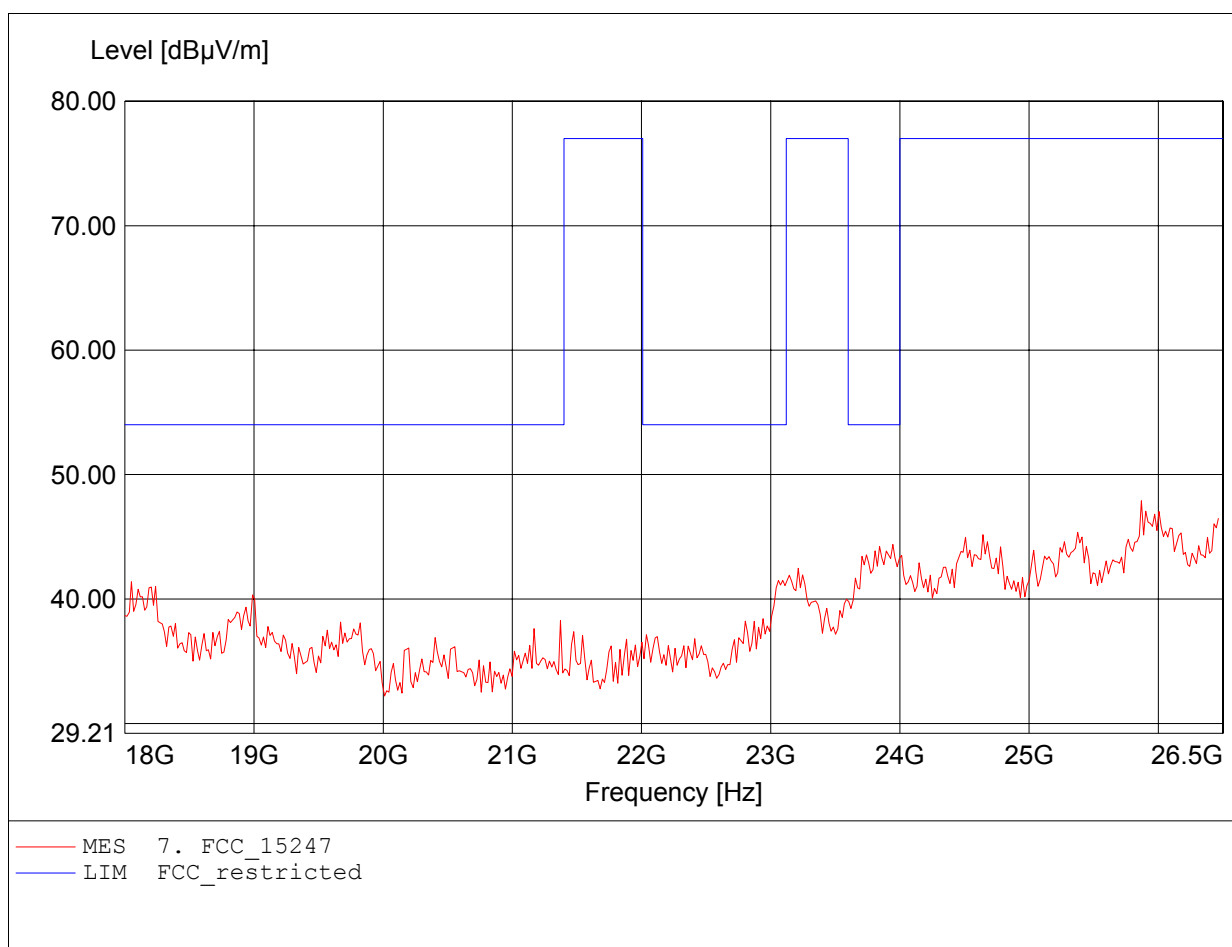

**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: GN NETCOM A/S
EUT: BLUETOOTH HEADSET / Frequency: 2480 MHz
Model: MOTOROLA H15
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Schlaps
Test Conditions: 23°C / Unom.: 3.70 V DC (BATTERY)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.023GHz, Emax: 48.04dBµV/m, RBW: 1MHz

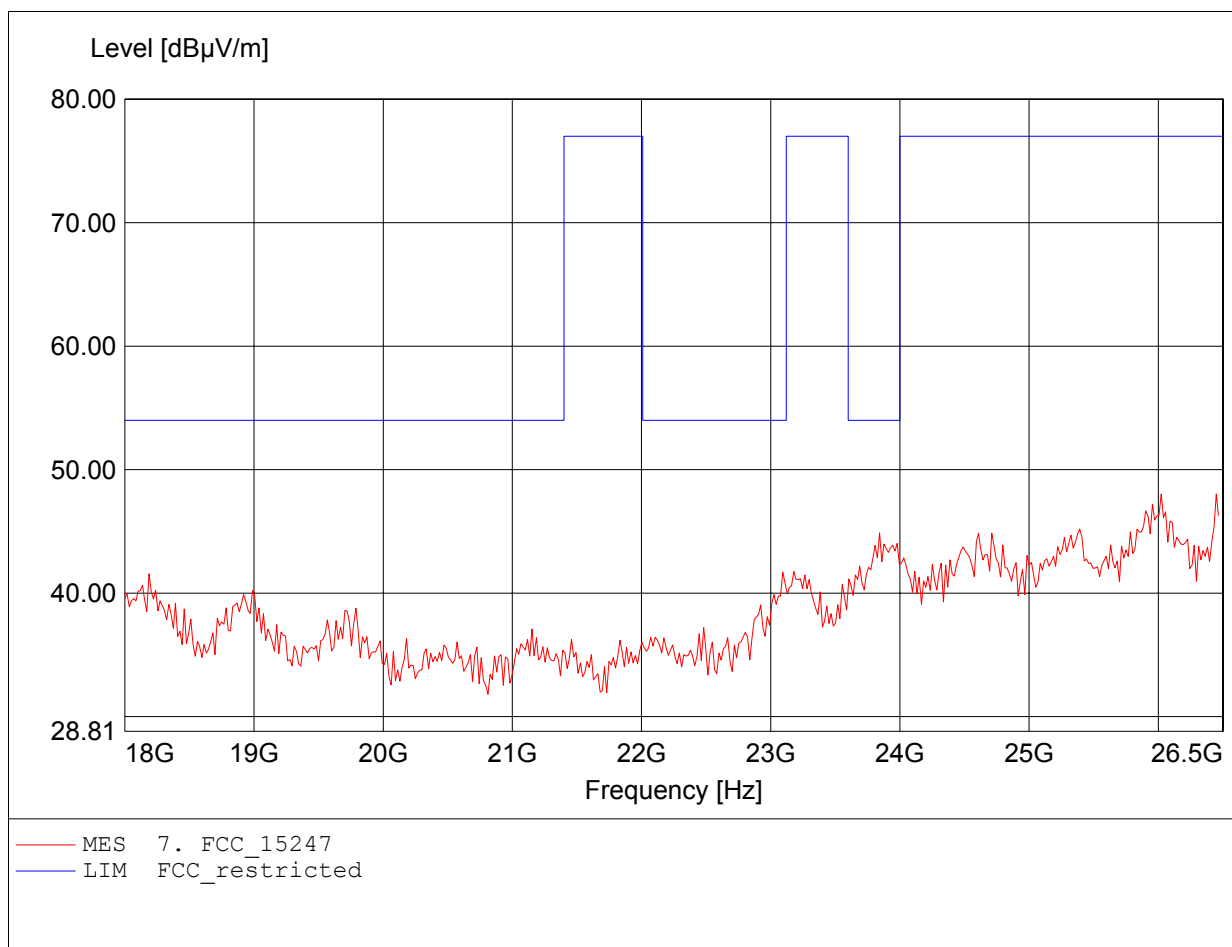

Annex H


Band-edge compliance

FCC part 15.247
Band-edge compliance of RF conducted emissions

| | |
|-----------------------|---|
| EUT | Bluetooth Headset |
| Model | Motorola H15 |
| Approval Holder | GN Netcom A/S |
| Temperature / Voltage | 25°C / Unom |
| Test Site / Operator | Eurofins ETS Product Service GmbH / Mr. Hoppe |
| Test Specification | FCC part 15 section 247(c) |
| Comment 1 | Band-edge compliance |
| Comment 2 | Channel.: 0 / 2402 MHz |
| Comment 3 | Single frequency mode |



| | | | | |
|--------------|-----------------|--------|--------|----------|
| Delta 1 [T1] | RBW | 50 kHz | RF Att | 30 dB |
| Ref Lvl | -46.08 dB | VBW | 50 kHz | |
| 10 dBm | -2.53507014 MHz | SWT | 5 ms | Unit dBm |

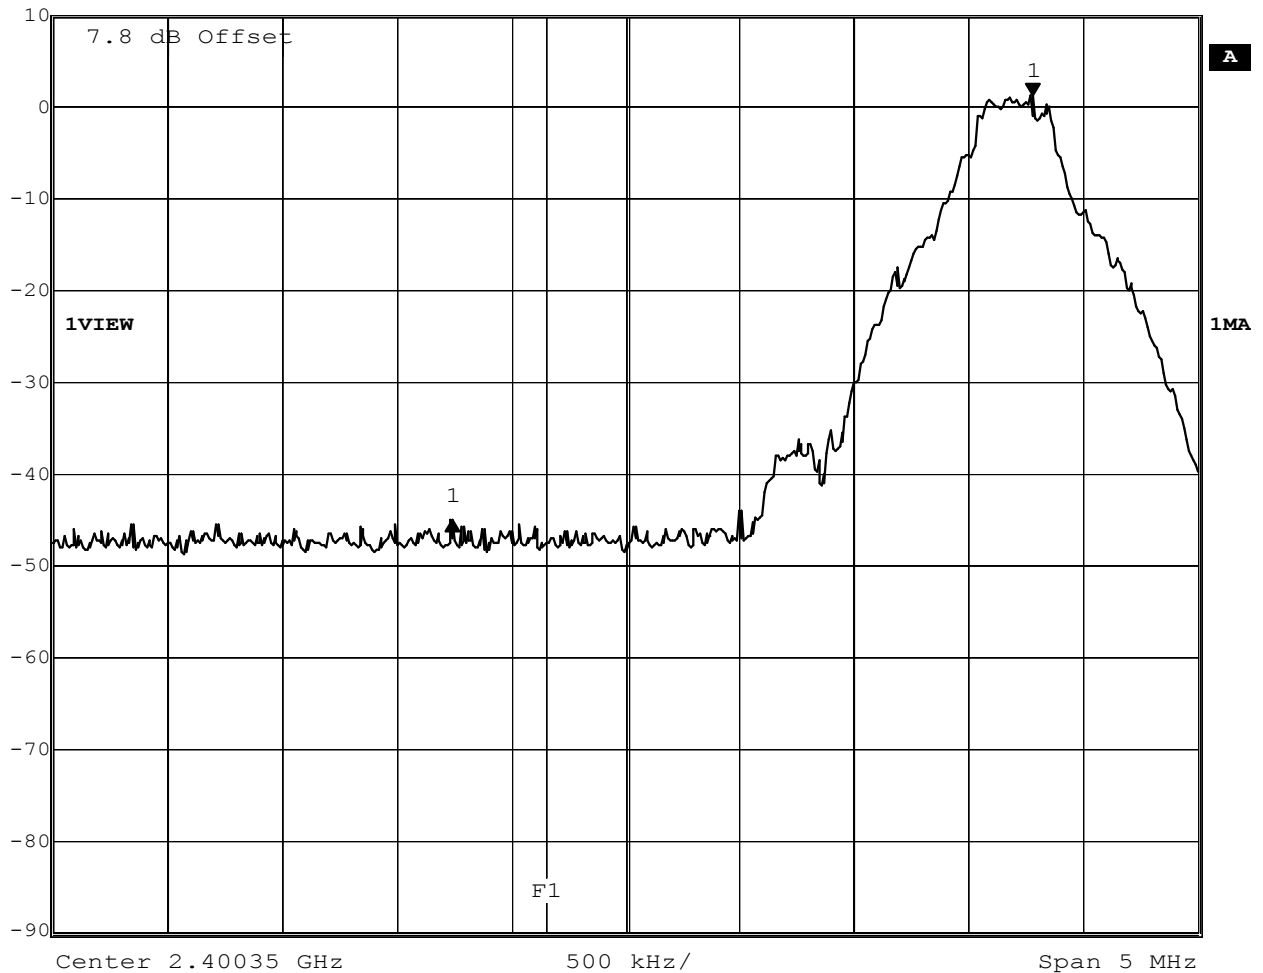

Comment A: Limit: Marker Delta value >20 dB; Result: PASS
 Date: 3.MAR.2008 15:28:53

Measurement diagram


Eurofins ETS Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

FCC part 15.247
Band-edge compliance of RF conducted emissions

| | |
|-----------------------|---|
| EUT | Bluetooth Headset |
| Model | Motorola H15 |
| Approval Holder | GN Netcom A/S |
| Temperature / Voltage | 25°C / Unom |
| Test Site / Operator | Eurofins ETS Product Service GmbH / Mr. Hoppe |
| Test Specification | FCC part 15 section 247(c) |
| Comment 1 | Band-edge compliance |
| Comment 2 | Channel.: 78 / 2480 MHz |
| Comment 3 | Single frequency mode |



| | | | | |
|--------------|----------------|--------|--------|----------|
| Delta 1 [T1] | RBW | 50 kHz | RF Att | 30 dB |
| Ref Lvl | -47.12 dB | VBW | 50 kHz | |
| 10 dBm | 3.83767535 MHz | SWT | 5 ms | Unit dBm |

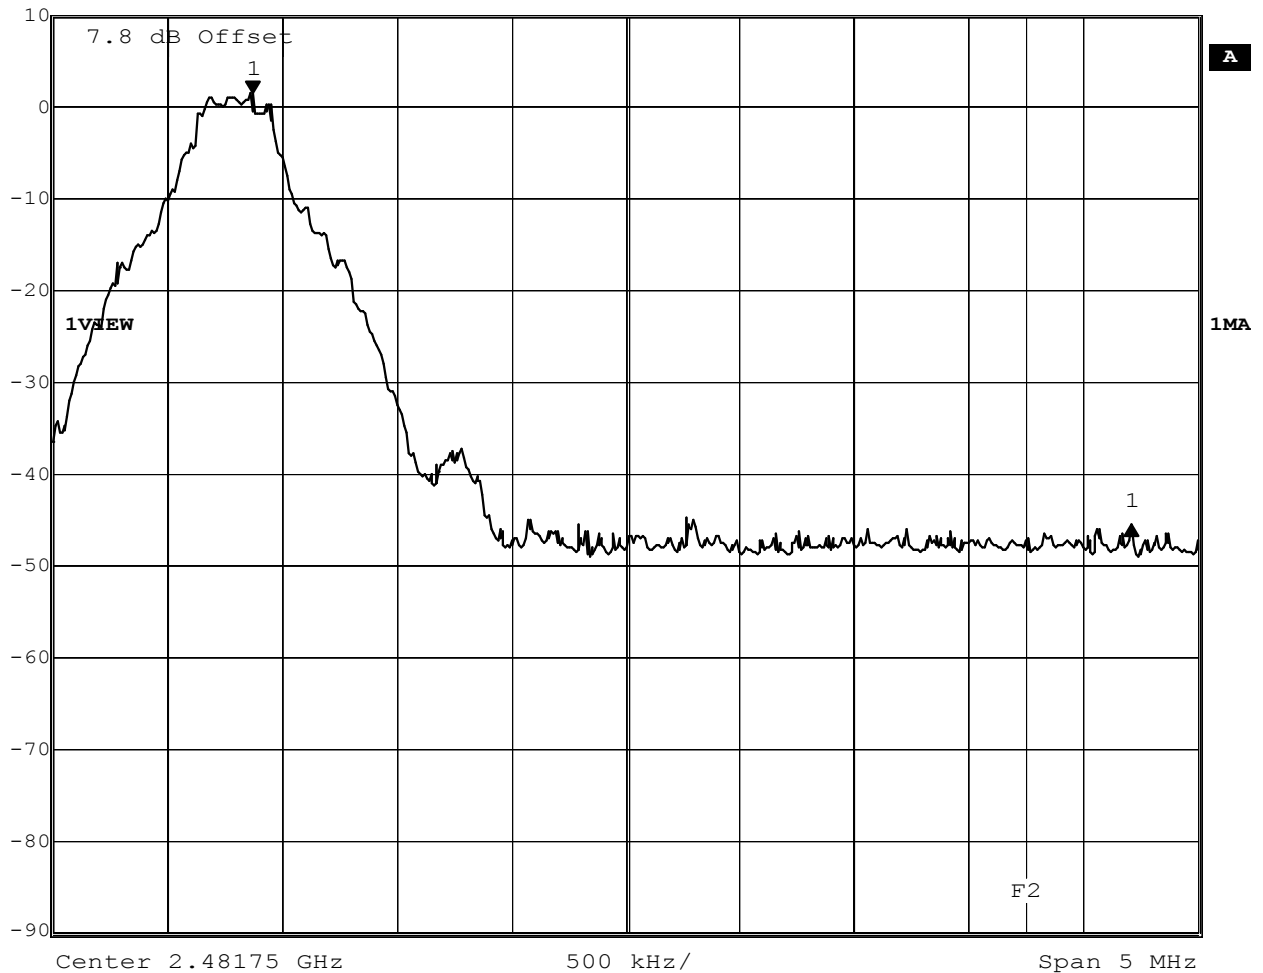


Comment A: Limit: Marker Delta value >20 dB; Result: PASS
 Date: 3.MAR.2008 15:26:53


Measurement diagram

Eurofins ETS Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

FCC part 15.247
Band-edge compliance of RF conducted emissions

| | |
|-----------------------|---|
| EUT | Bluetooth Headset |
| Model | Motorola H15 |
| Approval Holder | GN Netcom A/S |
| Temperature / Voltage | 25°C / Unom |
| Test Site / Operator | Eurofins ETS Product Service GmbH / Mr. Hoppe |
| Test Specification | FCC part 15 section 247(c) |
| Comment 1 | Band-edge compliance |
| Comment 2 | Channel.: 0 / 2402 MHz |
| Comment 3 | Hopping mode |

| | | | | | |
|---|--------------|-----------------|--------|--------|----------|
|  | Delta 1 [T1] | RBW | 50 kHz | RF Att | 30 dB |
| | Ref Lvl | -45.09 dB | VBW | 50 kHz | |
| | 10 dBm | -4.09819639 MHz | SWT | 5 ms | Unit dBm |

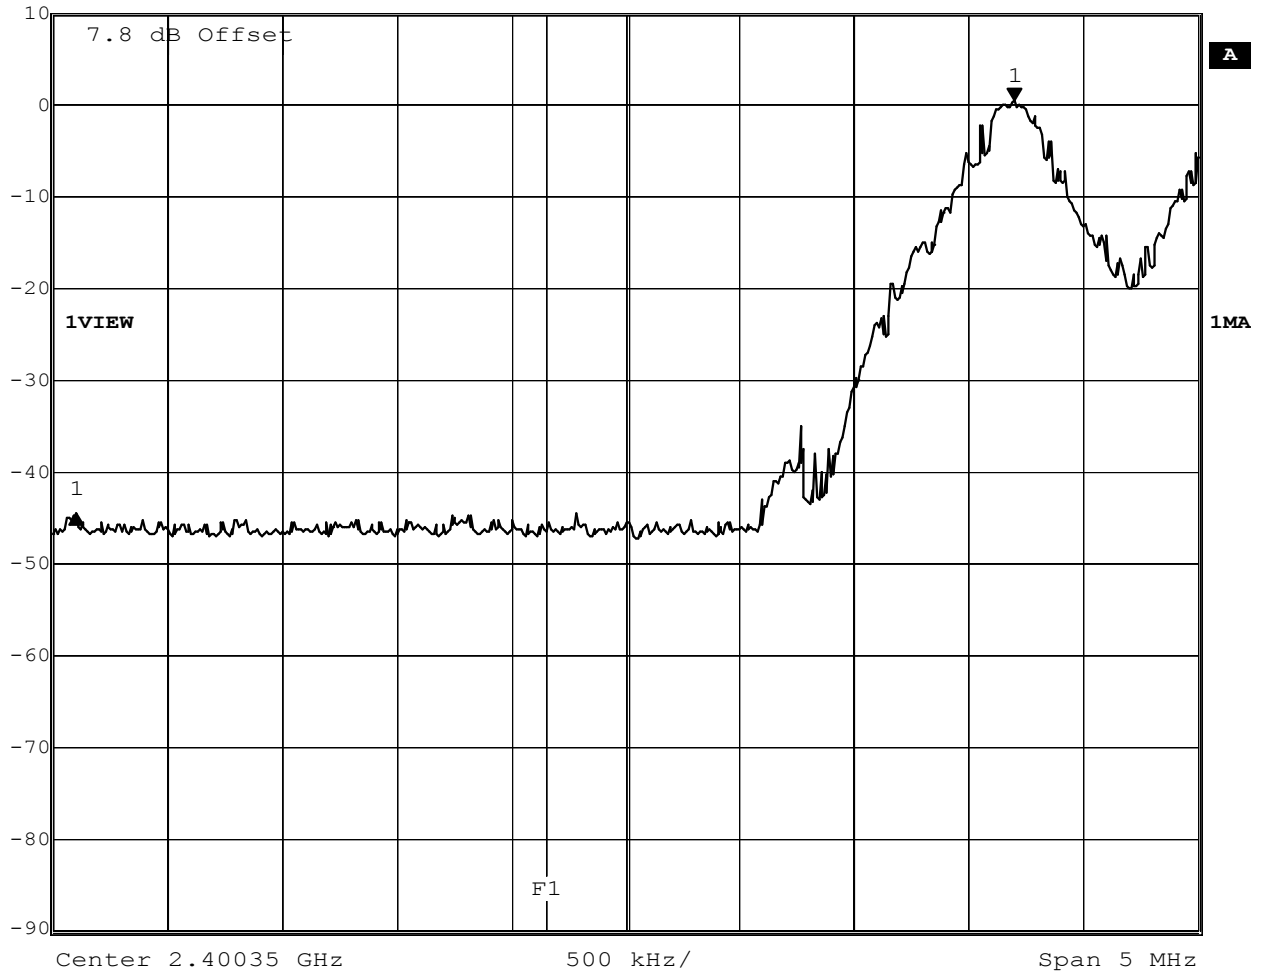


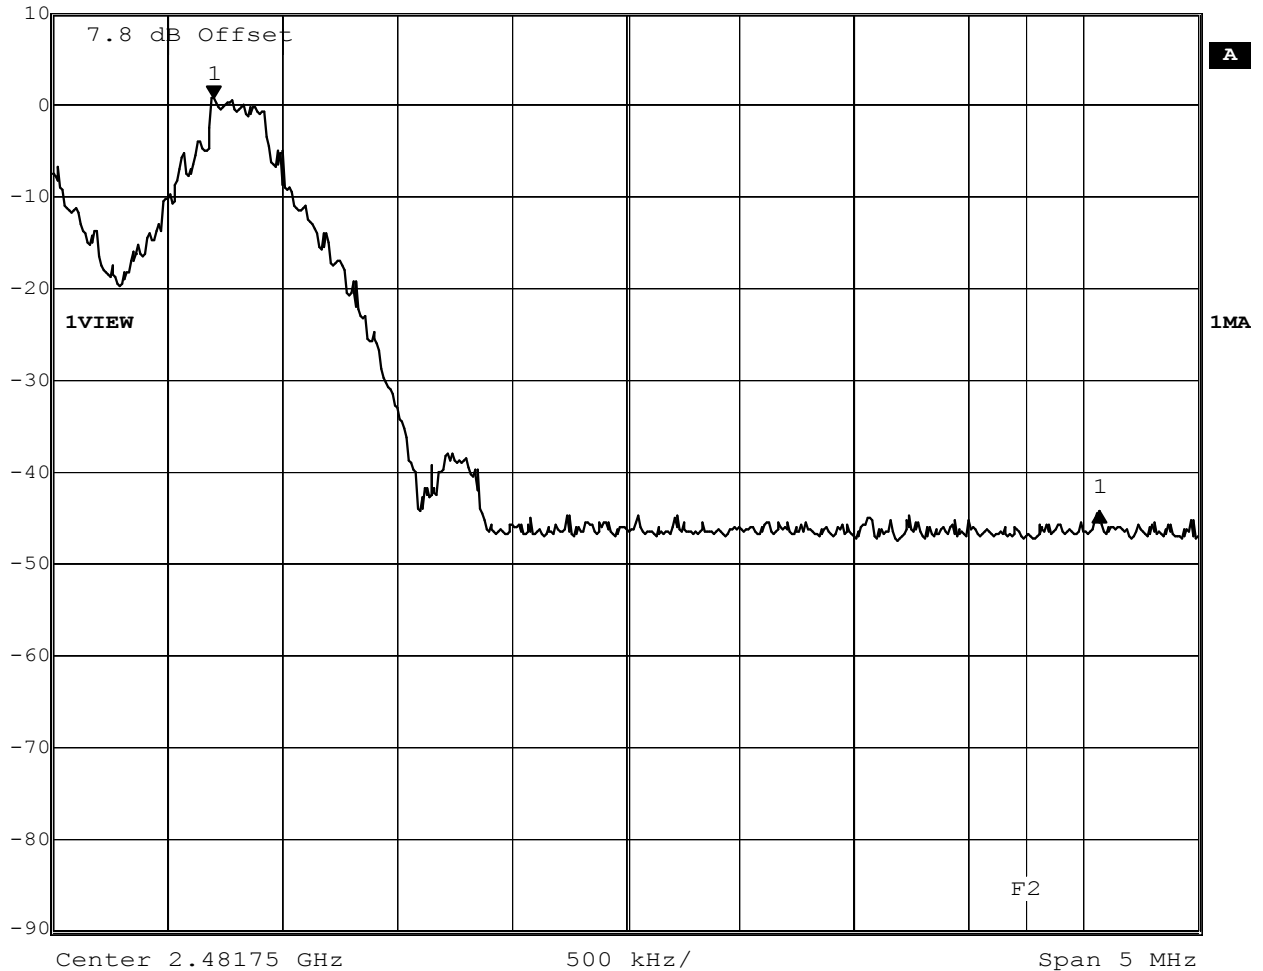
Comment A: Limit: Marker Delta value >20 dB; Result: PASS
 Date: 3.MAR.2008 15:33:57

Measurement diagram

FCC part 15.247
Band-edge compliance of RF conducted emissions

| | |
|-----------------------|---|
| EUT | Bluetooth Headset |
| Model | Motorola H15 |
| Approval Holder | GN Netcom A/S |
| Temperature / Voltage | 25°C / Unom |
| Test Site / Operator | Eurofins ETS Product Service GmbH / Mr. Hoppe |
| Test Specification | FCC part 15 section 247(c) |
| Comment 1 | Band-edge compliance |
| Comment 2 | Channel.: 78 / 2480 MHz |
| Comment 3 | Hopping mode |

| | | | | | |
|---|----------------|-----|--------|--------|-------|
|  | Delta 1 [T1] | RBW | 50 kHz | RF Att | 30 dB |
| Ref Lvl | -45.07 dB | VBW | 50 kHz | | |
| 10 dBm | 3.86773547 MHz | SWT | 5 ms | Unit | dBm |



Comment A: Limit: Marker Delta value >20 dB; Result: PASS
 Date: 3.MAR.2008 15:41:42


Measurement diagram

Annex I

AC power line conducted emissions


EMI voltage test in the ac-mains according to FCC part 15

Approval Holder: GN Netcom A/S
 EUT: Bluetooth Headset
 Model: Motorola H15
 Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Pflug
 Test Conditions: Unom: 120 V AC (AC/DC-ADAPTOR), Tnom: 23°C
 Test Specification: V-Network: ESH2-Z5 (N)
 Comment 1: mode: charging
 Comment 2: adaptor: motorola FMP5334A

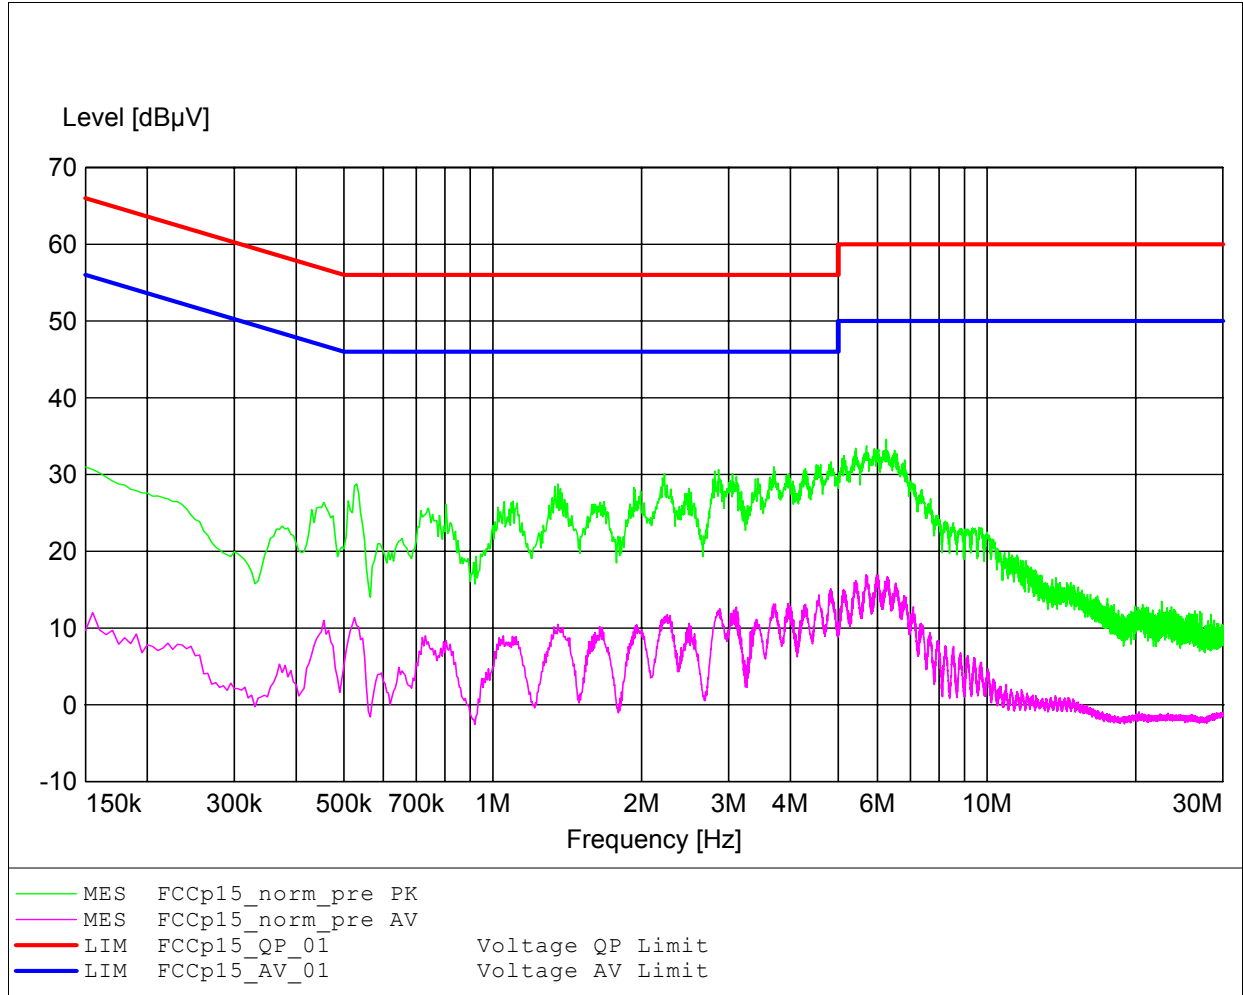

EMI voltage test in the ac-mains according to FCC part 15

Approval Holder: GN Netcom A/S
 EUT: Bluetooth Headset
 Model: Motorola H15
 Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Pflug
 Test Conditions: Unom: 120 V AC (AC/DC-ADAPTOR), Tnom: 23°C
 Test Specification: V-Network: ESH2-Z5 (N)
 Comment 1: mode: charging
 Comment 2: adaptor: motorola FMP5334A

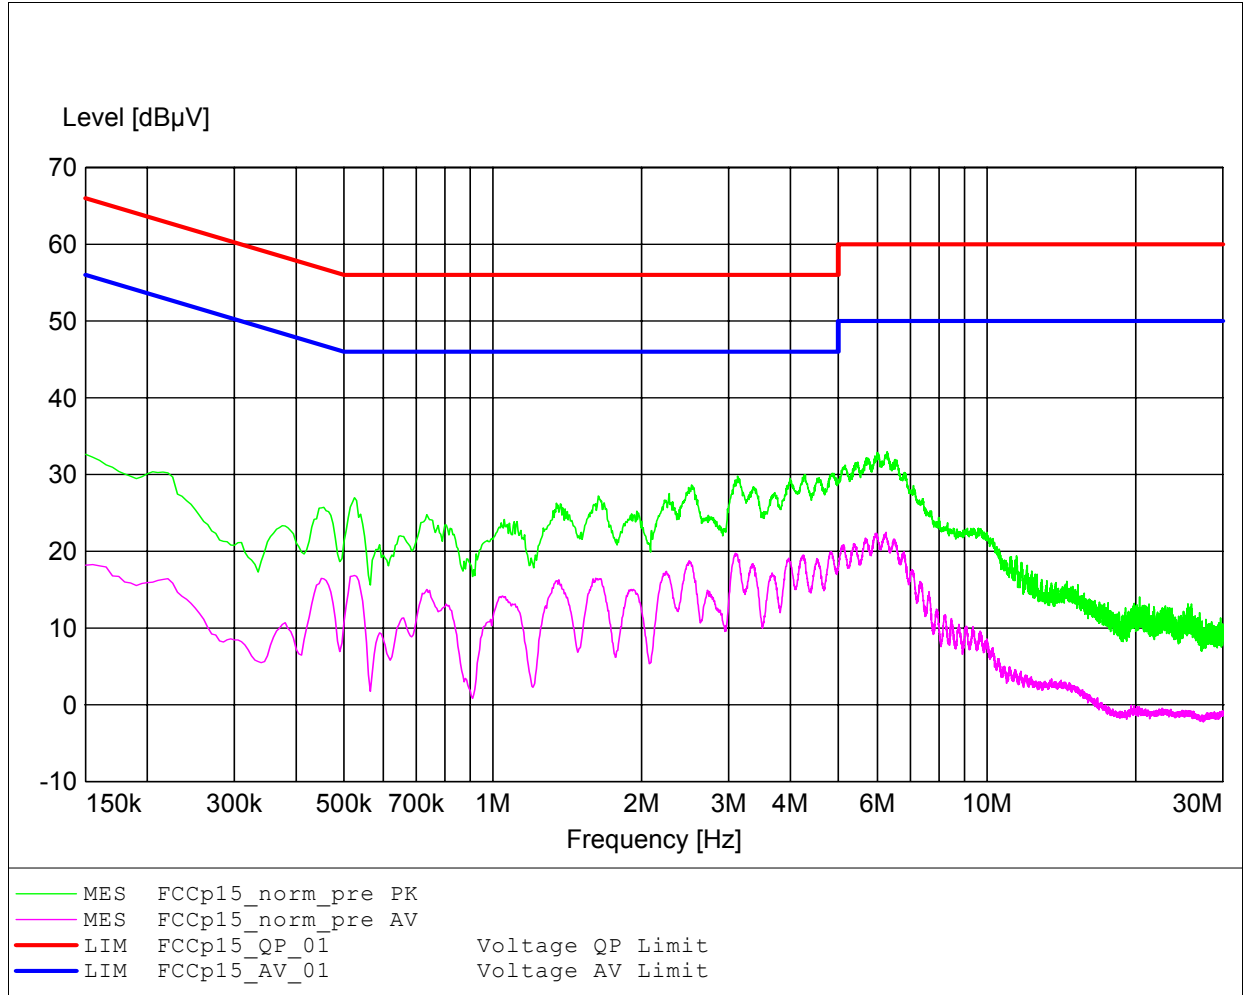

MEASUREMENT RESULT: "FCCp15_fin QP"

04.02.2008 08:29


| Frequency MHz | Level dBµV | Transd dB | Limit dBµV | Margin dB | Line | PE |
|------------------|---------------|--------------|---------------|--------------|------|-----|
| 0.230000 | 54.90 | 10.0 | 62 | 7.6 | --- | --- |

Annex J

Receiver radiated emissions


**Field Strength under normal conditions
Standards Industry Canada, RSS-GEN**

Approval Holder: GN NETCOM A/S
EUT: BLUETOOTH HEADSET / Frequency: 2441 MHz
Model: MOTOROLA H15
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Schlaps
Test Conditions: 23°C / Unom.: 3.70 V DC (BATTERY)
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:30.000MHz Emax:38.84dBµV/m RBW: 100 kHz

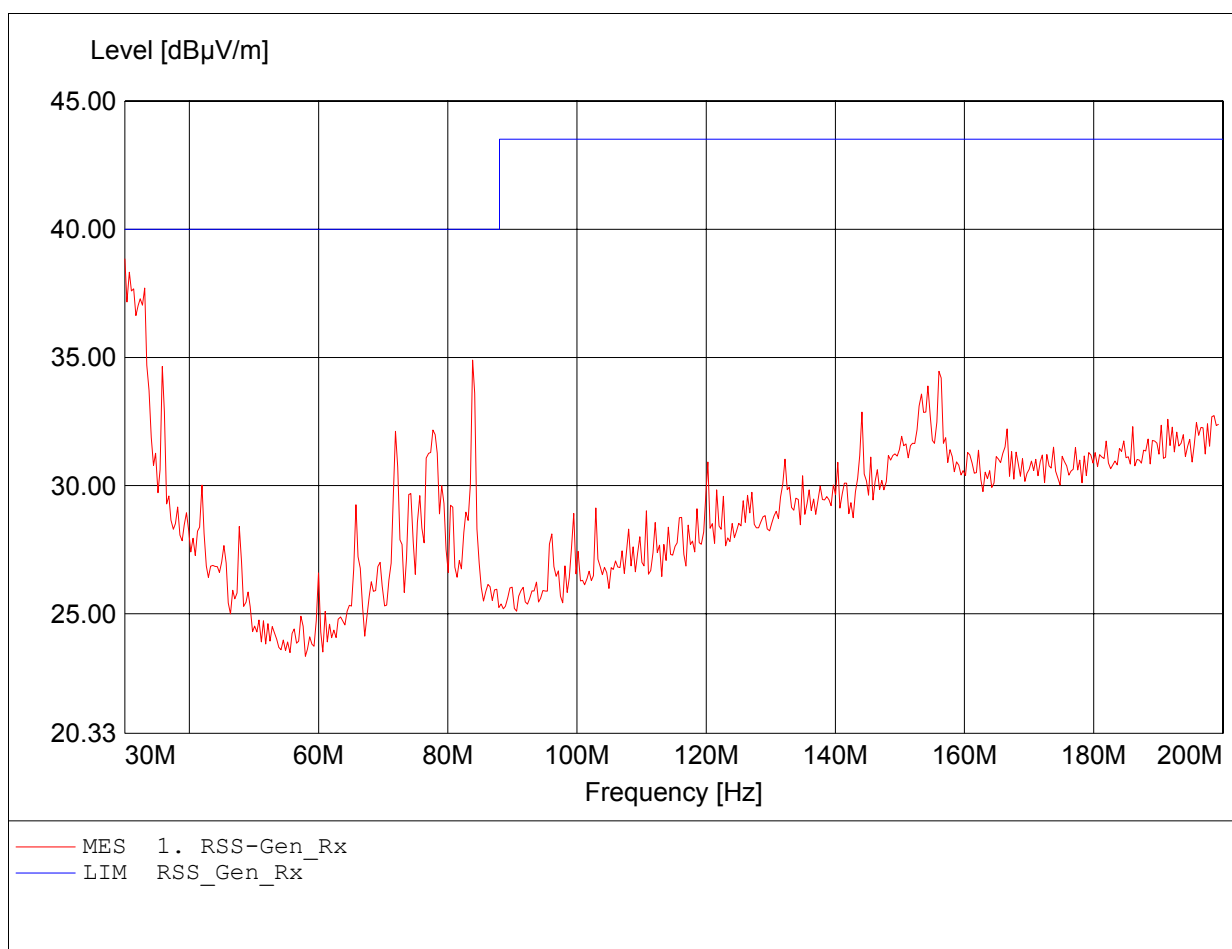


**Field Strength under normal conditions
Standards Industry Canada, RSS-GEN**

Approval Holder: GN NETCOM A/S
EUT: BLUETOOTH HEADSET / Frequency: 2441 MHz
Model: MOTOROLA H15
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Schlaps
Test Conditions: 23°C / Unom.: 3.70 V DC (BATTERY)
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:198.637MHz Emax:32.66dBµV/m RBW: 100 kHz

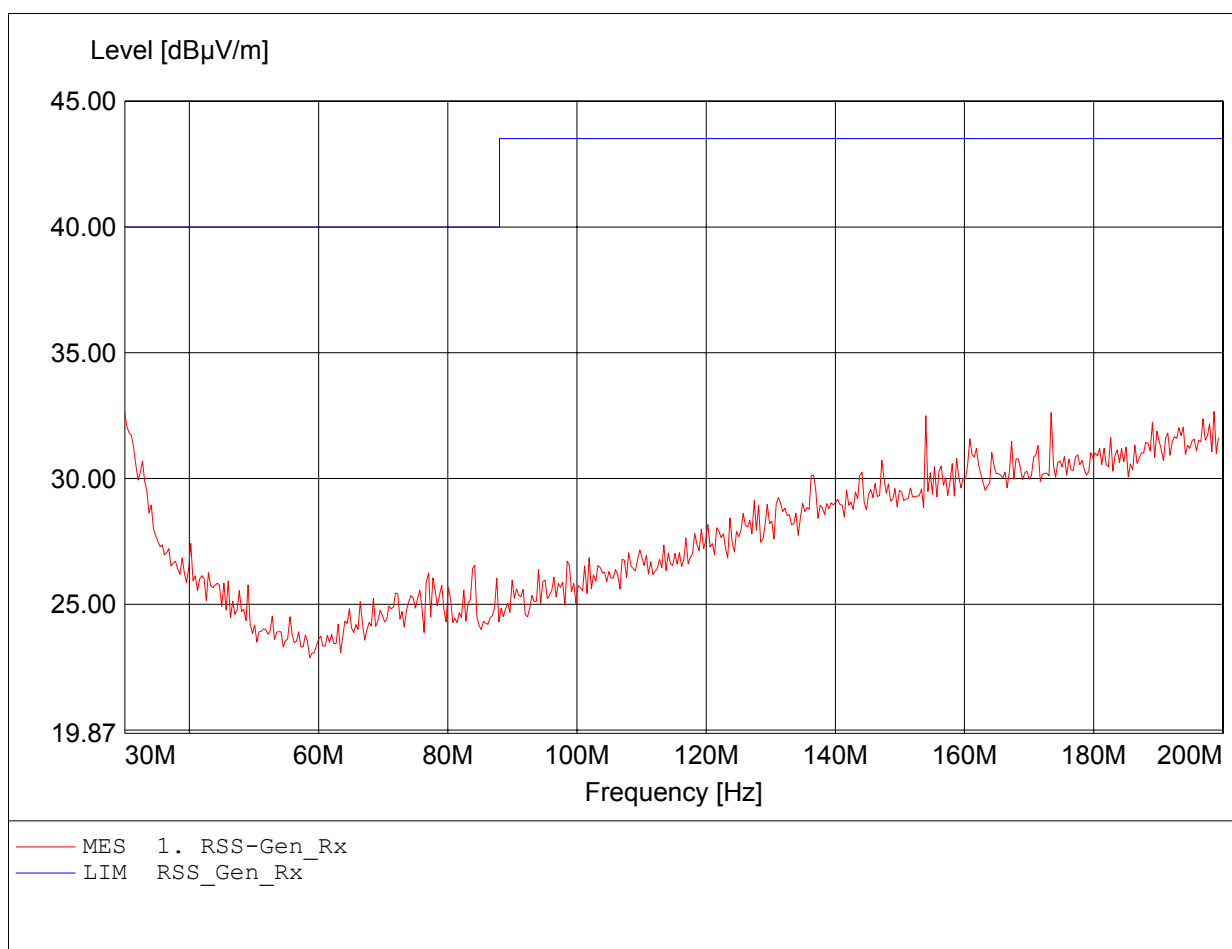


**Field Strength under normal conditions
Standards Industry Canada, RSS-GEN**

Approval Holder: GN NETCOM A/S
EUT: BLUETOOTH HEADSET / Frequency: 2441 MHz
Model: MOTOROLA H15
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Schlaps
Test Conditions: 23°C / Unom.: 3.70 V DC (BATTERY)
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq:560.721MHz Emax:35.75dBµV/m RBW: 100 kHz

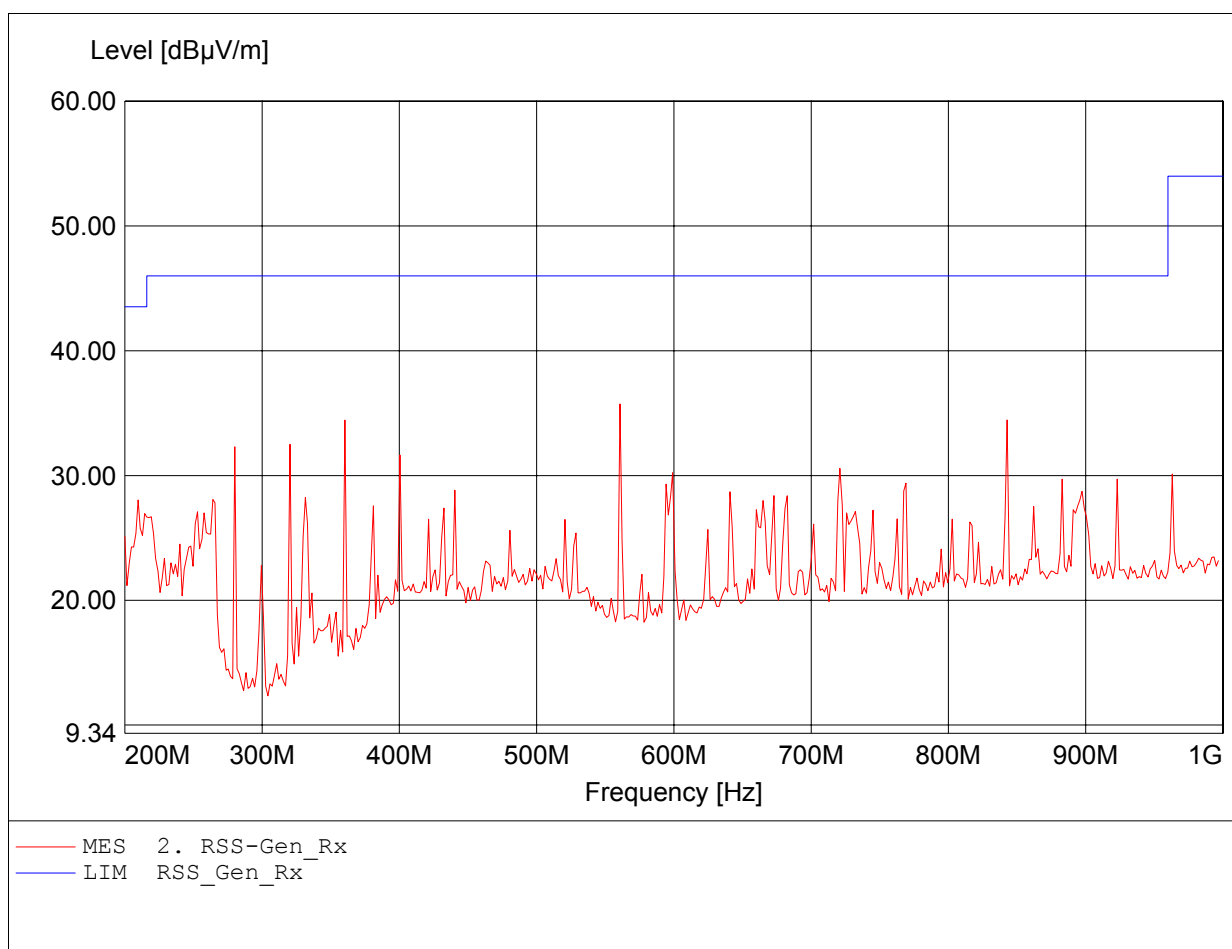


**Field Strength under normal conditions
Standards Industry Canada, RSS-GEN**

Approval Holder: GN NETCOM A/S
EUT: BLUETOOTH HEADSET / Frequency: 2441 MHz
Model: MOTOROLA H15
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Schlaps
Test Conditions: 23°C / Unom.: 3.70 V DC (BATTERY)
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq:842.886MHz Emax:32.87dBµV/m RBW: 100 kHz

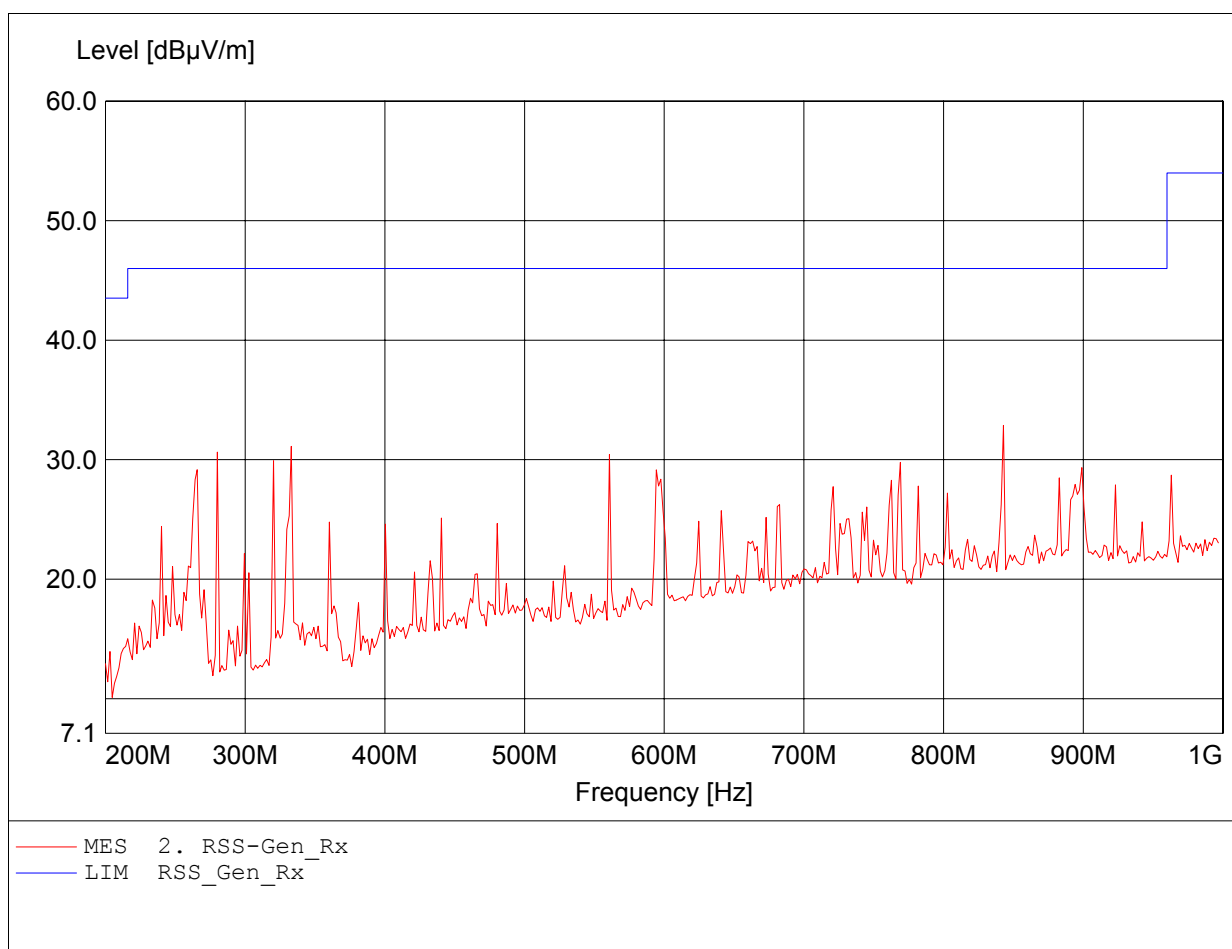


Field Strength under normal conditions
Standards Industry Canada, RSS-GEN

Approval Holder: GN NETCOM A/S
EUT: BLUETOOTH HEADSET / Frequency: 2441 MHz
Model: MOTOROLA H15
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Schlaps
Test Conditions: 23°C / Unom.: 3.70 V DC (BATTERY)
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HL025, ampl.
Comment 2: Freq:3.772GHz Emax:42.34dBμV/m RBW: 1 MHz

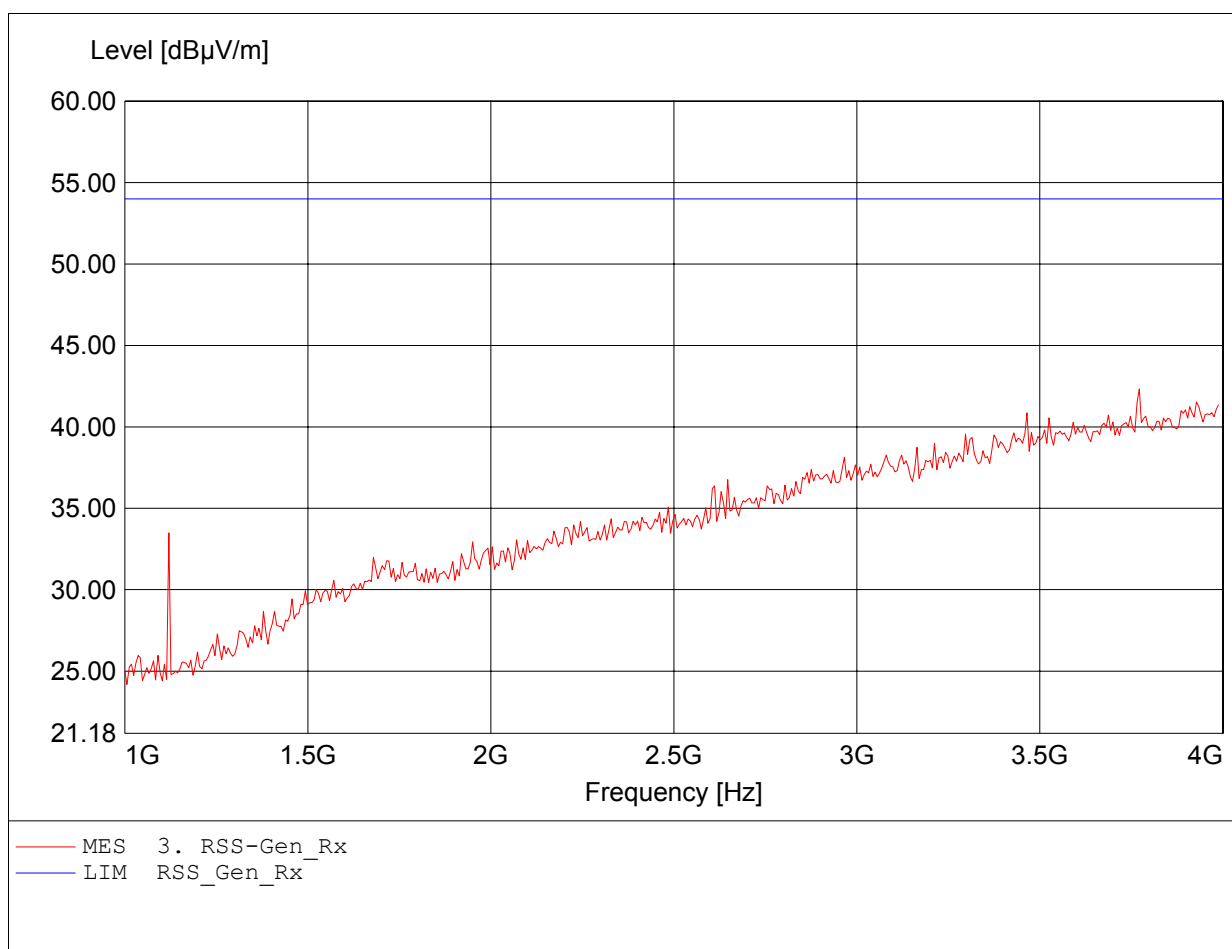


**Field Strength under normal conditions
Standards Industry Canada, RSS-GEN**

Approval Holder: GN NETCOM A/S
EUT: BLUETOOTH HEADSET / Frequency: 2441 MHz
Model: MOTOROLA H15
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Schlaps
Test Conditions: 23°C / Unom.: 3.70 V DC (BATTERY)
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HL025, ampl.
Comment 2: Freq:3.904GHz Emax:41.74dBμV/m RBW: 1 MHz

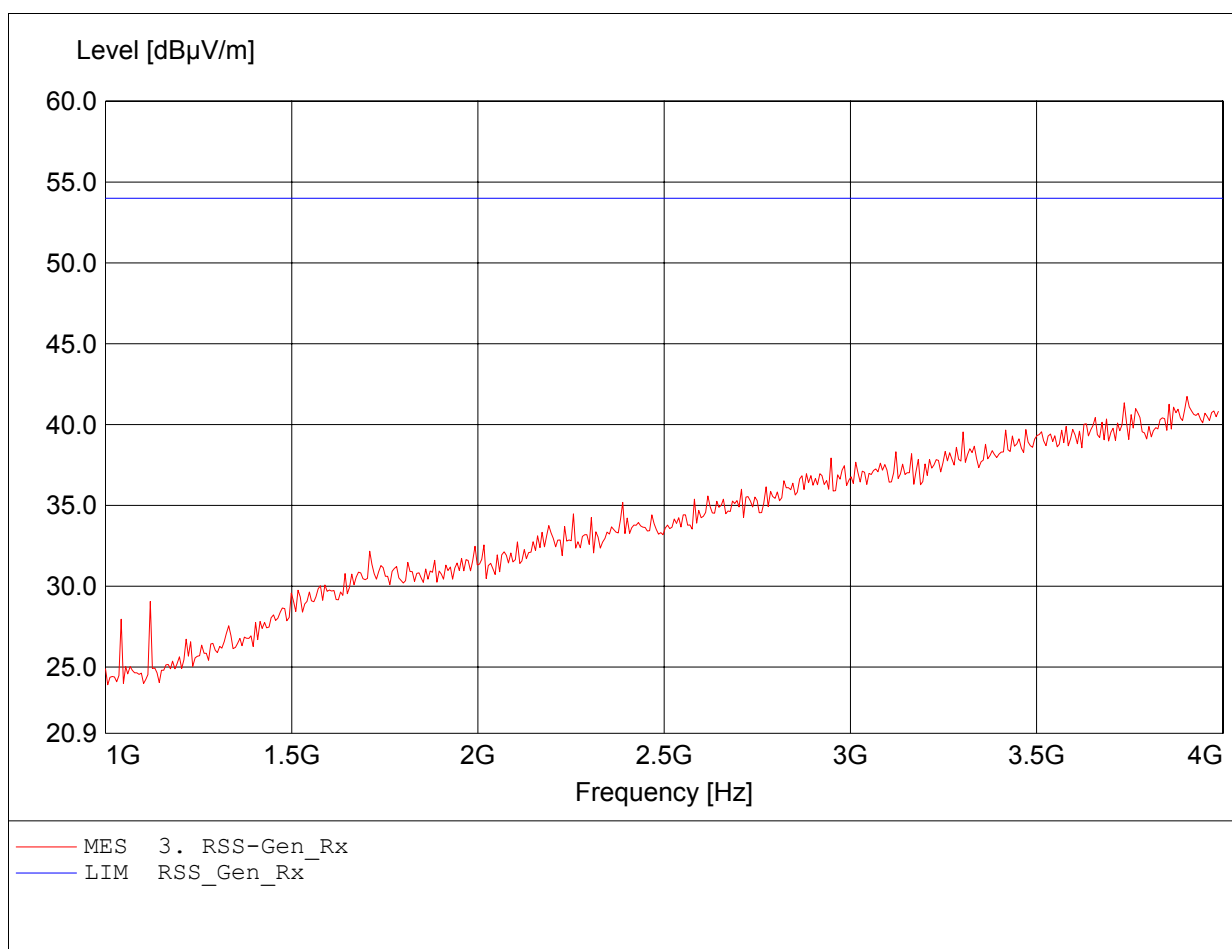


**Field Strength under normal conditions
Standards Industry Canada, RSS-GEN**

Approval Holder: GN NETCOM A/S
EUT: BLUETOOTH HEADSET / Frequency: 2441 MHz
Model: MOTOROLA H15
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Schlaps
Test Conditions: 23°C / Unom.: 3.70 V DC (BATTERY)
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HL025, ampl.
Comment 2: Freq:7.768GHz Emax:42.84dBµV/m RBW: 1 MHz

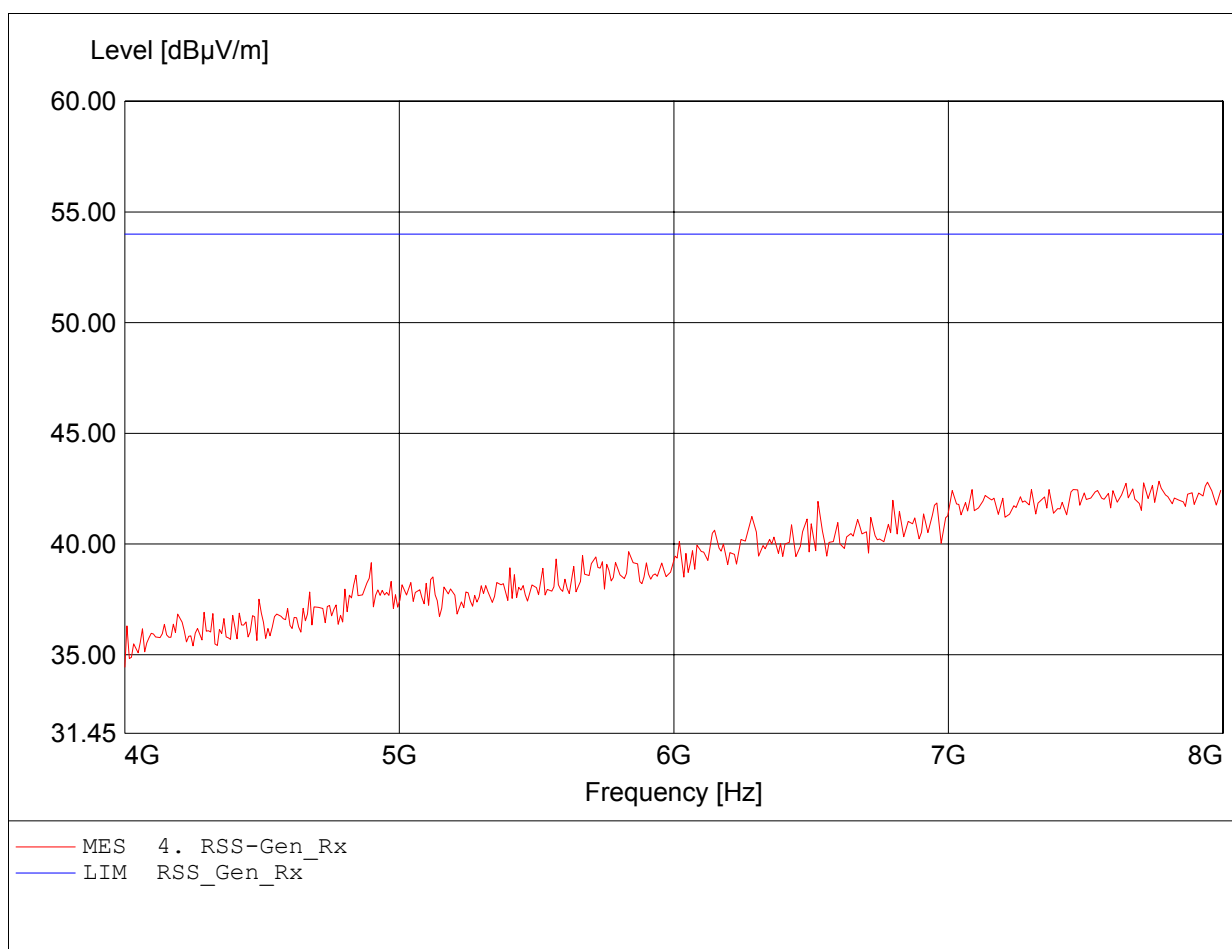


**Field Strength under normal conditions
Standards Industry Canada, RSS-GEN**

Approval Holder: GN NETCOM A/S
EUT: BLUETOOTH HEADSET / Frequency: 2441 MHz
Model: MOTOROLA H15
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Schlaps
Test Conditions: 23°C / Unom.: 3.70 V DC (BATTERY)
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HL025, ampl.
Comment 2: Freq:7.856GHz Emax:43.04dBµV/m RBW: 1 MHz

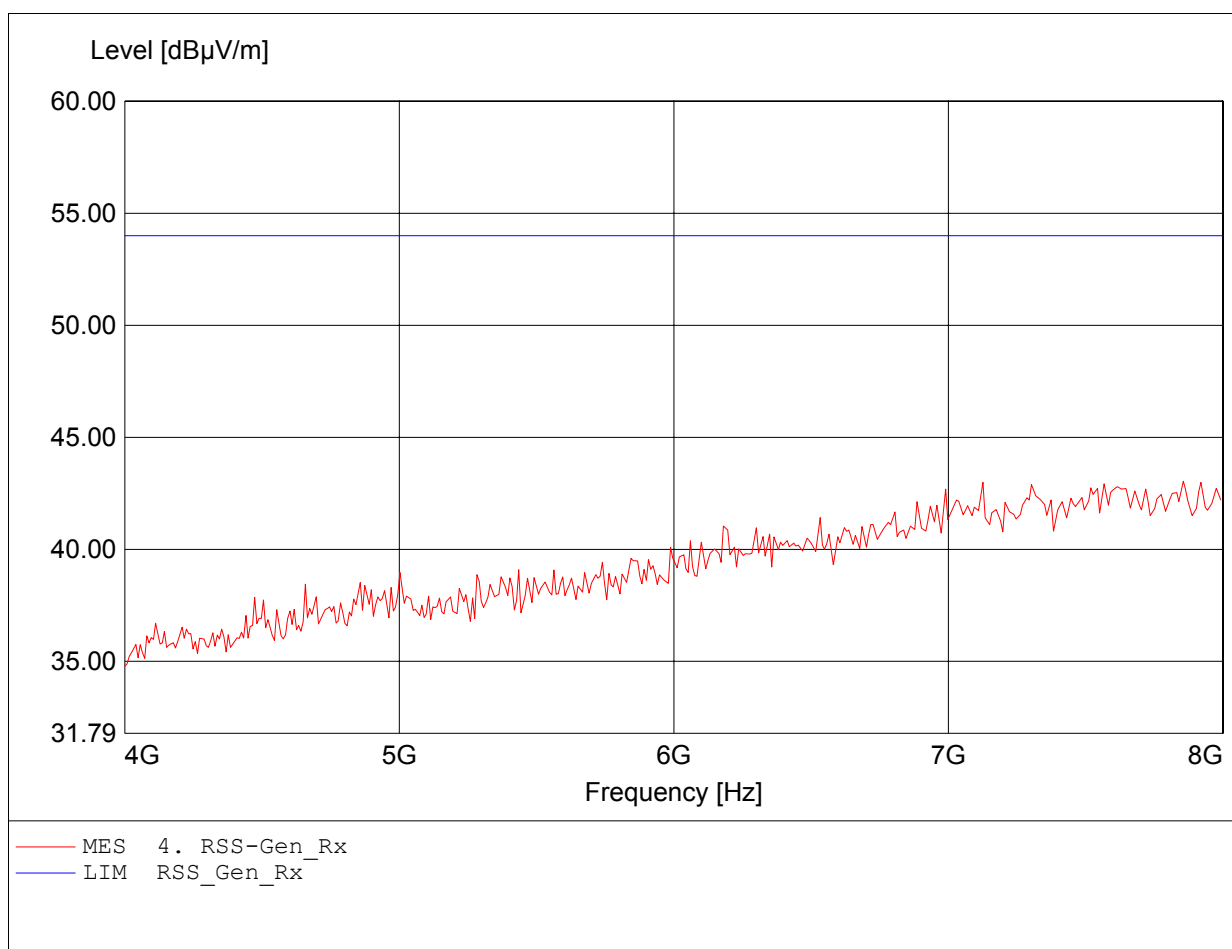

**Field Strength under normal conditions
Standards Industry Canada, RSS-GEN**

Approval Holder: GN NETCOM A/S
EUT: BLUETOOTH HEADSET / Frequency: 2441 MHz
Model: MOTOROLA H15
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Schlaps
Test Conditions: 23°C / Unom.: 3.70 V DC (BATTERY)
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HL025, ampl.
Comment 2: Freq:11.695GHz Emax:47.67dBμV/m RBW: 1 MHz

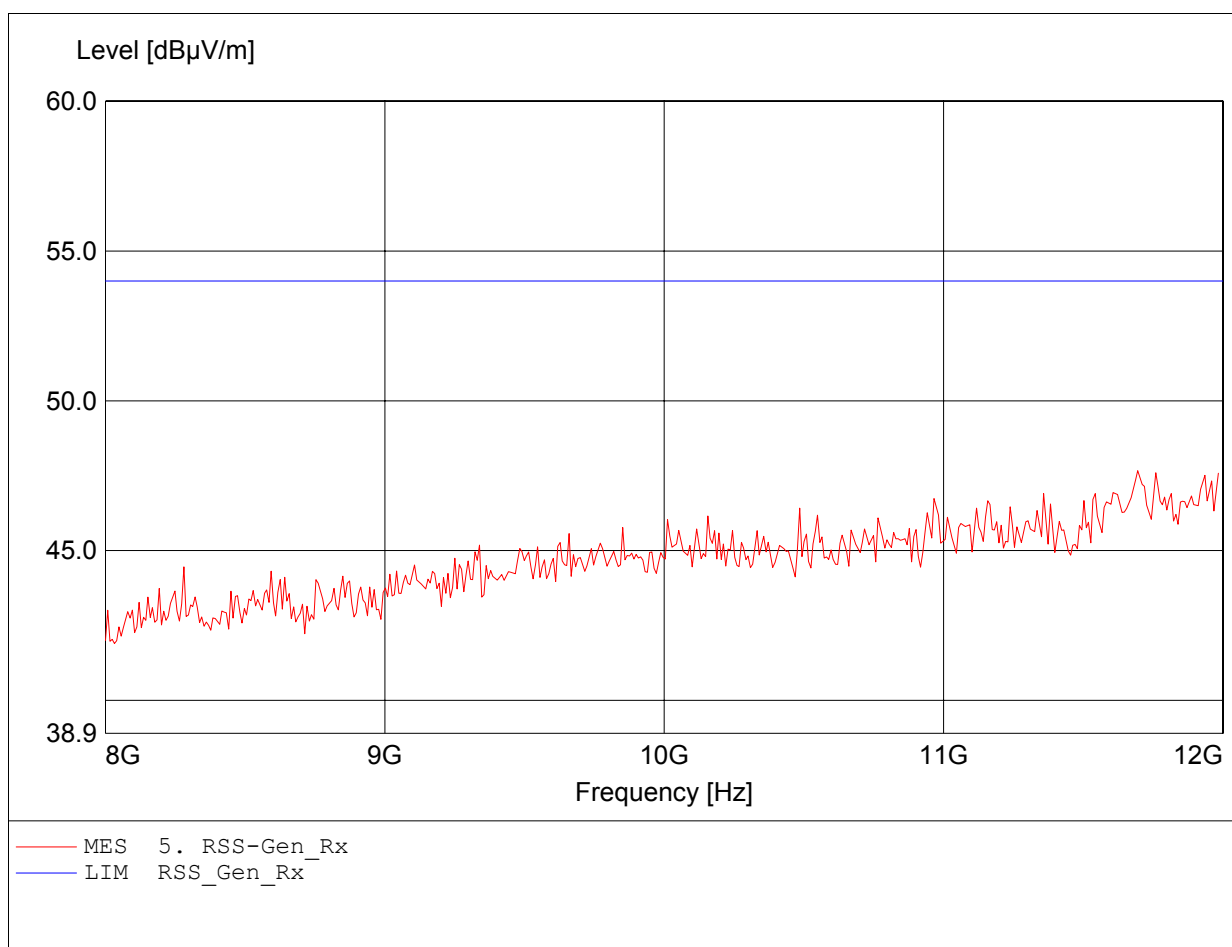

**Field Strength under normal conditions
Standards Industry Canada, RSS-GEN**

Approval Holder: GN NETCOM A/S
EUT: BLUETOOTH HEADSET / Frequency: 2441 MHz
Model: MOTOROLA H15
Test Site / Operator: Eurofins ETS Product Service GmbH / Mr. Schlaps
Test Conditions: 23°C / Unom.: 3.70 V DC (BATTERY)
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HL025, ampl.
Comment 2: Freq:11.848GHz Emax:47.52dBµV/m RBW: 1 MHz

