



<b>FCC TEST REPORT</b> <b>FCC 47 CFR Part 15C</b> <b>Industry Canada RSS-210</b> <b>Frequency hopping systems operating within the 2400 – 2483.5 MHz band</b>	
<b>Report Reference No.</b> .....	G0M-1308-3134-TFC247B-V01
<b>Testing Laboratory</b> .....	Eurofins Product Service GmbH
<b>Address</b> .....	Storkower Str. 38c 15526 Reichenwalde Germany
<b>Accreditation</b> .....	<div style="text-align: center;">   </div> <p>A2LA Accredited Testing Laboratory, Certificate No.: 1983.01                      FCC Filed Test Laboratory, Reg.-No.: 96970                      IC OATS Filing assigned code: 3470A</p>
<b>Applicant's name</b> .....	GN Netcom A/S
<b>Address</b> .....	Lautrupbjerg 7 2750 Ballerup DENMARK
<b>Test specification:</b>	
<b>Standard</b> .....	47 CFR Part 15C RSS-210, Issue 8, 2010-12 RSS-Gen, Issue 3, 2010-12 ANSI C63.4:2009
<b>Equipment under test (EUT):</b>	
Product description	Bluetooth Speakerphone
Model No.	HFS210
Hardware version	4
Firmware / Software version	010
	FCC-ID: BCE-HFS210                      IC: 2386C-HFS210
<b>Test result</b>	<b>Passed</b>

**Possible test case verdicts:**


- neither assessed nor tested .....: N/N
- required by standard but not appl. to test object.....: N/A
- required by standard but not tested.....: N/T
- not required by standard for the test object .....: N/R
- test object does meet the requirement.....: P (Pass)
- test object does not meet the requirement.....: F (Fail)


**Testing:**

Date of receipt of test item .....: 2013-08-19

Date (s) of performance of tests .....: 2013-08-26 – 2013-09-10

Compiled by .....: Antje Bartusch

Tested by (+ signature).....: Wilfried Treffke   
 (Testing Manager) .....

Approved by (+ signature) .....: Jens Zimmermann   
 (Test Lab Manager) .....

Date of issue .....: 2013-10-09

Total number of pages.....: 125

**General remarks:**

**The test results presented in this report relate only to the object tested.**  
**The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.**

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

**Additional comments:**

---

---

## Version History

Version	Issue Date	Remarks	Revised by
01	2013-10-09	Initial Release	

---


## REPORT INDEX

<b>1</b>	<b>EQUIPMENT (TEST ITEM) DESCRIPTION:</b>	<b>5</b>
1.1	Photos – Equipment External	6
1.2	Photos – Equipment internal	7
1.3	Photos – Test setup	8
1.4	Supporting Equipment Used During Testing	9
1.5	Test Modes	10
1.6	Test Equipment Used During Testing	12
1.7	Sample emission level calculation	13
<b>2</b>	<b>RESULT SUMMARY</b>	<b>14</b>
<b>3</b>	<b>TEST CONDITIONS AND RESULTS</b>	<b>15</b>
3.1	Test Conditions and Results – Occupied Bandwidth	15
3.2	Test Conditions and Results – 20 dB Bandwidth	22
3.3	Test Conditions and Results – Number of hopping frequencies	32
3.4	Test Conditions and Results – Frequency hopping channel separation	36
3.5	Test Conditions and Results – Time of occupancy (Dwell Time)	38
3.6	Test Conditions and Results – Maximum peak conducted power	40
3.7	Test Conditions and Results – AC power line conducted emissions	42
3.8	Test Conditions and Results – Band edge compliance	45
3.9	Test Conditions and Results – Conducted spurious emissions	59
3.10	Test Conditions and Results – Transmitter radiated emissions	66
3.11	Test Conditions and Results – Receiver radiated emissions	68
	Transmitter radiated spurious emissions	70
ANNEX A	Receiver radiated spurious emissions	118






**1 Equipment (Test item) Description:**

<b>Description</b>	Bluetooth Speakerphone	
<b>Model</b>	HFS210	
<b>Serial number</b>	None	
<b>Hardware version</b>	4	
<b>Software / Firmware version</b>	010	
<b>FCC-ID</b>	BCE-HFS210	
<b>IC</b>	2386C-HFS210	
<b>Equipment type</b>	End product	
<b>Radio type</b>	Transceiver	
<b>Radio technology</b>	Bluetooth	
<b>Operating frequency range</b>	2402 - 2480 MHz	
<b>Assigned frequency band</b>	2400 - 2483.5 MHz	
<b>Main test frequencies</b>	F <sub>LOW</sub>	2402 MHz
	F <sub>MID</sub>	2441 MHz
	F <sub>HIGH</sub>	2480 MHz
<b>Spreading</b>	FHSS	
<b>Modulations</b>	GFSK, PI/4-DQPSK, 8-PSK	
<b>Number of channels</b>	79 hopping channels at all	
<b>Channel spacing</b>	1 MHz	
<b>Number of antennas</b>	1	
<b>Antenna</b>	Type	integrated
	Model	Patch Antenna
	Manufacturer	unspecified
	Gain	2.5 dBi
<b>Manufacturer</b>	GN Netcom A/S Lautrupbjerg 7 2750 Ballerup DENMARK	
<b>Power supply</b>	V <sub>NOM</sub>	3.7 VDC
	V <sub>MIN</sub>	3.2 VDC
	V <sub>MIN</sub>	4.2 VDC
<b>AC/DC-Adaptor</b>	Model	None
	Vendor	None
	Input	None
	Output	None



1.1 Photos – Equipment External

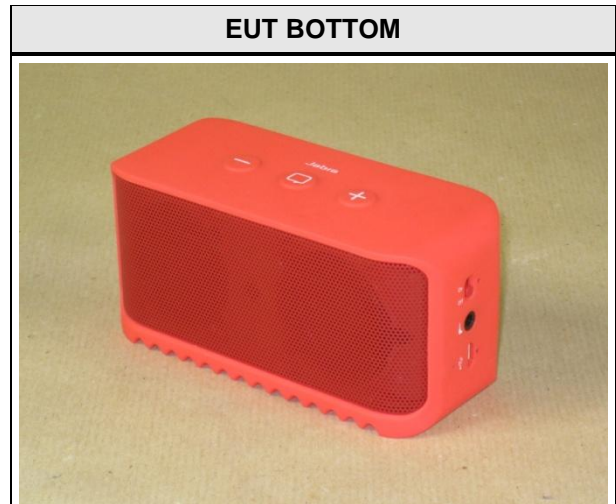

1.2 Photos – Equipment internal

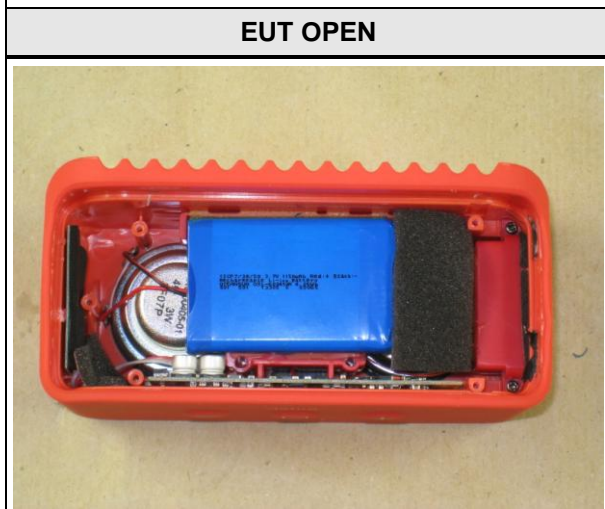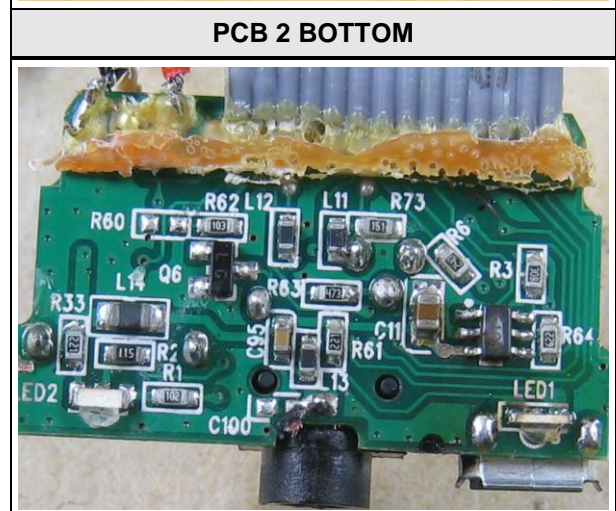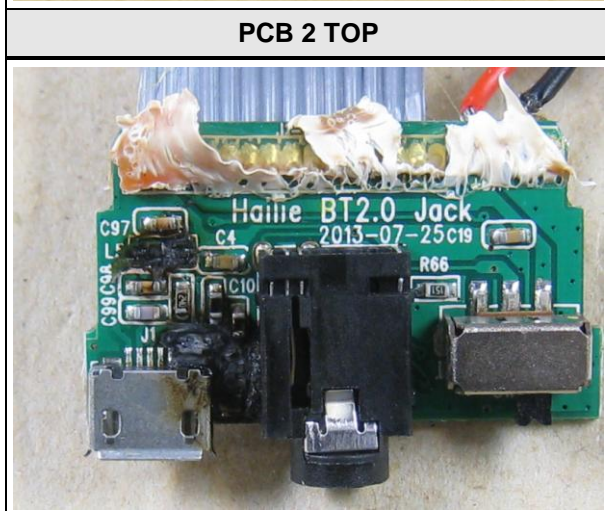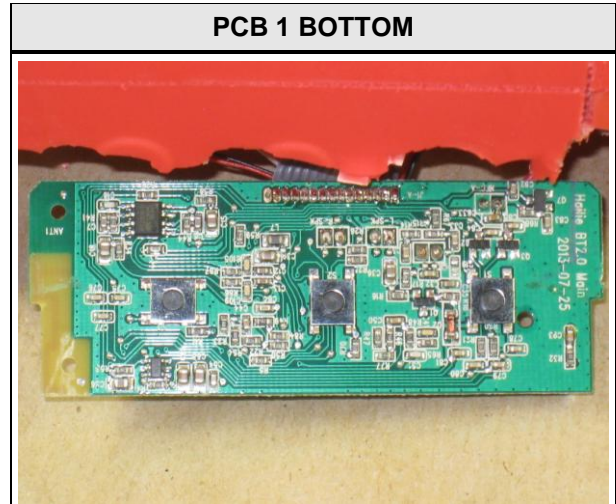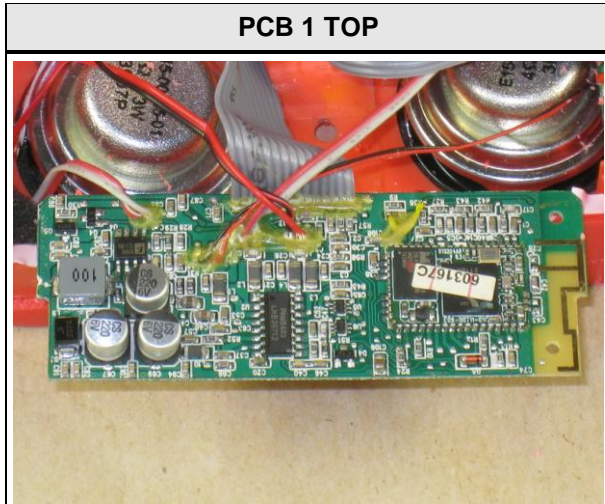

1.3 Photos – Test setup

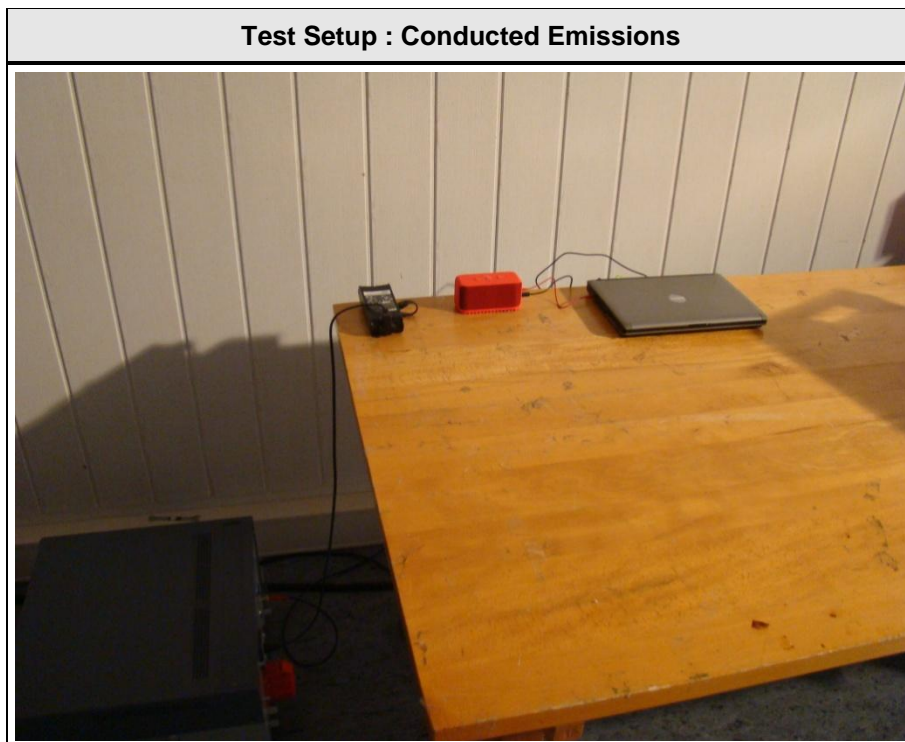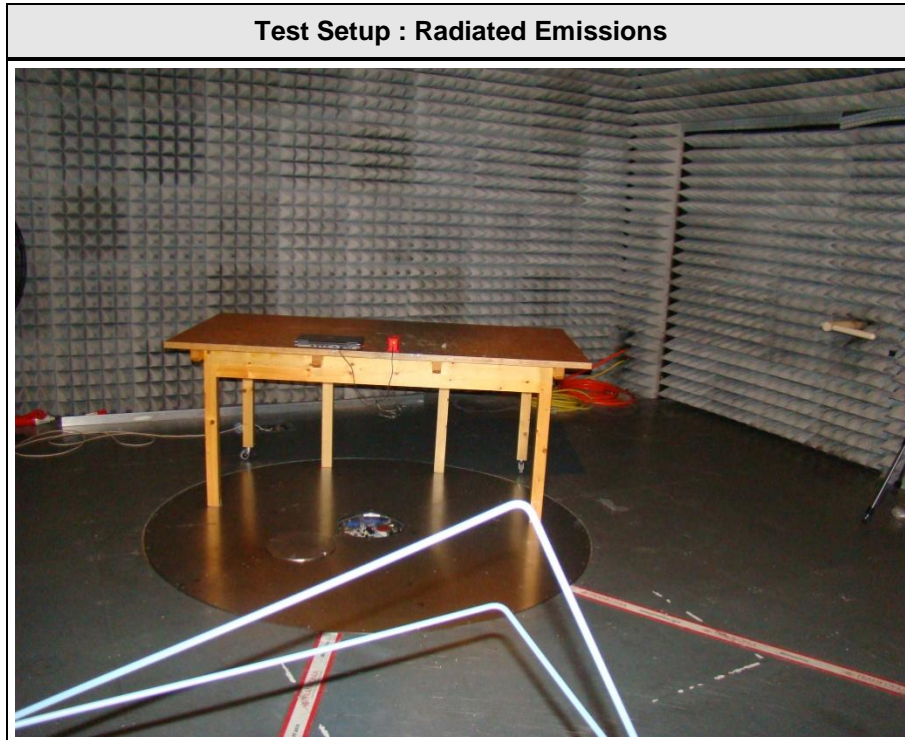



#### 1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments
AE	Laptop	DELL	Latitude D430	
AE	Mobile phone	Nokia	6310	

**\*Note:** Use the following abbreviations:

AE : Auxiliary/Associated Equipment, or

SIM : Simulator (Not Subjected to Test)

CABL : Connecting cables

**1.5 Test Modes**

Mode #	Description	
DH5-Sngl	General conditions:	EUT powered and controlled via fully charged battery
	Radio conditions:	Mode = standalone transmit Spreading = Hopping stopped (single hopping channel) Modulation = GFSK Packet type = DH5 Data rate = 1 Mbps Duty cycle = 49 % Power level = Maximum
2DH5-Sngl	General conditions:	EUT powered and controlled via fully charged battery
	Radio conditions:	Mode = standalone transmit Spreading = Hopping stopped (single hopping channel) Modulation = $\pi/4$ -DQPSK Packet type = 2DH5 Data rate = 2 Mbps Duty cycle = 49 % Power level = Maximum
3DH5-Sngl	General conditions:	EUT powered and controlled via fully charged battery
	Radio conditions:	Mode = standalone transmit Spreading = Hopping stopped (single hopping channel) Modulation = 8-DPSK Packet type = 3DH5 Data rate = 3 Mbps Duty cycle = 49 % Power level = Maximum
DH5-Hop	General conditions:	EUT powered and controlled via fully charged battery
	Radio conditions:	Mode = standalone transmit Spreading = Hopping Modulation = GFSK Packet type = DH5 Data rate = 1 Mbps Duty cycle = 49 % Power level = Maximum

2DH5-Hop	General conditions:	EUT powered and controlled via fully charged battery
	Radio conditions:	Mode = standalone transmit Spreading = Hopping Modulation = $\pi/4$ -DQPSK Packet type = 2DH5 Data rate = 2 Mbps Duty cycle = 49 % Power level = Maximum
3DH5-Hop	General conditions:	EUT powered and controlled via fully charged battery
	Radio conditions:	Mode = standalone transmit Spreading = Hopping Modulation = 8-DPSK Packet type = 3DH5 Data rate = 3 Mbps Duty cycle = 49 % Power level = Maximum
Receive	General conditions:	EUT powered and controlled via fully charged battery
	Radio conditions:	Mode = standalone receive Spreading = Hopping
AC-Powerline	General conditions:	EUT connected and powered by Notebook USB port
	Radio conditions:	Mode = standalone transmit Spreading = Hopping Power level = Maximum

**1.6 Test Equipment Used During Testing**

20dB Bandwidth					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSP 30	EF00312	2013-01	2014-01

Number of hopping frequencies					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSP 30	EF00312	2013-01	2014-01

Time of occupancy					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSP 30	EF00312	2013-01	2014-01

Maximum peak conducted power					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSP 30	EF00312	2013-01	2014-01

Band edge compliance					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSP 30	EF00312	2013-01	2014-01

Conducted spurious emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSP 30	EF00312	2013-01	2014-01

Radiated spurious emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Semi-anechoic chamber	Frankonia	AC 5	EF00395	calibration	calibration
Spectrum Analyzer	R&S	FSIQ26	EF00242	2013-06	2014-06
Biconical Antenna	R&S	HK 116	EF00012	2013-02	2016-02
LPD Antenna	R&S	HL 223	EF00187	2011-02	2014-02
LPD Antenna	R&S	HL 025	EF00327	2013-02	2016-02

AC powerline conducted emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
AMN	R&S	ESH2-Z5	EF00182	2012-10	2014-10
AMN	R&S	ESH3-Z5	EF00036	2012-11	2014-11
EMI Test Receiver	R&S	ESCS 30	EF00295	2012-09	2013-09

---

 Test Report No.: G0M-1308-3134-TFC247B-V01
 

---

 Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

## 1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dB $\mu$ V. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dB $\mu$ V/m). The FCC limits are given in units of  $\mu$ V/m. The following formula is used to convert the units of  $\mu$ V/m to dB $\mu$ V/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 * \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:


$$\begin{array}{rclcl} \text{Reading} & + & \text{AF} & = & \text{Net Reading} & : & \text{Net reading - FCC limit} & = & \text{Margin} \\ 21.5 \text{ dB}\mu\text{V} & + & 26 \text{ dB} & = & 47.5 \text{ dB}\mu\text{V/m} & : & 47.5 \text{ dB}\mu\text{V/m} - 57.0 \text{ dB}\mu\text{V/m} & = & -9.5 \text{ dB} \end{array}$$

## 2 Result Summary

FCC 47 CFR Part 15C, IC RSS-210				
Product Specific Standard Section	Requirement – Test	Reference Method	Result	Remarks
RSS-Gen 4.6.1	Occupied Bandwidth	RSS-Gen 4.6.1	N/R	Informational only
FCC § 15.247(a)(1) IC RSS-210 § A8.1	20 dB Bandwidth	Public notice DA 00-705	PASS	
FCC § 15.247(a)(1)(iii) IC RSS-210 § A8.1	Number of hopping frequencies	Public notice DA 00-705	PASS	
FCC § 15.247(a)(1) IC RSS-210 § A8.1	Frequency hopping channel separation	Public notice DA 00-705	PASS	
FCC § 15.247(a)(1)(iii) IC RSS-210 § A8.1	Time of occupancy (Dwell time)	Public notice DA 00-705	PASS	
FCC § 15.247(b)(1) IC RSS-210 § A8.4	Maximum peak conducted power	Public notice DA 00-705	PASS	
47 CFR 15.207 RSS-Gen 7.2.4	AC power line conducted emissions	ANSI C63.4	PASS	
FCC § 15.247(d) IC RSS-210 § A8.5	Band edge compliance	Public notice DA 00-705	PASS	
FCC § 15.247(d) IC RSS-210 § A8.5	Conducted spurious emissions	Public notice DA 00-705	PASS	
FCC § 15.247(d) FCC § 15.209 IC RSS-210 A8.5 IC RSS-Gen 4.9 IC RSS-Gen 7.2.5	Transmitter radiated spurious emissions	Public notice DA 00-705 / ANSI C 63.4	PASS	
IC RSS-Gen 4.10 IC RSS-Gen 6.1	Receiver radiated spurious emissions	ANSI C 63.4	PASS	
<b>Remarks:</b>				


### 3 Test Conditions and Results

#### 3.1 Test Conditions and Results – Occupied Bandwidth

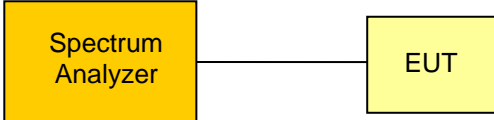Occupied Bandwidth acc. IC RSS-Gen		Verdict: PASS	
Test according to measurement reference	Reference Method		
	RSS-Gen 4.6.1		
Test frequency range	Tested frequencies		
	$F_{LOW} / F_{MID} / F_{HIGH}$		
<b>Limits</b>			
None (Informational only)			
<b>Test setup</b>			
 <pre> graph LR     SA[Spectrum Analyzer] --- EUT[EUT]             </pre>			
<b>Test procedure</b>			
<ol style="list-style-type: none"> <li>1. EUT set to test mode (Communication tester is used if needed)</li> <li>2. Span set to at least twice the emission spectrum</li> <li>3. Resolution bandwidth set to 1 % of span</li> <li>4. Occupied Bandwidth (99 %) measurement with spectrum analyzer built in measurement function</li> </ol>			
<b>Test results</b>			
Channel	Frequency [MHz]	Mode	Occupied Bandwidth [kHz]
$F_{LOW}$	2402	DH5-Sngl	854
$F_{MID}$	2441	DH5-Sngl	854
$F_{HIGH}$	2480	DH5-Sngl	868
$F_{LOW}$	2402	3DH5-Sngl	1218
$F_{MID}$	2441	3DH5-Sngl	1204
$F_{HIGH}$	2480	3DH5-Sngl	1204
Comments:			

**Occupied Bandwidth – DH5-Sngl F<sub>Low</sub>**
**RSS Gen  
Occupied Bandwidth**

EUT	Bluetooth Speakerphone
Model	HFS210
Approval Holder	GN-Netcon A/S
Temperature / Voltage	tnom
Test Site / Operator	Eurofins / Mr. Treffke
Test Specification	4.4.1 Occupied Bandwidth
Comment 1	Channel.: 0 / 2402 MHz
Comment 2	A spectrum analyzer with an integrated 99% power bandwidth function is used
Comment 3	GFSK

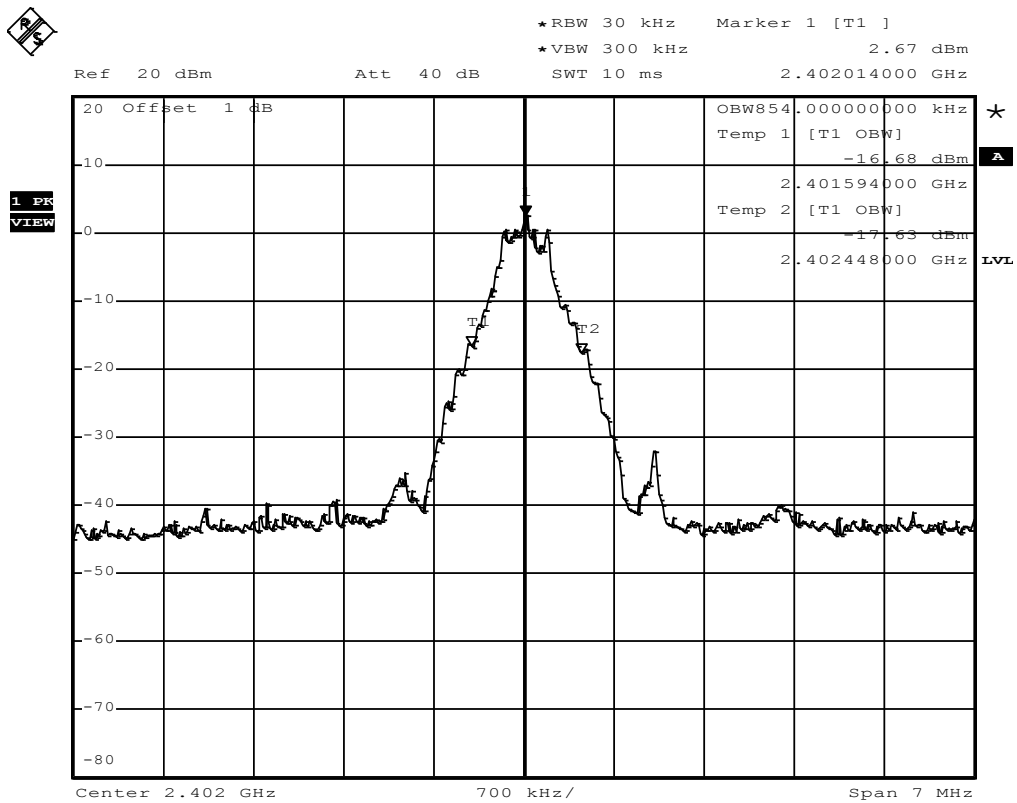


Comment: Occupied bandwidth: 854 KHz  
 Date: 27.AUG.2013 15:31:52




**Occupied Bandwidth – DH5-Sngl F<sub>MID</sub>**
**RSS Gen  
Occupied Bandwidth**

EUT	Bluetooth Speakerphone
Model	HFS210
Approval Holder	GN-Netcon A/S
Temperature / Voltage	tnom
Test Site / Operator	Eurofins / Mr. Treffke
Test Specification	4.4.1 Occupied Bandwidth
Comment 1	Channel.: 39/ 2441 MHz
Comment 2	A spectrum analyzer with an integrated 99% power bandwidth function is used
Comment 3	GFSK

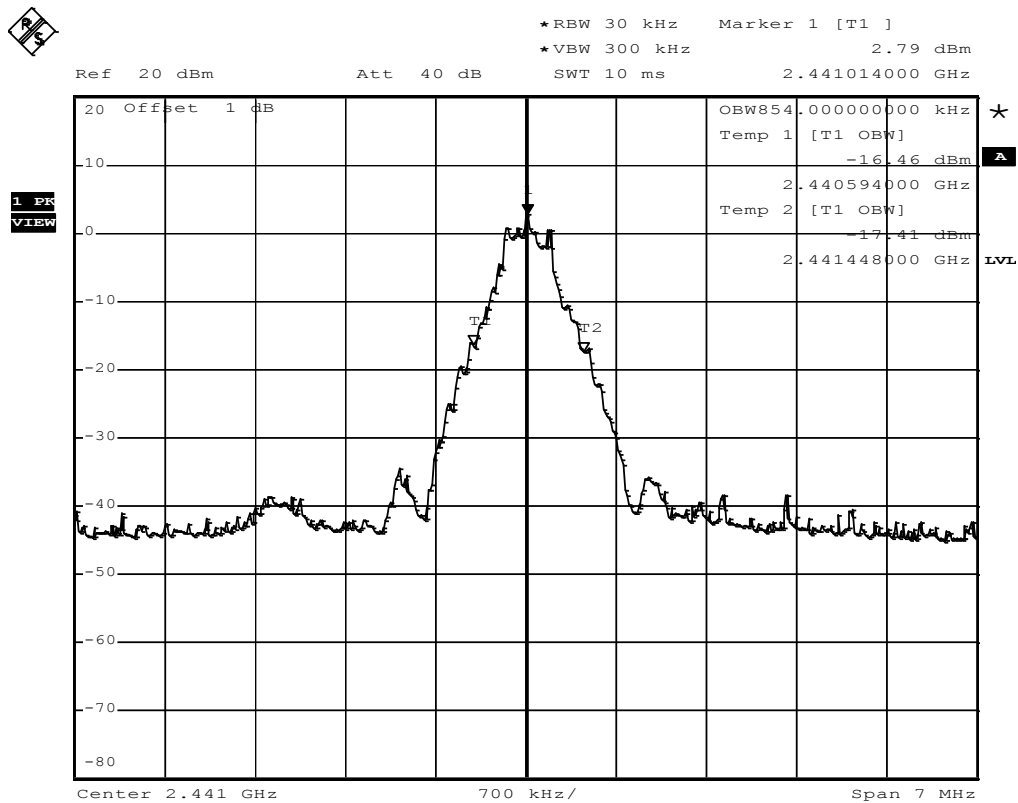

**Occupied Bandwidth – DH5-Sngl F<sub>HIGH</sub>**
**RSS Gen  
Occupied Bandwidth**

EUT	Bluetooth Speakerphone
Model	HFS210
Approval Holder	GN-Netcon A/S
Temperature / Voltage	tnom
Test Site / Operator	Eurofins / Mr. Treffke
Test Specification	4.4.1 Occupied Bandwidth
Comment 1	Channel.: 78/ 2480 MHz
Comment 2	A spectrum analyzer with an integrated 99% power bandwidth function is used
Comment 3	GFSK

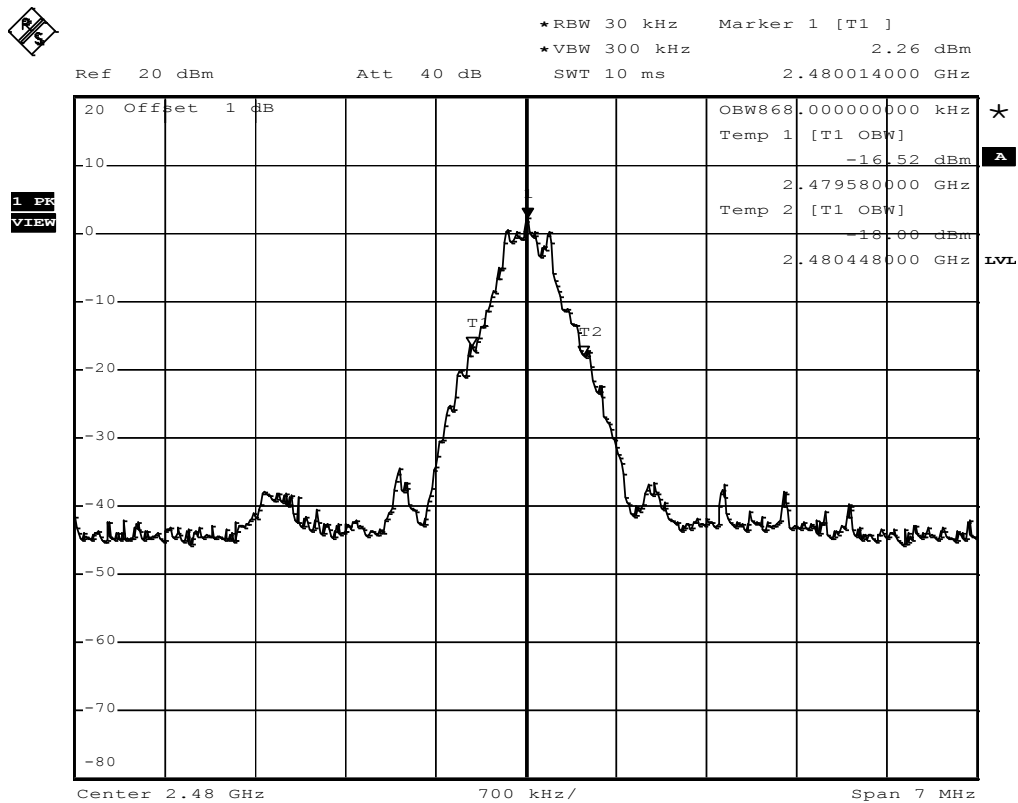


Comment: Occupied bandwidth: 868 KHz  
Date: 27.AUG.2013 15:40:17

Occupied Bandwidth – 3-DH5-Sngl F<sub>LOW</sub>

RSS Gen  
Occupied Bandwidth

EUT	Bluetooth Speakerphone
Model	HFS210
Approval Holder	GN-Netcon A/S
Temperature / Voltage	tnom
Test Site / Operator	Euofins / Mr. Treffke
Test Specification	4.4.1 Occupied Bandwidth
Comment 1	Channel.: 0 / 2402 MHz
Comment 2	A spectrum analyzer with an integrated 99% power bandwidth function is used
Comment 3	8DPSK

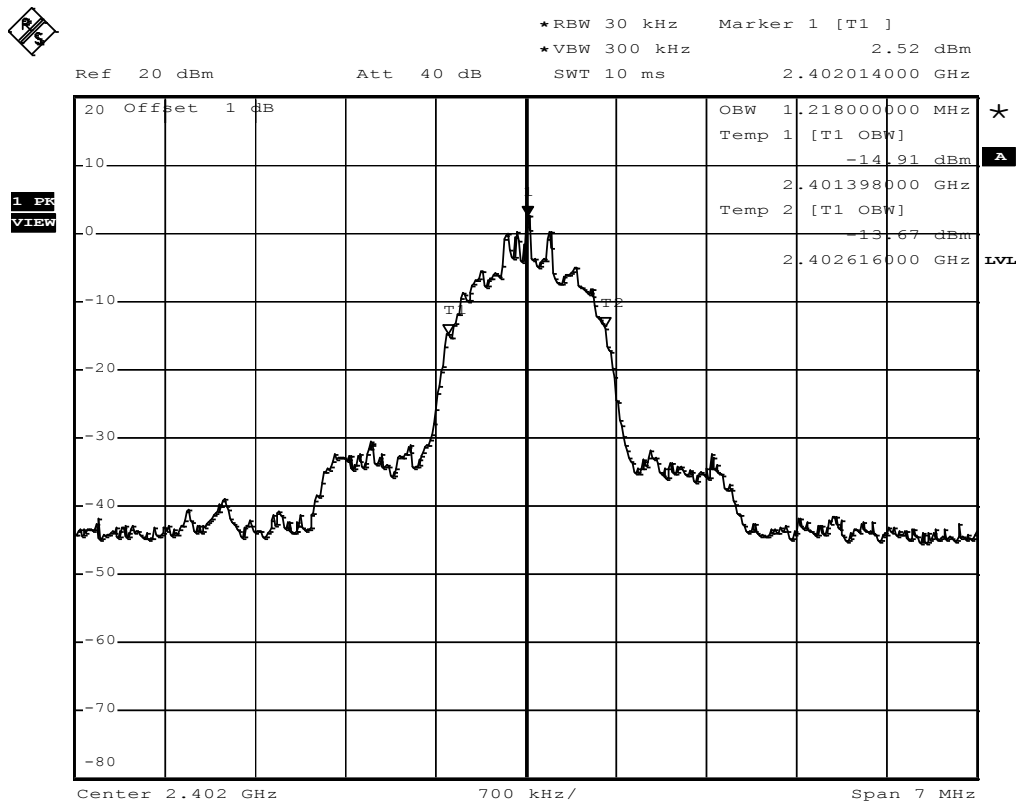


Comment: Occupied bandwidth: 1218 KHz  
Date: 27.AUG.2013 15:42:05

Occupied Bandwidth – 3-DH5-Sngl F<sub>MID</sub>

RSS Gen  
Occupied Bandwidth


EUT	Bluetooth Speakerphone
Model	HFS210
Approval Holder	GN-Netcon A/S
Temperature / Voltage	tnom
Test Site / Operator	Eurofins / Mr. Treffke
Test Specification	4.4.1 Occupied Bandwidth
Comment 1	Channel.: 39 / 2441 MHz
Comment 2	A spectrum analyzer with an integrated 99% power bandwidth function is used
Comment 3	8DPSK

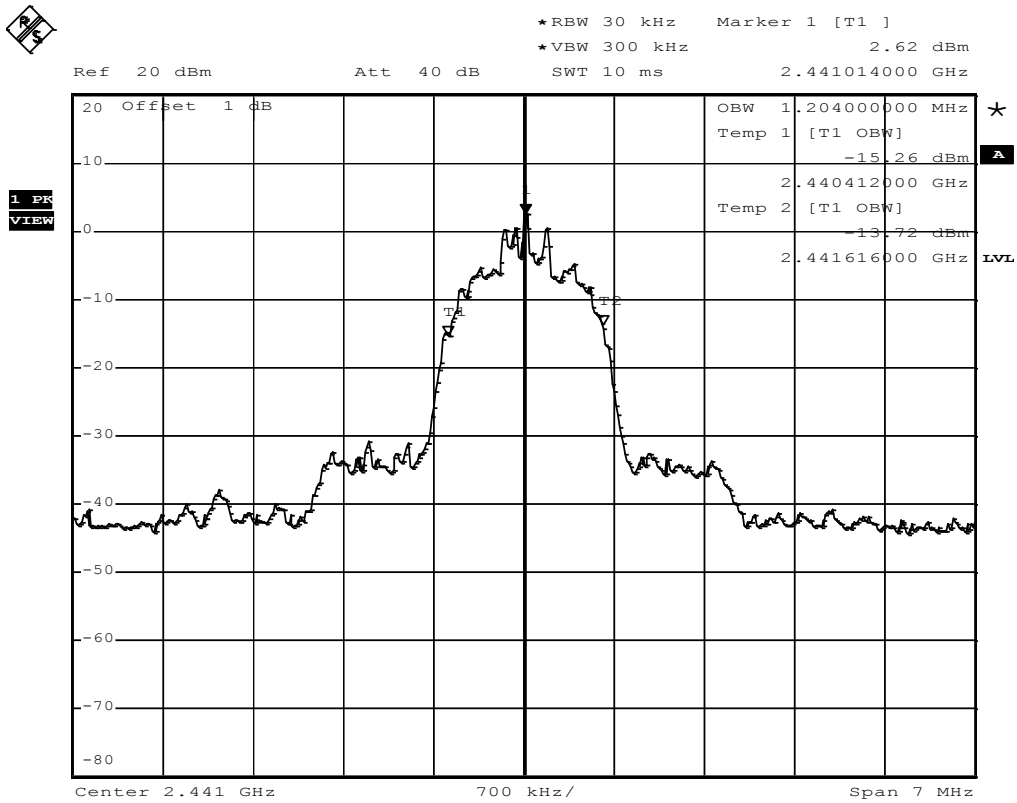

Comment: Occupied bandwidth: 1204 KHz  
Date: 27.AUG.2013 15:48:43


**Occupied Bandwidth – 3-DH5-Sngl F<sub>HIGH</sub>**
**RSS Gen  
Occupied Bandwidth**

EUT	Bluetooth Speakerphone
Model	HFS210
Approval Holder	GN-Netcon A/S
Temperature / Voltage	tnom
Test Site / Operator	Eurofins / Mr. Treffke
Test Specification	4.4.1 Occupied Bandwidth
Comment 1	Channel.: 78 / 2480 MHz
Comment 2	A spectrum analyzer with an integrated 99% power bandwidth function is used
Comment 3	8DPSK

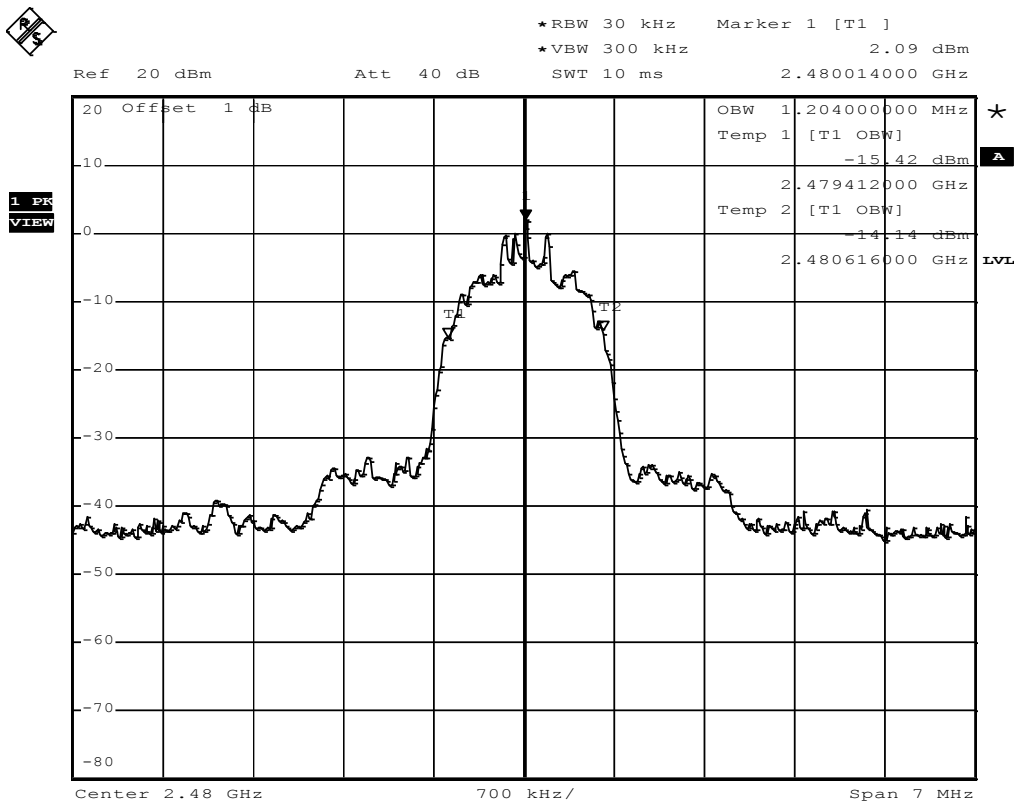

Comment: Occupied bandwidth: 1204 KHz  
 Date: 27.AUG.2013 15:50:35

**3.2 Test Conditions and Results – 20 dB Bandwidth**

20 dB Bandwidth acc. FCC 15.247 / IC RSS-210				Verdict: PASS	
EUT requirement rule parts and clause		Reference			
		FCC 15.247(a)(1) / IC RSS-210 A8.1			
Test according to measurement reference		Reference Method			
		FCC Public Notice DA 00-705			
Test frequency range		Tested frequencies			
		$F_{LOW} / F_{MID} / F_{HIGH}$			
Limits					
Limit			Condition		
1.5 · Carrier spacing			Output power ≤ 125 mW / 21 dBm		
1.0 · Carrier spacing			125 mW / 21 dBm < Output power ≤ 1 W / 30 dBm		
Test setup					
					
Test procedure					
<ol style="list-style-type: none"> <li>1. EUT set to test mode (Communication tester is used if needed)</li> <li>2. Span set to at least twice the emission spectrum</li> <li>3. Detector set to peak and max hold</li> <li>4. Envelope peak value of emission spectrum is selected</li> <li>5. Marker on envelope of spectrum is set to level of -20 dB to the left of the peak</li> <li>6. Marker on envelope of spectrum is set to level of -20 dB to the right of the peak</li> <li>7. 20dB Bandwidth is determined by marker frequency separation</li> </ol>					
Test results					
Channel	Frequency [MHz]	Mode	20 dB Bandwidth [MHz]	Limit [MHz]	Result
$F_{LOW}$	2402	DH5-Sngl	0.882	1.5	PASS
$F_{MID}$	2441	DH5-Sngl	0.926	1.5	PASS
$F_{HIGH}$	2480	DH5-Sngl	0.887	1.5	PASS
$F_{LOW}$	2402	2DH5-Sngl	1.195	1.5	PASS
$F_{MID}$	2441	2DH5-Sngl	1.190	1.5	PASS
$F_{HIGH}$	2480	2DH5-Sngl	1.195	1.5	PASS
$F_{LOW}$	2402	3DH5-Sngl	1.265	1.5	PASS
$F_{MID}$	2441	3DH5-Sngl	1.243	1.5	PASS
$F_{HIGH}$	2480	3DH5-Sngl	1.239	1.5	PASS
Comments:					

---


 Test Report No.: G0M-1308-3134-TFC247B-V01
 

---

 Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

**20 dB Bandwidth – DH5-Sngl F<sub>LOW</sub>**
**FCC part 15.247  
20 dB bandwidth**


EUT	Bluetooth Speakerphone
Model	HFS210
Approval Holder	GN-Netcon A/S
Temperature / Voltage	tnom
Test Site / Operator	Eurofins / Mr. Treffke
Test Specification	FCC part 15 section 247(a)
Comment 1	20 dB bandwidth
Comment 2	Channel.: 0 / 2402 MHz / GFSK
Comment 3	pass

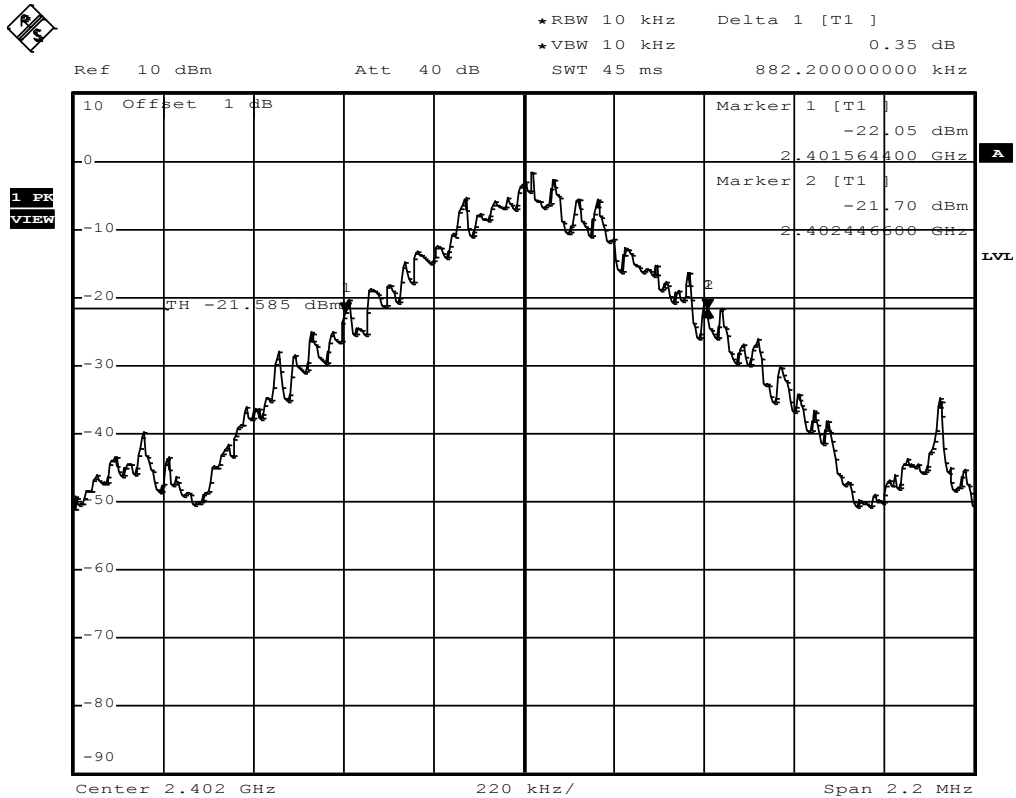

Comment: 20 dB bandwidth: 882.2 KHz  
 Date: 27.AUG.2013 07:06:40

**20 dB Bandwidth – DH5-Sngl F<sub>MID</sub>**
**FCC part 15.247**  
**20 dB bandwidth**

EUT	Bluetooth Speakerphone
Model	HFS210
Approval Holder	GN-Netcon A/S
Temperature / Voltage	tnom
Test Site / Operator	Eurofins / Mr. Treffke
Test Specification	FCC part 15 section 247(a)
Comment 1	20 dB bandwidth
Comment 2	Channel.: 39 / 2441 MHz / GFSK
Comment 3	pass

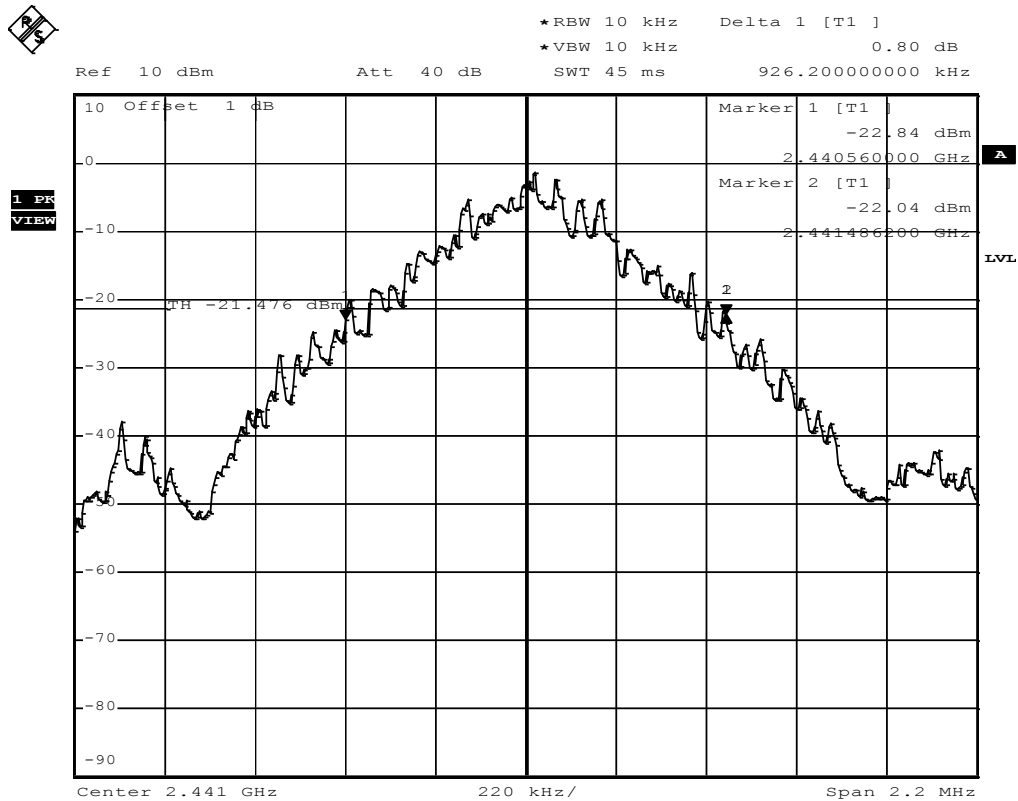


Comment: 20 dB bandwidth: 926.2 KHz  
 Date: 27.AUG.2013 07:08:14



**20 dB Bandwidth – DH5-Sngl F<sub>HIGH</sub>**
**FCC part 15.247**  
**20 dB bandwidth**


EUT	Bluetooth Speakerphone
Model	HFS210
Approval Holder	GN-Netcon A/S
Temperature / Voltage	tnom
Test Site / Operator	Eurofins / Mr. Treffke
Test Specification	FCC part 15 section 247(a)
Comment 1	20 dB bandwidth
Comment 2	Channel.: 78 / 2480 MHz / GFSK
Comment 3	pass

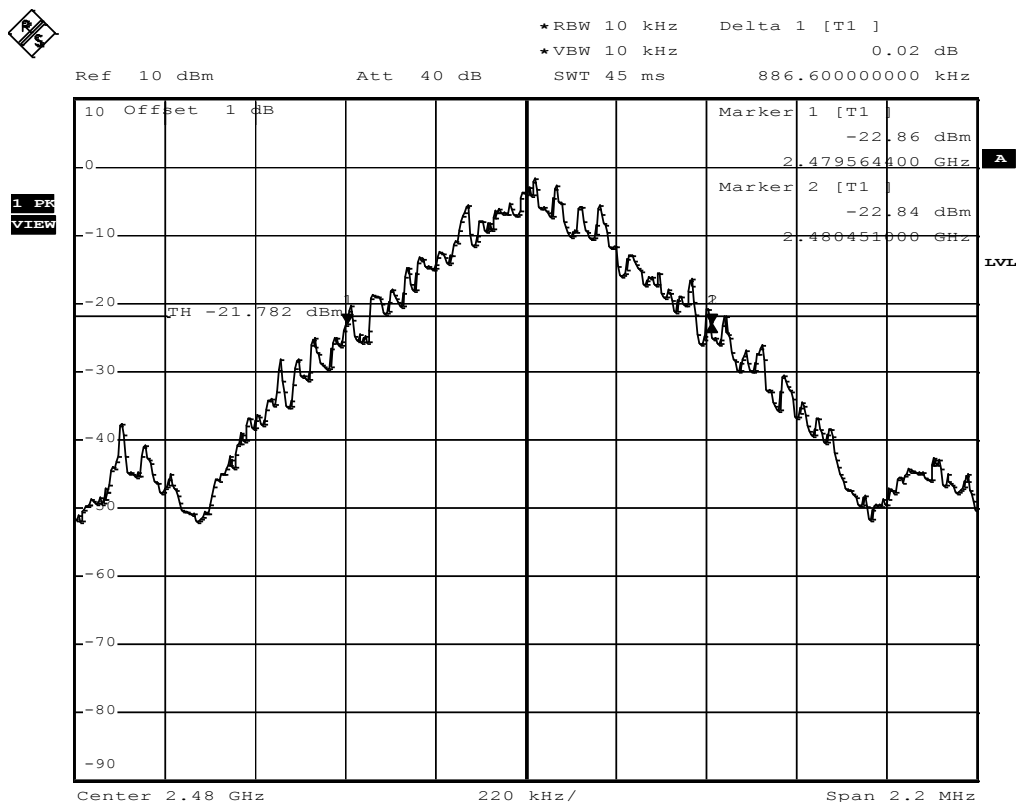

Comment: 20 dB bandwidth: 886.6 KHz  
 Date: 27.AUG.2013 07:09:40

**20 dB Bandwidth – 2-DH5-Sngl F<sub>Low</sub>**
**FCC part 15.247**  
**20 dB bandwidth**


EUT	Bluetooth Speakerphone
Model	HFS210
Approval Holder	GN-Netcon A/S
Temperature / Voltage	tnom
Test Site / Operator	Eurofins / Mr. Treffke
Test Specification	FCC part 15 section 247(a)
Comment 1	20 dB bandwidth
Comment 2	Channel.: 0 / 2402 MHz / Pi/4 DQPSK
Comment 3	pass

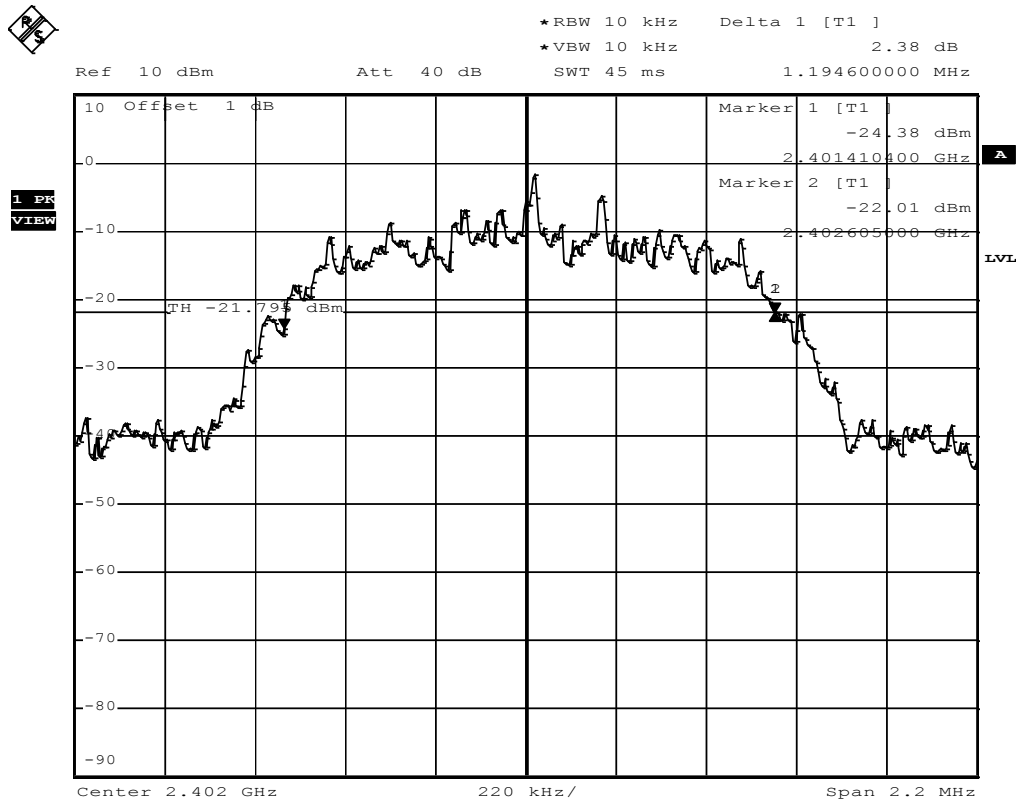

Comment: 20 dB bandwidth: 1194.6 KHz  
 Date: 27.AUG.2013 06:55:32

**20 dB Bandwidth – 2-DH5-Sngl F<sub>MID</sub>**
**FCC part 15.247**  
**20 dB bandwidth**


EUT	Bluetooth Speakerphone
Model	HFS210
Approval Holder	GN-Netcon A/S
Temperature / Voltage	tnom
Test Site / Operator	Eurofins / Mr. Treffke
Test Specification	FCC part 15 section 247(a)
Comment 1	20 dB bandwidth
Comment 2	Channel.: 39 / 2441 MHz / Pi/4 DQPSK
Comment 3	pass

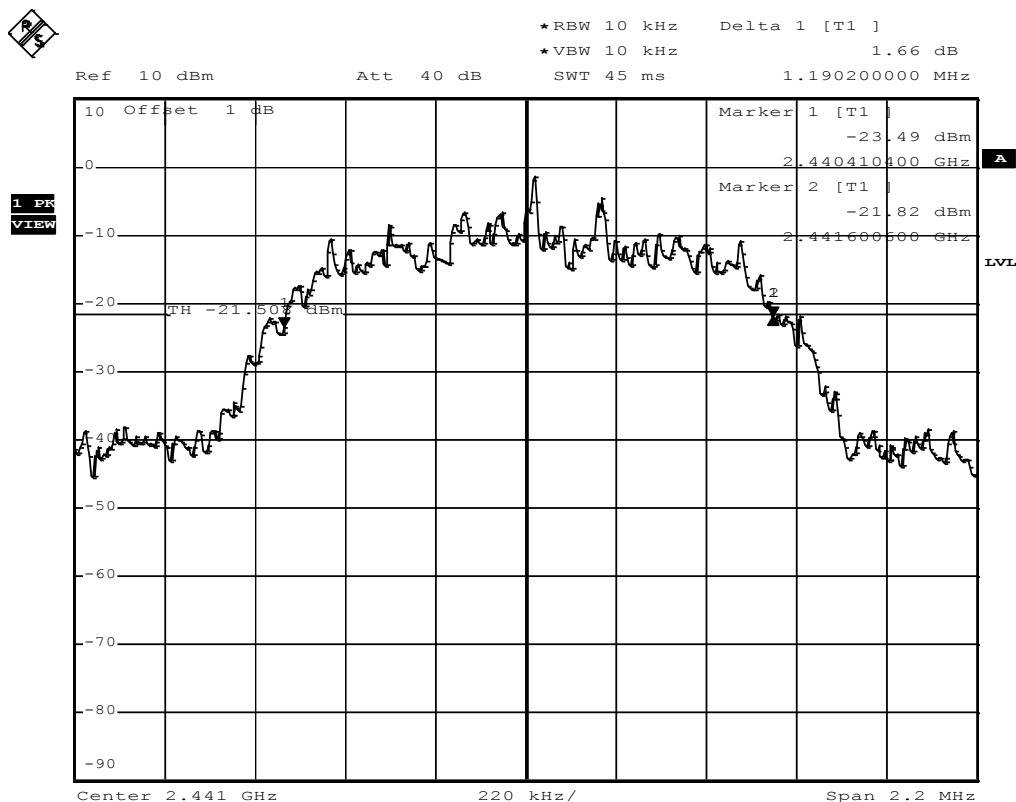

Comment: 20 dB bandwidth: 1190.2 KHz  
 Date: 27.AUG.2013 06:56:38

**20 dB Bandwidth – 2-DH5-Sngl F<sub>HIGH</sub>**
**FCC part 15.247**  
**20 dB bandwidth**


EUT	Bluetooth Speakerphone
Model	HFS210
Approval Holder	GN-Netcon A/S
Temperature / Voltage	tnom
Test Site / Operator	Eurofins / Mr. Treffke
Test Specification	FCC part 15 section 247(a)
Comment 1	20 dB bandwidth
Comment 2	Channel.: 78 / 2480 MHz / Pi/4 DQPSK
Comment 3	pass

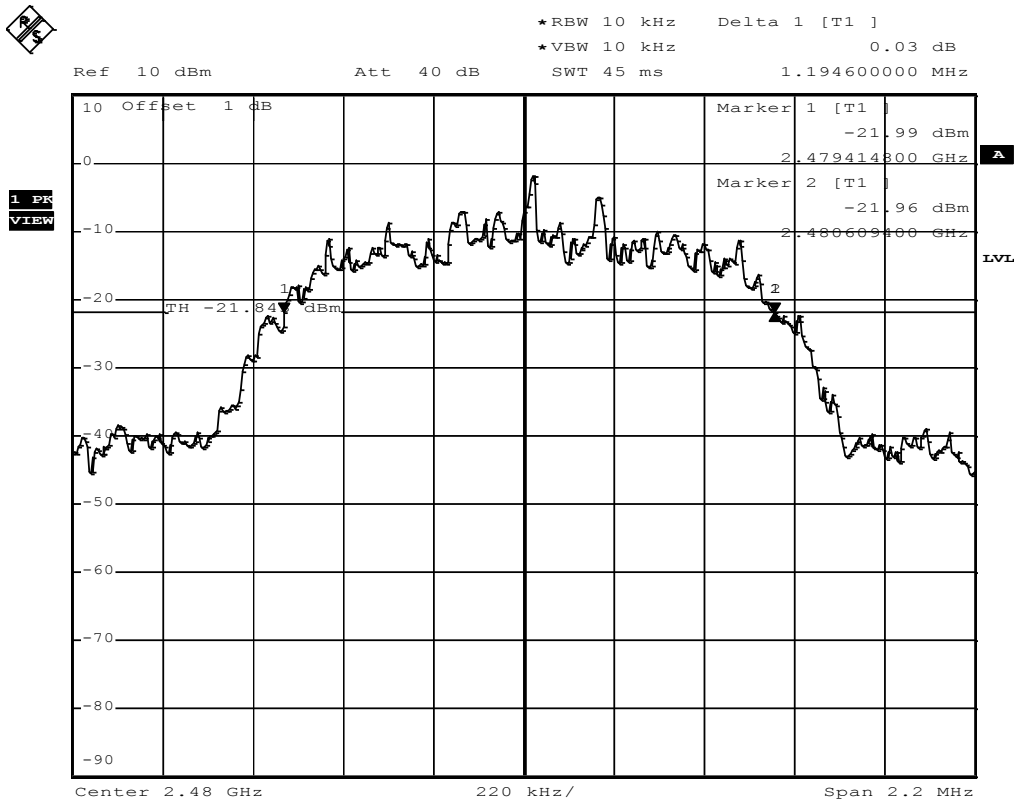

Comment: 20 dB bandwidth: 1194.6 KHz  
 Date: 27.AUG.2013 06:59:52

**20 dB Bandwidth – 3-DH5-Sngl F<sub>Low</sub>**
**FCC part 15.247**  
**20 dB bandwidth**


EUT	Bluetooth Speakerphone
Model	HFS210
Approval Holder	GN-Netcon A/S
Temperature / Voltage	tnom
Test Site / Operator	Eurofins / Mr. Treffke
Test Specification	FCC part 15 section 247(a)
Comment 1	20 dB bandwidth
Comment 2	Channel.: 0 / 2402 MHz / 8DPPSK
Comment 3	pass

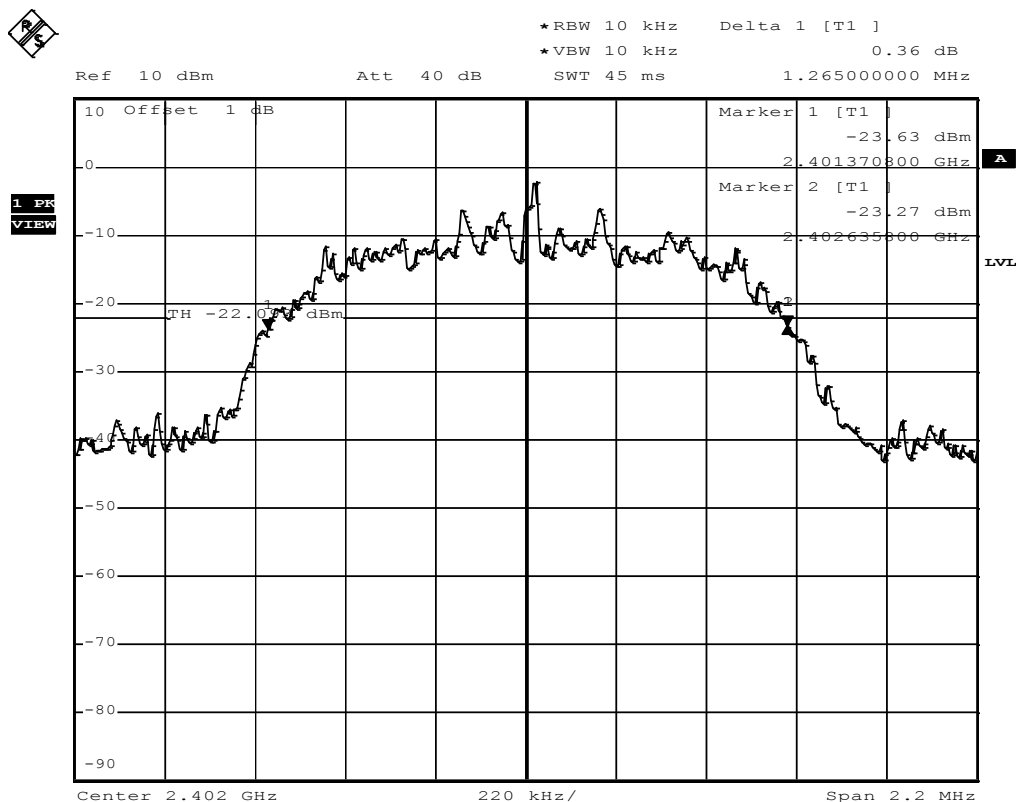

Comment: 20 dB bandwidth: 1265 KHz  
 Date: 27.AUG.2013 07:05:11

**20 dB Bandwidth – 3-DH5-Sngl F<sub>MID</sub>**
**FCC part 15.247**  
**20 dB bandwidth**


EUT	Bluetooth Speakerphone
Model	HFS210
Approval Holder	GN-Netcon A/S
Temperature / Voltage	tnom
Test Site / Operator	Eurofins / Mr. Treffke
Test Specification	FCC part 15 section 247(a)
Comment 1	20 dB bandwidth
Comment 2	Channel.: 39 / 2441 MHz / 8DPPSK
Comment 3	pass

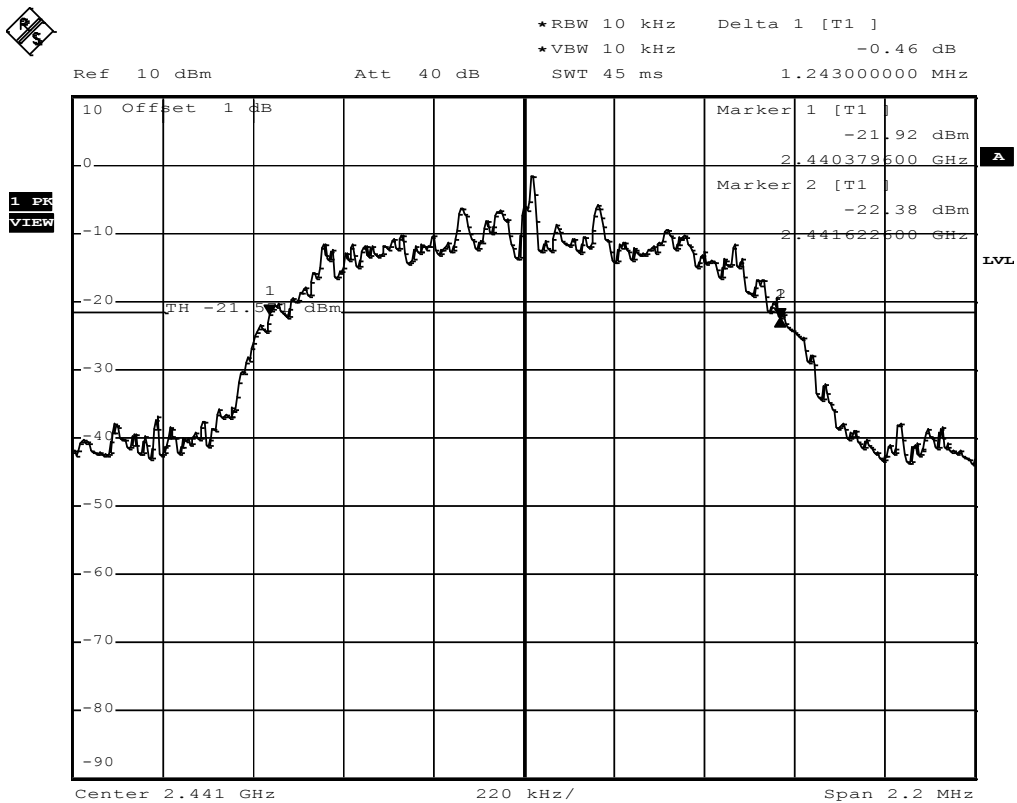

Comment: 20 dB bandwidth: 1243 KHz  
 Date: 27.AUG.2013 07:03:50


**20 dB Bandwidth – 3-DH5-Sngl F<sub>HIGH</sub>**
**FCC part 15.247**  
**20 dB bandwidth**

EUT	Bluetooth Speakerphone
Model	HFS210
Approval Holder	GN-Netcon A/S
Temperature / Voltage	tnom
Test Site / Operator	Eurofins / Mr. Treffke
Test Specification	FCC part 15 section 247(a)
Comment 1	20 dB bandwidth
Comment 2	Channel.: 78 / 2480 MHz / 8DPPSK
Comment 3	pass

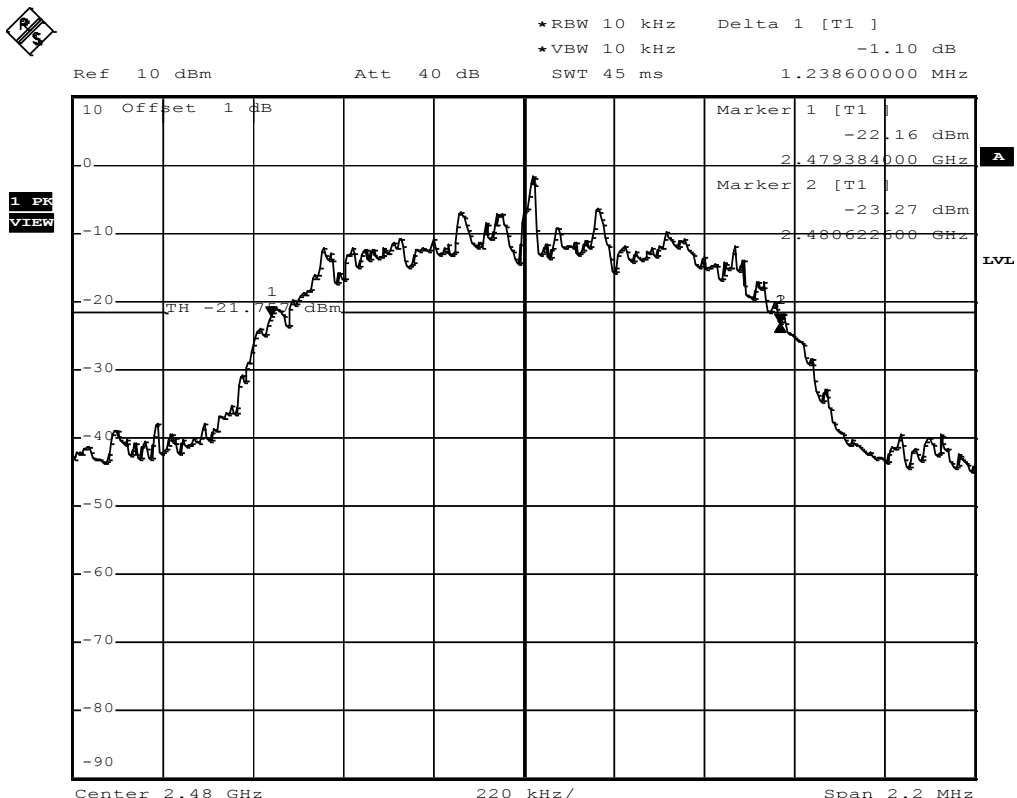

Comment: 20 dB bandwidth: 1238.6 KHz  
 Date: 27.AUG.2013 07:01:45


**3.3 Test Conditions and Results – Number of hopping frequencies**
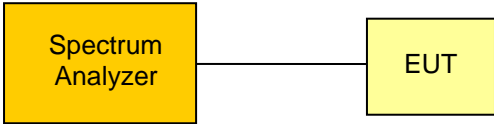
<b>Number of hopping frequencies acc. FCC 15.247 / IC RSS-210</b>		<b>Verdict: PASS</b>
EUT requirement rule parts and clause	Reference	
	FCC 15.247(a)(1)(iii) / IC RSS-210 A8.1	
Test according to measurement reference	Reference Method	
	FCC Public Notice DA 00-705	
Test frequency range	Tested frequencies	
	$F_{LOW} - F_{HIGH}$	
EUT test mode	DH5-Hop	
<b>Limits</b>		
Limit	Condition	
Number of hopping channels $\geq 15$	Output power $\leq 125$ mW / 21 dBm	
Number of hopping channels $\geq 75$	$125$ mW / 21 dBm < Output power $\leq 1$ W / 30 dBm	
<b>Test setup</b>		
		
<b>Test procedure</b>		
<ol style="list-style-type: none"> <li>1. EUT set to test mode (Communication tester is used if needed)</li> <li>2. Span set to measurement frequency range</li> <li>3. Detector set to peak and max hold</li> <li>4. Resolution bandwidth is set small enough to resolve hopping channel emission spectra</li> <li>5. The number of peaks is counted to determine number of hopping frequencies</li> </ol>		
<b>Test results</b>		
Number of hopping frequencies	Limit	Result
79	$\geq 15$	PASS
Comments:		



**Number of hopping frequencies - Range A**
**FCC part 15.247**
**Number of hopping frequencies**


EUT	Bluetooth Speakerphone
Model	HFS210
Approval Holder	GN-Netcon A/S
Temperature / Voltage	tnom
Test Site / Operator	Eurofins / Mr. Treffke
Test Specification	FCC part 15 section 247(a)
Comment 1	Number of hopping frequencies
Comment 2	Channel.: 0-24
Comment 3	pass

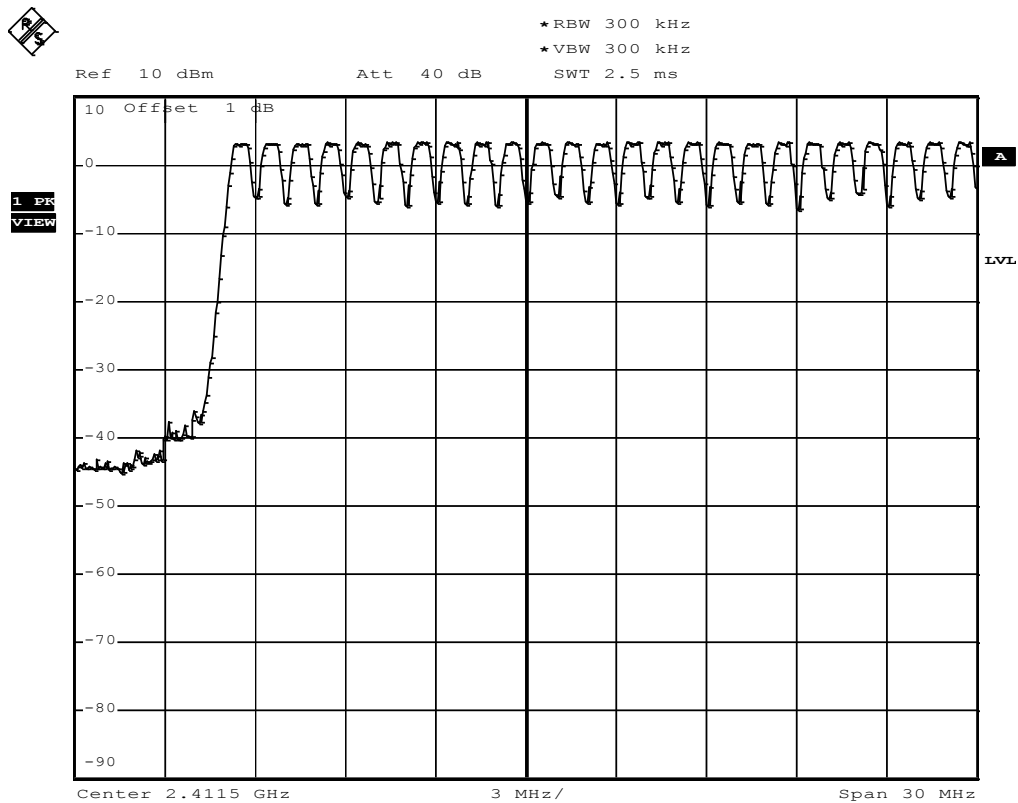

Comment: Number of hopping frequencies  
 Date: 27.AUG.2013 14:56:10

**Number of hopping frequencies - Range B**
**FCC part 15.247**
**Number of hopping frequencies**


EUT	Bluetooth Speakerphone
Model	HFS210
Approval Holder	GN-Netcon A/S
Temperature / Voltage	tnom
Test Site / Operator	Eurofins / Mr. Treffke
Test Specification	FCC part 15 section 247(a)
Comment 1	Number of hopping frequencies
Comment 2	Channel.: 25-54
Comment 3	pass

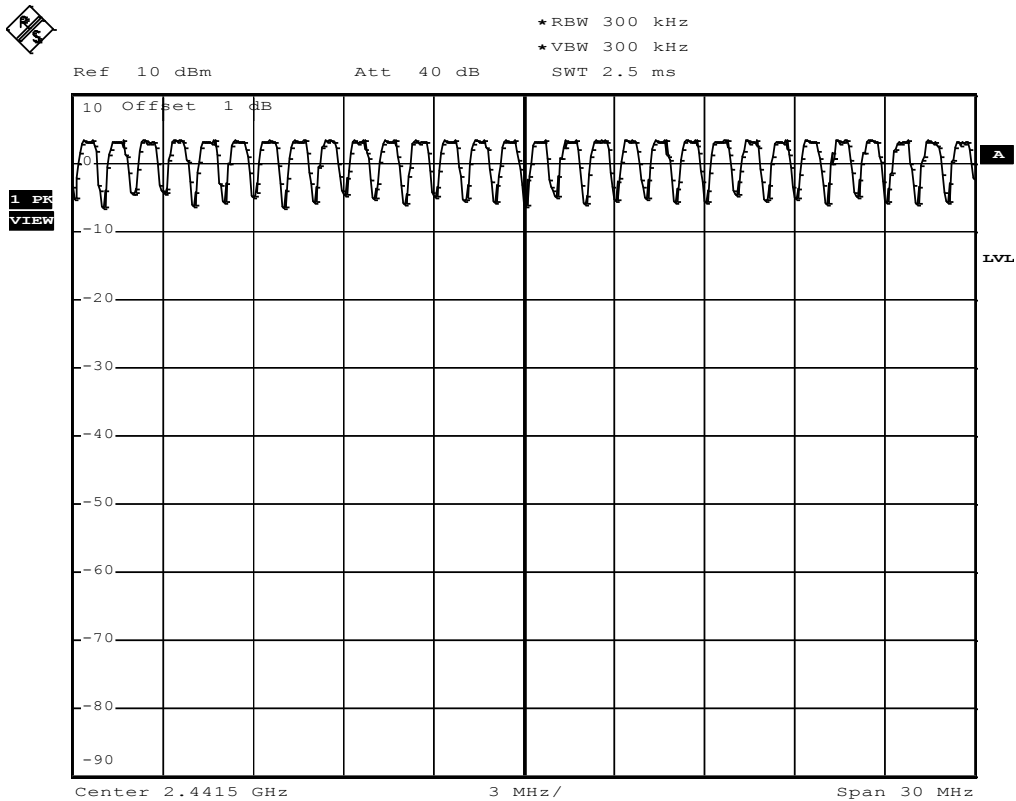

Comment: Number of hopping frequencies  
Date: 27.AUG.2013 14:57:25


**Number of hopping frequencies - Range C**
**FCC part 15.247**
**Number of hopping frequencies**

EUT	Bluetooth Speakerphone
Model	HFS210
Approval Holder	GN-Netcon A/S
Temperature / Voltage	tnom
Test Site / Operator	Eurofins / Mr. Treffke
Test Specification	FCC part 15 section 247(a)
Comment 1	Number of hopping frequencies
Comment 2	Channel.: 55-78
Comment 3	pass

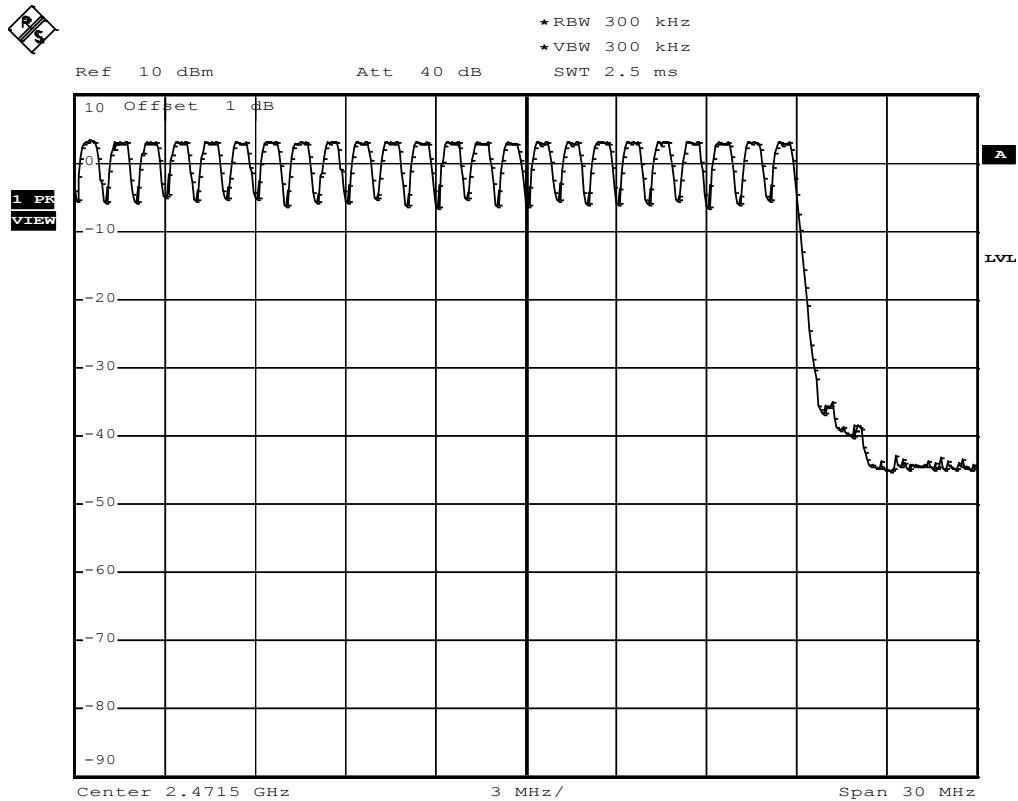


Comment: Number of hopping frequencies  
Date: 27.AUG.2013 14:58:49

**3.4 Test Conditions and Results – Frequency hopping channel separation**

<b>Frequency hopping channel separation acc. FCC 15.247 / IC RSS-210</b>		<b>Verdict: PASS</b>
EUT requirement rule parts and clause	Reference	
	FCC 15.247(a)(1) / IC RSS-210 A8.1	
Test according to measurement reference	Reference Method	
	FCC Public Notice DA 00-705	
Test frequency range	Tested frequencies	
	2441 & 2442 MHz	
EUT test mode	DH5-Hop	
<b>Limits</b>		
Limit	Condition	
≥ 25 kHz or $\frac{2}{3}$ of 20 dB bandwidth	Output power ≤ 125 mW / 21 dBm	
≥ 25 kHz or 20 dB bandwidth	125 mW / 21 dBm < Output power ≤ 1 W / 30 dBm	
<b>Test setup</b>		
		
<b>Test procedure</b>		
<ol style="list-style-type: none"> <li>1. EUT set to test mode (Communication tester is used if needed)</li> <li>2. Span set to measurement frequency range</li> <li>3. Detector set to peak and max hold</li> <li>4. Resolution bandwidth is set small enough to resolve hopping channel emission spectra</li> <li>5. The two adjacent channel peaks are marked</li> <li>6. Channel separation is determined from frequency separation of markers</li> </ol>		
<b>Test results</b>		
Channel separation [kHz]	Limit [kHz]	Result
1000	$\geq \frac{2}{3} \cdot 926 = 617.33$	PASS
Comments:		


**Frequency hopping channel separation**
**FCC part 15.247**
**Carrier frequency separation**

EUT	Bluetooth Speakerphone
Model	HFS210
Approval Holder	GN-Netcon A/S
Temperature / Voltage	tnom
Test Site / Operator	Eurofins / Mr. Treffke
Test Specification	FCC part 15 section 247(a)(1)
Comment 1	Carrier frequency separation
Comment 2	Channel.: 39/40 / 2441/2442 MHz
Comment 3	Hopping mode

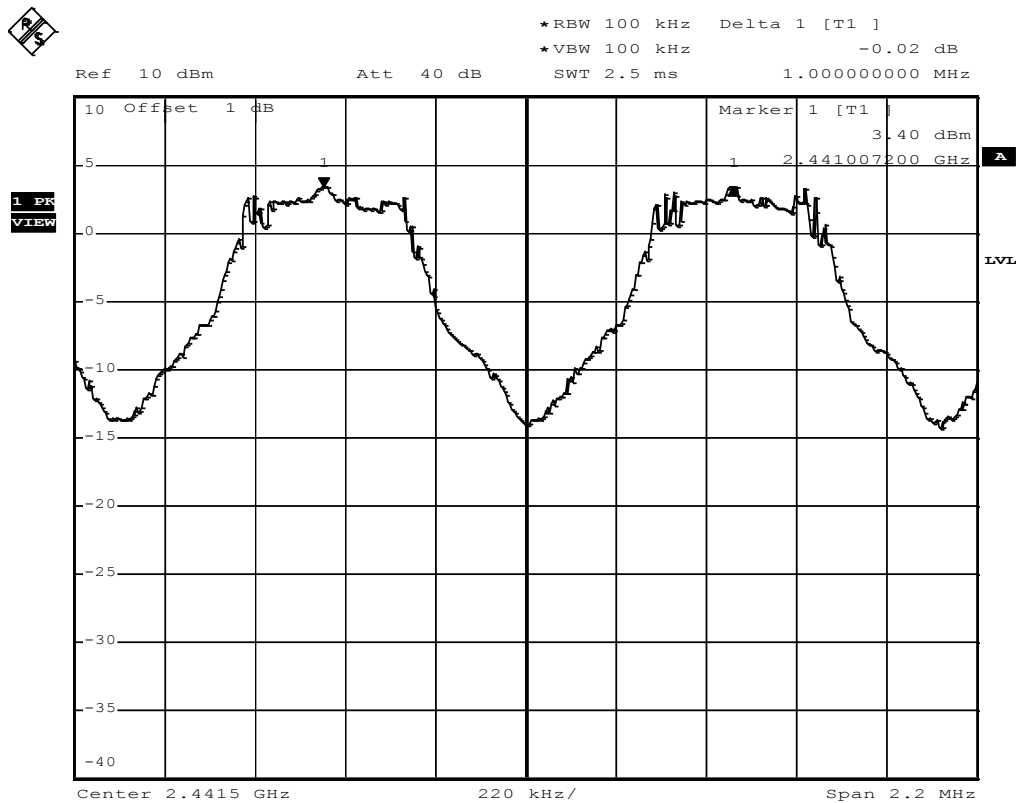



Comment: Limit: > two-thirds of the 20 dB bandwidth ; Result: Pass  
 Date: 27.AUG.2013 14:53:58

**3.5 Test Conditions and Results – Time of occupancy (Dwell Time)**
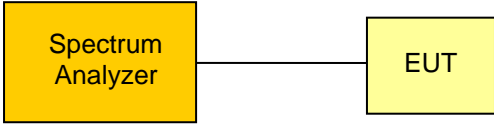
<b>Time of occupancy (Dwell time) acc. FCC 15.247 / IC RSS-210</b>				<b>Verdict: PASS</b>	
EUT requirement rule parts and clause	Reference				
	FCC 15.247(a)(1)(iii) / IC RSS-210 A8.1				
Test according to measurement reference	Reference Method				
	FCC Public Notice DA 00-705				
Test frequency range	Tested frequencies				
	2441 MHz				
EUT test mode	DH5-Hop				
<b>Limits</b>					
Limit					
Time of occupancy $\leq 0.4$ s within 0.4 s · Number of hopping channels					
<b>Test setup</b>					
					
<b>Test procedure</b>					
<ol style="list-style-type: none"> <li>1. EUT set to test mode (Communication tester is used if needed)</li> <li>2. Center frequency set to test channel center frequency</li> <li>3. Span set to zero span and detector to peak and max hold</li> <li>4. Resolution bandwidth is set to 100kHz and sweep time to observation period</li> <li>5. Time of occupancy determined from number of peaks multiplied by single hop dwell time</li> </ol>					
<b>Test results</b>					
Observation period [s]	No. of hops	Dwell time/hop [s]	Time of occupancy [s]	Limit [s]	Result
31.6	110	0.00291	0.320	$\leq 0.4$	PASS
Comments:					


**Time of occupancy**
**FCC part 15.247**
**Time of occupancy (dwell time)**

EUT	Bluetooth Speakerphone
Model	HFS210
Approval Holder	GN-Netcon A/S
Temperature / Voltage	tnom
Test Site / Operator	Eurofins / Mr. Treffke
Test Specification	FCC part 15 section 247(a)
Comment 1	Time of occupancy
Comment 2	Channel.: 39 / 2441 MHz (Hopping mode)
Comment 3	110 events * 2.910 ms result: 320.1 ms

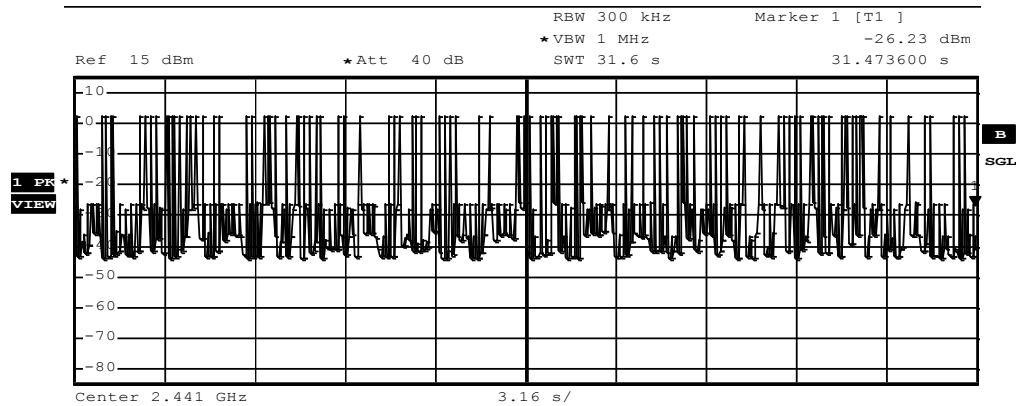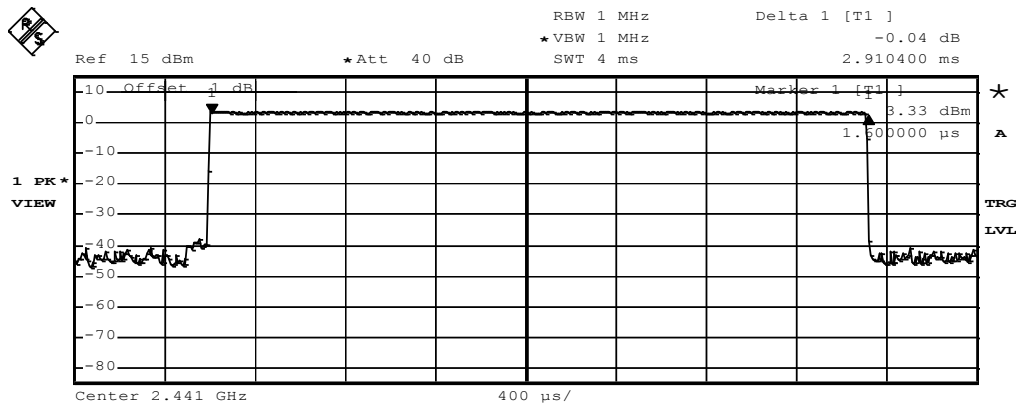

Comment: Burst length=2.9104 ms  
 Date: 27.AUG.2013 15:10:09

**3.6 Test Conditions and Results – Maximum peak conducted power**
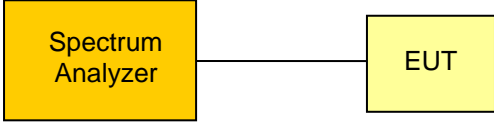
<b>Maximum peak conducted power acc. FCC 15.247 / IC RSS-210</b>		<b>Verdict: PASS</b>
EUT requirement rule parts and clause	Reference	
	FCC 15.247(b)(1) / IC RSS-210 A8.4	
Test according to measurement reference	Reference Method	
	FCC Public Notice DA 00-705	
Test frequency range	Tested frequencies	
	$F_{LOW} / F_{MID} / F_{HIGH}$	
Measurement mode	Peak	
Maximum antenna gain	2.5 dBi $\Rightarrow$ Limit correction = 0 dB	
<b>Limits</b>		
Limit	Condition	
1 W (30 dBm)	Number of hopping channels $\geq$ 75	
0.125 W (21 dBm)	75 > Number of hopping channels $\geq$ 15	
<p>The conducted output power limit specified above is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in the table, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>		
<b>Test setup</b>		
 <pre> graph LR     SA[Spectrum Analyzer] --- EUT[EUT]             </pre>		
<b>Test procedure</b>		
<ol style="list-style-type: none"> <li>1. EUT set to test mode (Communication tester is used if needed)</li> <li>2. Center frequency set to test channel center frequency</li> <li>3. Span set to twice the 20 dB bandwidth and detector to peak and max hold</li> <li>4. Resolution bandwidth is set to 3 MHz</li> <li>5. Peak conducted power is determined from peak of spectrum envelope</li> </ol>		



Test results								
Channel	Frequency [MHz]	Voltage	Mode	Peak power [dbm]	Peak power [W]	Limit [dBm]	Margin [dB]	Result
F <sub>LOW</sub>	2402	3.7 VDC	DH5-Sngl	3.94	0.002	30	-26.06	PASS
F <sub>MID</sub>	2441	3.7 VDC	DH5-Sngl	4.17	0.003	30	-25.83	PASS
F <sub>HIGH</sub>	2480	3.7 VDC	DH5-Sngl	3.80	0.002	30	-26.20	PASS
F <sub>LOW</sub>	2402	3.7 VDC	2DH5-Sngl	4.31	0.003	30	-25.69	PASS
F <sub>MID</sub>	2441	3.7 VDC	2DH5-Sngl	4.48	0.003	30	-25.52	PASS
F <sub>HIGH</sub>	2480	3.7 VDC	2DH5-Sngl	3.88	0.002	30	-26.12	PASS
F <sub>LOW</sub>	2402	3.7 VDC	3DH5-Sngl	4.38	0.003	30	-25.62	PASS
F <sub>MID</sub>	2441	3.7 VDC	3DH5-Sngl	4.50	0.003	30	-25.50	PASS
F <sub>HIGH</sub>	2480	3.7 VDC	3DH5-Sngl	4.07	0.003	30	-25.93	PASS
Comments:								

**3.7 Test Conditions and Results – AC power line conducted emissions**


<b>Power line conducted emissions acc. FCC 47 CFR 15.207 / IC RSS-Gen</b>		<b>Verdict: PASS</b>		
Test according referenced standards	Reference Method			
	ANSI C63.4			
Fully configured sample scanned over the following frequency range	Frequency range			
	0.15 MHz to 30 MHz			
Points of Application	Application Interface			
AC Mains	LISN			
EUT test mode	AC-Powerline			
<b>Limits and results</b>				
Frequency [MHz]	Quasi-Peak [dB $\mu$ V]	Result	Average [dB $\mu$ V]	Result
0.15 to 5	66 to 56*	PASS	56 to 46*	PASS
0.5 to 5	56	PASS	46	PASS
5 to 30	60	PASS	50	PASS
Comments: * Limit decreases linearly with the logarithm of the frequency.				

**Conducted Emissions**
**EMI voltage test in the ac-mains according to FCC Part 15b**

Project number: G0M-1308-3134

Manufacturer:	GN Netcom A/S
EUT Name:	Bluetooth Speakerphone
Model:	HFS210
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Handrik
Test Conditions:	Tnom: 23°C, Unom: USB charging
LISN:	ESH2-Z5 N
Mode:	active: charging, play MP3
Test Date:	2013-08-22
Note:	

Index 1

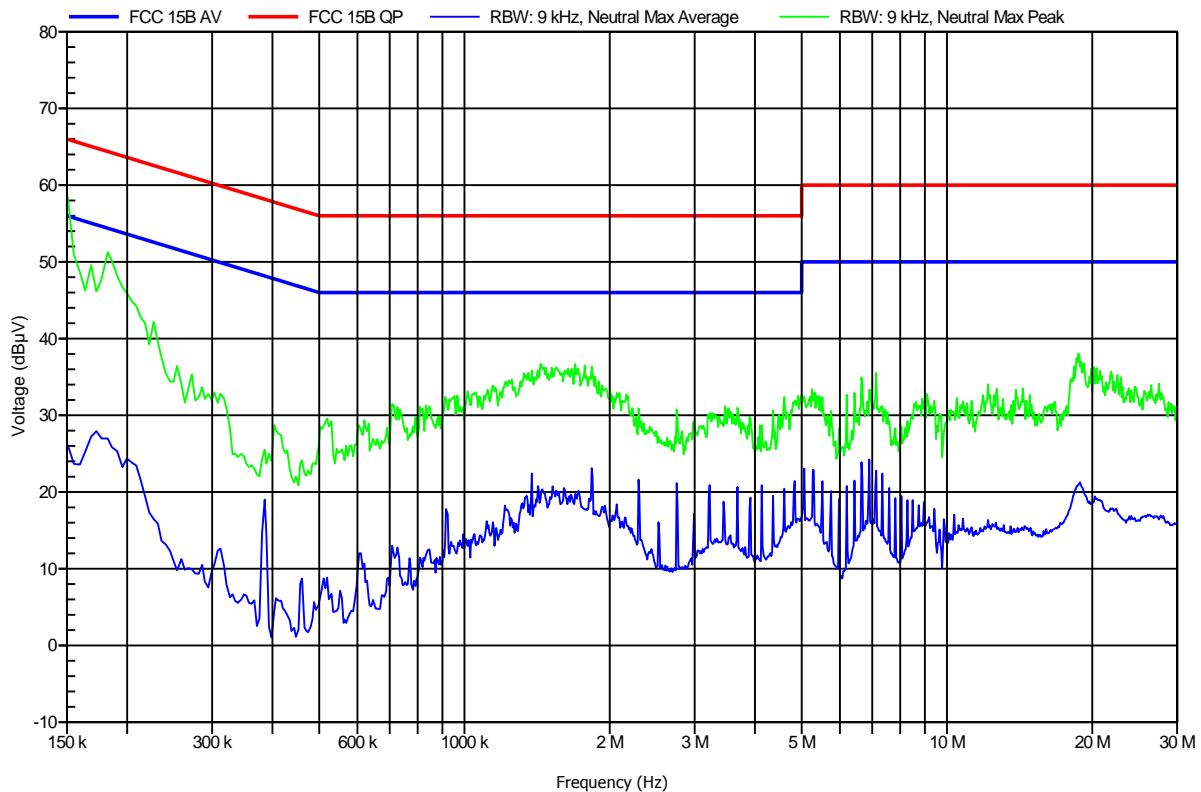


**Conducted Emissions**
**EMI voltage test in the ac-mains according to FCC Part 15b**


Project number: G0M-1308-3134

Manufacturer: GN Netcom A/S  
 EUT Name: Bluetooth Speakerphone  
 Model: HFS210  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Handrik  
 Test Conditions: Tnom: 23°C, Unom: USB charging  
 LISN: ESH2-Z5 L  
 Mode: active: charging, play MP3  
 Test Date: 2013-08-22  
 Note:

Index 2

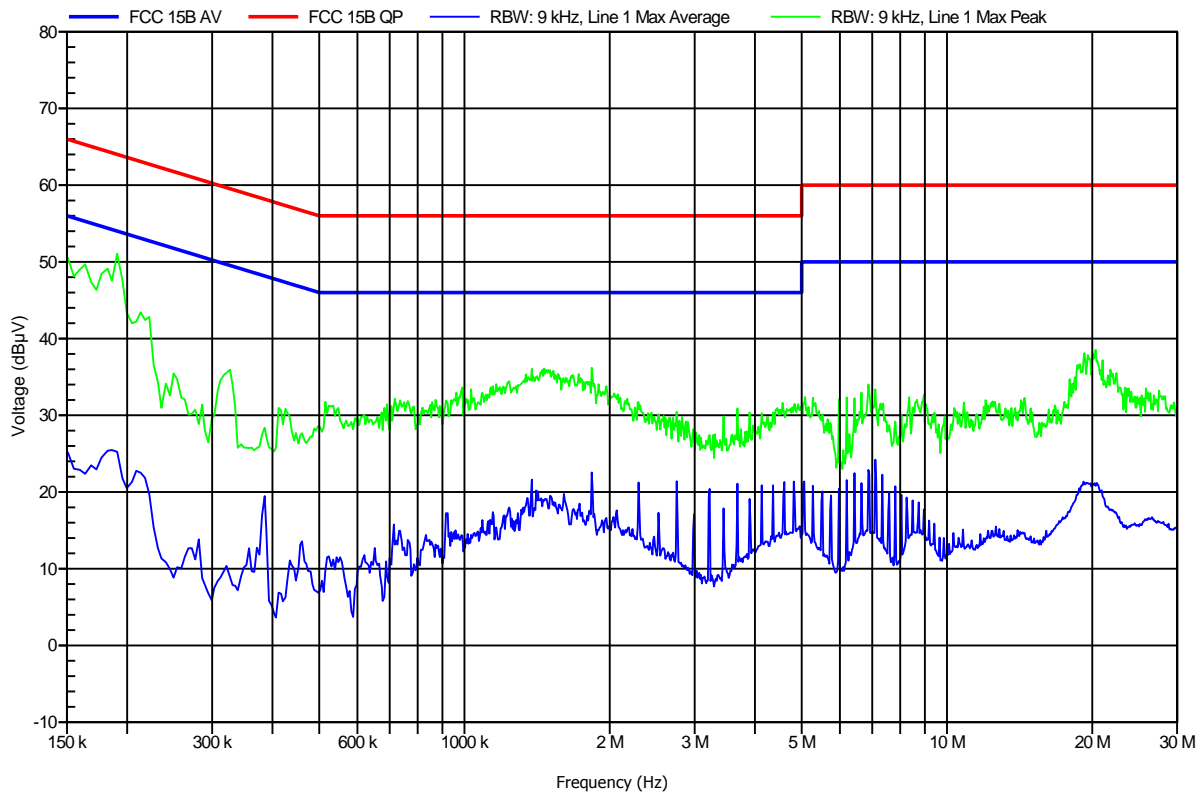


**3.8 Test Conditions and Results – Band edge compliance**

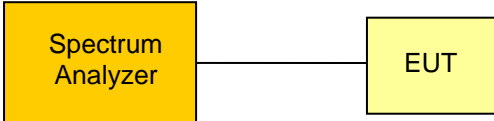Band-edge compliance acc. FCC 15.247 / IC RSS-210				Verdict: PASS		
EUT requirement rule parts and clause	Reference					
	FCC 15.247(d) / IC RSS-210 A8.5					
Test according to measurement reference	Reference Method					
	FCC Public Notice DA 00-705					
Test frequency range	Tested frequencies					
	$F_{LOW} / F_{HIGH}$					
Measurement mode	Peak					
Limits						
Limit			Condition			
$\leq -20$ dB/100 kHz			Peak power measurement detector = Peak			
$\leq -30$ dB/100 kHz			Peak power measurement detector = RMS			
Test setup						
 <pre> graph LR     SA[Spectrum Analyzer] --- EUT[EUT]             </pre>						
Test procedure						
<ol style="list-style-type: none"> <li>EUT set to test mode (Communication tester is used if needed)</li> <li>Span set around lower band edge and detector is set to peak and max hold</li> <li>Resolution bandwidth is set to 100 kHz</li> <li>Markers are set to peak emission levels within frequency band and outside frequency band</li> <li>Band edge attenuation is determined from level difference</li> </ol>						
Test results						
Channel	Frequency [MHz]	Mode	Level [dBc]	Limit [dBc]	Margin [dB]	Result
$F_{LOW}$	2402	DH5-Sngl	-44.85	-20	-24.85	PASS
$F_{HIGH}$	2480	DH5-Sngl	-51.48	-20	-31.48	PASS
$F_{LOW}$	2402	DH5-Hop	-44.47	-20	-24.47	PASS
$F_{HIGH}$	2480	DH5-Hop	-51.01	-20	-31.01	PASS
$F_{LOW}$	2402	2DH5-Sngl	-40.64	-20	-20.64	PASS
$F_{HIGH}$	2480	2DH5-Sngl	-48.78	-20	-28.78	PASS
$F_{LOW}$	2402	2DH5-Hop	-43.76	-20	-23.76	PASS
$F_{HIGH}$	2480	2DH5-Hop	-50.28	-20	-30.28	PASS

F <sub>LOW</sub>	2402	3DH5-Sngl	-39.68	-20	-19.68	PASS
F <sub>HIGH</sub>	2480	3DH5-Sngl	-50.52	-20	-30.52	PASS
F <sub>LOW</sub>	2402	3DH5-Hop	-40.91	-20	-20.91	PASS
F <sub>HIGH</sub>	2480	3DH5-Hop	-50.23	-20	-30.23	PASS
Comments:						

**Band-edge compliance – DH5-Sngl F<sub>Low</sub>**
**FCC part 15.247**
**Band-edge compliance of RF conducted emissions**


EUT	Bluetooth Speakerphone
Model	HFS210
Approval Holder	GN-Netcon A/S
Temperature / Voltage	tnom
Test Site / Operator	Eurofins / Mr. Treffke
Test Specification	FCC part 15 section 247(c)
Comment 1	Band-edge compliance
Comment 2	Channel.: 0 / 2402 MHz / GFSK
Comment 3	Single frequency mode

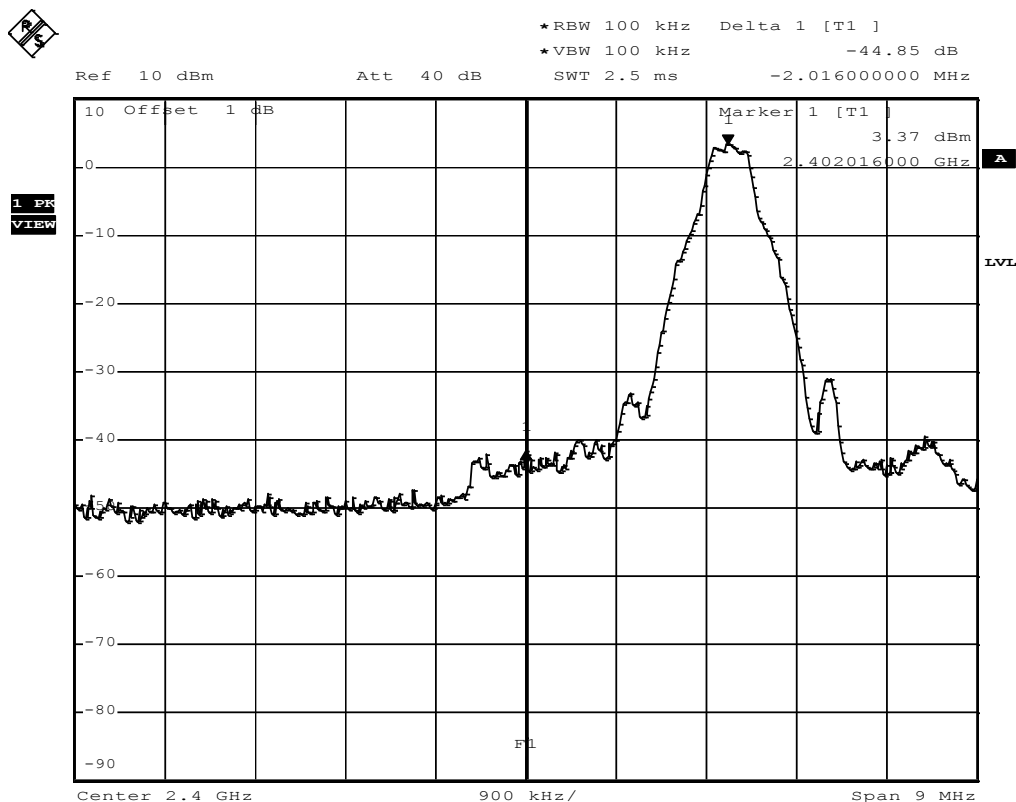

Comment: Limit: Marker Delta value >20 dB; Result: PASS  
 Date: 27.AUG.2013 07:23:09

**Band-edge compliance – DH5-Sngl F<sub>HIGH</sub>**
**FCC part 15.247**
**Band-edge compliance of RF conducted emissions**

EUT	Bluetooth Speakerphone
Model	HFS210
Approval Holder	GN-Netcon A/S
Temperature / Voltage	tnom
Test Site / Operator	Eurofins / Mr. Treffke
Test Specification	FCC part 15 section 247(c)
Comment 1	Band-edge compliance
Comment 2	Channel.: 78/ 2480 MHz / GFSK
Comment 3	Single frequency mode

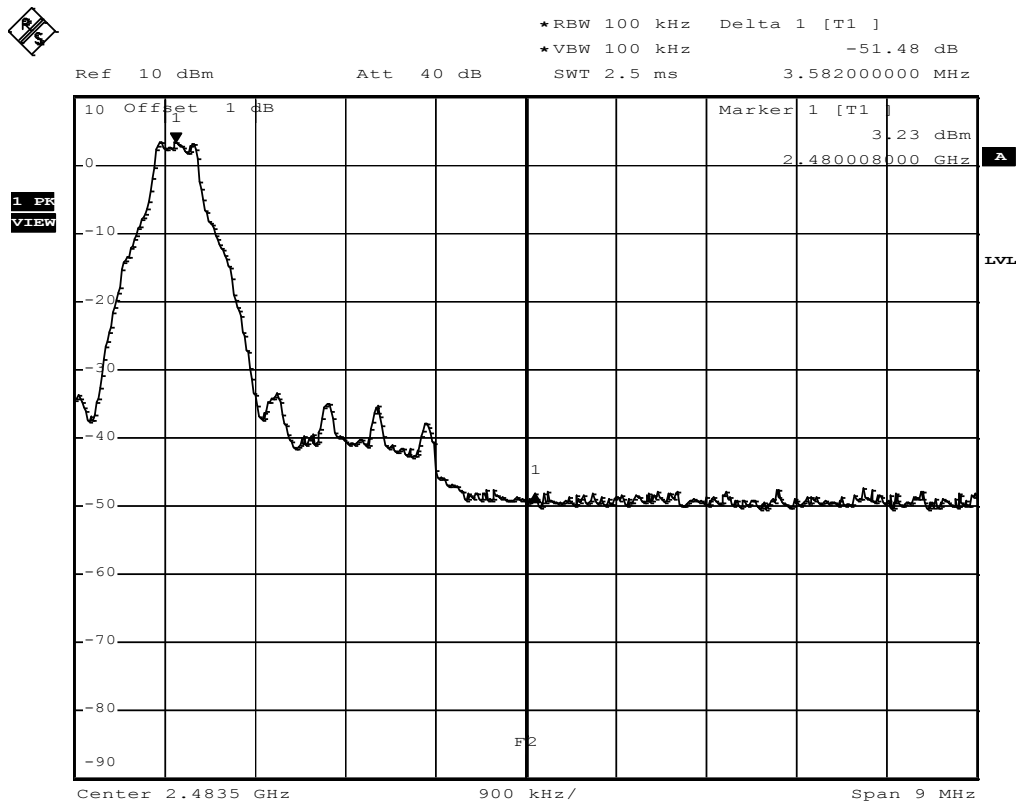


Comment: Limit: Marker Delta value >20 dB; Result: PASS  
 Date: 27.AUG.2013 07:26:29



**Band-edge compliance – DH5-Hop F<sub>LOW</sub>**
**FCC part 15.247**
**Band-edge compliance of RF conducted emissions**


EUT	Bluetooth Speakerphone
Model	HFS210
Approval Holder	GN-Netcon A/S
Temperature / Voltage	tnom
Test Site / Operator	Eurofins / Mr. Treffke
Test Specification	FCC part 15 section 247(c)
Comment 1	Band-edge compliance
Comment 2	Channel.: 0 / 2402 MHz, GFSK
Comment 3	Hopping mode

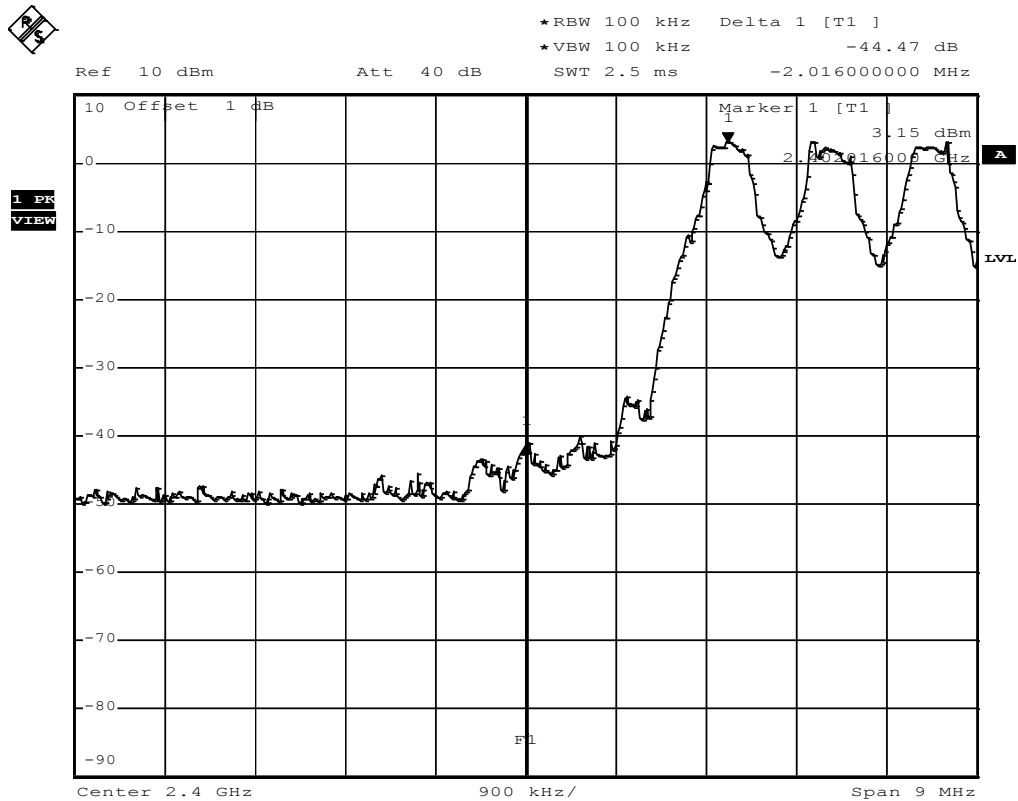

Comment: Limit: Marker Delta value >20 dB; Result: PASS  
 Date: 27.AUG.2013 14:30:06

**Band-edge compliance – DH5-Hop F<sub>HIGH</sub>**
**FCC part 15.247**
**Band-edge compliance of RF conducted emissions**

EUT	Bluetooth Speakerphone
Model	HFS210
Approval Holder	GN-Netcon A/S
Temperature / Voltage	tnom
Test Site / Operator	Eurofins / Mr. Treffke
Test Specification	FCC part 15 section 247(c)
Comment 1	Band-edge compliance
Comment 2	Channel.: 78 / 2480 MHz, GFSK
Comment 3	Hopping mode

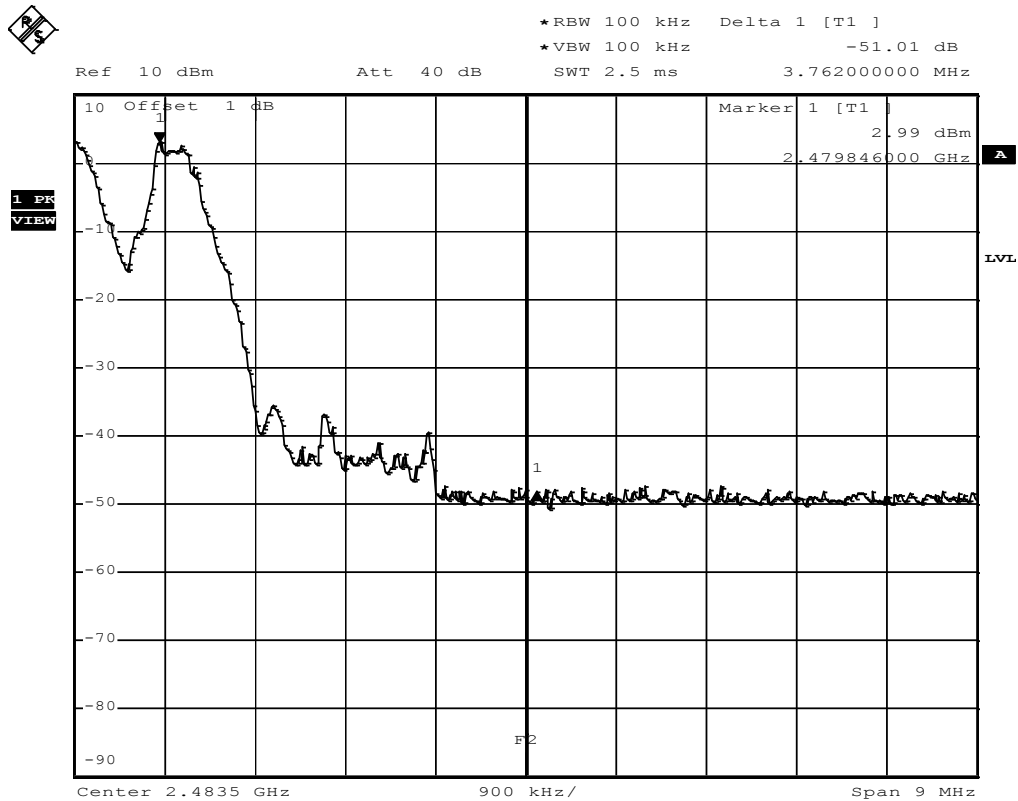


Comment: Limit: Marker Delta value >20 dB; Result: PASS  
 Date: 27.AUG.2013 14:33:13

**Band-edge compliance – 2-DH5-Sngl F<sub>LOW</sub>**
**FCC part 15.247**
**Band-edge compliance of RF conducted emissions**

EUT	Bluetooth Speakerphone
Model	HFS210
Approval Holder	GN-Netcon A/S
Temperature / Voltage	tnom
Test Site / Operator	Eurofins / Mr. Treffke
Test Specification	FCC part 15 section 247(c)
Comment 1	Band-edge compliance
Comment 2	Channel.: 0/ 2402 MHz / Pi/4-DQPSK
Comment 3	Single frequency mode



\*RBW 100 kHz Delta 1 [T1 ]  
 \*VBW 100 kHz -40.64 dB  
 Ref 10 dBm Att 40 dB SWT 2.5 ms -2.340000000 MHz

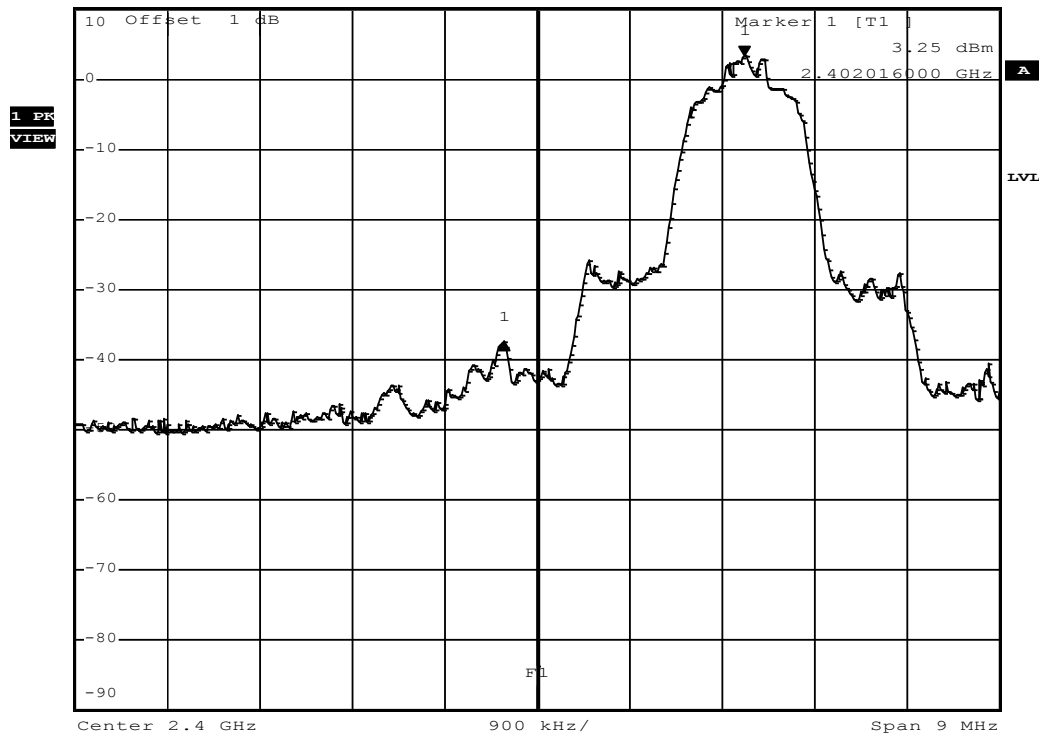


Date: 27.AUG.2013 07:28:20

Band-edge compliance – 2-DH5-Sngl F<sub>HIGH</sub>

FCC part 15.247

Band-edge compliance of RF conducted emissions


EUT	Bluetooth Speakerphone
Model	HFS210
Approval Holder	GN-Netcon A/S
Temperature / Voltage	tnom
Test Site / Operator	Eurofins / Mr. Treffke
Test Specification	FCC part 15 section 247(c)
Comment 1	Band-edge compliance
Comment 2	Channel.: 78/ 2480 MHz / Pi/4-DQPSK
Comment 3	Single frequency mode

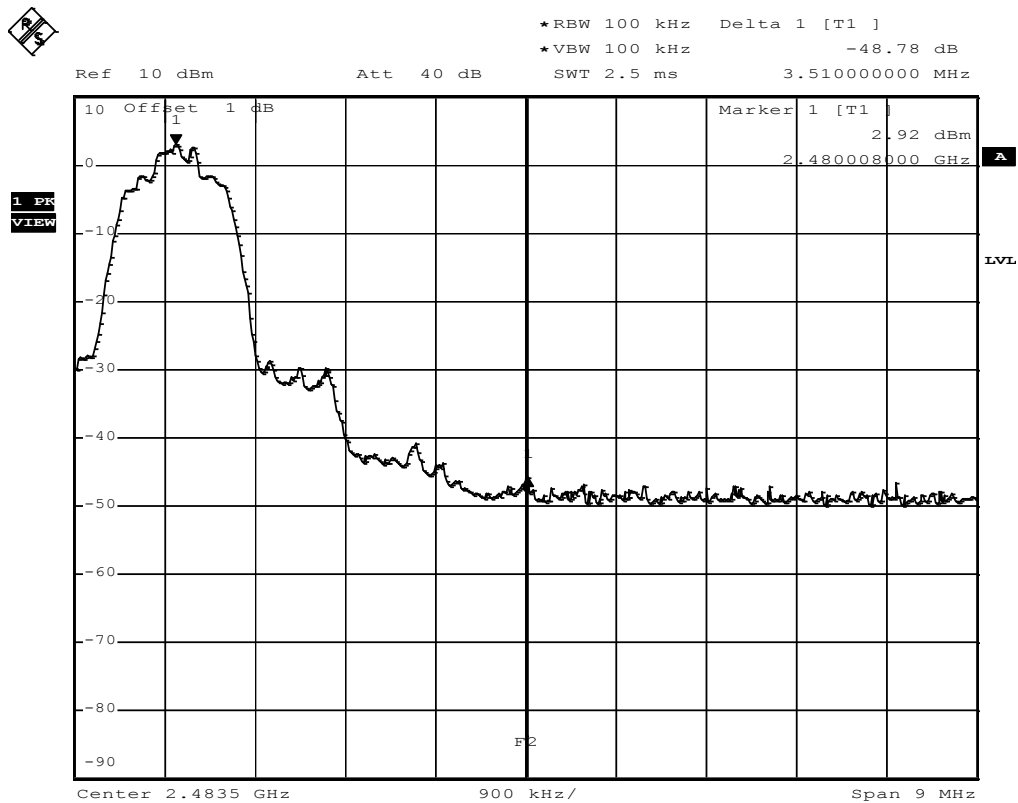

Comment: Limit: Marker Delta value >20 dB; Result: PASS  
Date: 27.AUG.2013 07:30:44

**Band-edge compliance – 2-DH5-Hop F<sub>LOW</sub>**
**FCC part 15.247**
**Band-edge compliance of RF conducted emissions**


EUT	Bluetooth Speakerphone
Model	HFS210
Approval Holder	GN-Netcon A/S
Temperature / Voltage	tnom
Test Site / Operator	Eurofins / Mr. Treffke
Test Specification	FCC part 15 section 247(c)
Comment 1	Band-edge compliance
Comment 2	Channel.: 0 / 2402 MHz, Pi/4-DQPSK
Comment 3	Hopping mode

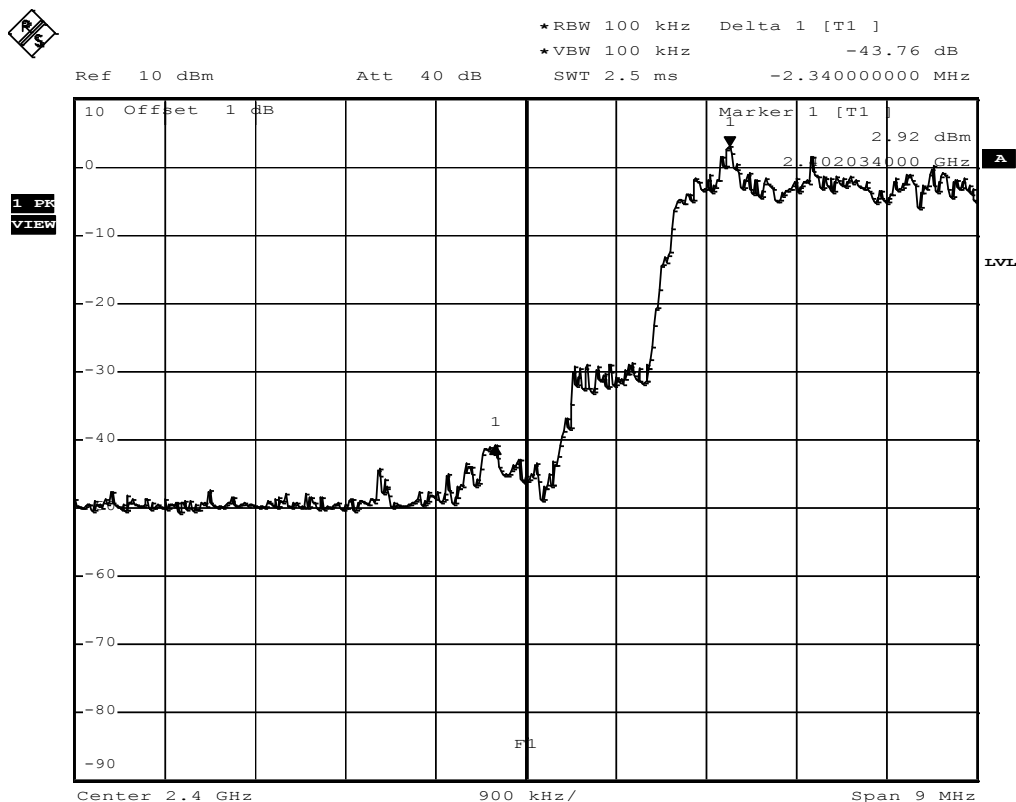

Comment: Limit: Marker Delta value >20 dB; Result: PASS  
 Date: 27.AUG.2013 14:35:18

**Band-edge compliance – 2-DH5-Hop F<sub>HIGH</sub>**
**FCC part 15.247**
**Band-edge compliance of RF conducted emissions**


EUT	Bluetooth Speakerphone
Model	HFS210
Approval Holder	GN-Netcon A/S
Temperature / Voltage	tnom
Test Site / Operator	Eurofins / Mr. Treffke
Test Specification	FCC part 15 section 247(c)
Comment 1	Band-edge compliance
Comment 2	Channel.: 78 / 2480 MHz, Pi/4-DQPSK
Comment 3	Hopping mode

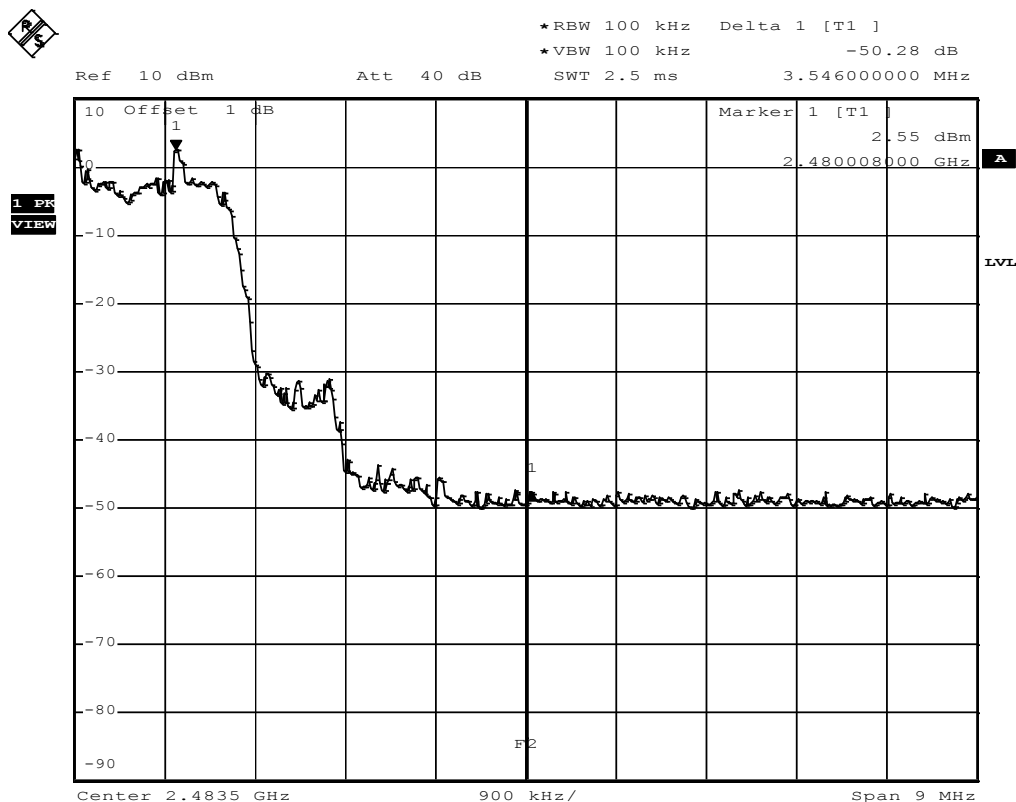

Comment: Limit: Marker Delta value >20 dB; Result: PASS  
 Date: 27.AUG.2013 14:37:26

**Band-edge compliance – 3-DH5-Sngl F<sub>LOW</sub>**
**FCC part 15.247**
**Band-edge compliance of RF conducted emissions**


EUT	Bluetooth Speakerphone
Model	HFS210
Approval Holder	GN-Netcon A/S
Temperature / Voltage	tnom
Test Site / Operator	Eurofins / Mr. Treffke
Test Specification	FCC part 15 section 247(c)
Comment 1	Band-edge compliance
Comment 2	Channel.: 0/ 2402 MHz / 8DPSK
Comment 3	Single frequency mode

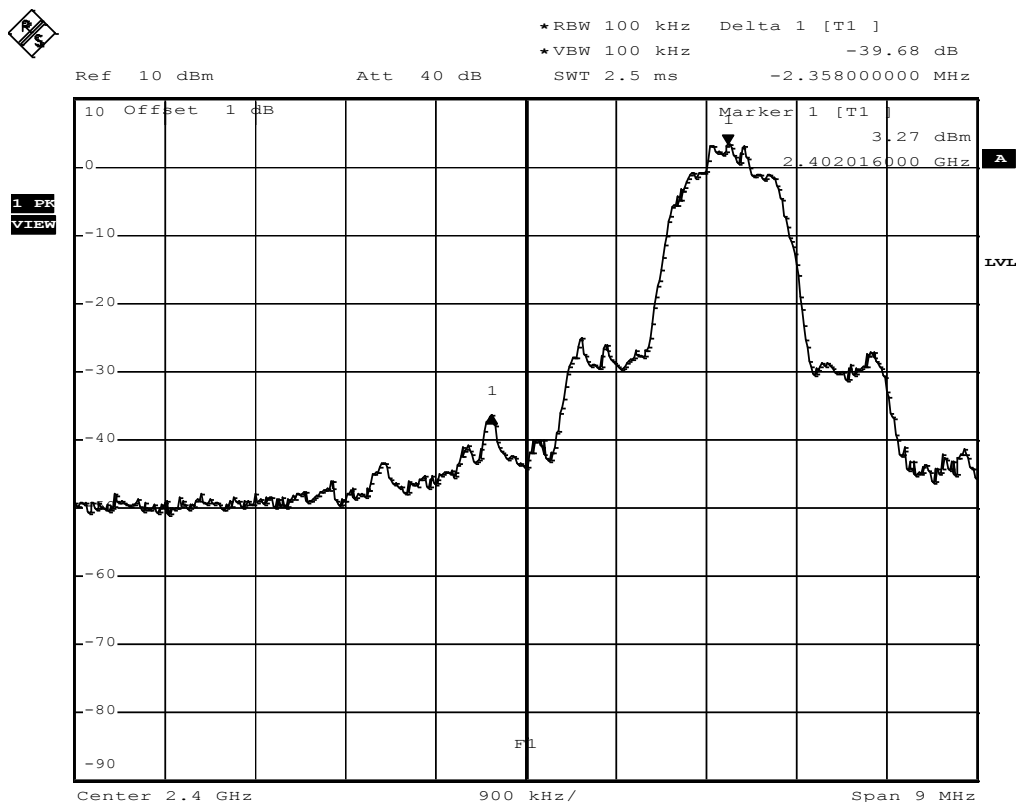

Comment: Limit: Marker Delta value >20 dB; Result: PASS  
 Date: 27.AUG.2013 07:32:21

**Band-edge compliance – 3-DH5-Sngl F<sub>HIGH</sub>**
**FCC part 15.247**
**Band-edge compliance of RF conducted emissions**

EUT	Bluetooth Speakerphone
Model	HFS210
Approval Holder	GN-Netcon A/S
Temperature / Voltage	tnom
Test Site / Operator	Eurofins / Mr. Treffke
Test Specification	FCC part 15 section 247(c)
Comment 1	Band-edge compliance
Comment 2	Channel.: 78/ 2480 MHz / 8DPSK
Comment 3	Single frequency mode

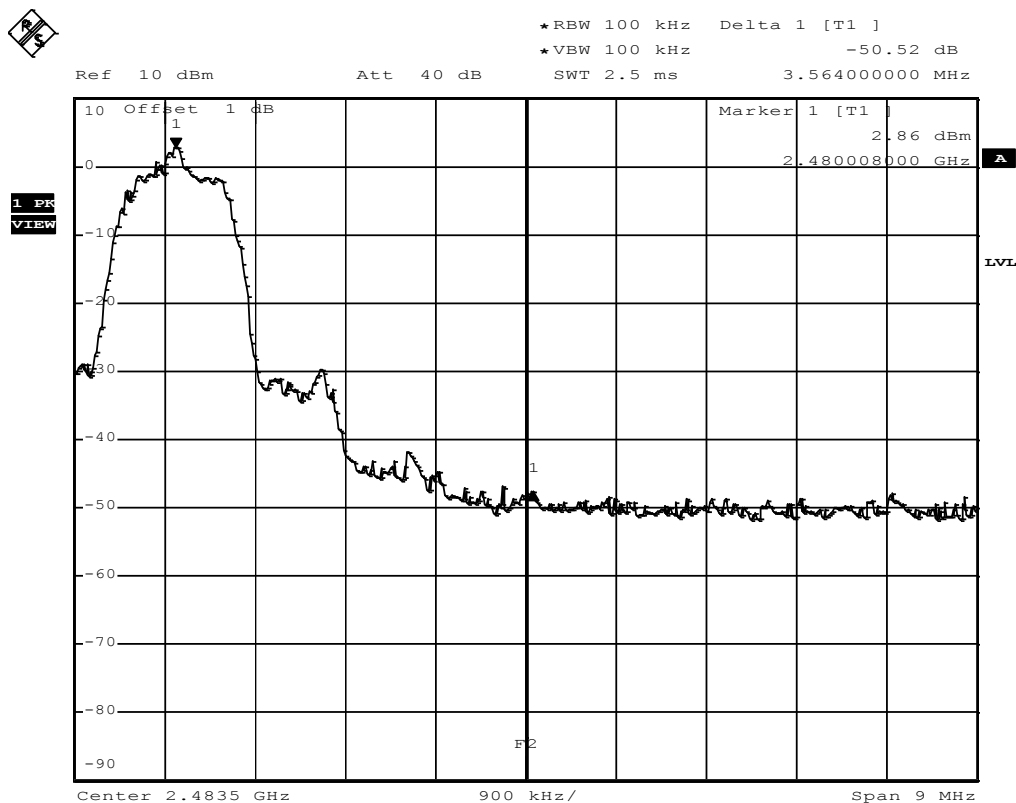


Comment: Limit: Marker Delta value >20 dB; Result: PASS  
 Date: 27.AUG.2013 07:33:47



**Band-edge compliance – 3-DH5-Hop F<sub>LOW</sub>**
**FCC part 15.247**
**Band-edge compliance of RF conducted emissions**

EUT	Bluetooth Speakerphone
Model	HFS210
Approval Holder	GN-Netcon A/S
Temperature / Voltage	tnom
Test Site / Operator	Eurofins / Mr. Treffke
Test Specification	FCC part 15 section 247(c)
Comment 1	Band-edge compliance
Comment 2	Channel.: 0 / 2402 MHz, 8DPSK
Comment 3	Hopping mode

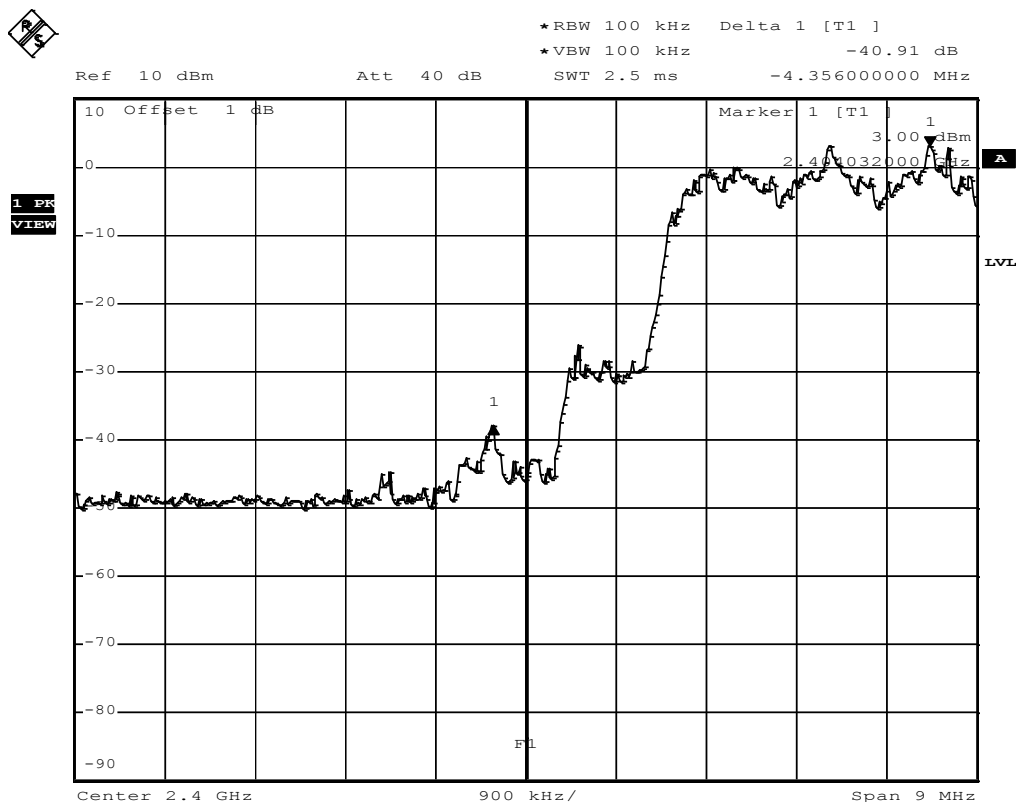


Comment: Limit: Marker Delta value >20 dB; Result: PASS  
 Date: 27.AUG.2013 14:43:02

**Band-edge compliance – 3-DH5-Hop F<sub>HIGH</sub>**
**FCC part 15.247**
**Band-edge compliance of RF conducted emissions**

EUT	Bluetooth Speakerphone
Model	HFS210
Approval Holder	GN-Netcon A/S
Temperature / Voltage	tnom
Test Site / Operator	Eurofins / Mr. Treffke
Test Specification	FCC part 15 section 247(c)
Comment 1	Band-edge compliance
Comment 2	Channel.: 78 / 2480 MHz, 8DPSK
Comment 3	Hopping mode




\*RBW 100 kHz Delta 1 [T1 ]  
 \*VBW 100 kHz -50.23 dB  
 Ref 10 dBm Att 40 dB SWT 2.5 ms 4.320000000 MHz

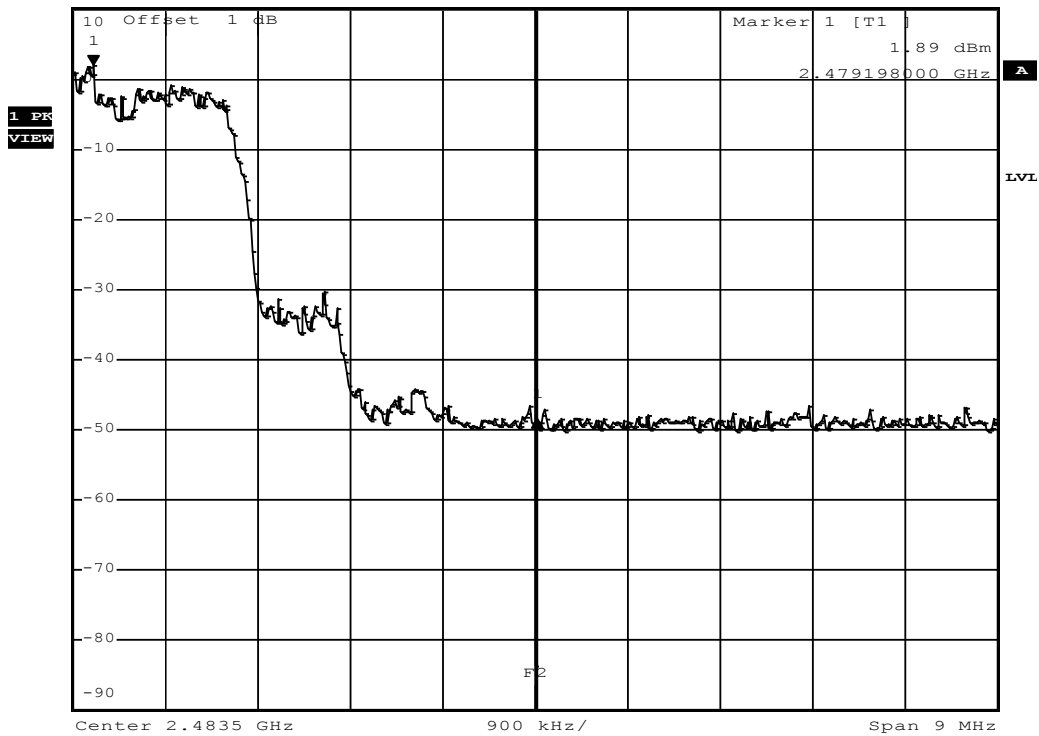



Date: 27.AUG.2013 14:45:10

**3.9 Test Conditions and Results – Conducted spurious emissions**

<b>Conducted spurious emissions acc. FCC 15.247 / IC RSS-210</b>						<b>Verdict: PASS</b>		
EUT requirement rule parts and clause		Reference						
		FCC 15.247(d) / IC RSS-210 A8.5						
Test according to measurement reference		Reference Method						
		FCC Public Notice DA 00-705						
Test frequency range		Tested frequencies						
		10 MHz – 10 <sup>th</sup> Harmonic						
Measurement mode		Peak						
<b>Limits</b>								
Limit				Condition				
≤ -20 dB/100 kHz				Peak power measurement detector = Peak				
≤ -30 dB/100 kHz				Peak power measurement detector = RMS				
<b>Test setup</b>								
								
<b>Test procedure</b>								
<ol style="list-style-type: none"> <li>1. EUT set to test mode (Communication tester is used if needed)</li> <li>2. Span it set according to measurement range</li> <li>3. Resolution bandwidth is set to 100 kHz and detector to peak and max hold</li> <li>4. Markers are set to peak emission levels within frequency band</li> <li>5. Emission level is determined by second marker on emission peak</li> <li>6. Attenuation is determined from level difference</li> </ol>								
<b>Test results</b>								
Channel	Frequency [MHz]	Mode	Emission [MHz]	Emission Level [dbm]	Peak power [dBm]	Limit [dBm]	Margin [dB]	Result
F <sub>LOW</sub>	2402	DH5-Sngl	4805.14	-30.56	1.59	-18.4	-19.99	PASS
F <sub>MID</sub>	2441	DH5-Sngl	4889.02	-32.42	2.04	-18.0	-20.04	PASS
F <sub>HIGH</sub>	2480	DH5-Sngl	4958.92	-41.27	2.42	-17.6	-20.02	PASS
F <sub>LOW</sub>	2402	3DH5-Sngl	4805.14	-41.67	0.11	-19.9	-20.01	PASS
F <sub>MID</sub>	2441	3DH5-Sngl	4889.02	-36.89	0.44	-19.6	-20.04	PASS
F <sub>HIGH</sub>	2480	3DH5-Sngl	--	--	--	--	--	PASS
Comments:								

**Conducted spurious emissions – DH5-Sngl F<sub>Low</sub>**
**FCC part 15.247 (d)  
Spurious Emissions**



EUT	Bluetooth Speakerphone
Model	HFS210
Approval Holder	GN-Netcon A/S
Temperature / Voltage	tnom
Test Site / Operator	Eurofins / Mr. Treffke
Test Specification	FCC part 15.247 (d)
Comment 1	Spurious Emissions conducted
Comment 2	Channel : 2402 MHz
Comment 3	GFSK, DH5

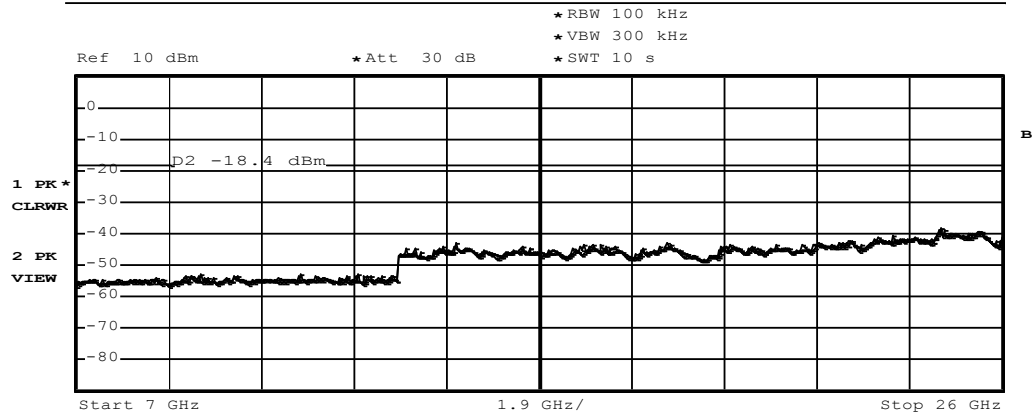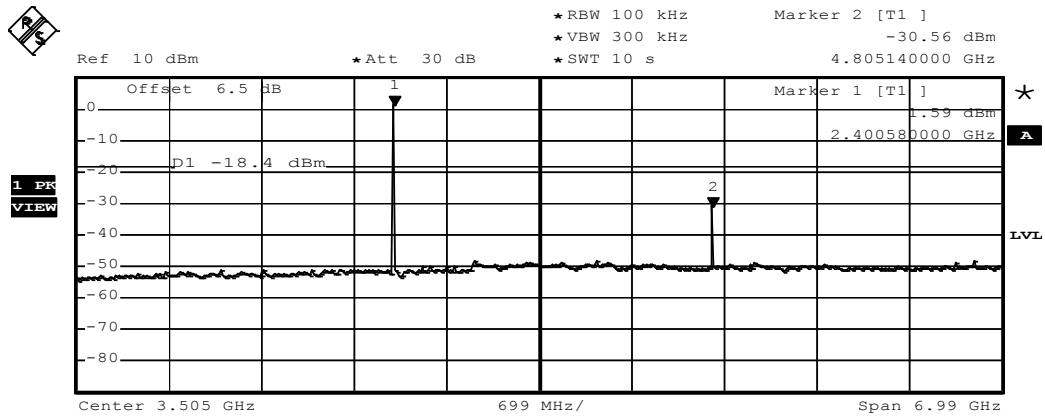

Date: 27.AUG.2013 11:30:40

**Conducted spurious emissions – DH5-Sngl F<sub>MID</sub>**
**FCC part 15.247 (d)  
Spurious Emissions**



EUT	Bluetooth Speakerphone
Model	HFS210
Approval Holder	GN-Netcon A/S
Temperature / Voltage	tnom
Test Site / Operator	Eurofins / Mr. Treffke
Test Specification	FCC part 15.247 (d)
Comment 1	Spurious Emissions conducted
Comment 2	Channel : 2441 MHz
Comment 3	GFSK, DH5

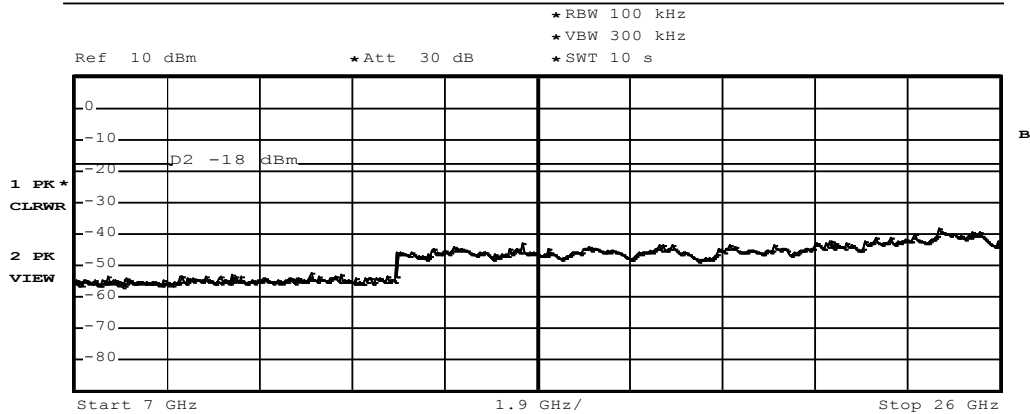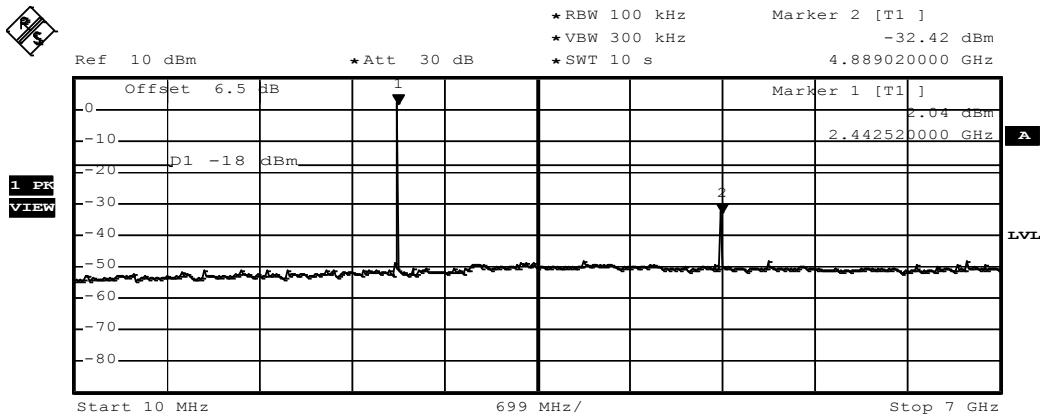

Date: 27.AUG.2013 11:35:19

**Conducted spurious emissions – DH5-Sngl F<sub>HIGH</sub>**
**FCC part 15.247 (d)  
Spurious Emissions**



EUT	Bluetooth Speakerphone
Model	HFS210
Approval Holder	GN-Netcon A/S
Temperature / Voltage	tnom
Test Site / Operator	Eurofins / Mr. Treffke
Test Specification	FCC part 15.247 (d)
Comment 1	Spurious Emissions conducted
Comment 2	Channel : 2480 MHz
Comment 3	GFSK, DH5

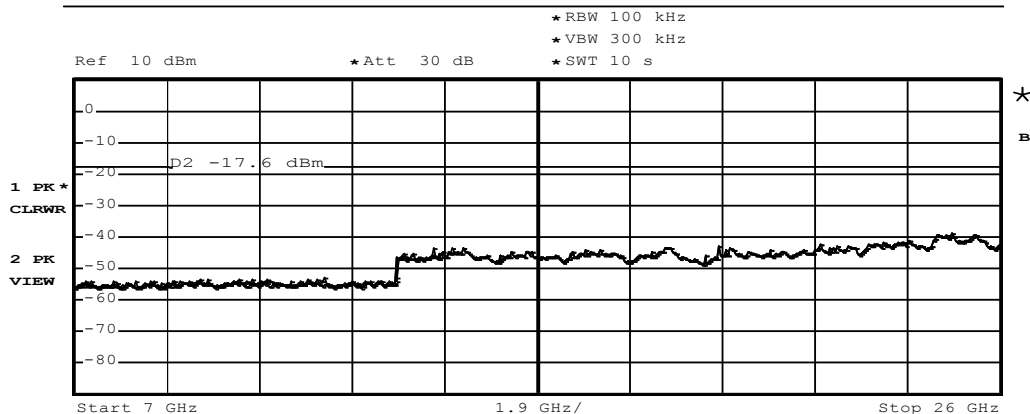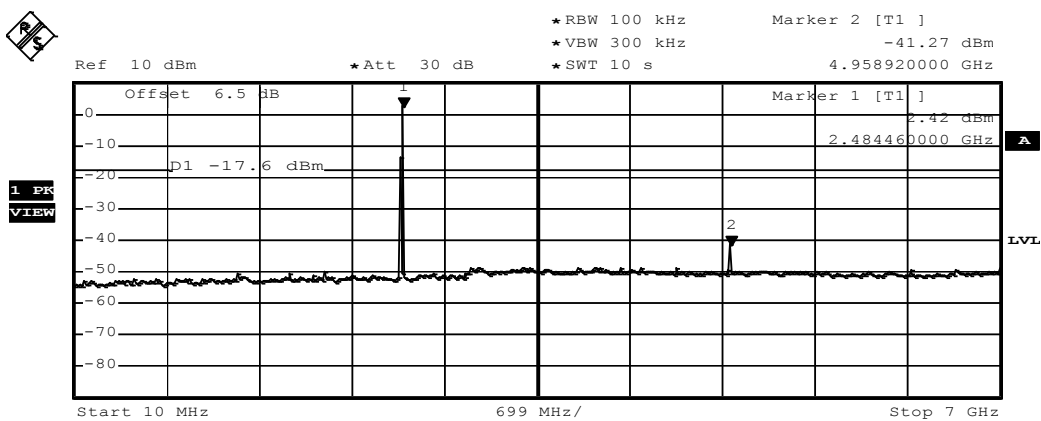

Date: 27.AUG.2013 11:39:16

**Conducted spurious emissions – 3-DH5-Sngl F<sub>Low</sub>**
**FCC part 15.247 (d)  
Spurious Emissions**



EUT	Bluetooth Speakerphone
Model	HFS210
Approval Holder	GN-Netcon A/S
Temperature / Voltage	tnom
Test Site / Operator	Eurofins / Mr. Treffke
Test Specification	FCC part 15.247 (d)
Comment 1	Spurious Emissions conducted
Comment 2	Channel : 2402 MHz
Comment 3	8DPSK, 3DH5

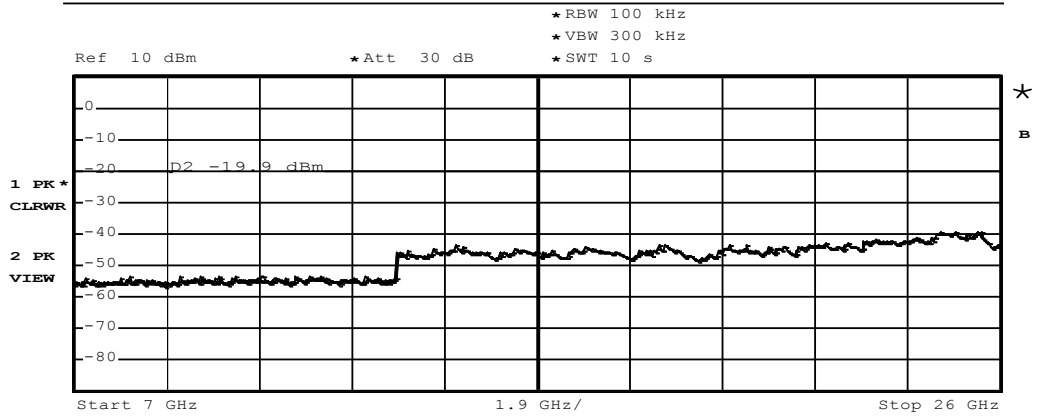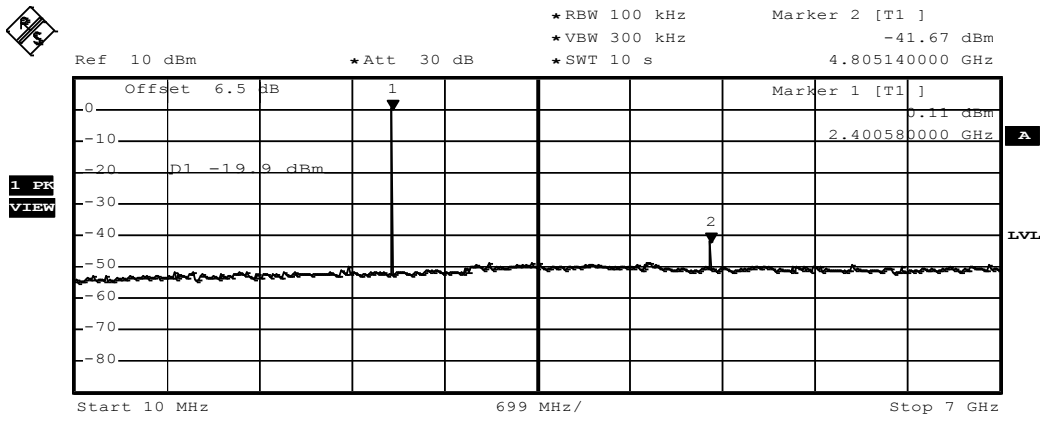

Date: 27.AUG.2013 11:51:12

**Conducted spurious emissions – 3-DH5-Sngl F<sub>MID</sub>**
**FCC part 15.247 (d)  
Spurious Emissions**

EUT	Bluetooth Speakerphone
Model	HFS210
Approval Holder	GN-Netcon A/S
Temperature / Voltage	tnom
Test Site / Operator	Eurofins / Mr. Treffke
Test Specification	FCC part 15.247 (d)
Comment 1	Spurious Emissions conducted
Comment 2	Channel : 2441 MHz
Comment 3	8DPSK, 3DH5

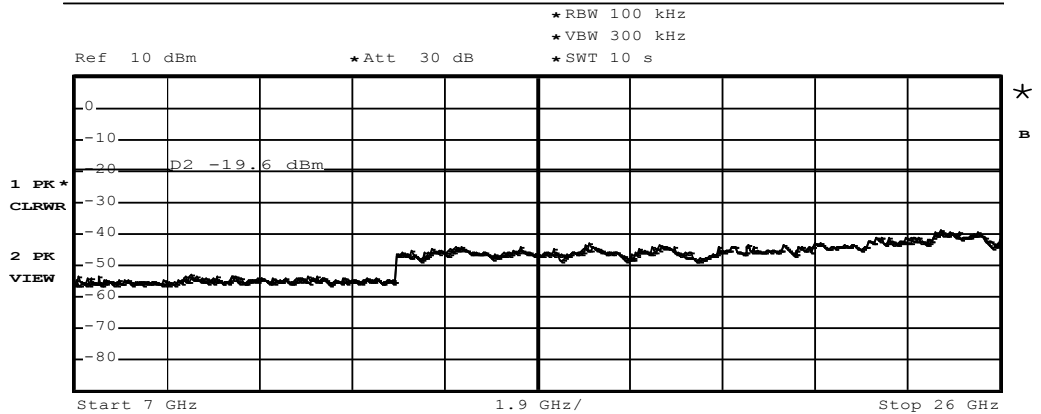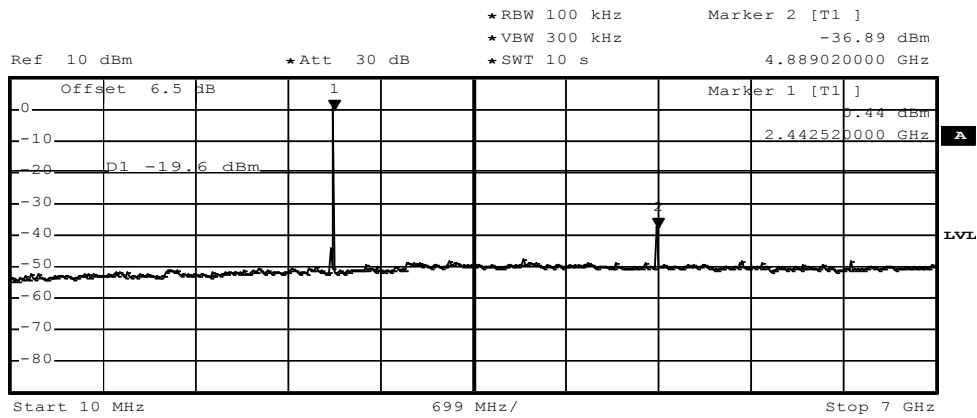



Date: 27.AUG.2013 11:49:37



Conducted spurious emissions – 3-DH5-Sngl F<sub>HIGH</sub>

FCC part 15.247 (d)  
Spurious Emissions

EUT	Bluetooth Speakerphone
Model	HFS210
Approval Holder	GN-Netcon A/S
Temperature / Voltage	tnom
Test Site / Operator	Eurofins / Mr. Treffke
Test Specification	FCC part 15.247 (d)
Comment 1	Spurious Emissions conducted
Comment 2	Channel : 2480 MHz
Comment 3	8DPSK, 3DH5

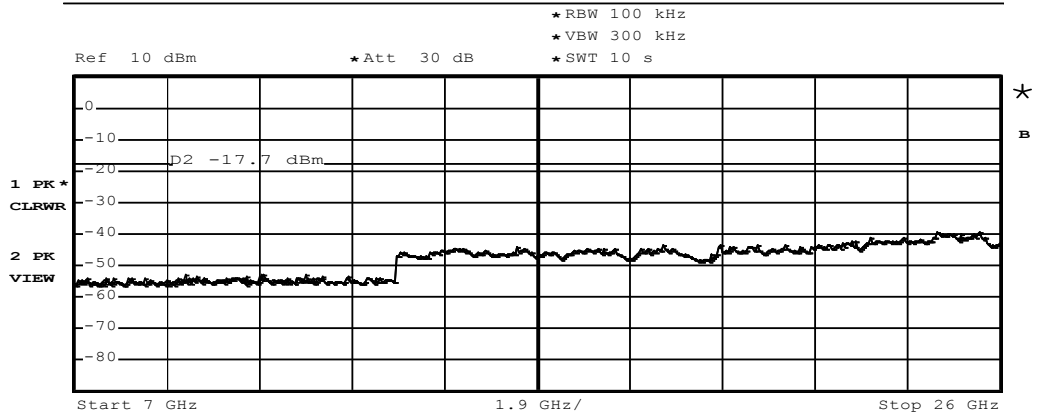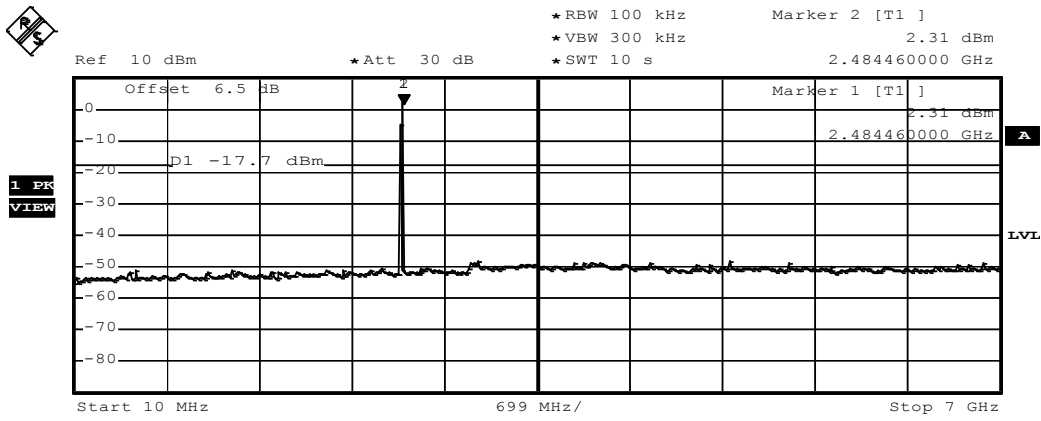

Date: 27.AUG.2013 11:52:38

3.10 Test Conditions and Results – Transmitter radiated emissions


**Transmitter radiated emissions acc. FCC 47 CFR 15.247 / IC RSS-210** **Verdict: PASS**

Test according referenced standards	Reference Method
	FCC 15.247(d) / IC RSS-210 A8.5
Test according to measurement reference	Reference Method
	FCC Public Notice DA 00-705 / ANSI C63.4
Test frequency range	Tested frequencies
	30 MHz – 10 <sup>th</sup> Harmonic

Limits				
Frequency range [MHz]	Detector	Limit [ $\mu$ V/m]	Limit [dB $\mu$ V/m]	Limit Distance [m]
30 – 88	Quasi-Peak	100	40	3
88 – 216	Quasi-Peak	150	43.5	3
216 – 960	Quasi-Peak	200	46	3
960 – 1000	Quasi-Peak	500	54	3
> 1000	Average	500	54	3


Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).  
 When average radiated emission measurements are specified, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

**Test setup**

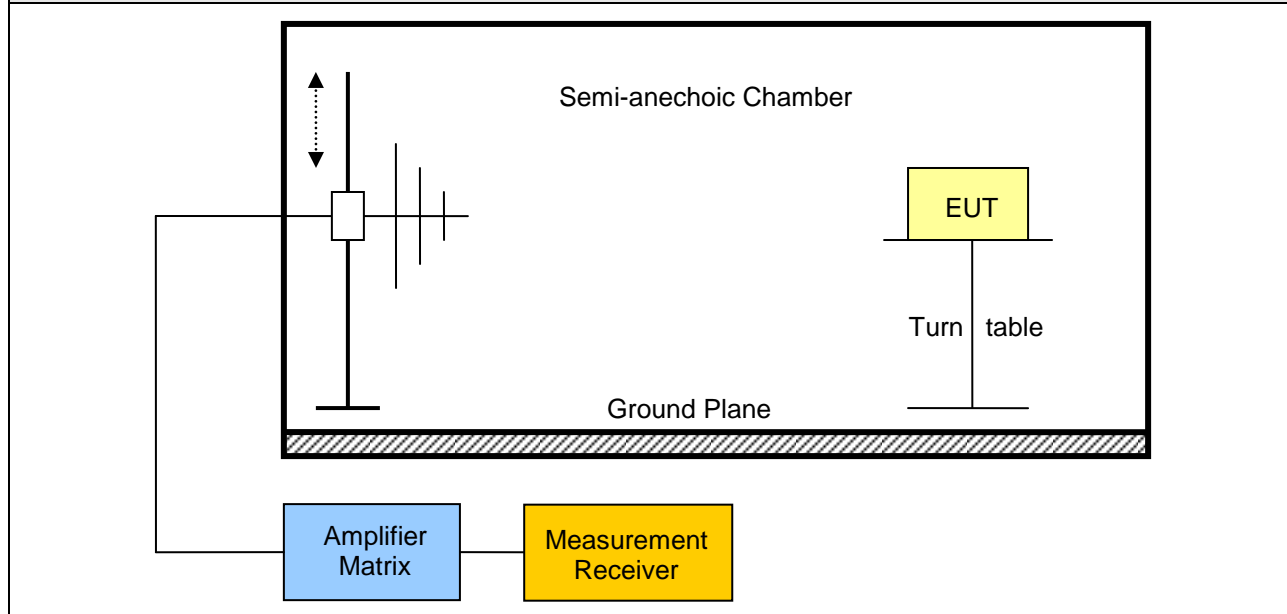

Test procedure									
1. EUT set to test mode (Communication tester is used if needed) 2. Span it set according to measurement range 3. Resolution bandwidth below 1 GHz is set according to CISPR 16 with peak/quasi-peak detector and RBW of 1 MHz with peak/average detector is used above 1 GHz 4. Markers are set to peak emission levels within restricted bands									
Test results									
Channel	Frequency [MHz]	Mode	Emission [MHz]	Level [dB $\mu$ V/m]	Det.	Pol.	Limit [dB $\mu$ V/m]	Limit dist. [m]*	Margin [dB]
F <sub>LOW</sub>	2402	DH5-Sngl	4804	56.79	pk	hor	74.00	3	-17.21
F <sub>LOW</sub>	2402	DH5-Sngl	4804	51.30	avg	hor	54.00	3	-02.70
F <sub>LOW</sub>	2402	DH5-Sngl	4804	57.45	pk	ver	74.00	3	-16.55
F <sub>LOW</sub>	2402	DH5-Sngl	4804	51.58	avg	ver	54.00	3	-02.42
F <sub>MID</sub>	2441	DH5-Sngl	4882	58.05	pk	hor	74.00	3	-15.95
F <sub>MID</sub>	2441	DH5-Sngl	4882	51.24	avg	hor	54.00	3	-02.76
F <sub>MID</sub>	2441	DH5-Sngl	4882	58.09	pk	ver	74.00	3	-15.91
F <sub>MID</sub>	2441	DH5-Sngl	4882	51.48	avg	ver	54.00	3	-02.52
F <sub>HIGH</sub>	2480	DH5-Sngl	4960	60.76	pk	hor	74.00	3	-13.24
F <sub>HIGH</sub>	2480	DH5-Sngl	4960	53.21	avg	hor	54.00	3	-00.79
F <sub>HIGH</sub>	2480	DH5-Sngl	4960	60.60	pk	ver	74.00	3	-13.40
F <sub>HIGH</sub>	2480	DH5-Sngl	4960	53.23	avg	ver	54.00	3	-00.77
Comments: * Physical distance between EUT and measurement antenna.									

**3.11 Test Conditions and Results – Receiver radiated emissions**

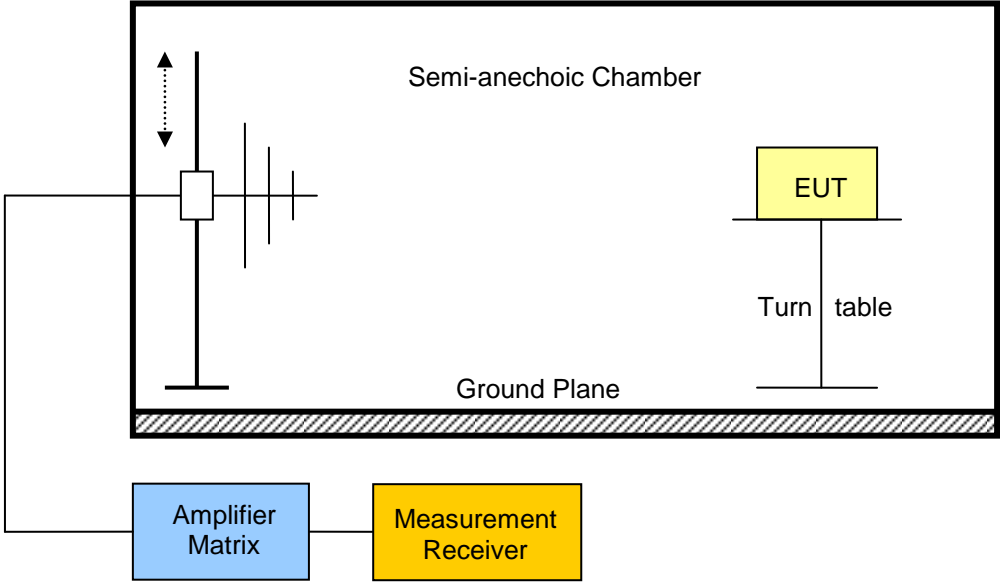Receiver radiated emissions acc. IC RSS-210			Verdict: PASS	
Test according referenced standards	Reference Method			
	IC RSS-210 A8.5			
Test according to measurement reference	Reference Method			
	ANSI C63.4			
Test frequency range	Tested frequencies			
	30 MHz – 3 <sup>th</sup> Harmonic			
EUT test mode	Receive			
Limits				
Frequency range [MHz]	Detector	Limit [ $\mu\text{V}/\text{m}$ ]	Limit [ $\text{dB}\mu\text{V}/\text{m}$ ]	Limit Distance [m]
30 – 88	Quasi-Peak	100	40	3
88 – 216	Quasi-Peak	150	43.5	3
216 – 960	Quasi-Peak	200	46	3
960 – 1000	Quasi-Peak	500	54	3
> 1000	Average	500	54	3
Test setup				
				

**Test procedure**

1. EUT set to receive mode (Communication tester is used if needed)
2. Span it set according to measurement range
3. Resolution bandwidth below 1 GHz is set according to CISPR 16 with peak/quasi-peak detector and RBW of 1 MHz with peak/average detector is used above 1 GHz
4. Markers are set to peak emission levels

**Test results**

Channel	Frequency [MHz]	Emission [MHz]	Emission Level [dB $\mu$ V/m]	Emission Level [ $\mu$ V/m]	Det.	Limit [ $\mu$ V/m]	Margin [ $\mu$ V/m]
F <sub>MID</sub>	2441	291.2	25.01	17.80	pk	200	-182.20
F <sub>MID</sub>	2441	323.2	28.25	25.85	pk	200	-174.15
F <sub>MID</sub>	2441	1648	38.88	87.90	pk	500	-412.10

Comments:


\* Physical distance between EUT and measurement antenna.

**Transmitter radiated spurious emissions**
**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer:	GN Netcom A/S
EUT Name:	Bluetooth Speakerphone
Model:	HFS210
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7V lithium, USB charging
Antenna:	Rohde & Schwarz HK 116, Horizontal
Measurement distance:	3 m
Mode:	TX; 2402 MHz; GFSK; DH5
Test Date:	2013-09-10
Note:	worst case

Index 69

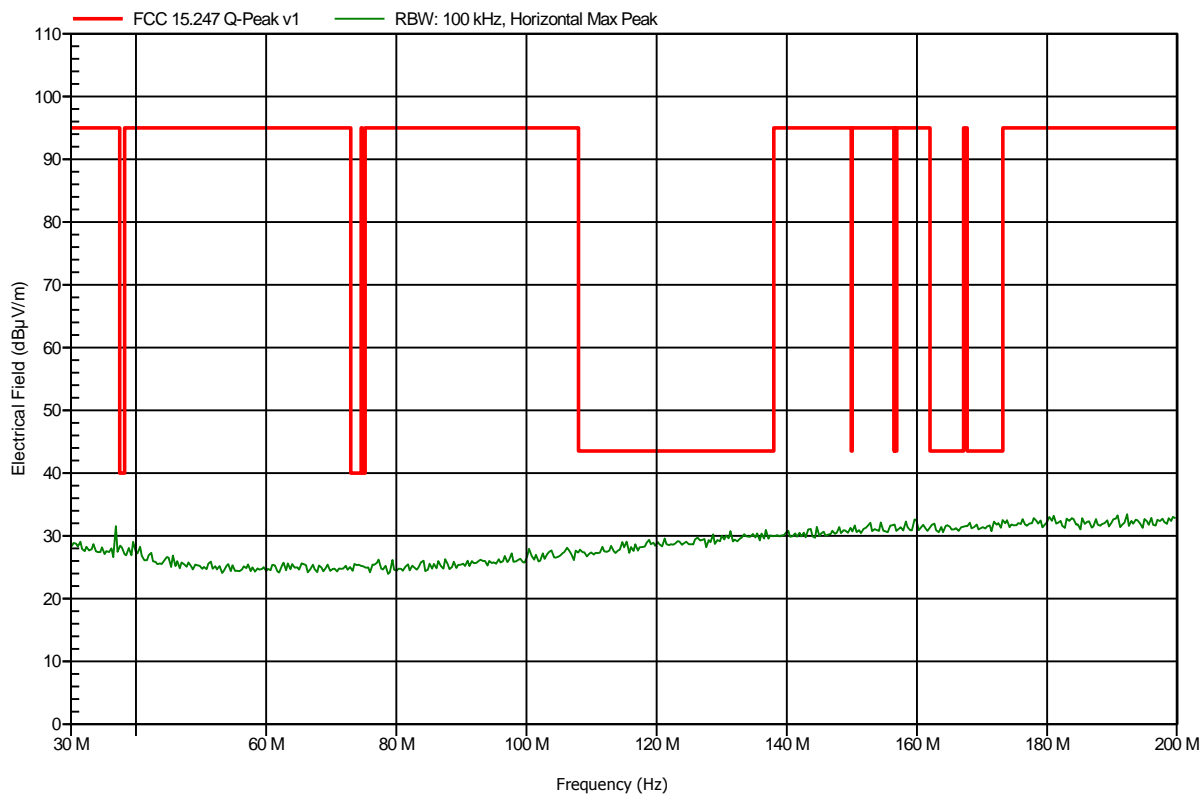


**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer:	GN Netcom A/S
EUT Name:	Bluetooth Speakerphone
Model:	HFS210
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7V lithium, USB charging
Antenna:	Rohde & Schwarz HK 116, Vertical
Measurement distance:	3 m
Mode:	TX; 2402 MHz; GFSK; DH5
Test Date:	2013-09-10
Note:	worst case

Index 68

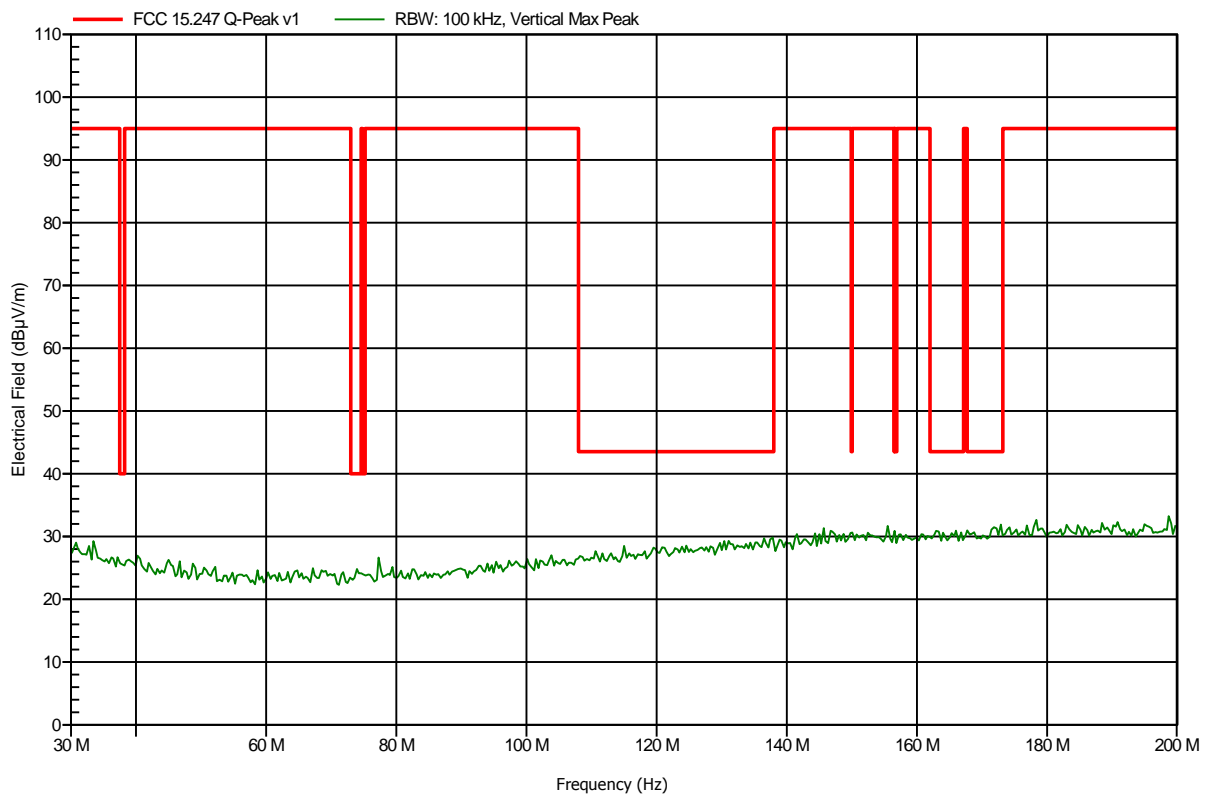


**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer:	GN Netcom A/S
EUT Name:	Bluetooth Speakerphone
Model:	HFS210
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7V lithium, USB charging
Antenna:	Rohde & Schwarz HL 223, Horizontal
Measurement distance:	3 m
Mode:	TX; 2402 MHz; GFSK; DH5
Test Date:	2013-09-10
Note:	worst case

Index 70

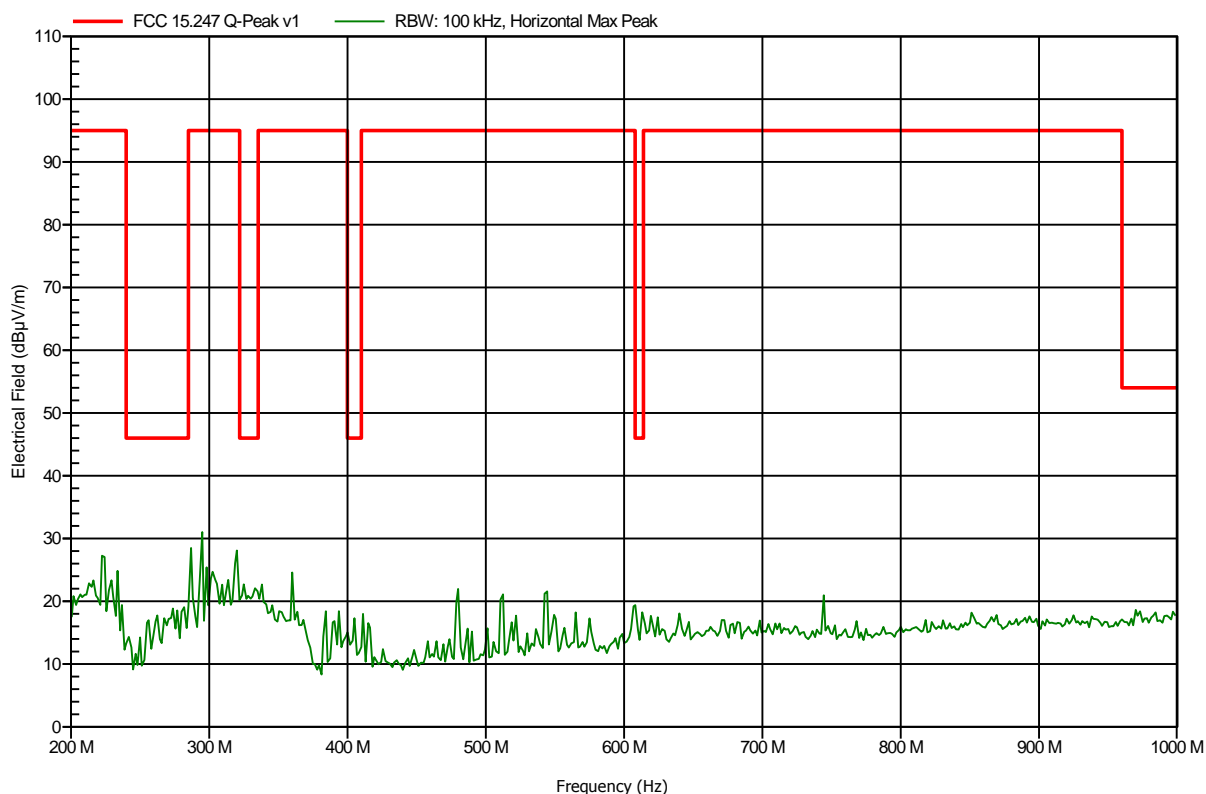




**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer:	GN Netcom A/S
EUT Name:	Bluetooth Speakerphone
Model:	HFS210
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7V lithium, USB charging
Antenna:	Rohde & Schwarz HL 223, Vertical
Measurement distance:	3 m
Mode:	TX; 2402 MHz; GFSK; DH5
Test Date:	2013-09-10
Note:	worst case

Index 71

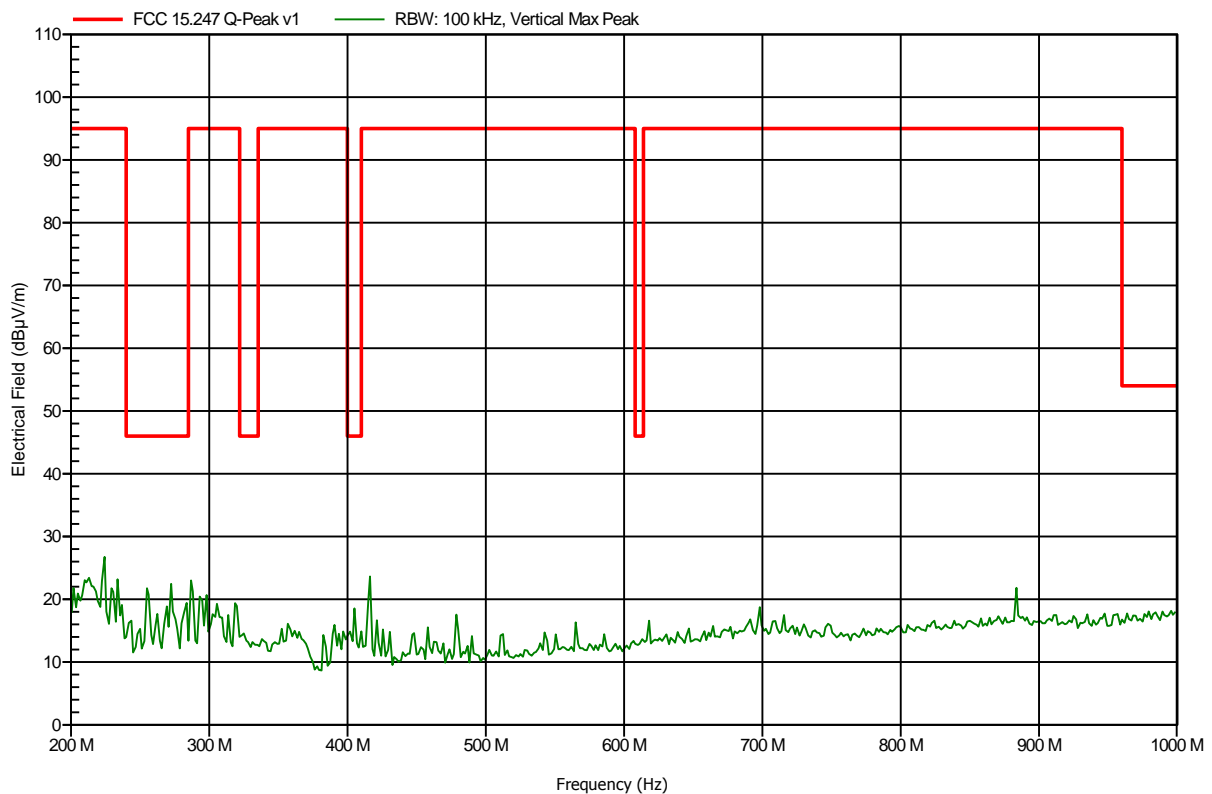


**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer: GN Netcom A/S  
 EUT Name: Bluetooth Speakerphone  
 Model: HFS210  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.7V lithium, USB charging  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; 2402 MHz; GFSK; DH5  
 Test Date: 2013-09-10  
 Note:

Index 23

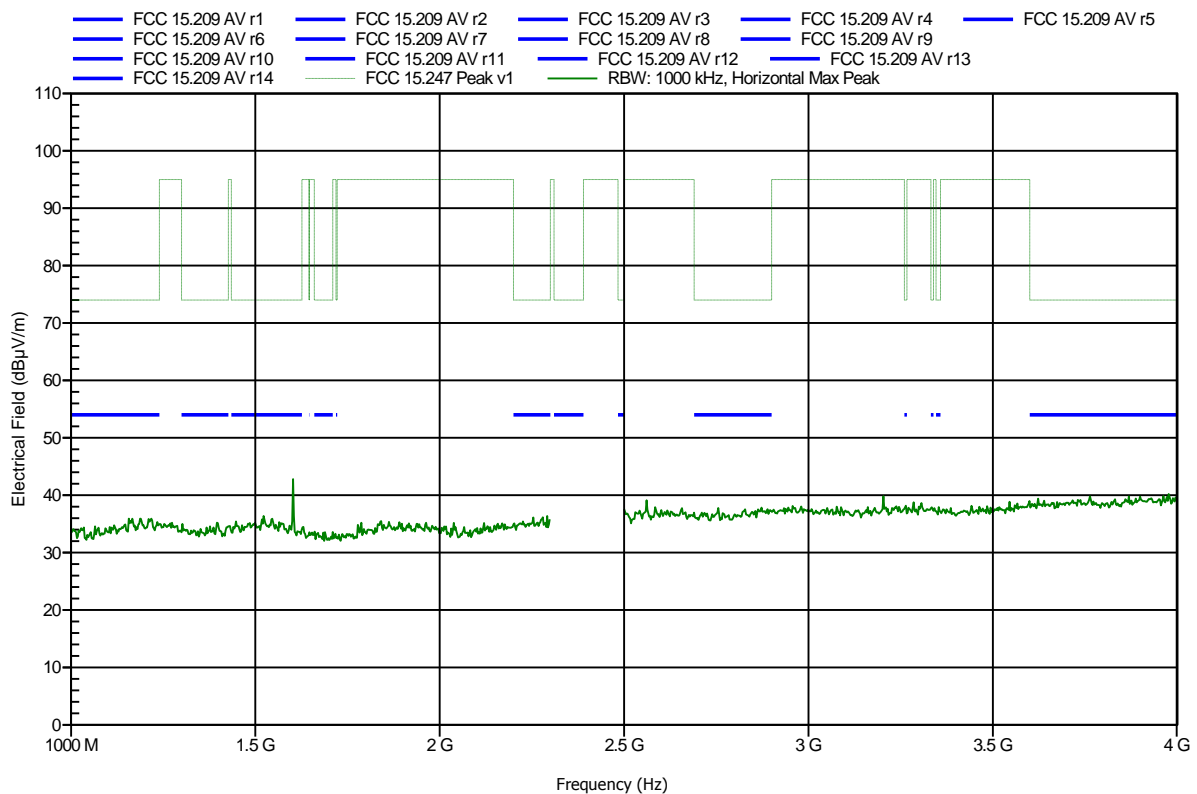


**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer: GN Netcom A/S  
 EUT Name: Bluetooth Speakerphone  
 Model: HFS210  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.7V lithium, USB charging  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 3 m  
 Mode: TX; 2402 MHz; GFSK; DH5  
 Test Date: 2013-09-10  
 Note:

Index 26

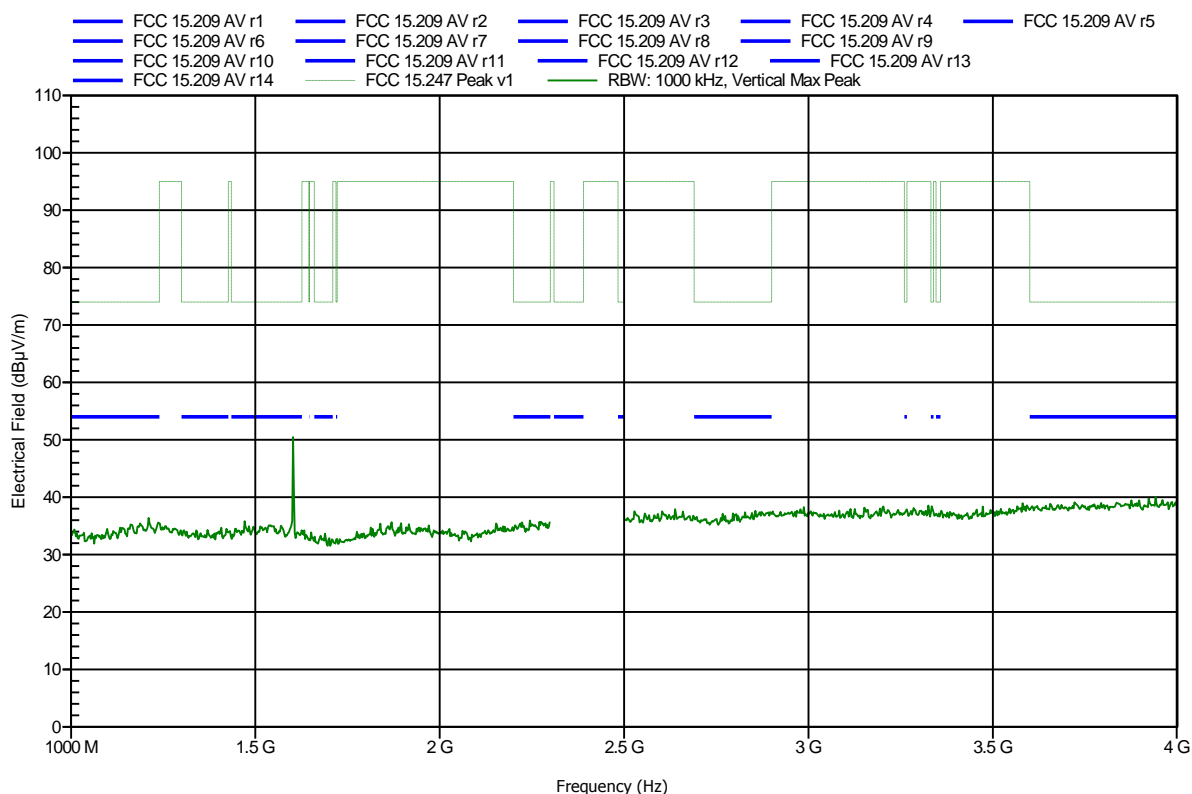


**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer:	GN Netcom A/S
EUT Name:	Bluetooth Speakerphone
Model:	HFS210
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7V lithium, USB charging
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	3 m
Mode:	TX; 2402 MHz; GFSK; DH5
Test Date:	2013-09-10
Note:	lower bandedge

Index 24

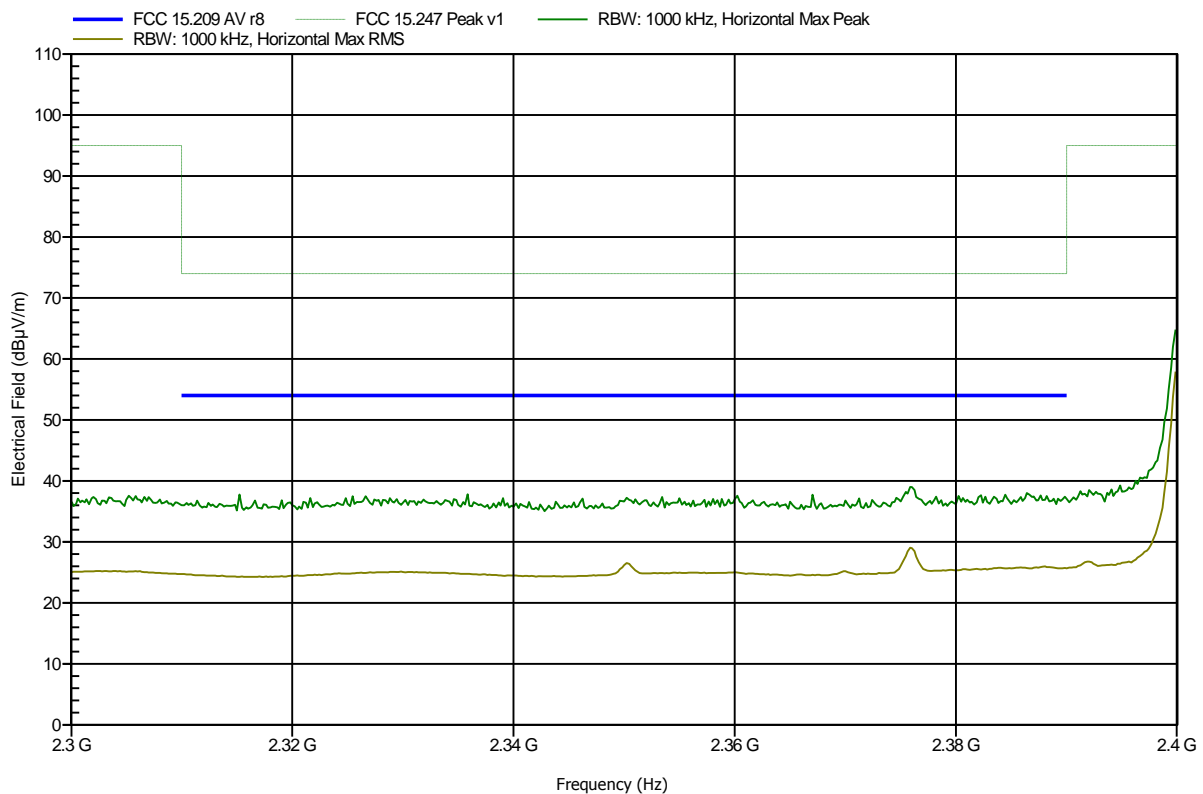


**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer:	GN Netcom A/S
EUT Name:	Bluetooth Speakerphone
Model:	HFS210
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7V lithium, USB charging
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	3 m
Mode:	TX; 2402 MHz; GFSK; DH5
Test Date:	2013-09-10
Note:	lower bandedge

Index 27

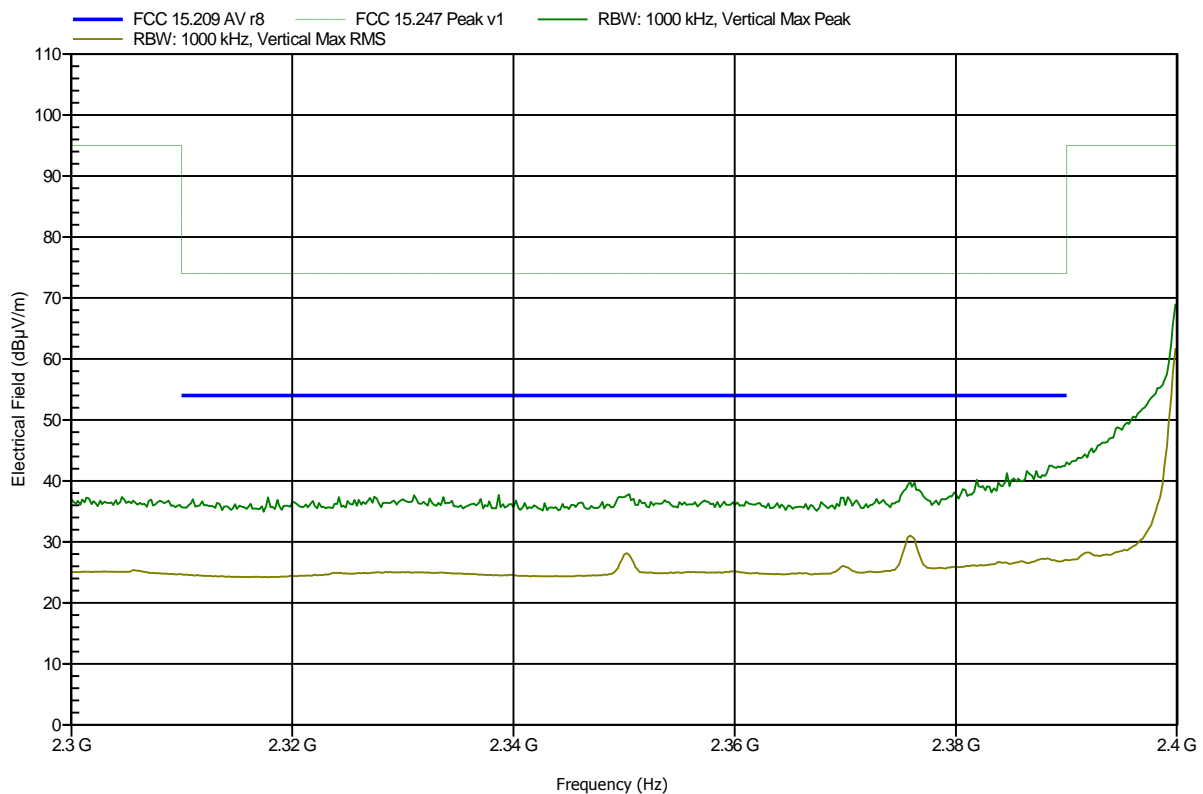


**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer: GN Netcom A/S  
 EUT Name: Bluetooth Speakerphone  
 Model: HFS210  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.7V lithium, USB charging  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; 2402 MHz; GFSK; DH5  
 Test Date: 2013-09-10  
 Note:

Index 25

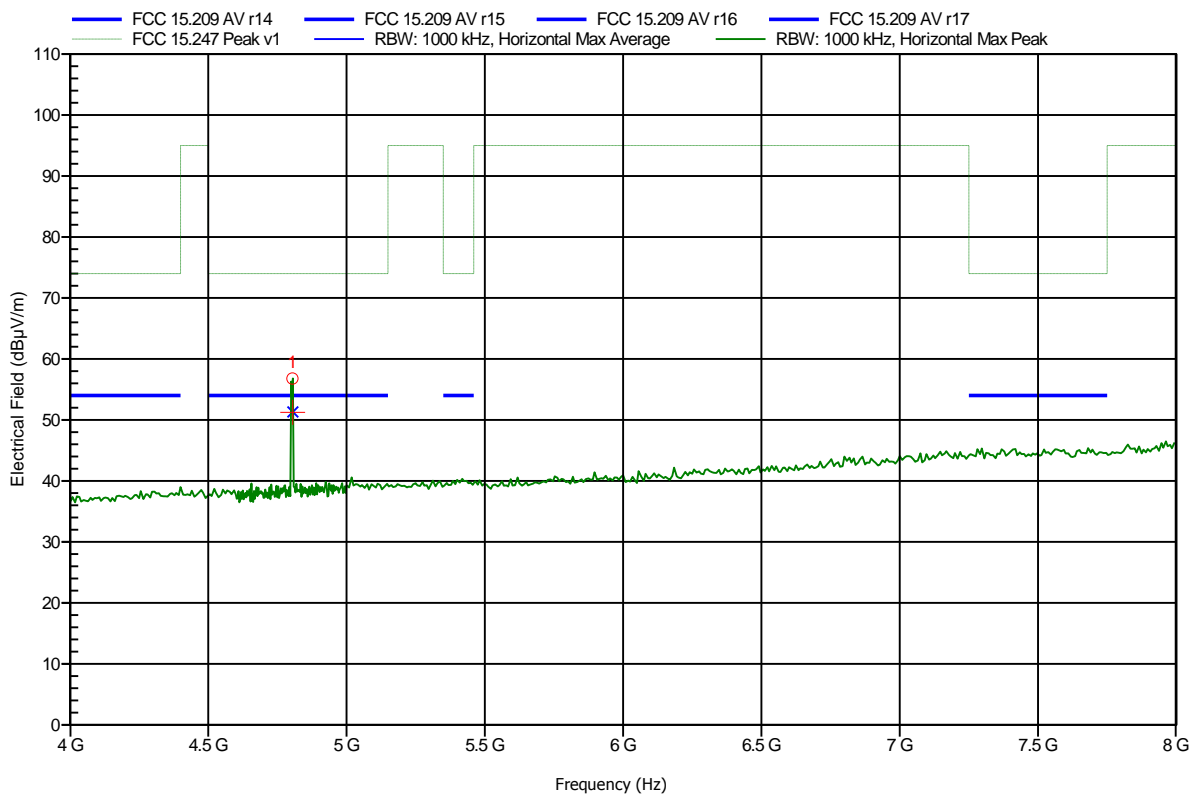

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.804 GHz	56.79 dBµV/m	74 dBµV/m	-17.21 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
4.804 GHz	51.3 dBµV/m	54 dBµV/m	-2.7 dB	Pass

**Test Report No.: G0M-1308-3134-TFC247B-V01**


 Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer: GN Netcom A/S  
 EUT Name: Bluetooth Speakerphone  
 Model: HFS210  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.7V lithium, USB charging  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 3 m  
 Mode: TX; 2402 MHz; GFSK; DH5  
 Test Date: 2013-09-10  
 Note:

Index 28

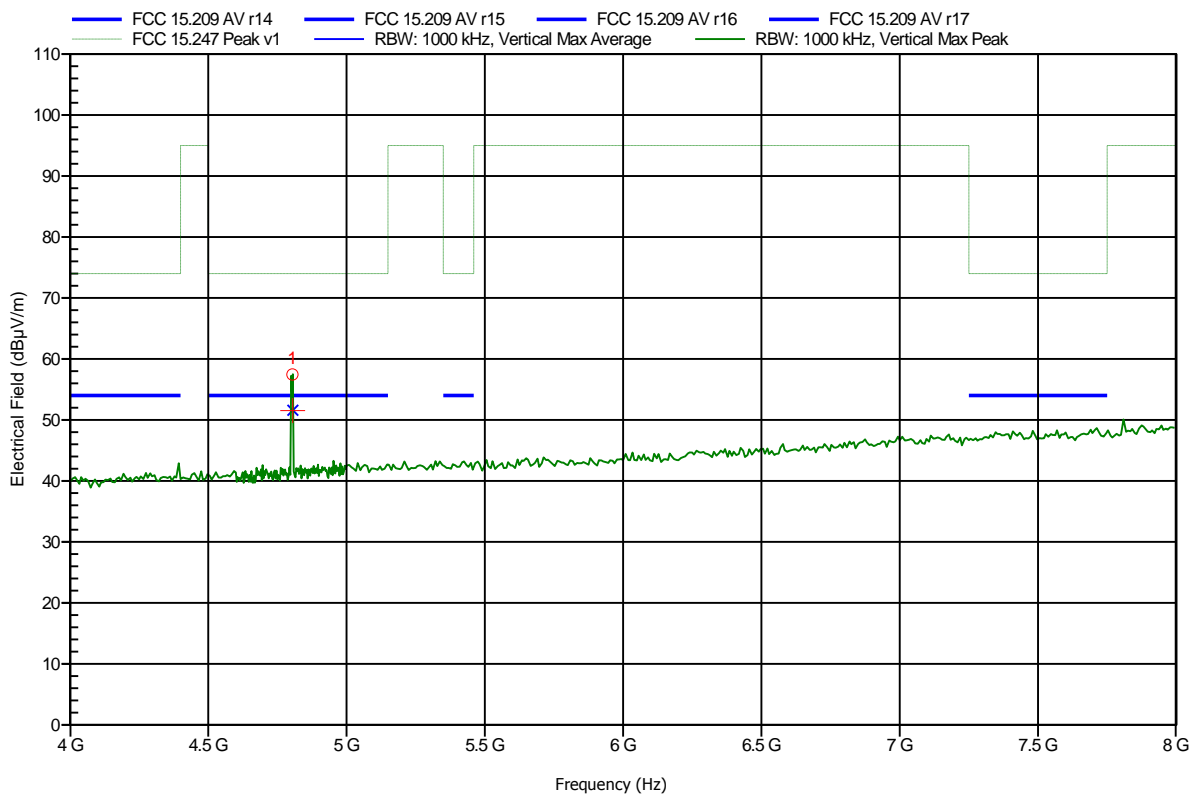


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.804 GHz	57.45 dBµV/m	74 dBµV/m	-16.55 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
4.804 GHz	51.58 dBµV/m	54 dBµV/m	-2.42 dB	Pass

**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer: GN Netcom A/S  
 EUT Name: Bluetooth Speakerphone  
 Model: HFS210  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.7V lithium, USB charging  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 100 cm converted to 3m  
 Mode: TX; 2402 MHz; GFSK; DH5  
 Test Date: 2013-09-10  
 Note:

Index 39

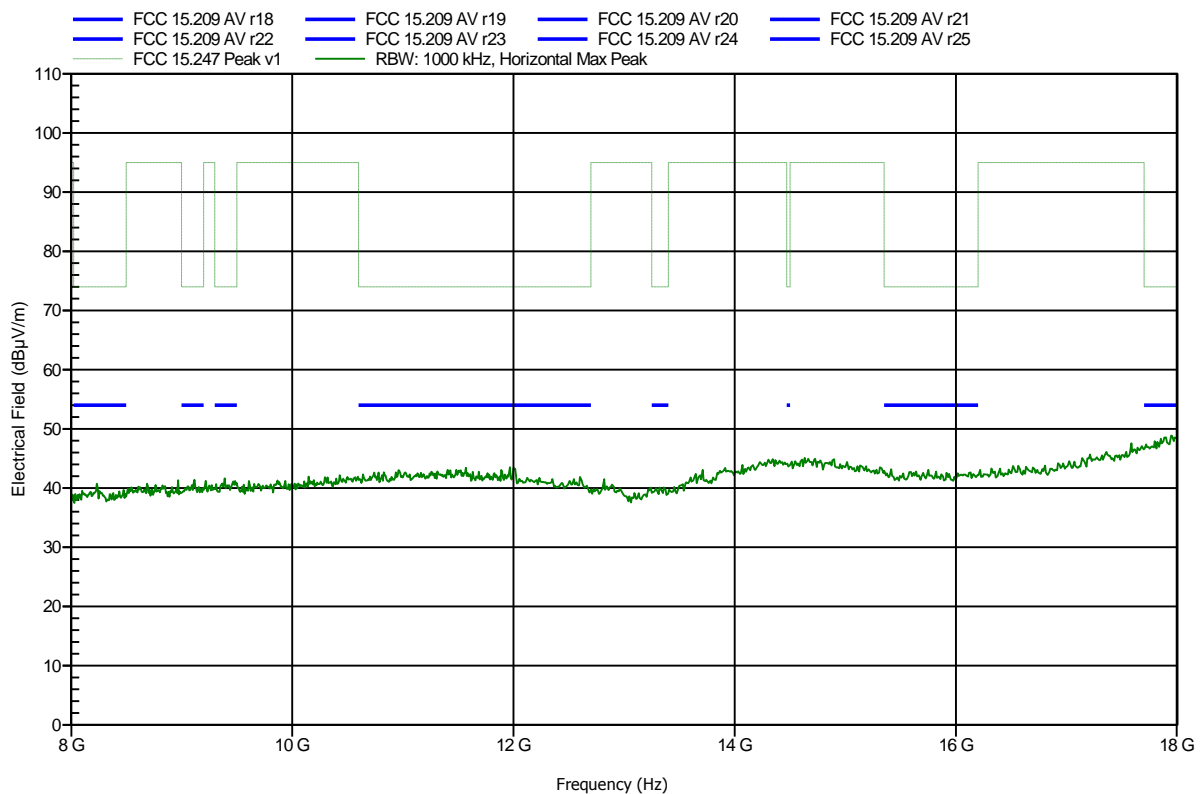




**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer: GN Netcom A/S  
 EUT Name: Bluetooth Speakerphone  
 Model: HFS210  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.7V lithium, USB charging  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 100 cm converted to 3m  
 Mode: TX; 2402 MHz; GFSK; DH5  
 Test Date: 2013-09-10  
 Note:

Index 41

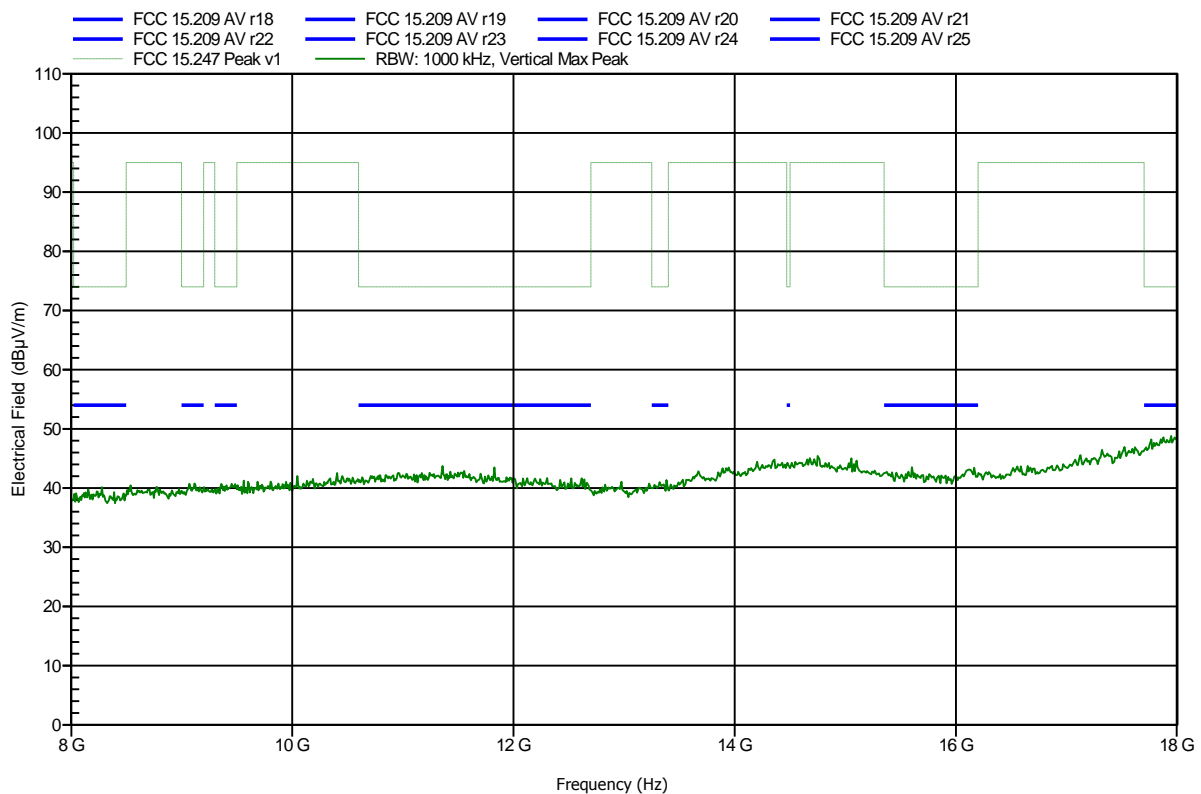


**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer: GN Netcom A/S  
 EUT Name: Bluetooth Speakerphone  
 Model: HFS210  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.7V lithium, USB charging  
 Antenna: Rohde & Schwarz HL 025, Horizontal  
 Measurement distance: 100 cm  
 Mode: TX; 2402 MHz; GFSK; DH5  
 Test Date: 2013-09-10  
 Note:

Index 40

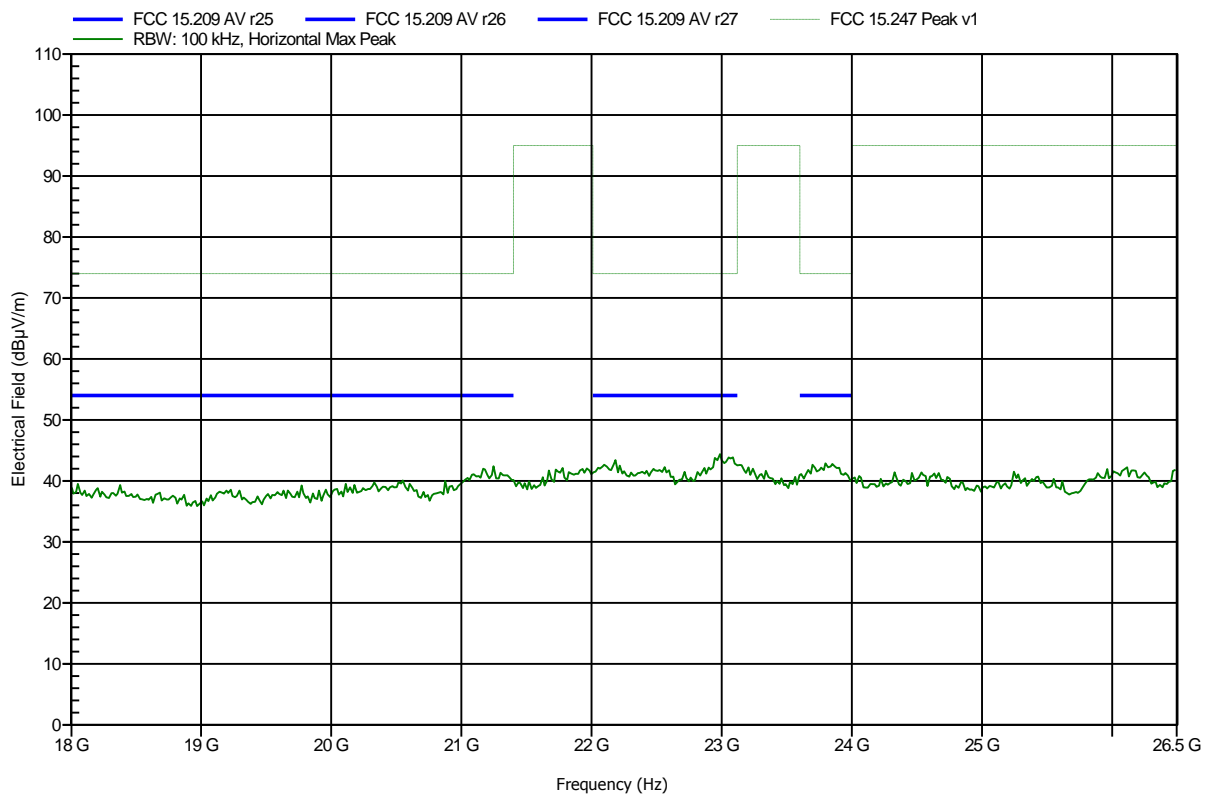


**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer:	GN Netcom A/S
EUT Name:	Bluetooth Speakerphone
Model:	HFS210
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7V lithium, USB charging
Antenna:	Rohde & Schwarz HL 025, Vertical
Measurement distance:	100 cm
Mode:	TX; 2402 MHz; GFSK; DH5
Test Date:	2013-09-10
Note:	

Index 42

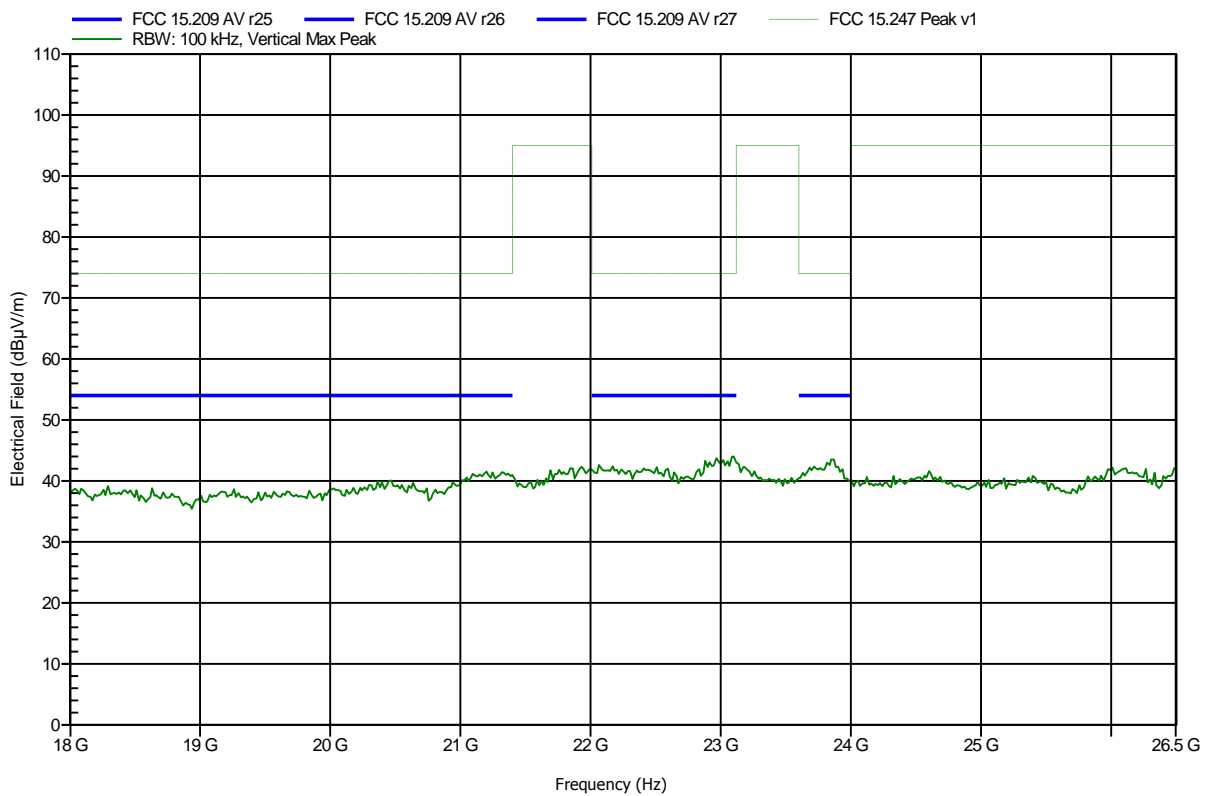


**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer: GN Netcom A/S  
 EUT Name: Bluetooth Speakerphone  
 Model: HFS210  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.7V lithium, USB charging  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; 2441 MHz; GFSK; DH5  
 Test Date: 2013-09-10  
 Note:

Index 29

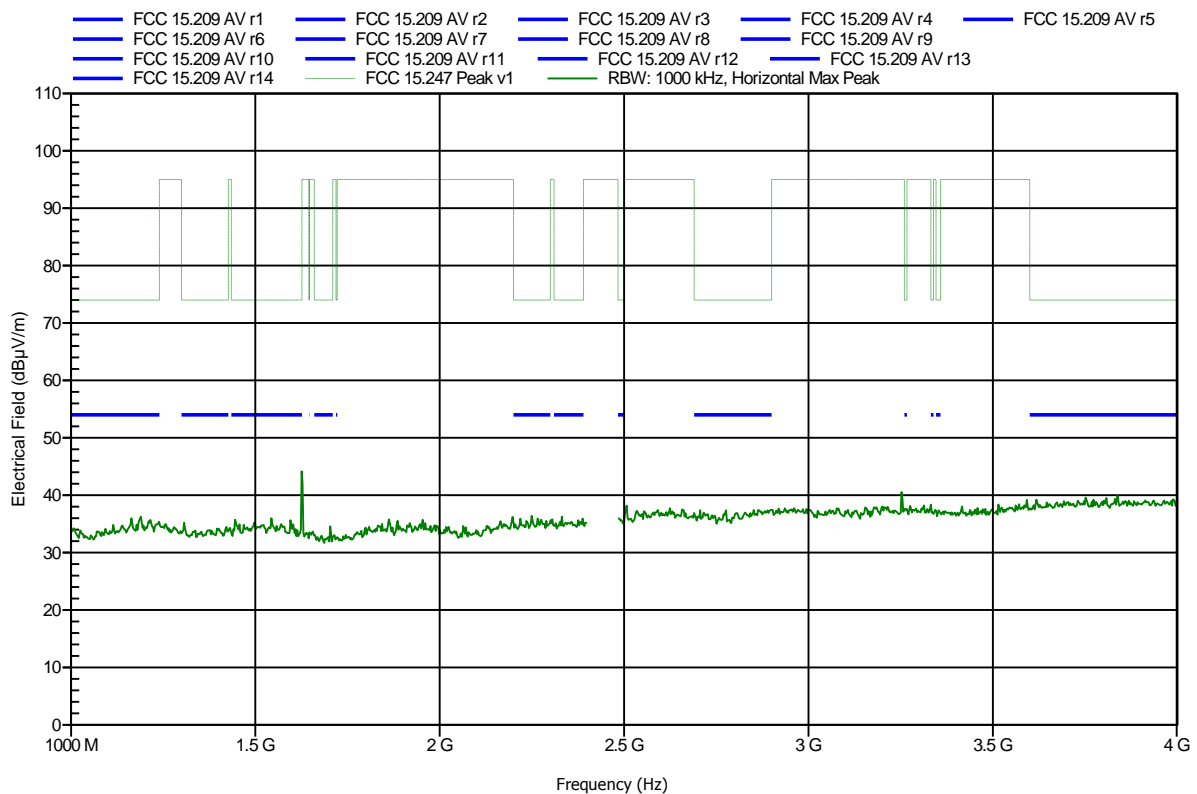


**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer: GN Netcom A/S  
 EUT Name: Bluetooth Speakerphone  
 Model: HFS210  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.7V lithium, USB charging  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 3 m  
 Mode: TX; 2441 MHz; GFSK; DH5  
 Test Date: 2013-09-10  
 Note:

Index 31

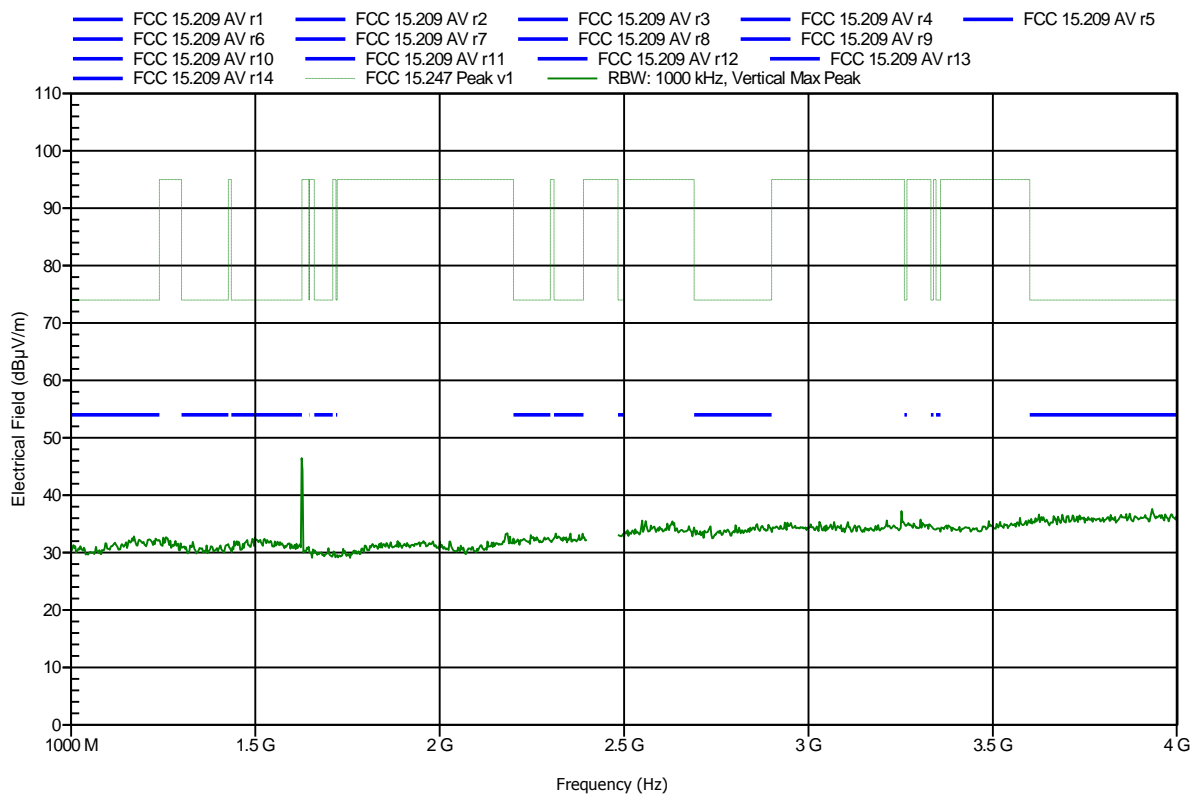


**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer: GN Netcom A/S  
 EUT Name: Bluetooth Speakerphone  
 Model: HFS210  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.7V lithium, USB charging  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; 2441 MHz; GFSK; DH5  
 Test Date: 2013-09-10  
 Note:

Index 30

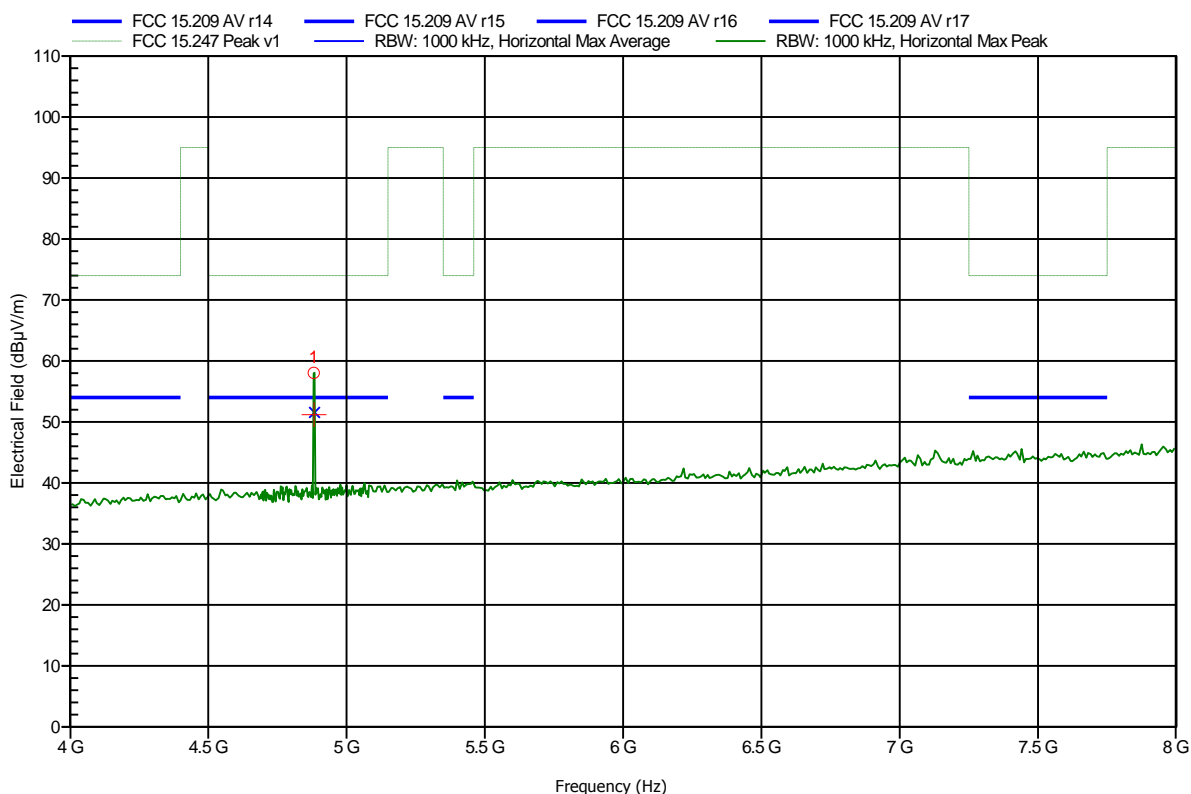


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.882 GHz	58.05 dBµV/m	74 dBµV/m	-15.95 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
4.882 GHz	51.24 dBµV/m	54 dBµV/m	-2.76 dB	Pass

**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer: GN Netcom A/S  
 EUT Name: Bluetooth Speakerphone  
 Model: HFS210  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.7V lithium, USB charging  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 3 m  
 Mode: TX; 2441 MHz; GFSK; DH5  
 Test Date: 2013-09-10  
 Note:

Index 32

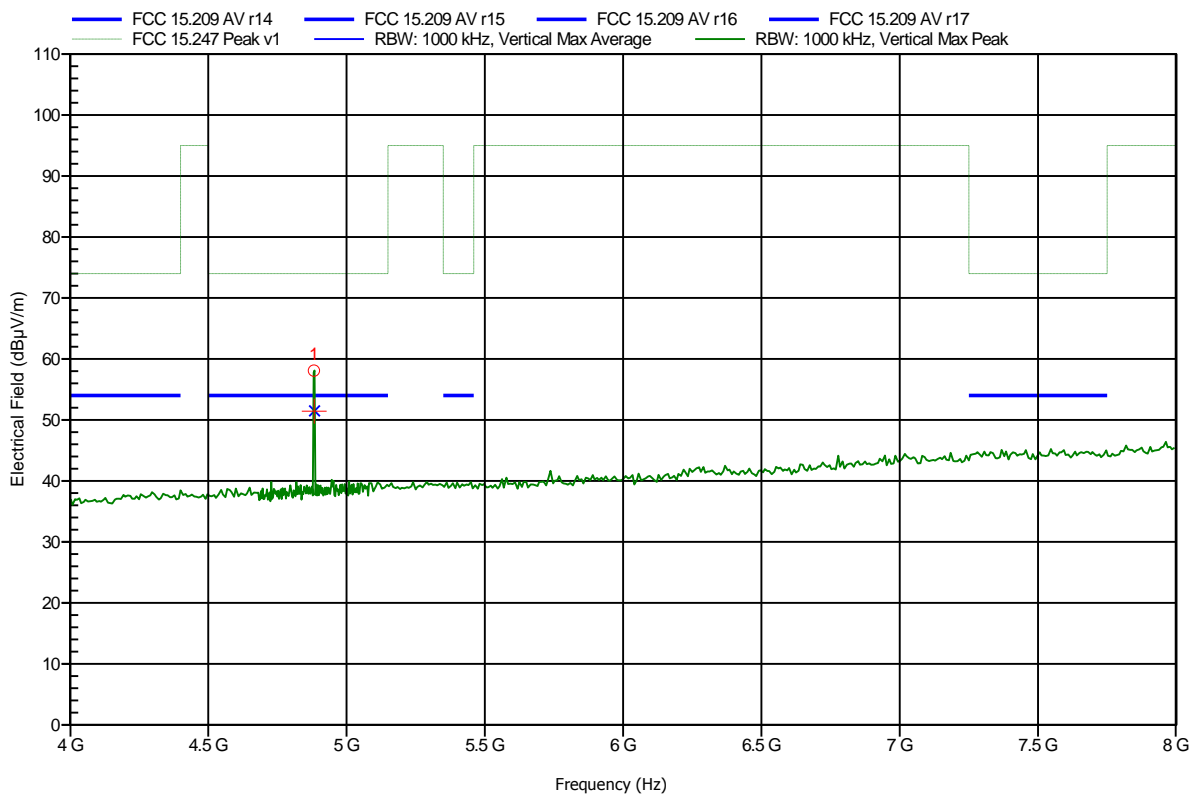


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.882 GHz	58.09 dBµV/m	74 dBµV/m	-15.91 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
4.882 GHz	51.48 dBµV/m	54 dBµV/m	-2.52 dB	Pass

**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer: GN Netcom A/S  
 EUT Name: Bluetooth Speakerphone  
 Model: HFS210  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.7V lithium, USB charging  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 100 cm converted to 3m  
 Mode: TX; 2441 MHz; GFSK; DH5  
 Test Date: 2013-09-10  
 Note:

Index 43

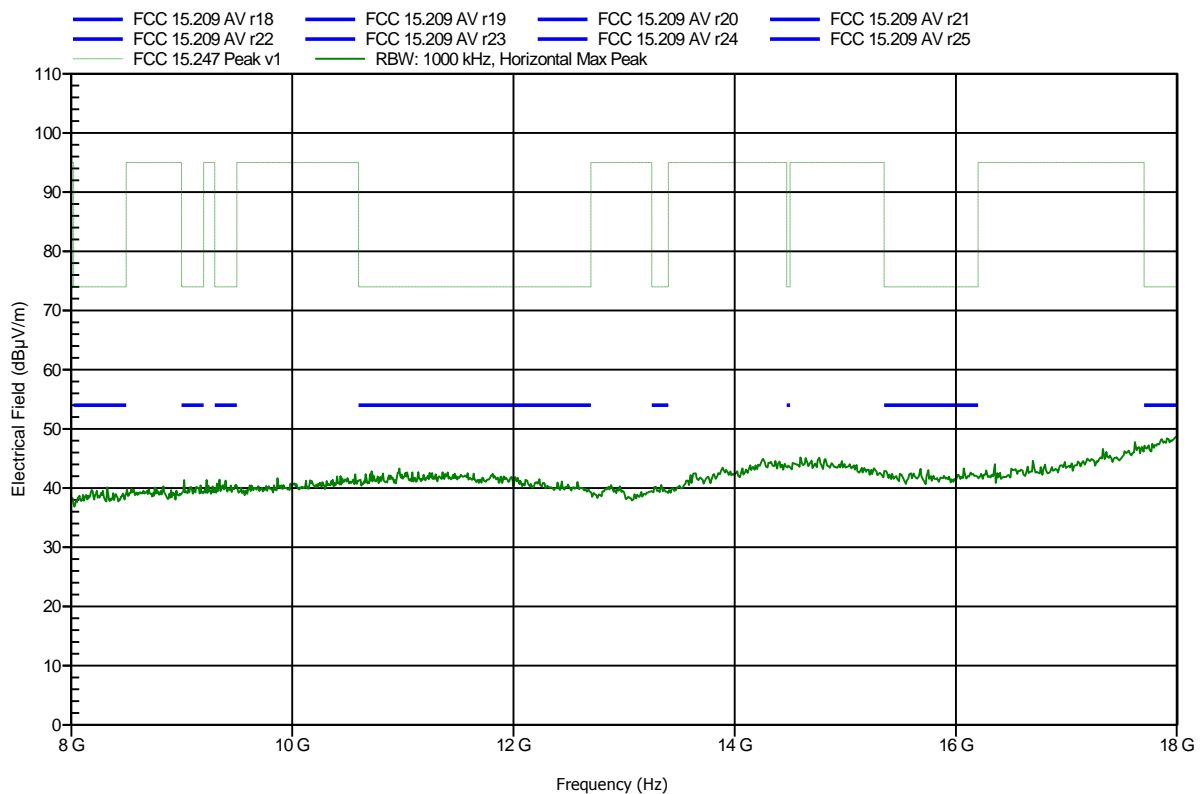




**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer: GN Netcom A/S  
 EUT Name: Bluetooth Speakerphone  
 Model: HFS210  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.7V lithium, USB charging  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 100 cm converted to 3m  
 Mode: TX; 2441 MHz; GFSK; DH5  
 Test Date: 2013-09-10  
 Note:

Index 45

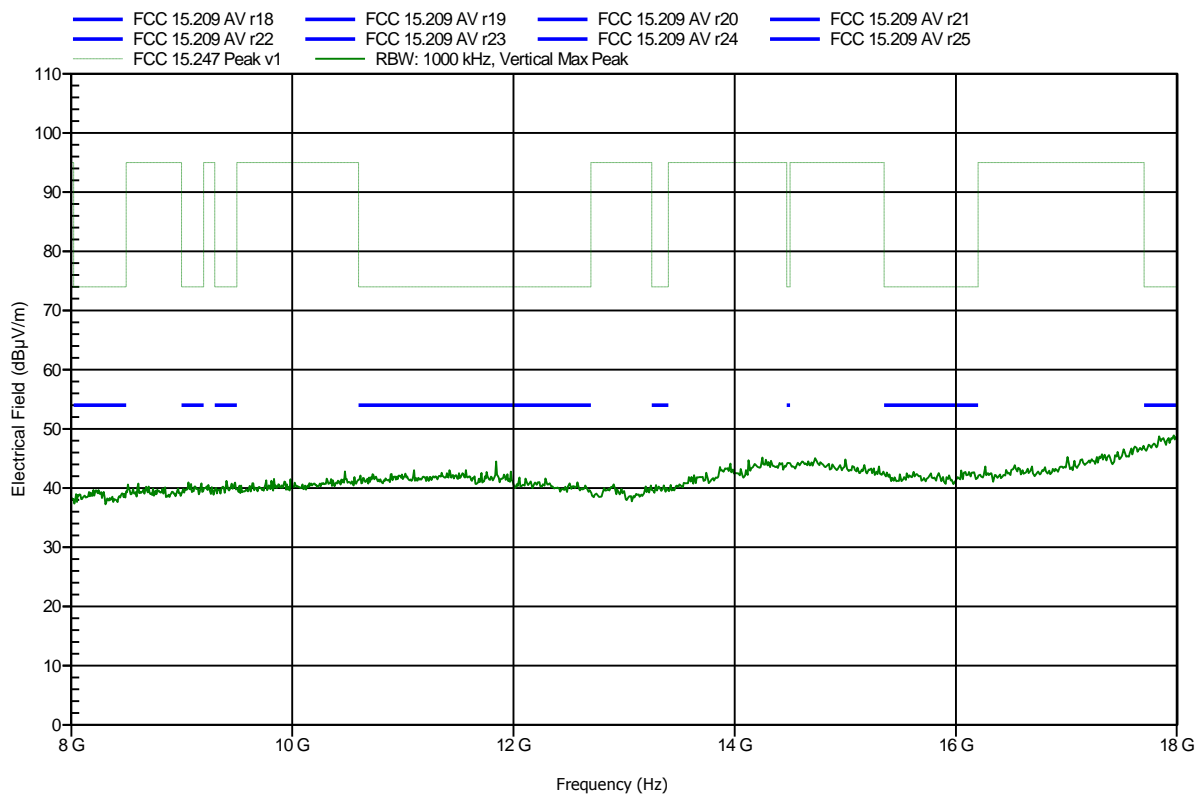


**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer:	GN Netcom A/S
EUT Name:	Bluetooth Speakerphone
Model:	HFS210
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7V lithium, USB charging
Antenna:	Rohde & Schwarz HL 025, Horizontal
Measurement distance:	100 cm
Mode:	TX; 2441 MHz; GFSK; DH5
Test Date:	2013-09-10
Note:	

Index 44

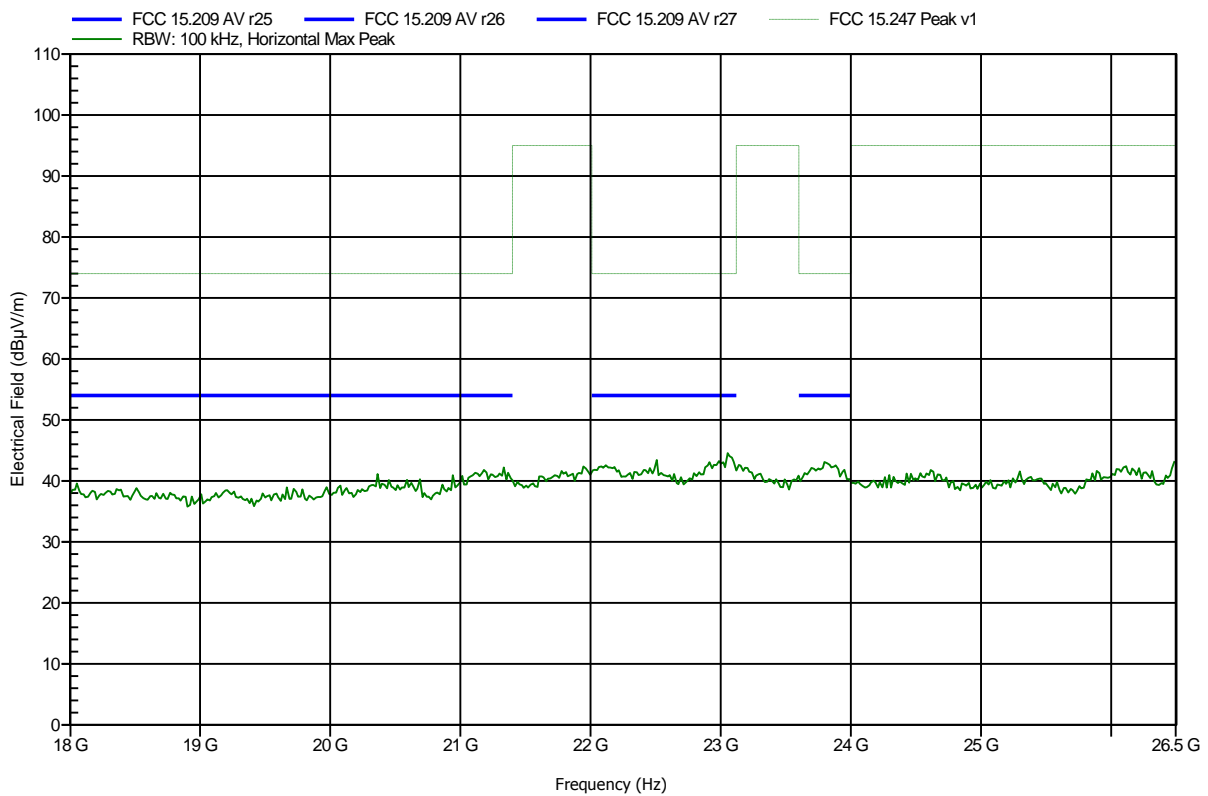


**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer:	GN Netcom A/S
EUT Name:	Bluetooth Speakerphone
Model:	HFS210
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7V lithium, USB charging
Antenna:	Rohde & Schwarz HL 025, Vertical
Measurement distance:	100 cm
Mode:	TX; 2441 MHz; GFSK; DH5
Test Date:	2013-09-10
Note:	

Index 46

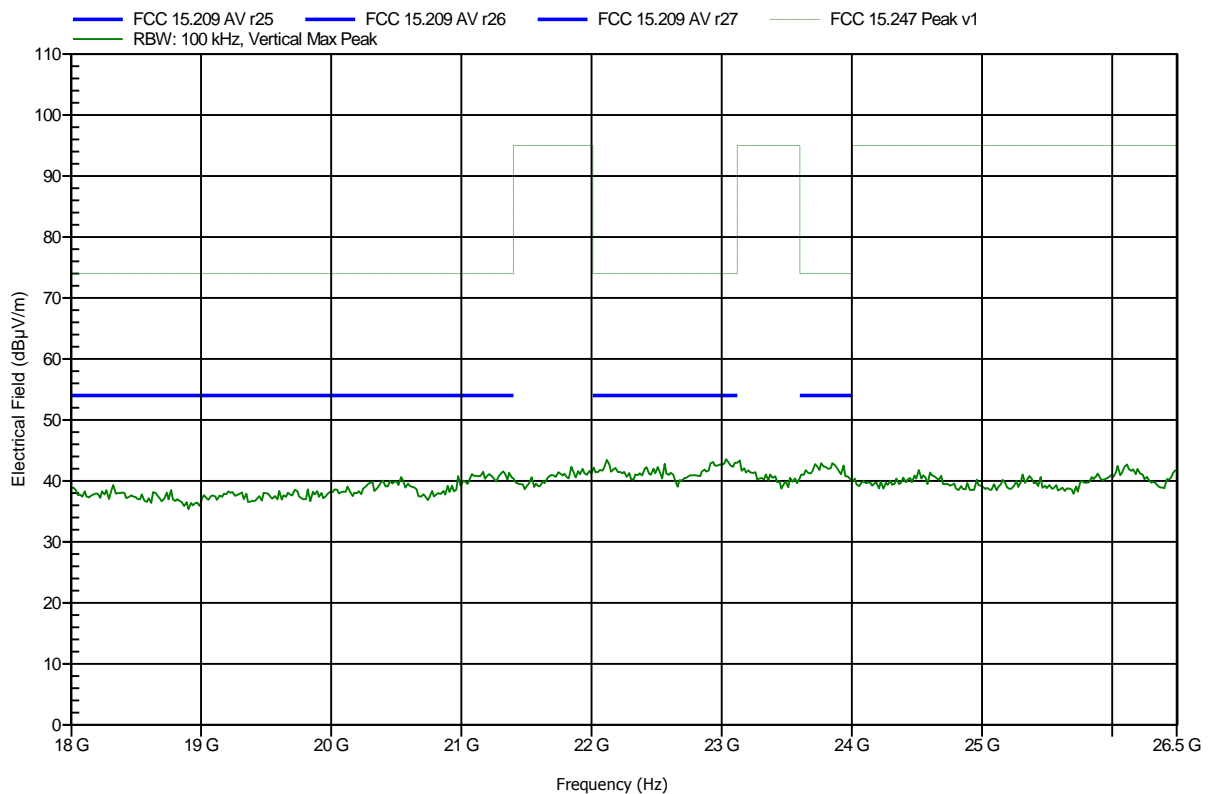


**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer: GN Netcom A/S  
 EUT Name: Bluetooth Speakerphone  
 Model: HFS210  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.7V lithium, USB charging  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; 2480 MHz; GFSK; DH5  
 Test Date: 2013-09-10  
 Note:

Index 33

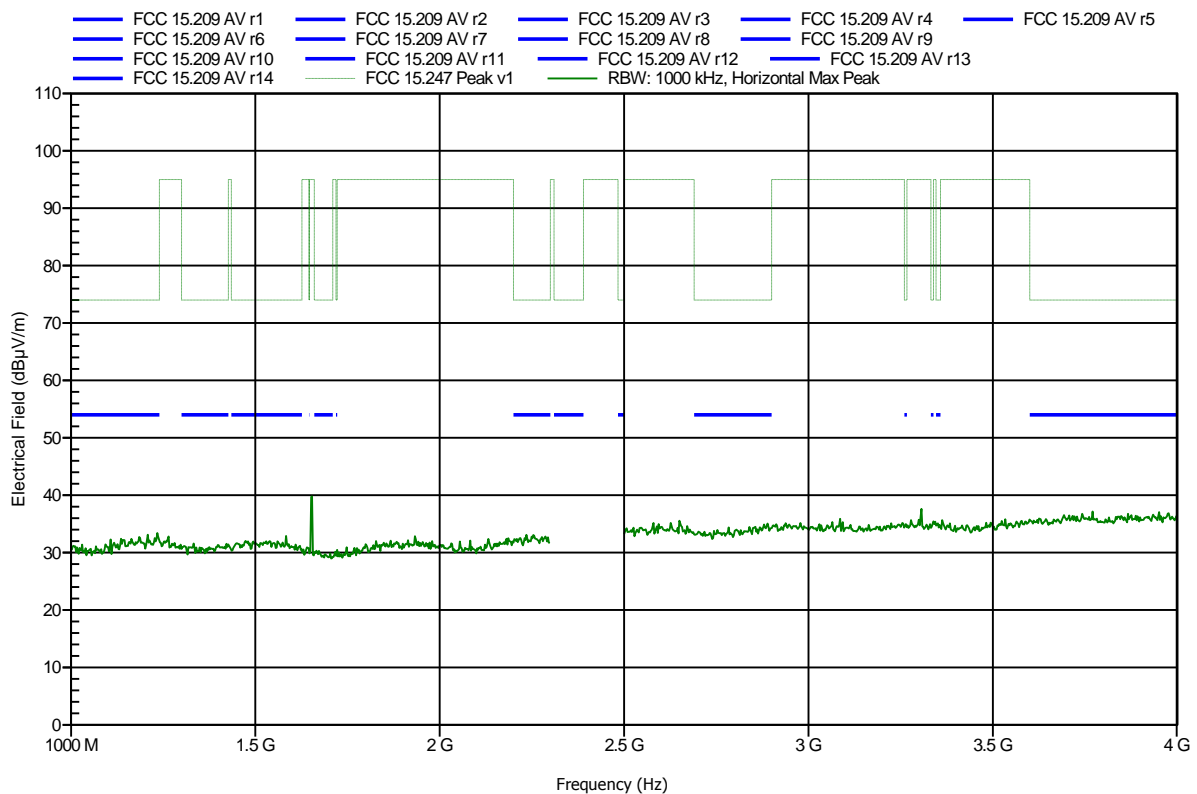


**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer: GN Netcom A/S  
 EUT Name: Bluetooth Speakerphone  
 Model: HFS210  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.7V lithium, USB charging  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 3 m  
 Mode: TX; 2480 MHz; GFSK; DH5  
 Test Date: 2013-09-10  
 Note:

Index 36

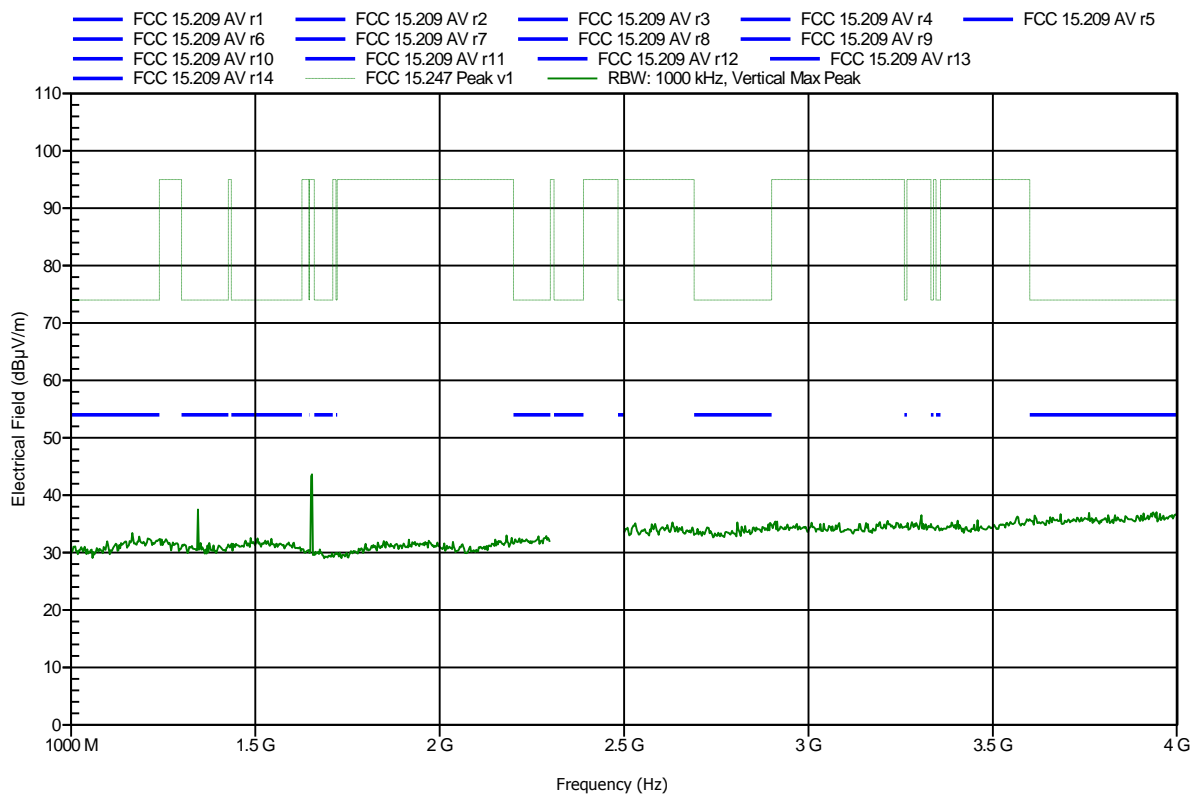


**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer: GN Netcom A/S  
 EUT Name: Bluetooth Speakerphone  
 Model: HFS210  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.7V lithium, USB charging  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; 2480 MHz; GFSK; DH5  
 Test Date: 2013-09-10  
 Note: upper bandedge

Index 34

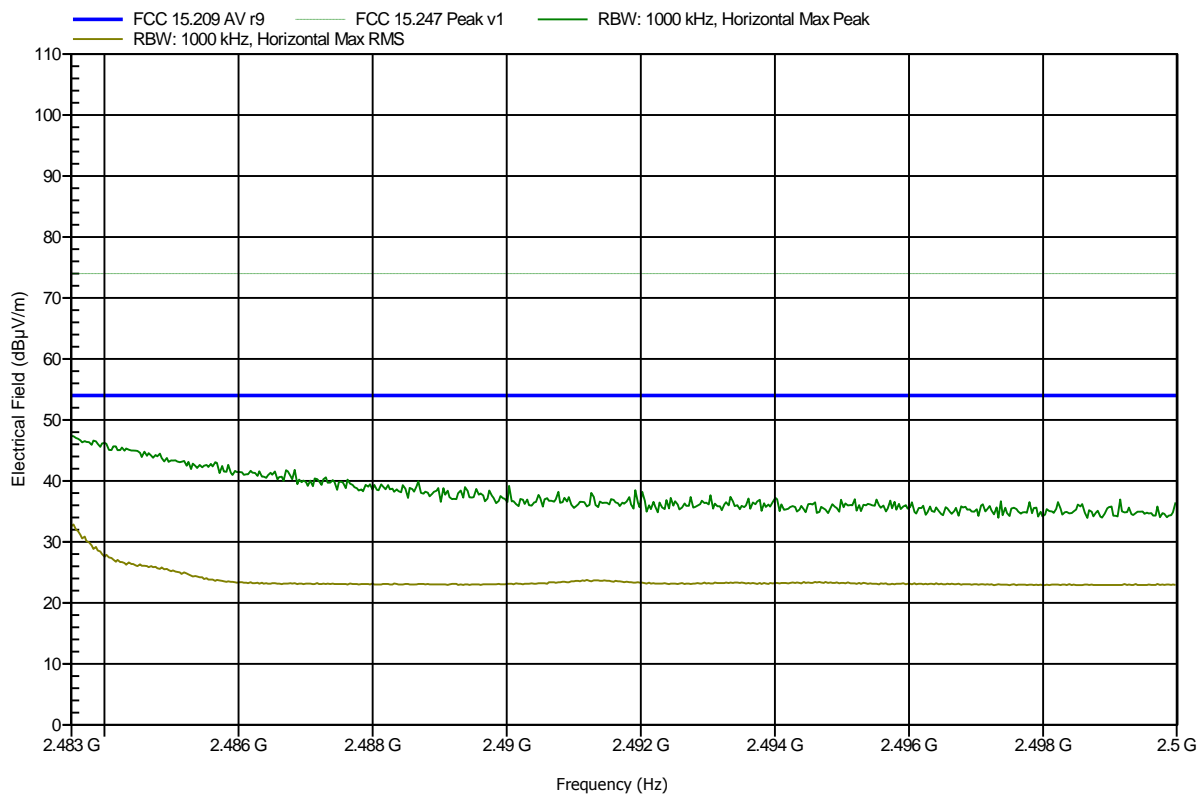


**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer:	GN Netcom A/S
EUT Name:	Bluetooth Speakerphone
Model:	HFS210
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7V lithium, USB charging
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	3 m
Mode:	TX; 2480 MHz; GFSK; DH5
Test Date:	2013-09-10
Note:	upper bandedge

Index 37

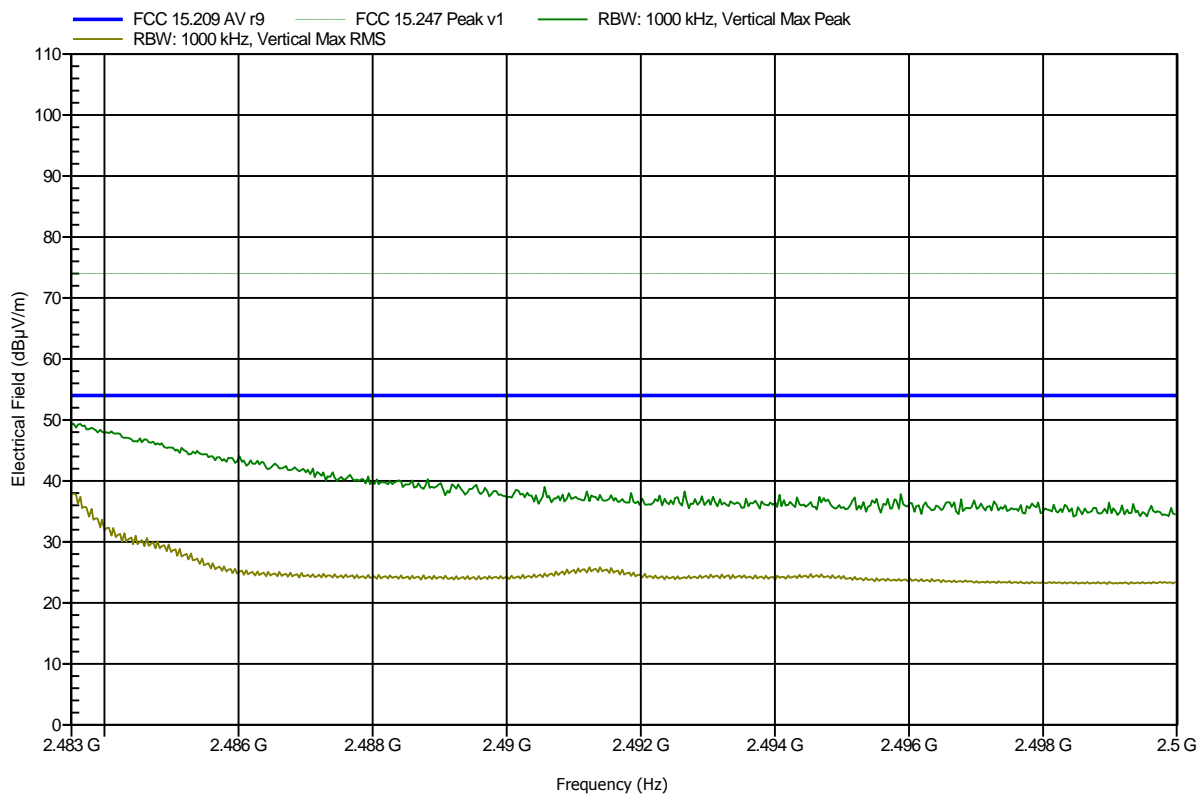


**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer: GN Netcom A/S  
 EUT Name: Bluetooth Speakerphone  
 Model: HFS210  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.7V lithium, USB charging  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; 2480 MHz; GFSK; DH5  
 Test Date: 2013-09-10  
 Note:

Index 35

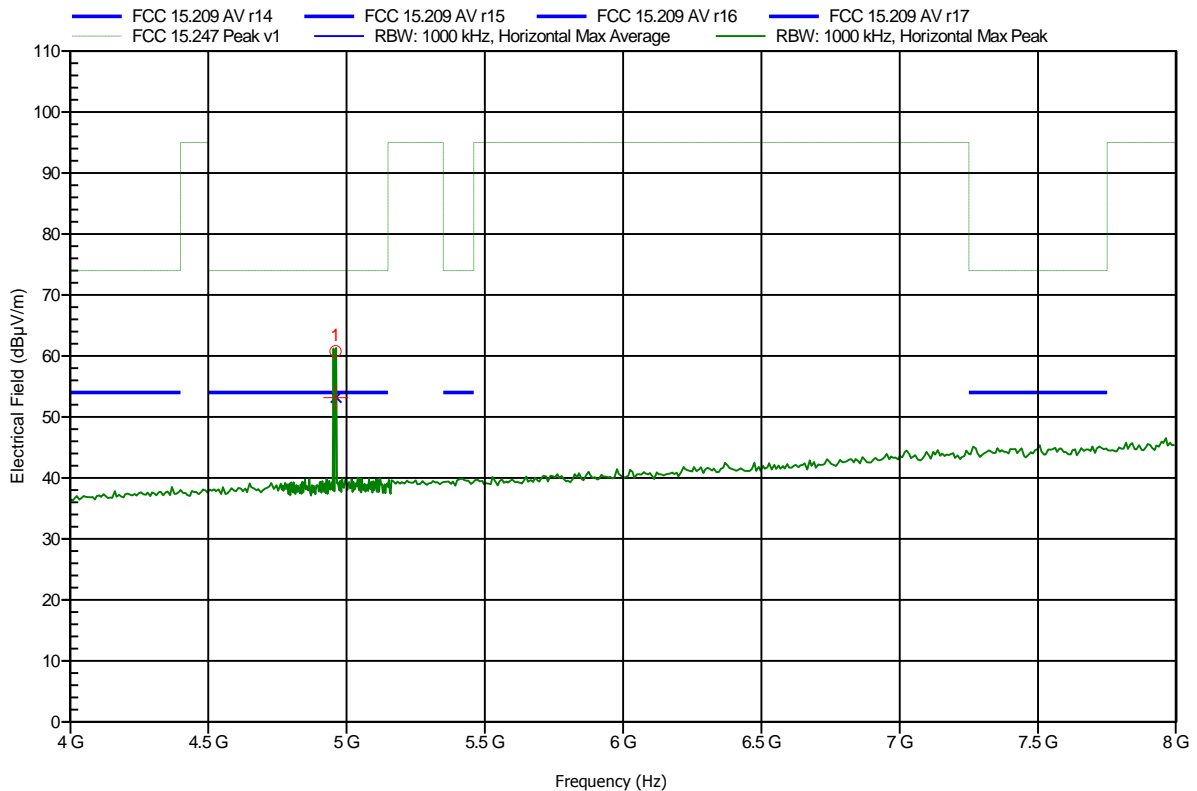

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.96 GHz	60.76 dBµV/m	74 dBµV/m	-13.24 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
4.96 GHz	53.21 dBµV/m	54 dBµV/m	-0.79 dB	Pass




**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer: GN Netcom A/S  
 EUT Name: Bluetooth Speakerphone  
 Model: HFS210  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.7V lithium, USB charging  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 3 m  
 Mode: TX; 2480 MHz; GFSK; DH5  
 Test Date: 2013-09-10  
 Note:

Index 38

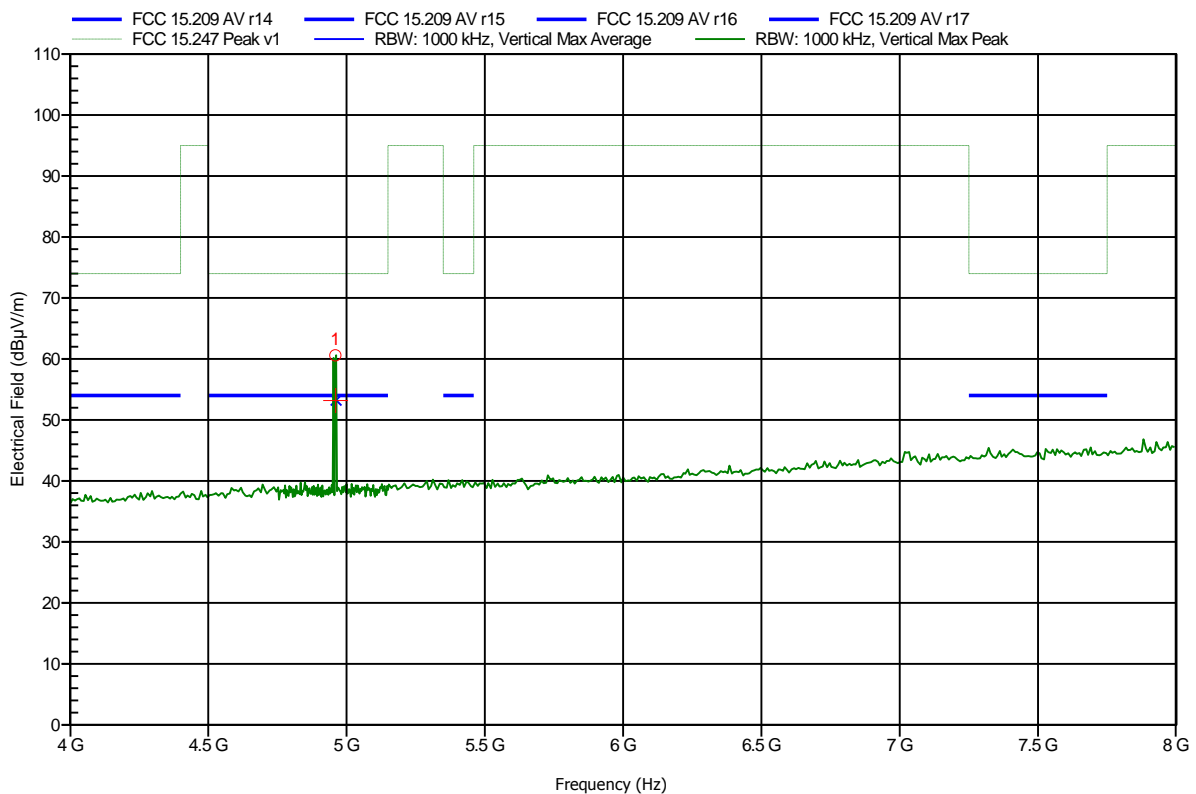

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.96 GHz	60.6 dBµV/m	74 dBµV/m	-13.4 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
4.96 GHz	53.23 dBµV/m	54 dBµV/m	-0.77 dB	Pass

Test Report No.: G0M-1308-3134-TFC247B-V01


 Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer: GN Netcom A/S  
 EUT Name: Bluetooth Speakerphone  
 Model: HFS210  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.7V lithium, USB charging  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 100 cm converted to 3m  
 Mode: TX; 2480 MHz; GFSK; DH5  
 Test Date: 2013-09-10  
 Note:

Index 47

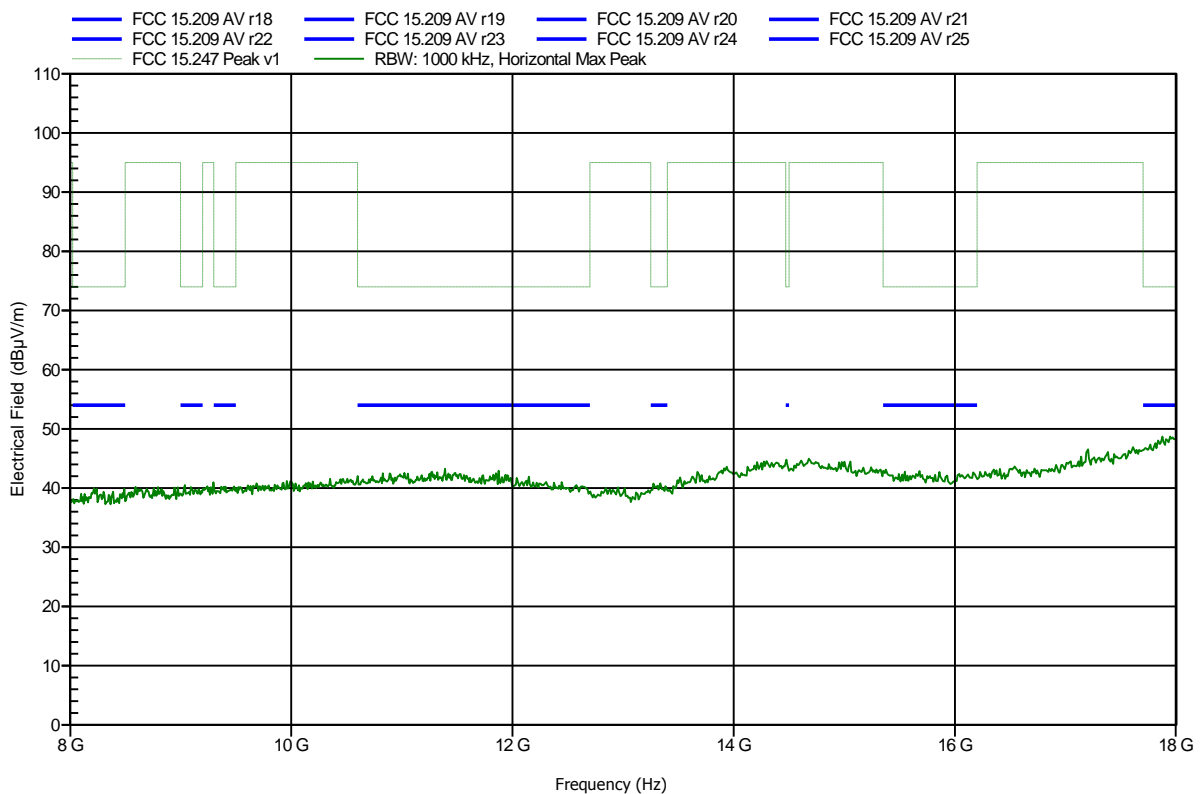


**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer: GN Netcom A/S  
 EUT Name: Bluetooth Speakerphone  
 Model: HFS210  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.7V lithium, USB charging  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 100 cm converted to 3m  
 Mode: TX; 2480 MHz; GFSK; DH5  
 Test Date: 2013-09-10  
 Note:

Index 49

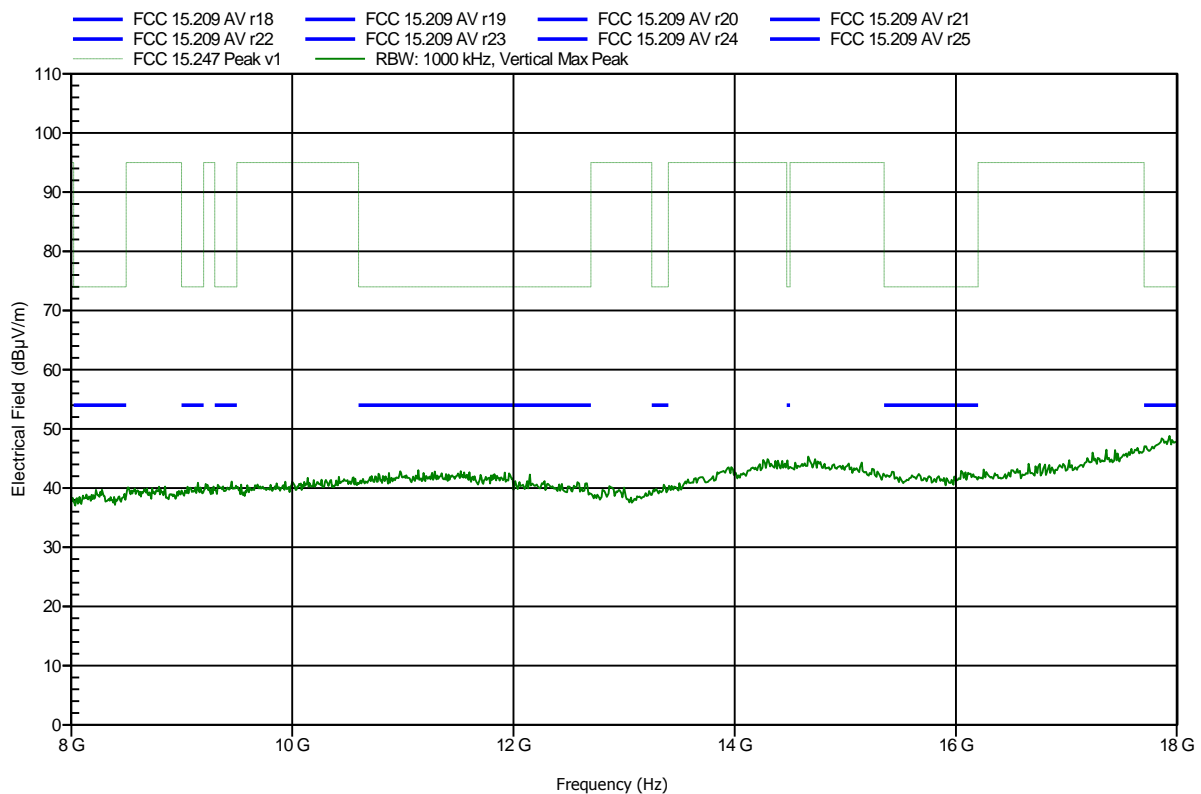


**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer: GN Netcom A/S  
 EUT Name: Bluetooth Speakerphone  
 Model: HFS210  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.7V lithium, USB charging  
 Antenna: Rohde & Schwarz HL 025, Horizontal  
 Measurement distance: 100 cm  
 Mode: TX; 2480 MHz; GFSK; DH5  
 Test Date: 2013-09-10  
 Note:

Index 48

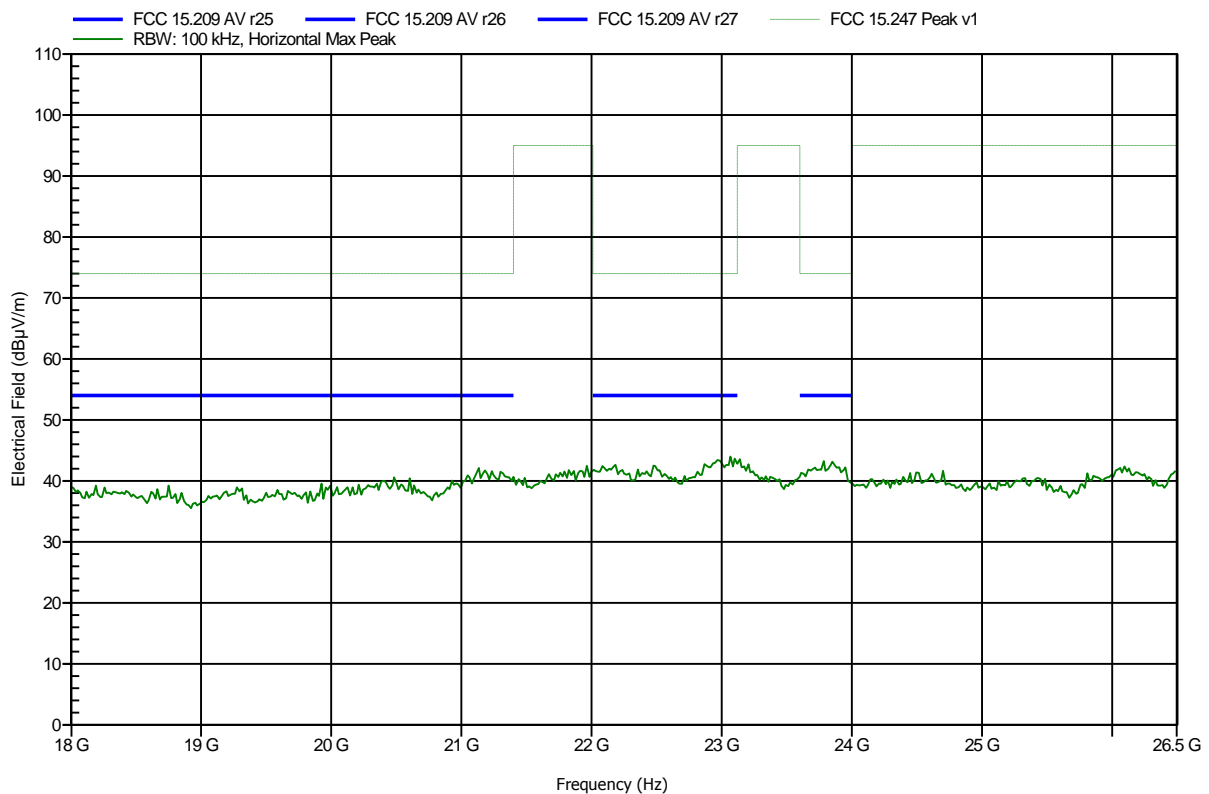


**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer: GN Netcom A/S  
 EUT Name: Bluetooth Speakerphone  
 Model: HFS210  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.7V lithium, USB charging  
 Antenna: Rohde & Schwarz HL 025, Vertical  
 Measurement distance: 100 cm  
 Mode: TX; 2480 MHz; GFSK; DH5  
 Test Date: 2013-09-10  
 Note:

Index 50

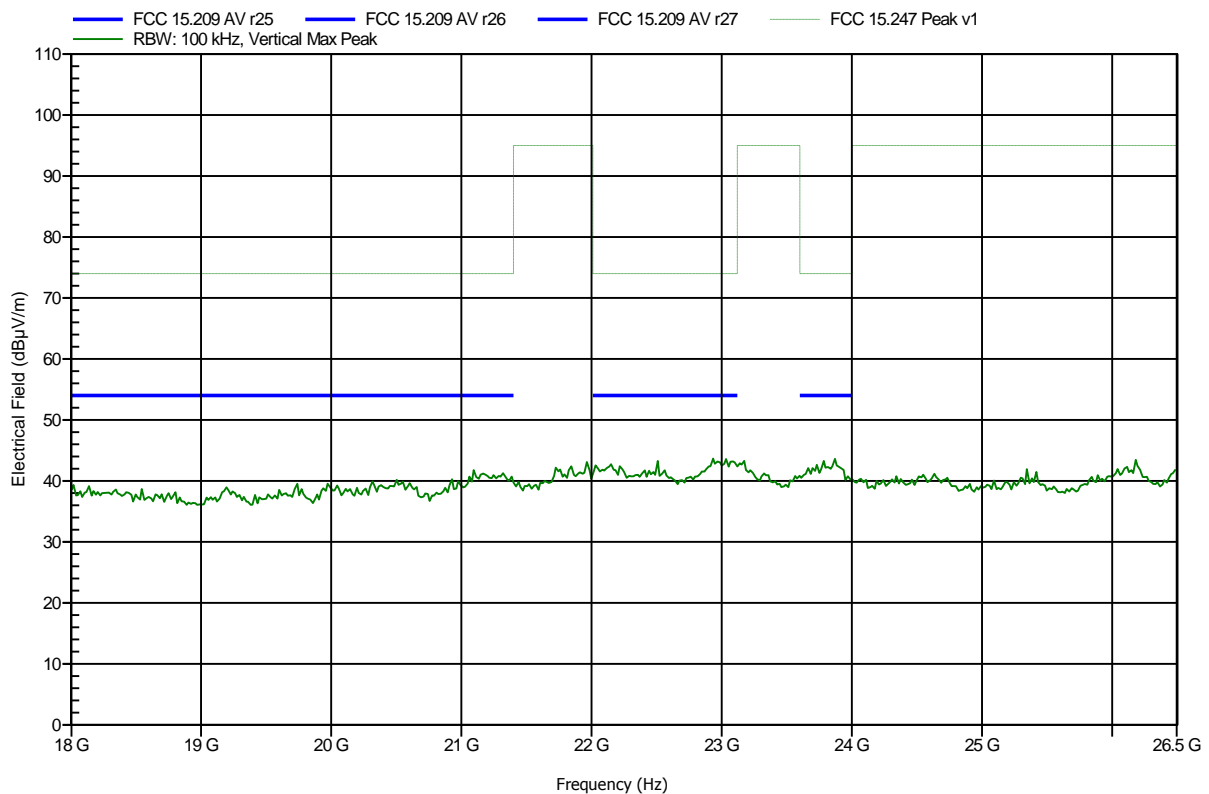


**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer: GN Netcom A/S  
 EUT Name: Bluetooth Speakerphone  
 Model: HFS210  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.7V lithium, USB charging  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; 2402 MHz; 8DPSK; 3DH5  
 Test Date: 2013-09-10  
 Note:

Index 51

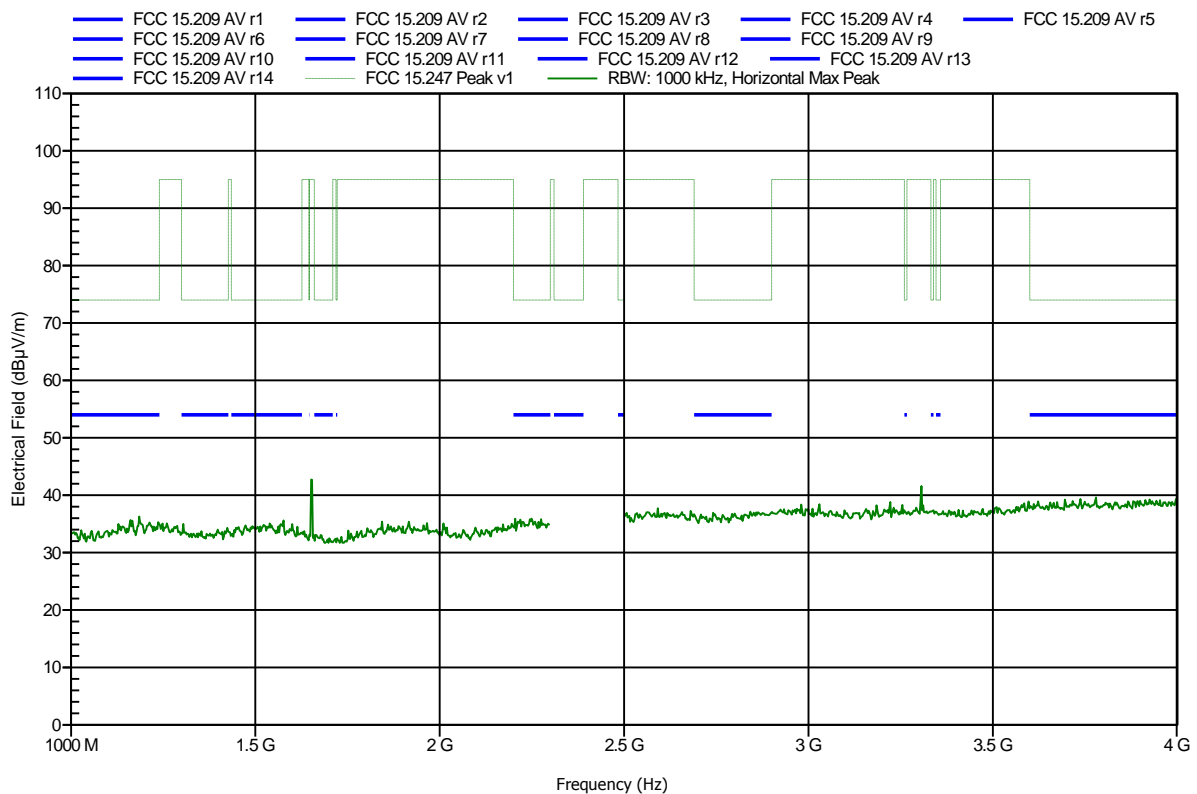


**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer: GN Netcom A/S  
 EUT Name: Bluetooth Speakerphone  
 Model: HFS210  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.7V lithium, USB charging  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 3 m  
 Mode: TX; 2402 MHz; 8DPSK; 3DH5  
 Test Date: 2013-09-10  
 Note:

Index 54

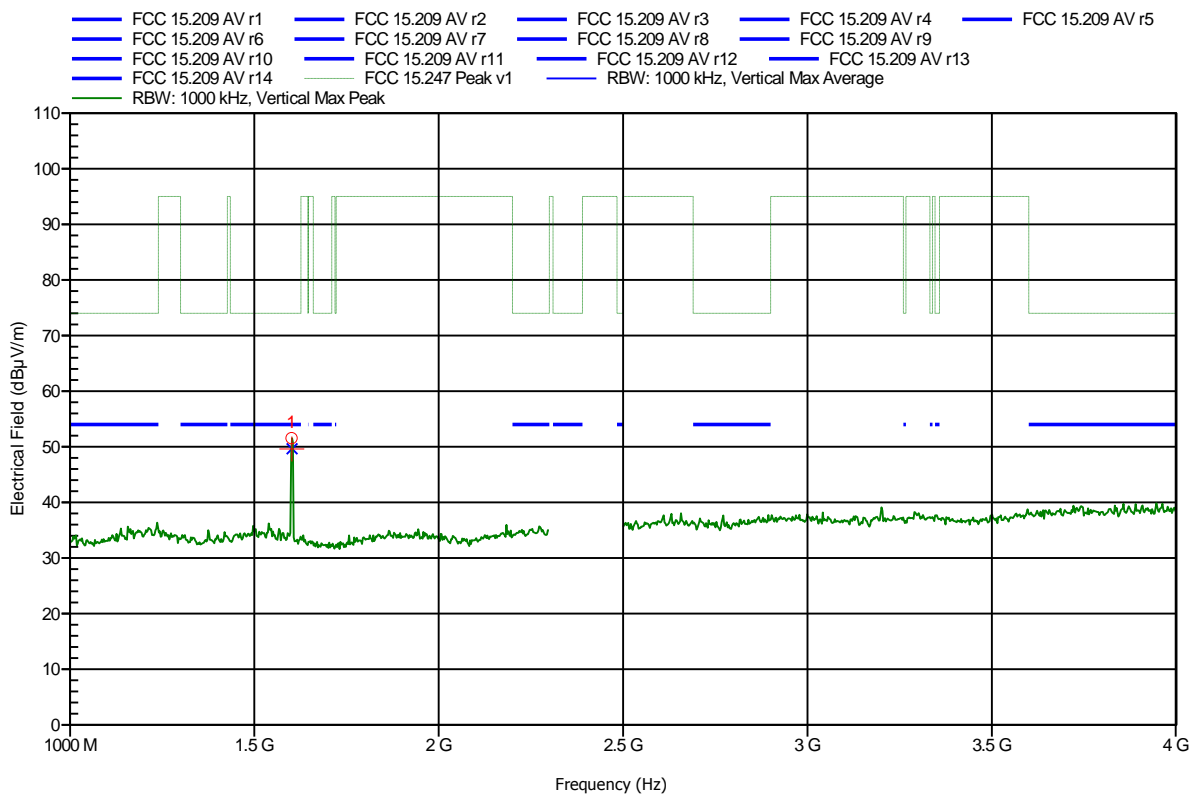


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
1.601 GHz	51.55 dBµV/m	74 dBµV/m	-22.45 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
1.601 GHz	49.66 dBµV/m	54 dBµV/m	-4.34 dB	Pass

**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer:	GN Netcom A/S
EUT Name:	Bluetooth Speakerphone
Model:	HFS210
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7V lithium, USB charging
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	3 m
Mode:	TX; 2402 MHz; 8DPSK; 3DH5
Test Date:	2013-09-10
Note:	lower bandedge

Index 52

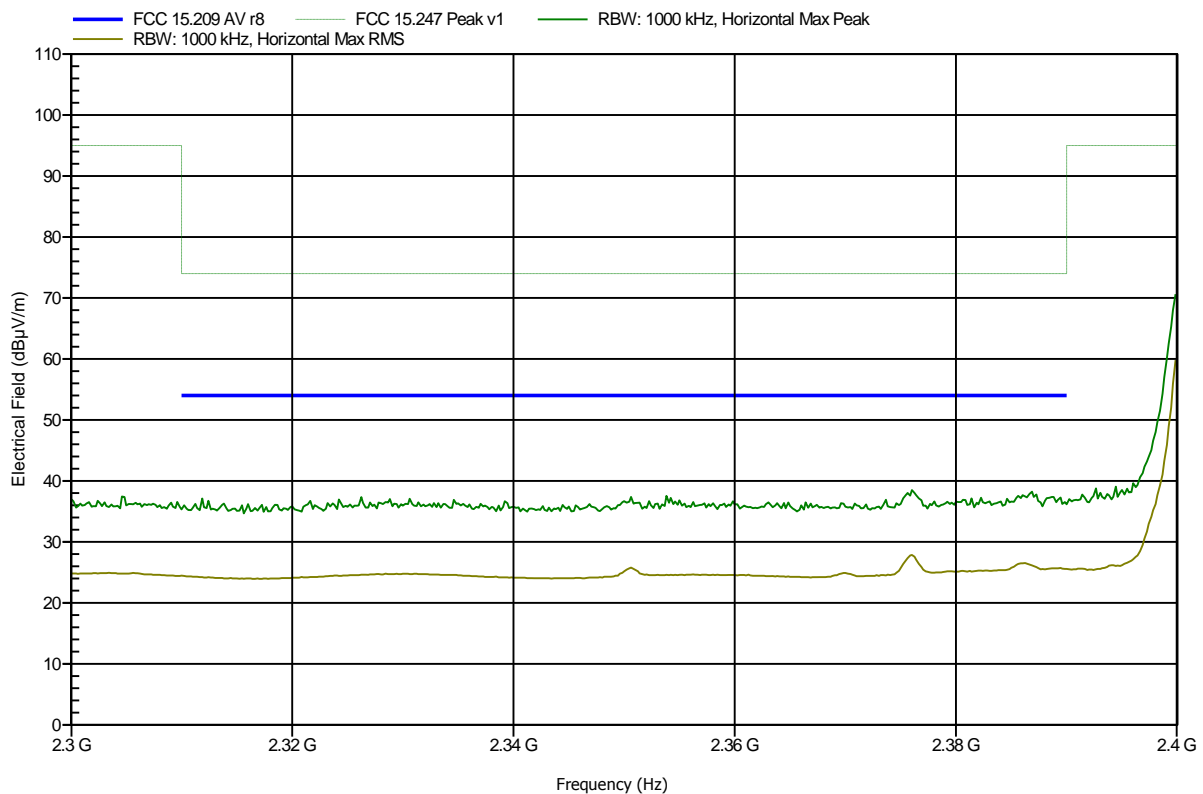




**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer:	GN Netcom A/S
EUT Name:	Bluetooth Speakerphone
Model:	HFS210
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7V lithium, USB charging
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	3 m
Mode:	TX; 2402 MHz; 8DPSK; 3DH5
Test Date:	2013-09-10
Note:	lower bandedge

Index 55

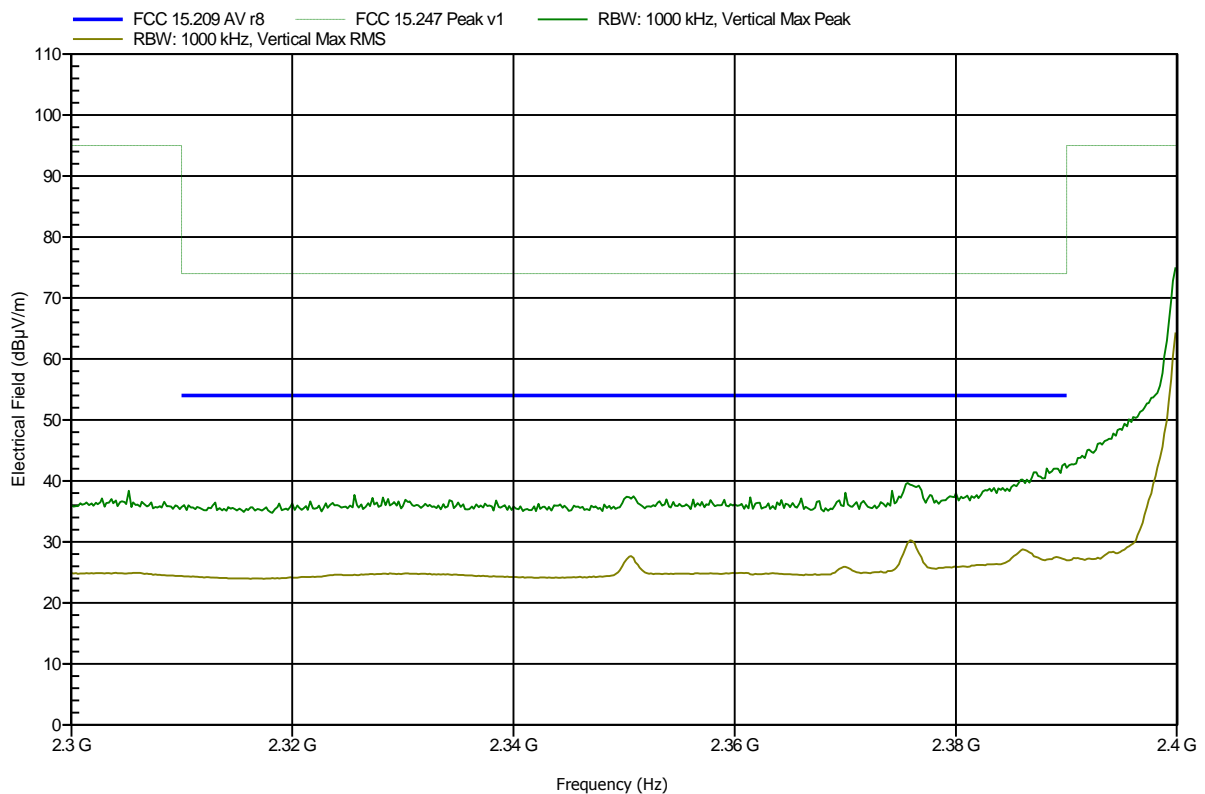


**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer: GN Netcom A/S  
 EUT Name: Bluetooth Speakerphone  
 Model: HFS210  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.7V lithium, USB charging  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; 2402 MHz; 8DPSK; 3DH5  
 Test Date: 2013-09-10  
 Note:

Index 53

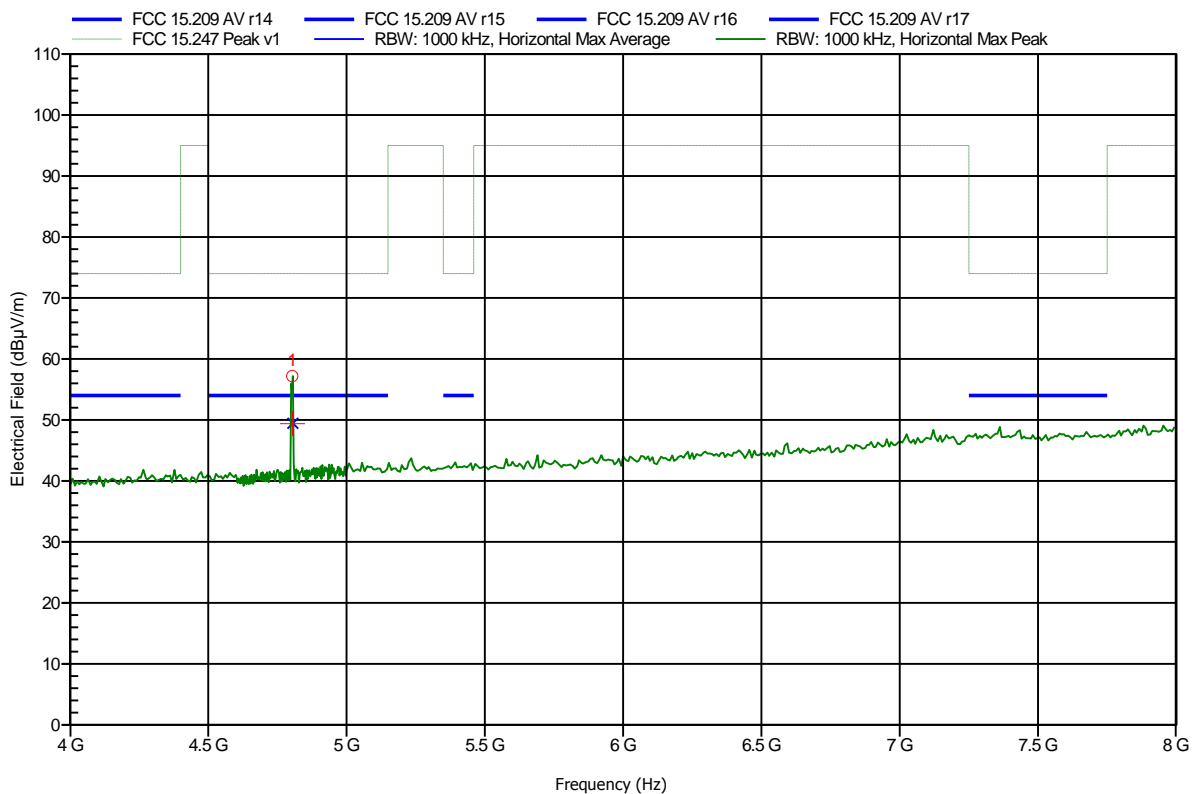


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.804 GHz	57.19 dBµV/m	74 dBµV/m	-16.81 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
4.804 GHz	49.44 dBµV/m	54 dBµV/m	-4.56 dB	Pass

**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer: GN Netcom A/S  
 EUT Name: Bluetooth Speakerphone  
 Model: HFS210  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.7V lithium, USB charging  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 3 m  
 Mode: TX; 2402 MHz; 8DPSK; 3DH5  
 Test Date: 2013-09-10  
 Note:

Index 56

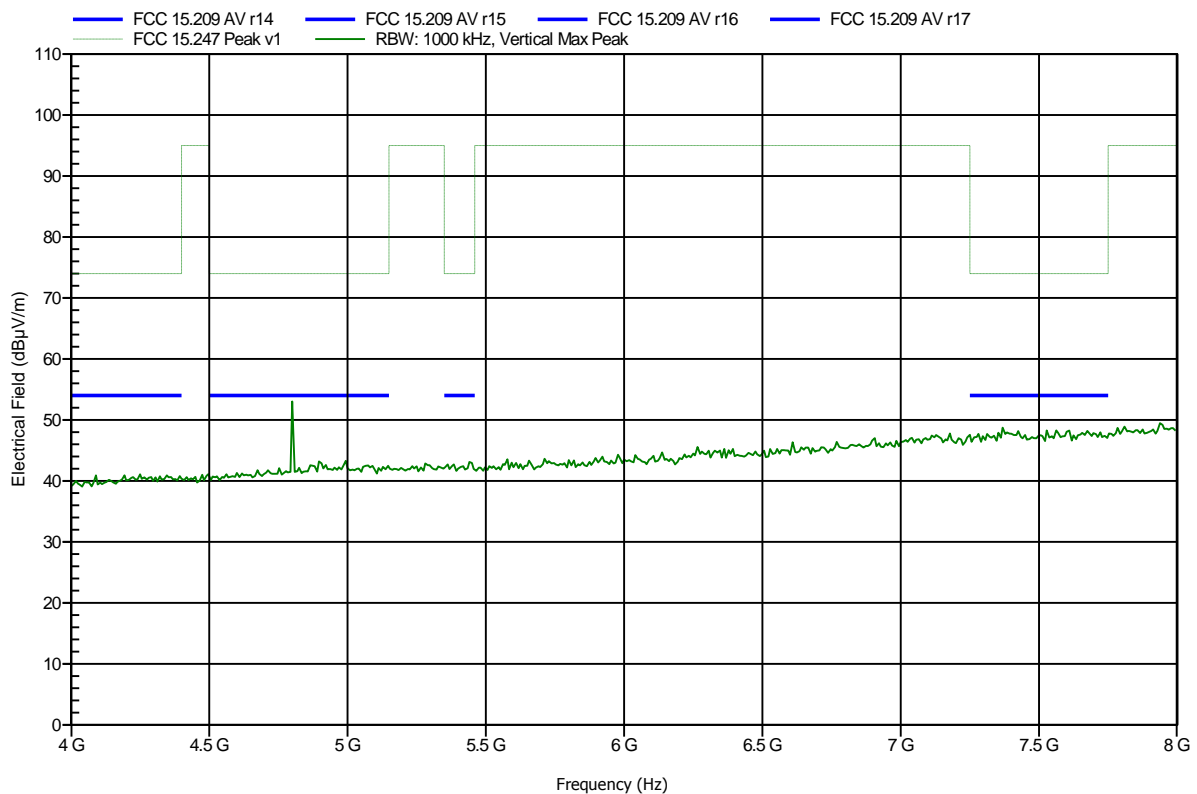


**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer: GN Netcom A/S  
 EUT Name: Bluetooth Speakerphone  
 Model: HFS210  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.7V lithium, USB charging  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; 2441 MHz; 8DPSK; 3DH5  
 Test Date: 2013-09-10  
 Note:

Index 57

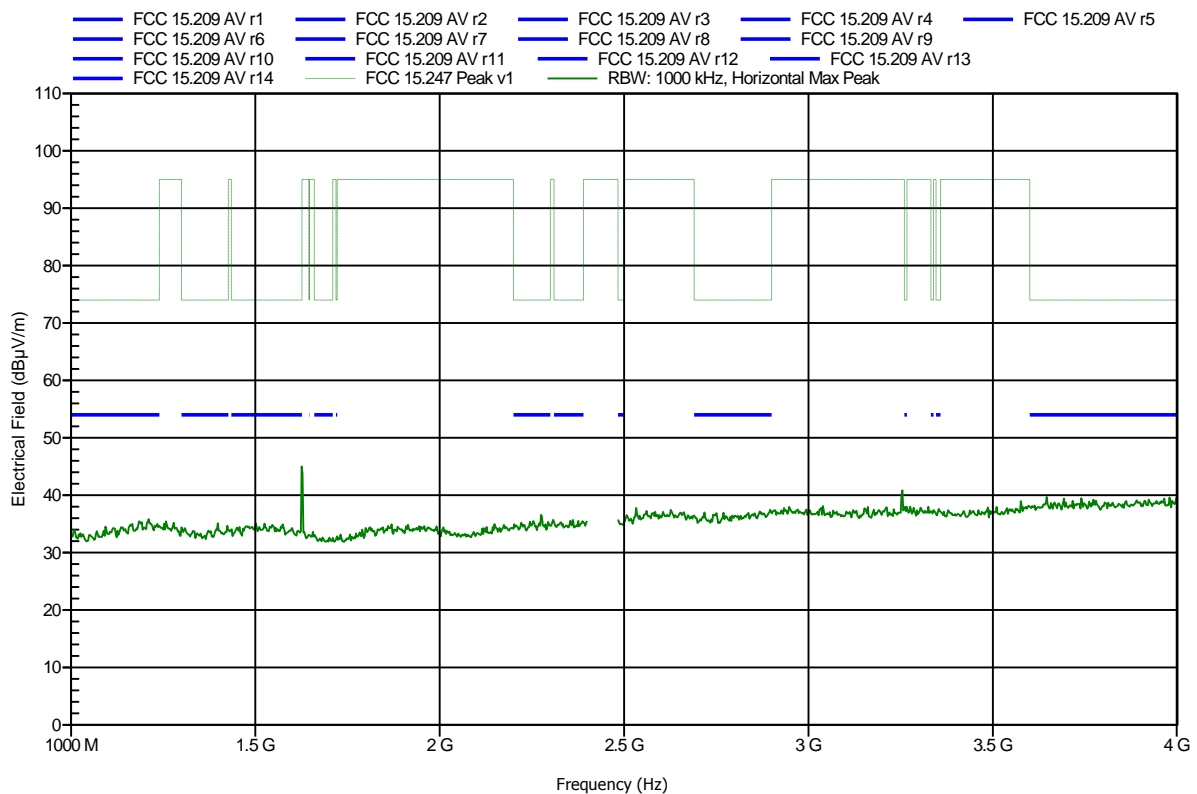


**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer: GN Netcom A/S  
 EUT Name: Bluetooth Speakerphone  
 Model: HFS210  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.7V lithium, USB charging  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 3 m  
 Mode: TX; 2441 MHz; 8DPSK; 3DH5  
 Test Date: 2013-09-10  
 Note:

Index 59

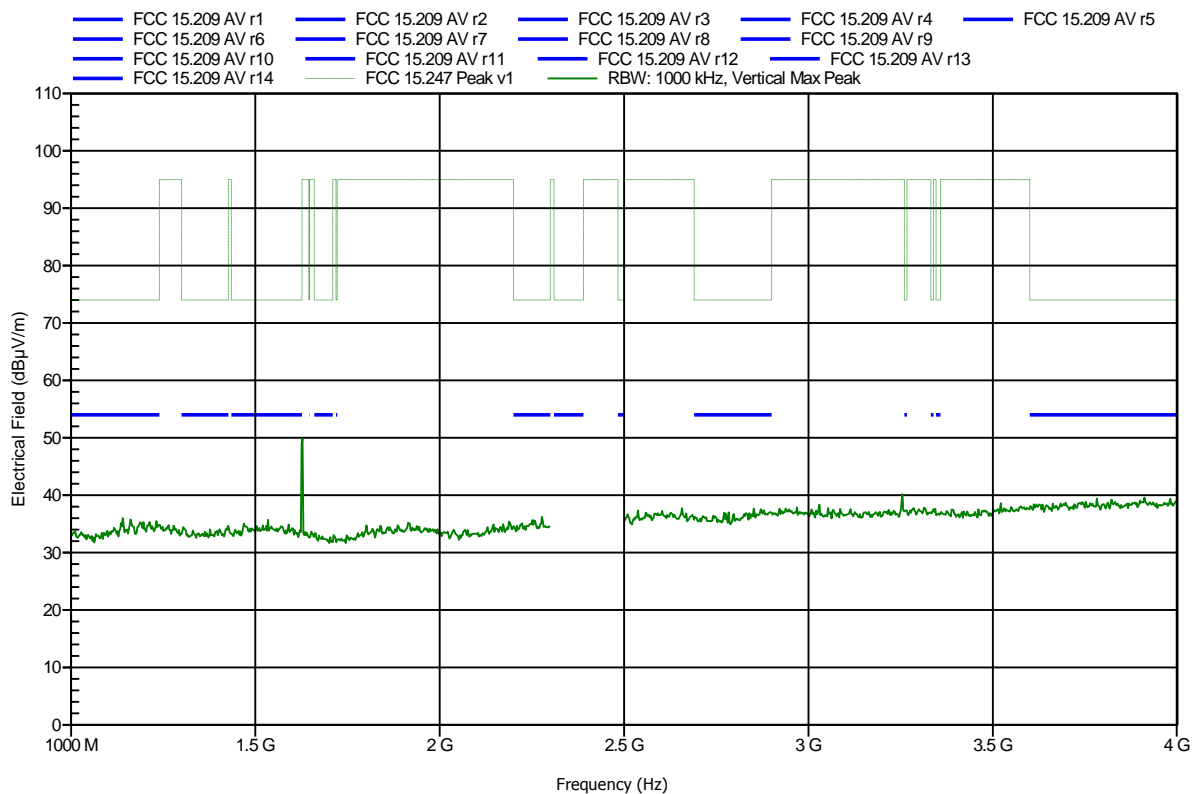


**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer: GN Netcom A/S  
 EUT Name: Bluetooth Speakerphone  
 Model: HFS210  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.7V lithium, USB charging  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; 2441 MHz; 8DPSK; 3DH5  
 Test Date: 2013-09-10  
 Note:

Index 58

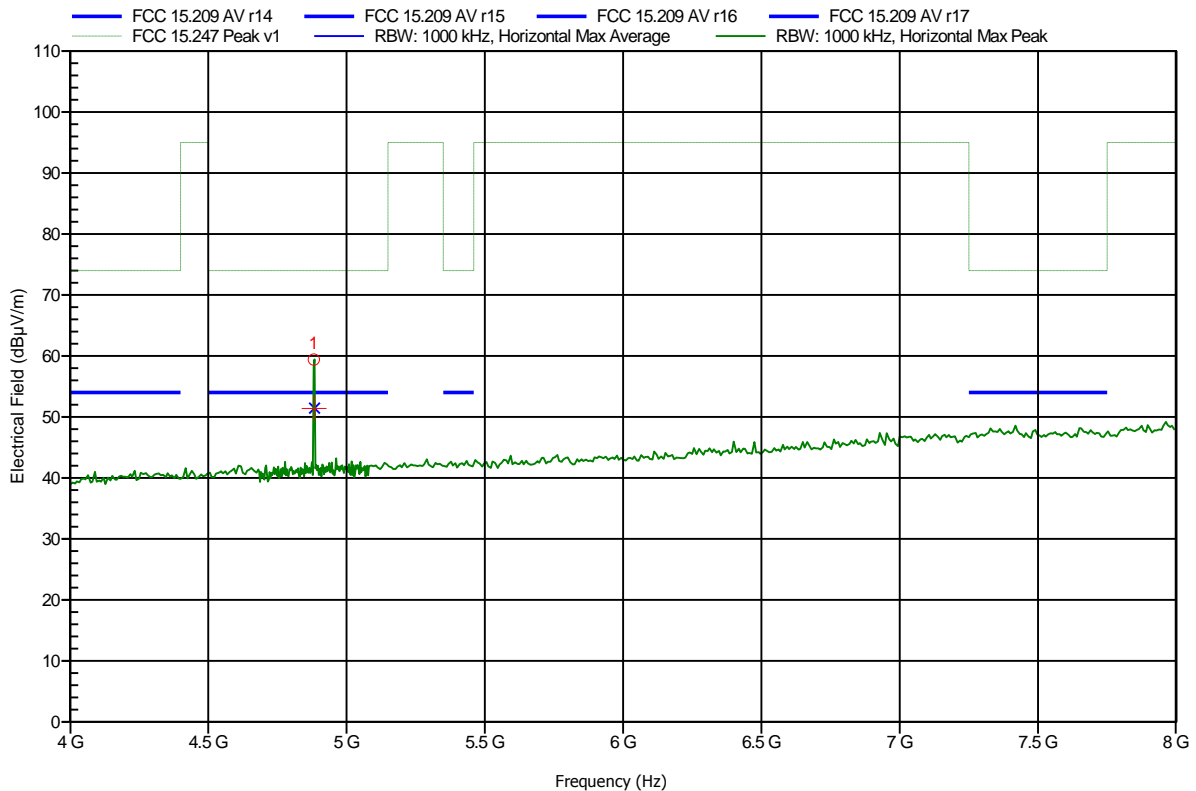


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.882 GHz	59.42 dBµV/m	74 dBµV/m	-14.58 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
4.882 GHz	51.44 dBµV/m	54 dBµV/m	-2.56 dB	Pass

**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer: GN Netcom A/S  
 EUT Name: Bluetooth Speakerphone  
 Model: HFS210  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.7V lithium, USB charging  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 3 m  
 Mode: TX; 2441 MHz; 8DPSK; 3DH5  
 Test Date: 2013-09-10  
 Note:

Index 60

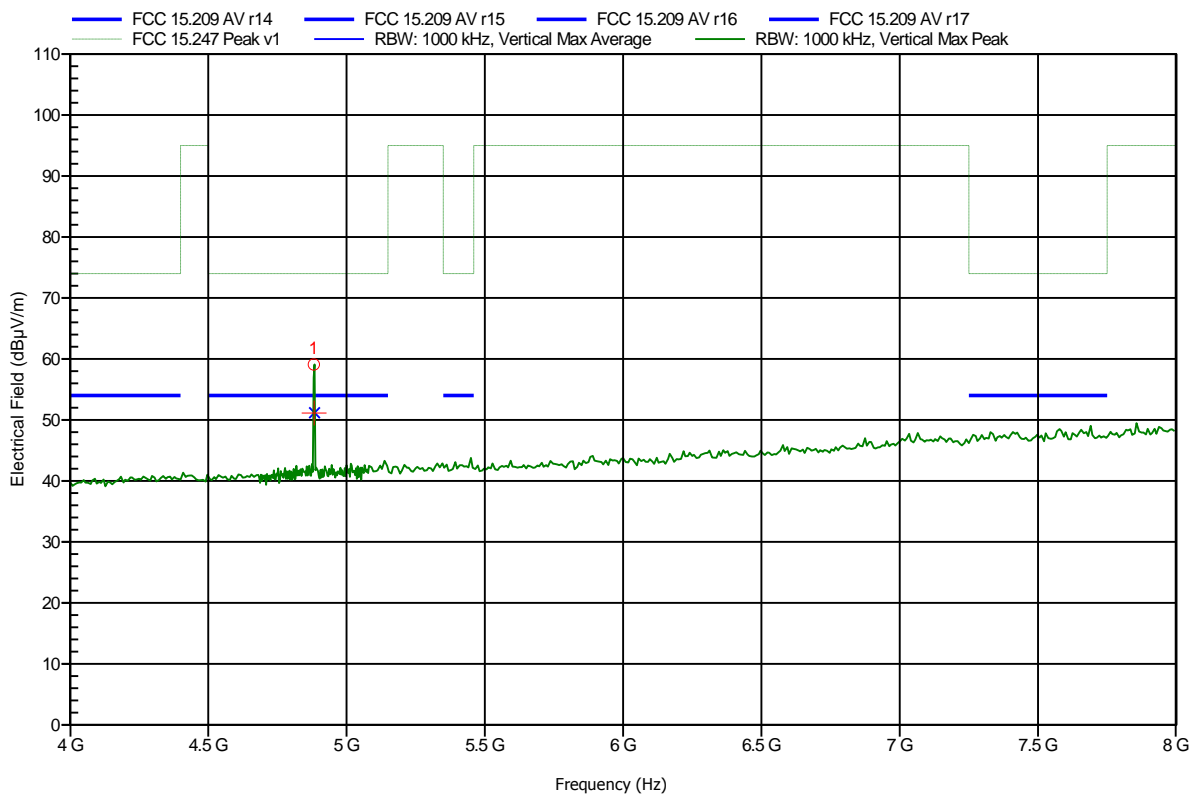


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.882 GHz	59.09 dBµV/m	74 dBµV/m	-14.91 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
4.882 GHz	51.18 dBµV/m	54 dBµV/m	-2.82 dB	Pass

**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer: GN Netcom A/S  
 EUT Name: Bluetooth Speakerphone  
 Model: HFS210  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.7V lithium, USB charging  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; 2480 MHz; 8DPSK; 3DH5  
 Test Date: 2013-09-10  
 Note:

Index 62

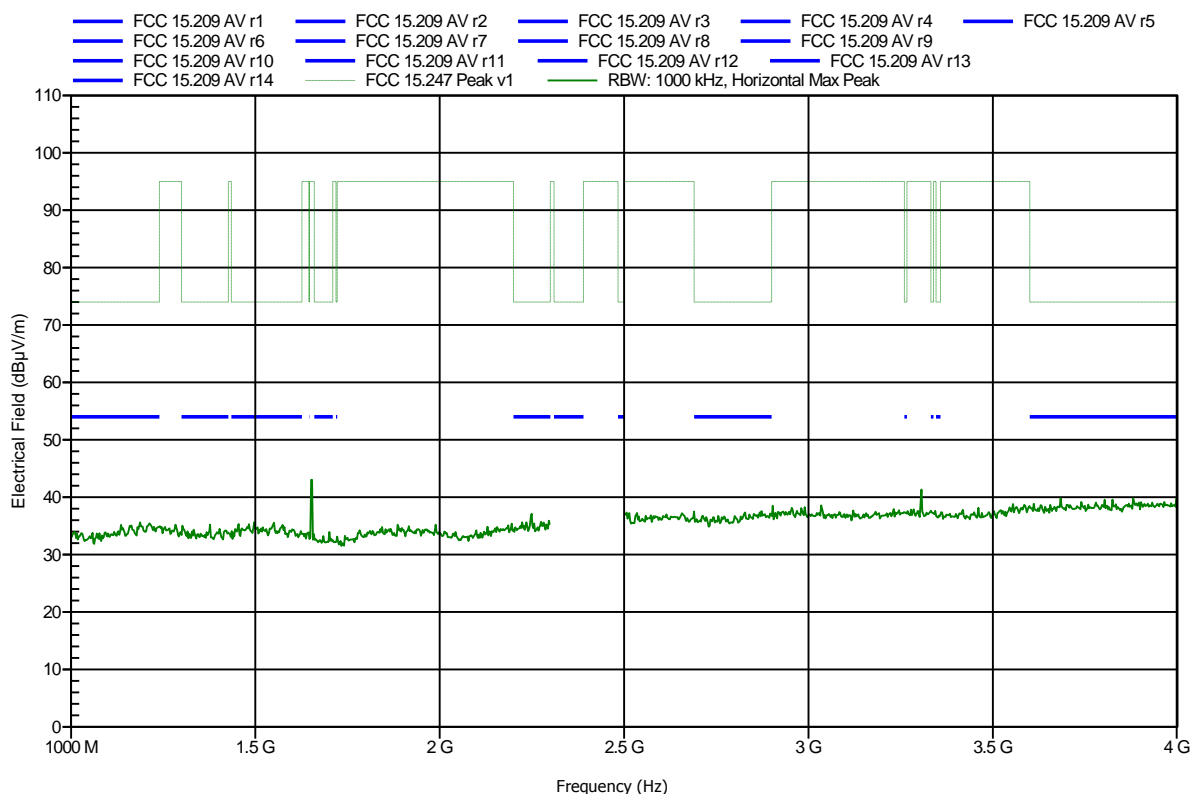




**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer: GN Netcom A/S  
 EUT Name: Bluetooth Speakerphone  
 Model: HFS210  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.7V lithium, USB charging  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 3 m  
 Mode: TX; 2480 MHz; 8DPSK; 3DH5  
 Test Date: 2013-09-10  
 Note:

Index 65

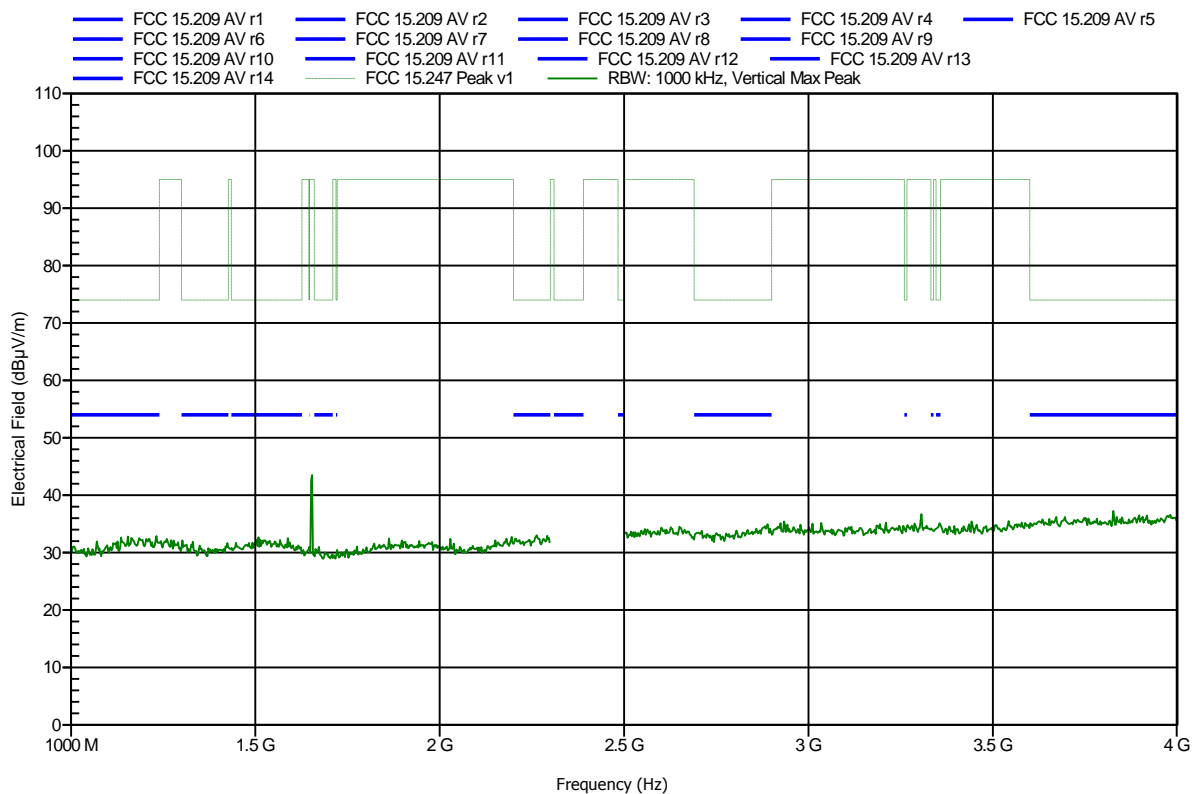


**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer: GN Netcom A/S  
 EUT Name: Bluetooth Speakerphone  
 Model: HFS210  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.7V lithium, USB charging  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; 2480 MHz; 8DPSK; 3DH5  
 Test Date: 2013-09-10  
 Note: upper bandedge

Index 63

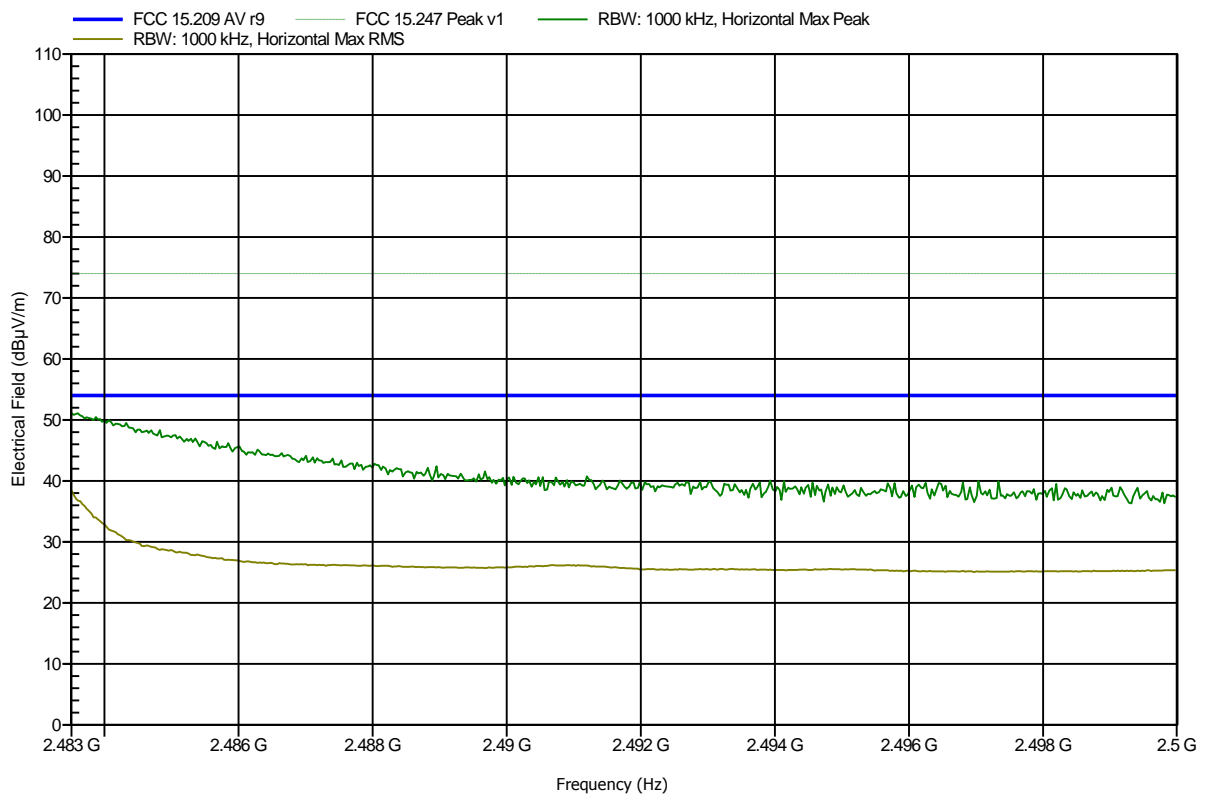


**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer:	GN Netcom A/S
EUT Name:	Bluetooth Speakerphone
Model:	HFS210
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7V lithium, USB charging
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	3 m
Mode:	TX; 2480 MHz; 8DPSK; 3DH5
Test Date:	2013-09-10
Note:	upper bandedge

Index 66

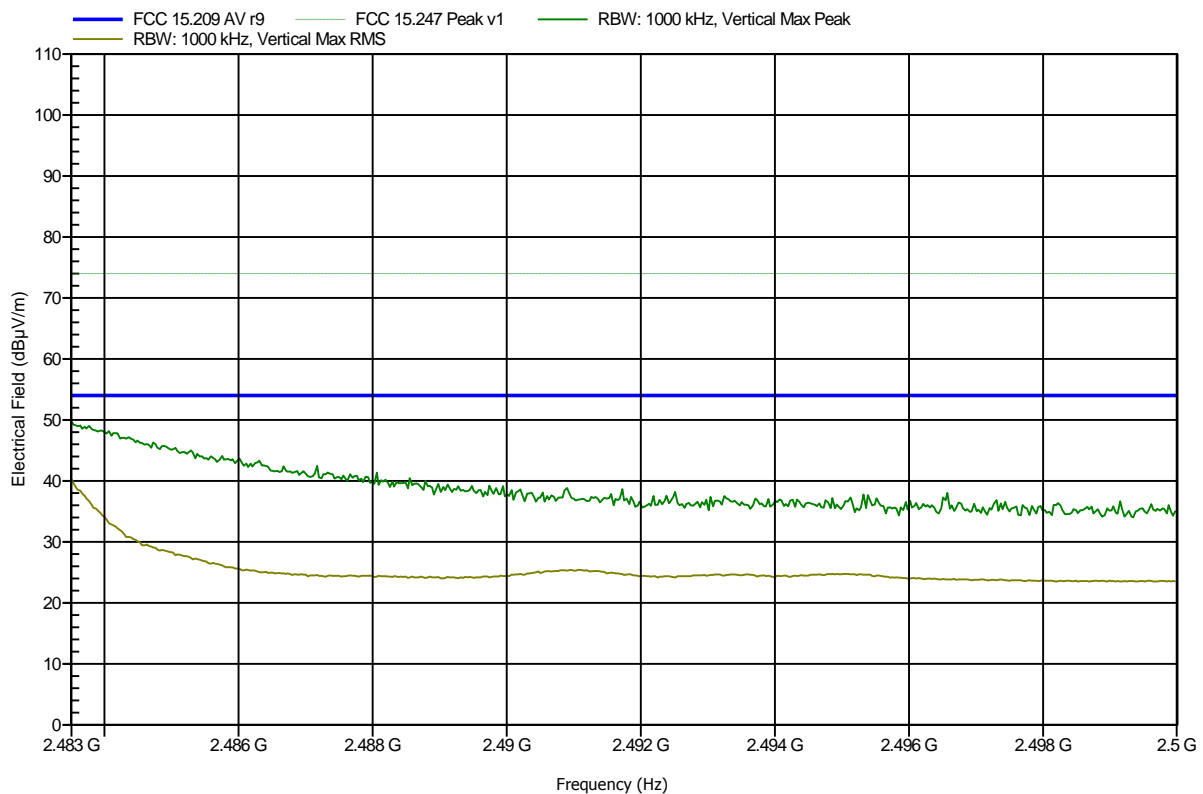


**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer: GN Netcom A/S  
 EUT Name: Bluetooth Speakerphone  
 Model: HFS210  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.7V lithium, USB charging  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; 2480 MHz; 8DPSK; 3DH5  
 Test Date: 2013-09-10  
 Note:

Index 64

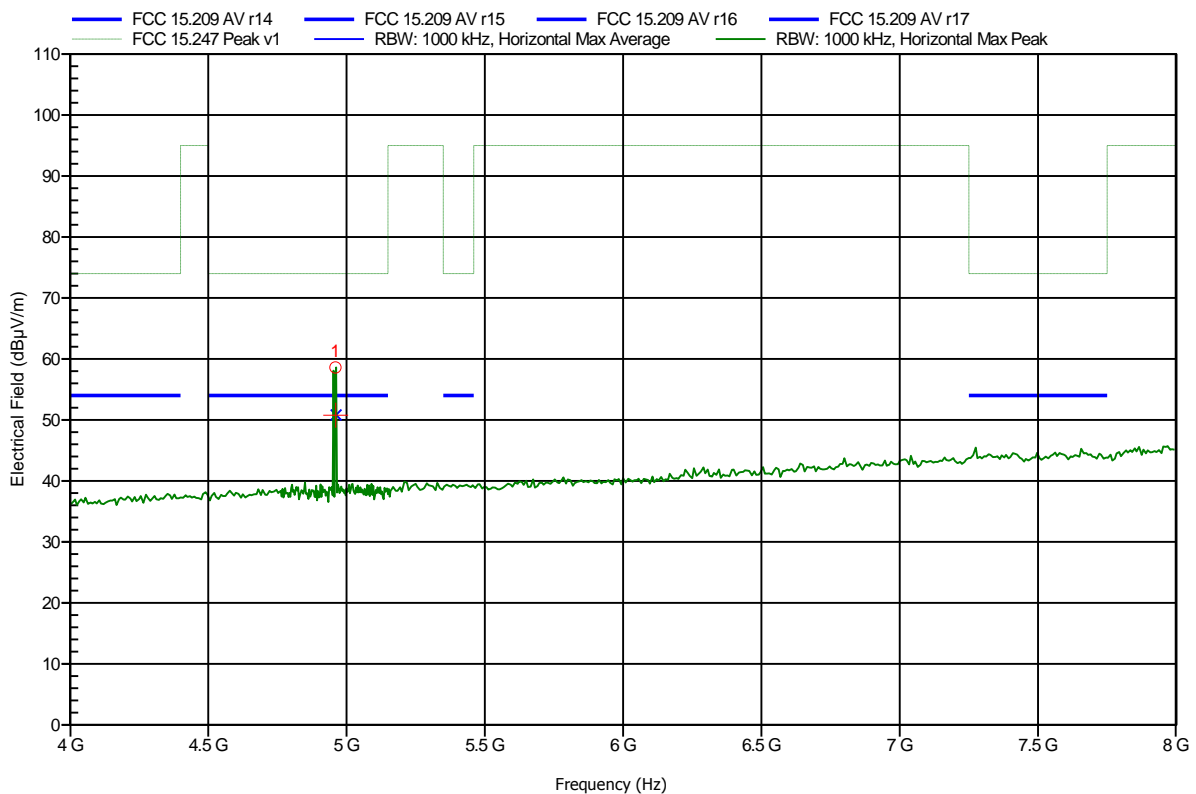

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.96 GHz	58.6 dBµV/m	74 dBµV/m	-15.4 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
4.96 GHz	50.82 dBµV/m	54 dBµV/m	-3.18 dB	Pass

**Test Report No.: G0M-1308-3134-TFC247B-V01**


 Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

**Spurious emissions according to FCC 15.247**

Project number: G0M-1308-3134

Manufacturer: GN Netcom A/S  
 EUT Name: Bluetooth Speakerphone  
 Model: HFS210  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.7V lithium, USB charging  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 3 m  
 Mode: TX; 2480 MHz; 8DPSK; 3DH5  
 Test Date: 2013-09-10  
 Note:

Index 67

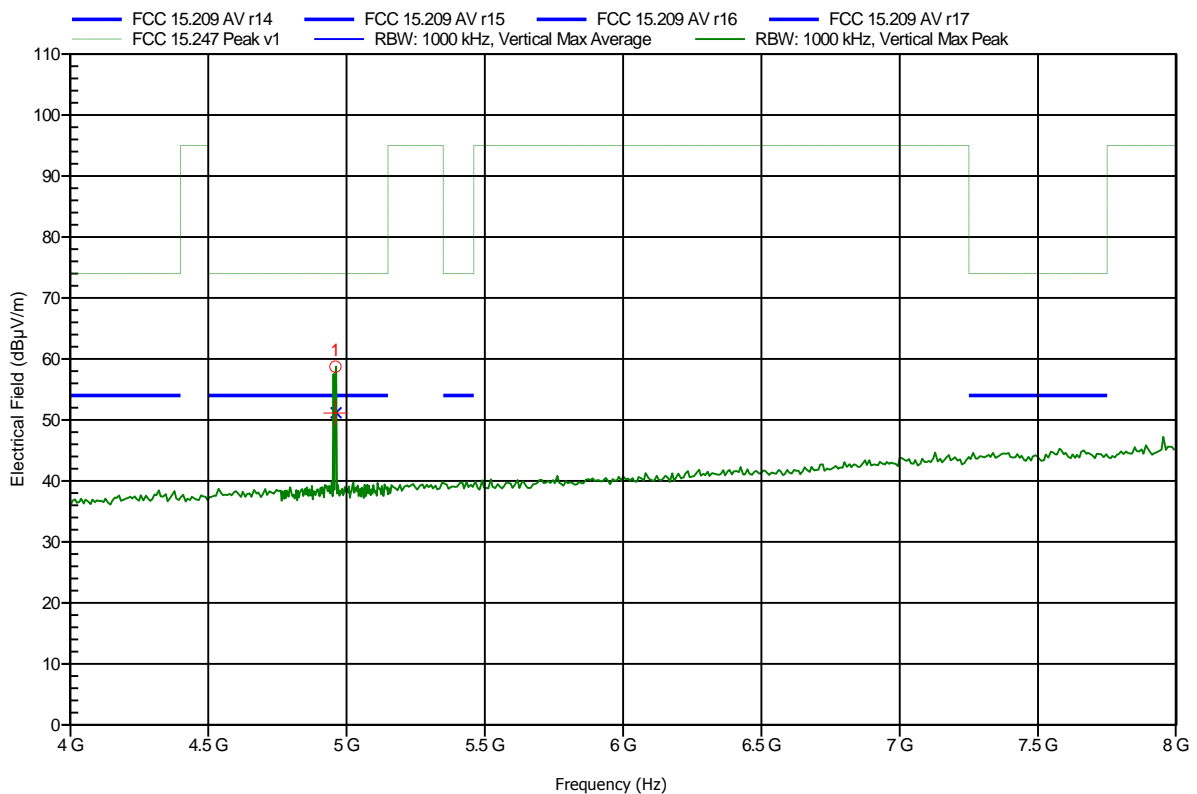

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.96 GHz	58.74 dBµV/m	74 dBµV/m	-15.26 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
4.96 GHz	51.18 dBµV/m	54 dBµV/m	-2.82 dB	Pass


## ANNEX A Receiver radiated spurious emissions

### Spurious emissions according to RSS-GEN

Project number: G0M-1308-3134

Manufacturer: GN Netcom A/S  
 EUT Name: Bluetooth Speakerphone  
 Model: HFS210  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 23°C, Vnom: 3.7V lithium, USB charging  
 Antenna: Rohde & Schwarz HK 116, Horizontal  
 Measurement distance: 3 m  
 Mode: RX; scan mode  
 Test Date: 2013-09-10  
 Note:

Index 15

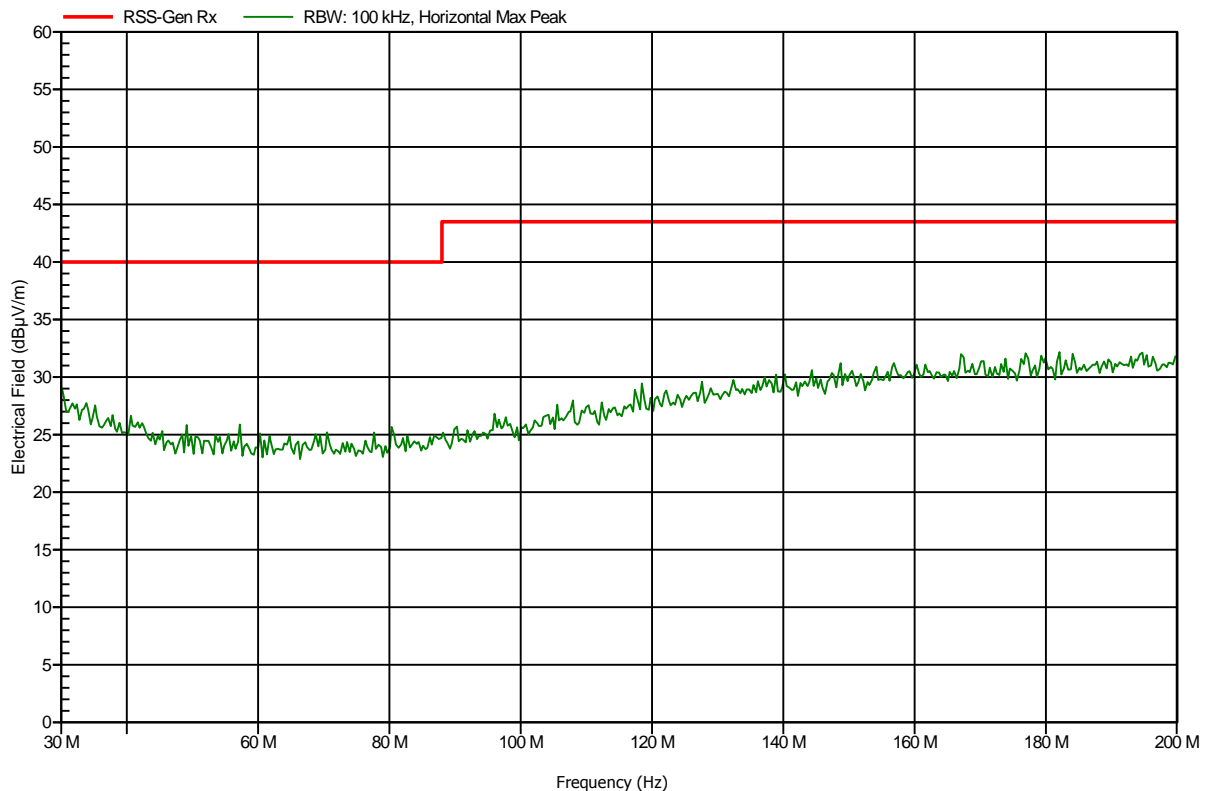


**Spurious emissions according to RSS-GEN**

Project number: G0M-1308-3134

Manufacturer:	GN Netcom A/S
EUT Name:	Bluetooth Speakerphone
Model:	HFS210
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 23°C, Vnom: 3.7V lithium, USB charging
Antenna:	Rohde & Schwarz HK 116, Vertical
Measurement distance:	3 m
Mode:	RX; scan mode
Test Date:	2013-09-10
Note:	

Index 16

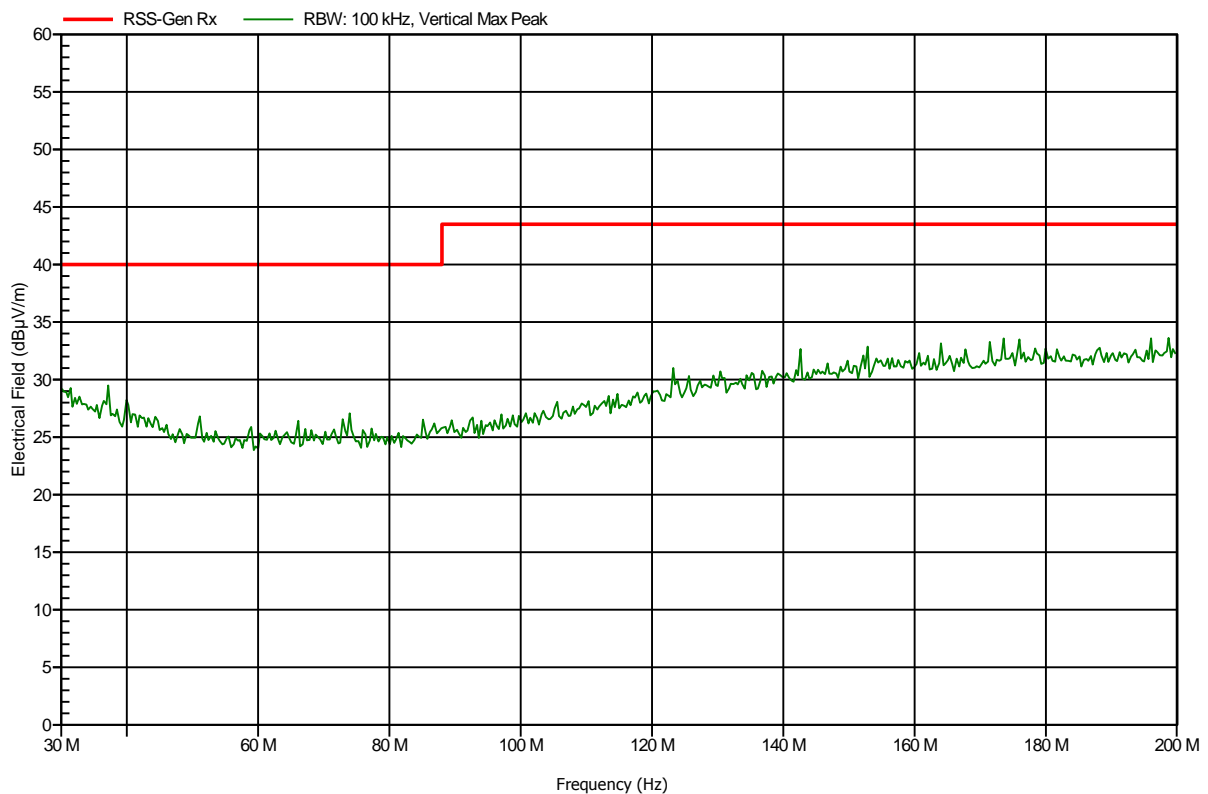


**Spurious emissions according to RSS-GEN**

Project number: G0M-1308-3134

Manufacturer: GN Netcom A/S  
 EUT Name: Bluetooth Speakerphone  
 Model: HFS210  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 23°C, Vnom: 3.7V lithium, USB charging  
 Antenna: Rohde & Schwarz HL 223, Horizontal  
 Measurement distance: 3 m  
 Mode: RX; scan mode  
 Test Date: 2013-09-10  
 Note:

Index 13

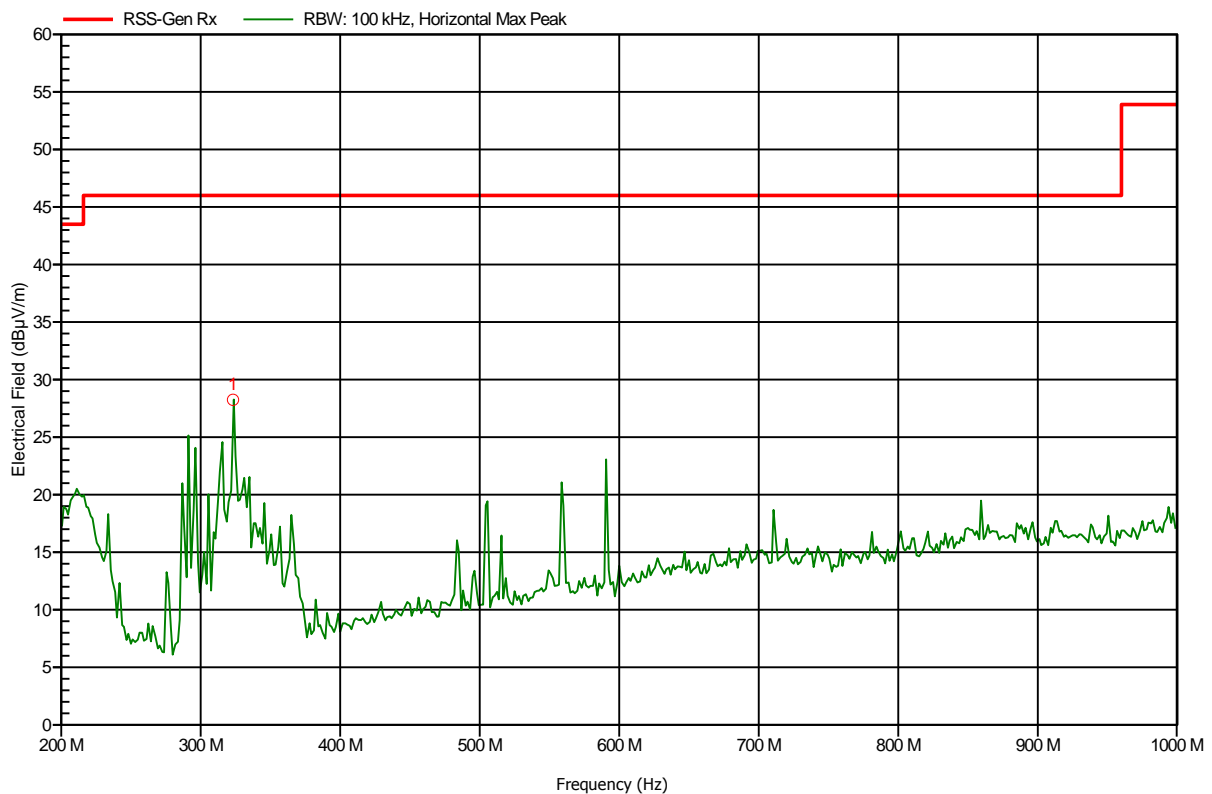

Frequency	Peak	Peak Limit	Peak Difference	Status
323.2 MHz	28.25 dBµV/m	46 dBµV/m	-17.75 dB	Pass




**Spurious emissions according to RSS-GEN**

Project number: G0M-1308-3134

Manufacturer: GN Netcom A/S  
 EUT Name: Bluetooth Speakerphone  
 Model: HFS210  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 23°C, Vnom: 3.7V lithium, USB charging  
 Antenna: Rohde & Schwarz HL 223, Vertical  
 Measurement distance: 3 m  
 Mode: RX; scan mode  
 Test Date: 2013-09-10  
 Note:

Index 14

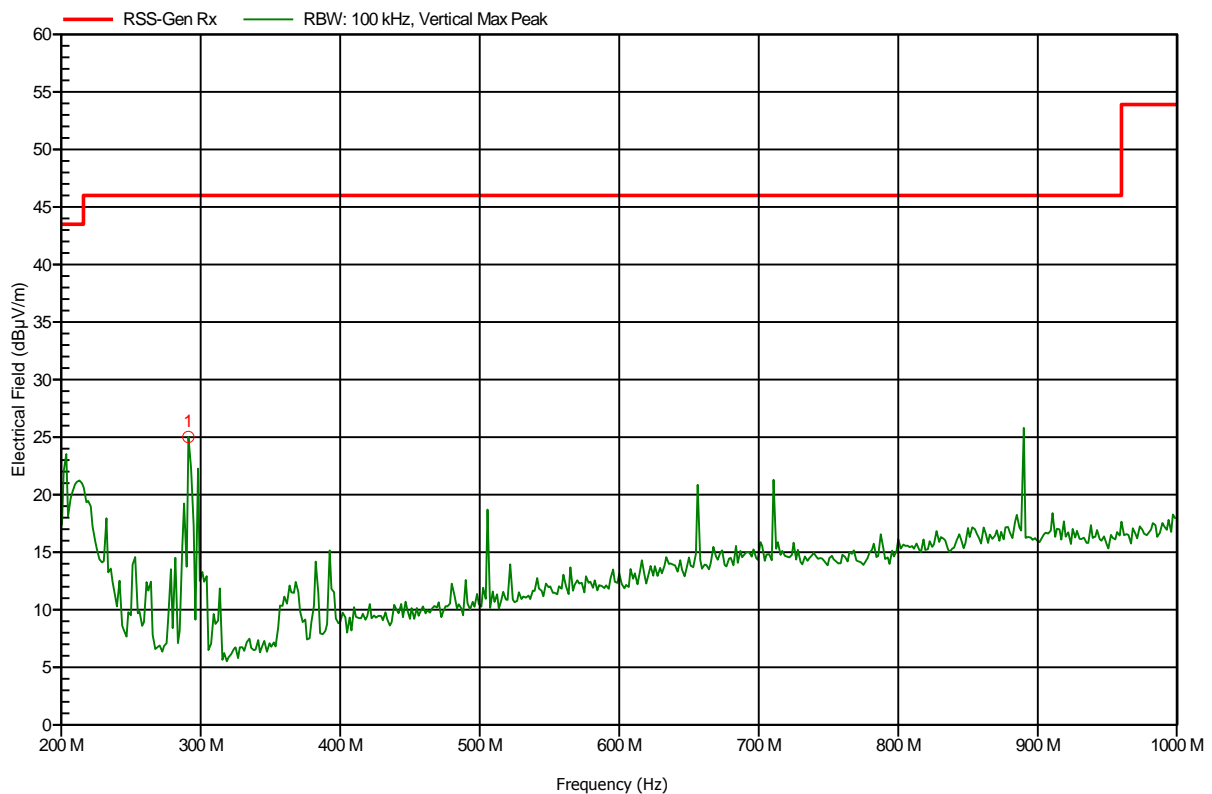


Frequency	Peak	Peak Limit	Peak Difference	Status
291.2 MHz	25.01 dBµV/m	46 dBµV/m	-20.99 dB	Pass

**Spurious emissions according to RSS-GEN**

Project number: G0M-1308-3134

Manufacturer:	GN Netcom A/S
EUT Name:	Bluetooth Speakerphone
Model:	HFS210
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 23°C, Vnom: 3.7V lithium, USB charging
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	3 m
Mode:	RX; scan mode
Test Date:	2013-09-10
Note:	

Index 11

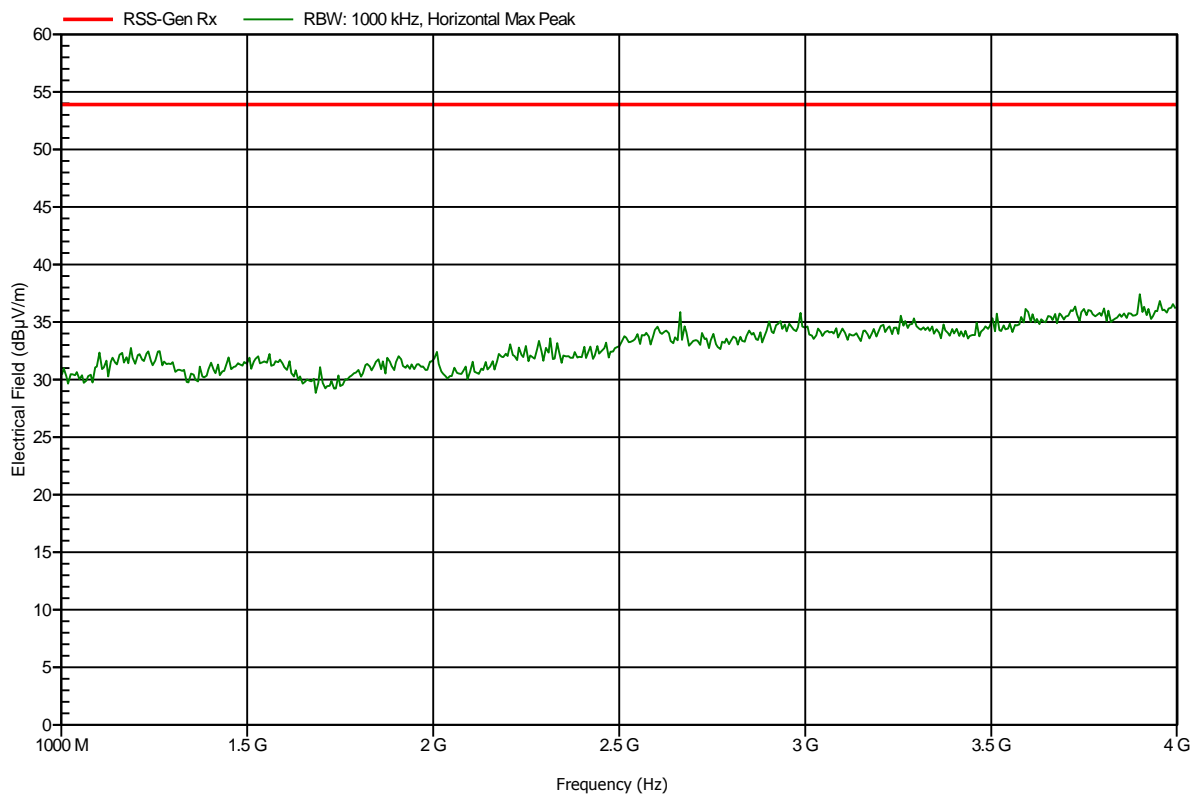


**Spurious emissions according to RSS-GEN**

Project number: G0M-1308-3134

Manufacturer: GN Netcom A/S  
 EUT Name: Bluetooth Speakerphone  
 Model: HFS210  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 23°C, Vnom: 3.7V lithium, USB charging  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 3 m  
 Mode: RX; scan mode  
 Test Date: 2013-09-10  
 Note:

Index 9

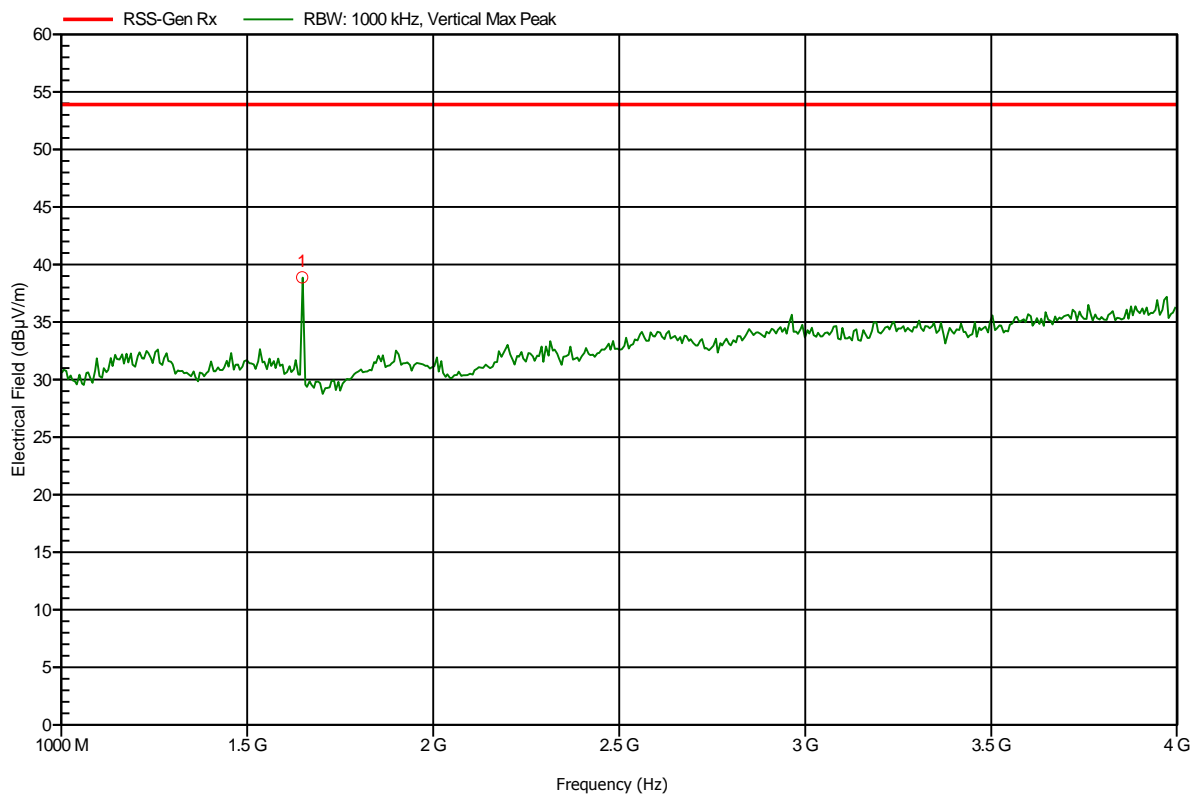


Frequency	Peak	Peak Limit	Peak Difference	Status
1.648 GHz	38.88 dBµV/m	53.9 dBµV/m	-15.02 dB	Pass

**Spurious emissions according to RSS-GEN**

Project number: G0M-1308-3134

Manufacturer:	GN Netcom A/S
EUT Name:	Bluetooth Speakerphone
Model:	HFS210
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 23°C, Vnom: 3.7V lithium, USB charging
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	3 m
Mode:	RX; scan mode
Test Date:	2013-09-10
Note:	

Index 12

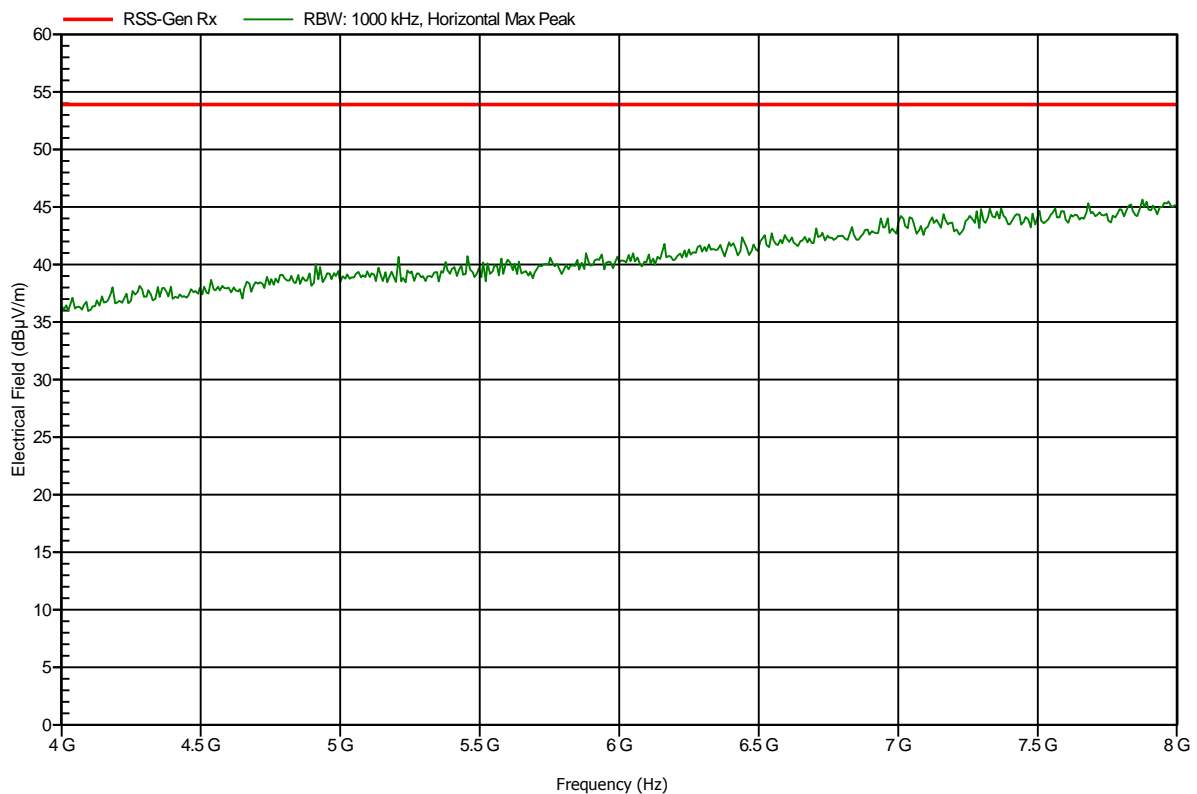

**Spurious emissions according to RSS-GEN**

Project number: G0M-1308-3134

Manufacturer:	GN Netcom A/S
EUT Name:	Bluetooth Speakerphone
Model:	HFS210
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 23°C, Vnom: 3.7V lithium, USB charging
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	3 m
Mode:	RX; scan mode
Test Date:	2013-09-10
Note:	

Index 10

