




Appendix B

Peak Output Power




Marker 1 [T1]	RBW	1 MHz	RF Att	50 dB
Ref Lvl	-2.37 dBm	VBW	1 MHz	
25 dBm	2.40213327 GHz	SWT	5 ms	Unit dBm

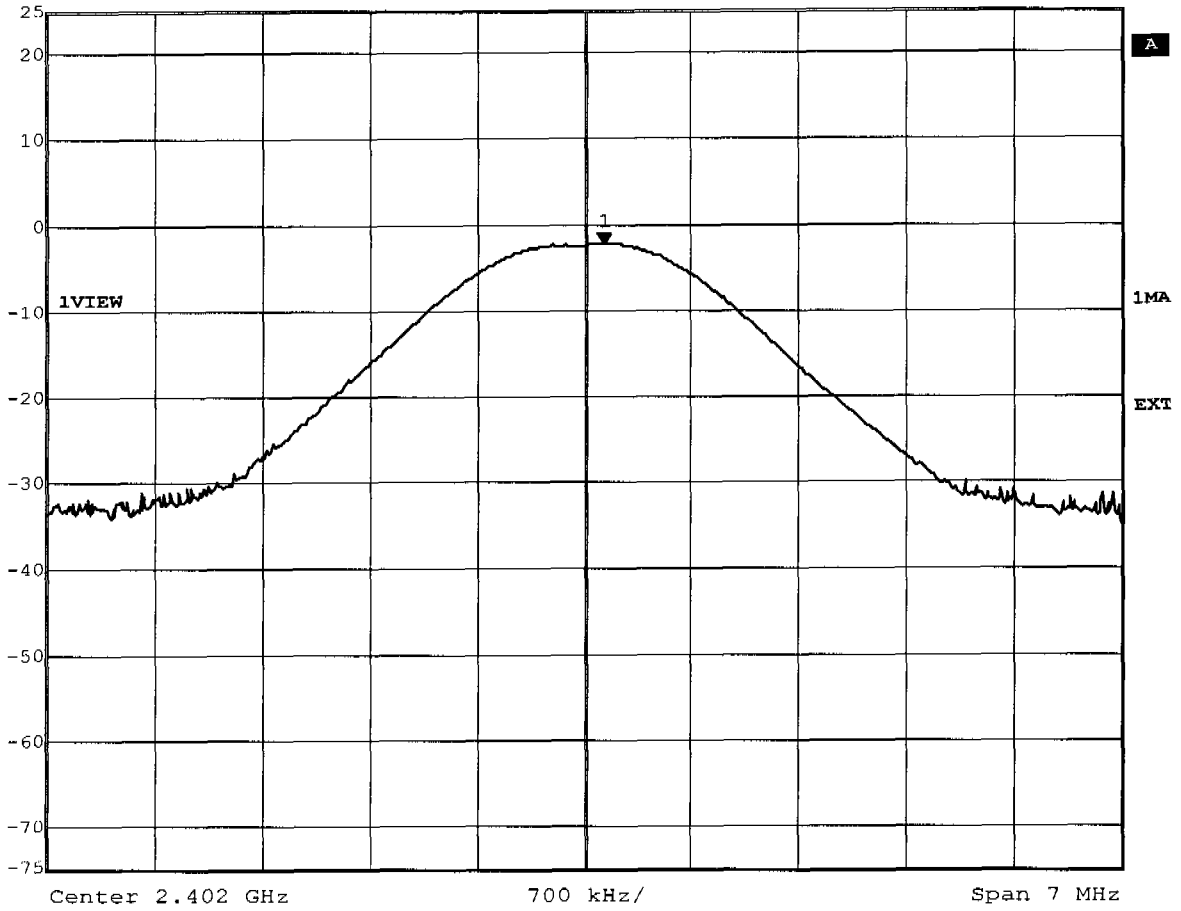

Title: Peak Output Power conducted Ch.: 0
Comment A: Siemens HHB-600
Date: 21.JAN.2004 11:20:32




Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	50 dB
25 dBm	-2.14 dBm	VBW	1 MHz		
	2.44117535 GHz	SWT	5 ms	Unit	dBm

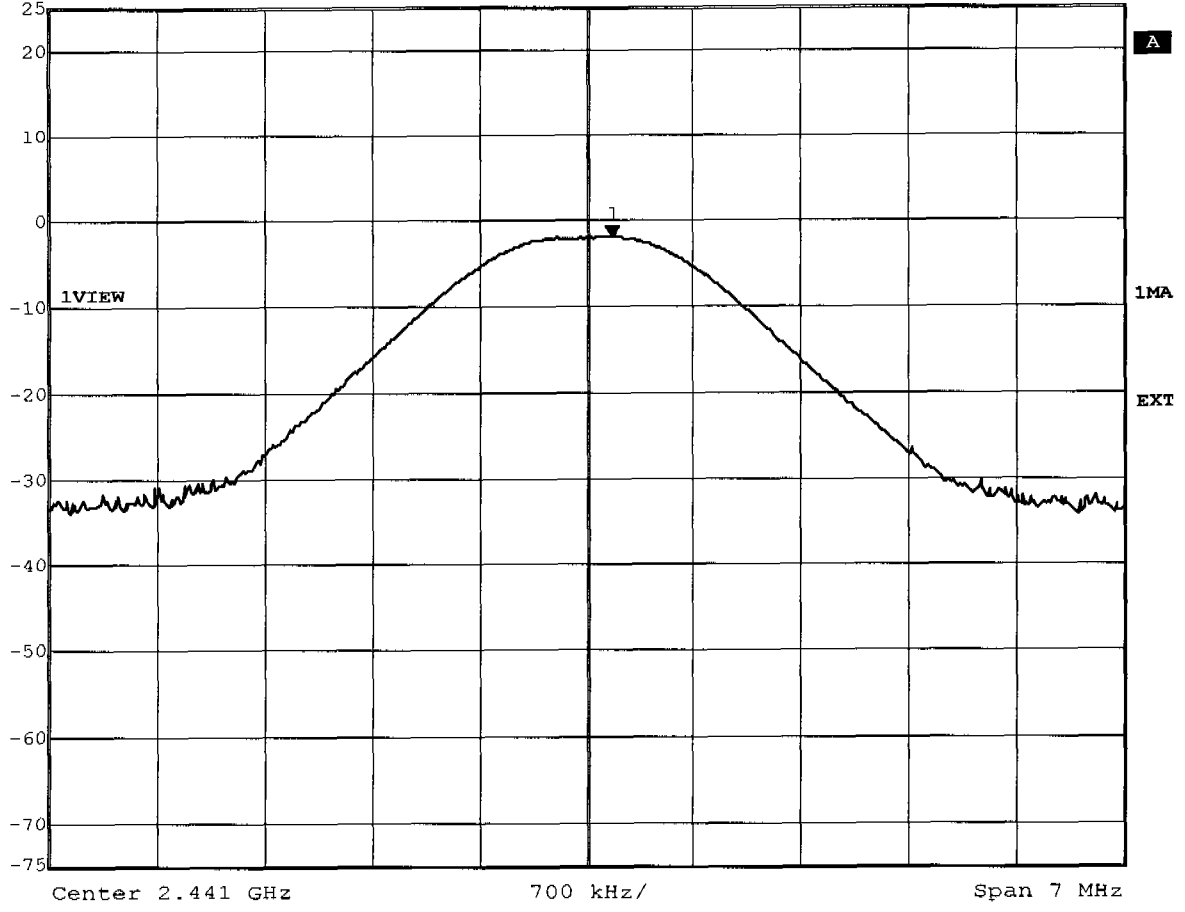

Title: Peak Output Power conducted Ch.: 39
Comment A: Siemens HHB-600
Date: 21.JAN.2004 11:21:17




Marker 1 [T1]	RBW	1 MHz	RF Att	50 dB
Ref Lvl	-2.04 dBm	VBW	1 MHz	
25 dBm	2.48014729 GHz	SWT	5 ms	Unit dBm

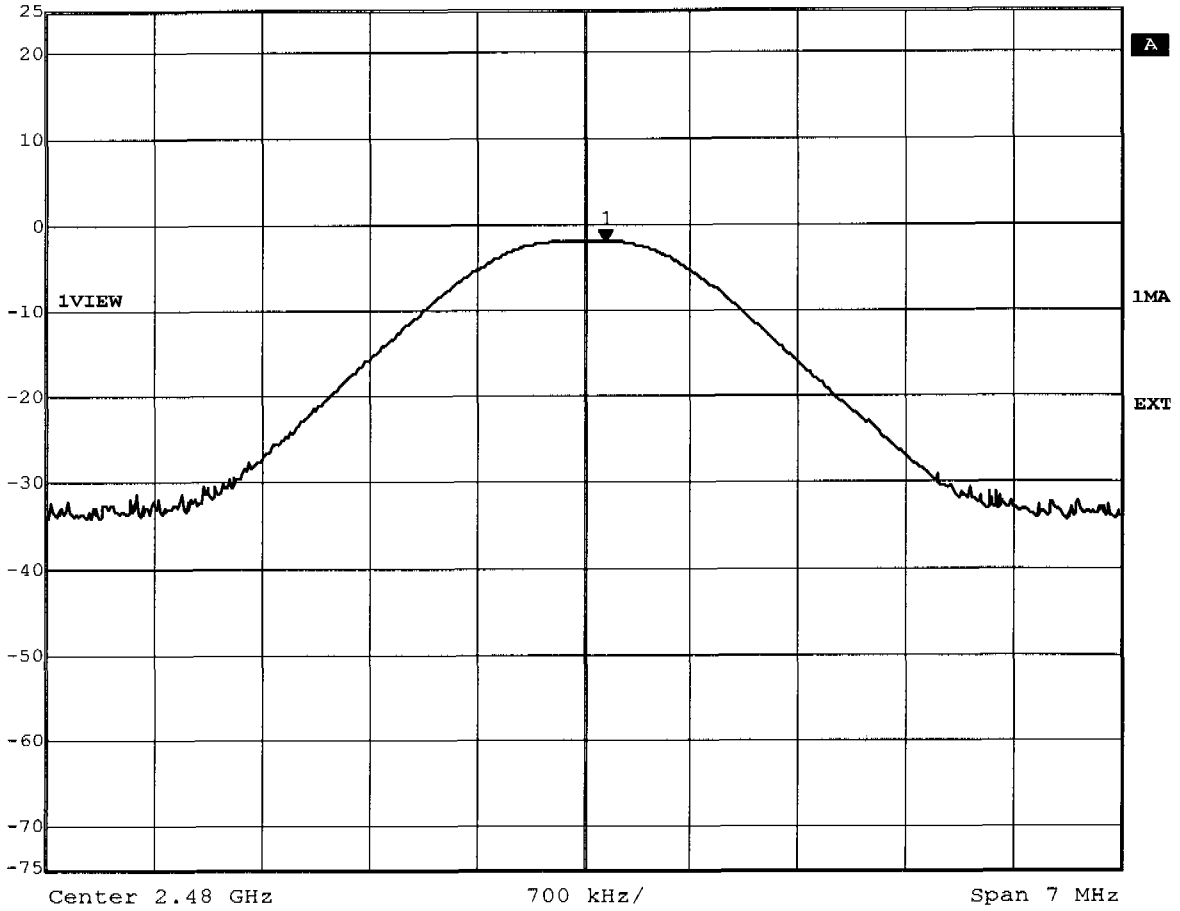

Title: Peak Output Power conducted Ch.: 78
Comment A: Siemens HHB-600
Date: 21.JAN.2004 11:22:09


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Bluetooth Headset Classic / 2402 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: 1.97dBm, RBW: 5MHz

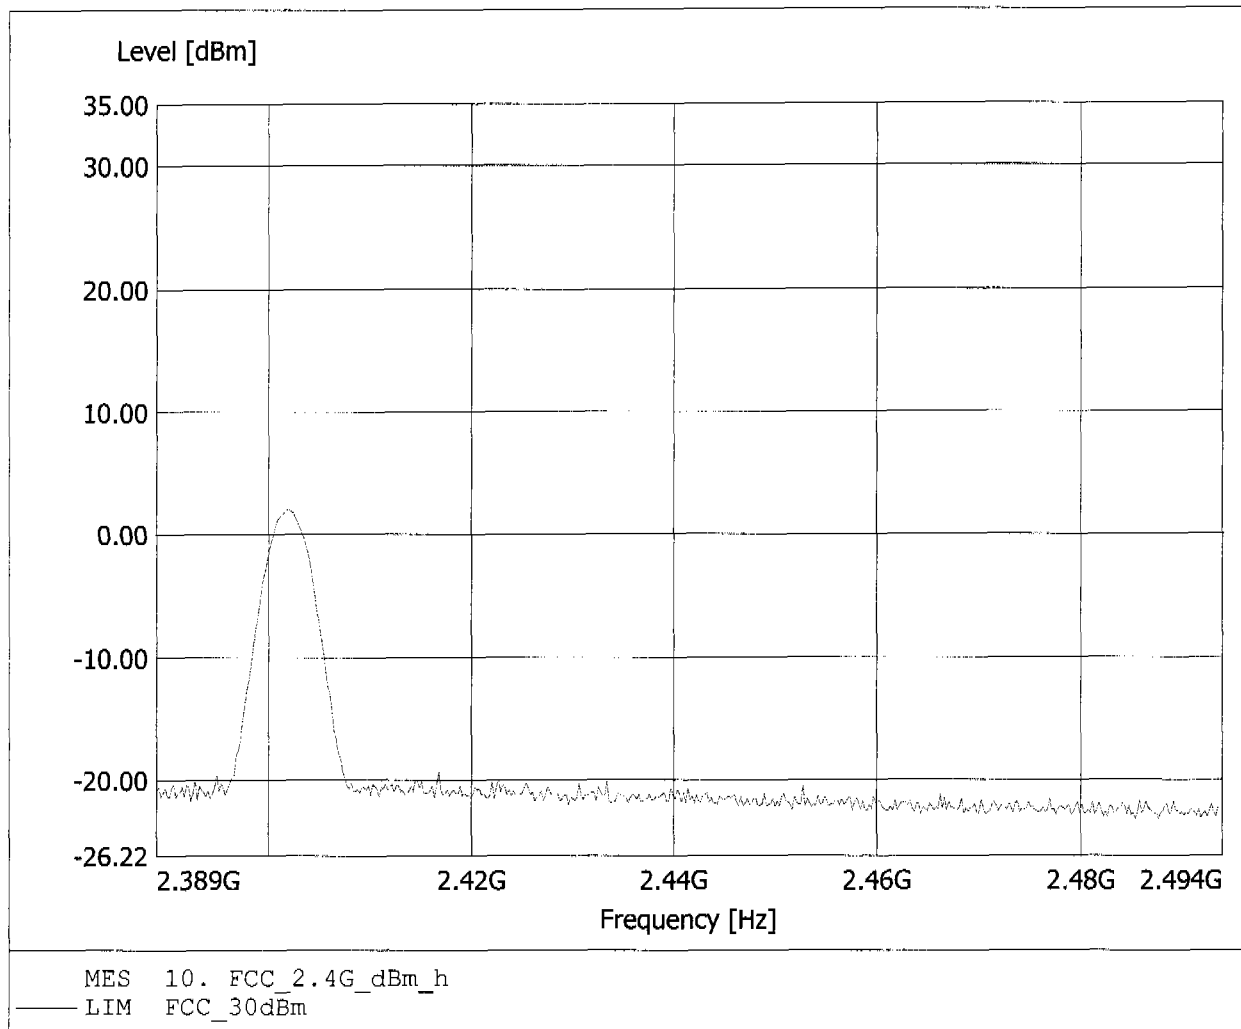


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Bluetooth Headset Classic / 2402 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: -0.09dBm, RBW: 5MHz

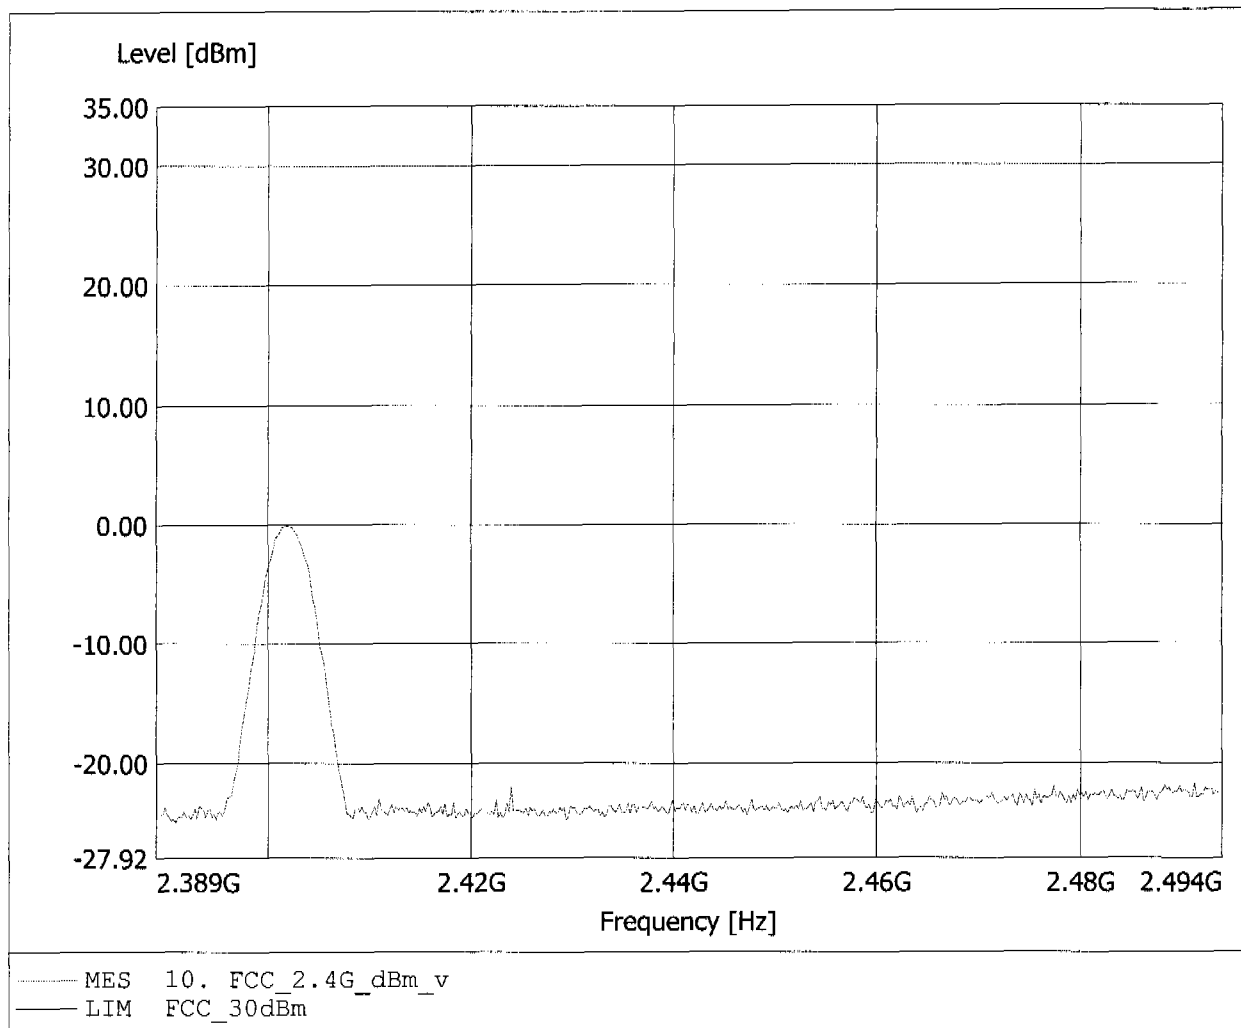


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Bluetooth Headset Classic / 2441 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -0.06dBm, RBW: 5MHz

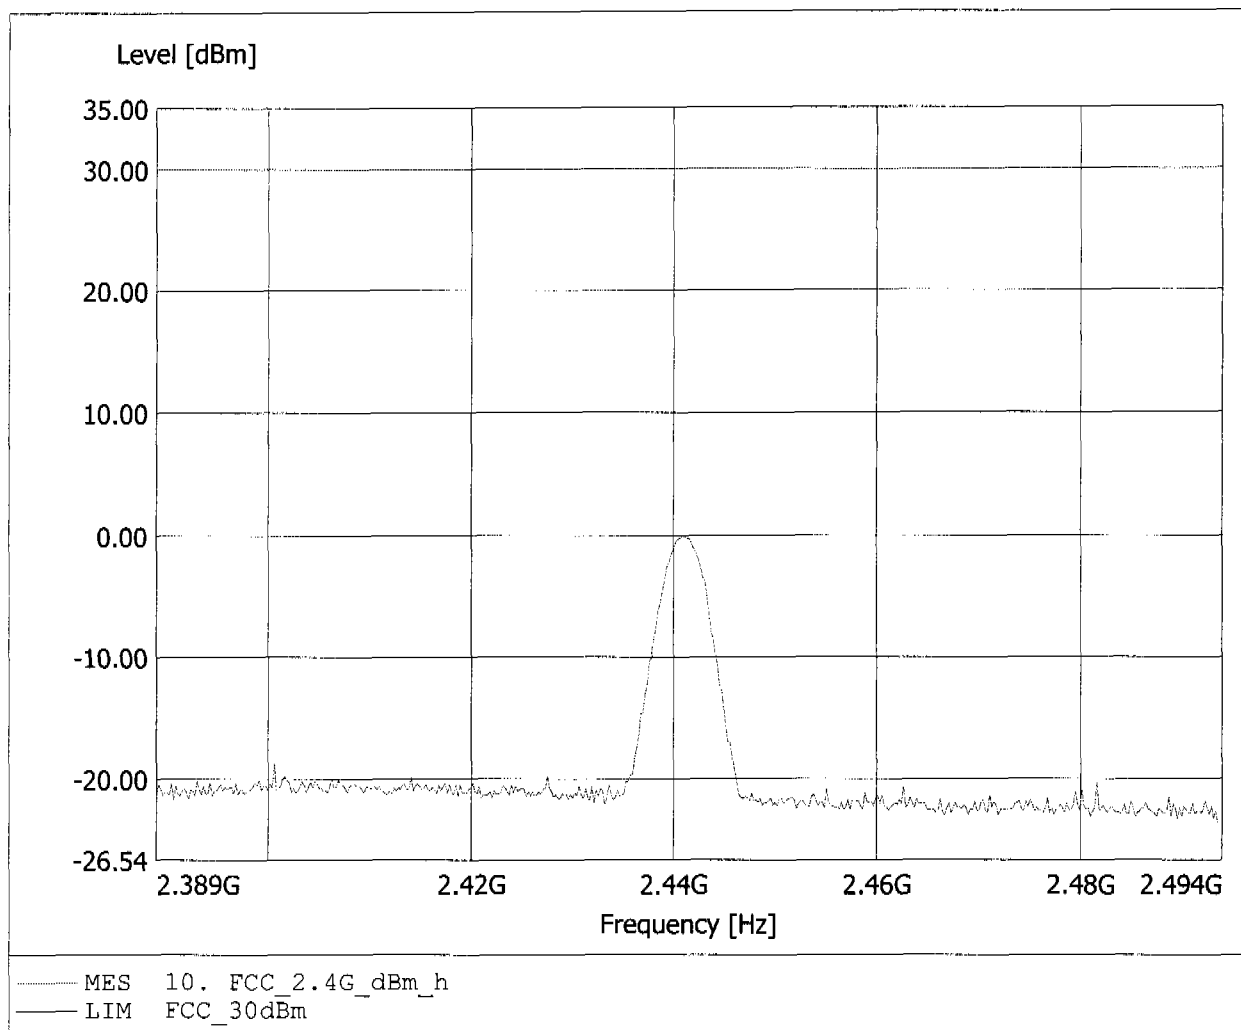


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Bluetooth Headset Classic / 2441 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -1.60dBm, RBW: 5MHz

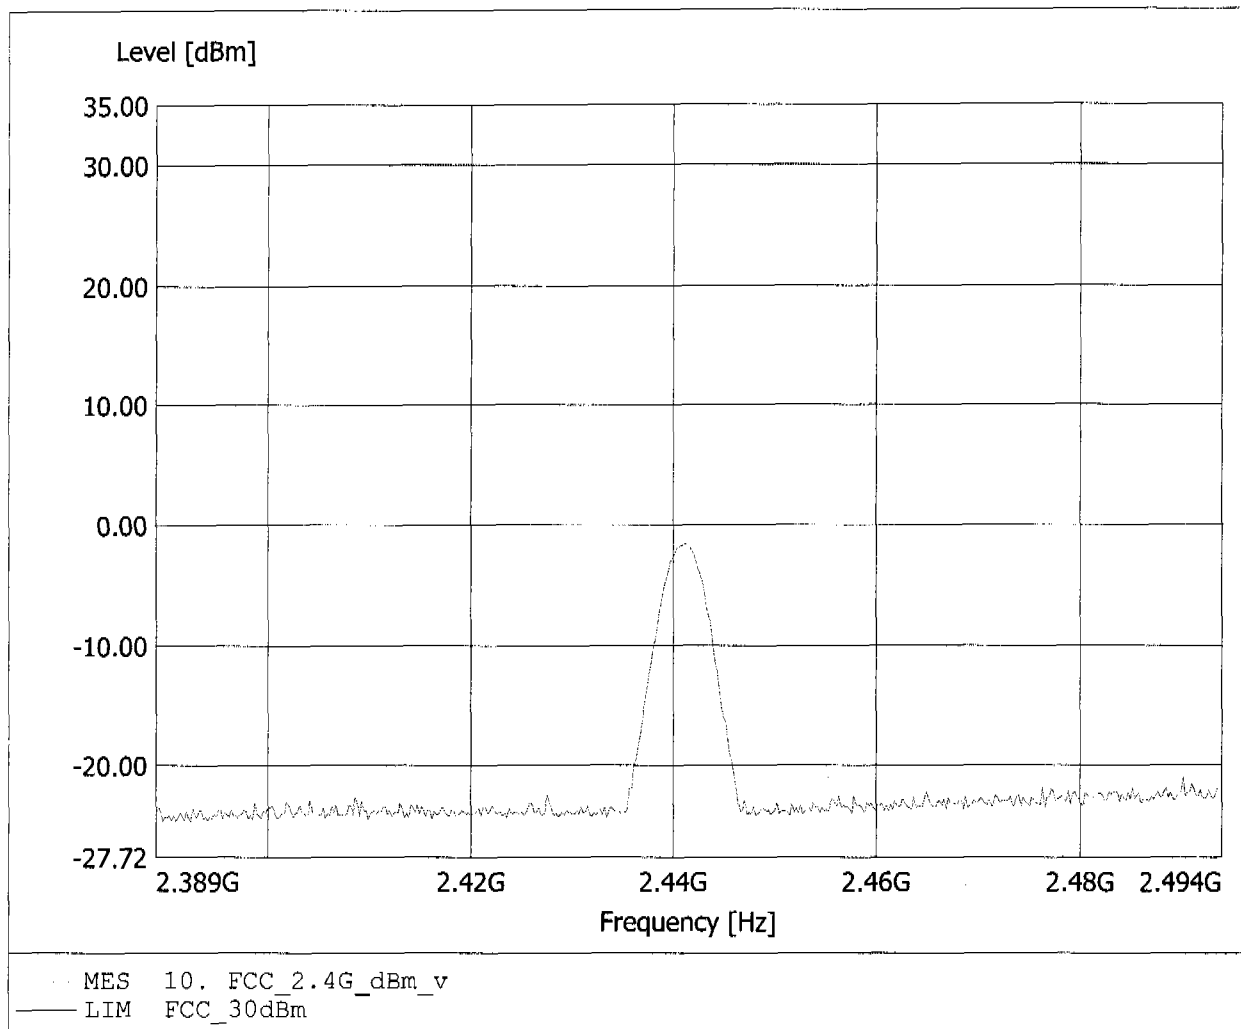


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Bluetooth Headset Classic / 2480 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: -2.43dBm, RBW: 5MHz

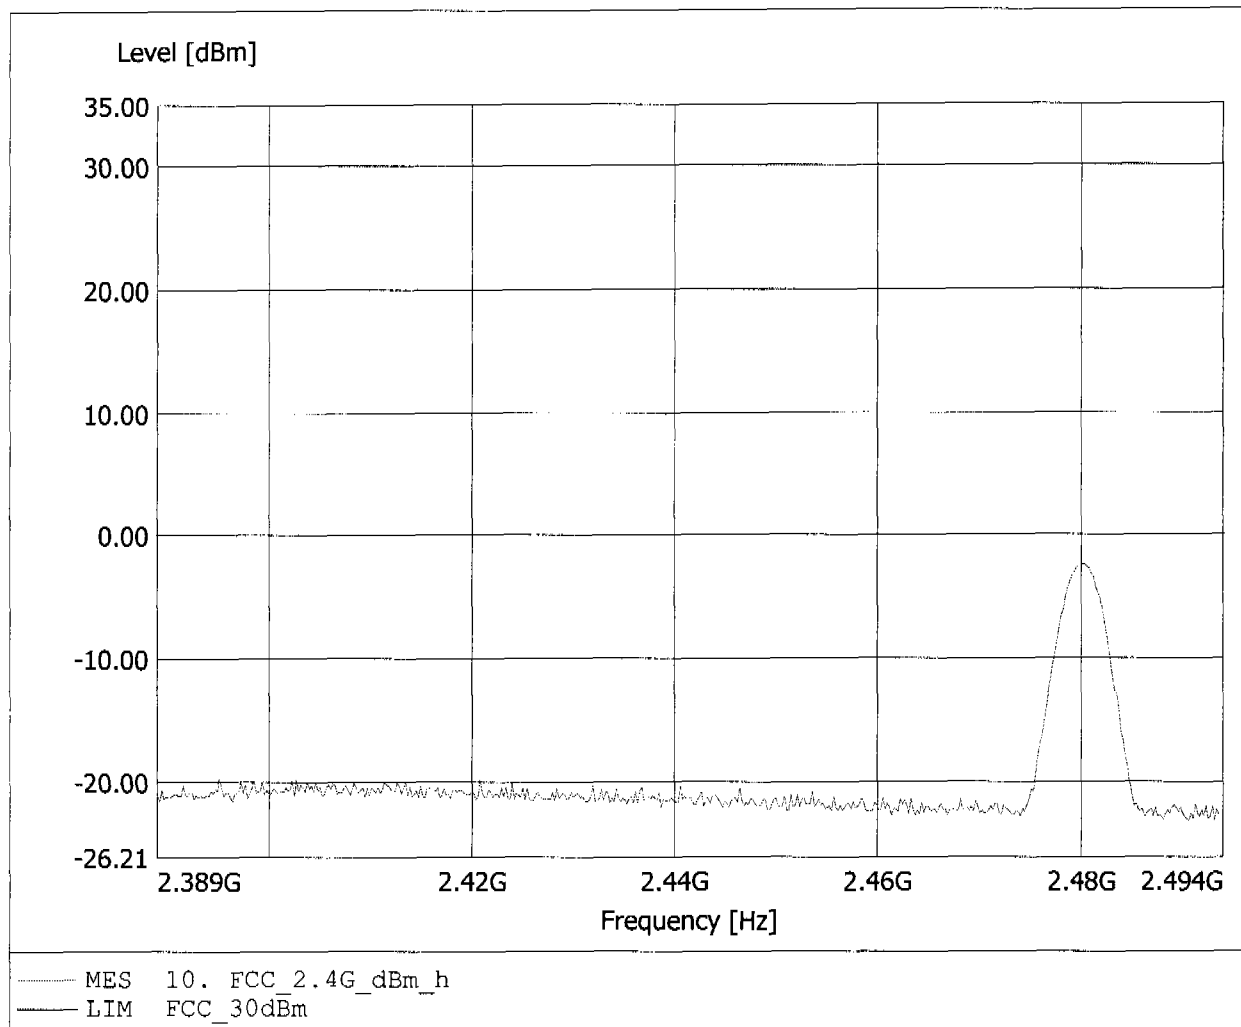


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Bluetooth Headset Classic / 2480 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: -0.40dBm, RBW: 5MHz

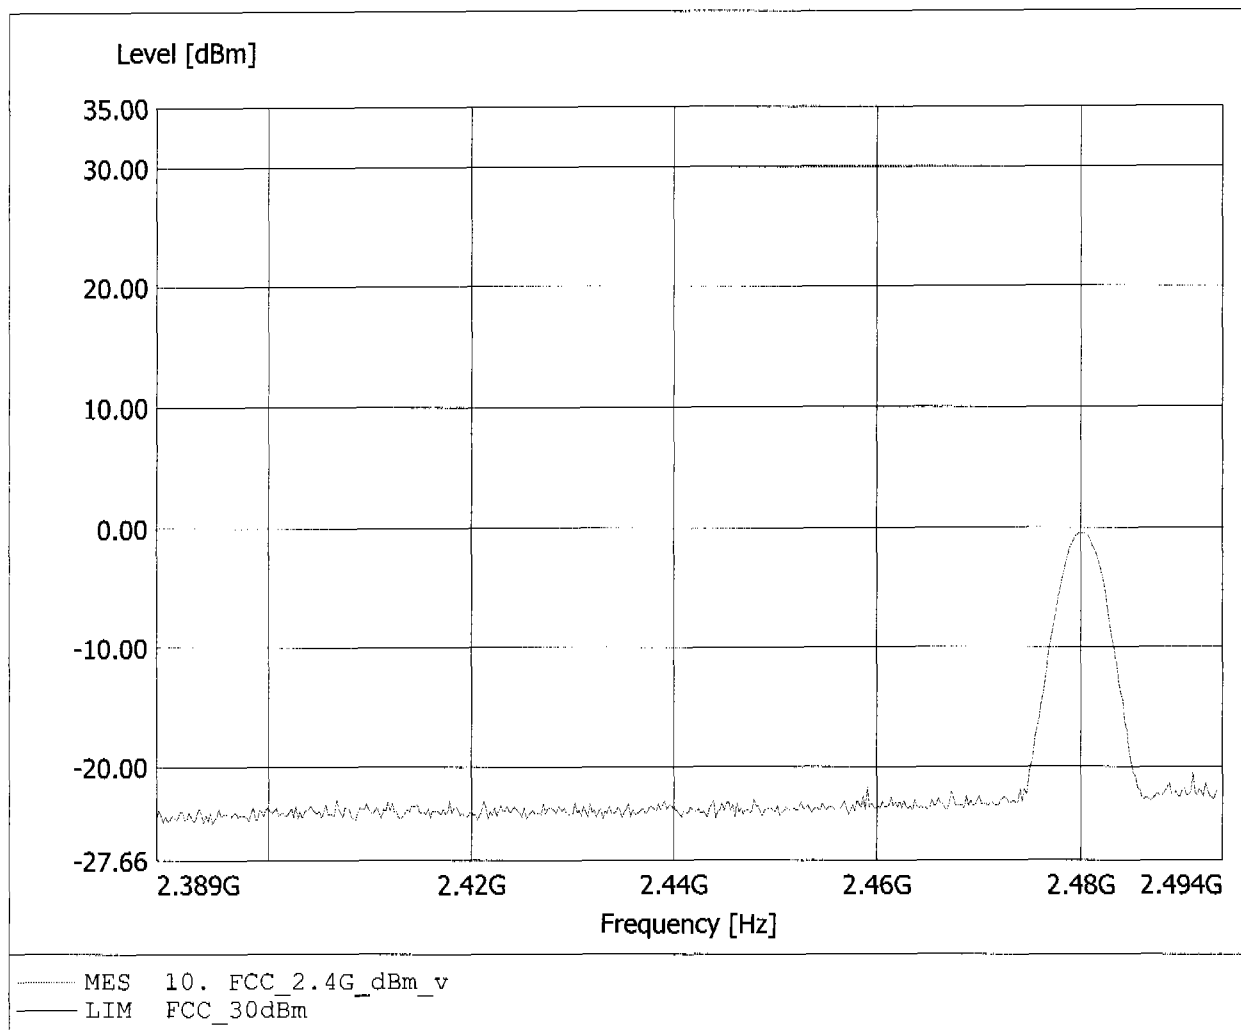


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Bluetooth Headset Classic / 2402 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V -15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: 1.62dBm, RBW: 5MHz

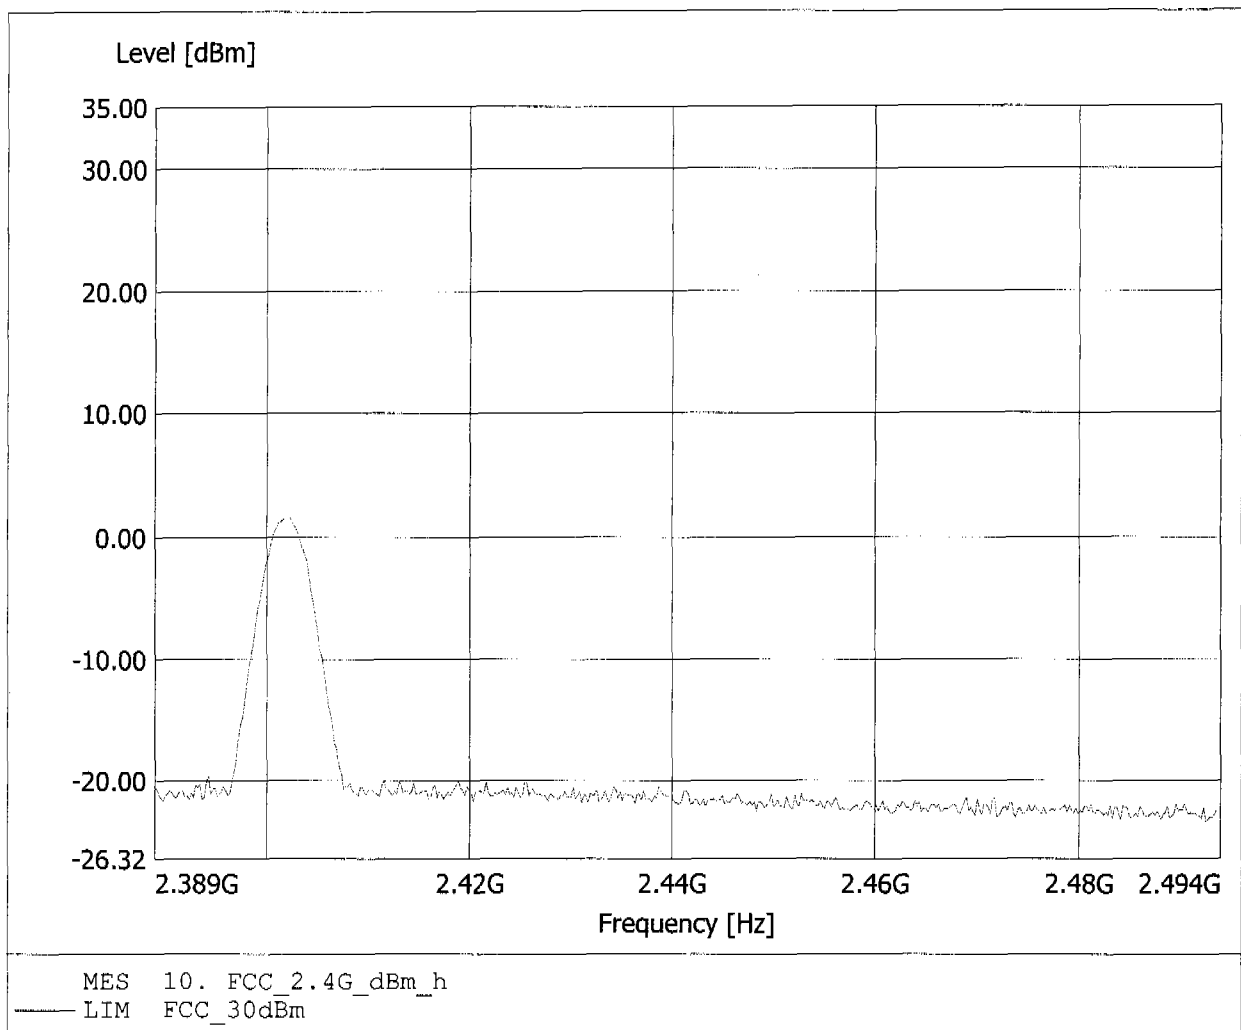


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Bluetooth Headset Classic / 2402 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V -15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: 1.21dBm, RBW: 5MHz

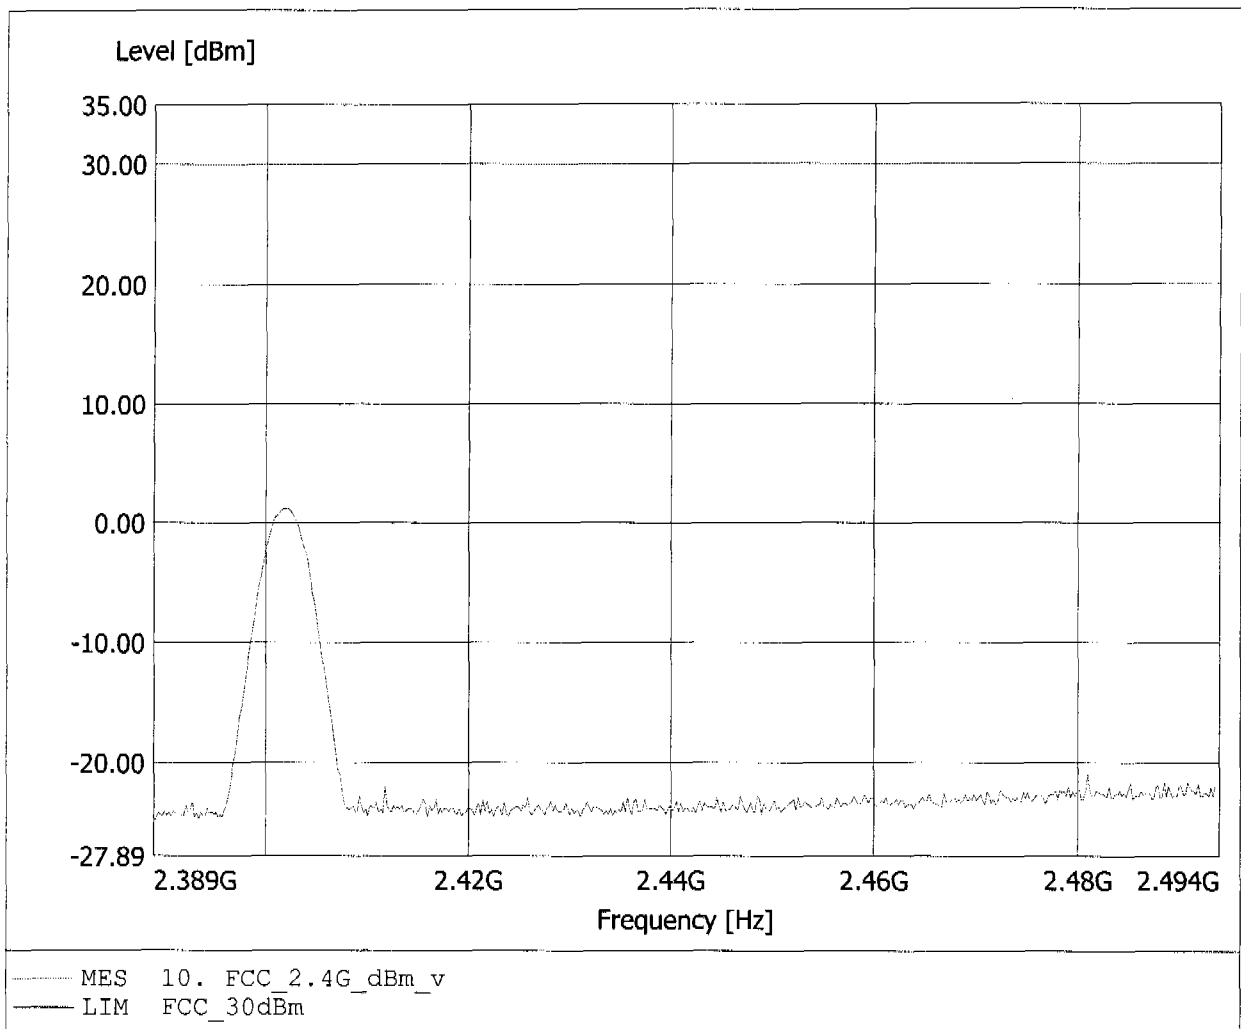


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Bluetooth Headset Classic / 2441 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V -15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -0.32dBm, RBW: 5MHz

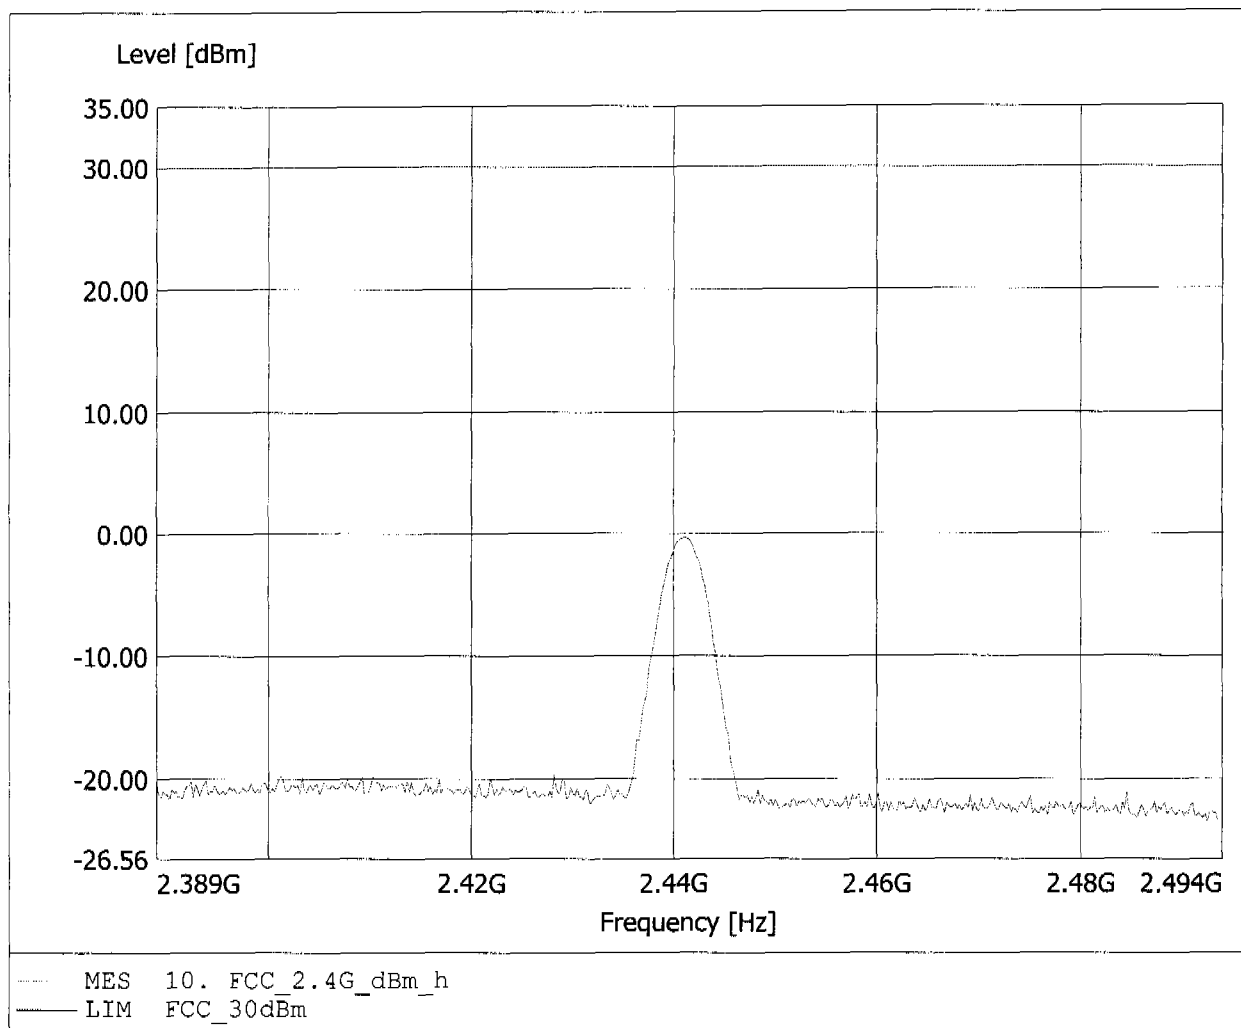


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Bluetooth Headset Classic / 2441 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V -15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -0.60dBm, RBW: 5MHz

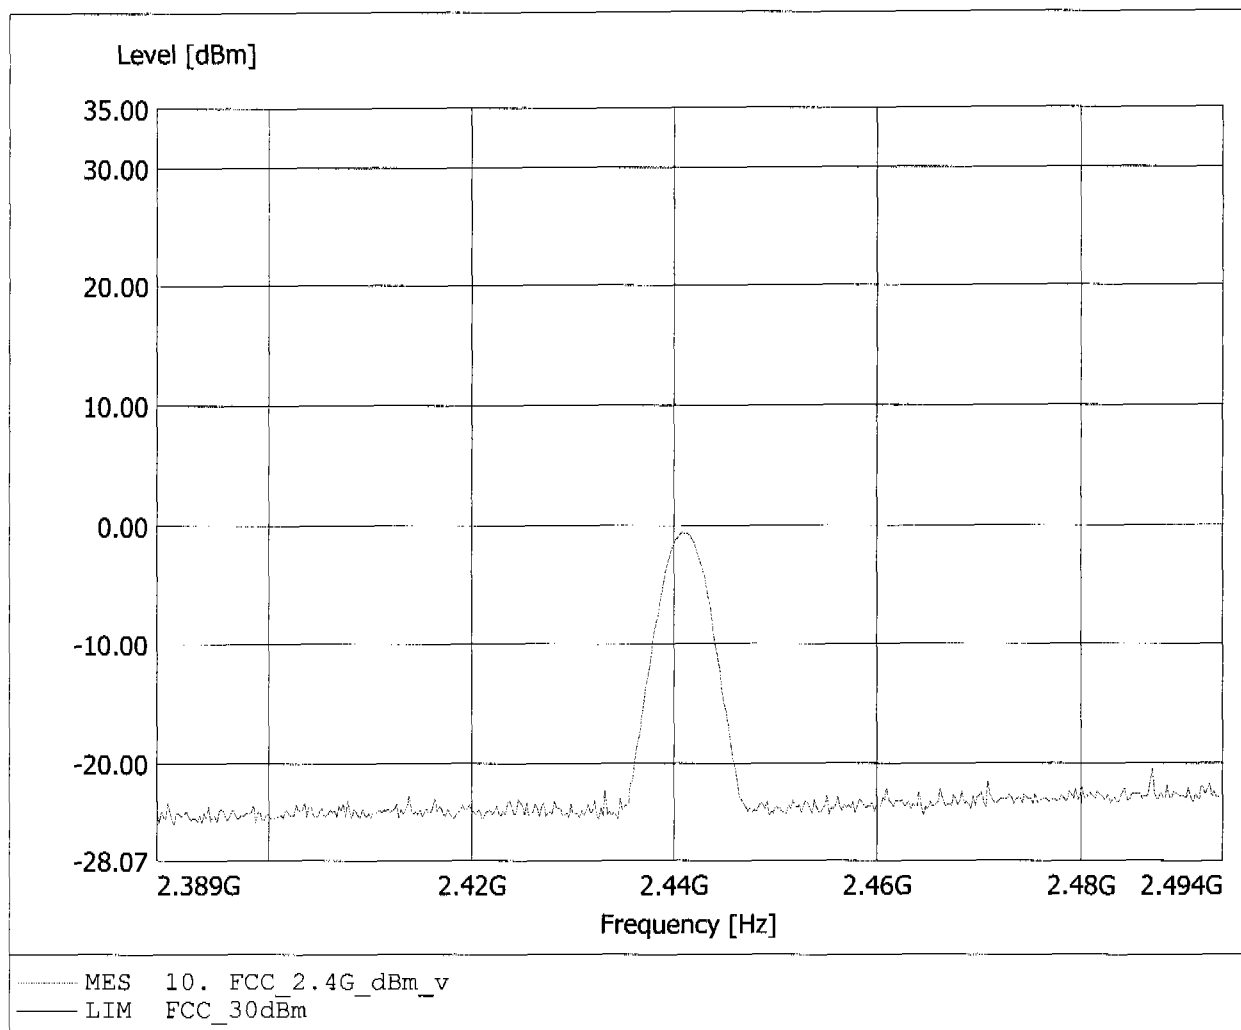


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Bluetooth Headset Classic / 2480 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V -15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: -2.29dBm, RBW: 5MHz

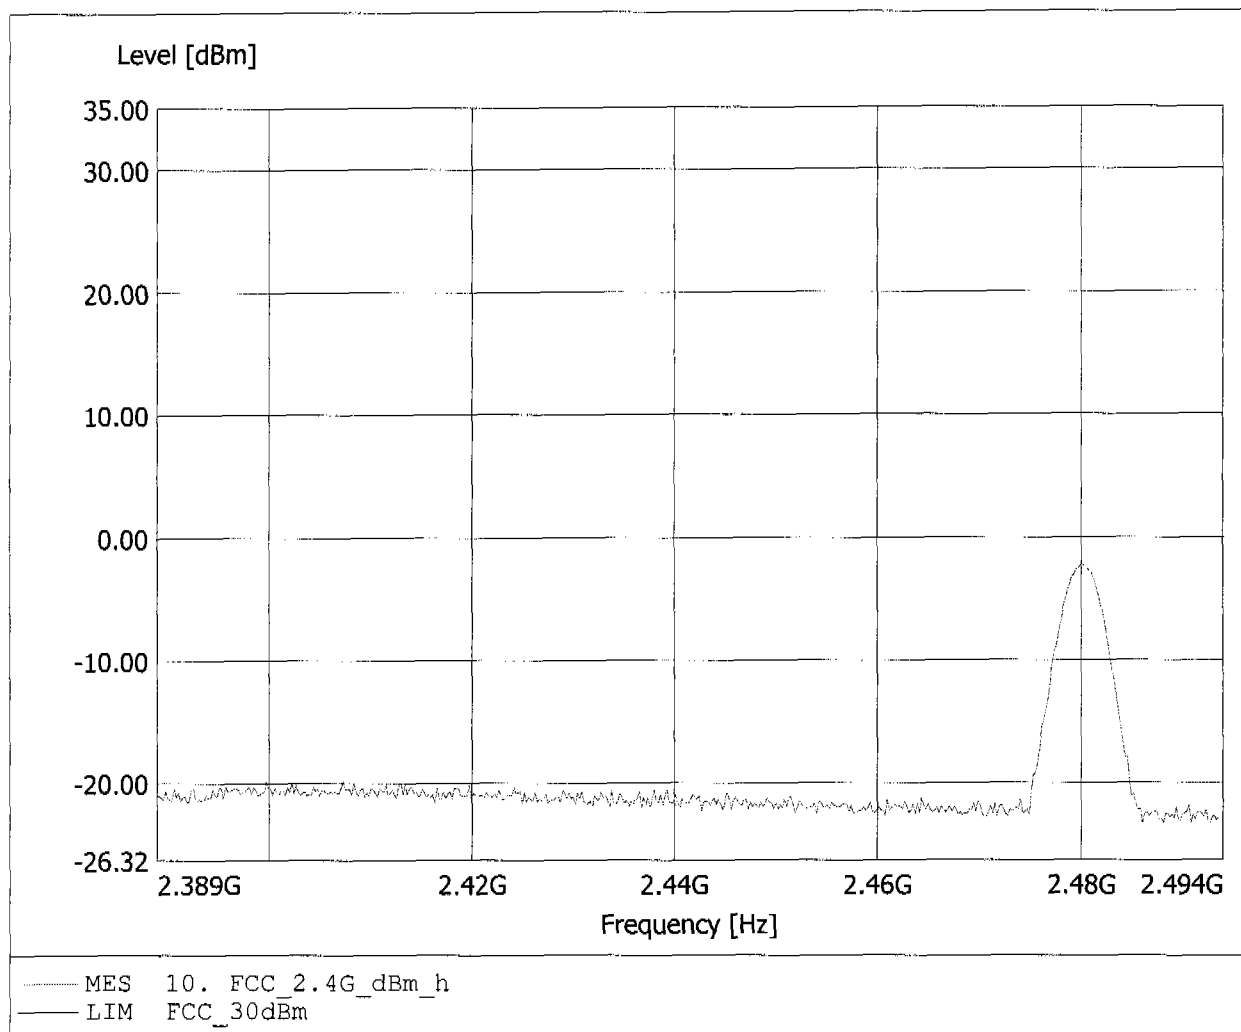


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Bluetooth Headset Classic / 2480 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V -15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: -0.91dBm, RBW: 5MHz

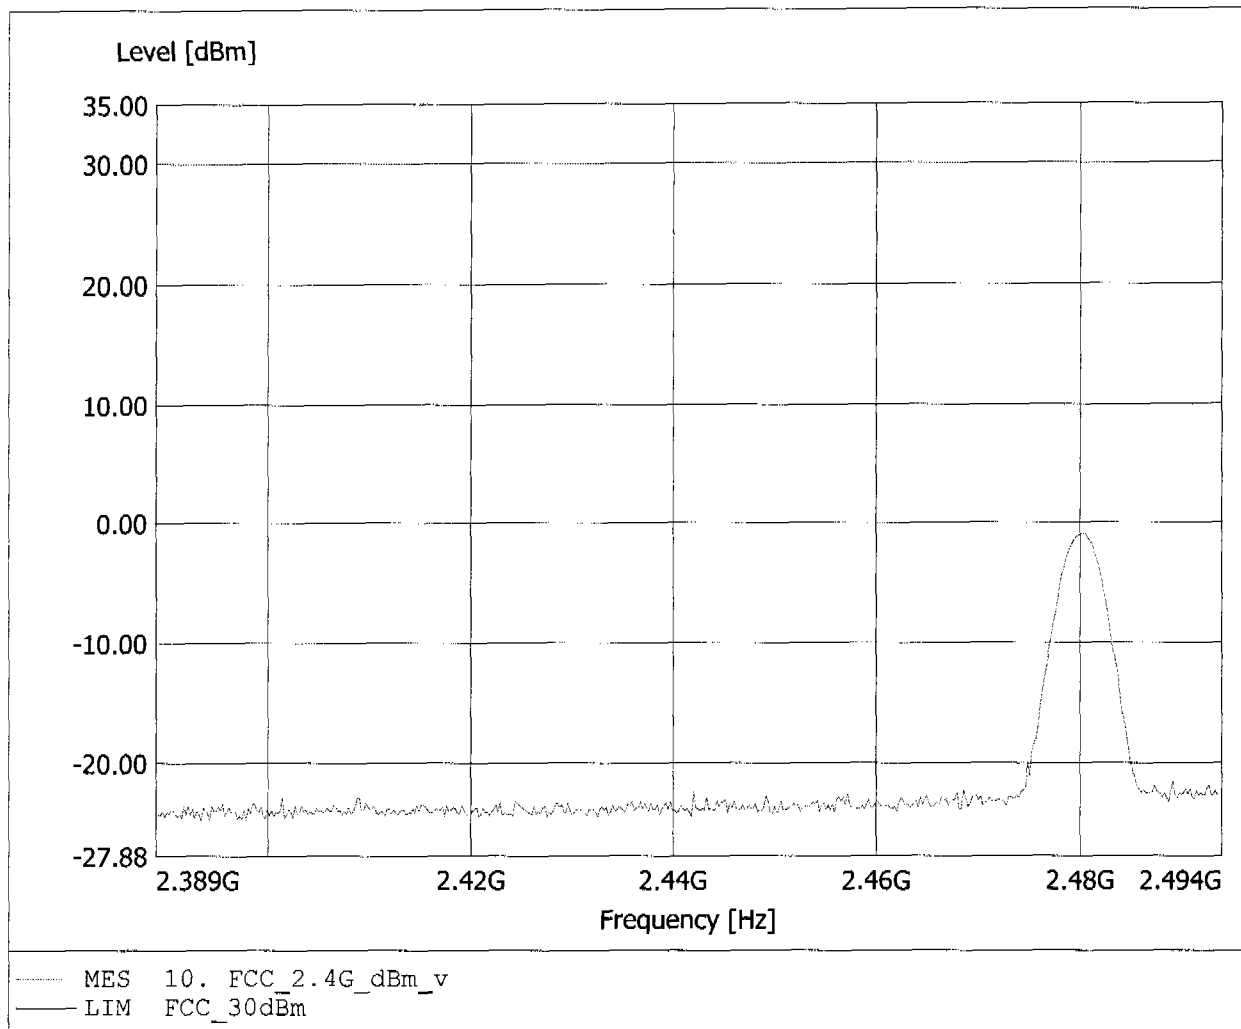


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Bluetooth Headset Classic / 2402 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V +15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: 1.36dBm, RBW: 5MHz

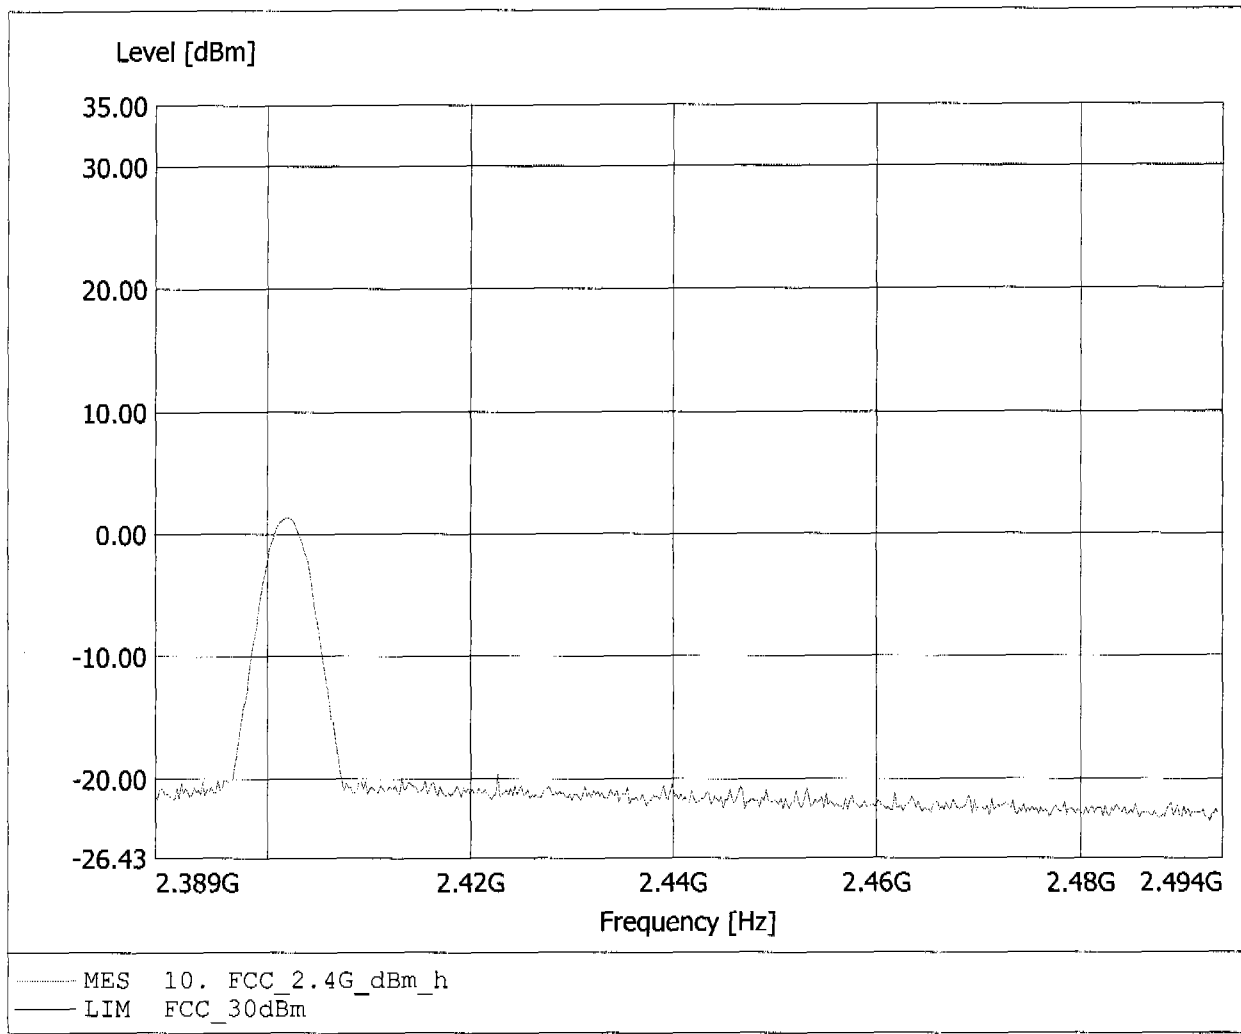


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Bluetooth Headset Classic / 2402 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V +15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: 1.15dBm, RBW: 5MHz

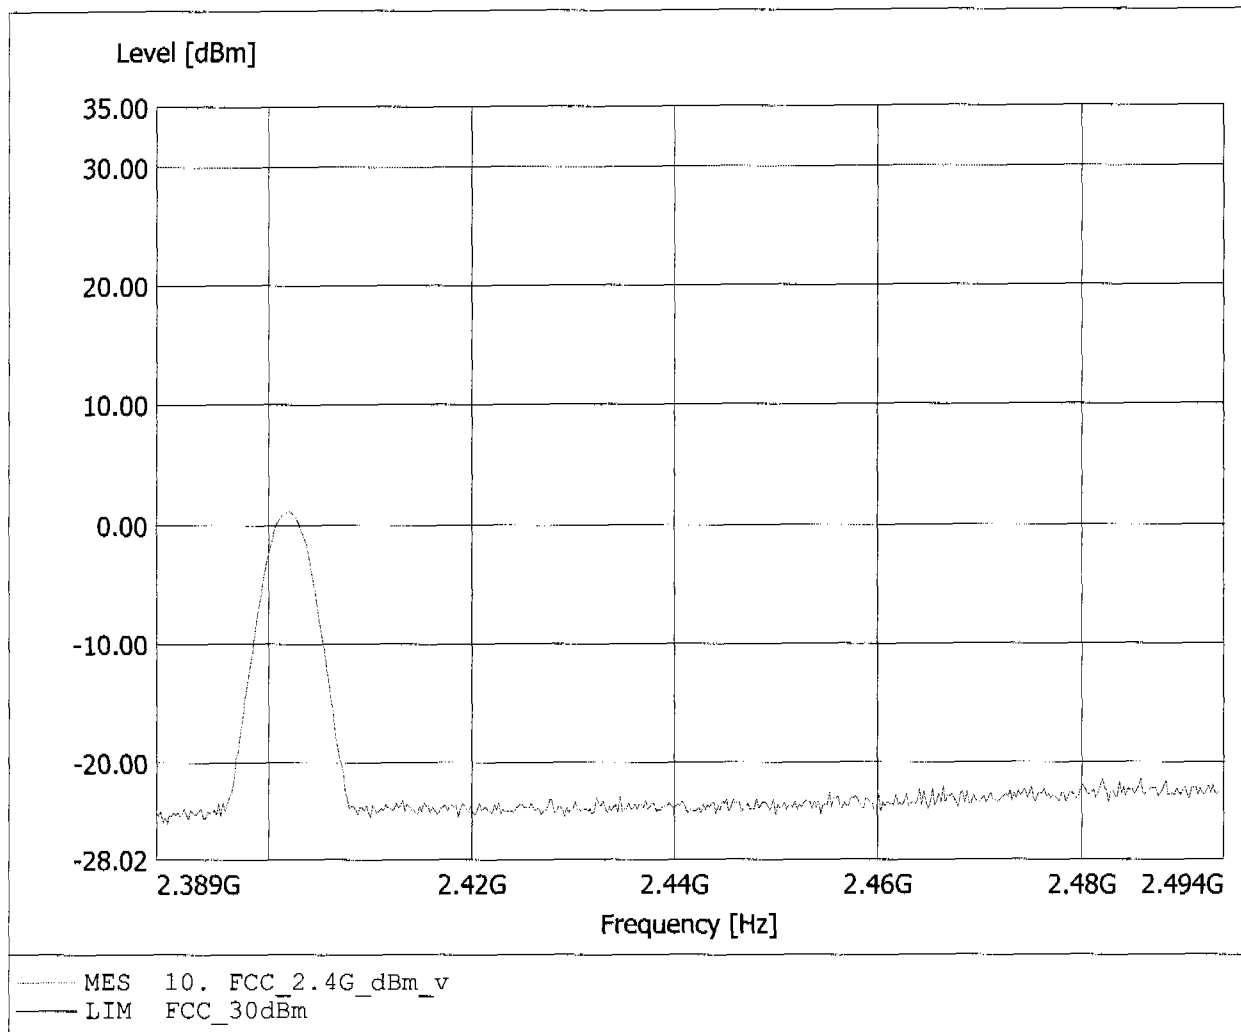


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Bluetooth Headset Classic / 2441 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V +15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -0.19dBm, RBW: 5MHz

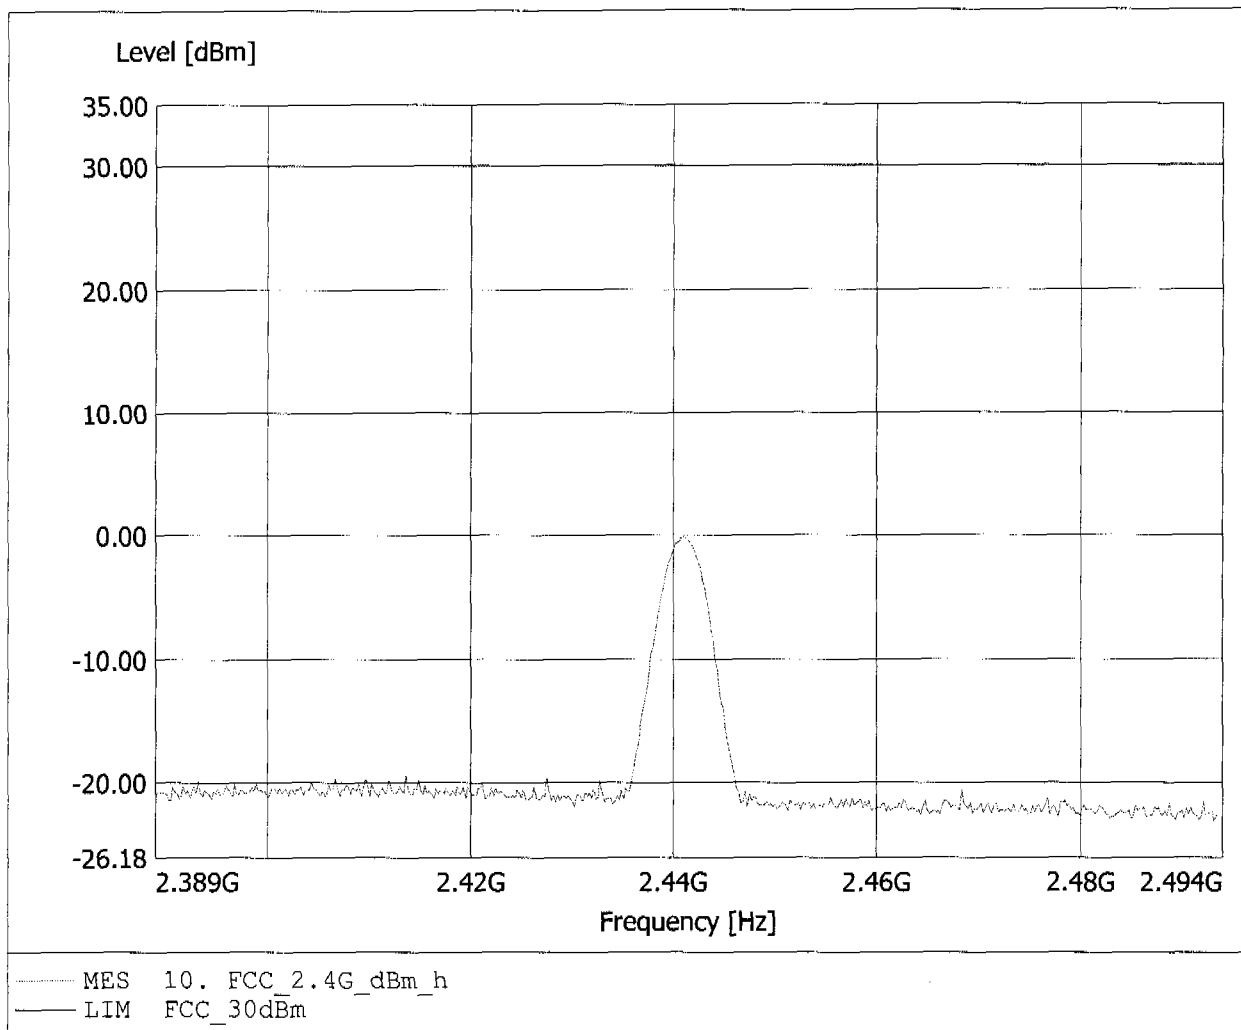


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Bluetooth Headset Classic / 2441 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V +15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -0.67dBm, RBW: 5MHz

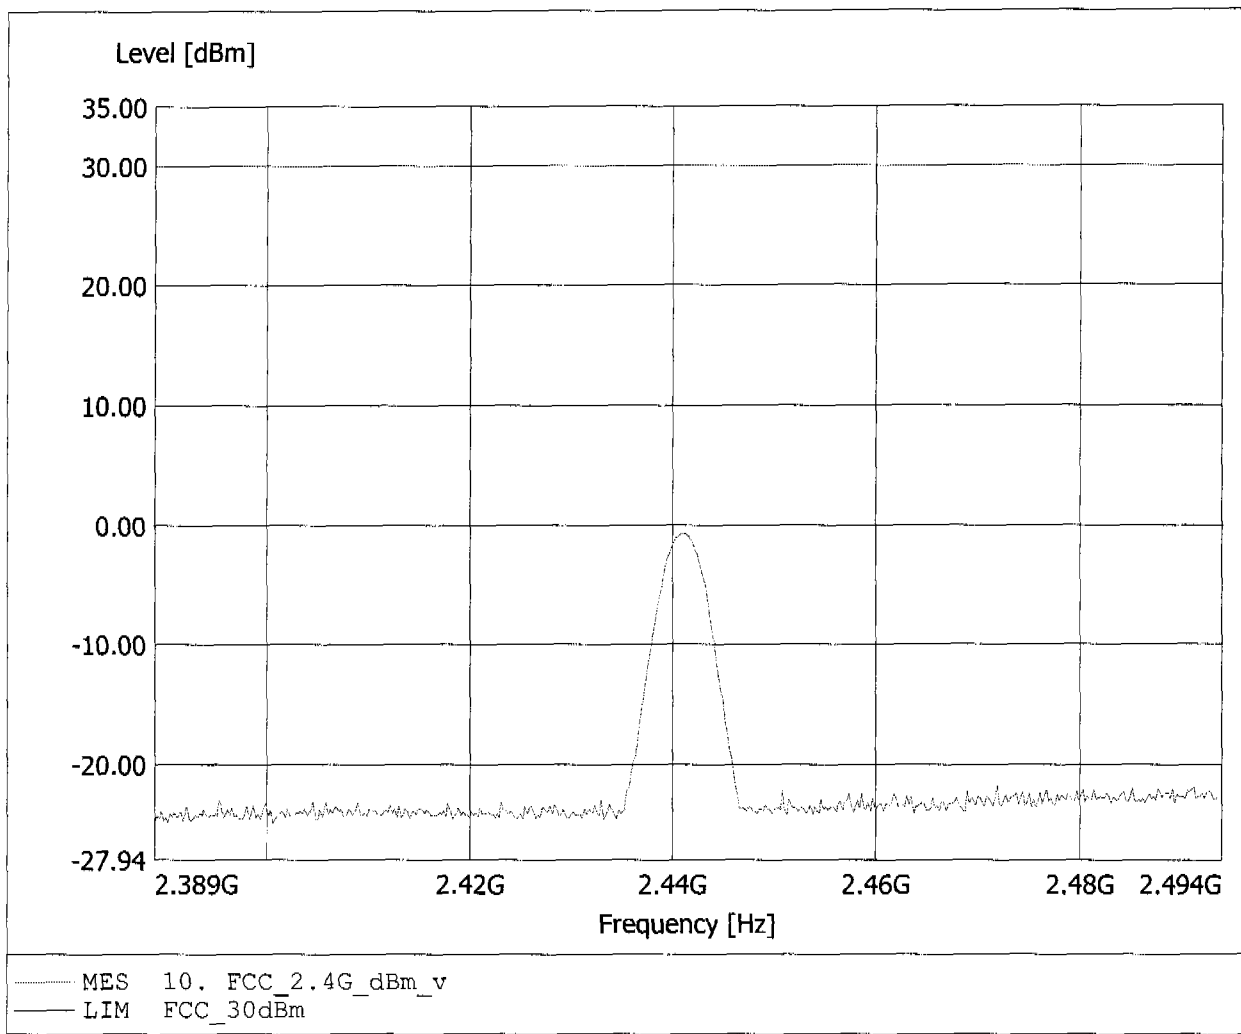


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Bluetooth Headset Classic / 2480 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V +15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: -2.40dBm, RBW: 5MHz

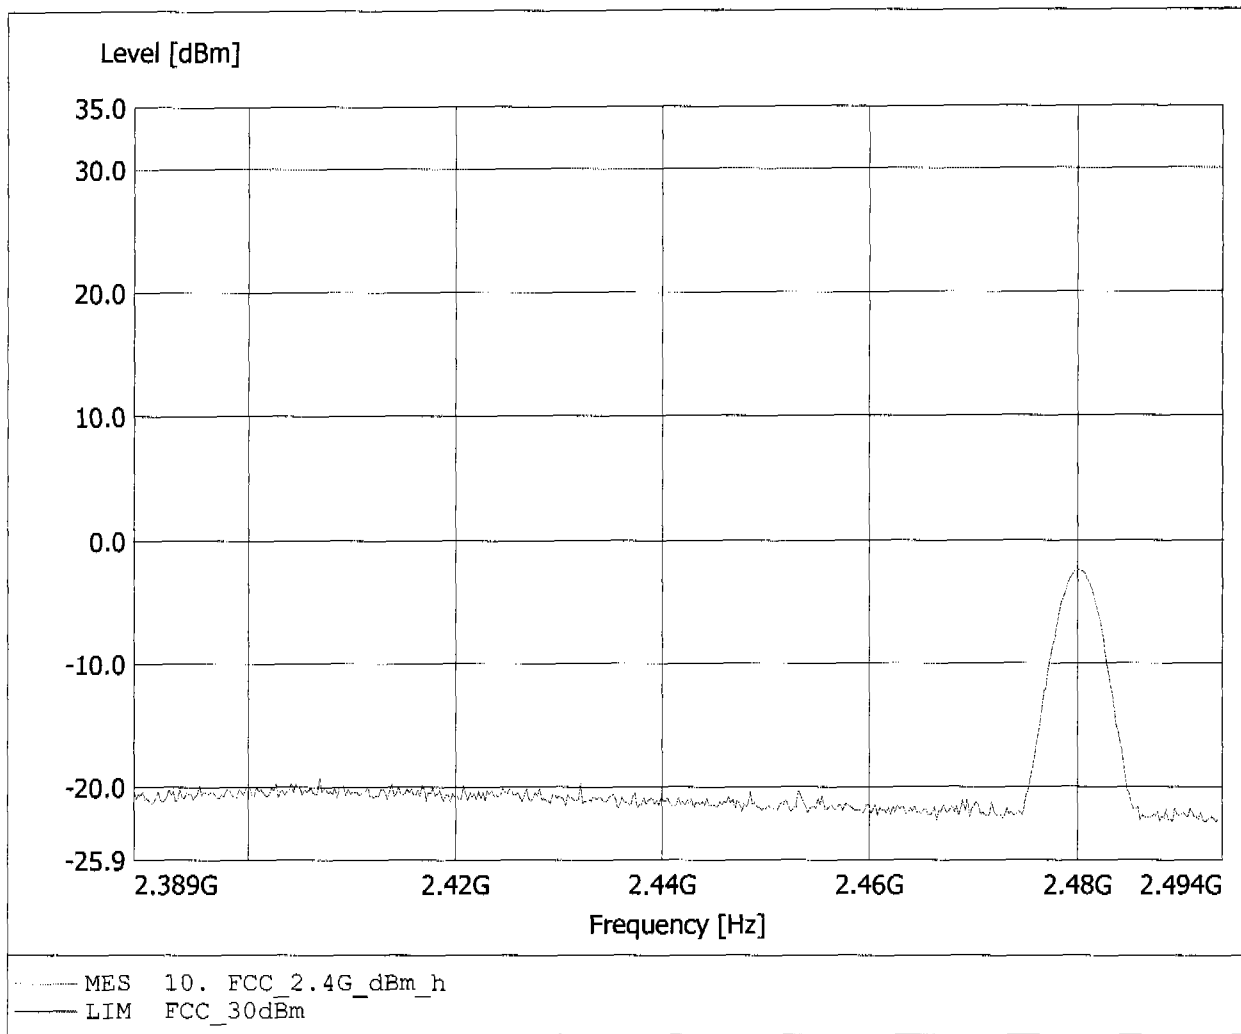

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Bluetooth Headset Classic / 2480 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V +15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: -0.75dBm, RBW: 5MHz

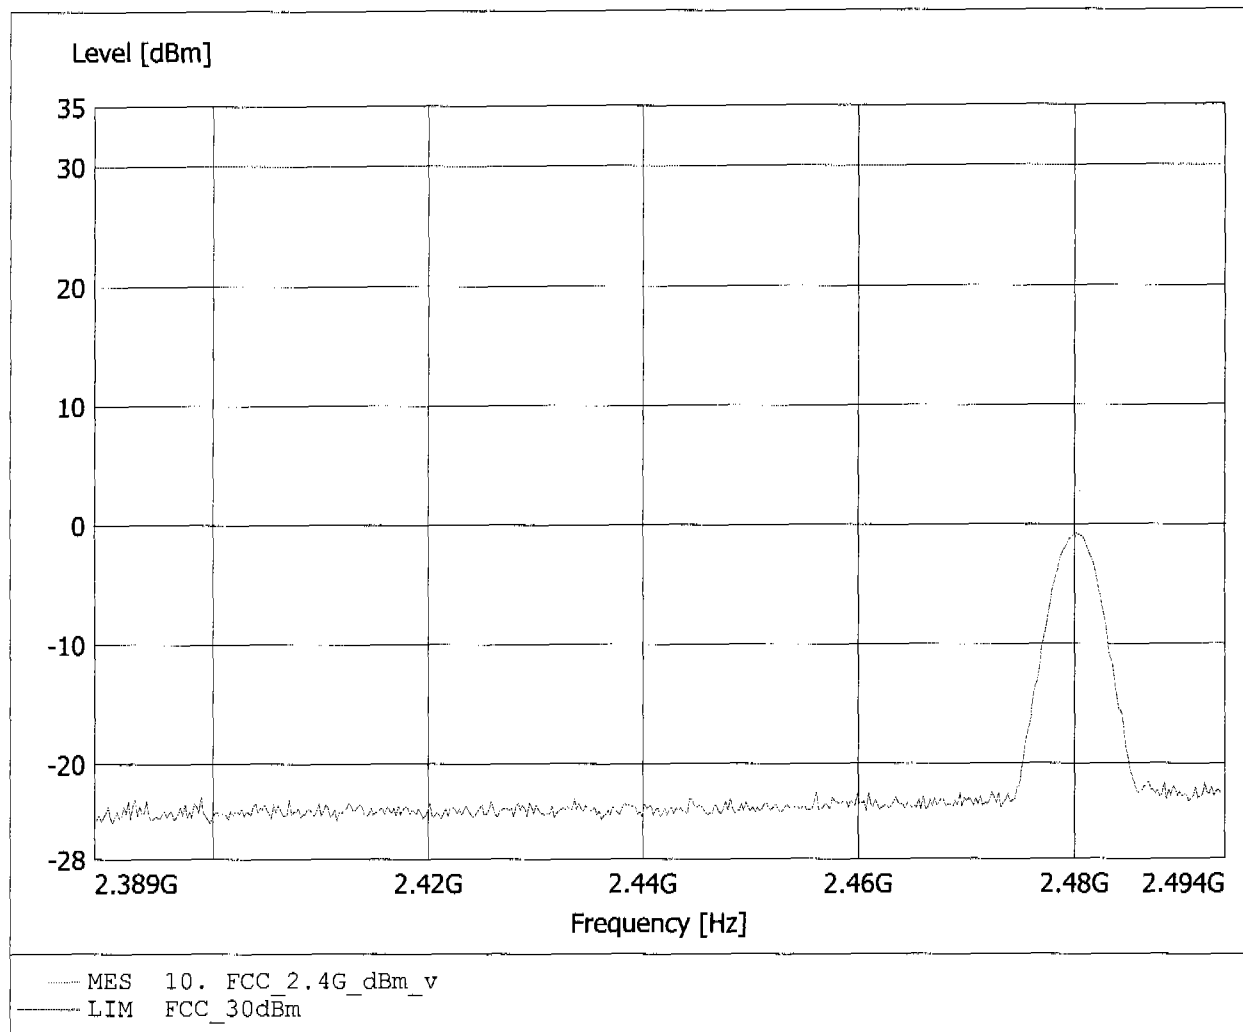




Appendix C

Spurious Emissions radiated - Transmitter operating


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

EUT: Bluetooth Headset Classic / 2402 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Emax: 93.28dBµV/m, RBW: 100kHz

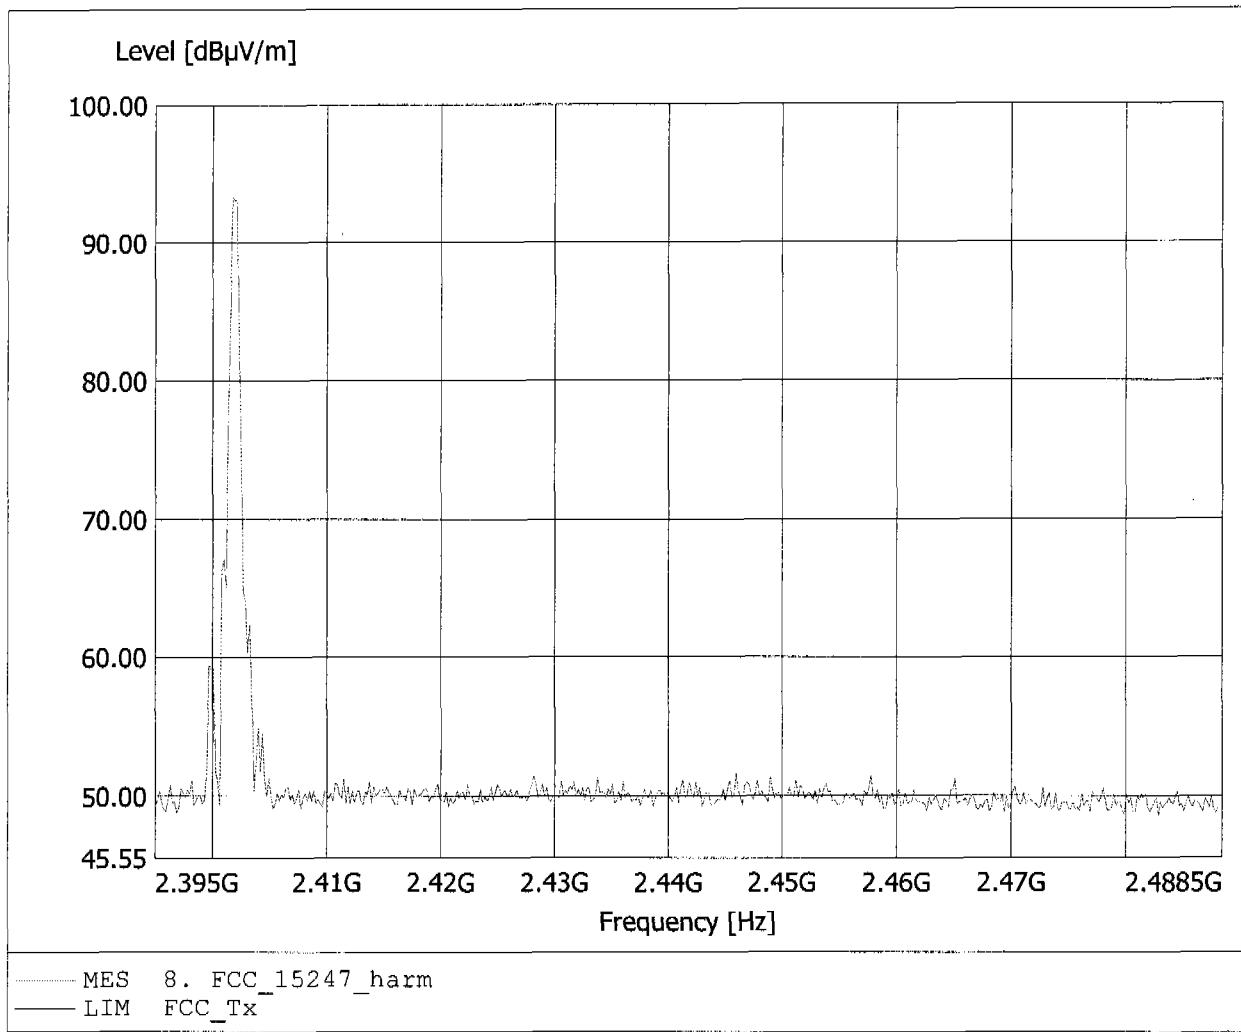


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2402 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 192.164MHz, Emax: 30.82dBµV/m, RBW: 100kHz

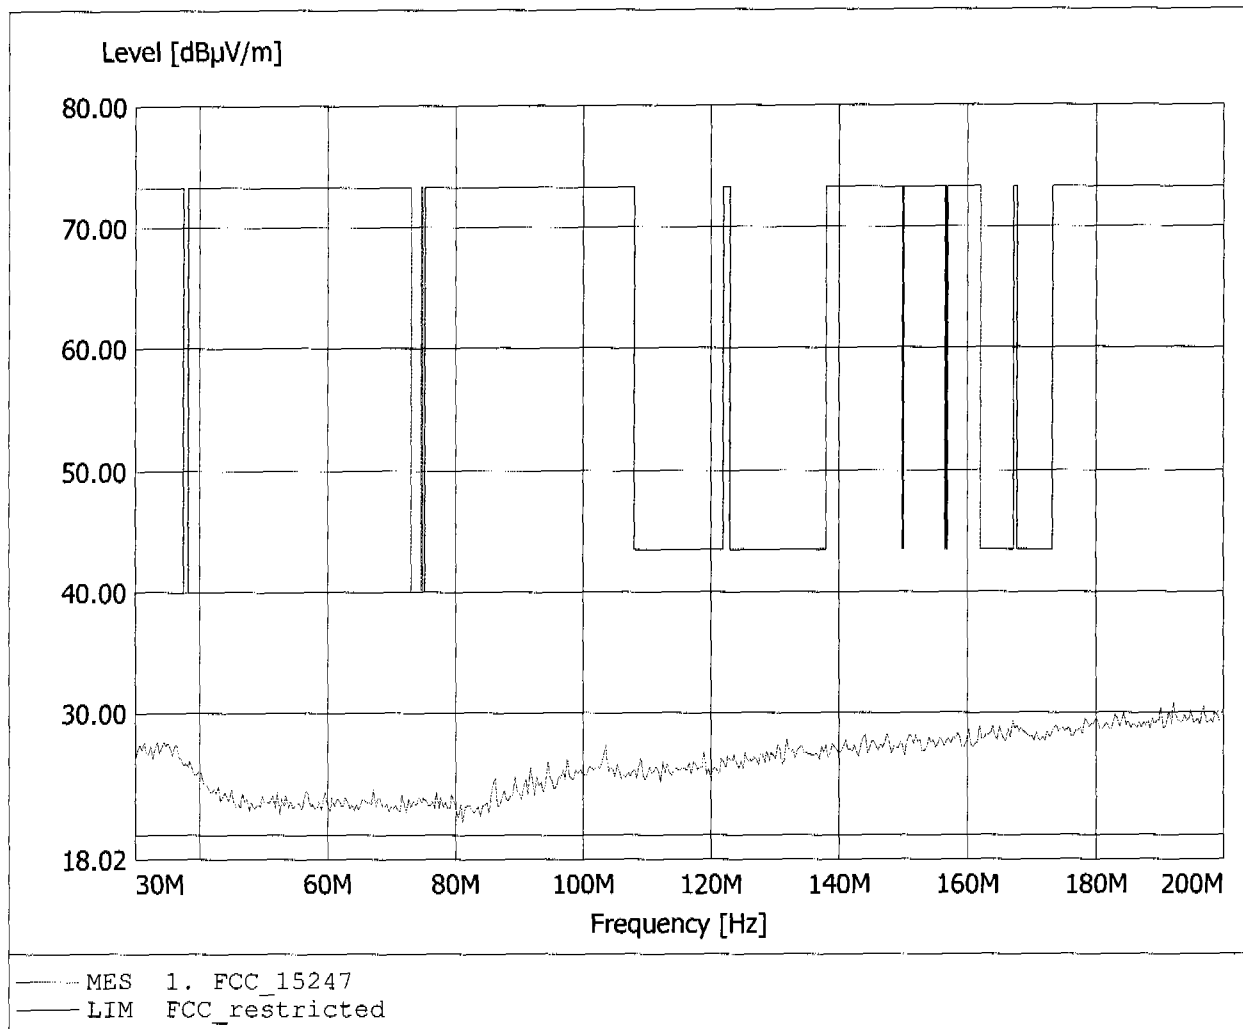


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2402 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 35.451MHz, Emax: 36.58dBµV/m, RBW: 100kHz

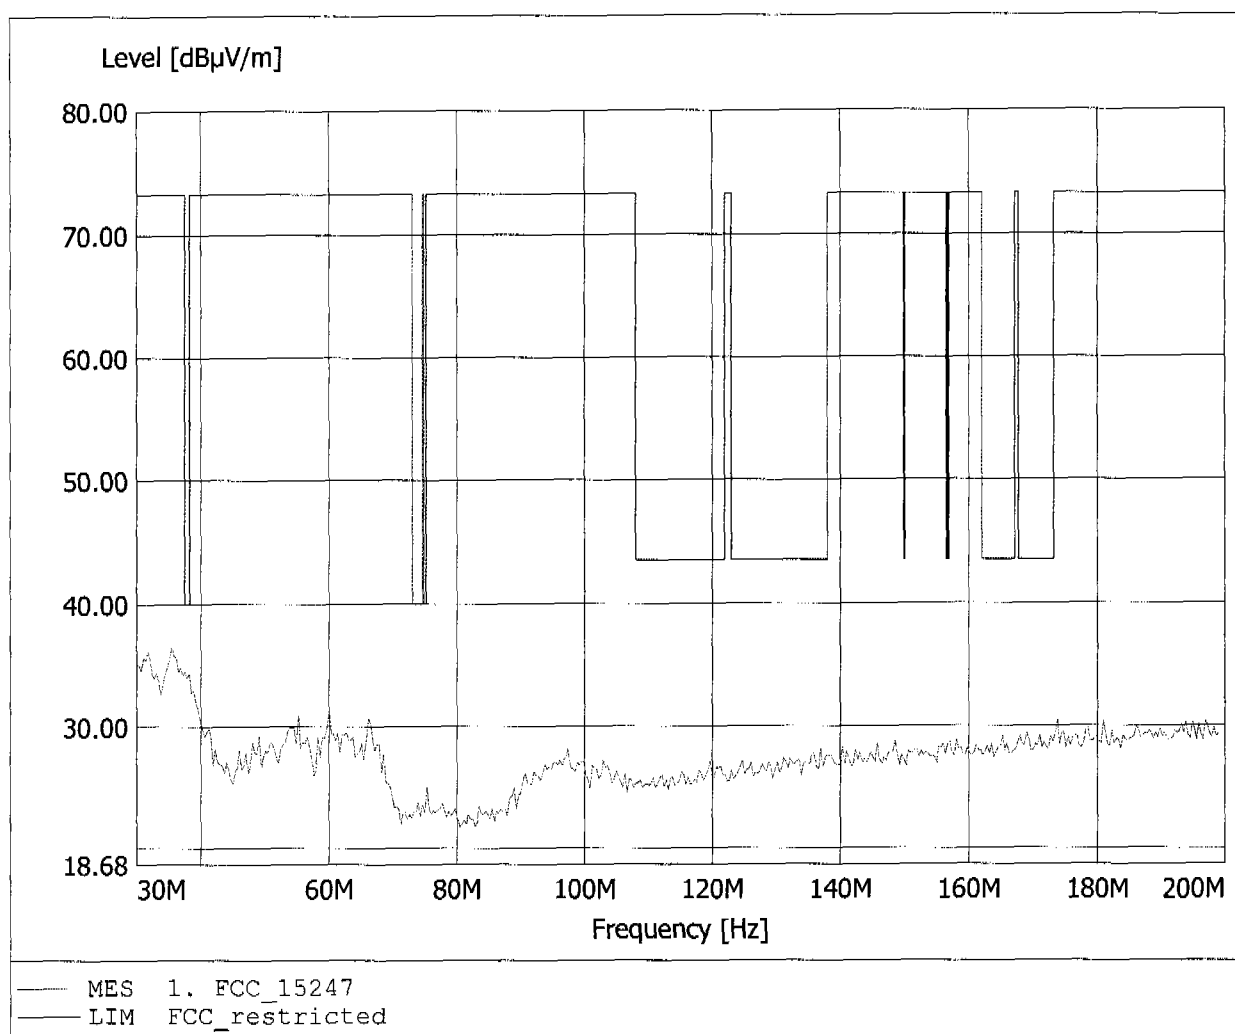


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2402 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 333.066MHz, Emax: 27.53dBµV/m, RBW: 100kHz

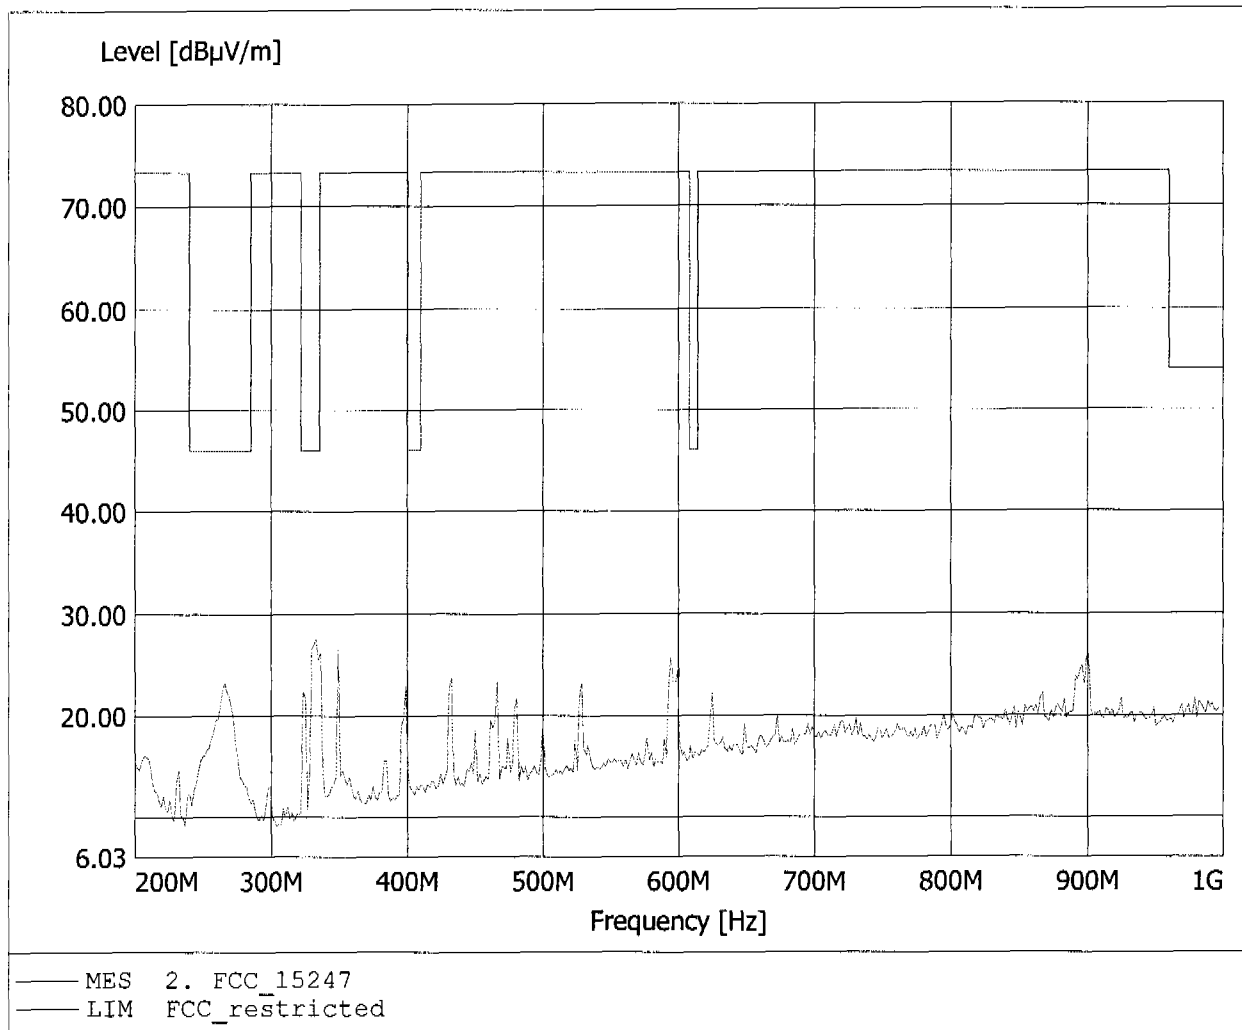


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2402 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 594.389MHz, Emax: 29.33dBµV/m, RBW: 100kHz

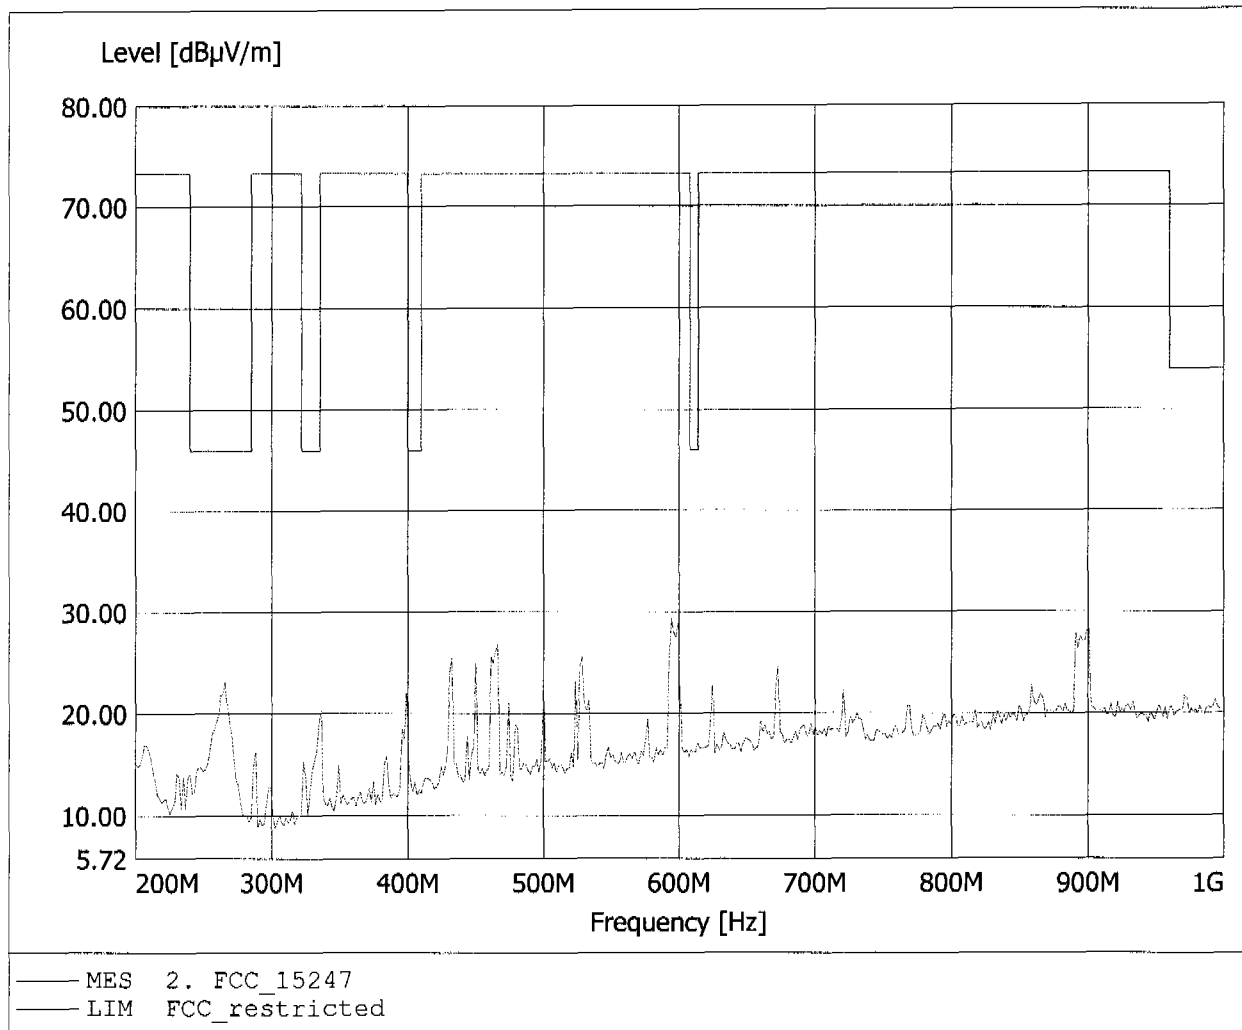


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2402 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 60.97dBµV/m, RBW: 1MHz

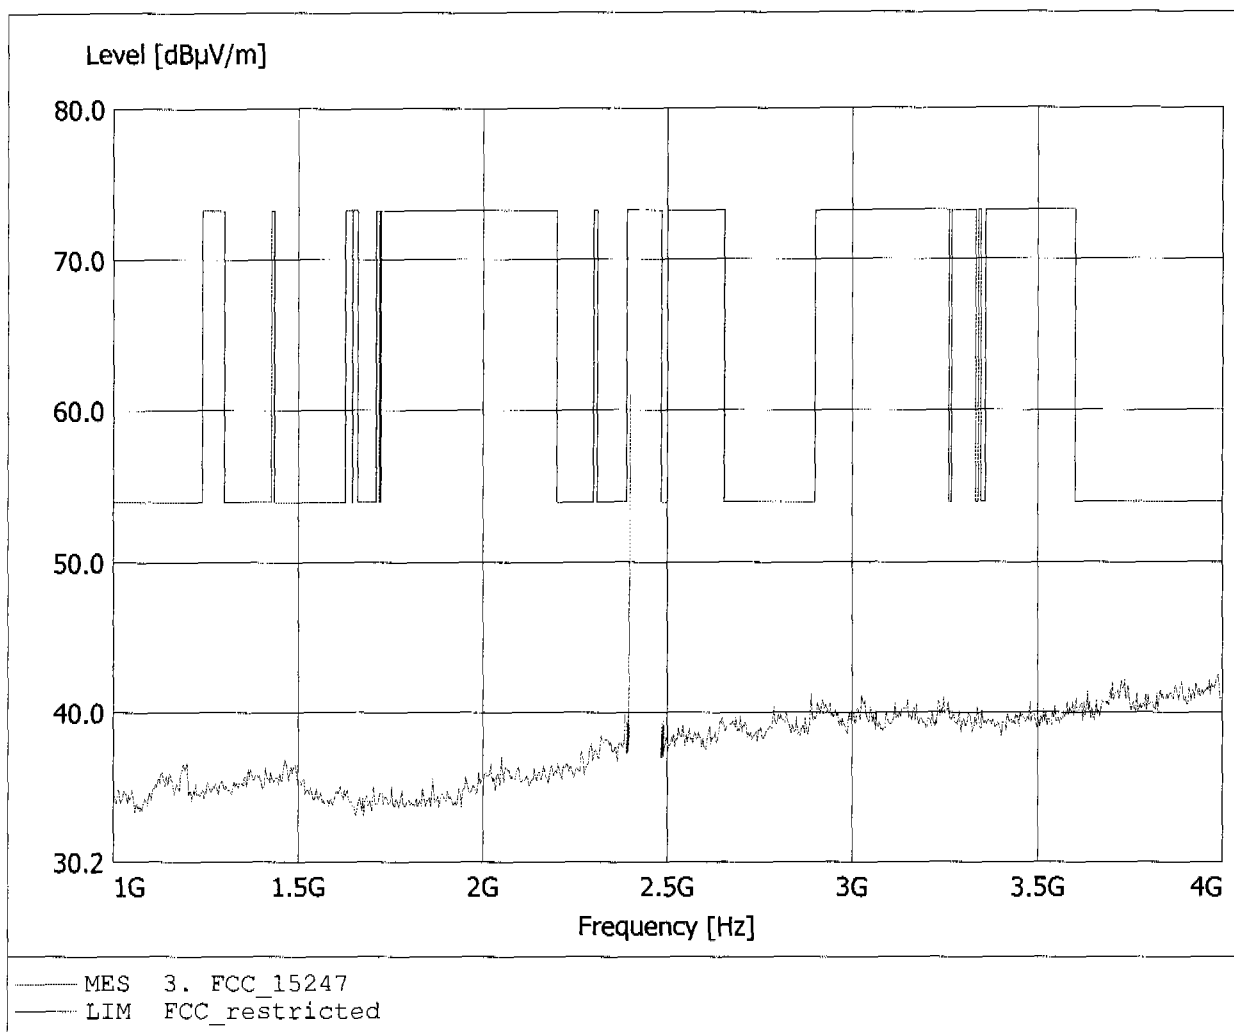


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2402 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 60.97dB μ V/m, RBW: 1MHz

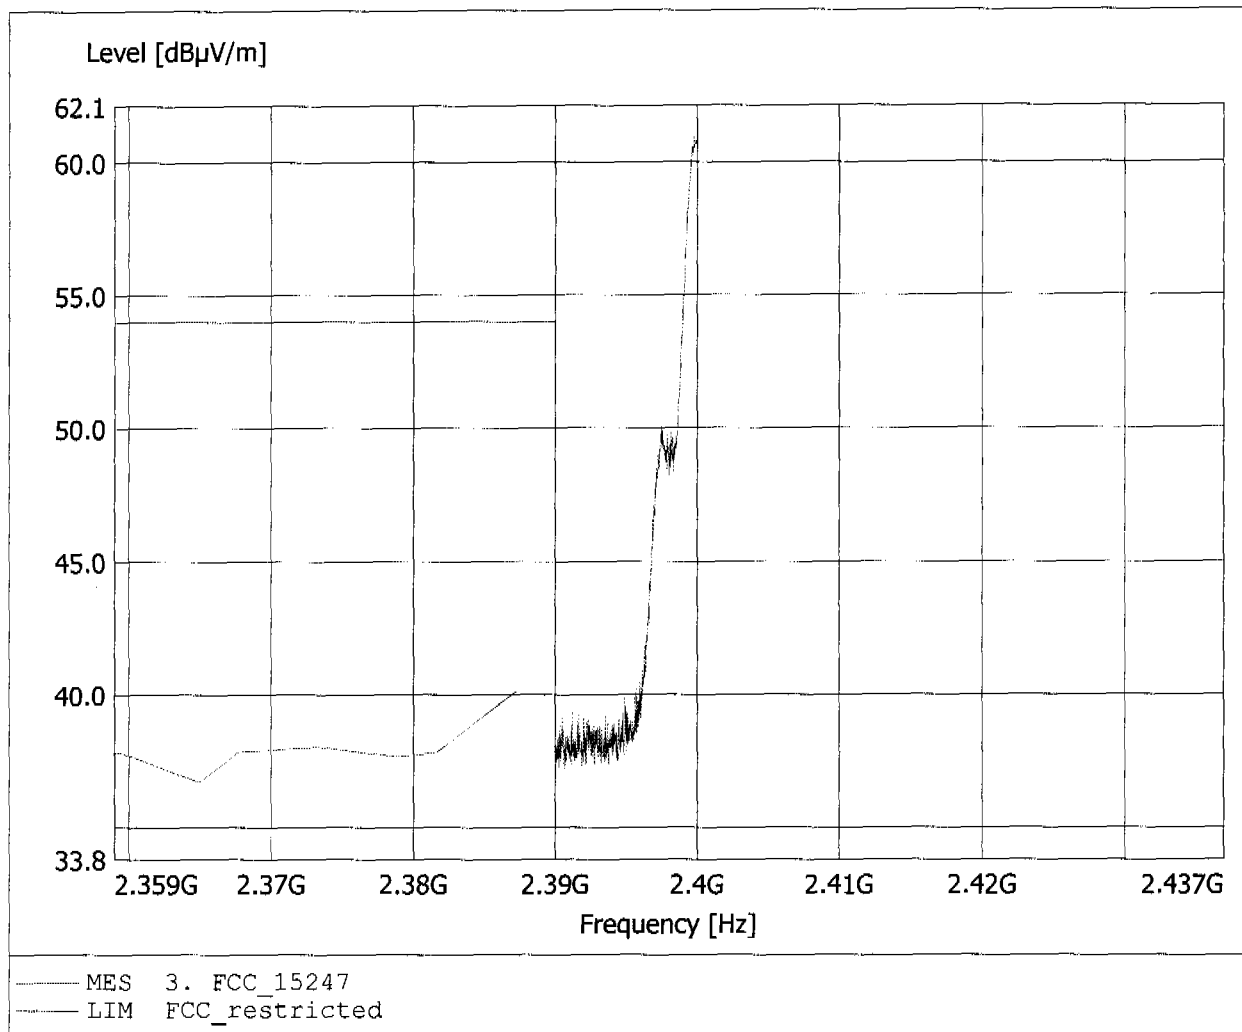


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2402 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 64.45dBµV/m, RBW: 1MHz

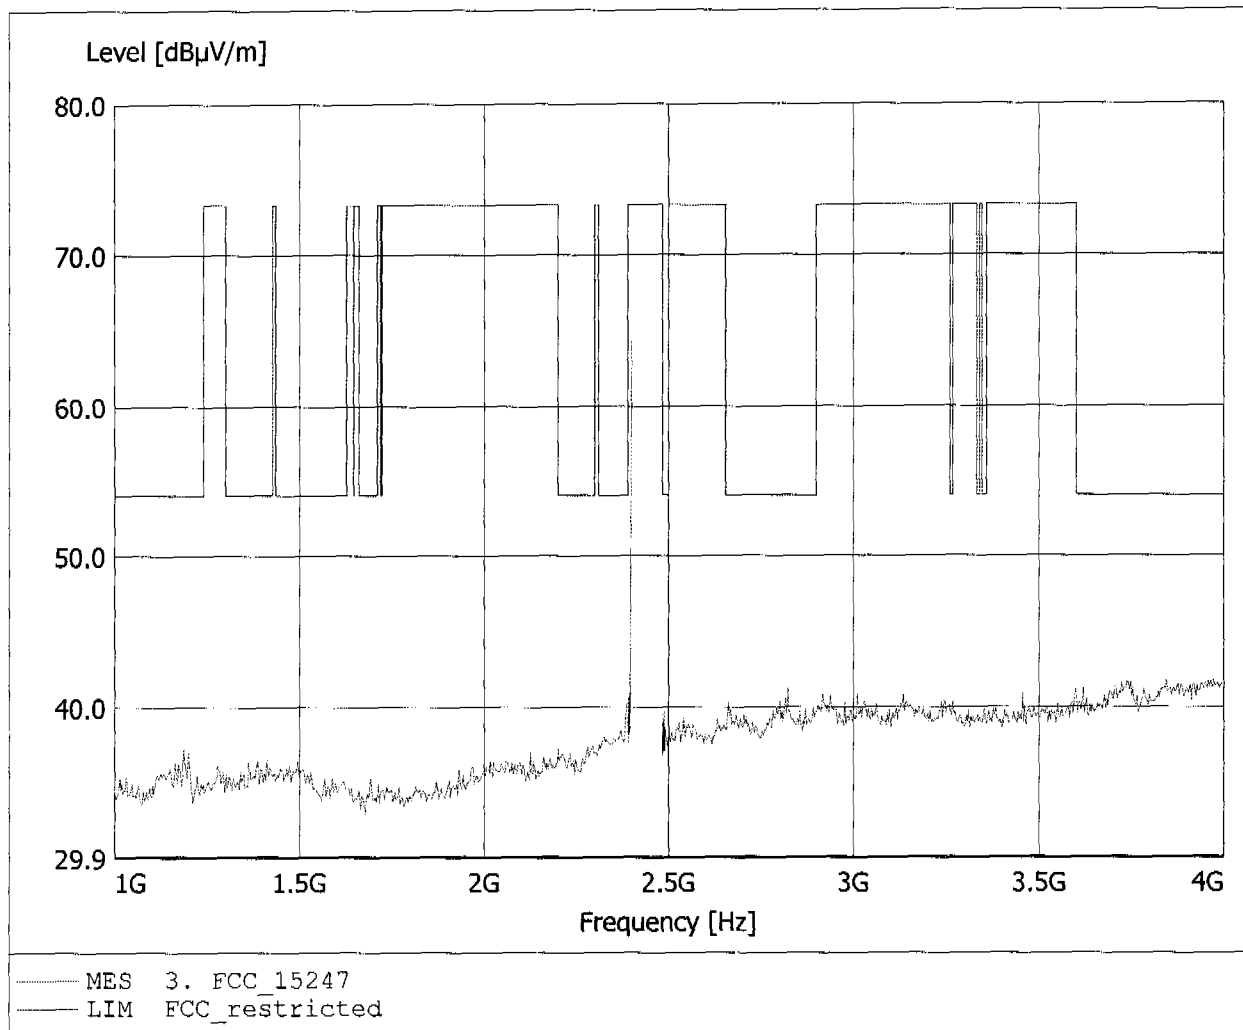


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2402 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 64.45dBµV/m, RBW: 1MHz

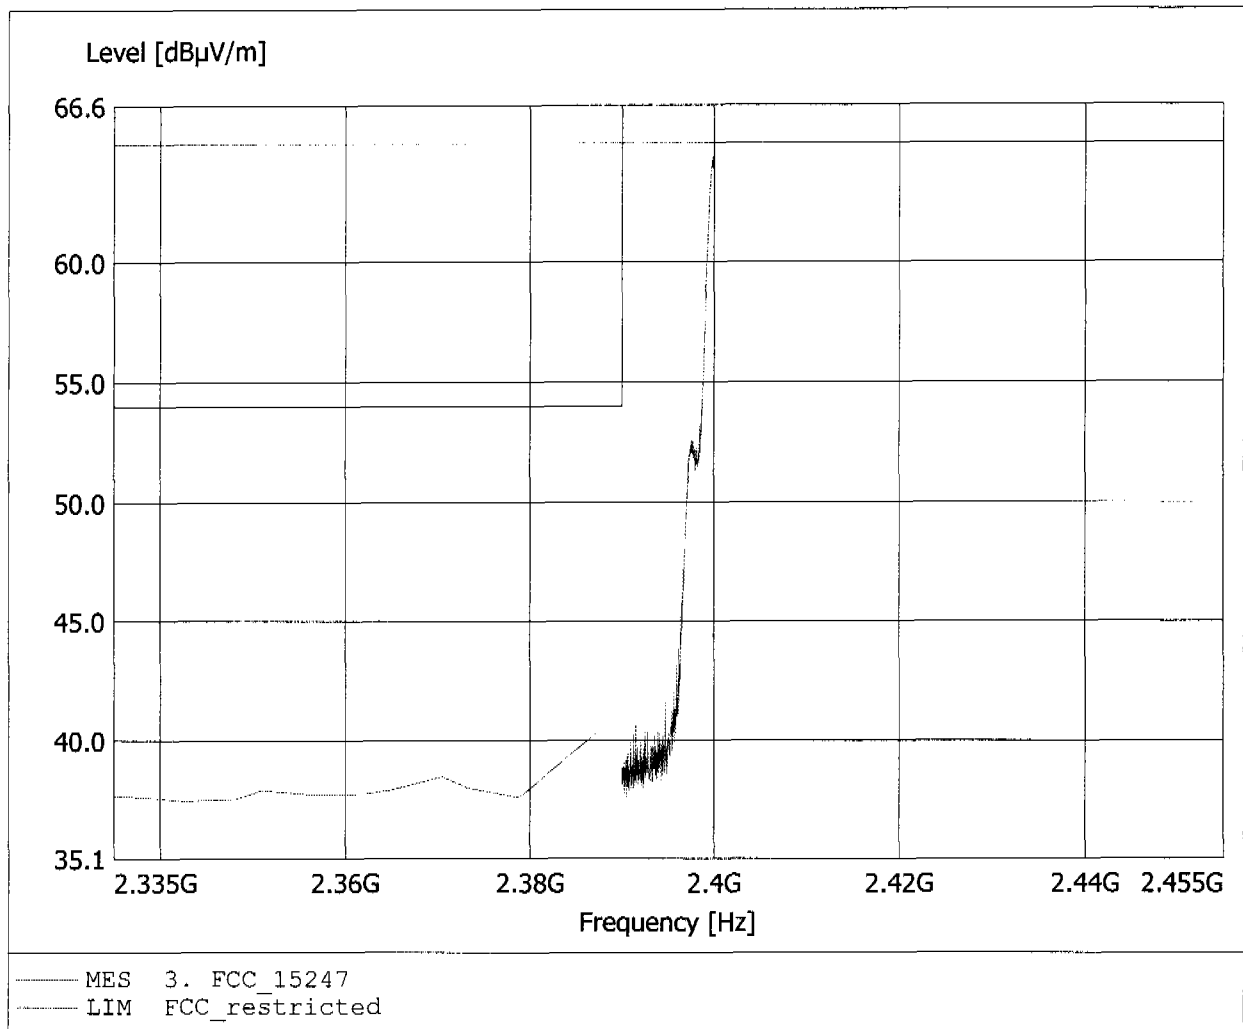


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2402 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 6.958GHz, Emax: 35.85dBµV/m, RBW: 1MHz

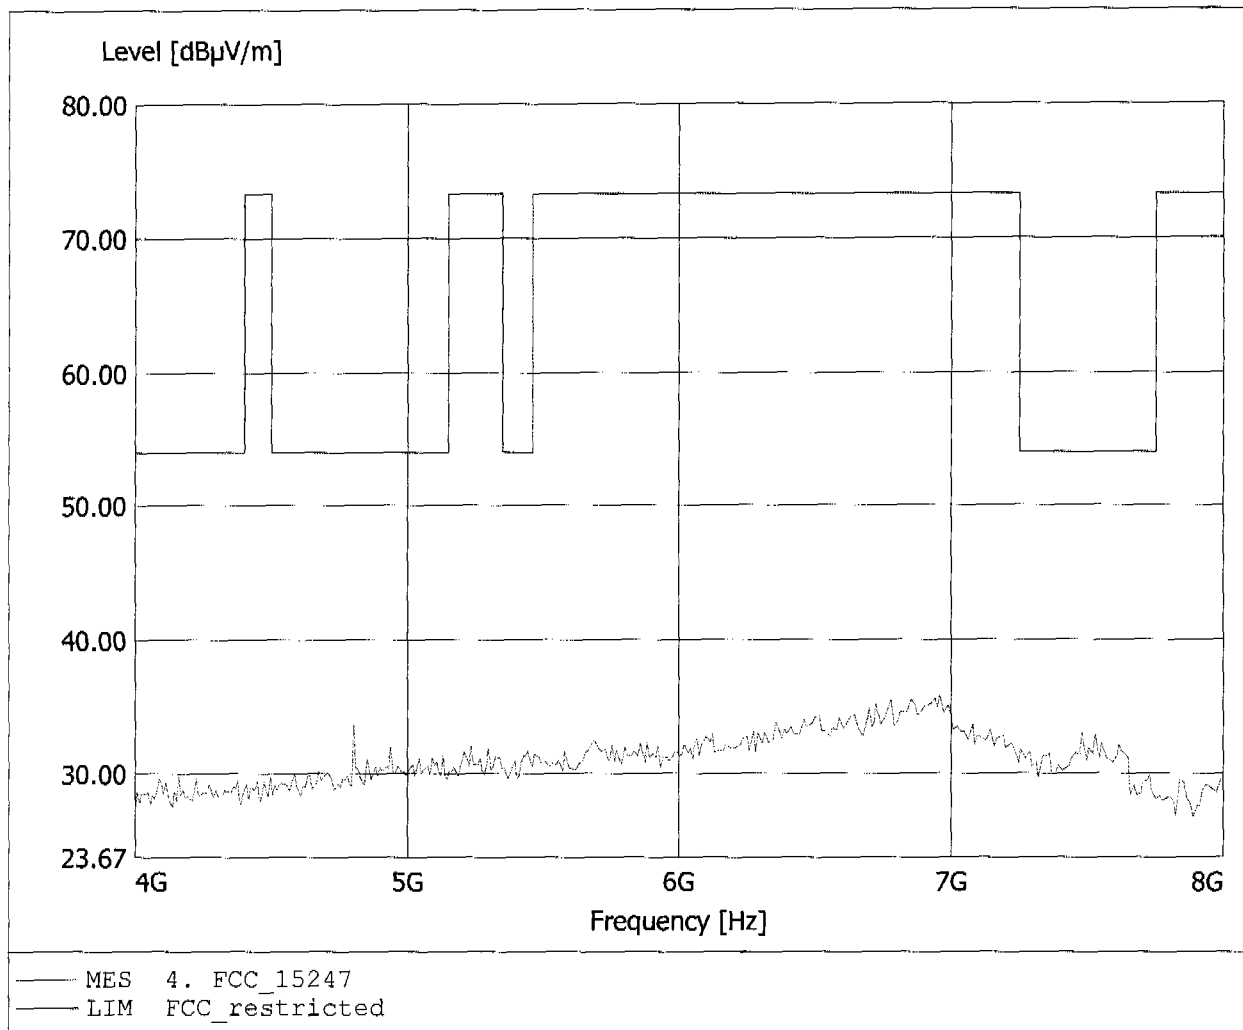


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2402 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 40.27dBµV/m, RBW: 1MHz

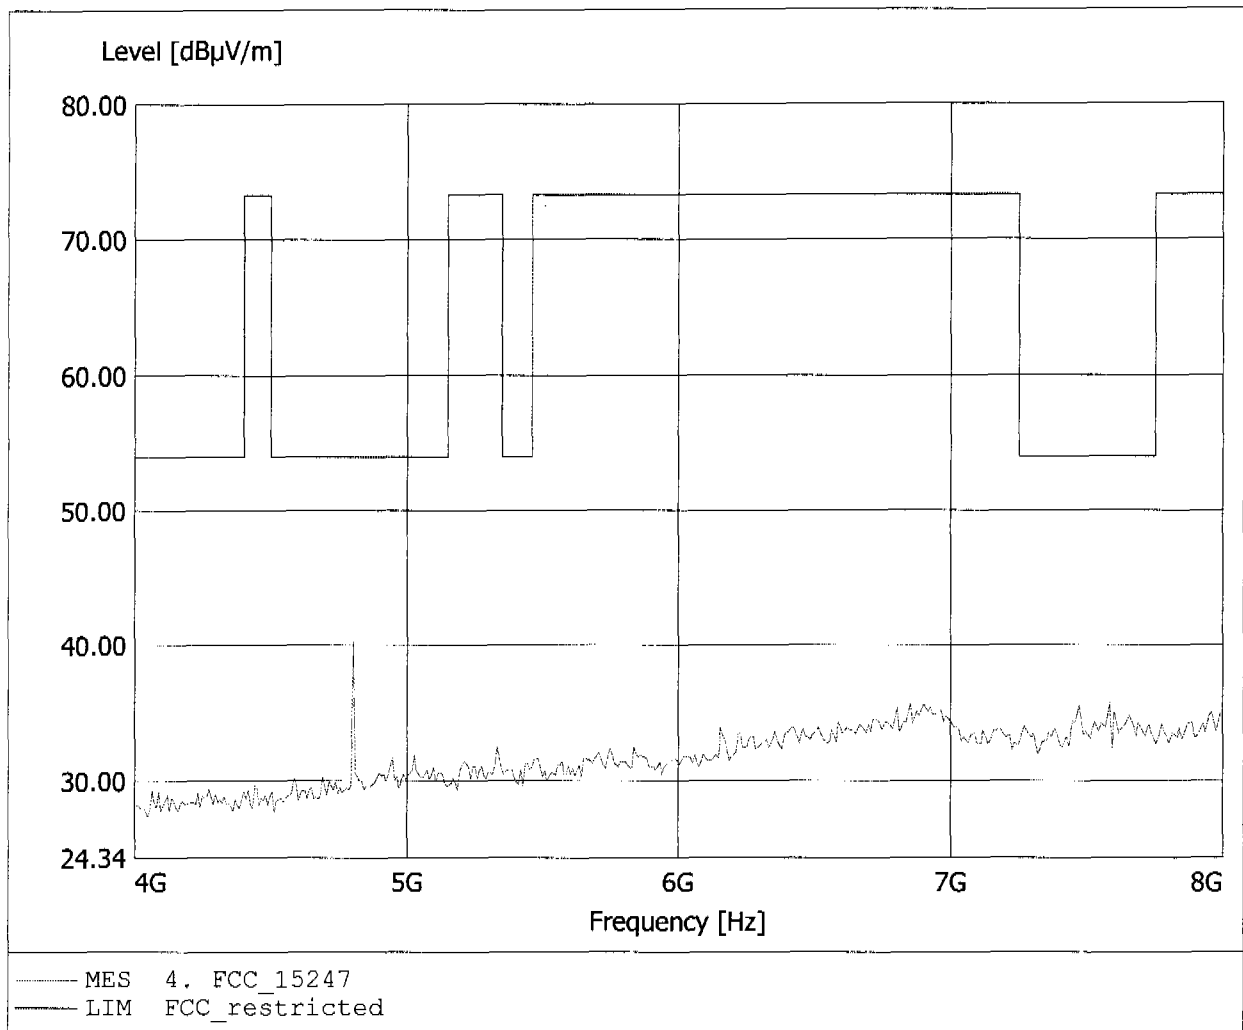


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2402 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.022GHz, Emax: 41.78dBµV/m, RBW: 1MHz

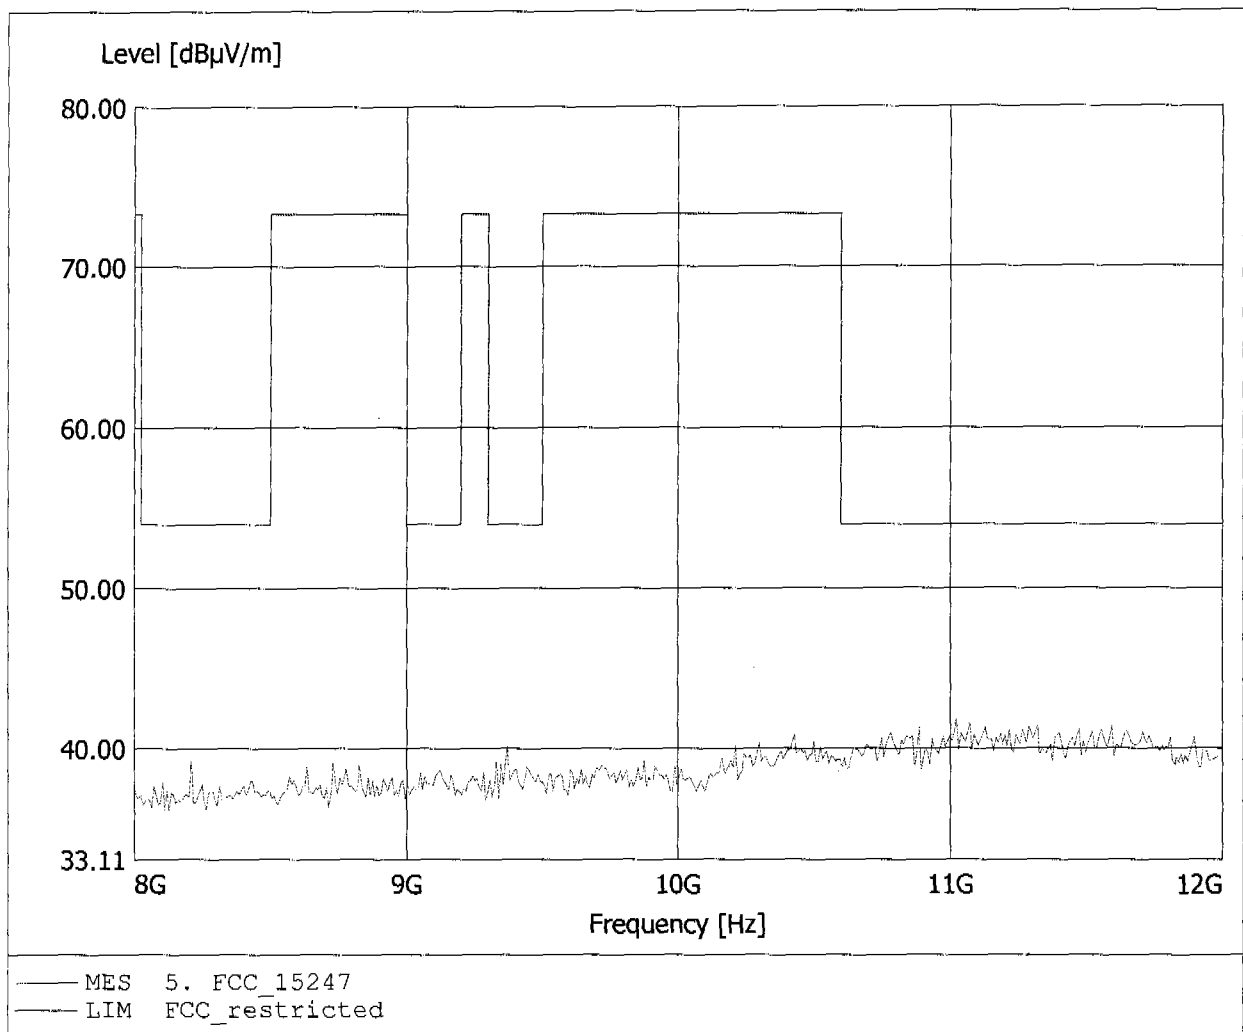


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2402 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 10.862GHz, Emax: 42.53dBµV/m, RBW: 1MHz

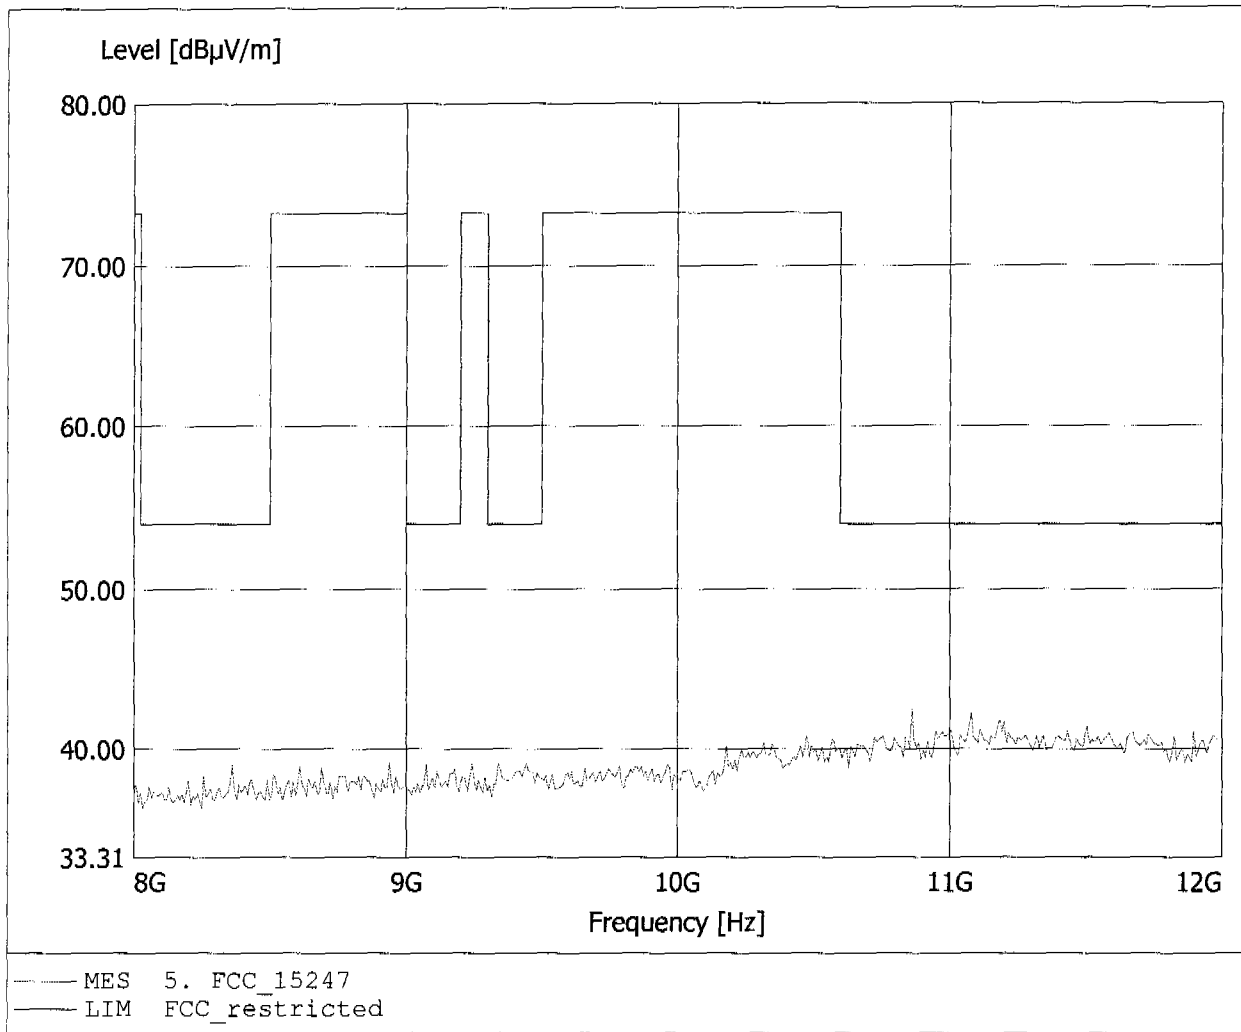


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2402 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.385GHz, Emax: 43.99dBµV/m, RBW: 1MHz

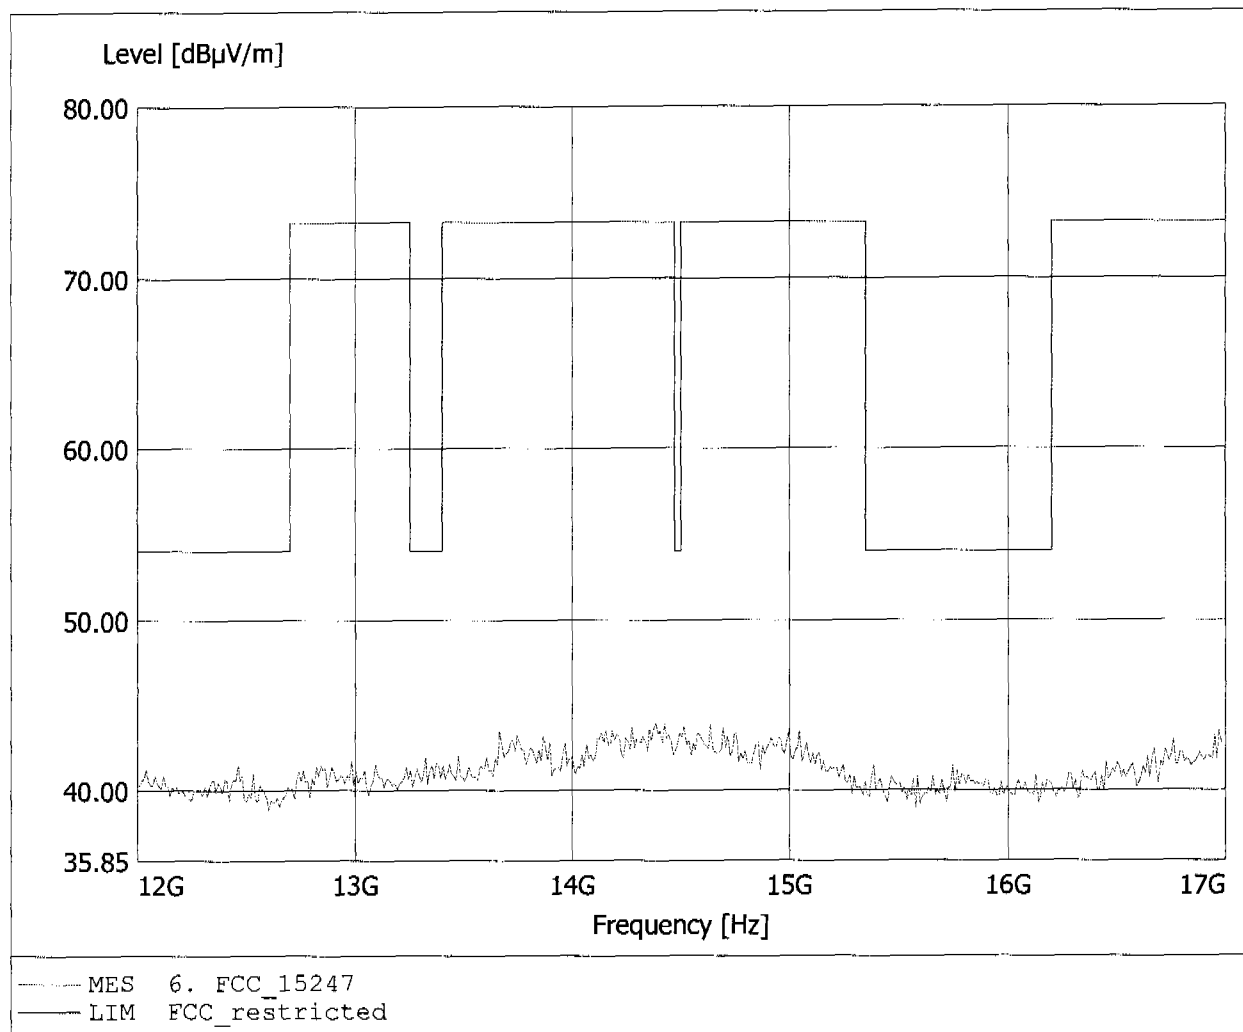


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2402 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.585GHz, Emax: 44.99dBµV/m, RBW: 1MHz

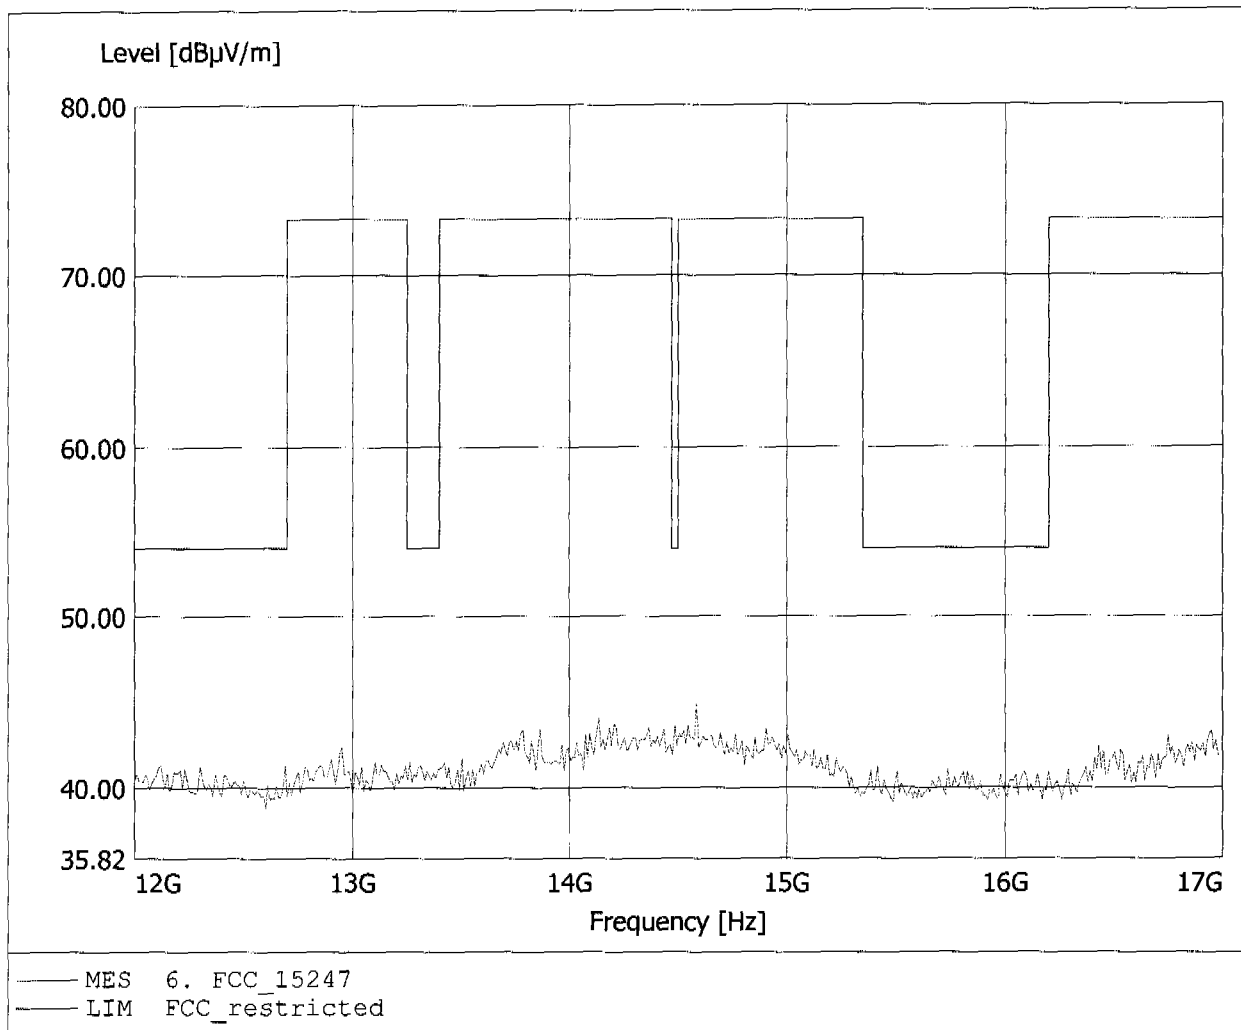


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2402 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.038GHz, Emax: 44.47dBµV/m, RBW: 1MHz

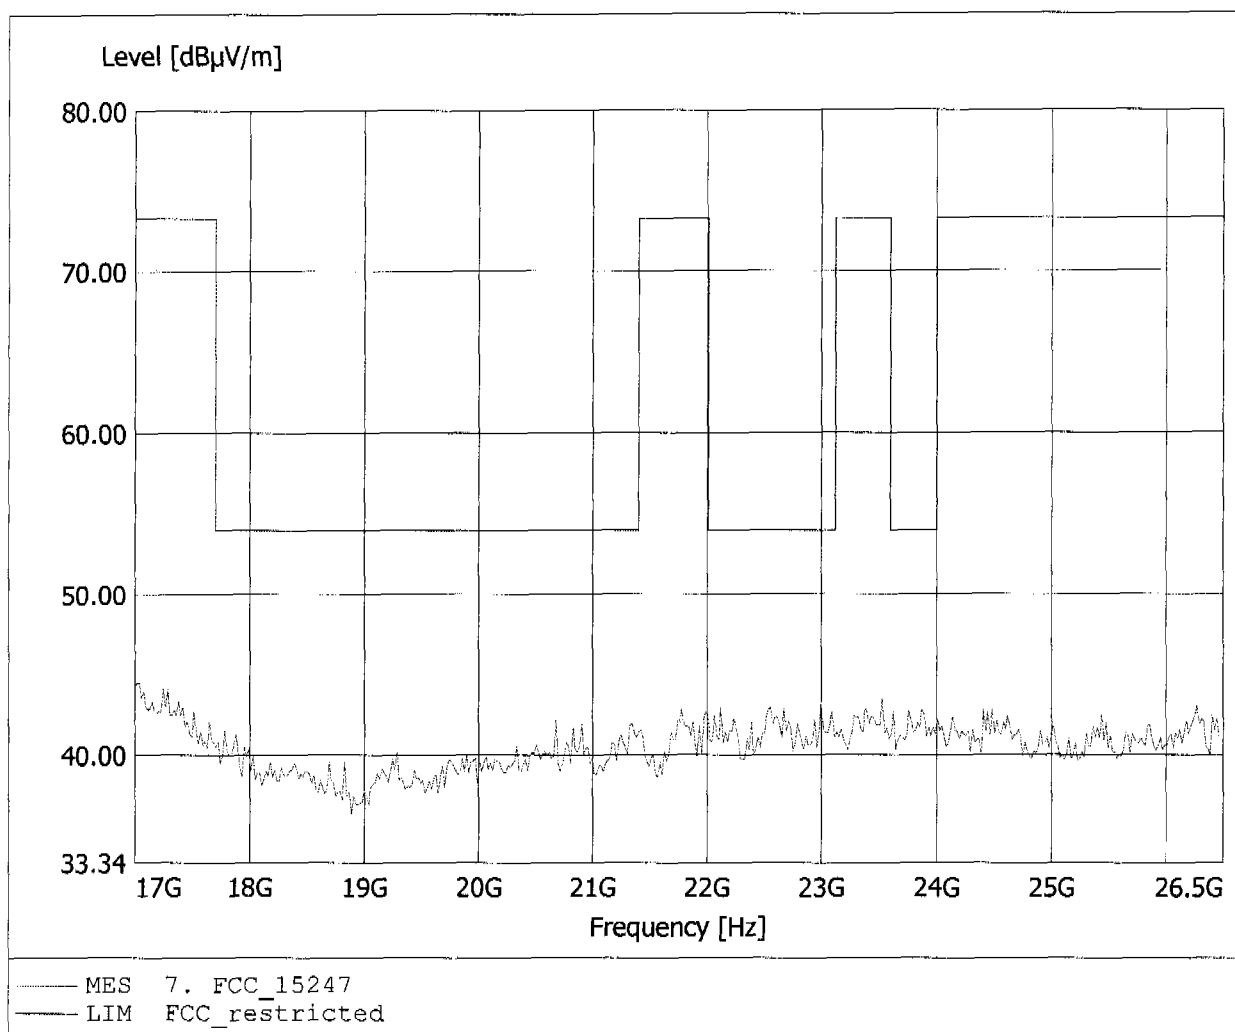


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2402 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.019GHz, Emax: 45.09dBµV/m, RBW: 1MHz

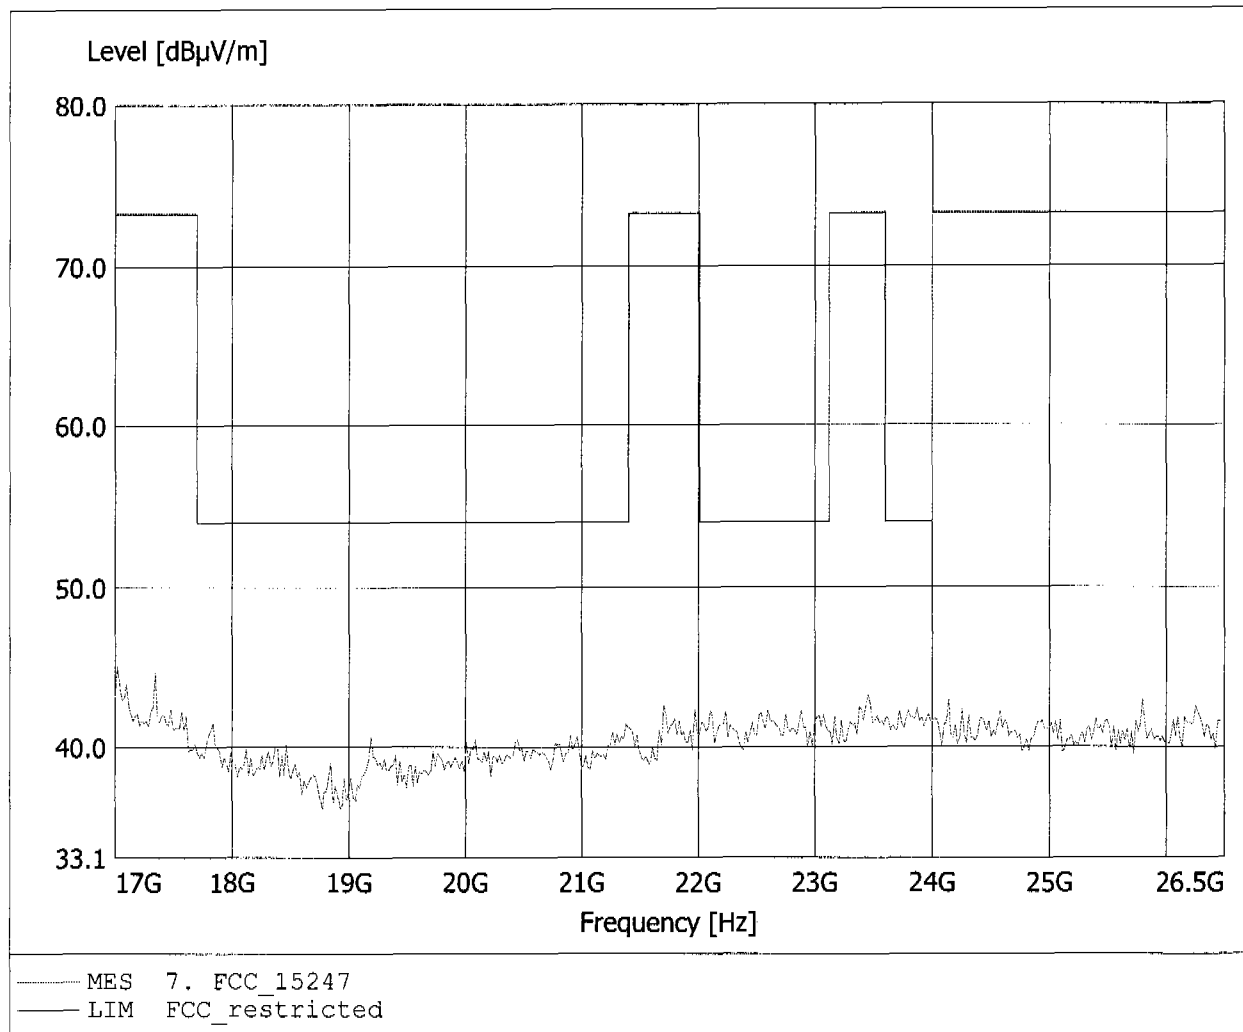


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2441 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 199.319MHz, Emax: 30.60dBµV/m, RBW: 100kHz

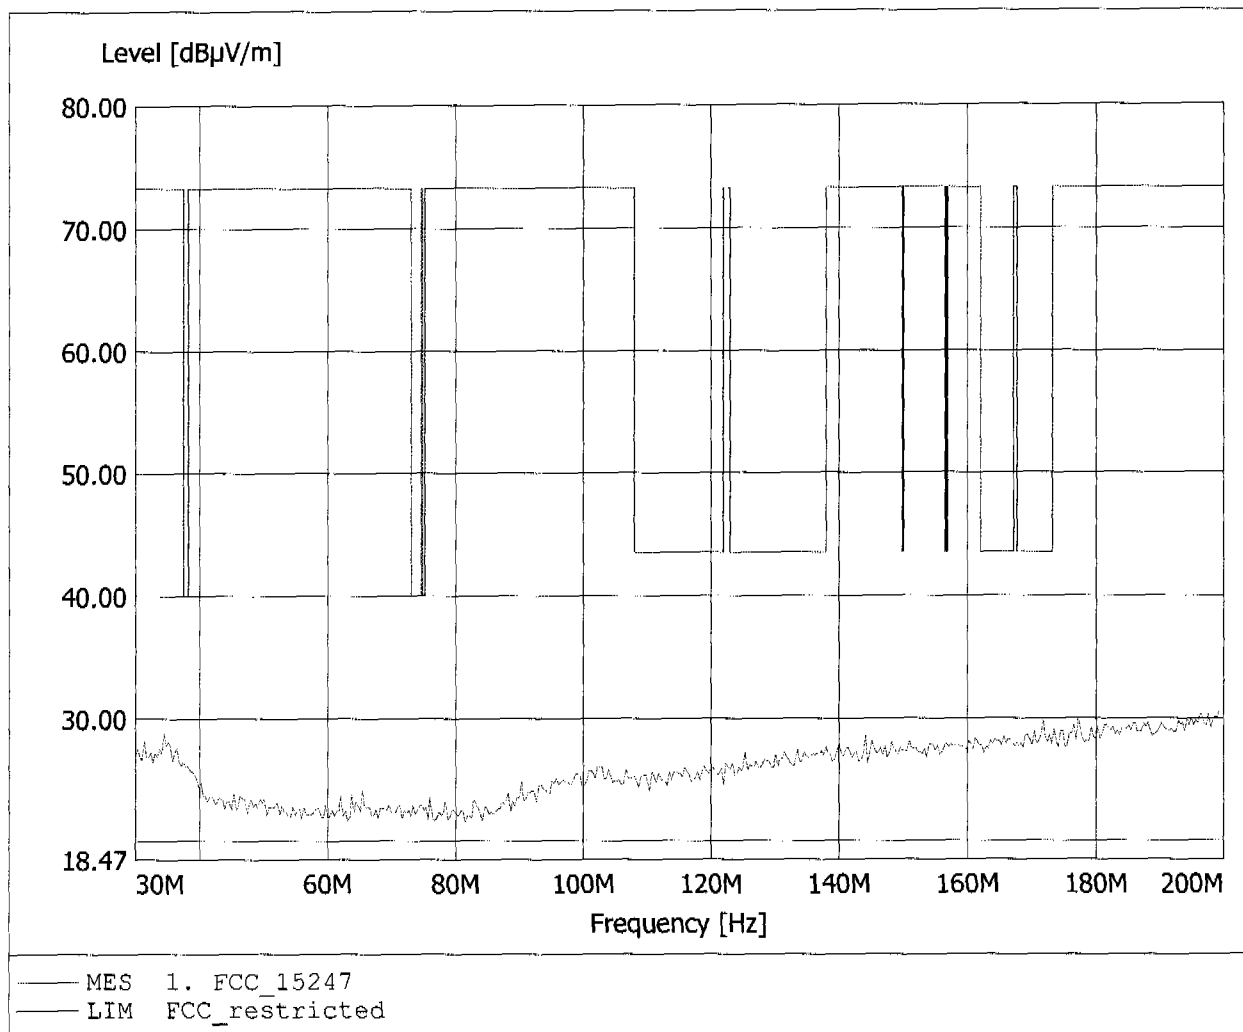


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2441 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 31.703MHz, Emax: 36.37dBµV/m, RBW: 100kHz

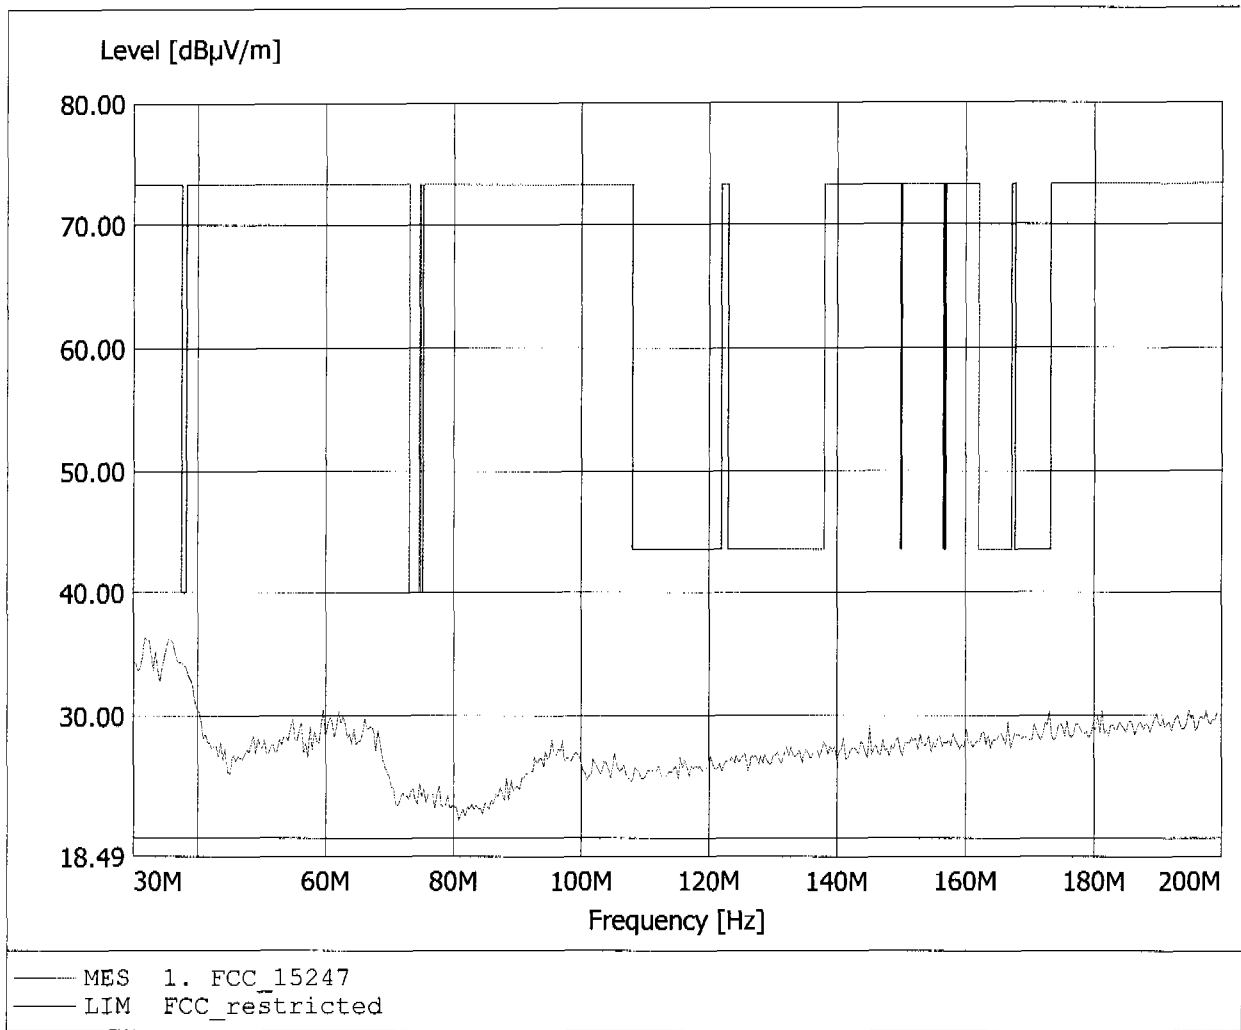


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2441 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 336.273MHz, Emax: 28.15dBµV/m, RBW: 100kHz

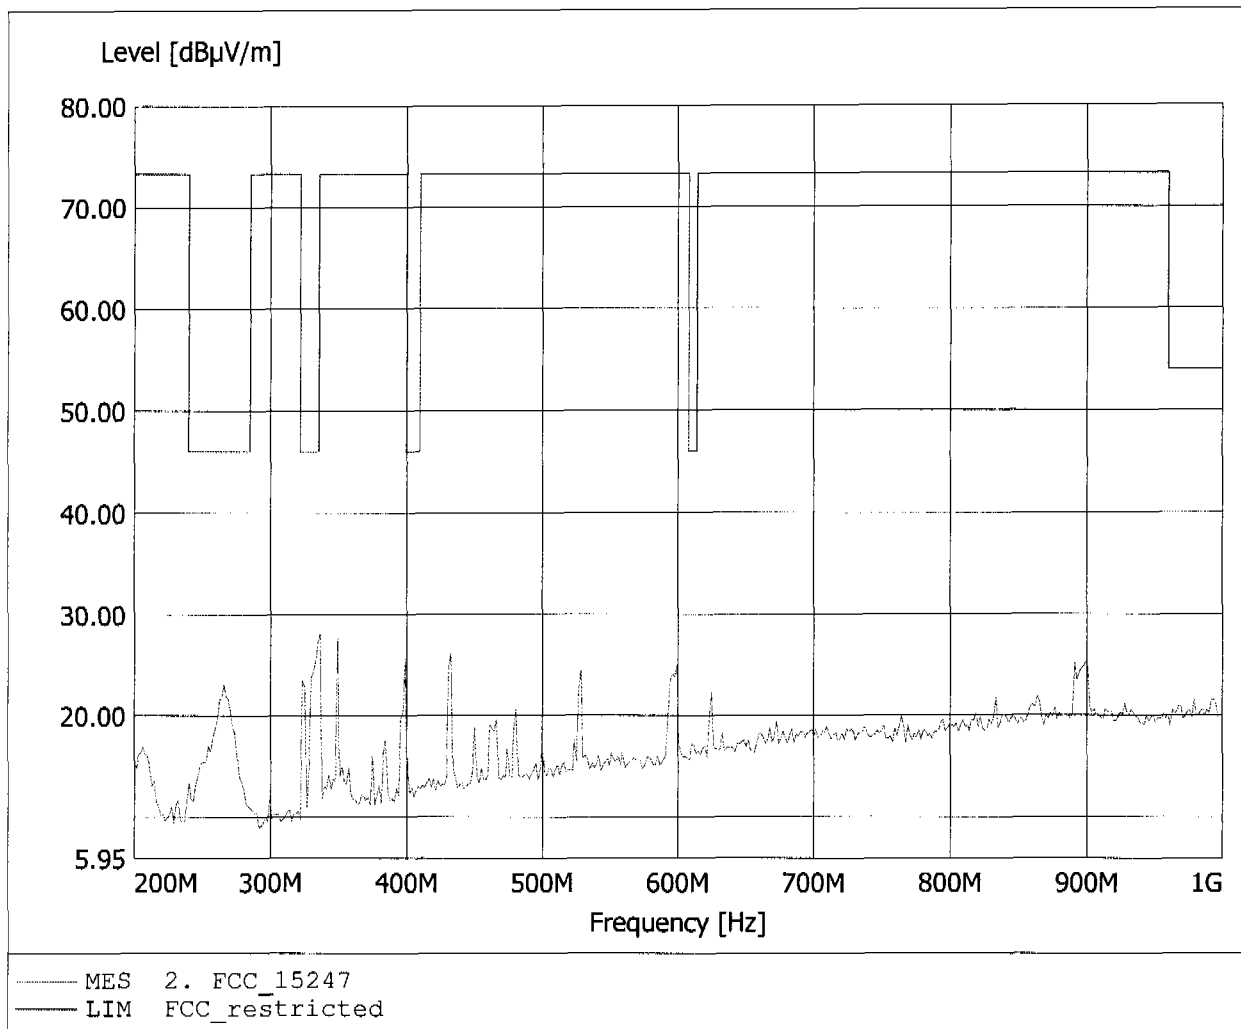


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2441 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 594.389MHz, Emax: 30.59dBµV/m, RBW: 100kHz

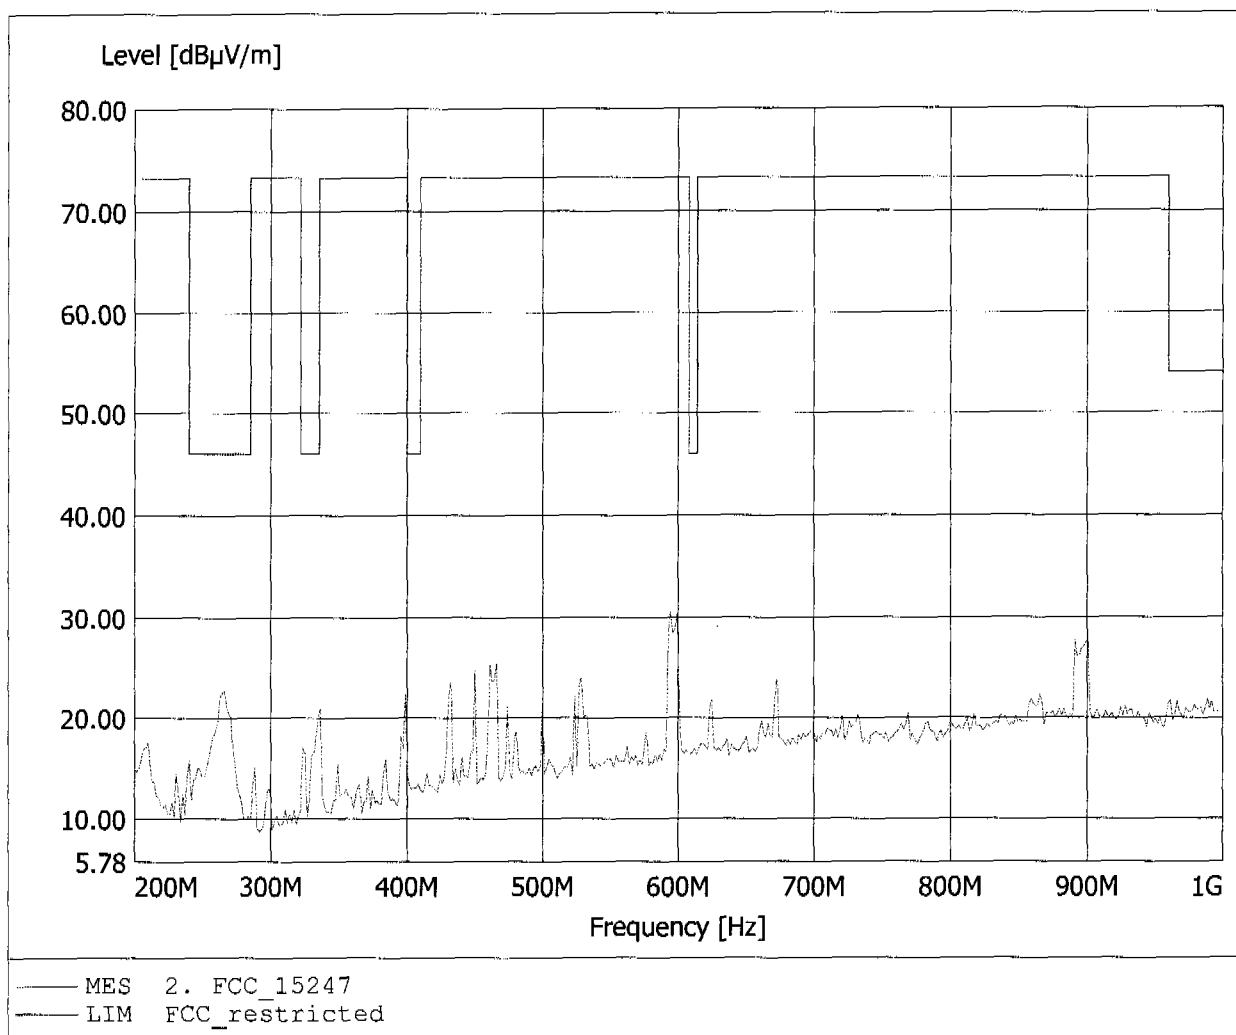


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2441 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.979GHz, Emax: 42.30dBµV/m, RBW: 1MHz

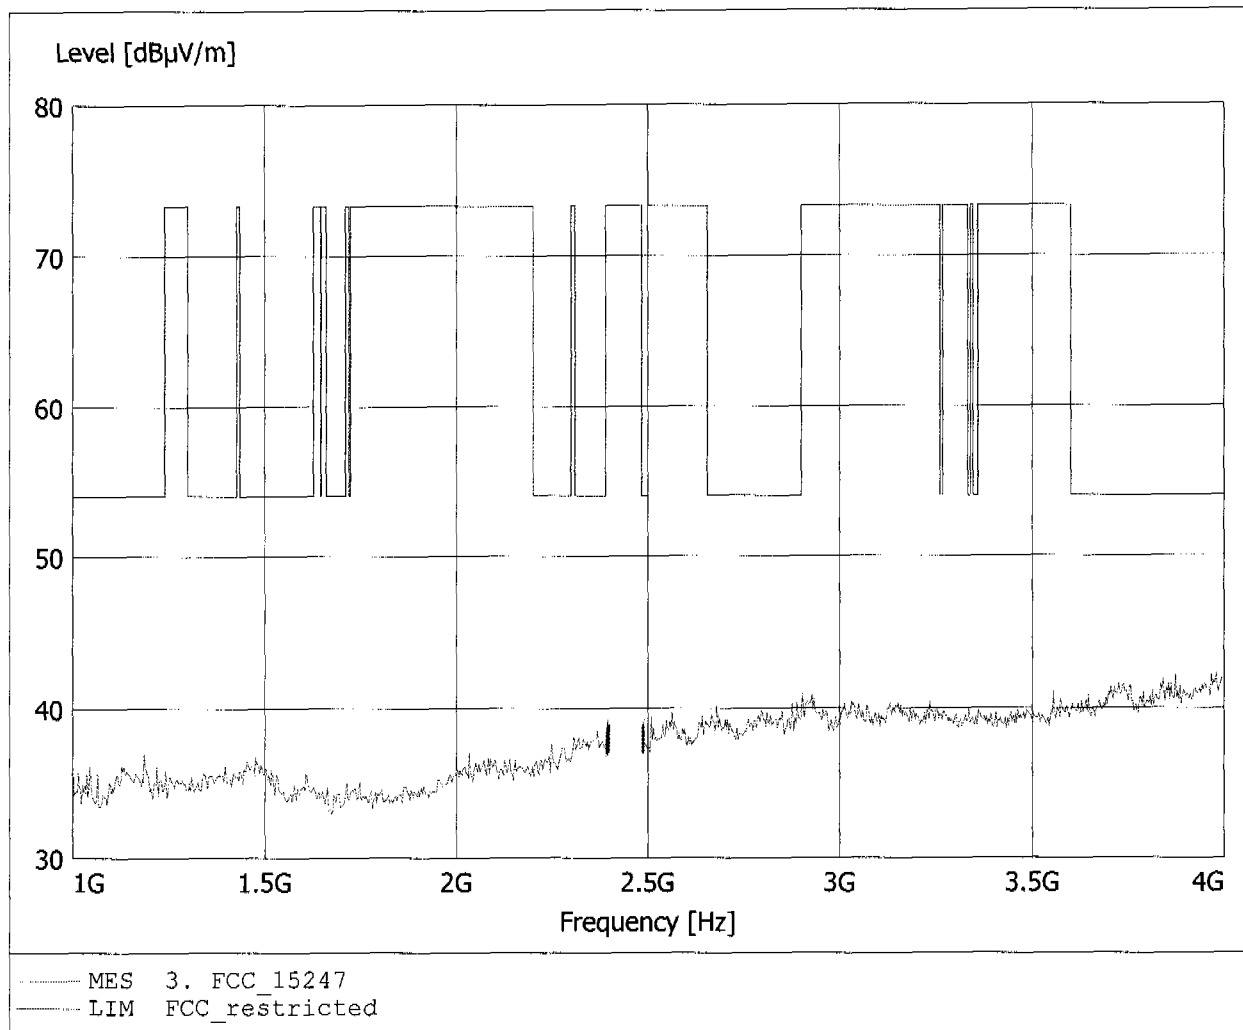


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2441 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.988GHz, Emax: 42.48dBµV/m, RBW: 1MHz

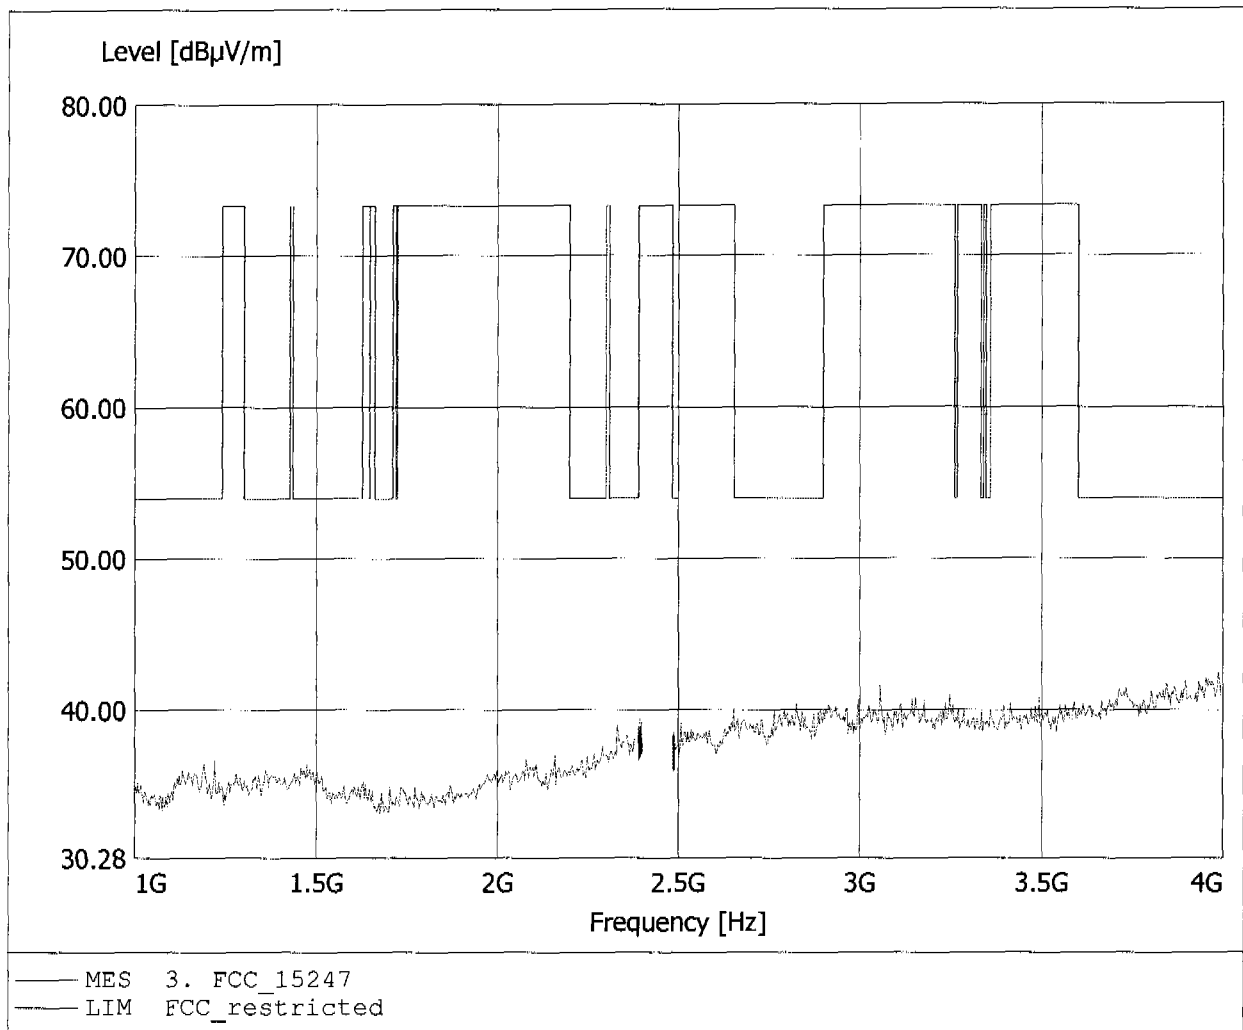


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2441 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 36.21dBµV/m, RBW: 1MHz

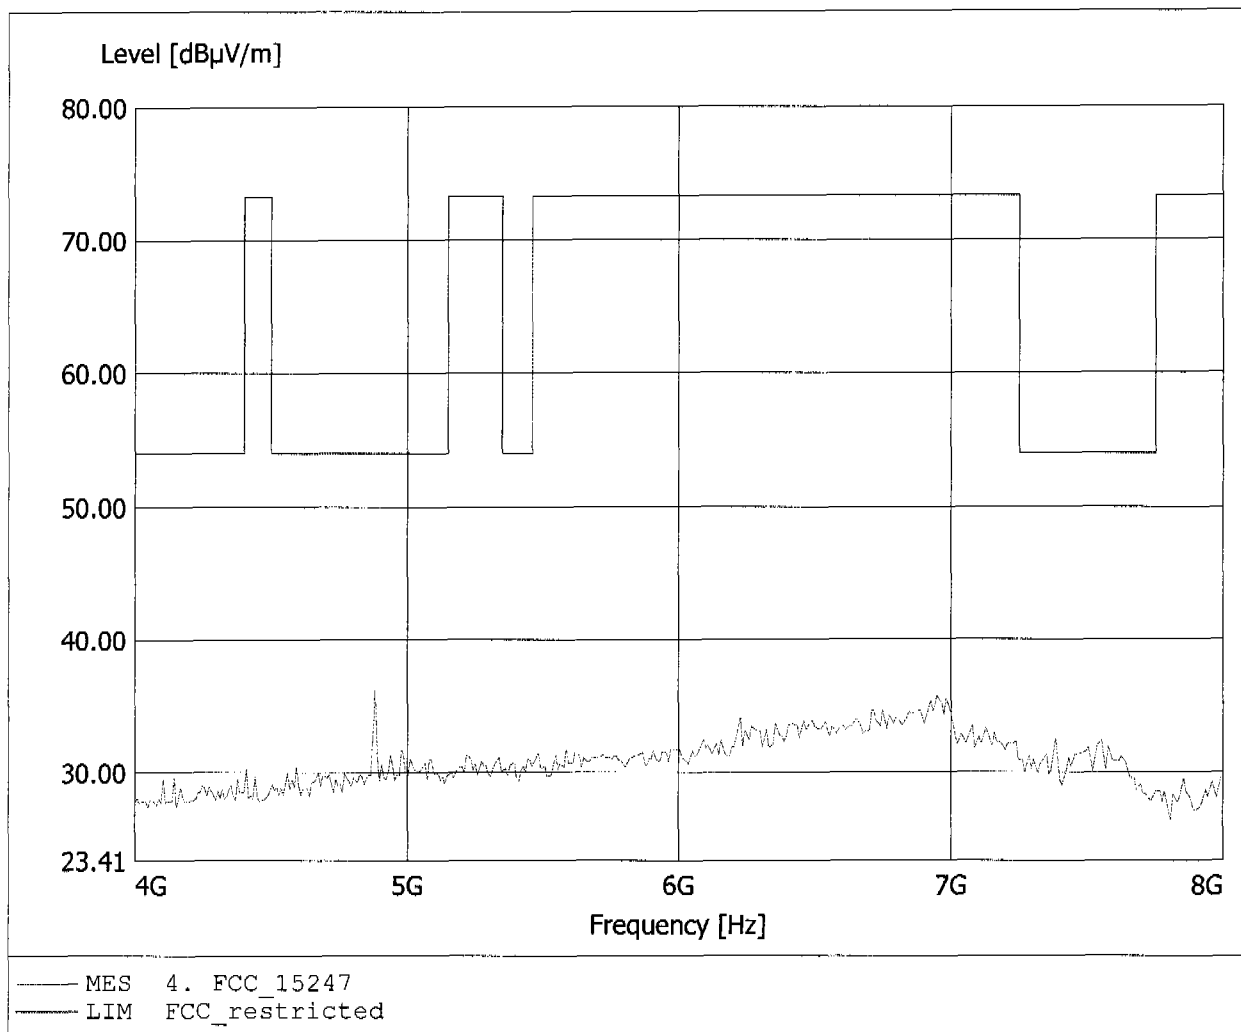


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2441 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 45.73dBµV/m, RBW: 1MHz

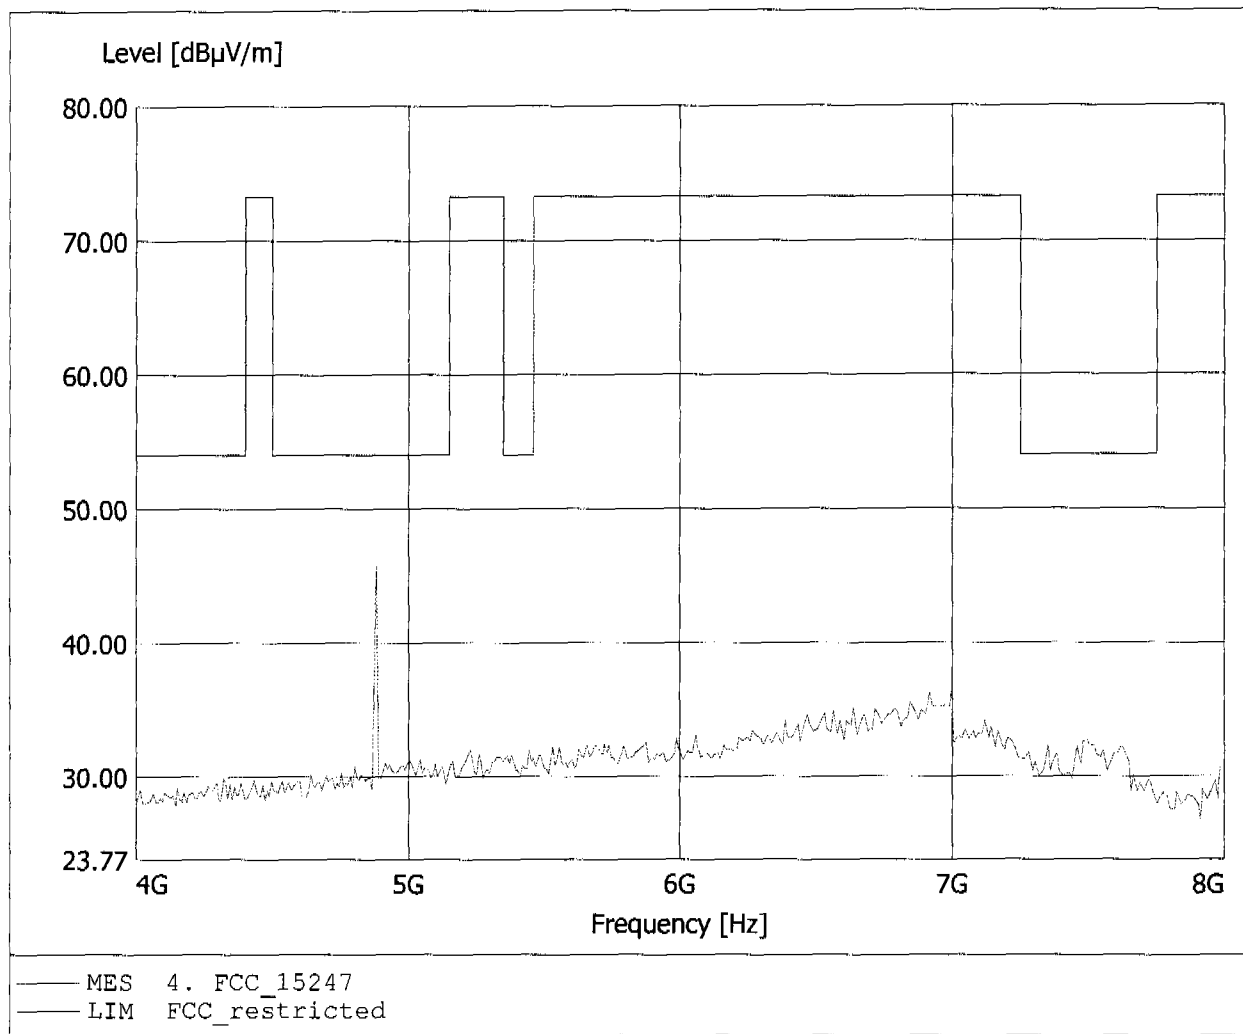


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2441 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.319GHz, Emax: 42.16dBµV/m, RBW: 1MHz

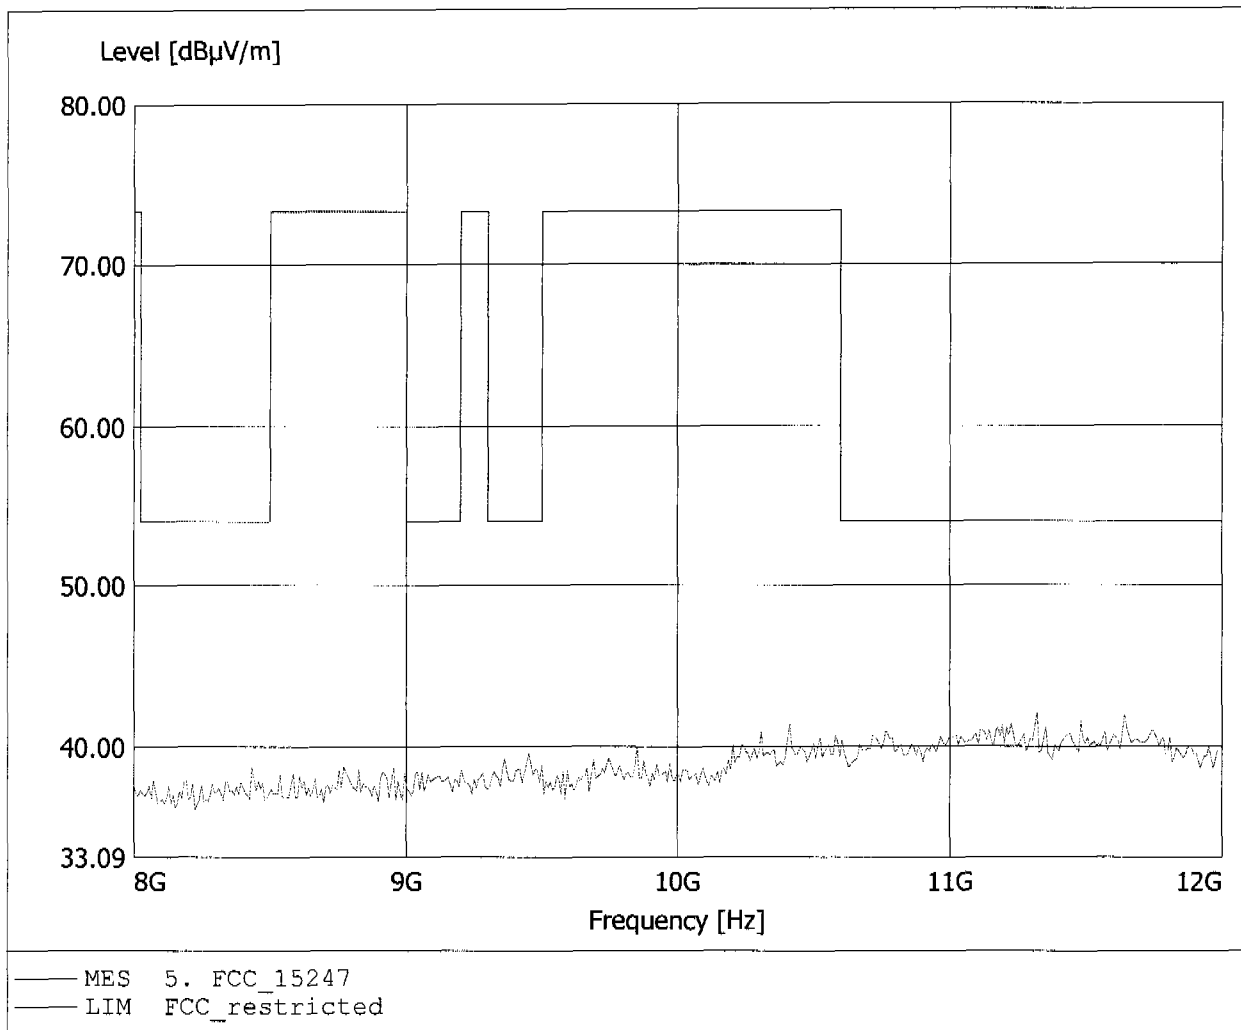


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2441 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 10.261GHz, Emax: 41.72dBµV/m, RBW: 1MHz

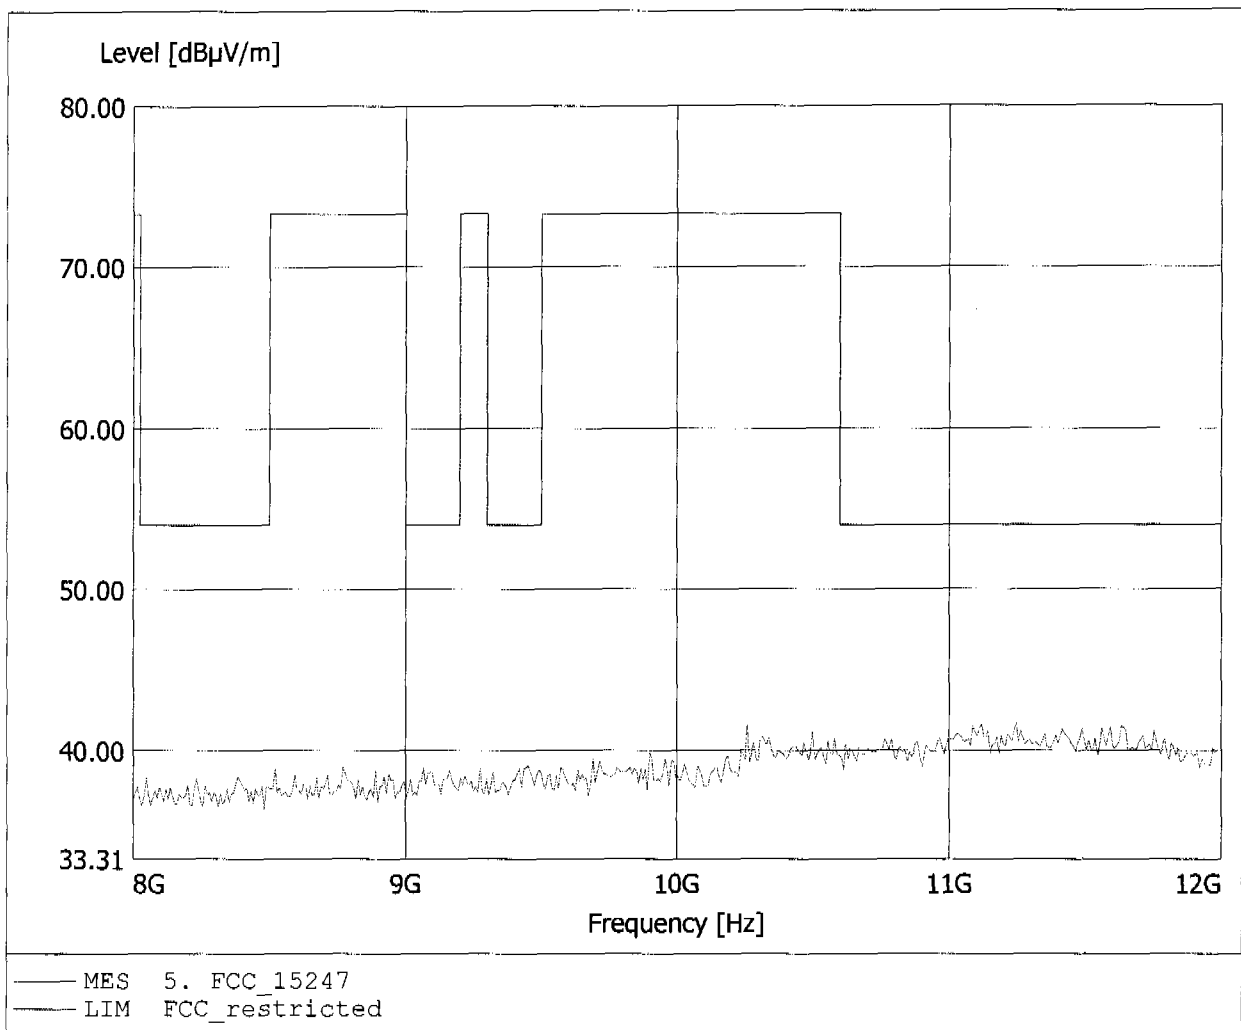


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2441 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 16.960GHz, Emax: 45.79dBµV/m, RBW: 1MHz

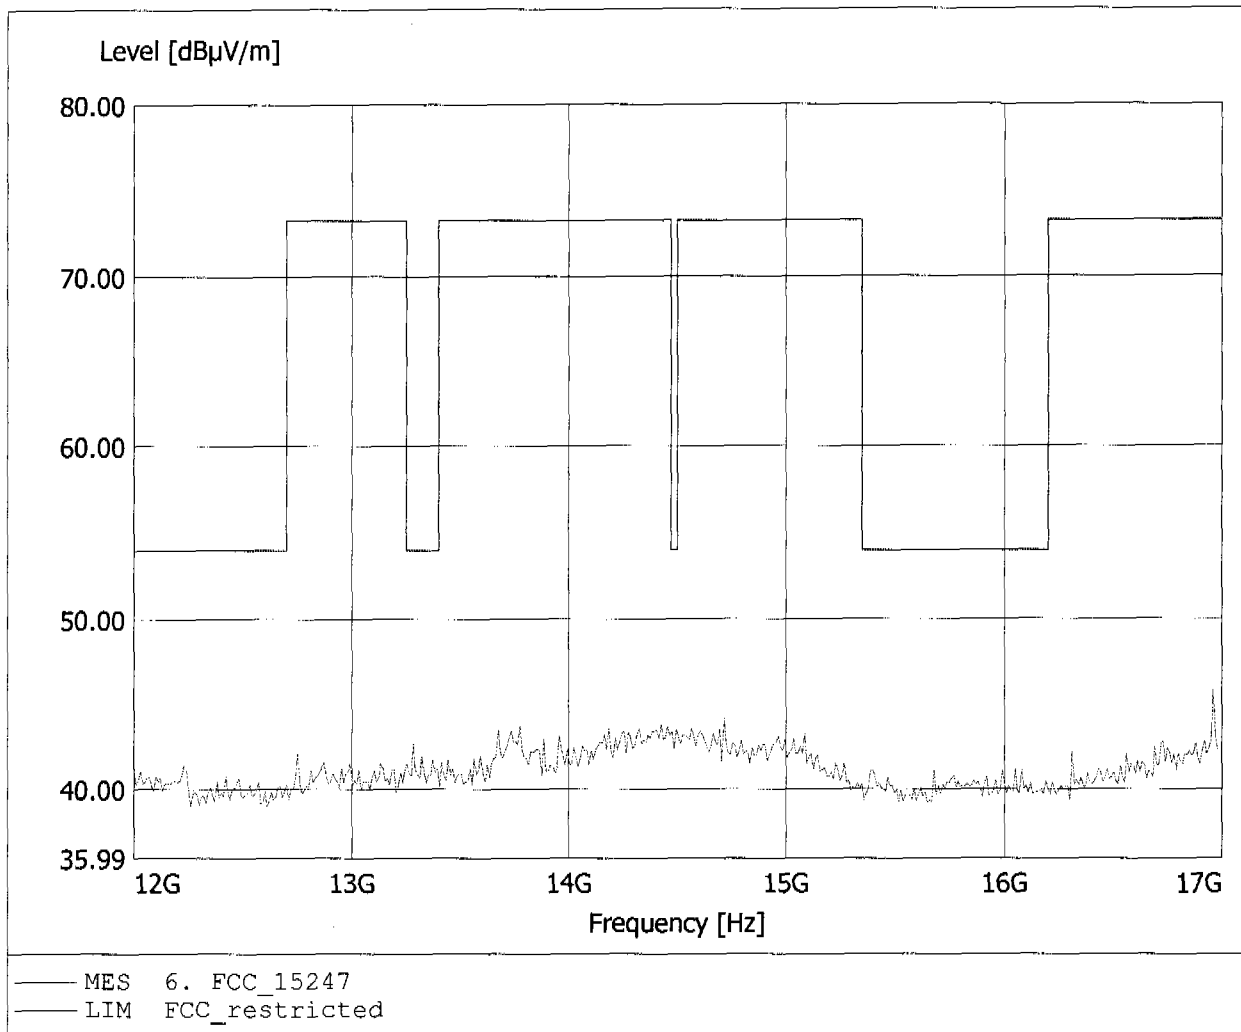


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2441 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.916GHz, Emax: 44.12dBµV/m, RBW: 1MHz

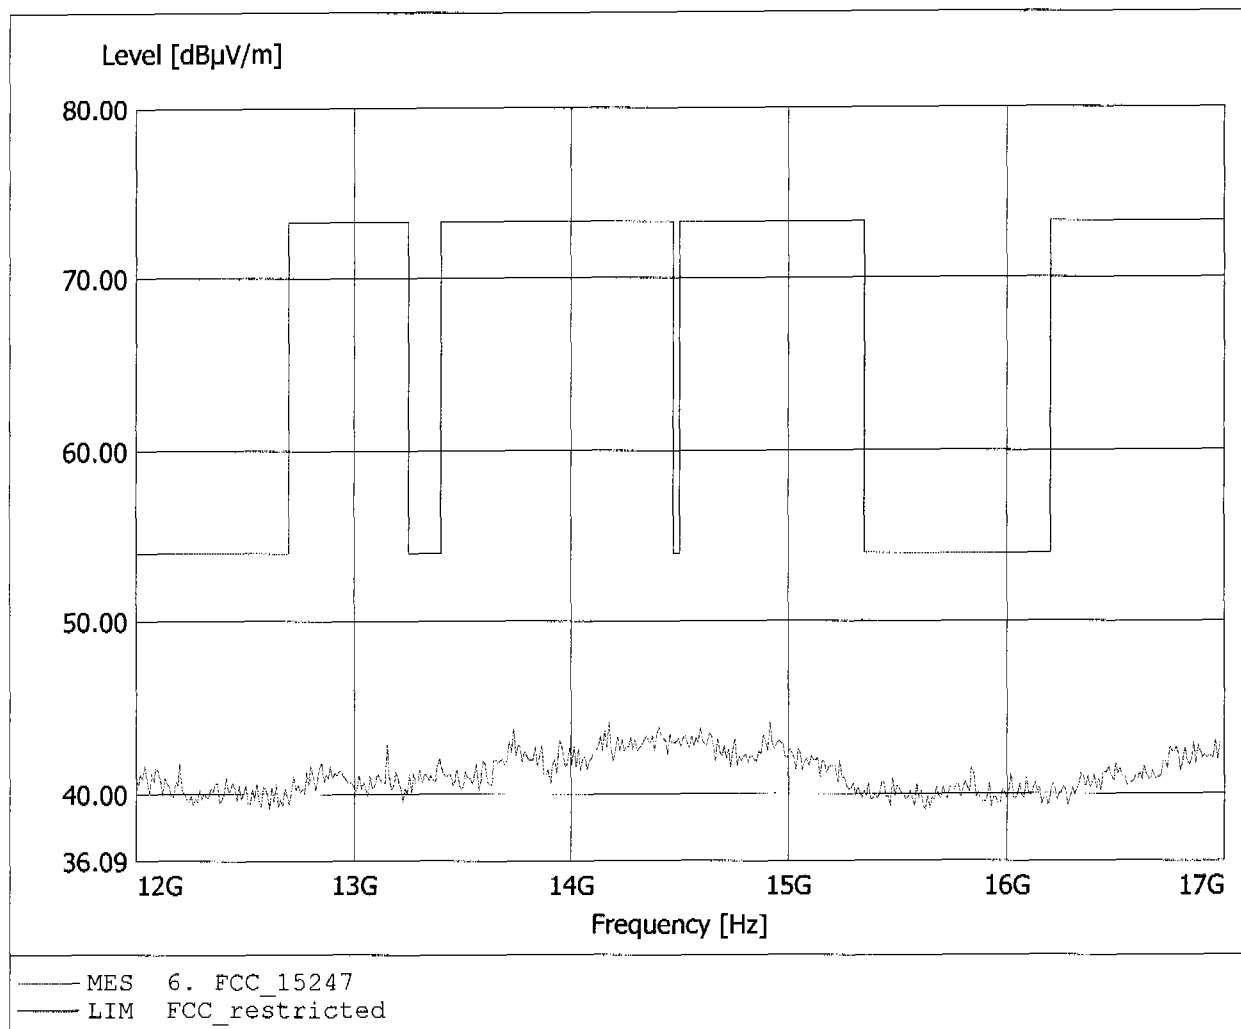


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2441 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.019GHz, Emax: 44.79dBµV/m, RBW: 1MHz

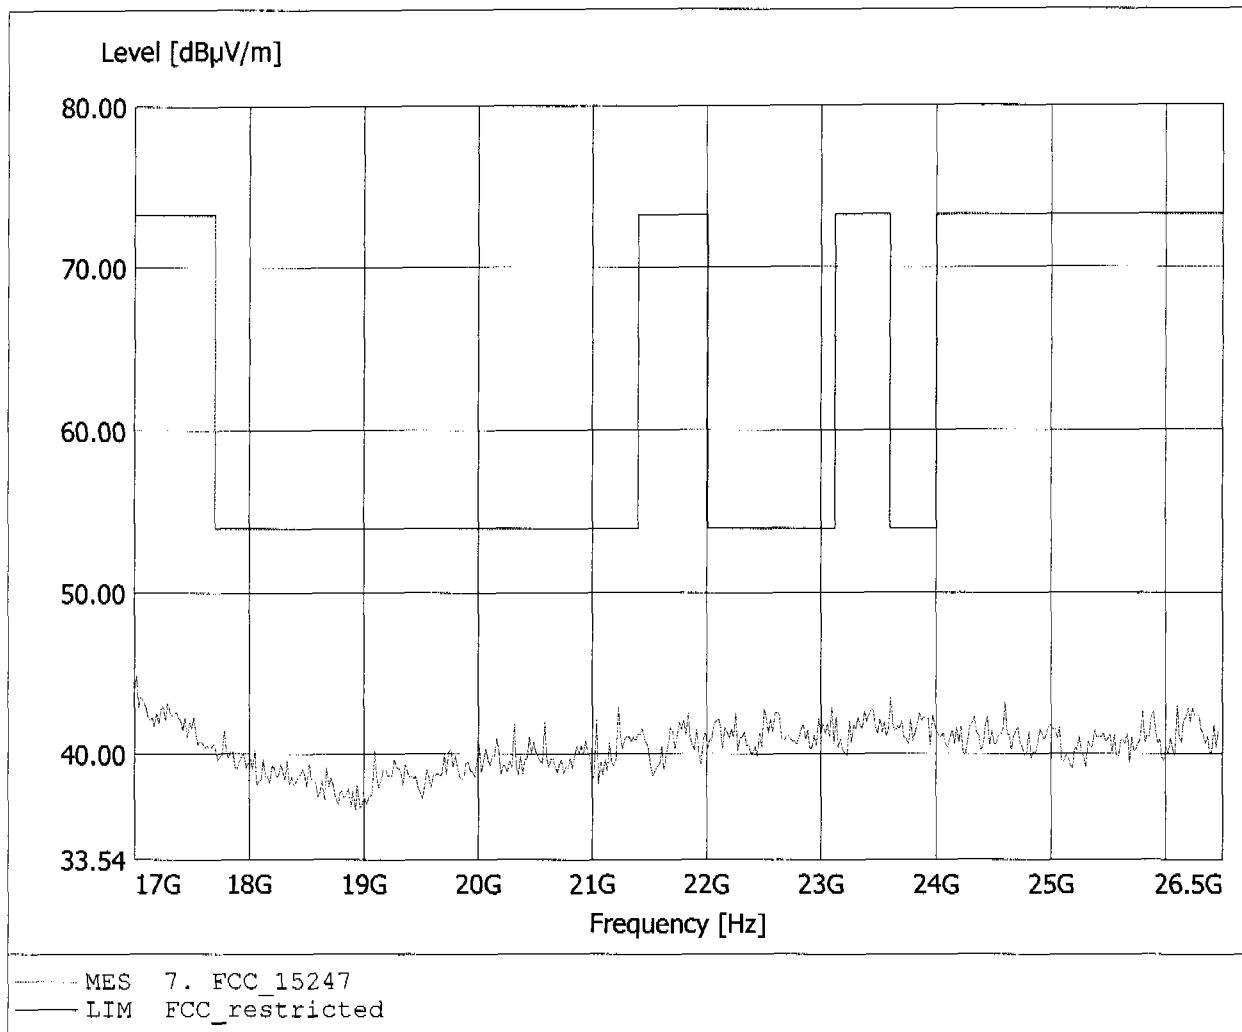


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2441 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 44.46dBµV/m, RBW: 1MHz

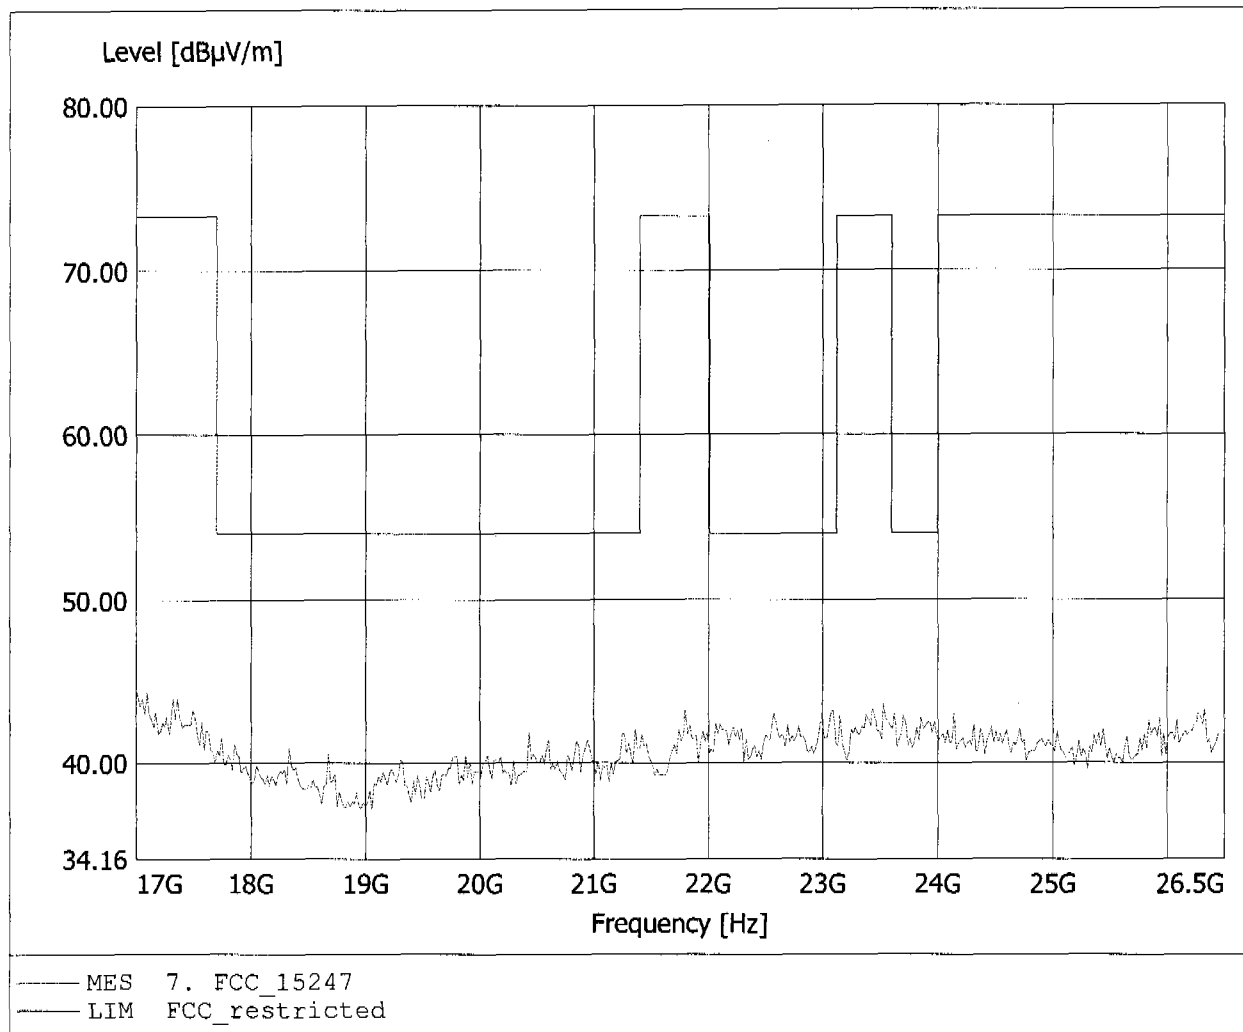


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2480 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 197.615MHz, Emax: 31.16dBµV/m, RBW: 100kHz

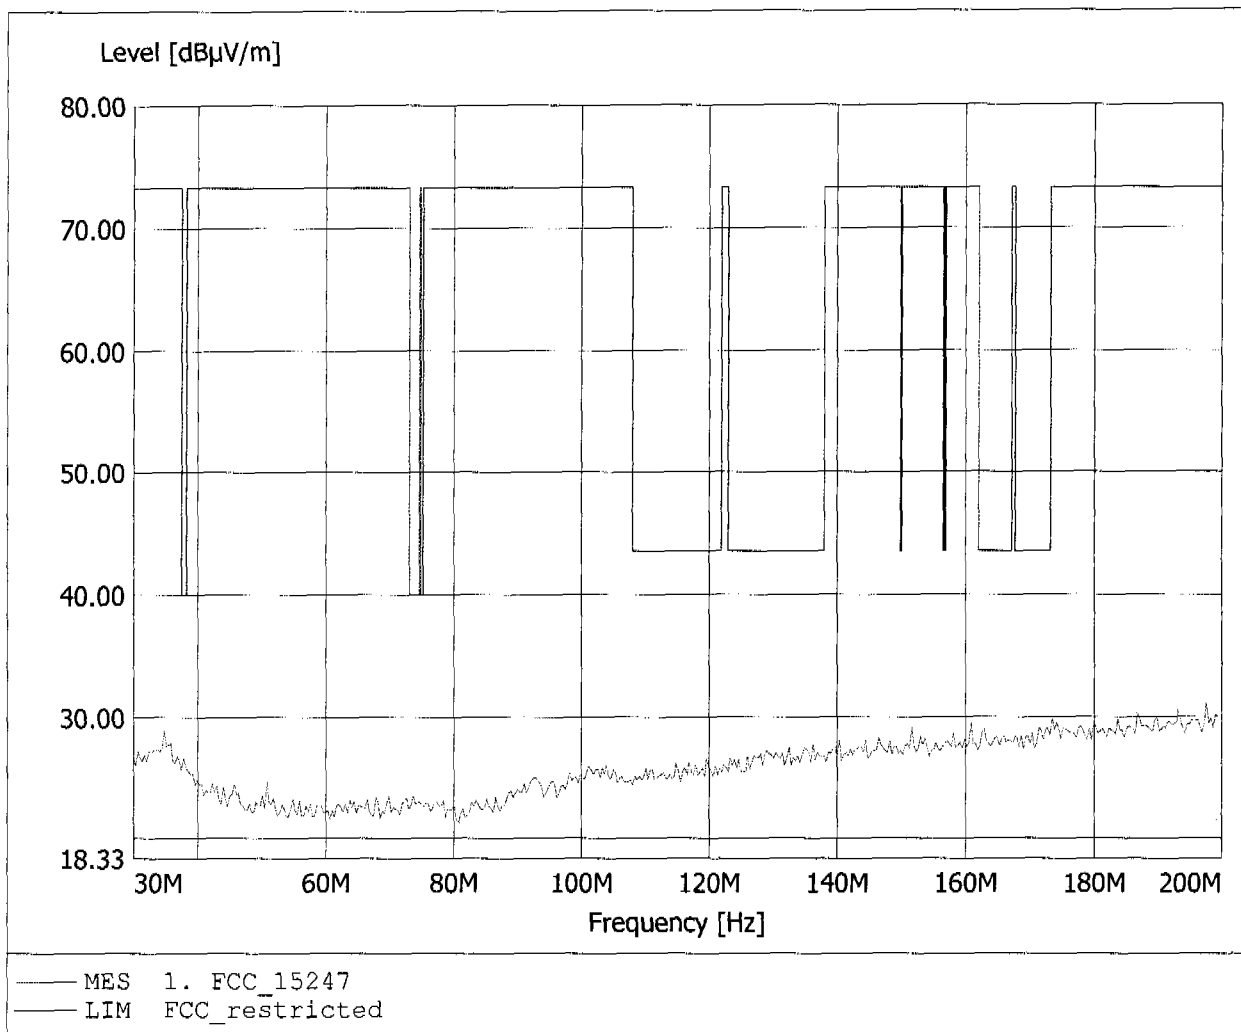


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2480 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 35.451MHz, Emax: 36.44dBµV/m, RBW: 100kHz

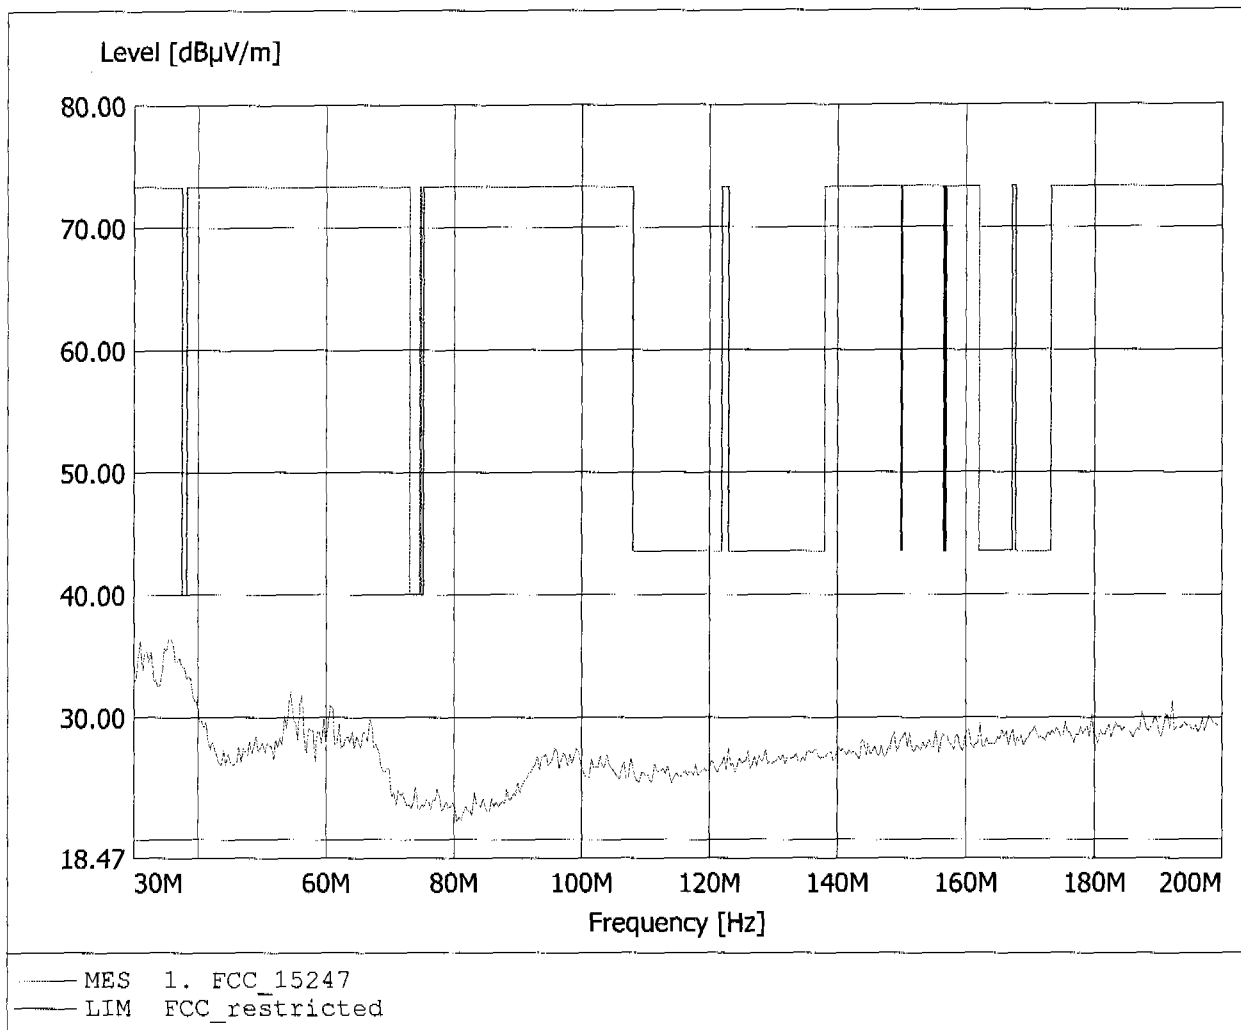


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2480 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 336.273MHz, Emax: 31.67dBµV/m, RBW: 100kHz

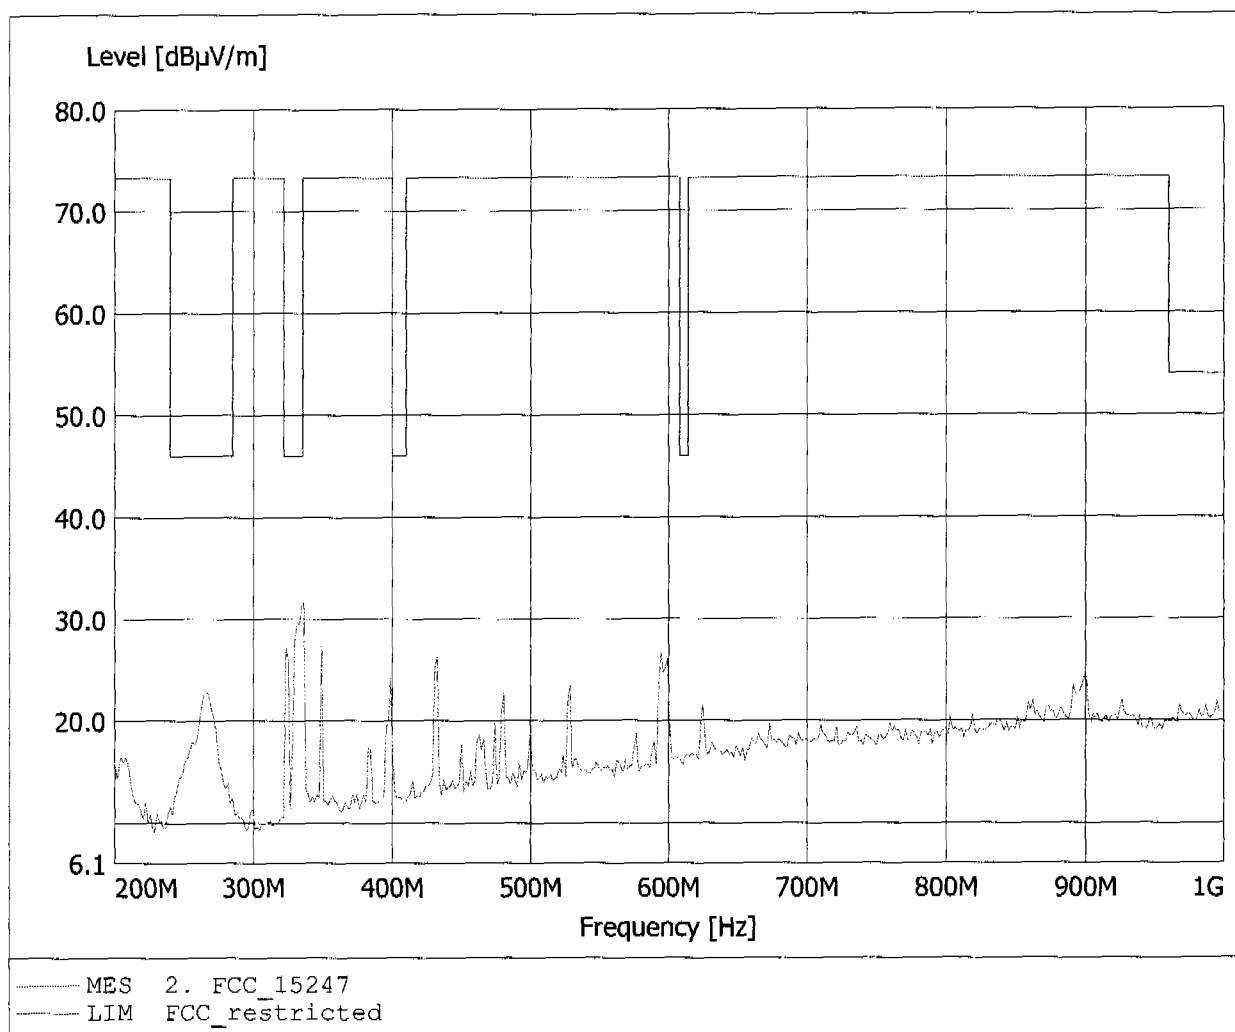


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2480 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 594.389MHz, Emax: 30.89dBµV/m, RBW: 100kHz

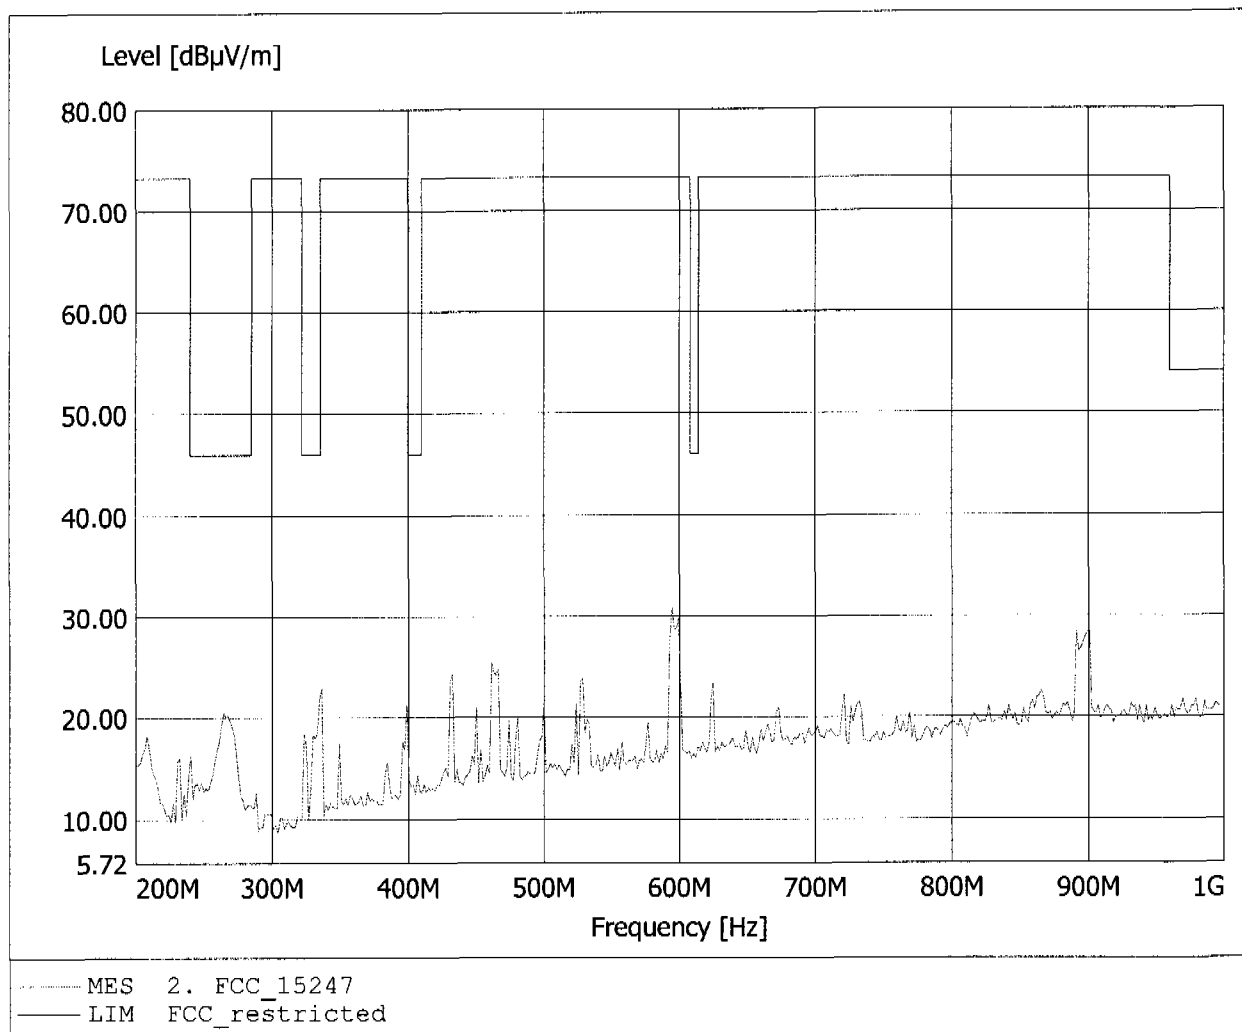


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2480 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 44.95dBµV/m, RBW: 1MHz

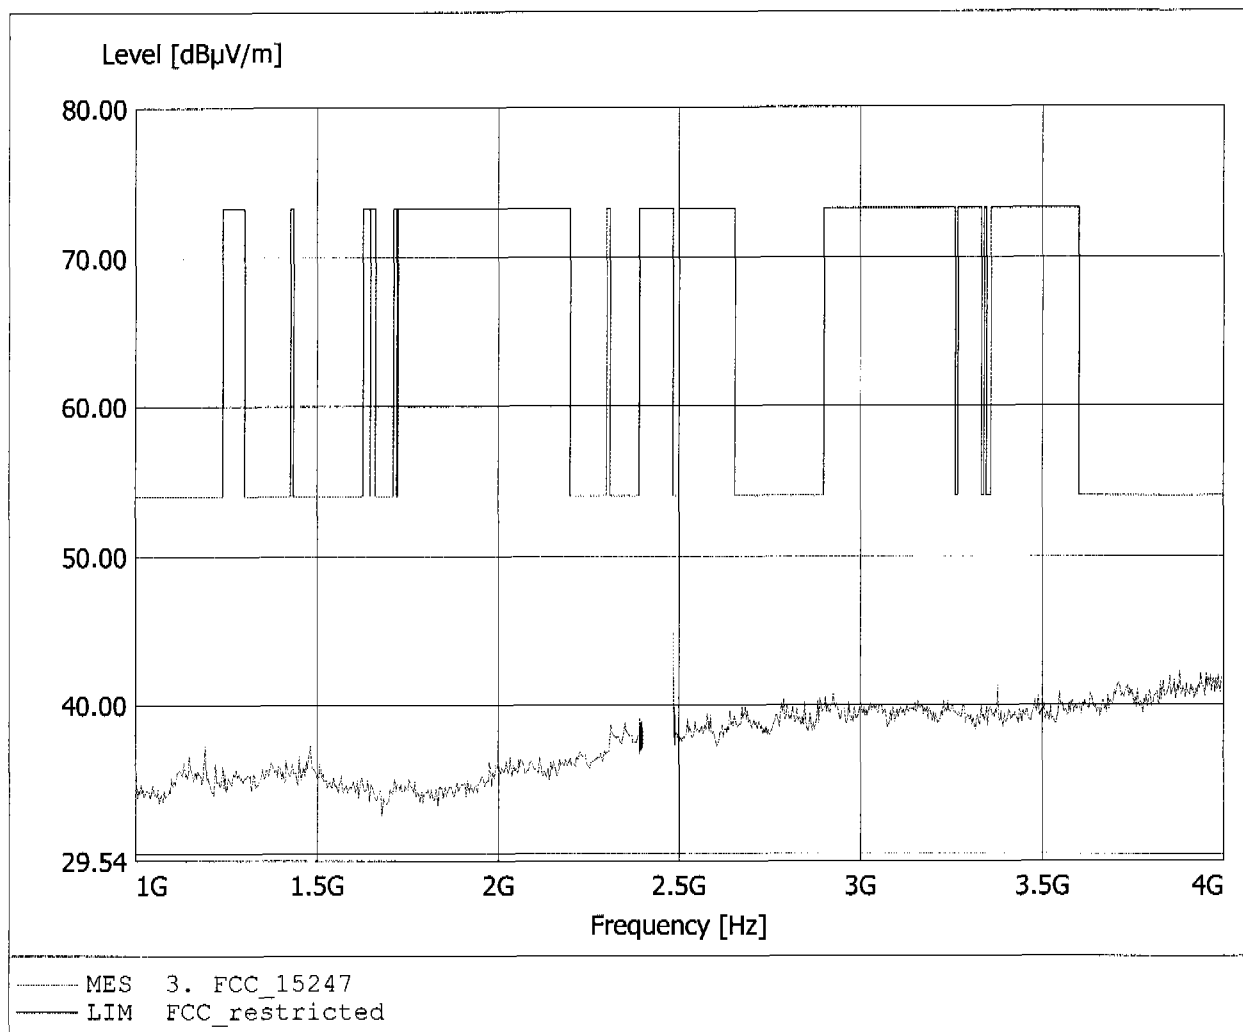


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2480 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 45.39dBµV/m, RBW: 1MHz

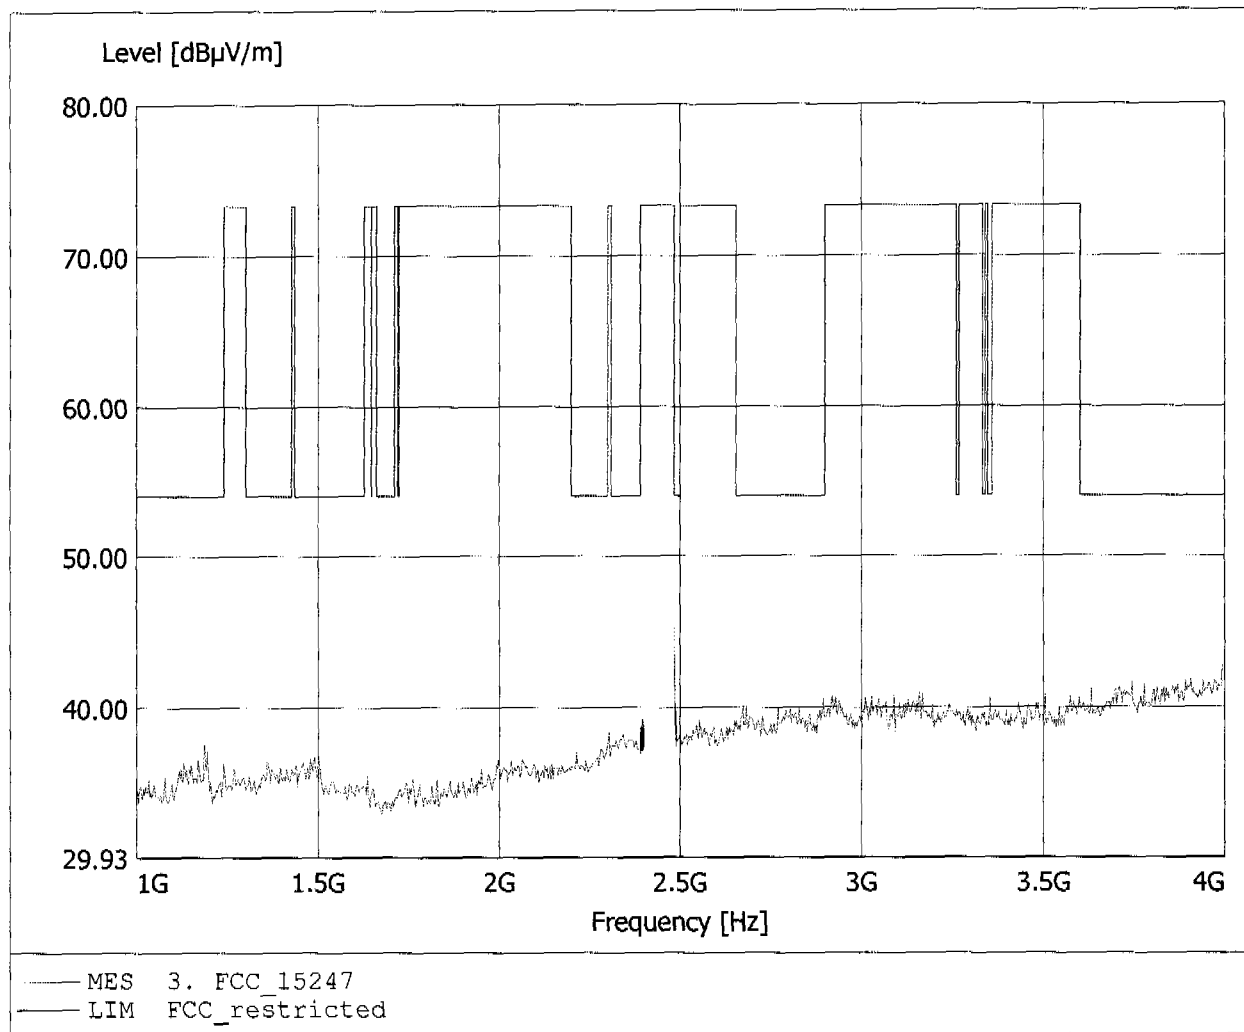


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2480 MHz
 Model: Siemens HHB-600
 Approval Holder: Siemens AG
 Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
 Test Site / Operator: ETS / Mr. Handrik
 Test Specification: according to §15.247, peak detector
 Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
 Comment 2: Freq: 4.954GHz, Emax: 37.37dBµV/m, RBW: 1MHz

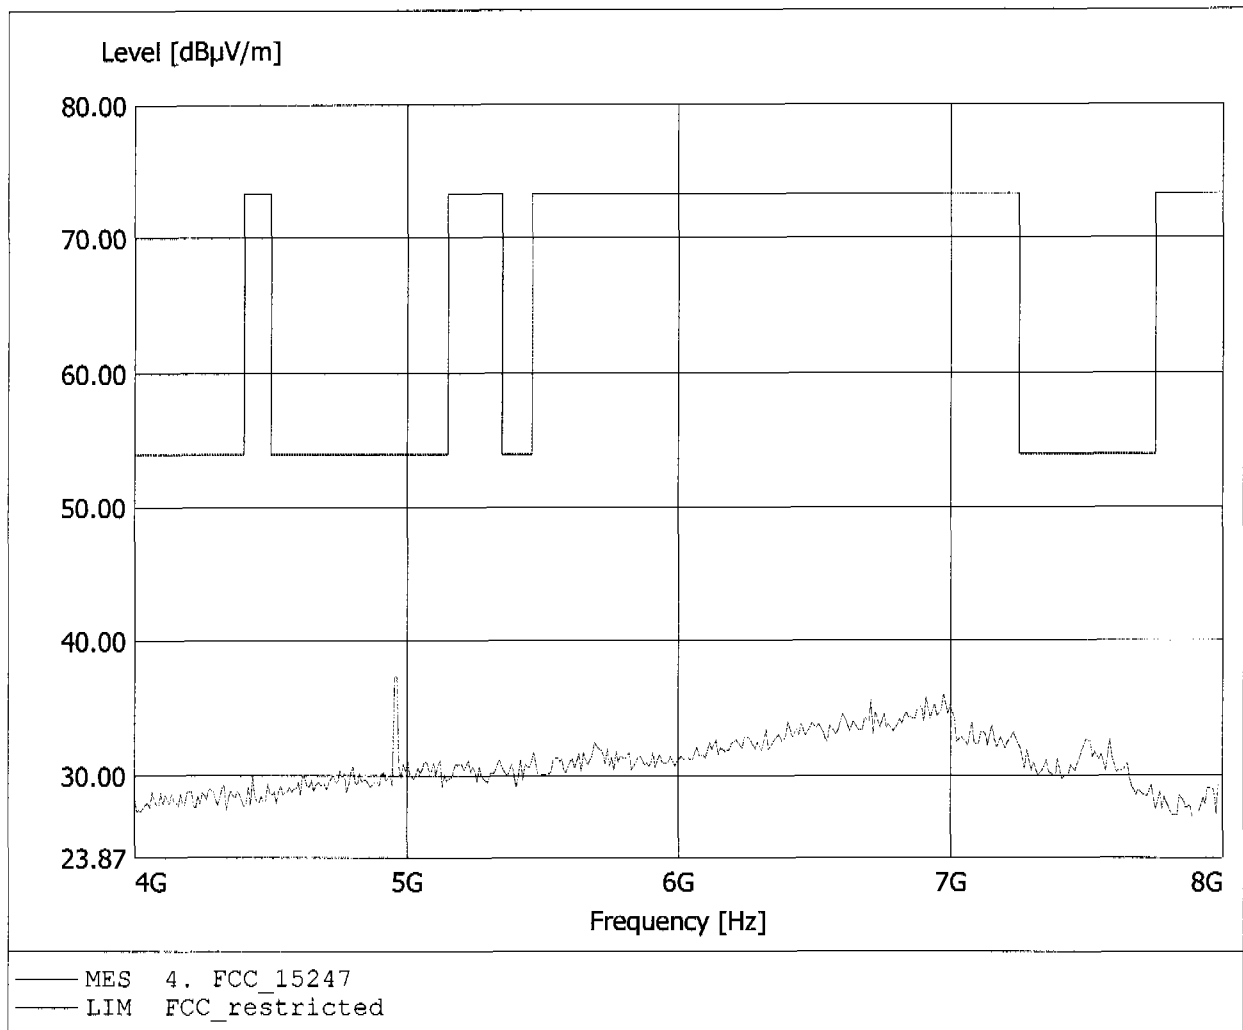


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2480 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.954GHz, Emax: 43.58dBµV/m, RBW: 1MHz

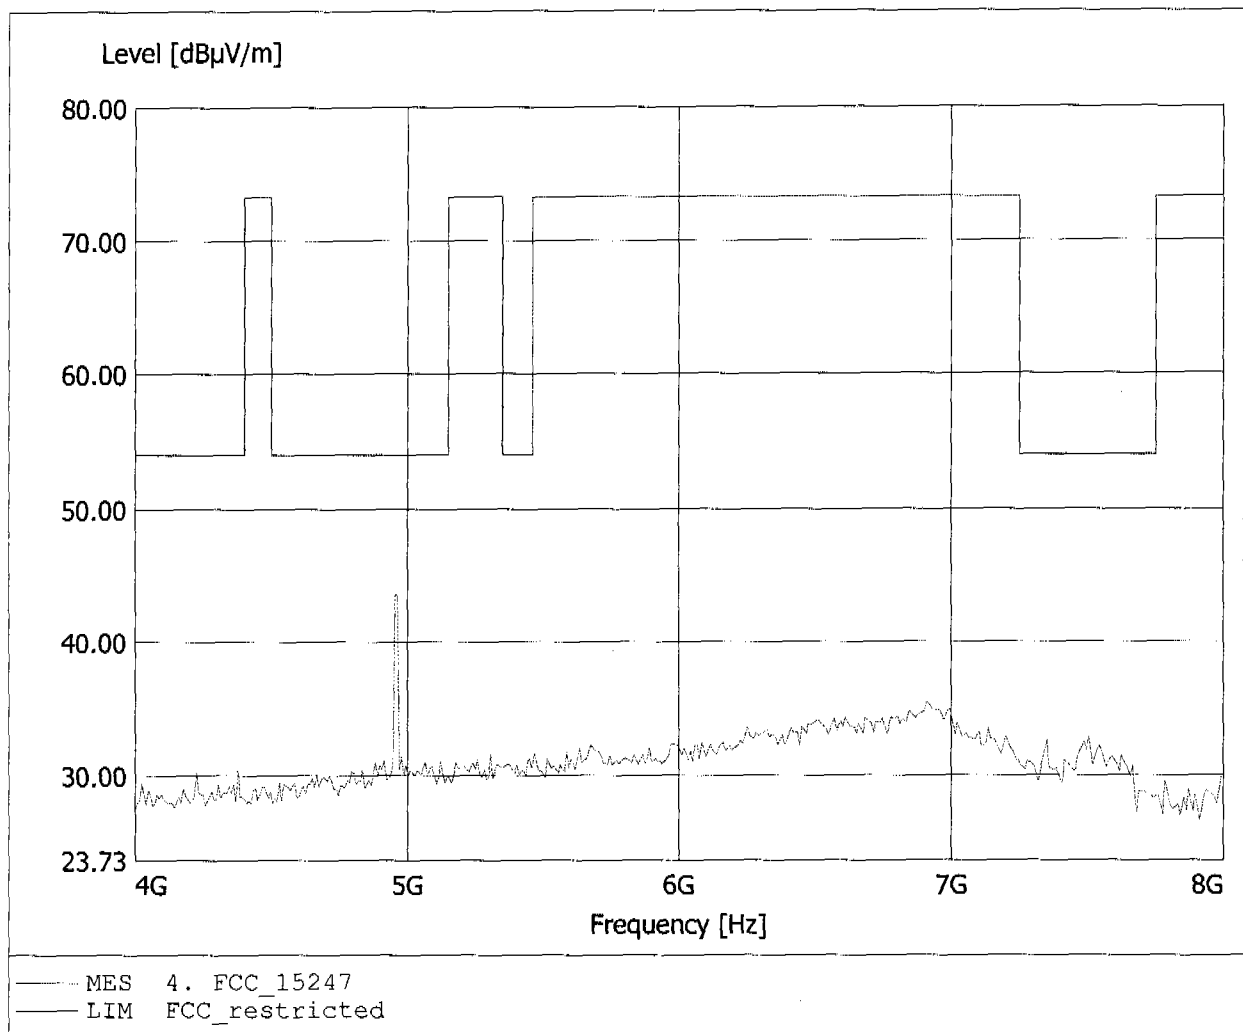


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2480 MHz
 Model: Siemens HHB-600
 Approval Holder: Siemens AG
 Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
 Test Site / Operator: ETS / Mr. Handrik
 Test Specification: according to §15.247, peak detector
 Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
 Comment 2: Freq: 11.086GHz, Emax: 41.99dBµV/m, RBW: 1MHz

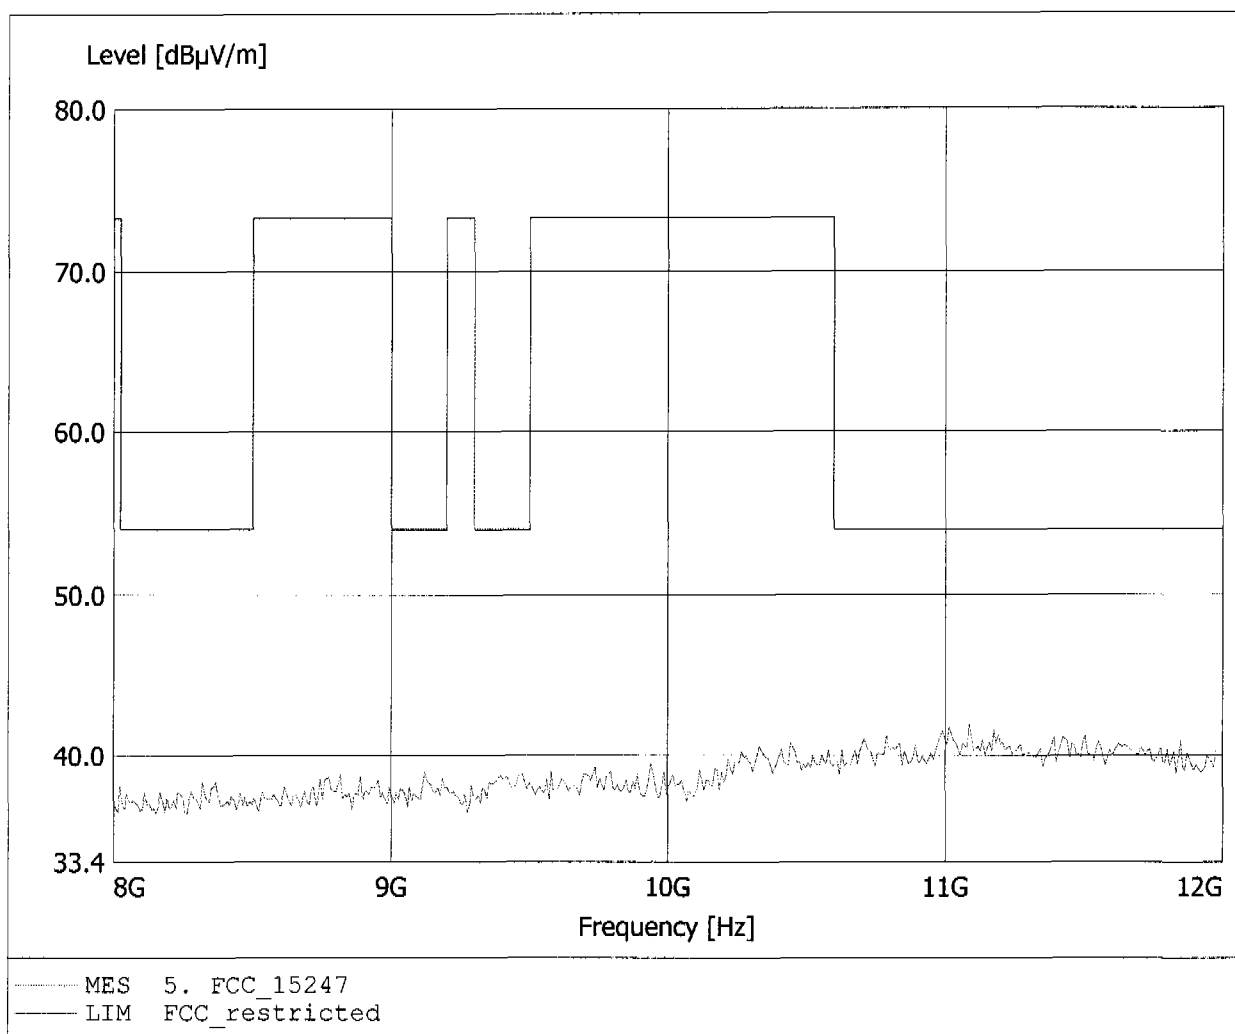


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2480 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.703GHz, Emax: 41.67dBµV/m, RBW: 1MHz

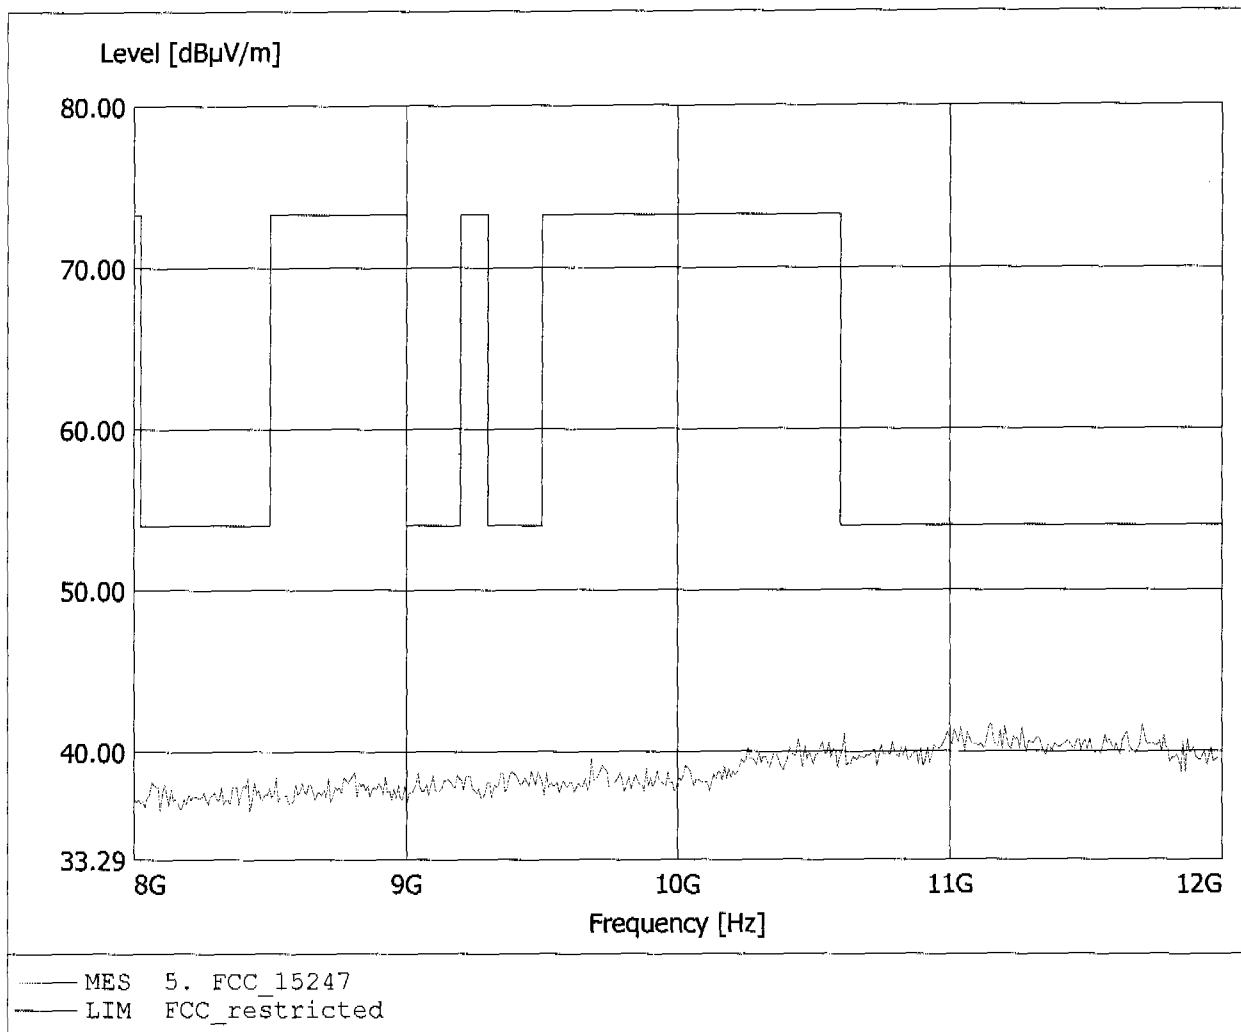


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2480 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.405GHz, Emax: 44.48dBµV/m, RBW: 1MHz

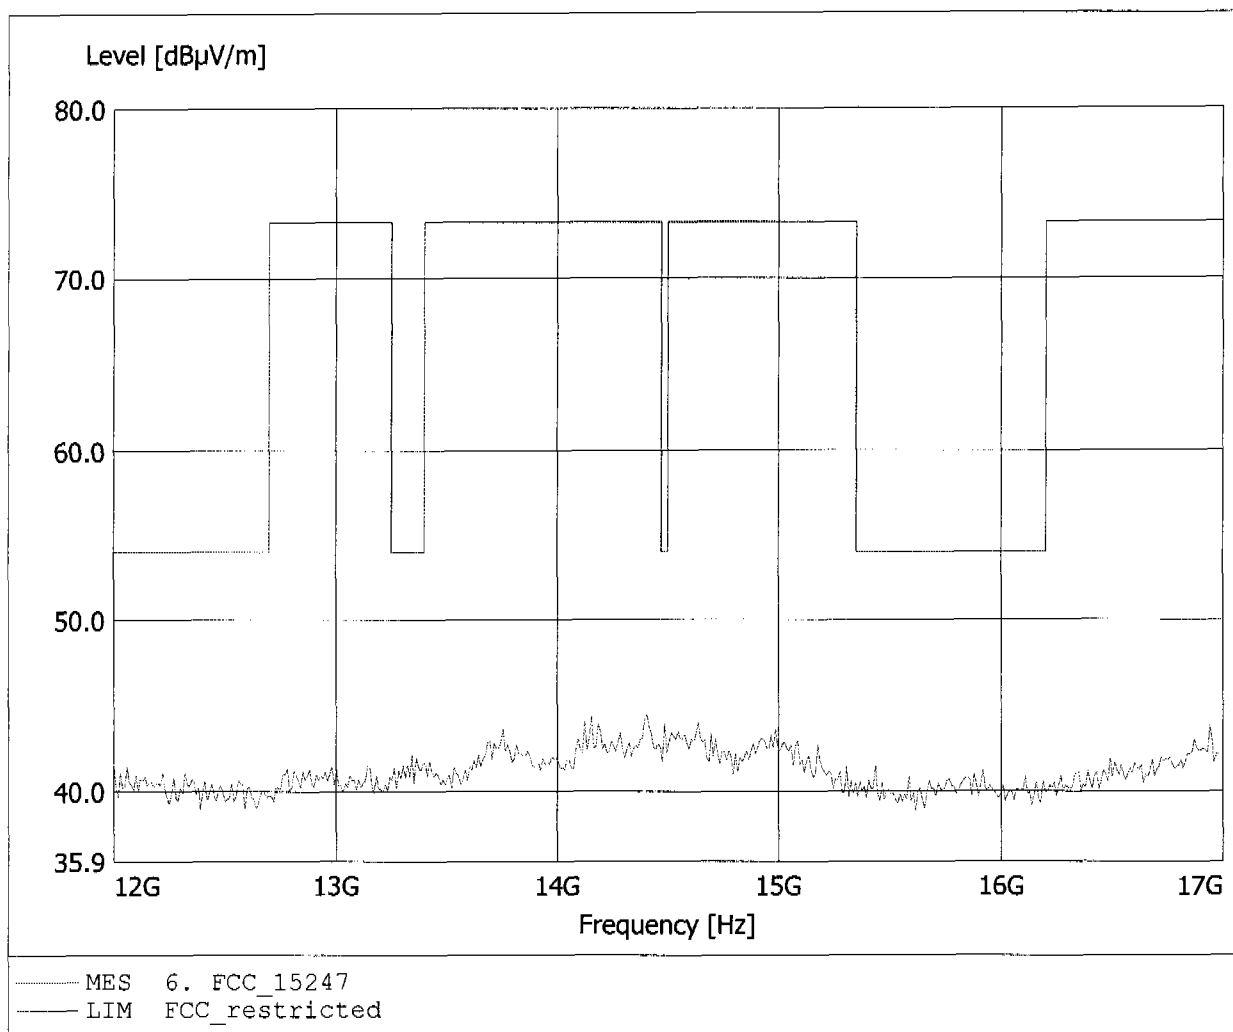


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2480 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.365GHz, Emax: 44.88dBµV/m, RBW: 1MHz

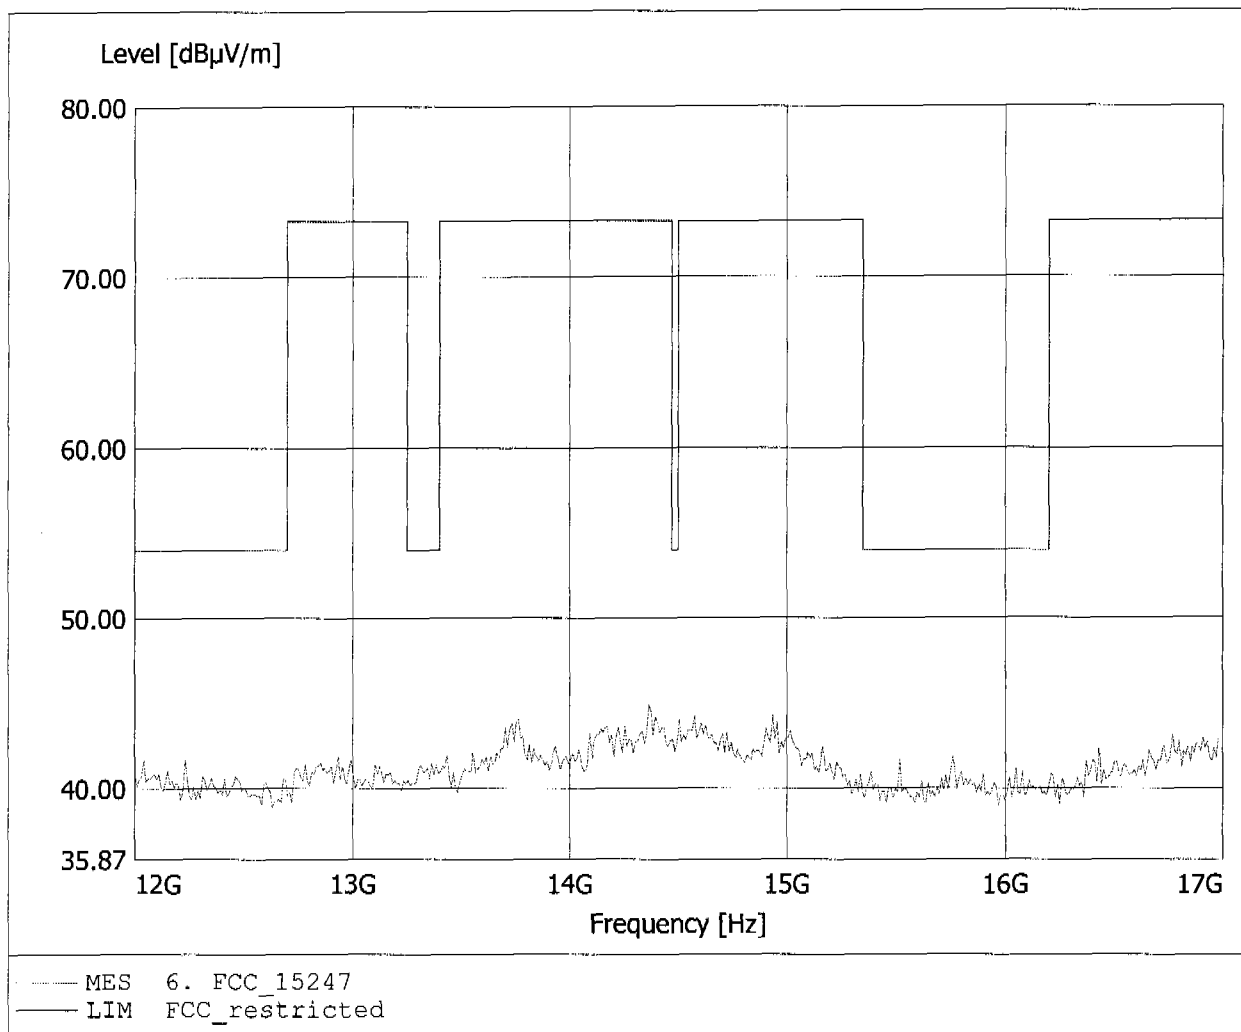


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2480 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.076GHz, Emax: 44.71dBµV/m, RBW: 1MHz

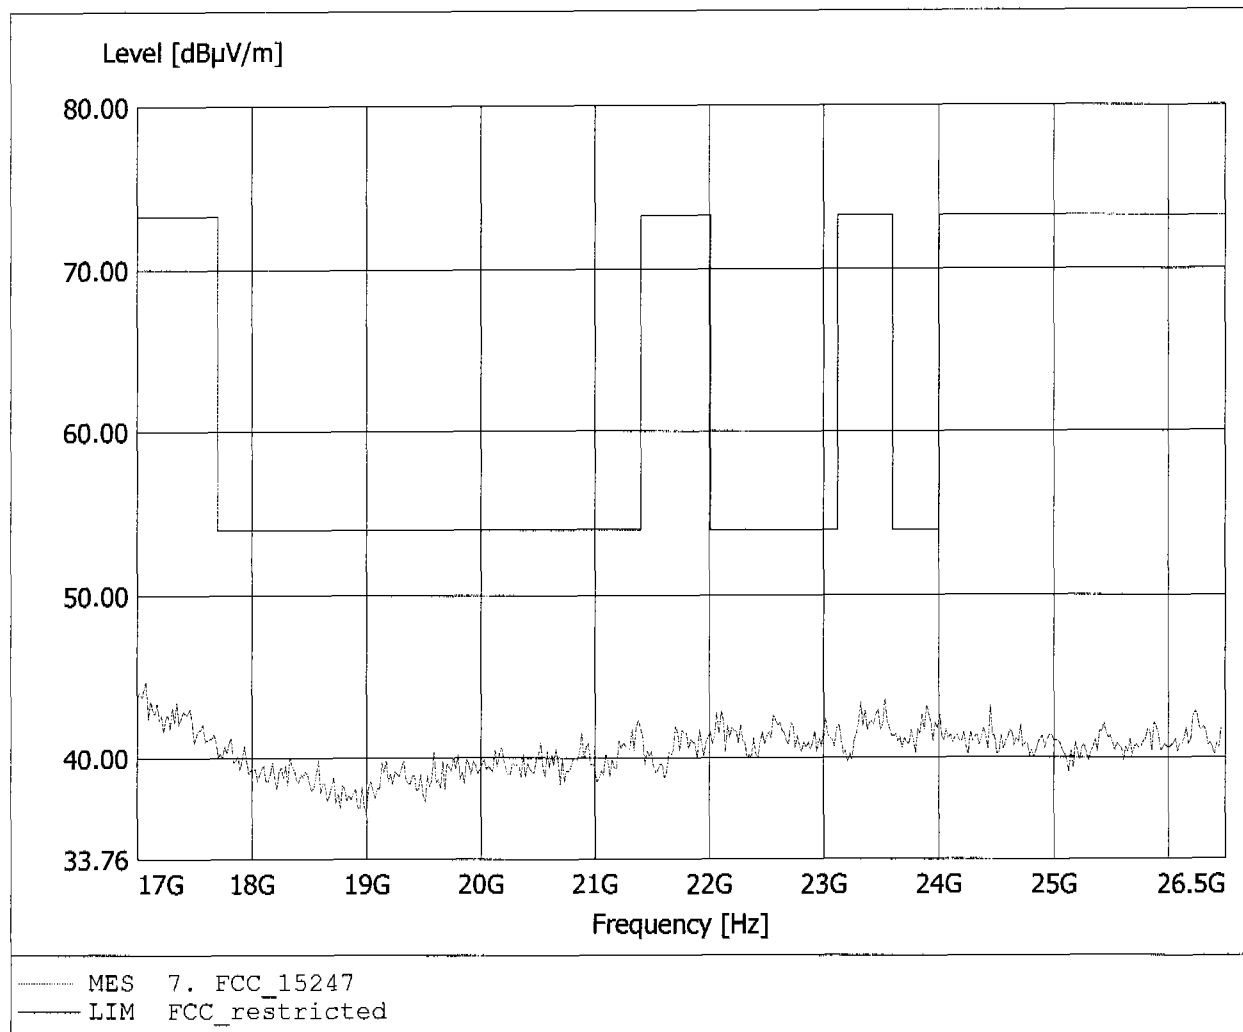

**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Bluetooth Headset Classic / 2480 MHz
Model: Siemens HHB-600
Approval Holder: Siemens AG
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.019GHz, Emax: 45.27dBµV/m, RBW: 1MHz

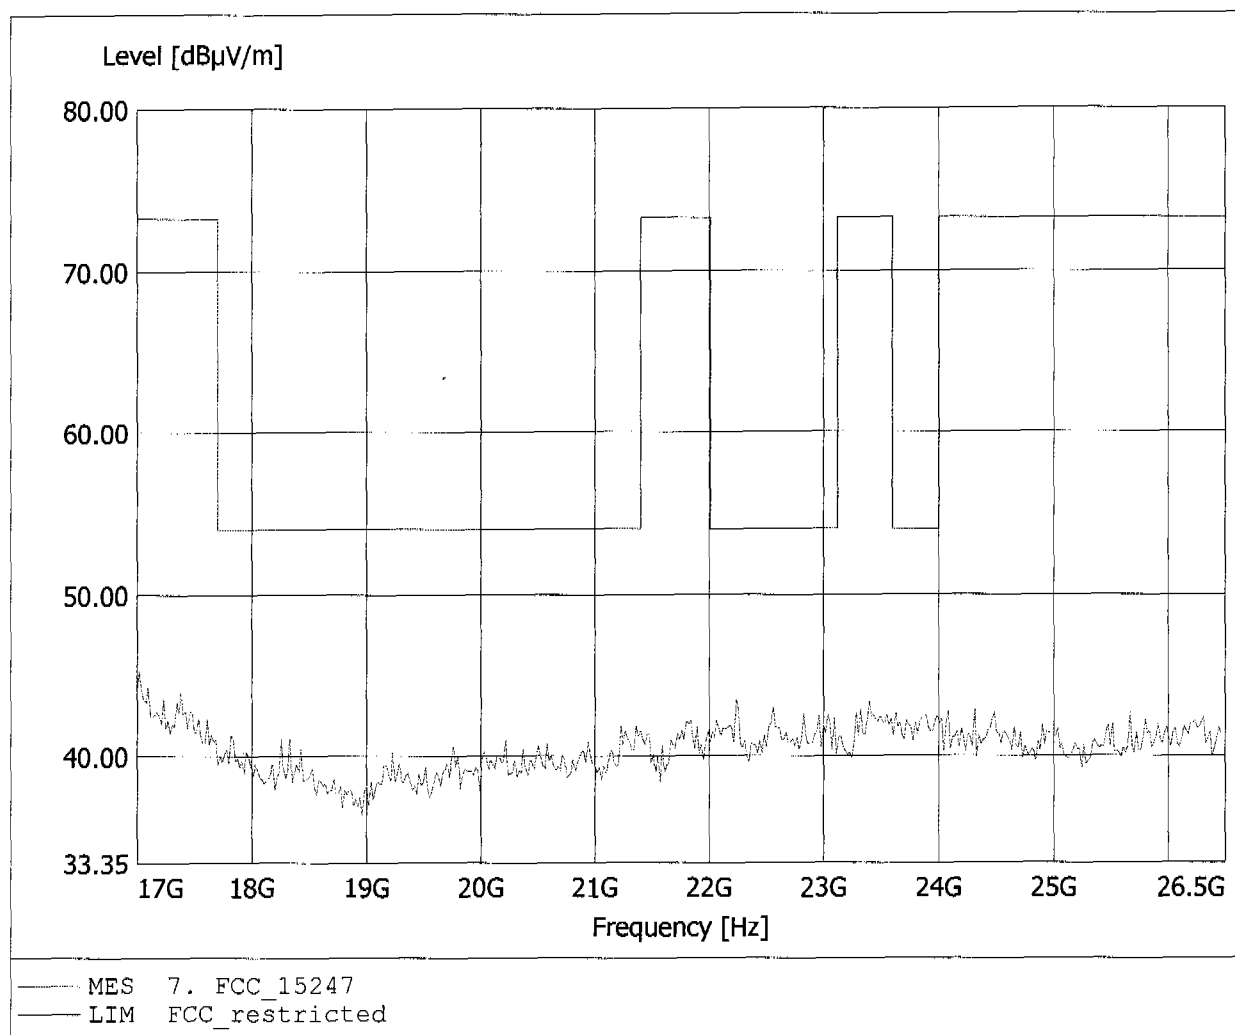



Appendix D

Spurious Emissions conducted - Transmitter operating




Appendix E

Carrier Frequency Separation



Delta 1 [T1] RBW 100 kHz RF Att 40 dB
Ref Lvl 0.10 dB VBW 100 kHz
10 dBm 1.00961924 MHz SWT 5 ms Unit dBm

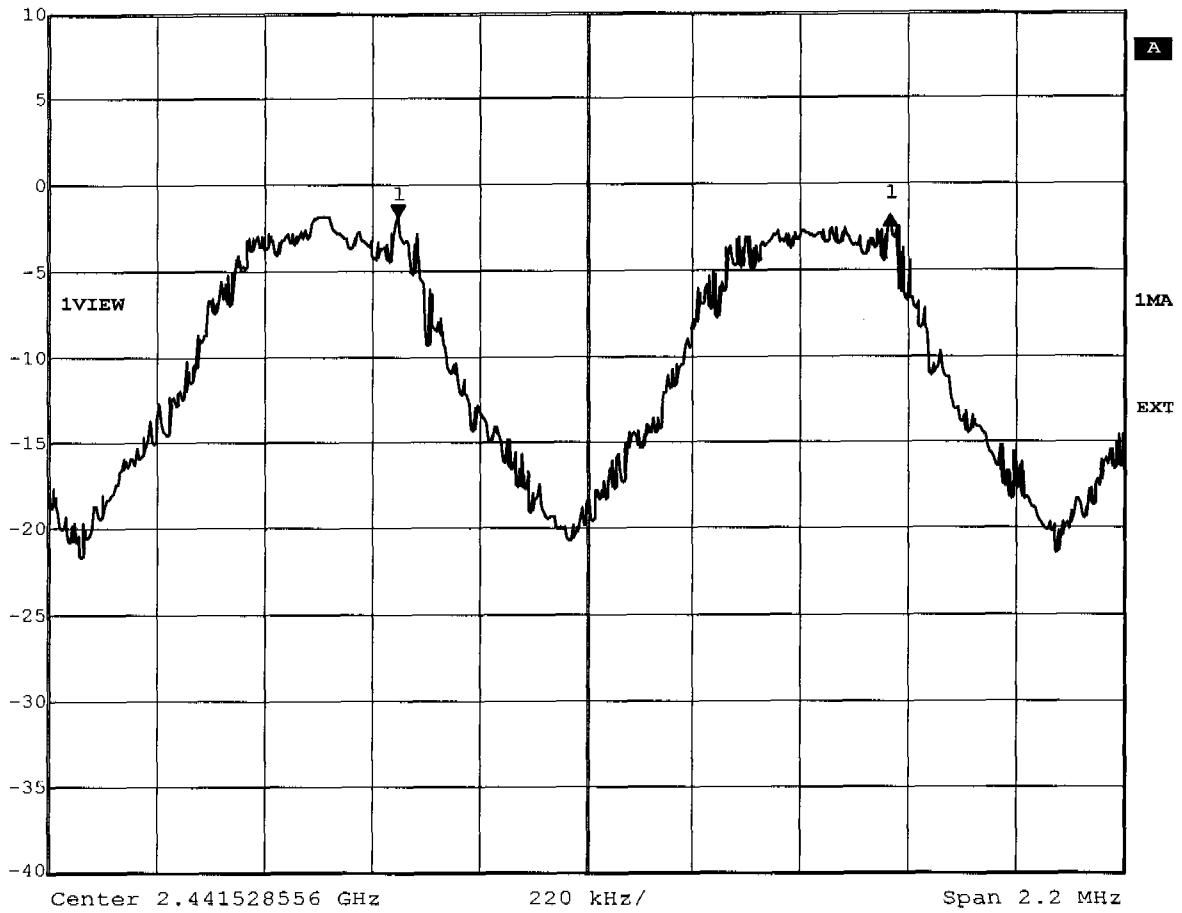

Title: Carrier Frequency Separation
Comment A: Siemens HHB-600
Date: 21.JAN.2004 12:42:49




Appendix F

Number of Hopping Frequencies




Marker 1 [T1] RBW 300 kHz RF Att 50 dB
Ref Lvl -2.20 dBm VBW 300 kHz
20 dBm 2.41499900 GHz SWT 5 ms Unit dBm

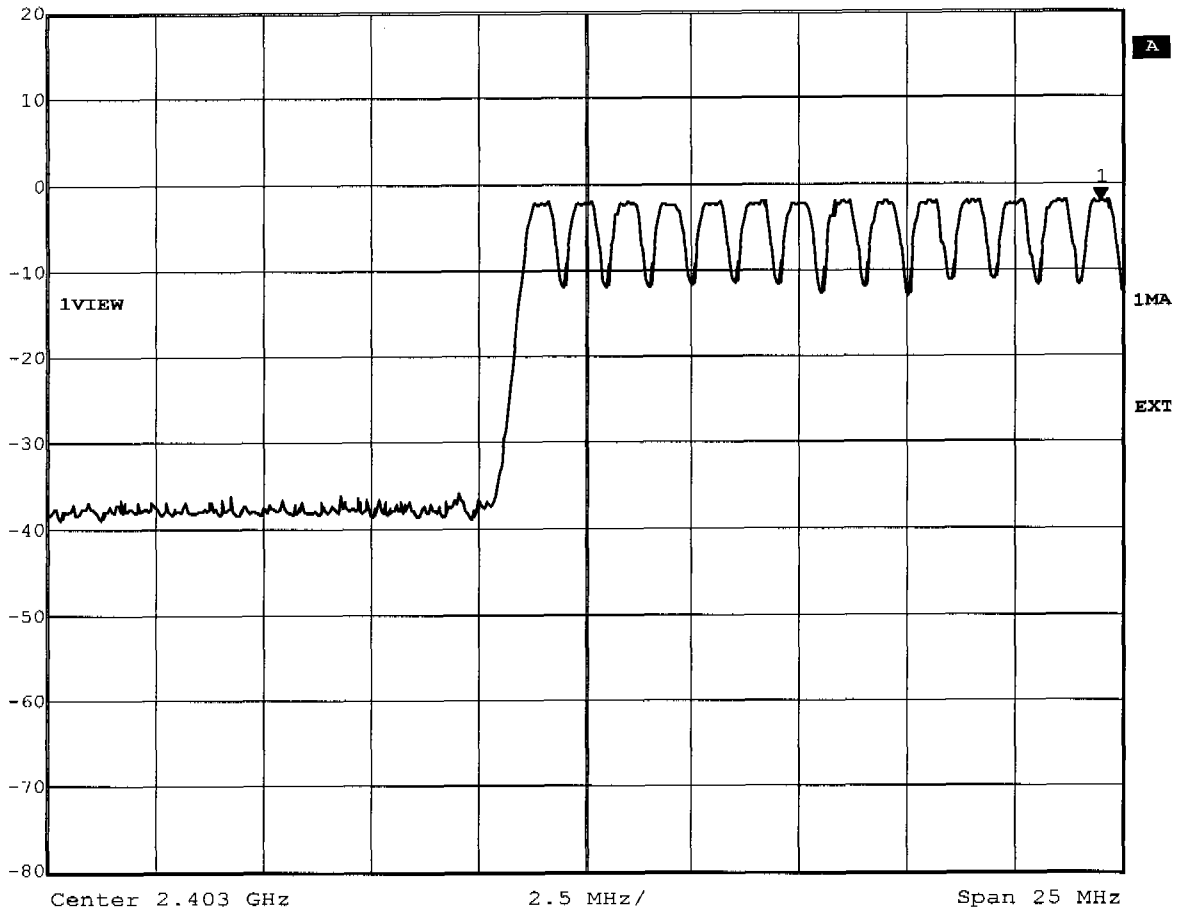

Title: Number of Hopping Frequencies Ch.: 0-13
Comment A: Siemens HHB-600
Date: 21.JAN.2004 13:35:52




Marker 1 [T1] RBW 300 kHz RF Att 50 dB
Ref Lvl -1.72 dBm VBW 300 kHz
25 dBm 2.43719339 GHz SWT 5 ms Unit dBm

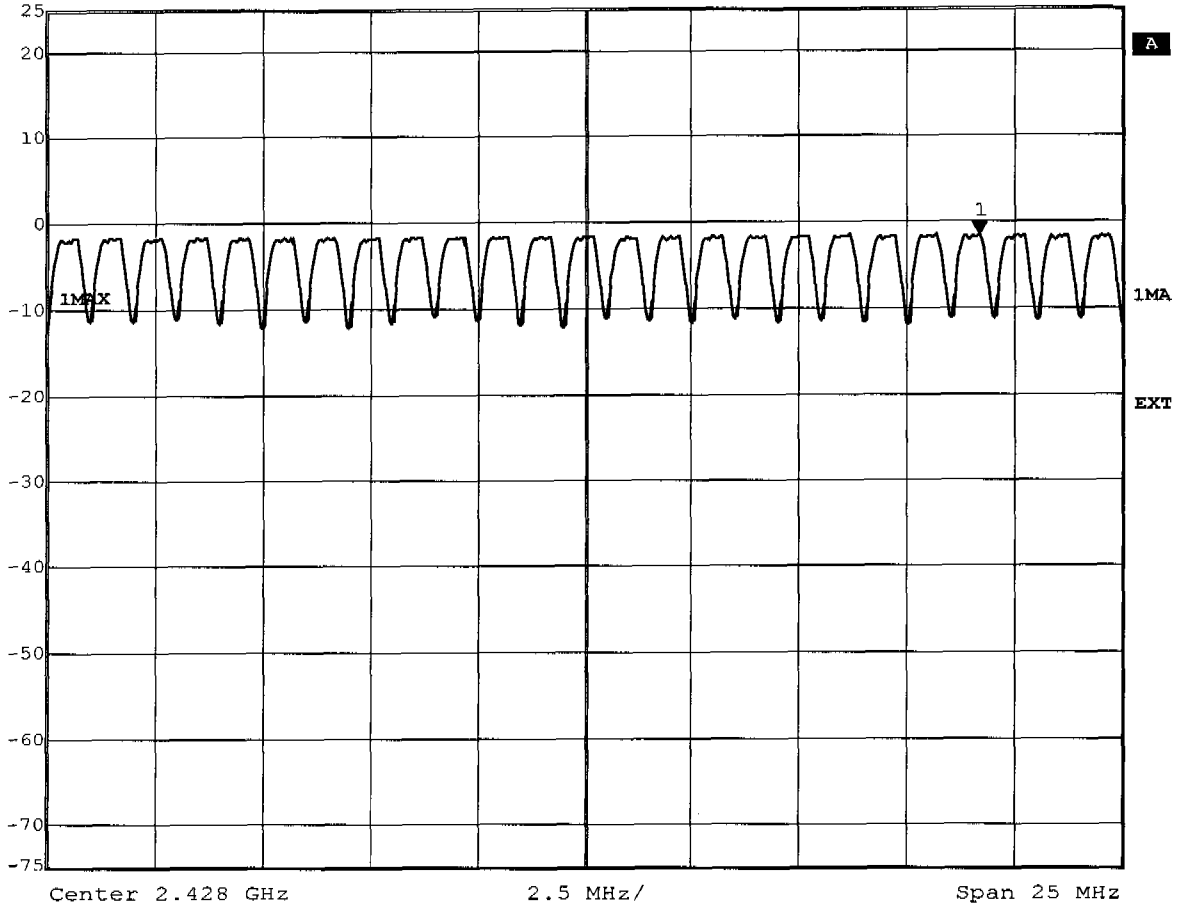

Title: Number of Hopping Frequencies Ch.: 14-38
Comment A: Siemens HHB-600
Date: 21.JAN.2004 15:19:20



Marker 1 [T1] RBW 300 kHz RF Att 50 dB
Ref Lvl -1.77 dBm VBW 300 kHz
25 dBm 2.44616132 GHz SWT 5 ms Unit dBm

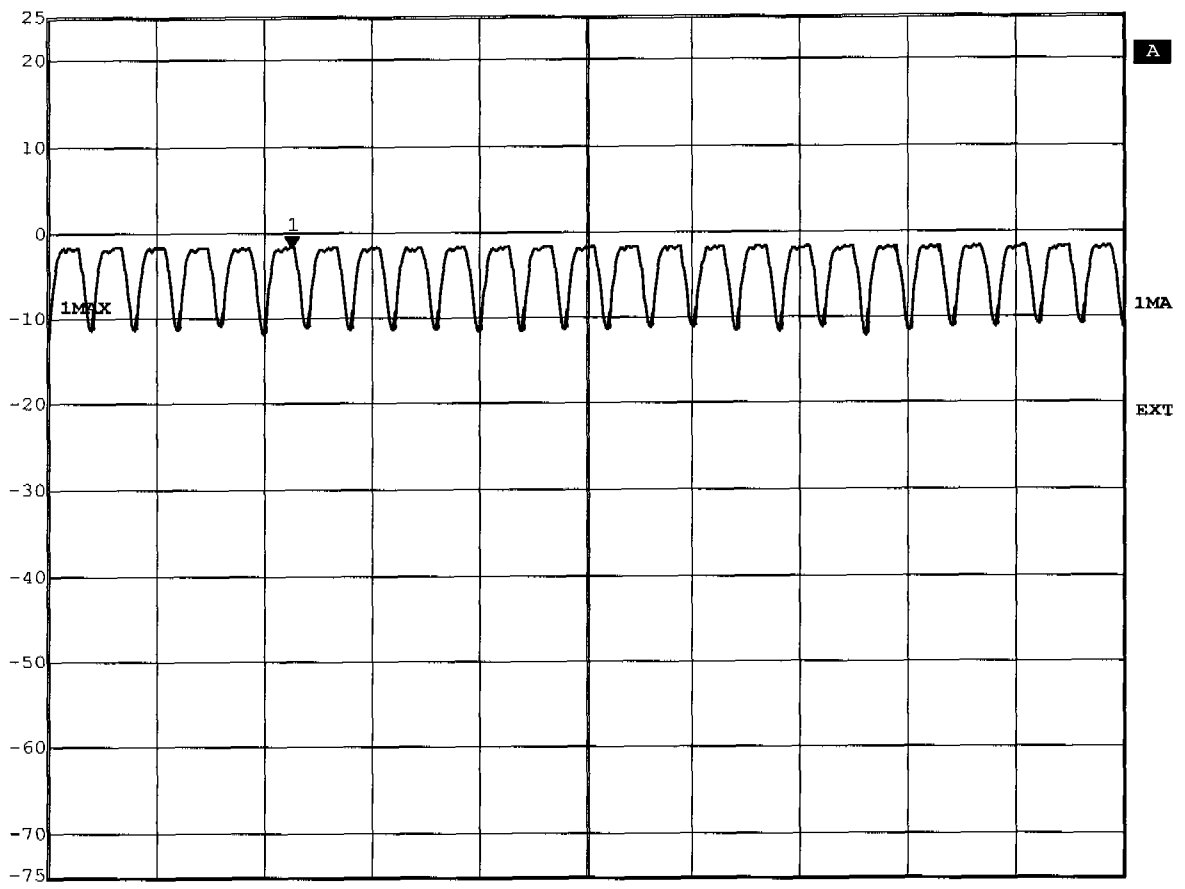


Title: Number of Hopping Frequencies Ch.: 39-63
Comment A: Siemens HHB-600
Date: 21.JAN.2004 15:26:01



Ref Lvl
25 dBm


RBW 300 kHz RF Att 50 dB
VBW 300 kHz
SWT 5 ms Unit dBm

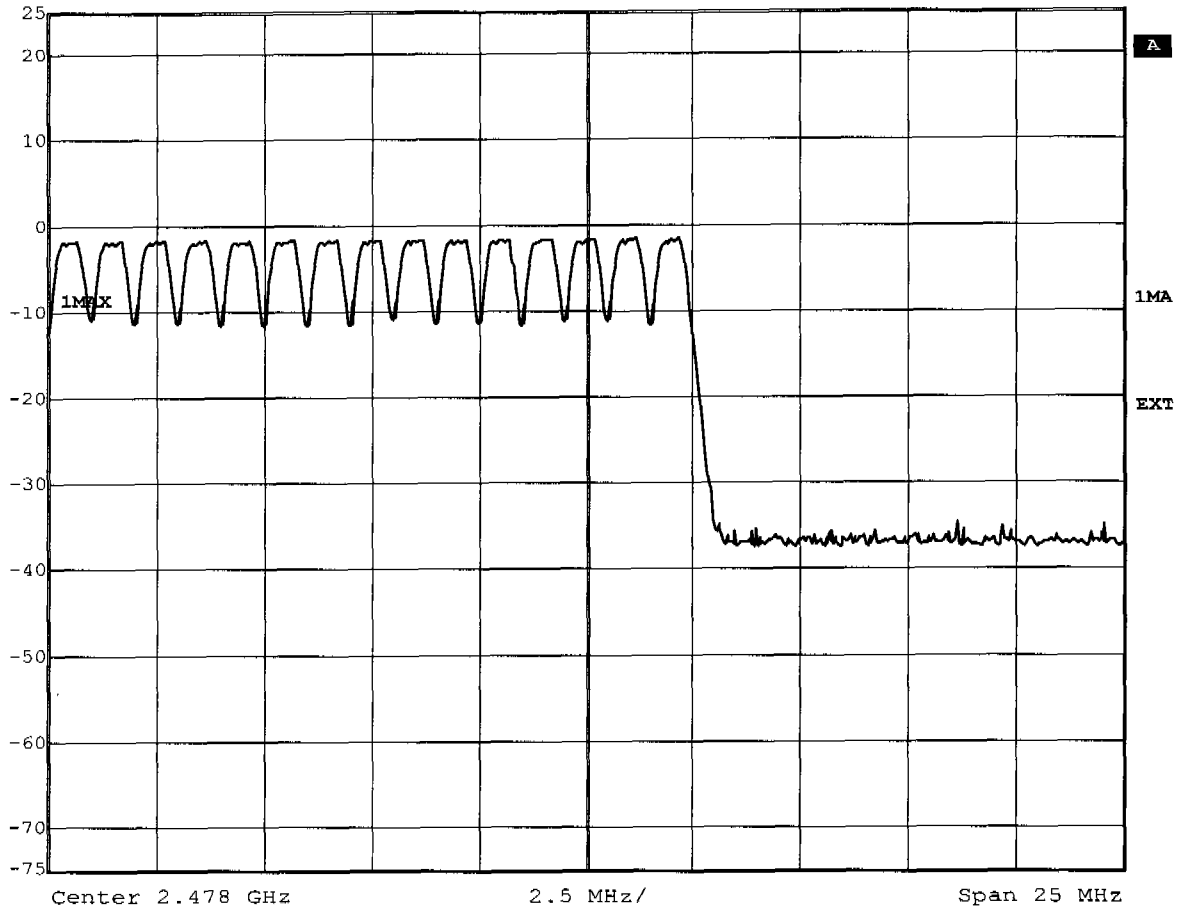

Title: Number of Hopping Frequencies Ch.: 64-78
Comment A: Siemens HHE-600
Date: 21.JAN.2004 15:30:25




Marker 1 [T1] RBW 300 kHz RF Att 50 dB
Ref Lvl -2.17 dBm VBW 300 kHz
25 dBm 2.41003908 GHz SWT 5 ms Unit dBm

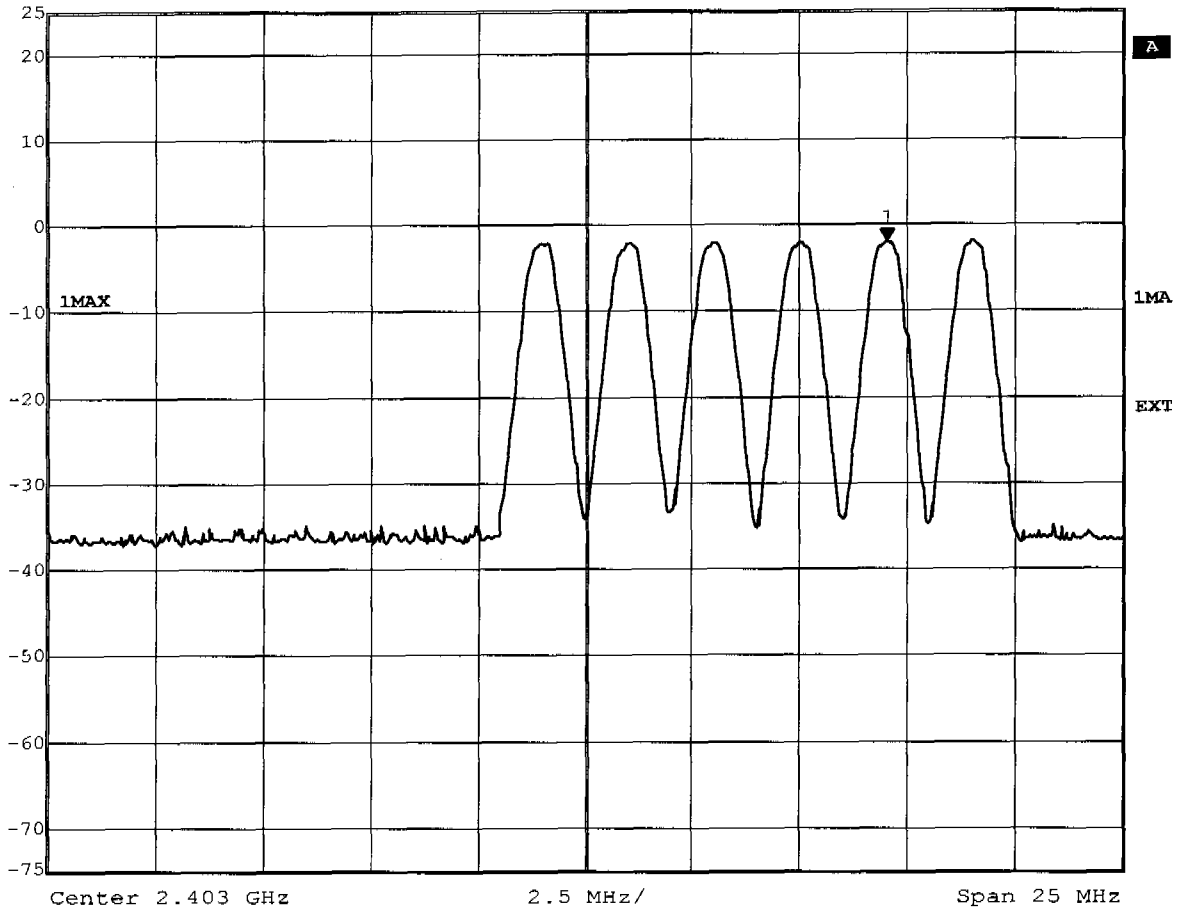

Title: Number of Hopping Frequencies (Master Inquiry Mode)
Comment A: Siemens HHE-600
Date: 21.JAN.2004 16:01:13



Marker 1 [T1] RBW 300 kHz RF Att 50 dB
Ref Lvl -2.03 dBm VBW 300 kHz
25 dBm 2.43498898 GHz SWT 5 ms Unit dBm

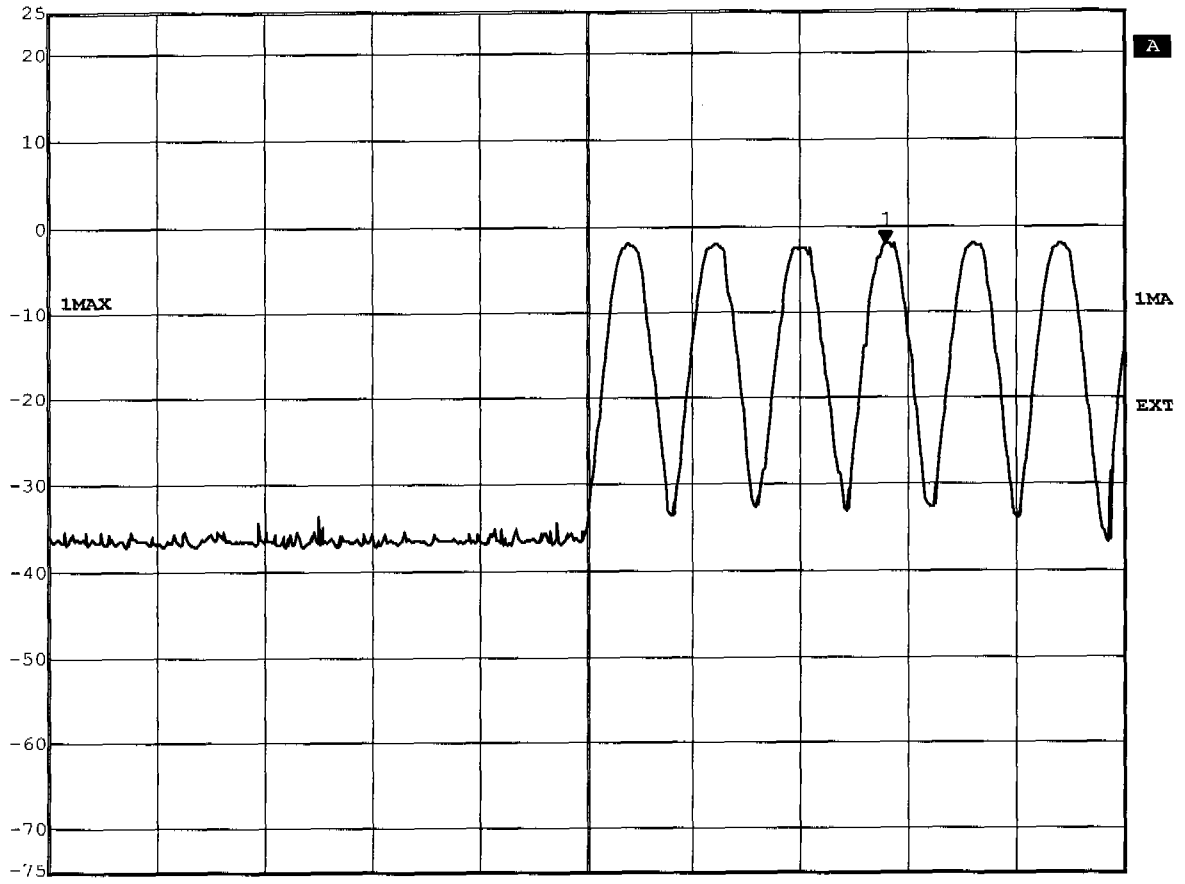


Center 2.428 GHz 2.5 MHz/ Span 25 MHz

Title: Number of Hopping Frequencies (Master Inquiry Mode)
Comment A: Siemens HHB-600
Date: 21.JAN.2004 16:04:28



Marker 1 [T1] RBW 300 kHz RF Att 50 dB
Ref Lvl -2.00 dBm VBW 300 kHz
25 dBm 2.44500902 GHz SWT 5 ms Unit dBm

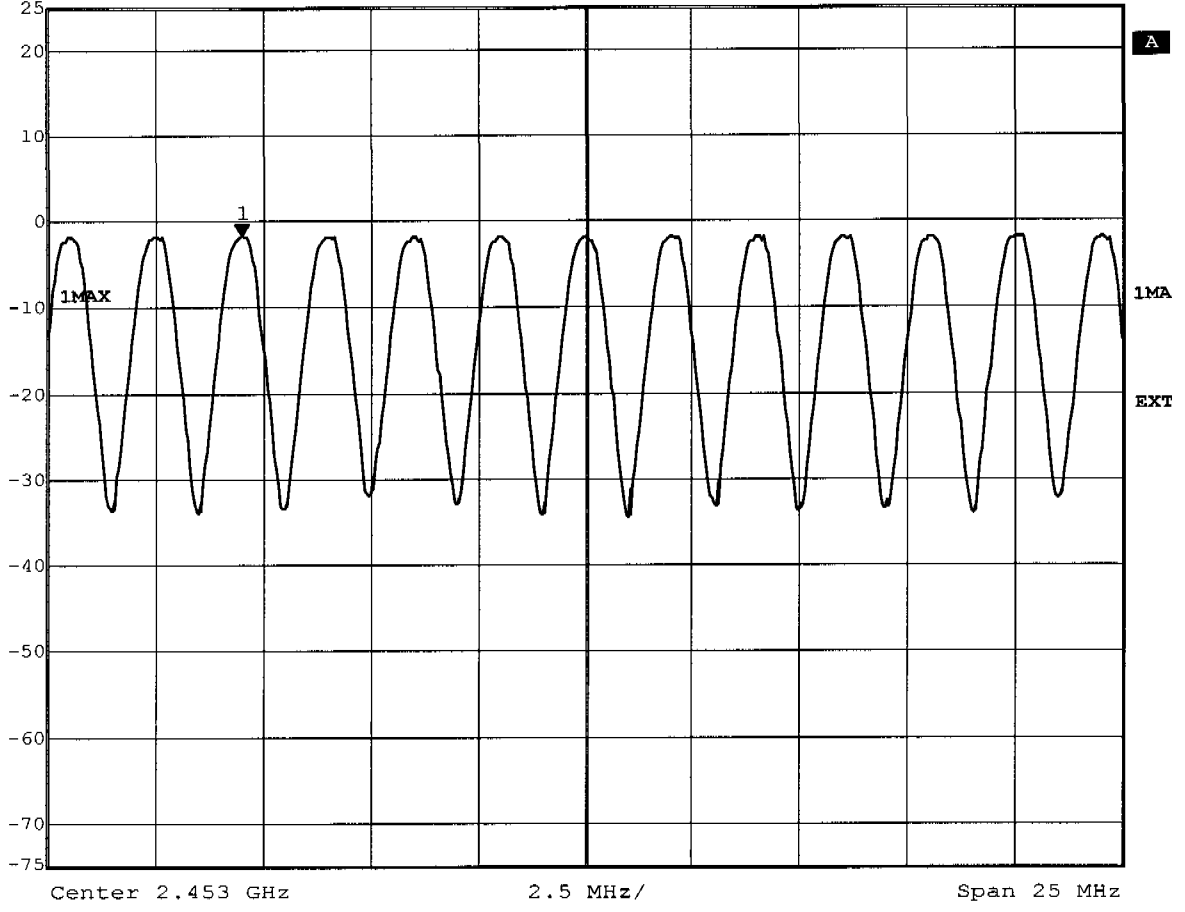


Title: Number of Hopping Frequencies (Master Inquiry Mode)
Comment A: Siemens HHB-600
Date: 21.JAN.2004 16:09:26



Ref Lvl
25 dBm

RBW 300 kHz RF Att 50 dB
VBW 300 kHz
SWT 5 ms Unit dBm

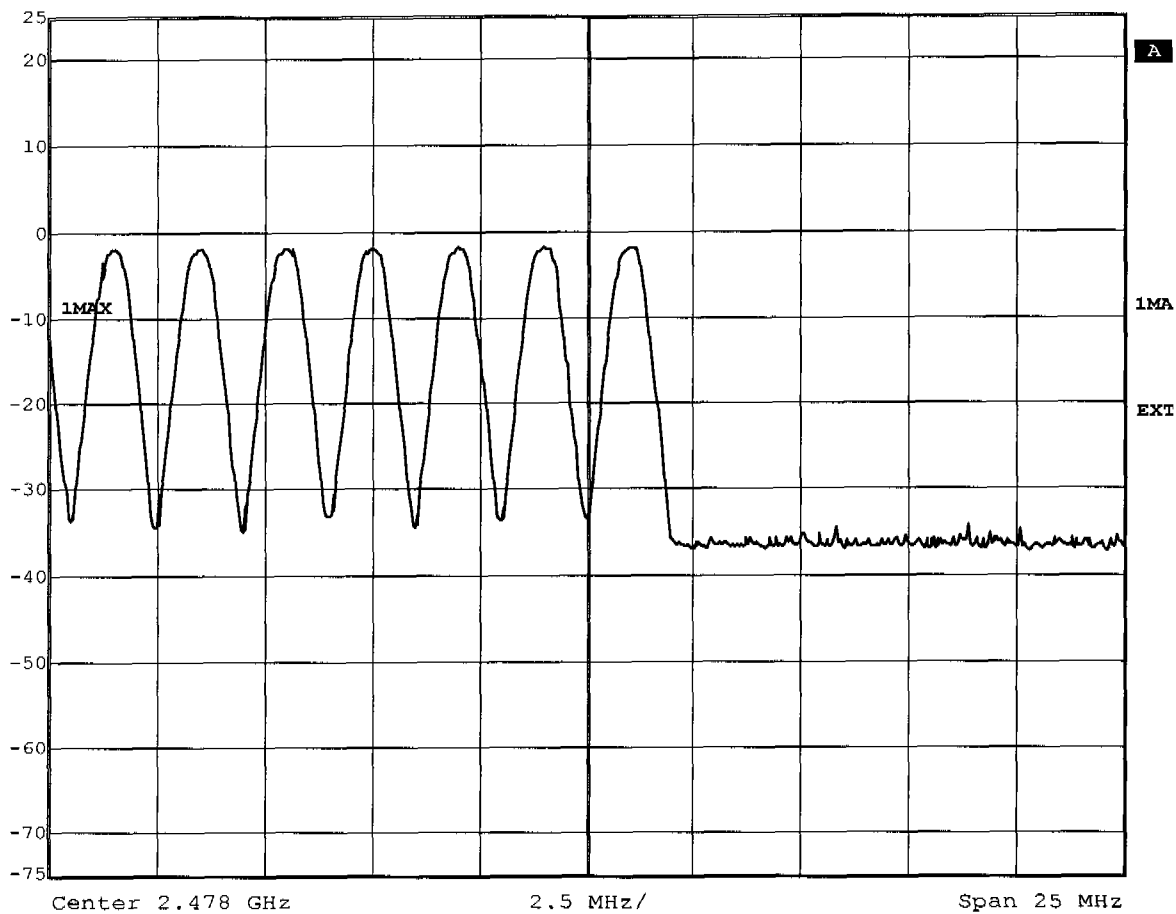

Title: Number of Hopping Frequencies (Master Inquiry Mode)
Comment A: Siemens HHB-600
Date: 21.JAN.2004 16:23:03




Appendix G

Time of Occupancy (Dwell Time)




Delta 1 [T1] RBW 1 MHz RF Att 20 dB
Ref Lvl 0.12 dB VBW 1 MHz
5 dBm 2.912689 ms SWT 5 ms Unit dBm

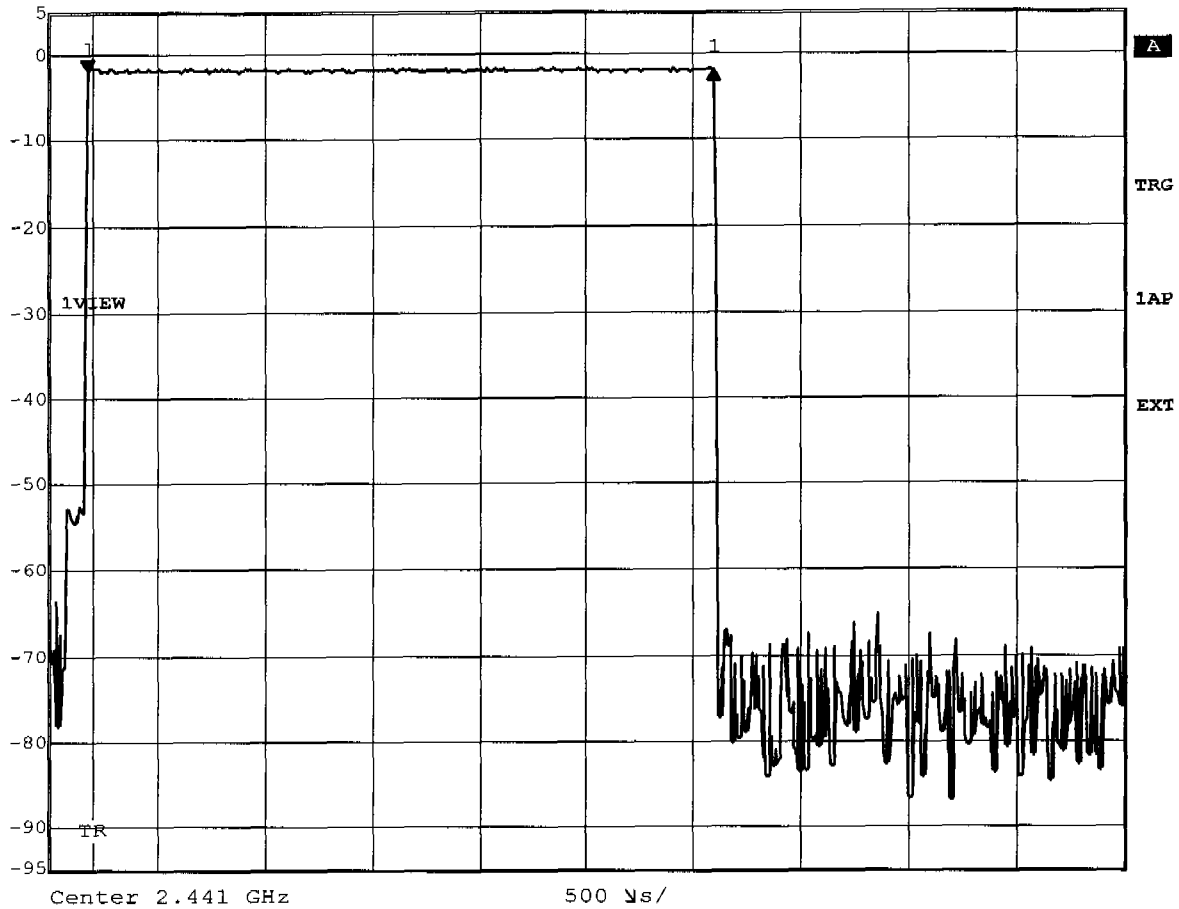

Title: Time of occupancy (Hopping DH5) 63 events * 2.913ms=183.5ms
Comment A: Siemens HHB-600
Date: 21.JAN.2004 17:19:46




Delta 1 [T1] RBW 1 MHz RF Att 30 dB
Ref Lvl -0.24 dB VBW 1 MHz
5 dBm 117.234469 μ s SWT 300 μ s Unit dBm

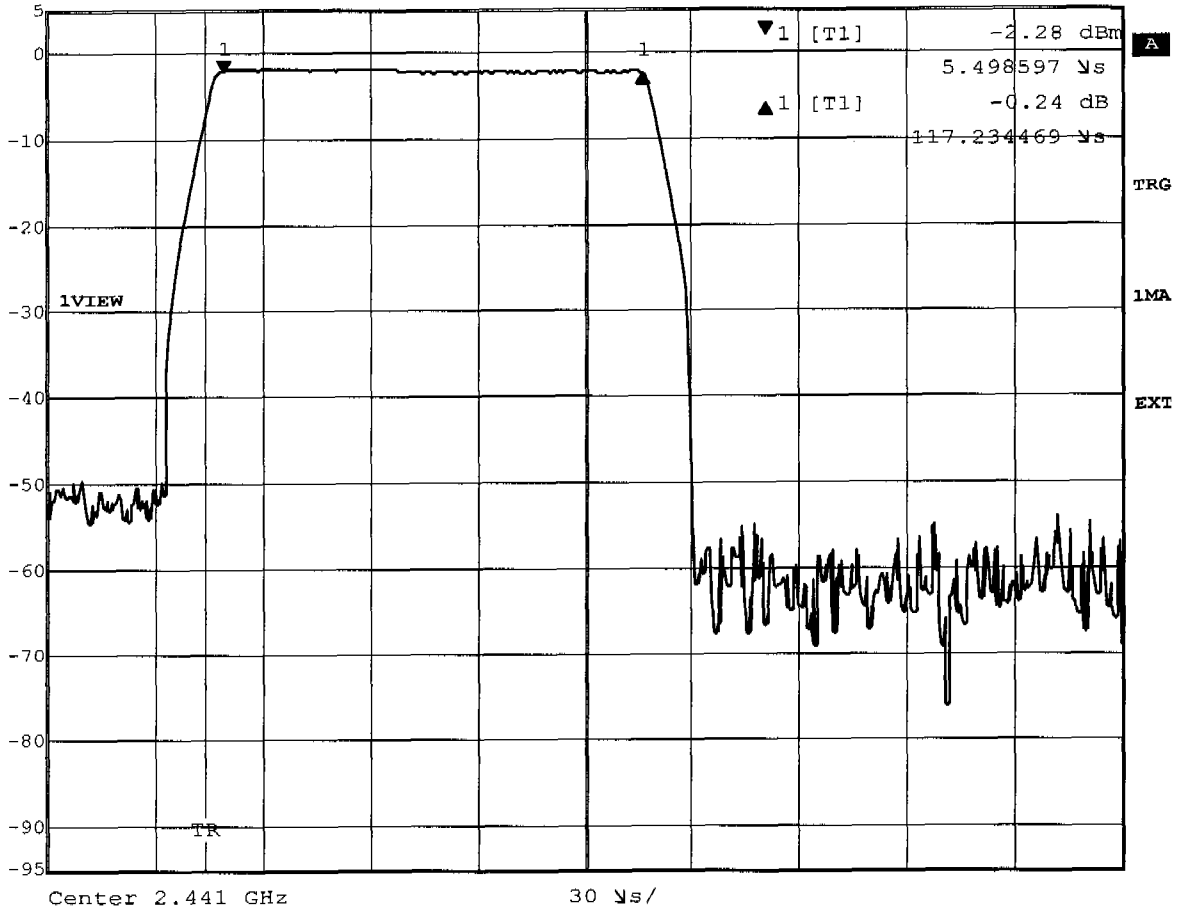

Title: Time of occupancy (Inquiry mode) 632 events * 0.117ms=73.9ms
Comment A: Siemens HHB-600
Date: 21.JAN.2004 17:13:53



Delta 2 [T1] RBW 1 MHz RF Att 50 dB
Ref Lvl -0.01 dB VBW 1 MHz
25 dBm 6.266333 ms SWT 11 ms Unit dBm

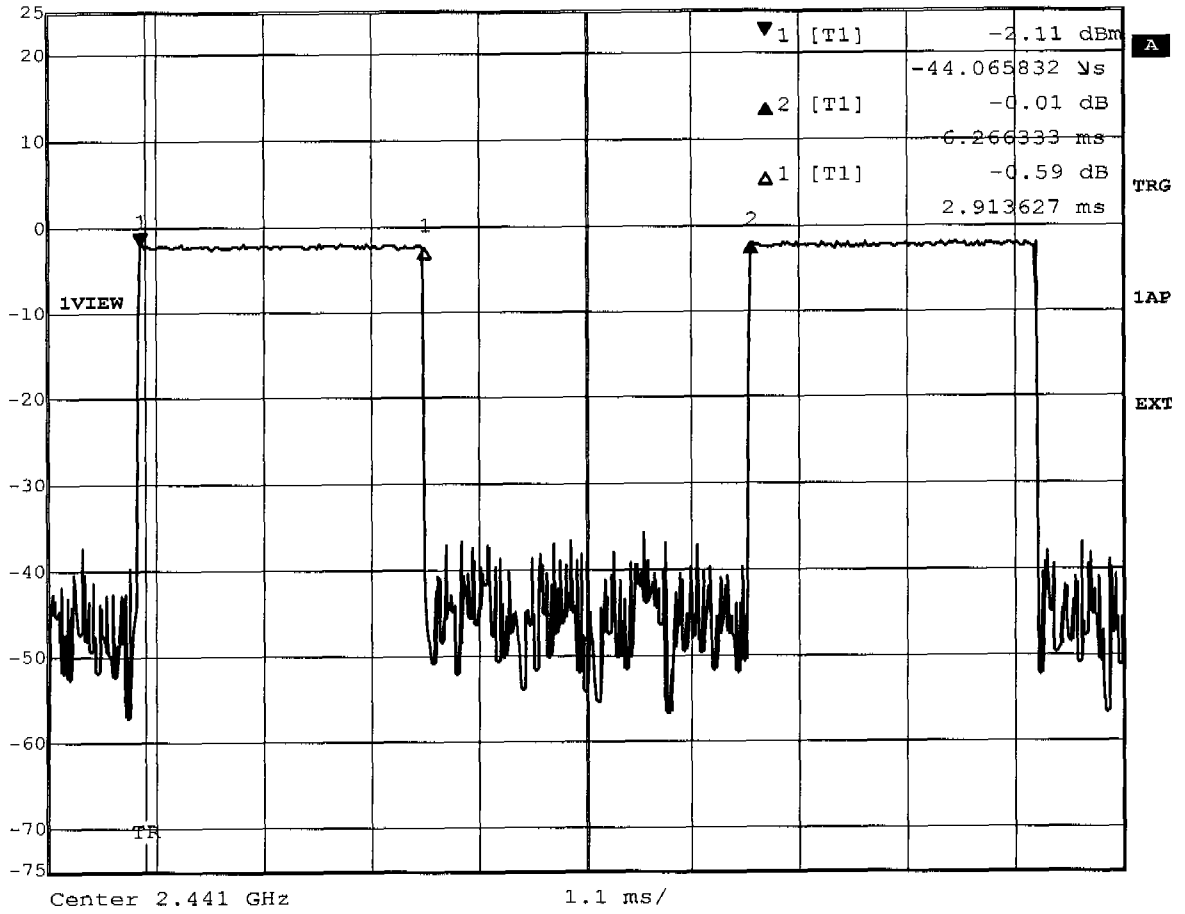

Title: Duty Cycle
Comment A: Siemens HHB-600
Date: 21.JAN.2004 13:31:38




Appendix H

20dB Bandwidth




Delta 1 [T1] RBW 10 kHz RF Att 50 dB
Ref Lvl 0.86 dB VBW 10 kHz
20 dBm 828.85771543 kHz SWT 56 ms Unit dBm

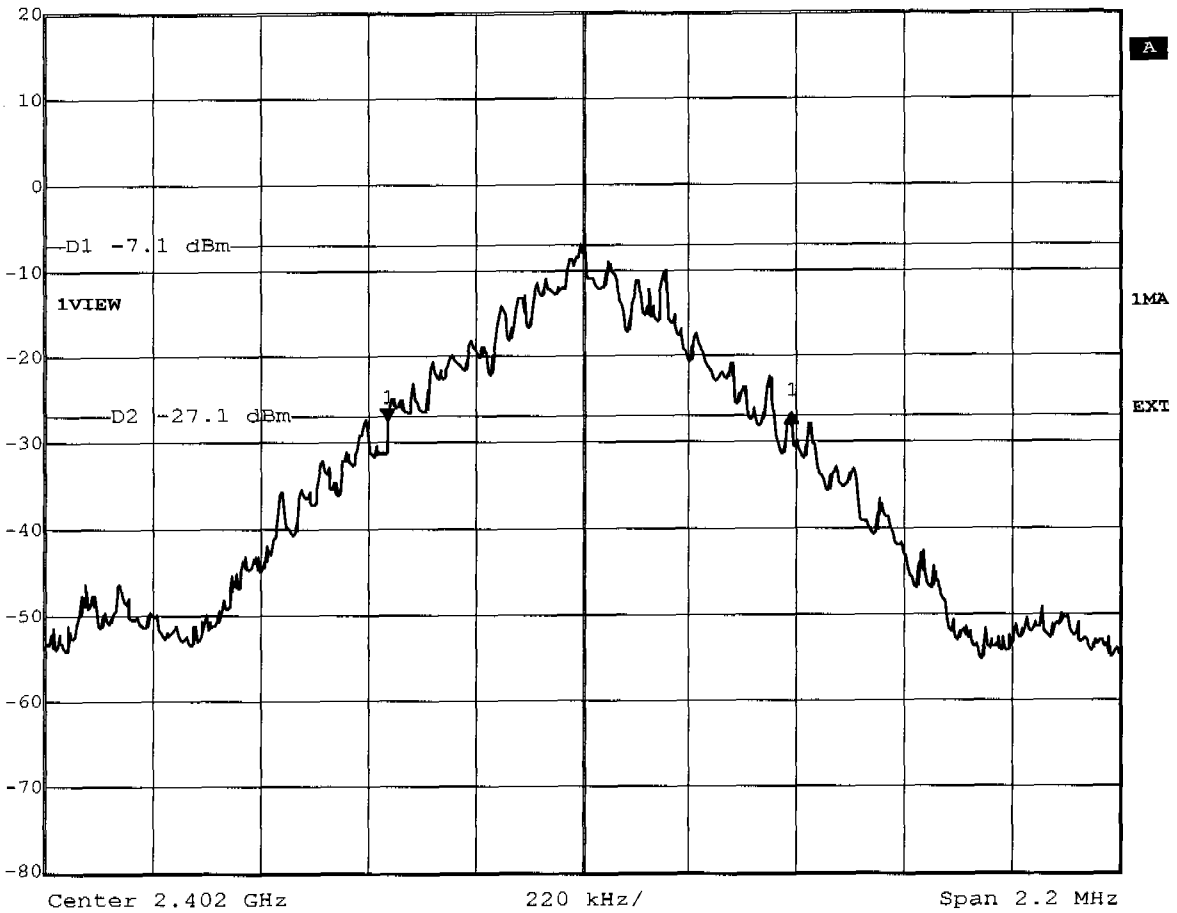

Title: -20dB Bandwidth Ch.: 0
Comment A: Siemens HHB-600
Date: 21.JAN.2004 11:31:35




Delta 1 [T1]	RBW	10 kHz	RF Att	50 dB
Ref Lvl	1.34 dB	VBW	10 kHz	
20 dBm	789.17835672 kHz	SWT	56 ms	Unit dBm

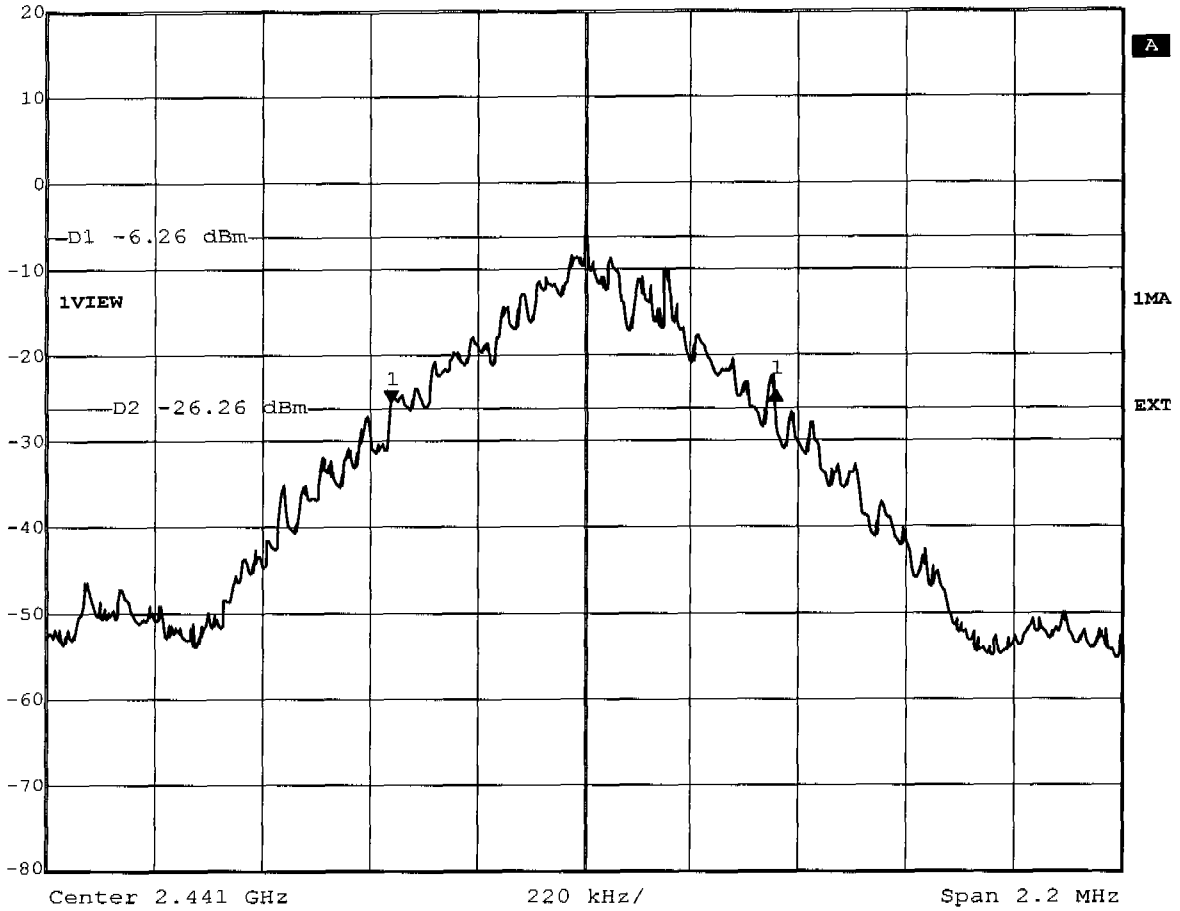

Title: -20dB Bandwidth Ch.: 39
Comment A: Siemens HHB-600
Date: 21.JAN.2004 11:29:58



Delta 1 [T1]	RBW	10 kHz	RF Att	50 dB
Ref Lvl	0.78 dB	VBW	10 kHz	
20 dBm	789.17835671 kHz	SWT	56 ms	Unit dBm

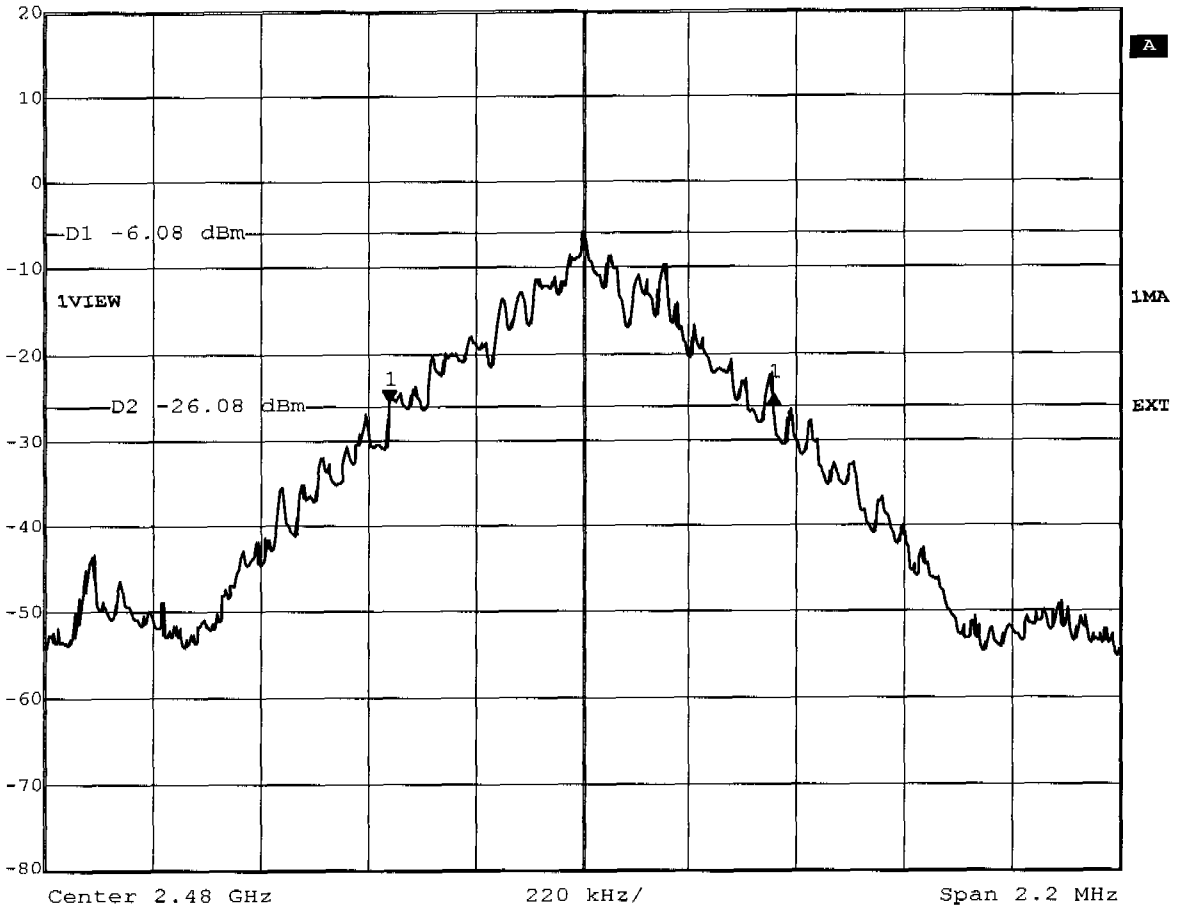

Title: -20dB Bandwidth Ch.: 78
Comment A: Siemens HHB-600
Date: 21.JAN.2004 11:34:50




Appendix I

Band-edge Compliance of RF Emissions




Marker 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl -36.23 dBm VBW 50 kHz
20 dBm 2.39913427 GHz SWT 5 ms Unit dBm

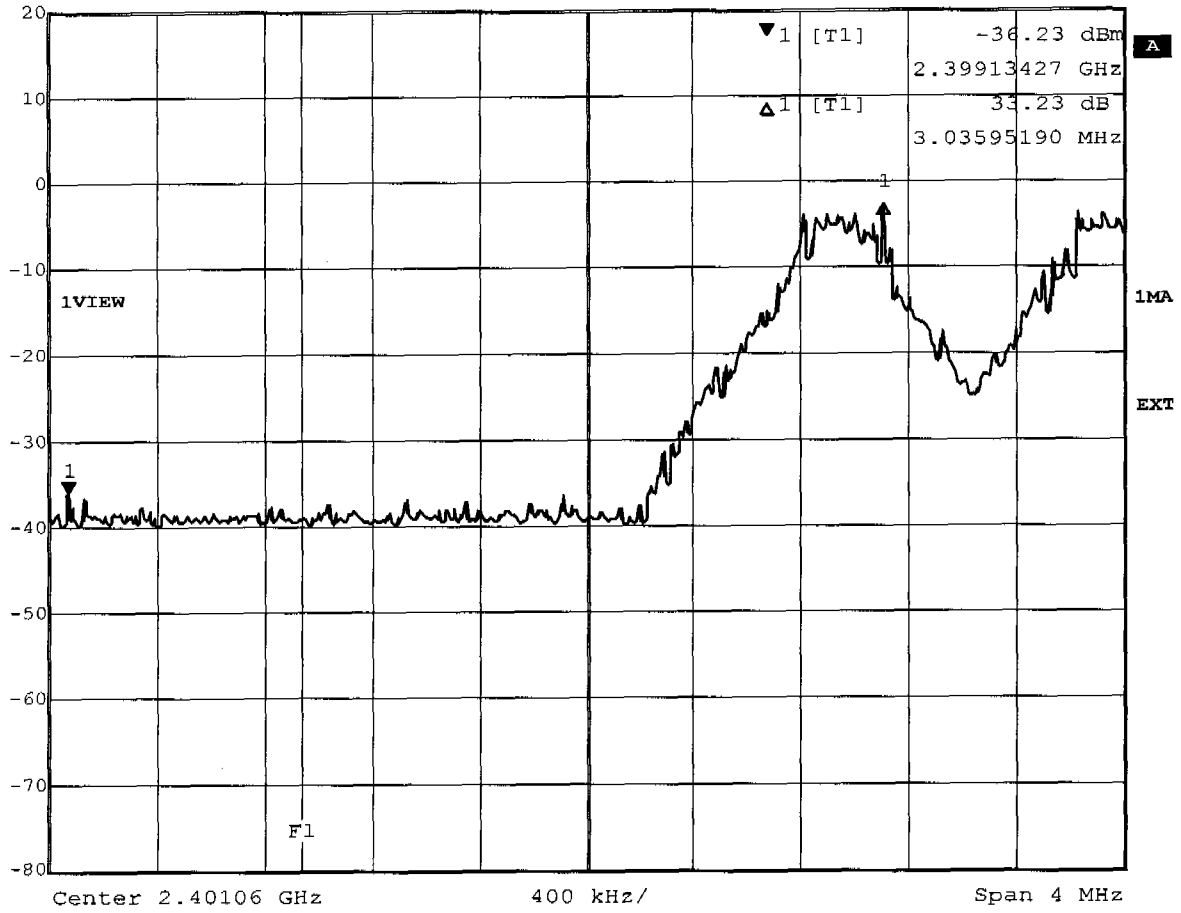

Title: Band-edge Compliance (conducted, hopping mode)
Comment A: Siemens HHB-600
Date: 21.JAN.2004 12:29:59




Marker 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl -37.96 dBm VBW 50 kHz
20 dBm 2.48376074 GHz SWT 5 ms Unit dBm

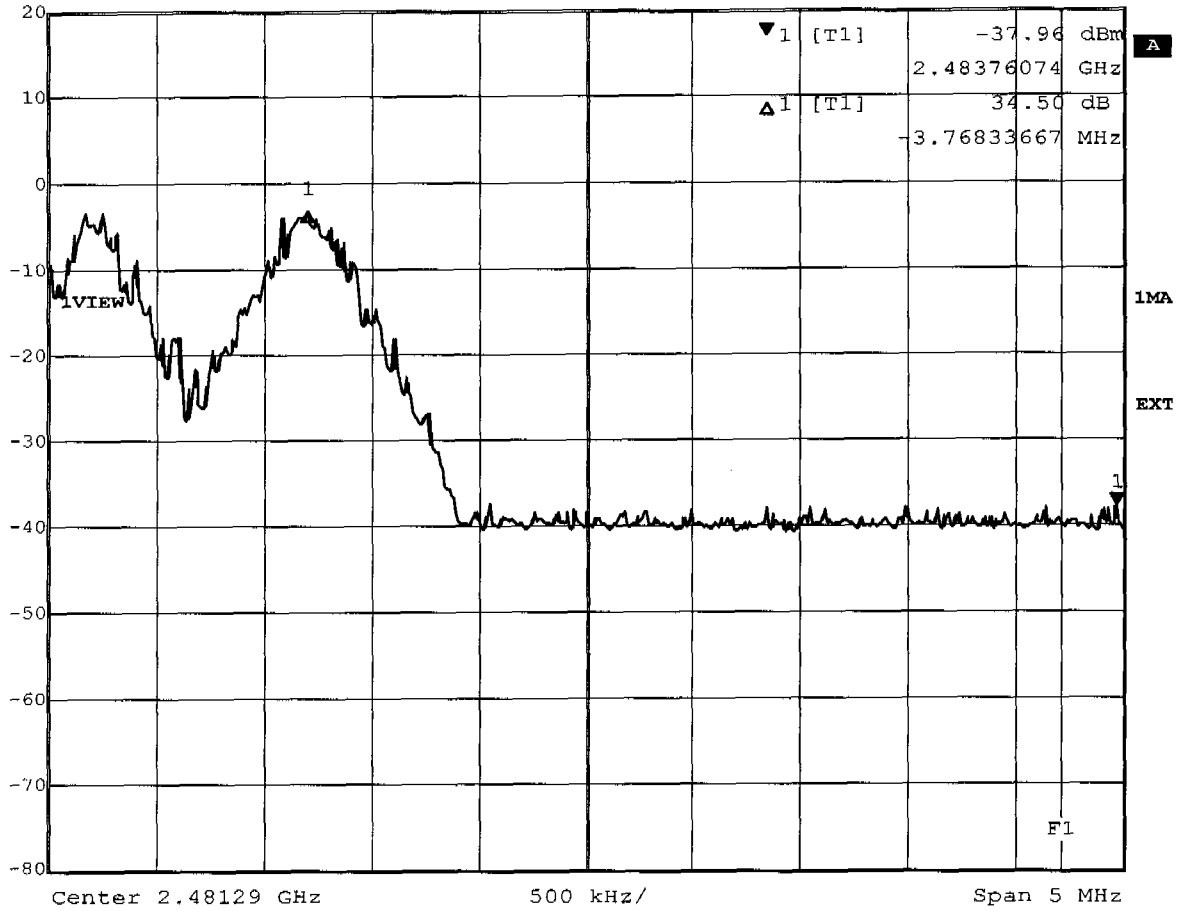

Title: Band-edge Compliance (conducted, hopping mode)
Comment A: Siemens HHB-600
Date: 21.JAN.2004 12:33:31




Delta 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl 35.83 dB VBW 50 kHz
20 dBm 2.00300601 MHz SWT 5 ms Unit dBm

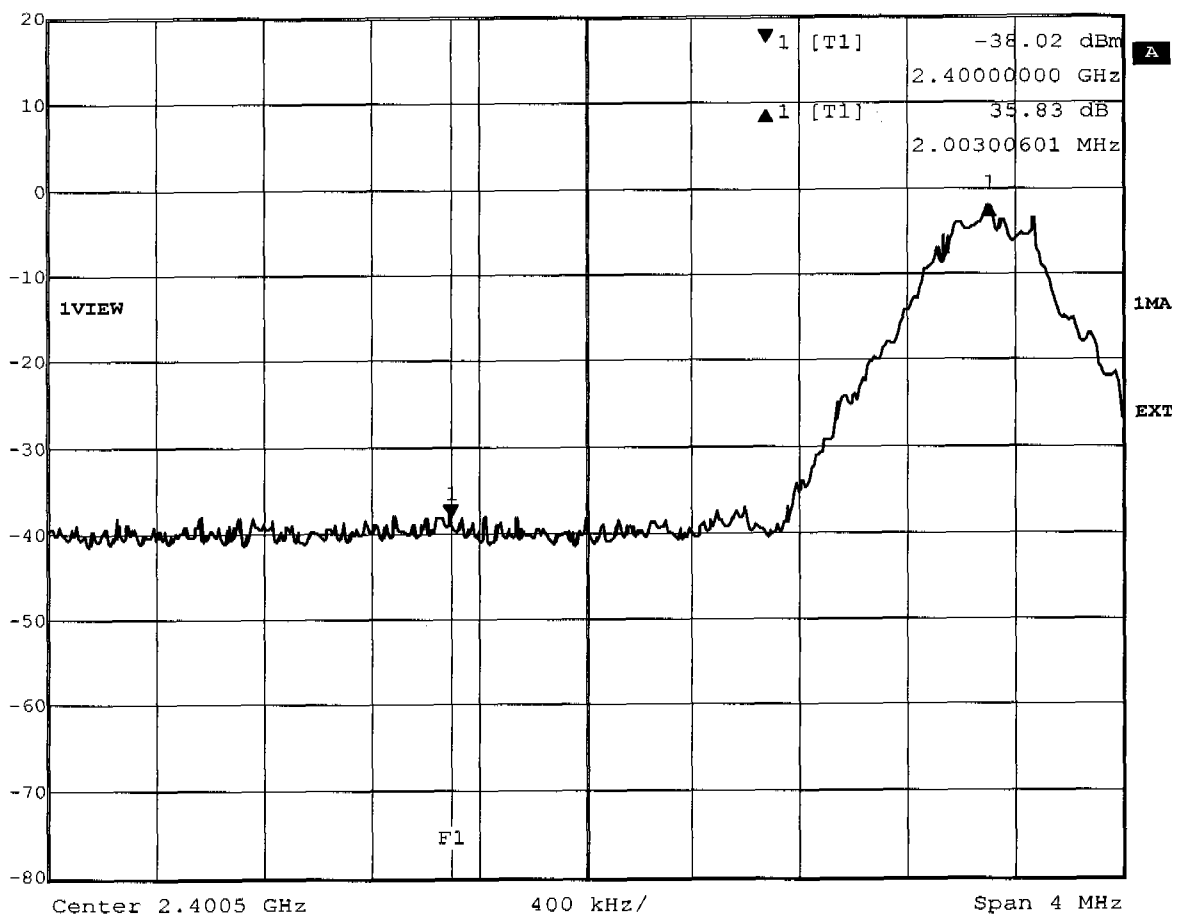

Title: Band-edge Compliance (conducted, single frequency)
Comment A: Siemens HHB-600
Date: 21.JAN.2004 11:48:25



Delta 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl 38.32 dB VBW 50 kHz
20 dBm -3.50729459 MHz SWT 5 ms Unit dBm

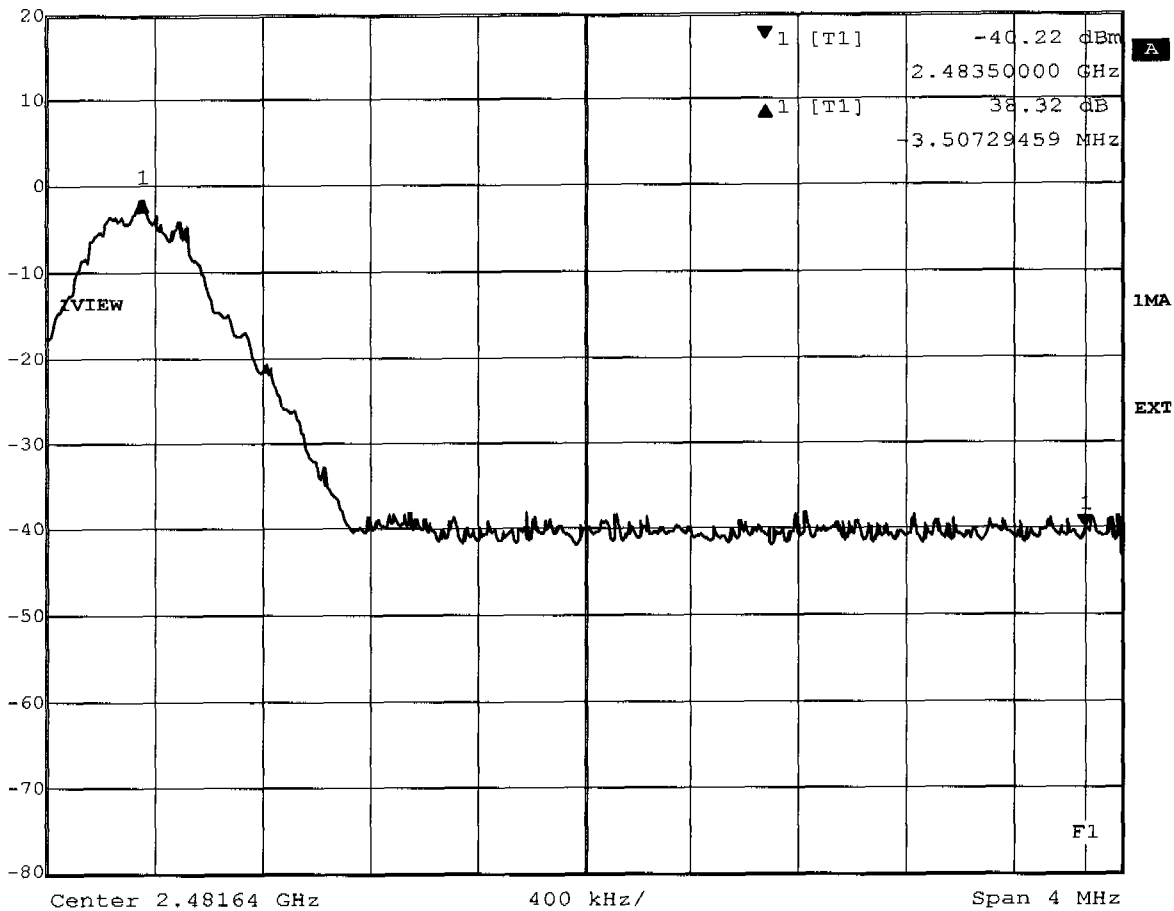

Title: Band-edge Compliance (conducted, single frequency)
Comment A: Siemens HHB-600
Date: 21.JAN.2004 11:46:46




Appendix J

Conducted Measurement at (AC) Power Line


EMI voltage test in the ac-mains according to FCC part 15

EUT: Bluetooth Headset Classic
 Approval Holder: Siemens AG
 Operating Condition: Unom: 115 VAC (AC/DC-adaptor), Tnom: 23°C
 Test Site: ETS
 Operator: Mr. Jahn
 Test Specification: V-Network: ESH2-Z5 (N)
 Comment: model: Siemens HHB-600 mode: speech-mode
 AC/DC-adaptor: ASTEC A5B00075161657

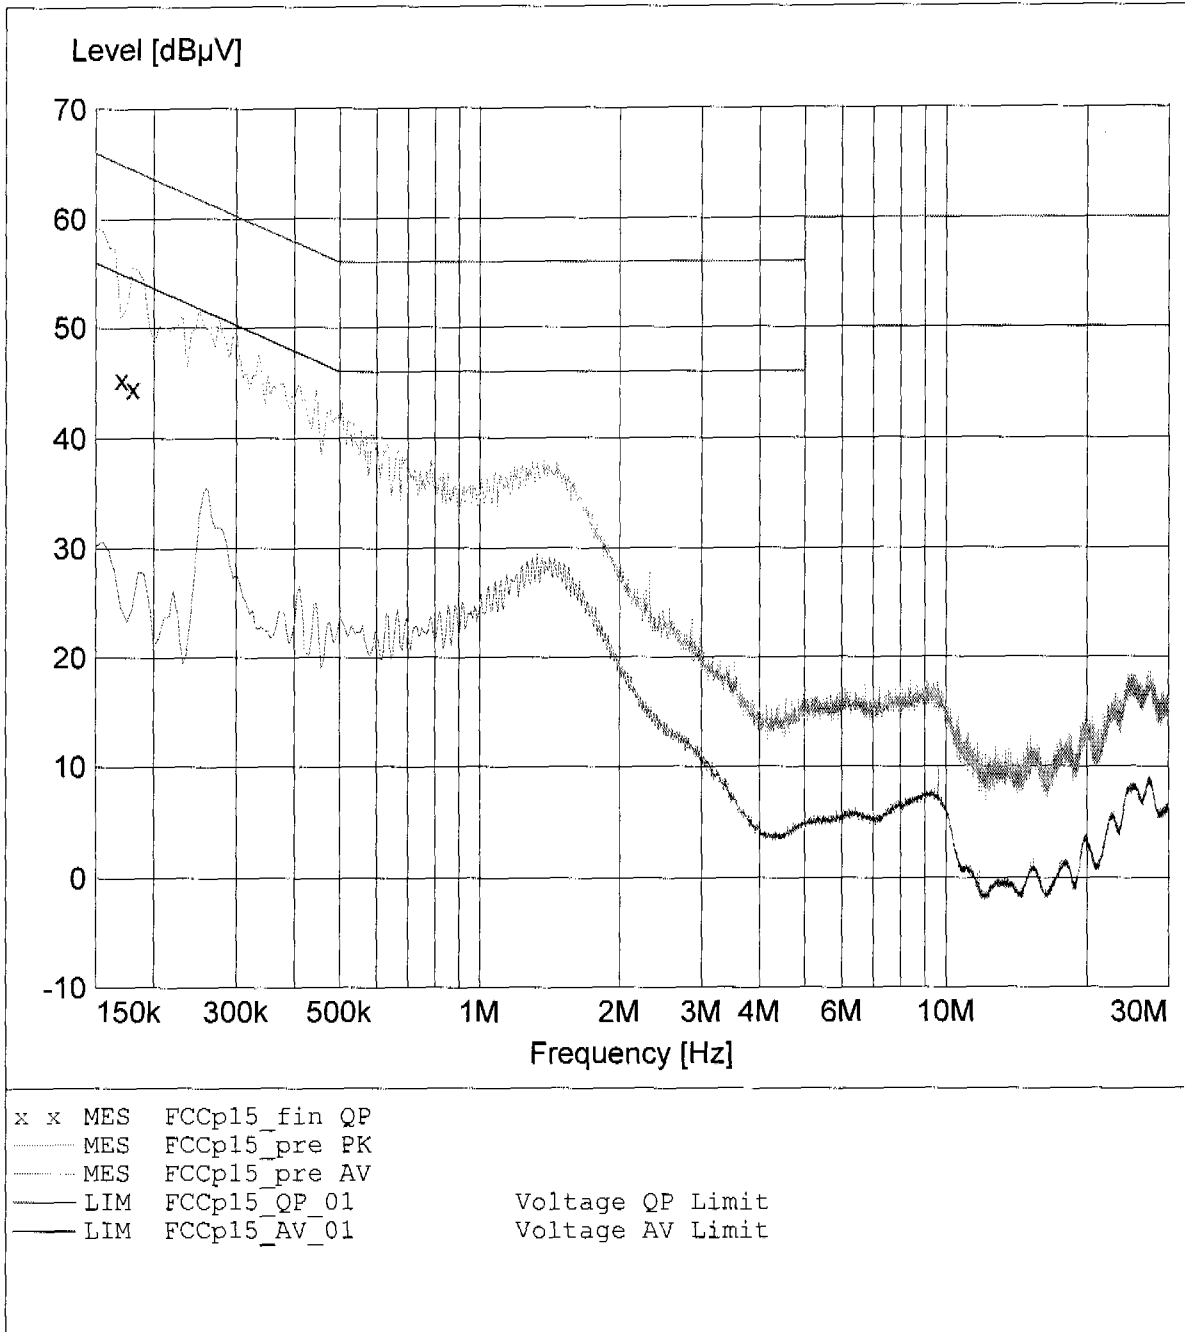


EMI voltage test in the ac-mains according to FCC part 15

EUT: Bluetooth Headset Classic
Approval Holder: Siemens AG
Operating Condition: Unom: 115 VAC (AC/DC-adaptor), Tnom: 23°C
Test Site: ETS
Operator: Mr. Jahn
Test Specification: V-Network: ESH2-Z5 (L1)
Comment: model: Siemens HHB-600 mode: speech-mode
AC/DC-adaptor: ASTEC A5B00075161657

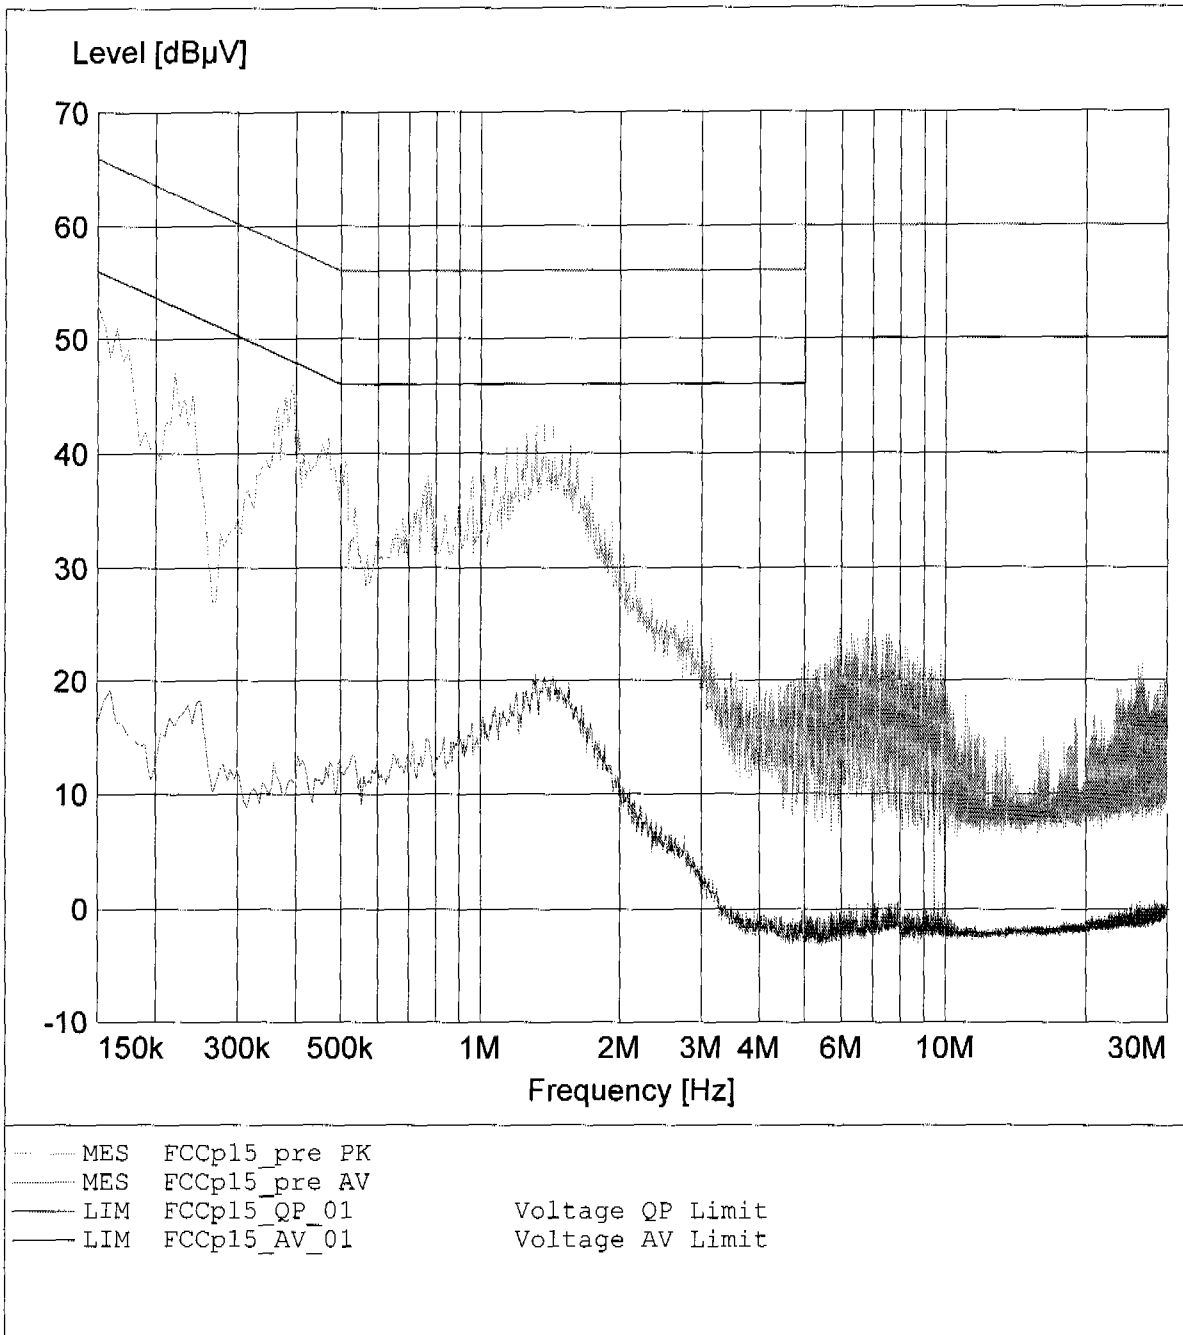


EMI voltage test in the ac-mains according to FCC part 15

EUT: Bluetooth Headset Classic
 Approval Holder: Siemens AG
 Operating Condition: Unom: 115 VAC (AC/DC-adaptor), Tnom: 23°C
 Test Site: ETS
 Operator: Mr. Jahn
 Test Specification: V-Network: ESH2-Z5 (L1)
 Comment: model: Siemens HHB-600 mode: charge-only-mode
 AC/DC-adaptor: ASTEC A5B00075161657

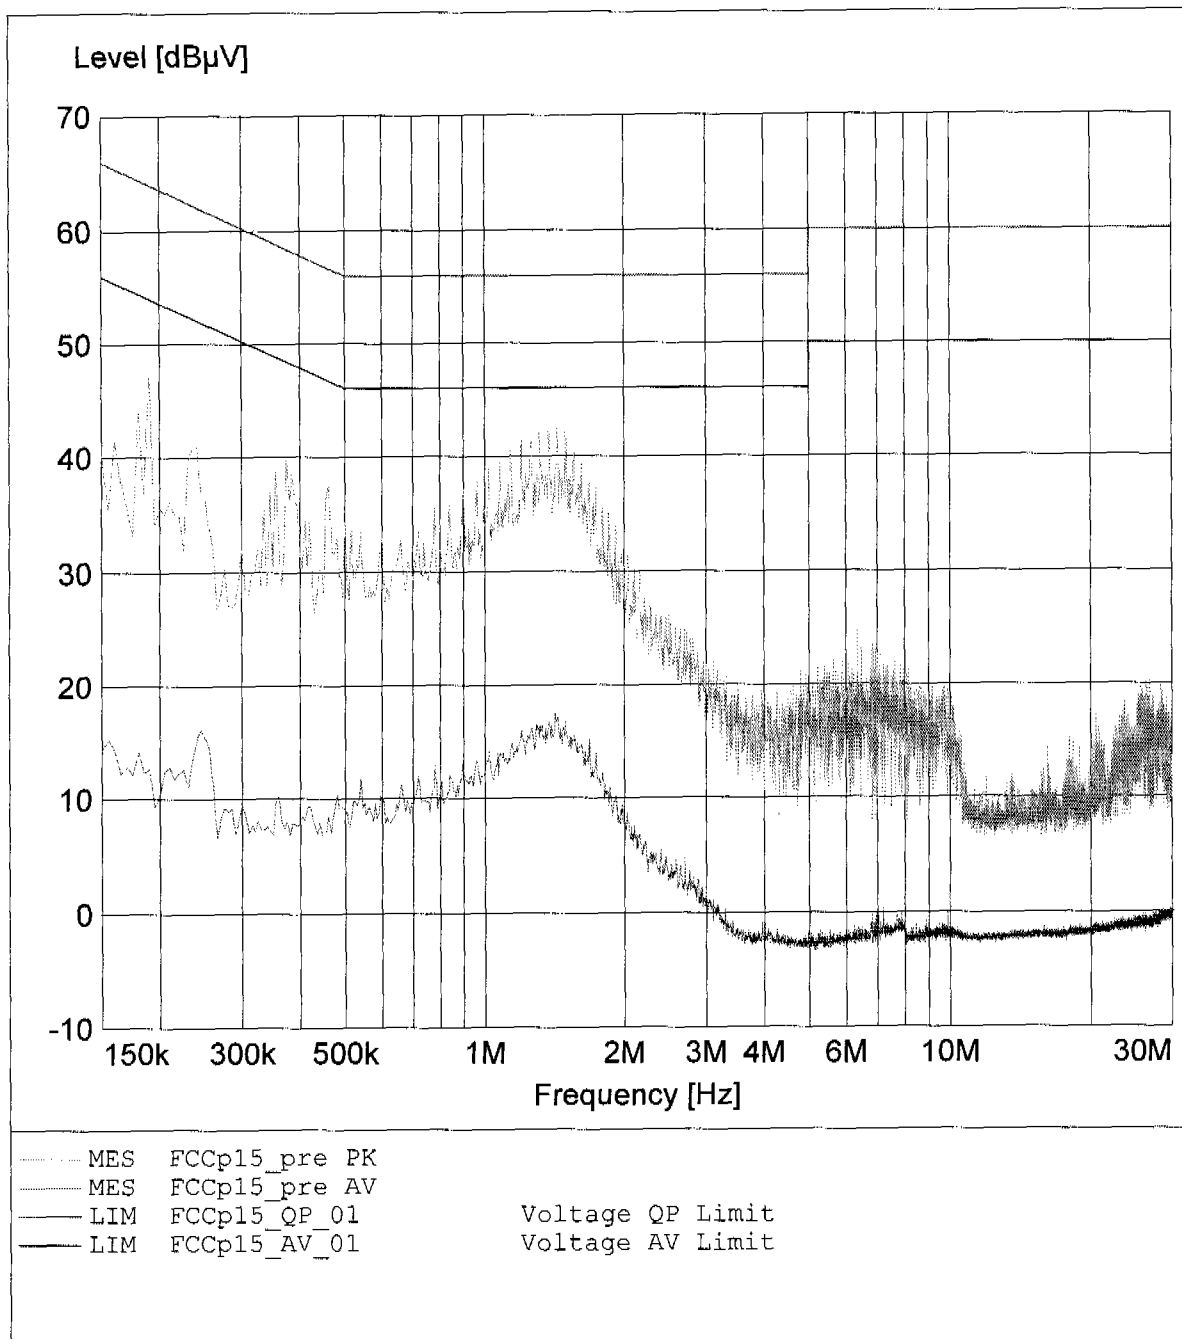


EMI voltage test in the ac-mains according to FCC part 15

EUT: Bluetooth Headset Classic
Approval Holder: Siemens AG
Operating Condition: Unom: 115 VAC (AC/DC-adaptor), Tnom: 23°C
Test Site: ETS
Operator: Mr. Jahn
Test Specification: V-Network: ESH2-Z5 (N)
Comment: model: Siemens HHB-600 mode: charge-only-mode
AC/DC-adaptor: ASTEC A5B00075161657

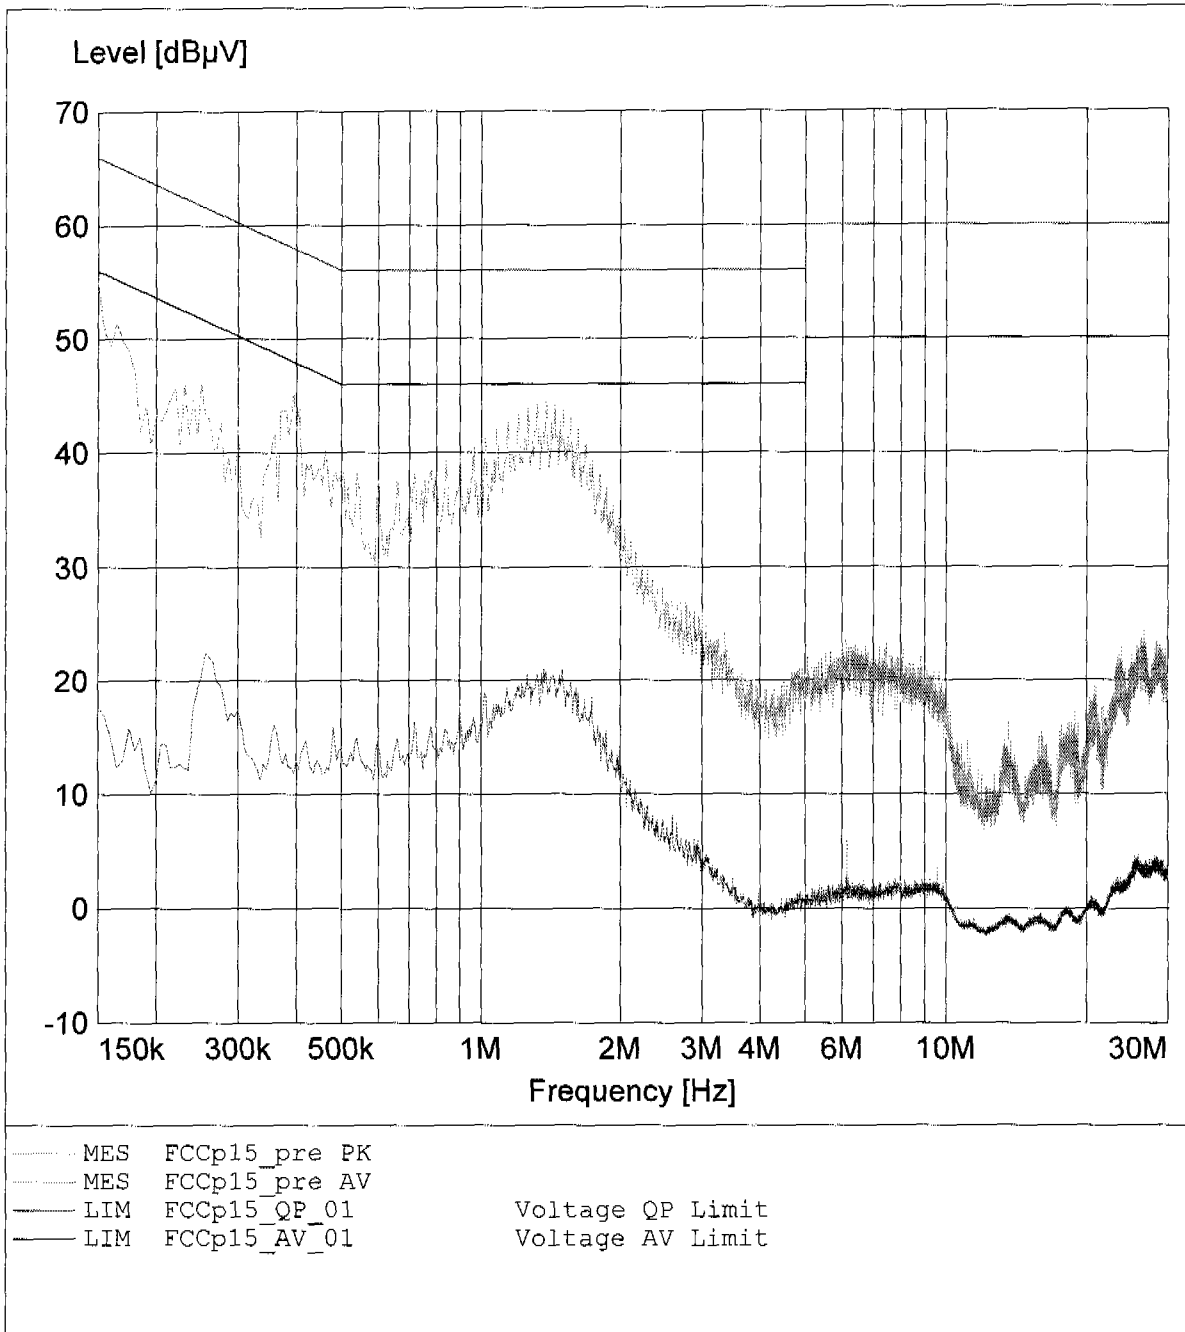

EMI voltage test in the ac-mains according to FCC part 15

EUT: Bluetooth Headset Classic
Approval Holder: Siemens AG
Operating Condition: Unom: 115 VAC (AC/DC-adaptor), Tnom: 23°C
Test Site: ETS
Operator: Mr. Jahn
Test Specification: V-Network: ESH2-Z5 (N)
Comment: model: Siemens HHB-600 mode: idle-mode
AC/DC-adaptor: ASTEC A5B00075161657

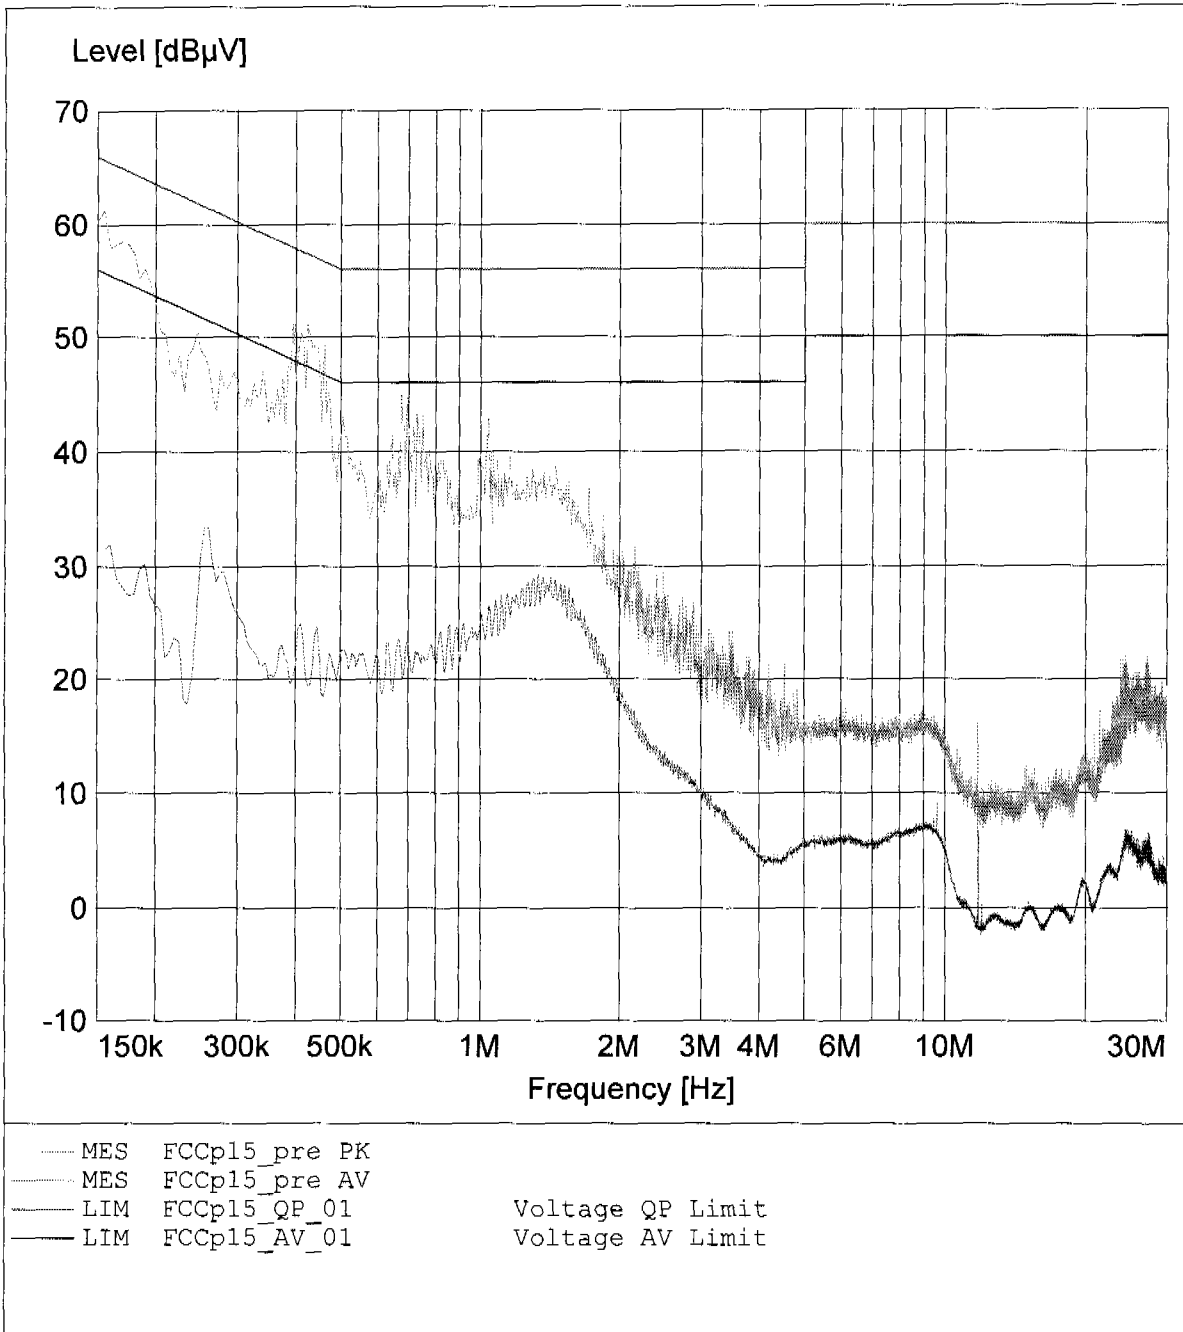

EMI voltage test in the ac-mains according to FCC part 15

EUT: Bluetooth Headset Classic
 Approval Holder: Siemens AG
 Operating Condition: Unom: 115 VAC (AC/DC-adaptor), Tnom: 23°C
 Test Site: ETS
 Operator: Mr. Jahn
 Test Specification: V-Network: ESH2-Z5 (L1)
 Comment: model: Siemens HHB-600 mode: idle-mode
 AC/DC-adaptor: ASTEC A5B00075161657

