


**Type approval Marks:**

- WEE mark 5mm high,
- CE mark 5mm high,
- Japanese mark 5mm high

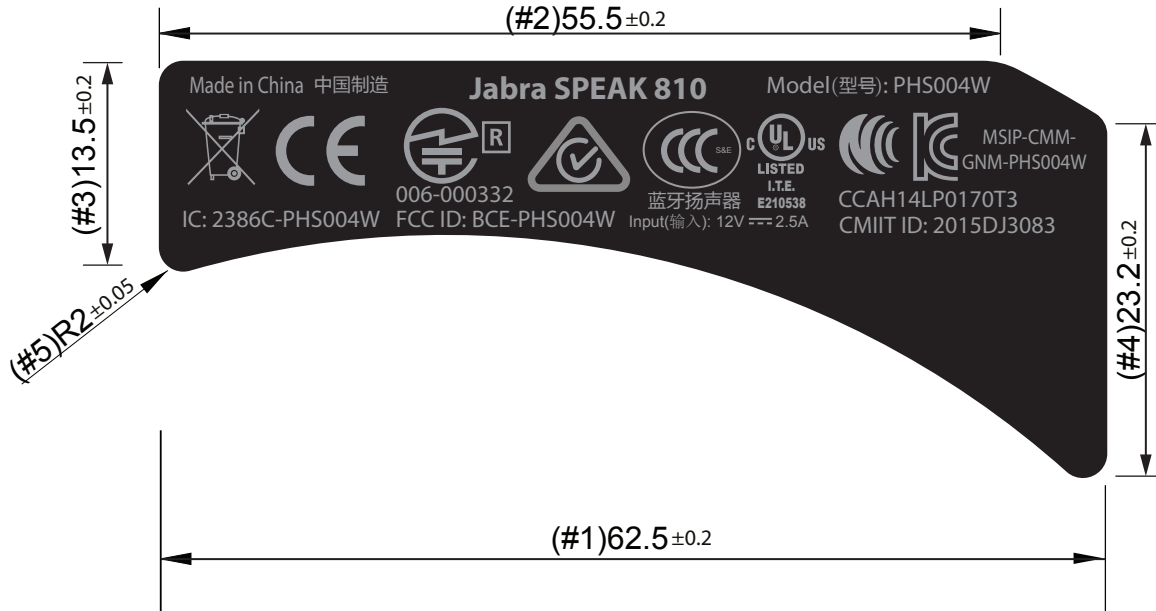

Label specification:

- Facestock: Polyester
- Rear side adhesive: Acrylic, permanent, to fit ABS plastic parts
- Surface: Matte
- Thickness: 0.1mm +/-0.05

Printed subjects:

- Always use layout file (1:1) as input
- Use CE marking (min 5mm high )as reference to ensure right size
- Printed symetric to centre axis
- Background: 0/0/0/100 (CMYK) - or 100% Black
- Printed items: grey, 5/0/0/45 (CMYK) - or PMS430C
- Finished label must be RoHS compliant
- Finished label must be UL PJDQ2 compliant. UL No:MH13600


**CONFIDENTIALITY NOTICE:**

This document is the property of GN Netcom A/S and must be treated as confidential. The document must not be used, or disclosed to any third party, without written permission by GN Netcom A/S. Copyright © 2010 GN Netcom A/S. All rights reserved.

Process control dimensions are marked:

IQC/OQC Characteristics for Evaluation:

#

Date of Change:	Description of Change:				Responsible: initials	
	Matr. Spec: (See B.O.M.)	Cosmetic Standard: GSC.ST.00002		Issued by:	Issued:	Drawing Scale: Size:
	Matr. type:	Part Marking.: GSC.PR.00102		ECAI	25.08.15	2:1 A4
	GN PDM file:	Object type: PART	Approved by:	Approved on:	Units:	Projection:
Description:			Document No:	Doc. Revision:	Design Status:	Page No:
Unit Label Spec., SPK 810			83-03492	D	Released	1 of 1

A

B

C

D

E

F