




Appendix B

RF power output conducted

FCC part 15.247

Peak output power conducted

EUT	Bluetooth office headset and base
Model	GN 5300hs
Approval Holder	GN Netcom
Temperature / Voltage	23°C / 3.7 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(b)
Comment 1	Peak output power
Comment 2	Channel.: 0 / 2402 MHz
Comment 3	

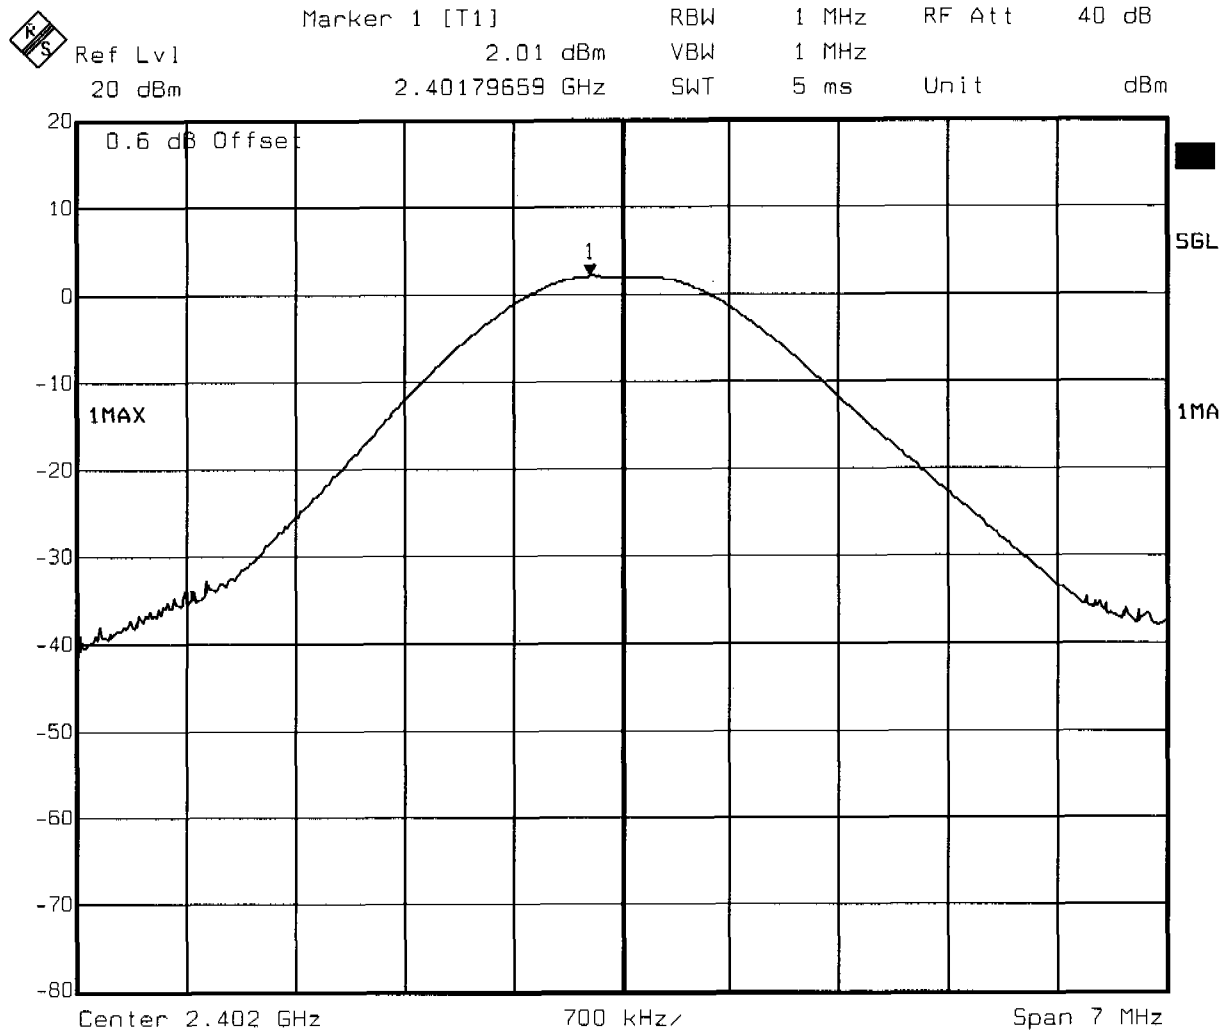

Date: 26.APR.2006 08:00:49

Measurement diagram




FCC part 15.247

Peak output power conducted

EUT	Bluetooth office headset and base
Model	GN 5300hs
Approval Holder	GN Netcom
Temperature / Voltage	23°C / 3.7 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(b)
Comment 1	Peak output power
Comment 2	Channel.: 39 / 2441 MHz
Comment 3	

	Ref Lvl	2.22 dBm	RBW	1 MHz	RF Att	40 dB
	20 dBm	2.44082465 GHz	VBW	1 MHz		
			SWT	5 ms	Unit	dBm

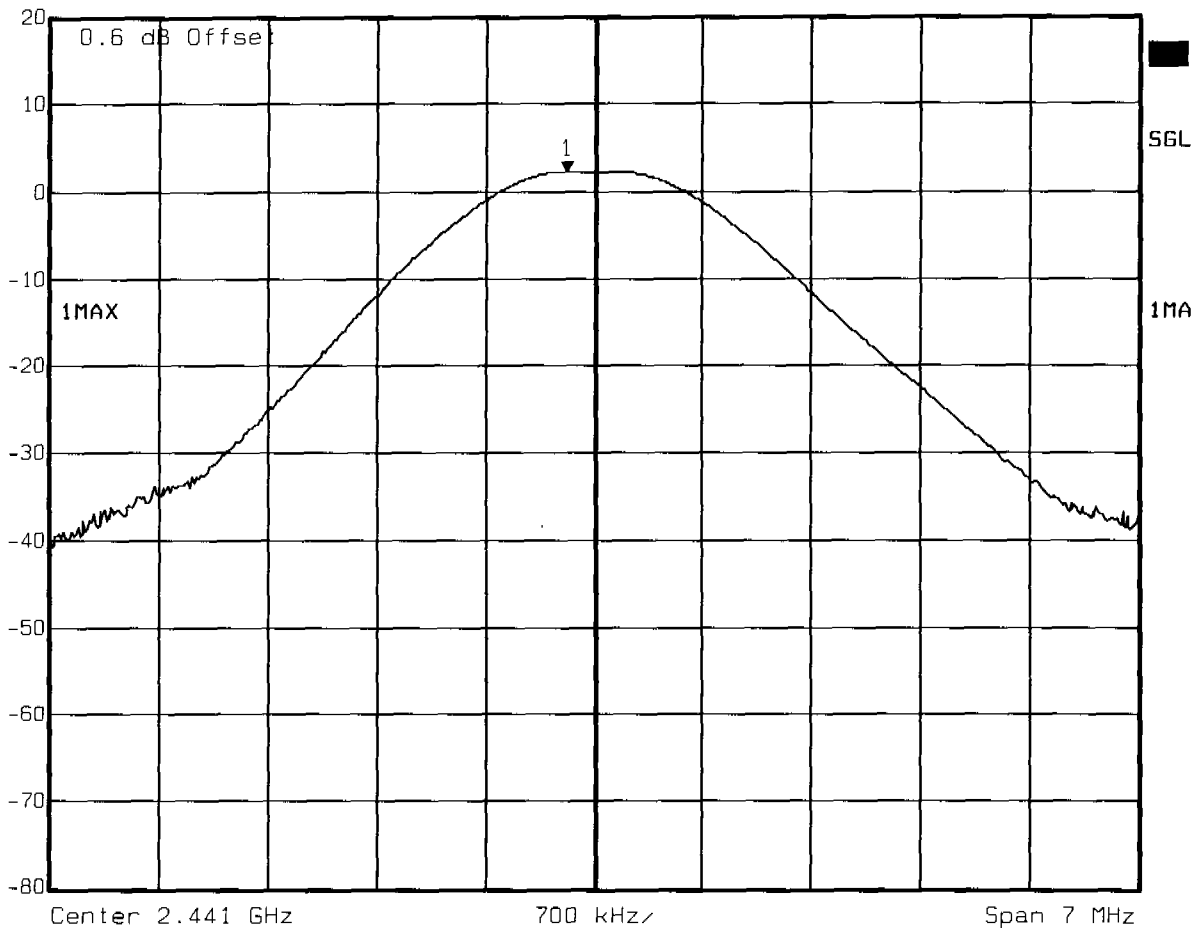


Date: 26.APR.2006 08:04:38

Measurement diagram

FCC part 15.247

Peak output power conducted

EUT	Bluetooth office headset and base
Model	GN 5300hs
Approval Holder	GN Netcom
Temperature / Voltage	23°C / 3.7 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(b)
Comment 1	Peak output_power
Comment 2	Channel.: 78 / 2480 MHz
Comment 3	

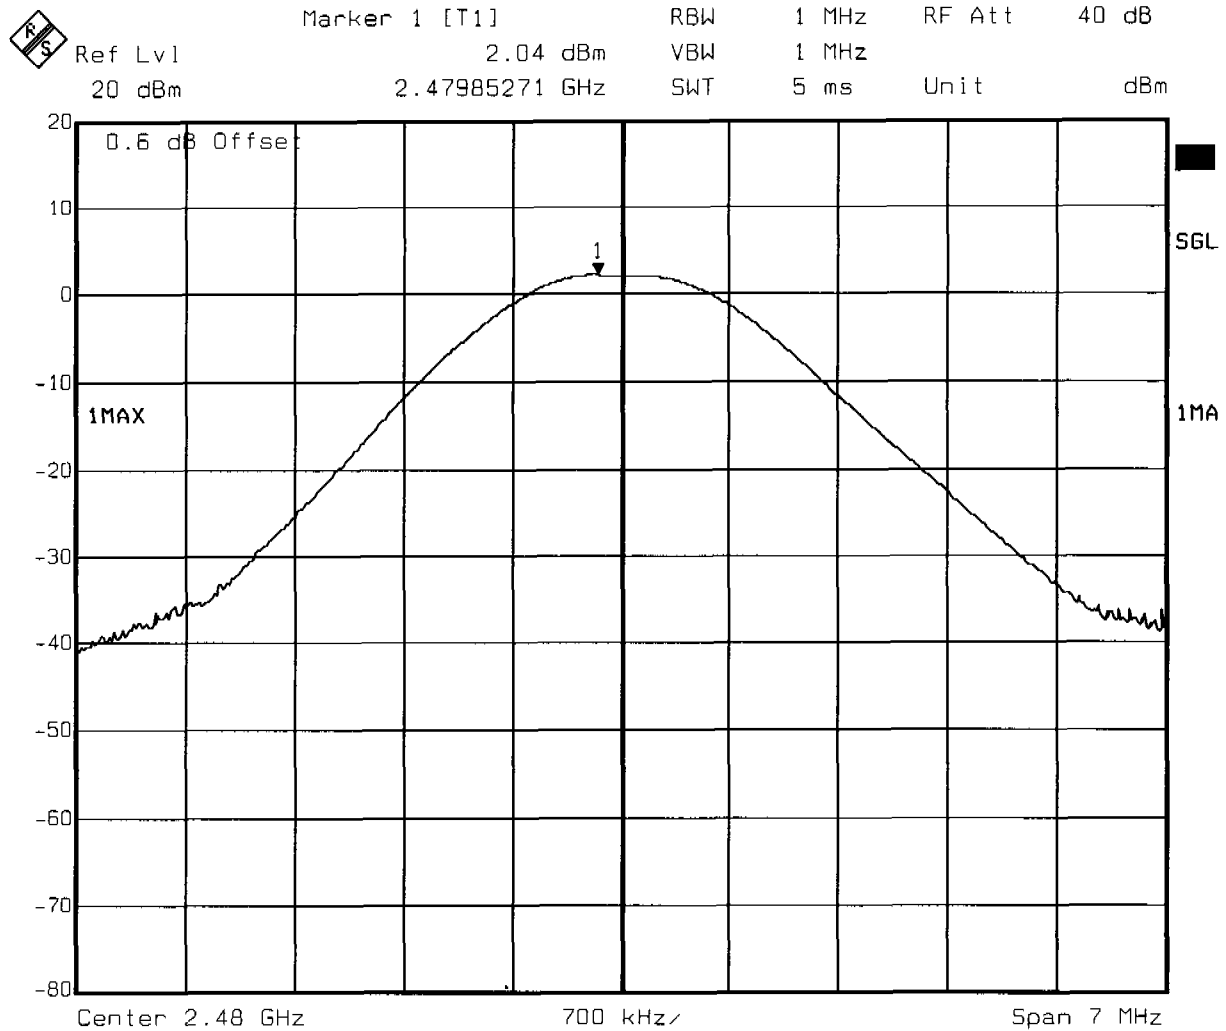

Date: 26.APR.2006 08:10:38

Measurement diagram



Appendix C

RF power output radiated (EIRP)




Appendix D

20 dB bandwidth



**FCC part 15.247
20 dB bandwidth**

EUT	Bluetooth office headset and base
Model	GN 5300hs
Approval Holder	GN Netcom
Temperature / Voltage	23°C / 3.7 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(a)
Comment 1	20 dB bandwidth
Comment 2	Channel.: 0 / 2402 MHz
Comment 3	

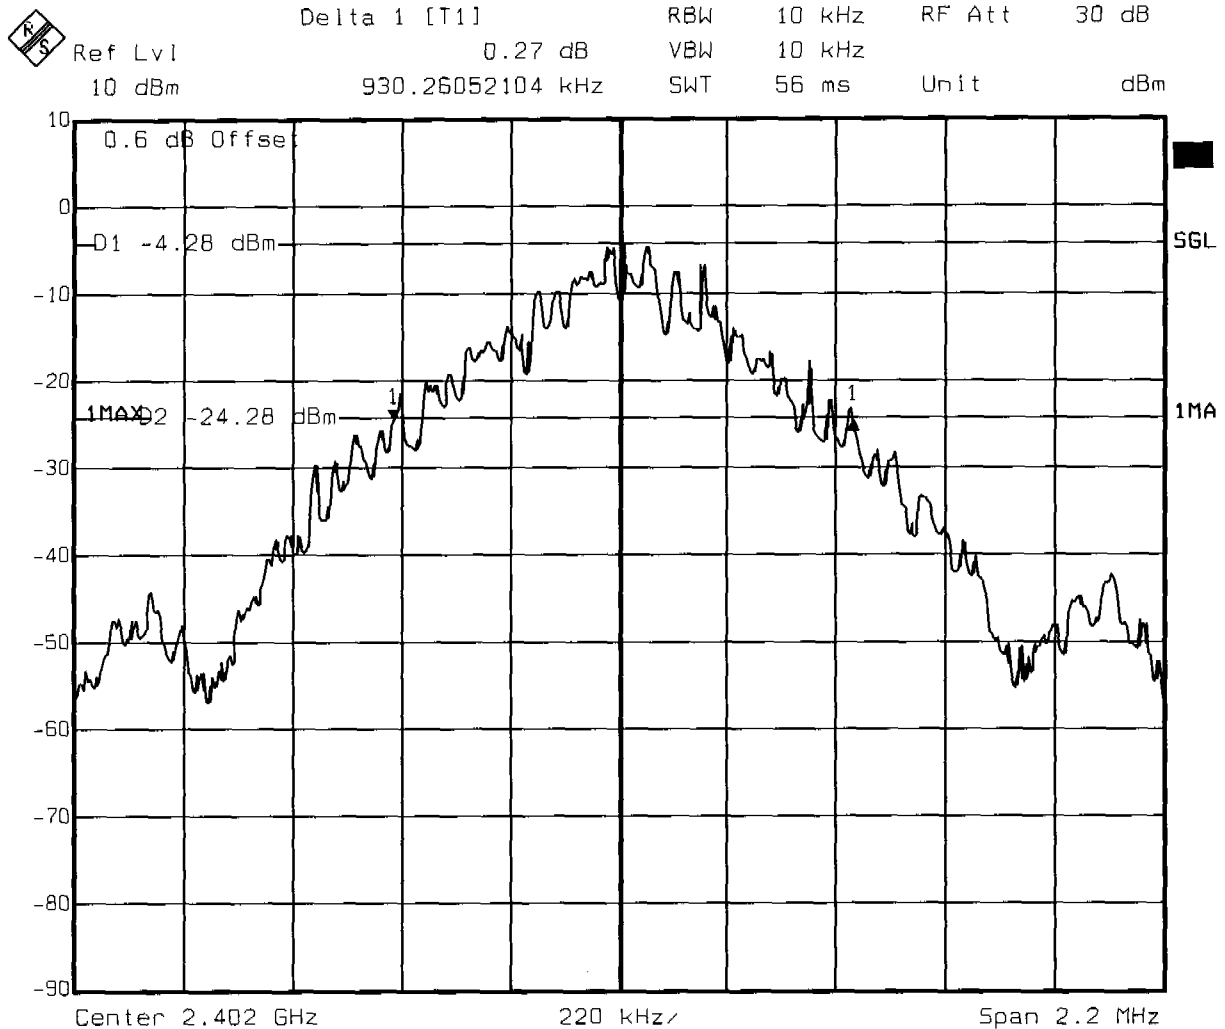

Date: 26.APR.2006 08:23:35

Measurement diagram




Appendix B


RF power output conducted

FCC part 15.247

Peak output power conducted

EUT	Bluetooth office headset and base
Model	GN 5300hs
Approval Holder	GN Netcom
Temperature / Voltage	23°C / 3.7 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(b)
Comment 1	Peak output power
Comment 2	Channel.: 0 / 2402 MHz
Comment 3	

	Marker 1 [T1]	RBW	1 MHz	RF Att	40 dB
	Ref Lvl	2.01 dBm	VBW	1 MHz	
	20 dBm	2.40179659 GHz	SWT	5 ms	Unit dBm

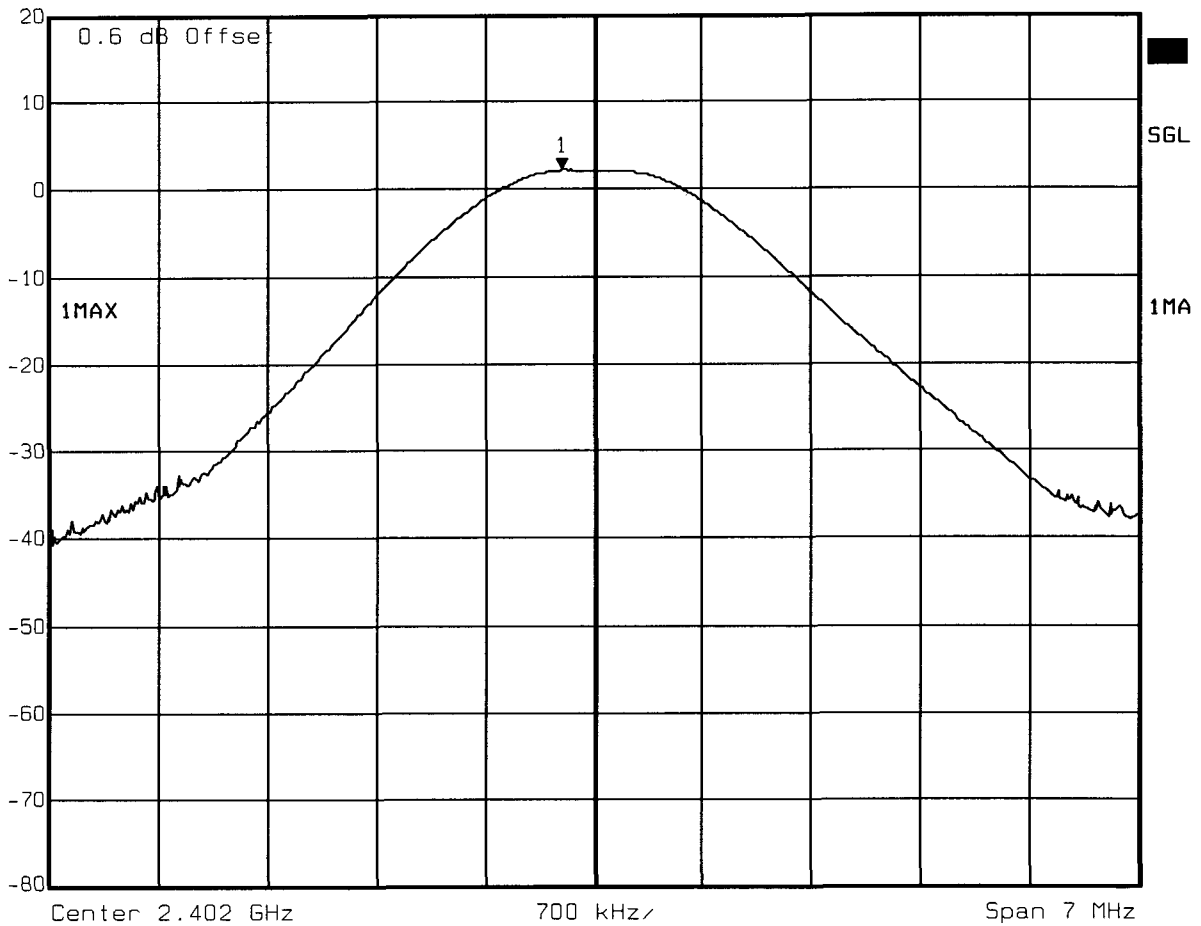


Date: 26.APR.2006 08:00:49


Measurement diagram

FCC part 15.247

Peak output power conducted

EUT	Bluetooth office headset and base
Model	GN 5300hs
Approval Holder	GN Netcom
Temperature / Voltage	23°C / 3.7 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(b)
Comment 1	Peak output_power
Comment 2	Channel.: 39 / 2441 MHz
Comment 3	

	Marker 1 [T1]	RBW	1 MHz	RF Att	40 dB
	Ref Lvl	2.22 dBm	VBW	1 MHz	
	20 dBm	2.44082465 GHz	SWT	5 ms	Unit

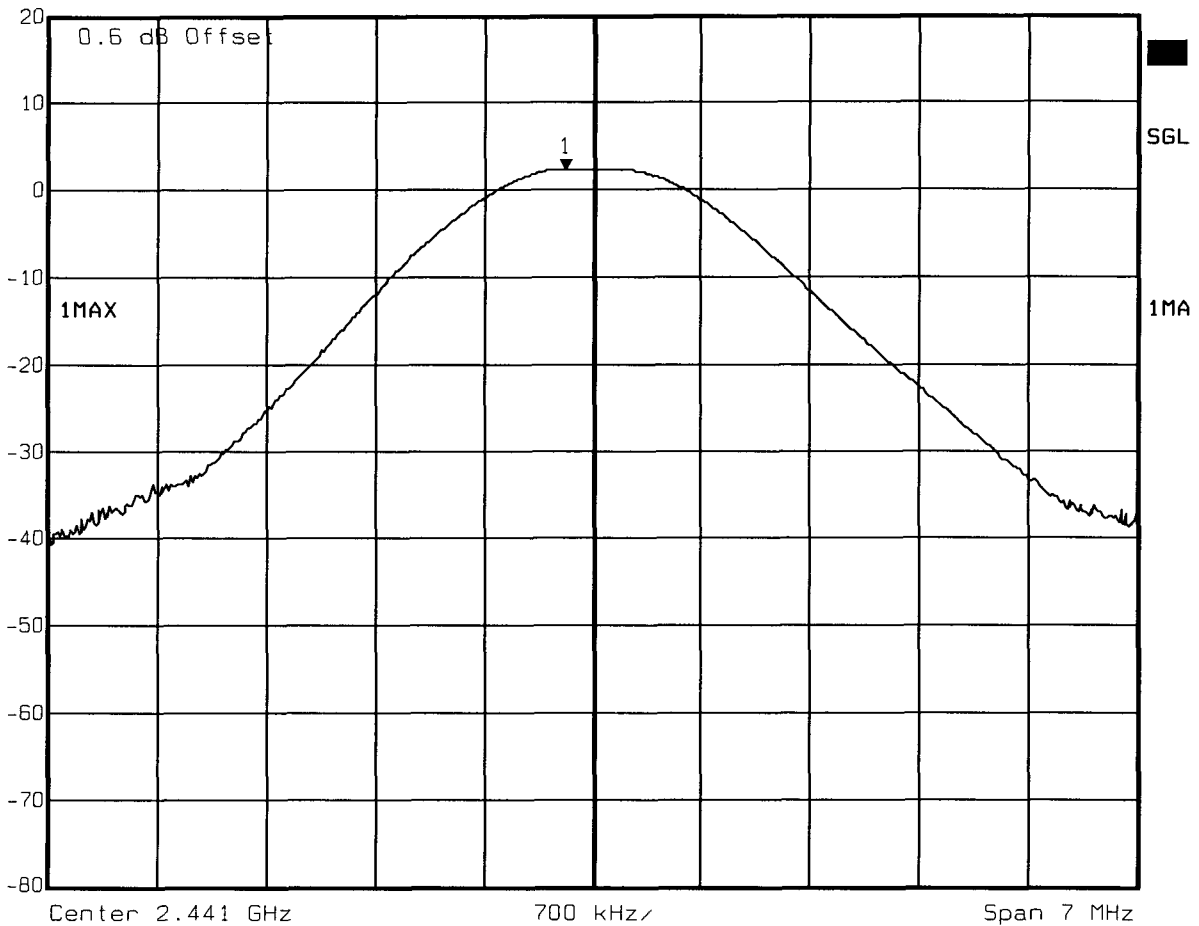


Date: 26.APR.2006 08:04:38


Measurement diagram

FCC part 15.247

Peak output power conducted

EUT	Bluetooth office headset and base
Model	GN 5300hs
Approval Holder	GN Netcom
Temperature / Voltage	23°C / 3.7 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(b)
Comment 1	Peak output power
Comment 2	Channel.: 78 / 2480 MHz
Comment 3	

	Marker 1 [T1]	RBW	1 MHz	RF Att	40 dB
	Ref Lvl	2.04 dBm	VBW	1 MHz	
	20 dBm	2.47985271 GHz	SWT	5 ms	Unit

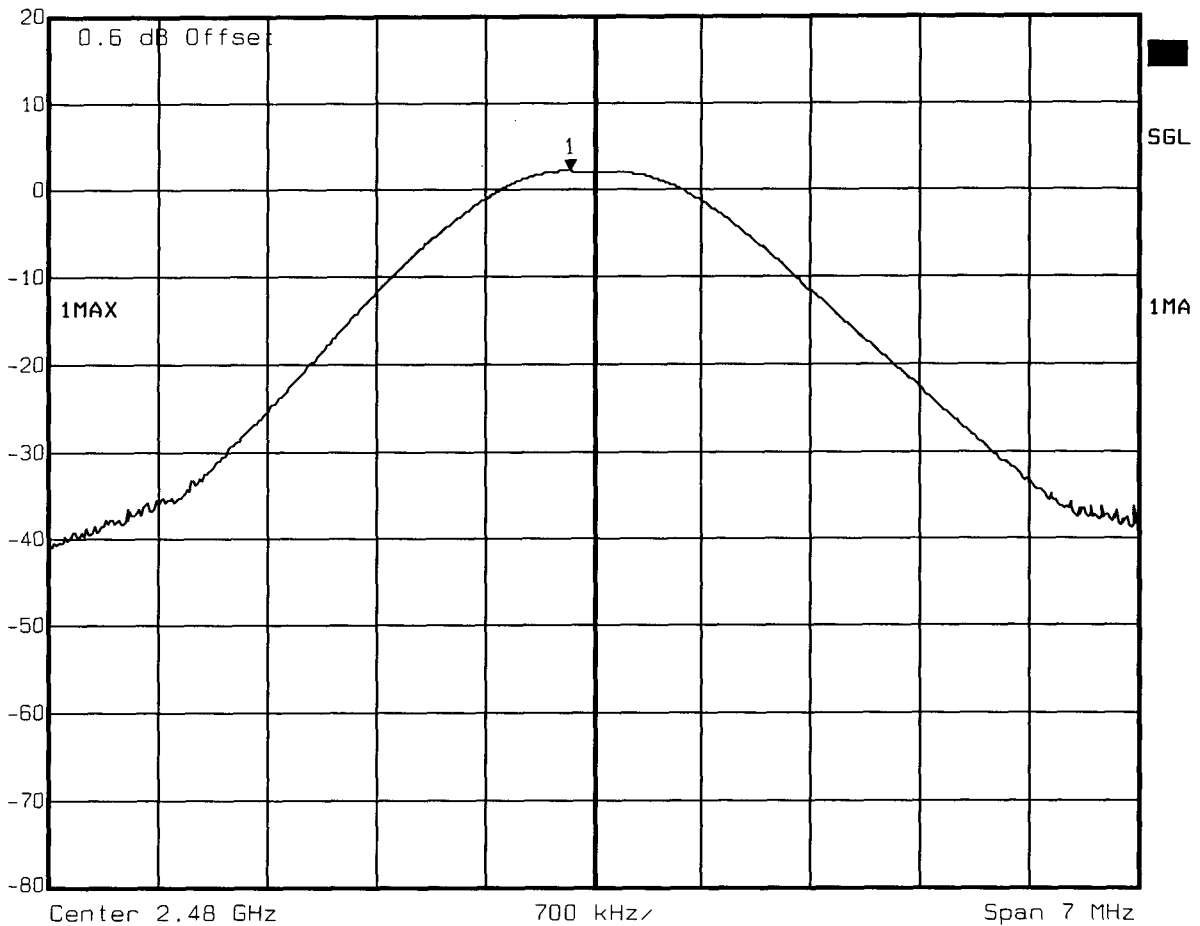

Date: 26.APR.2006 08:10:38

Measurement diagram



Appendix C

RF power output radiated (EIRP)




Appendix D

20 dB bandwidth



**FCC part 15.247
20 dB bandwidth**

EUT	Bluetooth office headset and base
Model	GN 5300hs
Approval Holder	GN Netcom
Temperature / Voltage	23°C / 3.7 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(a)
Comment 1	20 dB bandwidth
Comment 2	Channel.: 0 / 2402 MHz
Comment 3	

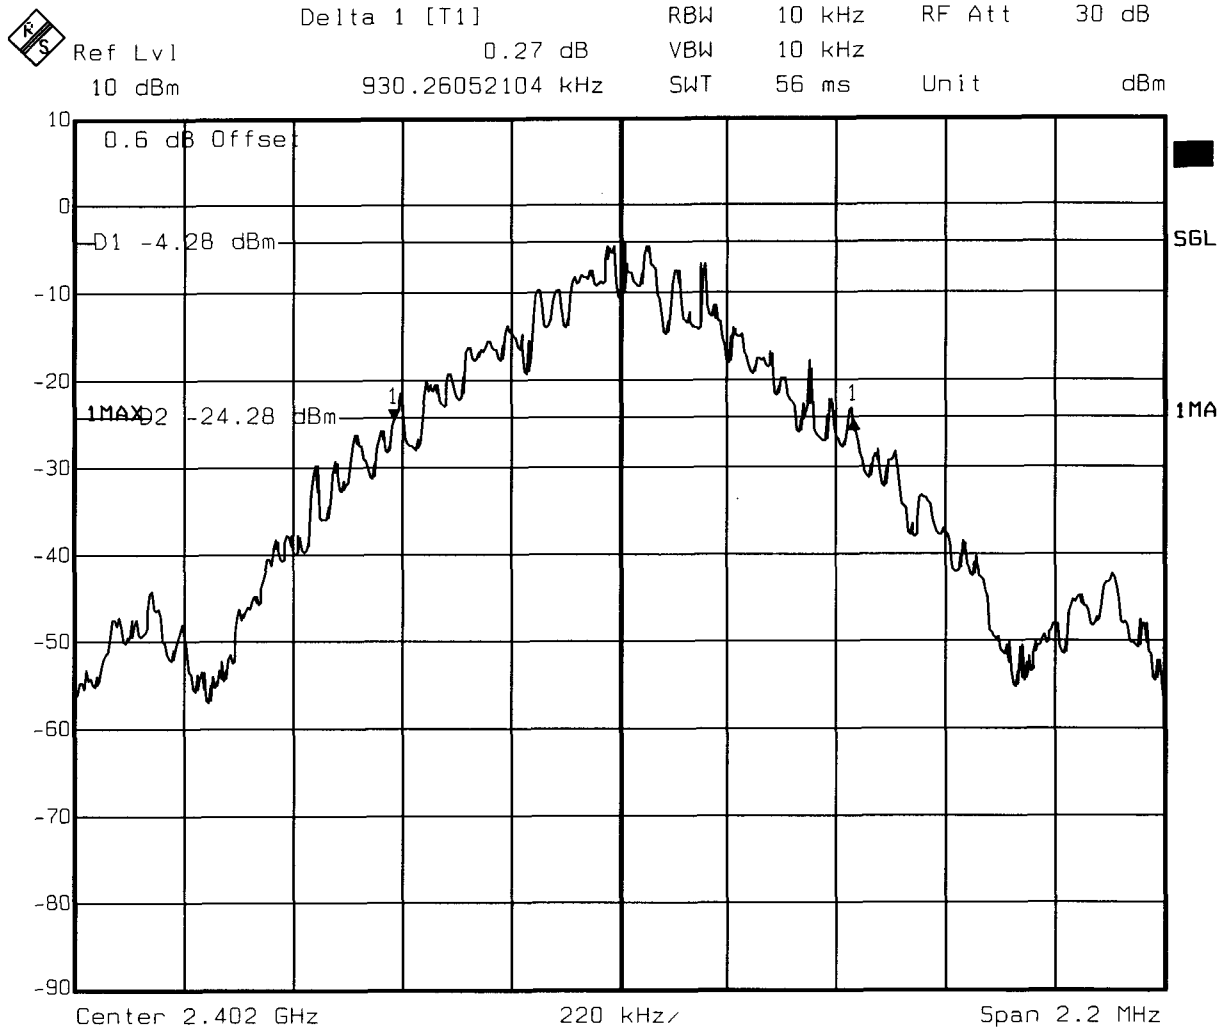

Date: 26.APR.2006 08:23:35


Measurement diagram



**FCC part 15.247
20 dB bandwidth**

EUT	Bluetooth office headset and base
Model	GN 5300hs
Approval Holder	GN Netcom
Temperature / Voltage	23°C / 3.7 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(a)
Comment 1	20 dB bandwidth
Comment 2	Channel.: 39 / 2441 MHz
Comment 3	

	Delta 1 [T1]	RBW	10 kHz	RF Att	30 dB
	Ref Lvl	-0.15 dB	VBW	10 kHz	
	10 dBm	912.62525050 kHz	SWT	56 ms	Unit

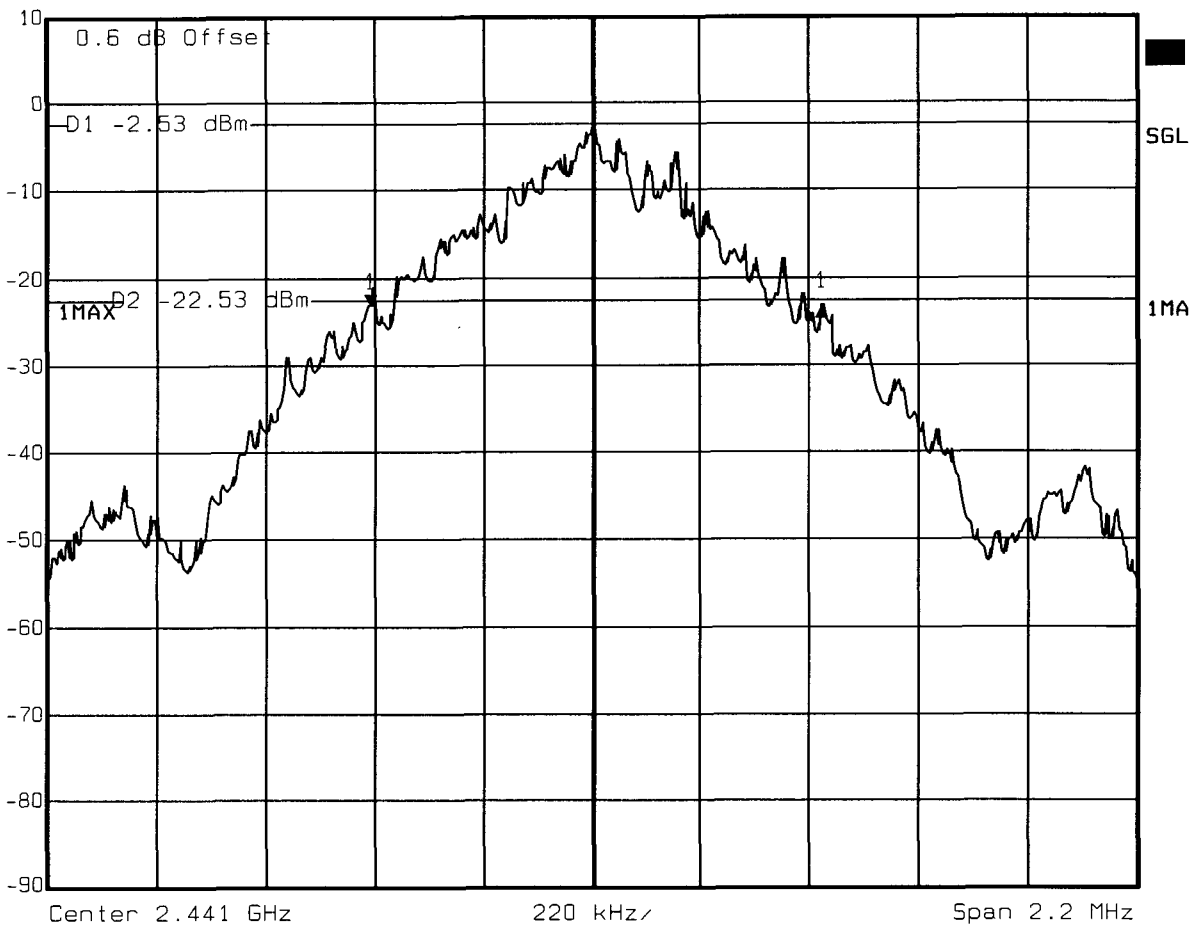


Date: 26.APR.2006 08:20:47

Measurement diagram



FCC part 15.247
20 dB bandwidth

EUT	Bluetooth office headset and base
Model	GN 5300hs
Approval Holder	GN Netcom
Temperature / Voltage	23°C / 3.7 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(a)
Comment 1	20 dB bandwidth
Comment 2	Channel.: 78 / 2480 MHz
Comment 3	

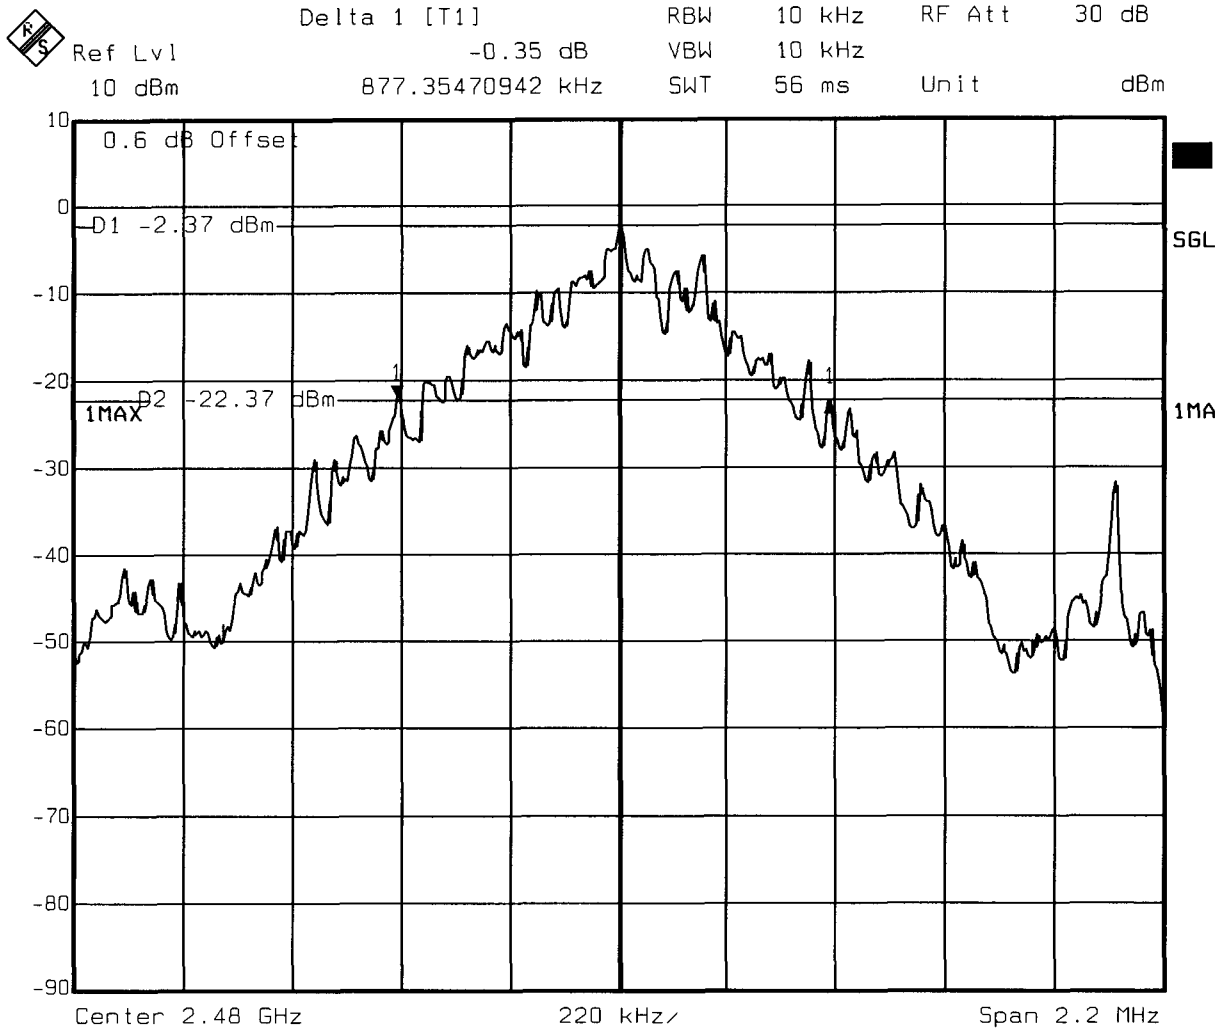

Date: 26.APR.2006 08:17:26

Measurement diagram

Appendix E


Time of occupancy (dwell time)

FCC part 15.247

Time of occupancy (dwell time)

EUT	Bluetooth office headset and base
Model	GN 5300hs
Approval Holder	GN Netcom
Temperature / Voltage	23°C / 3.7 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(a)
Comment 1	Time of occupancy
Comment 2	Channel.: 39 / 2441 MHz (Hopping mode)
Comment 3	63 events * 2.920 ms result: 183.960 ms

RS	Delta 1 [T1]	RBW	1 MHz	RF Att	30 dB
	Ref Lvl	-0.23 dB	VBW	1 MHz	
	10 dBm	2.920040 ms	SWT	5 ms	Unit dBm

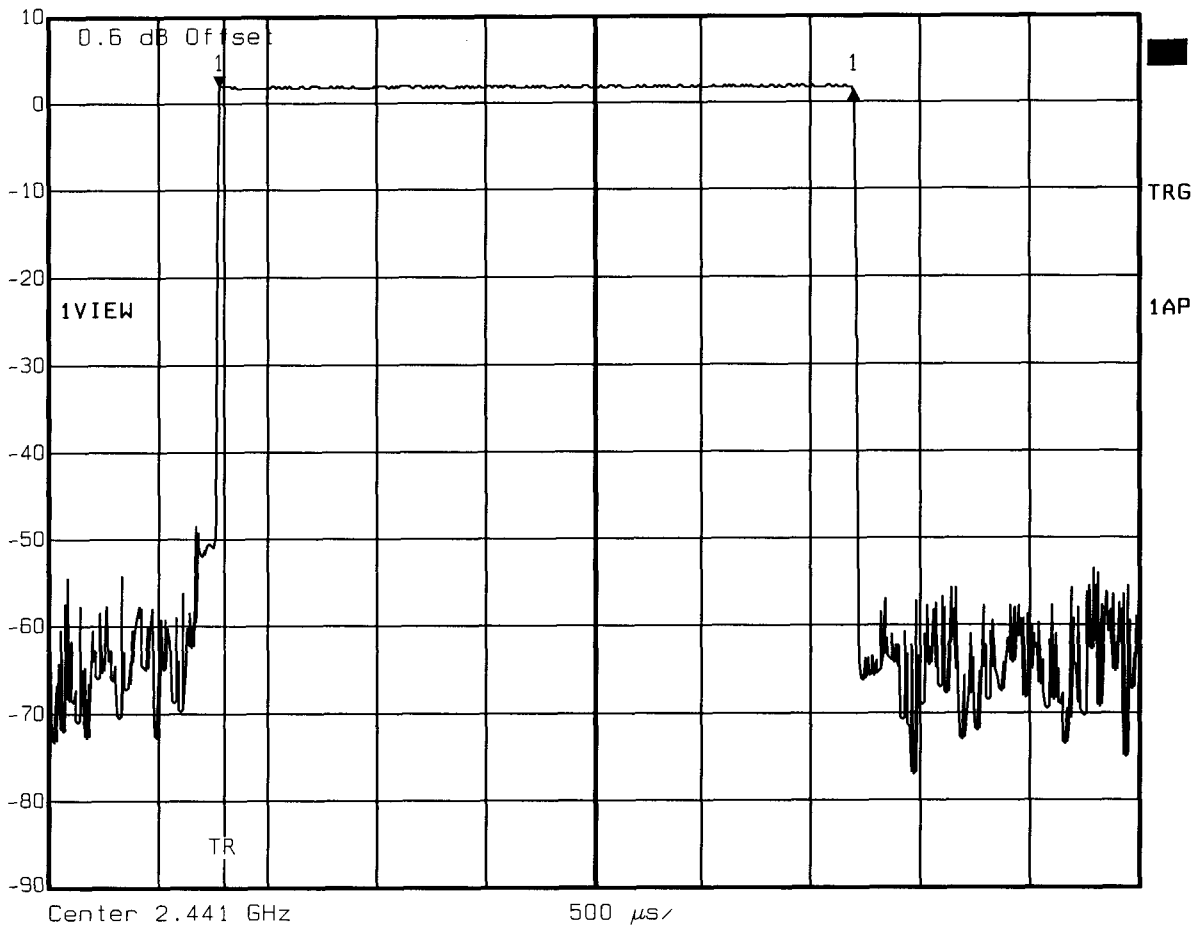


Date: 26.APR.2006 11:58:46

Measurement diagram

FCC part 15.247
Duty cycle

EUT	Bluetooth office headset and base
Model	GN 5300hs
Approval Holder	GN Netcom
Temperature / Voltage	23°C / 3.7 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(b)
Comment 1	Duty cycle
Comment 2	Channel.: 39 / 2441 MHz
Comment 3	

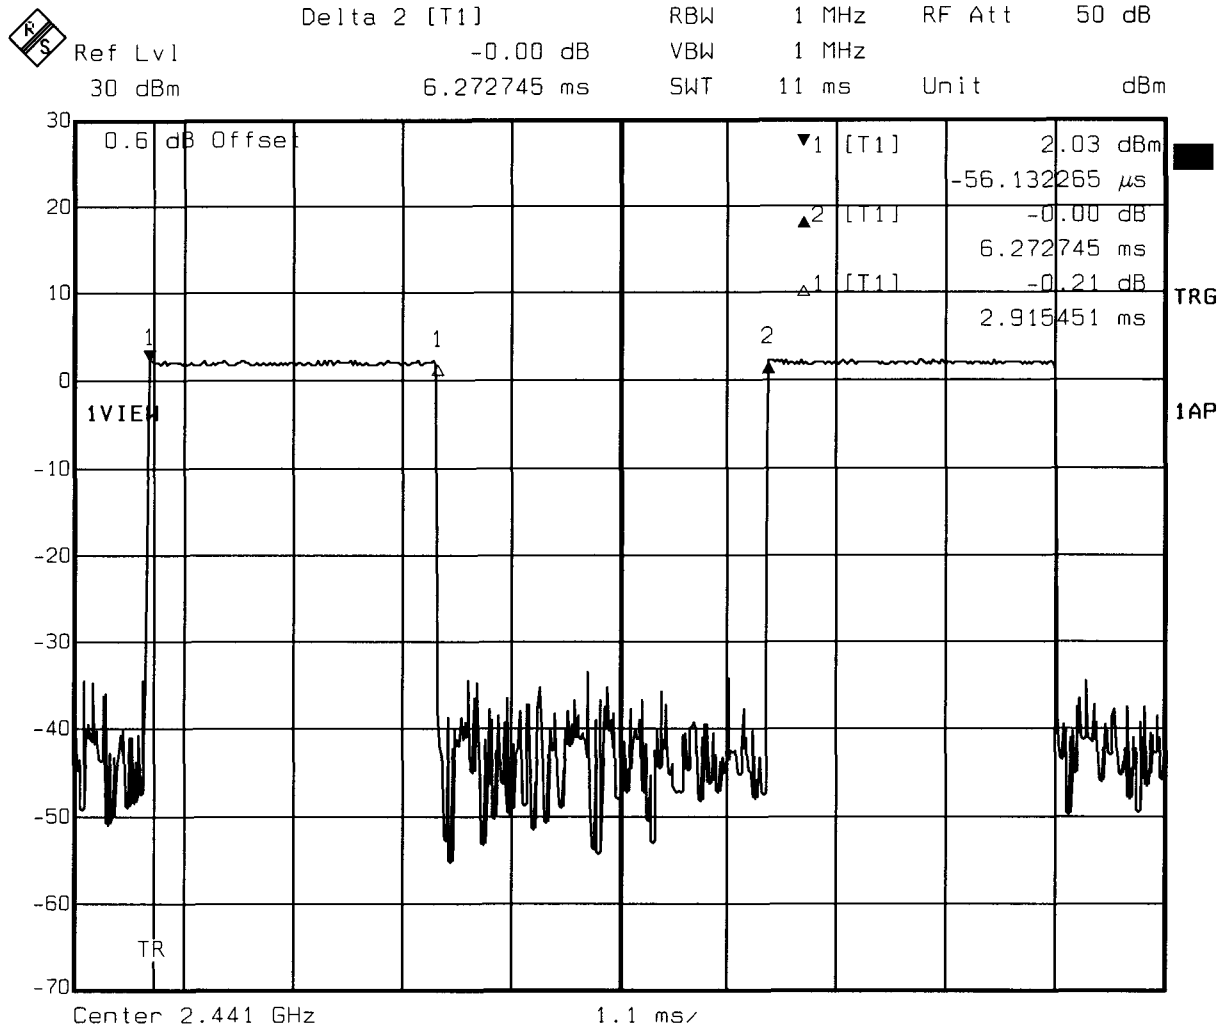

Date: 26.APR.2006 09:17:31


Measurement diagram

Appendix F

Number of hopping frequencies

FCC part 15.247
Number of hopping frequencies

EUT	Bluetooth office headset and base
Model	GN 5300hs
Approval Holder	GN Netcom
Temperature / Voltage	23°C / 3.7 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(a)
Comment 1	Number of hopping frequencies
Comment 2	Channel.: 0-13
Comment 3	

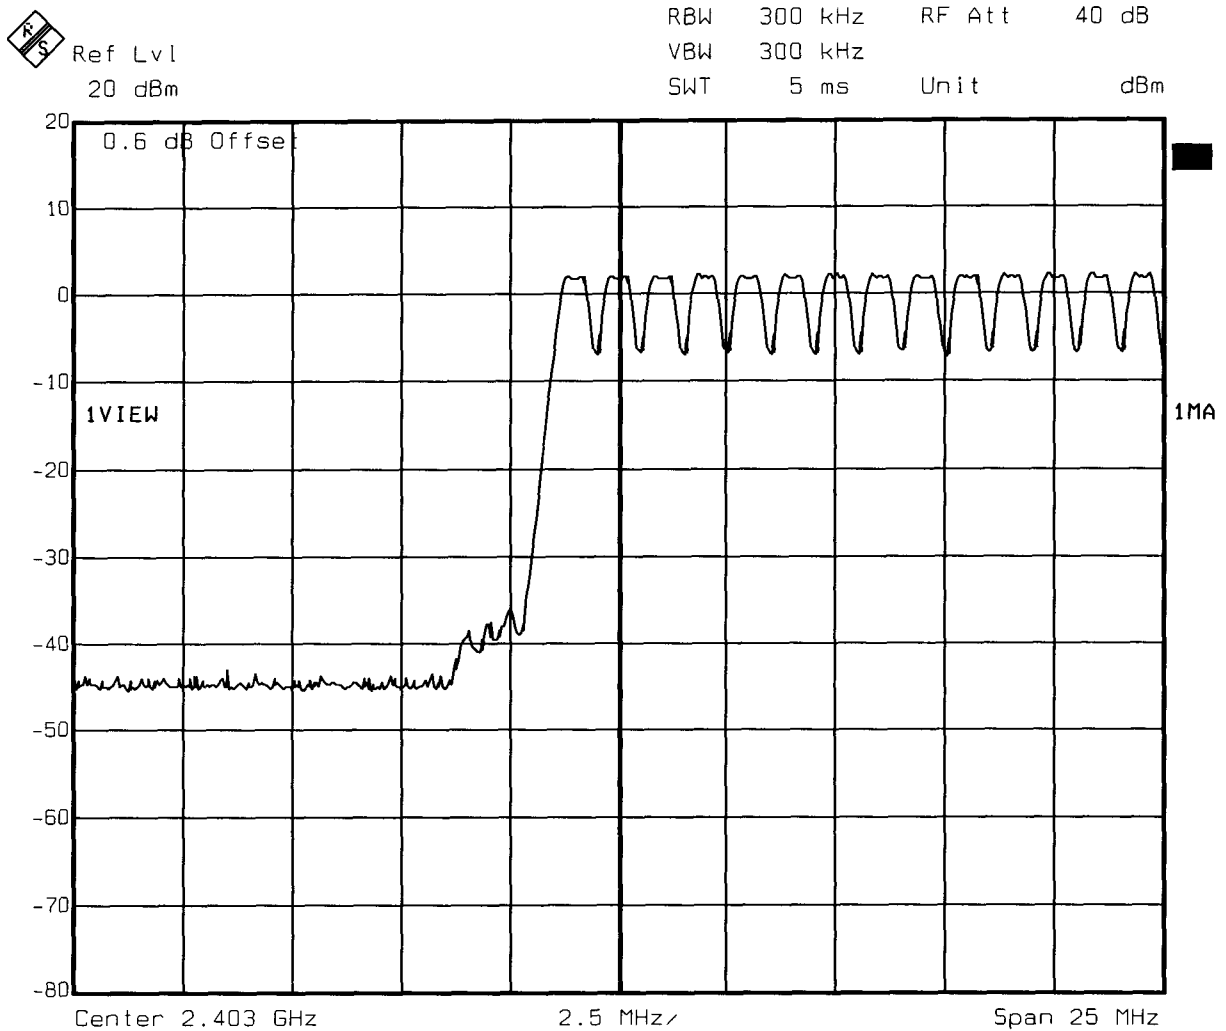


Date: 26.APR.2006 09:42:23

Measurement diagram



FCC part 15.247
Number of hopping frequencies

EUT	Bluetooth office headset and base
Model	GN 5300hs
Approval Holder	GN Netcom
Temperature / Voltage	23°C / 3.7 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(a)
Comment 1	Number of hopping frequencies
Comment 2	Channel.: 14-38
Comment 3	

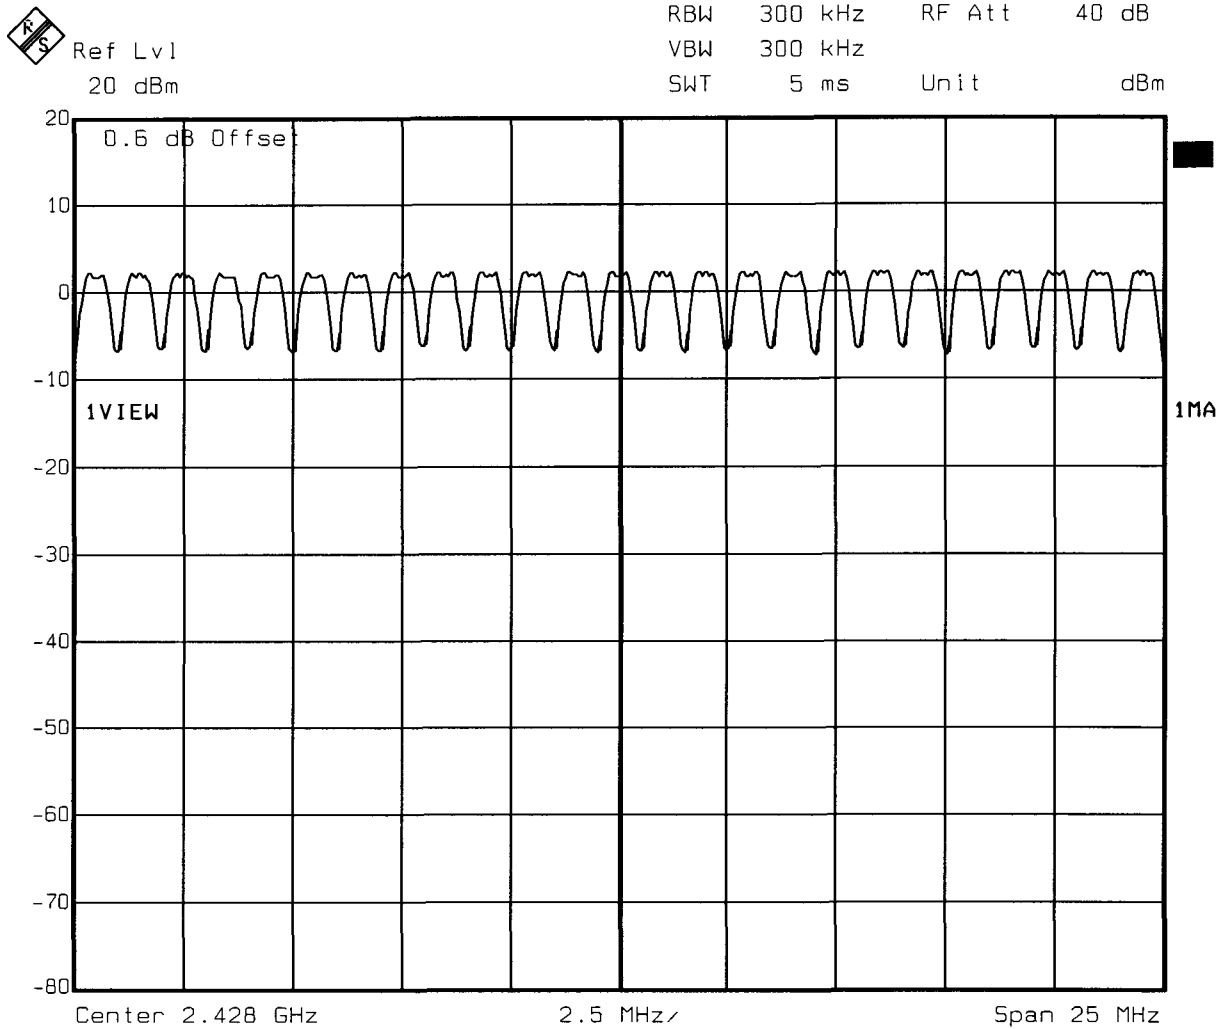


Date: 26.APR.2006 09:47:20

Measurement diagram

FCC part 15.247
Number of hopping frequencies

EUT	Bluetooth office headset and base
Model	GN 5300hs
Approval Holder	GN Netcom
Temperature / Voltage	23°C / 3.7 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(a)
Comment 1	Number of hopping frequencies
Comment 2	Channel.:39-63
Comment 3	

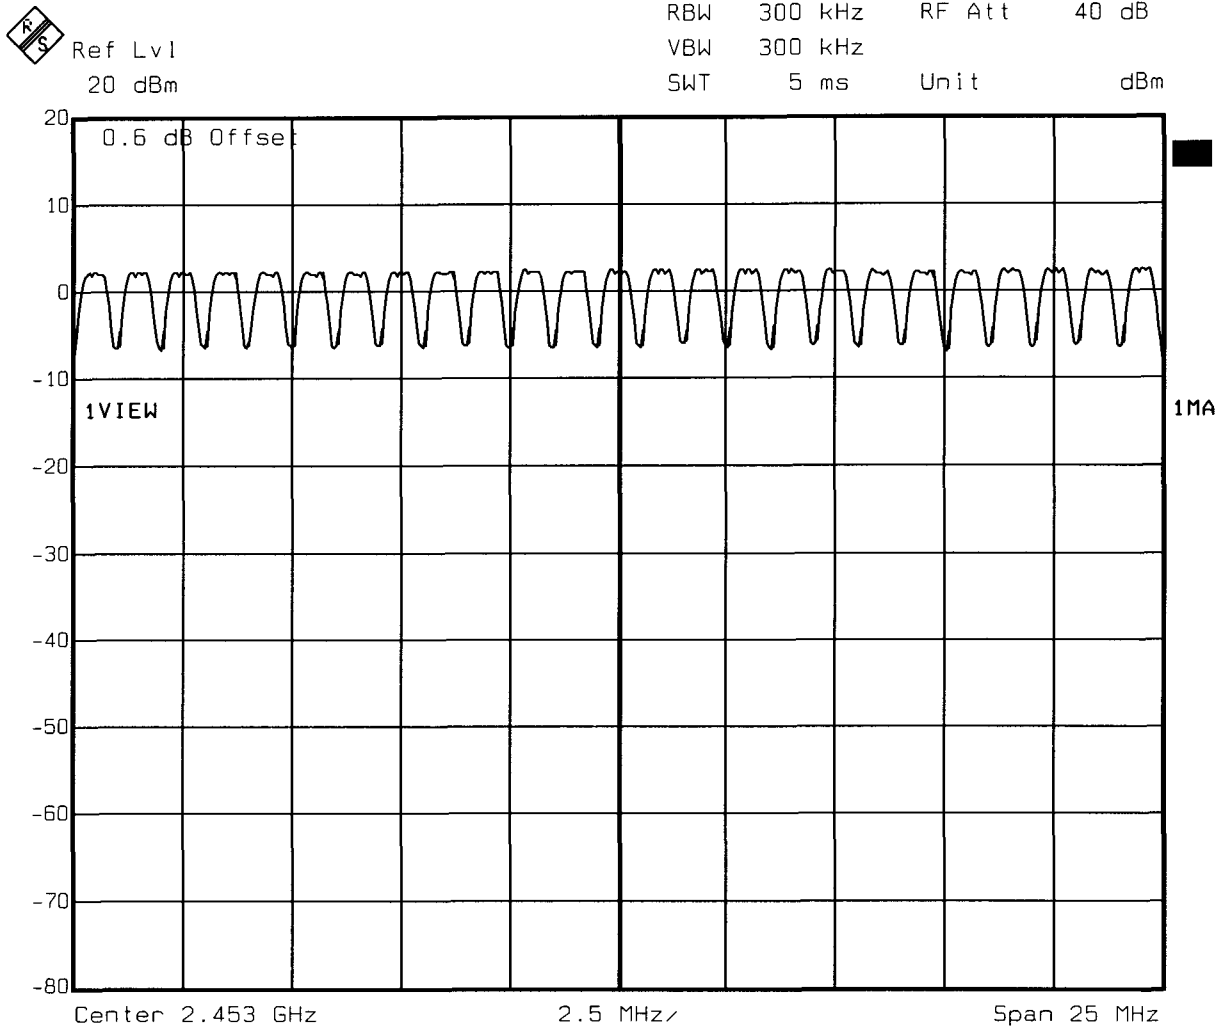


Date: 26.APR.2006 09:55:54

Measurement diagram



FCC part 15.247
Number of hopping frequencies

EUT	Bluetooth office headset and base
Model	GN 5300hs
Approval Holder	GN Netcom
Temperature / Voltage	23°C / 3.7 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(a)
Comment 1	Number of hopping frequencies
Comment 2	Channel.: 64-78
Comment 3	

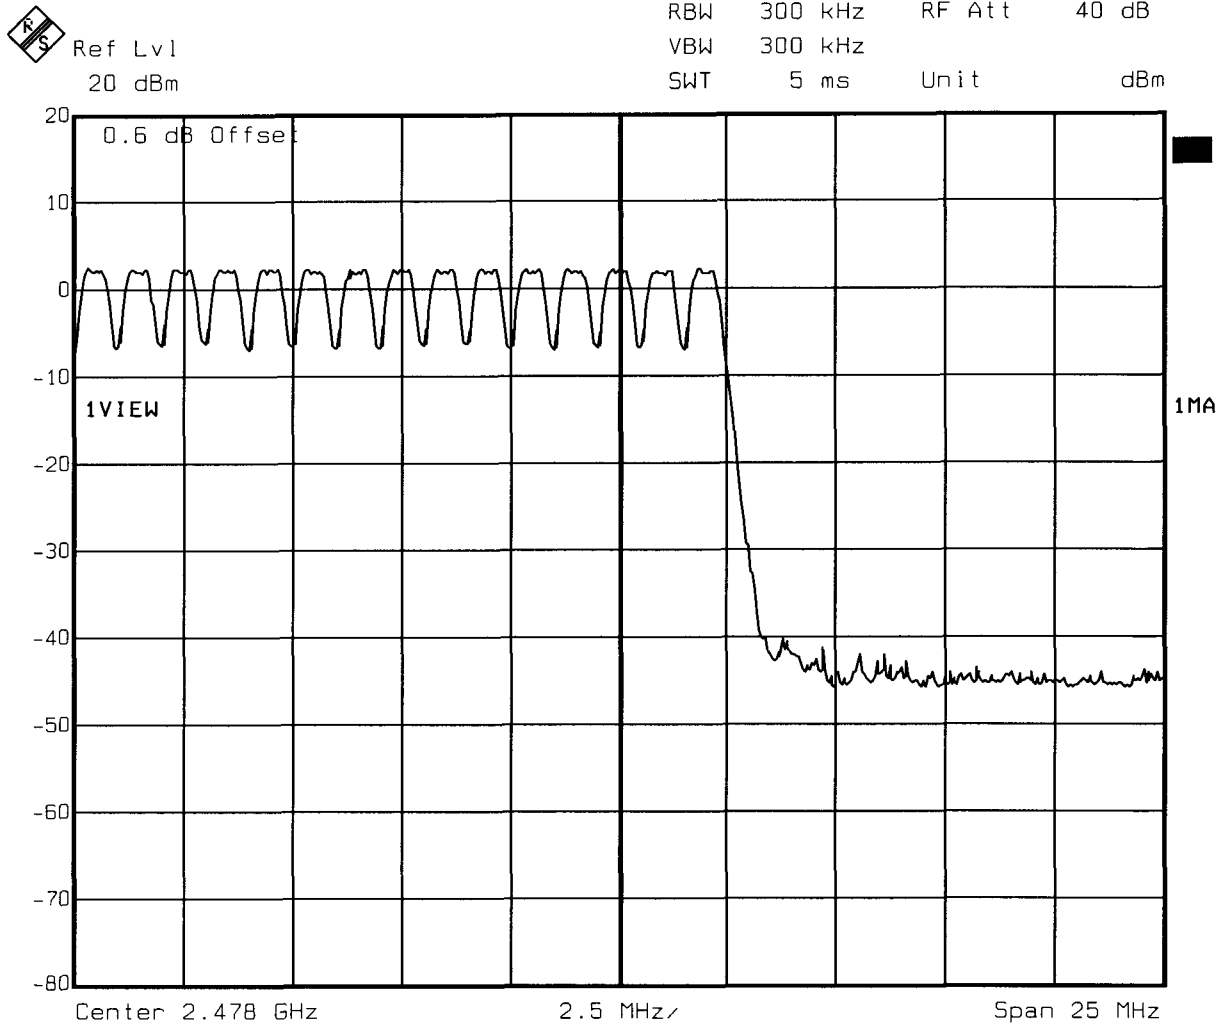

Date: 26.APR.2006 09:59:23

Measurement diagram




Appendix G

Carrier frequency separation

FCC part 15.247
Carrier frequency separation

EUT	Bluetooth office headset and base
Model	GN 5300hs
Approval Holder	GN Netcom
Temperature / Voltage	23°C / 3.7 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(b)
Comment 1	Carrier frequency separation
Comment 2	Channel.: 39/40 / 2441/2442 MHz
Comment 3	Hopping mode

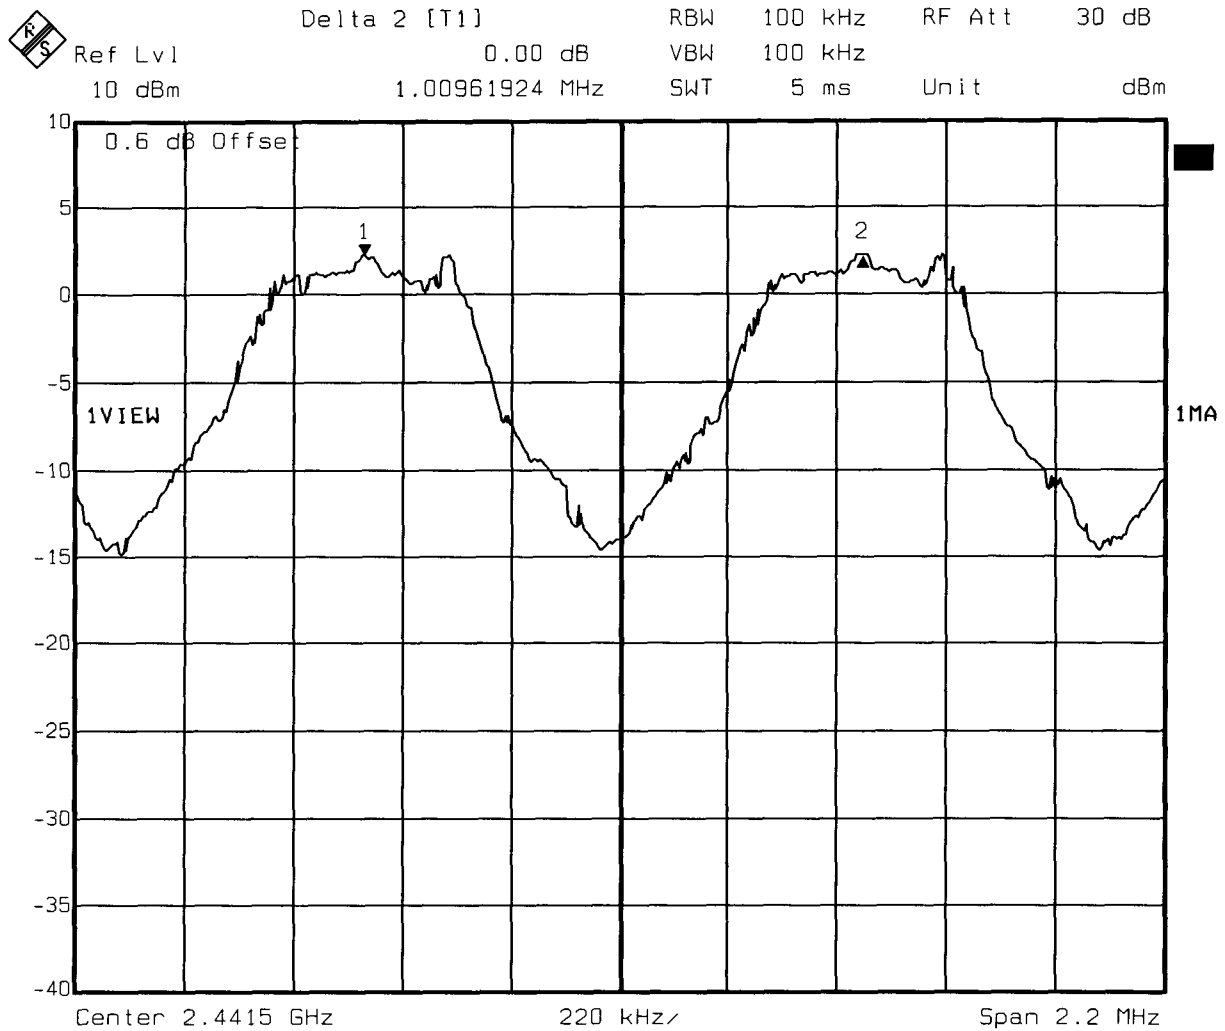

Date: 26.APR.2006 09:35:07

Measurement diagram



Appendix H

Spurious emission conducted




Appendix I

Spurious emission radiated

Carrier power (Field Strength)

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300hs / 2402 MHz
Test Site / Operator: ETS / Mr. Treffke
Test Condition: 25°C / Unom: 3.6 V DC rechargeable battery
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Emax: 95.84dBµV/m, REW: 100kHz

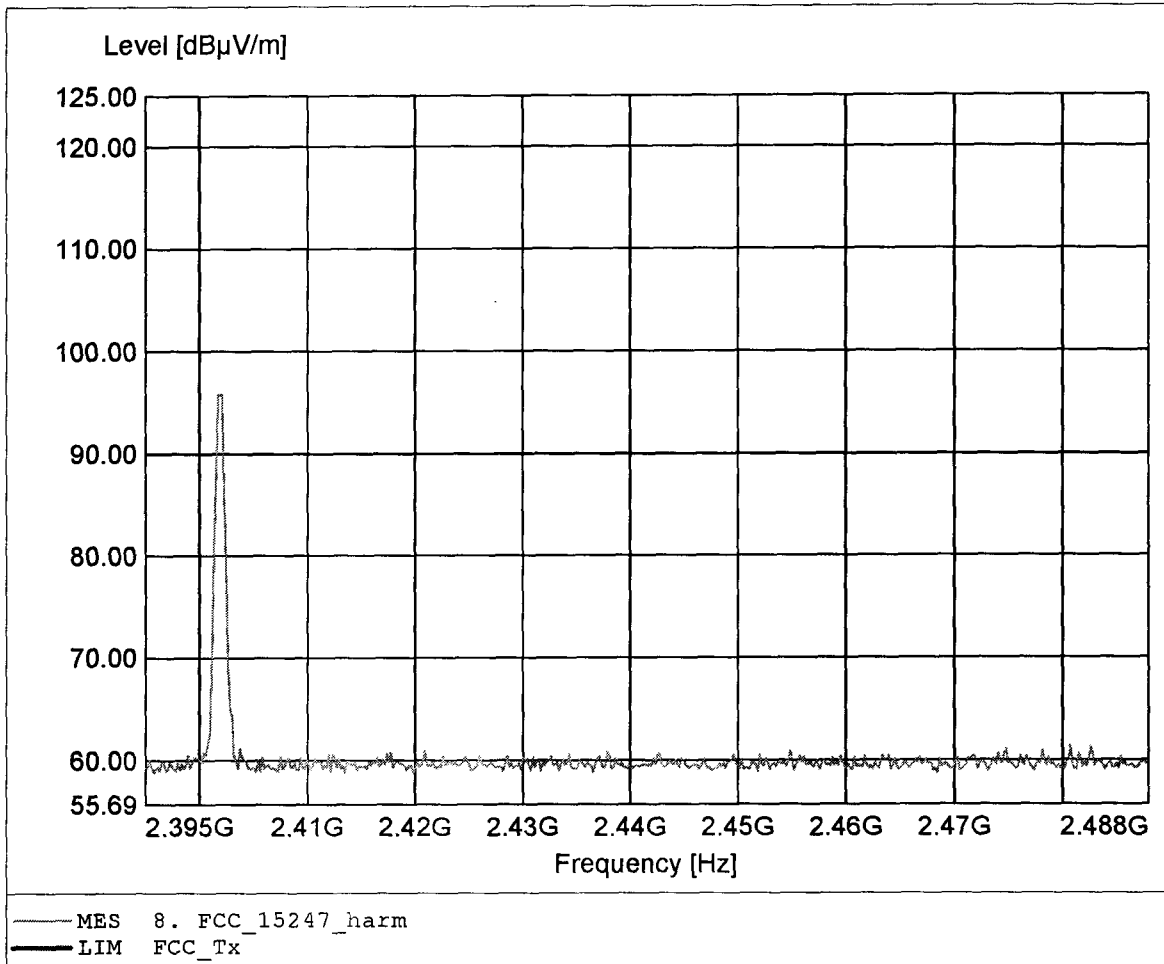

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300hs / 2402 MHz
Test Site / Operator: ETS / Mr. Treffke
Test Condition: 25°C / Unom: 3.6 V DC rechargeable battery
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 189.098MHz, Emax: 32.44dBµV/m, RBW: 100kHz

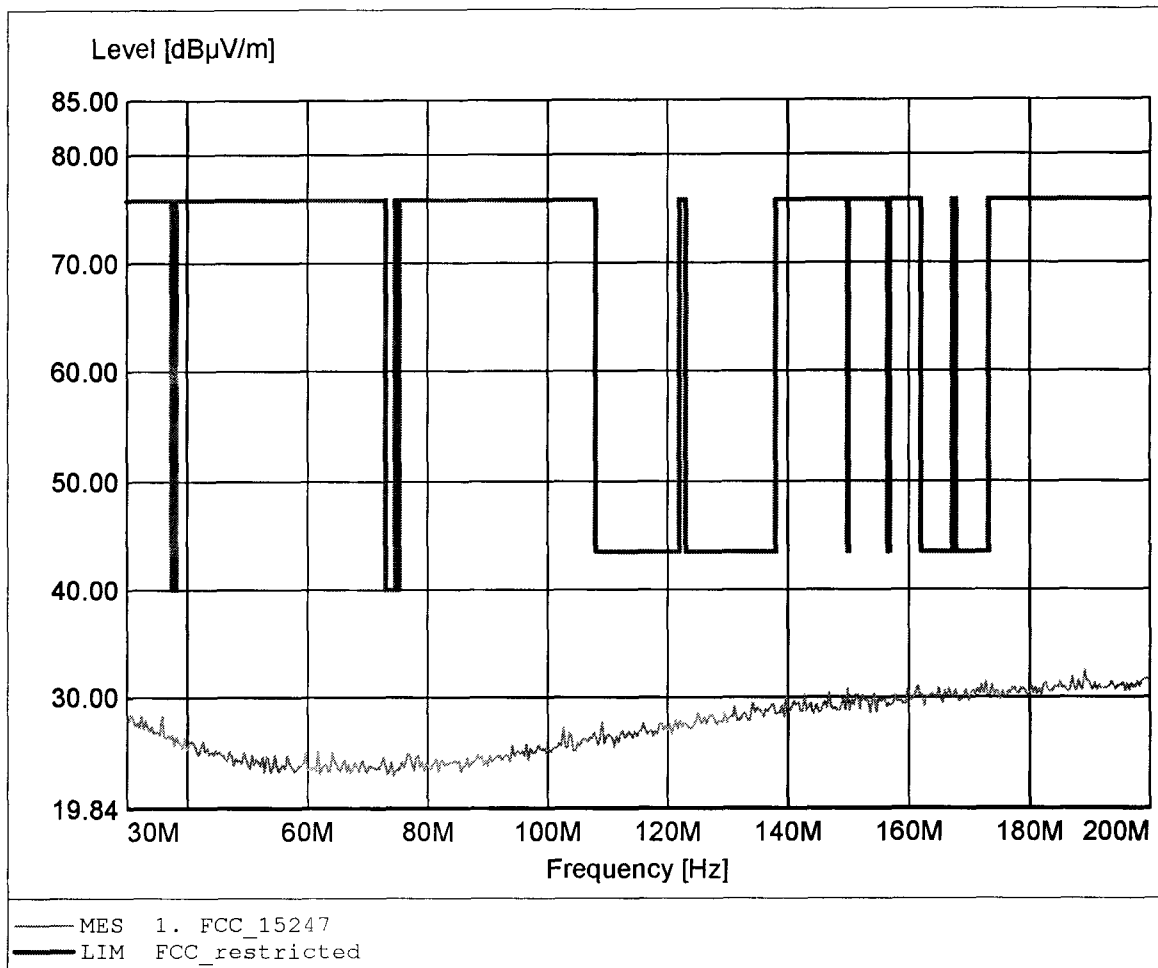

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300hs / 2402 MHz
Test Site / Operator: ETS / Mr. Treffke
Test Condition: 25°C / Unom: 3.6 V DC rechargeable battery
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 198.637MHz, Emax: 32.47dBµV/m, RBW: 100kHz

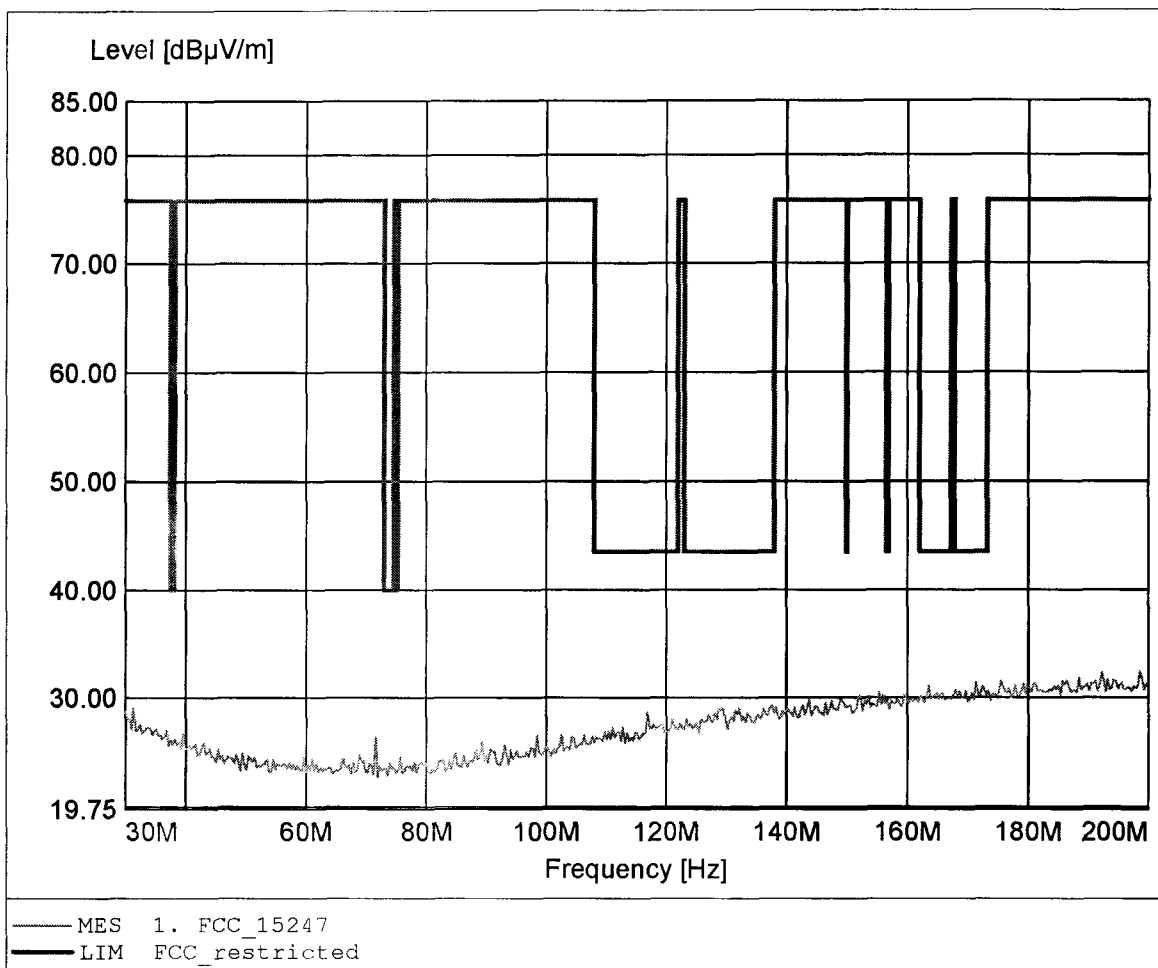

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300hs / 2402 MHz
Test Site / Operator: ETS / Mr. Treffke
Test Condition: 25°C / Unom: 3.6 V DC rechargeable battery
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 1.000GHz, Emax: 26.41dBµV/m, RBW: 100kHz

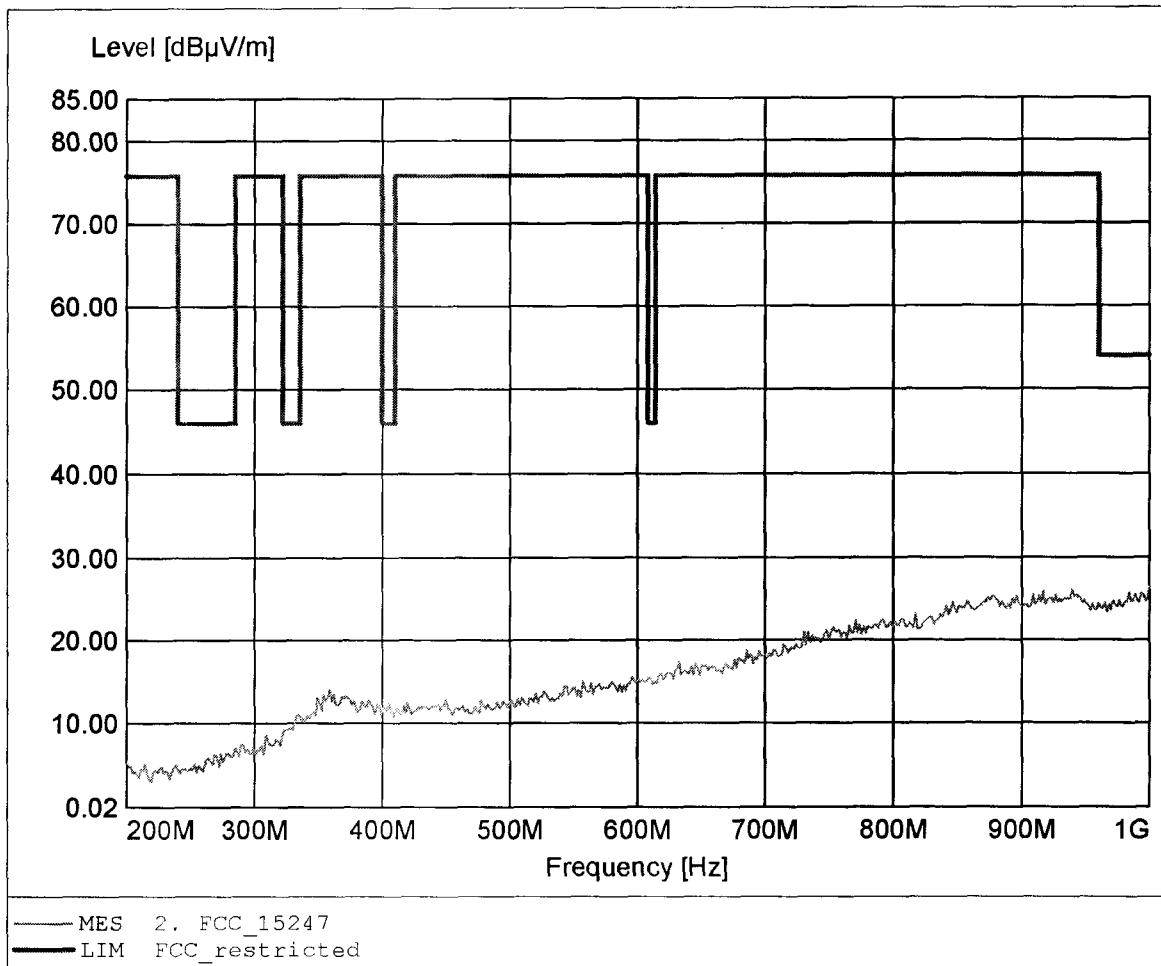

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300hs / 2402 MHz
Test Site / Operator: ETS / Mr. Treffke
Test Condition: 25°C / Unom: 3.6 V DC rechargeable battery
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 902.204MHz, Emax: 24.50dBµV/m, RBW: 100kHz

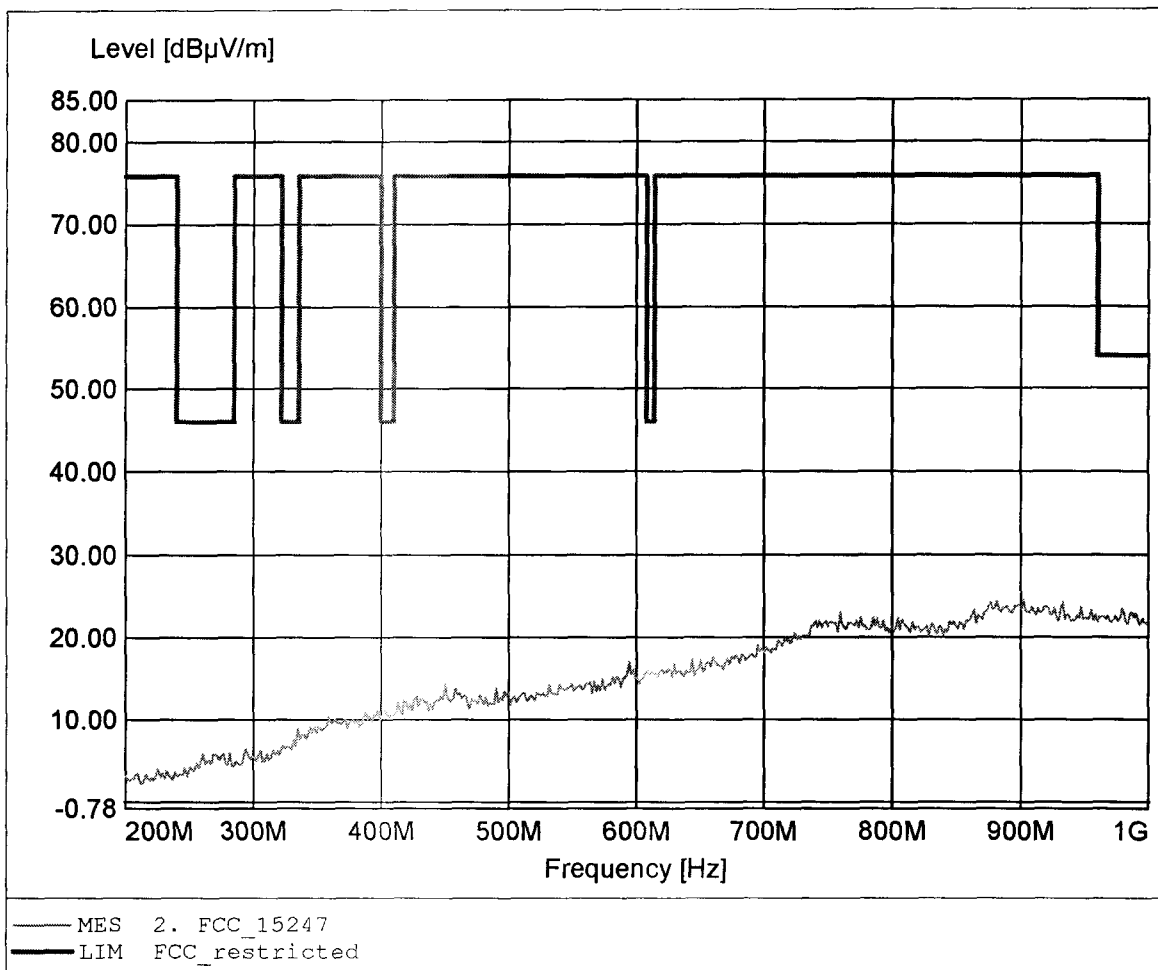

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300hs / 2402 MHz
Test Site / Operator: ETS / Mr. Treffke
Test Condition: 25°C / Unom: 3.6 V DC rechargeable battery
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.884GHz, Emax: 52.19dBuV/m, REW: 1MHz

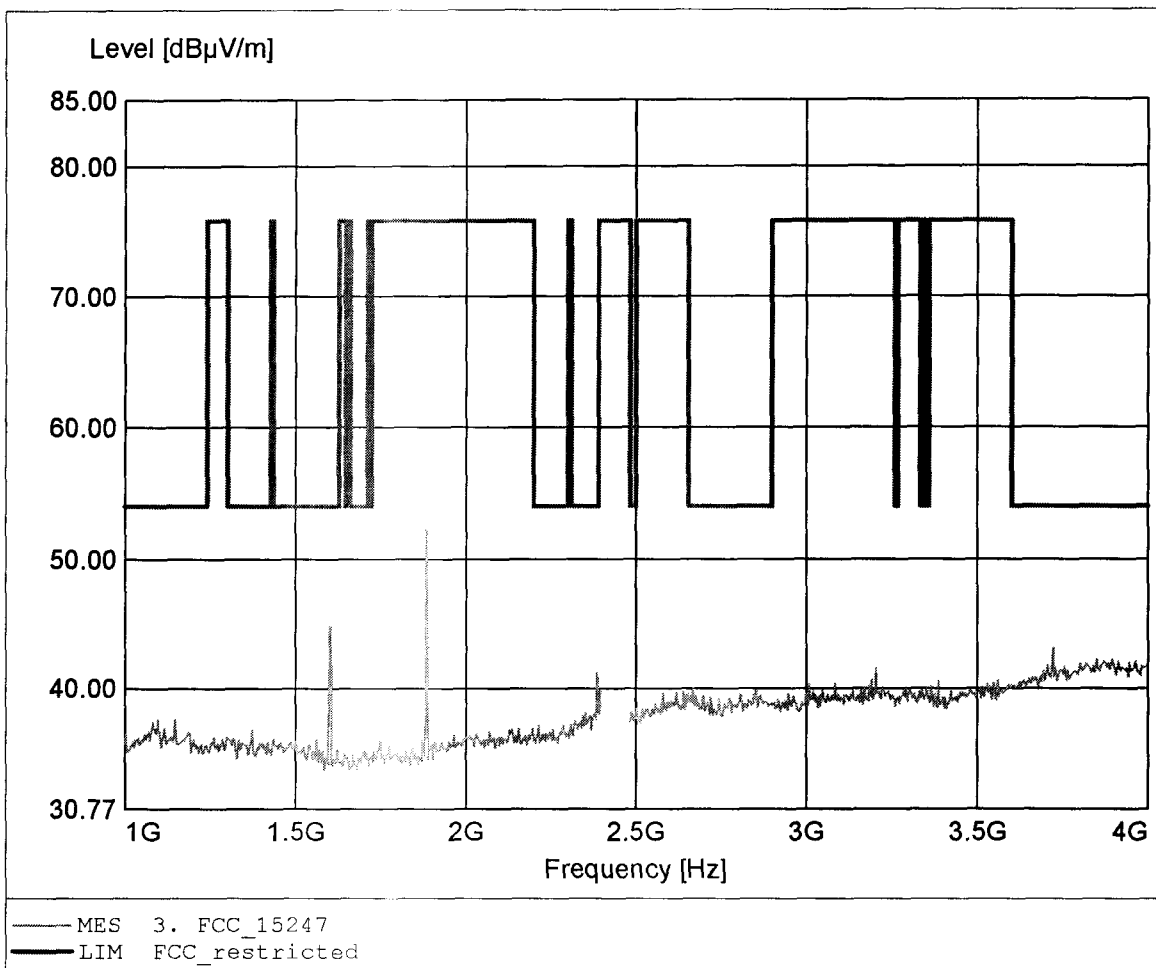

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300hs / 2402 MHz
Test Site / Operator: ETS / Mr. Treffke
Test Condition: 25°C / Unom: 3.6 V DC rechargeable battery
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.884GHz, Emax: 53.74dBµV/m, REW: 1MHz

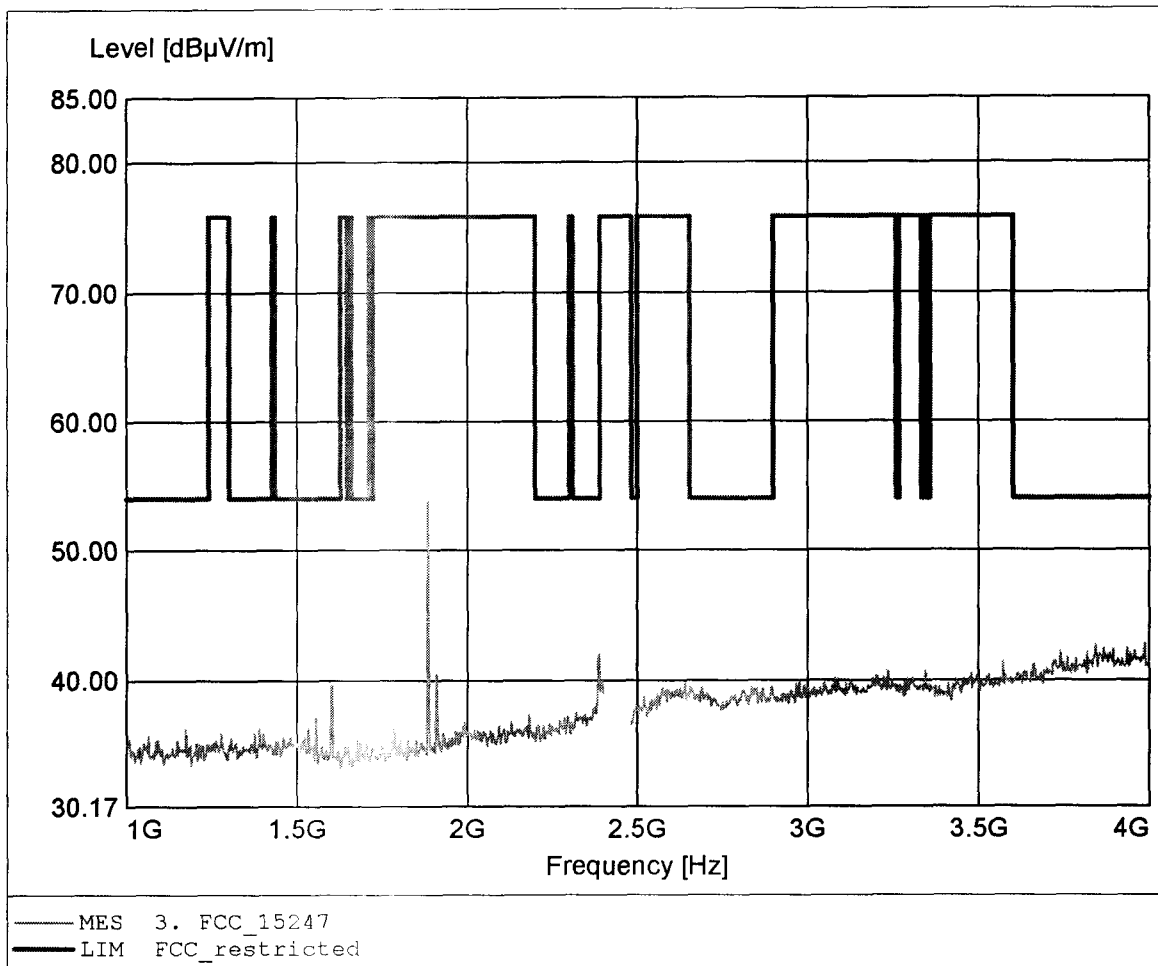

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300hs / 2402 MHz
Test Site / Operator: ETS / Mr. Treffke
Test Condition: 25°C / Unom: 3.6 V DC rechargeable battery
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 47.59dBuV/m, REW: 1MHz

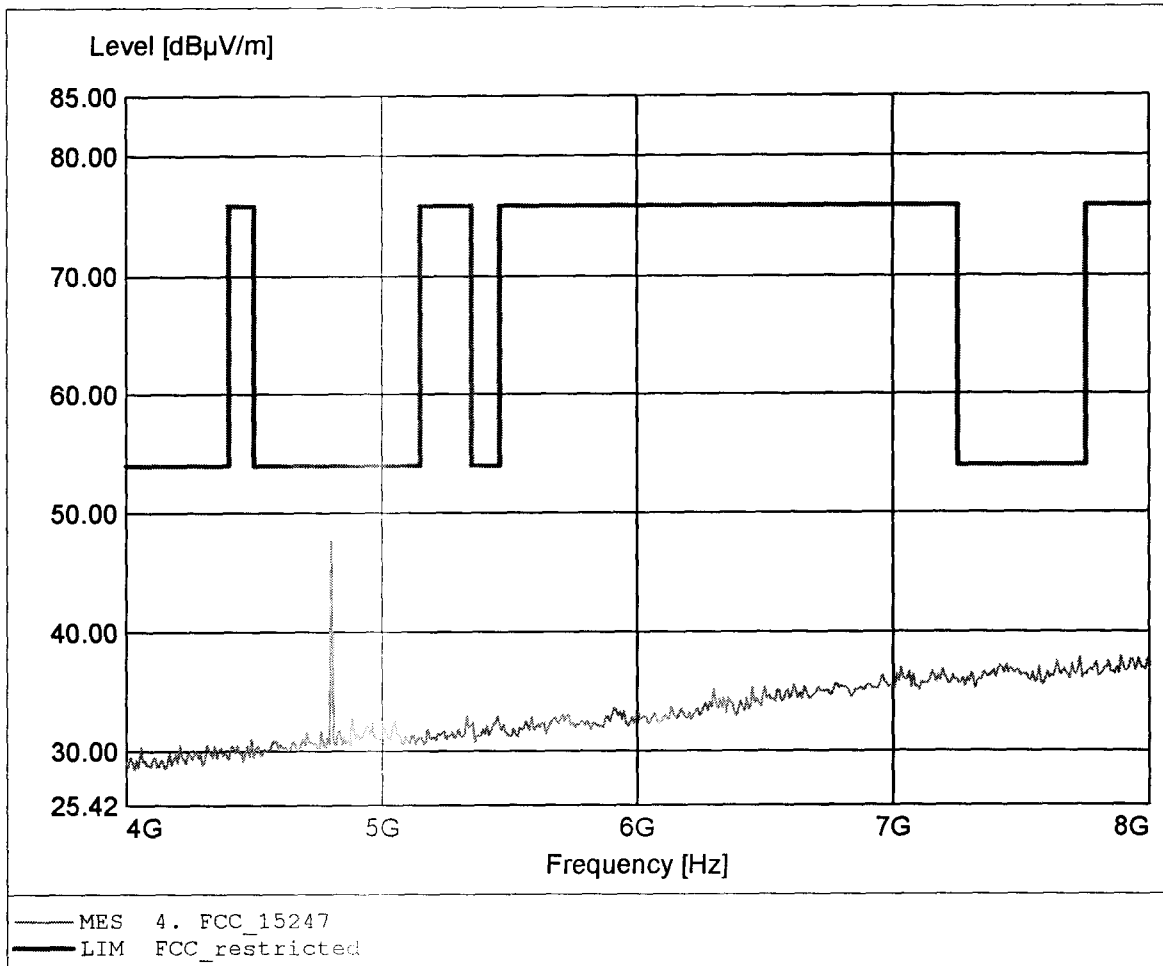

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300hs / 2402 MHz
Test Site / Operator: ETS / Mr. Treffke
Test Condition: 25°C / Unom: 3.6 V DC rechargeable battery
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 51.06dBµV/m, REW: 1MHz

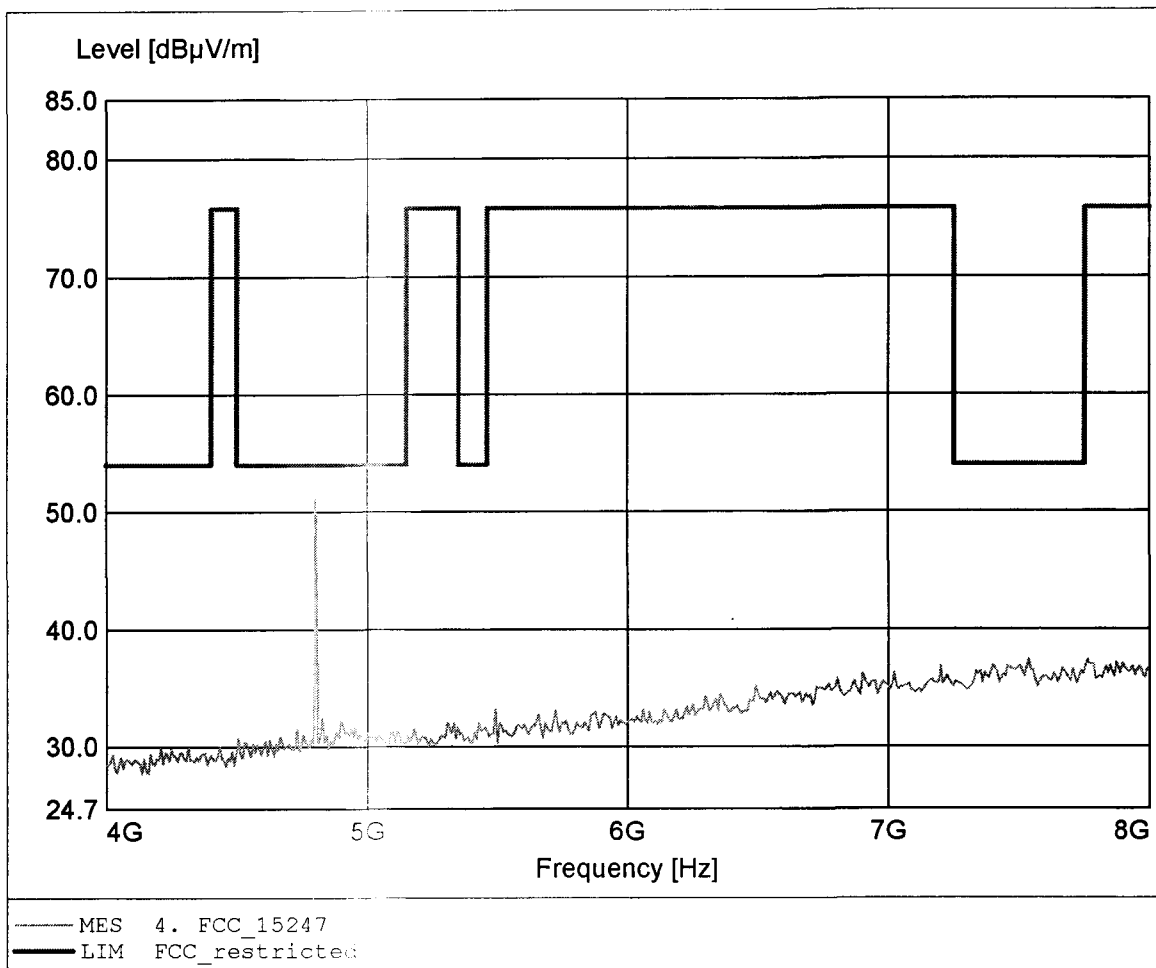

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300hs / 2402 MHz
Test Site / Operator: ETS / Mr. Treffke
Test Condition: 25°C / Unom: 3.6 V DC rechargeable battery
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.142GHz, Emax: 41.69dBuV/m, RBW: 1MHz

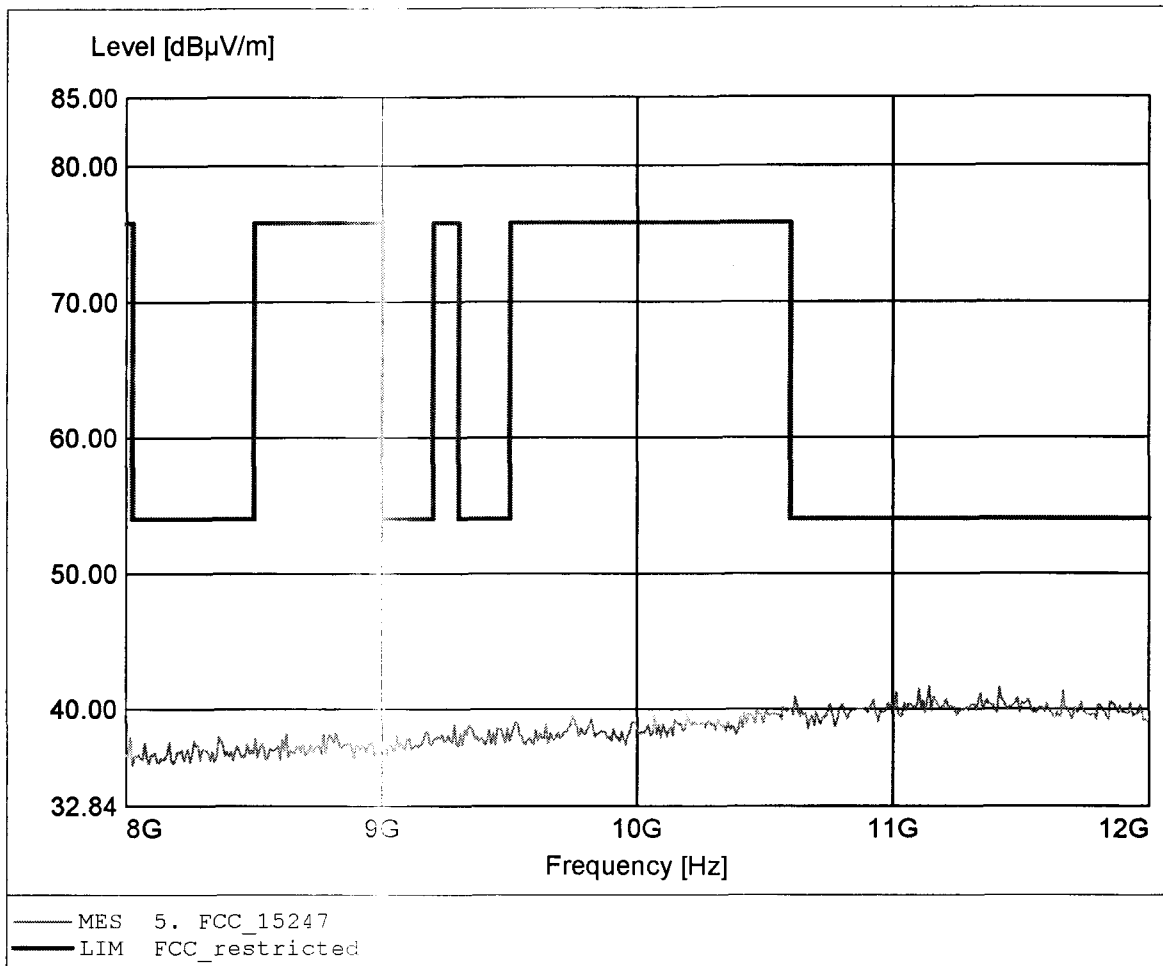

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300hs / 2402 MHz
Test Site / Operator: ETS / Mr. Treffke
Test Condition: 25°C / Unom: 3.6 V DC rechargeable battery
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.383GHz, Emax: 41.36dBuV/m, RBW: 1MHz

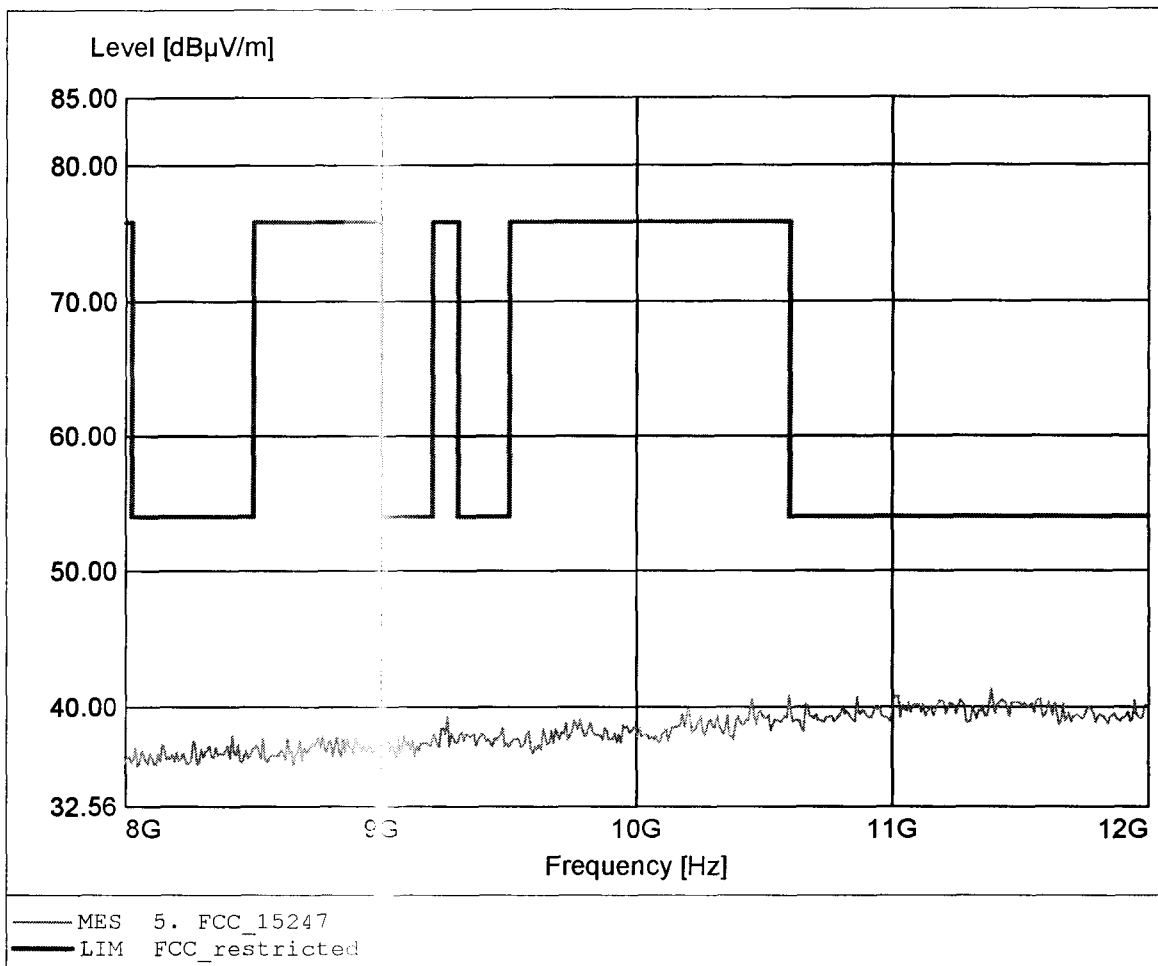

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300hs / 2402 MHz
Test Site / Operator: ETS / Mr. Treffke
Test Condition: 25°C / Unom: 3.6 V DC rechargeable battery
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 16.920GHz, Emax: 43.61dBµV/m, RBW: 1MHz

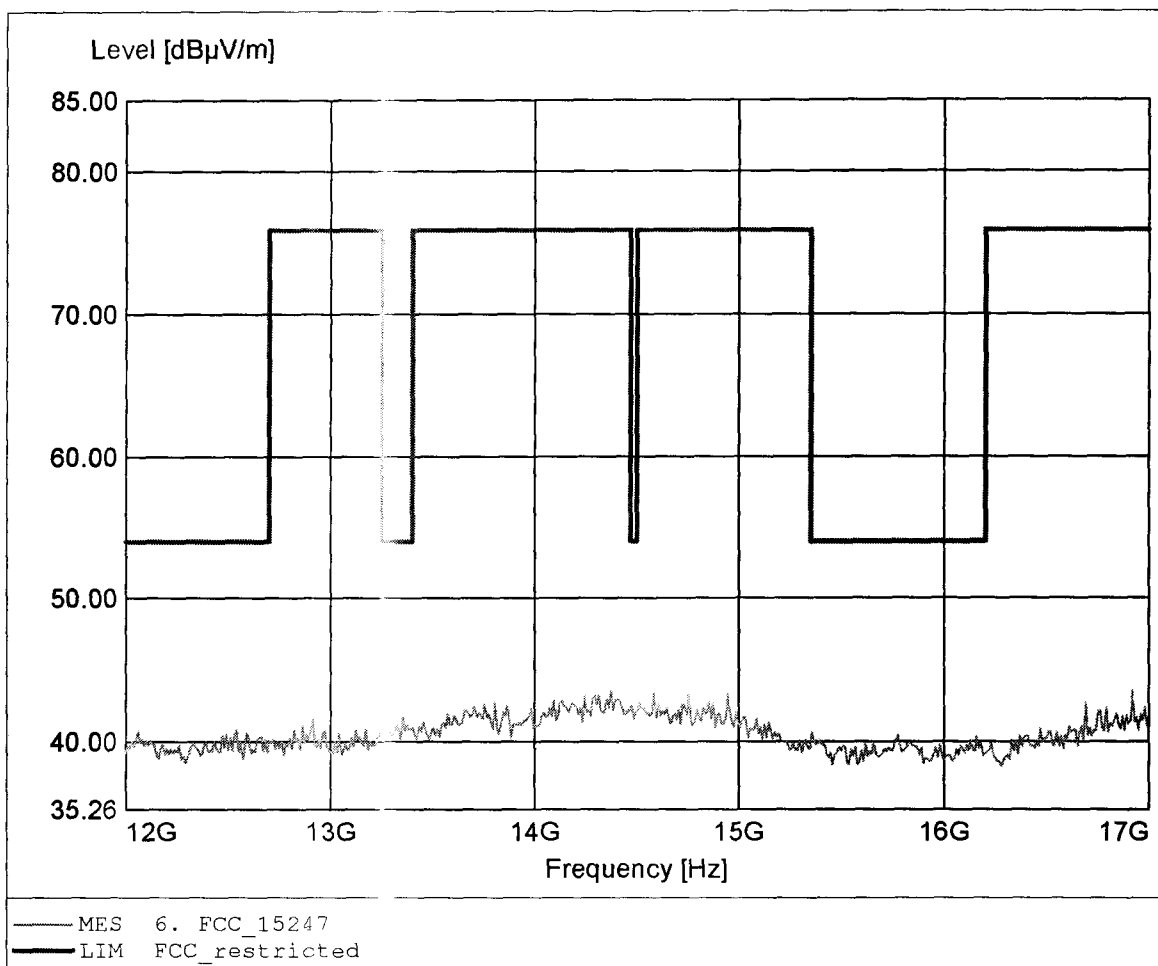

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300hs / 2402 MHz
Test Site / Operator: ETS / Mr. Treffke
Test Condition: 25°C / Unom: 3.6 V DC rechargeable battery
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.495GHz, Emax: 43.48dBuV/m, RBW: 1MHz

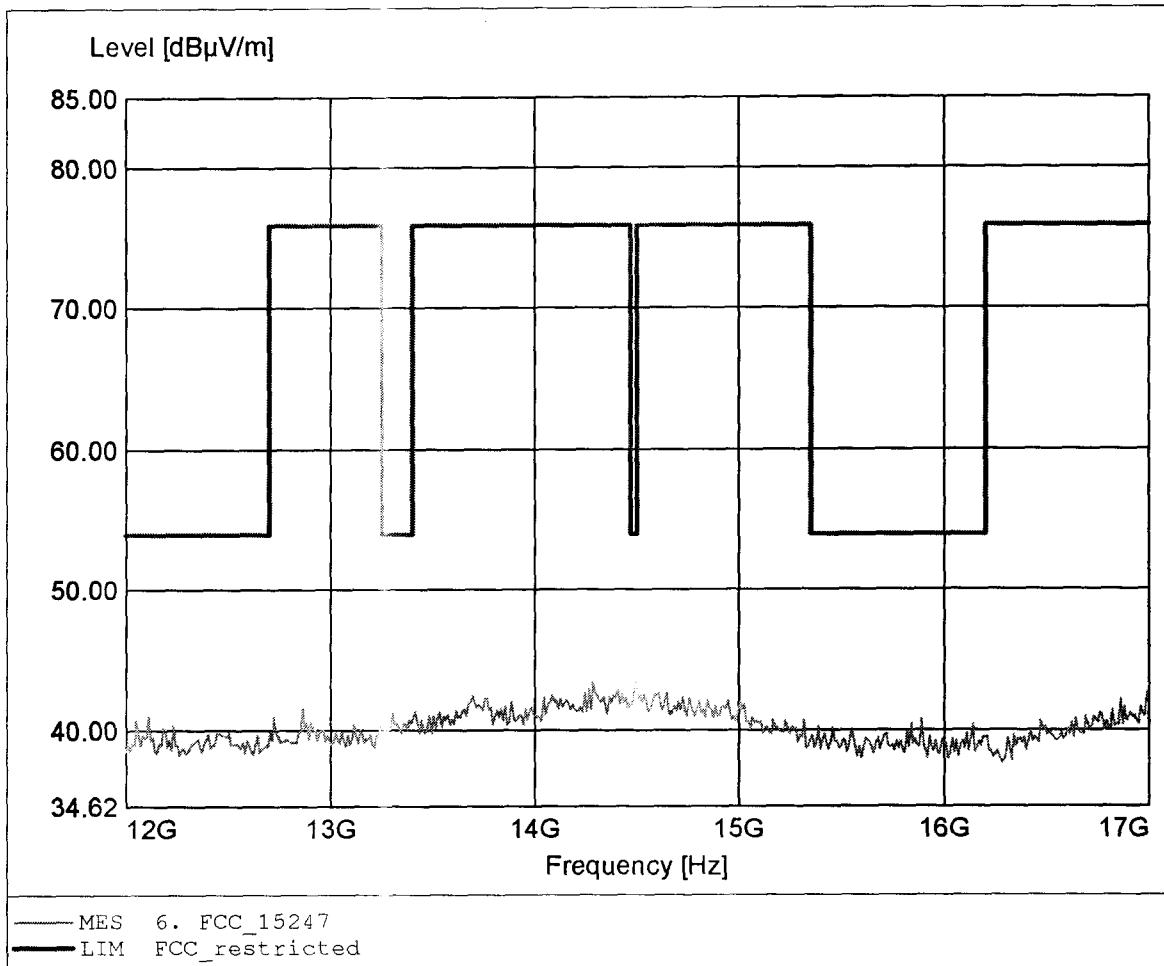

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300hs / 2402 MHz
Test Site / Operator: ETS / Mr. Treffke
Test Condition: 25°C / Unom: 3.6 V DC rechargeable battery
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.095GHz, Emax: 43.94dBµV/m, RBW: 1MHz

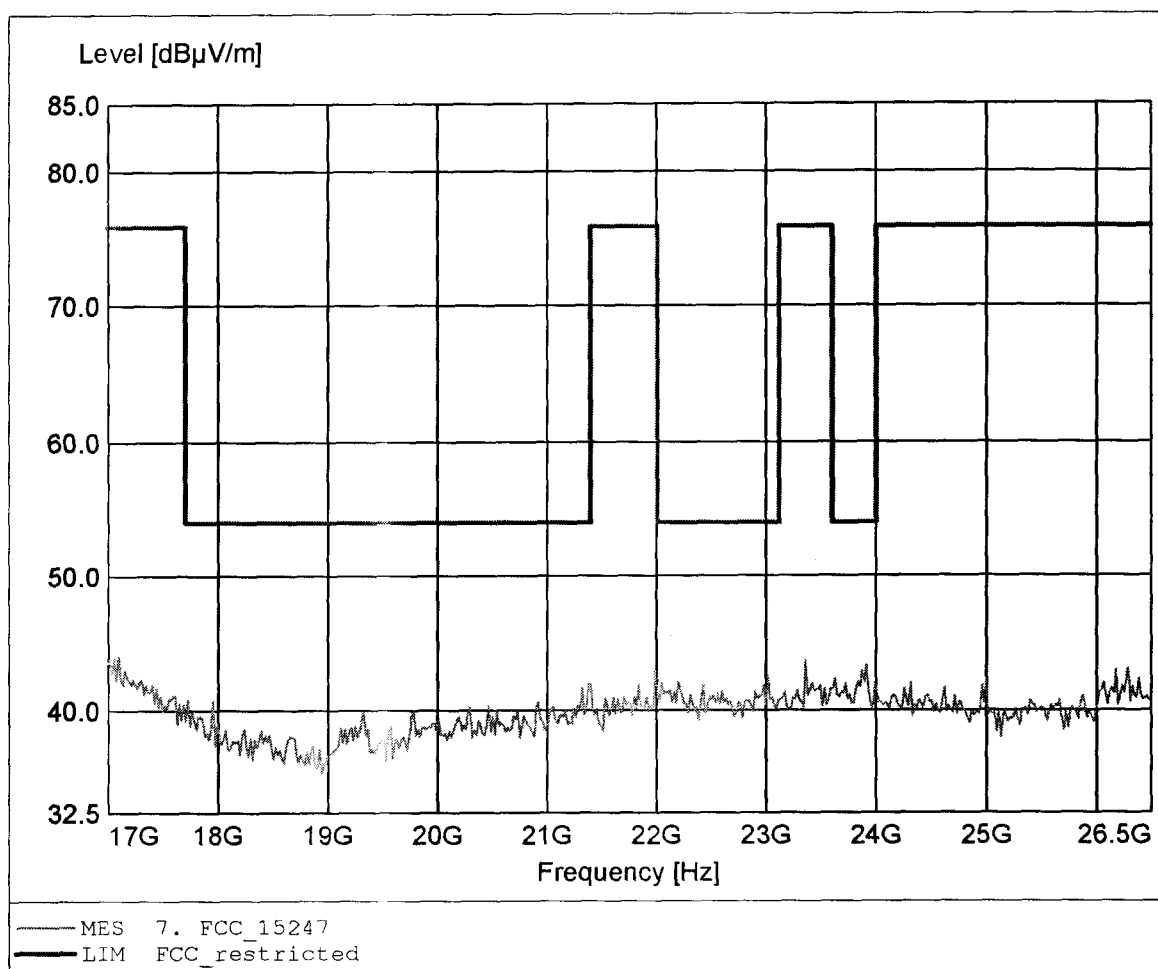

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300hs / 2402 MHz
Test Site / Operator: ETS / Mr. Treffke
Test Condition: 25°C / Unom: 3.6 V DC rechargeable battery
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.095GHz, Emax: 44.09dBuV/m, RBW: 1MHz

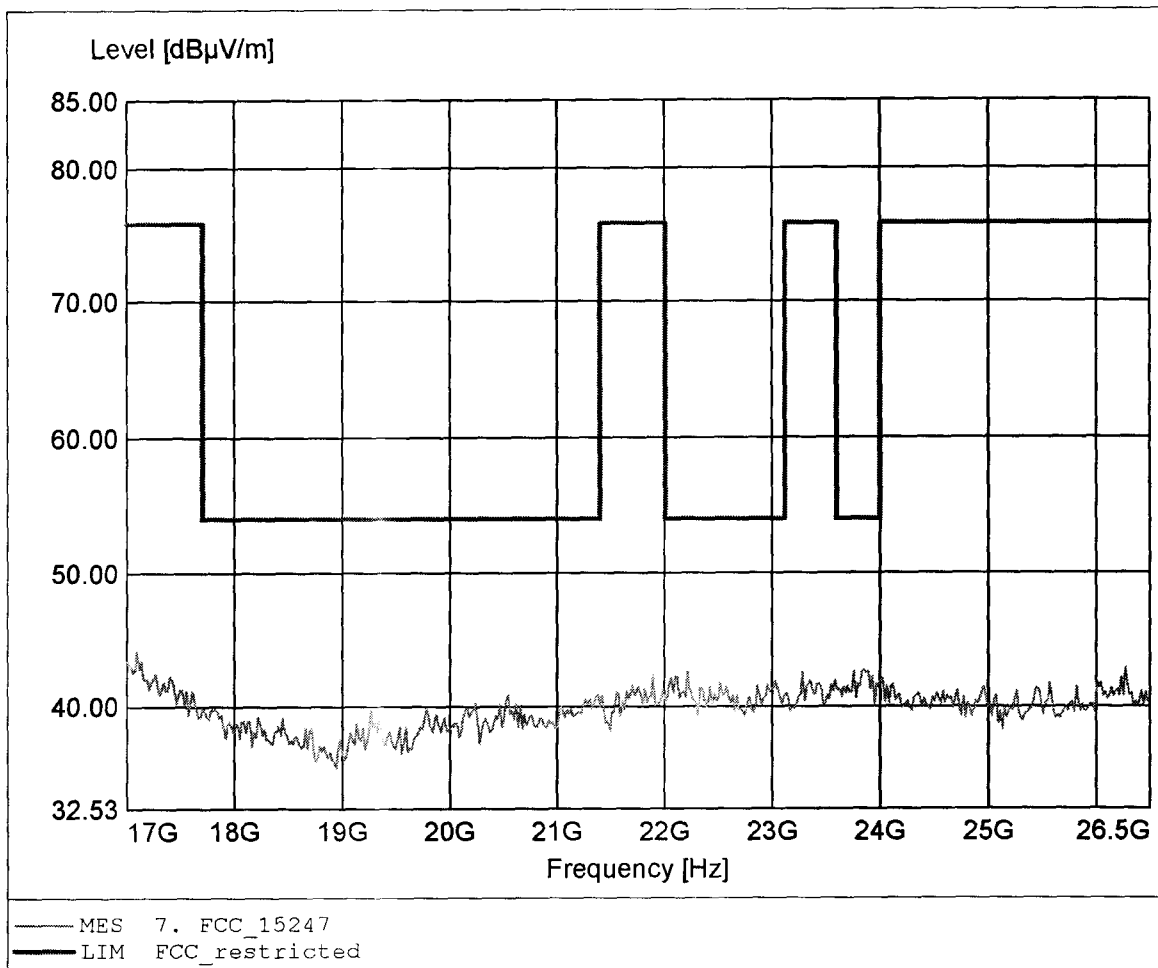

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300hs / 2441 MHz
Test Site / Operator: ETS / Mr. Treffke
Test Condition: 25°C / Unom: 3.6 V DC rechargeable battery
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 182.625MHz, Emax: 32.51dBµV/m, RBW: 100kHz

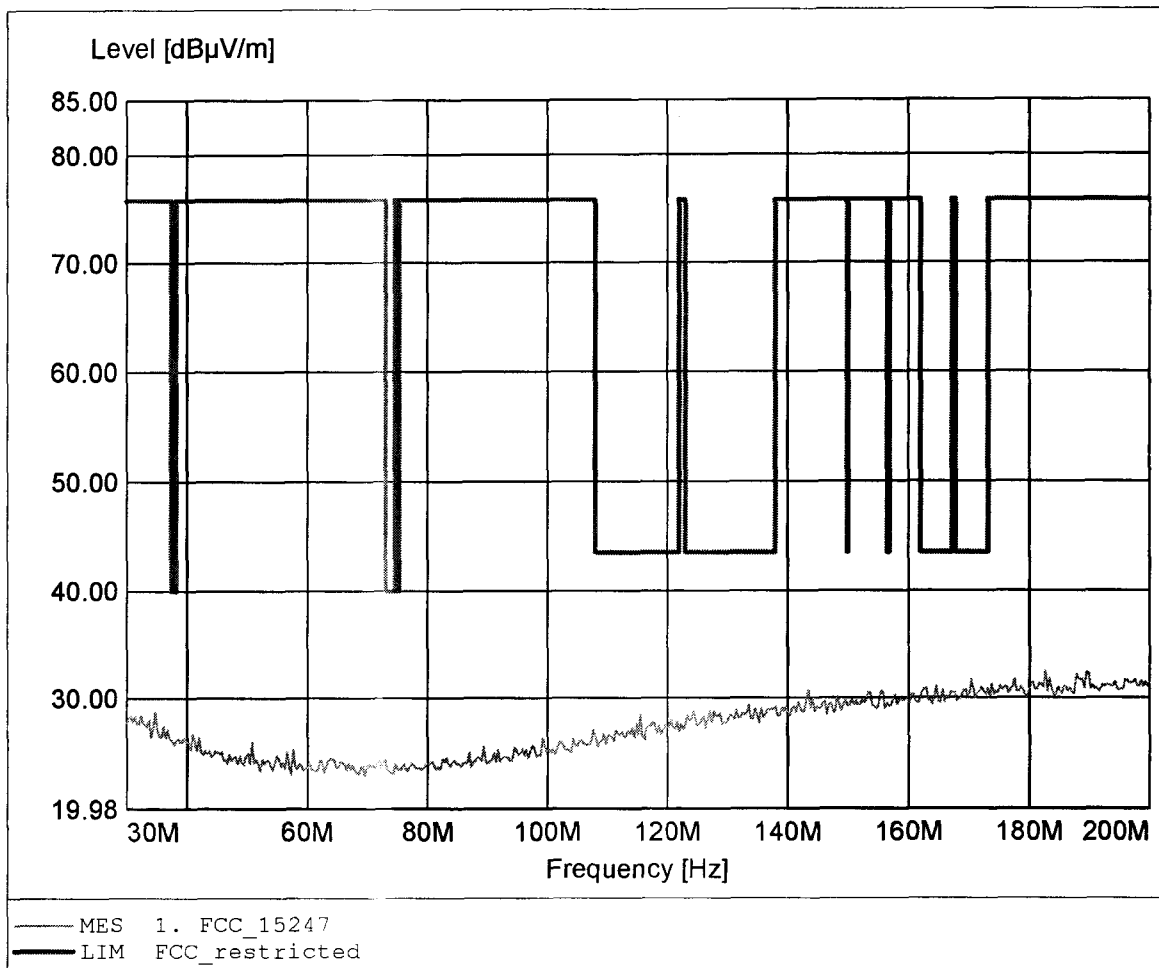

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300hs / 2441 MHz
Test Site / Operator: ETS / Mr. Treffke
Test Condition: 25°C / Unom: 3.6 V DC rechargeable battery
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 192.164MHz, Emax: 32.28dBµV/m, RBW: 100kHz

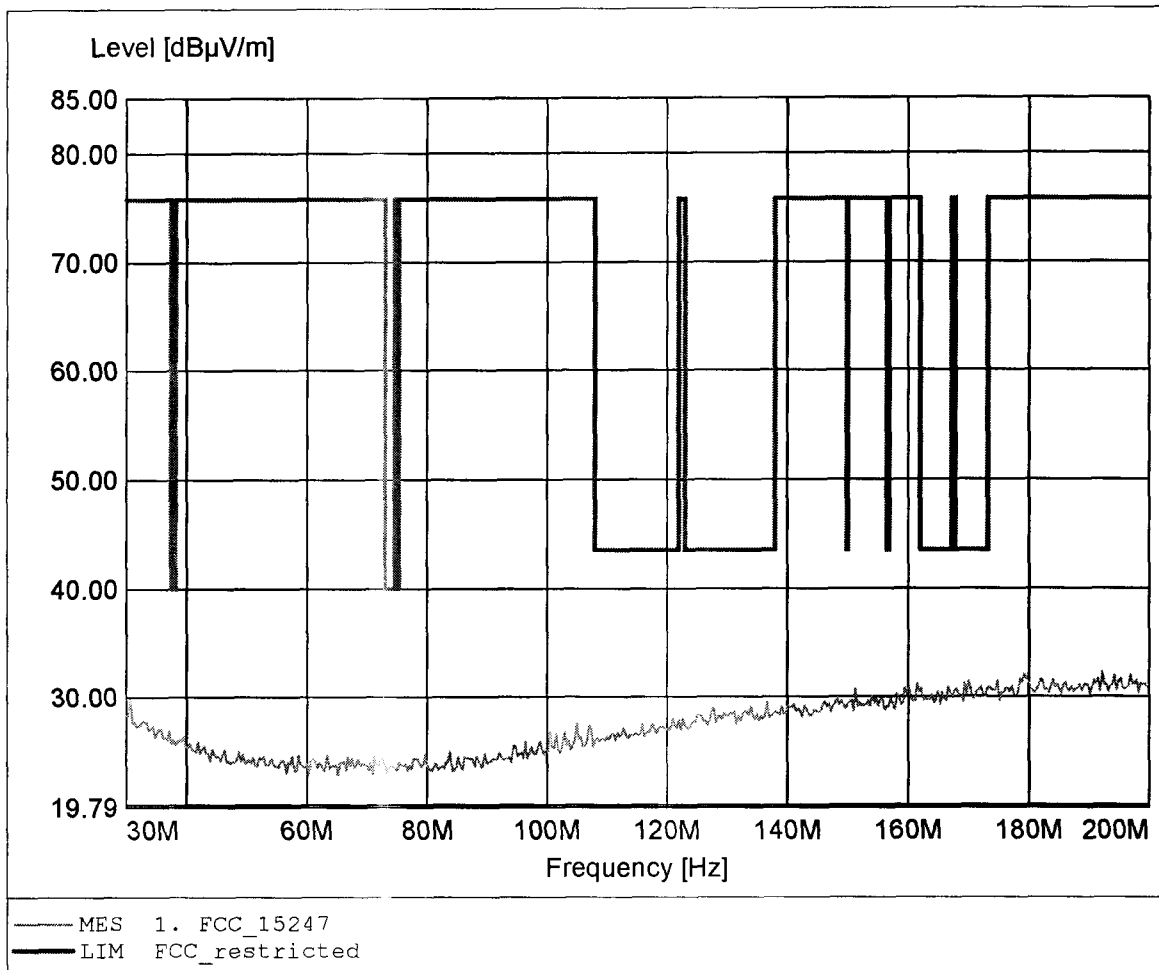

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300hs / 2441 MHz
Test Site / Operator: ETS / Mr. Treffke
Test Condition: 25°C / Unom: 3.6 V DC rechargeable battery
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 935.872MHz, Emax: 26.53dBµV/m, RBW: 100kHz

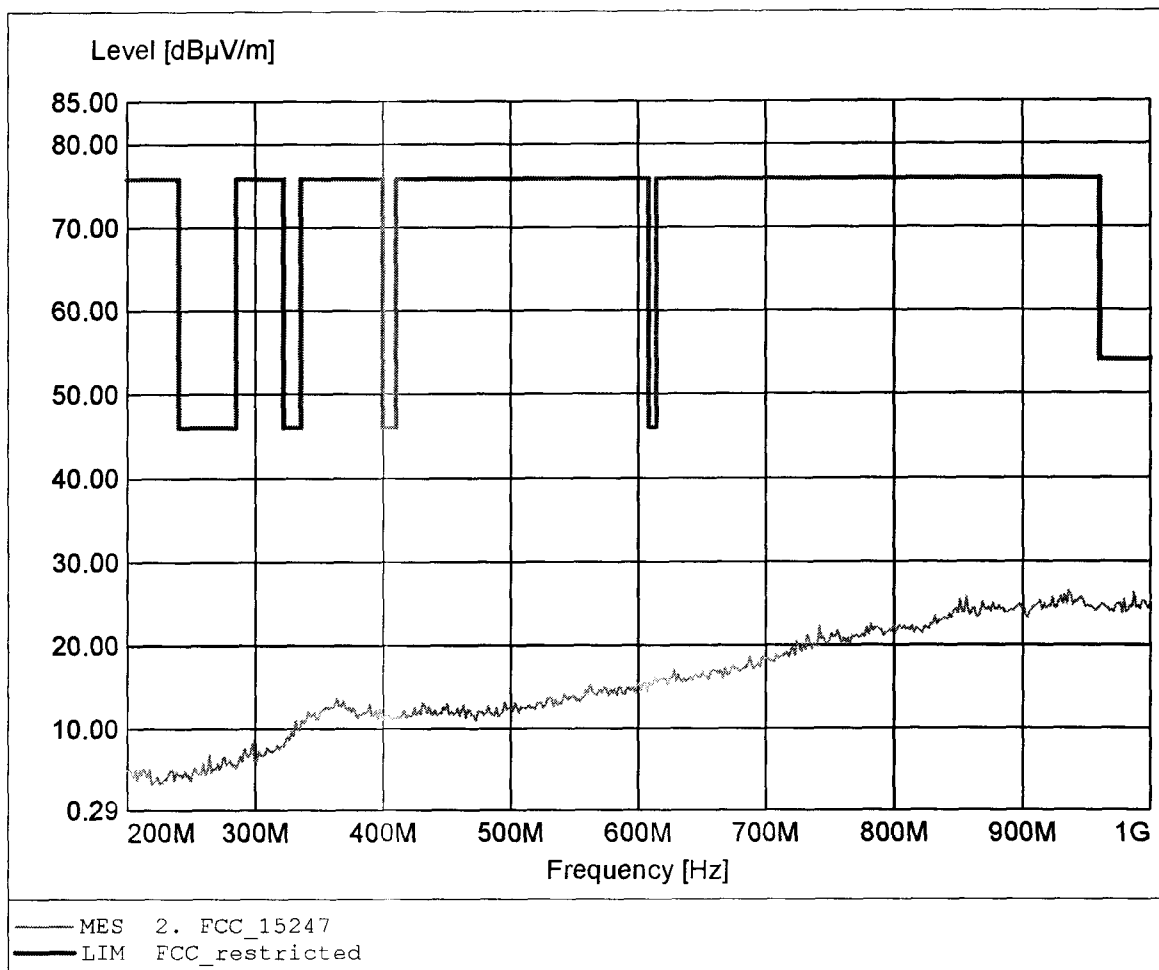

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300hs / 2441 MHz
Test Site / Operator: ETS / Mr. Treffke
Test Condition: 25°C / Unom: 3.6 V DC rechargeable battery
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 892.585MHz, Emax: 25.82dBµV/m, RBW: 100kHz

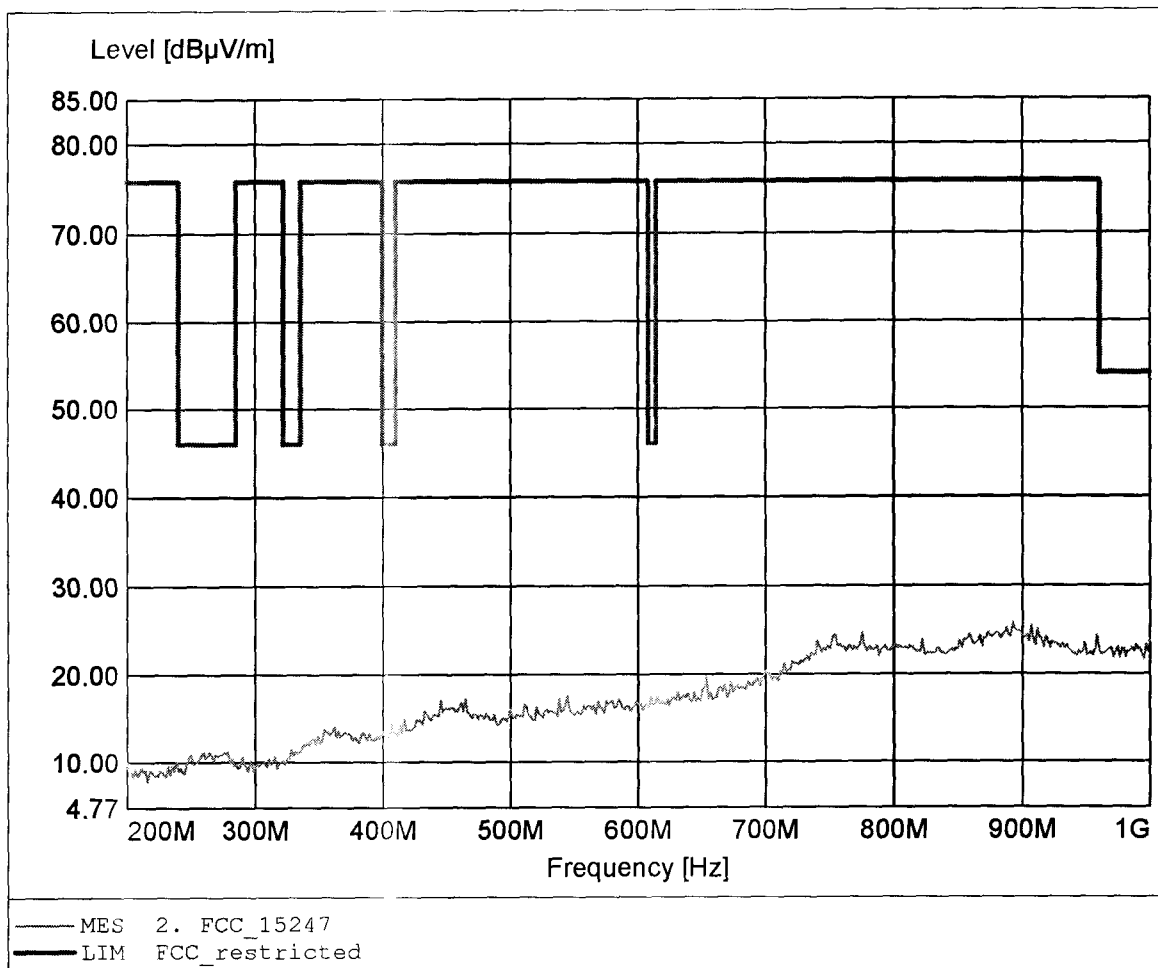

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300hs / 2441 MHz
Test Site / Operator: ETS / Mr. Treffke
Test Condition: 25°C / Unom: 3.6 V DC rechargeable battery
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.884GHz, Emax: 49.90dBµV/m, RBW: 1MHz

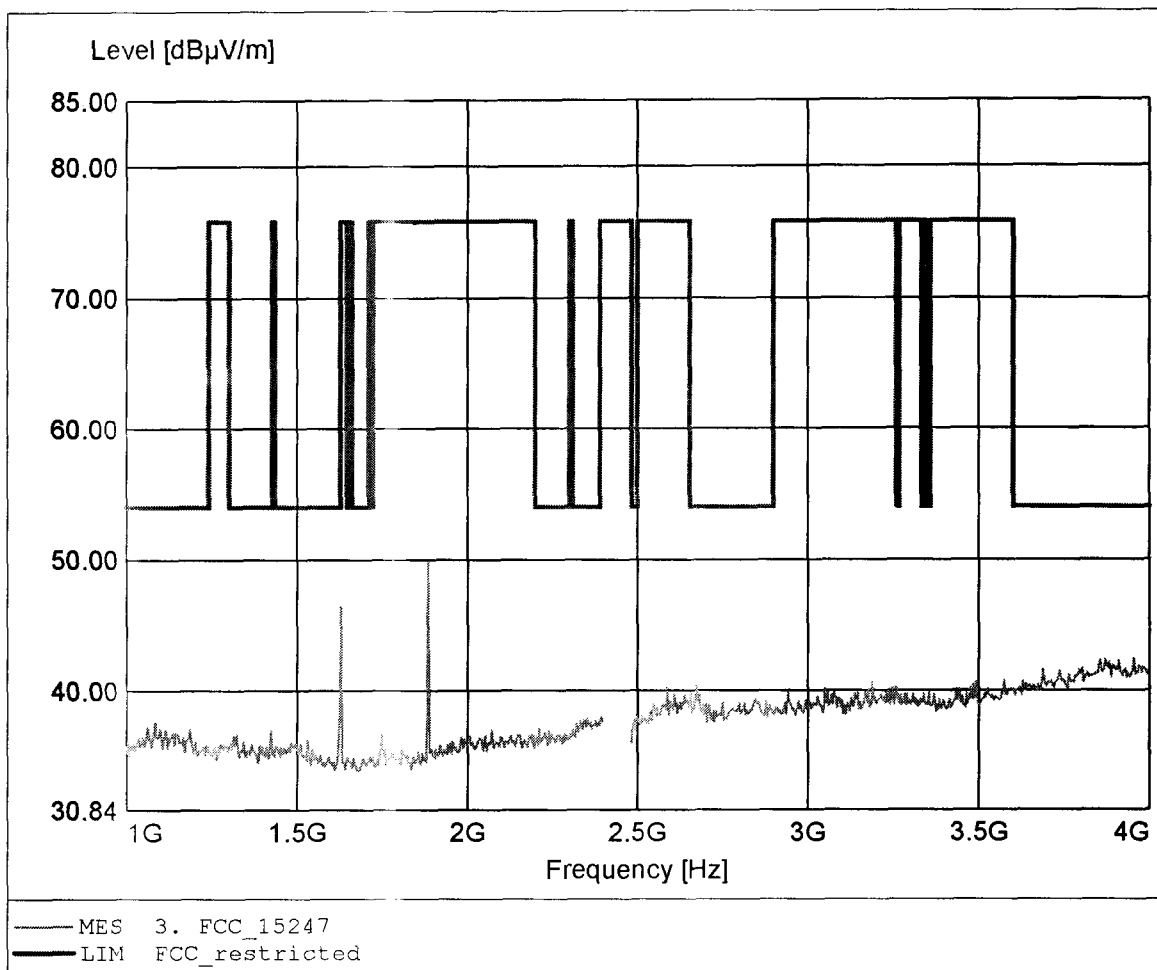

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300hs / 2441 MHz
Test Site / Operator: ETS / Mr. Treffke
Test Condition: 25°C / Unom: 3.6 V DC rechargeable battery
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.884GHz, Emax: 50.15dBµV/m, RBW: 1MHz

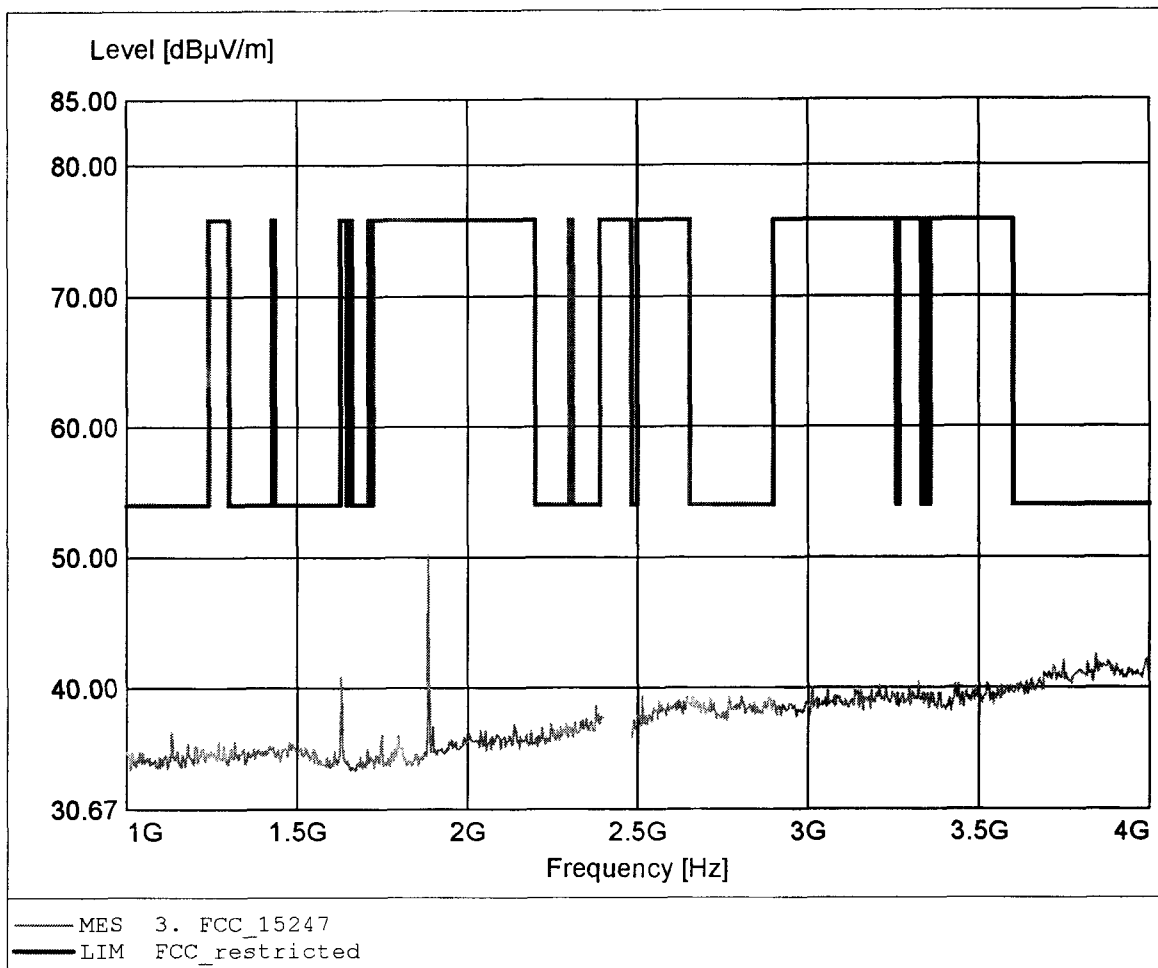

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300hs / 2441 MHz
Test Site / Operator: ETS / Mr. Treffke
Test Condition: 25°C / Unom: 3.6 V DC rechargeable battery
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 49.94dBµV/m, REW: 1MHz

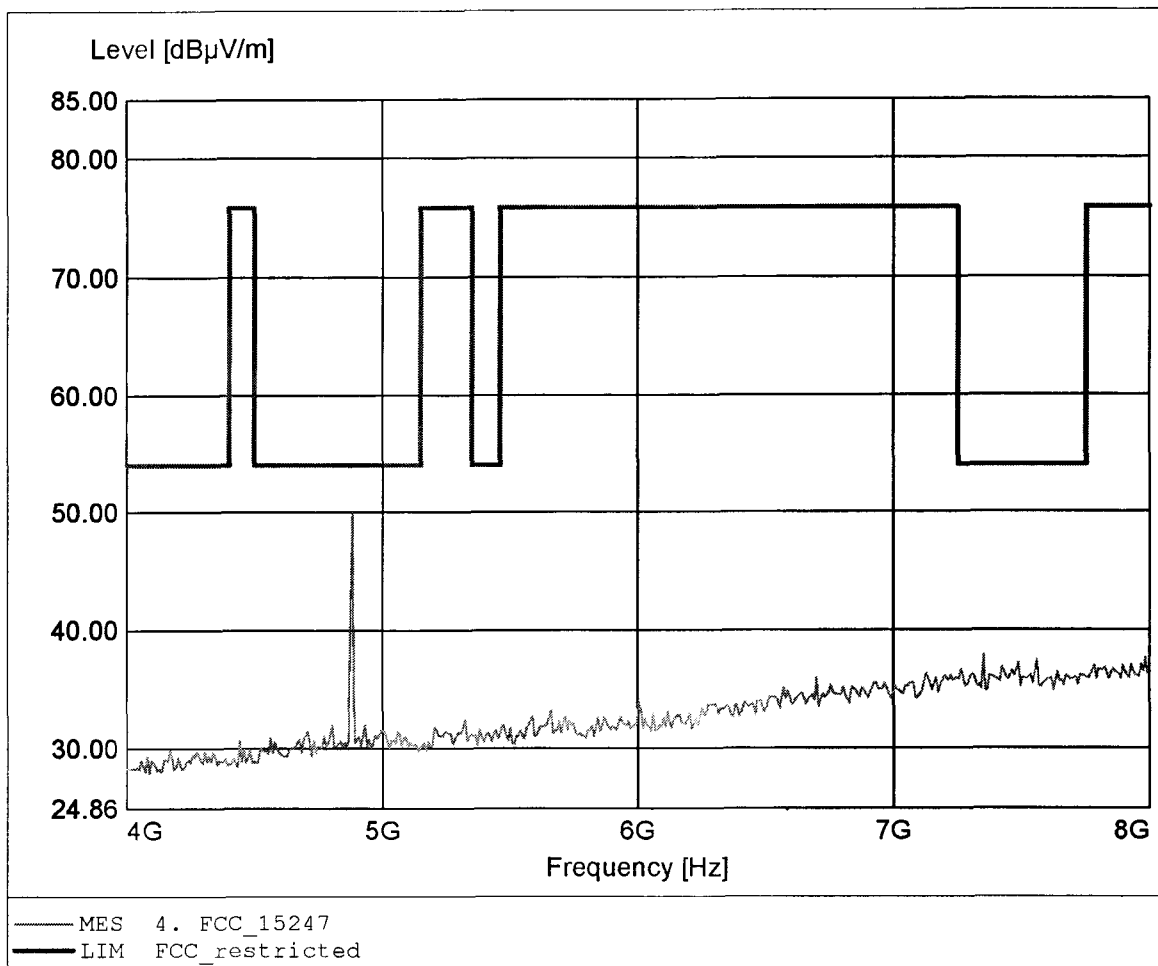

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300hs / 2441 MHz
Test Site / Operator: ETS / Mr. Treffke
Test Condition: 25°C / Unom: 3.6 V DC rechargeable battery
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 45.91dBµV/m, RBW: 1MHz

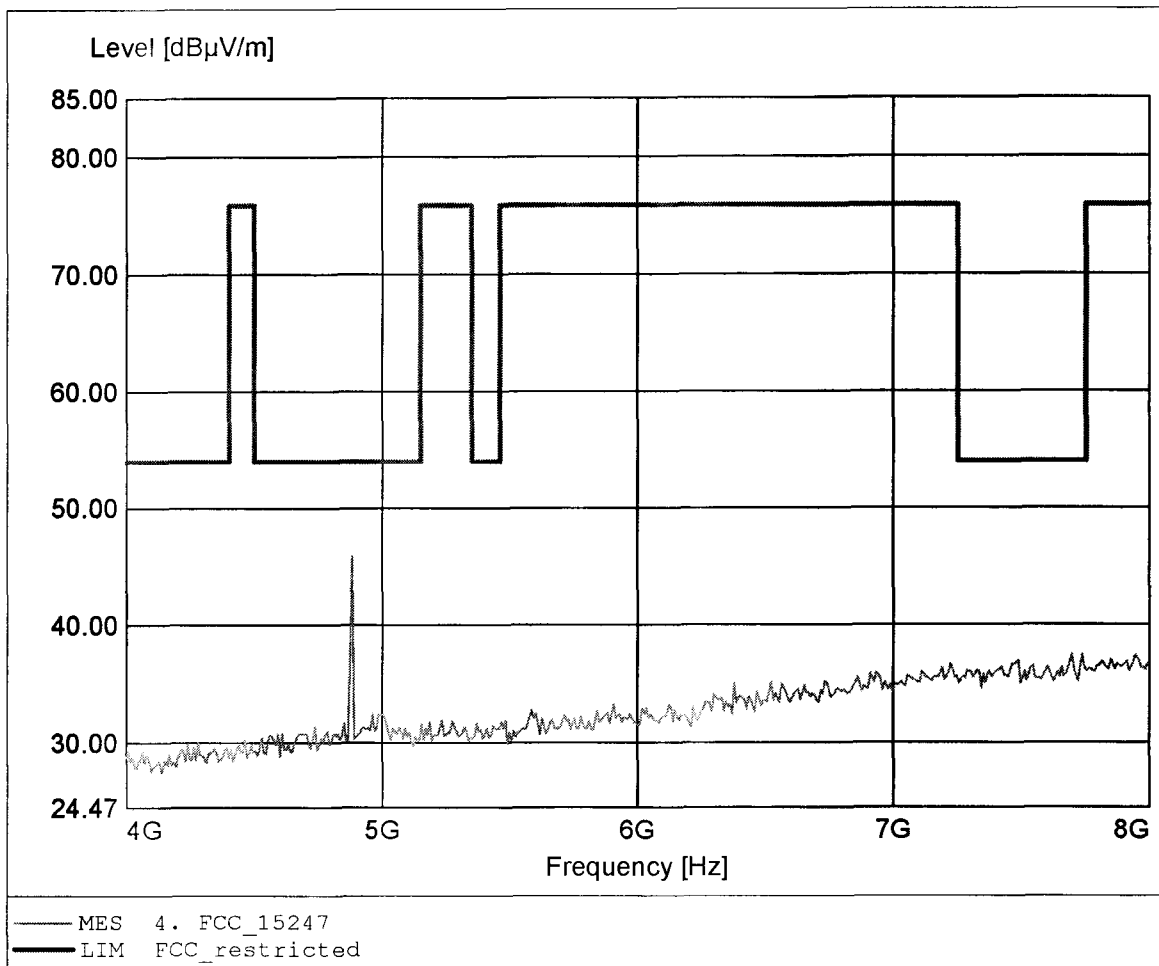

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300hs / 2441 MHz
Test Site / Operator: ETS / Mr. Treffke
Test Condition: 25°C / Unom: 3.6 V DC rechargeable battery
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.206GHz, Emax: 41.80dBuV/m, RBW: 1MHz

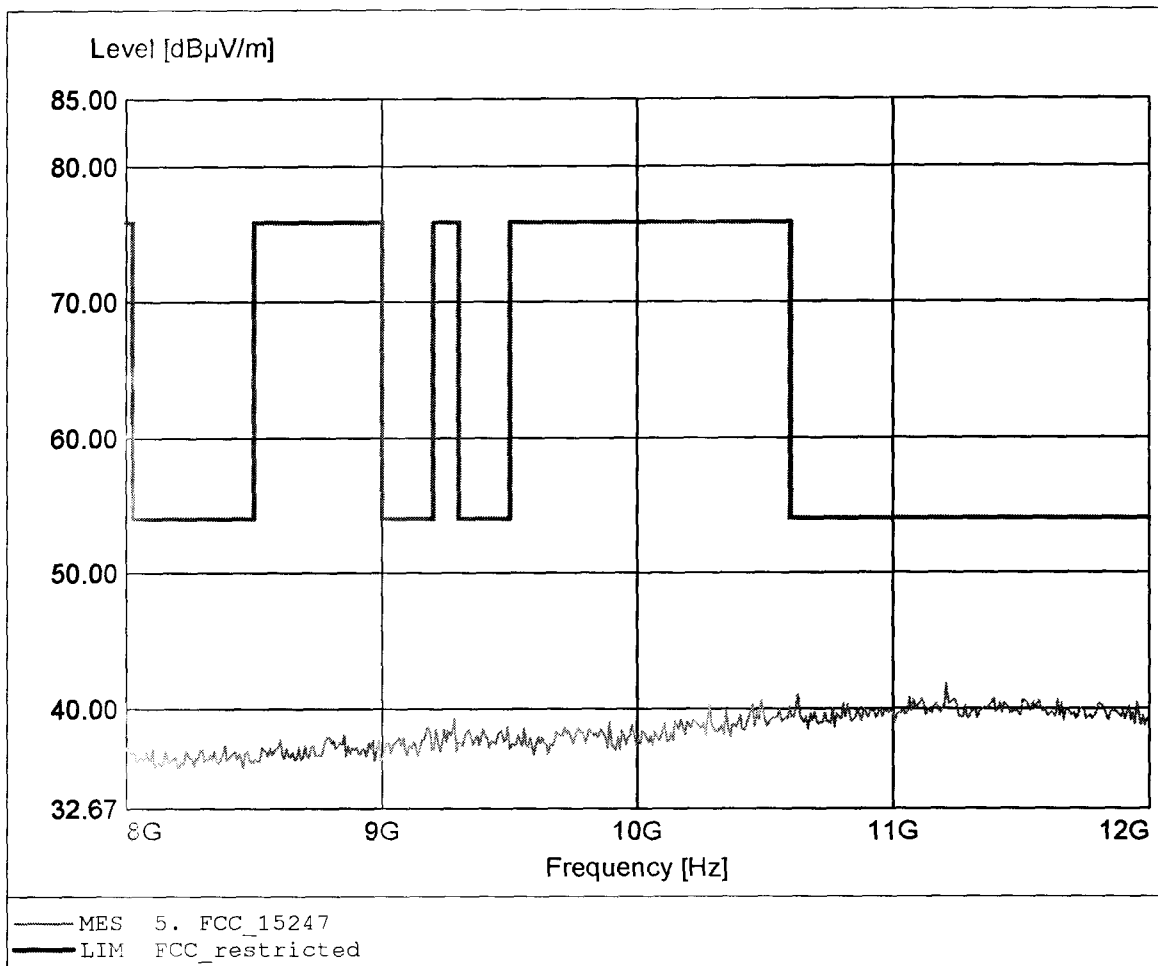

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300hs / 2441 MHz
Test Site / Operator: ETS / Mr. Treffke
Test Condition: 25°C / Unom: 3.6 V DC rechargeable battery
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.150GHz, Emax: 41.21dBµV/m, RBW: 1MHz

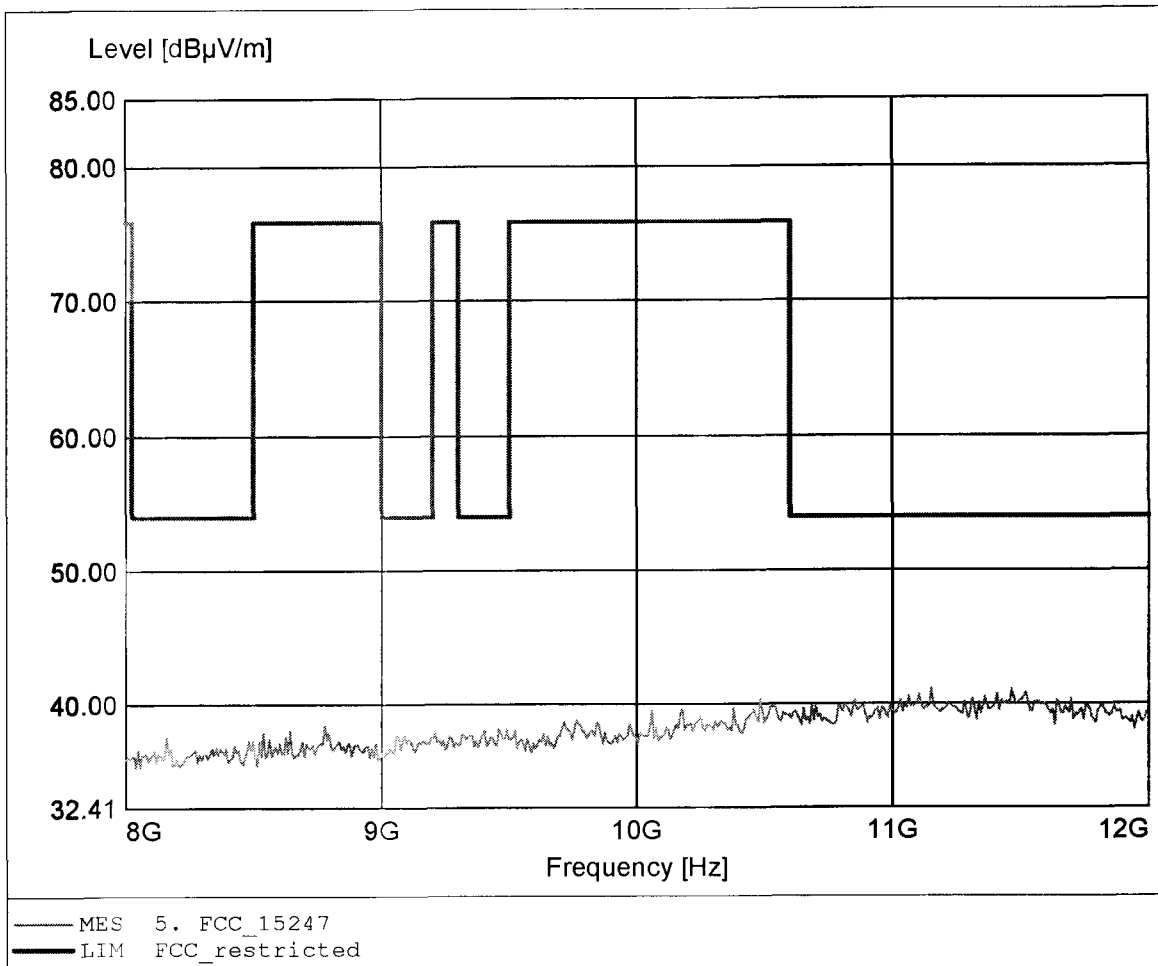

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300hs / 2441 MHz
Test Site / Operator: ETS / Mr. Treffke
Test Condition: 25°C / Unom: 3.6 V DC rechargeable battery
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.395GHz, Emax: 44.27dBµV/m, RBW: 1MHz

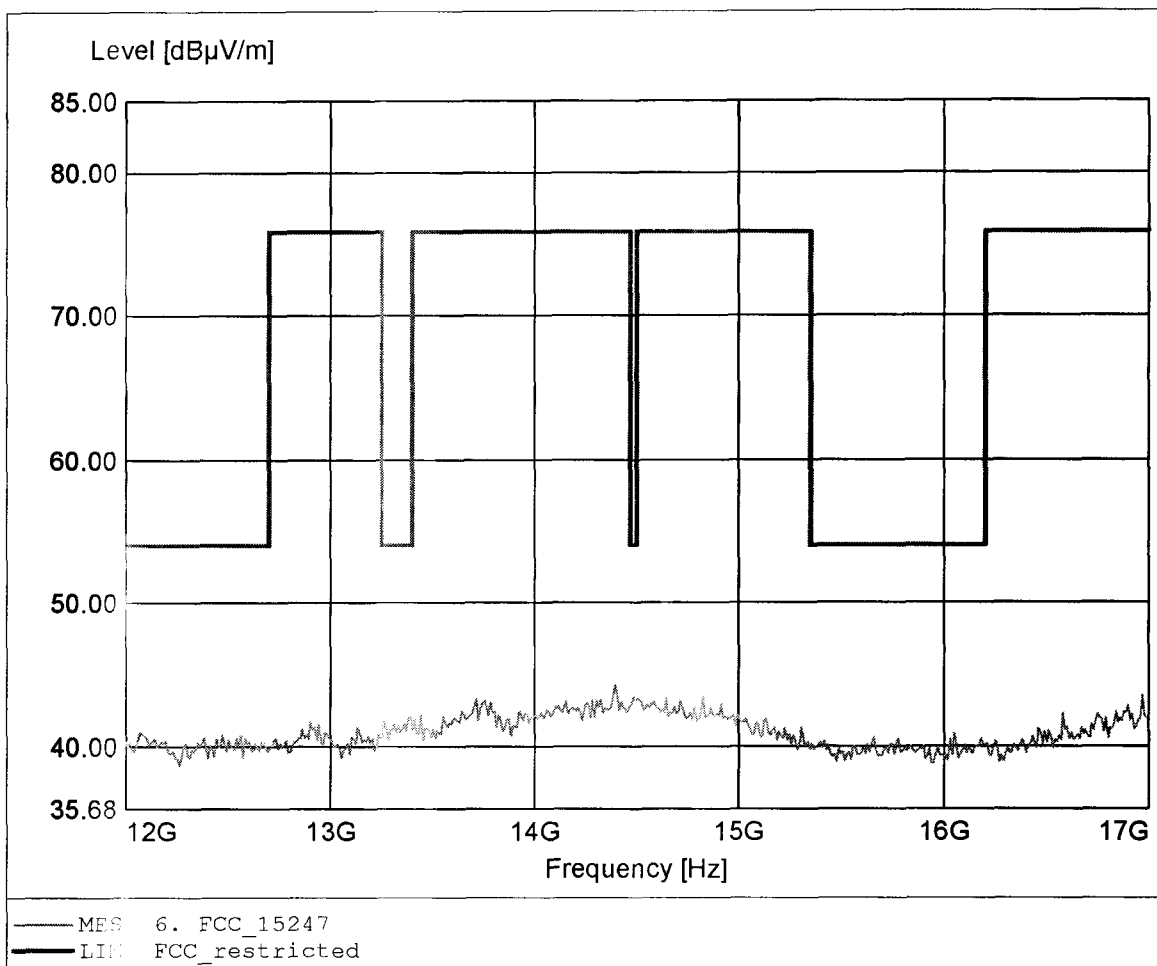

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300hs / 2441 MHz
Test Site / Operator: ETS / Mr. Treffke
Test Condition: 25°C / Unom: 3.6 V DC rechargeable battery
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.325GHz, Emax: 43.90dBµV/m, RBW: 1MHz

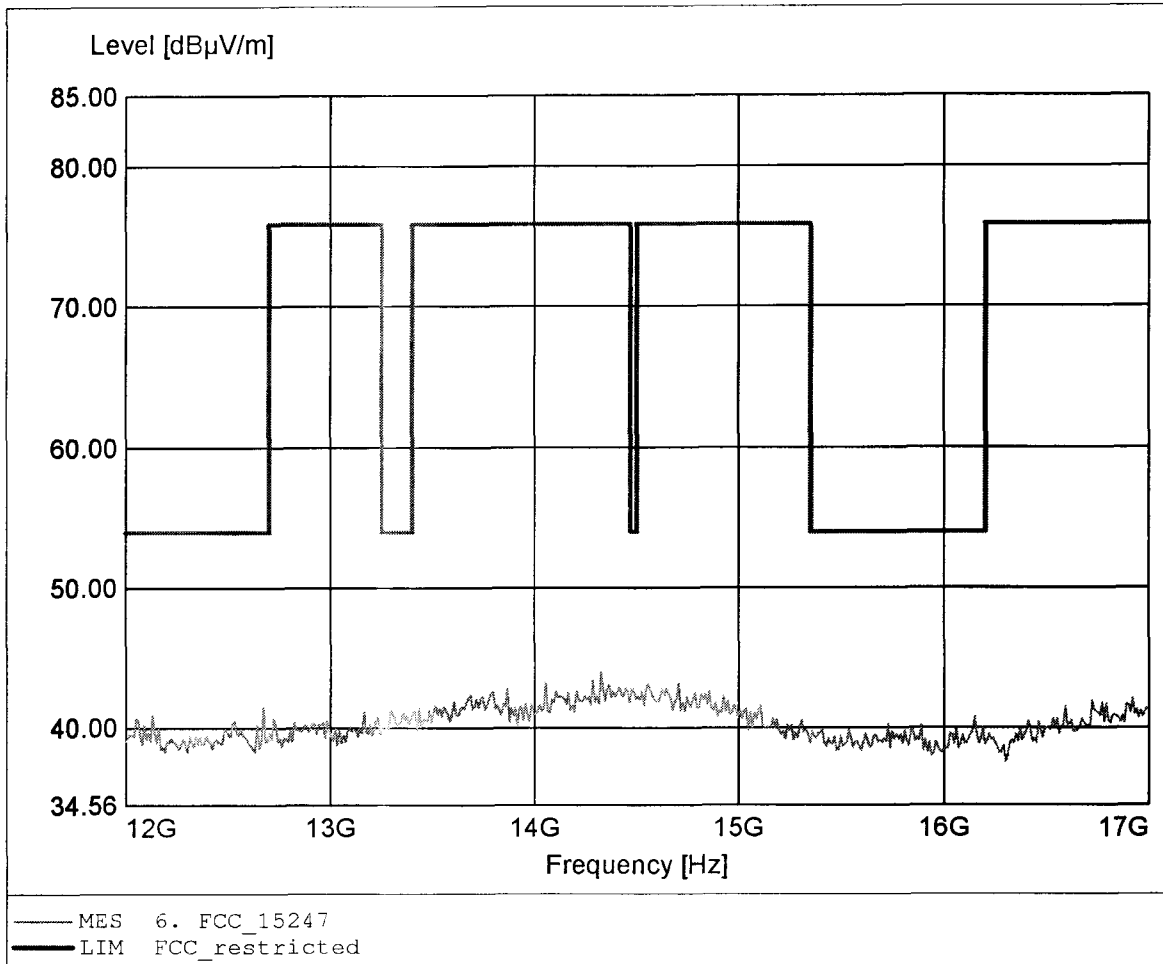

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300hs / 2441 MHz
Test Site / Operator: ETS / Mr. Treffke
Test Condition: 25°C / Unom: 3.6 V DC rechargeable battery
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 43.69dBµV/m, RBW: 1MHz

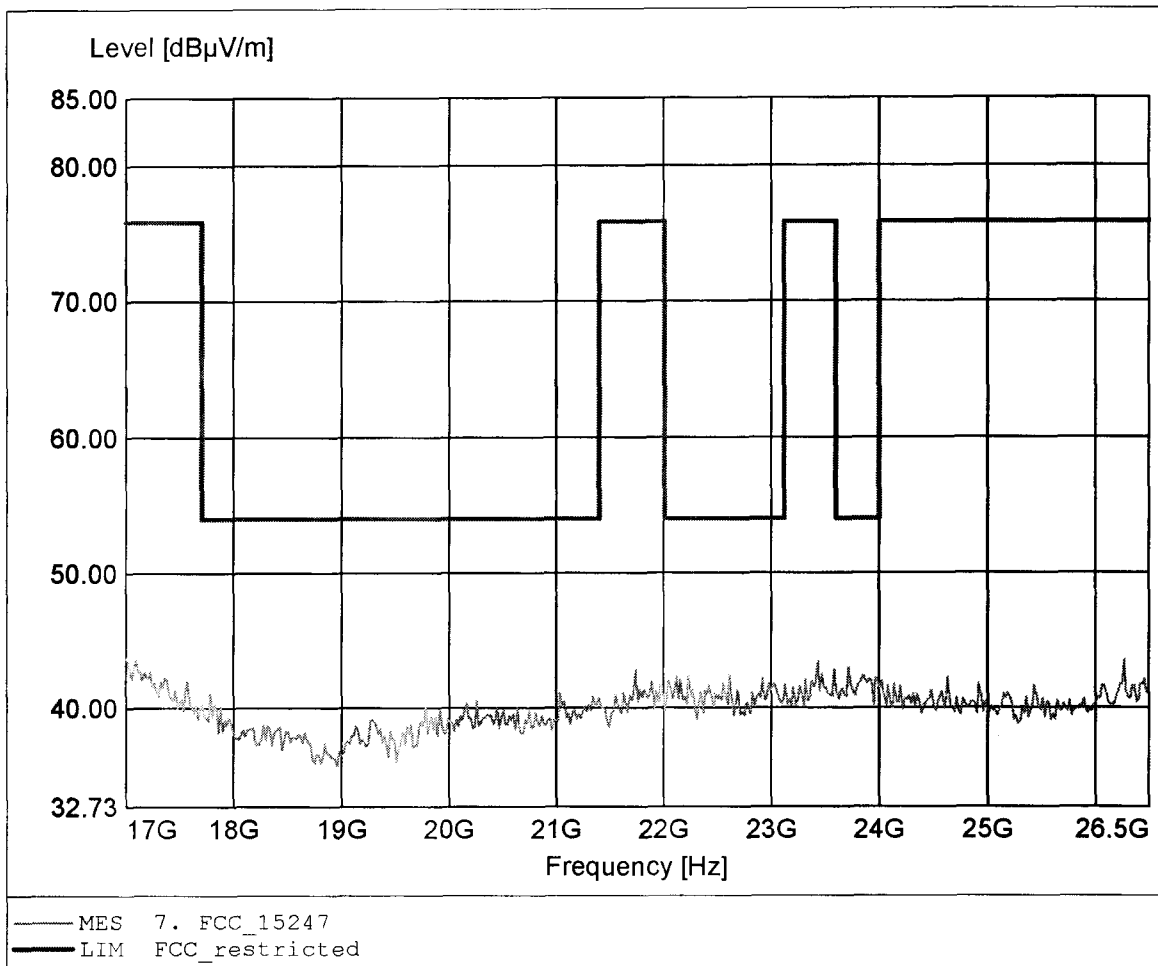

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300hs / 2441 MHz
Test Site / Operator: ETS / Mr. Treffke
Test Condition: 25°C / Unom: 3.6 V DC rechargeable battery
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.076GHz, Emax: 43.33dBµV/m, RBW: 1MHz

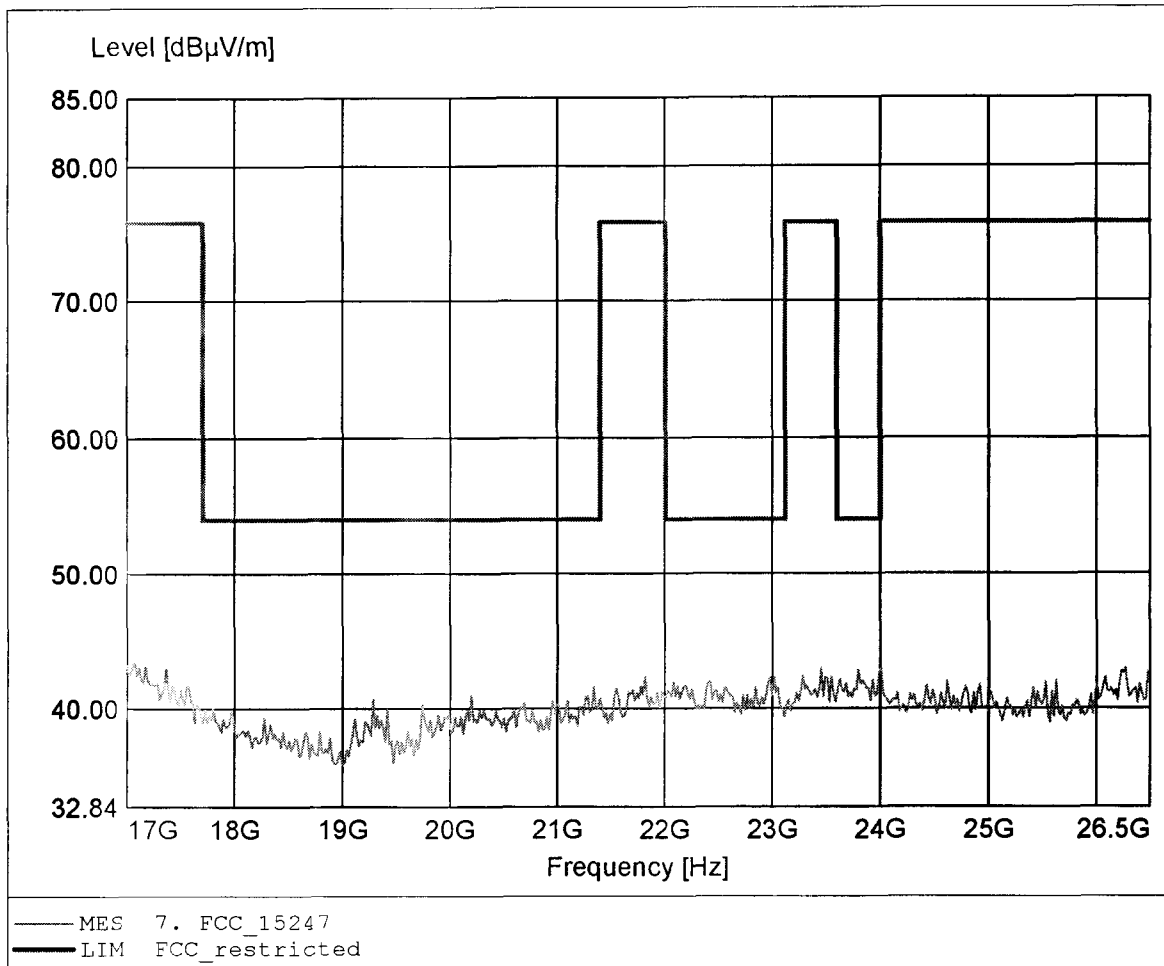

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300hs / 2480 MHz
Test Site / Operator: ETS / Mr. Treffke
Test Condition: 25°C / Unom: 3.6 V DC rechargeable battery
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 179.559MHz, Emax: 32.78dBµV/m, RBW: 100kHz

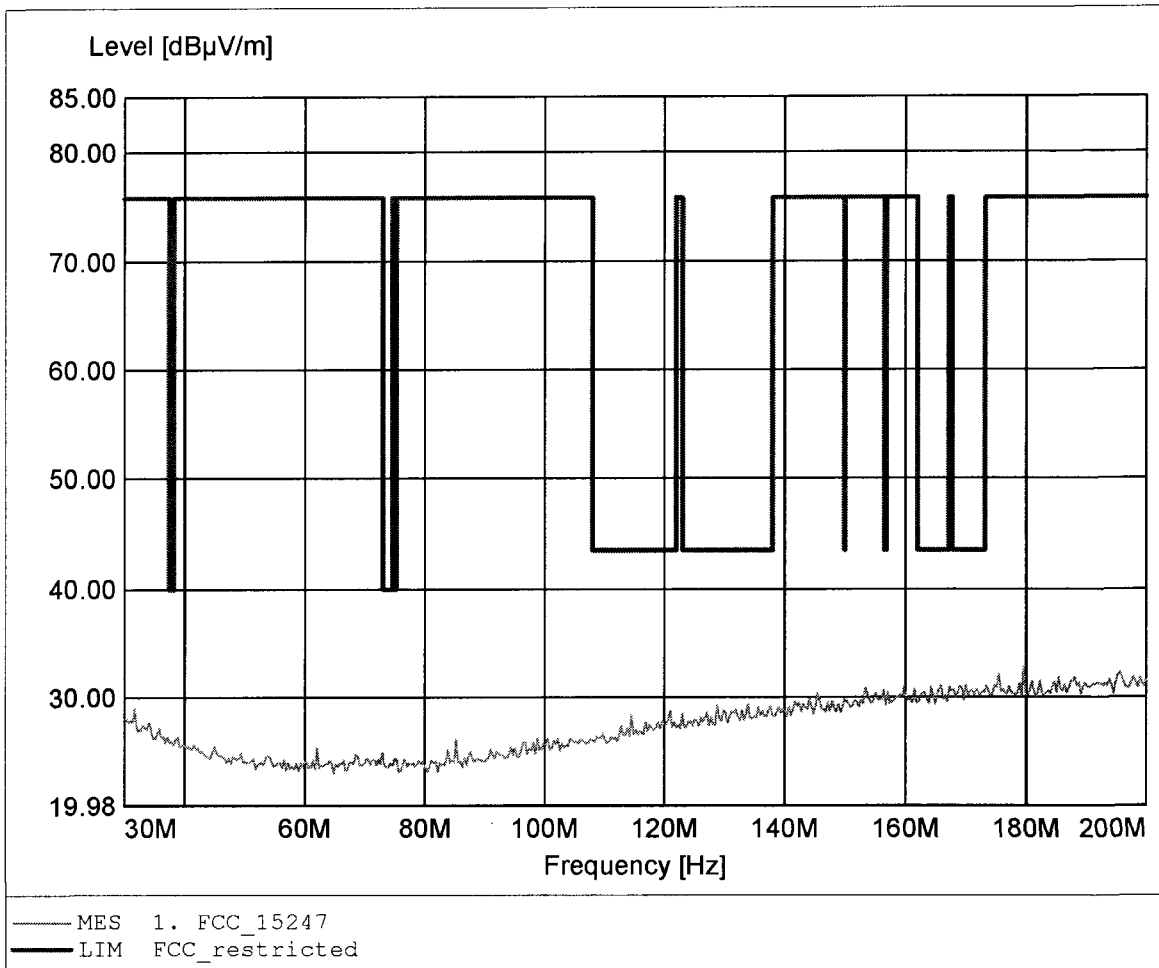

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300hs / 2480 MHz
Test Site / Operator: ETS / Mr. Treffke
Test Condition: 25°C / Unom: 3.6 V DC rechargeable battery
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 191.824MHz, Emax: 32.36dBµV/m, RBW: 100kHz

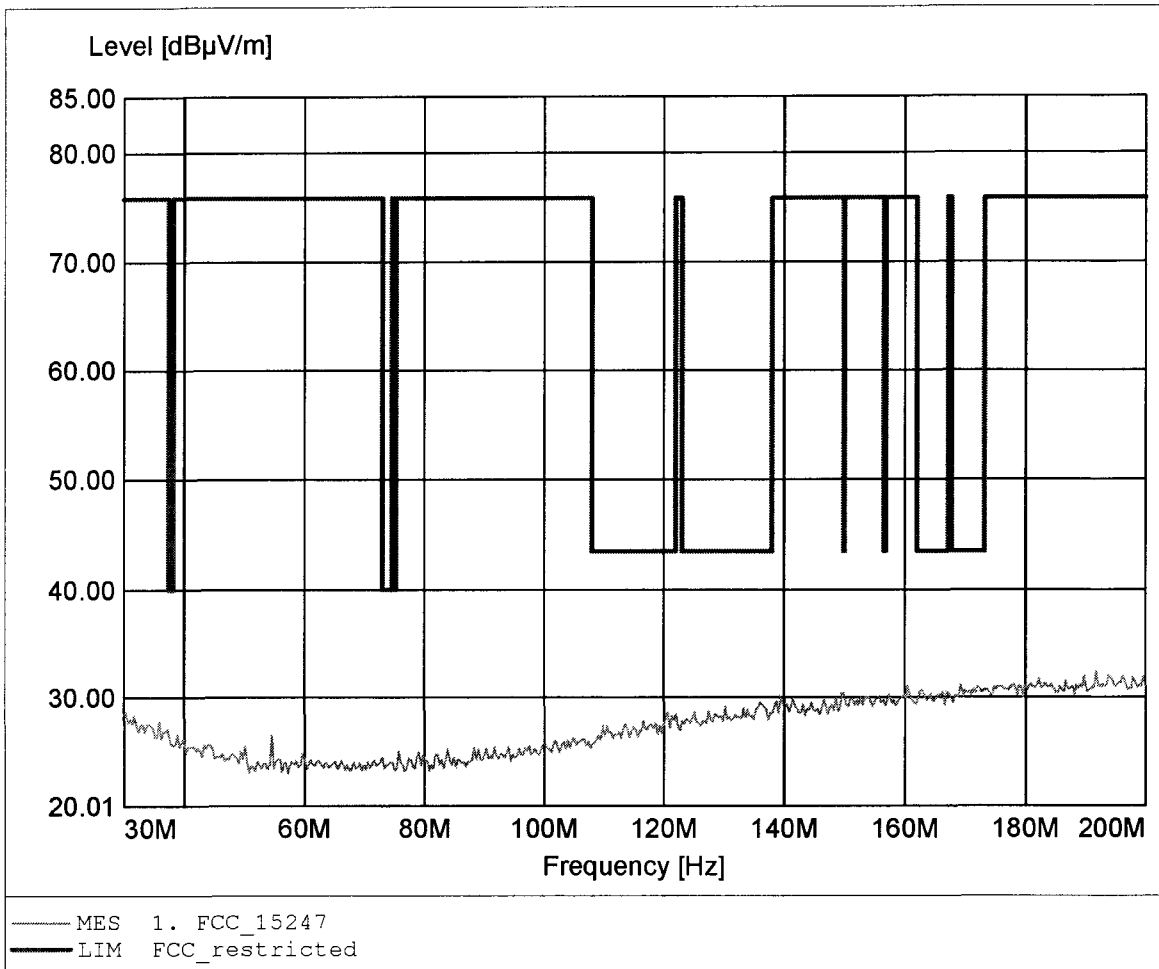

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300hs / 2480 MHz
Test Site / Operator: ETS / Mr. Treffke
Test Condition: 25°C / Unom: 3.6 V DC rechargeable battery
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 876.553MHz, Emax: 27.59dBµV/m, RBW: 100kHz

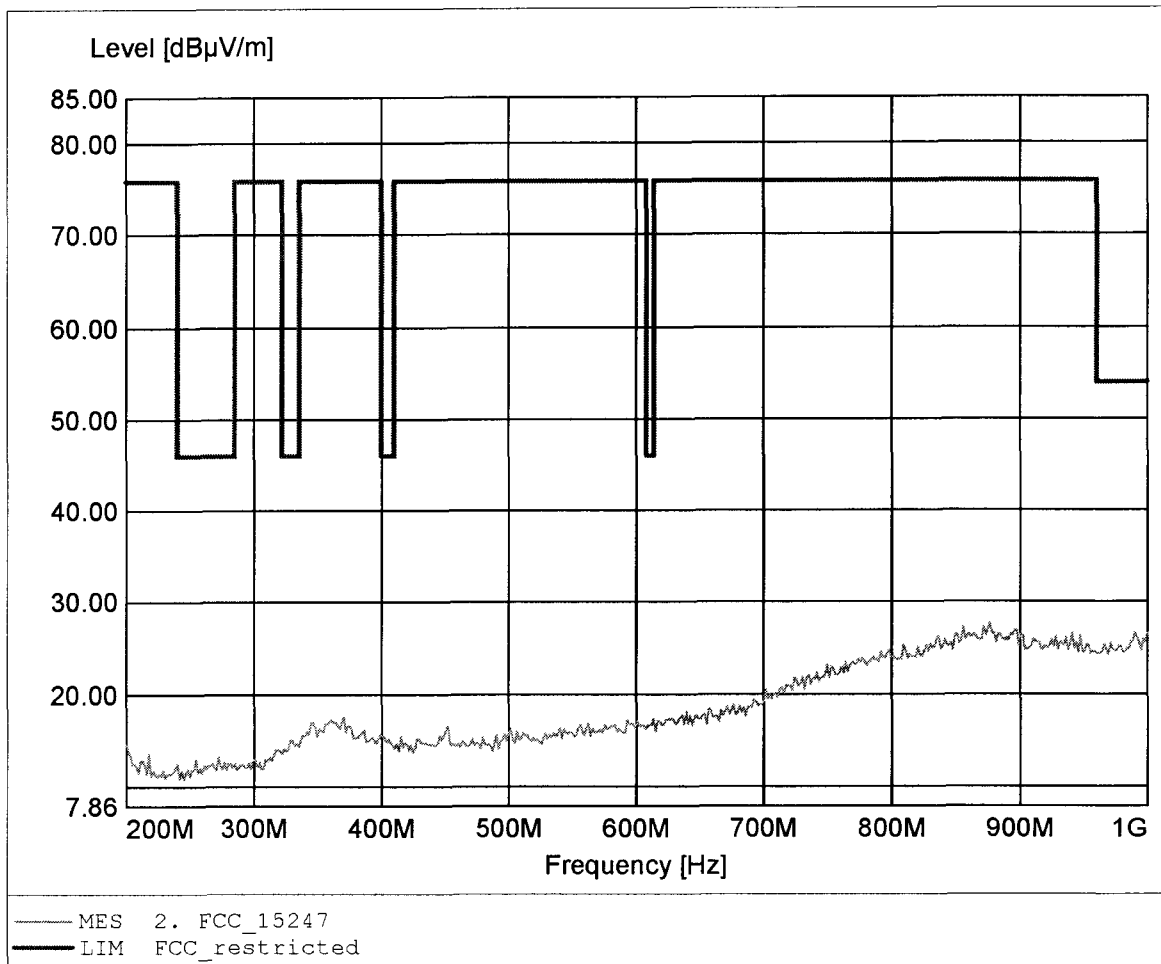

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300hs / 2480 MHz
Test Site / Operator: ETS / Mr. Treffke
Test Condition: 25°C / Unom: 3.6 V DC rechargeable battery
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 895.792MHz, Emax: 26.55dBµV/m, RBW: 100kHz

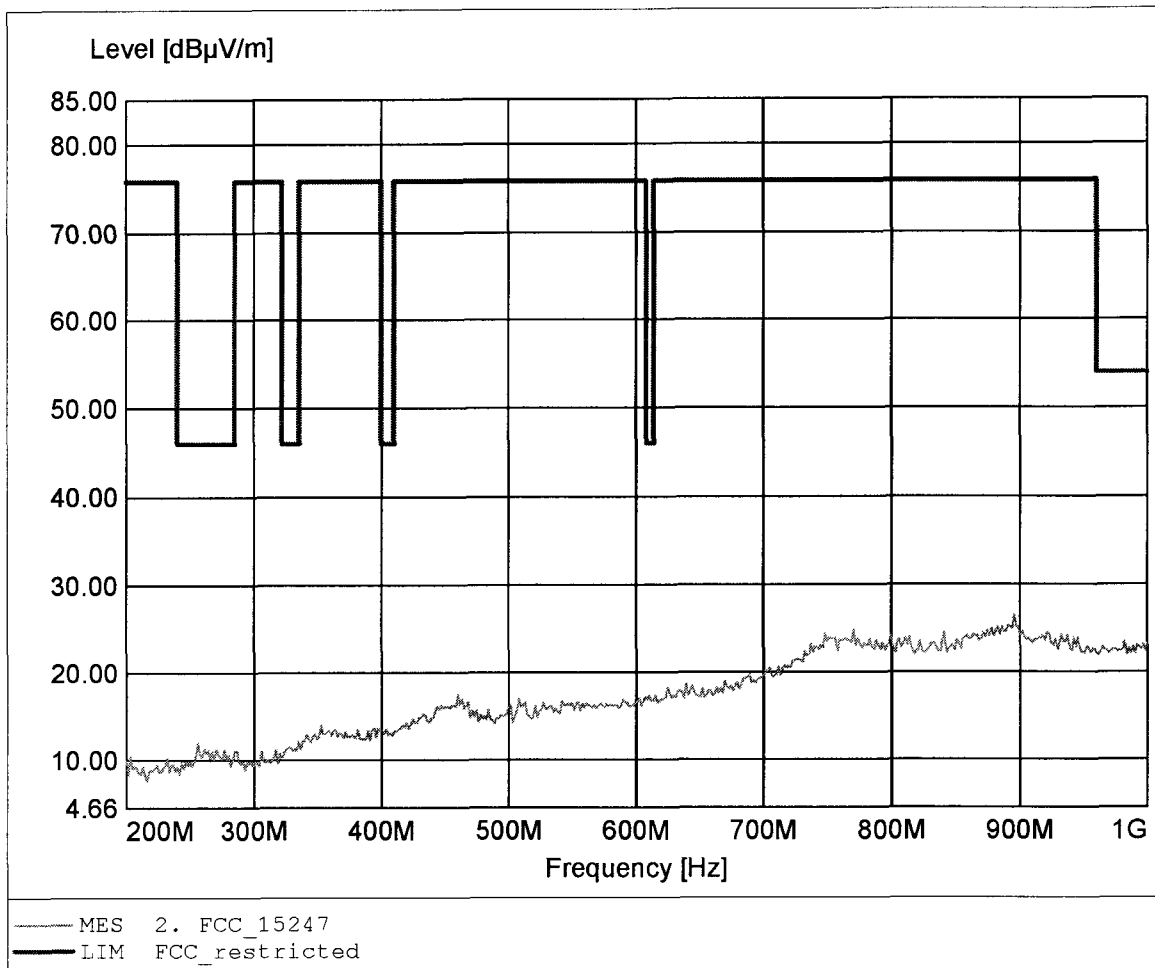

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300hs / 2480 MHz
Test Site / Operator: ETS / Mr. Treffke
Test Condition: 25°C / Unom: 3.6 V DC rechargeable battery
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.884GHz, Emax: 50.32dBµV/m, RBW: 1MHz

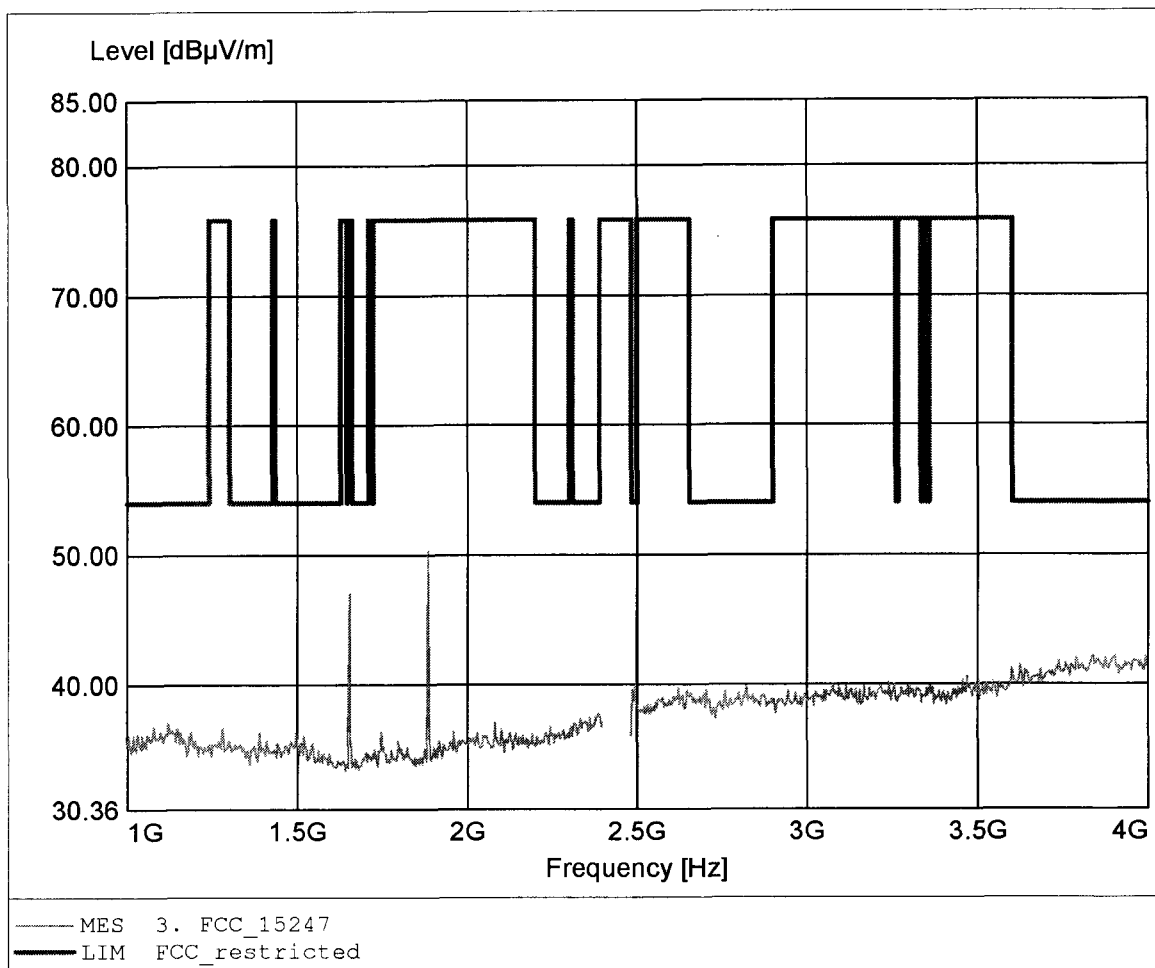

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300hs / 2480 MHz
Test Site / Operator: ETS / Mr. Treffke
Test Condition: 25°C / Unom: 3.6 V DC rechargeable battery
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.884GHz, Emax: 50.56dBµV/m, RBW: 1MHz

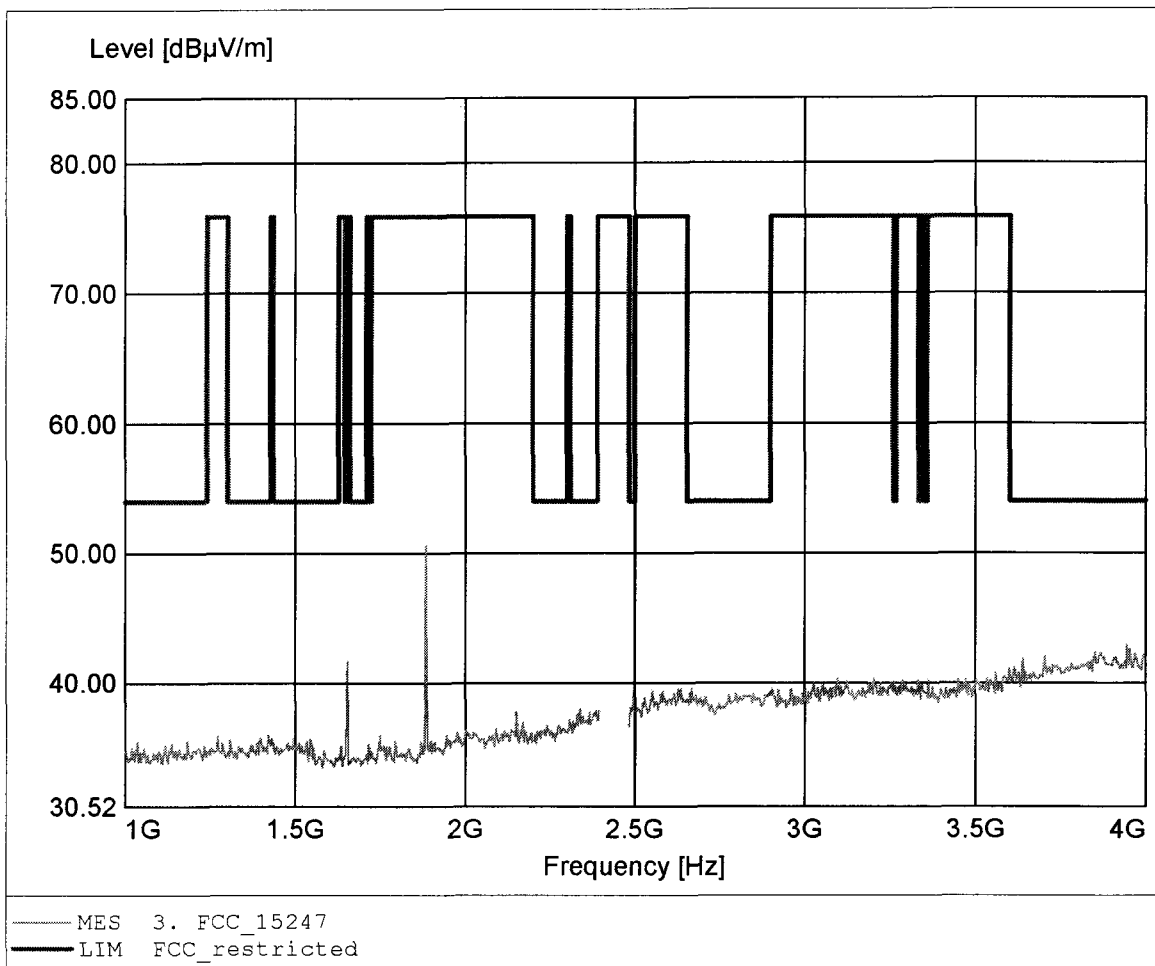

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300hs / 2480 MHz
Test Site / Operator: ETS / Mr. Treffke
Test Condition: 25°C / Unom: 3.6 V DC rechargeable battery
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.954GHz, Emax: 47.99dBµV/m, RBW: 1MHz

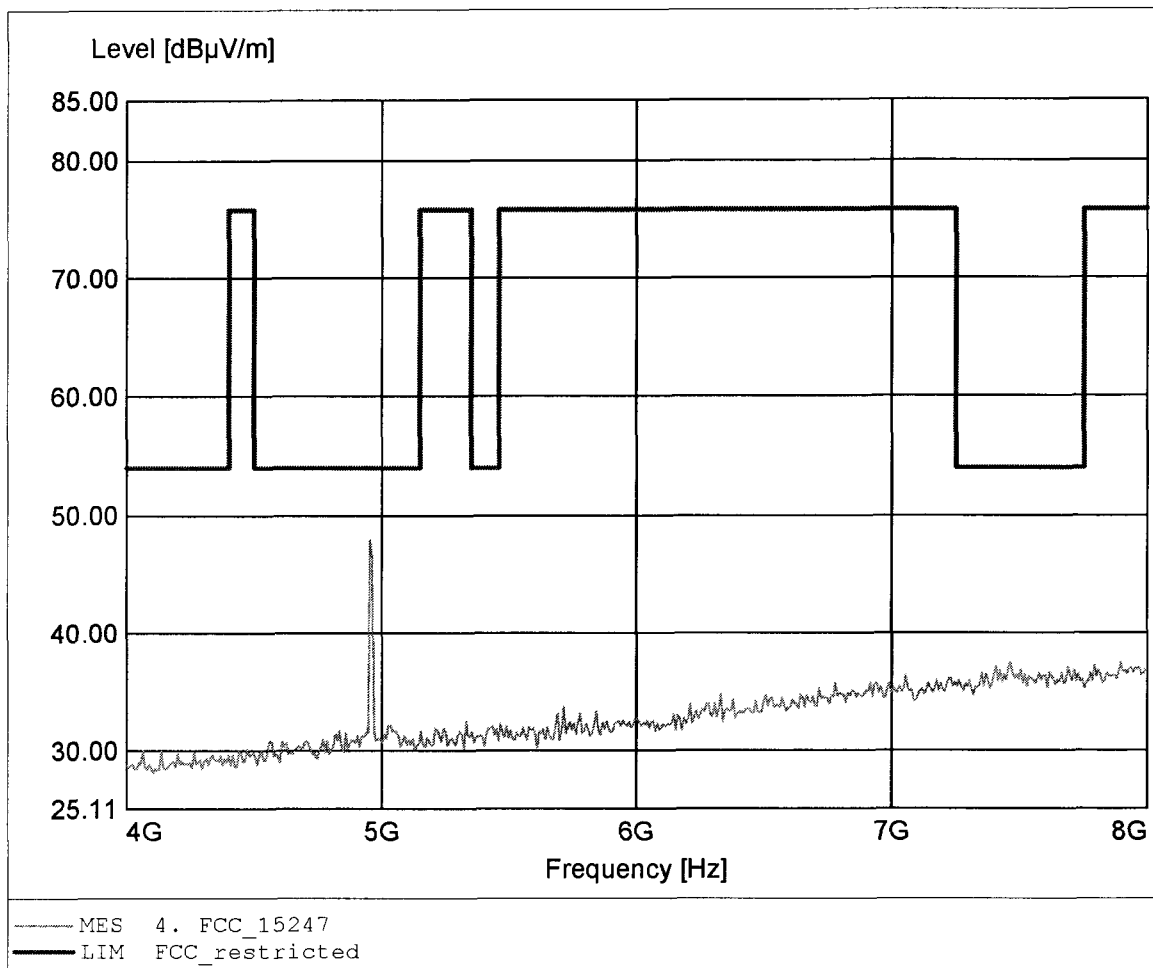

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300hs / 2480 MHz
Test Site / Operator: ETS / Mr. Treffke
Test Condition: 25°C / Unom: 3.6 V DC rechargeable battery
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.954GHz, Emax: 46.55dBuV/m, RBW: 1MHz

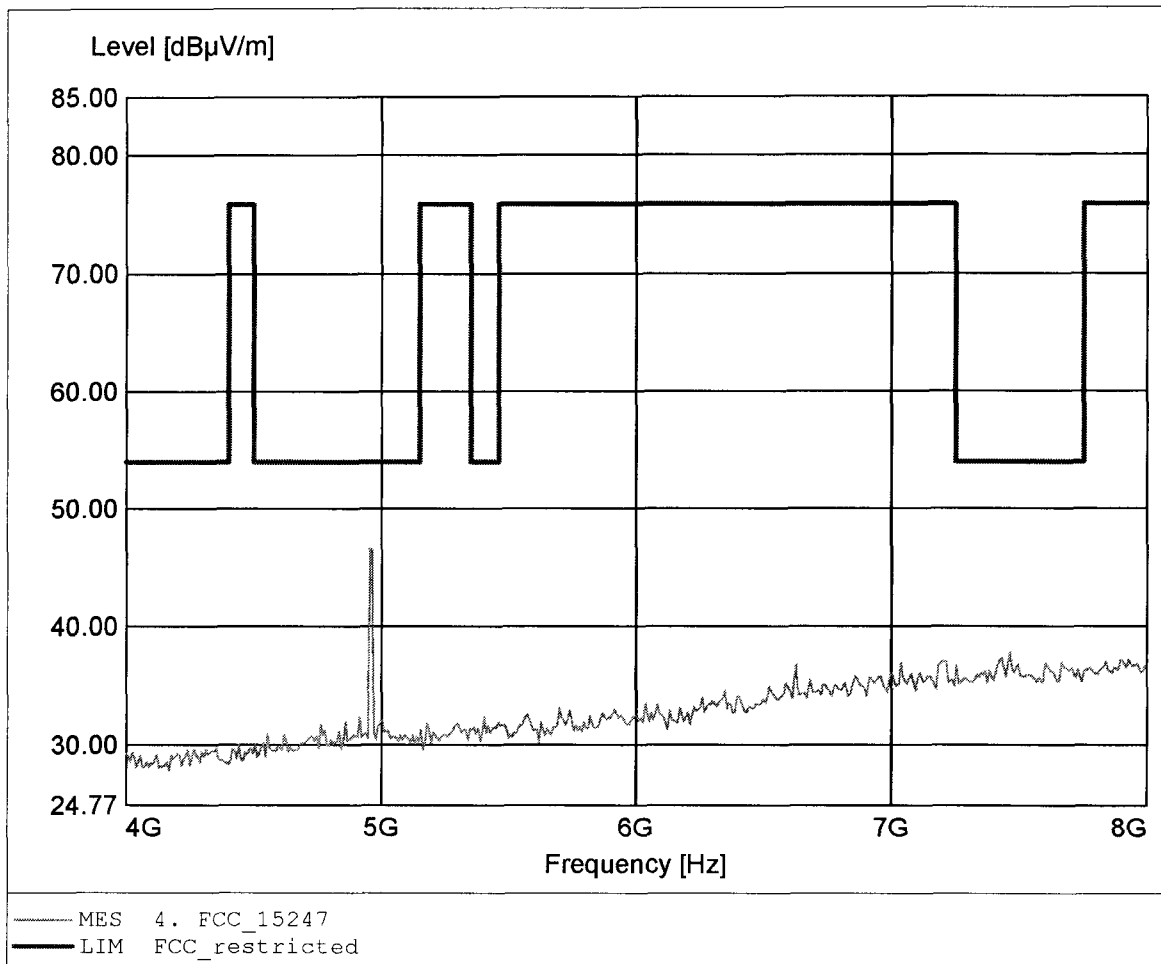

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300hs / 2480 MHz
Test Site / Operator: ETS / Mr. Treffke
Test Condition: 25°C / Unom: 3.6 V DC rechargeable battery
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.527GHz, Emax: 41.19dBµV/m, RBW: 1MHz

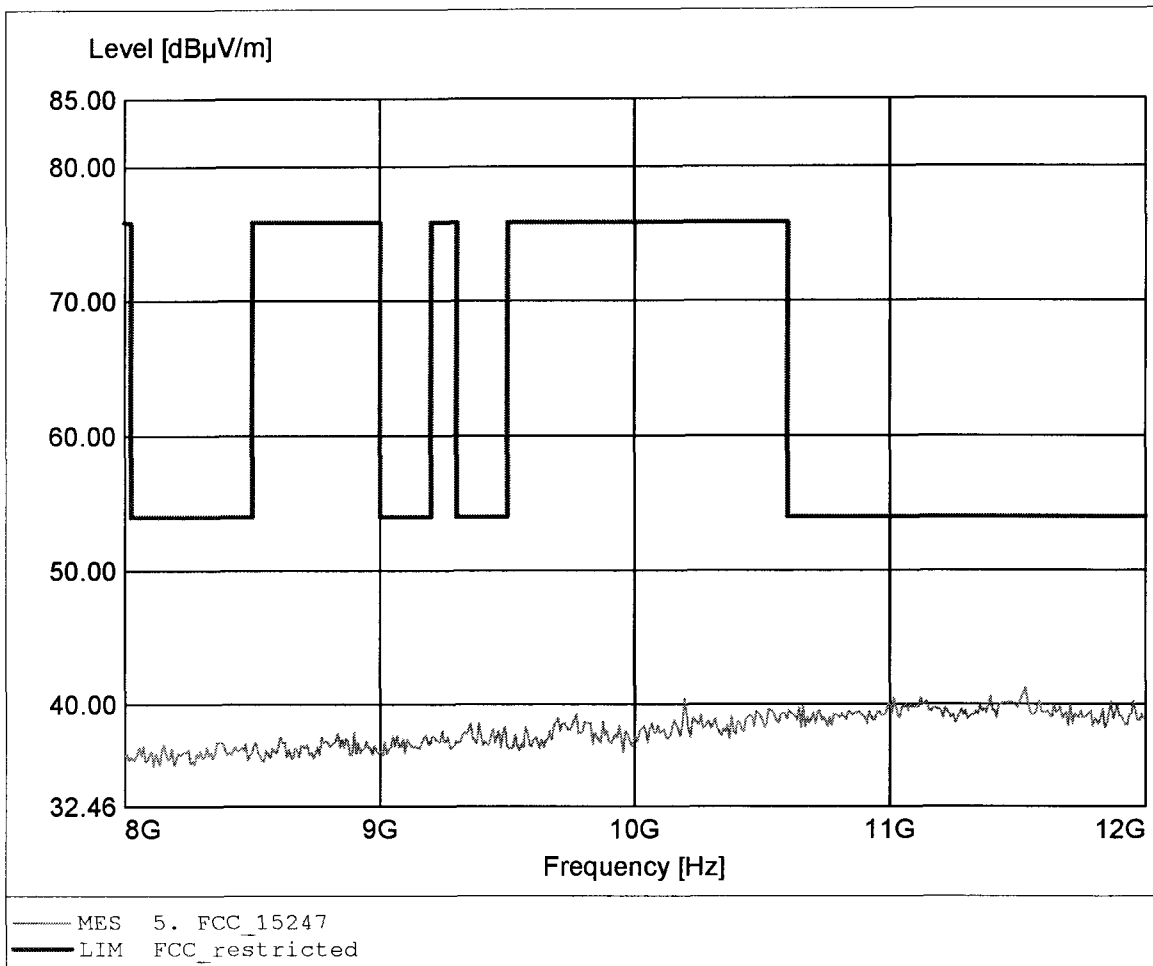

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300hs / 2480 MHz
Test Site / Operator: ETS / Mr. Treffke
Test Condition: 25°C / Unom: 3.6 V DC rechargeable battery
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.647GHz, Emax: 40.98dBµV/m, RBW: 1MHz

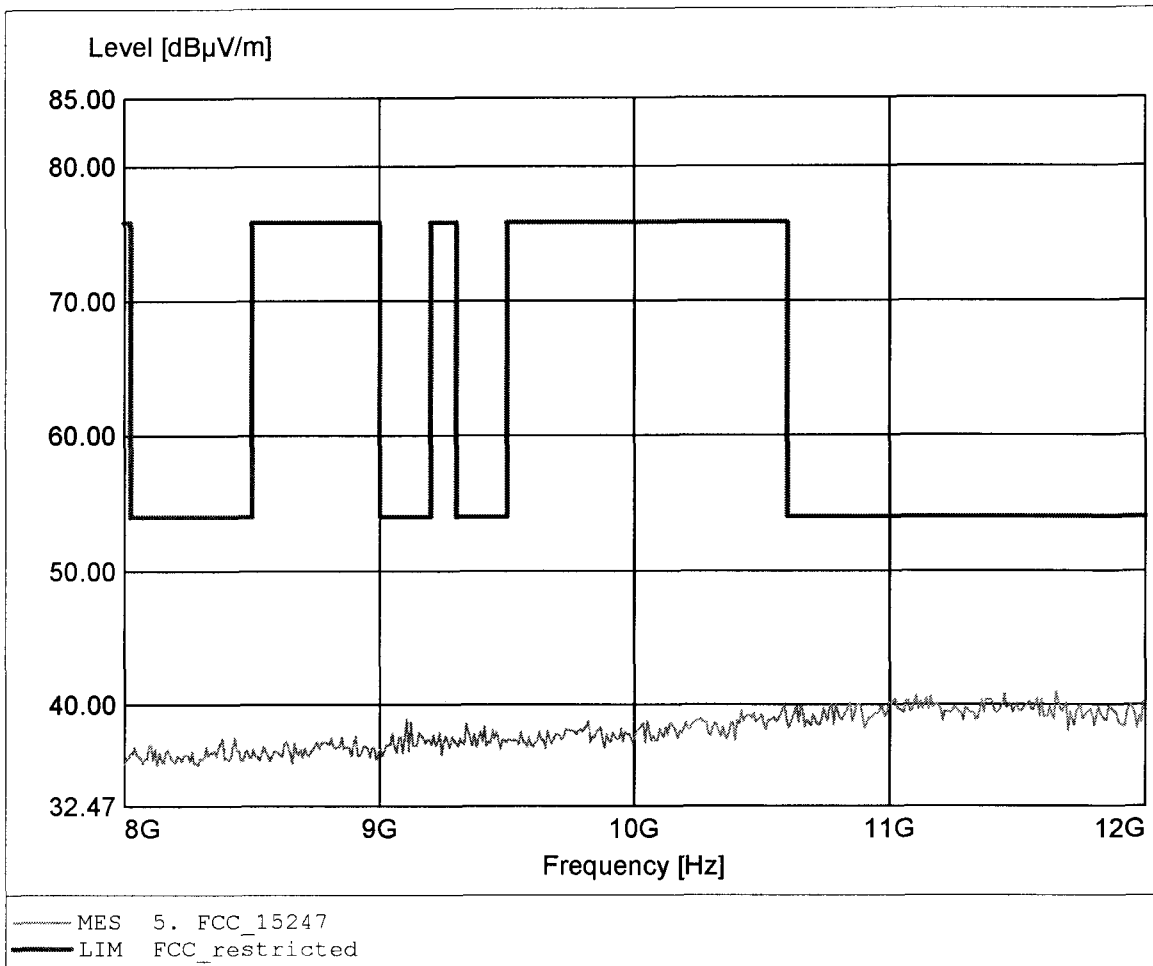

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300hs / 2480 MHz
Test Site / Operator: ETS / Mr. Treffke
Test Condition: 25°C / Unom: 3.6 V DC rechargeable battery
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.084GHz, Emax: 43.20dBµV/m, RBW: 1MHz

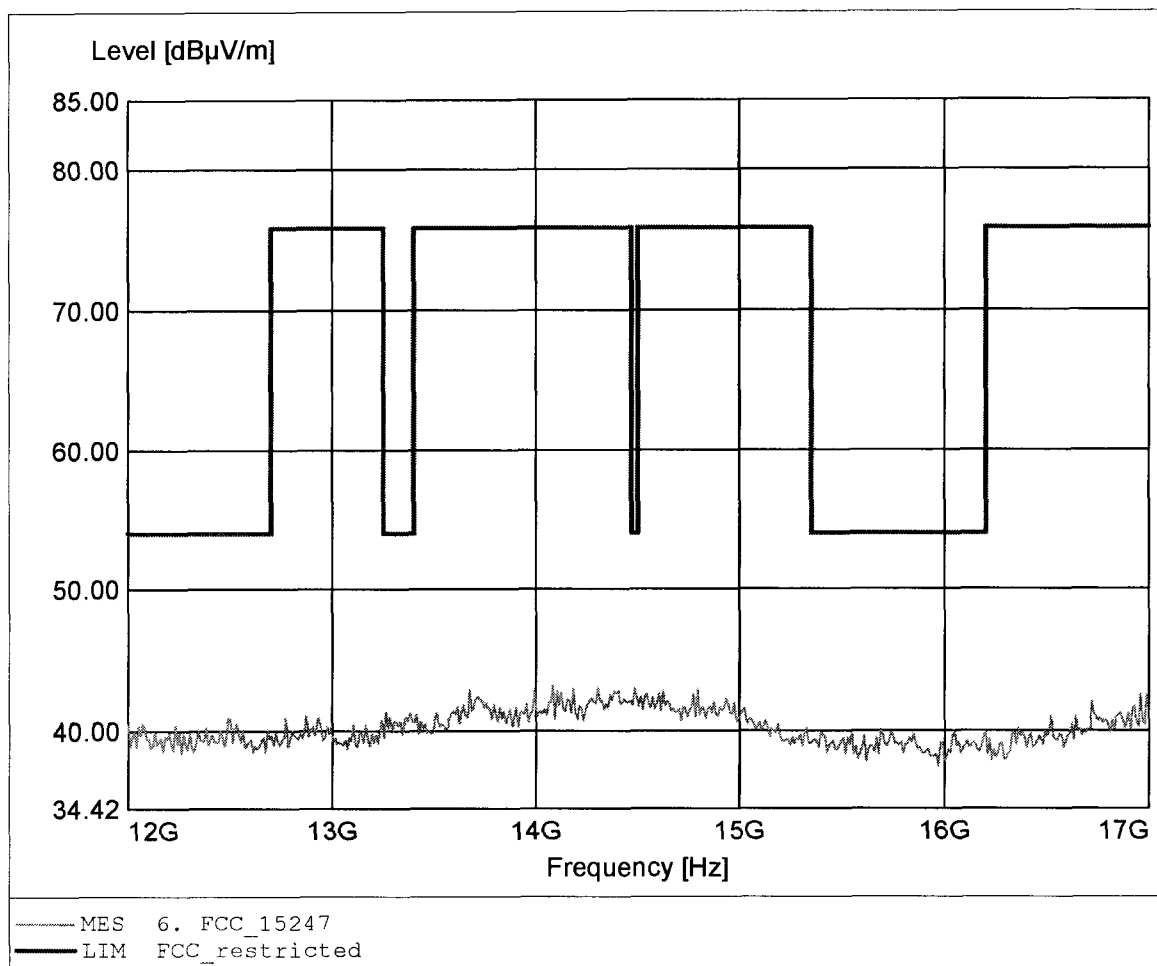

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300hs / 2480 MHz
Test Site / Operator: ETS / Mr. Treffke
Test Condition: 25°C / Unom: 3.6 V DC rechargeable battery
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.305GHz, Emax: 43.76dBµV/m, RBW: 1MHz

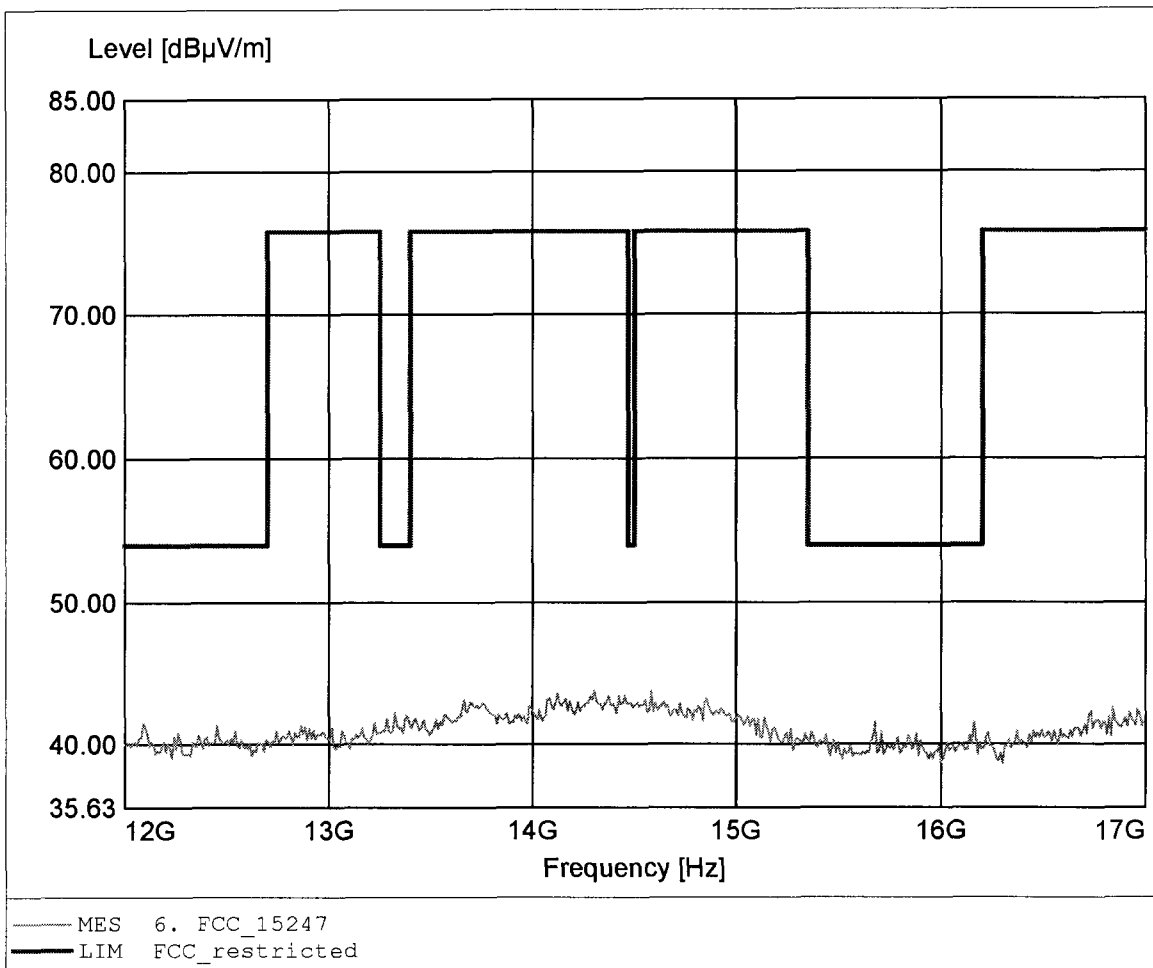

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C

Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300hs / 2480 MHz
Test Site / Operator: ETS / Mr. Treffke
Test Condition: 25°C / Unom: 3.6 V DC rechargeable battery
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 23.892GHz, Emax: 43.63dBµV/m, RBW: 1MHz

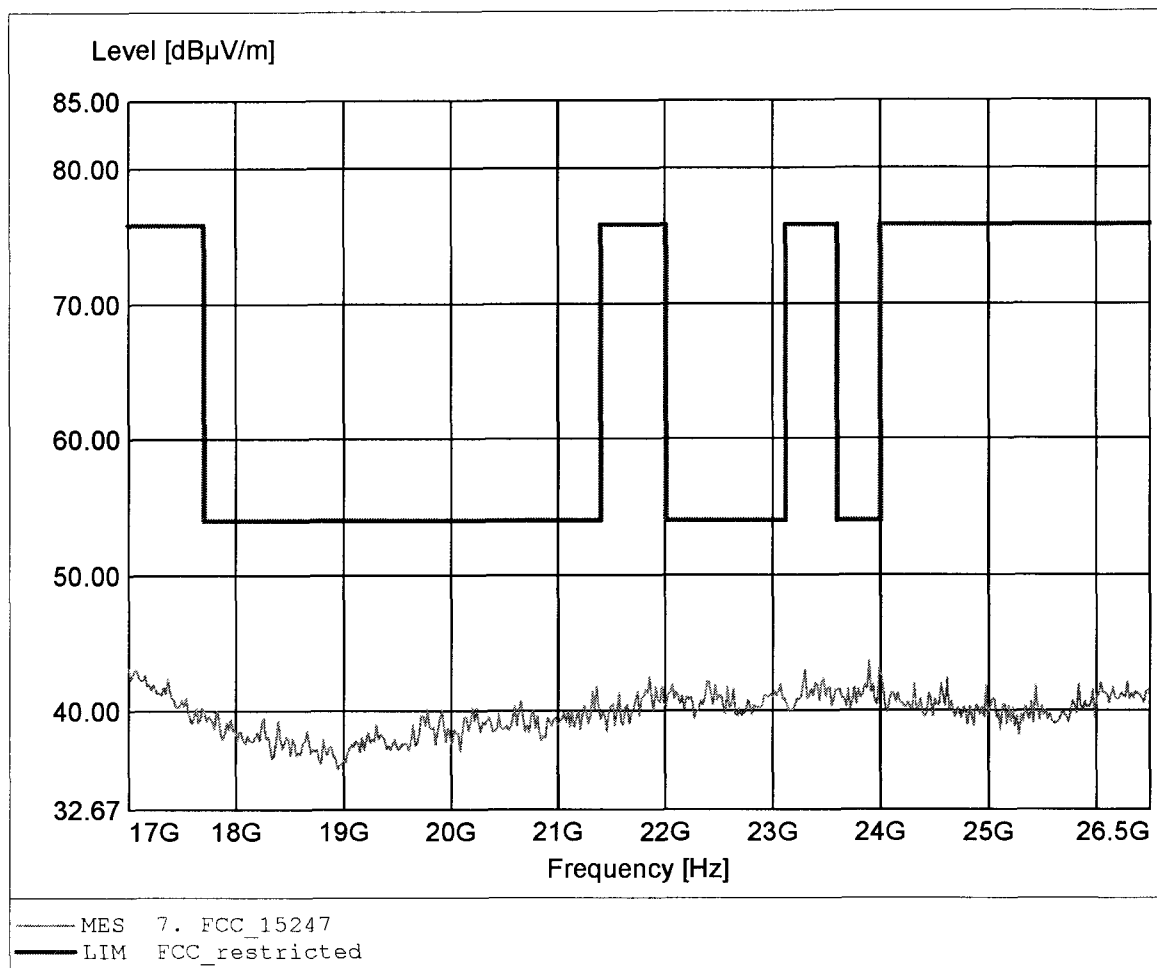

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C

Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300hs / 2480 MHz
Test Site / Operator: ETS / Mr. Treffke
Test Condition: 25°C / Unom: 3.6 V DC rechargeable battery
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.076GHz, Emax: 43.98dBµV/m, RBW: 1MHz

