



Jabra Evolve2 50 Antenna report

Revision: 1
Author: Luisa Gong
Date: 2022-07-29

Revision History:

Revision	Date	Change by	Description
1	2022.07.29	Luisa Gong	First Revision

Table of Contents

1	Introduction	3
2	Specification	4
2.1	Electrical Properties	4
2.2	Physical Properties	4
3	Anechoic Chamber	5
4	Results	6
4.1	Conducted power	6
4.2	Total radiated power.....	6
4.3	Antenna patterns	6
5	Conclusion	13

This document is the property of GN Audio A/S and is to be treated as confidential by the party to whom it has been submitted by GN Audio A/S and is not to be disclosed to any third party without the specific prior written permission of GN Audio A/S.
© 2016 GN Audio A/S. All rights reserved.

1 Introduction

This document describes the radiation performance measurements made on a Jabra Evolve2 50. The measurement results provided in this report are: the total radiated power at three frequencies and the antenna radiation patterns at three frequencies in free space.

The measurements have been performed by:

Luisa Gong

RF Engineer

GN Audio A/S

2 Specification

2.1 Electrical Properties

Frequency Range:	2.402GHz ~2.480GHz
Impedance:	50 Ω nominal
Radiation:	omni-directional

2.2 Physical Properties

Type: PCB antenna

Operating temp: -20 ~ +60 °C

3 Anechoic Chamber



This document is the property of GN Audio A/S and is to be treated as confidential by the party to whom it has been submitted by GN Audio A/S and is not to be disclosed to any third party without the specific prior written permission of GN Audio A/S.
© 2016 GN Audio A/S. All rights reserved.

4 Results

4.1 Conducted power

Results:

a conducted output power of 12dBm on each channel.

4.2 Total radiated power

Channel	0	39	78
Frequency[MHz]	2402	2441	2480
Peak Equivalent isotropic radiated power (EIRP)	15.73 dBm	15.16 dBm	14.75 dBm
Total radiated power	10.16 dBm	9.64 dBm	9.01 dBm

4.3 Antenna patterns

2.402 GHz

CTIA TRP Report (RP_Bluetooth_ch0_tot)

Common Information:

Test Description:	GN OTA Test Report
Operating Conditions:	Fellow_VerC_Ste_FS_TRP
Operator Name:	Luisa
Comment:	

Test Information:


Test Method:	Radiated Power Mobile Phone
Test Condition:	FS: Free Space
Frequency:	2402.000 MHz
Test Time:	Start: 7/29/2022 5:24:21 PM; Stop: 7/29/2022 5:47:13 PM
CMU200 Connectors:	In: RF2 (45.0 dB), Out: RF2 (45.0 dB)
Cal Data Hor:	18.71 dB (X-OTA_OTA_RadPwr_2205-2695MHz-Horizontal-Att)
Cal Data Ver:	19.74 dB (X-OTA_OTA_RadPwr_2205-2695MHz-Vertical-Att)

OTA Evaluation Results:


Total Radiated Power	10.16 dBm
Peak EIRP	15.73 dBm
Directivity	5.57 dBi
Peak Gain	15.73 dBi
NHPRP 45 j ä	8.78 dBm
NHPRP 45 j ä / TRP	-1.39 dB
NHPRP 45 j ä / TRP	72.66 %
NHPRP 30 j ä	7.34 dBm
NHPRP 30 j ä / TRP	-2.82 dB
NHPRP 30 j ä / TRP	52.21 %
NHPRP 22.5 j ä	6.12 dBm
NHPRP 22.5 j ä / TRP	-4.05 dB
NHPRP 22.5 j ä / TRP	39.38 %
UHRP	6.21 dBm
UHRP / TRP	-3.95 dB
UHRP / TRP	40.28 %
LHRP	7.93 dBm
LHRP / TRP	-2.24 dB
LHRP / TRP	59.72 %
PGRP (0-120 j ä)	8.40 dBm
PGRP / TRP	-1.77 dB
PGRP / TRP	66.57 %
Front/Back Ratio	6.29
PhiBW	185.2 deg
PhiBW Up	129.9 deg
PhiBW Down	55.3 deg
ThetaBW	30.3 deg
ThetaBW Up	14.9 deg
ThetaBW Down	15.4 deg
Boresight Phi	285 deg
Boresight Theta	150 deg
Maximum Power	15.73 dBm
Minimum Power	-3.52 dBm
Average Power	9.89 dBm
Max/Min Ratio	19.26 dB
Max/Avg Ratio	5.84 dB
Min/Avg Ratio	-13.41 dB
Worst Single Value	-16.20 dBm
Worst Position	Azi = 195 deg; Elev = 165 deg; Pol = Hor

This document is the property of GN Audio A/S and is to be treated as confidential by the party to whom it has been submitted by GN Audio A/S and is not to be disclosed to any third party without the specific prior written permission of GN Audio A/S. © 2016 GN Audio A/S. All rights reserved.


Theta = 0, Phi = 0




Theta = 180, Phi = 0




Theta = 90, Phi = 0




Theta = 90, Phi = 180



Theta = 90, Phi = 270



Theta = 90, Phi = 90



This document is the property of GN Audio A/S and is to be treated as confidential by the party to whom it has been submitted by GN Audio A/S and is not to be disclosed to any third party without the specific prior written permission of GN Audio A/S. © 2016 GN Audio A/S. All rights reserved.

2.441GHZ

CTIA TRP Report (RP_Bluetooth_ch39_tot)

Common Information:

Test Description: GN OTA Test Report
 Operating Conditions: Fellow_VerC_Ste_FS_TRP
 Operator Name: Luisa
 Comment:

Test Information:


Test Method: Radiated Power Mobile Phone
 Test Condition: FS: Free Space
 Frequency: 2441.000 MHz
 Test Time: Start: 7/29/2022 5:24:21 PM; Stop: 7/29/2022 5:47:13 PM
 CMU200 Connectors: In: RF2 (45.0 dB), Out: RF2 (45.0 dB)
 Cal Data Hor: 18.60 dB (X-OTA_OTA_RadPwr_2205-2695MHz-Horizontal-Att)
 Cal Data Ver: 19.59 dB (X-OTA_OTA_RadPwr_2205-2695MHz-Vertical-Att)

OTA Evaluation Results:


Total Radiated Power 9.64 dBm
 Peak EIRP 15.16 dBm
 Directivity 5.52 dBi
 Peak Gain 15.16 dBi
 NHPRP 45 ; a 8.26 dBm
 NHPRP 45 ; a / TRP -1.38 dB
 NHPRP 45 ; a / TRP 72.76 %
 NHPRP 30 ; a 6.88 dBm
 NHPRP 30 ; a / TRP -2.76 dB
 NHPRP 30 ; a / TRP 53.01 %
 NHPRP 22.5 ; a 5.69 dBm
 NHPRP 22.5 ; a / TRP -3.95 dB
 NHPRP 22.5 ; a / TRP 40.26 %
 UHRP 5.79 dBm
 UHRP / TRP -3.85 dB
 UHRP / TRP 41.25 %
 LHRP 7.33 dBm
 LHRP / TRP -2.31 dB
 LHRP / TRP 58.75 %
 PGRP (0-120 ; a) 7.95 dBm
 PGRP / TRP -1.69 dB
 PGRP / TRP 67.80 %
 Front/Back Ratio 4.92
 PhiBW 113.8 deg
 PhiBW Up 69.3 deg
 PhiBW Down 44.5 deg
 ThetaBW 36.7 deg
 ThetaBW Up 13.3 deg
 ThetaBW Down 23.4 deg
 Boresight Phi 270 deg
 Boresight Theta 150 deg
 Maximum Power 15.16 dBm
 Minimum Power -7.43 dBm
 Average Power 9.41 dBm
 Max/Min Ratio 22.59 dB
 Max/Avg Ratio 5.75 dB
 Min/Avg Ratio -16.84 dB
 Worst Single Value -23.02 dBm
 Worst Position Azi = 240 deg; Elev = 60 deg; Pol = Ver

This document is the property of GN Audio A/S and is to be treated as confidential by the party to whom it has been submitted by GN Audio A/S and is not to be disclosed to any third party without the specific prior written permission of GN Audio A/S. © 2016 GN Audio A/S. All rights reserved.


Theta = 0, Phi = 0




Theta = 180, Phi = 0




Theta = 90, Phi = 0




Theta = 90, Phi = 180



Theta = 90, Phi = 270



Theta = 90, Phi = 90



This document is the property of GN Audio A/S and is to be treated as confidential by the party to whom it has been submitted by GN Audio A/S and is not to be disclosed to any third party without the specific prior written permission of GN Audio A/S. © 2016 GN Audio A/S. All rights reserved.

2.480GHZ

CTIA TRP Report (RP_Bluetooth_ch78_tot)

Common Information:

Test Description: GN OTA Test Report
 Operating Conditions: Fellow_VerC_Ste_FS_TRP
 Operator Name: Luisa
 Comment:

Test Information:


Test Method: Radiated Power Mobile Phone
 Test Condition: FS: Free Space
 Frequency: 2480.000 MHz
 Test Time: Start: 7/29/2022 5:24:21 PM; Stop: 7/29/2022 5:47:13 PM
 CMU200 Connectors: In: RF2 (45.0 dB), Out: RF2 (45.0 dB)
 Cal Data Hor: 18.58 dB (X-OTA_OTA_RadPwr_2205-2695MHz-Horizontal-Att)
 Cal Data Ver: 19.25 dB (X-OTA_OTA_RadPwr_2205-2695MHz-Vertical-Att)

OTA Evaluation Results:


Total Radiated Power	9.01 dBm
Peak EIRP	14.75 dBm
Directivity	5.74 dBi
Peak Gain	14.75 dBi
NHPRP 45 j ā	7.59 dBm
NHPRP 45 j ā / TRP	-1.42 dB
NHPRP 45 j ā / TRP	72.03 %
NHPRP 30 j ā	6.19 dBm
NHPRP 30 j ā / TRP	-2.83 dB
NHPRP 30 j ā / TRP	52.17 %
NHPRP 22.5 j ā	5.01 dBm
NHPRP 22.5 j ā / TRP	-4.00 dB
NHPRP 22.5 j ā / TRP	39.77 %
UHRP	5.16 dBm
UHRP / TRP	-3.85 dB
UHRP / TRP	41.24 %
LHRP	6.70 dBm
LHRP / TRP	-2.31 dB
LHRP / TRP	58.76 %
PGRP (0-120 j ā)	7.34 dBm
PGRP / TRP	-1.67 dB
PGRP / TRP	68.09 %
Front/Back Ratio	9.23
PhiBW	58.6 deg
PhiBW Up	33.0 deg
PhiBW Down	25.6 deg
ThetaBW	34.9 deg
ThetaBW Up	24.1 deg
ThetaBW Down	10.8 deg
Boresight Phi	255 deg
Boresight Theta	135 deg
Maximum Power	14.75 dBm
Minimum Power	-10.01 dBm
Average Power	8.72 dBm
Max/Min Ratio	24.76 dB
Max/Avg Ratio	6.03 dB
Min/Avg Ratio	-18.73 dB
Worst Single Value	-17.08 dBm
Worst Position	Azi = 30 deg; Elev = 135 deg; Pol = Hor

This document is the property of GN Audio A/S and is to be treated as confidential by the party to whom it has been submitted by GN Audio A/S and is not to be disclosed to any third party without the specific prior written permission of GN Audio A/S. © 2016 GN Audio A/S. All rights reserved.


Theta = 0, Phi = 0




Theta = 180, Phi = 0

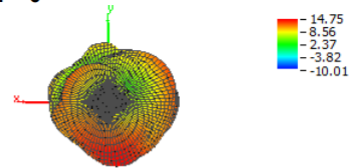


Theta = 90, Phi = 0




Theta = 90, Phi = 180

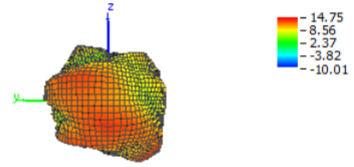

Theta = 90, Phi = 270



Theta = 90, Phi = 90

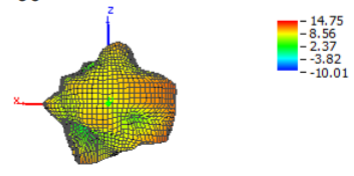

This document is the property of GN Audio A/S and is to be treated as confidential by the party to whom it has been submitted by GN Audio A/S and is not to be disclosed to any third party without the specific prior written permission of GN Audio A/S. © 2016 GN Audio A/S. All rights reserved.

5 Conclusion

The total radiated power from the Jabra Evolve2 50 varies from 9.01 dBm to 10.16 dBm in free space depending on the frequency. The conducted power is 12 dBm. These figures yield an antenna gain(peak) in the range of 2.75 dBi and 3.73 dBi.

	2402 MHz	2440 MHz	2480 MHz
Conducted power	12 dBm	12 dBm	12 dBm
Peak Equivalent isotropic radiated power (EIRP)	15.73 dBm	15.16 dBm	14.75 dBm

	2402 MHz	2440 MHz	2480 MHz
Antenna gain (Peak)	3.73 dBi	3.16 dBi	2.75 dBi

This document is the property of GN Audio A/S and is to be treated as confidential by the party to whom it has been submitted by GN Audio A/S and is not to be disclosed to any third party without the specific prior written permission of GN Audio A/S.
 © 2016 GN Audio A/S. All rights reserved.