



**FCC OET BULLETIN 65 SUPPLEMENT C
IC RSS-102 ISSUE 3**

SAR EVALUATION REPORT

For

Handheld touch screen iPod music device with 802.11b/g and Bluetooth radio functions

**MODEL: A1318
FCC ID: BCG-2310
IC: 579C-2310**

REPORT NUMBER: 09U12616-2B

ISSUE DATE: September 9, 2009

Prepared for

**APPLE INC
1 INFINITE LOOP, MS-26A
CUPERTINO, CA 95014**

Prepared by

**COMPLIANCE CERTIFICATION SERVICES
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	August 28, 2009	Initial Issue	--
A	September 1, 2009	Updated model name	Sunny Shih
B	September 9, 2009	Updated KDB description form 648474 to 447498	Sunny Shih

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	6
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>6</i>
4.2. <i>MEASUREMENT UNCERTAINTY</i>	<i>7</i>
5. EQUIPMENT UNDER TEST	8
6. SYSTEM SPECIFICATIONS.....	9
7. COMPOSITION OF INGREDIENTS FOR TISSUE SIMULATING LIQUIDS	10
8. LIQUID PARAMETERS CHECK	11
8.1. <i>LIQUID CHECK RESULTS FOR 2450 MHZ.....</i>	<i>12</i>
9. SYSTEM CHECK	13
9.1. <i>SYSTEM CHECK RESULTS FOR D2450V2.....</i>	<i>13</i>
10. OUTPUT POWER VERIFICATION.....	14
11. SUMMARY OF TEST RESULTS	14
11.1. <i>LCD UP.....</i>	<i>14</i>
11.2. <i>LCD DOWN.....</i>	<i>14</i>
12. KDB 447498 MULTI XMITER ASSESSMENT	14
13. WORST-CASE SAR TEST PLOTS	15
14. ATTACHMENTS.....	16
15. TEST SETUP PHOTO	17

1. ATTESTATION OF TEST RESULTS

COMPANY NAME:	APPLE INC 1 INFINITE LOOP, MS-26A CUPERTINO, CA 95014
EUT DESCRIPTION:	Handheld touch screen iPod music device with 802.11b/g and Bluetooth radio functions
MODEL NUMBER:	A1318
DEVICE CATEGORY:	Portable
EXPOSURE CATEGORY:	General Population/Uncontrolled Exposure
DATE TESTED:	August 19, 2009

THE HIGHEST SAR VALUES:

FCC / IC Rule Parts	Frequency Range (MHz)	The Highest SAR Values (1g_mW/g)	Limit mW/g)
15.247 / RSS-210	2412 – 2462	Body: 1.2 mW/g (LCD up)	1.6


APPLICABLE STANDARDS AND TEST PROCEDURES:

STANDARDS AND TEST PROCEDURES	TEST RESULTS
FCC OET Bulletin 65 Supplement C and the following specific Test Procedures: <ul style="list-style-type: none"> ○ KDB 248227 D01 SAR measurement procedures for 802.11 a/b/g transmitters ○ KDB 447498 D01 Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies 	Pass
<ul style="list-style-type: none"> ● RSS-102 ISSUE 3 	Pass

Compliance Certification Services, Inc. (CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For CCS By:



SUNNY SHIH
 ENGINEERING SUPERVISOR
 COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC OET Bulletin 65 Supplement C, IC RSS 102 Issue 3 and the following specific FCC Test Procedures.

- KDB 248227 D01 SAR measurement procedures for 802.11 a/b/g transmitters
- KDB 447498 Mobile and Portable Device, RF Exposure Procedure and Equipment authorization Policy

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due date		
				MM	DD	Year
Robot - Six Axes	Stäubli	RX90BL	N/A	N/A		
Robot Remote Control	Stäubli	CS7MB	3403-91535	N/A		
DASY4 Measurement Server	SPEAG	SEUMS001BA	1041	N/A		
Probe Alignment Unit	SPEAG	LB (V2)	261	N/A		
SAM Phantom (SAM1)	SPEAG	QD000P40CA	1185	N/A		
SAM Phantom (SAM2)	SPEAG	QD000P40CA	1050	N/A		
Oval Flat Phantom (ELI 4.0)	SPEAG	QD OVA001 B	1003	N/A		
Electronic Probe kit	HP	85070C	N/A	N/A		
S-Parameter Network Analyzer	Agilent	8753ES-6	MY40001647	11	14	2009
Signal Generator	Agilent	8753ES-6	MY40001647	11	14	2009
E-Field Probe	SPEAG	EX3DV4	3686	3	23	1010
Thermometer	ERTCO	639-1S	1718	5	1	2010
Data Acquisition Electronics	SPEAG	DAE3 V1	427	10	20	2009
System Validation Dipole	SPEAG	D900V2	108	1	21	2010
System Validation Dipole	SPEAG	D1800V2	294	1	29	2010
System Validation Dipole	SPEAG	D1900V2	5d043	1	29	2010
System Validation Dipole	SPEAG	D2450V2	748	4	14	2010
System Validation Dipole	SPEAG	D5GHzV2	1003	11	21	2009
MXA Signal Analyzer	Agilent	N9020A	US48350984	10	23	2009
ESG Vector Signal Generator	Agilent	E4438C	US44271090	9	17	2010
Power Meter	Giga-tronics	8651A	8651404	1	11	2010
Power Sensor	Giga-tronics	80701A	1834588	1	11	2010
Amplifier	Mini-Circuits	ZVE-8G	90606	N/A		
Amplifier	Mini-Circuits	ZHL-42W	D072701-5	N/A		
Simulating Liquid	CCS	H1900	N/A	Within 24 hrs of first test		
Simulating Liquid	CCS	M1900	N/A	Within 24 hrs of first test		
Simulating Liquid	CCS	H1800	N/A	Within 24 hrs of first test		
Simulating Liquid	CCS	M1800	N/A	Within 24 hrs of first test		
Simulating Liquid	CCS	H1700	N/A	Within 24 hrs of first test		
Simulating Liquid	CCS	M1700	N/A	Within 24 hrs of first test		
Simulating Liquid	CCS	H835	N/A	Within 24 hrs of first test		
Simulating Liquid	CCS	M835	N/A	Within 24 hrs of first test		
Simulating Liquid	CCS	H900	N/A	Within 24 hrs of first test		
Simulating Liquid	CCS	M900	N/A	Within 24 hrs of first test		
Simulating Liquid	SPAEG	H2450	N/A	Within 24 hrs of first test		
Simulating Liquid	SPAEG	M2450	N/A	Within 24 hrs of first test		

4.2. MEASUREMENT UNCERTAINTY

Measurement uncertainty for 300 MHz – 3000 MHz

Uncertainty component	Tol. (?)	Probe Dist.	Div.	Ci (1g)	Ci (10g)	Std. Unc.(?)		
						Ui (1g)	Ui(10g)	
Measurement System								
Probe Calibration	4.80	N	1	1	1	4.80	4.80	
Axial Isotropy	4.70	R	1.732	0.707	0.707	1.92	1.92	
Hemispherical Isotropy	9.60	R	1.732	0.707	0.707	3.92	3.92	
Boundary Effects	1.00	R	1.732	1	1	0.58	0.58	
Linearity	4.70	R	1.732	1	1	2.71	2.71	
System Detection Limits	1.00	R	1.732	1	1	0.58	0.58	
Readout Electronics	1.00	N	1	1	1	1.00	1.00	
Response Time	0.80	R	1.732	1	1	0.46	0.46	
Integration Time	2.60	R	1.732	1	1	1.50	1.50	
RF Ambient Conditions - Noise	1.59	R	1.732	1	1	0.92	0.92	
RF Ambient Conditions - Reflections	0.00	R	1.732	1	1	0.00	0.00	
Probe Positioner Mechanical Tolerance	0.40	R	1.732	1	1	0.23	0.23	
Probe Positioning With Respect to Phantom Shell	2.90	R	1.732	1	1	1.67	1.67	
Extrapolation, interpolation, and integration algorithms for max. SAR evaluation	3.90	R	1.732	1	1	2.25	2.25	
Test sample Related								
Test Sample Positioning	1.10	N	1	1	1	1.10	1.10	
Device Holder Uncertainty	3.60	N	1	1	1	3.60	3.60	
Power and SAR Drift Measurement	5.00	R	1.732	1	1	2.89	2.89	
Phantom and Tissue Parameters								
Phantom Uncertainty	4.00	R	1.732	1	1	2.31	2.31	
Liquid Conductivity - Target	5.00	R	1.732	0.64	0.43	1.85	1.24	
Liquid Conductivity - Meas.	8.60	N	1	0.64	0.43	5.50	3.70	
Liquid Permittivity - Target	5.00	R	1.732	0.6	0.49	1.73	1.41	
Liquid Permittivity - Meas.	3.30	N	1	0.6	0.49	1.98	1.62	
Combined Standard Uncertainty						RSS	11.44	10.49
Expanded Uncertainty (95% Confidence Interval)						K=2	22.87	20.98
Notes for table								
1. Tol. - tolerance in influence quantity								
2. N - Normal								
3. R - Rectangular								
4. Div. - Divisor used to obtain standard uncertainty								
5. Ci - is the sensitivity coefficient								

5. EQUIPMENT UNDER TEST

Handheld touch screen iPod music device with 802.11b/g and Bluetooth radio functions

Model: A1318

Normal operation:

- Held-held
- Worn on body (LCD facing-up; LCD facing-down) with 0 mm separation distance.


Co-located Tx:

- 802.11g cannot transmit simultaneously with Bluetooth

Antenna Separation distances:

0 cm - WiFi (802.11g)-to-Bluetooth antenna
(WiFi-to-Bluetooth are sharing a common antenna)

6. SYSTEM SPECIFICATIONS

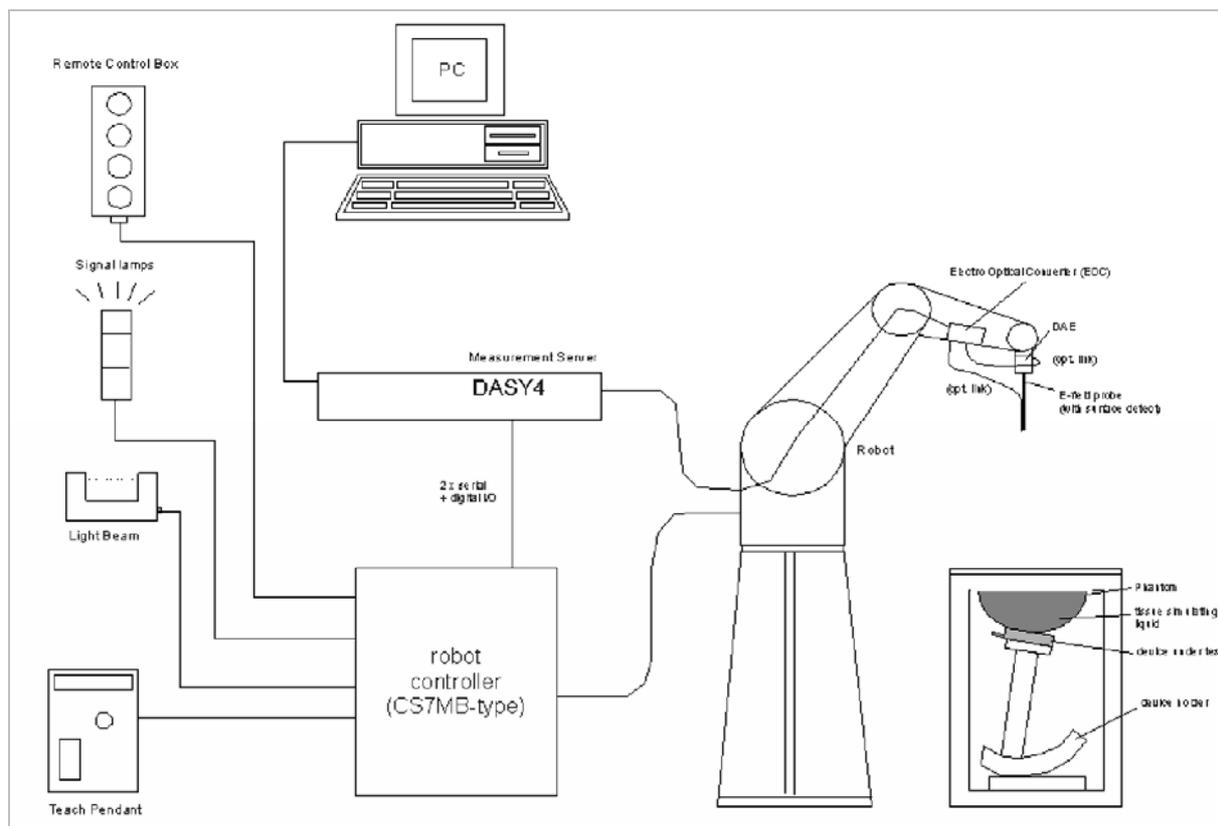

The DASY4 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 2000 or Windows XP.
- DASY4 software.
- Remote controls with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validate the proper functioning of the system.

7. COMPOSITION OF INGREDIENTS FOR TISSUE SIMULATING LIQUIDS

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

Salt: 99+% Pure Sodium Chloride

Sugar: 98+% Pure Sucrose

Water: De-ionized, 16 MΩ+ resistivity

HEC: Hydroxyethyl Cellulose

DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra pure): Polyethylene glycol mono [4-(1,1, 3, 3-tetramethylbutyl)phenyl]ether

8. LIQUID PARAMETERS CHECK

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The relative permittivity and conductivity of the tissue material should be within $\pm 5\%$ of the values given in the table below.

Reference Values of Tissue Dielectric Parameters for Head and Body Phantom (for 150 – 3000 MHz and 5800 MHz)

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in IEEE Standard 1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations and extrapolated according to the head parameters specified in IEEE Standard 1528.

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.8
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.9	55.2	0.97
900	41.5	0.97	55	1.05
915	41.5	0.98	55	1.06
1450	40.5	1.2	54	1.3
1610	40.3	1.29	53.8	1.4
1800 – 2000	40	1.4	53.3	1.52
2450	39.2	1.8	52.7	1.95
3000	38.5	2.4	52	2.73
5800	35.3	5.27	48.2	6

(ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000 \text{ kg/m}^3$)

8.1. LIQUID CHECK RESULTS FOR 2450 MHZ

Simulating Liquid Dielectric Parameters for Muscle 2450 MHz

Room Ambient Temperature = 24°C; Relative humidity = 40%

Measured by: Sunny Shih

f (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit (%)
2450	e'	52.33	Relative Permittivity (ϵ_r):	52.334	52.7	-0.69	± 5
	e"	13.89	Conductivity (σ):	1.894	1.95	-2.89	± 5

Liquid Temperature: 23 deg. C

August 19, 2009 1:10 PM

Frequency	e'	e"
2400000000	52.4304	13.646
2405000000	52.4183	13.7194
2410000000	52.4037	13.7846
2415000000	52.4001	13.8281
2420000000	52.3862	13.8543
2425000000	52.3816	13.8725
2430000000	52.3873	13.8658
2435000000	52.3715	13.8719
2440000000	52.3671	13.8864
2445000000	52.3381	13.9141
2450000000	52.3342	13.8932
2455000000	52.2652	13.8698
2460000000	52.2291	13.8417
2465000000	52.1653	13.8045
2470000000	52.1499	13.7569
2475000000	52.1348	13.7327
2480000000	52.1426	13.7398
2485000000	52.1358	13.7589
2490000000	52.1382	13.8162
2495000000	52.1401	13.89
2500000000	52.1352	13.9929

The conductivity (σ) can be given as:

$$\sigma = \omega \epsilon_0 e'' = 2 \pi f \epsilon_0 e''$$

where $f = \text{target } f * 10^6$

$$\epsilon_0 = 8.854 * 10^{-12}$$

9. SYSTEM CHECK

The system performance check is performed prior to any usage of the system in order to guarantee reproducible results. The system performance check verifies that the system operates within its specifications of $\pm 10\%$.

System Performance Check Measurement Conditions

- The measurements were performed in the flat section of the SAM twin phantom filled with Head or Body simulating liquid of the following parameters.
- The DASY4 system with an Isotropic E-Field Probe EX3DV4 was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
 For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7 x 7 x 7 fine cube was chosen for cube
- Distance between probe sensors and phantom surface was set to 3 mm.
 For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 250 mW $\pm 3\%$.
- The results are normalized to 1 W input power.

Reference SAR Values for HEAD & BODY-tissue from calibration certificate of SPEAG. Certificate no: D5GHzV2-1003_Nov07 and D2450V2-748_Apr08

f (MHz)	Head Tissue		Body Tissue	
	SAR _{1g}	SAR _{10g}	SAR _{1g}	SAR _{10g}
2450			49.5	23.3
5200	78.6	22.1	74.7	21.1
5500	80.4	22.7	80.1	22.5
5800	79.9	22.4	70.8	19.8

9.1. SYSTEM CHECK RESULTS FOR D2450V2

System Validation Dipole: D2450V2 SN: 748

Date: August 19, 2009

Ambient Temperature = 24°C; Relative humidity = 40%

Measured by: Sunny Shih

Medium	CW Signal (MHz)	Forward power (mW)	Measured (Normalized to 1 W)		Target	Delta (%)	Tolerance (%)
Body	2450	250	1g SAR:	47.2	49.5	-4.65	± 10
			10g SAR:	21.9	23.3	-6.01	

10. OUTPUT POWER VERIFICATION

The cable assembly insertion loss of 20.5 dB (including 20 dB pad and 0.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

802.11b

Ch. No.	f (MHz)	Average Conducted Output power (dBm)
1	2412	15.0
6	2437	15.0
11	2462	15.0

11. SUMMARY OF TEST RESULTS

11.1. LCD UP

Test position	Mode	Sep. dist. (cm)	Ch No.	f (MHz)	1g SAR (mW/g)	Limit (mW/g)
LCD Up	802.11b	0	1	2412	1.17	1.6
			6	2437	1.20	
			11	2462	1.18	

11.2. LCD DOWN

Test position	Mode	Sep. dist. (cm)	Ch No.	f (MHz)	1g SAR (mW/g)	Limit (mW/g)
LCD Down	802.11b	0	1	2412		1.6
			6	2437	0.748	
			11	2462		

12. KDB 447498 MULTI XMITER ASSESSMENT

Co-located Tx:

Antenna Separation distances:

Simultaneous TX SAR:

- WiFi (802.11g) cannot transmit simultaneously with Bluetooth
 - 0.0 cm - 802.11g-to-Bluetooth antenna
802.11g-to-Bluetooth are sharing a common antenna
- No

13. WORST-CASE SAR TEST PLOTS

WORST-CASE SAR PLOT for WiFi - BODY POSITION

Date/Time: 8/19/2009 7:20:27 PM

Test Laboratory: Compliance Certification Services

WiFi - Body LCD Up

DUT: Apple; Type: iPod; Serial: n/a

Communication System: 802.11bg; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.48, 6.48, 6.48); Calibrated: 3/23/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

LCD up - M-ch/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.594 mW/g

LCD up - M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 2.82 V/m; Power Drift = 0.695 dB

Peak SAR (extrapolated) = 5.07 W/kg

SAR(1 g) = 1.2 mW/g; SAR(10 g) = 0.343 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.90 mW/g

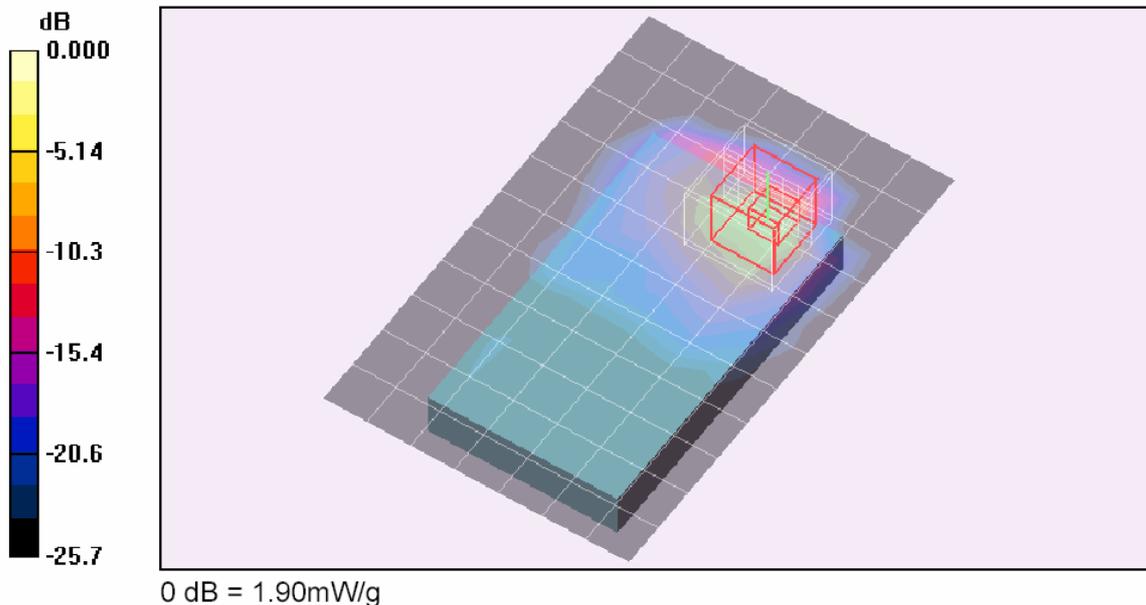


14. ATTACHMENTS


No.	Contents	No. of page (s)
1	System Performance Check Plots	2
2	SAR Test Plots	4
3	Certificate of E-Field Probe – EX3DV4 SN3686	10
4	Certificate of System Validation Dipole - D2450V2 SN:748	6

15. TEST SETUP PHOTO

LCD UP

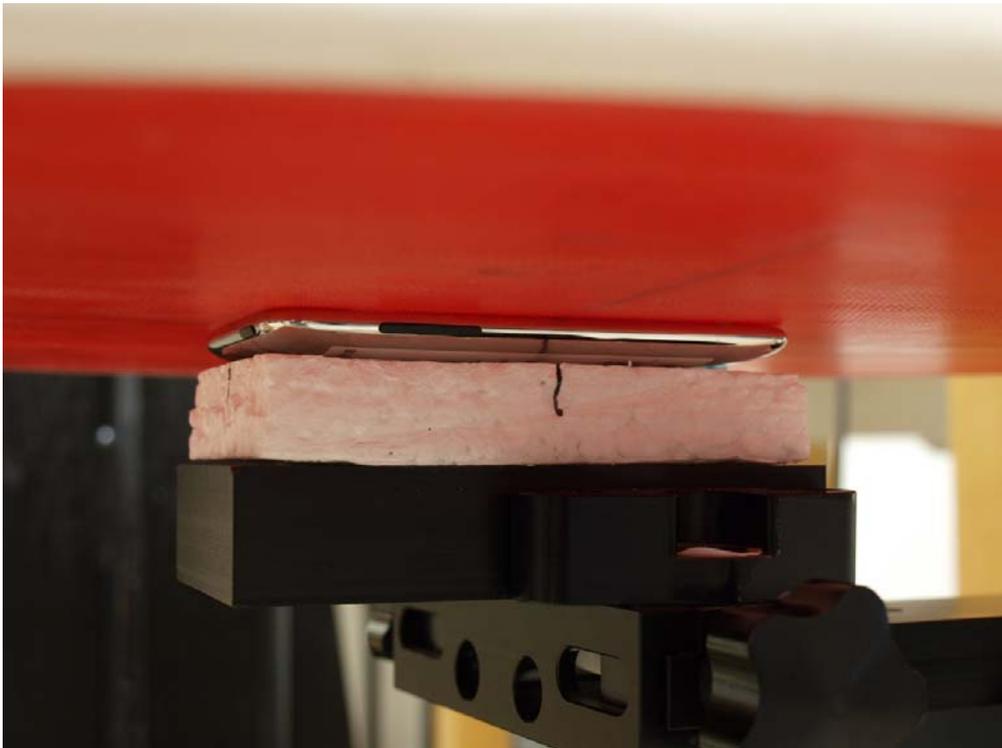

LCD DOWN

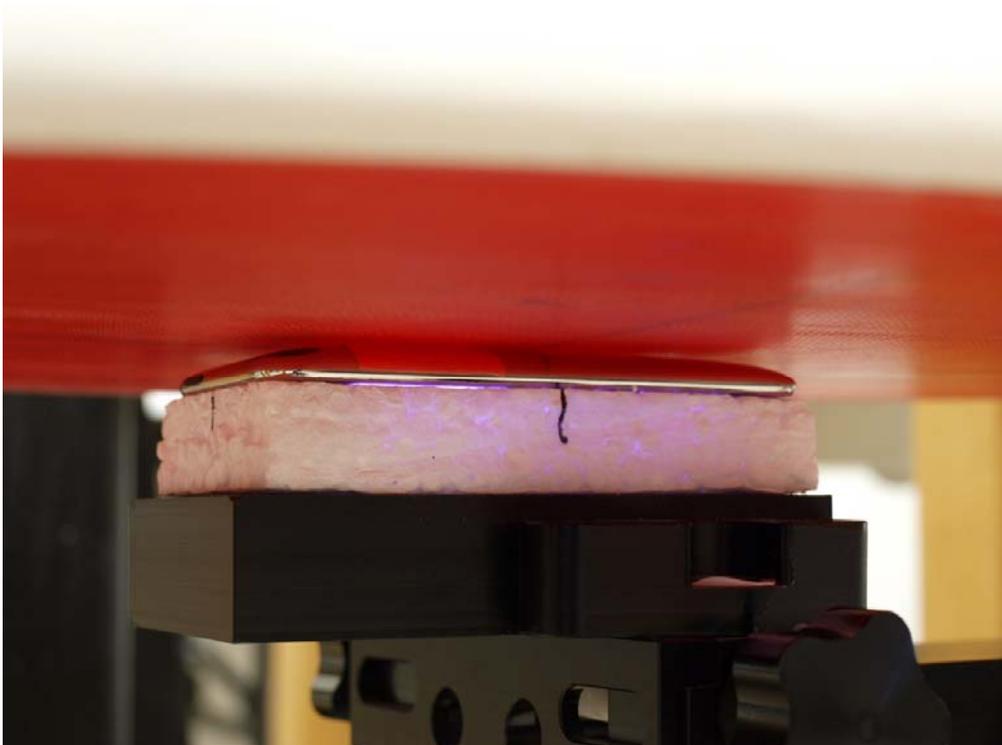

END OF REPORT