



**FCC CFR47 PART 15 SUBPART E
INDUSTRY CANADA RSS-210 ISSUE 8**

CERTIFICATION TEST REPORT

FOR

IEEE 802.11a/b/g/n AND BLUETOOTH RADIO

MODEL NUMBER: A1421

**FCC ID: BCG-A1421
IC ID: 579C-A1421**

REPORT NUMBER: 12U14485-2, REVISION B

ISSUE DATE: AUGUST 24, 2012

Prepared for
**APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A**

Prepared by
**UL CCS
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	08/06/12	Initial Issue	T. LEE
A	08/14/12	Corrected Test Method in Section 7.1.3 Removed TPC since maximum power is less than 500 mW	T. LEE
B	08/24/12	Added KDB 365942 reference	T. LEE

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	7
4.1. MEASURING INSTRUMENT CALIBRATION	7
4.2. SAMPLE CALCULATION	7
4.3. MEASUREMENT UNCERTAINTY	7
5. EQUIPMENT UNDER TEST	8
5.1. DESCRIPTION OF EUT	8
5.2. MAXIMUM OUTPUT POWER	8
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	8
5.4. SOFTWARE AND FIRMWARE	8
5.5. WORST-CASE CONFIGURATION AND MODE	9
5.6. DESCRIPTION OF TEST SETUP	10
6. TEST AND MEASUREMENT EQUIPMENT	13
7. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS	14
7.1.1. ON TIME AND DUTY CYCLE RESULTS	14
7.1.2. MEASUREMENT METHOD FOR POWER AND PPSD	14
7.1.3. MEASUREMENT METHOD FOR AVERAGE SPURIOUS EMISSIONS ABOVE 1 GHz	14
7.1.4. DUTY CYCLE PLOTS	15
8. ANTENNA PORT TEST RESULTS	17
8.1. 802.11a MODE IN THE 5.2 GHz BAND	17
8.1.1. 26 dB BANDWIDTH	17
8.1.2. 99% BANDWIDTH	20
8.1.3. AVERAGE POWER	23
8.1.4. OUTPUT POWER AND PPSD	24
8.1.5. PEAK EXCURSION	29
8.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND	32
8.2.1. 26 dB BANDWIDTH	32
8.2.2. 99% BANDWIDTH	35
8.2.3. AVERAGE POWER	38
8.2.4. OUTPUT POWER AND PPSD	39
8.2.5. PEAK EXCURSION	44
8.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND	47
8.3.1. 26 dB BANDWIDTH	47
8.3.2. 99% BANDWIDTH	49

8.3.3.	AVERAGE POWER	51
8.3.4.	OUTPUT POWER AND PPSD.....	52
8.3.5.	PEAK EXCURSION	56
8.4.	<i>802.11a MODE IN THE 5.3 GHz BAND.....</i>	<i>58</i>
8.4.1.	26 dB BANDWIDTH	58
8.4.2.	99% BANDWIDTH	61
8.4.3.	AVERAGE POWER	64
8.4.4.	OUTPUT POWER AND PPSD.....	65
8.4.5.	PEAK EXCURSION	69
8.5.	<i>802.11n HT20 MODE IN THE 5.3 GHz BAND.....</i>	<i>73</i>
8.5.1.	26 dB BANDWIDTH	73
8.5.2.	99% BANDWIDTH	76
8.5.3.	AVERAGE POWER	79
8.5.4.	OUTPUT POWER AND PPSD.....	80
8.5.5.	PEAK EXCURSION	84
8.6.	<i>802.11n HT40 MODE IN THE 5.3 GHz BAND.....</i>	<i>87</i>
8.6.1.	26 dB BANDWIDTH	87
8.6.2.	99% BANDWIDTH	89
8.6.3.	AVERAGE POWER	91
8.6.4.	OUTPUT POWER AND PPSD.....	92
8.6.5.	PEAK EXCURSION	95
8.7.	<i>802.11a MODE IN THE 5.6 GHz BAND.....</i>	<i>97</i>
8.7.1.	26 dB BANDWIDTH	97
8.7.2.	99% BANDWIDTH	100
8.7.3.	AVERAGE POWER	103
8.7.4.	OUTPUT POWER AND PPSD.....	104
8.7.5.	PEAK EXCURSION	108
8.8.	<i>802.11n HT20 MODE IN THE 5.6 GHz BAND.....</i>	<i>111</i>
8.8.1.	26 dB BANDWIDTH	111
8.8.2.	99% BANDWIDTH	114
8.8.3.	AVERAGE POWER	117
8.8.4.	OUTPUT POWER AND PPSD.....	118
8.8.5.	PEAK EXCURSION	122
8.9.	<i>802.11n HT40 MODE IN THE 5.6 GHz BAND.....</i>	<i>125</i>
8.9.1.	26 dB BANDWIDTH	125
8.9.2.	99% BANDWIDTH	128
8.9.3.	AVERAGE POWER	131
8.9.4.	OUTPUT POWER AND PPSD.....	132
8.9.5.	PEAK EXCURSION	136
9.	RADIATED TEST RESULTS	139
9.1.	<i>LIMITS AND PROCEDURE</i>	<i>139</i>
9.2.	<i>TRANSMITTER ABOVE 1 GHz</i>	<i>140</i>
9.2.1.	TX ABOVE 1 GHz 802.11a MODE IN THE 5.2 GHz BAND.....	140
9.2.2.	TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.2 GHz BAND.....	144
9.2.3.	TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.2 GHz BAND.....	148
9.2.4.	TX ABOVE 1 GHz 802.11a MODE IN THE 5.3 GHz BAND.....	152
9.2.5.	TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.3 GHz BAND.....	156

9.2.6.	TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.3 GHz BAND.....	160
9.2.7.	TX ABOVE 1 GHz 802.11a MODE IN THE 5.6 GHz BAND.....	164
9.2.8.	TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.6 GHz BAND.....	169
9.2.9.	TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.6 GHz BAND.....	174
9.2.10.	2.4GHZ AND 5GHZ BAND CO-LOCATION	179
9.3.	WORST-CASE BELOW 1 GHz	182
10.	AC POWER LINE CONDUCTED EMISSIONS	185
11.	DYNAMIC FREQUENCY SELECTION	189
11.1.	OVERVIEW.....	189
11.1.1.	LIMITS	189
11.1.2.	TEST AND MEASUREMENT SYSTEM	192
11.1.3.	SETUP OF EUT (CLIENT MODE).....	195
11.1.4.	SETUP OF EUT (CLIENT-TO-CLIENT COMMUNICATIONS MODE)	196
11.1.5.	DESCRIPTION OF EUT	197
11.2.	CLIENT MODE RESULTS FOR 20 MHz BANDWIDTH	199
11.2.1.	TEST CHANNEL	199
11.2.2.	RADAR WAVEFORM AND TRAFFIC	199
11.2.3.	OVERLAPPING CHANNEL TESTS	201
11.2.4.	MOVE AND CLOSING TIME	201
11.3.	CLIENT MODE RESULTS FOR 40 MHz BANDWIDTH	206
11.3.1.	TEST CHANNEL	206
11.3.2.	RADAR WAVEFORM AND TRAFFIC	206
11.3.3.	OVERLAPPING CHANNEL TESTS	208
11.3.4.	MOVE AND CLOSING TIME	208
11.3.5.	NON-OCCUPANCY PERIOD	213
11.4.	CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 20 MHz BANDWIDTH.....	214
11.4.1.	TEST CHANNEL	214
11.4.2.	RADAR WAVEFORM AND TRAFFIC	214
11.4.3.	OVERLAPPING CHANNEL TESTS	216
11.4.4.	MOVE AND CLOSING TIME	216

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA, 95014, U.S.A.

EUT DESCRIPTION: IEEE 802.11a/b/g/n AND BLUETOOTH RADIO

MODEL: A1421

SERIAL NUMBER: CCQHT01CF4K3 and CCQHV004F4K0 (DFS)

DATE TESTED: JUNE 18 - AUGUST 06, 2012

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E	Pass
INDUSTRY CANADA RSS-210 Issue 8 Annex 9	Pass
INDUSTRY CANADA RSS-GEN Issue 3	Pass

UL CCS tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For UL CCS By:

Tested By:



TIM LEE
STAFF ENGINEER
UL CCS



TOM CHEN
EMC ENGINEER
UL CCS

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, FCC 06-96, FCC KDB 789033, FCC KDB 365942, ANSI C63.4-2003, RSS-GEN Issue 3, and RSS-210 Issue 8.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

Model A1421, is a iPod Touch with multimedia functions (music, application support, and video), IEEE 802.11a/b/g/n and Bluetooth radio. The rechargeable battery is not user accessible.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5180 - 5240	802.11a	14.24	26.55
5180 - 5240	802.11n HT20	14.35	27.23
5190 - 5230	802.11n HT40	15.04	31.92
5260 - 5320	802.11a	15.09	32.28
5260 - 5320	802.11n HT20	15.18	32.96
5270 - 5310	802.11n HT40	14.89	30.83
5500 - 5700	802.11a	14.74	29.79
5500 - 5700	802.11n HT20	14.59	28.77
5510 - 5670	802.11n HT40	14.42	27.67

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PIFA antenna, with a maximum gain of 1.41 dBi in the 5.2 GHz band, 1.35 dBi in the 5.3 GHz band and a maximum gain of 3.08 dBi in the 5.5 GHz band

5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was 10A351

The EUT driver software installed during testing was Broadcom_Rel_6_10_56_158

The test utility software used during testing was WL_tool.

5.5. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

Based on the manufacturer's attestation that the nominal output power is reduced as the data rate increases, the data rates tested represent the highest power and worst-case with respect to EMC performance.

Worst-case data rates were:

802.11b mode: 1 Mbps
802.11g mode: 6 Mbps
802.11n HT20mode: MCS0
802.11n HT40mode: MCS0

5.6. DESCRIPTION OF TEST SETUP


SUPPORT EQUIPMENT

Support Equipment List			
Description	Manufacturer	Model	Serial Number
AC Adapter	Apple	A1344	N/A
Headset	Apple	N/A	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC	1	MINI USB	UN-SHELDED	1.0m	None

SETUP DIAGRAM FOR RADIATED EMISSIONS TESTS



SETUP DIAGRAM FOR BELOW 1 GHZ AND AC LINE CONDUCTED TESTS

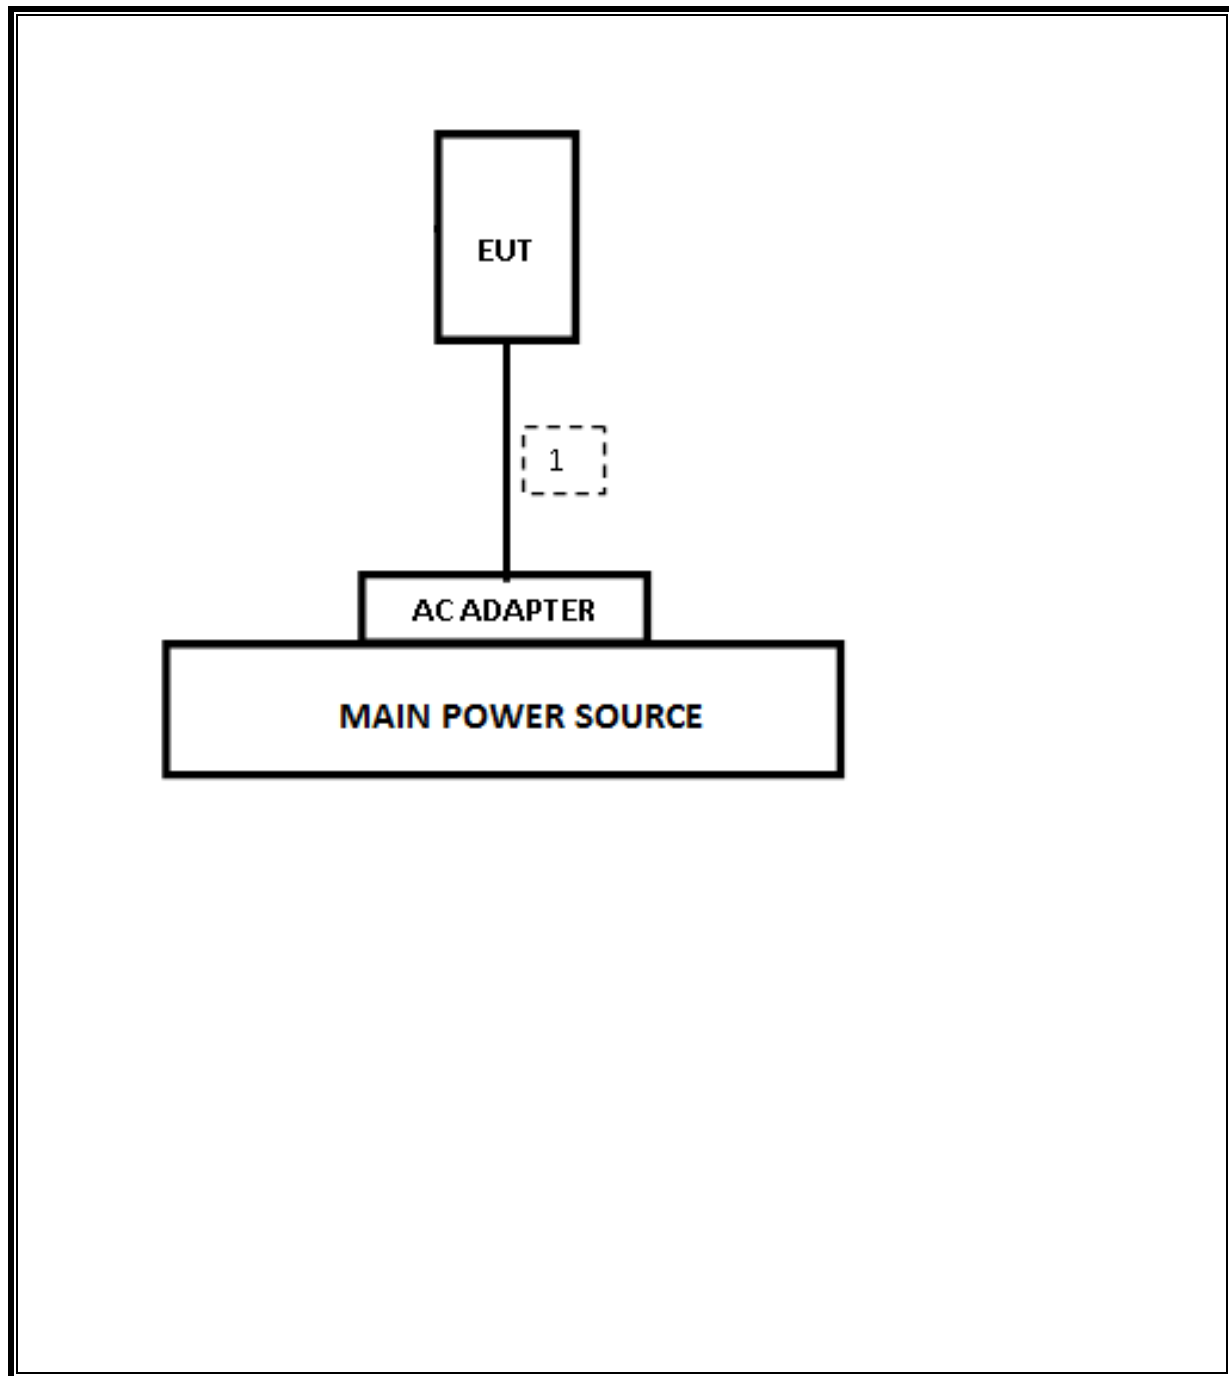

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01052	07/14/13
Antenna, Horn, 18 GHz	EMCO	3115	C00945	06/29/13
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00580	11/11/12
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01016	07/12/13
Horn Antenna, 26.5 GHz	ARA	MWH-1826/B	C00589	07/28/13
Horn Antenna, 40 GHz	ARA	MWH-2640/B	C00981	05/10/13
Preamplifier, 40 GHz	Miteq	NSP4000-SP2	C00990	03/14/13
Reject Filter, 2.0-2.9 GHz	Micro-Tronics	BRM50702	N02684	CNR
High Pass Filter, 7.6 GHz	Micro-Tronics	HPM13195	N02682	CNR
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01159	04/09/13
Peak Power Meter	Agilent	N1911A	1260847C	08/04/12
Peak Power Sensor	Agilent	E9323A	1244073F	08/04/12
Reject Filter, 5.725-5.825 GHz	Micro-Tronics	BRC13192	N02676	CNR
Reject Filter, 2.4-2.5 GHz	Micro-Tronics	BRM50702	N02685	CNR
Highpass Filter, 7.6 GHz	Micro-Tronics	HPM13195	N02682	CNR
EMI Test Receiver, 30MHz	R & S	ESHS 20	N02396	08/19/13
LISN, 30 MHz	FCC	LISN-50/250-25-2	N02625	12/13/12

7. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS

LIMITS

None; for reporting purposes only.

PROCEDURE

KDB 789033 Zero-Span Spectrum Analyzer Method.

7.1.1. ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
802.11a 20 MHz	2.05	2.09	0.982	98.2%	0.08	0.487
802.11n HT20	1.91	1.95	0.982	98.2%	0.08	0.523
802.11n HT40	0.94	0.96	0.981	98.1%	0.08	1.063



7.1.2. MEASUREMENT METHOD FOR POWER AND PPSD


The Duty Cycle is greater than or equal to 98% therefore KDB 789033 Method SA-1 is used.

7.1.3. MEASUREMENT METHOD FOR AVERAGE SPURIOUS EMISSIONS ABOVE 1 GHz

The Duty Cycle is greater than or equal to 98%, KDB 789033 Method VB with Power RMS Averaging is used.

7.1.4. DUTY CYCLE PLOTS

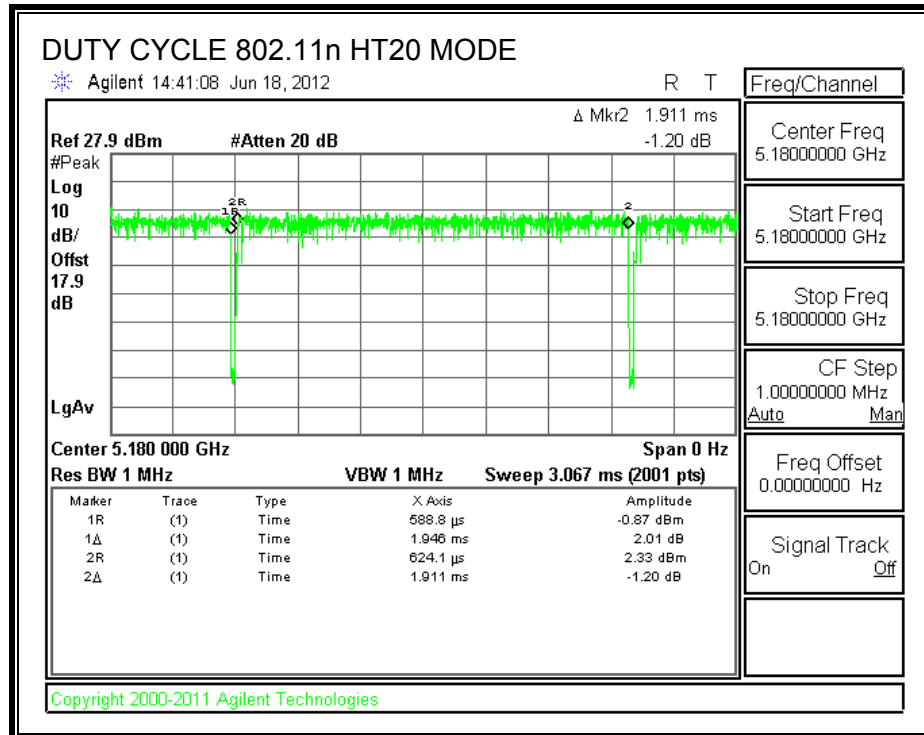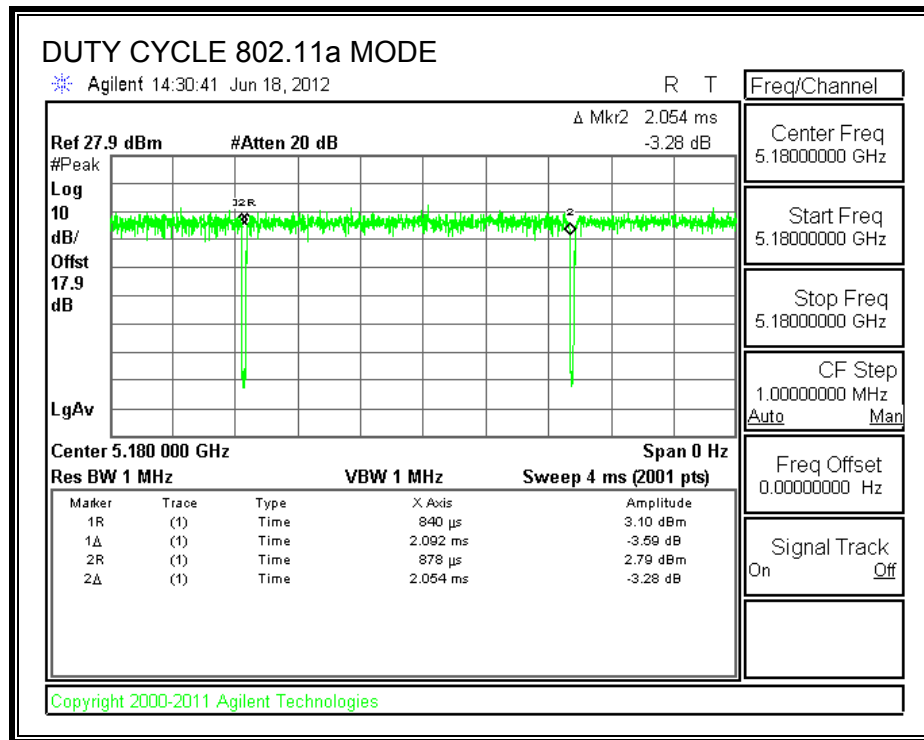

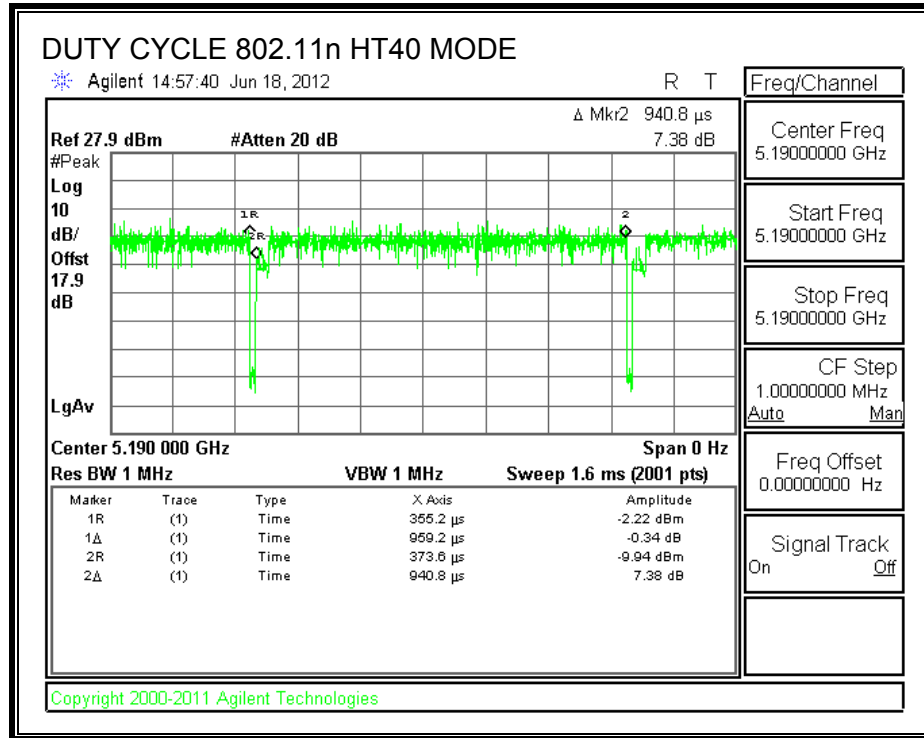

8. ANTENNA PORT TEST RESULTS

8.1. 802.11a MODE IN THE 5.2 GHz BAND

8.1.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5180	19.25
Mid	5200	18.85
High	5240	18.85

26 dB BANDWIDTH

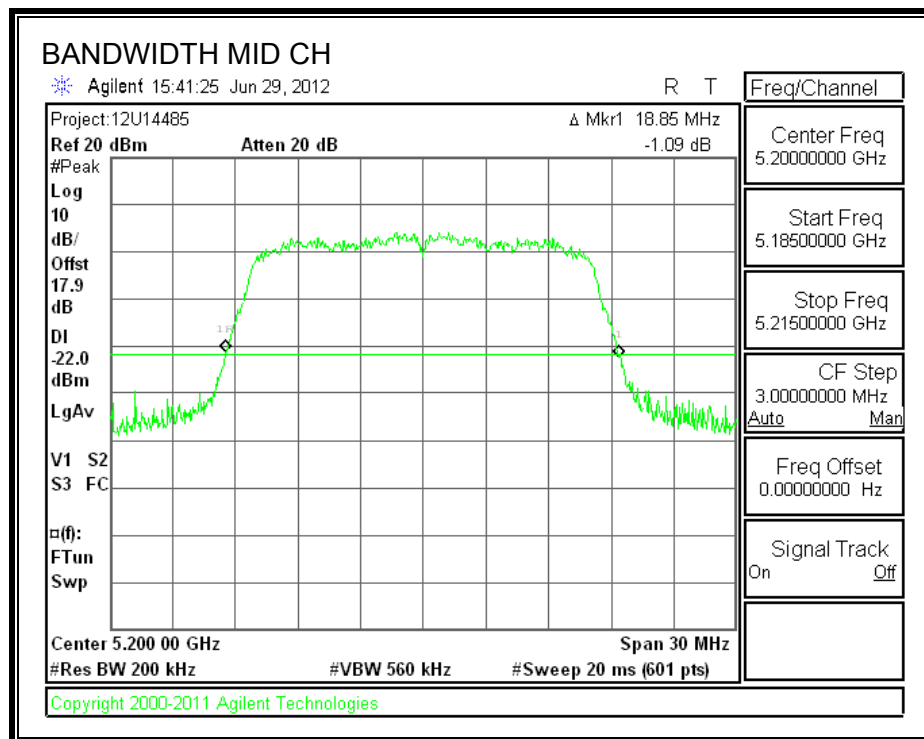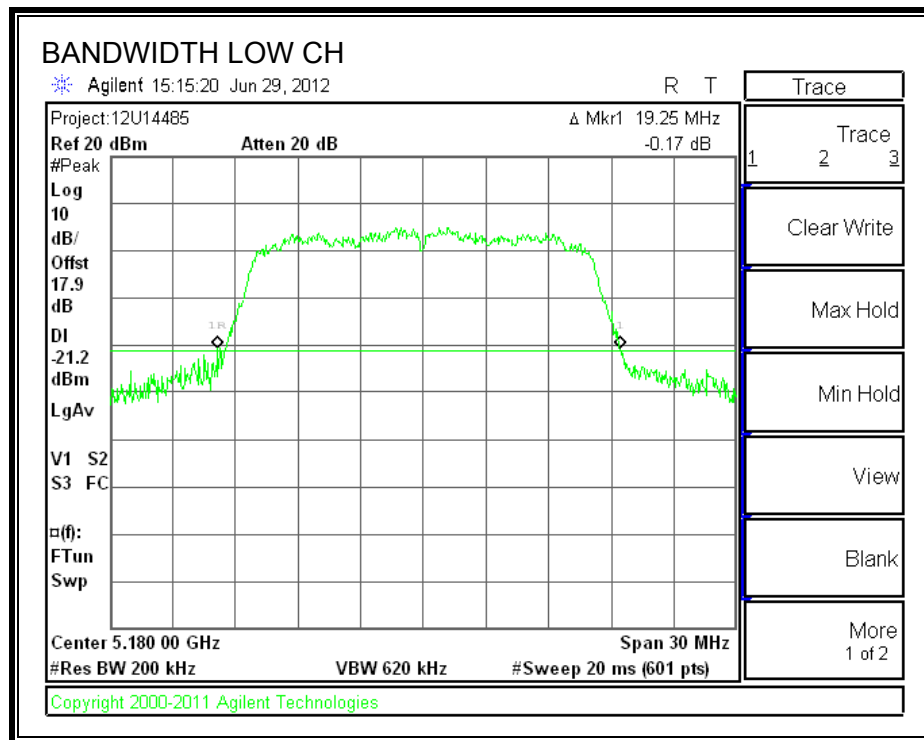

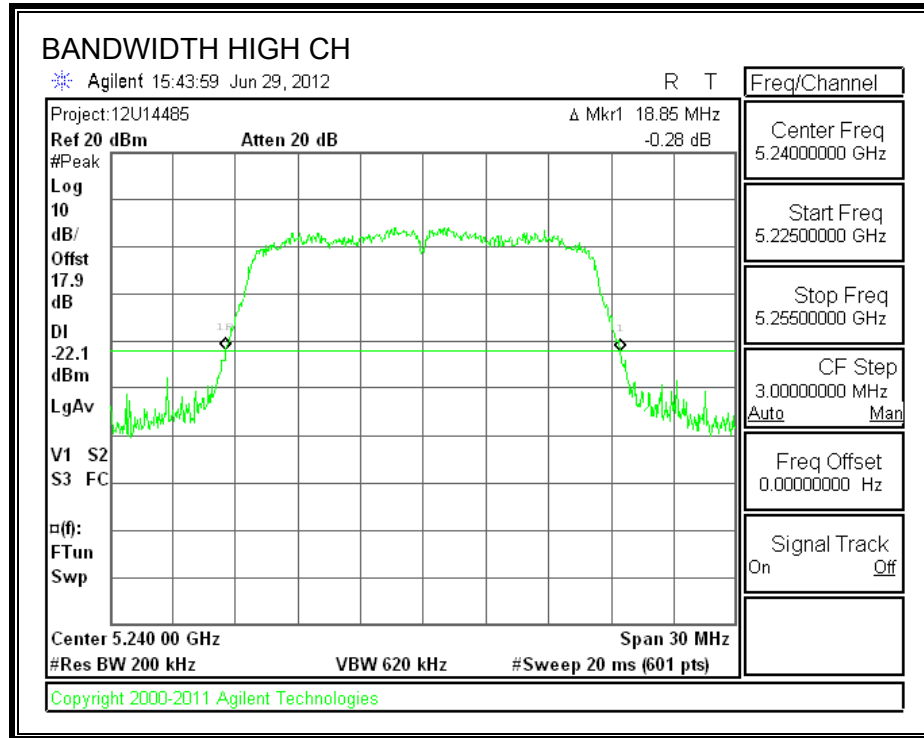

8.1.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5180	16.344
Mid	5200	16.360
High	5240	16.345

99% BANDWIDTH

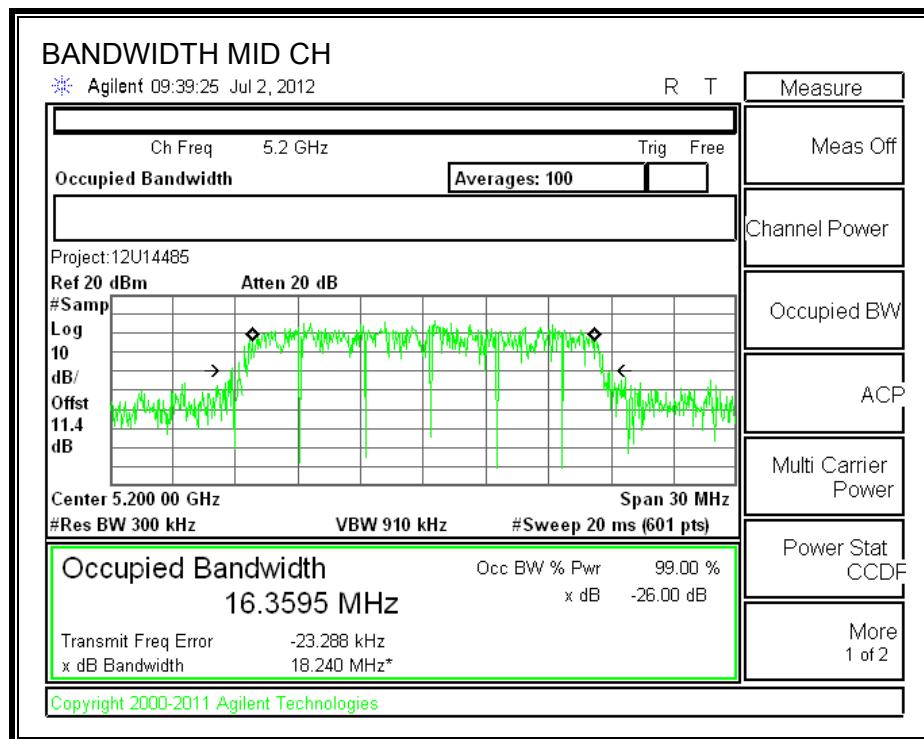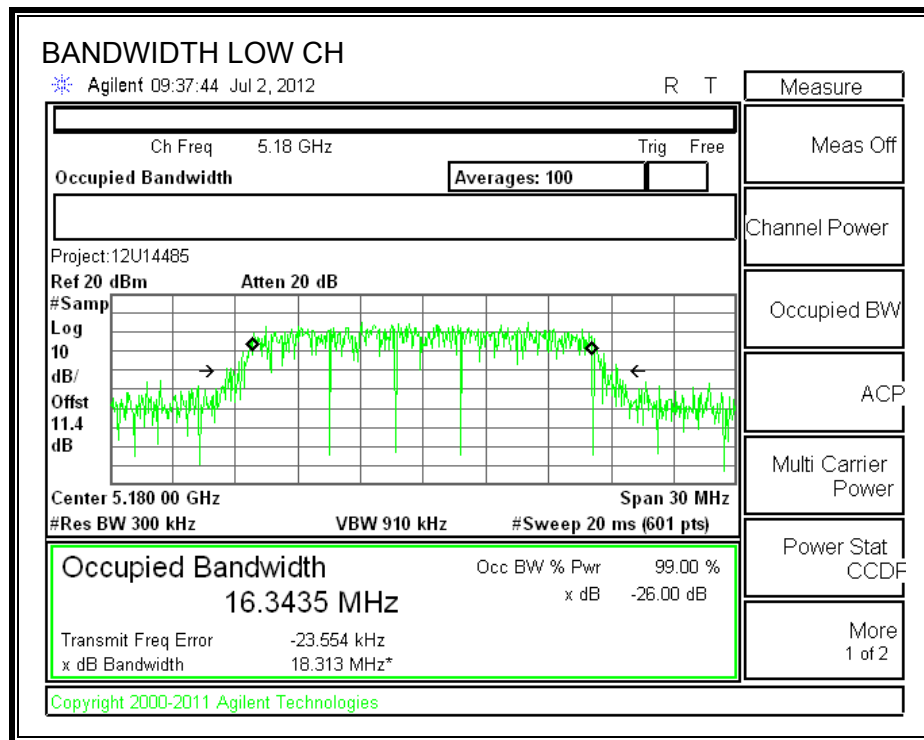

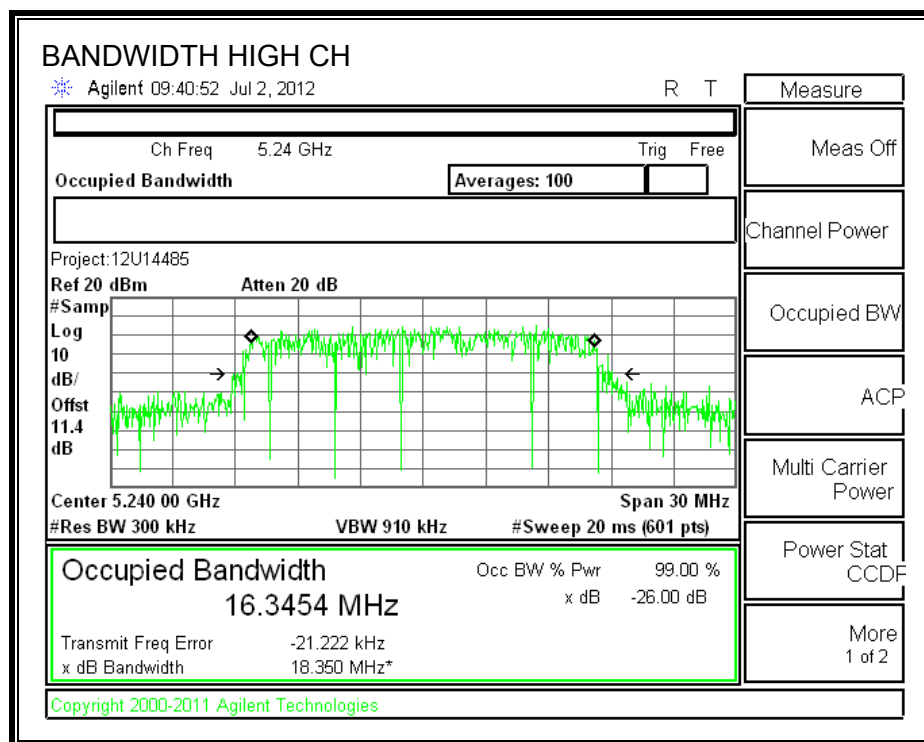

8.1.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11.4 dB (including 10 dB pad and 1.4 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5180	13.95
Mid	5200	14.00
High	5240	14.00

8.1.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1)

IC RSS-210 A9.2 (1)

FCC §15.407 (a) (1):

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

IC RSS-210 A9.2 (1):

For the 5.15 – 5.25 GHz band, The maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

FCC RESULTS

Limits

Channel	Frequency (MHz)	Fixed Limit (dBm)	B (MHz)	4 + 10 Log B Limit (dBm)	Directional Gain (dBi)	Power Limit (dBm)	PPSD Limit (dBm)
Low	5180	17	19.3	16.84	1.41	16.84	4.00
Mid	5200	17	18.9	16.75	1.41	16.75	4.00
High	5240	17	18.9	16.75	1.41	16.75	4.00

Duty Cycle CF (dB)	0.08	Included in Calculations of Corr'd Power &PPSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	14.02	14.10	16.84	-2.75
Mid	5200	13.93	14.01	16.75	-2.74
High	5240	14.16	14.24	16.75	-2.52

PPSD Results

Channel	Frequency (MHz)	Meas PPSD (dBm)	Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5180	3.57	3.65	4.00	-0.35
Mid	5200	3.55	3.63	4.00	-0.37
High	5240	3.70	3.78	4.00	-0.22

IC RESULTS

Limits

Channel	Frequency (MHz)	Fixed Limit (dBm)	B (MHz)	10 + 10 Log B EIRP Limit (dBm)	Directional Gain (dBi)	Power Limit (dBm)	PPSD Limit (dBm)
Low	5180	17	16.3	22.13	1.41	17.00	4.00
Mid	5200	17	16.4	22.14	1.41	17.00	4.00
High	5240	17	16.3	22.13	1.41	17.00	4.00

Duty Cycle CF (dB)	0.08	Included in Calculations of Corr'd Power & PPSP
--------------------	------	---



Output Power Results


Channel	Frequency (MHz)	Meas Power (dBm)	Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	14.02	14.10	17.00	-2.90
Mid	5200	13.93	14.01	17.00	-2.99
High	5240	14.16	14.24	17.00	-2.76

PPSD Results

Channel	Frequency (MHz)	Meas PPSD (dBm)	Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5180	3.57	3.65	4.00	-0.35
Mid	5200	3.55	3.63	4.00	-0.37
High	5240	3.70	3.78	4.00	-0.22

OUTPUT POWER AND PPSD

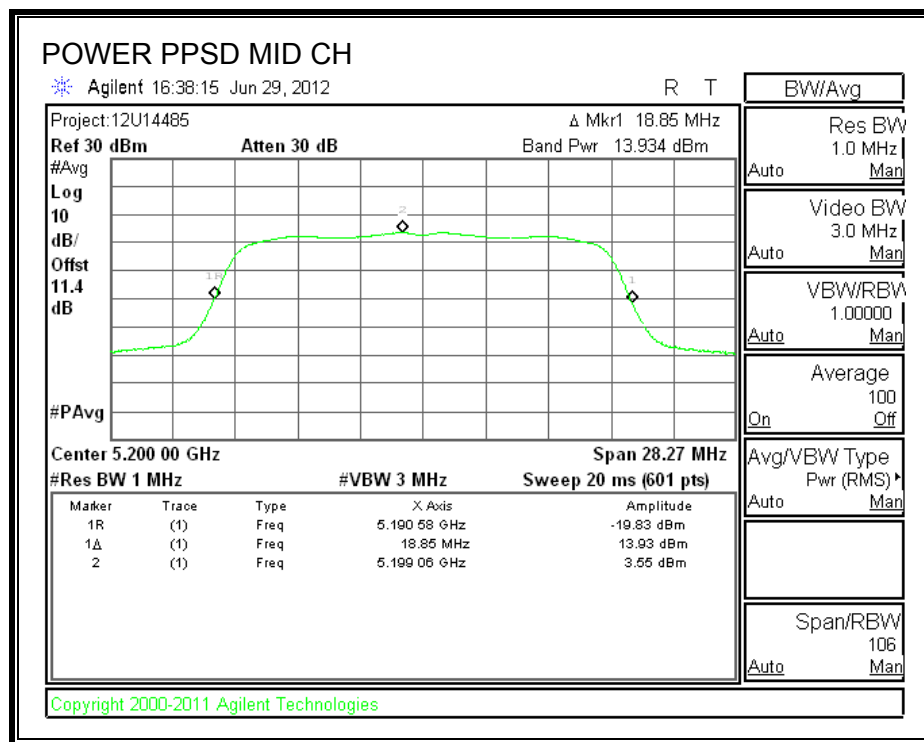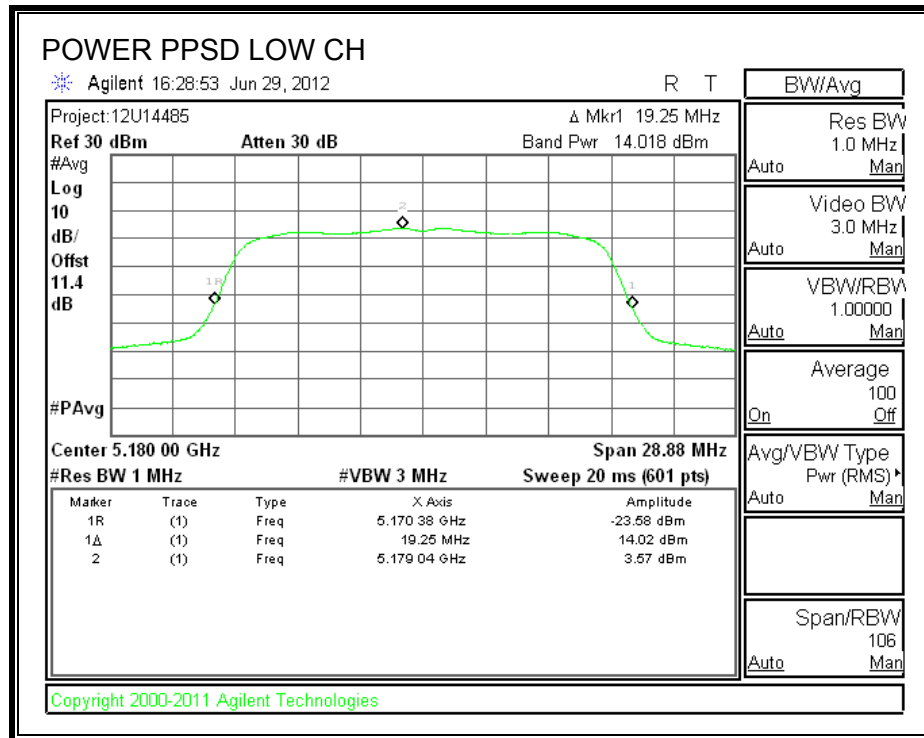

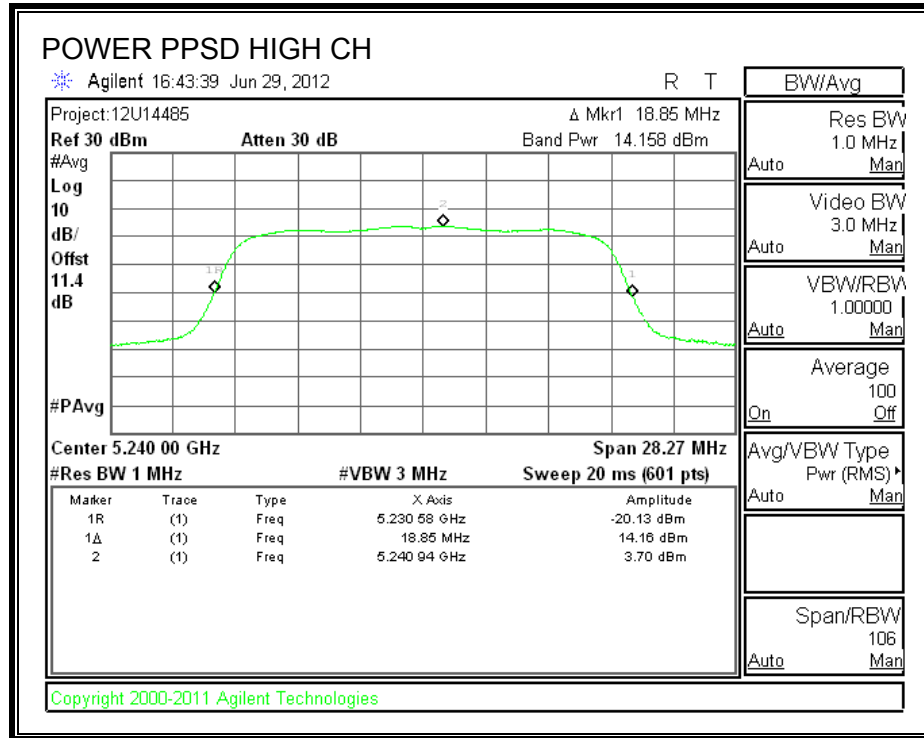

8.1.5. PEAK EXCURSION

LIMITS



FCC §15.407 (a) (6)


The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

RESULTS

Channel	Frequency (MHz)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Low	5180	10.48	13	-2.52
Mid	5200	9.36	13	-3.64
High	5240	8.66	13	-4.34

PEAK EXCURSION

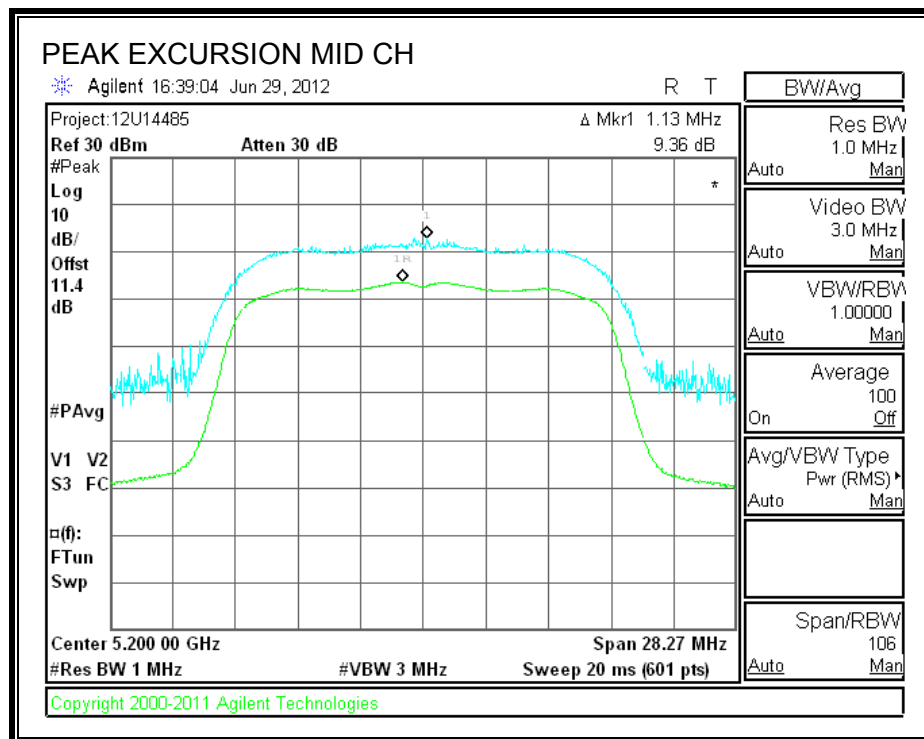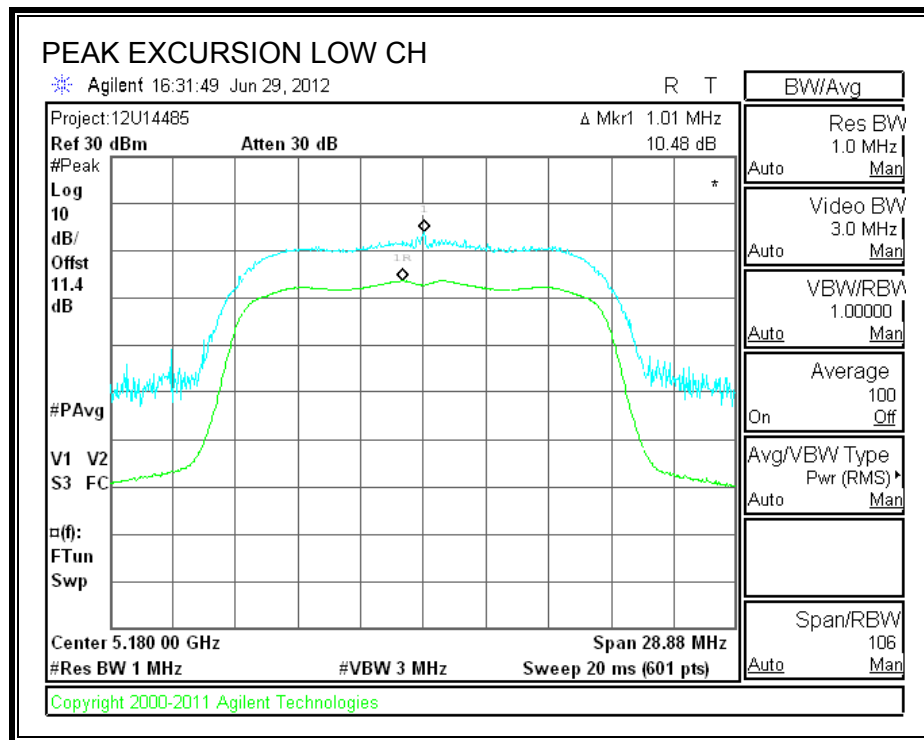

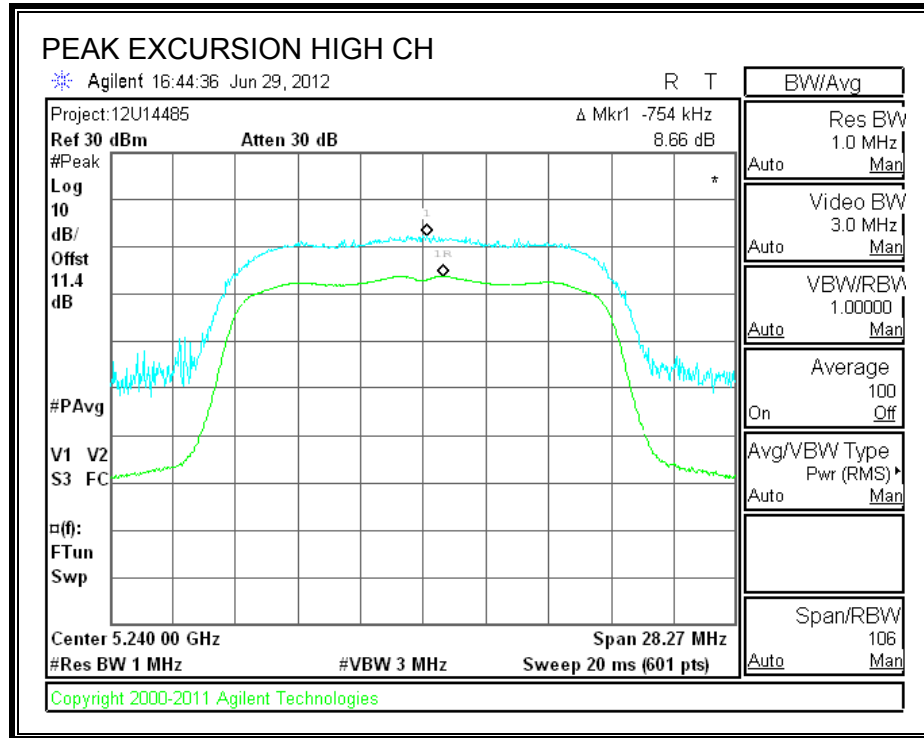

8.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND

8.2.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5180	19.15
Mid	5200	19.20
High	5240	19.35

26 dB BANDWIDTH

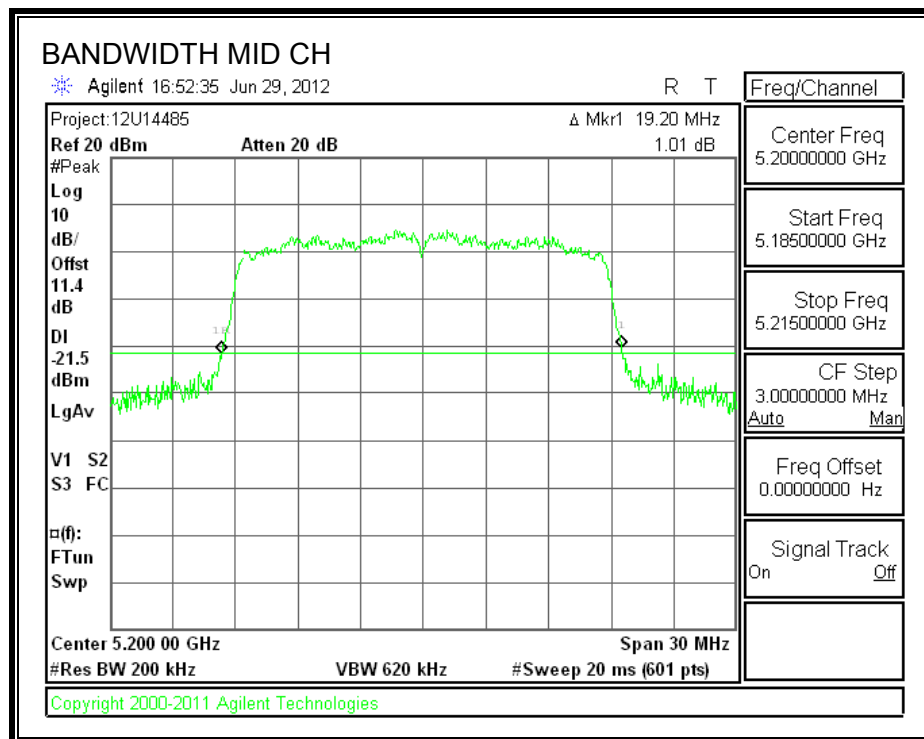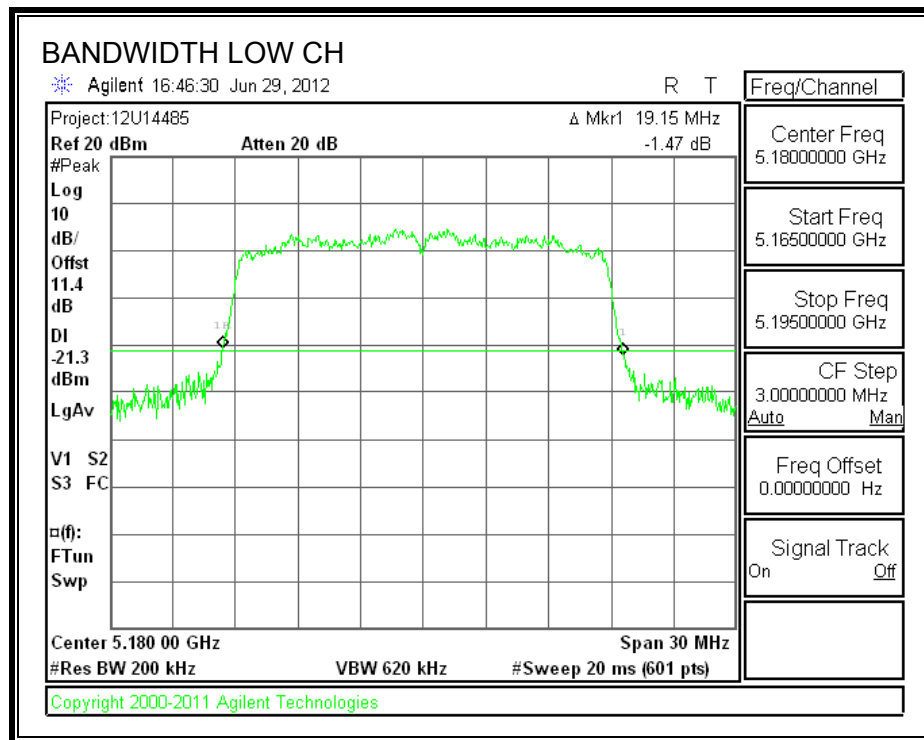

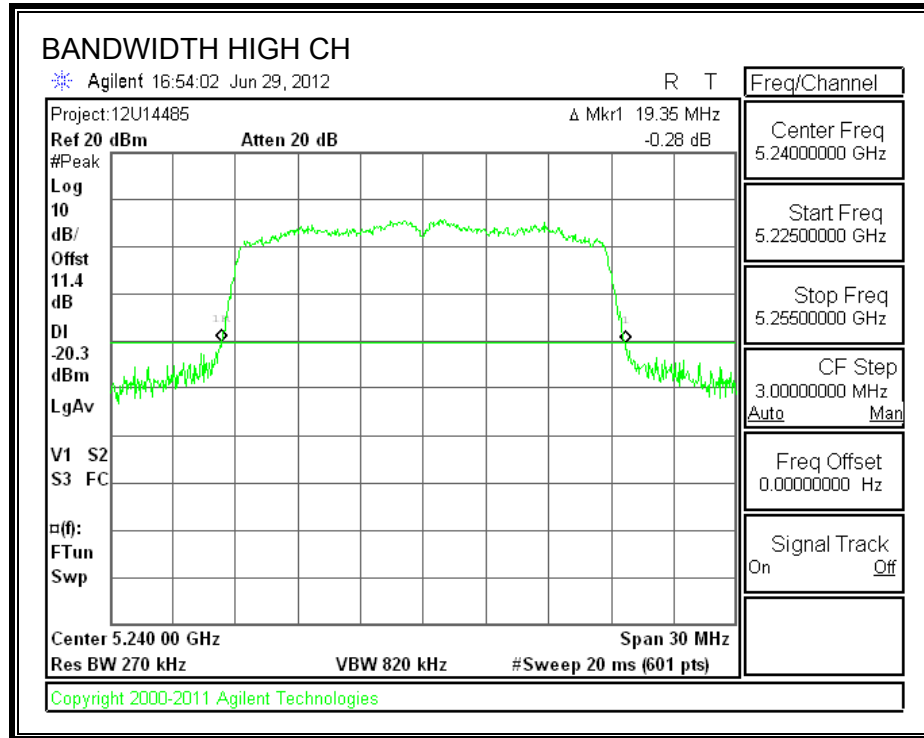

8.2.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5180	17.529
Mid	5200	17.531
High	5240	17.537

99% BANDWIDTH

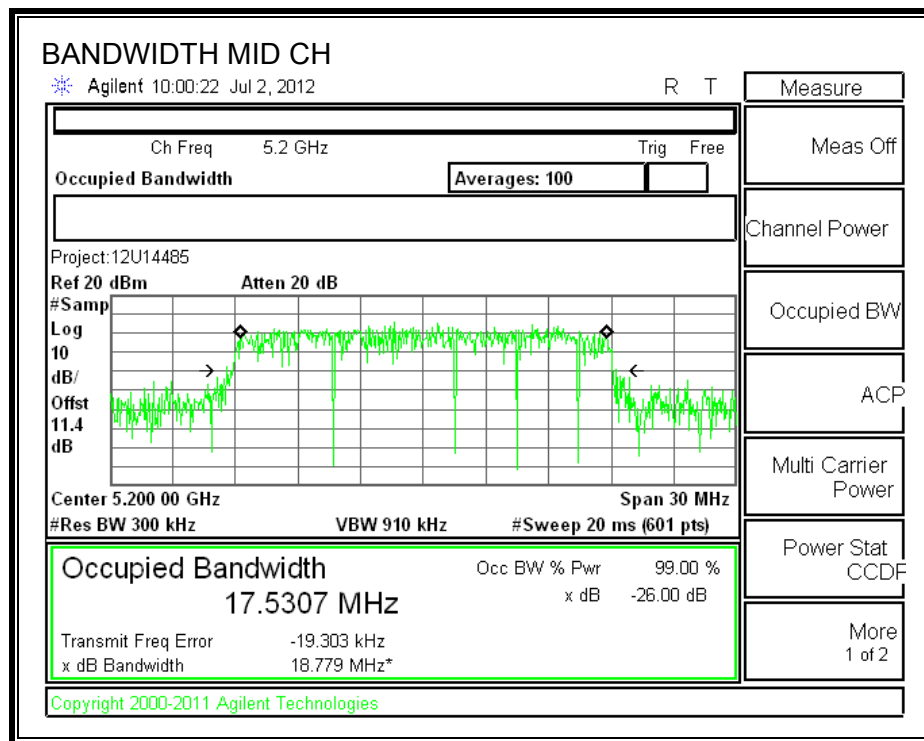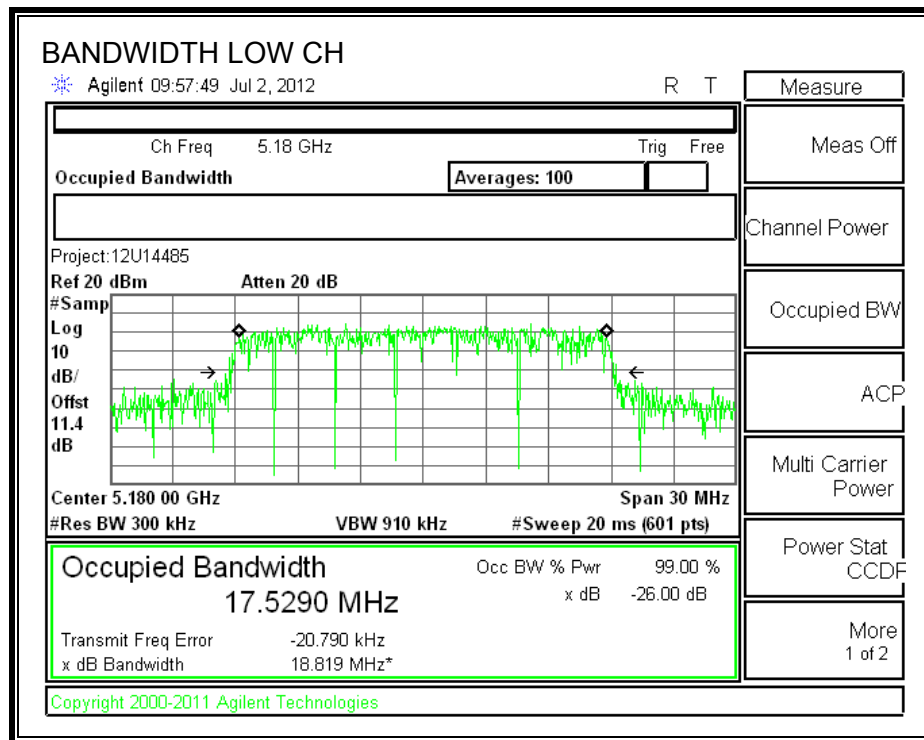

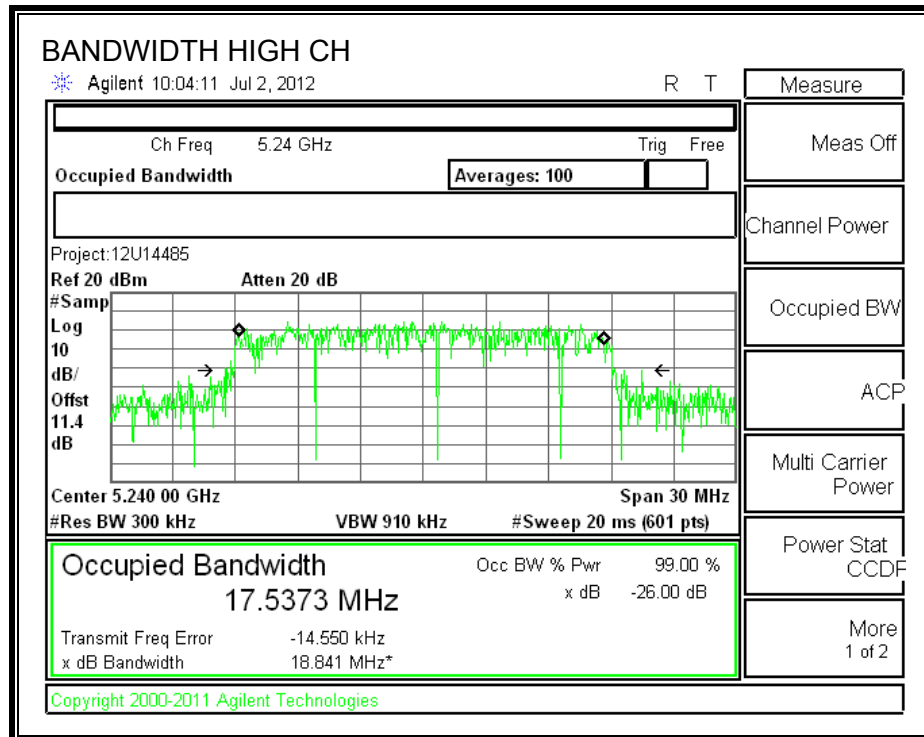

8.2.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11.4 dB (including 10 dB pad and 1.4 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5180	14.00
Mid	5200	13.97
High	5240	13.99

8.2.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1)

IC RSS-210 A9.2 (1)

FCC §15.407 (a) (1):

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

IC RSS-210 A9.2 (1):

For the 5.15 – 5.25 GHz band, The maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

FCC RESULTS

Limits

Channel	Frequency (MHz)	Fixed Limit (dBm)	B (MHz)	4 + 10 Log B Limit (dBm)	Directional Gain (dBi)	Power Limit (dBm)	PPSD Limit (dBm)
Low	5180	17	19.2	16.82	1.41	16.82	4.00
Mid	5200	17	19.2	16.83	1.41	16.83	4.00
High	5240	17	19.4	16.87	1.41	16.87	4.00

Duty Cycle CF (dB)	0.08	Included in Calculations of Corr'd Power &PPSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	14.27	14.35	16.82	-2.47
Mid	5200	14.13	14.21	16.83	-2.63
High	5240	14.25	14.33	16.87	-2.54

PPSD Results

Channel	Frequency (MHz)	Meas PPSD (dBm)	Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5180	3.61	3.69	4.00	-0.31
Mid	5200	3.54	3.62	4.00	-0.38
High	5240	3.69	3.77	4.00	-0.23

IC RESULTS

Limits

Channel	Frequency (MHz)	Fixed Limit (dBm)	B (MHz)	10 + 10 Log B EIRP Limit (dBm)	Directional Gain (dBi)	Power Limit (dBm)	PPSD Limit (dBm)
Low	5180	17	17.5	22.44	1.41	17.00	4.00
Mid	5200	17	17.5	22.44	1.41	17.00	4.00
High	5240	17	17.5	22.44	1.41	17.00	4.00

Duty Cycle CF (dB)	0.08	Included in Calculations of Corr'd Power & PPSP
--------------------	------	---



Output Power Results


Channel	Frequency (MHz)	Meas Power (dBm)	Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	14.27	14.35	17.00	-2.65
Mid	5200	14.13	14.21	17.00	-2.79
High	5240	14.25	14.33	17.00	-2.67

PPSD Results

Channel	Frequency (MHz)	Meas PPSD (dBm)	Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5180	3.61	3.69	4.00	-0.31
Mid	5200	3.54	3.62	4.00	-0.38
High	5240	3.69	3.77	4.00	-0.23

OUTPUT POWER AND PPSD

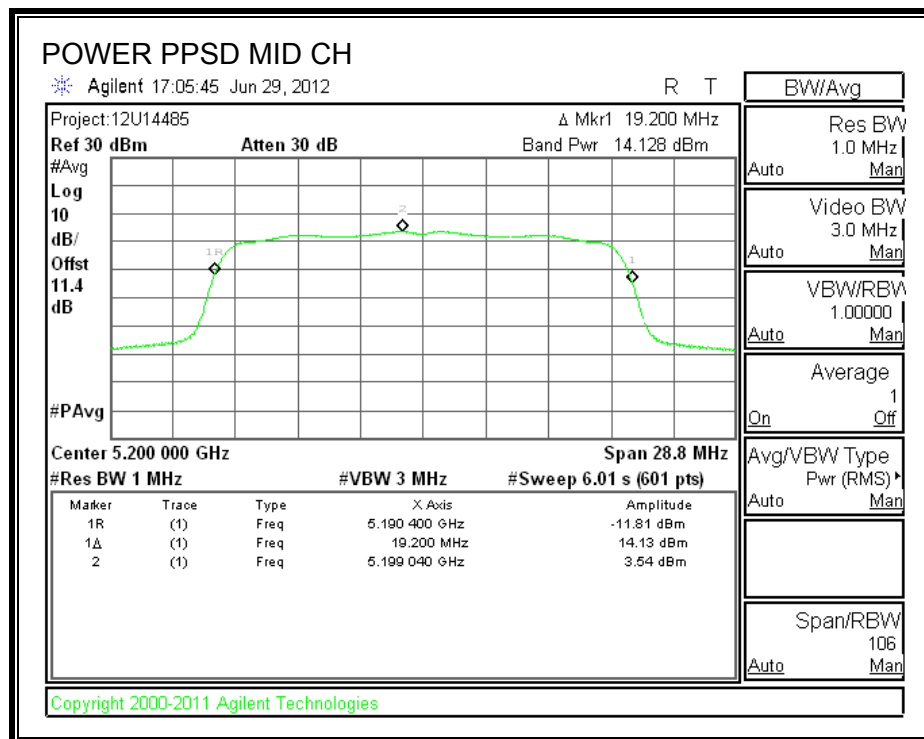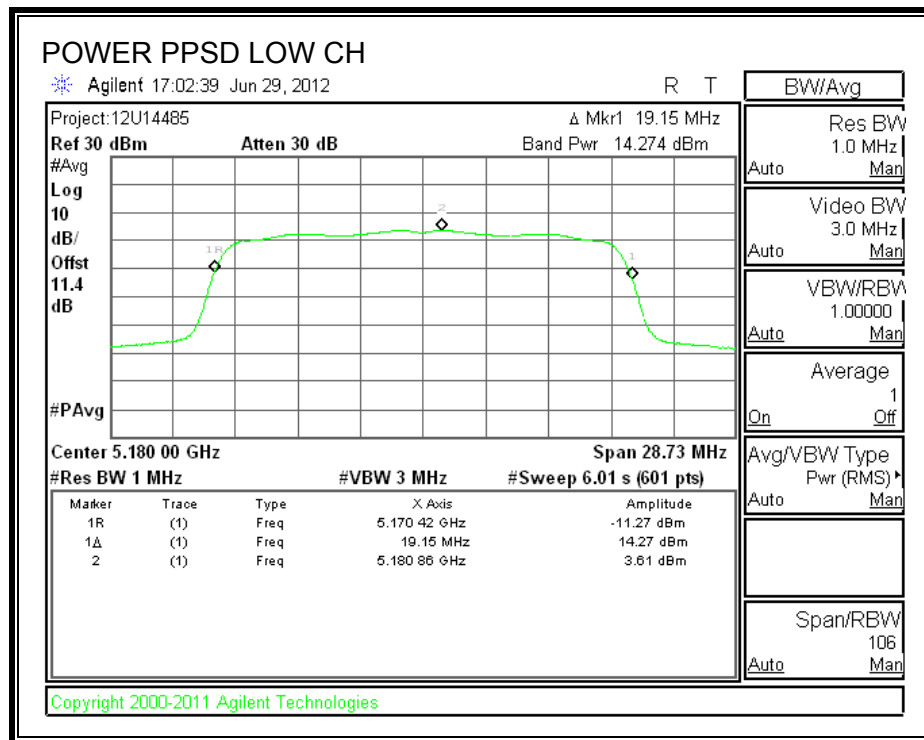

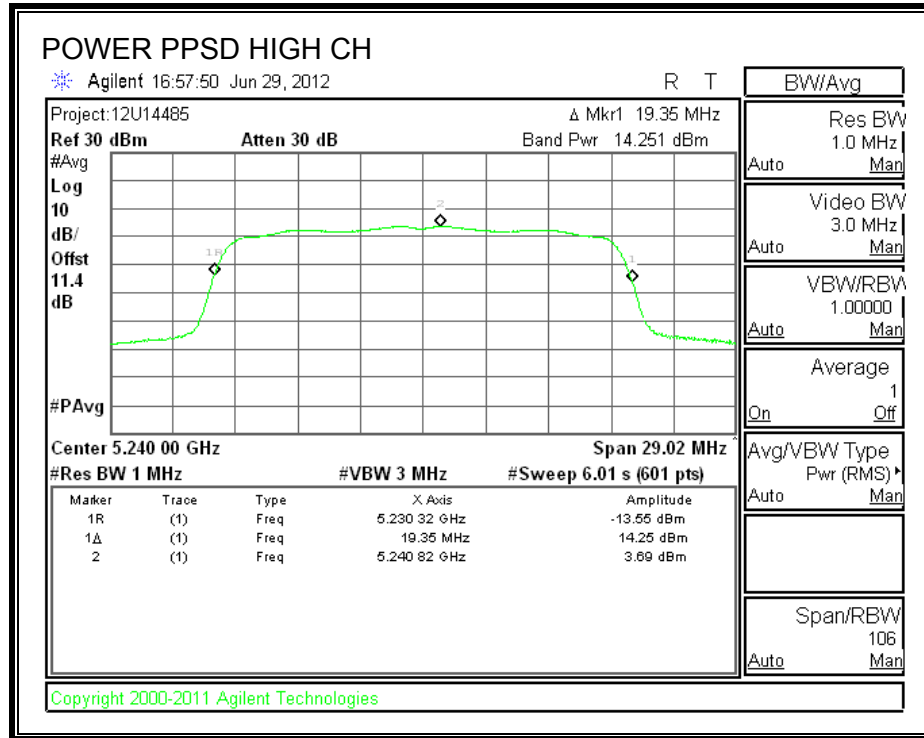

8.2.5. PEAK EXCURSION

LIMITS



FCC §15.407 (a) (6)


The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

RESULTS

Channel	Frequency (MHz)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Low	5180	8.80	13	-4.20
Mid	5200	9.26	13	-3.74
High	5240	8.96	13	-4.04

PEAK EXCURSION

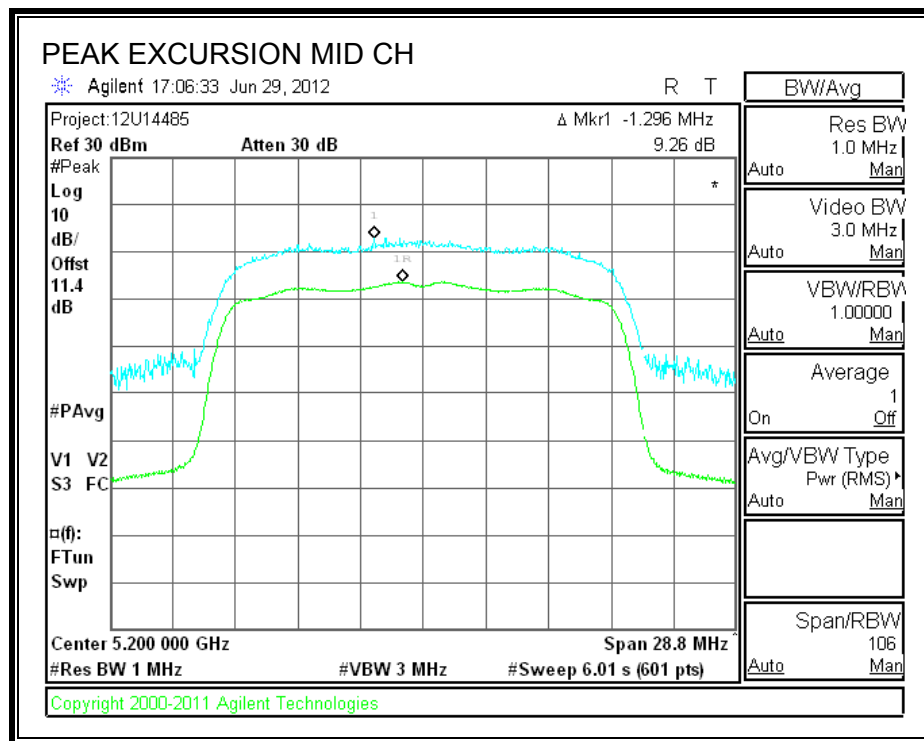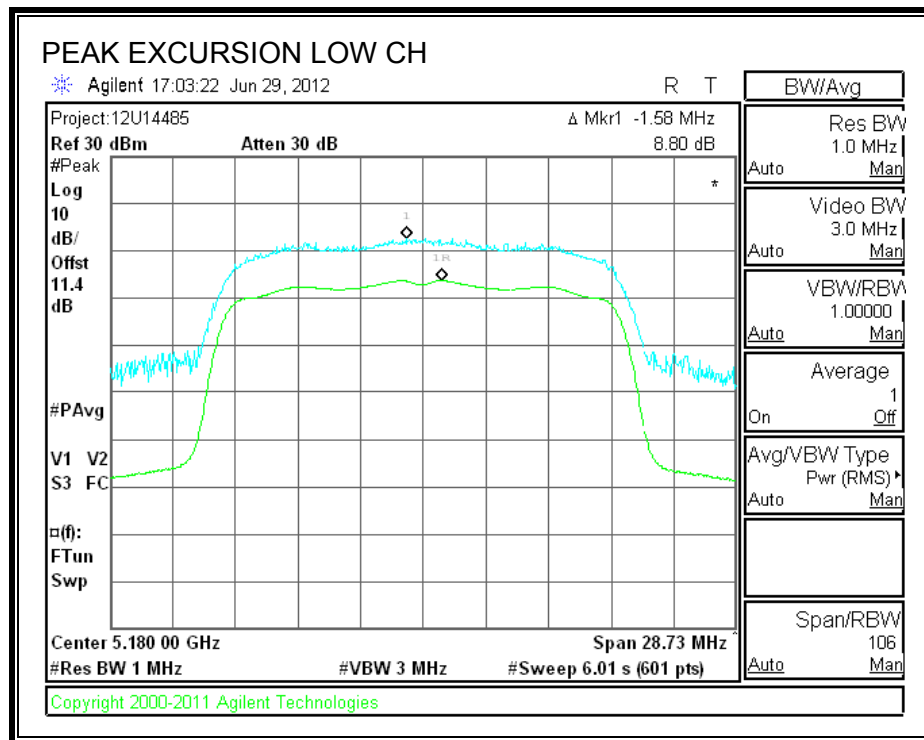

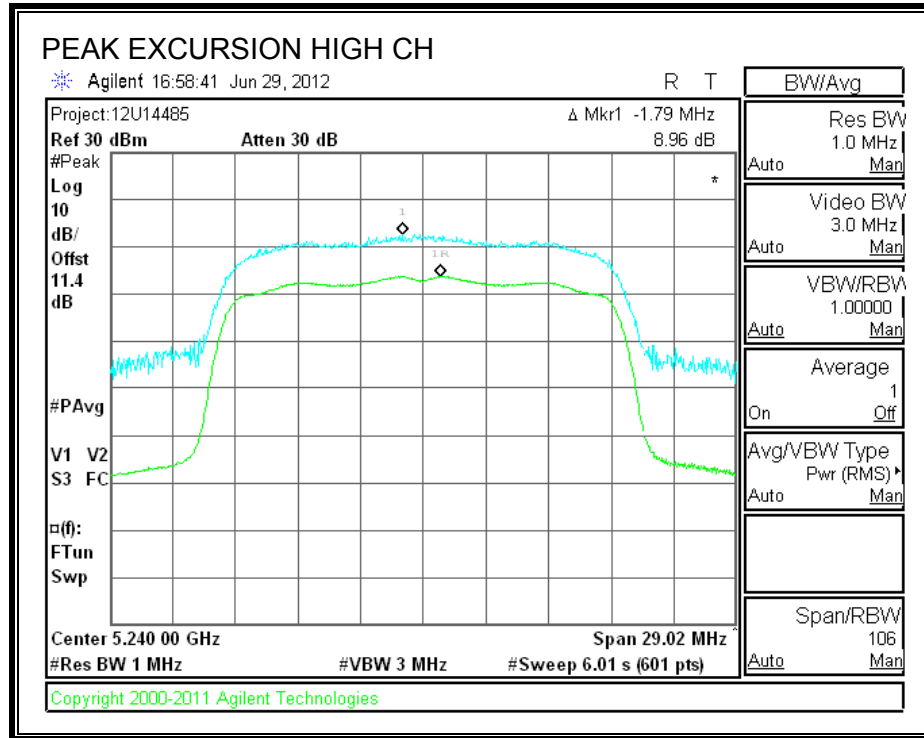

8.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND

8.3.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5190	44.6
High	5230	45.3

26 dB BANDWIDTH

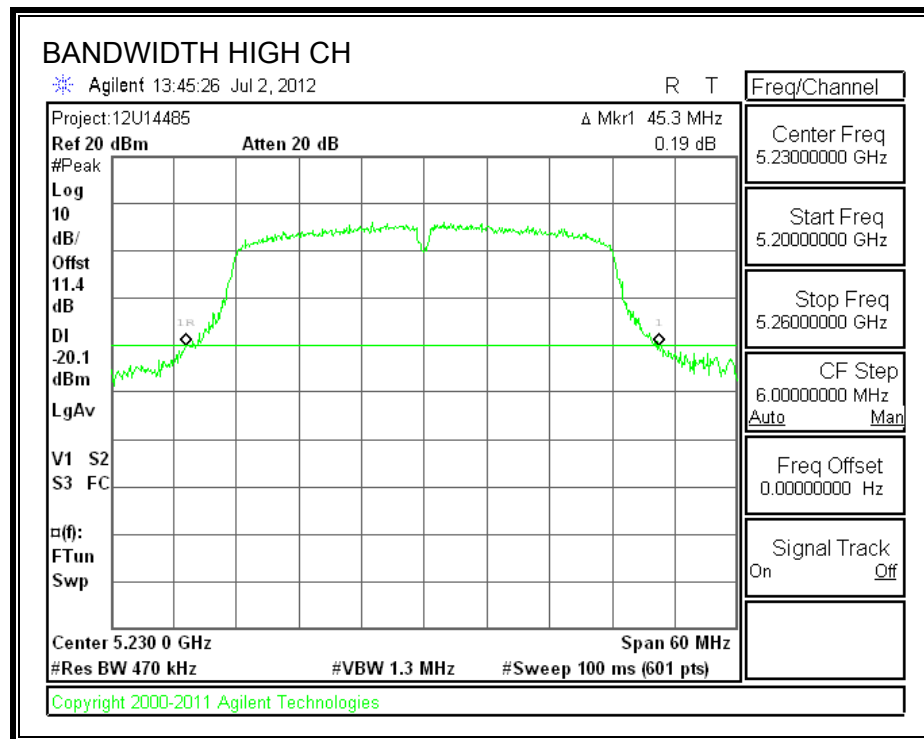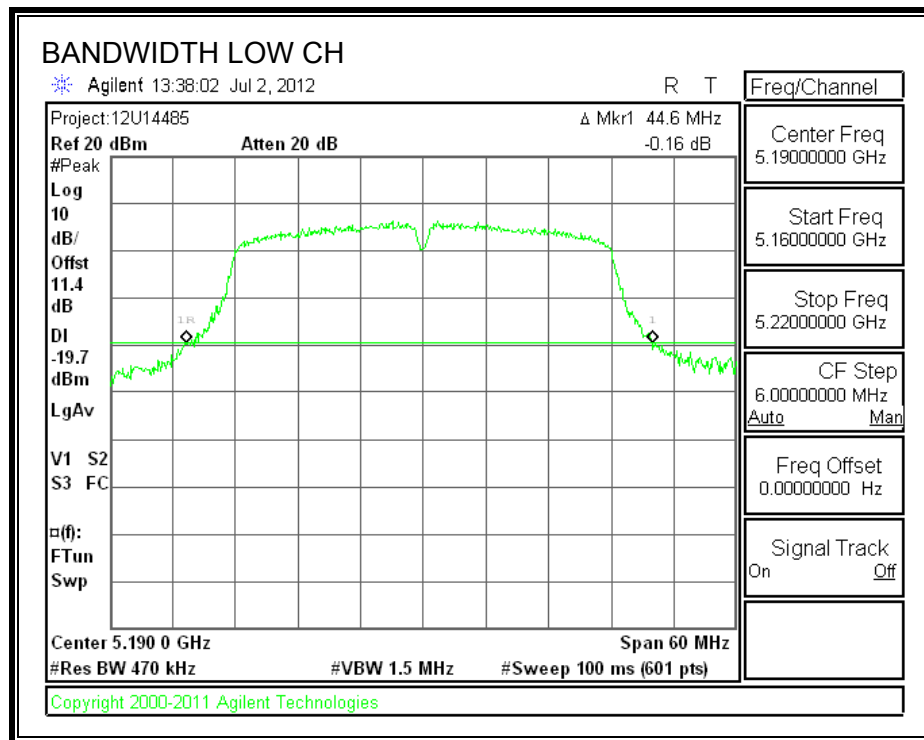

8.3.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5190	35.857
High	5230	35.889

99% BANDWIDTH

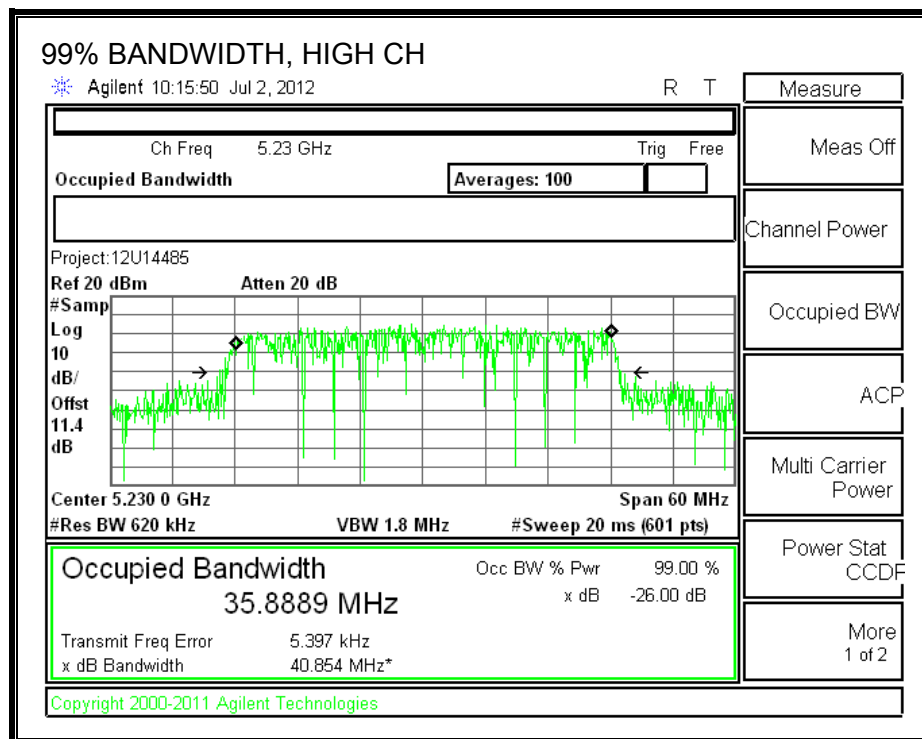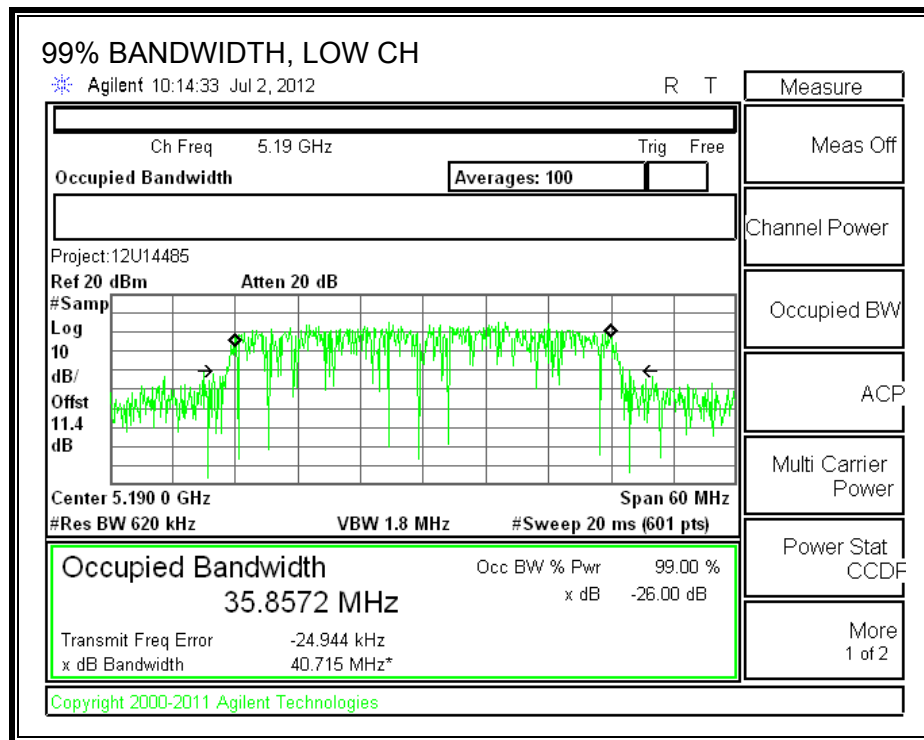

8.3.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11.4 dB (including 10 dB pad and 1.4 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5190	13.95
High	5230	13.96

8.3.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1)

IC RSS-210 A9.2 (1)

FCC §15.407 (a) (1):

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

IC RSS-210 A9.2 (1):

For the 5.15 – 5.25 GHz band, The maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

FCC RESULTS

Limits

Channel	Frequency (MHz)	Fixed Limit (dBm)	B (MHz)	4 + 10 Log B Limit (dBm)	Directional Gain (dBi)	Power Limit (dBm)	PPSD Limit (dBm)
Low	5190	17	44.6	20.49	1.41	17.00	4.00
High	5230	17	45.3	20.56	1.41	17.00	4.00

Duty Cycle CF (dB)	0.08	Included in Calculations of Corr'd Power & PPSP
--------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	14.96	15.04	17.00	-1.96
High	5230	14.75	14.83	17.00	-2.18

PPSD Results

Channel	Frequency (MHz)	Meas PPSD (dBm)	Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5190	0.94	1.02	4.00	-2.98
High	5230	0.69	0.77	4.00	-3.23

IC RESULTS

Limits

Channel	Frequency (MHz)	Fixed Limit (dBm)	B (MHz)	10 + 10 Log B EIRP Limit (dBm)	Directional Gain (dBi)	Power Limit (dBm)	PPSD Limit (dBm)
Low	5190	17	35.9	25.55	1.41	17.00	4.00
High	5230	17	35.9	25.55	1.41	17.00	4.00

Duty Cycle CF (dB)	0.08	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	14.96	15.04	17.00	-1.96
High	5230	14.75	14.83	17.00	-2.18

PPSD Results

Channel	Frequency (MHz)	Meas PPSD (dBm)	Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5190	0.94	1.02	4.00	-2.98
High	5230	0.69	0.77	4.00	-3.23

OUTPUT POWER AND PPSD

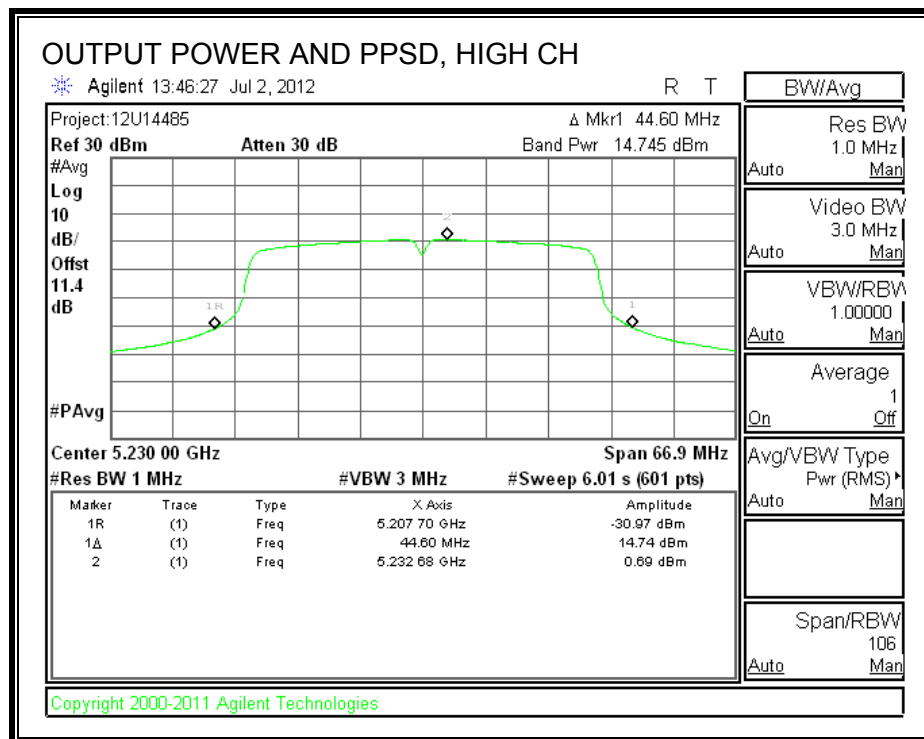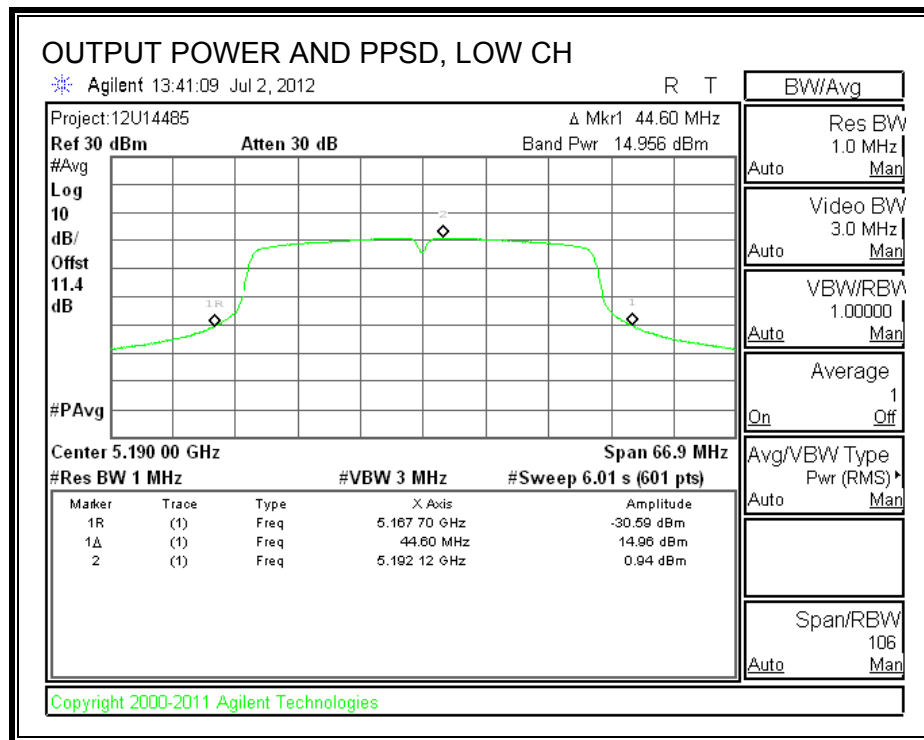

8.3.5. PEAK EXCURSION

LIMITS



FCC §15.407 (a) (6)

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

RESULTS

Channel	Frequency (MHz)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Low	5190	9.95	13	-3.05
High	5230	9.10	13	-3.90

PEAK EXCURSION

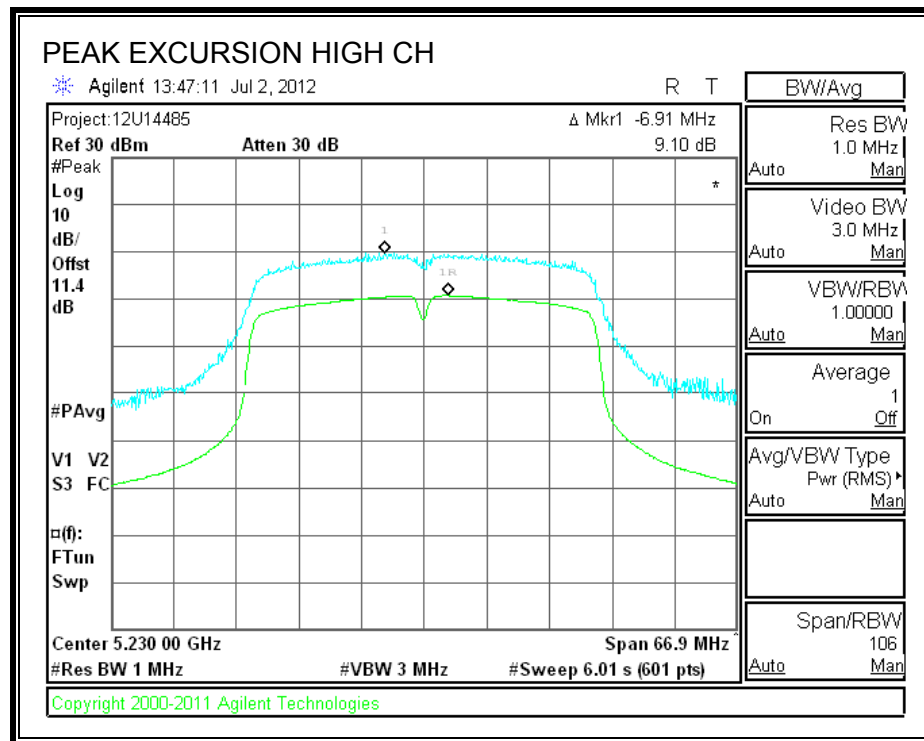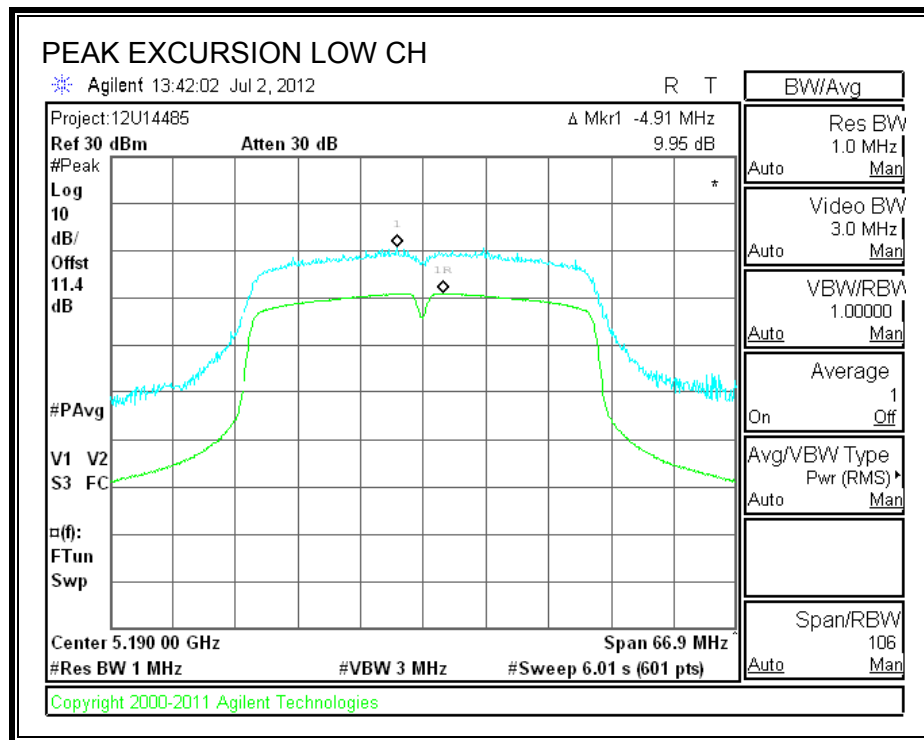

8.4. 802.11a MODE IN THE 5.3 GHz BAND

8.4.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5260	19.65
Mid	5300	19.80
High	5320	19.75

26 dB BANDWIDTH

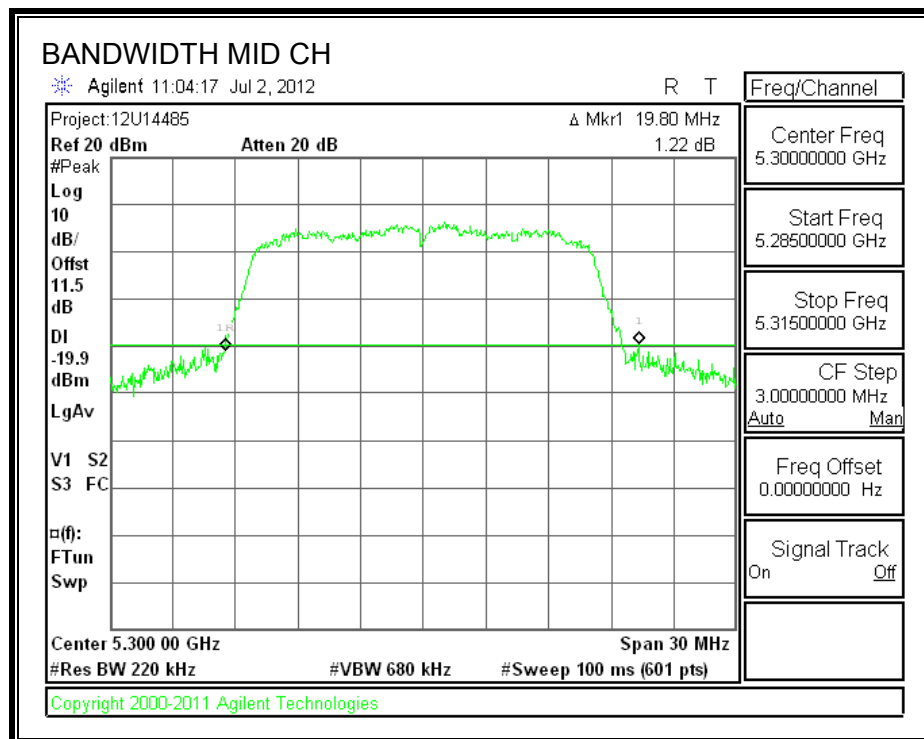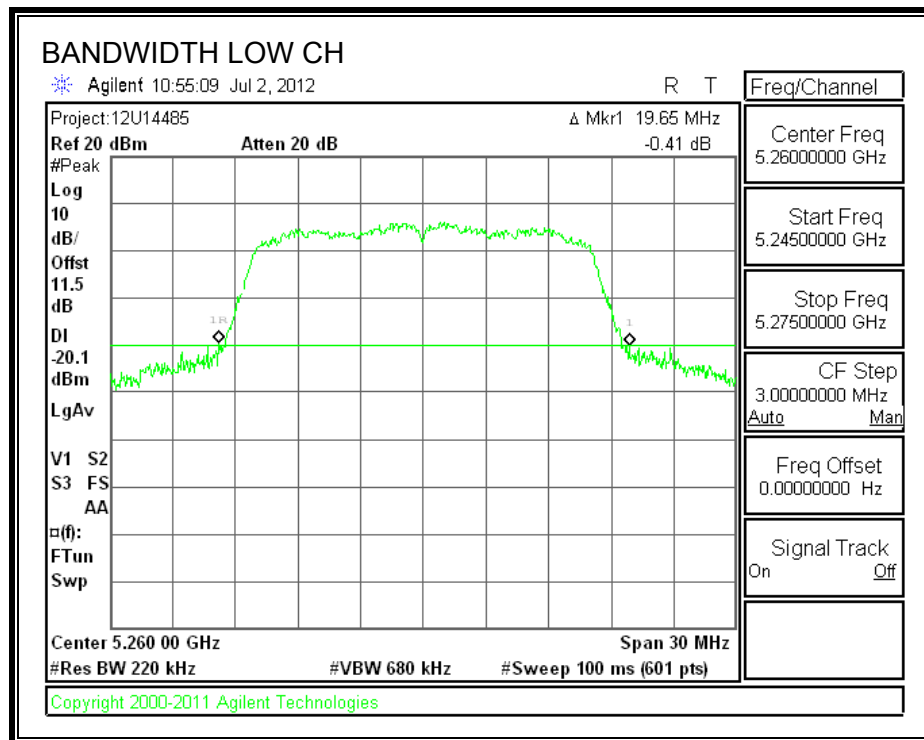

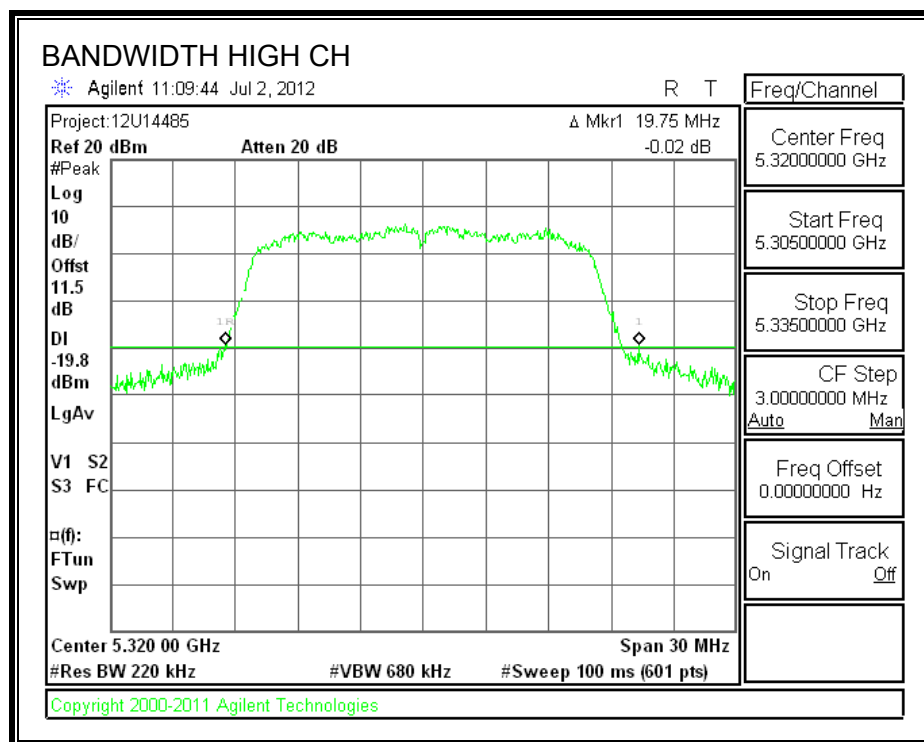

8.4.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5260	16.337
Mid	5300	16.341
High	5320	16.347

99% BANDWIDTH

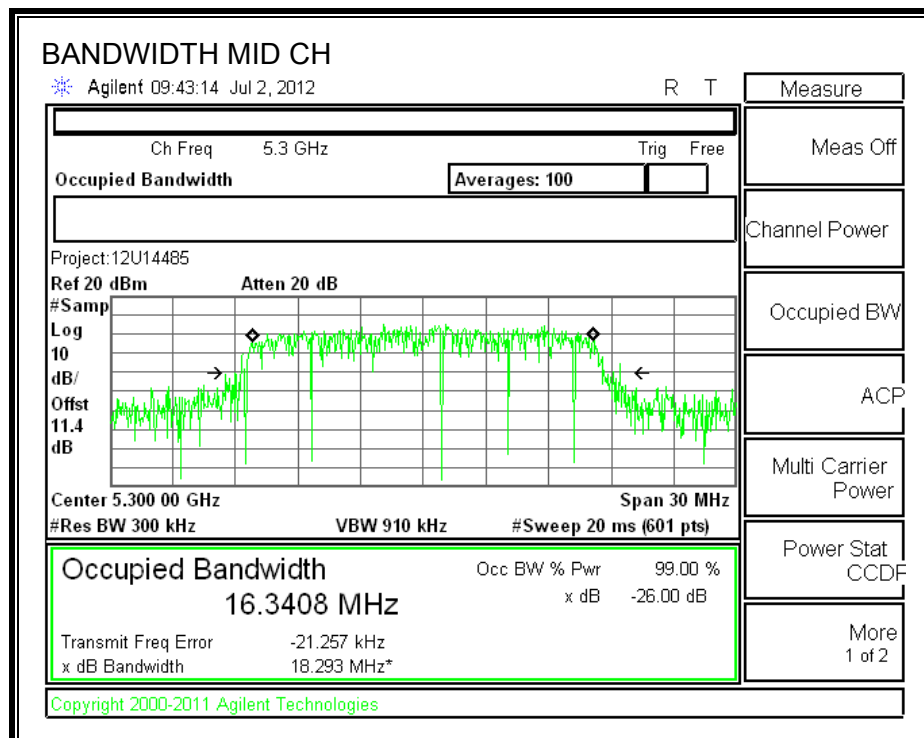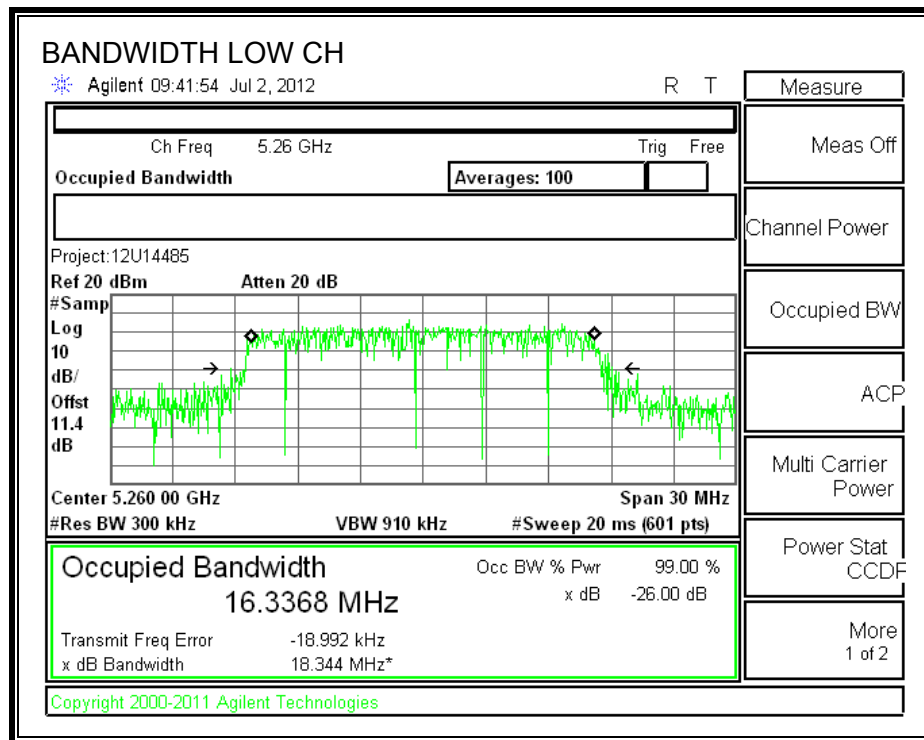

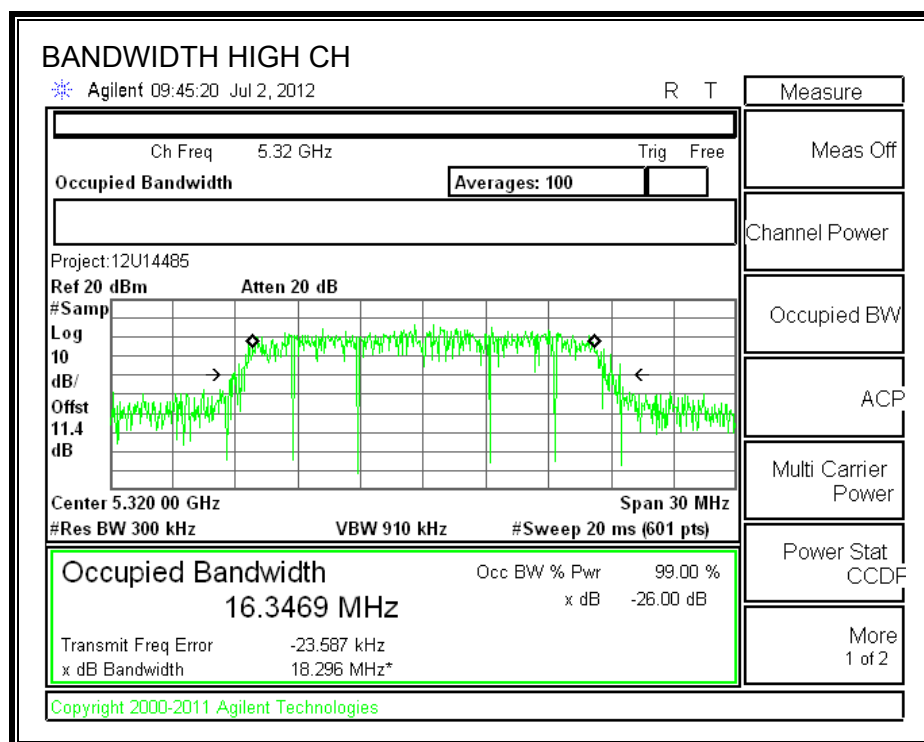

8.4.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11.4 dB (including 10 dB pad and 1.4 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5260	13.45
Mid	5300	13.50
High	5320	13.47

8.4.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (2)

IC RSS-210 A9.2 (2)

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 99% emission bandwidth for IC (26dB emission bandwidth for FCC) in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

99% bandwidth was used to calculate the power limit which was considered the worst case.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Limits

Channel	Frequency (MHz)	Fixed Limit (dBm)	B (MHz)	11 + 10 Log B Limit (dBm)	Directional Gain (dBi)	Power Limit (dBm)	PPSD Limit (dBm)
Low	5260	24	16.3	23.13	1.35	23.13	11.00
Mid	5300	24	16.3	23.13	1.35	23.13	11.00
High	5320	24	16.3	23.13	1.35	23.13	11.00

Duty Cycle CF (dB)	0.08	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



Output Power Results


Channel	Frequency (MHz)	Meas Power (dBm)	Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	15.01	15.09	23.13	-8.04
Mid	5300	14.90	14.98	23.13	-8.16
High	5320	14.96	15.04	23.13	-8.09

PPSD Results

Channel	Frequency (MHz)	Meas PPSD (dBm)	Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5260	5.54	5.62	11.00	-5.38
Mid	5300	4.44	4.52	11.00	-6.48
High	5320	4.52	4.60	11.00	-6.40

OUTPUT POWER AND PPSD

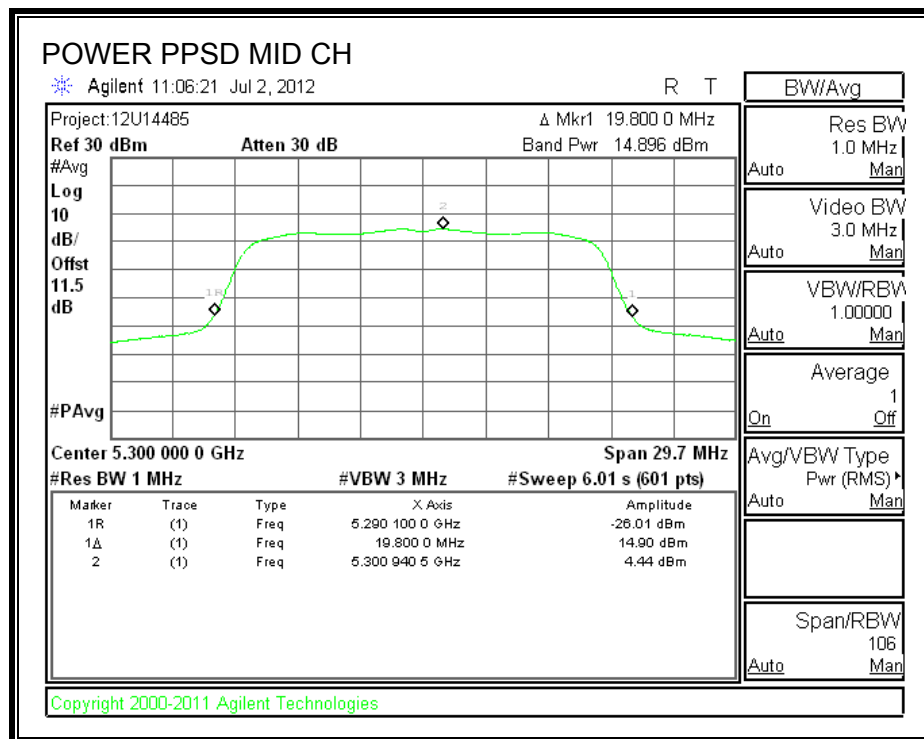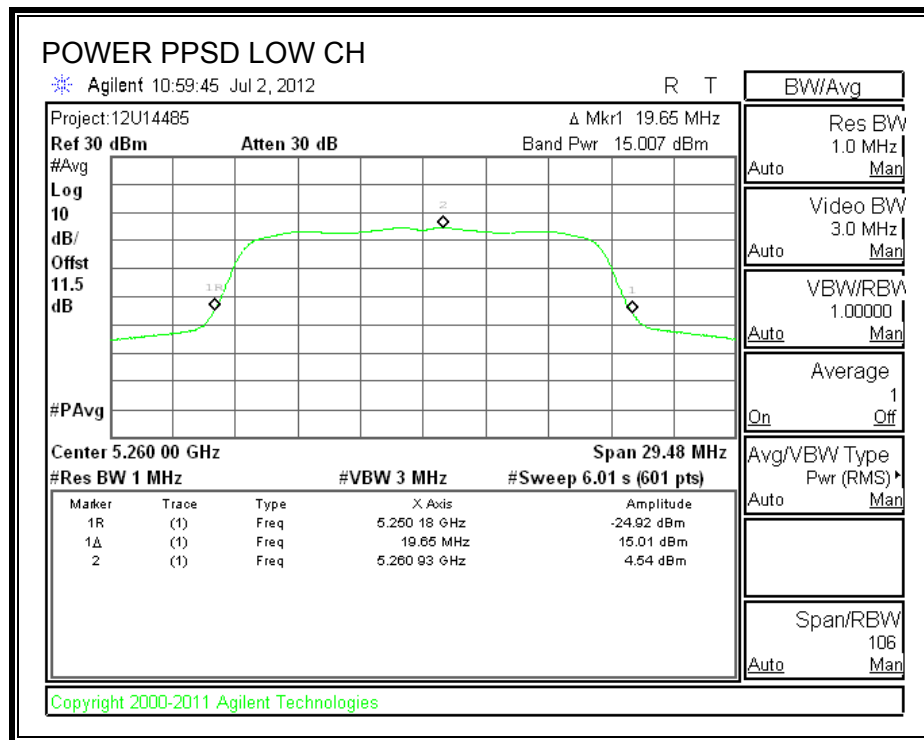

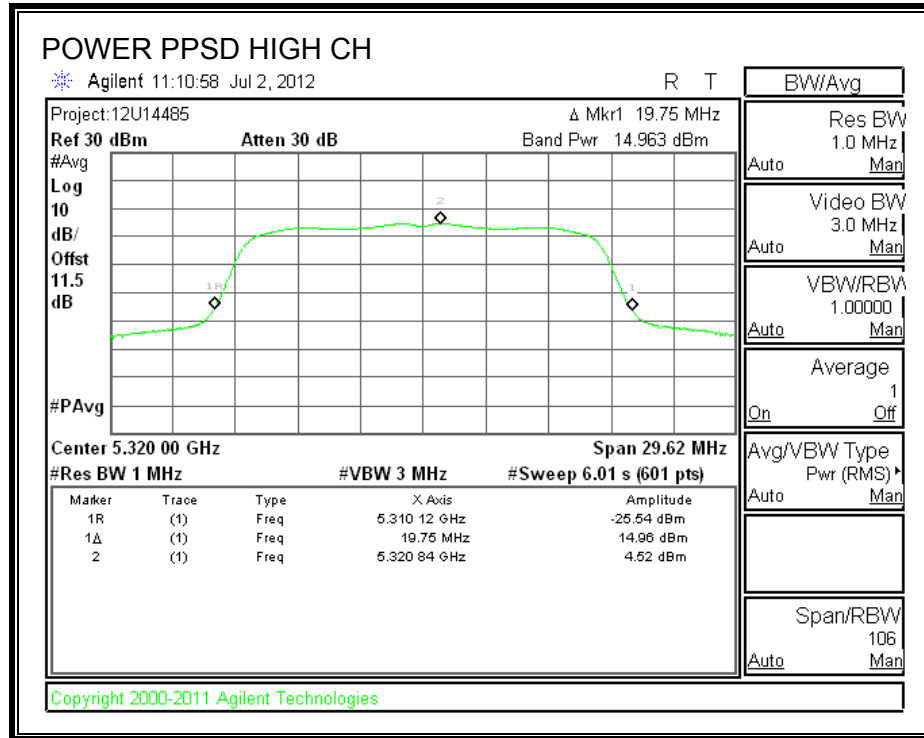

8.4.5. PEAK EXCURSION

LIMITS



FCC §15.407 (a) (6)


The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

RESULTS

Channel	Frequency (MHz)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Low	5260	10.63	13	-2.37
Mid	5300	9.79	13	-3.21
High	5320	9.34	13	-3.66

PEAK EXCURSION

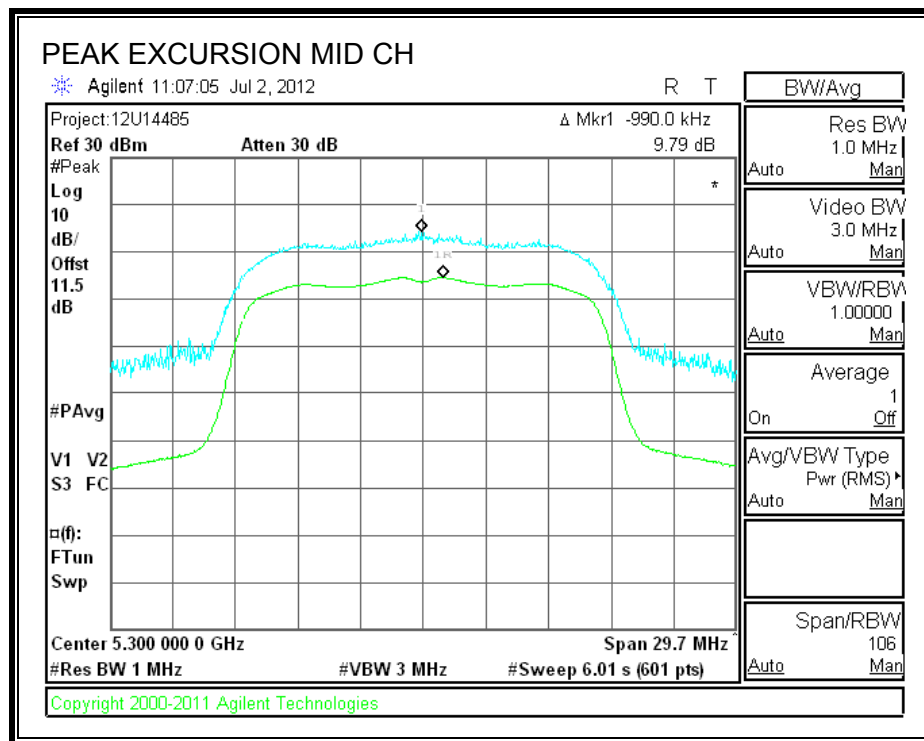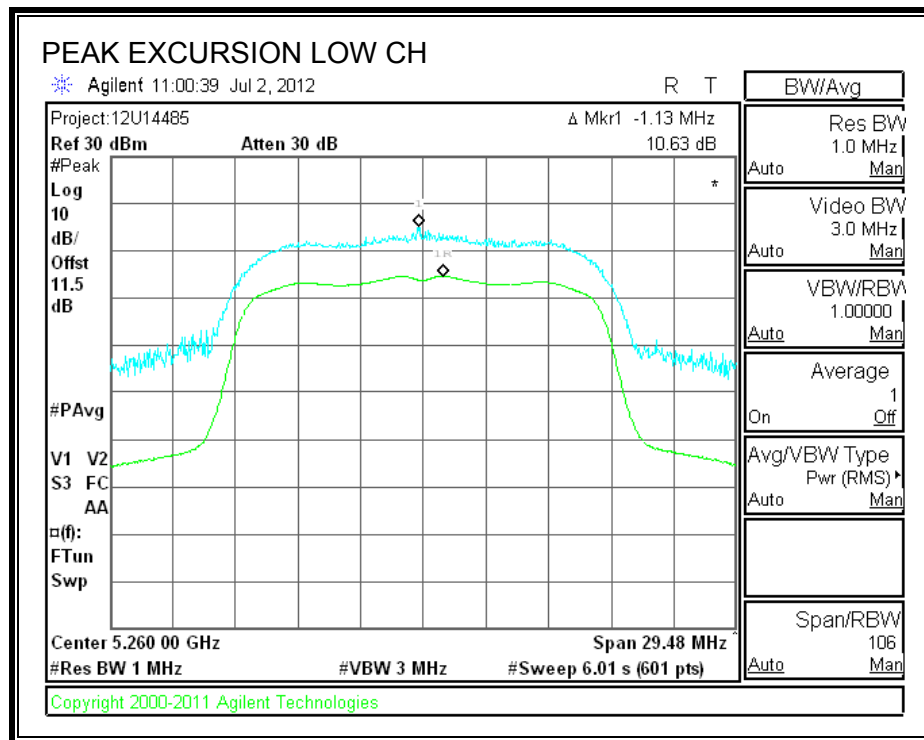

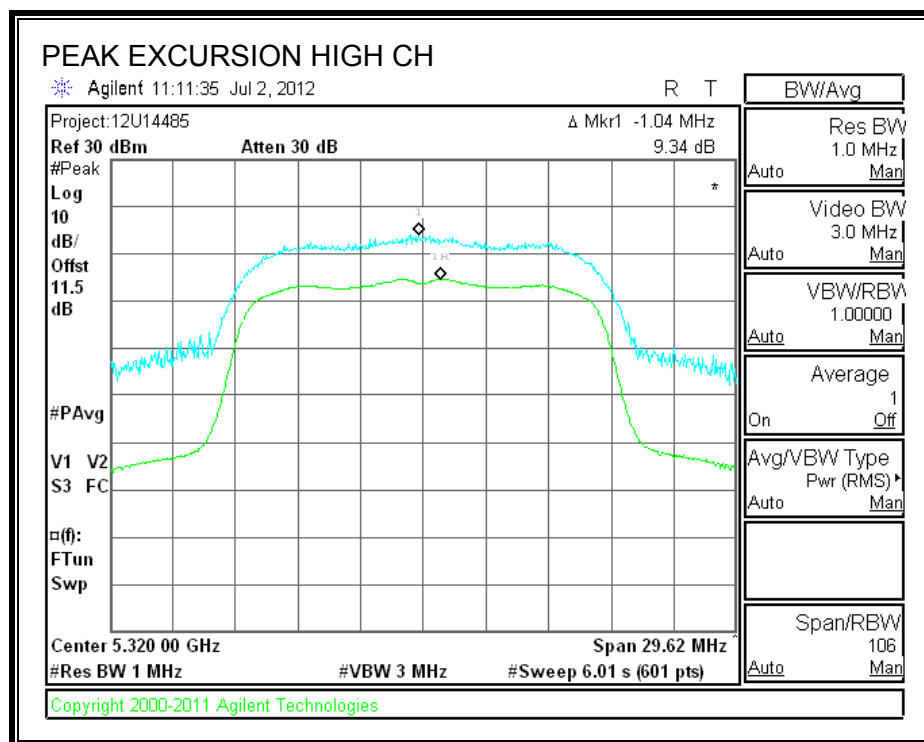

8.5. 802.11n HT20 MODE IN THE 5.3 GHz BAND

8.5.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5260	19.30
Mid	5300	19.30
High	5320	19.15

26 dB BANDWIDTH

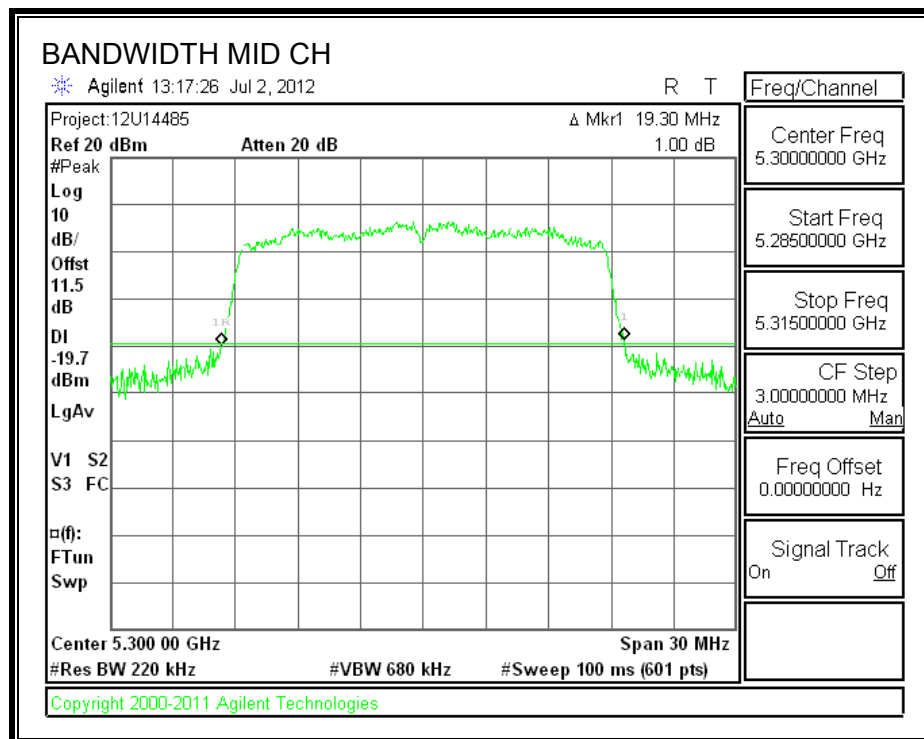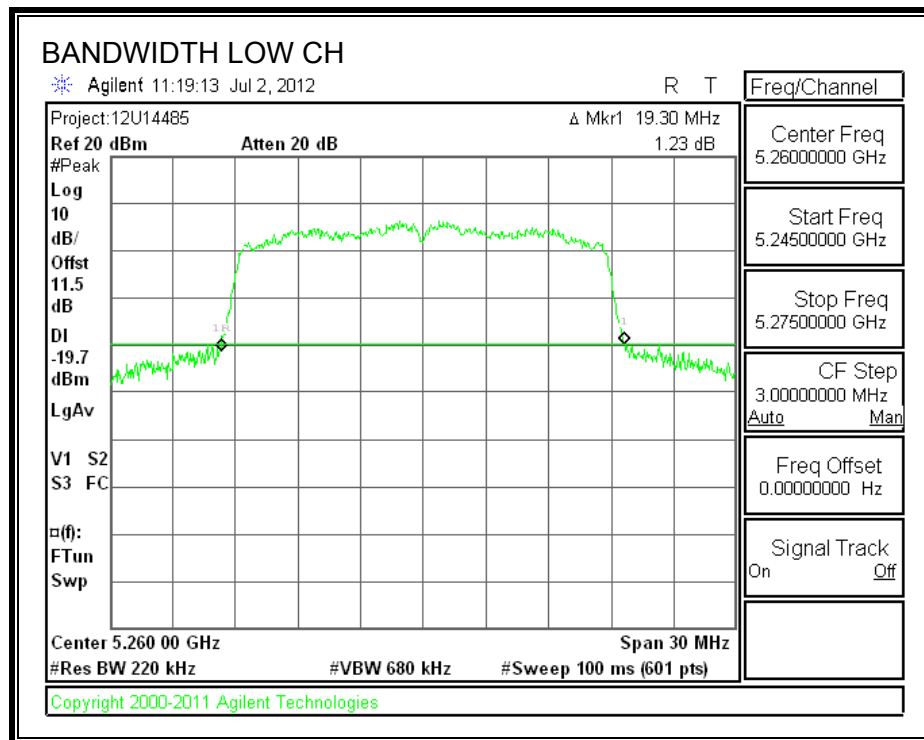

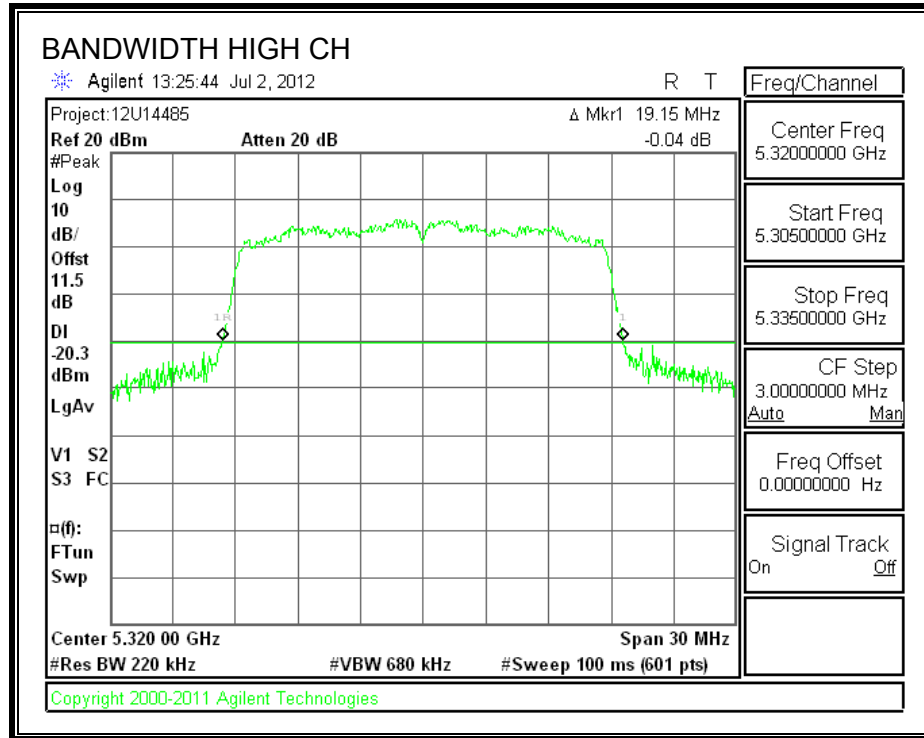

8.5.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5260	17.52
Mid	5300	17.53
High	5320	17.53

99% BANDWIDTH

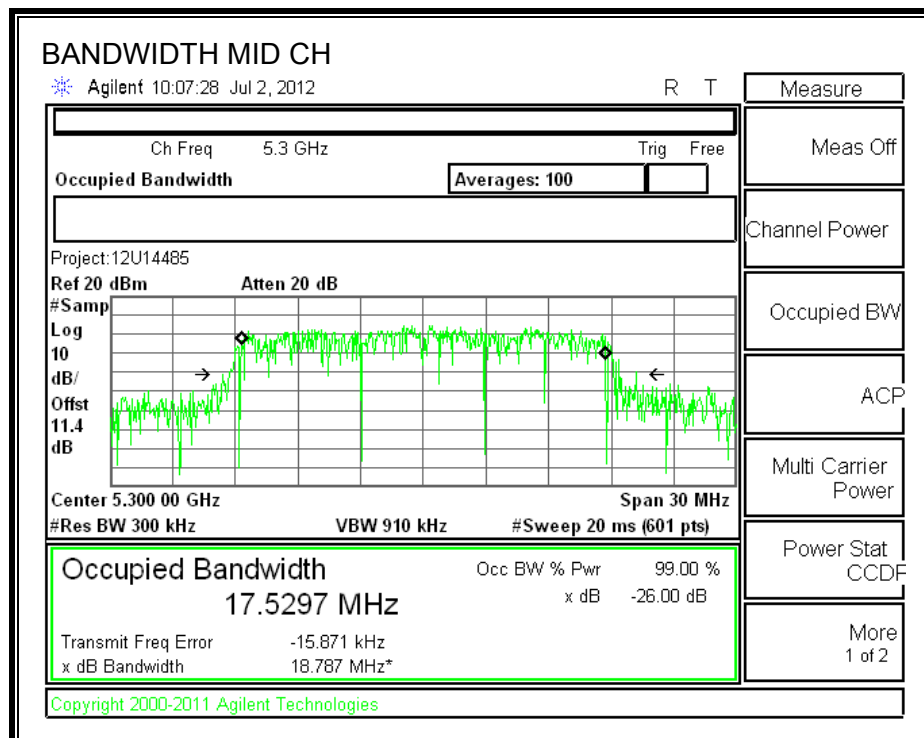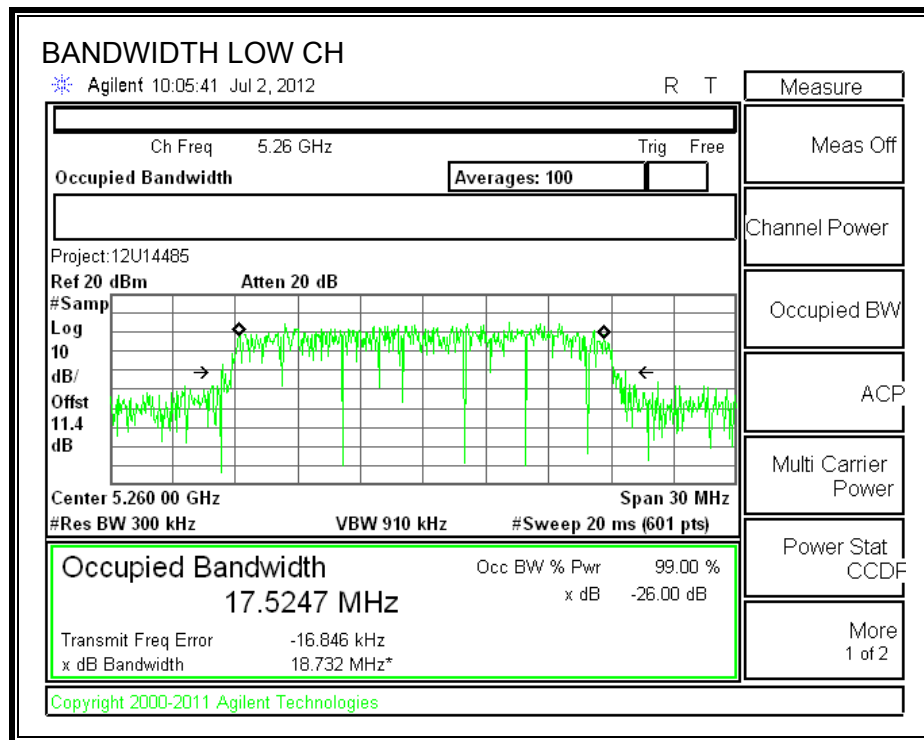

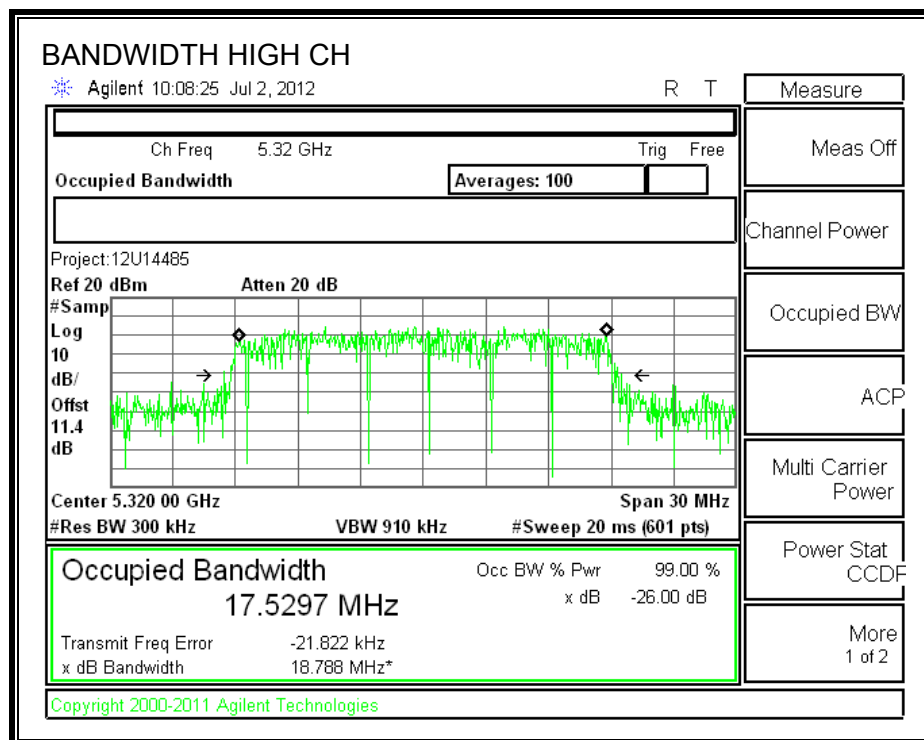

8.5.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11.4 dB (including 10 dB pad and 1.4 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5260	13.48
Mid	5300	13.50
High	5320	13.49

8.5.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (2)

IC RSS-210 A9.2 (2)

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 99% emission bandwidth for IC (26dB emission bandwidth for FCC) in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

99% bandwidth was used to calculate the power limit which was considered the worst case.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Limits

Channel	Frequency (MHz)	Fixed Limit (dBm)	B (MHz)	11 + 10 Log B Limit (dBm)	Directional Gain (dBi)	Power Limit (dBm)	PPSD Limit (dBm)
Low	5260	24	17.5	23.44	1.35	23.44	11.00
Mid	5300	24	17.5	23.44	1.35	23.44	11.00
High	5320	24	17.5	23.44	1.35	23.44	11.00

Duty Cycle CF (dB)	0.08	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



Output Power Results


Channel	Frequency (MHz)	Meas Power (dBm)	Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	15.10	15.18	23.44	-8.25
Mid	5300	14.65	14.73	23.44	-8.71
High	5320	14.80	14.88	23.44	-8.56

PPSD Results

Channel	Frequency (MHz)	Meas PPSD (dBm)	Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5260	4.46	4.54	11.00	-6.46
Mid	5300	4.00	4.08	11.00	-6.92
High	5320	4.15	4.23	11.00	-6.77

OUTPUT POWER AND PPSD

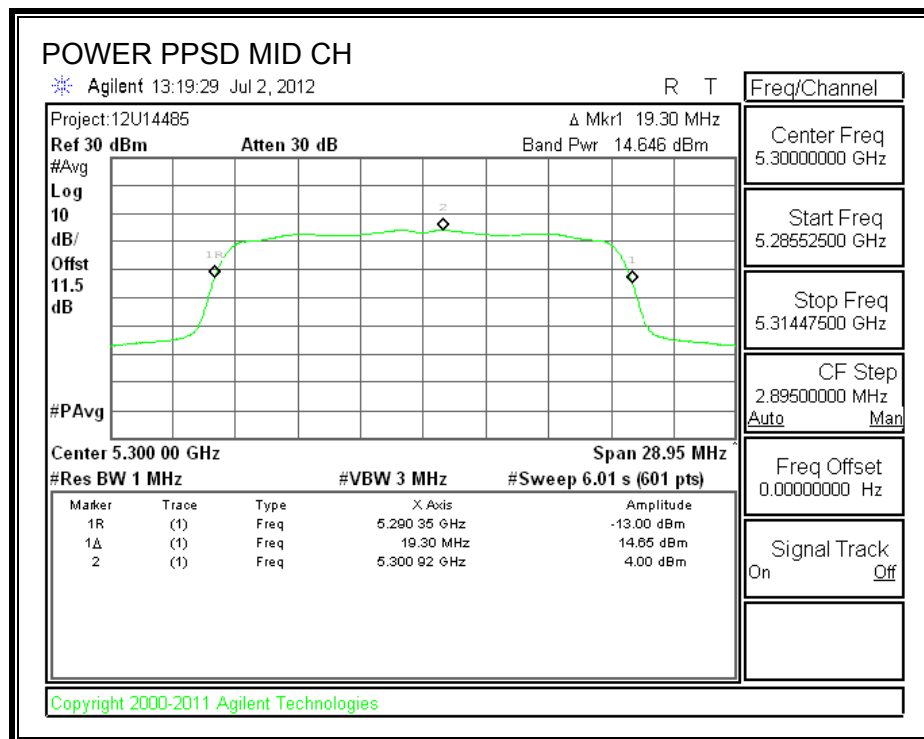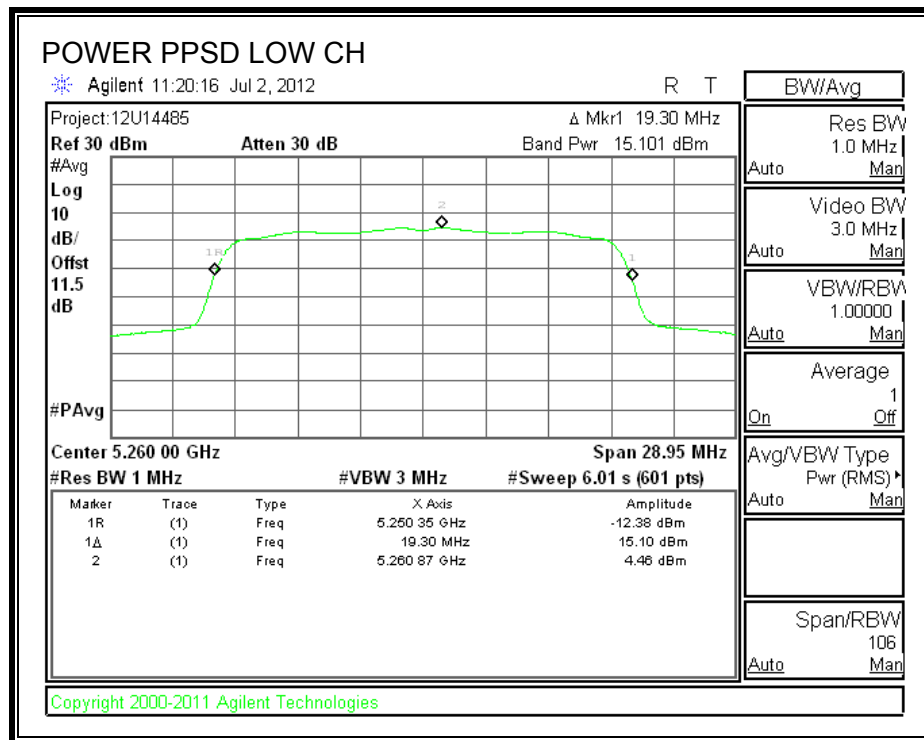

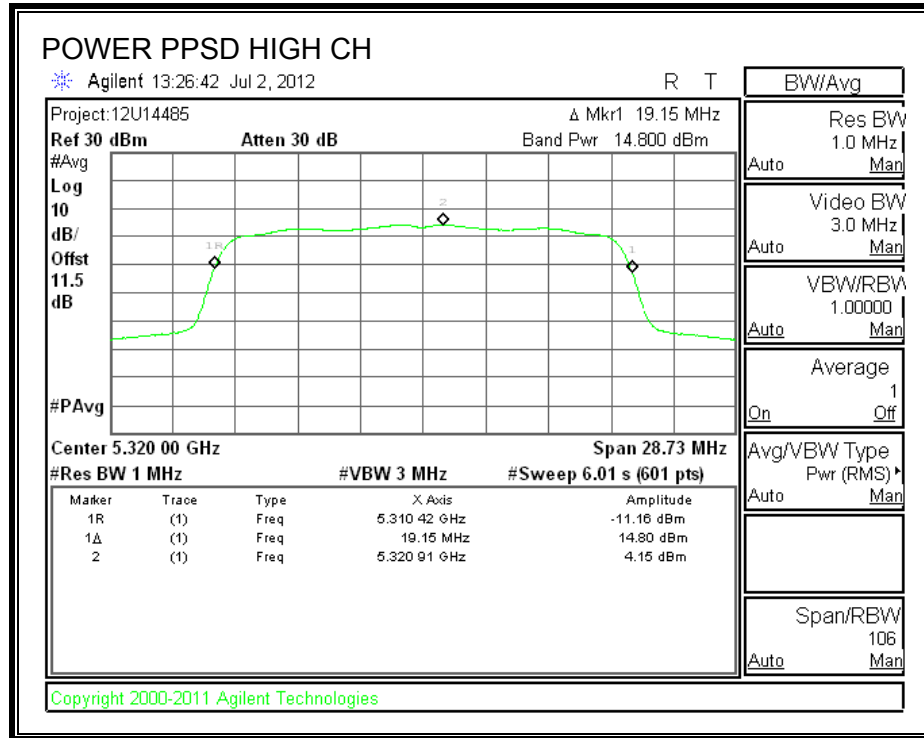

8.5.5. PEAK EXCURSION

LIMITS



FCC §15.407 (a) (6)


The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

RESULTS

Channel	Frequency (MHz)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Low	5260	8.80	13	-4.20
Mid	5300	9.34	13	-3.66
High	5320	9.11	13	-3.89

PEAK EXCURSION

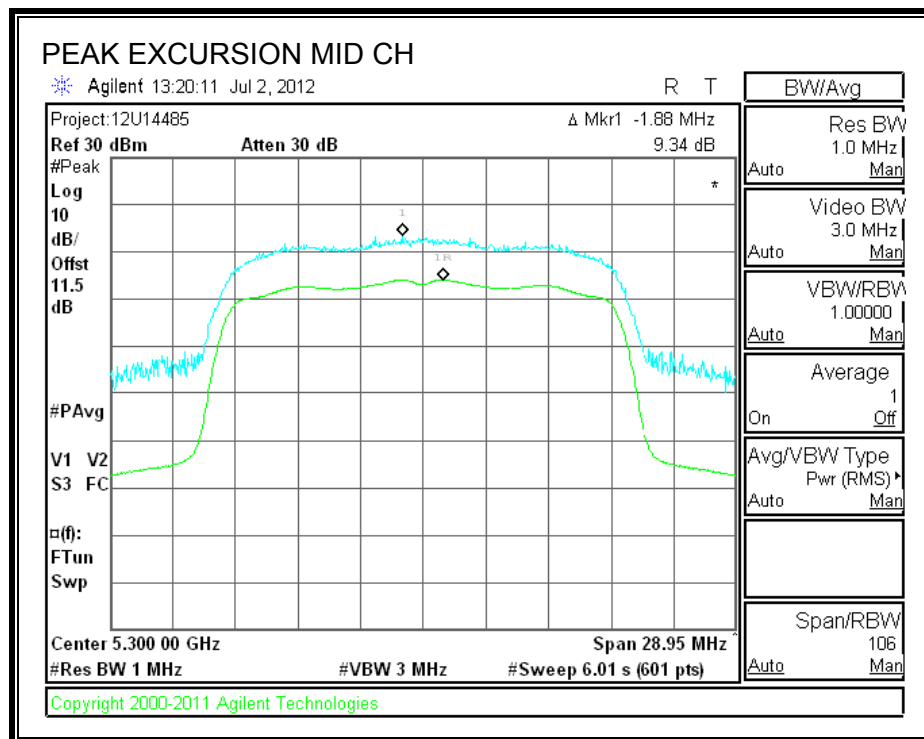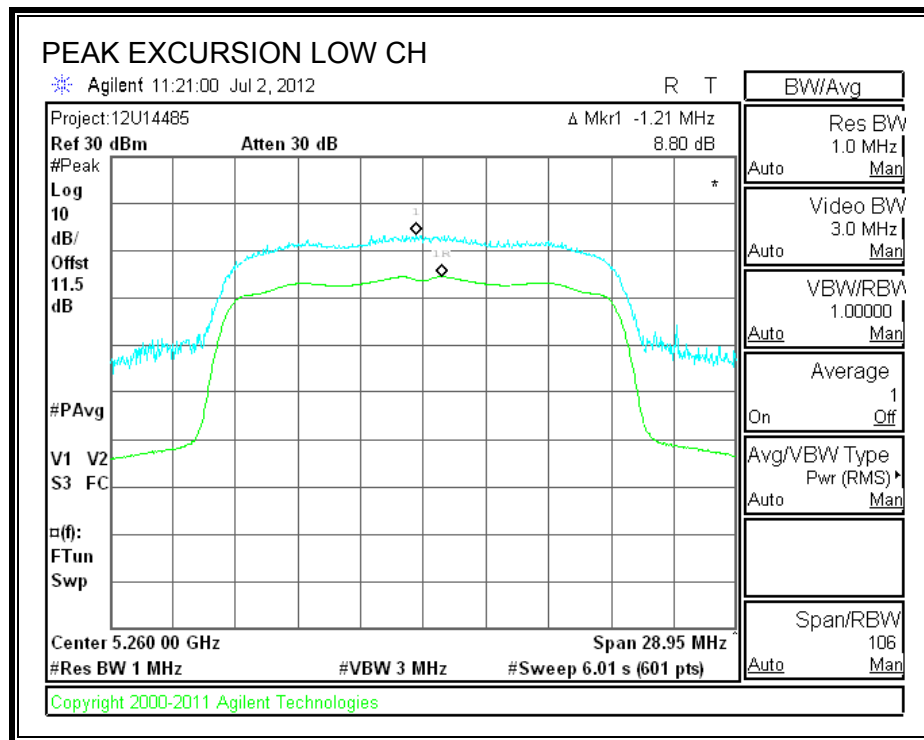

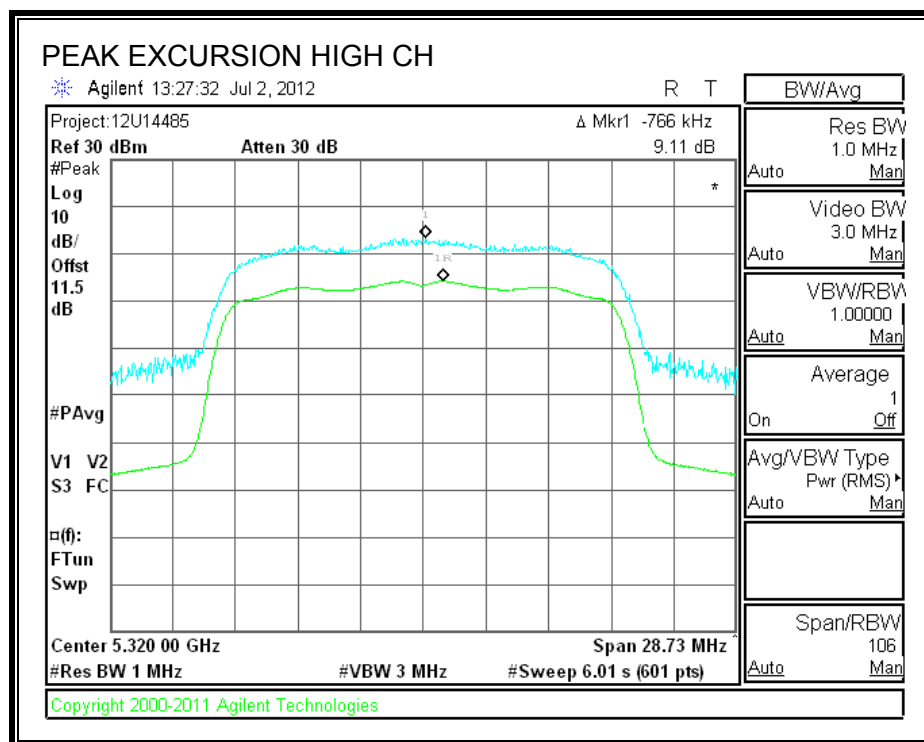

8.6. 802.11n HT40 MODE IN THE 5.3 GHz BAND

8.6.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5270	45.4
High	5310	45.2

26 dB BANDWIDTH

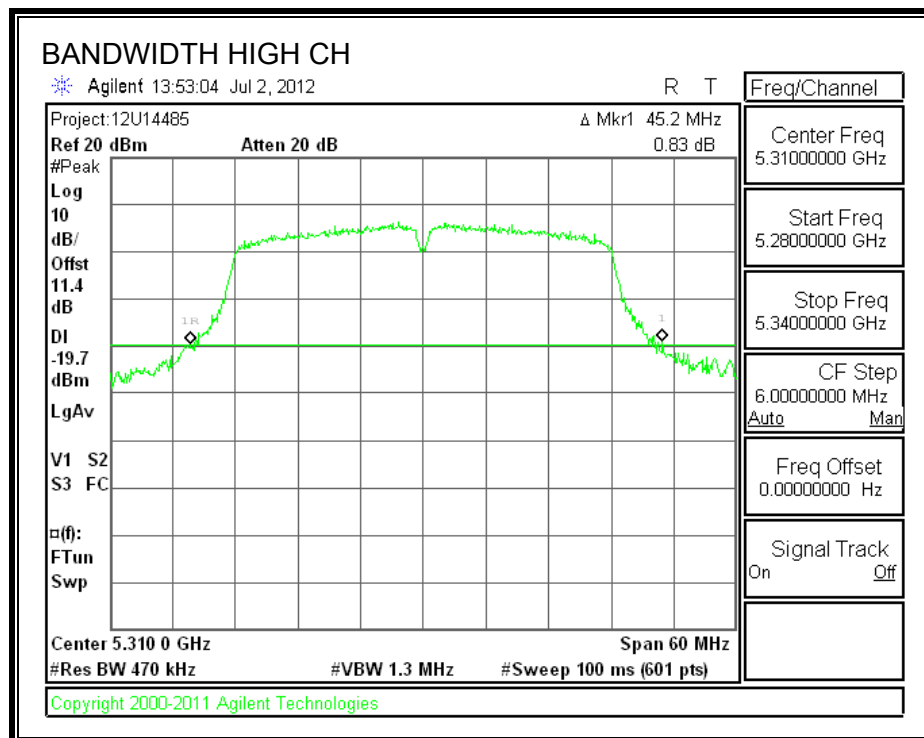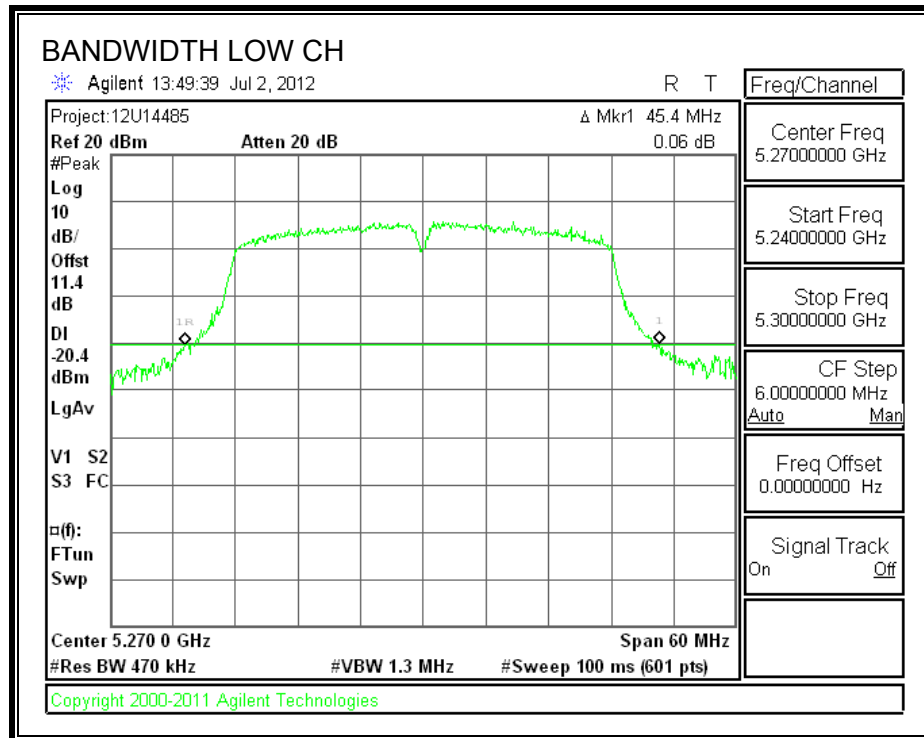

8.6.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5270	35.882
High	5310	35.891

99% BANDWIDTH

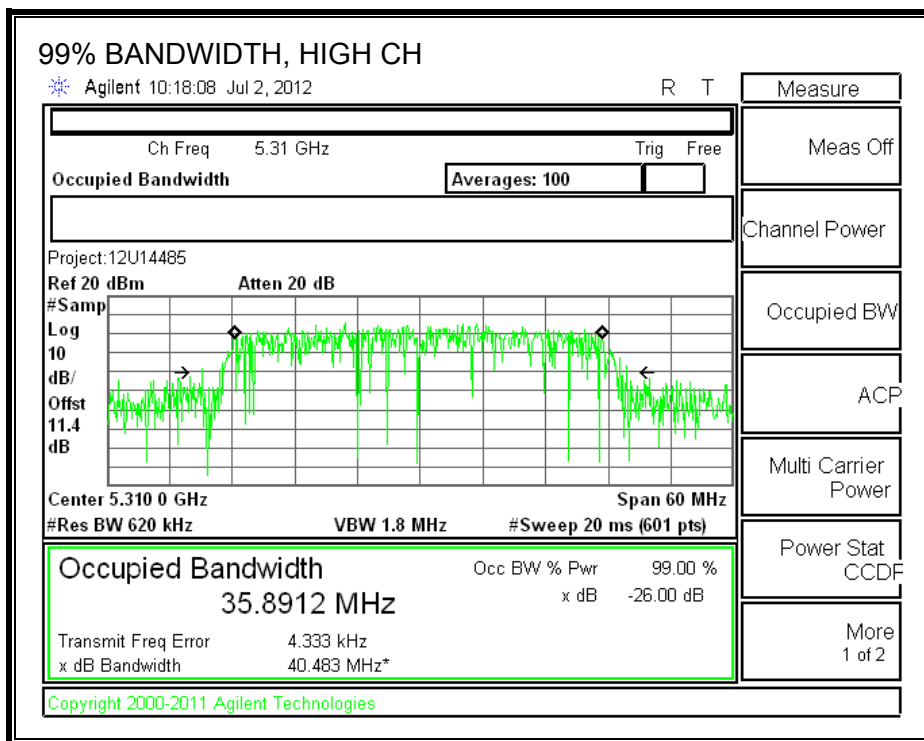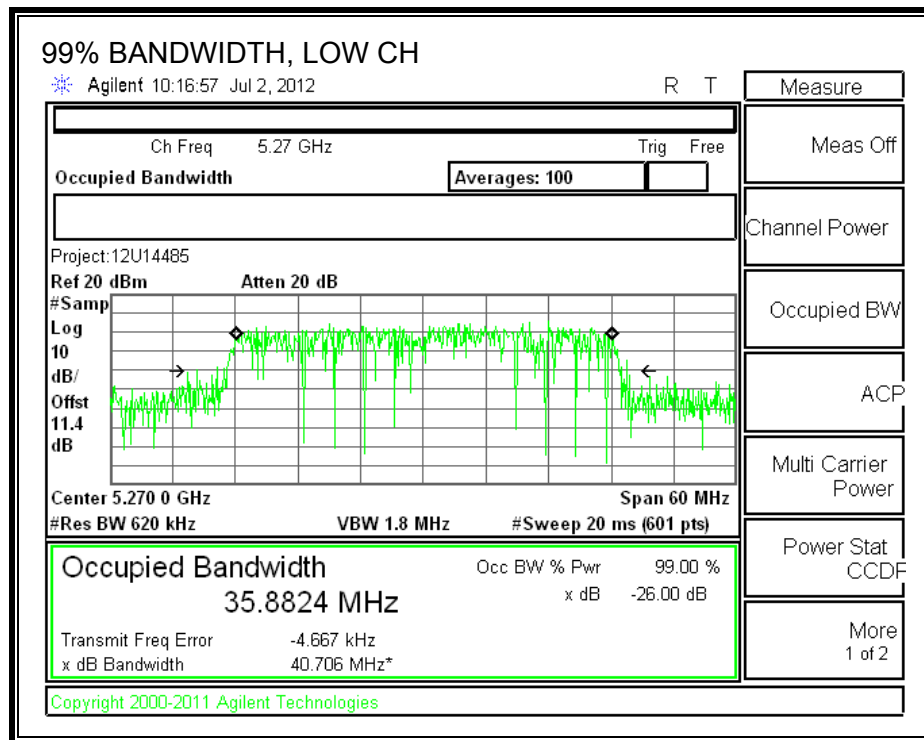

8.6.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11.4 dB (including 10 dB pad and 1.4 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5270	13.47
High	5310	13.45

8.6.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (2)

IC RSS-210 A9.2 (2)

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 99% emission bandwidth for IC (26dB emission bandwidth for FCC) in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

99% bandwidth was used to calculate the power limit which was considered the worst case.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Limits

Channel	Frequency (MHz)	Fixed Limit (dBm)	B (MHz)	11 + 10 Log B Limit (dBm)	Directional Gain (dBi)	Power Limit (dBm)	PPSD Limit (dBm)
Low	5270	24	35.9	26.55	1.35	24.00	11.00
High	5310	24	35.9	26.55	1.35	24.00	11.00

Duty Cycle CF (dB)	0.08	Included in Calculations of Corr'd Power & PPSP
--------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	14.81	14.89	24.00	-9.11
High	5310	14.81	14.89	24.00	-9.11

PPSD Results

Channel	Frequency (MHz)	Meas PPSD (dBm)	Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5270	0.75	0.83	11.00	-10.17
High	5310	0.77	0.85	11.00	-10.15

OUTPUT POWER AND PPSD

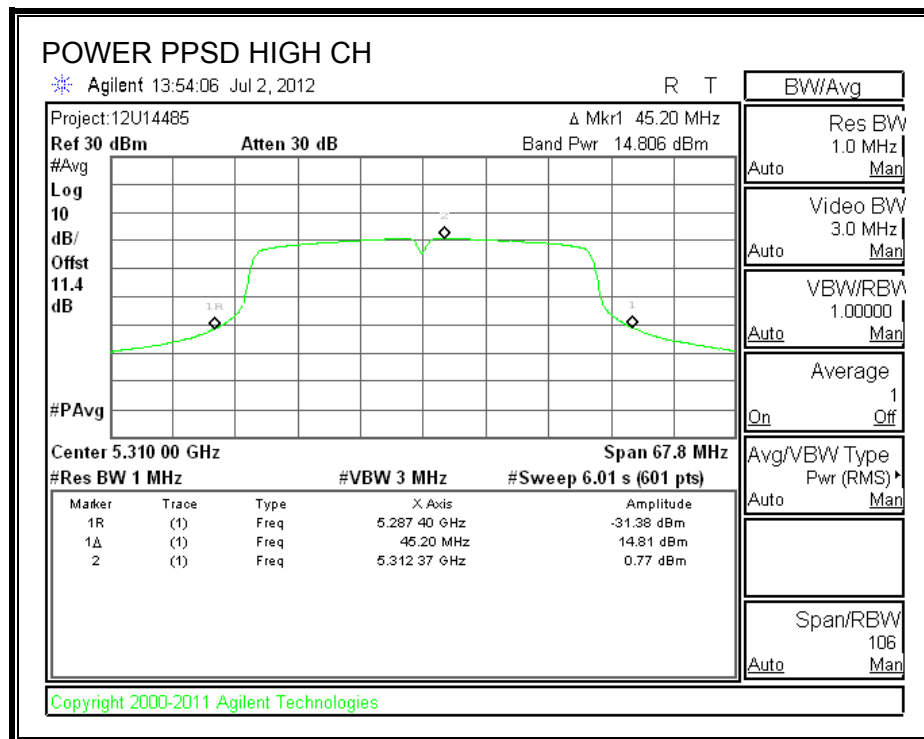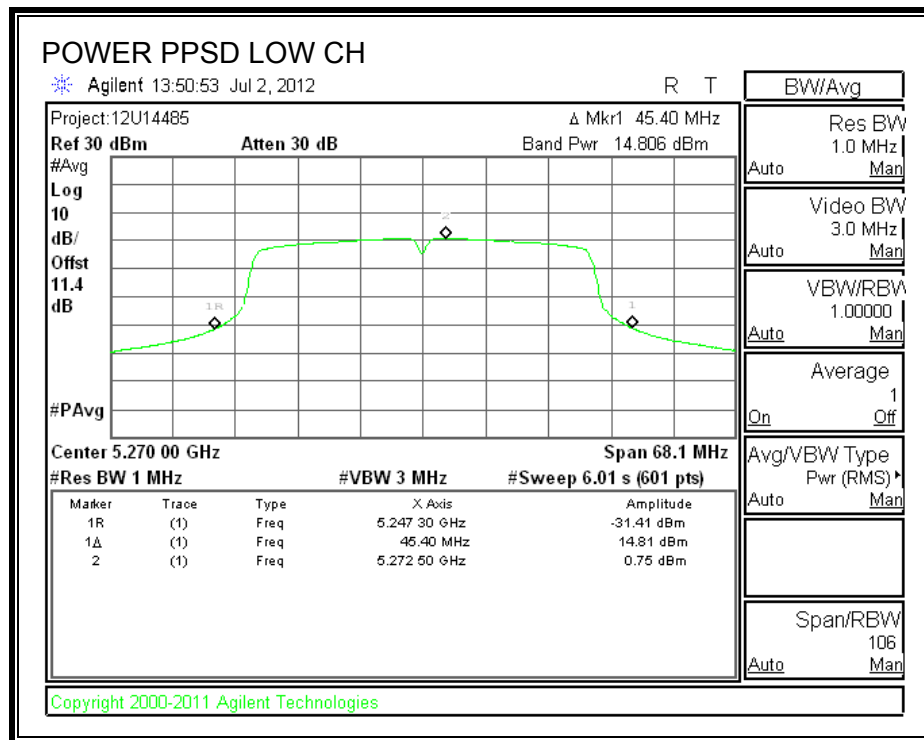

8.6.5. PEAK EXCURSION

LIMITS



FCC §15.407 (a) (6)

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

RESULTS

Channel	Frequency (MHz)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Low	5270	9.48	13	-3.52
High	5310	9.35	13	-3.65

PEAK EXCURSION

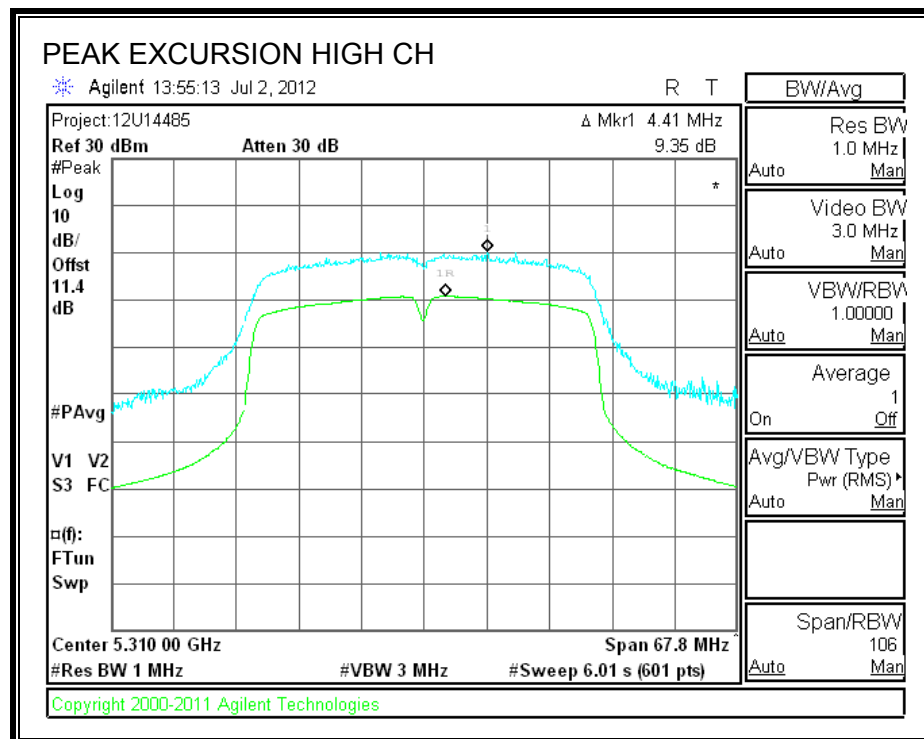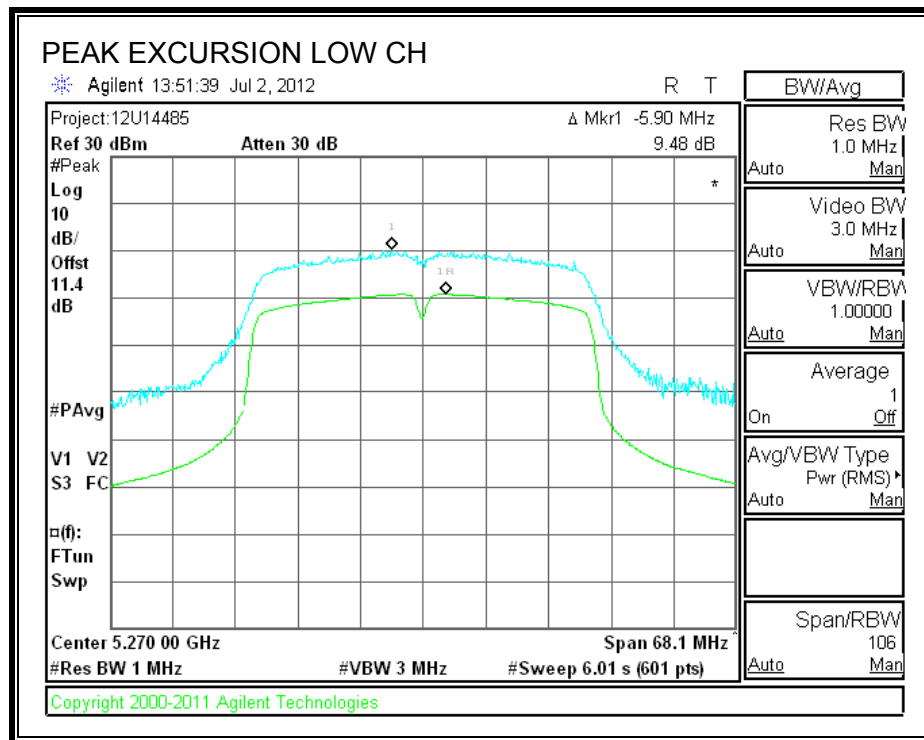

8.7. 802.11a MODE IN THE 5.6 GHz BAND

8.7.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5500	18.85
Mid	5580	18.85
High	5700	18.80

26 dB BANDWIDTH

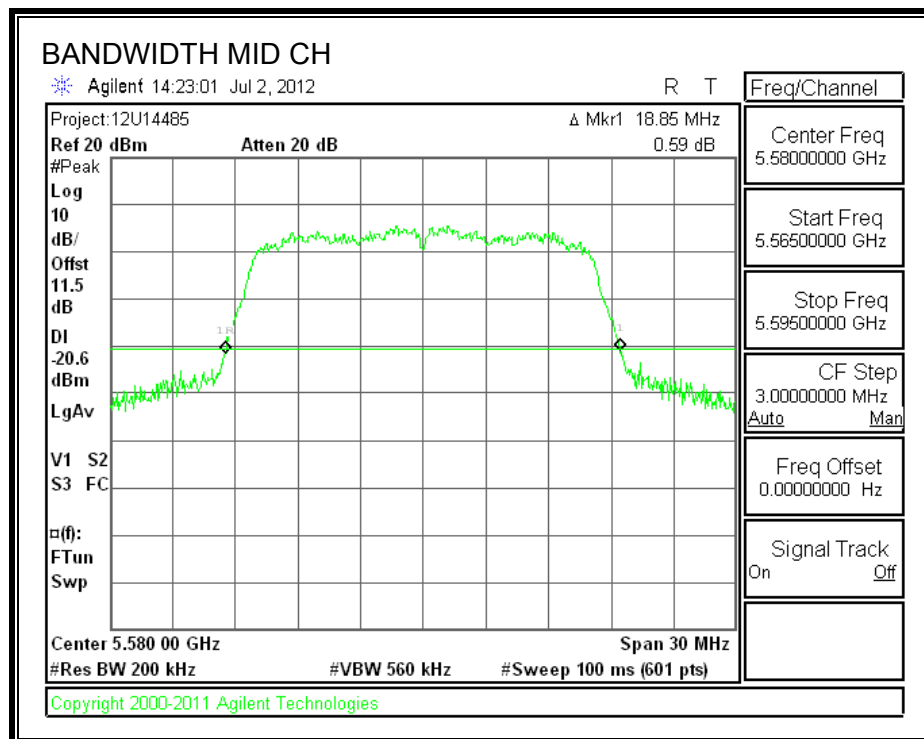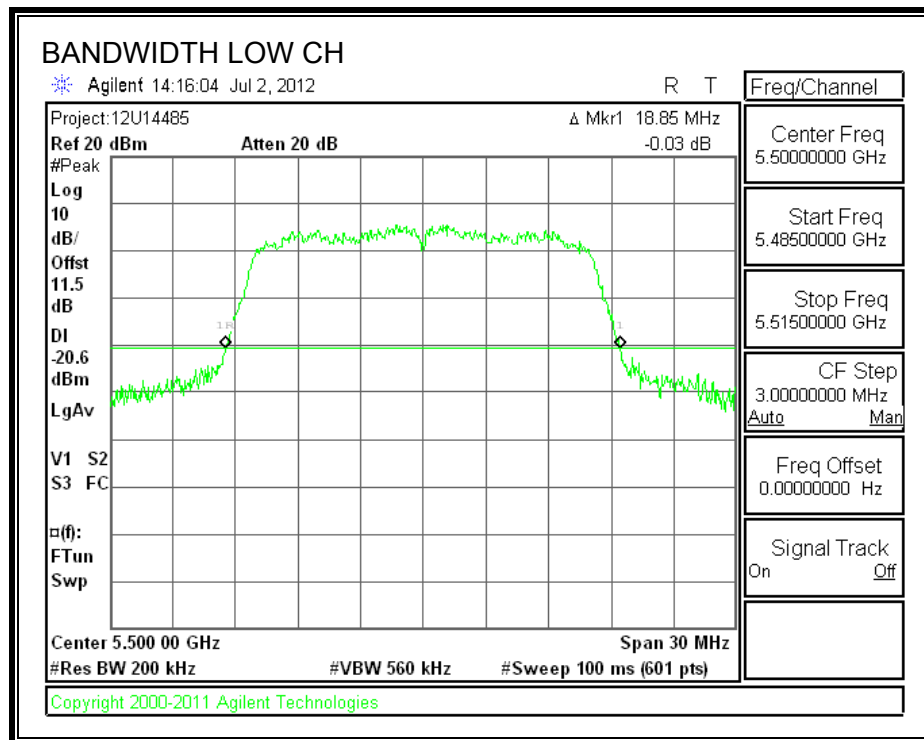

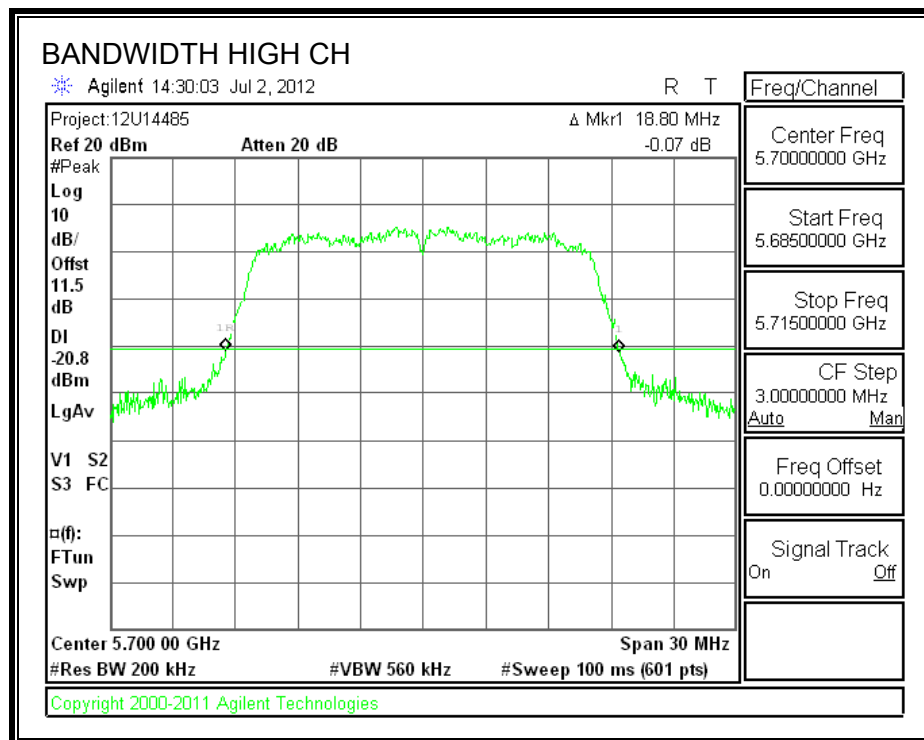

8.7.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5500	16.349
Mid	5580	16.338
High	5700	16.342

99% BANDWIDTH

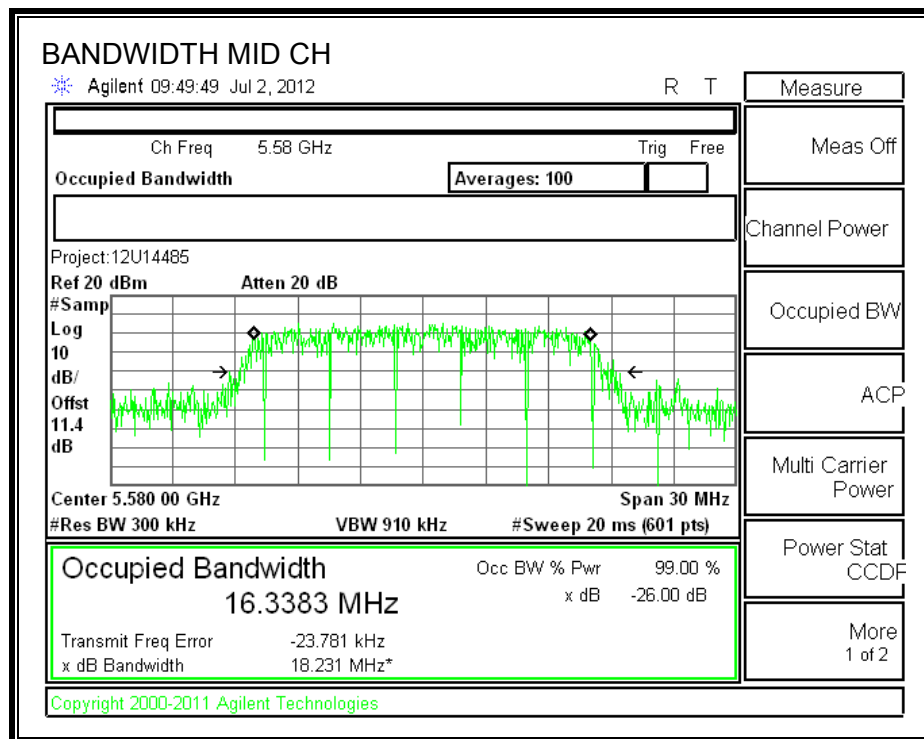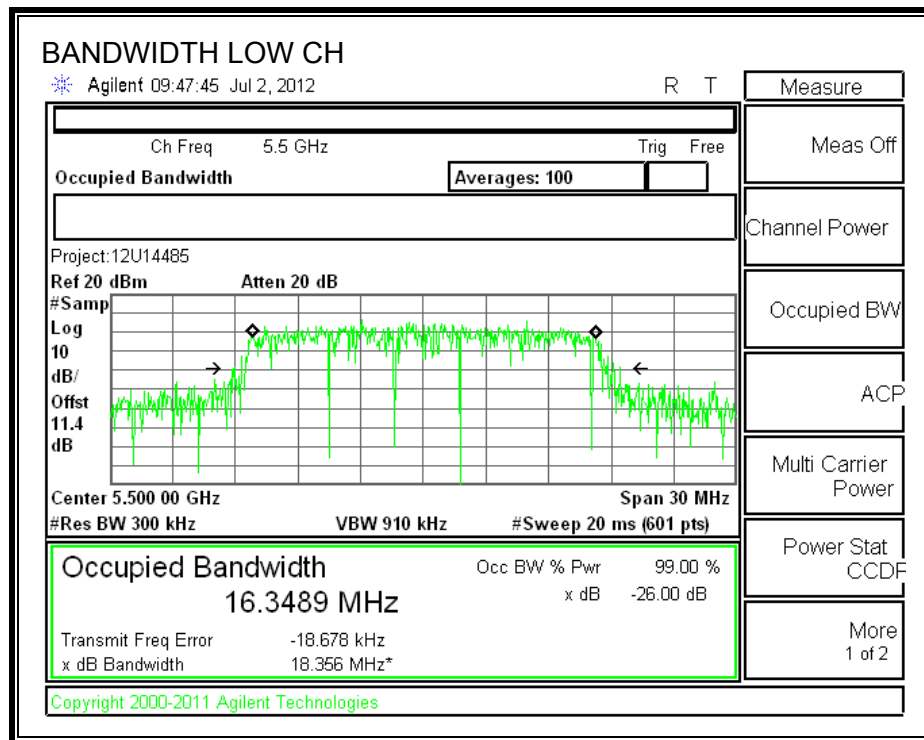

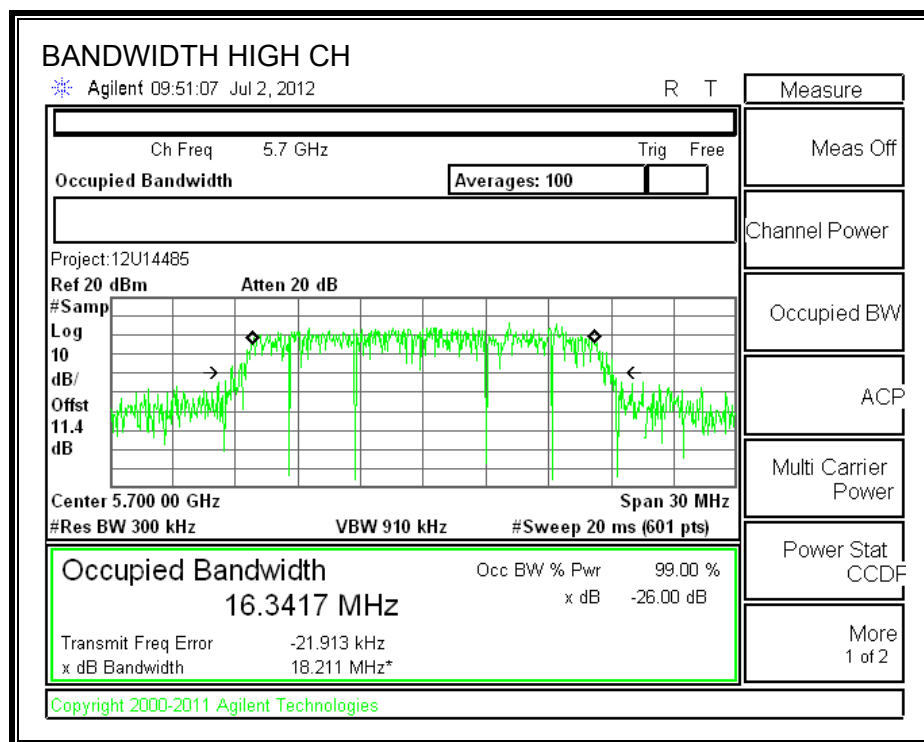

8.7.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11.4 dB (including 10 dB pad and 1.4 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5500	12.96
Mid	5580	12.95
High	5700	12.97

8.7.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (2)

IC RSS-210 A9.2 (3)

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 99% emission bandwidth for IC (26dB emission bandwidth for FCC) in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

99% bandwidth was used to calculate the power limit which was considered the worst case.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Limits

Channel	Frequency (MHz)	Fixed Limit (dBm)	B (MHz)	11 + 10 Log B Limit (dBm)	Directional Gain (dBi)	Power Limit (dBm)	PPSD Limit (dBm)
Low	5500	24	16.3	23.13	3.08	23.13	11.00
Mid	5580	24	16.3	23.13	3.08	23.13	11.00
High	5700	24	16.3	23.13	3.08	23.13	11.00

Duty Cycle CF (dB)	0.08	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



Output Power Results


Channel	Frequency (MHz)	Meas Power (dBm)	Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	14.66	14.74	23.13	-8.39
Mid	5580	14.62	14.70	23.13	-8.43
High	5700	14.45	14.53	23.13	-8.60

PPSD Results

Channel	Frequency (MHz)	Meas PPSD (dBm)	Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5500	4.30	4.38	11.00	-6.62
Mid	5580	4.14	4.22	11.00	-6.78
High	5700	3.98	4.06	11.00	-6.94

OUTPUT POWER AND PPSD

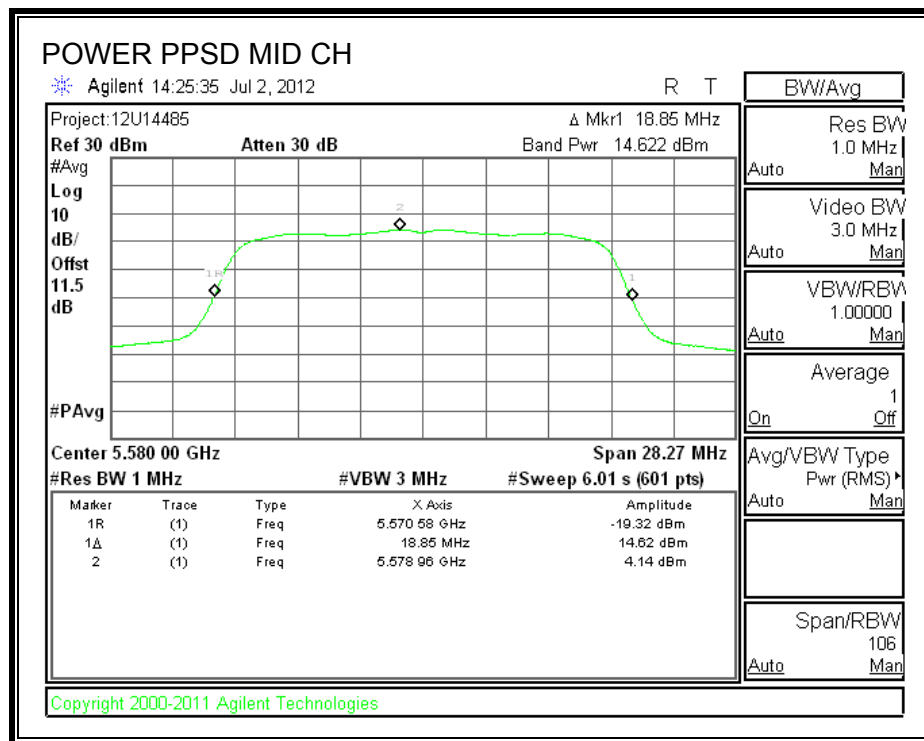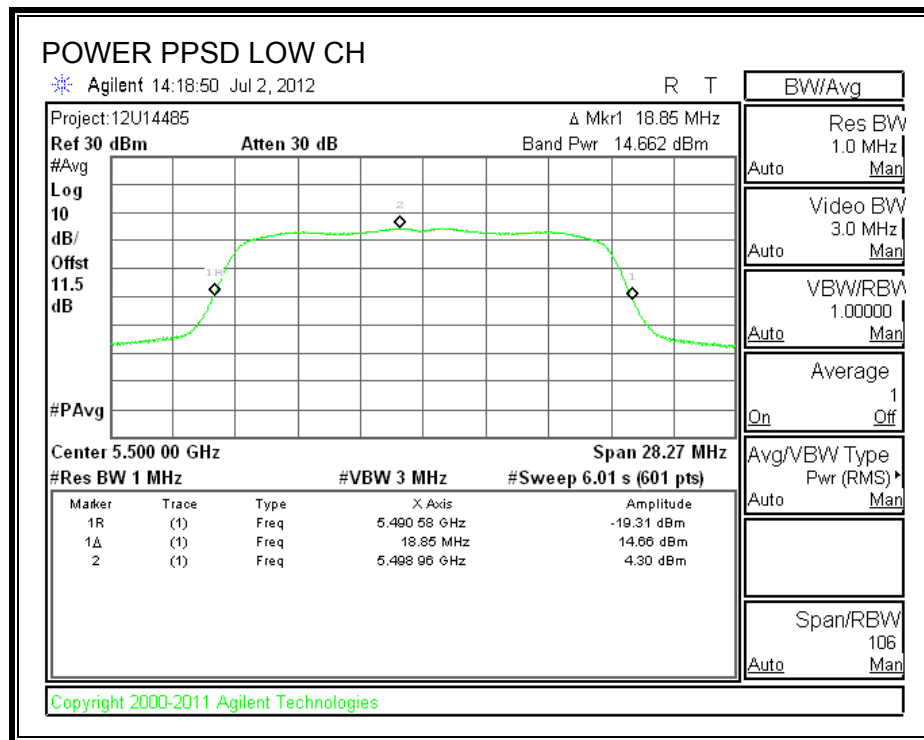

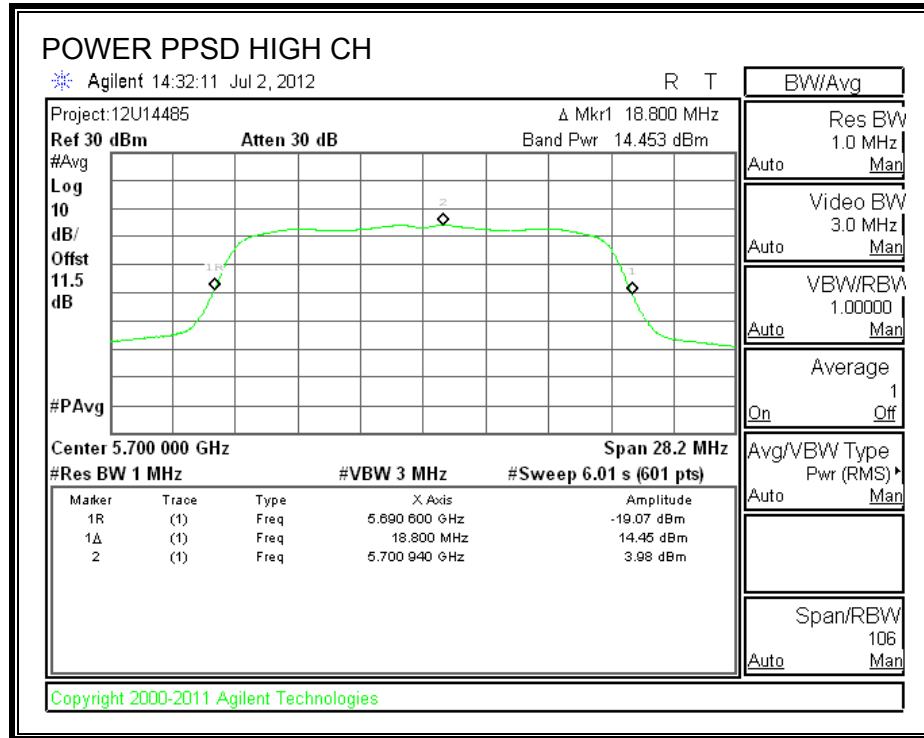

8.7.5. PEAK EXCURSION

LIMITS



FCC §15.407 (a) (6)


The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

RESULTS

Channel	Frequency (MHz)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Low	5500	9.81	13	-3.19
Mid	5580	9.66	13	-3.34
High	5700	10.12	13	-2.88

PEAK EXCURSION

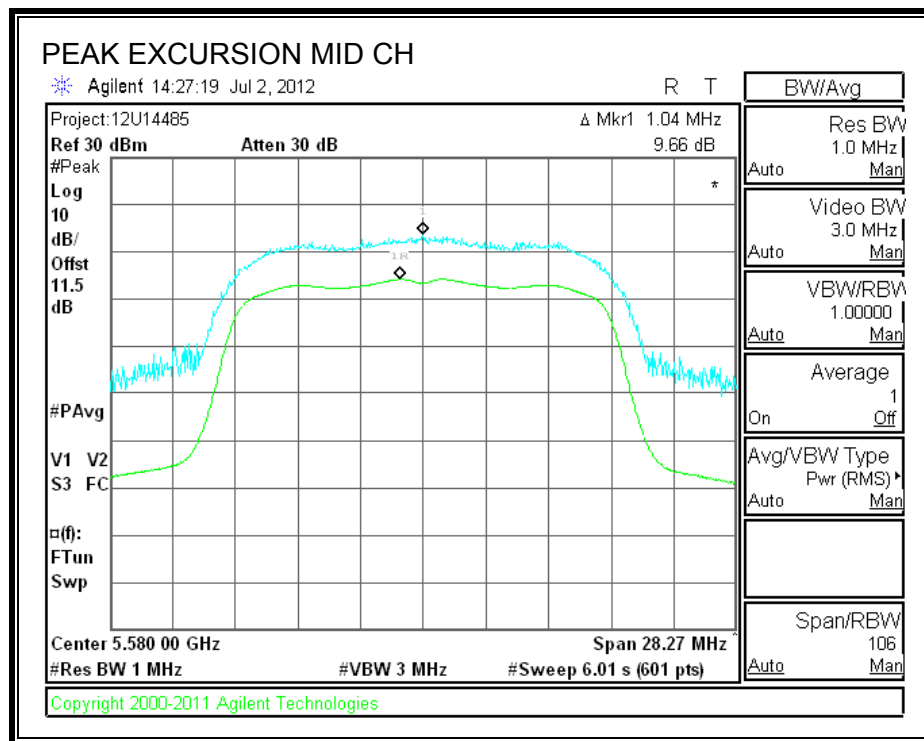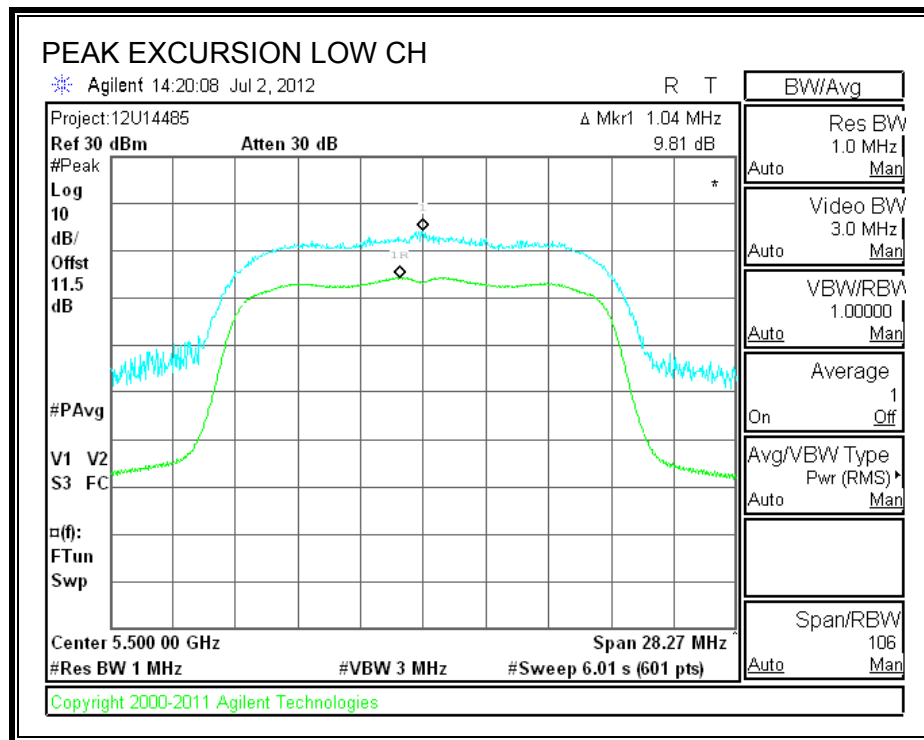

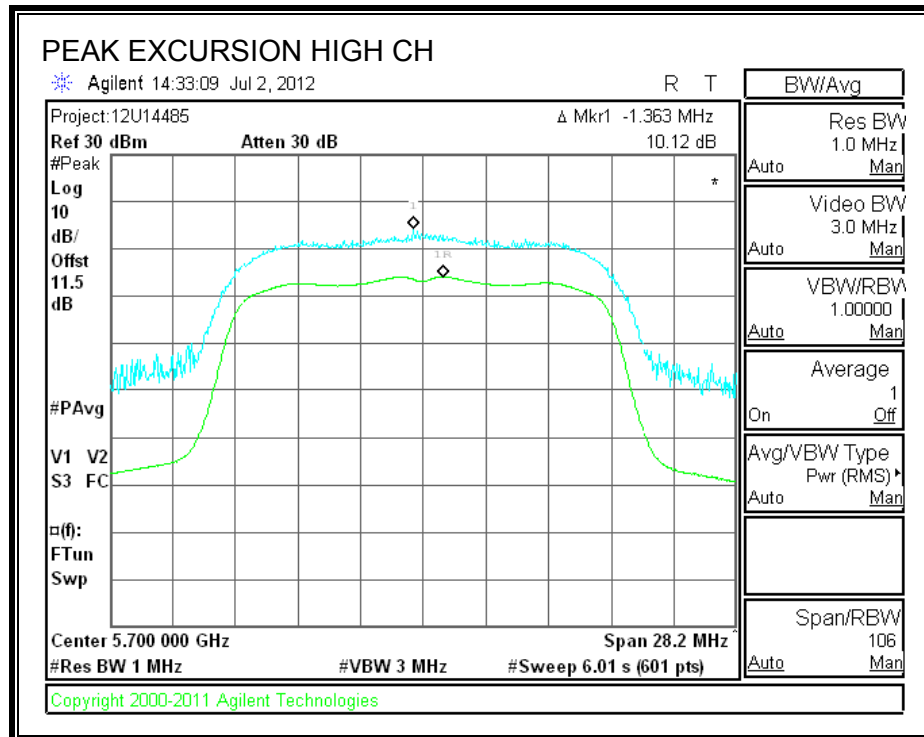

8.8. 802.11n HT20 MODE IN THE 5.6 GHz BAND

8.8.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5500	19.15
Mid	5580	19.15
High	5700	19.20

26 dB BANDWIDTH

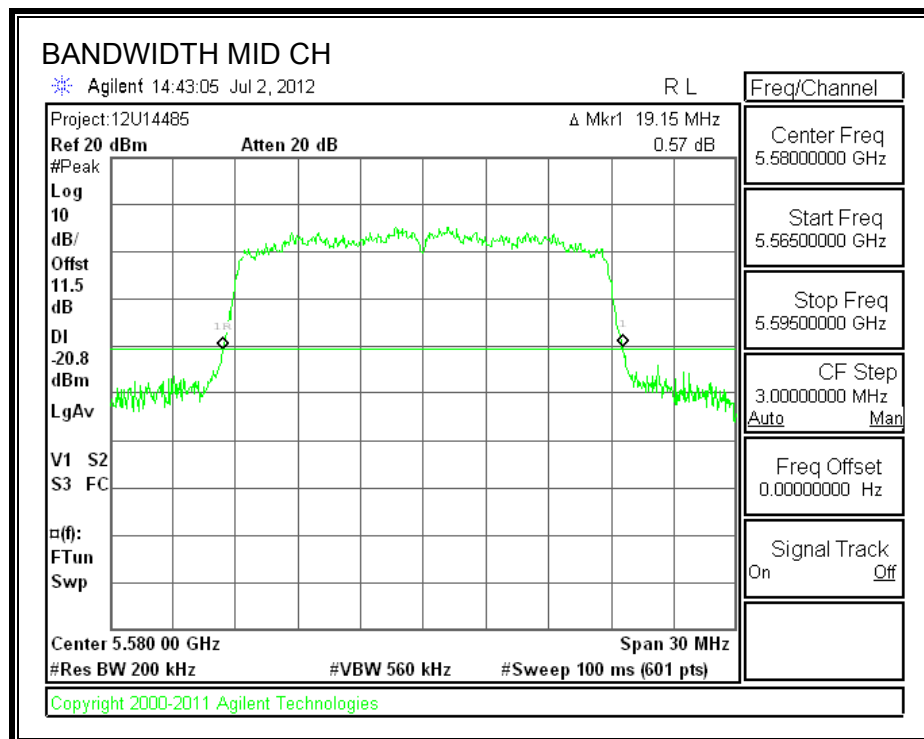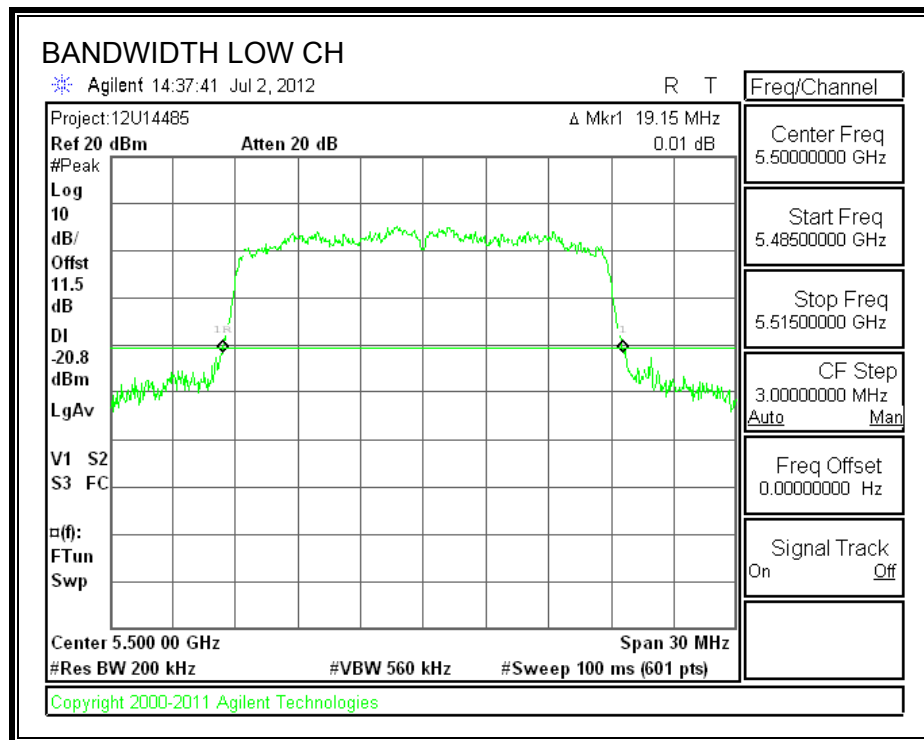

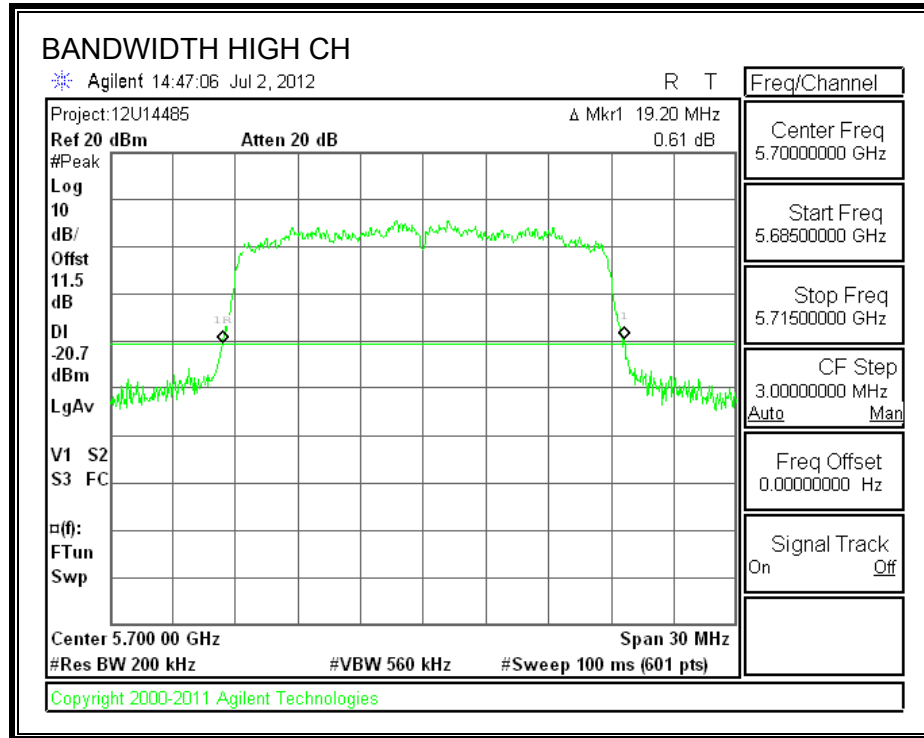

8.8.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5500	17.525
Mid	5580	17.532
High	5700	17.533

99% BANDWIDTH

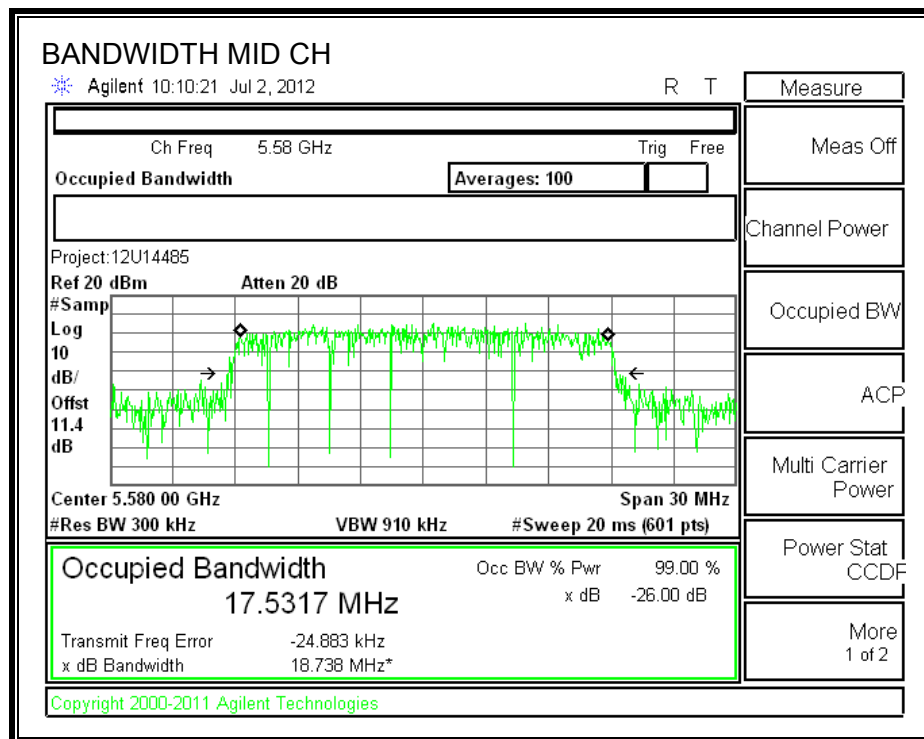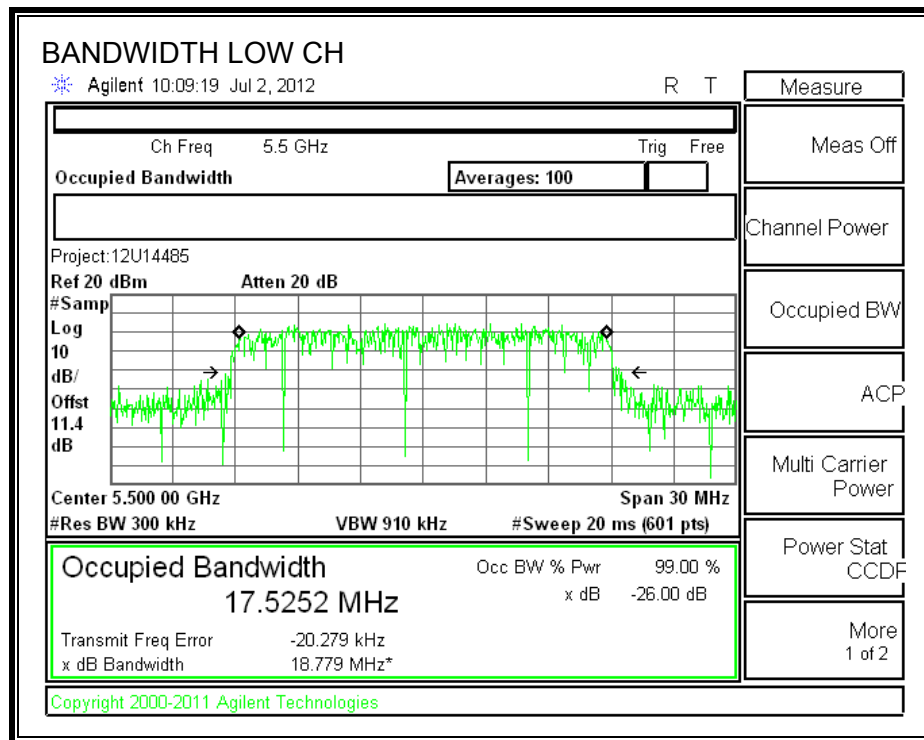

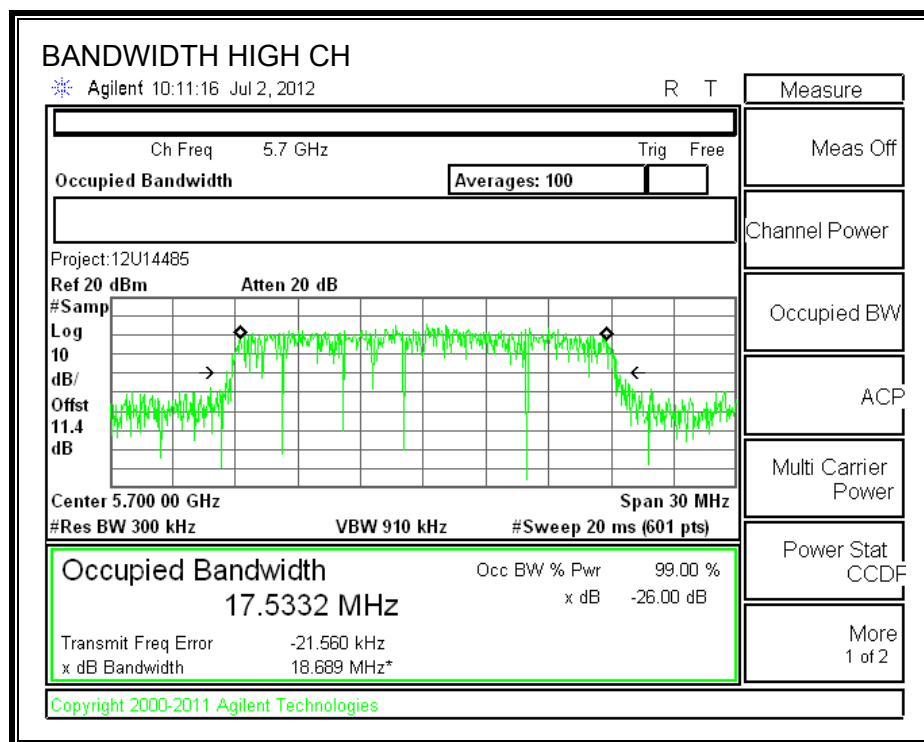

8.8.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11.4 dB (including 10 dB pad and 1.4 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5500	12.95
Mid	5580	12.97
High	5700	12.95

8.8.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (2)

IC RSS-210 A9.2 (3)

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 99% emission bandwidth for IC (26dB emission bandwidth for FCC) in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

99% bandwidth was used to calculate the power limit which was considered the worst case.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Limits

Channel	Frequency (MHz)	Fixed Limit (dBm)	B (MHz)	11 + 10 Log B Limit (dBm)	Directional Gain (dBi)	Power Limit (dBm)	PPSD Limit (dBm)
Low	5500	24	17.5	23.44	3.08	23.44	11.00
Mid	5580	24	17.5	23.44	3.08	23.44	11.00
High	5700	24	17.5	23.44	3.08	23.44	11.00

Duty Cycle CF (dB)	0.08	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



Output Power Results


Channel	Frequency (MHz)	Meas Power (dBm)	Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	14.51	14.59	23.44	-8.85
Mid	5580	14.50	14.58	23.44	-8.86
High	5700	14.34	14.42	23.44	-9.01

PPSD Results

Channel	Frequency (MHz)	Meas PPSD (dBm)	Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5500	3.86	3.94	11.00	-7.06
Mid	5580	3.83	3.91	11.00	-7.09
High	5700	3.68	3.76	11.00	-7.24

OUTPUT POWER AND PPSD

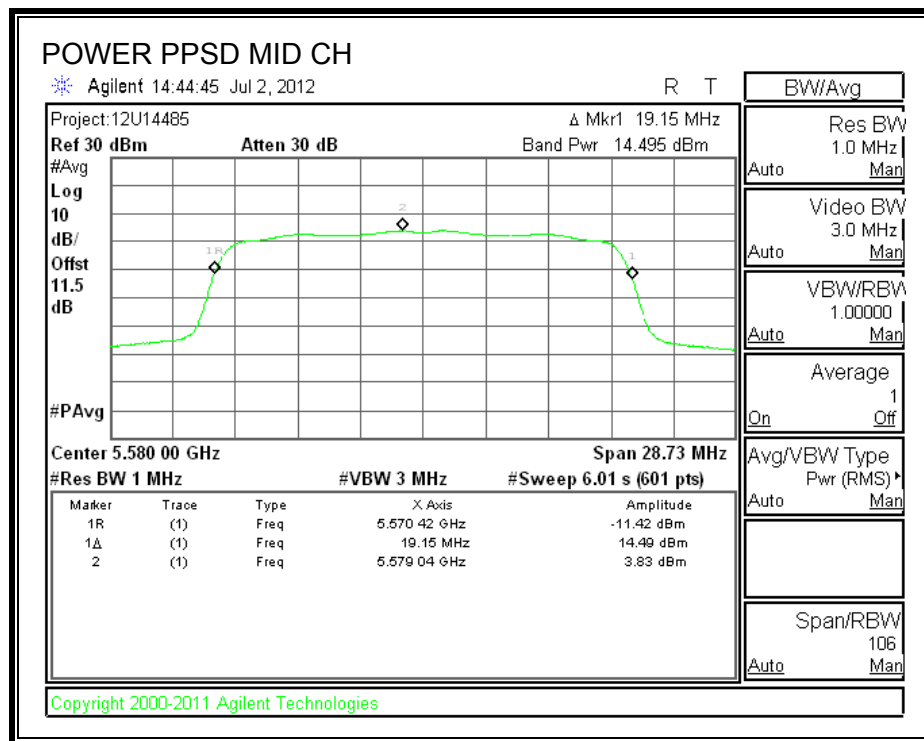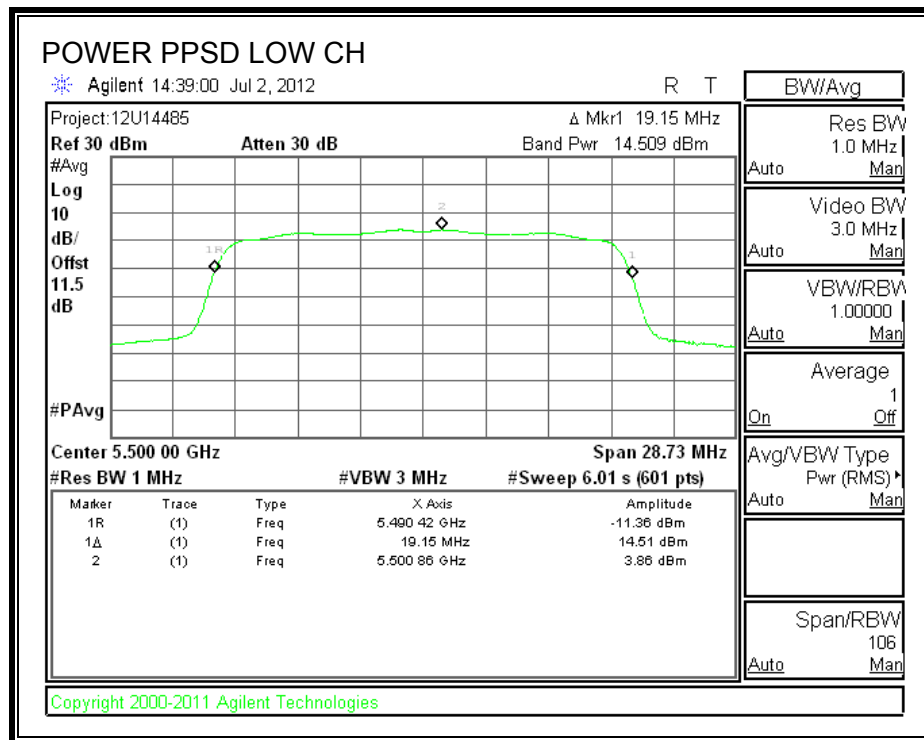

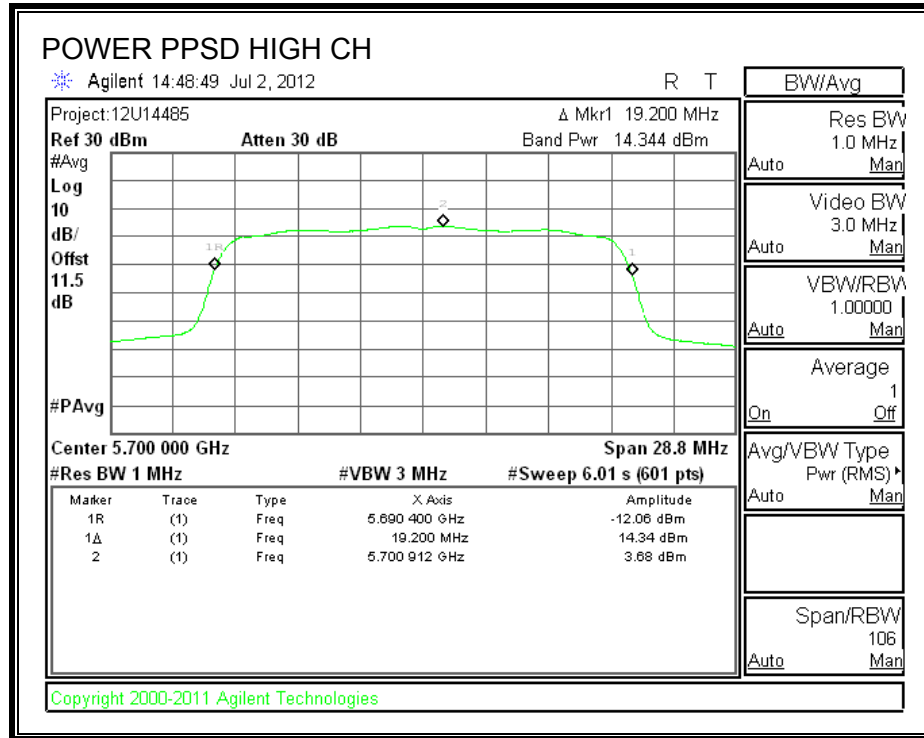

8.8.5. PEAK EXCURSION

LIMITS



FCC §15.407 (a) (6)


The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

RESULTS

Channel	Frequency (MHz)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Low	5500	9.43	13	-3.57
Mid	5580	9.48	13	-3.52
High	5700	9.50	13	-3.50

PEAK EXCURSION

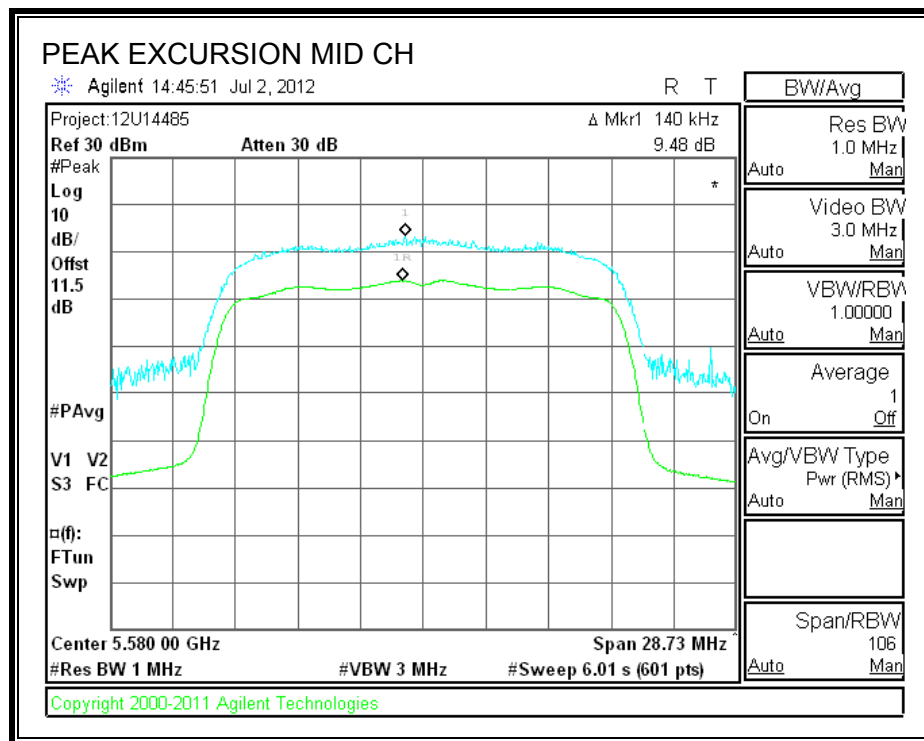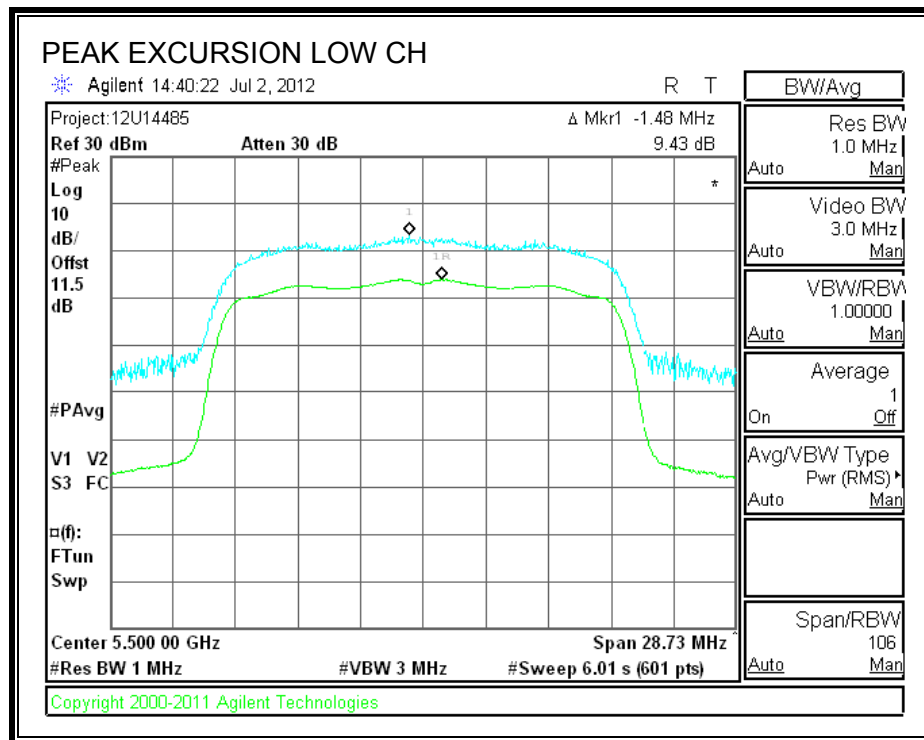

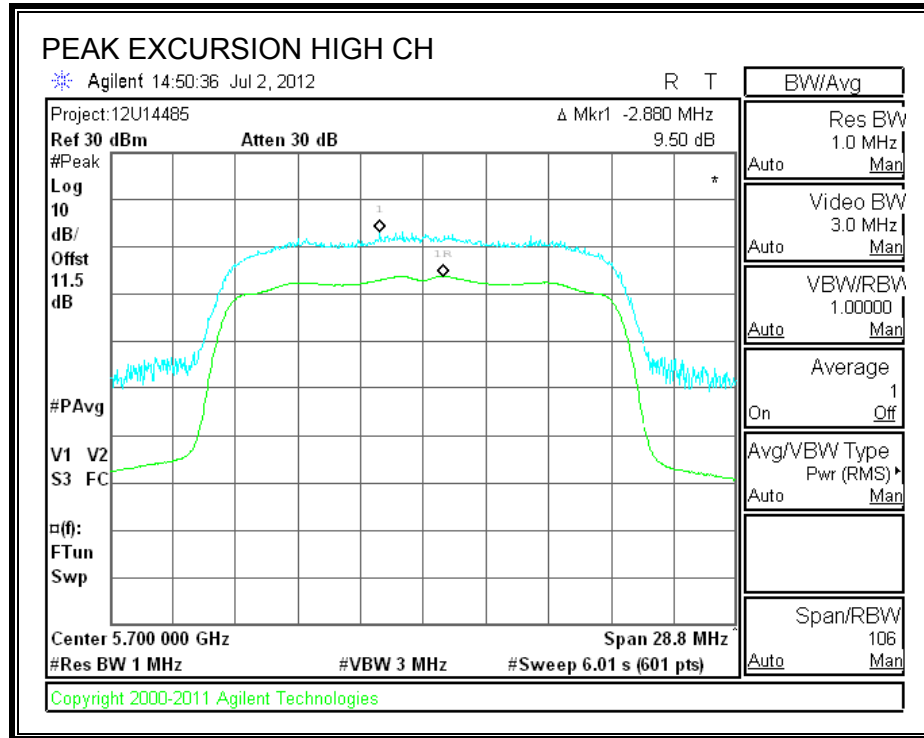

8.9. 802.11n HT40 MODE IN THE 5.6 GHz BAND

8.9.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5510	45.4
Mid	5550	45.1
High	5670	45.2

26 dB BANDWIDTH

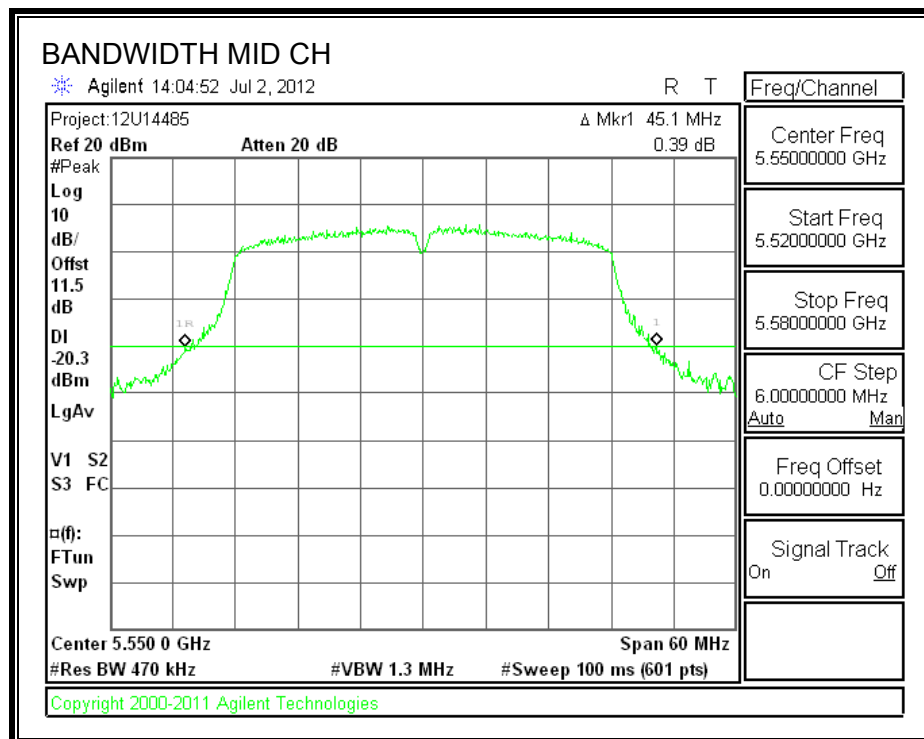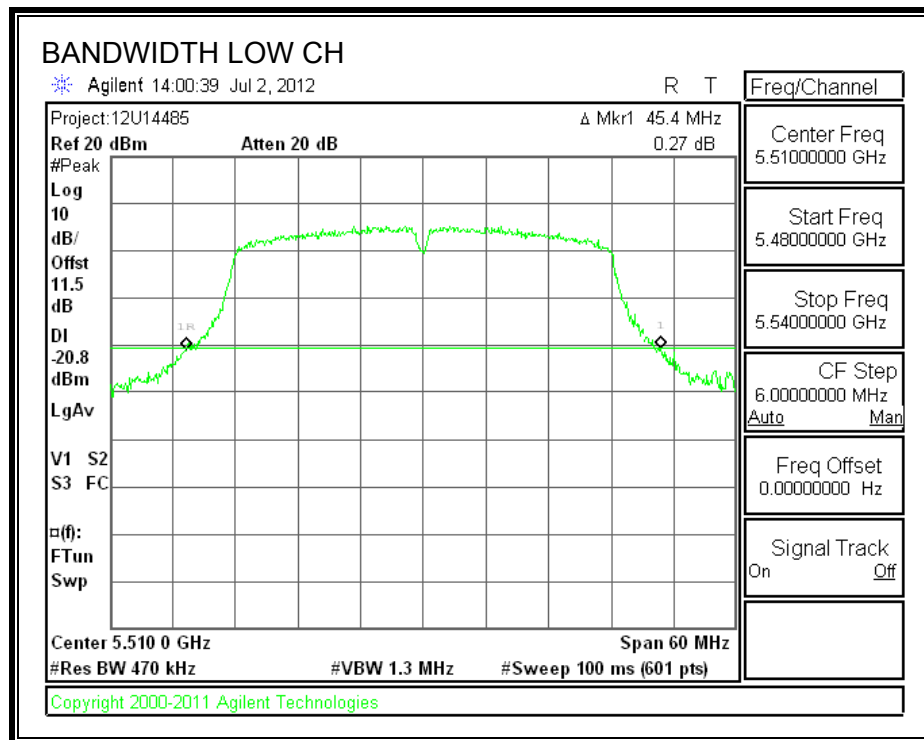

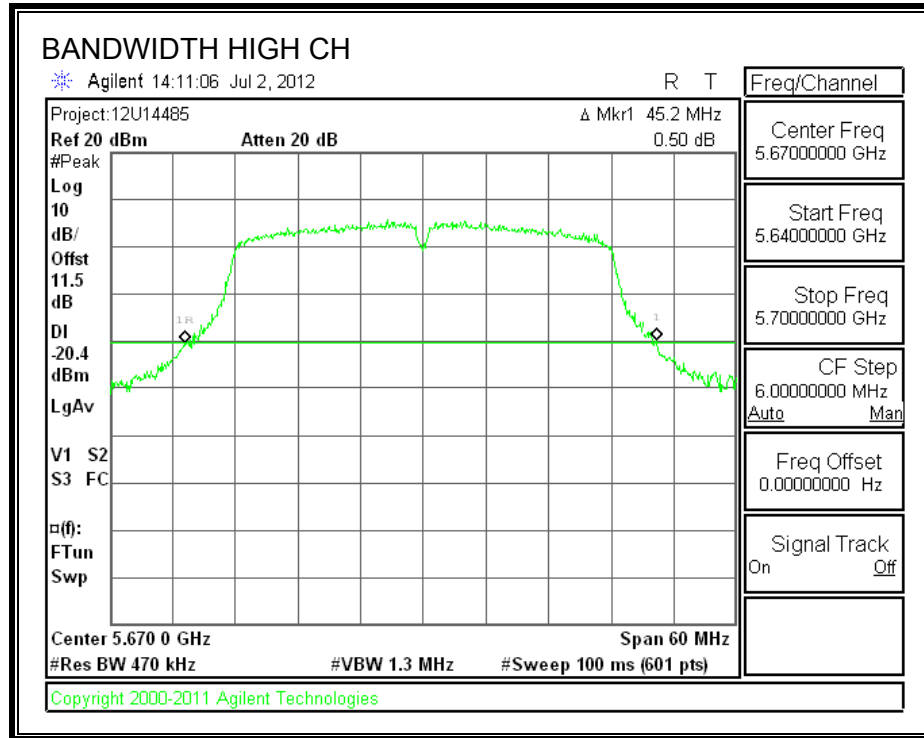

8.9.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5510	35.913
Mid	5550	35.863
High	5670	35.810

99% BANDWIDTH

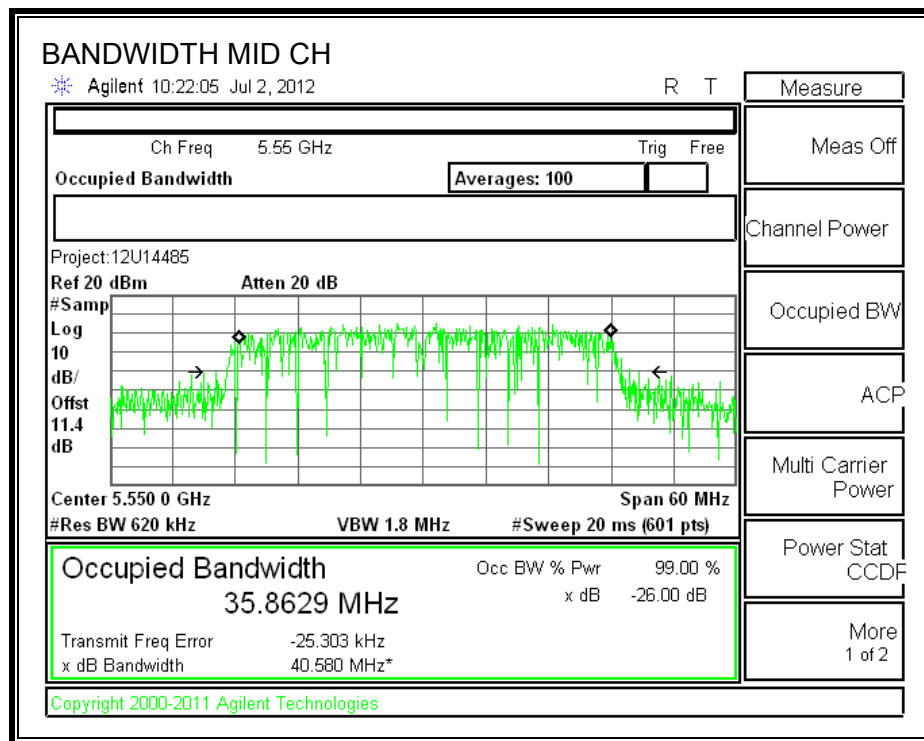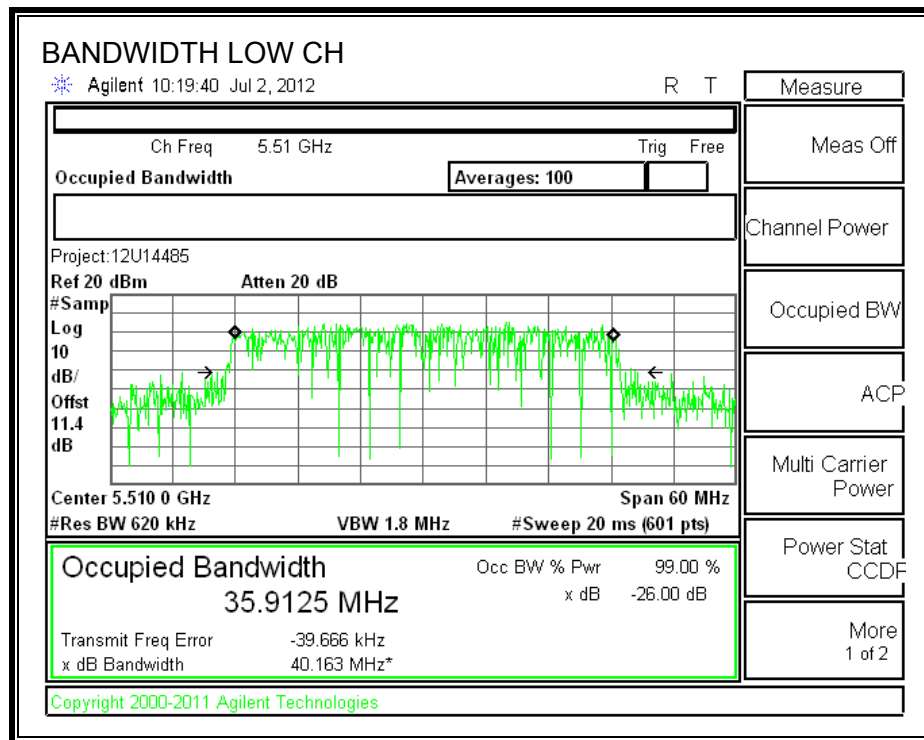

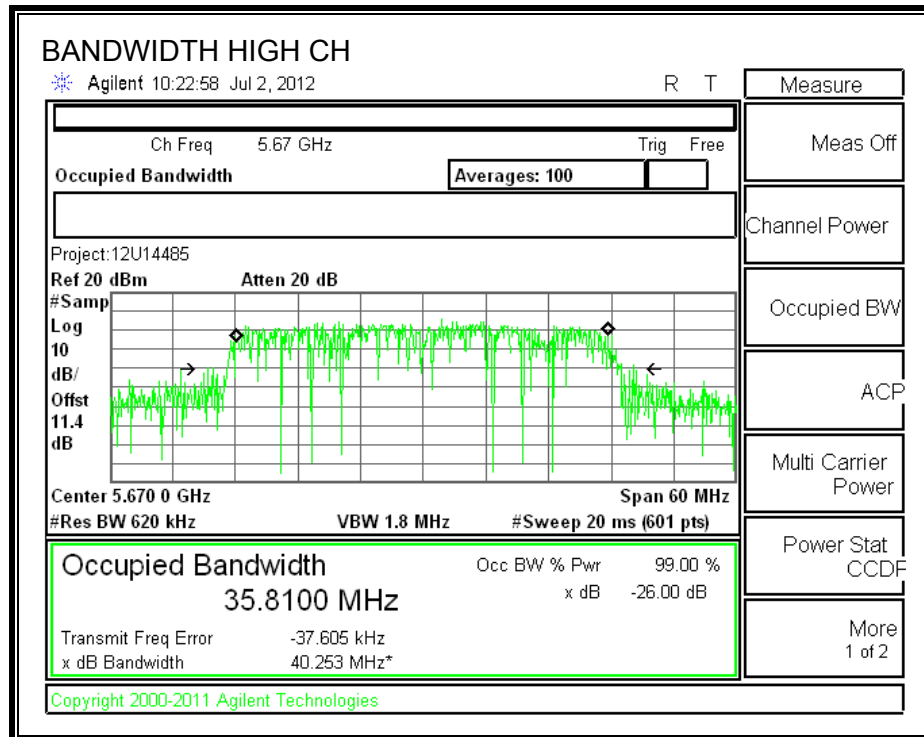

8.9.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11.4 dB (including 10 dB pad and 1.4 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5510	12.95
Mid	5550	12.96
High	5670	12.97

8.9.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (2)

IC RSS-210 A9.2 (3)

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 99% emission bandwidth for IC (26dB emission bandwidth for FCC) in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

99% bandwidth was used to calculate the power limit which was considered the worst case.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Limits

Channel	Frequency (MHz)	Fixed Limit (dBm)	B (MHz)	11 + 10 Log B Limit (dBm)	Directional Gain (dBi)	Power Limit (dBm)	PPSD Limit (dBm)
Low	5510	24	35.9	26.55	3.08	24.00	11.00
Mid	5550	24	35.9	26.55	3.08	24.00	11.00
High	5670	24	35.8	26.54	3.08	24.00	11.00

Duty Cycle CF (dB)	0.08	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



Output Power Results


Channel	Frequency (MHz)	Meas Power (dBm)	Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	14.34	14.42	24.00	-9.58
Mid	5550	14.19	14.27	24.00	-9.73
High	5670	14.23	14.31	24.00	-9.69

PPSD Results

Channel	Frequency (MHz)	Meas PPSD (dBm)	Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5510	0.26	0.34	11.00	-10.66
Mid	5550	0.11	0.19	11.00	-10.81
High	5670	0.18	0.26	11.00	-10.74

OUTPUT POWER AND PPSD

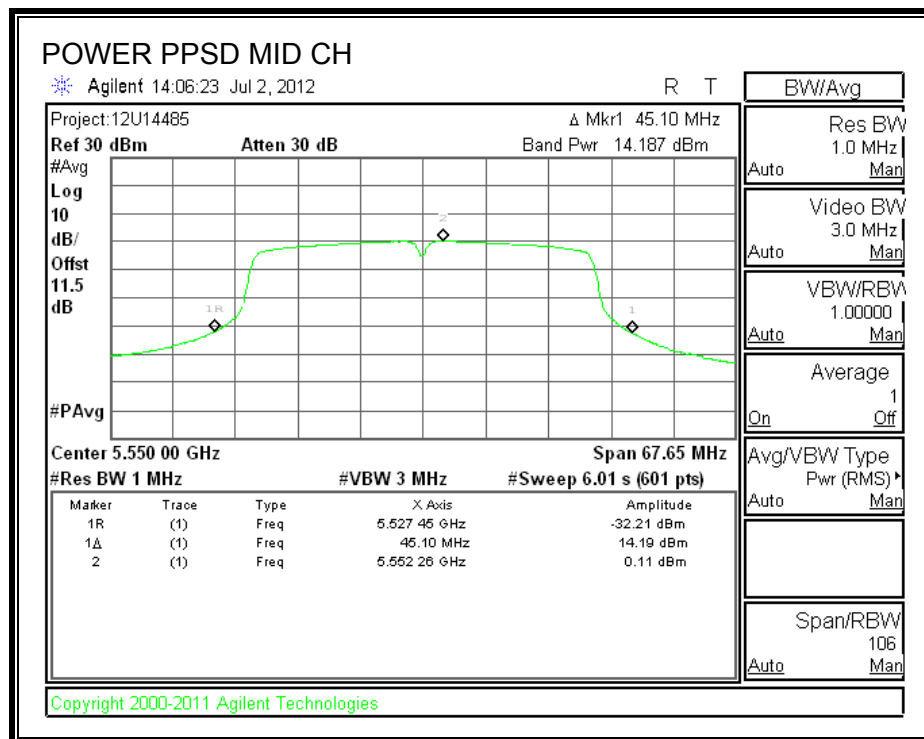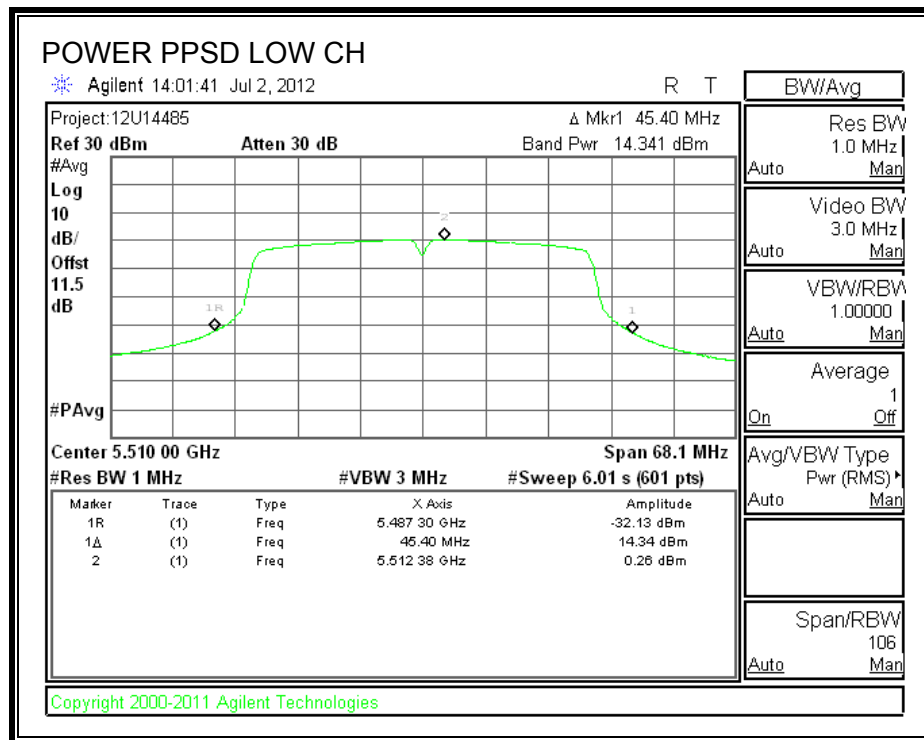

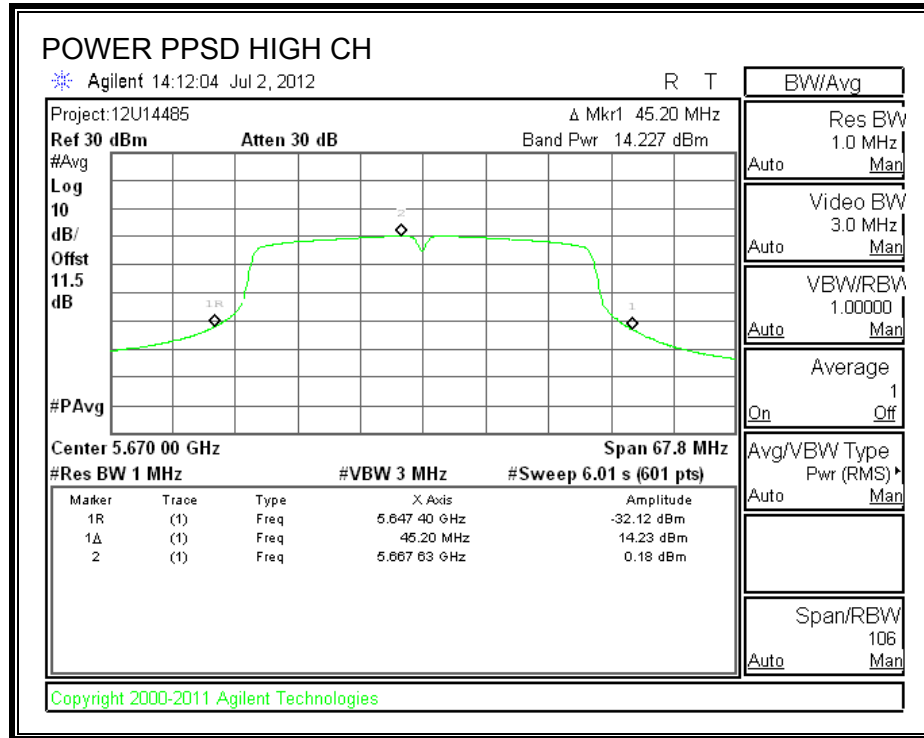

8.9.5. PEAK EXCURSION

LIMITS



FCC §15.407 (a) (6)


The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

RESULTS

Channel	Frequency (MHz)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Low	5510	10.20	13	-13.00
Mid	5550	9.66	13	-13.00
High	5670	9.50	13	-13.00

PEAK EXCURSION

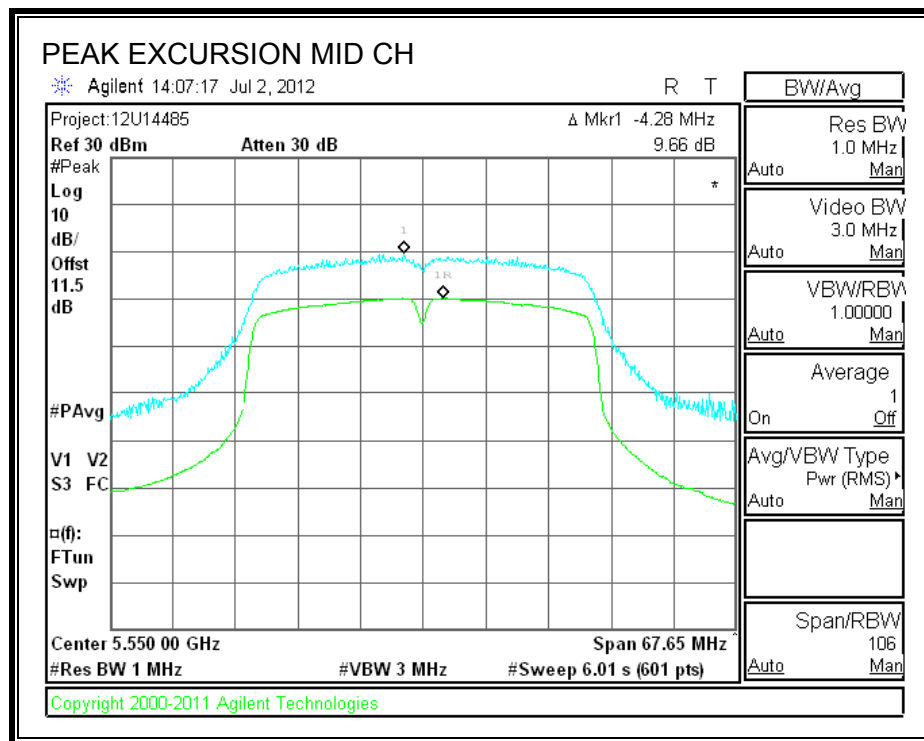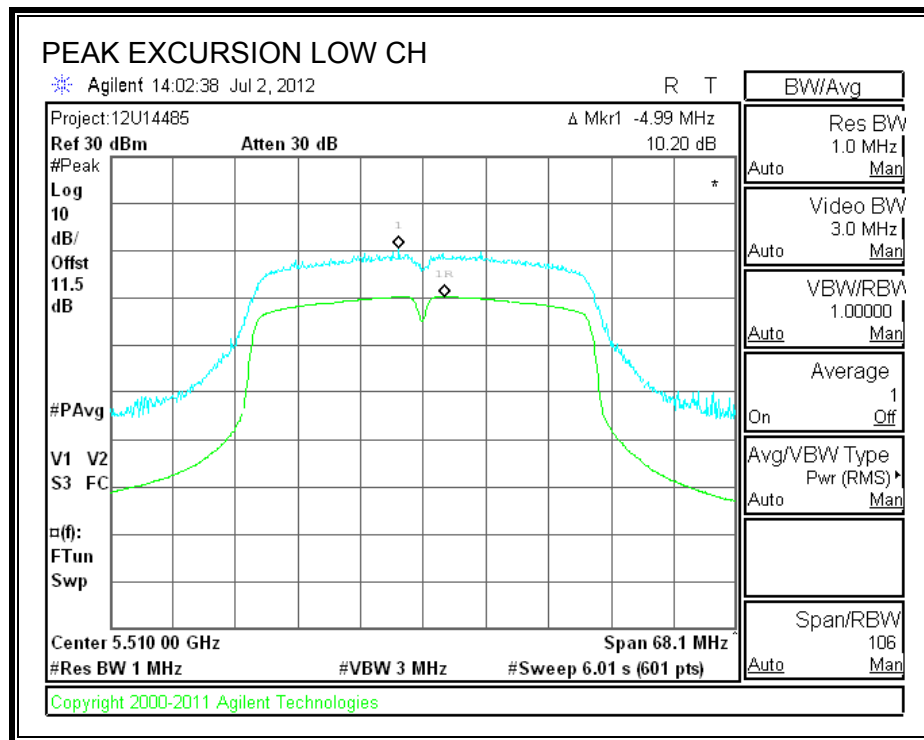

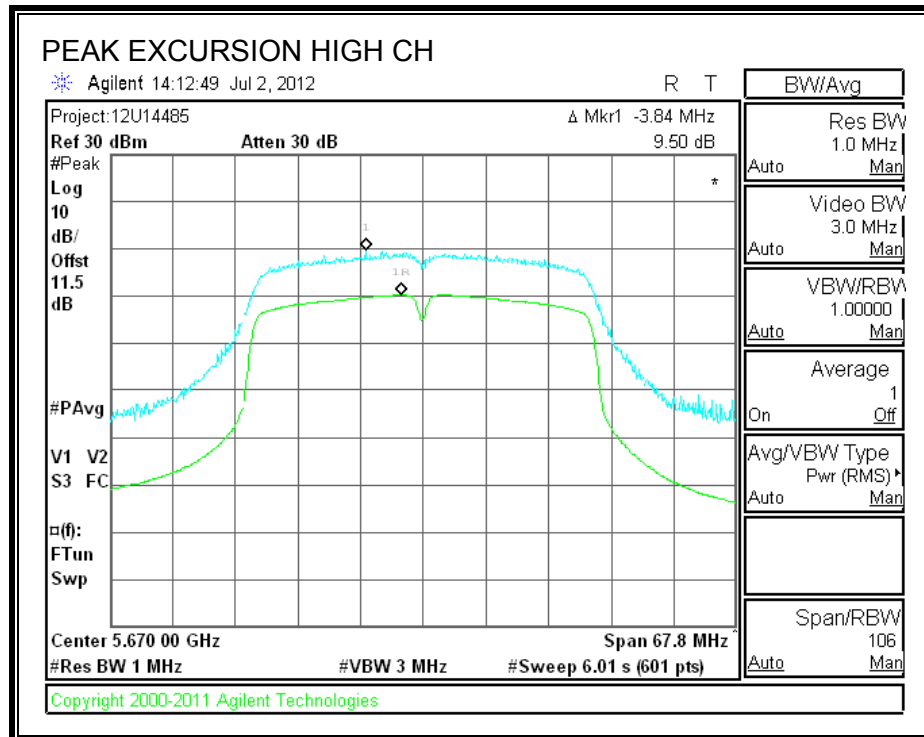

9. RADIATED TEST RESULTS

9.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 1 MHz for peak measurements and as applicable for average measurements.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.



9.2. TRANSMITTER ABOVE 1 GHz

9.2.1. TX ABOVE 1 GHz 802.11a MODE IN THE 5.2 GHz BAND

RESTRICTED BANDEDGE (LOW CHANNEL)

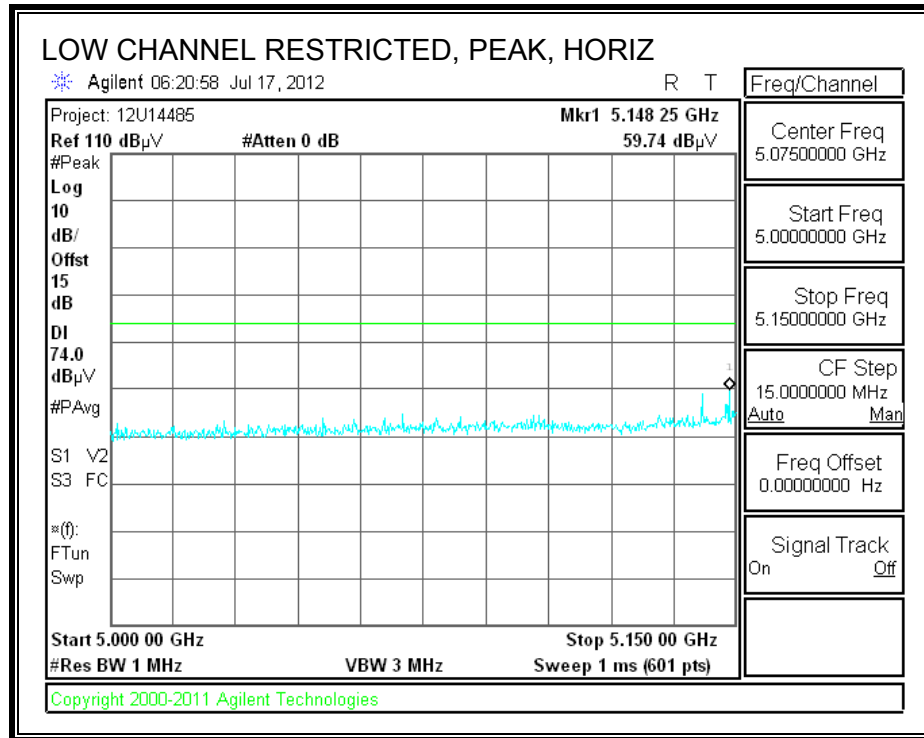

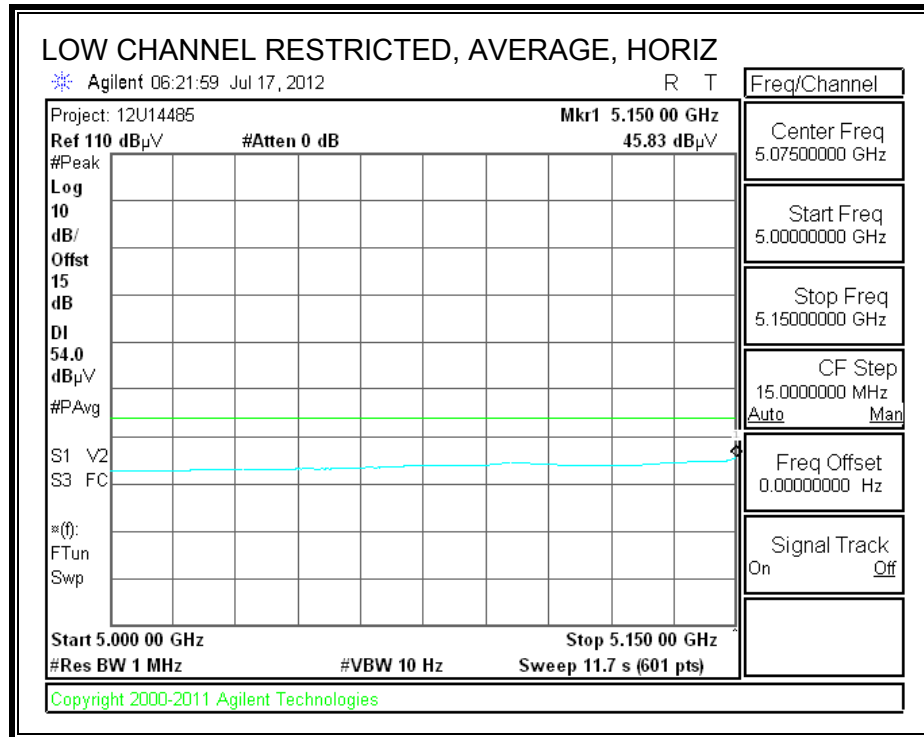

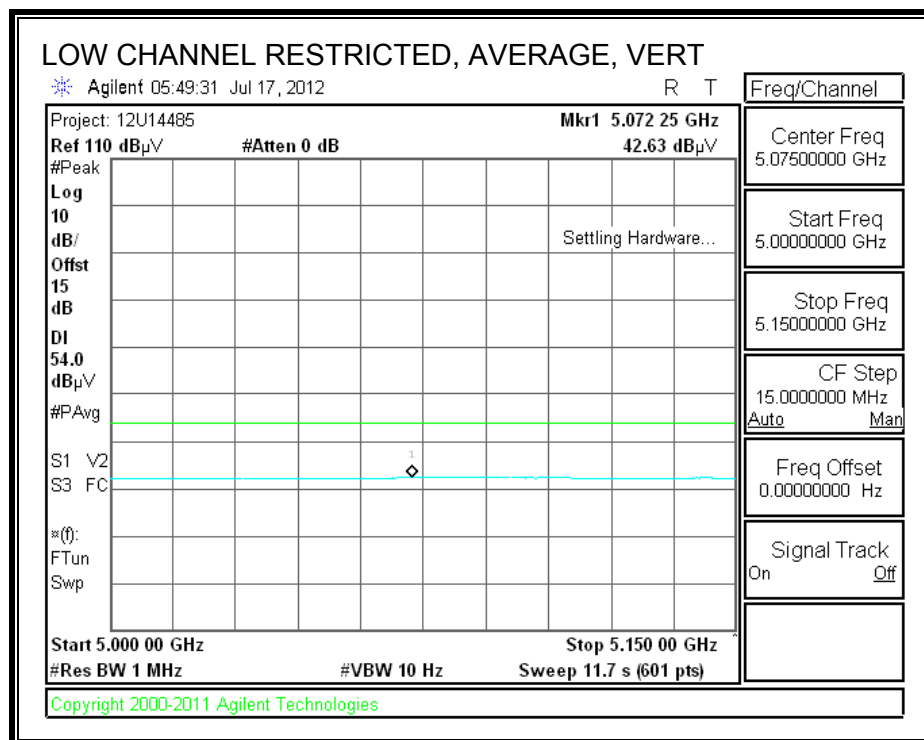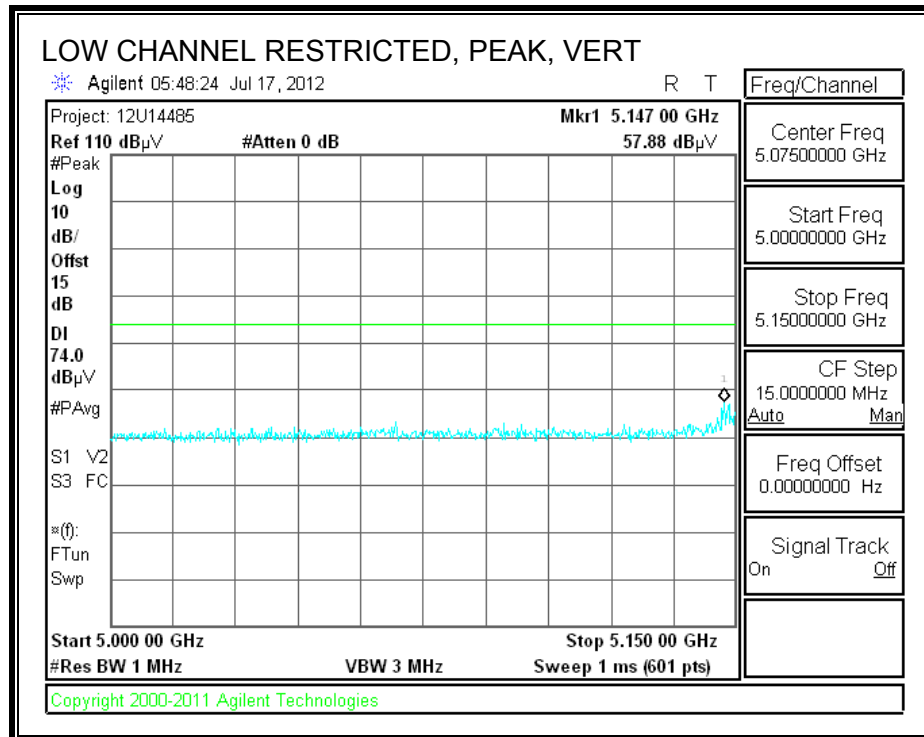

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber

Test Engr: Tom Chen
Date: 06/30/12
Project #: 12U14485
Company: Apple
Test Target: FCC Class B
Mode Oper: W52 802.11a, TX mode

f Measurement Frequency Amp Preamp Gain Average Field Strength Limit
Dist Distance to Antenna D Corr Distance Correct to 3 meters Peak Field Strength Limit
Read Analyzer Reading Avg Average Field Strength @ 3 m Margin vs. Average Limit
AF Antenna Factor Peak Calculated Peak Field Strength Margin vs. Peak Limit
CL Cable Loss HPF High Pass Filter


f GHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Notes
5180 MHz a mode													
15.540	3.0	36.3	39.1	12.5	-32.3	0.0	0.7	56.3	74.0	-17.7	V	P	
15.540	3.0	23.3	39.1	12.5	-32.3	0.0	0.7	43.3	54.0	-10.7	V	A	
15.540	3.0	36.9	39.1	12.5	-32.3	0.0	0.7	56.9	74.0	-17.1	H	P	
15.540	3.0	23.3	39.1	12.5	-32.3	0.0	0.7	43.3	54.0	-10.7	H	A	
5200MHz 11a													
15.600	3.0	35.8	38.9	12.2	-32.3	0.0	0.7	55.3	74.0	-18.7	H	P	
15.600	3.0	23.2	38.9	12.2	-32.3	0.0	0.7	42.8	54.0	-11.2	H	A	
15.600	3.0	35.7	38.9	12.2	-32.3	0.0	0.7	55.2	74.0	-18.8	V	P	
15.600	3.0	23.2	38.9	12.2	-32.3	0.0	0.7	42.8	54.0	-11.2	V	A	
5240MHz 11a													
15.720	3.0	36.0	38.5	12.3	-32.2	0.0	0.7	55.3	74.0	-18.7	H	P	
15.720	3.0	23.2	38.5	12.3	-32.2	0.0	0.7	42.4	54.0	-11.6	H	A	
15.720	3.0	37.3	38.5	12.3	-32.2	0.0	0.7	56.6	74.0	-17.4	V	P	
15.720	3.0	23.2	38.5	12.3	-32.2	0.0	0.7	42.4	54.0	-11.6	V	A	


Rev. 4.1.2.7



Note: No other emissions were detected above the system noise floor.

9.2.2. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.2 GHz BAND

RESTRICTED BANDEDGE (LOW CHANNEL)

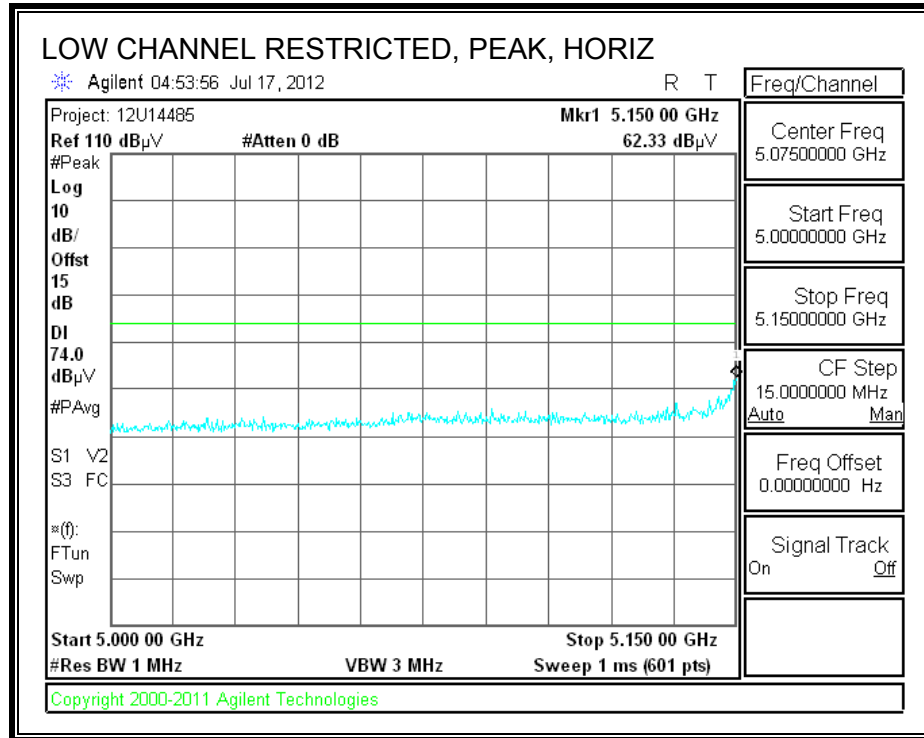

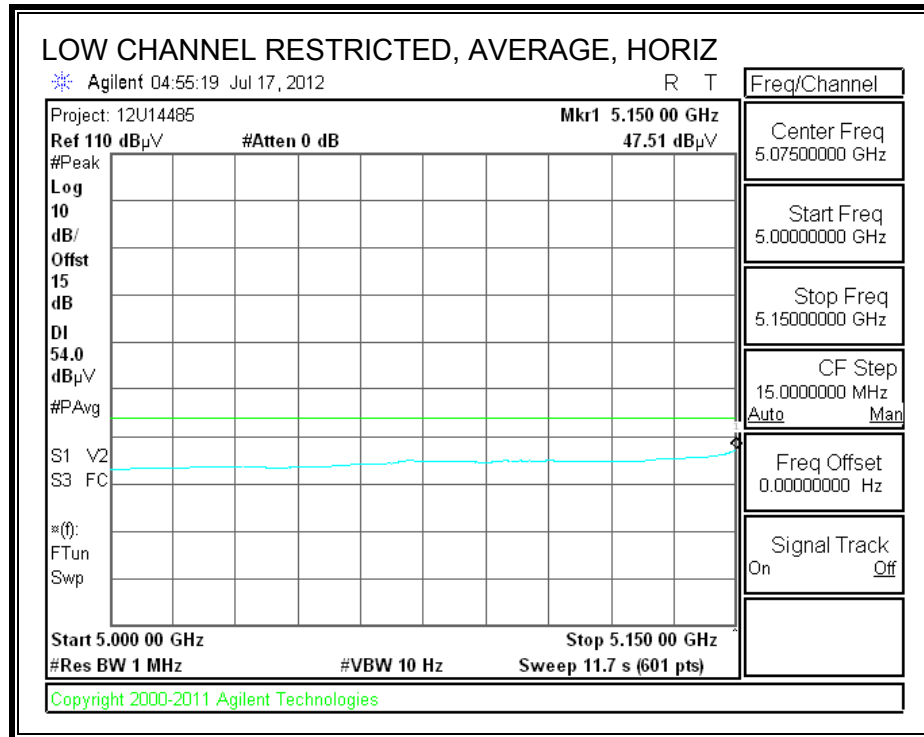

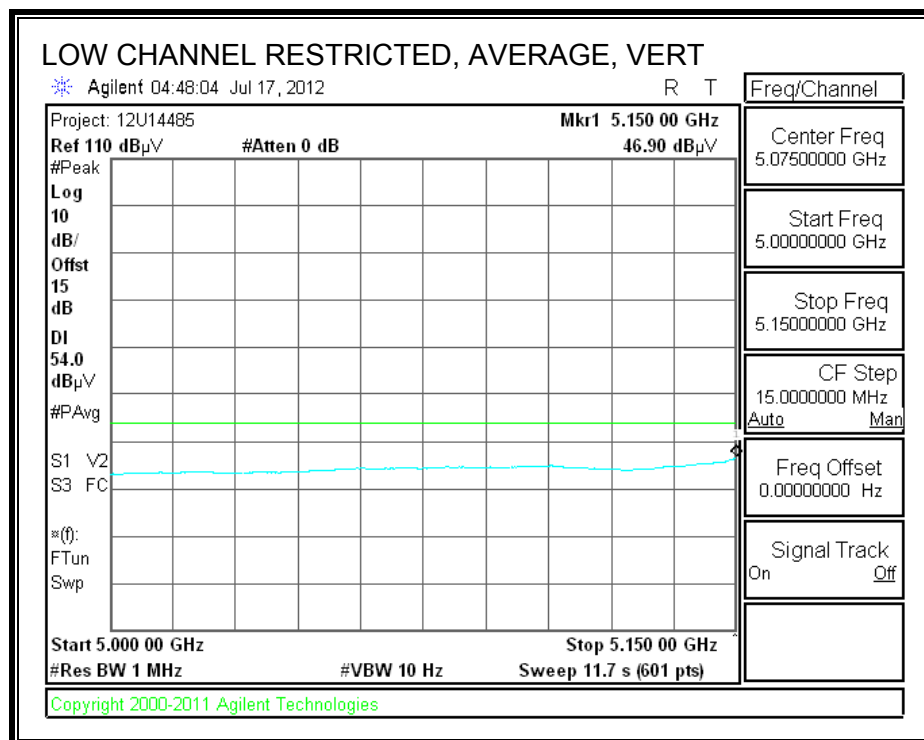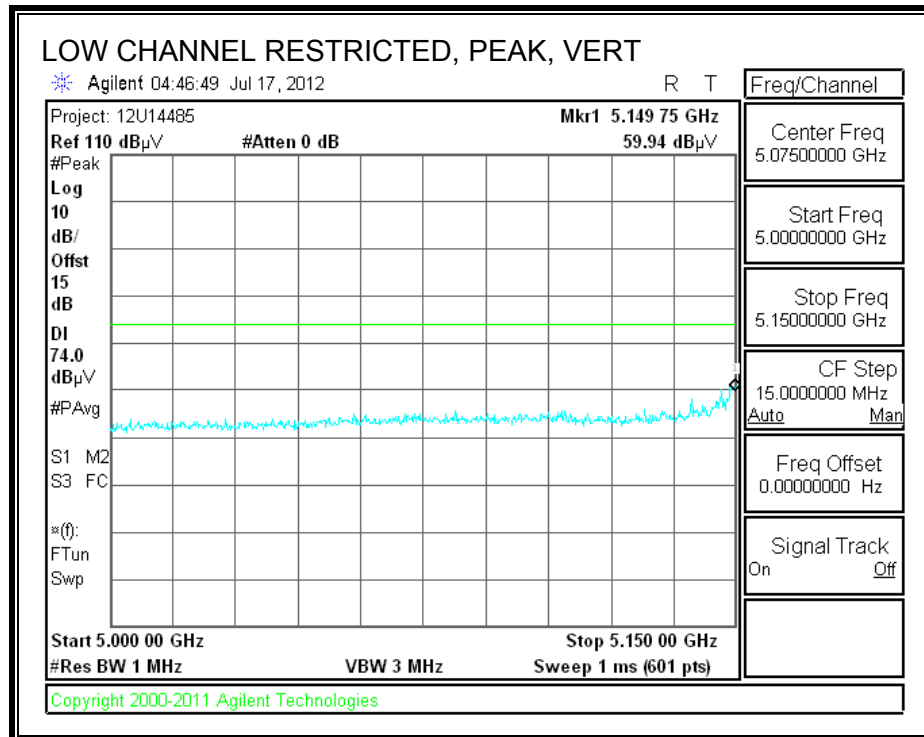

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement

Compliance Certification Services, Fremont 5m Chamber

Test Engr: Tom Chen
Date: 06/30/12
Project #: 12U14485
Company: Apple
Test Target: FCC Class B
Mode Oper: W52 802.11n, TX mode

f	Measurement Frequency	Amp	Preamp Gain	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter	


f GHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Ftr dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Notes
5180MHz 11n													
15.540	3.0	36.8	39.1	12.2	-32.3	0.0	0.7	56.5	74.0	-17.5	V	P	
15.540	3.0	23.2	39.1	12.2	-32.3	0.0	0.7	42.9	54.0	-11.1	V	A	
15.540	3.0	36.5	39.1	12.2	-32.3	0.0	0.7	56.2	74.0	-17.8	H	P	
15.540	3.0	23.2	39.1	12.2	-32.3	0.0	0.7	42.9	54.0	-11.1	H	A	
5200MHz 11n													
15.600	3.0	36.3	38.9	12.2	-32.3	0.0	0.7	55.8	74.0	-18.2	H	P	
15.600	3.0	23.2	38.9	12.2	-32.3	0.0	0.7	42.8	54.0	-11.2	H	A	
15.600	3.0	36.1	38.9	12.2	-32.3	0.0	0.7	55.7	74.0	-18.3	V	P	
15.600	3.0	23.2	38.9	12.2	-32.3	0.0	0.7	42.8	54.0	-11.2	V	A	
5240MHz 11n													
15.720	3.0	36.4	38.5	12.3	-32.2	0.0	0.7	55.7	74.0	-18.3	V	P	
15.720	3.0	23.2	38.5	12.3	-32.2	0.0	0.7	42.5	54.0	-11.5	V	A	
15.720	3.0	36.8	38.5	12.3	-32.2	0.0	0.7	56.0	74.0	-18.0	H	P	
15.720	3.0	23.2	38.5	12.3	-32.2	0.0	0.7	42.4	54.0	-11.6	H	A	


Rev. 4.1.2.7



Note: No other emissions were detected above the system noise floor.

9.2.3. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.2 GHz BAND

RESTRICTED BANDEDGE (LOW CHANNEL)

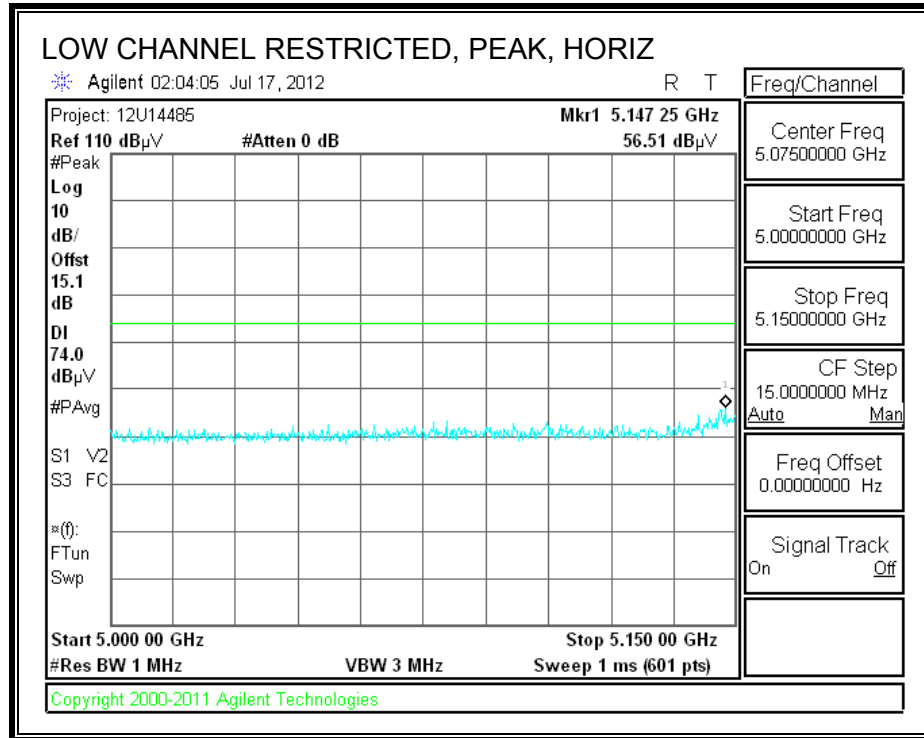

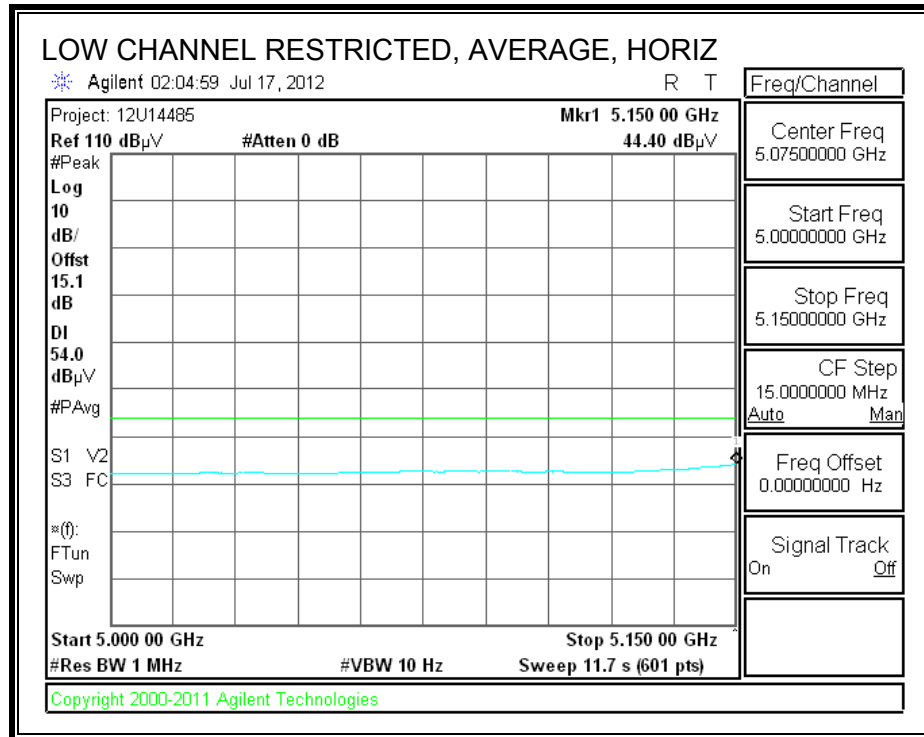

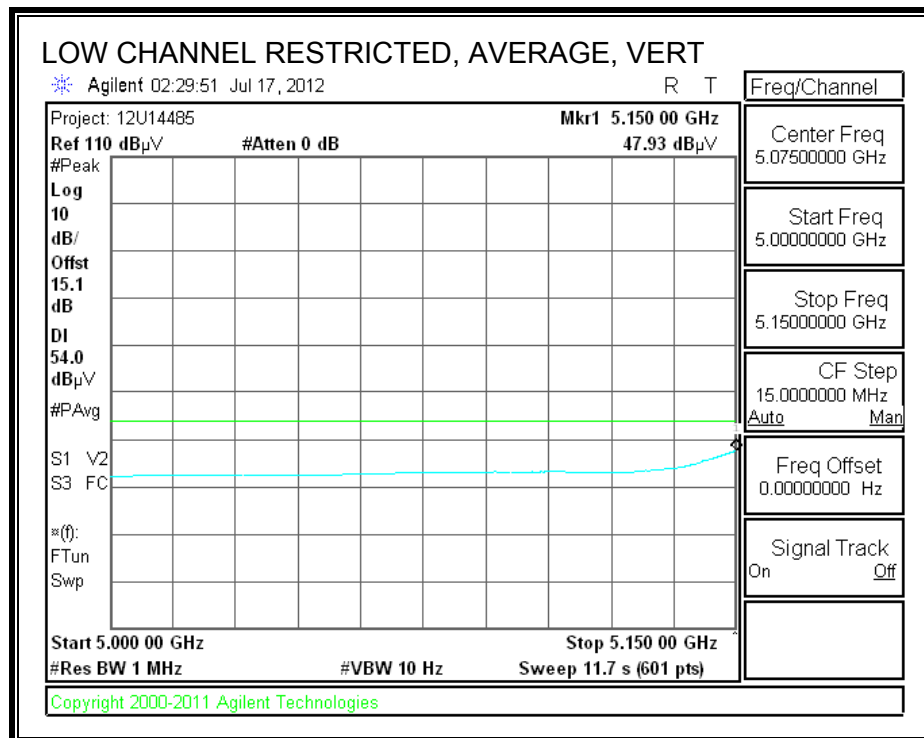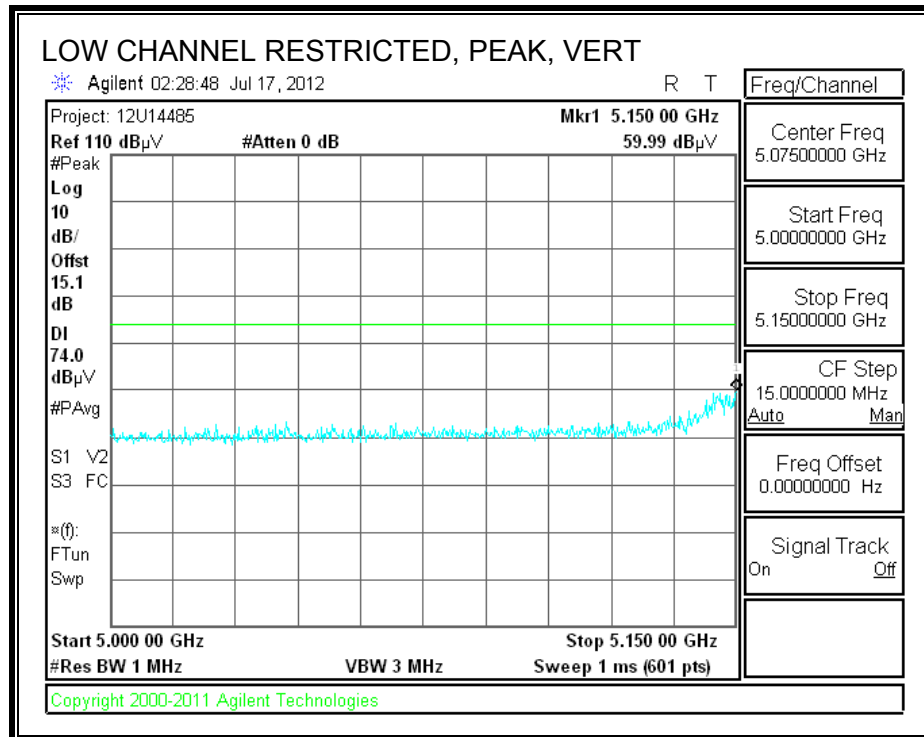

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement

Compliance Certification Services, Fremont 5m Chamber

Test Engr: Tom Chen
Date: 06/30/12
Project #: 12U14485
Company: Apple
Test Target: FCC Class B
Mode Oper: W52 802.11n HT40, TX mode

f	Measurement Frequency	Amp	Preamp Gain	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter	


f GHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Notes
5190MHz HT40													
15.570	3.0	36.3	39.0	12.2	-32.3	0.0	0.7	56.0	74.0	-18.0	H	P	
15.570	3.0	23.2	39.0	12.2	-32.3	0.0	0.7	42.9	54.0	-11.1	H	A	
15.570	3.0	35.6	39.0	12.2	-32.3	0.0	0.7	55.2	74.0	-18.8	V	P	
15.570	3.0	23.3	39.0	12.2	-32.3	0.0	0.7	42.9	54.0	-11.1	V	A	
5230MHz HT40													
15.690	3.0	36.2	38.6	12.3	-32.3	0.0	0.7	55.5	74.0	-18.5	V	P	
15.690	3.0	23.1	38.6	12.3	-32.3	0.0	0.7	42.4	54.0	-11.6	V	A	
15.690	3.0	36.2	38.6	12.3	-32.3	0.0	0.7	55.6	74.0	-18.4	H	P	
15.690	3.0	23.1	38.6	12.3	-32.3	0.0	0.7	42.5	54.0	-11.6	H	A	


Rev. 4.1.2.7



Note: No other emissions were detected above the system noise floor.

9.2.4. TX ABOVE 1 GHz 802.11a MODE IN THE 5.3 GHz BAND

RESTRICTED BANDEDGE (HIGH CHANNEL)

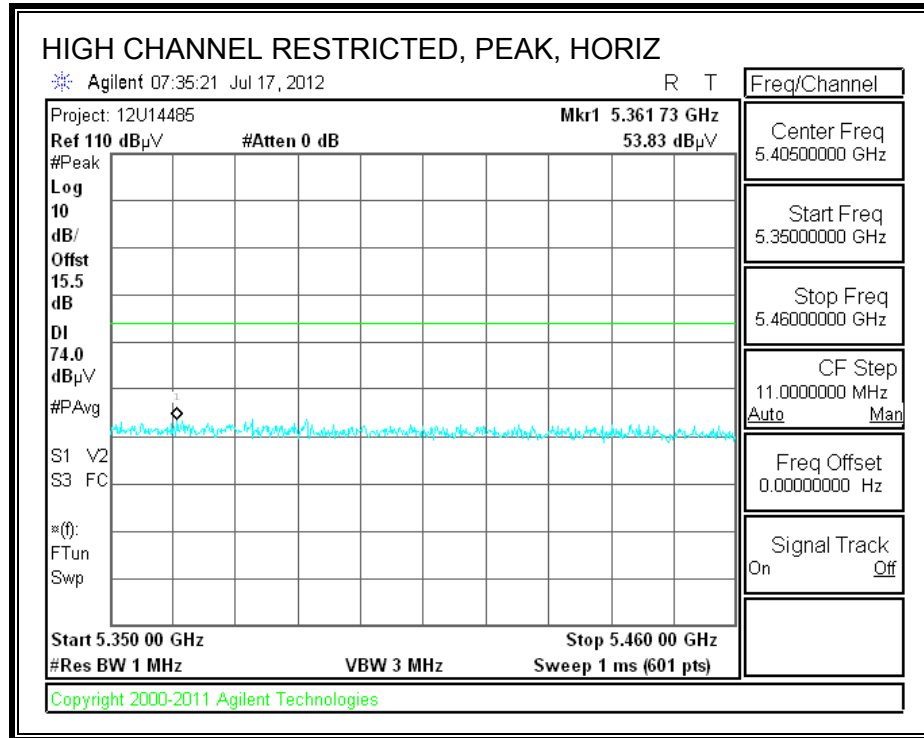

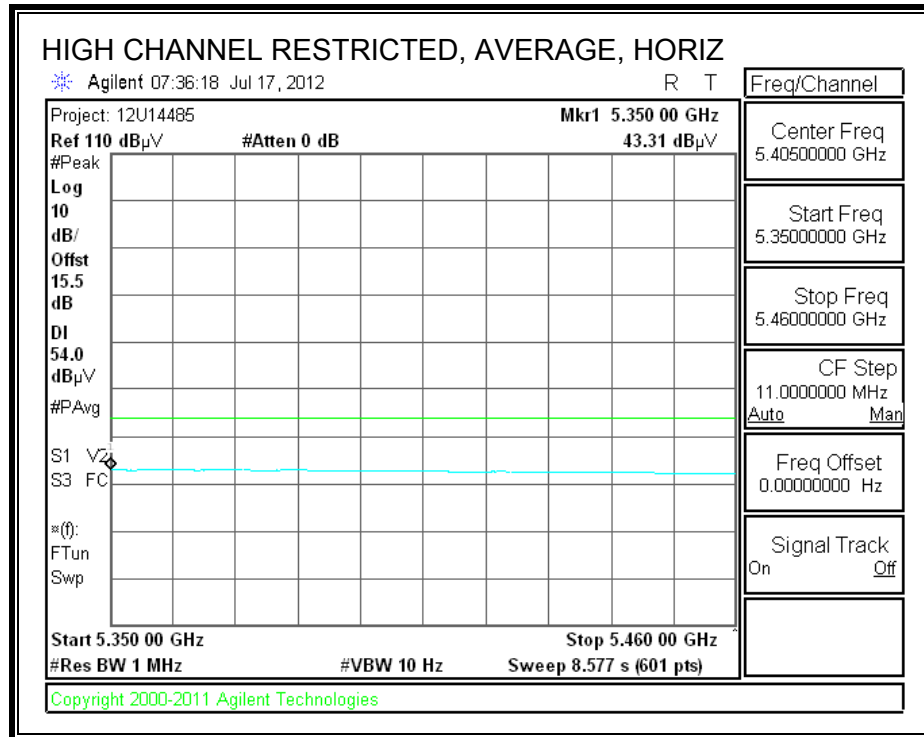

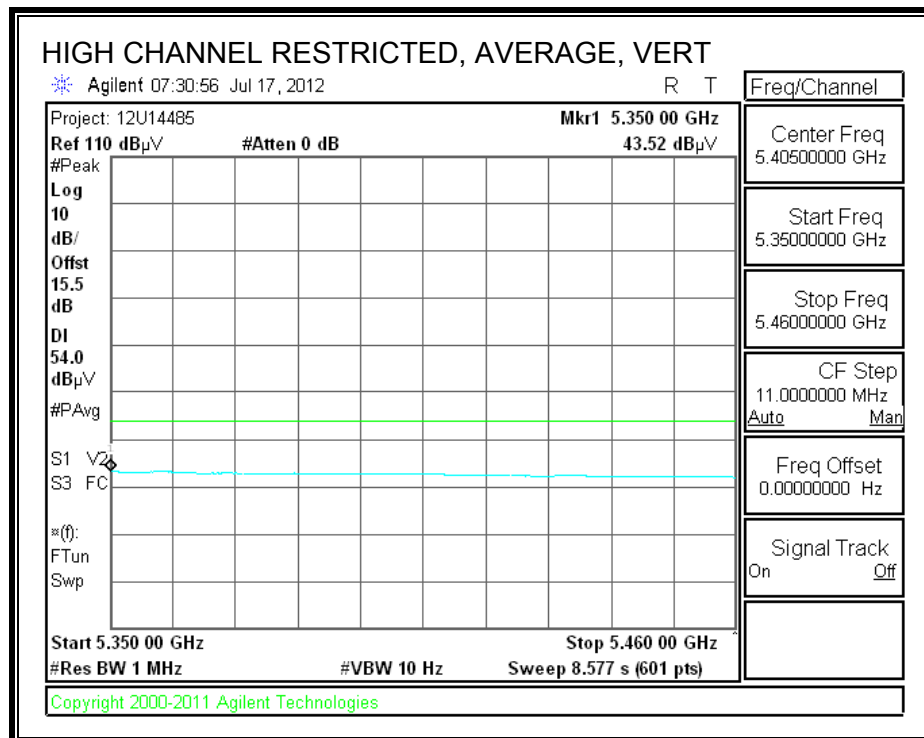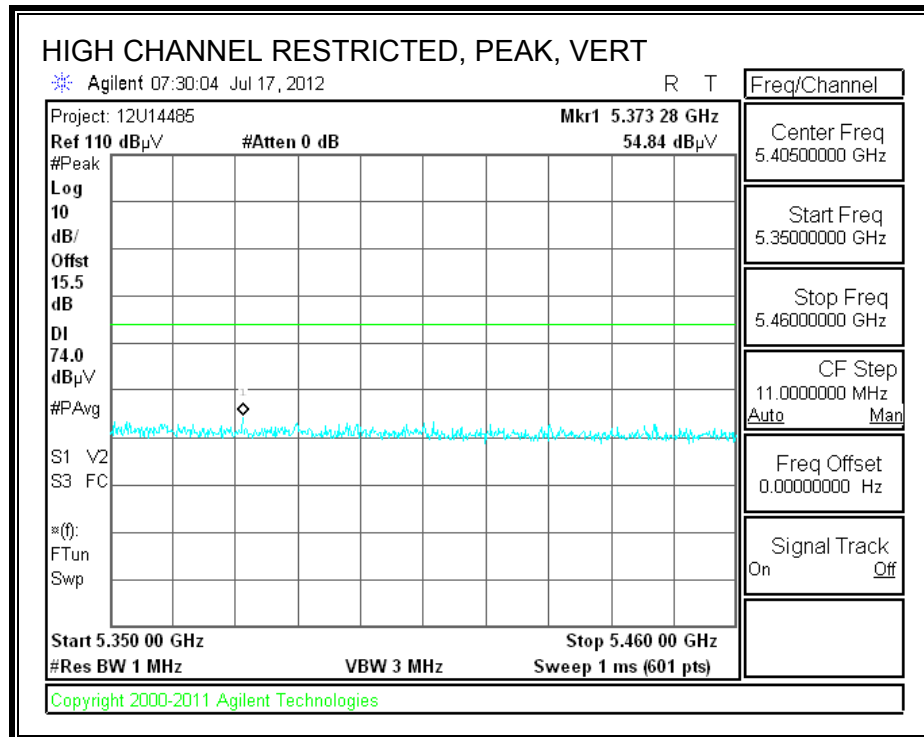

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber

Test Engr: Tom Chen
Date: 06/30/12
Project #: 12U14485
Company: Apple
Test Target: FCC Class B
Mode Oper: W53 802.11a, TX mode

f Measurement Frequency Amp Preamp Gain Average Field Strength Limit
Dist Distance to Antenna D Corr Distance Correct to 3 meters Peak Field Strength Limit
Read Analyzer Reading Avg Average Field Strength @ 3 m Margin vs. Average Limit
AF Antenna Factor Peak Calculated Peak Field Strength Margin vs. Peak Limit
CL Cable Loss HPF High Pass Filter


f GHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Notes
5260MHz 11a													
15.780	3.0	36.4	38.3	12.3	-32.2	0.0	0.7	55.5	74.0	-18.5	H	P	
15.780	3.0	22.8	38.3	12.3	-32.2	0.0	0.7	42.0	54.0	-12.0	H	A	
15.780	3.0	36.0	38.3	12.3	-32.2	0.0	0.7	55.1	74.0	-18.9	V	P	
15.780	3.0	22.9	38.3	12.3	-32.2	0.0	0.7	42.0	54.0	-12.0	V	A	
5300MHz 11a													
15.900	3.0	34.7	37.9	12.4	-32.2	0.0	0.7	53.5	74.0	-20.5	V	P	
15.900	3.0	22.2	37.9	12.4	-32.2	0.0	0.7	41.0	54.0	-13.0	V	A	
15.900	3.0	35.7	37.9	12.4	-32.2	0.0	0.7	54.5	74.0	-19.5	H	P	
15.900	3.0	22.1	37.9	12.4	-32.2	0.0	0.7	40.9	54.0	-13.1	H	A	
5320MHz 11a													
10.640	3.0	35.3	38.2	9.8	-33.9	0.0	0.8	50.1	74.0	-23.9	H	P	
10.640	3.0	22.3	38.2	9.8	-33.9	0.0	0.8	37.2	54.0	-16.8	H	A	
15.960	3.0	35.5	37.7	12.4	-32.2	0.0	0.7	54.2	74.0	-19.8	H	P	
15.960	3.0	22.3	37.7	12.4	-32.2	0.0	0.7	41.0	54.0	-13.0	H	A	
5320MHz 11a													
10.640	3.0	34.8	38.2	9.8	-33.9	0.0	0.8	49.6	74.0	-24.4	V	P	
10.640	3.0	22.2	38.2	9.8	-33.9	0.0	0.8	37.0	54.0	-17.0	V	A	
15.960	3.0	35.2	37.7	12.4	-32.2	0.0	0.7	53.9	74.0	-20.1	V	P	
15.960	3.0	22.3	37.7	12.4	-32.2	0.0	0.7	41.0	54.0	-13.0	V	A	


Rev. 4.1.2.7



Note: No other emissions were detected above the system noise floor.

9.2.5. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.3 GHz BAND

RESTRICTED BANDEDGE (HIGH CHANNEL)

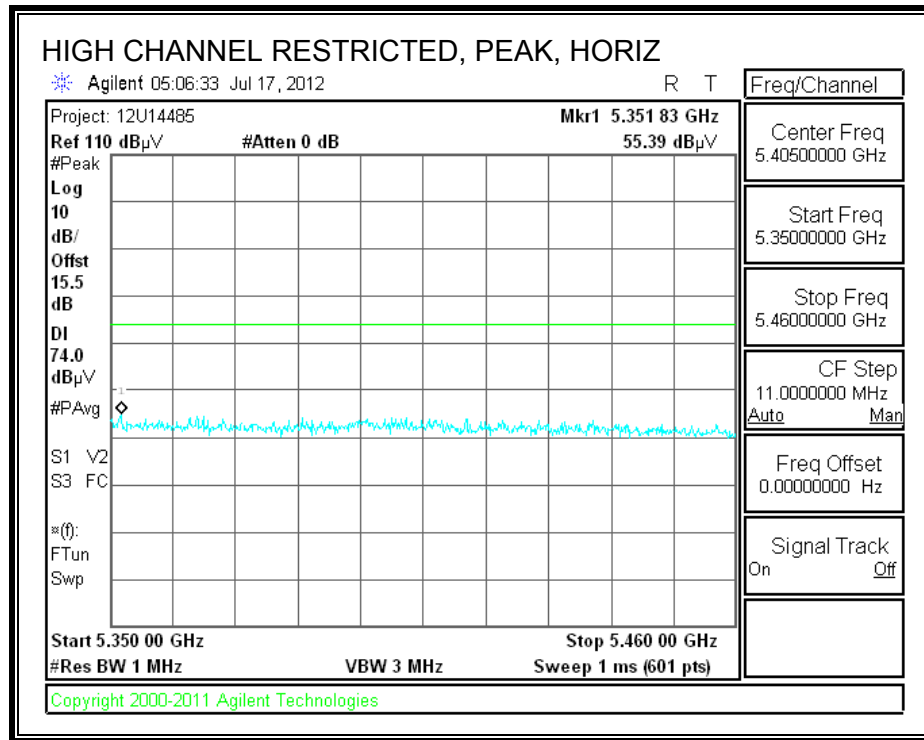

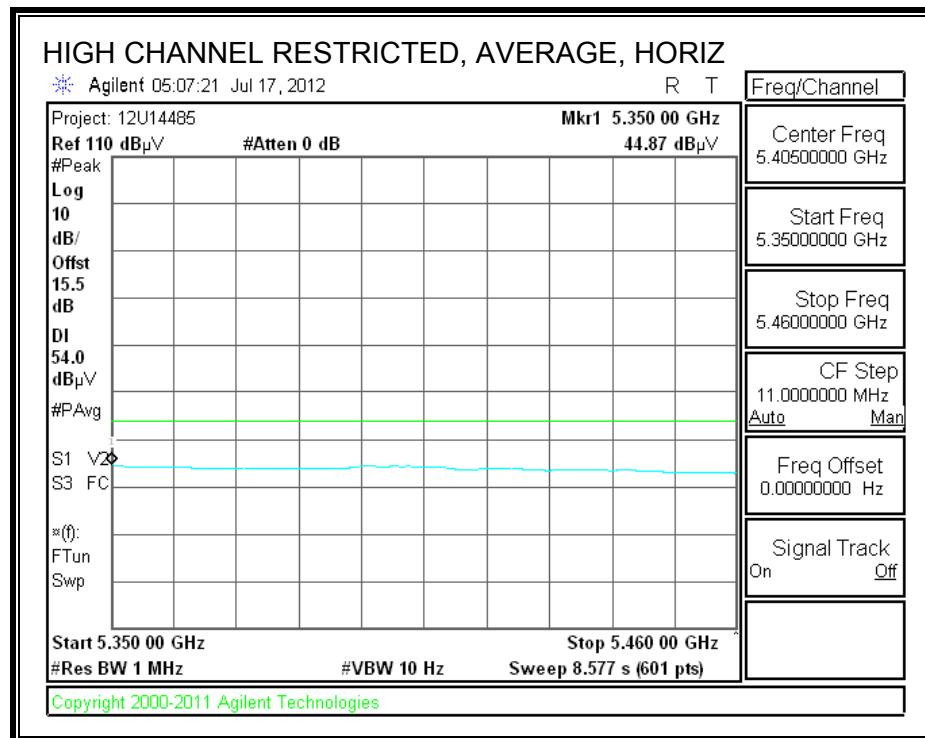

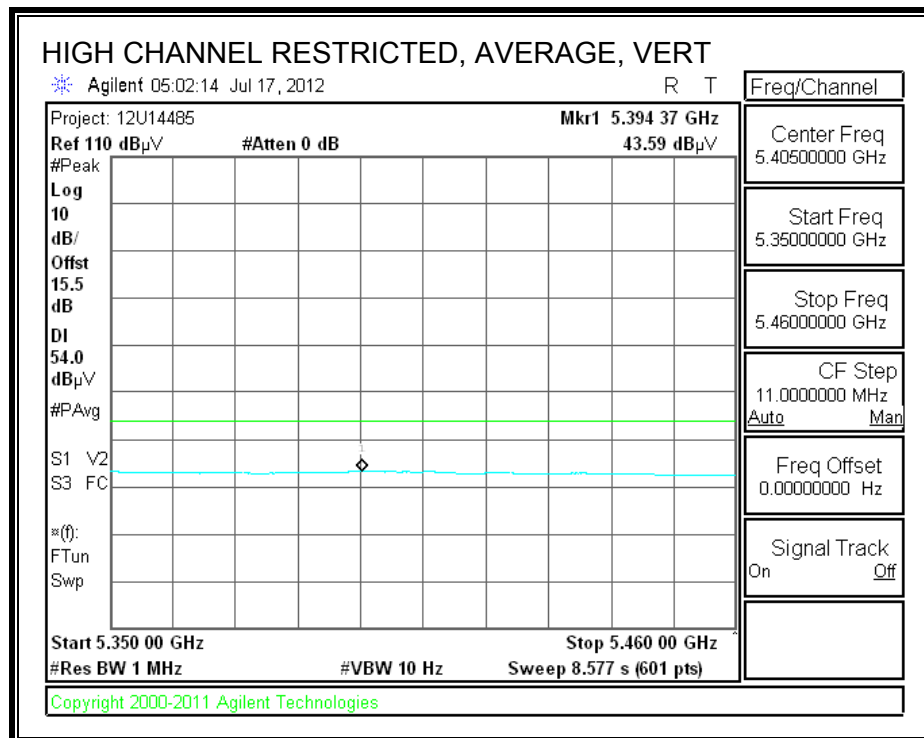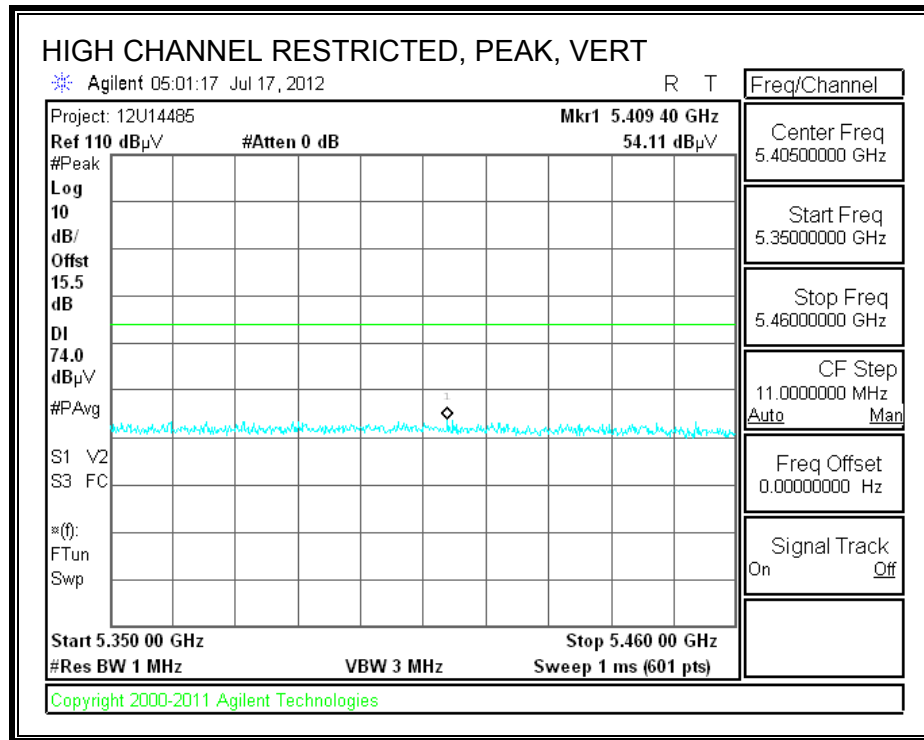

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement

Compliance Certification Services, Fremont 5m Chamber

Test Engr: Tom Chen
Date: 06/30/12
Project #: 12U14485
Company: Apple
Test Target: FCC Class B
Mode Oper: W53 802.11n, TX mode

f	Measurement Frequency	Amp	Preamp Gain	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter	


f GHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Ftr dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Notes
5260MHz 11n													
15.780	3.0	36.5	38.3	12.3	-32.2	0.0	0.7	55.6	74.0	-18.4	V	P	
15.780	3.0	22.8	38.3	12.3	-32.2	0.0	0.7	41.9	54.0	-12.1	V	A	
15.780	3.0	35.9	38.3	12.3	-32.2	0.0	0.7	55.0	74.0	-19.0	H	P	
15.780	3.0	22.8	38.3	12.3	-32.2	0.0	0.7	41.9	54.0	-12.1	H	A	
5300MHz 11n													
15.900	3.0	34.9	37.9	12.4	-32.2	0.0	0.7	53.7	74.0	-20.3	H	P	
15.900	3.0	22.1	37.9	12.4	-32.2	0.0	0.7	40.9	54.0	-13.1	H	A	
15.900	3.0	35.3	37.9	12.4	-32.2	0.0	0.7	54.1	74.0	-19.9	V	P	
15.900	3.0	22.2	37.9	12.4	-32.2	0.0	0.7	41.0	54.0	-13.0	V	A	
5320MHz 11n													
15.960	3.0	35.0	37.7	12.4	-32.2	0.0	0.7	53.7	74.0	-20.3	H	P	
15.960	3.0	22.3	37.7	12.4	-32.2	0.0	0.7	40.9	54.0	-13.1	H	A	
15.960	3.0	35.5	37.7	12.4	-32.2	0.0	0.7	54.1	74.0	-19.9	V	P	
15.960	3.0	22.3	37.7	12.4	-32.2	0.0	0.7	40.9	54.0	-13.1	V	A	


Rev. 4.1.2.7



Note: No other emissions were detected above the system noise floor.

9.2.6. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.3 GHz BAND

RESTRICTED BANDEDGE (HIGH CHANNEL)

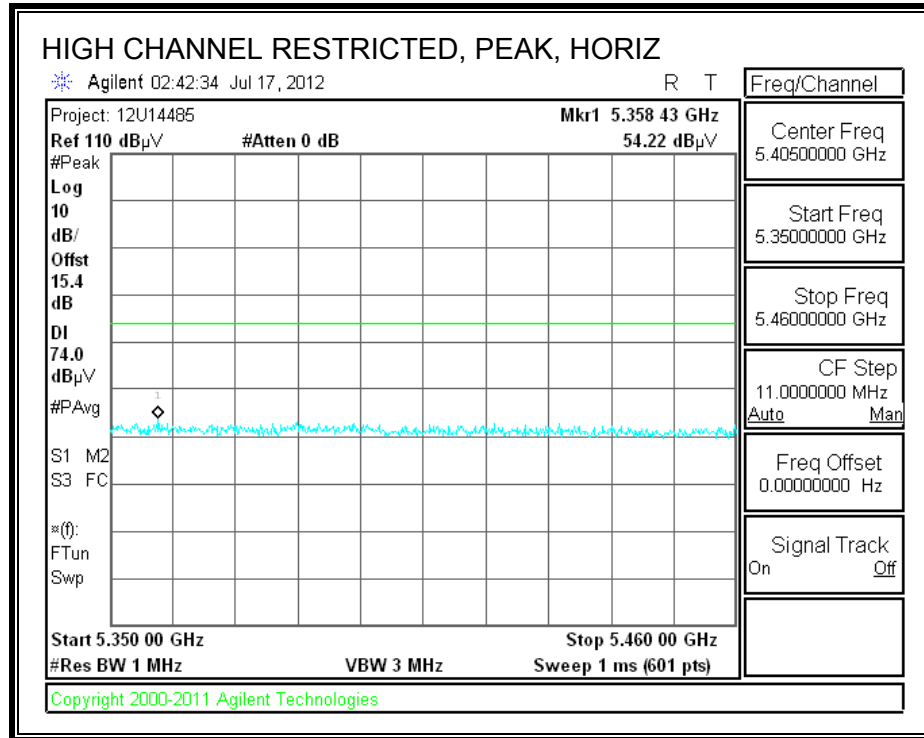

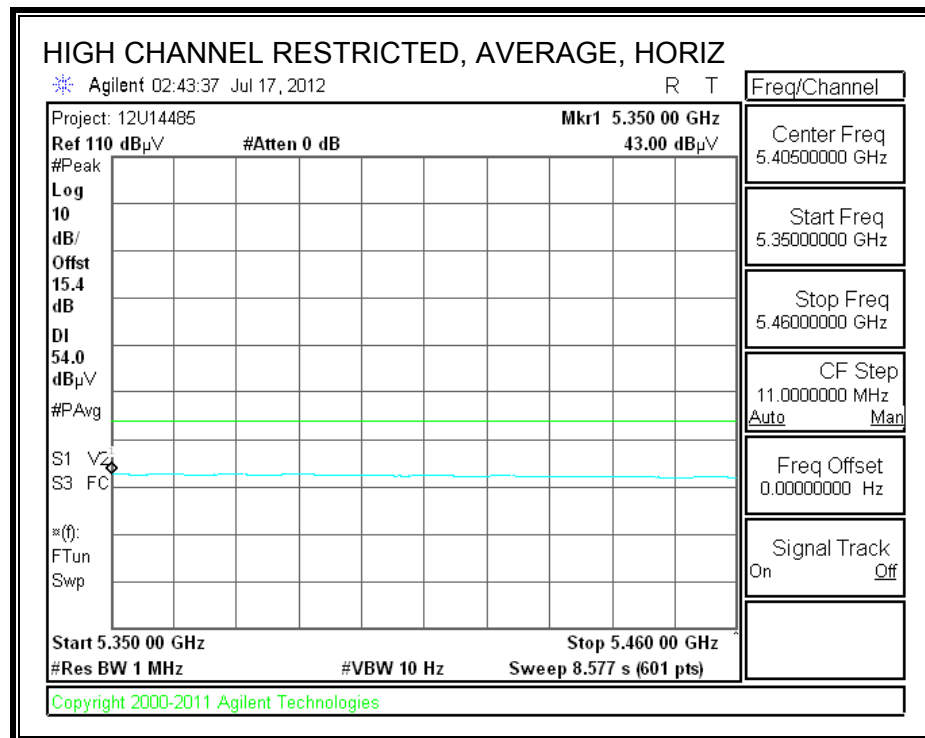

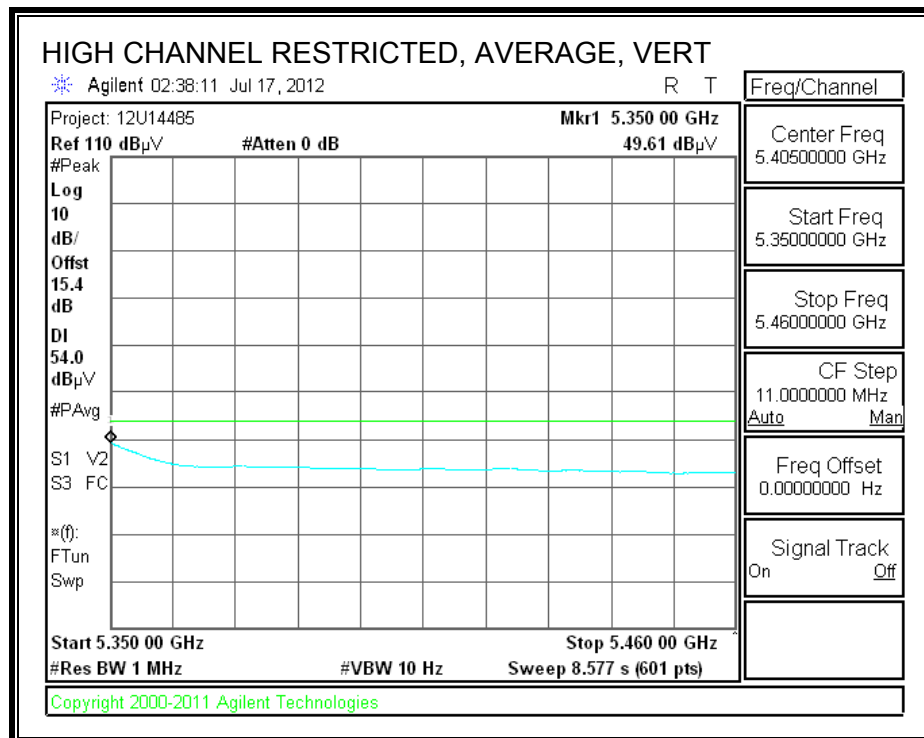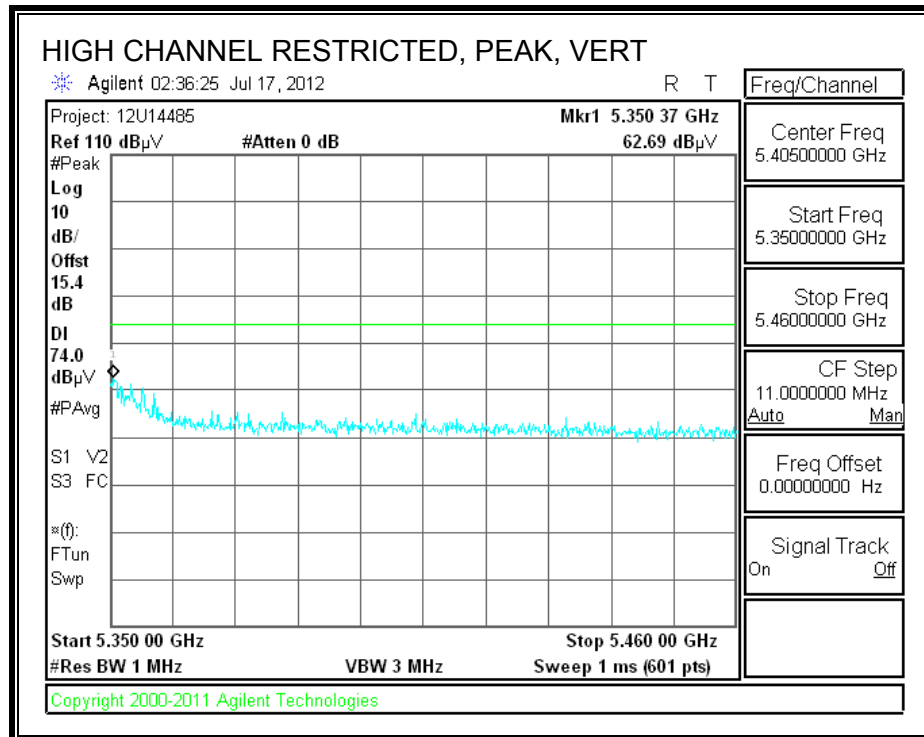

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement

Compliance Certification Services, Fremont 5m Chamber

Test Engr: Tom Chen
Date: 06/30/12
Project #: 12U14485
Company: Apple
Test Target: FCC Class B
Mode Oper: W53 802.11n HT40, TX mode

f Measurement Frequency Amp Preamp Gain Average Field Strength Limit
Dist Distance to Antenna D Corr Distance Correct to 3 meters Peak Field Strength Limit
Read Analyzer Reading Avg Average Field Strength @ 3 m Margin vs. Average Limit
AF Antenna Factor Peak Calculated Peak Field Strength Margin vs. Peak Limit
CL Cable Loss HPF High Pass Filter


f GHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Notes
5270MHz HT40													
15.810	3.0	35.4	38.2	12.3	-32.2	0.0	0.7	54.4	74.0	-19.6	V	P	
15.810	3.0	22.3	38.2	12.3	-32.2	0.0	0.7	41.3	54.0	-12.7	V	A	
15.810	3.0	35.2	38.2	12.3	-32.2	0.0	0.7	54.2	74.0	-19.8	H	P	
15.810	3.0	22.3	38.2	12.3	-32.2	0.0	0.7	41.3	54.0	-12.7	H	A	
5310MHz HT40													
15.930	3.0	35.9	37.8	12.4	-32.2	0.0	0.7	54.7	74.0	-19.3	H	P	
15.930	3.0	22.3	37.8	12.4	-32.2	0.0	0.7	41.0	54.0	-13.0	H	A	
15.930	3.0	36.1	37.8	12.4	-32.2	0.0	0.7	54.9	74.0	-19.1	V	P	
15.930	3.0	22.3	37.8	12.4	-32.2	0.0	0.7	41.1	54.0	-12.9	V	A	


Rev. 4.1.2.7



Note: No other emissions were detected above the system noise floor.

9.2.7. TX ABOVE 1 GHz 802.11a MODE IN THE 5.6 GHz BAND



RESTRICTED & AUTHORIZED BANDEDGE (LOW CHANNEL)

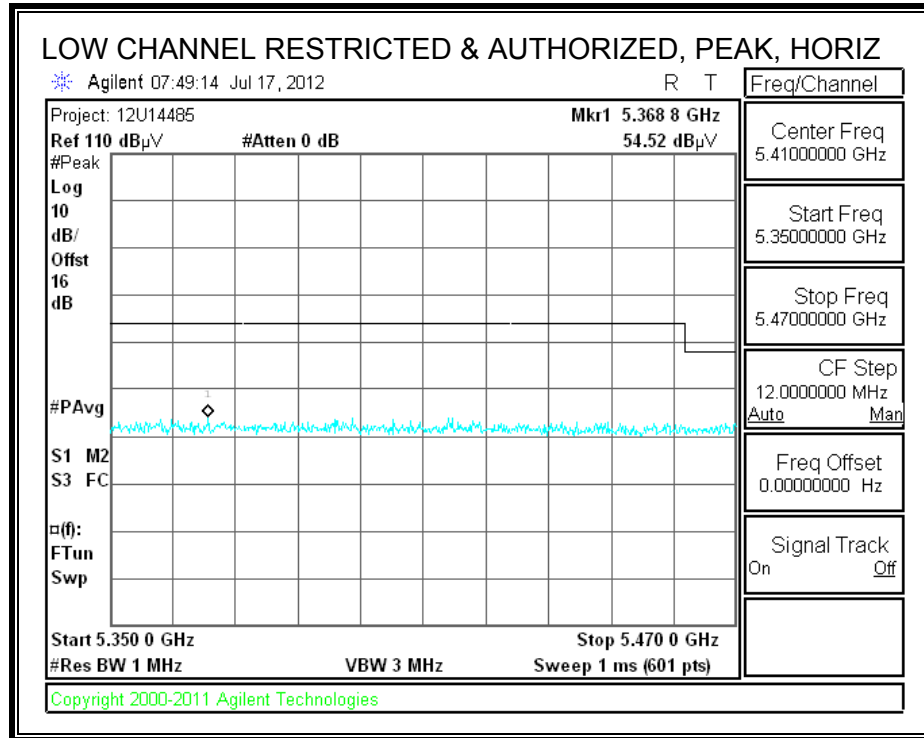

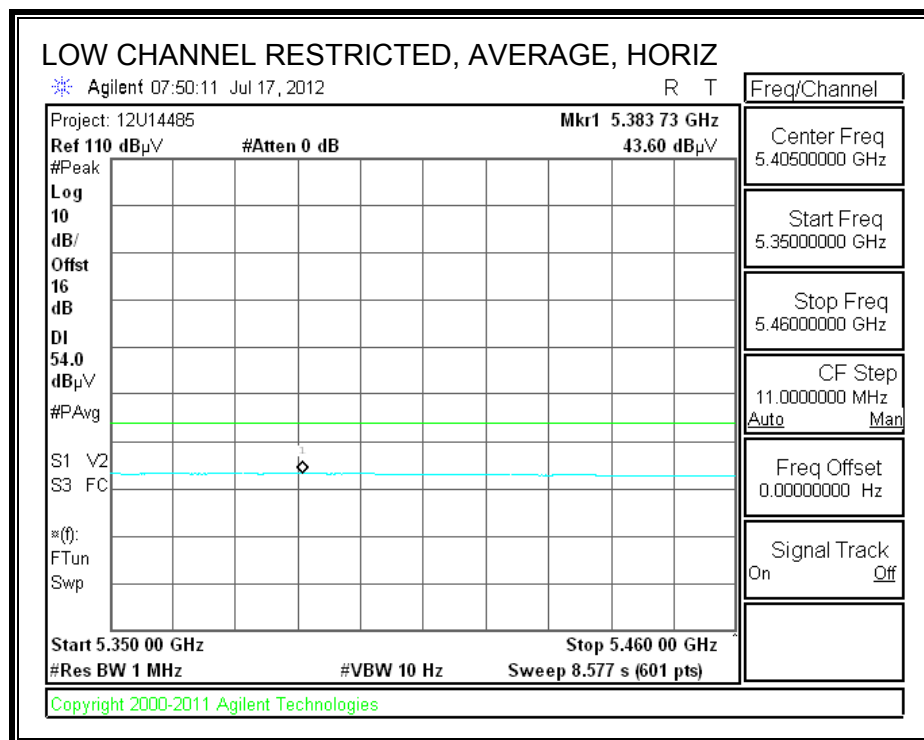

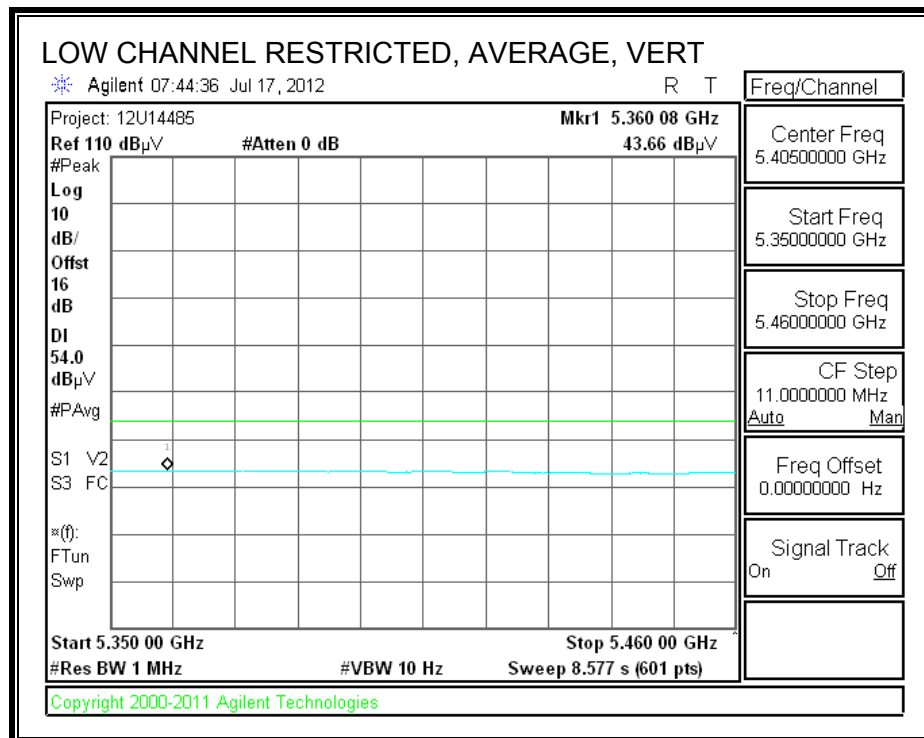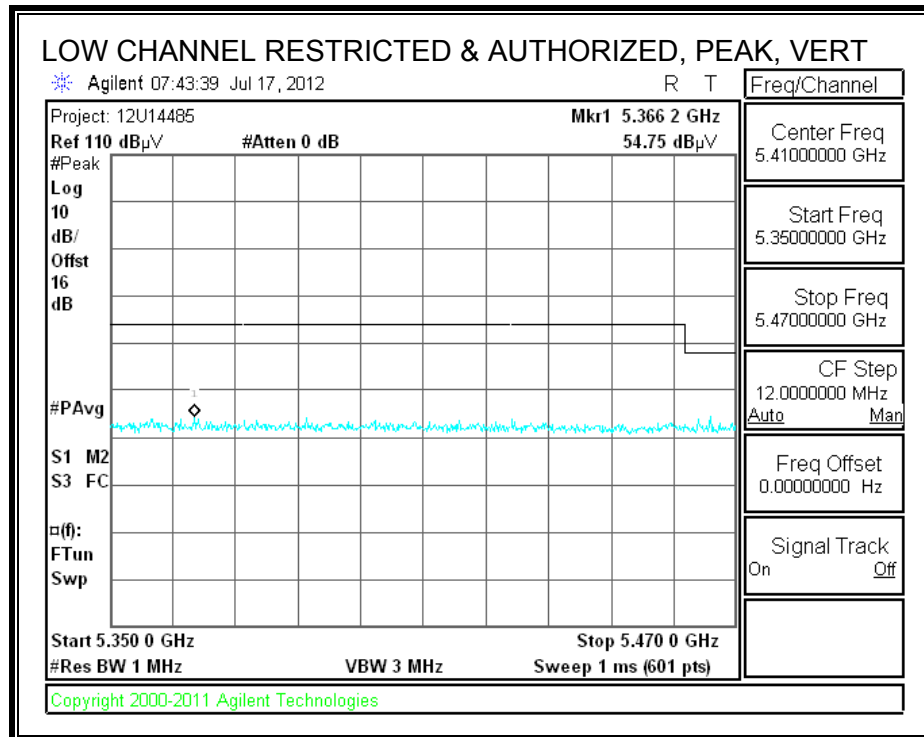

AUTHORIZED BANDEDGE (HIGH CHANNEL)

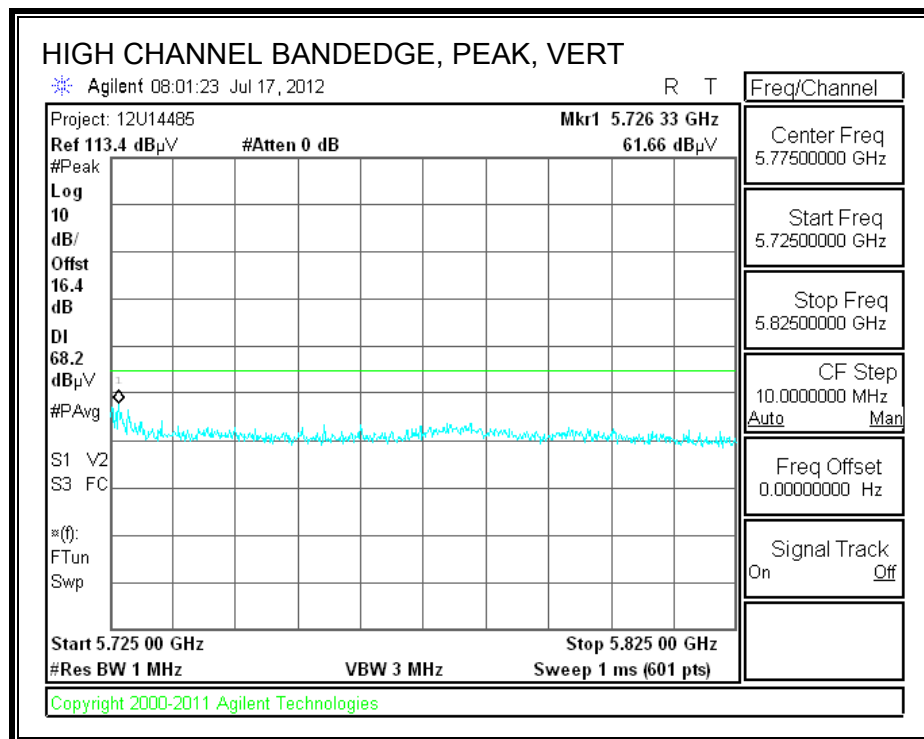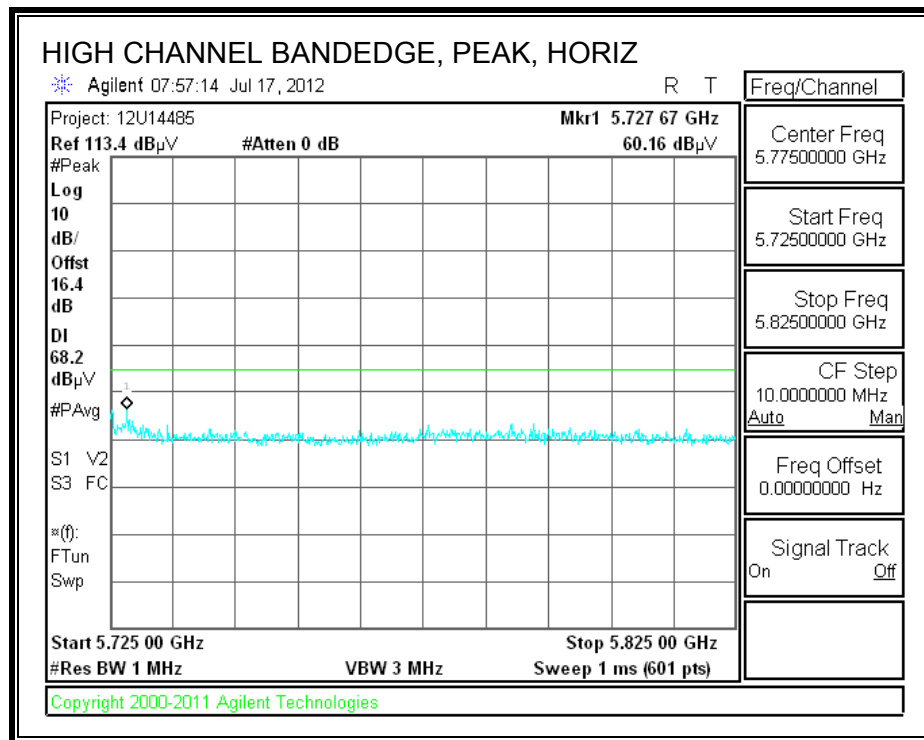

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber

Test Engr: Tom Chen
Date: 06/30/12
Project #: 12U14485
Company: Apple
Test Target: FCC Class B
Mode Oper: W56 802.11a, TX mode

f Measurement Frequency Amp Preamp Gain Average Field Strength Limit
Dist Distance to Antenna D Corr Distance Correct to 3 meters Peak Field Strength Limit
Read Analyzer Reading Avg Average Field Strength @ 3 m Margin vs. Average Limit
AF Antenna Factor Peak Calculated Peak Field Strength Margin vs. Peak Limit
CL Cable Loss HPF High Pass Filter


f GHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Notes
5500MHz 11a													
11.000	3.0	35.7	38.3	10.2	-33.5	0.0	0.7	51.5	74.0	-22.5	V	P	
11.000	3.0	22.7	38.3	10.2	-33.5	0.0	0.7	38.5	54.0	-15.5	V	A	
11.000	3.0	35.8	38.3	10.2	-33.5	0.0	0.7	51.5	74.0	-22.5	H	P	
11.000	3.0	22.7	38.3	10.2	-33.5	0.0	0.7	38.5	54.0	-15.5	H	A	
5580MHz 11a													
11.160	3.0	35.5	38.5	10.3	-33.3	0.0	0.7	51.8	74.0	-22.2	H	P	
11.160	3.0	22.3	38.5	10.3	-33.3	0.0	0.7	38.6	54.0	-15.4	H	A	
11.160	3.0	34.7	38.5	10.3	-33.3	0.0	0.7	51.0	74.0	-23.0	V	P	
11.160	3.0	22.4	38.5	10.3	-33.3	0.0	0.7	38.6	54.0	-15.4	V	A	
5700MHz 11a													
11.400	3.0	35.6	38.7	10.6	-33.0	0.0	0.7	52.7	74.0	-21.3	V	P	
11.400	3.0	22.2	38.7	10.6	-33.0	0.0	0.7	39.3	54.0	-14.7	V	A	
11.400	3.0	34.8	38.7	10.6	-33.0	0.0	0.7	51.9	74.0	-22.1	H	P	
11.400	3.0	22.3	38.7	10.6	-33.0	0.0	0.7	39.3	54.0	-14.7	H	A	


Rev. 4.1.2.7



Note: No other emissions were detected above the system noise floor.

9.2.8. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.6 GHz BAND



RESTRICTED & AUTHORIZED BANDEDGE (LOW CHANNEL)

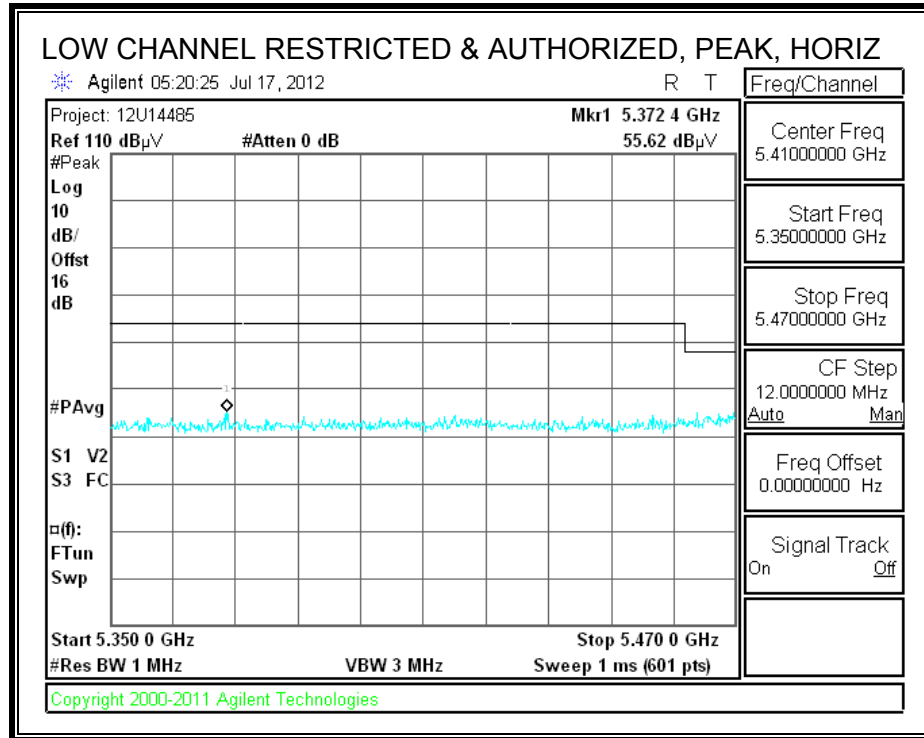

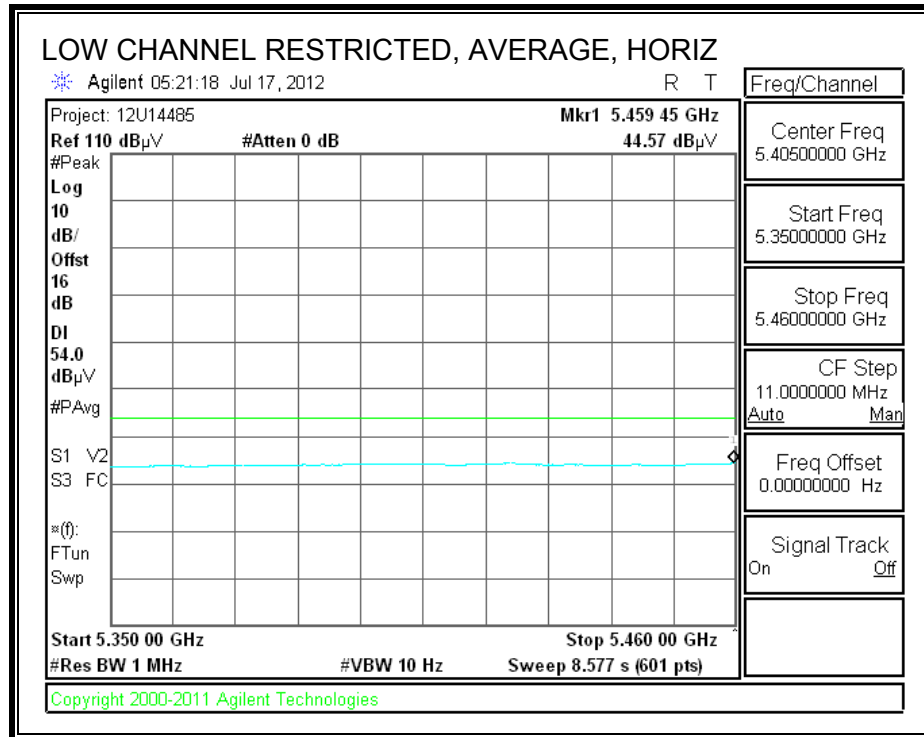

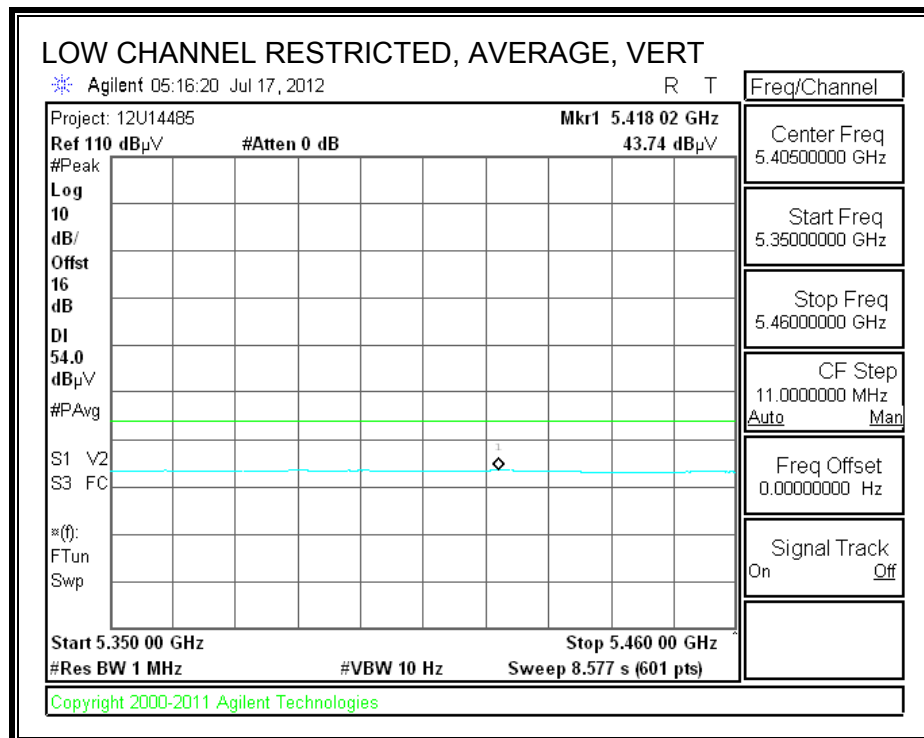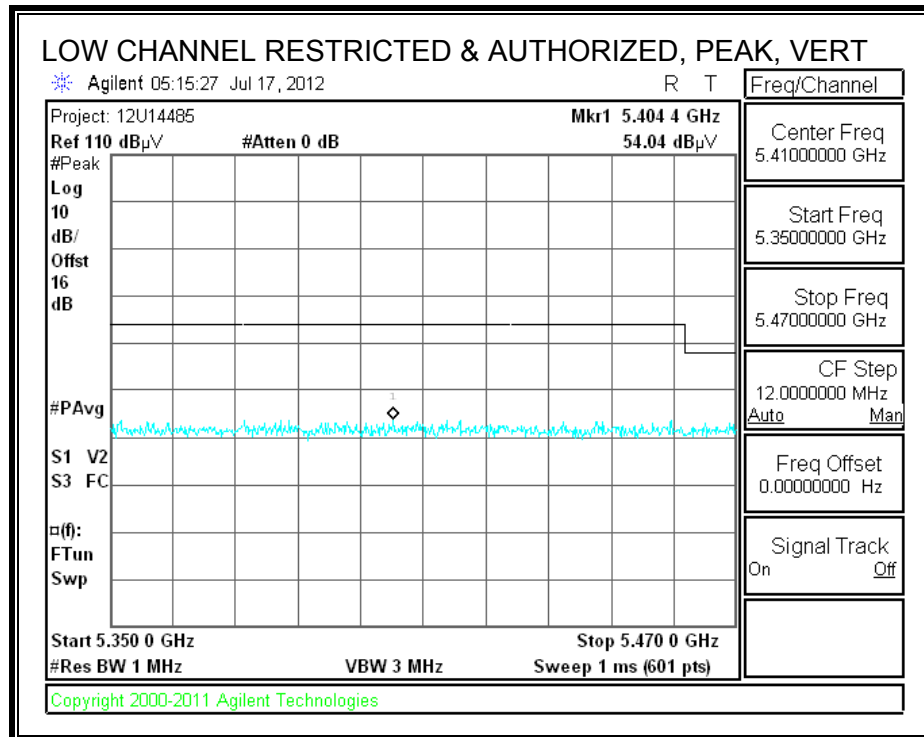

AUTHORIZED BANDEDGE (HIGH CHANNEL)

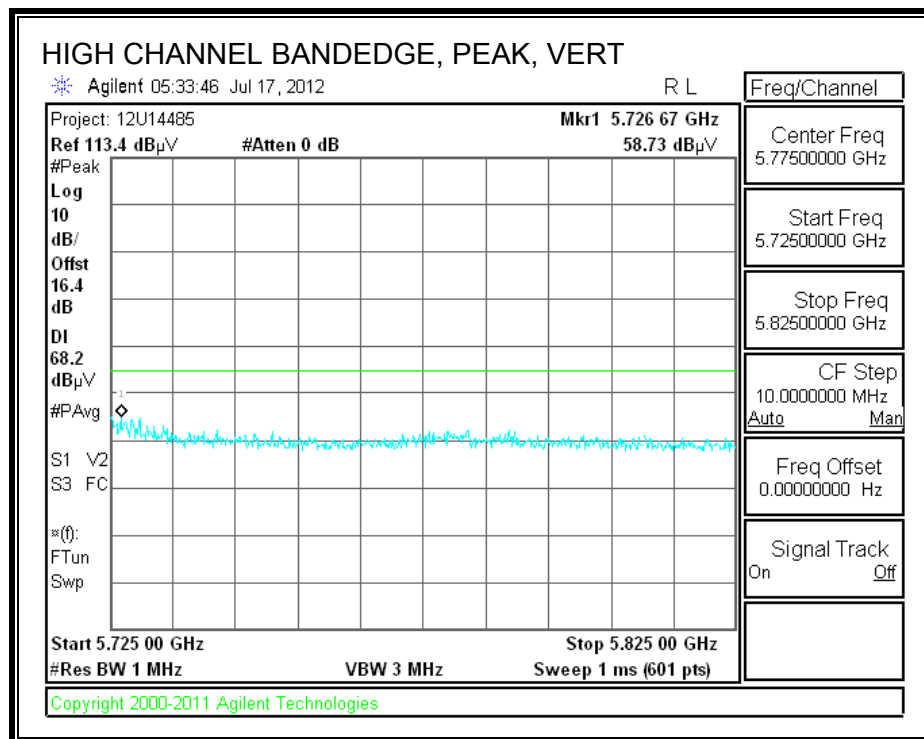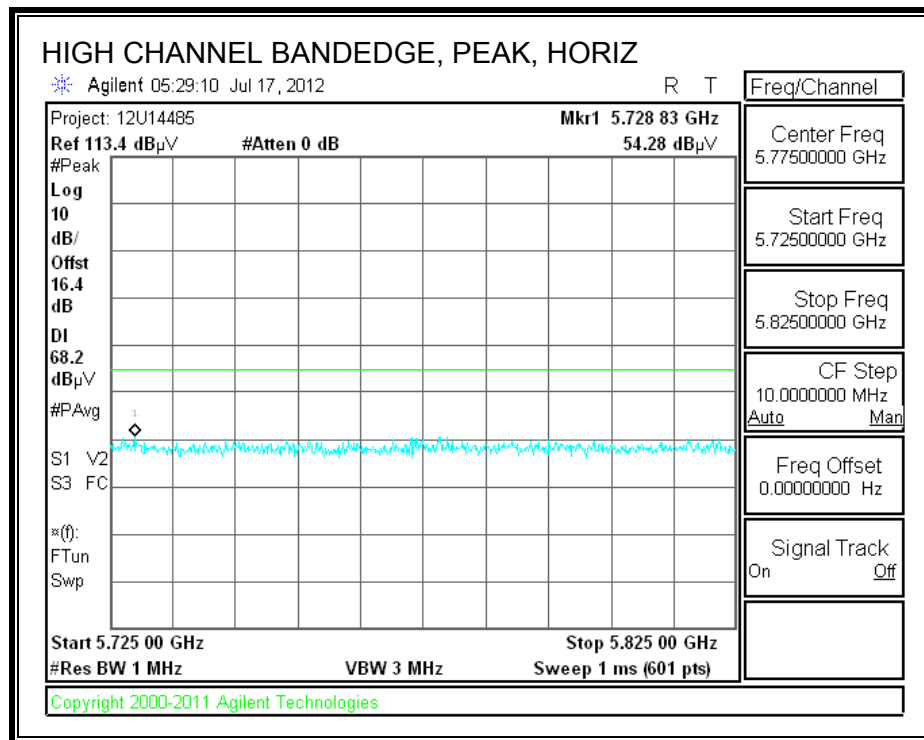

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber

Test Engr: Tom Chen
Date: 06/30/12
Project #: 12U14485
Company: Apple
Test Target: FCC Class B
Mode Oper: W56 802.11n, TX mode

f Measurement Frequency Amp Preamp Gain Average Field Strength Limit
Dist Distance to Antenna D Corr Distance Correct to 3 meters Peak Field Strength Limit
Read Analyzer Reading Avg Average Field Strength @ 3 m Margin vs. Average Limit
AF Antenna Factor Peak Calculated Peak Field Strength Margin vs. Peak Limit
CL Cable Loss HPF High Pass Filter


f GHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Notes
5500MHz 11n													
11.000	3.0	35.5	38.3	10.2	-33.5	0.0	0.7	51.3	74.0	-22.7	H	P	
11.000	3.0	22.7	38.3	10.2	-33.5	0.0	0.7	38.5	54.0	-15.5	H	A	
11.000	3.0	35.4	38.3	10.2	-33.5	0.0	0.7	51.1	74.0	-22.9	V	P	
11.000	3.0	22.7	38.3	10.2	-33.5	0.0	0.7	38.5	54.0	-15.5	V	A	
5580MHz 11n													
11.160	3.0	35.4	38.5	10.3	-33.3	0.0	0.7	51.7	74.0	-22.3	V	P	
11.160	3.0	22.3	38.5	10.3	-33.3	0.0	0.7	38.6	54.0	-15.4	V	A	
11.160	3.0	34.8	38.5	10.3	-33.3	0.0	0.7	51.0	74.0	-23.0	H	P	
11.160	3.0	22.3	38.5	10.3	-33.3	0.0	0.7	38.6	54.0	-15.4	H	A	
5700MHz 11n													
11.400	3.0	35.5	38.7	10.6	-33.0	0.0	0.7	52.5	74.0	-21.5	H	P	
11.400	3.0	22.1	38.7	10.6	-33.0	0.0	0.7	39.2	54.0	-14.8	H	A	
11.400	3.0	34.7	38.7	10.6	-33.0	0.0	0.7	51.8	74.0	-22.2	V	P	
11.400	3.0	22.1	38.7	10.6	-33.0	0.0	0.7	39.2	54.0	-14.8	V	A	


Rev. 4.1.2.7



Note: No other emissions were detected above the system noise floor.

9.2.9. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.6 GHz BAND



RESTRICTED & AUTHORIZED BANDEDGE (LOW CHANNEL)

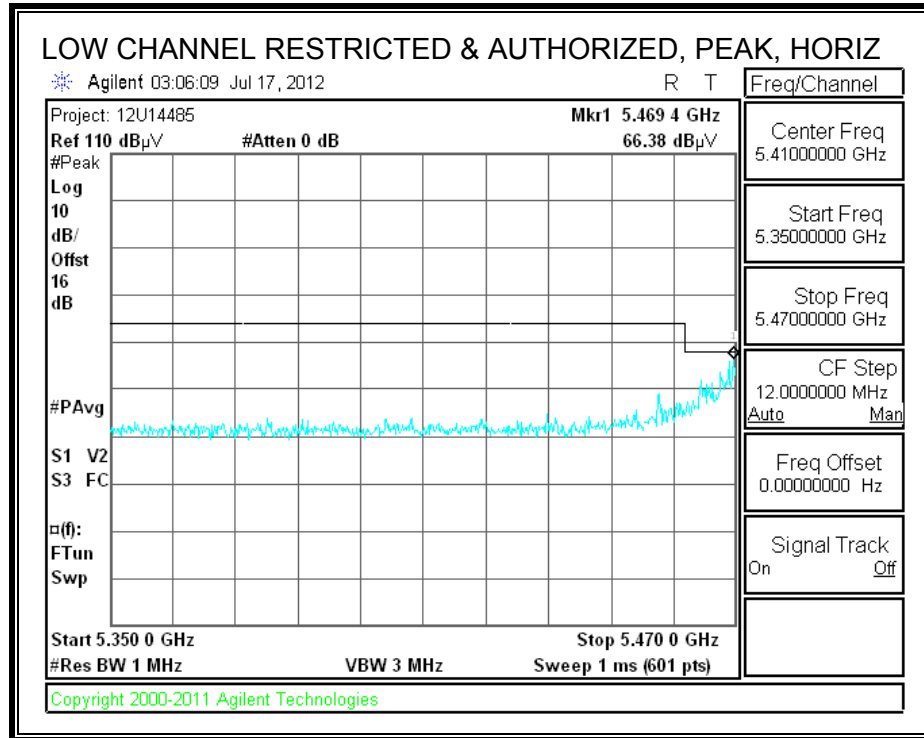

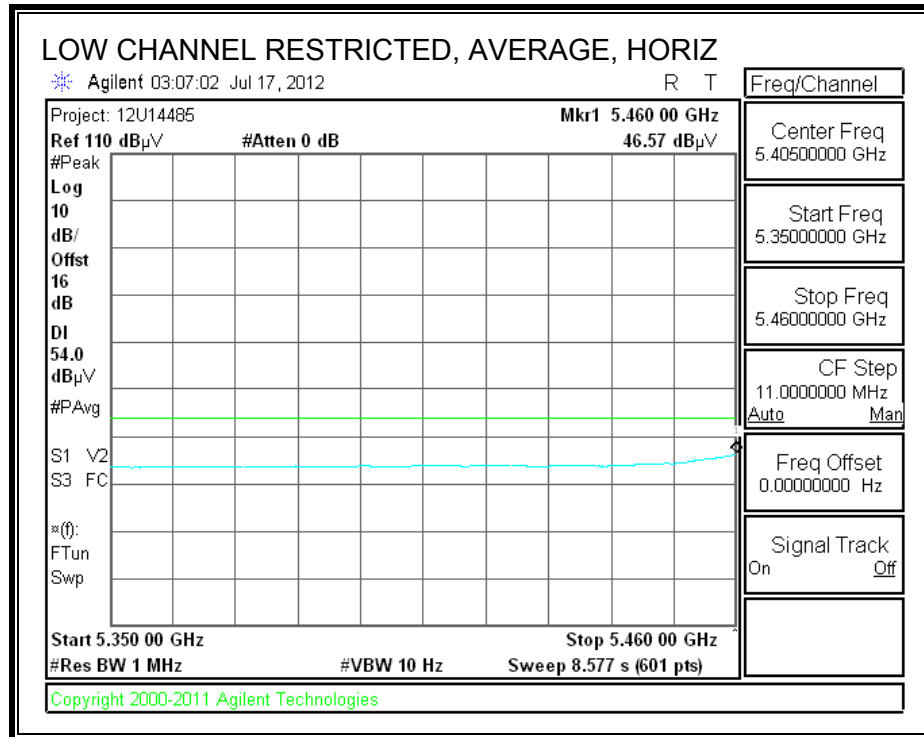

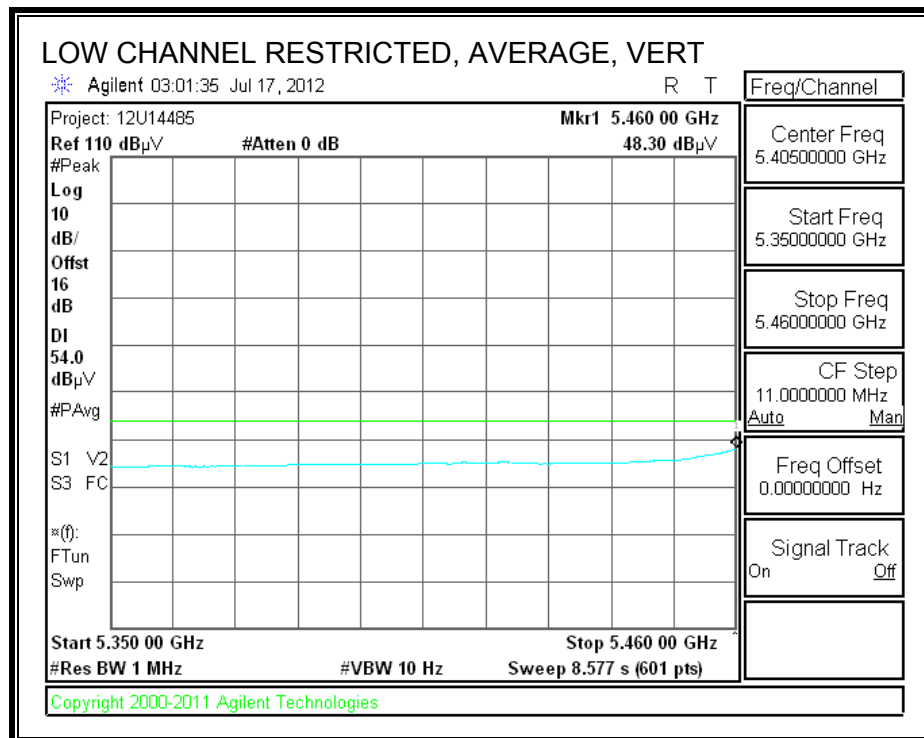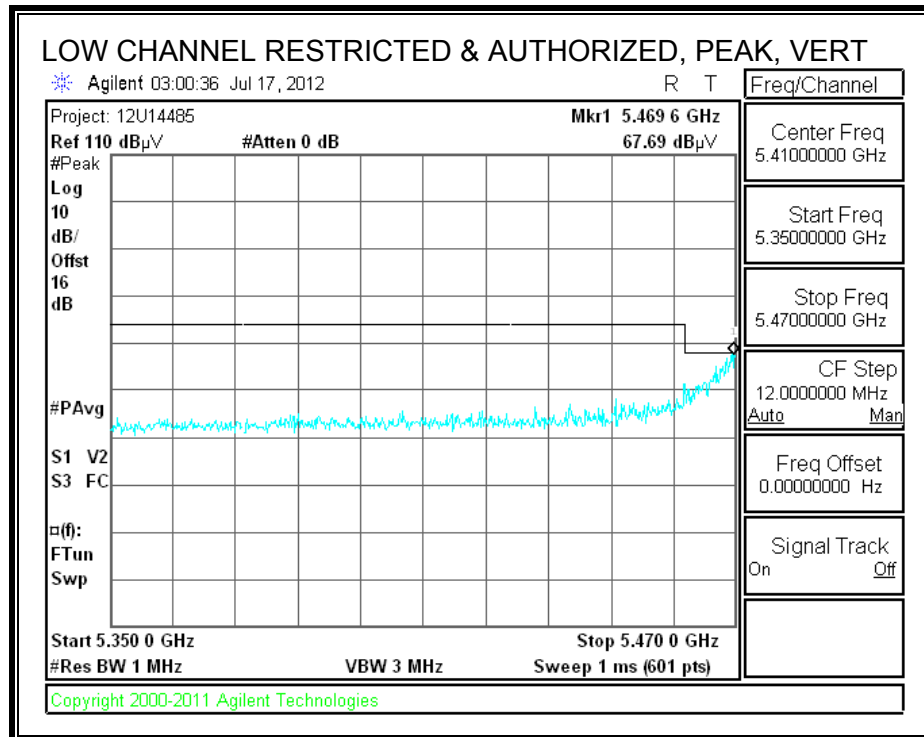

AUTHORIZED BANDEDGE (HIGH CHANNEL)

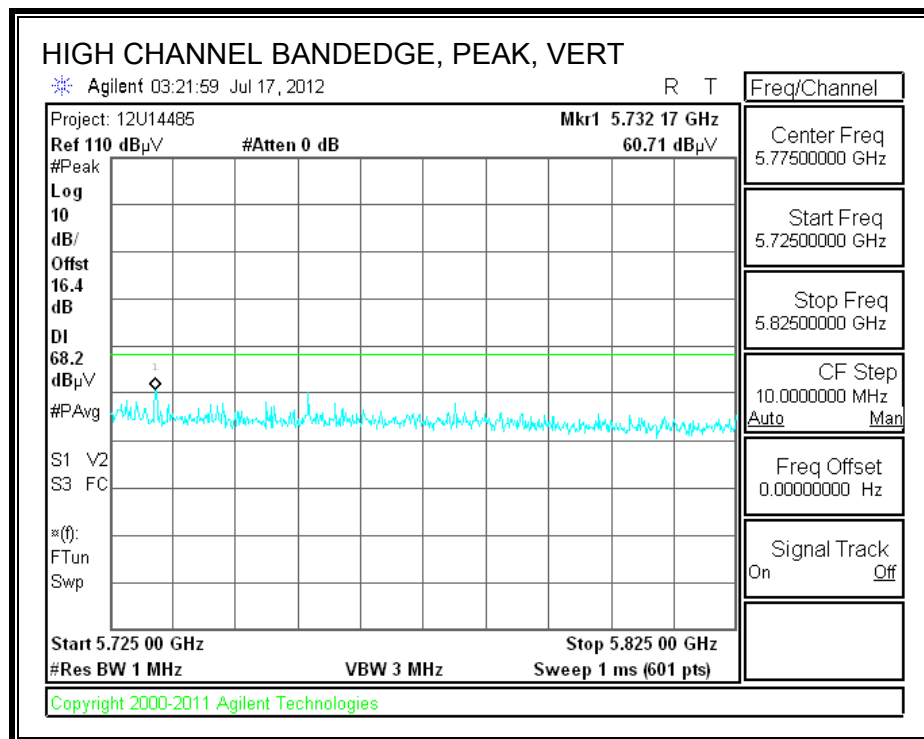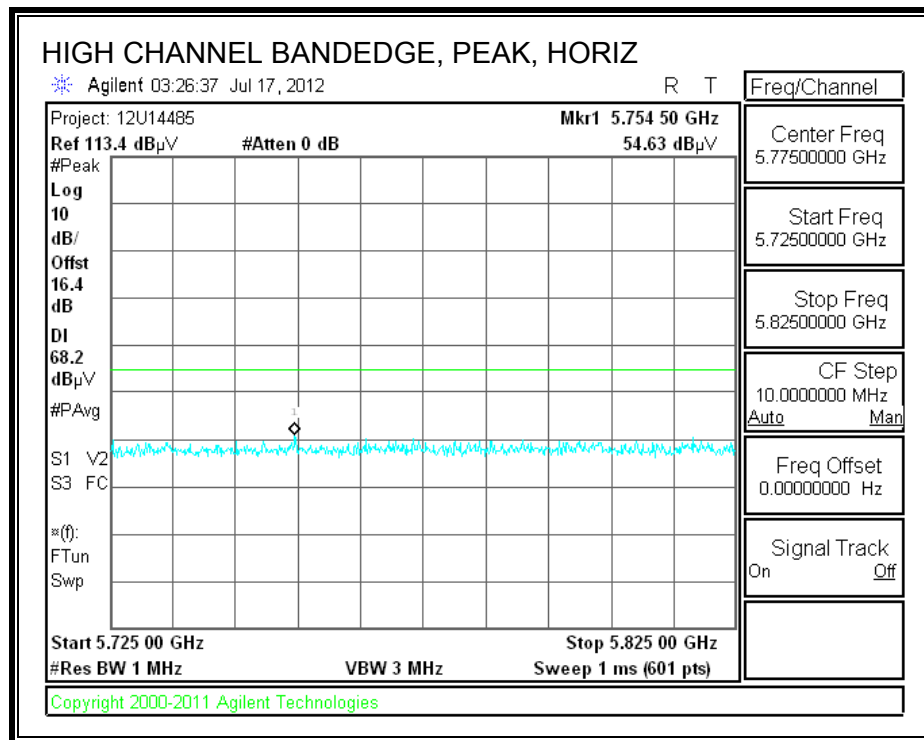

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber

Test Engr: Tom Chen
Date: 06/30/12
Project #: 12U14485
Company: Apple
Test Target: FCC Class B
Mode Oper: W56 802.11n HT40, TX mode

f	Measurement Frequency	Amp	Preamp Gain	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter	



f GHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Notes
5510MHz HT40													
11.020	3.0	36.2	38.3	10.2	-33.4	0.0	0.7	52.0	74.0	-22.0	V	P	
11.020	3.0	22.7	38.3	10.2	-33.4	0.0	0.7	38.5	54.0	-15.5	V	A	
11.020	3.0	35.9	38.3	10.2	-33.4	0.0	0.7	51.7	74.0	-22.3	H	P	
11.020	3.0	22.7	38.3	10.2	-33.4	0.0	0.7	38.6	54.0	-15.4	H	A	
5550MHz HT40													
11.100	3.0	35.8	38.4	10.3	-33.3	0.0	0.7	51.9	74.0	-22.1	H	P	
11.100	3.0	22.6	38.4	10.3	-33.3	0.0	0.7	38.7	54.0	-15.3	H	A	
11.100	3.0	34.9	38.4	10.3	-33.3	0.0	0.7	51.0	74.0	-23.0	V	P	
11.100	3.0	22.5	38.4	10.3	-33.3	0.0	0.7	38.6	54.0	-15.4	V	A	
5670MHz HT40													
11.340	3.0	34.3	38.7	10.6	-33.0	0.0	0.7	51.2	74.0	-22.8	V	P	
11.340	3.0	21.6	38.7	10.6	-33.0	0.0	0.7	38.4	54.0	-15.6	V	A	
11.340	3.0	34.6	38.7	10.6	-33.0	0.0	0.7	51.5	74.0	-22.5	H	P	
11.340	3.0	21.5	38.7	10.6	-33.0	0.0	0.7	38.4	54.0	-15.6	H	A	



Rev. 4.1.2.7

Note: No other emissions were detected above the system noise floor.

9.2.10. 2.4GHZ AND 5GHZ BAND CO-LOCATION

BANDEDGE (CHANNEL 36 and Bluetooth High CHANNEL)

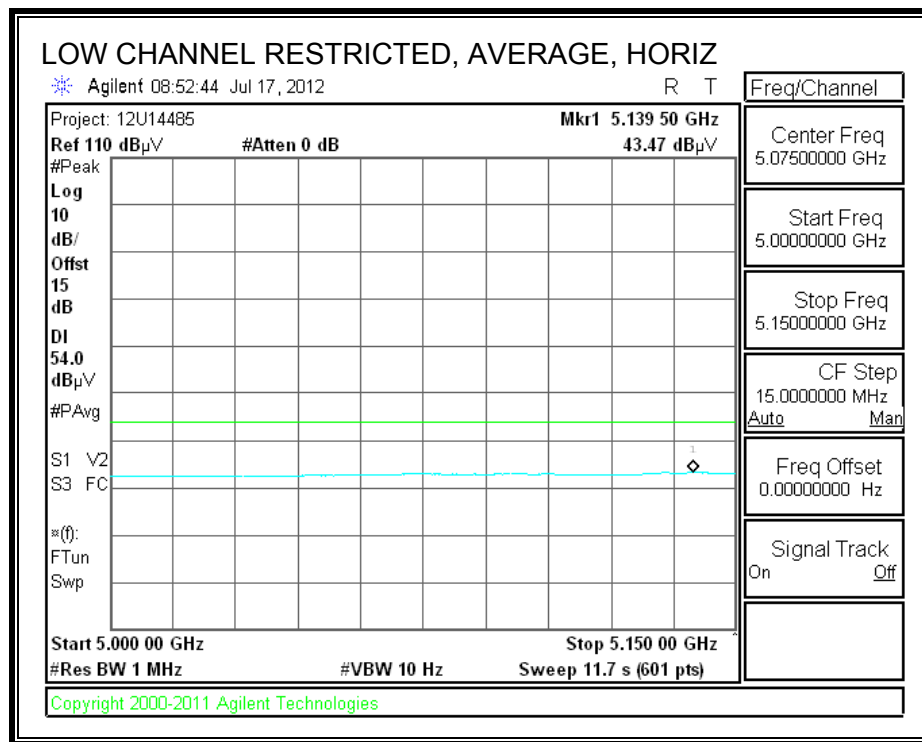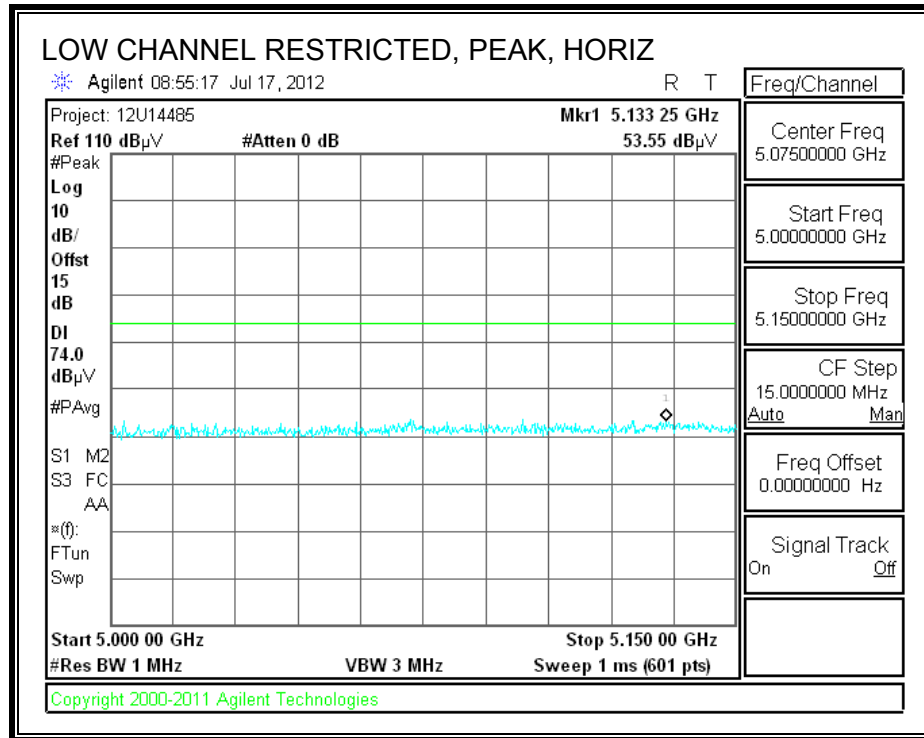

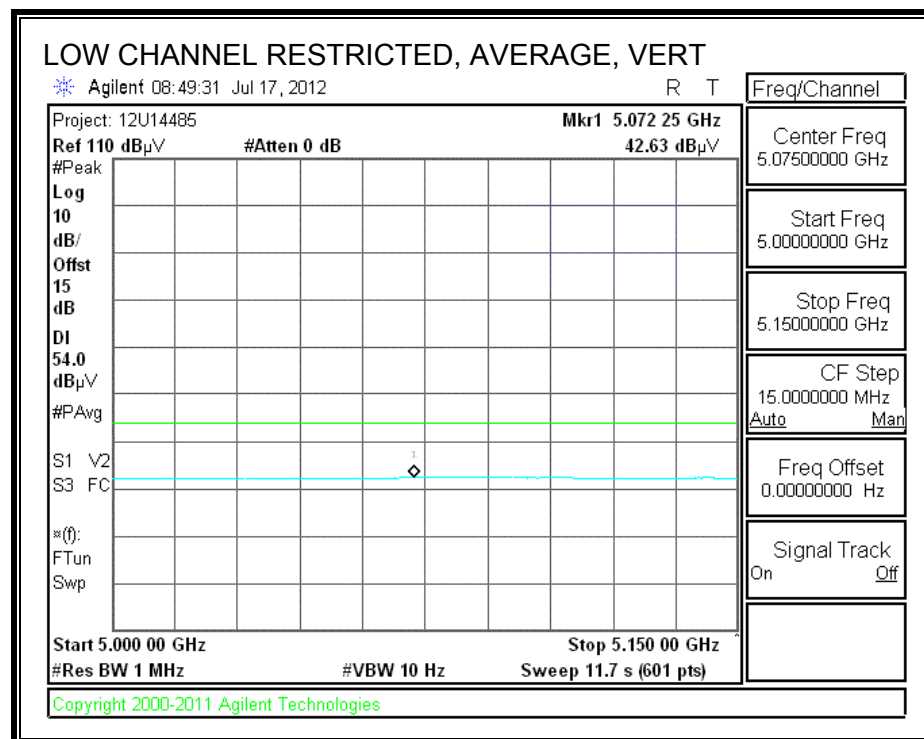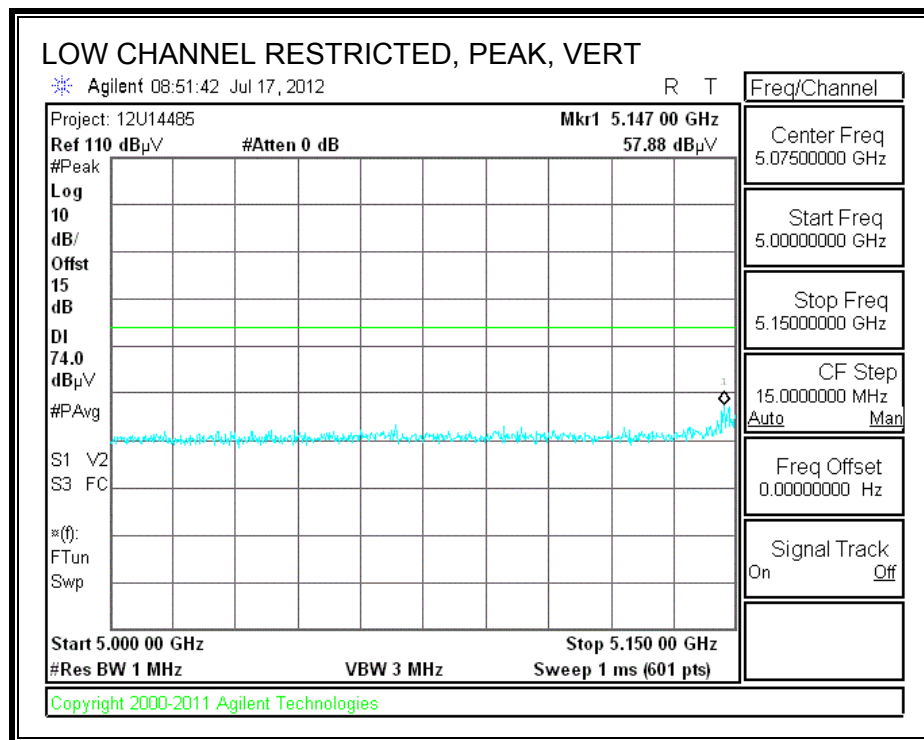

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement

Compliance Certification Services, Fremont 5m Chamber

Test Engr: Tom Chen
Date: 08/06/12
Project #: 12U14485
Company: Apple Inc.
Test Target: FCC Class B
Mode Oper: Bluetooth TX on, UNII band CH36 TX on

f Measurement Frequency Amp Preamp Gain Average Field Strength Limit
Dist Distance to Antenna D Corr Distance Correct to 3 meters Peak Field Strength Limit
Read Analyzer Reading Avg Average Field Strength @ 3 m Margin vs. Average Limit
AF Antenna Factor Peak Calculated Peak Field Strength Margin vs. Peak Limit
CL Cable Loss HPF High Pass Filter


f GHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Notes
5180MHz													
10.360	3.0	38.3	38.2	9.4	-35.8	0.0	0.0	50.1	74.0	-23.9	V	P	
10.360	3.0	24.5	38.2	9.4	-35.8	0.0	0.0	36.3	54.0	-17.7	V	A	
10.360	3.0	34.9	38.0	9.4	-35.8	0.0	0.0	46.6	74.0	-27.4	H	P	
10.360	3.0	22.0	38.0	9.4	-35.8	0.0	0.0	33.6	54.0	-20.4	H	A	
2480 MHz													
4.960	3.0	55.0	33.2	6.4	-35.5	0.0	0.0	59.1	74.0	-14.9	V	P	
4.960	3.0	44.0	33.2	6.4	-35.5	0.0	0.0	48.1	54.0	-5.9	V	A	
4.960	3.0	45.8	33.2	6.3	-34.8	0.0	0.0	50.5	74.0	-23.5	H	P	
4.960	3.0	34.0	33.2	6.3	-34.8	0.0	0.0	38.7	54.0	-15.3	H	A	

Rev. 4.1.2.7

Note: No other emissions were detected above the system noise floor.


9.3. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

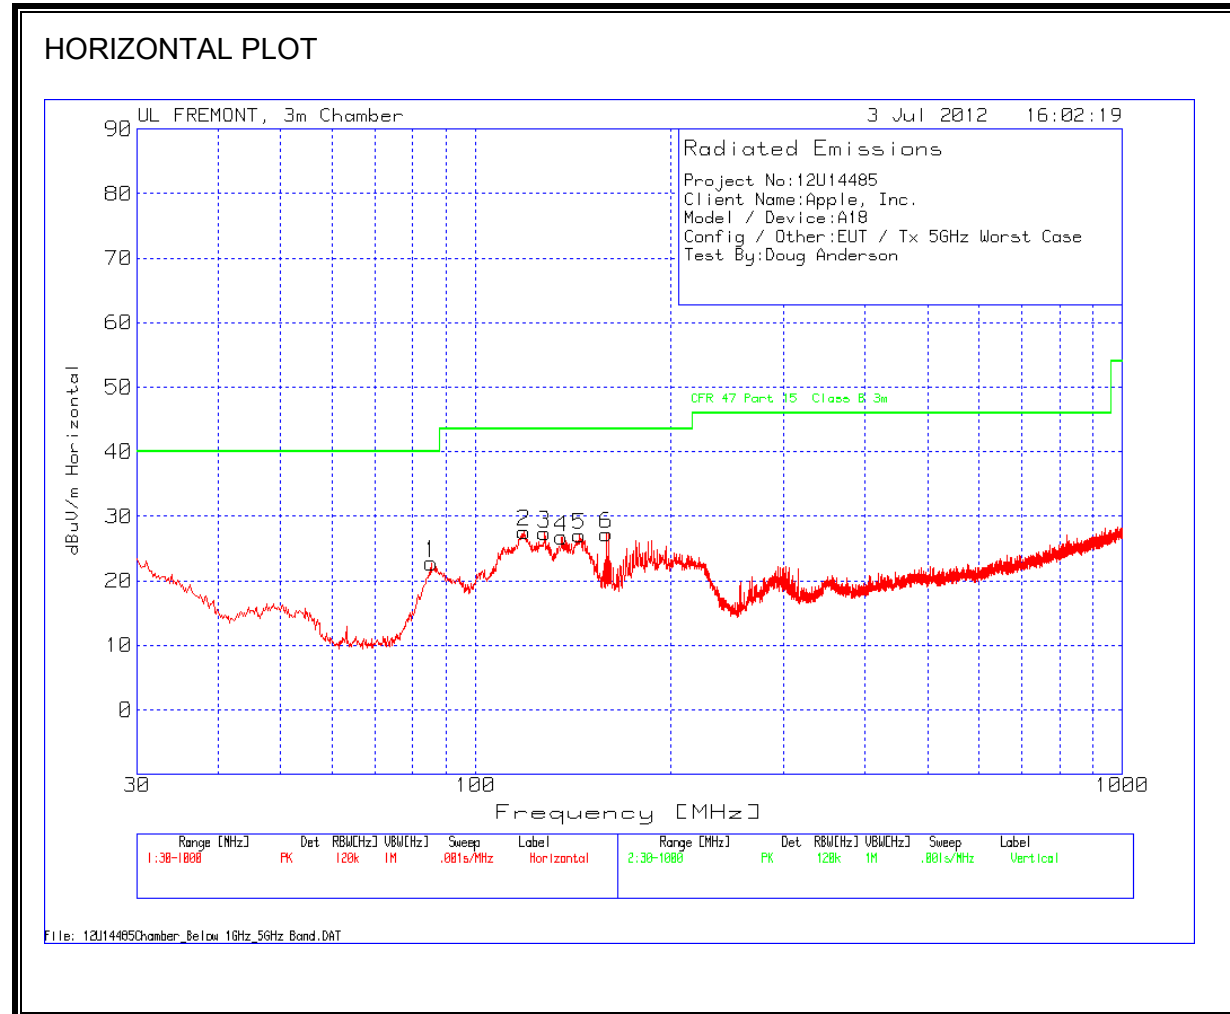

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

VERTICAL PLOT

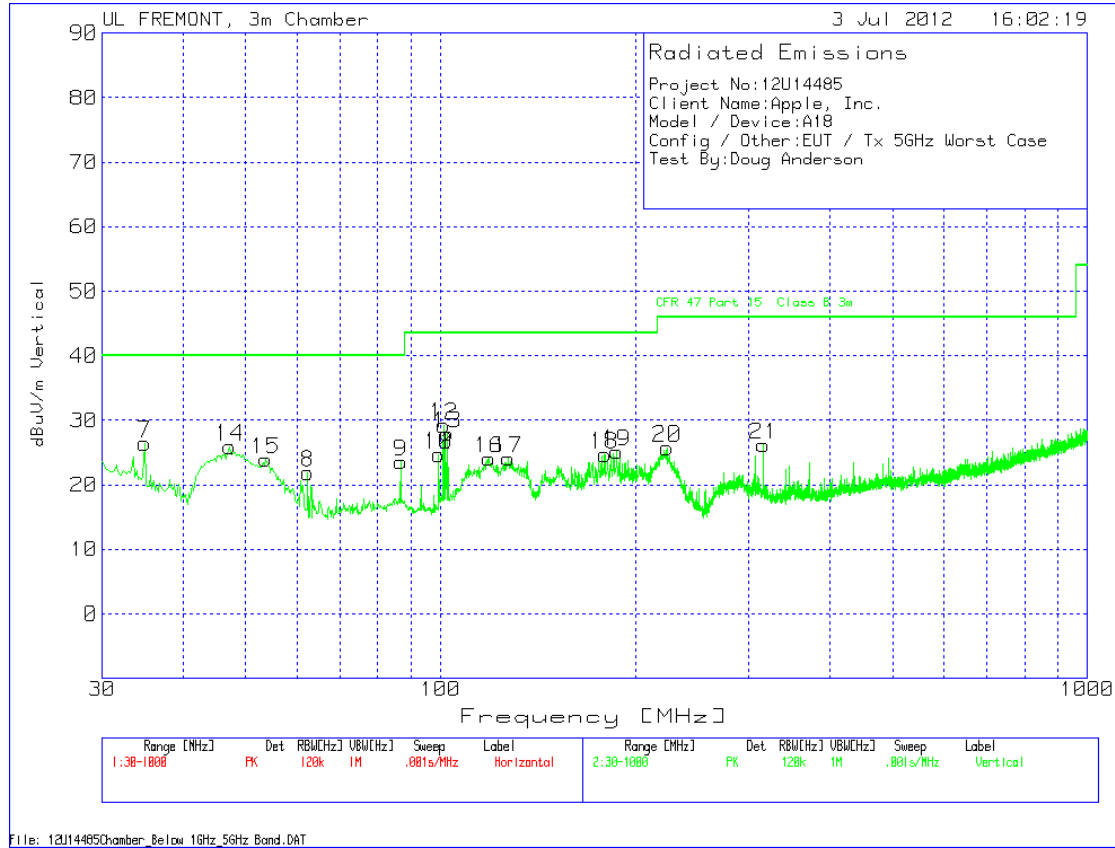

HORIZONTAL AND VERTICAL DATA

Project No: 12U14485
Client Name: Apple, Inc.
Model / Device: A18
Config / Other: EUT / Tx 5GHz Band Worst Case
Test By: Doug Anderson

Range 1 30 - 1000MHz

Test Freq. MHz	Meter Reading dB(μV/m)	Detector	Chamber Pre-Amp Gain [dB] + Cable Loss dB	3m Chamber Antenna Factor (dB)	Corrected Reading dB(μV/m)	FCC Class B 3m Limit dB(μV/m)	Margin dB	Height cm	Polarity V/H
85.4396	42.37	PK	-27	7.4	22.77	40	-17.23	400	Horz
118.9748	40.48	PK	-26.6	13.7	27.58	43.5	-15.92	400	Horz
127.8917	39.97	PK	-26.5	13.9	27.37	43.5	-16.13	400	Horz
135.8393	39.86	PK	-26.5	13.4	26.76	43.5	-16.74	300	Horz
144.95	40.77	PK	-26.4	12.7	27.07	43.5	-16.43	300	Horz
159.2946	41.38	PK	-26.2	12.1	27.28	43.5	-16.22	100	Horz

Range 2 30 - 1000MHz

Test Freq. MHz	Meter Reading dB(μV/m)	Detector	Chamber Pre-Amp Gain [dB] + Cable Loss dB	3m Chamber Antenna Factor (dB)	Corrected Reading dB(μV/m)	FCC Class B 3m Limit dB(μV/m)	Margin dB	Height cm	Polarity V/H
Turntable Transient Emissions: Not EUT Related									
34.8461	36.42	PK	-27.5	17.5	26.42	40	-13.58	100	Vert
62.3721	41.62	PK	-27.2	7.5	21.92	40	-18.08	400	Vert
86.7966	43.13	PK	-27	7.4	23.53	40	-16.47	100	Vert
99.3965	41.78	PK	-26.8	9.7	24.68	43.5	-18.82	100	Vert
99.3965	41.78	PK	-26.8	9.7	24.68	43.5	-18.82	100	Vert
101.1411	45.72	PK	-26.8	10.3	29.22	43.5	-14.28	200	Vert
102.498	44.08	PK	-26.8	10.7	27.98	43.5	-15.52	100	Vert

EUT Related Emissions

47.2522	44.14	PK	-27.3	9.1	25.94	40	-14.06	100	Vert
53.6491	44.16	PK	-27.3	7.1	23.96	40	-16.04	100	Vert
118.781	36.98	PK	-26.6	13.7	24.08	43.5	-19.42	100	Vert
127.504	36.68	PK	-26.5	13.9	24.08	43.5	-19.42	100	Vert
179.4544	39.82	PK	-26	10.9	24.72	43.5	-18.78	100	Vert
187.2082	40.1	PK	-25.9	10.9	25.1	43.5	-18.4	100	Vert
224.0388	40.44	PK	-25.6	10.9	25.74	46	-20.26	100	Vert
315.9213	37.71	PK	-25.2	13.7	26.21	46	-19.79	100	Vert

PK - Peak detector

QP - Quasi-Peak detector

10. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.


Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS


6 WORST EMISSIONS

Project No:12U14485									
Client Name:Apple Inc.									
Model/Device:WLAN worst case									
Test Volt/Freq:120 VAC / 60Hz									
Test By:Tom Chen									
Line-L1 .15 - 30MHz									
Test Frequency	Meter Reading	Detector	T24 IL L1.TXT (dB)	LC Cables 1&3.TXT (dB)	dB(uVolts)	CFR 47 Part 15 Class B QP	Margin	CFR 47 Part 15 Class B Avg	Margin
0.3075	48.01	PK	0.1	0	48.11	60	-11.89	-	-
0.3075	42.48	Av	0.1	0	42.58	-	-	50	-7.42
0.618	49.3	PK	0.1	0	49.4	56	-6.6	-	-
0.618	43.56	Av	0.1	0	43.66	-	-	46	-2.34
0.9285	48.38	PK	0.1	0	48.48	56	-7.52	-	-
0.9285	42.63	Av	0.1	0	42.73	-	-	46	-3.27
1.239	43.26	PK	0.1	0	43.36	56	-12.64	-	-
1.239	37.36	Av	0.1	0	37.46	-	-	46	-8.54
Line-L2 .15 - 30MHz									
Test Frequency	Meter Reading	Detector	T24 IL L2.TXT (dB)	LC Cables 2&3.TXT (dB)	dB(uVolts)	CFR 47 Part 15 Class B QP	Margin	CFR 47 Part 15 Class B Avg	Margin
0.3075	40.93	PK	0.1	0	41.03	60	-18.97	-	-
0.3075	34.65	Av	0.1	0	34.75	-	-	50	-15.25
0.618	39.67	PK	0.1	0	39.77	56	-16.23	-	-
0.618	35.25	Av	0.1	0	35.35	-	-	46	-10.65
0.9285	38.83	PK	0.1	0	38.93	56	-17.07	-	-
0.9285	34.41	Av	0.1	0	34.51	-	-	46	-11.49
1.239	34.3	PK	0.1	0.1	34.5	56	-21.5	-	-
1.239	29.39	Av	0.1	0.1	29.59	-	-	46	-16.41

LINE 1 RESULTS

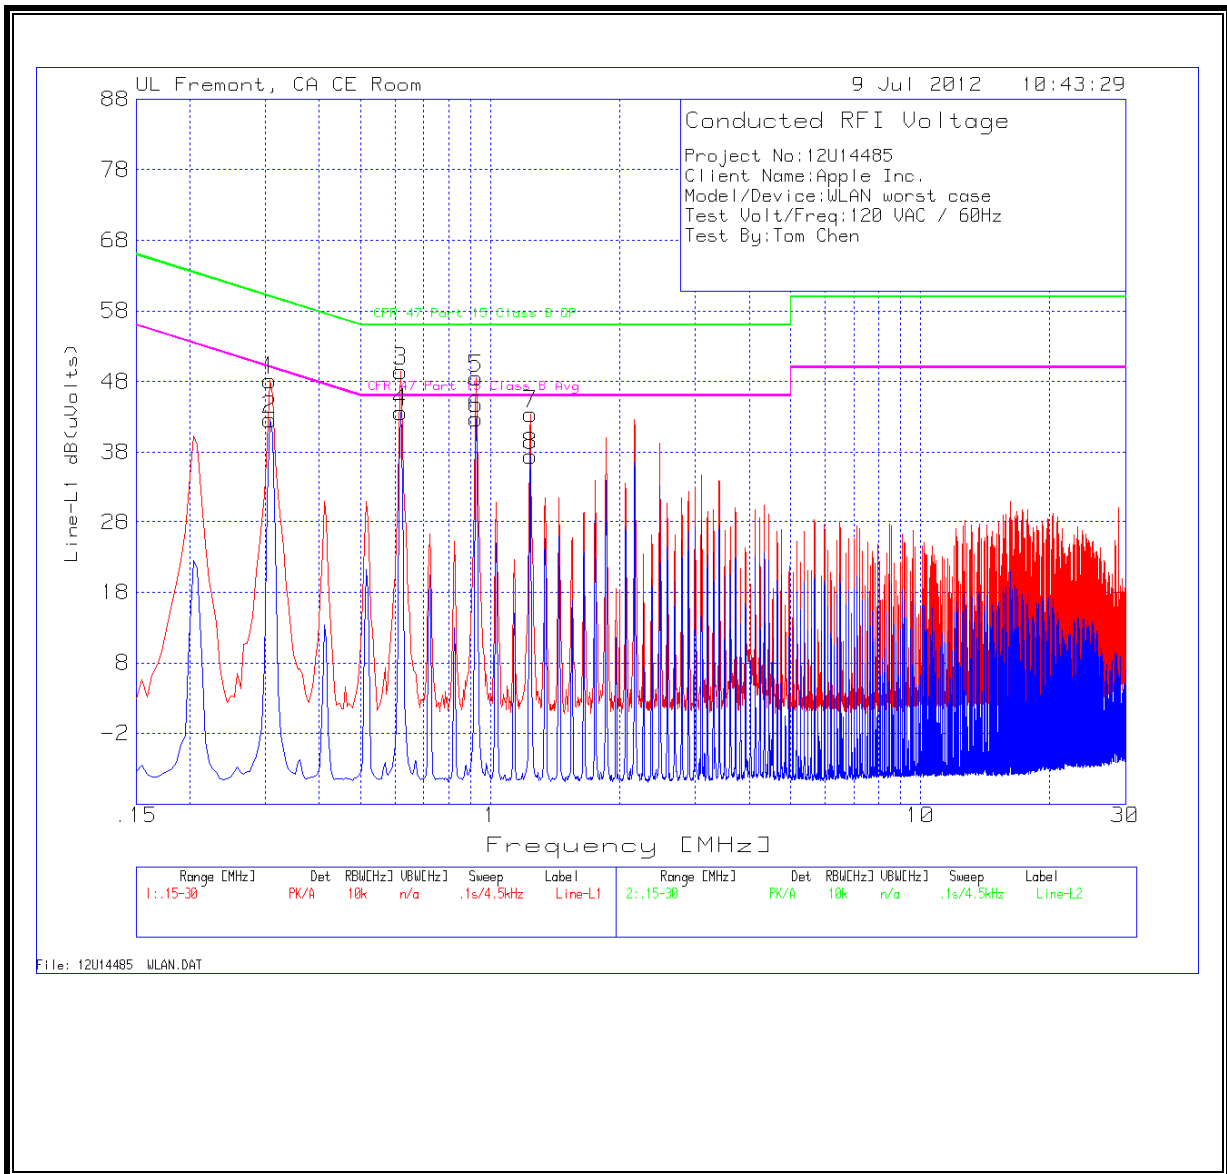

LINE 2 RESULTS

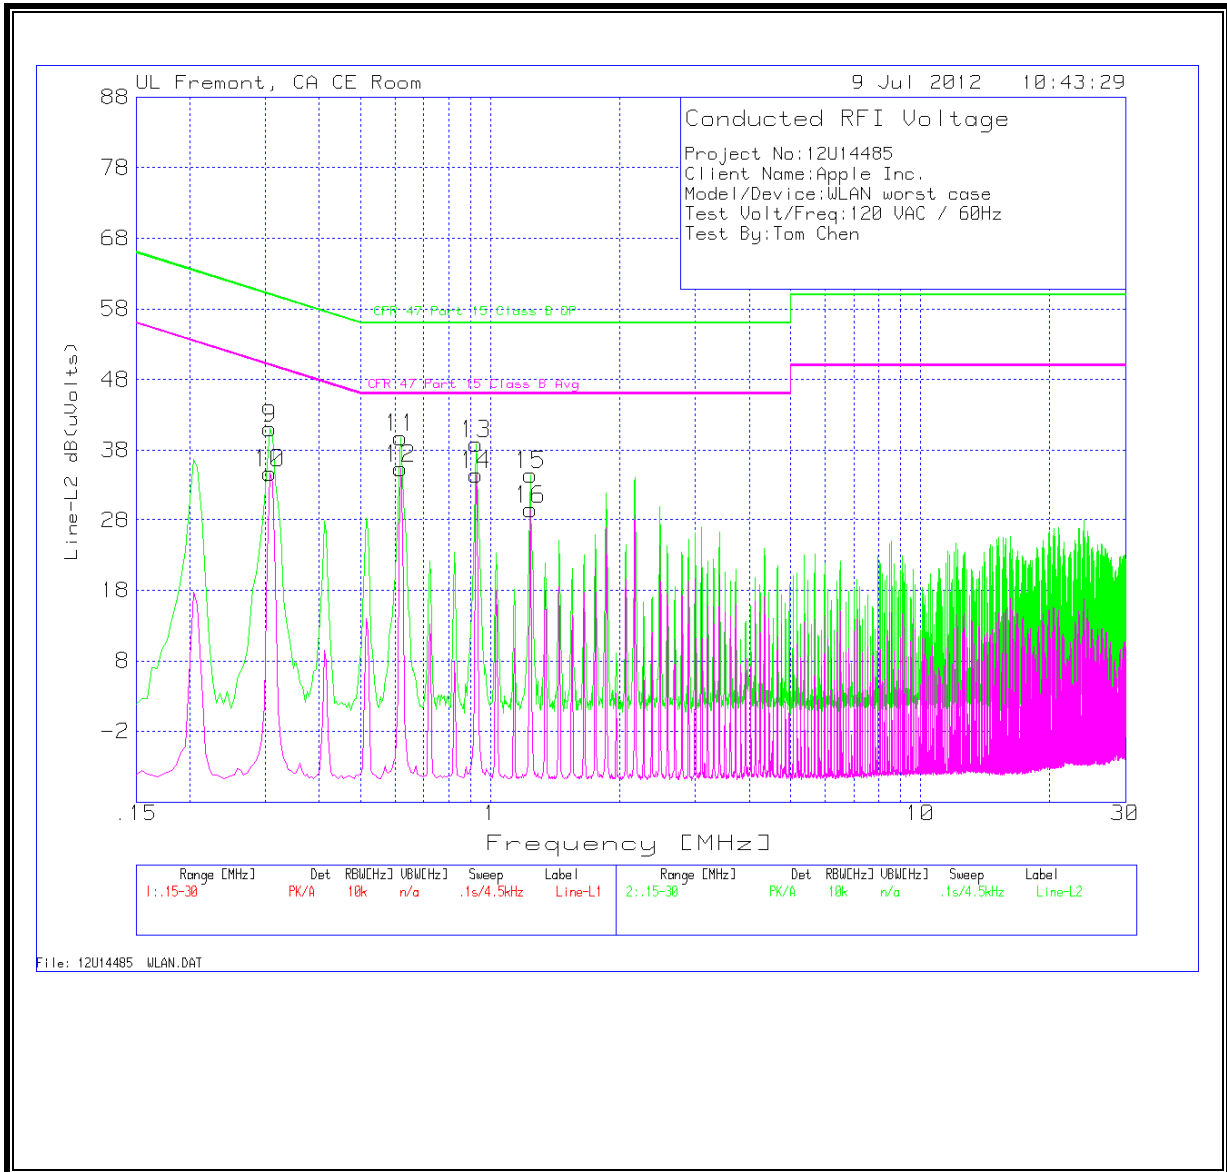

11. DYNAMIC FREQUENCY SELECTION

11.1. OVERVIEW

11.1.1. LIMITS

INDUSTRY CANADA

IC RSS-210 is closely harmonized with FCC Part 15 DFS rules. The deviations are as follows:

RSS-210 Issue 7 A9.4 (b) (ii) **Channel Availability Check Time:** ...

Additional requirements for the band 5600-5650 MHz: Until further notice, devices subject to this Section shall not be capable of transmitting in the band 5600-5650 MHz, so that Environment Canada weather radars operating in this band are protected.

RSS-210 Issue 7 A9.4 (b) (iv) **Channel closing time:** the maximum channel closing time is 260 ms.

FCC

§15.407 (h) and FCC 06-96 APPENDIX "COMPLIANCE MEASUREMENT PROCEDURES FOR UNLICENSED-NATIONAL INFORMATION INFRASTRUCTURE DEVICES OPERATING IN THE 5250-5350 MHz AND 5470-5725 MHz BANDS INCORPORATING DYNAMIC FREQUENCY SELECTION".

Testing was also conducted per KDB 365942.

Table 1: Applicability of DFS requirements prior to use of a channel

Requirement	Operational Mode		
	Master	Client (without radar detection)	Client (with radar detection)
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
Uniform Spreading	Yes	Not required	Not required

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode		
	Master	Client (without DFS)	Client (with DFS)
DFS Detection Threshold	Yes	Not required	Yes
Channel Closing Transmission Time	Yes	Yes	Yes
Channel Move Time	Yes	Yes	Yes

Table 3: Interference Threshold values, Master or Client incorporating In-Service Monitoring

Maximum Transmit Power	Value (see note)
≥ 200 milliwatt	-64 dBm
< 200 milliwatt	-62 dBm
<p>Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna</p> <p>Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.</p>	

Table 4: DFS Response requirement values

Parameter	Value
<i>Non-occupancy period</i>	30 minutes
<i>Channel Availability Check Time</i>	60 seconds
<i>Channel Move Time</i>	10 seconds
<i>Channel Closing Transmission Time</i>	200 milliseconds + approx. 60 milliseconds over remaining 10 second period
<p>The instant that the <i>Channel Move Time</i> and the <i>Channel Closing Transmission Time</i> begins is as follows:</p> <p>For the Short pulse radar Test Signals this instant is the end of the <i>Burst</i>.</p> <p>For the Frequency Hopping radar Test Signal, this instant is the end of the last radar burst generated.</p> <p>For the Long Pulse radar Test Signal this instant is the end of the 12 second period defining the radar transmission.</p> <p>The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate channel changes (an aggregate of approximately 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.</p>	

Table 5 – Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (Microseconds)	PRI (Microseconds)	Pulses	Minimum Percentage of Successful Detection	Minimum Trials
1	1	1428	18	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

Table 6 – Long Pulse Radar Test Signal

Radar Waveform	Bursts	Pulses per Burst	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µsec)	Minimum Percentage of Successful Detection	Minimum Trials
5	8-20	1-3	50-100	5-20	1000-2000	80%	30

Table 7 – Frequency Hopping Radar Test Signal

Radar Waveform	Pulse Width (µsec)	PRI (µsec)	Burst Length (ms)	Pulses per Hop	Hopping Rate (kHz)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	300	9	.333	70%	30

SYSTEM OVERVIEW

The short pulse and long pulse signal generating system utilizes the NTIA software. The Vector Signal Generator has been validated by the NTIA. The hopping signal generating system utilizes the CCS simulated hopping method and system, which has been validated by the DoD, FCC and NTIA. The software selects waveform parameters from within the bounds of the signal type on a random basis using uniform distribution.

The short pulse types 2, 3 and 4, and the long pulse type 5 parameters are randomized at run-time.

The hopping type 6 pulse parameters are fixed while the hopping sequence is based on the August 2005 NTIA Hopping Frequency List. The initial starting point randomized at run-time and each subsequent starting point is incremented by 475. Each frequency in the 100-length segment is compared to the boundaries of the EUT Detection Bandwidth and the software creates a hopping burst pattern in accordance with Section 7.4.1.3 Method #2 Simulated Frequency Hopping Radar Waveform Generating Subsystem of FCC 06-96 APPENDIX. The frequency of the signal generator is incremented in 1 MHz steps from F_L to F_H for each successive trial. This incremental sequence is repeated as required to generate a minimum of 30 total trials and to maintain a uniform frequency distribution over the entire Detection Bandwidth.

The signal monitoring equipment consists of a spectrum analyzer. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection and max hold.

SYSTEM CALIBRATION

A 50-ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected to a horn antenna via a coaxial cable, with the reference level offset set to (horn antenna gain – coaxial cable loss). The signal generator is set to CW mode. The amplitude of the signal generator is adjusted to yield a level of –64 dBm as measured on the spectrum analyzer.

Without changing any of the instrument settings, the spectrum analyzer is reconnected to the Common port of the Spectrum Analyzer Combiner/Divider. The Reference Level Offset of the spectrum analyzer is adjusted so that the displayed amplitude of the signal is –64 dBm.

The spectrum analyzer displays the level of the signal generator as received at the antenna ports of the Master Device. The interference detection threshold may be varied from the calibrated value of –64 dBm and the spectrum analyzer will still indicate the level as received by the Master Device.

ADJUSTMENT OF DISPLAYED TRAFFIC LEVEL

A link is established between the Master and Slave and the distance between the units is adjusted as needed to provide a suitable received level at the Master and Slave devices. The video test file is streamed to generate WLAN traffic. The monitoring antenna is adjusted so that the WLAN traffic level, as displayed on the spectrum analyzer, is at lower amplitude than the radar detection threshold.


TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the DFS tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset Number	Cal Due
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4440A	C01178	08/15/12
Vector Signal Generator, 20GHz	Agilent / HP	E8267C	C01066	11/17/12

11.1.3. SETUP OF EUT (CLIENT MODE)

RADIATED METHOD TEST SETUP

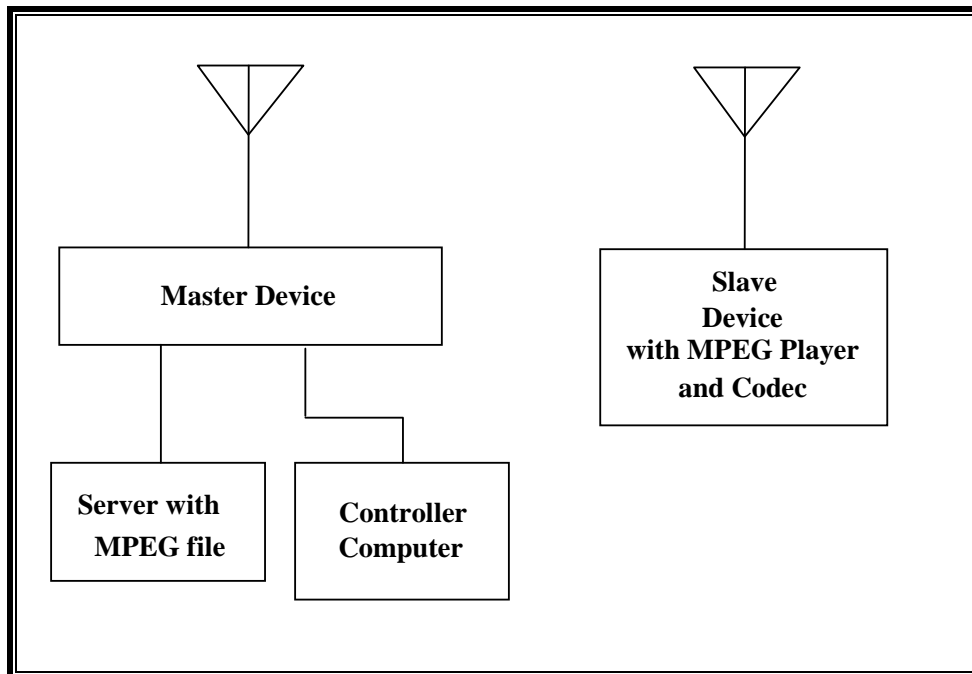


SUPPORT EQUIPMENT

The following support equipment was utilized for the DFS tests documented in this report:

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Wireless Access Point (Master Device)	Cisco	AIR-AP1252AG-A-K9	FTX130390D9	LDK102061
AC Adapter (AP)	Delta Electronics	EADP-45BB B	DTH1049902N	DoC
Notebook PC (Server)	Apple	MacBook Pro A1150	AOU257941	DoC
AC Adapter (Server)	Delta Electronics	A1344	MV05104CNAL1A	DoC
Notebook PC (Controller)	Dell	PP18L	10657517725	DoC
AC Adapter (Controller PC)	Dell	LA65SN0-00	CN-ODF263-71615-6AU-1019	DoC

11.1.4. SETUP OF EUT (CLIENT-TO-CLIENT COMMUNICATIONS MODE)

RADIATED METHOD TEST SETUP

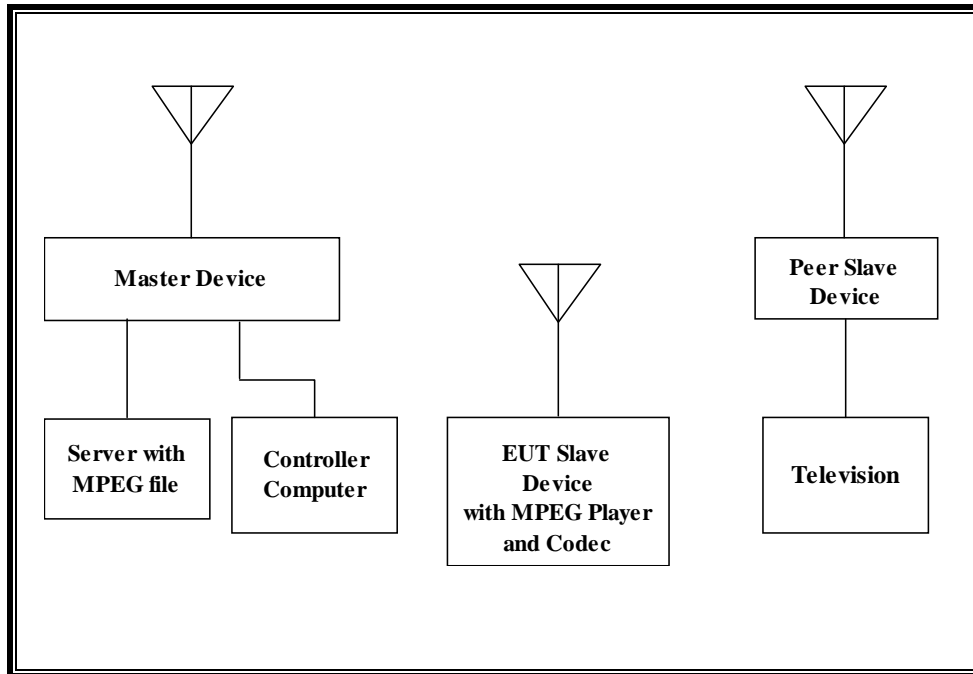

SUPPORT EQUIPMENT

The following support equipment was utilized for the DFS tests documented in this report:

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Wireless Access Point (Master Device)	Cisco	AIR-AP1252AG-A-K9	FTX130390D9	LDK102061
AC Adapter (AP)	Delta Electronics	EADP-45BB B	DTH1049902N	DoC
Notebook PC (Server)	Apple	MacBook Pro A1150	AOU257941	DoC
AC Adapter (Server)	Delta Electronics	A1344	MV05104CNAL1A	DoC
Notebook PC (Controller)	Dell	PP18L	10657517725	DoC
AC Adapter (Controller PC)	Dell	LA65SN0-00	CN-ODF263-71615-6AU-1019	DoC
Apple TV (Peer Slave Device)	Apple	A1427	C07GY040F14P	BCGA1427
LCD Television	Samsung	T23A350	Z3VEHCRC300508H	DoC

11.1.5. DESCRIPTION OF EUT

The EUT operates over the 5250-5350 MHz and 5470-5725 MHz ranges.

The EUT is a Slave Device without Radar Detection.

The highest power level within these bands is 16.53 dBm EIRP in the 5250-5350 MHz band and 17.72 dBm EIRP in the 5470-5725 MHz band.

The only antenna assembly utilized with the EUT has a gain of 1.35 dBi in the 5250-5350 MHz band and 3.08 dBi in the 5470-5725 MHz band.

The rated output power of the Master unit is > 23dBm (EIRP). Therefore the required interference threshold level is -64 dBm. After correction for procedural adjustments, the required radiated threshold at the antenna port is $-64 + 1 = -63$ dBm.

The calibrated radiated DFS Detection Threshold level is set to -64 dBm. The tested level is lower than the required level hence it provides margin to the limit.

The EUT uses one transmitter/receiver chain connected to an antenna to perform radiated tests.

In the client mode, WLAN traffic is generated by streaming the video file TestFile.mp2 "6 ½ Magic Hours" from the Master to the Slave in full motion video mode using Safari web browser. In the Client-to-Client Communications mode, WLAN traffic is generated by streaming the video file TestFile.mp2 "6 ½ Magic Hours" from the Master, to the Slave, and mirror to the peer slave device in full motion video mode using Safari web browser.

TPC is not required since the maximum EIRP is less than 500 mW (27 dBm).

The EUT utilizes the 802.11a/n architecture. Two nominal channel bandwidths of 20 MHz and 40 MHz are implemented in standard client mode. One nominal channel bandwidth of 20 MHz is implemented in client-to-client communications mode.

The software installed in the EUT is IOS (Build 10A371).

UNIFORM CHANNEL SPREADING

This requirement is not applicable to Slave radio devices.

OVERVIEW OF MASTER DEVICE WITH RESPECT TO §15.407 (h) REQUIREMENTS

The Master Device is a Cisco Access Point, FCC ID: LDK102061. The minimum antenna gain for the Master Device is 3.5 dBi.

The rated output power of the Master unit is $> 23\text{dBm}$ (EIRP). Therefore the required interference threshold level is -64 dBm . After correction for procedural adjustments, the required radiated threshold at the antenna port is $-64 + 1 = -63\text{ dBm}$.

The calibrated radiated DFS Detection Threshold level is set to -64 dBm . The tested level is lower than the required level hence it provides margin to the limit.

The software installed in the access point is 12.4(25d)JA1.


11.2. CLIENT MODE RESULTS FOR 20 MHz BANDWIDTH

11.2.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5500 MHz.

11.2.2. RADAR WAVEFORM AND TRAFFIC

RADAR WAVEFORM

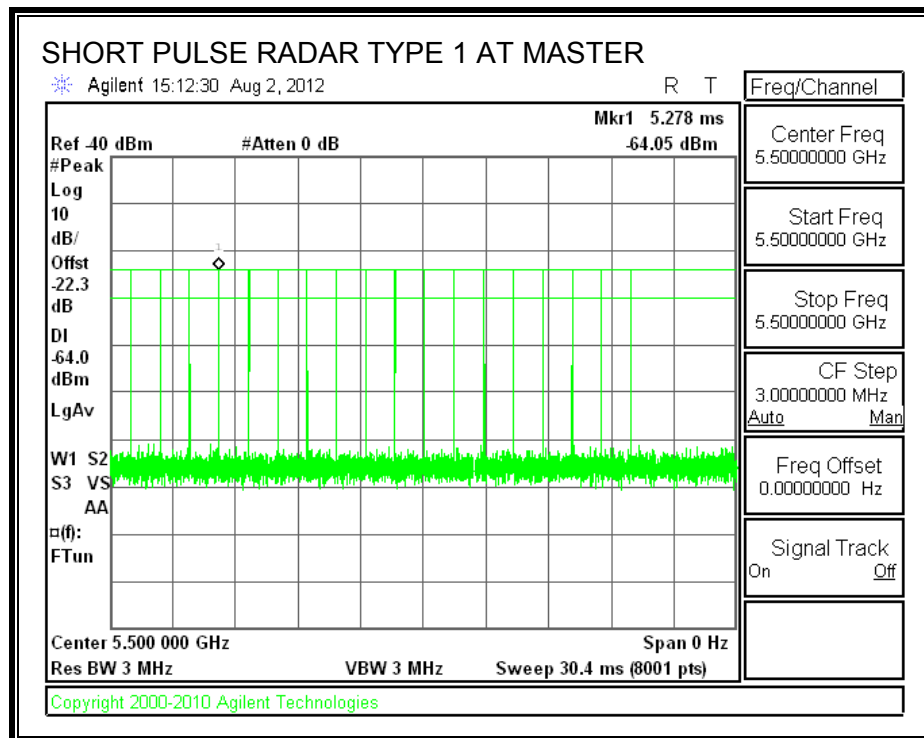

TRAFFIC

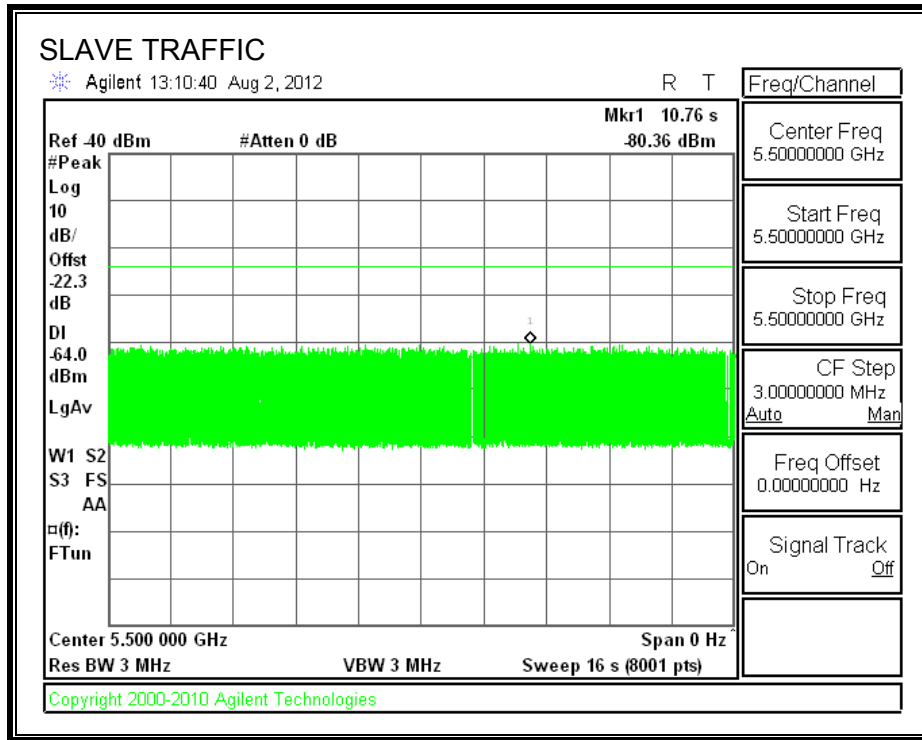

11.2.3. OVERLAPPING CHANNEL TESTS

RESULTS

These tests are not applicable.

11.2.4. MOVE AND CLOSING TIME

REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =
(Number of analyzer bins showing transmission) * (dwell time per bin)

The observation period over which the FCC aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).


The observation period over which the IC aggregate time is calculated begins at (Reference Marker) and ends no earlier than (Reference Marker + 10 sec).

RESULTS


Agency	Channel Move Time (sec)	Limit (sec)
FCC / IC	0.070	10

Agency	Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
FCC	0.0	60
IC	6.0	260

MOVE TIME

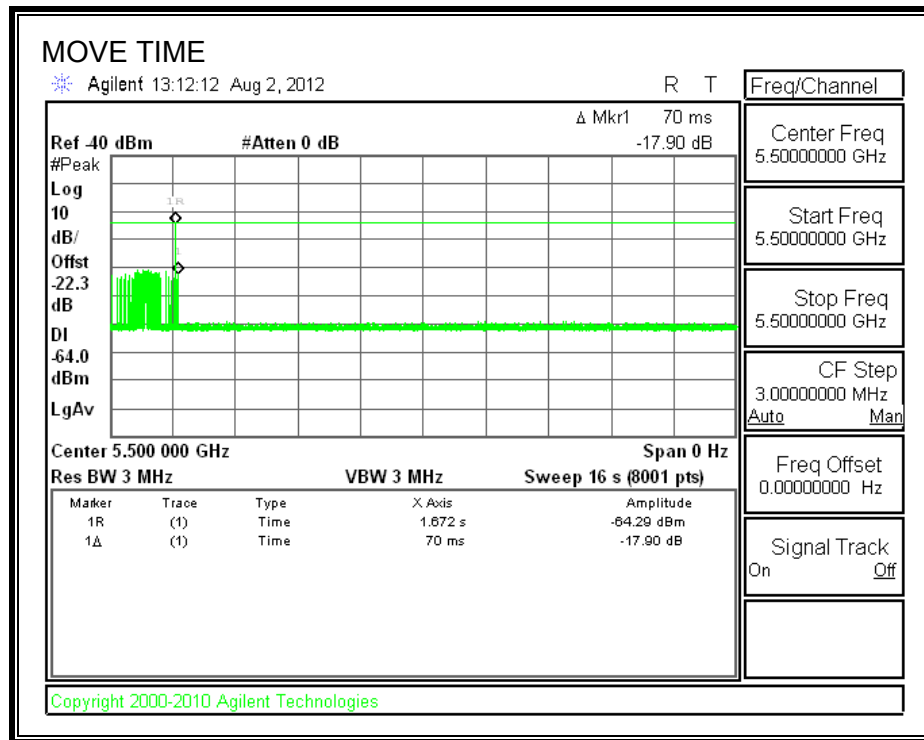


CHANNEL CLOSING TIME

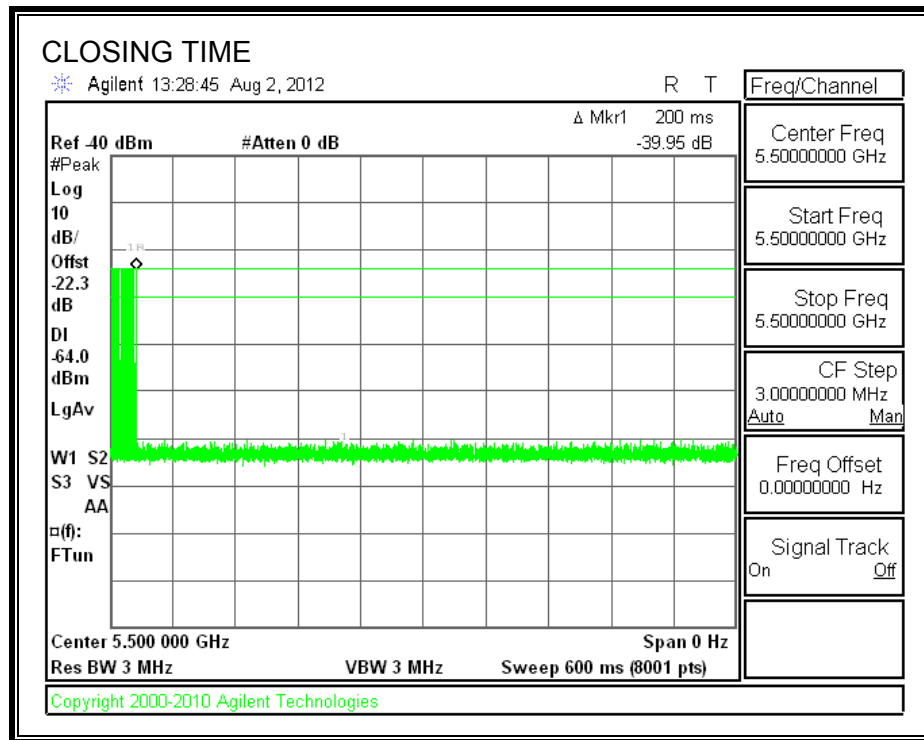


AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

No transmissions are observed during the FCC aggregate monitoring period.

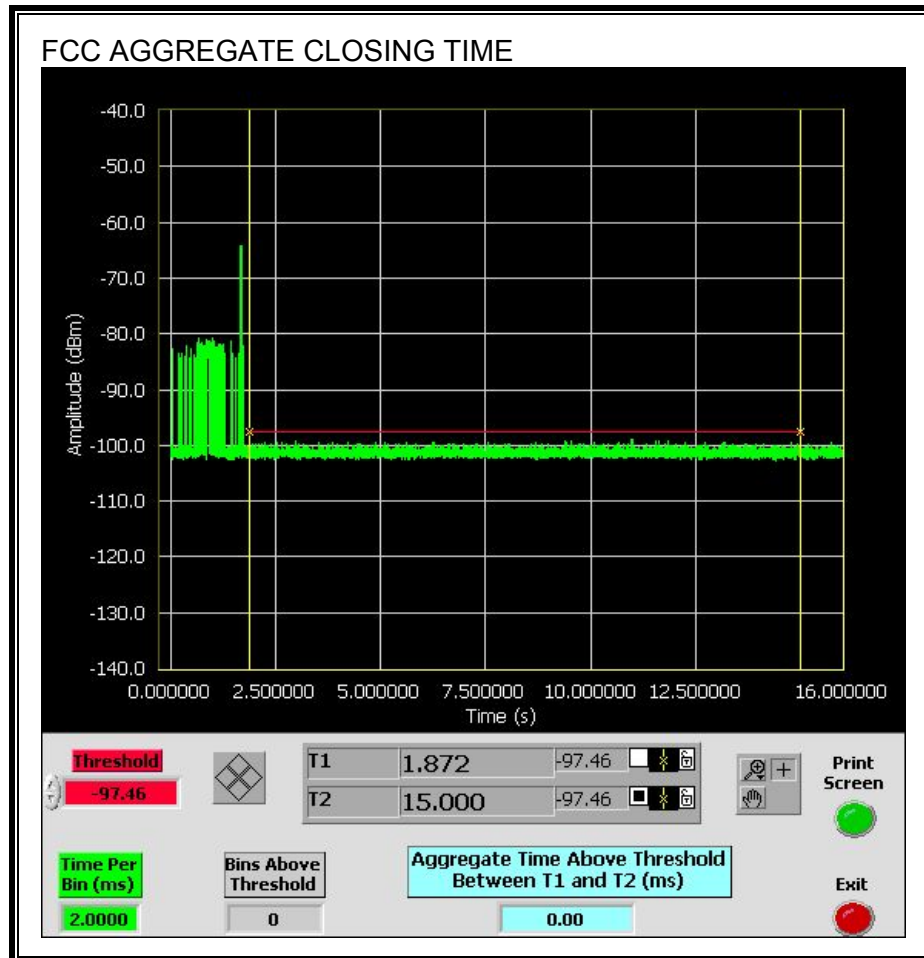

Only intermittent transmissions are observed during the aggregate monitoring period.

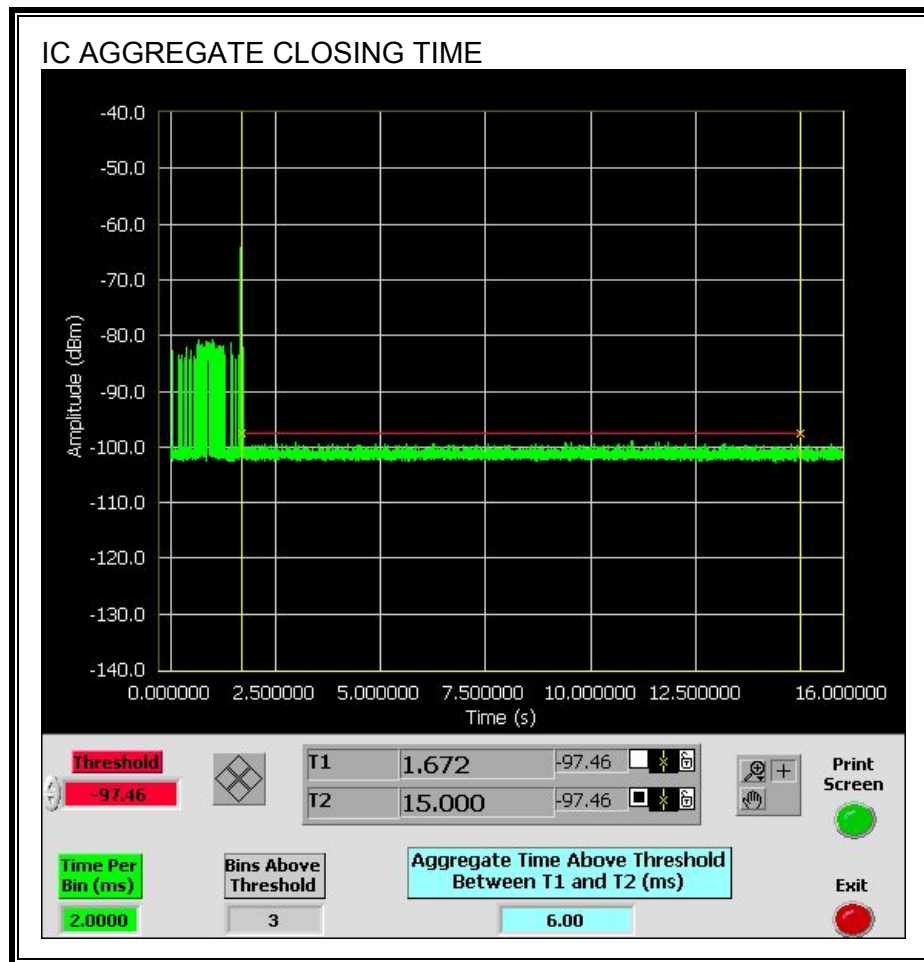


11.3. CLIENT MODE RESULTS FOR 40 MHz BANDWIDTH

11.3.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5510 MHz.

11.3.2. RADAR WAVEFORM AND TRAFFIC

RADAR WAVEFORM

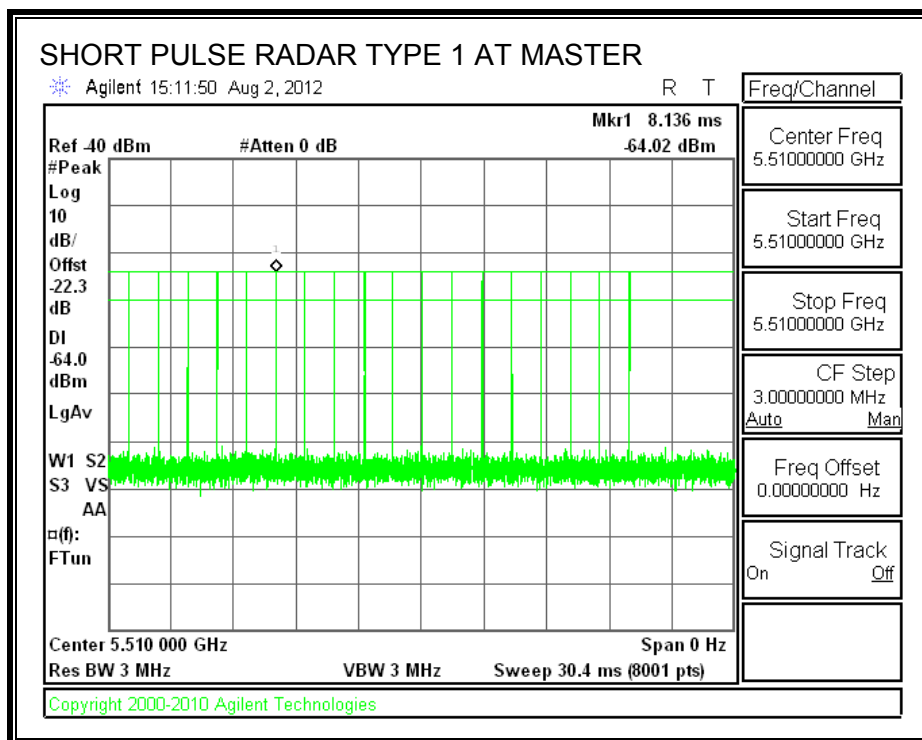

TRAFFIC

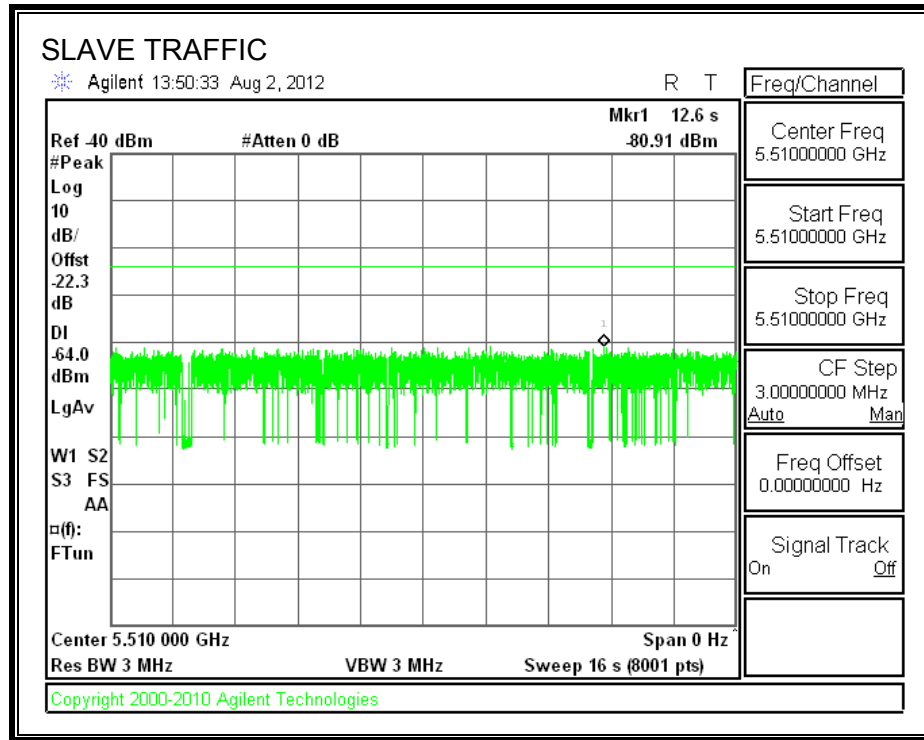

11.3.3. OVERLAPPING CHANNEL TESTS

RESULTS

These tests are not applicable.

11.3.4. MOVE AND CLOSING TIME

REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =
(Number of analyzer bins showing transmission) * (dwell time per bin)

The observation period over which the FCC aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).


The observation period over which the IC aggregate time is calculated begins at (Reference Marker) and ends no earlier than (Reference Marker + 10 sec).

RESULTS


Agency	Channel Move Time (sec)	Limit (sec)
FCC / IC	0.104	10

Agency	Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
FCC	0.0	60
IC	88.0	260

MOVE TIME

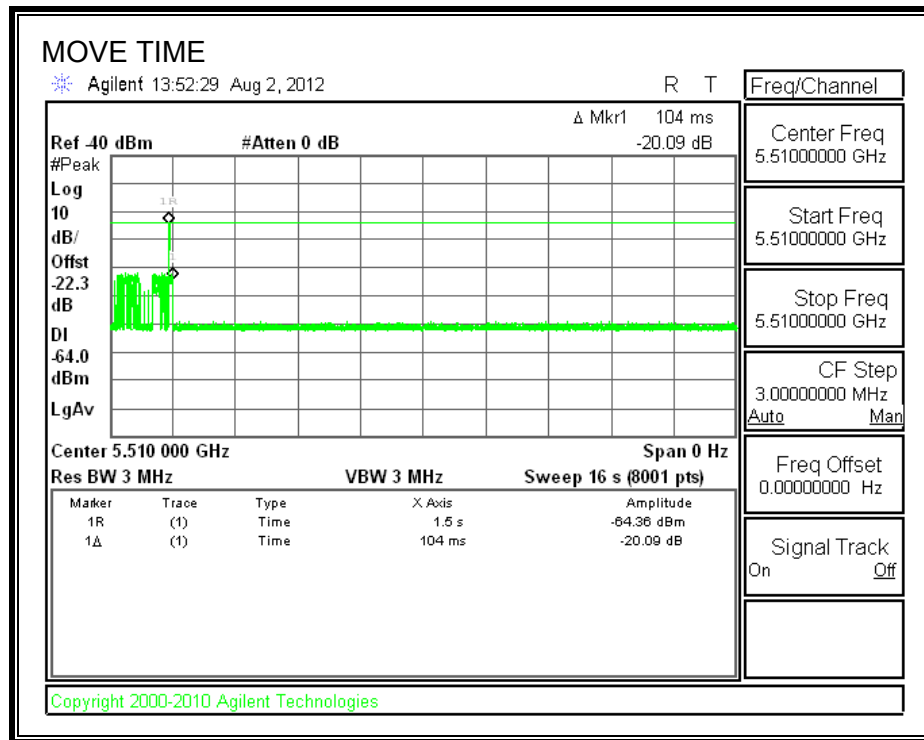


CHANNEL CLOSING TIME

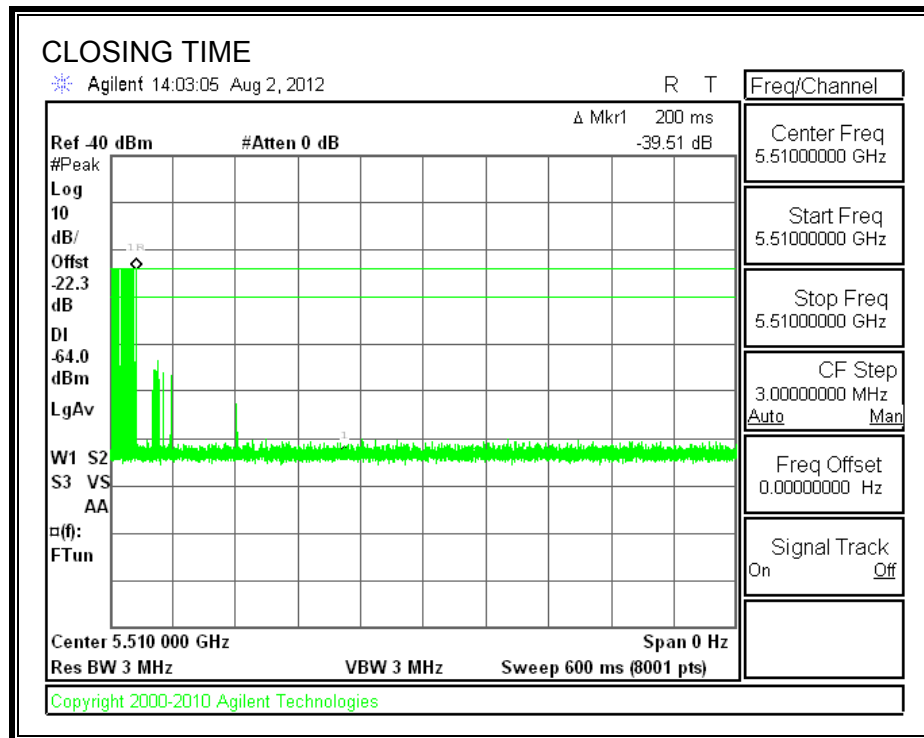


AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

No transmissions are observed during the FCC aggregate monitoring period.

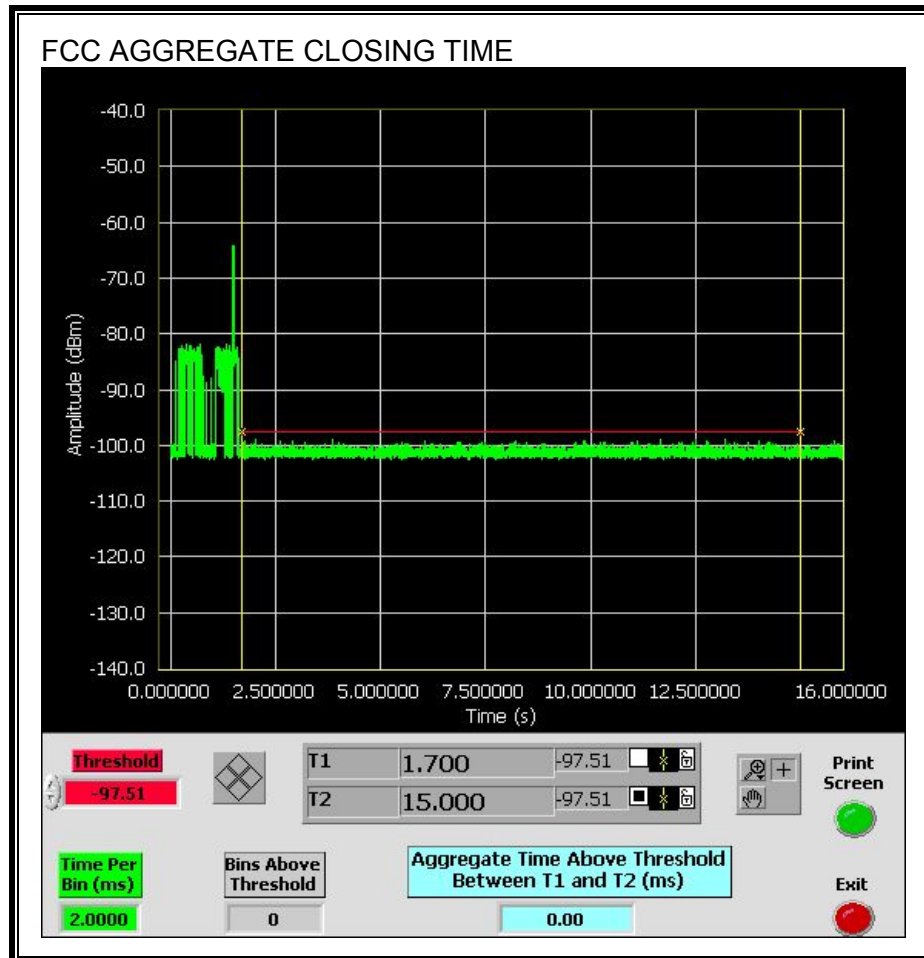


Only intermittent transmissions are observed during the IC aggregate monitoring period.

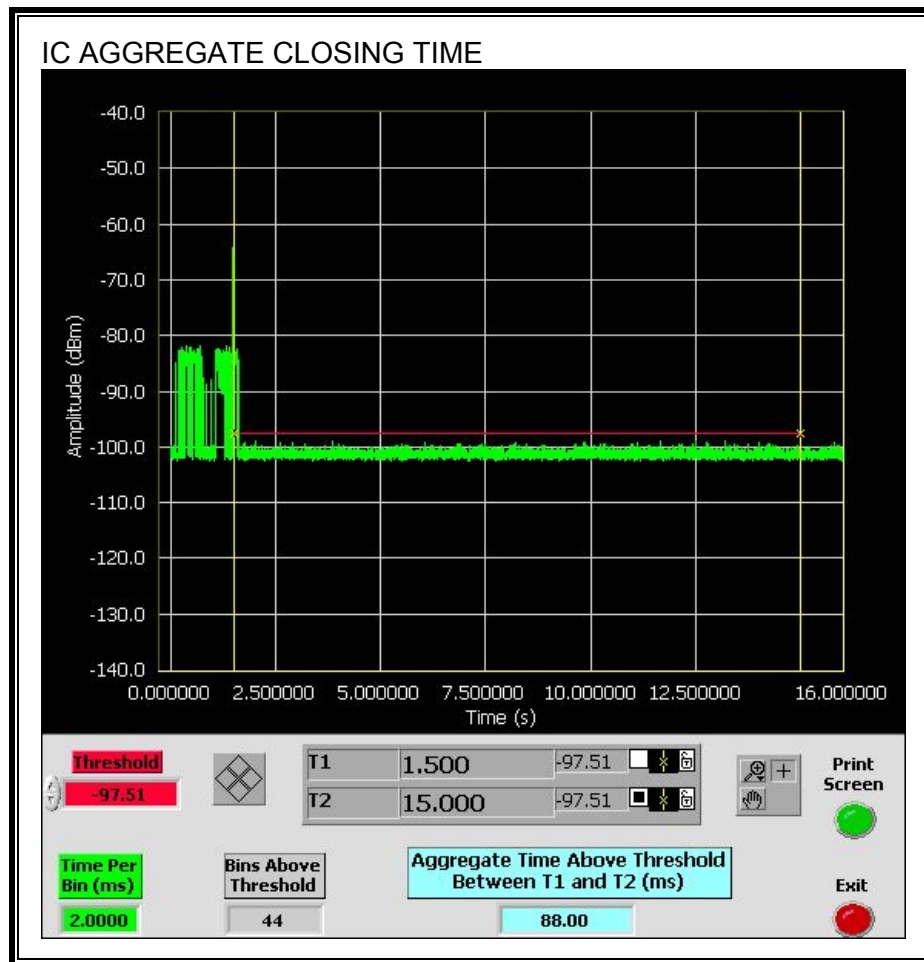

11.3.5. NON-OCCUPANCY PERIOD

RESULTS

No EUT transmissions were observed on the test channel during the 30-minute observation time.

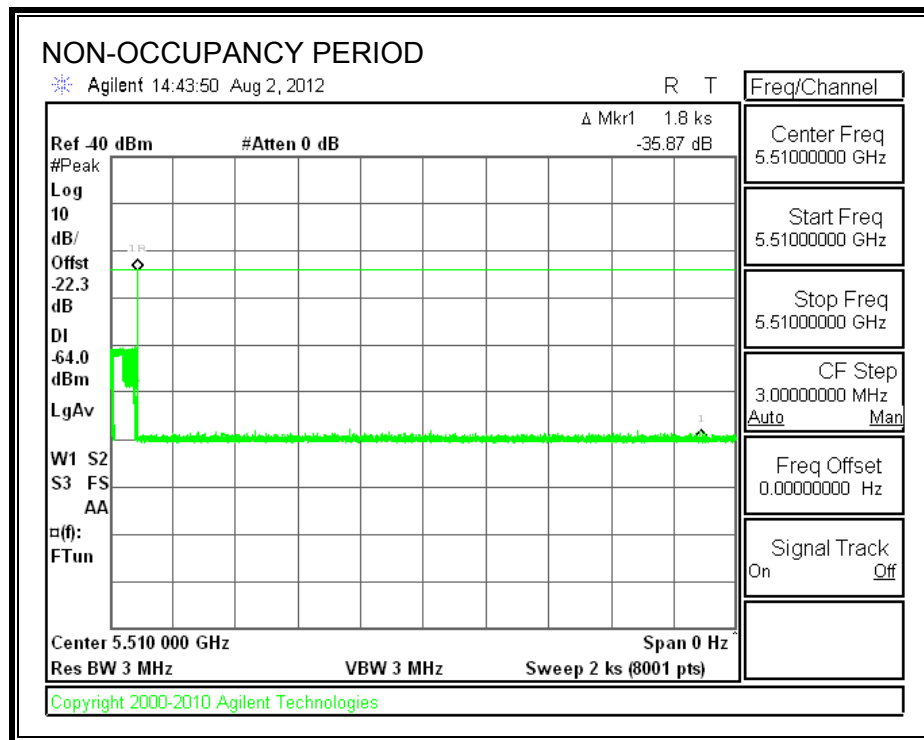


11.4. CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 20 MHz BANDWIDTH

11.4.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5500 MHz.

11.4.2. RADAR WAVEFORM AND TRAFFIC

RADAR WAVEFORM

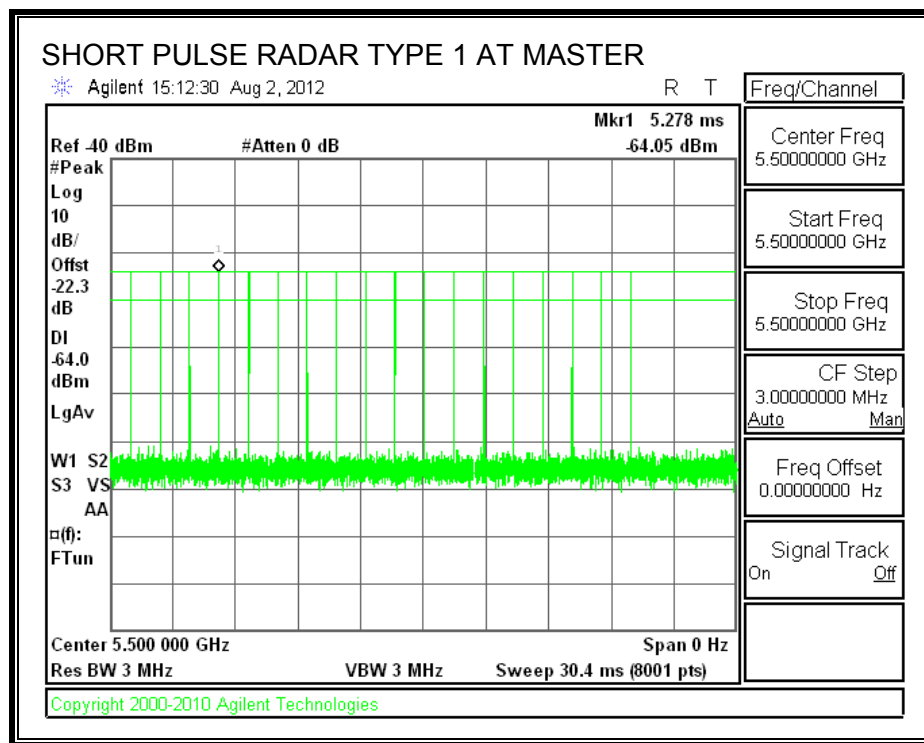

TRAFFIC

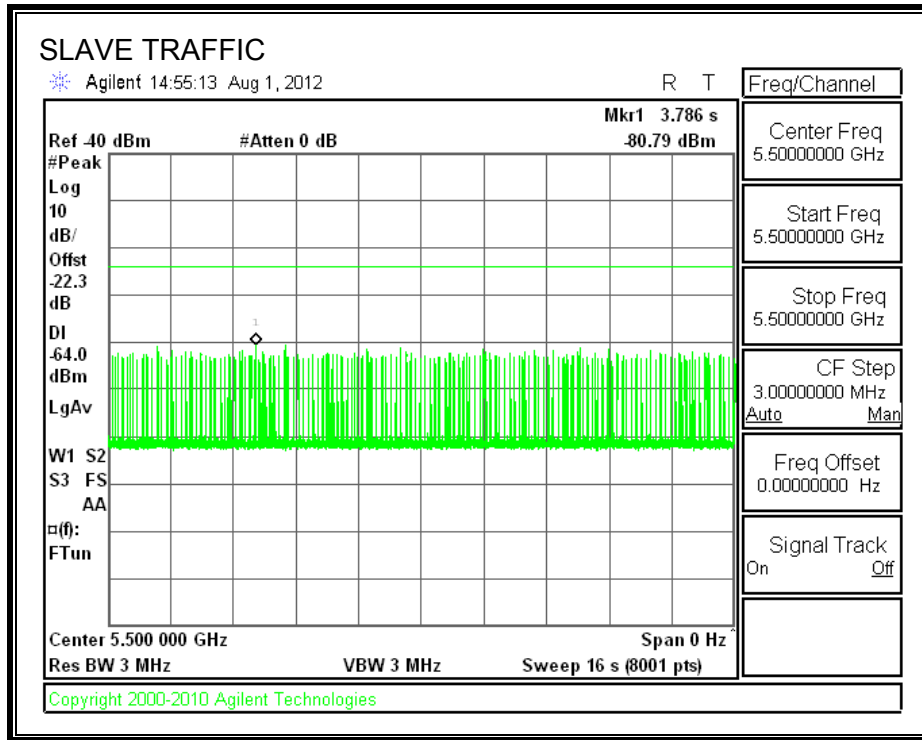

11.4.3. OVERLAPPING CHANNEL TESTS

RESULTS

These tests are not applicable.

11.4.4. MOVE AND CLOSING TIME

REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =
(Number of analyzer bins showing transmission) * (dwell time per bin)

The observation period over which the FCC aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).


The observation period over which the IC aggregate time is calculated begins at (Reference Marker) and ends no earlier than (Reference Marker + 10 sec).

RESULTS


Agency	Channel Move Time (sec)	Limit (sec)
FCC / IC	0.090	10

Agency	Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
FCC	0.0	60
IC	4.0	260

MOVE TIME

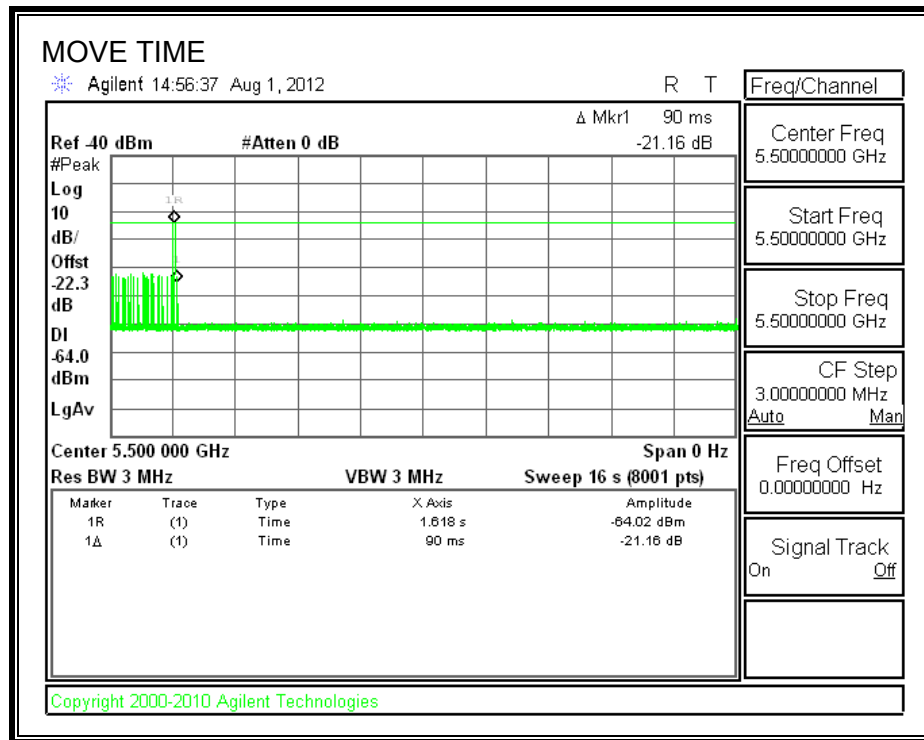


CHANNEL CLOSING TIME

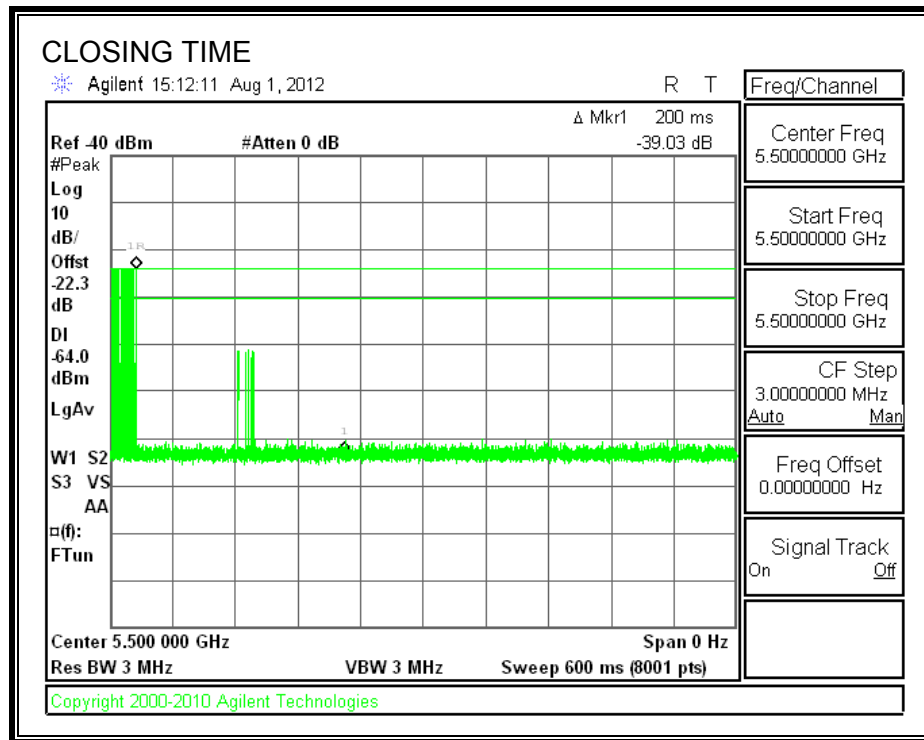


AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

No transmissions are observed during the FCC aggregate monitoring period.

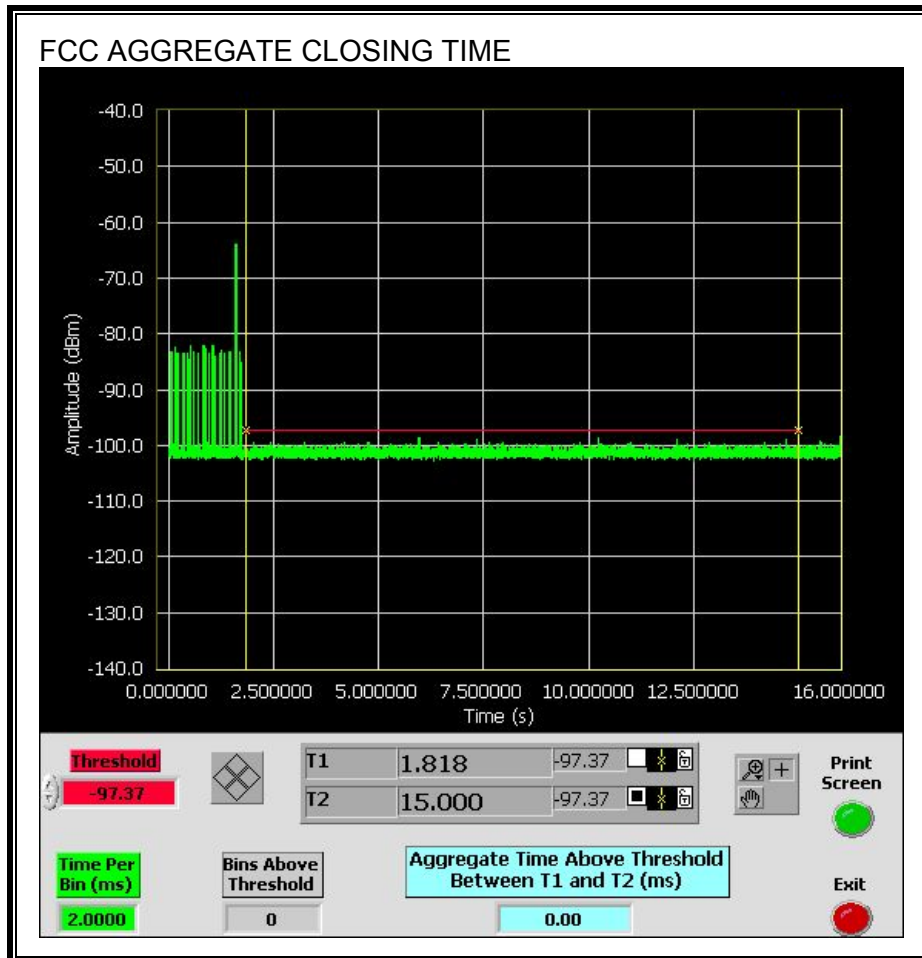

Only intermittent transmissions are observed during the IC aggregate monitoring period.

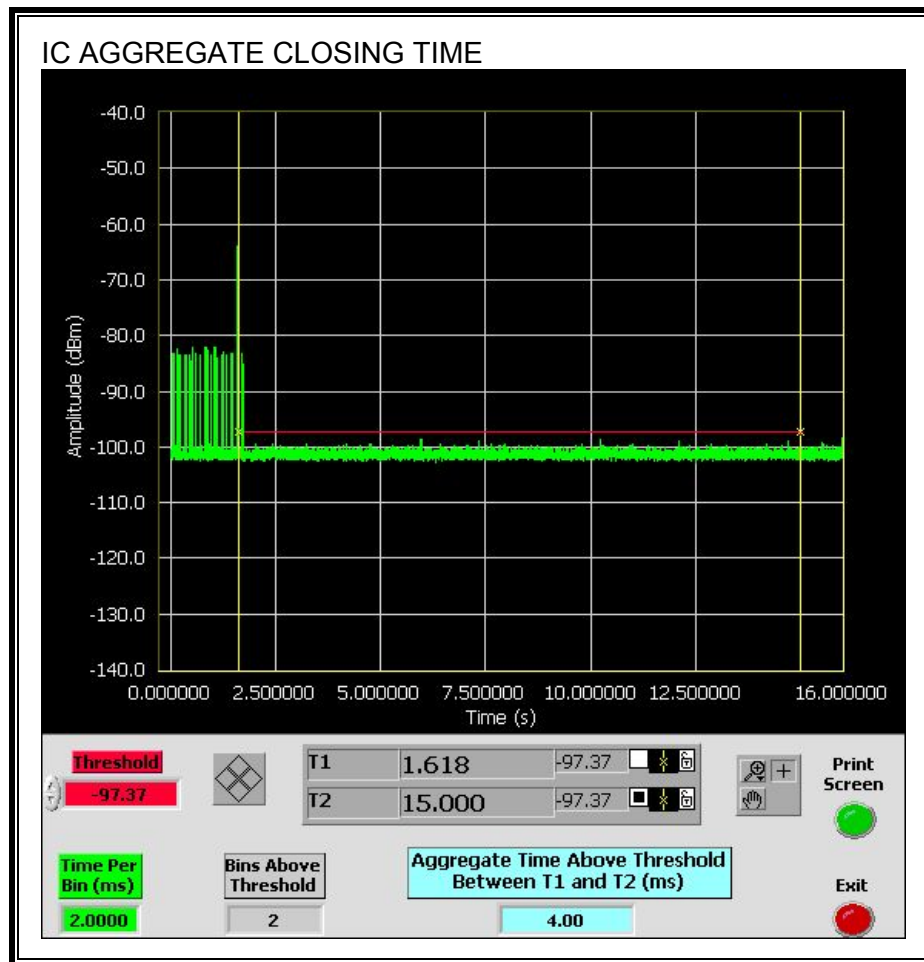

END OF REPORT