



**FCC 47 CFR PART 15 SUBPART C
INDUSTRY CANADA RSS-247 ISSUE 1**

**BLUETOOTH LOW ENERGY
CERTIFICATION TEST REPORT**

FOR

WIRELESS HEADPHONE

MODEL NUMBER: A1523

FCC ID: BCG-A1523

IC: 579C-A1523

REPORT NUMBER: 16U23784-E13V3

ISSUE DATE: AUGUST 29, 2016

Prepared for
APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

Prepared by
UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	08/22/2016	Initial Issue	Mengistu Mekuria
V2	08/26/2016	Address TCB's Questions	Chin Pang
V2	08/29/2016	Add below 1GHz and LC data	Chin Pang

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION.....	6
4. CALIBRATION AND UNCERTAINTY	7
4.1. MEASURING INSTRUMENT CALIBRATION	7
4.2. SAMPLE CALCULATION.....	7
4.3. MEASUREMENT UNCERTAINTY	7
5. EQUIPMENT UNDER TEST	8
5.1. DESCRIPTION OF EUT.....	8
5.2. MAXIMUM OUTPUT POWER.....	8
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	8
5.4. SOFTWARE AND FIRMWARE	8
5.5. WORST-CASE CONFIGURATION AND MODE.....	9
5.6. DESCRIPTION OF TEST SETUP.....	10
6. TEST AND MEASUREMENT EQUIPMENT	15
7. ANTENNA PORT TEST RESULTS	16
7.1. MEASUREMENT METHODS.....	16
7.2. ON TIME, DUTY CYCLE	17
7.3. 6 dB BANDWIDTH	19
7.4. 99% BANDWIDTH.....	22
7.5. AVERAGE POWER.....	25
7.6. OUTPUT POWER	26
7.7. POWER SPECTRAL DENSITY	27
7.8. CONDUCTED SPURIOUS EMISSIONS.....	30
8. RADIATED TEST RESULTS	34
8.1. LIMITS AND PROCEDURE	34
8.2. TRANSMITTER ABOVE 1 GHz	35
8.2.1. RESTRICTED BANDEDGE	35
8.2.2. HARMONICS AND SPURIOUS EMISSIONS	39
8.3. WORST-CASE BELOW 1 GHz	45
8.4. WORST-CASE 18 to 26 GHz	47
9. AC POWER LINE CONDUCTED EMISSIONS	49

10. SETUP PHOTOS	53
-------------------------------	-----------

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: WIRELESS HEADPHONE

MODEL: A1523

SERIAL NUMBER: CC4S30UZFKVP (Conducted) CC4S31VZFKVP (Radiated)


DATE TESTED: AUGUST 04, 2016 - AUGUST 26, 2016

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-247 Issue 1	Pass
INDUSTRY CANADA RSS-GEN Issue 4	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:



MENGISTU MEKURIA
PROJECT LEAD
UL VERIFICATION SERVICES INC.

Prepared By:



JOE VANG
EMC WISE ENGINEER
UL VERIFICATION SERVICES INC.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, KDB 558074 D01 v03r05, ANSI C63.10-2013, RSS-GEN Issue 4, and RSS-247 Issue 1.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☐ Chamber A	☐ Chamber D
☐ Chamber B	☐ Chamber E
☐ Chamber C	☐ Chamber F
	☒ Chamber G
	☐ Chamber H

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers A through H are covered under Industry Canada company address code 2324B with site numbers 2324B -1 through 2324B-8, respectively.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Radiated Disturbance, 26000 to 40000 MHz	5.24 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT (right) is one of a pair of earbuds for left and right ears, with Bluetooth Radio. It has an integral battery, microphone and antenna. The rechargeable battery is not user accessible. It can charge via bottom contacts and charge case. It is designed to work in conjunction with the left earbud..

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	BLE	9.98	9.95

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency Band (GHz)	Antenna Gain (dBi)
2.4	-7.20

5.4. SOFTWARE AND FIRMWARE

The software installed in the EUT during testing was 9A217.

5.5. WORST-CASE CONFIGURATION AND MODE

The worst-case mode and channel used for 30-1000 MHz radiated emissions and AC line conducted emission were including AC/DC charger, mode and channel with the highest output power. EUT transmit with Case cover open while in charging mode.

Above 1G radiated emission were performed with low, middle and high channels. And above 18GHz radiated emission were performed with the EUT only set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X/Y/Z, it was determined that x-flatbed orientation was worst-case orientation. Therefore, all final radiated testing was performed with the EUT in x-flatbed orientation.

Data rates set for test:

BLE: 1 Mbps.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop AC/DC adapter	Apple	A1424	NSW25679	N/A
Laptop	Apple	MacBook AIR	C02P52H6G085	N/A
USB	Apple	N/A	N/A	N/A
Test Jig Fixture	Apple	Proto2 Controller ARM	920-01148-01	N/A

I/O CABLES (CONDUCTED TEST)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	1	SMA	Un-Shielded	0.2	To spectrum Analyzer
2	USB	1	USB	Shielded	1	N/A
3	AC	1	AC	Un-shielded	2	N/A

I/O CABLES (RADIATED ABOVE 1 GHZ)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
None Used						


I/O CABLES (LC AND RADAITED BELOW 1 GHZ)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	USB	1	USB	Un-shielded	1	N/A

TEST SETUP- CONDUCTED PORT

The EUT was tested connected to a host Laptop via USB cable adapter and spectrum analyzer to antenna port. Test software exercised the EUT.


SETUP DIAGRAM

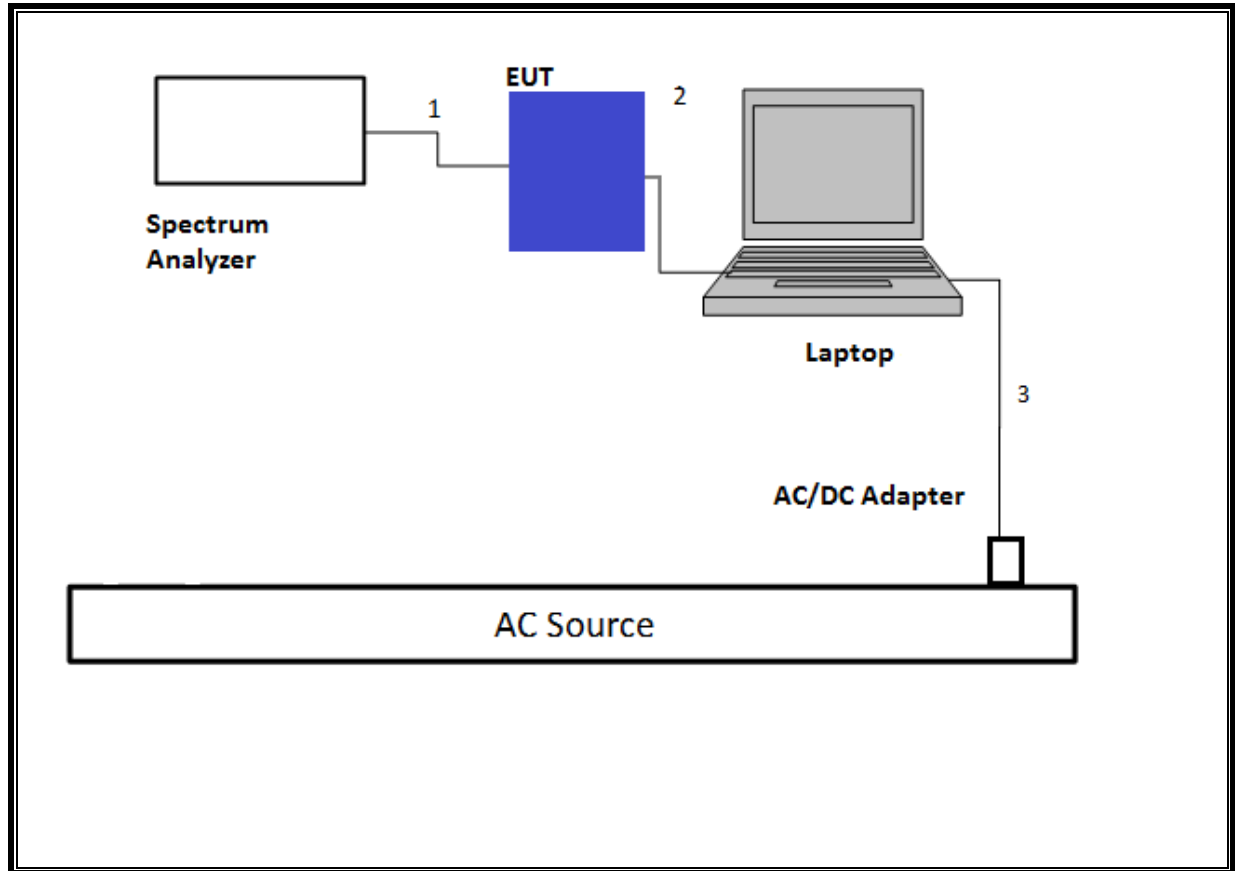

TEST SETUP- RADIATED-AND ABOVE 1 GHZ

The EUT was powered by battery. Test software exercised the EUT.


SETUP DIAGRAM

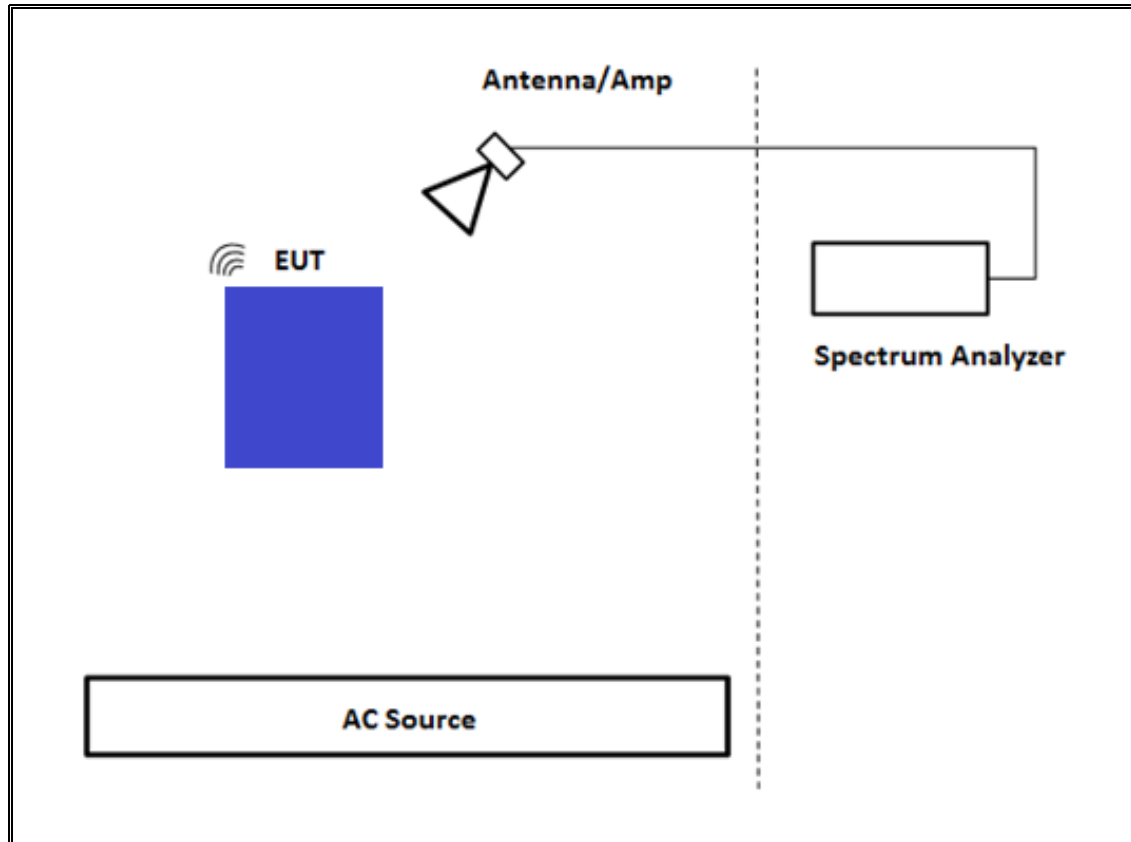

TEST SETUP- BELOW 1GHz

The EUT was tested with Case Cover open while charging and powered by AC/DC adapter via USB cable.


SETUP DIAGRAM

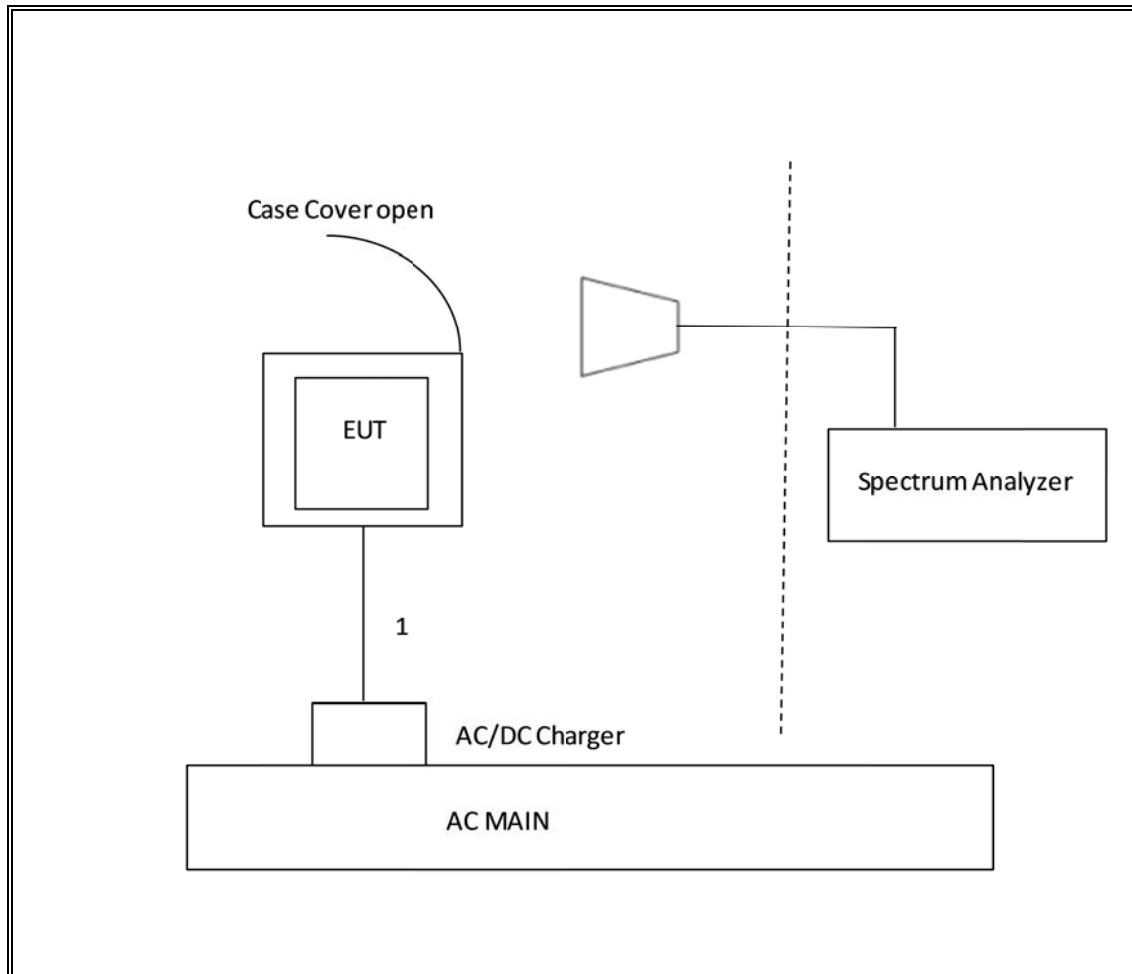

TEST SETUP- AC LINE CONDUCTED: AC/DC ADAPTER

The EUT was tested with Case Cover open while charging and powered by AC/DC adapter via USB cable.

SETUP DIAGRAM

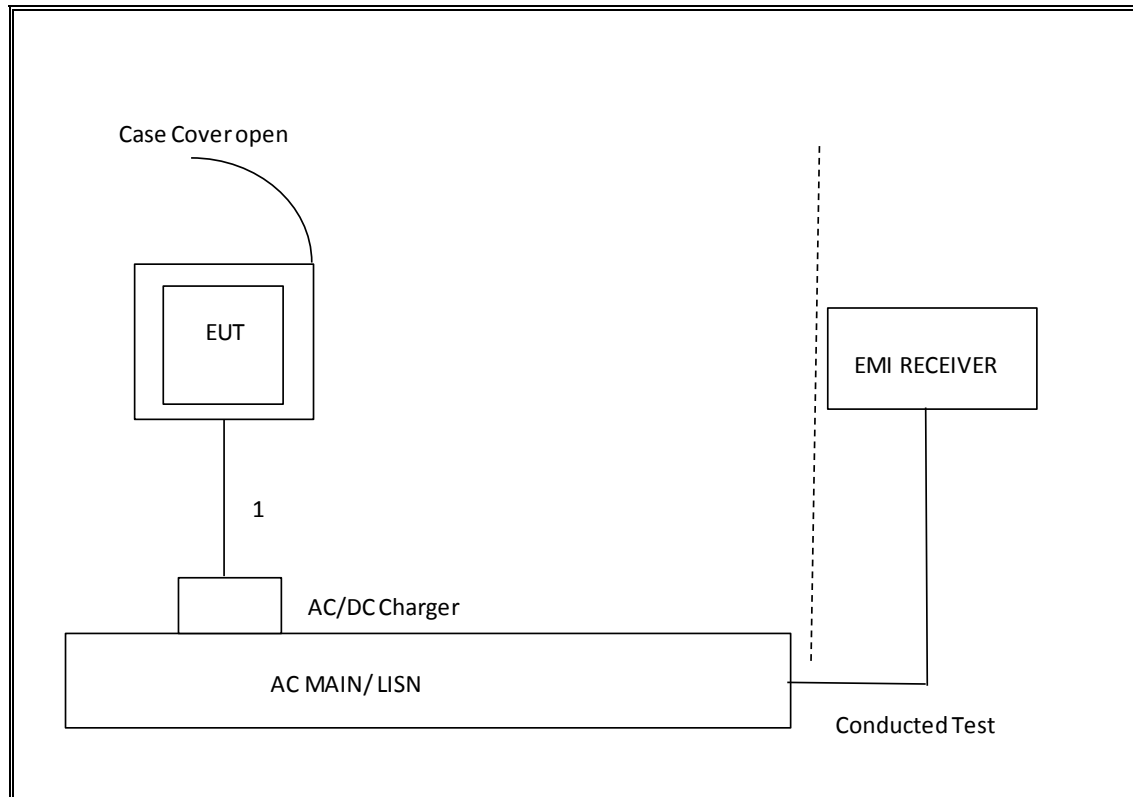

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	T Number	Cal Due
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T862	4/18/2017
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB3	T899	5/26/2017
Amplifier, 1 - 18GHz	Miteq	AFS42-00101800-25-S-42	T491	5/31/2017
Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	T834	6/17/2017
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent	N9030A	T905	6/21/2017
Power Meter, P-series single channel	Agilent	N1911A	T1271	7/8/2017
Power Sensor, P - series, 50MHz to 18GHz, Wideband	Agilent	N1921A	T1228	6/20/2017
Antenna, Horn 18 to 26.5GHz	ARA	MWH-1826	T447	6/16/2017
Spectrum Analyzer, 40 GHz	Agilent	N9030A	T340	11/15/2016
Amplifier, 1 to 26.5GHz, 23.5dB Gain minimum	Keysight	8449B	T402	7/5/2017
AC Line Conducted				
EMI Test Receiver 9KHz-7GHz	Rohde & Schwarz	ESCI7	T1436	12/19/2016
LISN for Conducted Emissions CISPR-16	Fischer	50/250-25-2-01	T1310	6/8/2017
AC Source	Shaffner	NSG 1007	T134	9/11/2016
UL SOFTWARE				
* Radiated Software	UL	UL EMC	Ver 9.5, June 24, 2015	
* Conducted Software	UL	UL EMC	Ver 4.0, January 11, 2016	
* AC Line Conducted Software	UL	UL EMC	Ver 9.5, May 26, 2015	

Note: * indicates automation software version used in the compliance certification testing

7. ANTENNA PORT TEST RESULTS

7.1. MEASUREMENT METHODS

6 dB BW: KDB 558074 D01 v03r05, Section 8.1.

Output Power: KDB 558074 D01 v03r05, Section 9.1.2.

Power Spectral Density: KDB 558074 D01 v03r05, Section 10.2.

Out-of-band emissions in non-restricted bands: KDB 558074 D01 v03r05, Section 11.0.

Out-of-band emissions in restricted bands: KDB 558074 D01 v03r05, Section 12.1.

Band-edge: KDB 558074 D01 v03r05, Section 12.1.

7.2. ON TIME, DUTY CYCLE

LIMITS

None; for reporting purposes only.


PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
BLE	100.000	100.000	1.000	100.00%	0.00	0.010

DUTY CYCLE PLOTS

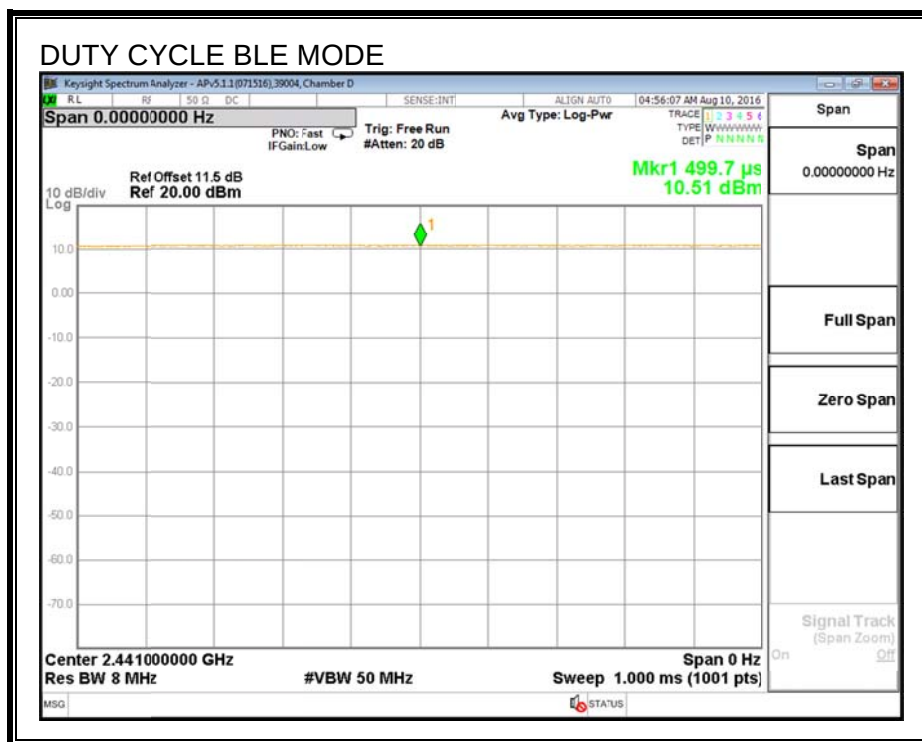

7.3. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)



IC RSS-247 (5.2) (1)


The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2402	0.754	0.5
Middle	2440	0.744	0.5
High	2480	0.702	0.5

6 dB BANDWIDTH

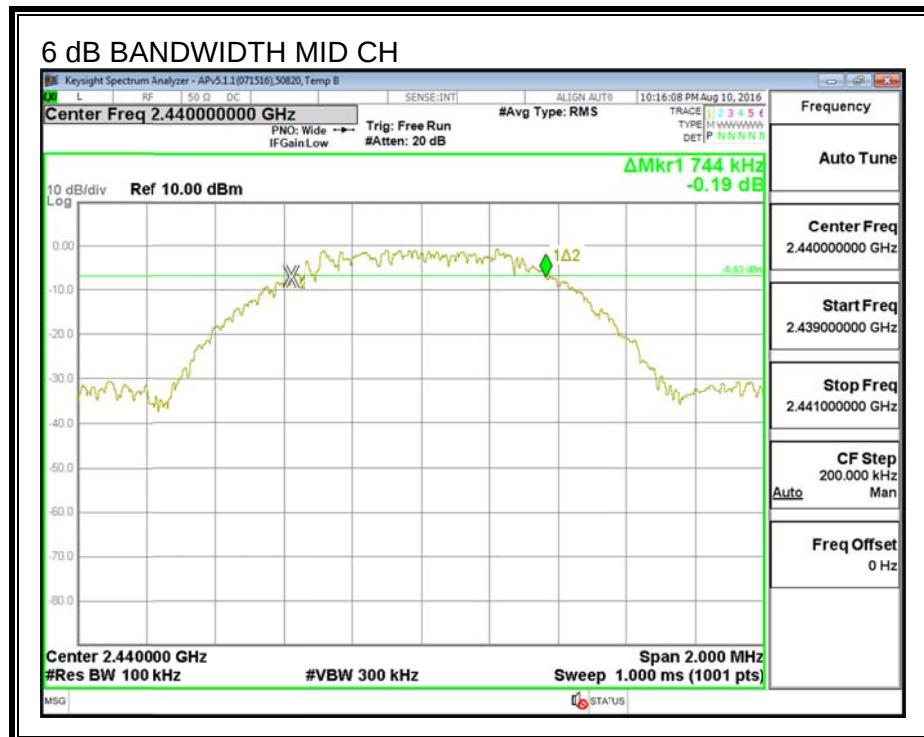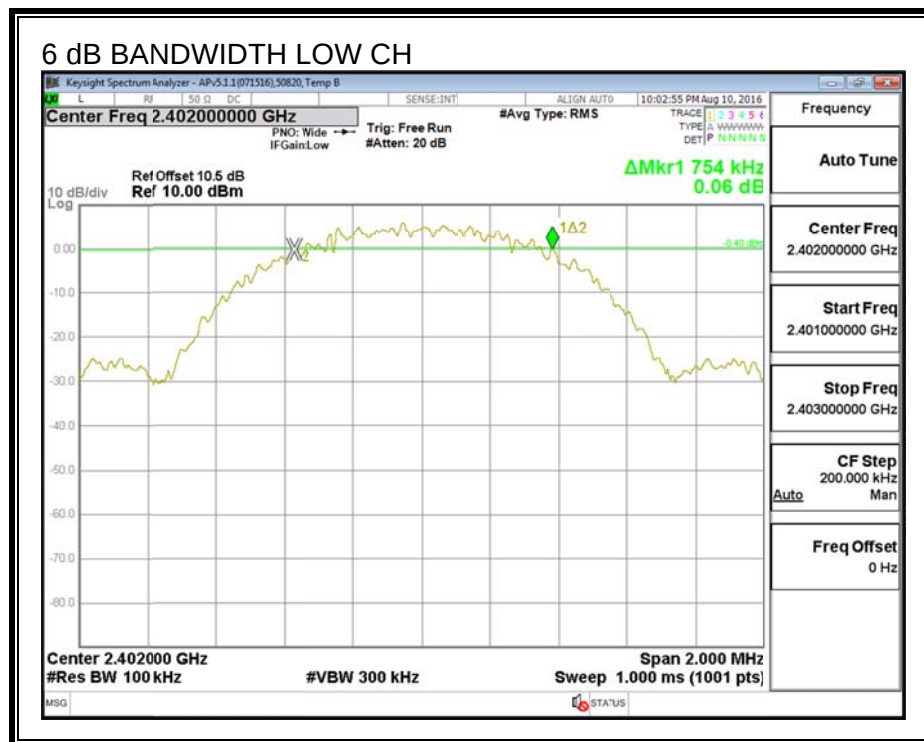

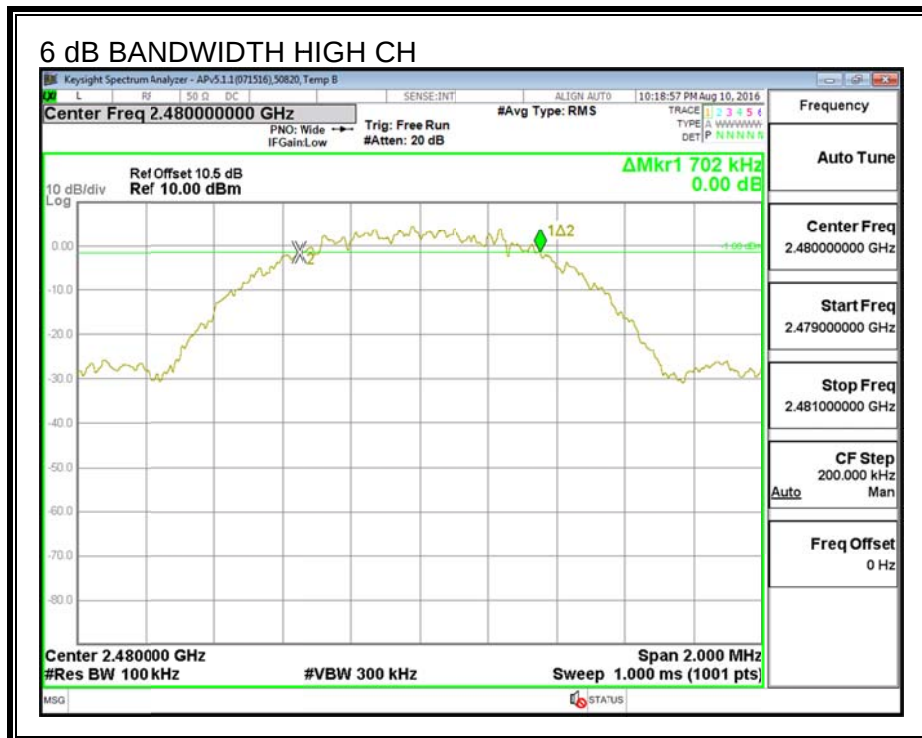

7.4. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.



TEST PROCEDURE


The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth or to 1% of the span. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	1.0350
Middle	2440	1.0411
High	2480	1.0426

99% BANDWIDTH

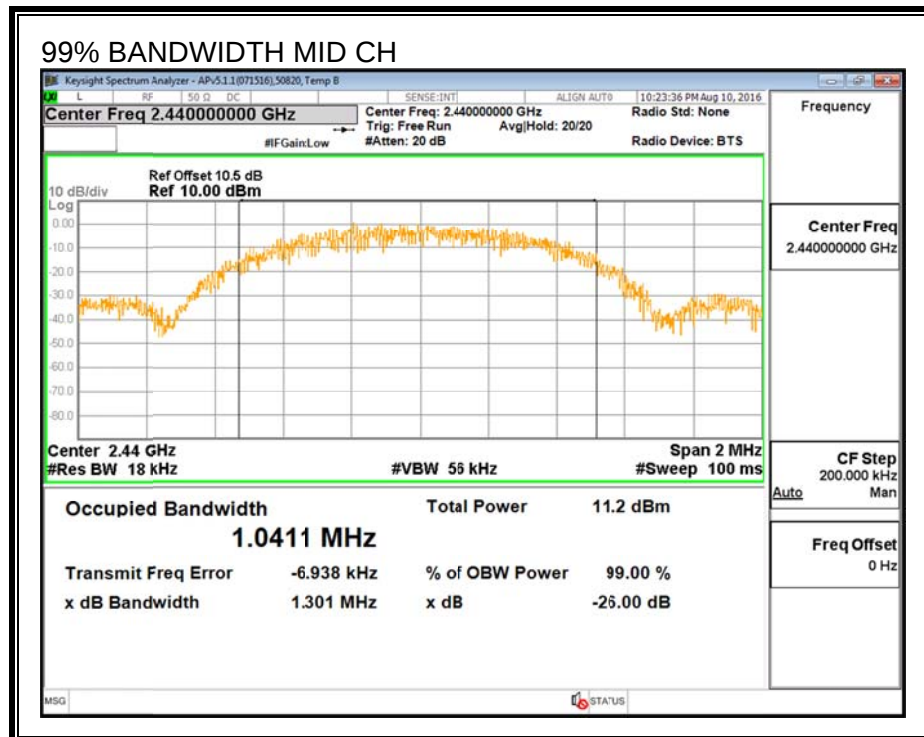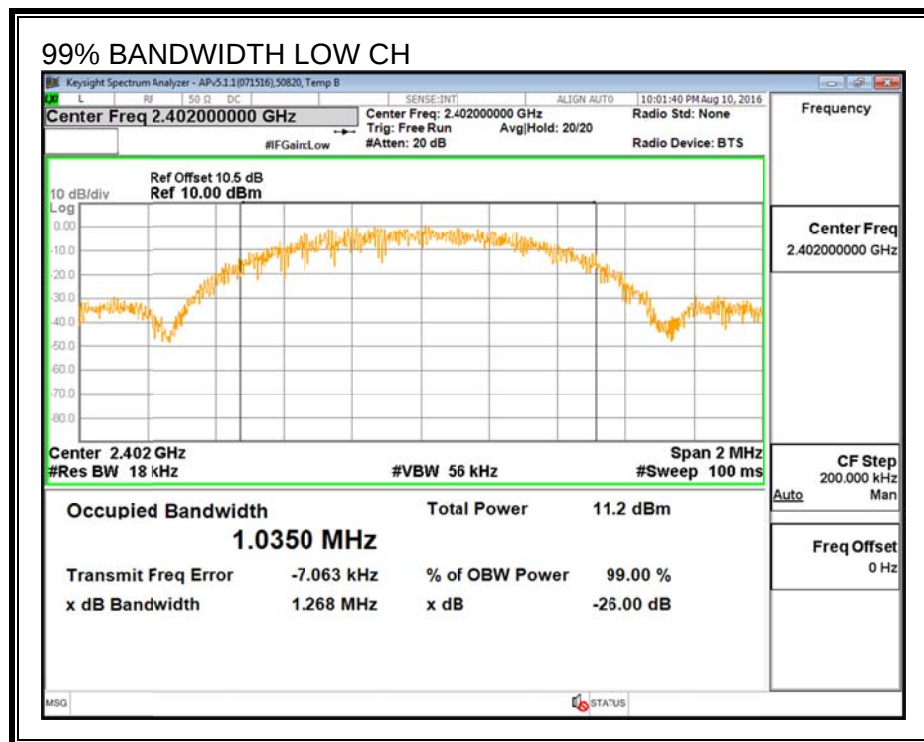

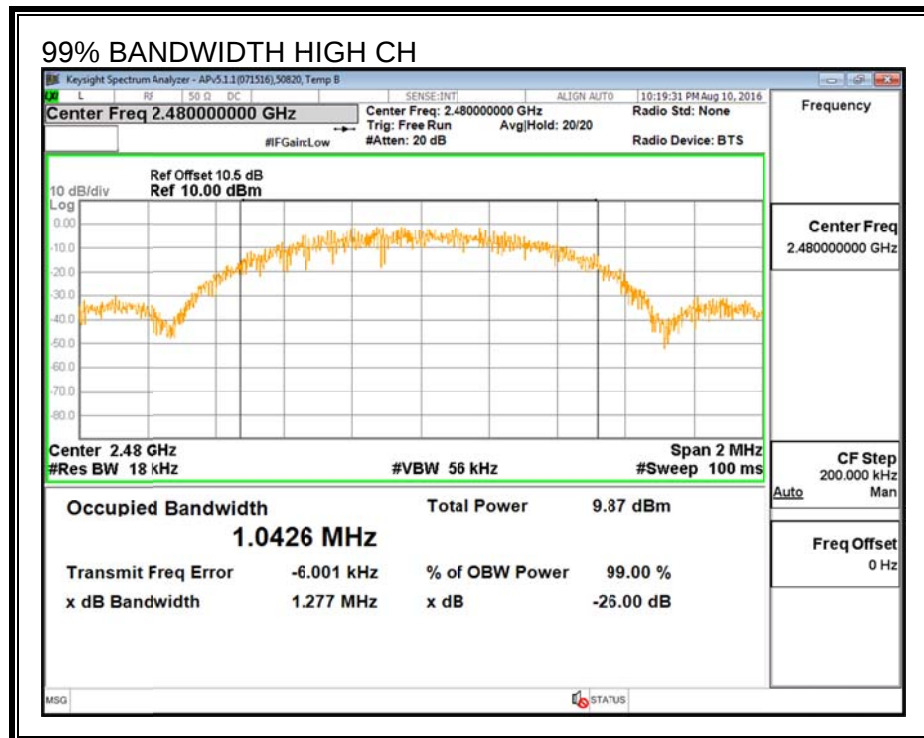

7.5. AVERAGE POWER

LIMITS

None; for reporting purposes only.

RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

ID:	50820	Date:	8/10/16
------------	-------	--------------	---------

Channel	Frequency (MHz)	AV power (dBm)
Low	2402	9.91
Middle	2440	9.94
High	2480	9.94

7.6. OUTPUT POWER

LIMITS

FCC §15.247 (b)

IC RSS-247 (5.4) (4)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

RESULTS

ID:	50820	Date:	8/10/16
------------	-------	--------------	---------

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	9.96	30	-20.040
Middle	2440	9.97	30	-20.030
High	2480	9.98	30	-20.020

7.7. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)



IC RSS-247 (5.2) (2)


The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

RESULTS

Channel	Frequency (MHz)	PSD (dBm)	Limit (dBm)	Margin (dB)
Low	2402	-4.366	8	-12.37
Middle	2440	-4.317	8	-12.32
High	2480	-5.663	8	-13.66

POWER SPECTRAL DENSITY

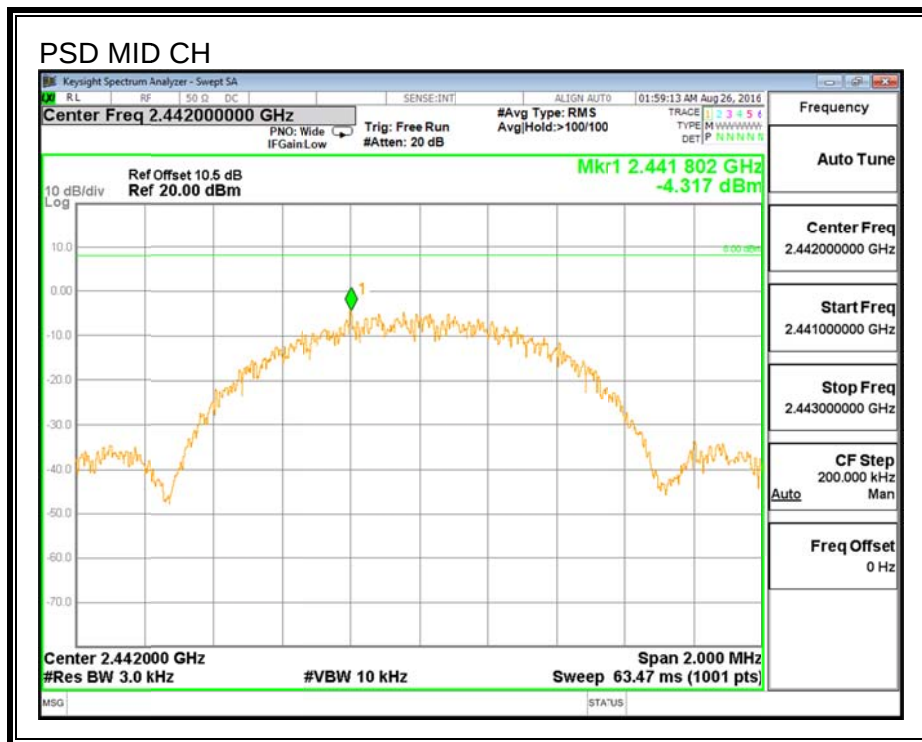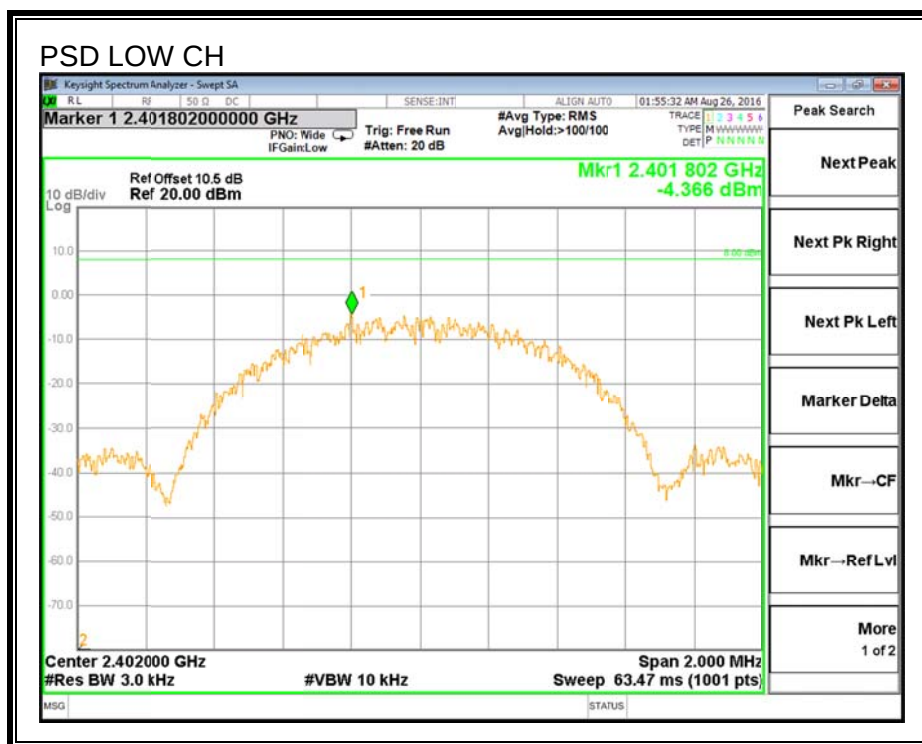

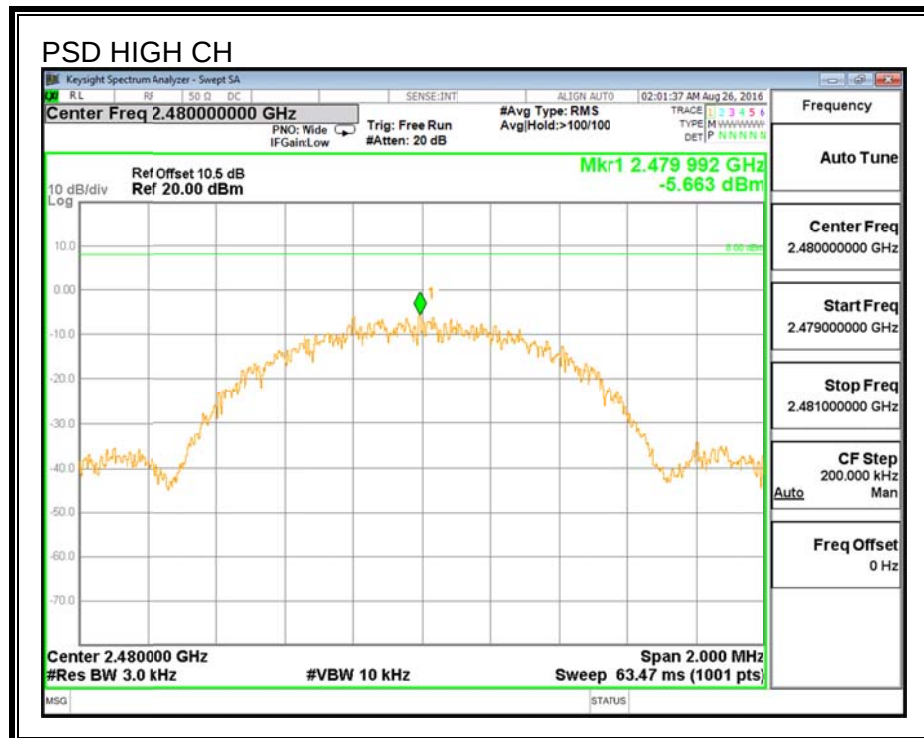

7.8. CONDUCTED SPURIOUS EMISSIONS

LIMITS



FCC §15.247 (d)

IC RSS-247 (5.5)



Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.

RESULTS



SPURIOUS EMISSIONS, LOW CHANNEL

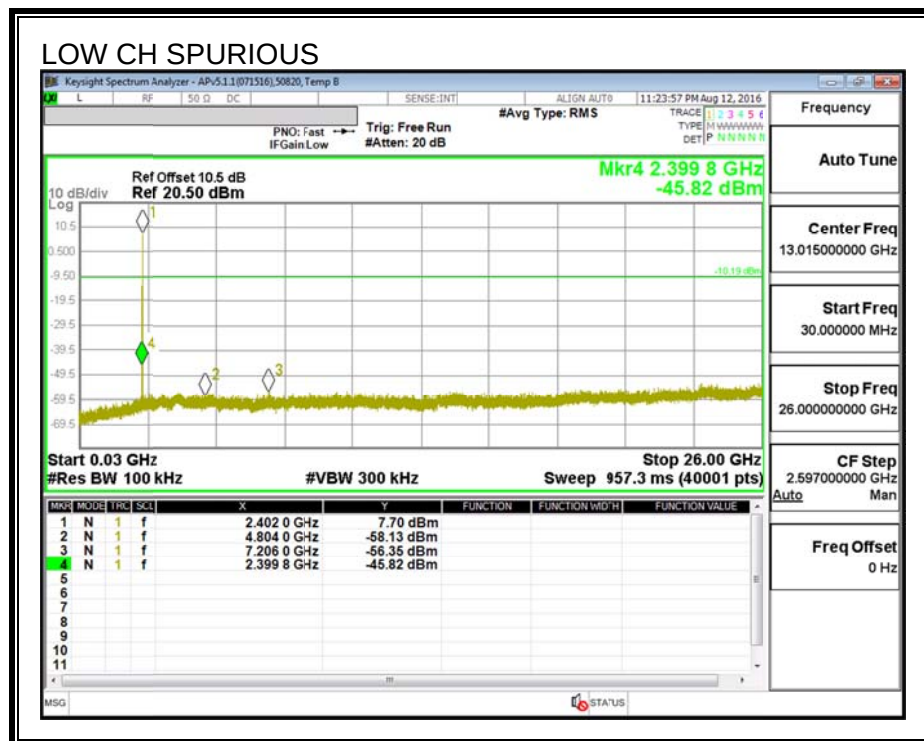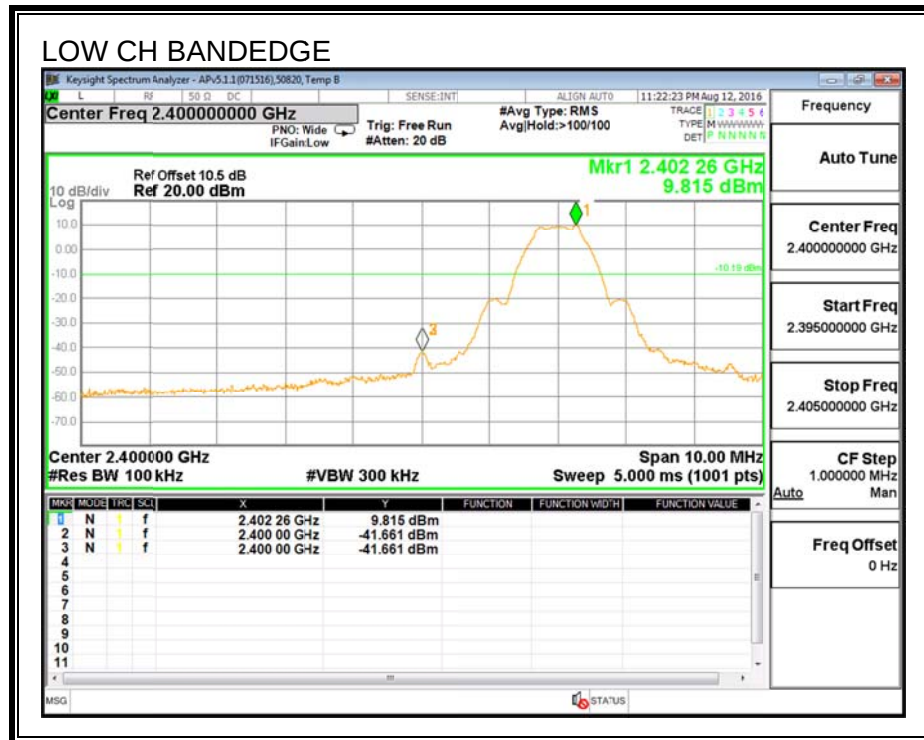

SPURIOUS EMISSIONS, MID CHANNEL

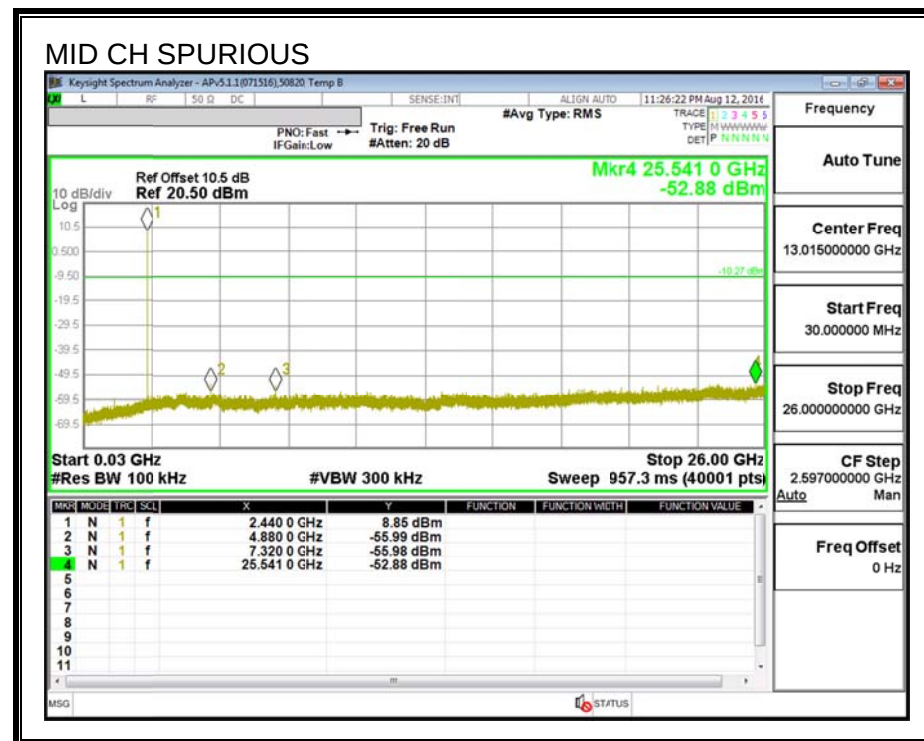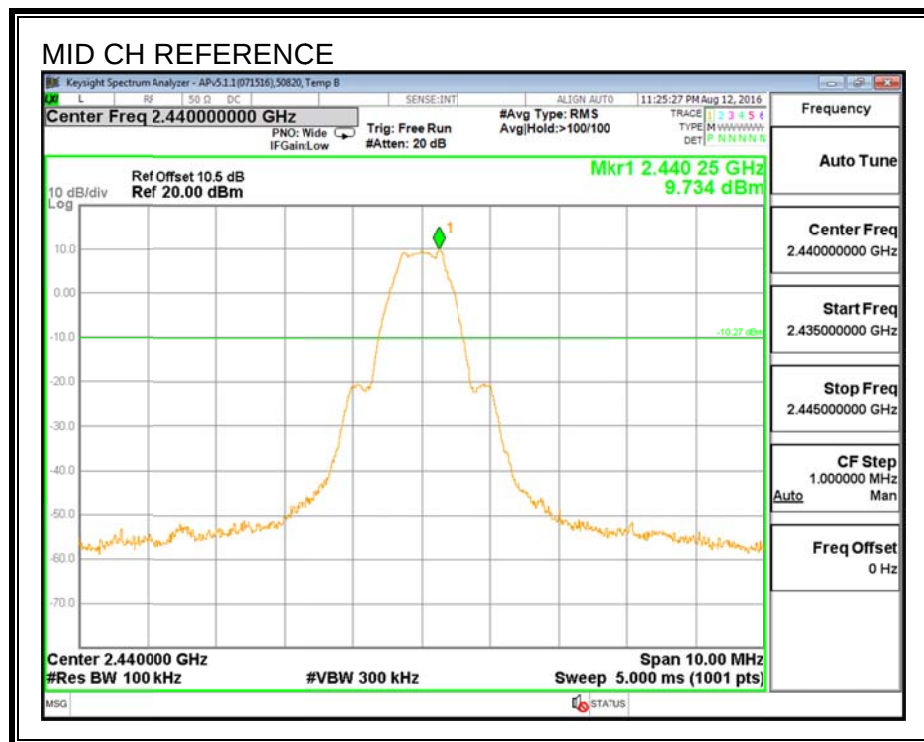

SPURIOUS EMISSIONS, HIGH CHANNEL

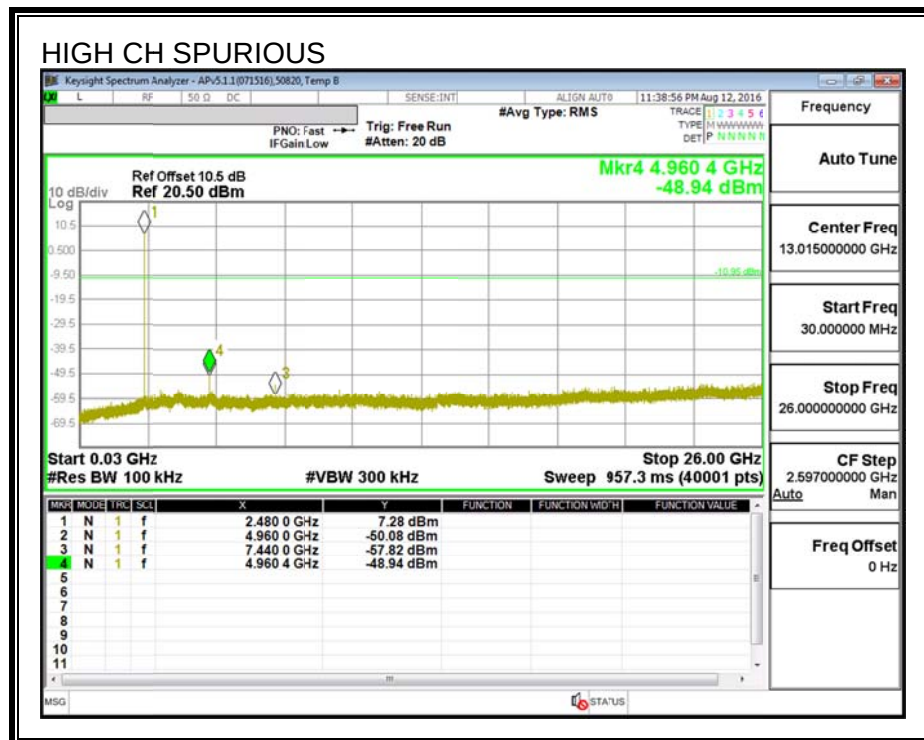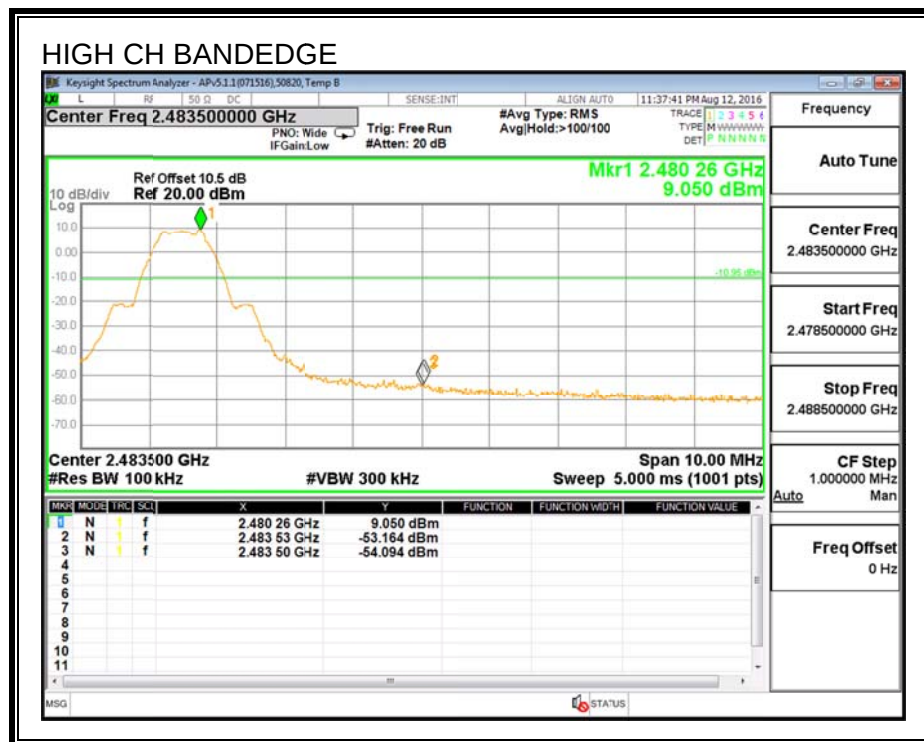

8. RADIATED TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-GEN, Section 8.9 and 8.10.

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For pre-scans above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 KHz for peak measurements.


For final measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and as applicable for average measurements.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

8.2. TRANSMITTER ABOVE 1 GHz

8.2.1. RESTRICTED BANDEDGE

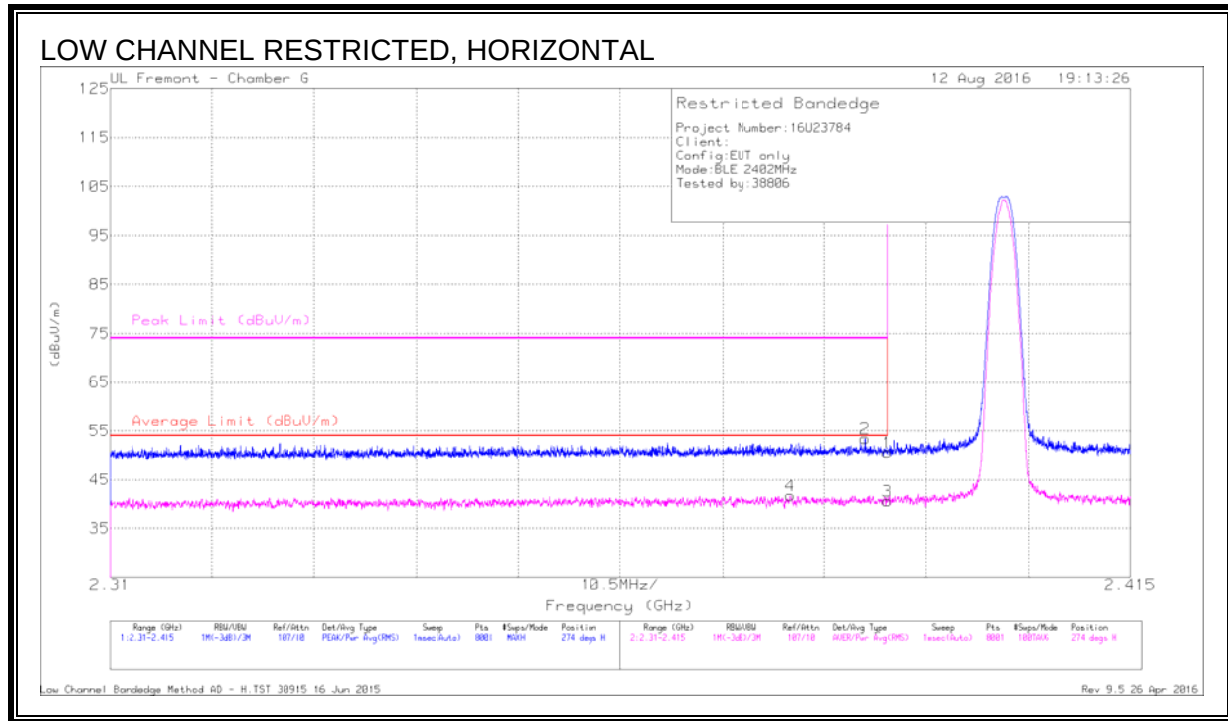


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	42.19	Pk	32.1	-23.7	50.59	-	-	74	-23.41	274	397	H
2	* 2.388	45.04	Pk	32.1	-23.7	53.44	-	-	74	-20.56	274	397	H
3	* 2.39	32.21	RMS	32.1	-23.7	40.61	54	-13.39	-	-	274	397	H
4	* 2.38	33.48	RMS	32	-23.7	41.78	54	-12.22	-	-	274	397	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

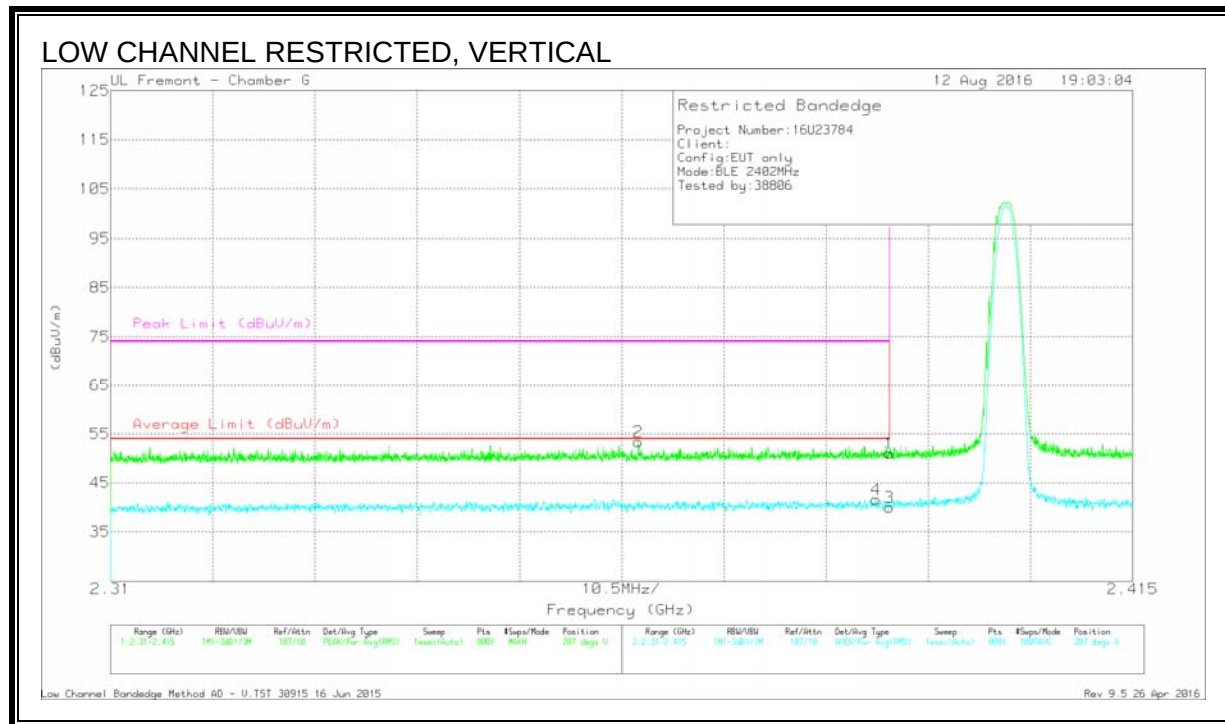


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl /Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	42.64	Pk	32.1	-23.7	51.04	-	-	74	-22.96	207	353	V
2	* 2.364	45.24	Pk	31.9	-23.8	53.34	-	-	74	-20.66	207	353	V
3	* 2.39	31.59	RMS	32.1	-23.7	39.99	54	-14.01	-	-	207	353	V
4	* 2.389	33.24	RMS	32.1	-23.7	41.64	54	-12.36	-	-	207	353	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

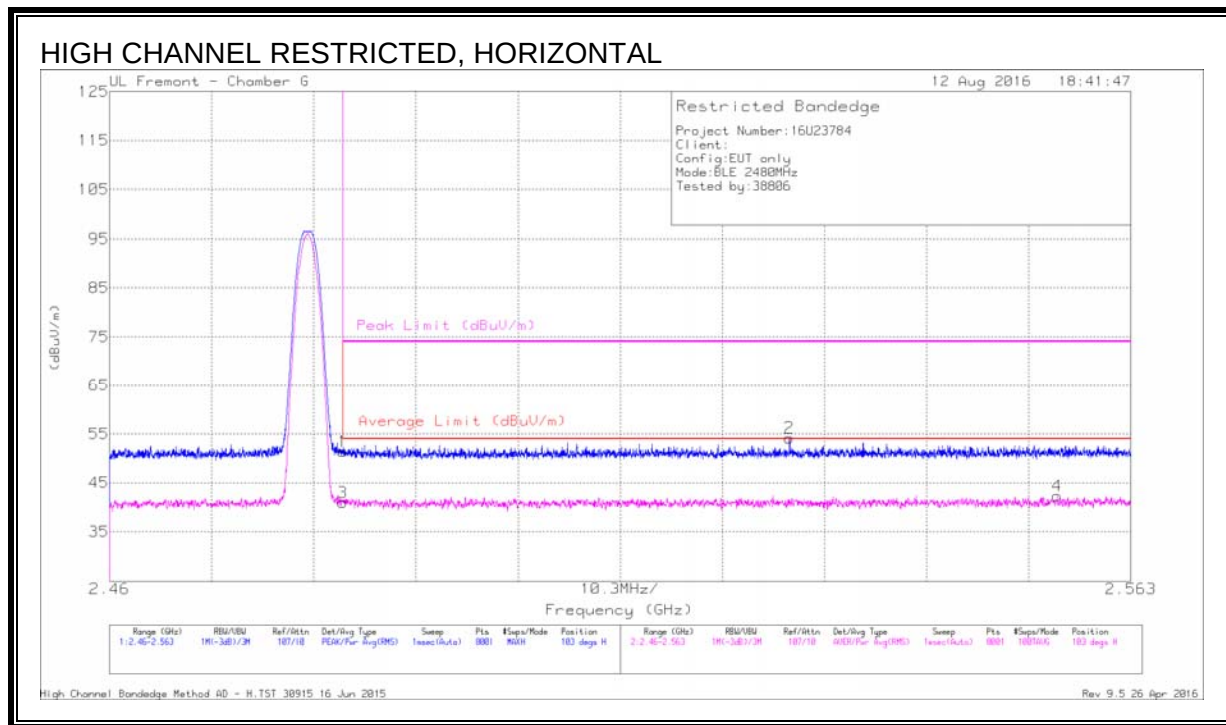


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	42.86	Pk	32.3	-23.7	51.46	-	-	74	-22.54	103	358	H
2	2.529	45.4	Pk	32.5	-23.7	54.2	-	-	74	-19.8	103	358	H
3	* 2.484	32.37	RMS	32.3	-23.7	40.97	54	-13.03	-	-	103	358	H
4	2.556	33.49	RMS	32.6	-23.7	42.39	54	-11.61	-	-	103	358	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

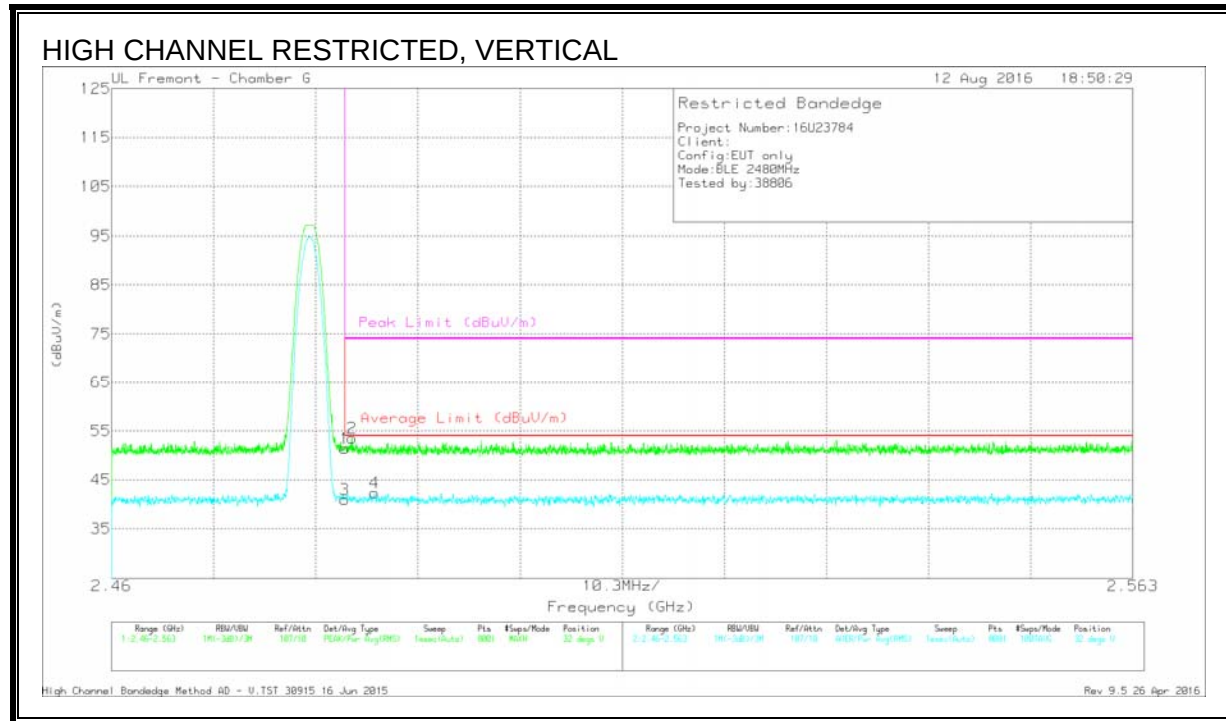

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	42.77	Pk	32.3	-23.7	51.37	-	-	74	-22.63	32	361	V
2	* 2.484	44.93	Pk	32.3	-23.7	53.53	-	-	74	-20.47	32	361	V
3	* 2.484	32.4	RMS	32.3	-23.7	41	54	-13	-	-	32	361	V
4	* 2.487	33.74	RMS	32.3	-23.7	42.34	54	-11.66	-	-	32	361	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

8.2.2. HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

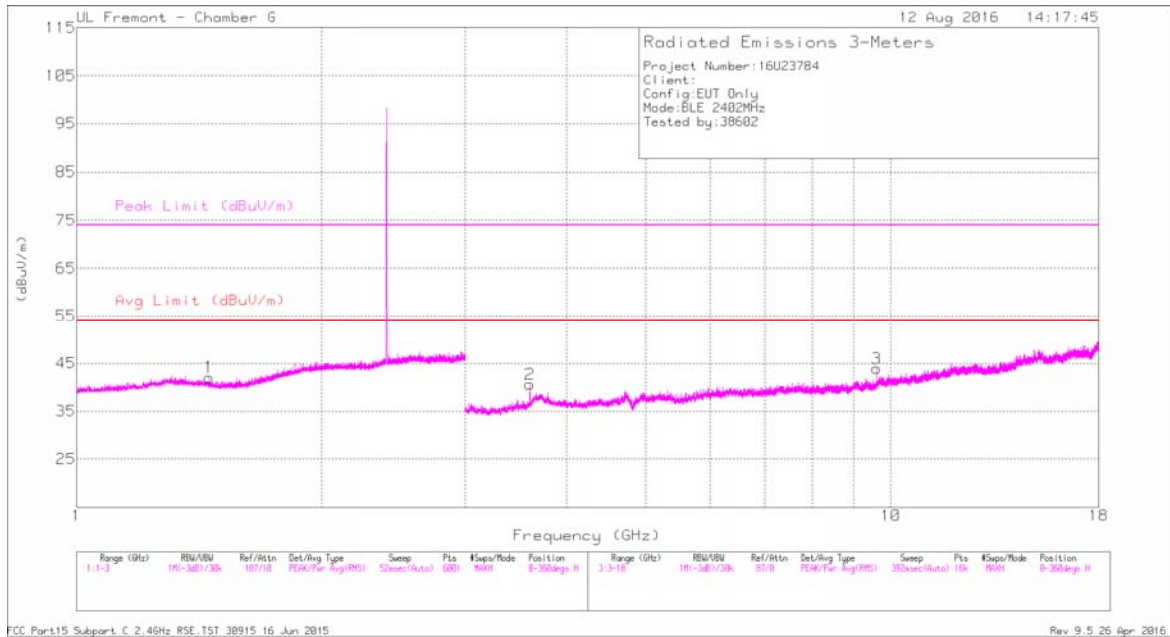

LOW CHANNEL VERTICAL

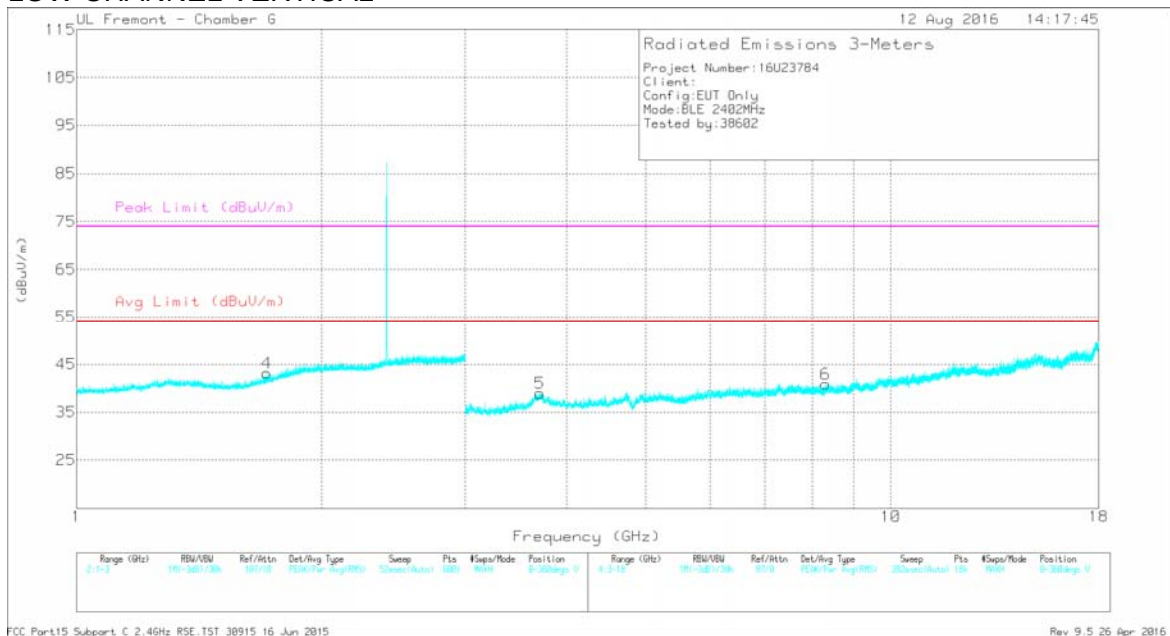



DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cb l/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.455	44.95	PK2	28.4	-24.6	48.75	-	-	74	-25.25	34	202	H
	* 1.454	33.64	MAv1	28.4	-24.6	37.44	54	-16.56	-	-	34	202	H
2	* 3.603	43.44	PK2	34	-32.3	45.14	-	-	74	-28.86	207	121	H
	* 3.603	34.98	MAv1	34	-32.3	36.68	54	-17.32	-	-	207	121	H
3	9.607	39.84	PK2	36.7	-27.6	48.94	-	-	-	-	94	126	H
	9.609	30.73	MAv1	36.7	-27.6	39.83	-	-	-	-	94	126	H
4	1.712	43.89	PK2	29.3	-24.3	48.89	-	-	-	-	193	205	V
	1.712	33.75	MAv1	29.3	-24.3	38.75	-	-	-	-	193	205	V
5	* 3.704	41.93	PK2	34.3	-30.7	45.53	-	-	74	-28.47	239	378	V
	* 3.705	31.83	MAv1	34.3	-30.7	35.43	54	-18.57	-	-	239	378	V
6	* 8.32	40.91	PK2	35.8	-29.4	47.31	-	-	74	-26.69	132	114	V
	* 8.32	30.54	MAv1	35.8	-29.4	36.94	54	-17.06	-	-	132	114	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

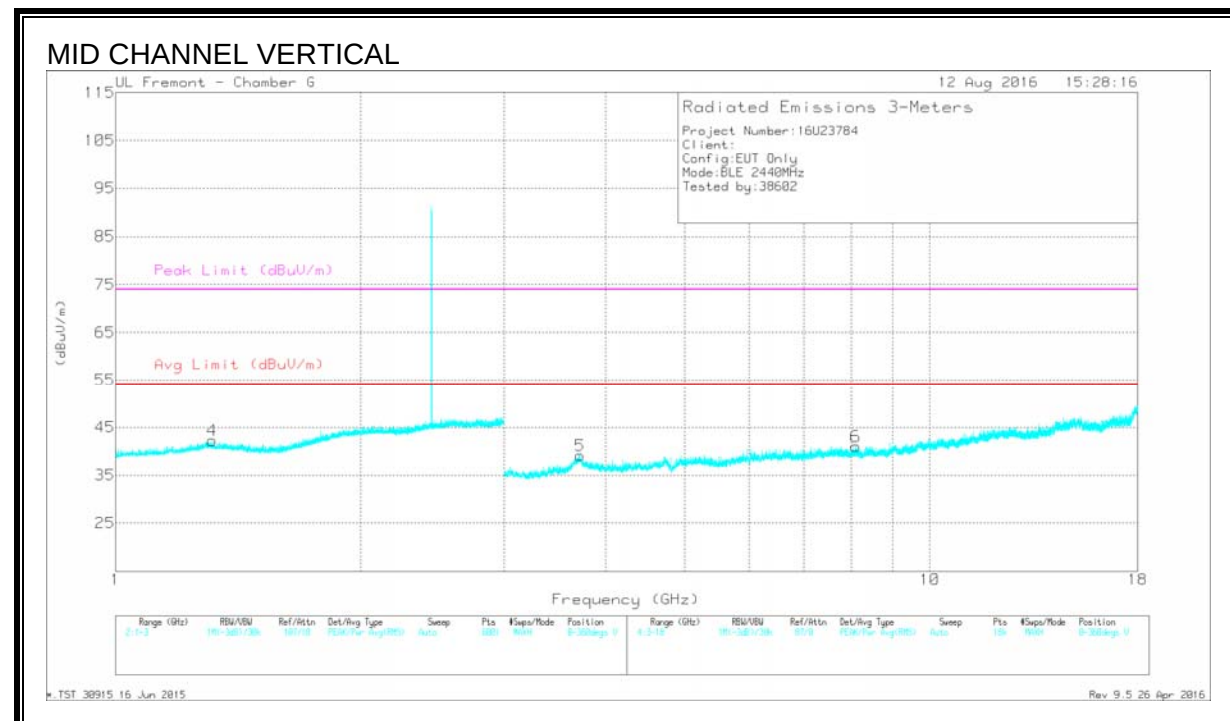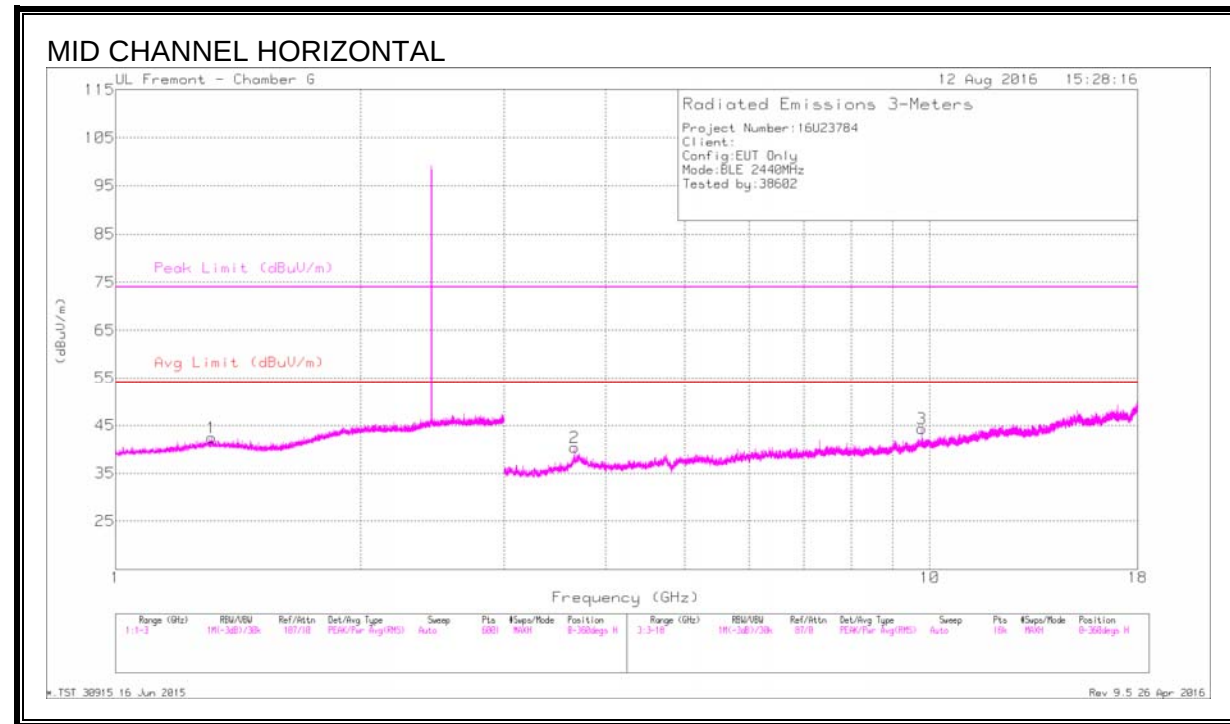

DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl /Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.311	44.11	PK2	29.2	-25	48.31	-	-	74	-25.69	37	183	H
	* 1.31	33.66	MAv1	29.2	-25	37.86	54	-16.14	-	-	37	183	H
2	* 3.661	42.2	PK2	34.2	-31.1	45.3	-	-	74	-28.7	211	118	H
	* 3.663	33.3	MAv1	34.2	-31.1	36.4	54	-17.6	-	-	211	118	H
3	9.767	40.57	PK2	36.9	-27.6	49.87	-	-	-	-	84	107	H
	9.767	31.64	MAv1	36.9	-27.6	40.94	-	-	-	-	84	107	H
4	* 1.316	44.32	PK2	29.2	-25	48.52	-	-	74	-25.48	175	196	V
	* 1.314	33.61	MAv1	29.2	-25	37.81	54	-16.19	-	-	175	196	V
5	* 3.717	41.05	PK2	34.2	-30.7	44.55	-	-	74	-29.45	252	393	V
	* 3.718	31.75	MAv1	34.2	-30.7	35.25	54	-18.75	-	-	252	393	V
6	* 8.112	39.93	PK2	35.8	-29	46.73	-	-	74	-27.27	126	113	V
	* 8.109	30.17	MAv1	35.8	-29.1	36.87	54	-17.13	-	-	126	113	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL HORIZONTAL

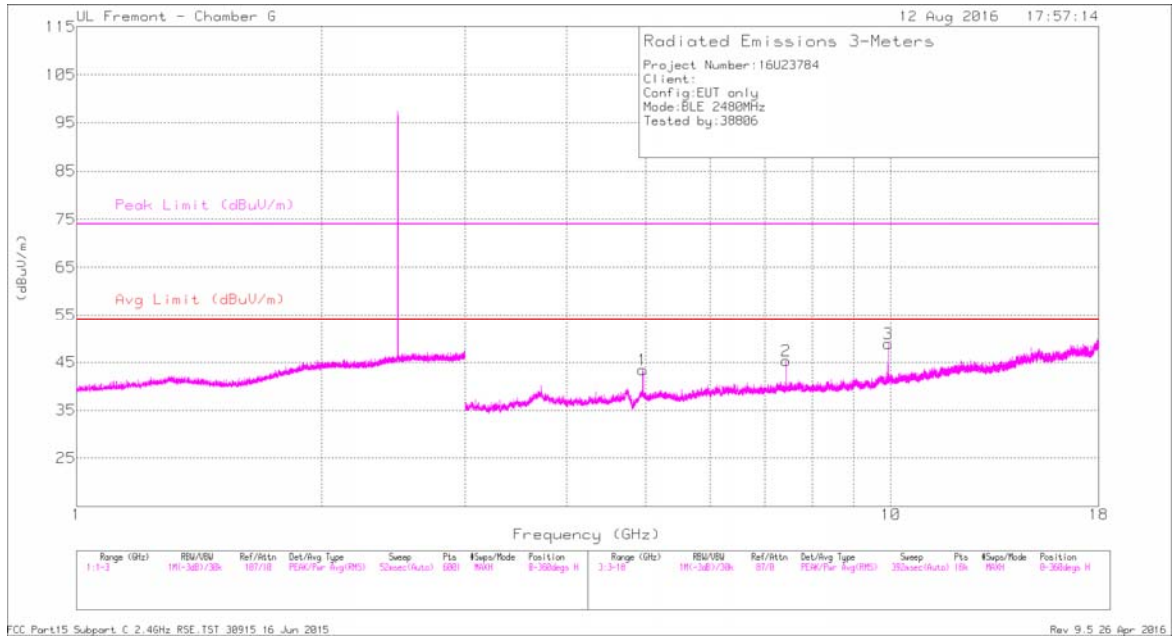

HIGH CHANNEL VERTICAL

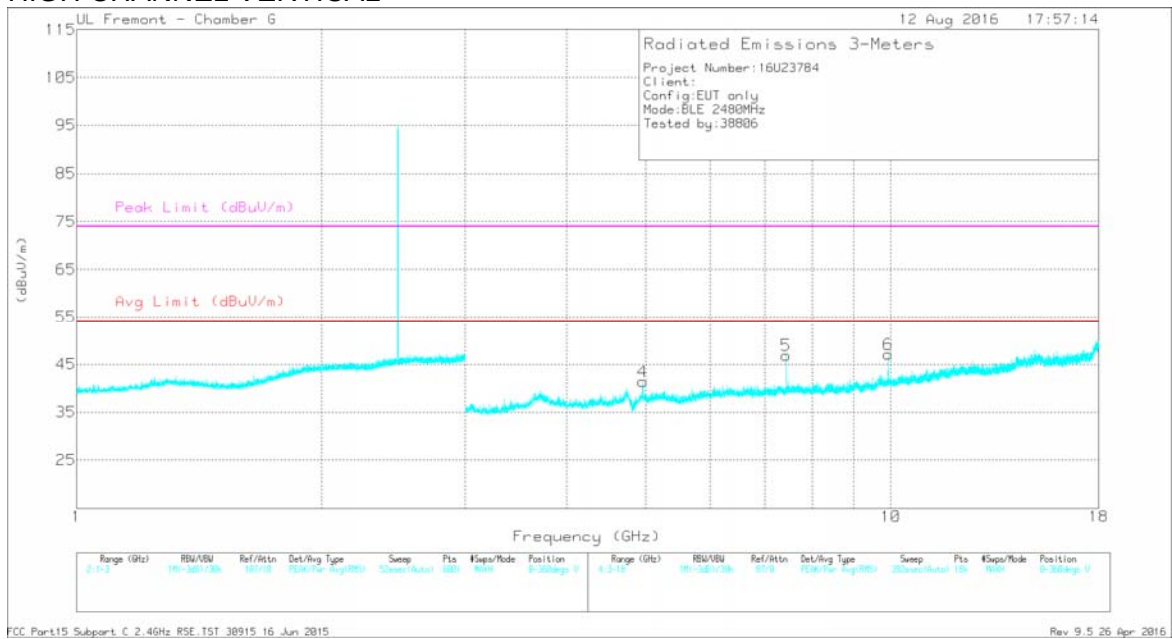

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl /Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.96	48.25	PK2	34.6	-31.8	51.05	-	-	74	-22.95	22	189	H
	* 4.96	39.74	MAv1	34.6	-31.8	42.54	54	-11.46	-	-	22	189	H
2	* 7.44	45.92	PK2	35.9	-30.2	51.62	-	-	74	-22.38	22	129	H
	* 7.439	38.18	MAv1	35.9	-30.2	43.88	54	-10.12	-	-	22	129	H
3	9.919	45.41	PK2	37.1	-27.1	55.41	-	-	-	-	35	135	H
	9.921	36.73	MAv1	37.1	-27.1	46.73	-	-	-	-	35	135	H
4	* 7.439	47.02	PK2	35.9	-30.2	52.72	-	-	74	-21.28	344	129	V
	* 7.439	38.39	MAv1	35.9	-30.2	44.09	54	-9.91	-	-	344	129	V
5	* 4.96	46.03	PK2	34.6	-31.8	48.83	-	-	74	-25.17	283	397	V
	* 4.96	36.94	MAv1	34.6	-31.8	39.74	54	-14.26	-	-	283	397	V
6	9.92	44.73	PK2	37.1	-27.1	54.73	-	-	-	-	76	150	V
	9.921	34.74	MAv1	37.1	-27.1	44.74	-	-	-	-	76	150	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

8.3. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

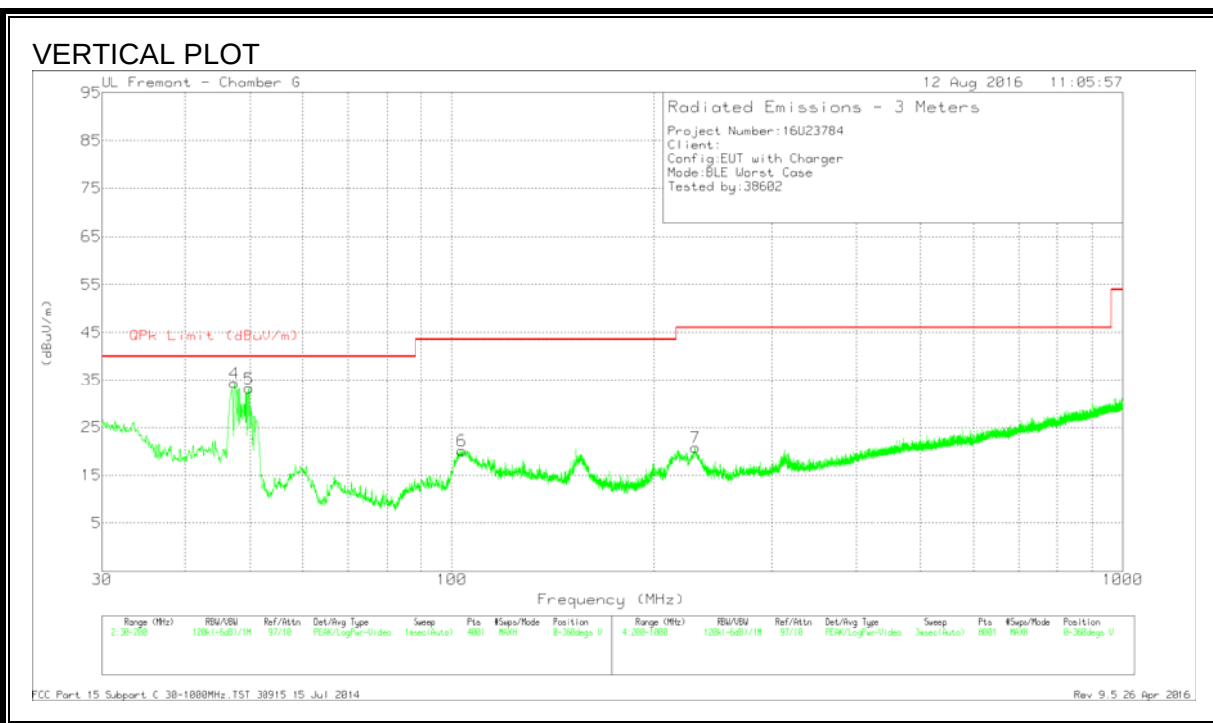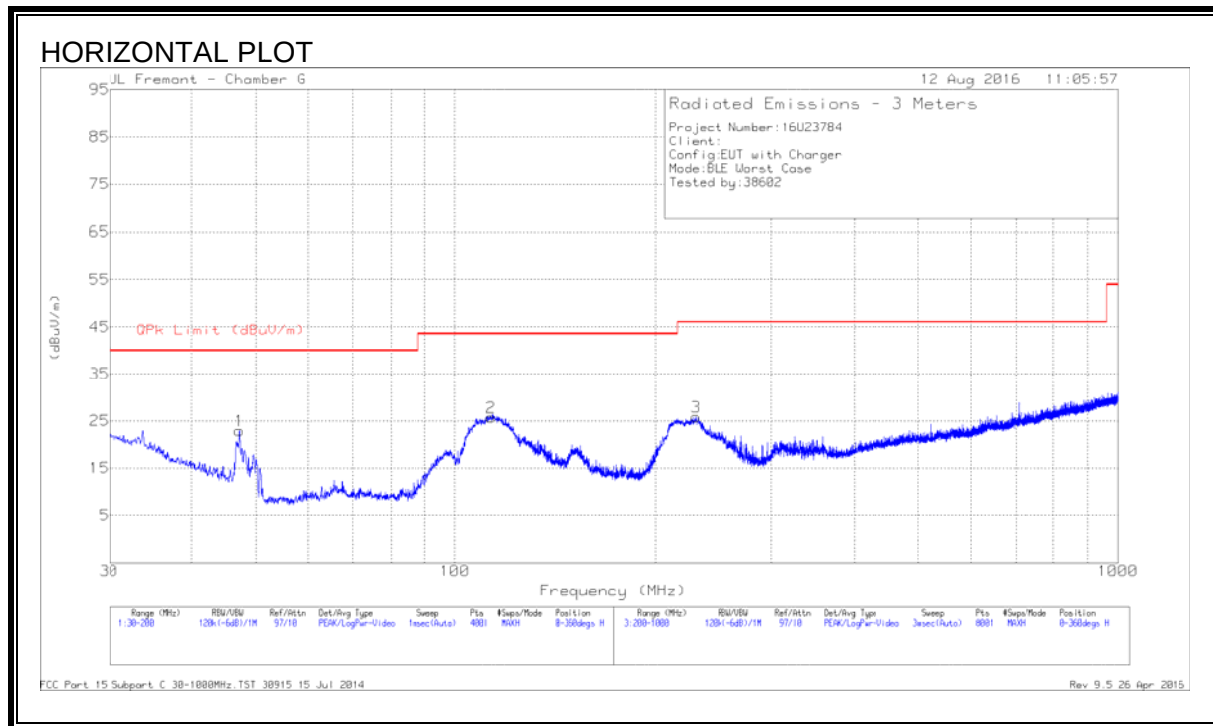

DATA



Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T900 (dB/m)	Amp Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	47.2125	40.9	Pk	13	-31	22.9	40	-17.1	0-360	300	H
2	* 113.3425	39.09	Pk	16.9	-30.3	25.69	43.52	-17.83	0-360	300	H
3	230.1	40.34	Pk	14.9	-29.4	25.84	46.02	-20.18	0-360	100	H
4	47.3825	52.45	Pk	12.9	-31	34.35	40	-5.65	0-360	100	V
5	49.7625	52.68	Pk	11.6	-31.1	33.18	40	-6.82	0-360	100	V
6	103.5675	35.41	Pk	15.1	-30.4	20.11	43.52	-23.41	0-360	100	V
7	230.5	35.31	Pk	14.9	-29.4	20.81	46.02	-25.21	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

8.4. WORST-CASE 18 to 26 GHz

SPURIOUS EMISSIONS 18 to 26 GHz (WORST-CASE CONFIGURATION)

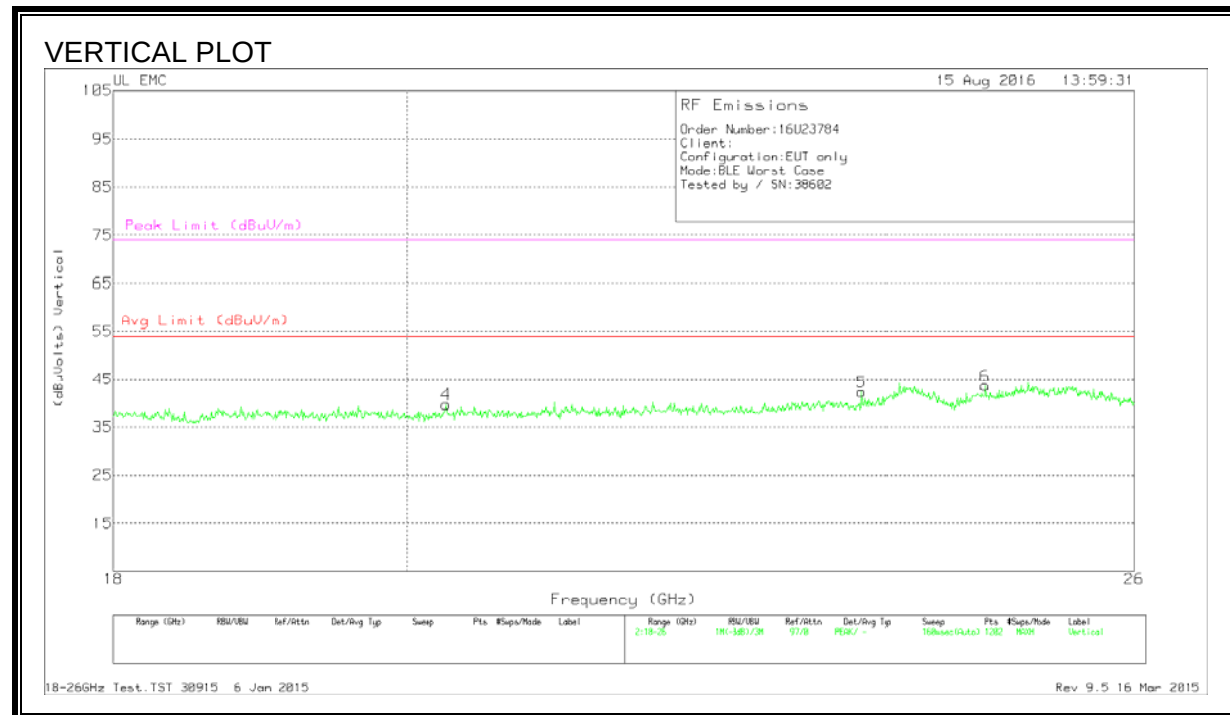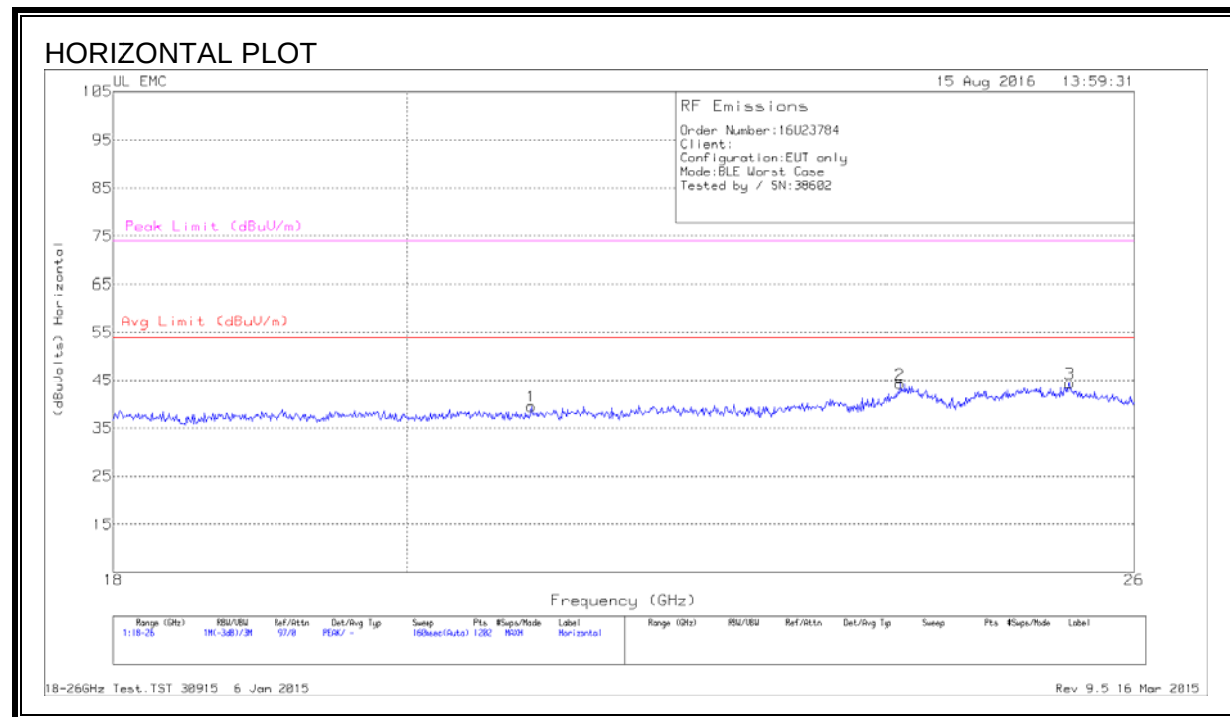

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T449 (dB/m)	Amp/Cbl (dB)	Dist Corr (dB)	Corrected Reading (dBuVolts)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)
1	20.918	41.1	Pk	33.1	-25.2	-9.5	39.5	54	-14.5	74	-34.5
2	23.902	43.57	Pk	34	-23.9	-9.5	44.16	54	-9.8	74	-29.8
3	25.407	43.93	Pk	34.3	-24.4	-9.5	44.3	54	-9.6	74	-29.6
4	20.291	41.57	Pk	32.8	-25.2	-9.5	39.6	54	-14.3	74	-34.3
5	23.555	42.73	Pk	33.8	-24.7	-9.5	42.3	54	-11.6	74	-31.6
6	24.641	43.37	Pk	34.1	-24.3	-9.5	43.6	54	-10.3	74	-30.3

Pk - Peak detector

9. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 8.8

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

Line-L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L1	LC Cables 1&3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR) Margin (dB)
1	.17025	47.99	Qp	0	0	10.1	58.09	64.95	-6.86	-	-
2	.17025	31.65	Ca	0	0	10.1	41.75	-	-	54.95	-13.2
3	.25575	43.65	Qp	0	0	10.1	53.75	61.57	-7.82	-	-
4	.258	27.52	Ca	0	0	10.1	37.62	-	-	51.5	-13.88
5	.34125	38.75	Qp	0	0	10.1	48.85	59.17	-10.32	-	-
6	.3435	22.88	Ca	0	0	10.1	32.98	-	-	49.12	-16.14
7	.76425	30.44	Qp	0	0	10.1	40.54	56	-15.46	-	-
8	.7665	20.77	Ca	0	0	10.1	30.87	-	-	46	-15.13
9	2.78925	21.85	Qp	0	.1	10.1	32.05	56	-23.95	-	-
10	2.78925	15.5	Ca	0	.1	10.1	25.7	-	-	46	-20.3
11	18.51675	20.96	Qp	0	.2	10.3	31.46	60	-28.54	-	-
12	18.49425	14.14	Ca	0	.2	10.3	24.64	-	-	50	-25.36

Qp - Quasi-Peak detector

Ca - CISPR average detection


Line-L2 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L2	LC Cables 2&3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR) Margin (dB)
13	.17025	47.73	Qp	0	0	10.1	57.83	64.95	-7.12	-	-
14	.17025	30.99	Ca	0	0	10.1	41.09	-	-	54.95	-13.86
15	.2535	42.98	Qp	0	0	10.1	53.08	61.64	-8.56	-	-
16	.25575	25.67	Ca	0	0	10.1	35.77	-	-	51.57	-15.8
17	.339	37.35	Qp	0	0	10.1	47.45	59.23	-11.78	-	-
18	.34125	19.54	Ca	0	0	10.1	29.64	-	-	49.17	-19.53
19	.762	29.99	Qp	0	0	10.1	40.09	56	-15.91	-	-
20	.762	15.76	Ca	0	0	10.1	25.86	-	-	46	-20.14
21	2.81175	18.54	Qp	0	.1	10.1	28.74	56	-27.26	-	-
22	2.80725	12.12	Ca	0	.1	10.1	22.32	-	-	46	-23.68
23	18.62475	16.77	Qp	0	.2	10.3	27.27	60	-32.73	-	-
24	18.63375	9.41	Ca	0	.2	10.3	19.91	-	-	50	-30.09

Qp - Quasi-Peak detector

Ca - CISPR average detection

LINE 1 RESULTS

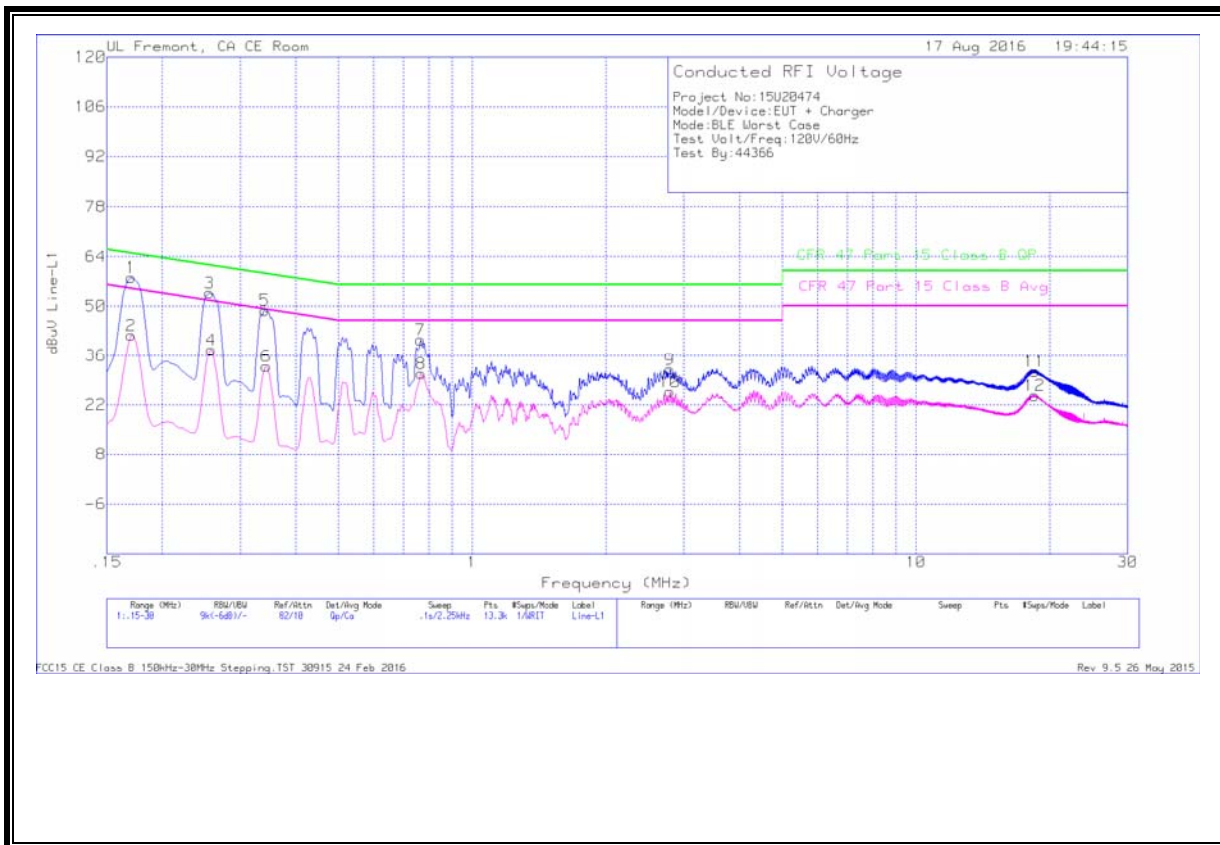

LINE 2 RESULTS

