

APPENDIX A: SAR TEST PLOTS

ELEMENT

DUT: BCG-A3001; Type: Watch; Serial: N717C

Communication System: UID:10011 - CAC, WCDMA; MAIA: Y; Frequency: 836.6 MHz

Medium: 835 Head; Medium parameters used:

f = 836.6 MHz; cond = 0.904 S/m; perm = 41.0; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 06/24/2024; Ambient Temp: 21.5°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN7668; ConvF:(9.05,9.05,9.05); Calibrated: 2023-08-10

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1681; Calibrated: 2023-09-12

Phantom: Twin-SAM V5.0; Serial: 1692

Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: UMTS 850, Exp: Head| Front Side, Ch. Mid,
Titanium, Metal Loop Wristband**

Area Scan (90.0 x 90.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.00 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.010 W/kg

SAR(1 g) = 0.005 W/kg

Smallest distance from peaks to all points 3 dB below is 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 80.4 %

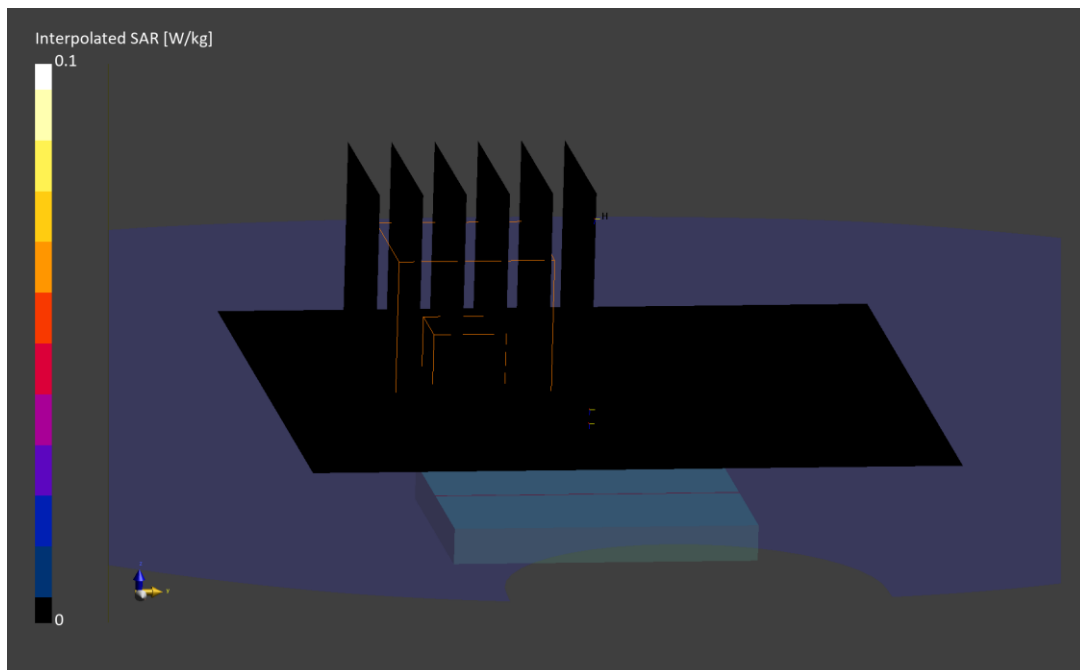

ELEMENT

DUT: BCG-A3001; Type: Watch; Serial: 4XX4J

Communication System: UID:10011 - CAC, WCDMA; MAIA: Y; Frequency: 1732.4 MHz

Medium: 1750 Head; Medium parameters used:

f = 1732.4 MHz; cond = 1.35 S/m; perm = 38.5; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 07/03/2024; Ambient Temp: 20.3°C; Tissue Temp: 19.5°C

Probe: EX3DV4 - SN7546; ConvF:(8.34,7.55,8.26); Calibrated: 2024-04-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1402; Calibrated: 2024-04-10

Phantom: Twin-SAM V8.0; Serial: 2029

Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: UMTS 1750, Exp: Head| Front Side, Ch. Mid,
Aluminum, Metal Links Wristband**

Area Scan (90.0 x 90.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.14 W/kg; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.252 W/kg

SAR(1 g) = 0.150 W/kg

Smallest distance from peaks to all points 3 dB below is 13.6 mm

Ratio of SAR at M2 to SAR at M1 = 82.7 %

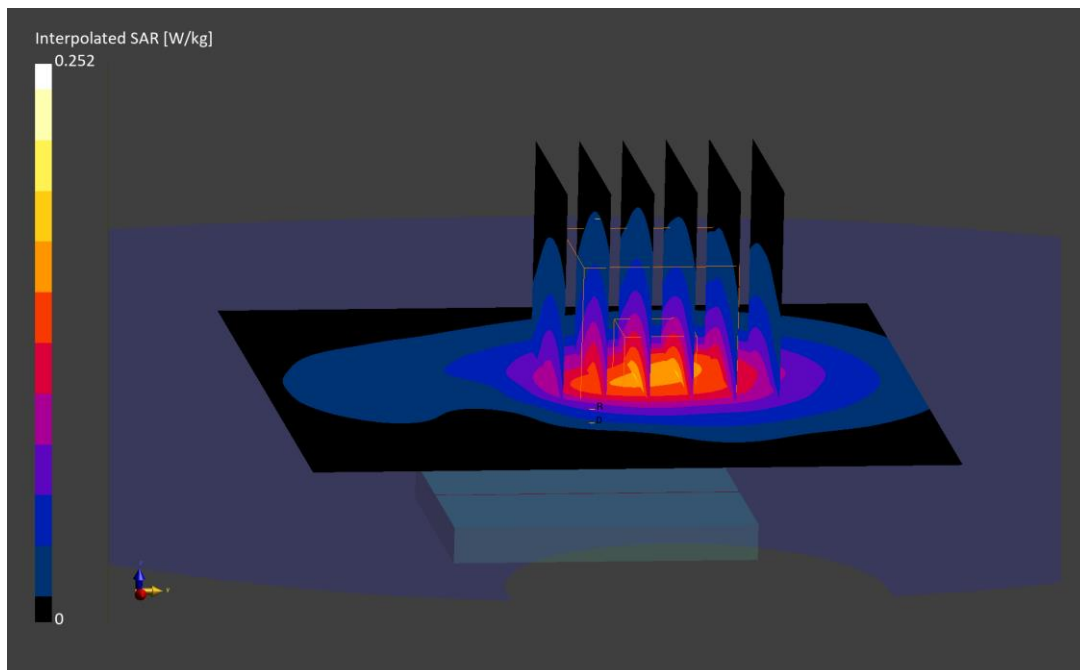

ELEMENT

DUT: BCG-A3001; Type: Watch; Serial: 3M74J

Communication System: UID:10011 - CAC, WCDMA; MAIA: Y; Frequency: 1907.6 MHz

Medium: 1900 Head; Medium parameters used:

f = 1907.6 MHz; cond = 1.46 S/m; perm = 40.9; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 07/03/2024; Ambient Temp: 23.6°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN7668; ConvF:(8.0,8.0,8.0); Calibrated: 2023-08-10

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1681; Calibrated: 2023-09-12

Phantom: Twin-SAM V5.0; Serial: 1692

Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: UMTS 1900, Exp: Head| Front Side, Ch. High,
Aluminum, Metal Links Wristband**

Area Scan (90.0 x 90.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.12 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.286 W/kg

SAR(1 g) = 0.155 W/kg

Smallest distance from peaks to all points 3 dB below is 12.4 mm

Ratio of SAR at M2 to SAR at M1 = 81.3 %

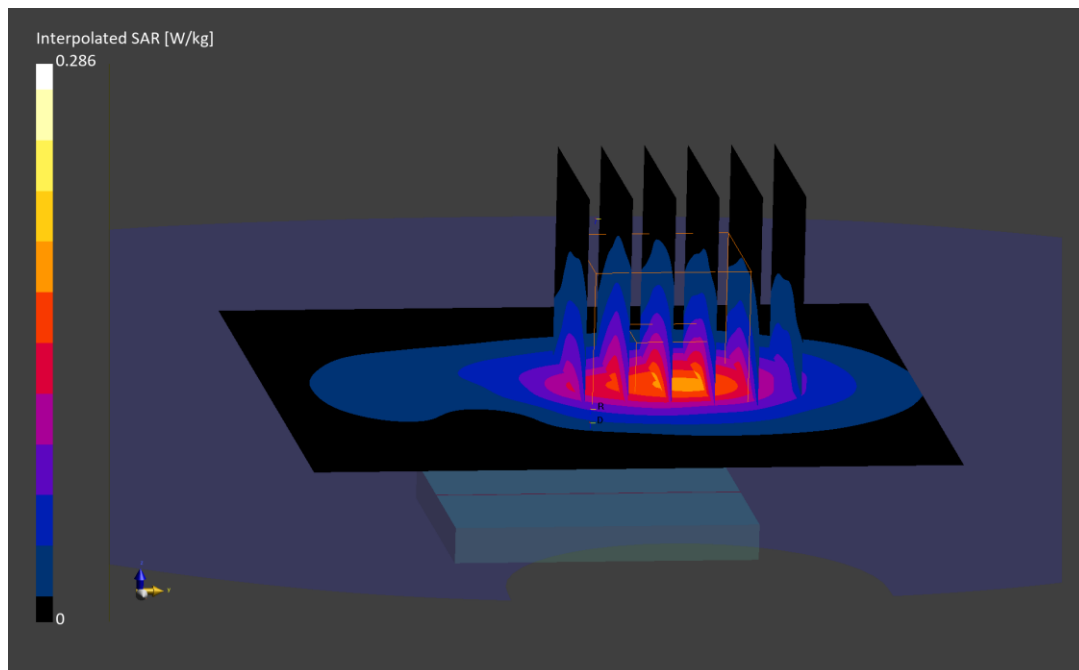

ELEMENT

DUT: BCG-A3001; Type: Watch; Serial: 26NRF

Communication System: UID:10175 - CAG, LTE-FDD; MAIA: Y; Frequency: 707.5 MHz
Medium: 750 Head; Medium parameters used:
f = 707.5 MHz; cond = 0.868 S/m; perm = 43.2; density = 1000 kg/m³
Phantom Section: Flat; Space: 10.00 mm

Test Date: 06/14/2024; Ambient Temp: 21.6°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN3949; ConvF:(10.55,10.55,10.55); Calibrated: 2023-10-02
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1684; Calibrated: 2023-09-12
Phantom: Twin-SAM V8.0; Serial: 1736
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: LTE Band 12, Exp: Head| Front Side, Ch. Mid,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset,
Aluminum, Metal Links Wristband**

Area Scan (90.0 x 90.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.00 W/kg; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.005 W/kg

SAR(1 g) = 0.003 W/kg

Smallest distance from peaks to all points 3 dB below is 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 92.9 %

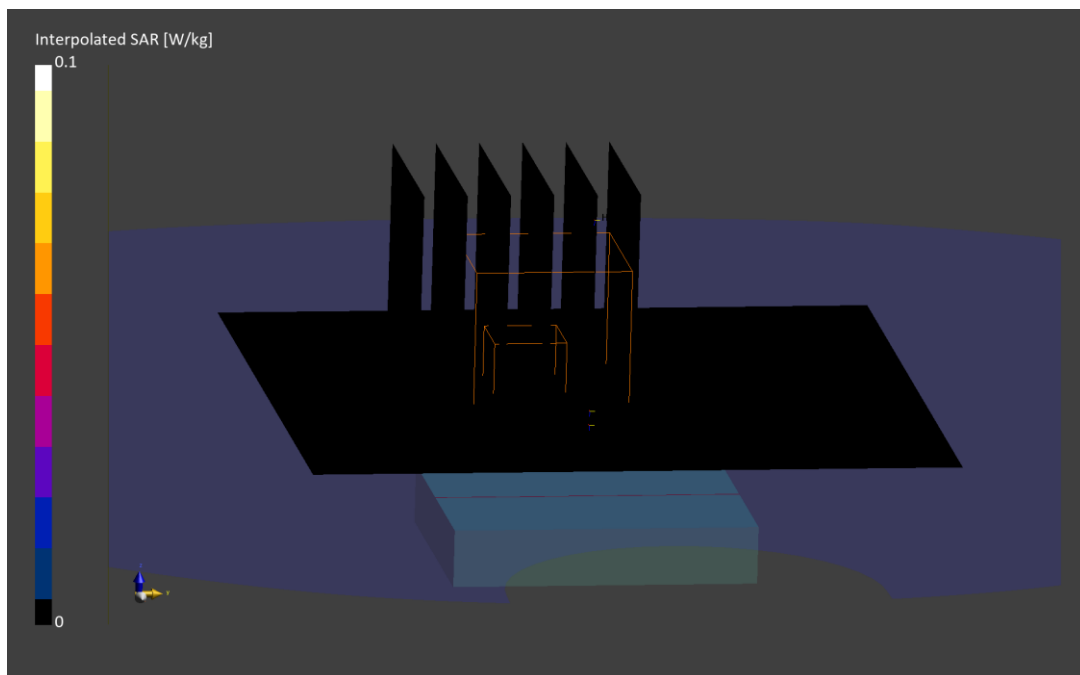

ELEMENT

DUT: BCG-A3001; Type: Watch; Serial: XH7NF

Communication System: UID:10175 - CAG, LTE-FDD; MAIA: Y; Frequency: 782.0 MHz
Medium: 750 Head; Medium parameters used:
f = 782.0 MHz; cond = 0.922 S/m; perm = 41.5; density = 1000 kg/m³
Phantom Section: Flat; Space: 10.00 mm

Test Date: 06/17/2024; Ambient Temp: 21.5°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN3949; ConvF:(10.55,10.55,10.55); Calibrated: 2023-10-02
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1684; Calibrated: 2023-09-12
Phantom: Twin-SAM V8.0; Serial: 1736
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: LTE Band 13, Exp: Head| Front Side, Ch. Mid,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset,
Titanium, Metal Loop Wristband**

Area Scan (90.0 x 90.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.00 W/kg; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.010 W/kg

SAR(1 g) = 0.005 W/kg

Smallest distance from peaks to all points 3 dB below is 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 82.9 %

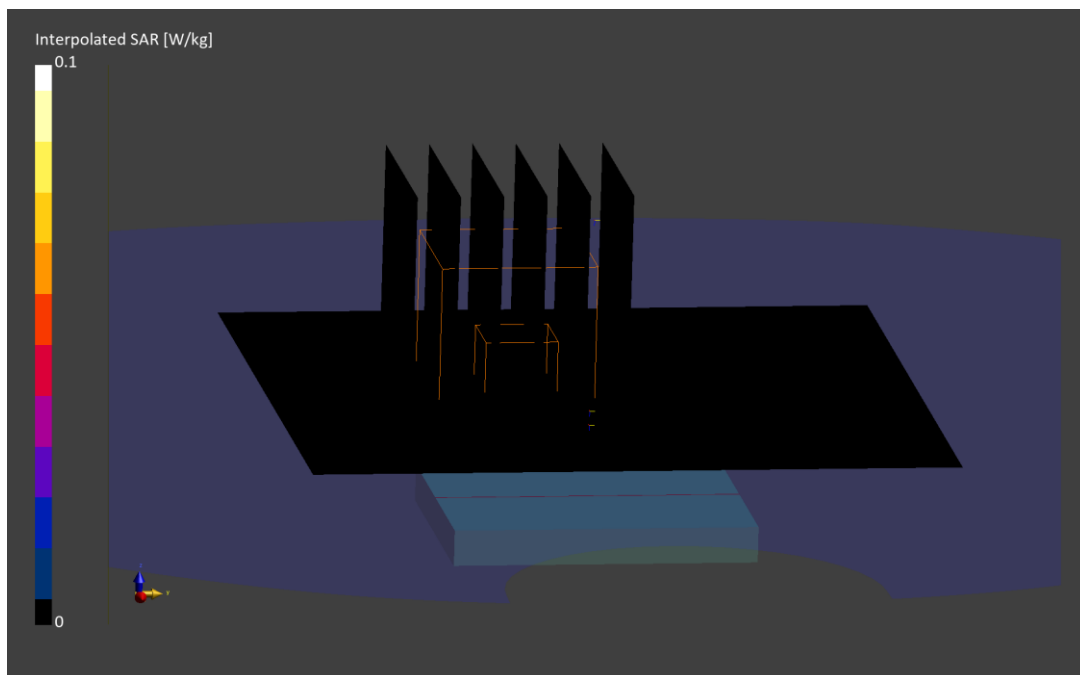

ELEMENT

DUT: BCG-A3001; Type: Watch; Serial: XH7NF

Communication System: UID:10175 - CAG, LTE-FDD; MAIA: Y; Frequency: 793.0 MHz
Medium: 750 Head; Medium parameters used:
f = 793.0 MHz; cond = 0.936 S/m; perm = 40.3; density = 1000 kg/m³
Phantom Section: Flat; Space: 10.00 mm

Test Date: 06/18/2024; Ambient Temp: 21.5°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN3949; ConvF:(10.55,10.55,10.55); Calibrated: 2023-10-02
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1684; Calibrated: 2023-09-12
Phantom: Twin-SAM V8.0; Serial: 1736
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: LTE Band 14, Exp: Head| Front Side, Ch. Mid,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset
Titanium, Metal Loop Wristband**

Area Scan (90.0 x 90.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.00 W/kg; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.01 W/kg

SAR(1 g) = 0.005 W/kg

Smallest distance from peaks to all points 3 dB below is 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 82.0 %

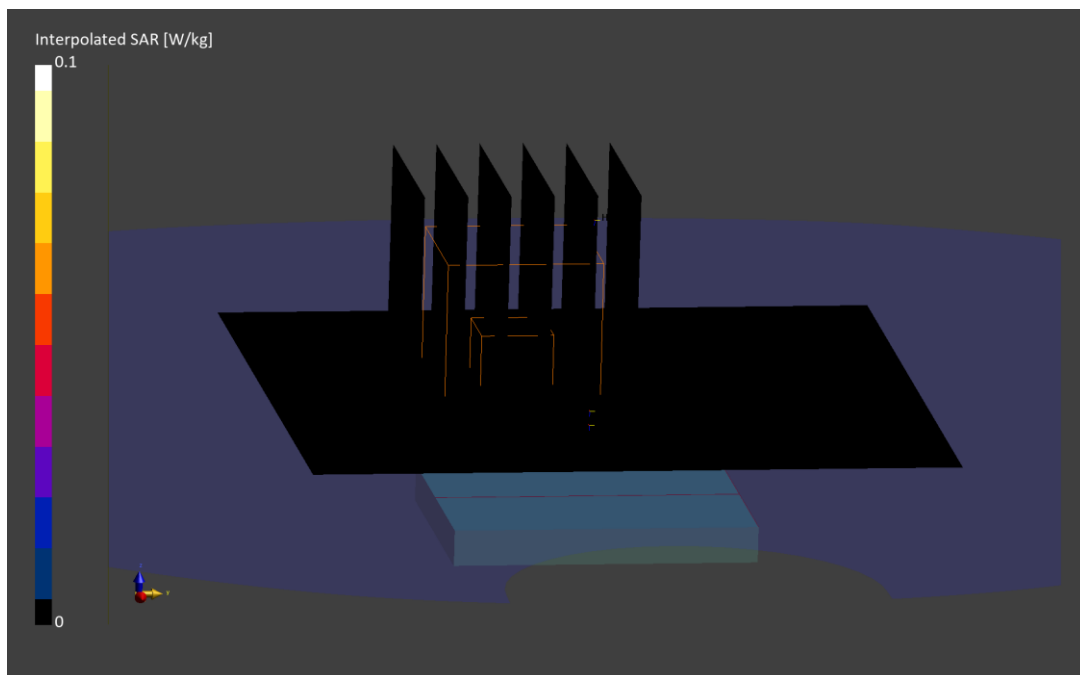

ELEMENT

DUT: BCG-A3001; Type: Watch; Serial: C52WP

Communication System: UID:10175 - CAH, LTE-FDD; MAIA: Y; Frequency: 831.5 MHz
Medium: 835 Head; Medium parameters used:
f = 831.5 MHz; cond = 0.906 S/m; perm = 40.8; density = 1000 kg/m³
Phantom Section: Flat; Space: 10.00 mm

Test Date: 06/26/2024; Ambient Temp: 22.3°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7668; ConvF:(9.05,9.05,9.05); Calibrated: 2023-08-10
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1681; Calibrated: 2023-09-12
Phantom: Twin-SAM V5.0; Serial: 1692
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: LTE Band 26, Exp: Head| Front Side, Ch. Mid,
10 MHz Bandwidth, QPSK, 1 RB, 49 RB Offset,
Titanium, Metal Links Wristband**

Area Scan (90.0 x 90.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (36.0 x 36.0 x 30.0): Measurement grid: dx=4.5 mm, dy=4.5 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.00 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.012 W/kg

SAR(1 g) = 0.006 W/kg

Smallest distance from peaks to all points 3 dB below is 6.3 mm

Ratio of SAR at M2 to SAR at M1 = 85.7 %

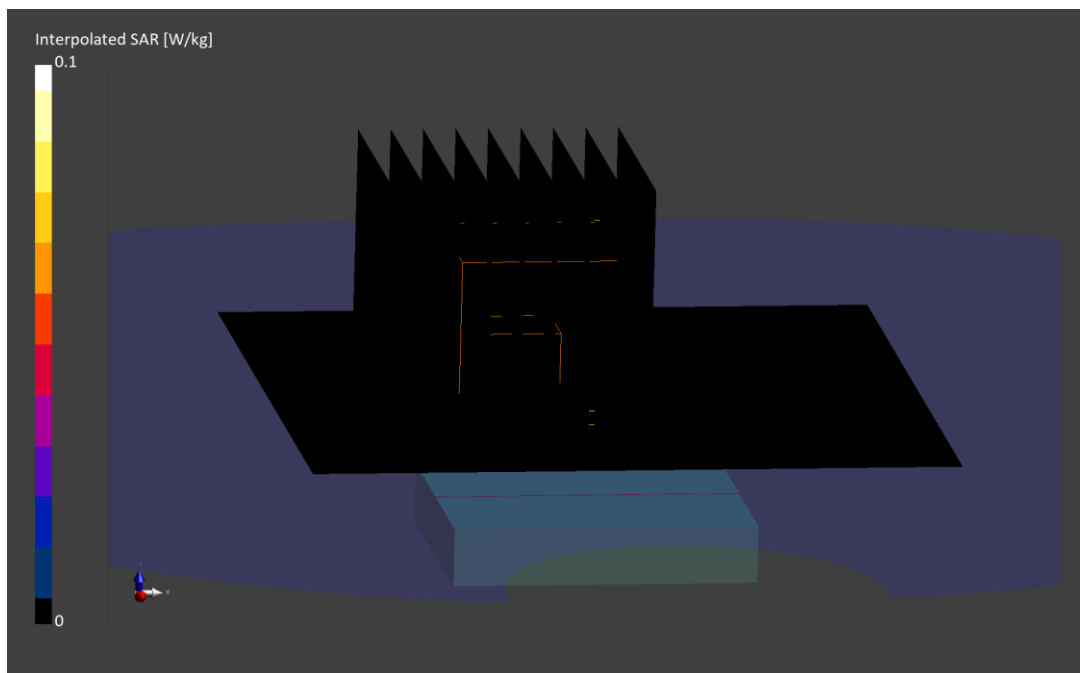

ELEMENT

DUT: BCG-A3001; Type: Watch; Serial: C52WP

Communication System: UID:10175 - CAH, LTE-FDD; MAIA: Y; Frequency: 836.5 MHz

Medium: 835 Head; Medium parameters used:

f = 836.5 MHz; cond = 0.912 S/m; perm = 40.8; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 06/26/2024; Ambient Temp: 22.3°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7668; ConvF:(9.05,9.05,9.05); Calibrated: 2023-08-10

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1681; Calibrated: 2023-09-12

Phantom: Twin-SAM V5.0; Serial: 1692

Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: LTE Band 5, Exp: Head| Front Side, Ch. Mid,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset,
Titanium, Metal Loop Wristband**

Area Scan (90.0 x 90.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (36.0 x 36.0 x 30.0): Measurement grid: dx=4.5 mm, dy=4.5 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.00 W/kg; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.012 W/kg

SAR(1 g) = 0.006 W/kg

Smallest distance from peaks to all points 3 dB below is 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 81.7 %

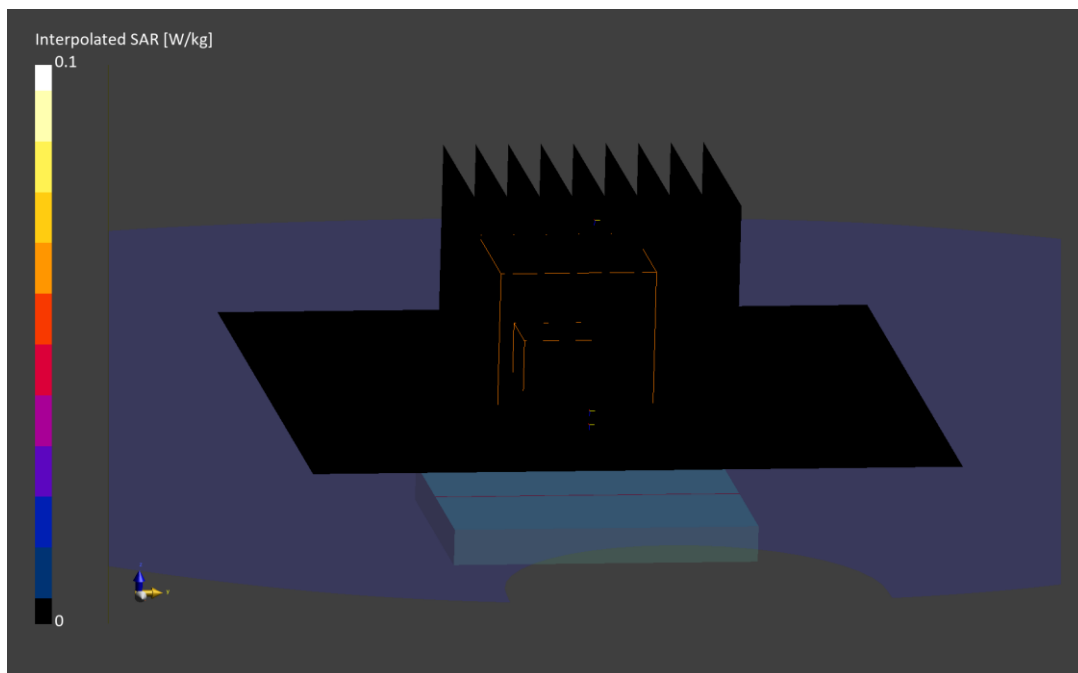

ELEMENT

DUT: BCG-A3001; Type: Watch; Serial: Q2JH7

Communication System: UID:10169 - CAF, LTE-FDD; MAIA: Y; Frequency: 1720.0 MHz
Medium: 1750 Head; Medium parameters used:
f = 1720.0 MHz; cond = 1.34 S/m; perm = 38.6; density = 1000 kg/m³
Phantom Section: Flat; Space: 10.00 mm

Test Date: 07/03/2024; Ambient Temp: 20.3°C; Tissue Temp: 19.5°C

Probe: EX3DV4 - SN7546; ConvF:(8.34,7.55,8.26); Calibrated: 2024-04-16
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1402; Calibrated: 2024-04-10
Phantom: Twin-SAM V8.0; Serial: 2029
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: LTE Band 66, Exp: Head| Front Side, Ch. Low,
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset,
Aluminum, Metal Loop Wristband**

Area Scan (90.0 x 90.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.17 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.318 W/kg

SAR(1 g) = 0.185 W/kg

Smallest distance from peaks to all points 3 dB below is 13.0 mm

Ratio of SAR at M2 to SAR at M1 = 82.8 %

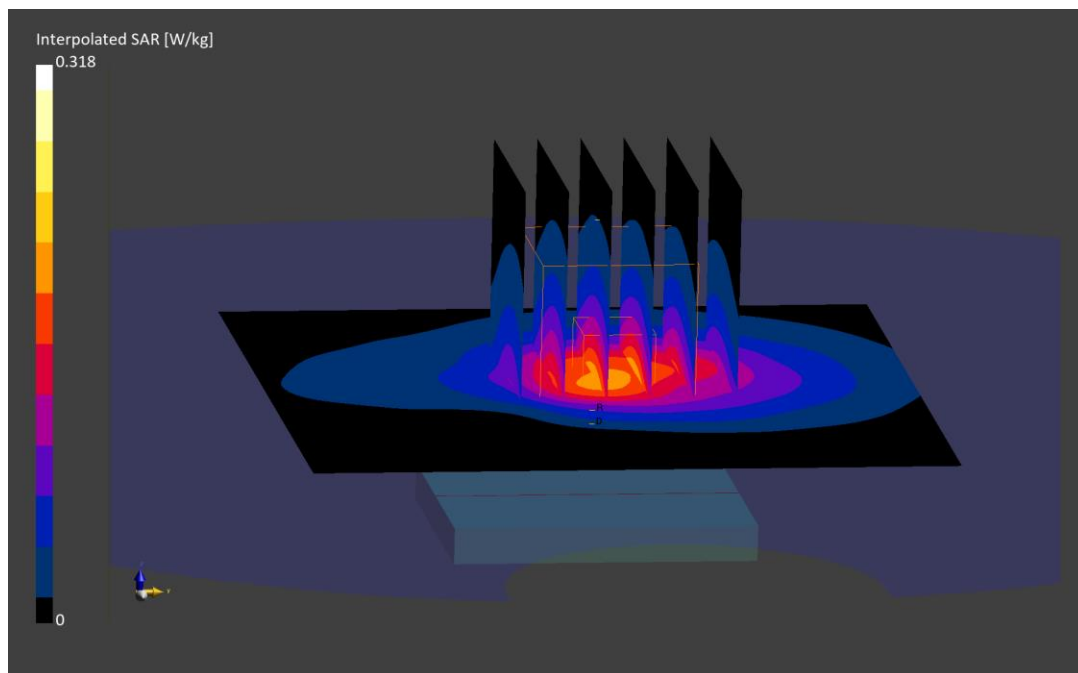

ELEMENT

DUT: BCG-A3001; Type: Watch; Serial: 3M74J

Communication System: UID:10169 - CAF, LTE-FDD; MAIA: Y; Frequency: 1905.0 MHz

Medium: 1900 Head; Medium parameters used:

$f = 1905.0$ MHz; $\text{cond} = 1.44$ S/m; $\text{perm} = 38.5$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 07/03/2024; Ambient Temp: 22.7°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7639; ConvF:(8.53,8.53,8.53); Calibrated: 2023-11-09

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1403; Calibrated: 2023-11-14

Phantom: Twin-SAM V8.0; Serial: 2034

Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: LTE Band 25, Exp: Head| Front Side, Ch. High,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset,
Aluminum, Metal Loop Wristband**

Area Scan (90.0 x 90.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.20 W/kg; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.317 W/kg

SAR(1 g) = 0.190 W/kg

Smallest distance from peaks to all points 3 dB below is 15.4 mm

Ratio of SAR at M2 to SAR at M1 = 84.2 %

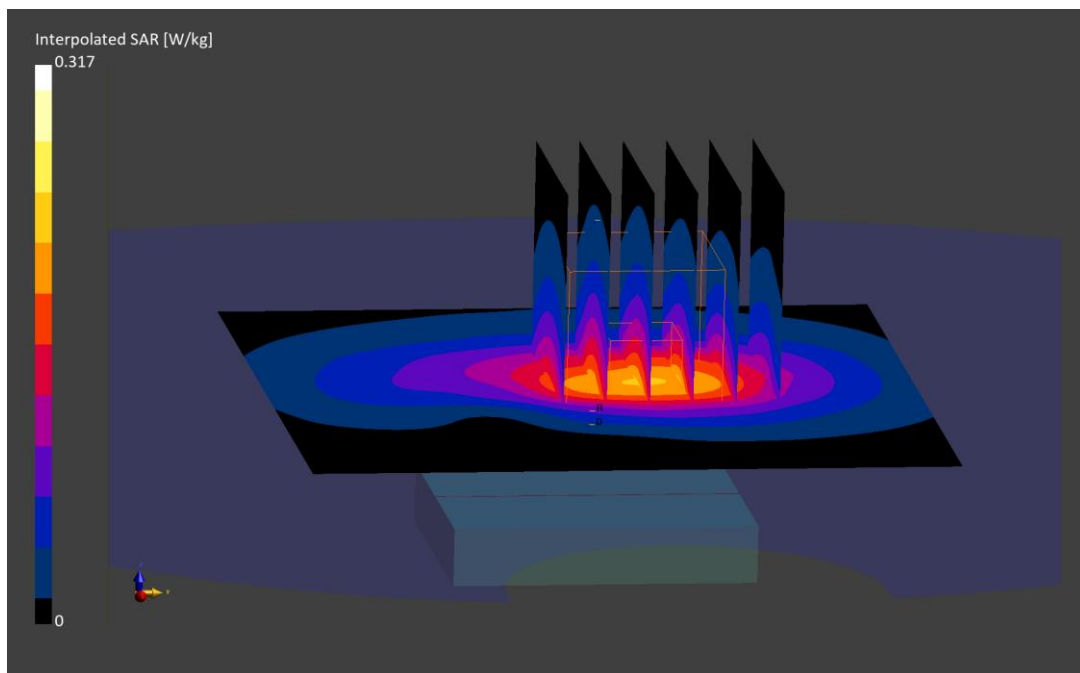

ELEMENT

DUT: BCG-A3001; Type: Watch; Serial: C52WP

Communication System: UID:10169 - CAF, LTE-FDD; MAIA: Y; Frequency: 2560.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2560.0 MHz; cond = 1.98 S/m; perm = 37.9; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 07/03/2024; Ambient Temp: 22.2°C; Tissue Temp: 23.4°C

Probe: EX3DV4 - SN7499; ConvF:(7.24,7.57,7.85); Calibrated: 2024-01-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1644; Calibrated: 2023-12-07

Phantom: Twin-SAM V8.0; Serial: 1357

Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: LTE Band 7, Exp: Head| Front Side, Ch. High,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset,
Titanium, Sport Wristband**

Area Scan (80.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.96 W/kg; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.616 W/kg

Smallest distance from peaks to all points 3 dB below is 9.9 mm

Ratio of SAR at M2 to SAR at M1 = 76.6 %

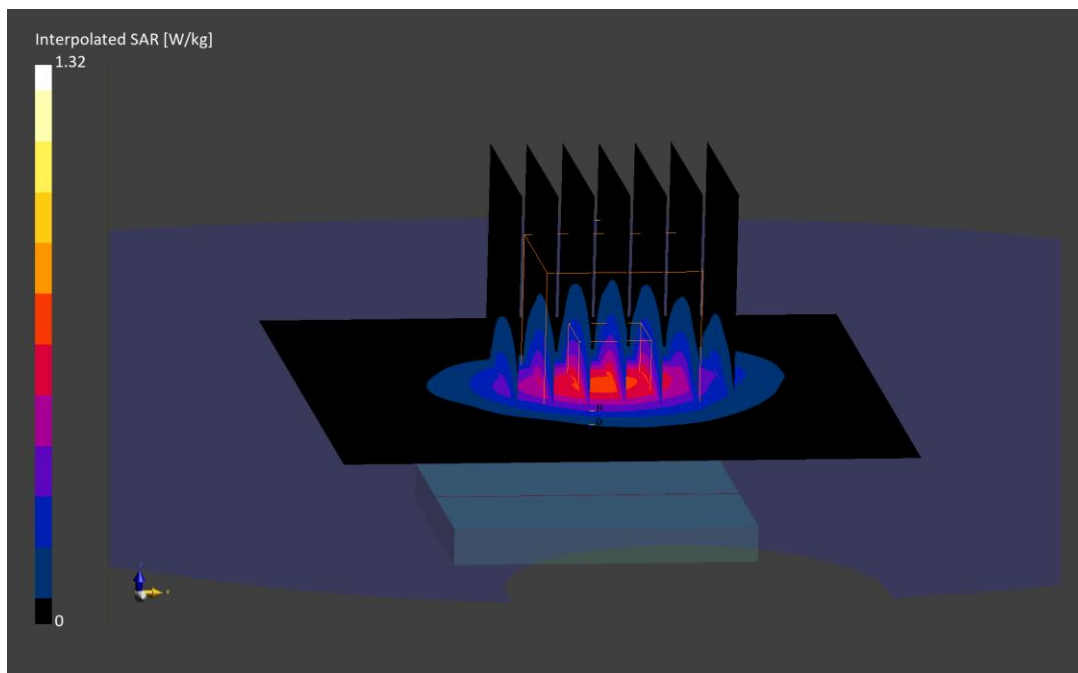

ELEMENT

DUT: BCG-A3001; Type: Watch; Serial: C52WP

Communication System: UID:10435 - AAG, LTE-TDD; MAIA: Y; Frequency: 2636.5 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2636.5 \text{ MHz}$; $\text{cond} = 1.99 \text{ S/m}$; $\text{perm} = 38.7$; $\text{density} = 1000 \text{ kg/m}^3$

Phantom Section: Flat; Space: 10.00 mm

Test Date: 08/26/2024; Ambient Temp: 20.8°C; Tissue Temp: 24.5°C

Probe: EX3DV4 - SN7499; ConvF:(7.24,7.57,7.85); Calibrated: 2024-01-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1644; Calibrated: 2023-12-07

Phantom: Twin-SAM V8.0; Serial: 1357

Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: LTE Band 41, Exp: Head| Front Side, Ch. Mid-high,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset,
Titanium, Sport Wristband**

Area Scan (80.0 x 80.0): Measurement grid: $dx=10.0 \text{ mm}$, $dy=10.0 \text{ mm}$

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0 \text{ mm}$, $dy=5.0 \text{ mm}$, $dz=1.5 \text{ mm}$; Graded Ratio: 1.5


Reference Value = 0.49 W/kg; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.931 W/kg

SAR(1 g) = 0.432 W/kg

Smallest distance from peaks to all points 3 dB below is 9.9 mm

Ratio of SAR at M2 to SAR at M1 = 76.5 %

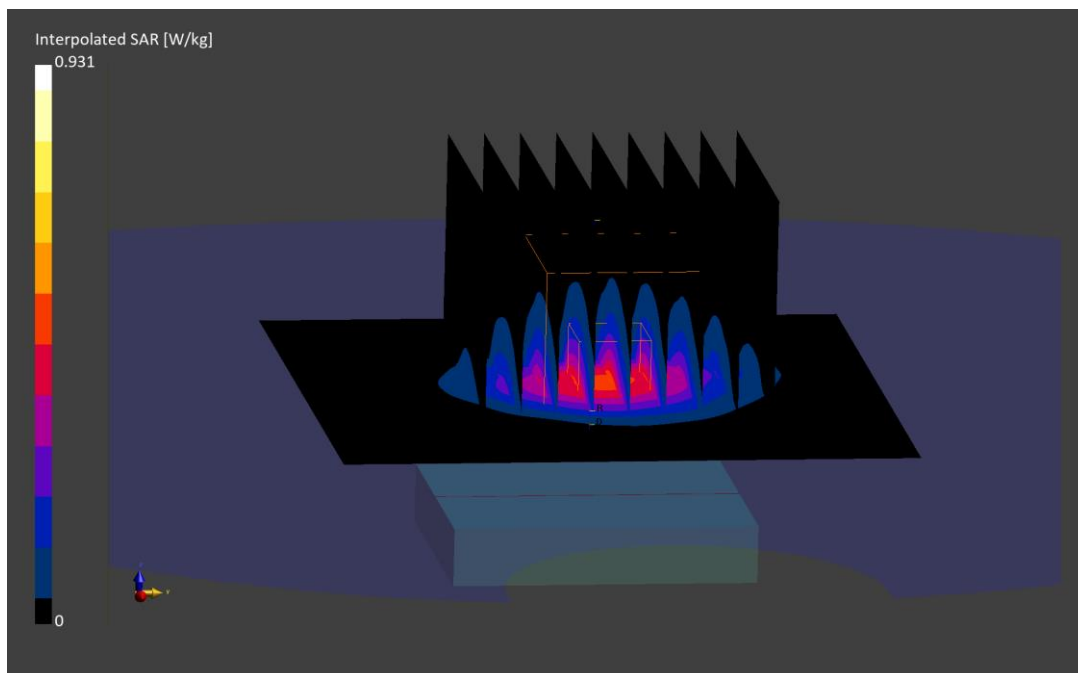

ELEMENT

DUT: BCG-A3001; Type: Watch; Serial: QMN44

Communication System: UID:10415 - AAA, WLAN; MAIA: Y; Frequency: 2462.0 MHz
Medium: 2450 Head; Medium parameters used:
f = 2462.0 MHz; cond = 1.87 S/m; perm = 38.3; density = 1000 kg/m³
Phantom Section: Flat; Space: 10.00 mm

Test Date: 07/03/2024; Ambient Temp: 22.2°C; Tissue Temp: 23.4°C

Probe: EX3DV4 - SN7499; ConvF:(7.13,7.46,7.69); Calibrated: 2024-01-16
Sensor-Surface: 1.4mm (All points)
Electronics: DAE4 Sn1644; Calibrated: 2023-12-07
Phantom: Twin-SAM V8.0; Serial: 1357
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: 2.4 GHz WIFI/ IEEE 802.11b, 22 MHz Bandwidth, Exp: Head|
Front Side, Ch. 11, 1Mbps,
Titanium, Sport Wristband**

Area Scan (80.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.30 W/kg; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.509 W/kg

SAR(1 g) = 0.238 W/kg

Smallest distance from peaks to all points 3 dB below is 11.0 mm

Ratio of SAR at M2 to SAR at M1 = 76.2 %

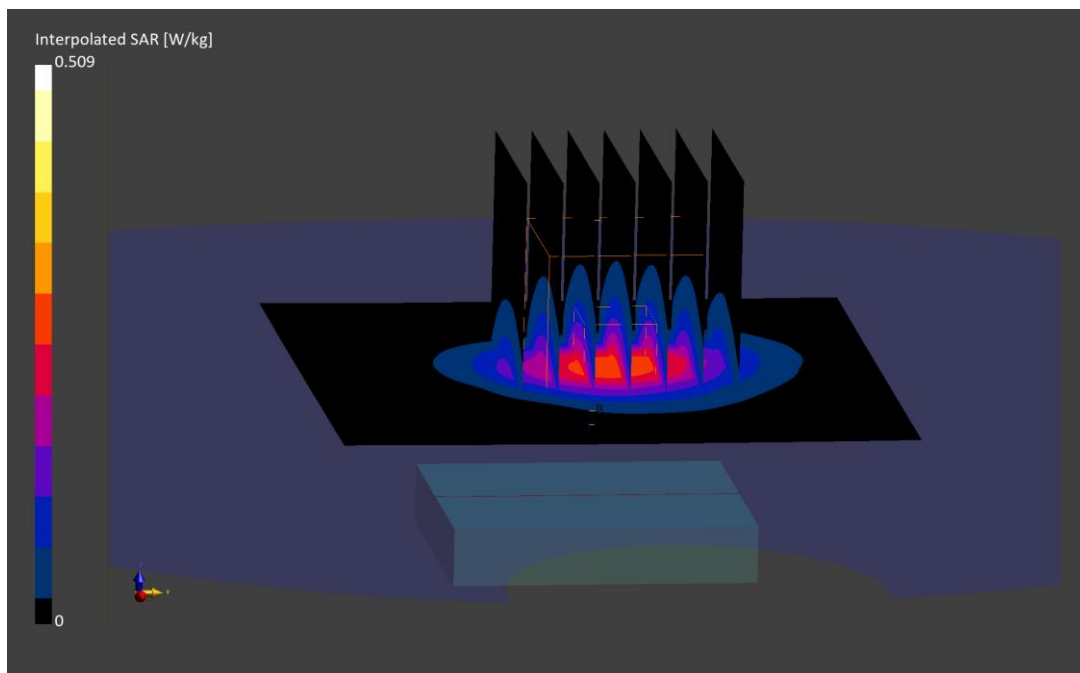

ELEMENT

DUT: BCG-A3001; Type: Watch; Serial: 3Y7JR

Communication System: UID:10417 - AAD, WLAN; MAIA: Y; Frequency: 5825.0 MHz
Medium: 5200-5800 Head; Medium parameters used:
f = 5825.0 MHz; cond = 5.21 S/m; perm = 33.7; density = 1000 kg/m³
Phantom Section: Flat; Space: 10.00 mm

Test Date: 06/22/2024; Ambient Temp: 21.5°C; Tissue Temp: 19.6°C

Probe: EX3DV4 - SN7427; ConvF:(4.35,4.78,4.93); Calibrated: 2024-02-09
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn467; Calibrated: 2024-02-09
Phantom: Twin-SAM V8.0; Serial: 2070
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: 5 GHz WIFI/ IEEE 802.11a, 20 MHz Bandwidth, U-NII-3, Exp: Head|
Front Side, Ch. 165, 6.5 Mbps,
Titanium, Metal Loop Wristband**

Area Scan (80.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: dx=4.0 mm, dy=4.0 mm, dz=1.4 mm; Graded Ratio: 1.4


Reference Value = 0.12 W/kg; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.847 W/kg

SAR(1 g) = 0.213 W/kg

Smallest distance from peaks to all points 3 dB below is 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 60.9 %

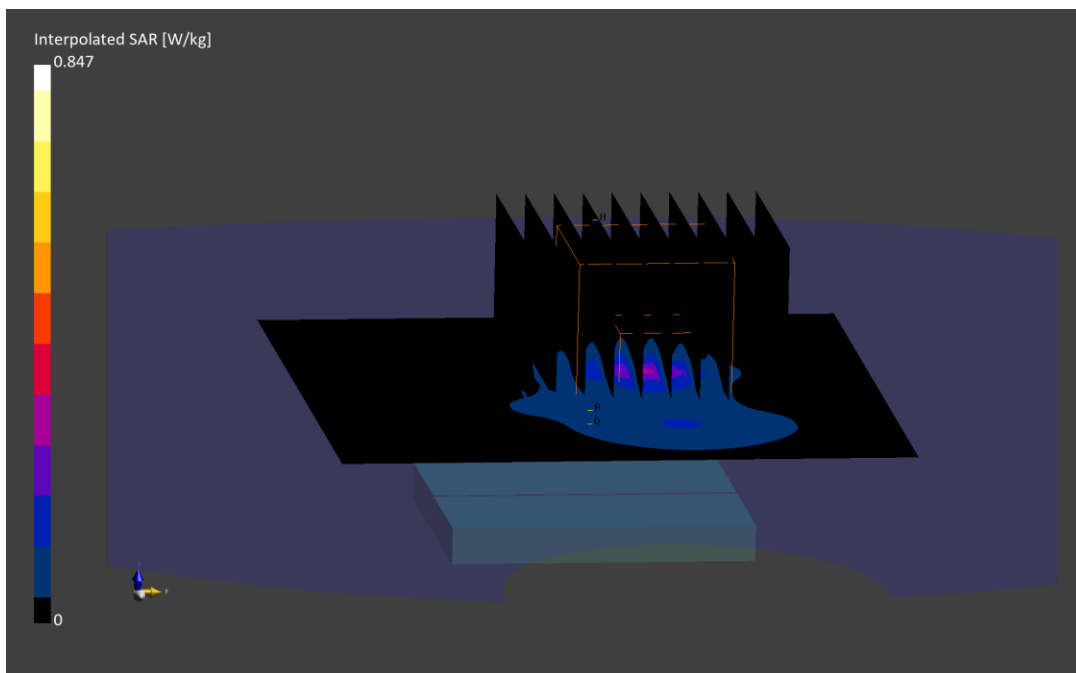

ELEMENT

DUT: BCG-A3001; Type: Watch; Serial: 6K4TT

Communication System: UID:10032 - CAA, Bluetooth; MAIA: Y; Frequency: 2402.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2402.0 MHz; cond = 1.74 S/m; perm = 39.3; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 07/03/2024; Ambient Temp: 21.7°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7682; ConvF:(7.87,7.72,8.18); Calibrated: 2024-05-13

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1683; Calibrated: 2024-05-08

Phantom: Twin-SAM V8.0; Serial: 1917

Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: 2.4 GHz Bluetooth, Exp: Head| Front Side, Ch. 0, 1 Mbps,
Titanium, Sport Wristband**

Area Scan (80.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.15 W/kg; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.304 W/kg

SAR(1 g) = 0.173 W/kg

Smallest distance from peaks to all points 3 dB below is 11.1 mm

Ratio of SAR at M2 to SAR at M1 = 84.0 %

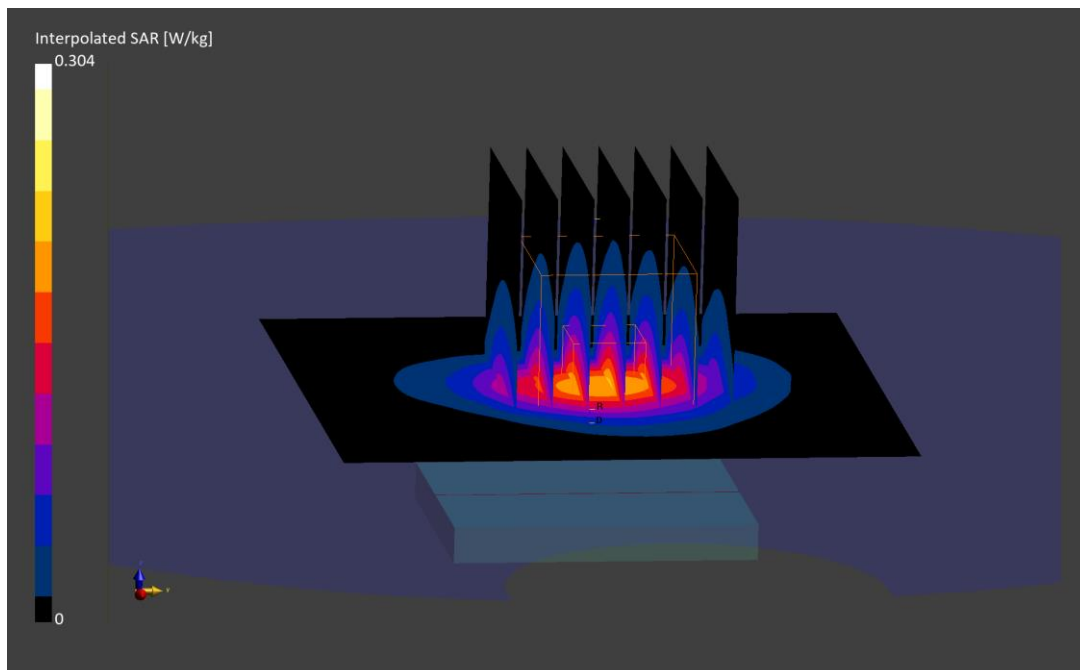

ELEMENT

DUT: BCG-A3001; Type: Watch; Serial: YQWPD

Communication System: UID:0 - -, CW; MAIA: Y; Frequency: 5846.3 MHz
Medium: 5200-5800 Head; Medium parameters used:
f = 5846.3 MHz; cond = 5.29 S/m; perm = 33.6; density = 1000 kg/m³
Phantom Section: Flat; Space: 10.00 mm


Test Date: 07/10/2024; Ambient Temp: 21.6°C; Tissue Temp: 20.9°C

Probe: EX3DV4 - SN3949; ConvF:(5.21,5.21,5.21); Calibrated: 2023-10-02
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1684; Calibrated: 2023-09-12
Phantom: Twin-SAM V8.0; Serial: 1736
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: 802.15.4 ab-NB, Exp: Head| Front Side, Ch. High, 1 Mbps,
Titanium, Metal Loop Wristband**

Area Scan (80.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: dx=4.0 mm, dy=4.0 mm, dz=1.4 mm; Graded Ratio: 1.4
Reference Value = 0.01 W/kg; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 0.096 W/kg
SAR(1 g) = 0.019 W/kg
Smallest distance from peaks to all points 3 dB below is 6.4 mm
Ratio of SAR at M2 to SAR at M1 = 56.0 %

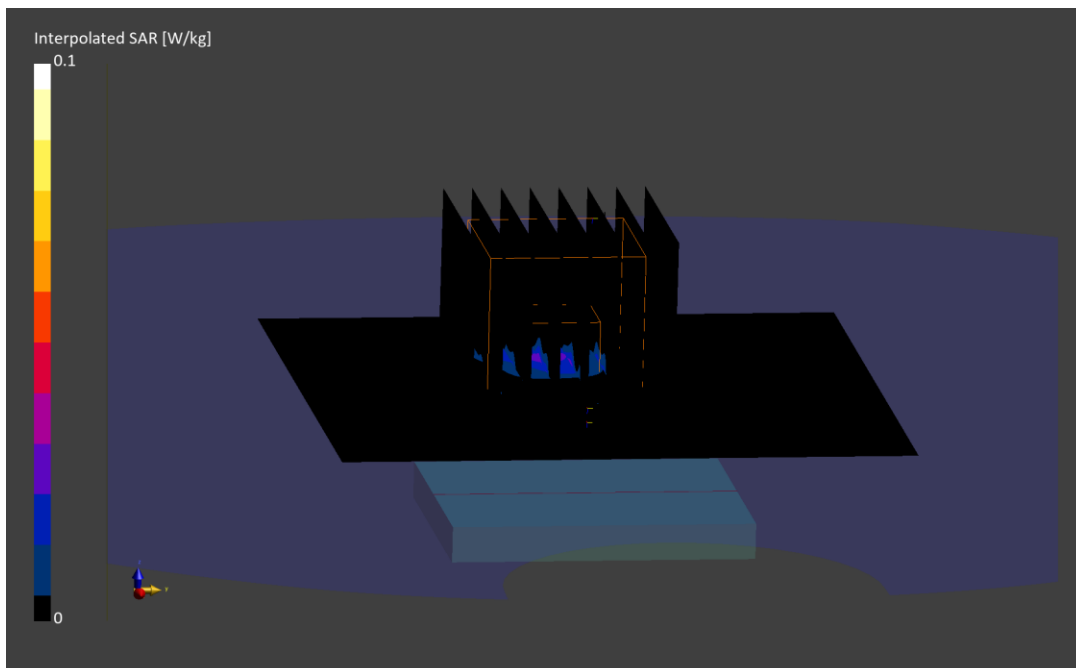

ELEMENT

DUT: BCG-A3001; Type: Watch; Serial: N717C

Communication System: UID:10011 - CAC, WCDMA; MAIA: Y; Frequency: 836.6 MHz

Medium: 835 Head; Medium parameters used:

f = 836.6 MHz; cond = 0.904 S/m; perm = 41.2; density = 1000 kg/m³

Phantom Section: Flat; Space: 0 mm

Test Date: 06/21/2024; Ambient Temp: 20.4°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7668; ConvF:(9.05,9.05,9.05); Calibrated: 2023-08-10

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1681; Calibrated: 2023-09-12

Phantom: Twin-SAM V5.0; Serial: 1692

Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: UMTS 850, Exp: Extremity| Back Side, Ch. Mid,
Titanium, Metal Links Wristband**

Area Scan (90.0 x 90.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (36.0 x 36.0 x 30.0): Measurement grid: dx=4.5 mm, dy=4.5 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.19 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.928 W/kg

SAR(10 g) = 0.157 W/kg

Smallest distance from peaks to all points 3 dB below is 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 60.3 %

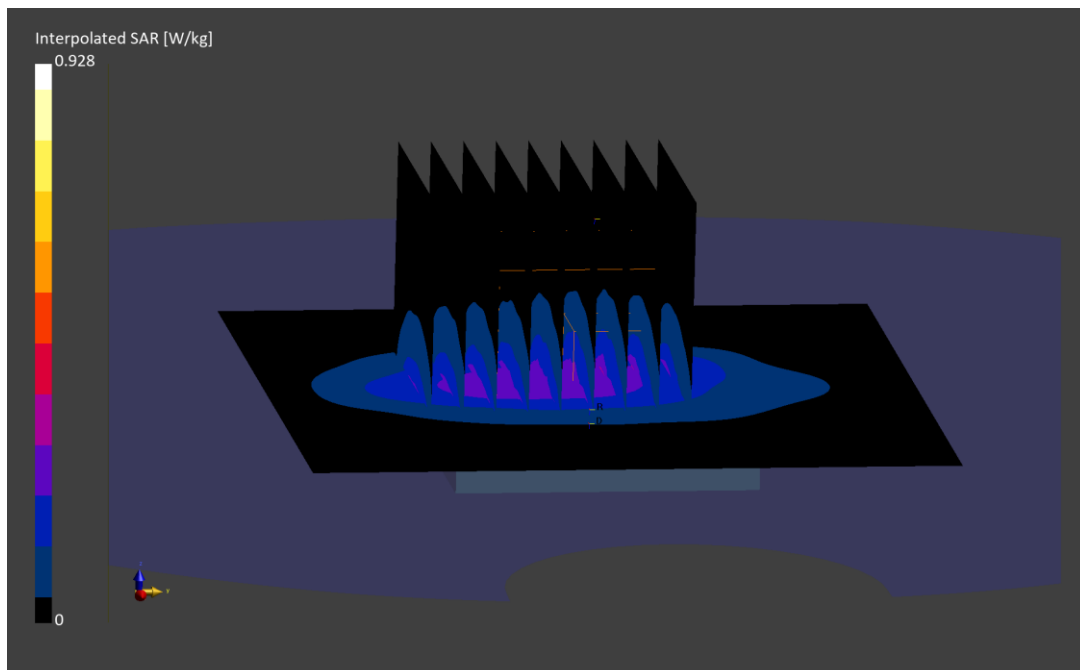

ELEMENT

DUT: BCG-A3001; Type: Watch; Serial: 4XX4J

Communication System: UID:10011 - CAC, WCDMA; MAIA: Y; Frequency: 1732.4 MHz

Medium: 1750 Head; Medium parameters used:

f = 1732.4 MHz; cond = 1.35 S/m; perm = 38.5; density = 1000 kg/m³

Phantom Section: Flat; Space: 0 mm

Test Date: 07/03/2024; Ambient Temp: 20.3°C; Tissue Temp: 19.5°C

Probe: EX3DV4 - SN7546; ConvF:(8.34,7.55,8.26); Calibrated: 2024-04-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1402; Calibrated: 2024-04-10

Phantom: Twin-SAM V8.0; Serial: 2029

Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: UMTS 1750, Exp: Extremity| Back Side, Ch. Mid,
Aluminum, Metal Links Wristband**

Area Scan (90.0 x 90.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.41 W/kg; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(10 g) = 0.220 W/kg

Smallest distance from peaks to all points 3 dB below is 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 75.7 %

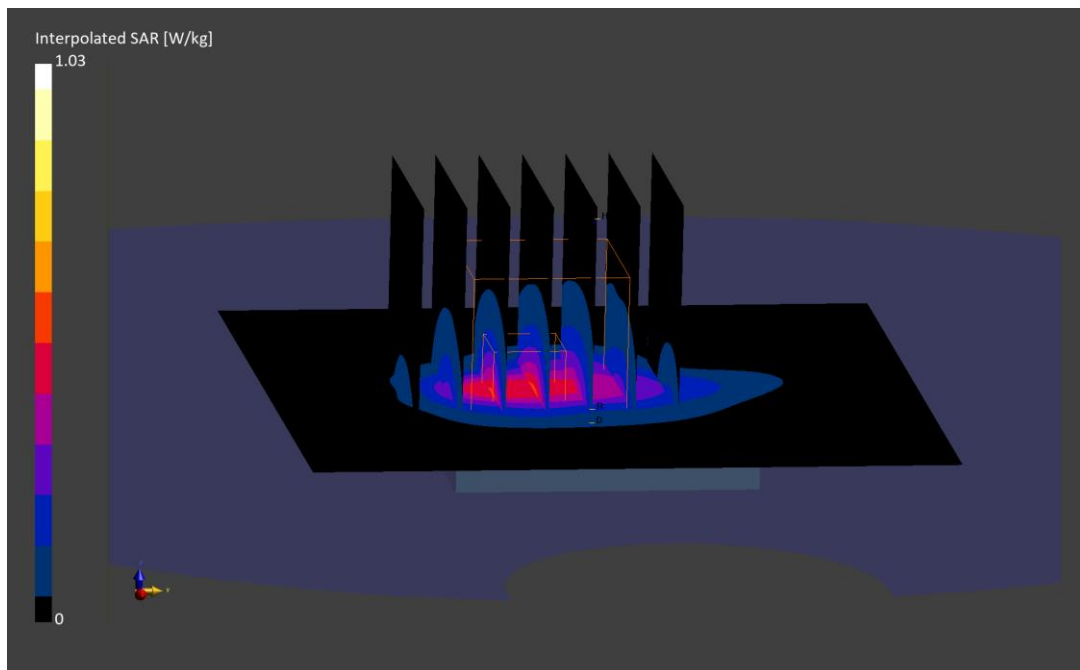

ELEMENT

DUT: BCG-A3001; Type: Watch; Serial: QWX1H

Communication System: UID:10011 - CAC, WCDMA; MAIA: Y; Frequency: 1852.4 MHz

Medium: 1900 Head; Medium parameters used:

f = 1852.4 MHz; cond = 1.38 S/m; perm = 38.7; density = 1000 kg/m³

Phantom Section: Flat; Space: 0 mm

Test Date: 07/03/2024; Ambient Temp: 22.7°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7639; ConvF:(8.53,8.53,8.53); Calibrated: 2023-11-09

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1403; Calibrated: 2023-11-14

Phantom: Twin-SAM V8.0; Serial: 2034

Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: UMTS 1900, Exp: Extremity| Back Side, Ch. Low,
Aluminum, Metal Links Wristband**

Area Scan (90.0 x 90.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.46 W/kg; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(10 g) = 0.229 W/kg

Smallest distance from peaks to all points 3 dB below is 7.7 mm

Ratio of SAR at M2 to SAR at M1 = 77.3 %

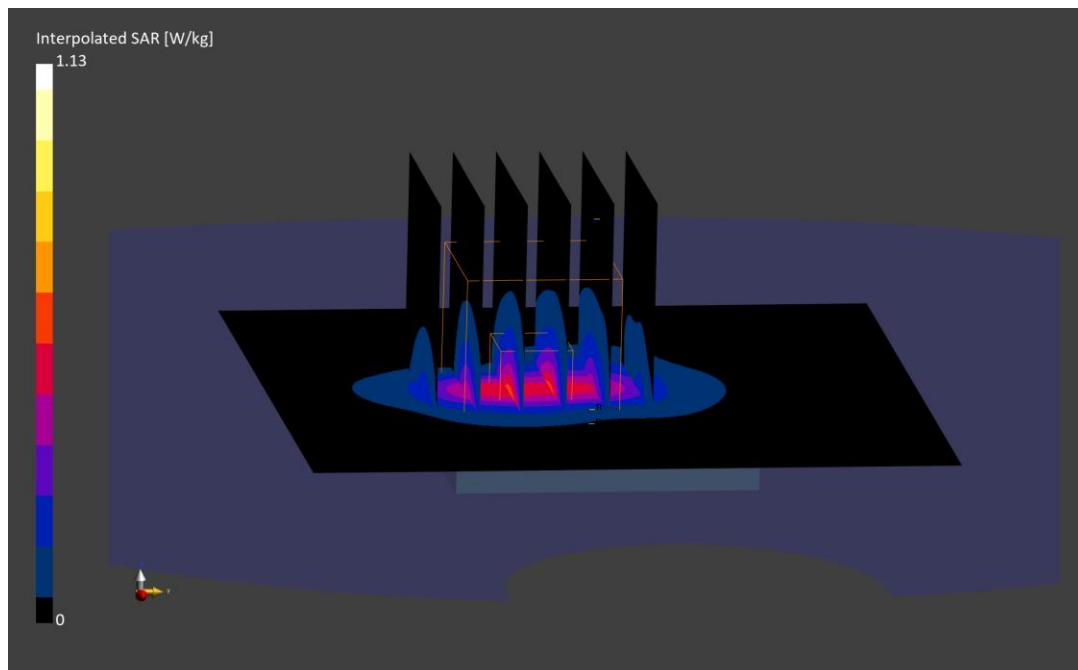

ELEMENT

DUT: BCG-A3001; Type: Watch; Serial: 26NRF

Communication System: UID:10175 - CAG, LTE-FDD; MAIA: Y; Frequency: 707.5 MHz

Medium: 750 Head; Medium parameters used:

$f = 707.5 \text{ MHz}$; $\text{cond} = 0.861 \text{ S/m}$; $\text{perm} = 43.0$; $\text{density} = 1000 \text{ kg/m}^3$

Phantom Section: Flat; Space: 0 mm

Test Date: 06/26/2024; Ambient Temp: 21.8°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN3949; ConvF:(10.55,10.55,10.55); Calibrated: 2023-10-02

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1684; Calibrated: 2023-09-12

Phantom: Twin-SAM V8.0; Serial: 1736

Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: LTE Band 12, Exp: Extremity| Back Side, Ch. Mid,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset,
Aluminum, Metal Links Wristband**

Area Scan (90.0 x 90.0): Measurement grid: $dx=15.0 \text{ mm}$, $dy=15.0 \text{ mm}$

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.5 \text{ mm}$, $dy=5.5 \text{ mm}$, $dz=1.5 \text{ mm}$; Graded Ratio: 1.5


Reference Value = 0.15 W/kg; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.741 W/kg

SAR(10 g) = 0.103 W/kg

Smallest distance from peaks to all points 3 dB below is 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 57.4 %

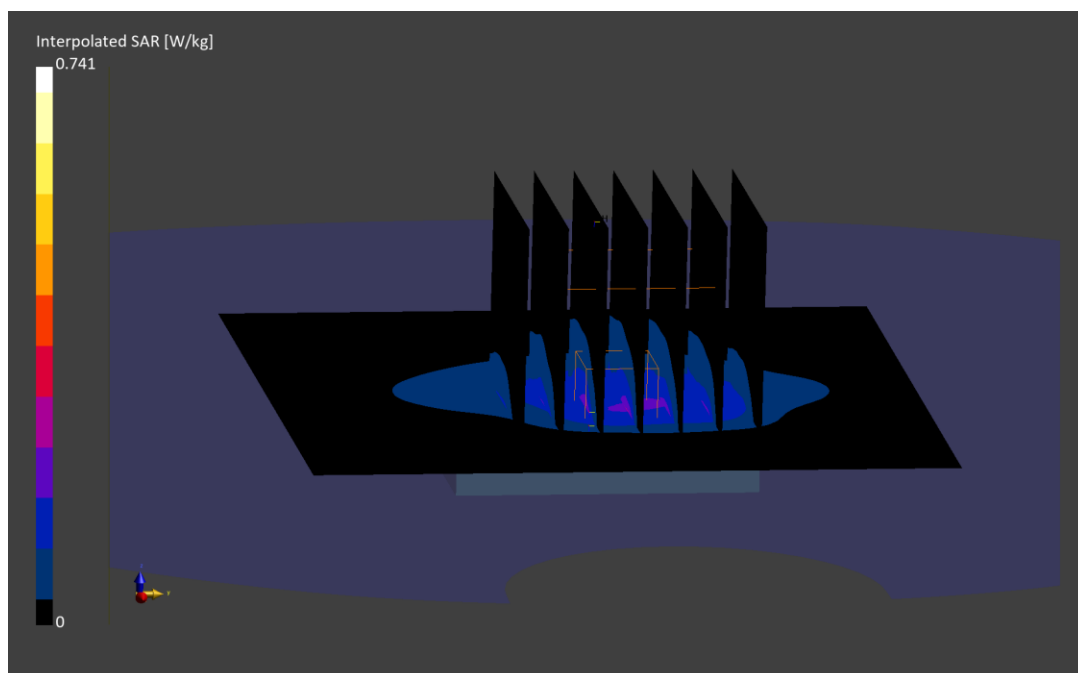

ELEMENT

DUT: BCG-A3001; Type: Watch; Serial: N717C

Communication System: UID:10175 - CAG, LTE-FDD; MAIA: Y; Frequency: 782.0 MHz

Medium: 750 Head; Medium parameters used:

$f = 782.0$ MHz; $\text{cond} = 0.927$ S/m; $\text{perm} = 42.0$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 0 mm

Test Date: 06/26/2024; Ambient Temp: 21.8°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN3949; ConvF:(10.55,10.55,10.55); Calibrated: 2023-10-02

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1684; Calibrated: 2023-09-12

Phantom: Twin-SAM V8.0; Serial: 1736

Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: LTE Band 13, Exp: Extremity| Back Side, Ch. Mid,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset,
Titanium, Metal Links Wristband**

Area Scan (90.0 x 90.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.24 W/kg; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.867 W/kg

SAR(10 g) = 0.174 W/kg

Smallest distance from peaks to all points 3 dB below is 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 65.4 %

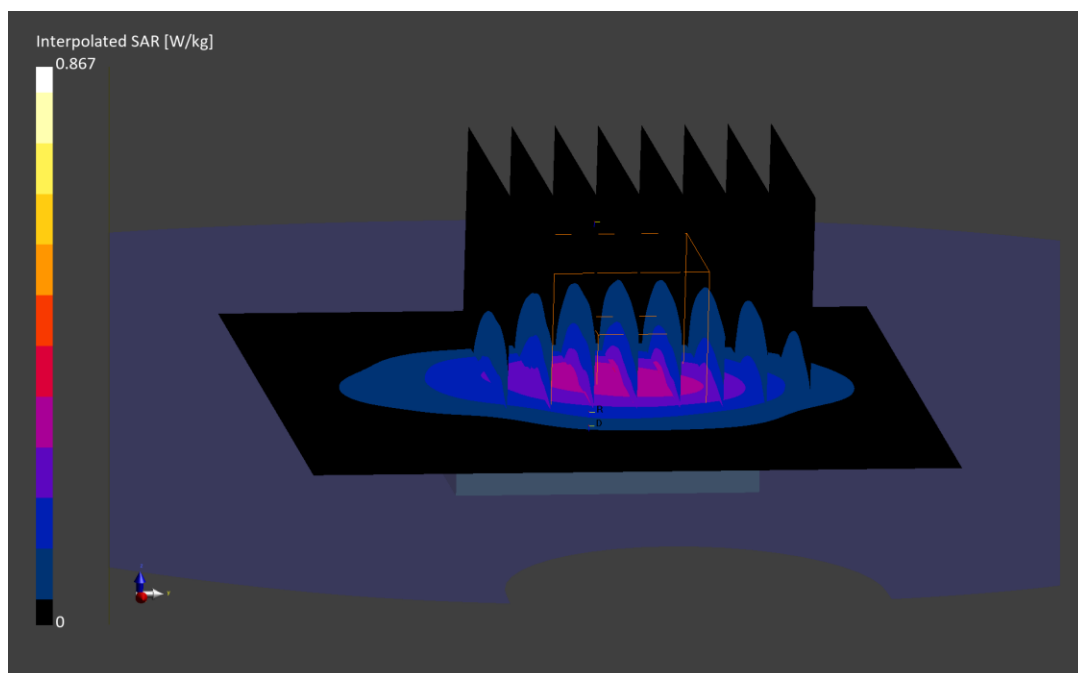

ELEMENT

DUT: BCG-A3001; Type: Watch; Serial: 2QJWK

Communication System: UID:10175 - CAG, LTE-FDD; MAIA: Y; Frequency: 793.0 MHz

Medium: 750 Head; Medium parameters used:

f = 793.0 MHz; cond = 0.934 S/m; perm = 41.4; density = 1000 kg/m³

Phantom Section: Flat; Space: 0 mm

Test Date: 06/17/2024; Ambient Temp: 21.5°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN3949; ConvF:(10.55,10.55,10.55); Calibrated: 2023-10-02

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1684; Calibrated: 2023-09-12

Phantom: Twin-SAM V8.0; Serial: 1736

Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: LTE Band 14, Exp: Extremity| Back Side, Ch. Mid,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset,
Aluminum, Metal Links Wristband**

Area Scan (90.0 x 90.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=4.8 mm, dy=4.8 mm, dz=1.4 mm; Graded Ratio: 1.4


Reference Value = 0.23 W/kg; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.40 W/kg

SAR(10 g) = 0.161 W/kg

Smallest distance from peaks to all points 3 dB below is 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 57.7 %

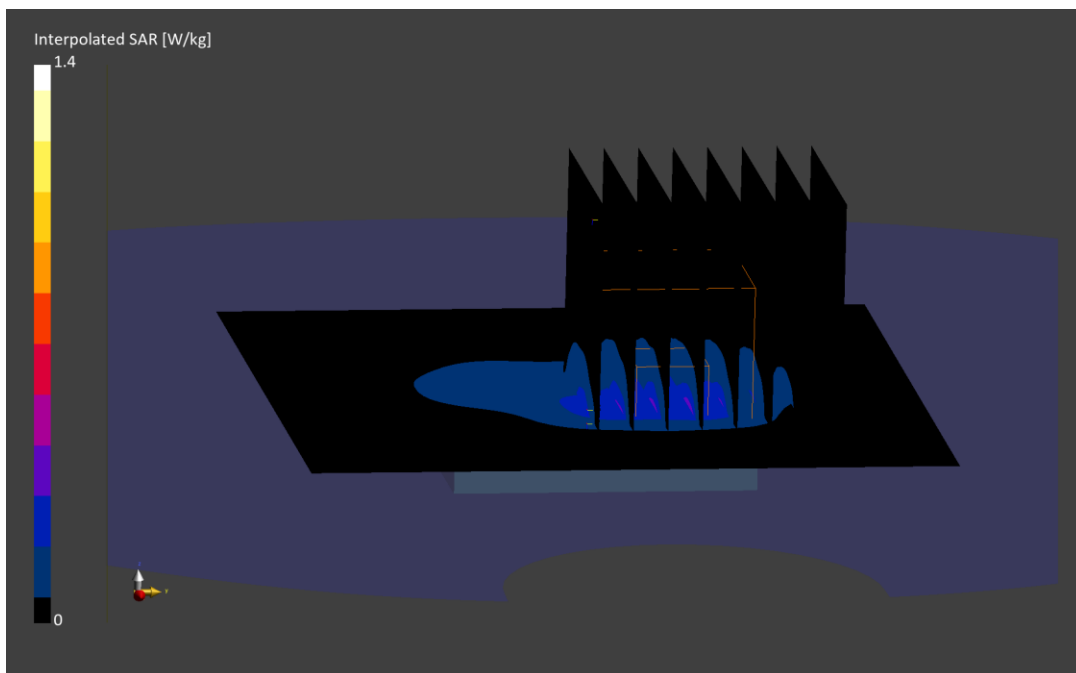

ELEMENT

DUT: BCG-A3001; Type: Watch; Serial: WGGQL

Communication System: UID:10175 - CAH, LTE-FDD; MAIA: Y; Frequency: 831.5 MHz

Medium: 835 Head; Medium parameters used:

$f = 831.5$ MHz; $\text{cond} = 0.906$ S/m; $\text{perm} = 40.8$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 0 mm

Test Date: 06/26/2024; Ambient Temp: 22.3°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7668; ConvF:(9.05,9.05,9.05); Calibrated: 2023-08-10

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1681; Calibrated: 2023-09-12

Phantom: Twin-SAM V5.0; Serial: 1692

Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: LTE Band 26, Exp: Extremity| Back Side, Ch. Mid,
10 MHz Bandwidth, QPSK, 1 RB, 49 RB Offset,
Titanium, Metal Links Wristband**

Area Scan (90.0 x 90.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (32.0 x 32.0 x 30.0): Measurement grid: $dx=4.0$ mm, $dy=4.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.23 W/kg; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.72 W/kg

SAR(10 g) = 0.213 W/kg

Smallest distance from peaks to all points 3 dB below is 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 57.2 %

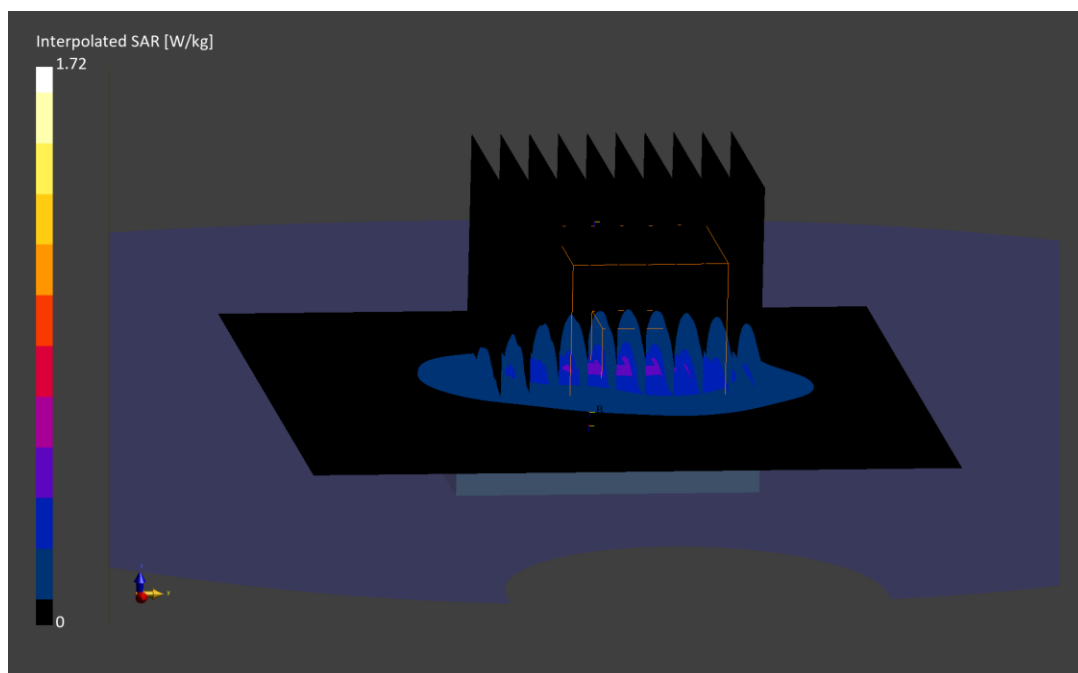

ELEMENT

DUT: BCG-A3001; Type: Watch; Serial: N717C

Communication System: UID:10175 - CAH, LTE-FDD; MAIA: Y; Frequency: 836.5 MHz

Medium: 835 Head; Medium parameters used:

f = 836.5 MHz; cond = 0.904 S/m; perm = 41.0; density = 1000 kg/m³

Phantom Section: Flat; Space: 0 mm

Test Date: 06/24/2024; Ambient Temp: 21.5°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN7668; ConvF:(9.05,9.05,9.05); Calibrated: 2023-08-10

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1681; Calibrated: 2023-09-12

Phantom: Twin-SAM V5.0; Serial: 1692

Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: LTE Band 5, Exp: Extremity| Back Side, Ch. Mid,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset,
Titanium, Metal Links Wristband**

Area Scan (90.0 x 90.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (36.0 x 36.0 x 30.0): Measurement grid: dx=4.5 mm, dy=4.5 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.21 W/kg; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.979 W/kg

SAR(10 g) = 0.175 W/kg

Smallest distance from peaks to all points 3 dB below is 6.9 mm

Ratio of SAR at M2 to SAR at M1 = 60.1 %

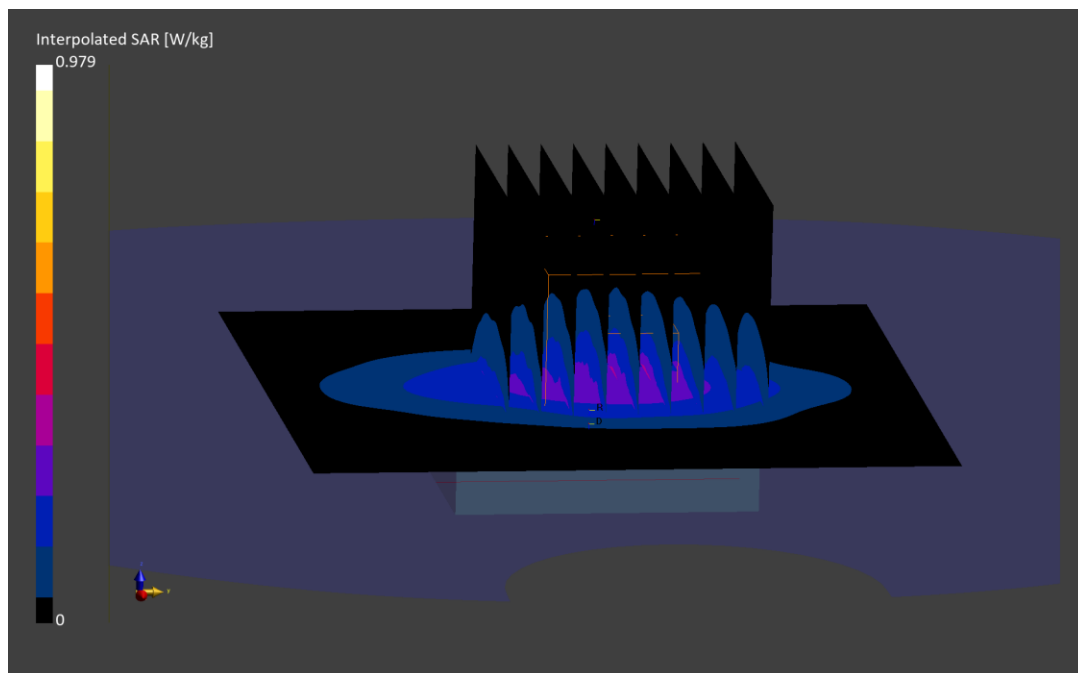

ELEMENT

DUT: BCG-A3001; Type: Watch; Serial: 4XX4J

Communication System: UID:10169 - CAF, LTE-FDD; MAIA: Y; Frequency: 1745.0 MHz

Medium: 1750 Head; Medium parameters used:

$f = 1745.0$ MHz; $\text{cond} = 1.37$ S/m; $\text{perm} = 38.5$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 0 mm

Test Date: 07/03/2024; Ambient Temp: 20.3°C; Tissue Temp: 19.5°C

Probe: EX3DV4 - SN7546; ConvF:(8.34,7.55,8.26); Calibrated: 2024-04-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1402; Calibrated: 2024-04-10

Phantom: Twin-SAM V8.0; Serial: 2029

Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: LTE Band 66, Exp: Extremity| Back Side, Ch. Mid,
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset,
Aluminum, Metal Links Wristband**

Area Scan (90.0 x 90.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.55 W/kg; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.29 W/kg

SAR(10 g) = 0.262 W/kg

Smallest distance from peaks to all points 3 dB below is 8.7 mm

Ratio of SAR at M2 to SAR at M1 = 75.6 %

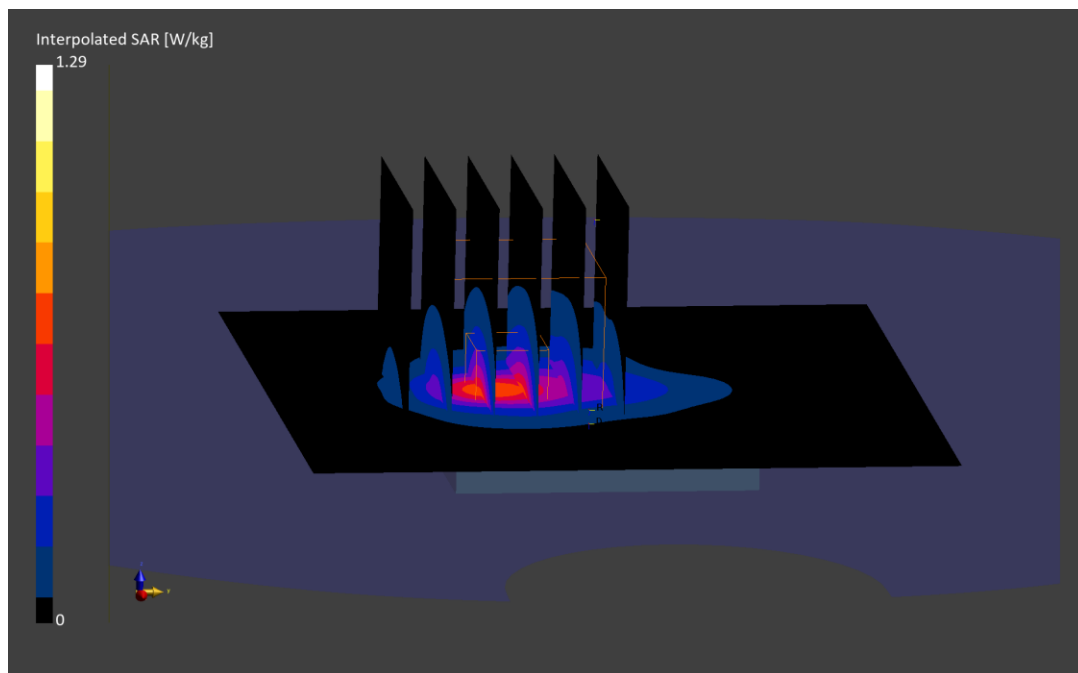

ELEMENT

DUT: BCG-A3001; Type: Watch; Serial: 2WN29

Communication System: UID:10169 - CAF, LTE-FDD; MAIA: Y; Frequency: 1860.0 MHz
Medium: 1900 Head; Medium parameters used:
f = 1860.0 MHz; cond = 1.39 S/m; perm = 38.7; density = 1000 kg/m³
Phantom Section: Flat; Space: 0 mm

Test Date: 07/03/2024; Ambient Temp: 22.7°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7639; ConvF:(8.53,8.53,8.53); Calibrated: 2023-11-09
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1403; Calibrated: 2023-11-14
Phantom: Twin-SAM V8.0; Serial: 2034
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: LTE Band 25, Exp: Extremity| Back Side, Ch. Low,
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset,
Aluminum, Metal Loop Wristband**

Area Scan (90.0 x 90.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.37 W/kg; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.854 W/kg

SAR(10 g) = 0.167 W/kg

Smallest distance from peaks to all points 3 dB below is 7.7 mm

Ratio of SAR at M2 to SAR at M1 = 75.8 %

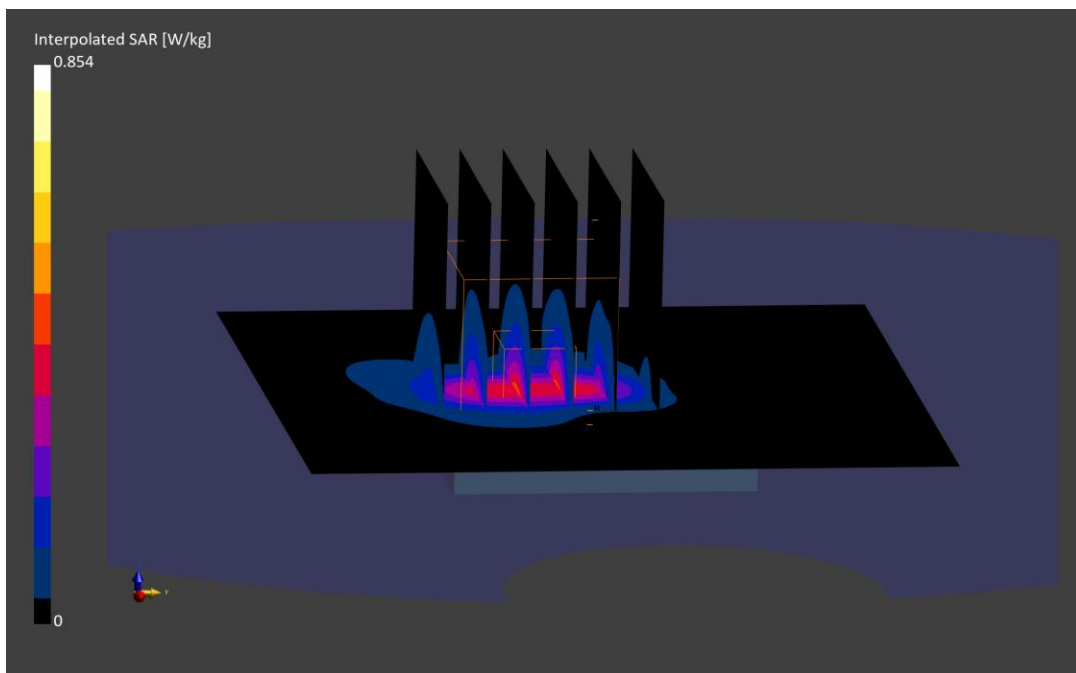

ELEMENT

DUT: BCG-A3001; Type: Watch; Serial: 267J9

Communication System: UID:10169 - CAF, LTE-FDD; MAIA: Y; Frequency: 2510.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2510.0 MHz; cond = 1.91 S/m; perm = 38.9; density = 1000 kg/m³

Phantom Section: Flat; Space: 0 mm

Test Date: 07/08/2024; Ambient Temp: 20.8°C; Tissue Temp: 23.6°C

Probe: EX3DV4 - SN7499; ConvF:(7.13,7.46,7.69); Calibrated: 2024-01-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1644; Calibrated: 2023-12-07

Phantom: Twin-SAM V8.0; Serial: 1357

Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: LTE Band 7, Exp: Extremity| Back Side, Ch. Low,
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset,
Aluminum, Sport Wristband**

Area Scan (80.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.42 W/kg; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.614 W/kg

SAR(10 g) = 0.118 W/kg

Smallest distance from peaks to all points 3 dB below is 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 73.3 %

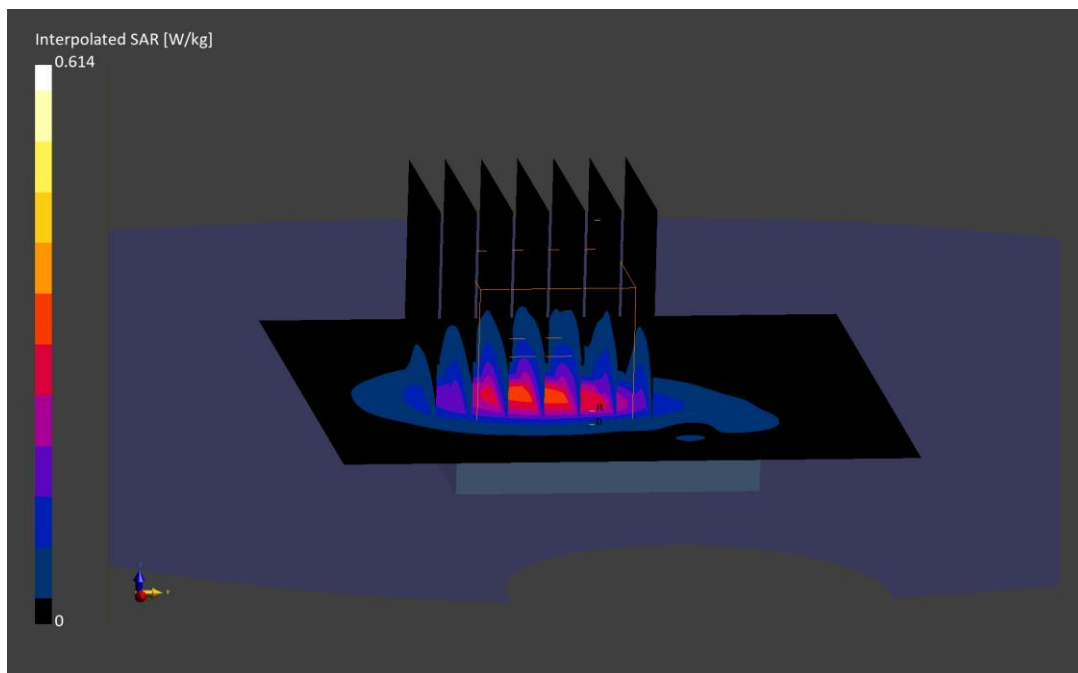

ELEMENT

DUT: BCG-A3001; Type: Watch; Serial: 3M74J

Communication System: UID:10435 - AAG, LTE-TDD; MAIA: Y; Frequency: 2506.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2506.0 MHz; cond = 1.91 S/m; perm = 39.0; density = 1000 kg/m³

Phantom Section: Flat; Space: 0 mm

Test Date: 07/08/2024; Ambient Temp: 20.8°C; Tissue Temp: 23.6°C

Probe: EX3DV4 - SN7499; ConvF:(7.13,7.46,7.69); Calibrated: 2024-01-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1644; Calibrated: 2023-12-07

Phantom: Twin-SAM V8.0; Serial: 1357

Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: LTE Band 41, Exp: Extremity| Back Side, Ch. Low,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset,
Aluminum, Sport Wristband**

Area Scan (80.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.32 W/kg; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.453 W/kg

SAR(10 g) = 0.097 W/kg

Smallest distance from peaks to all points 3 dB below is 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 72.8 %

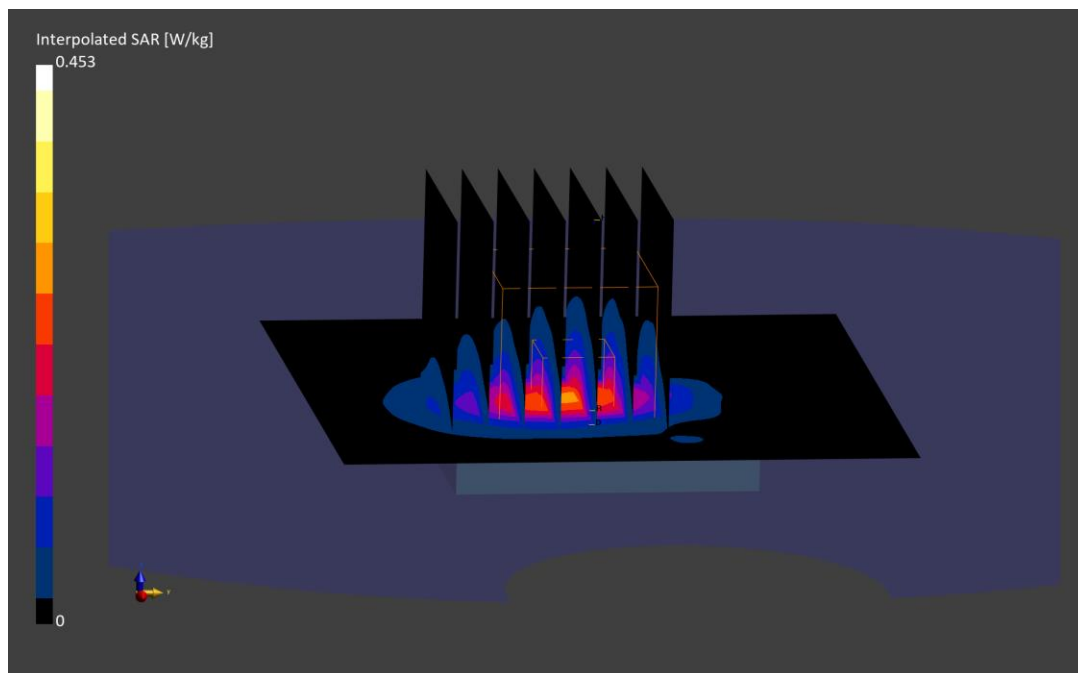

ELEMENT

DUT: BCG-A3001; Type: Watch; Serial: 9TVDQ

Communication System: UID:10415 - AAA, WLAN; MAIA: Y; Frequency: 2462.0 MHz
Medium: 2450 Head; Medium parameters used:
f = 2462.0 MHz; cond = 1.76 S/m; perm = 39.8; density = 1000 kg/m³
Phantom Section: Flat; Space: 0 mm

Test Date: 07/08/2024; Ambient Temp: 21.4°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7682; ConvF:(7.87,7.72,8.18); Calibrated: 2024-05-13
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1683; Calibrated: 2024-05-08
Phantom: Twin-SAM V8.0; Serial: 1917
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: 2.4 GHz WIFI/ IEEE 802.11b, 22 MHz Bandwidth, Exp: Extremity|
Back Side, Ch. 11, 1Mbps,
Aluminum, Metal Links Wristband**

Area Scan (80.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.18 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.315 W/kg

SAR(10 g) = 0.083 W/kg

Smallest distance from peaks to all points 3 dB below is 9.0 mm

Ratio of SAR at M2 to SAR at M1 = 82.8 %

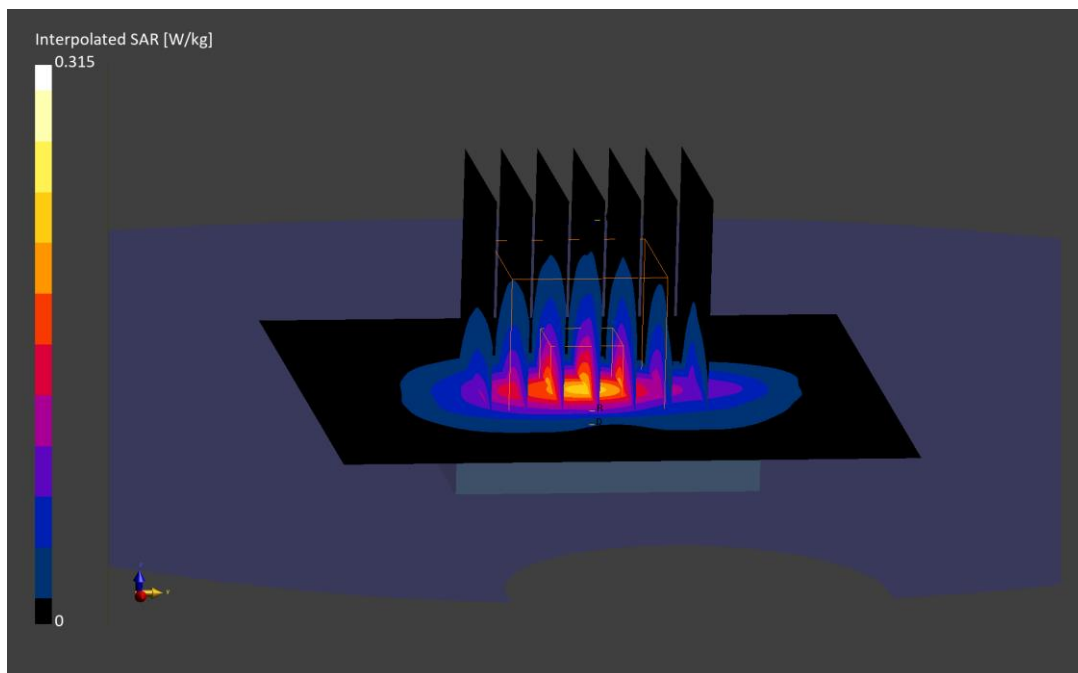

ELEMENT

DUT: BCG-A3001; Type: Watch; Serial: 3Y7JR

Communication System: UID:10417 - AAD, WLAN; MAIA: Y; Frequency: 5825.0 MHz
Medium: 5200-5800 Head; Medium parameters used:
f = 5825.0 MHz; cond = 5.17 S/m; perm = 33.7; density = 1000 kg/m³
Phantom Section: Flat; Space: 0 mm

Test Date: 06/27/2024; Ambient Temp: 20.8°C; Tissue Temp: 19.8°C

Probe: EX3DV4 - SN7427; ConvF:(4.35,4.78,4.93); Calibrated: 2024-02-09
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn467; Calibrated: 2024-02-09
Phantom: Twin-SAM V8.0; Serial: 2070
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: 5 GHz WIFI/ IEEE 802.11a, 20 MHz Bandwidth, U-NII-3, Exp: Extremity|
Back Side, Ch. 165, 6.5 Mbps,
Titanium, Metal Loop Wristband**

Area Scan (80.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: dx=4.0 mm, dy=4.0 mm, dz=1.4 mm; Graded Ratio: 1.4


Reference Value = 0.05 W/kg; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.328 W/kg

SAR(10 g) = 0.028 W/kg

Smallest distance from peaks to all points 3 dB below is 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 55.4 %

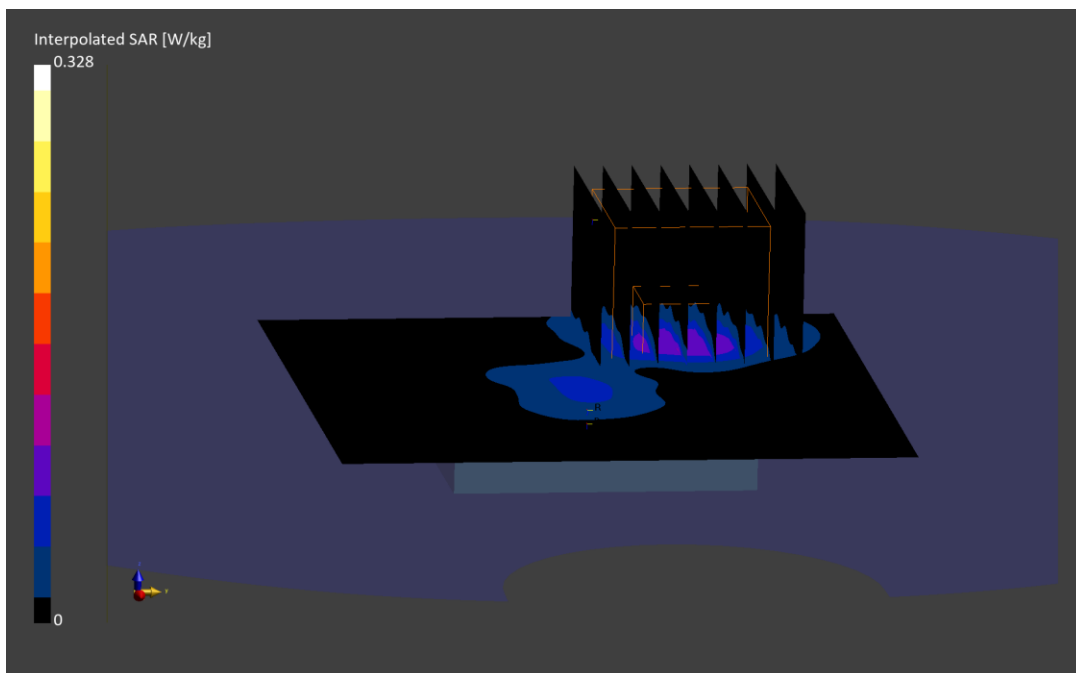

ELEMENT

DUT: BCG-A3001; Type: Watch; Serial: 6WRDP

Communication System: UID:10032 - CAA, Bluetooth; MAIA: Y; Frequency: 2402.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2402.0 MHz; cond = 1.74 S/m; perm = 39.3; density = 1000 kg/m³

Phantom Section: Flat; Space: 0 mm

Test Date: 07/03/2024; Ambient Temp: 21.7°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7682; ConvF:(7.87,7.72,8.18); Calibrated: 2024-05-13

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1683; Calibrated: 2024-05-08

Phantom: Twin-SAM V8.0; Serial: 1917

Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: 2.4 GHz Bluetooth, Exp: Extremity| Back Side, Ch. 0, 1 Mbps,
Aluminum, Sport Wristband**

Area Scan (80.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.07 W/kg; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.163 W/kg

SAR(10 g) = 0.034 W/kg

Smallest distance from peaks to all points 3 dB below is 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 77.2 %

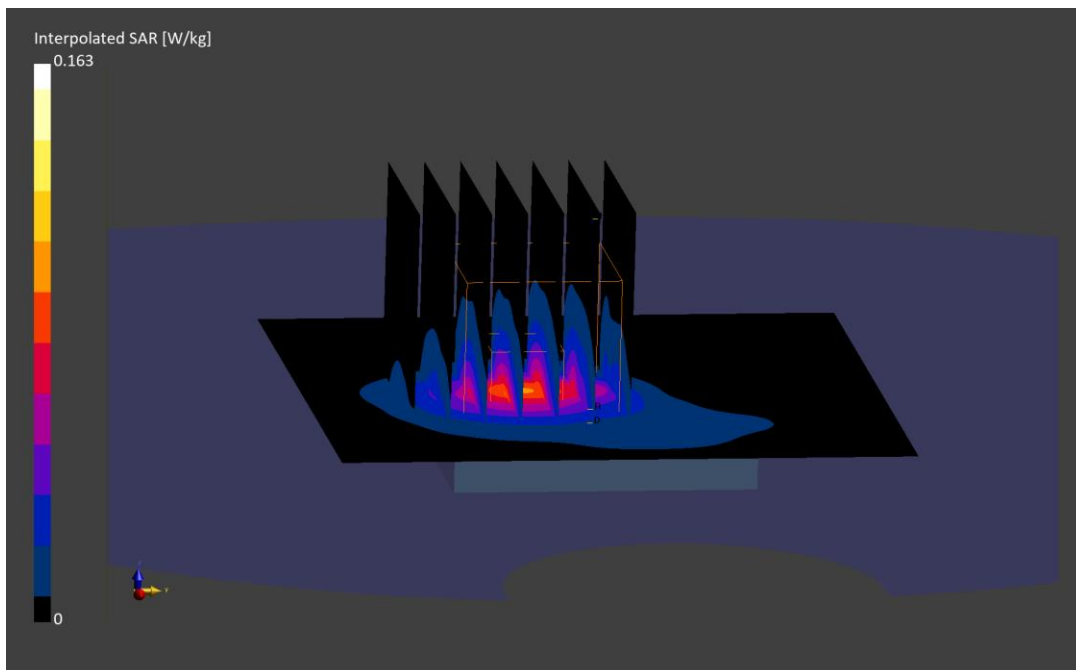

ELEMENT

DUT: BCG-A3001; Type: Watch; Serial: TWF7C

Communication System: UID:0 - -, CW; MAIA: Y; Frequency: 5728.8 MHz
Medium: 5200-5800 Head; Medium parameters used:
f = 5728.8 MHz; cond = 5.16 S/m; perm = 34.8; density = 1000 kg/m³
Phantom Section: Flat; Space: 0 mm

Test Date: 06/17/2024; Ambient Temp: 21.2°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7427; ConvF:(4.35,4.78,4.93); Calibrated: 2024-02-09
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn467; Calibrated: 2024-02-09
Phantom: Twin-SAM V8.0; Serial: 2070
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: 802.15.4 ab-NB, Exp: Extremity| Back Side, Ch. Low, 1 Mbps,
Aluminum, Metal Links Wristband**

Area Scan (80.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (24.0 x 24.0 x 22.0): Measurement grid: dx=4.0 mm, dy=4.0 mm, dz=1.4 mm; Graded Ratio: 1.4


Reference Value = -0.01 W/kg; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.059 W/kg

SAR(10 g) = 0 W/kg

Smallest distance from peaks to all points 3 dB below is 4.0 mm

Ratio of SAR at M2 to SAR at M1 = 80.6 %

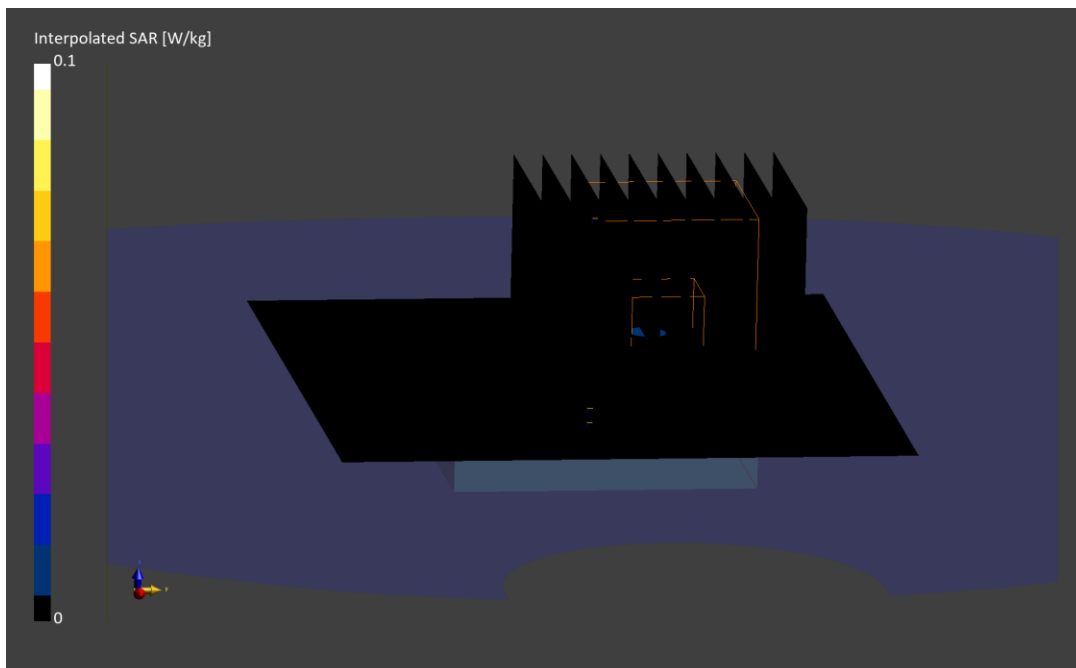

ELEMENT

DUT: BCG-A3001; Type: Watch; Serial: NXP2D

Communication System: UID:0 - -, CW; MAIA: Y; Frequency: 13.6 MHz
Medium: 30 Head; Medium parameters used:
f = 13.6 MHz; cond = 0.757 S/m; perm = 53.5; density = 1000 kg/m³
Phantom Section: Flat; Space: 0 mm


Test Date: 07/01/2024; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN3746; ConvF:(16.19,16.19,16.19); Calibrated: 2023-10-16
Sensor-Surface: 1.4mm (All points)
Electronics: DAE4 Sn1237; Calibrated: 2023-10-18
Phantom: ELI V6.0; Serial: 2003
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: NFC, Exp: Extremity| Back Side,
Aluminum, Sport Wristband**

Area Scan (90.0 x 90.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5
Reference Value = -0.00 W/kg; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.002 W/kg
SAR(10 g) = 0 W/kg
Smallest distance from peaks to all points 3 dB below is N/A
Ratio of SAR at M2 to SAR at M1 = 52.2 %

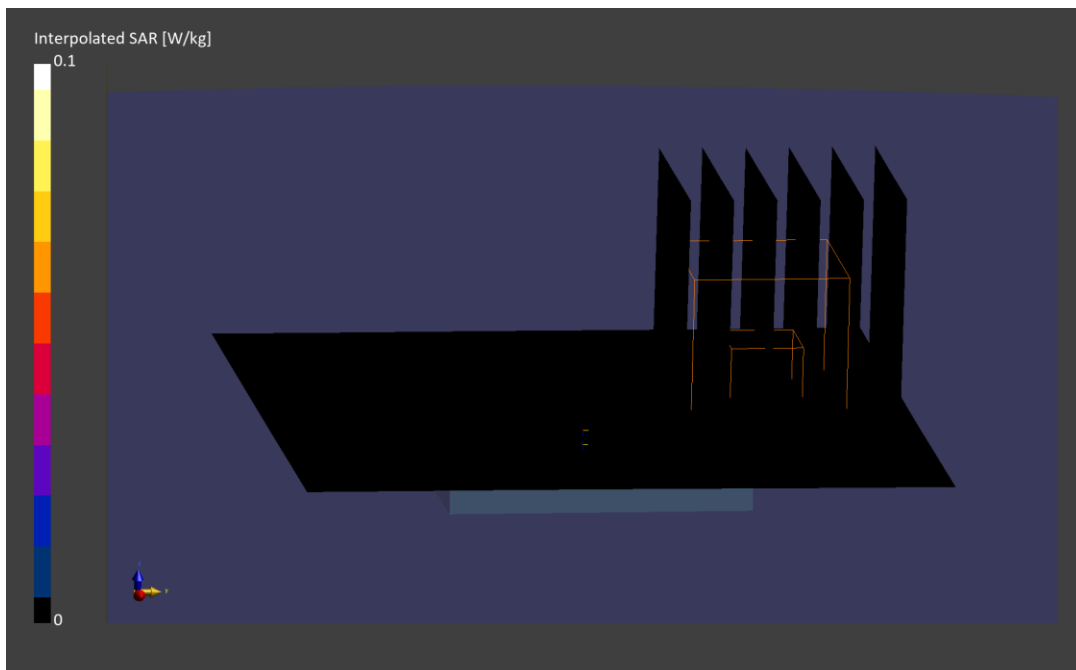

ELEMENT

DUT: BCG-A3001; Type: Watch; Serial: 9TVDQ

Communication System: UID:0 - -, CW; MAIA: Y; Frequency: 7987.2 MHz
Medium: 6000 Head; Medium parameters used:
f = 7987.2 MHz; cond = 7.74 S/m; perm = 33.2; density = 1000 kg/m³
Phantom Section: Flat; Space: 0 mm

Test Date: 07/08/2024; Ambient Temp: 21.2°C; Tissue Temp: 19.7°C

Probe: EX3DV4 - SN7421; ConvF:(5.25,5.25,5.25); Calibrated: 2024-03-11
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn604; Calibrated: 2024-03-06
Phantom: Twin-SAM V8.0; Serial: 2067
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: UWB, Exp: Extremity| Back Side, Ch. 9,
Aluminum, Metal Loop Wristband**

Area Scan (90.0 x 105.0): Measurement grid: dx=7.5 mm, dy=7.5 mm

Zoom Scan (24.0 x 24.0 x 22.0): Measurement grid: dx=3.0 mm, dy=3.0 mm, dz=1.4 mm; Graded Ratio: 1.4


Reference Value = -0.01 W/kg; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.031 W/kg

SAR(10 g) = 0.002 W/kg; APD(4 cm²) = 0.059 W/m²

Smallest distance from peaks to all points 3 dB below is N/A

Ratio of SAR at M2 to SAR at M1 = 36.3 %

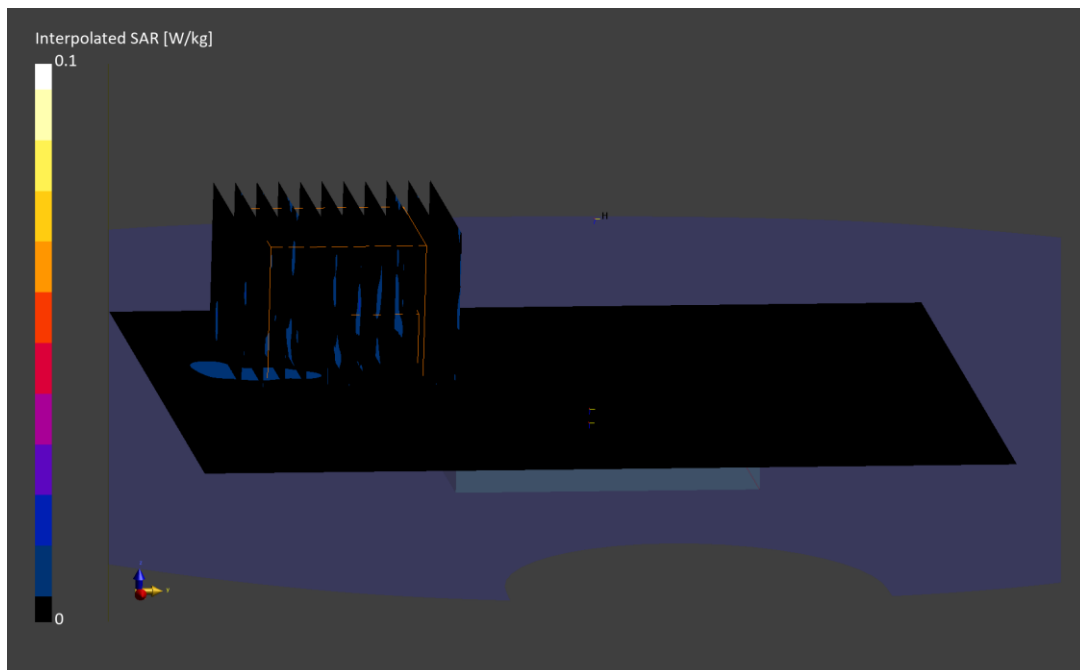

ELEMENT

Date: 07/03/2024

Mode: UWB, Exp: Extremity| Back side, Ch.5, Aluminum, Sport Wristband

Device Under Test Properties

DUT	Serial Number	DUT Type
BCG-A3001	9TVDQ	Watch

Exposure Conditions

Phantom Section	Position	Test Distance [mm]	Channel	Group, UID	Frequency [MHz]
5G	BACK	2.00	5	0	6489.6

Hardware Setup

Probe, Calibration Date	DAE, Calibration Date
EUmmWV4 - SN9487, 04/08/2024	DAE4 - SN793, 10/18/2023

Software Setup

Software	Software Version
cDASY6 Module mmWave	3.2.0.1840

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	25.0 x 25.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Avg. Area [cm ²]	4.00
pS _{tot} avg [W/m ²]	0.232
pS _n avg [W/m ²]	0.186
E _{peak} [V/m]	11.3
Power Drift [dB]	-0.07

