




ELEMENT MATERIALS TECHNOLOGY

(Formerly PCTEST)
18855 Adams Court, Morgan Hill, CA 95037, USA
Tel. +1.408.538.5600
http://www.element.com



SAR EVALUATION REPORT

Applicant Name:
Apple Inc.
One Apple Park Way
Cupertino, CA 95014 USA

Date of Testing:
07/24/2024 – 08/19/2024
Test Report Issue Date:
08/21/2024
Test Site/Location:
Element, Morgan Hill, CA, USA
Document Serial No.:
1C2405230024-01.BCG-R1

FCC ID: BCG-A3053

APPLICANT: APPLE, INC.

DUT Type: Wireless Earbud
Application Type: Certification
FCC Rule Part(s): CFR §2.1093
Model: A3053

Equipment Class	Band & Mode	Tx Frequency	SAR	
			1g Head (W/kg)	1g Body-Worn (W/kg)
DSS/DTS	2.4 GHz Bluetooth	2402 - 2480 MHz	0.11	0.64
NII	NB U-NII 1	5157 - 5245 MHz	<0.1	0.77
NII	NB U-NII 3	5731 - 5844 MHz	<0.1	1.19
6VL	NB U-NII 5	6108 - 6420 MHz	<0.1	0.28
Equipment Class	Band & Mode	Tx Frequency	APD (W/m²)	APD (W/m²)
6VL	NB U-NII 5	6108 - 6420 MHz	0.22	0.92
Equipment Class	Band & Mode	Tx Frequency	Reported PD (W/m²)	Reported PD (W/m²)
6VL	NB U-NII 5	6108 - 6420 MHz	0.24	1.17

Note: This revised Test Report supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.6 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.

RJ Ortanez
Executive Vice President



The SAR Tick is an initiative of the Mobile & Wireless Forum (MWF). While a product may be considered eligible, use of the SAR Tick logo requires an agreement with the MWF. Further details can be obtained by emailing: sartick@mwfai.info.

FCC ID: BCG-A3053	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2405230024-01.BCG-R1	DUT Type: Wireless Earbud	Page 1 of 32

REV 23.0
07/10/2024

TABLE OF CONTENTS

1	DEVICE UNDER TEST	3
2	INTRODUCTION	6
3	DOSIMETRIC ASSESSMENT	7
4	TEST CONFIGURATION POSITIONS	8
5	RF EXPOSURE LIMITS	9
6	FCC MEASUREMENT PROCEDURES.....	11
7	RF CONDUCTED POWERS.....	12
8	SYSTEM VERIFICATION.....	17
9	SAR DATA SUMMARY	20
10	SAR MEASUREMENT VARIABILITY	25
11	EQUIPMENT LIST.....	26
12	MEASUREMENT UNCERTAINTIES.....	27
13	CONCLUSION.....	30
14	REFERENCES	31
APPENDIX A: SAR TEST PLOTS		
APPENDIX B: SAR DIPOLE VERIFICATION PLOTS		
APPENDIX C: PROBE AND DIPOLE CALIBRATION CERTIFICATES		
APPENDIX D: SAR TISSUE SPECIFICATIONS		
APPENDIX E: SAR SYSTEM VALIDATION		
APPENDIX F: DUT ANTENNA DIAGRAM & SAR TEST SETUP PHOTOGRAPHS		

FCC ID: BCG-A3053	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2405230024-01.BCG-R1	DUT Type: Wireless Earbud	Page 2 of 32

REV 23.0
07/10/2024

1 DEVICE UNDER TEST

1.1 Device Overview

Band & Mode	Operating Modes	Tx Frequency
2.4 GHz Bluetooth	Data	2402 - 2480 MHz
NB U-NII 1	Data	5157 - 5245 MHz
NB U-NII 3	Data	5731 - 5844 MHz
NB U-NII 5	Data	6108 - 6420 MHz

1.2 Power Reduction for SAR

There is no power reduction used for any band/mode implemented in this device for SAR purposes.

1.3 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D04v01.

1.3.1 Maximum Output Power

Mode / Band	Duty Cycle	Modulated Average (dBm)	
		Maximum	Nominal
2.4 GHz Bluetooth BDR	34%	Maximum	12.50
		Nominal	11.50
2.4 GHz Bluetooth EDR	77%	Maximum	9.50
		Nominal	8.50
2.4 GHz Bluetooth HDR4/8	77%	Maximum	9.50
		Nominal	8.50
2.4 GHz Bluetooth HDRp4/8	100%	Maximum	9.50
		Nominal	8.50
2.4 Bluetooth LE1M	100%	Maximum	10.50
		Nominal	9.50
2.4 Bluetooth LE2M	15%	Maximum	10.50
		Nominal	9.50

FCC ID: BCG-A3053	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2405230024-01.BCG-R1	DUT Type: Wireless Earbud	Page 3 of 32

REV 23.0
07/10/2024

Mode / Band	Duty Cycle	Modulated Average (dBm)	
		Maximum	Nominal
NB UNII-1 BDR	34%	Maximum	9.00
		Nominal	8.00
NB UNII-1 HDR4/8 1-Slot	34%	Maximum	9.00
		Nominal	8.00
NB UNII-1 HDR4/8 3/5-Slot	77%	Maximum	6.00
		Nominal	5.00
NB UNII-1 HDRp4/8	100%	Maximum	6.00
		Nominal	5.00
NB UNII-1 LE2M	15%	Maximum	10.00
		Nominal	9.00

Mode / Band	Duty Cycle	Modulated Average (dBm)	
		Maximum	Nominal
NB UNII-3 BDR	34%	Maximum	10.00
		Nominal	9.00
NB UNII-3 HDR4/8 1-Slot	34%	Maximum	9.50
		Nominal	8.50
NB UNII-3 HDR4/8 3/5-Slot	77%	Maximum	6.50
		Nominal	5.50
NB UNII-3 HDRp4/8	100%	Maximum	6.50
		Nominal	5.50
NB UNII-3 LE2M	15%	Maximum	11.00
		Nominal	10.00

Mode / Band	Duty Cycle	Modulated Average (dBm)	
		Maximum	Nominal
NB UNII-5 BDR	34%	Maximum	-3.00
		Nominal	-4.00
NB UNII-5 HDR4 1-Slot	34%	Maximum	-0.50
		Nominal	-1.50
NB UNII-5 HDR8 1-Slot	34%	Maximum	2.00
		Nominal	1.00
NB UNII-5 HDR4 3/5-Slot	77%	Maximum	-0.50
		Nominal	-1.50
NB UNII-5 HDR8 3/5-Slot	77%	Maximum	2.00
		Nominal	1.00
NB UNII-5 HDRp4	100%	Maximum	-0.50
		Nominal	-1.50
NB UNII-5 HDRp8	100%	Maximum	2.00
		Nominal	1.00
NB UNII-5 LE2M	15%	Maximum	-3.00
		Nominal	-4.00

FCC ID: BCG-A3053	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2405230024-01.BCG-R1	DUT Type: Wireless Earbud	Page 4 of 32

REV 23.0
07/10/2024

1.4 DUT Antenna Locations

Based on the expected use conditions, Head SAR was evaluated. Per manufacturer request, Body-Worn SAR was evaluated as an additional conservative SAR test condition. The antenna is located inside BCG-A3053 – which is a wireless Bluetooth earbud for the Left ear. A diagram showing the location of the device antenna can be found in the DUT Antenna Diagram & SAR Test Setup Photographs Appendix. More information about the configurations evaluated for SAR can be found in Section 4.2 and Section 4.3.

1.5 Simultaneous Transmission Capabilities

This Device does not support any Simultaneous transmission Scenarios.

1.6 Guidance Applied

- FCC KDB Publication 447498 D04v01 (General SAR Guidance)
- FCC KDB Publication 865664 D01v01r04, D02v01r02 (SAR Measurements up to 6 GHz)

1.7 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical, and thermal characteristics and are within operational tolerances expected for production units. The serial numbers used for each test are indicated alongside the results in Section 9.

FCC ID: BCG-A3053	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2405230024-01.BCG-R1	DUT Type: Wireless Earbud	Page 5 of 32

REV 23.0
07/10/2024

The FCC and Innovation, Science, and Economic Development Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996, and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

2.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 2-1).

Equation 2-1
SAR Mathematical Equation

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

FCC ID: BCG-A3053	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2405230024-01.BCG-R1	DUT Type: Wireless Earbud	Page 6 of 32

REV 23.0
07/10/2024

3

DOSIMETRIC ASSESSMENT

3.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface, and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 3-3-1) and IEEE 1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 3-3-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the cDASY6 manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 3-3-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.




Figure 3-1
Sample SAR Area Scan

Table 3-3-1
Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04*

Frequency	Maximum Area Scan Resolution (mm) ($\Delta x_{\text{area}}, \Delta y_{\text{area}}$)	Maximum Zoom Scan Resolution (mm) ($\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$)	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x, y, z)
			Uniform Grid	Graded Grid		
			$\Delta z_{\text{zoom}}(n)$	$\Delta z_{\text{zoom}}(1)^*$	$\Delta z_{\text{zoom}}(n>1)^*$	
≤ 2 GHz	≤ 15	≤ 8	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
2-3 GHz	≤ 12	≤ 5	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
3-4 GHz	≤ 12	≤ 5	≤ 4	≤ 3	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 28
4-5 GHz	≤ 10	≤ 4	≤ 3	≤ 2.5	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 25
5-6 GHz	≤ 10	≤ 4	≤ 2	≤ 2	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 22

*Also compliant to IEEE 1528-2013 Table 6

FCC ID: BCG-A3053	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2405230024-01.BCG-R1	DUT Type: Wireless Earbud	Page 7 of 32

REV 23.0
07/10/2024

4 TEST CONFIGURATION POSITIONS

4.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$.

4.2 Positioning for Head

This device is a wireless Bluetooth earbud for the left ear which is designed to be used in the ear canal. The antenna is located inside the earbud. SAR was evaluated with a separation distance of 0 mm between the earbud (the ear tip facing the phantom) and the flat phantom. The phantom is filled with head tissue equivalent medium.

4.3 Body-Worn Exposure Conditions

Per manufacturer request, Body-Worn SAR was evaluated as an additional conservative SAR test condition for the left earbud. The DUT was evaluated with a separation distance of 0 mm between the back side of the earbud and the flat phantom. The button side and antenna touching were additionally evaluated. The phantom is filled with head tissue equivalent medium.

FCC ID: BCG-A3053	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2405230024-01.BCG-R1	DUT Type: Wireless Earbud	Page 8 of 32

REV 23.0
07/10/2024

5 RF EXPOSURE LIMITS

5.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e., as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

5.3 RF Exposure Limits for Frequencies Below 6 GHz

**Table 5-1
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6**

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
Peak Spatial Average SAR Head	1.6	8.0
Whole Body SAR	0.08	0.4
Peak Spatial Average SAR Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: BCG-A3053	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2405230024-01.BCG-R1	DUT Type: Wireless Earbud	Page 9 of 32

REV 23.0
07/10/2024

5.4 RF Exposure Limits for Frequencies Above 6 GHz

Per §1.1310 (d)(3), the MPE limits are applied for frequencies above 6 GHz. Power Density is expressed in units of W/m² or mW/cm².

Peak Spatially Averaged Power Density was evaluated over a circular area of 4 cm² per interim FCC Guidance for near-field power density evaluations per October 2018 TCB Workshop notes.

**Table 6-2
Human Exposure Limits Specified in FCC 47 CFR §1.1310**

Human Exposure to Radiofrequency (RF) Radiation Limits		
Frequency Range [MHz]	Power Density [mW/cm ²]	Average Time [Minutes]
(A) Limits For Occupational / Controlled Environments		
1,500 – 100,000	5.0	6
(B) Limits For General Population / Uncontrolled Environments		
1,500 – 100,000	1.0	30

Note: 1.0 mW/cm² is 10 W/m²

FCC ID: BCG-A3053	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2405230024-01.BCG-R1	DUT Type: Wireless Earbud	Page 10 of 32

REV 23.0
07/10/2024

6.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D04v01, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

FCC ID: BCG-A3053	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2405230024-01.BCG-R1	DUT Type: Wireless Earbud	Page 11 of 32

REV 23.0
07/10/2024

7 RF CONDUCTED POWERS

7.1 Bluetooth/NB UNII Conducted Powers

**Table 7-1
Bluetooth Average RF Power**

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	LE1M	1.0	0	9.95	9.886
2441	LE1M	1.0	39	9.77	9.484
2480	LE1M	1.0	78	9.86	9.683

**Table 7-2
NB UNII Average RF Power**


Type	Band	Frequency	Channel	Average
HDRp4	U-NII 1	5157	Low	5.56
		5201	Mid	4.67
		5245	High	4.31
HDRp4	U-NII 3	5731	Low	4.76
		5788	Mid	4.66
		5844	High	4.78
HDRp8	U-NII 5	6108	Low	1.16
		6186	Low-Mid	1.44
		6264	Mid	1.62
		6342	Mid-High	1.75
		6420	High	1.69

FCC ID: BCG-A3053	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2405230024-01.BCG-R1	DUT Type: Wireless Earbud	Page 12 of 32

REV 23.0
07/10/2024

7.2 Bluetooth/NB UNII Duty Cycle Plots

Figure 7-1
2.4 GHz Bluetooth Transmission Plot

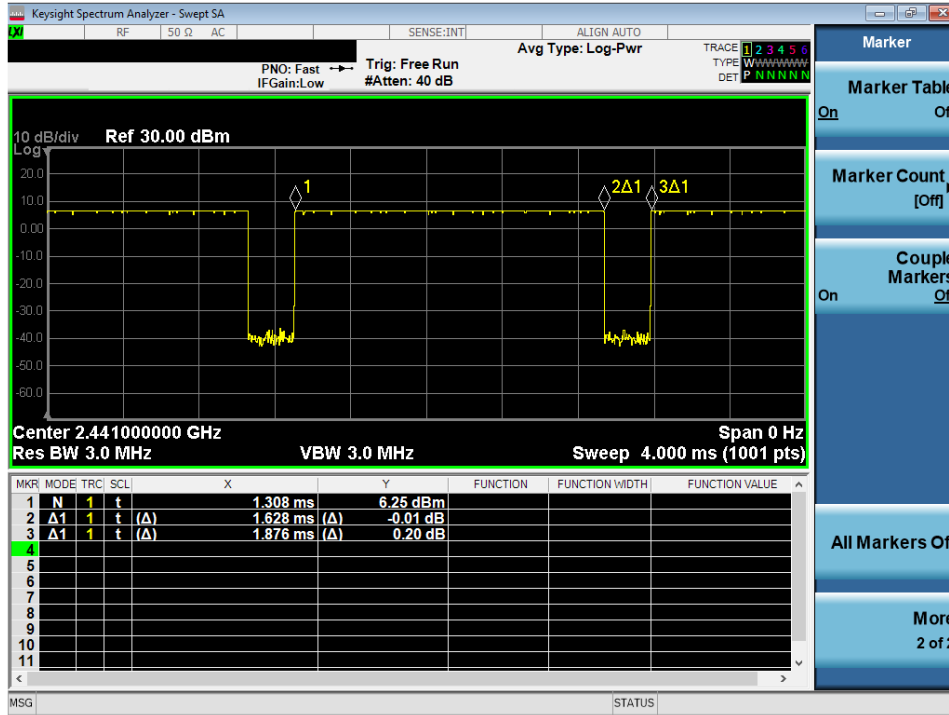


Equation 7-1
2.4 GHz Bluetooth Duty Cycle Calculation

$$Duty\ Cycle = \frac{Pulse\ Width}{Period} * 100\% = \frac{1.628\ ms}{1.876\ ms} * 100\% = 86.78\%$$

FCC ID: BCG-A3053	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2405230024-01.BCG-R1	DUT Type: Wireless Earbud	Page 13 of 32

REV 23.0
07/10/2024

**Figure 7-2
NB UNII-1 Transmission Plot**

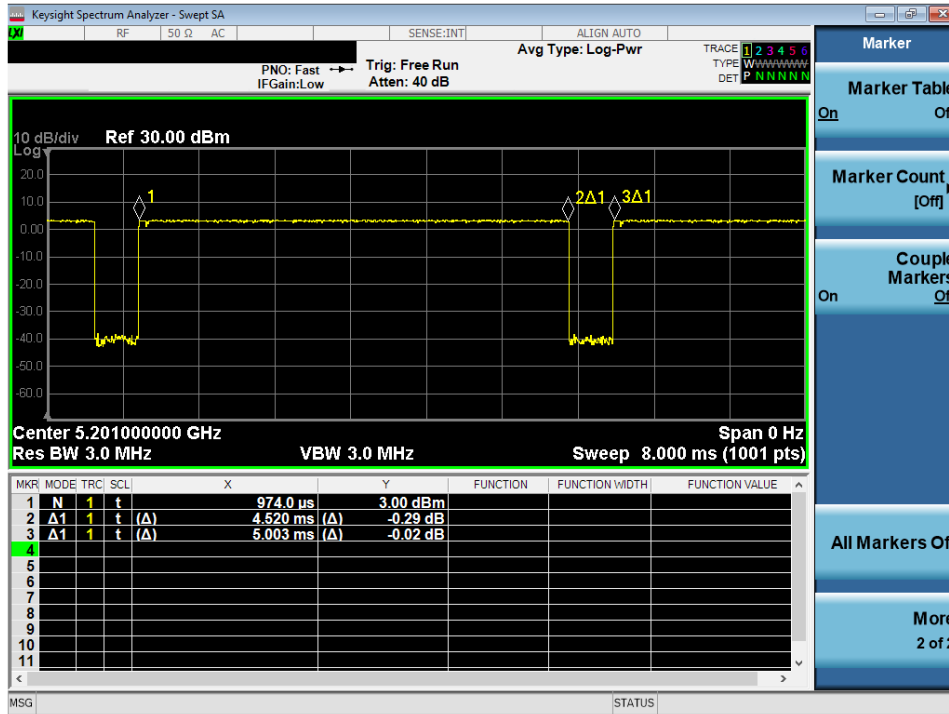


**Equation 7-2
NB UNII-1 Duty Cycle Calculation**

$$Duty\ Cycle = \frac{Pulse\ Width}{Period} * 100\% = \frac{4.520\ ms}{5.003\ ms} * 100\% = 90.35\%$$

FCC ID: BCG-A3053	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2405230024-01.BCG-R1	DUT Type: Wireless Earbud	Page 14 of 32

REV 23.0
07/10/2024

**Figure 7-3
NB UNII-3 Transmission Plot**

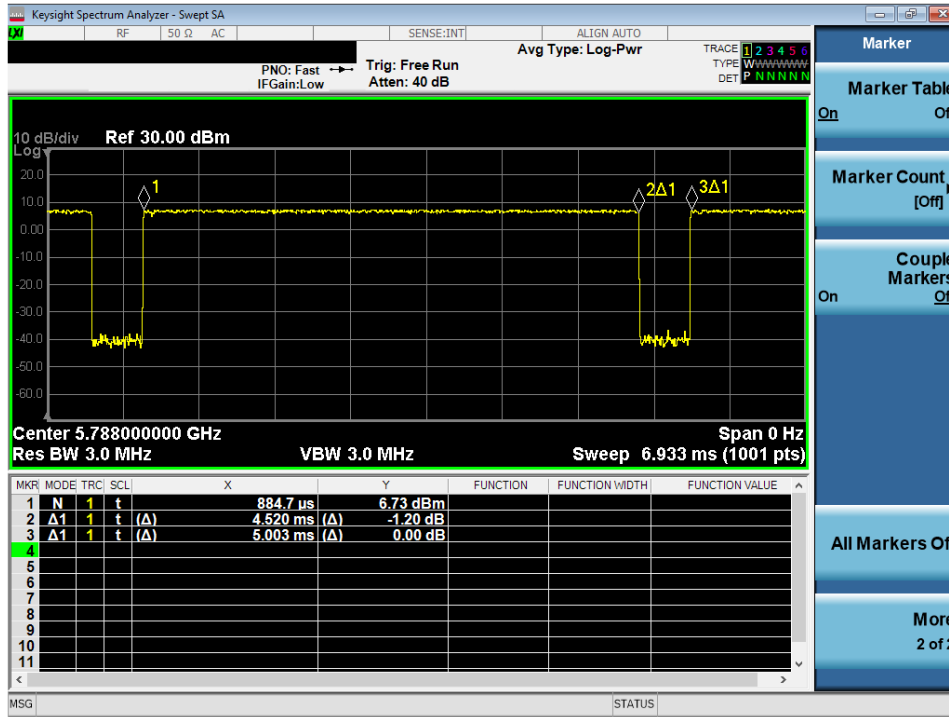


**Equation 7-3
NB UNII-3 Duty Cycle Calculation**

$$Duty\ Cycle = \frac{Pulse\ Width}{Period} * 100\% = \frac{4.520\ ms}{5.003\ ms} * 100\% = 90.35\%$$

FCC ID: BCG-A3053	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2405230024-01.BCG-R1	DUT Type: Wireless Earbud	Page 15 of 32


REV 23.0
07/10/2024

**Figure 7-4
NB UNII-5 Transmission Plot**

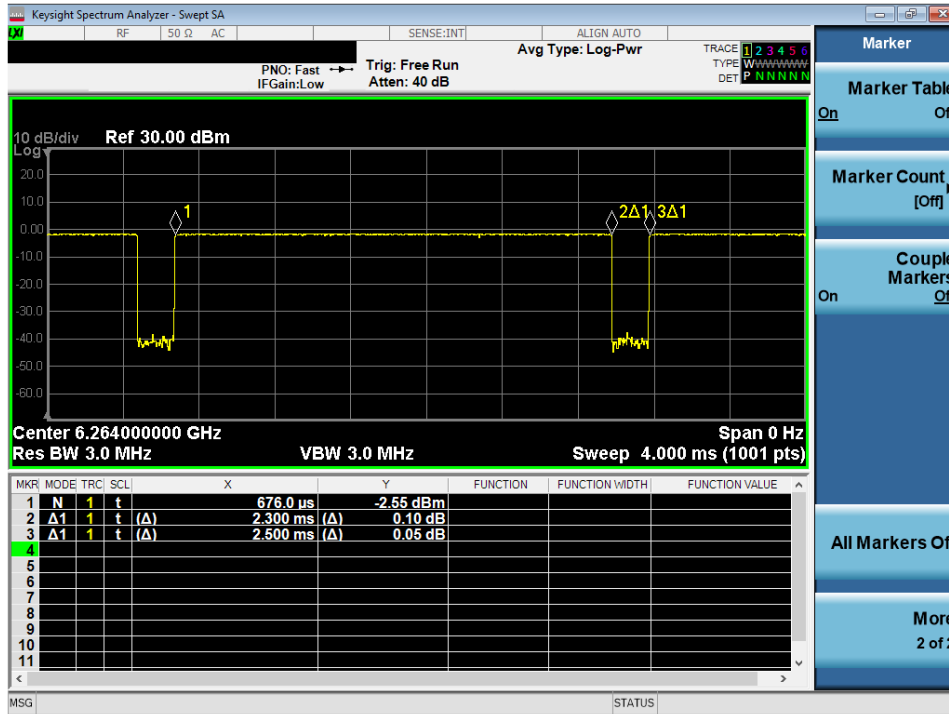

**Equation 7-4
NB UNII-5 Duty Cycle Calculation**

$$Duty\ Cycle = \frac{Pulse\ Width}{Period} * 100\% = \frac{2.300\ ms}{2.500\ ms} * 100\% = 92.00\%$$

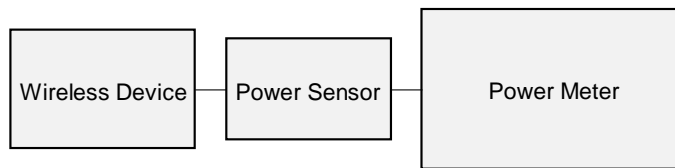

**Figure 7-5
Power Measurement Setup**

FCC ID: BCG-A3053	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2405230024-01.BCG-R1	DUT Type: Wireless Earbud	Page 16 of 32

REV 23.0
07/10/2024

8

SYSTEM VERIFICATION

8.1 Tissue Verification

**Table 8-1
Measured Head Tissue Properties**

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
08/13/2024	2450 Head	23.5	2300	1.685	39.132	1.670	39.500	-0.31%	-0.93%
			2310	1.676	39.085	1.679	39.480	-0.20%	-0.97%
			2320	1.687	39.055	1.687	39.460	0.01%	-1.03%
			2400	1.779	38.759	1.756	39.289	1.28%	-1.35%
			2450	1.837	38.558	1.800	39.200	2.03%	-1.64%
			2480	1.871	38.447	1.833	39.162	2.07%	-1.83%
			2500	1.893	38.372	1.855	39.136	2.04%	-1.95%
			2510	1.905	38.352	1.866	39.123	2.09%	-2.02%
			2535	1.933	38.221	1.893	39.092	2.13%	-2.23%
			2550	1.952	38.153	1.909	39.073	2.24%	-2.35%
			2560	1.963	38.114	1.920	39.060	2.26%	-2.42%
			2600	2.008	37.963	1.964	39.009	2.25%	-2.68%
			2650	2.069	37.746	2.018	38.945	2.51%	-3.06%
			2680	2.104	37.619	2.051	38.907	2.60%	-3.31%
			2700	2.125	37.533	2.073	38.882	2.52%	-3.47%
08/19/2024	2450 Head	23.8	2300	1.692	39.381	1.670	39.500	1.32%	-0.30%
			2310	1.704	39.339	1.679	39.480	1.49%	-0.36%
			2320	1.715	39.299	1.687	39.460	1.66%	-0.41%
			2400	1.804	38.983	1.756	39.289	2.73%	-0.78%
			2450	1.864	38.812	1.800	39.200	3.56%	-0.99%
			2480	1.897	38.686	1.833	39.162	3.49%	-1.22%
			2500	1.919	38.600	1.855	39.136	3.45%	-1.37%
			2510	1.931	38.563	1.866	39.123	3.48%	-1.43%
			2535	1.962	38.473	1.893	39.092	3.65%	-1.58%
			2550	1.980	38.416	1.909	39.073	3.72%	-1.68%
			2560	1.991	38.376	1.920	39.060	3.79%	-1.75%
			2600	2.038	38.202	1.964	39.009	3.77%	-2.07%
			2650	2.102	38.011	2.018	38.945	4.16%	-2.40%
			2680	2.135	37.874	2.051	38.907	4.10%	-2.66%
			2700	2.157	37.795	2.073	38.882	4.05%	-2.80%
07/24/2024	5200-5800 Head	21.0	5150	4.402	35.367	4.604	36.043	-4.38%	-1.90%
			5160	4.417	35.345	4.614	36.031	-4.27%	-1.90%
			5170	4.430	35.337	4.624	36.020	-4.20%	-1.90%
			5180	4.440	35.339	4.635	36.009	-4.21%	-1.88%
			5190	4.447	35.327	4.645	35.998	-4.26%	-1.86%
			5200	4.455	35.303	4.655	35.986	-4.30%	-1.90%
			5210	4.460	35.278	4.666	35.975	-4.41%	-1.94%
			5220	4.468	35.258	4.676	35.963	-4.45%	-1.96%
			5240	4.488	35.201	4.696	35.940	-4.43%	-2.06%
			5250	4.501	35.171	4.706	35.929	-4.36%	-2.11%
			5260	4.513	35.158	4.717	35.917	-4.32%	-2.11%
			5270	4.528	35.157	4.727	35.906	-4.25%	-2.09%
			5280	4.538	35.159	4.737	35.894	-4.20%	-2.05%
			5290	4.548	35.154	4.748	35.883	-4.21%	-2.03%
			5300	4.557	35.144	4.758	35.871	-4.22%	-2.03%
			5310	4.562	35.119	4.768	35.860	-4.32%	-2.07%
			5320	4.568	35.084	4.778	35.849	-4.40%	-2.13%
			5500	4.746	34.783	4.963	35.643	-4.37%	-2.41%
			5510	4.761	34.783	4.973	35.632	-4.26%	-2.38%
			5520	4.775	34.767	4.983	35.620	-4.17%	-2.39%
			5530	4.783	34.748	4.994	35.609	-4.23%	-2.42%
			5540	4.790	34.722	5.004	35.597	-4.26%	-2.40%
			5550	4.798	34.704	5.014	35.586	-4.35%	-2.48%
			5560	4.803	34.680	5.024	35.574	-4.40%	-2.48%
			5580	4.821	34.642	5.045	35.551	-4.44%	-2.56%
			5600	4.848	34.613	5.065	35.529	-4.28%	-2.58%
			5610	4.862	34.605	5.076	35.518	-4.22%	-2.57%
			5620	4.878	34.586	5.086	35.506	-4.09%	-2.59%
			5640	4.899	34.543	5.106	35.483	-4.05%	-2.64%
			5660	4.914	34.524	5.127	35.460	-4.15%	-2.64%
			5670	4.920	34.515	5.137	35.449	-4.22%	-2.63%
			5680	4.926	34.499	5.147	35.437	-4.29%	-2.65%
			5690	4.935	34.475	5.158	35.426	-4.32%	-2.68%
			5700	4.951	34.448	5.168	35.414	-4.20%	-2.73%
			5710	4.967	34.417	5.178	35.403	-4.07%	-2.79%
5720	4.978	34.395	5.188	35.391	-4.05%	-2.81%			
5745	5.010	34.377	5.214	35.363	-3.91%	-2.79%			
5750	5.016	34.375	5.219	35.357	-3.88%	-2.78%			
5755	5.023	34.370	5.224	35.351	-3.85%	-2.78%			
5765	5.030	34.365	5.234	35.340	-3.90%	-2.79%			
5775	5.033	34.344	5.245	35.329	-4.04%	-2.79%			
5785	5.038	34.335	5.255	35.317	-4.13%	-2.78%			
5795	5.047	34.319	5.265	35.305	-4.14%	-2.79%			
5800	5.053	34.303	5.270	35.300	-4.12%	-2.82%			
5805	5.060	34.284	5.275	35.294	-4.08%	-2.86%			
5825	5.080	34.229	5.296	35.271	-4.06%	-2.95%			
5835	5.093	34.228	5.305	35.230	-4.00%	-2.84%			
5845	5.109	34.211	5.315	35.210	-3.88%	-2.84%			
5850	5.117	34.198	5.320	35.200	-3.82%	-2.85%			
5855	5.123	34.181	5.325	35.197	-3.79%	-2.89%			
5865	5.130	34.170	5.336	35.190	-3.86%	-2.90%			
5905	5.162	34.141	5.379	35.163	-4.03%	-2.91%			

FCC ID: BCG-A3053	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2405230024-01.BCG-R1	DUT Type: Wireless Earbud	Page 17 of 32

REV 23.0
07/10/2024


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

8.2 Test System Verification

Prior to SAR assessment, the system is verified to $\pm 10\%$ of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in the SAR System Validation Appendix.

**Table 8-2
System Verification Results – 1g**

System Verification TARGET & MEASURED																					
SAR System	Tissue Frequency (MHz)	Tissue Type	Date	Amb. Temp. (C)	Liquid Temp. (C)	Input Power (W)	Source SN	Probe SN	DAE	Measured SAR 1g (W/kg)	1W Target SAR 1g (W/kg)	1W Normalized SAR 1g (W/kg)	Deviation 1g (%)	Measured 4cm ² APD (W/m ²)	1W Target 4cm ² APD (W/m ²)	1W Normalized 4cm ² APD (W/m ²)	Deviation 4cm ² APD (%)				
AM6	2450	HEAD	08/13/2024	22.5	22.5	0.10	855	7499	1644	5.290	52.400	52.900	0.95%								
AM6	2450	HEAD	08/19/2024	20.1	24.0	0.10	750	7499	1644	5.060	52.600	50.600	-3.80%								
AM9	5250	HEAD	07/24/2024	21.5	21.4	0.05	1163	3746	1237	3.680	79.600	73.600	-7.54%								
AM9	5250	HEAD	07/29/2024	21.7	20.0	0.05	1123	3746	1237	3.850	79.400	77.000	-3.02%								
AM9	5600	HEAD	07/24/2024	21.5	21.4	0.05	1123	3746	1237	3.990	82.500	79.800	-3.27%								
AM9	5600	HEAD	07/29/2024	21.7	20.0	0.05	1123	3746	1237	3.980	82.500	79.600	-3.52%								
AM9	5750	HEAD	07/24/2024	21.5	21.4	0.05	1123	3746	1237	3.740	79.400	74.800	-5.79%								
AM9	5750	HEAD	07/29/2024	21.7	20.0	0.05	1123	3746	1237	3.850	79.400	77.000	-3.02%								
AM9	5850	HEAD	07/24/2024	21.5	21.4	0.05	1163	3746	1237	3.690	79.000	73.800	-6.58%								
AM9	5850	HEAD	07/29/2024	21.7	20.0	0.05	1123	3746	1237	3.790	80.100	75.800	-5.37%								
AM2	6500	HEAD	08/14/2024	21.2	20.3	0.025	1019	7420	1333	7.320	293.000	292.800	-0.07%					32.8	1320	1312	-0.61%

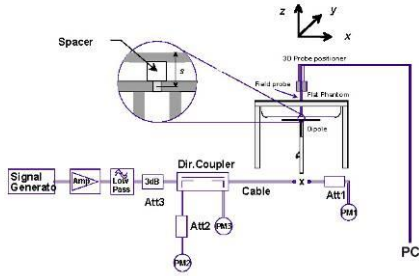

**Figure 8-1
System Verification Setup Diagram**



**Figure 8-2
System Verification Setup Photo**

FCC ID: BCG-A3053	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2405230024-01.BCG-R1	DUT Type: Wireless Earbud	Page 19 of 32

REV 23.0
07/10/2024

8.3 Power Density Test System Verification

The system was verified to be within ± 0.66 dB of the power density targets on the calibration certificate according to the test system specification in the user's manual and calibration facility recommendation. The 0.66 dB deviation threshold represents the expanded uncertainty for system performance checks using SPEAG's mmWave verification sources. The same spatial resolution and measurement region used in the source calibration was applied during the system check.

The measured power density distribution of verification source was also confirmed through visual inspection to have no noticeable differences, both spatially (shape) and numerically (level) from the distribution provided by the manufacturer, per November 2017 TCBC Workshop Notes.

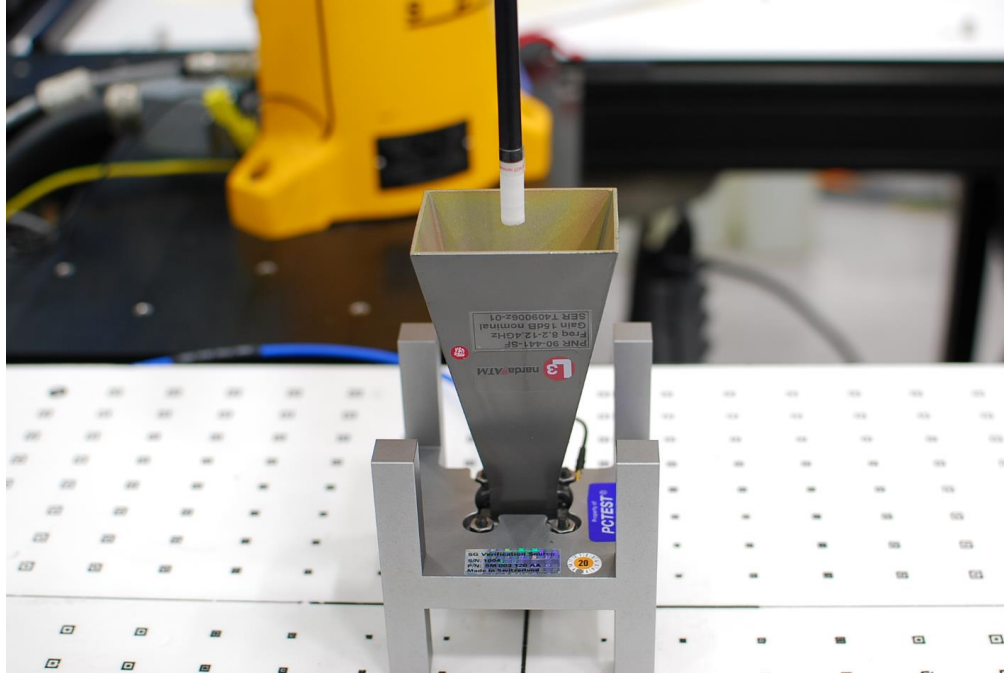


Figure 8-3
System Verification Setup Photo

Table 8-3
10 GHz Verification Results

System Verification												
System	Frequency (GHz)	Date	Source S/N	Probe S/N	DAE S/N	Prad (mW)	Normal psPD (W/m ² over 4 cm ²)		Deviation (dB)	Total psPD (W/m ² over 4 cm ²)		Deviation (dB)
							Measured	Target		Measured	Target	
AM5	10	08/17/2024	1006	9487	1582	93.3	67.10	58.50	0.60	67.20	58.90	0.57

Note: A **10 mm distance spacing** was used from the reference horn antenna aperture to the probe element.

FCC ID: BCG-A3053	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2405230024-01.BCG-R1	DUT Type: Wireless Earbud	Page 20 of 32

REV 23.0
07/10/2024

9

SAR DATA SUMMARY

9.1 2.4 GHz Bluetooth SISO Standalone Head SAR

Table 9-1

Exposure	Band / Mode	Earbud	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Plot #
Head	2.4 GHz Bluetooth	Left	HSRH71002DM0000830	86.78	-0.02	2402	0	1	10.50	9.95	Front	0	0.069	1.135	1.152	0.090	
Head	2.4 GHz Bluetooth	Left	HSRH71002DM0000830	86.78	-0.11	2441	39	1	10.50	9.77	Front	0	0.080	1.183	1.152	0.109	A1
Head	2.4 GHz Bluetooth	Left	HSRH71002DM0000830	86.78	-0.10	2480	78	1	10.50	9.86	Front	0	0.079	1.159	1.152	0.106	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population													Head 1.6 W/kg (mW/g) averaged over 1 gram				

Note: The reported SAR was scaled to 100% transmission duty factor.

9.2 NB-UNII 1 SISO Standalone Head SAR

Table 9-2

Exposure	Band / Mode	Earbud	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Plot #
Head	NB U-NII 1	Left	HSRH71002DM0000830	90.35	0.03	5245	High	4	6.00	4.31	Front	0	0.027	1.476	1.107	0.044	
Head	NB U-NII 1	Left	HSRH71002DM0000830	90.35	0.10	5157	Low	4	6.00	5.56	Front	0	0.028	1.107	1.107	0.034	
Head	NB U-NII 1	Left	HSRH71002DM0000830	90.35	0.05	5201	Mid	4	6.00	4.67	Front	0	0.027	1.358	1.107	0.041	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population													Head 1.6 W/kg (mW/g) averaged over 1 gram				

Note: The reported SAR was scaled to 100% transmission duty factor.

9.3 NB-UNII 3 SISO Standalone Head SAR

Table 9-3

Exposure	Band / Mode	Earbud	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Plot #
Head	NB U-NII 3	Left	HSRH71002DM0000830	90.35	0.02	5844	High	4	6.50	4.78	Front	0	0.050	1.486	1.107	0.082	A2
Head	NB U-NII 3	Left	HSRH71002DM0000830	90.35	0.01	5731	Low	4	6.50	4.76	Front	0	0.027	1.493	1.107	0.045	
Head	NB U-NII 3	Left	HSRH71002DM0000830	90.35	0.06	5788	Mid	4	6.50	4.66	Front	0	0.040	1.528	1.107	0.068	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population													Head 1.6 W/kg (mW/g) averaged over 1 gram				

Note: The reported SAR was scaled to 100% transmission duty factor.

9.4 NB-UNII 5 SISO Standalone Head SAR

Table 9-4

Exposure	Band / Mode	Earbud	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Plot #
Head	NB U-NII 5	Left	HSRH71002DM0000830	92.00	0.09	6420	High	8	2.00	1.69	Front	0	0.026	1.074	1.087	0.030	
Head	NB U-NII 5	Left	HSRH71002DM0000830	92.00	0.01	6108	Low	8	2.00	1.16	Front	0	0.027	1.213	1.087	0.036	A3
Head	NB U-NII 5	Left	HSRH71002DM0000830	92.00	0.06	6186	Low-Mid	8	2.00	1.44	Front	0	0.024	1.138	1.087	0.030	
Head	NB U-NII 5	Left	HSRH71002DM0000830	92.00	0.06	6264	Mid	8	2.00	1.62	Front	0	0.024	1.091	1.087	0.028	
Head	NB U-NII 5	Left	HSRH71002DM0000830	92.00	0.07	6342	Mid-High	8	2.00	1.75	Front	0	0.025	1.059	1.087	0.029	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population													Head 1.6 W/kg (mW/g) averaged over 1 gram				

Note: The reported SAR was scaled to 100% transmission duty factor.

Exposure	Band / Mode	Earbud	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured APD [W/m ² (4cm ²)]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported APD [W/m ² (4cm ²)]
Head	NB U-NII 5	Left	HSRH71002DM0000830	92.00	0.09	6420	High	8	2.00	1.69	Front	0	0.120	1.074	1.087	0.140
Head	NB U-NII 5	Left	HSRH71002DM0000830	92.00	0.01	6108	Low	8	2.00	1.16	Front	0	0.169	1.213	1.087	0.223
Head	NB U-NII 5	Left	HSRH71002DM0000830	92.00	0.06	6186	Low-Mid	8	2.00	1.44	Front	0	0.141	1.138	1.087	0.174
Head	NB U-NII 5	Left	HSRH71002DM0000830	92.00	0.06	6264	Mid	8	2.00	1.62	Front	0	0.114	1.091	1.087	0.135
Head	NB U-NII 5	Left	HSRH71002DM0000830	92.00	0.07	6342	Mid-High	8	2.00	1.75	Front	0	0.135	1.059	1.087	0.155

Note: The reported SAR was scaled to 100% transmission duty factor.

FCC ID: BCG-A3053	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2405230024-01.BCG-R1	DUT Type: Wireless Earbud	Page 21 of 32

REV 23.0
07/10/2024

9.5 2.4 GHz Bluetooth SISO Standalone Body-Worn SAR

Table 9-5

Exposure	Band / Mode	Earbud	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Plot #
Body-worn	2.4 GHz Bluetooth	Left	HSRH71002DM0000B30	86.78	-0.17	2402	0	1	10.50	9.95	Back	0	0.402	1.135	1.152	0.526	
Body-worn	2.4 GHz Bluetooth	Left	HSRH71002DM0000B30	86.78	-0.09	2402	0	1	10.50	9.95	Antenna Touching	0	0.452	1.135	1.152	0.591	
Body-worn	2.4 GHz Bluetooth	Left	HSRH71002DM0000B30	86.78	-0.03	2402	0	1	10.50	9.95	Button	0	0.491	1.135	1.152	0.642	A4
Body-worn	2.4 GHz Bluetooth	Left	HSRH71002DM0000B30	86.78	-0.05	2441	39	1	10.50	9.77	Button	0	0.453	1.183	1.152	0.618	
Body-worn	2.4 GHz Bluetooth	Left	HSRH71002DM0000B30	86.78	-0.07	2480	78	1	10.50	9.86	Button	0	0.403	1.159	1.152	0.538	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT												Body 1.6 W/kg (mW/g) averaged over 1 gram					
Spatial Peak Uncontrolled Exposure/General Population																	

Note: The reported SAR was scaled to 100% transmission duty factor.

9.6 5 GHz NB-UNII 1 Standalone Body-Worn SAR

Table 9-6

Exposure	Band / Mode	Earbud	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Plot #
Body-worn	NB U-NII 1	Left	HSRH71002DM0000B30	90.35	-0.10	5245	High	4	6.00	4.31	Back	0	0.470	1.476	1.107	0.768	
Body-worn	NB U-NII 1	Left	HSRH71002DM0000B30	90.35	0.05	5157	Low	4	6.00	5.56	Back	0	0.527	1.107	1.107	0.646	
Body-worn	NB U-NII 1	Left	HSRH71002DM0000B30	90.35	-0.06	5201	Mid	4	6.00	4.67	Back	0	0.501	1.358	1.107	0.753	
Body-worn	NB U-NII 1	Left	HSRH71002DM0000B30	90.35	-0.08	5157	Low	4	6.00	5.56	Antenna Touching	0	0.450	1.107	1.107	0.551	
Body-worn	NB U-NII 1	Left	HSRH71002DM0000B30	90.35	0.06	5157	Low	4	6.00	5.56	Button	0	0.155	1.107	1.107	0.190	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT												Body 1.6 W/kg (mW/g) averaged over 1 gram					
Spatial Peak Uncontrolled Exposure/General Population																	

Note: The reported SAR was scaled to 100% transmission duty factor.

9.7 5 GHz NB-UNII 3 Standalone Body-Worn SAR

Table 9-7

Exposure	Band / Mode	Earbud	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Plot #
Body-worn	NB U-NII 3	Left	HSRH71002DM0000B30	90.35	-0.06	5844	High	4	6.50	4.78	Back	0	0.721	1.486	1.107	1.186	A5
Body-worn	NB U-NII 3	Left	HSRH71002DM0000B30	90.35	-0.04	5731	Low	4	6.50	4.76	Back	0	0.552	1.493	1.107	0.912	
Body-worn	NB U-NII 3	Left	HSRH71002DM0000B30	90.35	-0.02	5788	Mid	4	6.50	4.66	Back	0	0.668	1.528	1.107	1.130	
Body-worn	NB U-NII 3	Left	HSRH71002DM0000B30	90.35	-0.09	5844	High	4	6.50	4.78	Antenna Touching	0	0.619	1.486	1.107	1.018	
Body-worn	NB U-NII 3	Left	HSRH71002DM0000B30	90.35	0.03	5844	High	4	6.50	4.78	Button	0	0.354	1.486	1.107	0.582	
Body-worn	NB U-NII 3	Left	HSRH71002DM0000B30	90.35	-0.11	5731	Low	4	6.50	4.76	Antenna Touching	0	0.470	1.493	1.107	0.777	
Body-worn	NB U-NII 3	Left	HSRH71002DM0000B30	90.35	-0.07	5788	Mid	4	6.50	4.66	Antenna Touching	0	0.562	1.528	1.107	0.950	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT												Body 1.6 W/kg (mW/g) averaged over 1 gram					
Spatial Peak Uncontrolled Exposure/General Population																	

Note: The reported SAR was scaled to 100% transmission duty factor.

FCC ID: BCG-A3053	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2405230024-01.BCG-R1	DUT Type: Wireless Earbud	Page 22 of 32

REV 23.0
07/10/2024

9.8 5 GHz NB-UNII 5 Standalone Body-Worn SAR

Table 9-8

Exposure	Band / Mode	Earbud	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Plot #
Body-worn	NB U-NII 5	Left	H5RH71002DM0000830	92.00	-0.07	6420	High	8	2.00	1.69	Back	0	0.228	1.074	1.087	0.266	
Body-worn	NB U-NII 5	Left	H5RH71002DM0000830	92.00	-0.06	6108	Low	8	2.00	1.16	Back	0	0.188	1.213	1.087	0.248	
Body-worn	NB U-NII 5	Left	H5RH71002DM0000830	92.00	-0.03	6186	Low-Mid	8	2.00	1.44	Back	0	0.211	1.138	1.087	0.251	
Body-worn	NB U-NII 5	Left	H5RH71002DM0000830	92.00	-0.16	6264	Mid	8	2.00	1.62	Back	0	0.206	1.091	1.087	0.244	
Body-worn	NB U-NII 5	Left	H5RH71002DM0000830	92.00	0.02	6342	Mid-High	8	2.00	1.75	Back	0	0.247	1.059	1.087	0.284	A6
Body-worn	NB U-NII 5	Left	H5RH71002DM0000830	92.00	-0.21	6342	Mid-High	8	2.00	1.75	Button	0	0.090	1.059	1.087	0.104	
Body-worn	NB U-NII 5	Left	H5RH71002DM0000830	92.00	-0.21	6342	Mid-High	8	2.00	1.75	Antenna Touching	0	0.157	1.059	1.087	0.181	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Body 1.6 W/kg (mW/g) averaged over 1 gram					

Exposure	Band / Mode	Earbud	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured APD [W/m ² (4cm ²)]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported APD [W/m ² (4cm ²)]
Body-worn	NB U-NII 5	Left	H5RH71002DM0000830	92.00	-0.07	6420.00	High	8	2.00	1.69	Back	0	0.720	1.074	1.087	0.841
Body-worn	NB U-NII 5	Left	H5RH71002DM0000830	92.00	-0.06	6108.00	Low	8	2.00	1.16	Back	0	0.626	1.213	1.087	0.825
Body-worn	NB U-NII 5	Left	H5RH71002DM0000830	92.00	-0.03	6186.00	Low-Mid	8	2.00	1.44	Back	0	0.692	1.138	1.087	0.856
Body-worn	NB U-NII 5	Left	H5RH71002DM0000830	92.00	-0.16	6264.00	Mid	8	2.00	1.62	Back	0	0.676	1.091	1.087	0.802
Body-worn	NB U-NII 5	Left	H5RH71002DM0000830	92.00	0.02	6342.00	Mid-High	8	2.00	1.75	Back	0	0.802	1.059	1.087	0.923
Body-worn	NB U-NII 5	Left	H5RH71002DM0000830	92.00	-0.21	6342.00	Mid-High	8	2.00	1.75	Button	0	0.344	1.059	1.087	0.396
Body-worn	NB U-NII 5	Left	H5RH71002DM0000830	92.00	-0.21	6342.00	Mid-High	8	2.00	1.75	Antenna Touching	0	0.600	1.059	1.087	0.691

Note: The reported SAR was scaled to 100% transmission duty factor.

9.9 SAR Test Notes

General Notes:

- Batteries are fully charged at the beginning of the SAR measurements.
- Liquid tissue depth was at least 15.0 cm for all frequencies.
- The manufacturer has confirmed that the device(s) tested have the same physical, mechanical, and thermal characteristics and are within operational tolerances expected for production units.
- SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D04v01.
- To demonstrate compliance for Head, SAR testing was performed on a flat phantom filled with head tissue equivalent medium.
- Per manufacturer request, Body-Worn SAR was additionally evaluated as a conservative SAR test condition for the left earbud (BCG-A3053).
- Per FCC KDB Publication 865664 D01v01r04, variability SAR tests were not required since measured SAR results for all frequency bands were less than 0.8 W/kg and 2.0 W/kg for 10g SAR.
- The orange highlights throughout the report represents the highest scaled SAR per Equipment Class.

Bluetooth/NB UNII Notes

- Bluetooth/NB UNII SAR was evaluated with a test mode with hopping disabled with DH5 operation. The reported SAR was scaled to the 100% transmission duty factor to determine compliance for a more conservative exposure analysis. See section 7.2 for the time domain plot and calculation for the duty factor of the device.

FCC ID: BCG-A3053	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2405230024-01.BCG-R1	DUT Type: Wireless Earbud	Page 23 of 32

REV 23.0
07/10/2024

9.10 Power Density Data

MEASUREMENT RESULTS																					
Frequency (MHz)	Channel	Mode	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Power Drift (dB)	Spacing (mm)	Earbud	DUT Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Grid Step (A)	iPD (W/m ²)	Scaling Factor for Measurement Uncertainty per IEC 62479	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Normal psPD (W/m ²)	Scaled Normal psPD (W/m ²)	Total psPD (W/m ²)	Scaled Total psPD (W/m ²)	Plot #
6342	Mid-High	NB U-NII 5	2.00	1.75	-0.01	2	Left	H6RH71002CE0000B30	8	Front	92	0.25	0.830	1.554	1.059	1.087	0.123	0.220	0.135	0.241	
6342	Mid-High	NB U-NII 5	2.00	1.75	0.05	2	Left	H6RH71002CE0000B30	8	Back	92	0.25	2.700	1.554	1.059	1.087	0.546	0.977	0.653	1.168	A7
6342	Mid-High	NB U-NII 5	2.00	1.75	-0.04	2	Left	H6RH71002CE0000B30	8	Antenna Touching	92	0.25	1.900	1.554	1.059	1.087	0.278	0.497	0.296	0.530	
6342	Mid-High	NB U-NII 5	2.00	1.75	-0.03	2	Left	H6RH71002CE0000B30	8	Button	92	0.25	1.430	1.554	1.059	1.087	0.258	0.462	0.274	0.490	
6108	Low	NB U-NII 5	2.00	1.16	-0.03	2	Left	H6RH71002CE0000B30	8	Back	92	0.25	1.460	1.554	1.213	1.087	0.376	0.770	0.408	0.836	
6186	Low-Mid	NB U-NII 5	2.00	1.44	-0.08	2	Left	H6RH71002CE0000B30	8	Back	92	0.25	1.900	1.554	1.138	1.087	0.432	0.830	0.504	0.969	
6264	Mid	NB U-NII 5	2.00	1.62	-0.06	2	Left	H6RH71002CE0000B30	8	Back	92	0.25	1.270	1.554	1.091	1.087	0.296	0.546	0.348	0.641	
6420	High	NB U-NII 5	2.00	1.69	0.06	2	Left	H6RH71002CE0000B30	8	Back	92	0.25	3.790	1.554	1.074	1.087	0.443	0.804	0.490	0.889	
6342	Mid-High	NB U-NII 5	2.00	1.75	-0.02	9.45	Left	H6RH71002CE0000B30	8	Back	92	0.25	1.430	1.554	1.059	1.087	0.293	0.524	0.302	0.540	
47 CFR §1.1310 - SAFETY LIMIT Spatial Average Uncontrolled Exposure / General Population									Power Density 10 W/m ² averaged over 4 cm ²												

9.11 Power Density Notes

1. The manufacturer has confirmed that the devices tested have the same physical, mechanical, and thermal characteristics and are within operational tolerances expected for production units.
2. Batteries are fully charged at the beginning of the measurements. The DUT was connected to a wall charger for some measurements due to the test duration. It was confirmed that the charger plugged into this DUT did not impact the near-field PD test results.
3. Power density was calculated by repeated E-field measurements on two measurement planes separated by $\lambda/4$.
4. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools.
5. Per FCC guidance and equipment manufacturer guidance, power density results were scaled according to IEC 62479:2010 for the portion of the measurement uncertainty > 30%. Total expanded uncertainty of 2.68 dB (85.4%) was used to determine the psPD measurement scaling factor.
6. Per equipment manufacturer guidance, power density was measured at $d=2\text{mm}$ and $d=\lambda/5\text{mm}$ using the same grid size and grid step size for some frequencies and surfaces. The integrated Power Density (iPD) was calculated based on these measurements. Since iPD ratio between the two distances is $\geq -1\text{dB}$, the grid step was sufficient for determining compliance at $d=2\text{mm}$.
7. Per FCC KDB Publication 865664 D01v01r04, variability SAR tests were not required since measured SAR results for all frequency bands were less than 0.8 W/kg and 2.0 W/kg for 10g SAR.
8. PTP-PR algorithm was used during psPD measurement and calculations

FCC ID: BCG-A3053	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2405230024-01.BCG-R1	DUT Type: Wireless Earbud	Page 24 of 32

REV 23.0
07/10/2024

10 SAR MEASUREMENT VARIABILITY

10.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01, SAR measurement variability was not assessed for each frequency band since all measured SAR values are < 0.8 W/kg for 1g SAR and < 2.0 W/kg for 10g SAR.

10.2 Measurement Uncertainty

The measured SAR was < 1.5 W/kg for 1g and < 3.75 W/kg for 10g for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

FCC ID: BCG-A3053	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2405230024-01.BCG-R1	DUT Type: Wireless Earbud	Page 25 of 32

REV 23.0
07/10/2024

11

EQUIPMENT LIST

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	E4404B	Spectrum Analyzer	N/A	N/A	N/A	MY45113242
Agilent	E4438C	ESG Vector Signal Generator	11/14/2023	Annual	11/14/2024	MY45093852
Agilent	E4438C	ESG Vector Signal Generator	11/15/2023	Annual	11/15/2024	MY45092078
Agilent	N5182A	MXG Vector Signal Generator	10/12/2023	Annual	10/12/2024	MY47400015
Agilent	N5182A	MXG Vector Signal Generator	3/7/2024	Annual	3/7/2025	MY47420603
Agilent	8753ES	S-Parameter Vector Network Analyzer	1/10/2024	Annual	1/10/2025	MY40001472
Agilent	N4010A	Wireless Connectivity Test Set	N/A	N/A	N/A	GB46170464
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	433973
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	433974
Amplifier Research	150A100C	Amplifier	CBT	N/A	CBT	350132
Anritsu	MN8110B	I/O Adaptor	CBT	N/A	CBT	6261747881
Anritsu	ML2496A	Power Meter	6/24/2024	Annual	6/24/2025	1840005
Anritsu	ML2495A	Power Meter	7/8/2024	Annual	7/8/2025	1039008
Anritsu	MA2411B	Pulse Power Sensor	8/22/2023	Annual	8/22/2024	1726262
Anritsu	MA2411B	Pulse Power Sensor	11/8/2023	Annual	11/8/2024	1027293
Anritsu	MA24106A	USB Power Sensor	12/4/2023	Annual	12/4/2024	1520501
Anritsu	MA24106A	USB Power Sensor	4/15/2024	Annual	4/15/2025	1827528
Mini-Circuits	PWR-4GHS	USB Power Sensor	6/12/2024	Annual	6/12/2025	12001070013
Control Company	4052	Long Stem Thermometer	2/27/2024	Biennial	2/27/2026	240174346
Control Company	4052	Long Stem Thermometer	2/27/2024	Biennial	2/27/2026	240171096
Control Company	4052	Long Stem Thermometer	2/27/2024	Biennial	2/27/2026	240171059
Control Company	4040	Therm./ Clock/ Humidity Monitor	4/15/2024	Biennial	4/15/2026	240310280
Control Company	4040	Therm./ Clock/ Humidity Monitor	4/15/2024	Biennial	4/15/2026	240310282
Control Company	566279	Therm./ Clock/ Humidity Monitor	2/16/2024	Biennial	2/16/2026	240140051
Mitutoyo	500-196-30	CD-6"ASX 6inch Digital Caliper	2/16/2022	Triennial	2/16/2025	A20238413
Keysight Technologies	N9020A	MXA Signal Analyzer	4/11/2024	Annual	4/11/2025	MY54500644
Agilent	N9020A	MXA Signal Analyzer	6/14/2024	Annual	6/14/2025	MY56470202
MCL	BW-N6W5+	6dB Attenuator	CBT	N/A	CBT	1139
Mini-Circuits	VLF-6000+	Low Pass Filter DC to 6000 MHz	7/5/2023	Annual	7/5/2024	31634
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5	Power Attenuator	CBT	N/A	CBT	1226
Mini-Circuits	ZUDC10-83-S+	Directional Coupler	CBT	N/A	CBT	2050
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Narda	BW-53W2	Attenuator (3dB)	CBT	N/A	CBT	120
Seekonk	NC-100	Torque Wrench	4/2/2024	Biennial	4/2/2026	1262
SPEAG	DAK-3.5	Dielectric Assessment Kit	11/13/2023	Annual	11/13/2024	1277
SPEAG	DAKS-3.5	Portable Dielectric Assessment Kit	8/14/2023	Annual	8/14/2024	1041
SPEAG	MAIA	Modulation and Audio Interference Analyzer	N/A	N/A	N/A	1237
SPEAG	MAIA	Modulation and Audio Interference Analyzer	N/A	N/A	N/A	1331
SPEAG	MAIA	Modulation and Audio Interference Analyzer	N/A	N/A	N/A	1390
SPEAG	5G Verification Source 10GHz	10GHz System Verification Antenna	10/13/2023	Annual	10/13/2024	1006
SPEAG	D2450V2	2450 MHz SAR Dipole	5/11/2022	Triennial	5/11/2025	750
SPEAG	D2450V2	2450 MHz SAR Dipole	11/15/2022	Biennial	11/15/2024	855
SPEAG	D5GH2V2	5 GHz SAR Dipole	3/12/2024	Annual	3/12/2025	1123
SPEAG	D5GH2V2	5 GHz SAR Dipole	6/12/2024	Annual	6/12/2025	1163
SPEAG	D6.5GH2V2	6.5 GHz SAR Dipole	10/11/2023	Annual	10/11/2024	1019
SPEAG	DAE4	Dasy Data Acquisition Electronics	10/18/2023	Annual	10/18/2024	1237
SPEAG	DAE4	Dasy Data Acquisition Electronics	12/7/2023	Annual	12/7/2024	1644
SPEAG	DAE4	Dasy Data Acquisition Electronics	10/18/2023	Annual	10/18/2024	1333
SPEAG	DAE4	Dasy Data Acquisition Electronics	4/9/2024	Annual	4/9/2025	1582
SPEAG	EUmWV4	mmWave Probe	4/8/2024	Annual	4/8/2025	9487
SPEAG	EX3DV4	SAR Probe	10/16/2023	Annual	10/16/2024	3746
SPEAG	EX3DV4	SAR Probe	10/16/2023	Annual	10/16/2024	7420
SPEAG	EX3DV4	SAR Probe	1/16/2024	Annual	1/16/2025	7499

Note: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler, or filter were connected to a calibrated source (i.e., a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

FCC ID: BCG-A3053	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2405230024-01.BCG-R1	DUT Type: Wireless Earbud	Page 26 of 32

12 MEASUREMENT UNCERTAINTIES

Applicable for SAR measurements < 6 GHz:

a	b	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	IEEE 1528 Sec.	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System									
Probe Calibration	E2.1	7	N	1	1	1	7.0	7.0	∞
Axial Isotropy	E2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	E2.2	1.3	N	1	0.7	0.7	0.9	0.9	∞
Boundary Effect	E2.3	2	R	1.732	1	1	1.2	1.2	∞
Linearity	E2.4	0.3	N	1	1	1	0.3	0.3	∞
System Detection Limits	E2.4	0.25	R	1.732	1	1	0.1	0.1	∞
Modulation Response	E2.5	4.8	R	1.732	1	1	2.8	2.8	∞
Readout Electronics	E2.6	0.3	N	1	1	1	0.3	0.3	∞
Response Time	E2.7	0.8	R	1.732	1	1	0.5	0.5	∞
Integration Time	E2.8	2.6	R	1.732	1	1	1.5	1.5	∞
RF Ambient Conditions - Noise	E6.1	3	R	1.732	1	1	1.7	1.7	∞
RF Ambient Conditions - Reflections	E6.1	3	R	1.732	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E6.2	0.8	R	1.732	1	1	0.5	0.5	∞
Probe Positioning w/ respect to Phantom	E6.3	6.7	R	1.732	1	1	3.9	3.9	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E5	4	R	1.732	1	1	2.3	2.3	∞
Test Sample Related									
Test Sample Positioning	E4.2	3.12	N	1	1	1	3.1	3.1	35
Device Holder Uncertainty	E4.1	1.67	N	1	1	1	1.7	1.7	5
Output Power Variation - SAR drift measurement	E2.9	5	R	1.732	1	1	2.9	2.9	∞
SAR Scaling	E6.5	0	R	1.732	1	1	0.0	0.0	∞
Phantom & Tissue Parameters									
Phantom Uncertainty (Shape & Thickness tolerances)	E3.1	7.6	R	1.73	1.0	1.0	4.4	4.4	∞
Liquid Conductivity - measurement uncertainty	E3.3	4.3	N	1	0.78	0.71	3.3	3.0	76
Liquid Permittivity - measurement uncertainty	E3.3	4.2	N	1	0.23	0.26	1.0	1.1	75
Liquid Conductivity - Temperature Uncertainty	E3.4	3.4	R	1.732	0.78	0.71	1.5	1.4	∞
Liquid Permittivity - Temperature Uncertainty	E3.4	0.6	R	1.732	0.23	0.26	0.1	0.1	∞
Liquid Conductivity - deviation from target values	E3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Permittivity - deviation from target values	E3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Combined Standard Uncertainty (k=1)	RSS						12.2	12.0	191
Expanded Uncertainty (95% CONFIDENCE LEVEL)	k=2						24.4	24.0	

The above measurement uncertainties are according to IEEE Std. 1528-2013

FCC ID: BCG-A3053	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2405230024-01.BCG-R1	DUT Type: Wireless Earbud	Page 27 of 32

REV 23.0
07/10/2024

Applicable for SAR measurements > 6 GHz:

a	b	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	IEEE 1528 Sec.	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System									
Probe Calibration	E2.1	9.3	N	1	1	1	9.3	9.3	∞
Axial Isotropy	E2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	E2.2	1.3	N	1	0.7	0.7	0.9	0.9	∞
Boundary Effect	E2.3	2	R	1.732	1	1	1.2	1.2	∞
Linearity	E2.4	0.3	N	1	1	1	0.3	0.3	∞
System Detection Limits	E2.4	0.25	R	1.732	1	1	0.1	0.1	∞
Modulation Response	E2.5	4.8	R	1.732	1	1	2.8	2.8	∞
Readout Electronics	E2.6	0.3	N	1	1	1	0.3	0.3	∞
Response Time	E2.7	0.8	R	1.732	1	1	0.5	0.5	∞
Integration Time	E2.8	2.6	R	1.732	1	1	1.5	1.5	∞
RF Ambient Conditions - Noise	E6.1	3	R	1.732	1	1	1.7	1.7	∞
RF Ambient Conditions - Reflections	E6.1	3	R	1.732	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E6.2	0.8	R	1.732	1	1	0.5	0.5	∞
Probe Positioning w/ respect to Phantom	E6.3	6.7	R	1.732	1	1	3.9	3.9	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E5	4	R	1.732	1	1	2.3	2.3	∞
Test Sample Related									
Test Sample Positioning	E4.2	3.12	N	1	1	1	3.1	3.1	35
Device Holder Uncertainty	E4.1	1.67	N	1	1	1	1.7	1.7	5
Output Power Variation - SAR drift measurement	E2.9	5	R	1.732	1	1	2.9	2.9	∞
SAR Scaling	E6.5	0	R	1.732	1	1	0.0	0.0	∞
Phantom & Tissue Parameters									
Phantom Uncertainty (Shape & Thickness tolerances)	E3.1	7.6	R	1.73	1.0	1.0	4.4	4.4	∞
Liquid Conductivity - measurement uncertainty	E3.3	4.3	N	1	0.78	0.71	3.3	3.0	76
Liquid Permittivity - measurement uncertainty	E3.3	4.2	N	1	0.23	0.26	1.0	1.1	75
Liquid Conductivity - Temperature Uncertainty	E3.4	3.4	R	1.732	0.78	0.71	1.5	1.4	∞
Liquid Permittivity - Temperature Uncertainty	E3.4	0.6	R	1.732	0.23	0.26	0.1	0.1	∞
Liquid Conductivity - deviation from target values	E3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Permittivity - deviation from target values	E3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Combined Standard Uncertainty (k=1)	RSS						13.8	13.6	191
Expanded Uncertainty (95% CONFIDENCE LEVEL)	k=2						27.6	27.1	

The above measurement uncertainties are according to IEEE Std. 1528-2013

FCC ID: BCG-A3053	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2405230024-01.BCG-R1	DUT Type: Wireless Earbud	Page 28 of 32

REV 23.0
07/10/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Applicable for Power Density measurements:

a	b	c	d	e	f = c x f/e	g
Uncertainty Component	Unc. (± dB)	Prob. Dist.	Div.	c _i	u _i (± dB)	v _i
Measurement System						
Calibration	0.49	N	1	1	0.49	∞
Probe Correction	0.00	R	1.73	1	0.00	∞
Frequency Response	0.20	R	1.73	1	0.12	∞
Sensor Cross Coupling	0.00	R	1.73	1	0.00	∞
Isotropy	0.50	R	1.73	1	0.29	∞
Linearity	0.20	R	1.73	1	0.12	∞
Probe Scattering	0.00	R	1.73	1	0.00	∞
Probe Positioning offset	0.30	R	1.73	1	0.17	∞
Probe Positioning Repeatability	0.04	R	1.73	1	0.02	∞
Sensor Mechanical Offset	0.00	R	1.73	1	0.00	∞
Probe Spatial Resolution	0.00	R	1.73	1	0.00	∞
Field Impedance Dependence	0.00	R	1.73	1	0.00	∞
Amplitude and Phase Drift	0.00	R	1.73	1	0.00	∞
Amplitude and Phase Noise	0.04	R	1.73	1	0.02	∞
Measurement Area Truncation	0.00	R	1.73	1	0.00	∞
Data Acquisition	0.03	N	1	1	0.03	∞
Sampling	0.00	R	1.73	1	0.00	∞
Field Reconstruction	2.00	R	1.73	1	1.15	∞
Forward Transformation	0.00	R	1.73	1	0.00	∞
Power Density Scaling	0.00	R	1.73	1	0.00	∞
Spatial Averaging	0.10	R	1.73	1	0.06	∞
System Detection Limit	0.04	R	1.73	1	0.02	∞
Test Sample Related						
Probe Coupling with DUT	0.00	R	1.73	1	0.00	∞
Modulation Response	0.40	R	1.73	1	0.23	∞
Integration Time	0.00	R	1.73	1	0.00	∞
Response Time	0.00	R	1.73	1	0.00	∞
Device Holder Influence	0.10	R	1.73	1	0.06	∞
DUT alignment	0.00	R	1.73	1	0.00	∞
RF Ambient Conditions	0.04	R	1.73	1	0.02	∞
Ambient Reflections	0.04	R	1.73	1	0.02	∞
Immunity/Secondary Reception	0.00	R	1.73	1	0.00	∞
Drift of DUT	0.21	R	1.73	1	0.12	∞
Combined Standard Uncertainty (k=1)	RSS				1.34	∞
Expanded Uncertainty (95% CONFIDENCE LEVEL)	k=2				2.68	

FCC ID: BCG-A3053	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2405230024-01.BCG-R1	DUT Type: Wireless Earbud	Page 29 of 32

REV 23.0
07/10/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

13 CONCLUSION

13.1 Measurement Conclusion

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Innovation, Science, and Economic Development Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g., ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g., age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

FCC ID: BCG-A3053	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2405230024-01.BCG-R1	DUT Type: Wireless Earbud	Page 30 of 32

REV 23.0
07/10/2024

14 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2013, IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 1 -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

FCC ID: BCG-A3053	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2405230024-01.BCG-R1	DUT Type: Wireless Earbud	Page 31 of 32

REV 23.0
07/10/2024

- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 1: Devices used next to the ear (Frequency range of 300 MHz to 6 GHz), July 2016.
- [21] Innovation, Science, Economic Development Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2015
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement Guidance for IEEE 802.11 Transmitters, KDB Publication 248227 D01
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D03-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.

FCC ID: BCG-A3053	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2405230024-01.BCG-R1	DUT Type: Wireless Earbud	Page 32 of 32

REV 23.0
07/10/2024