

Test Laboratory: Compliance Certification Services

## 1\_Lapheld\_GPRS

DUT: Apple; Type: NA; Serial: NA

Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 1.01$  mho/m;  $\epsilon_r = 56.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.7, 8.7, 8.7); Calibrated: 3/23/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 9/15/2009
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**GPRS 850\_1 slot\_M ch/Area Scan (15x7x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.452 mW/g


**GPRS 850\_1 slot\_M ch/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm

Peak SAR (extrapolated) = 0.761 W/kg

**SAR(1 g) = 0.420 mW/g; SAR(10 g) = 0.240 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.512 mW/g

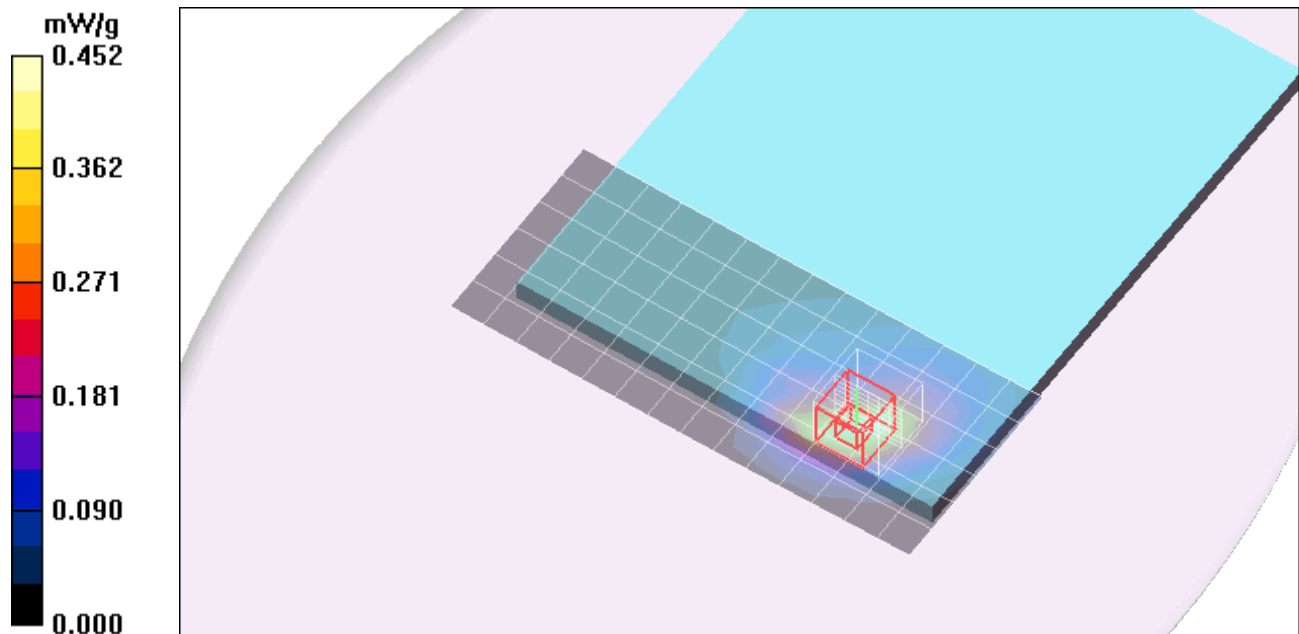

Test Laboratory: Compliance Certification Services

## 1\_Lapheld\_GPRS

DUT: Apple; Type: NA; Serial: NA

Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 1.01$  mho/m;  $\epsilon_r = 56.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area SAR setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.7, 8.7, 8.7); Calibrated: 3/23/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 9/15/2009
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**GPRS 850\_2 slot\_M ch/Area Scan (15x7x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.442 mW/g


**GPRS 850\_2 slot\_M ch/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm

Peak SAR (extrapolated) = 0.737 W/kg

**SAR(1 g) = 0.411 mW/g; SAR(10 g) = 0.235 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.502 mW/g

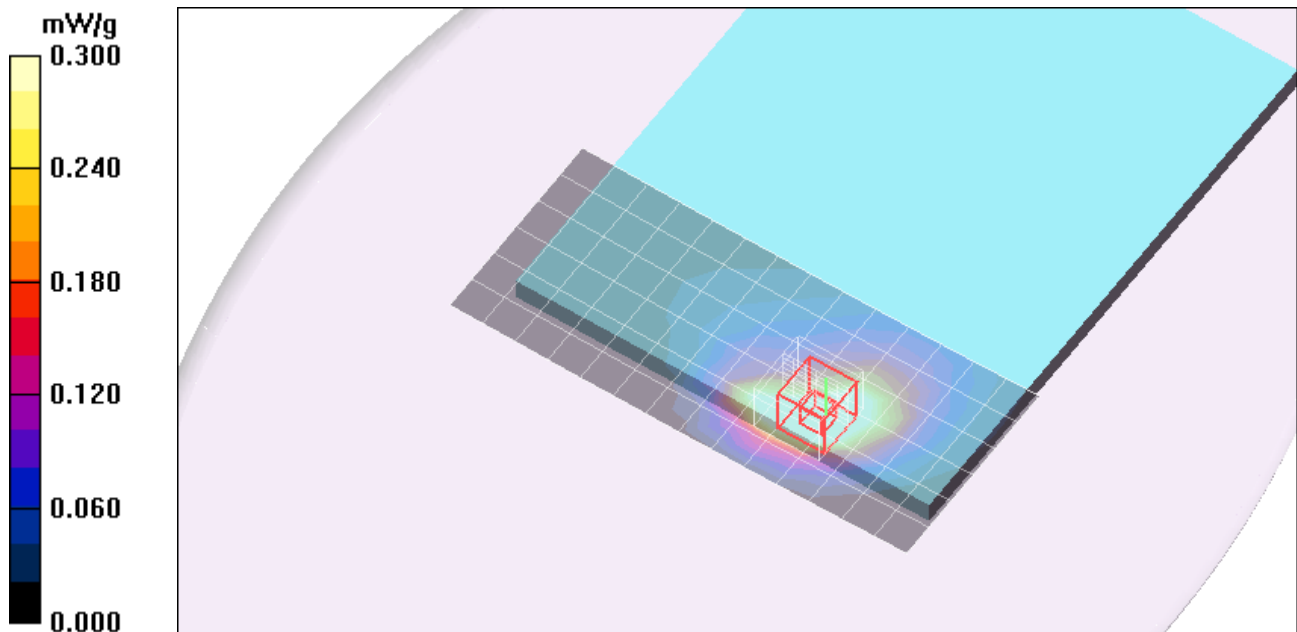

Test Laboratory: Compliance Certification Services

## 1\_Lapheld\_GSM1900

DUT: Apple; Type: NA; Serial: NA

Communication System: DCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8  
 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 53.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.85, 6.85, 6.85); Calibrated: 3/23/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 9/15/2009
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**GPRS 1 slot\_M ch/Area Scan (10x5x1):** Measurement grid: dx=15mm, dy=15mm


Maximum value of SAR (measured) = 0.305 mW/g

**GPRS 1 slot\_M ch/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm

Peak SAR (extrapolated) = 0.437 W/kg

**SAR(1 g) = 0.255 mW/g; SAR(10 g) = 0.135 mW/g**

Maximum value of SAR (measured) = 0.319 mW/g

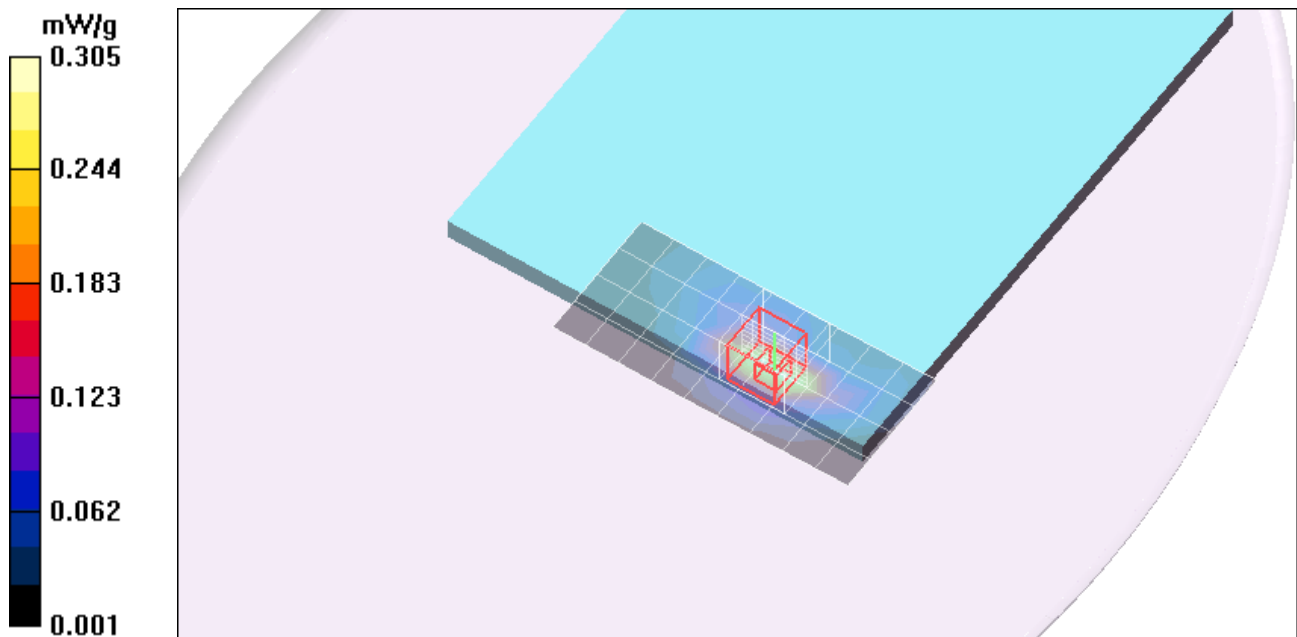

Test Laboratory: Compliance Certification Services

## 1\_Lapheld\_GSM1900

DUT: Apple; Type: NA; Serial: NA

Communication System: DCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4  
 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.51$  mho/m;  $\epsilon_r = 54.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.85, 6.85, 6.85); Calibrated: 3/23/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 9/15/2009
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**GPRS 2 slot\_M ch/Area Scan (15x5x1):** Measurement grid: dx=15mm, dy=15mm


Maximum value of SAR (measured) = 0.304 mW/g

**GPRS 2 slot\_M ch/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm

Peak SAR (extrapolated) = 0.642 W/kg

**SAR(1 g) = 0.255 mW/g; SAR(10 g) = 0.137 mW/g**

Maximum value of SAR (measured) = 0.315 mW/g

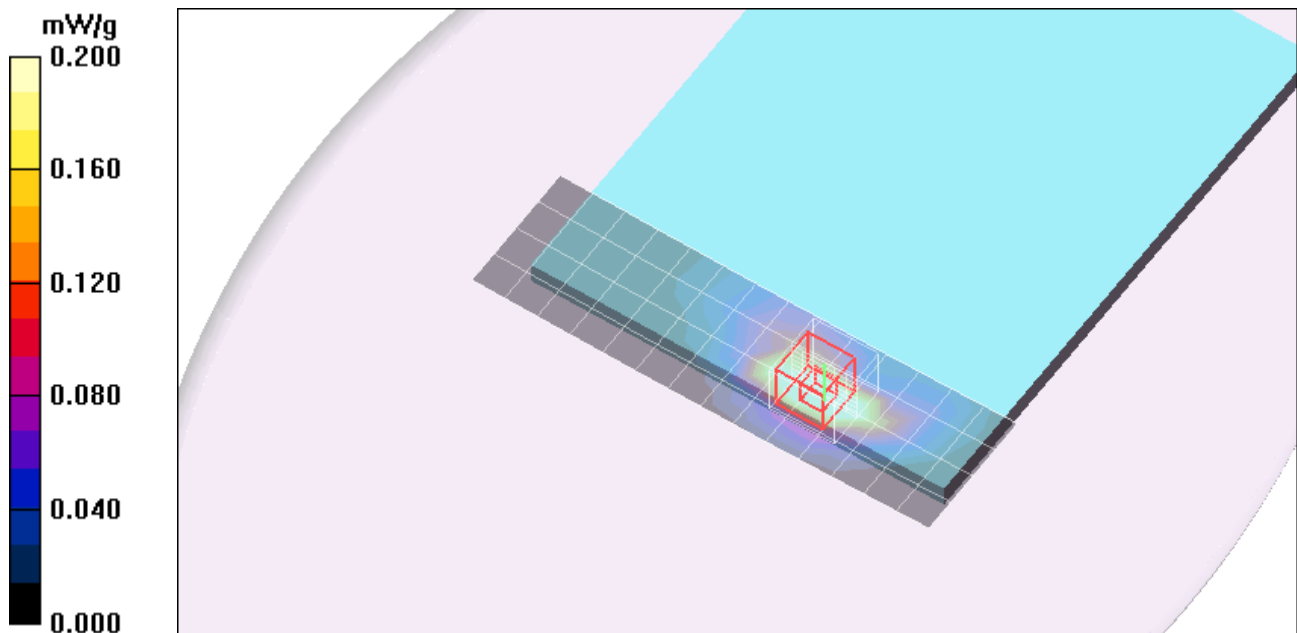

Test Laboratory: Compliance Certification Services

## 1\_Lapheld\_GSM1900

DUT: Apple; Type: NA; Serial: NA

Communication System: DCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 53.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.85, 6.85, 6.85); Calibrated: 3/23/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 9/15/2009
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**EGPRS 1 slot\_M ch/Area Scan (10x5x1):** Measurement grid: dx=15mm, dy=15mm


Maximum value of SAR (measured) = 0.461 mW/g

**EGPRS 1 slot\_M ch/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm

Peak SAR (extrapolated) = 0.662 W/kg

**SAR(1 g) = 0.387 mW/g; SAR(10 g) = 0.206 mW/g**

Maximum value of SAR (measured) = 0.486 mW/g

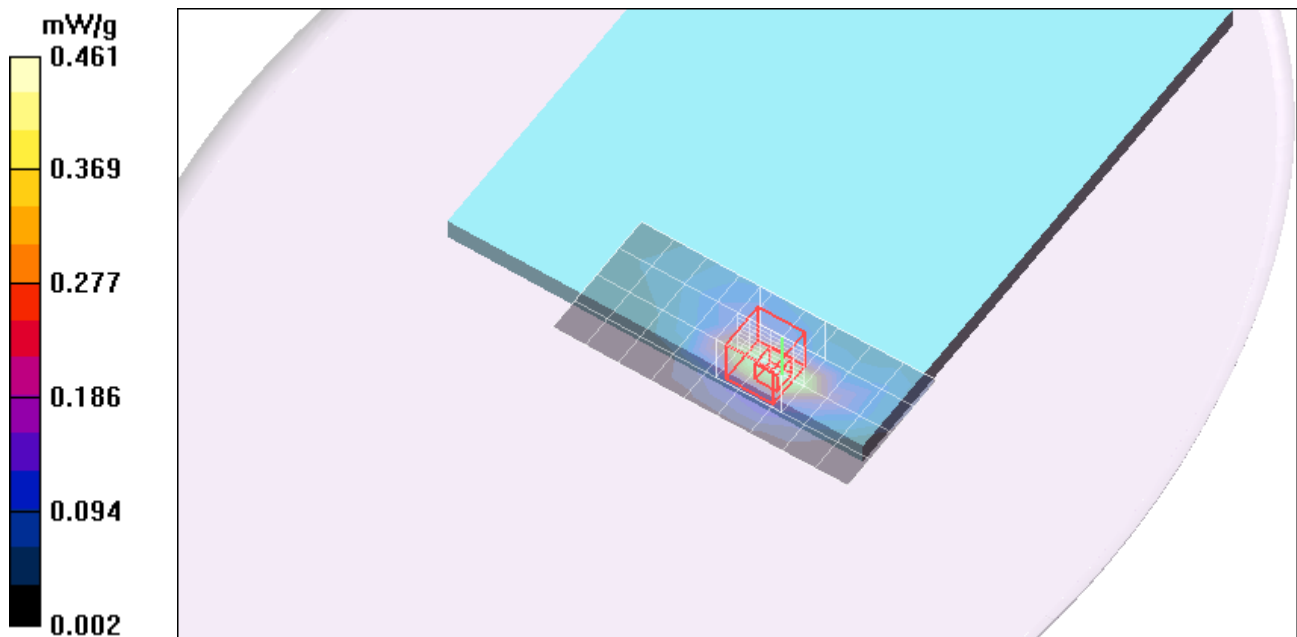

Test Laboratory: Compliance Certification Services

## 1\_Lapheld\_GSM1900

DUT: Apple; Type: NA; Serial: NA

Communication System: DCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4  
 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 53.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.85, 6.85, 6.85); Calibrated: 3/23/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 9/15/2009
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**EGPRS 2 slot\_M ch/Area Scan (10x5x1):** Measurement grid: dx=15mm, dy=15mm


Maximum value of SAR (measured) = 0.516 mW/g

**EGPRS 2 slot\_M ch/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm

Peak SAR (extrapolated) = 0.760 W/kg

**SAR(1 g) = 0.440 mW/g; SAR(10 g) = 0.235 mW/g**

Maximum value of SAR (measured) = 0.554 mW/g

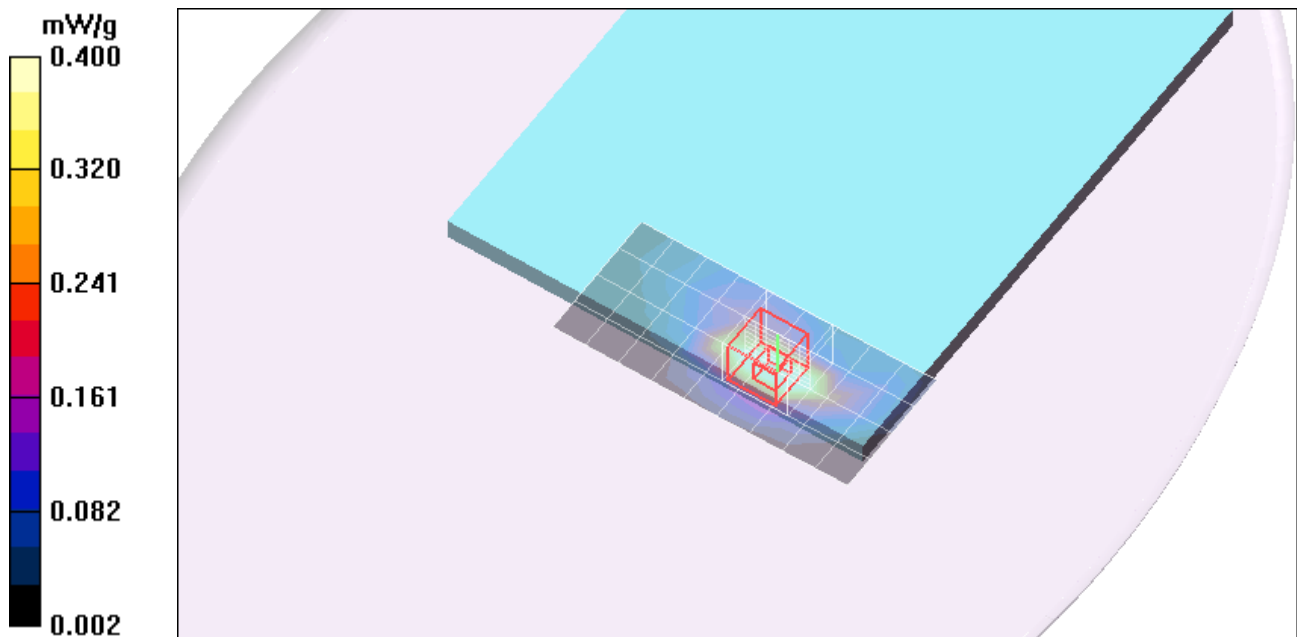

Test Laboratory: Compliance Certification Services

## 2\_Secondary landscape\_GPRS

DUT: Apple; Type: NA; Serial: NA

Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 1.01$  mho/m;  $\epsilon_r = 56.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.7, 8.7, 8.7); Calibrated: 3/23/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 9/15/2009
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**GPRS 850\_2 slot\_M ch/Area Scan (5x10x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.312 mW/g


**GPRS 850\_2 slot\_M ch/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm

Peak SAR (extrapolated) = 0.657 W/kg

**SAR(1 g) = 0.315 mW/g; SAR(10 g) = 0.179 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.386 mW/g

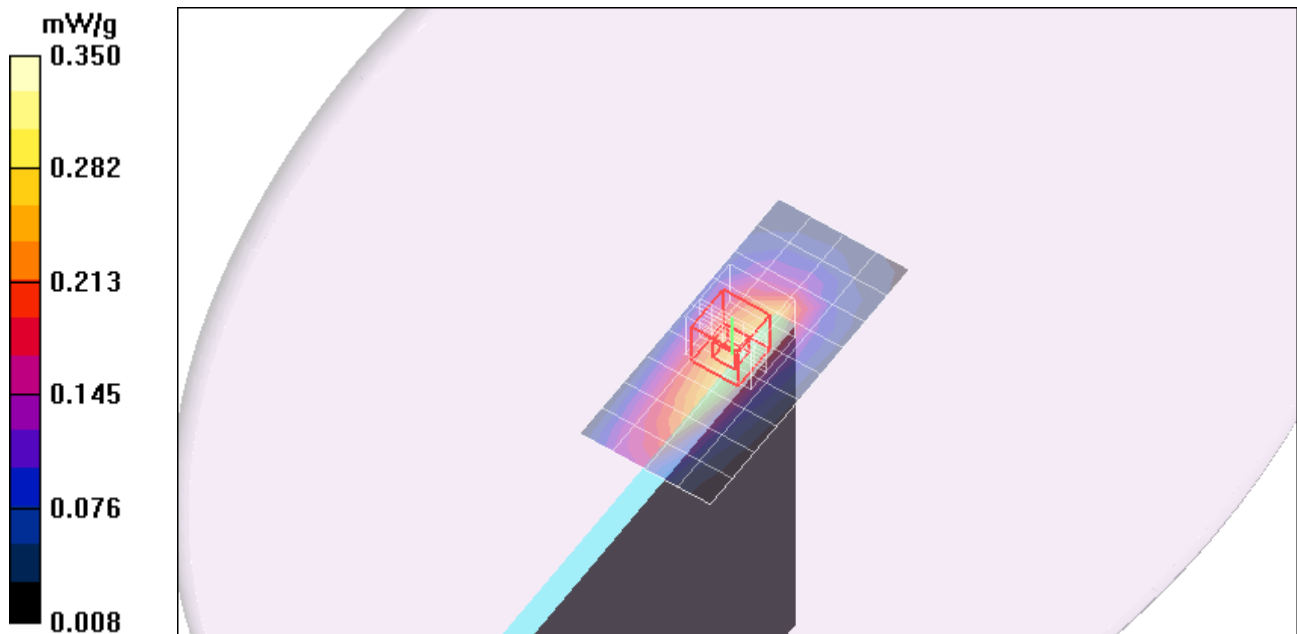

Test Laboratory: Compliance Certification Services

## 2\_Secondary landscape\_GSM1900

DUT: Apple; Type: NA; Serial: NA

Communication System: DCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4  
 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.51$  mho/m;  $\epsilon_r = 54.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.85, 6.85, 6.85); Calibrated: 3/23/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 9/15/2009
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**GPRS 2 slot\_M ch/Area Scan (5x10x1):** Measurement grid: dx=15mm, dy=15mm


Maximum value of SAR (measured) = 0.263 mW/g

**GPRS 2 slot\_M ch/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm

Peak SAR (extrapolated) = 0.498 W/kg

**SAR(1 g) = 0.225 mW/g; SAR(10 g) = 0.111 mW/g**

Maximum value of SAR (measured) = 0.289 mW/g

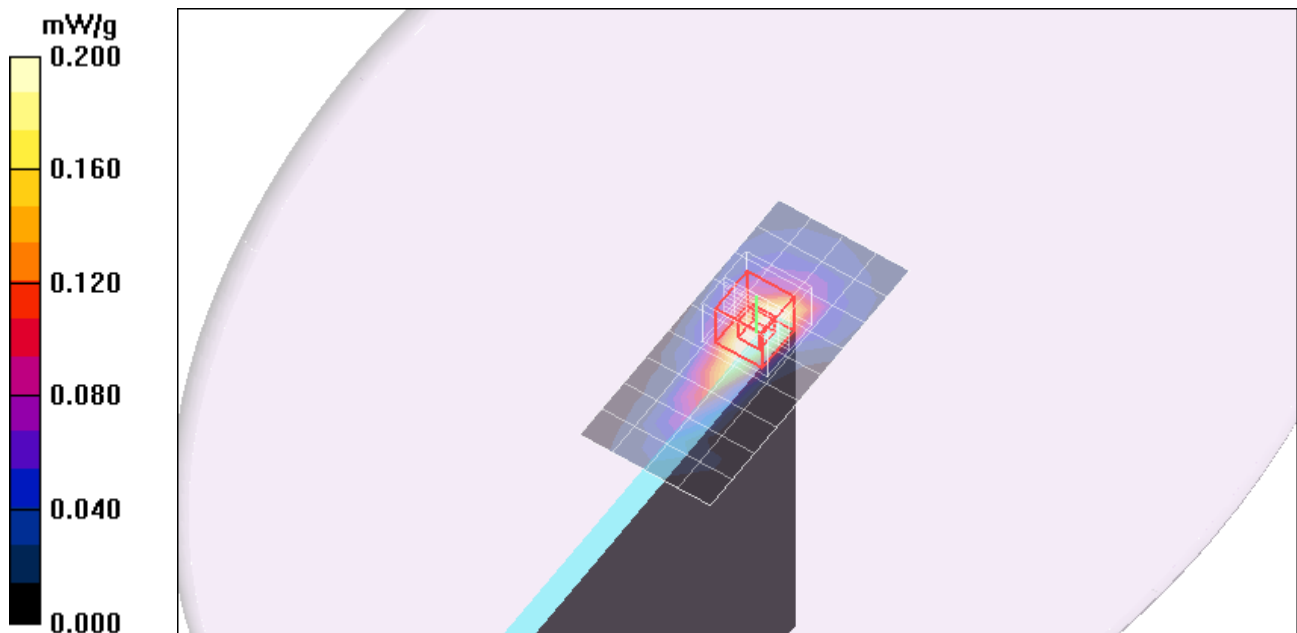



Test Laboratory: Compliance Certification Services

### 3\_Secondary portrait\_GPRS

DUT: Apple; Type: NA; Serial: NA

Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 1.01$  mho/m;  $\epsilon_r = 56.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.7, 8.7, 8.7); Calibrated: 3/23/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 9/15/2009
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**GPRS 850\_1 slot\_M ch/Area Scan (5x14x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.831 mW/g


**GPRS 850\_1 slot\_M ch/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm

Peak SAR (extrapolated) = 1.18 W/kg

**SAR(1 g) = 0.655 mW/g; SAR(10 g) = 0.397 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.798 mW/g

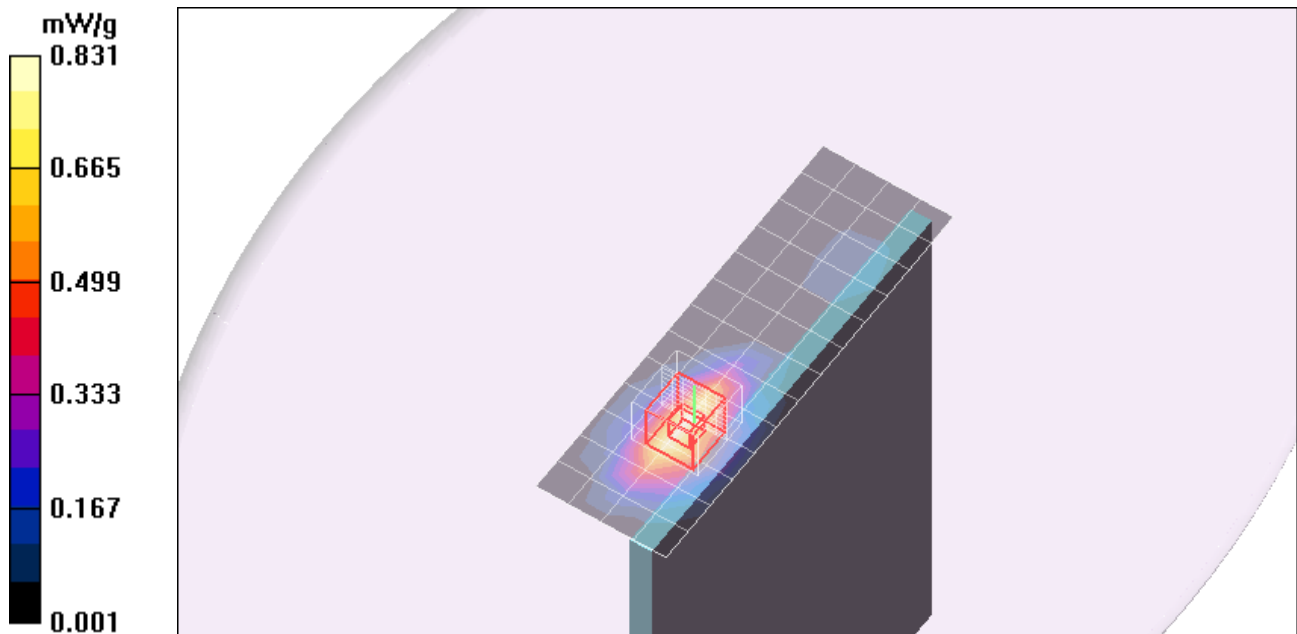

Test Laboratory: Compliance Certification Services

### 3\_Secondary portrait\_GPRS

DUT: Apple; Type: NA; Serial: NA

Communication System: GSM850; Frequency: 836.6 MHz;Duty Cycle: 1:4  
Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 1.01$  mho/m;  $\epsilon_r = 56.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

- DASY4 Configuration:
- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
  - Probe: EX3DV4 - SN3686; ConvF(8.7, 8.7, 8.7); Calibrated: 3/23/2009
  - Sensor-Surface: 3mm (Mechanical Surface Detection)
  - Electronics: DAE3 Sn500; Calibrated: 9/15/2009
  - Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
  - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

#### GPRS 850\_2 slot\_M ch/Area Scan (5x14x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.794 mW/g


#### GPRS 850\_2 slot\_M ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Peak SAR (extrapolated) = 1.33 W/kg

**SAR(1 g) = 0.695 mW/g; SAR(10 g) = 0.417 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.864 mW/g

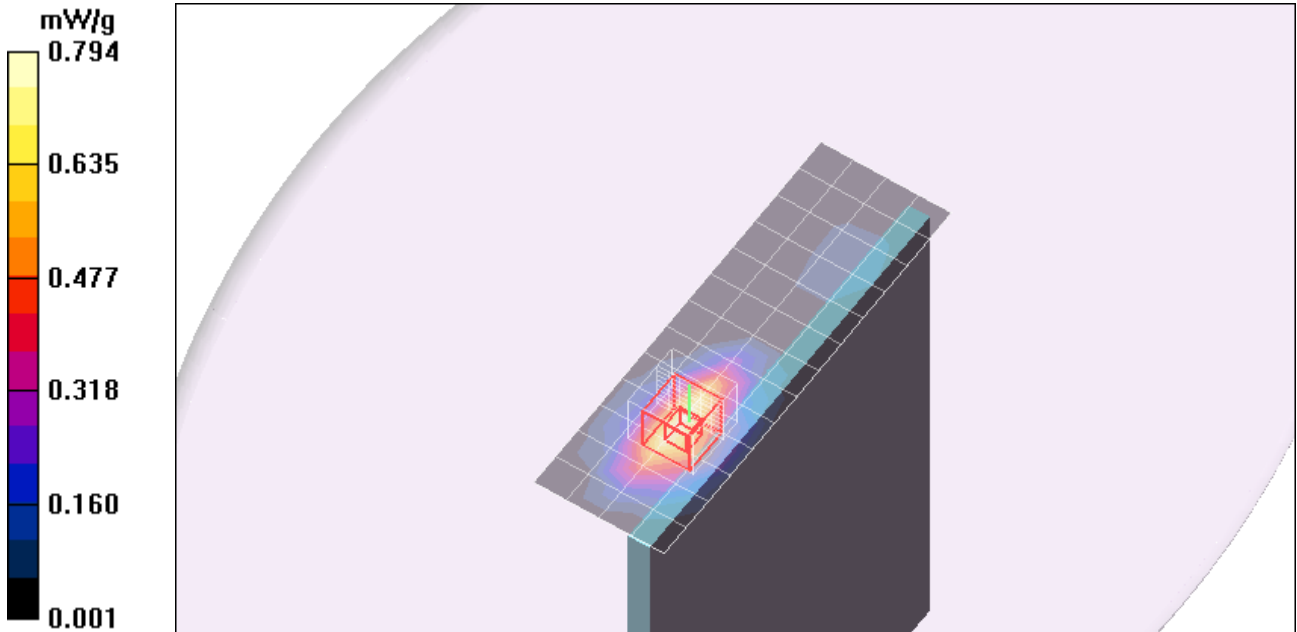

Test Laboratory: Compliance Certification Services

### 3\_Secondary portrait\_GSM1900

DUT: Apple; Type: NA; Serial: NA

Communication System: DCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8  
 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.51$  mho/m;  $\epsilon_r = 54.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.85, 6.85, 6.85); Calibrated: 3/23/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 9/15/2009
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**GPRS 1 slot M ch/Area Scan (5x11x1):** Measurement grid: dx=15mm, dy=15mm


Maximum value of SAR (measured) = 0.538 mW/g

**GPRS 1 slot M ch/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm

Peak SAR (extrapolated) = 0.851 W/kg

**SAR(1 g) = 0.432 mW/g; SAR(10 g) = 0.205 mW/g**

Maximum value of SAR (measured) = 0.583 mW/g

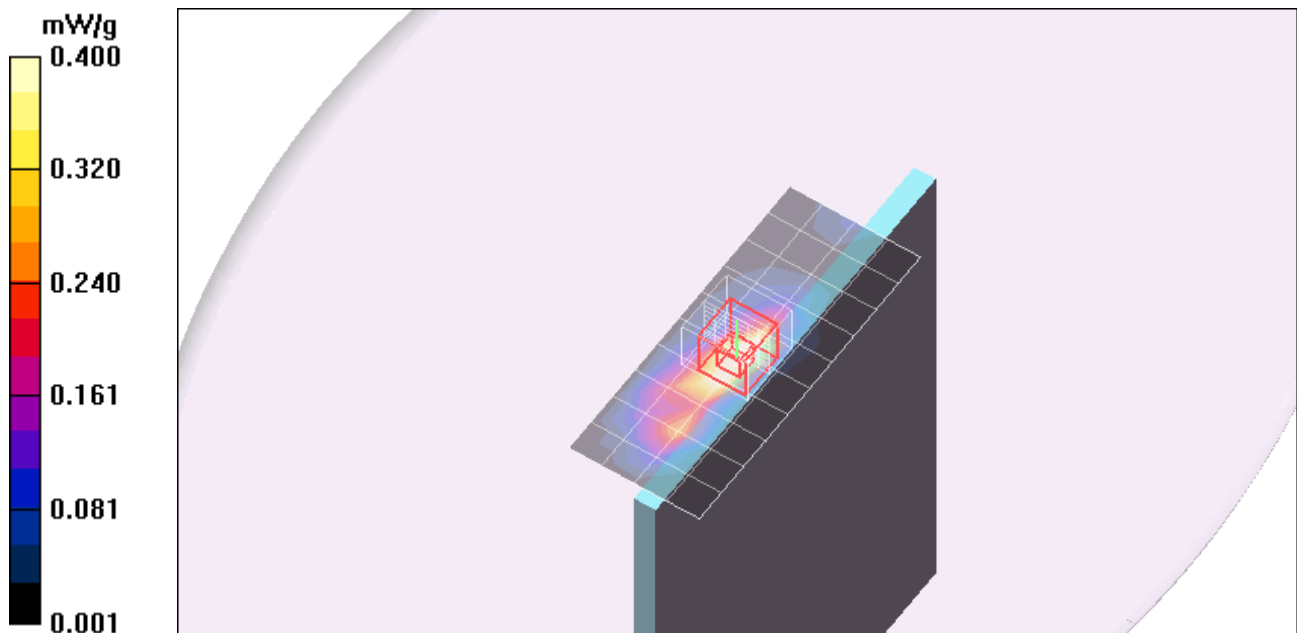

Test Laboratory: Compliance Certification Services

### 3\_Secondary portrait\_GSM1900

DUT: Apple; Type: NA; Serial: NA

Communication System: DCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4  
 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.51$  mho/m;  $\epsilon_r = 54.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.85, 6.85, 6.85); Calibrated: 3/23/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 9/15/2009
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**GPRS 2 slot M ch/Area Scan (5x11x1):** Measurement grid: dx=15mm, dy=15mm


Maximum value of SAR (measured) = 0.549 mW/g

**GPRS 2 slot M ch/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm

Peak SAR (extrapolated) = 0.883 W/kg

**SAR(1 g) = 0.447 mW/g; SAR(10 g) = 0.212 mW/g**

Maximum value of SAR (measured) = 0.595 mW/g

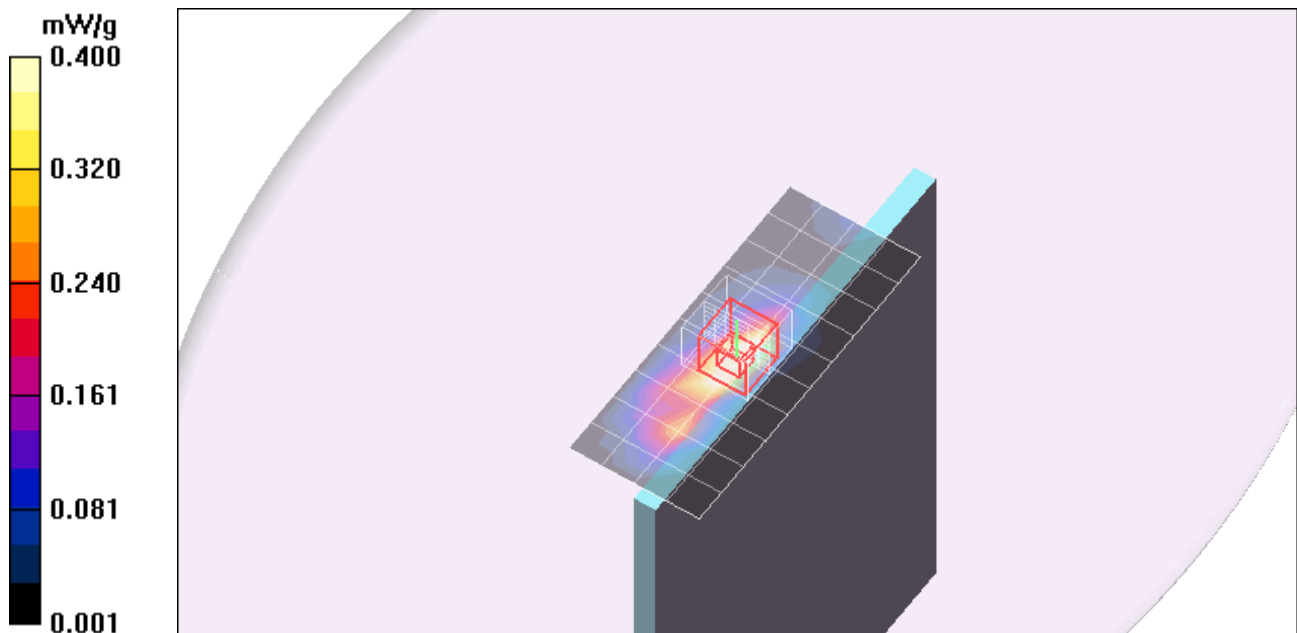

Test Laboratory: Compliance Certification Services

### 3\_Secondary portrait\_GSM1900

DUT: Apple; Type: NA; Serial: NA

Communication System: DCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8  
 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 53.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.85, 6.85, 6.85); Calibrated: 3/23/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 9/15/2009
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**EGPRS 1 slot M ch/Area Scan (5x11x1):** Measurement grid: dx=15mm, dy=15mm


Maximum value of SAR (measured) = 0.950 mW/g

**EGPRS 1 slot M ch/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm

Peak SAR (extrapolated) = 1.44 W/kg

**SAR(1 g) = 0.732 mW/g; SAR(10 g) = 0.348 mW/g**

Maximum value of SAR (measured) = 0.988 mW/g

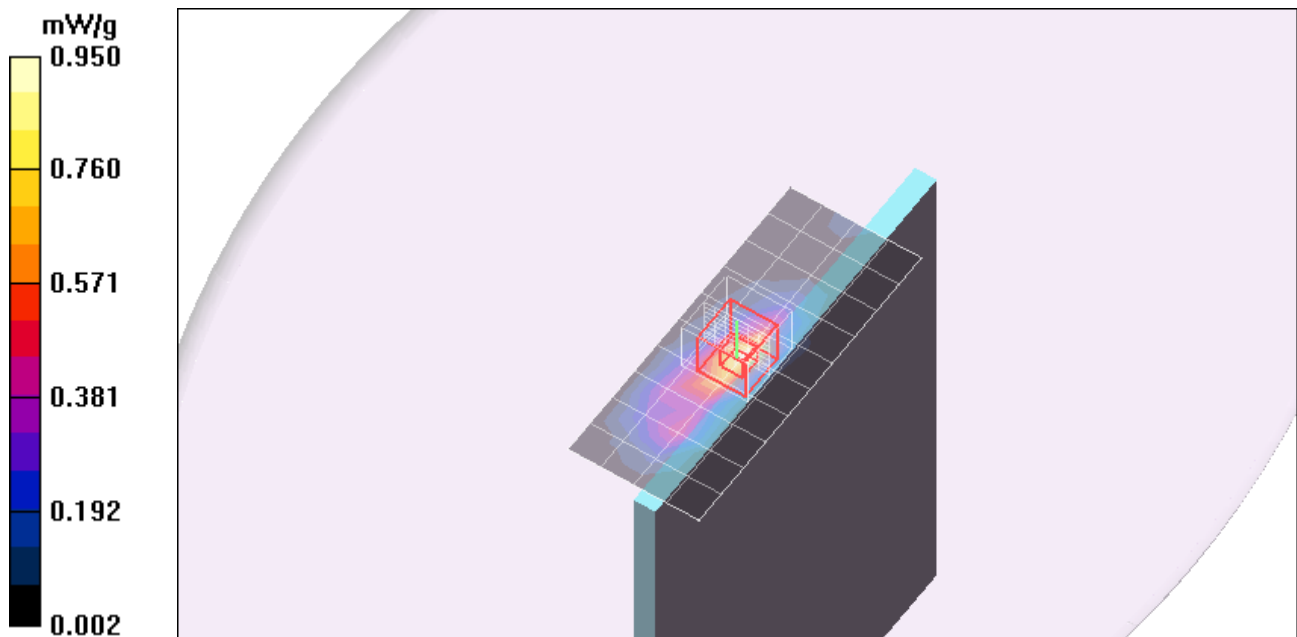

Test Laboratory: Compliance Certification Services

### 3\_Secondary portrait\_GSM1900

DUT: Apple; Type: NA; Serial: NA

Communication System: DCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4  
 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 53.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.85, 6.85, 6.85); Calibrated: 3/23/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 9/15/2009
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**EGPRS 2 slot M ch/Area Scan (5x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.11 mW/g

**EGPRS 2 slot M ch/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm

Peak SAR (extrapolated) = 1.42 W/kg

**SAR(1 g) = 0.763 mW/g; SAR(10 g) = 0.386 mW/g**

Maximum value of SAR (measured) = 0.996 mW/g

