

Test Laboratory: Compliance Certification Services (UL CCS)

GSM1900_Body

DUT: Apple; Type: NA; Serial: NA

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C


DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3749; ConvF(7.33, 7.33, 7.33); Calibrated: 12/13/2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 7/21/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front side_GPRS 2 slot_M-ch/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.639 mW/g

Front side_GPRS 2 slot_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 20.9 V/m; Power Drift = 0.200 dB
Peak SAR (extrapolated) = 0.973 W/kg
SAR(1 g) = 0.552 mW/g; SAR(10 g) = 0.333 mW/g
Maximum value of SAR (measured) = 0.684 mW/g

Front side_GPRS 2 slot_M-ch/Zoom Scan 2 (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 20.9 V/m; Power Drift = 0.200 dB
Peak SAR (extrapolated) = 0.709 W/kg
SAR(1 g) = 0.480 mW/g; SAR(10 g) = 0.314 mW/g
Maximum value of SAR (measured) = 0.556 mW/g

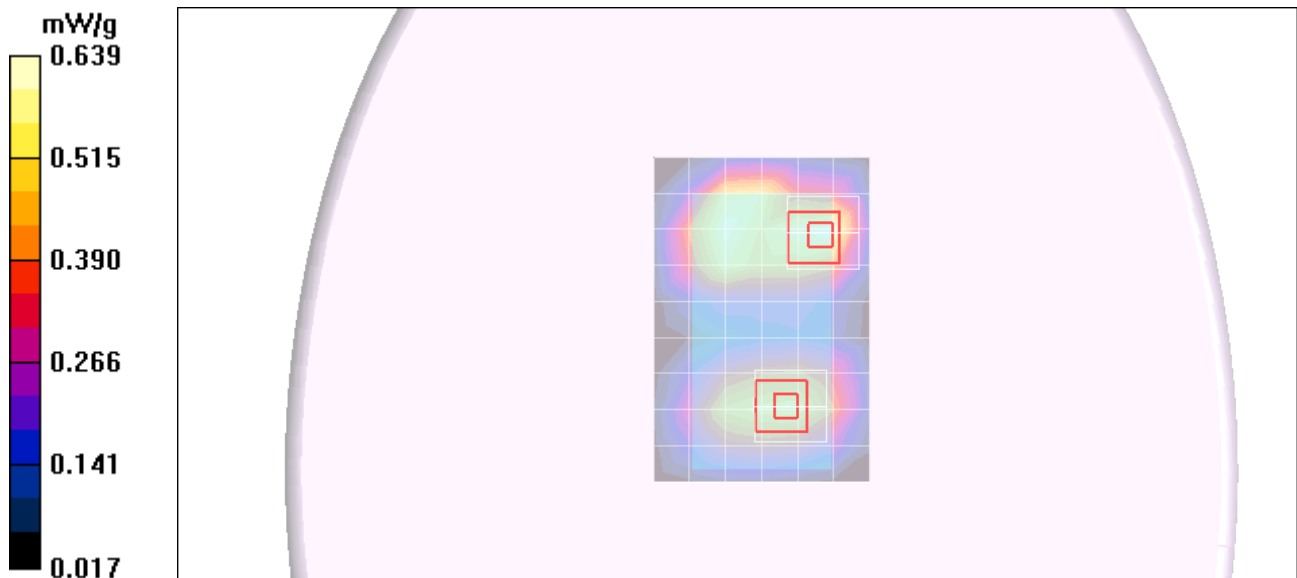


Test Laboratory: Compliance Certification Services (UL CCS)

GSM1900_Body

DUT: Apple; Type: NA; Serial: NA

Communication System: PCS1900; Frequency: 1880 MHz;Duty Cycle: 1:4

Front side_GPRS 2 slot_M-ch/Z Scan (1x1x34): Measurement grid: dx=20mm, dy=20mm, dz=3mm
Maximum value of SAR (measured) = 0.356 mW/g

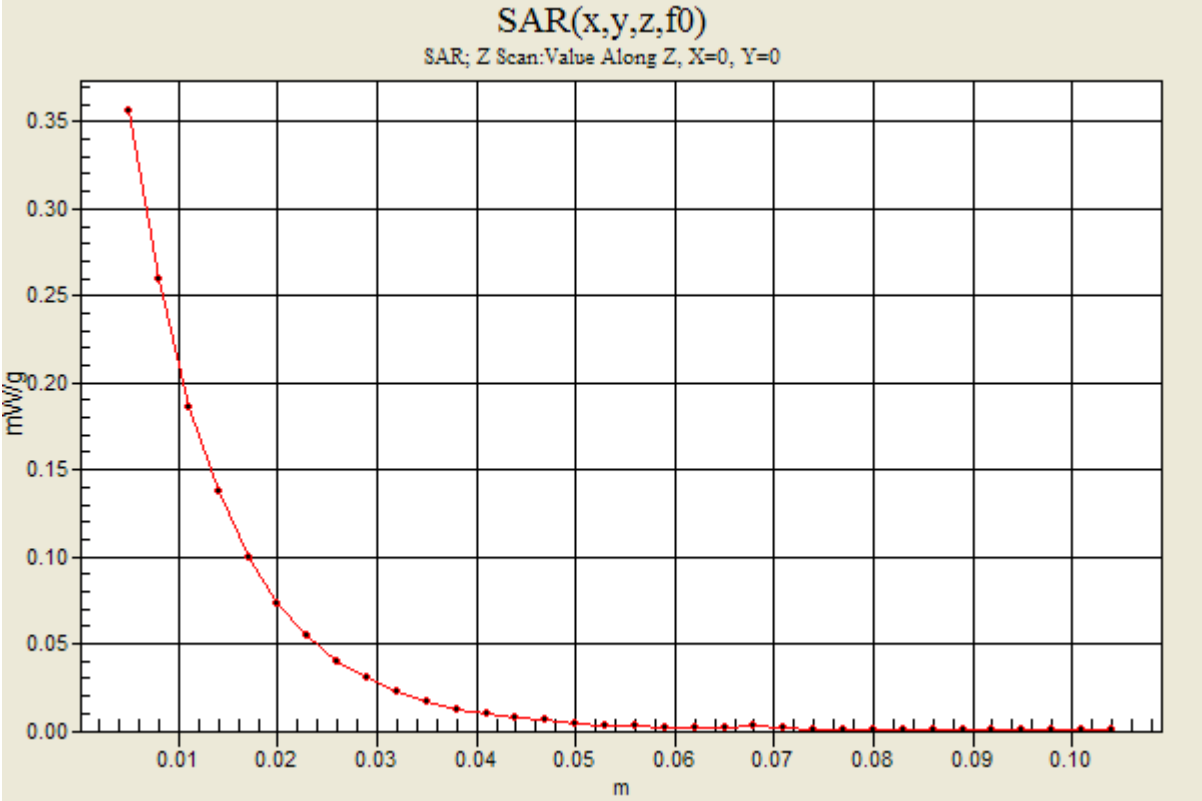

Test Laboratory: Compliance Certification Services (UL CCS)

GSM1900_Body

DUT: Apple; Type: NA; Serial: NA

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3749; ConvF(7.33, 7.33, 7.33); Calibrated: 12/13/2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 7/21/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front side_GPRS 1 slot_M-ch/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.471 mW/g

Front side_GPRS 1 slot_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 18.1 V/m; Power Drift = 0.127 dB

Peak SAR (extrapolated) = 0.705 W/kg

SAR(1 g) = 0.408 mW/g; SAR(10 g) = 0.248 mW/g

Maximum value of SAR (measured) = 0.501 mW/g


Front side_GPRS 1 slot_M-ch/Zoom Scan 2 (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 18.1 V/m; Power Drift = 0.127 dB

Peak SAR (extrapolated) = 0.529 W/kg

SAR(1 g) = 0.355 mW/g; SAR(10 g) = 0.232 mW/g

Maximum value of SAR (measured) = 0.413 mW/g

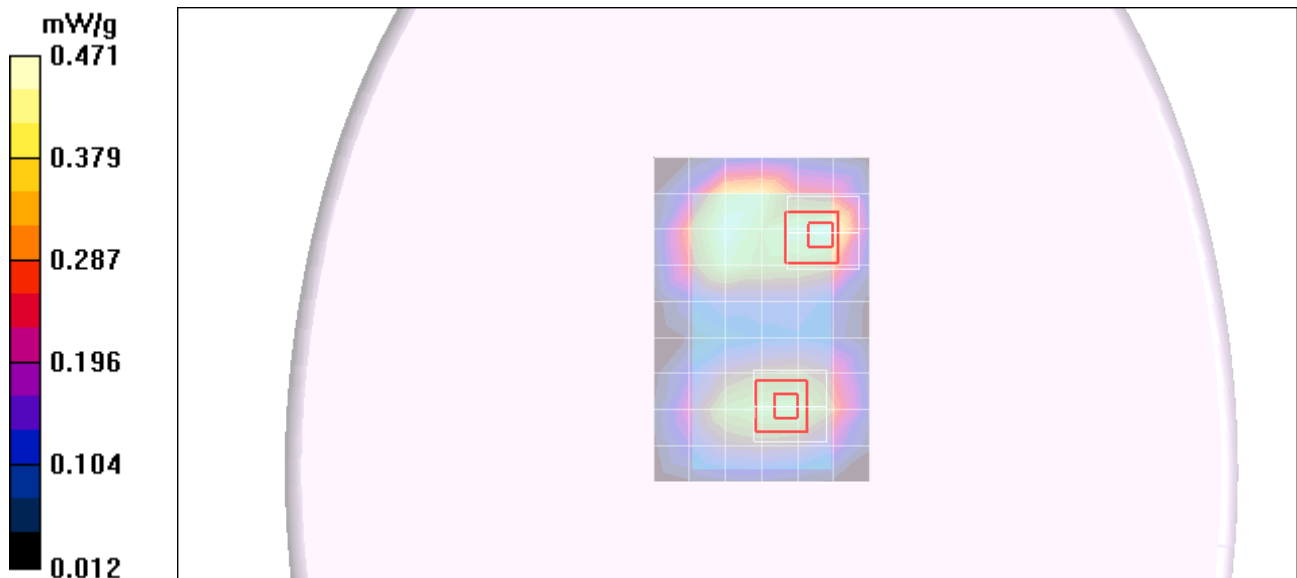

Test Laboratory: Compliance Certification Services (UL CCS)

GSM1900_Body

DUT: Apple; Type: NA; Serial: NA

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3749; ConvF(7.33, 7.33, 7.33); Calibrated: 12/13/2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 7/21/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front side_EGPRS 2 slot_M-ch/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.357 mW/g

Front side_EGPRS 2 slot_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 15.5 V/m; Power Drift = 0.085 dB

Peak SAR (extrapolated) = 0.529 W/kg

SAR(1 g) = 0.301 mW/g; SAR(10 g) = 0.181 mW/g

Maximum value of SAR (measured) = 0.372 mW/g


Front side_EGPRS 2 slot_M-ch/Zoom Scan 2 (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 15.5 V/m; Power Drift = 0.085 dB

Peak SAR (extrapolated) = 0.390 W/kg

SAR(1 g) = 0.262 mW/g; SAR(10 g) = 0.172 mW/g

Maximum value of SAR (measured) = 0.307 mW/g

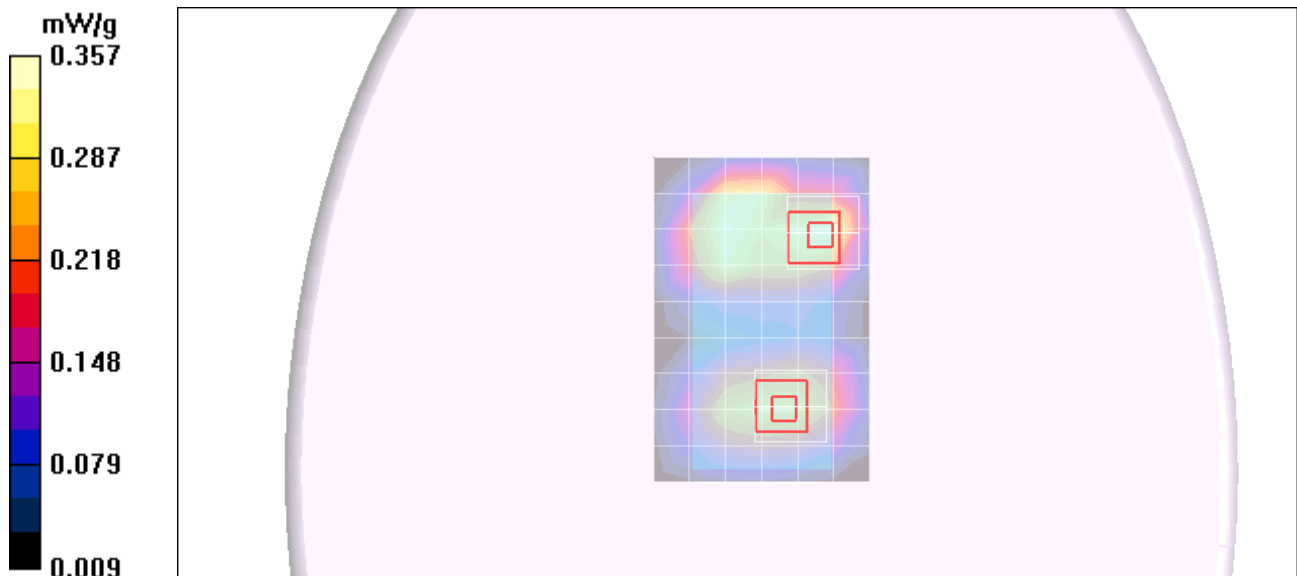

Test Laboratory: Compliance Certification Services (UL CCS)

GSM1900_Body

DUT: Apple; Type: NA; Serial: NA

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3749; ConvF(7.33, 7.33, 7.33); Calibrated: 12/13/2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 7/21/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Front side_EGPRS 1 slot_M-ch/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.170 mW/g

Front side_EGPRS 1 slot_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 10.8 V/m; Power Drift = 0.176 dB

Peak SAR (extrapolated) = 0.250 W/kg

SAR(1 g) = 0.145 mW/g; SAR(10 g) = 0.092 mW/g

Maximum value of SAR (measured) = 0.182 mW/g


Front side_EGPRS 1 slot_M-ch/Zoom Scan 2 (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 10.8 V/m; Power Drift = 0.476 dB

Peak SAR (extrapolated) = 0.209 W/kg

SAR(1 g) = 0.132 mW/g; SAR(10 g) = 0.086 mW/g

Maximum value of SAR (measured) = 0.161 mW/g

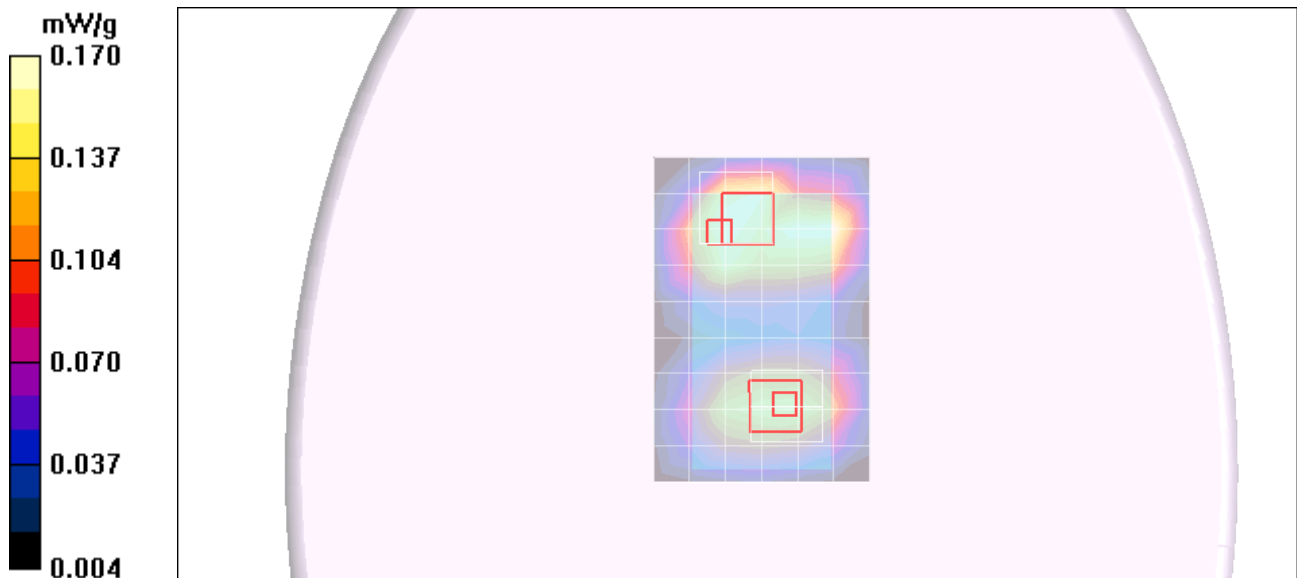

Test Laboratory: Compliance Certification Services (UL CCS)

GSM1900_Body

DUT: Apple; Type: NA; Serial: NA

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3749; ConvF(7.33, 7.33, 7.33); Calibrated: 12/13/2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 7/21/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back side_GPRS 2 slot_M-ch/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.628 mW/g

Back side_GPRS 2 slot_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 20.7 V/m; Power Drift = -0.021 dB
Peak SAR (extrapolated) = 0.988 W/kg
SAR(1 g) = 0.539 mW/g; SAR(10 g) = 0.321 mW/g
Maximum value of SAR (measured) = 0.677 mW/g

Back side_GPRS 2 slot_M-ch/Zoom Scan 2 (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 20.7 V/m; Power Drift = -0.021 dB
Peak SAR (extrapolated) = 0.696 W/kg
SAR(1 g) = 0.462 mW/g; SAR(10 g) = 0.298 mW/g
Maximum value of SAR (measured) = 0.538 mW/g



Test Laboratory: Compliance Certification Services (UL CCS)

GSM1900_Body

DUT: Apple; Type: NA; Serial: NA

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C


DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3749; ConvF(7.33, 7.33, 7.33); Calibrated: 12/13/2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 7/21/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back side_GPRS 1 slot_M-ch/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.454 mW/g

Back side_GPRS 1 slot_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 17.7 V/m; Power Drift = 0.153 dB
Peak SAR (extrapolated) = 0.734 W/kg
SAR(1 g) = 0.394 mW/g; SAR(10 g) = 0.234 mW/g
Maximum value of SAR (measured) = 0.498 mW/g

Back side_GPRS 1 slot_M-ch/Zoom Scan 2 (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 17.7 V/m; Power Drift = 0.153 dB
Peak SAR (extrapolated) = 0.500 W/kg
SAR(1 g) = 0.334 mW/g; SAR(10 g) = 0.216 mW/g
Maximum value of SAR (measured) = 0.391 mW/g

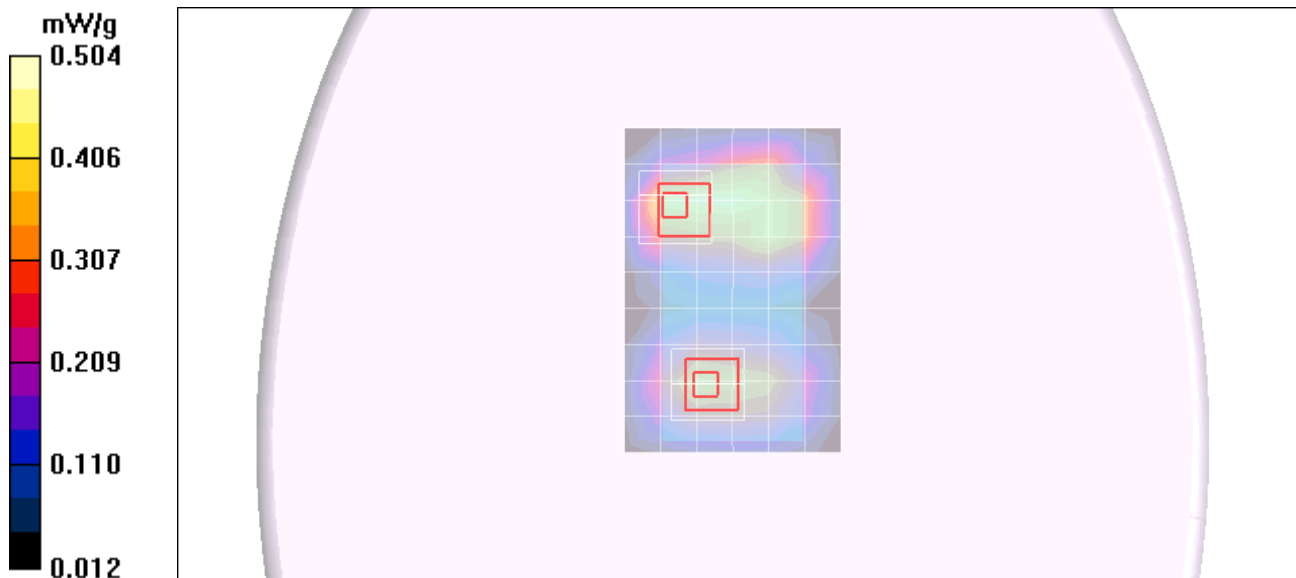

Test Laboratory: Compliance Certification Services (UL CCS)

GSM1900_Body

DUT: Apple; Type: NA; Serial: NA

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3749; ConvF(7.33, 7.33, 7.33); Calibrated: 12/13/2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 7/21/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Left edge_GPRS 2 slot_M-ch/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.645 mW/g

Left edge_GPRS 2 slot_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 21.2 V/m; Power Drift = -0.106 dB

Peak SAR (extrapolated) = 0.931 W/kg

SAR(1 g) = 0.524 mW/g; SAR(10 g) = 0.281 mW/g

Maximum value of SAR (measured) = 0.659 mW/g


Left edge_GPRS 2 slot_M-ch/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 21.2 V/m; Power Drift = -0.106 dB

Peak SAR (extrapolated) = 0.828 W/kg

SAR(1 g) = 0.495 mW/g; SAR(10 g) = 0.280 mW/g

Maximum value of SAR (measured) = 0.598 mW/g

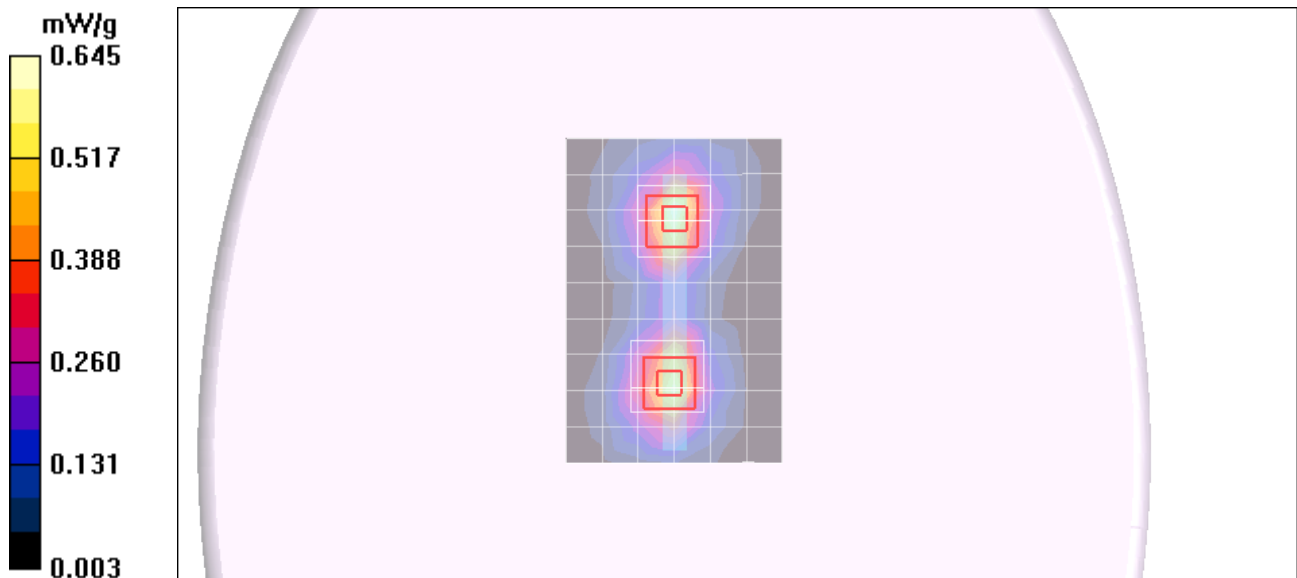

Test Laboratory: Compliance Certification Services (UL CCS)

GSM1900_Body

DUT: Apple; Type: NA; Serial: NA

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.47 \text{ mho/m}$; $\epsilon_r = 51.8$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section


Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

- DASY4 Configuration:
- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
 - Probe: EX3DV4 - SN3749; ConvF(7.33, 7.33, 7.33); Calibrated: 12/13/2010
 - Sensor-Surface: 3mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn427; Calibrated: 7/21/2010
 - Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Left edge_GPRS 1 slot_M-ch/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.470 mW/g

Left edge_GPRS 1 slot_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 18.0 V/m; Power Drift = -0.080 dB
Peak SAR (extrapolated) = 0.696 W/kg
SAR(1 g) = 0.385 mW/g; SAR(10 g) = 0.207 mW/g
Maximum value of SAR (measured) = 0.484 mW/g

Left edge_GPRS 1 slot_M-ch/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 18.0 V/m; Power Drift = -0.080 dB
Peak SAR (extrapolated) = 0.606 W/kg
SAR(1 g) = 0.362 mW/g; SAR(10 g) = 0.205 mW/g
Maximum value of SAR (measured) = 0.444 mW/g

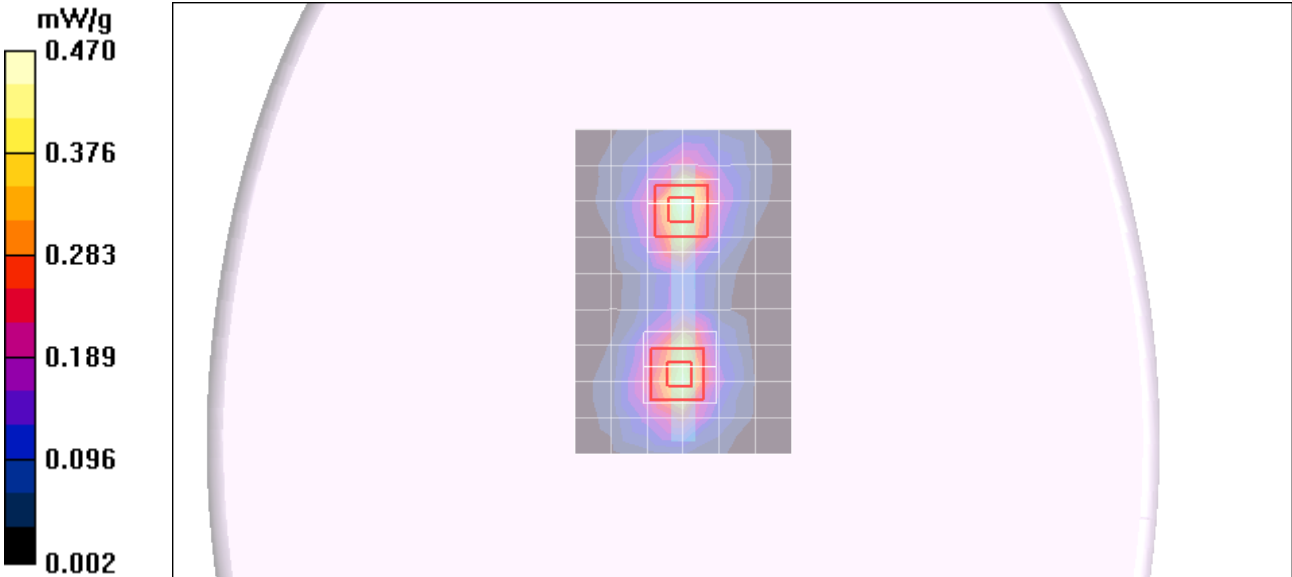

Test Laboratory: Compliance Certification Services (UL CCS)

GSM1900_Body

DUT: Apple; Type: NA; Serial: NA

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.47 \text{ mho/m}$; $\epsilon_r = 51.8$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section


Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

- DASY4 Configuration:
- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
 - Probe: EX3DV4 - SN3749; ConvF(7.33, 7.33, 7.33); Calibrated: 12/13/2010
 - Sensor-Surface: 3mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn427; Calibrated: 7/21/2010
 - Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right edge_GPRS 2 slot_M-ch/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.294 mW/g

Right edge_GPRS 2 slot_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 14.2 V/m; Power Drift = 0.011 dB
Peak SAR (extrapolated) = 0.425 W/kg
SAR(1 g) = 0.247 mW/g; SAR(10 g) = 0.138 mW/g
Maximum value of SAR (measured) = 0.304 mW/g

Right edge_GPRS 2 slot_M-ch/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 14.2 V/m; Power Drift = 0.011 dB
Peak SAR (extrapolated) = 0.340 W/kg
SAR(1 g) = 0.209 mW/g; SAR(10 g) = 0.121 mW/g
Maximum value of SAR (measured) = 0.254 mW/g

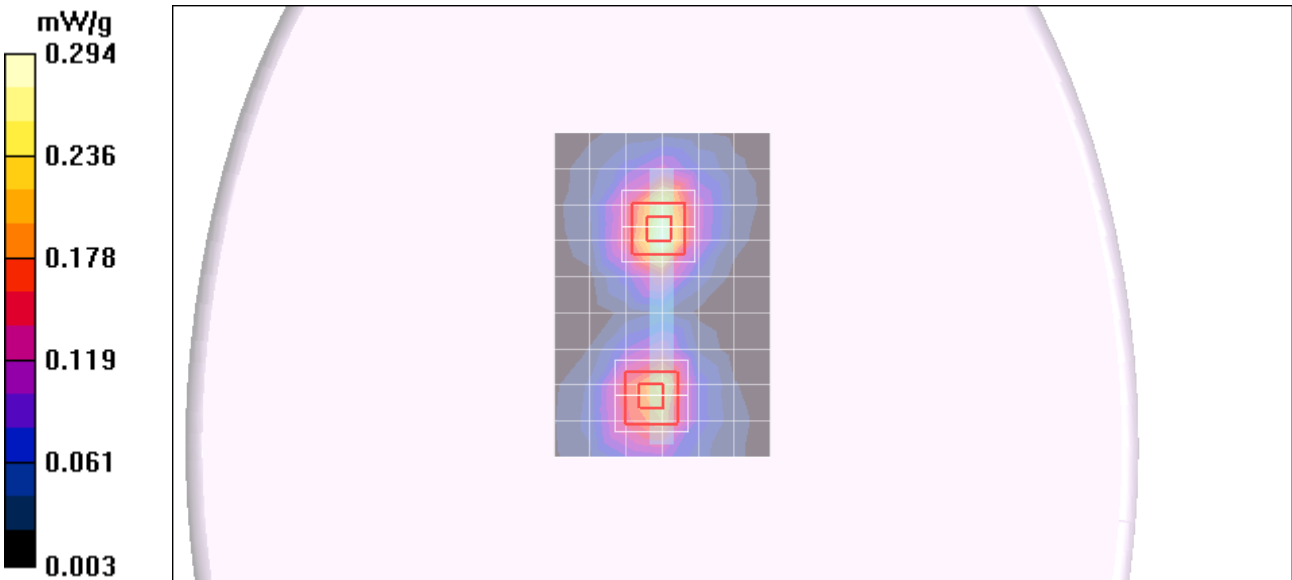

Test Laboratory: Compliance Certification Services (UL CCS)

GSM1900_Body

DUT: Apple; Type: NA; Serial: NA

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.47 \text{ mho/m}$; $\epsilon_r = 51.8$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section


Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

- DASY4 Configuration:
- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
 - Probe: EX3DV4 - SN3749; ConvF(7.33, 7.33, 7.33); Calibrated: 12/13/2010
 - Sensor-Surface: 3mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn427; Calibrated: 7/21/2010
 - Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right edge_GPRS 1 slot_M-ch/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.220 mW/g

Right edge_GPRS 1 slot_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 12.3 V/m; Power Drift = -0.077 dB
Peak SAR (extrapolated) = 0.325 W/kg
SAR(1 g) = 0.188 mW/g; SAR(10 g) = 0.105 mW/g
Maximum value of SAR (measured) = 0.231 mW/g

Right edge_GPRS 1 slot_M-ch/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 12.3 V/m; Power Drift = -0.077 dB
Peak SAR (extrapolated) = 0.251 W/kg
SAR(1 g) = 0.152 mW/g; SAR(10 g) = 0.088 mW/g
Maximum value of SAR (measured) = 0.186 mW/g

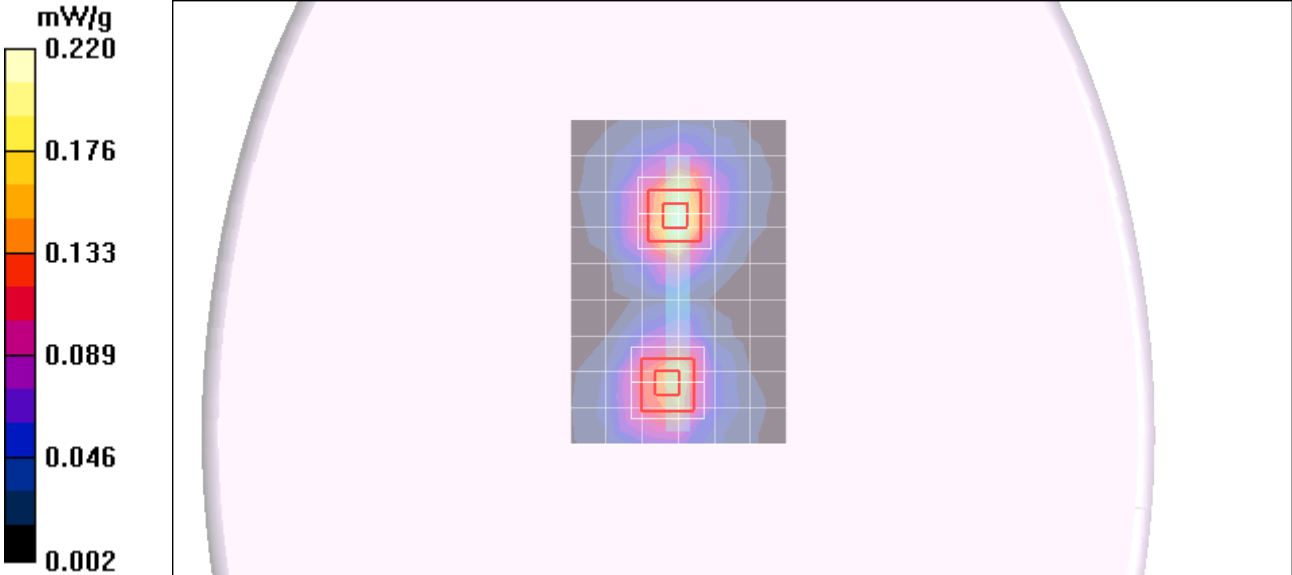

Test Laboratory: Compliance Certification Services (UL CCS)

GSM1900_Body

DUT: Apple; Type: NA; Serial: NA

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3749; ConvF(7.33, 7.33, 7.33); Calibrated: 12/13/2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 7/21/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Bottom edge_GPRS 2 slot_M-ch/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.385 mW/g


Bottom edge_GPRS 2 slot_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 16.4 V/m; Power Drift = 0.243 dB

Peak SAR (extrapolated) = 0.571 W/kg

SAR(1 g) = 0.333 mW/g; SAR(10 g) = 0.186 mW/g

Maximum value of SAR (measured) = 0.417 mW/g

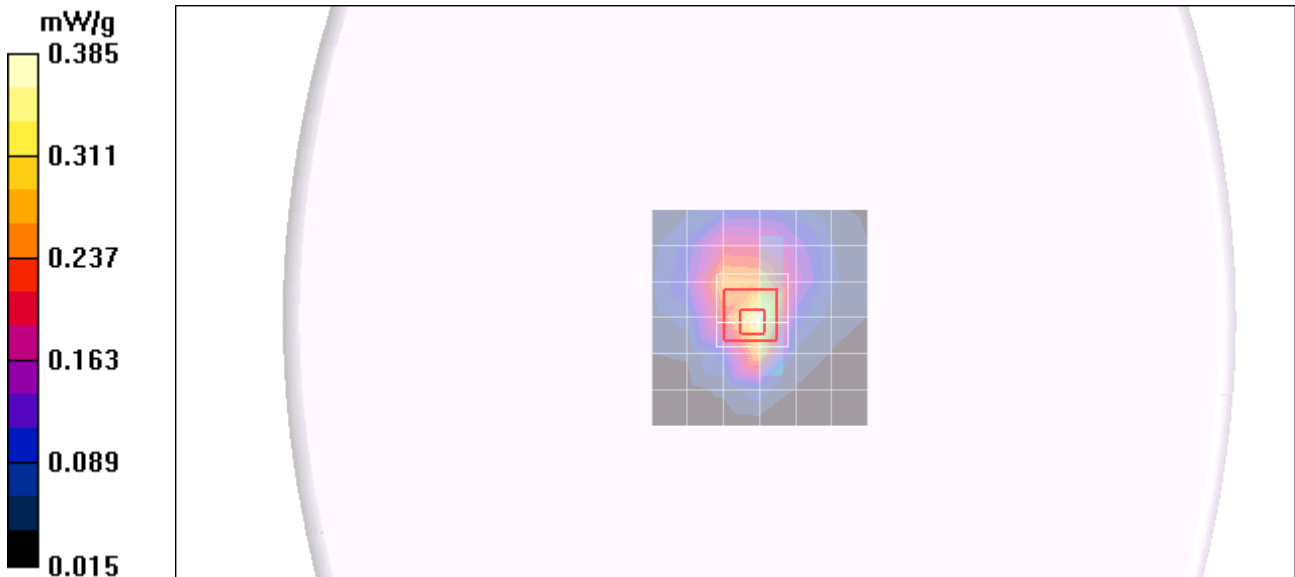

Test Laboratory: Compliance Certification Services (UL CCS)

GSM1900_Body

DUT: Apple; Type: NA; Serial: NA

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3749; ConvF(7.33, 7.33, 7.33); Calibrated: 12/13/2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 7/21/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Bottom edge_GPRS 1 slot_M-ch/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.288 mW/g

Bottom edge_GPRS 1 slot_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 14.1 V/m; Power Drift = 0.199 dB

Peak SAR (extrapolated) = 0.429 W/kg

SAR(1 g) = 0.249 mW/g; SAR(10 g) = 0.138 mW/g

Maximum value of SAR (measured) = 0.310 mW/g

