

HAC-RF Emission

Frequency: 835 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $\sigma = 0 \text{ S/m}$, $\epsilon_r = 1$; $\rho = 0 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/6/2013
- Probe: ER3DV6 - SN2509; ConvF(1, 1, 1); Calibrated: 5/29/2013;
- Sensor-Surface: (Fix Surface)
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB; Serial: 1155

Dipole E-Field measurement/835 MHz/Hearing Aid Compatibility Test at 15mm distance

(41x361x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 110.1 V/m; Power Drift = 0.03 dB


PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 111.8 V/m

Near-field category: **M4 (AWF 0 dB)**

PMF scaled E-field

Grid 1 M4 108.8 V/m	Grid 2 M4 111.1 V/m	Grid 3 M4 110.0 V/m
Grid 4 M4 61.63 V/m	Grid 5 M4 62.81 V/m	Grid 6 M4 61.88 V/m
Grid 7 M4 109.4 V/m	Grid 8 M4 111.8 V/m	Grid 9 M4 109.7 V/m

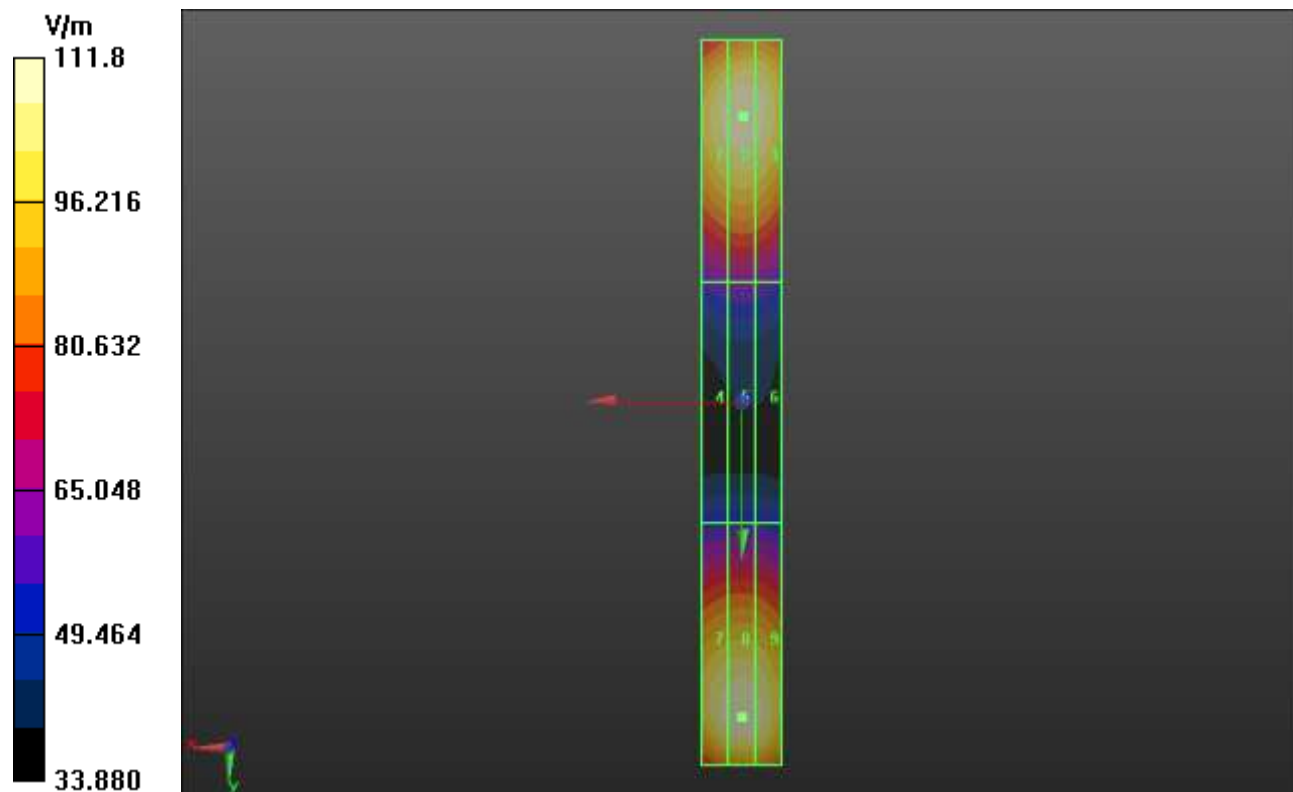

HAC-RF Emission

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $\sigma = 0 \text{ S/m}$, $\epsilon_r = 1$; $\rho = 0 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/6/2013
- Probe: ER3DV6 - SN2509; ConvF(1, 1, 1); Calibrated: 5/29/2013;
- Sensor-Surface: (Fix Surface)
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB; Serial: 1155

Dipole E-Field measurement/1880 MHz/Hearing Aid Compatibility Test at 15mm distance (41x181x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 156.7 V/m; Power Drift = 0.04 dB



PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 91.40 V/m

Near-field category: **M3 (AWF 0 dB)**

PMF scaled E-field

Grid 1 M3 89.26 V/m	Grid 2 M3 91.40 V/m	Grid 3 M3 90.42 V/m
Grid 4 M3 70.58 V/m	Grid 5 M3 71.48 V/m	Grid 6 M3 70.31 V/m
Grid 7 M3 86.14 V/m	Grid 8 M3 88.92 V/m	Grid 9 M3 88.42 V/m

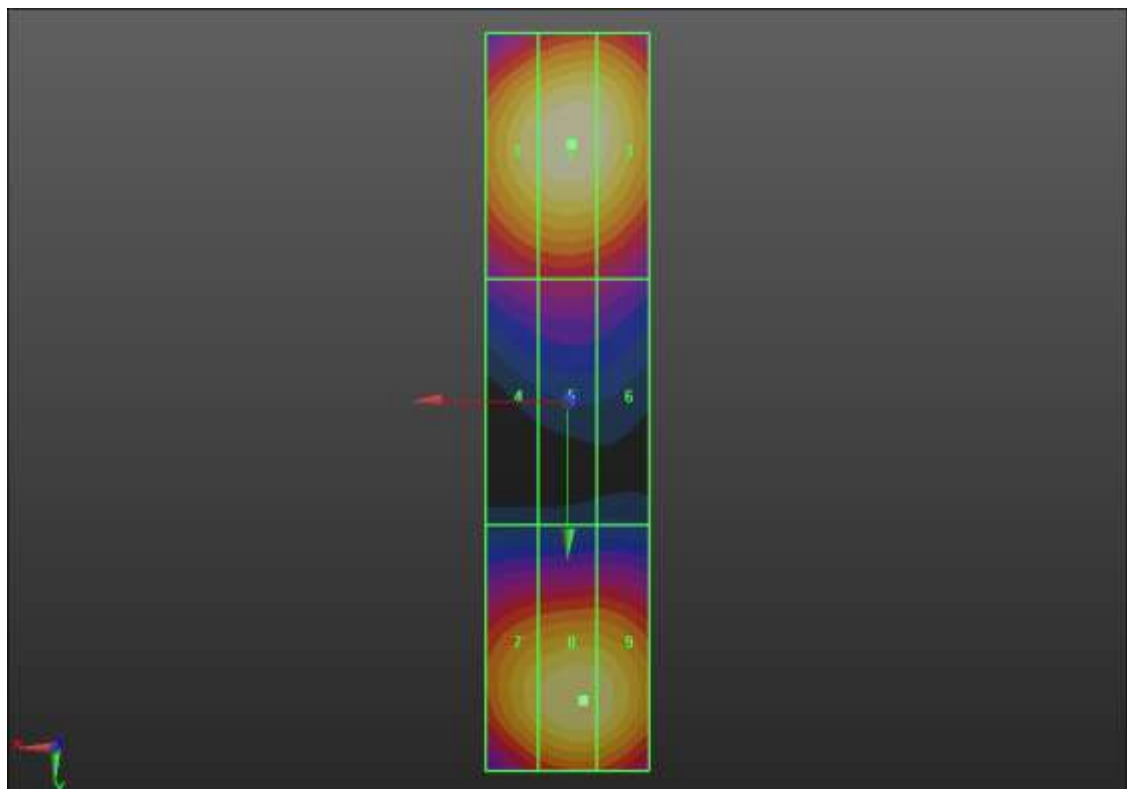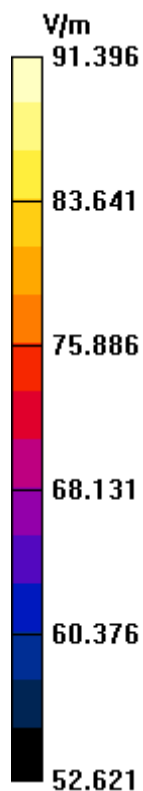

HAC-RF Emission

Communication System: UID 0, CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Phantom section: RF Section

DASY5 Configuration:

- Probe: ER3DV6 - SN2509; ConvF(1, 1, 1); Calibrated: 5/29/2013;

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn1258; Calibrated: 3/6/2013

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB

- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Dipole E-Field measurement/1880 MHz/Hearing Aid Compatibility Test at 15mm distance (41x181x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 160.0 V/m; Power Drift = 0.02 dB



PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 93.10 V/m

Near-field category: **M3 (AWF 0 dB)**

PMF scaled E-field

Grid 1 M3 91.02 V/m	Grid 2 M3 93.10 V/m	Grid 3 M3 92.17 V/m
Grid 4 M3 72.52 V/m	Grid 5 M3 73.39 V/m	Grid 6 M3 72.20 V/m
Grid 7 M3 89.56 V/m	Grid 8 M3 91.16 V/m	Grid 9 M3 90.11 V/m

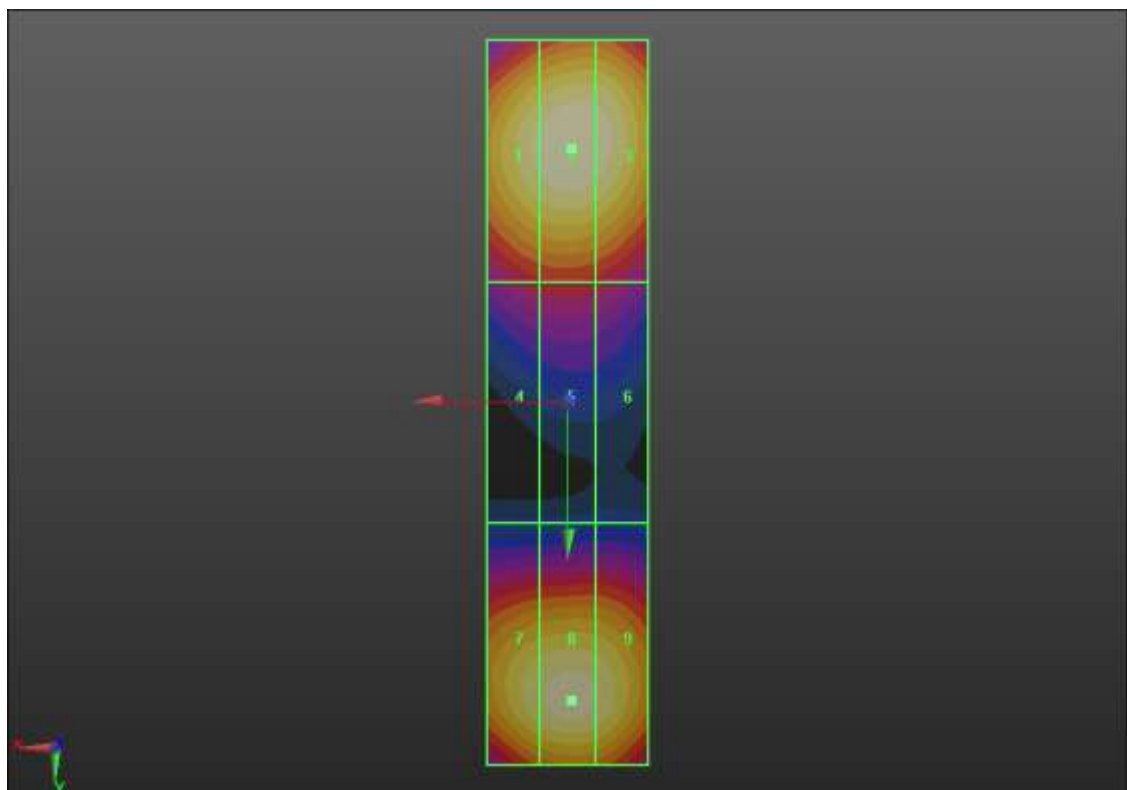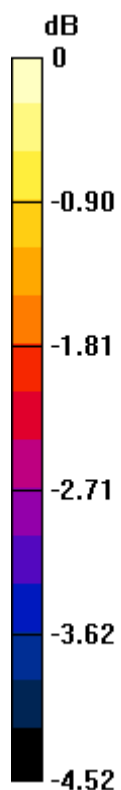

$$0 \text{ dB} = 93.10 \text{ V/m} = 39.38 \text{ dBV/m}$$

HAC-RF Emission

Communication System: UID 0, CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Phantom section: RF Section

DASY5 Configuration:

- Probe: ER3DV6 - SN2509; ConvF(1, 1, 1); Calibrated: 5/29/2013;

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn1258; Calibrated: 3/6/2013

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB

- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Dipole E-Field measurement/1880 MHz/Hearing Aid Compatibility Test at 15mm distance (41x181x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 156.4 V/m; Power Drift = 0.04 dB



PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 89.47 V/m

Near-field category: **M3 (AWF 0 dB)**

PMF scaled E-field

Grid 1 M3 86.94 V/m	Grid 2 M3 89.47 V/m	Grid 3 M3 88.91 V/m
Grid 4 M3 69.89 V/m	Grid 5 M3 70.89 V/m	Grid 6 M3 69.95 V/m
Grid 7 M3 86.60 V/m	Grid 8 M3 88.18 V/m	Grid 9 M3 86.91 V/m

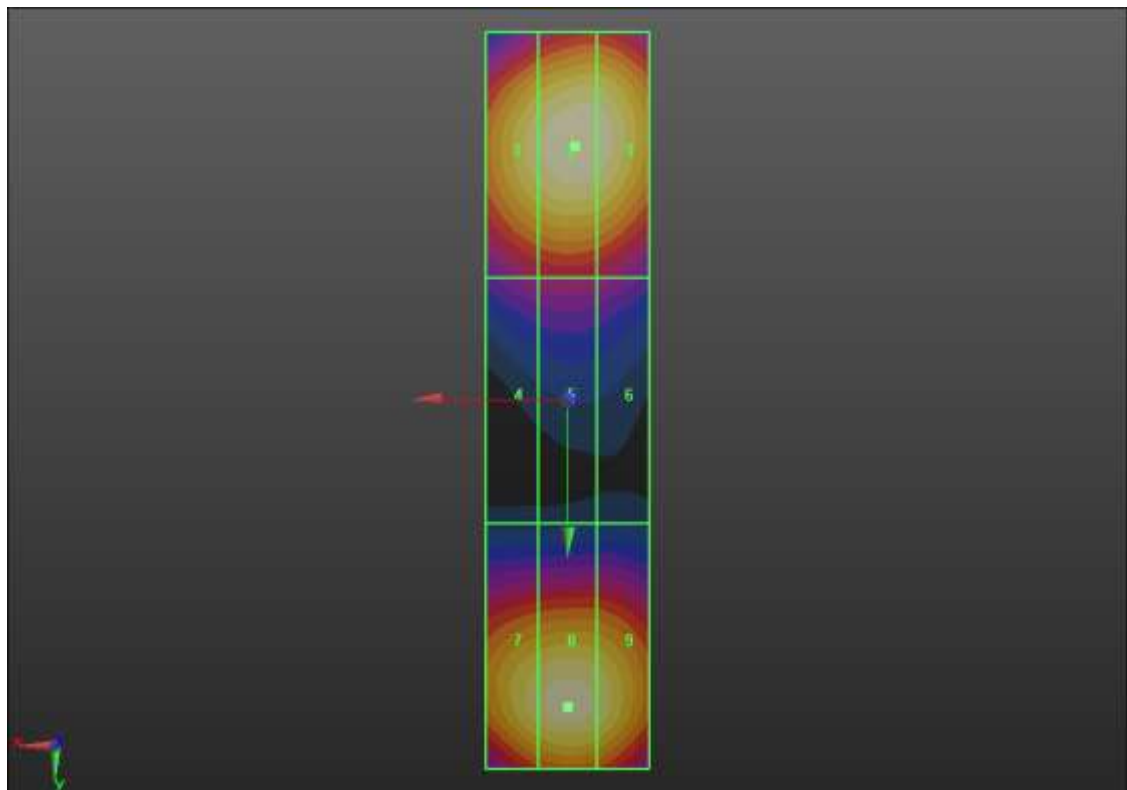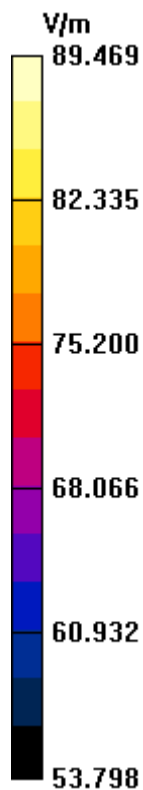

HAC-RF Emission

Communication System: UID 10021 - CAA, GSM-FDD (TDMA, GMSK); Frequency: 824.2 MHz; Duty Cycle: 1:8.6896

Phantom section: RF Section

DASY5 Configuration:

- Probe: ER3DV6 - SN2509; ConvF(1, 1, 1); Calibrated: 5/29/2013;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1258; Calibrated: 3/6/2013
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

UAT_GSM850 E-Field measurement/Voice_ch 128/Hearing Aid Compatibility Test (101x101x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 70.02 V/m; Power Drift = -0.02 dB


Applied MIF = 3.63 dB

RF audio interference level = 39.20 dBV/m

Emission category: **M4**

MIF scaled E-field

Grid 1 M4 33.68 dBV/m	Grid 2 M4 37.46 dBV/m	Grid 3 M4 37.49 dBV/m
Grid 4 M4 35.65 dBV/m	Grid 5 M4 39.2 dBV/m	Grid 6 M4 39.15 dBV/m
Grid 7 M4 38.03 dBV/m	Grid 8 M4 39.79 dBV/m	Grid 9 M4 39.45 dBV/m

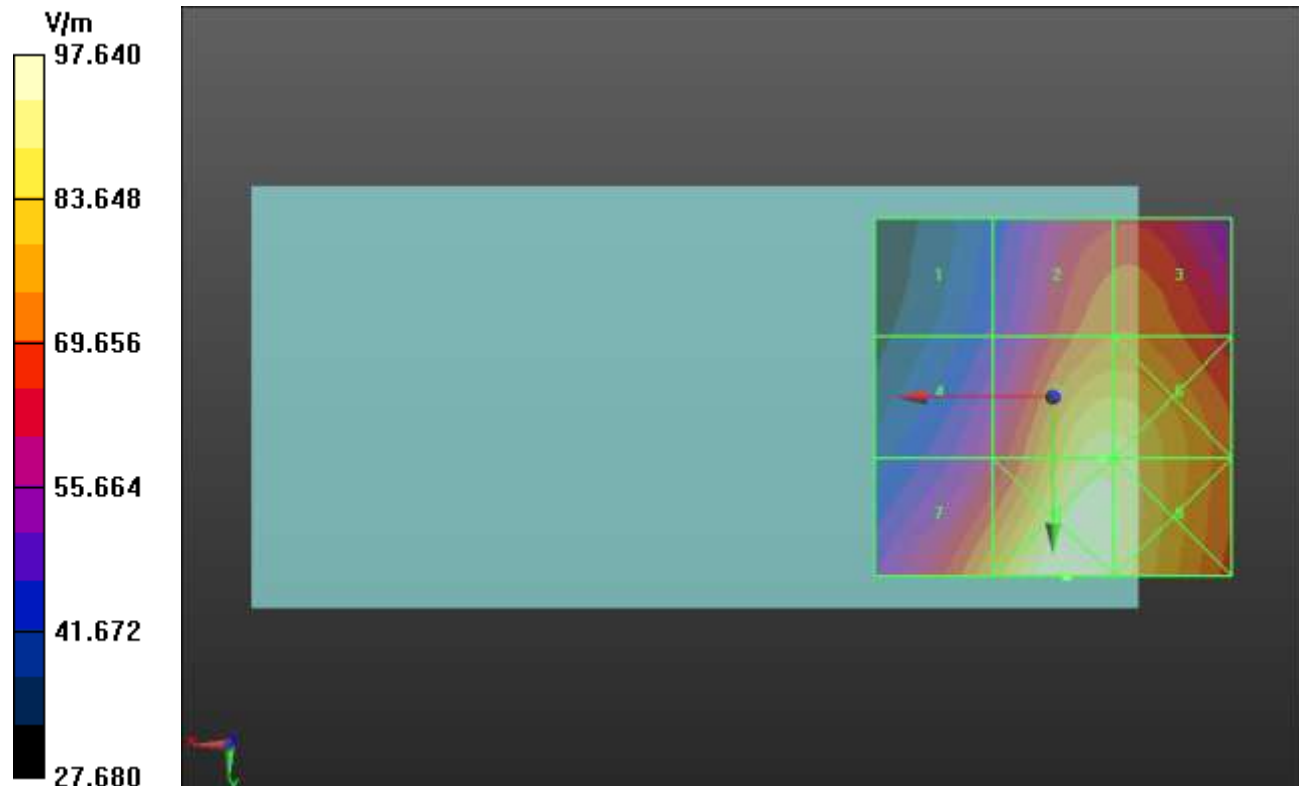

HAC-RF Emission

Communication System: UID 10021 - CAA, GSM-FDD (TDMA, GMSK); Frequency: 836.6 MHz; Duty Cycle: 1:8.6896

Phantom section: RF Section

DASY5 Configuration:

- Probe: ER3DV6 - SN2509; ConvF(1, 1, 1); Calibrated: 5/29/2013;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1258; Calibrated: 3/6/2013
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

UAT_GSM850 E-Field measurement/Voice_ch 190/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 70.59 V/m; Power Drift = -0.08 dB



Applied MIF = 3.63 dB

RF audio interference level = 39.11 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 33.89 dBV/m	Grid 2 M4 37.23 dBV/m	Grid 3 M4 37.24 dBV/m
Grid 4 M4 35.9 dBV/m	Grid 5 M4 39.11 dBV/m	Grid 6 M4 39.02 dBV/m
Grid 7 M4 38.23 dBV/m	Grid 8 M4 39.84 dBV/m	Grid 9 M4 39.39 dBV/m

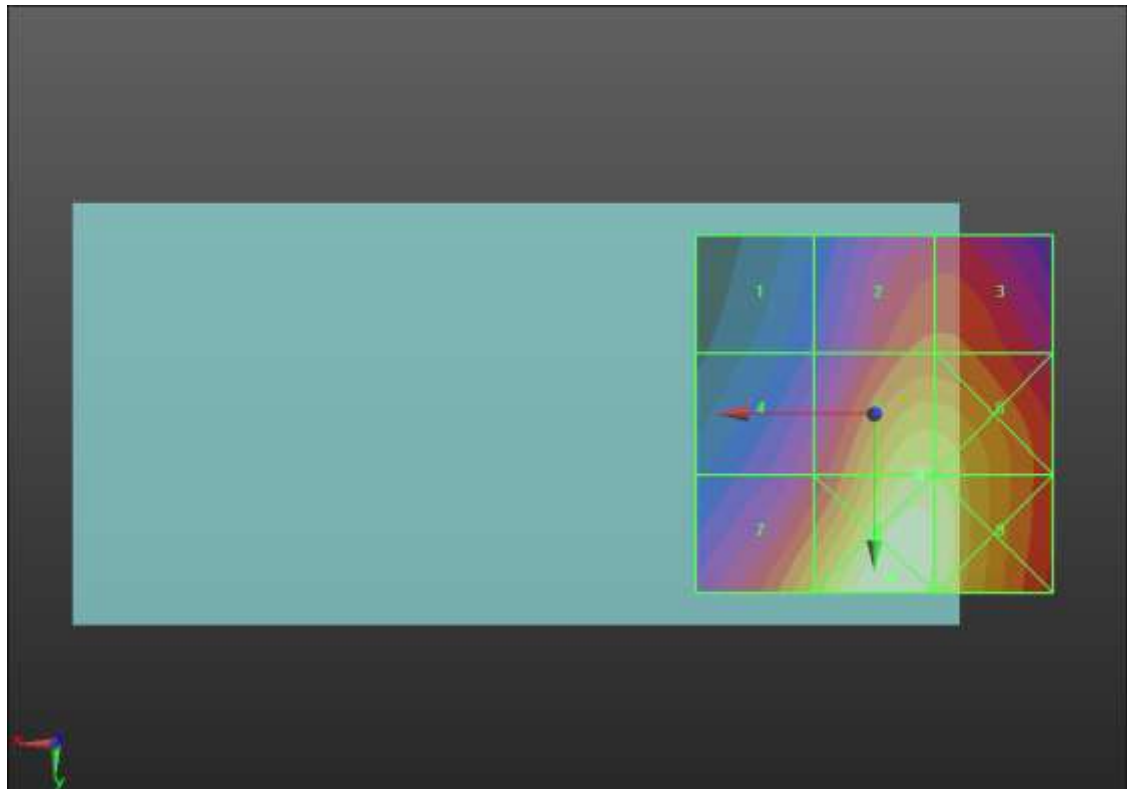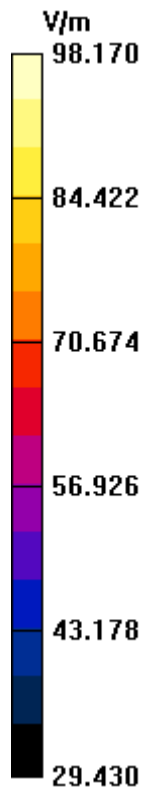

HAC-RF Emission

Communication System: UID 10021 - CAA, GSM-FDD (TDMA, GMSK); Frequency: 848.6 MHz; Duty Cycle: 1:8.6896

Phantom section: RF Section

DASY5 Configuration:

- Probe: ER3DV6 - SN2509; ConvF(1, 1, 1); Calibrated: 5/29/2013;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1258; Calibrated: 3/6/2013
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

UAT_GSM850 E-Field measurement/Voice_ch 251/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 67.88 V/m; Power Drift = 0.30 dB



Applied MIF = 3.63 dB

RF audio interference level = 38.86 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 33.42 dBV/m	Grid 2 M4 36.8 dBV/m	Grid 3 M4 36.85 dBV/m
Grid 4 M4 35.61 dBV/m	Grid 5 M4 38.86 dBV/m	Grid 6 M4 38.86 dBV/m
Grid 7 M4 38.02 dBV/m	Grid 8 M4 39.65 dBV/m	Grid 9 M4 39.23 dBV/m

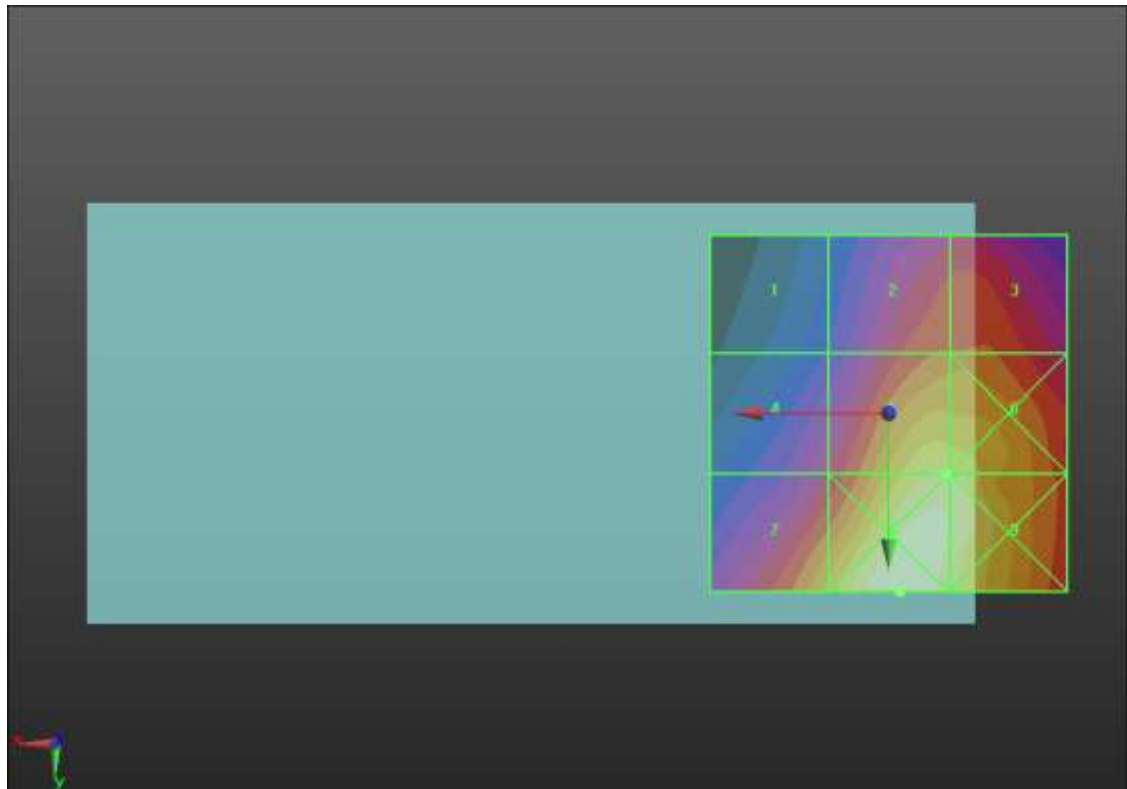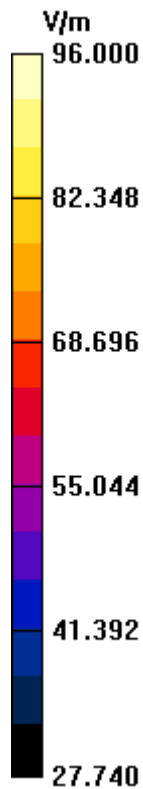

HAC-RF Emission

Communication System: UID 10021 - CAA, GSM-FDD (TDMA, GMSK); Frequency: 1850.2 MHz; Duty Cycle: 1:8.6896

Phantom section: RF Section

DASY5 Configuration:

- Probe: ER3DV6 - SN2509; ConvF(1, 1, 1); Calibrated: 5/29/2013;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1258; Calibrated: 3/6/2013
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

UAT_GSM1900 E-Field measurement/Voice_ch 512/Hearing Aid Compatibility Test (101x101x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 10.24 V/m; Power Drift = 0.26 dB



Applied MIF = 3.63 dB

RF audio interference level = 23.41 dBV/m

Emission category: **M4**

MIF scaled E-field

Grid 1 M4 23.34 dBV/m	Grid 2 M4 23.47 dBV/m	Grid 3 M4 23.54 dBV/m
Grid 4 M4 23.05 dBV/m	Grid 5 M4 23.41 dBV/m	Grid 6 M4 23.46 dBV/m
Grid 7 M4 22.62 dBV/m	Grid 8 M4 22.9 dBV/m	Grid 9 M4 22.91 dBV/m

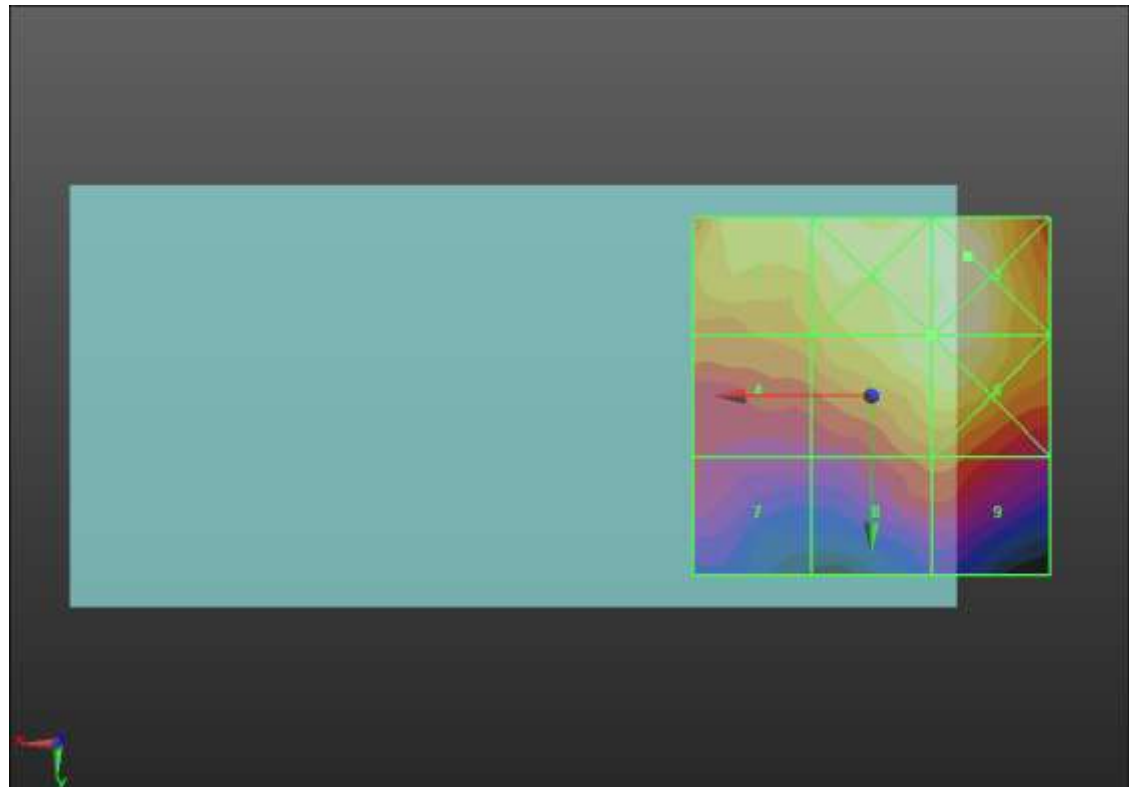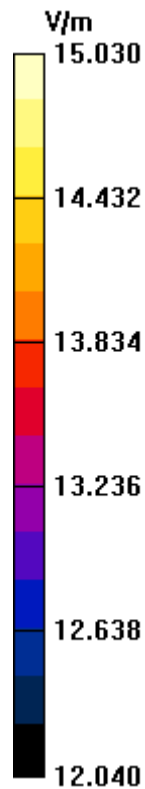

HAC-RF Emission

Communication System: UID 10021 - CAA, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz; Duty Cycle: 1:8.6896

Phantom section: RF Section

DASY5 Configuration:

- Probe: ER3DV6 - SN2509; ConvF(1, 1, 1); Calibrated: 5/29/2013;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1258; Calibrated: 3/6/2013
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

UAT_GSM1900 E-Field measurement/Voice_ch 661/Hearing Aid Compatibility Test (101x101x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 10.32 V/m; Power Drift = -0.04 dB


Applied MIF = 3.63 dB

RF audio interference level = 23.14 dBV/m

Emission category: **M4**

MIF scaled E-field

Grid 1 M4 23.12 dBV/m	Grid 2 M4 23.3 dBV/m	Grid 3 M4 23.41 dBV/m
Grid 4 M4 22.67 dBV/m	Grid 5 M4 23.14 dBV/m	Grid 6 M4 23.26 dBV/m
Grid 7 M4 22.4 dBV/m	Grid 8 M4 22.42 dBV/m	Grid 9 M4 22.49 dBV/m

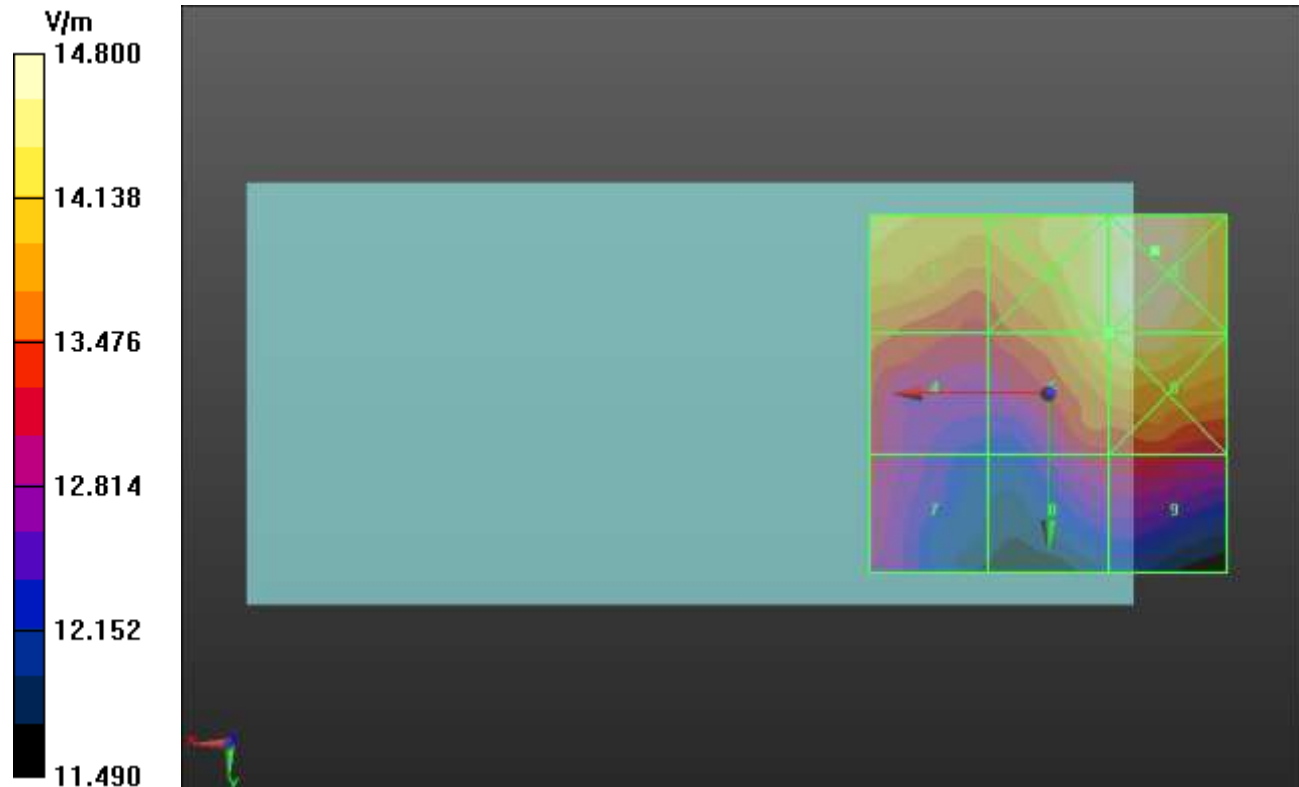

HAC-RF Emission

Communication System: UID 10021 - CAA, GSM-FDD (TDMA, GMSK); Frequency: 1909.8 MHz; Duty Cycle: 1:8.6896

Phantom section: RF Section

DASY5 Configuration:

- Probe: ER3DV6 - SN2509; ConvF(1, 1, 1); Calibrated: 5/29/2013;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1258; Calibrated: 3/6/2013
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

UAT_GSM1900 E-Field measurement/Voice_ch 810/Hearing Aid Compatibility Test (101x101x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 10.46 V/m; Power Drift = -0.09 dB


Applied MIF = 3.63 dB

RF audio interference level = 23.53 dBV/m

Emission category: **M4**

MIF scaled E-field

Grid 1 M4 23.74 dBV/m	Grid 2 M4 23.59 dBV/m	Grid 3 M4 23.62 dBV/m
Grid 4 M4 23.15 dBV/m	Grid 5 M4 23.39 dBV/m	Grid 6 M4 23.53 dBV/m
Grid 7 M4 22.72 dBV/m	Grid 8 M4 22.79 dBV/m	Grid 9 M4 22.86 dBV/m

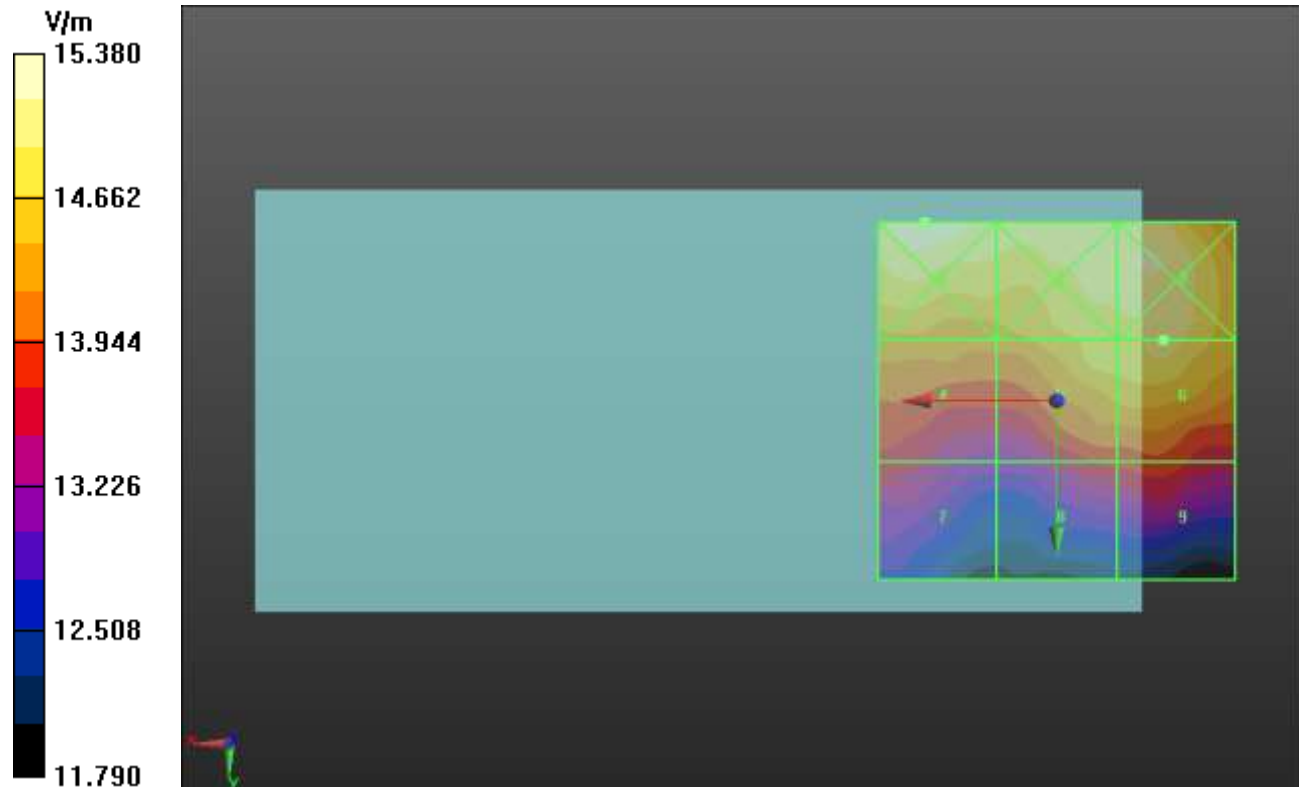

HAC-RF Emission

Communication System: UID 10021 - CAA, GSM-FDD (TDMA, GMSK); Frequency: 824.2 MHz; Duty Cycle: 1:8.6896

Phantom section: RF Section

DASY5 Configuration:

- Probe: ER3DV6 - SN2509; ConvF(1, 1, 1); Calibrated: 5/29/2013;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1258; Calibrated: 3/6/2013
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

LAT_GSM850 E-Field measurement/Voice_ch 128/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 80.56 V/m; Power Drift = -0.04 dB



Applied MIF = 3.63 dB

RF audio interference level = 40.25 dBV/m

Emission category: M3

MIF scaled E-field

Grid 1 M4 38.62 dBV/m	Grid 2 M3 40.22 dBV/m	Grid 3 M3 40.22 dBV/m
Grid 4 M4 38.54 dBV/m	Grid 5 M3 40.25 dBV/m	Grid 6 M3 40.25 dBV/m
Grid 7 M4 38.23 dBV/m	Grid 8 M3 40.03 dBV/m	Grid 9 M3 40.03 dBV/m

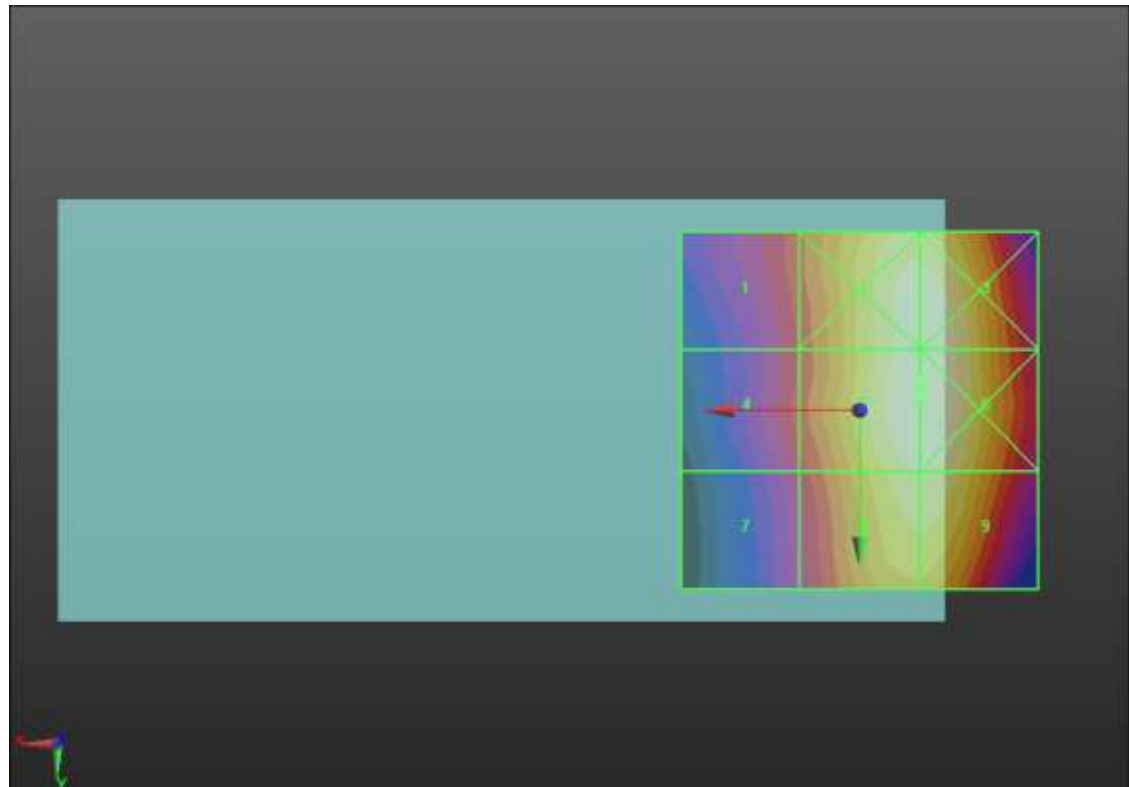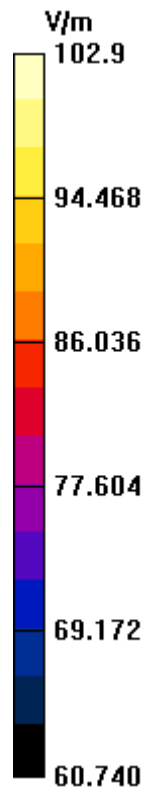

HAC-RF Emission

Communication System: UID 10021 - CAA, GSM-FDD (TDMA, GMSK); Frequency: 836.6 MHz; Duty Cycle: 1:8.6896

Phantom section: RF Section

DASY5 Configuration:

- Probe: ER3DV6 - SN2509; ConvF(1, 1, 1); Calibrated: 5/29/2013;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1258; Calibrated: 3/6/2013
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

LAT_GSM850 E-Field measurement/Voice_ch 190/Hearing Aid Compatibility Test (101x101x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 78.86 V/m; Power Drift = 0.03 dB



Applied MIF = 3.63 dB

RF audio interference level = 40.20 dBV/m

Emission category: **M3**

MIF scaled E-field

Grid 1 M4 38.4 dBV/m	Grid 2 M3 40.15 dBV/m	Grid 3 M3 40.16 dBV/m
Grid 4 M4 38.36 dBV/m	Grid 5 M3 40.2 dBV/m	Grid 6 M3 40.21 dBV/m
Grid 7 M4 38.05 dBV/m	Grid 8 M4 39.95 dBV/m	Grid 9 M4 39.95 dBV/m

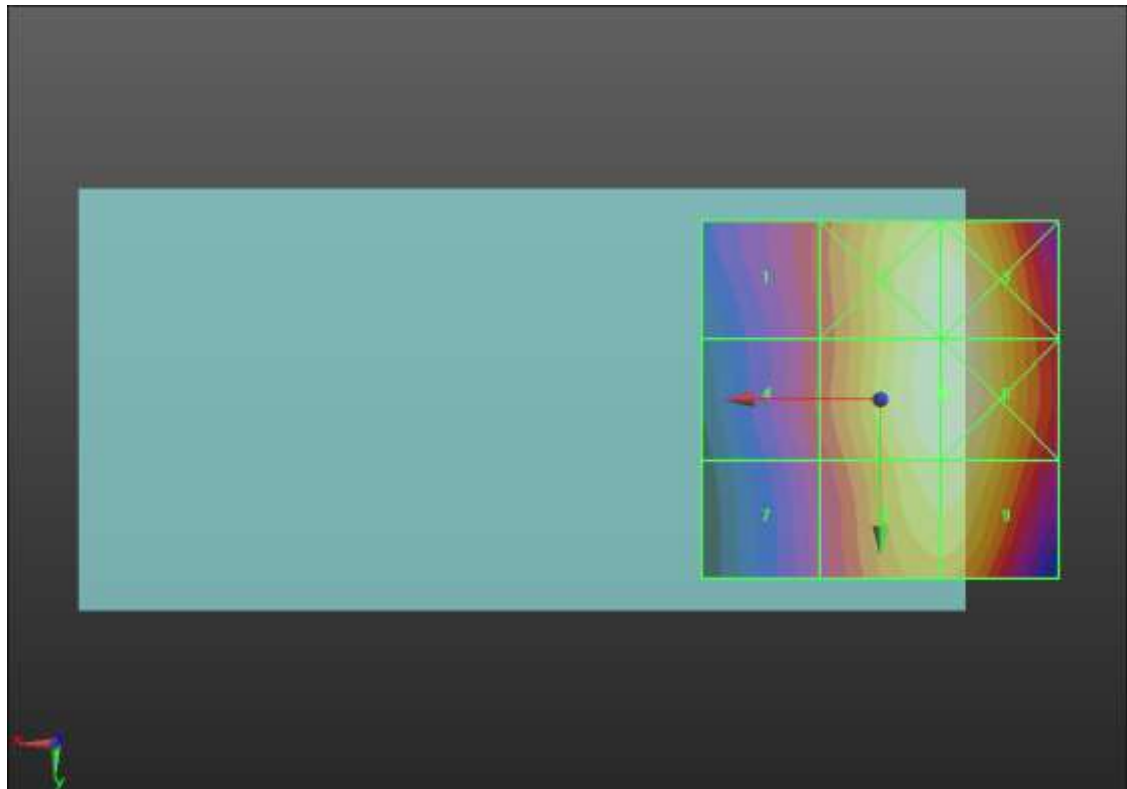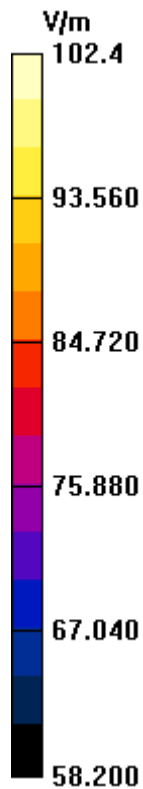

HAC-RF Emission

Communication System: UID 10021 - CAA, GSM-FDD (TDMA, GMSK); Frequency: 848.6 MHz; Duty Cycle: 1:8.6896

Phantom section: RF Section

DASY5 Configuration:

- Probe: ER3DV6 - SN2509; ConvF(1, 1, 1); Calibrated: 5/29/2013;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1258; Calibrated: 3/6/2013
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

LAT_GSM850 E-Field measurement/Voice_ch 251/Hearing Aid Compatibility Test (101x101x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 75.74 V/m; Power Drift = 0.05 dB


Applied MIF = 3.63 dB

RF audio interference level = 39.87 dBV/m

Emission category: **M4**

MIF scaled E-field

Grid 1 M4 38.02 dBV/m	Grid 2 M4 39.85 dBV/m	Grid 3 M4 39.86 dBV/m
Grid 4 M4 37.97 dBV/m	Grid 5 M4 39.87 dBV/m	Grid 6 M4 39.88 dBV/m
Grid 7 M4 37.68 dBV/m	Grid 8 M4 39.65 dBV/m	Grid 9 M4 39.66 dBV/m

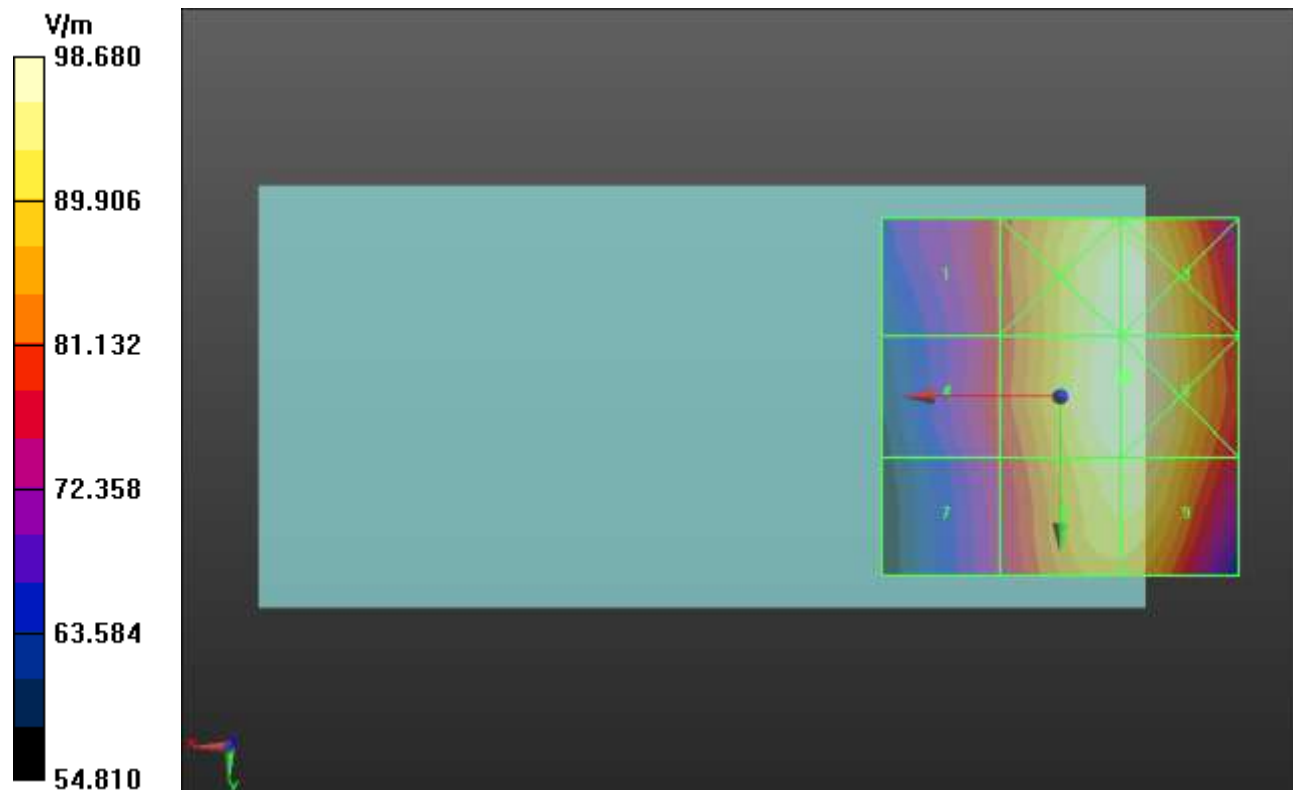

HAC-RF Emission

Communication System: UID 10021 - CAA, GSM-FDD (TDMA, GMSK); Frequency: 1850.2 MHz; Duty Cycle: 1:8.6896

Phantom section: RF Section

DASY5 Configuration:

- Probe: ER3DV6 - SN2509; ConvF(1, 1, 1); Calibrated: 5/29/2013;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1258; Calibrated: 3/6/2013
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

LAT_GSM1900 E-Field measurement/Voice_ch 512/Hearing Aid Compatibility Test (101x101x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 32.20 V/m; Power Drift = 0.06 dB



Applied MIF = 3.63 dB

RF audio interference level = 34.10 dBV/m

Emission category: **M3**

MIF scaled E-field

Grid 1 M3 30.52 dBV/m	Grid 2 M3 33.16 dBV/m	Grid 3 M3 33.6 dBV/m
Grid 4 M3 32.79 dBV/m	Grid 5 M3 33.94 dBV/m	Grid 6 M3 34.1 dBV/m
Grid 7 M2 35.64 dBV/m	Grid 8 M3 34.61 dBV/m	Grid 9 M3 34.61 dBV/m

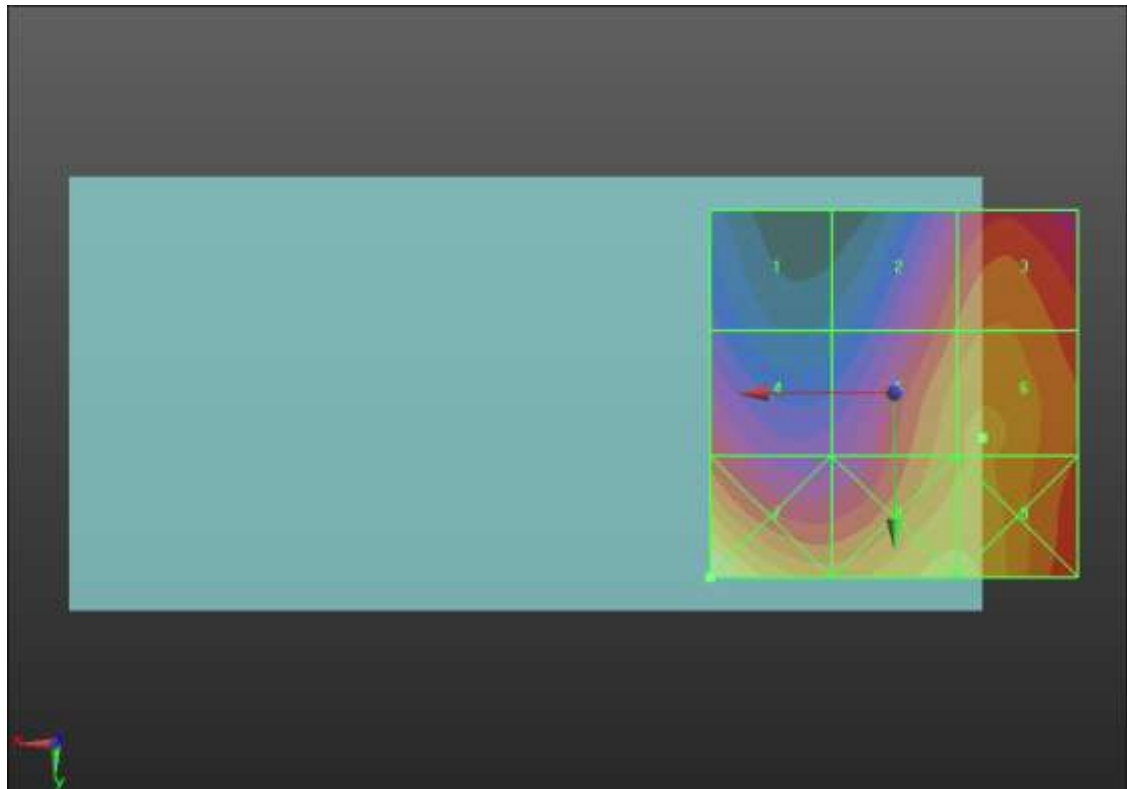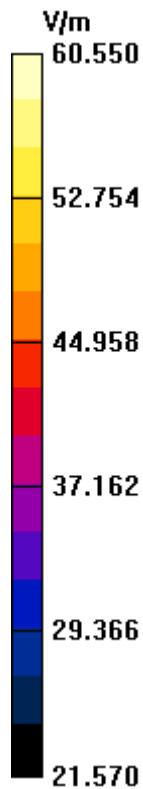

HAC-RF Emission

Communication System: UID 10021 - CAA, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz; Duty Cycle: 1:8.6896

Phantom section: RF Section

DASY5 Configuration:

- Probe: ER3DV6 - SN2509; ConvF(1, 1, 1); Calibrated: 5/29/2013;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1258; Calibrated: 3/6/2013
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

LAT_GSM1900 E-Field measurement/Voice_ch 661/Hearing Aid Compatibility Test (101x101x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 30.87 V/m; Power Drift = -0.02 dB



Applied MIF = 3.63 dB

RF audio interference level = 33.75 dBV/m

Emission category: **M3**

MIF scaled E-field

Grid 1 M3 30.83 dBV/m	Grid 2 M3 32.75 dBV/m	Grid 3 M3 33.2 dBV/m
Grid 4 M3 32.53 dBV/m	Grid 5 M3 33.62 dBV/m	Grid 6 M3 33.75 dBV/m
Grid 7 M3 34.87 dBV/m	Grid 8 M3 34.35 dBV/m	Grid 9 M3 34.34 dBV/m

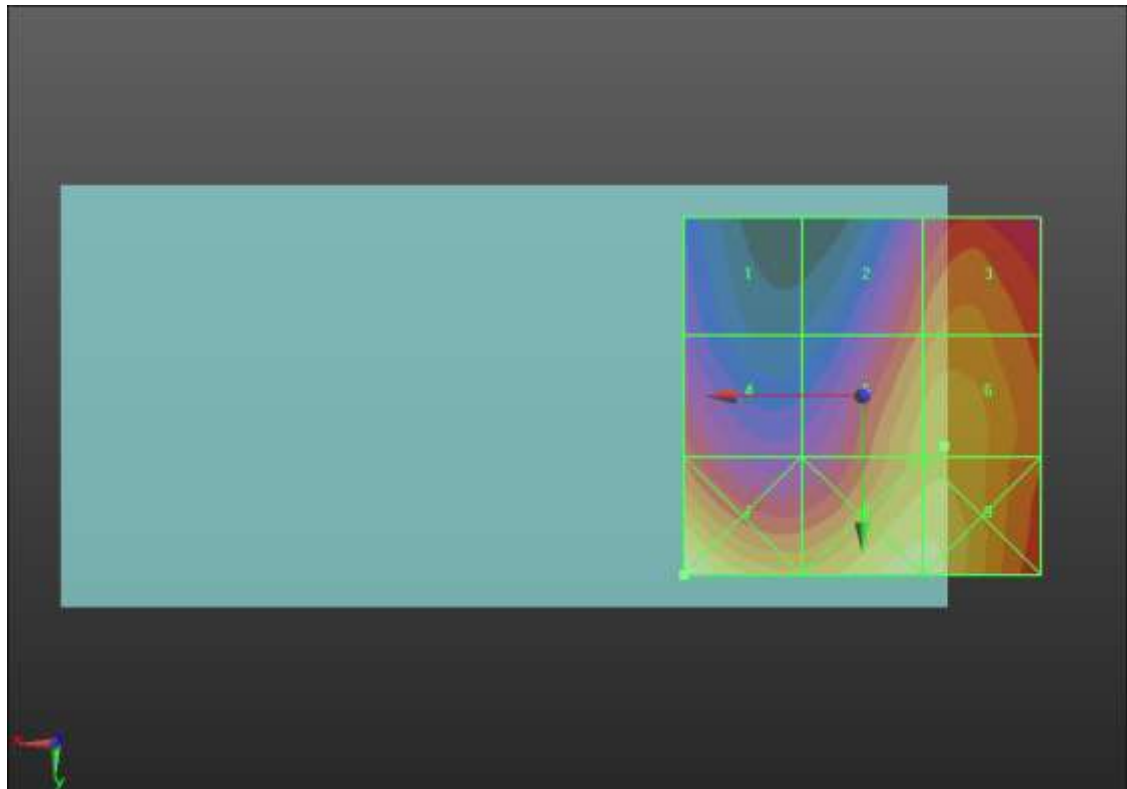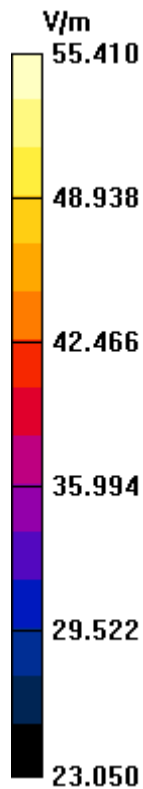

HAC-RF Emission

Communication System: UID 10021 - CAA, GSM-FDD (TDMA, GMSK); Frequency: 1909.8 MHz; Duty Cycle: 1:8.6896

Phantom section: RF Section

DASY5 Configuration:

- Probe: ER3DV6 - SN2509; ConvF(1, 1, 1); Calibrated: 5/29/2013;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1258; Calibrated: 3/6/2013
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

LAT_GSM1900 E-Field measurement/Voice_ch 810/Hearing Aid Compatibility Test (101x101x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 30.38 V/m; Power Drift = -0.04 dB

Applied MIF = 3.63 dB

RF audio interference level = 33.71 dBV/m

Emission category: **M3**

MIF scaled E-field

Grid 1 M3 30.96 dBV/m	Grid 2 M3 32.63 dBV/m	Grid 3 M3 33.04 dBV/m
Grid 4 M3 32.59 dBV/m	Grid 5 M3 33.57 dBV/m	Grid 6 M3 33.71 dBV/m
Grid 7 M3 34.86 dBV/m	Grid 8 M3 34.26 dBV/m	Grid 9 M3 34.25 dBV/m

